

ATTACHMENT TO LICENSE AMENDMENT NO. 18

TO FACILITY COMBINED LICENSE NO. NPF-91

DOCKET NO. 52-025

Replace the following pages of the Facility Combined License No. NPF-91 with the attached revised pages. The revised pages are identified by amendment number and contain marginal lines indicating the areas of change.

Facility Combined License No. NPF-91

REMOVE

INSERT

7

7

Appendix C to Facility Combined License No. NPF-91

REMOVE

INSERT

C-330

C-330

C-331

C-331

C-332

C-332

C-333

C-333

C-336

C-336

C-337

C-337

C-345

C-345

C-346

C-346

(7) Reporting Requirements

- (a) Within 30 days of a change to the initial test program described in FSAR Section 14, Initial Test Program, made in accordance with 10 CFR 50.59 or in accordance with 10 CFR Part 52, Appendix D, Section VIII, "Processes for Changes and Departures," SNC shall report the change to the Director of NRO, or the Director's designee, in accordance with 10 CFR 50.59(d).
- (b) SNC shall report any violation of a requirement in Section 2.D.(3), Section 2.D.(4), Section 2.D.(5), and Section 2.D.(6) of this license within 24 hours. Initial notification shall be made to the NRC Operations Center in accordance with 10 CFR 50.72, with written follow up in accordance with 10 CFR 50.73.

(8) Incorporation

The Technical Specifications, Environmental Protection Plan, and ITAAC in Appendices A, B, and C, respectively of this license, as revised through Amendment No. 18, are hereby incorporated into this license.

(9) Technical Specifications

The technical specifications in Appendix A to this license become effective upon a Commission finding that the acceptance criteria in this license (ITAAC) are met in accordance with 10 CFR 52.103(g).

(10) Operational Program Implementation

SNC shall implement the programs or portions of programs identified below, on or before the date SNC achieves the following milestones:

- (a) Environmental Qualification Program implemented before initial fuel load;
- (b) Reactor Vessel Material Surveillance Program implemented before initial criticality;
- (c) Preservice Testing Program implemented before initial fuel load;
- (d) Containment Leakage Rate Testing Program implemented before initial fuel load;
- (e) Fire Protection Program
 - 1. The fire protection measures in accordance with Regulatory Guide (RG) 1.189 for designated storage building areas (including adjacent fire areas that could affect the storage area) implemented before initial receipt

2.6.2 Non-Class 1E dc and Uninterruptible Power Supply System

Design Description

The non-Class 1E dc and uninterruptible power supply system (EDS) provides dc and uninterruptible ac electrical power to nonsafety-related loads during normal and off-normal conditions.

The EDS is as shown in Figure 2.6.2-1 and the component locations of the EDS are as shown in Table 2.6.2-2.

1. The functional arrangement of the EDS is as described in the Design Description of this Section 2.6.2.
2. The EDS provides the following nonsafety-related functions:
 - a) Each EDS load group 1, 2, 3, and 4 battery charger supplies the corresponding dc switchboard bus load while maintaining the corresponding battery charged.
 - b) Each EDS load group 1, 2, 3, and 4 battery supplies the corresponding dc switchboard bus load for a period of 2 hours without recharging.
 - c) Each EDS load group 1, 2, 3, and 4 inverter supplies the corresponding ac load.

| Table 2.6.2-1 Inspections, Tests, Analyses, and Acceptance Criteria | | | | |
|--|------------|---|--|---|
| No. | ITAAC No. | Design Commitment | Inspections, Tests, Analyses | Acceptance Criteria |
| 592 | 2.6.02.01 | 1. The functional arrangement of the EDS is as described in the Design Description of this Section 2.6.2. | Inspection of the as-built system will be performed. | The as-built EDS conforms with the functional arrangement as described in the Design Description of this Section 2.6.2. |
| 593 | 2.6.02.02a | 2.a) Each EDS load group 1, 2, 3, and 4 battery charger supplies the corresponding dc switchboard bus load while maintaining the corresponding battery charged. | Testing of each as-built battery charger will be performed by applying a simulated or real load, or a combination of simulated or real loads. | Each battery charger provides an output current of at least 900 amps with an output voltage in the range 105 to 140 V. |
| 594 | 2.6.02.02b | 2.b) Each EDS load group 1, 2, 3, and 4 battery supplies the corresponding dc switchboard bus load for a period of 2 hours without recharging. | Testing of each as-built battery will be performed by applying a simulated or real load, or a combination of simulated or real loads. The test will be conducted on a battery that has been fully charged and has been connected to a battery charger maintained at 135 ± 1 V for a period of no less than 24 hours prior to the test. | The battery terminal voltage is greater than or equal to 105 V after a period of no less than 2 hours, with an equivalent load greater than 850 amps. |

| Table 2.6.2-1 Inspections, Tests, Analyses, and Acceptance Criteria | | | | |
|--|------------|--|---|--|
| No. | ITAAC No. | Design Commitment | Inspections, Tests, Analyses | Acceptance Criteria |
| 595 | 2.6.02.02c | 2.c) Each EDS load group 1, 2, 3, and 4 inverter supplies the corresponding ac load. | Testing of each as-built inverter will be performed by applying a simulated or real load, or a combination of simulated or real loads, equivalent to a resistive load greater than 55 kW. | Each inverter provides a line-to-line output voltage of $208 \pm 2\%$ V at a frequency of $60 \pm 0.5\%$ Hz. |

| Table 2.6.2-2 | | |
|----------------------------------|-----------|--------------------|
| Component Name | Tag No. | Component Location |
| Load Group 1 Battery | EDS1-DB-1 | Annex Building |
| Load Group 2 Battery | EDS2-DB-1 | Annex Building |
| Load Group 3 Battery | EDS3-DB-1 | Annex Building |
| Load Group 4 Battery | EDS4-DB-1 | Annex Building |
| Load Group 1 Battery Charger | EDS1-DC-1 | Annex Building |
| Load Group 2 Battery Charger | EDS2-DC-1 | Annex Building |
| Load Group 3 Battery Charger | EDS3-DC-1 | Annex Building |
| Load Group 4 Battery Charger | EDS4-DC-1 | Annex Building |
| Load Group 1 125 Vdc Switchboard | EDS1-DS-1 | Annex Building |
| Load Group 2 125 Vdc Switchboard | EDS2-DS-1 | Annex Building |
| Load Group 3 125 Vdc Switchboard | EDS3-DS-1 | Annex Building |
| Load Group 4 125 Vdc Switchboard | EDS4-DS-1 | Annex Building |
| Load Group 1 Inverter | EDS1-DU-1 | Annex Building |
| Load Group 2 Inverter | EDS2-DU-1 | Annex Building |
| Load Group 3 Inverter | EDS3-DU-1 | Annex Building |
| Load Group 4 Inverter | EDS4-DU-1 | Annex Building |

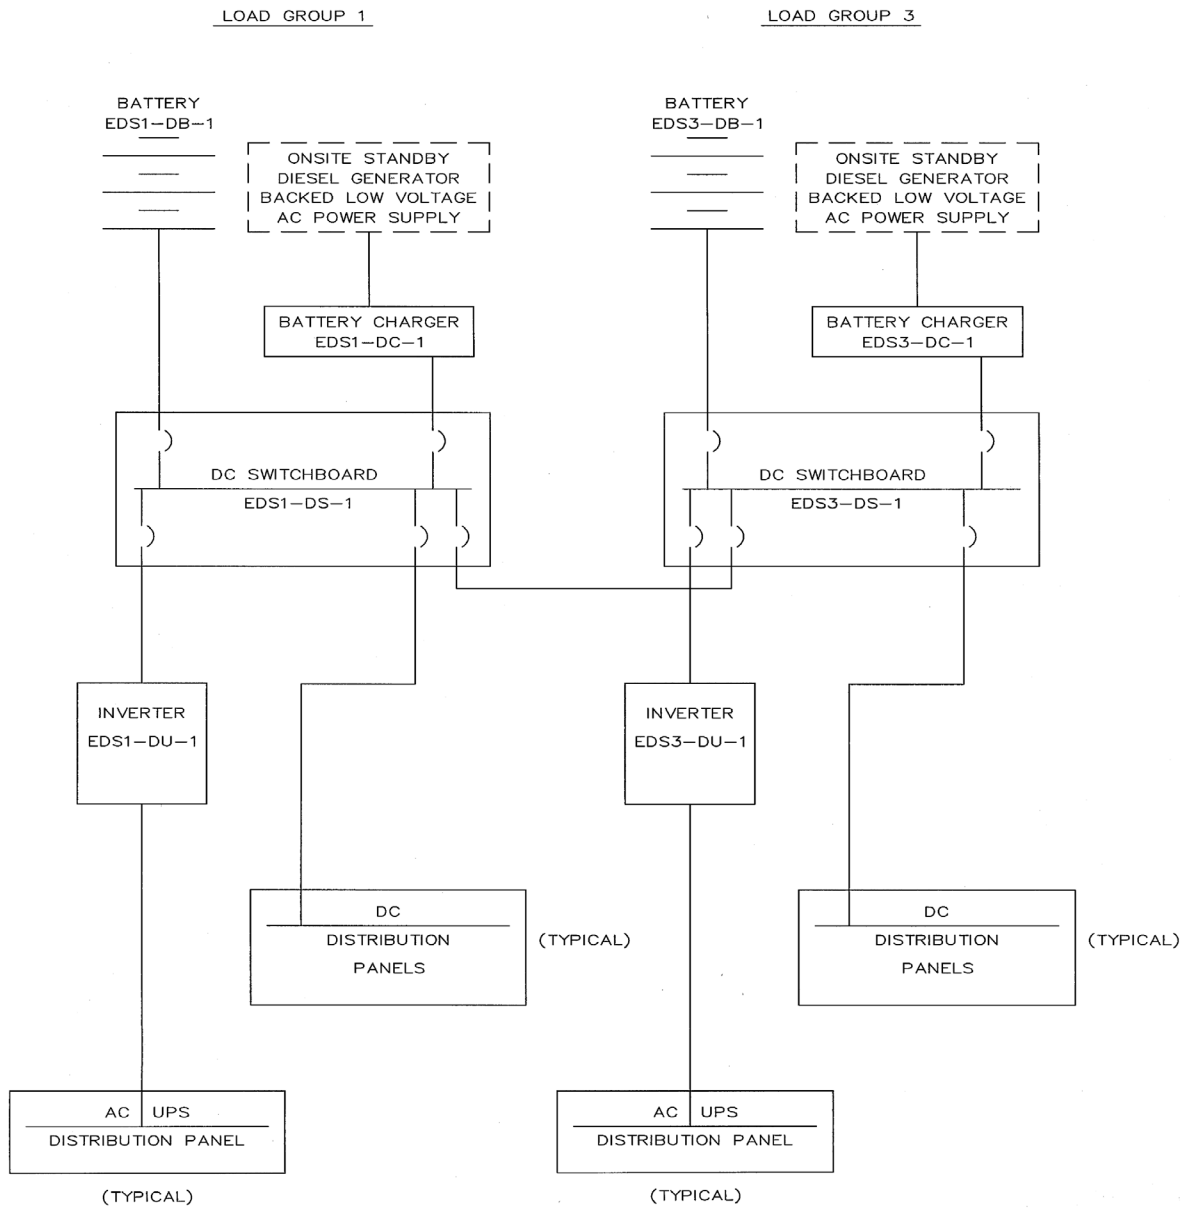


Figure 2.6.2-1 (Sheet 1 of 2)
Non-Class 1E dc and Uninterruptible Power Supply System

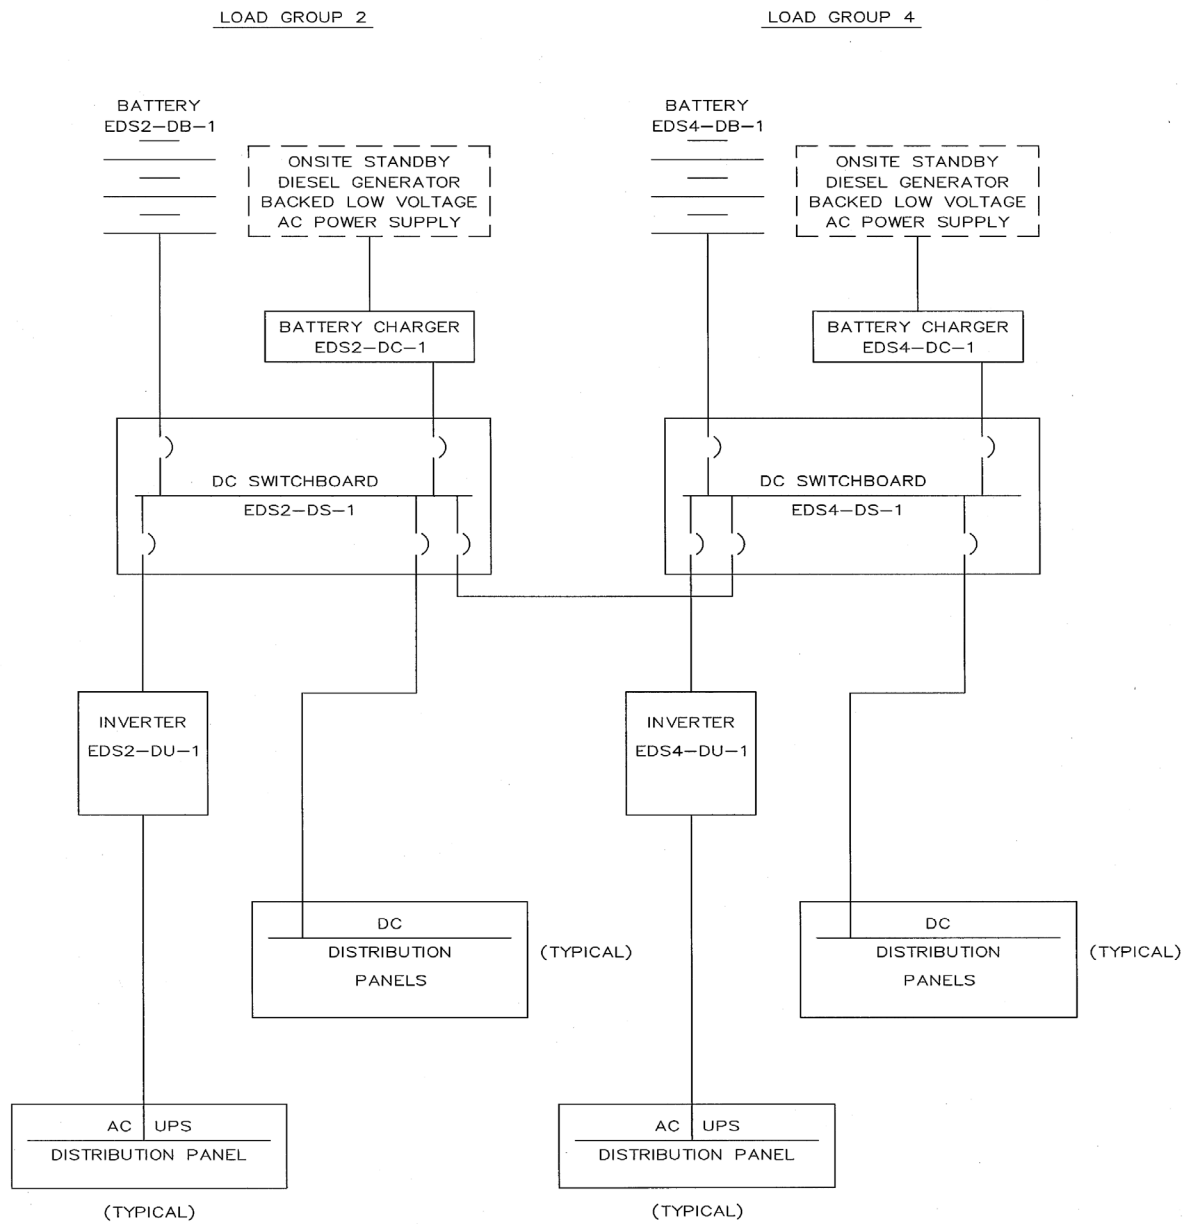


Figure 2.6.2-1 (Sheet 2 of 2)
Non-Class 1E dc and Uninterruptible Power Supply System

| Table 2.6.3-1 | | | | |
|---|-----------|----------------|-------------------------------------|------------------------|
| Equipment Name | Tag No. | Seismic Cat. I | Class 1E/ Qual. for Harsh Envir. | Safety-Related Display |
| Division D 250 Vdc Distribution Panel | IDSD-DD-1 | Yes | Yes/No | No |
| Division A 120 Vac Distribution Panel 1 | IDSA-EA-1 | Yes | Yes/No | No |
| Division A 120 Vac Distribution Panel 2 | IDSA-EA-2 | Yes | Yes/No | No |
| Division B 120 Vac Distribution Panel 1 | IDSB-EA-1 | Yes | Yes/No | No |
| Division B 120 Vac Distribution Panel 2 | IDSB-EA-2 | Yes | Yes/No | No |
| Division B 120 Vac Distribution Panel 3 | IDSB-EA-3 | Yes | Yes/No | No |
| Division C 120 Vac Distribution Panel 1 | IDSC-EA-1 | Yes | Yes/No | No |
| Division C 120 Vac Distribution Panel 2 | IDSC-EA-2 | Yes | Yes/No | No |
| Division C 120 Vac Distribution Panel 3 | IDSC-EA-3 | Yes | Yes/No | No |
| Division D 120 Vac Distribution Panel 1 | IDSD-EA-1 | Yes | Yes/No | No |
| Division D 120 Vac Distribution Panel 2 | IDSD-EA-2 | Yes | Yes/No | No |
| Division A Fuse Panel 4 | IDSA-EA-4 | Yes | Yes/No | No |
| Division B Fuse Panel 4 | IDSB-EA-4 | Yes | Yes/No | No |
| Division B Fuse Panel 5 | IDSB-EA-5 | Yes | Yes/No | No |
| Division B Fuse Panel 6 | IDSB-EA-6 | Yes | Yes/No | No |
| Division C Fuse Panel 4 | IDSC-EA-4 | Yes | Yes/No | No |
| Division C Fuse Panel 5 | IDSC-EA-5 | Yes | Yes/No | No |
| Division C Fuse Panel 6 | IDSC-EA-6 | Yes | Yes/No | No |
| Division D Fuse Panel 4 | IDSD-EA-4 | Yes | Yes/No | No |
| Division A Fused Transfer Switch Box 1 | IDSA-DF-1 | Yes | Yes/No | No |
| Division B Fused Transfer Switch Box 1 | IDSB-DF-1 | Yes | Yes/No | No |
| Division B Fused Transfer Switch Box 2 | IDSB-DF-2 | Yes | Yes/No | No |
| Division C Fused Transfer Switch Box 1 | IDSC-DF-1 | Yes | Yes/No | No |
| Division C Fused Transfer Switch Box 2 | IDSC-DF-2 | Yes | Yes/No | No |
| Division D Fused Transfer Switch Box 1 | IDSD-DF-1 | Yes | Yes/No | No |
| Spare Fused Transfer Switch Box 1 | IDSS-DF-1 | Yes | Yes/No | No |
| Division A 250 Vdc MCC | IDSA-DK-1 | Yes | Yes/No | No |

| Table 2.6.3-1 | | | | |
|-----------------------------------|-----------|----------------|-------------------------------------|------------------------|
| Equipment Name | Tag No. | Seismic Cat. I | Class 1E/ Qual. for Harsh Envir. | Safety-Related Display |
| Division B 250 Vdc MCC | IDSB-DK-1 | Yes | Yes/No | No |
| Division C 250 Vdc MCC | IDSC-DK-1 | Yes | Yes/No | No |
| Division D 250 Vdc MCC | IDSD-DK-1 | Yes | Yes/No | No |
| Division A 250 Vdc Switchboard 1 | IDSA-DS-1 | Yes | Yes/No | Yes (Bus Voltage) |
| Division B 250 Vdc Switchboard 1 | IDSB-DS-1 | Yes | Yes/No | Yes (Bus Voltage) |
| Division B 250 Vdc Switchboard 2 | IDSB-DS-2 | Yes | Yes/No | Yes (Bus Voltage) |
| Division C 250 Vdc Switchboard 1 | IDSC-DS-1 | Yes | Yes/No | Yes (Bus Voltage) |
| Division C 250 Vdc Switchboard 2 | IDSC-DS-2 | Yes | Yes/No | Yes (Bus Voltage) |
| Division D 250 Vdc Switchboard 1 | IDSD-DS-1 | Yes | Yes/No | Yes (Bus Voltage) |
| Division A Regulating Transformer | IDSA-DT-1 | Yes | Yes/No | No |
| Division B Regulating Transformer | IDSB-DT-1 | Yes | Yes/No | No |
| Division C Regulating Transformer | IDSC-DT-1 | Yes | Yes/No | No |
| Division D Regulating Transformer | IDSD-DT-1 | Yes | Yes/No | No |
| Division A 24-Hour Inverter 1 | IDSA-DU-1 | Yes | Yes/No | No |
| Division B 24-Hour Inverter 1 | IDSB-DU-1 | Yes | Yes/No | No |
| Division B 72-Hour Inverter 2 | IDSB-DU-2 | Yes | Yes/No | No |
| Division C 24-Hour Inverter 1 | IDSC-DU-1 | Yes | Yes/No | No |
| Division C 72-Hour Inverter 2 | IDSC-DU-2 | Yes | Yes/No | No |
| Division D 24-Hour Inverter 1 | IDSD-DU-1 | Yes | Yes/No | No |
| Spare Termination Box 2 | IDSS-DF-2 | Yes | Yes/No | No |
| Spare Termination Box 3 | IDSS-DF-3 | Yes | Yes/No | No |
| Spare Termination Box 4 | IDSS-DF-4 | Yes | Yes/No | No |
| Spare Termination Box 5 | IDSS-DF-5 | Yes | Yes/No | No |

| Table 2.6.3-4 | | |
|---|----------------|---------------------------|
| Component Name | Tag No. | Component Location |
| Division B 250 Vdc Distribution Panel | IDSB-DD-1 | Auxiliary Building |
| Division C 250 Vdc Distribution Panel | IDSC-DD-2 | Auxiliary Building |
| Division D 250 Vdc Distribution Panel | IDSD-DD-1 | Auxiliary Building |
| Division A 120 Vac Distribution Panel 1 | IDSA-EA-1 | Auxiliary Building |
| Division A 120 Vac Distribution Panel 2 | IDSA-EA-2 | Auxiliary Building |
| Division B 120 Vac Distribution Panel 1 | IDSB-EA-1 | Auxiliary Building |
| Division B 120 Vac Distribution Panel 2 | IDSB-EA-2 | Auxiliary Building |
| Division B 120 Vac Distribution Panel 3 | IDSB-EA-3 | Auxiliary Building |
| Division C 120 Vac Distribution Panel 1 | IDSC-EA-1 | Auxiliary Building |
| Division C 120 Vac Distribution Panel 2 | IDSC-EA-2 | Auxiliary Building |
| Division C 120 Vac Distribution Panel 3 | IDSC-EA-3 | Auxiliary Building |
| Division D 120 Vac Distribution Panel 1 | IDSD-EA-1 | Auxiliary Building |
| Division D 120 Vac Distribution Panel 2 | IDSD-EA-2 | Auxiliary Building |
| Division A Fuse Panel 4 | IDSA-EA-4 | Auxiliary Building |
| Division B Fuse Panel 4 | IDSB-EA-4 | Auxiliary Building |
| Division B Fuse Panel 5 | IDSB-EA-5 | Auxiliary Building |
| Division B Fuse Panel 6 | IDSB-EA-6 | Auxiliary Building |
| Division C Fuse Panel 4 | IDSC-EA-4 | Auxiliary Building |
| Division C Fuse Panel 5 | IDSC-EA-5 | Auxiliary Building |
| Division C Fuse Panel 6 | IDSC-EA-6 | Auxiliary Building |
| Division D Fuse Panel 4 | IDSD-EA-4 | Auxiliary Building |
| Division A Fused Transfer Switch Box 1 | IDSA-DF-1 | Auxiliary Building |
| Division B Fused Transfer Switch Box 1 | IDSB-DF-1 | Auxiliary Building |
| Division B Fused Transfer Switch Box 2 | IDSB-DF-2 | Auxiliary Building |
| Division C Fused Transfer Switch Box 1 | IDSC-DF-1 | Auxiliary Building |
| Division C Fused Transfer Switch Box 2 | IDSC-DF-2 | Auxiliary Building |
| Division D Fused Transfer Switch Box 1 | IDSD-DF-1 | Auxiliary Building |
| Spare Fused Transfer Switch Box 1 | IDSS-DF-1 | Auxiliary Building |
| Division A 250 Vdc MCC | IDSA-DK-1 | Auxiliary Building |

| Table 2.6.3-4 | | |
|-----------------------------------|----------------|---------------------------|
| Component Name | Tag No. | Component Location |
| Division B 250 Vdc MCC | IDSB-DK-1 | Auxiliary Building |
| Division C 250 Vdc MCC | IDSC-DK-1 | Auxiliary Building |
| Division D 250 Vdc MCC | IDSD-DK-1 | Auxiliary Building |
| Division A 250 Vdc Switchboard 1 | IDSA-DS-1 | Auxiliary Building |
| Division B 250 Vdc Switchboard 1 | IDSB-DS-1 | Auxiliary Building |
| Division B 250 Vdc Switchboard 2 | IDSB-DS-2 | Auxiliary Building |
| Division C 250 Vdc Switchboard 1 | IDSC-DS-1 | Auxiliary Building |
| Division C 250 Vdc Switchboard 2 | IDSC-DS-2 | Auxiliary Building |
| Division D 250 Vdc Switchboard 1 | IDSD-DS-1 | Auxiliary Building |
| Division A Regulating Transformer | IDSA-DT-1 | Auxiliary Building |
| Division B Regulating Transformer | IDSB-DT-1 | Auxiliary Building |
| Division C Regulating Transformer | IDSC-DT-1 | Auxiliary Building |
| Division D Regulating Transformer | IDSD-DT-1 | Auxiliary Building |
| Division A 24-Hour Inverter 1 | IDSA-DU-1 | Auxiliary Building |
| Division B 24-Hour Inverter 1 | IDSB-DU-1 | Auxiliary Building |
| Division B 72-Hour Inverter 2 | IDSB-DU-2 | Auxiliary Building |
| Division C 24-Hour Inverter 1 | IDSC-DU-1 | Auxiliary Building |
| Division C 72-Hour Inverter 2 | IDSC-DU-2 | Auxiliary Building |
| Division D 24-Hour Inverter 1 | IDSD-DU-1 | Auxiliary Building |
| Spare Termination Box 2 | IDSS-DF-2 | Auxiliary Building |
| Spare Termination Box 3 | IDSS-DF-3 | Auxiliary Building |
| Spare Termination Box 4 | IDSS-DF-4 | Auxiliary Building |
| Spare Termination Box 5 | IDSS-DF-5 | Auxiliary Building |

ATTACHMENT TO LICENSE AMENDMENT NO. 18

TO FACILITY COMBINED LICENSE NO. NPF-92

DOCKET NO. 52-026

Replace the following pages of the Facility Combined License No. NPF-92 with the attached revised pages. The revised pages are identified by amendment number and contain marginal lines indicating the areas of change.

Facility Combined License No. NPF-92

REMOVE

INSERT

7

7

Appendix C to Facility Combined License No. NPF-92

REMOVE

INSERT

C-330

C-330

C-331

C-331

C-332

C-332

C-333

C-333

C-336

C-336

C-337

C-337

C-345

C-345

C-346

C-346

(7) Reporting Requirements

- (a) Within 30 days of a change to the initial test program described in FSAR Section 14, Initial Test Program, made in accordance with 10 CFR 50.59 or in accordance with 10 CFR Part 52, Appendix D, Section VIII, "Processes for Changes and Departures," SNC shall report the change to the Director of NRO, or the Director's designee, in accordance with 10 CFR 50.59(d).
- (b) SNC shall report any violation of a requirement in Section 2.D.(3), Section 2.D.(4), Section 2.D.(5), and Section 2.D.(6) of this license within 24 hours. Initial notification shall be made to the NRC Operations Center in accordance with 10 CFR 50.72, with written follow up in accordance with 10 CFR 50.73.

(8) Incorporation

The Technical Specifications, Environmental Protection Plan, and ITAAC in Appendices A, B, and C, respectively of this license, as revised through Amendment No. 18, are hereby incorporated into this license. |

(9) Technical Specifications

The technical specifications in Appendix A to this license become effective upon a Commission finding that the acceptance criteria in this license (ITAAC) are met in accordance with 10 CFR 52.103(g).

(10) Operational Program Implementation

SNC shall implement the programs or portions of programs identified below, on or before the date SNC achieves the following milestones:

- (a) Environmental Qualification Program implemented before initial fuel load;
- (b) Reactor Vessel Material Surveillance Program implemented before initial criticality;
- (c) Preservice Testing Program implemented before initial fuel load;
- (d) Containment Leakage Rate Testing Program implemented before initial fuel load;
- (e) Fire Protection Program
 - 1. The fire protection measures in accordance with Regulatory Guide (RG) 1.189 for designated storage building areas (including adjacent fire areas that could affect the storage area) implemented before initial receipt

2.6.2 Non-Class 1E dc and Uninterruptible Power Supply System

Design Description

The non-Class 1E dc and uninterruptible power supply system (EDS) provides dc and uninterruptible ac electrical power to nonsafety-related loads during normal and off-normal conditions.

The EDS is as shown in Figure 2.6.2-1 and the component locations of the EDS are as shown in Table 2.6.2-2.

1. The functional arrangement of the EDS is as described in the Design Description of this Section 2.6.2.
2. The EDS provides the following nonsafety-related functions:
 - a) Each EDS load group 1, 2, 3, and 4 battery charger supplies the corresponding dc switchboard bus load while maintaining the corresponding battery charged.
 - b) Each EDS load group 1, 2, 3, and 4 battery supplies the corresponding dc switchboard bus load for a period of 2 hours without recharging.
 - c) Each EDS load group 1, 2, 3, and 4 inverter supplies the corresponding ac load.

| Table 2.6.2-1 Inspections, Tests, Analyses, and Acceptance Criteria | | | | |
|--|------------|---|--|---|
| No. | ITAAC No. | Design Commitment | Inspections, Tests, Analyses | Acceptance Criteria |
| 592 | 2.6.02.01 | 1. The functional arrangement of the EDS is as described in the Design Description of this Section 2.6.2. | Inspection of the as-built system will be performed. | The as-built EDS conforms with the functional arrangement as described in the Design Description of this Section 2.6.2. |
| 593 | 2.6.02.02a | 2.a) Each EDS load group 1, 2, 3, and 4 battery charger supplies the corresponding dc switchboard bus load while maintaining the corresponding battery charged. | Testing of each as-built battery charger will be performed by applying a simulated or real load, or a combination of simulated or real loads. | Each battery charger provides an output current of at least 900 amps with an output voltage in the range 105 to 140 V. |
| 594 | 2.6.02.02b | 2.b) Each EDS load group 1, 2, 3, and 4 battery supplies the corresponding dc switchboard bus load for a period of 2 hours without recharging. | Testing of each as-built battery will be performed by applying a simulated or real load, or a combination of simulated or real loads. The test will be conducted on a battery that has been fully charged and has been connected to a battery charger maintained at 135 ± 1 V for a period of no less than 24 hours prior to the test. | The battery terminal voltage is greater than or equal to 105 V after a period of no less than 2 hours, with an equivalent load greater than 850 amps. |

| Table 2.6.2-1 Inspections, Tests, Analyses, and Acceptance Criteria | | | | |
|--|------------|--|---|--|
| No. | ITAAC No. | Design Commitment | Inspections, Tests, Analyses | Acceptance Criteria |
| 595 | 2.6.02.02c | 2.c) Each EDS load group 1, 2, 3, and 4 inverter supplies the corresponding ac load. | Testing of each as-built inverter will be performed by applying a simulated or real load, or a combination of simulated or real loads, equivalent to a resistive load greater than 55 kW. | Each inverter provides a line-to-line output voltage of $208 \pm 2\%$ V at a frequency of $60 \pm 0.5\%$ Hz. |

| Table 2.6.2-2 | | |
|----------------------------------|-----------|--------------------|
| Component Name | Tag No. | Component Location |
| Load Group 1 Battery | EDS1-DB-1 | Annex Building |
| Load Group 2 Battery | EDS2-DB-1 | Annex Building |
| Load Group 3 Battery | EDS3-DB-1 | Annex Building |
| Load Group 4 Battery | EDS4-DB-1 | Annex Building |
| Load Group 1 Battery Charger | EDS1-DC-1 | Annex Building |
| Load Group 2 Battery Charger | EDS2-DC-1 | Annex Building |
| Load Group 3 Battery Charger | EDS3-DC-1 | Annex Building |
| Load Group 4 Battery Charger | EDS4-DC-1 | Annex Building |
| Load Group 1 125 Vdc Switchboard | EDS1-DS-1 | Annex Building |
| Load Group 2 125 Vdc Switchboard | EDS2-DS-1 | Annex Building |
| Load Group 3 125 Vdc Switchboard | EDS3-DS-1 | Annex Building |
| Load Group 4 125 Vdc Switchboard | EDS4-DS-1 | Annex Building |
| Load Group 1 Inverter | EDS1-DU-1 | Annex Building |
| Load Group 2 Inverter | EDS2-DU-1 | Annex Building |
| Load Group 3 Inverter | EDS3-DU-1 | Annex Building |
| Load Group 4 Inverter | EDS4-DU-1 | Annex Building |

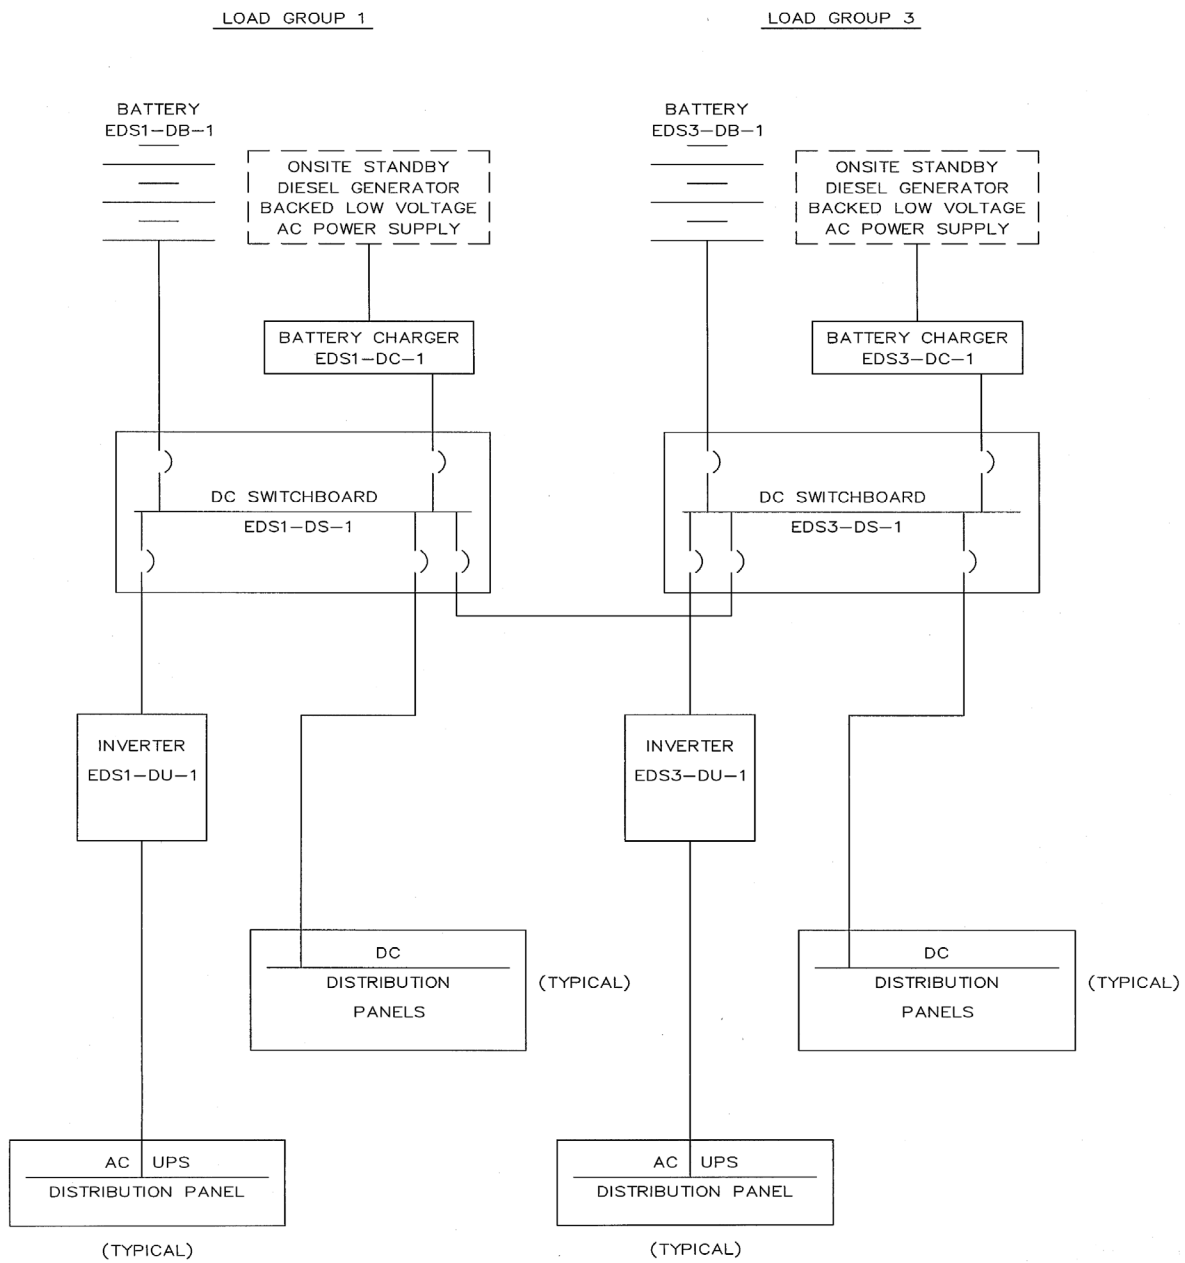


Figure 2.6.2-1 (Sheet 1 of 2)
Non-Class 1E dc and Uninterruptible Power Supply System

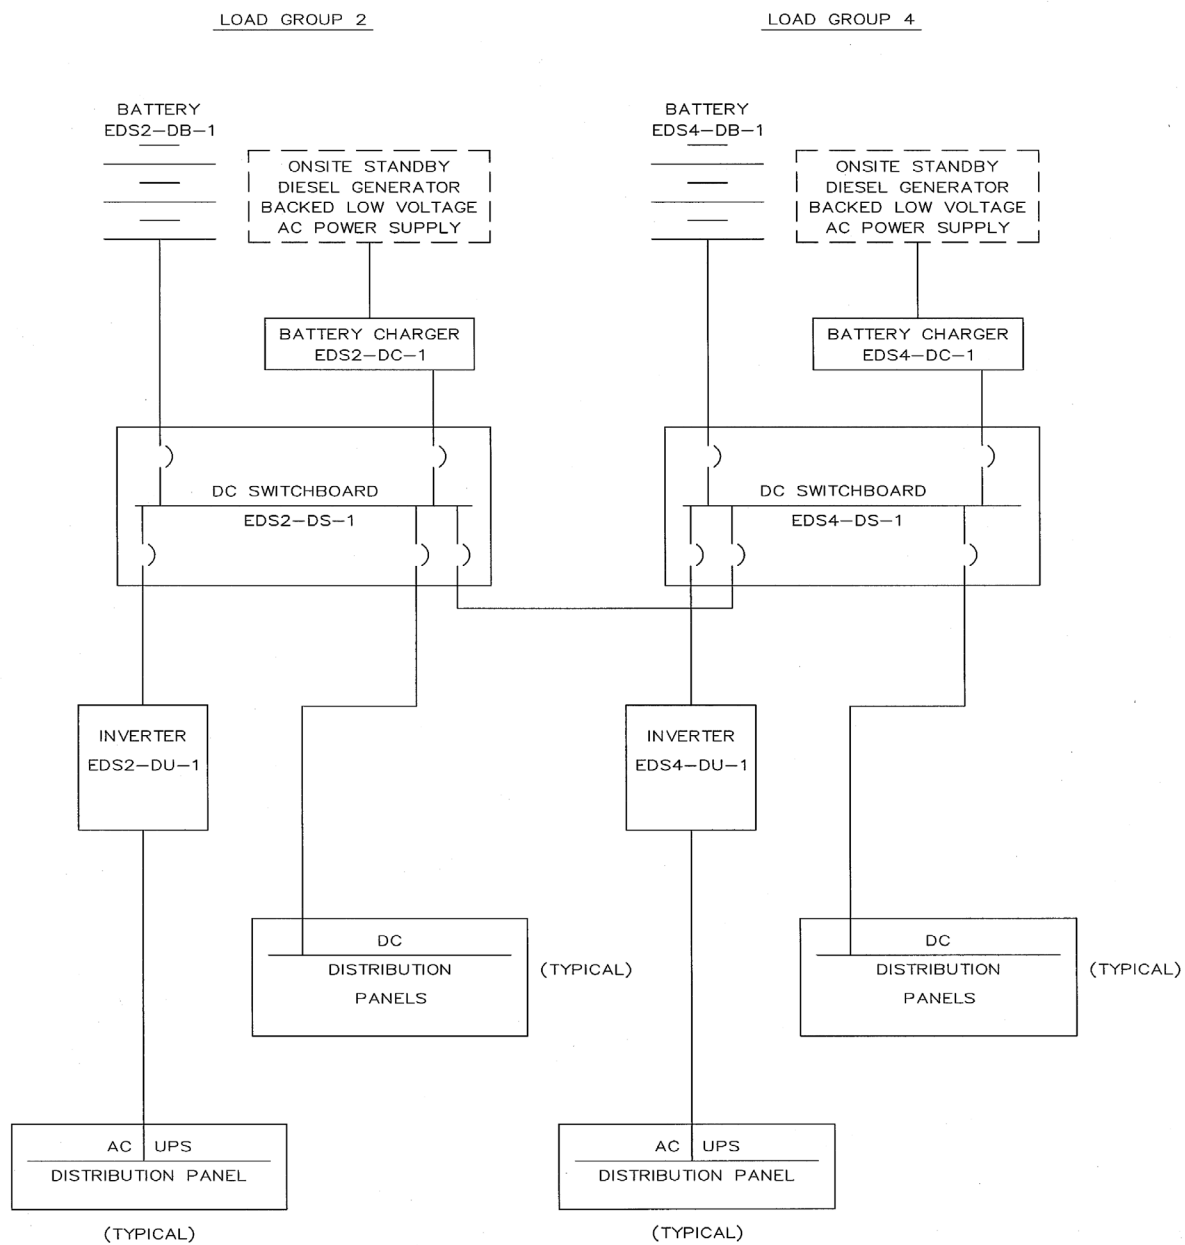


Figure 2.6.2-1 (Sheet 2 of 2)
Non-Class 1E dc and Uninterruptible Power Supply System

| Table 2.6.3-1 | | | | |
|---|----------------|-----------------------|---|-------------------------------|
| Equipment Name | Tag No. | Seismic Cat. I | Class 1E/ Qual. for Harsh Envir. | Safety-Related Display |
| Division D 250 Vdc Distribution Panel | IDSD-DD-1 | Yes | Yes/No | No |
| Division A 120 Vac Distribution Panel 1 | IDSA-EA-1 | Yes | Yes/No | No |
| Division A 120 Vac Distribution Panel 2 | IDSA-EA-2 | Yes | Yes/No | No |
| Division B 120 Vac Distribution Panel 1 | IDSB-EA-1 | Yes | Yes/No | No |
| Division B 120 Vac Distribution Panel 2 | IDSB-EA-2 | Yes | Yes/No | No |
| Division B 120 Vac Distribution Panel 3 | IDSB-EA-3 | Yes | Yes/No | No |
| Division C 120 Vac Distribution Panel 1 | IDSC-EA-1 | Yes | Yes/No | No |
| Division C 120 Vac Distribution Panel 2 | IDSC-EA-2 | Yes | Yes/No | No |
| Division C 120 Vac Distribution Panel 3 | IDSC-EA-3 | Yes | Yes/No | No |
| Division D 120 Vac Distribution Panel 1 | IDSD-EA-1 | Yes | Yes/No | No |
| Division D 120 Vac Distribution Panel 2 | IDSD-EA-2 | Yes | Yes/No | No |
| Division A Fuse Panel 4 | IDSA-EA-4 | Yes | Yes/No | No |
| Division B Fuse Panel 4 | IDSB-EA-4 | Yes | Yes/No | No |
| Division B Fuse Panel 5 | IDSB-EA-5 | Yes | Yes/No | No |
| Division B Fuse Panel 6 | IDSB-EA-6 | Yes | Yes/No | No |
| Division C Fuse Panel 4 | IDSC-EA-4 | Yes | Yes/No | No |
| Division C Fuse Panel 5 | IDSC-EA-5 | Yes | Yes/No | No |
| Division C Fuse Panel 6 | IDSC-EA-6 | Yes | Yes/No | No |
| Division D Fuse Panel 4 | IDSD-EA-4 | Yes | Yes/No | No |
| Division A Fused Transfer Switch Box 1 | IDSA-DF-1 | Yes | Yes/No | No |
| Division B Fused Transfer Switch Box 1 | IDSB-DF-1 | Yes | Yes/No | No |
| Division B Fused Transfer Switch Box 2 | IDSB-DF-2 | Yes | Yes/No | No |
| Division C Fused Transfer Switch Box 1 | IDSC-DF-1 | Yes | Yes/No | No |
| Division C Fused Transfer Switch Box 2 | IDSC-DF-2 | Yes | Yes/No | No |
| Division D Fused Transfer Switch Box 1 | IDSD-DF-1 | Yes | Yes/No | No |
| Spare Fused Transfer Switch Box 1 | IDSS-DF-1 | Yes | Yes/No | No |
| Division A 250 Vdc MCC | IDSA-DK-1 | Yes | Yes/No | No |

| Table 2.6.3-1 | | | | |
|-----------------------------------|-----------|----------------|-------------------------------------|------------------------|
| Equipment Name | Tag No. | Seismic Cat. I | Class 1E/ Qual. for Harsh Envir. | Safety-Related Display |
| Division B 250 Vdc MCC | IDSB-DK-1 | Yes | Yes/No | No |
| Division C 250 Vdc MCC | IDSC-DK-1 | Yes | Yes/No | No |
| Division D 250 Vdc MCC | IDSD-DK-1 | Yes | Yes/No | No |
| Division A 250 Vdc Switchboard 1 | IDSA-DS-1 | Yes | Yes/No | Yes (Bus Voltage) |
| Division B 250 Vdc Switchboard 1 | IDSB-DS-1 | Yes | Yes/No | Yes (Bus Voltage) |
| Division B 250 Vdc Switchboard 2 | IDSB-DS-2 | Yes | Yes/No | Yes (Bus Voltage) |
| Division C 250 Vdc Switchboard 1 | IDSC-DS-1 | Yes | Yes/No | Yes (Bus Voltage) |
| Division C 250 Vdc Switchboard 2 | IDSC-DS-2 | Yes | Yes/No | Yes (Bus Voltage) |
| Division D 250 Vdc Switchboard 1 | IDSD-DS-1 | Yes | Yes/No | Yes (Bus Voltage) |
| Division A Regulating Transformer | IDSA-DT-1 | Yes | Yes/No | No |
| Division B Regulating Transformer | IDSB-DT-1 | Yes | Yes/No | No |
| Division C Regulating Transformer | IDSC-DT-1 | Yes | Yes/No | No |
| Division D Regulating Transformer | IDSD-DT-1 | Yes | Yes/No | No |
| Division A 24-Hour Inverter 1 | IDSA-DU-1 | Yes | Yes/No | No |
| Division B 24-Hour Inverter 1 | IDSB-DU-1 | Yes | Yes/No | No |
| Division B 72-Hour Inverter 2 | IDSB-DU-2 | Yes | Yes/No | No |
| Division C 24-Hour Inverter 1 | IDSC-DU-1 | Yes | Yes/No | No |
| Division C 72-Hour Inverter 2 | IDSC-DU-2 | Yes | Yes/No | No |
| Division D 24-Hour Inverter 1 | IDSD-DU-1 | Yes | Yes/No | No |
| Spare Termination Box 2 | IDSS-DF-2 | Yes | Yes/No | No |
| Spare Termination Box 3 | IDSS-DF-3 | Yes | Yes/No | No |
| Spare Termination Box 4 | IDSS-DF-4 | Yes | Yes/No | No |
| Spare Termination Box 5 | IDSS-DF-5 | Yes | Yes/No | No |

| Table 2.6.3-4 | | |
|---|-----------|--------------------|
| Component Name | Tag No. | Component Location |
| Division B 250 Vdc Distribution Panel | IDSB-DD-1 | Auxiliary Building |
| Division C 250 Vdc Distribution Panel | IDSC-DD-2 | Auxiliary Building |
| Division D 250 Vdc Distribution Panel | IDSD-DD-1 | Auxiliary Building |
| Division A 120 Vac Distribution Panel 1 | IDSA-EA-1 | Auxiliary Building |
| Division A 120 Vac Distribution Panel 2 | IDSA-EA-2 | Auxiliary Building |
| Division B 120 Vac Distribution Panel 1 | IDSB-EA-1 | Auxiliary Building |
| Division B 120 Vac Distribution Panel 2 | IDSB-EA-2 | Auxiliary Building |
| Division B 120 Vac Distribution Panel 3 | IDSB-EA-3 | Auxiliary Building |
| Division C 120 Vac Distribution Panel 1 | IDSC-EA-1 | Auxiliary Building |
| Division C 120 Vac Distribution Panel 2 | IDSC-EA-2 | Auxiliary Building |
| Division C 120 Vac Distribution Panel 3 | IDSC-EA-3 | Auxiliary Building |
| Division D 120 Vac Distribution Panel 1 | IDSD-EA-1 | Auxiliary Building |
| Division D 120 Vac Distribution Panel 2 | IDSD-EA-2 | Auxiliary Building |
| Division A Fuse Panel 4 | IDSA-EA-4 | Auxiliary Building |
| Division B Fuse Panel 4 | IDSB-EA-4 | Auxiliary Building |
| Division B Fuse Panel 5 | IDSB-EA-5 | Auxiliary Building |
| Division B Fuse Panel 6 | IDSB-EA-6 | Auxiliary Building |
| Division C Fuse Panel 4 | IDSC-EA-4 | Auxiliary Building |
| Division C Fuse Panel 5 | IDSC-EA-5 | Auxiliary Building |
| Division C Fuse Panel 6 | IDSC-EA-6 | Auxiliary Building |
| Division D Fuse Panel 4 | IDSD-EA-4 | Auxiliary Building |
| Division A Fused Transfer Switch Box 1 | IDSA-DF-1 | Auxiliary Building |
| Division B Fused Transfer Switch Box 1 | IDSB-DF-1 | Auxiliary Building |
| Division B Fused Transfer Switch Box 2 | IDSB-DF-2 | Auxiliary Building |
| Division C Fused Transfer Switch Box 1 | IDSC-DF-1 | Auxiliary Building |
| Division C Fused Transfer Switch Box 2 | IDSC-DF-2 | Auxiliary Building |
| Division D Fused Transfer Switch Box 1 | IDSD-DF-1 | Auxiliary Building |
| Spare Fused Transfer Switch Box 1 | IDSS-DF-1 | Auxiliary Building |
| Division A 250 Vdc MCC | IDSA-DK-1 | Auxiliary Building |

| Table 2.6.3-4 | | |
|-----------------------------------|----------------|---------------------------|
| Component Name | Tag No. | Component Location |
| Division B 250 Vdc MCC | IDSB-DK-1 | Auxiliary Building |
| Division C 250 Vdc MCC | IDSC-DK-1 | Auxiliary Building |
| Division D 250 Vdc MCC | IDSD-DK-1 | Auxiliary Building |
| Division A 250 Vdc Switchboard 1 | IDSA-DS-1 | Auxiliary Building |
| Division B 250 Vdc Switchboard 1 | IDSB-DS-1 | Auxiliary Building |
| Division B 250 Vdc Switchboard 2 | IDSB-DS-2 | Auxiliary Building |
| Division C 250 Vdc Switchboard 1 | IDSC-DS-1 | Auxiliary Building |
| Division C 250 Vdc Switchboard 2 | IDSC-DS-2 | Auxiliary Building |
| Division D 250 Vdc Switchboard 1 | IDSD-DS-1 | Auxiliary Building |
| Division A Regulating Transformer | IDSA-DT-1 | Auxiliary Building |
| Division B Regulating Transformer | IDSB-DT-1 | Auxiliary Building |
| Division C Regulating Transformer | IDSC-DT-1 | Auxiliary Building |
| Division D Regulating Transformer | IDSD-DT-1 | Auxiliary Building |
| Division A 24-Hour Inverter 1 | IDSA-DU-1 | Auxiliary Building |
| Division B 24-Hour Inverter 1 | IDSB-DU-1 | Auxiliary Building |
| Division B 72-Hour Inverter 2 | IDSB-DU-2 | Auxiliary Building |
| Division C 24-Hour Inverter 1 | IDSC-DU-1 | Auxiliary Building |
| Division C 72-Hour Inverter 2 | IDSC-DU-2 | Auxiliary Building |
| Division D 24-Hour Inverter 1 | IDSD-DU-1 | Auxiliary Building |
| Spare Termination Box 2 | IDSS-DF-2 | Auxiliary Building |
| Spare Termination Box 3 | IDSS-DF-3 | Auxiliary Building |
| Spare Termination Box 4 | IDSS-DF-4 | Auxiliary Building |
| Spare Termination Box 5 | IDSS-DF-5 | Auxiliary Building |