

ATTACHMENT
1

COMED | SHIPPER NO.
 | IL 609-895
 | PKG#9964050001405

Boise Cascade Office Products
 300 W. Bryn Mawr
 Itasca, IL 60143

COMMONWEALTH EDISON CO

1400 DPUS PL
 DOWNERS GROVE, IL 60515

ATTN: ATTN: FELICIA KOERNER
 C.C.# 8053

REL# NUK OPS 8309-04

DESC OFFICE OF BWR & PWR

RTNG F. KOERNER 6306636160

INVOICE NO.
 38830904

CUSTOMER P.O. NO.
 11020501

LOCATION
 A-004-601

PRODUCT CODE
 K160-6-1

DESCRIPTION
 PAD, DESK, SMOKE, 36X20X1

QTY.	UNIT	SCS
1	EA	1 EA

8053 PKG#9964050001 02/05/01 14:45



0700

MTS

13:58 DAYDOWN

1.75 lbs

TABLE OF CONTENTS

1.0	USE AND APPLICATION	
1.1	Definitions	1.1-1
1.2	Logical Connectors	1.2-1
1.3	Completion Times	1.3-1
1.4	Frequency	1.4-1
2.0	SAFETY LIMITS (SLs)	
2.1	SLs	2.0-1
2.2	SL Violations	2.0-1
3.0	LIMITING CONDITION FOR OPERATION (LCO) APPLICABILITY . . .	3.0-1
3.0	SURVEILLANCE REQUIREMENT (SR) APPLICABILITY	3.0-4
3.1	REACTIVITY CONTROL SYSTEMS	
3.1.1	SHUTDOWN MARGIN (SDM)	3.1.1-1
3.1.2	Reactivity Anomalies	3.1.2-1
3.1.3	Control Rod OPERABILITY	3.1.3-1
3.1.4	Control Rod Scram Times	3.1.4-1
3.1.5	Control Rod Scram Accumulators	3.1.5-1
3.1.6	Rod Pattern Control	3.1.6-1
3.1.7	Standby Liquid Control (SLC) System	3.1.7-1
3.1.8	Scram Discharge Volume (SDV) Vent and Drain Valves . .	3.1.8-1
3.2	POWER DISTRIBUTION LIMITS	
3.2.1	AVERAGE PLANAR LINEAR HEAT GENERATION RATE (APLHGR) . .	3.2.1-1
3.2.2	MINIMUM CRITICAL POWER RATIO (MCPR)	3.2.2-1
3.2.3	LINEAR HEAT GENERATION RATE (LHGR)	3.2.3-1
3.2.4	Average Power Range Monitor (APRM) Gain and Setpoint .	3.2.4-1
3.3	INSTRUMENTATION	
3.3.1.1	Reactor Protection System (RPS) Instrumentation	3.3.1.1-1
3.3.1.2	Source Range Monitor (SRM) Instrumentation	3.3.1.2-1
3.3.2.1	Control Rod Block Instrumentation	3.3.2.1-1
3.3.2.2	Feedwater System and Main Turbine High Water Level Trip Instrumentation	3.3.2.2-1
3.3.3.1	Post Accident Monitoring (PAM) Instrumentation	3.3.3.1-1
3.3.4.1	Anticipated Transient Without Scram Recirculation Pump Trip (ATWS-RPT) Instrumentation	3.3.4.1-1
3.3.5.1	Emergency Core Cooling System (ECCS) Instrumentation .	3.3.5.1-1
3.3.5.2	Isolation Condenser (IC) System Instrumentation	3.3.5.2-1
3.3.6.1	Primary Containment Isolation Instrumentation	3.3.6.1-1
3.3.6.2	Secondary Containment Isolation Instrumentation	3.3.6.2-1
3.3.6.3	Relief Valve Instrumentation	3.3.6.3-1
3.3.7.1	Control Room Emergency Ventilation (CREV) System Instrumentation	3.3.7.1-1

(continued)

TABLE OF CONTENTS

3.3	INSTRUMENTATION (continued)	
3.3.8.1	Loss of Power (LOP) Instrumentation	3.3.8.1-1
3.3.8.2	Reactor Protection System (RPS) Electric Power Monitoring	3.3.8.2-1
3.4	REACTOR COOLANT SYSTEM (RCS)	
3.4.1	Recirculation Loops Operating	3.4.1-1
3.4.2	Jet Pumps	3.4.2-1
3.4.3	Safety and Relief Valves	3.4.3-1
3.4.4	RCS Operational LEAKAGE	3.4.4-1
3.4.5	RCS Leakage Detection Instrumentation	3.4.5-1
3.4.6	RCS Specific Activity	3.4.6-1
3.4.7	Shutdown Cooling (SDC) System—Hot Shutdown	3.4.7-1
3.4.8	Shutdown Cooling (SDC) System—Cold Shutdown	3.4.8-1
3.4.9	RCS Pressure and Temperature (P/T) Limits	3.4.9-1
3.4.10	Reactor Steam Dome Pressure	3.4.10-1
3.5	EMERGENCY CORE COOLING SYSTEM (ECCS) AND ISOLATION CONDENSER (IC) SYSTEM	
3.5.1	ECCS—Operating	3.5.1-1
3.5.2	ECCS—Shutdown	3.5.2-1
3.5.3	IC System	3.5.3-1
3.6	CONTAINMENT SYSTEMS	
3.6.1.1	Primary Containment	3.6.1.1-1
3.6.1.2	Primary Containment Air Lock	3.6.1.2-1
3.6.1.3	Primary Containment Isolation Valves (PCIVs)	3.6.1.3-1
3.6.1.4	Drywell Pressure	3.6.1.4-1
3.6.1.5	Drywell Air Temperature	3.6.1.5-1
3.6.1.6	Low Set Relief Valves	3.6.1.6-1
3.6.1.7	Reactor Building-to-Suppression Chamber Vacuum Breakers	3.6.1.7-1
3.6.1.8	Suppression Chamber-to-Drywell Vacuum Breakers	3.6.1.8-1
3.6.2.1	Suppression Pool Average Temperature	3.6.2.1-1
3.6.2.2	Suppression Pool Water Level	3.6.2.2-1
3.6.2.3	Suppression Pool Cooling	3.6.2.3-1
3.6.2.4	Suppression Pool Spray	3.6.2.4-1
3.6.2.5	Drywell-to-Suppression Chamber Differential Pressure	3.6.2.5-1
3.6.3.1	Primary Containment Oxygen Concentration	3.6.3.1-1
3.6.4.1	Secondary Containment	3.6.4.1-1
3.6.4.2	Secondary Containment Isolation Valves (SCIVs)	3.6.4.2-1
3.6.4.3	Standby Gas Treatment (SGT) System	3.6.4.3-1

(continued)

TABLE OF CONTENTS (continued)

3.7	PLANT SYSTEMS	
3.7.1	Containment Cooling Service Water (CCSW) System	3.7.1-1
3.7.2	Diesel Generator Cooling Water (DGCW) System	3.7.2-1
3.7.3	Ultimate Heat Sink (UHS)	3.7.3-1
3.7.4	Control Room Emergency Ventilation (CREV) System	3.7.4-1
3.7.5	Control Room Emergency Ventilation Air Conditioning (AC) System	3.7.5-1
3.7.6	Main Condenser Offgas	3.7.6-1
3.7.7	Main Turbine Bypass System	3.7.7-1
3.7.8	Spent Fuel Storage Pool Water Level	3.7.8-1
3.8	ELECTRICAL POWER SYSTEMS	
3.8.1	AC Sources—Operating	3.8.1-1
3.8.2	AC Sources—Shutdown	3.8.2-1
3.8.3	Diesel Fuel Oil and Starting Air	3.8.3-1
3.8.4	DC Sources—Operating	3.8.4-1
3.8.5	DC Sources—Shutdown	3.8.5-1
3.8.6	Battery Cell Parameters	3.8.6-1
3.8.7	Distribution Systems—Operating	3.8.7-1
3.8.8	Distribution Systems—Shutdown	3.8.8-1
3.9	REFUELING OPERATIONS	
3.9.1	Refueling Equipment Interlocks	3.9.1-1
3.9.2	Refuel Position One-Rod-Out Interlock	3.9.2-1
3.9.3	Control Rod Position	3.9.3-1
3.9.4	Control Rod Position Indication	3.9.4-1
3.9.5	Control Rod OPERABILITY—Refueling	3.9.5-1
3.9.6	Reactor Pressure Vessel (RPV) Water Level—Irradiated Fuel	3.9.6-1
3.9.7	Reactor Pressure Vessel (RPV) Water Level—New Fuel or Control Rods	3.9.7-1
3.9.8	Shutdown Cooling (SDC)—High Water Level	3.9.8-1
3.9.9	Shutdown Cooling (SDC)—Low Water Level	3.9.9-1
3.10	SPECIAL OPERATIONS	
3.10.1	Reactor Mode Switch Interlock Testing	3.10.1-1
3.10.2	Single Control Rod Withdrawal—Hot Shutdown	3.10.2-1
3.10.3	Single Control Rod Withdrawal—Cold Shutdown	3.10.3-1
3.10.4	Single Control Rod Drive (CRD) Removal—Refueling	3.10.4-1
3.10.5	Multiple Control Rod Withdrawal—Refueling	3.10.5-1
3.10.6	Control Rod Testing—Operating	3.10.6-1
3.10.7	SHUTDOWN MARGIN (SDM) Test—Refueling	3.10.7-1
4.0	DESIGN FEATURES	
4.1	Site Location	4.0-1
4.2	Reactor Core	4.0-1
4.3	Fuel Storage	4.0-2

(continued)

TABLE OF CONTENTS (continued)

5.0	ADMINISTRATIVE CONTROLS	
5.1	Responsibility	5.1-1
5.2	Organization	5.2-1
5.3	Unit Staff Qualifications	5.3-1
5.4	Procedures	5.4-1
5.5	Programs and Manuals	5.5-1
5.6	Reporting Requirements	5.6-1
5.7	High Radiation Area	5.7-1

1.0 USE AND APPLICATION

1.1 Definitions

-----NOTE-----
The defined terms of this section appear in capitalized type and are applicable throughout these Technical Specifications and Bases.

<u>Term</u>	<u>Definition</u>
ACTIONS	ACTIONS shall be that part of a Specification that prescribes Required Actions to be taken under designated Conditions within specified Completion Times.
AVERAGE PLANAR LINEAR HEAT GENERATION RATE (APLHGR)	The APLHGR shall be applicable to a specific planar height and is equal to the sum of the LHGRs for all the fuel rods in the specified bundle at the specified height divided by the number of fuel rods in the fuel bundle at the height.
CHANNEL CALIBRATION	A CHANNEL CALIBRATION shall be the adjustment, as necessary, of the channel output such that it responds within the necessary range and accuracy to known values of the parameter that the channel monitors. The CHANNEL CALIBRATION shall encompass all devices in the channel required for channel OPERABILITY and the CHANNEL FUNCTIONAL TEST. Calibration of instrument channels with resistance temperature detector (RTD) or thermocouple sensors may consist of an inplace qualitative assessment of sensor behavior and normal calibration of the remaining adjustable devices in the channel. The CHANNEL CALIBRATION may be performed by means of any series of sequential, overlapping, or total channel steps.
CHANNEL CHECK	A CHANNEL CHECK shall be the qualitative assessment, by observation, of channel behavior during operation. This determination shall include, where possible, comparison of the channel indication and status to other indications or status derived from independent instrument channels measuring the same parameter.

(continued)

1.1 Definitions (continued)

CHANNEL FUNCTIONAL TEST	A CHANNEL FUNCTIONAL TEST shall be the injection of a simulated or actual signal into the channel as close to the sensor as practicable to verify OPERABILITY of all devices in the channel required for channel OPERABILITY. The CHANNEL FUNCTIONAL TEST may be performed by means of any series of sequential, overlapping, or total channel steps.
CORE ALTERATION	<p>CORE ALTERATION shall be the movement of any fuel, sources, or reactivity control components, within the reactor vessel with the vessel head removed and fuel in the vessel. The following exceptions are not considered to be CORE ALTERATIONS:</p> <ul style="list-style-type: none">a. Movement of source range monitors, local power range monitors, intermediate range monitors, traversing incore probes, or special movable detectors (including undervessel replacement); andb. Control rod movement, provided there are no fuel assemblies in the associated core cell. <p>Suspension of CORE ALTERATIONS shall not preclude completion of movement of a component to a safe position.</p>
CORE OPERATING LIMITS REPORT (COLR)	The COLR is the unit specific document that provides cycle specific parameter limits for the current reload cycle. These cycle specific limits shall be determined for each reload cycle in accordance with Specification 5.6.5. Plant operation within these limits is addressed in individual Specifications.
DOSE EQUIVALENT I-131	DOSE EQUIVALENT I-131 shall be that concentration of I-131 (microcuries/gram) that alone would produce the same thyroid dose as the quantity and isotopic mixture of I-131, I-132, I-133, I-134, and I-135 actually present. The thyroid dose

(continued)

1.1 Definitions

DOSE EQUIVALENT I-131 (continued)

conversion factors used for this calculation shall be those listed in Table III of TID-14844, AEC, 1962, "Calculation of Distance Factors for Power and Test Reactor Sites;" Table E-7 of Regulatory Guide 1.109, Rev. 1, NRC, 1977; or ICRP 30, Supplement to Part 1, pages 192-212, Table titled, "Committed Dose Equivalent in Target Organs or Tissues per Intake of Unit Activity."

FUEL DESIGN LIMITING RATIO FOR CENTERLINE MELT (FDLRC)

The FDLRC shall be 1.2 times the LHGR existing at a given location divided by the product of the transient LHGR limit and the fraction of RTP.

LEAKAGE

LEAKAGE shall be:

a. Identified LEAKAGE

1. LEAKAGE into the drywell, such as that from pump seals or valve packing, that is captured and conducted to a sump or collecting tank; or
2. LEAKAGE into the drywell atmosphere from sources that are both specifically located and known either not to interfere with the operation of leakage detection systems or not to be pressure boundary LEAKAGE;

b. Unidentified LEAKAGE

All LEAKAGE into the drywell that is not identified LEAKAGE;

c. Total LEAKAGE

Sum of the identified and unidentified LEAKAGE; and

d. Pressure Boundary LEAKAGE

LEAKAGE through a nonisolable fault in a Reactor Coolant System (RCS) component body, pipe wall, or vessel wall.

(continued)

1.1 Definitions (continued)

LINEAR HEAT GENERATION RATE (LHGR)	The LHGR shall be the heat generation rate per unit length of fuel rod. It is the integral of the heat flux over the heat transfer area associated with the unit length.
LOGIC SYSTEM FUNCTIONAL TEST	A LOGIC SYSTEM FUNCTIONAL TEST shall be a test of all logic components required for OPERABILITY of a logic circuit, from as close to the sensor as practicable up to, but not including, the actuated device, to verify OPERABILITY. The LOGIC SYSTEM FUNCTIONAL TEST may be performed by means of any series of sequential, overlapping, or total system steps so that the entire logic system is tested.
MINIMUM CRITICAL POWER RATIO (MCPR)	The MCPR shall be the smallest critical power ratio (CPR) that exists in the core for each class of fuel. The CPR is that power in the assembly that is calculated by application of the appropriate correlation(s) to cause some point in the assembly to experience boiling transition, divided by the actual assembly operating power.
MODE	A MODE shall correspond to any one inclusive combination of mode switch position, average reactor coolant temperature, and reactor vessel head closure bolt tensioning specified in Table 1.1-1 with fuel in the reactor vessel.
OPERABLE - OPERABILITY	A system, subsystem, division, component, or device shall be OPERABLE or have OPERABILITY when it is capable of performing its specified safety function(s) and when all necessary attendant instrumentation, controls, normal or emergency electrical power, cooling and seal water, lubrication, and other auxiliary equipment that are required for the system, subsystem, division, component, or device to perform its specified safety function(s) are also capable of performing their related support function(s).
RATED THERMAL POWER (RTP)	RTP shall be a total reactor core heat transfer rate to the reactor coolant of 2527 MWt.

(continued)

1.1 Definitions (continued)

REACTOR PROTECTION SYSTEM (RPS) RESPONSE TIME	<p>The RPS RESPONSE TIME shall be that time interval from the opening of the sensor contact until the opening of the trip actuator. The response time may be measured by means of any series of sequential, overlapping, or total steps so that the entire response time is measured.</p>
SHUTDOWN MARGIN (SDM)	<p>SDM shall be the amount of reactivity by which the reactor is subcritical or would be subcritical assuming that:</p> <ol style="list-style-type: none">The reactor is xenon free;The moderator temperature is 68°F; andAll control rods are fully inserted except for the single control rod of highest reactivity worth, which is assumed to be fully withdrawn. <p>With control rods not capable of being fully inserted, the reactivity worth of these control rods must be accounted for in the determination of SDM.</p>
STAGGERED TEST BASIS	<p>A STAGGERED TEST BASIS shall consist of the testing of one of the systems, subsystems, channels, or other designated components during the interval specified by the Surveillance Frequency, so that all systems, subsystems, channels, or other designated components are tested during n Surveillance Frequency intervals, where n is the total number of systems, subsystems, channels, or other designated components in the associated function.</p>
THERMAL POWER	<p>THERMAL POWER shall be the total reactor core heat transfer rate to the reactor coolant.</p>
TURBINE BYPASS SYSTEM RESPONSE TIME	<p>The TURBINE BYPASS SYSTEM RESPONSE TIME shall be that time interval from when the turbine bypass control unit generates a turbine bypass valve flow signal until the turbine bypass valves travel to their required positions. The response time may be measured by means of any series of sequential, overlapping, or total steps so that the entire response time is measured.</p>

Table 1.1-1 (page 1 of 1)
MODES

MODE	TITLE	REACTOR MODE SWITCH POSITION	AVERAGE REACTOR COOLANT TEMPERATURE (°F)
1	Power Operation	Run	NA
2	Startup	Refuel ^(a) or Startup/Hot Standby	NA
3	Hot Shutdown ^(a)	Shutdown	> 212
4	Cold Shutdown ^(a)	Shutdown	≤ 212
5	Refueling ^(b)	Shutdown or Refuel	NA

(a) All reactor vessel head closure bolts fully tensioned.

(b) One or more reactor vessel head closure bolts less than fully tensioned.

1.0 USE AND APPLICATION

1.2 Logical Connectors

PURPOSE	<p>The purpose of this section is to explain the meaning of logical connectors.</p> <p>Logical connectors are used in Technical Specifications (TS) to discriminate between, and yet connect, discrete Conditions, Required Actions, Completion Times, Surveillances, and Frequencies. The only logical connectors that appear in TS are <u>AND</u> and <u>OR</u>. The physical arrangement of these connectors constitutes logical conventions with specific meanings.</p>
BACKGROUND	<p>Several levels of logic may be used to state Required Actions. These levels are identified by the placement (or nesting) of the logical connectors and by the number assigned to each Required Action. The first level of logic is identified by the first digit of the number assigned to a Required Action and the placement of the logical connector in the first level of nesting (i.e., left justified with the number of the Required Action). The successive levels of logic are identified by additional digits of the Required Action number and by successive indentions of the logical connectors.</p> <p>When logical connectors are used to state a Condition, Completion Time, Surveillance, or Frequency, only the first level of logic is used, and the logical connector is left justified with the statement of the Condition, Completion Time, Surveillance, or Frequency.</p>
EXAMPLES	<p>The following examples illustrate the use of logical connectors.</p>

(continued)

1.2 Logical Connectors

EXAMPLES
(continued)

EXAMPLE 1.2-1

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. LCO not met.	A.1 Verify . . . <u>AND</u> A.2 Restore . . .	

In this example the logical connector AND is used to indicate that, when in Condition A, both Required Actions A.1 and A.2 must be completed.

(continued)

1.2 Logical Connectors

EXAMPLES
(continued)

EXAMPLE 1.2-2

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. LCO not met.	A.1 Trip . . .	
	<u>OR</u>	
	A.2.1 Verify . . .	
	<u>AND</u>	
	A.2.2.1 Reduce . . .	
	<u>OR</u>	
	A.2.2.2 Perform . . .	
	<u>OR</u>	
	A.3 Align . . .	

This example represents a more complicated use of logical connectors. Required Actions A.1, A.2, and A.3 are alternative choices, only one of which must be performed as indicated by the use of the logical connector OR and the left justified placement. Any one of these three Actions may be chosen. If A.2 is chosen, then both A.2.1 and A.2.2 must be performed as indicated by the logical connector AND. Required Action A.2.2 is met by performing A.2.2.1 or A.2.2.2. The indented position of the logical connector OR indicates that A.2.2.1 and A.2.2.2 are alternative choices, only one of which must be performed.

1.0 USE AND APPLICATION

1.3 Completion Times

PURPOSE	The purpose of this section is to establish the Completion Time convention and to provide guidance for its use.
---------	---

BACKGROUND	Limiting Conditions for Operation (LCOs) specify minimum requirements for ensuring safe operation of the unit. The ACTIONS associated with an LCO state Conditions that typically describe the ways in which the requirements of the LCO can fail to be met. Specified with each stated Condition are Required Action(s) and Completion Time(s).
------------	--

DESCRIPTION	<p>The Completion Time is the amount of time allowed for completing a Required Action. It is referenced to the time of discovery of a situation (e.g., inoperable equipment or variable not within limits) that requires entering an ACTIONS Condition unless otherwise specified, providing the unit is in a MODE or specified condition stated in the Applicability of the LCO. Required Actions must be completed prior to the expiration of the specified Completion Time. An ACTIONS Condition remains in effect and the Required Actions apply until the Condition no longer exists or the unit is not within the LCO Applicability.</p> <p>If situations are discovered that require entry into more than one Condition at a time within a single LCO (multiple Conditions), the Required Actions for each Condition must be performed within the associated Completion Time. When in multiple Conditions, separate Completion Times are tracked for each Condition starting from the time of discovery of the situation that required entry into the Condition.</p> <p>Once a Condition has been entered, subsequent divisions, subsystems, components, or variables expressed in the Condition, discovered to be inoperable or not within limits, will <u>not</u> result in separate entry into the Condition unless specifically stated. The Required Actions of the Condition continue to apply to each additional failure, with Completion Times based on initial entry into the Condition.</p>
-------------	---

(continued)

1.3 Completion Times

DESCRIPTION (continued) However, when a subsequent division, subsystem, component, or variable expressed in the Condition is discovered to be inoperable or not within limits, the Completion Time(s) may be extended. To apply this Completion Time extension, two criteria must first be met. The subsequent inoperability:

- a. Must exist concurrent with the first inoperability;
 and
- b. Must remain inoperable or not within limits after the first inoperability is resolved.

The total Completion Time allowed for completing a Required Action to address the subsequent inoperability shall be limited to the more restrictive of either:

- a. The stated Completion Time, as measured from the initial entry into the Condition, plus an additional 24 hours; or
- b. The stated Completion Time as measured from discovery of the subsequent inoperability.

The above Completion Time extension does not apply to those Specifications that have exceptions that allow completely separate re-entry into the Condition (for each division, subsystem, component or variable expressed in the Condition) and separate tracking of Completion Times based on this re-entry. These exceptions are stated in individual Specifications.

The above Completion Time extension does not apply to a Completion Time with a modified "time zero." This modified "time zero" may be expressed as a repetitive time (i.e., "once per 8 hours," where the Completion Time is referenced from a previous completion of the Required Action versus the time of Condition entry) or as a time modified by the phrase "from discovery . . ." Example 1.3-3 illustrates one use of this type of Completion Time. The 10 day Completion Time specified for Condition A and B in Example 1.3-3 may not be extended.

EXAMPLES The following examples illustrate the use of Completion Times with different types of Conditions and changing Conditions.

(continued)

1.3 Completion Times

EXAMPLES
(continued)

EXAMPLE 1.3-1

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
B. Required Action and associated Completion Time not met.	B.1 Be in MODE 3.	12 hours
	<u>AND</u> B.2 Be in MODE 4.	36 hours

Condition B has two Required Actions. Each Required Action has its own separate Completion Time. Each Completion Time is referenced to the time that Condition B is entered.

The Required Actions of Condition B are to be in MODE 3 within 12 hours AND in MODE 4 within 36 hours. A total of 12 hours is allowed for reaching MODE 3 and a total of 36 hours (not 48 hours) is allowed for reaching MODE 4 from the time that Condition B was entered. If MODE 3 is reached within 6 hours, the time allowed for reaching MODE 4 is the next 30 hours because the total time allowed for reaching MODE 4 is 36 hours.

If Condition B is entered while in MODE 3, the time allowed for reaching MODE 4 is the next 36 hours.

(continued)

1.3 Completion Times

EXAMPLES
(continued)

EXAMPLE 1.3-2

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One pump inoperable.	A.1 Restore pump to OPERABLE status.	7 days
B. Required Action and associated Completion Time not met.	B.1 Be in MODE 3.	12 hours
	<u>AND</u> B.2 Be in MODE 4.	36 hours

When a pump is declared inoperable, Condition A is entered. If the pump is not restored to OPERABLE status within 7 days, Condition B is also entered and the Completion Time clocks for Required Actions B.1 and B.2 start. If the inoperable pump is restored to OPERABLE status after Condition B is entered, Conditions A and B are exited, and therefore, the Required Actions of Condition B may be terminated.

When a second pump is declared inoperable while the first pump is still inoperable, Condition A is not re-entered for the second pump. LCO 3.0.3 is entered, since the ACTIONS do not include a Condition for more than one inoperable pump. The Completion Time clock for Condition A does not stop after LCO 3.0.3 is entered, but continues to be tracked from the time Condition A was initially entered.

While in LCO 3.0.3, if one of the inoperable pumps is restored to OPERABLE status and the Completion Time for Condition A has not expired, LCO 3.0.3 may be exited and operation continued in accordance with Condition A.

(continued)

1.3 Completion Times

EXAMPLES

EXAMPLE 1.3-2 (continued)

While in LCO 3.0.3, if one of the inoperable pumps is restored to OPERABLE status and the Completion Time for Condition A has expired, LCO 3.0.3 may be exited and operation continued in accordance with Condition B. The Completion Time for Condition B is tracked from the time the Condition A Completion Time expired.

On restoring one of the pumps to OPERABLE status, the Condition A Completion Time is not reset, but continues from the time the first pump was declared inoperable. This Completion Time may be extended if the pump restored to OPERABLE status was the first inoperable pump. A 24 hour extension to the stated 7 days is allowed, provided this does not result in the second pump being inoperable for > 7 days.

(continued)

1.3 Completion Times

EXAMPLES
(continued)

EXAMPLE 1.3-3

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One Function X subsystem inoperable.	A.1 Restore Function X subsystem to OPERABLE status.	7 days <u>AND</u> 10 days from discovery of failure to meet the LCO
B. One Function Y subsystem inoperable.	B.1 Restore Function Y subsystem to OPERABLE status.	72 hours <u>AND</u> 10 days from discovery of failure to meet the LCO
C. One Function X subsystem inoperable. <u>AND</u> One Function Y subsystem inoperable.	C.1 Restore Function X subsystem to OPERABLE status. <u>OR</u> C.2 Restore Function Y subsystem to OPERABLE status.	72 hours 72 hours

(continued)

1.3 Completion Times

EXAMPLES

EXAMPLE 1.3-3 (continued)

When one Function X subsystem and one Function Y subsystem are inoperable, Condition A and Condition B are concurrently applicable. The Completion Times for Condition A and Condition B are tracked separately for each subsystem, starting from the time each subsystem was declared inoperable and the Condition was entered. A separate Completion Time is established for Condition C and tracked from the time the second subsystem was declared inoperable (i.e., the time the situation described in Condition C was discovered).

If Required Action C.2 is completed within the specified Completion Time, Conditions B and C are exited. If the Completion Time for Required Action A.1 has not expired, operation may continue in accordance with Condition A. The remaining Completion Time in Condition A is measured from the time the affected subsystem was declared inoperable (i.e., initial entry into Condition A).

The Completion Times of Conditions A and B are modified by a logical connector, with a separate 10 day Completion Time measured from the time it was discovered the LCO was not met. In this example, without the separate Completion Time, it would be possible to alternate between Conditions A, B, and C in such a manner that operation could continue indefinitely without ever restoring systems to meet the LCO. The separate Completion Time modified by the phrase "from discovery of failure to meet the LCO" is designed to prevent indefinite continued operation while not meeting the LCO. This Completion Time allows for an exception to the normal "time zero" for beginning the Completion Time "clock". In this instance, the Completion Time "time zero" is specified as commencing at the time the LCO was initially not met, instead of at the time the associated Condition was entered.

(continued)

1.3 Completion Times

EXAMPLES (continued)

EXAMPLE 1.3-4

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One or more valves inoperable.	A.1 Restore valve(s) to OPERABLE status.	4 hours
B. Required Action and associated Completion Time not met.	B.1 Be in MODE 3.	12 hours
	<u>AND</u> B.2 Be in MODE 4.	36 hours

A single Completion Time is used for any number of valves inoperable at the same time. The Completion Time associated with Condition A is based on the initial entry into Condition A and is not tracked on a per valve basis. Declaring subsequent valves inoperable, while Condition A is still in effect, does not trigger the tracking of separate Completion Times.

Once one of the valves has been restored to OPERABLE status, the Condition A Completion Time is not reset, but continues from the time the first valve was declared inoperable. The Completion Time may be extended if the valve restored to OPERABLE status was the first inoperable valve. The Condition A Completion Time may be extended for up to 4 hours provided this does not result in any subsequent valve being inoperable for > 4 hours.

If the Completion Time of 4 hours (plus the extension) expires while one or more valves are still inoperable, Condition B is entered.

(continued)

1.3 Completion Times

EXAMPLE
(continued)

EXAMPLE 1.3-5

ACTIONS

-----NOTE-----
Separate Condition entry is allowed for each inoperable valve.

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One or more valves inoperable.	A.1 Restore valve to OPERABLE status.	4 hours
B. Required Action and associated Completion Time not met.	B.1 Be in MODE 3.	12 hours
	<u>AND</u> B.2 Be in MODE 4.	36 hours

The Note above the ACTIONS Table is a method of modifying how the Completion Time is tracked. If this method of modifying how the Completion Time is tracked was applicable only to a specific Condition, the Note would appear in that Condition rather than at the top of the ACTIONS Table.

The Note allows Condition A to be entered separately for each inoperable valve, and Completion Times tracked on a per valve basis. When a valve is declared inoperable, Condition A is entered and its Completion Time starts. If subsequent valves are declared inoperable, Condition A is entered for each valve and separate Completion Times start and are tracked for each valve.

(continued)

1.3 Completion Times

EXAMPLES

EXAMPLE 1.3-5 (continued)

If the Completion Time associated with a valve in Condition A expires, Condition B is entered for that valve. If the Completion Times associated with subsequent valves in Condition A expire, Condition B is entered separately for each valve and separate Completion Times start and are tracked for each valve. If a valve that caused entry into Condition B is restored to OPERABLE status, Condition B is exited for that valve.

Since the Note in this example allows multiple Condition entry and tracking of separate Completion Times, Completion Time extensions do not apply.

EXAMPLE 1.3-6

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One channel inoperable.	A.1 Perform SR 3.x.x.x.	Once per 8 hours
	<u>OR</u> A.2 Reduce THERMAL POWER to \leq 50% RTP.	8 hours
B. Required Action and associated Completion Time not met.	B.1 Be in MODE 3.	12 hours

(continued)

1.3 Completion Times

EXAMPLES

EXAMPLE 1.3-6 (continued)

Entry into Condition A offers a choice between Required Action A.1 or A.2. Required Action A.1 has a "once per" Completion Time, which qualifies for the 25% extension, per SR 3.0.2, to each performance after the initial performance. The initial 8 hour interval of Required Action A.1 begins when Condition A is entered and the initial performance of Required Action A.1 must be completed within the first 8 hour interval. If Required Action A.1 is followed and the Required Action is not met within the Completion Time (plus the extension allowed by SR 3.0.2), Condition B is entered. If Required Action A.2 is followed and the Completion Time of 8 hours is not met, Condition B is entered.

If after entry into Condition B, Required Action A.1 or A.2 is met, Condition B is exited and operation may then continue in Condition A.

(continued)

1.3 Completion Times

EXAMPLES
(continued)

EXAMPLE 1.3-7

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One subsystem inoperable.	A.1 Verify affected subsystem isolated.	1 hour <u>AND</u> Once per 8 hours thereafter
	<u>AND</u> A.2 Restore subsystem to OPERABLE status.	72 hours
B. Required Action and associated Completion Time not met.	B.1 Be in MODE 3.	12 hours
	<u>AND</u> B.2 Be in MODE 4.	36 hours

Required Action A.1 has two Completion Times. The 1 hour Completion Time begins at the time the Condition is entered and each "Once per 8 hours thereafter" interval begins upon performance of Required Action A.1.

If after Condition A is entered, Required Action A.1 is not met within either the initial 1 hour or any subsequent 8 hour interval from the previous performance (plus the extension allowed by SR 3.0.2), Condition B is entered. The Completion Time clock for Condition A does not stop after Condition B is entered, but continues from the time Condition A was initially entered. If Required Action A.1

(continued)

1.3 Completion Times

EXAMPLES

EXAMPLE 1.3-7 (continued)

is met after Condition B is entered, Condition B is exited and operation may continue in accordance with Condition A, provided the Completion Time for Required Action A.2 has not expired.

IMMEDIATE COMPLETION TIME

When "Immediately" is used as a Completion Time, the Required Action should be pursued without delay and in a controlled manner.

1.0 USE AND APPLICATION

1.4 Frequency

PURPOSE	The purpose of this section is to define the proper use and application of Frequency requirements.
---------	--

DESCRIPTION	<p>Each Surveillance Requirement (SR) has a specified Frequency in which the Surveillance must be met in order to meet the associated Limiting Condition for Operation (LCO). An understanding of the correct application of the specified Frequency is necessary for compliance with the SR.</p> <p>The "specified Frequency" is referred to throughout this section and each of the Specifications of Section 3.0, Surveillance Requirement (SR) Applicability. The "specified Frequency" consists of the requirements of the Frequency column of each SR, as well as certain Notes in the Surveillance column that modify performance requirements.</p> <p>Sometimes special situations dictate when the requirements of a Surveillance are to be met. They are "otherwise stated" conditions allowed by SR 3.0.1. They may be stated as clarifying Notes in the Surveillance, as part of the Surveillance, or both. Example 1.4-4 discusses these special situations.</p> <p>Situations where a Surveillance could be required (i.e., its Frequency could expire), but where it is not possible or not desired that it be performed until sometime after the associated LCO is within its Applicability, represent potential SR 3.0.4 conflicts. To avoid these conflicts, the SR (i.e., the Surveillance or the Frequency) is stated such that it is only "required" when it can be and should be performed. With an SR satisfied, SR 3.0.4 imposes no restriction.</p> <p>The use of "met" or "performed" in these instances conveys specific meanings. A Surveillance is "met" only when the acceptance criteria are satisfied. Known failure of the requirements of a Surveillance, even without a Surveillance specifically being "performed," constitutes a Surveillance not "met." "Performance" refers only to the requirement to specifically determine the ability to meet the acceptance criteria. SR 3.0.4 restrictions would not apply if both the following conditions are satisfied:</p>
-------------	---

(continued)

1.4 Frequency

DESCRIPTION (continued)	<p>a. The Surveillance is not required to be performed; and</p> <p>b. The Surveillance is not required to be met or, even if required to be met, is not known to be failed.</p>
----------------------------	---

EXAMPLES The following examples illustrate the various ways that Frequencies are specified. In these examples, the Applicability of the LCO (LCO not shown) is MODES 1, 2, and 3.

EXAMPLE 1.4-1

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
Perform CHANNEL CHECK.	12 hours

Example 1.4-1 contains the type of SR most often encountered in the Technical Specifications (TS). The Frequency specifies an interval (12 hours) during which the associated Surveillance must be performed at least one time. Performance of the Surveillance initiates the subsequent interval. Although the Frequency is stated as 12 hours, an extension of the time interval to 1.25 times the interval specified in the Frequency is allowed by SR 3.0.2 for operational flexibility. The measurement of this interval continues at all times, even when the SR is not required to be met per SR 3.0.1 (such as when the equipment is inoperable, a variable is outside specified limits, or the unit is outside the Applicability of the LCO). If the interval specified by SR 3.0.2 is exceeded while the unit is in a MODE or other specified condition in the Applicability of the LCO, and the performance of the Surveillance is not otherwise modified (refer to Examples 1.4-3 and 1.4-4), then SR 3.0.3 becomes applicable.

If the interval as specified by SR 3.0.2 is exceeded while the unit is not in a MODE or other specified condition in the Applicability of the LCO for which performance of the SR

(continued)

1.4 Frequency

EXAMPLES

EXAMPLE 1.4-1 (continued)

is required, the Surveillance must be performed within the Frequency requirements of SR 3.0.2 prior to entry into the MODE or other specified condition. Failure to do so would result in a violation of SR 3.0.4.

EXAMPLE 1.4-2

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
Verify flow is within limits.	Once within 12 hours after ≥ 25% RTP <u>AND</u> 24 hours thereafter

Example 1.4-2 has two Frequencies. The first is a one time performance Frequency, and the second is of the type shown in Example 1.4-1. The logical connector "AND" indicates that both Frequency requirements must be met. Each time reactor power is increased from a power level < 25% RTP to ≥ 25% RTP, the Surveillance must be performed within 12 hours.

The use of "once" indicates a single performance will satisfy the specified Frequency (assuming no other Frequencies are connected by "AND"). This type of Frequency does not qualify for the extension allowed by SR 3.0.2.

"Thereafter" indicates future performances must be established per SR 3.0.2, but only after a specified condition is first met (i.e., the "once" performance in this example). If reactor power decreases to < 25% RTP, the measurement of both intervals stops. New intervals start upon reactor power reaching 25% RTP.

(continued)

1.4 Frequency

EXAMPLES (continued)

EXAMPLE 1.4-3

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
<p>-----NOTE----- Not required to be performed until 12 hours after $\geq 25\%$ RTP. -----</p> <p>Perform channel adjustment.</p>	7 days

The interval continues whether or not the unit operation is $< 25\%$ RTP between performances.

As the Note modifies the required performance of the Surveillance, it is construed to be part of the "specified Frequency." Should the 7 day interval be exceeded while operation is $< 25\%$ RTP, this Note allows 12 hours after power reaches $\geq 25\%$ RTP to perform the Surveillance. The Surveillance is still considered to be within the "specified Frequency." Therefore, if the Surveillance were not performed within the 7 day interval (plus the extension allowed by SR 3.0.2), but operation was $< 25\%$ RTP, it would not constitute a failure of the SR or failure to meet the LCO. Also, no violation of SR 3.0.4 occurs when changing MODES, even with the 7 day Frequency not met, provided operation does not exceed 12 hours with power $\geq 25\%$ RTP.

Once the unit reaches 25% RTP, 12 hours would be allowed for completing the Surveillance. If the Surveillance were not performed within this 12 hour interval, there would then be a failure to perform a Surveillance within the specified Frequency, and the provisions of SR 3.0.3 would apply.

(continued)

1.4 Frequency

EXAMPLES (continued)

EXAMPLE 1.4-4

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
<p>-----NOTE----- Only required to be met in MODE 1. -----</p> <p>Verify leakage rates are within limits.</p>	24 hours

Example 1.4-4 specifies that the requirements of this Surveillance do not have to be met until the unit is in MODE 1. The interval measurement for the Frequency of this Surveillance continues at all times, as described in Example 1.4-1. However, the Note constitutes an "otherwise stated" exception to the Applicability of this Surveillance. Therefore, if the Surveillance were not performed within the 24 hour interval (plus the extension allowed by SR 3.0.2), but the unit was not in MODE 1, there would be no failure of the SR nor failure to meet the LCO. Therefore, no violation of SR 3.0.4 occurs when changing MODES, even with the 24 hour Frequency exceeded, provided the MODE change was not made into MODE 1. Prior to entering MODE 1 (assuming again that the 24 hour Frequency were not met), SR 3.0.4 would require satisfying the SR.

2.0 SAFETY LIMITS (SLs)

2.1 SLs

2.1.1 Reactor Core SLs

- 2.1.1.1 With the reactor steam dome pressure < 785 psig or core flow $< 10\%$ rated core flow:

THERMAL POWER shall be $\leq 25\%$ RTP.

- 2.1.1.2 With the reactor steam dome pressure ≥ 785 psig and core flow $\geq 10\%$ rated core flow:

For Unit 2 two recirculation loop operation, MCPR shall be ≥ 1.09 for cycle exposures $\leq 13,800$ MWd/MTU, and ≥ 1.12 for cycle exposures $> 13,800$ MWd/MTU, or for Unit 2 single recirculation loop operation, MCPR shall be ≥ 1.10 for cycle exposures $\leq 13,800$ MWd/MTU and ≥ 1.13 for cycle exposures $> 13,800$ MWd/MTU.

For Unit 3 two recirculation loop operation, MCPR shall be ≥ 1.10 , or for single recirculation loop operation, MCPR shall be ≥ 1.11 .

- 2.1.1.3 Reactor vessel water level shall be greater than the top of active irradiated fuel.

2.1.2 Reactor Coolant System Pressure SL

Reactor steam dome pressure shall be ≤ 1345 psig.

2.2 SL Violations

With any SL violation, the following actions shall be completed within 2 hours:

- 2.2.1 Restore compliance with all SLs; and

- 2.2.2 Insert all insertable control rods.
-

3.0 LIMITING CONDITION FOR OPERATION (LCO) APPLICABILITY

-
- | | |
|-----------|---|
| LCO 3.0.1 | LCOs shall be met during the MODES or other specified conditions in the Applicability, except as provided in LCO 3.0.2 and LCO 3.0.7. |
|-----------|---|
-
- | | |
|-----------|---|
| LCO 3.0.2 | <p>Upon discovery of a failure to meet an LCO, the Required Actions of the associated Conditions shall be met, except as provided in LCO 3.0.5 and LCO 3.0.6.</p> <p>If the LCO is met or is no longer applicable prior to expiration of the specified Completion Time(s), completion of the Required Action(s) is not required, unless otherwise stated.</p> |
|-----------|---|
-
- | | |
|-----------|---|
| LCO 3.0.3 | <p>When an LCO is not met and the associated ACTIONS are not met, an associated ACTION is not provided, or if directed by the associated ACTIONS, the unit shall be placed in a MODE or other specified condition in which the LCO is not applicable. Action shall be initiated within 1 hour to place the unit, as applicable, in:</p> <ul style="list-style-type: none">a. MODE 3 within 13 hours; andb. MODE 4 within 37 hours. <p>Exceptions to this Specification are stated in the individual Specifications.</p> <p>Where corrective measures are completed that permit operation in accordance with the LCO or ACTIONS, completion of the actions required by LCO 3.0.3 is not required.</p> <p>LCO 3.0.3 is only applicable in MODES 1, 2, and 3.</p> |
|-----------|---|
-
- | | |
|-----------|--|
| LCO 3.0.4 | When an LCO is not met, entry into a MODE or other specified condition in the Applicability shall not be made except when the associated ACTIONS to be entered permit continued operation in the MODE or other specified condition in the Applicability for an unlimited period of time. This Specification shall not prevent changes in MODES or other specified conditions in the Applicability that are required to comply with ACTIONS or that are part of a shutdown of the unit. |
|-----------|--|

(continued)

3.0 LCO APPLICABILITY

-
- | | |
|--------------------------|---|
| LCO 3.0.4
(continued) | Exceptions to this Specification are stated in the individual Specifications.

LCO 3.0.4 is only applicable for entry into a MODE or other specified condition in the Applicability in MODES 1, 2, and 3. |
|--------------------------|---|
-
- | | |
|-----------|---|
| LCO 3.0.5 | Equipment removed from service or declared inoperable to comply with ACTIONS may be returned to service under administrative control solely to perform testing required to demonstrate its OPERABILITY or the OPERABILITY of other equipment. This is an exception to LCO 3.0.2 for the system returned to service under administrative control to perform the testing required to demonstrate OPERABILITY. |
|-----------|---|
-
- | | |
|-----------|--|
| LCO 3.0.6 | <p>When a supported system LCO is not met solely due to a support system LCO not being met, the Conditions and Required Actions associated with this supported system are not required to be entered. Only the support system LCO ACTIONS are required to be entered. This is an exception to LCO 3.0.2 for the supported system. In this event, an evaluation shall be performed in accordance with Specification 5.5.11, "Safety Function Determination Program (SFDP)." If a loss of safety function is determined to exist by this program, the appropriate Conditions and Required Actions of the LCO in which the loss of safety function exists are required to be entered.</p> <p>When a support system's Required Action directs a supported system to be declared inoperable or directs entry into Conditions and Required Actions for a supported system, the applicable Conditions and Required Actions shall be entered in accordance with LCO 3.0.2.</p> |
|-----------|--|
-
- | | |
|-----------|---|
| LCO 3.0.7 | Special Operations LCOs in Section 3.10 allow specified Technical Specifications (TS) requirements to be changed to permit performance of special tests and operations. Unless otherwise specified, all other TS requirements remain unchanged. Compliance with Special Operations LCOs is optional. When a Special Operations LCO is desired to be met but is not met, the ACTIONS of the Special Operations |
|-----------|---|

(continued)

3.0 LCO APPLICABILITY

LCO 3.0.7
(continued) LCO shall be met. When a Special Operations LCO is not desired to be met, entry into a MODE or other specified condition in the Applicability shall only be made in accordance with the other applicable Specifications.

LCO 3.0.8 LCOs, including associated ACTIONS, shall apply to each unit individually, unless otherwise indicated. Whenever the LCO refers to a system or component that is shared by both units, the ACTIONS will apply to both units simultaneously.

3.0 SURVEILLANCE REQUIREMENT (SR) APPLICABILITY

SR 3.0.1 SRs shall be met during the MODES or other specified conditions in the Applicability for individual LCOs, unless otherwise stated in the SR. Failure to meet a Surveillance, whether such failure is experienced during the performance of the Surveillance or between performances of the Surveillance, shall be failure to meet the LCO. Failure to perform a Surveillance within the specified Frequency shall be failure to meet the LCO except as provided in SR 3.0.3. Surveillances do not have to be performed on inoperable equipment or variables outside specified limits.

SR 3.0.2 The specified Frequency for each SR is met if the Surveillance is performed within 1.25 times the interval specified in the Frequency, as measured from the previous performance or as measured from the time a specified condition of the Frequency is met.

For Frequencies specified as "once," the above interval extension does not apply.

If a Completion Time requires periodic performance on a "once per . . ." basis, the above Frequency extension applies to each performance after the initial performance.

Exceptions to this Specification are stated in the individual Specifications.

SR 3.0.3 If it is discovered that a Surveillance was not performed within its specified Frequency, then compliance with the requirement to declare the LCO not met may be delayed, from the time of discovery, up to 24 hours or up to the limit of the specified Frequency, whichever is less. This delay period is permitted to allow performance of the Surveillance.

If the Surveillance is not performed within the delay period, the LCO must immediately be declared not met, and the applicable Condition(s) must be entered.

When the Surveillance is performed within the delay period and the Surveillance is not met, the LCO must immediately be declared not met, and the applicable Condition(s) must be entered.

(continued)

3.0 SR APPLICABILITY (continued)

SR 3.0.4 Entry into a MODE or other specified condition in the Applicability of an LCO shall not be made unless the LCO's Surveillances have been met within their specified Frequency. This provision shall not prevent entry into MODES or other specified conditions in the Applicability that are required to comply with Actions or that are part of a shutdown of the unit.

SR 3.0.4 is only applicable for entry into a MODE or other specified condition in the Applicability in MODES 1, 2, and 3.

SR 3.0.5 SRs shall apply to each unit individually, unless otherwise indicated.

3.1 REACTIVITY CONTROL SYSTEMS

3.1.1 SHUTDOWN MARGIN (SDM)

LC0 3.1.1 SDM shall be:

- a. $\geq 0.38\% \Delta k/k$, with the highest worth control rod analytically determined; or
- b. $\geq 0.28\% \Delta k/k$, with the highest worth control rod determined by test.

APPLICABILITY: MODES 1, 2, 3, 4, and 5.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. SDM not within limits in MODE 1 or 2.	A.1 Restore SDM to within limits.	6 hours
B. Required Action and associated Completion Time of Condition A not met.	B.1 Be in MODE 3.	12 hours
C. SDM not within limits in MODE 3.	C.1 Initiate action to fully insert all insertable control rods.	Immediately
D. SDM not within limits in MODE 4.	D.1 Initiate action to fully insert all insertable control rods. <u>AND</u>	Immediately (continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
D. (continued)	D.2 Initiate action to restore secondary containment to OPERABLE status.	1 hour
	<u>AND</u>	
	D.3 Initiate action to restore one standby gas treatment (SGT) subsystem to OPERABLE status.	1 hour
	<u>AND</u>	
	D.4 Initiate action to restore isolation capability in each required secondary containment penetration flow path not isolated.	1 hour
E. SDM not within limits in MODE 5.	E.1 Suspend CORE ALTERATIONS except for control rod insertion and fuel assembly removal.	Immediately
	<u>AND</u>	
	E.2 Initiate action to fully insert all insertable control rods in core cells containing one or more fuel assemblies.	Immediately
	<u>AND</u>	(continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
E. (continued)	E.3 Initiate action to restore secondary containment to OPERABLE status.	1 hour
	<u>AND</u>	
	E.4 Initiate action to restore one SGT subsystem to OPERABLE status.	1 hour
	<u>AND</u>	
	E.5 Initiate action to restore isolation capability in each required secondary containment penetration flow path not isolated.	1 hour

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
<p>SR 3.1.1.1 Verify SDM is:</p> <ul style="list-style-type: none"> a. $\geq 0.38\% \Delta k/k$ with the highest worth control rod analytically determined; or b. $\geq 0.28\% \Delta k/k$ with the highest worth control rod determined by test. 	<p>Prior to each in vessel fuel movement during fuel loading sequence</p> <p><u>AND</u></p> <p>Once within 4 hours after criticality following fuel movement within the reactor pressure vessel or control rod replacement</p>

3.1 REACTIVITY CONTROL SYSTEMS

3.1.2 Reactivity Anomalies

LC0 3.1.2 The reactivity difference between the monitored core k_{eff} and the predicted core k_{eff} shall be within $\pm 1\% \Delta k/k$.

APPLICABILITY: MODES 1 and 2.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. Core reactivity difference not within limit.	A.1 Restore core reactivity difference to within limit.	72 hours
B. Required Action and associated Completion Time not met.	B.1 Be in MODE 3.	12 hours

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
<p>SR 3.1.2.1 Verify core reactivity difference between the monitored core k_{eff} and the predicted core k_{eff} is within $\pm 1\% \Delta k/k$.</p>	<p>Once within 24 hours after reaching equilibrium conditions following startup after fuel movement within the reactor pressure vessel or control rod replacement</p> <p><u>AND</u></p> <p>1000 MWD/T thereafter during operations in MODE 1</p>

3.1 REACTIVITY CONTROL SYSTEMS

3.1.3 Control Rod OPERABILITY

LC0 3.1.3 Each control rod shall be OPERABLE.

APPLICABILITY: MODES 1 and 2.

ACTIONS

-----NOTE-----
Separate Condition entry is allowed for each control rod.

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One withdrawn control rod stuck.	-----NOTE----- Rod worth minimizer (RWM) may be bypassed as allowed by LC0 3.3.2.1, "Control Rod Block Instrumentation," if required, to allow continued operation. -----	
	A.1 Verify stuck control rod separation criteria are met.	Immediately
	<u>AND</u>	
	A.2 Disarm the associated control rod drive (CRD). <u>AND</u>	2 hours
		(continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. (continued)	A.3 Perform SR 3.1.3.2 and SR 3.1.3.3 for each withdrawn OPERABLE control rod.	24 hours from discovery of Condition A concurrent with THERMAL POWER greater than the low power setpoint (LPSP) of the RWM
	<u>AND</u> A.4 Perform SR 3.1.1.1.	72 hours
B. Two or more withdrawn control rods stuck.	B.1 Be in MODE 3.	12 hours
C. One or more control rods inoperable for reasons other than Condition A or B.	C.1 -----NOTE----- RWM may be bypassed as allowed by LCO 3.3.2.1, if required, to allow insertion of inoperable control rod and continued operation. ----- Fully insert inoperable control rod.	3 hours
	<u>AND</u> C.2 Disarm the associated CRD.	4 hours

(continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
<p>D. -----NOTE----- Not applicable when THERMAL POWER > 10% RTP. -----</p> <p>Two or more inoperable control rods not in compliance with analyzed rod position sequence and not separated by two or more OPERABLE control rods.</p>	<p>D.1 Restore compliance with analyzed rod position sequence.</p> <p><u>OR</u></p> <p>D.2 Restore control rod to OPERABLE status.</p>	<p>4 hours</p> <p>4 hours</p>
<p>E. Required Action and associated Completion Time of Condition A, C, or D not met.</p> <p><u>OR</u></p> <p>Nine or more control rods inoperable.</p>	<p>E.1 Be in MODE 3.</p>	<p>12 hours</p>

SURVEILLANCE REQUIREMENTS

SURVEILLANCE		FREQUENCY
SR 3.1.3.1	Determine the position of each control rod.	24 hours
SR 3.1.3.2	<p>-----NOTE----- Not required to be performed until 7 days after the control rod is withdrawn and THERMAL POWER is greater than the LPSP of RWM. -----</p> <p>Insert each fully withdrawn control rod at least one notch.</p>	7 days
SR 3.1.3.3	<p>-----NOTE----- Not required to be performed until 31 days after the control rod is withdrawn and THERMAL POWER is greater than the LPSP of the RWM. -----</p> <p>Insert each partially withdrawn control rod at least one notch.</p>	31 days
SR 3.1.3.4	Verify each control rod scram time from fully withdrawn to 90% insertion is ≤ 7 seconds.	In accordance with SR 3.1.4.1, SR 3.1.4.2, SR 3.1.4.3, and SR 3.1.4.4

(continued)

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
SR 3.1.3.5 Verify each control rod does not go to the withdrawn overtravel position.	Each time the control rod is withdrawn to "full out" position <u>AND</u> Prior to declaring control rod OPERABLE after work on control rod or CRD System that could affect coupling

3.1 REACTIVITY CONTROL SYSTEMS

3.1.4 Control Rod Scram Times

- LCO 3.1.4
- a. No more than 12 OPERABLE control rods shall be "slow," in accordance with Table 3.1.4-1; and
 - b. No more than 2 OPERABLE control rods that are "slow" shall occupy adjacent locations.

APPLICABILITY: MODES 1 and 2.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. Requirements of the LCO not met.	A.1 Be in MODE 3.	12 hours

SURVEILLANCE REQUIREMENTS

-----NOTE-----
During single control rod scram time Surveillances, the control rod drive (CRD) pumps shall be isolated from the associated scram accumulator.

SURVEILLANCE	FREQUENCY
SR 3.1.4.1 Verify each control rod scram time is within the limits of Table 3.1.4-1 with reactor steam dome pressure \geq 800 psig.	Prior to exceeding 40% RTP after each reactor shutdown \geq 120 days

(continued)

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
SR 3.1.4.2 Verify, for a representative sample, each tested control rod scram time is within the limits of Table 3.1.4-1 with reactor steam dome pressure \geq 800 psig.	120 days cumulative operation in MODE 1
SR 3.1.4.3 Verify each affected control rod scram time is within the limits of Table 3.1.4-1 with any reactor steam dome pressure.	Prior to declaring control rod OPERABLE after work on control rod or CRD System that could affect scram time
SR 3.1.4.4 Verify each affected control rod scram time is within the limits of Table 3.1.4-1 with reactor steam dome pressure \geq 800 psig.	<p>Prior to exceeding 40% RTP after fuel movement within the affected core cell</p> <p><u>AND</u></p> <p>Prior to exceeding 40% RTP after work on control rod or CRD System that could affect scram time</p>

Table 3.1.4-1 (page 1 of 1)
Control Rod Scram Times

- NOTES-----
1. OPERABLE control rods with scram times not within the limits of this Table are considered "slow."
 2. Enter applicable Conditions and Required Actions of LCO 3.1.3, "Control Rod OPERABILITY," for control rods with scram times > 7 seconds to 90% insertion. These control rods are inoperable, in accordance with SR 3.1.3.4, and are not considered "slow."
-

PERCENT INSERTION	SCRAM TIMES(a)(b) (seconds) when REACTOR STEAM DOME PRESSURE \geq 800 psig
5	0.36
20	0.84
50	1.86
90	3.25

- (a) Maximum scram time from fully withdrawn position based on de-energization of scram pilot valve solenoids at time zero.
- (b) Scram times as a function of reactor steam dome pressure when < 800 psig are within established limits.

3.1 REACTIVITY CONTROL SYSTEMS

3.1.5 Control Rod Scram Accumulators

LC0 3.1.5 Each control rod scram accumulator shall be OPERABLE.

APPLICABILITY: MODES 1 and 2.

ACTIONS

-----NOTE-----
Separate Condition entry is allowed for each control rod scram accumulator.

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One control rod scram accumulator inoperable with reactor steam dome pressure ≥ 900 psig.	A.1 -----NOTE----- Only applicable if the associated control rod scram time was within the limits of Table 3.1.4-1 during the last scram time Surveillance. -----	8 hours
	Declare the associated control rod scram time "slow."	
	<u>OR</u> A.2 Declare the associated control rod inoperable.	8 hours

(continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
B. Two or more control rod scram accumulators inoperable with reactor steam dome pressure \geq 900 psig.	B.1 Restore charging water header pressure to \geq 940 psig.	20 minutes from discovery of Condition B concurrent with charging water header pressure $<$ 940 psig
	<u>AND</u>	
	B.2.1 -----NOTE----- Only applicable if the associated control rod scram time was within the limits of Table 3.1.4-1 during the last scram time Surveillance. ----- Declare the associated control rod scram time "slow."	1 hour
	<u>OR</u> B.2.2 Declare the associated control rod inoperable.	1 hour

(continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
C. One or more control rod scram accumulators inoperable with reactor steam dome pressure < 900 psig.	C.1 Verify all control rods associated with inoperable accumulators are fully inserted.	Immediately upon discovery of charging water header pressure < 940 psig
	<u>AND</u> C.2 Declare the associated control rod inoperable.	1 hour
D. Required Action B.1 or C.1 and associated Completion Time not met.	D.1 -----NOTE----- Not applicable if all inoperable control rod scram accumulators are associated with fully inserted control rods. ----- Place the reactor mode switch in the shutdown position.	Immediately

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
SR 3.1.5.1 Verify each control rod scram accumulator pressure is \geq 940 psig.	7 days

3.1 REACTIVITY CONTROL SYSTEMS

3.1.6 Rod Pattern Control

LC0 3.1.6 OPERABLE control rods shall comply with the requirements of the analyzed rod position sequence.

APPLICABILITY: MODES 1 and 2 with THERMAL POWER \leq 10% RTP.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One or more OPERABLE control rods not in compliance with the analyzed rod position sequence.	A.1 -----NOTE----- Rod worth minimizer (RWM) may be bypassed as allowed by LC0 3.3.2.1, "Control Rod Block Instrumentation." -----	
	Move associated control rod(s) to correct position.	8 hours
	<u>OR</u> A.2 Declare associated control rod(s) inoperable.	8 hours

(continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
B. Nine or more OPERABLE control rods not in compliance with the analyzed rod position sequence.	B.1 -----NOTE----- Rod worth minimizer (RWM) may be bypassed as allowed by LCO 3.3.2.1. -----	Immediately
	Suspend withdrawal of control rods.	
	<u>AND</u> B.2 Place the reactor mode switch in the shutdown position.	1 hour

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
SR 3.1.6.1 Verify all OPERABLE control rods comply with the analyzed rod position sequence.	24 hours

3.1 REACTIVITY CONTROL SYSTEMS

3.1.7 Standby Liquid Control (SLC) System

LC0 3.1.7 Two SLC subsystems shall be OPERABLE.

APPLICABILITY: MODES 1 and 2.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One SLC subsystem inoperable.	A.1 Restore SLC subsystem to OPERABLE status.	7 days
B. Two SLC subsystems inoperable.	B.1 Restore one SLC subsystem to OPERABLE status.	8 hours
C. Required Action and associated Completion Time not met.	C.1 Be in MODE 3.	12 hours

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
SR 3.1.7.1 Verify available volume of sodium pentaborate solution is within the limits of Figure 3.1.7-1.	24 hours
SR 3.1.7.2 Verify temperature of sodium pentaborate solution is within the limits of Figure 3.1.7-2.	24 hours
SR 3.1.7.3 Verify temperature of pump suction piping is $\geq 83^{\circ}\text{F}$.	24 hours
SR 3.1.7.4 Verify continuity of explosive charge.	31 days
SR 3.1.7.5 Verify the concentration of sodium pentaborate in solution is within the limits of Figure 3.1.7-1.	<p>31 days</p> <p><u>AND</u></p> <p>Once within 24 hours after water or sodium pentaborate is added to solution</p> <p><u>AND</u></p> <p>Once within 24 hours after solution temperature is restored within the limits of Figure 3.1.7-2</p>

(continued)

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
SR 3.1.7.6 Verify each SLC subsystem manual valve in the flow path that is not locked, sealed, or otherwise secured in position is in the correct position, or can be aligned to the correct position.	31 days
SR 3.1.7.7 Verify each pump develops a flow rate ≥ 40 gpm at a discharge pressure ≥ 1275 psig.	In accordance with the Inservice Testing Program
SR 3.1.7.8 Verify flow through one SLC subsystem from pump into reactor pressure vessel.	24 months on a STAGGERED TEST BASIS
SR 3.1.7.9 Verify all heat traced piping between storage tank and pump suction is unblocked.	24 months <u>AND</u> Once within 24 hours after piping temperature is restored within the limits of Figure 3.1.7-2

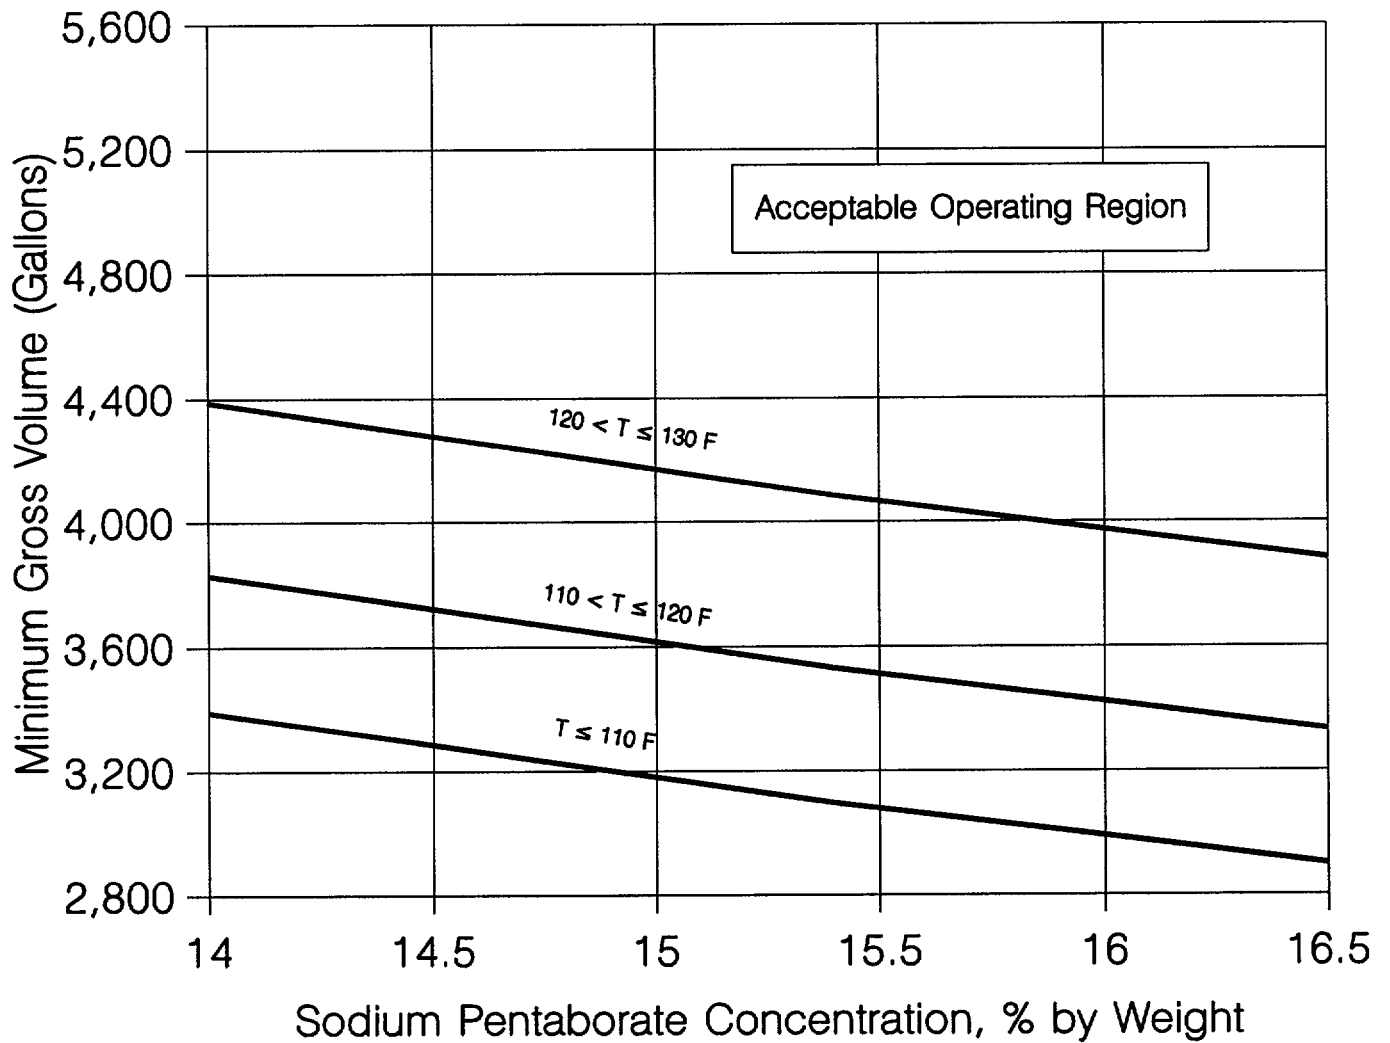


Figure 3.1.7-1 (page 1 of 1)
Sodium Pentaborate Volume Requirements

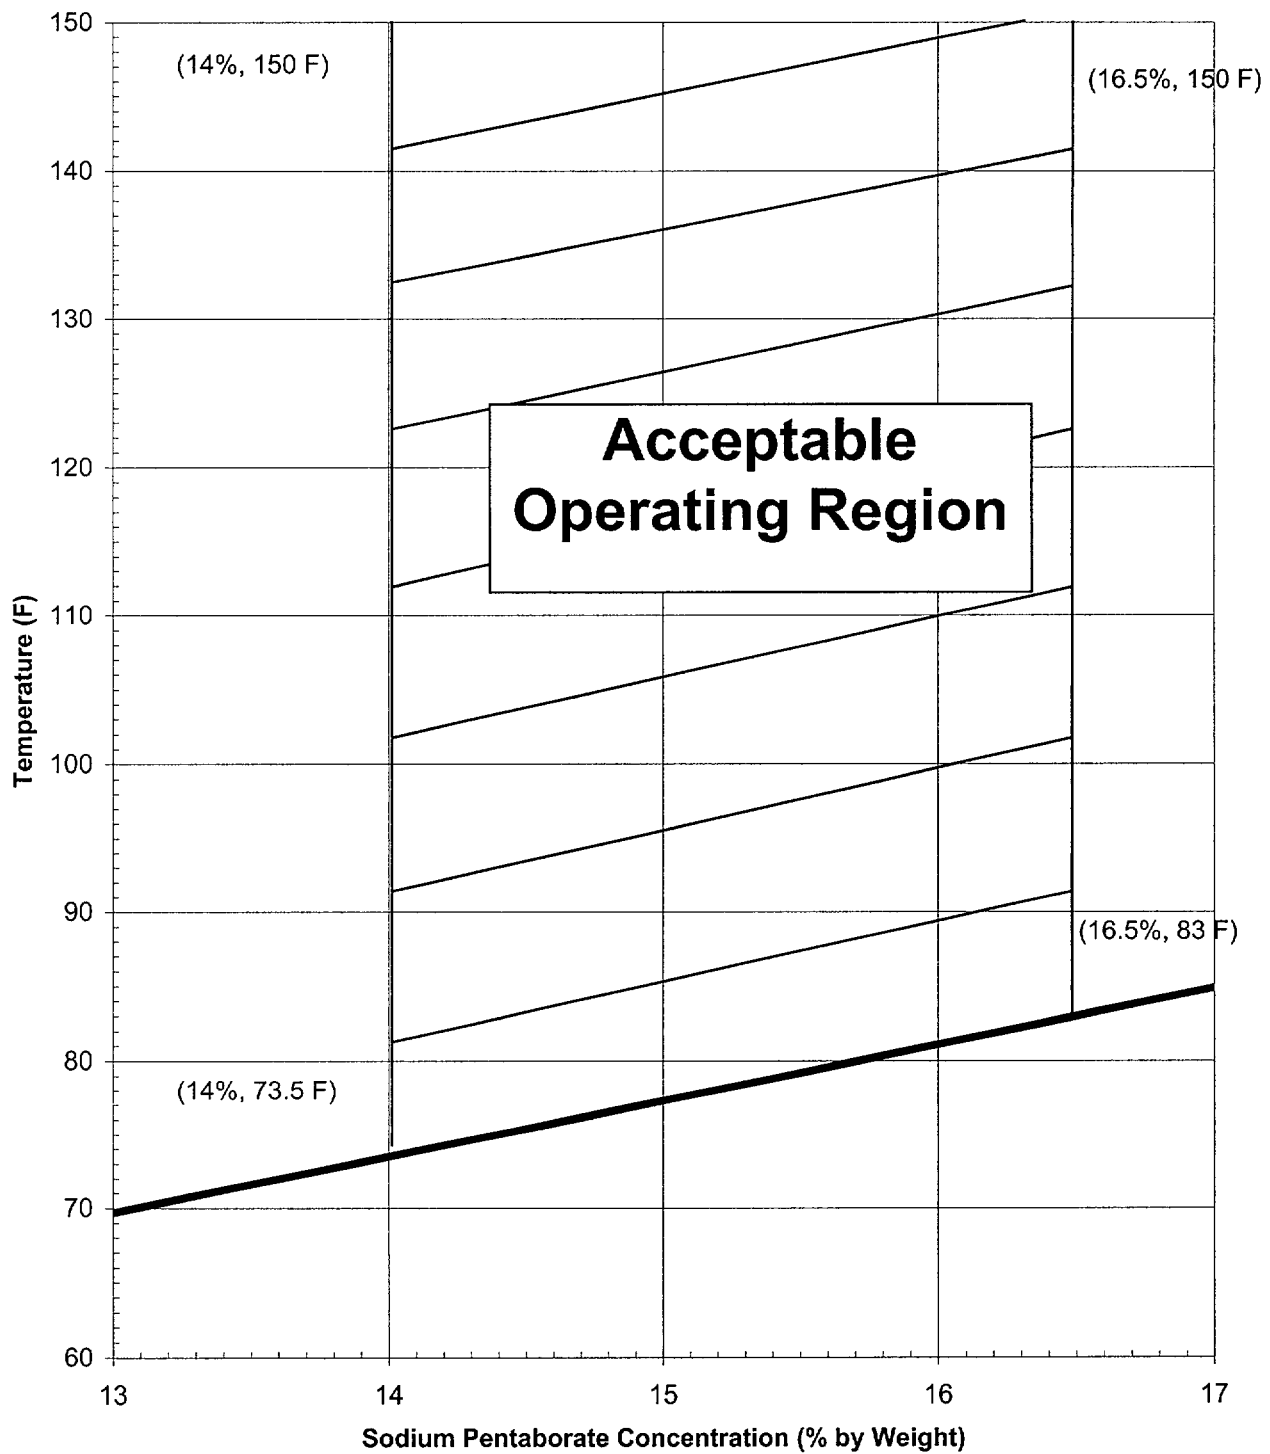


Figure 3.1.7-2 (page 1 of 1)
Sodium Pentaborate Temperature Requirements

3.1 REACTIVITY CONTROL SYSTEMS

3.1.8 Scram Discharge Volume (SDV) Vent and Drain Valves

LC0 3.1.8 Each SDV vent and drain valve shall be OPERABLE.

APPLICABILITY: MODES 1 and 2.

ACTIONS

- NOTES-----
1. Separate Condition entry is allowed for each SDV vent and drain line.
 2. An isolated line may be unisolated under administrative control to allow draining and venting of the SDV.
-

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One or more SDV vent or drain lines with one valve inoperable.	A.1 Isolate the associated line.	7 days
B. One or more SDV vent or drain lines with both valves inoperable.	B.1 Isolate the associated line.	8 hours
C. Required Action and associated Completion Time not met.	C.1 Be in MODE 3.	12 hours

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
<p>SR 3.1.8.1 -----NOTE----- Not required to be met on vent and drain valves closed during performance of SR 3.1.8.2. ----- Verify each SDV vent and drain valve is open.</p>	31 days
<p>SR 3.1.8.2 Cycle each SDV vent and drain valve to the fully closed and fully open position.</p>	92 days
<p>SR 3.1.8.3 Verify each SDV vent and drain valve:</p> <ul style="list-style-type: none"> a. Closes in \leq 30 seconds after receipt of an actual or simulated scram signal; and b. Opens when the actual or simulated scram signal is reset. 	24 months

3.2 POWER DISTRIBUTION LIMITS

3.2.1 AVERAGE PLANAR LINEAR HEAT GENERATION RATE (APLHGR)

LC0 3.2.1 All APLHGRs shall be less than or equal to the limits specified in the COLR.

APPLICABILITY: THERMAL POWER \geq 25% RTP.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. Any APLHGR not within limits.	A.1 Restore APLHGR(s) to within limits.	2 hours
B. Required Action and associated Completion Time not met.	B.1 Reduce THERMAL POWER to < 25% RTP.	4 hours

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
SR 3.2.1.1 Verify all APLHGRs are less than or equal to the limits specified in the COLR.	Once within 12 hours after \geq 25% RTP <u>AND</u> 24 hours thereafter

3.2 POWER DISTRIBUTION LIMITS

3.2.2 MINIMUM CRITICAL POWER RATIO (MCPR)

LC0 3.2.2 All MCPRs shall be greater than or equal to the MCPR operating limits specified in the COLR.

APPLICABILITY: THERMAL POWER \geq 25% RTP.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. Any MCPR not within limits.	A.1 Restore MCPR(s) to within limits.	2 hours
B. Required Action and associated Completion Time not met.	B.1 Reduce THERMAL POWER to < 25% RTP.	4 hours

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
SR 3.2.2.1 Verify all MCPRs are greater than or equal to the limits specified in the COLR.	Once within 12 hours after \geq 25% RTP <u>AND</u> 24 hours thereafter

(continued)

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
SR 3.2.2.2 Determine the MCPR limits.	Once within 72 hours after each completion of SR 3.1.4.1 <u>AND</u> Once within 72 hours after each completion of SR 3.1.4.2 <u>AND</u> Once within 72 hours after each completion of SR 3.1.4.4

3.2 POWER DISTRIBUTION LIMITS

3.2.3 LINEAR HEAT GENERATION RATE (LHGR)

LC0 3.2.3 All LHGRs shall be less than or equal to the limits specified in the COLR.

APPLICABILITY: THERMAL POWER \geq 25% RTP.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. Any LHGR not within limits.	A.1 Restore LHGR(s) to within limits.	2 hours
B. Required Action and associated Completion Time not met.	B.1 Reduce THERMAL POWER to $<$ 25% RTP.	4 hours

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
SR 3.2.3.1 Verify all LHGRs are less than or equal to the limits specified in the COLR.	Once within 12 hours after \geq 25% RTP <u>AND</u> 24 hours thereafter

3.2 POWER DISTRIBUTION LIMITS

3.2.4 Average Power Range Monitor (APRM) Gain and Setpoint

- LCO 3.2.4
- a. FDLRC shall be less than or equal to 1.0; or
 - b. Each required APRM Flow Biased Neutron Flux-High Function Allowable Value shall be modified by $1/\text{FDLRC}$; or
 - c. Each required APRM gain shall be adjusted such that the APRM readings are $\geq 100\%$ times the Fraction of RTP (F RTP) times FDLRC.

APPLICABILITY: THERMAL POWER $\geq 25\%$ RTP.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. Requirements of the LCO not met.	A.1 Satisfy the requirements of the LCO.	6 hours
B. Required Action and associated Completion Time not met.	B.1 Reduce THERMAL POWER to $< 25\%$ RTP.	4 hours

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
<p>SR 3.2.4.1 -----NOTE----- Not required to be met if SR 3.2.4.2 is satisfied for LCO 3.2.4.b or LCO 3.2.4.c requirements. ----- Verify FDLRC is within limits.</p>	<p>Once within 12 hours after \geq 25% RTP <u>AND</u> 24 hours thereafter</p>
<p>SR 3.2.4.2 -----NOTE----- Not required to be met if SR 3.2.4.1 is satisfied for LCO 3.2.4.a requirements. ----- Verify each required:</p> <ul style="list-style-type: none"> a. APRM Flow Biased Neutron Flux—High Function Allowable Value is modified by 1/FDLRC; or b. APRM gain is adjusted such that the APRM reading is \geq 100% times the F RTP times FDLRC. 	<p>12 hours</p>

3.3 INSTRUMENTATION

3.3.1.1 Reactor Protection System (RPS) Instrumentation

LC0 3.3.1.1 The RPS instrumentation for each Function in Table 3.3.1.1-1 shall be OPERABLE.

APPLICABILITY: According to Table 3.3.1.1-1.

ACTIONS

- NOTES-----
1. Separate Condition entry is allowed for each channel.
 2. When Functions 2.b and 2.c channels are inoperable due to APRM indication not within limits, entry into associated Conditions and Required Actions may be delayed for up to 2 hours if the APRM is indicating a lower power value than the calculated power, and for up to 12 hours if the APRM is indicating a higher power value than the calculated power.
-

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One or more required channels inoperable.	A.1 Place channel in trip.	12 hours
	<u>OR</u> A.2 Place associated trip system in trip.	12 hours
B. One or more Functions with one or more required channels inoperable in both trip systems.	B.1 Place channel in one trip system in trip.	6 hours
	<u>OR</u> B.2 Place one trip system in trip.	6 hours

(continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
C. One or more Functions with RPS trip capability not maintained.	C.1 Restore RPS trip capability.	1 hour
D. Required Action and associated Completion Time of Condition A, B, or C not met.	D.1 Enter the Condition referenced in Table 3.3.1.1-1 for the channel.	Immediately
E. As required by Required Action D.1 and referenced in Table 3.3.1.1-1.	E.1 Reduce THERMAL POWER to < 45% RTP.	4 hours
F. As required by Required Action D.1 and referenced in Table 3.3.1.1-1.	F.1 Be in MODE 2.	8 hours
	<p><u>AND</u></p> <p>F.2 -----NOTE----- Only required to be met for Function 5, Main Steam Isolation Valve-Closure, and Function 10, Turbine Condenser Vacuum-Low. -----</p> <p>Reduce reactor pressure to < 600 psig.</p>	8 hours

(continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
G. As required by Required Action D.1 and referenced in Table 3.3.1.1-1.	G.1 Be in MODE 3.	12 hours
H. As required by Required Action D.1 and referenced in Table 3.3.1.1-1.	H.1 Initiate action to fully insert all insertable control rods in core cells containing one or more fuel assemblies.	Immediately

SURVEILLANCE REQUIREMENTS

- NOTES-----
1. Refer to Table 3.3.1.1-1 to determine which SRs apply for each RPS Function.
 2. When a channel is placed in an inoperable status solely for performance of required Surveillances, entry into associated Conditions and Required Actions may be delayed for up to 6 hours provided the associated Function maintains RPS trip capability.
-

SURVEILLANCE		FREQUENCY
SR 3.3.1.1.1	Perform CHANNEL CHECK.	12 hours
SR 3.3.1.1.2	<p>-----NOTE-----</p> <p>Not required to be performed until 12 hours after THERMAL POWER \geq 25% RTP.</p> <p>-----</p> <p>Verify the absolute difference between the average power range monitor (APRM) channels and the calculated power is \leq 2% RTP plus any gain adjustment required by LCO 3.2.4, "Average Power Range Monitor (APRM) Gain and Setpoint" while operating at \geq 25% RTP.</p>	7 days
SR 3.3.1.1.3	Adjust the channel to conform to a calibrated flow signal.	7 days

(continued)

SURVEILLANCE REQUIREMENTS

SURVEILLANCE		FREQUENCY
SR 3.3.1.1.4	<p>-----NOTE----- Not required to be performed when entering MODE 2 from MODE 1 until 24 hours after entering MODE 2. -----</p> <p>Perform CHANNEL FUNCTIONAL TEST.</p>	7 days
SR 3.3.1.1.5	Perform a functional test of each RPS automatic scram contactor.	7 days
SR 3.3.1.1.6	Verify the source range monitor (SRM) and intermediate range monitor (IRM) channels overlap.	Prior to fully withdrawing SRMs
SR 3.3.1.1.7	<p>-----NOTE----- Only required to be met during entry into MODE 2 from MODE 1. -----</p> <p>Verify the IRM and APRM channels overlap.</p>	7 days
SR 3.3.1.1.8	Perform CHANNEL FUNCTIONAL TEST.	31 days
SR 3.3.1.1.9	Calibrate the local power range monitors.	2000 effective full power hours
SR 3.3.1.1.10	Perform CHANNEL CALIBRATION.	31 days

(continued)

SURVEILLANCE REQUIREMENTS

SURVEILLANCE		FREQUENCY
SR 3.3.1.1.11	Perform CHANNEL FUNCTIONAL TEST.	92 days
SR 3.3.1.1.12	Calibrate the trip units.	92 days
SR 3.3.1.1.13	Perform CHANNEL CALIBRATION.	92 days
SR 3.3.1.1.14	Verify Turbine Stop Valve-Closure and Turbine Control Valve Fast Closure, Trip Oil Pressure-Low Functions are not bypassed when THERMAL POWER is \geq 45% RTP.	92 days
SR 3.3.1.1.15	<p>-----NOTES-----</p> <ol style="list-style-type: none"> 1. Neutron detectors are excluded. 2. For Function 2.a, not required to be performed when entering MODE 2 from MODE 1 until 24 hours after entering MODE 2. 3. For Function 2.b, not required for the flow portion of the channels. <p>-----</p> <p>Perform CHANNEL CALIBRATION.</p>	184 days
SR 3.3.1.1.16	Perform CHANNEL FUNCTIONAL TEST.	24 months

(continued)

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
<p>SR 3.3.1.1.17 -----NOTES-----</p> <ol style="list-style-type: none"> 1. Neutron detectors are excluded. 2. For Function 1.a, not required to be performed when entering MODE 2 from MODE 1 until 24 hours after entering MODE 2. <p>-----</p> <p>Perform CHANNEL CALIBRATION.</p>	<p>24 months</p>
<p>SR 3.3.1.1.18 Perform LOGIC SYSTEM FUNCTIONAL TEST.</p>	<p>24 months</p>
<p>SR 3.3.1.1.19 -----NOTES-----</p> <ol style="list-style-type: none"> 1. Neutron detectors are excluded. 2. For Function 5 "n" equals 4 channels for the purpose of determining the STAGGERED TEST BASIS Frequency. <p>-----</p> <p>Verify the RPS RESPONSE TIME is within limits.</p>	<p>24 months on a STAGGERED TEST BASIS</p>

Table 3.3.1.1-1 (page 1 of 3)
Reactor Protection System Instrumentation

FUNCTION	APPLICABLE MODES OR OTHER SPECIFIED CONDITIONS	REQUIRED CHANNELS PER TRIP SYSTEM	CONDITIONS REFERENCED FROM REQUIRED ACTION D.1	SURVEILLANCE REQUIREMENTS	ALLOWABLE VALUE
1. Intermediate Range Monitors					
a. Neutron Flux - High	2	3	G	SR 3.3.1.1.1 SR 3.3.1.1.4 SR 3.3.1.1.5 SR 3.3.1.1.6 SR 3.3.1.1.7 SR 3.3.1.1.17 SR 3.3.1.1.18	$\leq 121/125$ divisions of full scale
	5(a)	3	H	SR 3.3.1.1.1 SR 3.3.1.1.4 SR 3.3.1.1.5 SR 3.3.1.1.17 SR 3.3.1.1.18	$\leq 121/125$ divisions of full scale
b. Inop	2	3	G	SR 3.3.1.1.4 SR 3.3.1.1.5 SR 3.3.1.1.18	NA
	5(a)	3	H	SR 3.3.1.1.4 SR 3.3.1.1.5 SR 3.3.1.1.18	NA
2. Average Power Range Monitors					
a. Neutron Flux - High, Setdown	2	2	G	SR 3.3.1.1.1 SR 3.3.1.1.4 SR 3.3.1.1.5 SR 3.3.1.1.7 SR 3.3.1.1.9 SR 3.3.1.1.15 SR 3.3.1.1.18	$\leq 17.1\%$ RTP
b. Flow Biased Neutron Flux - High	1	2	F	SR 3.3.1.1.1 SR 3.3.1.1.2 SR 3.3.1.1.3 SR 3.3.1.1.5 SR 3.3.1.1.9 SR 3.3.1.1.11 SR 3.3.1.1.15 SR 3.3.1.1.17 SR 3.3.1.1.18 SR 3.3.1.1.19	≤ 0.58 W + 63.5% RTP and $\leq 120\%$ RTP ^(b)
(continued)					

(a) With any control rod withdrawn from a core cell containing one or more fuel assemblies.

(b) 0.58 W + 59.2% and $\leq 118.5\%$ RTP when reset for single loop operation per LCO 3.4.1, "Recirculation Loops Operating."

Table 3.3.1.1-1 (page 2 of 3)
Reactor Protection System Instrumentation

FUNCTION	APPLICABLE MODES OR OTHER SPECIFIED CONDITIONS	REQUIRED CHANNELS PER TRIP SYSTEM	CONDITIONS REFERENCED FROM REQUIRED ACTION D.1	SURVEILLANCE REQUIREMENTS	ALLOWABLE VALUE
2. Average Power Range Monitors (continued)					
c. Fixed Neutron Flux - High	1	2	F	SR 3.3.1.1.1 SR 3.3.1.1.2 SR 3.3.1.1.5 SR 3.3.1.1.9 SR 3.3.1.1.11 SR 3.3.1.1.15 SR 3.3.1.1.18 SR 3.3.1.1.19	≤ 120% RTP
d. Inop	1,2	2	G	SR 3.3.1.1.5 SR 3.3.1.1.9 SR 3.3.1.1.11 SR 3.3.1.1.18	NA
3. Reactor Vessel Steam Dome Pressure - High	1,2	2	G	SR 3.3.1.1.5 SR 3.3.1.1.8 SR 3.3.1.1.13 SR 3.3.1.1.18 SR 3.3.1.1.19	≤ 1058 psig
4. Reactor Vessel Water Level - Low	1,2	2	G	SR 3.3.1.1.1 SR 3.3.1.1.5 SR 3.3.1.1.11 SR 3.3.1.1.12 SR 3.3.1.1.17 SR 3.3.1.1.18 SR 3.3.1.1.19	≥ 10.24 inches
5. Main Steam Isolation Valve - Closure	1, 2 ^(c)	8	F	SR 3.3.1.1.5 SR 3.3.1.1.11 SR 3.3.1.1.17 SR 3.3.1.1.18 SR 3.3.1.1.19	≤ 9.5% closed
6. Drywell Pressure - High	1,2	2	G	SR 3.3.1.1.5 SR 3.3.1.1.11 SR 3.3.1.1.13 SR 3.3.1.1.18 SR 3.3.1.1.19	≤ 1.94 psig

(continued)

(c) With reactor pressure ≥ 600 psig.

Table 3.3.1.1-1 (page 3 of 3)
Reactor Protection System Instrumentation

FUNCTION	APPLICABLE MODES OR OTHER SPECIFIED CONDITIONS	REQUIRED CHANNELS PER TRIP SYSTEM	CONDITIONS REFERENCED FROM REQUIRED ACTION D.1	SURVEILLANCE REQUIREMENTS	ALLOWABLE VALUE
7. Scram Discharge Volume Water Level - High					
a. Thermal Switch (Unit 2)	1,2	2	G	SR 3.3.1.1.5 SR 3.3.1.1.11	≤ 37.9 gallons (Unit 2)
Float Switch (Unit 3)				SR 3.3.1.1.17 SR 3.3.1.1.18	≤ 39.1 gallons (Unit 3)
	5(a)	2	H	SR 3.3.1.1.5 SR 3.3.1.1.11 SR 3.3.1.1.17 SR 3.3.1.1.18	≤ 37.9 gallons (Unit 2) ≤ 39.1 gallons (Unit 3)
b. Differential Pressure Switch	1,2	2	G	SR 3.3.1.1.5 SR 3.3.1.1.11 SR 3.3.1.1.17 SR 3.3.1.1.18	≤ 37.9 gallons (Unit 2) ≤ 39.1 gallons (Unit 3)
	5(a)	2	H	SR 3.3.1.1.5 SR 3.3.1.1.11 SR 3.3.1.1.17 SR 3.3.1.1.18	≤ 37.9 gallons (Unit 2) ≤ 39.1 gallons (Unit 3)
8. Turbine Stop Valve - Closure	≥ 45% RTP	4	E	SR 3.3.1.1.5 SR 3.3.1.1.11 SR 3.3.1.1.14 SR 3.3.1.1.17 SR 3.3.1.1.18 SR 3.3.1.1.19	≤ 9.5% closed
9. Turbine Control Valve Fast Closure, Trip Oil Pressure - Low	≥ 45% RTP	2	E	SR 3.3.1.1.5 SR 3.3.1.1.11 SR 3.3.1.1.14 SR 3.3.1.1.17 SR 3.3.1.1.18 SR 3.3.1.1.19	≥ 466 psig
10. Turbine Condenser Vacuum - Low	1, 2(c)	2	F	SR 3.3.1.1.5 SR 3.3.1.1.8 SR 3.3.1.1.10 SR 3.3.1.1.18 SR 3.3.1.1.19	≥ 21.15 inches Hg vacuum
11. Reactor Mode Switch - Shutdown Position	1,2	1	G	SR 3.3.1.1.16 SR 3.3.1.1.18	NA
	5(a)	1	H	SR 3.3.1.1.16 SR 3.3.1.1.18	NA
12. Manual Scram	1,2	1	G	SR 3.3.1.1.8 SR 3.3.1.1.18	NA
	5(a)	1	H	SR 3.3.1.1.8 SR 3.3.1.1.18	NA

(a) With any control rod withdrawn from a core cell containing one or more fuel assemblies.

(c) With reactor pressure ≥ 600 psig.

3.3 INSTRUMENTATION

3.3.1.2 Source Range Monitor (SRM) Instrumentation

LC0 3.3.1.2 The SRM instrumentation in Table 3.3.1.2-1 shall be OPERABLE.

APPLICABILITY: According to Table 3.3.1.2-1.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One or more required SRMs inoperable in MODE 2 with intermediate range monitors (IRMs) on Range 2 or below.	A.1 Restore required SRMs to OPERABLE status.	4 hours
B. Three required SRMs inoperable in MODE 2 with IRMs on Range 2 or below.	B.1 Suspend control rod withdrawal.	Immediately
C. Required Action and associated Completion Time of Condition A or B not met.	C.1 Be in MODE 3.	12 hours

(continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
D. One or more required SRMs inoperable in MODE 3 or 4.	D.1 Fully insert all insertable control rods.	1 hour
	<u>AND</u> D.2 Place reactor mode switch in the shutdown position.	1 hour
E. One or more required SRMs inoperable in MODE 5.	E.1 Suspend CORE ALTERATIONS except for control rod insertion.	Immediately
	<u>AND</u> E.2 Initiate action to fully insert all insertable control rods in core cells containing one or more fuel assemblies.	Immediately

SURVEILLANCE REQUIREMENTS

-----NOTE-----
Refer to Table 3.3.1.2-1 to determine which SRs apply for each applicable MODE or other specified condition.

SURVEILLANCE		FREQUENCY
SR 3.3.1.2.1	Perform CHANNEL CHECK.	12 hours
SR 3.3.1.2.2	<p>-----NOTES-----</p> <ol style="list-style-type: none"> 1. Only required to be met during CORE ALTERATIONS. 2. One SRM may be used to satisfy more than one of the following. <p>-----</p> <p>Verify an OPERABLE SRM detector is located in:</p> <ol style="list-style-type: none"> a. The fueled region; b. The core quadrant where CORE ALTERATIONS are being performed, when the associated SRM is included in the fueled region; and c. A core quadrant adjacent to where CORE ALTERATIONS are being performed, when the associated SRM is included in the fueled region. 	12 hours
SR 3.3.1.2.3	Perform CHANNEL CHECK.	24 hours

(continued)

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
<p>SR 3.3.1.2.4 -----NOTE----- Not required to be met with less than or equal to four fuel assemblies adjacent to the SRM and no other fuel assemblies in the associated core quadrant. ----- Verify count rate is: a. ≥ 3.0 cps; or b. ≥ 0.7 cps with a signal to noise ratio $\geq 20:1$.</p>	<p>12 hours during CORE ALTERATIONS <u>AND</u> 24 hours</p>
<p>SR 3.3.1.2.5 -----NOTE----- The determination of signal to noise ratio is not required to be met with less than or equal to four fuel assemblies adjacent to the SRM and no other fuel assemblies in the associated core quadrant. ----- Perform CHANNEL FUNCTIONAL TEST and determination of signal to noise ratio.</p>	<p>7 days</p>
<p>SR 3.3.1.2.6 -----NOTE----- Not required to be performed until 12 hours after IRMs on Range 2 or below. ----- Perform CHANNEL FUNCTIONAL TEST and determination of signal to noise ratio.</p>	<p>31 days</p>

(continued)

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
<p>SR 3.3.1.2.7 -----NOTES-----</p> <p>1. Neutron detectors are excluded.</p> <p>2. Not required to be performed until 12 hours after IRMs on Range 2 or below.</p> <p>-----</p> <p>Perform CHANNEL CALIBRATION.</p>	<p>24 months</p>

Table 3.3.1.2-1 (page 1 of 1)
Source Range Monitor Instrumentation

FUNCTION	APPLICABLE MODES OR OTHER SPECIFIED CONDITIONS	REQUIRED CHANNELS	SURVEILLANCE REQUIREMENTS
1. Source Range Monitor	2 ^(a)	3	SR 3.3.1.2.1
			SR 3.3.1.2.4
			SR 3.3.1.2.6
			SR 3.3.1.2.7
	3,4	2	SR 3.3.1.2.3
			SR 3.3.1.2.4
			SR 3.3.1.2.6
			SR 3.3.1.2.7
	5	2 ^{(b)(c)}	SR 3.3.1.2.1
			SR 3.3.1.2.2
			SR 3.3.1.2.4
			SR 3.3.1.2.5
			SR 3.3.1.2.7

(a) With IRMs on Range 2 or below.

(b) Only one SRM channel is required to be OPERABLE during spiral offload or reload when the fueled region includes only that SRM detector.

(c) Special movable detectors may be used in place of SRMs if connected to normal SRM circuits.

3.3 INSTRUMENTATION

3.3.2.1 Control Rod Block Instrumentation

LC0 3.3.2.1 The control rod block instrumentation for each Function in Table 3.3.2.1-1 shall be OPERABLE.

APPLICABILITY: According to Table 3.3.2.1-1.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One rod block monitor (RBM) channel inoperable.	A.1 Restore RBM channel to OPERABLE status.	24 hours
B. Required Action and associated Completion Time of Condition A not met. <u>OR</u> Two RBM channels inoperable.	B.1 Place one RBM channel in trip.	1 hour
C. Rod worth minimizer (RWM) inoperable during reactor startup.	C.1 Suspend control rod movement except by scram. <u>OR</u>	Immediately (continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
C. (continued)	C.2.1.1 Verify ≥ 12 rods withdrawn.	Immediately
	<u>OR</u>	
	C.2.1.2 Verify by administrative methods that startup with RWM inoperable has not been performed in the last 12 months.	Immediately
	<u>AND</u>	
	C.2.2 Verify movement of control rods is in compliance with analyzed rod position sequence by a second licensed operator or other qualified member of the technical staff.	During control rod movement
D. RWM inoperable during reactor shutdown.	D.1 Verify movement of control rods is in compliance with analyzed rod position sequence by a second licensed operator or other qualified member of the technical staff.	During control rod movement

(continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
E. One or more Reactor Mode Switch—Shutdown Position channels inoperable.	E.1 Suspend control rod withdrawal.	Immediately
	<u>AND</u>	
	E.2 Initiate action to fully insert all insertable control rods in core cells containing one or more fuel assemblies.	Immediately

SURVEILLANCE REQUIREMENTS

- NOTES-----
1. Refer to Table 3.3.2.1-1 to determine which SRs apply for each Control Rod Block Function.
 2. When an RBM channel is placed in an inoperable status solely for performance of required Surveillances, entry into associated Conditions and Required Actions may be delayed for up to 6 hours provided the associated Function maintains control rod block capability.
-

SURVEILLANCE		FREQUENCY
SR 3.3.2.1.1	Perform CHANNEL FUNCTIONAL TEST.	92 days
SR 3.3.2.1.2	<p>-----NOTE-----</p> <p>Not required to be performed until 1 hour after any control rod is withdrawn at $\leq 10\%$ RTP in MODE 2.</p> <p>-----</p> <p>Perform CHANNEL FUNCTIONAL TEST.</p>	92 days
SR 3.3.2.1.3	<p>-----NOTE-----</p> <p>Not required to be performed until 1 hour after THERMAL POWER is $\leq 10\%$ RTP in MODE 1.</p> <p>-----</p> <p>Perform CHANNEL FUNCTIONAL TEST.</p>	92 days
SR 3.3.2.1.4	<p>-----NOTE-----</p> <p>Neutron detectors are excluded.</p> <p>-----</p> <p>Perform CHANNEL CALIBRATION.</p>	92 days

(continued)

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
<p>SR 3.3.2.1.5 -----NOTE----- Neutron detectors are excluded. -----</p> <p>Verify the RBM is not bypassed when THERMAL POWER is \geq 30% RTP and when a peripheral control rod is not selected.</p>	92 days
<p>SR 3.3.2.1.6 Verify the RWM is not bypassed when THERMAL POWER is \leq 10% RTP.</p>	24 months
<p>SR 3.3.2.1.7 -----NOTE----- Not required to be performed until 1 hour after reactor mode switch is in the shutdown position. -----</p> <p>Perform CHANNEL FUNCTIONAL TEST.</p>	24 months
<p>SR 3.3.2.1.8 Verify control rod sequences input to the RWM are in conformance with analyzed rod position sequence.</p>	Prior to declaring RWM OPERABLE following loading of sequence into RWM
<p>SR 3.3.2.1.9 Verify the bypassing and position of control rods required to be bypassed in RWM by a second licensed operator or other qualified member of the technical staff.</p>	Prior to and during the movement of control rods bypassed in RWM

Control Rod Block Instrumentation
3.3.2.1

Table 3.3.2.1-1 (page 1 of 1)
Control Rod Block Instrumentation

FUNCTION	APPLICABLE MODES OR OTHER SPECIFIED CONDITIONS	REQUIRED CHANNELS	SURVEILLANCE REQUIREMENTS	ALLOWABLE VALUE
1. Rod Block Monitor				
a. Upscale	(a)	2	SR 3.3.2.1.1 SR 3.3.2.1.4 SR 3.3.2.1.5	As specified in the COLR
b. Inop	(a)	2	SR 3.3.2.1.1 SR 3.3.2.1.5	NA
c. Downscale	(a)	2	SR 3.3.2.1.1 SR 3.3.2.1.4 SR 3.3.2.1.5	$\geq 4.03\%$ RTP
2. Rod Worth Minimizer	1 ^(b) , 2 ^(b)	1	SR 3.3.2.1.2 SR 3.3.2.1.3 SR 3.3.2.1.6 SR 3.3.2.1.8 SR 3.3.2.1.9	NA
3. Reactor Mode Switch — Shutdown Position	(c)	2	SR 3.3.2.1.7	NA

(a) THERMAL POWER $\geq 30\%$ RTP and no peripheral control rod selected.

(b) With THERMAL POWER $\leq 10\%$ RTP.

(c) Reactor mode switch in the shutdown position.

Feedwater System and Main Turbine High Water Level Trip Instrumentation
3.3.2.2

3.3 INSTRUMENTATION

3.3.2.2 Feedwater System and Main Turbine High Water Level Trip
Instrumentation

LC0 3.3.2.2 Four channels of Feedwater System and main turbine high
water level trip instrumentation shall be OPERABLE.

APPLICABILITY: THERMAL POWER \geq 25% RTP.

ACTIONS

-----NOTE-----
Separate Condition entry is allowed for each channel.

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One or more Feedwater System and main turbine high water level trip channels inoperable.	A.1 Place channel in trip.	7 days
B. Feedwater System and main turbine high water level trip capability not maintained.	B.1 Restore Feedwater System and main turbine high water level trip capability.	2 hours

(continued)

Feedwater System and Main Turbine High Water Level Trip Instrumentation
3.3.2.2

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
C. Required Action and associated Completion Time not met.	C.1 -----NOTE----- Only applicable if inoperable channel is the result of an inoperable feedwater pump breaker. -----	
	Remove affected feedwater pump(s) from service.	4 hours
	<u>OR</u>	
	C.2 Reduce THERMAL POWER to < 25% RTP.	4 hours

SURVEILLANCE REQUIREMENTS

-----NOTE-----
When a channel is placed in an inoperable status solely for performance of required Surveillances, entry into associated Conditions and Required Actions may be delayed for up to 6 hours provided Feedwater System and main turbine high water level trip capability is maintained.

SURVEILLANCE	FREQUENCY
SR 3.3.2.2.1 Perform CHANNEL CHECK.	12 hours
SR 3.3.2.2.2 Perform CHANNEL FUNCTIONAL TEST.	92 days
SR 3.3.2.2.3 Calibrate the trip units.	92 days
SR 3.3.2.2.4 Perform CHANNEL CALIBRATION. The Allowable Value shall be ≤ 53.25 inches.	24 months
SR 3.3.2.2.5 Perform LOGIC SYSTEM FUNCTIONAL TEST, including breaker and valve actuation.	24 months

3.3 INSTRUMENTATION

3.3.3.1 Post Accident Monitoring (PAM) Instrumentation

LC0 3.3.3.1 The PAM instrumentation for each Function in Table 3.3.3.1-1 shall be OPERABLE.

APPLICABILITY: MODES 1 and 2.

ACTIONS

NOTES

1. LC0 3.0.4 is not applicable.
2. Separate Condition entry is allowed for each Function.

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One or more Functions with one required channel inoperable.	A.1 Restore required channel to OPERABLE status.	30 days
B. Required Action and associated Completion Time of Condition A not met.	B.1 Initiate action in accordance with Specification 5.6.6.	Immediately
C. One or more Functions with two required channels inoperable.	C.1 Restore one required channel to OPERABLE status.	7 days

(continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
D. Required Action and associated Completion Time of Condition C not met.	D.1 Enter the Condition referenced in Table 3.3.3.1-1 for the channel.	Immediately
E. As required by Required Action D.1 and referenced in Table 3.3.3.1-1.	E.1 Be in MODE 3.	12 hours
F. As required by Required Action D.1 and referenced in Table 3.3.3.1-1.	F.1 Initiate action in accordance with Specification 5.6.6.	Immediately

SURVEILLANCE REQUIREMENTS

- NOTES-----
1. These SRs apply to each Function in Table 3.3.3.1-1, except where identified in the SR.
 2. When a channel is placed in an inoperable status solely for performance of required Surveillances, entry into associated Conditions and Required Actions may be delayed for up to 6 hours provided the other required channel in the associated Function is OPERABLE.
-

SURVEILLANCE		FREQUENCY
SR 3.3.3.1.1	Perform CHANNEL CHECK.	31 days
SR 3.3.3.1.2	Perform CHANNEL CALIBRATION for Functions 4.b, 7, and 8.	92 days
SR 3.3.3.1.3	<p>-----NOTE-----</p> <p>For Function 2, not required for the transmitters of the channels.</p> <p>-----</p> <p>Perform CHANNEL CALIBRATION for Functions 1 and 2.</p>	184 days
SR 3.3.3.1.4	Perform CHANNEL CALIBRATION for Functions 3 and 9.	12 months
SR 3.3.3.1.5	Perform CHANNEL CALIBRATION for Functions 2, 4.a, 5, and 6.	24 months

Table 3.3.3.1-1 (page 1 of 1)
Post Accident Monitoring Instrumentation

FUNCTION	REQUIRED CHANNELS	CONDITIONS REFERENCED FROM REQUIRED ACTION D.1
1. Reactor Vessel Pressure	2	E
2. Reactor Vessel Water Level		
a. Fuel Zone (Wide Range)	2	E
b. Medium Range	2	E
3. Torus Water Level	2	E
4. Drywell Pressure		
a. Wide Range	2	E
b. Narrow Range	2	E
5. Drywell Radiation Monitors	2	F
6. Penetration Flow Path PCIV Position	2 per penetration flow path ^{(a)(b)}	E
7. Drywell H ₂ Concentration Analyzer and Monitor	2	E
8. Drywell O ₂ Concentration Analyzer and Monitor	2	E
9. Torus Water Temperature	2	E

(a) Not required for isolation valves whose associated penetration flow path is isolated by at least one closed and deactivated automatic valve, closed manual valve, blind flange, or check valve with flow through the valve secured.

(b) Only one position indication channel is required for penetration flow paths with only one installed control room indication channel.

3.3 INSTRUMENTATION

3.3.4.1 Anticipated Transient Without Scram Recirculation Pump Trip (ATWS-RPT) Instrumentation

LC0 3.3.4.1 Two channels per trip system for each ATWS-RPT instrumentation Function listed below shall be OPERABLE:

- a. Reactor Vessel Water Level - Low Low; and
- b. Reactor Vessel Steam Dome Pressure - High.

APPLICABILITY: MODE 1.

ACTIONS

-----NOTE-----
Separate Condition entry is allowed for each channel.

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One or more channels inoperable.	A.1 Restore channel to OPERABLE status.	14 days
	<p><u>OR</u></p> <p>A.2 -----NOTE----- Not applicable if inoperable channel is the result of an inoperable breaker. -----</p> <p>Place channel in trip.</p>	14 days

(continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
B. One Function with ATWS-RPT trip capability not maintained.	B.1 Restore ATWS-RPT trip capability.	72 hours
C. Both Functions with ATWS-RPT trip capability not maintained.	C.1 Restore ATWS-RPT trip capability for one Function.	1 hour
D. Required Action and associated Completion Time not met.	D.1 Remove the associated recirculation pump from service.	6 hours
	<u>OR</u> D.2 Be in MODE 2.	6 hours

SURVEILLANCE REQUIREMENTS

-----NOTE-----
When a channel is placed in an inoperable status solely for performance of required Surveillances, entry into associated Conditions and Required Actions may be delayed for up to 6 hours provided the associated Function maintains ATWS-RPT trip capability.

SURVEILLANCE	FREQUENCY
SR 3.3.4.1.1 Perform CHANNEL CHECK.	12 hours
SR 3.3.4.1.2 Calibrate the trip units.	92 days
SR 3.3.4.1.3 Perform CHANNEL FUNCTIONAL TEST.	92 days
SR 3.3.4.1.4 Perform CHANNEL CALIBRATION. The Allowable Values shall be: <ul style="list-style-type: none"> a. Reactor Vessel Water Level—Low Low: ≥ -54.15 inches with time delay set to ≥ 8.3 seconds and ≤ 9.7 seconds; and b. Reactor Vessel Steam Dome Pressure—High: ≤ 1231 psig. 	24 months
SR 3.3.4.1.5 Perform LOGIC SYSTEM FUNCTIONAL TEST including breaker actuation.	24 months

3.3 INSTRUMENTATION

3.3.5.1 Emergency Core Cooling System (ECCS) Instrumentation

LC0 3.3.5.1 The ECCS instrumentation for each Function in Table 3.3.5.1-1 shall be OPERABLE.

APPLICABILITY: According to Table 3.3.5.1-1.

ACTIONS

-----NOTE-----
Separate Condition entry is allowed for each channel.

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One or more channels inoperable.	A.1 Enter the Condition referenced in Table 3.3.5.1-1 for the channel.	Immediately

(continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
B. As required by Required Action A.1 and referenced in Table 3.3.5.1-1.	B.1 -----NOTES----- 1. Only applicable in MODES 1, 2, and 3. 2. Only applicable for Functions 1.a, 1.b, 2.a, 2.b, 2.d, and 2.j. ----- Declare supported feature(s) inoperable when its redundant feature ECCS initiation capability is inoperable.	1 hour from discovery of loss of initiation capability for feature(s) in both divisions
	<u>AND</u>	
	B.2 -----NOTE----- Only applicable for Functions 3.a and 3.b. ----- Declare High Pressure Coolant Injection (HPCI) System inoperable.	1 hour from discovery of loss of HPCI initiation capability
	<u>AND</u>	
	B.3 Place channel in trip.	24 hours

(continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
C. As required by Required Action A.1 and referenced in Table 3.3.5.1-1.	C.1 -----NOTES----- 1. Only applicable in MODES 1, 2, and 3. 2. Only applicable for Functions 1.c, 1.e, 2.c, 2.e, 2.g, 2.h, 2.i, and 2.k. ----- Declare supported feature(s) inoperable when its redundant feature ECCS initiation capability is inoperable.	1 hour from discovery of loss of initiation capability for feature(s) in both divisions
	<u>AND</u>	
	C.2 Restore channel to OPERABLE status.	24 hours

(continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
D. As required by Required Action A.1 and referenced in Table 3.3.5.1-1.	D.1 -----NOTE----- Only applicable if HPCI pump suction is not aligned to the suppression pool. ----- Declare HPCI System inoperable.	1 hour from discovery of loss of HPCI initiation capability
	<u>AND</u>	
	D.2.1 Place channel in trip.	24 hours
	<u>OR</u> D.2.2 Align the HPCI pump suction to the suppression pool.	24 hours

(continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
E. As required by Required Action A.1 and referenced in Table 3.3.5.1-1.	E.1 -----NOTES----- 1. Only applicable in MODES 1, 2, and 3. 2. Only applicable for Functions 1.d and 2.f. ----- Declare supported feature(s) inoperable when its redundant feature ECCS initiation capability is inoperable.	1 hour from discovery of loss of initiation capability for subsystems in both divisions
	<u>AND</u> E.2 Restore channel to OPERABLE status.	7 days

(continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
F. As required by Required Action A.1 and referenced in Table 3.3.5.1-1.	F.1 Declare Automatic Depressurization System (ADS) valves inoperable.	1 hour from discovery of loss of ADS initiation capability in both trip systems
	<u>AND</u>	
	F.2 Place channel in trip.	96 hours from discovery of inoperable channel concurrent with HPCI or isolation condenser (IC) inoperable
		<u>AND</u>
		8 days

(continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
G. As required by Required Action A.1 and referenced in Table 3.3.5.1-1.	G.1 Declare ADS valves inoperable.	1 hour from discovery of loss of ADS initiation capability in both trip systems
	<u>AND</u> G.2 Restore channel to OPERABLE status.	96 hours from discovery of inoperable channel concurrent with HPCI or IC inoperable <u>AND</u> 8 days
H. Required Action and associated Completion Time of Condition B, C, D, E, F, or G not met.	H.1 Declare associated supported feature(s) inoperable.	Immediately

SURVEILLANCE REQUIREMENTS

- NOTES-----
1. Refer to Table 3.3.5.1-1 to determine which SRs apply for each ECCS Function.
 2. When a channel is placed in an inoperable status solely for performance of required Surveillances, entry into associated Conditions and Required Actions may be delayed as follows: (a) for up to 6 hours for Functions 3.c, 3.f, and 3.g; and (b) for up to 6 hours for Functions other than 3.c, 3.f, and 3.g provided the associated Function or the redundant Function maintains ECCS initiation capability.
-

SURVEILLANCE	FREQUENCY
SR 3.3.5.1.1 Perform CHANNEL CHECK.	12 hours
SR 3.3.5.1.2 Perform CHANNEL FUNCTIONAL TEST.	92 days
SR 3.3.5.1.3 Calibrate the trip unit.	92 days
SR 3.3.5.1.4 Perform CHANNEL CALIBRATION.	92 days
SR 3.3.5.1.5 Perform CHANNEL CALIBRATION.	24 months
SR 3.3.5.1.6 Perform LOGIC SYSTEM FUNCTIONAL TEST.	24 months

Table 3.3.5.1-1 (page 1 of 5)
Emergency Core Cooling System Instrumentation

FUNCTION	APPLICABLE MODES OR OTHER SPECIFIED CONDITIONS	REQUIRED CHANNELS PER FUNCTION	CONDITIONS REFERENCED FROM REQUIRED ACTION A.1	SURVEILLANCE REQUIREMENTS	ALLOWABLE VALUE
1. Core Spray System					
a. Reactor Vessel Water Level - Low Low	1,2,3, 4(a), 5(a)	4(b)	B	SR 3.3.5.1.1 SR 3.3.5.1.2 SR 3.3.5.1.3 SR 3.3.5.1.5 SR 3.3.5.1.6	\geq -54.15 inches
b. Drywell Pressure - High	1,2,3	4(b)	B	SR 3.3.5.1.2 SR 3.3.5.1.4 SR 3.3.5.1.6	\leq 1.81 psig
c. Reactor Steam Dome Pressure - Low (Permissive)	1,2,3 4(a), 5(a)	2 2	C B	SR 3.3.5.1.2 SR 3.3.5.1.4 SR 3.3.5.1.6 SR 3.3.5.1.2 SR 3.3.5.1.4 SR 3.3.5.1.6	\geq 308.5 psig and \leq 341.7 psig \geq 308.5 psig and \leq 341.7 psig
d. Core Spray Pump Discharge Flow - Low (Bypass)	1,2,3, 4(a), 5(a)	1 per pump	E	SR 3.3.5.1.2 SR 3.3.5.1.3 SR 3.3.5.1.5 SR 3.3.5.1.6	\geq 802 gpm and \leq 992 gpm
e. Core Spray Pump Start-Time Delay Relay	1, 2, 3 4(a), 5(a)	1 per pump	C	SR 3.3.5.1.5 SR 3.3.5.1.6	\leq 13.8 seconds
2. Low Pressure Coolant Injection (LPCI) System					
a. Reactor Vessel Water Level - Low Low	1,2,3, 4(a), 5(a)	4	B	SR 3.3.5.1.1 SR 3.3.5.1.2 SR 3.3.5.1.3 SR 3.3.5.1.5 SR 3.3.5.1.6	\geq -54.15 inches
b. Drywell Pressure - High	1,2,3	4	B	SR 3.3.5.1.2 SR 3.3.5.1.4 SR 3.3.5.1.6	\leq 1.81 psig
c. Reactor Steam Dome Pressure - Low (Permissive)	1,2,3 4(a), 5(a)	2 2	C B	SR 3.3.5.1.2 SR 3.3.5.1.4 SR 3.3.5.1.6 SR 3.3.5.1.2 SR 3.3.5.1.4 SR 3.3.5.1.6	\geq 308.5 psig and \leq 341.7 psig \geq 308.5 psig and \leq 341.7 psig
(continued)					

(a) When associated ECCS subsystem(s) are required to be OPERABLE per LCO 3.5.2, "ECCS - Shutdown."

(b) Also required to initiate the associated diesel generator (DG).

Table 3.3.5.1-1 (page 2 of 5)
Emergency Core Cooling System Instrumentation

FUNCTION	APPLICABLE MODES OR OTHER SPECIFIED CONDITIONS	REQUIRED CHANNELS PER FUNCTION	CONDITIONS REFERENCED FROM REQUIRED ACTION A.1	SURVEILLANCE REQUIREMENTS	ALLOWABLE VALUE
2. LPCI System (continued)					
d. Reactor Steam Dome Pressure - Low (Break Detection)	1,2,3	4	B	SR 3.3.5.1.2 SR 3.3.5.1.5 SR 3.3.5.1.6	≥ 802 psig and ≤ 898 psig
e. Low Pressure Coolant Injection Pump Start - Time Delay Relay Pumps B and D	1,2,3, 4(a), 5(a)	1 per pump	C	SR 3.3.5.1.5 SR 3.3.5.1.6	≤ 8.8 seconds
f. Low Pressure Coolant Injection Pump Discharge Flow - Low (Bypass)	1,2,3, 4(a), 5(a)	1 per loop	E	SR 3.3.5.1.2 SR 3.3.5.1.3 SR 3.3.5.1.5 SR 3.3.5.1.6	≥ 1107 gpm
g. Recirculation Pump Differential Pressure - High (Break Detection)	1,2,3	4 per pump	C	SR 3.3.5.1.2 SR 3.3.5.1.5 SR 3.3.5.1.6	≤ 5.9 psid
h. Recirculation Riser Differential Pressure - High (Break Detection)	1,2,3	4	C	SR 3.3.5.1.2 SR 3.3.5.1.5 SR 3.3.5.1.6	≤ 2.0 psid
i. Recirculation Pump Differential Pressure Time Delay - Relay (Break Detection)	1,2,3	2	C	SR 3.3.5.1.5 SR 3.3.5.1.6	≤ 0.53 seconds
j. Reactor Steam Dome Pressure Time Delay - Relay (Break Detection)	1,2,3	2	B	SR 3.3.5.1.5 SR 3.3.5.1.6	≤ 2.12 seconds
k. Recirculation Riser Differential Pressure Time Delay - Relay (Break Detection)	1,2,3	2	C	SR 3.3.5.1.5 SR 3.3.5.1.6	≤ 0.53 seconds

(continued)

(a) When associated ECCS subsystem(s) are required to be OPERABLE per LCO 3.5.2.

Table 3.3.5.1-1 (page 3 of 5)
Emergency Core Cooling System Instrumentation

FUNCTION	APPLICABLE MODES OR OTHER SPECIFIED CONDITIONS	REQUIRED CHANNELS PER FUNCTION	CONDITIONS REFERENCED FROM REQUIRED ACTION A.1	SURVEILLANCE REQUIREMENTS	ALLOWABLE VALUE
3. High Pressure Coolant Injection (HPCI) System					
a. Reactor Vessel Water Level - Low Low	1, 2(c), 3(c)	4	B	SR 3.3.5.1.1 SR 3.3.5.1.2 SR 3.3.5.1.3 SR 3.3.5.1.5 SR 3.3.5.1.6	\geq -54.15 inches
b. Drywell Pressure - High	1, 2(c), 3(c)	4	B	SR 3.3.5.1.2 SR 3.3.5.1.4 SR 3.3.5.1.6	\leq 1.81 psig
c. Reactor Vessel Water Level - High	1, 2(c), 3(c)	2	C	SR 3.3.5.1.1 SR 3.3.5.1.2 SR 3.3.5.1.3 SR 3.3.5.1.5 SR 3.3.5.1.6	\leq 46.2 inches
d. Contaminated Condensate Storage Tank (CCST) Level - Low	1, 2(c), 3(c)	2 per CCST	D	SR 3.3.5.1.2 SR 3.3.5.1.5 SR 3.3.5.1.6	\geq 11.1158 ft for CCST 2/3 A and \geq 7.5637 ft for CCST 2/3 B
e. Suppression Pool Water Level - High	1, 2(c), 3(c)	2	D	SR 3.3.5.1.2 SR 3.3.5.1.5 SR 3.3.5.1.6	\leq 15 ft 5.625 inches
f. High Pressure Coolant Injection Pump Discharge Flow - Low (Bypass)	1, 2(c), 3(c)	1	E	SR 3.3.5.1.2 SR 3.3.5.1.4 SR 3.3.5.1.6	\geq 616 gpm
g. Manual Initiation	1, 2(c), 3(c)	1	C	SR 3.3.5.1.6	NA

(continued)

(c) With reactor steam dome pressure > 150 psig.

Table 3.3.5.1-1 (page 4 of 5)
Emergency Core Cooling System Instrumentation

FUNCTION	APPLICABLE MODES OR OTHER SPECIFIED CONDITIONS	REQUIRED CHANNELS PER FUNCTION	CONDITIONS REFERENCED FROM REQUIRED ACTION A.1	SURVEILLANCE REQUIREMENTS	ALLOWABLE VALUE
4. Automatic Depressurization System (ADS) Trip System A					
a. Reactor Vessel Water Level - Low Low	1, 2(c), 3(c)	2	F	SR 3.3.5.1.1 SR 3.3.5.1.2 SR 3.3.5.1.3 SR 3.3.5.1.5 SR 3.3.5.1.6	\geq -54.15 inches
b. Drywell Pressure - High	1, 2(c), 3(c)	2	F	SR 3.3.5.1.2 SR 3.3.5.1.4 SR 3.3.5.1.6	\leq 1.81 psig
c. Automatic Depressurization System Initiation Timer	1, 2(c), 3(c)	1	G	SR 3.3.5.1.5 SR 3.3.5.1.6	\leq 113 seconds
d. Core Spray Pump Discharge Pressure - High	1, 2(c), 3(c)	2	G	SR 3.3.5.1.2 SR 3.3.5.1.4 SR 3.3.5.1.6	\geq 101.5 psig and \leq 148.5 psig
e. Low Pressure Coolant Injection Pump Discharge Pressure - High	1, 2(c), 3(c)	4	G	SR 3.3.5.1.2 SR 3.3.5.1.4 SR 3.3.5.1.6	\geq 101.5 psig and \leq 148.5 psig
f. Automatic Depressurization System Low Low Water Level Actuation Timer	1, 2(c), 3(c)	1	G	SR 3.3.5.1.5 SR 3.3.5.1.6	\leq 580 seconds

(continued)

(c) With reactor steam dome pressure > 150 psig.

Table 3.3.5.1-1 (page 5 of 5)
Emergency Core Cooling System Instrumentation

FUNCTION	APPLICABLE MODES OR OTHER SPECIFIED CONDITIONS	REQUIRED CHANNELS PER FUNCTION	CONDITIONS REFERENCED FROM REQUIRED ACTION A.1	SURVEILLANCE REQUIREMENTS	ALLOWABLE VALUE
5. ADS Trip System B					
a. Reactor Vessel Water Level - Low Low	1, 2(c), 3(c)	2	F	SR 3.3.5.1.1 SR 3.3.5.1.2 SR 3.3.5.1.3 SR 3.3.5.1.5 SR 3.3.5.1.6	\geq -54.15 inches
b. Drywell Pressure - High	1, 2(c), 3(c)	2	F	SR 3.3.5.1.2 SR 3.3.5.1.4 SR 3.3.5.1.6	\leq 1.81 psig
c. Automatic Depressurization System Initiation Timer	1, 2(c), 3(c)	1	G	SR 3.3.5.1.5 SR 3.3.5.1.6	\leq 113 seconds
d. Core Spray Pump Discharge Pressure - High	1, 2(c), 3(c)	2	G	SR 3.3.5.1.2 SR 3.3.5.1.4 SR 3.3.5.1.6	\geq 101.5 psig and \leq 148.5 psig
e. Low Pressure Coolant Injection Pump Discharge Pressure - High	1, 2(c), 3(c)	4	G	SR 3.3.5.1.2 SR 3.3.5.1.4 SR 3.3.5.1.6	\geq 101.5 psig and \leq 148.5 psig
f. Automatic Depressurization System Low Low Water Level Actuation Timer	1, 2(c), 3(c)	1	G	SR 3.3.5.1.5 SR 3.3.5.1.6	\leq 580 seconds

(c) With reactor steam dome pressure > 150 psig.

3.3 INSTRUMENTATION

3.3.5.2 Isolation Condenser (IC) System Instrumentation

LC0 3.3.5.2 Four channels of Reactor Vessel Pressure—High instrumentation shall be OPERABLE.

APPLICABILITY: MODE 1,
MODES 2 and 3 with reactor steam dome pressure > 150 psig.

ACTIONS

-----NOTE-----
Separate Condition entry is allowed for each channel.

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One or more Reactor Vessel Pressure—High channels inoperable.	A.1 Declare IC System inoperable.	1 hour from discovery of loss of IC initiation capability
	<u>AND</u> A.2 Place channel(s) in trip.	24 hours
B. Required Action and associated Completion Time not met.	B.1 Declare IC System inoperable.	Immediately

SURVEILLANCE REQUIREMENTS

-----NOTE-----
When a channel is placed in an inoperable status solely for performance of required Surveillances, entry into associated Conditions and Required Actions may be delayed for up to 6 hours provided the Reactor Vessel Pressure-High Function maintains IC initiation capability.

SURVEILLANCE	FREQUENCY
SR 3.3.5.2.1 Perform CHANNEL FUNCTIONAL TEST.	31 days
SR 3.3.5.2.2 -----NOTE----- Not required for the time delay portion of the channel. ----- Perform CHANNEL CALIBRATION. The Allowable Value shall be ≤ 1068 psig.	92 days
SR 3.3.5.2.3 Perform CHANNEL CALIBRATION for the time delay portion of the channel. The Allowable Value shall be ≤ 17 seconds.	24 months
SR 3.3.5.2.4 Perform LOGIC SYSTEM FUNCTIONAL TEST.	24 months

3.3 INSTRUMENTATION

3.3.6.1 Primary Containment Isolation Instrumentation

LC0 3.3.6.1 The primary containment isolation instrumentation for each Function in Table 3.3.6.1-1 shall be OPERABLE.

APPLICABILITY: According to Table 3.3.6.1-1.

ACTIONS

-----NOTE-----
Separate Condition entry is allowed for each channel.

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One or more required channels inoperable.	A.1 Place channel in trip.	12 hours for Functions 1.a, 2.a, 2.b, 5.b, and 6.b <u>AND</u> 24 hours for Functions other than Functions 1.a, 2.a, 2.b, 5.b, and 6.b
B. One or more automatic Functions with isolation capability not maintained.	B.1 Restore isolation capability.	1 hour

(continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
C. Required Action and associated Completion Time of Condition A or B not met.	C.1 Enter the Condition referenced in Table 3.3.6.1-1 for the channel.	Immediately
D. As required by Required Action C.1 and referenced in Table 3.3.6.1-1.	D.1 Isolate associated main steam line (MSL). <u>OR</u> D.2.1 Be in MODE 3. <u>AND</u> D.2.2 Be in MODE 4.	12 hours 12 hours 36 hours
E. As required by Required Action C.1 and referenced in Table 3.3.6.1-1.	E.1 Be in MODE 2.	8 hours
F. As required by Required Action C.1 and referenced in Table 3.3.6.1-1.	F.1 Isolate the affected penetration flow path(s).	1 hour

(continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
<p>G. Required Action and associated Completion Time for Condition F not met.</p> <p><u>OR</u></p> <p>As required by Required Action C.1 and referenced in Table 3.3.6.1-1.</p>	<p>G.1 Be in MODE 3.</p>	12 hours
	<p><u>AND</u></p> <p>G.2 Be in MODE 4.</p>	36 hours
<p>H. As required by Required Action C.1 and referenced in Table 3.3.6.1-1.</p>	<p>H.1 Declare associated standby liquid control subsystem (SLC) inoperable.</p>	1 hour
	<p><u>OR</u></p> <p>H.2 Isolate the Reactor Water Cleanup System.</p>	1 hour
<p>I. As required by Required Action C.1 and referenced in Table 3.3.6.1-1.</p>	<p>I.1 Initiate action to restore channel to OPERABLE status.</p>	Immediately
	<p><u>OR</u></p> <p>I.2 Initiate action to isolate the Shutdown Cooling System.</p>	Immediately

SURVEILLANCE REQUIREMENTS

- NOTES-----
1. Refer to Table 3.3.6.1-1 to determine which SRs apply for each Primary Containment Isolation Function.
 2. When a channel is placed in an inoperable status solely for performance of required Surveillances, entry into associated Conditions and Required Actions may be delayed for up to 6 hours provided the associated Function maintains isolation capability.
-

SURVEILLANCE	FREQUENCY
SR 3.3.6.1.1 Perform CHANNEL CHECK.	12 hours
SR 3.3.6.1.2 Perform CHANNEL FUNCTIONAL TEST.	92 days
SR 3.3.6.1.3 Calibrate the trip unit.	92 days
SR 3.3.6.1.4 Perform CHANNEL CALIBRATION.	92 days
SR 3.3.6.1.5 Perform CHANNEL FUNCTIONAL TEST.	24 months
SR 3.3.6.1.6 Perform CHANNEL CALIBRATION.	24 months
SR 3.3.6.1.7 Perform LOGIC SYSTEM FUNCTIONAL TEST.	24 months

Primary Containment Isolation Instrumentation
3.3.6.1

Table 3.3.6.1-1 (page 1 of 3)
Primary Containment Isolation Instrumentation

FUNCTION	APPLICABLE MODES OR OTHER SPECIFIED CONDITIONS	REQUIRED CHANNELS PER TRIP SYSTEM	CONDITIONS REFERENCED FROM REQUIRED ACTION C.1	SURVEILLANCE REQUIREMENTS	ALLOWABLE VALUE
1. Main Steam Line Isolation					
a. Reactor Vessel Water Level - Low Low	1,2,3	2	D	SR 3.3.6.1.1 SR 3.3.6.1.2 SR 3.3.6.1.3 SR 3.3.6.1.6 SR 3.3.6.1.7	≥ -56.77 inches
b. Main Steam Line Pressure - Low	1	2	E	SR 3.3.6.1.2 SR 3.3.6.1.4 SR 3.3.6.1.7	≥ 831 psig
c. Main Steam Line Pressure - Timer	1	2	E	SR 3.3.6.1.2 SR 3.3.6.1.6 SR 3.3.6.1.7	≤ 0.280 seconds (Unit 2) ≤ 0.236 seconds (Unit 3)
d. Main Steam Line Flow - High	1,2,3	2 per MSL	D	SR 3.3.6.1.1 SR 3.3.6.1.2 SR 3.3.6.1.4 SR 3.3.6.1.7	≤ 160.5 psid (Unit 2) ≤ 117.1 psid (Unit 3)
e. Main Steam Line Tunnel Temperature - High	1,2,3	2 per trip string	D	SR 3.3.6.1.5 SR 3.3.6.1.6 SR 3.3.6.1.7	≤ 200°F
2. Primary Containment Isolation					
a. Reactor Vessel Water Level - Low	1,2,3	2	G	SR 3.3.6.1.1 SR 3.3.6.1.2 SR 3.3.6.1.3 SR 3.3.6.1.6 SR 3.3.6.1.7	≥ 10.24 inches
b. Drywell Pressure - High	1,2,3	2	G	SR 3.3.6.1.2 SR 3.3.6.1.4 SR 3.3.6.1.7	≤ 1.94 psig
c. Drywell Radiation - High	1,2,3	1	F	SR 3.3.6.1.1 SR 3.3.6.1.2 SR 3.3.6.1.6 SR 3.3.6.1.7	≤ 77 R/hr

(continued)

Primary Containment Isolation Instrumentation
3.3.6.1

Table 3.3.6.1-1 (page 2 of 3)
Primary Containment Isolation Instrumentation

FUNCTION	APPLICABLE MODES OR OTHER SPECIFIED CONDITIONS	REQUIRED CHANNELS PER TRIP SYSTEM	CONDITIONS REFERENCED FROM REQUIRED ACTION C.1	SURVEILLANCE REQUIREMENTS	ALLOWABLE VALUE
3. High Pressure Coolant Injection (HPCI) System Isolation					
a. HPCI Steam Line Flow - High	1,2,3	1	F	SR 3.3.6.1.2 SR 3.3.6.1.3 SR 3.3.6.1.6 SR 3.3.6.1.7	$\leq 290.16\%$ of rated steam flow (Unit 2) $\leq 288.23\%$ of rated steam flow (Unit 3)
b. HPCI Steam Line Flow - Timer	1,2,3	1	F	SR 3.3.6.1.2 SR 3.3.6.1.6 SR 3.3.6.1.7	≥ 3.2 seconds and ≤ 8.8 seconds
c. HPCI Steam Supply Line Pressure - Low	1,2,3	2	F	SR 3.3.6.1.2 SR 3.3.6.1.3 SR 3.3.6.1.6 SR 3.3.6.1.7	≥ 104 psig
d. HPCI Turbine Area Temperature - High	1,2,3	4 ^(a)	F	SR 3.3.6.1.5 SR 3.3.6.1.6 SR 3.3.6.1.7	$\leq 189^{\circ}\text{F}$
4. Isolation Condenser System Isolation					
a. Steam Flow - High	1,2,3	1	F	SR 3.3.6.1.2 SR 3.3.6.1.4 SR 3.3.6.1.7	$\leq 290.76\%$ of rated steam flow
b. Return Flow - High	1,2,3	1	F	SR 3.3.6.1.2 SR 3.3.6.1.4 SR 3.3.6.1.7	≤ 30.2 inches water (Unit 2) ≤ 13.7 inches water (Unit 3)

(continued)

(a) All four channels must be associated with a single trip string.

Primary Containment Isolation Instrumentation
3.3.6.1

Table 3.3.6.1-1 (page 3 of 3)
Primary Containment Isolation Instrumentation

FUNCTION	APPLICABLE MODES OR OTHER SPECIFIED CONDITIONS	REQUIRED CHANNELS PER TRIP SYSTEM	CONDITIONS REFERENCED FROM REQUIRED ACTION C.1	SURVEILLANCE REQUIREMENTS	ALLOWABLE VALUE
5. Reactor Water Cleanup System Isolation					
a. SLC System Initiation	1,2	1	H	SR 3.3.6.1.7	NA
b. Reactor Vessel Water Level - Low	1,2,3	2	F	SR 3.3.6.1.1 SR 3.3.6.1.2 SR 3.3.6.1.3 SR 3.3.6.1.6 SR 3.3.6.1.7	≥ 10.24 inches
6. Shutdown Cooling System Isolation					
a. Recirculation Line Water Temperature - High	1,2,3	2	F	SR 3.3.6.1.2 SR 3.3.6.1.6 SR 3.3.6.1.7	≤ 346°F
b. Reactor Vessel Water Level - Low	3,4,5	2 ^(b)	I	SR 3.3.6.1.1 SR 3.3.6.1.2 SR 3.3.6.1.3 SR 3.3.6.1.6 SR 3.3.6.1.7	≥ 10.24 inches

(b) In MODES 4 and 5, provided Shutdown Cooling System integrity is maintained, only one channel per trip system with an isolation signal available to one shutdown cooling pump suction isolation valve is required.

3.3 INSTRUMENTATION

3.3.6.2 Secondary Containment Isolation Instrumentation

LC0 3.3.6.2 The secondary containment isolation instrumentation for each Function in Table 3.3.6.2-1 shall be OPERABLE.

APPLICABILITY: According to Table 3.3.6.2-1.

ACTIONS

-----NOTE-----
Separate Condition entry is allowed for each channel.

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One or more channels inoperable.	A.1 Place channel in trip.	12 hours for Functions 1 and 2 <u>AND</u> 24 hours for Functions other than Functions 1 and 2
B. One or more Functions with isolation capability not maintained.	B.1 Restore isolation capability.	1 hour

(continued)

Secondary Containment Isolation Instrumentation
3.3.6.2

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
C. Required Action and associated Completion Time not met.	C.1.1 Isolate the associated penetration flow path.	1 hour
	<u>OR</u>	
	C.1.2 Declare associated secondary containment isolation valves inoperable.	1 hour
	<u>AND</u>	
	C.2.1 Place the associated standby gas treatment (SGT) subsystem in operation.	1 hour
	<u>OR</u>	
	C.2.2 Declare associated SGT subsystem inoperable.	1 hour

SURVEILLANCE REQUIREMENTS

- NOTES-----
1. Refer to Table 3.3.6.2-1 to determine which SRs apply for each Secondary Containment Isolation Function.
 2. When a channel is placed in an inoperable status solely for performance of required Surveillances, entry into associated Conditions and Required Actions may be delayed for up to 6 hours provided the associated Function maintains isolation capability.
-

SURVEILLANCE	FREQUENCY
SR 3.3.6.2.1 Perform CHANNEL CHECK.	12 hours
SR 3.3.6.2.2 Perform CHANNEL FUNCTIONAL TEST.	92 days
SR 3.3.6.2.3 Calibrate the trip unit.	92 days
SR 3.3.6.2.4 Perform CHANNEL CALIBRATION.	92 days
SR 3.3.6.2.5 Perform CHANNEL CALIBRATION.	24 months
SR 3.3.6.2.6 Perform LOGIC SYSTEM FUNCTIONAL TEST.	24 months

Secondary Containment Isolation Instrumentation
3.3.6.2

Table 3.3.6.2-1 (page 1 of 1)
Secondary Containment Isolation Instrumentation

FUNCTION	APPLICABLE MODES OR OTHER SPECIFIED CONDITIONS	REQUIRED CHANNELS PER TRIP SYSTEM	SURVEILLANCE REQUIREMENTS	ALLOWABLE VALUE
1. Reactor Vessel Water Level - Low	1,2,3, (a)	2	SR 3.3.6.2.1 SR 3.3.6.2.2 SR 3.3.6.2.3 SR 3.3.6.2.5 SR 3.3.6.2.6	\geq 10.24 inches
2. Drywell Pressure - High	1,2,3	2	SR 3.3.6.2.2 SR 3.3.6.2.4 SR 3.3.6.2.6	\leq 1.94 psig
3. Reactor Building Exhaust Radiation - High	1,2,3, (a),(b)	2	SR 3.3.6.2.1 SR 3.3.6.2.2 SR 3.3.6.2.4 SR 3.3.6.2.6	\leq 14.9 mR/hr
4. Refueling Floor Radiation - High	1,2,3, (a),(b)	2	SR 3.3.6.2.1 SR 3.3.6.2.2 SR 3.3.6.2.4 SR 3.3.6.2.6	\leq 100 mR/hr

(a) During operations with a potential for draining the reactor vessel.

(b) During CORE ALTERATIONS and during movement of irradiated fuel assemblies in secondary containment.

3.3 INSTRUMENTATION

3.3.6.3 Relief Valve Instrumentation

LC0 3.3.6.3 The relief valve instrumentation for each Function in Table 3.3.6.3-1 shall be OPERABLE.

APPLICABILITY: MODES 1, 2, and 3.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One relief valve inoperable due to inoperable channel(s).	A.1 Restore channel(s) to OPERABLE status.	14 days
B. Required Action and associated Completion Time of Condition A not met. <u>OR</u> Two or more relief valves inoperable due to inoperable channels.	B.1 Be in MODE 3. <u>AND</u> B.2 Be in MODE 4.	12 hours 36 hours

SURVEILLANCE REQUIREMENTS

-----NOTE-----
Refer to Table 3.3.6.3-1 to determine which SRs apply for each Function.

SURVEILLANCE	FREQUENCY
SR 3.3.6.3.1 Perform CHANNEL CALIBRATION.	92 days
SR 3.3.6.3.2 Perform CHANNEL CALIBRATION.	24 months
SR 3.3.6.3.3 Perform LOGIC SYSTEM FUNCTIONAL TEST.	24 months

Relief Valve Instrumentation
3.3.6.3

Table 3.3.6.3-1 (page 1 of 1)
Relief Valve Instrumentation

FUNCTION	REQUIRED CHANNELS PER FUNCTION	SURVEILLANCE REQUIREMENTS	ALLOWABLE VALUE
1. Low Set Relief Valves			
a. Reactor Vessel Pressure Setpoint	1 per valve	SR 3.3.6.3.1 SR 3.3.6.3.3	≤ 1110.5 psig
b. Reactuation Time Delay	2 per valve	SR 3.3.6.3.2 SR 3.3.6.3.3	≥ 8.5 seconds and ≤ 11.4 seconds
2. Relief Valves			
a. Reactor Vessel Pressure Setpoint	1 per valve	SR 3.3.6.3.1 SR 3.3.6.3.3	≤ 1133.5 psig

3.3 INSTRUMENTATION

3.3.7.1 Control Room Emergency Ventilation (CREV) System Instrumentation

LC0 3.3.7.1 Two channels of the Reactor Building Ventilation System—High High Radiation Alarm Function shall be OPERABLE.

APPLICABILITY: MODES 1, 2, and 3,
During movement of irradiated fuel assemblies in the secondary containment,
During CORE ALTERATIONS,
During operations with a potential for draining the reactor vessel (OPDRVs).

ACTIONS

-----NOTE-----
Separate Condition entry is allowed for each channel.

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One or more channels inoperable.	A.1 Declare CREV System inoperable.	1 hour from discovery of loss of CREV System Instrumentation alarm capability in both trip systems
	<u>AND</u> A.2 Restore channel to OPERABLE status.	6 hours

(continued)

CONDITION	REQUIRED ACTION	COMPLETION TIME
B. Required Action and associated Completion Time not met.	B.1 Place the CREV System in the isolation/pressurization mode of operation.	1 hour
	<u>OR</u> B.2 Declare CREV System inoperable.	1 hour

SURVEILLANCE REQUIREMENTS

-----NOTE-----

When a channel is placed in an inoperable status solely for performance of required Surveillances, entry into associated Conditions and Required Actions may be delayed for up to 6 hours provided the CREV System Instrumentation alarm capability is maintained.

SURVEILLANCE	FREQUENCY
SR 3.3.7.1.1 Perform CHANNEL CHECK.	12 hours
SR 3.3.7.1.2 Perform CHANNEL FUNCTIONAL TEST.	92 days
SR 3.3.7.1.3 Perform CHANNEL CALIBRATION. The Allowable Value shall be ≤ 14.9 mR/hr.	92 days

3.3 INSTRUMENTATION

3.3.8.1 Loss of Power (LOP) Instrumentation

LC0 3.3.8.1 The LOP instrumentation for each Function in Table 3.3.8.1-1 shall be OPERABLE.

APPLICABILITY: MODES 1, 2, and 3,
When the associated diesel generator is required to be
OPERABLE by LC0 3.8.2, "AC Sources - Shutdown."

ACTIONS

-----NOTE-----
Separate Condition entry is allowed for each channel.

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One or more channels inoperable.	A.1 Place channel in trip.	1 hour
B. Required Action and associated Completion Time not met.	B.1 Declare associated diesel generator (DG) inoperable.	Immediately

SURVEILLANCE REQUIREMENTS

- NOTES-----
1. Refer to Table 3.3.8.1-1 to determine which SRs apply for each LOP Function.
 2. When a channel is placed in an inoperable status solely for performance of required Surveillances, entry into associated Conditions and Required Actions may be delayed for up to 2 hours provided the associated Function maintains LOP initiation capability.
-

SURVEILLANCE	FREQUENCY
SR 3.3.8.1.1 Perform CHANNEL FUNCTIONAL TEST.	18 months
SR 3.3.8.1.2 Perform CHANNEL CALIBRATION.	18 months
SR 3.3.8.1.3 Perform CHANNEL FUNCTIONAL TEST.	24 months
SR 3.3.8.1.4 Perform CHANNEL CALIBRATION.	24 months
SR 3.3.8.1.5 Perform LOGIC SYSTEM FUNCTIONAL TEST.	24 months

Table 3.3.8.1-1 (page 1 of 1)
Loss of Power Instrumentation

FUNCTION	REQUIRED CHANNELS PER BUS	SURVEILLANCE REQUIREMENTS	ALLOWABLE VALUE
1. 4160 V Essential Service System Bus Undervoltage (Loss of Voltage)	2	SR 3.3.8.1.3 SR 3.3.8.1.4 SR 3.3.8.1.5	≥ 2796.85 V and ≤ 3063.20 V
2. 4160 V Essential Service System Bus Undervoltage (Degraded Voltage)			
a. Bus Undervoltage/Time Delay	2	SR 3.3.8.1.1 SR 3.3.8.1.2 SR 3.3.8.1.5	≥ 3861 V and ≤ 3911 V with time delay ≥ 5.7 seconds and ≤ 8.3 seconds
b. Time Delay (No LOCA)	1	SR 3.3.8.1.1 SR 3.3.8.1.2 SR 3.3.8.1.5	≥ 279 seconds and ≤ 321 seconds

3.3 INSTRUMENTATION

3.3.8.2 Reactor Protection System (RPS) Electric Power Monitoring

LC0 3.3.8.2 Two RPS electric power monitoring assemblies shall be OPERABLE for each inservice RPS motor generator set or alternate power supply.

APPLICABILITY: MODES 1 and 2,
MODE 5 with any control rod withdrawn from a core cell
containing one or more fuel assemblies.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One or both inservice power supplies with one electric power monitoring assembly inoperable.	A.1 Remove associated inservice power supply(s) from service.	72 hours
B. One or both inservice power supplies with both electric power monitoring assemblies inoperable.	B.1 Remove associated inservice power supply(s) from service.	1 hour
C. Required Action and associated Completion Time of Condition A or B not met in MODE 1 or 2.	C.1 Be in MODE 3.	12 hours

(continued)

CONDITION	REQUIRED ACTION	COMPLETION TIME
D. Required Action and associated Completion Time of Condition A or B not met in MODE 5 with any control rod withdrawn from a core cell containing one or more fuel assemblies.	D.1 Initiate action to fully insert all insertable control rods in core cells containing one or more fuel assemblies.	Immediately

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
<p>SR 3.3.8.2.1 -----NOTE----- Only required to be performed prior to entering MODE 2 from MODE 3 or 4, when in MODE 4 for ≥ 24 hours. -----</p> <p>Perform CHANNEL FUNCTIONAL TEST.</p>	184 days
<p>SR 3.3.8.2.2 Perform CHANNEL CALIBRATION. The Allowable Values shall be:</p> <p>a. Overvoltage ≤ 128.6 V, with time delay set to ≤ 3.9 seconds.</p> <p>b. Undervoltage ≥ 106.3 V, with time delay set to ≤ 3.9 seconds.</p> <p>c. Underfrequency ≥ 55.7 Hz, with time delay set to ≤ 3.9 seconds.</p>	24 months
SR 3.3.8.2.3 Perform a system functional test.	24 months

3.4 REACTOR COOLANT SYSTEM (RCS)

3.4.1 Recirculation Loops Operating

LCO 3.4.1 Two recirculation loops with matched flows shall be in operation.

OR

One recirculation loop shall be in operation with the following limits applied when the associated LCO is applicable:

- a. LCO 3.2.1, "AVERAGE PLANAR LINEAR HEAT GENERATION RATE (APLHGR)," single loop operation limits specified in the COLR;
- b. LCO 3.2.2, "MINIMUM CRITICAL POWER RATIO (MCPR)," single loop operation limits specified in the COLR;
- c. LCO 3.3.1.1, "Reactor Protection System (RPS) Instrumentation," Function 2.b (Average Power Range Monitors Flow Biased Neutron Flux-High), Allowable Value of Table 3.3.1.1-1 is reset for single loop operation; and
- d. LCO 3.3.2.1, "Control Rod Block Instrumentation," Function 1.a (Rod Block Monitor-Upscale), Allowable Value of Table 3.3.2.1-1 is reset for single loop operation.

APPLICABILITY: MODES 1 and 2.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. No recirculation loops in operation.	A.1 Be in MODE 2.	8 hours
	<u>AND</u>	
	A.2 Be in MODE 3.	12 hours

(continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
B. Recirculation loop flow mismatch not within limits.	B.1 Declare the recirculation loop with lower flow to be "not in operation."	2 hours
C. Requirements of the LCO not met for reasons other than Condition A or B.	C.1 Satisfy the requirements of the LCO.	24 hours
D. Required Action and associated Completion Time of Condition C not met.	D.1 Be in MODE 3.	12 hours

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
<p>SR 3.4.1.1 -----NOTE----- Not required to be performed until 24 hours after both recirculation loops are in operation. -----</p> <p>Verify jet pump loop flow mismatch with both recirculation loops in operation is:</p> <p>a. $\leq 10\%$ of rated core flow when operating at $< 70\%$ of rated core flow; and</p> <p>b. $\leq 5\%$ of rated core flow when operating at $\geq 70\%$ of rated core flow.</p>	24 hours

3.4 REACTOR COOLANT SYSTEM (RCS)

3.4.2 Jet Pumps

LC0 3.4.2 All jet pumps shall be OPERABLE.

APPLICABILITY: MODES 1 and 2.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One or more jet pumps inoperable.	A.1 Be in MODE 3.	12 hours

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
<p>SR 3.4.2.1 -----NOTES-----</p> <ol style="list-style-type: none"> 1. Not required to be performed until 4 hours after associated recirculation loop is in operation. 2. Not required to be performed until 24 hours after > 25% RTP. <p>-----</p> <p>Verify at least one of the following criteria (a or b) is satisfied for each operating recirculation loop:</p> <ol style="list-style-type: none"> a. Recirculation pump flow to speed ratio differs by $\leq 10\%$ from established patterns. b. Each jet pump flow differs by $\leq 10\%$ from established patterns. 	24 hours

3.4 REACTOR COOLANT SYSTEM (RCS)

3.4.3 Safety and Relief Valves

LC0 3.4.3 The safety function of 8 safety valves shall be OPERABLE.

 AND

 The relief function of 5 relief valves shall be OPERABLE.

APPLICABILITY: MODES 1, 2, and 3.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One relief valve inoperable.	A.1 Restore the relief valve to OPERABLE status.	14 days
B. Required Action and associated Completion Time of Condition A not met. <u>OR</u> Two or more relief valves inoperable. <u>OR</u> One or more safety valves inoperable.	B.1 Be in MODE 3. <u>AND</u> B.2 Be in MODE 4.	12 hours 36 hours

SURVEILLANCE REQUIREMENTS

SURVEILLANCE		FREQUENCY
SR 3.4.3.1	Verify the safety function lift setpoints of the safety valves are as follows:	In accordance with the Inservice Testing Program
	<div> <div>Number of Safety Valves</div> <div>Setpoint (psig)</div> </div>	
	2 1240 \pm 12.4	
	2 1250 \pm 12.5	
	4 1260 \pm 12.6	
SR 3.4.3.2	<p>-----NOTE-----</p> <p>Not required to be performed until 12 hours after reactor steam pressure and flow are adequate to perform the test.</p> <p>-----</p> <p>Verify each relief valve opens when manually actuated.</p>	24 months
SR 3.4.3.3	<p>-----NOTE-----</p> <p>Valve actuation may be excluded.</p> <p>-----</p> <p>Verify each relief valve actuates on an actual or simulated automatic initiation signal.</p>	24 months

3.4 REACTOR COOLANT SYSTEM (RCS)

3.4.4 RCS Operational LEAKAGE

LC0 3.4.4 RCS operational LEAKAGE shall be limited to:

- a. No pressure boundary LEAKAGE;
- b. ≤ 5 gpm unidentified LEAKAGE;
- c. ≤ 25 gpm total LEAKAGE averaged over the previous 24 hour period; and
- d. ≤ 2 gpm increase in unidentified LEAKAGE within the previous 24 hour period in MODE 1.

APPLICABILITY: MODES 1, 2, and 3.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
<p>A. Unidentified LEAKAGE not within limit.</p> <p><u>OR</u></p> <p>Total LEAKAGE not within limit.</p>	<p>A.1 Reduce LEAKAGE to within limits.</p>	4 hours
<p>B. Unidentified LEAKAGE increase not within limit.</p>	<p>B.1 Reduce unidentified LEAKAGE increase to within limits.</p> <p><u>OR</u></p>	<p>4 hours</p> <p>(continued)</p>

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
B. (continued)	B.2 Verify source of unidentified LEAKAGE increase is not intergranular stress corrosion cracking susceptible material.	4 hours
C. Required Action and associated Completion Time of Condition A or B not met. <u>OR</u> Pressure boundary LEAKAGE exists.	C.1 Be in MODE 3. <u>AND</u> C.2 Be in MODE 4.	12 hours 36 hours

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
SR 3.4.4.1 Verify RCS unidentified and total LEAKAGE and unidentified LEAKAGE increase are within limits.	12 hours

3.4 REACTOR COOLANT SYSTEM (RCS)

3.4.5 RCS Leakage Detection Instrumentation

LC0 3.4.5 The following RCS leakage detection instrumentation shall be OPERABLE:

- a. Drywell floor drain sump monitoring system; and
- b. Primary containment atmospheric particulate sampling system.

APPLICABILITY: MODES 1, 2, and 3.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. Drywell floor drain sump monitoring system inoperable.	A.1 Restore drywell floor drain sump monitoring system to OPERABLE status.	24 hours
B. Primary containment atmospheric particulate sampling system inoperable.	B.1 Restore primary containment atmospheric particulate sampling system to OPERABLE status.	24 hours
C. Required Action and associated Completion Time not met.	C.1 Be in MODE 3.	12 hours
	<u>AND</u> C.2 Be in MODE 4.	36 hours

SURVEILLANCE REQUIREMENTS

SURVEILLANCE		FREQUENCY
SR 3.4.5.1	Perform primary containment atmospheric particulate sampling.	12 hours
SR 3.4.5.2	Perform a CHANNEL FUNCTIONAL TEST of drywell floor drain sump monitoring system instrumentation.	31 days
SR 3.4.5.3	Perform a CHANNEL CALIBRATION of drywell floor drain sump monitoring system instrumentation.	12 months

3.4 REACTOR COOLANT SYSTEM (RCS)

3.4.6 RCS Specific Activity

LC0 3.4.6 The specific activity of the reactor coolant shall be limited to DOSE EQUIVALENT I-131 specific activity $\leq 0.2 \mu\text{Ci/gm}$.

APPLICABILITY: MODE 1,
MODES 2 and 3 with any main steam line not isolated.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. Reactor coolant specific activity $> 0.2 \mu\text{Ci/gm}$ and $\leq 4.0 \mu\text{Ci/gm}$ DOSE EQUIVALENT I-131.	-----NOTE----- LC0 3.0.4 is not applicable. -----	
	A.1 Determine DOSE EQUIVALENT I-131. <u>AND</u> A.2 Restore DOSE EQUIVALENT I-131 to within limits.	Once per 4 hours 48 hours
B. Required Action and associated Completion Time of Condition A not met. <u>OR</u> Reactor Coolant specific activity $> 4.0 \mu\text{Ci/gm}$ DOSE EQUIVALENT I-131.	B.1 Determine DOSE EQUIVALENT I-131. <u>AND</u>	Once per 4 hours
	B.2.1 Isolate all main steam lines. <u>OR</u>	12 hours (continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
B. (continued)	B.2.2.1 Be in MODE 3.	12 hours
	<u>AND</u> B.2.2.2 Be in MODE 4.	36 hours

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
SR 3.4.6.1 -----NOTE----- Only required to be performed in MODE 1. ----- Verify reactor coolant DOSE EQUIVALENT I-131 specific activity is $\leq 0.2 \mu\text{Ci/gm.}$	7 days

3.4 REACTOR COOLANT SYSTEM (RCS)

3.4.7 Shutdown Cooling (SDC) System—Hot Shutdown

LC0 3.4.7 Two SDC subsystems shall be OPERABLE, and, with no recirculation pump in operation, at least one SDC subsystem shall be in operation.

- NOTES-----
1. Both required SDC subsystems and recirculation pumps may be not in operation for up to 2 hours per 8 hour period.
 2. One required SDC subsystem may be inoperable for up to 2 hours for the performance of Surveillances.
-

APPLICABILITY: MODE 3, with reactor vessel coolant temperature less than the SDC cut-in permissive temperature.

ACTIONS

- NOTES-----
1. LC0 3.0.4 is not applicable.
 2. Separate Condition entry is allowed for each SDC subsystem.
-

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One or two required SDC subsystems inoperable.	A.1 Initiate action to restore required SDC subsystem(s) to OPERABLE status.	Immediately
	<u>AND</u>	(continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. (continued)	A.2 Verify an alternate method of decay heat removal is available for each inoperable required SDC subsystem.	1 hour
	<u>AND</u> A.3 Be in MODE 4.	24 hours
B. No required SDC subsystem in operation. <u>AND</u> No recirculation pump in operation.	B.1 Initiate action to restore one required SDC subsystem or one recirculation pump to operation.	Immediately
	<u>AND</u> B.2 Verify reactor coolant circulation by an alternate method.	1 hour from discovery of no reactor coolant circulation
	<u>AND</u> B.3 Monitor reactor coolant temperature and pressure.	<u>AND</u> Once per 12 hours thereafter
		Once per hour

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
<p>SR 3.4.7.1 -----NOTE----- Not required to be met until 2 hours after reactor vessel coolant temperature is less than the SDC cut-in permissive temperature. -----</p> <p>Verify one SDC subsystem or recirculation pump is operating.</p>	<p>12 hours</p>

3.4 REACTOR COOLANT SYSTEM (RCS)

3.4.8 Shutdown Cooling (SDC) System—Cold Shutdown

LC0 3.4.8 Two SDC subsystems shall be OPERABLE, and, with no recirculation pump in operation, at least one SDC subsystem shall be in operation.

-----NOTES-----

1. Both required SDC subsystems may be not in operation during hydrostatic testing.
 2. Both required SDC subsystems and recirculation pumps may be not in operation for up to 2 hours per 8 hour period.
 3. One required SDC subsystem may be inoperable for up to 2 hours for the performance of Surveillances.
-

APPLICABILITY: MODE 4.

ACTIONS

-----NOTE-----
Separate Condition entry is allowed for each shutdown cooling subsystem.

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One or two required SDC subsystems inoperable.	A.1 Verify an alternate method of decay heat removal is available for each inoperable required SDC subsystem.	1 hour <u>AND</u> Once per 24 hours thereafter

(continued)

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
<p>B. No required SDC subsystem in operation.</p> <p><u>AND</u></p> <p>No recirculation pump in operation.</p>	<p>B.1 Verify reactor coolant circulating by an alternate method.</p> <p><u>AND</u></p> <p>B.2 Monitor reactor coolant temperature and pressure.</p>	<p>1 hour from discovery of no reactor coolant circulation</p> <p><u>AND</u></p> <p>Once per 12 hours thereafter</p> <p>Once per hour</p>

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
<p>SR 3.4.8.1 Verify one SDC subsystem or recirculation pump is operating.</p>	<p>12 hours</p>

3.4 REACTOR COOLANT SYSTEM (RCS)

3.4.9 RCS Pressure and Temperature (P/T) Limits

LCO 3.4.9 RCS pressure, RCS temperature, RCS heatup and cooldown rates, and the recirculation pump starting temperature requirements shall be maintained within limits.

APPLICABILITY: At all times.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
<p>A. -----NOTE----- Required Action A.2 shall be completed if this Condition is entered. ----- Requirements of the LCO not met in MODE 1, 2, or 3.</p>	A.1 Restore parameter(s) to within limits.	30 minutes
	<p><u>AND</u></p> <p>A.2 Determine RCS is acceptable for continued operation.</p>	72 hours
<p>B. Required Action and associated Completion Time of Condition A not met.</p>	B.1 Be in MODE 3.	12 hours
	<p><u>AND</u></p> <p>B.2 Be in MODE 4.</p>	36 hours

(continued)

ACTIONS

ACTIONS		
CONDITION	REQUIRED ACTION	COMPLETION TIME
C. -----NOTE----- Required Action C.2 shall be completed if this Condition is entered. -----	C.1 Initiate action to restore parameter(s) to within limits.	Immediately
	<u>AND</u>	
Requirements of the LCO not met in other than MODES 1, 2, and 3.	C.2 Determine RCS is acceptable for operation.	Prior to entering MODE 2 or 3

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
<p>SR 3.4.9.1 -----NOTE----- Only required to be performed during RCS heatup and cooldown operations and RCS inservice leak and hydrostatic testing. -----</p> <p>Verify:</p> <ul style="list-style-type: none"> a. RCS pressure and RCS temperature are within the applicable limits specified in Figures 3.4.9-1, 3.4.9-2, and 3.4.9-3; b. RCS heatup and cooldown rates are $\leq 100^{\circ}\text{F}$ in any 1 hour period; and c. RCS temperature change during inservice leak and hydrostatic testing is $\leq 20^{\circ}\text{F}$ in any 1 hour period when the RCS temperature and pressure are being maintained within the limits of Figure 3.4.9-1. 	<p>30 minutes</p>
<p>SR 3.4.9.2 Verify RCS pressure and RCS temperature are within the applicable criticality limits specified in Figure 3.4.9-3.</p>	<p>Once within 15 minutes prior to control rod withdrawal for the purpose of achieving criticality</p>

(continued)

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
<p>SR 3.4.9.3 -----NOTE----- Only required to be met in MODES 1, 2, 3, and 4 during recirculation pump startup. -----</p> <p>Verify the difference between the bottom head coolant temperature and the reactor pressure vessel (RPV) coolant temperature is $\leq 145^{\circ}\text{F}$.</p>	<p>Once within 15 minutes prior to each startup of a recirculation pump</p>
<p>SR 3.4.9.4 -----NOTE----- Only required to be met in MODES 1, 2, 3, and 4 during recirculation pump startup. -----</p> <p>Verify the difference between the reactor coolant temperature in the recirculation loop to be started and the RPV coolant temperature is $\leq 50^{\circ}\text{F}$.</p>	<p>Once within 15 minutes prior to each startup of a recirculation pump</p>
<p>SR 3.4.9.5 -----NOTE----- Only required to be performed when tensioning the reactor vessel head bolting studs. -----</p> <p>Verify reactor vessel flange and head flange temperatures are $\geq 83^{\circ}\text{F}$.</p>	<p>30 minutes</p>

(continued)

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
<p>SR 3.4.9.6 -----NOTE----- Not required to be performed until 30 minutes after RCS temperature $\leq 93^{\circ}\text{F}$ in MODE 4. -----</p> <p>Verify reactor vessel flange and head flange temperatures are $\geq 83^{\circ}\text{F}$.</p>	<p>30 minutes</p>
<p>SR 3.4.9.7 -----NOTE----- Not required to be performed until 12 hours after RCS temperature $\leq 113^{\circ}\text{F}$ in MODE 4. -----</p> <p>Verify reactor vessel flange and head flange temperatures are $\geq 83^{\circ}\text{F}$.</p>	<p>12 hours</p>

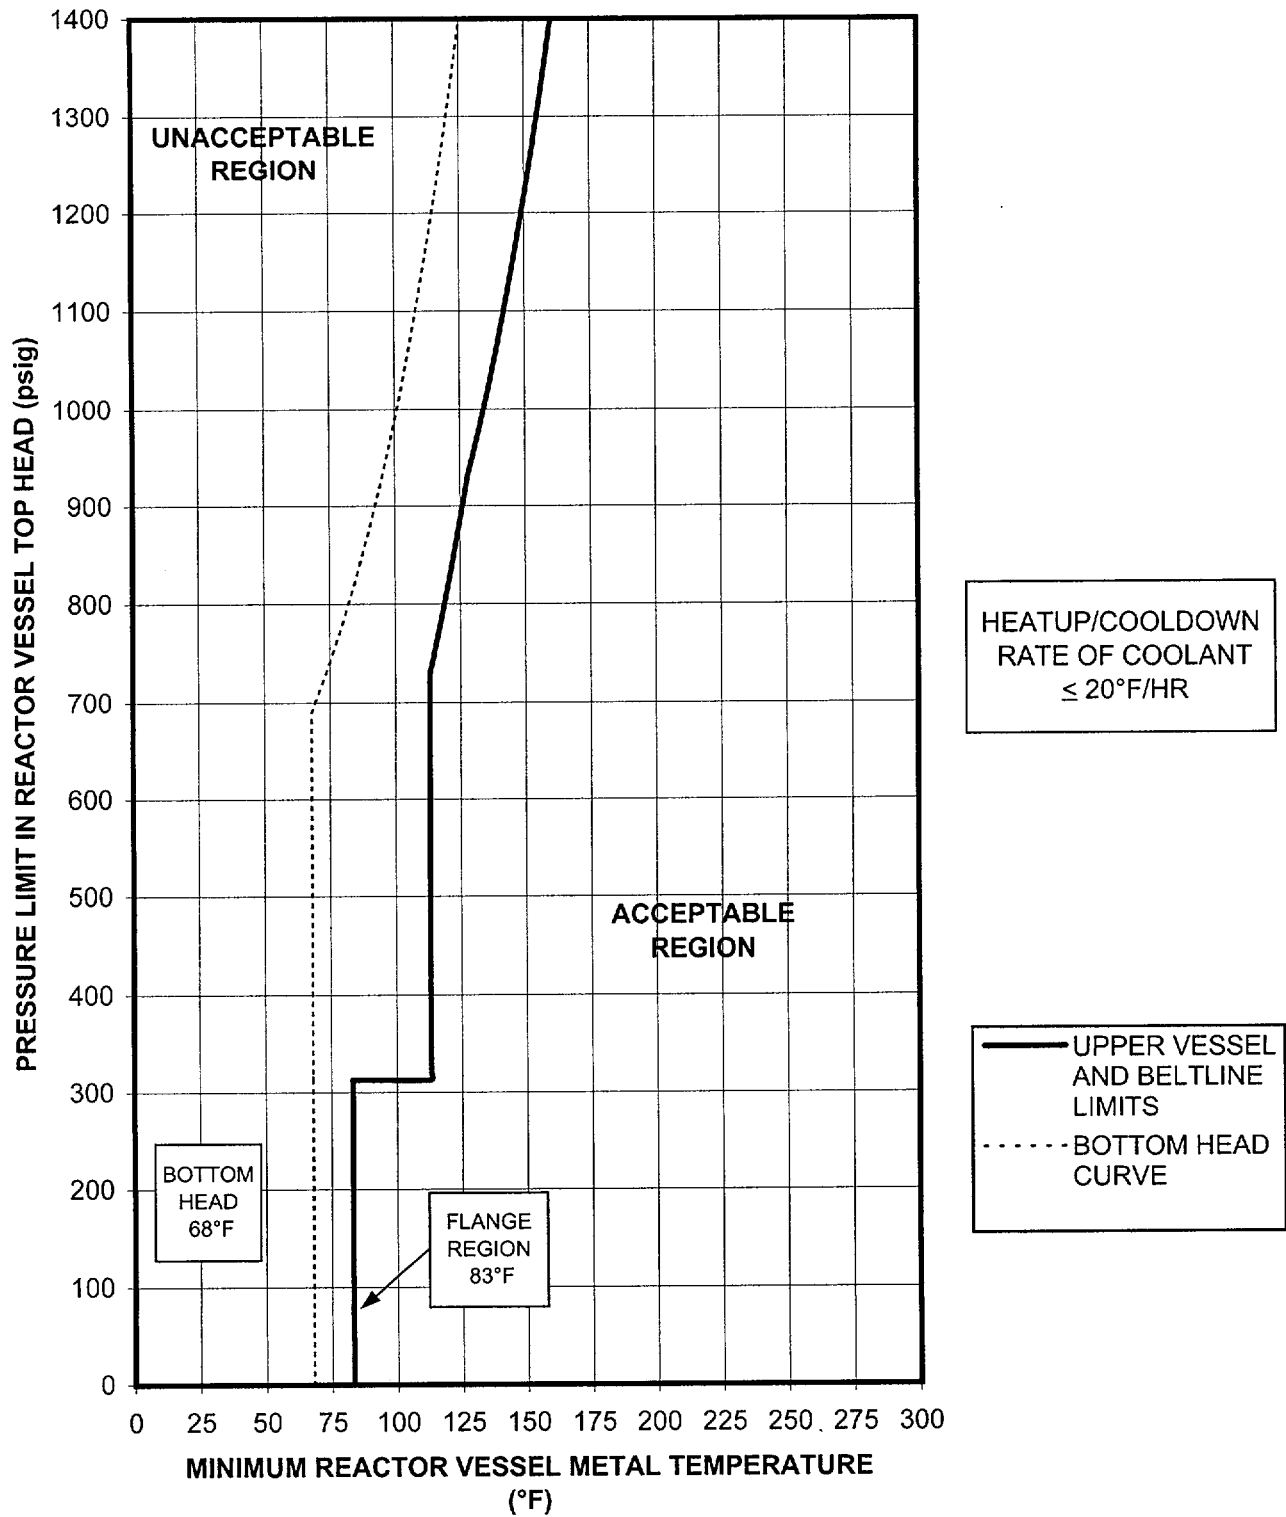


Figure 3.4.9-1 (Page 1 of 1)
Non-Nuclear Inservice Leak and Hydrostatic Testing Curve
(Valid to 32 EFPY)

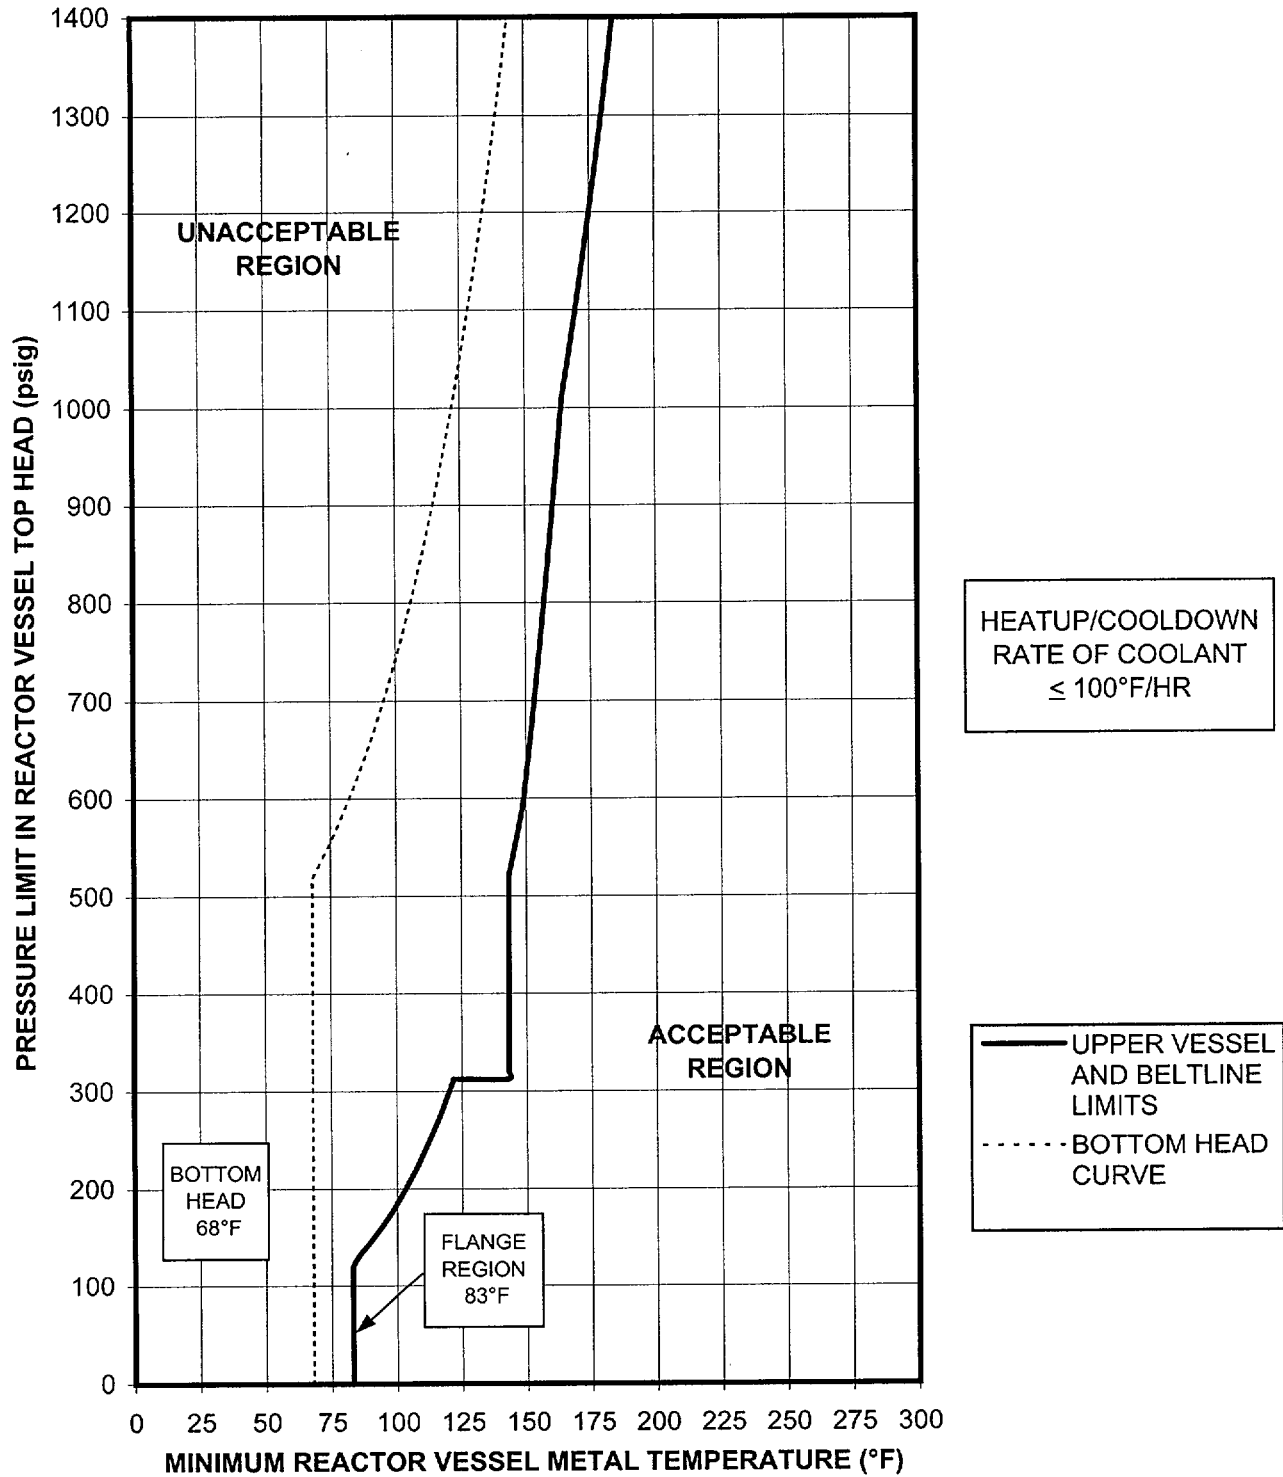


Figure 3.4.9-2 (Page 1 of 1)
Non-Nuclear Heatup/Cooldown Curve
(Valid to 32 EFPY)

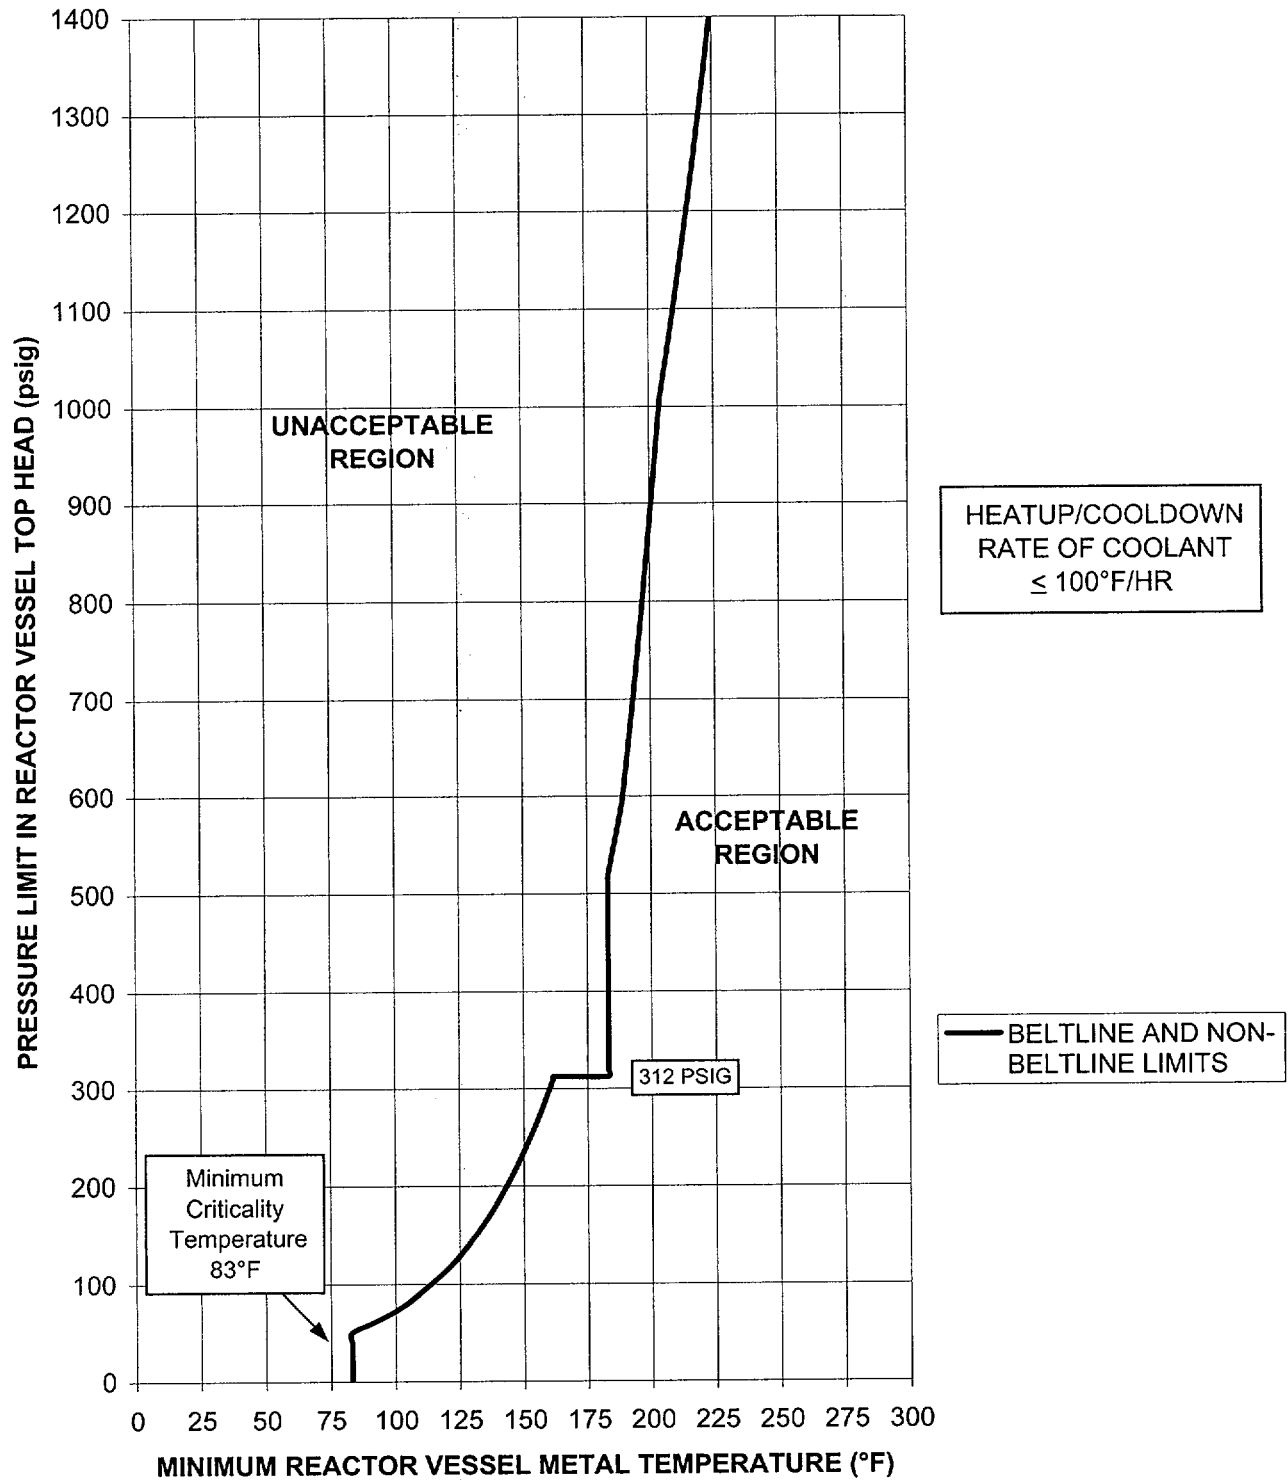


Figure 3.4.9-3 (Page 1 of 1)
Critical Operations Curve
(Valid to 32 EFPY)

3.4 REACTOR COOLANT SYSTEM (RCS)

3.4.10 Reactor Steam Dome Pressure

LC0 3.4.10 The reactor steam dome pressure shall be \leq 1005 psig.

APPLICABILITY: MODES 1 and 2.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. Reactor steam dome pressure not within limit.	A.1 Restore reactor steam dome pressure to within limit.	15 minutes
B. Required Action and associated Completion Time not met.	B.1 Be in MODE 3.	12 hours

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
SR 3.4.10.1 Verify reactor steam dome pressure is \leq 1005 psig.	12 hours