

December 21, 2001  
NG-01-1428

Office of Nuclear Reactor Regulation  
U. S. Nuclear Regulatory Commission  
Attn: Document Control Desk  
Mail Station 0-P1-17  
Washington, DC 20555-0001

Subject: Duane Arnold Energy Center  
Docket No: 50-331  
Op. License No: DPR-49  
Single-Failure-Proof Status of Reactor Building Crane

References: 1. NG-96-1035, dated May 10, 1996, from J. Franz to NRC; IES Response to NRC Bulletin 96-02: Movement of Heavy Loads Over Spent Fuel, Over Fuel in the Reactor Core, or Over Safety-Related Equipment  
2. Letter dated August 3, 2001, from B. Mozafari (NRC) to G. Van Middlesworth (NMC); Duane Arnold Energy Center - Single-Failure-Proof Status of Reactor Building Crane  
3. NG-01-1029, dated August 31, 2001, from G. Van Middlesworth to NRC; Single-Failure-Proof Status of Reactor Building Crane

File: A-101a, T-31, SPF-164

In April of 1996, the NRC issued Bulletin 96-02, "Movement of Heavy Loads Over Spent Fuel, Over Fuel in the Reactor Core, or Over Safety-Related Equipment." The Bulletin requested that licensees review plans and capabilities for handling heavy loads while the reactor is at power in accordance with existing regulatory guidelines and licensing basis. The Duane Arnold Energy Center's (DAEC's) response to Bulletin 96-02 was provided by letter dated May 10, 1996 (Reference 1).

As discussed in that letter, the DAEC's review identified an issue involving the single-failure-proof status of the reactor building crane. As described in more detail in Attachment 1, when the reactor building crane was upgraded in 1985, the NRC did not review the seismic analysis which was performed to verify that the crane would be capable of safely supporting its rated load during a seismic event.

By letter dated August 3, 2001 (Reference 2), the Staff requested that Nuclear Management Company, LLC (NMC) revise the DAEC Updated Final Safety Analysis Report (UFSAR) to clarify that the NRC had not endorsed the crane as single-failure-proof. The DAEC UFSAR was revised accordingly (Reference 3).

A001

December 21, 2001

NG-01-1428


Page 2

It is desirable to resolve the single-failure-proof status of the DAEC reactor building crane well in advance of the implementation of dry spent fuel storage, currently anticipated in the Summer of 2003. In support of anticipated heavy load handling, additional seismic calculations have been performed regarding the reactor building crane. A summary of the assumptions and conclusions of these calculations is provided in Attachment 1. Attachment 2 contains portions of the seismic analysis for the Staff's review, as well as the "Static Load Test Procedure for New Reactor Building Crane," dated December 4, 1984.

NMC requests the Staff's review and approval of the seismic analysis prior to December 31, 2002, so that this issue may be resolved prior to implementation of dry spent fuel storage. Upon approval of the seismic analysis by the NRC, NMC will revise the DAEC UFSAR to reflect the Staff's review.

Should you have any questions regarding this matter, please contact this office.

Sincerely,

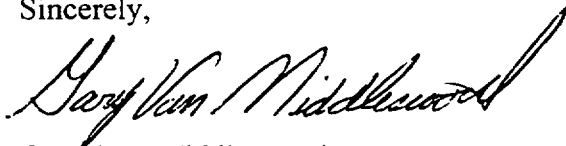

Gary Van Middlesworth  
DAEC Site Vice President

Attachments: 1. Summary of Analysis  
2. Portions of Calculations and Static Load Test Procedure

cc: T. Vine  
C. Rushworth  
R. Anderson (NMC)  
B. Mozafari (NRC-NRR)  
J. Dyer (Region III)  
NRC Resident Office  
DOCU

### Summary of Analysis

In 1985, the DAEC reactor building crane was modified under 10 CFR 50.59. A new Ederer single-failure-proof crane trolley and main hoist system meeting the guidelines of Regulatory Guide 1.104, "Overhead Crane Handling Systems for Nuclear Power Plants," and NUREG-0554, "Single Failure Proof Cranes for Nuclear Power Plants," was installed. The design of the Ederer hoist and trolley system was evaluated in a Staff Safety Evaluation Report (SER) of the Generic Licensing Topical Report EDR-1, Rev. 3, for Ederer's Nuclear Safety-Related Extra Safety and Monitoring (X-SAM) Cranes, dated August 3, 1983.

The trolley system was installed on the existing bridge; the bridge itself was not replaced. A seismic analysis was performed to verify that the reactor building overhead crane would be capable of safely supporting its rated load during a seismic event after installation of the new, heavier, single-failure-proof trolley. This calculation concluded that the combined vertical and horizontal stresses developed in an operational basis earthquake (OBE) and a design basis earthquake (DBE) are within the allowable stress limits defined in Crane Manufacturers Association of America (CMAA) 70 - 1975 (Specification for Electric Overhead Traveling Cranes). This analysis was not reviewed by the NRC.

### Calculation for Reactor Building Crane Girders

The purpose of the calculation is to check the design of the reactor building crane girders for the increased loadings imposed by the trolley upgrade. The calculation utilizes standard engineering practice and follows analysis methods described in previous DAEC calculations. Conservative inputs and assumptions are used throughout this calculation. Specific assumptions include:

- CMAA #70 1975 edition was used.
- UFSAR earthquake accelerations are used for the reactor building and runway.
- Vertical accelerations of 0.09g OBE and 0.18g DBE are used. The vertical seismic load combinations include the weight of the crane and the lifted load (100 tons).
- The horizontal accelerations used were 0.60g OBE and 1.20g DBE at the crane level. The lifted load and lower load block are assumed to be decoupled from the bridge and trolley with respect to horizontal earthquake accelerations.

The new analysis concluded that the existing crane girders are adequate. The girder combined stresses were shown to be less than allowable stresses. Deflections are less than allowable. Wheel loads are higher than recommended, possibly increasing wheel wear by a small amount; however, this is judged to be acceptable given the number of maximum rated lifts over the remaining plant life. Diaphragm spacing is greater than recommended (because of the increased trolley wheel loads), but is acceptable by similar reasoning to the wheel loads above. End truck stresses are less than allowable. The girder to end truck connections are acceptable.

### Calculation for Reactor Building Structure

The purpose of this calculation is to check the design of the reactor building structure for the new loadings imposed by the 100 ton capacity single-failure-proof reactor building crane. The calculation also evaluates the design condition of maximum lifted loads during a seismic event. The calculation utilizes standard engineering practice and follows analysis methods described in previous DAEC calculations. Conservative inputs and assumptions are used throughout this calculation. Specific assumptions include:

- Vertical accelerations of 0.04g OBE and 0.08g DBE are used. The vertical seismic load combinations include the weight of the crane and the lifted load (100 tons).
- The horizontal accelerations used were 0.35g OBE and .70g DBE at the crane level and .52g OBE and 1.04g DBE at the roof level. The lifted load and lower load block are assumed to be decoupled from the bridge and trolley with respect to horizontal earthquake accelerations.

The analysis concluded that the existing crane runway girders and rigid frame are adequate. The reactor building crane support structure is adequately designed for the increased weight of the replacement trolley and for all appropriate load combinations, including maximum lifted load plus seismic.

Attachment 2  
to NG-01-1428

Portions of Calculations  
and Static Load Test Procedure

DOCUMENT NUMBER: CAL-M01-273




Title : REACTOR BUILDING CRANE GIRDER CHECK

## Contents :

[illegible]

STONE & WEBSTER ENGINEERING CORPORATION

# CALCULATION TITLE PAGE

CLIENT & PROJECT UNIT NO. 1		DAEC - DUANE ARNOLD ENERGY CENTER -		PAGE 1 OF 21	
CALCULATION TITLE (Indicative of Objective):  REACTOR BUILDING CRANE GIRDER CHECK				QA CATEGORY <input type="checkbox"/> <input checked="" type="checkbox"/> - I Nuclear Safety Related <input type="checkbox"/> - II <input type="checkbox"/> - III <input type="checkbox"/> - Non-Safety Related <input type="checkbox"/> - Fossil/Industrial Plant	
CALCULATION IDENTIFICATION NUMBER					
J.O. or W.O. NO.	DIVISION & GROUP	CURRENT CALC NO.	OPTIONAL TASK CODE	OPTIONAL WORK PACKAGE NO.	
12133	CIVIL/STRUCT	12133-SS-3	N/A	N/A	
APPROVALS - SIGNATURE & DATE			REV. NO. OR NEW CALC. NO.	SUPERCEDES CALC. NO. OR REV. NO.	CONFIRMATION REQUIRED <input type="checkbox"/>
PREPARER(S)/DATE(S)	REVIEWER(S)/DATE(S)	INDEPENDENT REVIEWER(S)/DATE(S)			YES
D.M. HERMANN 10/8/2001 	R. MA 10/8/2001 	J.E. Greer 10/8/2001 	0		<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO
					<input type="checkbox"/> YES <input type="checkbox"/> NO
					<input type="checkbox"/> YES <input type="checkbox"/> NO
					<input type="checkbox"/> YES <input type="checkbox"/> NO
					<input type="checkbox"/> YES <input type="checkbox"/> NO
					<input type="checkbox"/> YES <input type="checkbox"/> NO
					<input type="checkbox"/> YES <input type="checkbox"/> NO
DISTRIBUTION					
GROUP	NAME & LOCATION	COPY SENT	GROUP	NAME & LOCATION	COPY SENT
Records Mgmt	Job Book	<input type="checkbox"/>			<input type="checkbox"/>
Fire File	Fire File	<input type="checkbox"/>			<input type="checkbox"/>
PROJECT FILE		<input type="checkbox"/>			<input type="checkbox"/>
		<input type="checkbox"/>			<input type="checkbox"/>
		<input type="checkbox"/>			<input type="checkbox"/>

**CALCULATION SHEET**

CALCULATION IDENTIFICATION NUMBER				PAGE 2 Rev. 0
J.O. OR W.O. NO. 12133	DIVISION & GROUP CIVIL/STRUCT	CALCULATION NO. 12133-SS-3	OPTIONAL TASK CODE N/A	

TABLE OF CONTENTS

<u>Section/Title</u>	<u>Page</u>
TITLE PAGE.....	1
TABLE OF CONTENTS.....	2
RECORD OF CHANGES.....	3
1. OBJECTIVE OF CALCULATION.....	4
2. CALCULATION METHODS/ASSUMPTIONS .....	4
3. SOURCES OF DATA/EQUATIONS.....	5
4. CONCLUSIONS .....	5
5. REFERENCES .....	5
6. DESIGN BASIS AND ASSUMPTIONS .....	6
7. ANALYSIS .....	7

Attachments

1. EDERER TROLLEY WHEEL LOAD DISTRIBUTION
2. CENTERLINE GIRDER LOAD IDENTIFICATION
3. DAEC REACTOR BUILDING CRANE OPERATING INSTRUCTIONS
4. MHE (S. PARKHURST) REVIEW OF MAX. WHEEL LOADS



STONE & WEBSTER ENGINEERING CORPORATION

**CALCULATION SHEET**

CALCULATION IDENTIFICATION NUMBER				PAGE 3 Rev. 0
J.O. OR W.O. NO. 12133	DIVISION & GROUP CIVIL/STRUCT	CALCULATION NO. 12133-SS-3	OPTIONAL TASK CODE N/A	

**Record of Changes**

Rev. No.	Description Of Changes	Pages Revised	Pages Added	Pages Replaced

**CALCULATION SHEET**

CALCULATION IDENTIFICATION NUMBER				PAGE 4 Rev. 0
J.O. OR W.O. NO. 12133	DIVISION & GROUP CIVIL/STRUCT	CALCULATION NO. 12133-SS-3	OPTIONAL TASK CODE N/A	

**1. OBJECTIVE OF CALCULATION**

The purpose of this calculation is to check the design of the Reactor Building crane girders for the increased loadings imposed by the trolley upgrade installed in 1984. The upgrade replaced the original P&H Harnischfeger trolley with an Ederer XSAM single-failure-proof trolley, which weighs 20,800 pounds more than the original trolley. The original P&H trolley weighed 65,100 pounds (Ref. #3, pg. 11). S&W Report No. 12133.1004-S(C)-1, Rev. 1 (Ref. #1) reported a trolley weight of 82,000 pounds (an increase of 17,000 pounds), as indicated in several DAEC calculations. However Attachment #1 and Ederer Drawing A13151 indicate an as-built trolley weight of 85,898 pounds as used in this calculation, for an increase of 20,800 pounds from the P&H trolley.

The calculation is a follow-up effort to the S&W Report No. 12133.1004-S(C)-1, Rev. 1 (Ref. #1). The calculation provides a new and more detailed study of the structural adequacy of the Reactor Building crane girders for the increased weight (21 kips) of the trolley. The calculation also evaluates the design condition of maximum lifted loads during a seismic event.

The following specific points will be addressed by this calculation:

- Design check of crane girders (including rail) using increased trolley load of 20,800 lbs.
- Design check using revised trolley wheelbase geometry
- Design check for unequal wheel loads
- Design check for locations of wheel loads at worst-case positions along the girder
- Design check of welds at girder web to flanges
- Design check of diaphragms and stiffeners
- Provide reference to seismic documentation (UFSAR and specifications) in calculation

**2. CALCULATION METHODS/ASSUMPTIONS**

The calculation utilizes standard engineering practice and follows analysis methods described in previous DAEC calculations. Conservative inputs and assumptions are used throughout this calculation. Specific assumptions are identified below:

- CMAA #70 1975 edition (Ref. #12) is to be used
- Vertical earthquake accelerations include the lifted load and the hook
- Horizontal earthquake accelerations exclude the lifted load and the hook
- The earthquake accelerations to be used are from References #14 & #15 and are specific to the crane girder. The UFSAR (Ref. #2) accelerations are used for the reactor building and runway only

**CALCULATION SHEET**

CALCULATION IDENTIFICATION NUMBER				PAGE 5 Rev. 0
J.O. OR W.O. NO. 12133	DIVISION & GROUP CIVIL/STRUCT	CALCULATION NO. 12133-SS-3	OPTIONAL TASK CODE N/A	

**3. SOURCES OF DATA/EQUATIONS**

Vertical impact is 15% of the rated load. Lateral loads are 2½% of live & dead loads. Deflection allowance is 0.00125 inches per inch of span.

The list of references used in this calculation is shown below in Section 5. This calculation uses vertical accelerations of 0.09g OBE and 0.18g DBE (Ref. #14 & #15). The vertical seismic load combinations include the weight of the crane and lifted load. The horizontal accelerations used were 0.60g OBE and 1.20g DBE at the crane level. Horizontal seismic loads include only the dead loads of the trolley and girders (i.e., not the lifted load or hook). The lifted load and hook in horizontal seismic load combinations are typically not included since they are free to sway.

**4. CONCLUSIONS**

The analysis of the existing crane girders were shown to be adequate as designed. The girder combined stresses were shown to be less than allowable stresses (see page 13). Deflections are less than allowable (see page 19). Wheel loads are greater than recommended, possibly increasing wheel wear by a minor amount. This is judged to be acceptable given the number of maximum rated lifts over the remaining plant life (see page 19). Diaphragm spacing is greater than recommended and diaphragm thickness is less than allowable (both because of the increased trolley wheel loads), but both are acceptable (see page 16) by similar reasoning to the wheel loads above. End truck stresses are less than allowable (see pages 20 & 21). The girder to end truck connections are acceptable.

**5. REFERENCES**

1. *Phase I Structural Evaluation Report for DEAC Reactor Building Crane Bridge Girders*. Duane Arnold Energy Center, 12133.1004-S(C)-1, Rev. 0, dated 06/04/01
2. DAEC UFSAR, Sections 2.5 Rev. 14, 3.7 Rev 14 and 3.8, Rev. 12
3. Bechtel DAEC Calculation 3-F-6, Rev. 0, dated 05/08/70, Crane Frame (Space Frame) Reactor Building
4. P&H DAEC Calculation M-023-051, Rev. 3, dated 11/14/84, Reactor Building Crane
5. Iowa Electric Light and Power Company DAEC Calculation C-85-19, Rev. 0, dated 07/18/85, Static Seismic Analysis of Rx Bldg. Overhead Crane
6. Iowa Electric Light and Power Company DAEC Calculation C-87-14, Rev. 0, dated 12/04/87, Girder Loading for Rx Bldg. Crane
7. Bechtel DAEC Drawing C-437, Rev. 4, R.B. Craneway Plan & Details
8. P&H Drawing 28A11849, sheets 1 & 2, dated 02/23/71
9. P&H Drawing 105A3310, Rev C (M-23-97 Sheets 1&2)
10. P&H Drawing 31A5826-5, Rev A (M23-98-1)
11. American Institute of Steel Construction *Manual of Steel Construction*. Allowable Stress Design, 9<sup>th</sup> edition
12. Crane Manufacturers Association of America CMAA Specification #70, 1975
13. John A. Blume & Associates Report DAEC Reactor Building Earthquake Analysis APED-A61-047, Rev. 1

**CALCULATION SHEET**

CALCULATION IDENTIFICATION NUMBER				PAGE 6 Rev. 0
J.O. OR W.O. NO. 12133	DIVISION & GROUP CIVIL/STRUCT	CALCULATION NO. 12133-SS-3	OPTIONAL TASK CODE N/A	

14. DAEC *Specification 7884-M-23A*, Rev. #2 (BECH-MRS-M23A), Technical Specification for the Modification to the Reactor Building Crane
15. DAEC *Specification 7884-M-23.1*, Specific Conditions for Reactor Building Crane Modifications (Engineering Only)
16. Omar Blodgett *Design of Welded Structures*, 1966
17. William Weaver, *Whiting Crane Handbook*, 1979
18. P&H *Drawing 29E5472*, Rev A

**6. DESIGN BASIS AND ASSUMPTIONS**

1. Design method in general is based upon existing calculations (Ref. #4, #5 and #6) with allowable stresses from CMAA #70 (Ref. #12).
2. OBE and DBE design earthquake accelerations based on References #14 and #15, and are specific to the crane girders.
3. Impact is taken as 15% of rated capacity.
4. Lateral load is 2.5% of live load and crane bridge.
5. Trolley load distribution is based upon email dated 07/28/01 from Jim Nelson of Ederer to Stephen Parkhurst, Crane & Equipment Handling Specialist (Attachment #1 to this calculation).
6. E-60xx electrodes used for welding.

STONE & WEBSTER ENGINEERING CORPORATION

**CALCULATION SHEET**

CALCULATION IDENTIFICATION NUMBER				PAGE 7 Rev. 0
J.O. OR W.O. NO. 12133	DIVISION & GROUP CIVIL/STRUCT	CALCULATION NO. 12133-SS-3	OPTIONAL TASK CODE <i>N/A</i>	

**7. Analysis**

# CALCULATION SHEET

STONE & WEBSTER, INC.

J.O./W.O./CALCULATION NO.

12133.1004 SS-E

REVISION

0

PAGE

2

45010 61

PREPARED BY/DATE

DWH 9/11/2001

REVIEWER/CHECKER/DATE

11/2/01

INDEPENDENT REVIEWER/DATE

10-02-01

SUBJECT/TITLE

DAEC CRANE GIRDER CHECK

QA CATEGORY/CODE CLASS

I

DETERMINE SECTION PROPERTIES (MIDSPAN)

$$I_z = \frac{b(d^3 - d_1^3)}{12} + 2 \left( \frac{bd^2}{12} \right)$$

$$= \frac{40(102.5^3 - 100^3)}{12} + \frac{2 \left( \frac{36(100)^3}{12} \right)}{6}$$


$$I_z = 318,802 \text{ in}^4$$

$$S_z = 318,802 \times \frac{2}{102.5} = 6221 \text{ in}^3$$

$$I_y = \frac{100(36.75^3 - 36^3)}{12} + \frac{1.25(40)^3}{6}$$

$$I_y = 38,143 \text{ in}^4$$

$$S_y = 38,143 \times \frac{2}{40} = 1907 \text{ in}^3$$

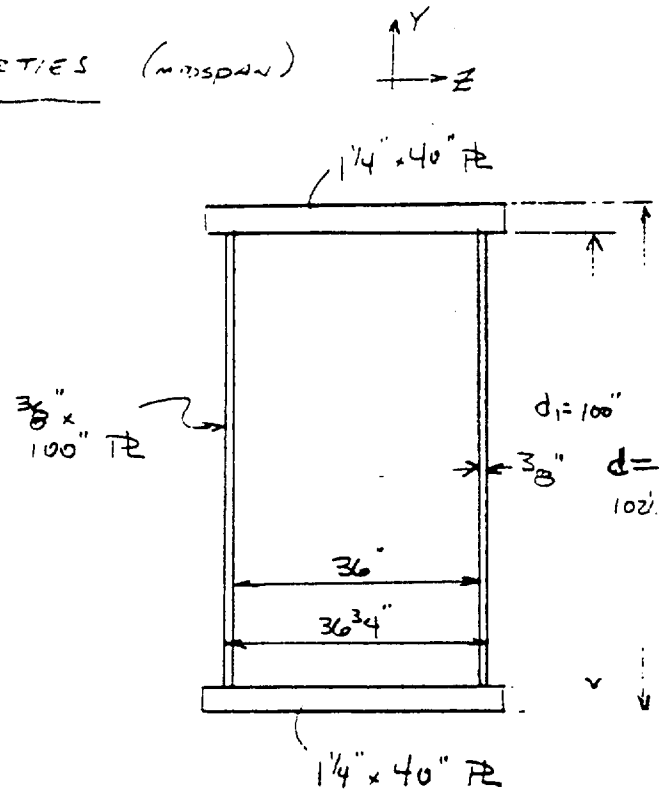

SECTION 2 END

(REF # 8)

# CALCULATION SHEET

STONE & WEBSTER, INC.

AS010 61

J.O./W.O./CALCULATION NO. 12133 - 55-3		REVISION 0	PAGE 9
PREPARED/DATE T.M.H. 9/11/2001	REVIEWER/CHECKER/DATE J.L. 10/2/2001	INDEPENDENT REVIEWER/DATE X 10-02-01	
SUBJECT/TITLE D.A.E.C. Bridge		QA CATEGORY/CODE CLASS 1	

## DETERMINE MOMENTS

### GIRDER DL

GIRDER = 78.4K  
 RAILROAD = 10.3  
 MACHINERY = 4.5  
 MISC = 2.0

$$95.6K \Rightarrow \text{UNIFORM LOAD} = \frac{95.6K}{97'} = .986 K/ft$$

ADD'L & LOAD = 0.2K (1.5 ton Hoist @ 1') (SEE ATTACH. #2)

### TROLLEY & LIFTED LOAD (ATT #1)


Worst Case GIRDER IS G1 (NORTH) (REF # 5 & 6)

WHEEL LOADS ARE 78.4K NORTHWEST } WHEELS INCLUDE  
 65.9K NORTHEAST } LL & Hook (8K)

Wheelbase = 10'

$$\text{C.G. @ } \frac{78.4K \times 10'}{78.4K + 65.9K} = 5.43' \text{ from east wheel}$$

Worst Case BENDING DUE to TROLLEY/LL IS WHEN C.G. & LARGEST WHEEL LOAD ARE PLACED SYMMETRIC ABOUT & GIRDER

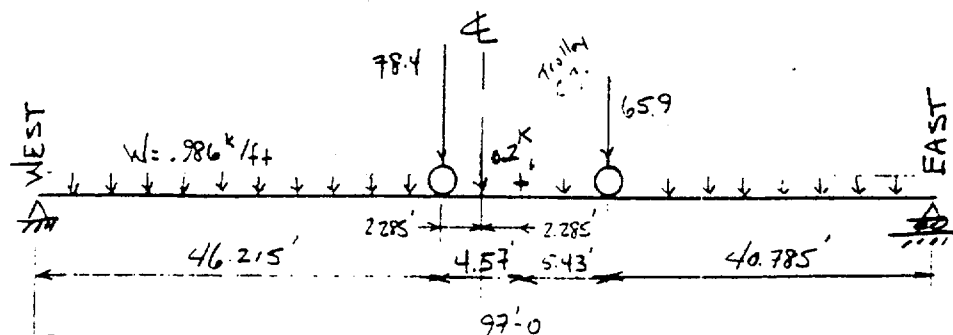

# CALCULATION SHEET

STONE & WEBSTER, INC.

AS010 61

J.O./W.O./CALCULATION NO.

12132-20-E

REVISION

0

PAGE

10

PREPARED/DATE

10-02-01

REVIEWER/CHECKER/DATE

10-02-01

INDEPENDENT REVIEWER/DATE

10-02-01

SUBJECT/TITLE

TRUCK LIFT CHECK

QA CATEGORY/CODE CLASS

1

MAX. MOMENT DUE TO LL & DL OCCURS @ 46.22' (BELOW WHEEL)

$$M_{DL} = \frac{P_x}{2} + \frac{Wx}{2} (l-x) \quad \text{where } x = 46.22'$$

$$= \frac{0.2 \times 46.22}{2} + \frac{.986 (97 - 46.22) 46.22}{2}$$

$$M_{DL} = 1162 \text{ K-FT}$$

$$M_{LL} = \left[ \frac{P_1 (l-a)}{l} + \frac{P_2 b}{l} \right] a$$

$$M_{LL} = 3178 \text{ K-FT}$$

(TROLLEY + LL)

$$a = 46.215'$$

$$b = 40.785'$$

$$l = 97'$$

$$P_1 = 78.4 \text{ K}$$

$$P_2 = 65.9 \text{ K}$$

TROLLEY DL + LL  
WHEEL LOADS

$$M_{\text{TROLLEY ONLY}} = 908.9 \text{ K-FT}$$

$$P_0 = 78.4 \text{ K} - 50 \text{ K} - 2 \text{ K} = 26.4 \text{ K}$$

(LL Hook)

TROLLEY  
DL ONLY  
WHEEL  
LOADS

$$M_{\text{LIFT ONLY}} = 3178 - 908.9 = 2269 \text{ K-FT}$$

$$P_2 = 65.9 - 52 = 13.9 \text{ K}$$

$$M_{\text{IMPACT}} = 15\% \text{ OF RATED CAPACITY}$$

$$= .15 \times 2269 = 340.4 \text{ K-FT}$$

$$M_{\text{LATERAL}} = 2\frac{1}{2}\% (LL + DL) = .025 (3178 + 1162) = 108.5$$

OBE ACCEL. (Ref #14) Horiz = 0.60g

VERT = 0.09g

DBE ACCEL

Horiz = 1.2g

VERT = 0.18g



# CALCULATION SHEET

STONE & WEBSTER, INC.

45010 61

J.O./W.O./CALCULATION NO. 1162-378		REVISION 0	PAGE 11
PREPARED/DATE W.H. 7/1/71	REVIEWER/CHECKER/DATE R.L. 7/1/71	INDEPENDENT REVIEWER/DATE Y.G. 10-02-01	
SUBJECT/TITLE WEC		QA CATEGORY/ CODE CLASS 1	

$$(M_{OBE})_{VERT} [INCLUDES VERT. LOAD] = 0.09(1162 + 378) \underline{390.6 \times ft}$$

$$(M_{OBE})_{HORIZ} [NEGLECTS LIFT] = 0.60(1162 + 908.9) = \underline{1243 \times ft}$$

$$(M_{DBE})_{VERT} = 0.18(1162 + 378) = \underline{781.2 \times ft}$$

$$(M_{DBE})_{HORIZ} = 1.2(1162 + 908.9) \underline{2485 \times ft}$$

# CALCULATION SHEET

STONE & WEBSTER, INC

AS010 61

J.O./W.O./CALCULATION NO.

7133-55-3

REVISION

0

PAGE

12

PREPARED/DATE

Jim 9/12/2001

REVIEWER/CHECKER/DATE

11/27/01

INDEPENDENT REVIEWER/DATE

10-02-01

SUBJECT/TITLE

PAF PAIR 1000

QA CATEGORY/CODE CLASS

1

## DETERMINE STRESSES

$$\sigma_a = \frac{1162 \times 12}{6221} = 2.24 \text{ KSI}$$

$$\sigma_u = \frac{3178 \times 12}{6221} = 6.13 \text{ KSI}$$

$$\sigma_{TOLLEY} = \frac{918.9 \times 12}{6221} = 1.75 \text{ KSI}$$

$$\sigma_{LOAD ONLY} = \frac{2269 \times 12}{6221} = 4.38 \text{ KSI}$$

$$\sigma_{IMPACT} = \frac{340.4 \times 12}{6221} = 0.66 \text{ KSI}$$

$$\sigma_{LATERAL} = \frac{108.5 \times 12}{1907} = 0.68 \text{ KSI}$$

$$\sigma_{OBE-V} = \frac{320.6 \times 12}{6221} = 0.75 \text{ KSI}$$

$$\sigma_{OBE-H} = \frac{1243 \times 12}{1907} = 7.72 \text{ KSI}$$

$$\sigma_{DBE-V} = \frac{781.2 \times 12}{6221} = 1.51 \text{ KSI}$$

$$\sigma_{DBE-H} = \frac{2485 \times 12}{1907} = 15.64 \text{ KSI}$$

# CALCULATION SHEET

STONE & WEBSTER, INC.

ASQ10.61

J.O./W.O./CALCULATION NO. JEE SS-E		REVISION 0	PAGE 13
PREPARED/DATE JAH 9/18/2001	REVIEWER/CHECKER/DATE K. J. H. 09/12/2001	INDEPENDENT REVIEWER/DATE X 10-02-01	
SUBJECT/TITLE JEE CRANE GARDEN			QA CATEGORY/CODE CLASS 1

## DETERMINE COMBINATIONS

(REF #14515) DL + LL + OBE ≤ WORKING STRESSES LOAD CASE #

DL + LL + DBE ≤ 150% WORKING STRESSES L.C. #4

(REF #1254) DL + LL + IMPACT ≤ WORKING STRESSES L.C. #1

DL + LL + LATERAL ≤ WORKING STRESSES L.C. #2

## ALLOWABLE STRESSES

WORKING STRESS (REF #12) : 17.6 ksi TENSION

Sect. 3.3.3.1.3  $b/c \leq 38$   $b = \text{DIST. BTW WEB} = 36"$

$$b/c = 28.8 < 38$$

$C = \text{THICKNESS FLANGE}$   
 $= 1.25"$

$$\therefore f_c = 17.6 \text{ ksi}$$

$$\text{SHEAR} = 13.2 \text{ ksi}$$

$$\text{BEARING} = 26.4 \text{ ksi}$$

$$\text{L.C. \#1} \quad 2.24 + 6.13 + 0.66 = 9.03 \text{ ksi} < 17.6 \text{ ksi} \quad \text{OK}$$

$$\text{L.C. \#2} \quad 2.24 + 6.13 + 0.68 = 9.05 \text{ ksi} < 17.6 \quad \text{OK}$$

$$\text{L.C. \#3} \quad 2.24 + 6.13 + 0.75 + 7.82 = 16.94 \text{ ksi} < 17.6 \quad \text{OK}$$

$$\text{LC \#4} \quad 2.24 + 6.13 + 1.51 + 15.64 = 25.52 \text{ ksi} < 17.6 \times 1.5 = 26.4 \quad \text{OK}$$

# CALCULATION SHEET

STONE & WEBSTER, INC.

45010 61

J.O./W.O./CALCULATION NO. 12133-55-3		REVISION C	PAGE 16
PREPARED/DATE TUM 7/12/2001	REVIEWER/CHECKER/DATE K... 7/12/2001	INDEPENDENT REVIEWER/DATE X... 10-02-01	
SUBJECT/TITLE DHEC ...			QA CATEGORY/CODE CLASS 1

DIAPHRAGM & VERTICAL STIFFENING

Ref: 2 Sect. 3.3.3.14 &

#17 Pg 89

SPACING BTW DIA.  $S = \frac{108,000}{W}$

S = SECTION MODULUS of 12 RAIL (in<sup>3</sup>)

W = wheel load, (LBS.) [NO IMPACT]

135 LB RAIL,  $S = 17.3 \text{ in}^3$

W = 78,400 LB

Spacing  $S = 23.8"$  ACTUAL SPACING APPROX. 24"

OK, SINCE APPROX FORM BY ENGINEERING JUDGMENT

NOTE: DIA. SPACING IS 24" MAX. MUST BE LESS.

THICKNESS of DIA. SUFFICIENT TO RESIST WHEEL IN BENDING @ 26.4 KSI


$26.4 \text{ KSI} \geq \frac{78.4 \text{ K}}{t \times (5\frac{3}{16} + 2 \times 1\frac{1}{4})}$

$t \geq \frac{78.4}{26.4 \times 7\frac{1}{16}} = 0.386"$

Actual  $t = \frac{3}{16}"$

THICKNESS UNDER =  $\frac{.386 - .375}{.375} = 2.9\%$

SAY OK, SEE BELOW.

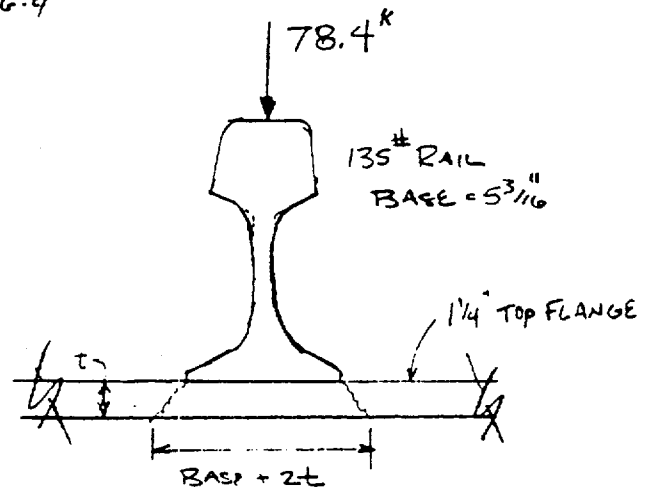

Actual BRG STRESS =  $\frac{78.4}{.375 (5\frac{3}{16} + 2 \times 1\frac{1}{4})} = 27.19 \text{ KSI}$  3% OVER

SAY OK SINCE ... MAX WHEEL LOADS & BRAZING

STRESS IS  $\frac{27.2}{30} = 90\%$  of YIELD. JUDGE TO BE OK

# CALCULATION SHEET

STONE & WEBSTER, INC.

45010.81

J.O. / W.O. / CALCULATION NO. 213 1-15		REVISION 0	PAGE 19
PREPARED / DATE JWH 9/19/2001	REVIEWER / CHECKER / DATE P. J. V. 10/1/2001	INDEPENDENT REVIEWER / DATE X 10-02-01	
SUBJECT / TITLE AEC 213 1-15			QA CATEGORY / CODE CLASS 1

$$\Delta_{u2} \text{ Take a center span } a-b = x = \frac{L}{2} = 582''$$

$$= \frac{Pbx}{6EI\delta} (\delta^2 - b^2 \cdot x^2) = 0.234''$$

$$\Delta_{TOT} = 0.235'' + 0.278'' + 0.234'' = 0.747'' < 1.455'' \quad \text{OK}$$

## CHECK TROLLEY WHEEL LOAD VS. RECOMMENDED VALUES

[Ref #12 Table 4.11.3 & Ref #16 pg 102, 104]

MAX wheel load = 784\*

MAX Recommend (21"  $\phi$ , 135# RAIL, CLASS A1) = 75.6\*

FROM WHITING: "Table 4" <sup>pg. 104</sup> IS A GUIDE... THE FORMULA USED IN DETERMINING THE VARIOUS RECOMMENDED WHEEL LOADS IS EMPIRICAL."

WHITING CONTINUES BY STATING THAT BY EXCEEDING RECOMMENDED WHEEL LOADS THE USER MAY SEE MORE WEAR ON THE WHEELS IN THIS CASE, DUE TO INFREQUENCY OF USE, THE WEAR SHOULD BE MINOR OVER THE REMAINING LIFE OF THE PLANT.

THEREFORE ALTHOUGH THE TROLLEY LOADS ARE HIGHER THAN RECOMMENDED SAY OK BY JUDGEMENT

CONSIDERING WHEEL HARDNESS, X-SAM TROLLEY WHEEL LOADS ARE ACCEPTABLE THE CALCULATION ATT # 4

# CALCULATION SHEET

STONE & WEBSTER, INC.

J.O./W.O./CALCULATION NO.

REVISION

PAGE

A5010 61

PREPARED/DATE

REVIEWER/CHECKER/DATE

INDEPENDENT REVIEWER/DATE



SUBJECT/TITLE

QA CATEGORY/CODE CLASS

CHECK END TRUCK (REF # 4 & 10)

$$OBE = 51.02 + 137.5 + 16.97 = 205.49^k$$

$$DBE = 51.02 + 137.5 + 33.97 = 222.46^k$$

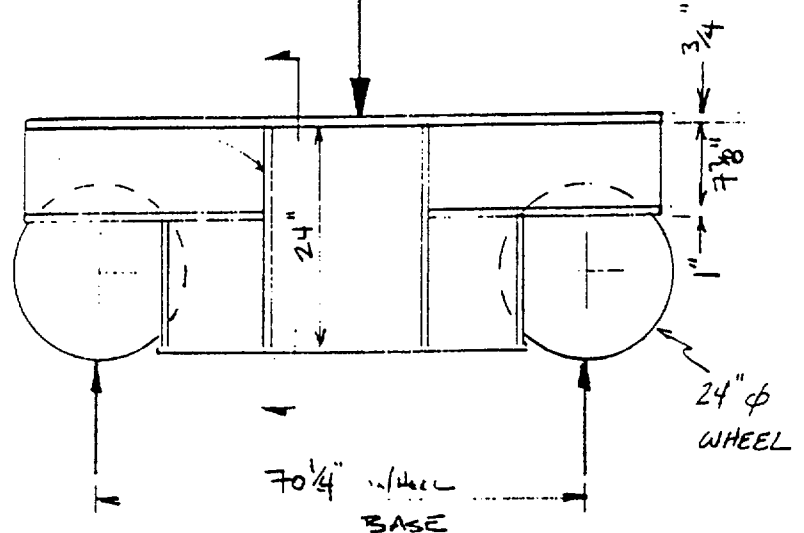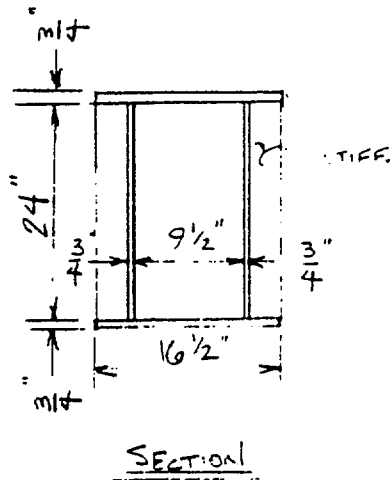

NOTE: TRUCK INSPECTION  $42^{\circ} > 20^{\circ}$  DEFLECTION FOR EQ & NOT IMPACT  
 & NORMAL ALLOWABLES

SECT. PROPERTIES

$$I = \frac{16.5(25.5^2 - 24^2)}{12} + 2 \frac{3/4 \times 24^3}{12} = 5519 \text{ in}^4$$

$$S_x = \frac{5519 \text{ in}^4}{12 \times 4} = 432.9 \text{ in}^3$$

OBE

$$M = \frac{PL}{4} = \frac{(205.49^k)(70.5")}{4} = 3622 \text{ in-k}$$

$$f_b = M/S = 8.37 \text{ ksi} < 17.6 \text{ ksi} \text{ OK}$$

DBE

$$M = 3921 \text{ in-k}$$

$$f_b = 9.06 \text{ ksi} < 15 \times 17.6 = 26.4 \text{ ksi} \text{ OK}$$

# CALCULATION SHEET

STONE & WEBSTER, INC.

AS01061

J.O./W.O./CALCULATION NO.

15131 SS-3

REVISION

0

PAGE

21

PREPARER/DATE

Jim 9/12/2001

REVIEWER/CHECKER/DATE

Re - W 09/11/2001

INDEPENDENT REVIEWER/DATE

Ja 10-02-01

SUBJECT/TITLE

TAFEC

QA CATEGORY/CODE CLASS

SHEAR OVER WHEEL

$$A_v = 3 \times 7 \frac{7}{8} \times 0.14 = 11.825 \text{ in}^2$$

OBE

$$R = \frac{1}{2} (20549) = 102.7 \text{ K}$$

$$f_v = 8.69 \text{ ksi} < 13.2 \text{ ksi} \quad \text{OK}$$

DBE

$$R = \frac{1}{2} (23246) = 116.2 \text{ K}$$

$$f_v = 9.41 \text{ ksi} < 1.5 \times 132 \quad \text{OK}$$

EARTHQUAKE DESIGN - (R1 #2)

$$R = 7 \frac{7}{8} \text{ ft} \times 11.2 \text{ ft} = 87.5 \text{ ft}^2$$

(say A325 N)

$$V_{ALL} = 15 \times 12.6 \text{ K} = 151.2 \text{ K} \quad \text{end}$$




$$\text{Total EQ Load} \leq 2 \times 151.2 = 302.4 \text{ K}$$

$$\text{MAX HORZ FLD (only - 1079 K - DBE)} \ll 302.4 \text{ K} \quad \text{OK}$$





## CALCULATION TITLE PAGE

CLIENT & PROJECT <b>DAEC - DUANE ARNOLD ENERGY CENTER - UNIT NO. 1</b>				PAGE 1 OF 106 PLUS 3 PGS OF ATTACHMENTS			
CALCULATION TITLE  <b>REACTOR BUILDING CRANE SUPPORT STRUCTURE DESIGN CHECK</b>				QA CATEGORY (X)  <input checked="" type="checkbox"/> I - NUCLEAR SAFETY RELATED  <input type="checkbox"/> II <input type="checkbox"/> III <input type="checkbox"/> OTHER			
CALCULATION IDENTIFICATION NUMBER				OPTIONAL WORK PACKAGE NO.  N / A			
J.O. OR W.O. NO.	DIVISION & GROUP	CURRENT CALC. NO.	OPTIONAL TASK CODE				
12133	CIVIL/STRUCT	SS - 1					
APPROVALS - SIGNATURE & DATE				REV. NO. OR NEW CALC. NO.	SUPERSEDES CALC. NO. OR REV. NO.	CONFIRMATION REQUIRED (X)	
PREPARER(S)/DATE(S)	REVIEWER(S)/DATE(S)	INDEPENDENT REVIEWER(S)/DATE(S)	YES			NO	
M.N. Scacco 9/27/01 	D.M. Hermann 10/1/2001 	ROGER MA 10/01/01 	0	N / A		X	
DISTRIBUTION							
GROUP	NAME & LOCATION	COPY SENT (X)	GROUP	NAME & LOCATION	COPY SENT (X)		
RECORDS MGT. FILES (OR FIRE FILE IF NONE)	JOB BOOK FIRE FILE  S. M. Macie	ORIG X  X					

## CALCULATION SHEET

J.O.W.O./CALCULATION NO.

REVISION

PAGE

12133 - SS - 1

0

2

PREPARER/DATE

M. Scacco 9/27/01

REVIEWER/CHECKER/DATE

DMM 10/1/01

INDEPENDENT REVIEWER

R. MA 10/1/01

SUBJECT/TITLE

DAEC - Reactor Building Crane Support Structure Design Check

QA CATEGORY/CODE CLASS

1

## TABLE OF CONTENTS AND HISTORICAL DATA

(Revisions, Additions, Deletions, Etc.)

PAGE NO.	DESCRIPTION	REVISION		REMARKS
		NO.	DATE	
1	Calculation Title Page			
2,3	Table of Contents and Historical Data			
4	Record of Revisions			
5,6	Calculation Summary			
7	References			
8	Record of Confirmations			
9	Original Design Assumptions			
	<b>Body of Calculation</b>			
10	Design Basis and Assumptions			
11, 12	Loads for Computer Input			
13	Trolley Weight Distribution			
14 - 17	Crane Wheel Geometry and Load Distribution			
	<b>PART 1 - Analysis of Crane Runway Girder</b>			
18, 19	Crane Runway - Section Properties			
20,21	Wheel Placement on Runway			
22	DAEC Crane Runway -GTSTRUDL Model			
23-37	GTSTRUDL Run -Crane Runway			
38	Discussion of GTSTRUDL Results			
39-43	Structural Analysis of Runway Beam			
45 - 52	<b>PART 2 - Analysis of Crane Support Rigid Frame</b> Basic Load Development for Frame			

## CALCULATION SHEET

J.O.W.O./CALCULATION NO.

12133 - SS - 1

REVISION

0

PAGE

3

PREPARER/DATE

M. Scacco 9/27/01

REVIEWER/CHECKER/DATE

DMH 10/1/01

INDEPENDENT REVIEWER

R. MA m/d 01

SUBJECT/TITLE

DAEC - Reactor Building Crane Support Structure Design Check

QA CATEGORY/CODE CLASS

1

## TABLE OF CONTENTS AND HISTORICAL DATA

(Revisions, Additions, Deletions, Etc.)

PAGE NO.	DESCRIPTION	REVISION		REMARKS
		NO.	DATE	
53,54	GTSTRUDL Model - Rigid Frame			
55-69	GTSTRUDL Run - Rigid Frame			
70	Conclusions - Rigid Frame Analysis			
	<b>PART 3 - Analysis of 4-Frames w/ Bracing for DBE Loads</b>			
72 -75	Load Development - 4 Frames			
76 -80	GTSTRUDL Model - 4 Frames			
81 -98	GTSTRUDL Run - 4 Frame Analysis			
99-101	Runway Bracket Design Check			
102	Transfer of Lateral Forces			
103	Bearing Stiffener Check			
104-106	Check of Girder Splice - Rigid Frame			
	<b>ATTACHMENTS</b>			
1,2	Attachment 1 - Ederer Crane Trolley Load distribution-Email From Jim Nelson/telecon from S. Macie dated 7/24-2 pages			
1	Attachment 2 - Vulcraft Roof Deck Data Sheet -1 page			

## CALCULATION SHEET

J.O.W.O./CALCULATION NO. 12133 - SS - 1		REVISION 0	PAGE 4
PREPARER/DATE M. Scacco 9/27/01	REVIEWER/CHECKER/DATE <i>DMH</i> 10/1/01	INDEPENDENT REVIEWER <i>R. MA</i> 10/1/01	
SUBJECT/TITLE DAEC - Reactor Building Crane Support Structure Design Check		QA CATEGORY/CODE CLASS 1	

RECORD OF REVISIONS

## REVISION 0

Original Issue

## CALCULATION SHEET

J.O.W.O./CALCULATION NO. 12133 - SS - 1		REVISION 0	PAGE 5
PREPARER/DATE M. Scacco 9/27/01	REVIEWER/CHECKER/DATE <i>Dmit</i> 10/1/01	INDEPENDENT REVIEWER <i>R. MA</i> 10/1/01	
SUBJECT/TITLE DAEC - Reactor Building Crane Support Structure Design Check		QA CATEGORY/CODE CLASS	

**CALCULATION SUMMARY****OBJECTIVE OF CALCULATION:**

The purpose of this calculation is to check the design of the Reactor Building structure for the new loadings imposed by the 100 ton capacity Reactor Building crane. The new loads are the result of increased weight associated with the replacement single-failure-proof trolley installed in 1986.

The calculation is a follow-up effort to the S & W Report No. 12133.1004-S(C) - 2, Rev. 0 (Ref.#1). The calculation provides a new and more detailed study of the structural adequacy of the Reactor Building crane runway and support structure, for the increased weight (21 kips) of the trolley. The calculation also evaluates the design condition of maximum lifted loads during a seismic event.

The following specific points will be addressed by this calculation:

- Design check of crane runway (including rail) and runway support structure using increased trolley load of 20,800 lbs.
- Design check using the revised trolley wheelbase geometry.
- Design check for unequal wheel loads.
- Design check for locations of wheel loads at worst-case positions along the runway girders.
- Design check of welds at runway girder brackets and bearing stiffeners due to increased loads.
- Provide reference to seismic documentation (UFSAR) in calculation.
- Re-compute seismic load combinations using vertical accelerations stated in UFSAR.
- Design check of the capability to transfer lateral loads from the crane to the runway girder.

**CALCULATION METHOD/ASSUMPTIONS:**

The calculation utilizes standard engineering practice and follows analysis methods described in previous DAEC calculations. Specific assumptions, as required, are identified within the body of the calculation. Conservative inputs and assumptions are used throughout this calculation.

The original design assumptions were used for this analysis. They were taken from Ref. #4 and are listed on page 7 of this calculation. The analysis method used for this calculation is both hand calculation and GT STRUDL Version 25. Additional assumptions and discussion of analysis methods are given on page 10 of this calculation.

**SOURCES OF DATA/EQUATIONS:**

The list of references used in this calculation is shown on page 7. This calculation uses vertical accelerations of .04g OBE and .08g DBE (Ref. 10, page 5). The vertical seismic load combinations include the weight of the crane and the lifted load. The horizontal accelerations used were .35g OBE and .70g DBE at the crane level and .52g OBE and 1.04g DBE at the roof level. Horizontal seismic loads include only the dead load of the crane (i.e., not the lifted load). The lifted load in

## CALCULATION SHEET

J.O./W.O./CALCULATION NO. 12133 - SS - 1		REVISION 0	PAGE 6
PREPARER/DATE M. Scacco 9/27/01	REVIEWER/CHECKER/DATE <i>DAH 10/1/01</i>	INDEPENDENT REVIEWER <i>R. MA 10/1/01</i>	
SUBJECT/TITLE DAEC - Reactor Building Crane Support Structure Design Check		QA CATEGORY/CODE CLASS 1	

horizontal seismic load combinations is typically not included due to the fact that the hanging load is free to sway.

**CONCLUSIONS:**

The analysis of the existing crane runway girders were shown to be adequate as designed. The combined stresses were shown to be less than the allowable stresses. See pages 41 - 43.

The rigid frame bents were then analyzed using the worst case loads from the runway analysis and were found to be adequate as designed, except for the DBE load combinations which were found to exceed the allowable stresses, when only one frame is considered. A new analysis was then performed which considered the contribution of the roof bracing and end walls. This analysis proved that the design is adequate for the DBE load cases as well. See pages 44 - 98.

The haunch at the top of the columns in the rigid frame was simplified for the analysis. This was considered a conservative approach, since the critical sections for moment were located in the transverse girder and the column base.

Connection details were then checked and found to be adequately designed. See pages 99 -106.

The Reactor Building crane support structure is adequately designed for the increased weight of the replacement trolley and for all appropriate load combinations, including maximum lifted load plus seismic.

The foundation design was not investigated, because the increase in column forces due to the increased trolley weight was not of significant magnitude to warrant a new analysis.

## CALCULATION SHEET

J.O./W.O./CALCULATION NO.

REVISION

PAGE

12133 - SS - 1

0

7

PREPARER/DATE

M. Scacco 9/27/01

REVIEWER/CHECKER/DATE

*Duane 10/1/01*

INDEPENDENT REVIEWER

*R. MA 10/1/01*

SUBJECT/TITLE

DAEC - Reactor Building Crane Support Structure Design Check

QA CATEGORY/CODE CLASS

1

**References:**

1. Phase I Structural Evaluation Report for DAEC Reactor Building Crane Runway/Support Structure, Duane Arnold Energy Center, 12133.1004-S(C) - 2, Rev. 0, dated 6/25/01.
2. DAEC UFSAR, Sections 2.5, 3.7, and 3.8, Rev. 13.
3. Phase I Structural Evaluation Report for DAEC Reactor Building Crane Girders, Duane Arnold Energy Center, 12133.1004-S(C) - 1, Rev. 0, dated 6/04/01.
4. Bechtel DAEC Calculation 3-F-6, dated 5-8-70, Crane Frame (Space Frame) R.B.
5. Bechtel DAEC Calculation 3-F-6, April, 1971, Supplemental Calculation for Rigid Frame.
6. Bechtel DAEC Calculation 3-F-8, dated 11/7/73, Reactor Building Overloading of Reactor Crane.
7. Bechtel DAEC Drawings
  - a. BECH-A008, Rev. 20, Arch. Roof Plan
  - b. BECH-A009, Rev. 20, Arch. North, South & Partial Exterior elevations
  - c. BECH-A010, Rev. 15, Arch. East, West & Partial Exterior Elevations
  - d. C-435, Rev. 3, R.B. Roof Framing Plan, Sections & Details
  - e. C-437, Rev. 4, R.B. Craneway Plan & Details
  - f. C-438, Rev. 2, R.B. Framing Elevations & Details Sheet #1
  - g. C-439, Rev. 1, R.B. Framing Sections & Details Sheet #2
  - h. C-442, Rev. 1, R.B. Rigid Frame Cross Section & Details
8. AISC Manual of Steel Construction, Sixth (1963) & Seventh (1970) editions.
9. AISC Manual of Steel Construction, Ninth (1989) edition.
10. DEAC Reactor Building Earthquake Analysis, by John A. Blume & Associates, Engineers, APED-A61-047, Rev. 1

## CALCULATION SHEET

J.O.W.O./CALCULATION NO.

12133 - SS - 1

REVISION

0

PAGE

8

PREPARER/DATE

M. Scacco 9/27/01

REVIEWER/CHECKER/DATE

D. H. 10/1/01

INDEPENDENT REVIEWER

R. MA 10/1/01

SUBJECT/TITLE

DAEC - Reactor Building Crane Support Structure Design Check

QA CATEGORY/CODE CLASS

1

RECORD OF CONFIRMATIONSPage No.DescriptionActionConfirmation Date

All

None



## CALCULATION SHEET

J.O.W.O./CALCULATION NO. 12133 - SS - 1		REVISION 0	PAGE 9
PREPARER/DATE M. Scacco 9/27/01	REVIEWER/CHECKER/DATE D.M.H. 10/1/01	INDEPENDENT REVIEWER R. MA 10/1/01	
SUBJECT/TITLE DAEC - Reactor Building Crane Support Structure Design Check		QA CATEGORY/CODE CLASS I	

**ORIGINAL DESIGN ASSUMPTIONS** (Ref. #4, page 5) (*comments in parentheses*)

1. Impact will be considered for the design of the crane runway girders and the related connections but not for frame design.
2. Lifted load will not act simultaneously with Tornado and Earthquake. The (*bridge and*) trolley is in stored position. (*no lateral force and impact*)
3. One third of siding area (*considered*) left (*intact*) for tornado. No roof suction is considered for this case.
4. Earthquake force is assumed to concentrate at the rigid frame at two points. El. 876'-6" and El. 894'-8". (*these elevations were modified slightly to coincide with as-built condition, see page 10, item 8 for details*)
5. Roof loads are assumed to be uniformly distributed directly to the rigid frame. Purlins and other bracing members do not take external load in the computer analysis. Purlins will be analyzed manually. (*purlins were not in the scope of this calculation*)
6. Assume that the roof girders are level. (*actual roof slope was modeled in GTSTRUDL*)
7. Ends of purlins and all bracing members will be released, hinged ends.
8. Assume that it is a space frame.
9. Wind force is assumed to be uniformly distributed directly to columns.
10. Assume that roof loads and parapet loads lumped at El. 894'-8".  
Column, siding, and crane lumped at El. 876'-6". (*elevations were changed slightly to match as-built elevations*)

# CALCULATION SHEET

STONE & WEBSTER ENGINEERING CORPORATION

45010/51

J.O./W.O./CALCULATION NO. 12133-SS-1		REVISION 0	PAGE 10
PREPARED/DATE M. V. SCACCO 7/24/01	REVIEWER/CHECKER/DATE Dmr 10/1/01	INDEPENDENT REVIEWER/DATE R. MA 10/1/01	
SUBJECT/TITLE DEAC - REACTOR BUILDING CRANE SUPPORT		QA CATEGORY / CODE CLASS I	

## DESIGN BASIS AND ASSUMPTIONS

1. DESIGN METHOD BASED IN GENERAL ON EXISTING CALCS PREPARED BY BECHTEL (REF. #4 THRU #6) ANY DEVIATIONS AND EXCEPTIONS WILL BE NOTED BELOW.
2. OBE AND DBE DESIGN EARTHQUAKE HORIZONTAL AND VERTICAL ACCELERATIONS BASED ON ATTACHMENT 3 OF REF. #1. THE UFSAR (REF. #2) LISTS THE SAME VALUES.
3. FOR LATERAL CRANE IMPACT LOADS, WE USED 20% OF THE SUM OF THE WEIGHTS OF THE LIFTED LOAD AND CRANE TROLLEY, BUT EXCLUDING THE BRIDGE WEIGHT, IN ACCORDANCE WITH AISC, REF # 9.
4. LIFTED LOAD OF 200<sup>K</sup> (100T) WAS NOT INCLUDED WHEN CALCULATING OBE AND DBE HORIZONTAL FORCES. THE LIFTED LOAD WAS INCLUDED IN DETERMINING VERTICAL OBE AND DBE FORCES.
5. ALL LOADS AND COMBINATIONS OF LOADS WERE BASED ON THE ORIGINAL CALCULATIONS AND UFSAR (REF. #2). SEE PAGES 11 & 12 FOR DETAIL.
6. THE CRANE WHEEL GEOMETRY AND DISTRIBUTION OF WHEEL LOADS WAS ADJUSTED FROM THE ORIGINAL DESIGN TO MORE CLOSELY REFLECT THE ACTUAL INSTALLED CONDITIONS, USING THE EDERER TROLLEY (43 TON) AND ACTUAL WHEEL BASE DIMENSIONS. THIS DETAIL IS SHOWN ON PAGES 13 & 14.
7. CALCULATED WHEEL LOADS WERE PLACED ON THE CRANE RUNWAY AT 3 FT. INTERVALS TO DETERMINE WORST POSSIBLE REACTIONS. A GT STRUDL MODEL OF THE RUNWAY BEAM WAS CREATED TO FIND THE MAXIMUM REACTIONS AT THE LOCATIONS OF THE RIGID FRAME BENTS.
8. RIGID FRAME MODEL WAS CREATED FROM BECHTEL DWGS. REF #7. ELEVATIONS ARE TOP OF STEEL FOR HORIZONTAL MEMBERS AND CENTERLINE FOR VERTICAL MEMBERS. ROOF SLOPE (1/4" / FT.) WAS ALSO INCLUDED.

# CALCULATION SHEET

STONE & WEBSTER ENGINEERING CORPORATION

45010 61

J.O./W.O./CALCULATION NO. 12133-SS-1		REVISION 0	PAGE 11
PREPARED/DATE M. N. SCACCO 7/25/01	REVIEWER/CHECKER/DATE JMM 10/1/01	INDEPENDENT REVIEWER/DATE RMA 10/1/01	
SUBJECT/TITLE JAEC - REACTOR BUILDING CRANE SUPPORT			QA CATEGORY/ CODE CLASS I

## LOADS FOR COMPUTER INPUT

### BASIC LOADS (SELFWEIGHT ADDED TO ALL DL COMBS)

1. ROOF DL. (18 PSF - USED IN ORIGINAL DESIGN)
2. ROOF LL (40 PSF SNOW - USED IN ORIGINAL DESIGN)
3. WIND LOAD (MAX. TO RIGHT)
4. WIND LOAD (MAX. TO LEFT)
5. TORNADO (MAX. TO RIGHT)
6. TORNADO (MAX. TO LEFT)
7. EQ (OBE) (MAX. TO RIGHT)
8. EQ (OBE) (MAX. TO LEFT)
9. EQ (DBE) (MAX. TO RIGHT) (2X OBE VALUES)
10. EQ (DBE) (MAX. TO LEFT) (2X OBE VALUES)
11. CRANE W/IMPACT (MAX. TO RIGHT)
12. CRANE W/IMPACT (MAX. TO LEFT)

### LOAD COMBINATIONS

1.  $D + L + CR (R)$   
1 + 2 + 11 (NO STRESS INCREASE PER REF. #2)
2.  $D + L + CR (L)$   
1 + 2 + 12 (NO STRESS INCREASE PER REF. #2)
3.  $D + L + W (R)$   
1 + 2 + 3 (0.33 INCREASE ALLOWED - PER REF #2)
4.  $D + L + W (L)$   
1 + 2 + 4 (0.33 INCREASE ALLOWED - PER REF #2)

# CALCULATION SHEET

STONE & WEBSTER ENGINEERING CORPORATION

AS 1010.61

J.O./W.O./CALCULATION NO. 12133-SS-1		REVISION 0	PAGE 12
PREPARED/DATE M. N. SCACCO 7/25/01	REVIEWER/CHECKER/DATE T. H. H. 10/1/01	INDEPENDENT REVIEWER/DATE R. MA 10/1/01	
SUBJECT/TITLE DAEC - REACTOR BUILDING CRANE SUPPORT			QA CATEGORY/CODE CLASS I

## LOAD COMBINATIONS (CONT.)

5.  $D + W (R)$  (0.33 STRESS INCREASE ALLOWED  
- PER REF. # 2)
6.  $D + W (L)$  (0.33 STRESS INCREASE ALLOWED  
- PER REF. # 2)
7.  $D + TORNADO (R)$  (0.50 STRESS INCREASE ALLOWED  
- PER REF. # 2)
8.  $D + TORNADO (L)$  (0.50 STRESS INCREASE ALLOWED  
- PER REF. # 2)
9.  $D + L + EQ (OBE-R)$  (0.25 STRESS INCREASE ALLOWED  
- PER REF. # 2)
10.  $D + L + EQ (OBE-L)$  (0.25 STRESS INCREASE ALLOWED  
- PER REF. # 2)
11.  $D + L + EQ (DBE-R)$  (0.50 STRESS INCREASE ALLOWED.  
- PER REF. # 2)
12.  $D + L + EQ (DBE-L)$  (0.50 STRESS INCREASE ALLOWED  
- PER REF. # 2)
13.  $D + L + \begin{cases} W (L) \\ W (R) \end{cases} + CR (R)$  (0.33 STRESS INCREASE ALLOWED  
- PER REF. # 2)
14.  $D + L + \begin{cases} W (L) \\ W (R) \end{cases} + CR (L)$  (0.33 STRESS INCREASE ALLOWED  
- PER REF. # 2)

NOTE: THE DEAD LOAD OF THE CRANE IS INCLUDED IN ALL OF THE LOAD COMBINATIONS CONSIDERED.

THE LIVE LOAD (LIFTED LOAD = 100 TONS) OF THE CRANE WAS NOT INCLUDED IN THE SEISMIC COMBINATIONS FOR HORIZONTAL LOAD; ONLY FOR VERTICAL LOAD.

# CALCULATION SHEET


STONE & WEBSTER ENGINEERING CORPORATION

ASJ1061

J.O./W.O./CALCULATION NO. 12133-SS-1		REVISION 0	PAGE 13
PREPARED/DATE M.N. SCACCO 2/02/01	REVIEWER/CHECKER/DATE DWH 10/1/01	INDEPENDENT REVIEWER/DATE RMA 10/1/01	
SUBJECT/TITLE DAEC REACTOR BUILDING CRANE SUPPORT		QA CATEGORY/CODE CLASS I	

## TROLLEY WEIGHT DISTRIBUTION

ACCORDING TO ATTACHMENT 1, E-MAIL FROM JIM NELSON OF EDERER CO., THE FOLLOWING DISTRIBUTION OF WHEEL LOADS WERE GIVEN:

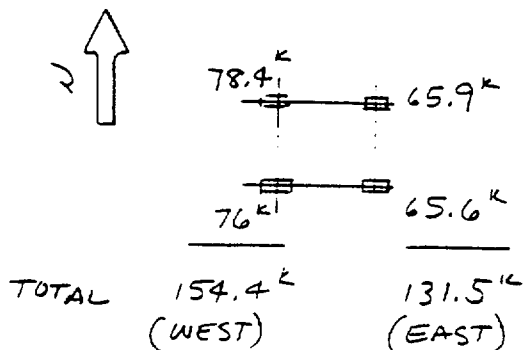

LOADS INCLUDE LIFTED LOAD OF 50 k EACH WHEEL

$$SUM = 285.9 \text{ k} \left\{ \begin{array}{l} 200 \text{ k LIFTED LOAD} \\ 85.9 \text{ k TROLLEY} \end{array} \right.$$

$$AVERAGE = 77.2 \text{ k} \times \frac{1}{2}$$

$$65.75 \text{ k}$$

← USE THIS LOAD FOR EACH BRIDGE GIRDER TO COMPUTE REACTIONS AT ENDS OF GIRDER

SEE NEXT PAGE FOR WHEEL LOADS INCLUDING BRIDGE WEIGHT = 220.1 k

# CALCULATION SHEET

STONE & WEBSTER ENGINEERING CORPORATION

J.O./W.O./CALCULATION NO.

REVISION

PAGE

12133-SS-1

0

14

PREPARED/DATE

M. N. SCACCO 7/24/01

REVIEWER/CHECKER/DATE

JMV 10/1/01

INDEPENDENT REVIEWER/DATE

R. MA 10/1/01

SUBJECT/TITLE


DAEC REACTOR BUILDING CRANE SUPPORT

QA CATEGORY/CODE CLASS

I

## CRANE WHEEL GEOMETRY & LOADS

(REF. #1)

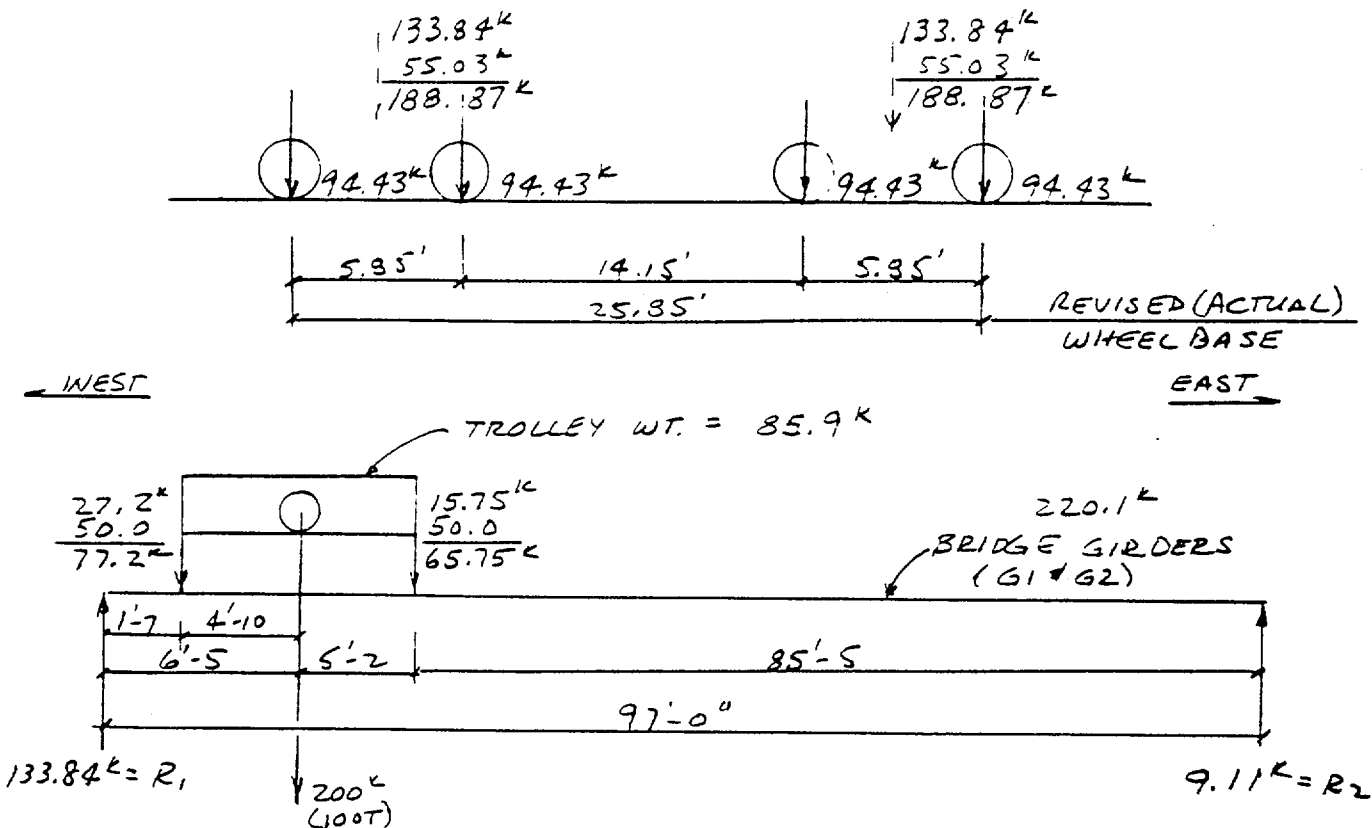

REV'D TROLLEY WT. = 85.9 k

GIRDER: 220.1 k/4 TRUCKS  
= 55.03 k

TROLLEY: SEE ABOVE DIAGRAM

LIFTED LOAD: 200 k/4 WHEELS = 50 k

$$R_1 = \frac{77.2 (97 - 1.58)}{97} + \frac{65.75 (85.417)}{97} = 133.84 \text{ k}$$

$$R_2 = 77.2 + 65.75 - 133.84 = 9.11 \text{ k}$$

WHEEL LOAD w/o IMPACT = 94.43 k  
(MAX.)

# CALCULATION SHEET

STONE & WEBSTER ENGINEERING CORPORATION

AS010 51

J.O./W.O./CALCULATION NO. 12/33-SS-1		REVISION 8	PAGE 15
PREPARER/DATE M.N. SCACCO 7/24/01	REVIEWER/CHECKER/DATE J.M.H. 10/1/01	INDEPENDENT REVIEWER/DATE R. MA 10/1/01	
SUBJECT/TITLE DAEL REACTOR BUILDING CRANE SUPPORT		QA CATEGORY/CODE CLASS I	

## CRANE WHEEL LOADS (CONT.)

NEW LOADS: WHEEL LOAD w/IMPACT:

$$\text{GINDER WT.} = 55\text{K}/2 = 27.5\text{K}$$

$$\text{IMPACT} = 0.25 \times 27.5\text{K} = 6.88\text{K}$$

$$\text{TROLLEY} = \frac{27.2 (95.42)}{97 (2)} + \frac{15.75 (35.42)}{97 (2)} = 20.31\text{K}$$

$$\text{IMPACT} = 0.25 \times 20.31 = 5.08\text{K}$$

$$\text{LIFTED LOAD} = \frac{50 (180.84)}{97 (2)} = 46.6\text{K}$$

$$\text{IMPACT} = 0.25 \times 46.6 = 11.65\text{K}$$

$$\text{TOTAL} = 27.5 + 6.88 + 20.31 + 5.08\text{K} + 46.6\text{K} + 11.65\text{K}$$

$$= \underline{\underline{118.02\text{K} / \text{WHL}}}$$

# CALCULATION SHEET

STONE & WEBSTER ENGINEERING CORPORATION

45010 51

J.O./W.O./CALCULATION NO. 12133-SS-1		REVISION 2	PAGE 16
PREPARED/DATE M. N. SCACCO 7/24/01	REVIEWER/CHECKER/DATE T.M.H. 10/1/01	INDEPENDENT REVIEWER/DATE R. MA 10/1/01	
SUBJECT/TITLE DAEC REACTOR BUILDING CRANE SUPPORT		QA CATEGORY/CODE CLASS I	


CRANE WHEEL LOADS (USED FOR SEISMIC FORCES)

NEGLECT LIFTED LOAD FOR HORIZONTAL EQ:

$$R_1 = \frac{27.2}{97} (97 - 1.58) + \frac{15.75}{97} (85.417) = 40.63^k$$

$$R_2 = 27.2 + 15.75 - 40.63 = 2.32^k$$

SO GIRDER WT. = 220.1 / 4 TRUCKS = 55.03<sup>k</sup>

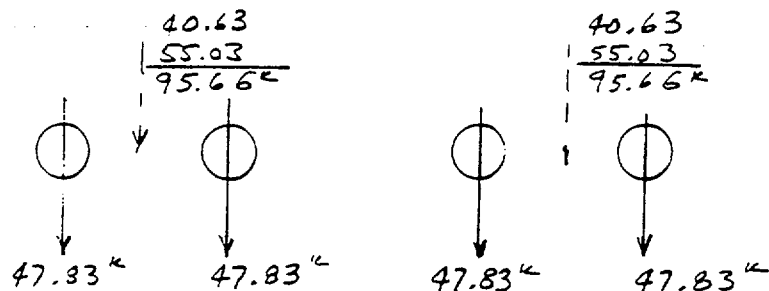

WHEEL LOAD (W/O IMPACT; UNLOADED CRANE) = 47.83<sup>k</sup>

EQ-LATERAL LOADS: DBE = 0.35 g @ EL. 876.5'

$$H_1 = 47.83 (0.35) = 16.74^k$$

$$H_2 = 47.83 \left( \frac{2.32}{40.63} \right) (0.35) = 0.96^k$$

DBE = 0.70 g @ EL. 876.5'

$$H_1 = 47.83 (0.70) = 33.48^k$$

$$H_2 = 47.83 \left( \frac{2.32}{40.63} \right) (0.70) = 1.91^k$$



# CALCULATION SHEET

STONE & WEBSTER ENGINEERING CORPORATION

AS0106

J.O./W.O./CALCULATION NO. 12133-SS-1		REVISION 0	PAGE 17
PREPARER/DATE M. N. SCACCO 7/29/01	REVIEWER/CHECKER/DATE DWH 10/1/01	INDEPENDENT REVIEWER/DATE R. MA 10/1/01	
SUBJECT/TITLE DAEC REACTOR BUILDING CRANE SUPPORT			QA CATEGORY/CODE CLASS I

## CRANE WHEEL LOADS (CONT.)

### VERTICAL LOADS (DUE TO SEISMIC) : (REF: PG 14)

$$OBE = \underline{0.04g} \times \text{LOADED CRANE W/NO IMPACT}$$

$$V_1 = 94.43 (0.04) = 3.78^k$$

$$V_2 = 94.43 \left( \frac{2.32}{40.63} \right) (0.04) = 0.22^k$$

$$DBE = \underline{0.08g} \times \text{LOADED CRANE W/NO IMPACT}$$

$$V_1 = 94.43 (0.08) = 7.55^k$$

$$V_2 = 94.43 \left( \frac{2.32}{40.63} \right) (0.08) = 0.43^k$$

## PART I

### ANALYSIS OF CRANE RUNWAY

#### GIRDER

# CALCULATION SHEET

STONE & WEBSTER ENGINEERING CORPORATION

AS01061

J.O./W.O./CALCULATION NO. 12132-SS-1		REVISION 0	PAGE 41
PREPARED/DATE M. N. SCACCO 2/01/01	REVIEWER/CHECKER/DATE JHM 10/11/01	INDEPENDENT REVIEWER/DATE R. MA 10/11/01	
SUBJECT/TITLE DAEC REACTOR BUILDING CRANE SUPPORT		QA CATEGORY/CODE CLASS I	

## ANALYSIS OF RUNWAY BEAM (CONT.)

$$F_{bx} = \underline{19.99 \text{ ksi}}$$

$$F_{by} = 0.75 F_y = 0.75 (36) = \underline{27.0 \text{ ksi}}$$

AXIAL FORCE ON THE RUNWAY BEAM = TRACTIVE FORCE  
(LONGITUDINAL) = 10% OF MAX. WHEEL LOAD (W/ IMPACT)

$$= 0.10 \times 118.1^k \times 4 \text{ WHEELS} = 47.24^k$$

$$f_a = \frac{P}{A} = \frac{47.24}{75.5} = 0.626 \text{ ksi}$$

$$\text{MAXIMUM } \frac{KL}{r} = \frac{K L_y}{r_y} = \frac{1.0 (22.75)(12)}{5.25} = 52.0$$

$$\frac{KL/r}{C_c} = \frac{52.0}{126.1} = 0.41 \Rightarrow C_a = 0.506 \text{ (AISC TABLE 3 REF. 9)}$$

$$F_a = 0.506 \times F_y = 0.506 (36) = \underline{18.17 \text{ ksi}}$$

$$\frac{KL_x}{r_x} = \frac{1.0 (22.75)(12)}{14.95} = 18.26$$

$$F_{ex} = 338.62 \text{ ksi} \quad (\text{AISC, TABLE 3; REF \# 9})$$

$$F_{ey} = 55.23 \text{ ksi} \quad C_{mx} = C_{my} = 1.0 \text{ (CONS.)}$$

## CHECK COMBINED STRESSES:

$$\frac{f_a}{0.6 F_y} + \frac{f_{bx}}{F_{ox}} + \frac{f_{by}}{F_{oy}} \leq 1.0 \quad (\text{AISC H1-2})$$

$$\frac{0.626}{0.6 (36)} + \frac{15.78}{19.99} + \frac{3.35}{21.6} \leq 1.0$$

$$= 0.029 + 0.789 + 0.155 = \boxed{0.973} < 1.0 \therefore \text{OK}$$

# CALCULATION SHEET

STONE & WEBSTER ENGINEERING CORPORATION

A5010 61

J.O./W.O./CALCULATION NO. 12133-SS-1		REVISION 0	PAGE 02
PREPARED/DATE M.N. SCACCO 8/01/01	REVIEWER/CHECKER/DATE DMM 10/1/01	INDEPENDENT REVIEWER/DATE RMA 10/1/01	
SUBJECT/TITLE DAEC REACTOR BUILDING CRANE SUPPORT		QA CATEGORY/CODE CLASS I	

## ANALYSIS OF RUNWAY BEAM (CONT.)

$$\frac{f_a}{F_a} + \frac{C_{mx} f_{bx}}{(1 - \frac{f_a}{F_{ex}}) F_{bx}} + \frac{C_{my} f_{by}}{(1 - \frac{f_a}{F_{ey}}) F_{by}} \leq 1.0 \quad (\text{AISC H1-1})$$

$$= \frac{0.626}{18.17} + \frac{(1.0)(15.78)}{(1 - \frac{0.626}{338.62})19.99} + \frac{(1.0)(3.35)}{(1 - \frac{0.626}{55.23})21.6} \leq 1.0$$

$$= 0.034 + 0.791 + 0.157 = \boxed{0.982} < 1.0 \quad \therefore \text{OK}$$

ALTERNATIVELY; CHECK EQN. H1-3:

$$\frac{f_a}{F_a} + \frac{f_{bx}}{F_{bx}} + \frac{f_{by}}{F_{by}} \leq 1.0 \quad (\text{AISC H1-3})$$

$$= \frac{0.626}{18.17} + \frac{15.78}{19.99} + \frac{3.35}{21.6} \leq 1.0$$

$$= 0.034 + 0.789 + 0.155 = \boxed{0.978} < 1.0 \quad \underline{\text{OK}}$$

$\therefore$  COMBINED SECTION (W36X199 + W21X62) IS ADEQUATE.

## CHECK SHEAR STRESS:

$$V_{MAX} = 236 \text{ K} \quad f_v = \frac{236}{36.98(0.77)} = 8.40 \text{ KSI}$$

$$F_v = 0.4 F_y = 0.4 \times 36 = 14.4 \text{ KSI} \quad \therefore \underline{\text{OK}}$$

# CALCULATION SHEET

STONE & WEBSTER ENGINEERING CORPORATION

ASD 10 E\*

J.O./W.O./CALCULATION NO. 12133-SS-1		REVISION 0	PAGE 43
PREPARED/DATE M.N. SCACCO 8/03/01	REVIEWER/CHECKER/DATE JMM 10/1/01	INDEPENDENT REVIEWER/DATE R. MA 10/1/01	
SUBJECT/TITLE DAEC REACTOR BUILDING CRANE SUPPORT			QA CATEGORY/ CODE CLASS I

CHECK RUNWAY BEAM FOR  $\begin{cases} H=UNLOADED \\ V=LOADED CRANE + EQ - OBE \end{cases}$ :

SEE PG. 17 FOR OBE LOADS (VERTICAL)

$$RATIO - \frac{UNLOADED CRANE}{LOADED CRANE} = \frac{144.75}{357.3} = 0.405$$

$$SO, MAX. MOMENT (STRONG-AXIS) = 977 K-FT \times 0.405 = 395.7 K-FT.$$

$$MAX. MOMENT (WEAK-AXIS) = 395.7 \times 0.359 = 138.50 K-FT.$$

ADD'L MOMENT DUE TO VERTICAL EQ ACCELERATION:

$$M_v = 0.04g \times 977.0 = 39.08 K-FT.$$

$$f_{bx} = \frac{M_x + M_v}{S_x} = \frac{(395.7 + 39.08)(12)}{742.93} = 7.02 KSI$$

$$f_{by} = \frac{M_y}{S_y} = \frac{138.50(12)}{198.02} = 8.39 KSI \quad f_a = 0$$

0.25 STRESS INCREASE ALLOWED - BY INSPECTION, THIS CASE IS LESS CRITICAL THAN LOADED CRANE W/IMPACT.

CHECK RUNWAY BEAM FOR  $\begin{cases} H=UNLOADED \\ V=LOADED CRANE + EQ - DBE \end{cases}$ :

$$MAX. MOMENT (STRONG-AXIS) = 395.7 K-FT. (SAME AS ABOVE)$$

$$MAX. MOMENT (WEAK-AXIS) = 395.7 \times 0.70g = 276.99 K-FT$$

$$M_v = 0.08g \times 395.7 = 31.66 K-FT.$$

$$f_{bx} = \frac{(395.7 + 31.66)(12)}{742.93} = 7.65 KSI$$

$$f_{by} = \frac{276.99(12)}{198.02} = 16.79 KSI \quad f_a = 0 \text{ (NO TRACTIVE FORCE)}$$

$$\frac{f_a}{F_a} + \frac{f_{bx}}{F_{bx}} + \frac{f_{by}}{F_{by}} \leq 1.50 \quad \left\{ \begin{array}{l} 0.5 \text{ STRESS INCREASE} \\ \text{ALLOWED} \\ \text{(AISC H1-3)} \end{array} \right.$$

$$\frac{7.65}{19.99} + \frac{16.79}{21.6} = 1.16 < 1.50 \quad \therefore \underline{OK}$$

REV	PREPARED BY	VERIFIED BY	REVISION
3	1	1	
2	08 12-29-88	RB 12-29-88	Revised P. CT
1	12-21-84	08 12-27-84	ATTACHED-1 I REVISED PER FCR-1294-3 REV D
0	12-6-84	08 12-6-84	ADDED PER FCR-1294-3 REV D

FOR DCR 1294  
USE ONLY

DCR PACKAGE INDEX  
ITEM NO. 3.06

COVER PAGE FOR

STATIC LOAD TEST PROCEDURE  
(DESCRIPTION OF DOCUMENT) FOR NEW REACTOR BUILDING CRANE

DOCUMENT NUMBER N/A REV/DATE 0/12-4-84

NUMBER OF SHEETS 70 (including cover) 12

DCR-1294

## STATIC LOAD TEST PROCEDURE FOR NEW REACTOR BUILDING CRANE

NOTE: Before the static load test is performed, all inspections and non-load pre-operational tests shall be completed and documented.

### 1.0 SCOPE

Prior to declaring the crane operational, a static load test must be performed on the crane to verify its structural and component integrity. This test procedure was developed by Design Engineering with input from Ederer Inc. Procedure No. 250, Test Sections 250.14 and 250.15. Test Section 250.14 is designed to test the integrity of the bridge and trolley structures. Test Section 250.15 is designed to test the trolley and bridge components by moving the bridge and trolley while suspending a test load. Due to the configuration of the DAEC, Test Section 250.14 cannot be performed without bringing the test load to the refuel floor. Therefore, this procedure shall combine Test Sections 250.14 and 250.15 to minimize the movement of the test load.

During the load test the ambient temperature on the refuel floor must be lowered to 50°F (+5°, -0°) to fulfill a commitment made to the NRC. (Reference the DCP form, page 5.) All tests shall be performed under the supervision of the Ederer Field Engineer. The Responsible Construction Engineer (RCE) shall be responsible for the overall coordination of the testing. Operations shall be responsible for the actual operation of the crane.

### 2.0 EQUIPMENT REQUIRED

The equipment required for the static load testing shall include but not be limited to the following:

- A. Test platform for supporting test weights (see Attachment I for requirements).
- B. Assortment of test weights in arrangements of approximately 6.25, 50, 100, and 125 tons (see Attachment I for details).

### 3.0 ADDITIONAL RECOMMENDATIONS

- A. To successfully satisfy the requirements of the Ederer procedures, the tests only need to be performed with a test load weight of 1.25 times the crane rating (6.25T, 125T). However, Design Engineering recommends that for the main hoist the test be run with increasing amounts of weight (50T, 100T, 125T) to provide greater assurance that the trolley and bridge will support the 125T load. This procedure has been developed based on this criteria. If DAEC personnel feel that only the 125T test is required, consult Design Engineering for resolution.

- B. During the load test, Design Engineering recommends that personnel traffic in the Reactor Building be kept to a minimum and personnel be restricted from the load path on floors below elevation 855'-0".
- C. Attachment 1 provides the various configurations of weights required to obtain the 6.25, 50, 100, and 125T test loads. Recommended methods for stacking the weights are also provided; however, the field may utilize other methods if desired.

#### 4.0 LOAD TEST FOR MAIN HOIST

##### A. 50 Ton Test Load

1. Connect the main hoist hook to the 50 ton test load and raise the test load approximately 6" above the 757'-6" floor using the slowest hook speed. To satisfy the requirements of Ederer Procedure 250 (Attachment I to Index Item 3.02), Test Section 250.14.c and Test Section 250.15.b, the test load shall be suspended approximately 5 minutes to ensure that the brakes are able to hold the load. If the hoist is not able to lift and hold the test load, refer to Section 251.12 of Ederer Procedure 251 (Attachment II to Index Item 3.02) for adjustment. The RCE shall verify that the crane is able to hold the load and that any adjustments have been completed.

*J. King* 1-9-85  
Signed: RCE/Date

2. Raise the test load approximately 3' off of the floor, hold the load and then lower load using the slowest hook speed. After load speed has stabilized, stop the test load and ensure the brake holds the load. The RCE shall verify that the brakes were able to stop and hold the test load.

*J. King* 1-9-85  
Signed: RCE/Date

3. Raise the test load up to the refuel floor using the slowest hook speed and follow the load path shown on Fig. 1. After completing the load movement on the refuel floor, the test load shall be lowered back down the equipment hatch at the slowest hook speed and set on the 757'-6" elevation, in the location shown in Fig. 2. The RCE shall verify that during the lift and trolley/bridge movements, the crane operates smoothly and performs normally.

*J. King* 1-9-85  
Signed: RCE/Date

##### B. 100 Ton Test Load

1. Perform the test described in Section 4.A.1 above for a 100T test load. The RCE shall verify that the crane is able to hold the load and that any adjustments have been completed.

*J. King* 1-10-85  
Signed: RCE/Date

2. Perform the test described in Section 4.A.2 above for the 100T test load. The RCE shall verify that the brakes were able to stop and hold the test load.

J. Gray 1-10-85  
Signed: RCE/Date

3. Perform the test described in Section 4.A.3 above for the 100T test load. The RCE shall verify that during the lift and trolley/bridge movements, the crane operates smoothly and performs normally.

J. Gray 1-10-85  
Signed: RCE/Date

C. 125 Ton Test Load

1. Perform the test described in Section 4.A.1 above for a 125T test load. The RCE shall verify that the crane is able to hold the load and that any adjustments have been completed. The RCE shall verify that the checklists and Test Sections 250.14 and 250.15 have been filled out.

J. Gray 1-10-85  
Signed: RCE/Date

2. Perform the test described in Section 4.A.2 above for the 125T test load. The RCE shall verify that the brakes were able to stop and hold the test load. The RCE shall verify that the checklists in Test Sections 250.14 and 250.15 have been filled out.

J. Gray 1-10-85  
Signed: RCE/Date

3. Perform the test described in Section 4.A.3 above for the 125T test load. The RCE shall verify that during the lift and trolley/bridge movements, the crane operates smoothly and performs normally. The RCE shall verify that the checklists in Test Sections 250.14 and 250.15 have been filled out.

J. Gray 1-10-85  
Signed: RCE/Date

5.0 LOAD TEST FOR AUXILIARY HOIST

A. 6.25 Ton Test Load

1. Connect the auxiliary hoist hook to the 6.25 ton test load. Raise the test load approximately 3 ft. off of the 757'-6" floor using the slowest hook speed and stop the load and hold for approximately 5 minutes. The RCE shall verify that the brakes are able to hold the load without lowering the load. The RCE shall



2. Perform the test described in Section 4.A.2 above for the 100T test load. The RCE shall verify that the brakes were able to stop and hold the test load.

Signed: RCE/Date

3. Perform the test described in Section 4.A.3 above for the 100T test load. The RCE shall verify that during the lift and trolley/bridge movements, the crane operates smoothly and performs normally.

Signed: RCE/Date

#### C. 125 Ton Test Load

1. Perform the test described in Section 4.A.1 above for a 125T test load. The RCE shall verify that the crane is able to hold the load and that any adjustments have been completed. The RCE shall verify that the checklists and Test Sections 250.14 and 250.15 have been filled out.

Jack Bergman 1/26/85  
Signed: RCE/Date

2. Perform the test described in Section 4.A.2 above for the 125T test load. The RCE shall verify that the brakes were able to stop and hold the test load. The RCE shall verify that the checklists in Test Sections 250.14 and 250.15 have been filled out.

Jack Bergman 1/26/85  
Signed: RCE/Date

3. Perform the test described in Section 4.A.3 above for the 125T test load. The RCE shall verify that during the lift and trolley/bridge movements, the crane operates smoothly and performs normally. The RCE shall verify that the checklists in Test Sections 250.14 and 250.15 have been filled out.

Jack Bergman 1/26/85  
Signed: RCE/Date

#### 5.0 LOAD TEST FOR AUXILIARY HOIST

##### A. 6.25 Ton Test Load

1. Connect the auxiliary hoist hook to the 6.25 ton test load. Raise the test load approximately 3 ft. off of the 757'-6" floor using the slowest hook speed and stop the load and hold for approximately 5 minutes. The RCE shall verify that the brakes are able to hold the load without lowering the load. The RCE shall

ensure that the checklists on Test Sections 250.14 and 250.15 have been filled out.

J. Fay 12-30-84  
Signed: RCE/Date

2. Lower the test load using the slowest hook speed. After the hook speed has stabilized, stop the test load and ensure the brakes hold the load. The RCE shall verify that the brakes were able to stop and hold the test load. The RCE shall also verify that the checklists in Test Sections 250.14 and 250.15 have been filled out.

J. Fay 12-30-84  
Signed: RCE/Date

NOTE: It is not necessary to raise the 6.25 ton test load to the refuel floor. Lifting the test load close to the 757'-6" floor will sufficiently test the auxiliary hoist components.

Attachment:

- I Platform Fabrication/Testing and Test Weight Transportation/Arrangement

Figures:

- 1 Static Load Test Path for the New Crane Trolley
- 2 Test Weight Location on 757'-6" Floor

# Attachment I to Static Load Test Procedure

## PLATFORM FABRICATION/TESTING AND TEST WEIGHT TRANSPORTATION/ARRANGEMENT

FCR-1294-3 REV C

1. The test weights and associated lifting bails will be delivered to the DAEC. (Reference DCP Index Item 8.15) All required equipment will be provided to transfer the weights from the yard (Reference DCP Index Item 8.15). The transference of the weights from the area outside the fence to the yard, and from the yard to the reactor building shall be coordinated by the RCE.

AND 8.15  
14

FCR-1294-3 REV C

FCR-1294-3  
REV C

Note: One ~~of the~~ lifting bails ~~shall~~ <sup>SHOULD</sup> be used for loading of the test weights on the truck in the yard ~~and the other bail shall be used for unloading of weights and stacking them up in the reactor building.~~ (The heaviest single weight handled in this operation is - test weight # 50 29870 lbs ~~and bail # 132 lbs for 13,322 lbs. and 13,322 lbs.~~)

FCR-12  
REV C

2. The lifting platform and lifting slings have been designed to support the 125% load with a factor of safety of 10 to 1 as is required by NUREG 0612. A calculation (DCP Index Item 5.03) defines the platform design. The lifting platform will be supplied and fabricated in accordance with DCP Index Item 8.15. In accordance with ANSI Standard NI4.6-1978, an acceptance test will be performed on the platform. The platform will be subjected to a load test equal to 150% of the maximum load to which the device will be subjected.

Prior to the acceptance test on the platform, QC shall perform NDE (Liquid Penetrant or Magnetic Particle) on all welds where practicle. If weld is inaccessible, a visual examination should be performed on the weld. Inspections shall be in accordance with procedures defined in the Special Process Procedures Manual 1500 series (latest revision). Location for the testing should be coordinated with Design Engineering. QC and the RCE shall verify that all welds have been inspected and are acceptable.

W. Patman 12-17-84  
Signed: QC/Date

J. Gray 1-9-85  
Signed: RCE/Date

The load test will be conducted at FMC per DCP Index Item 8.15.

The RCE shall coordinate the platform testing with QC and FMC. The RCE shall verify that the platform has been tested with a load 150% greater than the expected maximum load (125T) and has successfully passed the test.

J. Gray 12-30-84  
Signed: RCE/Date

Subsequent to testing, QC shall perform NDE (Liquid Penetrant or Magnetic Particle) on all welds where practicle to verify their integrity. If a weld is inaccessible, a visual examination should be performed on the weld. The examinations shall be in accordance with procedures defined in the Special Process Procedures Manual 1500 Series (latest revision) QC and the RCE shall verify that all welds have been inspected and are acceptable.

W. Patman 12-19-84  
Signed: QC/Date

J. Gray 1-9-85  
Signed: RCE/Date

The slings for the platform will be furnished in accordance with DCP Index Item 8.15.0. Note that the platform will be used for the 125% load test and the 100% operational test for both the main and auxiliary hoist.

3. The allowable floor loading on the Reactor Building - 757'-6" level in the vicinity of the Equipment Hatch has been calculated (DCP Index Item 5.04). The floor can support the testing platform and weights in the location shown in attached Figure 2. The RCE shall ensure that the test weights and platform are located in this area during the 125% load test and the 100% operational test.
4. The recommended stacking sequences for the 5, 6.25, 50, 100 and 125 ton loads are listed below. It may be necessary for the RCE to coordinate the use of the tuning weights to obtain a more representative test weight.  
(Note: The actual weights are approximate due to the size of the individual test weights.)

A. Main Hoist

50 Ton Load

Sequence of  
Stacking

Weight No.      Weight (lbs.)

Sled	WITH SLINGS & SHACKLES	<del>4,752</del> 11,064
51		29,470
52		29,430
57		19,280
60		9,990
<del>66</del>		<del>5,150</del>
<del>70</del>		<del>2,030</del>
		<del>100,102</del>
		99,234

△ FCR-1294-3  
REV D

100 Ton Loading

Weight No.      Weight (lbs.)

Sled	WITH SLINGS & SHACKLES	<del>4,752</del> 11,064
51		29,470
52		29,430
54		29,430
56		20,680
59		20,370
75		20,299
77		20,240
57		19,280
<del>65</del>		<del>5,150</del>
<del>71</del>		<del>1,990</del>
		<del>201,091</del>
		200,263

△ FCR-1294-5  
REV 2

## 125 Ton Loading

<u>Weight No.</u>	<u>Weight (lbs.)</u>
Sled WITH SLINGS & SHACKLES	<del>4,752</del> 11,064
51	29,470
52	29,430
54	29,430
56	20,680
59	20,370
-75	20,299
77	20,240
57	19,280
50	29,670
<del>75-60</del>	<del>20,299</del> 9990
65	5,150
71	1,990
73	<del>251,868</del> 2000
	250,064

△ FCR-1294-3  
REV 0

### B. Auxiliary Hoist

#### 6.25 Ton

<u>Weight No.</u>	<u>Weight (lbs.)</u>
Sled WITH SLINGS & SHACKLES	<del>4,752</del> 6700
65	5,150
<del>70</del>	<del>2,038</del>
Tuning Weights	Approx. 600-650
	<del>12,532</del> 12500

△ FCR-1294-3  
REV 0

#### 5 Ton

<u>Weight No.</u>	<u>Weight (lbs.)</u>
Sled WITH SLINGS & SHACKLES	<del>4,752</del> 6700
<del>65-71</del>	<del>5,150</del> 1990
73 Tuning Weights	Approx. 100-2000
	<del>10,002</del> 10,450

△ FCR-1294-3  
REV 0

5. After the load and operational testing has been satisfactorily completed, the test weights shall be removed from the reactor building and placed in the yard. The weights and the bails will be returned to FMC at a later date per DCP Index Item 8.10. The RCE shall be responsible for coordinating the removal of the weights from the DAEC.

△ FCR-1294-3 REV 0

\* FOR THE AUXILIARY LOAD TEST, SLINGS FROM THE DAEC SUPPLY SHOULD BE USED.  
THE FOLLOWING SLINGS ARE RECOMMENDED:  
SLING NOS 312, 313, 424 AND 425. (STORED IN TURBINE AREA)  
EACH SLING IS 3/4" DIA, 20'-0" LONG AND RATED FOR 4.9 TONS.  
OTHER SETS OF SLINGS OF AT LEAST 12.5 TONS OR GREATER CAPACITY MAY BE USED IF ABOVE SLINGS ARE NOT AVAILABLE

# FIELD NOTE

## WEIGHTS USED FOR NST TEST

NO.	WEIGHT (Ks)
Sled	11,064
51	29,470
52	29,430
54	29,430
56	20,680
57	20,370
75	20,299
77	20,240
57	20,280
50	29,670
60	9,990
65	5,150
71	1,990
73	2,000
70	2,030
66	5,140
	<u>257,233</u>

## 125 Ton Loading

Weight No.	Weight (lbs.)
Sled	WITH SLINGS & SHACKLES 4,752 11,064
51	29,470
52	29,430
54	29,430
56	20,680
59	20,370
75	20,299
77	20,240
57	19,290
50	29,670
<del>75-60</del>	<del>20,299</del> 4990
65	5,150
71	1,990
	<u>251,060</u> 2000
73	<u>250,064</u>

FCR-1294-3  
REV 0

ACCEPTABLE WEIGHT RANGE WAS 250,000 - 260,000 Ks

## B. Auxiliary Hoist

### 6.25 Ton

Weight No.	Weight (lbs.)
Sled	WITH SLINGS & SHACKLES 4,752 6700
65	5,150
<del>70</del>	<del>2,030</del>
Tuning Weights	Approx. 600-650
	<u>12,532</u> 12500

FCR-1294-3  
REV 0

### 5 Ton

Weight No.	Weight (lbs.)
Sled	WITH SLINGS & SHACKLES 4,752 6700
<del>65-71</del>	<del>5,150-1990</del>
73 Tuning Weights	Approx. 100-2000
	<u>10,002</u> 10,450

FCR-1294-3  
REV 0

- After the load and operational testing has been satisfactorily completed, the test weights shall be removed from the reactor building and placed in the yard. The weights and the bails will be returned to FMC at a later date per DCP Index Item 8.10. The RCE shall be responsible for coordinating the removal of the weights from the DAEC.

FCR-1294-3 REV 0

FOR THE AUXILIARY LOAD TEST, SLINGS FROM THE DAEC SUPPLY SHOULD BE USED.  
THE FOLLOWING SLINGS ARE RECOMMENDED:  
SLING N'S 312, 313, 424 AND 425. (STORED IN TURBINE AREA)  
EACH SLING IS 3/4" DIA, 20'-0" LONG AND RATED FOR 4.9 TONS.  
OTHER SETS OF SLINGS OF AT LEAST 125 TONS, OR GREATER CAPACITY MAY BE USED IF ABOVE SLINGS ARE NOT AVAILABLE.

FIGURE 1

STATIC LOAD TEST PATH FOR THE NEW  
CRANE TROLLEY (50, 100, & 125 TON LOADS)


→  
LOAD PATH

LOAD SHALL BE  
KEPT AS CLOSE  
TO THE FLOOR  
AS POSSIBLE WHILE  
MOVING ON THE  
REFUEL FLOOR

LOAD PATH SHOULD  
BE FOLLOWED AS  
CLOSE AS PRACTICAL.

POINTS A & B ARE THE  
TRAVEL LIMITS OF THE  
TROLLEY ON THE BRIDGE

THIS AREA IS INACCESSIBLE  
TO THE TEST LOAD DUE  
TO EQUIP

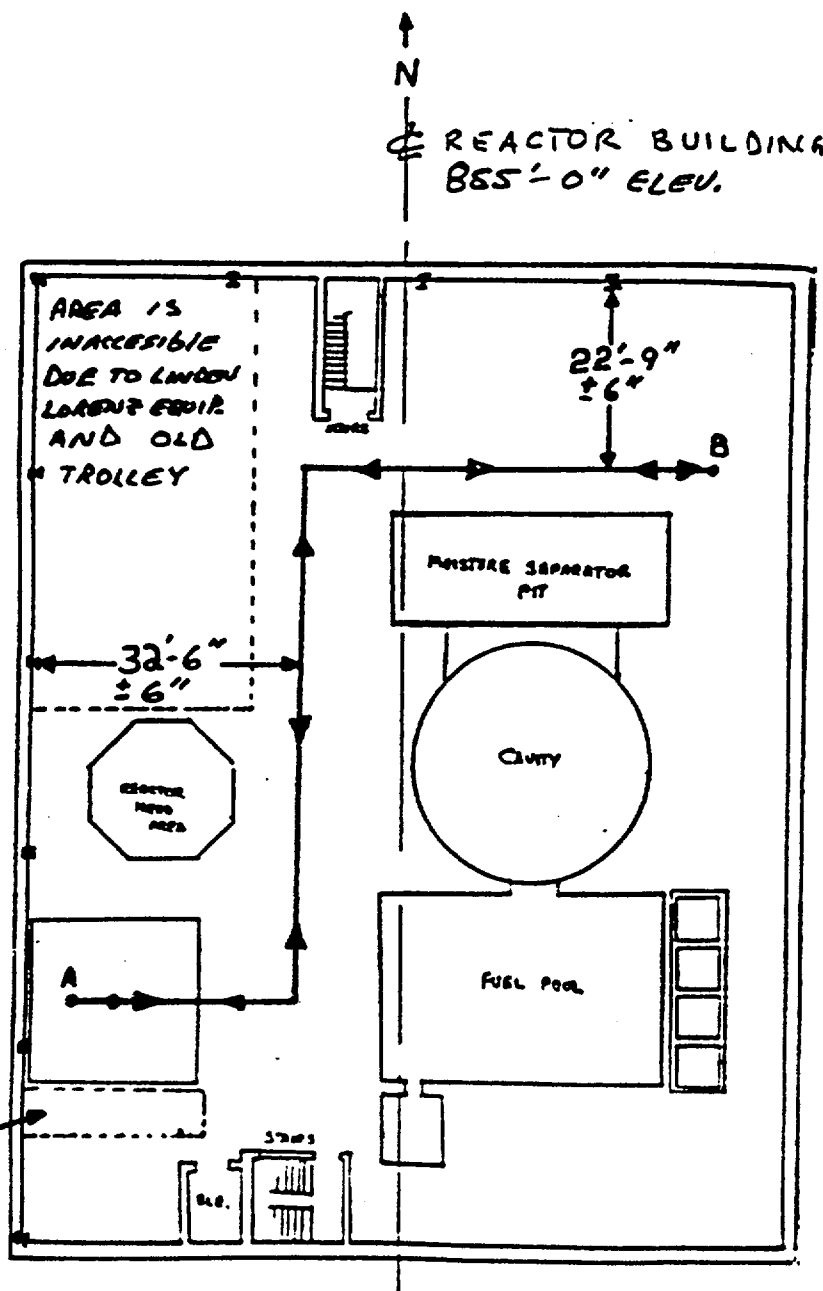

NOTE: USE  
MINIMUM SPEEDS  
FOR BRIDGE AND  
TROLLEY WHEN  
HOISTING AND  
MOVING ANY  
TEST LOAD.

LOAD PATH IS  
SHOWN FOR  
CENTER OF  
TEST LOAD

LOAD CANNOT BE  
BROUGHT DOWN EAST  
SIDE DUE TO  
CLEARANCES BETWEEN  
MOISTURE SEP. PIT  
AND FUEL POOL

DEPT. \_\_\_\_\_  
PROJECT \_\_\_\_\_ Sheet No. 2 of 4  
SUBJECT \_\_\_\_\_  
Compared by Joe P. Jordan Date 11/27/84 Checked by NEJ Date 12/2/84

N  
↑

