



Mr. E. William Brach
Director, Spent Fuel Project Office
Office of Nuclear Material Safety and Safeguards, NMSS
U.S. Nuclear Regulatory Commission
Washington, DC 20555

Dear Mr. Brach:

Subj: Safety Analysis Report for the CNS 10-160B, C of C 9204, Rev. 15

Enclosed is our application for the revision to the Safety Analysis Report (SAR) for the CNS 10-160B, Certificate of Compliance (CofC) No. 9204. We request that the maximum radioactive contents for the CNS 10-160B be increased from 2000 times the Type A quantity to 3000 times a Type A quantity, which per Regulatory Guide 7.11, is the radioactivity limit for a Category II package. The changes to the SAR include the following:

- Revision to Chapter 1 of the SAR to specify the maximum radioactive contents for the CNS 10-160B as 3000 times a Type A quantity.
- Revision to the containment leak rate calculations of Chapter 4 to reflect an increase in the source term from 2000 to 3000 times a Type A quantity.
- Revision to Chapter 4 incorporating a number of editorial changes to correctly identify penetrations of the containment boundary and describe the lid seals.

All changes are indicated by a revision bar in the margin.

There are two attachments to this letter. The following is a discussion of the content and purpose of each attachment.

Attachment 1: The replacement pages for the SAR

- Cover Page
- Table of Contents
- Chapter 1, page 1-4
- Chapter 4, pages 4-1 through 4-28

Attachment 2: A justification for the requested change including a section by section discussion of the affect on the SAR.

We request completion of action on this request for Rev. 17 by April 2001. One user of the cask plans to ship TRU wastes (the subject of the submittal for Revision 16) in the second quarter of 2001 to meet their decommissioning schedule. NRC action on this application is requested in early 2001 to allow sufficient time for development of alternative shipping options should the requested revision be denied. The request for Rev. 16 to the CNS 10-160B SAR is currently under NRC review.

Should you or members of your staff have any questions about the application, please contact Mark Whittaker at (803)758-1898.

Sincerely,

Patrick L. Paquin
General Manager – Engineering & Licensing

Attachments:

1. Rev. 17 Change Pages
2. Justification for change

NMSSCIRP/HC

ATTACHMENT 1

Revision 17 Changed Pages

Cover
Table of Contents
1-4
4-1 – 4-28

***Please replace current revision pages with the attached pages**

SAFETY ANALYSIS REPORT
FOR
CHEM-NUCLEAR SYSTEMS
MODEL CNS 10-160B
TYPE B RADWASTE SHIPPING CASK

REVISION 17

January 2001

CHEM-NUCLEAR SYSTEMS
CORPORATE HEADQUARTERS
140 STONERIDGE DRIVE
COLUMBIA, SOUTH CAROLINA 29210




TABLE OF CONTENTS

1.0	<u>GENERAL INFORMATION</u>	
1.1	Introduction.....	1-1
1.2	Package Description	1-1
1.2.1	Packaging	1-1
1.2.1.1	Containment Vessel.....	1-2
1.2.1.2	Neutron Absorbers.....	1-2
1.2.1.3	Package Weight	1-2
1.2.1.4	Receptacles	1-2
1.2.1.5	Vent, Drain, Test Ports and Pressure Relief Systems	1-2
1.2.1.6	Lifting Devices	1-2
1.2.1.7	Tie-Downs	1-3
1.2.1.8	Heat Dissipation	1-3
1.2.1.9	Coolants	1-3
1.2.1.10	Protrusions	1-3
1.2.1.11	Shielding	1-3
1.2.2	Operational Features	1-3
1.2.3	Contents of Packaging.....	1-3
1.2.3.1	Cask Contents.....	1-4
1.2.3.2	Waste Forms	1-4
1.3	Appendix – CNS 10-160B Shipping Cask Drawing.....	1-6
2.0	<u>STRUCTURAL EVALUATION</u>	
2.1	Structural Design.....	2-1
2.1.1	Discussion	2-1
2.1.1.1	Containment Vessel.....	2-1
2.1.1.2	Shielding.....	2-2
2.1.1.3	Impact Limiters	2-2
2.1.1.4	Summary	2-2

TABLE OF CONTENTS (CONTINUED)

2.1.2	Design Criteria.....	2-2
2.1.2.1	Normal and Accident Conditions of Transport.....	2-2
2.1.2.2	Tie-Downs and Lifting Devices	2-8
2.2	Weights and Centers of Gravity	2-9
2.3	Mechanical Properties of Material	2-10
2.4	General Standards for all Packages	2-10
2.4.1	Chemical and Galvanic Reactions.....	2-10
2.4.2	Positive Closure	2-10
2.4.3	Lifting Devices.....	2-15
2.4.4	Tie-Downs.....	2-25
2.4.4.1	Tie-Down Evaluation.....	2-27
2.4.4.2	Tie-Down Stress Evaluation.....	2-32
2.4.4.3	Stresses in the Welds.....	2-32.3
2.5	Standards for Type B and Large Quantity Packaging	2-32.3
2.6	Normal Conditions of Transport	2-33
2.6.1	Heat	2-33
2.6.2	Cold	2-33
2.6.3	Pressure	2-37
2.6.4	Vibration	2-37
2.6.5	Water Spray	2-37
2.6.6	Free Drop	2-37
2.6.6.1	End Drop.....	2-41
2.6.6.2	Side Drop	2-41
2.6.6.3	Corner Drop	2-41
2.6.7	(Successive) Corner Drop.....	2-41
2.6.8	Penetration.....	2-45
2.7	Hypothetical Accident Condition	2-46
2.7.1	Free Drop	2-46

TABLE OF CONTENTS (CONTINUED)

2.7.1.1	Free Drop Impact – End Drop	2-47
2.7.1.1.1	End Drop Lid Bolt Forces	2-51
2.7.1.1.2	End Drop Primary Lid Bolt Forces	2-51
2.7.1.1.3	Lead Slump	2-54
2.7.1.2	Free Drop Impact – Side Drop	2-54
2.7.1.3	Free Drop Impact – Corner Drop	2-64
2.7.1.4	Oblique Drop	2-70
2.7.1.5	Impact Limiter Attachment Forces	2-72.1
2.7.2	Puncture	2-73
2.7.2.1	Sides	2-73
2.7.2.2	Ends	2-74.1
2.7.3	Thermal	2-75
2.7.3.1	Summary of Pressures and Temperatures	2-75
2.7.3.2	Differential Thermal Expansion	2-75
2.7.3.3	Stress Calculation	2-75
2.7.4	Water Immersion	2-77
2.7.5	Summary of Damage	2-77
2.8	Special Form	2-77
2.9	Fuel Rods	2-79
2.10	Appendix to Section 2.0	2-80
2.10.1	Analytical Methods	2-81
2.10.1.1	General Discussion Foam Impact Limiter	2-81
2.10.1.2	Cask Drop Computer Model	2-82
2.10.1.2.1	End Drop Model	2-82
2.10.1.2.2	Side Drop Model	2-84
2.10.1.2.3	Corner Drop	2-84
2.10.1.3	Impact Limiter Chamfer	2-96
2.10.2	ANSYS Finite Element Analysis	2-101

TABLE OF CONTENTS (continued)

2.10.2.1	Finite Element Model Discussion.....	2-101
2.10.2.2	Finite Element Model Internal Constraints	2-120
2.10.2.3	Finite Element Model Boundary Conditions	2-120
2.10.2.4	Finite Element Model Solution Techniques	2-125
2.10.2.5	Loading	2-135
2.10.2.6	Stress Linearization.....	2-144
2.10.3	Data Reduction of Cask Structural Computation Results	2-146
2.10.3.1	Results of 3-Dimensional Linear Model.....	2-146
2.10.3.2	Results of 2-Dimensional Nonlinear Model.....	2-146
2.10.4	References for Chapter 2	2-191
	Attachment 1	
	Attachment 2	
	Attachment 3	
	Attachment 4	
	Attachment 5	
3.0	<u>THERMAL EVALUATION</u>	
3.1	Discussion	3-1
3.2	Summary of Thermal Properties of Materials	3-5
3.3	Technical Specification of Components	3-5
3.4	Thermal Evaluation for Normal Conditions of Transport	3-7
3.4.1	Thermal Model	3-7
3.4.1.1	Analytical Model	3-7
3.4.1.2	Test Model	3-10
3.4.2	Maximum Temperatures	3-10
3.4.3	Minimum Temperatures	3-10
3.4.4	Maximum Internal Pressures	3-10
3.4.5	Maximum Thermal Stress	3-11
3.4.6	Evaluation of Package Performance for Normal Conditions of Transport	3-11
3.5	Hypothetical Accident Thermal Evaluation.....	3-12
3.5.1	Thermal Model	3-12
3.5.1.1	Analytical Model	3-12
3.5.1.2	Test Model	3-13

TABLE OF CONTENTS (CONTINUED)

3.5.2	Package Conditions and Environment	3-13
3.5.3	Package Temperatures	3-13
3.5.4	Maximum Internal Pressures	3-18
3.5.5	Maximum Thermal Stresses	3-18
3.5.6	Evaluation of Package Performance for the Hypothetical Accident Conditions	3-19
3.6	References	3-20
4.0	<u>CONTAINMENT</u>	
4.1	Containment Boundary	4-1
4.1.1	Containment Vessel	4-1
4.1.2	Containment Penetration	4-1
4.1.3	Welds	4-1
4.1.4	Closure and Seals	4-1
4.2	Containment Requirements for Normal Conditions of Transport	4-2
4.2.1	Leakage Test Requirements	4-2
4.2.2	Pressurization of the Containment Vessel	4-6
4.2.3	Coolant Containment	4-6
4.2.4	Coolant Loss	4-6
4.3	Containment Requirements for Hypothetical Accident Conditions	4-6
4.3.1	Leakage Test Requirements	4-6
4.4	Determination of Test Conditions for Assembly Verification Leak Test	4-8
4.4.1	Maximum Permissible Leak Rate at Standard Conditions	4-8
4.4.2	Detector Sensitivity – Test Conditions	4-9
4.4.3	Required Charge Pressure at the Test Temperature	4-10

TABLE OF CONTENTS (CONTINUED)

4.5	Periodic Verification Leak Rate Determination Using R-12 Test Gas	4-10
4.5.1	Introduction	4-10
4.5.2	Detector Sensitivity Calculation – Test Conditions.....	4-11
4.6	Periodic Verification Leak Rate Determination using Helium Test Gas	4-16
4.6.1	Introduction	4-16
4.6.2	Detector Sensitivity Calculation – Test Conditions.....	4-17
4.7	Periodic Verification Leak Rate Determination Using R-134a Test Gas	4-21
4.7.1	Introduction	4-21
4.7.2	Detector Sensitivity Calculation – Test Conditions.....	4-21
4.8	Combustible Gas Generation Safety Assurance	4-26
4.9	References	4-27
4.10	Appendices	4-29
4.10.1	Properties of R-134a	4-30
4.10.2	Transuranic (TRU) Waste Compliance Methodology for Hydrogen Gas Generation ..	4-31
5.0	<u>SHIELDING EVALUATION</u>	5-1
5.1	Discussion and Results	5-1
5.1.1	Operating Design	5-1
5.1.2	Shielding Design Features	5-1
5.1.3	Maximum Dose Rate Calculations.....	5-2
5.1.3.1	Normal Conditions.....	5-2
5.1.3.2	Accident Conditions.....	5-2
5.1.4	Transport Index	5-2
5.2	Source Specifications.....	5-3
5.2.1	Gamma Source	5-3
5.2.2	Neutron Source	5-3
5.3	Model Specification.....	5-4
5.3.1	Description of Radial and Axial Shielding Configuration	5-4
5.3.2	Shield Region Densities	5-6

TABLE OF CONTENTS (CONTINUED)

5.4	Shielding Evaluation	5-6
5.4.1	Radial Model	5-6
5.4.2	Axial Model	5-10
5.4.3	Accident Conditions	5-13
5.5	References	5-14
6.0	<u>CRITICALITY EVALUATION</u>	
7.0	<u>OPERATING PROCEDURES</u>	
7.1	Procedure for Loading the Package	7-1
7.2	Procedure for Unloading the Package	7-6
7.3	Preparation of Empty Packages for Transport	7-7
7.4	Procedures for Shipment of Packages Which Generate Combustible Gases	7-8
7.4.1	Combustible Gas Control Inerting	7-8
7.4.2	Combustible Gas Suppression	7-9
8.0	<u>ACCEPTANCE TESTS AND MAINTENANCE</u>	
8.1	ACCEPTANCE TESTS	8-1
8.1.1	Visual Examination	8-1
8.1.2	Structural Tests	8-1
8.1.3	Leak Tests	8-2
8.1.4	Component Tests	8-3
8.1.5	Tests for Shielding Integrity	8-3
8.1.6	Thermal Acceptance Tests	8-3
8.1.7	Impact Limiter Foam	8-3
8.1.8	Pressure Tests	8-3
8.2	Maintenance Program	8-4
8.2.1	Routine Maintenance	8-4
8.2.1.1	Fasteners	8-4
8.2.1.2	Gaskets and Seals	8-5
8.2.1.3	Painted Surfaces, Identification Markings, and Match Marks used for Closure Orientation	8-6

TABLE OF CONTENTS (CONTINUED)

8.2.2	Periodic Maintenance	8-6
8.2.2.1	Periodic Leak Tests.....	8-6
8.2.2.2	Assembly Verification Leak Test.....	8-7
8.2.2.3	Ratchet Binders	8-8
8.2.3	Subsystem Maintenance	8-8
8.2.4	Valves, Rupture Discs and Gaskets	8-9
8.2.5	Shielding	8-9
8.3	Appendix	
8.3.1	Polyurethane Foam Specification ES-M-172.....	8-10

LIST OF TABLES

<u>TABLE NO.</u>	<u>DESCRIPTION</u>
2-1	Summary of Normal and Accident Condition Loading 2-3
2-2	Mechanical Properties of Materials used in Fabrication of 10-160B Cask 2-11
2-3	Material Properties Versus Temperature 2-12
2-4	Primary Stress Intensity Allowables 2-13
2-5	Stress Summary of Lift Lugs and Welds 2-17
2-5.1	Stress Summary of Tie-Downs 2-26
2-5A	Nil Ductivity Temperatures Requirements for Fracture Critical Components of the 10-160B Cask 2-36
2-6	Maximum Stress Intensities in Cask Components Hypothetical Accident – 1-ft End Drop 2-42
2-7	Maximum Stress Intensities in Cask Components Hypothetical Accident – 1-ft Side Drop 2-43
2-8	Maximum Stress Intensities in Cask Components Hypothetical Accident – 1-ft Corner Drop 2-44
2-9	Caskdrop Program Output for End Drop (Soft Foam) 2-48
2-10	Caskdrop Program Output for End Drop (Hard Foam) 2-49
2-11	Maximum Stress Intensities in Cask Components Hypothetical Accident – 30-ft End Drop 2-50
2-12	10-160B Cask – End Drop Analysis Secondary – Lid Bolt Loading 2-53
2-13	Caskdrop Program Output for Side Drop (Soft Foam) 2-55
2-14	Caskdrop Program output for Side Drop (Hard Foam) 2-56
2-15	Maximum Stress Intensities in Cask Components Hypothetical Accident – 30-ft Side Drop 2-57
2-16 (a)	10-160B – Side Drop Analysis Secondary Lid Bolt Loading 2-62
2-16 (b)	10-160 B – Side Drop Analysis Primary Lid Bolt Loading 2-63
2-17	Not Used

LIST OF TABLES (CONTINUED)

<u>TABLE NO.</u>	<u>DESCRIPTION</u>	
2-18	Caskdrop Program Output for Corner Drop (Soft Foam)	2-65
2-19	Caskdrop Program Output for Corner Drop (Hard Foam)	2-66
2-20	Maximum Stress Intensities in Cask Components Hypothetical Accident – 30 Foot Corner Drop	2-67
2-21 (a)	10-160B Cask – Corner Drop Analysis Secondary Lid Bolt Loading	2-71
2-21 (b)	10-160B Cask – Corner Drop Analysis Primary Lid Bolt Loading	2-72
2-21	Not used	
2-22	Not Used	
2-23	Not Used	
2-24	Not Used	
2-25	Summary of Largest Secondary Stress Intensity in 10-160B Cask Under Fire Accident	2-76
2-26	Summary of Largest Primary Stress Intensity in 10-160B Cask Under Hypothetical Condition	2-78
A2-1	10-160B Cask Finite Element Model Substructure Detail	2-104
A2-2	Material Properties Used in the Drop Analysis	2-105
A2-3	Constraint Reactions – 30' End Drop	2-126
A2-4	Constraint – 30' Side Drop	2-127
A2-5	Constraint Reactions – 30' Corner Drop	2-128
A2-6	Summary of Distribution of Various Loading Over the Cask Components Under Different Drop Conditions	2-136
A2-7	Side Drops Crush Planes Forces	2-137
A2-8	Corner Drops Crush Planes Forces	2-142
A2-9	Unit Load Vectors Used for Various Substructures	2-143
A2-10	Membrane Stresses in Various Components of the Cask End Drop (30-foot)	2-147
A2-11	Membrane Plus Bending Stresses in Various Components of the Cask End Drop (30-foot)	2-148

LIST OF TABLES (CONTINUED)

<u>TABLE NO.</u>	<u>DESCRIPTION</u>
A2-12	Maximum Stress Intensities in the Cask Due to 30-ft End Drop 2-150
A2-13	Stress Intensity Combinations Due to 30-ft End Drop 2-151
A2-14	Membrane Stresses in Various Components of the Cask 30-ft Side Drop 2-152
A2-15	Membrane Plus Bending Stresses in Various Components Of the Cask 30-ft Side Drop..... 2-154
A2-16	Maximum Stress Intensities in the Cask Due to 30-ft Side Drop 2-156
A2-17	Stress Intensity Combinations due to 30-ft Side Drop 2-157
A2-18	Membrane Stresses in Various Components of the Cask 30-ft Corner Drop..... 2-158
A2-19	Membrane Plus Bending Stresses in Various Components Of the Cask 30-ft Corner Drop..... 2-160
A2-20	Maximum Stress Intensities in the Cask Due to 30-ft Corner Drop..... 2-162
A2-21	Stress Intensity Combinations Due to 30-ft Corner Drop 2-163
A2-22	Maximum Stress Intensities in the Cask due to 1-ft End Drop..... 2-164
A2-23	Stress Intensity Combinations due to 1-Ft End Drop..... 2-165
A2-24	Maximum Stress Intensities in the Cask Due to 1-ft Side Drop 2-166
A2-25	Stress Intensity Combinations due to 1-Ft Side Drop 2-167
A2-26	Maximum Stress Intensities in the Cask Due to 1-ft Corner Drop 2-168
A2-27	Stress Intensity Combinations due to 1-ft Corner Drop 2-169
A2-28	Intentionally Left Blank 2-170

LIST OF TABLES (CONTINUED)

<u>TABLE NO.</u>	<u>DESCRIPTION</u>
A2-29	Membrane Stresses in Various Components of the Cask Cold Environment 2-174
A2-30	Membrane Plus Bending Stresses in Various Components Of the Cask Cold Environment..... 2-175
A2-31	Membrane Stresses in Various Components of the Cask Hot Environment 2-176
A2-32	Membrane Plus Bending Stresses in Various Components Of the Cask Hot Environment 2-177
A2-33	Membrane Stresses in Various Components of the Cask Increased External Pressure 2-178
A2-34	Membrane Plus Bending Stresses in Various Components Of the Cask Increased External Pressure 2-179
A2-35	Membrane Stresses in Various Components of the Cask Minimum External Pressure 2-180
A2-36	Membrane Plus Bending Stresses in Various Components of The Cask Minimum External Pressure 2-181
A2-37	Membrane Stresses in Various Components of the Cask Internal Pressure of 10 Psig 2-182
A2-38	Membrane Plus Bending Stresses in Various Components of the Cask Internal Pressure of 10 PSIG 2-184
A2-39	Membrane Stresses in Various Components of the Cask External Pressure of 25 PSIG 2-185
A2-40	Membrane Plus Bending Stresses in Various Components Of the Cask External Pressure of 25 PSIG 2-186
A2-41	Membrane Stresses in Various Components of the Cask Fire Accident..... 2-187
A2-42	Membrane Plus Bending Stresses in Various Components of the Cask Fire Accident..... 2-190
3.1	Summary of Thermal Results..... 3-2
3.2	Summary of Initial Conditions & Assumptions 3-4

LIST OF TABLES (CONTINUED)

<u>TABLE NO.</u>	<u>DESCRIPTION</u>
3.3 (a)	Temperature – Independent Thermal Properties 3-5
3.3 (b)	Temperature Dependent Thermal Properties 3-6
3.4	Summary of Maximum Hypothetical Accident Temperatures Accident Temperatures 3-15
4.1	Bolt and Cap Screw Torque Requirements 4-2
5.1	Summary of Maximum Dose Rates 5-2

LIST OF FIGURES

<u>FIGURE NO.</u>	<u>DESCRIPTION</u>
1-1	CNS 10-160B General Arrangement 1-5
2-1.1	Constituted Stress-Strain Curve For A516 GR.70 2-7-5
2-1	Compressive Stress-Strain Curve for Foam 2-14
2-2	Cask Lift Lug 2-16
2-3	Top View Tie-Down Arrangement 2-28
2-4	Tie-Down Lug Detail 2-32.1
2-9	Fracture Critical Components 2-34
2-9A	Design Chart for Category 11 Fracture Critical Components 2-35
2-10	1-Foot End Drop CASKDROP Printout 2-38
2-11	1-Foot Side Drop CASKDROP Printout 2-39
2-12	1-Foot Corner Drop CASKDROP Printout 2-40
2-13	End-Drop – Stress Intensity Contour Plot Secondary Lid 2-52
2-14	Side Drop – Stress Intensity Contour Plot Bolt Ring 2-58
2-15	Side Drop – Stress Intensity Contour Plot Primary Lid 2-59
2-16	Side Drop – Stress Intensity Contour Plot Lower Shell 2-60
2-17	Corner Drop – Stress Intensity Contour Plot Bolt Ring 2-68
2-18	Corner Drop – Stress Intensity Contour Plot Primary Lid 2-69
2-18.1	Load Distribution During the Puncture Accident..... 2-74.4
A2-1	End Drop – Region Definition 2-83
A2-2	Side Drop – Circumferential Load Distribution 2-85
A2-3	Side Drop – Variable Definition 2-86
A2-4	Side Drop – Region Definition 2-87
A2-5	Corner Drop – Crush Plane and Grid 2-88
A2-6	Corner Drop – Regions Along Center Line 2-90
A2-7	Corner Drop – Payload Inertia Distribution 2-92
A2-8	Upper Impact Limiter Inertia Distribution 2-93
A2-9	Corner Drop – Regions Along Cask Centerline..... 2-94
A2-10	Chamfer Geometry..... 2-97
A2-11	Corner Drop – Chamfer Effect..... 2-100

LIST OF FIGURES (Continued)

<u>FIGURE NO.</u>	<u>DESCRIPTION</u>
A2-12	Finite Element Model – Substructure Overview 2-102
A2-13	Substructure No. 1 – Node Numbers 2-106
A2-14	Substructure No. 2 – Node Numbers 2-107
A2-15	Substructure No. 3 – Node Numbers 2-108
A2-16	Substructure No. 4 – Node Numbers 2-109
A2-17	Substructure No. 5 – Node Numbers 2-110
A2-18	Substructure No. 6 – Node Numbers 2-111
A2-19	Substructure No. 7 – Node Numbers 2-112
A2-20	Substructure No. 1 – Element Numbers 2-113
A2-21	Substructure No. 2 – Element Numbers 2-114
A2-22	Substructure No. 3 – Element Numbers 2-115
A2-23	Substructure No. 4 – Element Numbers 2-116
A2-24	Substructure No. 5 – Element Numbers 2-117
A2-25	Substructure No. 6 – Element Numbers 2-118
A2-26	Substructure No. 7 – Element Numbers 2-119
A2-27	Internal Constraints Used in ANSYS Drop Analyses 2-121
A2-28	Boundary Conditions – End Drop 2-122
A2-29	Boundary Conditions – Side Drop 2-123
A2-30	Boundary Conditions – Corner Drop 2-124
A2-31	Flow Diagram – Substructure Generation Analysis 2-130
A2-32	Flow Diagram – Substructure Node No. Transformation 2-131
A2-33	Flow Diagram – Cask Drop Analysis 2-132
A2-34	Flow Diagram – Substructure Node No. Retransformation 2-133
A2-35	Flow Diagram – Substructure Stress Pass 2-134
A2-36	Load Distribution – End Drop 2-138
A2-37	Load Distribution – Side Drop 2-139
A2-38	Load Distribution – Corner Drop 2-140
A2-39	Linearization of Finite Element Stress Results 2-145
A2-40	Location of Stresses Indicated in Tables A2-10 and A2-11 2-149

LIST OF FIGURES (Continued)

<u>FIGURE NO.</u>	<u>DESCRIPTION</u>
A2-41	Locations of Stresses Indicated in Table A2-14 2-153
A2-42	30-Ft Side Drop Locations of Stresses Indicated in Table A2-15 2-155
A2-43	30-Ft Corner Drop Locations of Stresses Indicated in Table A2-18 2-159
A2-44	30-Ft Corner Drop Locations of Stresses Indicated in Table A2-19 2-161
A2-44.1	Two-Dimensional Finite Element Model Used in the Analysis of 10-160B Cask Under Axisymmetric Loading 2-171
A2-45	Locations of Stresses Indicated in Tables A2-29 Through A2-36 2-173
A2-46	Locations of Stresses Indicated in Tables A2-37 Through A2-40 2-183
A2-47	Fire Accident Temperature Distribution 2-188
A2-48	Fire Accident Locations of Stresses Indicated in Table A2-41 and A2-42 2-189
3.1	Location of Components Analyzed in Thermal Design 3-3
3.2	Node and Element Locations in the CNS 10-160B Cask Thermal Finite Element Model 3-8
3.3	Transient Fire Analysis – Load Step and Boundary Conditions Schematic 3-14
3.4	Hypothetical Accident – Fire Transient: Temperature Versus Time 3-16
3.5	Hypothetical Accident – Cooldown: Temperature Versus Time 3-17
4.1	Allowable R-12/Air Mixture Test Leakage, cm ³ /sec, versus test temperature deg. F 4-13
4.2	Allowable R-12 test leakage, cm ³ /sec versus test temperature, deg. F 4-14
4.3	Allowable R-12 test leakage, oz/yr, versus test temperature, deg. F 4-15
4.4	Allowable R-12 test leakage sensitivity, oz/yr, versus test temperature, deg. F 4-15

LIST OF FIGURES (Continued)

<u>FIGURE NO.</u>	<u>DESCRIPTION</u>
4.5	Allowable He/Air Mixture Test Leakage, cm^3/sec , versus test temperature, deg. F 4-18
4.6	Allowable Helium test leakage, cm^3/sec versus test temperature, deg. F 4-19
4.7	Allowable helium test leakage, oz/yr, versus test temperature, deg. F 4-20
4.8	Allowable helium test leakage sensitivity, oz/yr, versus test temperature, deg. F 4-20
4.9	Allowable R134a/Air Mixture Test Leakage, cm^3/sec , versus test temperature, deg. F 4-23
4.10	Allowable R-134a test leakage, cm^3/sec versus test temperature, deg. F 4-24
4.11	Allowable R134a test leakage, oz/yr, versus test temperature, deg. F 4-25
4.12	Allowable R134a test leakage sensitivity, oz/yr, versus test temperature, deg. F 4-25
5.2	Radial and Axial Shielding Models 5-5
5.3	Dose Rate Versus Point Source Strength – Side of Cask 5-9
5.4	Dose Rate Versus Point Source Strength – Top/Bottom of Cask 5-12

The contents of the cask will consist of:

- 1) Greater than Type A quantities (up to a maximum of 3000 A₂) of radioactive material in the form of solids or dewatered materials in secondary containers.
- 2) Greater than Type A quantities (up to a maximum of 3000 A₂) of radioactive material in the form of activated reactor components or segments of components of waste from a nuclear power plant.
- 3) That quantity of any radioactive material which does not exceed 3000 A₂ and which does not generate spontaneously more than 100 thermal watts of radioactive decay heat.
- 4) The weight of the contents in the cask cavity will be limited to 14,500 lbs. If an insert is installed in the cavity, the maximum payload is reduced by the weight of the insert.

1.2.3.2 Waste Forms

The type and form of waste material will include:

- 1) By-product, source, or special nuclear material consisting of process solids or resins, either dewatered, solid, or solidified in secondary containers. (See Section 4.2.1 for specific limitations). TRU wastes are limited as described in Appendix 4.10.2, Transuranic (TRU) Waste Compliance Methodology for Hydrogen Gas Generation.
- 2) Neutron activated metals or metal oxides in solid form.
- 3) Miscellaneous radioactive solid waste materials.

4. CONTAINMENT

This chapter describes the containment configuration and test requirements for the CNS 10-160B Cask. Both normal conditions of transport and hypothetical accident conditions are discussed.

4.1 Containment Boundary

4.1.1 Containment Vessel

The package containment vessel is defined as the inner shell of the shielded transport cask and the primary and secondary lids together with the associated o-ring seals and lid closure bolts. The inner shell of the cask, or containment vessel, consists of a right circular cylinder of 68 inches inner diameter and 77 inches inside height (nominal dimensions). The shell is fabricated of an outer shell of 2-inch thick steel plate, a 1 7/8 inch layer of lead, and an inner shell of 1 1/8 – inch thick steel. The cylindrical shell is attached at the base to a circular end plate construction with full penetration welds. The primary lid is attached to the cask body with 24, 1 3/4 inch 8 UN bolts. A secondary lid covers the 31 inch opening in the primary lid and is attached to the primary lid using 12, 1 3/4 inch 8 UN bolts. See Section 4.1.4 for closure details.

4.1.2 Containment Penetrations

There are two penetrations of the containment vessel. These are (1) an optional drain line, and (2) an optional cask vent port located in the secondary lid. The drain line is located at the cask base and consists of a 1/2 inch diameter hole drilled into the stainless steel cask bottom. The drain line is sealed by a plug with a seal at its outer opening. An optional vent port penetrates the secondary lid into the main cask cavity. The vent and drain port penetrations are sealed with silicone Parker Stat-o-Seals or self-sealing type Teflon-coated hex socket plugs.

4.1.3 Welds

The containment vessel is fabricated from steel using full penetration welds.

4.1.4 Closure and Seals

The primary lid closure consists of a two layer steel plate construction, stepped to fit over and within the top edge of the cylindrical body. The lid is supported at the perimeter of the cylindrical body by a 3.00-inch thick plate (bolt ring) welded to the top of the inner and outer cylindrical body walls. The lid confines two (2) solid, high temperature silicone o-rings (Parker or equivalent) in machined grooves. Groove dimensions prevent over-compression of the o-rings by the lid closure bolt preload forces and hypotheti-

cal accident preload forces. The primary lid is attached to the cask body by 24 bolts. The primary lid is fitted with a secondary lid of similar construction attached with 12 bolts. The secondary lid is also sealed with two (2) solid, high temperature silicone o-rings (Parker or equivalent) in machined grooves. Only the inner o-ring of each lid is part of the containment boundary.

The optional vent penetration, test ports, and drain penetrations are sealed as described in Section 4.1.2. The seal plugs in these penetrations are lockwired prior to each shipment. Table 4.1 gives the torque values for bolts and cap screws.

Table 4.1
Bolt and Cap Screw Torque Requirements

Location	Size	Torque Values +/- 10% (Lubricated)	
		In-lb	Ft-lb
Test Ports (2)	1/2 NPT	144	12
Primary Lid	1-3/4 inch, 8 UN	3600	300
Second Lid	1-3/4 inch, 8 UN	3600	300
Vent Port*	1/2 - 20 UNF	240	20
Drain Port*	1/2 - 20 UNF	240	20

*Optional - These ports may not be installed on cask.

4.2 Containment Requirements for Normal Conditions of Transport

4.2.1 Leak Test Requirements

The CNS 10-160B cask is designed, fabricated, and leak tested to preclude a release of radioactive material in excess of the limits prescribed in NRC Regulatory Guide 7.4, paragraph C and 10CFR71.51(a)(1). The limits on leakage during normal conditions of transport are defined by 10CFR71.51(a)(1).

The leak test procedure must be able to detect leaks of 3.25×10^{-6} atm-cm³/sec (based on dry air at 25°C with a pressure differential of one atmosphere) to assure compliance with 10CFR71.51(a)(1). A description of the calculational procedure used to determine this value follows.

10CFR71.51(a)(1) states the containment requirements for normal conditions of transport as:

...no loss or dispersal of radioactive contents, as demonstrated to a sensitivity of 10^{-6} A₂ per hour, no significant increase in external radiation levels, and no substantial reduction in the effectiveness of the packaging;

ANSI N14.5-1997 (Reference 4) states that the permissible leak rate shall be determined by equation 1 (below):

$$\text{(Equation 1)} \quad L = \frac{R}{C}$$

where:

L = permissible volumetric leak rate for the medium

R = package containment requirement (Ci/sec)

C = activity per unit volume of the medium that could escape from the containment system

In Section 3.4.4, it is noted that the saturated water vapor in equilibrium at 168 degrees-F and 8.4 psig could exist within the internal shipping containers (liners or drains). It is assumed that these conditions exist within the cask cavity. The containment must limit the leakage of this water vapor to that prescribed in ANSI N14.5. It is very conservative to assume that the concentration of nuclides in the free liquid is equal to that of the solids which comprise the vast majority of material being transported in the cask. This value is determined below:

$$C = \frac{\text{Total Curie Content of Vapor}}{\text{Minimum Void Volume in Cask Cavity}}$$

- Cask curie content = 3000 x A₂ or less
- Free water is limited to restriction of one-percent of solid volume
- Hence the curie content = 0.01 x 3000 A₂
- The minimum void volume occurs when the largest liner is shipped

$$\text{(Equation 2)} \quad V (\text{cask cavity}) = \frac{\pi}{4} \times 67.25^2 \times 75.75 = 269,064 \text{ in}^3$$

The largest liner will have at least ¾ inch of radial clearance and a 1½ inch of height difference, giving a volume,

$$\begin{aligned} \text{(Equation 3)} \quad V (\text{liner}) &= \frac{\pi}{4} \times (67.25 - 2 \times 0.75)^2 \times (75.75 - 1.5) \text{ in}^3 \\ &= 252,103 \text{ in}^3 \end{aligned}$$

$$\begin{aligned} \text{Void Volume} &= 269,064 - 252,103 = 16,961 \text{ in}^3 \\ &= 16,961 \text{ in}^3 \times 16.4 \text{ cm}^3/\text{in}^3 \\ &= 278,161 \text{ cm}^3 \end{aligned}$$

Hence,

$$\text{(Equation 4)} \quad C = \frac{30 A_2 \text{ Ci}}{278,161 \text{ cm}^3} = 1.08 \times 10^{-4} A_2 \text{ Ci/cm}^3$$

And,

$$\begin{aligned} \text{(Equation 5)} \quad L_n &= \frac{R_n}{C} = \frac{2.78 \times 10^{-10} A_2 \text{ Ci/sec}}{1.08 \times 10^{-4} A_2 \text{ Ci/cm}^3} && \text{Eqn. 3, Ref. 4} \\ &= 2.57 \times 10^{-6} \text{ cm}^3/\text{sec} \end{aligned}$$

A leak rate at standard conditions will be calculated which is equivalent to a volumetric leak rate of $2.57 \times 10^{-6} \text{ cm}^3/\text{sec}$.

Equations B.3, B.4, and B.5 are used to determine the diameter of hole that would give a leak rate of $2.57 \times 10^{-6} \text{ cm}^3/\text{sec}$.

$$L_u = (F_c + F_m)(P_u - P_d) \left(\frac{P_a}{P_u} \right) \quad \text{Eqn. B.5, Reference 4}$$

$$F_m = \frac{3.81 \times 10^3 D^3 \sqrt{\frac{T}{M}}}{a \text{ Pa}} \quad \text{Eqn. B.4, Reference 4}$$

$$F_c = \frac{2.49 \times 10^6 D^4}{a \mu} \quad \text{Eqn. B.3, Reference 4}$$

where:

L_u = upstream leakage rate, cm^3/sec

$$\mu_{\text{air}} = 0.0185 \text{ cP}$$

$$T = 168^\circ\text{F} = 349^\circ\text{K} \quad \text{Section 3.4.4}$$

$$P_u = 8.4 \text{ psig} = 1.57 \text{ atm}$$

$$P_d = 1.0 \text{ atm}$$

$$P_a = (1.57 + 1.0)/2 = 1.28 \text{ atm}$$

$$M_{\text{water}} = 18 \text{ g/gmole}$$

a = length of hole; assume 0.6 cm

Substituting into Eqns. B.3, B.4, and B.5:

$$F_c = \frac{2.49 \times 10^6 D^4}{(0.6)(0.0185)} = 2.24 \times 10^8 D^4$$

$$F_m = \frac{3.81 \times 10^3 D^3 \sqrt{\frac{349}{18}}}{(0.6)(1.28)} = 2.18 \times 10^4 D^3$$

$$2.57 \times 10^{-6} = (2.24 \times 10^8 D^4 + 2.18 \times 10^4 D^3)(1.57 - 1.0) \left(\frac{1.28}{1.57} \right) \quad \text{Solve for } D$$

$$D = 3.74 \times 10^{-4} \text{ cm}$$

Next, using Equation B.5 from Reference 4, determine the flow of air at standard conditions through a hole of this size. Where:

$$a = 0.6 \text{ cm}$$

$$M_{\text{air}} = 29 \text{ g/gmole}$$

$$\mu_{\text{air}} = 0.0185 \text{ cP}$$

$$P_u = 1.0 \text{ atm}$$

$$P_d = 0.01 \text{ atm}$$

$$P_a = (1.0 + 0.01)/2 = 0.505 \text{ atm}$$

$$T = 298^\circ\text{K}$$

$$F_c = \frac{(2.49 \times 10^6)(3.74 \times 10^{-4})^4}{(0.6)(0.0185)} = 4.38 \times 10^{-6} \frac{\text{cm}^3}{\text{atm} - \text{sec}}$$

$$F_m = \frac{(3.81 \times 10^3)(3.74 \times 10^{-4})^3 \sqrt{\frac{298}{29}}}{(0.60)(0.505)} = 2.11 \times 10^{-6} = \frac{\text{cm}^3}{\text{atm} - \text{sec}}$$

Substituting into B.5:

$$L_{\text{std}} = (4.38 \times 10^{-6} + 2.11 \times 10^{-6})(1.0 - 0.01) \left(\frac{0.505}{1.0} \right) = 3.25 \times 10^{-6} \frac{\text{atm} - \text{cm}^3}{\text{sec}}$$

4.2.2 Pressurization of the Containment Vessel

Section 2.4.4 summarizes normal condition temperatures and pressures within the containment vessel. These pressures and associated temperatures are used to evaluate the integrity of the CNS 10-160B package. None of these conditions reduce the effectiveness of the package containment.

4.2.3 Coolant Containment

Not applicable; there are no coolants in the CNS 10-160B package.

4.2.4 Coolant Loss

Not applicable; there are no coolants in the CNS 10-160B package.

4.3 Containment Requirements for Hypothetical Accident Conditions

4.3.1 Leak Test Requirements

Section 2.7 demonstrates that the CNS 10-160B cask will maintain its containment capability throughout the hypothetical accident conditions. Fission gas products will not be carried within the cask so there can be no release of fission gases. The CNS 10-160B cask is designed, fabricated, and leak tested to preclude a release of radioactive material in excess of the limits prescribed in NRC Regulatory Guide 7.4, paragraph C and 10CFR71.51(a)(2). The limits on leakage during normal conditions of transport are defined by 10CFR71.51(a)(2).

The leak test procedure which assures compliance with leakage during normal conditions of transport will also be sufficient to assure compliance during hypothetical accident conditions. A description follows of the calculational procedure which demonstrates that the maximum leakage requirement during normal conditions of transport is more stringent than the maximum leakage requirement during the hypothetical accident.

10CFR71.51(a)(2) states the containment requirements for the hypothetical accident conditions as:

...no escape of krypton-85 exceeding 10,000 curies in one week, no escape of other radioactive material exceeding a total amount of A_2 in one week, and no external radiation dose rate exceeding one rem per hour at one meter from the external surface of the package.

Since the cask does not carry fission products or radioactive gases, only the A_2 per week requirement is limiting. A release of A_2 in one week is equivalent to the activity release rate, R_a , given by equation 9.

$$\begin{aligned} \text{(Equation 9)} \quad R_a &= (A_2 / \text{week})(1 \text{ week} / 168 \text{ hr}) \\ &= 5.952 \times 10^{-3} A_2 / \text{hr} \end{aligned}$$

In Section 3.5.4, it is noted that the saturated water vapor in equilibrium at 243 degrees-F and 31.2 psig could exist within the internal shipping containers (liners or drains). It is assumed that these conditions exist within the cask cavity. The containment must limit the leakage of this water vapor to that prescribed in ANSI N14.5. It is very conservative to assume that the concentration of nuclides in the free liquid is equal to that of the solids which comprise the vast majority of material being transported in the cask. This value is determined below:

$$C = \frac{\text{Total Curie Content of Vapor}}{\text{Minimum Void Volume in Cask Cavity}}$$

- Cask curie content = $3000 \times A_2$ or less
- Free water is limited to restriction of one-percent of solid volume
- Hence the curie content = $0.01 \times 3000 A_2$
- The minimum void volume occurs when the largest liner is shipped

$$\text{(Equation 10)} \quad V(\text{cask cavity}) = \frac{\pi}{4} \times 67.25 \times 75.75 = 269,064$$

The largest liner will have at least $\frac{3}{4}$ inch of radial clearance and a $1\frac{1}{2}$ inch of height difference, giving a volume,

$$\begin{aligned} \text{(Equation 11)} \quad V(\text{liner}) &= \frac{\pi}{4} \times (67.25 - 2 \times 0.75)^2 \times (75.75 - 1.5) \text{ in}^3 \\ &= 252,103 \text{ in}^3 \end{aligned}$$

$$\begin{aligned} \text{Void Volume} &= 269,064 - 252,103 = 16,961 \\ &= 16,961 \text{ in}^3 \times 16.4 \text{ cm}^3/\text{in}^3 \\ &= 278,161 \text{ cm}^3 \end{aligned}$$

Hence,

$$\text{(Equation 12)} \quad C = \frac{30A_2 \text{ Ci}}{278,161 \text{ cm}^3} = 1.08 \times 10^{-5} A_2 \text{ Ci/cm}^3$$

The corresponding volumetric leak rate, L, is calculated by substituting C given by equation 12 and R_a given by equation 9 into equation 1. Equation 13 results from these substitutions.

$$\begin{aligned} \text{(Equation 13)} \quad L_a &= \frac{5.952 \times 10^{-3} A_2 \text{ Ci/hr}}{1.08 \times 10^{-5} A_2 \text{ Ci/cm}^3} \frac{1 \text{ hr}}{3600 \text{ sec}} \\ &= 1.53 \times 10^{-2} \text{ cm}^3/\text{sec} \end{aligned}$$

The allowable leak rate during the hypothetical accident is larger than during the normal conditions of transport, $3.25 \times 10^{-6} \text{ atm-cm}^3/\text{sec}$. Thus, the leak rate for normal conditions of transport is limiting and will determine the maximum permissible leak rate during tests.

4.4 Determination of Test Conditions for Preshipment Leak Test

4.4.1 Maximum Permissible Leak Rate at Standard Conditions

The preshipment leak test is performed by pressurizing the annulus between the O-ring seals of the primary and secondary lids (or if used, the vent or drain ports) with air. Pressure is read on a pressure gauge which is readable without estimation and which is calibrated to a maximum error of 1% full scale.

The test pressure shall be 35 PSIG and the test shall last for ½ hour (10 minutes for vent or drain ports) with an allowable pressure drop of 1 PSIG. Any condition which results in a pressure drop of more than 1 PSIG shall be corrected.

ANSI N14.5 – 1997 states (Reference 4, Table 1) that the permitted leak rate shall be either less than the reference air leakage rate, L_R , or no detected leakage when tested to a sensitivity of 1×10^{-3} ref-cm³/sec. The following sections demonstrate that the sensitivity of the assembly verification test is equal to 10^{-3} atm-cm³/sec is achieved with the preshipment leak test described above..

4.4.2 Detector Sensitivity – Test Conditions

The test performed is a pressure drop test. The annulus between the O-ring seals is pressurized with air. The annulus is a 1/8 inch deep groove, 1/8 inch in width, centered between O-rings, with a minimum inner diameter of 68 15/16 inches. The minimum volume of the annulus is 55 cm³. The leak rate at test conditions is determined from equation B.14 of ANSI N14.5-1997 which is given as equation 15. Note that the same test is used for both the primary and secondary lid annulus. The secondary lid annulus is on a minimum 35½ inch diameter with a 1/8 x 1/8 inch groove. Since its minimum volume is about 28 cm³ (which is less than the primary lid volume), the test sensitivity is greater for this test and is acceptable.

$$\text{(Equation 15)} \quad LR = \frac{V T_s}{3600 \text{ HPs}} \left[\frac{P_1}{T_1} - \frac{P_2}{T_2} \right] \quad \text{Eqn B.14, Reference 4}$$

where:

L_R = atm-cm³/sec of air at standard conditions

V = gas volume in the test annulus cm³

T_s = reference absolute temperature, 298°K

H = test duration, hours

P_1 = gas pressure in test item at start of test, atm, abs

P_2 = gas pressure in test item at end of test, atm, abs

P_s = standard pressure = 1 atm

T_1 = gas temperature in test item at start of test, °K

T_2 = gas temperature in test item at end of test, °K

4.4.3 Required Charge Pressure at the Test Pressure

Equation B.16 of Reference 4 states that:

$$S \leq L/2$$

Therefore the maximum permitted leak rate for the preshipment leak test is 2×10^{-3} atm-cm³/sec. Substituting this in Eqn. B-14, determine the required leak test pressure, where:

$$V = 55 \text{ cm}^3$$

$$H = 0.5 \text{ hr}$$

$$T_s = T_1 = T_2 = 298^\circ\text{K}$$

$$P_1 = 35 \text{ psig} = 3.38 \text{ atm}$$

$$2 \times 10^{-3} = \frac{(55 \text{ cm}^3)(298^\circ\text{K})}{3600(0.5 \text{ hr})(1 \text{ atm})} \left(\frac{3.38 \text{ atm}}{298^\circ\text{K}} - \frac{P_2}{298^\circ\text{K}} \right) \quad \text{Solve for } P_2:$$

$$P_2 = 3.31 \text{ atm} = 34 \text{ psig}$$

Therefore, the 1 psig pressure drop test starting at 35 psig meets the preshipment test requirement for a minimum sensitivity of 10^{-3} atm-cm³/sec.

4.5 Periodic Verification Leak Rate Determination Using R-12 Test Gas

This section contains calculations to determine the periodic verification test measurement that is equivalent to the maximum permissible leak rate as determined using ANSI N14.5-1997 (Reference 4).

The purpose of this calculation is to determine the allowable leak rate using the R-12 halogen gas that may be used to perform the annual verification leak tests on the CNS 10-160B cask.

4.5.1 Introduction

The text of this document is prepared using Mathcad, Version 6.0, software. Most conventions used in the text are the same as normal practice. A benefit of the Mathcad code is that it automatically carries all

units with the variables used in the calculations. The code also allows output of variables in any form of the fundamental units (length, mass, time, etc.), allowing for automatic conversions between unit systems without the need for conversion factors. All Mathcad calculations in this Section 4.5 have been verified by hand calculations.

This calculation uses formulas presented in ANSI N14.5 - 1997.

4.5.2 Detector Sensitivity Calculation – Test Conditions

This section determines the sensitivity necessary for a leak test performed with R-12 halogen gas. This test is performed using a General Electric Model H-25 leak detector, along with a Yokogawa Model LS-20 leak standard containing R-12 halogen gas. The leak standard is used to calibrate the leak detector to alarm at the maximum allowable test leak rate. The test is performed by filling the region between the O-rings with 25 psig of R-12 halogen gas.

$$L_{std} = 3.25 \cdot 10^{-6} \cdot std \cdot \frac{cm^3}{sec} \quad \text{Section 4.2.1 of 10-160B SAR}$$

Where, for air at standard conditions:

$$P_a = .505 \cdot atm$$

$$T = 298 \cdot K$$

$$P_u = 1.0 \cdot atm$$

$$M_{air} = 29 \cdot \frac{gm}{mole}$$

$$P_d = .01 \cdot atm$$

$$\mu_{air} = 0.0185 \cdot cP$$

Assume a, which is the length of the hole in the o-ring, is

$$a = 0.6 \cdot cm \quad \text{From 4.2.1}$$

The maximum possible diameter of hole in the O-ring is:

$$D_{max} = 3.74 \cdot 10^{-4} \cdot cm \quad \text{From Section 4.2.1}$$

$$L_{\text{std}}(D) = (F_c(D) + F_m(D) \cdot (P_u - P_d) \cdot \frac{P_a}{P_d}) \quad \text{Eqn. B5 - ANSI N14.5 - 1997}$$

Determine the equivalent air/R12 mixture (L_{mix}) that would leak from D_{max} during a leak test. Assume the O-ring void is pressurized to 25 psig (2.7 atm) with an air/R12 mixture.

$$P_{\text{mix}} = 2.7 \cdot \text{atm}$$

$$P_{\text{air}} = 1.0 \cdot \text{atm}$$

$$P_{\text{R12}} = 1.7 \cdot \text{atm}$$

$$P_a = \frac{P_{\text{mix}} + P_{\text{air}}}{2} \Rightarrow P_a = 1.85 \cdot \text{atm}$$

$$M_{\text{R12}} = 121 \cdot \frac{\text{gm}}{\text{mole}} \quad \text{ANSI N14.5 - 1997}$$

$$\mu_{\text{R12}} = 0.0124 \cdot \text{cP} \quad \text{ANSI N14.5 - 1997}$$

$$M_{\text{mix}} = \frac{M_{\text{R12}} P_{\text{R12}} + M_{\text{air}} P_{\text{air}}}{P_{\text{mix}}} \quad \text{Eqn. B7 ANSI N14.5 - 1997}$$

$$\Rightarrow M_{\text{mix}} = 86.93 \cdot \frac{\text{gm}}{\text{mole}}$$

$$\mu_{\text{mix}} = \frac{\mu_{\text{air}} P_{\text{air}} + \mu_{\text{R12}} P_{\text{R12}}}{P_{\text{mix}}} \quad \text{Eqn. B8 ANSI N14.5 - 1997}$$

$$\Rightarrow \mu_{\text{mix}} = 0.015 \cdot \text{cP}$$

Determine L_{mix} as a function of temperature. The viscosities of air and R12 do not change significantly over the range of temperatures evaluated:

$$T = 273 \cdot \text{K}, 278 \cdot \text{K}, 318 \cdot \text{K} \quad \text{Temperature range for test: } 32^\circ\text{F to } 113^\circ\text{F}$$

$$F_c = \frac{2.49 \cdot 10^6 \cdot D_{\text{max}}^4 \cdot \text{cP} \cdot \text{std}}{a \cdot \mu_{\text{mix}} \cdot \text{sec} \cdot \text{atm}} \Rightarrow F_c = 5.539 \cdot 10^{-6} \cdot \frac{\text{cm}^3}{\text{sec} \cdot \text{atm}}$$

$$F_m(T) := \frac{3.81 \cdot 10^3 \cdot D_{ma}^3 \cdot \sqrt{\frac{T}{M_{mi}}} \cdot \text{cm gm}^{0.5}}{a \cdot P_a \cdot K^{0.5} \cdot \text{mole}^{0.5} \cdot \text{sec}}$$

$$L_{mix}(T) = (F_c + F_m(T)) \cdot (P_{mix} - P_{air}) \cdot \frac{P_a}{P_{mix}}$$

$$T_F(T) := \left[(T \cdot F - 273 \cdot K) \cdot \frac{9}{5 \cdot K} + 32 \right]$$

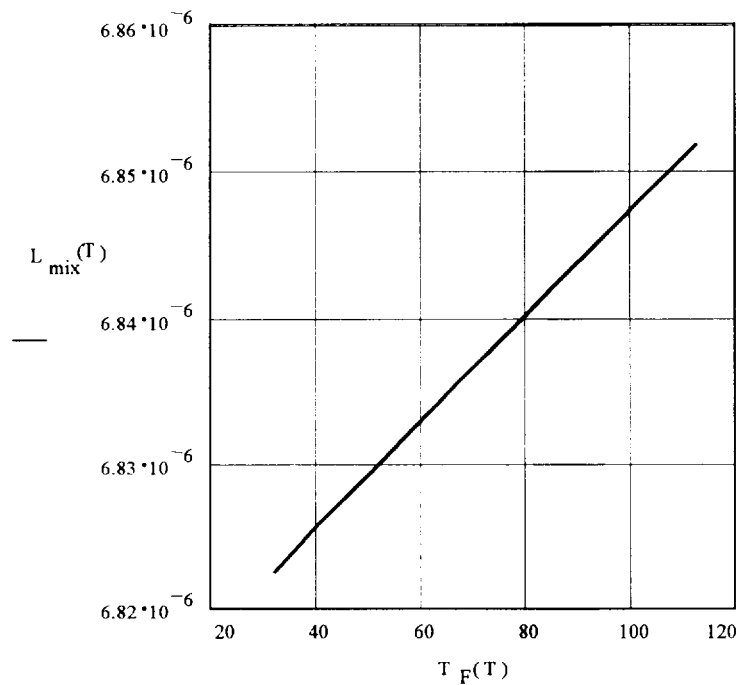


Fig 4.1 - Allowable R-12 Gas/Air Mixture Test Leakage, cm³/sec, versus test temperature, deg.F

The R-12 component of this leak rate can be determined by multiplying the leak rate of the mixture by the ratio of the R-12 partial pressure to the total pressure of the mix, as follows.

$$L_{R12}(T) = L_{mix}(T) \cdot \frac{P_{R12}}{P_{mix}}$$

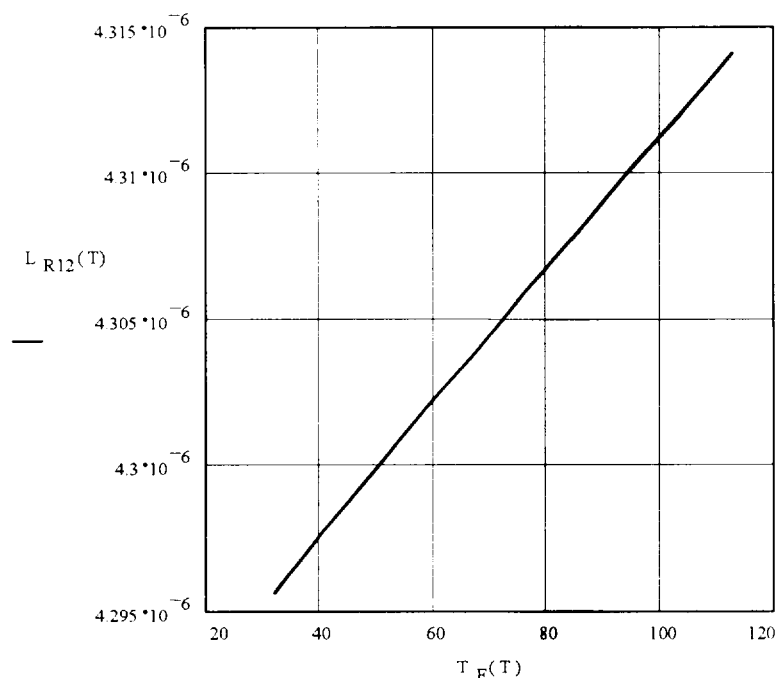


Fig.4.2 - Allowable R-12 test leakage, cm^3/sec versus test temperature, deg.F

Determine the equivalent mass flow rate for L_{R12} in oz/yr:

$$N(T) = \frac{P_{R12}V}{R_0 \cdot T} \quad \text{Ideal Gas Law}$$

where,

$$R_0 = \frac{82.05 \cdot \text{cm}^3 \cdot \text{atm}}{\text{moleK}}$$

This data can then be used to convert the volumetric leak rate for R-12 calculated above to a mass leak rate. By dividing N by V, the number of moles per unit volume can be multiplied by the molecular weight of the gas and the maximum allowable volumetric leak rate to determine the maximum allowable mass leak rate, as a function of test temperature as shown in the graph below. The conversion from grams per second to ounces per year is also shown below.

$$L(T) = L_{R12}(T) \cdot \frac{N(T)}{V} \cdot M_{R12} \cdot \frac{\text{yr}}{\text{oz}}$$

$$\frac{\text{gm}}{\text{sec}} = 1.113 \cdot 10^6 \cdot \frac{\text{oz}}{\text{yr}} \quad \text{Conversion of gm/sec to oz/yr}$$

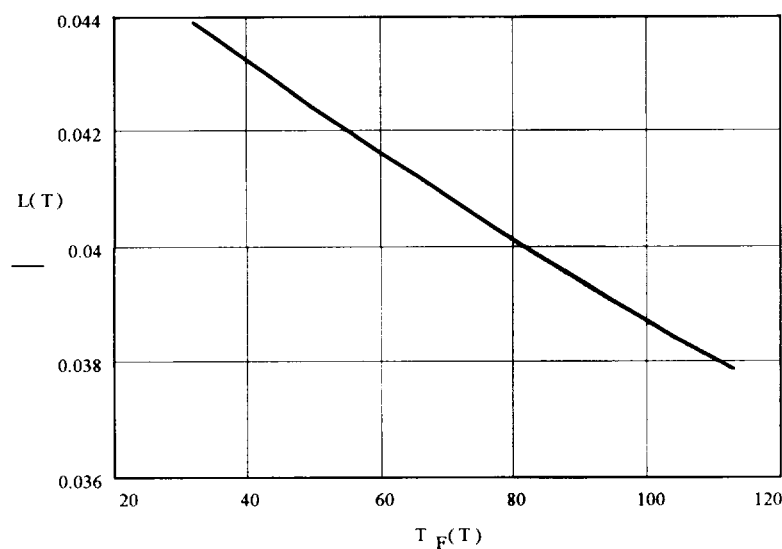


Fig.4.3 - Allowable R-12 test leakage, oz/yr, versus test temperature, deg.F

The graph above can be used to determine the allowable leak rate based on the temperature at the time of the test. According to ANSI N14.5 methodology, the maximum allowable leak rate must be divided by 2 to determine the minimum sensitivity for the test. A graph of the required sensitivity in oz/yr is presented below:

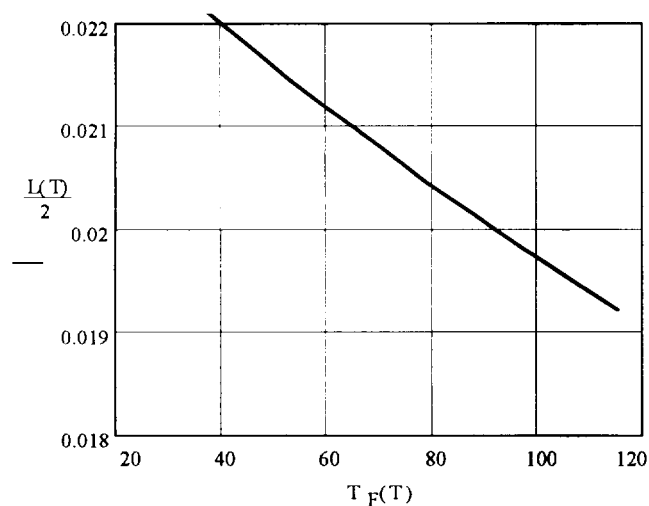


Fig.4.4 - Allowable R-12 test leakage sensitivity, oz/yr, versus test temperature, deg.F

The values presented in Figure 4.4 should be used to determine the sensitivity to calibrate the leak detec-

tor prior to the test.

4.6 Periodic Verification Leak Rate Determination Using Helium Test Gas

This section contains calculations to determine the periodic verification test measurement that is equivalent to the maximum permissible leak rate as determined using ANSI N14.5-1997 (Reference 4).

4.6.1 Introduction

The purpose of this calculation is to determine the allowable leak rate using the Helium gas that may be used to perform the annual verification leak tests on the CNS 10-160B cask.

The text of this document is prepared using Mathcad, Version 6.0, software. Most conventions used in the text are the same as normal practice. A benefit of the Mathcad code is that it automatically carries all units with the variables used in the calculations. The code also allows output of variables in any form of the fundamental units (length, mass, time, etc.), allowing for automatic conversions between unit systems without the need for conversion factors. All Mathcad calculations in this Section 4.6 have been verified by hand calculations.

4.6.2 Detector Sensitivity – Test Conditions

In Section 4.2.1, it was determined that the maximum possible diameter hole in the cask O-ring (D_{\max}) that would permit the standard leak rate ($L_{\text{std}} = 3.25 \times 10^{-6}$ std cm³/sec) is:

$$D_{\max} = 3.74 \cdot 10^{-4} \cdot \text{cm}$$

Next, determine the equivalent air/He mixture (L_{mix}) that would leak from D_{\max} during a leak test. Assume the O-ring void is pressurized to 25 psig (2.7 atm) with an air/He mixture.

$$P_{\text{mix}} = 2.7 \cdot \text{atm}$$

$$P_{\text{air}} = 1.0 \cdot \text{atm}$$

$$P_{\text{He}} = 1.7 \cdot \text{atm}$$

$$P_a = \frac{P_{\text{mix}} + P_{\text{air}}}{2}$$

$$P_a = 1.85 \cdot \text{atm}$$

$$M_{\text{He}} = 4.0 \cdot \frac{\text{gm}}{\text{mole}} \quad \text{ANSI N14.5 - 1997}$$

$$\mu_{\text{He}} := 0.0198 \cdot \text{cP} \quad \text{ANSI N14.5 - 1997}$$

$$M_{\text{mix}} := \frac{M_{\text{He}} P_{\text{He}} + M_{\text{air}} P_{\text{air}}}{P_{\text{mix}}} \quad \text{Eqn. B7 - ANSI N14.5}$$

$$\Rightarrow M_{\text{mix}} = 13.26 \cdot \frac{\text{gm}}{\text{mole}}$$

$$\mu_{\text{mix}} = \frac{\mu_{\text{air}} P_{\text{air}} + \mu_{\text{He}} P_{\text{He}}}{P_{\text{mix}}} \quad \text{Eqn. B8 - ANSI N14.5}$$

$$\Rightarrow \mu_{\text{mix}} = 0.019 \cdot \text{cP}$$

Determine L_{mix} as a function of temperature. Assume the viscosities of air and Helium do not change significantly over the range of temperatures evaluated:

$$= 273 \cdot \text{K}, 278 \cdot \text{K}, 318 \cdot \text{K} \quad \text{Temperature range for test: } 32^\circ\text{F to approx. } 113^\circ\text{F}$$

$$F_c = \frac{2.49 \cdot 10^6 \cdot D_{\text{max}}^4 \cdot \text{cP} \cdot \text{std}}{a \cdot \mu_{\text{mix}} \cdot \text{sec} \cdot \text{atm}}$$

$$\Rightarrow F_c = 4.203 \cdot 10^{-6} \cdot \frac{\text{cm}^3}{\text{sec} \cdot \text{atm}}$$

$$F_m(T) := \frac{3.81 \cdot 10^3 \cdot D_{\text{max}}^3 \cdot \sqrt{\frac{T}{M_{\text{mix}}}} \cdot \text{cm} \cdot \text{gm}^{0.5}}{a \cdot P_a \cdot \text{K}^{0.5} \cdot \text{mole}^{0.5} \cdot \text{sec}}$$

$$L_{\text{mix}}(T) := (F_c + F_m(T)) \cdot (P_{\text{mix}} - P_{\text{air}}) \cdot \frac{P_a}{P_{\text{mi}}}$$

$$T_F(T) = \left[(T \cdot F - 273 \cdot \text{K}) \cdot \frac{9}{5 \cdot \text{K}} + 32 \right]$$

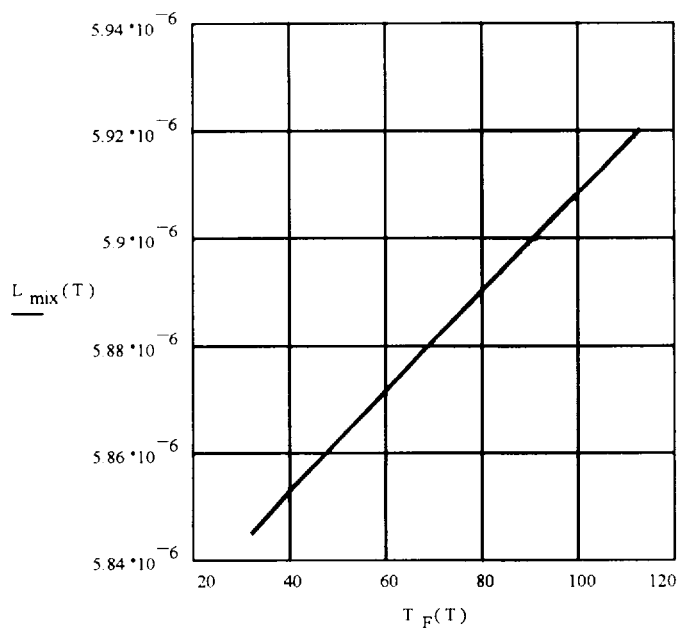


Fig. 4.5 - Allowable He/Air Mixture Test Leakage, cm³/sec, versus test temperature, deg.F

The Helium component of this leak rate can be determined by multiplying the leak rate of the mixture by the ratio of the Helium partial pressure to the total pressure of the mix, as follows.

$$L_{He}(T) = L_{mi}(T) \cdot \frac{P_{He}}{P_{mi}}$$

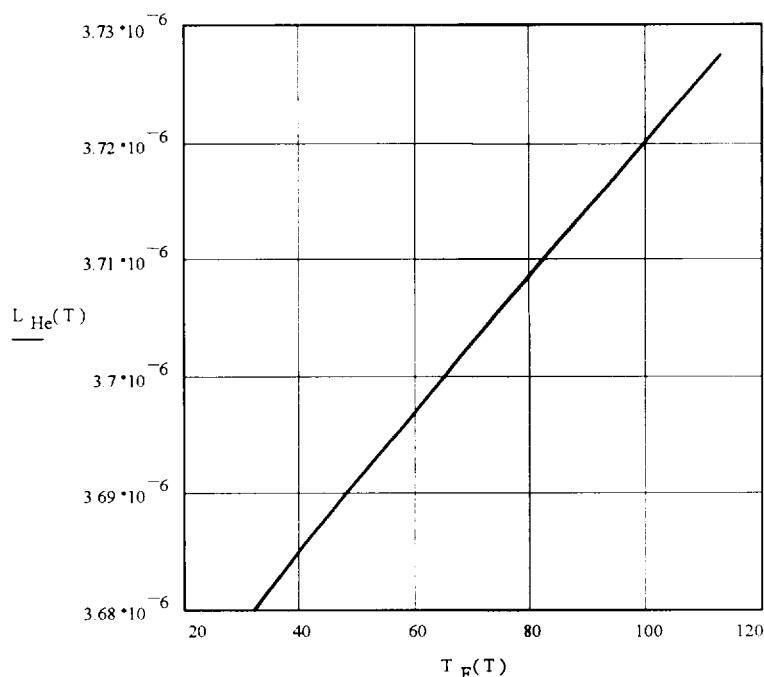


Fig. 4.6 - Allowable Helium test leakage, cm³/sec versus test temperature, deg. F

Determine the equivalent mass flow rate for L_{He} in oz/yr:

$$N(T) = \frac{P_{He} V}{R_o \cdot T} \quad \text{Ideal Gas Law}$$

where,

$$R_o = \frac{82.05 \text{ cm}^3 \cdot \text{atm}}{\text{moleK}}$$

This data can then be used to convert the volumetric leak rate for Helium calculated above to a mass leak rate. By dividing N by V , the number of moles per unit volume can be multiplied by the molecular weight of the gas and the maximum allowable volumetric leak rate to determine the maximum allowable mass leak rate, as a function of test temperature as shown in the graph below. The conversion from grams per second to ounces per year is also shown below.

$$L(T) = L_{He}(T) \cdot \frac{N(T)}{V} \cdot M_{He} \cdot \frac{\text{yr}}{\text{oz}}$$

$$\frac{\text{gm}}{\text{sec}} = 1.113 \cdot 10^6 \cdot \frac{\cdot \text{oz}}{\text{yr}} \quad \text{Conversion of gm/sec to oz/yr}$$

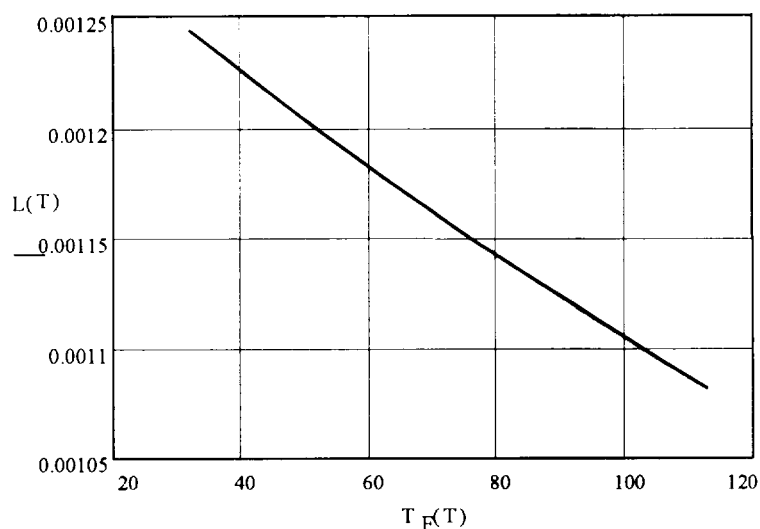


Fig.4.7 - Allowable helium test leakage, oz/yr, versus test temperature, deg.F

The graph above can be used to determine the allowable leak rate based on the temperature at the time of the test. According to ANSI N14.5 methodology, the maximum allowable leak rate must be divided by 2 to determine the minimum sensitivity for the test. A graph of the required sensitivity in oz/yr is presented below:

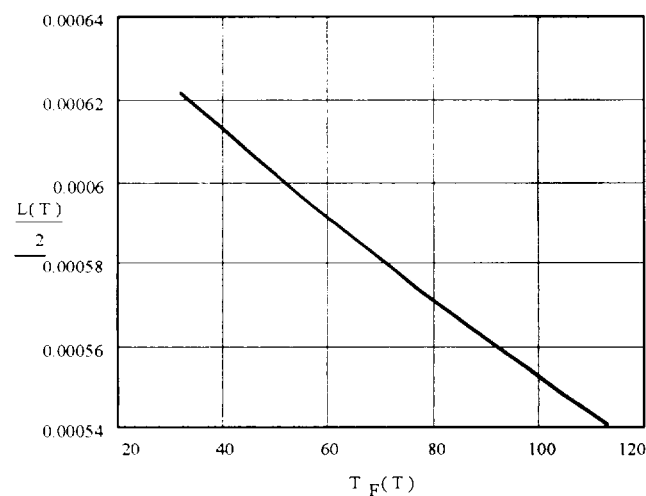


Fig.4.8 - Allowable helium test leakage sensitivity, oz/yr, versus test temperature, deg.F

The values presented in Figure 4.8 should be used to determine the sensitivity to calibrate the leak detector prior to the test.

4.7 Periodic Verification Leak Rate Determination Using R-134A Test Gas

This section contains calculations to determine the periodic verification test measurement that is equivalent to the maximum permissible leak rate as determined using ANSI N14.5-1997 (Reference 8).

4.7.1 Introduction

The purpose of this calculation is to determine the allowable leak rate using the R-134a halogen gas that will be used as an alternative to perform the annual verification leak tests on the CNS 10-160B cask. This halogen gas is now in widespread use as a replacement gas for R-12 in many industrial applications. Properties for R134a are included in Appendix 4.1.

The text of this document is prepared using Mathcad, Version 6.0, software. Most conventions used in the text are the same as normal practice. A benefit of the Mathcad code is that it automatically carries all units with the variables used in the calculations. The code also allows output of variables in any form of the fundamental units (length, mass, time, etc.), allowing for automatic conversions between unit systems without the need for conversion factors. All Mathcad calculations in this Section 4.7 have been verified by hand calculations.

4.7.2 Detector Sensitivity Calculation - Test Conditions

This section determines the sensitivity necessary for a leak test performed with R-134a halogen gas. This test is performed using a General Electric Model H-25 leak detector, along with a Yokogawa Model LS-20 leak standard containing R-134a halogen gas. The leak standard is used to calibrate the leak detector to alarm at the maximum allowable test leak rate. The test is performed by filling the region between the o-rings with 25 psig of R-134a halogen gas. In section 4.2.1, it was determined that the maximum possible diameter hole in the cask O-ring (D_{\max}) that would permit the standard leak rate ($L_{\text{std}} = 3.25 \times 10^{-6}$) is:

$$D_{\max} = 3.74 \cdot 10^{-4} \cdot \text{cm}$$

Next, determine the equivalent air/R134a mixture (L_{mix}) that would leak from D_{\max} during a leak test. Assume the O-ring void is pressurized to 25 psig (2.7 atm) with an air/R134a mixture.

$$P_{\text{mix}} = 2.7 \cdot \text{atm}$$

$$P_{\text{air}} = 1.0 \cdot \text{atm}$$

$$P_{\text{R134a}} = 1.7 \cdot \text{atm}$$

$$P_a = \frac{P_{\text{mix}} + P_{\text{air}}}{2}$$

$$P_a = 1.85 \cdot \text{atm}$$

The properties of R134a are given in the attached literature (Appendix 4.1):

$$M_{\text{R134a}} = 102 \cdot \frac{\text{gm}}{\text{mole}}$$

$$\mu_{\text{R134a}} = 0.012 \cdot \text{cP}$$

$$M_{\text{mix}} = \frac{M_{\text{R134a}} P_{\text{R134a}} + M_{\text{air}} P_{\text{air}}}{P_{\text{mix}}} \quad \text{Eqn. B7 - ANSI N14.5}$$

$$\Rightarrow M_{\text{mix}} = 74.96 \cdot \frac{\text{gm}}{\text{mole}}$$

$$\mu_{\text{mix}} = \frac{\mu_{\text{air}} P_{\text{air}} + \mu_{\text{R134a}} P_{\text{R134a}}}{P_{\text{mix}}} \quad \text{Eqn. B8 - ANSI N14.5}$$

$$\Rightarrow \mu_{\text{mix}} = 0.014 \text{cP}$$

Next, determine L_{mix} as a function of temperature. Assume the viscosities of air and R134a do not change significantly over the range of temperatures evaluated:

$$T = 273 \cdot \text{K}, 278 \cdot \text{K}, 318 \cdot \text{K} \quad \text{Temperature range for test: } 32^\circ\text{F to } 113^\circ\text{F}$$

Substitute these properties for the air/R134a mixture and the maximum diameter hole (D_{max}) into equations B.3, B.4, and B.5 from ANSI N14.5:

$$F_c = \frac{2.49 \cdot 10^6 \cdot D_{\text{max}}^4 \cdot \text{cP} \cdot \text{std}}{a \cdot \mu_{\text{mix}} \cdot \text{sec} \cdot \text{atm}}$$

$$\Rightarrow F_c = 5.636 \cdot 10^{-6} \cdot \frac{\text{cm}^3}{\text{sec} \cdot \text{atm}}$$

$$F_m(T) = \frac{3.81 \cdot 10^3 \cdot D_{ma}^3 \cdot \sqrt{\frac{T}{M_{mi}}} \cdot \text{cmgm}^{0.5}}{a \cdot P_a \cdot K^{0.5} \cdot \text{mole}^{0.5} \cdot \text{sec}}$$

$$L_{\text{mix}}(T) = (F_c + F_m(T)) \cdot (P_{\text{mix}} - P_{\text{air}}) \cdot \frac{P_a}{P_{\text{mi}}}$$

$$T_F(T) := \left[(T_F - 273 \cdot K) \cdot \frac{9}{5 \cdot K} + 32 \right]$$

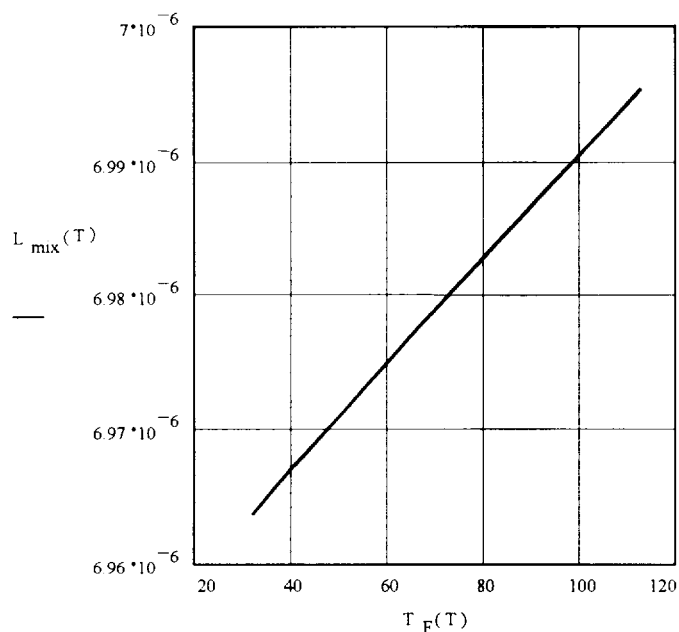


Fig.4.9 - Allowable R134a/Air Mixture Test Leakage, m³/sec, versus test temperature, deg.F

The R-134a component of this leak rate can be determined by multiplying the leak rate of the mixture by the ratio of the R-134a partial pressure to the total pressure of the mix, as follows.

$$L_{R134a}(T) = L_{\text{mix}}(T) \cdot \frac{P_{R134a}}{P_{\text{mix}}}$$

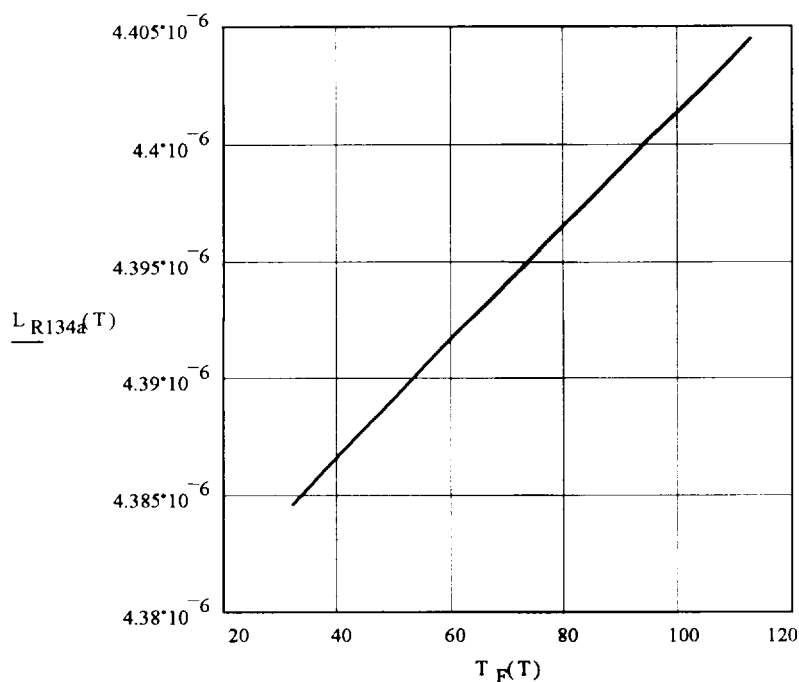


Fig. 4.10 - Allowable R-134a test leakage, cm^3/sec versus test temperature, deg. F

Determine the equivalent mass flow rate for L_{R134a} in oz/yr, the measurement used by the detector:

$$N(T) = \frac{P_{R134a} V}{R_O \cdot T} \quad \text{Ideal Gas Law}$$

where,

$$R_O = \frac{82.05 \text{ cm}^3 \cdot \text{atm}}{\text{mole} \cdot \text{K}} \quad \text{Universal gas constant}$$

This data can then be used to convert the volumetric leak rate for R-134a calculated above to a mass leak rate. By dividing N by V, the number of moles per unit volume can be multiplied by the molecular weight of the gas and the maximum allowable volumetric leak rate to determine the maximum allowable mass leak rate, as a function of test temperature as shown in the graph below. The conversion from grams per second to ounces per year is also shown below.

$$L(T) = L_{R134a}(T) \cdot \frac{N(T)}{V} \cdot M_{R134a} \cdot \frac{\text{yr}}{\text{oz}}$$

$$\frac{\text{gm}}{\text{sec}} = 1.113 \cdot 10^6 \cdot \frac{\text{oz}}{\text{yr}} \quad \text{Conversion of gm/sec to oz/yr}$$

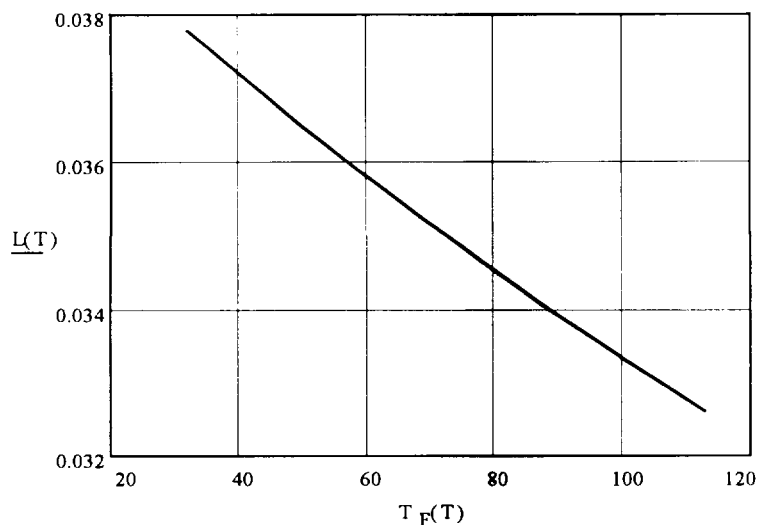


Fig.4.11 - Allowable R134a test leakage, oz/yr, versus test temperature, deg.F

The graph above can be used to determine the allowable leak rate based on the temperature at the time of the test. According to ANSI N14.5 methodology, the maximum allowable leak rate must be divided by 2 to determine the minimum sensitivity for the test. A graph of the required sensitivity in oz/yr is presented below:

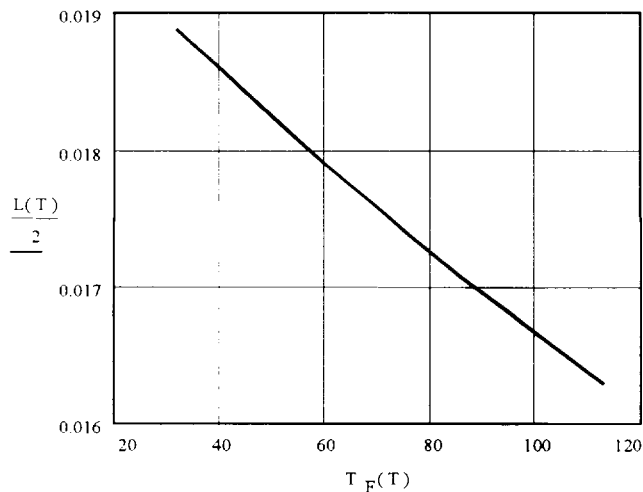


Fig.4.12 - Allowable R134a test leakage sensitivity, oz/yr, versus test temperature, deg.F

The values presented in Figure 4.12 should be used to determine the sensitivity to calibrate the leak detector prior to the test.

4.8 Combustible Gas Generation Safety Assurance

Assurance of safe shipment of vessels which may generate combustible gas is based on meeting the following criteria over the shipment period.

- i) The quantity of hydrogen generated must be limited to a molar quantity that would be no more than 5% by volume at STP (or equivalent limits for other inflammable gases) of the secondary container gas void (i.e., no more than 0.063 gram moles/cubic foot, or
- ii) The secondary container and the cask cavity (if required) must be inerted with a diluent to assure the oxygen, including that radiolytically generated, shall be limited to 5% by volume in those portions of the package which could have hydrogen greater than 5%.

Criterion (i) essentially stipulates that the quantity of hydrogen shall be limited to 5% of the secondary container gas void at STP. This 5% hydrogen gas volume at standard conditions is equivalent to a hydrogen partial pressure of 0.735 psi or 0.063 gram moles/cubic foot. By actual experiment (Ref. 6), the produce an approximate 2.3 psi incremental pressure increase above a nominally atmospheric initial pressure. This is because 0.063 gram moles of hydrogen per cubic foot provides such a small source that the peak pressure rise resulting from ignition of this source is slight. (The pressure rise is independent of the total volume under test, i.e. the 0.063 gram moles per cubic foot relationship to a 2.3 psi pressure rise is valid for one or many cubic feet of specimen volume). This incremental pressure rise is an inconsequential load on the cask structure.

(Ref. 7), Criteria (ii) is invoked to ensure that when a secondary container's hydrogen concentration potentially exceeds 5% volume, release of that hydrogen to the then existing total volume (secondary container void plus cask void) will not result in a total mixture of greater than 5% volume hydrogen in a greater than 5% oxygen atmosphere. Maintaining the oxygen concentration lower than five (5) volume % assures a nonflammable mixture.

4.9 References

1. Hansen Couplings, The Hansen Manufacturing Company, Cleveland, Ohio.
2. Mark's Standard Handbook for Mechanical Engineers, Theodore Baumeister, et. al., Eighth Edition, McGraw-Hill Book Company, New York, 1979.
3. Basic Engineering Thermodynamics, M. W. Zemansky and H. C. Van Ness, McGraw-Hill Book Company, New York, 1966.
4. American National Standard for Leakage Tests on Packages for Shipment of Radioactive Materials, American National Standards Institute, Inc., New York, ANSI N14.5-1997, 1998.
5. CRC Handbook of Chemistry and Physics, Robert C. Weast and Melvin J. Astle, eds., 62nd Edition, CRC Press, Inc., Boca Ration, Florida, 1981.
6. Flame and Detonation Initiation Area Propagation in Various Hydrogen - Air Mixtures With and Without Water Spray, L. W. Carlson, et. al., Atomic International Division of Rockwell International, Canoga Park, California, May 11, 1973.
7. Combustion, Flames and Explosions of Gases, B. Lewis and G. von Elbe, Academic Press, New York, 1961, Second Edition, Appendix B.

[THIS PAGE INTENTIONALLY LEFT BLANK]

ATTACHMENT 2

**Justification for Revision
3 pages**

ATTACHMENT 2

JUSTIFICATION FOR REVISION 16 TO THE CNS 10-160B SAR AND C OF C

The primary requested change is to increase the quantity limit to 3000 times a Type A quantity without a change in the currently authorized type of permitted content materials, material form, or other quantity limits. The currently authorized activity limit is "not to exceed 2000 times a Type A quantity".

No change is requested to the maximum quantity limits listed in 5(b)(2) of: decay heat \leq 100 watts and fissile material \leq the mass limits of 10 CFR 71.53. As the quantity limit is the basis for the containment leak rate calculations of Chapter 4, the leak rate calculations have been revised to reflect a limit of 3000 times a Type A quantity.

In addition, text changes have been made to Chapter 4 Containment, Section 4.1. Previously, the lid leak test ports were identified as penetrations of the containment boundary. However, since the ports are outside the inner o-ring (the inner o-ring was considered the containment boundary in all analyses), the ports do not penetrate the containment boundary. The text in Section 4.1.2 has been revised to correctly identify only two containment penetrations, the optional drain line and the optional vent port in the secondary lid. Also, in Section 4.1.4, the incorrect designator of "Stat-O-Seal" has been removed from the lid o-rings (the seals are not Stat-O-Seals but silicone o-rings) and the inner o-ring of each lid pair is identified as the containment boundary for clarity.

Evaluations of each section of the 10-160B SAR taking into consideration the requested change are presented below.

CNS 10-160B Safety Analysis Report

1.0 GENERAL INFORMATION

1.1 Introduction

The requested change has no impact on this section.

1.2 Package Description

1.2.1 Packaging

The requested change has no impact on this section.

1.2.2 Operational Features

The requested change has no impact on this section.

1.2.3 Contents of Packaging

1.2.3.1 Cask Contents

Items 1, 2, and 3 are revised to specify 3000 A_2 as the maximum allowed activity. Regulatory Guide 7.11 identifies the radioactivity limit for a Category II package as "Between 3,000 A_2 and 30 A_2 " for Normal Form material. The impact of this change on the leak rate is discussed in Section 4,

ATTACHMENT 2

Containment

1.2.3.2 Waste Forms

The requested change has no impact on this section.

1.3 Appendix – CNS 10-160B Shipping Cask Drawing

The requested change has no impact on this section.

2.0 STRUCTURAL EVALUATION

The requested change to the quantity of radioactive material in the contents does not alter the cask structure or content weights previously approved by the NRC for the 10-160B. The requested change has no impact on this section.

3.0 THERMAL EVALUATION

The requested change to the quantity of radioactive material in the contents does not alter the thermal limit previously approved for the 10-160B. The requested change has no impact on this section.

4.0 CONTAINMENT

4.1 Containment Boundary

The text now reflects the existence of only two containment boundary penetrations, the optional drain line and the optional vent in the secondary lid. The lid seals are now correctly identified as silicone o-rings without the additional qualifier of "Stat-O-Seal" and the inner o-ring is identified as the containment boundary.

4.2 Containment Requirements for Normal Conditions of Transport

The calculations in this section have been revised using a source term of 3000 A₂.

4.3 Containment Requirements for Hypothetical Accident Conditions

The calculations in this section have been revised using a source term of 3000 A₂.

4.4 Determination of Test Conditions for Assembly Verification Leak Test

The requested change has no impact on this section.

4.5 Periodic Verification Leak Rate Determination Using R-12 Test Gas

The calculations in this section have been revised for a L_{STD} based on a source term of 3000 A₂.

4.6 Periodic Verification Leak Rate Determination Using Helium Test Gas

The calculations in this section have been revised for a L_{STD} based on

ATTACHMENT 2

a source term of 3000 A₂.

4.7 Periodic Verification Leak Rate Determination Using R-134a Test Gas

The calculations in this section have been revised for a L_{STD} based on a source term of 3000 A₂.

4.8 Combustible Gas Generation Safety Assurance

The requested change has no impact on this section.

4.9 References

The requested change has no impact on this section.

5.0 SHIELDING EVALUATION

The shielding evaluation is based on a gamma source limited by external dose rate not by total activity. As shown in the evaluation, a typical gamma source (⁶⁰Co is used) is limited by the external dose rate on the cask. The maximum ⁶⁰Co source, based on external dose rate, is less than the currently authorized activity limit of 2000 times a Type A quantity. The requested change to 3000 times a Type A quantity has no impact on this section.

6.0 CRITICALITY EVALUATION

The requested change does not alter the fissile material limit previously authorized. The requested change has no impact on this section.

7.0 OPERATING PROCEDURES

The requested change has no impact on this section.

8.0 ACCEPTANCE TESTS AND MAINTENANCE

The requested change has no impact on this section.