



ENCLOSURE

SEQUOYAH NUCLEAR PLANT UNIT 1 CYCLE 13  
CORE OPERATING LIMITS REPORT  
REVISION 0

# COLR FOR SEQUOYAH UNIT 1 CYCLE 13

## CORE OPERATING LIMITS REPORT

REVISION 0

May 2003

Prepared:

Signed by Terry R. Moffett / May 5, 2003  
Nuclear Fuel Date

Reviewed:

Signed by Gary Bair / May 13, 2003  
Reactor Engineering Supervisor Date

Signed by Ed E. Freeman / May 14, 2003  
Operations Manager Date

Signed by Ed E. Freeman, PORC Meeting 6119 / May 15, 2003  
PORC Chairman Date

Revision   0  

Pages affected       

Reason for Revision \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

## COLR FOR SEQUOYAH UNIT 1 CYCLE 13

### 1.0 CORE OPERATING LIMITS REPORT

This Core Operating Limits Report (COLR) for Sequoyah Unit 1 Cycle 13 has been prepared in accordance with the requirements of Technical Specification (TS) 6.9.1.14.

The TSs affected by this report are listed below:

TABLE 2.2-1  $f_1$  ( $\Delta I$ ) trip reset function for OT $\Delta$ T Trip (QTNL, QTPL) and rates of trip setpoint decrease per percent  $\Delta I$  (QTNS, QTPS)

TABLE 2.2-1  $f_2$  ( $\Delta I$ ) trip reset function for OP $\Delta$ T Trip (QPNL, QPPL) and rates of trip setpoint decrease per percent  $\Delta I$  (QPNS, QPPS)

3/4.1.1.3 Moderator Temperature Coefficient (MTC)

3/4.1.3.5 Shutdown Rod Insertion Limit

3/4.1.3.6 Control Rod Insertion Limits

3/4.2.1 Axial Flux Difference (AFD)

3/4.2.2 Heat Flux Hot Channel Factor ( $F_Q$  (X,Y,Z))

3/4.2.3 Nuclear Enthalpy Rise Hot Channel Factor ( $F_{\Delta H}$  (X,Y))

### 2.0 OPERATING LIMITS

The cycle-specific parameter limits for the specifications listed in section 1.0 are presented in the following subsections. These limits have been developed using the NRC approved methodologies specified in TS 6.9.1.14.

The following abbreviations are used in this section:

BOL stands for Beginning of Cycle Life  
ARO stands for All Rods Out  
HZP stands for Hot Zero THERMAL POWER  
EOL stands for End of Cycle Life  
RTP stands for RATED THERMAL POWER

#### 2.1 Moderator Temperature Coefficient - MTC (Specification 3/4.1.1.3)

2.1.1 The MTC limits are:

The BOL/ARO/HZP MTC shall be less positive than  $0 \Delta k/k/^\circ F$  (BOL limit). With the measured BOL/ARO/HZP MTC more positive than  $-0.10 \times 10^{-5} \Delta k/k/^\circ F$  (as-measured MTC limit), establish control rod withdrawal limits to ensure the MTC remains less positive than  $0 \Delta k/k/^\circ F$  for all times in core life.

The EOL/ARO/RTP MTC shall be less negative than or equal to  $-4.5 \times 10^{-4} \Delta k/k/^\circ F$ .

## COLR FOR SEQUOYAH UNIT 1 CYCLE 13

2.1.2 The 300 ppm surveillance limit is:

The measured 300 ppm/ARO/RTP MTC should be less negative than or equal to  $-3.75 \times 10^{-4} \Delta k/k/^{\circ}\text{F}$ .

2.2 Shutdown Rod Insertion Limit (Specification 3/4.1.3.5)

2.2.1 The shutdown rods shall be withdrawn to a position as defined below:

<u>Cycle Burnup (MWD/MTU)</u>	<u>Steps Withdrawn</u>
$\geq 0$	$\geq 225$ to $\leq 231$

2.3 Control Rod Insertion Limits (Specification 3/4.1.3.6)

2.3.1 The control rod banks shall be limited in physical insertion as shown in Figure 1.

2.4 Axial Flux Difference - AFD (Specification 3/4.2.1)

2.4.1 The axial flux difference (AFD) limits ( $\text{AFD}^{\text{Limit}}$ ) are provided in Figure 2.

2.5 Heat Flux Hot Channel Factor -  $F_Q(X,Y,Z)$  (Specification 3/4.2.2)

$F_Q(X,Y,Z)$  shall be limited by the following relationships:

$$F_Q(X,Y,Z) \leq \frac{F_Q^{\text{RTP}}}{P} * K(Z) \quad \text{for } P > 0.5$$

$$F_Q(X,Y,Z) \leq \frac{F_Q^{\text{RTP}}}{0.5} * K(Z) \quad \text{for } P \leq 0.5$$

$$\text{where } P = \frac{\text{THERMAL POWER}}{\text{RATED THERMAL POWER}}$$

2.5.1  $F_Q^{\text{RTP}} = 2.50$

2.5.2  $K(Z)$  is provided in Figure 3

## COLR FOR SEQUOYAH UNIT 1 CYCLE 13

The following parameters are required for core monitoring per the Surveillance Requirements of Specification 3/4.2.2:

2.5.3  $NSLOPE^{AFD} = 1.12$

where  $NSLOPE^{AFD}$  = Negative AFD limit adjustment required to compensate for each 1% that  $F_Q(X,Y,Z)$  exceeds BQDES.

2.5.4  $PSLOPE^{AFD} = 0.94$

where  $PSLOPE^{AFD}$  = Positive AFD limit adjustment required to compensate for each 1% that  $F_Q(X,Y,Z)$  exceeds BQDES.

2.5.5  $NSLOPE^{f_2(\Delta I)} = 1.40$

where  $NSLOPE^{f_2(\Delta I)}$  = Adjustment to negative OPΔT  $f_2(\Delta I)$  limit required to compensate for each 1% that  $F_Q(X,Y,Z)$  exceeds BCDES.

2.5.6  $PSLOPE^{f_2(\Delta I)} = 1.56$

where  $PSLOPE^{f_2(\Delta I)}$  = Adjustment to positive OPΔT  $f_2(\Delta I)$  limit required to compensate for each 1% that  $F_Q(X,Y,Z)$  exceeds BCDES.

2.5.7  $BQNOM(X,Y,Z) =$  Nominal design peaking factor, increased by an allowance for the expected deviation between the nominal design power distribution and the measurement.

2.5.8  $BQDES(X,Y,Z) =$  Maximum allowable design peaking factor which ensures that the  $F_Q(X,Y,Z)$  limit will be preserved for operation within the LCO limits, including allowances for calculational and measurement uncertainties.

2.5.9  $BCDES(X,Y,Z) =$  Maximum allowable design peaking factor which ensures that the centerline fuel melt limit will be preserved for operation within the LCO limits, including allowances for calculational and measurement uncertainties.

$BQNOM(X,Y,Z)$ ,  $BQDES(X,Y,Z)$ , and  $BCDES(X,Y,Z)$  data bases are provided for input to the plant power distribution analysis codes on a cycle specific basis and are determined using the methodology for core limit generation described in the references in Specification 6.9.1.14.

## COLR FOR SEQUOYAH UNIT 1 CYCLE 13

2.5.10 The increase in  $F_Q^M(X,Y,Z)$  for compliance with the 4.2.2.2.e Surveillance Requirements is defined as follows:

For cycle burnups $\leq 3668$ MWd/MTU	2.0%
For cycle burnups $> 3668$ MWd/MTU to $\leq 4831$ MWd/MTU	2.3%
For cycle burnups $> 4831$ MWd/MTU	2.0%

### 2.6 Nuclear Enthalpy Rise Hot Channel Factor - $F_{\Delta H}(X,Y)$ (Specification 3/4.2.3)

$F_{\Delta H}(X,Y)$  shall be limited by the following relationship:

$$F_{\Delta H}(X,Y) \leq \text{MAP}(X,Y,Z) / \text{AXIAL}(X,Y)$$

2.6.1  $\text{MAP}(X,Y,Z)$  is provided in Table 1.

$\text{AXIAL}(X,Y)$  is the axial peak from the normalized axial power shape.

The following parameters are required for core monitoring per the Surveillance Requirements of Specification 3/4.2.3:

$$F_{\Delta HR}^M(X,Y) \leq \text{BHNOM}(X,Y)$$

$$\text{where } F_{\Delta HR}^M(X,Y) = F_{\Delta H}(X,Y) / \text{MAP}^M / \text{AXIAL}(X,Y)$$

$F_{\Delta H}(X,Y)$  is the measured radial peak at location X,Y.

$\text{MAP}^M$  is the value of  $\text{MAP}(X,Y,Z)$  obtained from Table 1 for the measured peak.

2.6.2  $\text{BHNOM}(X,Y) =$  nominal design radial peaking factor, increased by an allowance for the expected deviation between the nominal design power distribution and the measurement.

2.6.3  $\text{BHDES}(X,Y) =$  maximum allowable design radial peaking factor which ensures that the  $F_{\Delta H}(X,Y)$  limit will be preserved for operation within the LCO limits, including allowances for calculational and measurement uncertainties.

2.6.4  $\text{BRDES}(X,Y) =$  maximum allowable design radial peaking factor which ensures that the steady state DNBR limit will be preserved for operation within the LCO limits, including allowances for calculational and measurement uncertainties.

$\text{BHNOM}(X,Y)$ ,  $\text{BHDES}(X,Y)$  and  $\text{BRDES}(X,Y)$  data bases are provided for input to the plant power distribution analysis computer codes on a cycle specific basis and are determined using the methodology for core limit generation described in the references in Specification 6.9.1.14.

## COLR FOR SEQUOYAH UNIT 1 CYCLE 13

2.6.5  $RRH = 3.34$  when  $0.8 < P \leq 1.0$

$RRH = 1.67$  when  $P \leq 0.8$

where  $RRH$  = Thermal power reduction required to compensate for each 1% that  $F_{\Delta H}(X,Y)$  exceeds its limit.

$P$  = Thermal Power / Rated Thermal Power

2.6.6  $TRH = 0.0334$  when  $0.8 < P \leq 1.0$

$TRH = 0.0167$  when  $P \leq 0.8$

where  $TRH$  = Reduction in  $OT\Delta T$   $K_1$  setpoint required to compensate for each 1%  $F_{\Delta H}(X,Y)$  exceeds its limit.

2.6.7 All cycle burnups shall use a 2% increase in  $F_{\Delta H}^M(X,Y)$  margin for compliance with the 4.2.3.2.d.1 Surveillance Requirement.

### 3.0 REACTOR CORE PROTECTIVE LIMITS

#### 3.1 Trip Reset Term [ $f_1(\Delta I)$ ] for Overtemperature Delta T-Trip (Specification 2.2.1)

The following parameters are required to specify the power level-dependent  $f_1(\Delta I)$  trip reset term limits for the Overtemperature Delta-T trip function:

3.1.1  $QTNL = -20\%$

where  $QTNL$  = the maximum negative  $\Delta I$  setpoint at rated thermal power at which the trip setpoint is not reduced by the axial power distribution.

3.1.2  $QTPL = +5\%$

where  $QTPL$  = the maximum positive  $\Delta I$  setpoint at rated thermal power at which the trip setpoint is not reduced by the axial power distribution.

3.1.3  $QTNS = 2.50\%$

where  $QTNS$  = the percent reduction in Overtemperature Delta-T trip setpoint for each percent that the magnitude of  $\Delta I$  exceeds its negative limit at rated thermal power ( $QTNL$ ).

3.1.4  $QTPS = 1.40\%$

where  $QTPS$  = the percent reduction in Overtemperature Delta-T trip setpoint for each percent that the magnitude of  $\Delta I$  exceeds its positive limit at rated thermal power ( $QTPL$ ).



## COLR FOR SEQUOYAH UNIT 1 CYCLE 13

### 3.2 Trip Reset Term [ $f_2(\Delta I)$ ] for Overpower Delta-T Trip (Specification 2.2.1)

The following parameters are required to specify the power level-dependent  $f_2(\Delta I)$  trip reset term limits for the Overpower Delta-T trip function:

#### 3.2.1 QPNL = -25%

where QPNL = the maximum negative  $\Delta I$  setpoint at rated thermal power at which the trip setpoint is not reduced by the axial power distribution.

#### 3.2.2 QPPL = +25%

where QPPL = the maximum positive  $\Delta I$  setpoint at rated thermal power at which the trip setpoint is not reduced by the axial power distribution.

#### 3.2.3 QPNS = 1.70%

where QPNS = the percent reduction in Overpower Delta-T trip setpoint for each percent that the magnitude of  $\Delta I$  exceeds its negative limit at rated thermal power (QPNL).

#### 3.2.4 QPPS = 1.70%

where QPPS = the percent reduction in Overpower Delta T trip setpoint for each percent that the magnitude of  $\Delta I$  exceeds its positive limit at rated thermal power (QPPL).


**COLR FOR SEQUOYAH UNIT 1 CYCLE 13**

**Table 1**

**Maximum Allowable Peaking Limits MAP(X,Y,Z)**

<b>AXIAL(X,Y)</b>	<b>ELEVATION (ft)</b>	<b>MAP(X,Y,Z)</b>	<b>AXIAL(X,Y)</b>	<b>ELEVATION (ft)</b>	<b>MAP(X,Y,Z)</b>
<b>1.1</b>	<b>2</b>	<b>1.9540</b>	<b>1.9</b>	<b>2</b>	<b>2.8169</b>
	<b>4</b>	<b>1.9494</b>		<b>4</b>	<b>3.1537</b>
	<b>6</b>	<b>1.9431</b>		<b>6</b>	<b>3.0026</b>
	<b>8</b>	<b>1.9337</b>		<b>8</b>	<b>2.8465</b>
	<b>10</b>	<b>1.9147</b>		<b>10</b>	<b>2.6987</b>
<b>1.2</b>	<b>2</b>	<b>2.1780</b>	<b>&gt;1.9</b>	<b>2</b>	<b>2.5377</b>
	<b>4</b>	<b>2.1682</b>		<b>4</b>	<b>2.8412</b>
	<b>6</b>	<b>2.1543</b>		<b>6</b>	<b>2.7051</b>
	<b>8</b>	<b>2.1317</b>		<b>8</b>	<b>2.5644</b>
	<b>10</b>	<b>2.0855</b>		<b>10</b>	<b>2.4313</b>
<b>1.3</b>	<b>2</b>	<b>2.4025</b>	<b>2.2</b>	<b>2</b>	<b>2.6873</b>
	<b>4</b>	<b>2.3875</b>		<b>4</b>	<b>3.3150</b>
	<b>6</b>	<b>2.3672</b>		<b>6</b>	<b>3.1660</b>
	<b>8</b>	<b>2.3029</b>		<b>8</b>	<b>3.0227</b>
	<b>10</b>	<b>2.1902</b>		<b>10</b>	<b>2.7136</b>
<b>1.4</b>	<b>2</b>	<b>2.6264</b>	<b>2.6</b>	<b>2</b>	<b>2.6965</b>
	<b>4</b>	<b>2.6047</b>		<b>4</b>	<b>3.5807</b>
	<b>6</b>	<b>2.5629</b>		<b>6</b>	<b>3.5514</b>
	<b>8</b>	<b>2.4204</b>		<b>8</b>	<b>3.3102</b>
	<b>10</b>	<b>2.2893</b>		<b>10</b>	<b>2.9726</b>
<b>1.5</b>	<b>2</b>	<b>2.8525</b>	<b>3.0</b>	<b>2</b>	<b>2.9517</b>
	<b>4</b>	<b>2.8119</b>		<b>4</b>	<b>3.8016</b>
	<b>6</b>	<b>2.6771</b>		<b>6</b>	<b>4.1225</b>
	<b>8</b>	<b>2.5251</b>		<b>8</b>	<b>3.6877</b>
	<b>10</b>	<b>2.3839</b>		<b>10</b>	<b>3.3466</b>
<b>1.7</b>	<b>2</b>	<b>2.7765</b>	<b>3.5</b>	<b>2</b>	<b>3.1500</b>
	<b>4</b>	<b>3.0191</b>		<b>4</b>	<b>4.1097</b>
	<b>6</b>	<b>2.8610</b>		<b>6</b>	<b>4.1197</b>
	<b>8</b>	<b>2.7036</b>		<b>8</b>	<b>3.7296</b>
	<b>10</b>	<b>2.5528</b>		<b>10</b>	<b>3.4811</b>

# COLR FOR SEQUOYAH UNIT 1 CYCLE 13

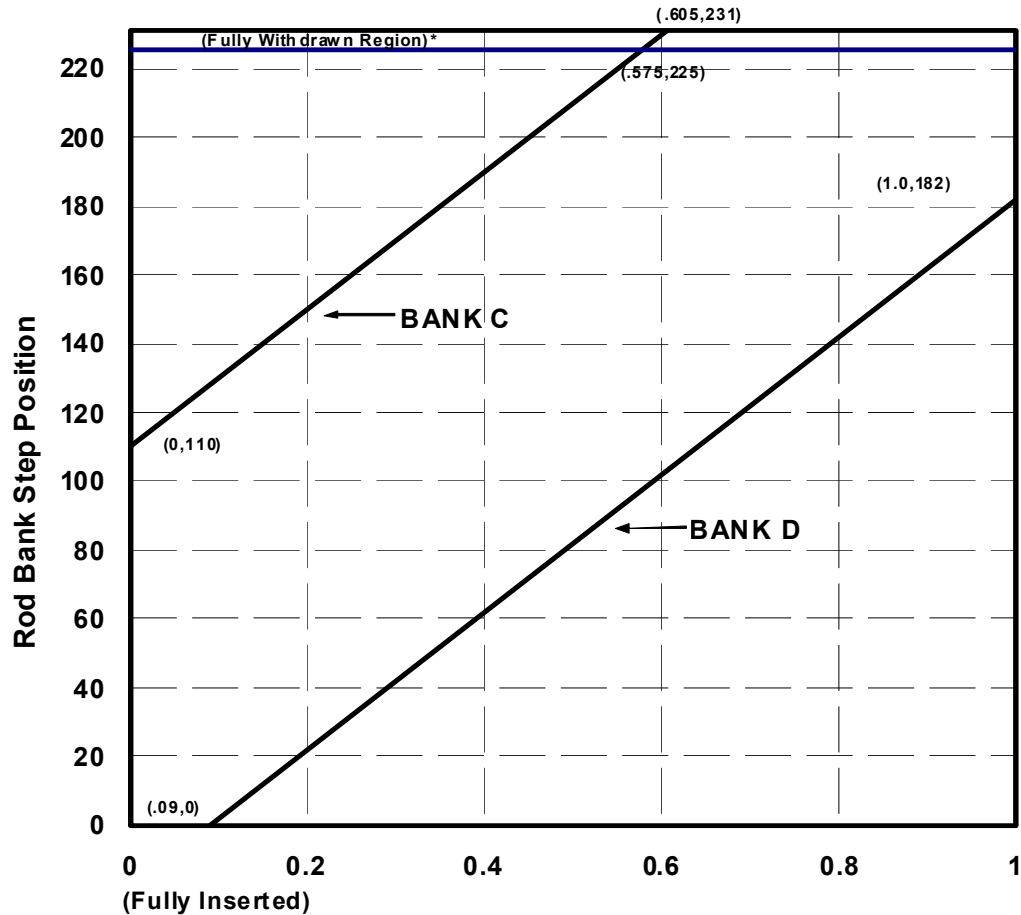

**FIGURE 1**  
**Rod Bank Insertion Limits Versus**  
**Thermal Power, Four Loop Operation**

\*Fully withdrawn region shall be the condition where shutdown and control banks are at a position within the interval of  $\geq 225$  and  $\leq 231$  steps withdrawn, inclusive.

Fully withdrawn shall be the position as defined below,


Cycle Burnup (MWd/mtU)  
 $\geq 0$

Steps Withdrawn  
 $\geq 225$  to  $\leq 231$

This figure is valid for operation at a rated thermal power of 3455 MWt when the LEFM is in operation.

If the LEFM becomes inoperable, then prior to the next NIS calibration, the maximum allowable power level must be reduced by 1.3% in power, and the rod insertion limit lines must be increased by 3 steps withdrawn until the LEFM is returned to operation.

# COLR FOR SEQUOYAH UNIT 1 CYCLE 13

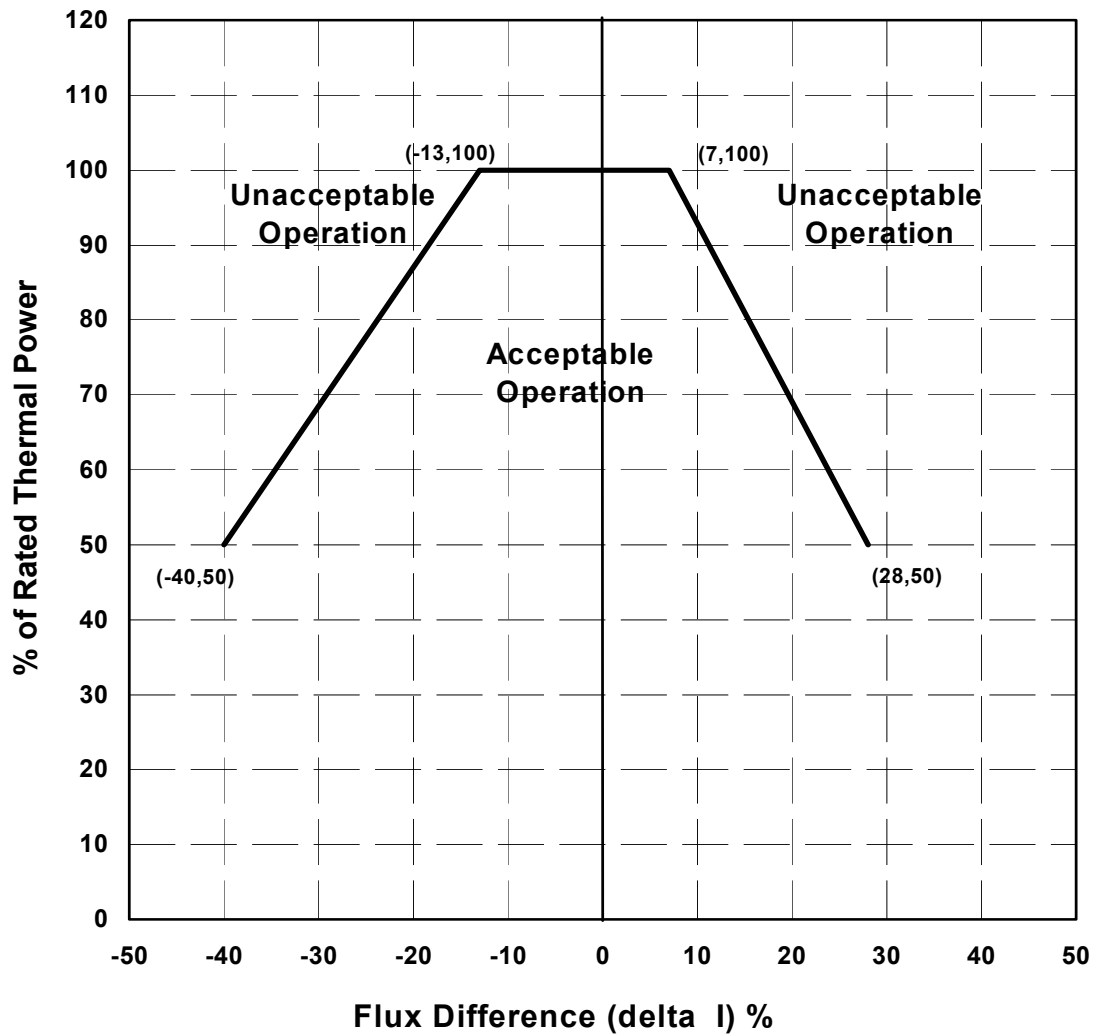


**FIGURE 2**

## **Axial Flux Difference Limits As A Function of Rated Thermal Power**

This figure is valid for operation at a rated thermal power of 3455 MWt when the LEFM is in operation.

If the LEFM becomes inoperable, then prior to the next NIS calibration, the maximum allowable power level must be reduced by 1.3% in power, and the AFD limit lines must be made more restrictive by 1% in AFD until the LEFM is returned to operation.

### COLR FOR SEQUOYAH UNIT 1 CYCLE 13

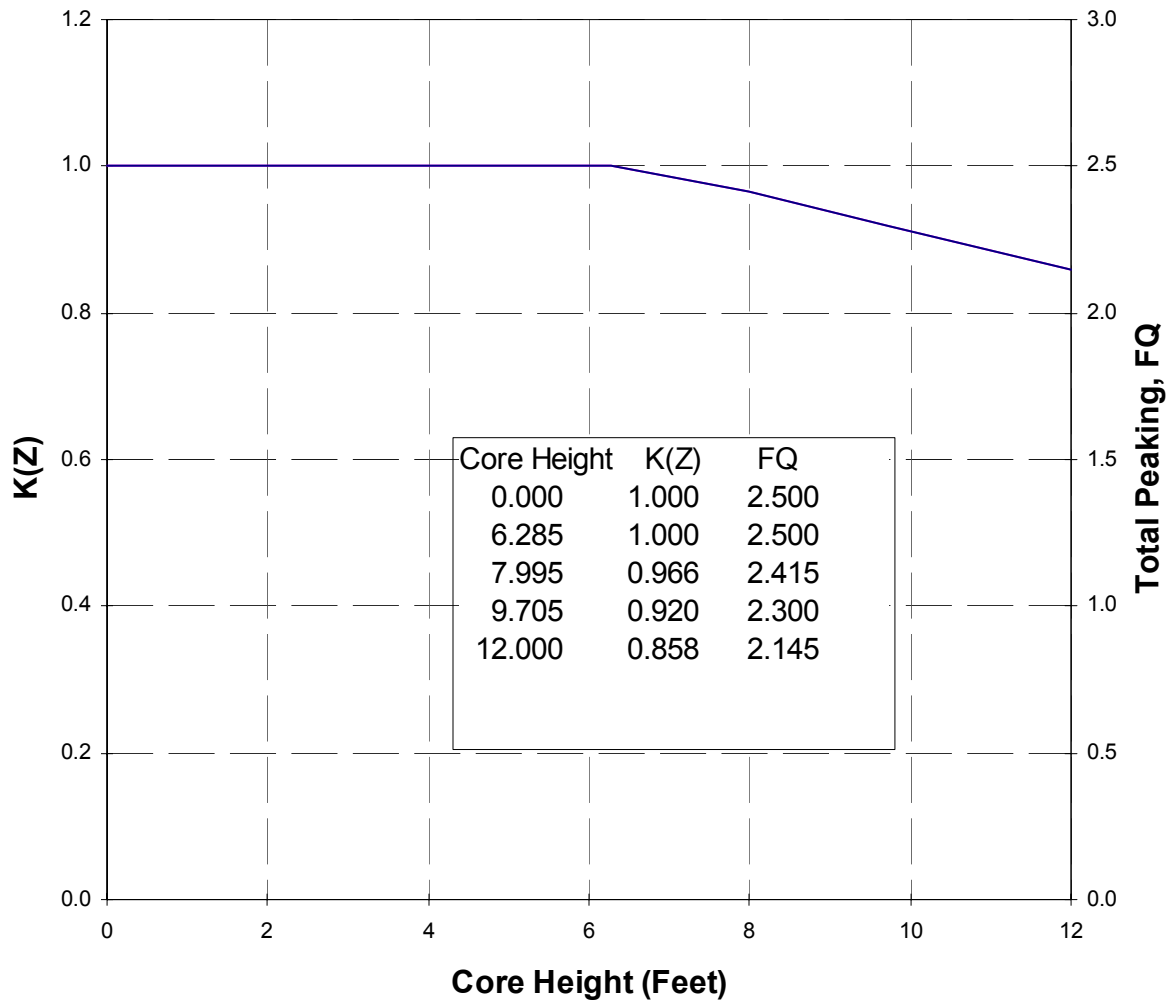

**FIGURE 3**

**K(Z) - Normalized FQ(X, Y, Z) as a Function of Core Height**