



RONALD A JONES
Vice President
Oconee Nuclear Site

Duke Power
ON01VP / 7800 Rochester Hwy.
Seneca, SC 29672

864 885 3158
864 885 3564 fax

October 26, 2005

U. S. Nuclear Regulatory Commission
Document Control Desk
Washington, D. C. 20555

Subject: Oconee Nuclear Site Docket No. 50-270
Core Operating Limits Report (COLR)

Gentlemen:

Attached, pursuant to Oconee Technical Specifications 5.6.5, is an information copy of a revision to the Core Operating Limits Report for Oconee Unit 2, Cycle 22, Rev. 25.

Very truly yours,

A handwritten signature in black ink, appearing to be 'R. A. Jones', written over the typed name.

R. A. Jones Site, Vice President
Oconee Nuclear Site

Attachment

1001

NRC Document Control Desk
October 26, 2005
Page 2

xc w/att: Mr. W. D. Travers, Regional Administrator
U. S. Nuclear Regulatory Commission, Region II

Mr. L. N. Olshan, Project Manager
Office of Nuclear Reactor Regulation

Mr. Mel Shannon
Senior Resident Inspector
Oconee Nuclear Site

PRIORITY SuperRush

DISPOSITION OF THE ORIGINAL DOCUMENT WILL BE TO
THE TRANSMITTAL SIGNATURE UNLESS RECIPIENT IS
OTHERWISE IDENTIFIED BELOW

- 1) 00620 DOC MGMT MICROFILM EC04T
- 2) 00813 DOC MGMT EC04T ORIGINAL
- 3) 06358 ONS REGUL COMPLIANCE ON03BC
- 4) 06700 ONS MANUAL MASTER FILE ON03DM
- 5) 06937 R R ST CLAIR EC08G

Duke Power Company
DOCUMENT TRANSMITTAL FORM

REFERENCE
NUCLEAR GENERAL OFFICE
OCONEE NUCLEAR STATION
WORK ITEM: EXEMPTION M-5
RESP GROUP: NE
RECORD RETENTION: 003587

OCONEE 2 CYCLE 22
CORE OPERATING LIMITS REPORT
Page 1 of 1

Date: 10/06/05

Document Transmittal #: DUK052790039

QA CONDITION

☒ Yes ☐ No

OTHER ACKNOWLEDGEMENT REQUIRED ☐ Yes

IF QA OR OTHER ACKNOWLEDGEMENT REQUIRED, PLEASE
ACKNOWLEDGE RECEIPT BY RETURNING THIS FORM TO:

Duke Power Company
P.O. Box 1006
Energy Center
EC04T
Charlotte, N.C

Rec'd By _____

Date _____

DOCUMENT NO	QA COND	REV # DATE	DISTR CODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	TOTAL
ONEI-0400-051	1	025 10/06/05	NOMD-27	V1	X	V1	V1	V1											4
FOR INFORMATION ONLY																			

REMARKS: DUKE
DOCUMENT RELEASE EXEMPT FROM NUCLEAR MODIFICATION PROGRAM

THOMAS C GEER
NUCLEAR STATION ENGR MANAGER
GS-SVP NUCLEAR SUPPORT

BY:

J W SIMMONS JWS/JAK EC08H

Duke Power Company

Oconee 2 Cycle 22

Core Operating Limits Report

QA Condition 1

FOR INFORMATION ONLY

Prepared By : L. D. McClain / *L. D. McClain*

Date : 06 Oct 2005

Checked By : J. D. Forster / *J. D. Forster*

Date : 06 OCT 2005

CDR By : S. L. Parrish / *S. L. Parrish*

Date : 6-10-05

Approved By : R. R. St. Clair / *R. R. St. Clair*

Date : 06 OCT 2005

INSPECTION OF ENGINEERING INSTRUCTIONS

Inspection Waived By: L.R. SAC
(Sponsor)Date: 10/6/05CATAWBA

	Inspection Waived	
MCE (Mechanical & Civil)	<input type="checkbox"/>	Inspected By/Date: _____
RES (Electrical Only)	<input type="checkbox"/>	Inspected By/Date: _____
RES (Reactor)	<input type="checkbox"/>	Inspected By/Date: _____
MOD	<input type="checkbox"/>	Inspected By/Date: _____
Other (_____)	<input type="checkbox"/>	Inspected By/Date: _____

OCONEE

	Inspection Waived	
MCE (Mechanical & Civil)	<input checked="" type="checkbox"/>	Inspected By/Date: _____
RES (Electrical Only)	<input checked="" type="checkbox"/>	Inspected By/Date: _____
RES (Reactor)	<input checked="" type="checkbox"/>	Inspected By/Date: _____
MOD	<input checked="" type="checkbox"/>	Inspected By/Date: _____
Other (_____)	<input type="checkbox"/>	Inspected By/Date: _____

MCGUIRE

	Inspection Waived	
MCE (Mechanical & Civil)	<input type="checkbox"/>	Inspected By/Date: _____
RES (Electrical Only)	<input type="checkbox"/>	Inspected By/Date: _____
RES (Reactor)	<input type="checkbox"/>	Inspected By/Date: _____
MOD	<input type="checkbox"/>	Inspected By/Date: _____
Other (_____)	<input type="checkbox"/>	Inspected By/Date: _____

Oconee 2 Cycle 22 Core Operating Limits Report

Insertion Sheet for Revision 25

This revision is not valid until the end of operation for Oconee 2 Cycle 21.

Remove these Revision 24 pages

1 - 33

Insert these Revision 25 pages

1 - 33

Revision Log

Revision	Effective Date	Pages Revised	Pages Added	Pages Deleted	Total Effective Pages
Oconee 2 Cycle 22 revisions below					
25	Oct 2005	1 - 33		-	33
Oconee 2 Cycle 21 revisions below					
24	Aug 2005	1 - 4, 6		-	33
23	Mar 2005	1 - 5		-	33
22	Dec 2004	1 - 3, 30		-	33
21	Apr 2004	1 - 33		-	33
Oconee 2 Cycle 20 revisions below					
20	Feb 2004	1 - 3, 5	-	-	33
19	Nov 2003	1-4,8-10,12-13,29	1a	-	33
18	Oct 2002	1-3,14,16,24,30	-	-	32
17	Oct 2002	1 - 31	32	-	32
Oconee 2 Cycle 19 revisions below					
16	May 2001	1 - 31	-	-	31
Oconee 2 Cycle 18 revisions below					
15	Apr 2001	1 - 4	-	-	31
14	Feb 2000	1 - 4	-	-	31
13	Nov 1999	1 - 31	-	-	31
12	Sep 1999	1 - 31	-	-	31
11	Apr 1999	1 - 4, 6	-	-	31
10	Mar 1999	1 - 31	-	-	31

Oconee 2 Cycle 22

1.0 Error Adjusted Core Operating Limits

The Core Operating Limits Report for O2C22 has been prepared in accordance with the requirements of TS 5.6.5. The core operating limits within this report have been developed using NRC approved methodology identified in references 1 through 11. The RPS protective limits and maximum allowable setpoints are documented in references 12 through 14. These limits are validated for use in O2C22 by references 15 through 16. The O2C22 analyses assume a design flow of 107.5% of 88,000 gpm per RCS pump, radial local peaking ($F_{\Delta h}$) of 1.714, and axial peaking factor (F_z) of 1.5, and an EOC (< 100 ppmB) Tavq reduction of up to 10°F provided 4 RCPs are in operation and Tavq does not decrease below 569°F.

The error adjusted core operating limits included in section 1 of the report incorporate all necessary uncertainties and margins required for operation of the O2C22 reload core.

1.1 References

1. Nuclear Design Methodology Using CASMO-3 / SIMULATE-3P, DPC-NE-1004-A, Revision 0, SER dated November 23, 1992.
2. Oconee Nuclear Station Reload Design Methodology II, DPC-NE-1002-A, Revision 2, SER dated October 1, 1985.
3. Oconee Nuclear Station Reload Design Methodology, NFS-1001A, Revision 5, SER dated December 8, 2000.
4. ONS Core Thermal Hydraulic Methodology Using VIPRE-01, DPC-NE-2003-PA, Revision 1, SER dated June 23, 2000.
5. Thermal Hydraulic Statistical Core Design Methodology, DPC-NE-2005-PA, Revision 3, SER dated September 2002.
6. Fuel Mechanical Reload Analysis Methodology Using TACO3, DPC-NE-2008-PA, Revision 0, SER dated April 3, 1995.
7. UFSAR Chapter 15 Transient Analysis Methodology, DPC-NE-3005-PA, Revision 2, SER dated September 24, 2003.
8. Thermal Hydraulic Transient Analysis Methodology, DPC-NE-3000-PA, Rev. 3, SER dated September 24, 2003.
9. BAW-10192-PA, BWNT LOCA - BWNT Loss of Coolant Accident Evaluation Model for Once-Through Steam Generator Plants, SER dated February 18, 1997.
10. BAW-10164P-A, Rev. 4, "RELAP5/MOD2-B&W - An Advanced Computer Program for Light Water Reactor LOCA and Non-LOCA Transient Analysis", SER dated April 9, 2002.
11. BAW-10227-PA, Evaluation of Advanced Cladding and Structural Material (M5) in PWR Reactor Fuel, Rev. 1, June 2003 (SER to BAW-10186P-A dated June 18, 2003).
12. RPS RCS Pressure & Temperature Trip Function Uncertainty Analyses and Variable Low Pressure Safety Limit, OSC-4048, Revision 4, January 2001.
13. Power Imbalance Safety Limits and Tech Spec Setpoints Using Error Adjusted Flux-Flow Ratio of 1.094, OSC-5604, Revision 2, October 2001.
14. ΔT_c and EOC Reduced Tavq Operation, OSC-7265, Rev. 1, Duke Power Co., June 2002.
15. O2C22 Maneuvering Analysis, OSC-8800, Revision 1, October 2005.
16. O2C22 Reload Safety Evaluation, OSC-8822, Revision 0, October 2005.

Oconee 2 Cycle 22

Miscellaneous Setpoints

BWST boron concentration shall be greater than 2220 ppm and less than 3000 ppm.
Referred to by TS 3.5.4.

Spent fuel pool boron concentration shall be greater than 2220 ppm.
Referred to by TS 3.7.12.

The equivalent of at least 1100 cubic feet of 11,000 ppm boron shall be maintained in the CBAST.
Referred to by TS SLC 16.5.13.

CFT boron concentration shall be greater than 1873 ppm. The average boron concentration in the CFT's shall be less than 4000 ppm. Referred to by TS 3.5.1.

RCS and Refueling canal boron concentration shall be greater than 2220 ppm.
Referred to by TS 3.9.1.

Shutdown Margin (SDM) shall be greater than 1% $\Delta k/k$.
Referred to by TS 3.1.1.

Moderator Temperature Coefficient (MTC) shall be less than:
Linear interpolation is valid within the table provided.
Referred to by TS 3.1.3.

$\Delta p / ^\circ F$	% FP
+0.70	0
+0.525	20
0.00	80
0.00	100
0.00	120

Departure from Nucleate Boiling (DNB) parameter for RCS loop pressure shall be

Referred to by TS 3.4.1. 4 RCP: measured hot leg pressure \geq 2125 psig
3 RCP: measured hot leg pressure \geq 2125 psig

DNB parameter for RCS loop average temperature shall be:
Referred to by TS 3.4.1.

The measured Tavg must be less than COLR limits minus instrument uncertainty. ΔT_c is the setpoint value selected by the operators. Values are expanded by linear interpolation on page 33 of this document without instrument uncertainty.

$\Delta T_c, ^\circ F$	Max Loop Tavg (Incl $2^\circ F$ unc)	
	4 RCP Op	3 RCP Op
0	581.0	581.0 *
1	581.4	581.2
2	581.8	581.4
3	582.1	581.7
4	582.5	581.9
5	582.9	582.1

* This limit is applied to the loop with the lowest loop average temperature consistent with the NOTE in SR 3.4.1.2. All other temperature limits apply to the maximum loop Tavg.

DNB parameter for RCS loop total flow shall be: 4 RCP: Measured \geq 107.5 %df
Referred to by TS 3.4.1. 3 RCP: Measured \geq 74.7 % of 4 RCP min flow

Regulating rod groups shall be withdrawn in sequence starting with group 5, group 6, and finally group 7.
Referred to by TS 3.2.1.

Regulating rod group overlap shall be $25\% \pm 5\%$ between two sequential groups.
Referred to by TS 3.2.1.

Misaligned, dropped, or inoperable rods may be excluded from control rod group average calculations when determining if overlap requirements are met as these situations are explicitly addressed by TS 3.1.4 (Control Rod Group Alignment Limits), TS 3.1.5 (Safety Rod Position Limits), and TS 3.2.3 (Quadrant Power Tilt).

Oconee 2 Cycle 22

Steady State Operating Band

EFPD	Rod Index		APSR %WD	
	Min	Max	Min	Max
0 to EOC	292 ± 5	300	30	40

Quadrant Power Tilt Setpoints

Core Power Level, %FP	Steady State		Transient		Maximum
	30 - 100	0 - 30	30 - 100	0 - 30	
Full Incore	3.50	7.82	7.32	9.61	16.76
Out of Core	2.35	6.09	5.63	7.72	14.22
Backup Incore	2.25	3.87	3.63	4.81	10.07

Referred to by TS 3.2.3


Correlation Slope (CS)

1.15

Referred to by TS 3.3.1 (SR 3.3.1.3).

Oconee 2 Cycle 22
Variable Low RCS Pressure RPS Setpoints

Referred to by TS 3.3.1

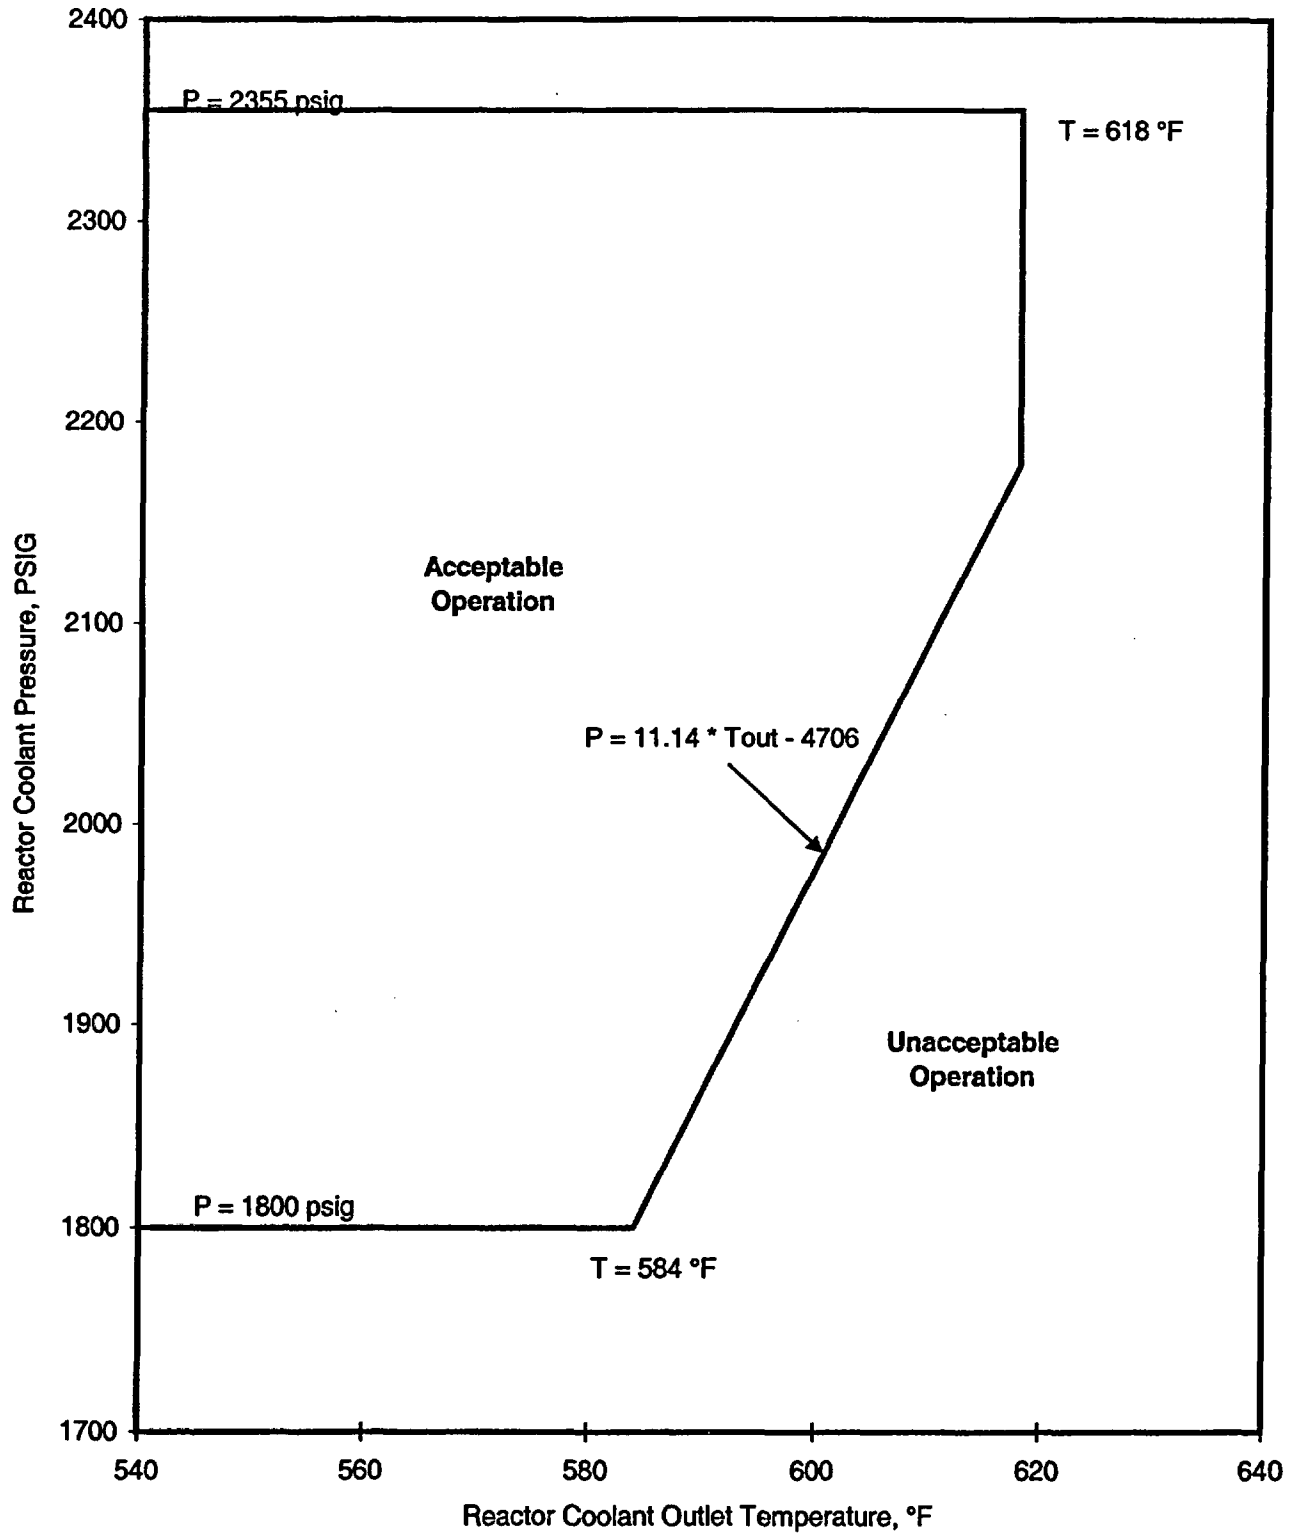

Oconee 2 Cycle 22

RPS Power Imbalance Setpoints

	% FP	% Imbalance
4 Pumps	0	-33.0
	90.4	-33.0
	107.9	-14.4
	107.9	14.4
	90.4	33.0
	0	33.0
3 Pumps	0	-33.0
	63.1	-33.0
	80.6	-14.4
	80.6	14.4
	63.1	33.0
	0	33.0

Maximum Allowable RPS Power Imbalance Limits

	% FP	% Imbalance
4 Pumps	0	-35.0
	90.0	-35.0
	109.4	-14.4
	109.4	14.4
	90.0	35.0
	0	35.0
3 Pumps	0	-35.0
	62.3	-35.0
	81.7	-14.4
	81.7	14.4
	62.3	35.0
	0	35.0

Oconee 2 Cycle 22

Operational Power Imbalance Setpoints

	%FP	Full Incore	Backup Incore	Out of Core
4 Pumps	0	-31.5	-31.1	-31.5
	80	-31.5	-31.1	-31.5
	90	-27.2	-27.0	-27.2
	100	-19.1	-18.9	-19.1
	102	-17.0	-17.0	-17.0
	102	17.0	17.0	17.0
	100	19.1	18.9	19.1
	90	27.7	27.3	27.7
	80	27.7	27.3	27.7
	0	27.7	27.3	27.7
3 Pumps	0.0	-31.5	-31.1	-31.5
	63.34	-31.5	-	-31.5
	63.72	-	-31.1	-
	77.0	-17.0	-17.0	-17.0
	77.0	17.0	17.0	17.0
	67.30	-	27.3	-
	66.92	27.7	-	27.7
	0.0	27.7	27.3	27.7

Oconee 2 Cycle 22
Operational Power Imbalance Setpoints
Operation with 4 RCS Pumps, BOC to EOC

% FP	RPS Trip		Full Incore Alarm		Out of Core Alarm	
107.9	-14.40	14.40				
107	-15.35	15.36				
106	-16.41	16.42				
105	-17.48	17.48				
104	-18.54	18.55				
103	-19.60	19.61				
102	-20.67	20.67	-17.00	17.00	-17.00	17.00
101	-21.73	21.73	-18.05	18.05	-18.05	18.05
100	-22.79	22.80	-19.10	19.10	-19.10	19.10
99	-23.86	23.86	-19.91	19.96	-19.91	19.96
98	-24.92	24.92	-20.72	20.82	-20.72	20.82
97	-25.98	25.99	-21.53	21.68	-21.53	21.68
96	-27.05	27.05	-22.34	22.54	-22.34	22.54
95	-28.11	28.11	-23.15	23.40	-23.15	23.40
94	-29.17	29.17	-23.96	24.26	-23.96	24.26
93	-30.24	30.24	-24.77	25.12	-24.77	25.12
92	-31.30	31.30	-25.58	25.98	-25.58	25.98
91	-32.36	32.36	-26.39	26.84	-26.39	26.84
90.40	-33.00	33.00	-26.88	27.36	-26.88	27.36
90	-33.00	33.00	-27.20	27.70	-27.20	27.70
89	-33.00	33.00	-27.63	27.70	-27.63	27.70
88	-33.00	33.00	-28.06	27.70	-28.06	27.70
87	-33.00	33.00	-28.49	27.70	-28.49	27.70
86	-33.00	33.00	-28.92	27.70	-28.92	27.70
85	-33.00	33.00	-29.35	27.70	-29.35	27.70
84	-33.00	33.00	-29.78	27.70	-29.78	27.70
83	-33.00	33.00	-30.21	27.70	-30.21	27.70
82	-33.00	33.00	-30.64	27.70	-30.64	27.70
81	-33.00	33.00	-31.07	27.70	-31.07	27.70
80	-33.00	33.00	-31.50	27.70	-31.50	27.70
0	-33.00	33.00	-31.50	27.70	-31.50	27.70
% FP	RPS Trip		Full Incore Alarm		Out of Core Alarm	


Oconee 2 Cycle 22
Operational Power Imbalance Setpoints
Operation with 3 RCS Pumps, BOC to EOC

% FP	RPS Trip		Full Incore Alarm		Out of Core Alarm	
80.6	-14.40	14.40				
80	-15.03	15.04				
79	-16.10	16.10				
78	-17.16	17.16				
77.0	-18.22	18.23	-17.00	17.00	-17.00	17.00
76	-19.29	19.29	-18.06	18.06	-18.06	18.06
75	-20.35	20.35	-19.12	19.12	-19.12	19.12
74	-21.41	21.41	-20.18	20.19	-20.18	20.19
73	-22.47	22.48	-21.25	21.25	-21.25	21.25
72	-23.54	23.54	-22.31	22.31	-22.31	22.31
71	-24.60	24.60	-23.37	23.37	-23.37	23.37
70	-25.66	25.67	-24.43	24.43	-24.43	24.43
69	-26.73	26.73	-25.49	25.49	-25.49	25.49
68	-27.79	27.79	-26.55	26.56	-26.55	26.56
67	-28.85	28.85	-27.62	27.62	-27.62	27.62
66.9	-28.94	28.94	-27.70	27.70	-27.70	27.70
66	-29.92	29.92	-28.68	27.70	-28.68	27.70
65	-30.98	30.98	-29.74	27.70	-29.74	27.70
64	-32.04	32.04	-30.80	27.70	-30.80	27.70
63.3	-32.74	32.74	-31.50	27.70	-31.50	27.70
63.1	-33.00	33.00	-31.50	27.70	-31.50	27.70
63	-33.00	33.00	-31.50	27.70	-31.50	27.70
62	-33.00	33.00	-31.50	27.70	-31.50	27.70
61	-33.00	33.00	-31.50	27.70	-31.50	27.70
60	-33.00	33.00	-31.50	27.70	-31.50	27.70
0	-33.00	33.00	-31.50	27.70	-31.50	27.70
% FP	RPS Trip		Full Incore Alarm		Out of Core Alarm	


Oconee 2 Cycle 22
RPS Power Imbalance Setpoints

Referred to by TS 3.3.1

Thermal Power Level, %FP

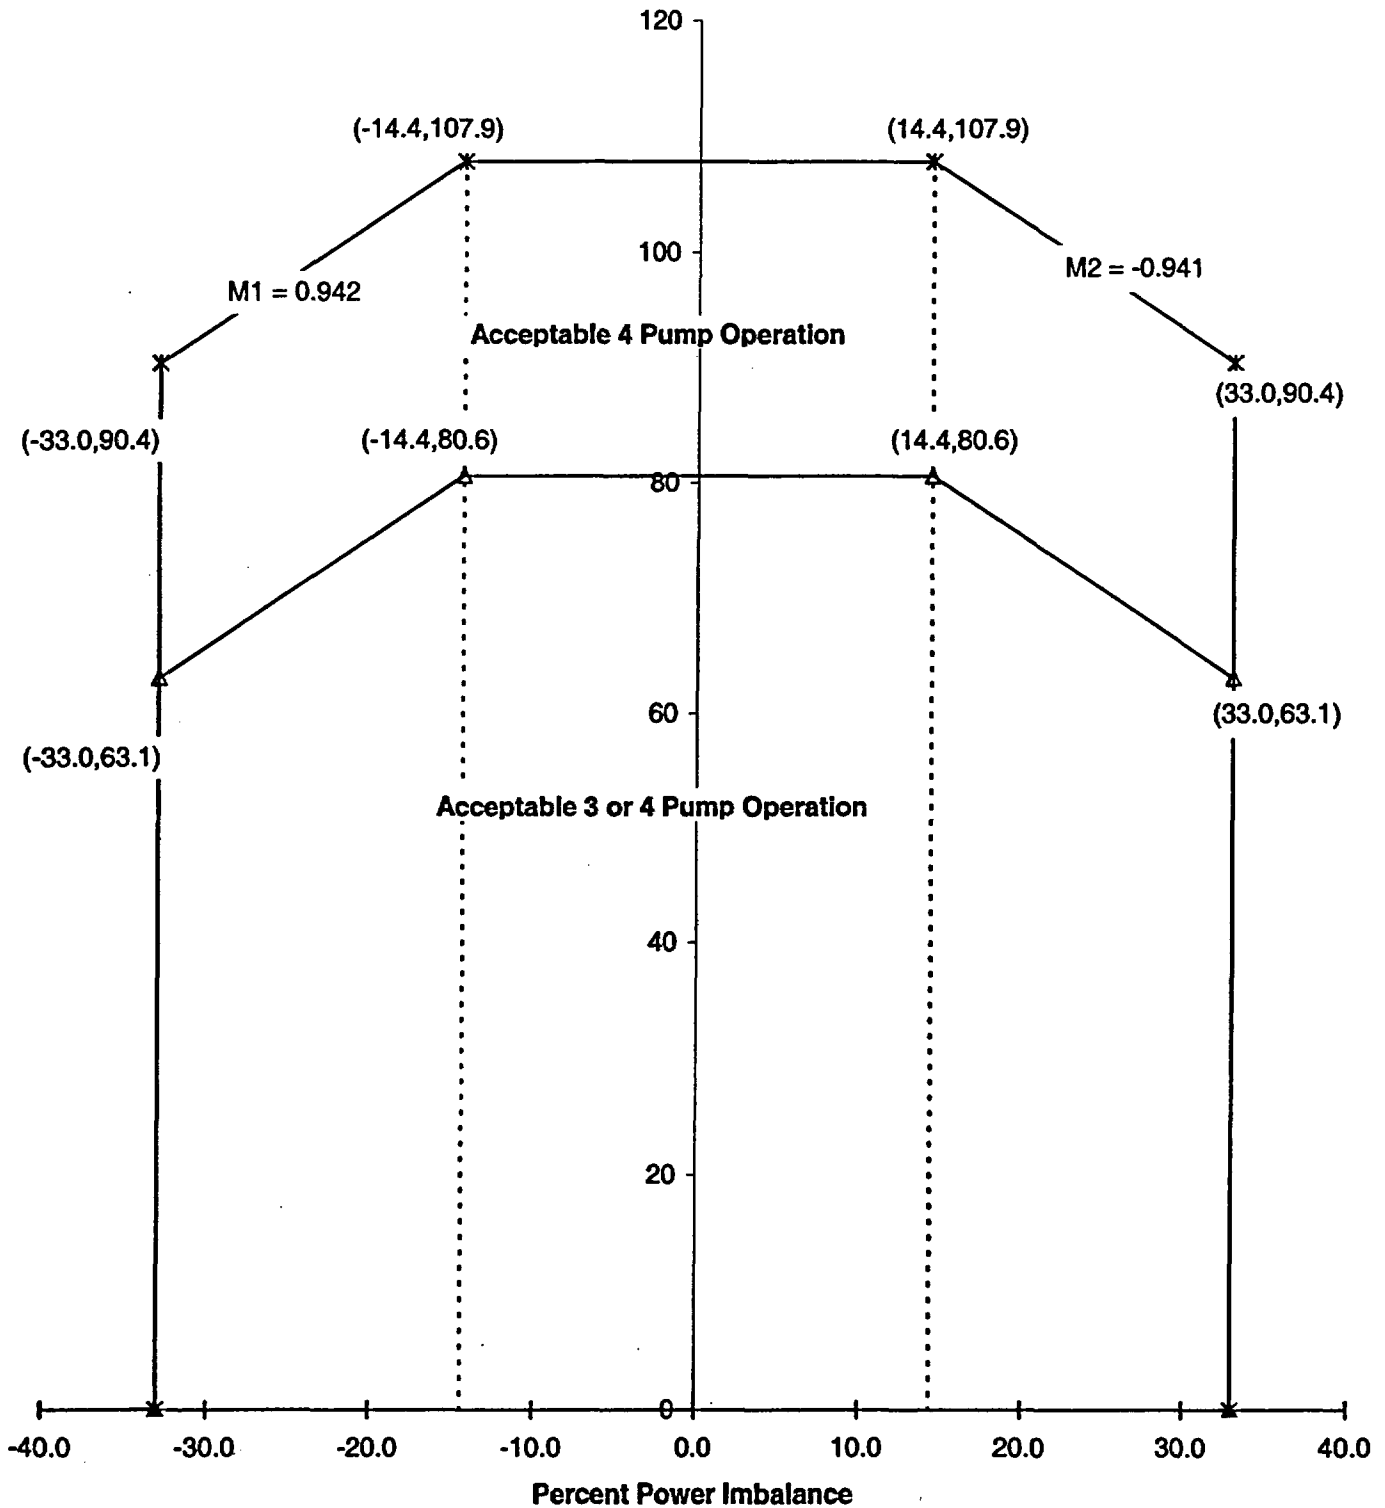


Oconee 2 Cycle 22
Imbalance Setpoints for 4 Pump Operation, BOC to EOC

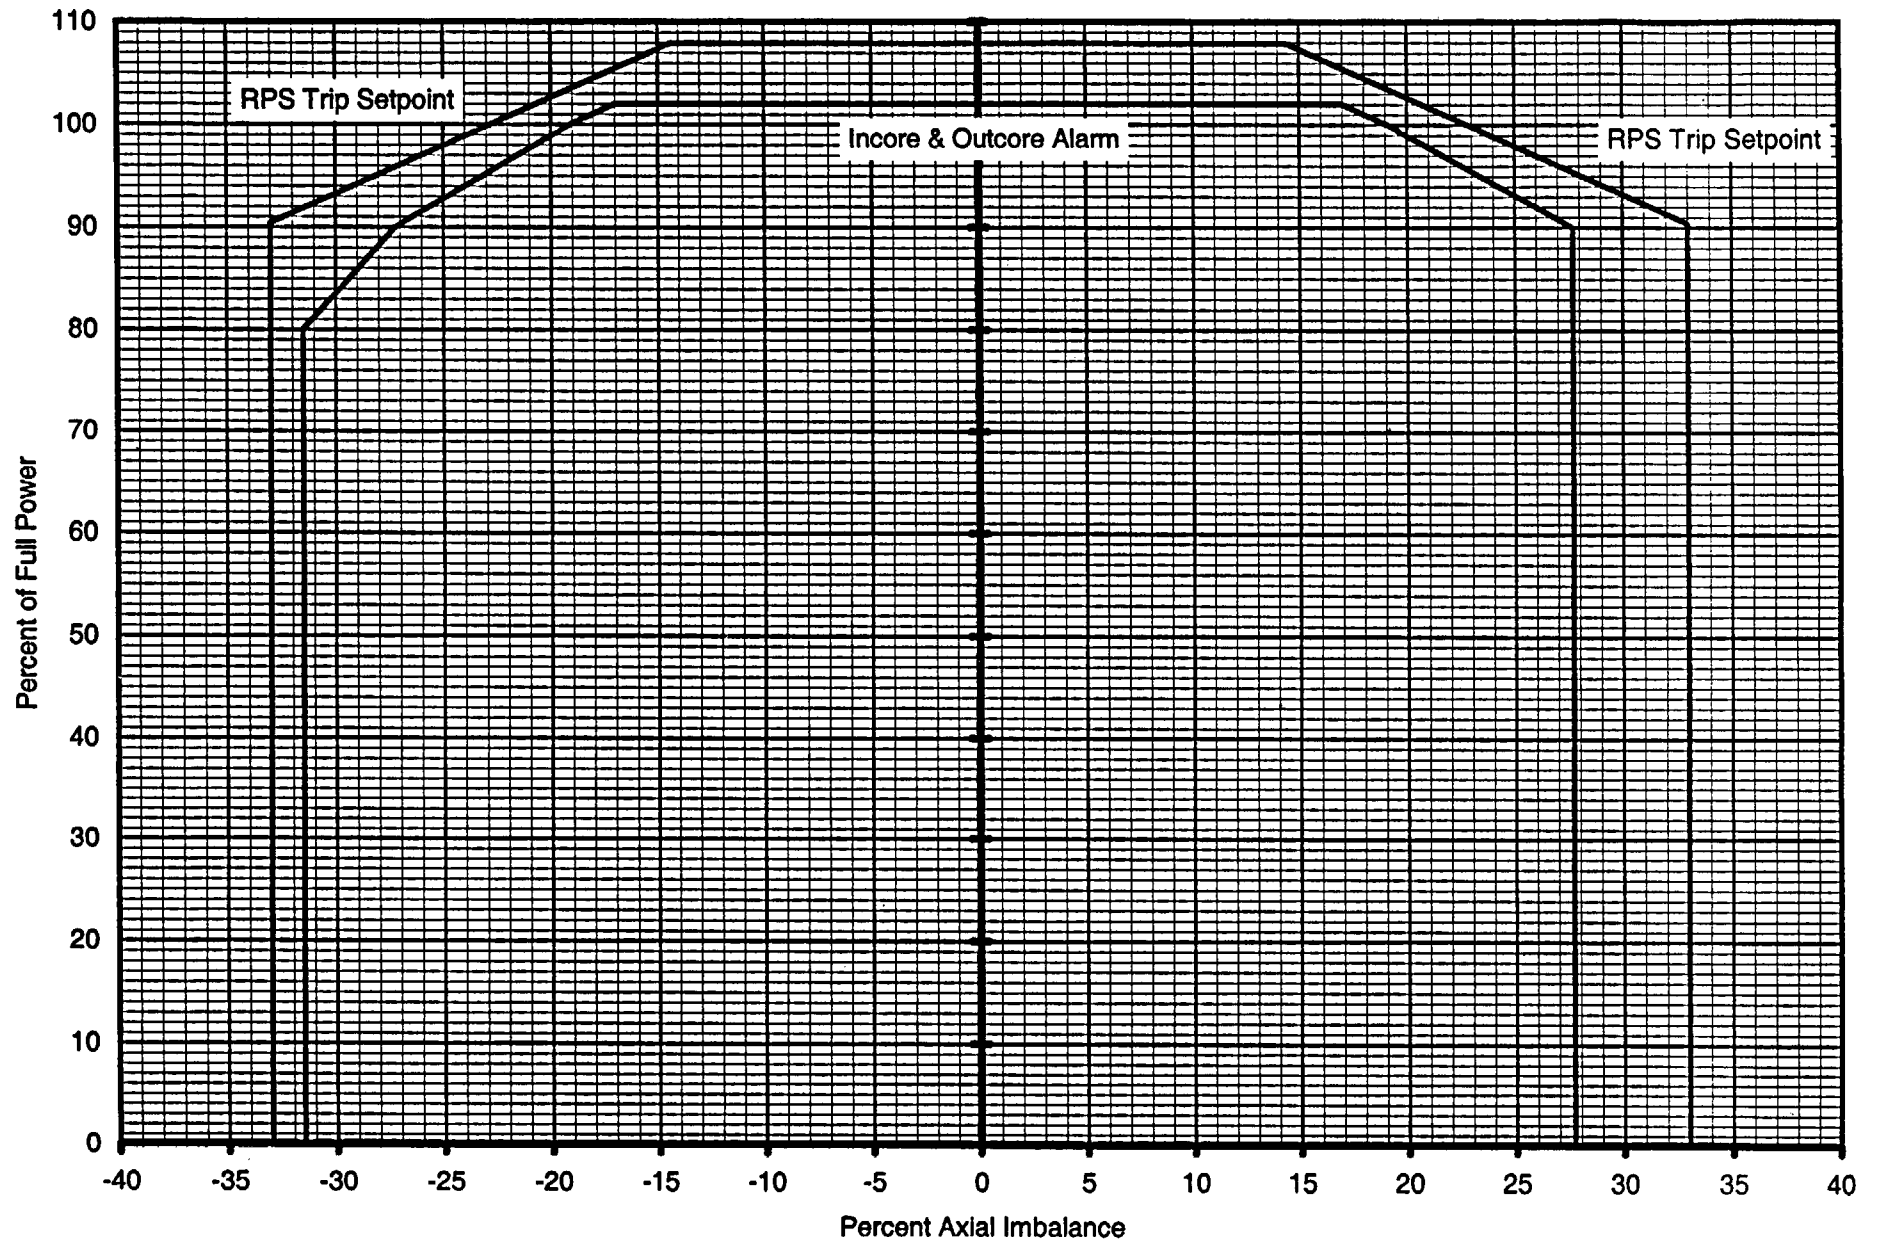

Oconee 2 Cycle 22

Imbalance Setpoints for 3 Pump Operation, BOC to EOC

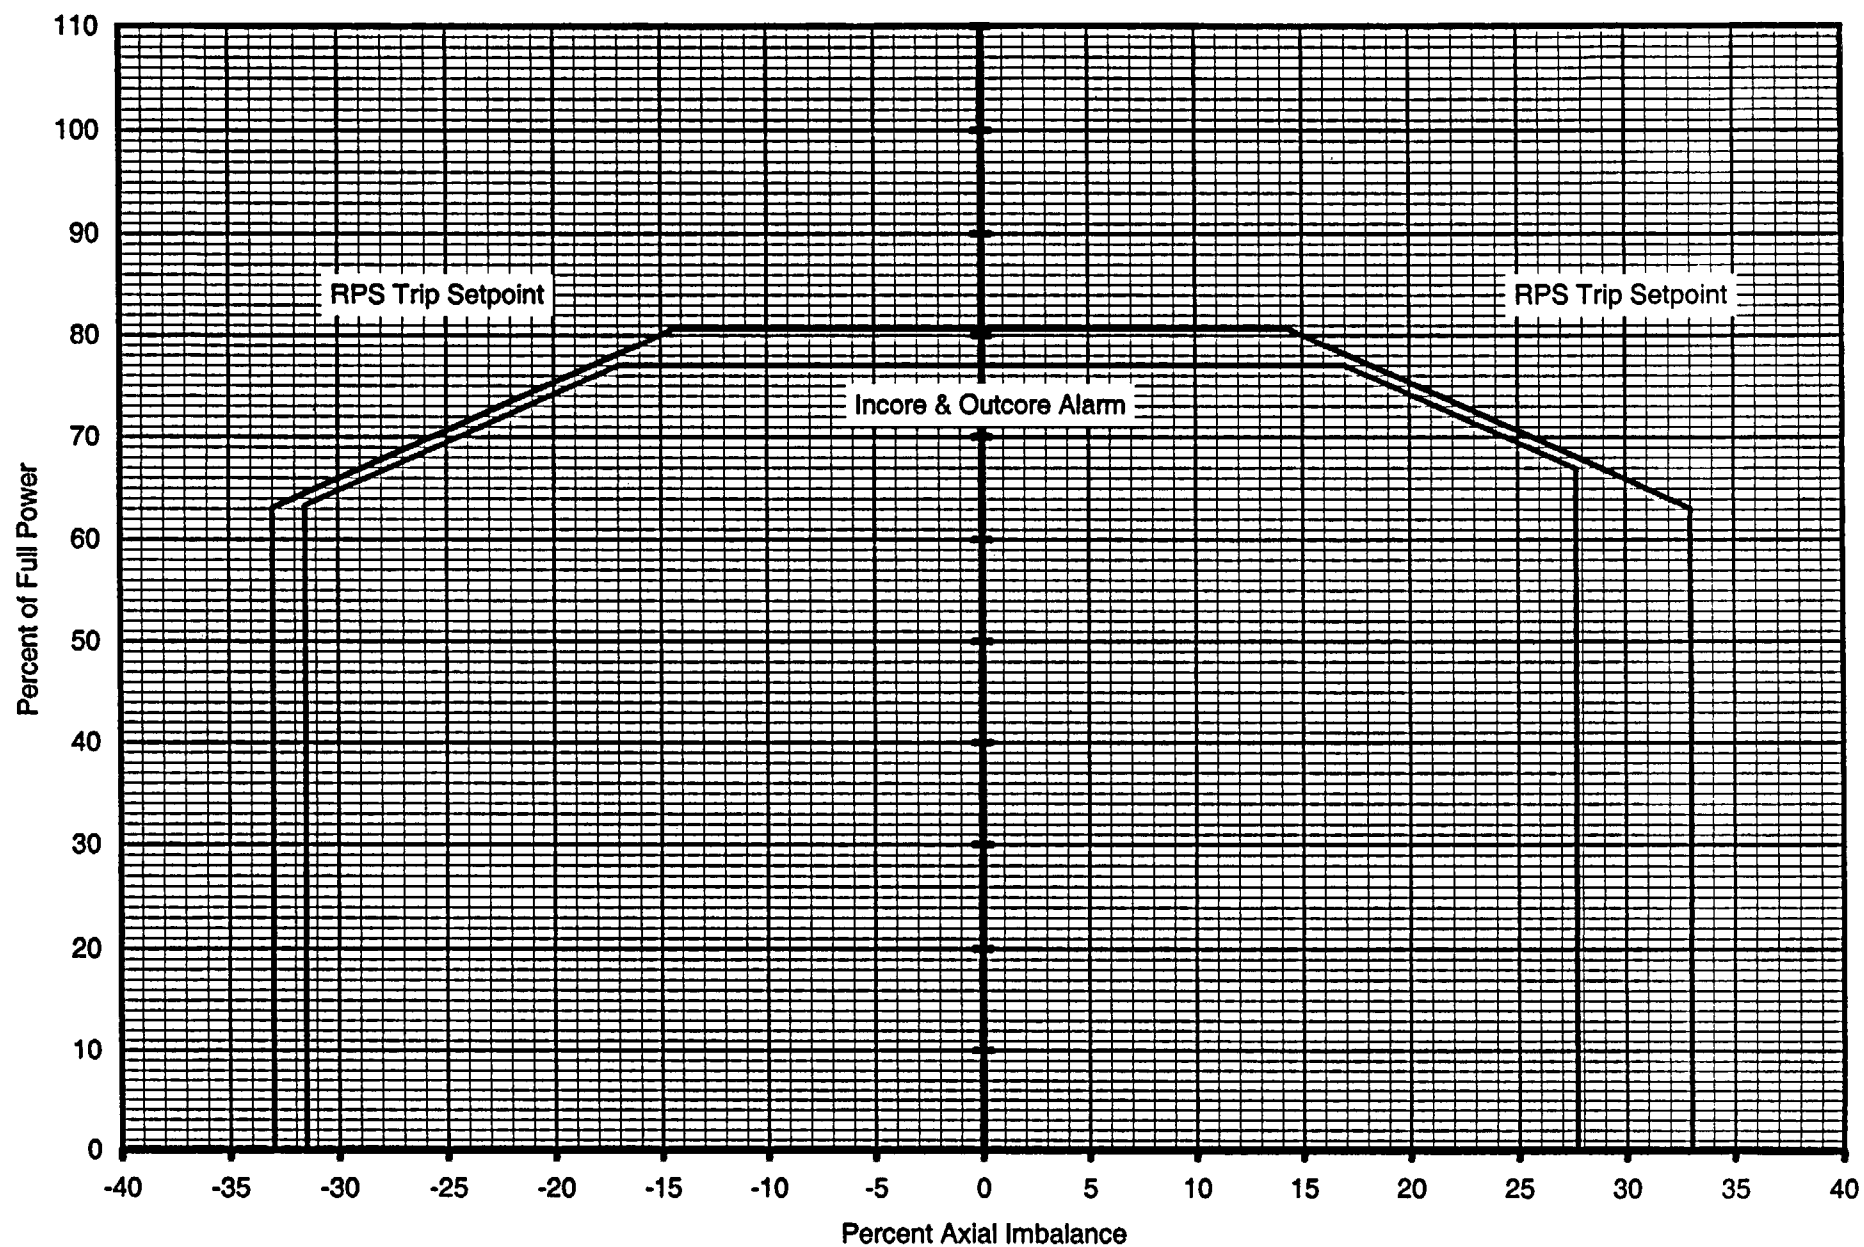

Oconee 2 Cycle 22

Operational Rod Index Setpoints

	%FP	RI Insertion Setpoint		RI Withdrawal Setpoint
		No Inop Rod	1 Inop Rod	
4 Pumps	102.0	263.5	283.4	300
	100.0	261.5	281.5	300
	90.0	251.5	271.9	300
	80.0	251.5	262.3	300
	50.0	201.5	233.4	300
	48.0	195.2	231.5	300
	15.0	91.5	165.5	300
	13.0	76.5	161.5	300
	5.0	16.5	93.5	300
	3.0	1.5	76.5	300
	2.8	0.0	74.8	300
	0.0	0.0	51.0	300
3 Pumps	77.0	246.5	285.2	300
	75.0	243.2	281.5	300
	50.0	201.5	235.2	300
	48.0	195.2	231.5	300
	15.0	91.5	165.5	300
	13.0	76.5	161.5	300
	5.0	16.5	93.5	300
	3.0	1.5	76.5	300
	2.8	0.0	74.8	300
	0.0	0.0	51.0	300

Oconee 2 Cycle 22

Shutdown Margin Rod Index Setpoints

	%FP	RI Insertion Setpoint		RI Withdrawal Setpoint
		No Inop Rod	1 Inop Rod	
4 Pumps	102.0	224.6	283.4	300
	100.0	221.5	281.5	300
	48.0	141.5	231.5	300
	13.0	76.5	161.5	300
	3.0	1.5	76.5	300
	2.8	0.0	74.8	300
	0.0	0.0	51.0	300
3 Pumps	77.0	227.4	285.2	300
	75.0	221.5	281.5	300
	48.0	141.5	231.5	300
	13.0	76.5	161.5	300
	3.0	1.5	76.5	300
	2.8	0.0	74.8	300
	0.0	0.0	51.0	300

Oconee 2 Cycle 22
Rod Index Setpoints

ONEI-0400-51 Rev 25

Page 17 of 33

4 Pump Operation, No Inoperable Rods, BOC to EOC

% FP	Shutdown Margin Setpoint			Operational Alarm Setpoint		
	CRGP 5	CRGP 6	CRGP 7	CRGP 5	CRGP 6	CRGP 7
102	100	99.8	24.8	100	100	63.5
101	100	99.0	24.0	100	100	62.5
100	100	98.2	23.2	100	100	61.5
99	100	97.5	22.5	100	100	60.5
98	100	96.7	21.7	100	100	59.5
97	100	95.9	20.9	100	100	58.5
96	100	95.2	20.2	100	100	57.5
95	100	94.4	19.4	100	100	56.5
94	100	93.6	18.6	100	100	55.5
93	100	92.9	17.9	100	100	54.5
92	100	92.1	17.1	100	100	53.5
91	100	91.3	16.3	100	100	52.5
90	100	90.6	15.6	100	100	51.5
89	100	89.8	14.8	100	100	51.5
88	100	89.0	14.0	100	100	51.5
87	100	88.2	13.2	100	100	51.5
86	100	87.5	12.5	100	100	51.5
85	100	86.7	11.7	100	100	51.5
84	100	85.9	10.9	100	100	51.5
83	100	85.2	10.2	100	100	51.5
82	100	84.4	9.4	100	100	51.5
81	100	83.6	8.6	100	100	51.5
80	100	82.9	7.9	100	100	51.5
79	100	82.1	7.1	100	100	49.8
78	100	81.3	6.3	100	100	48.2
77	100	80.6	5.6	100	100	46.5
76	100	79.8	4.8	100	100	44.8
75	100	79.0	4.0	100	100	43.2
74	100	78.2	3.2	100	100	41.5
73	100	77.5	2.5	100	100	39.8
72	100	76.7	1.7	100	100	38.2
71	100	75.9	0.9	100	100	36.5
70	100	75.2	0.2	100	100	34.8
69.8	100	75.0	0	100	100	34.5
69	100	73.8	0	100	100	33.2
68	100	72.3	0	100	100	31.5
67	100	70.7	0	100	100	29.8
66	100	69.2	0	100	100	28.2
65	100	67.7	0	100	100	26.5
64.1	100	66.3	0	100	100	25.0
63	100	64.6	0	100	99	24.1
62	100	63.0	0	100	98	23.2
61	100	61.5	0	100	97	22.4
60	100	60.0	0	100	96.6	21.6
59	100	58.4	0	100	95.8	20.8
58	100	56.9	0	100	94.9	19.9
57	100	55.3	0	100	94.1	19.1
56	100	53.8	0	100	93.2	18.2
55	100	52.3	0	100	92.4	17.4
54	100	50.7	0	100	91.6	16.6
53	100	49.2	0	100	90.8	15.8
52	100	47.7	0	100	89.9	14.9
51	100	46.1	0	100	89.1	14.1
50	100	44.6	0	100	88.2	13.2
49	100	43.0	0	100	86.7	11.7
% FP	CRGP 5	CRGP 6	CRGP 7	CRGP 5	CRGP 6	CRGP 7
	Shutdown Margin Setpoint			Operational Alarm Setpoint		

RI = 300 is withdrawal limit at all power levels.

Continued on next page.

Oconee 2 Cycle 22
Rod Index Setpoints
4 Pump Operation, No Inoperable Rods, BOC to EOC

ONEI-0400-51 Rev 25
Page 18 of 33

% FP	Shutdown Margin Setpoint			Operational Alarm Setpoint		
	CRGP 5	CRGP 6	CRGP 7	CRGP 5	CRGP 6	CRGP 7
48	100	41.5	0	100	85.1	10.1
47	100	39.6	0	100	83.5	8.5
46	100	37.8	0	100	82.0	7.0
45	100	35.9	0	100	80.4	5.4
44	100	34.1	0	100	78.8	3.8
43	100	32.2	0	100	77.2	2.2
42	100	30.4	0	100	75.7	0.7
41.6	100	29.6	0	100	75.0	0.0
41	100	28.5	0	100	73.2	0
40	100	26.6	0	100	70.1	0
39.1	100	25.0	0	100	67.3	0
39	99.9	24.9	0	100	66.9	0
38	99.0	24.0	0	100	63.8	0
37	98.0	23.0	0	100	60.6	0
36	97.1	22.1	0	100	57.5	0
35	96.2	21.2	0	100	54.3	0
34	95.2	20.2	0	100	51.2	0
33	94.3	19.3	0	100	48.1	0
32	93.4	18.4	0	100	44.9	0
31	92.5	17.5	0	100	41.8	0
30	91.5	16.5	0	100	38.6	0
29	90.6	15.6	0	100	35.5	0
28	89.7	14.7	0	100	32.4	0
27	88.8	13.8	0	100	29.2	0
26	87.8	12.8	0	100	26.1	0
25.7	87.5	12.5	0	100	25.0	0
25	86.9	11.9	0	99	24.0	0
24	86.0	11.0	0	97.4	22.4	0
23	85.0	10.0	0	95.8	20.8	0
22	84.1	9.1	0	94.2	19.2	0
21	83.2	8.2	0	92.7	17.7	0
20	82.2	7.2	0	91.1	16.1	0
19	81.3	6.3	0	89.5	14.5	0
18	80.4	5.4	0	88.0	13.0	0
17	79.5	4.5	0	86.4	11.4	0
16	78.5	3.5	0	84.8	9.8	0
15	77.6	2.6	0	83.2	8.2	0
14	76.7	1.7	0	79.5	4.5	0
13	75.8	0.8	0	75.8	0.8	0
12.8	75.0	0.0	0	75.0	0.0	0
12	69.0	0	0	69.0	0	0
11	61.5	0	0	61.5	0	0
10	54.0	0	0	54.0	0	0
9	46.5	0	0	46.5	0	0
8	39.0	0	0	39.0	0	0
7	31.5	0	0	31.5	0	0
6	24.0	0	0	24.0	0	0
5	16.5	0	0	16.5	0	0
4	9.0	0	0	9.0	0	0
3	1.5	0	0	1.5	0	0
2.8	0.0	0	0	0.0	0	0
2	0	0	0	0	0	0
1	0	0	0	0	0	0
0	0	0	0	0	0	0
% FP	CRGP 5	CRGP 6	CRGP 7	CRGP 5	CRGP 6	CRGP 7
	Shutdown Margin Setpoint			Operational Alarm Setpoint		

RI = 300 is withdrawal limit at all power levels.

Oconee 2 Cycle 22
Rod Index Setpoints
3 Pump Operation, No Inoperable Rods, BOC to EOC

ONEI-0400-51 Rev 25
Page 19 of 33

% FP	Shutdown Margin Setpoint			Operational Alarm Setpoint		
	CRGP 5	CRGP 6	CRGP 7	CRGP 5	CRGP 6	CRGP 7
77	100	100	27.4	100	100	46.5
76.2	100	100	25.0	100	100	45.2
76	100	99.7	24.7	100	100	44.9
75	100	98.2	23.2	100	100	43.2
74	100	96.8	21.8	100	100	41.5
73	100	95.3	20.3	100	100	39.9
72	100	93.8	18.8	100	100	38.2
71	100	92.3	17.3	100	100	36.5
70	100	90.8	15.8	100	100	34.9
69	100	89.4	14.4	100	100	33.2
68	100	87.9	12.9	100	100	31.5
67	100	86.4	11.4	100	100	29.9
66	100	84.9	9.9	100	100	28.2
65	100	83.4	8.4	100	100	26.5
64.1	100	82.1	7.1	100	100	25.0
63	100	80.5	5.5	100	99	24.1
62	100	79.0	4.0	100	98	23.3
61	100	77.5	2.5	100	97	22.4
60	100	76.0	1.0	100	96.6	21.6
59.3	100	75.0	0.0	100	96.0	21.0
59	100	74.1	0	100	95.8	20.8
58	100	71.1	0	100	94.9	19.9
57	100	68.2	0	100	94.1	19.1
56	100	65.2	0	100	93.3	18.3
55	100	62.2	0	100	92.4	17.4
54	100	59.3	0	100	91.6	16.6
53	100	56.3	0	100	90.8	15.8
52	100	53.4	0	100	89.9	14.9
51	100	50.4	0	100	89.1	14.1
50	100	47.4	0	100	88.2	13.2
49	100	44.5	0	100	86.7	11.7
48	100	41.5	0	100	85.1	10.1
47	100	39.6	0	100	83.5	8.5
46	100	37.8	0	100	82.0	7.0
45	100	35.9	0	100	80.4	5.4
44	100	34.1	0	100	78.8	3.8
43	100	32.2	0	100	77.2	2.2
42	100	30.4	0	100	75.7	0.7
41.6	100	29.6	0	100	75.0	0.0
41	100	28.5	0	100	73.2	0
40	100	26.6	0	100	70.1	0
39.1	100	25.0	0	100	67.3	0
39	99.9	24.9	0	100	66.9	0
38	99	24.0	0	100	63.8	0
37	98	23.0	0	100	60.6	0
36	97.1	22.1	0	100	57.5	0
35	96.2	21.2	0	100	54.3	0
34	95.2	20.2	0	100	51.2	0
33	94.3	19.3	0	100	48.1	0
32	93.4	18.4	0	100	44.9	0
31	92.5	17.5	0	100	41.8	0
30	91.5	16.5	0	100	38.6	0
29	90.6	15.6	0	100	35.5	0
28	89.7	14.7	0	100	32.4	0
27	88.8	13.8	0	100	29.2	0
% FP	CRGP 5	CRGP 6	CRGP 7	CRGP 5	CRGP 6	CRGP 7
	Shutdown Margin Setpoint			Operational Alarm Setpoint		

RI = 300 is withdrawal limit at all power levels.

Continued on next page.

ONEI-0400-51 Rev 25
Page 20 of 33

RI = 300 is withdrawal limit at all power levels.

Oconee 2 Cycle 22
Rod Index Setpoints
4 Pump Operation, 1 Inoperable Rod, BOC to EOC

ONEI-0400-51 Rev 25
Page 21 of 33

% FP	Shutdown Margin Setpoint			Operational Alarm Setpoint		
	CRGP 5	CRGP 6	CRGP 7	CRGP 5	CRGP 6	CRGP 7
102	100	100	83.4	100	100	83.4
101	100	100	82.5	100	100	82.5
100	100	100	81.5	100	100	81.5
99	100	100	80.5	100	100	80.5
98	100	100	79.6	100	100	79.6
97	100	100	78.6	100	100	78.6
96	100	100	77.7	100	100	77.7
95	100	100	76.7	100	100	76.7
94	100	100	75.7	100	100	75.7
93	100	100	74.8	100	100	74.8
92	100	100	73.8	100	100	73.8
91	100	100	72.8	100	100	72.9
90	100	100	71.9	100	100	71.9
89	100	100	70.9	100	100	70.9
88	100	100	70.0	100	100	70.0
87	100	100	69.0	100	100	69.0
86	100	100	68.0	100	100	68.1
85	100	100	67.1	100	100	67.1
84	100	100	66.1	100	100	66.1
83	100	100	65.2	100	100	65.2
82	100	100	64.2	100	100	64.2
81	100	100	63.2	100	100	63.3
80	100	100	62.3	100	100	62.3
79	100	100	61.3	100	100	61.3
78	100	100	60.3	100	100	60.4
77	100	100	59.4	100	100	59.4
76	100	100	58.4	100	100	58.4
75	100	100	57.5	100	100	57.5
74	100	100	56.5	100	100	56.5
73	100	100	55.5	100	100	55.6
72	100	100	54.6	100	100	54.6
71	100	100	53.6	100	100	53.6
70	100	100	52.7	100	100	52.7
69	100	100	51.7	100	100	51.7
68	100	100	50.7	100	100	50.7
67	100	100	49.8	100	100	49.8
66	100	100	48.8	100	100	48.8
65	100	100	47.8	100	100	47.8
64	100	100	46.9	100	100	46.9
63	100	100	45.9	100	100	45.9
62	100	100	45.0	100	100	45.0
61	100	100	44.0	100	100	44.0
60	100	100	43.0	100	100	43.0
59	100	100	42.1	100	100	42.1
58	100	100	41.1	100	100	41.1
57	100	100	40.2	100	100	40.2
56	100	100	39.2	100	100	39.2
55	100	100	38.2	100	100	38.2
54	100	100	37.3	100	100	37.3
53	100	100	36.3	100	100	36.3
52	100	100	35.3	100	100	35.3
51	100	100	34.4	100	100	34.4
50	100	100	33.4	100	100	33.4
49	100	100	32.5	100	100	32.5
48	100	100	31.5	100	100	31.5
% FP	CRGP 5	CRGP 6	CRGP 7	CRGP 5	CRGP 6	CRGP 7
	Shutdown Margin Setpoint			Operational Alarm Setpoint		

RI = 300 is withdrawal limit at all power levels.

Continued on next page.

Oconee 2 Cycle 22
Rod Index Setpoints
4 Pump Operation, 1 Inoperable Rod, BOC to EOC

ONEI-0400-51 Rev 25
Page 22 of 33

% FP	Shutdown Margin Setpoint			Operational Alarm Setpoint		
	CRGP 5	CRGP 6	CRGP 7	CRGP 5	CRGP 6	CRGP 7
47	100	100	29.5	100	100	29.5
46	100	100	27.5	100	100	27.5
45	100	100	25.5	100	100	25.5
44.8	100	100	25.0	100	100	25.0
44	100	99.2	24.2	100	99.2	24.2
43	100	98.2	23.2	100	98.2	23.2
42	100	97.2	22.2	100	97.2	22.2
41	100	96.2	21.2	100	96.2	21.2
40	100	95.2	20.2	100	95.2	20.2
39	100	94.2	19.2	100	94.2	19.2
38	100	93.2	18.2	100	93.2	18.2
37	100	92.2	17.2	100	92.2	17.2
36	100	91.2	16.2	100	91.2	16.2
35	100	90.2	15.2	100	90.2	15.2
34	100	89.2	14.2	100	89.2	14.2
33	100	88.2	13.2	100	88.2	13.2
32	100	87.2	12.2	100	87.2	12.2
31	100	86.2	11.2	100	86.2	11.2
30	100	85.2	10.2	100	85.2	10.2
29	100	84.2	9.2	100	84.2	9.2
28	100	83.2	8.2	100	83.2	8.2
27	100	82.2	7.2	100	82.2	7.2
26	100	81.2	6.2	100	81.2	6.2
25	100	80.2	5.2	100	80.2	5.2
24	100	79.2	4.2	100	79.2	4.2
23	100	78.2	3.2	100	78.2	3.2
22	100	77.2	2.2	100	77.2	2.2
21	100	76.2	1.2	100	76.2	1.2
20	100	75.2	0.2	100	75.2	0.2
19.8	100	75.0	0	100	75.0	0
19	100	73.5	0	100	73.5	0
18	100	71.5	0	100	71.5	0
17	100	69.5	0	100	69.5	0
16	100	67.5	0	100	67.5	0
15	100	65.5	0	100	65.5	0
14	100	63.5	0	100	63.5	0
13	100	61.5	0	100	61.5	0
12	100	53.0	0	100	53.0	0
11	100	44.5	0	100	44.5	0
10	100	36.0	0	100	36.0	0
9	100	27.5	0	100	27.5	0
8.7	100	25.0	0	100	25.0	0
8	97.0	22.0	0	97.0	22.0	0
7	92.8	17.8	0	92.8	17.8	0
6	88.5	13.5	0	88.5	13.5	0
5	84.2	9.2	0	84.2	9.2	0
4	80.0	5.0	0	80.0	5.0	0
3	75.8	0.8	0	75.8	0.8	0
2.8	75	0	0	75	0	0
2	68	0	0	68	0	0
1	59.5	0	0	59.5	0	0
0	51	0	0	51	0	0
% FP	CRGP 5	CRGP 6	CRGP 7	CRGP 5	CRGP 6	CRGP 7
	Shutdown Margin Setpoint			Operational Alarm Setpoint		

RI = 300 is withdrawal limit at all power levels.

Oconee 2 Cycle 22
Rod Index Setpoints
3 Pump Operation, 1 Inoperable Rod, BOC to EOC

ONEI-0400-51 Rev 25

Page 23 of 33


% FP	Shutdown Margin Setpoint			Operational Alarm Setpoint		
	CRGP 5	CRGP 6	CRGP 7	CRGP 5	CRGP 6	CRGP 7
77	100	100	85.2	100	100	85.2
76	100	100	83.4	100	100	83.4
75	100	100	81.5	100	100	81.5
74	100	100	79.6	100	100	79.6
73	100	100	77.8	100	100	77.8
72	100	100	75.9	100	100	75.9
71	100	100	74.1	100	100	74.1
70	100	100	72.2	100	100	72.2
69	100	100	70.4	100	100	70.4
68	100	100	68.5	100	100	68.5
67	100	100	66.7	100	100	66.7
66	100	100	64.8	100	100	64.8
65	100	100	63.0	100	100	63.0
64	100	100	61.1	100	100	61.1
63	100	100	59.3	100	100	59.3
62	100	100	57.4	100	100	57.4
61	100	100	55.6	100	100	55.6
60	100	100	53.7	100	100	53.7
59	100	100	51.9	100	100	51.9
58	100	100	50.0	100	100	50.0
57	100	100	48.2	100	100	48.2
56	100	100	46.3	100	100	46.3
55	100	100	44.5	100	100	44.5
54	100	100	42.6	100	100	42.6
53	100	100	40.8	100	100	40.8
52	100	100	38.9	100	100	38.9
51	100	100	37.1	100	100	37.1
50	100	100	35.2	100	100	35.2
49	100	100	33.4	100	100	33.4
48	100	100	31.5	100	100	31.5
47	100	100	29.5	100	100	29.5
46	100	100	27.5	100	100	27.5
45	100	100	25.5	100	100	25.5
44.8	100	100	25.0	100	100	25.0
44	100	99.2	24.2	100	99.2	24.2
43	100	98.2	23.2	100	98.2	23.2
42	100	97.2	22.2	100	97.2	22.2
41	100	96.2	21.2	100	96.2	21.2
40	100	95.2	20.2	100	95.2	20.2
39	100	94.2	19.2	100	94.2	19.2
38	100	93.2	18.2	100	93.2	18.2
37	100	92.2	17.2	100	92.2	17.2
36	100	91.2	16.2	100	91.2	16.2
35	100	90.2	15.2	100	90.2	15.2
34	100	89.2	14.2	100	89.2	14.2
33	100	88.2	13.2	100	88.2	13.2
32	100	87.2	12.2	100	87.2	12.2
31	100	86.2	11.2	100	86.2	11.2
30	100	85.2	10.2	100	85.2	10.2
29	100	84.2	9.2	100	84.2	9.2
28	100	83.2	8.2	100	83.2	8.2
27	100	82.2	7.2	100	82.2	7.2
26	100	81.2	6.2	100	81.2	6.2
25	100	80.2	5.2	100	80.2	5.2
24	100	79.2	4.2	100	79.2	4.2
% FP	CRGP 5	CRGP 6	CRGP 7	CRGP 5	CRGP 6	CRGP 7
	Shutdown Margin Setpoint			Operational Alarm Setpoint		


RI = 300 is withdrawal limit at all power levels.


Continued on next page.


ONEI-0400-51 Rev 25
Page 24 of 33

RI = 300 is withdrawal limit at all power levels.

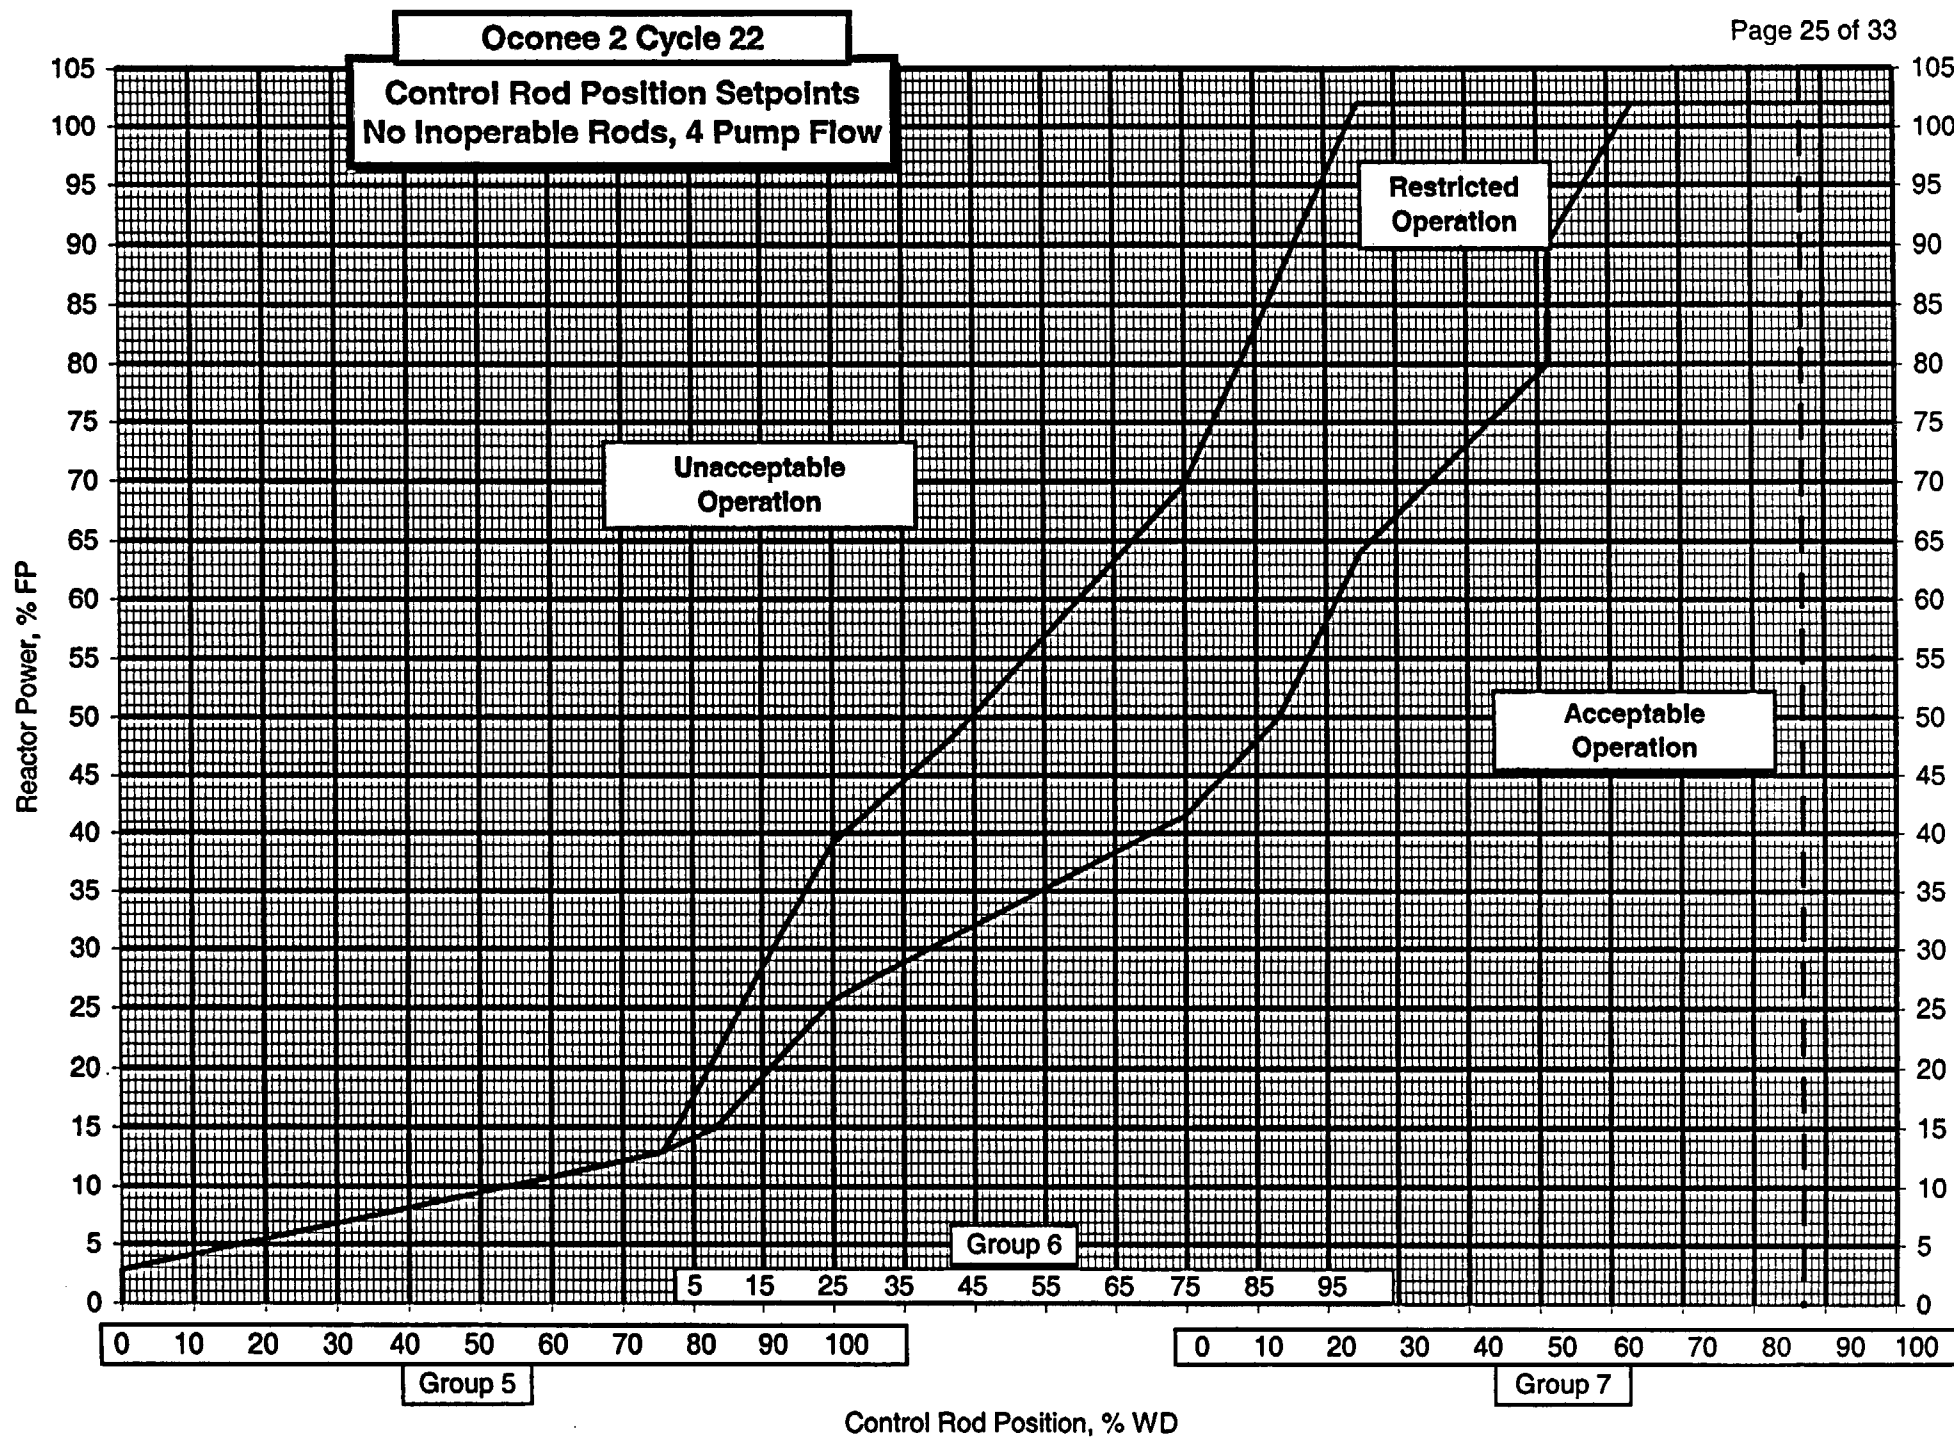

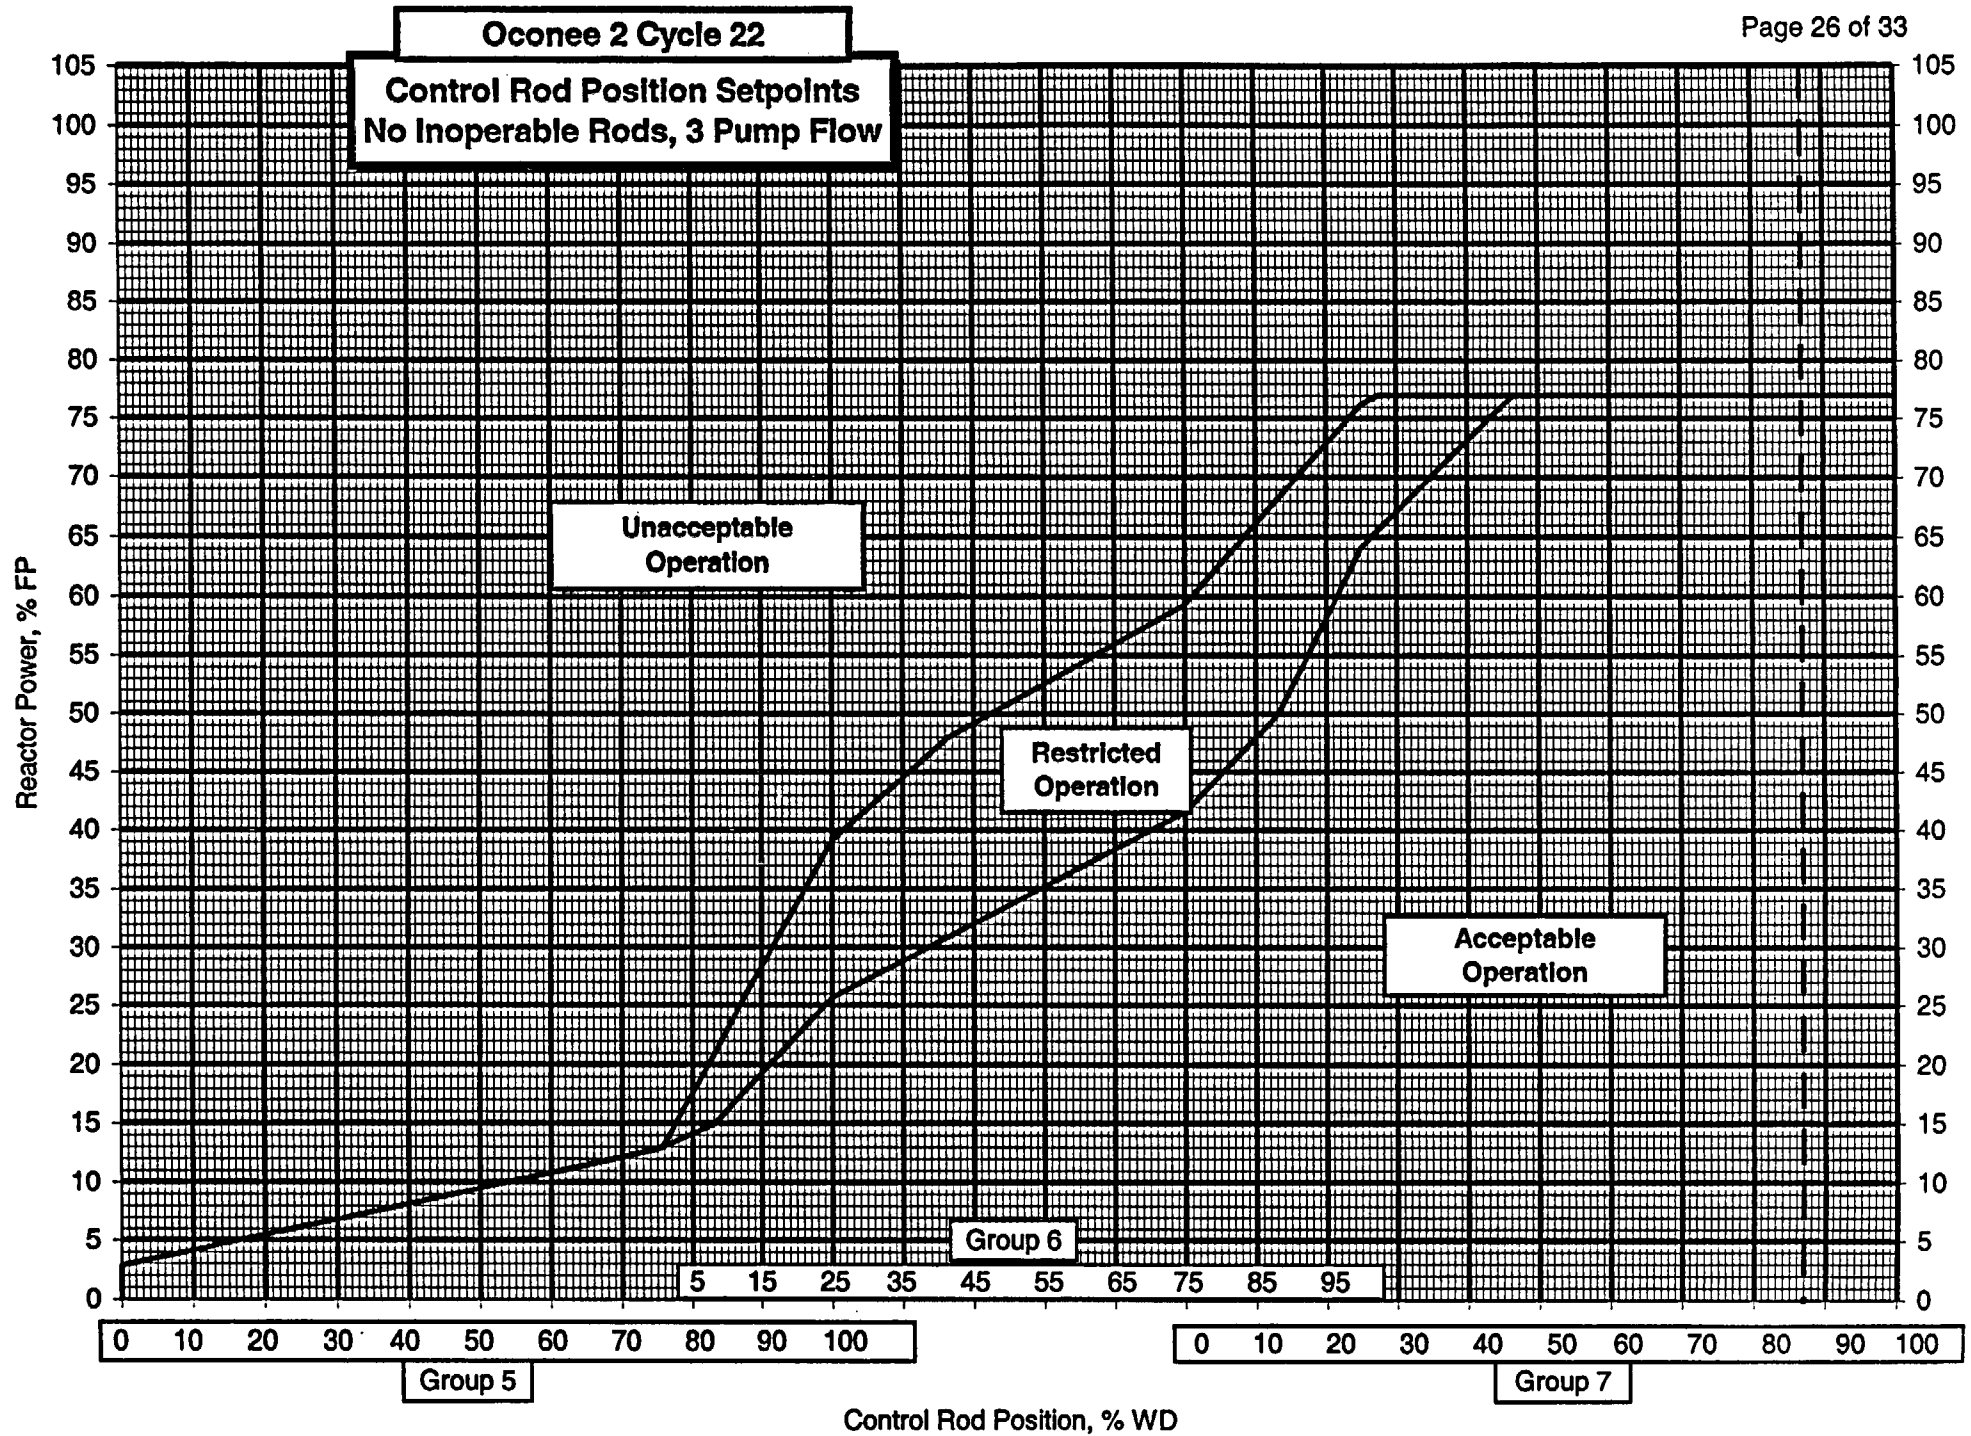

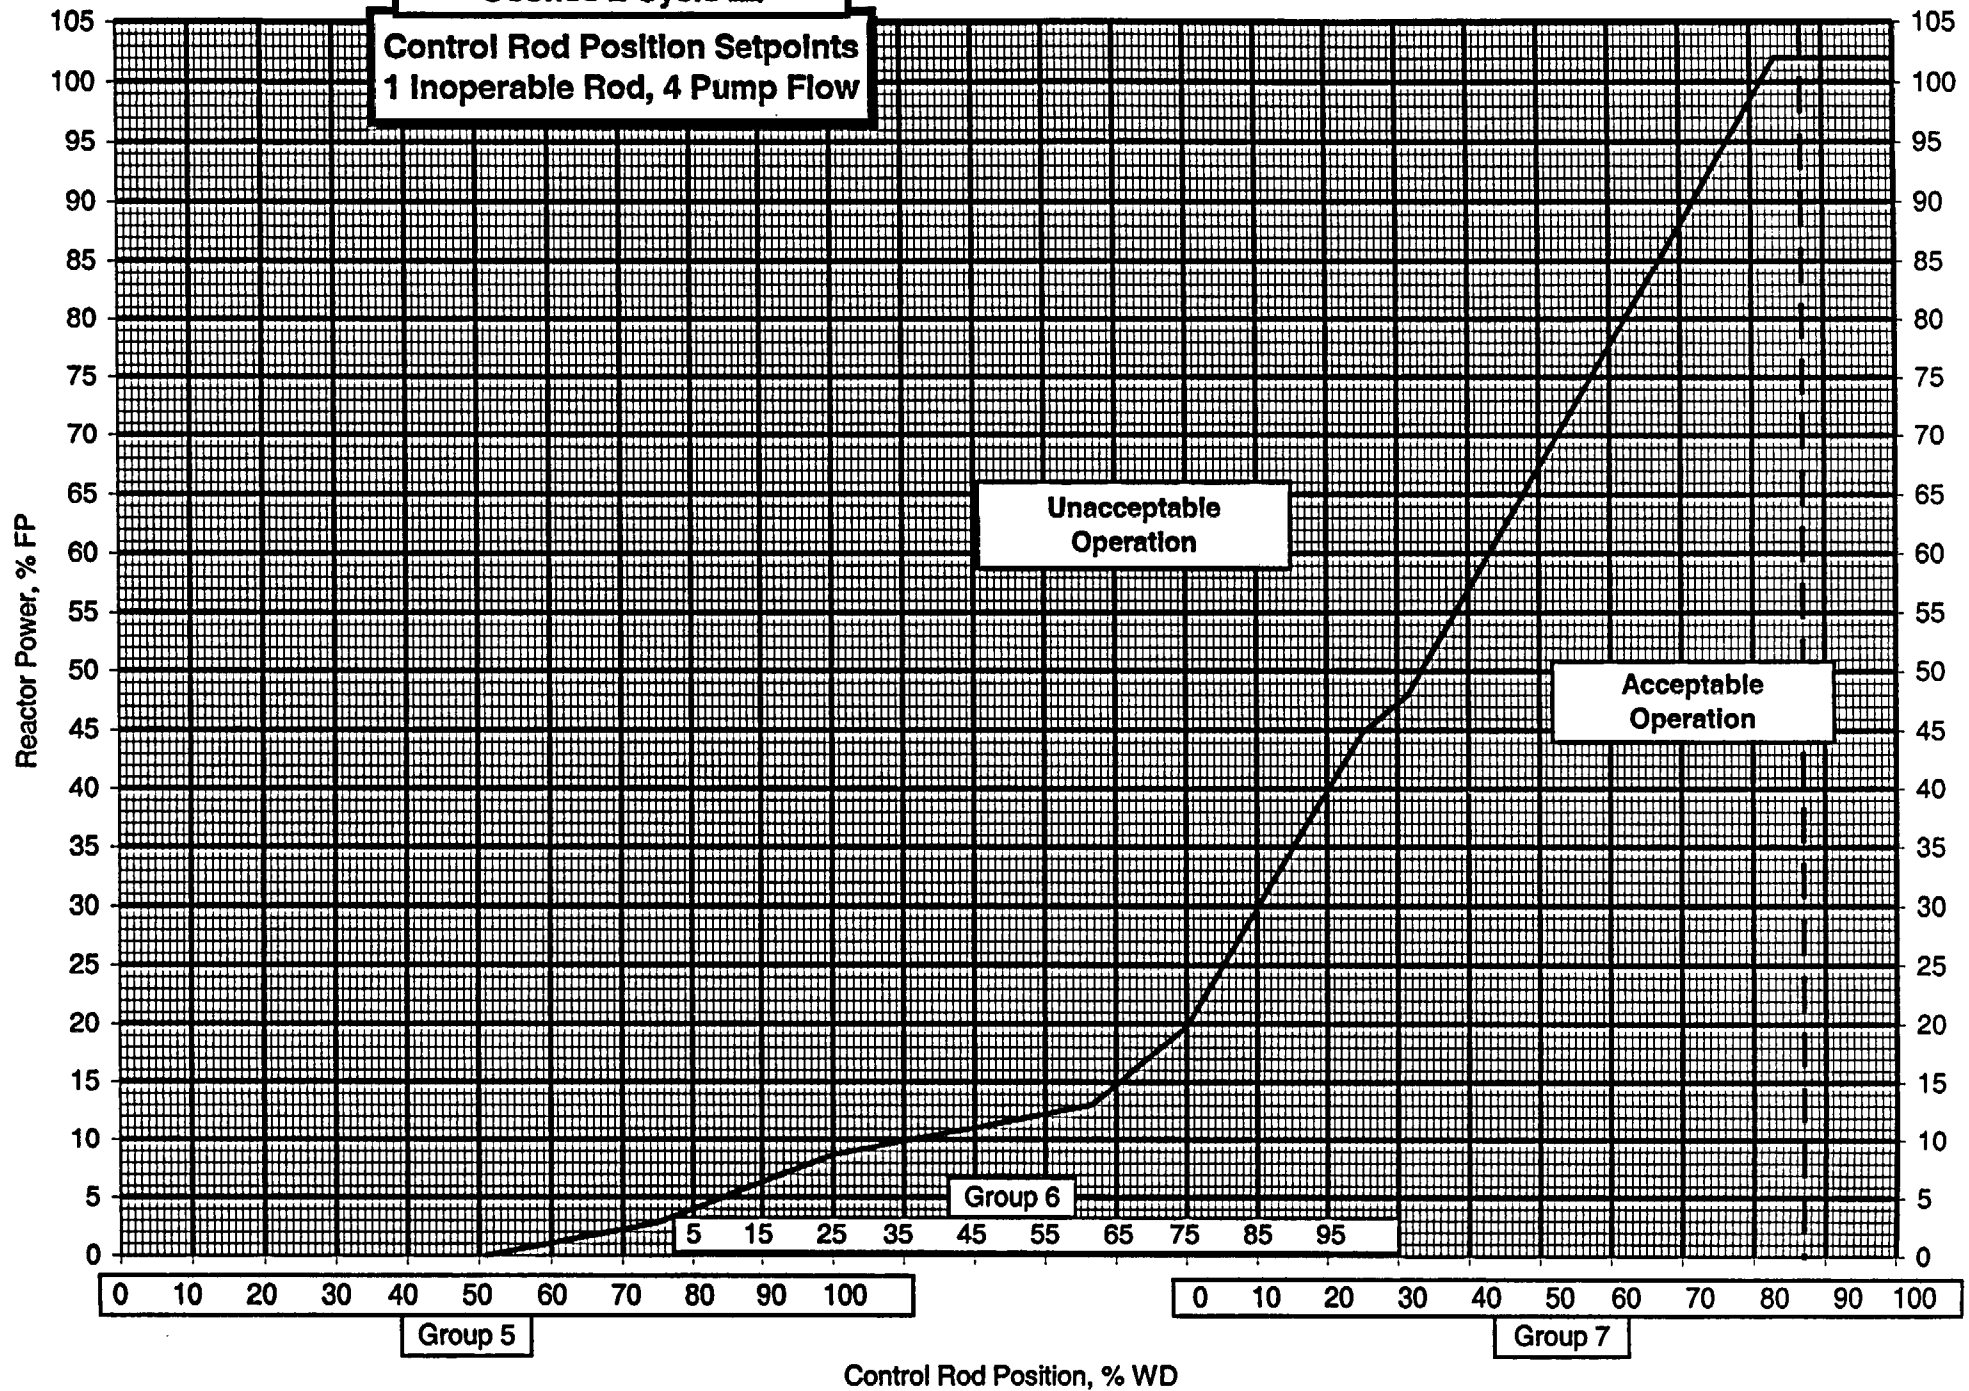Oconee 2 Cycle 22**Control Rod Position Setpoints
1 Inoperable Rod, 4 Pump Flow**

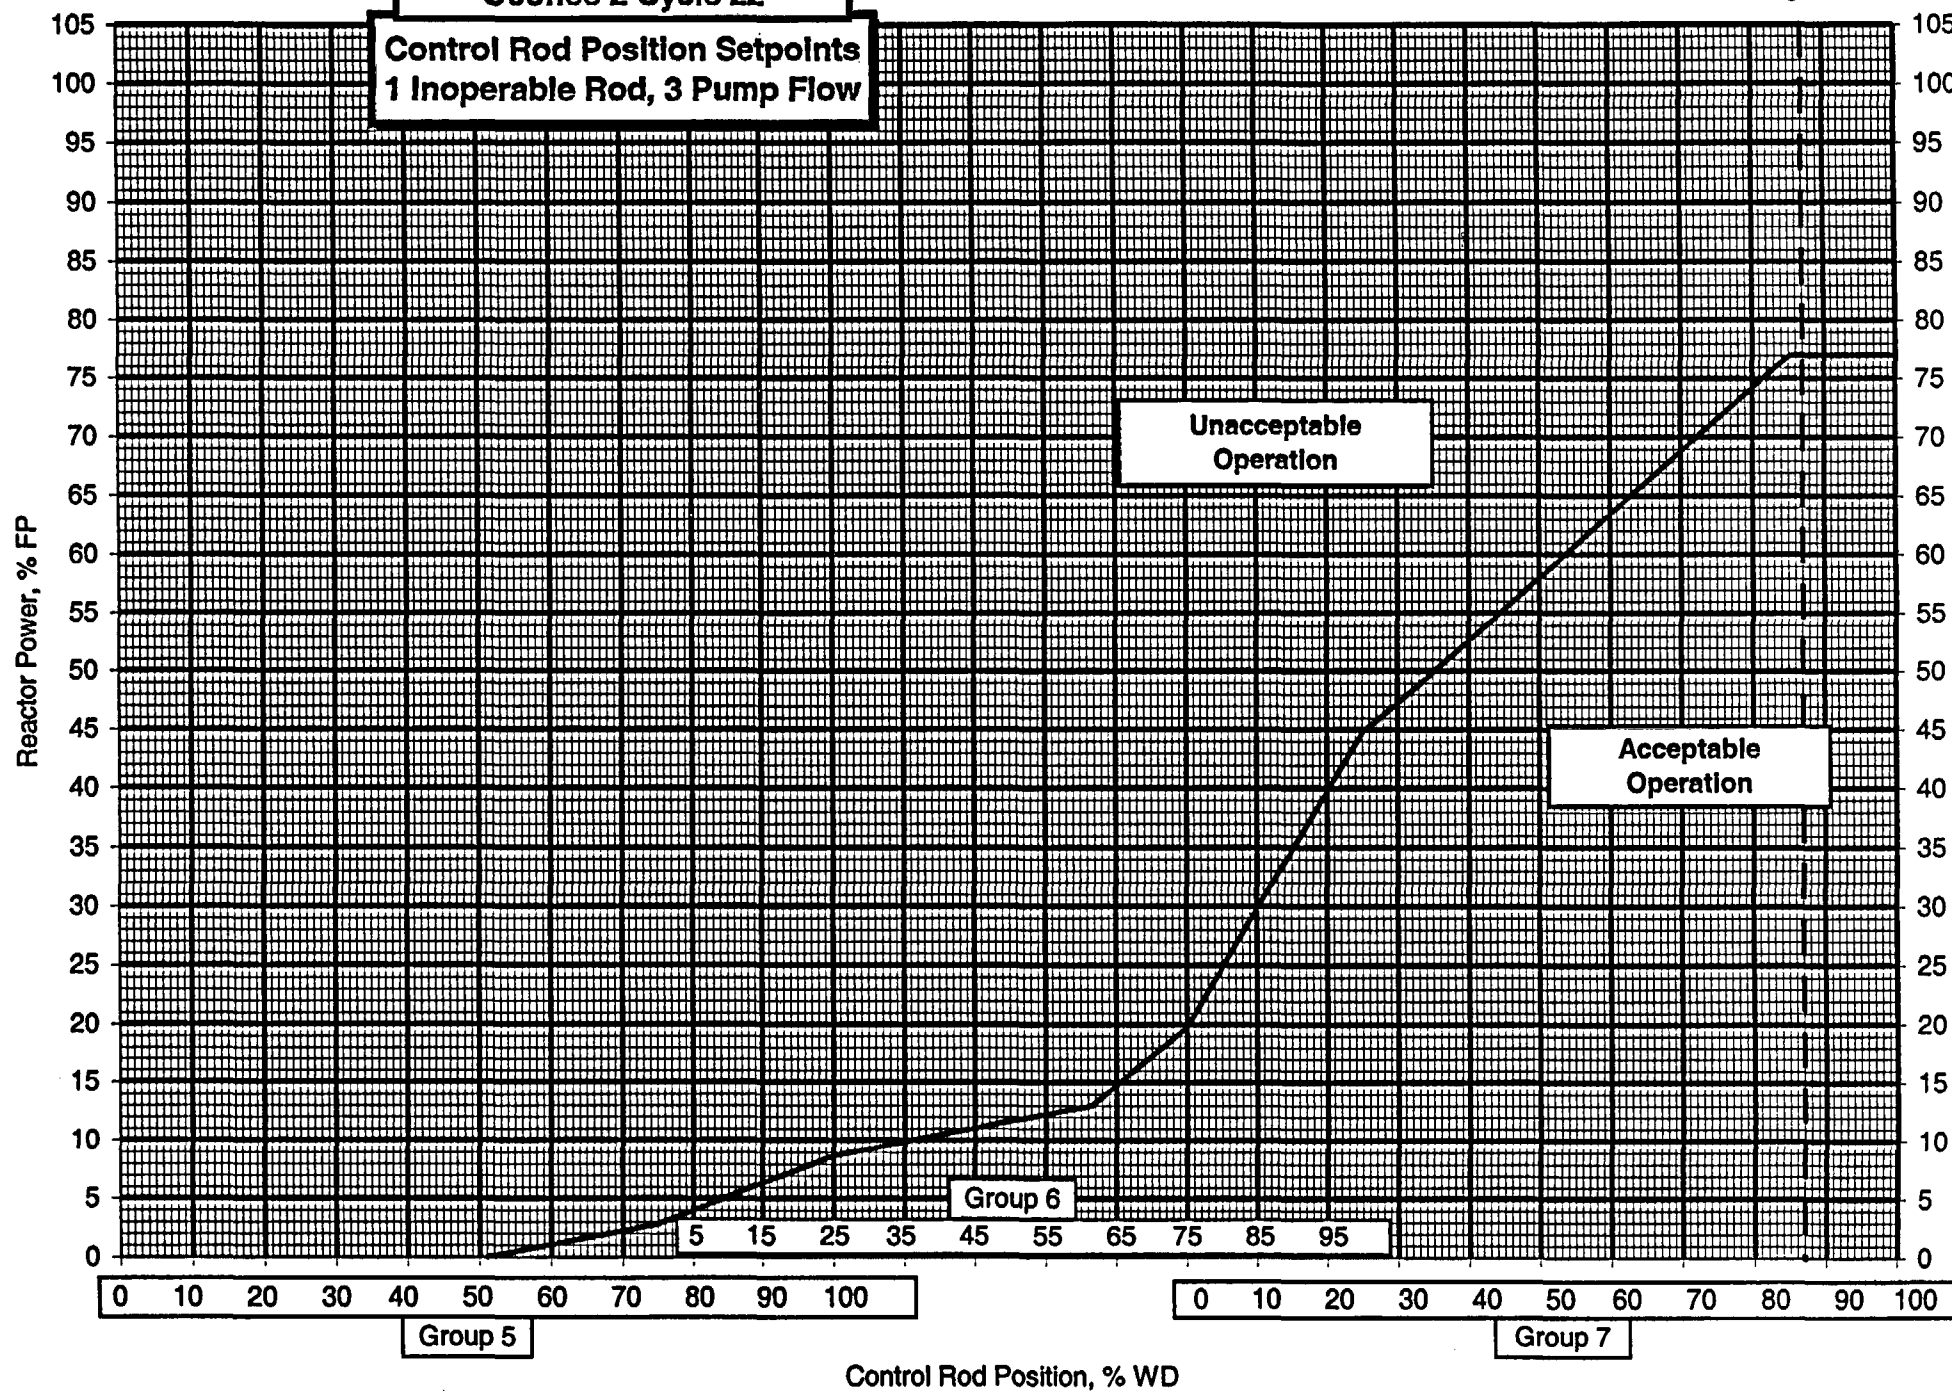Oconee 2 Cycle 22**Control Rod Position Setpoints
1 Inoperable Rod, 3 Pump Flow**

Oconee 2 Cycle 22

2.0 Core Operating Limits -- Not Error Adjusted

The data provided on the following pages satisfies a licensing commitment to identify specific parameters before instrumentation uncertainties are incorporated.

References provided in section 1 of this COLR identify the sources for the data which follows.

Information provided in this section should not be used in plant procedures.

Quadrant Power Tilt Limits

Referred to by TS 3.2.3

	Steady State		Transient		Maximum
Core Power Level, %FP	30 - 100	0 - 30	30 - 100	0 - 30	0 - 100
Quadrant Power Tilt, %	5.40	10.00	9.44	12.00	20.00

Variable Low RCS Pressure Protective Limits

Referred to by TS 2.1.1

Core Outlet Pressure psia	Reactor Coolant Outlet Temperature, °F	
	3 RCS Pumps	4 RCS Pumps
1800	581.0	578.3
1900	590.0	587.3
2000	598.9	596.3
2100	607.9	605.2
2200	616.9	614.2
2300	625.9	623.2

Oconee 2 Cycle 22

Axial Power Imbalance Protective Limits

Referred to by TS 2.1.1

Not for Plant Use

	%FP	RPS	Operational
4 Pumps	0	-35.0	-43.8
	80	-	-43.8
	90	-35.0	-39.2
	100	-	-30.0
	109.4	-14.4	-
	109.4	14.4	-
	100	-	30.0
	90	35.0	39.9
	80	-	39.2
	0	35.0	39.2
3 Pumps	0	-35.0	-43.8
	62.3	-35.0	-
	77.0	-	-43.8
	81.7	-14.4	-
	81.7	14.4	-
	77.0	-	39.2
	62.3	35.0	-
	0	35.0	39.2

Oconee 2 Cycle 22

Rod Index Limits

Referred to by TS 3.2.1

Not for Plant Use

	%FP	Operational RI Insertion Limit	Shutdown Margin RI No Inop Rod	Insertion Limit 1 Inop Rod	RI Withdrawal Limit
4 Pumps	102	262	220	280	300
	100	260	-	-	300
	90	250	-	-	300
	80	250	-	-	300
	50	200	140	230	300
	15	90	75	160	300
	5	0	0	75	300
3 Pumps	77	245	220	280	300
	50	200	140	230	300
	15	90	75	160	300
	5	0	0	75	300

Oconee 2 Cycle 22

LOCA Limits

Not for Plant Use

Core Elevation Feet		LOCA LHR kw/ft Limit Versus Burnup		
Mk-B11 Fuel		0 GWd/mtU	40 GWd/mtU	62 GWd/mtU
	0.000	16.6	16.6	12.2
	2.506	17.5	17.5	12.2
	4.264	17.6	17.6	12.2
	6.021	17.7	17.7	12.2
	7.779	17.6	17.6	12.2
	9.536	17.5	17.5	12.2
	12.00	16.6	16.6	12.2
Mk-B10 Fuel		0 GWd/mtU	30 GWd/mtU	62 GWd/mtU
	0.000	15.6	15.6	11.6
	2.506	16.5	16.5	11.6
	4.264	16.8	16.8	11.6
	6.021	17.0	17.0	11.6
	7.779	17.0	17.0	11.6
	9.536	16.7	16.7	11.6
	12.00	15.8	15.8	11.6

Oconee 2 Cycle 22

Not for Plant Use
Instrument uncertainties are not included in the values shown

ΔT_{cold} , °F	4 RCP Operation - Loop Average Temp., °F	3 RCP Operation - Loop Average Temp., °F
	Tavg (Analytical)	Tavg (Analytical)
0.0	581.0	581.0
0.1	581.0	581.0
0.2	581.1	581.0
0.3	581.1	581.1
0.4	581.2	581.1
0.5	581.2	581.1
0.6	581.2	581.1
0.7	581.3	581.2
0.8	581.3	581.2
0.9	581.3	581.2
1.0	581.4	581.2
1.1	581.4	581.2
1.2	581.5	581.3
1.3	581.5	581.3
1.4	581.5	581.3
1.5	581.6	581.3
1.6	581.6	581.4
1.7	581.6	581.4
1.8	581.7	581.4
1.9	581.7	581.4
2.0	581.8	581.4
2.1	581.8	581.5
2.2	581.8	581.5
2.3	581.9	581.5
2.4	581.9	581.5
2.5	582.0	581.6
2.6	582.0	581.6
2.7	582.0	581.6
2.8	582.1	581.6
2.9	582.1	581.6
3.0	582.1	581.7
3.1	582.2	581.7
3.2	582.2	581.7
3.3	582.3	581.7
3.4	582.3	581.7
3.5	582.3	581.8
3.6	582.4	581.8
3.7	582.4	581.8
3.8	582.4	581.8
3.9	582.5	581.9
4.0	582.5	581.9
4.1	582.6	581.9
4.2	582.6	581.9
4.3	582.6	581.9
4.4	582.7	582.0
4.5	582.7	582.0
4.6	582.7	582.0
4.7	582.8	582.0
4.8	582.8	582.1
4.9	582.9	582.1
5.0	582.9	582.1