



South Texas Project Electric Generating Station P.O. Box 289 Wadsworth, Texas 77483

November 3, 2005
NOC-AE-05001946
10CFR50.36


U. S. Nuclear Regulatory Commission
Attention: Document Control Desk
One White Flint North
11555 Rockville Pike
Rockville, MD 20852

South Texas Project
Unit 2
Docket No. STN 50-499
Unit 2 Cycle 12 Core Operating Limits Report

In accordance with Technical Specification 6.9.1.6.d, the attached Core Operating Limits Report is submitted for Unit 2 Cycle 12. This report reflects core design changes made during the 2RE11 refueling outage.

There are no commitments in this letter.

If there are any questions concerning this report, please contact Joe Loya at (361) 972-7922 or me at (361) 972-7795.

for 
David A. Leazar
Director,
Nuclear Fuel & Analysis

jal

Attachment: Unit 2 Cycle 12 Core Operating Limits Report, Rev. 0.

A501

STI: 31951676

cc:
(paper copy)

Bruce S. Mallett
Regional Administrator, Region IV
U. S. Nuclear Regulatory Commission
611 Ryan Plaza Drive, Suite 400
Arlington, Texas 76011-8064

Richard A. Ratliff
Bureau of Radiation Control
Texas Department of State Health Services
1100 West 49th Street
Austin, TX 78756-3189

Jeffrey Cruz
U. S. Nuclear Regulatory Commission
P. O. Box 289, Mail Code: MN116
Wadsworth, TX 77483

C. M. Canady
City of Austin
Electric Utility Department
721 Barton Springs Road
Austin, TX 78704

(electronic copy)

A. H. Gutterman, Esquire
Morgan, Lewis & Bockius LLP

Mohan C. Thadani
U. S. Nuclear Regulatory Commission

Jack A. Fusco
Michael A. Reed
Texas Genco, LP

C. Kirksey
City of Austin

Jon C. Wood
Cox Smith Matthews

J. J. Nesrsta
R. K. Temple
E. Alarcon
City Public Service

31948DL61



SOUTH TEXAS PROJECT

Unit 2 Cycle 12

CORE OPERATING LIMITS REPORT

Revision 0

1.0 CORE OPERATING LIMITS REPORT

This Core Operating Limits Report for STPEGS Unit 2 Cycle 12 has been prepared in accordance with the requirements of Technical Specification 6.9.1.6. The core operating limits have been developed using the NRC-approved methodologies specified in Technical Specification 6.9.1.6.

The Technical Specifications affected by this report are:

- 1) 2.1 SAFETY LIMITS
- 2) 2.2 LIMITING SAFETY SYSTEM SETTINGS
- 3) 3/4.1.1.1 SHUTDOWN MARGIN
- 4) 3/4.1.1.3 MODERATOR TEMPERATURE COEFFICIENT LIMITS
- 5) 3/4.1.3.5 SHUTDOWN ROD INSERTION LIMITS
- 6) 3/4.1.3.6 CONTROL ROD INSERTION LIMITS
- 7) 3/4.2.1 AFD LIMITS
- 8) 3/4.2.2 HEAT FLUX HOT CHANNEL FACTOR
- 9) 3/4.2.3 NUCLEAR ENTHALPY RISE HOT CHANNEL FACTOR
- 10) 3/4.2.5 DNB PARAMETERS

2.0 OPERATING LIMITS

The cycle-specific parameter limits for the specifications listed in Section 1.0 are presented below.

2.1 SAFETY LIMITS (Specification 2.1):

- 2.1.1 The combination of THERMAL POWER, pressurizer pressure, and the highest operating loop coolant temperature (T_{avg}) shall not exceed the limits shown in Figure 1.

2.2 LIMITING SAFETY SYSTEM SETTINGS (Specification 2.2):

- 2.2.1 The Loop design flow for Reactor Coolant Flow-Low is 98,000 gpm.

2.2.2 The Over-temperature ΔT and Over-power ΔT setpoint parameter values are listed below:

Over-temperature ΔT Setpoint Parameter Values

- τ_1 measured reactor vessel ΔT lead/lag time constant, $\tau_1 = 8$ sec
- τ_2 measured reactor vessel ΔT lead/lag time constant, $\tau_2 = 3$ sec
- τ_3 measured reactor vessel ΔT lag time constant, $\tau_3 = 2$ sec
- τ_4 measured reactor vessel average temperature lead/lag time constant, $\tau_4 = 28$ sec
- τ_5 measured reactor vessel average temperature lead/lag time constant, $\tau_5 = 4$ sec
- τ_6 measured reactor vessel average temperature lag time constant, $\tau_6 = 2$ sec
- K_1 Overtemperature ΔT reactor trip setpoint, $K_1 = 1.14$
- K_2 Overtemperature ΔT reactor trip setpoint T_{avg} coefficient, $K_2 = 0.028/^\circ F$
- K_3 Overtemperature ΔT reactor trip setpoint pressure coefficient, $K_3 = 0.00143/\text{psig}$
- T' Nominal full power T_{avg} , $T' \leq 592.0$ $^\circ F$
- P' Nominal RCS pressure, $P' = 2235$ psig
- $f_1(\Delta I)$ is a function of the indicated difference between top and bottom detectors of the power-range neutron ion chambers; with gains to be selected based on measured instrument response during plant startup tests such that:
 - (1) For $q_t - q_b$ between -70% and $+8\%$, $f_1(\Delta I) = 0$, where q_t and q_b are percent RATED THERMAL POWER in the top and bottom halves of the core respectively, and $q_t + q_b$ is total THERMAL POWER in percent of RATED THERMAL POWER;
 - (2) For each percent that the magnitude of $q_t - q_b$ exceeds -70% , the ΔT Trip Setpoint shall be automatically reduced by 0.0% of its value at RATED THERMAL POWER; and
 - (3) For each percent that the magnitude of $q_t - q_b$ exceeds $+8\%$, the ΔT Trip Setpoint shall be automatically reduced by 2.65% of its value at RATED THERMAL POWER.

Over-power ΔT Setpoint Parameter Values

- τ_1 measured reactor vessel ΔT lead/lag time constant, $\tau_1 = 8$ sec
- τ_2 measured reactor vessel ΔT lead/lag time constant, $\tau_2 = 3$ sec
- τ_3 measured reactor vessel ΔT lag time constant, $\tau_3 = 2$ sec
- τ_6 measured reactor vessel average temperature lag time constant, $\tau_6 = 2$ sec
- τ_7 Time constant utilized in the rate-lag compensator for T_{avg} , $\tau_7 = 10$ sec
- K_4 Overpower ΔT reactor trip setpoint, $K_4 = 1.08$
- K_5 Overpower ΔT reactor trip setpoint T_{avg} rate/lag coefficient, $K_5 = 0.02/^\circ F$ for increasing average temperature, and $K_5 = 0$ for decreasing average temperature
- K_6 Overpower ΔT reactor trip setpoint T_{avg} heatup coefficient $K_6 = 0.002/^\circ F$ for $T > T'$, and $K_6 = 0$ for $T \leq T'$
- T'' Indicated full power T_{avg} , $T'' \leq 592.0$ $^\circ F$
- $f_2(\Delta I) = 0$ for all (ΔI)

2.3 SHUTDOWN MARGIN (Specification 3.1.1.1):

The SHUTDOWN MARGIN shall be:

- 2.3.1 Greater than 1.3% Δp for MODES 1 and 2*
*See Special Test Exception 3.10.1
- 2.3.2 Greater than the limits in Figure 2 for MODES 3 and 4.
- 2.3.3 Greater than the limits in Figure 3 for MODE 5.

2.4 MODERATOR TEMPERATURE COEFFICIENT (Specification 3.1.1.3):

- 2.4.1 The BOL, ARO, MTC shall be less positive than the limits shown in Figure 4.
- 2.4.2 The EOL, ARO, HFP, MTC shall be less negative than -62.6 pcm/ $^{\circ}\text{F}$.
- 2.4.3 The 300 ppm, ARO, HFP, MTC shall be less negative than -53.6 pcm/ $^{\circ}\text{F}$ (300 ppm Surveillance Limit).
Where: BOL stands for Beginning-of-Cycle Life,
EOL stands for End-of-Cycle Life,
ARO stands for All Rods Out,
HFP stands for Hot Full Power (100% RATED THERMAL POWER),
HFP vessel average temperature is 592 $^{\circ}\text{F}$.

- 2.4.4 The Revised Predicted near-EOL 300 ppm MTC shall be calculated using the algorithm from T.S. 6.9.1.6.b.10:

$$\text{Revised Predicted MTC} = \text{Predicted MTC} + \text{AFD Correction} - 3 \text{ pcm}/^{\circ}\text{F}$$

If the Revised Predicted MTC is less negative than the S.R. 4.1.1.3b limit and all of the benchmark data contained in the surveillance procedure are met, then an MTC measurement in accordance with S.R. 4.1.1.3b is not required.

2.5 ROD INSERTION LIMITS (Specification 3.1.3.5 and 3.1.3.6):

- 2.5.1 All banks shall have the same Full Out Position (FOP) of either 255 steps withdrawn or 259 steps withdrawn.
- 2.5.2 The Control Banks shall be limited in physical insertion as specified in Figure 5.
- 2.5.3 Individual Shutdown bank rods are fully withdrawn when the Bank Demand Indication is at the FOP and the Rod Group Height Limiting Condition for Operation is satisfied (T.S. 3.1.3.1).

2.6 AXIAL FLUX DIFFERENCE (Specification 3.2.1):

- 2.6.1 AFD limits as required by Technical Specification 3.2.1 are determined by CAOC Operations with an AFD target band of +5, -10%.
- 2.6.2 The AFD shall be maintained within the ACCEPTABLE OPERATION portion of Figure 6, as required by Technical Specifications.

2.7 HEAT FLUX HOT CHANNEL FACTOR (Specification 3.2.2):

- 2.7.1 $F_Q^{RTP} = 2.55$.
- 2.7.2 $K(Z)$ is provided in Figure 7.
- 2.7.3 The F_{xy} limits for RATED THERMAL POWER (F_{xy}^{RTP}) within specific core planes shall be:
 - 2.7.3.1 Less than or equal to 2.102 for all cycle burnups for all core planes containing Bank "D" control rods, and
 - 2.7.3.2 Less than or equal to the appropriate core height-dependent value from Table 1 for all unrodded core planes.
 - 2.7.3.3 $PF_{xy} = 0.2$.

These F_{xy} limits were used to confirm that the heat flux hot channel factor $F_Q(Z)$ will be limited by Technical Specification 3.2.2 assuming the most-limiting axial power distributions expected to result for the insertion and removal of Control Banks C and D during operation, including the accompanying variations in the axial xenon and power distributions, as described in WCAP-8385. Therefore, these F_{xy} limits provide assurance that the initial conditions assumed in the LOCA analysis are met, along with the ECCS acceptance criteria of 10 CFR 50.46.

2.8 ENTHALPY RISE HOT CHANNEL FACTOR (Specification 3.2.3):

$$2.8.1 \quad F_{\Delta H}^{RTP} = 1.557^1$$

$$2.8.2 \quad PF_{\Delta H} = 0.3$$

2.9 DNB PARAMETERS (Specification 3.2.5):

2.9.1 The following DNB-related parameters shall be maintained within the following limits:²

2.9.1.1 Reactor Coolant System T_{avg} , ≤ 595 °F³,

2.9.1.2 Pressurizer Pressure, > 2200 psig⁴,

2.9.1.3 Minimum Measured Reactor Coolant System Flow⁵ $> 403,000$ gpm.

3.0 REFERENCES

- 3.1 Letter from D. E. Robinson (Westinghouse) to D. F. Hoppes (STPNOC), "South Texas Project Nuclear Operating Company South Texas Project Electric Generating Station Unit 2 Cycle 12 Final Reload Evaluation (RE) Revision 2," ST-UB-NOC-05002587, Rev. 2, October 21, 2005.
- 3.2 NUREG-1346, Technical Specifications, South Texas Project Unit Nos. 1 and 2.
- 3.3 STPNOC Calculation ZC-7035, Rev. 2, "Loop Uncertainty Calculation for RCS Tavg Instrumentation," Section 10.1.
- 3.4 STPNOC Calculation ZC-7032, Rev. 4, "Loop Uncertainty Calculation for Narrow Range Pressurizer Pressure Monitoring Instrumentation," Section 2.3, Page 9.
- 3.5 Condition Report Engineering Evaluation 04-5927-9, Revision 0, "Reload Safety Evaluation and Core Operating Limits Report for South Texas Unit 2 Cycle 12."

¹ Applies to all fuel in the Unit 2 Cycle 12 Core.

² A discussion of the processes to be used to take these readings is provided in the basis for Technical Specification 3.2.5.

³ Includes a 1.9 °F measurement uncertainty per Reference 3.3.

⁴ Limit not applicable during either a Thermal Power ramp in excess of 5% of RTP per minute or a Thermal Power step in excess of 10% RTP. Includes a 9.6 PSI measurement uncertainty as read on QDPS display per Reference 3.4.

⁵ Includes a 2.8% flow measurement uncertainty.

Figure 1

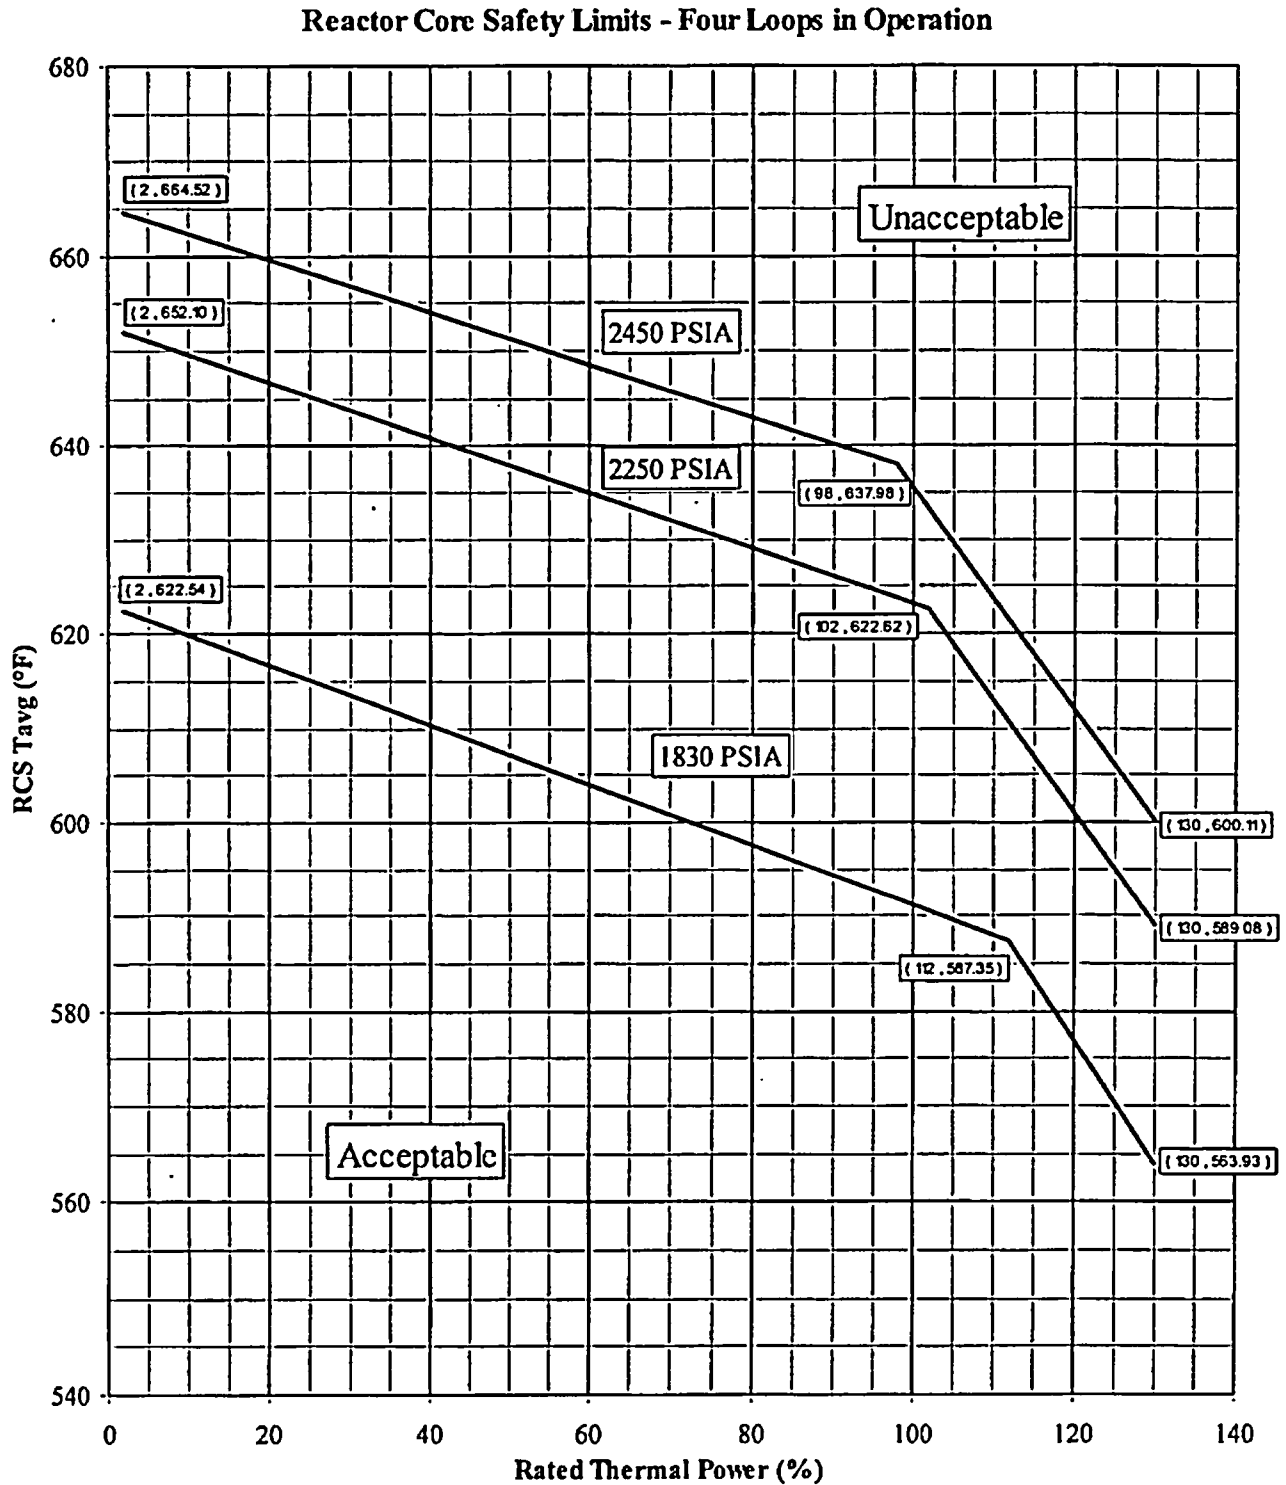


Figure 2

Required Shutdown Margin for Modes 3 & 4

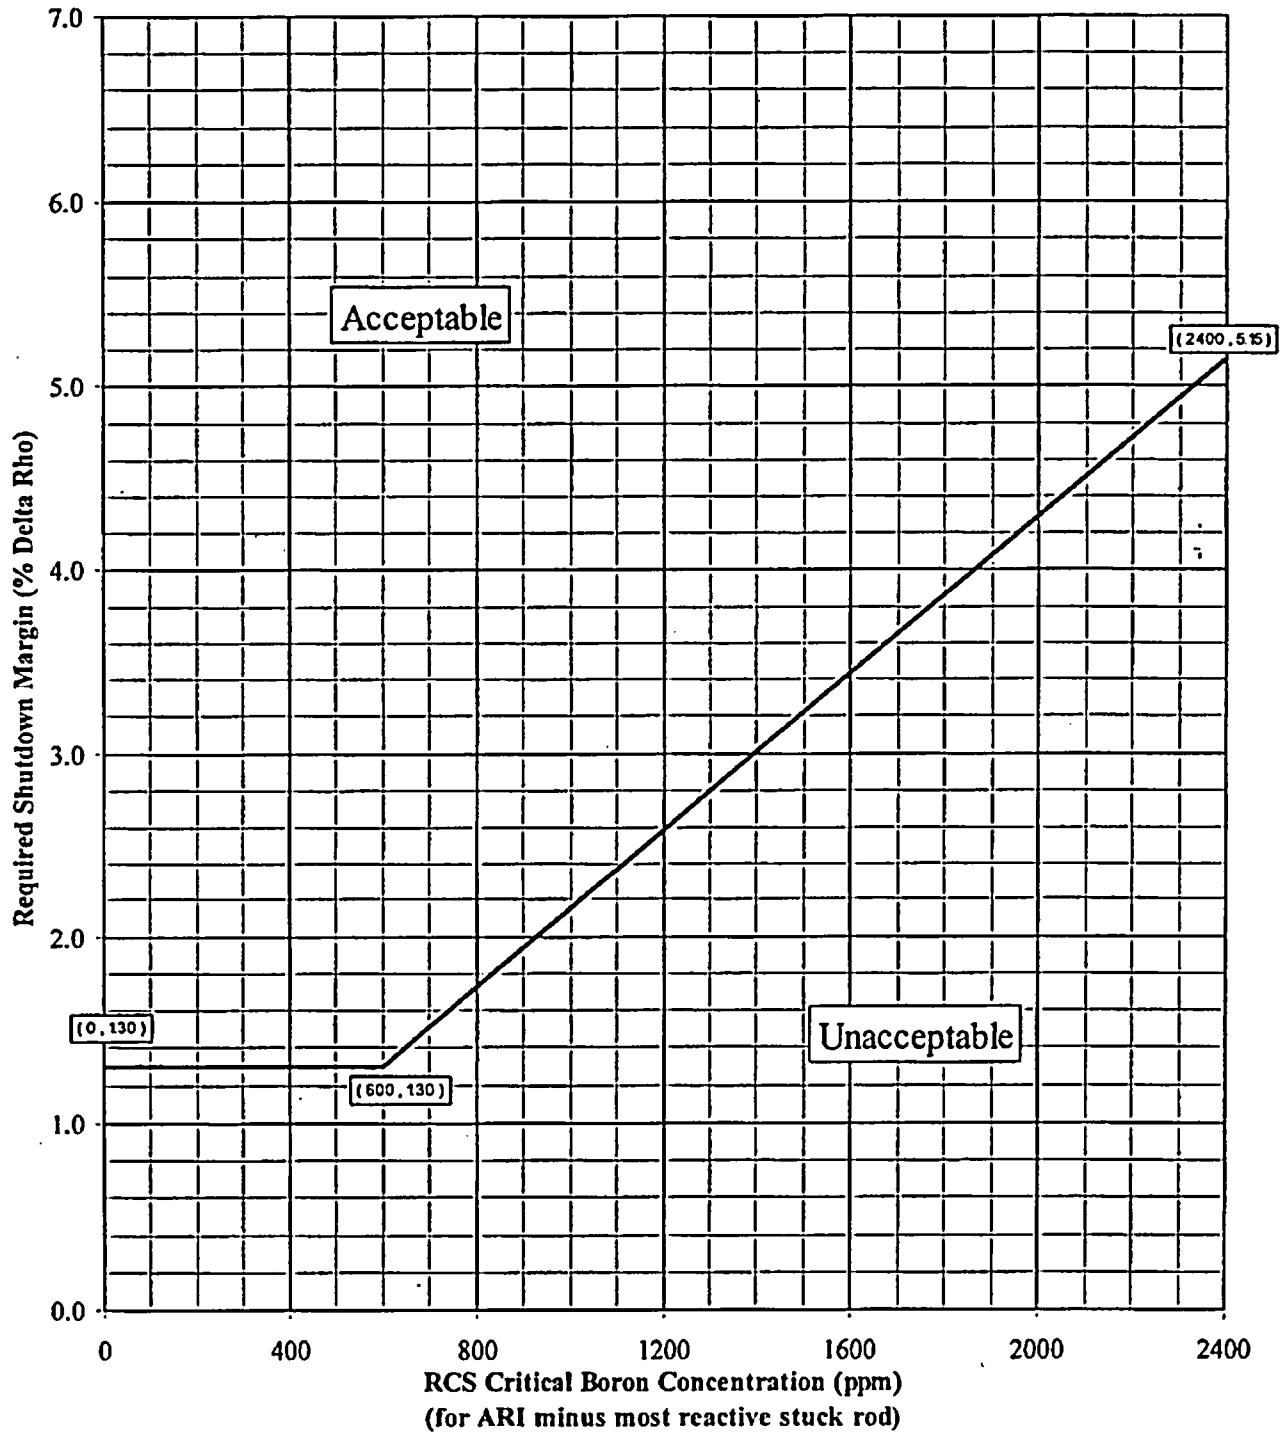


Figure 3

Required Shutdown Margin for Mode 5

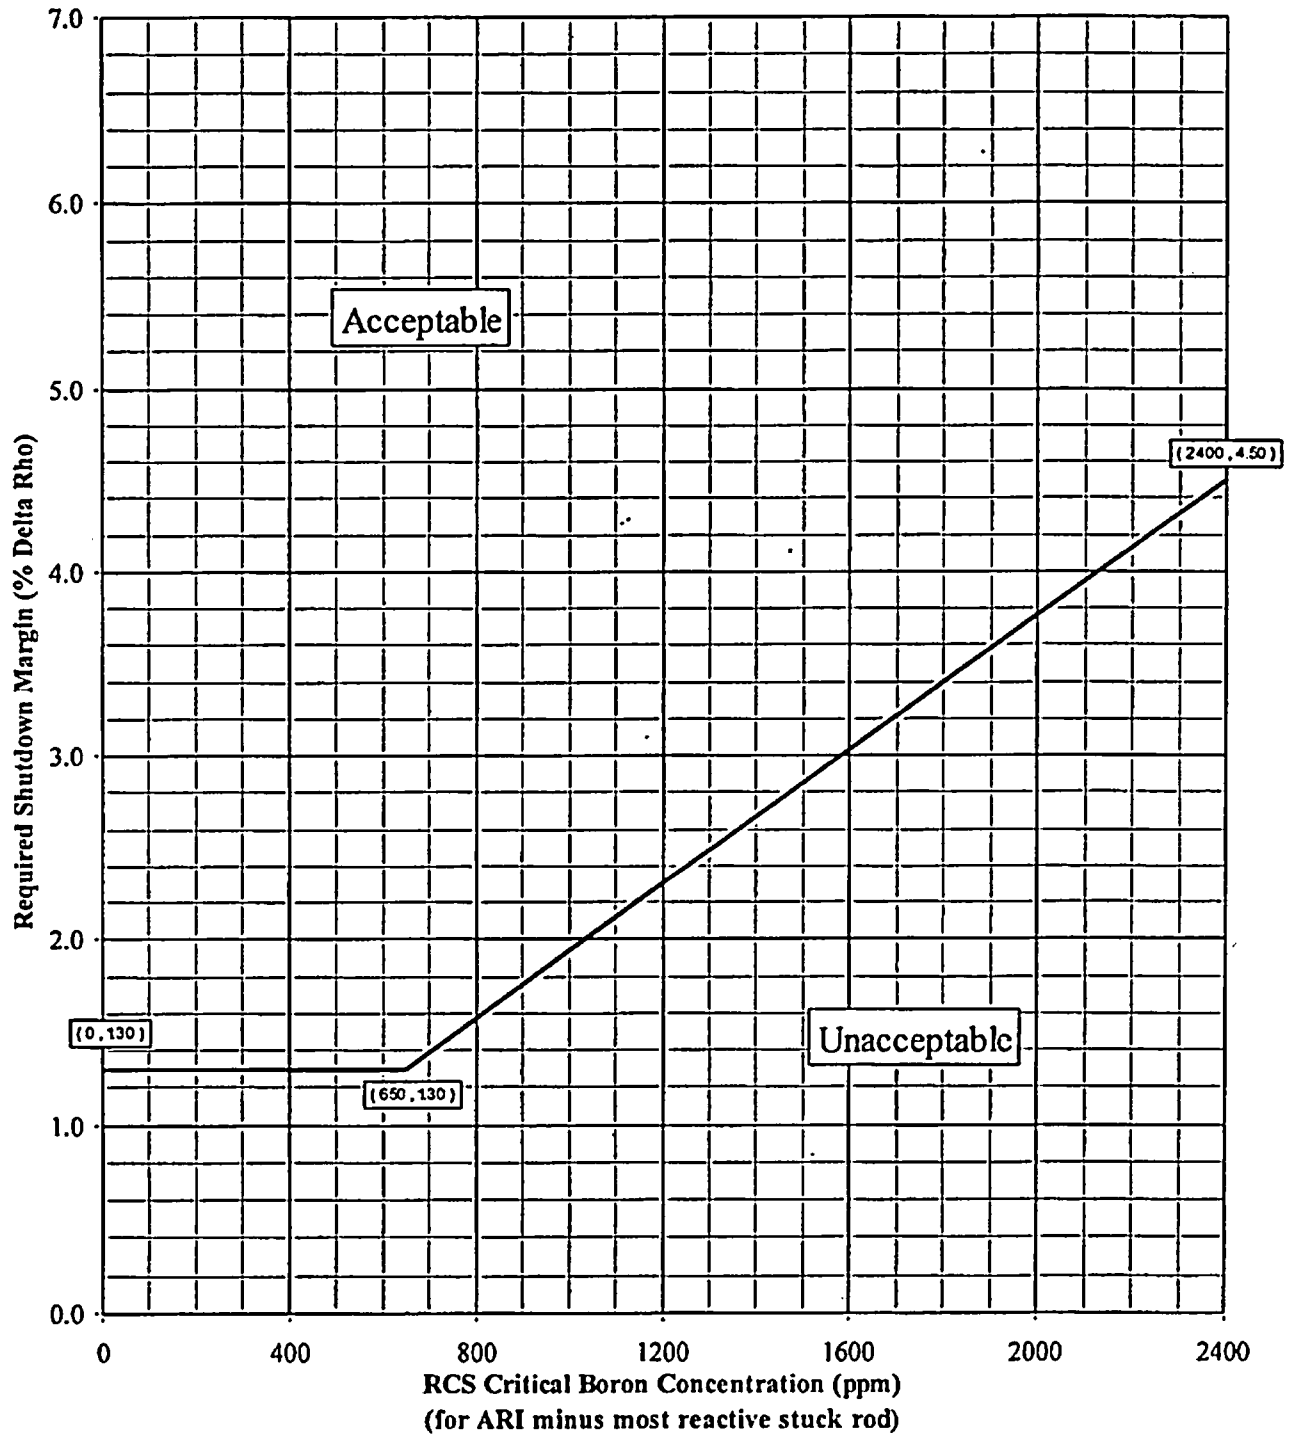


Figure 4

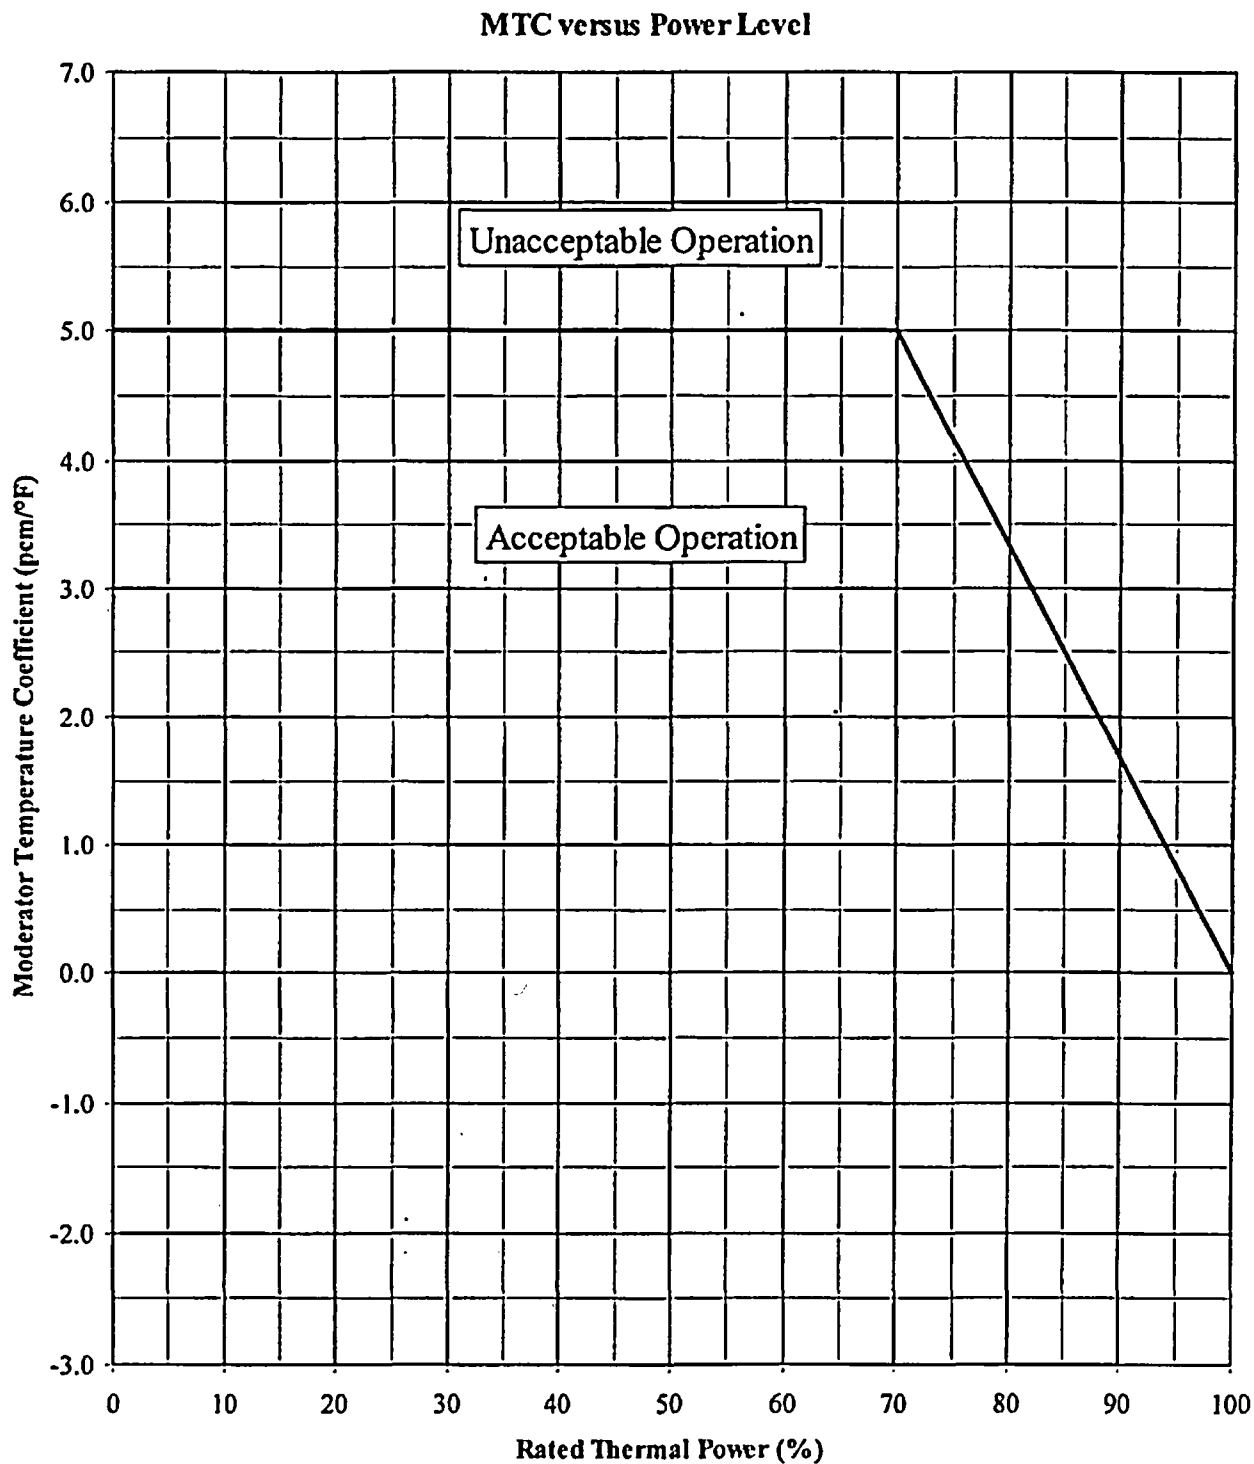


Figure 5

Control Rod Insertion Limits* versus Power Level

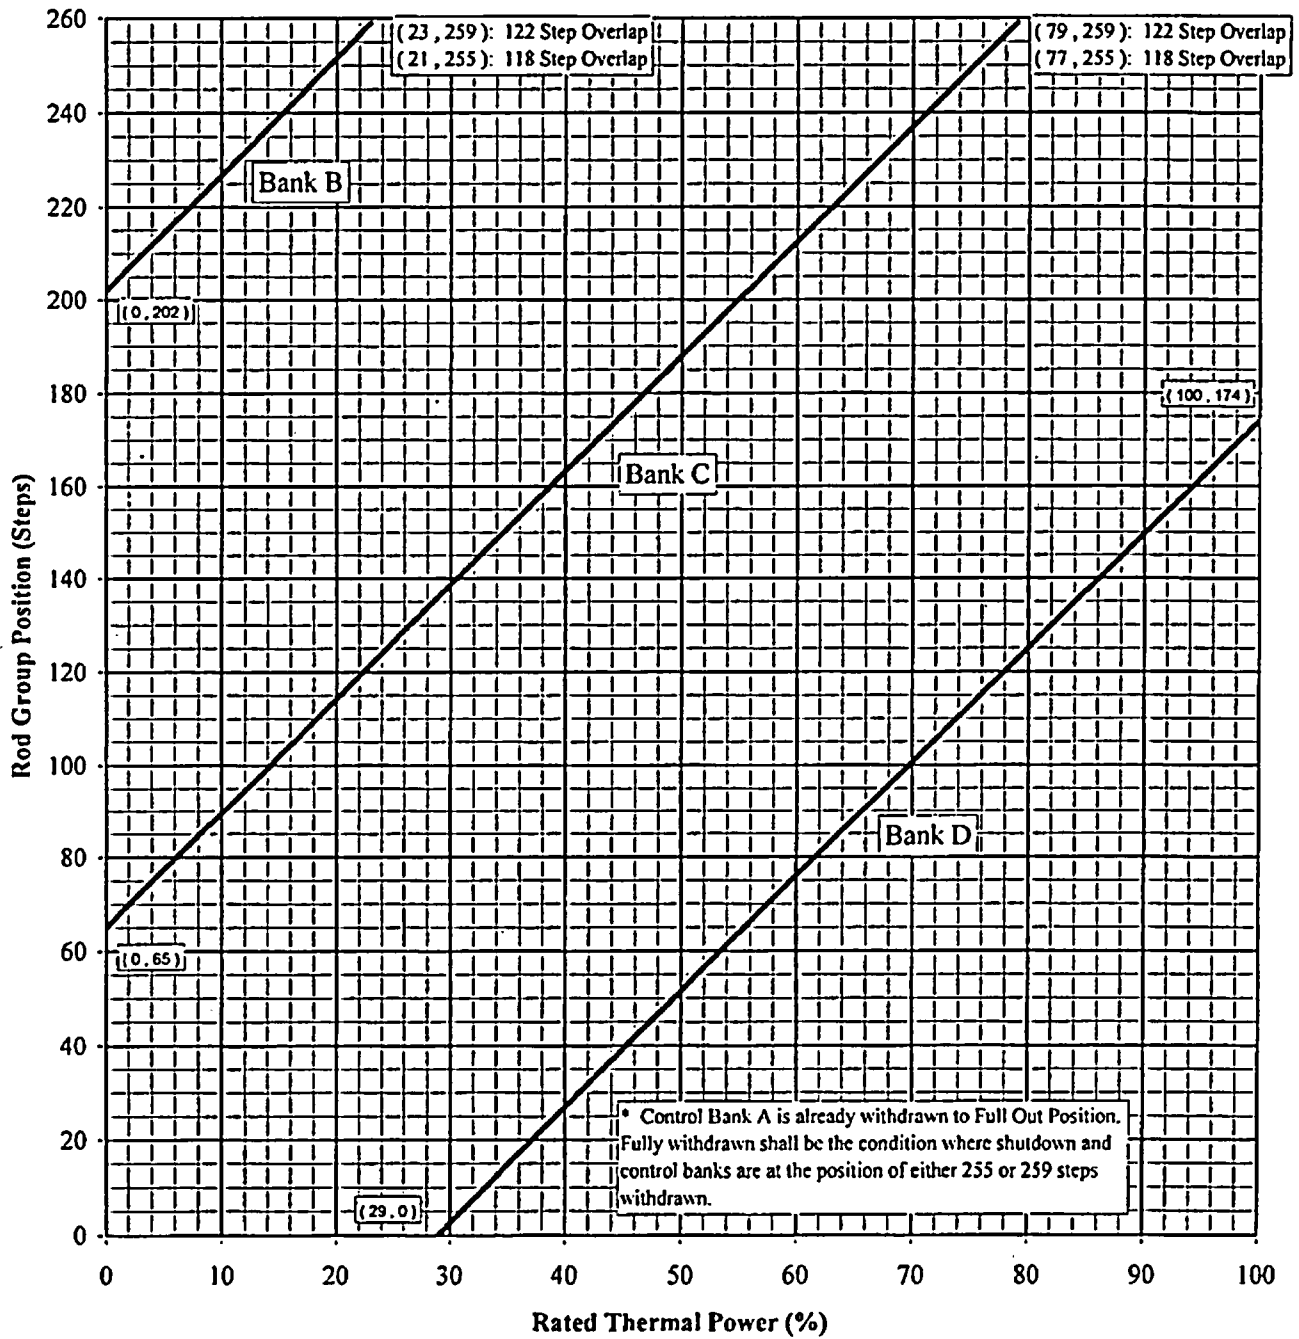


Figure 6

AFD Limits versus Power Level

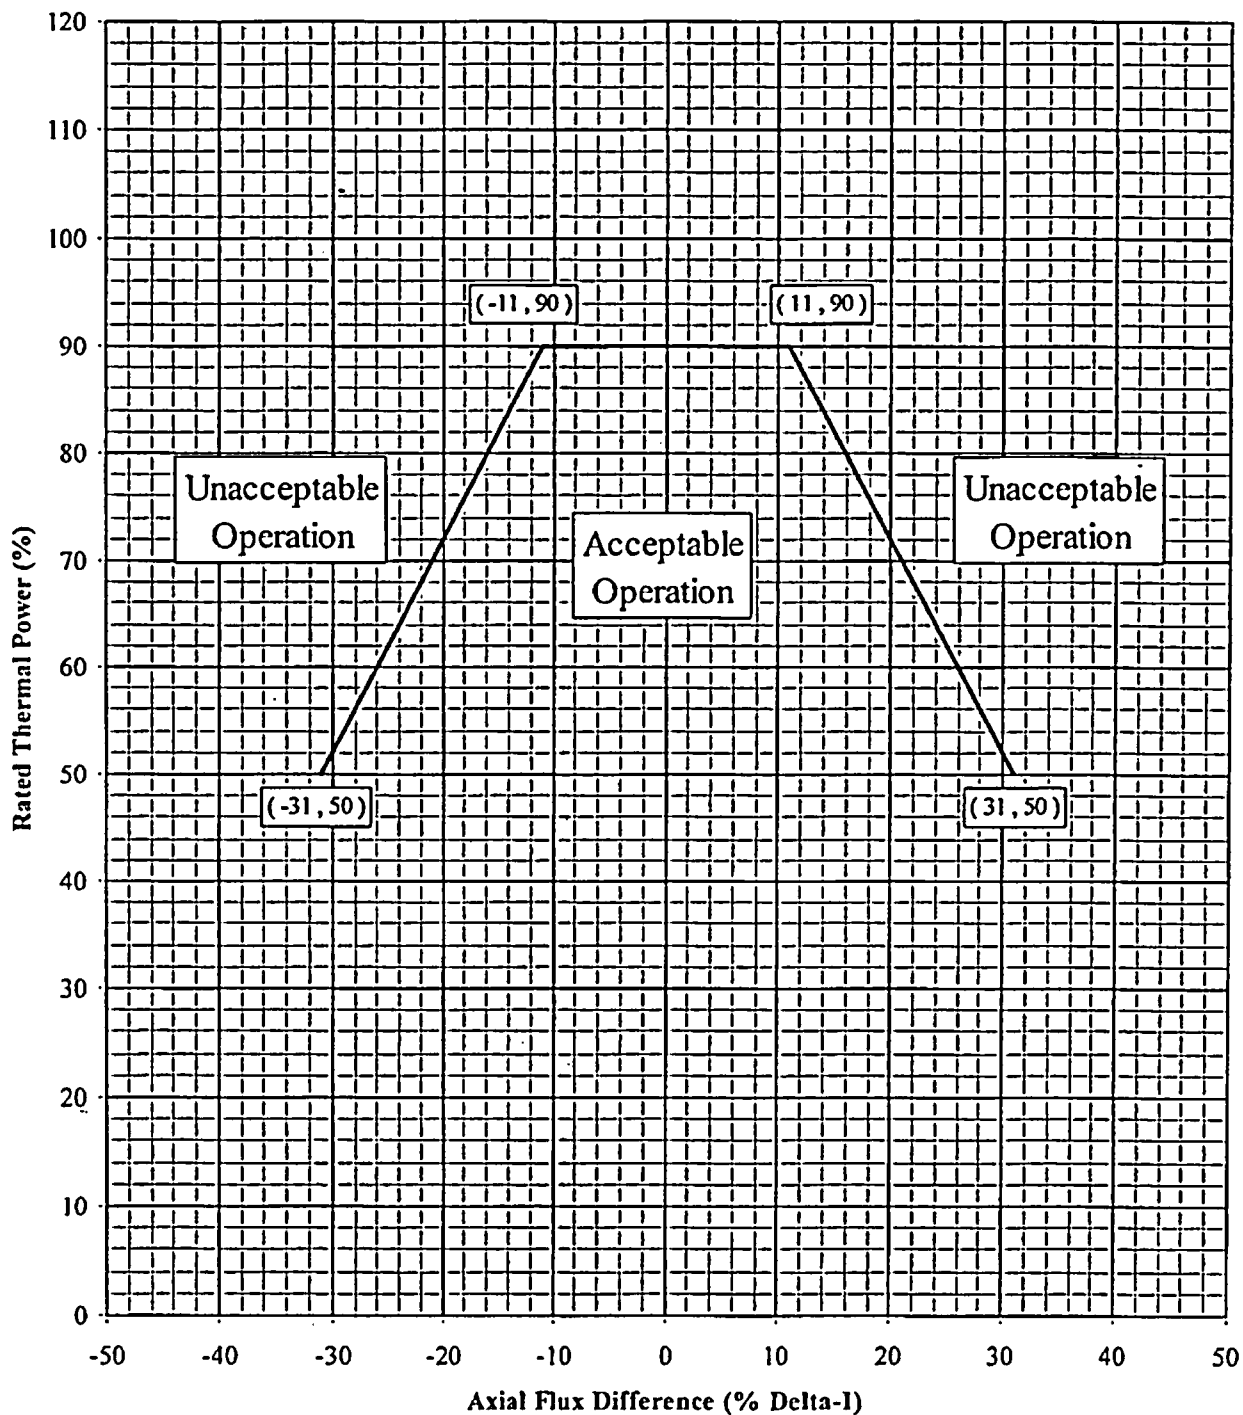


Figure 7

K(Z) - Normalized Fq(Z) versus Core Height

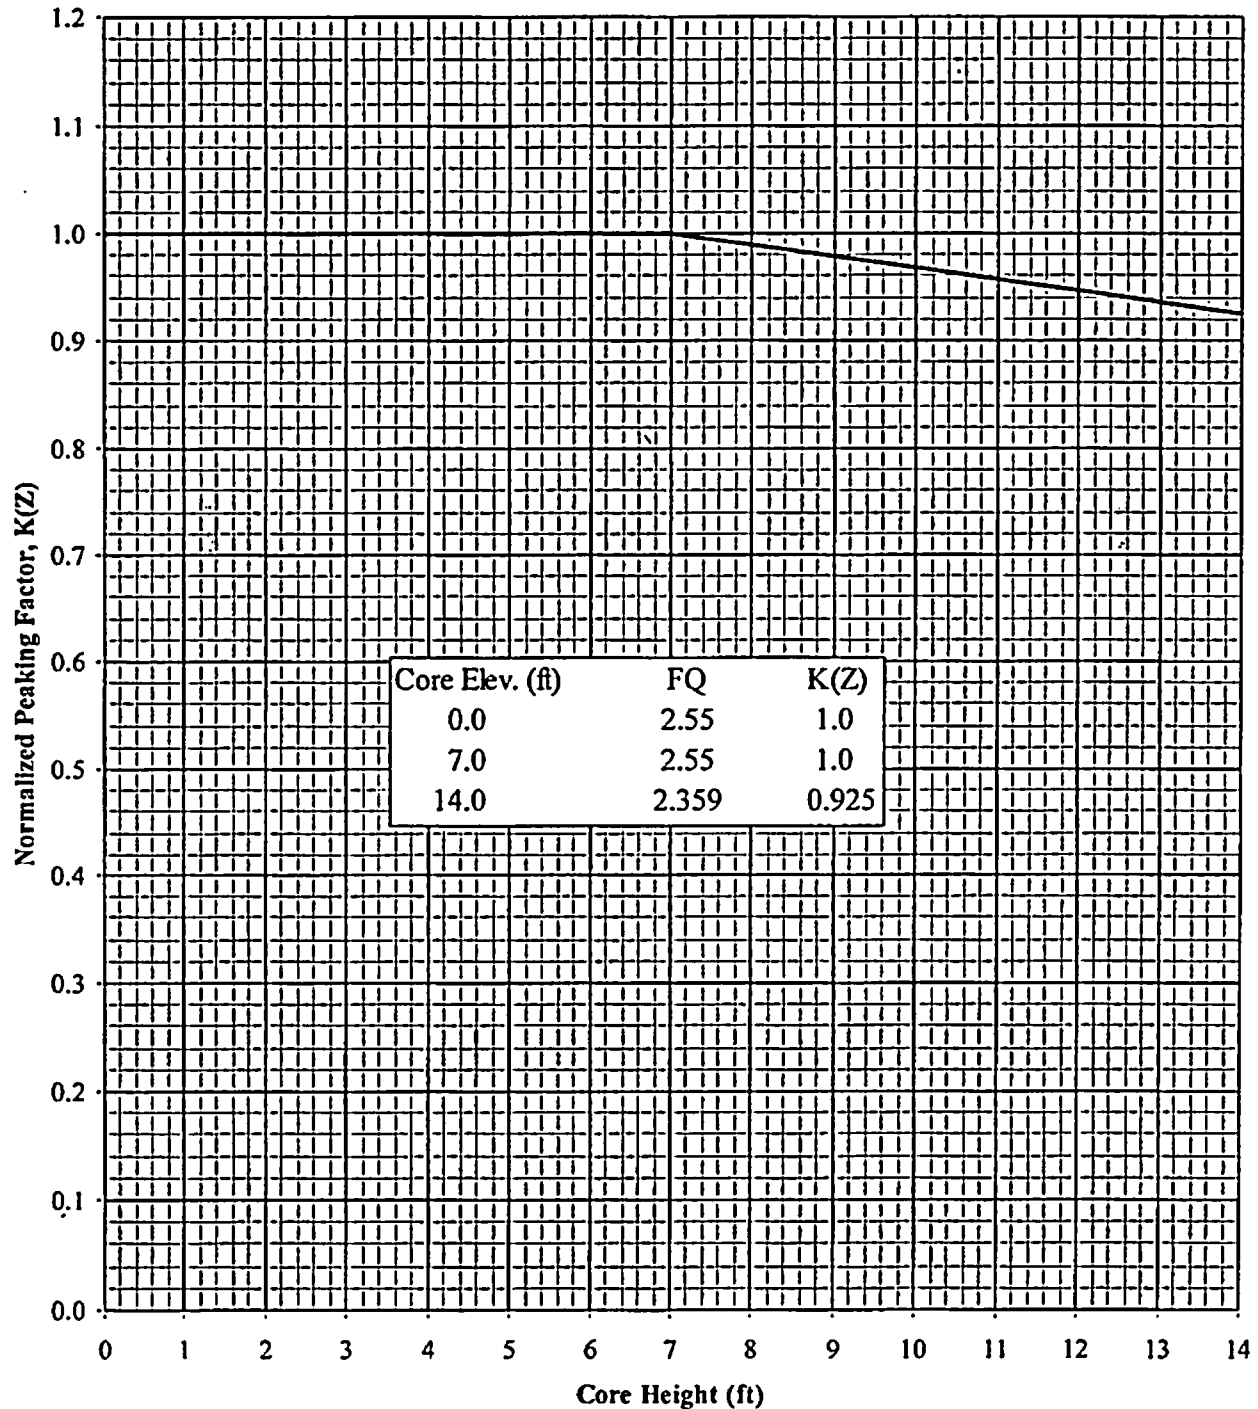


Table 1 (Part 1 of 2)
Unrodded F_{xy} for Each Core Height
for Cycle Burnups Less Than 9000 MWD/MTU

Core Height (Ft.)	Axial Point	Unrodded F_{xy}	Core Height (Ft.)	Axial Point	Unrodded F_{xy}
14.00	1	5.271	6.80	37	1.955
13.80	2	4.497	6.60	38	1.948
13.60	3	3.723	6.40	39	1.940
13.40	4	2.949	6.20	40	1.933
13.20	5	2.563	6.00	41	1.928
13.00	6	2.303	5.80	42	1.927
12.80	7	2.269	5.60	43	1.927
12.60	8	2.209	5.40	44	1.928
12.40	9	2.156	5.20	45	1.933
12.20	10	2.104	5.00	46	1.938
12.00	11	2.073	4.80	47	1.946
11.80	12	2.053	4.60	48	1.955
11.60	13	2.043	4.40	49	1.960
11.40	14	2.037	4.20	50	1.965
11.20	15	2.033	4.00	51	1.968
11.00	16	2.029	3.80	52	1.965
10.80	17	2.023	3.60	53	1.958
10.60	18	2.016	3.40	54	1.954
10.40	19	2.010	3.20	55	1.952
10.20	20	2.010	3.00	56	1.952
10.00	21	2.010	2.80	57	1.945
9.80	22	2.010	2.60	58	1.944
9.60	23	2.014	2.40	59	1.944
9.40	24	2.017	2.20	60	1.945
9.20	25	2.021	2.00	61	1.948
9.00	26	2.026	1.80	62	1.948
8.80	27	2.034	1.60	63	1.945
8.60	28	2.043	1.40	64	1.957
8.40	29	2.054	1.20	65	1.980
8.20	30	2.065	1.00	66	2.031
8.00	31	2.073	0.80	67	2.229
7.80	32	2.069	0.60	68	2.756
7.60	33	2.054	0.40	69	3.447
7.40	34	2.038	0.20	70	4.138
7.20	35	2.010	0.00	71	4.829
7.00	36	1.976			

Table 1 (Part 2 of 2)
Unrodded Fxy for Each Core Height
for Cycle Burnups Greater Than or Equal to 9000 MWD/MTU

Core Height (Ft.)	Axial Point	Unrodded Fxy	Core Height (Ft.)	Axial Point	Unrodded Fxy
14.00	1	4.128	6.80	37	2.142
13.80	2	3.681	6.60	38	2.141
13.60	3	3.234	6.40	39	2.129
13.40	4	2.788	6.20	40	2.116
13.20	5	2.497	6.00	41	2.102
13.00	6	2.254	5.80	42	2.092
12.80	7	2.190	5.60	43	2.081
12.60	8	2.133	5.40	44	2.071
12.40	9	2.084	5.20	45	2.060
12.20	10	2.043	5.00	46	2.051
12.00	11	2.014	4.80	47	2.042
11.80	12	2.013	4.60	48	2.035
11.60	13	2.017	4.40	49	2.025
11.40	14	2.026	4.20	50	2.015
11.20	15	2.031	4.00	51	2.003
11.00	16	2.036	3.80	52	1.992
10.80	17	2.042	3.60	53	1.982
10.60	18	2.045	3.40	54	1.972
10.40	19	2.046	3.20	55	1.960
10.20	20	2.048	3.00	56	1.944
10.00	21	2.049	2.80	57	1.925
9.80	22	2.051	2.60	58	1.899
9.60	23	2.054	2.40	59	1.873
9.40	24	2.058	2.20	60	1.846
9.20	25	2.062	2.00	61	1.837
9.00	26	2.066	1.80	62	1.833
8.80	27	2.069	1.60	63	1.832
8.60	28	2.073	1.40	64	1.832
8.40	29	2.078	1.20	65	1.862
8.20	30	2.084	1.00	66	1.932
8.00	31	2.091	0.80	67	2.144
7.80	32	2.099	0.60	68	2.520
7.60	33	2.107	0.40	69	2.976
7.40	34	2.116	0.20	70	3.433
7.20	35	2.127	0.00	71	3.889
7.00	36	2.137			