

Exelon Generation Company, LLC www.exeloncorp.com
Braidwood Station
35100 South Rt 53, Suite 84
Braceville, IL 60407-9619
Tel. 815-417-2000

November 7, 2005
BW050101

U.S. Nuclear Regulatory Commission
ATTN: Document Control Desk
Washington, DC 20555-0001


Braidwood Station, Unit 1
Facility Operating License No. NPF-72
NRC Docket No. STN 50-456

Subject: Core Operating Limits Report, Braidwood Unit 1 Cycle 12, Revision 3

The purpose of this letter is to transmit a mid-cycle revision of the Core Operating Limits Report (COLR) for Braidwood Unit 1 Cycle 12, in accordance with Technical Specification 5.6.5, "Core Operating Limits Report (COLR)." Item 2.6.2 of the COLR and the corresponding Figures are being revised with newly updated $W(z)$ data, a cycle dependent function that accounts for power distribution transients encountered during normal operation. The updated $W(z)$ data improves the transient peaking factor (F_Q) margin. Note that Revision 2 of the COLR was not implemented.

If you have any questions regarding this matter, please contact Mr. Dale Ambler, Regulatory Assurance Manager, at (815) 417-2800.

Sincerely,



Keith J. Polson
Site Vice President
Braidwood Station

Attachment: Core Operating Limits Report, Braidwood Unit 1 Cycle 12, Revision 3

cc: Regional Administrator – NRC Region III
 NRC Senior Resident Inspector – Braidwood Station

AD001

ATTACHMENT 1

Core Operating Limits Report

Braidwood Unit 1, Cycle 12

Revision 3

CORE OPERATING LIMITS REPORT (COLR) for BRAIDWOOD UNIT 1 CYCLE 12

1.0 CORE OPERATING LIMITS REPORT

This Core Operating Limits Report (COLR) for Braidwood Station Unit 1 Cycle 12 has been prepared in accordance with the requirements of Technical Specification 5.6.5 (ITS).

The Technical Specifications affected by this report are listed below:

SL	2.1.1	Reactor Core Safety Limits (SLs)
LCO	3.1.1	SHUTDOWN MARGIN (SDM)
LCO	3.1.3	Moderator Temperature Coefficient (MTC)
LCO	3.1.4	Rod Group Alignment Limits
LCO	3.1.5	Shutdown Bank Insertion Limits
LCO	3.1.6	Control Bank Insertion Limits
LCO	3.1.8	PHYSICS TESTS Exceptions – MODE 2
LCO	3.2.1	Heat Flux Hot Channel Factor ($F_Q(Z)$)
LCO	3.2.2	Nuclear Enthalpy Rise Hot Channel Factor ($F_{\Delta H}^N$)
LCO	3.2.3	AXIAL FLUX DIFFERENCE (AFD)
LCO	3.2.5	Departure from Nucleate Boiling Ratio (DNBR)
LCO	3.3.1	Reactor Trip System (RTS) Instrumentation
LCO	3.3.9	Boron Dilution Protection System (BDPS)
LCO	3.4.1	Reactor Coolant System (RCS) Pressure, Temperature, and Flow Departure from Nucleate Boiling (DNB) Limits
LCO	3.9.1	Boron Concentration

The portions of the Technical Requirements Manual affected by this report are listed below:

TRM TLCO 3.1.b	Boration Flow Paths – Operating
TRM TLCO 3.1.d	Charging Pumps – Operating
TRM TLCO 3.1.f	Borated Water Sources – Operating
TRM TLCO 3.1.g	Position Indication System – Shutdown
TRM TLCO 3.1.h	Shutdown Margin (SDM) – MODE 1 and MODE 2 with $k_{eff} \geq 1.0$
TRM TLCO 3.1.i	Shutdown Margin (SDM) – MODE 5
TRM TLCO 3.1.j	Shutdown and Control Rods
TRM TLCO 3.1.k	Position Indication System – Shutdown (Special Test Exception)

CORE OPERATING LIMITS REPORT (COLR) for BRAIDWOOD UNIT 1 CYCLE 12

2.0 OPERATING LIMITS

The cycle-specific parameter limits for the specifications listed in Section 1.0 are presented in the following subsections. These limits are applicable for the entire cycle unless otherwise identified. These limits have been developed using the NRC-approved methodologies specified in Technical Specification 5.6.5.

2.1 Reactor Core Safety Limits (SLs) (SL 2.1.1)

2.1.1 In MODES 1 and 2, the combination of Thermal Power, Reactor Coolant System (RCS) highest loop average temperature, and pressurizer pressure shall not exceed the limits specified in Figure 2.1.1.

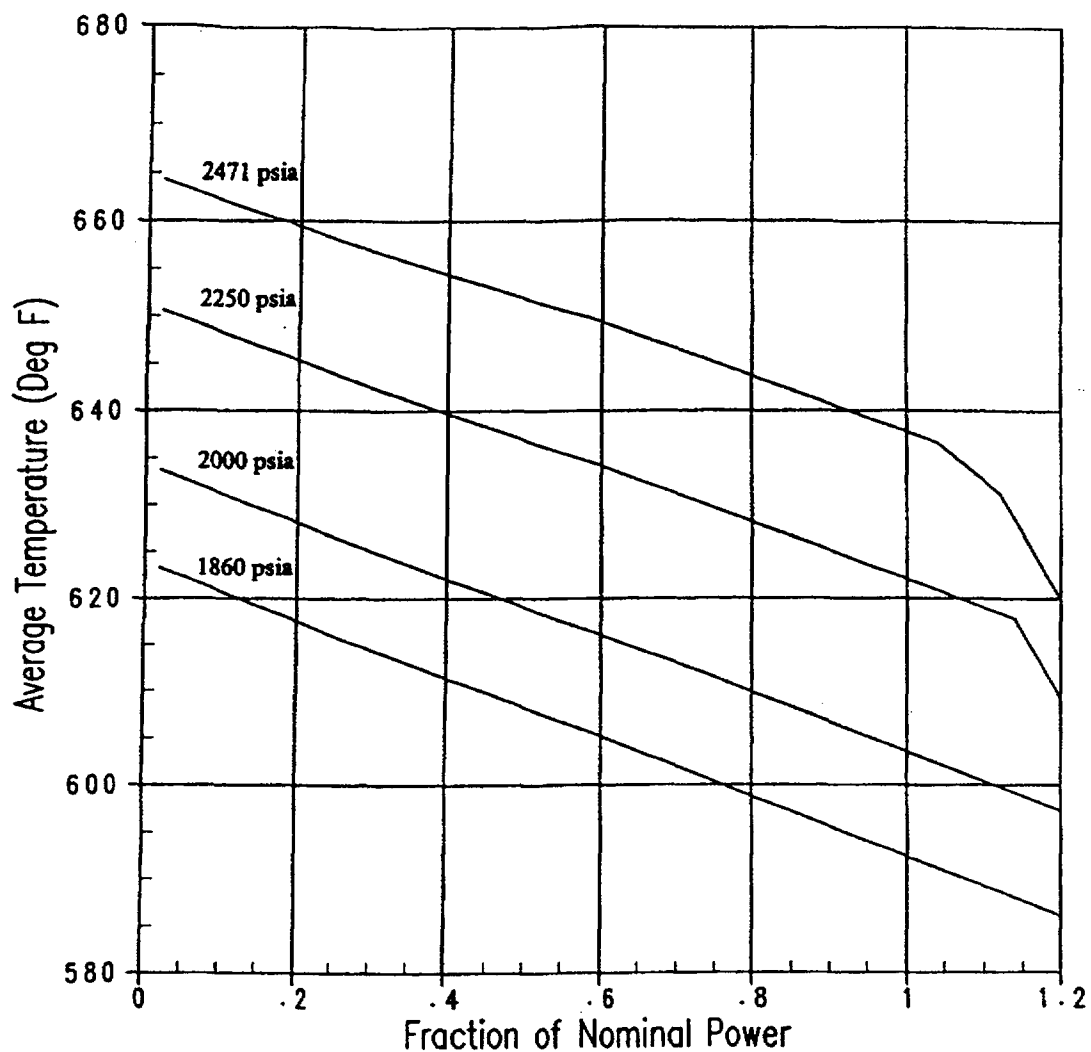


Figure 2.1.1: Reactor Core Limits

CORE OPERATING LIMITS REPORT (COLR) for BRAIDWOOD UNIT 1 CYCLE 12

2.2 SHUTDOWN MARGIN (SDM)

The SDM limit for MODES 1, 2, 3, and 4 is:

2.2.1 The SDM shall be greater than or equal to 1.3% $\Delta k/k$ (LCOs 3.1.1, 3.1.4, 3.1.5, 3.1.6, 3.1.8, 3.3.9; TRM TLCOs 3.1.b, 3.1.d, 3.1.f, 3.1.h, and 3.1.j).

The SDM limit for MODE 5 is:

2.2.2 SDM shall be greater than or equal to 1.3% $\Delta k/k$ (LCO 3.1.1, LCO 3.3.9; TRM TLCOs 3.1.i and 3.1.j).

2.3 Moderator Temperature Coefficient (MTC) (LCO 3.1.3)

The Moderator Temperature Coefficient (MTC) limits are:

2.3.1 The BOL/ARO/HZP-MTC upper limit shall be $+1.335 \times 10^{-5} \Delta k/k/^{\circ}F$.

2.3.2 The EOL/ARO/HFP-MTC lower limit shall be $-4.6 \times 10^{-4} \Delta k/k/^{\circ}F$.

2.3.3 The EOL/ARO/HFP-MTC Surveillance limit at 300 ppm shall be $-3.7 \times 10^{-4} \Delta k/k/^{\circ}F$.

2.3.4 The EOL/ARO/HFP-MTC Surveillance limit at 60 ppm shall be $-4.3 \times 10^{-4} \Delta k/k/^{\circ}F$.

where: BOL stands for Beginning of Cycle Life
 ARO stands for All Rods Out
 HZP stands for Hot Zero Thermal Power
 EOL stands for End of Cycle Life
 HFP stands for Hot Full Thermal Power

2.4 Shutdown Bank Insertion Limits (LCO 3.1.5)

2.4.1 All shutdown banks shall be fully withdrawn to at least 224 steps.

2.5 Control Bank Insertion Limits (LCO 3.1.6)

2.5.1 The control banks, with Bank A greater than or equal to 224 steps, shall be limited in physical insertion as shown in Figure 2.5.1.

2.5.2 Each control bank shall be considered fully withdrawn from the core at greater than or equal to 224 steps.


2.5.3 The control banks shall be operated in sequence by withdrawal of Bank A, Bank B, Bank C and Bank D. The control banks shall be sequenced in reverse order upon insertion.

2.5.4 Each control bank not fully withdrawn from the core shall be operated with the following overlap limits as a function of park position:

Park Position (step)	Overlap Limit (step)
225	110
226	111
227	112
228	113
229	114

CORE OPERATING LIMITS REPORT (COLR) for BRAIDWOOD UNIT 1 CYCLE 12

Figure 2.5.1:
Control Bank Insertion Limits Versus Percent Rated Thermal Power

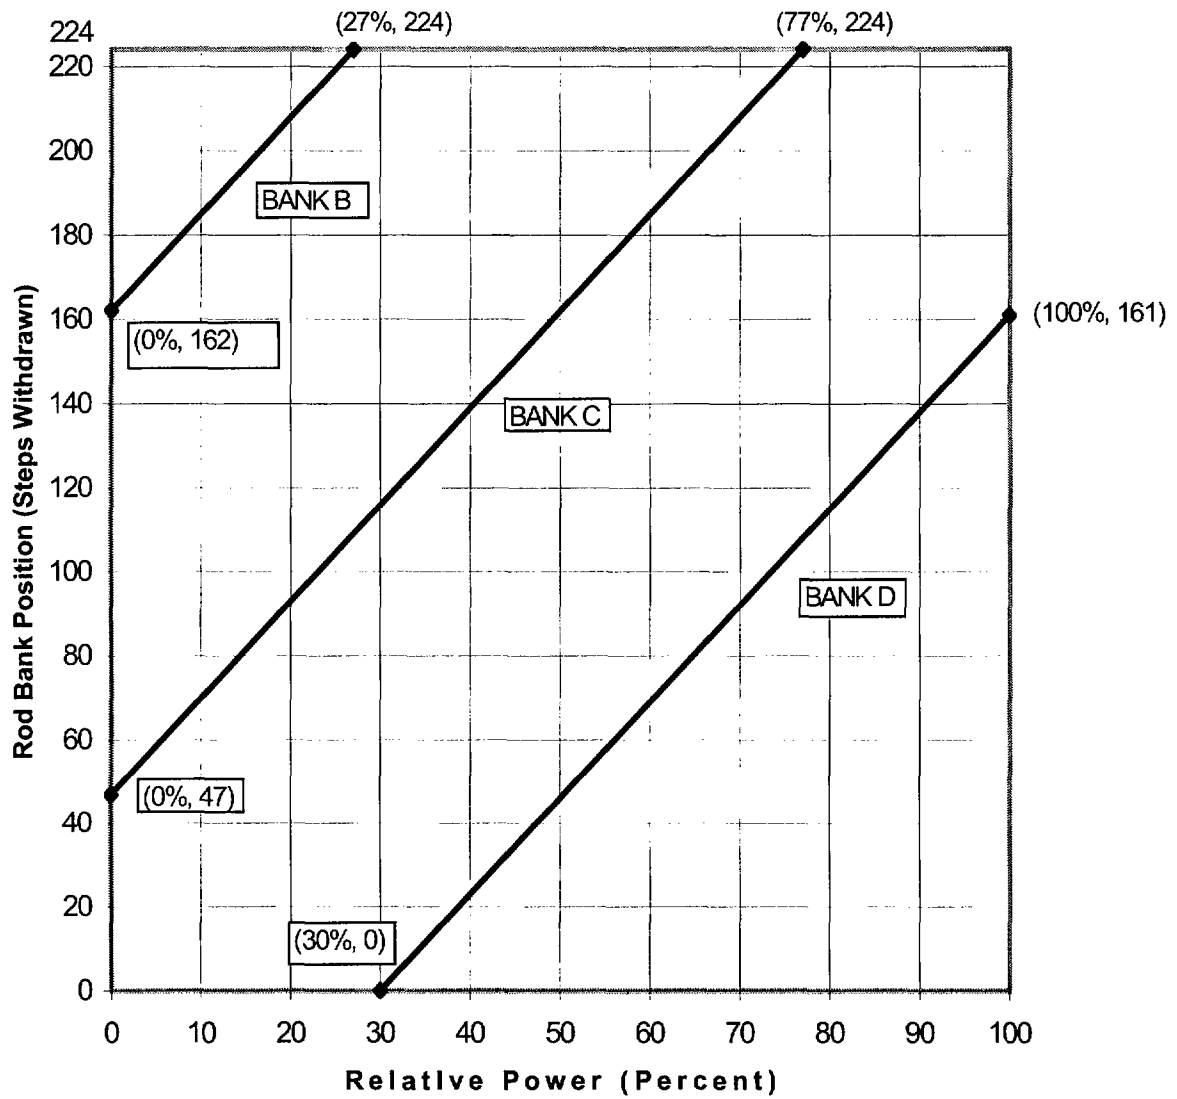

CORE OPERATING LIMITS REPORT (COLR) for BRAIDWOOD UNIT 1 CYCLE 12

2.6 Heat Flux Hot Channel Factor ($F_Q(Z)$) (LCO 3.2.1)

2.6.1 Total Peaking Factor:

$$F_Q(Z) \leq \frac{F_Q^{RTP}}{0.5} \times K(Z) \text{ for } P \leq 0.5$$

$$F_Q(Z) \leq \frac{F_Q^{RTP}}{P} \times K(Z) \text{ for } P > 0.5$$

where: P = the ratio of THERMAL POWER to RATED THERMAL POWER

$$F_Q^{RTP} = 2.60$$

$K(Z)$ is provided in Figure 2.6.1.

2.6.2 $W(Z)$ Values:

a) When PDMS is OPERABLE, $W(Z) = 1.00000$ for all axial points.

b) When PDMS is inoperable, $W(Z)$ is provided in Figures 2.6.2.a through 2.6.2.c.

The normal operation $W(Z)$ values have been determined at burnups of 14500, 16000, and 20000 MWD/MTU.

Table 2.6.2 shows the $F_Q^C(z)$ penalty factors that are greater than 2% per 31 Effective Full Power Days (EFPD). These values shall be used to increase the $F_Q^W(z)$ as per Surveillance Requirement 3.2.1.2. A 2% penalty factor shall be used at all cycle burnups that are outside the range of Table 2.6.2.

2.6.3 Uncertainty:

The uncertainty, U_{FQ} , to be applied to the Heat Flux Hot Channel Factor $F_Q(Z)$ shall be calculated by the following formula

$$U_{FQ} = U_{qu} \bullet U_e$$

where:

U_{qu} = Base F_Q measurement uncertainty = 1.05 when PDMS is inoperable
(U_{qu} is defined by PDMS when OPERABLE.)

U_e = Engineering uncertainty factor = 1.03


2.6.4 PDMS Alarms:

$F_Q(Z)$ Warning Setpoint $\geq 2\%$ of $F_Q(Z)$ Margin

$F_Q(Z)$ Alarm Setpoint $\geq 0\%$ of $F_Q(Z)$ Margin

CORE OPERATING LIMITS REPORT (COLR) for BRAIDWOOD UNIT 1 CYCLE 12

Figure 2.6.1
K(Z) - Normalized $F_Q(Z)$ as a Function of Core Height

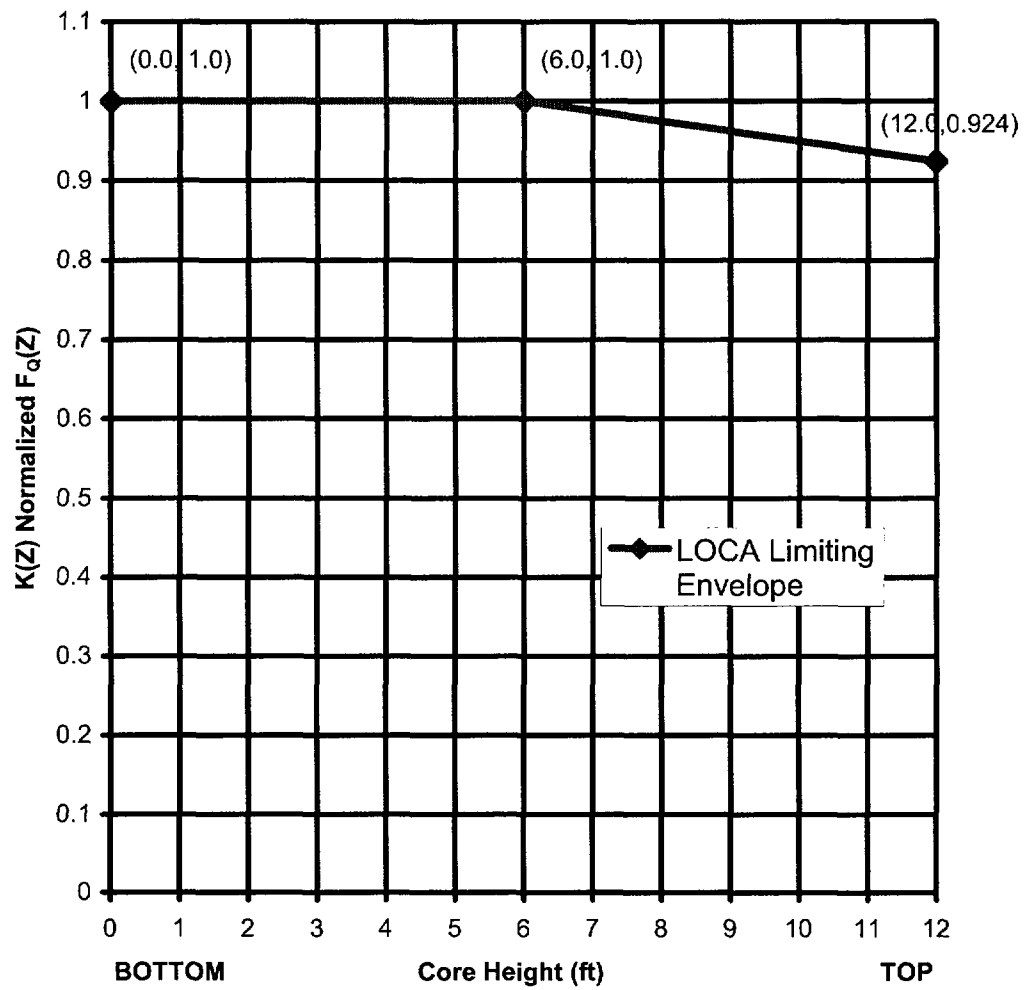


CORE OPERATING LIMITS REPORT (COLR) for BRAIDWOOD UNIT 1 CYCLE 12

Height Feet	MAX W(Z)
0.00	1.0000
0.20	1.0000
0.40	1.0000
0.60	1.0000
0.80	1.0000
1.00	1.0000
1.20	1.0000
1.40	1.0000
1.60	1.0000
1.80	1.2817
2.00	1.2618
2.20	1.2362
2.40	1.2190
2.60	1.2000
2.80	1.1904
3.00	1.1780
3.20	1.1648
3.40	1.1584
3.60	1.1513
3.80	1.1443
4.00	1.1379
4.20	1.1304
4.40	1.1221
4.60	1.1125
4.80	1.1040
5.00	1.0952
5.20	1.0859
5.40	1.0856
5.60	1.0933
5.80	1.1082
6.00	1.1238
6.20	1.1368
6.40	1.1496
6.60	1.1607
6.80	1.1699
7.00	1.1778
7.20	1.1839
7.40	1.1877
7.60	1.1892
7.80	1.1906
8.00	1.1888
8.20	1.1841
8.40	1.1817
8.60	1.1841
8.80	1.1877
9.00	1.1906
9.20	1.1905
9.40	1.1913
9.60	1.1951
9.80	1.2018
10.00	1.2079
10.20	1.2149
10.40	1.0000
10.60	1.0000
10.80	1.0000
11.00	1.0000
11.20	1.0000
11.40	1.0000
11.60	1.0000
11.80	1.0000
12.00	1.0000

Braidwood Unit 1 Cycle 12

Figure 2.6.2.a

Summary of W(Z) Function at 14500 MWD/MTU
(Top and Bottom 15% Excluded per WCAP-10216)

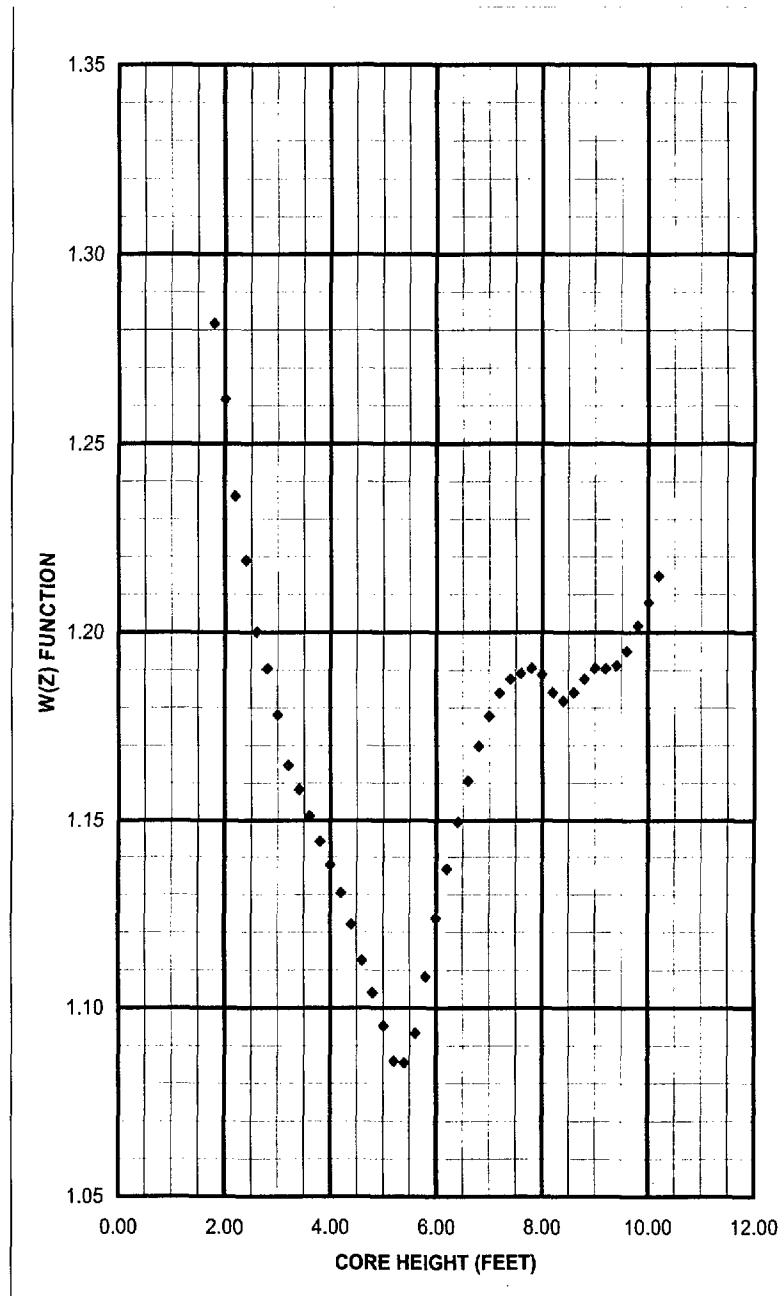


CORE OPERATING LIMITS REPORT (COLR) for BRAIDWOOD UNIT 1 CYCLE 12

Height Feet	MAX W(Z)
0.00	1.0000
0.20	1.0000
0.40	1.0000
0.60	1.0000
0.80	1.0000
1.00	1.0000
1.20	1.0000
1.40	1.0000
1.60	1.0000
1.80	1.2949
2.00	1.2761
2.20	1.2521
2.40	1.2358
2.60	1.2174
2.80	1.2070
3.00	1.1922
3.20	1.1801
3.40	1.1740
3.60	1.1666
3.80	1.1595
4.00	1.1525
4.20	1.1447
4.40	1.1358
4.60	1.1254
4.80	1.1160
5.00	1.1068
5.20	1.0970
5.40	1.0961
5.60	1.1035
5.80	1.1187
6.00	1.1348
6.20	1.1475
6.40	1.1588
6.60	1.1675
6.80	1.1749
7.00	1.1808
7.20	1.1844
7.40	1.1853
7.60	1.1839
7.80	1.1823
8.00	1.1787
8.20	1.1716
8.40	1.1668
8.60	1.1660
8.80	1.1683
9.00	1.1694
9.20	1.1674
9.40	1.1674
9.60	1.1729
9.80	1.1852
10.00	1.1956
10.20	1.2068
10.40	1.0000
10.60	1.0000
10.80	1.0000
11.00	1.0000
11.20	1.0000
11.40	1.0000
11.60	1.0000
11.80	1.0000
12.00	1.0000

Braidwood Unit 1 Cycle 12

Figure 2.6.2.b

Summary of W(Z) Function at 16000 MWD/MTU
(Top and Bottom 15% Excluded per WCAP-10216)

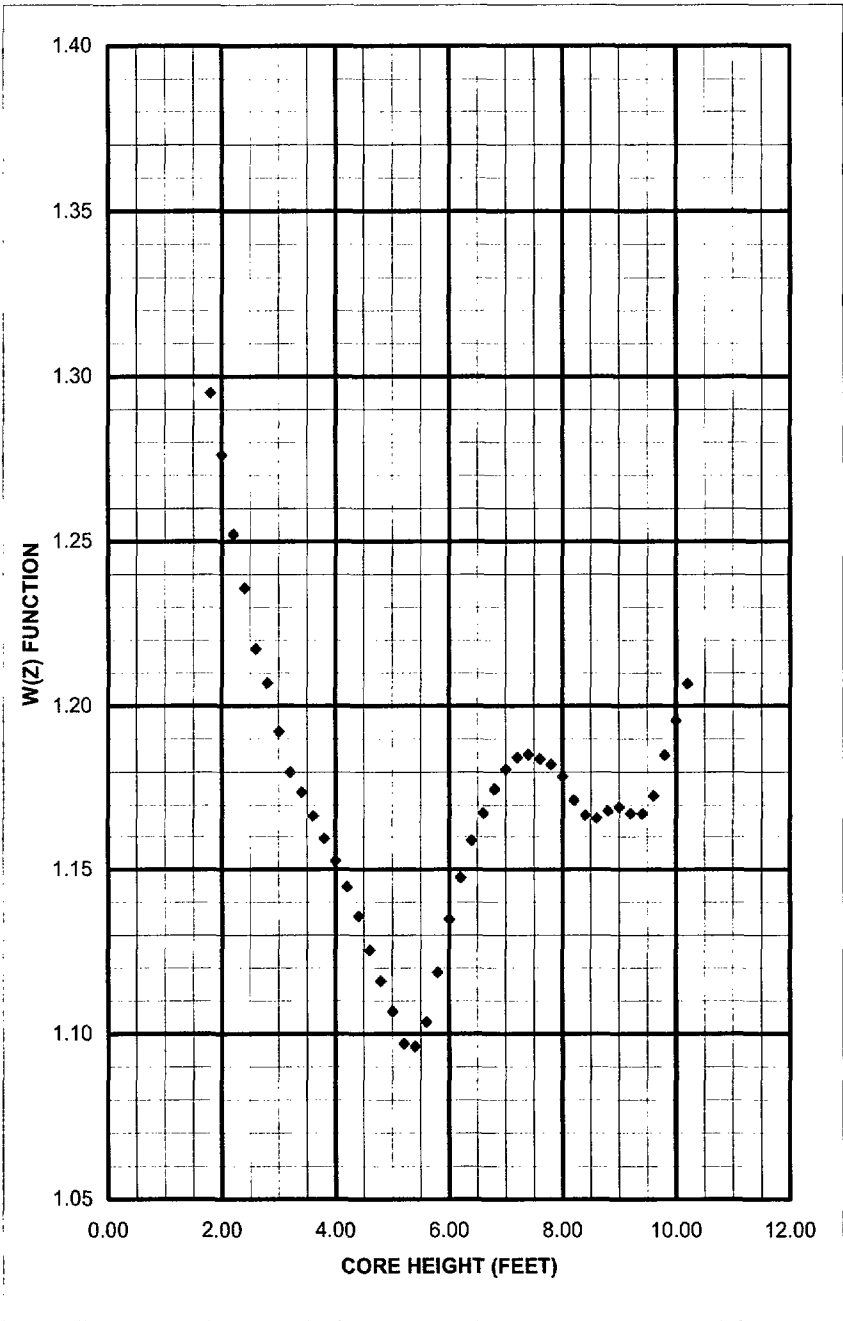


CORE OPERATING LIMITS REPORT (COLR) for BRAIDWOOD UNIT 1 CYCLE 12

Height Feet	MAX W(Z)
0.00	1.0000
0.20	1.0000
0.40	1.0000
0.60	1.0000
0.80	1.0000
1.00	1.0000
1.20	1.0000
1.40	1.0000
1.60	1.0000
1.80	1.2788
2.00	1.2610
2.20	1.2413
2.40	1.2270
2.60	1.2111
2.80	1.1957
3.00	1.1787
3.20	1.1785
3.40	1.1795
3.60	1.1780
3.80	1.1769
4.00	1.1739
4.20	1.1698
4.40	1.1651
4.60	1.1583
4.80	1.1544
5.00	1.1576
5.20	1.1597
5.40	1.1612
5.60	1.1679
5.80	1.1817
6.00	1.1975
6.20	1.2093
6.40	1.2203
6.60	1.2265
6.80	1.2328
7.00	1.2355
7.20	1.2342
7.40	1.2308
7.60	1.2239
7.80	1.2157
8.00	1.2063
8.20	1.1924
8.40	1.1797
8.60	1.1658
8.80	1.1656
9.00	1.1664
9.20	1.1645
9.40	1.1641
9.60	1.1770
9.80	1.2136
10.00	1.2471
10.20	1.2786
10.40	1.0000
10.60	1.0000
10.80	1.0000
11.00	1.0000
11.20	1.0000
11.40	1.0000
11.60	1.0000
11.80	1.0000
12.00	1.0000

Braidwood Unit 1 Cycle 12

Figure 2.6.2.c

Summary of W(Z) Function at 20000 MWD/MTU
(Top and Bottom 15% Excluded per WCAP-10216)

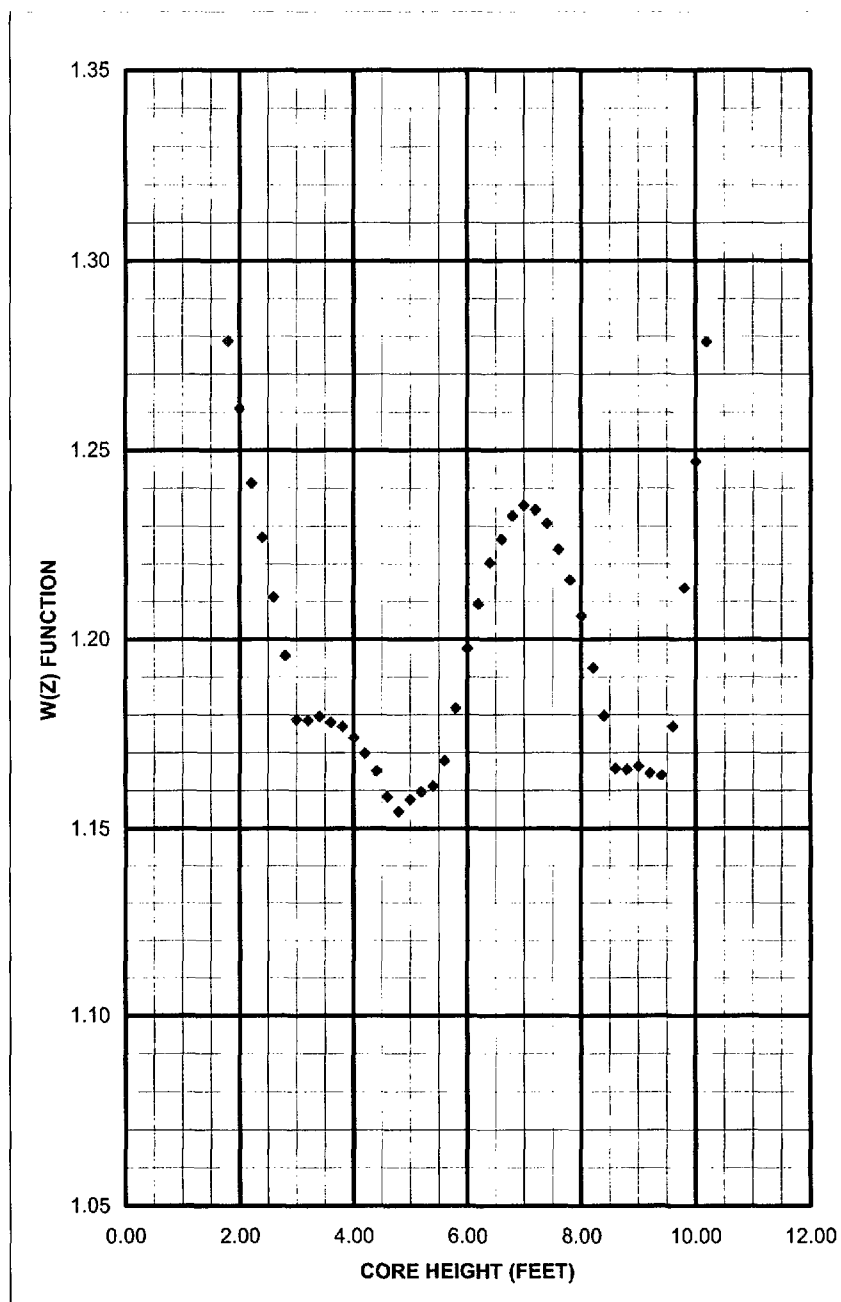

Note: Figure 2.6.2.c may be applied to cycle burnups greater than 20000 MWD/MTU to prevent W(Z) function extrapolation.

CORE OPERATING LIMITS REPORT (COLR) for BRAIDWOOD UNIT 1 CYCLE 12

Table 2.6.2 Penalty Factors in Excess of 2% per 31 EFPD	
Cycle Burnup (MWD/MTU)	Penalty Factor $F^C_{Q(z)}$
668	1.0200
841	1.0229
1013	1.0271
1186	1.0300
1359	1.0311
1877	1.0325
2395	1.0314
2567	1.0310
2740	1.0307
3258	1.0303
3431	1.0298
3776	1.0273
3949	1.0250
4121	1.0220
4294	1.0200
14136	1.0200
14309	1.0203
14481	1.0205
14654	1.0203
14827	1.0200

Notes:

Linear interpolation is adequate for intermediate cycle burnups.

All cycle burnups outside the range of the table shall use a 2% penalty factor for compliance with the 3.2.1.2 Surveillance Requirements.

CORE OPERATING LIMITS REPORT (COLR) for BRAIDWOOD UNIT 1 CYCLE 12

2.7 Nuclear Enthalpy Rise Hot Channel Factor ($F_{\Delta H}^N$) (LCO 3.2.2)

$$2.7.1 \quad F_{\Delta H}^N \leq F_{\Delta H}^{RTP} [1.0 + PF_{\Delta H}(1.0 - P)]$$

where: P = the ratio of THERMAL POWER to RATED THERMAL POWER

$$F_{\Delta H}^{RTP} = 1.70$$

$$PF_{\Delta H} = 0.3$$

2.7.2 Uncertainty when PDMS is inoperable

The uncertainty, $U_{F\Delta H}$, to be applied to the Nuclear Enthalpy Rise Hot Channel Factor $F_{\Delta H}^N$ shall be calculated by the following formula:

$$U_{F\Delta H} = U_{F\Delta Hm}$$

where:

$$U_{F\Delta Hm} = \text{Base } F_{\Delta H}^N \text{ measurement uncertainty} = 1.04$$

2.7.3 PDMS Alarms:

$F_{\Delta H}^N$ Warning Setpoint $\geq 2\%$ of $F_{\Delta H}^N$ Margin

$F_{\Delta H}^N$ Alarm Setpoint $\geq 0\%$ of $F_{\Delta H}^N$ Margin

2.8 AXIAL FLUX DIFFERENCE (AFD) (LCO 3.2.3)

2.8.1 When PDMS is inoperable, the AXIAL FLUX DIFFERENCE (AFD) Acceptable Operation Limits are provided in Figure 2.8.1 or the latest valid PDMS Surveillance Report, whichever is more conservative.

2.8.2 When PDMS is OPERABLE, no AFD Acceptable Operation Limits are applicable.

2.9 Departure from Nucleate Boiling Ratio (DNBR) (LCO 3.2.5)

$$2.9.1 \quad DNBR_{APSL} \geq 1.536$$

The Axial Power Shape Limiting DNBR ($DNBR_{APSL}$) is applicable with THERMAL POWER $\geq 50\%$ RTP when PDMS is OPERABLE.


2.9.2 PDMS Alarms:

DNBR Warning Setpoint $\geq 2\%$ of DNBR Margin

DNBR Alarm Setpoint $\geq 0\%$ of DNBR Margin

CORE OPERATING LIMITS REPORT (COLR) for BRAIDWOOD UNIT 1 CYCLE 12

Figure 2.8.1 Axial Flux Difference Limits as a Function of Rated Thermal Power

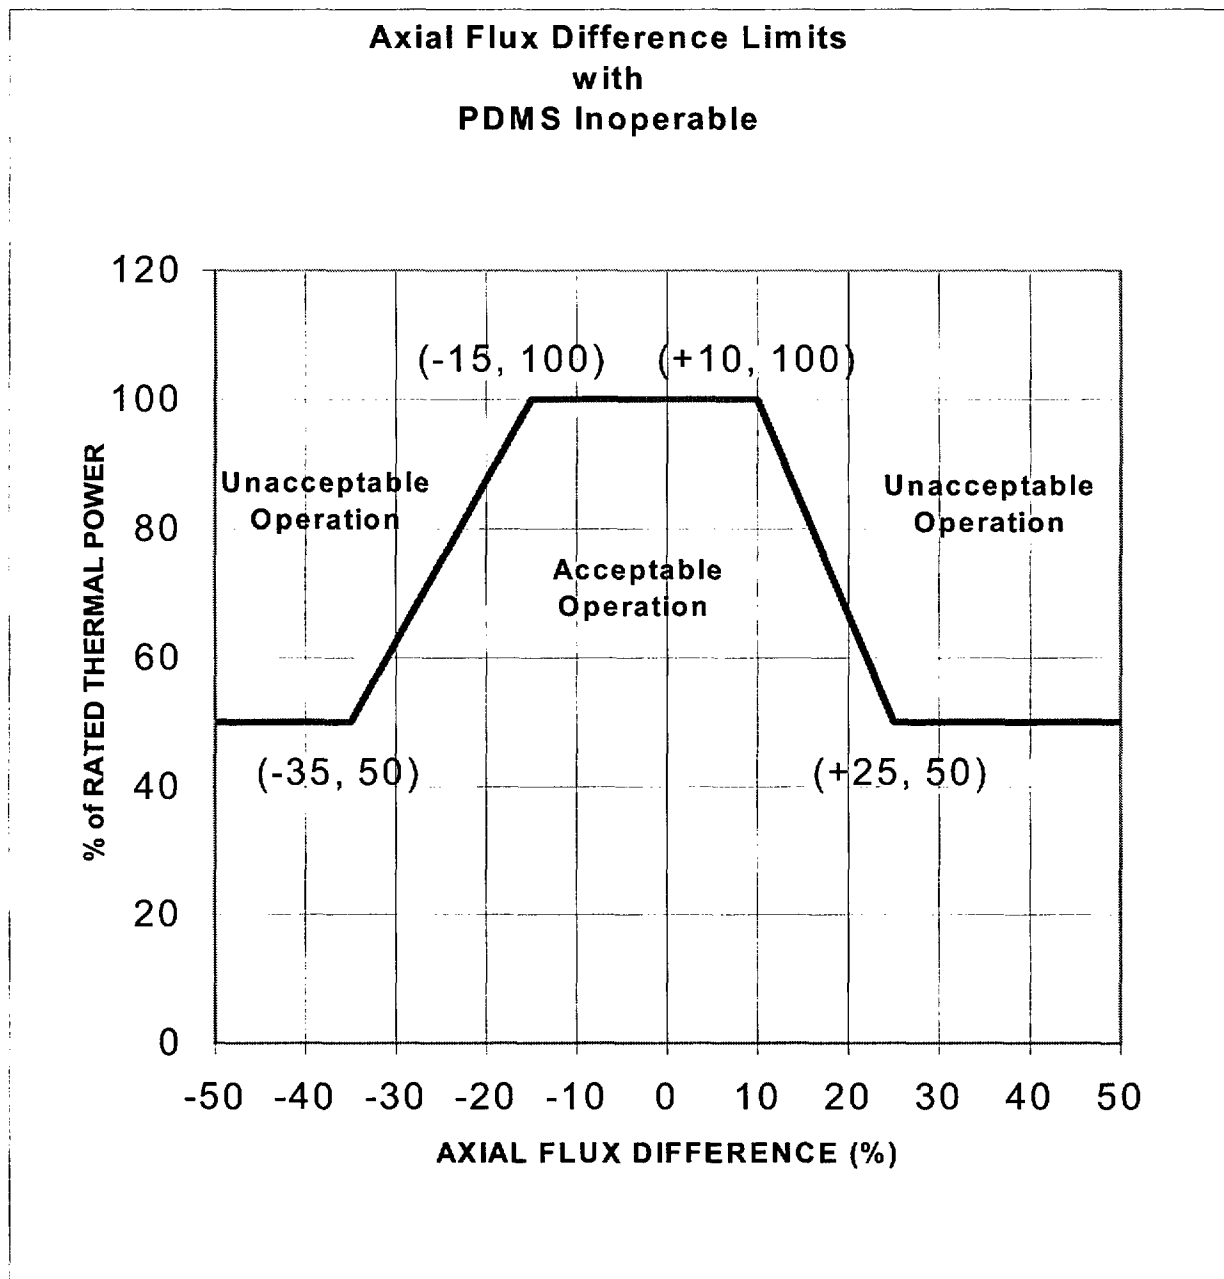

CORE OPERATING LIMITS REPORT (COLR) for BRAIDWOOD UNIT 1 CYCLE 12

2.10 Reactor Trip System (RTS) Instrumentation (LCO 3.3.1) - Overtemperature ΔT Setpoint Parameter Values

- 2.10.1 The Overtemperature ΔT reactor trip setpoint K_1 shall be equal to 1.325.
- 2.10.2 The Overtemperature ΔT reactor trip setpoint T_{avg} coefficient K_2 shall be equal to 0.0297 / °F.
- 2.10.3 The Overtemperature ΔT reactor trip setpoint pressure coefficient K_3 shall be equal to 0.00181 / psi.
- 2.10.4 The nominal T_{avg} at RTP (indicated) T' shall be less than or equal to 588.0 °F.
- 2.10.5 The nominal RCS operating pressure (indicated) P' shall be equal to 2235 psig.
- 2.10.6 The measured reactor vessel ΔT lead/lag time constant τ_1 shall be equal to 8 sec.
- 2.10.7 The measured reactor vessel ΔT lead/lag time constant τ_2 shall be equal to 3 sec.
- 2.10.8 The measured reactor vessel ΔT lag time constant τ_3 shall be less than or equal to 2 sec.
- 2.10.9 The measured reactor vessel average temperature lead/lag time constant τ_4 shall be equal to 33 sec.
- 2.10.10 The measured reactor vessel average temperature lead/lag time constant τ_5 shall be equal to 4 sec.
- 2.10.11 The measured reactor vessel average temperature lag time constant τ_6 shall be less than or equal to 2 sec.
- 2.10.12 The $f_1 (\Delta I)$ "positive" breakpoint shall be +10% ΔI .
- 2.10.13 The $f_1 (\Delta I)$ "negative" breakpoint shall be -18% ΔI .
- 2.10.14 The $f_1 (\Delta I)$ "positive" slope shall be +3.47% / % ΔI .
- 2.10.15 The $f_1 (\Delta I)$ "negative" slope shall be -2.61% / % ΔI .

CORE OPERATING LIMITS REPORT (COLR) for BRAIDWOOD UNIT 1 CYCLE 12

2.11 Reactor Trip System (RTS) Instrumentation (LCO 3.3.1) - Overpower ΔT Setpoint Parameter Values

- 2.11.1 The Overpower ΔT reactor trip setpoint K_4 shall be equal to 1.072.
- 2.11.2 The Overpower ΔT reactor trip setpoint T_{avg} rate/lag coefficient K_5 shall be equal to 0.02 / °F for increasing T_{avg} .
- 2.11.3 The Overpower ΔT reactor trip setpoint T_{avg} rate/lag coefficient K_5 shall be equal to 0 / °F for decreasing T_{avg} .
- 2.11.4 The Overpower ΔT reactor trip setpoint T_{avg} heatup coefficient K_6 shall be equal to 0.00245 / °F when $T > T''$.
- 2.11.5 The Overpower ΔT reactor trip setpoint T_{avg} heatup coefficient K_6 shall be equal to 0 / °F when $T \leq T''$.
- 2.11.6 The nominal T_{avg} at RTP (indicated) T'' shall be less than or equal to 588.0 °F
- 2.11.7 The measured reactor vessel ΔT lead/lag time constant τ_1 shall be equal to 8 sec.
- 2.11.8 The measured reactor vessel ΔT lead/lag time constant τ_2 shall be equal to 3 sec.
- 2.11.9 The measured reactor vessel ΔT lag time constant τ_3 shall be less than or equal to 2 sec.
- 2.11.10 The measured reactor vessel average temperature lag time constant τ_6 shall be less than or equal to 2 sec.
- 2.11.11 The measured reactor vessel average temperature rate/lag time constant τ_7 shall be equal to 10 sec.
- 2.11.12 The $f_2(\Delta I)$ "positive" breakpoint shall be 0 for all ΔI .
- 2.11.13 The $f_2(\Delta I)$ "negative" breakpoint shall be 0 for all ΔI .
- 2.11.14 The $f_2(\Delta I)$ "positive" slope shall be 0 for all ΔI .
- 2.11.15 The $f_2(\Delta I)$ "negative" slope shall be 0 for all ΔI .

CORE OPERATING LIMITS REPORT (COLR) for BRAIDWOOD UNIT 1 CYCLE 12

2.12 Reactor Coolant System (RCS) Pressure, Temperature, and Flow Departure from Nucleate Boiling (DNB) Limits (LCO 3.4.1)

2.12.1 The pressurizer pressure shall be greater than or equal to 2209 psig.

2.12.2 The RCS average temperature (T_{avg}) shall be less than or equal to 593.1 °F.

2.12.3 The RCS total flow rate shall be greater than or equal to 386,000 gpm.

2.13 Boron Concentration

2.13.1 The refueling boron concentration shall be greater than or equal to the value given in the Table below (LCO 3.9.1). The reported value also bounds the end-of-cycle requirements for the previous cycle.

2.13.2 To maintain $k_{eff} \leq 0.987$ with all shutdown and control rods fully withdrawn in MODES 3, 4, or 5 (TRM TLCO 3.1.g Required Action B.2 and TRM TLCO 3.1.k.2), the Reactor Coolant System boron concentration shall be greater than or equal to the values given in the Table below.

COLR Section	Conditions	Boron Concentration (ppm)
2.13.1	Refueling	1781
2.13.2	a) prior to initial criticality	1871
2.13.2	b) all other times in core life	2066