

THIS PAGE INTENTIONALLY LEFT BLANK

## Appendix E

Neutron Shield Tank  
Flexible Hose Evaluation

The neutron shield water jacket on the cask is connected to expansion tanks by means of a flexible hose with Snap-Tite valved quick disconnect couplings. The flexible hose construction consists of a corrugated stainless steel tube which is wrapped with stainless wire braid. (See Material Specification Section - page VI-3 through VI-6) Braiding prevents hose elongation under pressure, dampens vibration and provides mechanical protection for the corrugated stainless steel tube core.

The flexible metal hose is well suited for the service intended. All components of the hose assembly are stainless steel and have a high resistance to deterioration and aging which is normally associated with rubber type hoses. The maximum allowable operating temperature for the flexible metal hose is 1500°F (Anaconda Metal Hose Div. Bulletin CR (3ED)). The bursting pressure for the  $\frac{1}{2}$ " BW21-1H Anaconda Metal Hose is 3000 psig. Using the temperature correction factors and the recommended factor of safety of 4:1 as given in the Anaconda Metal Hose Div. Bulletin EN-1 (3ED) the following safe operating pressure

is determined:

- Maximum operating temperature - 340°F
- System design pressure - 235 psig
- Temperature correction factor - 0.83
- Rated bursting pressure - 8,000 psig
- Rated bursting pressure at temperature -  $8000 \times 0.83$   
= 6640 psig

Safe operating pressure (4:1 F.S.):



$$\frac{6640}{4} = 1660 \text{ psig}$$

Margin of safety on operating pressure:

$$\frac{1660}{235} - 1 = 6.06$$

The flexible metal hose system is not susceptible to failure as a result of improper hook-up or operator error. The hose is fitted with quick disconnect valved type couplings which requires the operator to perform a definite operation in order to complete the connection. If the operator does not perform the operations correctly, the coupling halves will not make up and the result is immediately obvious. There would be no leakage of shield water in such an event, since both coupling halves are equipped with a spring loaded plunger arrangement which seals off flow when the coupling is disconnected.

The flexible metal hose assembly is not susceptible to failure due to normal transport and handling conditions. The manufacturer states that the hose assembly will accept normal vibrations encountered in average industrial applications as shown on the graph below.

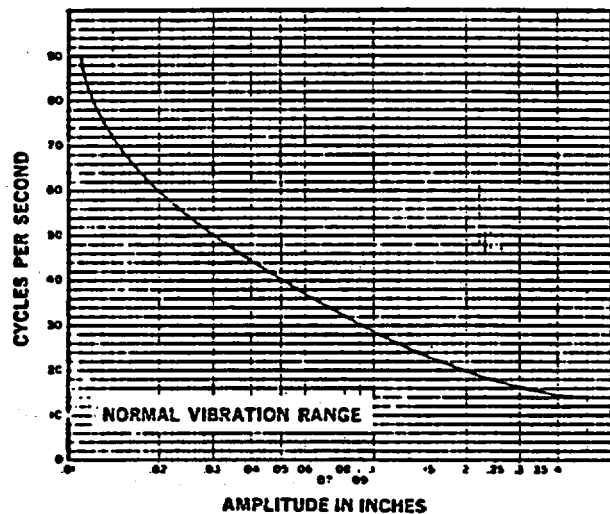

EN11

For the  $\frac{1}{2}$  inch, BW21-1H, Anaconda hose, the manufacturer recommends a minimum length of  $5\frac{1}{2}$  inches. The normal vibration range should have no detrimental effect on the life of hose assemblies with length greater than  $5\frac{1}{2}$  inches. The hose assembly used on the neutron shield tank system is 19 inches long. Severe shock will decrease the life of the hose assembly. The shock loads under normal conditions of transport are reported to be 3g maximum which is not considered to be a severe shock condition and should have no effect on the hose assembly.

To verify the structural integrity of the flexible metal hose assembly and end fittings, a test was performed on a mock-up of the hose assembly. The mock-up (see sketch on pg. XI-E6) consisted of two  $1\frac{1}{2}$  inch diameter rods which were machined to accept the Snap-Tite fittings. The flexible hose was assembled with Snap-Tite nipples on each end. The Snap-Tite fittings on the  $1\frac{1}{2}$  inch diameter rods were connected to the Snap-Tite fittings on the flexible hose. The test procedure was as follows:

1. The flexible line assembly shall be pressurized to 235 psig hydrostatic which is the neutron shield tank system design pressure.
2. The pressurized flexible line assembly shall be mounted in a tensile test machine and a gradual load applied to the assembly until there is either a visible indication of leakage (not pressure drop) or the testing machine has reached its limit of travel. The load at which the limiting condition

occurs shall be recorded. If failure occurs by leakage, the location of the leak and nature of failure shall be recorded.

**Test results:**

The pressurized flexible line assembly was mounted in the test machine. A gradual load was applied until the stainless steel wire braid, which covers the corrugated stainless steel tube, failed at one end of the flexible line assembly. At this point, there was no leakage from the flexible line assembly. The force required to break the wire braid outer covering was 4,301 pounds. With the wire braid outer covering broken, the inner corrugated stainless steel tube was free to elongate. The load on the flexible line assembly dropped off as a result of the free elongation of the inner corrugated stainless steel tube. As the test machine reached its limit of travel, a load of only 589 pounds could be developed. At this point in the test there still was no leakage from the flexible line assembly, and this assembly had been stretched approximately 10 inches beyond its original length. It was decided to stop the pull test and, with the assembly mounted in the machine, increase the hydrostatic pressure in the flexible line assembly. The pressure was increased in approximately 500 psi increments until the corrugated stainless steel tube ruptured. The tube ruptured at the same location the wire braid failed. The rupture pressure was 1,500 psig. There was no structural damage to the Snap-Tite coupling assem-

and no evidence of leakage.

**Conclusion:**

The flexible hose assembly can withstand a great amount of distortion along with over-pressurization without loss of neutron shield water.

Body  
S/S Type 304

Snap-Tite  
Quick-Disconnect  
Coupling

$\frac{1}{2}$ " NPT Fitting  
S/S Type 304  
Anaconda  $\frac{1}{2}$ " PMW4

Flexible Metal Hose  
S/S Type 321  
Anaconda  $\frac{1}{2}$ " BW-21-H

Note: Seal all threads  
with Perhacel #412 or  
equal


Shut-off  
Valve  
 $\frac{1}{4}$ " NPT

(XI-E6)

$\frac{1}{4}$ " NPT plug

30"  
(Approx.)

Pressure Gauge  
 $\frac{1}{4}$ " NPT

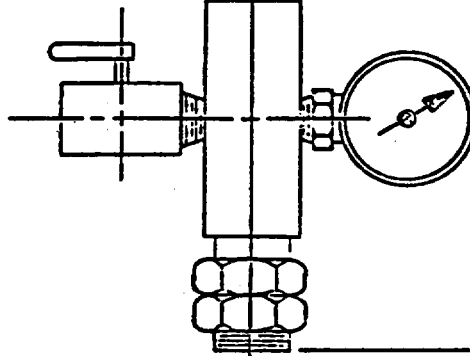

## APPENDIX F

### ANALYSIS OF SHELL BUCKLING IN BIG SIDE DROP

#### CONTENTS

1. 10/24 CASE AXIAL DIMENSIONS
2. CASE COMPONENT WEIGHTS
3. LOCATION AND MAGNITUDE OF MAXIMUM BENDING MOMENT
4. DISTRIBUTION OF BENDING MOMENT AMONG THE CASE SHELS
5. COMPUTATION OF MAXIMUM AXIAL COMPRESSIVE STRESS IN THE SHELS.
6. EVALUATION OF SHELL STABILITY.

#### REFERENCES

1. SAFETY ANALYSIS REPORT NLI 10/24  
SPENT-FUEL SHIPPING CASE, FEB. 1976  
REVISION.


X1-F:



ANALYSIS FOR SHELL BUCKLING UNDER SIG SIDE DROP


1.0 10/24 CAST ARIAL DIMENSIONS

(REF. 1, p II-3-59xxx)

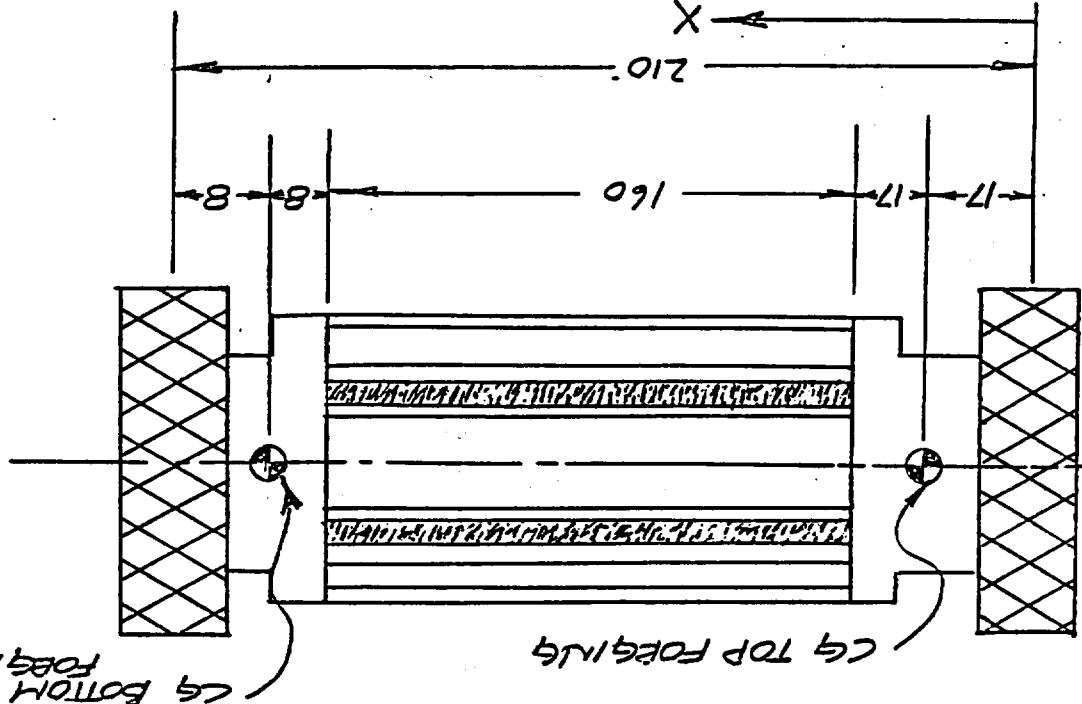

2.0 TABLE OF CAST COMPONENT WEIGHTS

2.1 WEIGHT OF PROTECTED WATER ABOVE OUTER SHELL.

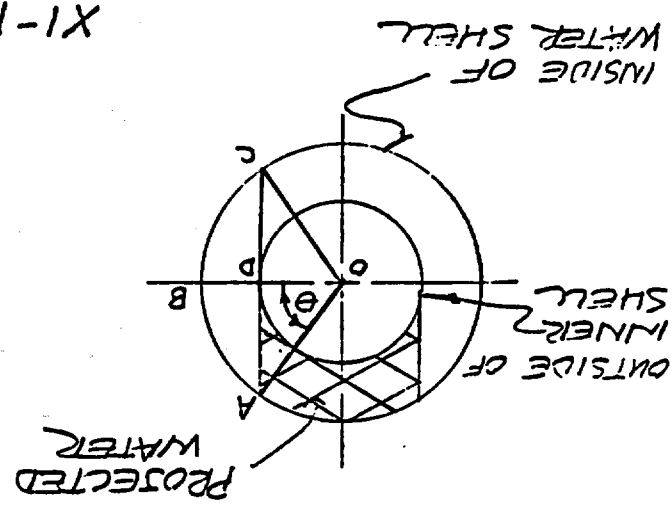

$$\theta = \cos^{-1} \frac{OA}{OD}$$

$$= \cos^{-1} \frac{40.25}{31.25}$$

$$\theta = 39.1^\circ$$

X1-F2

2.1

WEIGHT OF PROTECTED WATER ABOVE  
OUTER SHELL (CONT.)

AREA OF SECTOR  $OABC = A_{OBC}$

$$\Delta_{OAC} = \pi(40.25)^2 \left( \frac{360}{2 \cdot 39.1} \right) = 1105.11 \text{ m}^2$$

AREA OF TRIANGLE OAC

$$A_{OAC} = 31.25 \times 40.25 \sin(39.1^\circ)$$

$$= 793 \text{ MJ}^2$$

AREA OF SEGMENT  $ABC$

$$\Delta_{ABC} = A_{OABC} - A_{OAC}$$

$$= 312.4 \text{ m}^2$$

AREA OF ANNULUS BETWEEN THE SHELLS (TOTAL WATER AREA)

$$\Delta w = \pi(40.25^2 - 31.25^2) = 2022.14^2$$

AREA OF PROTECTED WATER

$$\Delta p_w = \frac{\Delta w - 2 A_{abc}}{2}$$

$$\frac{2022 - 2 + 312.4}{2} =$$

$$\underline{\underline{A_{PV} = 699\text{ IN}^2}}$$

TOTAL WEIGHT PROTECTED WATER

$$W_{FW} = 160 * A_{PW} * \delta_w$$

$$160 * 699 * 0.03611 = 4039.18.$$

X1-53

2.0 TABLE OF CASK COMPONENT WEIGHTS (CONT.)2.2 FORGING WEIGHTS

CONTENTS	34100. LB.
INNER SHELL	4880.
LEAD	64900.
OUTER SHELL & FINS	20163.
WATER	11676.
WATER SHELL & FINS	<u>16967.</u>
TOTAL	152686.

TOTAL CASK WEIGHT  
LESS IMPACT ABSORBERS = 195000 LB

## FORGING WEIGHT FOR ANALYSIS

$$W_F = 0.5 (195000 - 152686)$$

$$W_F = \underline{\underline{21160 \text{ LB.}}}$$

X1-F 4

2.0 TABLE OF CASE COMPONENT WEIGHTS (CONT)

REV: TRS 4 MAY 76


JHA-74-1C

$$\frac{5}{76}$$

DESCRIPTION	TOTAL WEIGHT (LB)	WEIGHT PER UNIT AXIAL LENGTH (LB/IN)
CONCRETE	34100	
INNER SHELL	4890	
LEAD	64900	
OUTER SHELL AND FINS	20163	
PROTECTED WATER	4039	
TOTAL OF COMPONENTS ON COMPOSITE	128080	800.5
WATER ON OUTER SHELL	7637	
WATER SHELL & FINS	16967	
TOTAL OF COMPONENTS ON WATER SHELL	24604	154.0
TOTAL WEIGHT LESS FORGINGS	152684	954.0
FORGINGS (EACH)	21160	
TOTAL WEIGHT OF ANALYZED STRUCTURE	195000	

XI-55

### 3.0 LOCATION AND MAGNITUDE OF MAXIMUM BENDING MOMENT

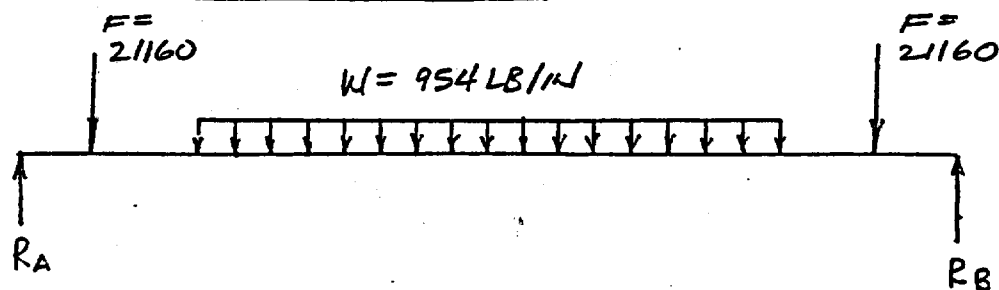


$$\sum M_A = (17 \times 21160) + (34 + 80)(195)(160) + \quad + M \quad \uparrow$$

$$(21160)(34 + 8 + 160) - R_B(210) = 0$$

$$R_B = 104929 \text{ LB.}$$

$$R_A = 195000 - 104929 = 90071 \text{ LB.}$$

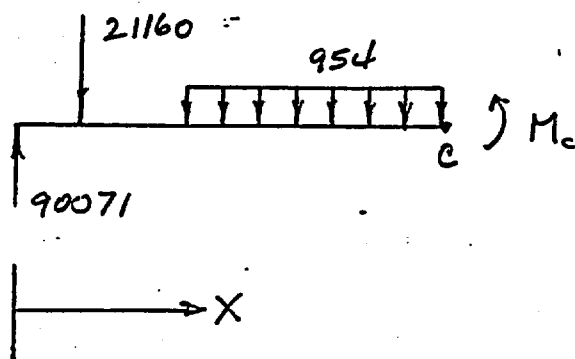

$$\sum M_c = M_c - R_A X + F(X - 17) + W(X - 34)\left(\frac{X - 34}{2}\right)$$

$$\frac{dM_c}{dX} = 0 = -R_A + F + W/X - 34W$$

$$= -90071 + 21160 + 954X - 32436$$

$$\underline{X = 106.2 \text{ IN. LOCATION OF MAX. MOMENT}}$$

TOTAL MOMENT @  $X = 106.2 \text{ IN.}$

$$0 = M_c - (90071)(106.2) + (21160)(106.2) - (21160)(17)$$


$$+ \left(\frac{954}{2}\right)(106.2)^2 - (34)(954)(106.2) + (578)(954)$$

$$\underline{M_c = 5.24 (10)^6 \text{ IN. LBS.}}$$

XI-F6

#### 4.0 DISTRIBUTION OF BENDING MOMENT AMONG THE CASK SHELLS

TO DETERMINE THE DIVISION OF THE TOTAL BENDING MOMENT TO THE INNER SHELL - LEAD - OUTER SHELL COMPOSITE AND TO THE WATER SHELL, A SMALL ANSYS MODEL WAS DEVELOPED. THE MODEL CONSISTED OF ELASTIC-PLASTIC PIPE ELEMENTS (ANSYS STIF 20). THE CASK WAS SIMULATED BY TWO CONCENTRIC PIPES AS SHOWN IN THE SKETCH BELOW, THE INNER PIPE REPRESENTING THE COMPOSITE AND THE OUTER PIPE REPRESENTING THE WATER SHELL.

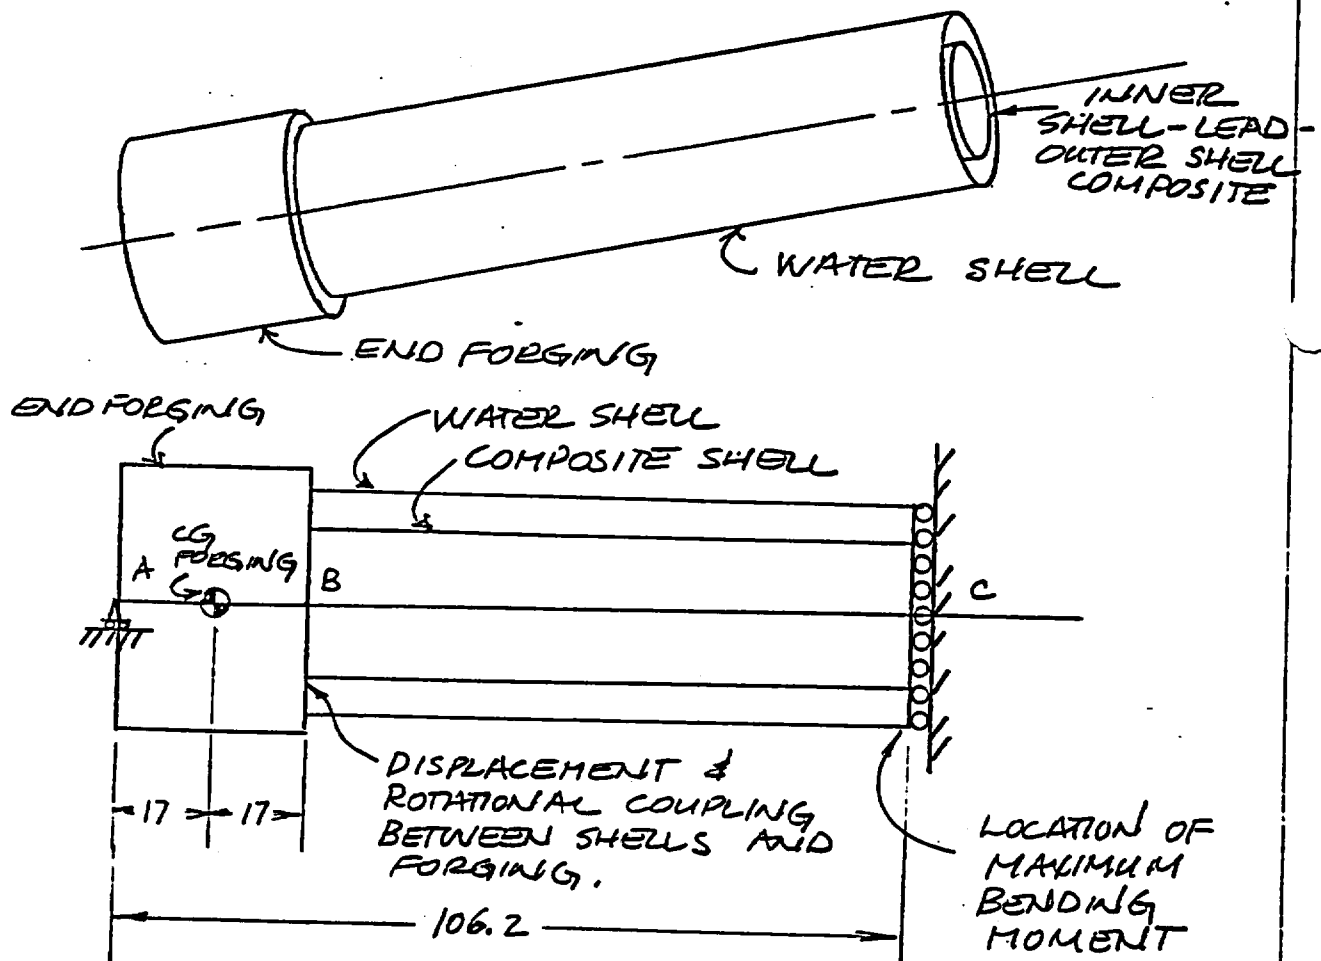

SKETCH NOT TO SCALE!

XI-F7

X1-F8

#### 4.0 DISTRIBUTION OF BENDING MOMENT AMONG THE CASE SHELLS (CONT.)

THE WALL THICKNESS OF THE ANSYS COMPOSITE SHELL WAS SELECTED TO YIELD THE TOTAL BENDING INERTIA,  $I_{TOTAL}$ . THEREFORE,

$$I_c = \frac{\pi}{4} (31.25^4 - 26^4) = 2.023 \times 10^5$$

$$R_L = 28.9 \text{ m.}$$

THE WATER SHELL WAS ASSUMED TO BE SIMPLY A 0.75 IN. THICK SHELL WITH O.D. = 41.0 IN, I.E., THE FINS WERE NEGLECTED IN THE SHELL'S STIFFNESS. THIS IS A CONSERVATIVE ASSUMPTION SINCE THE SECOND-ORDER STIFFENING OF THE WATER SHELL BY THE FINS WOULD ENABLE THE SHELL TO SUPPLY MORE RESISTING MOMENT AT POINT B, AND THUS REDUCE THE LOAD ON THE COMPOSITE SHELL.


THE MATERIAL PROPERTIES ASSUMED WERE THAT OF STAINLESS-STEEL AT 400°F. THE ANSYS BI-LINEAR VERSION OF THESE PROPERTIES IS GIVEN IN FIG. 1.

THE LOADING ON THE MODEL CONSISTED OF THE 1G WEIGHTS COMPUTED ABOVE, 800 LB/IN. ON THE COMPOSITE SHELL, 154.0 LB/IN. ON THE WATER SHELL, AND 21160 LB. FOR THE FORGING. THE BENDING MODEL WAS THEN SUBJECTED TO 81G VERTICAL ACCELERATION. ADDITIONAL LOADS IMPOSED CONSISTED OF 235 PSI IN THE WATER CHAMBER AND A 600 PSI SIMULATION OF THE LEAD PRESSURE ON THE COMPOSITE SHELL. FURTHER, A THERMAL STRESS RESULTING FROM THE APPROXIMATE 30°F TEMPERATURE DIFFERENCE BETWEEN THE SHELLS WAS IMPOSED.



4.0 DISTRIBUTION OF BENDING MOMENT ANALYSIS  
 CASE SHELLS (CONT.)

FIGURE 1. STRESS-STRAIN CURVE USED FOR 304 STAINLESS STEEL IN BIG SIDE DROP CALCULATIONS.

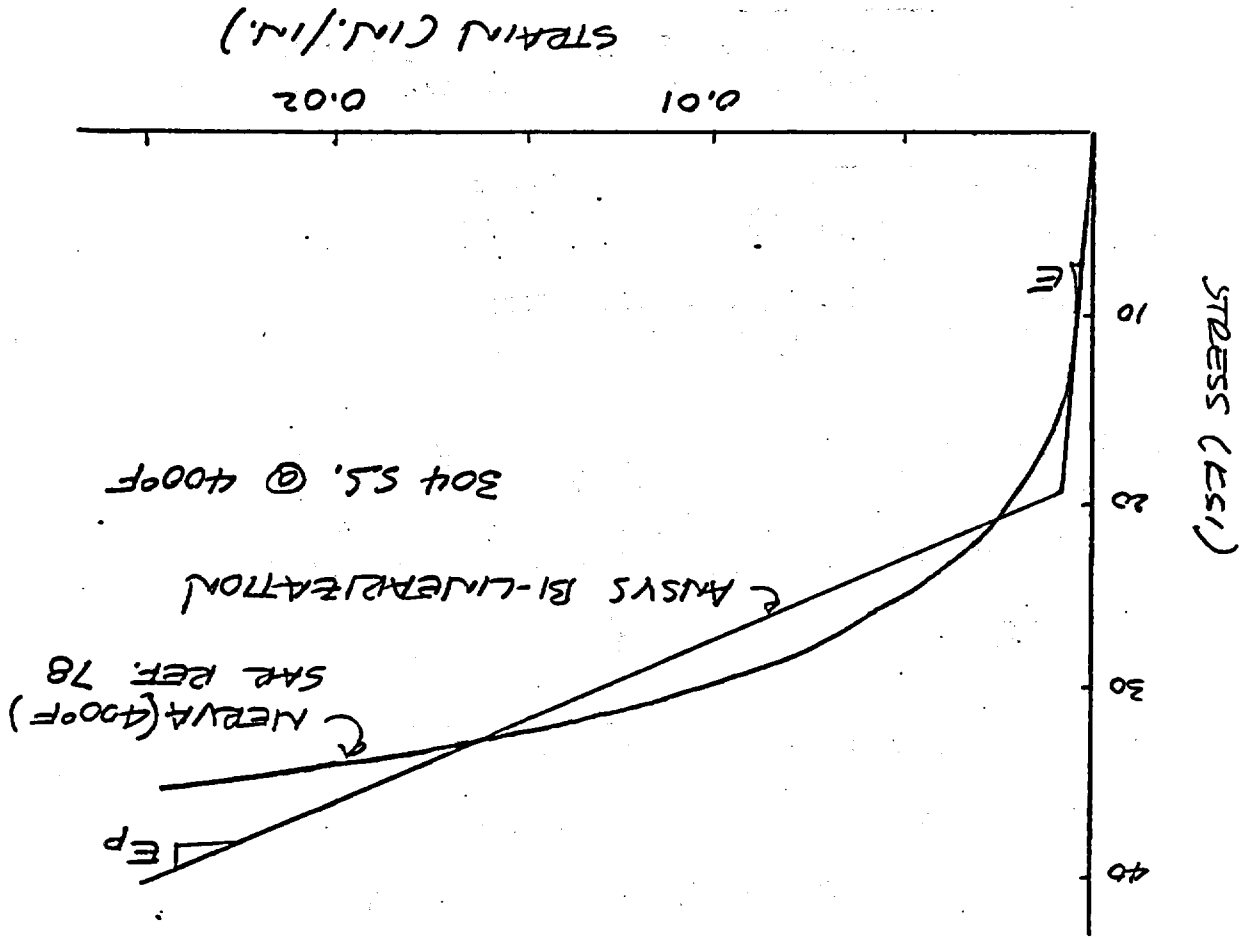

ANALYSIS BI-LINEAR STRESS-STRAIN CURVE FOR SIDE - DROP CALCULATION

T (°F)	$\sigma_y$ (psi)	$E_p/E$
200	18000	0.0315
300	18000	0.0321
400	18000	0.0327
500	18000	0.0337

XI-F10

#### 4.0 DISTRIBUTION OF BENDING MOMENT AMONG THE CASE SHELLS (CONT.)

THE RESULTS OF THE ANSYS CALCULATION INDICATE THAT THE BENDING MOMENTS ARE DISTRIBUTED AS FOLLOWS:

COMPOSITE:  $M_{cs} = 2.67 (10)^8$  IN-LBS.

WATER SHELL:  $M_{ws} = 1.55 (10)^8$  IN-LBS.

THE TOTAL MOMENT FROM THIS COMPUTATION IS THEREFORE

$$M_T = 4.22 (10)^8 \text{ IN. LBS.}$$

THIS TOTAL MOMENT IS SLIGHTLY SMALLER THAN THAT COMPUTED BY HAND CALCULATION OF  $4.24 (10)^8$  IN. LBS. ADJUSTING THE INDIVIDUAL SHELL MOMENTS, THE FINAL RESULTS ARE:

$$\underline{M_{cs} = 2.68 (10)^8 \text{ IN. LBS.}}$$

$$\underline{M_{ws} = 1.56 (10)^8 \text{ IN. LBS.}}$$

#### 5.0 COMPUTATION OF MAXIMUM AXIAL COMPRESSIVE STRESS IN THE INNER AND OUTER SHELL

USING THE SMALL AXISYMMETRIC ANSYS MODEL OF THE CENTER PLANE OF THE CASE (REF. 1, p XI-3-58) THE STRESS-STATE OF THE 70KN 130°F AMB. NORMAL CONDITION WAS FIRST DETERMINED. THEN, IN ADDITION TO THIS LOADING, AXISYMMETRIC AXIAL DISPLACEMENTS WERE IMPOSED IN SMALL INCREMENTS UP TO THE AXIAL STRAIN LEVELS EXPECTED IN THE BIG SIDE DROP. BOTH TENSILE AND COMPRESSIVE SOLUTIONS WERE EXAMINED. THE STRESS-STRAIN CURVE OF FIG. 1 WAS ALSO USED IN THIS CALCULATION. THE LEAD STRESS-STRAIN CURVES OF REF. 1, FIG. 4.9.6-13 (a) & (b) WERE USED. THE RESULTS OF THESE AXIAL STRAIN CASES ARE PRESENTED IN FIGS. 2 & 3.

XI-F11


U.S. GOVERNMENT PRINTING OFFICE: 1975

REV. TFS 4 MAY 76

JHA-74-1C


5/76

FIGURE 2

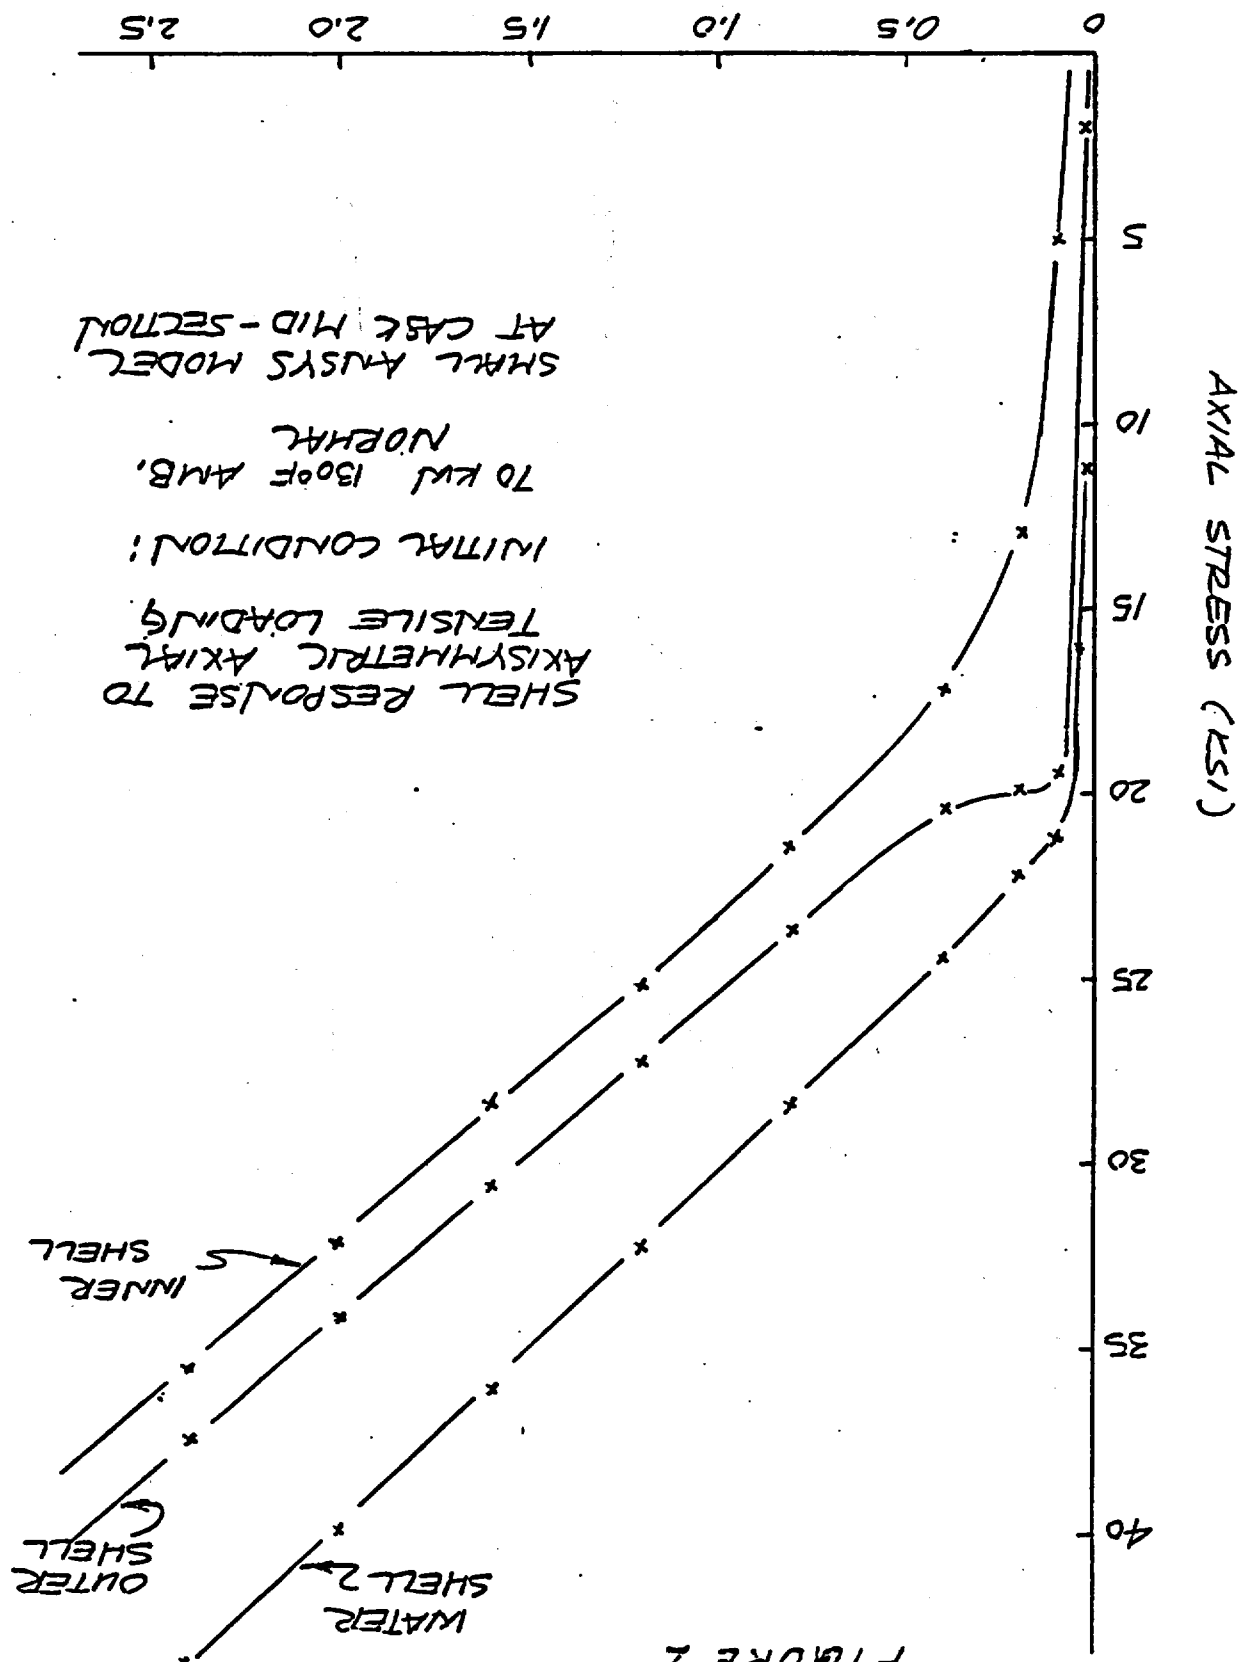

X1-F12

FIGURE 3

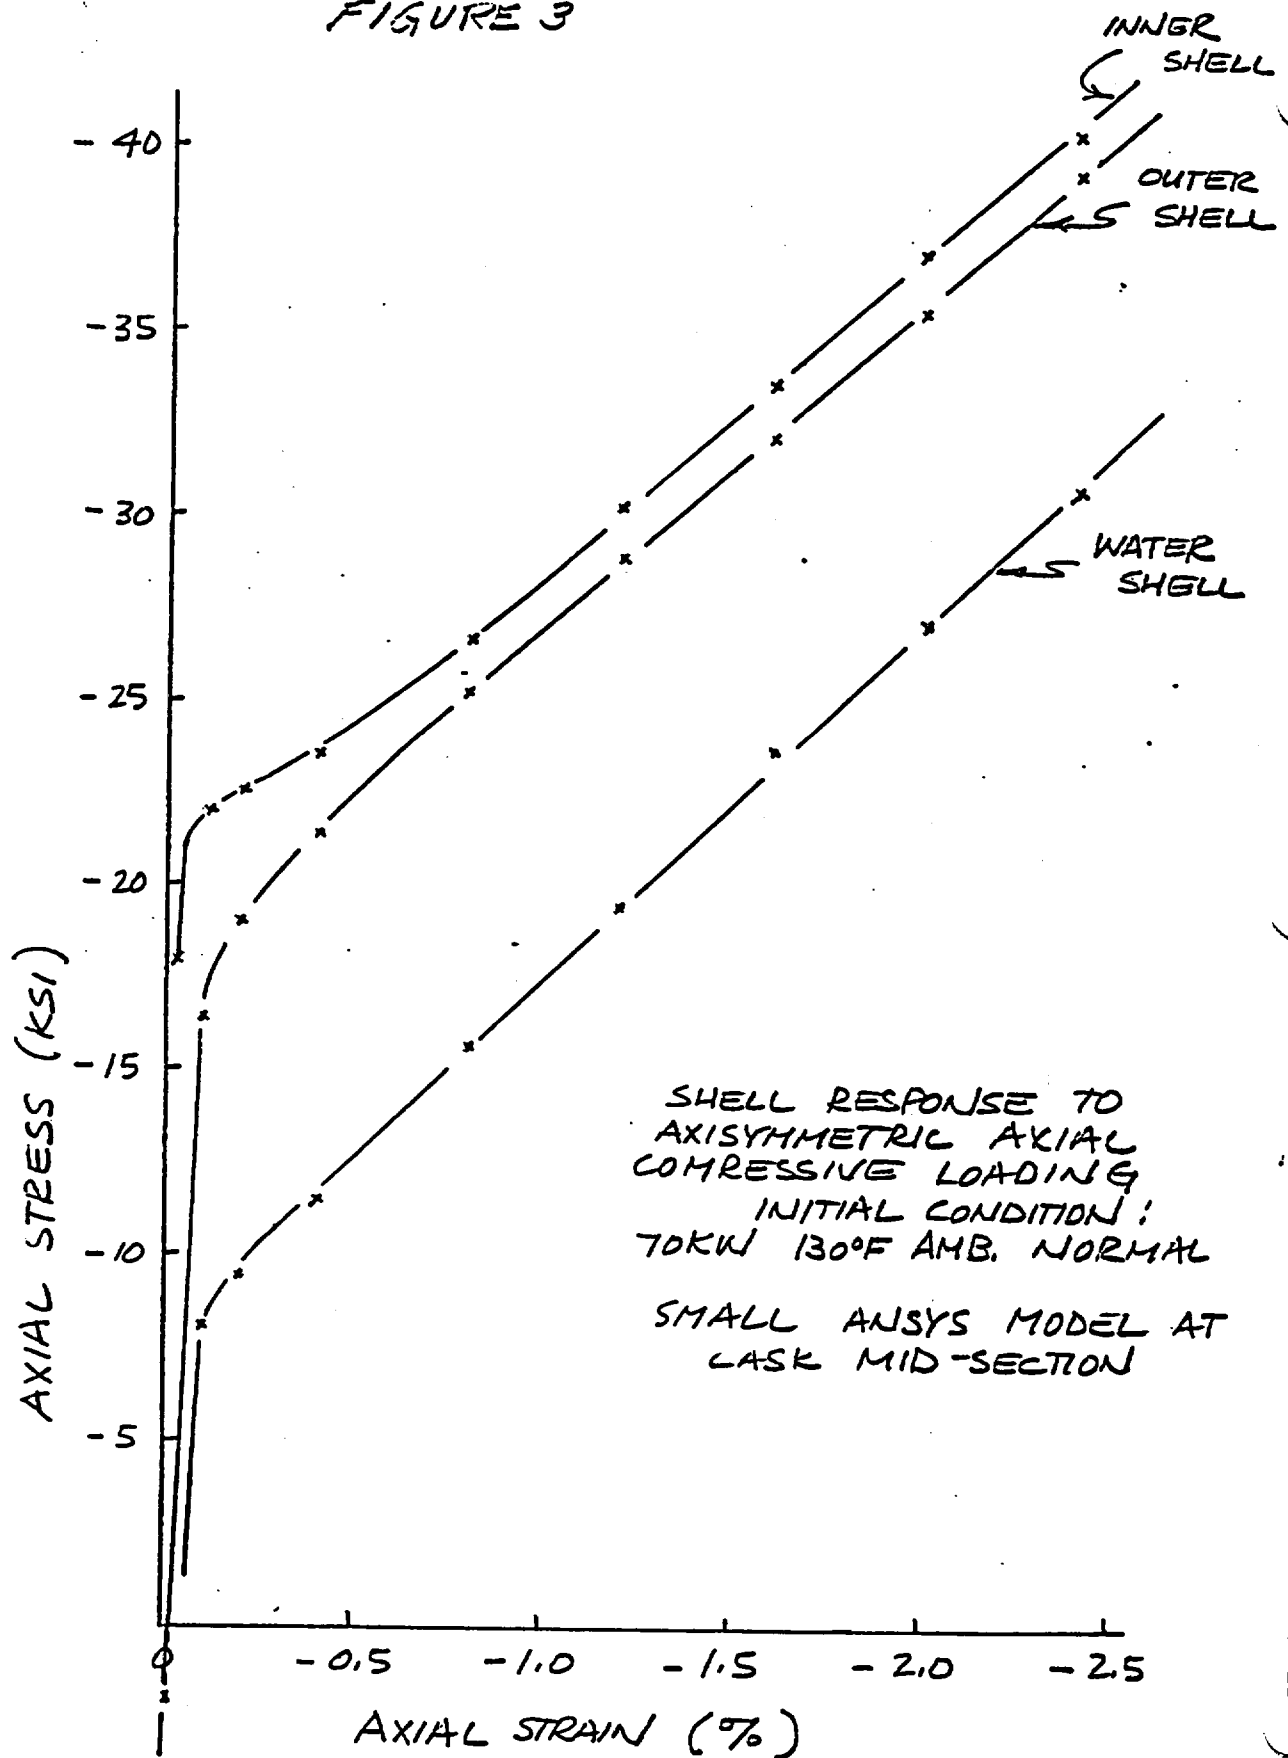


X1-F/3

	42-381	50 SHEETS	\$ SQUARE
	42-382	100 SHEETS	\$ SQUARE
	42-389	300 SHEETS	\$ SQUARE

THIS APPROXIMATE INTEGRATION WAS COMPLETED BY FIRST DIVIDING A SYMMETRIC HALF OF THE CASK INTO EIGHT EQUAL CIRCUMFERENTIAL SEGMENTS AS SHOWN BELOW. THE STRAINS AND STRESS WERE THEN COMPILED FOR EACH SEGMENT FOR EACH ASSUMED RADII OF CURVATURE. THE STEPS OF THE INTEGRATION

THE RESULTS OF THE INTEGRATION WERE NEXT PLOTTED IN FIGS. 4 & 5. THESE FIGURES SHOW THE MOMENT IN THE COMPOSITE AND WATER SHELL VS. CENTER-LINE RADIUS OF CURVATURE.

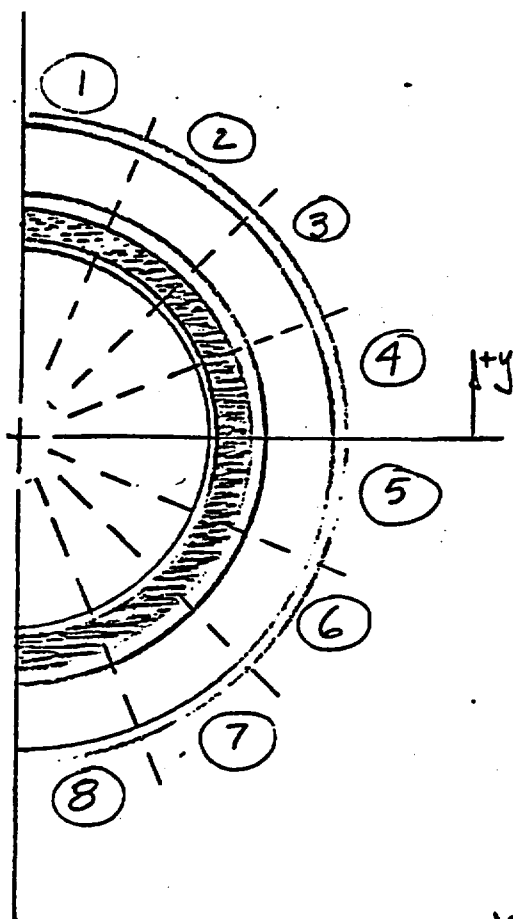

X1-F14

BENDING MOMENT COMPUTATIONS

$R_c = 1600 \text{ IN.}$

$\text{INITIAL AXIAL STRAIN} = -0.000097 \text{ IN/IN}$

SHELL & LOC.	y (IN.)	TOTAL STRAIN IN./IN.	STRESS (KSI)	INCREMENTAL MOMENT (-) IN-LBS
INNER				
1	24.44	-0.01537	-34.2	5.63 (10) <sup>6</sup>
2	19.02	-0.01198	-30.2	3.87
3	12.71	-0.00804	-26.8	2.29
4	4.46	-0.00289	-23.0	0.691
5	-4.46	0.00269	14.8	0.445
6	-12.71	0.00785	21.2	1.82
7	-19.02	0.01179	25.1	3.22
8	-24.44	0.01518	27.8	4.58
				$\Sigma 2.25 (10)^7$
OUTER				
1	29.67	-0.0186	-34.2	2.41 (10) <sup>7</sup>
2	25.15	-0.0158	-33.0	1.97
3	16.81	-0.0106	-27.6	1.10
4	5.90	-0.00378	-21.3	0.299
5	-5.90	0.00359	20.2	0.283
6	-16.81	0.0104	25.7	1.03
7	-25.15	0.0156	30.3	1.81
8	-29.67	0.0195	32.8	2.31
				$\Sigma 11.21 (10)^7$
WATER				
1	39.85	-0.0250	-31.8	1.52 (10) <sup>7</sup>
2	33.78	-0.0212	-28.2	1.14
3	22.57	-0.0142	-21.3	0.575
4	7.93	-0.00505	-13.0	0.123
5	-7.93	0.00486	25.3	0.296
6	-22.57	0.0140	34.0	0.918
7	-33.78	0.0210	40.6	1.64
8	-39.85	0.0248	44.8	2.10
				$\Sigma 8.31 (10)^7$

TOTAL SUM FOR THREE FULL  
SHELLS

$\bar{M} = 4.35 (10)^8 \text{ IN-LBS}$

X1-F15

BENDING MOMENT COMPUTATIONS

$R_c = 1800 \text{ IN.}$

INITIAL AXIAL STRAIN =  $-0.000097 \text{ IN/IN}$

SHELL # LOC.	Y (IN.)	TOTAL STRAIN IN./IN.	STRESS (KSI)	INCREMENTAL MOMENT (-) IN-LBS
INNER				
1	24.44	-0.01367	-30.8	5.07 (10) <sup>6</sup>
2	19.02	-0.01066	-28.6	3.66
3	12.71	-0.00716	-26.0	2.23
4	4.46	-0.00257	-22.7	0.682
5	-4.46	0.00238	14.2	0.427
6	-12.71	0.00696	20.2	1.73
7	-19.02	0.01047	23.8	3.05
8	-24.44	0.01348	26.2	4.31
				$\Sigma 21.12 (10)^7$
OUTER				
1	29.67	-0.01658	-32.7	2.31 (10) <sup>7</sup>
2	25.15	-0.01407	-30.5	1.82
3	16.81	-0.00944	-26.2	1.05
4	5.90	-0.00337	-20.6	0.289
5	-5.90	0.00318	20.2	0.283
6	-16.81	0.00924	24.8	0.990
7	-25.15	0.01388	29.0	1.73
8	-29.67	0.01639	31.0	2.19
				$\Sigma 10.6 (10)^7$
WATER				
1	39.85	-0.02224	-29.5	1.41 (10) <sup>7</sup>
2	33.79	-0.01896	-25.8	1.04
3	22.57	-0.01264	-20.0	0.540
4	7.93	-0.00450	-12.2	0.116
5	-7.93	0.00431	24.8	0.235
6	-22.57	0.01244	33.5	0.904
7	-33.78	0.01867	38.5	1.56
8	-39.85	0.02204	41.6	1.98
				$\Sigma 7.79 (10)^7$

TOTAL SUM FOR THREE FULL SHELLS

$\bar{M} = 4.10 (10)^8 \text{ IN-LBS}$

X1-F16

APPROVED FOR CONSTRUCTION  
DATE: 10/15/85  
BY: [Signature]

BEADING MOMENT COMPUTATIONS

$R_c = 2031.5 \text{ N.I.}$   
INITIAL AXIAL STRAIN  $= -0.00097 \text{ IN/IN}$

SHELL & LOC. y TOTAL STRAIN IN/IN STRESS (KSI) INCREMENTS INCREMENTS

IN-LBS  
(-)

INNER

1	24.44	-0.01210	-30.2	4.98(10) <sup>5</sup>
2	19.02	-0.00946	-27.8	3.57
3	12.71	-0.00635	-25.5	2.19
4	4.46	-0.00229	-22.8	0.686
5	-4.46	0.00210	13.6	0.409
6	-12.71	0.00616	19.6	1.68
7	-19.02	0.00927	22.3	2.86
8	-24.44	0.01190	25.0	4.12

OUTER

1	29.67	-0.01470	-31.0	2.19(10) <sup>7</sup>
2	25.15	-0.01248	-29.0	1.73
3	16.81	-0.00837	-25.8	1.03
4	5.90	-0.00300	-20.4	0.286
5	-5.90	0.00281	20.1	0.282
6	-16.81	0.00818	22.0	0.879
7	-25.15	0.01228	25.2	1.51
8	-29.67	0.01451	29.4	2.07

WATER

1	39.85	-0.01971	-26.8	1.28(10) <sup>7</sup>
2	33.78	-0.01673	-23.8	0.962
3	22.57	-0.01121	-18.6	0.502
4	7.93	-0.00400	-11.5	0.109
5	-7.93	0.00381	24.5	0.232
6	-22.57	0.01101	31.1	0.840
7	-33.78	0.01653	36.3	1.47
8	-39.85	0.01952	39.3	1.87

TOTAL SUM FOR THREE FULL SHELLS


$M = 3.86(10)^8 \text{ IN-LBS}$

XI-F/17




### 5.0 COMPUTATION OF MAXIMUM AXIAL COMPRESSIVE STRESS IN THE INNER AND OUTER SHELLS. (CONT.)

FIGURE 4. COMPOSITE SHELLS & RADII OF CURVATURE VS. BENDING MOMENT.

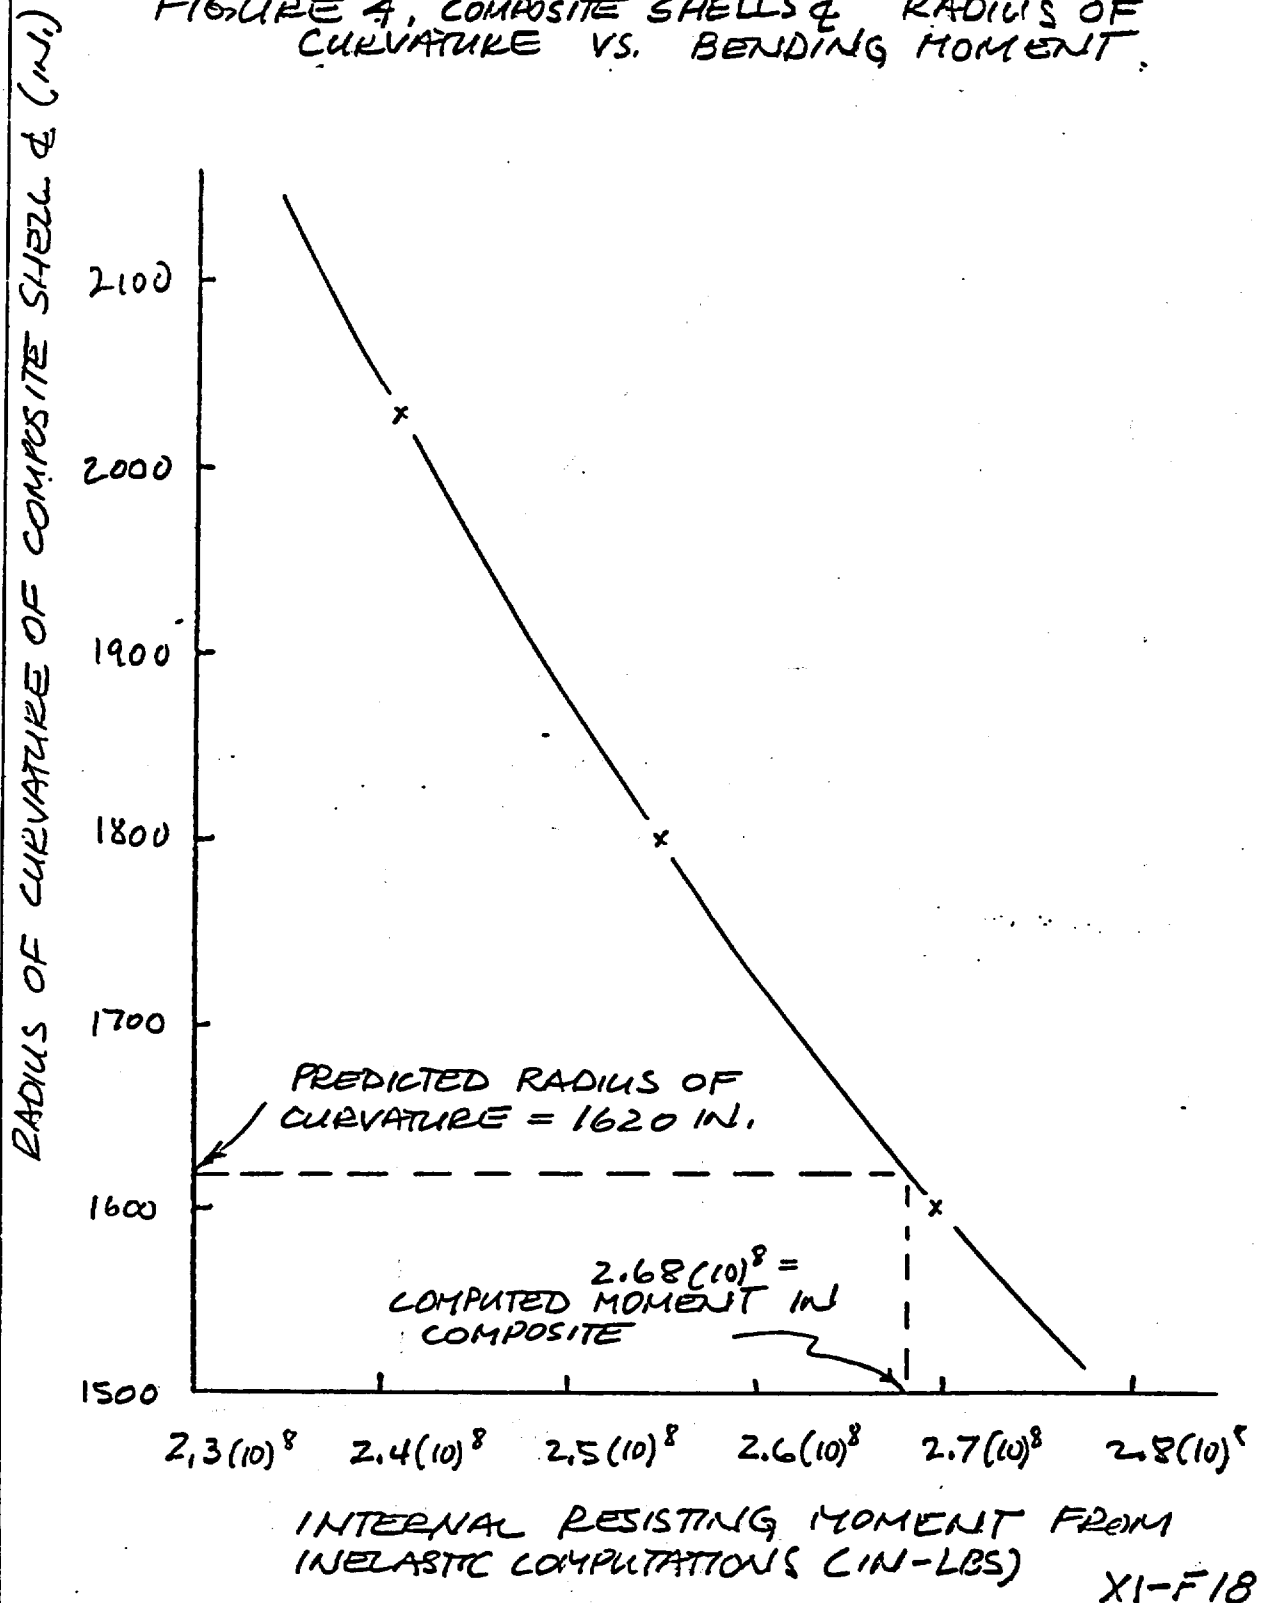

# 5.0 COMPUTATION OF MAXIMUM COMPRESSIVE STRESSES IN THE SHELLS. (CONT.)

## FIGURE 5. WATER SHELL & RADIUS OF CURVATURE VS. BENDING MOMENT

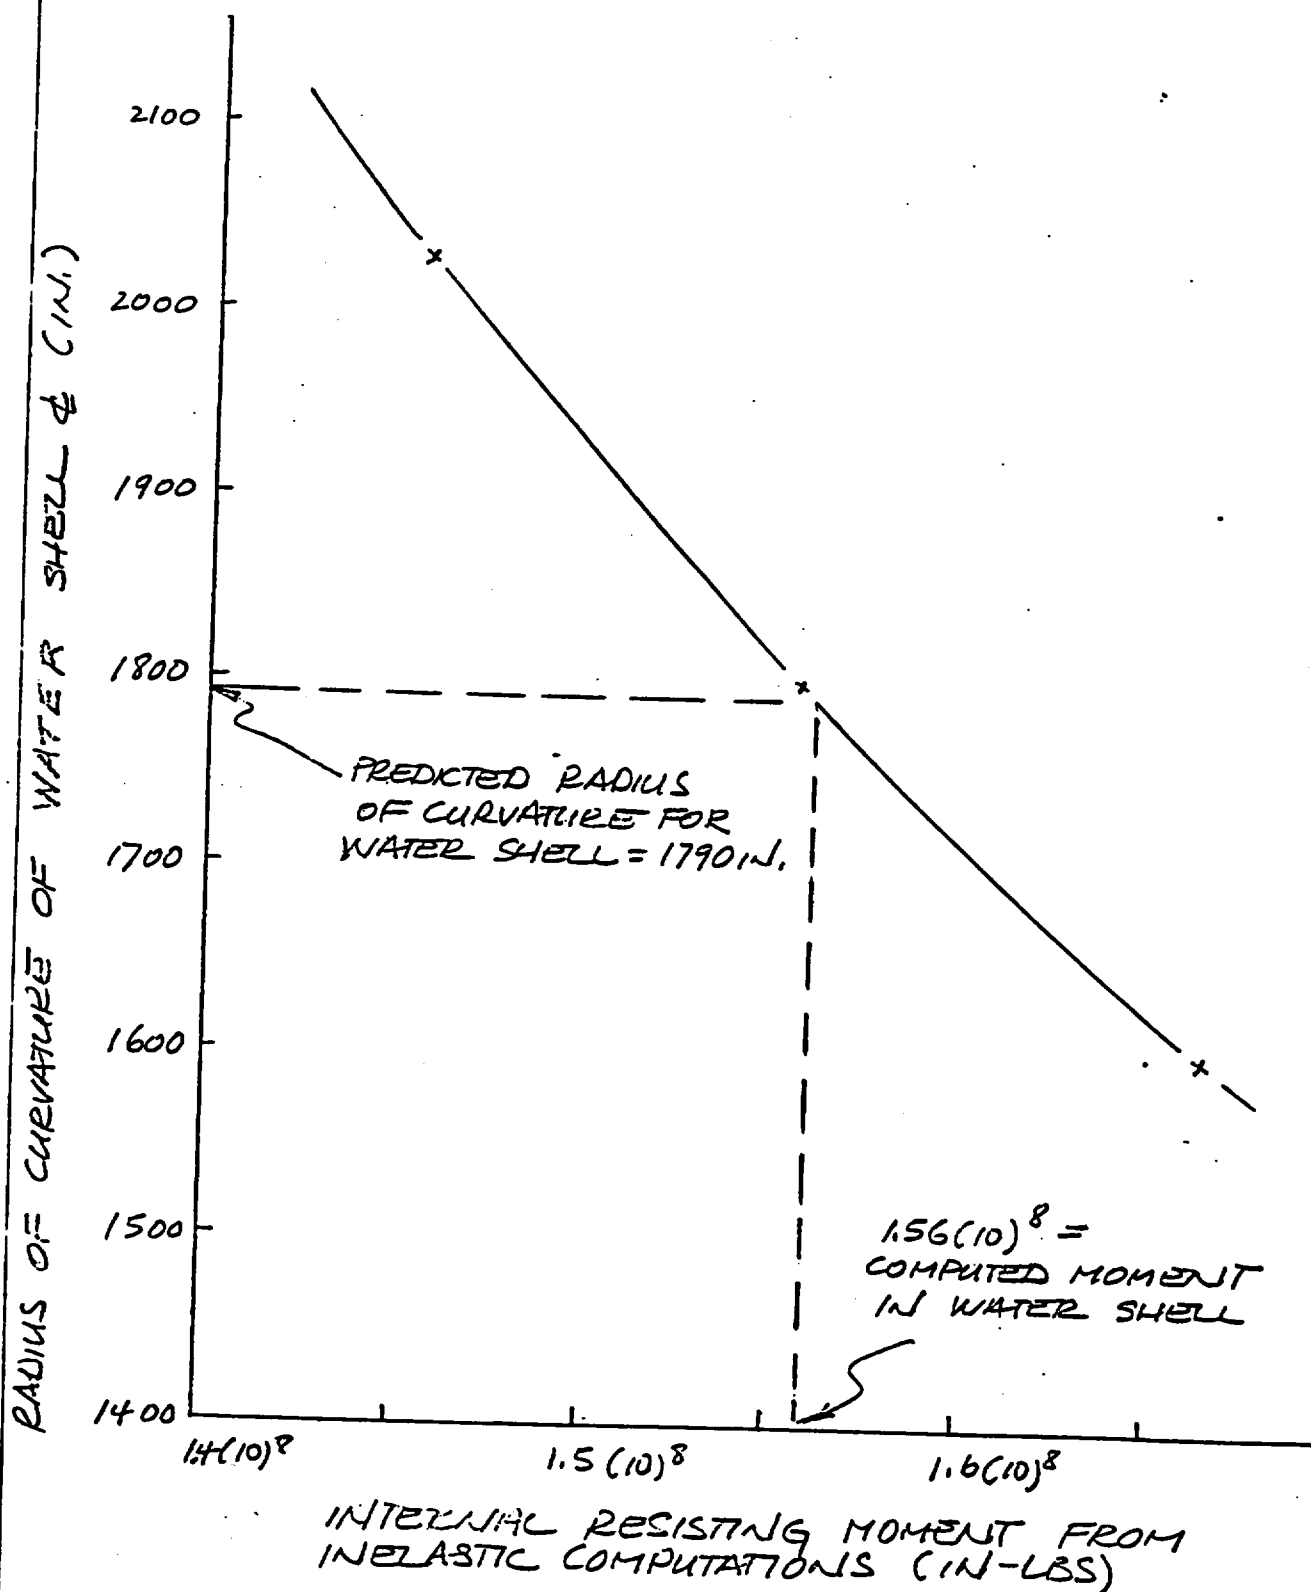

XI-F19

## 5.0 COMPUTATION OF MAXIMUM AXIAL COMPRESSIVE STRESS IN THE INNER SHELL AND OUTER SHELL. (CONT.)

FOR THE INNER SHELL - LEAD - OUTER SHELL COMPOSITE, FIG 4 SHOWS THE COMPUTED RADIUS OF CURVATURE TO BE 1620 IN. FROM TABLE 2 THE MAXIMUM COMPRESSIVE STRESSES IN THE SHELLS ARE THEREFORE COMPUTED TO BE APPROXIMATELY:

INNER SHELL,  $\sigma_x = -34,200$  PSI  
OUTER SHELL,  $\sigma_x = -34,200$  PSI

FOR THE WATER SHELL THE RADIUS OF CURVATURE IS SHOWN TO BE 1790 IN. IN FIG. 5, TABLE 3 YIELDS THE MAXIMUM COMPRESSIVE STRESS IN THE WATER SHELL TO BE APPROXIMATELY:

WATER SHELL,  $\sigma_x = -29500$  PSI

## 6.0 EVALUATION OF SHELL STABILITY

THE BUCKLING CALCULATION FOR THE AXIALLY LOADED COMPOSITE OF REF. 1, P. XI-4-121mm, WAS REPEATED USING SLIGHTLY CORRECTED INPUT VALUES. IN THE COMPUTATION THE DEFORMATION FORMULATIONS OF REF. 1 APPENDIX C WAS USED. THE INPUT TO BUCKLING COMPUTATION IS SHOWN IN TABLE 5. IN THE COMPUTATION THE AXIAL HALF-WAVE-LENGTH AND THE NUMBER OF CIRCUMFERENTIAL WAVES WAS VARIED TO INSURE THE MINIMUM CRITICAL STRESS WAS FOUND,

THE RESULTS OF THE BUCKLING EVALUATION INDICATE THAT THE CRITICAL AXIAL STRESS IS 39.7 KSI, AND CORRESPONDS TO AN AXISYMMETRIC MODE WITH AXIAL HALF-WAVE-LENGTH OF 9.0 IN.

REFERENCE 1, P. XI-4-12122 & 12123 INDICATES THE WATER SHELL IS NOT UNSTABLE DUE TO BUCKLING AT A COMPRESSIVE STRESS OF THE COMPUTED VALUE OF  $\sigma_x = -29500$  PSI. THE INDICATED CRITICAL STRESS FOR AXIAL BUCKLING IS -39200 PSI.

XI-F 20

DUE TO USE OF STATIC PROPERTIES FOR THE LEAD, THE BUCKLING COMPUTATION ABOVE IS VERY CONSERVATIVE, I.E. IF DYNAMIC STIFFENING FOR THE LEAD WAS ASSUMED, THE PREDICTED CRITICAL BUCKLING VALUE WOULD BE INCREASED SIGNIFICANTLY.

(2) & (3) SEE NOTES REF. 1 PP. XI-4-12 mm & in.

NOTES (1) THE AXIAL LOAD IN THE SHELS WAS TAKEN AS THE LOADING PARAMETER.

HOOP STRESS	AXIAL STRESS	RADIAL STRESS	TEMPERATURE ASSUMED FOR PROPERTIES	TANGENT SLOPE	SECANT SLOPE
-18200	-P(1)	-300.	400°F	EMPIRICAL CURVE	EMPIRICAL CURVE
-600.	-810	-600.	450°F	(3) 2000 PSI	(3) 10000 PSI
7250.	-P(1)	-420.	400°F	EMPIRICAL CURVE	EMPIRICAL CURVE
OUTER SHELL	LEAD	INNER SHELL			

6.0 EVALUATION OF SHELL STABILITY  
TABLE 5. PARAMETERS OF BUCKLING COMPUTATION

**THIS PAGE INTENTIONALLY LEFT BLANK**

## APPENDIX G

BUCKLING UNDER PUNCTURE TEST CONDITIONSLEAD PRESSURE DUE TO 800 PSI WATER PRESS.

THE SMALL AXISYMMETRIC ANSYS MODEL OF THE CASK SHELLS (SEE SAR P. XI-3-58) WAS USED TO DETERMINE THE STATE OF STRESS AND STRAIN IN THE CASK FOR THE NORMAL CONDITIONS OF TRANSPORT, 70 KW, 130°F A4B WITH 800 PSI IN THE WATER CHAMBER. THIS CASE SIMULATED THE AXISYMMETRIC PART OF THE PIN-PUNCTURE LOADING. THE STRESS-STRAIN CURVES OF SAR, FIG. 3.8.3-11 FOR STAINLESS-STEEL AND SAR, FIG. 4.9.6-13(a) & (b) FOR LEAD WERE USED IN THIS COMPUTATION. THE LEAD PRESSURE RESULTING FROM THIS COMPUTATION WAS 732 PSI. (THIS IS THE SAME COMPUTATION PRESENTED AT THE NLI-NRC MEETING OF 15 APRIL '76.)

TO INCLUDE THE AXIAL STRESSES THAT RESULT FROM THE 7.07G LATERAL LOAD OF THE PIN-PUNCTURE, THE METHOD AND DATA FROM THE 81G, 30FT. SIDE-DROP EVALUATION PRESENTED AT THE NLI-NRC 15 APRIL MEETING WAS USED. THE APPROACH WAS TO ASSUME SOME LARGE RADIUS OF CURVATURE FOR THE CASK CENTER-LINE AND THEN TO COMPUTE THE RESULTING INTERNAL MOMENT. THE RADIUS OF CURVATURE ASSUMED WAS 8000 IN. AND THE RESULTING MOMENT WAS  $2.68(10)^8$  IN-LBS. TABLE 1 PRESENTS THIS COMPUTATION. THE REQUIRED MOMENT FOR THE 7.07G LOADING IS APPROXIMATELY  $3.7(10)^7$  IN-LBS. THEREFORE, THE STRESSES RESULTING FROM THE ASSUMED 8000 IN. RADIUS ARE CONSERVATIVE. THE AXIAL COMPRESSIVE STRESSES DEVELOPED FROM THIS COMPUTATION ARE:

INNER SHELL  $\sigma_x = -23000 \text{ psi}$

OUTER SHELL  $\sigma_x = -21200 \text{ psi}$

XI-G1

# BUCKLING UNDER THE PUNCTURE TEST CONDITIONS (CONT.)

## BUCKLING CALCULATION

THE BUCKLING CALCULATION FOR THE CASK SHELLS UNDER 70KW 130°F NORMAL, 800 PSI WATER CHAMBER AND > 7.07G AXIAL COMPRESSIVE LOADS WAS COMPLETED USING THE THEORETICAL DEVELOPMENT OF SAR SECTION XI, APPENDIX C. THE ISOTROPIC MODULI DETERMINATION WAS USED FOR THE LEAD IN THIS EVALUATION. THE PARAMETERS OF THE BUCKLING SOLUTION ARE GIVEN BELOW:

	INNER	LEAD	OUTER
HOOP STRESS (PSI)	$-P \times 22.9/0.75$	$-P^{(1)}$	$(P-800) \times 30.25/2.0$
AXIAL STRESS	$-23000^{(2)}$	$-P$	$-21200$
RADIAL STRESS	$-P/2.0$	$-P$	$-(P+800)/2.0$
TEMPERATURE	413°F	400°F	350°F
TANGENT SLOPE	EMPIRICAL <sup>(3)</sup> CURVE	1400 PSI <sup>(4)</sup>	EMPIRICAL <sup>(3)</sup> CURVE

### NOTES:

- (1) THE LEAD PRESSURE WAS CONSIDERED THE LOADING PARAMETER.
- (2) ANSYS RESULTS FOR SMALL MODEL AND BENDING CALCULATIONS DESCRIBED ABOVE
- (3) SEE NOTE 3, SAR P. XI-3-59 a
- (4) SEE NOTE 3, SAR P. XI-3-59 a

IN THE BUCKLING SOLUTION, THE NUMBER OF CIRCUMFERENTIAL WAVES AND THE NUMBER OF AXIAL WAVES WAS VARIED TO INSURE THAT A MINIMUM VALUE OF CRITICAL PRESSURE WAS FOUND.

THE CRITICAL PRESSURE WAS FOUND TO BE 810 PSI @ AXIAL HALF WAVE LENGTH OF 160 IN. AND 6 CIRCUMFERENTIAL WAVES.

BUCKLING UNDER THE PUNCTURE TEST  
CONDITIONS (CONT.)

---

ALTHOUGH THIS EXACT ANALYSIS  
WAS NOT REPEATED USING THE DEFORMATION  
MODULI FORMULATION OF THE BUCKLING THEORY,  
THE RESULTS OF SIMILAR DEFORMATION THEORY  
CALCULATIONS SHOW THE CRITICAL STRESS IS  
INCREASED BY A SIGNIFICANT FACTOR OVER  
THE COMPARABLE ISOTROPIC THEORY CALCULATION.

40-507 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1041 1042 1043 1044 1045 1046 1047 1048 1049 1050 1051 1052 1053 1054 1055 1056 1057 1058 1059 1060 1061 1062 1063 1064 1065 1066 1067 1068 1069 1070 1071 1072 1073 1074 1075 1076 1077 1078 1079 1080 1081 1082 1083 1084 1085 1086 1087 1088 1089 1090 1091 1092 1093 1094 1095 1096 1097 1098 1099 1100 1101 1102 1103 1104 1105 1106 1107 1108 1109 1110 1111 1112 1113 1114 1115 1116 1117 1118 1119 1120 1121 1122 1123 1124 1125 1126 1127 1128 1129 1130 1131 1132 1133 1134 1135 1136 1137 1138 1139 1140 1141 1142 1143 1144 1145 1146 1147 1148 1149 1150 1151 1152 1153 1154 1155 1156 1157 1158 1159 1160 1161 1162 1163 1164 1165 1166 1167 1168 1169 1170 1171 1172 1173 1174 1175 1176 1177 1178 1179 1180 1181 1182 1183 1184 1185 1186 1187 1188 1189 1190 1191 1192 1193 1194 1195 1196 1197 1198 1199 1200 1201 1202 1203 1204 1205 1206 1207 1208 1209 1210 1211 1212 1213 1214 1215 1216 1217 1218 1219 1220 1221 1222 1223 1224 1225 1226 1227 1228 1229 1230 1231 1232 1233 1234 1235 1236 1237 1238 1239 1240 1241 1242 1243 1244 1245 1246 1247 1248 1249 1250 1251 1252 1253 1254 1255 1256 1257 1258 1259 1260 1261 1262 1263 1264 1265 1266 1267 1268 1269 1270 1271 1272 1273 1274 1275 1276 1277 1278 1279 1280 1281 1282 1283 1284 1285 1286 1287 1288 1289 1290 1291 1292 1293 1294 1295 1296 1297 1298 1299 1300 1301 1302 1303 1304 1305 1306 1307 1308 1309 1310 1311 1312 1313 1314 1315 1316 1317 1318 1319 1320 1321 1322 1323 1324 1325 1326 1327 1328 1329 1330 1331 1332 1333 1334 1335 1336 1337 1338 1339 1340 1341 1342 1343 1344 1345 1346 1347 1348 1349 1350 1351 1352 1353 1354 1355 1356 1357 1358 1359 1360 1361 1362 1363 1364 1365 1366 1367 1368 1369 1370 1371 1372 1373 1374 1375 1376 1377 1378 1379 1380 1381 1382 1383 1384 1385 1386 1387 1388 1389 1390 1391 1392 1393 1394 1395 1396 1397 1398 1399 1400 1401 1402 1403 1404 1405 1406 1407 1408 1409 1410 1411 1412 1413 1414 1415 1416 1417 1418 1419 1420 1421 1422 1423 1424 1425 1426 1427 1428 1429 1430 1431 1432 1433 1434 1435 1436 1437 1438 1439 1440 1441 1442 1443 1444 1445 1446 1447 1448 1449 1450 1451 1452 1453 1454 1455 1456 1457 1458 1459 1460 1461 1462 1463 1464 1465 1466 1467 1468 1469 1470 1471 1472 1473 1474 1475 1476 1477 1478 1479 1480 1481 1482 1483 1484 1485 1486 1487 1488 1489 1490 1491 1492 1493 1494 1495 1496 1497 1498 1499 1500 1501 1502 1503 1504 1505 1506 1507 1508 1509 1510 1511 1512 1513 1514 1515 1516 1517 1518 1519 1520 1521 1522 1523 1524 1525 1526 1527 1528 1529 1530 1531 1532 1533 1534 1535 1536 1537 1538 1539 1540 1541 1542 1543 1544 1545 1546 1547 1548 1549 1550 1551 1552 1553 1554 1555 1556 1557 1558 1559 1560 1561 1562 1563 1564 1565 1566 1567 1568 1569 1570 1571 1572 1573 1574 1575 1576 1577 1578 1579 1580 1581 1582 1583 1584 1585 1586 1587 1588 1589 1590 1591 1592 1593 1594 1595 1596 1597 1598 1599 1600 1601 1602 1603 1604 1605 1606 1607 1608 1609 1610 1611 1612 1613 1614 1615 1616 1617 1618 1619 1620 1621 1622 1623 1624 1625 1626 1627 1628 1629 1630 1631 1632 1633 1634 1635 1636 1637 1638 1639 1640 1641 1642 1643 1644 1645 1646 1647 1648 1649 1650 1651 1652 1653 1654 1655 1656 1657 1658 1659 1660 1661 1662 1663 1664 1665 1666 1667 1668 1669 1670 1671 1672 1673 1674 1675 1676 1677 1678 1679 1680 1681 1682 1683 1684 1685 1686 1687 1688 1689 1690 1691 1692 1693 1694 1695 1696 1697 1698 1699 1700 1701 1702 1703 1704 1705 1706 1707 1708 1709 1710 1711 1712 1713 1714 1715 1716 1717 1718 1719 1720 1721 1722 1723 1724 1725 1726 1727 1728 1729 1730 1731 1732 1733 1734 1735 1736 1737 1738 1739 1740 1741 1742 1743 1744 1745 1746 1747 1748 1749 1750 1751 1752 1753 1754 1755 1756 1757 1758 1759 1760 1761 1762 1763 1764 1765 1766 1767 1768 1769 1770 1771 1772 1773 1774 1775 1776 1777 1778 1779 1780 1781 1782 1783 1784 1785 1786 1787 1788 1789 1790 1791 1792 1793 1794 1795 1796 1797 1798 1799 1800 1801 1802 1803 1804 1805 1806 1807 1808 1809 1810 1811 1812 1813 1814 1815 1816 1817 1818 1819 1820 1821 1822 1823 1824 1825 1826 1827 1828 1829 1830 1831 1832 1833 1834 1835 1836 1837 1838 1839 1840 1841 1842 1843 1844 1845 1846 1847 1848 1849 1850 1851 1852 1853 1854 1855 1856 1857 1858 1859 1860 1861 1862 1863 1864 1865 1866 1867 1868 1869 1870 1871 1872 1873 1874 1875 1876 1877 1878 1879 1880 1881 1882 1883 1884 1885 1886 1887 1888 1889 1890 1891 1892 1893 1894 1895 1896 1897 1898 1899 1900 1901 1902 1903 1904 1905 1906 1907 1908 1909 1910 1911 1912 1913 1914 1915 1916 1917 1918 1919 1920 1921 1922 1923 1924 1925 1926 1927 1928 1929 1930 1931 1932 1933 1934 1935 1936 1937 1938 1939 1940 1941 1942 1943 1944 1945 1946 1947 1948 1949 1950 1951 1952 1953 1954 1955 1956 1957 1958 1959 1960 1961 1962 1963 1964 1965 1966 1967 1968 1969 1970 1971 1972 1973 1974 1975 1976 1977 1978 1979 1980 1981 1982 1983 1984 1985 1986 1987 1988 1989 1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 2633 2634 2635 2636 2637 2638 2639 2640 2641 2642 2643 2644



BENDING MOMENT COMPUTATION  
7.07 g PIN PUNCTURE LOADING

$$R_c = 8000. \text{ IN.}$$

$$\text{INITIAL AXIAL STRAIN} = -0.000097 \text{ IN/IN}$$

SHELL & LOC.	Y (IN.)	TOTAL STRAIN IN/IN	STRESS (KSI)	INCREMENTAL MOMENT (-)
-----------------	------------	--------------------------	-----------------	------------------------------

## INNER

1	24.44	-0.0032	-23.0	3.79(10) <sup>6</sup>
2	19.02	-0.0025	-22.7	2.91
3	12.71	-0.0017	-22.3	1.91
4	4.46	-0.0007	-21.5	0.15
5	-4.46	0.0005	20.	~0.
6	-12.71	0.0015	11.0	0.94
7	-19.02	0.0023	13.5	1.73
8	-24.44	0.0030	15.0	2.47

$$\Sigma 1.39(10)^7$$

## OUTER

1	29.67	-0.0038	-21.2	1.54(10) <sup>7</sup>
2	25.15	-0.0032	-20.5	1.27
3	16.81	-0.0022	-19.5	0.81
4	5.90	-0.0008	-13.5	0.20
5	-5.90	0.0006	17.0	0.25
6	-16.81	0.0020	20.0	0.83
7	-25.15	0.0032	20.0	1.23
8	-29.67	0.0036	20.1	1.46

$$\Sigma 7.54(10)^7$$

## WATER

1	39.85	-0.0051	-12.8	6.10(10) <sup>6</sup>
2	33.78	-0.0043	-12.0	4.85
3	22.57	-0.0029	-10.7	2.89
4	7.93	-0.0011	-8.5	0.81
5	-7.93	0.0009	20.4	1.93
6	-22.57	0.0027	23.2	6.27
7	-33.78	0.0041	24.8	10.00
8	-39.85	0.0049	25.2	12.02

$$\Sigma 4.49(10)^7$$

TOTAL FOR THREE FULL  
SHELLS

$$\bar{M} = 2.68(10)^8 \text{ IN-LBS}$$

$$\text{REQ'D 7.07g MOMENT} = 3.67(10)^7 \text{ IN-LBS} \quad \text{XI-G4}$$

## PIN-PUNCTURE LOADING - DESIGN CRITERIA

### PRIMARY STRESS CRITERIA, $S_c$ 3

FOR THE GENERAL CASK LOADINGS OF THE PIN-PUNCTURE (i.e., 7.07G AND 800psi IN THE WATER CHAMBER), THE PRIMARY STRESSES WERE COMPUTED AND COMPARED TO THE 0.7  $S_u$  ALLOWABLE STRESS. THIS CALCULATION IS SUMMARIZED IN TABLES 2(a) & (b). AS INDICATED ON SAR PAGE XI-1-76, THE CRITERIA DOES NOT REQUIRE THE LOCAL EFFECTS OF THE PIN-PUNCTURE TO BE ADDRESSED BY A PRIMARY STRESS CRITERION,

### PRIMARY PLUS SECONDARY STRESS RANGE CALCULATION, $S$

TO SIMULATE THE LOCAL STRESS FROM THE PIN-PUNCTURE AN ADDITIONAL LOAD CASE WAS INTRODUCED WHICH CONSIDERED THE PIN TO EXERT 50000psi (THE PIN MATERIAL'S STRENGTH) AT THE MID-CASK OUTER SURFACE OF THE INNER AND OUTER SHELLS. IN TABLE 3, THE BASE CASE STRESSES ARE LISTED FOR ALL LOADINGS, INCLUDING THE PIN STRESS, CASE 15 AT LOCATIONS 12 AND 14 (SEE SAR FIG. 3.8.4-15 & 16), WHERE THE STRESS APPEARS AS A COMPRESSIVE RADIAL COMPONENT, (NOTE THAT THE OTHER STRESSES APPEARING IN TABLE 3 ARE IDENTICAL TO THOSE OF SAR TABLE 3.8.4-2.)

THE LOADING CASES CONSIDERED IN THE NORMAL OPERATION OF THE CASK AND THE ACCIDENT CONDITIONS ARE LISTED IN TABLE 4. LOAD CASES 26, 30, 34, 35, 36 AND 37 ARE DIFFERENT COMBINATIONS OF THE PIN PUNCTURE ALONG WITH THE DIFFERENT HEAT LOADS AND AMBIENT CONDITIONS.

NOTE, IN THIS TABLE 4, THE 50000psi PIN LOAD IS COMBINED WITH ONLY THE -7.07G AXIAL BENDING LOAD IN CASES 26, 30 & 34. IN CASES 35, 36 & 37, THE +7.07G AXIAL BENDING IS CONSIDERED

XI-66

PIL-STRUCTURE-DESIGN CRITERIA (CONT.)

WITHOUT THE RADIAL PIN PRESSURES, ALSO, TABLE 4 CONSIDERS ONLY THE -BIG, 30 FT. DROP LOADING CASES IN THE RANGE OF RANGE WAS MADE USING THE +BIG BENDING LOADING BUT NO LARGER STRESS RANGES WERE FOUND. THE TWO SIGNS OF THE BIG BENDING WERE NOT INCLUDED IN THE SAME RANGE CALCULATION SINCE IF THEY WERE BOTH INCLUDED IT IMPLIES THAT THE CASE IS SUBJECTED TO TWO 30 FT. DROP LOADINGS.

THE RESULTS OF THIS STRESS RANGE CALCULATION ARE GIVEN IN TABLE 5. THE MAXIMUM STRESS RANGE FOR THE OUTSIDE OF THE OUTER SHELL (LOCATION 14) IS 103274 PSI, FOR THE OUTSIDE OF THE INNER SHELL (LOCATION 12) 98601 PSI. NEITHER OF THESE STRESS RANGES EXCEEDS THE MAXIMUM STRESS RANGE THAT OCCURS AT LOCATION 26 OF 123560 PSI. SINCE ALL POINTS IN THE CASE WERE CONSIDERED IN THE RANGE EVALUATION, THE REPORTED MAXIMUM RANGE CONSIDERS ALL POINTS IN THE CASE, NOT JUST THE POINTS EXCEEDING THE ALTERNATE 1 STRESS ALLOWABLE.

TABLE 2(a)

5/76

## ACCIDENT PRIMARY STATIC AND DYNAMIC STRESS EVALUATION

BASE CASE	MULTIPLIER	BASE CASE DESCRIPTION
9	8.00000	100 PSI WATER CHAMBER
10	.16500	100 PSI CAVITY
11	7.07000	1.0 G SIDE DROP

LOCATION	EFFECTIVE STRESS	TEMP.	STRESS ALLOWABLES		
			0.9SY	0.7SU	0.9SU
1	4544	268	21028	45465	58455
3	3855	248	21395	45990	59130
5	9967	218	21945	46777	60142
7	8606	316	20148	44205	56835
9	7641	303	20336	44546	57274
11	10266	420	18389	41895	53865
13	8801	359	19359	43076	55384
15	38375	323	20019	44021	56599
17	8061	302	20405	44572	57307
19	6545	290	20625	44887	57712
21	6500	292	20588	44835	57645
23	7981	271	20973	45386	58354
25	4070	241	21523	46174	59366
27	9730	213	21945	46777	60142
29	463	260	21175	45675	58721
31	1790	256	21248	45780	58860
33	2057	240	21541	46200	59400

X1-G7

# TABLE 2(b)

5/76

## ACCIDENT PRIMARY STATIC AND DYNAMIC STRESS EVALUATION

BASE CASE	MULTIPLIER	BASE CASE DESCRIPTION
9	8.00000	100 PSI WATER CHAMBER
10	.16500	100 PSI CAVITY
11	-7.07000	1.0 G SIDE DROP

LOCATION	EFFECTIVE STRESS	TEMP.	STRESS ALLOWABLES		
			0.9SY	0.7SU	0.9SU
1	4572	268	21028	45465	58455
3	1973	248	21395	45990	59130
5	6228	218	21945	46777	60142
7	6433	316	20148	44205	56835
9	5018	303	20386	44546	57274
11	7862	420	18389	41895	53865
13	4992	359	19359	43076	55384
15	40150	323	20019	44021	56599
17	6759	302	20405	44572	57307
19	5909	290	20625	44887	57712
21	6500	292	20588	44835	57645
23	6573	271	20973	45386	58354
25	3047	241	21523	46174	59366
27	6968	218	21945	46777	60142
29	1887	260	21175	45675	58725
31	1790	256	21248	45780	58860
33	2057	240	21541	46200	59400

XI-68

TABLE 3

5/76

## BASE CASE STRESS DATA FOR EACH CASK LOCATION

LOCATION	BASE CASE NUMBER	SIGR	STRESS COMPONENTS			SIGRZ
			SIGZ	SIGH		
1	1	0	0	0	0	0
1	2	-0	38589	13740	-0	-0
1	3	-0	30352	11074	-0	-0
1	4	-16	21994	-5604	0	0
1	5	0	21696	8599	0	0
1	6	-16	17703	-26774	0	0
1	7	-0	-3621	-1032	-0	-0
1	8	-0	-1086	-47	-0	-0
1	9	-0	-555	-531	-0	-0
1	10	-100	1964	968	-0	-0
1	11	-0	204	-0	-0	-0
1	12	-16	39188	5827	0	0
1	13	-16	35788	1688	0	0
1	14	-16	34561	-19753	0	0
1	15	0	0	0	0	0
2	1	0	0	0	0	0
2	2	1510	-20457	-8491	-791	-791
2	3	1276	-17360	-7076	-588	-588
2	4	322	-44706	-29619	-262	-262
2	5	1408	-10115	-4022	-456	-456
2	6	580	-80532	-61123	41	41
2	7	-174	-2582	-722	68	68
2	8	-82	-626	98	52	52
2	9	-109	-69	-343	63	63
2	10	102	-299	153	-58	-58
2	11	-0	204	-0	-0	-0
2	12	1455	-34616	-21073	-606	-606
2	13	1200	-42980	-26541	-382	-382
2	14	-200	-75403	-58354	291	291
2	15	0	0	0	0	0
3	1	0	0	0	0	0
3	2	2505	-19246	-9884	769	769
3	3	1903	-14883	-7620	579	579
3	4	127	3881	-5672	234	234
3	5	1504	-14795	-12401	474	474
3	6	-466	16383	-10535	-72	-72
3	7	-520	695	-32	-136	-136
3	8	67	-233	103	26	26
3	9	50	-138	-340	14	14
3	10	-99	-114	211	-38	-38

X1-69

TABLE 3

(CONT.)

5/76

## BASE CASE STRESS DATA FOR EACH CASK LOCATION

LOCATION	BASE CASE NUMBER	SIGR	SIGZ	SIGH	SIGRZ
3	11	-0	278	-0	-0
3	12	1158	-10397	-9797	730
3	13	-189	-4345	-7474	20
3	14	-1161	18652	-13302	-213
3	15	0	0	0	0
4	1	0	0	0	0
4	2	-0	13690	1722	-0
4	3	-0	10893	1448	-0
4	4	-235	-4556	-2365	0
4	5	0	8535	1138	0
4	6	0	-25280	-15429	0
4	7	0	-11812	-3669	-0
4	8	-0	-932	-102	-0
4	9	-100	72	-263	-0
4	10	-0	418	380	-0
4	11	-0	278	-0	-0
4	12	-14	4542	84	0
4	13	-33	319	902	0
4	14	0	-38661	-23438	0
4	15	0	0	0	0
5	1	0	0	0	0
5	2	-0	-1150	-443	-0
5	3	-0	-919	-377	-0
5	4	-235	36467	10384	0
5	5	0	-884	3012	0
5	6	0	20846	20101	0
5	7	-0	-5297	-716	-0
5	8	-0	-3339	-509	-0
5	9	-100	8831	2572	-0
5	10	-0	-25	61	-0
5	11	-0	274	-0	-0
5	12	-14	10775	-2449	0
5	13	-33	14221	5449	0
5	14	0	35048	18925	0
5	15	0	0	0	0
6	1	0	0	0	0
6	2	-0	-925	-375	-0
6	3	-0	-677	-265	-0
6	4	0	-22338	-7258	0
6	5	0	3684	4382	0

X1-610

5/76

**TABLE 3** (CONT.)  
**BASE CASE STRESS DATA FOR EACH CASK LOCATION**

LOCATION	BASE CASE NUMBER	SIGR	SIGZ	SIGH	SIGRZ
6	6	0	21075	20170	0
6	7	-0	850	1129	-0
6	8	-0	298	583	-0
6	9	-3	-6682	-2082	-0
6	10	-3	160	116	-0
6	11	-0	274	-0	-0
6	12	0	-5549	-1914	0
6	13	0	-5117	-352	0
6	14	0	12092	12038	0
6	15	0	0	0	0
7	1	0	0	0	0
7	2	-0	-875	39789	-0
7	3	-0	-791	29377	-0
7	4	-16	-14465	-10039	0
7	5	0	-358	25802	0
7	6	-16	-28860	-32165	0
7	7	-0	-3722	-964	-0
7	8	-0	-860	-19	-0
7	9	-0	136	-897	-0
7	10	-100	458	957	-0
7	11	-0	273	-0	-0
7	12	-16	-6743	22532	0
7	13	-16	-12241	12143	0
7	14	-16	-26901	-10856	0
7	15	0	0	0	0
8	1	0	0	0	0
8	2	1398	2796	39237	52
8	3	1385	1104	28730	67
8	4	-334	-12975	-8603	-119
8	5	905	1521	25028	950
8	6	-1065	-30301	-30890	31
8	7	-20	-3789	-938	-90
8	8	-2	-884	-27	-8
8	9	-33	2	-909	11
8	10	-64	525	938	-12
8	11	-0	273	-0	-0
8	12	742	-3335	22988	-320
8	13	419	-6467	14093	-335
8	14	-431	-20391	-8025	-228
8	15	0	0	0	0

X1-611



**TABLE 3** (CONT.)  
**BASE CASE STRESS DATA FOR EACH CASK LOCATION**

LOCATION	BASE CASE NUMBER	SIGR	SIGZ	SIGH	SIGRZ
9	1	0	0	0	0
9	2	1303	-4994	-22178	119
9	3	367	-3916	-16574	102
9	4	-394	-4757	-2986	-216
9	5	896	-7031	-16790	56
9	6	-872	-12172	10037	-10
9	7	10	-4766	-130	-86
9	8	-3	-1016	48	41
9	9	-50	-7	-820	-5
9	10	-42	253	599	-4
9	11	-0	373	-0	-0
9	12	544	-4296	-14561	-276
9	13	171	-4890	-10035	-344
9	14	-367	-15718	-533	-183
9	15	0	0	0	0
10	1	0	0	0	0
10	2	0	-7592	-21440	0
10	3	0	-5390	-15882	0
10	4	-235	8166	7013	0
10	5	0	-3569	-11674	0
10	6	0	6171	20583	0
10	7	0	-4450	-34	0
10	8	0	-1006	48	0
10	9	-100	-91	-798	0
10	10	0	303	573	0
10	11	-0	372	-0	-0
10	12	-14	484	-8641	0
10	13	-33	6573	872	0
10	14	0	842	11006	0
10	15	0	0	0	0
11	1	0	0	0	0
11	2	0	9045	40061	0
11	3	0	6864	29480	0
11	4	-16	-23434	-25920	0
11	5	0	6676	27363	0
11	6	-16	-29632	-42799	0
11	7	0	-2318	-137	0
11	8	0	-2712	-30	0
11	9	0	-75	-1176	0
11	10	-100	396	1098	0

TABLE 3

(CONT.)

5/76

## BASE CASE STRESS DATA FOR EACH CASK LOCATION

LOCATION	BASE CASE NUMBER	STRESS COMPONENTS			
		SIGR	SIGZ	SIGH	SIGRZ
11	11	-0	377	-0	-0
11	12	-16	-4680	17403	0
11	13	-16	-16381	247	0
11	14	-16	-34147	-26639	0
11	15	0	0	0	0
12	1	0	0	0	0
12	2	1209	9042	38783	-3
12	3	994	6860	28540	-2
12	4	-708	-21399	-23149	0
12	5	300	6214	26033	-5
12	6	-1093	-27529	-39393	1
12	7	-3	-2315	-133	32
12	8	-1	-2712	-30	-11
12	9	-38	-75	-1140	0
12	10	-60	399	1059	0
12	11	-0	377	-0	-0
12	12	506	-3338	18159	0
12	13	-10	-14105	2449	0
12	14	-319	-31834	-23587	0
12	15	-50000	-0	-0	-0
13	1	0	0	0	0
13	2	1459	-8223	-23865	-3
13	3	1092	-6240	-17111	-1
13	4	-735	-825	2225	0
13	5	1006	-8840	-17236	-4
13	6	-1134	-7334	14707	4
13	7	-3	-2630	-70	-29
13	8	-6	-2685	99	39
13	9	-51	11	-834	0
13	10	-44	281	651	0
13	11	-0	512	-0	-0
13	12	460	-4243	-11136	0
13	13	-110	-2849	-4426	0
13	14	-356	-9741	7796	0
13	15	0	0	0	0
14	1	0	0	0	0
14	2	0	-8247	-21371	0
14	3	0	-6264	-15995	0
14	4	-235	10314	12601	0
14	5	0	-4408	-11834	0

XI-G13

**TABLE 3** (CONT.)  
**BASE CASE STRESS DATA FOR EACH CASK LOCATION**

5/76

LOCATION	BASE CASE NUMBER	SIGR	STRESS COMPONENTS		SIGRZ
			SIGZ	SIGH	
14	6	0	2118	22673	0
14	7	0	-2624	-64	0
14	8	0	-2685	93	0
14	9	-100	11	-786	0
14	10	0	233	609	0
14	11	-0	512	-0	-0
14	12	-14	-4243	-11136	0
14	13	-33	-2849	-4426	0
14	14	0	486	16752	0
14	15	-50000	-0	-0	-0
<hr/>					
15	1	0	0	0	0
15	2	0	-1356	0	0
15	3	0	-1042	0	0
15	4	-235	9322	12711	0
15	5	0	1784	0	0
15	6	0	26887	-19	0
15	7	0	-2223	4	0
15	8	0	-2641	-4	0
15	9	-100	1464	5417	0
15	10	0	87	0	0
15	11	-0	506	-0	-0
15	12	-14	3368	748	0
15	13	-33	5861	1509	0
15	14	0	32512	-33	0
15	15	0	0	0	0
<hr/>					
16	1	0	0	0	0
16	2	0	-1365	0	0
16	3	0	-1042	0	0
16	4	0	9440	12746	0
16	5	0	1784	0	0
16	6	0	26995	13	0
16	7	0	-2223	3	0
16	8	0	-2641	-3	0
16	9	0	1464	5417	0
16	10	0	87	0	0
16	11	-0	506	-0	-0
16	12	0	3430	767	0
16	13	0	5975	1521	0
16	14	0	32695	22	0
16	15	0	0	0	0

XI-G14

TABLE 3

(CONT.)

BASE CASE STRESS DATA FOR EACH CASK LOCATION

LOCATION	BASE CASE NUMBER	SIGR	STRESS COMPONENTS			SIGRZ
			SIGZ	SIGH		
17	1	0	0	0	0	0
17	2	0	-1219	16977	0	0
17	3	0	-3401	12926	0	0
17	4	-16	-4569	-2407	0	0
17	5	0	5956	15797	0	0
17	6	-16	-17600	-21849	0	0
17	7	0	-478	-1278	0	0
17	8	0	-384	242	0	0
17	9	0	642	-777	0	0
17	10	-100	2566	1867	0	0
17	11	-0	174	-0	-0	0
17	12	-16	7013	16423	0	0
17	13	-16	7985	10575	0	0
17	14	-16	3127	-4322	0	0
17	15	0	0	0	0	0
18	1	0	0	0	0	0
18	2	1582	14413	21759	711	0
18	3	1521	12774	17922	532	0
18	4	133	-25168	-8369	-7	0
18	5	1661	-7061	9033	28	0
18	6	-930	-40657	-26435	11	0
18	7	-493	-7138	-3726	-135	0
18	8	42	-5336	-1193	-7	0
18	9	-157	-792	-1254	-98	0
18	10	-157	85	1016	-28	0
18	11	-0	174	-0	-0	0
18	12	1504	-32362	1103	-323	0
18	13	951	-36269	-5975	-296	0
18	14	-366	-44064	-19572	-350	0
18	15	0	0	0	0	0
19	1	0	0	0	0	0
19	2	0	8960	16132	0	0
19	3	0	5196	12479	0	0
19	4	-16	-18589	-3030	0	0
19	5	0	-4241	10580	0	0
19	6	-16	-35515	-15895	0	0
19	7	0	-1099	-1281	0	0
19	8	0	-3699	-327	0	0
19	9	0	244	-739	0	0
19	10	-100	1915	1923	0	0

X1-G15

TABLE 3

(CONT.)

BASE CASE, STRESS DATA FOR EACH CASK LOCATION

LOCATION	BASE CASE NUMBER	SIGR	STRESS COMPONENTS			SIGRZ
			SIGZ	SIGH		
19	11	-0	174	-0	-0	
19	12	-16	-16914	8842	0	
19	13	-16	-15243	5466	0	
19	14	-16	-22134	-3520	0	
19	15	0	0	0	0	
20	1	0	0	0	0	
20	2	0	10097	16473	0	
20	3	0	8547	13488	0	
20	4	0	13204	6508	0	
20	5	0	12650	-15647	0	
20	6	0	17063	-122	0	
20	7	0	-7039	-3063	0	
20	8	0	3351	-1788	0	
20	9	0	-742	-1035	0	
20	10	0	373	1460	0	
20	11	-0	174	-0	-0	
20	12	0	22316	20611	0	
20	13	0	16663	15038	0	
20	14	0	19027	8829	0	
20	15	0	0	0	0	
21	1	0	0	0	0	
21	2	1861	0	15407	0	
21	3	-1494	0	12410	0	
21	4	9855	0	3430	0	
21	5	-19599	0	4874	0	
21	6	38415	0	3591	0	
21	7	-493	0	-1569	0	
21	8	1243	0	761	0	
21	9	105	0	-888	0	
21	10	-151	0	1095	0	
21	11	-0	0	-0	-0	
21	12	-13359	0	7879	0	
21	13	-9482	0	4452	0	
21	14	5446	0	-2847	0	
21	15	0	0	0	0	
22	1	0	0	0	0	
22	2	1716	0	12849	0	
22	3	-1395	0	10461	0	
22	4	-10337	0	-3174	0	
22	5	15581	0	17536	0	

X1-616

TABLE 3

(CONT.)

5/76

BASE CASE STRESS DATA FOR EACH CASE LOCATION

LOCATION	BASE CASE NUMBER	SIGR	STRESS COMPONENTS			SIGRZ
			SIGZ	SIGH		
22	6	-37361	0	-22505		0
22	7	736	0	-1018		0
22	8	-1403	0	-318		0
22	9	104	0	-784		0
22	10	-159	0	1246		0
22	11	-0	0	-0		-0
22	12	9880	0	16647		0
22	13	6377	0	10596		0
22	14	-5370	0	-6189		0
22	15	0	0	0		0
23	1	0	0	0		0
23	2	1377	2609	-10743		-969
23	3	1549	2446	-8148		-532
23	4	-265	-4494	-8938		36
23	5	1105	-4274	-12135		-424
23	6	-748	-18752	-12941		48
23	7	457	2307	99		-124
23	8	-323	-7502	-1817		137
23	9	-89	151	-831		29
23	10	-178	-463	314		69
23	11	-0	237	-0		-0
23	12	344	-4309	-12024		118
23	13	0	-8438	-11510		344
23	14	-1354	-28600	-20067		219
23	15	0	0	0		0
24	1	0	0	0		0
24	2	0	-7242	-13055		0
24	3	0	-5721	-10116		0
24	4	-235	4974	186		0
24	5	0	-4780	-8545		0
24	6	0	10783	3155		0
24	7	0	-1832	-1204		0
24	8	0	-3988	-583		0
24	9	-100	-257	-893		0
24	10	0	625	636		0
24	11	-0	237	-0		-0
24	12	-14	-2172	-6956		0
24	13	-33	3894	-726		0
24	14	0	7020	-1947		0
24	15	0	0	0		0

XI-617

5/76

TABLE 3

(CONT.)

BASE CASE STRESS DATA FOR EACH GASK LOCATION

LOCATION	BASE CASE NUMBER	SIGR	STRESS COMPONENTS		SIGRZ
			SIGZ	SIGH	
25	1	0	0	0	0
25	2	0	-13635	-8237	0
25	3	0	-10556	-2418	0
25	4	0	17066	-5032	0
25	5	0	-4631	-5280	0
25	6	0	62964	-19394	0
25	7	0	-2690	-561	0
25	8	0	5797	26	0
25	9	0	43	-356	0
25	10	0	900	130	0
25	11	-0	200	-0	-0
25	12	0	3762	-4011	0
25	13	0	15600	-3073	0
25	14	0	75983	-14153	0
25	15	0	0	0	0
26	1	0	0	0	0
26	2	0	23117	3398	0
26	3	0	8236	2964	0
26	4	-235	-16180	-8120	0
26	5	0	-3500	-1236	0
26	6	0	-69868	-45419	0
26	7	0	3576	1147	0
26	8	0	-17483	-6159	0
26	9	-100	-197	-491	0
26	10	0	-822	-342	0
26	11	-0	200	-0	-0
26	12	-14	-9923	-3114	0
26	13	-33	-20066	-6764	0
26	14	0	-96828	-53277	0
26	15	0	0	0	0
27	1	0	0	0	0
27	2	0	-2953	48	0
27	3	0	-2206	24	0
27	4	-235	42790	10154	0
27	5	0	535	3958	0
27	6	0	49485	16661	0
27	7	0	-2856	-530	0
27	8	0	-4203	-1156	0
27	9	-100	9246	2562	0
27	10	0	291	-11	0

XI-G18

5/76

TABLE 3

(CONT.)

BASE CASE STRESS DATA FOR EACH CASK LOCATION

LOCATION	BASE CASE NUMBER	SIGX	SIGY	SIGZ	SIGRZ
27	11	-0	197	-0	-0
27	12	-14	12558	3533	0
27	13	-33	20685	5353	0
27	14	0	59703	-10156	0
27	15	0	0	0	-0
28	1	0	0	0	0
28	2	0	883	1198	0
28	3	0	615	870	0
28	4	0	-28596	-11261	0
28	5	0	2444	4531	0
28	6	0	-6899	-254	0
28	7	0	433	456	0
28	8	0	-934	-176	0
28	9	0	-7124	-2349	0
28	10	0	-158	-146	0
28	11	-0	197	-0	-0
28	12	0	-7206	-2396	0
28	13	0	-11399	-4273	0
28	14	0	-8003	1692	0
28	15	0	0	0	0
29	1	0	0	0	0
29	2	0	4588	1274	0
29	3	0	3215	892	0
29	4	-16	1136	717	0
29	5	0	1527	1445	0
29	6	-16	-1150	-393	0
29	7	0	-6176	-1801	0
29	8	0	3528	1059	0
29	9	0	-45	-9	0
29	10	-100	6953	2173	0
29	11	-0	106	-0	-0
29	12	-16	3249	1563	0
29	13	-16	2075	1078	0
29	14	-16	1163	670	0
29	15	0	0	0	0
30	1	0	0	0	0
30	2	0	11675	3400	0
30	3	0	8369	2439	0
30	4	0	-6140	-1467	0
30	5	0	5339	2589	0

X1-G19



5/76

TABLE 3

(CONT.)

BASE CASE STRESS DATA FOR EACH CASK LOCATION

LOCATION	BASE CASE NUMBER	SIGR	STRESS COMPONENTS			SIGRZ
			SIGZ	SIGH		
30	6	0	-15233	-4617	0	
30	7	0	-1978	-541	0	
30	8	0	-3660	-1098	0	
30	9	0	-326	-93	0	
30	10	-0	-4519	-1263	-0	
30	11	-0	106	-0	-0	
30	12	0	909	861	0	
30	13	0	-1608	-27	0	
30	14	0	-4510	-1032	0	
30	15	0	0	0	0	
31	1	0	0	0	0	
31	2	0	10409	3020	0	
31	3	-0	7582	2202	0	
31	4	0	-22684	-5110	0	
31	5	0	11024	2209	0	
31	6	0	-39304	-8805	0	
31	7	0	180	106	0	
31	8	0	-5066	-1519	0	
31	9	0	-46	-9	0	
31	10	0	-1218	-278	0	
31	11	-0	0	-0	-0	
31	12	0	-10840	4028	0	
31	13	0	-18018	-3778	0	
31	14	0	-26309	-5339	0	
31	15	0	0	0	0	
32	1	0	0	0	0	
32	2	0	13374	3910	0	
32	3	0	9335	2729	0	
32	4	0	14996	6194	0	
32	5	0	-1886	-1562	0	
32	6	0	15863	7745	0	
32	7	0	-10838	-3199	0	
32	8	0	3512	1054	0	
32	9	0	-500	-145	0	
32	10	0	3460	1125	0	
32	11	-0	0	-0	-0	
32	12	0	16010	6000	0	
32	13	0	18112	7061	0	
32	14	0	21296	8943	0	
32	15	0	0	0	0	

XI-G20

TABLE 3

(CONT.)

5/76

BASE CASE STRESS DATA FOR EACH CASK LOCATION

LOCATION	BASE CASE NUMBER	STRESS COMPONENTS			
		SIGR	SIGZ	SIGH	SIGRZ
33	1	0	0	0	0
33	2	0	5187	1213	0
33	3	0	3300	803	0
33	4	0	19418	6755	0
33	5	0	-6049	-2944	0
33	6	0	30512	12707	0
33	7	0	-6060	-1871	0
33	8	0	3387	1803	0
33	9	0	-320	1	0
33	10	0	2830	932	0
33	11	-0	0	-0	-0
33	12	0	10861	-2523	0
33	13	0	17614	5745	0
33	14	0	26429	-31605	0
33	15	0	0	0	0
34	1	0	0	0	0
34	2	0	18478	5200	0
34	3	0	13534	3873	0
34	4	0	-27295	-7259	0
34	5	0	15606	3552	0
34	6	0	-54181	-12701	0
34	7	0	-4664	-1453	0
34	8	0	-4730	-632	0
34	9	0	-214	33	0
34	10	0	-529	-76	0
34	11	-0	0	-0	-0
34	12	0	-5957	-1396	0
34	13	0	-17798	-4879	0
34	14	0	-31605	-5541	0
34	15	0	0	0	0

X1-G21

5/76

TABLE 4.

ACCIDENT STRESS RANGE EVAL. NORM. CYCLE ALL DROPS AND POST FIRE

## LOAD CASES CONSIDERED IN ACCIDENT STRESS RANGE EVALUATION

LOAD CASE	1	FOR RANGE CALCULATIONS
BASE CASE	MULTIPLIER	
1	1.000	0.0 STRESS
LOAD CASE	2	FOR RANGE CALCULATIONS
BASE CASE	MULTIPLIER	
2	1.000	-40.0 F ISOTHERMAL
8	-.100	30 G BOTTOM END DROP
11	3.160	1.0 G SIDE DROP
LOAD CASE	3	FOR RANGE CALCULATIONS
BASE CASE	MULTIPLIER	
2	1.000	-40.0 F ISOTHERMAL
8	-.100	30 G BOTTOM END DROP
11	-3.160	1.0 G SIDE DROP
LOAD CASE	4	FOR RANGE CALCULATIONS
BASE CASE	MULTIPLIER	
2	1.000	-40.0 F ISOTHERMAL
8	.100	30 G BOTTOM END DROP
11	3.160	1.0 G SIDE DROP
LOAD CASE	5	FOR RANGE CALCULATIONS
BASE CASE	MULTIPLIER	
2	1.000	-40.0 F ISOTHERMAL
8	.100	30 G BOTTOM END DROP
11	-3.160	1.0 G SIDE DROP
LOAD CASE	6	FOR RANGE CALCULATIONS
BASE CASE	MULTIPLIER	
2	1.000	-40.0 F ISOTHERMAL
11	14.550	1.0 G SIDE DROP
LOAD CASE	7	FOR RANGE CALCULATIONS
BASE CASE	MULTIPLIER	
2	1.000	-40.0 F ISOTHERMAL
11	-14.550	1.0 G SIDE DROP
LOAD CASE	8	FOR RANGE CALCULATIONS
BASE CASE	MULTIPLIER	
3	1.000	70.0 F ISOTHERMAL
8	-.100	30 G BOTTOM END DROP
11	3.160	1.0 G SIDE DROP

Xi-G22

5/76

## TABLE 4

(CONT.)

ACCIDENT STRESS RANGE EVAL. NORM. CYCLE ALL DROPS AND POST FIRE

## LOAD CASES CONSIDERED IN ACCIDENT STRESS RANGE EVALUATION

## LOAD CASE 9 FOR RANGE CALCULATIONS

BASE CASE	MULTIPLIER	
3	1.000	70.0 F ISOTHERMAL
8	-.100	30 G BOTTOM END DROP
11	-3.150	1.0 G SIDE DROP

## LOAD CASE 10 FOR RANGE CALCULATIONS

BASE CASE	MULTIPLIER	
3	1.000	70.0 F ISOTHERMAL
8	-.100	30 G BOTTOM END DROP
11	3.160	1.0 G SIDE DROP

## LOAD CASE 11 FOR RANGE CALCULATIONS

BASE CASE	MULTIPLIER	
3	1.000	70.0 F ISOTHERMAL
8	-.100	30 G BOTTOM END DROP
11	-3.160	1.0 G SIDE DROP

## LOAD CASE 12 FOR RANGE CALCULATIONS

BASE CASE	MULTIPLIER	
3	1.000	70.0 F ISOTHERMAL
11	14.550	1.0 G SIDE DROP

## LOAD CASE 13 FOR RANGE CALCULATIONS

BASE CASE	MULTIPLIER	
3	1.000	70.0 F ISOTHERMAL
11	-14.550	1.0 G SIDE DROP

## LOAD CASE 14 FOR RANGE CALCULATIONS

BASE CASE	MULTIPLIER	
4	1.000	NORMAL 70KW 130F AMBIENT
8	-.100	30 G BOTTOM END DROP
11	3.160	1.0 G SIDE DROP

## LOAD CASE 15 FOR RANGE CALCULATIONS

BASE CASE	MULTIPLIER	
4	1.000	NORMAL 70KW 130F AMBIENT
8	-.100	30 G BOTTOM END DROP
11	-3.160	1.0 G SIDE DROP

## LOAD CASE 16 FOR RANGE CALCULATIONS

BASE CASE	MULTIPLIER	
4	1.000	NORMAL 70KW 130F AMBIENT
8	.100	30 G BOTTOM END DROP
11	3.160	1.0 G SIDE DROP

X1-G23

# TABLE 4

5/76  
(CONT.)

ACCIDENT STRESS RANGE EVAL. NORM. CYCLE ALL DROPS AND POST FIRE

## LOAD CASES CONSIDERED IN ACCIDENT STRESS RANGE EVALUATION

### LOAD CASE 17 FOR RANGE CALCULATIONS

BASE CASE	MULTIPLIER	
4	1.000	NORMAL 70KW 130F AMBIENT
8	1.100	30 G BOTTOM END DROP
11	-3.160	1.0 G SIDE DROP

### LOAD CASE 18 FOR RANGE CALCULATIONS

BASE CASE	MULTIPLIER	
4	1.000	NORMAL 70KW 130F AMBIENT
11	-14.550	1.0 G SIDE DROP

### LOAD CASE 19 FOR RANGE CALCULATIONS

BASE CASE	MULTIPLIER	
4	1.000	NORMAL 70KW 130F AMBIENT
11	-14.550	1.0 G SIDE DROP

### LOAD CASE 20 FOR RANGE CALCULATIONS

BASE CASE	MULTIPLIER	
5	1.000	10 MIN. IN POOL COOL-DOWN

### LOAD CASE 21 FOR RANGE CALCULATIONS

BASE CASE	MULTIPLIER	
6	1.000	POST FIRE 70KW 130F AMBIENT
10	.858	100 PSI CAVITY

### LOAD CASE 22 FOR RANGE CALCULATIONS

BASE CASE	MULTIPLIER	
10	.858	100 PSI CAVITY
14	1.000	POST FIRE 70KW -40F AMBIENT

### LOAD CASE 23 FOR RANGE CALCULATIONS

BASE CASE	MULTIPLIER	
4	1.000	NORMAL 70KW 130F AMBIENT
7	1.000	30 G TOP END DROP

### LOAD CASE 24 FOR RANGE CALCULATIONS

BASE CASE	MULTIPLIER	
4	1.000	NORMAL 70KW 130F AMBIENT
8	1.000	30 G BOTTOM END DROP

### LOAD CASE 25 FOR RANGE CALCULATIONS

BASE CASE	MULTIPLIER	
4	1.000	NORMAL 70KW 130F AMBIENT
11	-81.000	1.0 G SIDE DROP

### LOAD CASE 26 FOR RANGE CALCULATIONS

BASE CASE	MULTIPLIER	
4	1.000	NORMAL 70KW 130F AMBIENT
9	5.800	100 PSI WATER CHAMBER
11	-7.070	1.0 G SIDE DROP
15	1.000	PIN PUNCTURE STRESS

XI-G24

TABLE 4.

(CONT.)

5/76

ACCIDENT STRESS RANGE EVAL. NORM. CYCLE ALL DROPS AND POST FIRE

## LOAD CASES CONSIDERED IN ACCIDENT STRESS RANGE EVALUATION

LOAD CASE 27 FOR RANGE CALCULATIONS		
BASE CASE	MULTIPLIER	
7	1.000	30 G TOP END DROP
12	1.000	NORMAL 40KW -40F AMBIENT
LOAD CASE 28 FOR RANGE CALCULATIONS		
BASE CASE	MULTIPLIER	
8	1.000	30 G BOTTOM END DROP
12	1.000	NORMAL 40KW -40F AMBIENT
LOAD CASE 29 FOR RANGE CALCULATIONS		
BASE CASE	MULTIPLIER	
11	-81.000	1.0 G SIDE DROP
12	1.000	NORMAL 40KW -40F AMBIENT
LOAD CASE 30 FOR RANGE CALCULATIONS		
BASE CASE	MULTIPLIER	
9	5.800	100 PSI WATER CHAMBER
11	-7.070	1.0 G SIDE DROP
12	1.000	NORMAL 40KW -40F AMBIENT
15	1.000	PIN PUNCTURE STRESS
LOAD CASE 31 FOR RANGE CALCULATIONS		
BASE CASE	MULTIPLIER	
7	1.000	30 G TOP END DROP
13	1.000	NORMAL 70KW -40F AMBIENT
LOAD CASE 32 FOR RANGE CALCULATIONS		
BASE CASE	MULTIPLIER	
8	1.000	30 G BOTTOM END DROP
13	1.000	NORMAL 70KW -40F AMBIENT
LOAD CASE 33 FOR RANGE CALCULATIONS		
BASE CASE	MULTIPLIER	
11	-81.000	1.0 G SIDE DROP
13	1.000	NORMAL 70KW -40F AMBIENT
LOAD CASE 34 FOR RANGE CALCULATIONS		
BASE CASE	MULTIPLIER	
9	5.800	100 PSI WATER CHAMBER
11	-7.070	1.0 G SIDE DROP
13	1.000	NORMAL 70KW -40F AMBIENT
15	1.000	PIN PUNCTURE STRESS

X1-625

TABLE 4.

(CONT.)

5/76

ACCIDENT STRESS RANGE EVAL. NORM. CYCLE ALL DROPS AND POST FIRE

## LOAD CASES CONSIDERED IN ACCIDENT STRESS RANGE EVALUATION

LOAD CASE	35	FOR RANGE	CALCULATIONS
BASE CASE	MULTIPLIER		
4	1.000	NORMAL	70KW 130F AMBIENT
9	5.300	100 PSI	WATER CHAMBER
11	7.070	1.0 G	SIDE DROP

LOAD CASE	36	FOR RANGE	CALCULATIONS
BASE CASE	MULTIPLIER		
9	5.800	100 PSI	WATER CHAMBER
11	7.070	1.0 G	SIDE DROP
12	1.000	NORMAL	40KW -40F AMBIENT

LOAD CASE	37	FOR RANGE	CALCULATIONS
BASE CASE	MULTIPLIER		
9	5.800	100 PSI	WATER CHAMBER
11	7.070	1.0 G	SIDE DROP
13	1.000	NORMAL	70KW -40F AMBIENT

X1-G26

## TABLE 5

ACCIDENT STRESS RANGE EVAL. NORM. CYCLE ALL DROPS AND POST FIRE

STRESS RANGE DATA LOAD CASE 26 USED AS REFERENCE

LOC	MAX TEMP	MIN TEMP	STRESS RANGE	ALLOWABLE STRESS	MIN TEMP	STRESS RANGE	ALLOWABLE STRESS
1	439	-40	29152	67273	70	29152	57377
2	435	-40	46239	67342	70	46239	57446
3	403	-40	34781	67807	70	34781	57912
4	331	-40	33013	68131	70	33013	58235
5	257	-40	97970	69340	70	97970	59444
6	257	-40	84243	69340	70	84243	59444
7	476	-40	55016	66634	70	51023	56739
8	471	-40	51192	66721	70	47424	56825
9	459	-40	32291	66928	70	32291	57032
10	435	-40	35457	67342	70	35457	57446
11	561	-40	72788	65168	70	62207	55273
12	556	-40	77657	65254	70	77657	55359
13	514	-40	42825	65979	70	42825	56083
14	490	-40	103274	66393	70	103274	56497
15	327	-40	62513	68657	70	62513	58762
16	327	-40	62558	68657	70	62558	58762
17	462	-40	28342	66876	70	28342	56980
18	458	-40	45492	66945	70	43897	57049
19	458	-40	29879	66945	70	28752	57049
20	458	-40	21894	66945	70	21894	57049
21	456	-40	36657	66979	70	36657	57084
22	455	-40	27264	66997	70	27264	57101
23	427	-40	24590	67480	70	24590	5734
24	402	-40	23978	67911	70	23978	58015
25	402	-40	67738	67911	70	67738	58015
26	374	-40	79612	68199	70	79612	58303
27	257	-40	101658	69340	70	100911	59444
28	257	-40	75057	69340	70	74789	59444
29	386	-40	7628	68082	70	7628	58186
30	386	-40	21998	68082	70	18692	58186
31	386	-40	33975	68082	70	33975	58186
32	386	-40	13982	68082	70	13982	58186
33	344	-40	48861	68491	70	48861	58596
34	344	-40	47487	68491	70	44142	58596

X1-G27



TABLE 5 (CONT.)

ACCIDENT STRESS RANGE EVAL. NORM. CYCLE ALL DROPS AND POST FIRE

STRESS RANGE DATA LOAD CASE 21 USED AS REFERENCE

LOC	MAX TEMP	MIN TEMP	STRESS RANGE	ALLOWABLE STRESS	MIN TEMP	STRESS RANGE	ALLOWABLE STRESS
1	439	-40	45332	67273	70	45332	57377
2	435	-40	81556	67342	70	81556	57446
3	433	-40	50929	67807	70	50929	57912
4	381	-40	42656	68131	70	39859	58235
5	257	-40	69614	69340	70	69614	59444
6	257	-40	84243	69340	70	84243	59444
7	476	-40	71032	66634	70	60620	56739
8	471	-40	66807	66721	70	56613	56825
9	459	-40	45119	66928	70	40592	57032
10	435	-40	42519	67342	70	36961	57446
11	561	-40	81819	65168	70	71238	55273
12	556	-40	98601	65254	70	98601	55359
13	514	-40	45450	65979	70	40679	56083
14	490	-40	55212	66393	70	55212	56497
15	327	-40	71356	68657	70	71356	58762
16	327	-40	71349	68657	70	71349	58762
17	462	-40	37146	66876	70	36826	56980
18	458	-40	54901	66945	70	53315	57049
19	458	-40	45261	66945	70	41487	57049
20	458	-40	28721	66945	70	28721	57049
21	456	-40	58228	66979	70	58228	57084
22	455	-40	54178	66997	70	54178	57101
23	427	-40	23330	67480	70	22630	57584
24	402	-40	32674	67911	70	32674	58015
25	402	-40	94067	67911	70	94067	58015
26	374	-40	96600	68199	70	81719	58303
27	257	-40	55554	69340	70	54807	59444
28	257	-40	64273	69340	70	64273	59444
29	386	-40	12351	68082	70	12351	58186
30	386	-40	32328	68082	70	29022	58186
31	386	-40	51373	68082	70	51373	58186
32	386	-40	20718	68082	70	20718	58186
33	344	-40	44312	68491	70	44312	58596
34	344	-40	73586	68491	70	70241	58596

XI-G28

TABLE 5

(CONT.)

5/76

ACCIDENT STRESS RANGE EVAL. NORM. CYCLE ALL DROPS AND POST FIRE

STRESS RANGE DATA LOAD CASE 22 USED AS REFERENCE

LOC	MAX TEMP	MIN TEMP	STRESS RANGE	ALLOWABLE STRESS	MIN TEMP	STRESS RANGE	ALLOWAB STRES
1	439	-40	55169	67273	70	55169	57377
2	435	-40	75549	67342	70	75549	57448
3	408	-40	54811	67807	70	54811	57911
4	381	-40	56037	68131	70	53240	58235
5	257	-40	55412	69340	70	55412	59444
6	257	-40	75260	69340	70	75260	59444
7	476	-40	49723	66634	70	39311	56739
8	471	-40	44580	66721	70	35717	56825
9	459	-40	38100	66928	70	33572	57032
10	435	-40	32942	67342	70	30736	57446
11	561	-40	65659	65168	70	55078	55273
12	556	-40	83069	65254	70	83069	55359
13	514	-40	40946	65979	70	37569	56083
14	490	-40	56844	66393	70	56844	56497
15	327	-40	76995	68657	70	76995	58762
16	327	-40	77040	68657	70	77040	58762
17	462	-40	31553	66876	70	31553	56980
18	458	-40	58194	66945	70	56604	57049
19	458	-40	31880	66945	70	28106	57049
20	458	-40	21734	66945	70	21734	57049
21	456	-40	32969	66979	70	32969	57081
22	455	-40	32291	66997	70	32291	57101
23	427	-40	31877	67480	70	31877	58101
24	402	-40	28911	67911	70	28911	58011
25	402	-40	101845	67911	70	101845	58011
26	374	-40	123560	68199	70	108679	58301
27	257	-40	77050	69340	70	77050	59444
28	257	-40	63169	69340	70	63169	59444
29	386	-40	14664	68082	70	14664	58181
30	386	-40	21605	68082	70	18299	58181
31	336	-40	38378	68082	70	38378	58181
32	386	-40	26151	68082	70	26151	58181
33	344	-40	62757	63491	70	62757	58591
34	344	-40	51010	63491	70	47655	58591

X1-G29

# ANSYS SOLUTIONS FOR INPUT TO BUCKLING SOLUTION - NORMAL CONDITIONS AND PUNCTURE CONDITIONS.


THE SMALL ANSYS MODEL OF THE CASK SHELLS (SEE SARP, XI-3-58) WAS USED TO DETERMINE THE STATE OF STRESS AND STRAIN IN THE CENTRAL PLANE OF THE CASK FOR THE FOLLOWING TWO CONDITIONS:

CASE A: 70KW 130°F NORMAL CONDITIONS  
16.5 PSI IN FUEL CAVITY  
140 PSI IN WATER CAVITY

CASE B: 70KW 130°F NORMAL CONDITIONS  
16.5 PSI IN FUEL CAVITY  
800 PSI IN WATER CAVITY

FOR THE SOLUTIONS THE STRESS-STRAIN CURVES OF SARP FIG. 3.8.3-11 FOR STAINLESS STEEL AND SARP FIG. 4.9.6-13(a) & (b) FOR LEAD WERE USED.

TABLES 6 & 7 PRESENT THE RESULTS OF THESE SOLUTIONS. THESE TABLES SHOW THE COMPONENT STRESSES, ELASTIC STRAINS AND PLASTIC STRAINS FOR EACH ELEMENT OF THE MODEL. THE MODEL GEOMETRY IS SKETCHED BELOW.

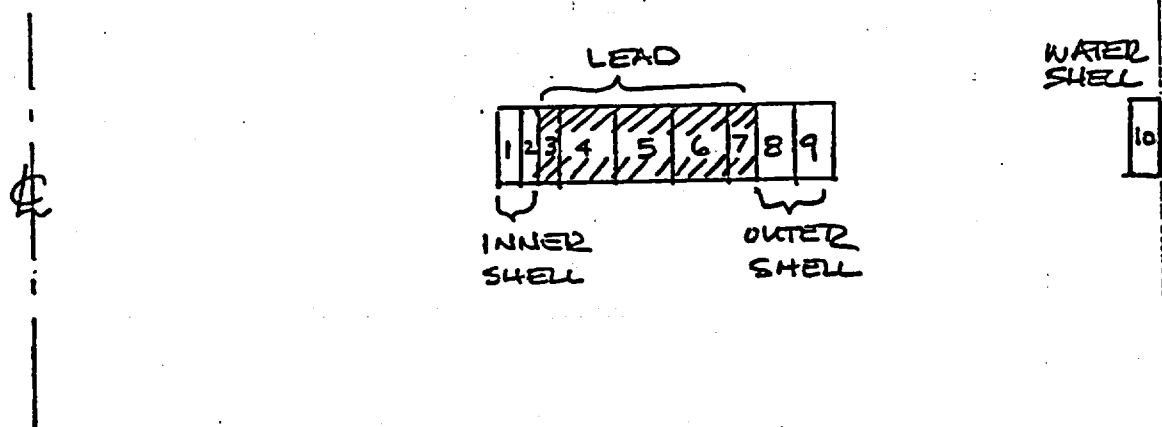

STRESSES, ELASTIC & PLASTIC STRAINS FOR SOLUTION A  
(70 KW, 130°F NODAL, 16.5 PSI FUEL CAVITY, 140 PSI WATER CAVITY)

TABLE 6

574A-74-1C

5/76

ELEM. NO.	$\sigma_R$ (RADIAN)	$\sigma_x$ (AXIAL)	$\sigma_\theta$ (HOOP)	$\epsilon_R$ $\times 10^2$	$\epsilon_x$ $\times 10^6$	$\epsilon_\theta$ $\times 10^6$	$\epsilon_R$ $\times 10^6$	$\epsilon_x$ $\times 10^6$	$\epsilon_\theta$ $\times 10^6$
1	-235	-16930	-18174	387.9	-429.8	-490.8	385.4	-195.5	-191.9
2	-580	-17235	-18181	380.4	-438.0	-484.3	360.5	-185.4	-175.1
3	-598	-733	-762	25.0	-81.9	-105.3	1904.0	-978.6	-925.4
4	-606	-756	-782	30.1	-87.2	-107.4	1367.9	-764.4	-603.5
5	-623	-795	-810	36.4	-96.6	-108.5	719.5	-481.9	-237.5
6	-638	-872	-811	45.8	-133.1	-86.2	131.4	-175.6	44.2
7	-641	-758	-641	-21.1	-109.3	-20.8	-179.8	10.0	178.8
8	-555	-622	4669	-66.0	-69.2	187.3	0.0	0.0	0.0
9	-304	4680	9726	-172.1	68.9	313.0	0.0	0.0	0.0
10	-71	9681	7510	-193.7	276.0	171.4	0.0	0.0	0.0

X1-631

STRESS, ELASTIC & PLASTIC STRAINS FOR SOLUTION B  
(70 KW, 130°F NORMAL, 16.5 FUEL CAVITY, 800 PSI WATER)

ELEM. NO.	$\sigma_r$ (RADIAL)	$\sigma_x$ (AXIAL)	$\sigma_\theta$ (HOOP)	$\epsilon_R^E$ $\times (10)^{-6}$	$\epsilon_x^E$ $\times (10)^{-6}$	$\epsilon_\theta^E$ $\times (10)^{-6}$	$\epsilon_R^P$ $\times (10)^{-6}$	$\epsilon_x^P$ $\times (10)^{-6}$	$\epsilon_\theta^P$ $\times (10)^{-6}$
1	-409	-17646	-21941	432.2	-412.3	-622.7	774.4	-282.6	-491.8
2	-761	-17937	-21962	422.4	-419.1	-616.2	737.0	-275.9	-461.1
3	-732	-940	-990	54.1	-110.6	-150.0	2299.1	-1021.5	-1277.6
4	-745	-971	-1016	60.0	-117.1	-152.6	1725.1	-806.1	-919.0
5	-768	-1019	-1056	67.2	-127.1	-155.4	1033.0	-523.0	-510.0
6	-790	-1074	-1087	74.4	-142.3	-152.7	411.9	-237.9	-174.0
7	-795	-1133	-1047	75.3	-180.3	-115.3	-10.2	0.0	9.8
8	-843	-5065	-3457	63.9	-140.8	-62.8	0.0	0.0	0.0
9	-844	225	1830	-54.3	-2.6	75.0	0.0	0.0	0.0
10	-400	20275	39514	-559.2	280.0	1207.1	-2214.4	-75.9	2290.4

XI-632

TABLE 7

5/14-74-1C

5/76

*Section XII*

---

**SECTION XII**  
**COOLING SYSTEM DESIGN**

**THIS PAGE INTENTIONALLY LEFT BLANK**



## SECTION XII

### COOLING SYSTEM DESIGN

#### INTRODUCTION

This section discusses the operation and performance of a redundant auxiliary cooling system. Subsequent events in the package design resulted in a lower decay heat load limit. Consequently the package temperatures became less important to the facility receiving spent fuel and the need for auxiliary cooling becomes optional.

The following section has not been revised and/or expanded to cover the optional arrangements since package integrity is not dependent on auxiliary cooling.

THIS PAGE INTENTIONALLY LEFT BLANK

## SECTION XII

### COOLING SYSTEM DESIGN

#### 1.0 Design Basis

The NLI 10/24 rail cask is designed to dissipate decay heat under normal conditions of transport without any dependence on auxiliary cooling. Under these conditions, highest average fuel temperature would run on the order of 833 °F, and the cask body average temperature would be on the order of 350 °F since decay heat is transferred through the cask body. While this presents no problem from the standpoint of meeting 10 CFR 71 requirements, it may prolong the cask cooldown time at the fuel reprocessing plant. For this reason the fuel shipment is cooled mechanically during transport to remove decay heat at the cask cavity wall. This results in very low cask operating temperatures and a highest average fuel temperature on the order of 600 °F.

The rail car mounted cooling system developed for use with the NLI 10/24 cask is designed to meet the following general criteria:

- o Loss of any single active or passive component does not result in loss of auxiliary cooling.
- o System components and supports are designed to meet the rail shock and vibration environment.
- o Lowest possible cask operating temperatures are achieved without sacrificing simplicity of design.

## 2.0 General System Description

Heat is transferred from the cask to an external heat exchanger by an intermediate cooling water stream and thence rejected to the atmosphere. Water is forced through channels provided on the outside of the fuel cask's inner shell where the decay heat is transferred to it by conduction and convection. A forced-draft, air-cooled exchanger removes the heat from the cooling water and the water is returned to the cask in a closed circuit. Ambient extreme conditions from 130°F to -40°F were considered for the design.

Equipment supports and mounts are designed for all normal forces and accelerations reported for rail transport service.

The fuel cask's design provides for two (2) separate, independent coolant flow paths. The heat transfer surface of each path is sized for the total decay heat removal. The external coolant system components will be assembled in modules. Two (2) identical modules provide 100% redundancy. Each module contains a heat exchanger, forced circulation pump, diesel engine driven generator, and a fuel system sized for 14 days continuous operation. A general arrangement of system components and piping is shown on Drawing 70654F.

### 3.0 Process Description

Flow sheet 70640F shows the main coolant loops and the auxiliary diesel generator systems.

The main coolant flow is through the fuel cask coolant channels, air-cooled heat exchanger, expansion tank, and circulation pump. Normally the pump forces water through the loop, which results in a temperature increase at the fuel cask. The exchanger is sized to reject the heat under this mode of operation to an extreme ambient temperature of 130°F in still air. Since the ambient will only be at 130°F a small fraction of the total operating time there is a potential saving in power if the exchanger can be arranged for fan free operation at lower ambients and when the train's forward motion induces large air flows. The temperature of the coolant at the exchanger exit is sensed and used to activate a switch which shuts off the exchanger fan in the exchanger fan plenum on dropping temperature. On rising temperature the fan is started.

Low coolant flow or high coolant temperature at the exit of the cask signals a system failure, and automatically starts the spare coolant system. Since each system is sized for 100% duty, there is no loss of cooling capacity for this condition. In addition to two (2) redundant coolant loops there is a back up for double failure. The air-cooled exchangers are each sized to dissipate 1/2 the design heat load at the extreme ambient in their natural draft mode of operation acting as steam condensers. The equipment is located so that a natural-current

thermosyphon will start circulating in each of the loops when the coolant temperature reaches 250°F.

The diesel generators are each provided with storage batteries for self starting. Individual fuel tanks are provided, each with capacity for 14 days continuous operation at twice the calculated average fuel consumption. Electric heaters in the fuel system and in the engine crankcases will assist winter starting at -40°F.

### 3.1 Forced Circulation Mode (power on)

Either air-cooled heat exchanger is designed to remove 120 kw from the cask. This is almost twice the cask rated heat load and allows for possible future upgrading of cask decay heat. A flow of 82 gpm is circulated through the system. The cooling fluid is heated in the cooling channels located on the outside of the inner shell. The fluid is then circulated back to the heat exchanger where it is cooled by air forced across the finned tubes by a fan.

The twenty (20) cask coolant channels are half rounds of 1.0" dia, schedule 40 stainless steel pipe. Ten (10) channels are for one system and ten (10) for the back up system.

### 3.2 Natural Circulation Mode (power off)

Two (2) air-cooled heat exchangers will be used at the same time as condensers when there is no power to drive the fans. Each flow loop produces a steam-water flow rate of 866 lb/hr of which 212 lb/hr is vapor at 250°F. Coolant flow is by natural circulation due to the density differences between cask and heat exchanger regions.

#### 4.0 Description of Operation

##### 4.1 Initial Start Up

After a new cask is set in place, flexible hoses are made up to the appropriate connections. Pure water and chemical additive are added through the fill nozzle at the expansion tank. The nozzle, which is the system high point and also serves as a vent, is left open. Coolant System "A" is started in its manual mode of operation. Circulation through the loop will scavenge trapped air in the system and heating of the water will drive off dissolved gas. The expansion tank is designed to promote deaeration. System "B" is filled and the circulation pump turned on briefly to scavenge trapped air in the system.

Flow meters F-101 & 102 are installed for checking of the system prior to shipment of the railcar and are not intended for normal operation. (The flow meter bypass must be opened before car shipment since the meters will restrict natural circulation operation on loss of power).

##### 4.2 Normal Operation

Normally the fuel cask cooling system operation is fully automatic and no operator attendance is required. In case of equipment failure the spare system is started without any operator action.

A battery operated panel which denotes any cause of failure is provided for observation at the rail terminal.

#### 4.3 Emergency Operation

In the event of stoppage of both coolant systems due to failure of pumps or generators the change over to the thermosyphon mode of cooling takes place without any manual adjustments. On pump failure, but not electric power failure, the exchanger fans will continue to operate.

As the temperature rises, excess pressure will build up which will be relieved by pressure relief valve PSV 160 and 161. When enough fluid has been blown off to allow the heat exchanger to act as a steam condenser a thermosphyon will start. At this time heat from the fuel cask will be removed as latent heat in steam at 29.8 psia and 250°F.

In designing equipment several provisions had to be made to facilitate this emergency mode of operation. The expansion tank had to be designed and placed so that during the normal mode of operation it is the system high point to facilitate filling and venting. During the emergency mode of operation, after the system inventory is reduced by pressure relief, it must allow operation of the air-cooled condenser without flooding. Pipe lines are arranged to drain



from the condenser to the cask without pocketing to preclude surging. The pump will act as a pipeline fitting during emergency and is selected for low pressure drop when idle.

#### 4.4 Extreme Ambient Temperature Operation

As the ambient temperature falls the coolant system will automatically adjust to low temperature operation. The diesel engines crankcases and the diesel fuel tanks are provided with thermostatically operated electric heaters. The electric heaters are immersion type NEMA rated explosion proof.

At 40°F ambient the standby coolant loop starts so that the cask's decay heat can be used to protect the standby loop from freezing.

The system has been designed to operate with glycol solution as well as water to allow return trips of the empty casks under freezing conditions.

Based on the recommendations of Union Carbide Corporation, Terrytown Technical Center, UCAR Thermofluid 17 will be the antifreeze solution used. The mix shall be  
(XII-7)

54% by weight of UCAR Thermofluid 17 and 46% by weight water.

UCAR Thermofluid 17 is an inhibited ethylene glycol based antifreeze. The inhibitors used in this solution are proprietary to Union Carbide.

Union Carbide has performed corrosion tests on a large number of metals with uninhibited ethylene glycol. These tests show that corrosion effects on stainless steel are negligible as long as the ethylene glycol does not degrade thermally or oxidatively to form acidic materials. The purpose of the inhibitors is to prevent thermal and oxidative degradation of the ethylene glycol. Satisfactory performance can be maintained in the fluid by keeping its pH in the prescribed range (8 to 10). A lower pH is indicative of fluid degradation and acidic build-up. If a cooling system fails during transportation, the pH of the fluid will be checked to assure it is still in the prescribed range of 8 to 10. If it is not, the cooling system will be drained, flushed and refilled. Also, during normal cooling system maintenance, the pH will be checked.

The maximum flow rate in the cooling system is 82 gpm. This is not sufficient to cause any erosion of the metal surfaces.

### *Section XIII*

---

**DELETED**

**QA/QC shall be in accordance with Nuclear Assurance Corporation's Quality Assurance Manual as approved by the NRC. Quality Assurance Program Approval for Radioactive Material Packages Number 0018, Revision 3.**

**QUALITY ASSURANCE PLAN SUMMARY**

**SECTION XIII**

THIS PAGE INTENTIONALLY LEFT BLANK



UNITED STATES  
NUCLEAR REGULATORY COMMISSION  
WASHINGTON, D. C. 20555

FEB 12 1991

SGTB:LLG  
71-0018


Nuclear Assurance Corporation  
ATTN: Mr. George N. Dixon, Jr.  
Corporate Manager Quality Assurance  
6251 Crooked Creek Road  
Norcross, GA 30092

Dear Mr. Dixon:

Enclosed is Quality Assurance (QA) Program Approval for Radioactive Material Packages No. 0018, Revision No. 3.

Please note the conditions in the approval.

Sincerely,

  
Charles E. MacDonald, Chief  
Transportation Branch  
Division of Safeguards  
and Transportation, NMSS

Enclosure:  
As stated

0018

3

**QUALITY ASSURANCE PROGRAM APPROVAL  
FOR RADIOACTIVE MATERIAL PACKAGES**

Pursuant to the Atomic Energy Act of 1954, as amended, the Energy Reorganization Act of 1974, as amended, and Title 10, Code of Federal Regulations, Chapter 1, Part 71, and in reliance on statements and representations heretofore made in Item 5 by the person named in Item 2, the Quality Assurance Program identified in Item 5 is hereby approved. This approval is issued to satisfy the requirements of Section 71.101 of 10 CFR Part 71. This approval is subject to all applicable rules, regulations, and orders of the Nuclear Regulatory Commission now or hereafter in effect and to any conditions specified below.

## 2. NAME

Nuclear Assurance Corporation

## STREET ADDRESS

6251 Crooked Creek Road

## CITY

Norcross

## STATE

GA

## ZIP CODE

30092

## 3. EXPIRATION DATE

February 28, 1996

## 4. DOCKET NUMBER

71-0018

## 5. QUALITY ASSURANCE PROGRAM APPLICATION DATE(S)

January 24, 1991

## 6. CONDITIONS

Activities conducted under applicable criteria of Subpart H of 10 CFR Part 71 to be executed with regard to transportation packages.



FOR THE U.S. NUCLEAR REGULATORY COMMISSION

*Charles E. MacDonald*  
Charles E. MacDonald

FEB 12 1991

DATE

CHIEF, TRANSPORTATION BRANCH  
DIVISION OF SAFEGUARDS AND TRANSPORTATION  
OFFICE OF NUCLEAR MATERIAL SAFETY AND SAFEGUARDS

## *Section XIV*

---



**SECTION XIV**  
**FUNCTIONAL TESTING**

**THIS PAGE INTENTIONALLY LEFT BLANK**

## SECTION XIV

### FUNCTIONAL TESTING

#### Table of Contents

1.0	Assembly of All Components to Cask
2.0	Trunnion Load Test
3.0	Test for Shielding Integrity
4.0	Leak Tests
5.0	Assembly of cask to rail car
6.0	Thermal Tests
7.0	Disassembly
8.0	Inspection of Lead to Steel Bond

**1.0 Assembly**

- 1.1 Assemble fuel basket into cask cavity. Assure that basket does not bind and dimensionally check that basket is fully seated.
- 1.2 Assemble spacer plug into cask cavity.
- 1.3 Lower inner closure head over guide pins and onto cask body flange. Use lift yoke for this operation. Assure that there is no interference between closure head and spacer plug and that closure head has been seated firmly on cask. Install closure head bolts (Remove guide pins).
- 1.4 Assemble outer head, install outer head bolts.

**2.0 Load Test**

- 2.1 Engage two lift trunnions with cask lift yoke. Using load test fixtures in conjunction with lift yoke apply 400,000 lbs. load.
- 2.2 Upon completion of load test disengage lift yoke and engage opposite two trunnions and repeat test described in 2.1 above.
- 2.3 Remove lift yoke after second load test and liquid penetrant test four trunnions and their connection to cask for cracks. Visually check for galling, scaring and any signs of deformation of the trunnions and lift yoke.

**3.0 Shielding Integrity**

- 3.1 The cask shielding integrity shall be tested using the gamma scan and/or gamma probe method using a Co<sup>60</sup> source and

## Functional Testing.

scintillation equipment. The test will encompass, nominally, 100% of all accessible surfaces of the cylindrical shield.

### 3.2 Acceptance Criteria

Acceptance will be based on a 12" square mock up of the shield wall whose thickness will be equivalent to the minimum design thickness less 5%.

Any of the following conditions will be cause for rejection.

1. Loss of shielding greater than 5% of the design thickness.
2. Loss of shielding up to 5% of the design thickness over an area greater than 6 square inches.
3. The total of all such areas (Criteria #2) shall not exceed 25% of the total area inspected.

**NOTE:** The above testing will be accomplished prior to the installation of the neutron shield jacket.

**THIS PAGE INTENTIONALLY LEFT BLANK**

## Functional Testing

### 4.0 Leak Tests

#### 4.1 Cask Closure Head Seals

The purpose of this tests is to assure the sealing integrity of the closure head seals only, as all the joints in the cask will have been previously inspected using helium and a mass spectrometer and to the same acceptance standards listed herein.

##### 4.1.1 Inner Closure Head

Remove the quick disconnect from the drain line valve and install a calibrated pressure gage. Using the inlet valve, pressurize the cask cavity to 5 psig using clean dry helium. Using a sniffer probe connected to a mass spectrometer scan the joint between the inner head diameter.

## Functional Testing

and the cask wall, moving at a rate not to exceed 15 inches per minute. A leak rate greater than  $1 \times 10^{-6}$  STP cc/sec. will be cause for rejection.

### 4.1.2 Outer Closure Head Seal

Both closure head and seals are to be in place during this test. Using the closure head cavity drain line pressurize the cask cavity between the inner and outer head to 5 psig using clean dry helium. Using a sniffer probe connected to a mass spectrometer, scan the joint between the outer head diameter and the cask wall, moving at a rate not to exceed 15 inches per minute. A leak rate greater than  $1 \times 10^{-6}$  STP cc/sec. will be cause for rejection.

## 4.2 Water Jacket

4.2.1 Remove relief valve and replace with a calibrated pressure gage. Connect pump and supply of distilled water to the quick disconnect valved coupling on the water jacket. Open the vent line at the top end of water jacket. Fill the water jacket with distilled water until overflow occurs through vent line. Close vent line and pressurize water jacket to 300 psig. Close water supply



## Functional Testing

valve. Monitor pressure gage for 30 minutes.

Followed by a visual inspection of all joints.

Any drop in test pressure or leaks will be cause for rejection.

### 4.3 Water Jacket Expansion Tank

4.3.1 Remove relief valve and replace with calibrated pressure gage and vent valve assembly. Connect pump and supply of distilled water to inlet on expansion tank. Fill expansion tank with distilled water until overflow occurs through vent valve. Close vent valve and pressurize expansion tank to 300 psig. Close water supply valve. Monitor pressure gage for 30 minutes. Followed by a visual inspection of all joints. Any drop in test pressure or leaks will be cause for rejection.

### 4.4 Containment Vessel Valves

The containment valves are made up of three components; base plate, valved quick disconnect fitting and a cap which completely encloses the quick disconnect fitting and is bolted to the base plate. The primary containment seals are those seals which seal the base plate to the cask flange and the cap to the base plate. The base plate and cap seals shall be subjected to the following leak tests.

## Functional Testing

The base plate shall be bolted to the cask flange and a helium leak test performed at this level of assembly. After the base plate has been tested and accepted the cap shall be bolted in place and the cap seal subjected to a helium leak test. A leak rate greater than  $1 \times 10^{-6}$  STP cc/sec will be cause for rejection. Acceptance criteria applies to both components and is a test of the metal "O" ring seals used in both components.

### 4.5 Water Jacket and Expansion Tank Relief Valves

The relief valves; (1) Water Jacket, (1) Expansion Tank; shall be bench tested to verify cracking and reseating pressures. Allowable variation is  $\pm 5\%$  of 220 psig nominal cracking pressure.

### 4.6 Cask Cavity Hydrostatic Pressure Test

Full cask cavity with distilled water. Pressurize cask cavity thru cavity drain valve to 350 psig. and hold pressure for 30 minutes. There shall be no evidence of leakage or pressure drop during the test period.

### 4.7 Impact Limiter Housing

Both front and rear impact limiter housings will be tested for leak tightness. Each limiter housing will be purged and filled with dry helium at 10 psig. All weld joints will be bubble tested and shall exhibit no evidence of leakage.

## 5.0 Assembly of Cask to Rail Car

- 5.1 Using lifting yoke, position cask over turning saddle on rail car. Lower cask engaging bearing blocks on turning saddle with trunnions on bottom end of cask. Continue downward allowing the cask to rotate to a horizontal position and seating on the hydraulic jack at the top end of the cask. Attach top end impact limiter and lower the cask using the hydraulic jack to bring the impact limiter into contact with the support saddle. Install tie-down link pin at top end of cask. Raise bottom end of cask using the hydraulic jack to disengage the turning saddle. Remove the turning saddle and install the bottom impact limiter. Lower bottom end of cask using the hydraulic jack to engage the

THIS PAGE INTENTIONALLY LEFT BLANK

## Functional Testing

support saddle. Install tie-down link pin.

Assure the following :

- 5.1.1 Free engagement of trunnions in bearing blocks.
- 5.1.2 Operation of hydraulic jacks.
- 5.1.3 Engagement of top and bottom end of cask in support saddle
- 5.1.4 Fit of tie-down link pins.
- 5.1.5 Clearances between the cask and the lift yoke when cask is lowered into horizontal position.
- 5.1.6 Fit of top and bottom impact limiters.
- 5.1.7 The cask clears the sides of the personnel barrier as it is being lowered to the horizontal position.
- 5.2 Bring the roof sections of the personnel barrier into their closed position. Assure that there is no interference between the cask and the personnel barrier roof.

## 6.0 Thermal Test

The thermal test is outlined in Section XV. If the rail system is equipped with auxiliary cooling the functional test of the cooling system will be carried out as part of the thermal test procedure.

## 7.0 Disassembly

Upon completion of all the tests, the cask shall be removed from the Rail Car, disassembled, cleaned, reassembled, and returned

## **Functional Testing**

to the Rail Car.

The following inspections shall be made during these operations :

- 7.1 Ease of disassembly.
- 7.2 Check all fasteners and threaded holes for galling, undue wear, burred threads and stripped threads.
- 7.3 Scoring or marking of any of the components indicating interference with other components.
- 7.4 Distortion or damage of any of the load carrying surfaces.

If any of the conditions listed in 7.1 through 7.4 do exist, corrective action shall be taken to eliminate the contributory factors.

## **8.0 Inspection of Lead to Steel Bond**

- 8.1 Ultrasonic inspection methods (pulse echo type or equivalent) shall be used as a means of determining the continuity or lack of continuity at the lead to steel interface. Inspection will be performed over 100% of the accessible areas which require lead to steel bonding.

### **8.2 Acceptance Criteria**

The total area of unbond for those surfaces requiring lead to steel bond shall not exceed 25% of all areas accessible for testing. No single area of unbond shall exceed 3 square feet and shall be separated from other such areas of unbond by a minimum distance of 12 inches.

NOTE: The above testing will be accomplished prior to the installation of the neutron shield jacket.

#### 9.0 Prototype Rail Car Test

The prototype car will be fitted with the cask support and tie-down arrangement as described in this safety analysis report. A set of neutron shield expansion tanks, connecting lines and supports will also be fitted to the prototype car for testing. A simulated cask structure of approximately the same dimensions as the actual cask will be positioned on the car in the same manner as the actual cask. The mass and location of center of gravity of the simulated cask structure will be the same as the actual cask.

The prototype car loaded as described above shall be subjected to a series of static and impact tests as defined by the Association of American Railroads, "Specification for Design, Fabrication and Construction of Freight Cars."

AAR requires a visual inspection of the prototype car be made after each static test and after each impact test. Any permanent damage, to any part of the car, found before or after all tests are completed will be sufficient cause for disapproval of the design. Damage will be considered permanent when the car requires repair in order to return the car to running condition.

The arrangement which supports and ties the cask to the rail car shall be visually inspected. The support and tie down arrangement of the neutron shield expansion tanks and associated piping shall also be visually inspected. Any sign of structural damage such as deformation, elongation of pin holes, or cracked welds will be cause for disapproval of the design.



*Section XV*

---

**SECTION XV**

**THERMAL ACCEPTANCE TEST PROCEDURE**

**THIS PAGE INTENTIONALLY LEFT BLANK**

## SECTION XV

### THERMAL TEST PROCEDURE

Thermal tests will be performed in accordance with detailed thermal test procedure to verify the thermal performance of the shipping cask. The thermal tests will also be used to establish operational parameters relative to preparing a loaded cask for shipment and unloading the cask at the reprocessing plant. Both fuel basket types, i.e., PWR and BWR, will be thermally tested. A cask will only be tested once with the basket type available at time of test. This section describes the thermal test used to verify cask performance and the temperatures used in the thermal stress analysis.

As established in Section VIII, "Thermal Analysis," the thermal response of the cask to PWR and BWR loadings are approximately equal. Therefore, the heat source for the thermal test shall be equivalent to the calculated decay heat source for the ten (10) PWR cask loading of 70kw. The heat source shall be provided by electrical heaters designed and located to simulate the active region of a fuel assembly. The heaters will be positioned such that the 144 inch active length falls within the limits of the neutron shield water jacket. A mockup of the cask closure heads shall be provided which will thermally simulate the top end of the cask. There will be additional penetrations in the closure head mockups to provide for heater leads and thermocouple wire installation.

The thermal tests are to be performed within an area which will be protected against drafts and large temperature changes. The cask shall be completely assembled on the rail car, i.e., the fuel basket, either PWR or BWR, installed in the cask cavity, closure head mockup with heater and thermocouple leads in place. The assembled cask will be positioned horizontally on the rail car to simulate the shipping attitude. The cooling system will be inoperative and drained for this test.

The assembled shipping cask will be instrumented so that temperatures and pressures of the various elements of the system can be monitored and at established time intervals all data will be recorded. To obtain the necessary temperature data, thermocouples will be installed inside the PWR fuel basket cavities, on the outer surface of the outer shell on the outside surface of the water jacket shell and on the ends of the cask.

The thermocouple locations and heater locations in the basket are shown in Figures 1 and 2. The following thermocouple will also be attached to the cask. (See Figure 3)

1. Seven sets of three thermocouples will be mounted circumferentially on the cask surface and on the outer surface of the outer shell on a plane equidistant from the ends of the heater active zone. As viewed from the end of the cask, one set would be mounted in the  $0^{\circ}$  and then every  $30^{\circ}$  to the  $180^{\circ}$  position.
2. A thermocouple at each end of the cask at the center of the top and bottom head.

3. One thermocouple positioned inside the cask cavity on the test head adjacent to the metal seal ring.
4. One thermocouple on the personnel barrier directly over the cask.

Thermocouples will be used to monitor ambient air temperatures on the inside and outside of the personnel barrier. A pressure gage will be mounted on the closure head to indicate cavity pressure. Once the cask and instrumentation are assembled and installed on the rail car, the heaters will be connected to a power source. 70kw will be supplied to the heaters and temperatures and pressures will be measured every half hour until equilibrium is reached. Thermal equilibrium is considered to have been achieved if the cask temperatures fail to rise more than 2°F over a two hour period. As confirmation the test will be conducted for an additional hour using the same criteria.

### Thermal Test Acceptance Procedure

The acceptance of the NL 10/24 cask from a heat dissipation standpoint will be determined as follows:

1. The cask will be tested at 70 kw using the procedures outlined in this section.
2. The TRUMP thermal models outlined in Section VIII, Appendices D and E\*, will be run at ambient conditions of the test and without solar heat load.
3. Acceptance of the cask will require the following comparison of the test and calculations:
  - (a) The measured temperatures shall not exceed the corresponding calculated values of the 2-D thermal model used in Appendix E of Section VIII.
  - (b) The average of the measured circumferential temperature differences between the inner shell and the outer shell shall not exceed the calculated  $\Delta T$  value of the 2-D model used in Section VIII Appendix E for that axial position in the cask.
  - (c) The change in temperature difference around the circumference of the cask at any axial measurement position in the cask shall not exceed that calculated from the circumferential model used in Section VIII Appendix E.

---

\* The temperature profiles resulting from the two different thermal models have been used in the structural analysis. The structural analysis shows the design criteria are met using temperatures resulting from both thermal models.

4. If the temperatures are consistently higher than those calculated in Item 2, the heat load of the cask will be lowered and new temperature measurements will be made. These measured temperatures will be used in the application of the criteria of Item 3 to determine the acceptable thermal rating of the cask.



**THIS PAGE INTENTIONALLY LEFT BLANK**

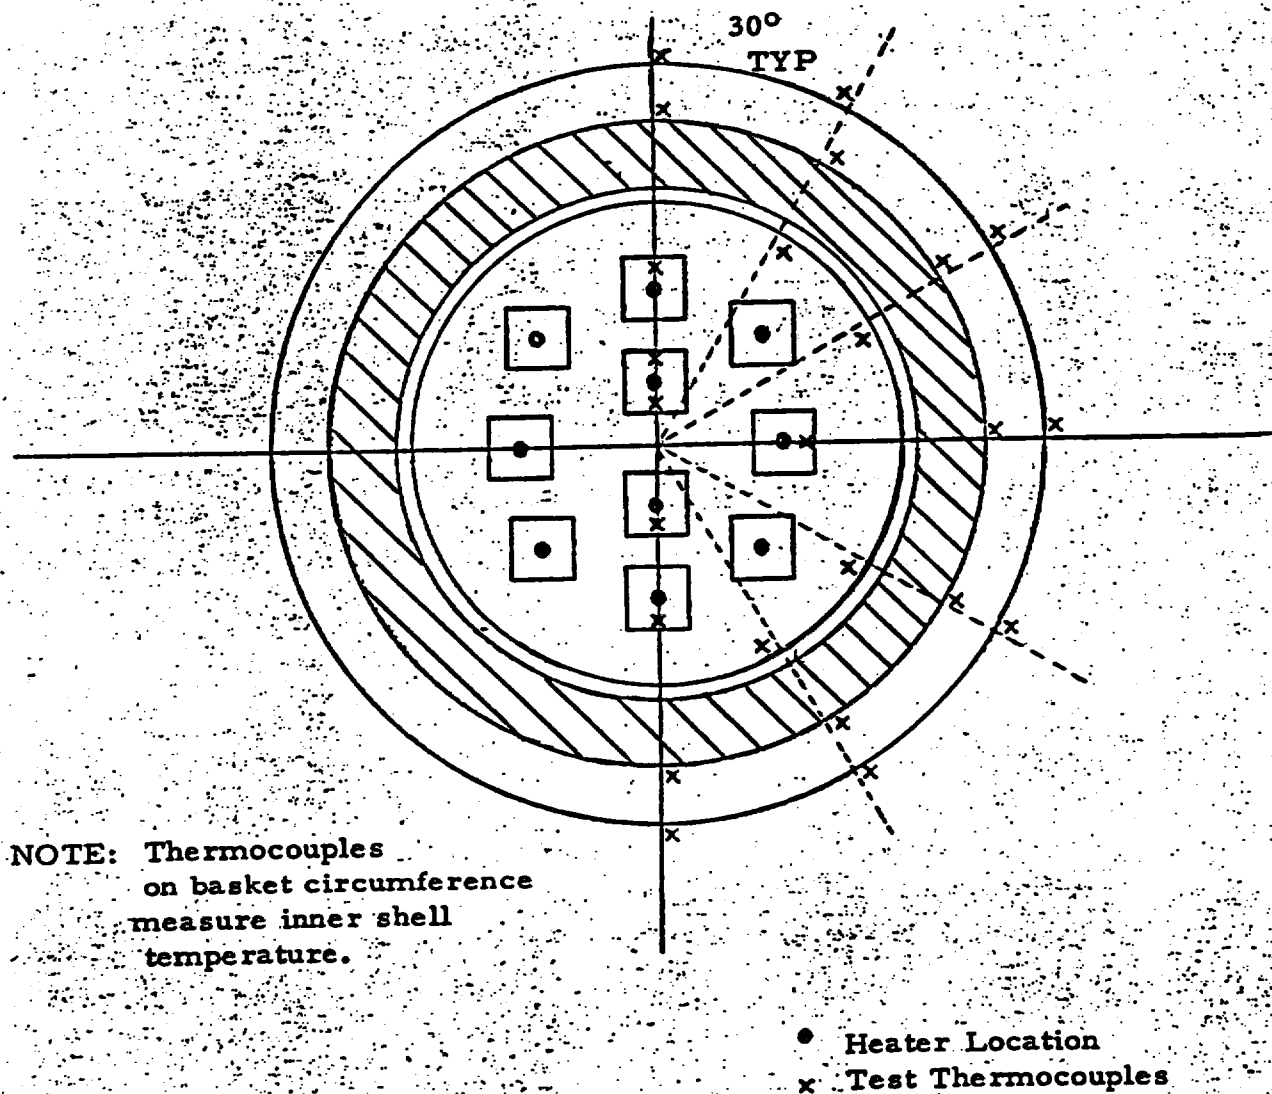


Figure 1 - Section AA PWR Basket

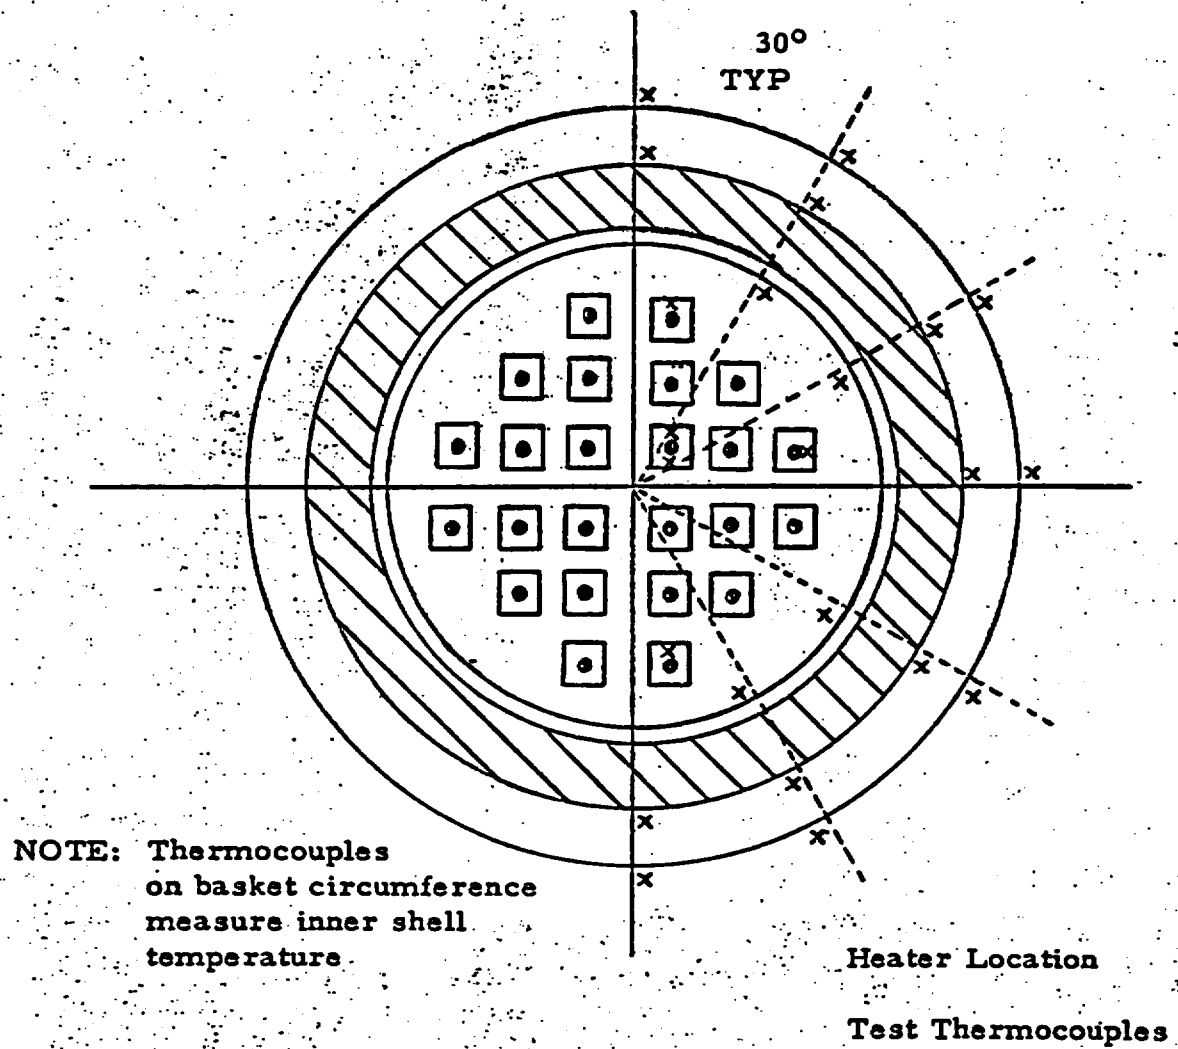


Figure 2 - Section A-A BWR Basket

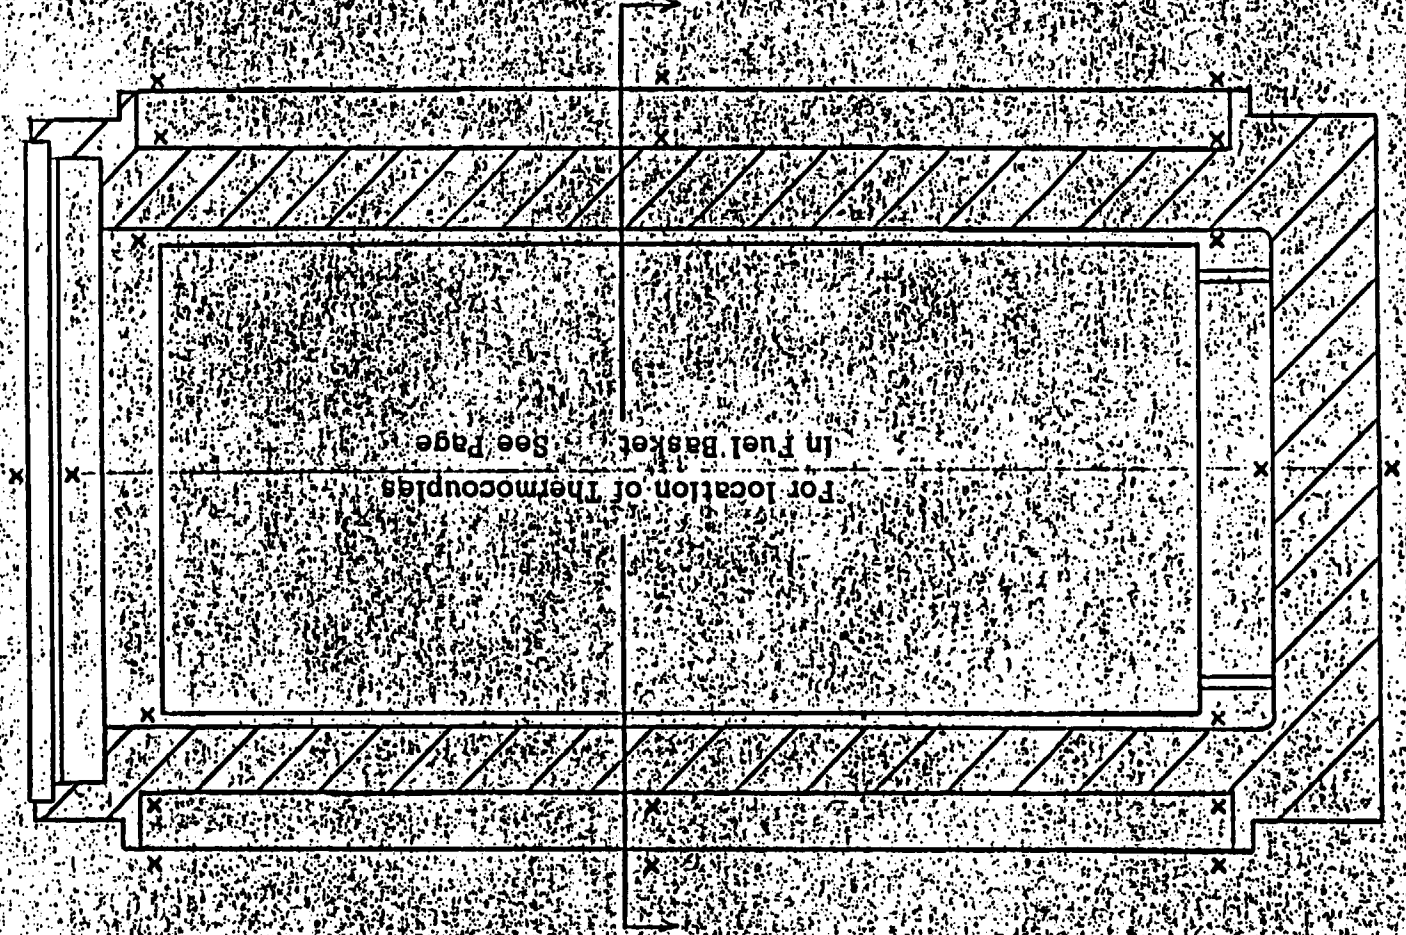


FIGURE 3 - Cask Body Thermocouple Locations

**THIS PAGE INTENTIONALLY LEFT BLANK**

*Section XVI*

---

**SECTION XVI**  
**OPERATING PROCEDURES**

THIS PAGE INTENTIONALLY LEFT BLANK



## **SECTION XVI**

### **OPERATING PROCEDURES**

#### **INTRODUCTION**

It is recognized that each nuclear station would have its own preferred sequence of operations for handling, loading, and preparing the spent fuel cask for shipment. This procedure is intended to be flexible, general one, identifying the operations to be performed.

Prior to delivery of the cask to the nuclear power station, the cask will be subjected to a series of pre-operational checks to assure all valves, instrumentation, seals and auxiliary equipment are functioning correctly; and that the required cask internals have been properly installed. Complete operating procedures and instruction manuals will be furnished.

OPERATING PROCEDURES**A. Preparation of Cask for Loading at Reactor Site**

1. Health Physics survey railcar and personnel barrier.
2. Visually inspect railcar and equipment for signs of damage. Note any discrepancy on shipping document.
3. Open personnel barrier.
4. Health Physics survey cask and adjacent surfaces of car.

NOTE "A"

If the neutron shield tank is connected to expansion tank, then Step 5 must be performed.

5. Disconnect water jacket expansion line from water jacket.
6. Position car for removal of cask. Set hand brakes and block wheels against movement in either direction.
7. Inspect cask and tie-downs for signs of damage. Complete receiving inspection portion of shipping document.
8. Release lifting yoke from its tie-down on railcar.

NOTE "B"

When the cask is shipped in an "Unloaded" condition, auxiliary cooling system does not operate, nor is it connected to the cask. Therefore, no connection between cask and cooling system need be broken at this time.

9. Remove rear ("B" End of car) tie-down pin and raise rear end (bottom of Cask). Remove impact limiter then move turning fixture into position and lower cask turning trunnions into the turning fixture bearing blocks, by retracting the rear jack.
10. Remove front ("A" End of car) tie-down pin and raise front end of cask. Remove front (top of cask) impact limiter.
11. Attach lift yoke to the lifting trunnions and raise cask to vertical position. Lift cask from car and set down in designated work area. Remove lifting yoke.
12. Remove outer closure head bolts. Remove 3 threaded plugs from top of closure head and replace with 3 threaded eyebolts.
13. Using shackles, attach lifting slings to 3 eyebolts on outer closure head. Remove outer closure head and set it on supports which are suitable for radiological control and maintaining the cleanliness of closure head. Carefully inspect outer head gasket. If seal shows any damage replace it. Be certain gasket is properly installed and seated. Note any damage or repairs in shipping document.
14. Remove nuts from inner closure head studs. Using shackles, attach lifting slings to 3 eyebolts on inner closure head. Remove inner closure head and set down on a clean surface for radiological control and maintaining the cleanliness of the closure head. Carefully inspect inner closure head gasket. If seal shows any damage, replace it. Be certain that replacement gasket is properly installed and seated. Note any damage or repairs on shipping document.
15. Remove containment vessel valve caps. Remove closure head cavity drain valve cover which is located at top side of cask.

## Operating Procedures

16. Remove fuel assembly spacer plug and set down on supports which are suitable for radiological control and maintaining of cleanliness of spacer plug.
17. Survey cask internals. Visually inspect cask cavity for foreign material, damage, etc. Note any discrepancy or repairs on shipping document.
18. Check specific gravity (by hydrometer) of fluid in neutron shield tank. The specific gravity must fall within the limits shown on the graph on page XVI-17. If the specific gravity is outside the required limits, add water or anti-freeze as necessary to adjust specific gravity.  
If fluid level is low, add antifreeze mixture in the proper concentration to fill the neutron shield tank.
19. Fill cask cavity with demineralized water up to level of inner closure head flange.
20. Engage cask lifting yoke with cask trunnions and pick up cask.
21. Position cask over spent fuel storage pool and slowly lower cask to bottom of pool. Wet cask surface using demineralized water prior to placing cask in storage pool.
22. Disengage lifting yoke from cask and remove yoke from spent fuel storage pool.

## B. Loading Fuel Into Cask at Reactor Site

1. Read identification number on top of fuel assembly. Record identification number on shipping document.
2. Pick up fuel assembly, using refueling grapple on refueling bridge.
3. Position refueling bridge over cask. Center fuel assembly over cask cavity. Carefully lower fuel assembly into cask. Release

## Operating Procedures

grapple from fuel assembly and raise to full up position. Confirm that fuel assembly is fully seated in cask. Move refueling bridge clear of cask. Record location of fuel assembly in fuel basket.

4. Repeat steps (1) through (3) above until cask is fully loaded.

C. Removal of Cask From Reactor Site Spent Fuel Pool and Preparation for Shipment

1. Install fuel assembly spacer plug into cask.
2. Attach three-legged sling to cask lifting yoke. Move over cask inner closure head. Attach three-legged sling to lifting eyes on outer surface of inner closure head using shackles.
3. Position inner closure head over cask and slowly lower onto cask flange. Guide pins of varying heights are located in the cask flange to provide initial and final alignment. Visually confirm that closure head is seated.
4. Lower cask handling yoke to slacken closure head cables which, in turn, locates yoke relative to cask trunnions. Engage cask trunnions and begin lifting.
5. Raise cask until closure head cavity drain valve is above water. Install all inner closure head nuts hand tight.
6. Hose cask down with demineralized water. Monitor radiation dose rate as cask emerges from pool. When all cask surfaces have been hosed, immediately move cask out of Fuel Pool to Decontamination Area. Set cask down. Remove lifting yoke and closure head lifting cables.
7. Connect hose from demineralized water supply to quick disconnect fitting on cavity fill line. Connect hose to quick disconnect fitting on cavity drain line with free end placed in pool water or contaminated drain. Open demineralized water supply valve and commence

## Operating Procedures

flushing the cask cavity.

8. Connect demineralized water supply to auxiliary cooling inlet at top of cask. Attach hose to auxiliary cooling outlet at top of cask. Discharge end of hose to be directed to suitable drain. Open demineralized water supply valve and continue to circulate water to drain.
9. Tighten all inner closure head nuts to specified torque.
10. Close demineralized water supply valve to cask cavity. Disconnect hose from demineralized water supply. Connect T-fitting with pressure gage and isolation valve to quick disconnect fitting on cavity fill line.
11. Connect helium bottle (with pressure regulated to 10 psig) to quick disconnect on isolation valve assembly. Open fill valve and isolation valve. Open helium supply valve for a few minutes to allow helium to push out a quantity of water from the cavity.
12. Pressurize cavity to 10 psig minimum. Remove drain hose from cavity drain line. Remove helium hose from cavity fill line. Flood closure head cavity until seal and all valves are completely covered. Hold for 10 minutes and watch for bubbles indicating leaks at closure head seal. If bubbles indicate leaks follow special instructions for correction. If not, drain closure head cavity, re-connect drain and helium supply lines.
13. Open helium supply valve. Allow helium flow to force out remaining cavity water until there is no further discharge from the cavity drain line. As water is flowing from cavity measure temperature of effluent. If water temperature is below 80°F, stop flow and wait for heat in fuel to raise water temperature to 80°F. Then apply helium pressure

## Operating Procedures

- and expel water until bubbles from discharge hose indicate that all water has been forced from cask. Close cavity fill and drain valves. Close helium supply valve. Remove helium supply line.
14. Pressure test seals in cavity fill and drain line valve base plates by pressurizing annulus between the double seal to 5 psig. Hold pressure for 10 minutes. If there is no drop in pressure seals are satisfactory.
  15. Crack cavity drain valve and bleed off excess pressure, vent to plant off gas system. Connect vacuum gauge to this valve and open it wide. Connect vacuum pump to cavity fill valve with line having vacuum gauge attached. Start pump and open valve. Evacuate cavity until pressure falls below 1" of Hg (.5 psi) on both gauges and remains there for 15 minutes. Valve off pump and hold static vacuum for 15 min. If pressure increase is negligible, close both valves. Reconnect helium line, open fill valve and recharge cavity with helium to just above atmospheric pressure. Close fill valve and disconnect helium line.
  16. Decontamination procedures are to be carried out while the above operations are taking place.
  17. Install valve caps on drain and fill valves. Pressure test seals in valve caps by pressurizing annulus between the double seal to 5 psig. Hold pressure for 10 minutes. If there is no drop in pressure seals are satisfactory.
  18. Attach three-legged sling to eyebolts on outer closure head. Position outer closure head on cask.

## Operating Procedures

19. Remove eyebolts from outer closure head and insert threaded metal plugs. Torque closure head bolts to specified foot-pounds.
20. Connect vacuum pump to closure head cavity drain valve. Connect exhaust side of vacuum pump to contaminated off gas system. Open the closure head cavity drain valve. Start vacuum pump and pump closure head cavity to 1.0 inch of mercury. Hold for 15 minutes. Operation must continue until supervisor determines that the vacuum gauge reads 1.0 inch of mercury. The supervisor shall verify that the operation has been performed correctly and will sign off the appropriate check list accordingly. Stop and disconnect vacuum pump. Allow pressure in closure head cavity to return to atmospheric. Close closure head cavity drain valve.
21. Connect pressure gage and isolation valve assembly to cavity drain valve. Connect compressed air supply line to isolation valve. Open isolation valve, open cavity drain valve.
22. Open compressed air supply and pressurize closure head cavity to 10 psig. Close air supply valve. Hold pressure for 10 minutes. If there is no drop in pressure, the outer closure head seal is satisfactory. Record results on shipping document.
23. Open isolation valve to relieve pressure in cavity. Remove pressure gage and isolation valve assembly.
24. Health Physics survey cask for surface contamination and radiation dose rates. If values are higher than those specified in shipping document, continue decontamination. Record final values on shipping document.
25. Install valve cover on the closure head cavity drain valve pocket.



## Operating Procedures

26. Attach lifting yoke to cask trunnions. Lift and move cask to railcar location and position cask over turning fixture bearing blocks.
27. Lower cask to railcar. Engage bearing blocks on turning fixture with trunnions on bottom end of cask. Lower cask to horizontal position, moving crane as required to keep crane cables vertical. Disengage cask lifting yoke from cask trunnions and set aside.
28. Elevate bottom end of cask using car mounted jacks. Disengage bearing blocks on turning fixture and move turning fixture to storage position.
29. Install bottom impact structure. Lower cask using jacks until impact structure seats in saddles. Install hold down pin.
30. Install top impact structure. Lower cask using jack until impact structure seats in saddles. Install hold down pin.
31. Connect cask water jacket to expansion tank by connecting flexible metal hose from expansion tank to quick disconnect fitting on water jacket.
32. Connect flexible pipe from auxiliary cooling unit to quick disconnects near top of cask. Open isolation valves. Start pump on auxiliary cooling unit No. 1. Check level in system expansion tank and fill low level mark with demineralized water, if required. Start fans on auxiliary cooling unit No. 1.
33. Repeat Step 32 for auxiliary cooling unit No. 2 when shipping configuration includes optional redundant system. Perform operational checks per check list to assure all components are functioning properly. Turn unit No. 2 off.
34. Close personnel barrier.
35. Paste shipping placards to outside of personnel barrier as required by 49 CFR 173.399.

## Operating Procedures

36. Perform final Health Physics survey of railcar system.
37. Return all decontaminated service equipment to storage.
38. Station Supervisor review shipping document for completeness and accuracy. Sign off as ready for shipment.

### D. Preparation of Cask for Unloading at Fuel Reprocessing Site

1. Health Physics survey railcar and personnel barrier.
2. Inspect railcar and personnel barrier for damage. Note any discrepancy on shipping document.
3. Position railcar for removal of cask. Set handbrakes and block wheels against car movement in either direction.
4. Open personnel barrier.
5. Health Physics smear test cask for surface contamination and adjacent surfaces of the railcar. Complete receiving portion of shipping document.
6. Disconnect water jacket expansion line from water jacket.
7. Inspect cask and tie downs for damage. Complete cask/railcar inspection portion of shipping document.
8. Remove rear ("B" End of Car) tie-down pin and raise rear end (bottom of cask). Remove impact limiter then move turning fixture into position and lower cask to engage turning trunnions in turning fixture bearing blocks by retracting the rear jacks.
9. Remove front ("A" End of car) tie-down pin and raise front end of cask. Remove front (top of cask) impact limiter.
10. Shutdown auxiliary cooling units No. 1 and No. 2. Remove inlet and outlet flexible pipes.
11. Attach lift yoke to the lifting trunnions and raise cask to vertical position. Lift cask from car and set down in designated work area. Remove lifting yoke.

### Operating Procedures

12. Wash down cask surfaces, as required, prior to entry into fuel pool.
13. Remove cover plate from cavity drain valve.
14. Connect pressure gauge and isolation valve assembly to closure head cavity drain valve. Observe and record pressure. Attach compressed air line to isolation valve. Pressurize closure head cavity to 10 psi above observed pressure. Hold pressure for 10 minutes and watch for pressure drop. Record observations.
15. Remove all outer closure head bolts.
16. Remove three (3) threaded inserts from top of outer closure head and replace with (3) eyebolts. Using slings and shackles, connect closure head eyebolts and cask lifting yoke. Remove outer closure head and set outer closure head on stand in Decontamination Area for radiological control and maintaining cleanliness of closure head. Carefully inspect gasket seal in underside of closure head. If gasket shows any damage, replace.
17. Connect cooldown inlet line (hot water supply line) to quick disconnect fitting on drain valve. Connect cooldown outlet line to fill valve. Open fill valve and vent cask thru cooldown system to plant off gas system. Equalize cask pressure to cooldown system feed pressure thru cask fill line.

### CAUTION

The hot gases exiting from the fill valve could be highly radioactive. The exhaust gases must therefore be contained and disposed of accordingly.

## Operating Procedures

Any system for cooling down the package shall be provided with a pressure relief device set so that the maximum pressure in the containment vessel does not exceed the maximum allowable operating pressure of the containment vessel.

18. Open suction drain valve and begin cooldown procedure.

### CAUTION

Coolant flow rates must be controlled to avoid thermal shock to the cask internals.

19. Continue cooldown procedure until cask cavity is completely filled with water.
20. Remove all but four closure head bolts, leaving cooldown system lines still connected and operating.
21. Using lifting yoke with slings attached, engage the cask lift trunnions and connect slings to lifting eyes on inner closure head.
22. Remove cooldown lines. Attach a hose to inner closure head fill valve with free end placed in spent fuel pool. Close inner closure head drain valve. (This approach is taken in the event of steam build-up in cavity prior to insertion in pool.)
23. Position cask over spent fuel storage pool and lower cask until top of inner closure head is about one foot under water. Remove remaining four (4) closure head bolts. Wet cask surfaces with demineralized water prior to placing cask in storage pool.

## Operating Procedures

Remove hose from fill valve. Open both cavity fill and drain valves.

Above operations are performed using long handled tools.

24. Slowly lower cask to rest on bottom of spent fuel storage pool. Disengage lifting yoke and slowly raise lifting yoke until inner closure head is raised clear of cask.
25. Set inner closure head on stand in Decontamination Area for radiological control and for maintaining cleanliness. Carefully inspect gasket on underside of closure head. If gasket shows any damage, replace it. Be certain that replacement gasket is properly installed and seated.
26. Remove fuel assembly spacer plug and set on supports suitable for radiological control.

### E. Unloading Fuel from Cask at Reprocessing Site

1. Read identification number on top surface of fuel assembly. Record identification number on receiving document.
2. Pick up fuel assembly using fuel grapple.
3. Set fuel assembly in pool storage rack. Release grapple from fuel assembly.
4. Repeat steps (1) through (3) above until all fuel has been removed from cask.

### F. Preparation for Returning Unloaded Cask to Reactor Site

1. Install fuel assembly spacer plug into cask.
2. Attach three-legged sling to cask lifting yoke. Position cask lifting yoke over cask inner closure head. Attach three-legged sling to lifting eyes on outer surface of inner closure head, using shackles.

## Operating Procedures

3. Position inner closure head over the cask and slowly lower onto cask flange. Guide pins of varying heights are located in cask flange to provide initial and final alignment. Visually confirm that closure head is seated.
4. Lower cask handling yoke to slacken the closure head cables which, in turn, locates yoke legs relative to cask trunnions. Engage cask trunnions and commence cask lift.
5. Raise cask until cavity drain valve is above water. Install at least four inner closure head bolts. After pool water has drained from the closure head cavity, close the cavity drain valve.
6. Commence hosing cask down with demineralized water. When all surfaces have been hosed, move cask to Decontamination Area and set down. Continue cask decontamination.
7. Connect hose from demineralized water supply to quick disconnect fitting on cavity fill valve. Connect a hose to cavity drain valve with free end of hose placed in contaminated drain. Open demineralized water supply valve. Open fill valve and drain valve and proceed to flush cavity for two (2) complete flushes. Close cavity fill valve and drain valve. Disconnect demineralized water supply line.
8. Install remaining inner closure bolts and torque to specified foot-pounds. Connect a hose to drain valve with free end of hose placed in contaminated drain. Connect T-fitting with pressure gage and isolation valve assembly to quick disconnect on cavity fill valve.

## Operating Procedures

9. Connect compressed air (regulated to 10 psig) to quick disconnect on isolation valve. Open drain valve and open compressed air supply and remove water from cavity. Remove hoses as well as pressure gage and isolation valve assembly. Install drain and fill line valve caps.
10. Attach three-legged lift sling to eye bolts on outer closure head. Lift outer closure head and position outer closure head on cask flange. Visually confirm that outer closure head is seated. Remove closure head lift cables.
11. Remove eye bolts from outer closure head and insert threaded metal plugs. Torque closure head bolts to specified foot-pounds.
12. Check concentration of anti-freeze in neutron water jacket. See instruction. A.23.
13. Health Physics survey entire cask for surface contamination. If values are higher than those specified in shipping document, continue decontamination. Record final values on shipping document.
14. Install valve cover on cavity drain valve cavity.
15. Attach the lifting yoke to cask. Move cask to railcar location and position cask over turning fixture bearing blocks.
16. Lower cask to railcar. Engage bearing blocks on turning fixture with trunnions on bottom end of cask. Lower cask to horizontal position, moving lifting yoke as required to keep crane cables vertical. Disengage cask lifting yoke from cask trunnions and set aside.
17. Elevate bottom end of cask using car mounted jacks. Disengage bearing blocks on turning fixture and move turning fixture to storage position.

## Operating Procedures

18. Install bottom impact structure. Lower cask using jacks until impact structure seats in saddles. Install hold down pin.
19. Install top impact structure. Lower cask using jack until impact structure seats in saddles. Install hold down pin.
20. Health Physics survey cask for surface contamination to assure compliance with DOT Regulations 173.393 (a). Record final values on shipping document.

NOTE "A"

When cask is shipped in an "Unloaded" condition, auxiliary cooling system does not operate nor is it connected to the cask. Therefore, no connections between cask and cooling system need be made at this time.


21. Connect water jacket and expansion tank, by connecting flexible metal hose from expansion tank to quick disconnect fitting on vent valve. Check expansion tank valves open. Be sure drain cock is closed.

NOTE "B"

The neutron shield tank need only be connected to the expansion tank when severe temperature changes are expected in transit.

22. Close personnel barrier.
23. Paste "EMPTY" shipping placards to outside of personnel barrier as required by 49 CFR 173.399.
24. Transportation supervisor review shipping document for completeness and accuracy. Sign off as ready for shipment.



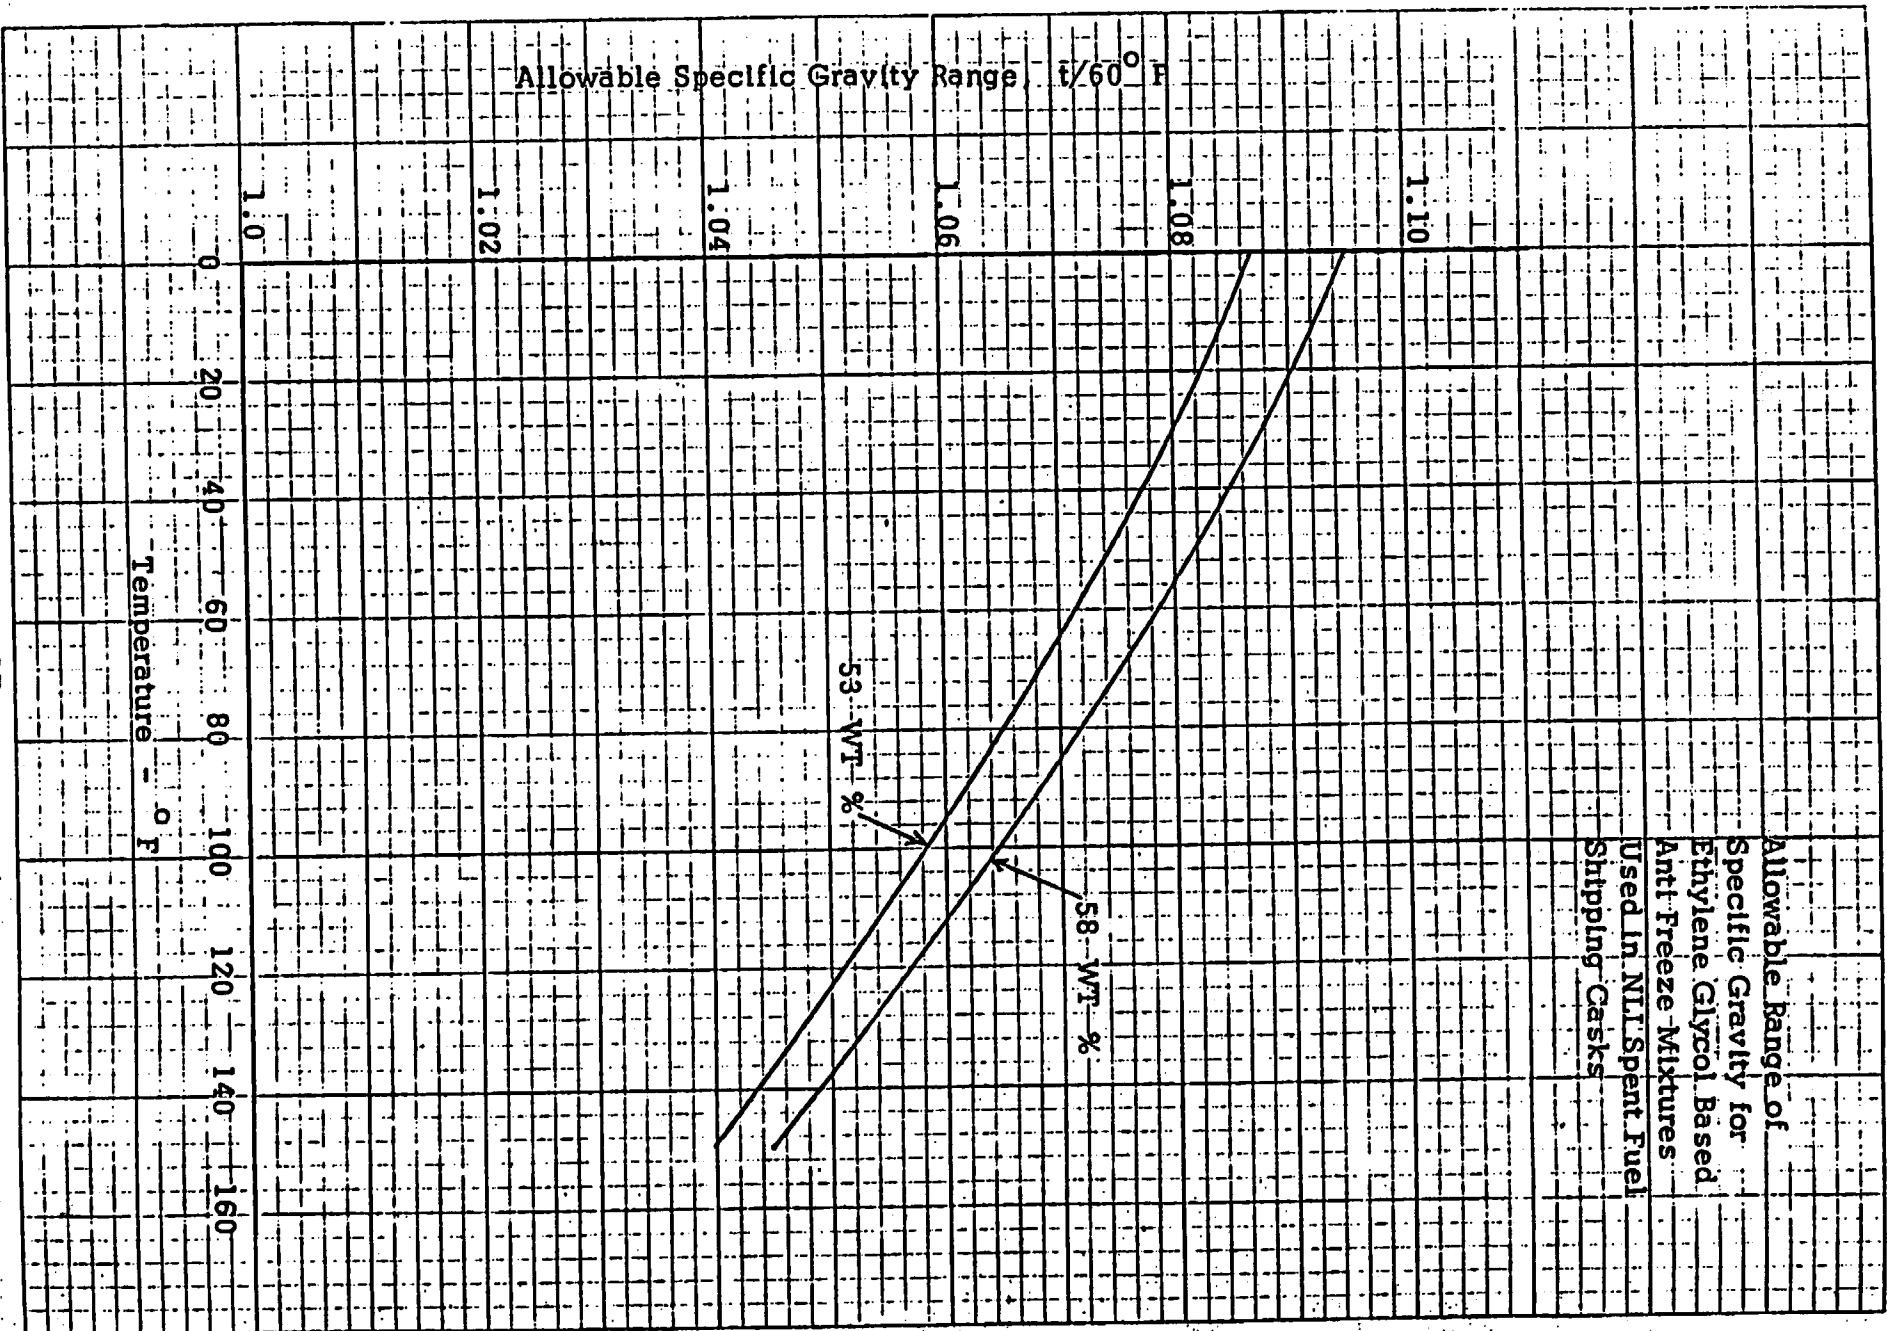

XVI-17

**THIS PAGE INTENTIONALLY LEFT BLANK**

*Section XVII*

---

**SECTION XVII**  
**MAINTENANCE PROGRAM**

**THIS PAGE INTENTIONALLY LEFT BLANK**

## SECTION XVII

### MAINTENANCE PROGRAM

Prior to the delivery of the shipping cask to the reactor site the cask will go through a set of preoperational checks to assure that all valves, instrumentation and seals are functioning properly and the required set of cask internals have been correctly installed. A checklist will be developed which will list each individual item to be checked and subassemblies or components of the item which require specific maintenance checks. The checklist will include the method of maintenance check to be used, hydrostatic test, air test, NDT, calibration or visual examination and the acceptance criteria for each. Space will be provided on the maintenance checklist form to enter the shipping cask identification number, supervisor's name, date and location. Each checkpoint will require sign-off by the individual making the check and date completed.

The maintenance checklist will also include auxiliary equipment such as the auxiliary cooling systems, lifting rig, personnel shield, expansion tank, and rail car. Maintenance of all running gear will be carried out in accordance with manufacturer's recommended procedures and schedules. Care and maintenance of the diesel generator set, fan and fan motor, pump and pump motor will follow the manufacturer's recommendation for this type of service.

Periodic maintenance and testing of seals, containment vessel valves, and relief valves on the package shall be as follows :

<u>Cask Component</u>	<u>Period</u>	<u>Test/Action</u>
Containment Vessel Valve Assembly		
Base Plate Seals	Each Shipment	*Gas pressure test to 5 psig
	Annually	**Helium Leak Check
Valve Cap Seals	Each Shipment	*Gas pressure test to 5 psig
	Annually	**Helium Leak Check
Inner Closure Head Seal	Each Shipment	Gas Bubble Test - 10 psig
	Annually	***Helium Leak Check
	Annually	Hydrostatic Test to 121 psig
Drain Line Gasket	Quarterly	Replacement
Outer Closure Head Seal	Each Shipment	Gas pressure test to 10 psig
	Annually	Helium Leak Check
Neutron Shield Jacket and Expansion Tank System	Annually	Hydrostatic Test to 300 psig
Neutron Shield Jacket Relief Valve	Annually	Verify cracking and reseating pressures. Allowable variation is + 5% of nominal cracking pressure
Expansion Tank Relief Valve	Annually	Verify cracking and reseating pressures. Allowable variation is + 5% of nominal cracking pressure.
Impact limiters	Annually	Gas Bubble Test - 10 psig

\*See Section XVI, Part C, Step 14 and 17

\*\*See Section XIV, 4.4

\*\*\*See Section XIV, 4.1.1

Rev. 1, 5/1/74

The replacement of valves, pressure gages, fittings, seals, and threaded fasteners is considered normal maintenance and would not require engineering approval. Engineering approval is required prior to making any repairs of damaged areas or areas that need refurbishing due to normal wear and tear. All such repairs will be fully documented.



THIS PAGE INTENTIONALLY LEFT BLANK

*Section XVIII*

---

**SECTION XVIII**  
**ENGINEERING DRAWINGS**

**THIS PAGE INTENTIONALLY LEFT BLANK**


**SECTION XVIII**  
**ENGINEERING DRAWINGS**

70650F	Sheet 1	Rev. 4	General Arrangement 10/24 Rail Cask
70651F	Sheet 1	Rev. 4	10/24 Rail Cask Details
	Sheet 2	Rev. 5	10/24 Rail Cask Details
	Sheet 3	Rev. 5	10/24 Rail Cask Details
	Sheet 4	Rev. 5	10/24 Rail Cask Details
	Sheet 5	Rev. 3	10/24 Rail Cask Details
	Sheet 6		DELETED
	Sheet 7	Rev. 2	10/24 Rail Cask Details
70652F	Sheet 1	Rev. 7	PWR Fuel Basket 10/24 Rail Cask
	Sheet 2	Rev. 5	PWR Fuel Basket 10/24 Rail Cask
70653F	Sheet 1	Rev. 7	BWR Fuel Basket 10/24 Rail Cask
	Sheet 2	Rev. 5	BWR Fuel Basket 10/24 Rail Cask
70654F	Sheet 1	Rev. 5	NLI 10/24 Cask & Rail Car General Arrangement
	Sheet 2	Rev. 2	Piping Plans & Details Rail- road Cask-Cooling System
	Sheet 3		DELETED
70655F	Sheet 1	Rev. 5	PWR Spacer Plug 10/24 Rail Cask
70656F	Sheet 1	Rev. 4	BWR Spacer Plug 10/24 Rail Cask

## Engineering Drawings

70640F	Sheet 1		DELETED
70665F	Sheet 1	Rev. 4	Neutron Shield Expansion Tanks 10/24 Rail Cask
70666F	Sheet 1	Rev. 5	10/24 Rail Cask Impact Structure Assembly & Details
	Sheet 2	Rev. 4	10/24 Rail Cask Front Impact Structure Ring Details
	Sheet 3	Rev. 3	10/24 Rail Cask Rear Impact Structure Ring Detail
	Sheet 4		DELETED
70667F	Sheet 1	Rev. 5	10/24 Rail Cask Support Structure Details
	Sheet 2	Rev. 5	10/24 Rail Cask Front Support and Tie Down Details
	Sheet 3	Rev. 5	10/24 Rail Cask Rear Support and Tie Down Details
	Sheet 4		DELETED
70708F	Sheet 1	Rev. 2	10/24 Rail Cask Alternate Construction
70899F	Sheet 1	Rev. 1	Cask, Car Tie-down Arrangement 10/24 Rail Cask
OC-459-1*		Rev. E	General Arrangement - 150 Ton Cask Transfer Car

\*Ortner Freight Car Drawing

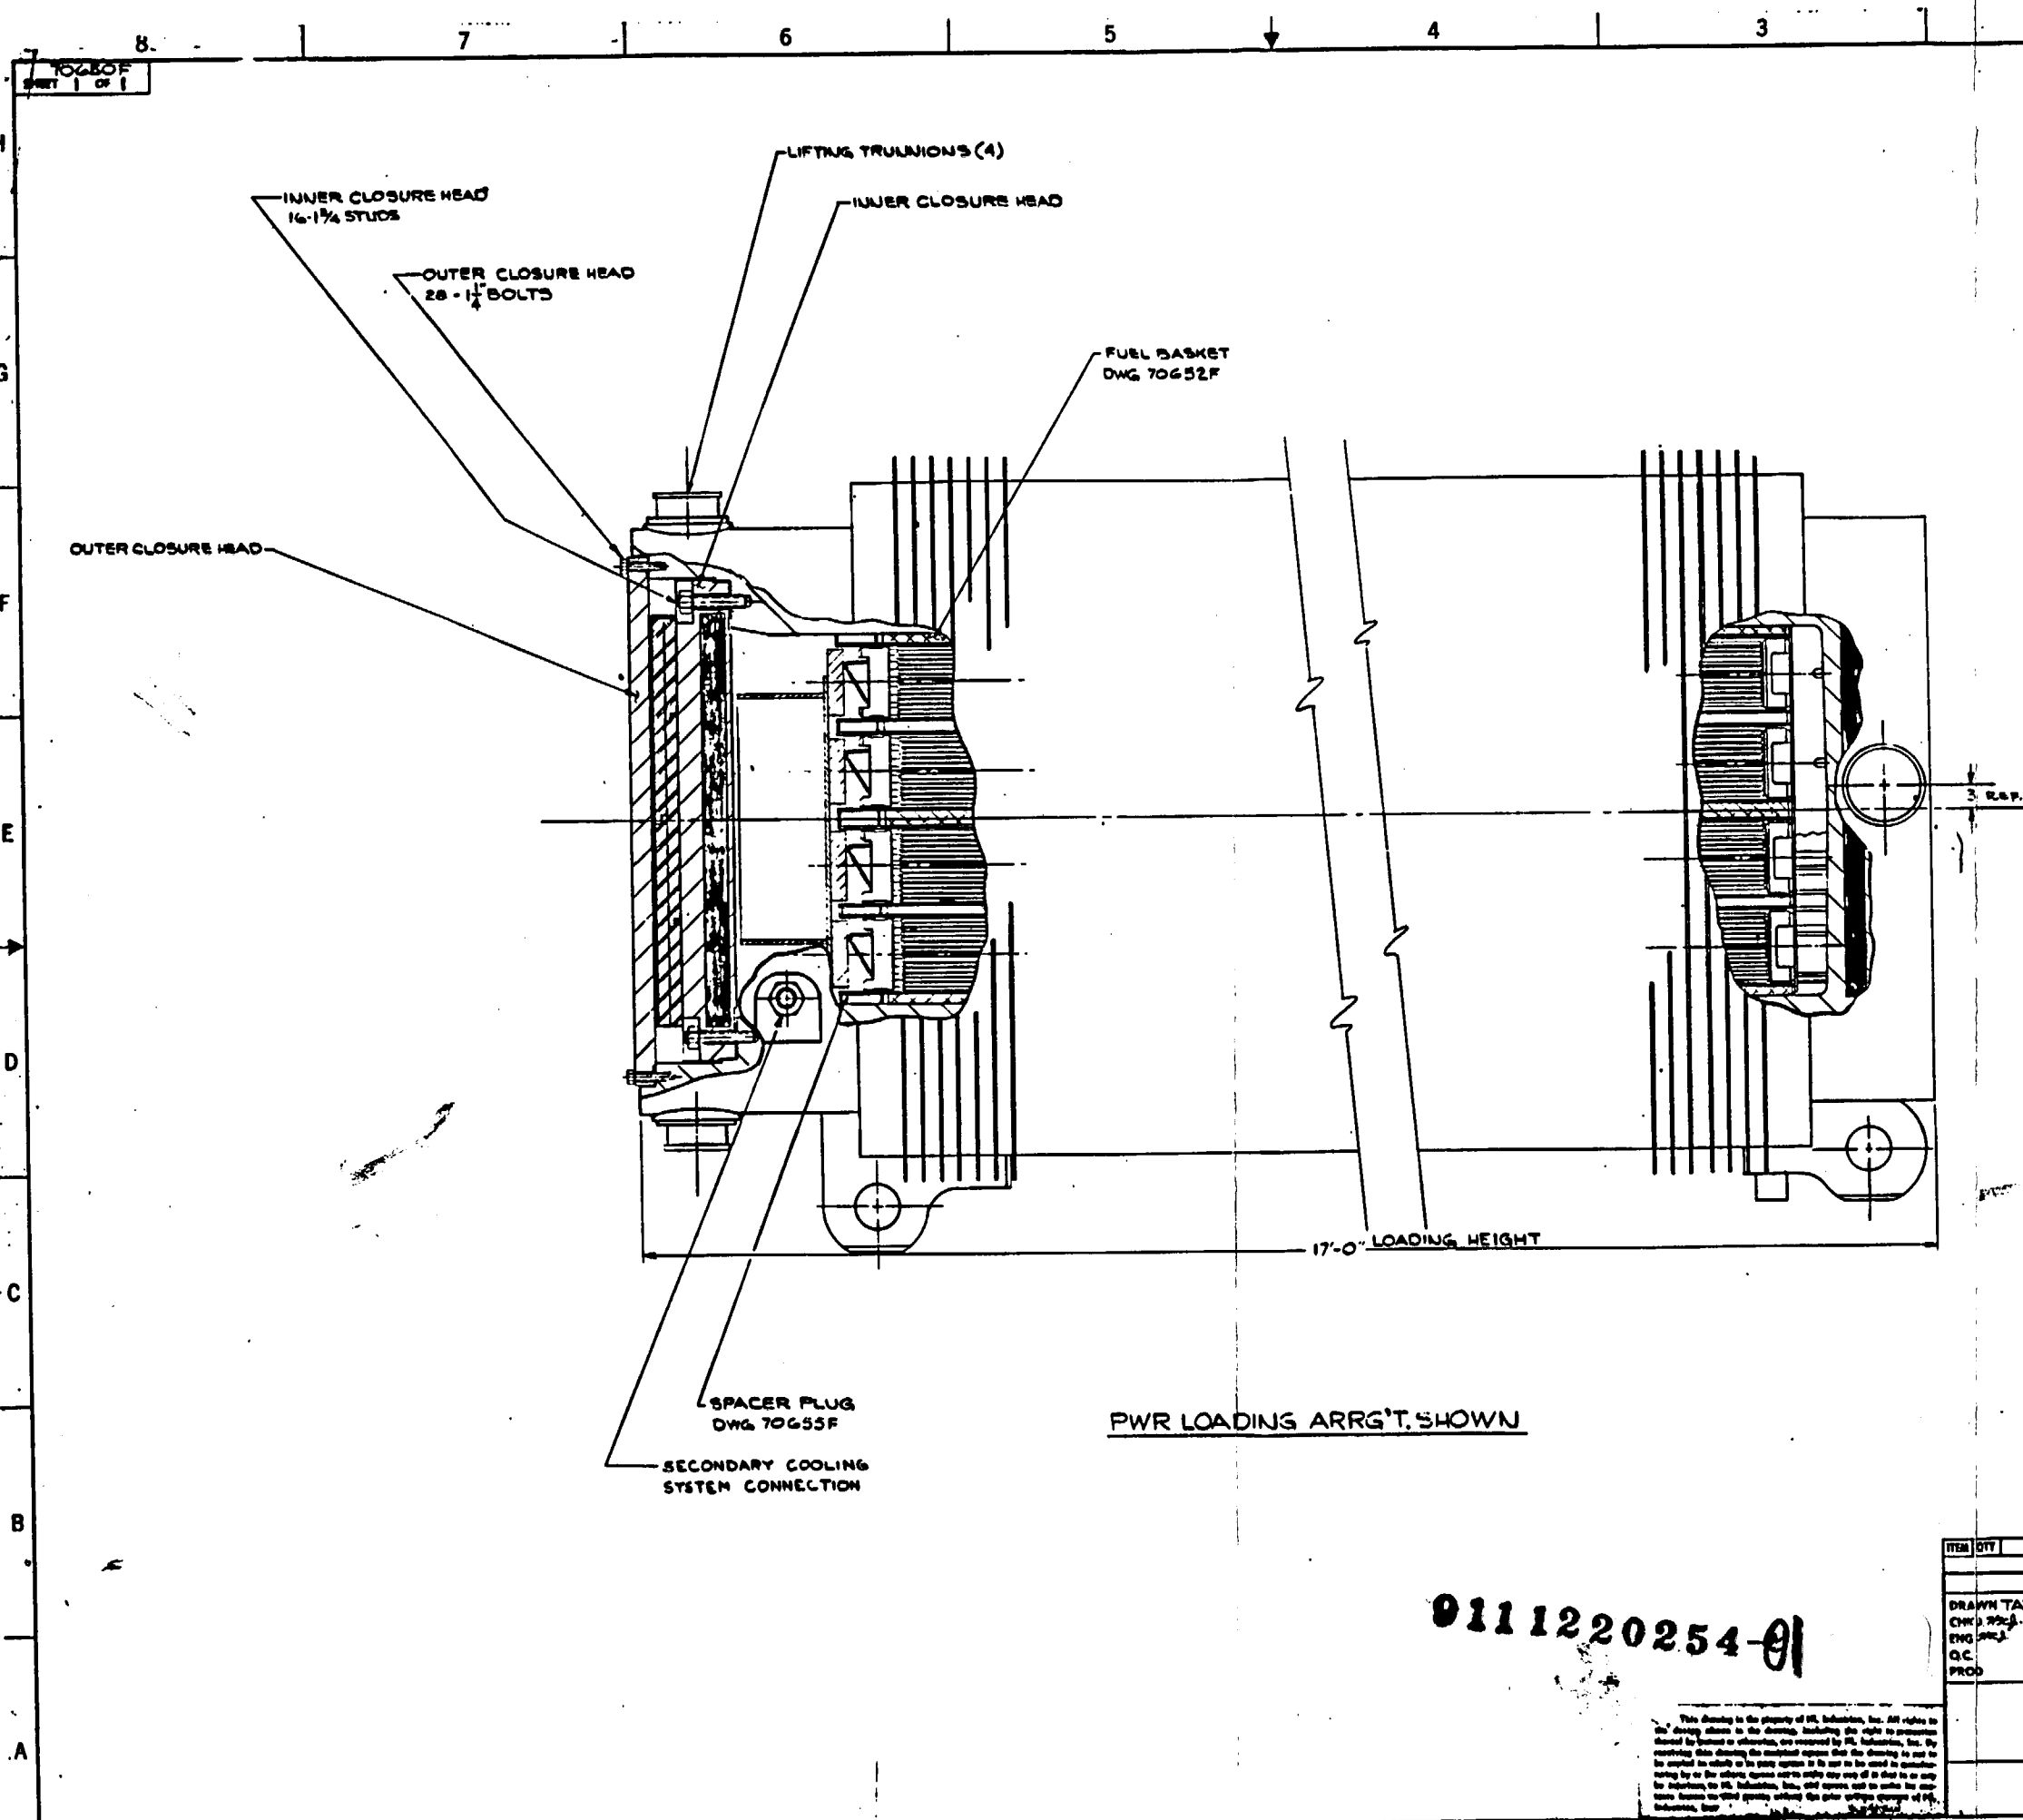



REVISIONS		
NO.	REV	DESCRIPTION
1		REV. SPACER PLUG, INNER & OUTER HEAD BOLTING. ADDED RING TO BOTTOM OF CASE
2		REVISED BOTTOM RING IN TONS P-3. REVISED OUTER CLOSURE HEAD BOLTS, REVISED FUEL BASKET SPACER PLUG. N.D. 1-11-76. INNER CLOSURE HEAD 16-1/4 STUDS WERE 20-1/4 BOLTS. 6-11-76
3		ADDED TIE DOWN LUGS & REBAR TIE DOWN. JIC 6-16-79. REVISED FUEL BASKET
4		REVISED ACT. OF CASE. SEAL & SPACE "P" DELETED. N.D. NEUTRON BOMBING. SEATED AT TOP & BOTTOM OF WATER JACKET.

ITEM	QTY	NAME	MATL	SPEC	DWG NO	DESCRIPTION
LIST OF MATERIAL						
<div> <div> DRAWN TAT CHKD PJC ENG PJC QC PROD </div> <div> DATE 5/1/75 5/7/75 5/7/75 </div> </div>						
<div> <div>  NATIONAL LEAD COMPANY NUCLEAR DIVISION WILMINGTON PLANT </div> <div> GENERAL ARRANGEMENT 10/24 RAILCASK </div> </div>						
CODE IDENT		MOB NO		SIZE	DRAWING NO	
29932		A-5325		F	70650F	
WT		SCALE		SHEET 1 OF 1		

9111220254-01

This drawing is the property of N.L. Industries, Inc. All rights in the design shown in the drawing, including the right to protection thereof by patent or otherwise, are reserved by N.L. Industries, Inc. By accepting this drawing the recipient agrees that the drawing is not to be copied in whole or in part, or in any manner, or to be used in manufacturing by or for others, except as may be required by N.L. Industries, Inc. and agrees to return the original drawing to N.L. Industries, Inc. upon completion of the work for which it was furnished.

REVISIONS				
ZONE	REV	DESCRIPTION		
1		REVISED SOLTING ARRANGEMENT & VALVES ADDED SOLTING ARRANGEMENT TO PLAN VIEW. RECORD & PLAN WAS APPROVED B.D. 6/24/78	6/24/78	
2		(PLAN VIEW) - REVEALED SOME JOINTS WERE REPAIRABLE LISTING & B-B MARK; (PLAN VIEW) CL. NEW MARK - REVEALED SOME JUNCTIONS WERE T. REPAIRABLE DRAINAGE WAS, RELOCATED LISTING EYES. - SEE	7-1-78	
3		SEC. B-B REPOSITIONED.	APR 9-8-78	APR 9-8-78 APR 9-16-78
4		REVISED PICTURE OF VALVES IN PLAN VIEW. REVISED DETAIL SHOWING WASER CLO. NO. LISTING EYE.	JUN 1-16-78	6/1-16/78

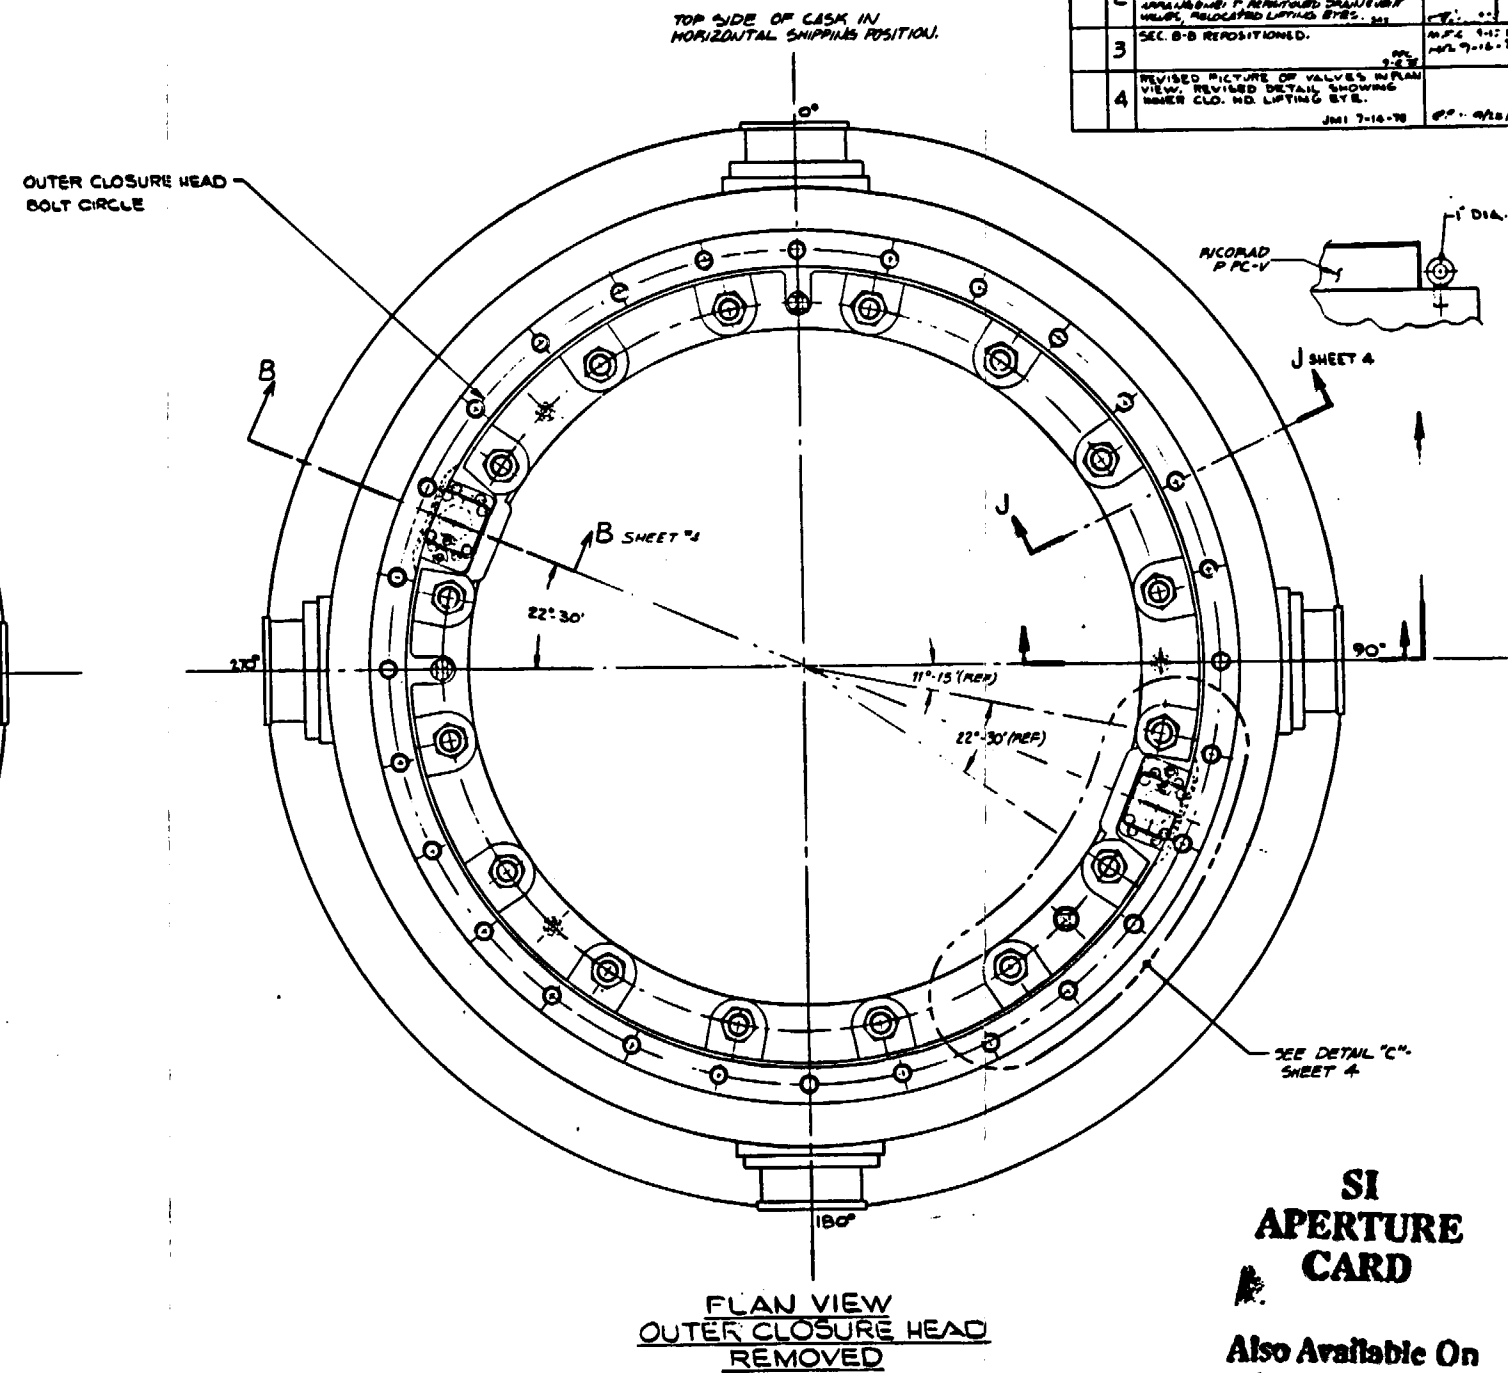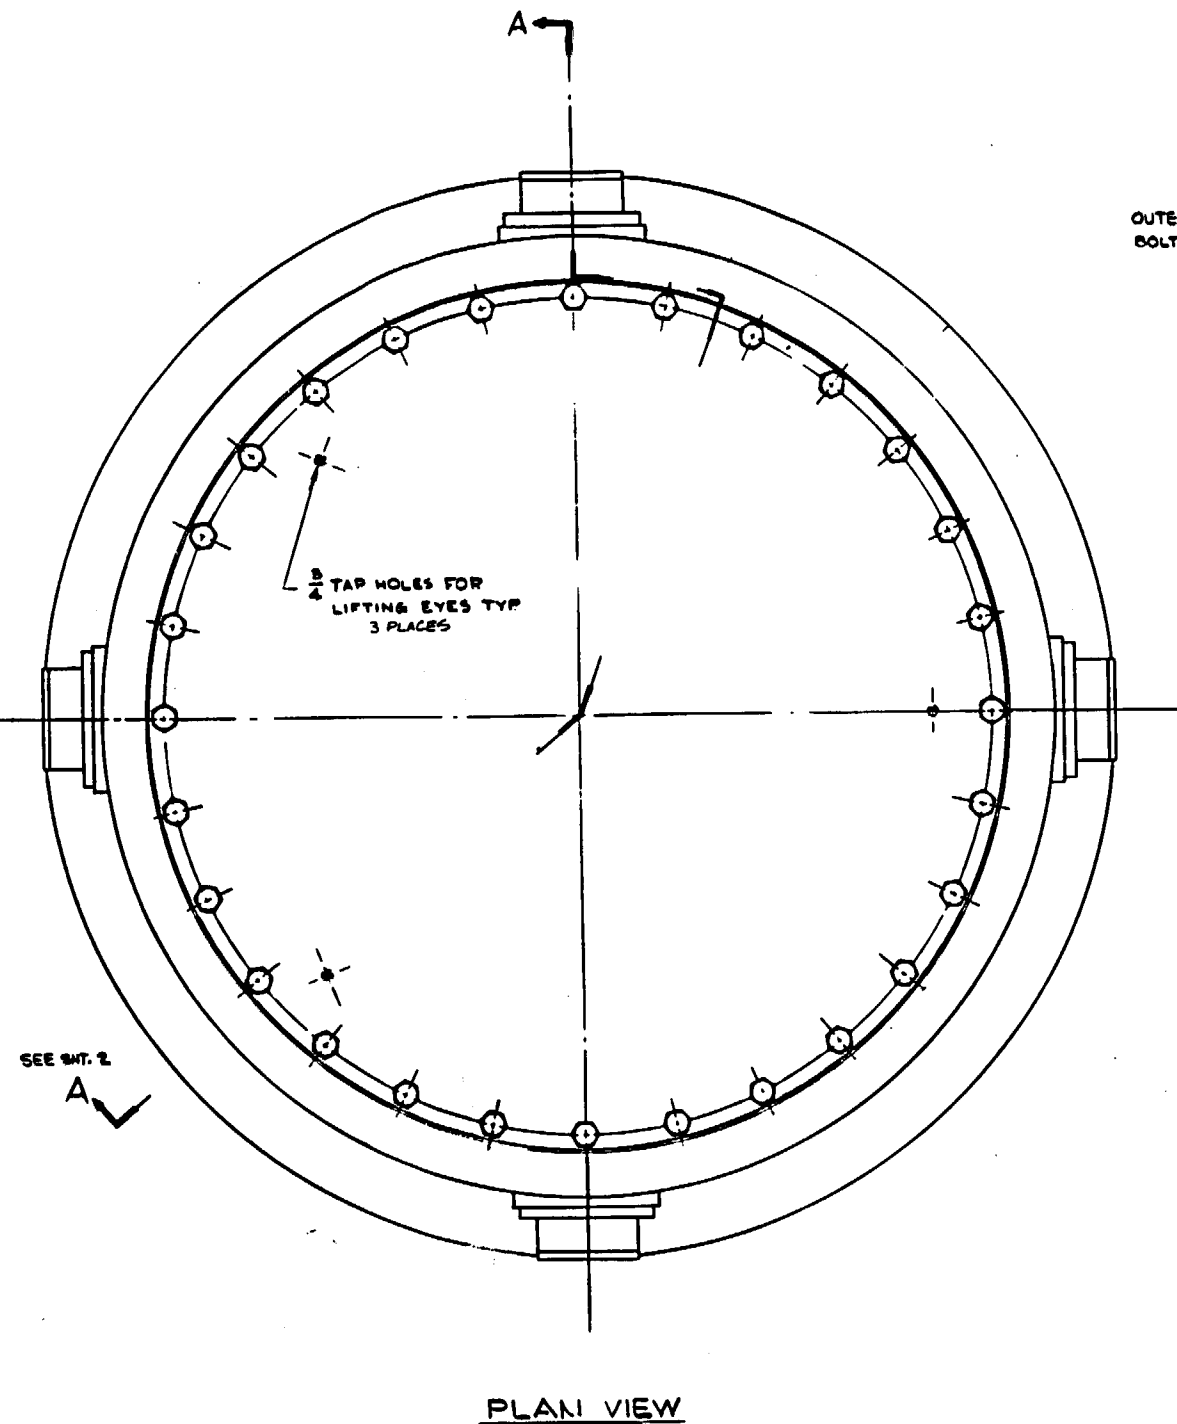

**SI  
APERTURE  
CARD**

**Also Available On  
Aperture Card**

911 1220254-02

This drawing is the property of M.L. Industries, Inc. All rights in the design shown in the drawing, including the right to promote, market or sell the design, or to license or otherwise use the design, shall be retained by M.L. Industries, Inc. In receiving this drawing the addressee agrees that the drawing is not to be copied in whole or in part, except as may be used in manufacturing by the addressee, agree not to make any use of it or its contents for the purpose of M.L. Industries, Inc., and agree not to make any disclosure to third parties without the prior written consent of M.L. Industries, Inc.


ITEM	QTY	NAME	MATL	SPEC	DWG NT	DESCRIPTION
LIST OF MATERIAL						
DRAWN C.W.B.		DATE	 <b>NATIONAL LEAD COMPANY</b> NUCLEAR DIVISION WILMINGTON PLANT			
CHKD. J.M.		11/17/77				
ENG. J.M.		11/17/77	10/24 RAIL CASK DETAILS			
QC		1/18/78				
PROD						
CODE IDENT			PROD NR	SIZ	DRAWING NR	REV
29932			A-5325	F	70651F	4
WT			SCALE 3/16		SHEET 1 OF 7	



FIGURE WITHHELD UNDER 10 CFR 2.390

ITEM	QTY	NAME	QTY	DATE	DESCRIPTION
LIST OF MATERIAL					
DRAWN BY CHAD D. MC RINO 3/16/85		DATE 3/16/85		NATIONAL LEAD COMPANY NUCLEAR DIVISION WASHINGTON PLANT	
10/24 RAIL CASK					
CONT. IDENT 29917		PROD. NO. A-5325		QTY 1	DRAWING NO. 70651E
SHEET 2 OF 7		5			



FIGURE WITHHELD UNDER 10 CFR 2.390

1.00

SECTION J-J  
SHOWN WITH CLOSURE  
HEADS REMOVED

-05

This drawing is the property of NLC Industries, Inc. All rights in the design shown in this drawing, including the right to reproduction, shall be vested in NLC Industries, Inc. By receiving this drawing the recipient agrees that the drawing is not to be copied or altered in any way, except as may be noted on modification drawings by the company, signed and sealed by the chief engineer for NLC Industries, Inc., and agrees that it shall not be used for any other purpose without the prior written consent of NLC Industries, Inc.

REV	DATE	NAME	DATE	SPHC	DWG NO	DESCRIPTION		
REV OF MATERIAL								
DRAWN TAT		DATE 4/17/02	<div><div>NLC</div><div>NATIONAL LEAD COMPANY NUCLEAR DIVISION WILMINGTON PLANT</div></div>					
CHG. JWS		DATE 5/1/02						
Q.C.			10/24 RAIL CASK DETAILS					
PROD								
			COOL BENT	PROD NO	DATE	DRAWING NO	REV	
			140312	A-55225	F	70651F	5	
			DRAWN BY 4.13.02TCD					SHEET 4 OF 7



9111220254-07

THE UNIVERSITY OF CHICAGO PRESS

ITEM QTY	NAME	UNIT	SPEC	DWG NO	DESCRIPTION
LIST OF MATERIAL					
DATE		N I INDUSTRIES NUCLEAR DIVISION WASHINGTON PLANT			
DRAWN H T W CHECKED JFC ENG. JMC QC PROD		10/24 RAIL CASK DETAILS			
29932		PROD NO		DRAWING NO	
A-5825		SIZE		70651F	
2		REV			

FIGURE WITHHELD UNDER 10 CFR 2.390

[illegible]

FIGURE WITHHELD UNDER 10 CFR 2.390

9111220254-09


PLANT	UNIT	DATE	TIME	CLASS	REVISION
UNIT OF MEASURE					
REMARKS	DATE	TIME	CLASS	REVISION	
REMARKS	DATE	TIME	CLASS	REVISION	
 <b>NIL INDUSTRIES</b> NUCLEAR DIVISION BIRMINGHAM, ALA.					
<p align="center"><b>PWR FUEL BASKET</b></p> <p align="center"><b>IQ24 RAIL CASK</b></p>					
COOL DOWN	REVISION	DATE	TIME	CLASS	REVISION
3-2-83	A-5.5.2.5	1/1	1	7034.3.2.5	1/1
<p align="center">Rev. 1</p>					

FIGURE WITHHELD UNDER 10 CFR 2.390

E BASKET WITH SUPPORTS (O.A.L.)

9111220254-10

[illegible]



FORM	QTY	NAME	MR	SPIC	DWG NO	DESCRIPTION
USE OF MATERIAL						
DRAWN T&T		 <b>NATIONAL LEAD COMPANY</b> NUCLEAR DIVISION WILMINGTON, DELAWARE				
ORDER FROM ENG. PROJ. G.E. PR000		DATE 10/24/77 10/24/77				
		BWR FUEL BASKET 10/24 RAILCASK				
		ISSUE NO 20432	REV IN A-5325	DR #	EXCHANGE IN 704534	REV 7
		BWR SCALE 3/4" = 1'-0" SHEET 1 OF 2				



FIGURE WITHHELD UNDER 10 CFR 2.390

9111220254-11

APPROVED BY

DATE		NAME		SPEC		QTY		DESCRIPTION	
LIST OF MATERIAL									
 NUCLEAR INDUSTRIES WASHINGTON, D.C.									
BWR FUEL BASKET									
10/24 RAIL CASK									
COPI RIGHT 28932									
A-5225									
F 70453 E									
S 111									
SCALE 1:1									
SHEET 1 OF 1									

)

THE JOURNAL OF THE AMERICAN MEDICAL ASSOCIATION  
PUBLISHED WEEKLY  
535 N. Dearborn Ave., Chicago 10, Ill.  
Subscription price, Five Dollars Per Annum in Advance  
Single Copies, Fifteen Cents  
Entered as Second-Class Matter, May 26, 1917  
Postpaid  
Acceptance for mailing at special rate of postage provided for in  
Act of October 3, 1917, authorized on July 16, 1918  
Postage paid at Chicago, Ill.  
Postmaster: Send address changes in this journal to THE JOURNAL OF THE AMERICAN MEDICAL ASSOCIATION, 535 N. Dearborn Ave., Chicago 10, Ill.

[illegible]

FIGURE WITHHELD UNDER 10 CFR 2.390

1  
2  
3

SECTION A-A

9111220254-13

REV	DATE	BY	CHKD	DATE	DESCRIPTION
LIST OF MATERIAL					
DRAWN JPL CHECKED RFP BY SC BY RD		<div><div><div>N</div><div>CO</div><div>LOG</div></div><div>N L INDUSTRIES NUCLEAR DIVISION WILMINGTON PLANT</div></div>			
PIPING PLANS & DETAILS RAILROAD CASK-COOLING SYSTEM					
EQUIPMENT 29992		REVISION A-5525	DATE 8	REVISION BY TODD F	REV 2
TWT		SCALE		SHEET 2 OF 2	



fI  
.1

v"

I

FIGURE WITHHELD UNDER 10 CFR 2.390

C

C

9111220254-15

FILE	QTY	NAME	REV	SPEC	QWTS	MT	DESCRIPTION
LIST OF MATERIAL							
DRAWN BY CHKD BY ISSUED BY DATE PROD		DATE TIME DOWN	<div><div>NL</div><div>N L INDUSTRIES NUCLEAR DIVISION WASHINGTON PLANT</div></div>				
			BWR SPACER PLUG				
			10/24 RAIL CASK				
2001 0101 29932		2001 0101 29932		2001 0101 29932		2001 0101 29932	
WT		SCALE		V/A		SHEET 1 OF 1	

FIGURE WITHHELD UNDER 10 CFR 2.390

5 SYSTEM PIPE

SECTION A-A

J.P.O.

ITEM QTY

PLANT

DATE

SPEC

DWG NO

DESCRIPTION

DRAWN E.W.B.

DATE

NEI INDUSTRIES

CHECK M.F.C.

DATE

NUCLEAR DIVISION

ENG H.C.C.

DATE

WILLIAMSON PLANT

QC

DATE

PROD

DATE

NEI

NEUTRON SHIELD

EXPANSION TANK

10/24 RAIL CAR

6004 TRMT

29932

4.5375

10/24

70606.5

4

WT

SCALE

—

SHEET

1

OF

1

FIGURE WITHHELD UNDER 10 CFR 2.390

FORM 301	NAME	UNIT	SPCS	DWG NO	REVISION
LIST OF MATERIAL					
DATE	REASON FOR CHANGE	BY	CHKD	APPROV	
<div style="display: flex; justify-content: space-between;"> <div> <p>10/24 RAIL CASK IMPACT STRUCTURE ASSEMBLY &amp; DETAILS</p> </div> <div> <p><b>NI</b> NUCLEAR INDUSTRIES NUCLEAR DIVISION TRANSMISSION PLANT</p> </div> </div>					
QUANTITY	DESCRIPTION	UNIT	REMARKS		
28992	E-5325	IF	70666F		
<div style="display: flex; justify-content: space-between;"> <div> <p>10/24 RAIL CASK IMPACT STRUCTURE ASSEMBLY &amp; DETAILS</p> </div> <div> <p><b>NI</b> NUCLEAR INDUSTRIES NUCLEAR DIVISION TRANSMISSION PLANT</p> </div> </div>					

FIGURE WITHHELD UNDER 10 CFR 2.390

[illegible]



FIGURE WITHHELD UNDER 10 CFR 2.390

ALL INFORMATION CONTAINED HEREIN IS UNCLASSIFIED  
DATE 07-11-2008 BY 60322 UCBAW/SJS

9111220854-19

NEW FROM REAR OF CASK

10/24 RAIL CASK  
REAR IMPACT STRUCTURE  
RING DETAILS

NI INDUSTRIES  
NUCLEAR DIVISION  
WASHINGTON, D.C.

DATE 10/24/84  
DRAWN BY S. S.  
CHECK BY P.T.C.  
DWG. NO. 10/24  
DTC  
REVISED

UNIT OF MATERIAL

REVISION

COPIES 2000  
20012

PROJ. NO. E-5525  
F 706444F  
J

SHEET 3 OF 3

FIGURE WITHHELD UNDER 10 CFR 2.390

TO FRONT BOLSTER		ITEM	QTY	NAME	UNIT	SPEC	DWG NO	DESCRIPTION
SIDE VIEW								
CASK IN TRANSPORT POSITION								
TO TOP OF RAIL								
DATE								
DRAWN BY: M.A.S.								
CHECKED BY: M.A.S.								
ENG. JAL								
Q.C.								
PROD.								
NL INDUSTRIES								
NUCLEAR DIVISION								
WELINGTON PLANT								
10/24 RAIL CASK								
SUPPORT STRUCTURE								
DETAIL								
COORD. ENT		PROD. RE		SILL		DRAWING NO		REV
20432		E-5325		F		70667E		5
WT		SCALE		SHEET		1 OF 3		

This drawing is the property of NL Industries, Inc. All rights in this drawing shall be retained by NL Industries, Inc. No reproduction or use of this drawing for any purpose other than that authorized by NL Industries, Inc. is permitted. The drawing is not to be used in any way without the written approval of NL Industries, Inc. The drawing is not to be used in any way without the written approval of NL Industries, Inc. The drawing is not to be used in any way without the written approval of NL Industries, Inc.



FIGURE WITHHELD UNDER 10 CFR 2.390

[illegible]

FIGURE WITHHELD UNDER 10 CFR 2.390


911 1220254-23

ITEM QTY	NAME	MATL	SPEC	QTYG	DISCRIPTION
CITY OF MATERIAL					
DATE	NL INDUSTRIES				
DRAWN	C.A.S.	DATE	NL INDUSTRIES		
CHKD	DATE	DATE	NUCLEAR DIVISION		
ENG.	DATE	DATE	WILMINGTON PLANT		
QC	DATE	DATE	10/24 RAIL CASK		
PROD	DATE	DATE	ALTERNATE CONSTRUCTION		
CROSS IDENT		INSTR IN	SITE	DRAWING IN	REV
30032		A-5325	1	70708 F	2
WPT		PCAL INCOME		SHEET 1 OF 1	

FIGURE WITHHELD UNDER 10 CFR 2.390

9111220254-24

This drawing is the property of NL Industries, Inc. All rights in the design shown on this drawing, including the right to protection thereof by patent or otherwise, are reserved by NL Industries, Inc. By receiving this drawing the recipient agrees that this drawing is not to be copied in whole or in part, copied or used in any way without the written consent of NL Industries, Inc., and agrees not to make the contents known to third parties without the prior written consent of NL Industries, Inc.

ITEM	QTY	NAME	MATL	SPEC	DWG. NO.	DESCRIPTION
LIST OF MATERIAL						
DRAWN <i>PC</i>		DATE <i>8-28-75</i>	 NATIONAL LEAD COMPANY NUCLEAR DIVISION WILMINGTON PLANT			
CHKD. <i>DL</i>		DATE <i>9-13-75</i>				
ENG. <i>PC</i>		DATE <i>3-4-76</i>				
QC						
PROD			CASK, CAR TIE DOWN ARRANGEMENT 10/24 RAILCASK			
			CODE IDENT 29932	PROD. NO. A 5325	SIZE F	DRAWING NO. 708295
			WT	SCALE	SHEET 1 OF 1	

SI  
APERTURE  
CARD

Also Available On  
Aperture Card

