


1-8

Figure 4-4. Indian Point-2: U-Bend POD vs. Burst Effective Crack Area


Crack Area = % average depth times length in inches

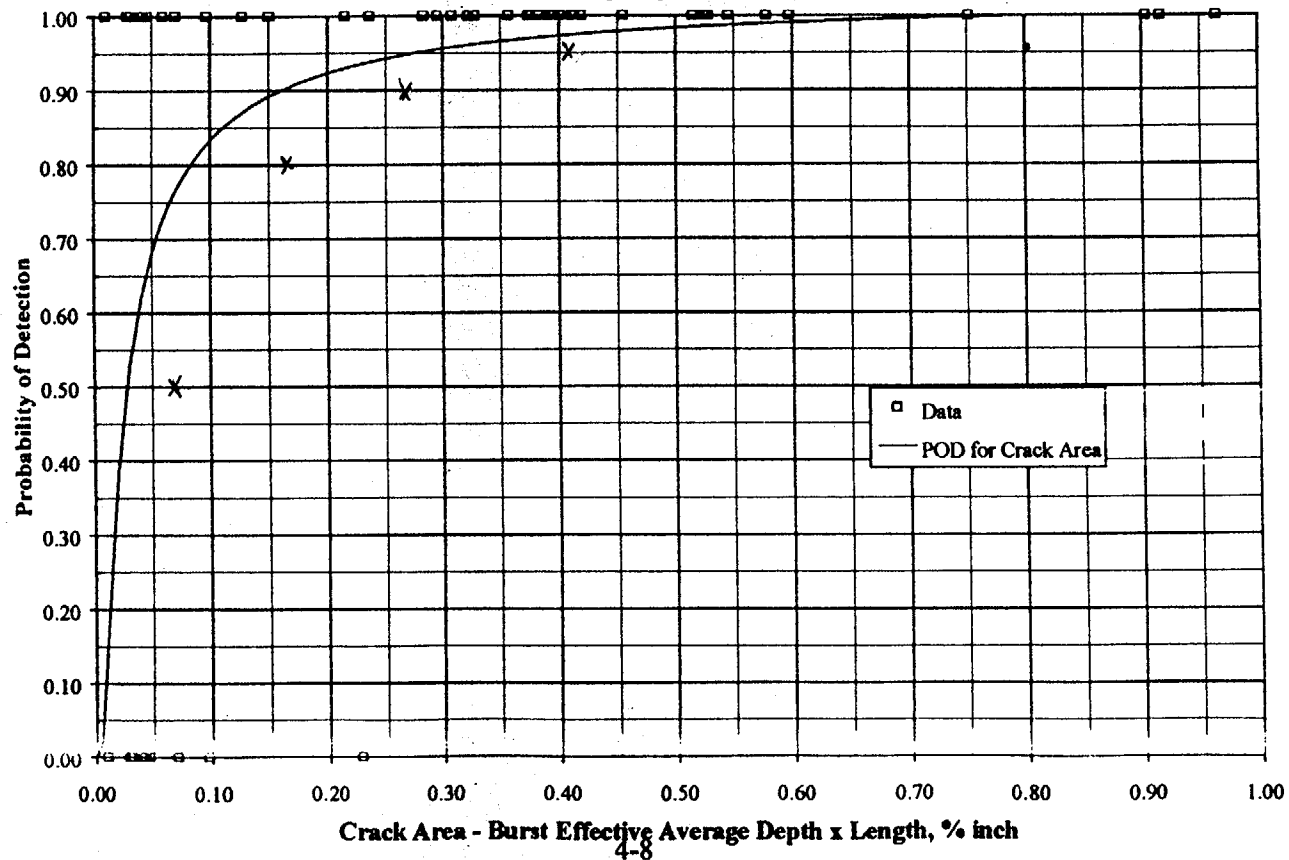


7/15/55


Figure 4-4. Indian Point-2: U-Bend POD vs. Burst Effective Crack Area


Crack Area = % average depth times length in inches

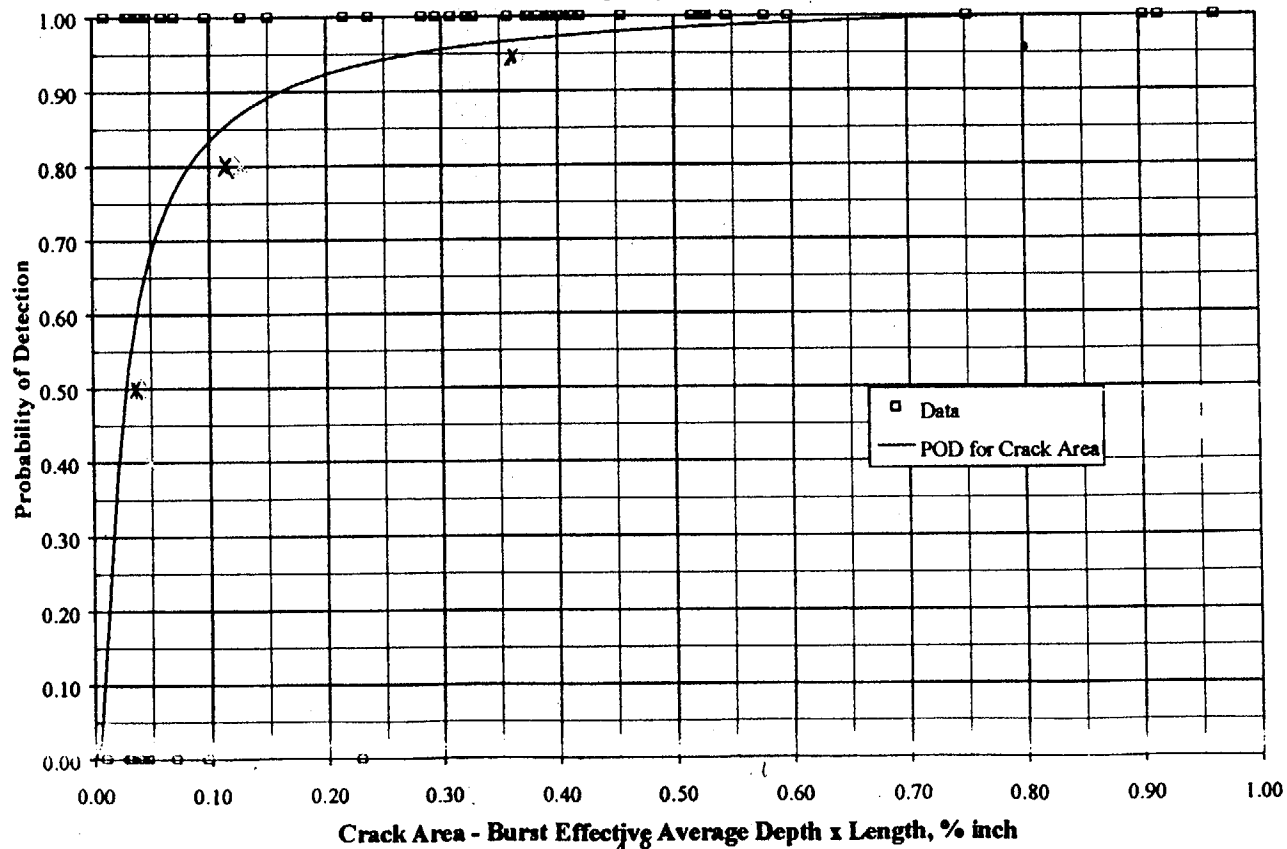


Flaw Area/400 KHz Voltage
Adjusted Crack Area for R2C74

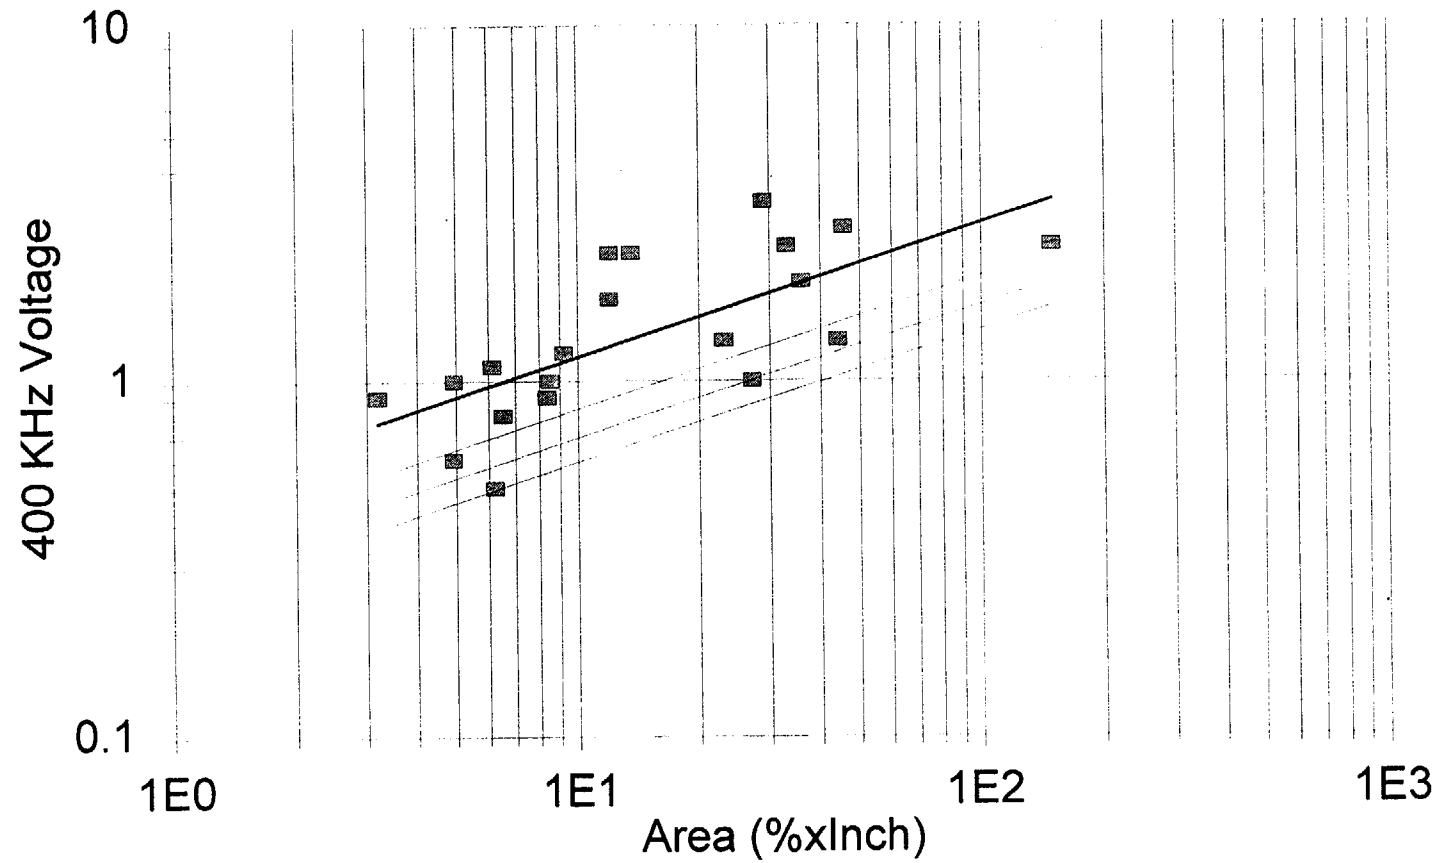


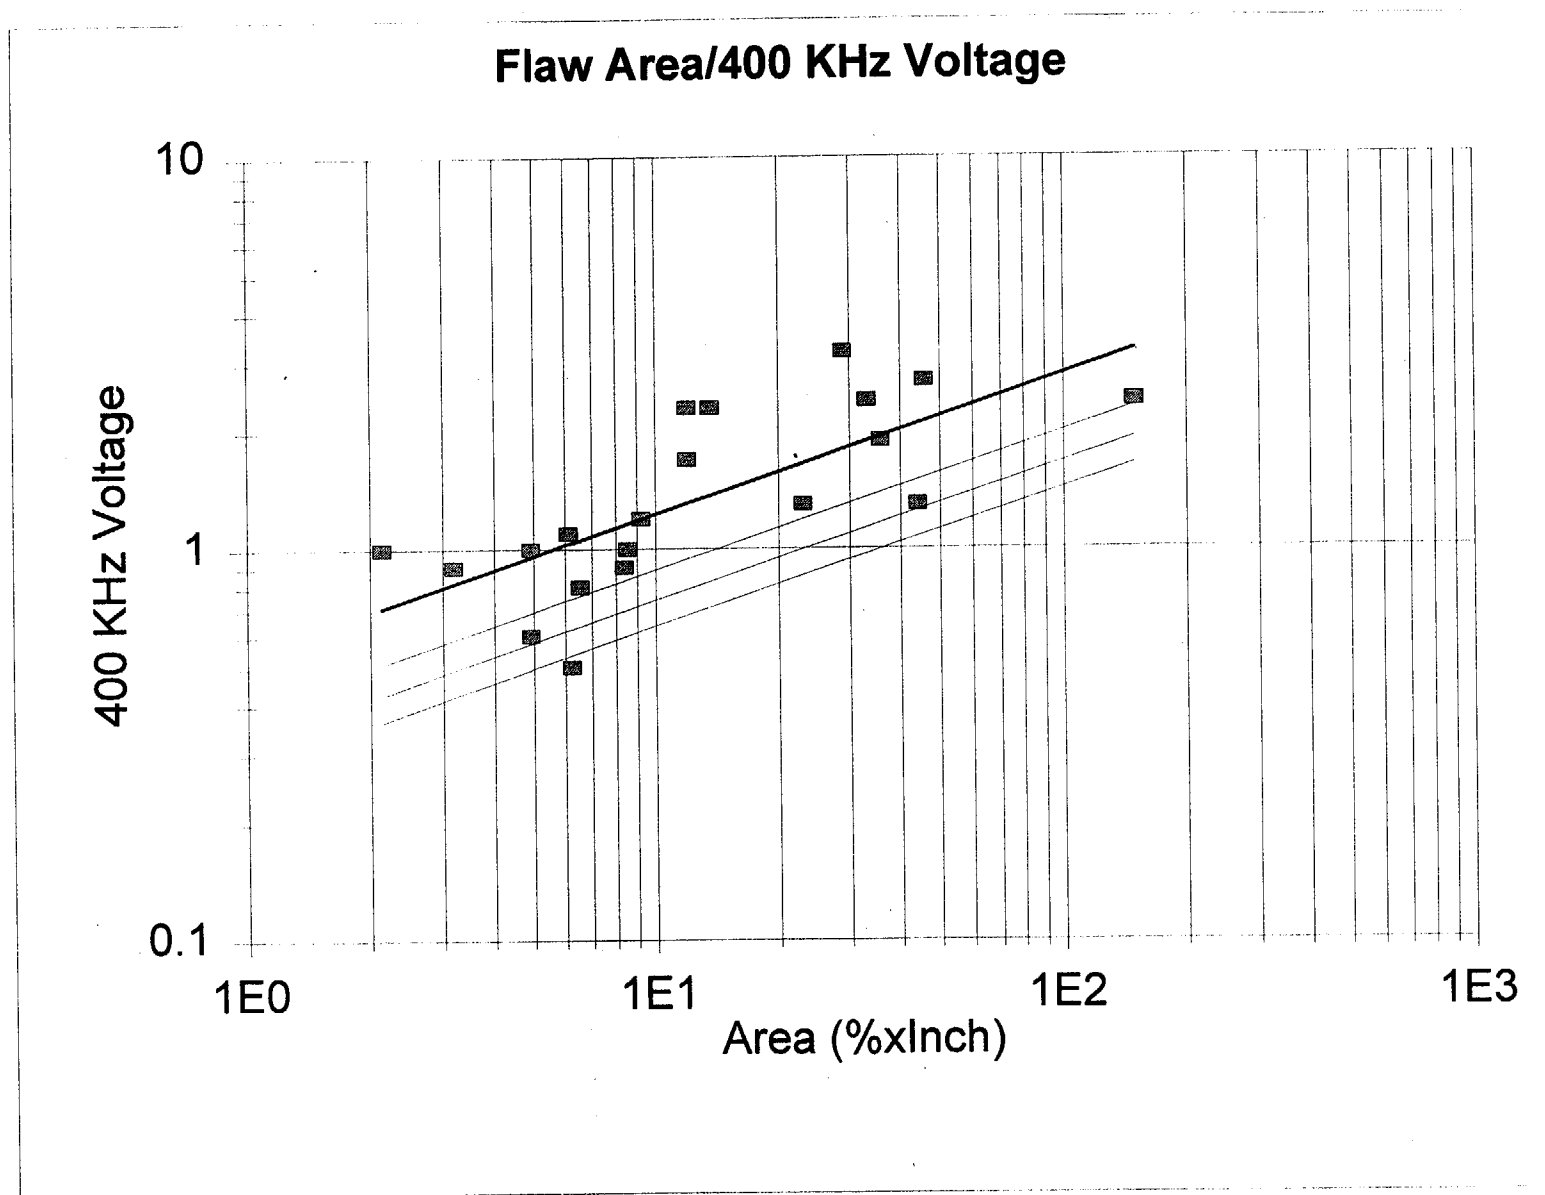


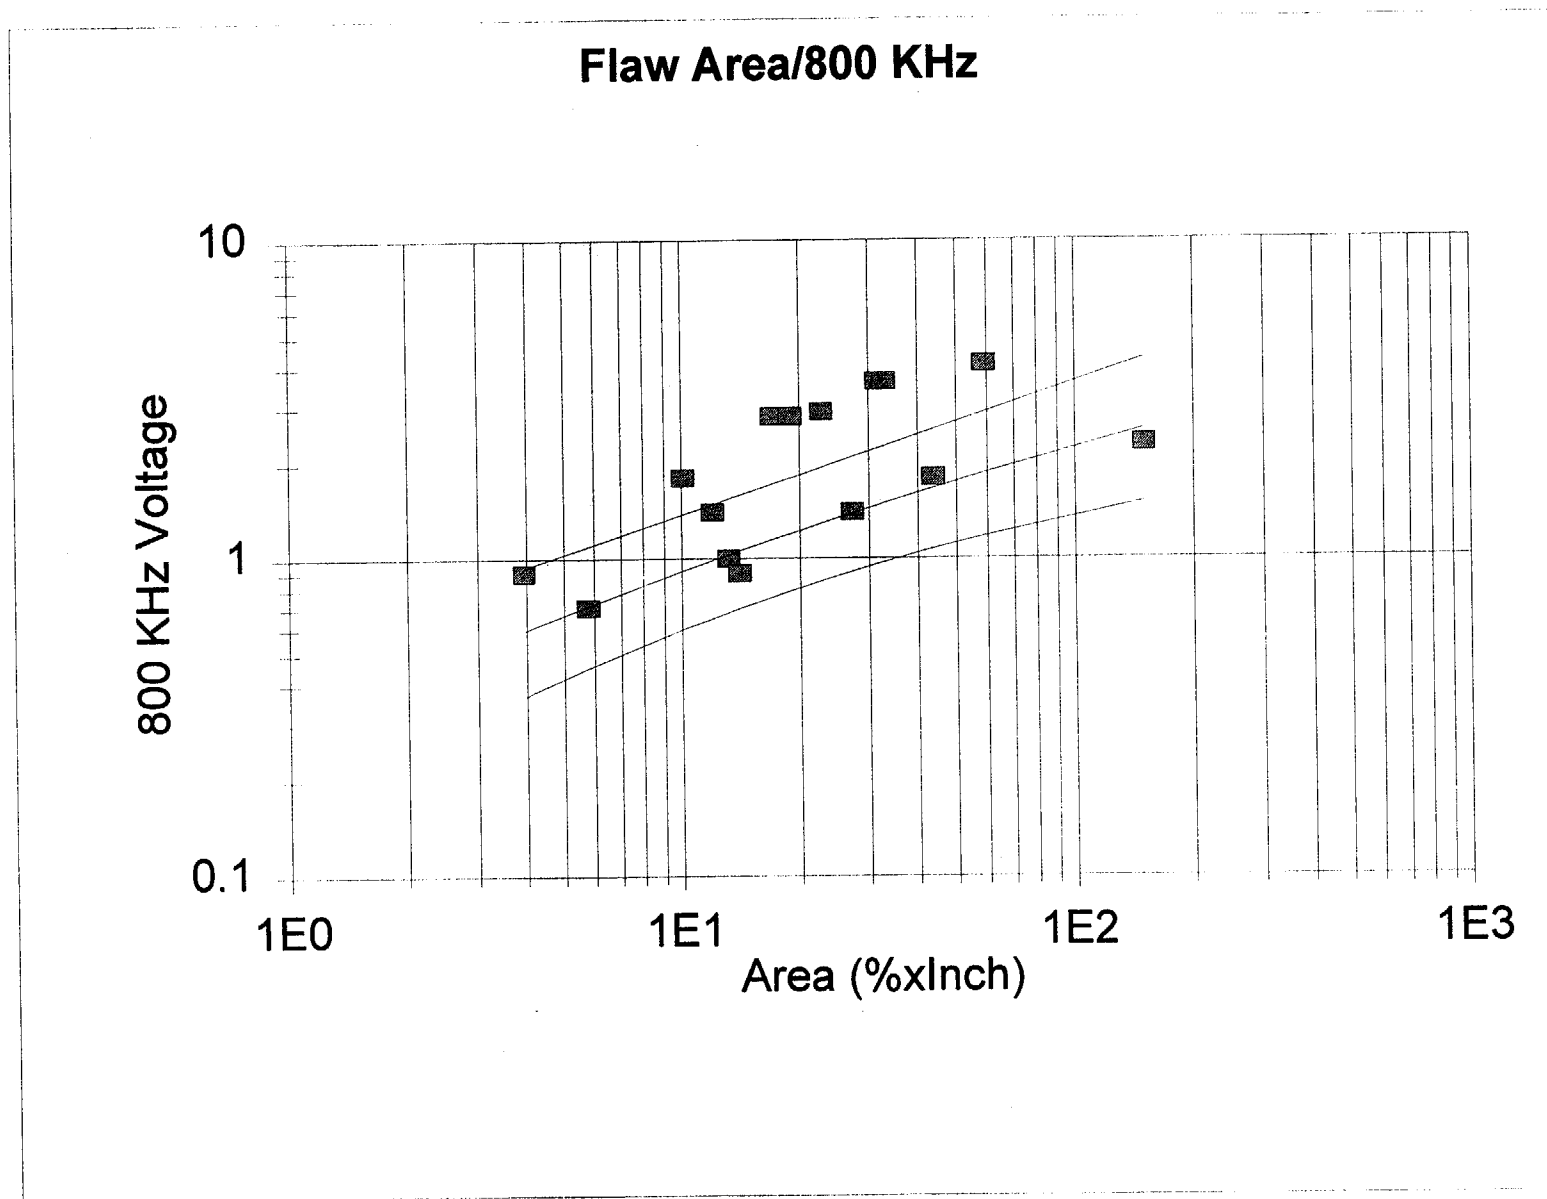


Flaw Area/800 KHz

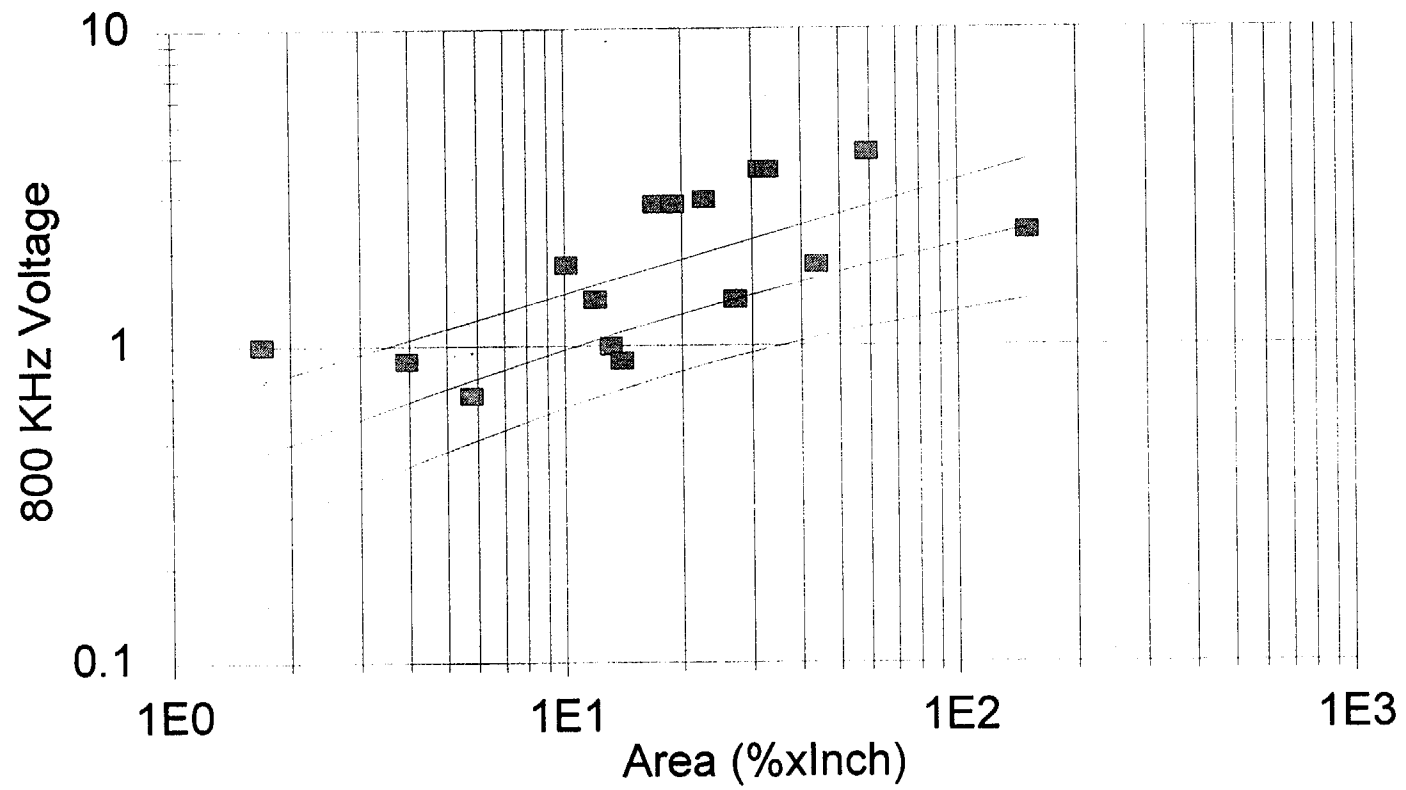

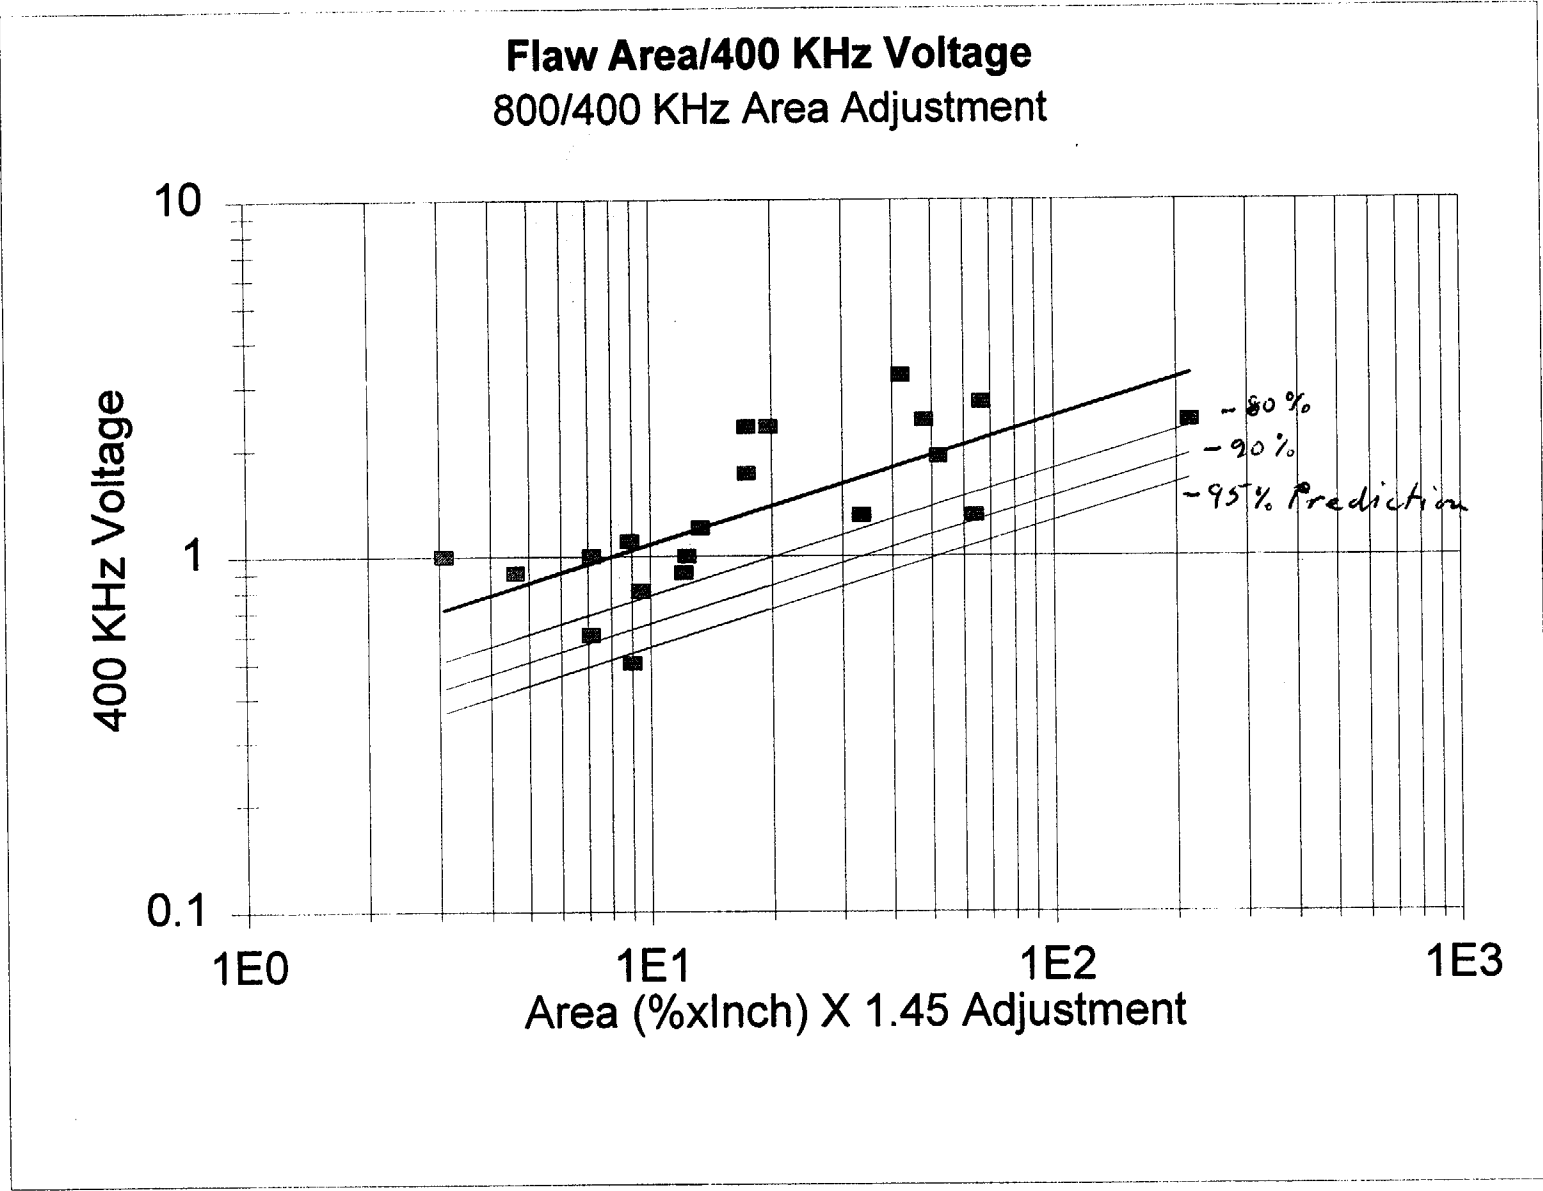

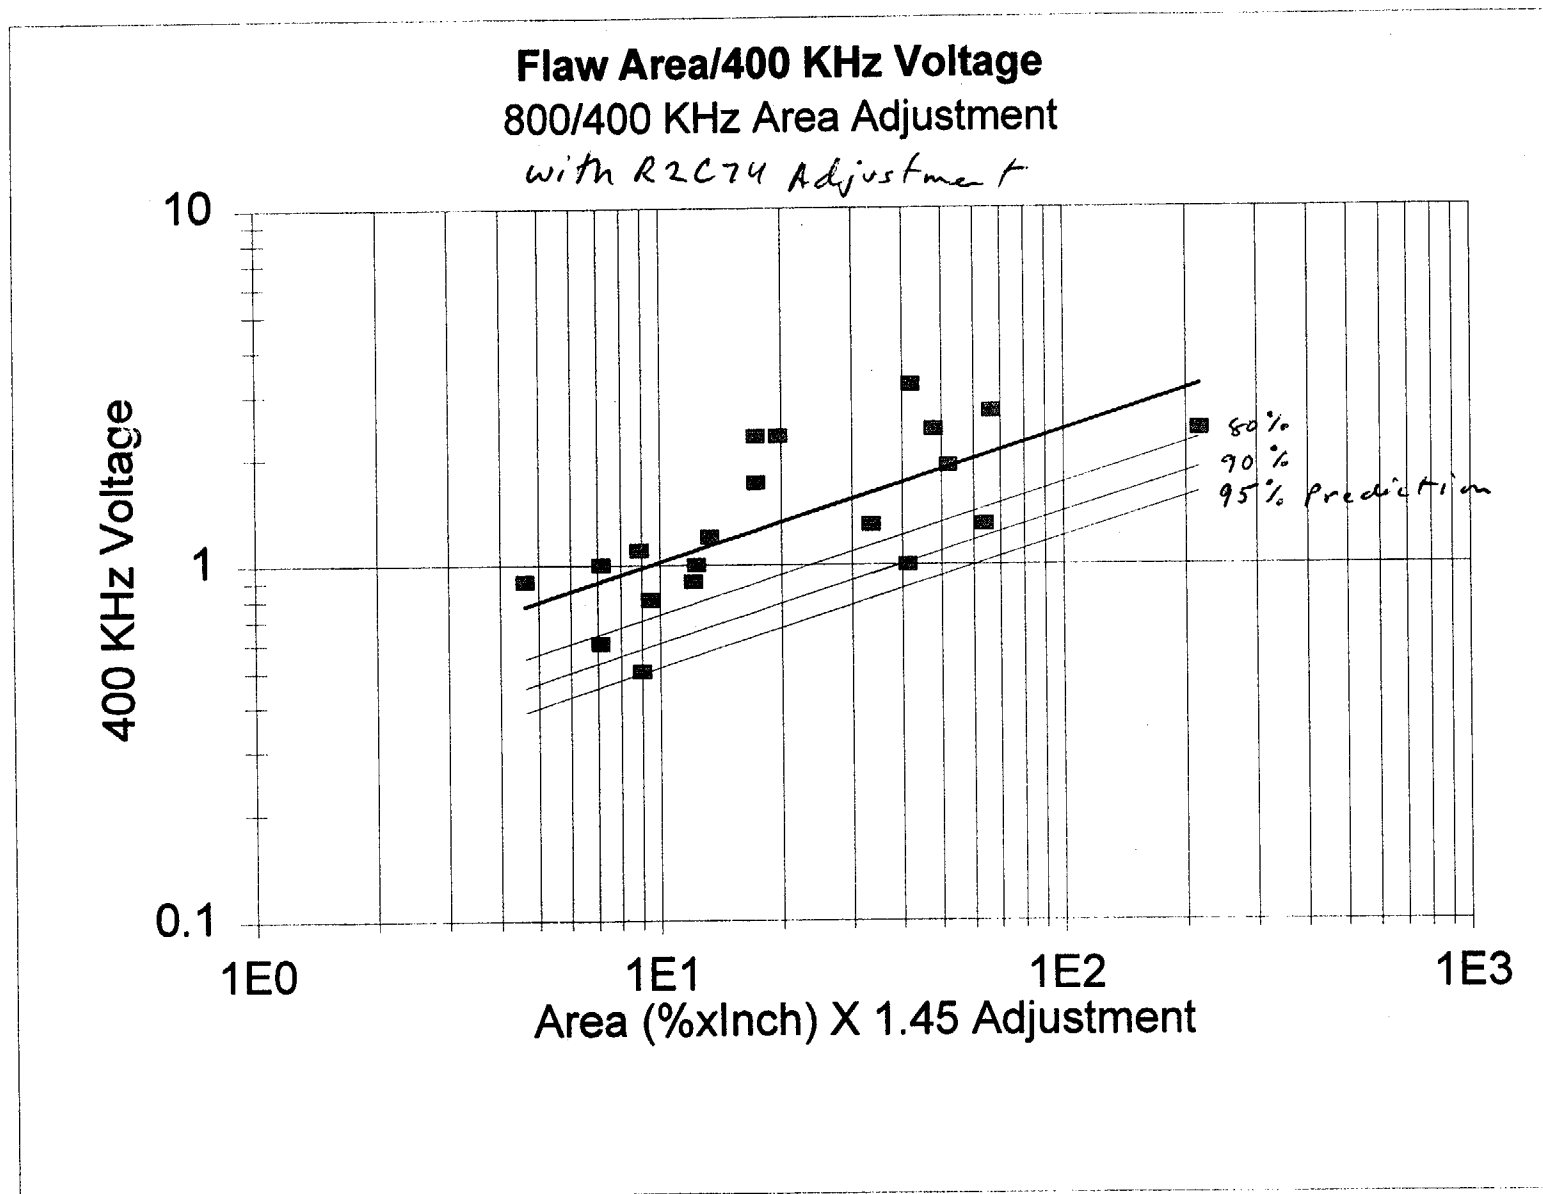

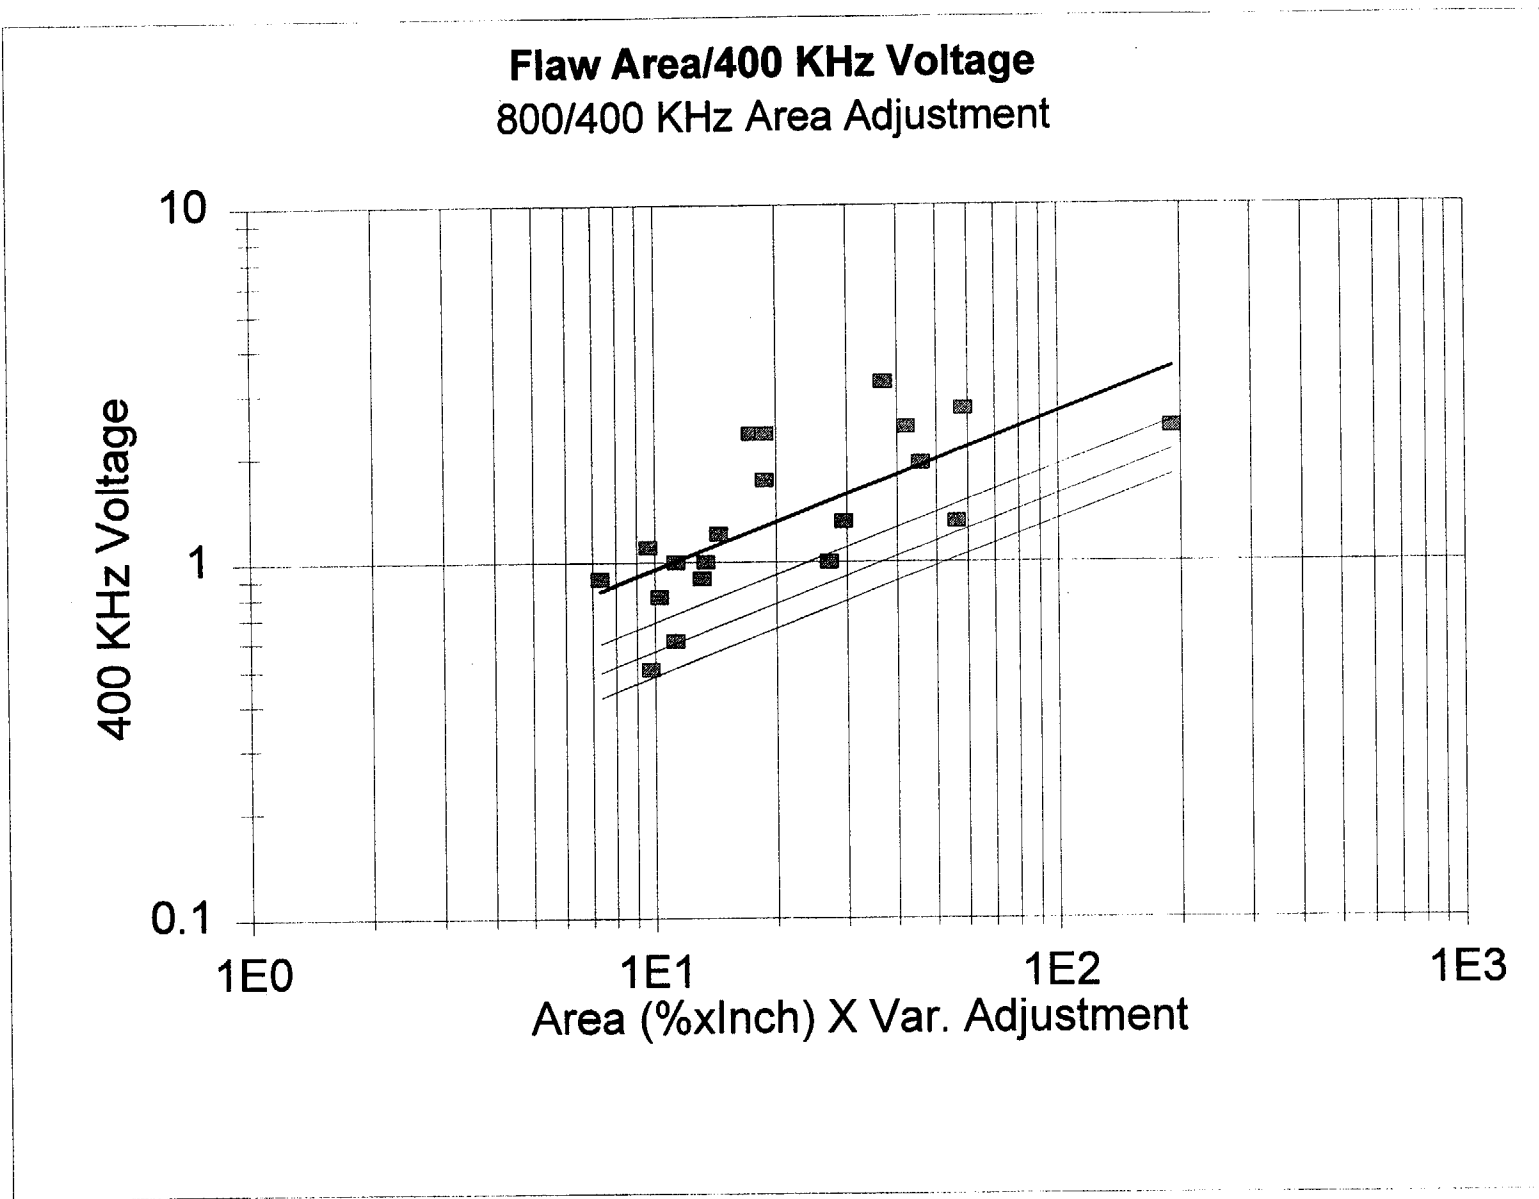

Flaw Area/400 KHz Voltage
800/400 KHz Area Adjustment

