

	PROJECT REPORT	PR No. DUK-001-PR-01
		Revision 0
		Page E1 of E160

Appendix E

Contents

HRQ-FWLA-001	E3
HRQ-FWLA-002	E114

Data Verification Summary

Data Verification Title: Cherokee Nuclear Station Final Foundation Field Maps and Index Map

ID Number: HRQ-FWLA-001

Date of Qualification Review Team Meeting: November 12, 2010

Quality Review Team:

Name	Sign (Initials)	Organization	Qualifications
Jim Cassidy	JRC 1 Dec 2010	Duke Energy	QA/QC Verification
John McConaghy	JMM 30 Nov 10	Duke Energy	Engineering
Juan Vizcaya	JV	Enercon Services Inc.	Engineering
Malcolm Schaeffer	MFS	HDR/DTA	Former Duke Power Project Geologist
Michael Gray	MGG	FWLA	Project Principal Geologist
Adam Wade	AW	FWLA	Project Geologist

Data / Evidence Considered During the Reviews:

The contents of the files outlined in attachment 2 were reviewed for applicability and completeness.

Critical Attributes Considered During the Reviews:

Files comprise the hand drawn field maps, including index map, documenting observed foundation level mapping conducted at former Cherokee Nuclear Station (CNS) Unit 1 and portions of CNS Unit 2.

Basis for Qualification / Non-Qualification:

The data is qualified to use in WLS evaluations to document final foundation geology beneath former CNS units 1 and 2. The information documented in these files was acquired, prepared, and verified using the applicable specifications and Duke QA procedures governing at the time of gathering and preparation. The CNS final foundation field geologic maps, including index map, may be used in corroboration of information. These field maps will be used as inputs to develop a final foundation map record to support geologic evaluations as part of WLS COLA.

Is the data considered Nuclear Safety Related QA Qualified? Yes (Yes / No)

Recommendations for Additional Qualification Activities:

None

Dissenting conclusions or comments: If the team reaches consensus, enter "None" here. Otherwise, document the dissenting view as follows:

Reviewer Name and Organization: _____

Dissenting Statement: _____ None _____

Signature and Date: _____

I hereby certify this Data Verification Package is complete:

Quality Review Team Lead: *Michael G. Guy* **(Sign)** **Date:** 12/02/2010

I approve this Data Verification Package for the usage identified above:

Approved By: *R.L. Morgan, Jr* **(Sign)** **Date:** 12/02/2010
(Duke Project Manager or designee)

Data Verification Planning Form

Data Verification Title: Cherokee Nuclear Station **ID Number:** HRQ-FWLA-001
Final Foundation Maps and Index Map

Scope of Historical Data Requiring Review:

Sixty (60) hand drawn field geologic maps at 1"=10' scale of final excavated surface of the Cherokee Nuclear Station (CNS), and one (1) hand drawn index map. Mapping performed during CNS construction from 1977 to 1982. Attachment 1 summarizes the individual field maps to be qualified. Attachment 2 contains .pdf copies of hand drawn map panels and index map. Attachment 3 contains a copy of the records transmittal. Attachment 4 contains a copy of the written mapping procedures and addendum for the final excavation mapping program.

Purpose / Applicability of

Data:

These field maps will be used as inputs to develop a final foundation map record to support geologic evaluations as part of WLS COLA.

Methods of Verification (X):

Peer Review _____ Data Corroboration X Confirmatory Testing _____

Rationale:

The field maps generated for this project were produced using approved standards and procedures by Duke Power Company, now Duke-Energy. They represent an in-process product with status as of the time work on the Cherokee project was stopped. A copy of the Duke Power mapping procedure and addendum is provided in Attachment 4. Current-era work will compile information from these field maps to support licensing and construction of Lee Nuclear Station

Need for Data Qualification

Affirmed By:

Michael Gray **Date:** 5/19/2010
FWLA Project Manager (or designee)

Required Organizations for

Verification:

FWLA with support from Duke-Energy and Enercon.

Duke Approval of Scope and Methods

Used:

RL Morgan, Jr **Date:** 12/02/2010
Duke Project Manager (or designee)

Attachments:

- Attachment 1 Listing of Field Maps to be Qualified
- Attachment 2 CNS Final Foundation Field Maps and Index Map
- Attachment 3 Record Transmittals
- Attachment 4 Duke Power Company Mapping Procedures and Addendum

Attachment 1

Listing of Field Maps to be Qualified


Attachment 1 - Listing of Field Maps to be Qualified

Duke Energy Records Designation					CNS Records Designation	CNS Map Phase	
Folder Name	File Name/ Map Panel #	Date of Transmittal	Rescanned Map Panel File Name	Date of Transmittal	Map Panel Designation	Phase II map 1"=10'	Inset map 1"=10'
CK10-01	20.TIFF	March 23 2007			CK10-01A	X	
	21.TIFF	March 23 2007			CK10-01A		X
CK10-02	22.TIFF	March 23 2007			CK10-02B	X	
	23.TIFF	March 23 2007			CK10-01B	X	
	24.TIFF	March 23 2007			CK10-02D	X	
	25.TIFF	March 23 2007			CK10-02A	X	
	26.TIFF	March 23 2007			CK10-02F	X	
	27.TIFF	March 23 2007			CK10-02E	X	
CK10-03	28.TIFF	March 23 2007			CK10-020	X	
	29.TIFF	March 23 2007			CK10-03A	X	
	30.TIFF	March 23 2007			CK10-03B	X	
	31.TIFF	March 23 2007			CK10-03C	X	
	32.TIFF	March 23 2007			CK10-03D	X	
	33.TIFF	March 23 2007			CK10-03E	X	
CK10-04	34.TIFF	March 23 2007			CK10-03F	X	
	35.TIFF	March 23 2007			CK10-04A	X	
	36.TIFF	March 23 2007			CK10-04B	X	
	37.TIFF	March 23 2007			CK10-04C	X	
CK10-05	38.TIFF	March 23 2007			CK10-04D	X	
	39.TIFF	March 23 2007			CK10-05A	X	
	40.TIFF	March 23 2007			CK10-05B	X	
CK10-06	41.TIFF	March 23 2007			CK10-05C	X	
	42.TIFF	March 23 2007			CK10-06A	X	
	43.TIFF	March 23 2007			CK10-06B	X	
	44.TIFF	March 23 2007			CK10-06C	X	
	45.TIFF	March 23 2007			CK10-06D	X	
	46.TIFF	March 23 2007			CK10-06E	X	
CK10-07	47.TIFF	March 23 2007			CK10-06F	X	
	48.TIFF	March 23 2007			CK10-07F		X
	49.TIFF	March 23 2007	49 CK10-07A.JPEG	June 4 2010	CK10-07A	X	
	50.TIFF	March 23 2007			CK10-07B	X	
	51.TIFF	March 23 2007			CK10-07C	X	
	52.TIFF	March 23 2007	52 CK10-07D.JPEG	June 4 2010	CK10-07D	X	
CK10-08	53.TIFF	March 23 2007			CK10-07E	X	
	54.TIFF	March 23 2007			CK10-07F	X	
	55.TIFF	March 23 2007			CK10-08C	X	
	56.TIFF	March 23 2007			CK10-08A	X	
CK10-09	57.TIFF	March 23 2007			CK10-08B	X	
	58.TIFF	March 23 2007			CK10-08D	X	
	59.TIFF	March 23 2007			CK10-09C	X	
	60.TIFF	March 23 2007			CK10-09A	X	
CK10-10	61.TIFF	March 23 2007			CK10-09B	X	
	62.TIFF	March 23 2007	62 CK10-10B.JPEG	June 4 2010	CK10-10B	X	
	63.TIFF	March 23 2007			CK10-10A	X	
	64.TIFF	March 23 2007			CK10-10D	X	
	65.TIFF	March 23 2007			CK10-10C	X	
	66.TIFF	March 23 2007			CK10-10F	X	
CK10-11	67.TIFF	March 23 2007			CK10-10E	X	
	68.TIFF	March 23 2007			CK10-11E	X	
	69.TIFF	March 23 2007	69 CK10-11F.JPEG	June 4 2010	CK10-11F	X	
	70.TIFF	March 23 2007			CK10-11B	X	
	71.TIFF	March 23 2007			CK10-11C	X	
CK10-12	72.TIFF	March 23 2007			CK10-11A	X	
	73.TIFF	March 23 2007	73 CK10-11D.JPEG	June 4 2010	CK10-11D	X	
	74.TIFF	March 23 2007			CK10-12B	X	
CK10-13	75.TIFF	March 23 2007			CK10-12C	X	
	76.TIFF	March 23 2007			CK10-12A	X	
CK10-14	77.TIFF	March 23 2007			CK10-13A	X	
CK10-14	78.TIFF	March 23 2007			CK10-14B	X	
	79.TIFF	March 23 2007			CK10-14A	X	
	Final Foundation Index Map (AKA Binder2 2).PDF	November 23 2006			CK-0021-05A Rev.2	NA	NA


ATTACHMENT 2


CNS Final Foundation Field Maps and Index Map


[illegible]

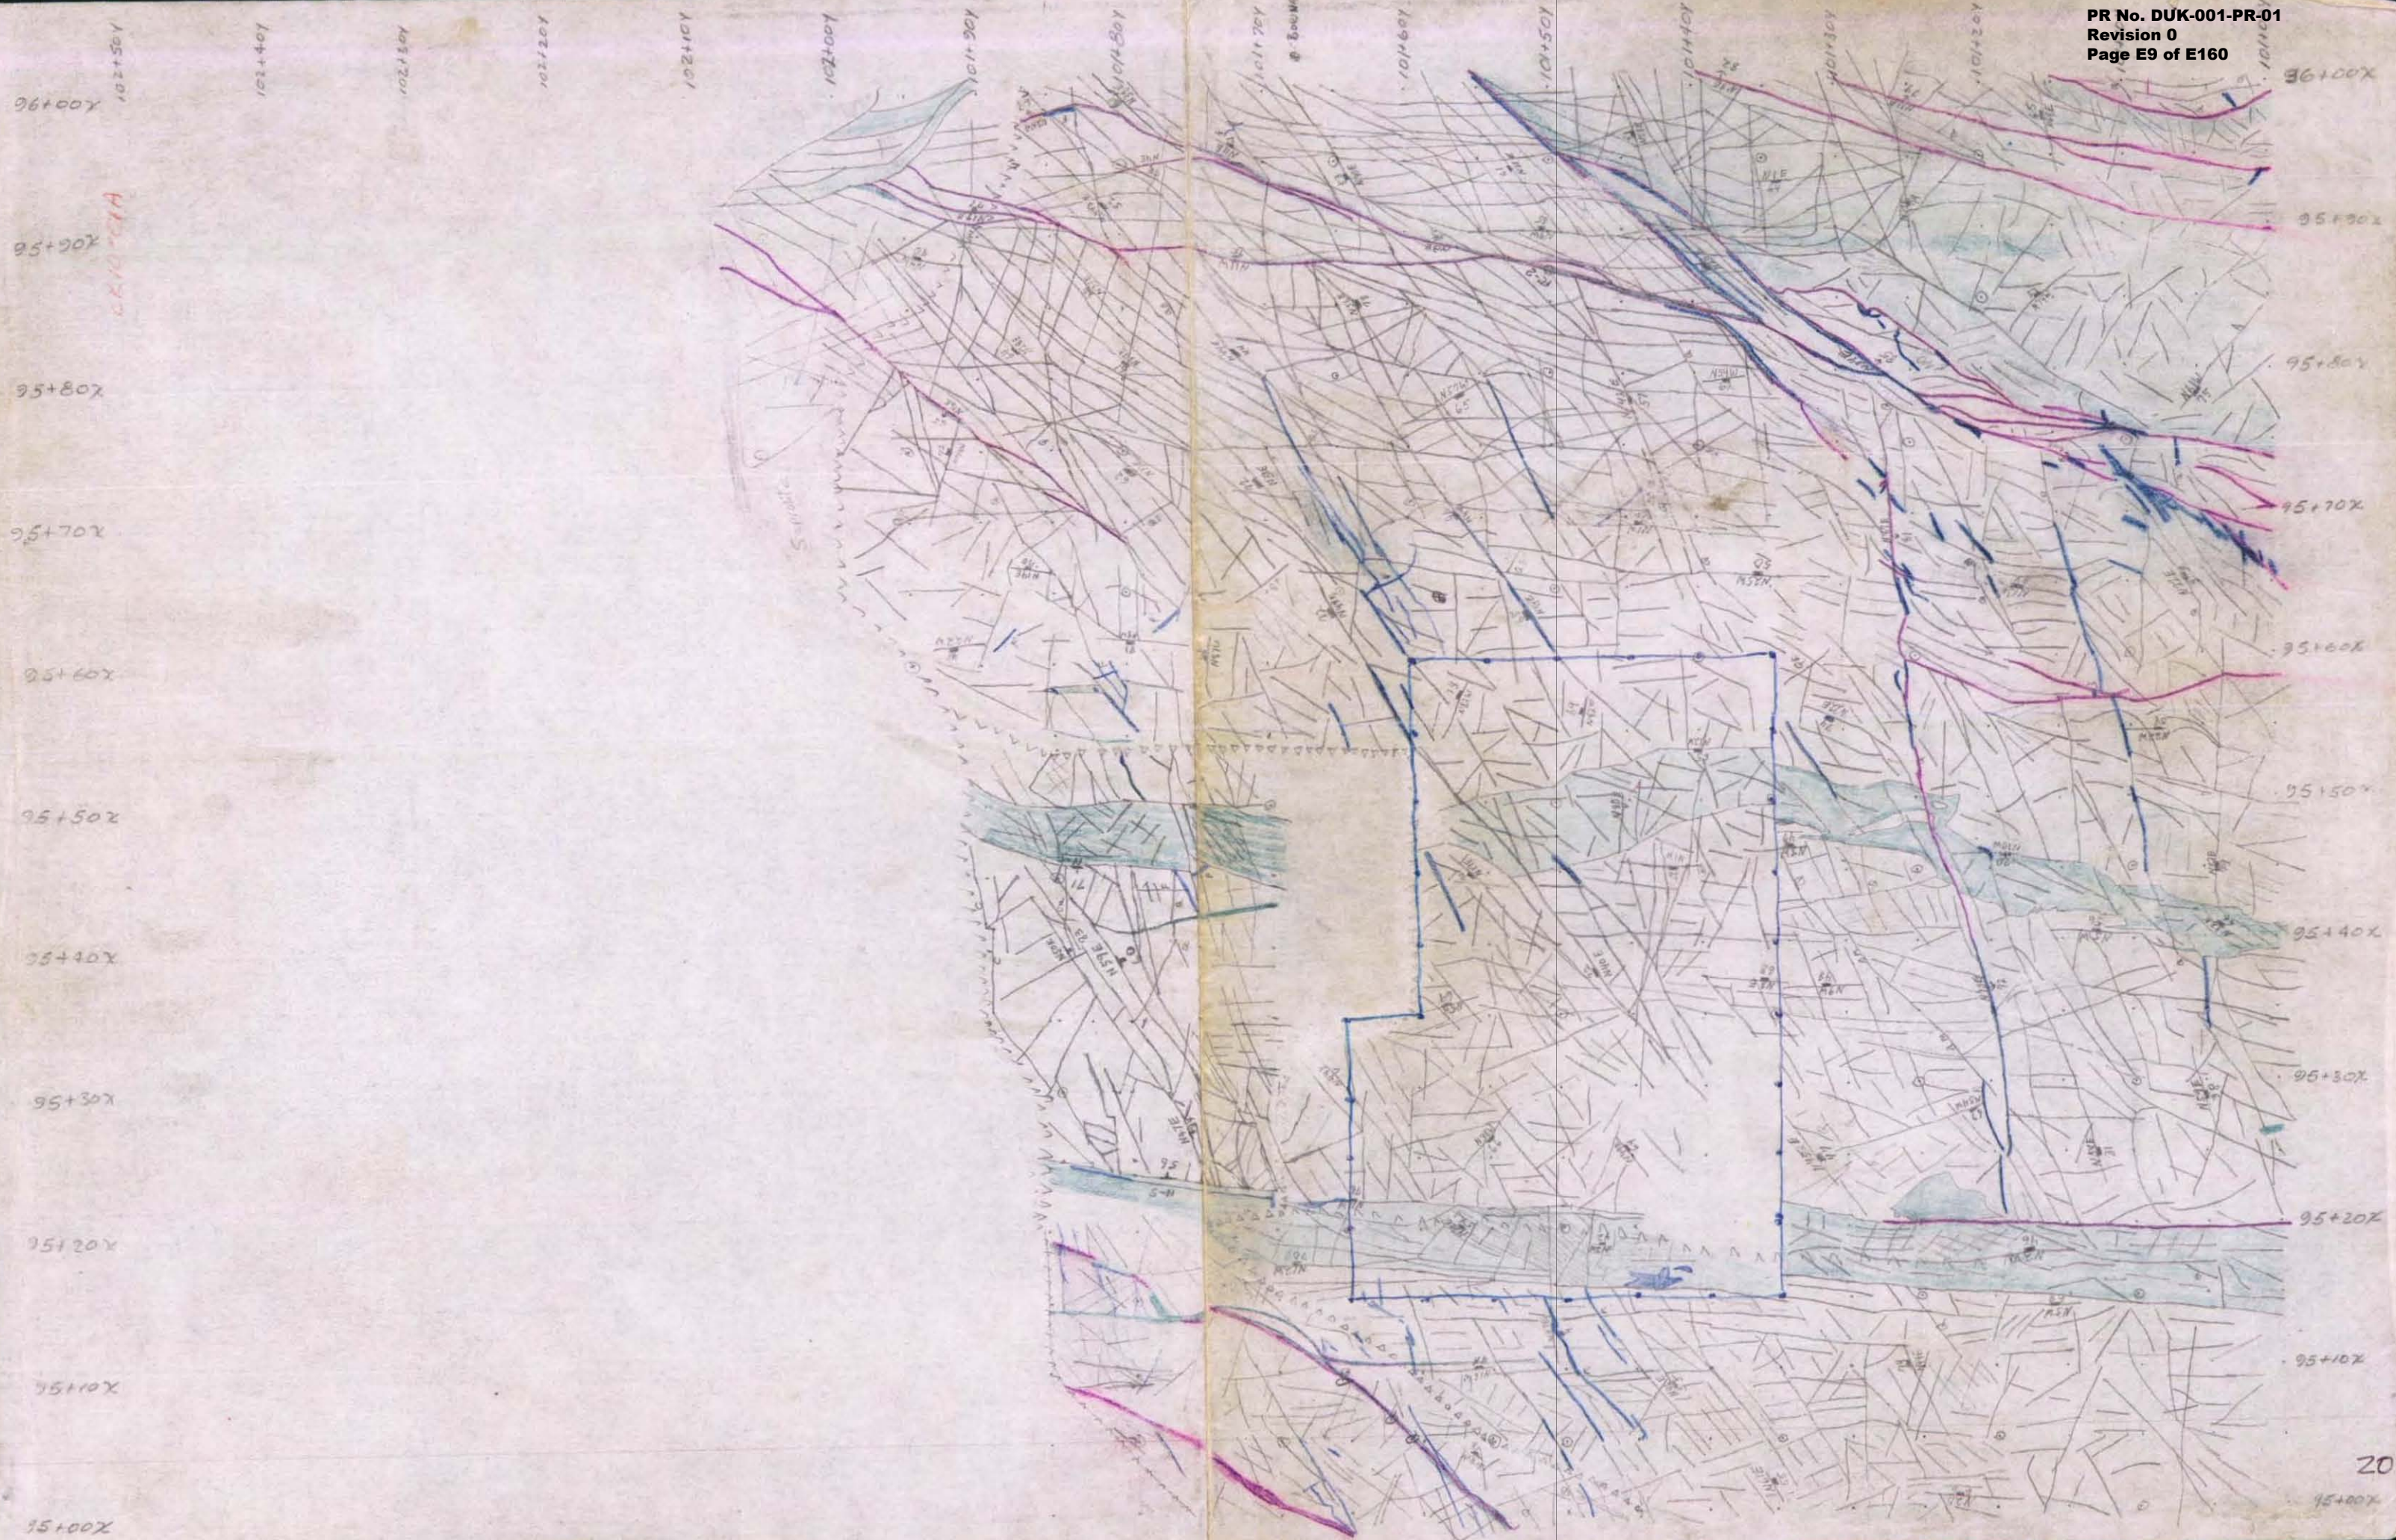

CK 10-01A

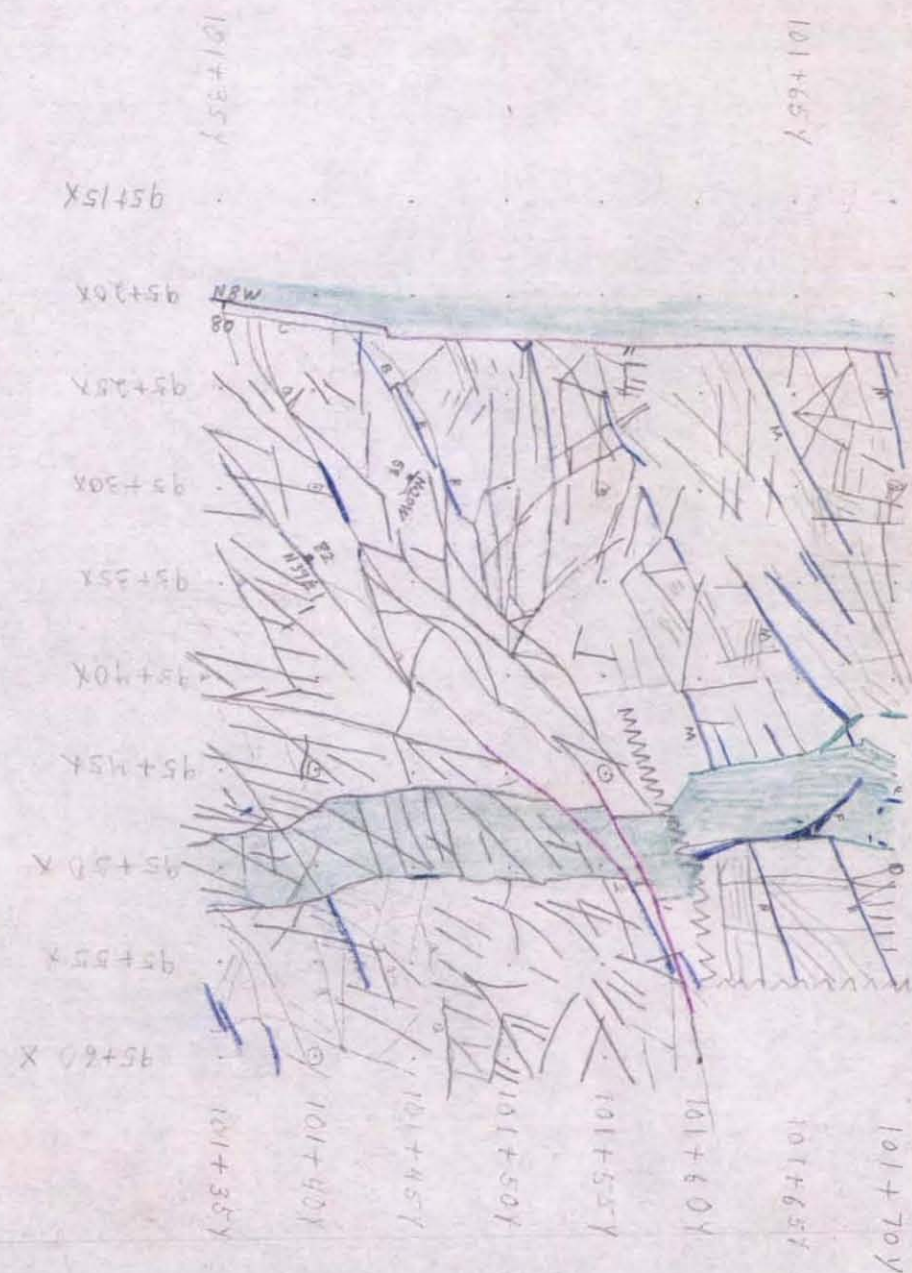


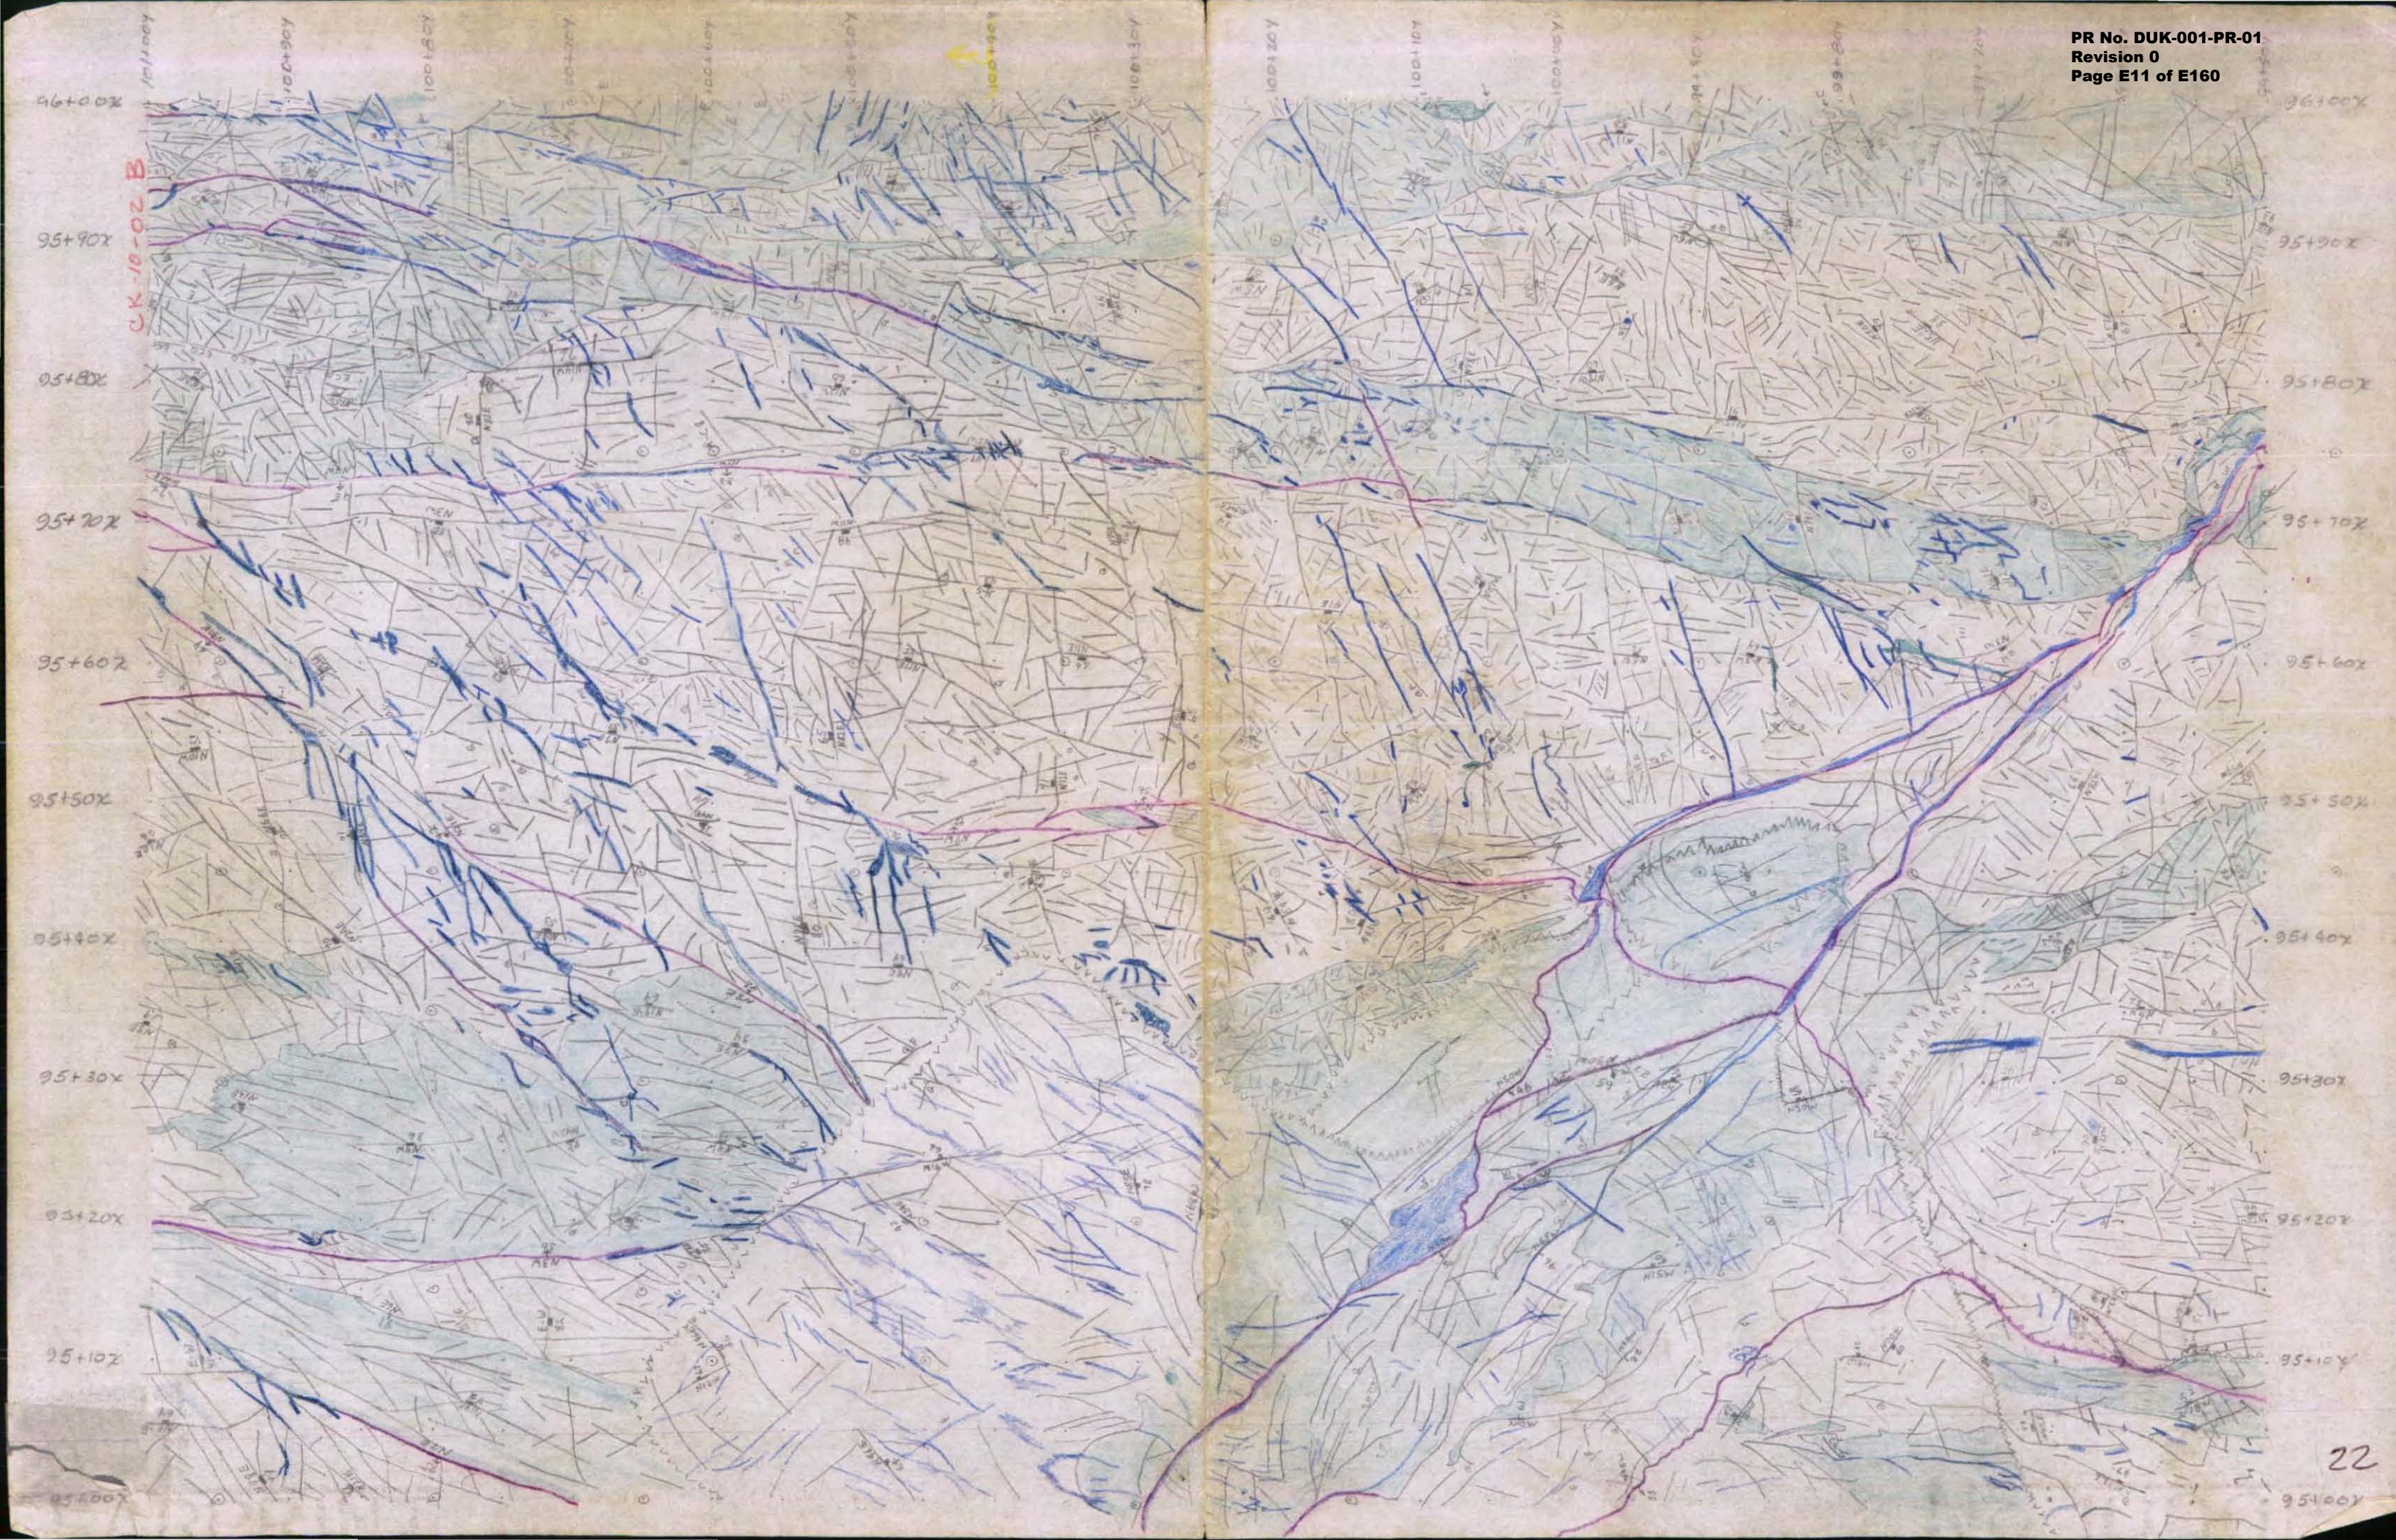


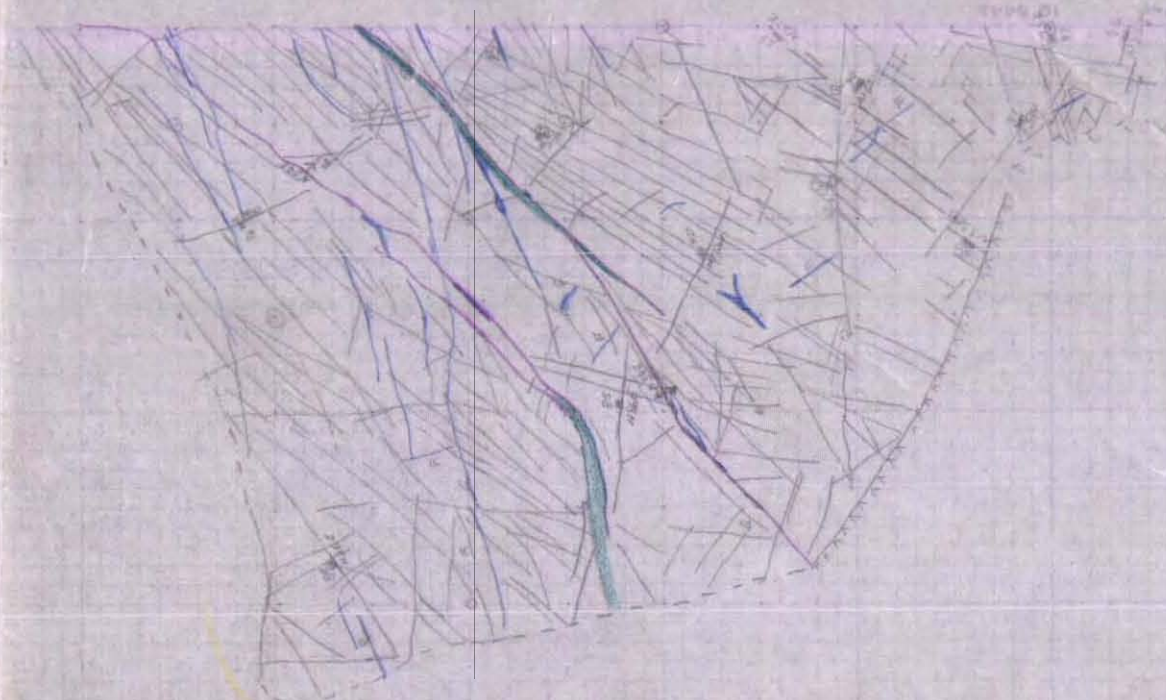



105+60

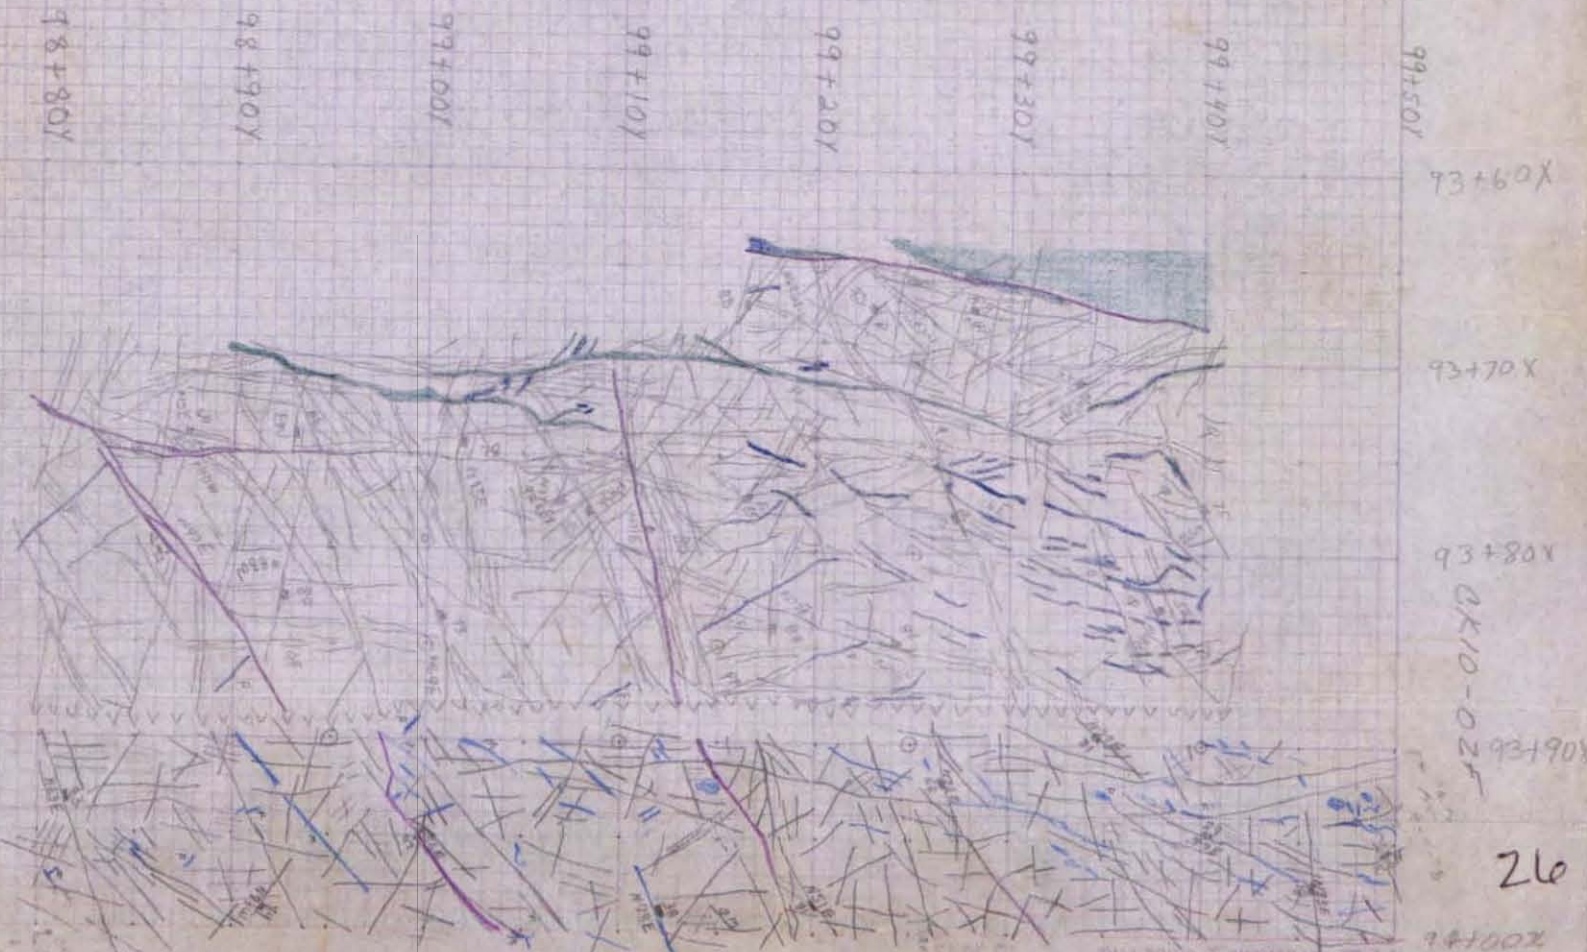

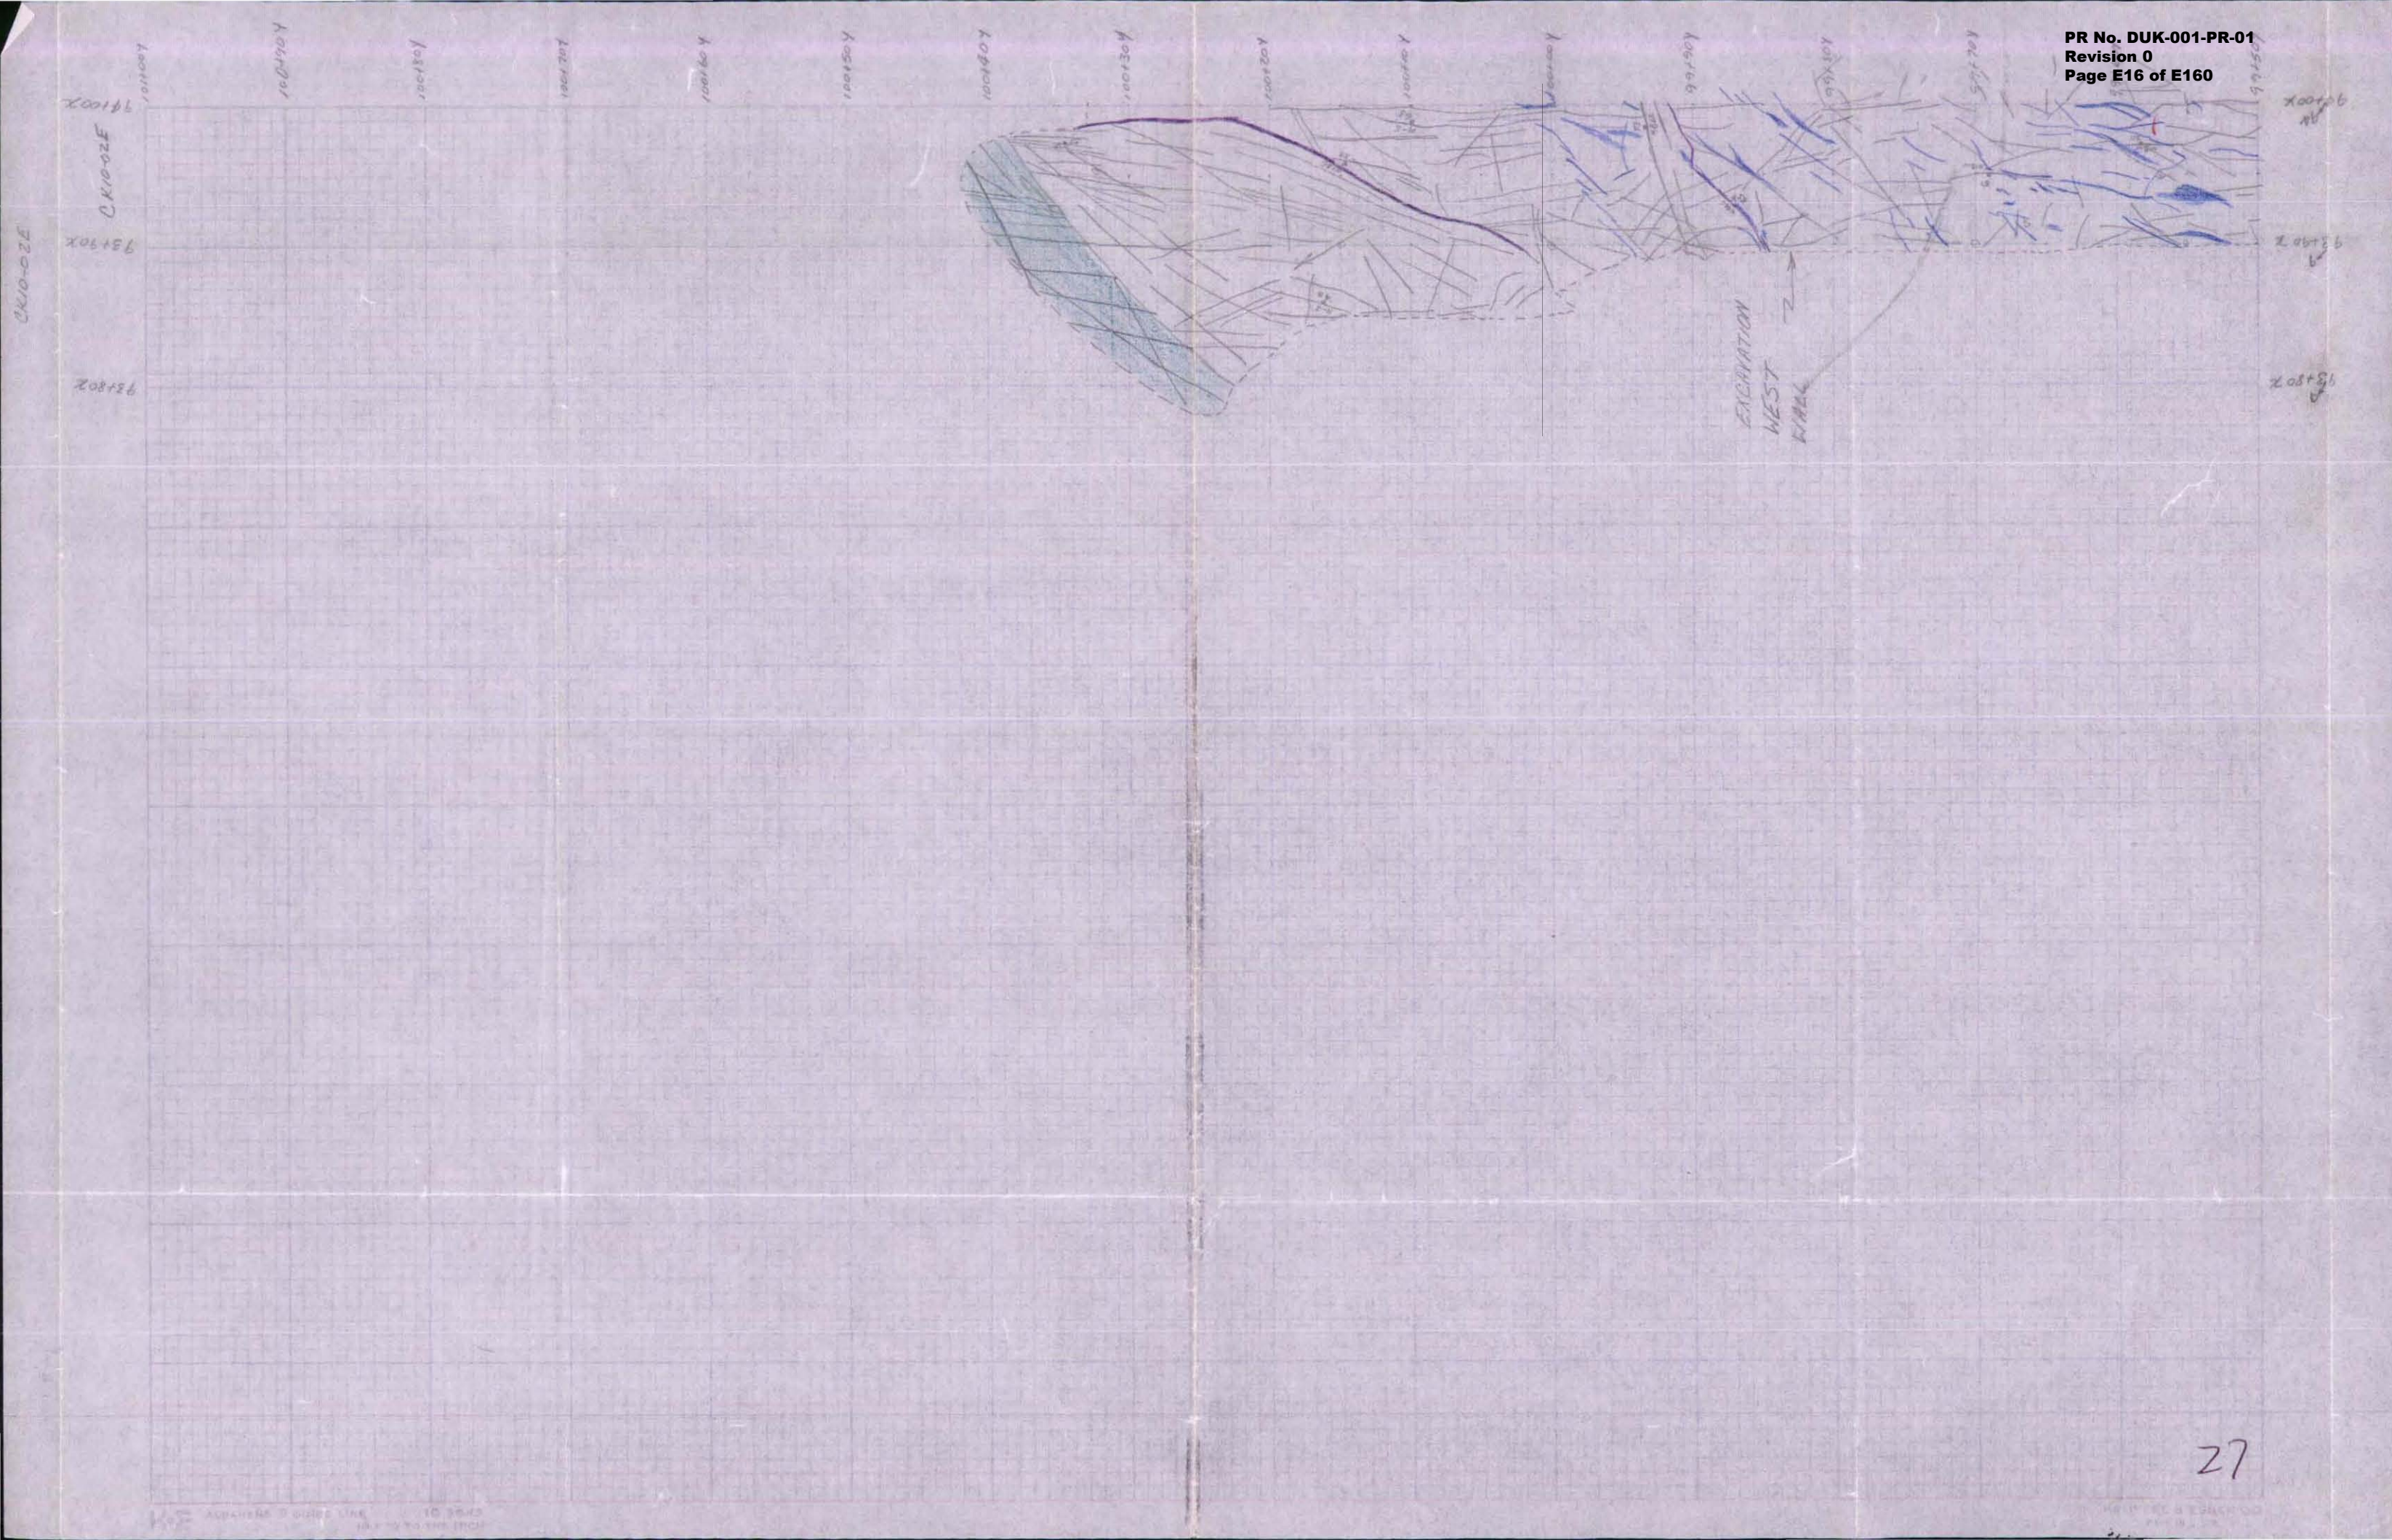



93+

93+00X

93+10X

93+10X

93+20X

93+20X

93+30X

93+30X

93+40X

93+40X

93+50X

93+50X

93+60X

93+60X

93+70X

93+70X

93+80X


93+80X

93+90X

93+90X

94+00X

94+00X

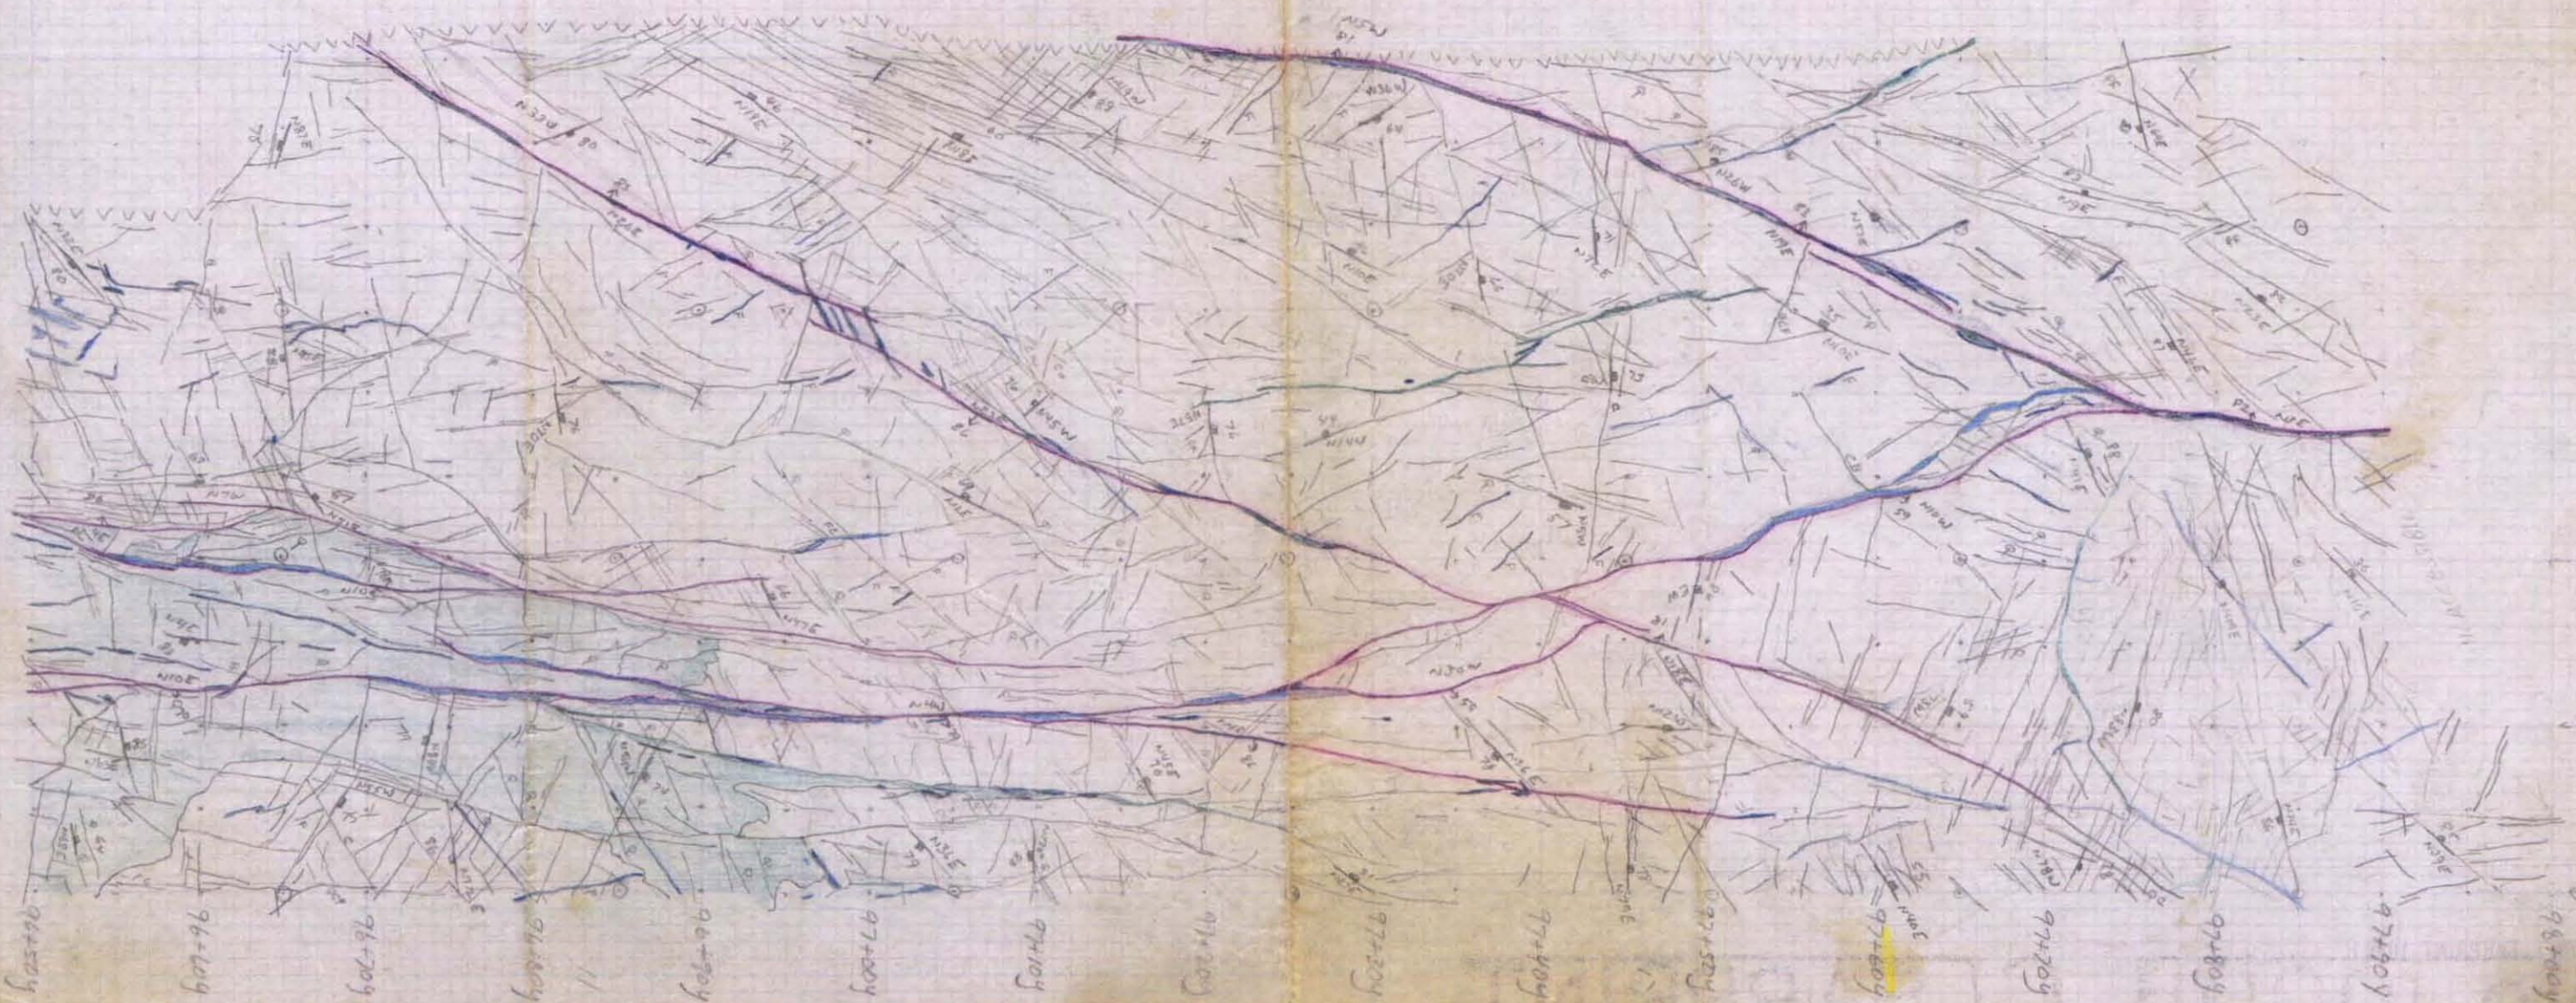





94+10X

 $94 + 20X$

94+30X

94+40

94 + 50K

$$-94+60x$$

94+70%

94480X

941901


35

33

95+00X

95+00X

33

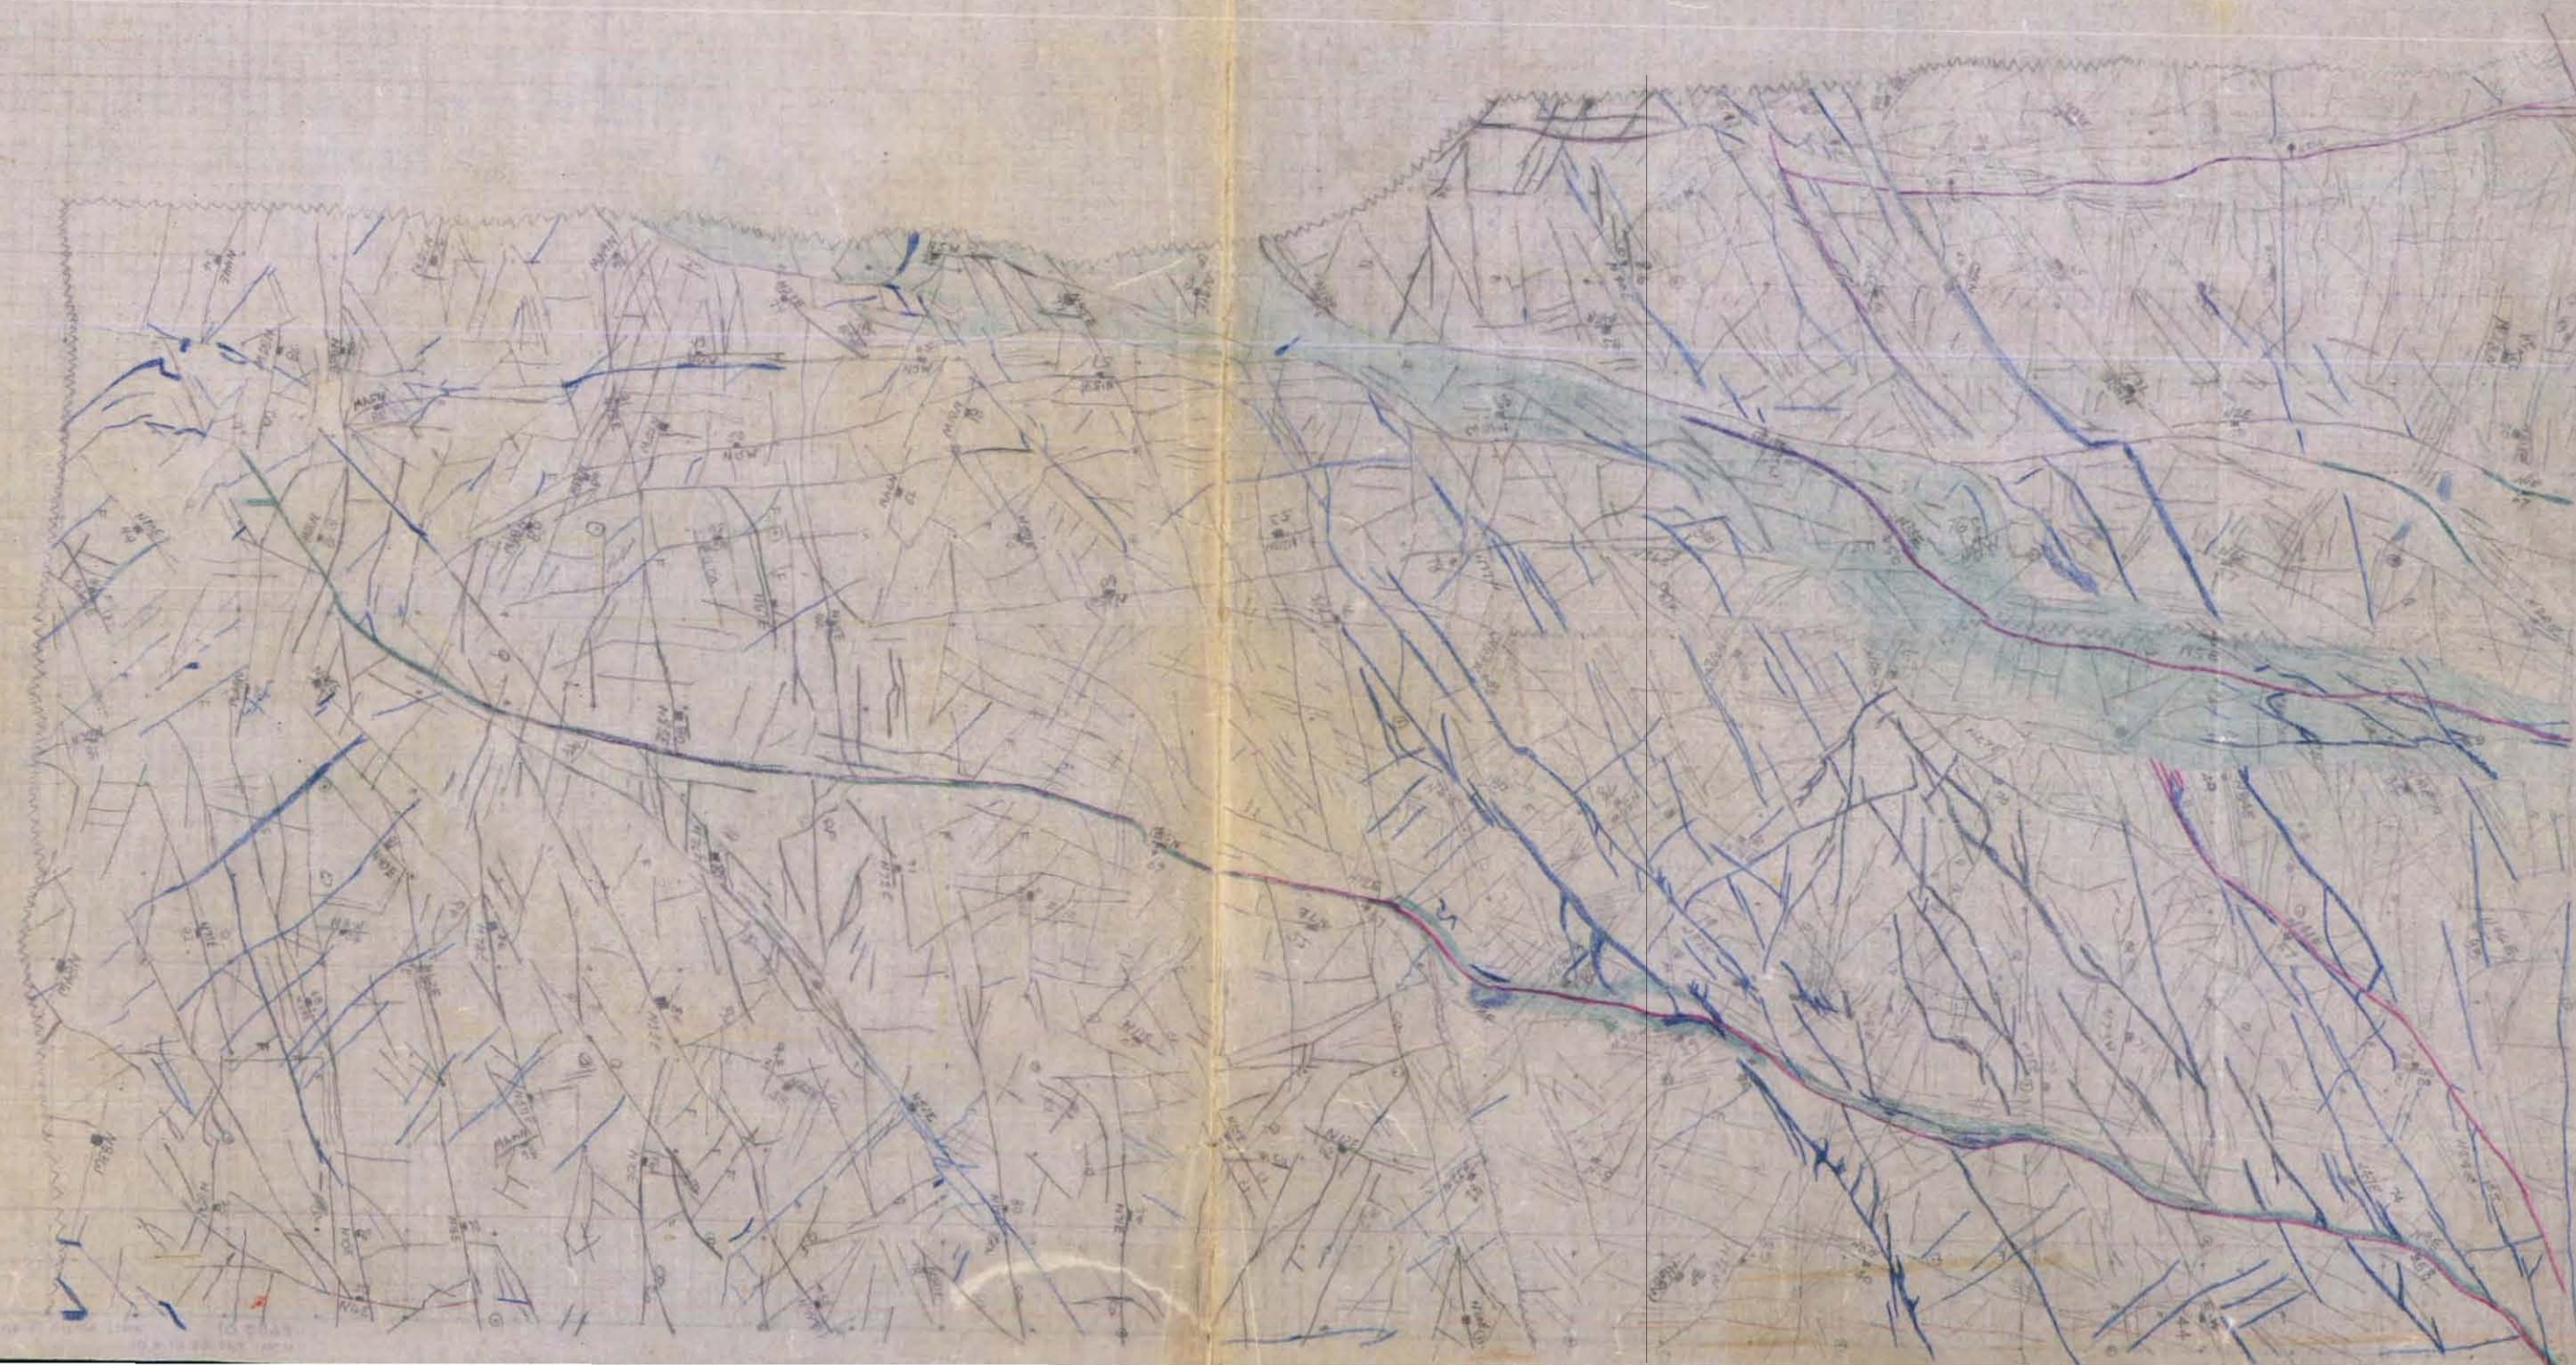

CK10-04B

93+00X
93+10X
93+20X
93+30X
93+40X
93+50X

93+10X

93+00X

93+10X

93+20X

93+30X

93+40X

94+00X

94+00X

94+10X

94+10X

94+20X

94+20X

94+30X

94+30X

94+40X

94+40X

94+50X

94+50X

94+60X

94+60X

94+70X

94+70X

94+80X


94+80X

94+90X


94+90X

95+00X


95+00X

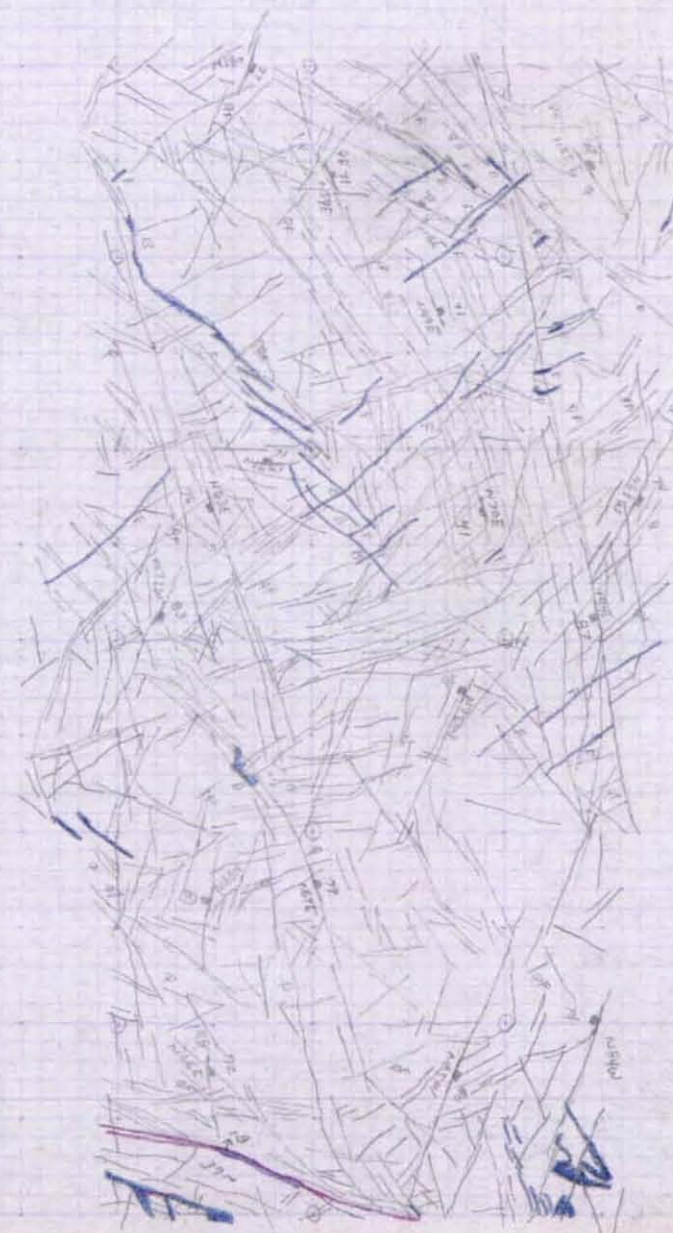

95+00X
95+10X
95+20X
95+30X
95+40X
95+50X
95+60X
95+70X
95+80X
95+90X
96+00X

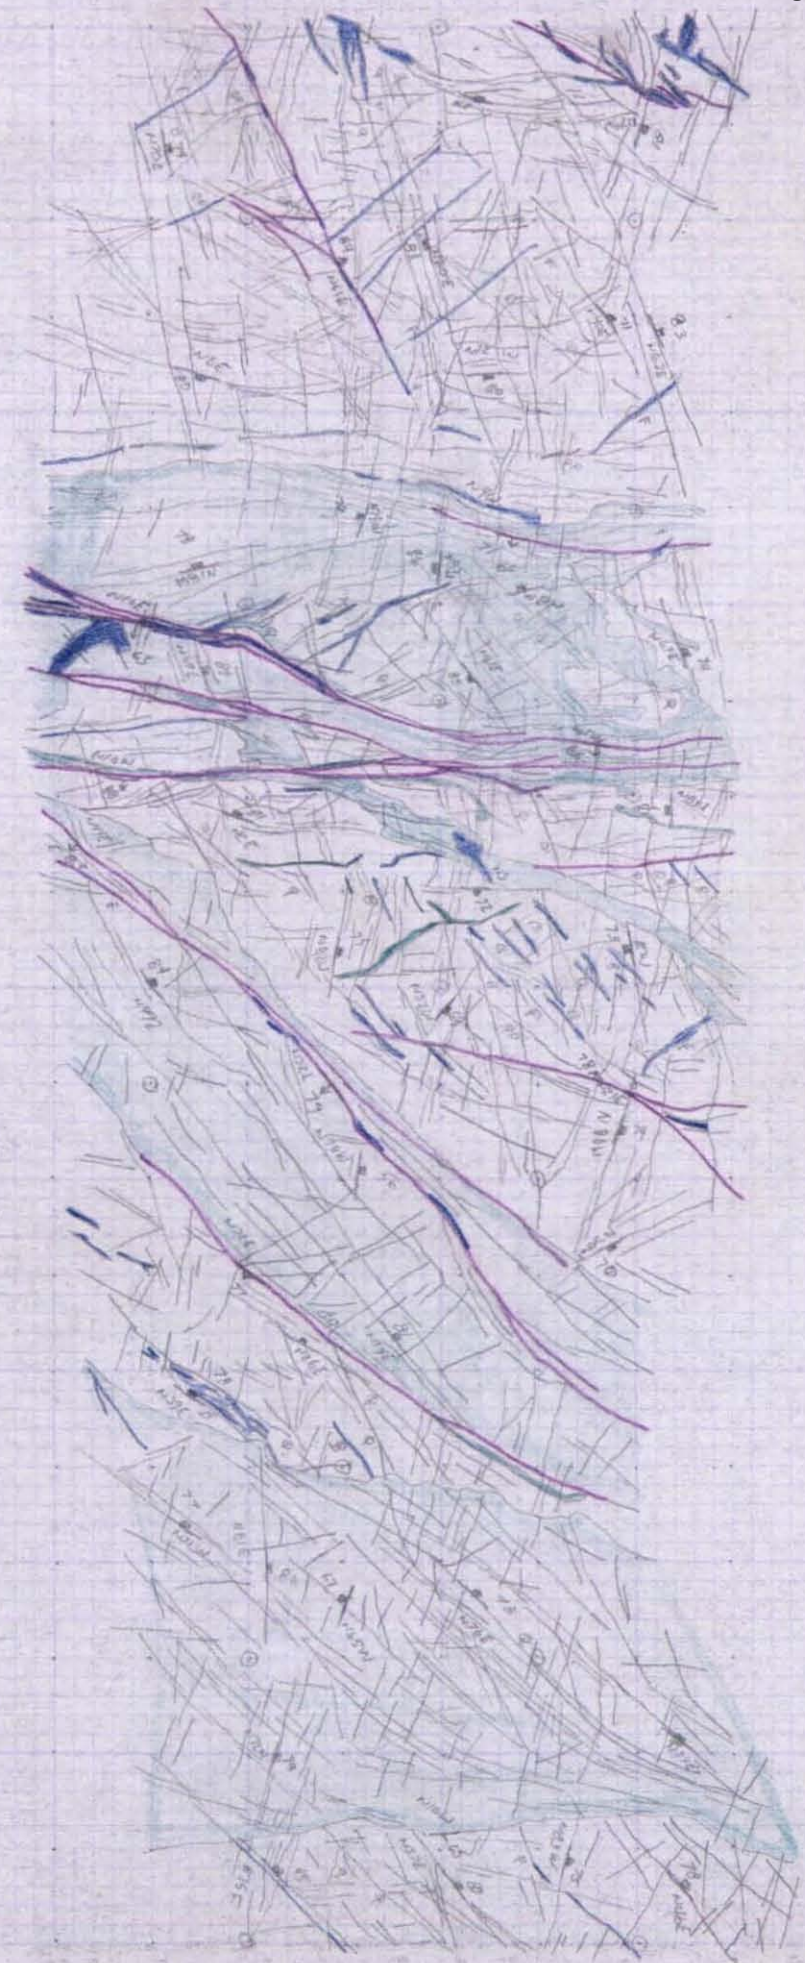

95+00X
95+10X
95+20X
95+30X
95+40X
95+50X
95+60X
95+70X
95+80X
95+90X
96+00X

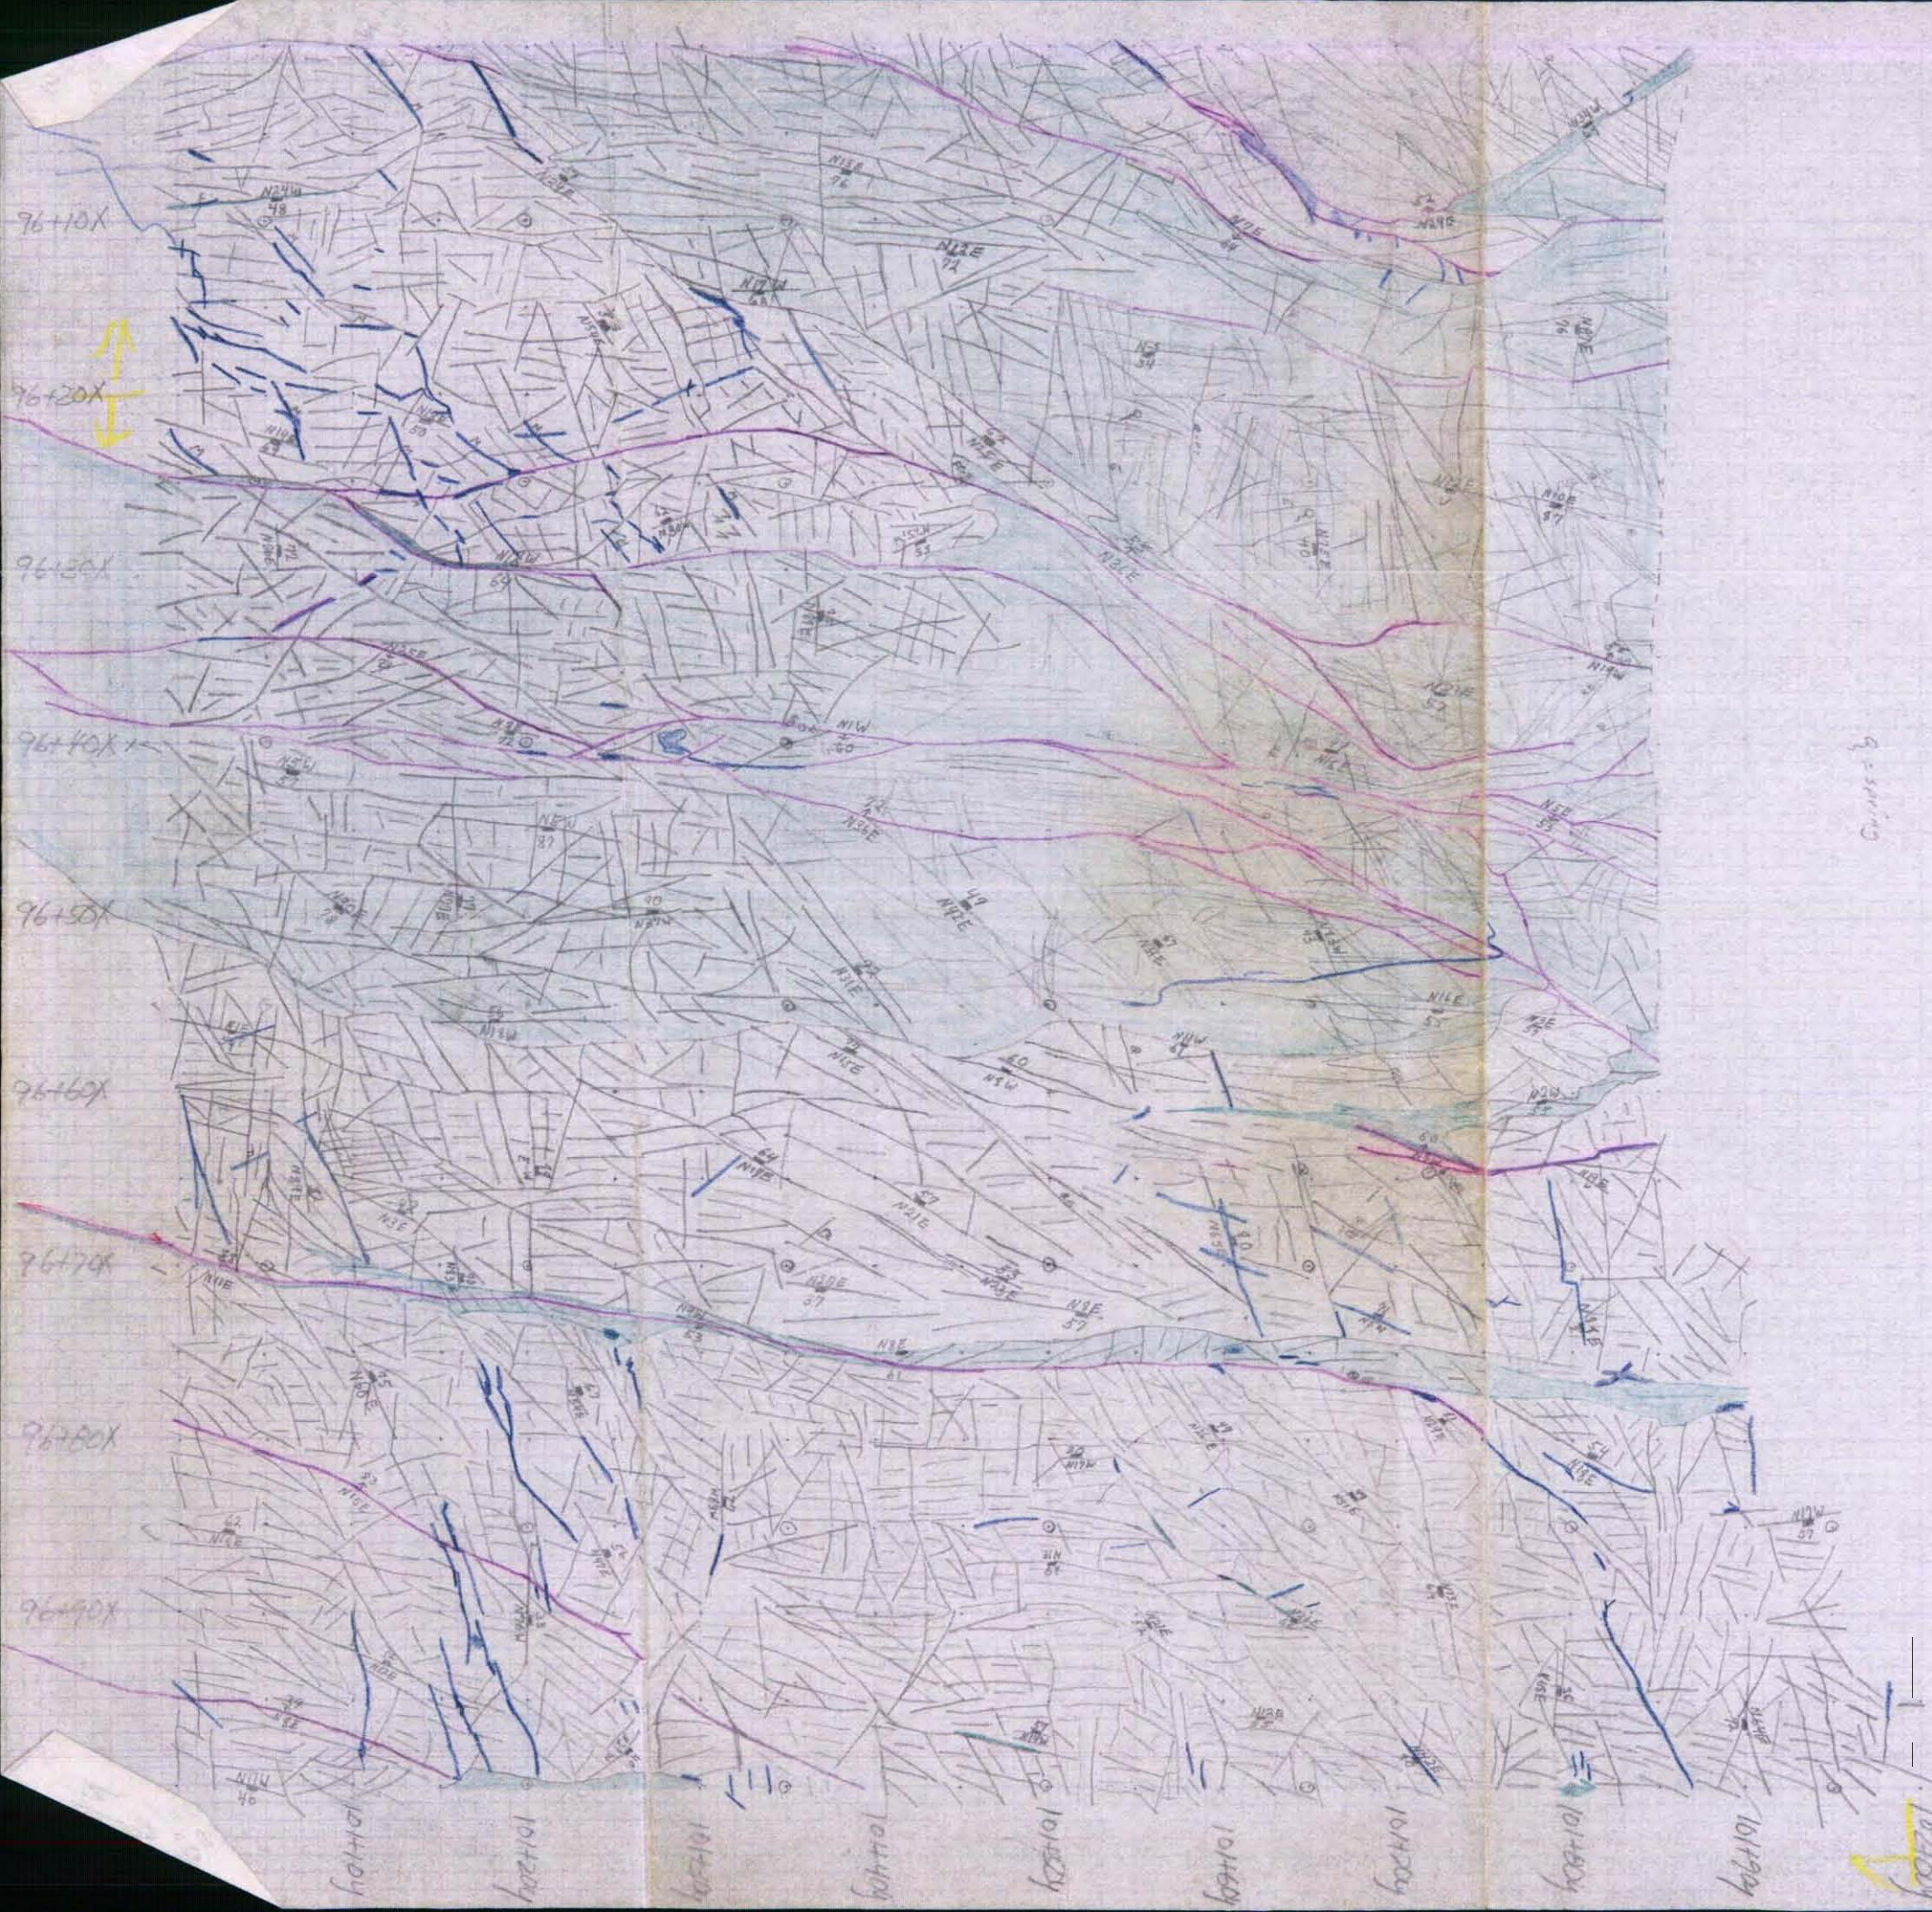

96+10X

96+20X

96+30X

96+40X

96+50X

96+60X

96+70X

96+80X

96+90X

97+00X

97+10X

97+20X

97+30X

97+40X

97+50X

97+60X

97+70X

97+80X

97+90X

98+00X

98+10X

98+20X

98+30X

98+40X

98+50X

98+60X

98+70X

98+80X

98+90X

99+00X

99+10X

99+20X

99+30X

99+40X

99+50X

99+60X

99+70X

99+80X

99+90X

100+00X

100+10X

100+20X

100+30X

100+40X

100+50X

100+60X

100+70X

100+80X

100+90X

101+00X

101+10X

101+20X

101+30X

101+40X

101+50X

101+60X

101+70X

101+80X

101+90X

102+00X

102+10X

102+20X

102+30X

102+40X

102+50X

102+60X

102+70X

102+80X

102+90X

103+00X

103+10X

103+20X

103+30X

103+40X

103+50X

103+60X

103+70X

103+80X

103+90X

104+00X

104+10X

104+20X

104+30X

104+40X

104+50X

104+60X

104+70X

104+80X

104+90X

105+00X

105+10X

105+20X

105+30X

105+40X

105+50X

105+60X

105+70X

105+80X

105+90X

106+00X

106+10X

106+20X

106+30X

106+40X

106+50X

106+60X

106+70X

106+80X

106+90X

107+00X

107+10X

107+20X

107+30X

107+40X

107+50X

107+60X

107+70X

107+80X

107+90X

108+00X

108+10X

108+20X

108+30X

108+40X

108+50X

108+60X

108+70X

108+80X

108+90X

109+00X

109+10X

109+20X

109+30X

109+40X

109+50X

109+60X

109+70X

109+80X

109+90X

110+00X

110+10X

110+20X

110+30X

110+40X

110+50X

110+60X

110+70X

110+80X

110+90X

111+00X

111+10X

111+20X

111+30X

111+40X

111+50X

111+60X

111+70X

111+80X

111+90X

112+00X

112+10X

112+20X

112+30X

112+40X

112+50X

112+60X

112+70X

112+80X

112+90X

113+00X

113+10X

113+20X

113+30X

113+40X

113+50X

113+60X

113+70X

113+80X

113+90X

114+00X

114+10X

114+20X

114+30X

114+40X

114+50X

114+60X

114+70X

114+80X

114+90X

115+00X

115+10X

115+20X

115+30X

115+40X

115+50X

115+60X

115+70X

115+80X

115+90X

116+00X

116+10X

116+20X

116+30X

116+40X

116+50X

116+60X

116+70X

116+80X

116+90X

117+00X

117+10X

117+20X

117+30X

117+40X

117+50X

117+60X

117+70X

117+80X

117+90X

118+00X

118+10X

118+20X

118+30X

118+40X

118+50X

118+60X

118+70X

118+80X

118+90X

119+00X

119+10X

119+20X

119+30X

119+40X

119+50X

119+60X

119+70X

119+80X

119+90X

120+00X

120+10X

120+20X

120+30X

120+40X

120+50X

120+60X

120+70X

120+80X

120+90X

121+00X

121+10X

121+20X

121+30X

121+40X

121+50X

121+60X

121+70X

121+80X

121+90X

122+00X

122+10X

122+20X

122+30X

122+40X

122+50X

122+60X

122+70X

122+80X

122+90X

123+00X

123+10X

123+20X

123+30X

123+40X

123+50X

123+60X

123+70X

123+80X

123+90X

124+00X

124+10X

124+20X

124+30X

124+40X


124+50X

124+60X

124+70X

124+80X

124+90X

 $97+201$

1974-80

92440)

92.75 V

22.44V

054


40

9A-10X

17/

19

10

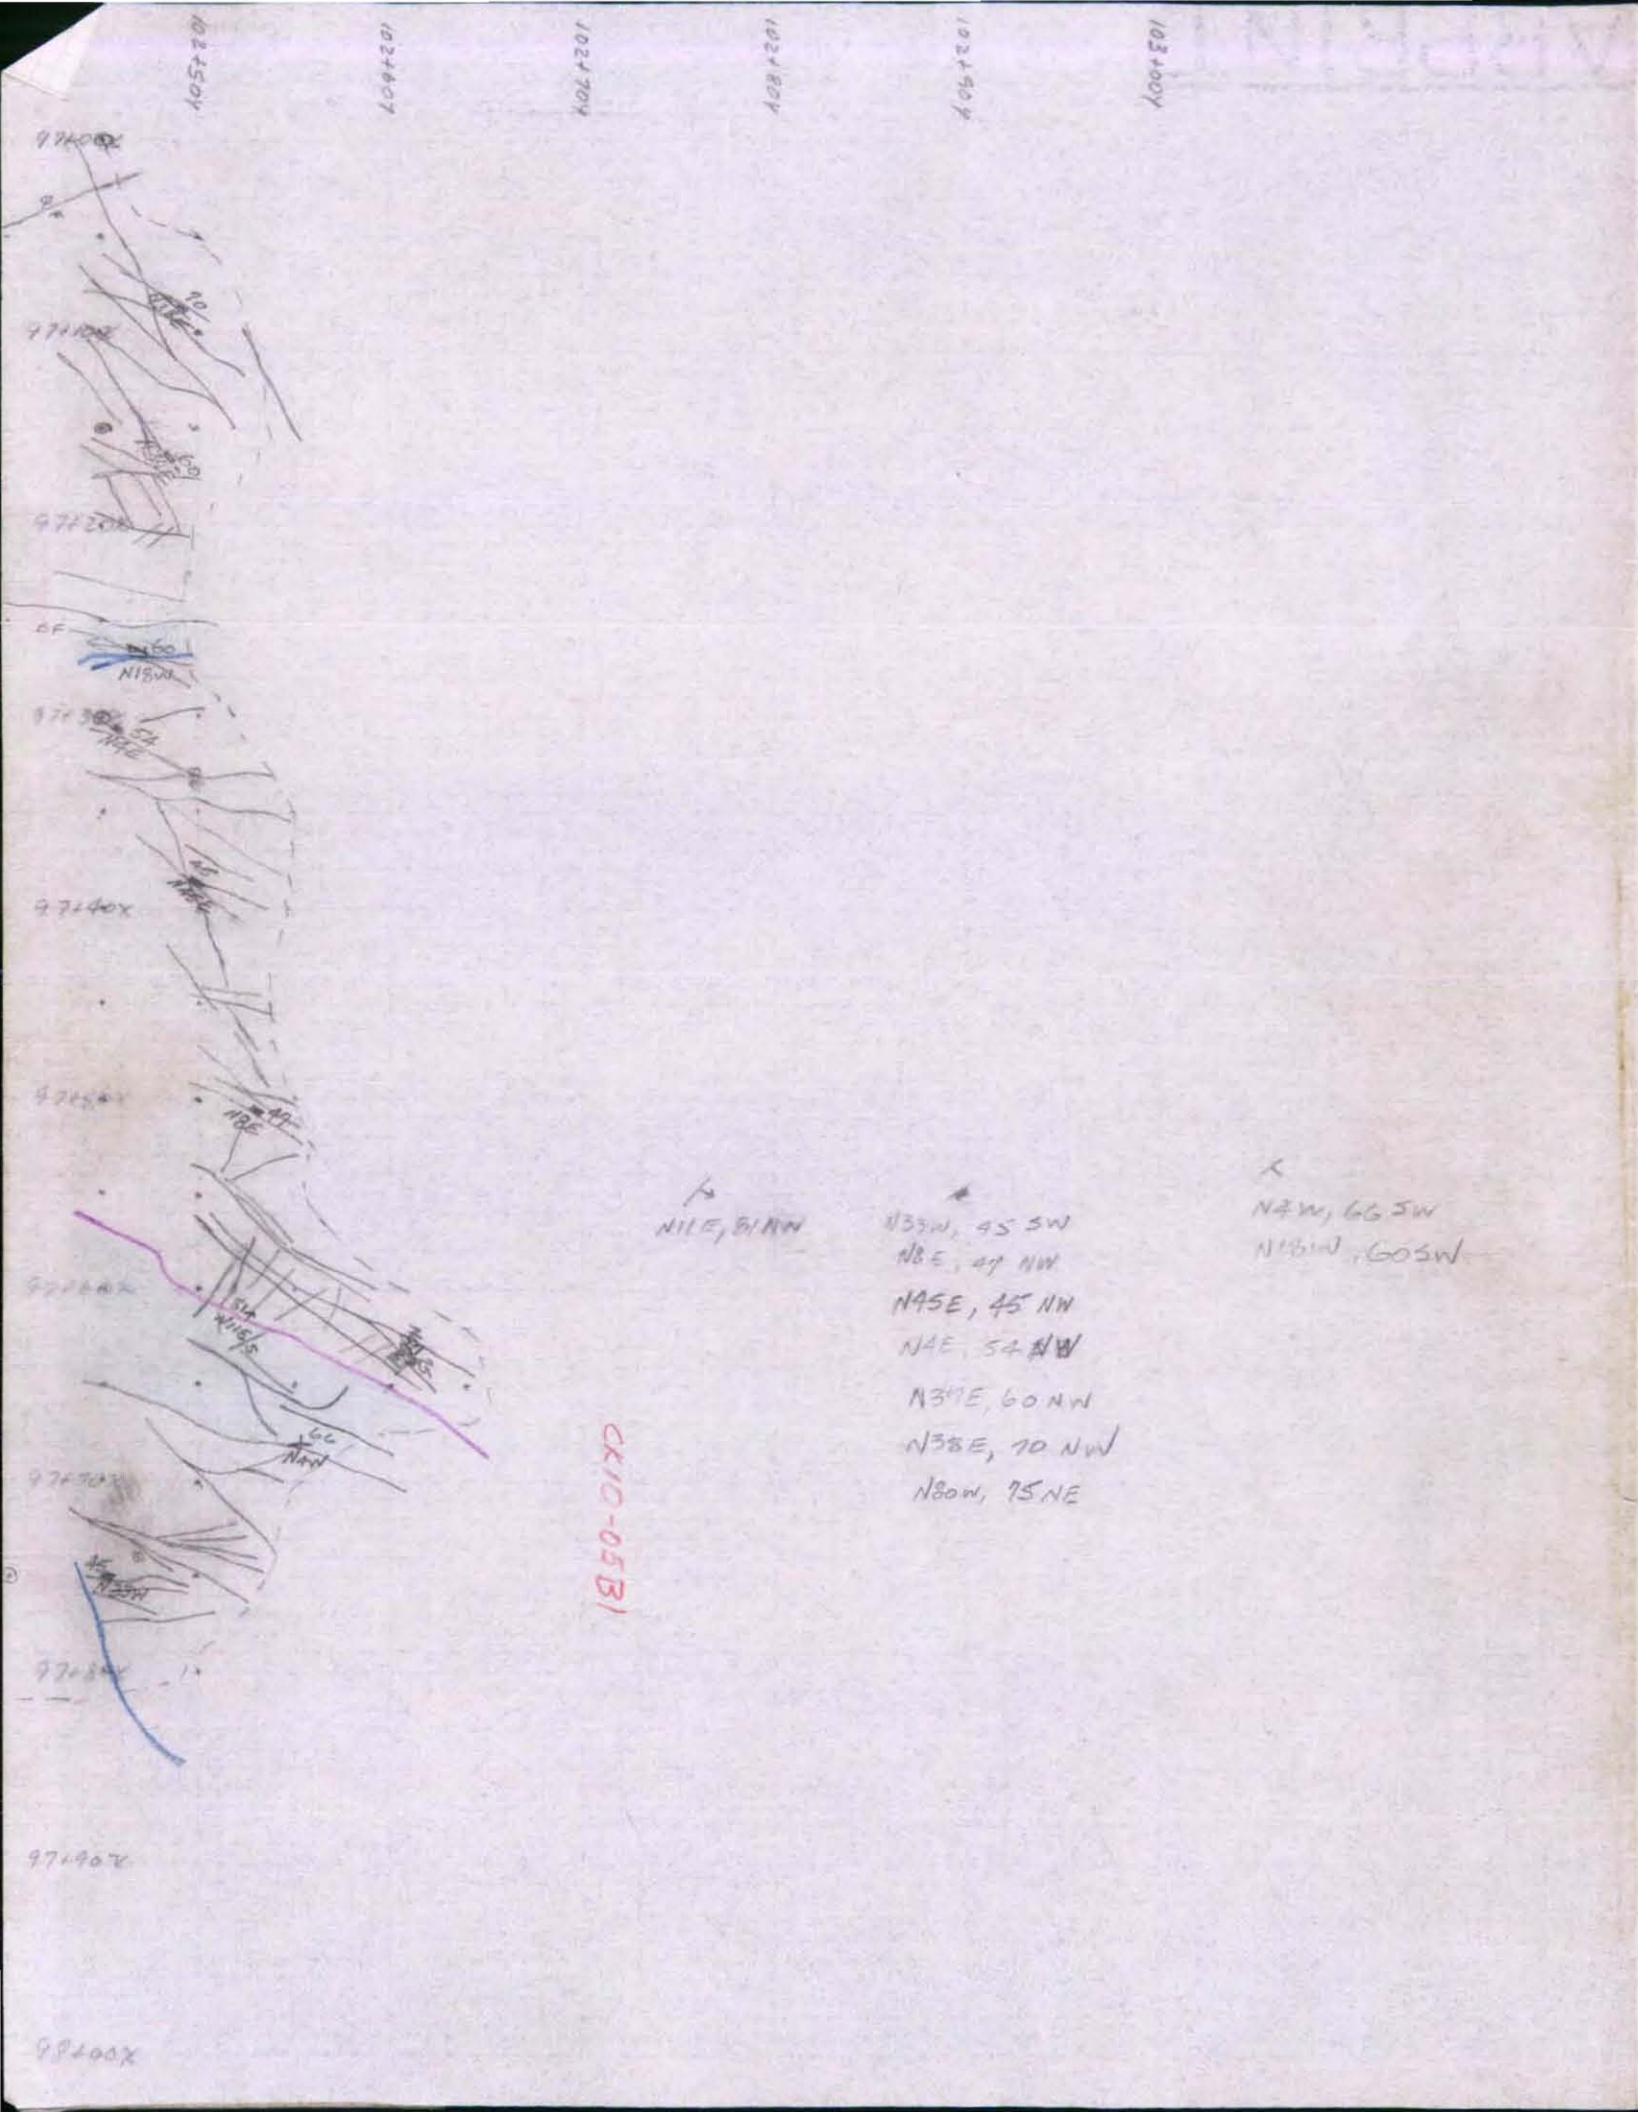




1

464507


75401


964207


97-001

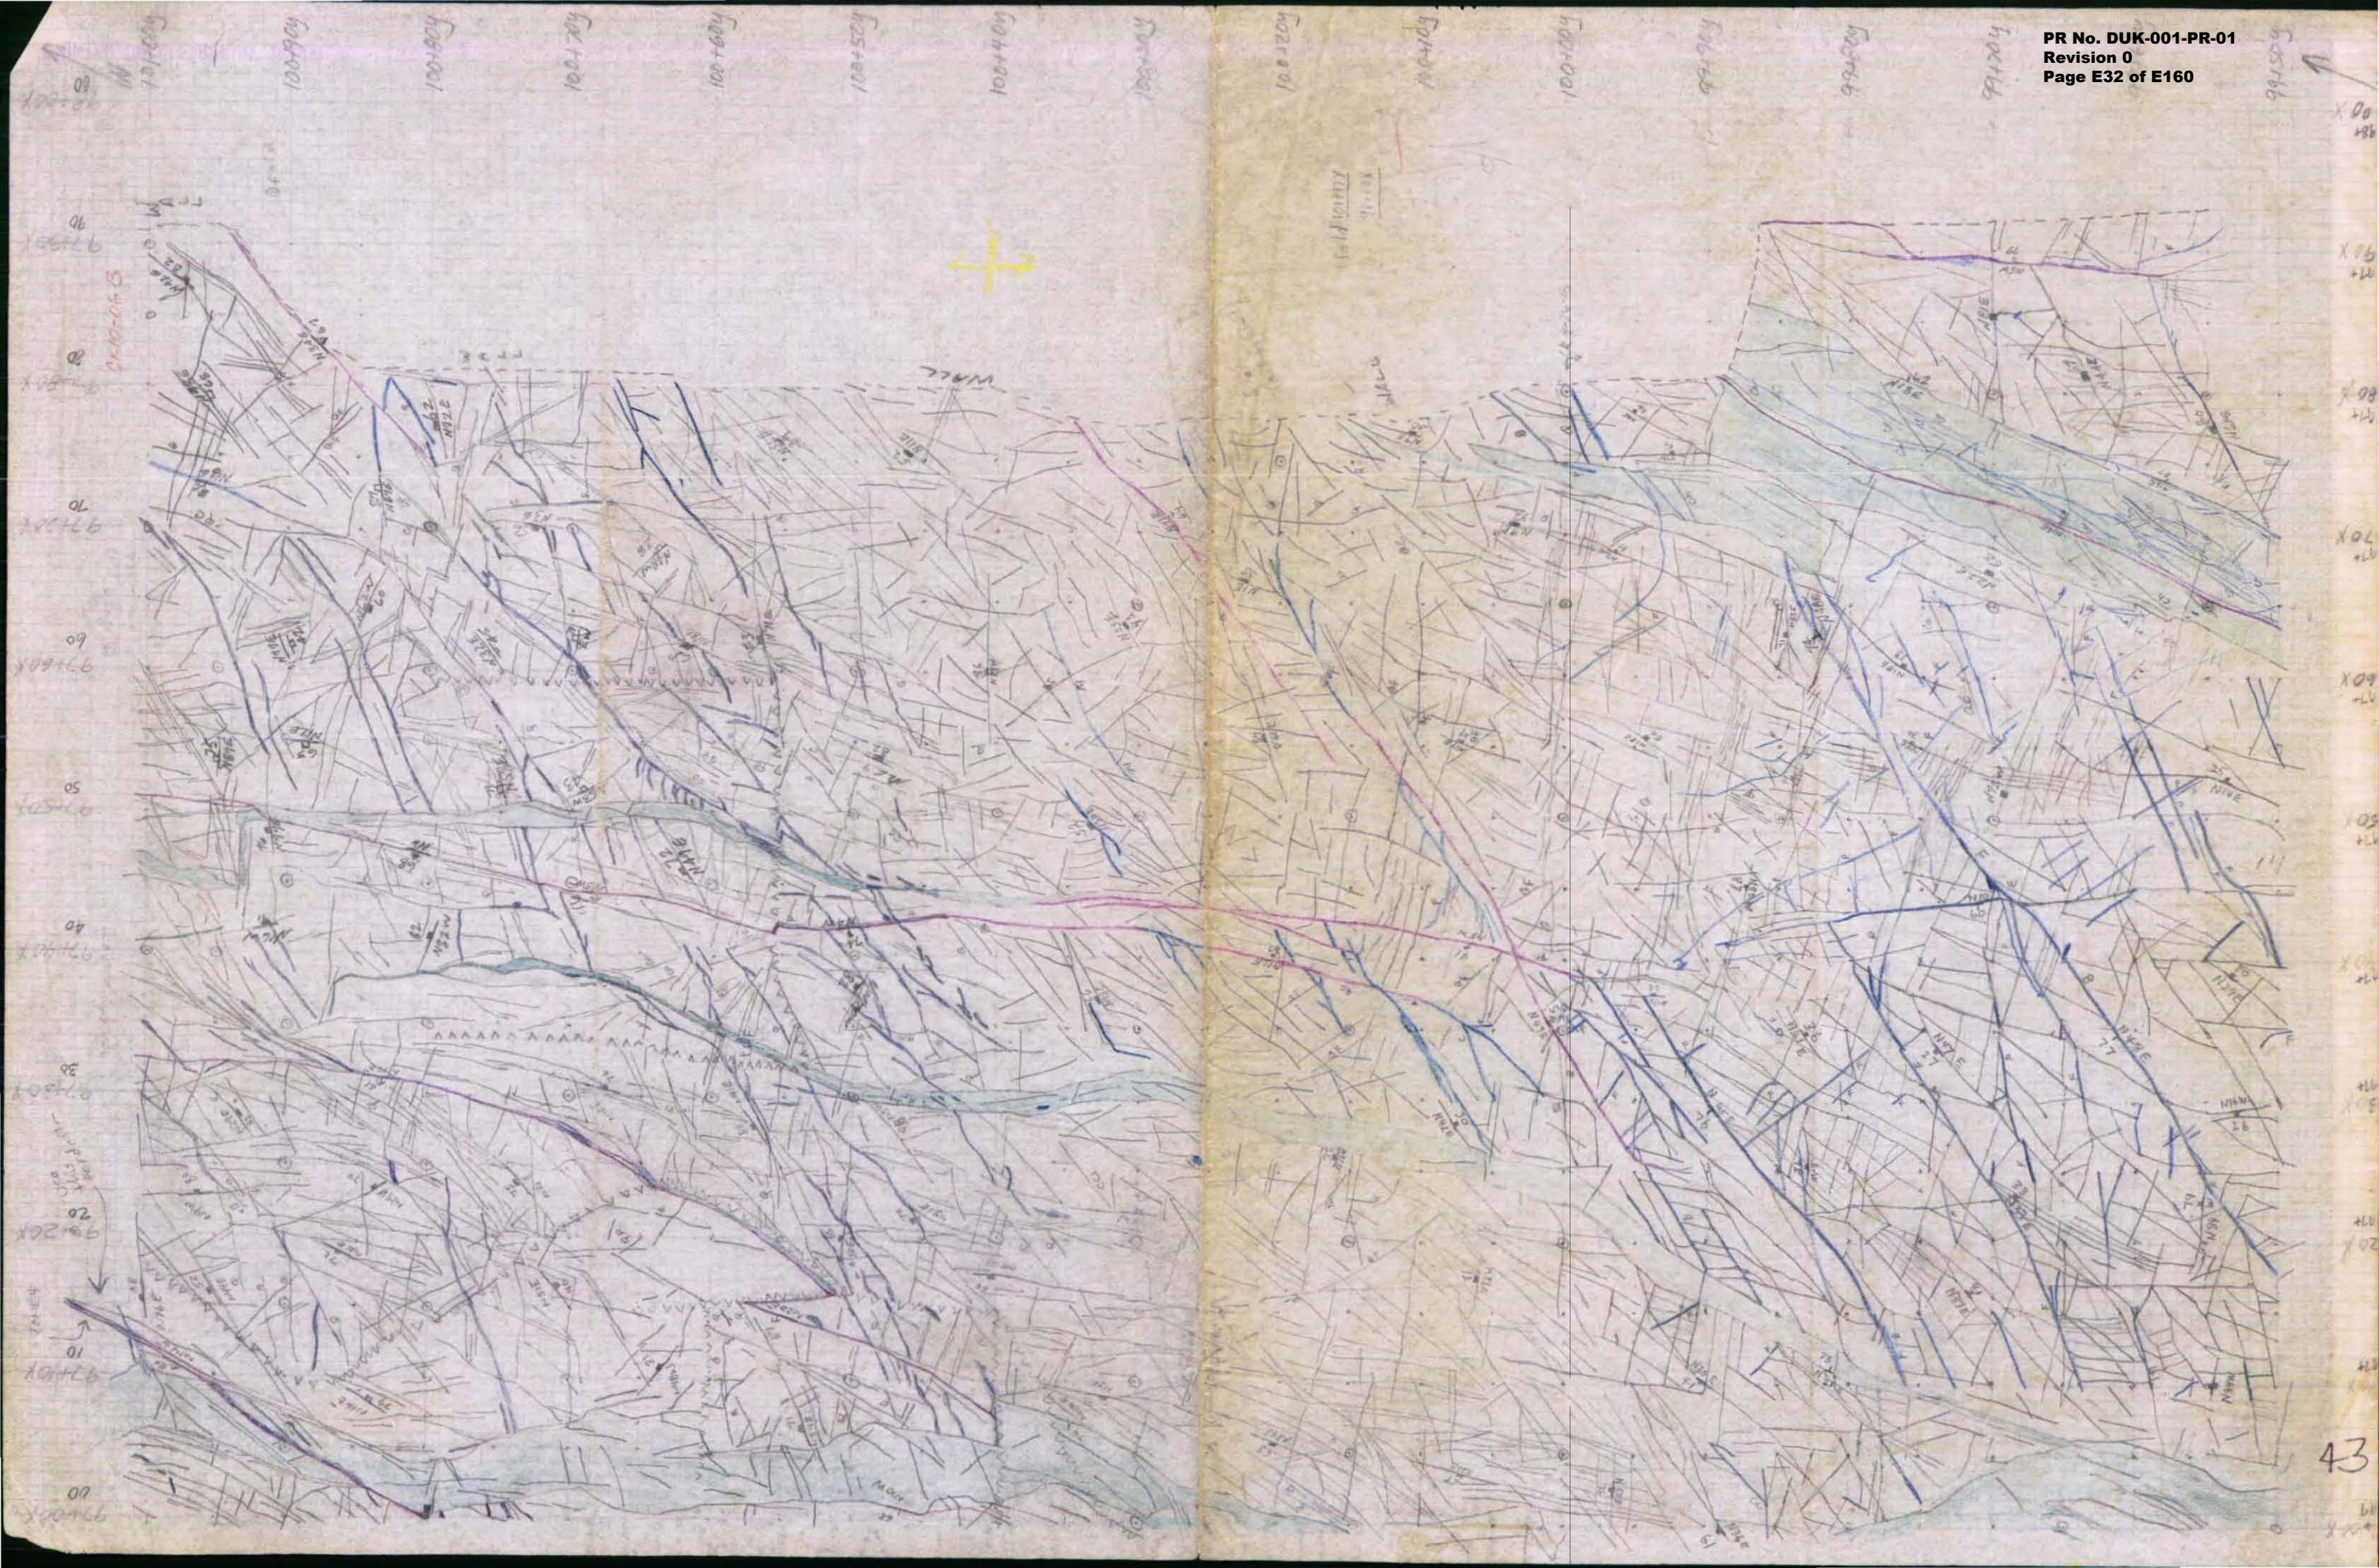







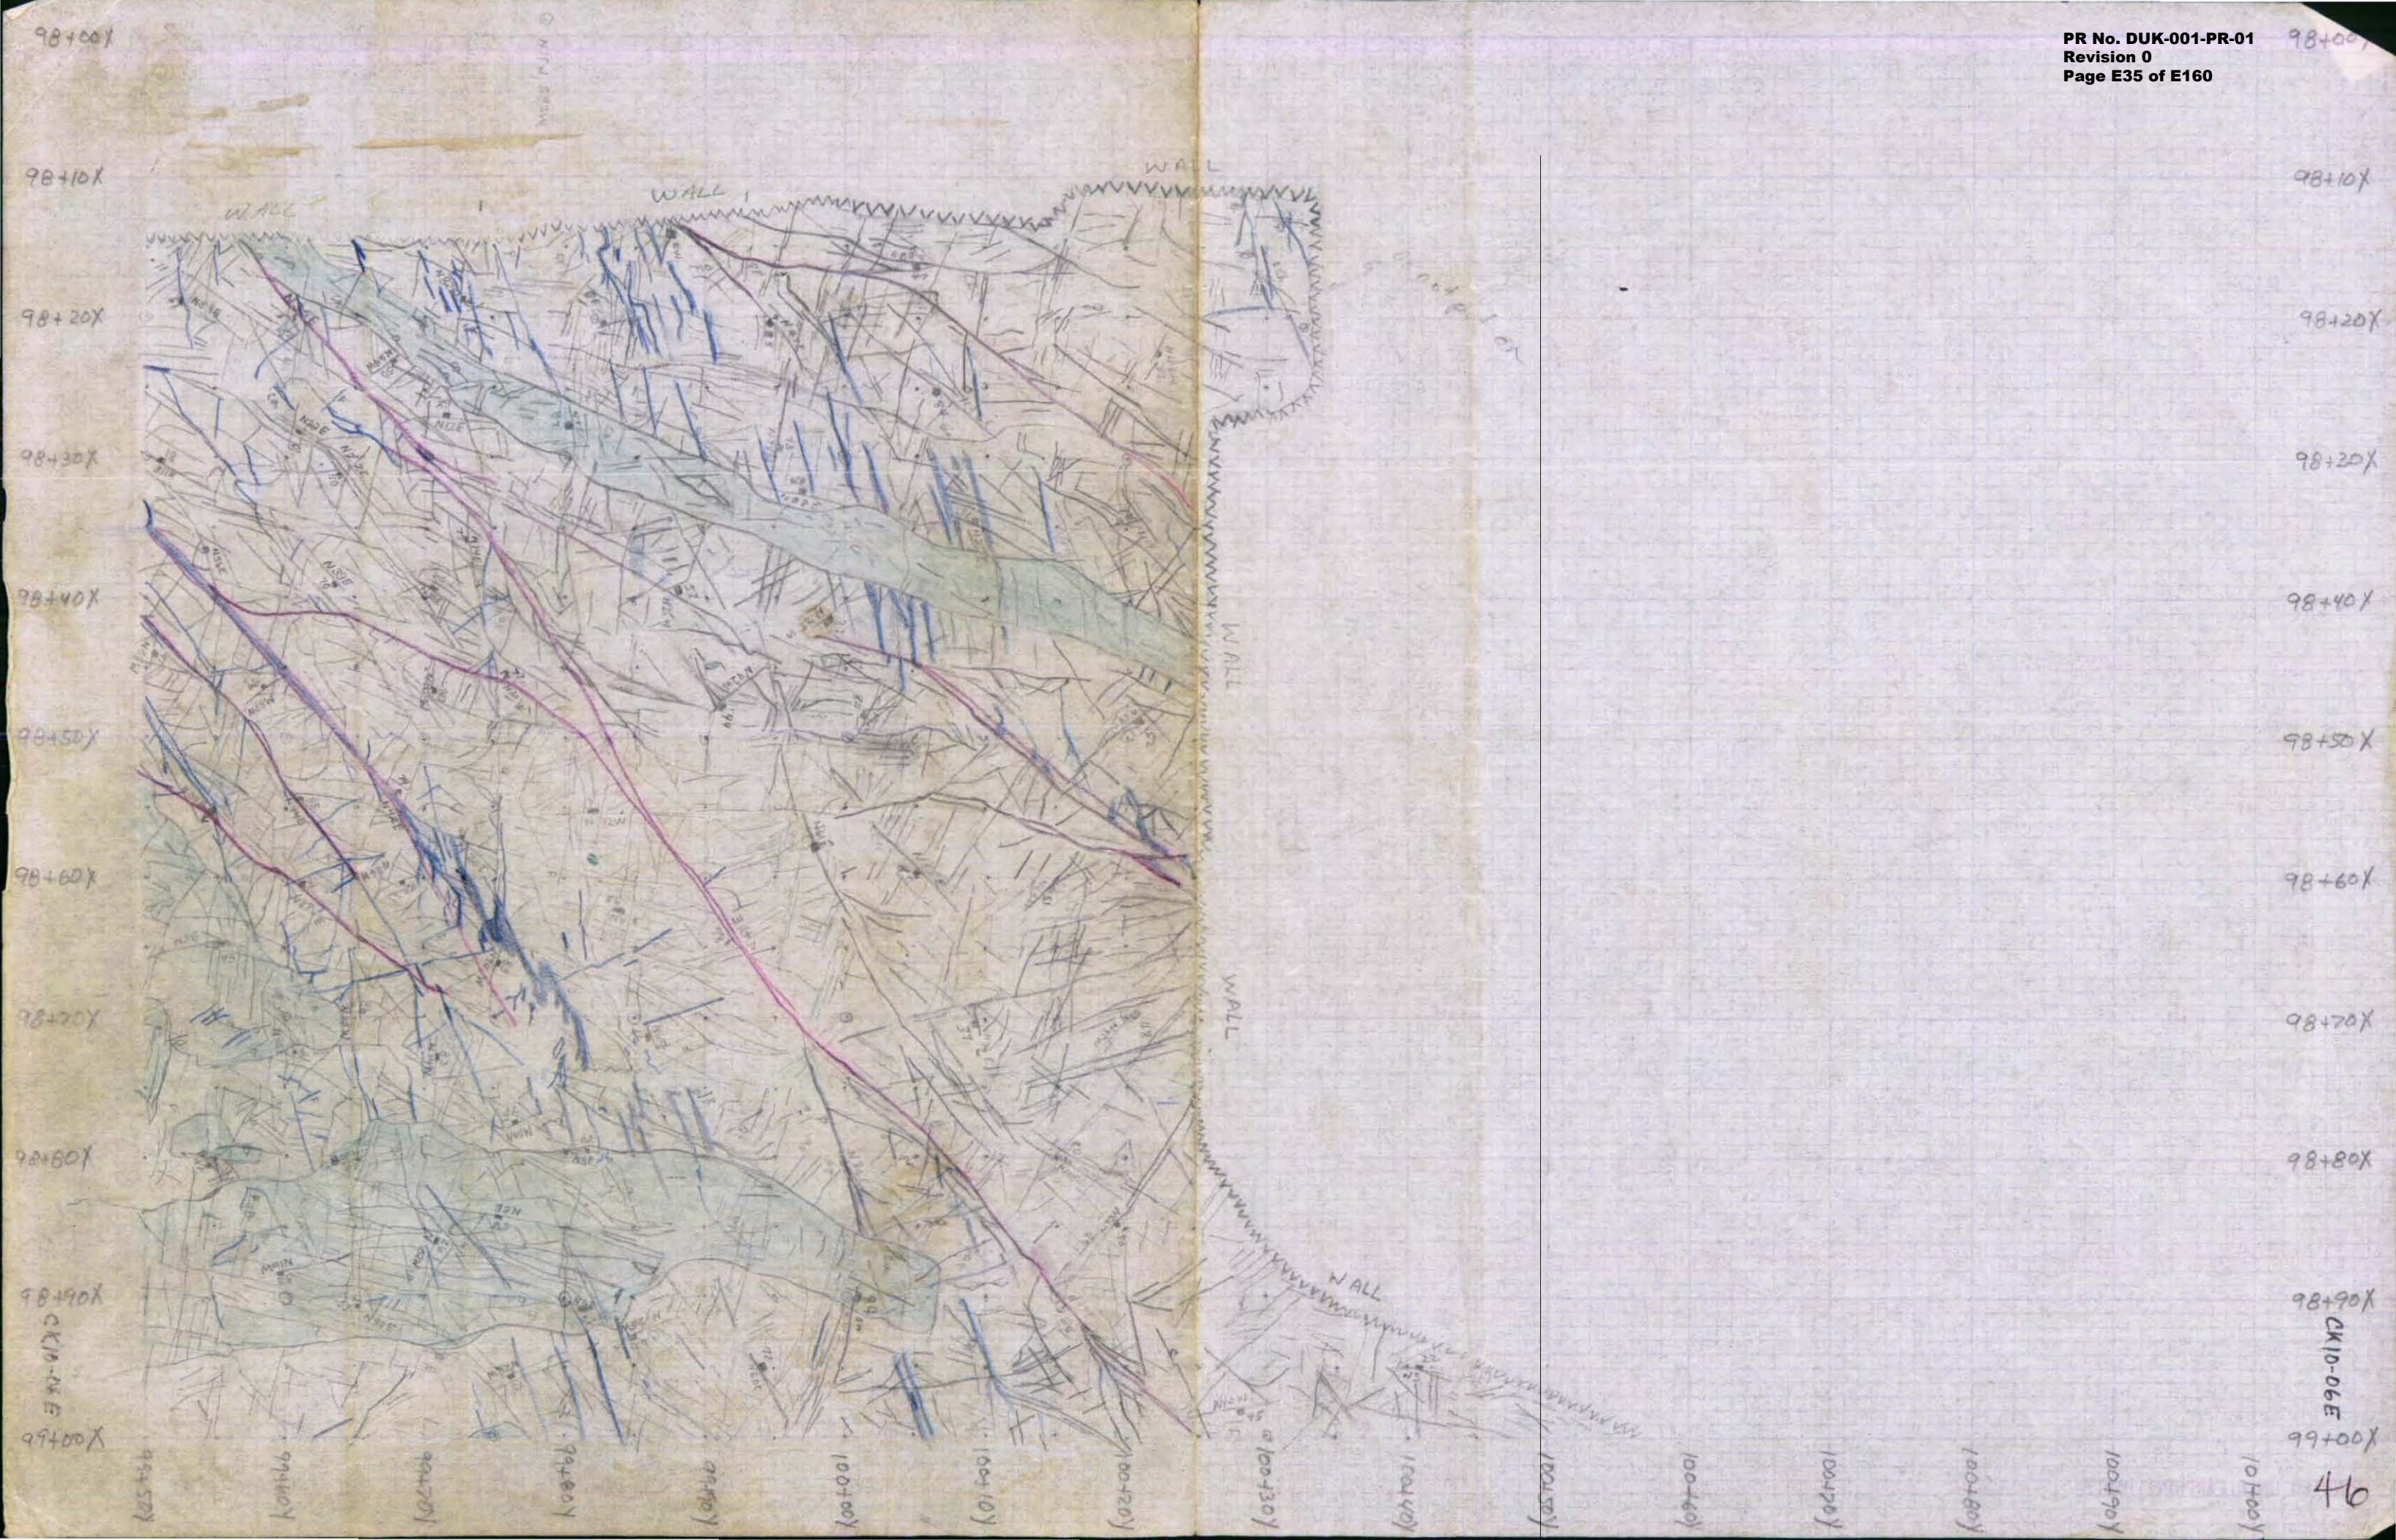

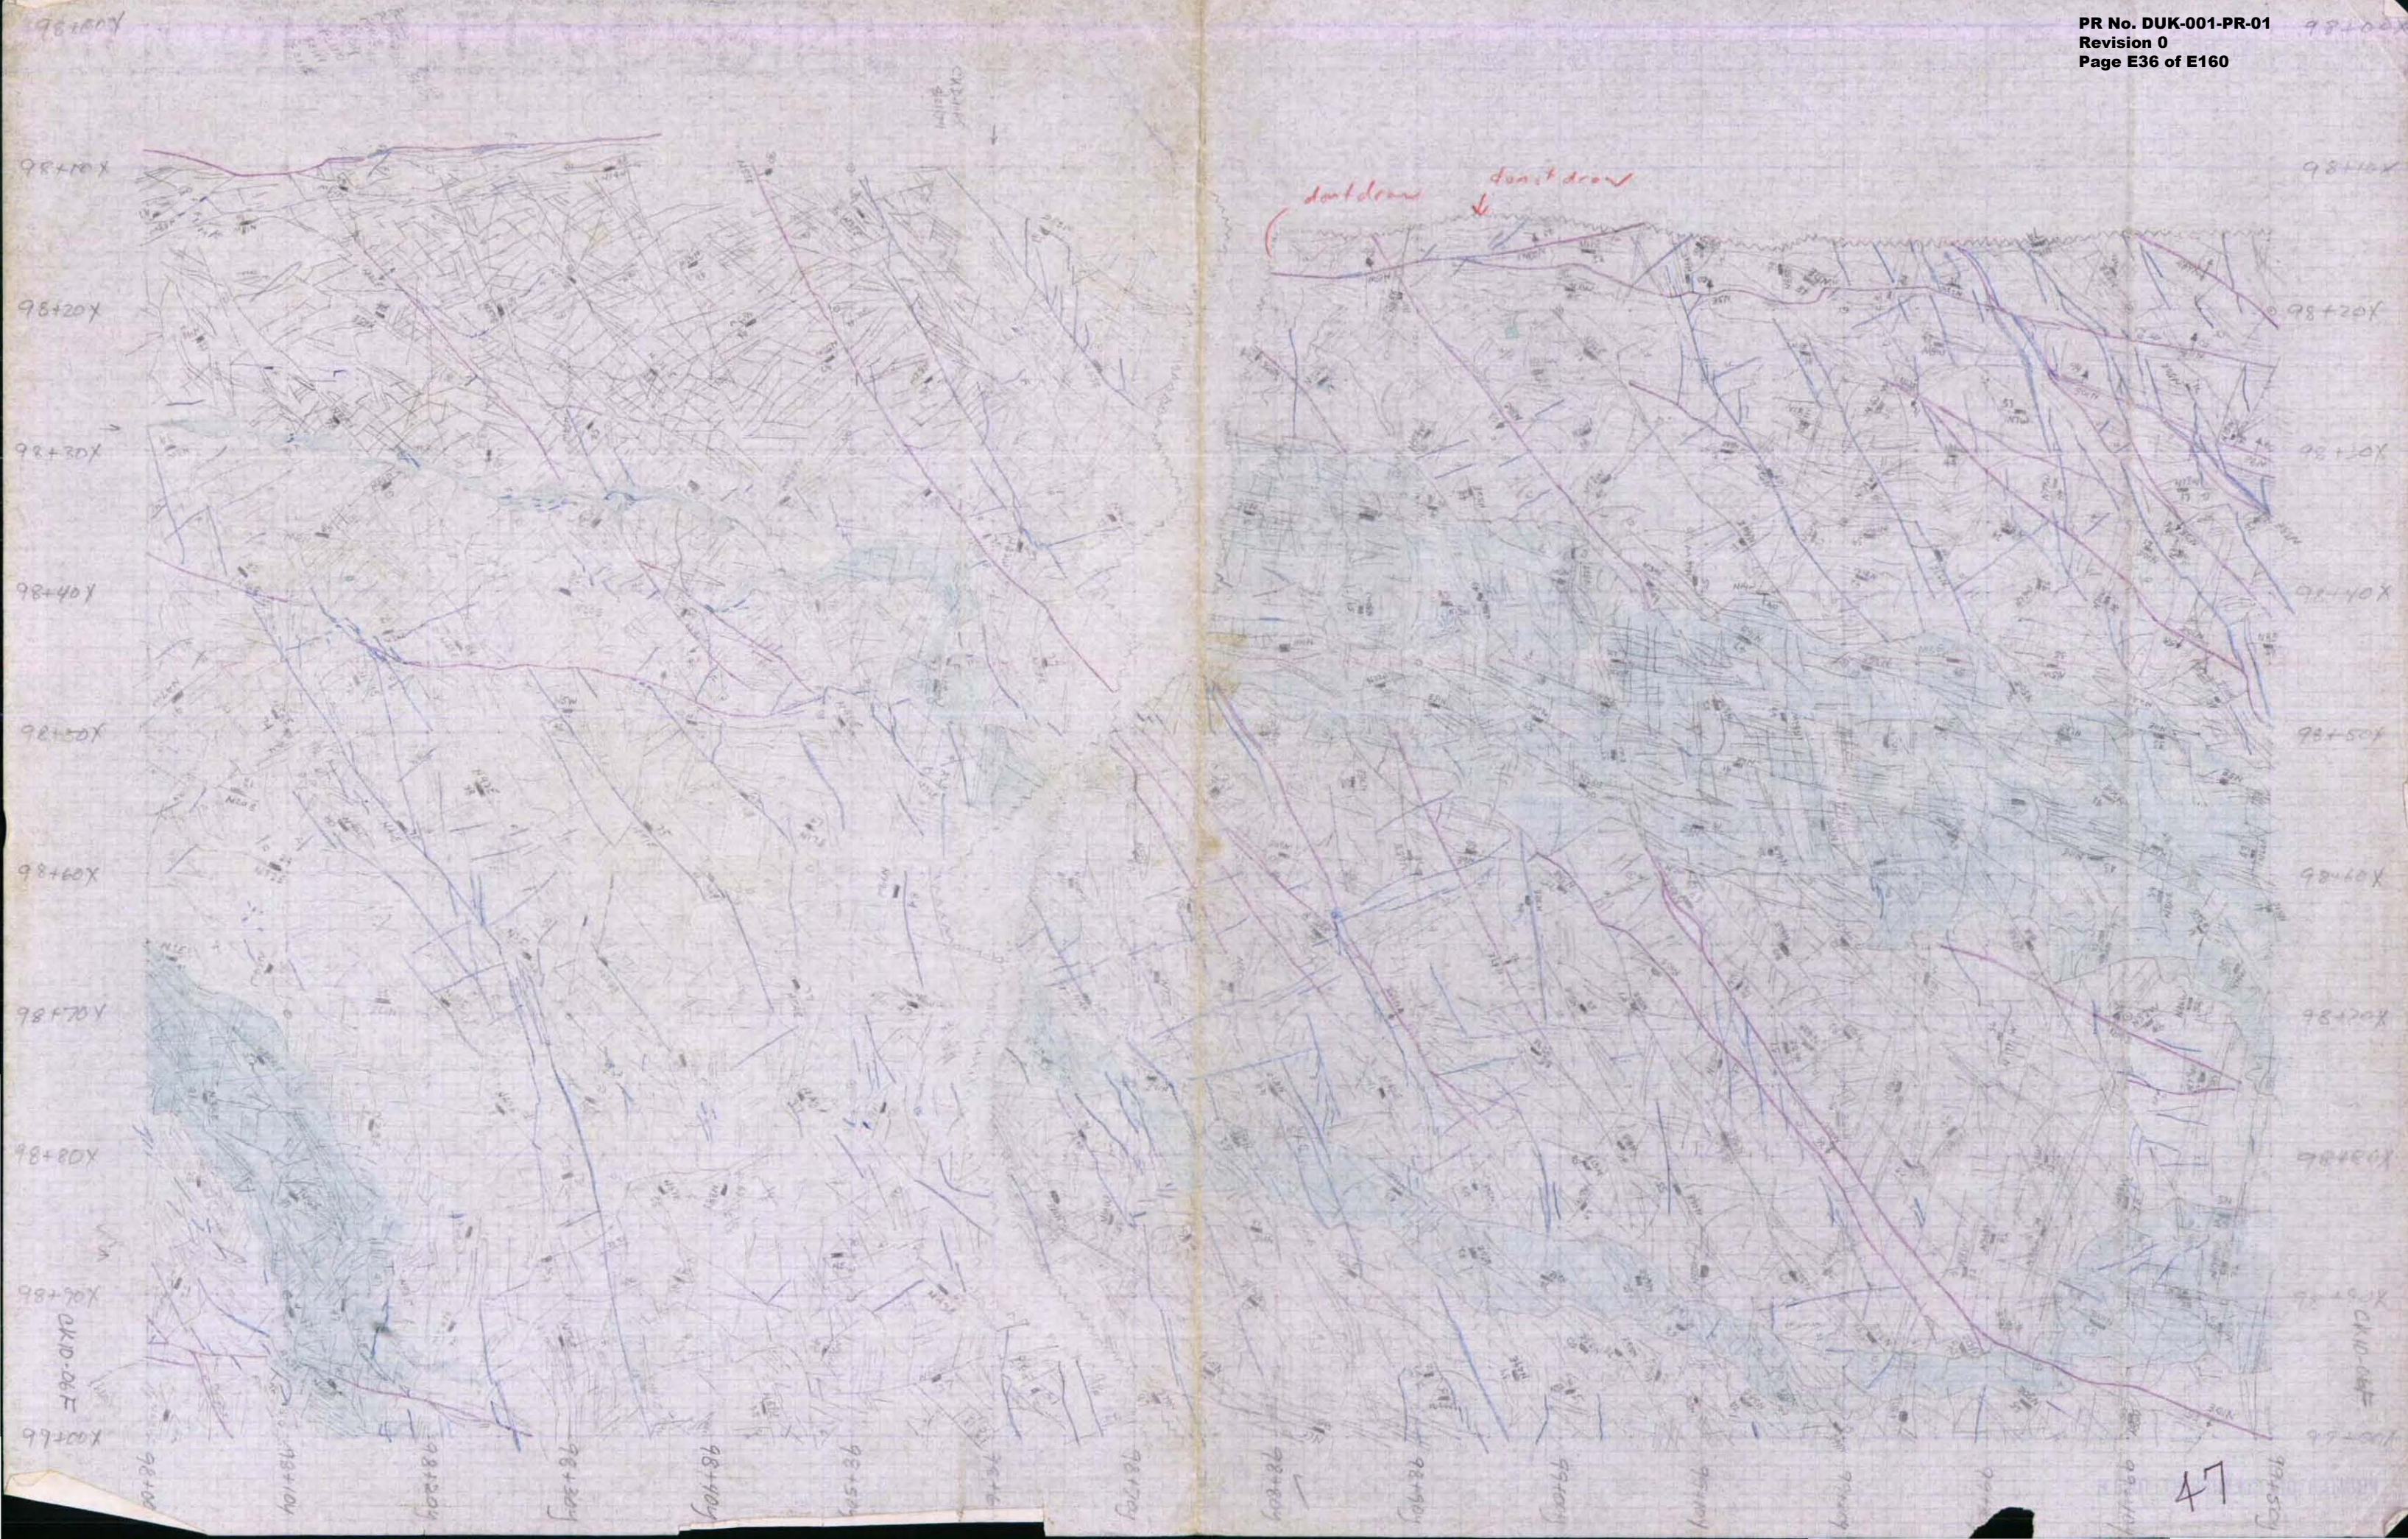


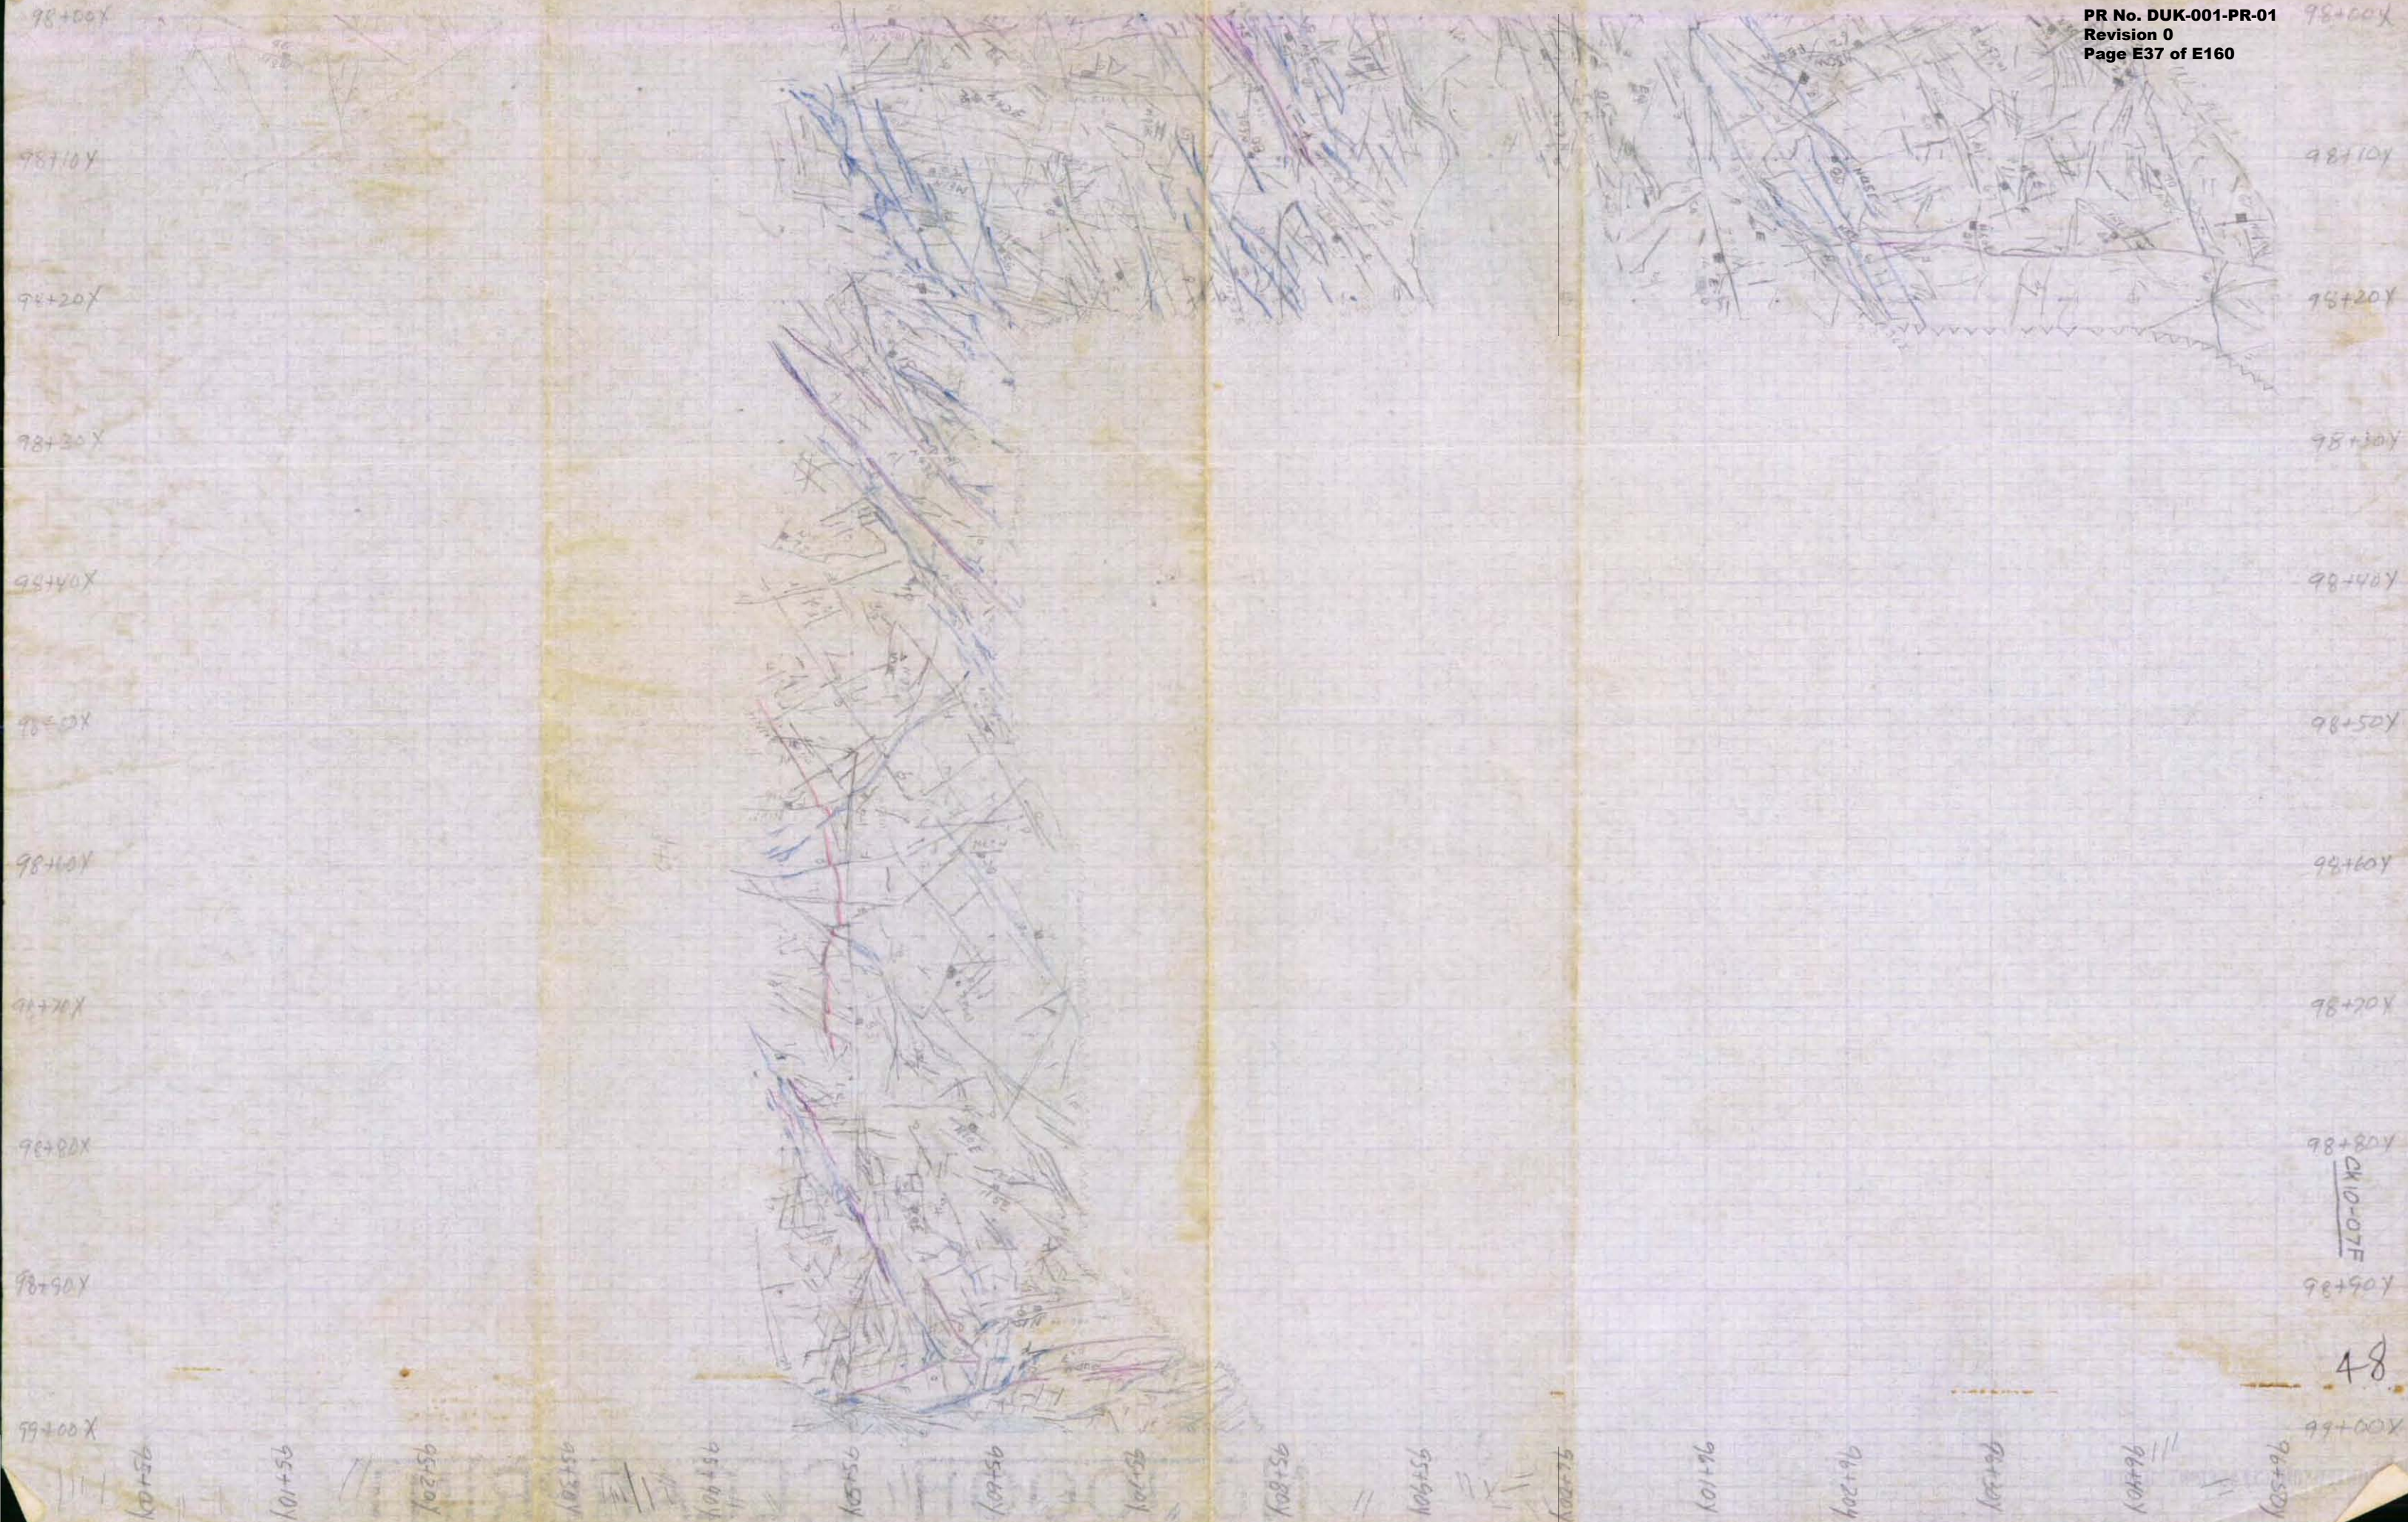

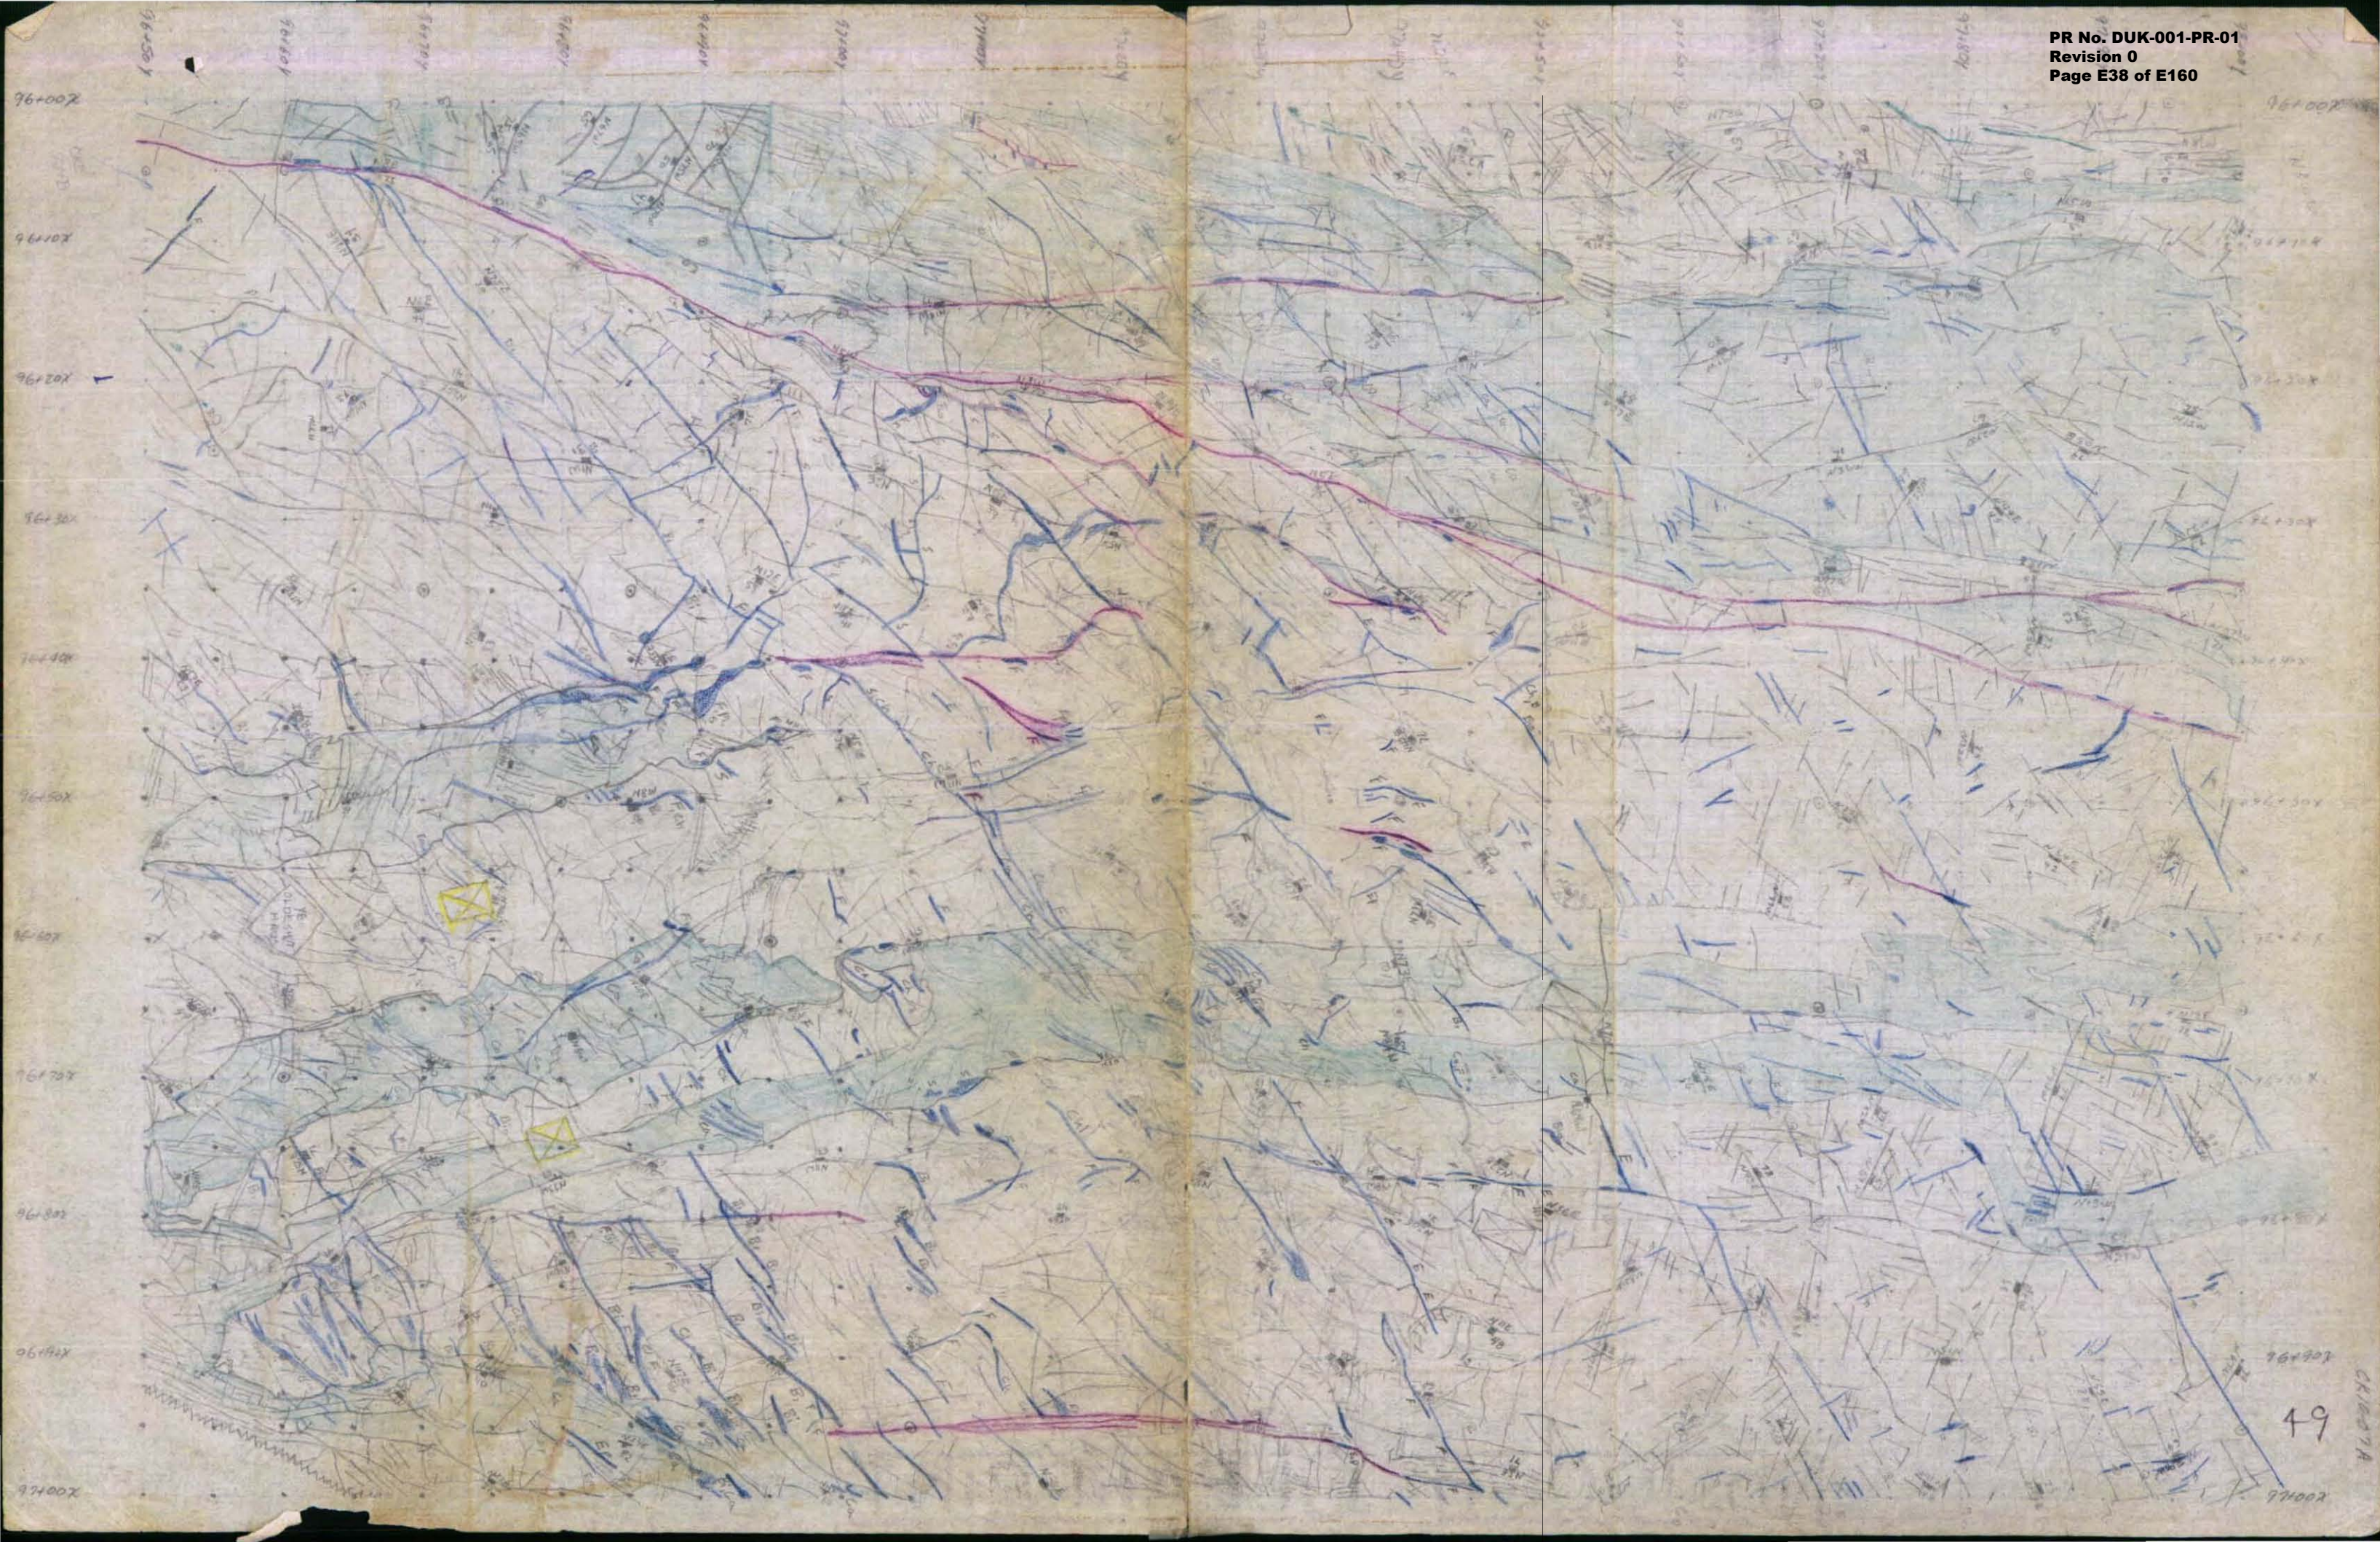

50

98+002

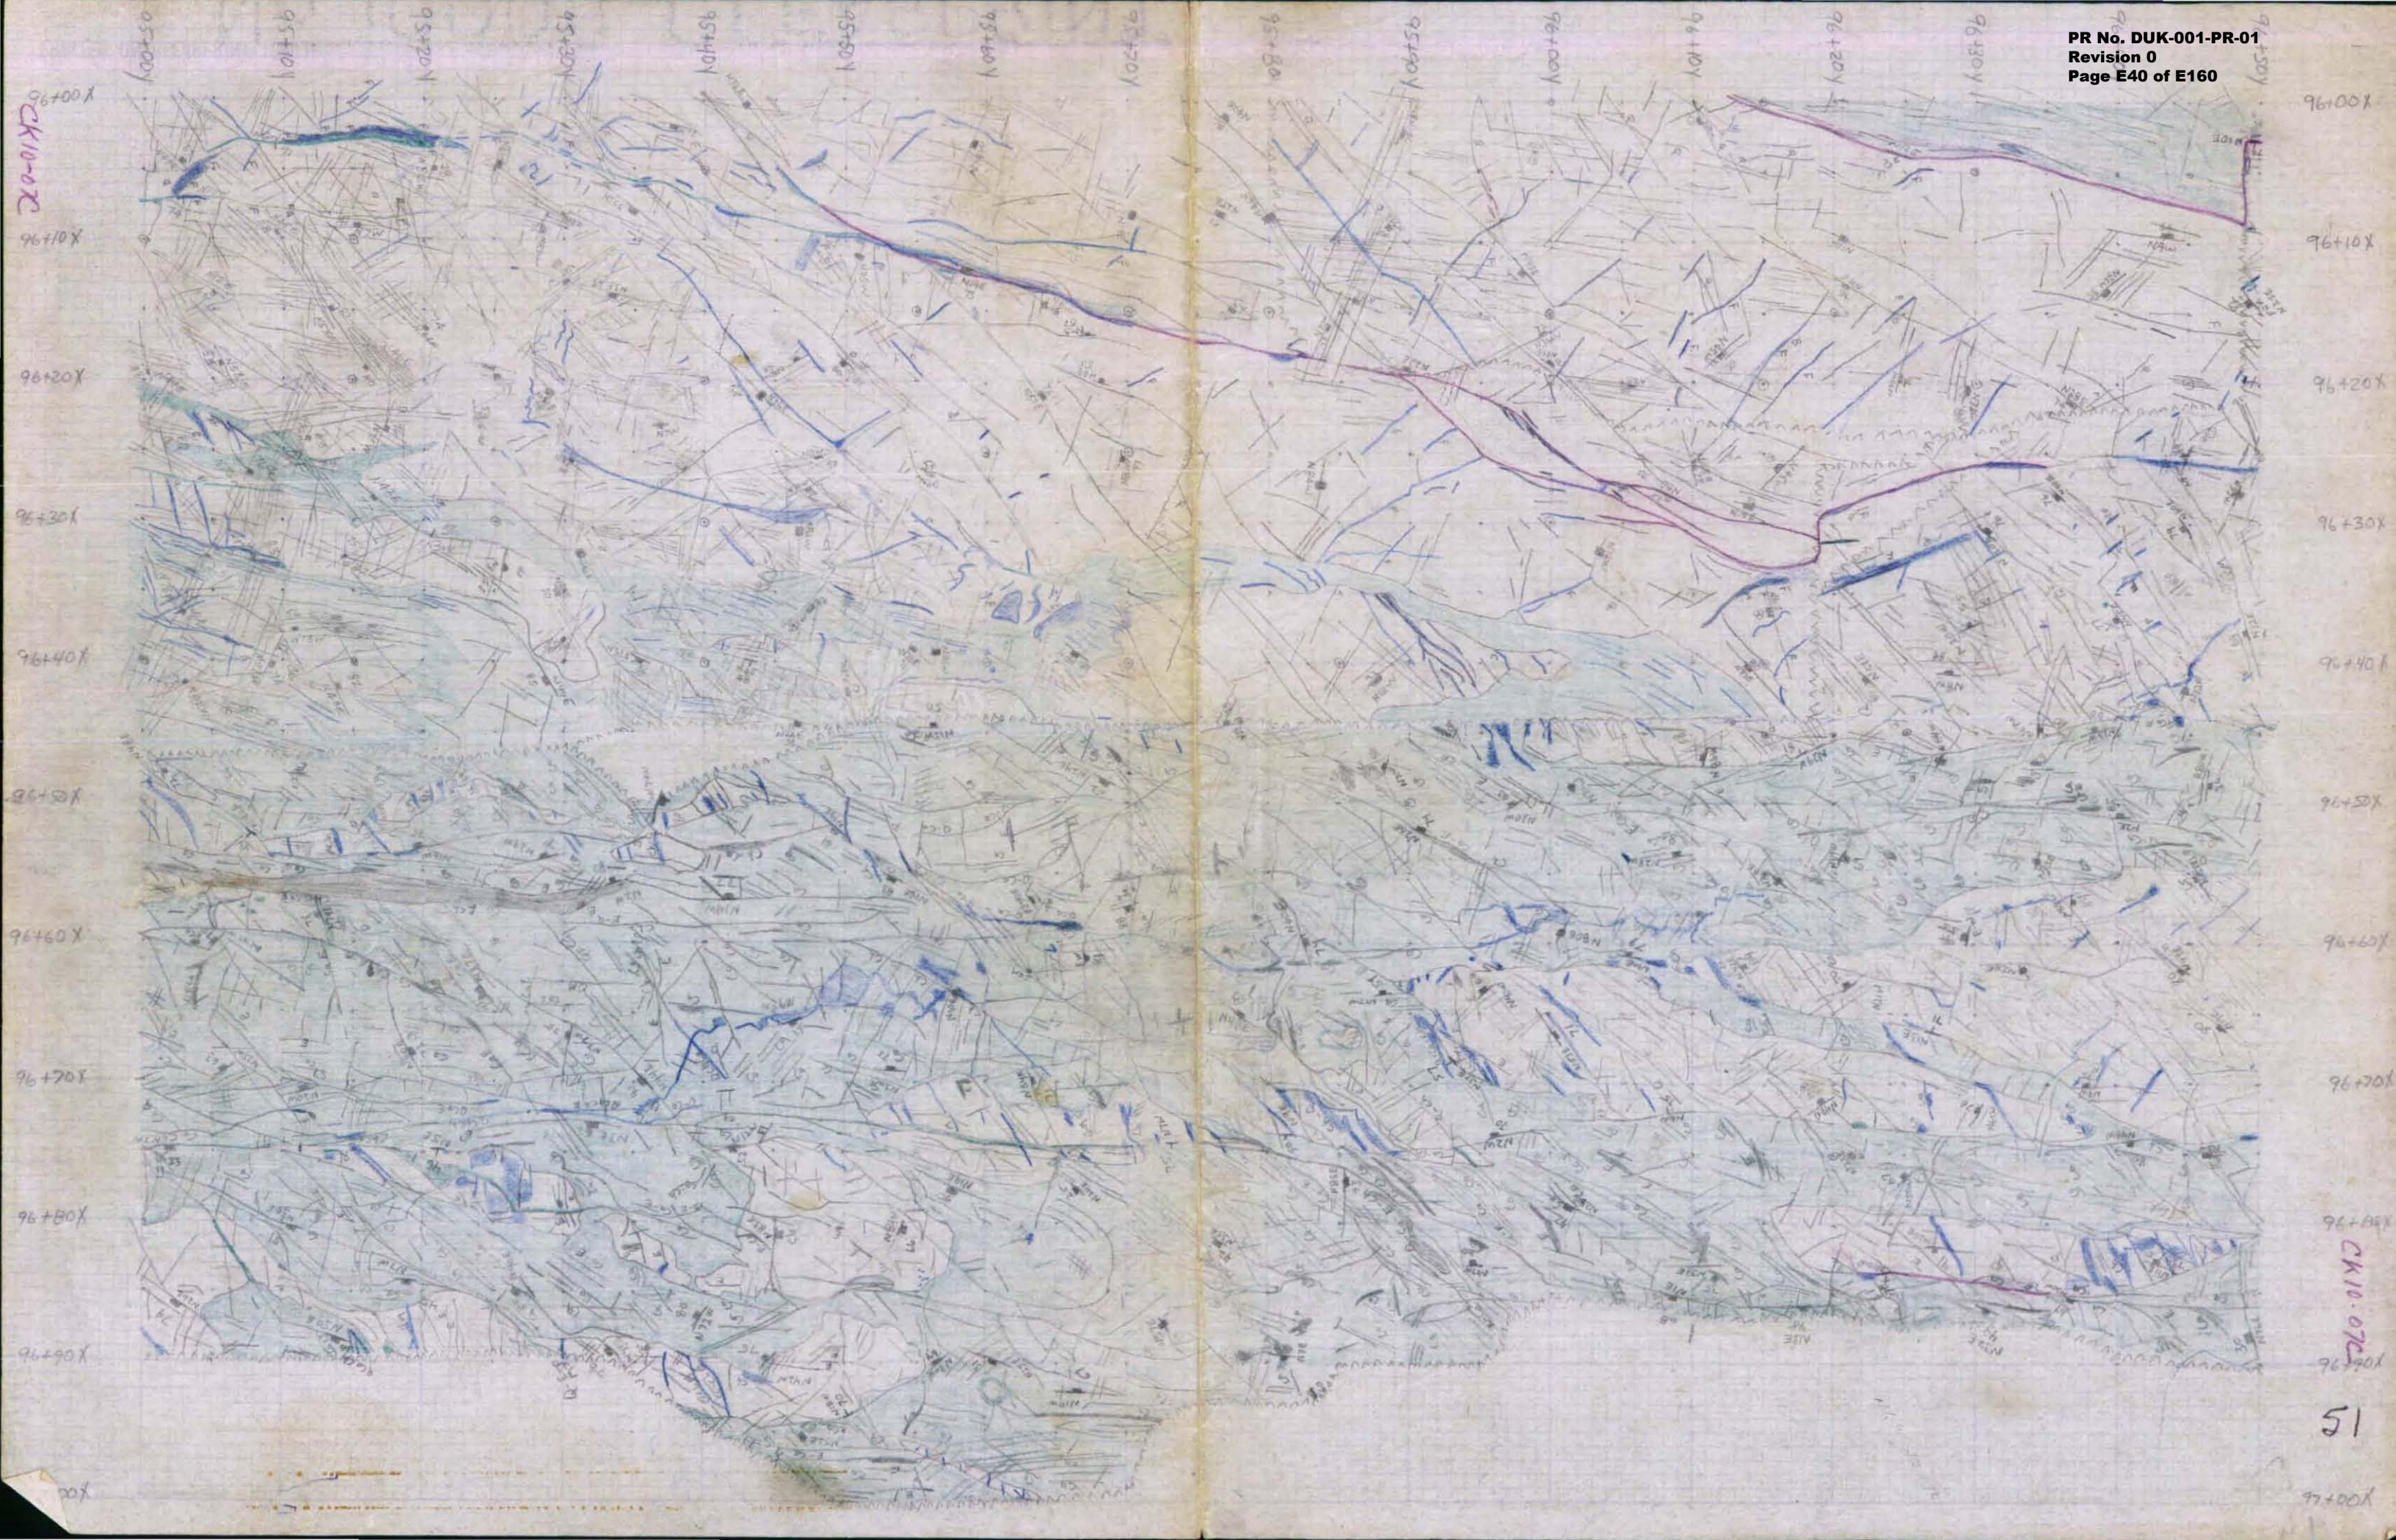

97+00X

97+00X

97+10X

97+10X

97+20X

97+20X

97+30X

97+30X

97+40X

97+40X

97+50X

97+50X

97+60X

97+60X

97+70X

97+70X

97+80X


97+80X

97+90X

97+90X

98+00X


98+00X

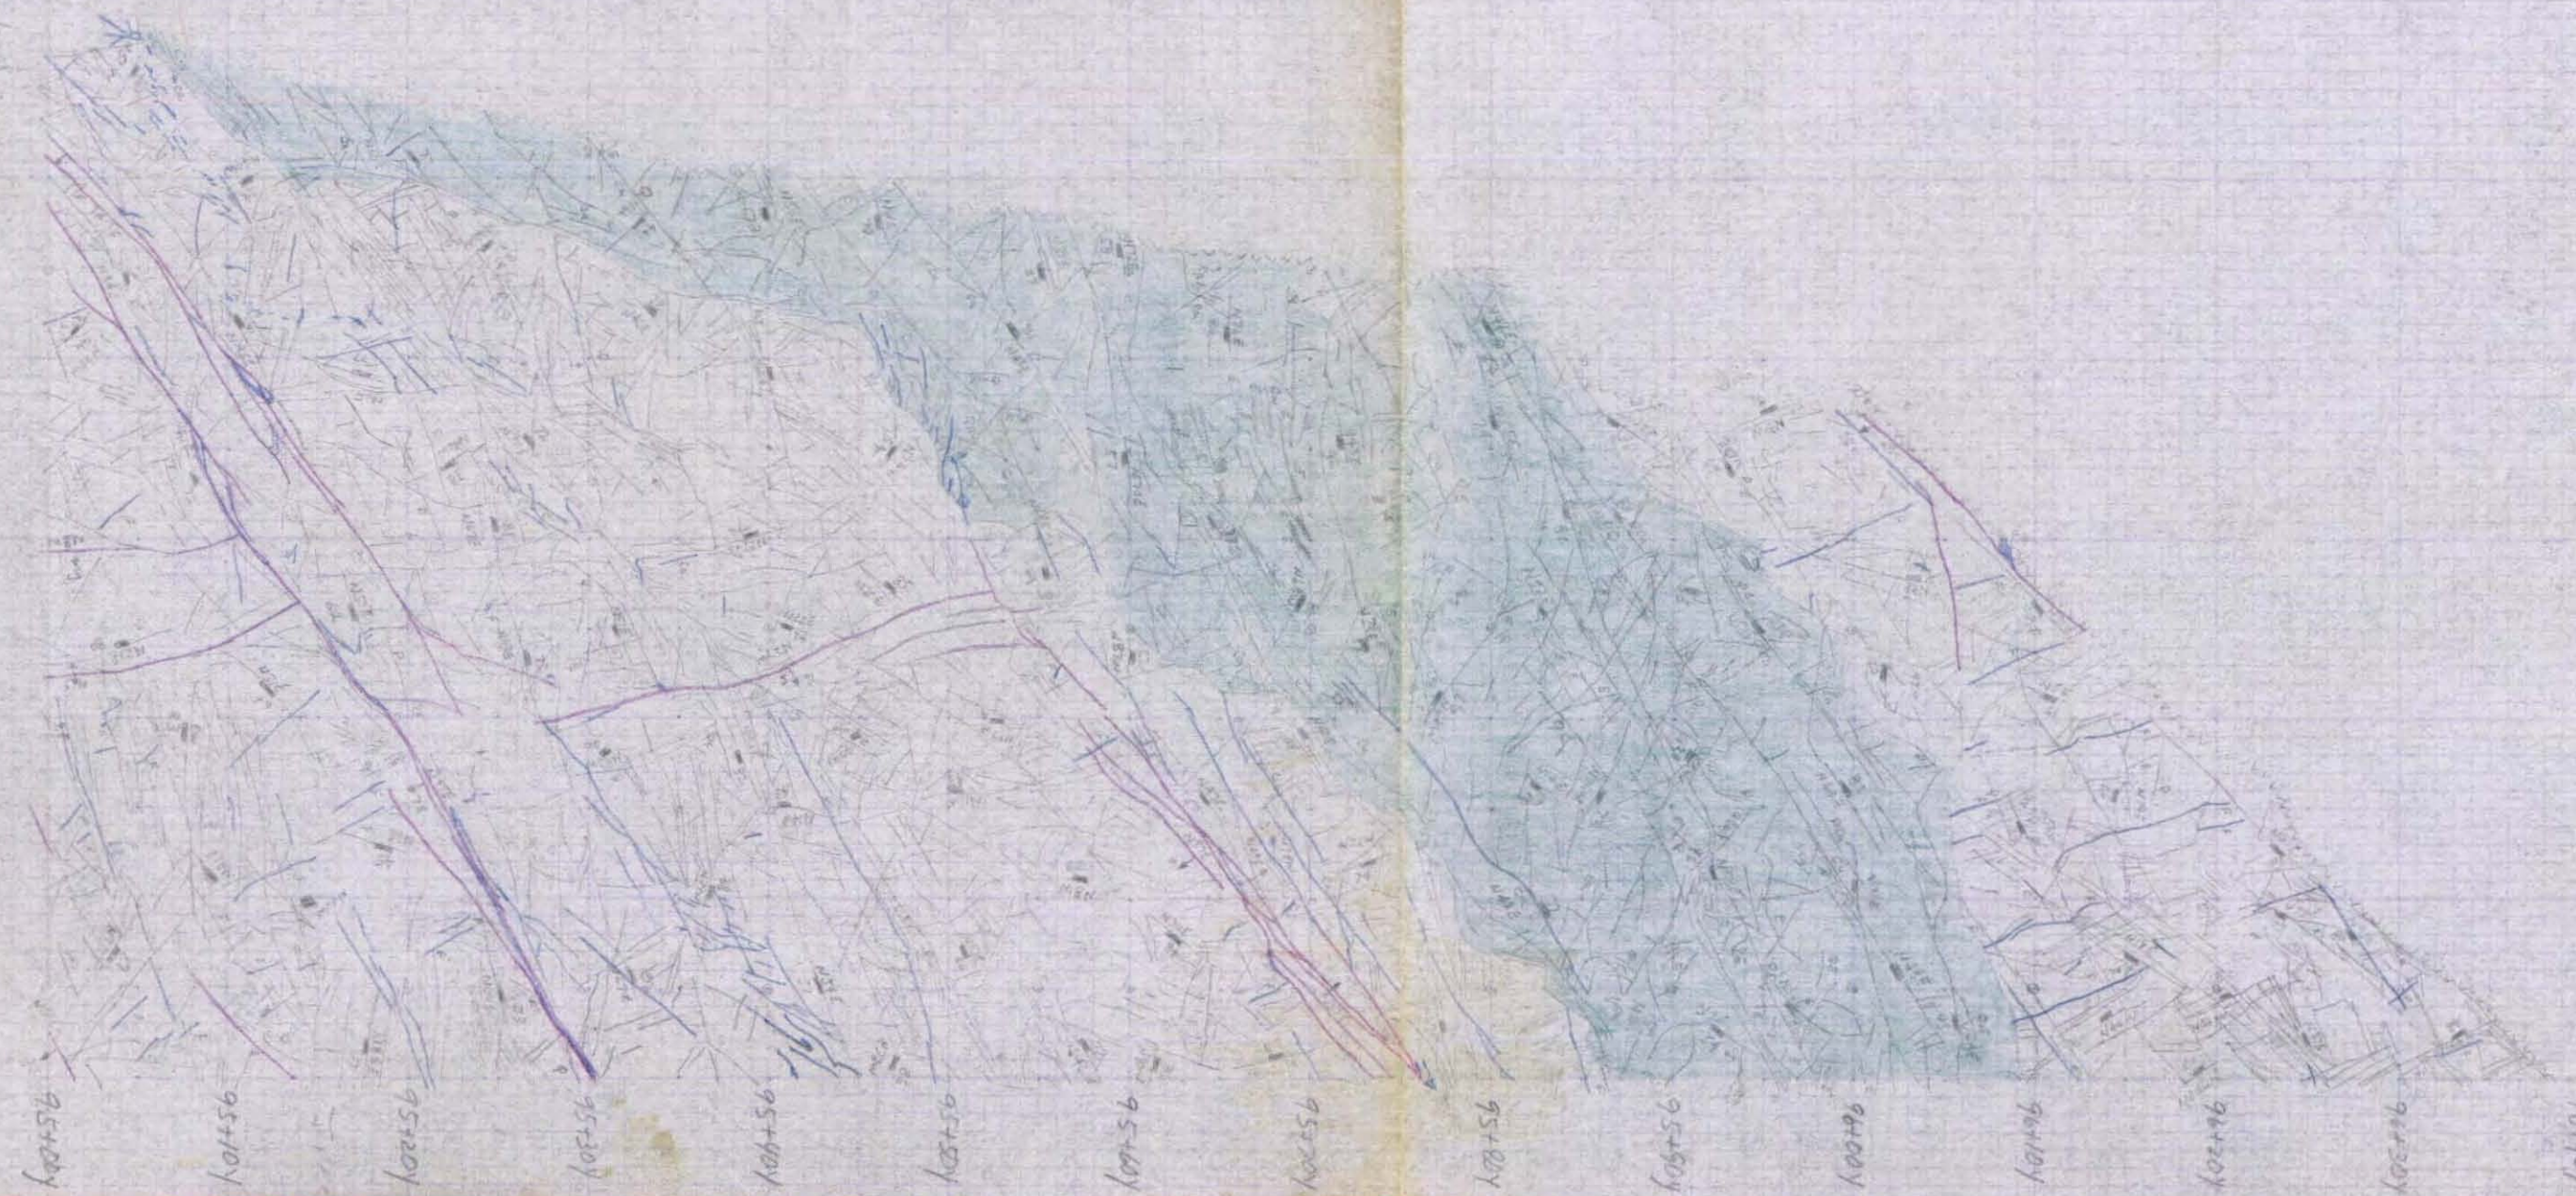

CK10-07D

52

98+50X



98+00X

98+00X

98+10X

98+10X

98+20X

98+20X

98+30X

98+30X

98+40X

98+40X

98+50X

98+50X

98+60X

98+60X

98+70X

98+70X

98+80X


98+80X

98+90X

98+90X

99+00X

99+00X

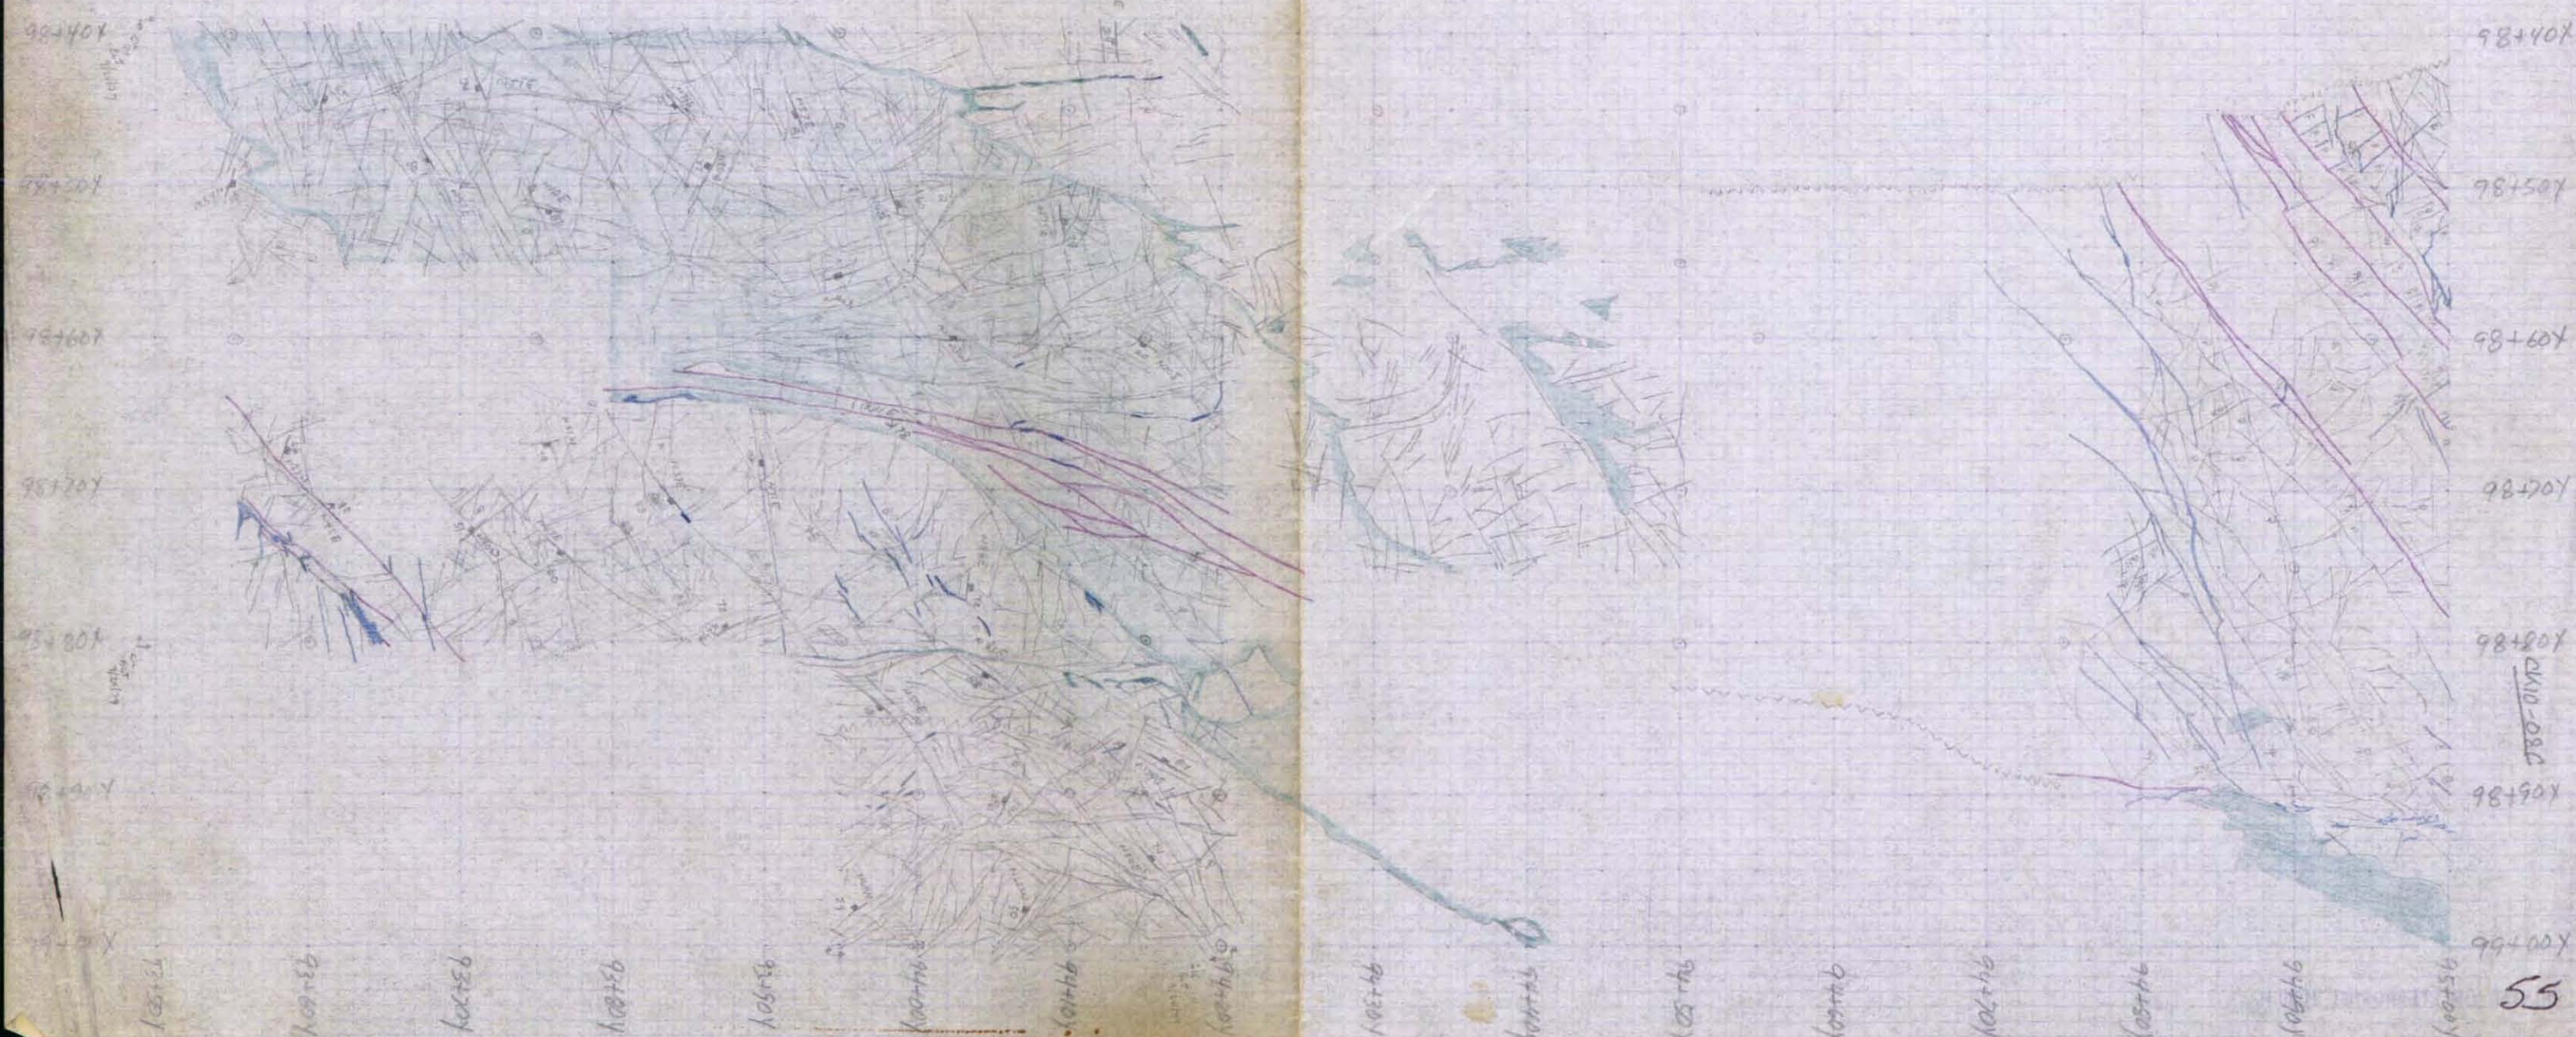



97+00X

97+10X

97+20X

97+30X

97+40X

97+50X

97+60X

97+70X

97+80X

97+90X

98+00X

57



97+00X

97+10X

97+20X

97+30X

97+40X

97+50X

97+60X

97+70X

97+80X

97+90X

98+00X

93+50X

93+60X

93+70X

93+80X

93+90X

94+00X

94+10X

94+20X

94+30X

94+40X

94+50X

94+60X

94+70X

94+80X

94+90X

95+00X

96+00X

96+10X

96+20X

96+30X

96+40X

96+50X


96+60X

96+70X

96+80X

96+90X

97+00X

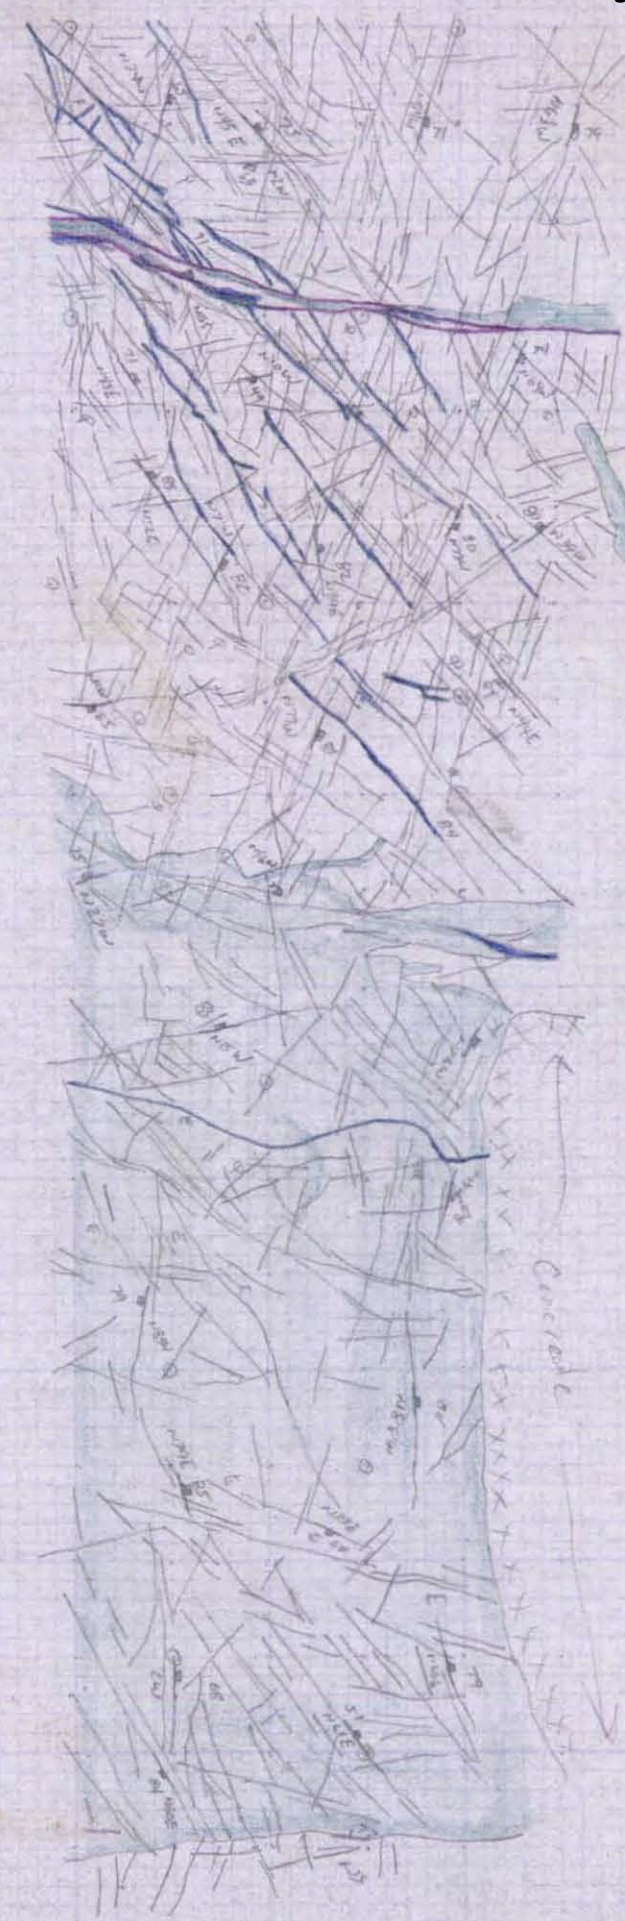

96+00X

96+10X

96+20X

96+30X

96+40X

96+50X

96+60X

96+70X

96+80X

96+90X

97+00X

OKD-08A

58



99+00X

99+10X

99+20X

99+30X

99+40X

99+50X

99+60X

99+70X

99+80X

99+90X

60
CK10-09A

100+00X

102+50X

102+40X

102+30X

102+20X

102+10X

102+00X

101+90X

101+80X

101+70X

101+60X

101+50X

101+40X

101+30X

101+20X

101+10X

101+00X

100+00X

CK10-09A

99+90X

99+80X

99+70X

99+60X

99+50X


99+40X

99+30X


99+20X


99+10X

99+00X

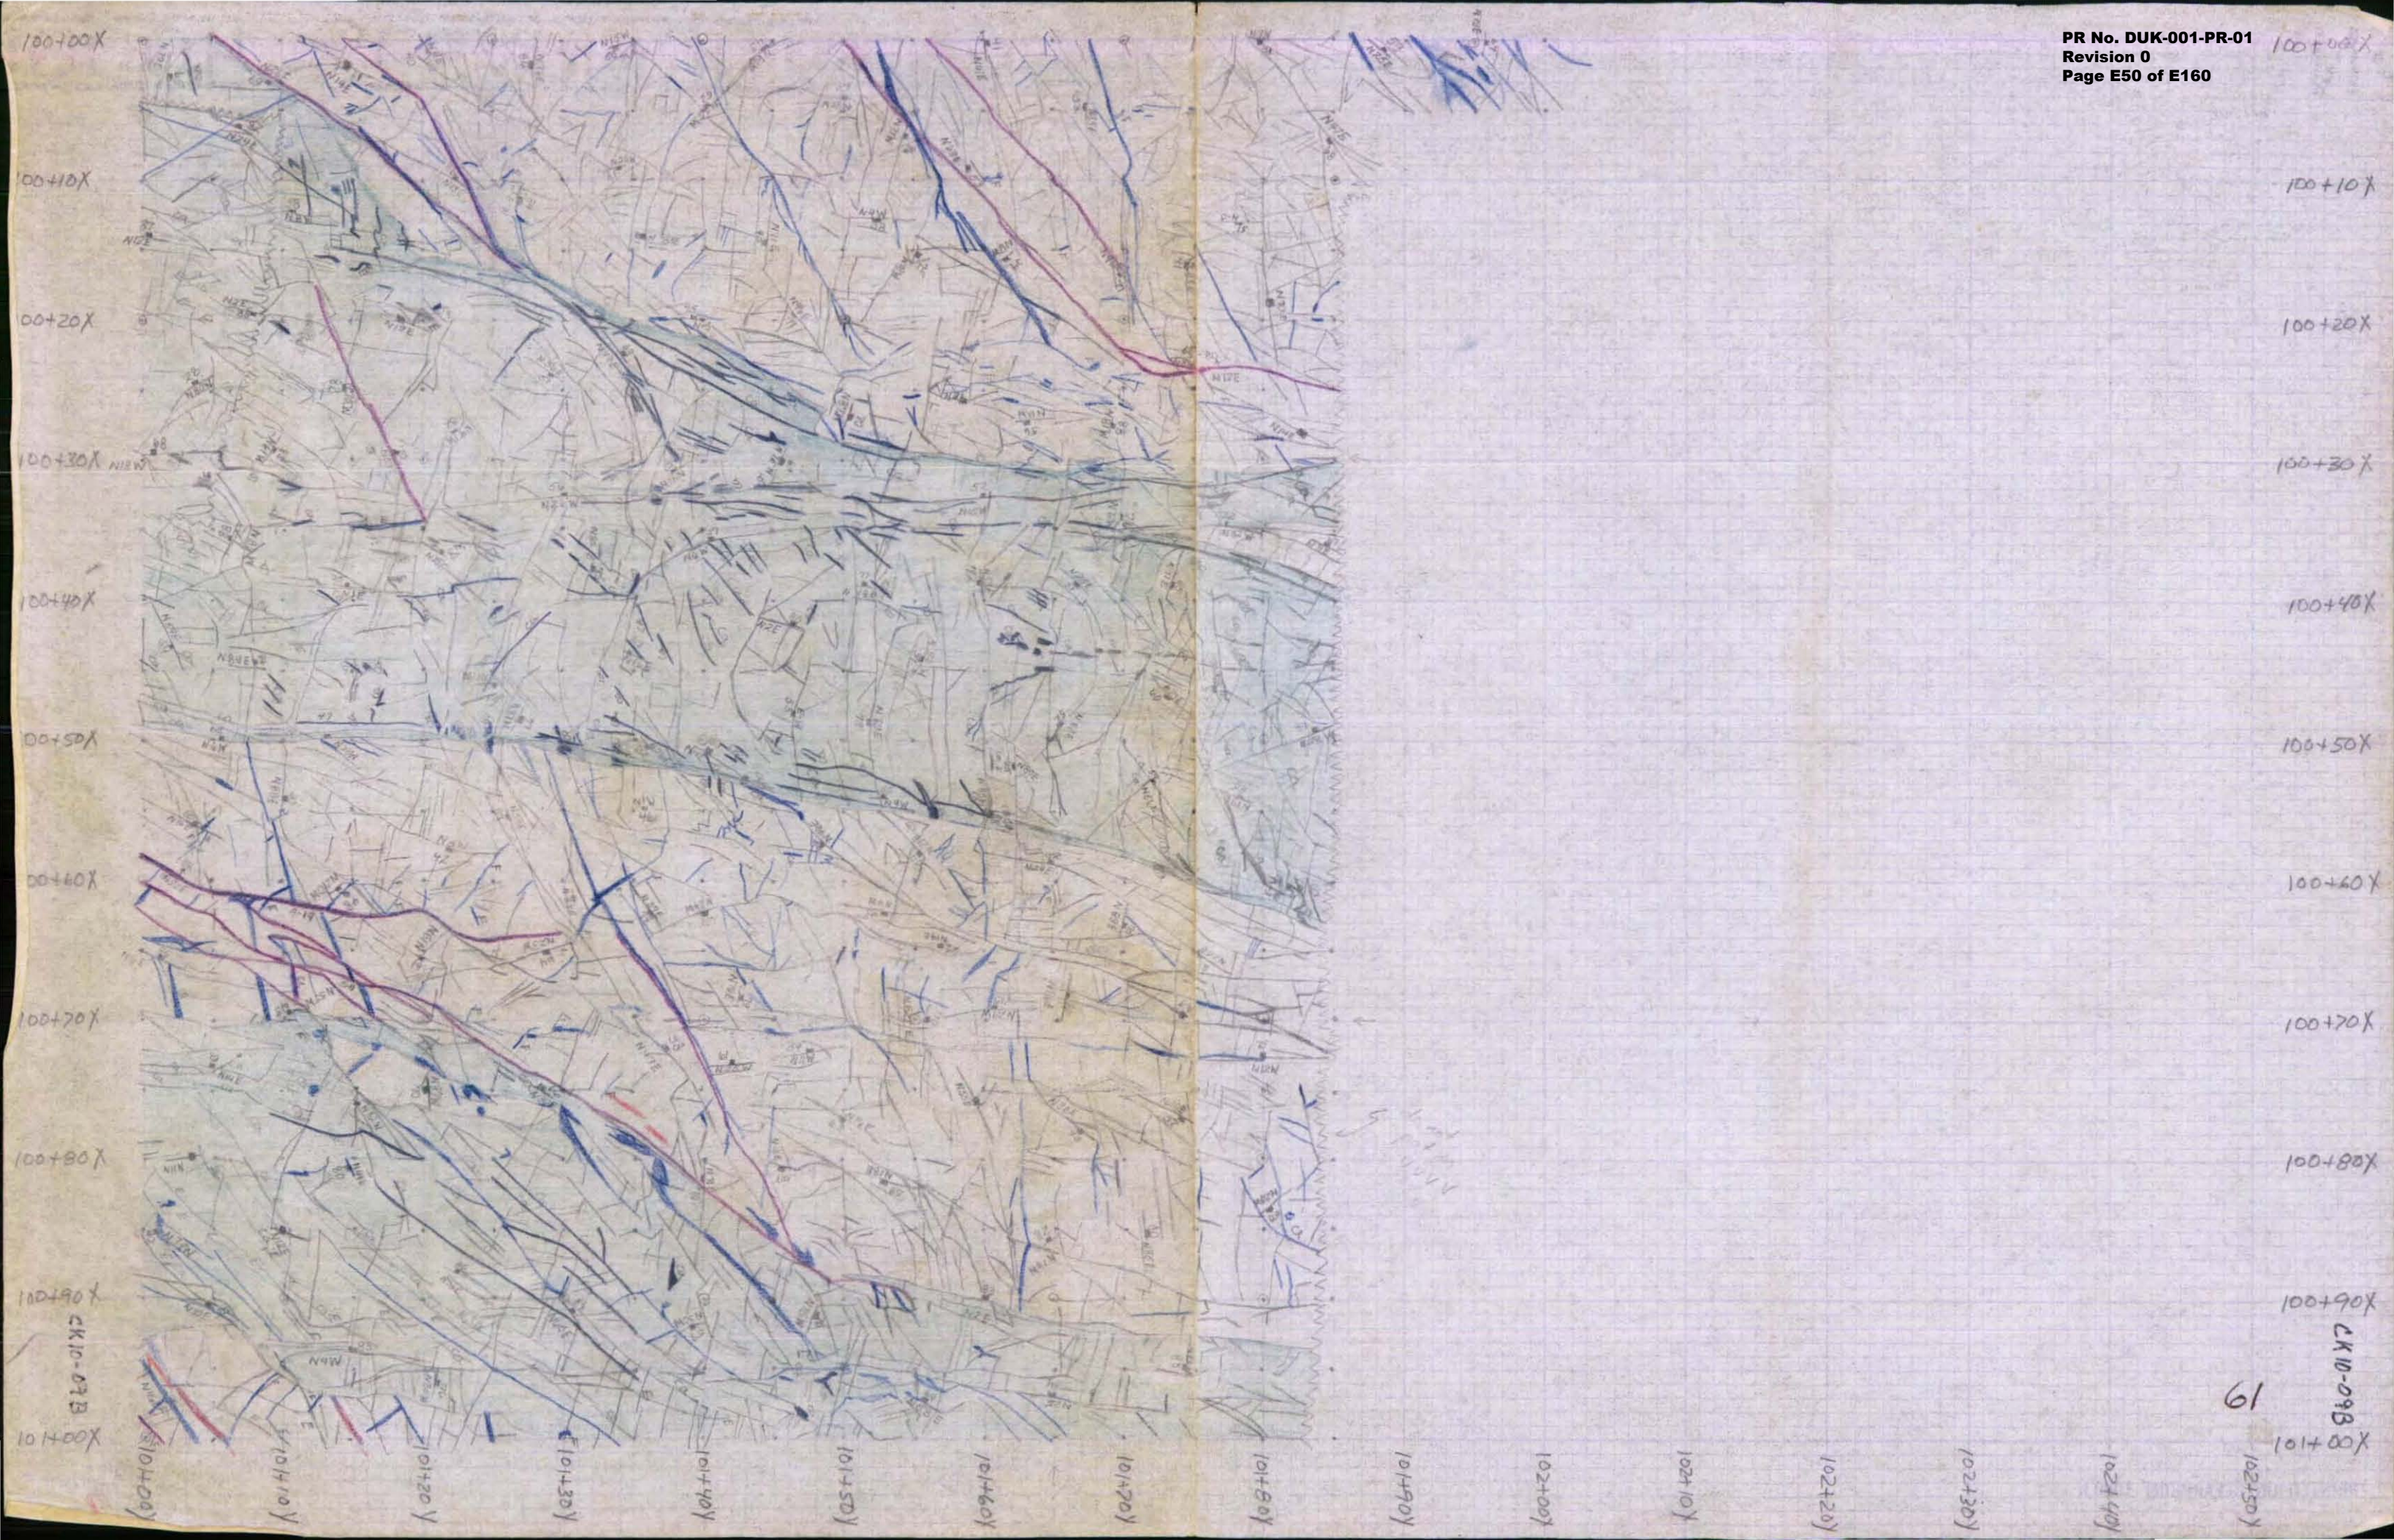



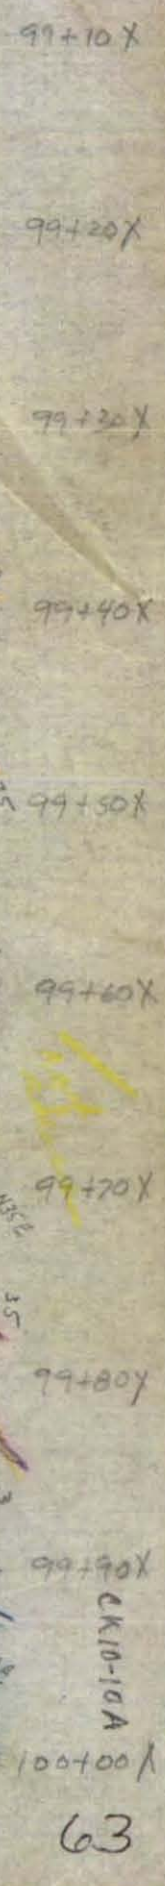

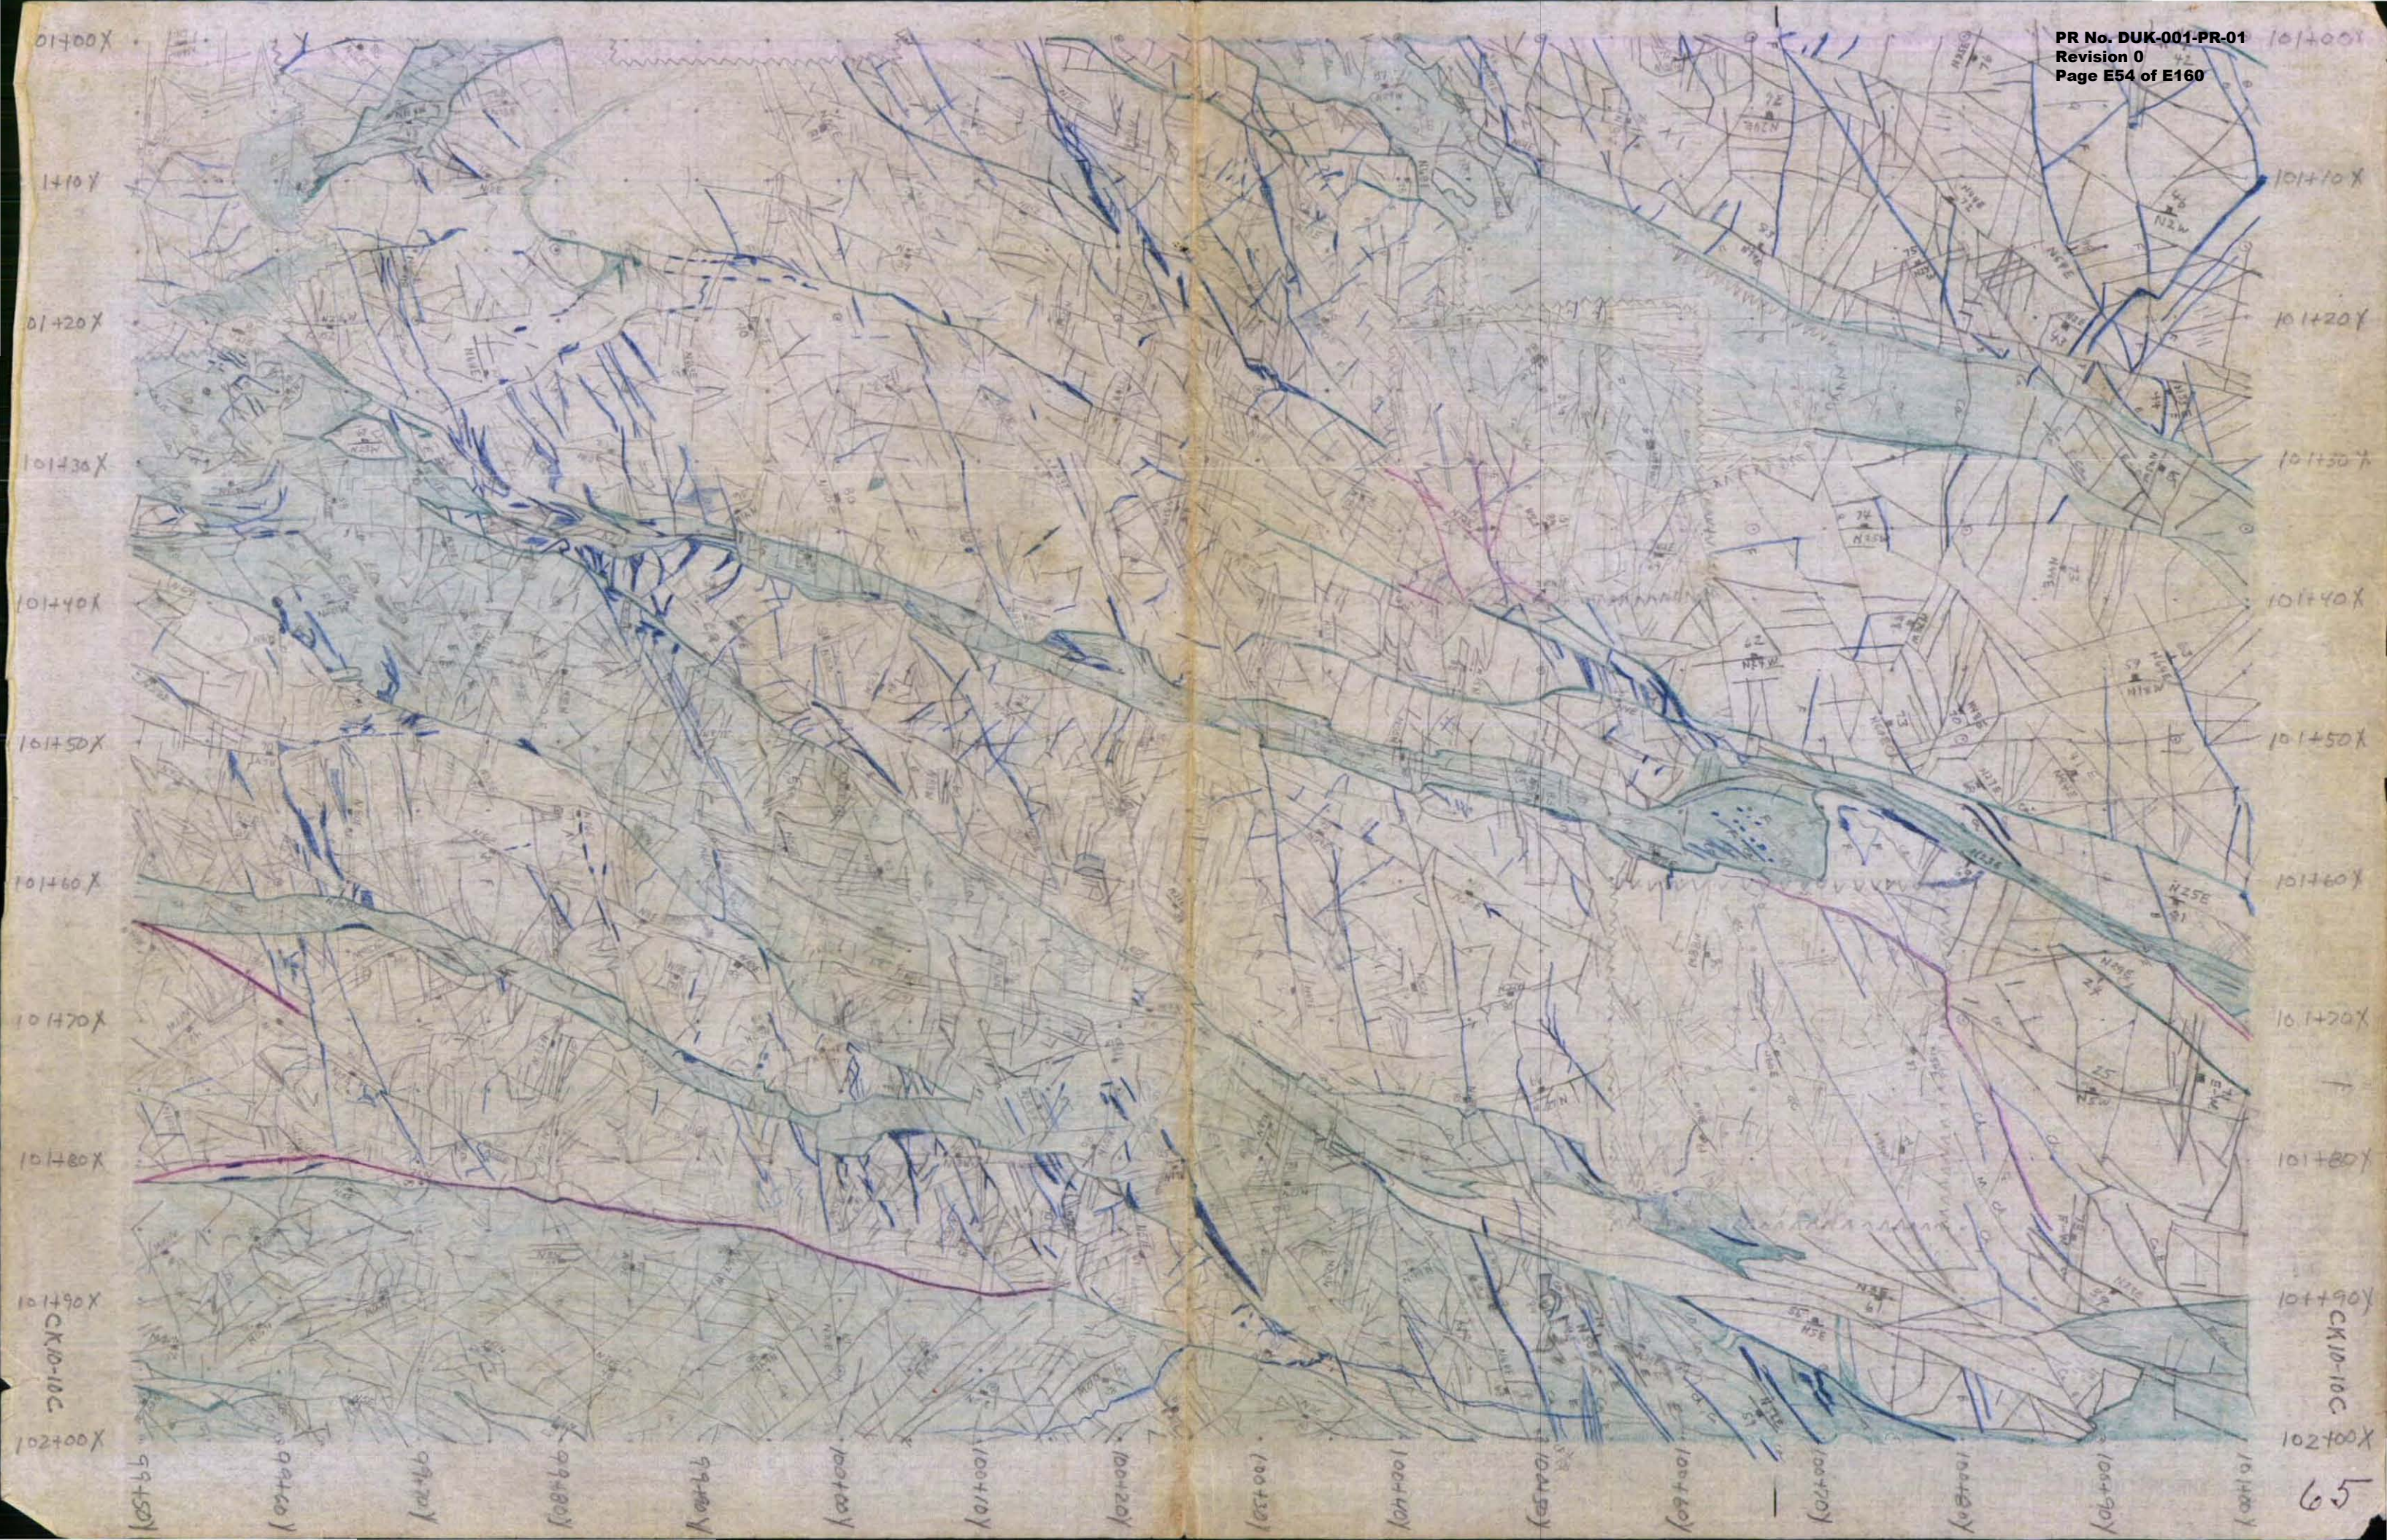

101410X

10/420X

101430X

101440X

1014-50 X

10460 Y

101430Y

1014241

101.0-10

11

98+004

784104

502+86

98 + 304

507+36

984504

984604

984704

08 + 524

28180

2766


100

3



102

66






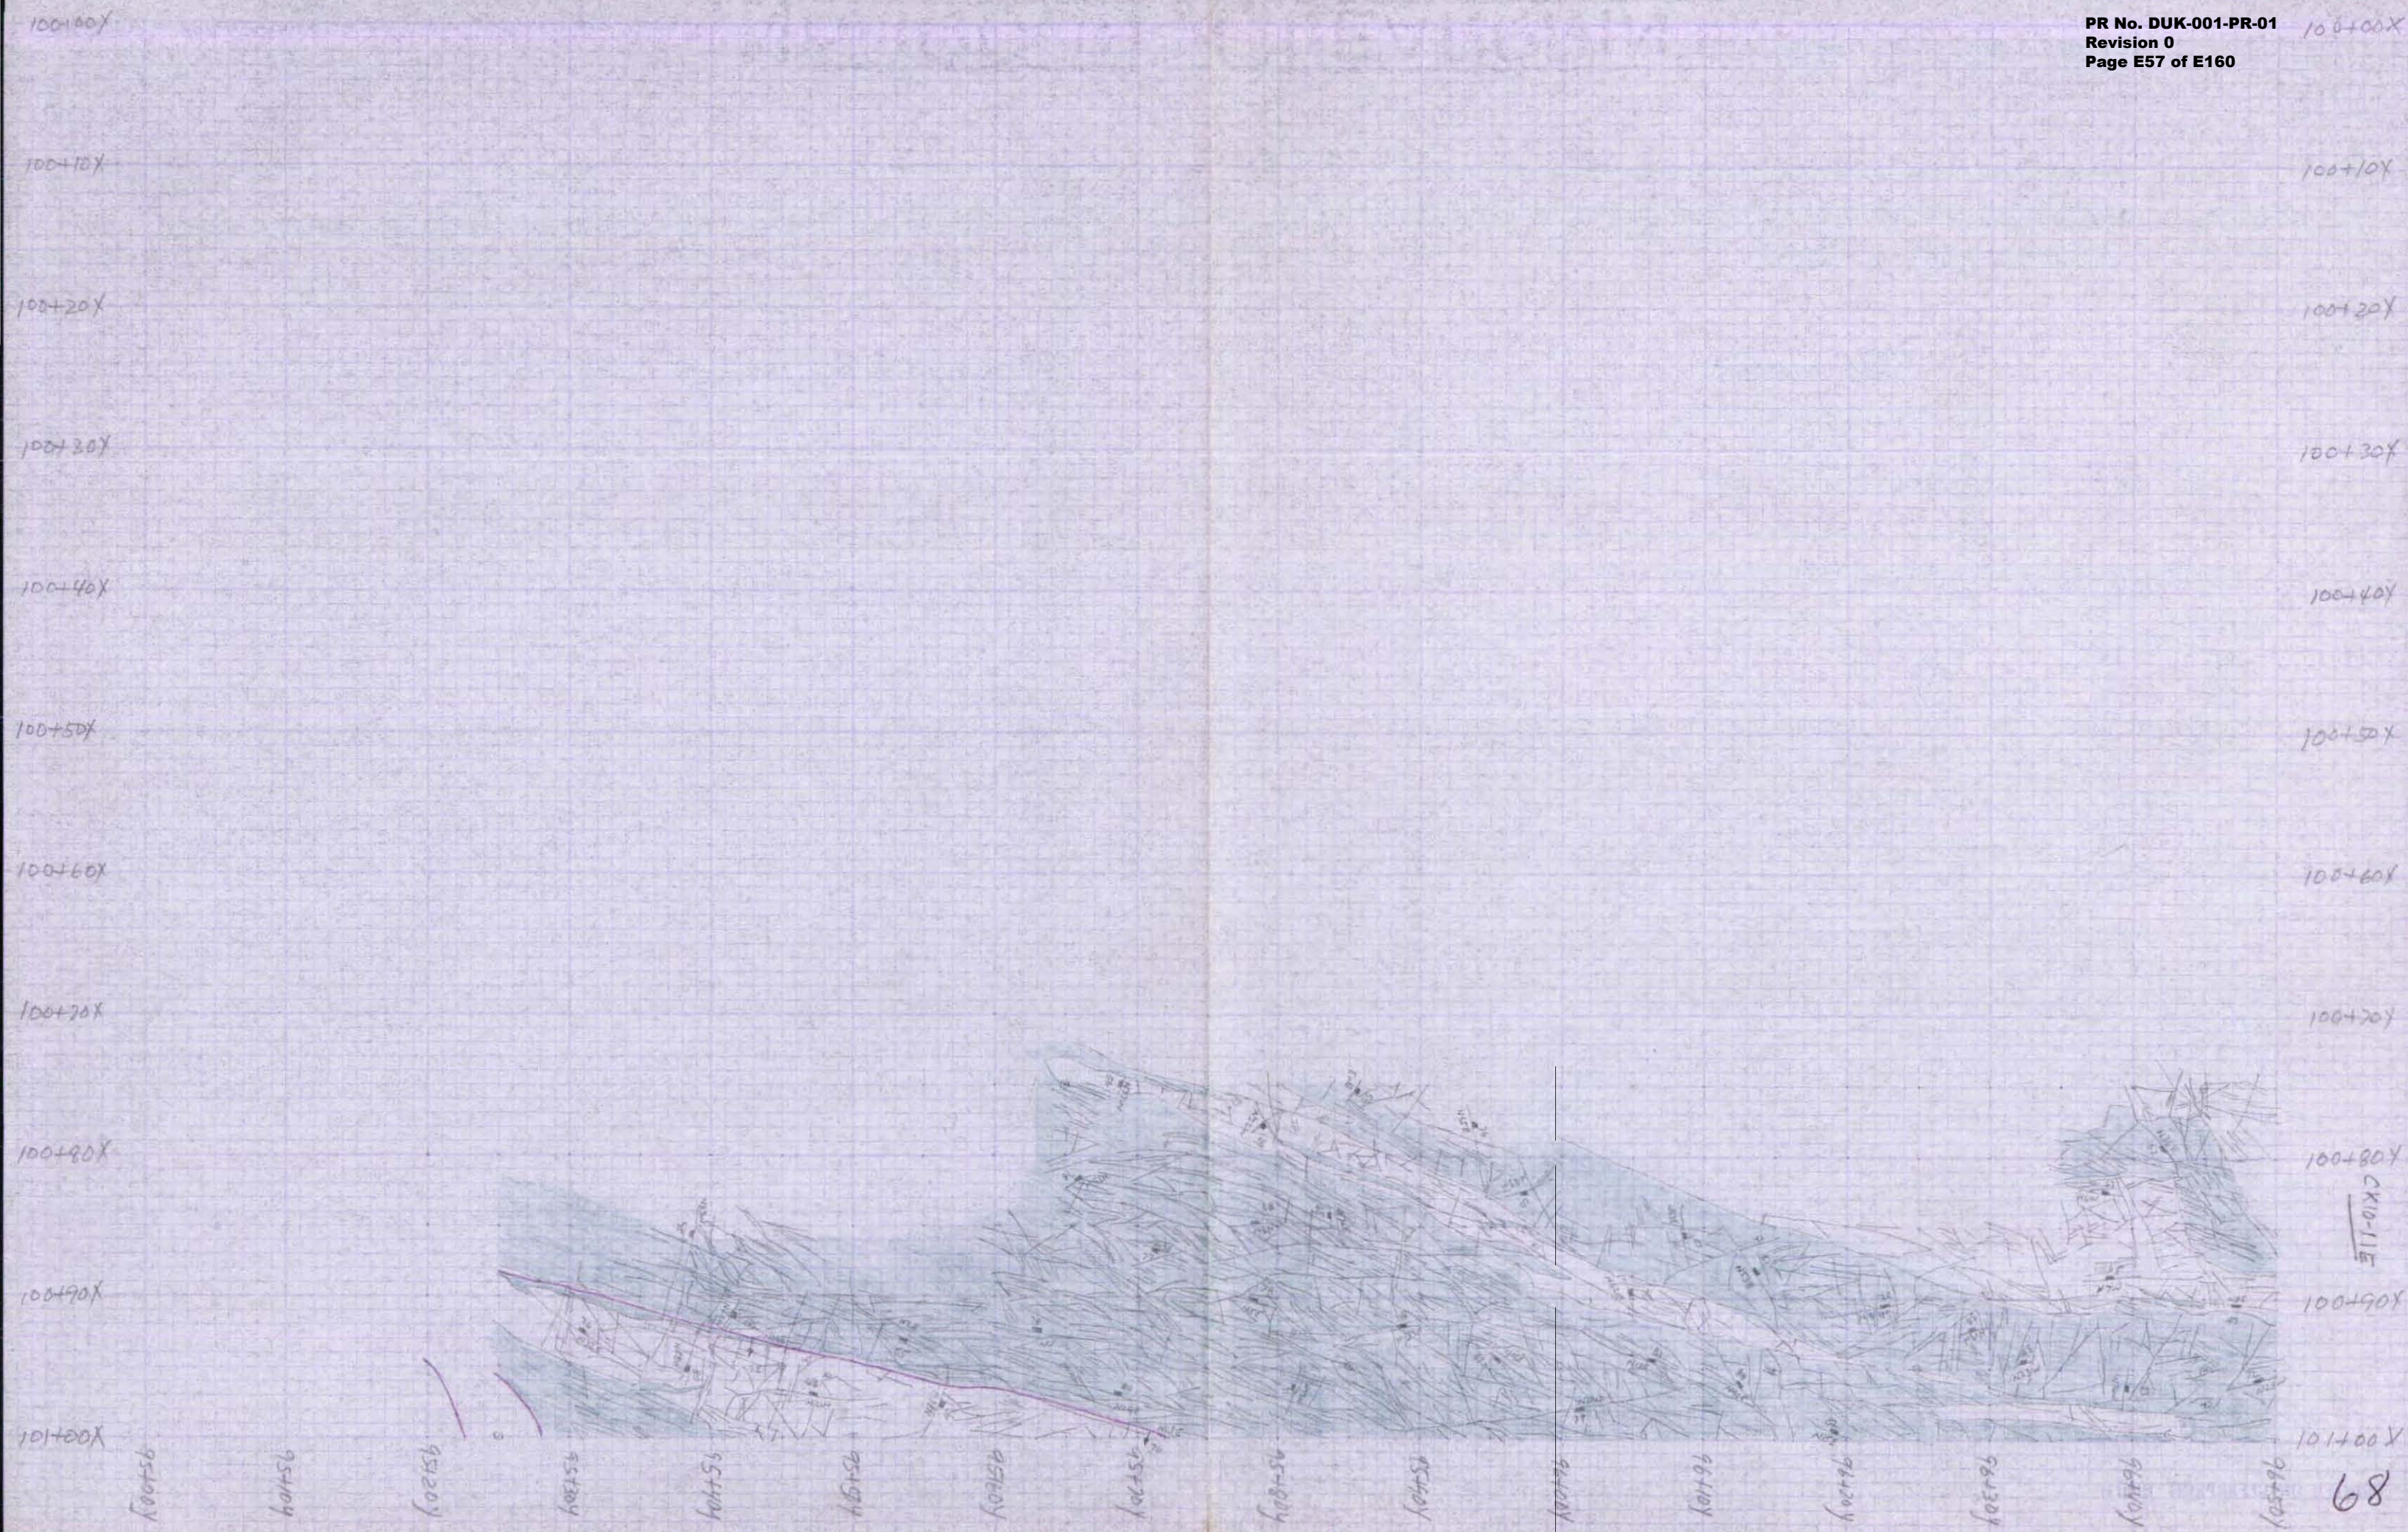


CR10-11E

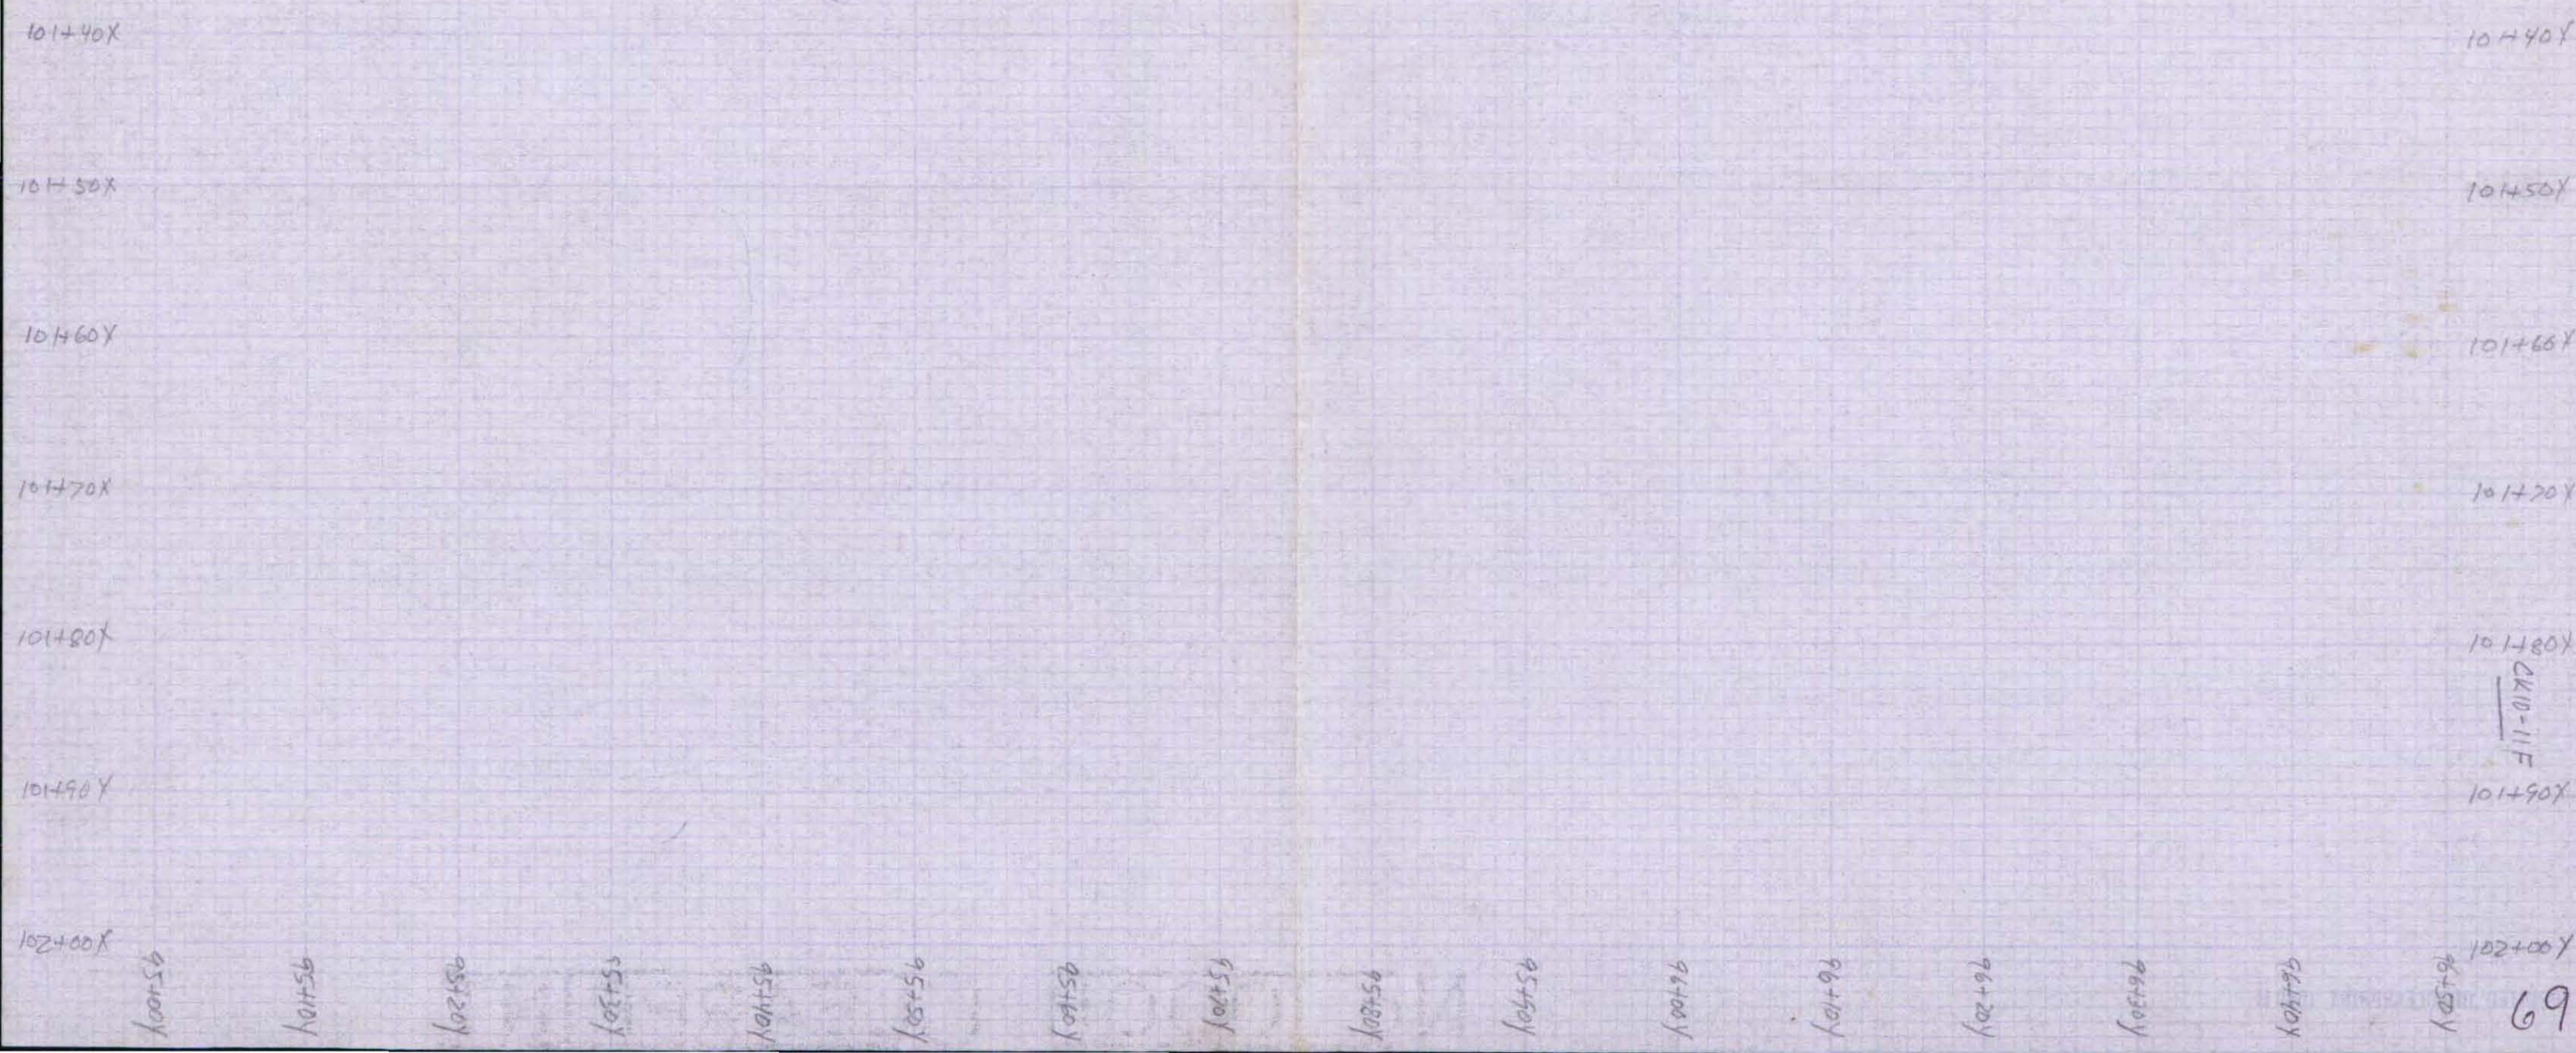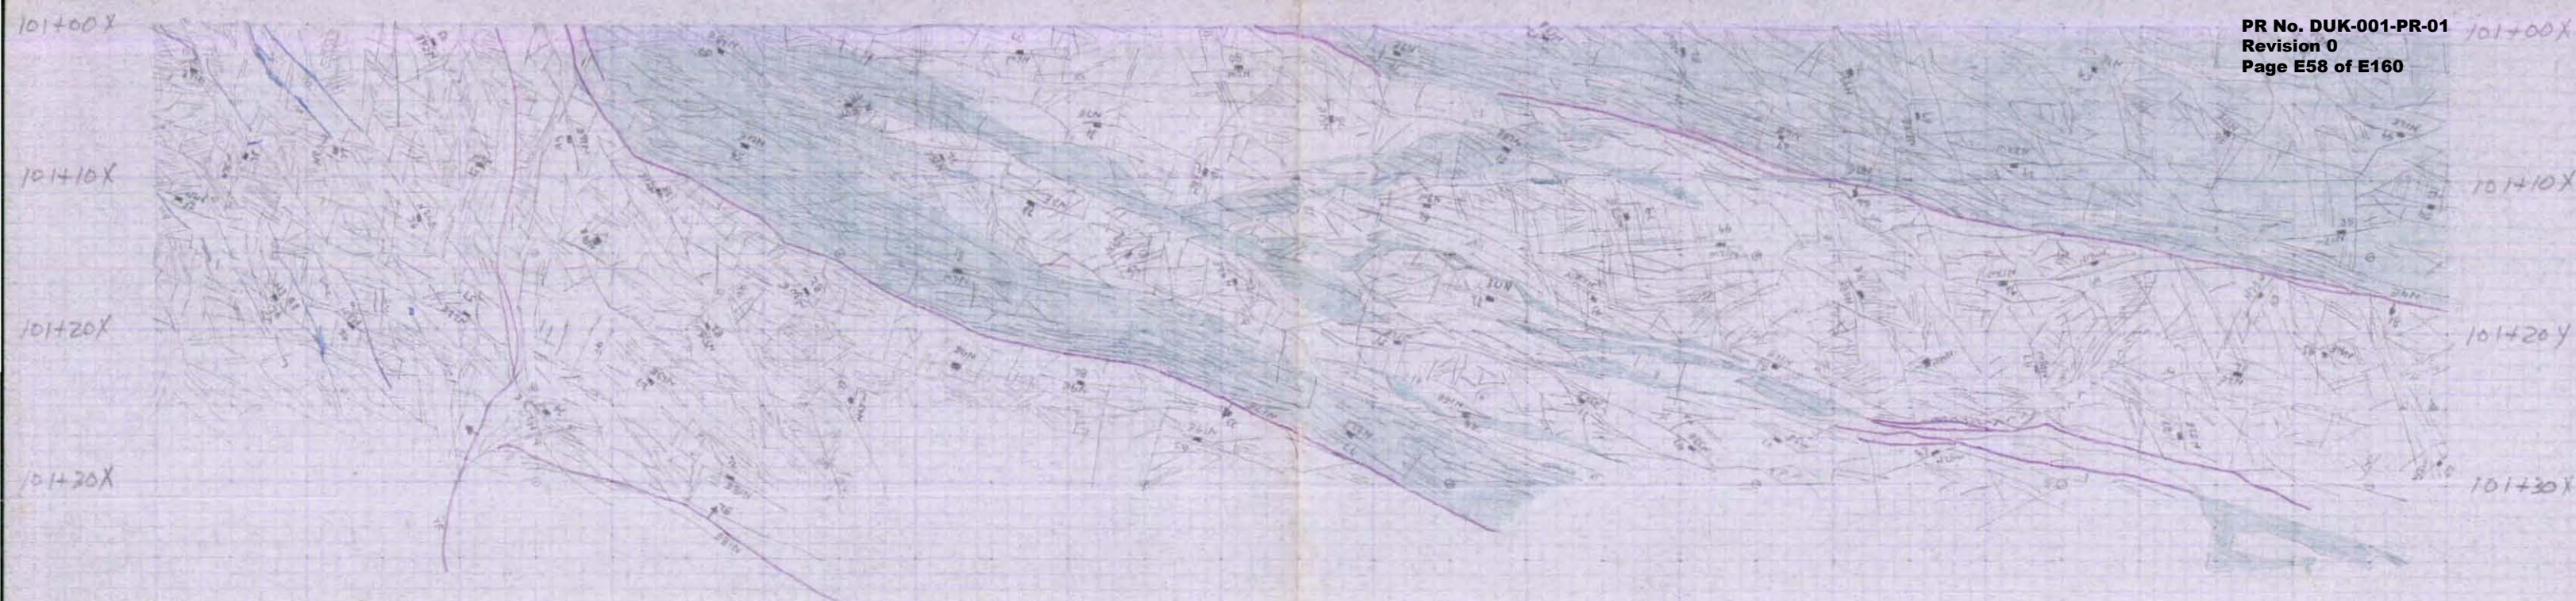

101+80X
101+90X
101+100X
101+110X
101+120X
101+130X
101+140X
101+150X
101+160X
101+170X
101+180X
101+190X
101+200X

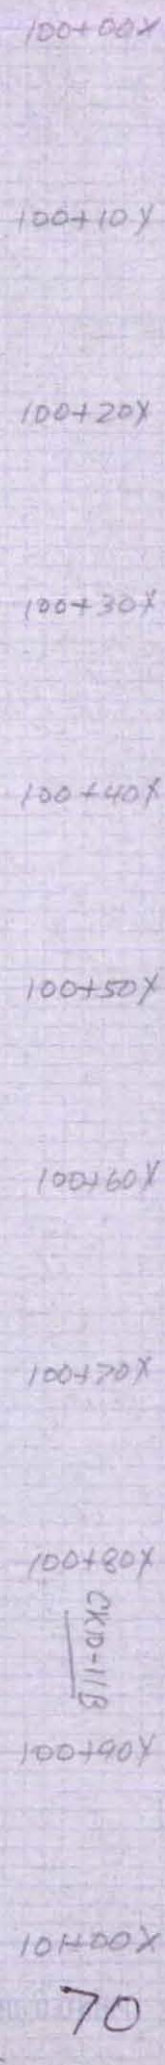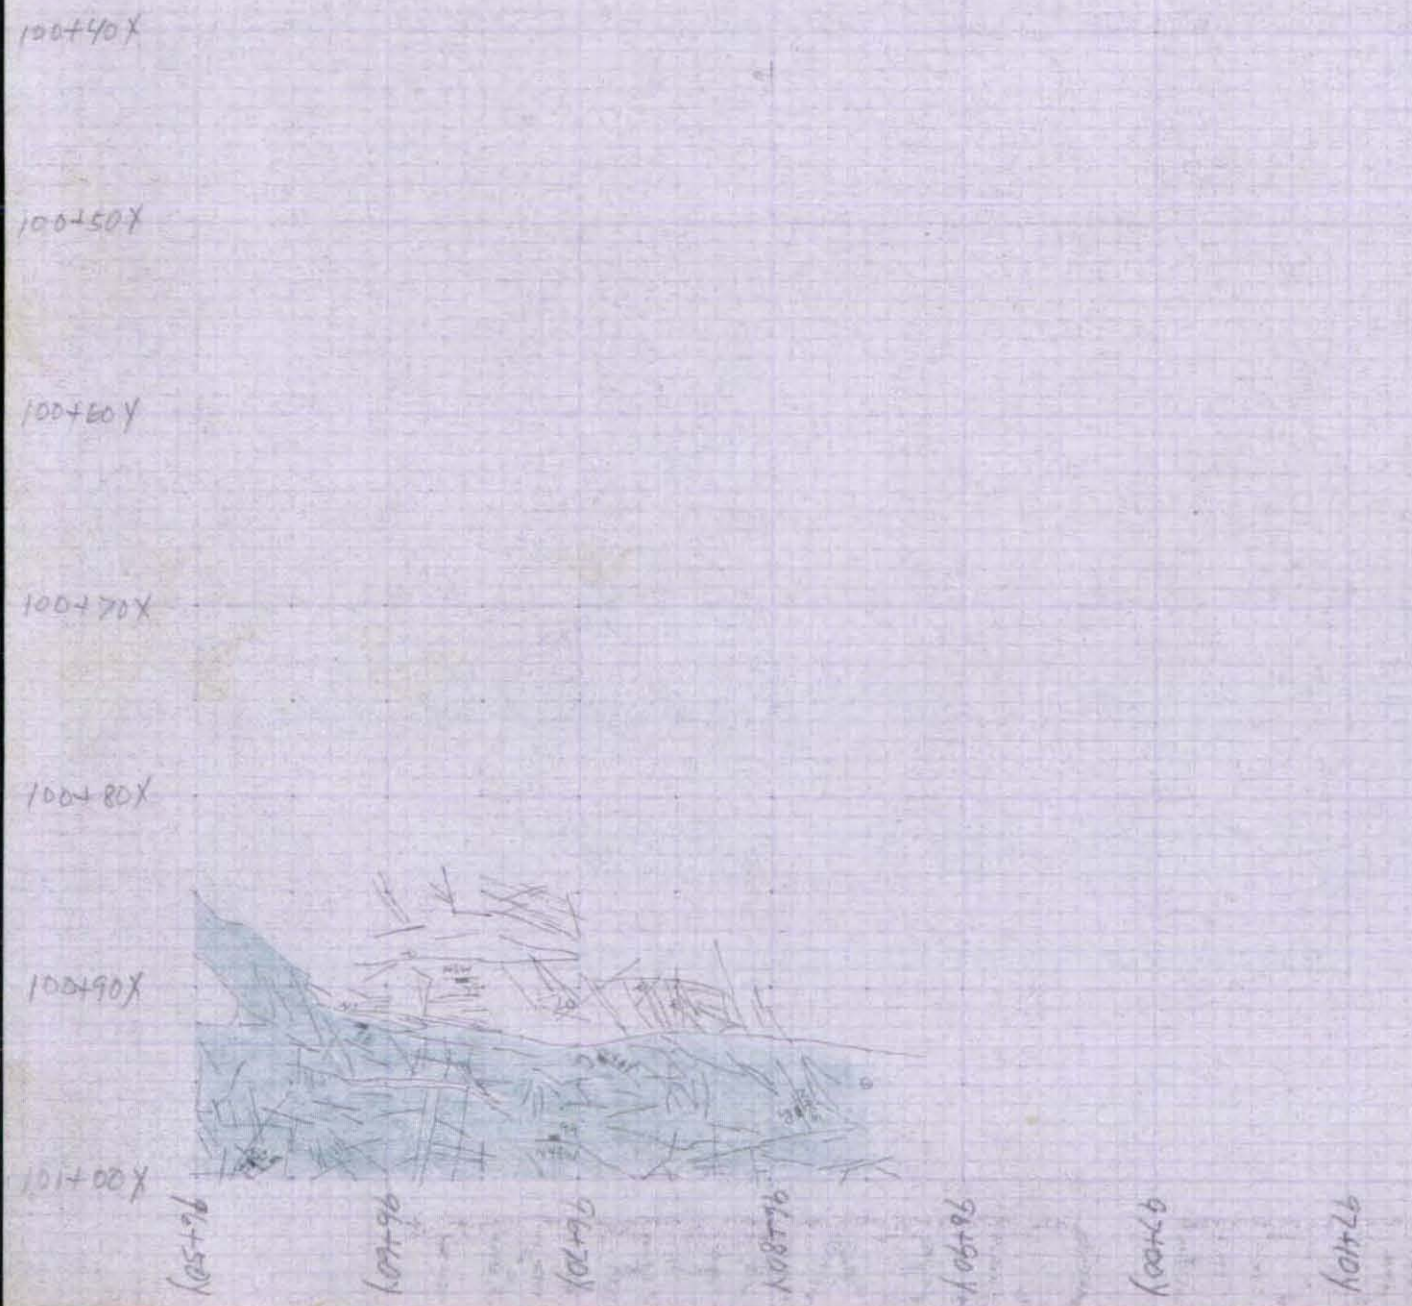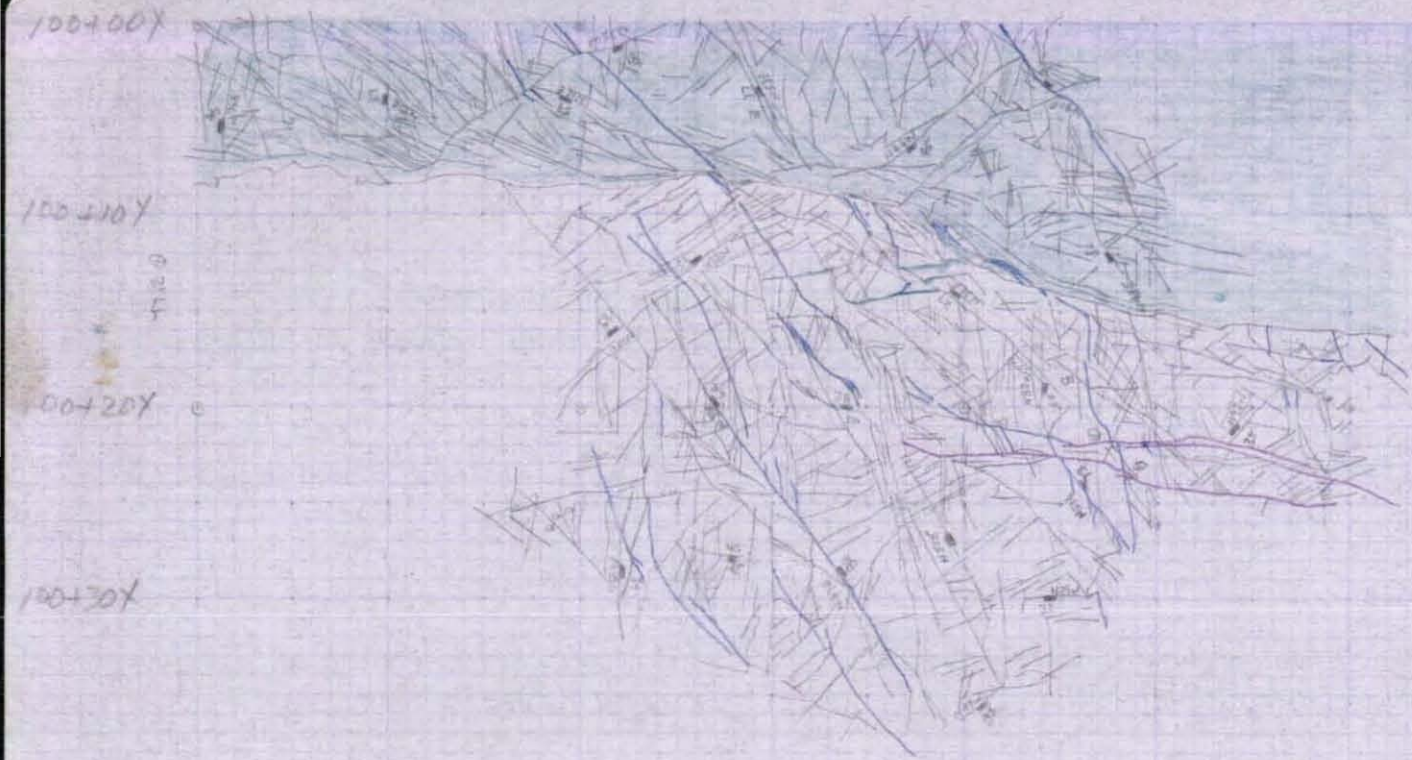



101+20Y

101+30%

 $101 + 40x$ $101 + 50x$

101460X

101470X


10/480X


CKID-11C

1014904


102+00X

71

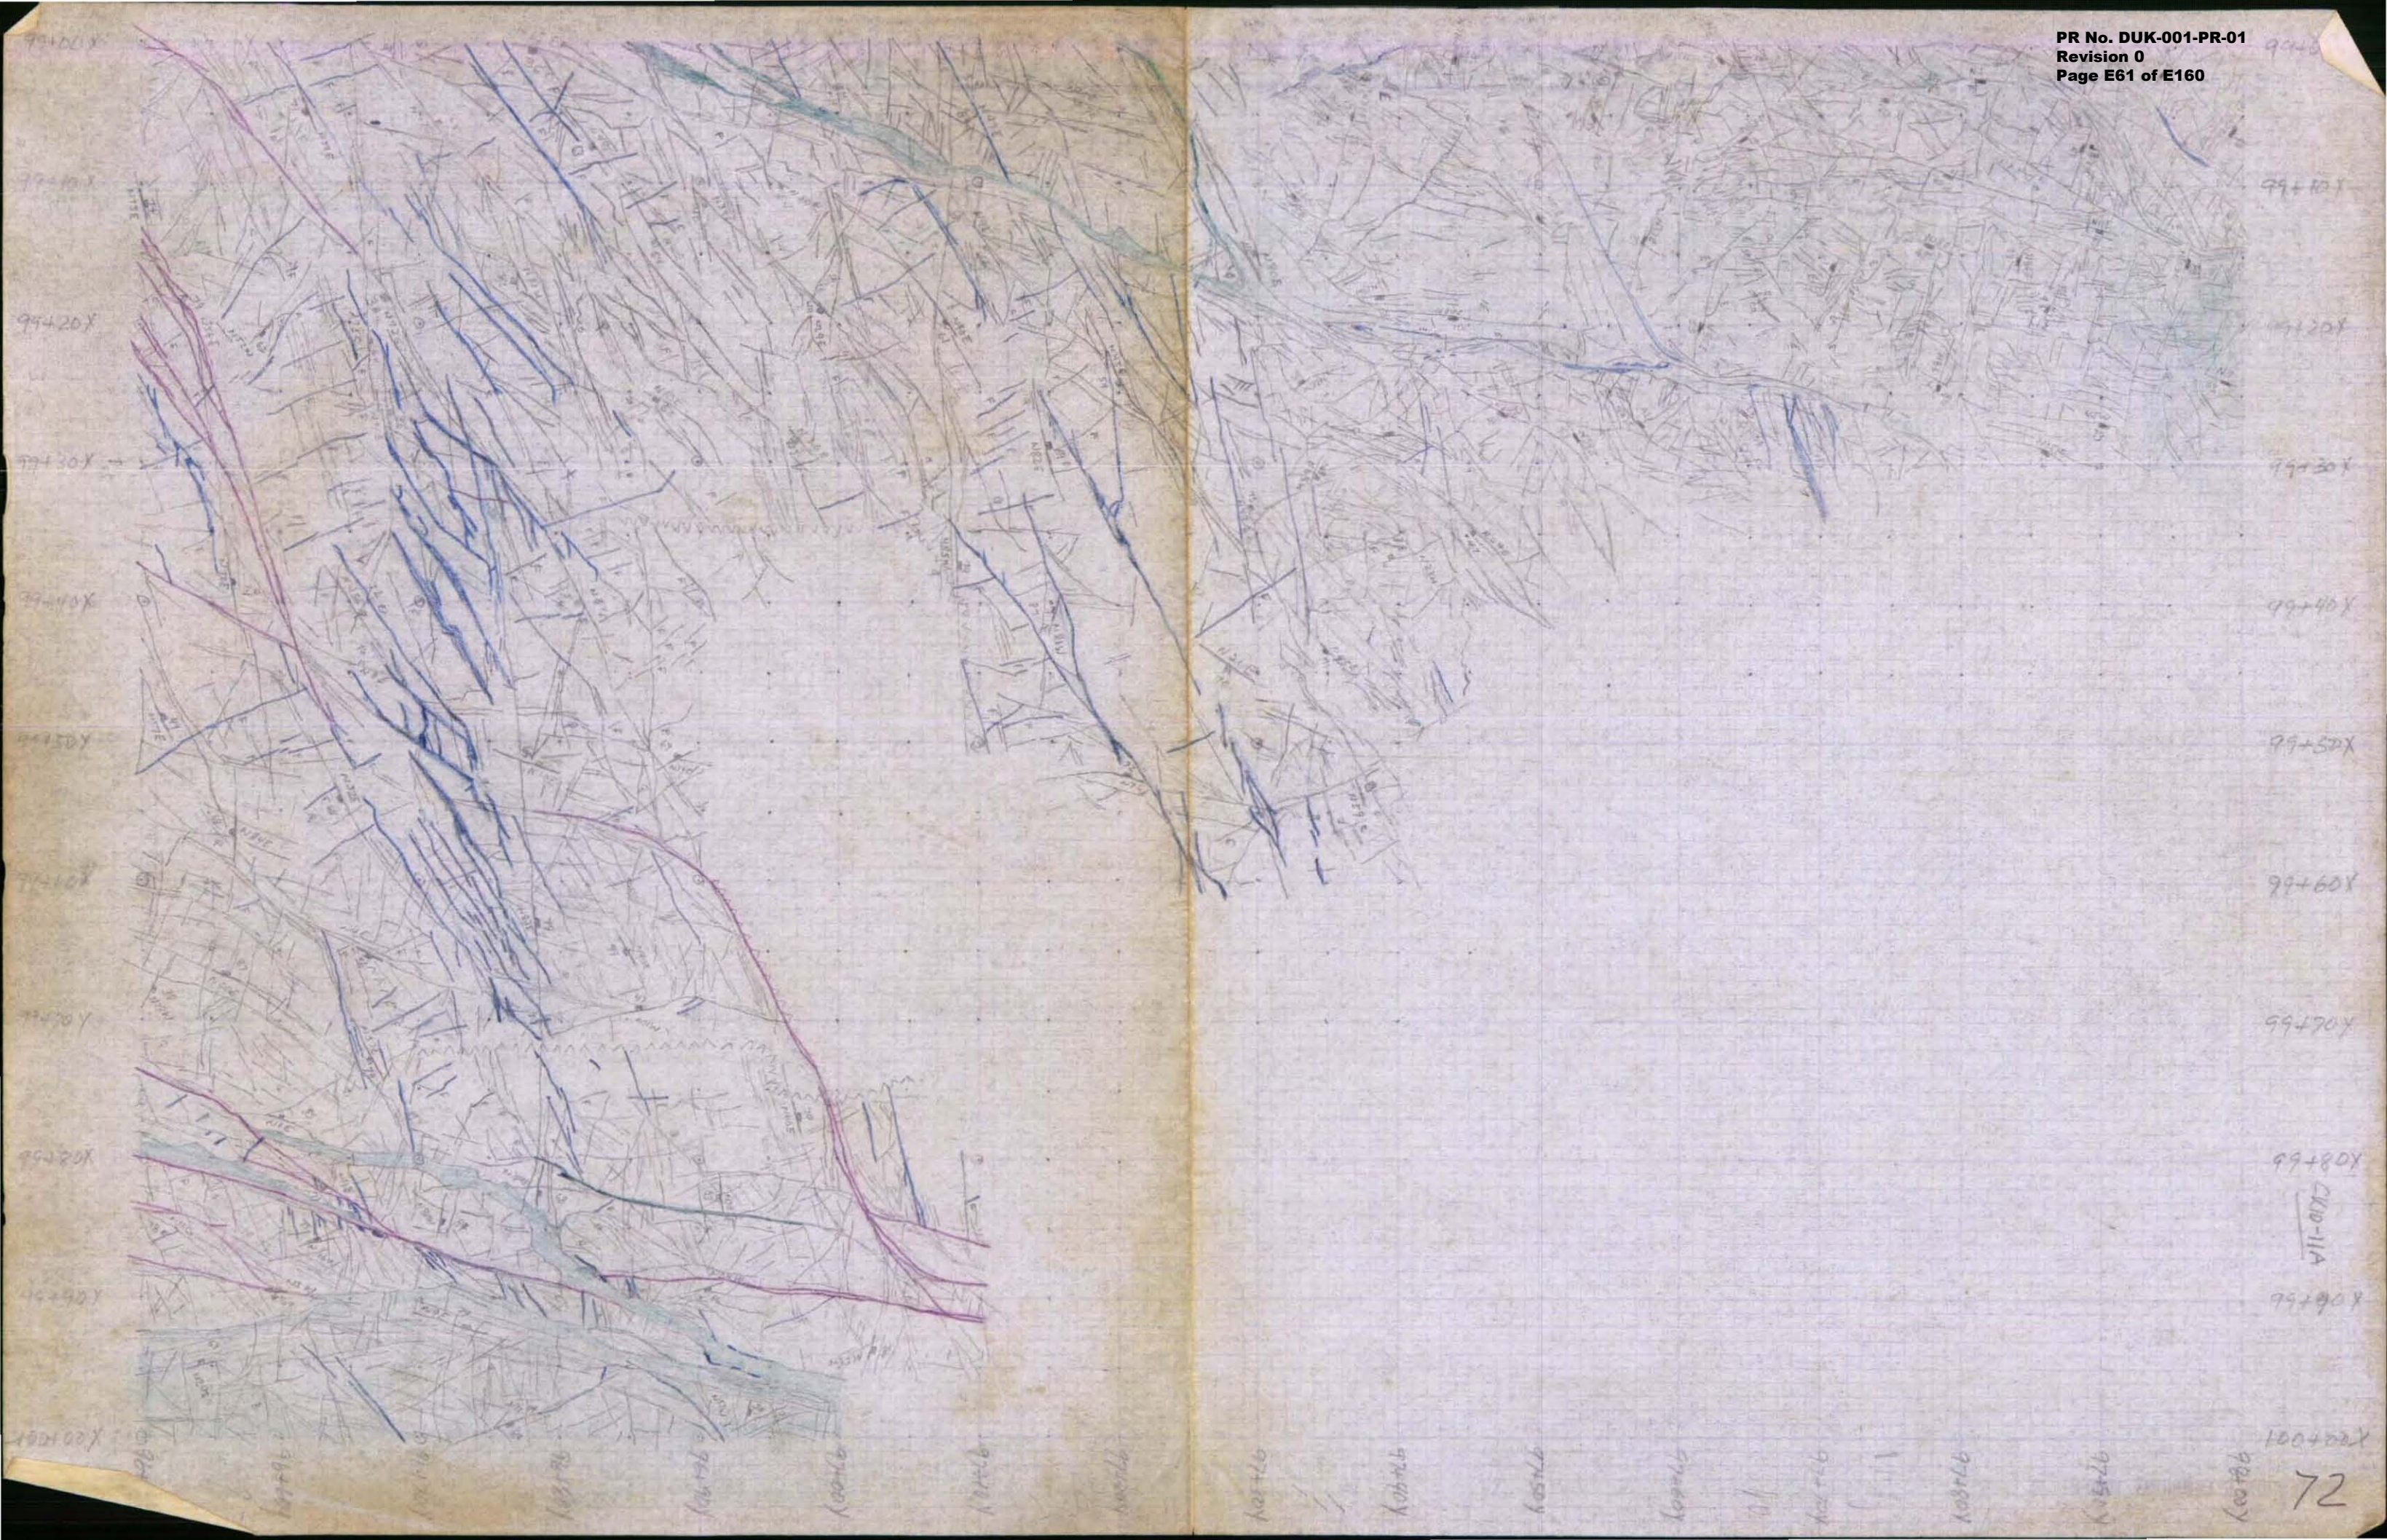

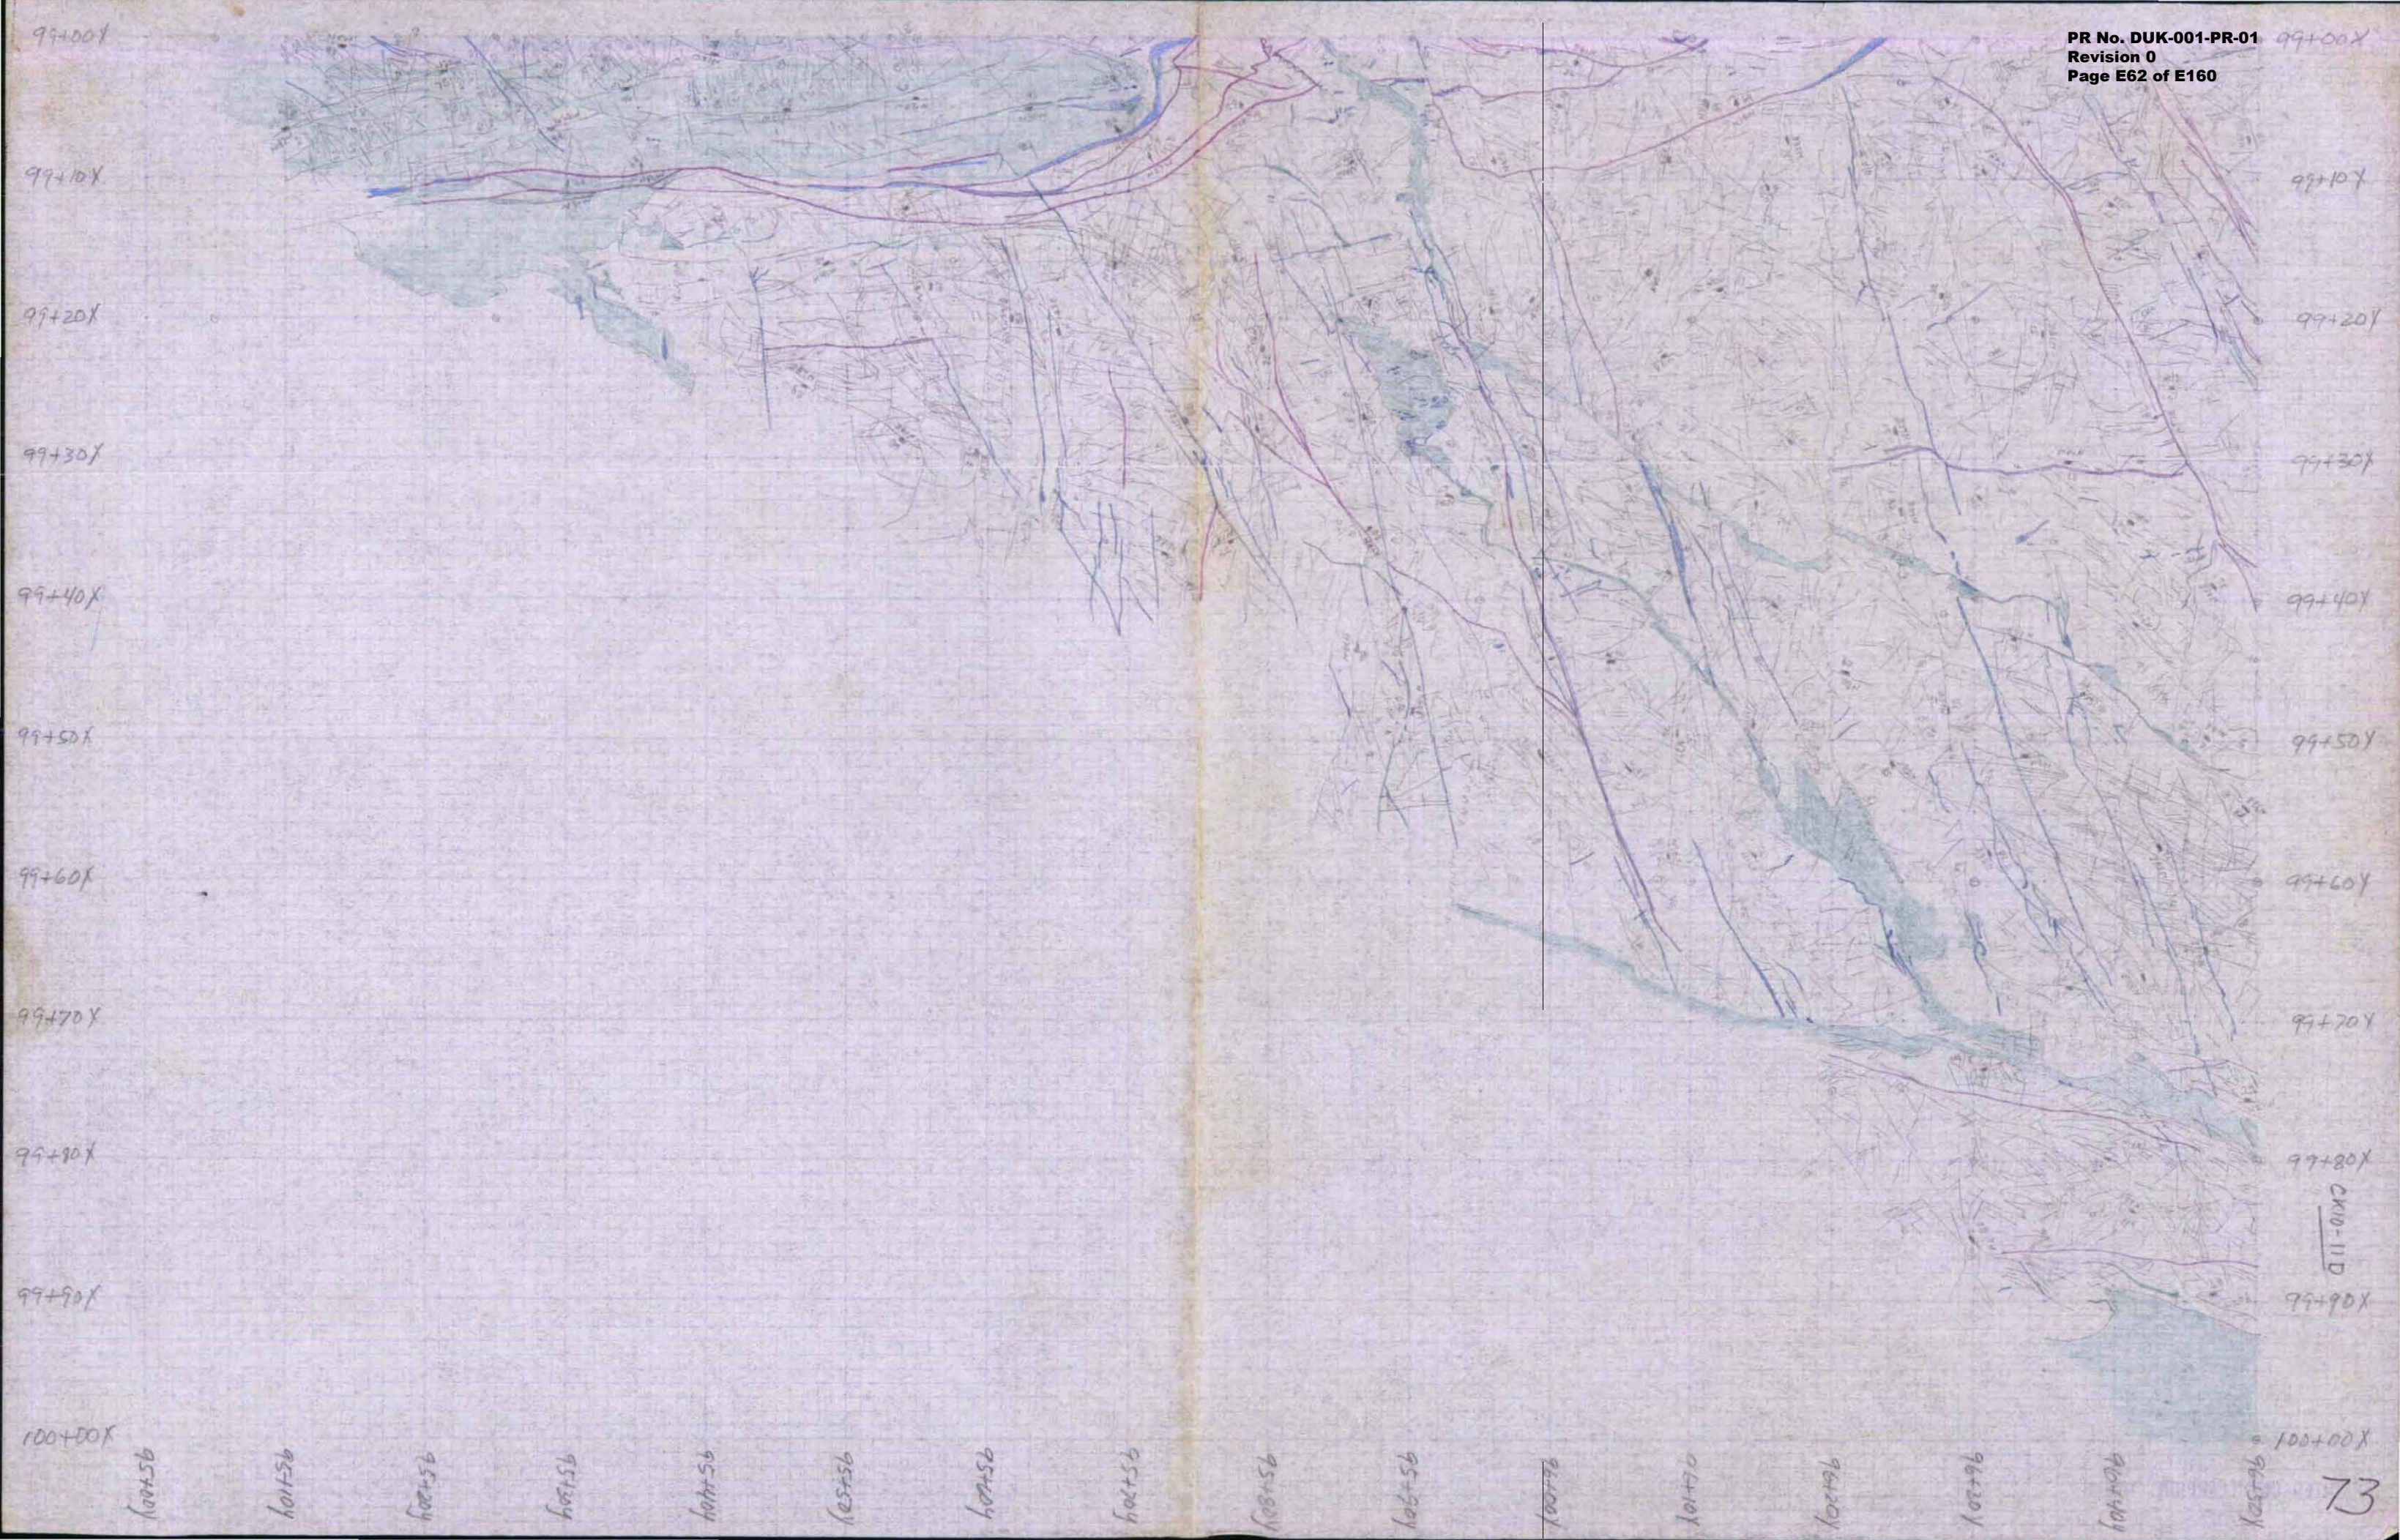

CRD-11D

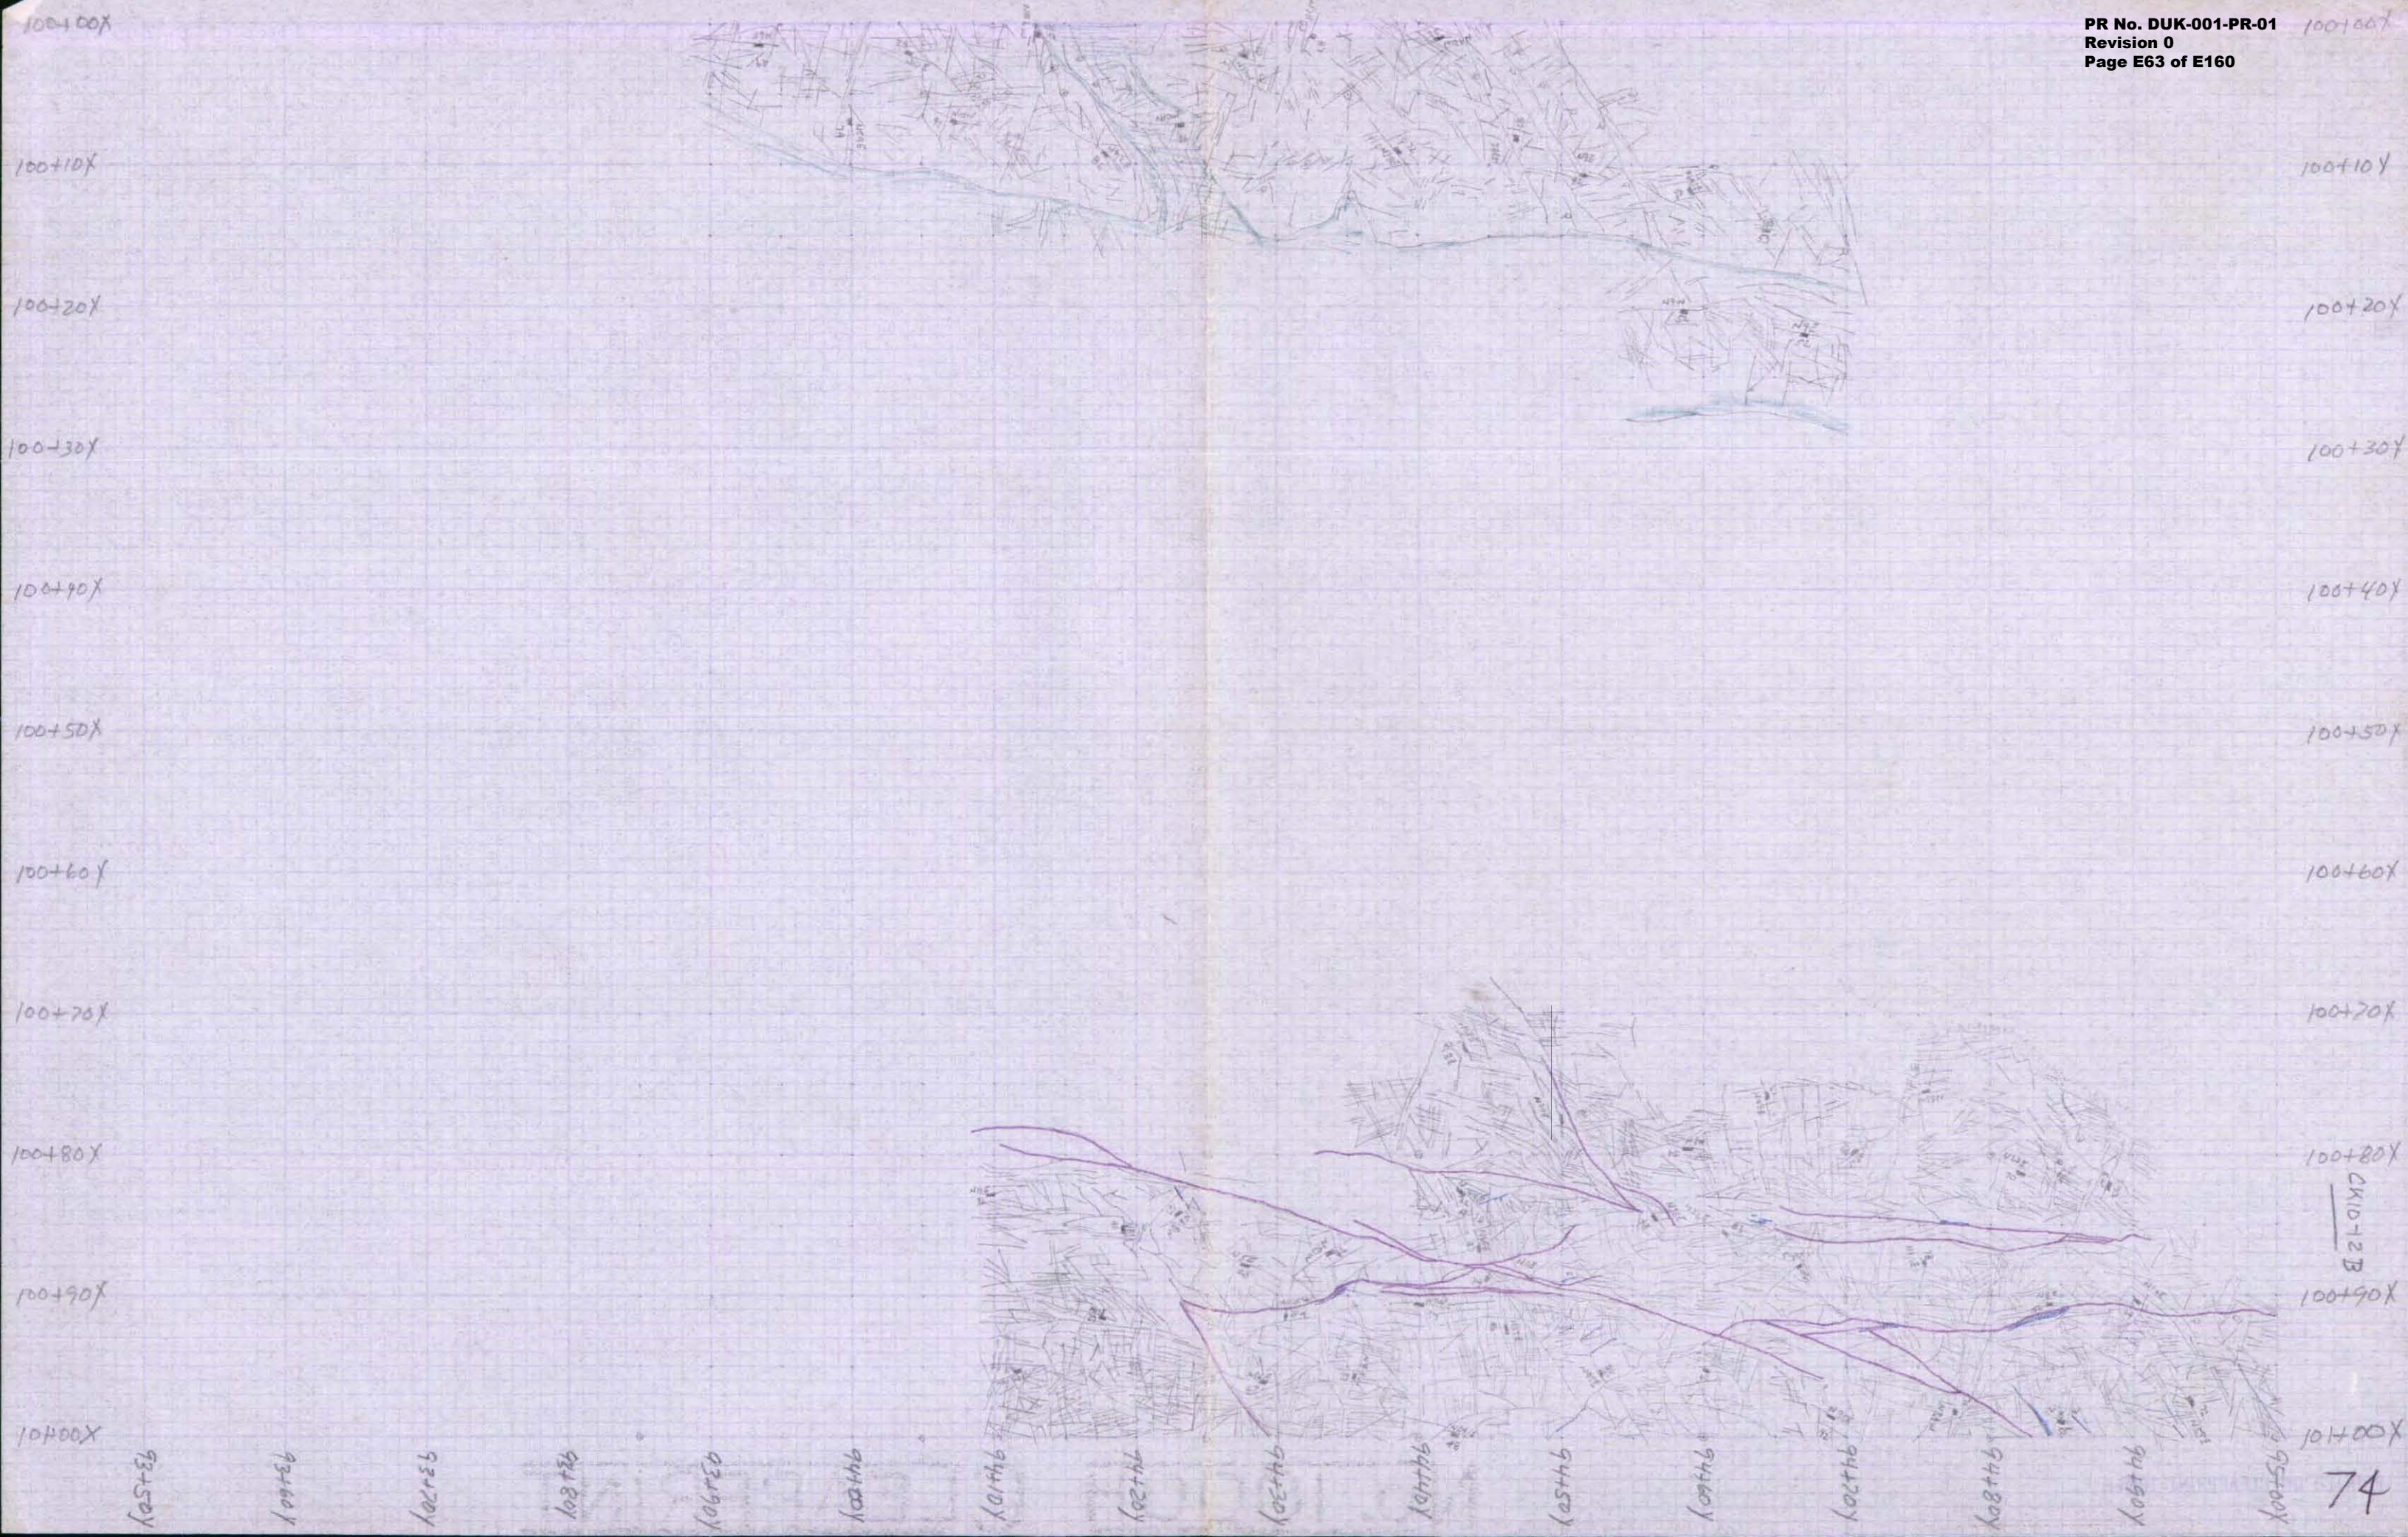

$101 + 104$

10 14 20 X

 $101 + 30x$

101440x

101450X

1014607

101+20%

10-1-80Y

101490Y

102400X

75

99+00X

99+10X

99+20X

99+30X

99+40X

99+50X

99+60X

99+70X

99+80X

99+90X

100+00X

76

CK10-12A

95+00X

94+80X

94+60X

94+40X

94+20X

94+00X

93+80X

93+60X

93+40X

93+20X

93+00X

92+80X

92+60X

92+40X

92+20X

92+00X

91+80X

91+60X

91+40X

91+20X

91+00X

90+80X

90+60X

90+40X

90+20X

90+00X

89+80X

89+60X

89+40X

89+20X

89+00X

88+80X

88+60X

88+40X

88+20X

88+00X

87+80X

87+60X

87+40X

87+20X

87+00X

86+80X

86+60X

86+40X

86+20X

86+00X

85+80X

85+60X

85+40X

85+20X

85+00X

84+80X

84+60X

84+40X

84+20X

84+00X

83+80X

83+60X

83+40X

83+20X

83+00X

82+80X

82+60X

82+40X

82+20X

82+00X

81+80X

81+60X

81+40X

81+20X

81+00X

80+80X

80+60X

80+40X

80+20X

80+00X

79+80X

79+60X

79+40X

79+20X

79+00X

78+80X

78+60X

78+40X

78+20X

78+00X

77+80X

77+60X

77+40X

77+20X

77+00X

76+80X

76+60X

76+40X

76+20X

76+00X

75+80X

75+60X

75+40X

75+20X

75+00X

74+80X

74+60X

74+40X

74+20X

74+00X

73+80X

73+60X

73+40X

73+20X

73+00X

72+80X

72+60X

72+40X

72+20X

72+00X

71+80X

71+60X

71+40X

71+20X

71+00X

70+80X

70+60X

70+40X

70+20X

70+00X

69+80X

69+60X

69+40X

69+20X

69+00X

68+80X

68+60X

68+40X

68+20X

68+00X

67+80X

67+60X

67+40X

67+20X

67+00X

66+80X

66+60X

66+40X

66+20X

66+00X

65+80X

65+60X

65+40X

65+20X

65+00X

64+80X

64+60X

64+40X

64+20X

64+00X

63+80X

63+60X

63+40X

63+20X

63+00X

62+80X

62+60X

62+40X

62+20X

62+00X

61+80X

61+60X

61+40X

61+20X

61+00X

60+80X

60+60X

60+40X

60+20X

60+00X

59+80X

59+60X

59+40X

59+20X

59+00X

58+80X

58+60X

58+40X

58+20X

58+00X

57+80X

57+60X

57+40X

57+20X

57+00X

56+80X

56+60X

56+40X

56+20X

56+00X

55+80X

55+60X

55+40X

55+20X

55+00X

54+80X

54+60X

54+40X

54+20X

54+00X

53+80X

53+60X

53+40X

53+20X

53+00X

52+80X

52+60X

52+40X

52+20X

52+00X

51+80X

51+60X

51+40X

51+20X

51+00X

50+80X

50+60X

50+40X

50+20X

50+00X

49+80X

49+60X

49+40X

49+20X

49+00X

48+80X

48+60X

48+40X

48+20X

48+00X

47+80X

47+60X

47+40X

47+20X

47+00X

46+80X

46+60X

46+40X

46+20X

46+00X

45+80X

45+60X

45+40X

45+20X

45+00X

44+80X

44+60X

44+40X

44+20X

44+00X

43+80X

43+60X

43+40X

43+20X

43+00X

42+80X

42+60X

42+40X

42+20X

42+00X

41+80X

41+60X

41+40X

41+20X

41+00X

40+80X

40+60X

40+40X

40+20X

40+00X

39+80X

39+60X

39+40X

39+20X

39+00X

38+80X

38+60X

38+40X

38+20X

38+00X

37+80X

37+60X

102+00X

102+10X

102+20X

102+30X

102+40X

102+50X

102+60X

102+70X

102+80X

102+90X

103+00X

77

102+90X

102+40X

102+30X

102+20X

102+10X

102+00X

101+90X

101+80X

101+70X

101+60X

101+50X

101+40X

101+30X

101+20X

101+10X

101+00X

CK10-13A

102+80X

102+70X

102+60X

102+50X


102+40X

102+30X

102+20X

102+10X

102+00X

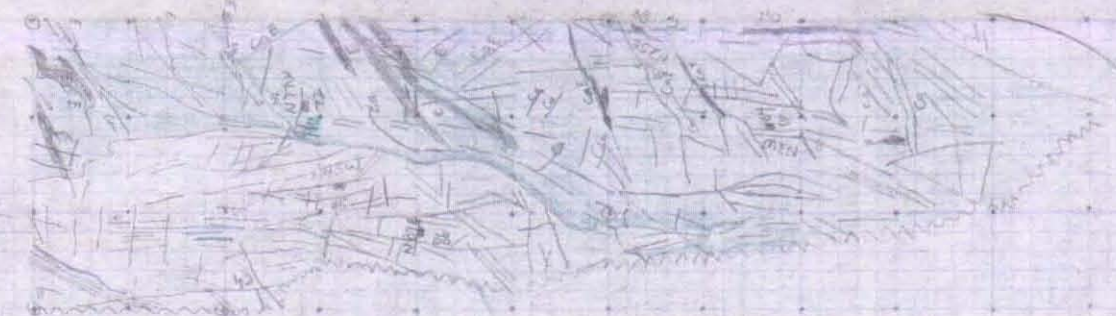

CL BY
PR/ET

102+00X

102+10X

102+20X

102+30X

102+40X

102+50X

102+60X


102+70X

102+80X

102+90X

103+00X

CK10-13A

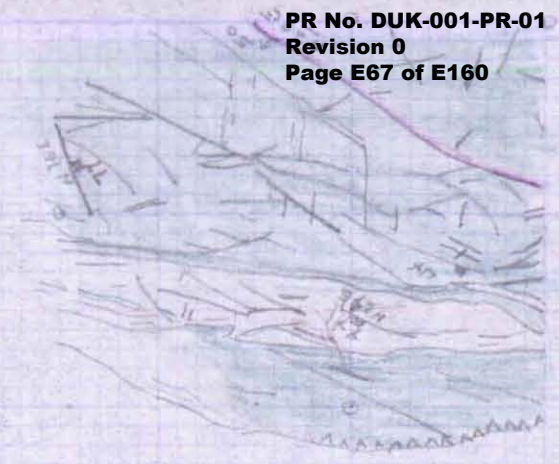

102+00X

102+00X

102+10X

102+10X

102+20X

102+20X

102+30X

102+30X

102+40X

102+40X

102+50X

102+50X

102+60X

102+60X

102+70X

102+70X

102+80X

102+80X

102+90X

102+90X

CK10-14B

CK10-14B

103+00X

103+00X

98+00Y

98+10Y

98+20Y

98+30Y

98+40Y

98+50Y

98+60Y

98+70Y

98+80Y

98+90Y

99+00Y

99+10Y

99+20Y


99+30Y

99+40Y

99+50Y

Replacement Scans
(Transmitted June 4, 2010)

- 49 CK10-07A.JPEG
- 52 CK10-07D.JPEG
- 62 CK10-10B.JPEG
- 69 CK10-11F.JPEG
- 73 CK10-11D.JPEG

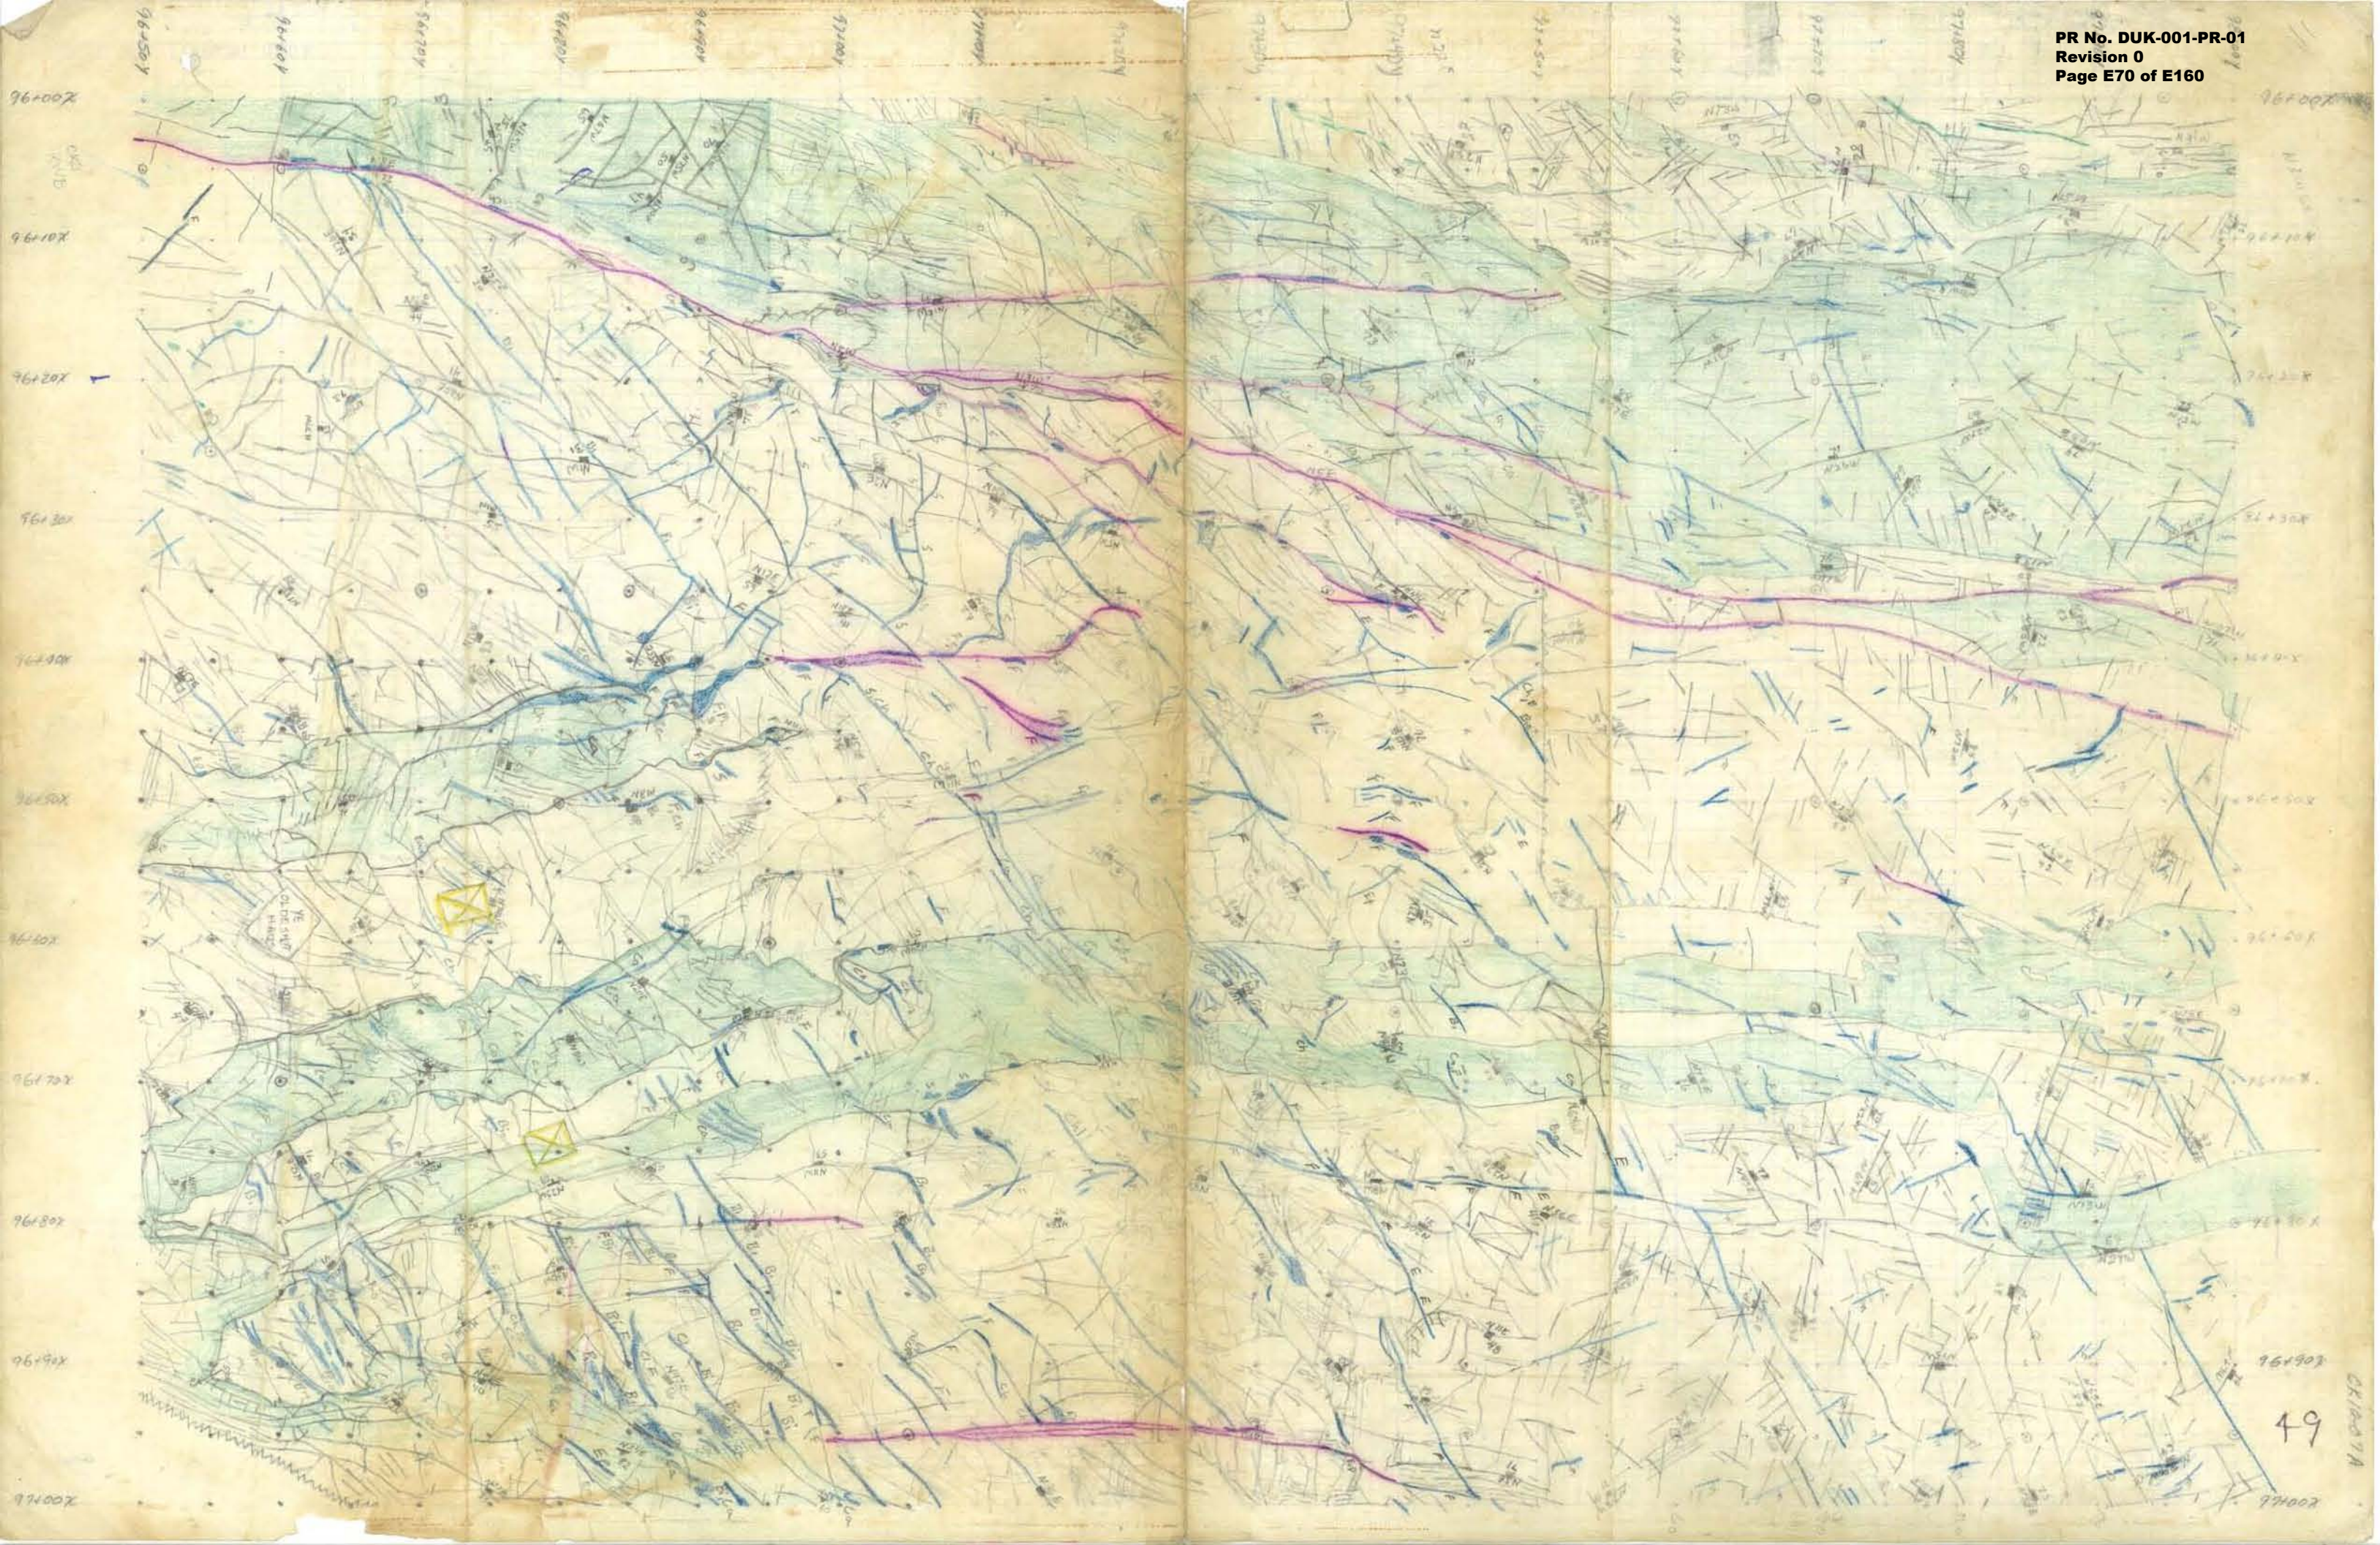

97+00X

97+10X

97+20X

97+30X

97+40X

97+50X

97+60X

97+70X

97+80X

97+90X

98+00X

96+50X

CK10-07D

52

97+00X

97+10X

97+20X

97+30X

97+40X

97+50X

97+60X


97+70X


97+80X

97+90X

98+00X

95+50X

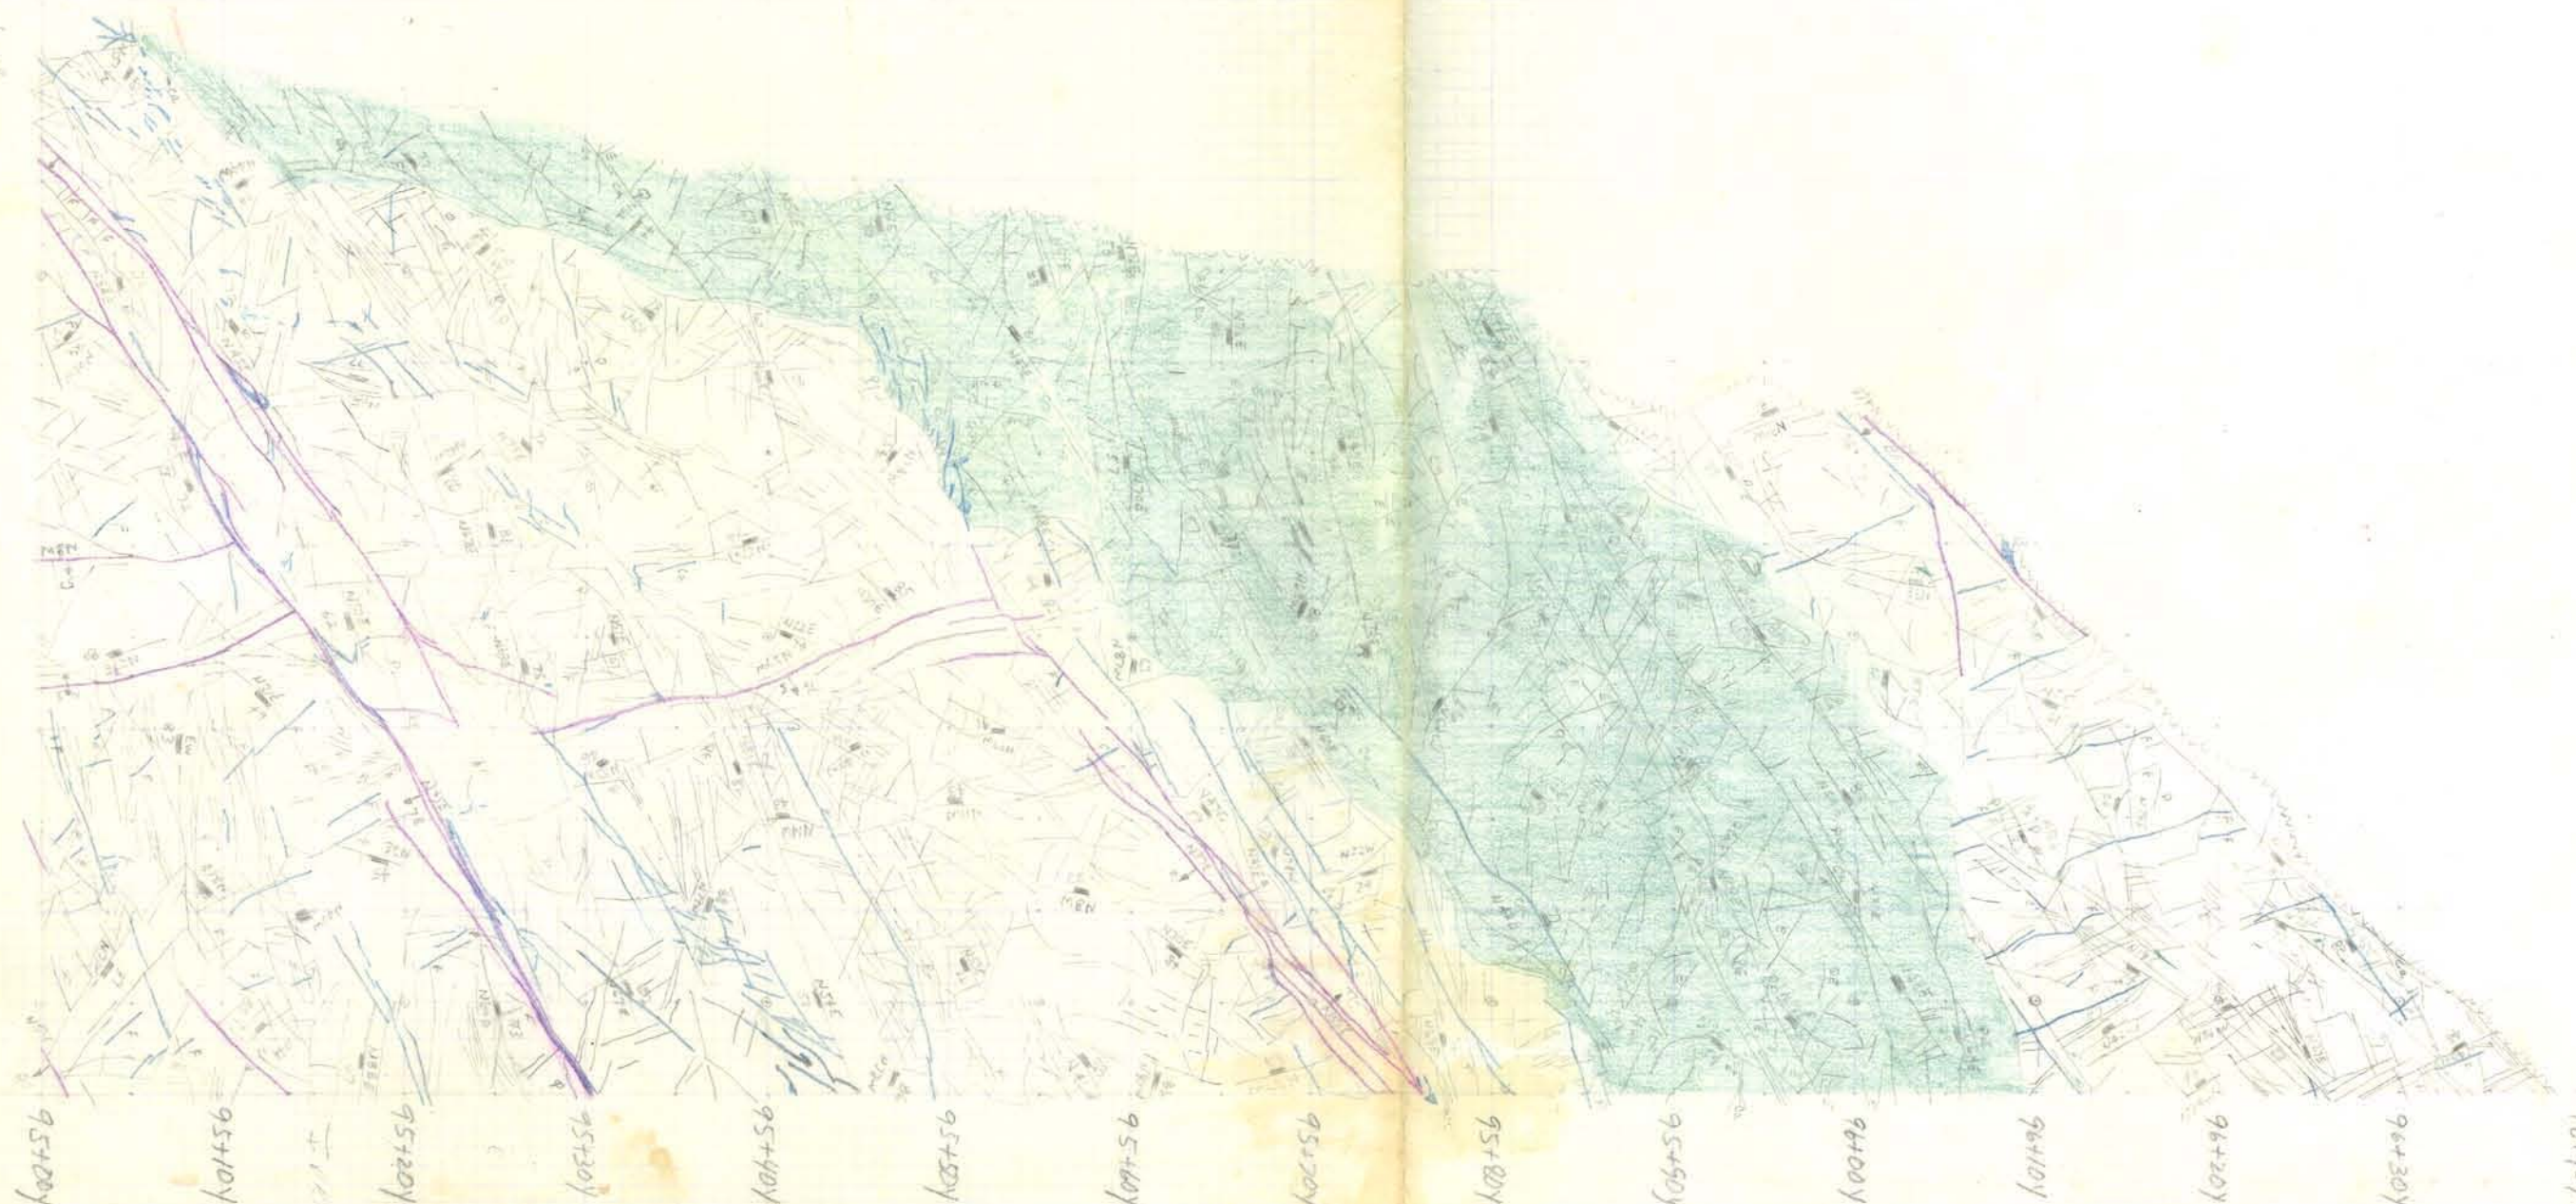

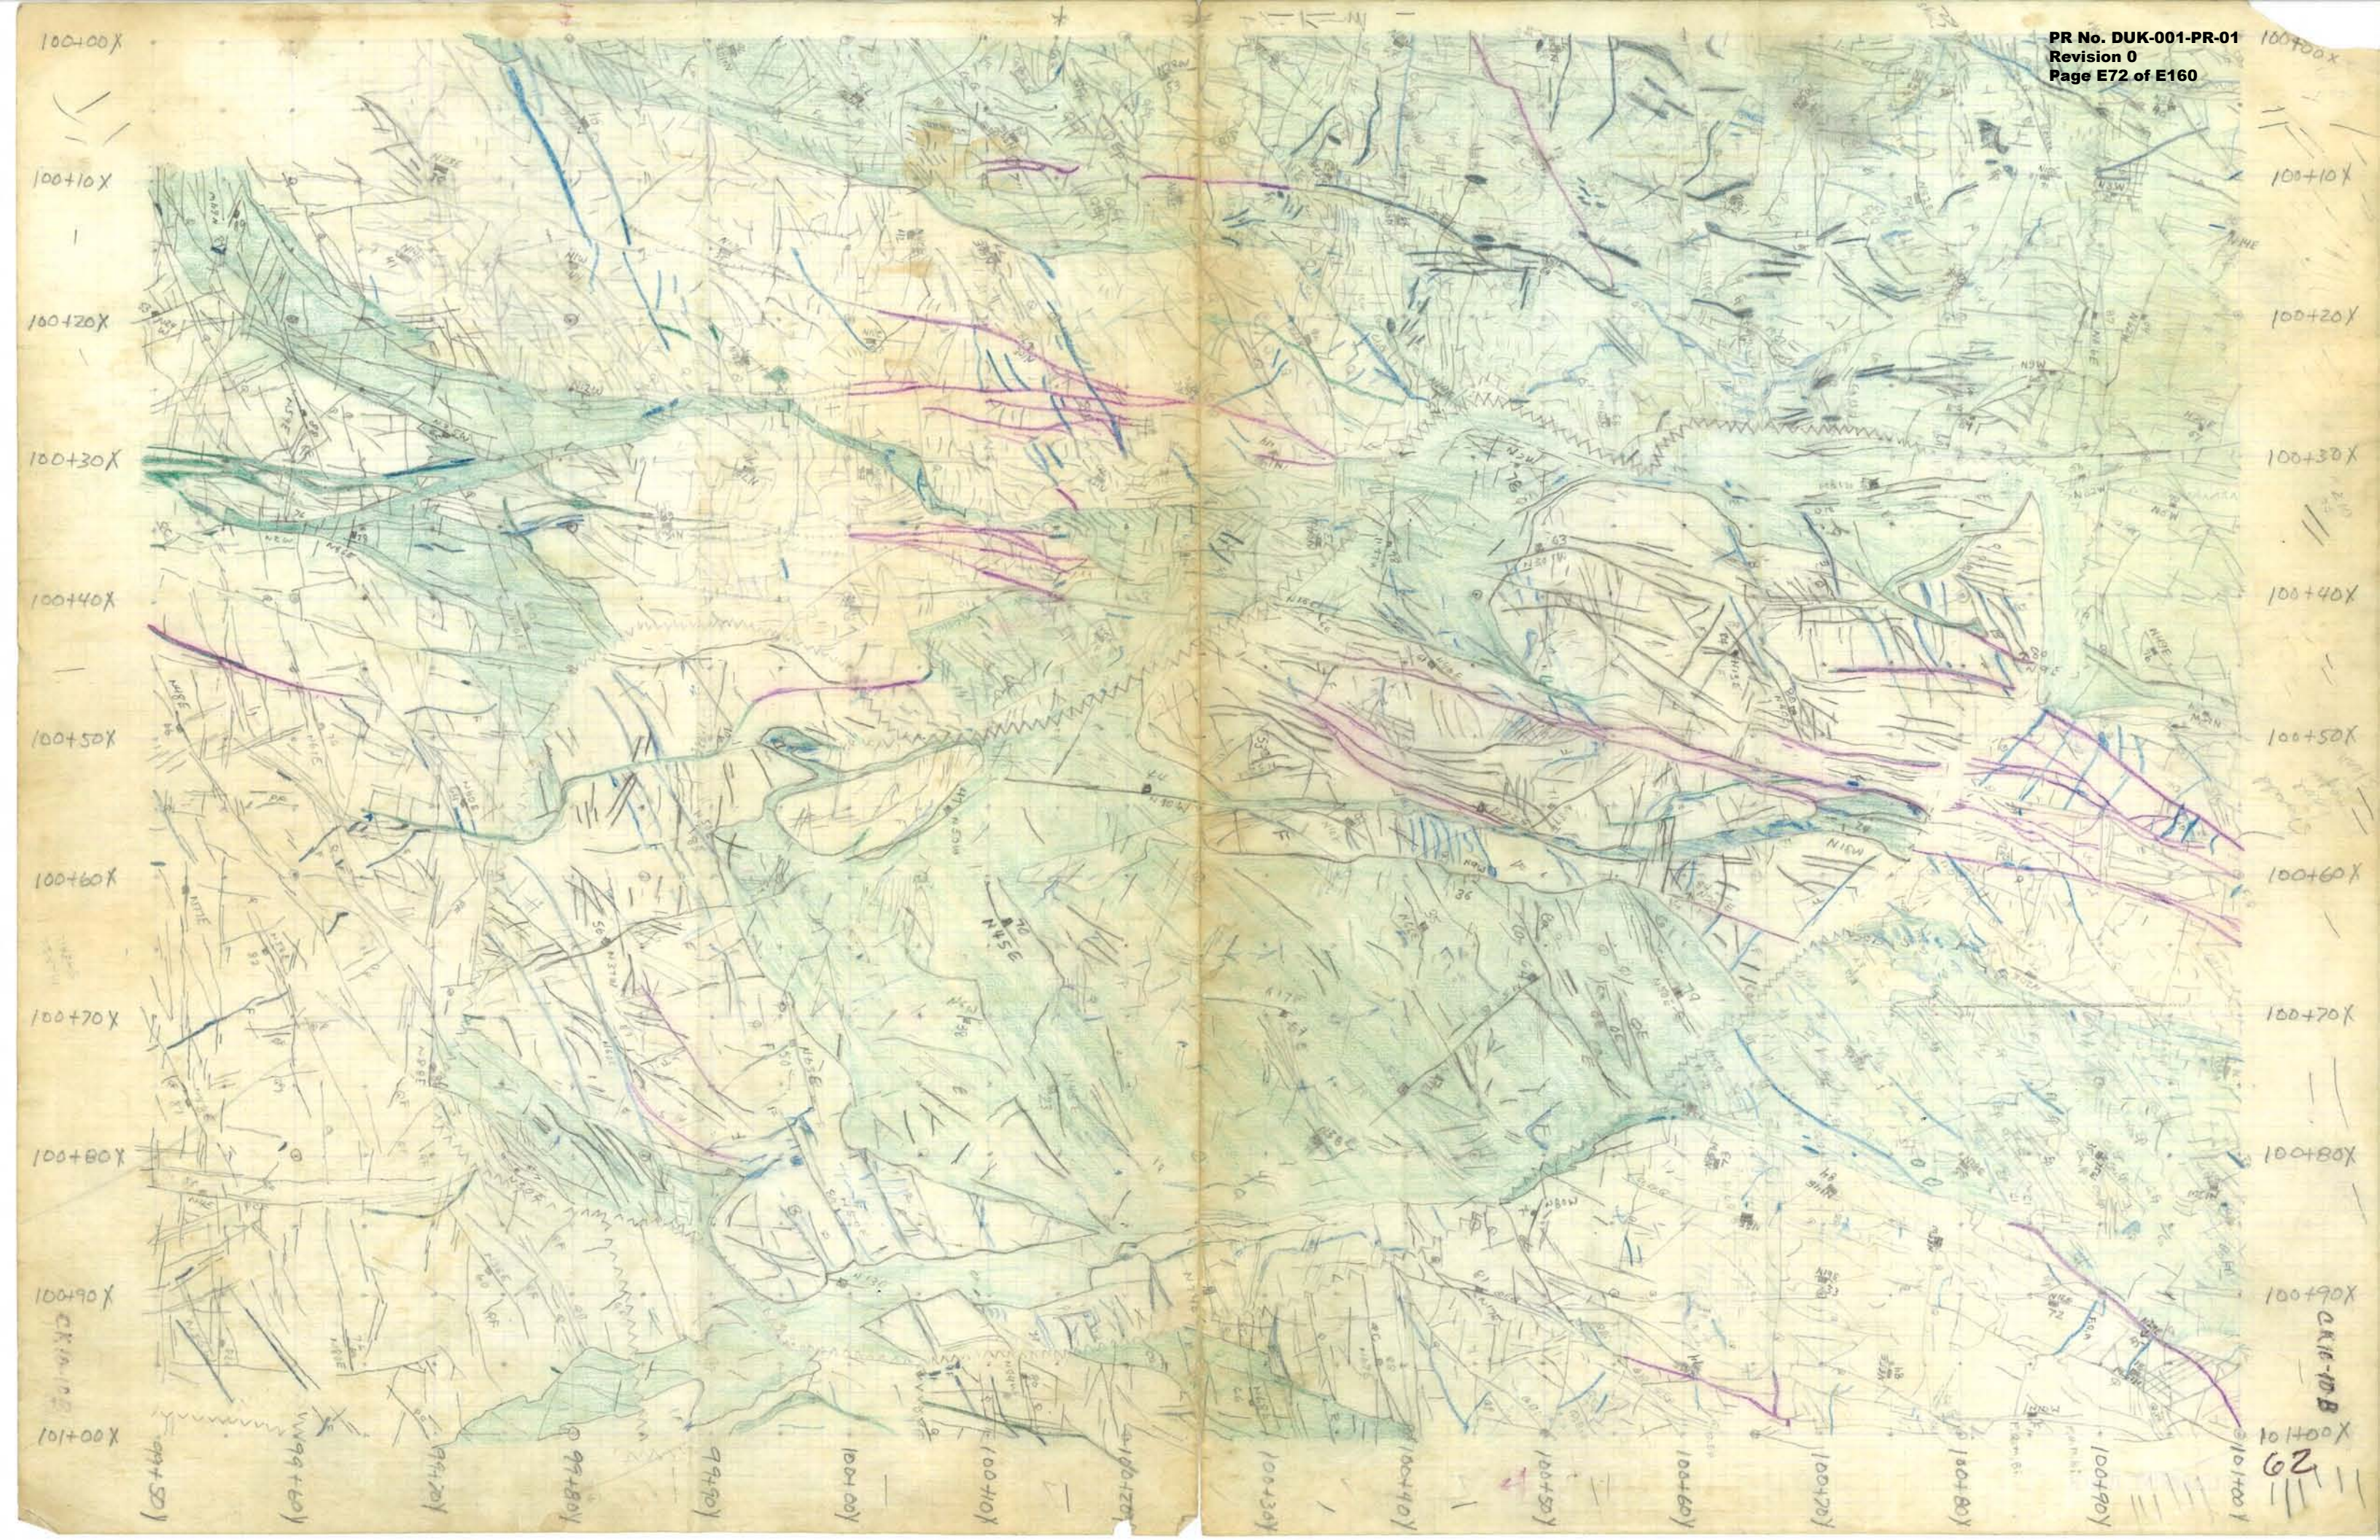

101+00X

101+00X

101+10X

101+10X

101+20X

101+20X

101+30X

101+30X

101+40X

101+40X

101+50X

101+50X

101+60X

101+60X

101+70X

101+70X

101+80X

101+80X

101+90X

101+90X

102+00X

102+00X

95+00Y

95+10Y

95+20Y

95+30Y

95+40Y

95+50Y

95+60Y

95+70Y

95+80Y

95+90Y

96+00Y

96+10Y

96+20Y

96+30Y

96+40Y

96+50Y

69

99+00X

99+00X

99+10X

99+10X

99+20X

99+20X

99+30X

99+30X

99+40X

99+40X

99+50X

99+50X

99+60X

99+60X

99+70X

99+70X

99+80X

99+80X

99+90X

99+90X

100+00X

100+00X

95+00Y
95+10Y
95+20Y
95+30Y
95+40Y
95+50Y
95+60Y
95+70Y
95+80Y
95+90Y
96+00Y
96+10Y
96+20Y
96+30Y
96+40Y
96+50Y

CK10-11D

ATTACHMENT 3

Record Transmittals:

Historical Mapping of the Excavation for Lee Nuclear Site

Historical Construction Photos of Unit 1 Area

Transmitted to FWLA from Duke Energy (March 23, 2007)

Updated Historical Foundation Mapping Documents

Transmitted to FWLA from Duke Energy (June 4, 2010)

*Final Foundation Index Map, Geologic Mapping Procedure, and Supplemental Mapping
Guidance*

Transmittal to FWLA from Duke Energy (November 23, 2010)



1780, 14.3

DUK-010
DUKE LNS COL 1780

PR No. DUK-001-PR-01
Revision 0
Page E76 of E160
Mailing Address:
Mail Code EC05Z
526 South Church Street
Charlotte, NC 28201
704-382-4319
704-382-4545 fax

March 23, 2007

Mr. Robert Falk
ENERCON Services
12850 Middlebrook Rd
Suite 304
Germantown, MD 20874

Subject: Historical Mapping of the Excavation for Lee Nuclear Site
Historical Construction Photos of Unit 1 Area

MF 7/11/07

Dear Bob,

GM

G 5/21/07

Drawings showing the historical mapping of the excavation for Lee Nuclear Station listed below are being transmitted via three DVDs with this letter. Construction photos of the Unit 1 area listed below are also being transmitted via a CD-ROM.

CD 26

CD 27

CD 28

Three DVDs Contain:	
	Folder CK 10-01 (Drwgs 20, 21)
	Folder CK 10-02 (Drwgs 22,23,24,25,26,27,28)
	Folder CK 10-03 (Drwgs 29,30,31,32,33,34)
	Folder CK 10-04 (Drwgs 35,36,37,38)
	Folder CK 10-05 (Drwgs 39,40,41)
	Folder CK 10-06 (Drwgs 42,43,44,45,46,47)
	Folder CK 10-07 (Drwgs 48,49,50,51,52,53,54)
	Folder CK 10-08 (Drwgs 55,56,57,58)
	Folder CK 10-09 (Drwgs 59,60,61)
	Folder CK 10-10 (Drwgs 62,63,64,65,66,67)
	Folder CK 10-11 (Drwgs 68,69,70,71,72,73)
	Folder CK 10-12 (Drwgs 74,75,76)
	Folder CK 10-13 (Drwg 77)
	Folder CK 10-14 (Drwgs 78,79)

CD-ROM Contains:	
Construction Photos	
	No. 436,467,476,485,501,503,504,518,530,544,557,641,653,670, 792,832,833,922,1012,1359,1360

CD 25



If you have any questions, please call me at 704-382-4319.

Sincerely,



Dale M Smith
Civil Engineering Lead

Enclosures: Three DVDs
CD-ROM

Cc: Mike Gray, Lettis (with enclosure)
R. L. Morgan, Jr. (without enclosure)
J. S. Thrasher (without enclosure)
4000.01-09 (without enclosure)

Mailing Address:
P.O. Box 1006 - EC09D
Charlotte, NC 28201-1006

704-382-7830

704-382-2038 fax

Jun. 4, 2010

Mr. Tom Slavonic
Enercon Services
4490 Old William Penn Highway
Murrysville, PA 15668

Subject: Updated Historical Foundation Mapping Documents

Dear Tom:


The attached CD contains updated scans of five historical field documents that were problematic for the foundation mapping work being performed by FWLA. This information supplements and replaces that transmitted by Duke Energy's letter of March 23, 2007 (Dale Smith to Bob Falk) for these five map panels. The five files are identified as shown below.

CD#29

Map Panel Designation	Former File Name	New File Name	File Properties
CK10-07A	49.tif	49 CK10-07A.jpg	Created 6/3/2010 5:32 pm; Size 10,108,309 bytes
CK10-07D	52.tif	52 CK10-07D.jpg	Created 6/3/2010 5:33 pm; Size 7,049,104 bytes
CK10-10B	62.tif	62 CK10-10B.jpg	Created 6/3/2010 5:34 pm; Size 10,205,854 bytes
CK10-11F	69.tif	69 CK10-11F.jpg	Created 6/3/2010 5:35 pm; Size 4,143,323 bytes
CK10-11D	73.tif	73 CK10-11D.jpg	Created 6/3/2010 5:36 pm; Size 6,244,638 bytes

If you have questions, please call me at 704-382-7830.

Sincerely,

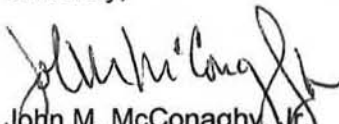

John M. McConaghy, Jr.
Engineering Consultant

Enclosure: 1 CD as described

cc: Mike Gray, FWLA (w/ enclosure)
R.L. Morgan (w/o enclosure)
J.S. Thrasher (w/o enclosure)
J.R. Cassidy (w/o enclosure)
4000.01-09 (w/ enclosure)



November 23, 2010

Mr. Tom Slavonic
Enercon Services
4490 Old William Penn Highway
Murrysville, PA 15668

Subject: Final Foundation Index Map, Geologic Mapping Procedure, and
Supplemental Mapping Guidance

Dear Tom:

After our recent teleconference on qualification of Cherokee legacy geologic mapping documentation, Adam Wade pointed out that FWLA still needed to receive controlled distribution of several documents, including the Final Foundation Index Map, and the geologic mapping procedures, as well as input on those procedures from Dr. Hatcher. The attached CD contains these documents, as retrieved from several sources.

The files whose file name includes a Duke microfilm reel number were obtained from scans of microfilm records from Duke archives, and can be identified by the reel and frame number stenciled at the left of each page. The document whose name contains "MFS CK1108.00" was retrieved from Malcolm Schaeffer's Cherokee correspondence files that are now maintained as part of the Lee project documentation. The documents containing "LETCo" in the filename were retrieved from the Law Engineering Cherokee files at MACTEC.

Comparison of the Duke and Law versions of the Geologic Mapping procedure give high confidence that the content of the two is the same, and reflects the procedures used in the field.

The Duke archive microfilm record contains only the first page of Dr. Hatcher's letter, but it is the same as the first page of Mr. Schaeffer's complete (two-page) document. Comparing Mr. Schaeffer's CK1108.00 complete Hatcher document to the comparable document from Law, one can confirm that the content is the same.

The CK1108.00 version and the Law version of the Hatcher letter differ in some cosmetic ways such as pagination. I believe this can be explained by recalling that in 1977, such letters were produced on a typewriter, and a letter to two different companies would normally have two originals typed. It is not unreasonable to expect that a 1977 typist may have created different page breaks for the two letters, while maintaining the same content.


Mr. Tom Slavonic
November 23, 2010
Page 2 of 2

The Final Foundation Index map is easily identified by its file name. The files are identified as shown in the listing below.

File Name	File Properties	
	Created	Size (Bytes)
1976-1130 Geologic Mapping Procedure, Pearce to Sams (From Duke Microfilm Reel 3184).pdf	11/22/2010 05:31 PM	808,352
1976-1130 Geologic Mapping Procedure, Pearce to Sams (From LETCo Cherokee Files).pdf	11/22/2010 05:32 PM	1,975,820
1977-0422 Geo Mapping Letter, Hatcher to Sams and Pearce (From Duke MFS CK1108.00).pdf	11/22/2010 05:34 PM	517,068
1977-0422 Geo Mapping Letter, Hatcher to Sams and Pearce (From Duke Microfilm Reel 3184).pdf	11/22/2010 05:34 PM	85,621
1977-0422 Geo Mapping Letter, Hatcher to Sams and Pearce (From LETCo Cherokee Files).pdf	11/22/2010 05:35 PM	341,589
Final Foundation Index Map (AKA Binder2 2).pdf	10/09/2006 09:27 AM	30,201,242

If you have questions, please call me at 704-382-7830.

Sincerely,



John M. McConaghy, Jr.
Engineering Consultant

Enclosure: 1 CD as described

cc: Mike Gray, FWLA (w/ enclosure)
Malcolm Schaeffer, HDR|DTA (w/ enclosure)
R.L. Morgan (w/o enclosure)
J.S. Thrasher (w/o enclosure)
J.R. Cassidy (w/o enclosure)
4000.01-09 (w/ enclosure)

ATTACHMENT 4

Duke Power Company Mapping Procedures and Addendum

Duke Power Company
Project 81
Cherokee Nuclear Station
Geologic Mapping Procedure
(November 30, 1976)

Transmitted to Law Engineering Testing Co. from Duke Power Company
[Duke File Name:1976-1130 Geologic Mapping Procedure, Pearce to Sams
(From Duke Microfilm Reel 3184).pdf]

VITAL NOTES

0031840460

Dear Mr. Sams:

Attached is a copy of the procedure we propose to use for geologic mapping at Cherokee for your review. Please plan to meet with us at the Electric Center on Monday, December 13, 1976, at 2:00 p.m. to discuss our overall mapping program at Cherokee and Law Engineering's role in that program. We can discuss any comments you might have on the procedure at that time.

Yours very truly,

**L. C. Dall, Chief Engineer
Civil/Environmental Division**

By: I. W. Pearce, Principal Engineer

fHP/gc

Attachment

cc: C. Q. Reeves
D. R. Privett
M. F. Schaeffer

[illegible]

Geologic Mapping Procedure
Outline

SECTION I - GENERAL DESCRIPTION

- A. Purpose
- B. Scope of Mapping and Sequence
- C. Definition of Responsible Parties
- 1) Responsible Engineer
 - 2) Geologist
 - 3) Field Engineer
 - 4) Consultant
 - 5) Independent Geologic Consultant
- D. Assignment of Responsibilities
- 1) Geologist
 - 2) Field Engineer
 - 3) Consultant
 - 4) Independent Geologic Consultant
- E. Requirements for Mapping
- 1) Phase I - Initial Mapping
 - 2) Phase II - Final Excavation Mapping

SECTION II - TECHNICAL ASPECTS OF MAPPING

SECTION III - INVESTIGATING AND DOCUMENTING GEOLOGIC FAULT FEATURES

0 0 3 1 8 4 0 4 6 1

DUKE POWER COMPANY
PROJECT 81
CHEROKEE NUCLEAR STATION
GEOLOGIC MAPPING PROCEDURE

ATTACHMENT

Section I - General Description

A. PURPOSE

The purpose of the geologic mapping program for Cherokee Station is to provide a permanent record of the foundation conditions encountered in areas of safety-related structures as outlined in PSAR Section 2.5.1.2(9). This Section of the procedure outlines the relationship of responsibilities and activities between Design Engineering and Construction Departments, and the Consultants in the following areas:

- Scope of Mapping and Sequence
- Definition of Parties
- Assignment of Responsibilities
- Requirements for Mapping

B. SCOPE OF MAPPING AND SEQUENCE

The geologic mapping required by this procedure shall be performed for certain designated areas including the following major plant structures:

- (1) Power Block Area - (Reactor Building, Auxiliary Building and Turbine Building Complex)
- (2) Nuclear Service Water Pond Dam foundation
- (3) NSW Pond Spillway Control Section foundation
- (4) NSW Pump Structure foundations

The complete program of geologic mapping shall be sequenced in two basic phases depending on the extent of excavation progress.

Phase I - Scale 1"=20' - Mapping of the top of rock before blasting is started in power block area only. Detailed mapping at 1"=5' where necessary.

Phase II - Scale 1"=10' - Mapping of final excavated surfaces. Detailed mapping at 1"=5' where necessary.

When the final foundation grade is above top of rock, no Phase I mapping will be necessary. Scale for final mapping in saprolite shall not be less than 1"=20'.

0 3 1 8 4 0 4 6 2

CK 110800

C. DEFINITION OF RESPONSIBLE PARTIES

- (1) Responsible Engineer - The Principal Engineer in charge of the responsible Civil Projects Section in the Civil/Environmental Division of Design Engineering Department or his designated representative.
- (2) Geologist - The individual designated by Chief Engineer of Civil/Environmental Division to act as his field representative in any matters pertaining to geologic mapping.
- (3) Field Engineer - The specific individual designated by the Construction Department Project Manager to be responsible for the coordination of all construction support or activities required for carrying out the geologic mapping program.
- (4) Consultant - The person or persons assigned by Law Engineering and Testing Co. (LETCo) with sufficient training and experience to assist with field mapping work and review of drawings and reports when requested by the Geologist or Responsible Engineer.
- (5) Independent Geologic Consultant - A third-party consultant (or consultants) with recognized expertise in the geology of the area engaged specifically for this work. This consultant will provide independent review of fault features and supporting data and conclusions where NRC notification is required for non-similar features as defined in Section III.

D. ASSIGNMENT OF RESPONSIBILITIES

All parties involved in the geologic mapping program will have general overall responsibilities to jointly support the requirement of the mapping program, to pursue their respective assignments in a timely and professional manner, and to assure that the resulting maps, data, reports, and documents are sufficient in content and accuracy to accomplish the purpose intended. The specific scope of responsibility for each of the parties for field mapping work is outlined below:

- (1) Geologist -
 - a. Supervises and coordinates all field geologic activity involved in mapping.
 - b. Schedules mapping of prepared areas designated by the Field Engineer and coordinates required construction support with Field Engineer. Provides Field Engineer with estimate of time required for mapping in specific areas.

0 3 1 8 4 0 4 6 3

- c. Determines the need for and extent of support necessary from Consultant (LETCO) and schedules personnel required for mapping.
- d. Schedules and supervises as necessary all office drafting associated with preparation of geologic maps.
- e. Coordinates review of field and office work, including preparation and review of reports, with Consultant (LETCO).
- f. Schedules and coordinates site visits of Independent Geologic Consultant when visits are required.
- g. Releases investigated areas to Field Engineer after completion of geologic mapping.
- h. When designated, represents Design Engineering during NRC site visits and inspections regarding geologic matters.

(2) Field Engineer -

- a. Schedules availability of areas to be mapped and assures that specific areas are cleaned and maintained until mapping is complete.
- b. Coordinates earthwork operations in areas requiring mapping with Geologist and advises when areas are ready for mapping.
- c. Schedules and coordinates labor, equipment, survey support, and other construction resources as necessary to assure that mapping can be completed as soon as possible.

(3) Consultant (LETCO) -

- a. Provides geologist personnel support for assistance in mapping when requested by the Geologist and/or the Responsible Engineer.
- b. Reviews all maps, drawings, data and reports relating to geology and foundation conditions and offers comments and suggestions as requested by the Geologist and/or the Responsible Engineer.
- c. Provides other specialized assistance in personnel or services if requested by the Geologist and/or the Responsible Engineer.

(4) Independent Geologic Consultant -

- a. Shall provide inspection, review and opinions pertaining to data developed for special features in consultation with Duke and Consultant (LETCO) when requested by the Geologist and/or the Responsible Engineer.

CK 1100-00

- b. May provide other services as may be necessary if requested by the Responsible Engineer.

E. REQUIREMENTS FOR MAPPING

Phase I - Initial Mapping (Top of Rock)

During early construction on the site, the Geologist will monitor the overall earthmoving activities and will record in a Geologic Field Log and by use of photographs any significant observable geologic features in the areas to be mapped. At an appropriate time before rock excavation begins, the Field Engineer will notify the Geologist when an area will be ready for inspection and mapping. The Field Engineer will coordinate the necessary construction resources to prepare the area for mapping.

Excavated areas will be mapped at elevations where earth and rock materials can no longer be removed with earthmoving equipment and blasting is required for further excavation. Preparation of an area for mapping will normally consist of a general clean-up of loose surface materials and gentle sloping of surfaces, where practicable. Limited portions of the area may have to be cleaned more thoroughly by air or water hoses, etc., to permit more detailed mapping, if features requiring detail study are found.

For areas scheduled to be mapped, the Geologist will schedule appropriate Duke Personnel and LETCO personnel, if required, to carry out the mapping in that area. In areas of exposed rock the Field Engineer will coordinate with survey crews to establish a 20 ft. grid reference system. The grid shall be plainly visible and shall be capable of being easily photographed. Iridescent type paint may be used for marking the grid and elevations shall be determined on certain grid points as requested by the Geologist to assist in map work. A 5 ft. grid may be required in some areas if determined necessary by the Geologist.

If the area to be mapped contains sloped surfaces, at greater than 30° angle from horizontal, or nearly vertical walls, the Geologist may request the Field Engineer to have the slope marked off in grids on the slope area. The Field Engineer shall also schedule and provide appropriate construction equipment or safety-ropes, etc., to allow taking of structural readings on steep slopes as requested by the Geologist. When all mapping of an

0031840465

area has been completed, the Geologist will release the area to the Field Engineer for subsequent excavation.

Phase II - Final Excavation Mapping

As the excavation of an area to be mapped nears final grade, the Field Engineer will advise the Geologist of the expected date when excavation and cleanup of the area will be complete and available for mapping. The Geologist will then determine the expected mapping completion date based on his estimate of required work for the area.

The area shall be mapped as soon as practicable after it is cleaned. Various special equipment and methods may have to be employed by the Field Engineer to maintain a mappable surface. Normally, visible 10 ft. grid reference points will be provided by the Field Engineer for Phase II mapping. The Geologist shall coordinate the mapping with the Field Engineer so that priority can be placed on any critical portions of an area.

When final mapping has been completed in the area, the Geologist will release that area to the Field Engineer for construction.

0031840466

CK 1108.00

Section II - Technical Mapping Aspects

Geologic features shall be mapped at the top of rock, or Phase I mapping stage, at a scale of 1"=20' on base maps. Any detail mapping of features shall be at a scale of 1"=5'. Photographs reproduced to an appropriate scale may be used as permanent record and for checking field mapping as determined necessary by the Geologist.

In the final Phase II foundation mapping stage, structural data will be taken concurrently with the mapping effort whenever deemed necessary by the field Geologist. Density of structural readings in the powerhouse excavation should be about 2 readings per 10 ft. grid square or as many as deemed necessary by the Geologist to get a representative sample of the geologic features. The data should include measurements of the following types of geologic occurrences, where applicable:

foliation - type, strike, dip, weathering

joints - spacing, continuity, separation, roughness fill material,
strike, dip

shear planes

and faults - brecciation, offsets, strike, dip

contacts - rock types, weathering

As determined by the field Geologist, sufficient samples should be selected for study in thin section. The thin section data obtained should be keyed into the mapping and compared with thin section data obtained during previous studies in the area. For fault features, additional thin sections and other data may be required.

An appropriate index system shall be established to reference samples, features, and data to physical locations in the mapped areas. The system shall be suitable for cross-referencing and grouping of similar and non-similar features.

In addition, any potential problem features that may have engineering significance and will affect structure design or construction due to joints, shear zones or weathered condition of rock should be reported to the Responsible Engineer.

Section III - Investigating and Documenting Geologic Fault FeaturesA. INTRODUCTION

Extensive studies of fault features characteristic of the region and of the project site area have been made at the Catawba Nuclear Station (Docket Nos. 50-413 and -414) during geologic mapping and at the Cherokee project site in support of the Preliminary Safety Analysis Report for project licensing. These studies⁽¹⁾ establish that numerous fault features occur and can be anticipated in any large excavation in the region.

B. PURPOSE

The purpose of this section is to establish a procedure for investigating and documenting geological fault features. The fault investigation will utilize data from previous studies where applicable.

C. SCOPE

This Investigation relates directly to those geologic fault features occurring in excavations required for safety related structure foundations.

D. PROCEDURE

1. Geologic mapping will be conducted as stated in Cherokee PSAR Section 2.5.1.2(9) and Section IE and Section II of this Procedure.
2. In the event a feature as described below is discovered the (field) Geologist will promptly notify the Responsible Engineer. Features which are reportable to Responsible Engineer may include brecciated zones containing offsets and any other offsets or displaced feature of tectonic origin.
3. The Responsible Engineer will hold any structure construction in an area containing a feature as described in 2 above until a determination

(1) Reference: Catawba Nuclear Station - PSAR, Chapter 2, Section 2.5, Appendices 2C and 2E
 - "Final Geological Report on Brecciated Zones"
 Cherokee Nuclear Station - PSAR, Chapter 2, Section 2.5, Appendices 2C and 2E

can be made 1) that the feature is similar to features previously studied by observation and that its relevant characteristics can be determined by correlation to previously studied features or (2) that the feature is not similar to any previously studied feature and requires new investigation.

4. For similar features (described in item 3(1)), the Geologist will so notify the Responsible Engineer who will release work in the area as soon as the Geologist has indexed the feature, documented it by detailed mapping and photographs, and established the feature's similarity to a previously established feature. This similarity will be documented by comparing relevant characteristics to features observed and studied at Catawba Nuclear Station during mapping or in any of the numerous test pits opened at the Cherokee site during subsurface investigative studies. Where this similarity can be established and documented, mapping and project work will continue routinely. A tabular summary will be prepared which indexes each occurrence of a feature and makes specific comparison to a previously studied feature. Documentation will be subject to audit during field inspections by NRC.
5. For features where similarity cannot be established by comparison to features previously studied at the Cherokee or Catawba sites, the Responsible Engineer will continue to hold work in the area and notify the NRC Project Manager of the discovery. The geologic feature will then be left exposed for ten (10) days for NRC inspection.
- 5a. Duke with the assistance of Law Engineering Testing Company and/or other consultant will map the feature, develop data, and determine if the feature falls in the sequence of geologic events established and reported in the Cherokee PSAR.
- 5b. A third party, independent geologic consultant, will be engaged and will visit the site to examine the feature and examine the data developed by Duke and LETCo and/or other consultant. The Geologist will notify the Responsible Engineer (when geologic mapping, photography and field data gathering have been completed) that investigations have been completed and documented. The independent consultant will report his findings to the Responsible Engineer.

CK 1108-00

5c. If the independent geologic consultant concurs with Duke's conclusions, the Responsible Engineer will then release the area for project construction activity upon completion of item 5b.

5d. For non-similar features a report will be prepared which shall consist of the following:

- (1) Description of the feature including the investigation and description of data obtained
- (2) Geologic history
- (3) Summary and conclusions
- (4) Geologic maps and photographs
- (5) Report of findings by Geologic Consultant
- (6) This report and other data will be available for NRC review whenever requested.

0031840470

Addendum to Mapping Procedures

(April 22, 1977)

Transmitted to Law Engineering Company and
Duke Power Company from Clemson University

[Duke File Name:1977-0422 Geo Mapping Letter, Hatcher to Sams and
Pearce (From Duke Microfilm Reel 3184).pdf]

APRIL 22, 1977

CK 1108.00

Mr. I. W. Pearce
Principal Engineer
Civil-Environmental Division
Duke Power Company
P. O. Box 2178
Charlotte, NC 28242

and

Mr. C. E. Sams
Assistant Vice-President
Law Engineering Testing Company
P. O. Box 11297
Charlotte, NC 28209

Dear Sirs:

A meeting was held April 13, 1977, at Cherokee Nuclear Station for the purpose of examining bedrock features in the cleaned area in the Number 1 Turbine Building. Present at the meeting were Malcomb N. Schaeffer, Duke Power Company, Neil J. Gilbert, Law Engineering Testing Company and myself.

The meeting began with a preliminary briefing by Malcomb Schaeffer over lunch. We arrived at the site at about 1:00 PM and joined N. J. Gilbert on the cleaned area in Number 1 Turbine Building. We examined bedrock lithologies and structures and studied the 1" = 20' geologic maps prepared of the cleaned area.

After the examination of bedrock features on the site we returned to the construction site office to discuss the nature of the geologic mapping and more specifically the problems related to 1" = 5' scale mapping and what should be mapped.

The following recommendations were formulated as a result of these discussions:

1. Mapping of features at 1" = 5' scale.

- (a) There should be a minimum of 2 feet offset on a fault. This is the threshold of visibility of offset at the 1" = 20' scale.

and/or

- (b) There should be 50 feet traceable length on a fault. This is again related to a significant threshold of prominence of a structural feature on a 1" = 20' scale map.

and/or

- (c) Cataclastic zones of significant thickness. A minimum thickness of 1 foot is arbitrarily chosen.

Corollary to the above:

Combinations of greater offset with less traceable length and/or thicker

0 3 1 8 4 0 6 2 7

Addendum to Mapping Procedures

(April 22, 1977)

Transmitted to Law Engineering Company and
Duke Power Company from Clemson University

[Duke File Name: 1977-0422 Geo Mapping Letter, Hatcher to Sams and
Pearce (From Duke MFS CK1108.00).pdf]

Mr. I. W. Pearce
Principal Engineer
Civil-Environmental Division
Duke Power Company
P. O. Box 2178
Charlotte, NC 28242

and

Mr. C. E. Sams
Assistant Vice-President
Law Engineering Testing Company
P. O. Box 11297
Charlotte, NC 28209

Dear Sirs:

A meeting was held April 13, 1977, at Cherokee Nuclear Station for the purpose of examining bedrock features in the cleaned area in the Number 1 Turbine Building. Present at the meeting were Malcomb N. Schaeffer, Duke Power Company, Neil J. Gilbert, Law Engineering Testing Company and myself.

The meeting began with a preliminary briefing by Malcomb Schaeffer over lunch. We arrived at the site at about 1:00 PM and joined N. J. Gilbert on the cleaned area in Number 1 Turbine Building. We examined bedrock lithologies and structures and studied the 1" = 20' geologic maps prepared of the cleaned area.

After the examination of bedrock features on the site we returned to the construction site office to discuss the nature of the geologic mapping and more specifically the problems related to 1" = 5' scale mapping and what should be mapped.

The following recommendations were formulated as a result of these discussions:

1. Mapping of features at 1" = 5' scale.

- (a) There should be a minimum of 2 feet offset on a fault. This is the threshold of visibility of offset at the 1" = 20' scale.

and/or

- (b) There should be 50 feet traceable length on a fault. This is again related to a significant threshold of prominence of a structural feature on a 1" = 20' scale map.

and/or

- (c) Cataclastic zones of significant thickness. A minimum thickness of 1 foot is arbitrarily chosen.

Corollary to the above:

Combinations of greater offset with less traceable length and/or thicker

Mr. I. W. Pearce,
Mr. C. E. Sams
April 22, 1977
Page -2-


cataclastic zones may in the Geologist's judgment warrant 1" = 5' scale mapping. Also, greater traceable length and lesser offset may likewise require 1" = 5' scale mapping.

2. Repetitious sampling of features otherwise established as similar during the initial phases of the top of rock mapping program should not be undertaken. However, samples should be taken at the discretion of the Geologist.

We returned to the site at 5:25 P.M. after the above recommendations were formulated and examined a fault previously not seen by the Independent Geologic Consultant. The above recommendations were applied to this fault and appeared to work well.

The meeting was adjourned at 6:00 P.M.

Sincerely,

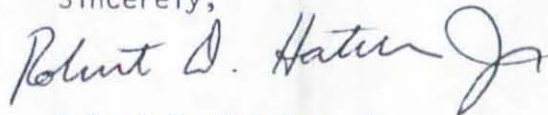

Robert D. Hatcher, Jr.
Professor of Geology
Clemson University
Clemson, SC 29631

RDH:sr

cc: Dr. Donald T. Secor, Jr.

Duke Power Company
Project 81
Cherokee Nuclear Station
Geologic Mapping Procedure
(November 30, 1976)

Transmitted to Law Engineering Testing Co. from Duke Power Company
[Duke File Name:1976-1130 Geologic Mapping Procedure, Pearce to Sams
(From LETCo Cherokee Files).pdf]

DUKE POWER COMPANY

P. O. BOX 2178

GENERAL OFFICES
422 SOUTH CHURCH STREET
CHARLOTTE, N. C. 28201

TELEPHONE: AREA 704
374-4011

November 30, 1976

COPY TO NEIL GILBERT

Mr. C. E. Sams
Law Engineering Testing Co.
P. O. Box 11297
Charlotte, N. C. 28209


RE: Cherokee 1-3
Geologic Mapping
File No: CK-1108.00

Dear Mr. Sams:

15
Wed Attached is a copy of the procedure we propose to use for geologic mapping at Cherokee for your review. Please plan to meet with us at the Electric Center on Monday, December 13, 1976, at 2:00 p.m. to discuss our overall mapping program at Cherokee and Law Engineering's role in that program. We can discuss any comments you might have on the procedure at that time.

Yours very truly,

L. C. Dail, Chief Engineer
Civil/Environmental Division


By: I. W. Pearce, Principal Engineer

IWP/gc

Attachment

cc: C. Q. Reeves
D. R. Privett
M. F. Schaeffer

Geologic Mapping Procedure Outline

SECTION I - GENERAL DESCRIPTION

- A. Purpose
- B. Scope of Mapping and Sequence
- C. Definition of Responsible Parties
 - 1) Responsible Engineer
 - 2) Geologist - MALCOLM SCHAEFFER
 - 3) Field Engineer
 - 4) Consultant
 - 5) Independent Geologic Consultant
- D. Assignment of Responsibilities
 - 1) Geologist
 - 2) Field Engineer
 - 3) Consultant
 - 4) Independent Geologic Consultant
- E. Requirements for Mapping
 - 1) Phase I - Initial Mapping
 - 2) Phase II - Final Excavation Mapping

SECTION II - TECHNICAL ASPECTS OF MAPPING

SECTION III - INVESTIGATING AND DOCUMENTING GEOLOGIC FAULT FEATURES

DUKE POWER COMPANY
PROJECT 81
CHEROKEE NUCLEAR STATION
GEOLOGIC MAPPING PROCEDURE

Section I - General Description

A. PURPOSE

The purpose of the geologic mapping program for Cherokee Station is to provide a permanent record of the foundation conditions encountered in areas of safety-related structures as outlined in PSAR Section 2.5.1.2(9). This Section of the procedure outlines the relationship of responsibilities and activities between Design Engineering and Construction Departments, and the Consultants in the following areas:

- Scope of Mapping and Sequence
- Definition of Parties
- Assignment of Responsibilities
- Requirements for Mapping

B. SCOPE OF MAPPING AND SEQUENCE

The geologic mapping required by this procedure shall be performed for certain designated areas including the following major plant structures:

- (1) Power Block Area - (Reactor Building, Auxiliary Building and Turbine Building Complex)
- (2) Nuclear Service Water Pond Dam foundation
- (3) NSW Pond Spillway Control Section foundation
- (4) NSW Pump Structure foundations

The complete program of geologic mapping shall be sequenced in two basic phases depending on the extent of excavation progress.

Phase I - Scale 1"=20' - Mapping of the top of rock before blasting is started in power block area only. Detailed mapping at 1"=5' where necessary.

Phase II - Scale 1"=10' - Mapping of final excavated surfaces. Detailed mapping at 1"=5' where necessary.

When the final foundation grade is above top of rock, no Phase I mapping will be necessary. Scale for final mapping in saprolite shall not be less than 1"=20'.

C. DEFINITION OF RESPONSIBLE PARTIES

- (1) Responsible Engineer - The Principal Engineer in charge of the responsible Civil Projects Section in the Civil/Environmental Division of Design Engineering Department or his designated representative. I.W. PEARCE
Alternate: CQ Person
- (2) Geologist - The individual designated by Chief Engineer of Civil/Environmental Division to act as his field representative in any matters pertaining to geologic mapping. MALCOLM
- (3) Field Engineer - The specific individual designated by the Construction Department Project Manager to be responsible for the coordination of all construction support or activities required for carrying out the geologic mapping program.
- (4) Consultant - The person or persons assigned by Law Engineering and Testing Co. (LETCo) with sufficient training and experience to assist with field mapping work and review of drawings and reports when requested by the Geologist or Responsible Engineer.
- (5) Independent Geologic Consultant - A third-party consultant (or consultants) with recognized expertise in the geology of the area engaged specifically for this work. This consultant will provide independent review of fault features and supporting data and conclusions where NRC notification is required for non-similar features as defined in Section III. Bob Hatcher

D. ASSIGNMENT OF RESPONSIBILITIES

All parties involved in the geologic mapping program will have general overall responsibilities to jointly support the requirement of the mapping program, to pursue their respective assignments in a timely and professional manner, and to assure that the resulting maps, data, reports, and documents are sufficient in content and accuracy to accomplish the purpose intended. The specific scope of responsibility for each of the parties for field mapping work is outlined below:

- (1) Geologist -
 - a. Supervises and coordinates all field geologic activity involved in mapping.
 - b. Schedules mapping of prepared areas designated by the Field Engineer and coordinates required construction support with Field Engineer. Provides Field Engineer with estimate of time required for mapping in specific areas.

- c. Determines the need for and extent of support necessary from Consultant (LETCO) and schedules personnel required for mapping.
 - d. Schedules and supervises as necessary all office drafting associated with preparation of geologic maps.
 - e. Coordinates review of field and office work, including preparation and review of reports, with Consultant (LETCO).
 - f. Schedules and coordinates site visits of Independent Geologic Consultant when visits are required.
 - g. Releases investigated areas to Field Engineer after completion of geologic mapping.
 - h. When designated, represents Design Engineering during NRC site visits and inspections regarding geologic matters.
- (2) Field Engineer -
- a. Schedules availability of areas to be mapped and assures that specific areas are cleaned and maintained until mapping is complete.
 - b. Coordinates earthwork operations in areas requiring mapping with Geologist and advises when areas are ready for mapping.
 - c. Schedules and coordinates labor, equipment, survey support, and other construction resources as necessary to assure that mapping can be completed as soon as possible.
- (3) Consultant (LETCO) -
- a. Provides geologist personnel support for assistance in mapping when requested by the Geologist and/or the Responsible Engineer.
 - b. Reviews all maps, drawings, data and reports relating to geology and foundation conditions and offers comments and suggestions as requested by the Geologist and/or the Responsible Engineer.
 - c. Provides other specialized assistance in personnel or services if requested by the Geologist and/or the Responsible Engineer.
- (4) Independent Geologic Consultant -
- a. Shall provide inspection, review and opinions pertaining to data developed for special features in consultation with Duke and Consultant (LETCO) when requested by the Geologist and/or the Responsible Engineer.

- b. May provide other services as may be necessary if requested by the Responsible Engineer.

E. REQUIREMENTS FOR MAPPING

Phase I - Initial Mapping (Top of Rock)

During early construction on the site, the Geologist will monitor the overall earthmoving activities and will record in a Geologic Field Log and by use of photographs any significant observable geologic features in the areas to be mapped. At an appropriate time before rock excavation begins, the Field Engineer will notify the Geologist when an area will be ready for inspection and mapping. The Field Engineer will coordinate the necessary construction resources to prepare the area for mapping.

Excavated areas will be mapped at elevations where earth and rock materials can no longer be removed with earthmoving equipment and blasting is required for further excavation. Preparation of an area for mapping will normally consist of a general clean-up of loose surface materials and gentle sloping of surfaces, where practicable. Limited portions of the area may have to be cleaned more thoroughly by air or water hoses, etc., to permit more detailed mapping, if features requiring detail study are found.

For areas scheduled to be mapped, the Geologist will schedule appropriate Duke Personnel and LETCO personnel, if required, to carry out the mapping in that area. In areas of exposed rock the Field Engineer will coordinate with survey crews to establish a 20 ft. grid reference system. The grid shall be plainly visible and shall be capable of being easily photographed. Iridescent type paint may be used for marking the grid and elevations shall be determined on certain grid points as requested by the Geologist to assist in map work. A 5 ft. grid may be required in some areas if determined necessary by the Geologist.

If the area to be mapped contains sloped surfaces, at greater than 30° angle from horizontal, or nearly vertical walls, the Geologist may request the Field Engineer to have the slope marked off in grids on the slope area. The Field Engineer shall also schedule and provide appropriate construction equipment or safety-ropes, etc., to allow taking of structural readings on steep slopes as requested by the Geologist. When all mapping of an

area has been completed, the Geologist will release the area to the Field Engineer for subsequent excavation.

Phase II - Final Excavation Mapping

As the excavation of an area to be mapped nears final grade, the Field Engineer will advise the Geologist of the expected date when excavation and cleanup of the area will be complete and available for mapping. The Geologist will then determine the expected mapping completion date based on his estimate of required work for the area.

The area shall be mapped as soon as practicable after it is cleaned. Various special equipment and methods may have to be employed by the Field Engineer to maintain a mappable surface. Normally, visible 10 ft. grid reference points will be provided by the Field Engineer for Phase II mapping. The Geologist shall coordinate the mapping with the Field Engineer so that priority can be placed on any critical portions of an area.

When final mapping has been completed in the area, the Geologist will release that area to the Field Engineer for construction.

Section II - Technical Mapping Aspects

Geologic features shall be mapped at the top of rock, or Phase I mapping stage, at a scale of 1"=20' on base maps. Any detail mapping of features shall be at a scale of 1"=5'. Photographs reproduced to an appropriate scale may be used as permanent record and for checking field mapping as determined necessary by the Geologist.

In the final Phase II foundation mapping stage, structural data will be taken concurrently with the mapping effort whenever deemed necessary by the field Geologist. Density of structural readings in the powerhouse excavation should be about 2 readings per 10 ft. grid square or as many as deemed necessary by the Geologist to get a representative sample of the geologic features. The data should include measurements of the following types of geologic occurrences, where applicable:

- foliation - type, strike, dip, weathering
- joints - spacing, continuity, separation, roughness fill material,
strike, dip
- shear planes
and faults - brecciation, offsets, strike, dip
- contacts - rock types, weathering

As determined by the field Geologist, sufficient samples should be selected for study in thin section. The thin section data obtained should be keyed into the mapping and compared with thin section data obtained during previous studies in the area. For fault features, additional thin sections and other data may be required.

An appropriate index system shall be established to reference samples, features, and data to physical locations in the mapped areas. The system shall be suitable for cross-referencing and grouping of similar and non-similar features.

In addition, any potential problem features that may have engineering significance and will affect structure design or construction due to joints, shear zones or weathered condition of rock should be reported to the Responsible Engineer.

Section III - Investigating and Documenting Geologic Fault Features

A. INTRODUCTION

Extensive studies of fault features characteristic of the region and of the project site area have been made at the Catawba Nuclear Station (Docket Nos. 50-413 and -414) during geologic mapping and at the Cherokee project site in support of the Preliminary Safety Analysis Report for project licensing. These studies⁽¹⁾ establish that numerous fault features occur and can be anticipated in any large excavation in the region.

B. PURPOSE

The purpose of this section is to establish a procedure for investigating and documenting geological fault features. The fault investigation will utilize data from previous studies where applicable.

C. SCOPE

This Investigation relates directly to those geologic fault features occurring in excavations required for safety related structure foundations.

D. PROCEDURE

1. Geologic mapping will be conducted as stated in Cherokee PSAR Section 2.5.1.2(9) and Section IE and Section II of this Procedure.
2. In the event a feature as described below is discovered the (field) Geologist will promptly notify the Responsible Engineer. Features which are reportable to Responsible Engineer may include brecciated zones containing offsets and any other offsets or displaced feature of tectonic origin.
3. The Responsible Engineer will hold any structure construction in an area containing a feature as described in 2 above until a determination

(1) Reference: Catawba Nuclear Station - PSAR, Chapter 2, Section 2.5, Appendices 2C and 2E
- "Final Geological Report on Brecciated Zones"
Cherokee Nuclear Station - PSAR, Chapter 2, Section 2.5, Appendices 2C and 2E

can be made 1) that the feature is similar to features previously studied by observation and that its relevant characteristics can be determined by correlation to previously studied features or (2) that the feature is not similar to any previously studied feature and requires new investigation.

4. For similar features (described in item 3(1)), the Geologist will so notify the Responsible Engineer who will release work in the area as soon as the Geologist has indexed the feature, documented it by detailed mapping and photographs, and established the feature's similarity to a previously established feature. This similarity will be documented by comparing relevant characteristics to features observed and studied at Catawba Nuclear Station during mapping or in any of the numerous test pits opened at the Cherokee site during subsurface investigative studies. Where this similarity can be established and documented, mapping and project work will continue routinely. A tabular summary will be prepared which indexes each occurrence of a feature and makes specific comparison to a previously studied feature. Documentation will be subject to audit during field inspections by NRC.
5. For features where similarity cannot be established by comparison to features previously studied at the Cherokee or Catawba sites, the Responsible Engineer will continue to hold work in the area and notify the NRC Project Manager of the discovery. The geologic feature will then be left exposed for ten (10) days for NRC inspection.
- 5a. Duke with the assistance of Law Engineering Testing Company and/or other consultant will map the feature, develop data, and determine if the feature falls in the sequence of geologic events established and reported in the Cherokee PSAR.
- 5b. A third party, independent geologic consultant, will be engaged and will visit the site to examine the feature and examine the data developed by Duke and LETCo and/or other consultant. The Geologist will notify the Responsible Engineer (when geologic mapping, photography and field data gathering have been completed) that investigations have been completed and documented. The independent consultant will report his findings to the Responsible Engineer.

5c. If the independent geologic consultant concurs with Duke's conclusions, the Responsible Engineer will then release the area for project construction activity upon completion of item 5b.

5d. For non-similar features a report will be prepared which shall consist of the following:

- (1) Description of the feature including the investigation and description of data obtained
- (2) Geologic history
- (3) Summary and conclusions
- (4) Geologic maps and photographs
- (5) Report of findings by Geologic Consultant
- (6) This report and other data will be available for NRC review whenever requested.

Addendum to Mapping Procedures
(April 22, 1977)

Transmitted to Law Engineering Company and
Duke Power Company from Clemson University

[Duke File Name:1977-0422 Geo Mapping Letter, Hatcher to Sams and
Pearce (From LETCo Cherokee Files).pdf]

Mr. C. E. Sams
Assistant Vice-President
Law Engineering Testing Company
P. O. Box 11297
Charlotte, NC 28209

and

Mr. I. W. Pearce
Principal Engineer
Civil-Environmental Division
Duke Power Company
P. O. Box 2178
Charlotte, NC 28242

Dear Sirs:

A meeting was held April 13, 1977, at Cherokee Nuclear Station for the purpose of examining bedrock features in the cleaned area in the Number 1 Turbine Building. Present at the meeting were Malcomb N. Schaeffer, Duke Power Company, Neil J. Gilbert, Law Engineering Company and myself.

The meeting began with a preliminary briefing by Malcomb Schaeffer over lunch. We arrived at the site at about 1:00 PM and joined N. J. Gilbert on the cleaned area in Number 1 Turbine Building. We examined bedrock lithologies and structures and studied the 1" = 20' geologic maps prepared of the cleaned area.

After the examination of bedrock features on the site we returned to the construction site office to discuss the nature of the geologic mapping and more specifically the problems related to 1" = 5' scale mapping and what should be mapped.

The following recommendations were formulated as a result of these discussions:

1. Mapping of features at 1" = 5' scale.

- (a) There should be a minimum of 2 feet offset on a fault. This is the threshold of visibility of offset at the 1" = 20' scale.

and/or

- (b) There should be 50 feet traceable length on a fault. This is again related to a significant threshold of prominence of a structural feature on a 1" = 20' scale map.

and/or

- (c) Cataclastic zones of significant thickness. A minimum thickness of 1 foot is arbitrarily chosen.

Mr. C. E. Sams
Mr. I. W. Pearce
April 22, 1977
Page -2-

Corollary to the above:


Combinations of greater offset with less traceable length and/or thicker cataclastic zones may in the Geologist's judgment warrant 1" = 5' scale mapping. Also, greater traceable length and lesser offset may likewise require 1" = 5' scale mapping.

2. Repetitious sampling of features otherwise established as similar during the initial phases of the top of rock mapping program should not be undertaken. However, samples should be taken at the discretion of the Geologist.

We returned to the site at 5:25 P.M. after the above recommendations were formulated and examined a fault previously not seen by the Independent Geologic Consultant. The above recommendations were applied to this fault and appeared to work well.

The meeting was adjourned at 6:00 P.M.

Sincerely,

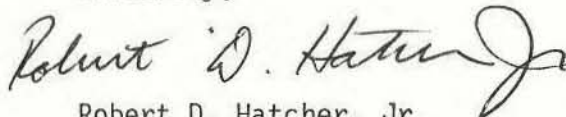

Robert D. Hatcher, Jr.
Professor of Geology
Clemson University
Clemson, SC 29631

RDH:sr

cc: Dr. Donald T. Secor, Jr.

Data Verification Summary

Data Verification Title: Cherokee Nuclear Station Service Building Final Foundation Field Maps (SB1 and SB2)

ID Number: HRQ-FWLA-002

Date of Qualification Review Team Meeting: November 12, 2010

Quality Review Team:

Name	Sign (Initials)	Organization	Qualifications
Jim Cassidy	JRC 1 Dec 2010	Duke Energy	QA/QC Verification
John McConaghy	JMM 30 Nov 10	Duke Energy	Engineering
Juan Vizcaya	JV	Enercon Services Inc.	Engineering
Malcolm Schaeffer	MFS	HDR/DTA	Former Duke Power Project Geologist
Michael Gray	MGG	FWLA	Project Principal Geologist
Adam Wade	AW	FWLA	Project Geologist

Data / Evidence Considered During the Reviews:

The contents of the files outlined in attachment 2 were reviewed for applicability and completeness.

Critical Attributes Considered During the Reviews:

Files comprise the hand drawn field maps, documenting observed foundation level mapping conducted at the former Cherokee Nuclear Station (CNS) Service Building.

Basis for Qualification / Non-Qualification:

The data is qualified to use in WLS evaluations to document final foundation geology beneath former CNS Service Building. The information documented in these files were acquired, prepared, and verified using the applicable specifications and Duke QA procedures governing at the time of gathering and preparation. The CNS Service Building final foundation field geologic maps may be used in corroboration of information.

These field maps will be used, in addition to the CNS Units 1 and 2 maps, as inputs to develop a final foundation map record to support geologic evaluations as part of WLS COLA.

Is the data considered Nuclear Safety Related QA Qualified? Yes (Yes / No)

Recommendations for Additional Qualification Activities:

None

Dissenting conclusions or comments: If the team reaches consensus, enter "None" here. Otherwise, document the dissenting view as follows:

Reviewer Name and Organization: _____

Dissenting Statement: _____ None _____

Signature and Date: _____

I hereby certify this Data Verification Package is complete:

Quality Review Team Lead: *Timothy A. Guy* (Sign) **Date:** 12/02/2010

I approve this Data Verification Package for the usage identified above:

Approved By: *RL Morgan Jr* (Sign) **Date:** 12/02/2010
(Duke Project Manager or designee)

Data Verification Planning Form

Data Verification Title: Cherokee Nuclear Station
Service Building Final Foundation Maps (SB1 and
SB2)

ID Number: HRQ-FWLA-002

Scope of Historical Data Requiring Review:

Two hand drawn field geologic maps at 1"=10' scale of final excavated surface of the Service Building for the Cherokee Nuclear Station (CNS). Mapping was performed during CNS construction from 1977 to 1982. Attachment 1 summarizes the individual field maps to be qualified. Attachment 2 contains .pdf copies of the hand drawn map panels.

Attachment 3 contains a copy of the record transmittal. Attachment 4 contains a copy of the written mapping procedures and addendum for the final excavation mapping program.

Purpose / Applicability of Data: _____

These field maps will be used, in addition to the CNS Units 1 and 2 maps, as inputs to develop a final foundation map record to support geologic evaluations as part of WLS COLA.

Methods of Verification (X):

Peer Review _____ Data Corroboration X Confirmatory Testing _____

Rationale: _____

The field maps generated for this project were produced using approved standards and procedures by Duke Power Company, now Duke-Energy. They represent an in-process product with status as of the time work on the Cherokee project was stopped. A copy of the Duke Power mapping procedure and addendum is provided in Attachment 4. Current-era work will compile information from these field maps to support licensing and construction of Lee Nuclear Station.

Need for Data Qualification Affirmed By: Michael Gray **Date:** 10/15/2010
FWLA Project Manager (or designee)

Required Organizations for Verification:

FWLA with support from Duke-Energy and Enercon.

Duke Approval of Scope and Methods Used: R. Morgan Jr. RL Morgan, Jr. **Date:** 12/02/2010
Duke Project Manager (or designee)

Attachments:

- Attachment 1 Listing of Field Maps to be Qualified
- Attachment 2 CNS Service Building Final Foundation Field Maps SB1 and SB2
- Attachment 3 Record Transmittals
- Attachment 4 Duke Power Company Mapping Procedures and Addendum


ATTACHMENT 1

Listing of Field Maps to be Qualified

Duke Energy Records Designation			CNS Records Designation	CNS Map Phase
Folder Name	File Name	Date of Transmittal	Map Panel Designation	Phase II map 1"=10'
Service Building	122_20101012.JPEG	10/13/2010	SB1	X
	123_20101012.JPEG	10/13/2010	SB2	X

ATTACHMENT 2

CNS Service Building Final Foundation Field Maps (SB1 and SB2)

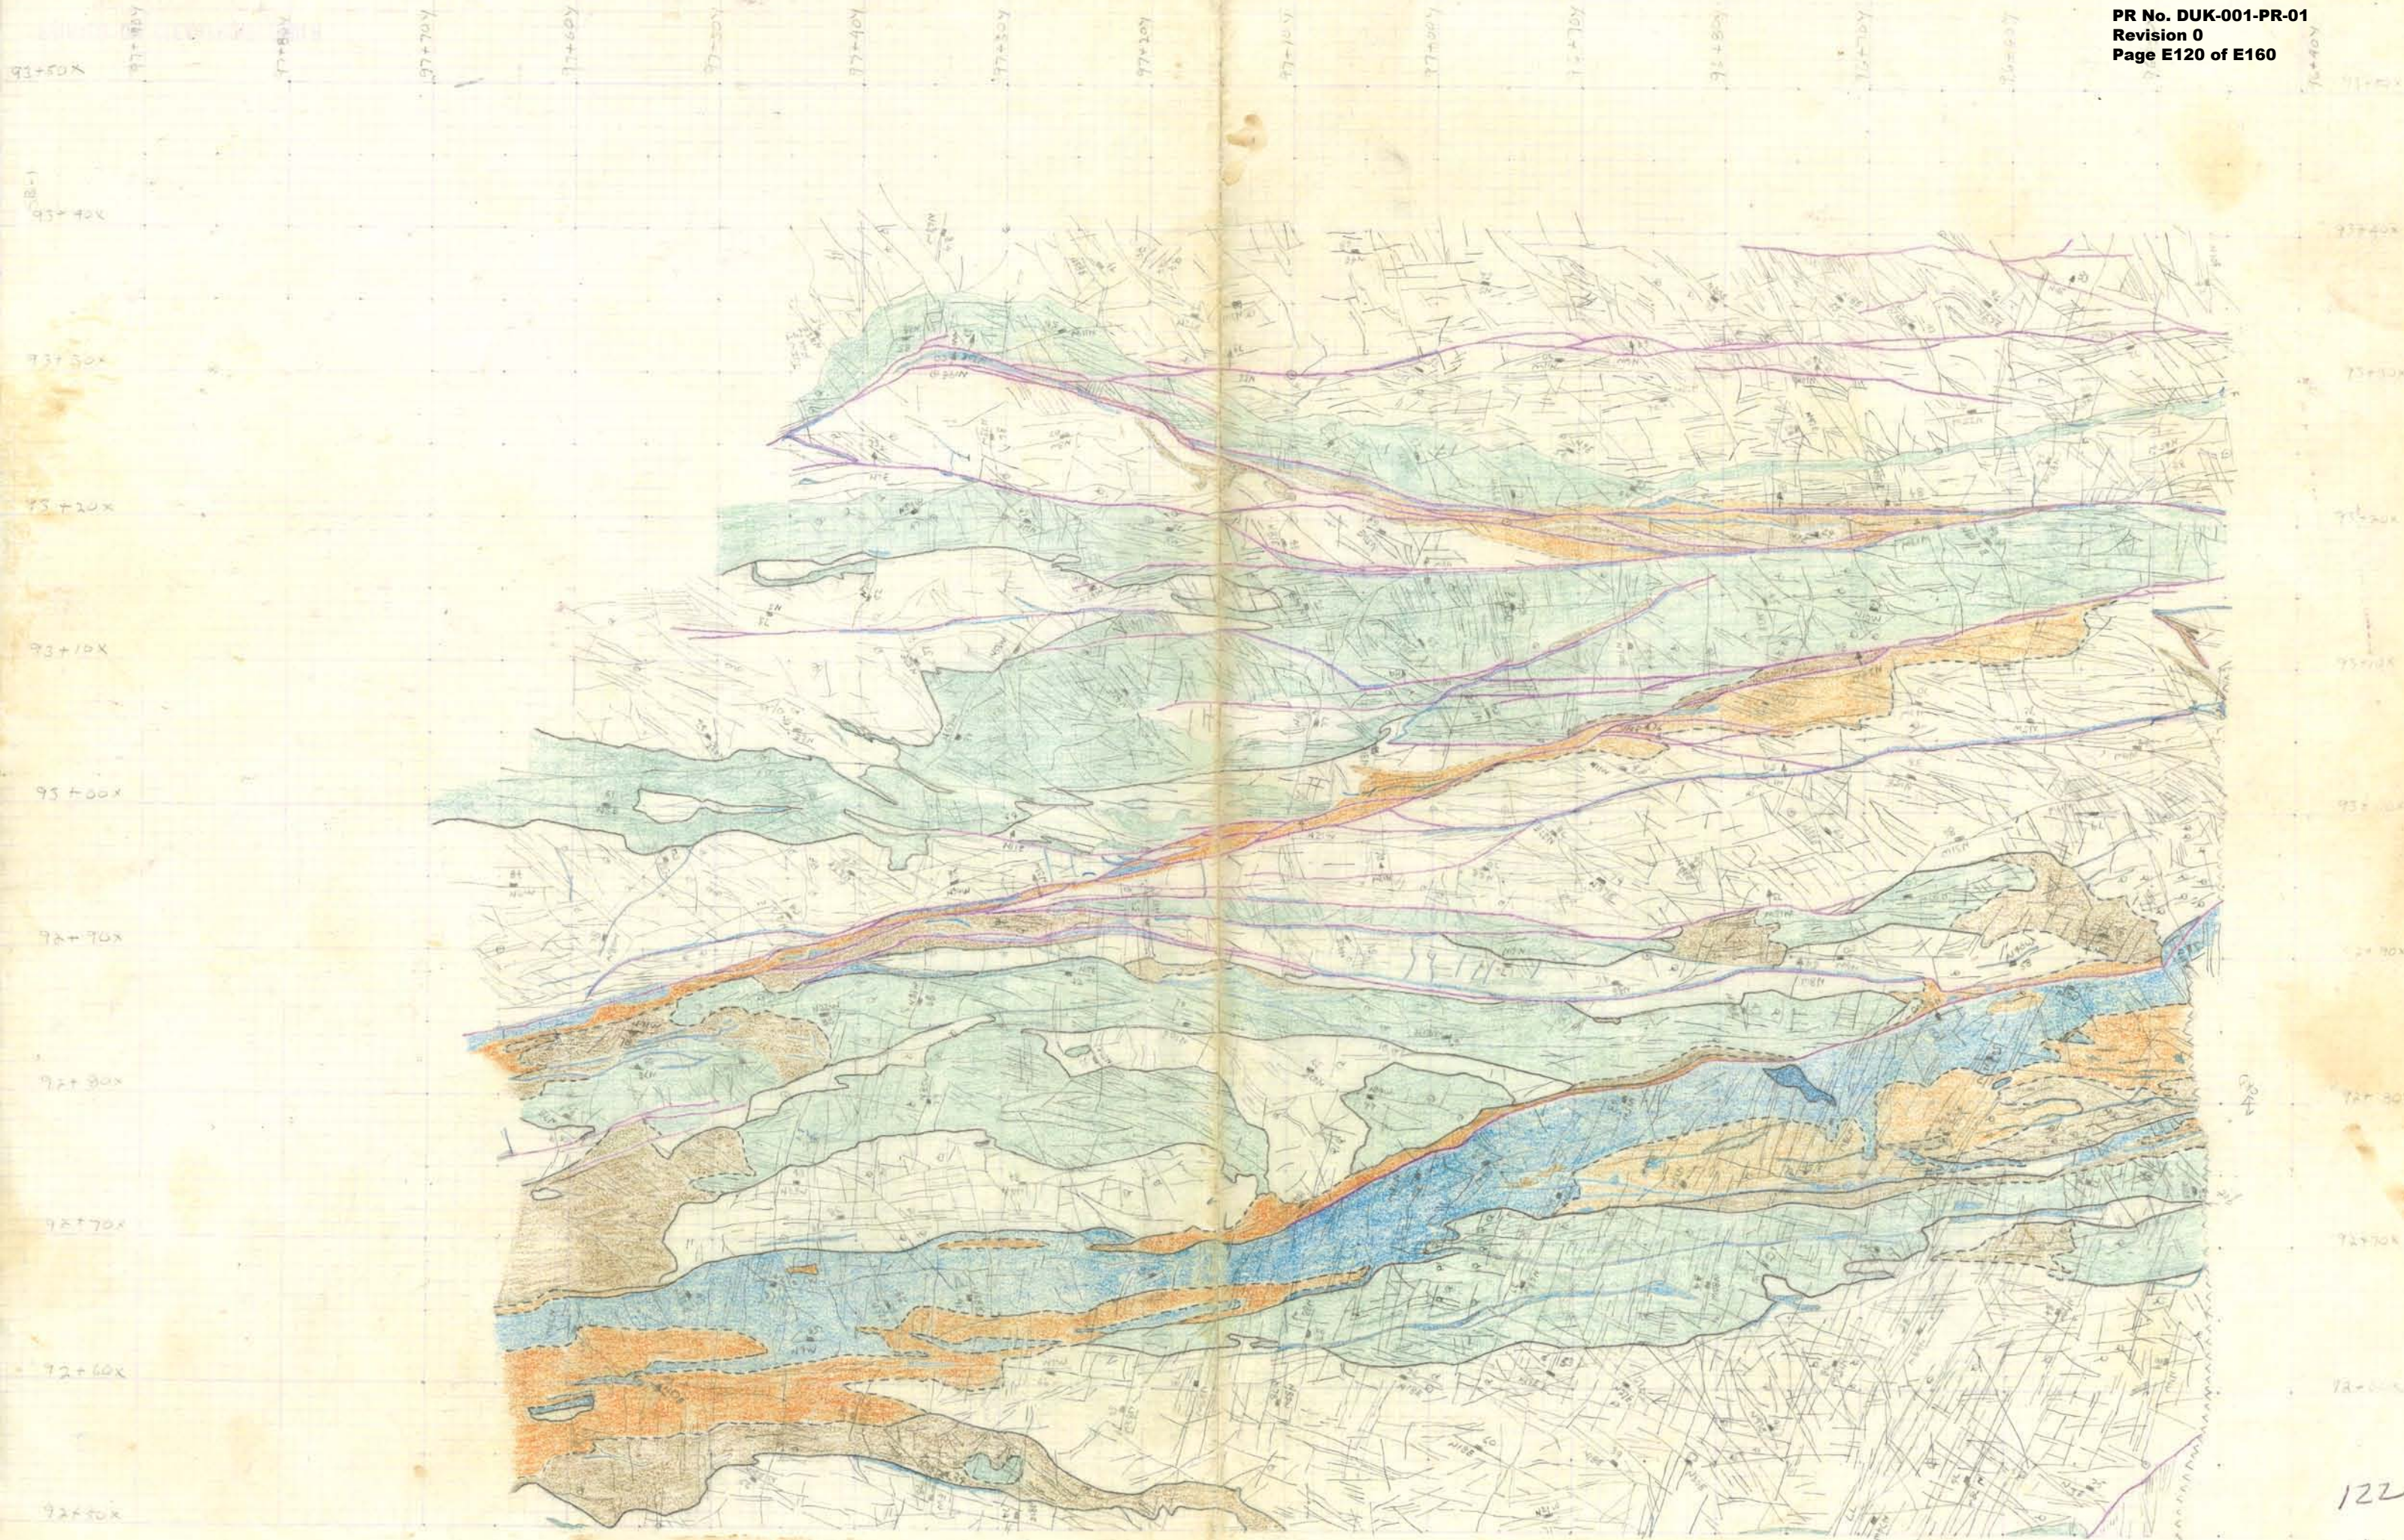

91+60X

91+60X

91+70X

91+70X

91+80X

91+80X

91+90X

91+90X

91+00X

92+00X

92+10X

92+10X

92+20X

92+20X

92+30X


92+30X

92+40X

92+40X

92+50X

92+50X

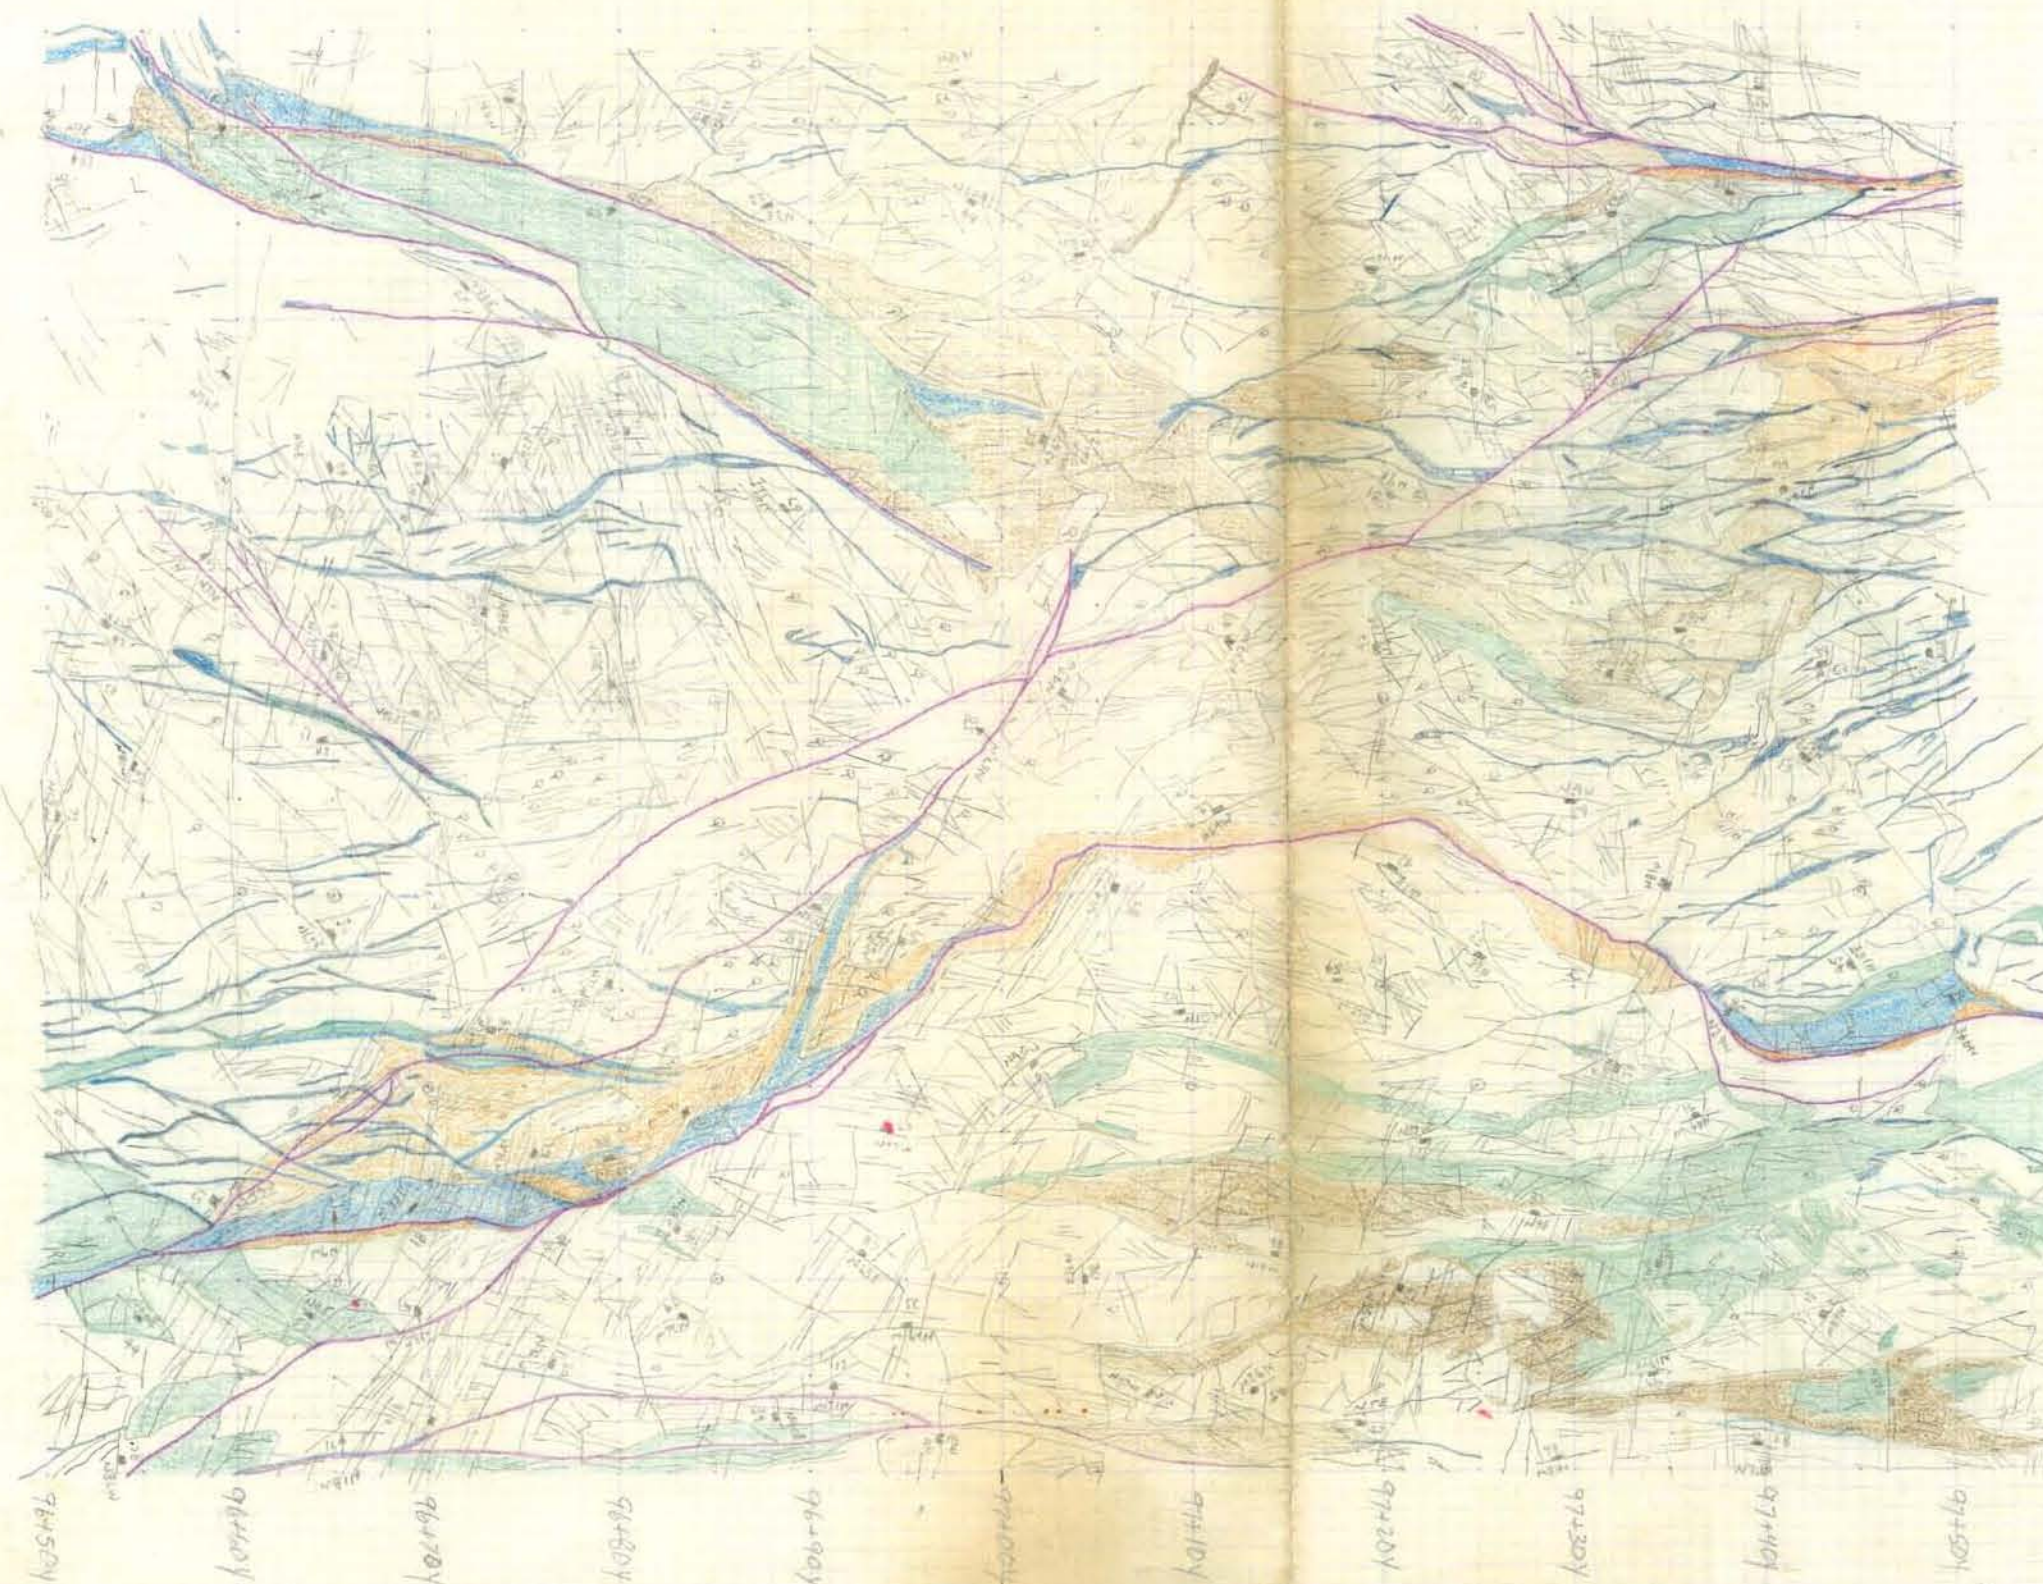

ATTACHMENT 3

Record Transmittals:

Top of Rock Map Panels, Wall Map Panels, and Service Building Foundation Maps
Transmitted to FWLA from Duke Energy (October 13, 2010)

Final Foundation Index Map, Geologic Mapping Procedure, and Supplemental Mapping Guidance
Transmittal to FWLA from Duke Energy (November 23, 2010)



REC'D 10/15/10
MGG

PR No. DUK-001-PR-01
Revision 0
Page 23 of E160
EC09D/ 526 South Church Street
Charlotte, NC 28201-1006

Mailing Address:
P.O. Box 1006 - EC09D
Charlotte, NC 28201-1006

704-382-7830

704-382-2038 fax

October 13, 2010

Mr. Tom Slavonic
Enercon Services
4490 Old William Penn Highway
Murrysville, PA 15668


Subject: Top of Rock Map Panels, Wall Map Panels, and Service Building Foundation Maps

Dear Tom:

During our recent review of surviving Cherokee-era working documents at the Duke offices, Malcolm Schaeffer pointed out the Service Building foundation maps that had been missing during our current mapping project. Malcolm also identified complete sets of Top-of-Rock Map panels, and Wall Map panels. These items have been scanned again consistent with FWLA's needs for the mapping tasks, and the scans are contained on the attached CD. The files are identified as shown in the attached listing.

If you have questions, please call me at 704-382-7830.

Sincerely,

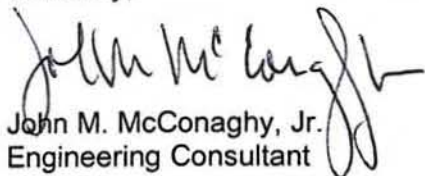

John M. McConaghy, Jr.
Engineering Consultant

Enclosure: 1 CD as described

cc: Mike Gray, FWLA (w/ enclosure)
Malcolm Schaeffer, HDR/DTA (w/ enclosure)
R.L. Morgan (w/o enclosure)
J.S. Thrasher (w/o enclosure)
J.R. Cassidy (w/o enclosure)
4000.01-09 (w/ enclosure)

Mr. Tom Slavonic
October 13, 2010
Page 2 of 3

Listing of CD Folders and Files (sheet 1 of 2)

Volume in drive D is TopRock WallMaps
Volume Serial Number is 5973-956A

Directory of D:\

10/13/2010	11:31 AM	<DIR>	Additional Cherokee-Era Geologic Mapping Scans
		0 File(s)	0 bytes

Directory of D:\Additional Cherokee-Era Geologic Mapping Scans

10/13/2010	11:31 AM	<DIR>	.
10/13/2010	12:35 PM	<DIR>	..
10/13/2010	11:32 AM	<DIR>	Final Fdn Maps - CK-10 Series MLS Folder 13
10/12/2010	04:34 PM	<DIR>	Service Building
10/12/2010	04:49 PM	<DIR>	Top of Rock Maps - CK-20 Series MLS Folder 14
10/13/2010	11:28 AM	<DIR>	Wall Maps - U1 MLS Folder13, U2 MLS Folder 8
		0 File(s)	0 bytes

Directory of D:\Additional Cherokee-Era Geologic Mapping Scans\Final Fdn Maps - CK-10 Series MLS Folder 13

10/13/2010	11:32 AM	<DIR>	.
10/13/2010	11:31 AM	<DIR>	..
10/13/2010	11:32 AM		0 CK-10 Series Previously Transmitted
		1 File(s)	0 bytes

Directory of D:\Additional Cherokee-Era Geologic Mapping Scans\Service Building

10/12/2010	04:34 PM	<DIR>	.
10/13/2010	11:31 AM	<DIR>	..
10/12/2010	01:37 PM		9,940,479 122_20101012.jpg
10/12/2010	01:39 PM		8,052,850 123_20101012.jpg
		2 File(s)	17,993,329 bytes

Directory of D:\Additional Cherokee-Era Geologic Mapping Scans\Top of Rock Maps - CK-20 Series MLS Folder 14

10/12/2010	04:49 PM	<DIR>	.
10/13/2010	11:31 AM	<DIR>	..
10/12/2010	04:01 PM		9,759,896 ck20-01_20101012_01.jpg
10/12/2010	04:01 PM		10,078,809 ck20-01_20101012_02.jpg
10/12/2010	04:01 PM		7,392,250 ck20-01_20101012_03.jpg
10/12/2010	04:02 PM		5,777,591 ck20-01_20101012_04.jpg
10/12/2010	04:02 PM		6,444,427 ck20-01_20101012_05.jpg
10/12/2010	04:02 PM		3,044,212 ck20-01_20101012_06.jpg
10/12/2010	04:07 PM		10,434,397 ck20-02_20101012_01.jpg
10/12/2010	04:07 PM		8,846,726 ck20-02_20101012_02.jpg
10/12/2010	04:07 PM		5,825,793 ck20-02_20101012_03.jpg
10/12/2010	04:08 PM		7,966,907 ck20-02_20101012_04.jpg
10/12/2010	04:08 PM		8,680,759 ck20-02_20101012_05.jpg
10/12/2010	04:08 PM		8,930,141 ck20-02_20101012_06.jpg
10/12/2010	04:11 PM		10,252,712 ck20-03_20101012_01.jpg
10/12/2010	04:12 PM		6,575,732 ck20-03_20101012_02.jpg

Mr. Tom Slavonic
October 13, 2010
Page 3 of 3

Listing of CD Folders and Files (sheet 2 of 2)

10/12/2010	04:12 PM	10,406,620	ck20-03_20101012_03.jpg
10/12/2010	04:12 PM	5,645,841	ck20-03_20101012_04.jpg
10/12/2010	04:13 PM	5,598,919	ck20-03_20101012_05.jpg
10/12/2010	04:13 PM	8,563,547	ck20-03_20101012_06.jpg
10/12/2010	04:15 PM	7,499,550	ck20-04_20101012_01.jpg
10/12/2010	04:16 PM	7,083,395	ck20-04_20101012_02.jpg
10/12/2010	04:16 PM	6,270,975	ck20-04_20101012_03.jpg
10/12/2010	04:16 PM	6,477,375	ck20-04_20101012_04.jpg
10/12/2010	04:18 PM	10,175,323	ck20-05_20101012_01.jpg
10/12/2010	04:19 PM	5,249,532	ck20-05_20101012_02.jpg
10/12/2010	04:19 PM	6,875,786	ck20-05_20101012_03.jpg
10/12/2010	04:19 PM	4,993,186	ck20-06_20101012_01.jpg
03/08/2007	12:03 PM	51,123,852	CK21-05A-002 Top of Rock Map Index.tif
	27 File(s)	245,974,253	bytes

Directory of D:\Additional Cherokee-Era Geologic Mapping Scans\Wall Maps - U1 MLS
Folder13, U2 MLS Folder 8

10/13/2010	11:28 AM	<DIR>	.
10/13/2010	11:31 AM	<DIR>	..
10/12/2010	03:36 PM	7,080,008	U1_wall_maps_20101012_01.jpg
10/12/2010	03:36 PM	4,285,881	U1_wall_maps_20101012_02.jpg
10/12/2010	03:36 PM	6,711,437	U1_wall_maps_20101012_03.jpg
10/12/2010	03:36 PM	5,910,759	U1_wall_maps_20101012_04.jpg
10/12/2010	03:36 PM	5,351,665	U1_wall_maps_20101012_05.jpg
10/12/2010	03:37 PM	5,696,710	U1_wall_maps_20101012_06.jpg
10/12/2010	03:37 PM	6,749,387	U1_wall_maps_20101012_07.jpg
10/12/2010	03:37 PM	2,149,403	U1_wall_maps_20101012_08.jpg
10/12/2010	03:37 PM	2,005,658	U1_wall_maps_20101012_09.jpg
10/12/2010	03:37 PM	5,404,262	U1_wall_maps_20101012_10.jpg
10/12/2010	03:38 PM	5,481,555	U1_wall_maps_20101012_11.jpg
10/12/2010	03:38 PM	6,481,455	U1_wall_maps_20101012_12.jpg
10/12/2010	03:38 PM	6,406,683	U1_wall_maps_20101012_13.jpg
10/12/2010	03:38 PM	5,417,767	U1_wall_maps_20101012_14.jpg
10/12/2010	03:39 PM	5,595,000	U1_wall_maps_20101012_15.jpg
10/12/2010	03:39 PM	5,830,501	U1_wall_maps_20101012_16.jpg
10/12/2010	03:39 PM	5,900,371	U1_wall_maps_20101012_17.jpg
10/12/2010	03:39 PM	6,162,857	U1_wall_maps_20101012_18.jpg
10/12/2010	02:37 PM	3,945,702	U1_wall_maps_20101012-1.jpg
10/12/2010	02:38 PM	2,790,311	U1_wall_maps_20101012-2.jpg
10/12/2010	02:39 PM	5,221,707	U1_wall_maps_20101012-3.jpg
10/12/2010	02:43 PM	6,149,398	U1_wall_maps_20101012-4.jpg
10/13/2010	11:10 AM	5,421,496	U2_wall_maps_20101013_125_PartA.jpg
10/13/2010	11:09 AM	5,670,236	U2_wall_maps_20101013_125_PartB.jpg
10/13/2010	11:10 AM	5,480,150	U2_wall_maps_20101013_126.jpg
10/13/2010	11:10 AM	5,564,012	U2_wall_maps_20101013_127.jpg
10/13/2010	11:10 AM	7,773,212	U2_wall_maps_20101013_128.jpg
10/13/2010	11:10 AM	4,793,258	U2_wall_maps_20101013_129.jpg
10/13/2010	11:10 AM	2,908,704	U2_wall_maps_20101013_130.jpg
10/13/2010	11:11 AM	4,569,143	U2_wall_maps_20101013_131.jpg
	30 File(s)	158,908,688	bytes

Total Files Listed:	
60 File(s)	422,876,270 bytes
15 Dir(s)	0 bytes free



November 23, 2010

Mr. Tom Slavonic
Enercon Services
4490 Old William Penn Highway
Murrysville, PA 15668

Subject: Final Foundation Index Map, Geologic Mapping Procedure, and
Supplemental Mapping Guidance

Dear Tom:

After our recent teleconference on qualification of Cherokee legacy geologic mapping documentation, Adam Wade pointed out that FWLA still needed to receive controlled distribution of several documents, including the Final Foundation Index Map, and the geologic mapping procedures, as well as input on those procedures from Dr. Hatcher. The attached CD contains these documents, as retrieved from several sources.

The files whose file name includes a Duke microfilm reel number were obtained from scans of microfilm records from Duke archives, and can be identified by the reel and frame number stenciled at the left of each page. The document whose name contains "MFS CK1108.00" was retrieved from Malcolm Schaeffer's Cherokee correspondence files that are now maintained as part of the Lee project documentation. The documents containing "LETCo" in the filename were retrieved from the Law Engineering Cherokee files at MACTEC.

Comparison of the Duke and Law versions of the Geologic Mapping procedure give high confidence that the content of the two is the same, and reflects the procedures used in the field.

The Duke archive microfilm record contains only the first page of Dr. Hatcher's letter, but it is the same as the first page of Mr. Schaeffer's complete (two-page) document. Comparing Mr. Schaeffer's CK1108.00 complete Hatcher document to the comparable document from Law, one can confirm that the content is the same.

The CK1108.00 version and the Law version of the Hatcher letter differ in some cosmetic ways such as pagination. I believe this can be explained by recalling that in 1977, such letters were produced on a typewriter, and a letter to two different companies would normally have two originals typed. It is not unreasonable to expect that a 1977 typist may have created different page breaks for the two letters, while maintaining the same content.


Mr. Tom Slavonic
November 23, 2010
Page 2 of 2

The Final Foundation Index map is easily identified by its file name. The files are identified as shown in the listing below.

File Name	File Properties	
	Created	Size (Bytes)
1976-1130 Geologic Mapping Procedure, Pearce to Sams (From Duke Microfilm Reel 3184).pdf	11/22/2010 05:31 PM	808,352
1976-1130 Geologic Mapping Procedure, Pearce to Sams (From LETCo Cherokee Files).pdf	11/22/2010 05:32 PM	1,975,820
1977-0422 Geo Mapping Letter, Hatcher to Sams and Pearce (From Duke MFS CK1108.00).pdf	11/22/2010 05:34 PM	517,068
1977-0422 Geo Mapping Letter, Hatcher to Sams and Pearce (From Duke Microfilm Reel 3184).pdf	11/22/2010 05:34 PM	85,621
1977-0422 Geo Mapping Letter, Hatcher to Sams and Pearce (From LETCo Cherokee Files).pdf	11/22/2010 05:35 PM	341,589
Final Foundation Index Map (AKA Binder2 2).pdf	10/09/2006 09:27 AM	30,201,242

If you have questions, please call me at 704-382-7830.

Sincerely,

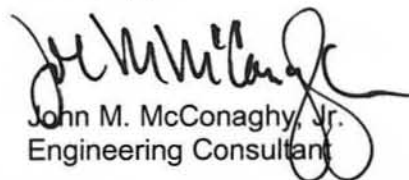

John M. McConaghy, Jr.
Engineering Consultant

Enclosure: 1 CD as described

cc: Mike Gray, FWLA (w/ enclosure)
Malcolm Schaeffer, HDR|DTA (w/ enclosure)
R.L. Morgan (w/o enclosure)
J.S. Thrasher (w/o enclosure)
J.R. Cassidy (w/o enclosure)
4000.01-09 (w/ enclosure)

ATTACHMENT 4

Duke Power Company Mapping Procedures and Addendum

Duke Power Company
Project 81
Cherokee Nuclear Station
Geologic Mapping Procedure
(November 30, 1976)

Transmitted to Law Engineering Testing Co. from Duke Power Company
[Duke File Name:1976-1130 Geologic Mapping Procedure, Pearce to Sams
(From Duke Microfilm Reel 3184).pdf]

12-14
12/12

November 30, 1976

VITAL NOTES

Mr. C. E. Sams
Law Engineering Testing Co.
P. O. Box 11297
Charlotte, N. C. 28209

RE: Cherokee 1-3
Geologic Mapping
File No: CK-1108.00

Dear Mr. Sams:

Attached is a copy of the procedure we propose to use for geologic mapping at Cherokee for your review. Please plan to meet with us at the Electric Center on Monday, December 13, 1976, at 2:00 p.m. to discuss our overall mapping program at Cherokee and Law Engineering's role in that program. We can discuss any comments you might have on the procedure at that time.

Yours very truly,

L. C. Dall, Chief Engineer
Civil/Environmental Division

By: I. W. Pearce, Principal Engineer

IWP/gc

Attachment

cc: C. Q. Reeves
D. R. Privett
H. F. Schaeffer

Handwritten notes:
Dall
12/13/76
2:00 p.m.
Cherokee
12/13
2-3
10:30
12/13/76
12/14/76
12/15/76
12/16/76
12/17/76
12/18/76
12/19/76
12/20/76
12/21/76
12/22/76
12/23/76
12/24/76
12/25/76
12/26/76
12/27/76
12/28/76
12/29/76
12/30/76
12/31/76
1/1/77
1/2/77
1/3/77
1/4/77
1/5/77
1/6/77
1/7/77
1/8/77
1/9/77
1/10/77
1/11/77
1/12/77
1/13/77
1/14/77
1/15/77
1/16/77
1/17/77
1/18/77
1/19/77
1/20/77
1/21/77
1/22/77
1/23/77
1/24/77
1/25/77
1/26/77
1/27/77
1/28/77
1/29/77
1/30/77
1/31/77
2/1/77
2/2/77
2/3/77
2/4/77
2/5/77
2/6/77
2/7/77
2/8/77
2/9/77
2/10/77
2/11/77
2/12/77
2/13/77
2/14/77
2/15/77
2/16/77
2/17/77
2/18/77
2/19/77
2/20/77
2/21/77
2/22/77
2/23/77
2/24/77
2/25/77
2/26/77
2/27/77
2/28/77
2/29/77
2/30/77
3/1/77
3/2/77
3/3/77
3/4/77
3/5/77
3/6/77
3/7/77
3/8/77
3/9/77
3/10/77
3/11/77
3/12/77
3/13/77
3/14/77
3/15/77
3/16/77
3/17/77
3/18/77
3/19/77
3/20/77
3/21/77
3/22/77
3/23/77
3/24/77
3/25/77
3/26/77
3/27/77
3/28/77
3/29/77
3/30/77
3/31/77
4/1/77
4/2/77
4/3/77
4/4/77
4/5/77
4/6/77
4/7/77
4/8/77
4/9/77
4/10/77
4/11/77
4/12/77
4/13/77
4/14/77
4/15/77
4/16/77
4/17/77
4/18/77
4/19/77
4/20/77
4/21/77
4/22/77
4/23/77
4/24/77
4/25/77
4/26/77
4/27/77
4/28/77
4/29/77
4/30/77
5/1/77
5/2/77
5/3/77
5/4/77
5/5/77
5/6/77
5/7/77
5/8/77
5/9/77
5/10/77
5/11/77
5/12/77
5/13/77
5/14/77
5/15/77
5/16/77
5/17/77
5/18/77
5/19/77
5/20/77
5/21/77
5/22/77
5/23/77
5/24/77
5/25/77
5/26/77
5/27/77
5/28/77
5/29/77
5/30/77
5/31/77
6/1/77
6/2/77
6/3/77
6/4/77
6/5/77
6/6/77
6/7/77
6/8/77
6/9/77
6/10/77
6/11/77
6/12/77
6/13/77
6/14/77
6/15/77
6/16/77
6/17/77
6/18/77
6/19/77
6/20/77
6/21/77
6/22/77
6/23/77
6/24/77
6/25/77
6/26/77
6/27/77
6/28/77
6/29/77
6/30/77
7/1/77
7/2/77
7/3/77
7/4/77
7/5/77
7/6/77
7/7/77
7/8/77
7/9/77
7/10/77
7/11/77
7/12/77
7/13/77
7/14/77
7/15/77
7/16/77
7/17/77
7/18/77
7/19/77
7/20/77
7/21/77
7/22/77
7/23/77
7/24/77
7/25/77
7/26/77
7/27/77
7/28/77
7/29/77
7/30/77
7/31/77
8/1/77
8/2/77
8/3/77
8/4/77
8/5/77
8/6/77
8/7/77
8/8/77
8/9/77
8/10/77
8/11/77
8/12/77
8/13/77
8/14/77
8/15/77
8/16/77
8/17/77
8/18/77
8/19/77
8/20/77
8/21/77
8/22/77
8/23/77
8/24/77
8/25/77
8/26/77
8/27/77
8/28/77
8/29/77
8/30/77
8/31/77
9/1/77
9/2/77
9/3/77
9/4/77
9/5/77
9/6/77
9/7/77
9/8/77
9/9/77
9/10/77
9/11/77
9/12/77
9/13/77
9/14/77
9/15/77
9/16/77
9/17/77
9/18/77
9/19/77
9/20/77
9/21/77
9/22/77
9/23/77
9/24/77
9/25/77
9/26/77
9/27/77
9/28/77
9/29/77
9/30/77
10/1/77
10/2/77
10/3/77
10/4/77
10/5/77
10/6/77
10/7/77
10/8/77
10/9/77
10/10/77
10/11/77
10/12/77
10/13/77
10/14/77
10/15/77
10/16/77
10/17/77
10/18/77
10/19/77
10/20/77
10/21/77
10/22/77
10/23/77
10/24/77
10/25/77
10/26/77
10/27/77
10/28/77
10/29/77
10/30/77
10/31/77
11/1/77
11/2/77
11/3/77
11/4/77
11/5/77
11/6/77
11/7/77
11/8/77
11/9/77
11/10/77
11/11/77
11/12/77
11/13/77
11/14/77
11/15/77
11/16/77
11/17/77
11/18/77
11/19/77
11/20/77
11/21/77
11/22/77
11/23/77
11/24/77
11/25/77
11/26/77
11/27/77
11/28/77
11/29/77
11/30/77
12/1/77
12/2/77
12/3/77
12/4/77
12/5/77
12/6/77
12/7/77
12/8/77
12/9/77
12/10/77
12/11/77
12/12/77
12/13/77
12/14/77
12/15/77
12/16/77
12/17/77
12/18/77
12/19/77
12/20/77
12/21/77
12/22/77
12/23/77
12/24/77
12/25/77
12/26/77
12/27/77
12/28/77
12/29/77
12/30/77
12/31/77
1/1/78
1/2/78
1/3/78
1/4/78
1/5/78
1/6/78
1/7/78
1/8/78
1/9/78
1/10/78
1/11/78
1/12/78
1/13/78
1/14/78
1/15/78
1/16/78
1/17/78
1/18/78
1/19/78
1/20/78
1/21/78
1/22/78
1/23/78
1/24/78
1/25/78
1/26/78
1/27/78
1/28/78
1/29/78
1/30/78
1/31/78
2/1/78
2/2/78
2/3/78
2/4/78
2/5/78
2/6/78
2/7/78
2/8/78
2/9/78
2/10/78
2/11/78
2/12/78
2/13/78
2/14/78
2/15/78
2/16/78
2/17/78
2/18/78
2/19/78
2/20/78
2/21/78
2/22/78
2/23/78
2/24/78
2/25/78
2/26/78
2/27/78
2/28/78
2/29/78
2/30/78
3/1/78
3/2/78
3/3/78
3/4/78
3/5/78
3/6/78
3/7/78
3/8/78
3/9/78
3/10/78
3/11/78
3/12/78
3/13/78
3/14/78
3/15/78
3/16/78
3/17/78
3/18/78
3/19/78
3/20/78
3/21/78
3/22/78
3/23/78
3/24/78
3/25/78
3/26/78
3/27/78
3/28/78
3/29/78
3/30/78
3/31/78
4/1/78
4/2/78
4/3/78
4/4/78
4/5/78
4/6/78
4/7/78
4/8/78
4/9/78
4/10/78
4/11/78
4/12/78
4/13/78
4/14/78
4/15/78
4/16/78
4/17/78
4/18/78
4/19/78
4/20/78
4/21/78
4/22/78
4/23/78
4/24/78
4/25/78
4/26/78
4/27/78
4/28/78
4/29/78
4/30/78
5/1/78
5/2/78
5/3/78
5/4/78
5/5/78
5/6/78
5/7/78
5/8/78
5/9/78
5/10/78
5/11/78
5/12/78
5/13/78
5/14/78
5/15/78
5/16/78
5/17/78
5/18/78
5/19/78
5/20/78
5/21/78
5/22/78
5/23/78
5/24/78
5/25/78
5/26/78
5/27/78
5/28/78
5/29/78
5/30/78
5/31/78
6/1/78
6/2/78
6/3/78
6/4/78
6/5/78
6/6/78
6/7/78
6/8/78
6/9/78
6/10/78
6/11/78
6/12/78
6/13/78
6/14/78
6/15/78
6/16/78
6/17/78
6/18/78
6/19/78
6/20/78
6/21/78
6/22/78
6/23/78
6/24/78
6/25/78
6/26/78
6/27/78
6/28/78
6/29/78
6/30/78
7/1/78
7/2/78
7/3/78
7/4/78
7/5/78
7/6/78
7/7/78
7/8/78
7/9/78
7/10/78
7/11/78
7/12/78
7/13/78
7/14/78
7/15/78
7/16/78
7/17/78
7/18/78
7/19/78
7/20/78
7/21/78
7/22/78
7/23/78
7/24/78
7/25/78
7/26/78
7/27/78
7/28/78
7/29/78
7/30/78
7/31/78
8/1/78
8/2/78
8/3/78
8/4/78
8/5/78
8/6/78
8/7/78
8/8/78
8/9/78
8/10/78
8/11/78
8/12/78
8/13/78
8/14/78
8/15/78
8/16/78
8/17/78
8/18/78
8/19/78
8/20/78
8/21/78
8/22/78
8/23/78
8/24/78
8/25/78
8/26/78
8/27/78
8/28/78
8/29/78
8/30/78
8/31/78
9/1/78
9/2/78
9/3/78
9/4/78
9/5/78
9/6/78
9/7/78
9/8/78
9/9/78
9/10/78
9/11/78
9/12/78
9/13/78
9/14/78
9/15/78
9/16/78
9/17/78
9/18/78
9/19/78
9/20/78
9/21/78
9/22/78
9/23/78
9/24/78
9/25/78
9/26/78
9/27/78
9/28/78
9/29/78
9/30/78
10/1/78
10/2/78
10/3/78
10/4/78
10/5/78
10/6/78
10/7/78
10/8/78
10/9/78
10/10/78
10/11/78
10/12/78
10/13/78
10/14/78
10/15/78
10/16/78
10/17/78
10/18/78
10/19/78
10/20/78
10/21/78
10/22/78
10/23/78
10/24/78
10/25/78
10/26/78
10/27/78
10/28/78
10/29/78
10/30/78
10/31/78
11/1/78
11/2/78
11/3/78
11/4/78
11/5/78
11/6/78
11/7/78
11/8/78
11/9/78
11/10/78
11/11/78
11/12/78
11/13/78
11/14/78
11/15/78
11/16/78
11/17/78
11/18/78
11/19/78
11/20/78
11/21/78
11/22/78
11/23/78
11/24/78
11/25/78
11/26/78
11/27/78
11/28/78
11/29/78
11/30/78
12/1/78
12/2/78
12/3/78
12/4/78
12/5/78
12/6/78
12/7/78
12/8/78
12/9/78
12/10/78
12/11/78
12/12/78
12/13/78
12/14/78
12/15/78
12/16/78
12/17/78
12/18/78
12/19/78
12/20/78
12/21/78
12/22/78
12/23/78
12/24/78
12/25/78
12/26/78
12/27/78
12/28/78
12/29/78
12/30/78
12/31/78
1/1/79
1/2/79
1/3/79
1/4/79
1/5/79
1/6/79
1/7/79
1/8/79
1/9/79
1/10/79
1/11/79
1/12/79
1/13/79
1/14/79
1/15/79
1/16/79
1/17/79
1/18/79
1/19/79
1/20/79
1/21/79
1/22/79
1/23/79
1/24/79
1/25/79
1/26/79
1/27/79
1/28/79
1/29/79
1/30/79
1/31/79
2/1/79
2/2/79
2/3/79
2/4/79
2/5/79
2/6/79
2/7/79
2/8/79
2/9/79
2/10/79
2/11/79
2/12/79
2/13/79
2/14/79
2/15/79
2/16/79
2/17/79
2/18/79
2/19/79
2/20/79
2/21/79
2/22/79
2/23/79
2/24/79
2/25/79
2/26/79
2/27/79
2/28/79
2/29/79
2/30/79
3/1/79
3/2/79
3/3/79
3/4/79
3/5/79
3/6/79
3/7/79
3/8/79
3/9/79
3/10/79
3/11/79
3/12/79
3/13/79
3/14/79
3/15/79
3/16/79
3/17/79
3/18/79
3/19/79
3/20/79
3/21/79
3/22/79
3/23/79
3/24/79
3/25/79
3/26/79
3/27/79
3/28/79
3/29/79
3/30/79
3/31/79
4/1/79
4/2/79
4/3/79
4/4/79
4/5/79
4/6/79
4/7/79
4/8/79
4/9/79
4/10/79
4/11/79
4/12/79
4/13/79
4/14/79
4/15/79
4/16/79
4/17/79
4/18/79
4/19/79
4/20/79
4/21/79
4/22/79
4/23/79
4/24/79
4/25/79
4/26/79
4/27/79
4/28/79
4/29/79
4/30/79
5/1/79
5/2/79
5/3/79
5/4/79
5/5/79
5/6/79
5/7/79
5/8/79
5/9/79
5/10/79
5/11/79
5/12/79
5/13/79
5/14/79
5/15/79
5/16/79
5/17/79
5/18/79
5/19/79
5/20/79
5/21/79
5/22/79
5/23/79
5/24/79
5/25/79
5/26/79
5/27/79
5/28/79
5/29/79
5/30/79
5/31/79
6/1/79
6/2/79
6/3/79
6/4/79
6/5/79
6/6/79
6/7/79
6/8/79
6/9/79
6/10/79
6/11/79
6/12/79
6/13/79
6/14/79
6/15/79
6/16/79
6/17/79
6/18/79
6/19/79
6/20/79
6/21/79
6/22/79
6/23/79
6/24/79
6/25/79
6/26/79
6/27/79
6/28/79
6/29/79
6/30/79
7/1/79
7/2/79
7/3/79
7/4/79
7/5/79
7/6/79
7/7/79
7/8/79
7/9/79
7/10/79
7/11/79
7/12/79
7/13/79
7/14/79
7/15/79
7/16/79
7/17/79
7/18/79
7/19/79
7/20/79
7/21/79
7/22/79
7/23/79
7/24/79
7/25/79
7/26/79
7/27/79
7/28/79
7/29/79
7/30/79
7/31/79
8/1/79
8/2/79
8/3/79
8/4/79
8/5/79
8/6/79
8/7/79
8/8/79
8/9/79
8/10/79
8/11/79
8/12/79
8/13/79
8/14/79
8/15/79
8/16/79
8/17/79
8/18/79
8/19/79
8/20/79
8/21/79
8/22/79
8/23/79
8/24/79
8/25/79
8/26/79
8/27/79
8/28/79
8/29/79
8/30/79
8/31/79
9/1/79
9/2/79
9/3/79
9/4/79
9/5/79
9/6/79
9/7/79
9/8/79
9/9/79
9/10/79
9/11/79
9/12/79
9/13/79
9/14/79
9/15/79
9/16/79
9/17/79
9/18/79
9/19/79
9/20/79
9/21/79
9/22/79
9/23/79
9/24/79
9/25/79
9/26/79
9/27/79
9/28/79
9/29/79
9/30/79
10/1/79
10/2/79
10/3/79
10/4/79
10/5/79
10/6/79
10/7/79
10/8/79
10/9/79
10/10/79
10/11/79
10/12/79
10/13/79
10/14/79
10/15/79
10/16/79
10/17/79
10/18/79
10/19/79
10/20/79
10/21/79
10/22/79
10/23/79
10/24/79
10/25/79
10/26/79
10/27/79
10/28/79
10/29/79
10/30/79
10/31/79
11/1/79
11/2/79
11/3/79
11/4/79
11/5/79
11/6/79
11/7/79
11/8/79
11/9/79
11/10/79
11/11/79
11/12/79
11/13/79
11/14/79
11/15/79
11/16/79
11/17/79
11/18/79
11/19/79
11/20/79
11/21/79
11/22/79
11/23/79
11/24/79
11/25/79
11/26/79
11/27/79
11/28/79
11/29/79
11/30/79
12/1/79
12/2/79
12/3/79
12/4/79
12/5/79
12/6/79
12/7/79
12/8/79
12/9/79
12/10/79
12/11/79
12/12/79
12/13/79
12/14/79
12/15/79
12/16/79
12/17/79
12/18/79
12/19/79
12/20/79
12/21/79
12/22/79
12/23/79
12/24/79
12/25/79
12/26/79
12/27/79
12/28/79
12/29/79
12/30/79
12/31/79
1/1/80
1/2/80
1/3/80
1/4/80
1/5/80
1/6/80
1/7/80
1/8/80
1/9/80
1/10/80
1/11/80
1/12/80
1/13/80
1/14/80
1/15/80
1/16/80
1/17/80
1/18/80
1/19/80
1/20/80
1/21/80
1/22/80
1/23/80
1/24/80
1/25/80
1/26/80
1/27/80
1/28/80
1/29/80
1/30/80
1/31/80
2/1/80
2/2/80
2/3/80
2/4/80
2/5/80
2/6/80
2/7/80
2/8/80
2/9/80
2/10/80
2/11/80
2/12/80
2/13/80
2/14/80
2/15/80
2/16/80
2/17/80
2/18/80
2/19/80
2/20/80
2/21/80
2/22/80
2/23/80
2/24/80
2/25/80
2/26/80
2/27/80
2/28/80
2/29/80
2/30/80
3/1/80
3/2/80
3/3/80
3/4/80
3/5/80
3/6/80
3/7/80
3/8/80
3/9/80
3/10/80
3/11/80
3/12/80
3/13/80
3/14/80
3/15/80
3/16/80
3/17/80
3/18/80
3/19/80
3/20/80
3/21/80
3/22/80
3/23/80
3/24/80
3/25/80
3/26/80
3/27/80
3/28/80
3/29/80
3/30/80
3/31/80
4/1/80
4/2/80
4/3/80
4/4/80
4/5/80
4/6/80
4/7/80
4/8/80
4/9/80
4/10/80
4/11/80
4/12/80
4/13/80
4/14/80
4/15/80
4/16/80
4/17/80
4/18/80
4/19/80
4/20/80
4/21/80
4/22/80
4/23/80
4/24/80
4/25/80
4/26/80
4/27/80
4/28/80
4/29/80
4/30/80
5/1/80
5/2/80
5/3/80
5/4/80
5/5/80
5/6/80
5/7/80
5/8/80
5/9/80
5/10/80
5/11/80
5/12/80
5/13/80
5/14/80
5/15/80
5/16/80
5/17/80
5/18/80
5/19/80
5/20/80
5/21/80
5/22/80
5/23/80
5/24/80
5/25/80
5/26/80
5/27/80
5/28/80
5/29/80
5/30/80
5/31/80
6/1/80
6/2/80
6/3/80
6/4/80
6/5/80
6/6/80
6/7/80
6/8/80
6/9/80
6/10/80
6/11/80
6/12/80
6/13/80
6/14/80
6/15/80
6/16/80
6/17/80
6/18/80
6/19/80
6/20/80
6/21/80
6/22/80

Geologic Mapping Procedure
Outline

SECTION I - GENERAL DESCRIPTION

- A. Purpose
- B. Scope of Mapping and Sequence
- C. Definition of Responsible Parties
- 1) Responsible Engineer
 - 2) Geologist
 - 3) Field Engineer
 - 4) Consultant
 - 5) Independent Geologic Consultant
- D. Assignment of Responsibilities
- 1) Geologist
 - 2) Field Engineer
 - 3) Consultant
 - 4) Independent Geologic Consultant
- E. Requirements for Mapping
- 1) Phase I - Initial Mapping
 - 2) Phase II - Final Excavation Mapping

SECTION II - TECHNICAL ASPECTS OF MAPPING

SECTION III - INVESTIGATING AND DOCUMENTING GEOLOGIC FAULT FEATURES

0 0 3 1 8 4 0 4 6 1

DUKE POWER COMPANY
PROJECT 81
CHEROKEE NUCLEAR STATION
GEOLOGIC MAPPING PROCEDURE

ATTACHMENT

Section I - General Description

A. PURPOSE

The purpose of the geologic mapping program for Cherokee Station is to provide a permanent record of the foundation conditions encountered in areas of safety-related structures as outlined in PSAR Section 2.5.1.2(9). This Section of the procedure outlines the relationship of responsibilities and activities between Design Engineering and Construction Departments, and the Consultants in the following areas:

- Scope of Mapping and Sequence
- Definition of Parties
- Assignment of Responsibilities
- Requirements for Mapping

B. SCOPE OF MAPPING AND SEQUENCE

The geologic mapping required by this procedure shall be performed for certain designated areas including the following major plant structures:

- (1) Power Block Area - (Reactor Building, Auxiliary Building and Turbine Building Complex)
- (2) Nuclear Service Water Pond Dam foundation
- (3) NSW Pond Spillway Control Section foundation
- (4) NSW Pump Structure foundations

The complete program of geologic mapping shall be sequenced in two basic phases depending on the extent of excavation progress.

Phase I - Scale 1"=20' - Mapping of the top of rock before blasting is started in power block area only. Detailed mapping at 1"=5' where necessary.

Phase II - Scale 1"=10' - Mapping of final excavated surfaces. Detailed mapping at 1"=5' where necessary.

When the final foundation grade is above top of rock, no Phase I mapping will be necessary. Scale for final mapping in saprolite shall not be less than 1"=20'.

0 3 1 8 4 0 4 6 2

CK 1108-00

C. DEFINITION OF RESPONSIBLE PARTIES

- (1) Responsible Engineer - The Principal Engineer in charge of the responsible Civil Projects Section in the Civil/Environmental Division of Design Engineering Department or his designated representative.
- (2) Geologist - The individual designated by Chief Engineer of Civil/Environmental Division to act as his field representative in any matters pertaining to geologic mapping.
- (3) Field Engineer - The specific individual designated by the Construction Department Project Manager to be responsible for the coordination of all construction support or activities required for carrying out the geologic mapping program.
- (4) Consultant - The person or persons assigned by Law Engineering and Testing Co. (LETCo) with sufficient training and experience to assist with field mapping work and review of drawings and reports when requested by the Geologist or Responsible Engineer.
- (5) Independent Geologic Consultant - A third-party consultant (or consultants) with recognized expertise in the geology of the area engaged specifically for this work. This consultant will provide independent review of fault features and supporting data and conclusions where NRC notification is required for non-similar features as defined in Section III.

D. ASSIGNMENT OF RESPONSIBILITIES

All parties involved in the geologic mapping program will have general overall responsibilities to jointly support the requirement of the mapping program, to pursue their respective assignments in a timely and professional manner, and to assure that the resulting maps, data, reports, and documents are sufficient in content and accuracy to accomplish the purpose intended. The specific scope of responsibility for each of the parties for field mapping work is outlined below:

- (1) Geologist -
 - a. Supervises and coordinates all field geologic activity involved in mapping.
 - b. Schedules mapping of prepared areas designated by the Field Engineer and coordinates required construction support with Field Engineer. Provides Field Engineer with estimate of time required for mapping in specific areas.

- c. Determines the need for and extent of support necessary from Consultant (LETCO) and schedules personnel required for mapping.
- d. Schedules and supervises as necessary all office drafting associated with preparation of geologic maps.
- e. Coordinates review of field and office work, including preparation and review of reports, with Consultant (LETCO).
- f. Schedules and coordinates site visits of Independent Geologic Consultant when visits are required.
- g. Releases investigated areas to Field Engineer after completion of geologic mapping.
- h. When designated, represents Design Engineering during NRC site visits and inspections regarding geologic matters.

(2) Field Engineer -

- a. Schedules availability of areas to be mapped and assures that specific areas are cleaned and maintained until mapping is complete.
- b. Coordinates earthwork operations in areas requiring mapping with Geologist and advises when areas are ready for mapping.
- c. Schedules and coordinates labor, equipment, survey support, and other construction resources as necessary to assure that mapping can be completed as soon as possible.

(3) Consultant (LETCO) -

- a. Provides geologist personnel support for assistance in mapping when requested by the Geologist and/or the Responsible Engineer.
- b. Reviews all maps, drawings, data and reports relating to geology and foundation conditions and offers comments and suggestions as requested by the Geologist and/or the Responsible Engineer.
- c. Provides other specialized assistance in personnel or services if requested by the Geologist and/or the Responsible Engineer.

(4) Independent Geologic Consultant -

- a. Shall provide inspection, review and opinions pertaining to data developed for special features in consultation with Duke and Consultant (LETCO) when requested by the Geologist and/or the Responsible Engineer.

CK 110800

- b. May provide other services as may be necessary if requested by the Responsible Engineer.

E. REQUIREMENTS FOR MAPPING

Phase I - Initial Mapping (Top of Rock)

During early construction on the site, the Geologist will monitor the overall earthmoving activities and will record in a Geologic Field Log and by use of photographs any significant observable geologic features in the areas to be mapped. At an appropriate time before rock excavation begins, the Field Engineer will notify the Geologist when an area will be ready for inspection and mapping. The Field Engineer will coordinate the necessary construction resources to prepare the area for mapping.

Excavated areas will be mapped at elevations where earth and rock materials can no longer be removed with earthmoving equipment and blasting is required for further excavation. Preparation of an area for mapping will normally consist of a general clean-up of loose surface materials and gentle sloping of surfaces, where practicable. Limited portions of the area may have to be cleaned more thoroughly by air or water hoses, etc., to permit more detailed mapping, if features requiring detail study are found.

For areas scheduled to be mapped, the Geologist will schedule appropriate Duke Personnel and LETCO personnel, if required, to carry out the mapping in that area. In areas of exposed rock the Field Engineer will coordinate with survey crews to establish a 20 ft. grid reference system. The grid shall be plainly visible and shall be capable of being easily photographed. Iridescent type paint may be used for marking the grid and elevations shall be determined on certain grid points as requested by the Geologist to assist in map work. A 5 ft. grid may be required in some areas if determined necessary by the Geologist.

If the area to be mapped contains sloped surfaces, at greater than 30° angle from horizontal, or nearly vertical walls, the Geologist may request the Field Engineer to have the slope marked off in grids on the slope area. The Field Engineer shall also schedule and provide appropriate construction equipment or safety-ropes, etc., to allow taking of structural readings on steep slopes as requested by the Geologist. When all mapping of an

area has been completed, the Geologist will release the area to the Field Engineer for subsequent excavation.

Phase II - Final Excavation Mapping

As the excavation of an area to be mapped nears final grade, the Field Engineer will advise the Geologist of the expected date when excavation and cleanup of the area will be complete and available for mapping. The Geologist will then determine the expected mapping completion date based on his estimate of required work for the area.

The area shall be mapped as soon as practicable after it is cleaned. Various special equipment and methods may have to be employed by the Field Engineer to maintain a mappable surface. Normally, visible 10 ft. grid reference points will be provided by the Field Engineer for Phase II mapping. The Geologist shall coordinate the mapping with the Field Engineer so that priority can be placed on any critical portions of an area.

When final mapping has been completed in the area, the Geologist will release that area to the Field Engineer for construction.

0031840466

CK 1108.00

Section II - Technical Mapping Aspects

Geologic features shall be mapped at the top of rock, or Phase I mapping stage, at a scale of 1"=20' on base maps. Any detail mapping of features shall be at a scale of 1"=5'. Photographs reproduced to an appropriate scale may be used as permanent record and for checking field mapping as determined necessary by the Geologist.

In the final Phase II foundation mapping stage, structural data will be taken concurrently with the mapping effort whenever deemed necessary by the field Geologist. Density of structural readings in the powerhouse excavation should be about 2 readings per 10 ft. grid square or as many as deemed necessary by the Geologist to get a representative sample of the geologic features. The data should include measurements of the following types of geologic occurrences, where applicable:

foliation - type, strike, dip, weathering

joints - spacing, continuity, separation, roughness fill material,
strike, dip

shear planes

and faults - brecciation, offsets, strike, dip

contacts - rock types, weathering

As determined by the field Geologist, sufficient samples should be selected for study in thin section. The thin section data obtained should be keyed into the mapping and compared with thin section data obtained during previous studies in the area. For fault features, additional thin sections and other data may be required.

An appropriate index system shall be established to reference samples, features, and data to physical locations in the mapped areas. The system shall be suitable for cross-referencing and grouping of similar and non-similar features.

In addition, any potential problem features that may have engineering significance and will affect structure design or construction due to joints, shear zones or weathered condition of rock should be reported to the Responsible Engineer.

CK 1108.00

Section III - Investigating and Documenting Geologic Fault FeaturesA. INTRODUCTION

Extensive studies of fault features characteristic of the region and of the project site area have been made at the Catawba Nuclear Station (Docket Nos. 50-413 and -414) during geologic mapping and at the Cherokee project site in support of the Preliminary Safety Analysis Report for project licensing. These studies⁽¹⁾ establish that numerous fault features occur and can be anticipated in any large excavation in the region.

B. PURPOSE

The purpose of this section is to establish a procedure for investigating and documenting geological fault features. The fault investigation will utilize data from previous studies where applicable.

C. SCOPE

This Investigation relates directly to those geologic fault features occurring in excavations required for safety related structure foundations.

D. PROCEDURE

1. Geologic mapping will be conducted as stated in Cherokee PSAR Section 2.5.1.2(9) and Section IE and Section II of this Procedure.
2. In the event a feature as described below is discovered the (field) Geologist will promptly notify the Responsible Engineer. Features which are reportable to Responsible Engineer may include brecciated zones containing offsets and any other offsets or displaced feature of tectonic origin.
3. The Responsible Engineer will hold any structure construction in an area containing a feature as described in 2 above until a determination

(1) Reference: Catawba Nuclear Station - PSAR, Chapter 2, Section 2.5, Appendices 2C and 2E
 - "Final Geological Report on Brecciated Zones"
 Cherokee Nuclear Station - PSAR, Chapter 2, Section 2.5, Appendices 2C and 2E

0031840468

- can be made 1) that the feature is similar to features previously studied by observation and that its relevant characteristics can be determined by correlation to previously studied features or (2) that the feature is not similar to any previously studied feature and requires new investigation.
4. For similar features (described in item 3(1)), the Geologist will so notify the Responsible Engineer who will release work in the area as soon as the Geologist has indexed the feature, documented it by detailed mapping and photographs, and established the feature's similarity to a previously established feature. This similarity will be documented by comparing relevant characteristics to features observed and studied at Catawba Nuclear Station during mapping or in any of the numerous test pits opened at the Cherokee site during subsurface investigative studies. Where this similarity can be established and documented, mapping and project work will continue routinely. A tabular summary will be prepared which indexes each occurrence of a feature and makes specific comparison to a previously studied feature. Documentation will be subject to audit during field inspections by NRC.
 5. For features where similarity cannot be established by comparison to features previously studied at the Cherokee or Catawba sites, the Responsible Engineer will continue to hold work in the area and notify the NRC Project Manager of the discovery. The geologic feature will then be left exposed for ten (10) days for NRC inspection.
 - 5a. Duke with the assistance of Law Engineering Testing Company and/or other consultant will map the feature, develop data, and determine if the feature falls in the sequence of geologic events established and reported in the Cherokee PSAR.
 - 5b. A third party, independent geologic consultant, will be engaged and will visit the site to examine the feature and examine the data developed by Duke and LETCo and/or other consultant. The Geologist will notify the Responsible Engineer (when geologic mapping, photography and field data gathering have been completed) that investigations have been completed and documented. The independent consultant will report his findings to the Responsible Engineer.

CK 11108-00

5c. If the independent geologic consultant concurs with Duke's conclusions, the Responsible Engineer will then release the area for project construction activity upon completion of item 5b.

5d. For non-similar features a report will be prepared which shall consist of the following:

- (1) Description of the feature including the investigation and description of data obtained
- (2) Geologic history
- (3) Summary and conclusions
- (4) Geologic maps and photographs
- (5) Report of findings by Geologic Consultant
- (6) This report and other data will be available for NRC review whenever requested.

0031840470

Addendum to Mapping Procedures
(April 22, 1977)

Transmitted to Law Engineering Company and
Duke Power Company from Clemson University

[Duke File Name:1977-0422 Geo Mapping Letter, Hatcher to Sams and
Pearce (From Duke Microfilm Reel 3184).pdf]

APRIL 22, 1977

CK 1108.00

Mr. I. W. Pearce
Principal Engineer
Civil-Environmental Division
Duke Power Company
P. O. Box 2178
Charlotte, NC 28242

and

Mr. C. E. Sams
Assistant Vice-President
Law Engineering Testing Company
P. O. Box 11297
Charlotte, NC 28209

Dear Sirs:

A meeting was held April 13, 1977, at Cherokee Nuclear Station for the purpose of examining bedrock features in the cleaned area in the Number 1 Turbine Building. Present at the meeting were Malcomb N. Schaeffer, Duke Power Company, Neil J. Gilbert, Law Engineering Testing Company and myself.

The meeting began with a preliminary briefing by Malcomb Schaeffer over lunch. We arrived at the site at about 1:00 PM and joined N. J. Gilbert on the cleaned area in Number 1 Turbine Building. We examined bedrock lithologies and structures and studied the 1" = 20' geologic maps prepared of the cleaned area.

After the examination of bedrock features on the site we returned to the construction site office to discuss the nature of the geologic mapping and more specifically the problems related to 1" = 5' scale mapping and what should be mapped.

The following recommendations were formulated as a result of these discussions:

1. Mapping of features at 1" = 5' scale.

- (a) There should be a minimum of 2 feet offset on a fault. This is the threshold of visibility of offset at the 1" = 20' scale.

and/or

- (b) There should be 50 feet traceable length on a fault. This is again related to a significant threshold of prominence of a structural feature on a 1" = 20' scale map.

and/or

- (c) Cataclastic zones of significant thickness. A minimum thickness of 1 foot is arbitrarily chosen.

Corollary to the above:

Combinations of greater offset with less traceable length and/or thicker

0 3 1 8 4 0 6 2 7

Addendum to Mapping Procedures

(April 22, 1977)

Transmitted to Law Engineering Company and
Duke Power Company from Clemson University

[Duke File Name: 1977-0422 Geo Mapping Letter, Hatcher to Sams and
Pearce (From Duke MFS CK1108.00).pdf]

Mr. I. W. Pearce
Principal Engineer
Civil-Environmental Division
Duke Power Company
P. O. Box 2178
Charlotte, NC 28242

and

Mr. C. E. Sams
Assistant Vice-President
Law Engineering Testing Company
P. O. Box 11297
Charlotte, NC 28209

Dear Sirs:

A meeting was held April 13, 1977, at Cherokee Nuclear Station for the purpose of examining bedrock features in the cleaned area in the Number 1 Turbine Building. Present at the meeting were Malcomb N. Schaeffer, Duke Power Company, Neil J. Gilbert, Law Engineering Testing Company and myself.

The meeting began with a preliminary briefing by Malcomb Schaeffer over lunch. We arrived at the site at about 1:00 PM and joined N. J. Gilbert on the cleaned area in Number 1 Turbine Building. We examined bedrock lithologies and structures and studied the 1" = 20' geologic maps prepared of the cleaned area.

After the examination of bedrock features on the site we returned to the construction site office to discuss the nature of the geologic mapping and more specifically the problems related to 1" = 5' scale mapping and what should be mapped.

The following recommendations were formulated as a result of these discussions:

1. Mapping of features at 1" = 5' scale.

- (a) There should be a minimum of 2 feet offset on a fault. This is the threshold of visibility of offset at the 1" = 20' scale.

and/or

- (b) There should be 50 feet traceable length on a fault. This is again related to a significant threshold of prominence of a structural feature on a 1" = 20' scale map.

and/or

- (c) Cataclastic zones of significant thickness. A minimum thickness of 1 foot is arbitrarily chosen.

Corollary to the above:

Combinations of greater offset with less traceable length and/or thicker

Mr. I. W. Pearce,
Mr. C. E. Sams
April 22, 1977
Page -2-


cataclastic zones may in the Geologist's judgment warrant 1" = 5' scale mapping. Also, greater traceable length and lesser offset may likewise require 1" = 5' scale mapping.

2. Repetitious sampling of features otherwise established as similar during the initial phases of the top of rock mapping program should not be undertaken. However, samples should be taken at the discretion of the Geologist.

We returned to the site at 5:25 P.M. after the above recommendations were formulated and examined a fault previously not seen by the Independent Geologic Consultant. The above recommendations were applied to this fault and appeared to work well.

The meeting was adjourned at 6:00 P.M.

Sincerely,

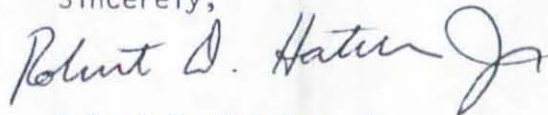

Robert D. Hatcher, Jr.
Professor of Geology
Clemson University
Clemson, SC 29631

RDH:sr

cc: Dr. Donald T. Secor, Jr.

Duke Power Company
Project 81
Cherokee Nuclear Station
Geologic Mapping Procedure
(November 30, 1976)

Transmitted to Law Engineering Testing Co. from Duke Power Company
[Duke File Name:1976-1130 Geologic Mapping Procedure, Pearce to Sams
(From LETCo Cherokee Files).pdf]

DUKE POWER COMPANY

P. O. BOX 2178

GENERAL OFFICES
422 SOUTH CHURCH STREET
CHARLOTTE, N. C. 28201

TELEPHONE: AREA 704
374-4011

November 30, 1976

COPY TO NEIL GILBERT

Mr. C. E. Sams
Law Engineering Testing Co.
P. O. Box 11297
Charlotte, N. C. 28209


RE: Cherokee 1-3
Geologic Mapping
File No: CK-1108.00

Dear Mr. Sams:

15
Wed Attached is a copy of the procedure we propose to use for geologic mapping at Cherokee for your review. Please plan to meet with us at the Electric Center on Monday, December 13, 1976, at 2:00 p.m. to discuss our overall mapping program at Cherokee and Law Engineering's role in that program. We can discuss any comments you might have on the procedure at that time.

Yours very truly,

L. C. Dail, Chief Engineer
Civil/Environmental Division


By: I. W. Pearce, Principal Engineer

IWP/gc

Attachment

cc: C. Q. Reeves
D. R. Privett
M. F. Schaeffer

Geologic Mapping Procedure Outline

SECTION I - GENERAL DESCRIPTION

- A. Purpose
- B. Scope of Mapping and Sequence
- C. Definition of Responsible Parties
 - 1) Responsible Engineer
 - 2) Geologist - MALCOLM SCHAEFFER
 - 3) Field Engineer
 - 4) Consultant
 - 5) Independent Geologic Consultant
- D. Assignment of Responsibilities
 - 1) Geologist
 - 2) Field Engineer
 - 3) Consultant
 - 4) Independent Geologic Consultant
- E. Requirements for Mapping
 - 1) Phase I - Initial Mapping
 - 2) Phase II - Final Excavation Mapping

SECTION II - TECHNICAL ASPECTS OF MAPPING

SECTION III - INVESTIGATING AND DOCUMENTING GEOLOGIC FAULT FEATURES

DUKE POWER COMPANY
PROJECT 81
CHEROKEE NUCLEAR STATION
GEOLOGIC MAPPING PROCEDURE

Section I - General Description

A. PURPOSE

The purpose of the geologic mapping program for Cherokee Station is to provide a permanent record of the foundation conditions encountered in areas of safety-related structures as outlined in PSAR Section 2.5.1.2(9). This Section of the procedure outlines the relationship of responsibilities and activities between Design Engineering and Construction Departments, and the Consultants in the following areas:

- Scope of Mapping and Sequence
- Definition of Parties
- Assignment of Responsibilities
- Requirements for Mapping

B. SCOPE OF MAPPING AND SEQUENCE

The geologic mapping required by this procedure shall be performed for certain designated areas including the following major plant structures:

- (1) Power Block Area - (Reactor Building, Auxiliary Building and Turbine Building Complex)
- (2) Nuclear Service Water Pond Dam foundation
- (3) NSW Pond Spillway Control Section foundation
- (4) NSW Pump Structure foundations

The complete program of geologic mapping shall be sequenced in two basic phases depending on the extent of excavation progress.

Phase I - Scale 1"=20' - Mapping of the top of rock before blasting is started in power block area only. Detailed mapping at 1"=5' where necessary.

Phase II - Scale 1"=10' - Mapping of final excavated surfaces. Detailed mapping at 1"=5' where necessary.

When the final foundation grade is above top of rock, no Phase I mapping will be necessary. Scale for final mapping in saprolite shall not be less than 1"=20'.

C. DEFINITION OF RESPONSIBLE PARTIES

- (1) Responsible Engineer - The Principal Engineer in charge of the responsible Civil Projects Section in the Civil/Environmental Division of Design Engineering Department or his designated representative. *I.W. PEARCE
Alternate: CQ Person*
- (2) Geologist - The individual designated by Chief Engineer of Civil/Environmental Division to act as his field representative in any matters pertaining to geologic mapping. *MALCOLM*
- (3) Field Engineer - The specific individual designated by the Construction Department Project Manager to be responsible for the coordination of all construction support or activities required for carrying out the geologic mapping program.
- (4) Consultant - The person or persons assigned by Law Engineering and Testing Co. (LETCo) with sufficient training and experience to assist with field mapping work and review of drawings and reports when requested by the Geologist or Responsible Engineer.
- (5) Independent Geologic Consultant - A third-party consultant (or consultants) with recognized expertise in the geology of the area engaged specifically for this work. This consultant will provide independent review of fault features and supporting data and conclusions where NRC notification is required for non-similar features as defined in Section III. *Bob Hatcher*

D. ASSIGNMENT OF RESPONSIBILITIES

All parties involved in the geologic mapping program will have general overall responsibilities to jointly support the requirement of the mapping program, to pursue their respective assignments in a timely and professional manner, and to assure that the resulting maps, data, reports, and documents are sufficient in content and accuracy to accomplish the purpose intended. The specific scope of responsibility for each of the parties for field mapping work is outlined below:

- (1) Geologist -
- a. Supervises and coordinates all field geologic activity involved in mapping.
 - b. Schedules mapping of prepared areas designated by the Field Engineer and coordinates required construction support with Field Engineer. Provides Field Engineer with estimate of time required for mapping in specific areas.

- c. Determines the need for and extent of support necessary from Consultant (LETCO) and schedules personnel required for mapping.
 - d. Schedules and supervises as necessary all office drafting associated with preparation of geologic maps.
 - e. Coordinates review of field and office work, including preparation and review of reports, with Consultant (LETCO).
 - f. Schedules and coordinates site visits of Independent Geologic Consultant when visits are required.
 - g. Releases investigated areas to Field Engineer after completion of geologic mapping.
 - h. When designated, represents Design Engineering during NRC site visits and inspections regarding geologic matters.
- (2) Field Engineer -
- a. Schedules availability of areas to be mapped and assures that specific areas are cleaned and maintained until mapping is complete.
 - b. Coordinates earthwork operations in areas requiring mapping with Geologist and advises when areas are ready for mapping.
 - c. Schedules and coordinates labor, equipment, survey support, and other construction resources as necessary to assure that mapping can be completed as soon as possible.
- (3) Consultant (LETCO) -
- a. Provides geologist personnel support for assistance in mapping when requested by the Geologist and/or the Responsible Engineer.
 - b. Reviews all maps, drawings, data and reports relating to geology and foundation conditions and offers comments and suggestions as requested by the Geologist and/or the Responsible Engineer.
 - c. Provides other specialized assistance in personnel or services if requested by the Geologist and/or the Responsible Engineer.
- (4) Independent Geologic Consultant -
- a. Shall provide inspection, review and opinions pertaining to data developed for special features in consultation with Duke and Consultant (LETCO) when requested by the Geologist and/or the Responsible Engineer.

- b. May provide other services as may be necessary if requested by the Responsible Engineer.

E. REQUIREMENTS FOR MAPPING

Phase I - Initial Mapping (Top of Rock)

During early construction on the site, the Geologist will monitor the overall earthmoving activities and will record in a Geologic Field Log and by use of photographs any significant observable geologic features in the areas to be mapped. At an appropriate time before rock excavation begins, the Field Engineer will notify the Geologist when an area will be ready for inspection and mapping. The Field Engineer will coordinate the necessary construction resources to prepare the area for mapping.

Excavated areas will be mapped at elevations where earth and rock materials can no longer be removed with earthmoving equipment and blasting is required for further excavation. Preparation of an area for mapping will normally consist of a general clean-up of loose surface materials and gentle sloping of surfaces, where practicable. Limited portions of the area may have to be cleaned more thoroughly by air or water hoses, etc., to permit more detailed mapping, if features requiring detail study are found.

For areas scheduled to be mapped, the Geologist will schedule appropriate Duke Personnel and LETCO personnel, if required, to carry out the mapping in that area. In areas of exposed rock the Field Engineer will coordinate with survey crews to establish a 20 ft. grid reference system. The grid shall be plainly visible and shall be capable of being easily photographed. Iridescent type paint may be used for marking the grid and elevations shall be determined on certain grid points as requested by the Geologist to assist in map work. A 5 ft. grid may be required in some areas if determined necessary by the Geologist.

If the area to be mapped contains sloped surfaces, at greater than 30° angle from horizontal, or nearly vertical walls, the Geologist may request the Field Engineer to have the slope marked off in grids on the slope area. The Field Engineer shall also schedule and provide appropriate construction equipment or safety-ropes, etc., to allow taking of structural readings on steep slopes as requested by the Geologist. When all mapping of an

area has been completed, the Geologist will release the area to the Field Engineer for subsequent excavation.

Phase II - Final Excavation Mapping

As the excavation of an area to be mapped nears final grade, the Field Engineer will advise the Geologist of the expected date when excavation and cleanup of the area will be complete and available for mapping. The Geologist will then determine the expected mapping completion date based on his estimate of required work for the area.

The area shall be mapped as soon as practicable after it is cleaned. Various special equipment and methods may have to be employed by the Field Engineer to maintain a mappable surface. Normally, visible 10 ft. grid reference points will be provided by the Field Engineer for Phase II mapping. The Geologist shall coordinate the mapping with the Field Engineer so that priority can be placed on any critical portions of an area.

When final mapping has been completed in the area, the Geologist will release that area to the Field Engineer for construction.

Section II - Technical Mapping Aspects

Geologic features shall be mapped at the top of rock, or Phase I mapping stage, at a scale of 1"=20' on base maps. Any detail mapping of features shall be at a scale of 1"=5'. Photographs reproduced to an appropriate scale may be used as permanent record and for checking field mapping as determined necessary by the Geologist.

In the final Phase II foundation mapping stage, structural data will be taken concurrently with the mapping effort whenever deemed necessary by the field Geologist. Density of structural readings in the powerhouse excavation should be about 2 readings per 10 ft. grid square or as many as deemed necessary by the Geologist to get a representative sample of the geologic features. The data should include measurements of the following types of geologic occurrences, where applicable:

- foliation - type, strike, dip, weathering
- joints - spacing, continuity, separation, roughness fill material,
strike, dip
- shear planes
and faults - brecciation, offsets, strike, dip
- contacts - rock types, weathering

As determined by the field Geologist, sufficient samples should be selected for study in thin section. The thin section data obtained should be keyed into the mapping and compared with thin section data obtained during previous studies in the area. For fault features, additional thin sections and other data may be required.

An appropriate index system shall be established to reference samples, features, and data to physical locations in the mapped areas. The system shall be suitable for cross-referencing and grouping of similar and non-similar features.

In addition, any potential problem features that may have engineering significance and will affect structure design or construction due to joints, shear zones or weathered condition of rock should be reported to the Responsible Engineer.

Section III - Investigating and Documenting Geologic Fault Features

A. INTRODUCTION

Extensive studies of fault features characteristic of the region and of the project site area have been made at the Catawba Nuclear Station (Docket Nos. 50-413 and -414) during geologic mapping and at the Cherokee project site in support of the Preliminary Safety Analysis Report for project licensing. These studies⁽¹⁾ establish that numerous fault features occur and can be anticipated in any large excavation in the region.

B. PURPOSE

The purpose of this section is to establish a procedure for investigating and documenting geological fault features. The fault investigation will utilize data from previous studies where applicable.

C. SCOPE

This Investigation relates directly to those geologic fault features occurring in excavations required for safety related structure foundations.

D. PROCEDURE

1. Geologic mapping will be conducted as stated in Cherokee PSAR Section 2.5.1.2(9) and Section IE and Section II of this Procedure.
2. In the event a feature as described below is discovered the (field) Geologist will promptly notify the Responsible Engineer. Features which are reportable to Responsible Engineer may include brecciated zones containing offsets and any other offsets or displaced feature of tectonic origin.
3. The Responsible Engineer will hold any structure construction in an area containing a feature as described in 2 above until a determination

(1) Reference: Catawba Nuclear Station - PSAR, Chapter 2, Section 2.5, Appendices 2C and 2E
- "Final Geological Report on Brecciated Zones"
Cherokee Nuclear Station - PSAR, Chapter 2, Section 2.5, Appendices 2C and 2E

can be made 1) that the feature is similar to features previously studied by observation and that its relevant characteristics can be determined by correlation to previously studied features or (2) that the feature is not similar to any previously studied feature and requires new investigation.

4. For similar features (described in item 3(1)), the Geologist will so notify the Responsible Engineer who will release work in the area as soon as the Geologist has indexed the feature, documented it by detailed mapping and photographs, and established the feature's similarity to a previously established feature. This similarity will be documented by comparing relevant characteristics to features observed and studied at Catawba Nuclear Station during mapping or in any of the numerous test pits opened at the Cherokee site during subsurface investigative studies. Where this similarity can be established and documented, mapping and project work will continue routinely. A tabular summary will be prepared which indexes each occurrence of a feature and makes specific comparison to a previously studied feature. Documentation will be subject to audit during field inspections by NRC.
5. For features where similarity cannot be established by comparison to features previously studied at the Cherokee or Catawba sites, the Responsible Engineer will continue to hold work in the area and notify the NRC Project Manager of the discovery. The geologic feature will then be left exposed for ten (10) days for NRC inspection.
- 5a. Duke with the assistance of Law Engineering Testing Company and/or other consultant will map the feature, develop data, and determine if the feature falls in the sequence of geologic events established and reported in the Cherokee PSAR.
- 5b. A third party, independent geologic consultant, will be engaged and will visit the site to examine the feature and examine the data developed by Duke and LETCo and/or other consultant. The Geologist will notify the Responsible Engineer (when geologic mapping, photography and field data gathering have been completed) that investigations have been completed and documented. The independent consultant will report his findings to the Responsible Engineer.

5c. If the independent geologic consultant concurs with Duke's conclusions, the Responsible Engineer will then release the area for project construction activity upon completion of item 5b.

5d. For non-similar features a report will be prepared which shall consist of the following:

- (1) Description of the feature including the investigation and description of data obtained
- (2) Geologic history
- (3) Summary and conclusions
- (4) Geologic maps and photographs
- (5) Report of findings by Geologic Consultant
- (6) This report and other data will be available for NRC review whenever requested.

Addendum to Mapping Procedures
(April 22, 1977)

Transmitted to Law Engineering Company and
Duke Power Company from Clemson University

[Duke File Name:1977-0422 Geo Mapping Letter, Hatcher to Sams and
Pearce (From LETCo Cherokee Files).pdf]

Mr. C. E. Sams
Assistant Vice-President
Law Engineering Testing Company
P. O. Box 11297
Charlotte, NC 28209

and

Mr. I. W. Pearce
Principal Engineer
Civil-Environmental Division
Duke Power Company
P. O. Box 2178
Charlotte, NC 28242

Dear Sirs:

A meeting was held April 13, 1977, at Cherokee Nuclear Station for the purpose of examining bedrock features in the cleaned area in the Number 1 Turbine Building. Present at the meeting were Malcomb N. Schaeffer, Duke Power Company, Neil J. Gilbert, Law Engineering Company and myself.

The meeting began with a preliminary briefing by Malcomb Schaeffer over lunch. We arrived at the site at about 1:00 PM and joined N. J. Gilbert on the cleaned area in Number 1 Turbine Building. We examined bedrock lithologies and structures and studied the 1" = 20' geologic maps prepared of the cleaned area.

After the examination of bedrock features on the site we returned to the construction site office to discuss the nature of the geologic mapping and more specifically the problems related to 1" = 5' scale mapping and what should be mapped.

The following recommendations were formulated as a result of these discussions:

1. Mapping of features at 1" = 5' scale.

- (a) There should be a minimum of 2 feet offset on a fault. This is the threshold of visibility of offset at the 1" = 20' scale.

and/or

- (b) There should be 50 feet traceable length on a fault. This is again related to a significant threshold of prominence of a structural feature on a 1" = 20' scale map.

and/or

- (c) Cataclastic zones of significant thickness. A minimum thickness of 1 foot is arbitrarily chosen.

Mr. C. E. Sams
Mr. I. W. Pearce
April 22, 1977
Page -2-

Corollary to the above:


Combinations of greater offset with less traceable length and/or thicker cataclastic zones may in the Geologist's judgment warrant 1" = 5' scale mapping. Also, greater traceable length and lesser offset may likewise require 1" = 5' scale mapping.

2. Repetitious sampling of features otherwise established as similar during the initial phases of the top of rock mapping program should not be undertaken. However, samples should be taken at the discretion of the Geologist.

We returned to the site at 5:25 P.M. after the above recommendations were formulated and examined a fault previously not seen by the Independent Geologic Consultant. The above recommendations were applied to this fault and appeared to work well.

The meeting was adjourned at 6:00 P.M.

Sincerely,

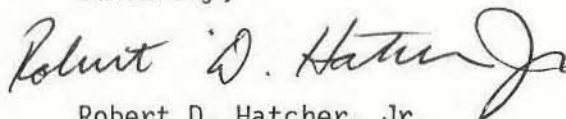

Robert D. Hatcher, Jr.
Professor of Geology
Clemson University
Clemson, SC 29631

RDH:sr

cc: Dr. Donald T. Secor, Jr.