

REGULATORY INFORMATION DISTRIBUTION SYSTEM (RIDS)

ACCESSION NBR: 8203290292 DOC. DATE: 82/03/25 NOTARIZED: NO DOCKET #
 FACIL: 50-361 San Onofre Nuclear Station, Unit 2, Southern California 05000361
 50-362 San Onofre Nuclear Station, Unit 3, Southern California 05000362
 AUTH. NAME AUTHOR AFFILIATION
 BASKIN, K.P. Southern California Edison Co.
 RECIP. NAME RECIPIENT AFFILIATION
 MIRAGLIA, F. Licensing Branch 3

SUBJECT: Forwards addl info in response to NRC 820115 request re
 heated junction thermocouple reactor vessel level
 measurement sys. Info responds to Question 2 re axial
 spacing.

DISTRIBUTION CODE: B001S COPIES RECEIVED: LTR 1 ENCL 1 SIZE: 4
 TITLE: PSAR/FSAR AMDTS and Related Correspondence

NOTES: J Hanchett 1cy PDR Documents. L Chandler all Amdts. 05000361
 D Scaletti 1cy Enviro Matl.
 J Hanchett 1cy PDR Documents. L Chandler all Amdts. 05000362
 D Scaletti 1cy Enviro Matl.

RECIPIENT			COPIES		RECIPIENT			COPIES	
ID CODE/NAME			LTTR	ENCL	ID CODE/NAME			LTTR	ENCL
A/D LICENSNG			1	0	LIC BR #3 BC			1	0
LIC BR #3 LA			1	0	ROOD, H.	01		1	1
INTERNAL: ELD			1	0	IE	06		1	1
IE/DEP/EPDB	35		1	1	IE/DEP/EPLB	36		3	3
MPA			1	0	NRR/DE/CEB	11		1	1
NRR/DE/EQB	13		3	3	NRR/DE/GB	28		2	2
NRR/DE/HGEB	30		2	2	NRR/DE/MEB	18		1	1
NRR/DE/MTEB	17		1	1	NRR/DE/QAB	21		1	1
NRR/DE/SAB	24		1	1	NRR/DE/SEB	25		1	1
NRR/DHFS/HFEB	40		1	1	NRR/DHFS/LQB	32		1	1
NRR/DHFS/OLB	34		1	1	NRR/DHFS/PTRB	20		1	1
NRR/DSI/AEB	26		1	1	NRR/DSI/ASB	27		1	1
NRR/DSI/CPB	10		1	1	NRR/DSI/CSB	09		1	1
NRR/DSI/ETSB	12		1	1	NRR/DSI/ICSB	16		1	1
NRR/DSI/PSB	19		1	1	NRR/DSI/RAB	22		1	1
NRR/DSI/RSE	23		1	1	NRR/DST/LGB	33		1	1
REG FILE	04		1	1	RGNS			2	2
EXTERNAL: ACRS	41		10	10	BNL (AMDTS ONLY)			1	1
FEMA-REP DIV	39		1	1	LPDR	03		1	1
NRC PDR	02		1	1	NSIC	05		1	1
NTIS			1	1					

TOTAL NUMBER OF COPIES REQUIRED: LTTR 58 ENCL 53

Southern California Edison Company




P. O. BOX 800
2244 WALNUT GROVE AVENUE
ROSEMEAD, CALIFORNIA 91770

K. P. BASKIN
MANAGER OF NUCLEAR ENGINEERING,
SAFETY, AND LICENSING

TELEPHONE
(213) 572-1401

March 25, 1982

Director, Office of Nuclear Reactor Regulation
Attention: Mr. Frank Miraglia, Branch Chief
Licensing Branch No. 3
U. S. Nuclear Regulatory Commission
Washington, D.C. 20555



Gentlemen:

Subject: Docket Nos. 50-361 and 50-362
San Onofre Nuclear Generating Station
Units 2 and 3

The NRC's letter of January 15, 1982 forwarded four (4) questions which requested additional information relative to the Heated Junction Thermocouple (HJTC) reactor vessel level measurement system for San Onofre Units 2 and 3. SCE's letter of March 10, 1980 provided responses to question 1, 3 and 4 and also indicated that the response to question 2 would be provided by March 31, 1982. Consistent with that commitment, enclosed please find seven (7) copies of response to question 2 (NRC Mail Code B026).

If you have any questions or comments concerning the enclosed response, please contact me.

Very truly yours,

KP Baskin

Enclosures

Boo!
s
1/1

8203290292 820325
PDR ADOCK 05000361
P PDR

ENCLOSURE

HJTC Reactor Vessel Level Measurement System San Onofre Units 2 and 3

QUESTION 2

Discuss the axial spacing chosen for the HJTC sensors for Units 2 and 3.

RESPONSE

The HJTC System measures the collapsed water level in the reactor vessel above the Fuel Alignment Plate (FAP). The volume above the FAP in the San Onofre Units 2 and 3 reactor vessels can be pictured as being two separate regions (Figure 1). The region between the FAP and Upper Guide Structure Support Plate (UGSSP) is the upper plenum. The second region, between the UGSSP and the top of the vessel head, is the upper head. The HJTC probe assembly is located outside of a CEA shroud and extends through both these regions.

The HJTC probe assembly for San Onofre Units 2 and 3 is designed to measure the collapsed water level in the upper head independently from the collapsed water level in the upper plenum. This is accomplished by the use of a "split" probe assembly (Figure 2). Functionally, the probe is divided into an upper separator tube in the upper head region and a lower separator tube in the upper plenum region. A divider disk inside the probe located at the UGSSP elevation isolates the upper and lower tubes hydraulically. Holes at the top and bottom of each separator tube allow the collapsed water level in each region to be formed and measured inside the separator tubes.

Therefore, the HJTC sensors are located axially in the probe assembly so that the collapsed water level in each region can be measured. The location of the eight sensors available in each of two probe assemblies are shown in Figure 2. Sensors are placed as high as possible in the upper head and upper plenum to provide an early indication of voiding in each region. A sensor just above the UGSSP indicates when the upper head is completely empty. A sensor placed midway between the upper and lower sensors in the upper head provides increased resolution for the level measurement in the upper head. In the lower separator tube, sensors are placed at the top, centerline, and bottom of the hot leg. These sensors tell the operator when the collapsed water level passes through the hot leg elevation. The final sensor is placed as close as possible to the FAP. This sensor provides an indication that the water inventory above the core in the upper plenum has been depleted and thus, gives an advanced warning of the impending core uncover.

FIGURE 1
SAN ONOFRE 2&3 REACTOR VESSEL

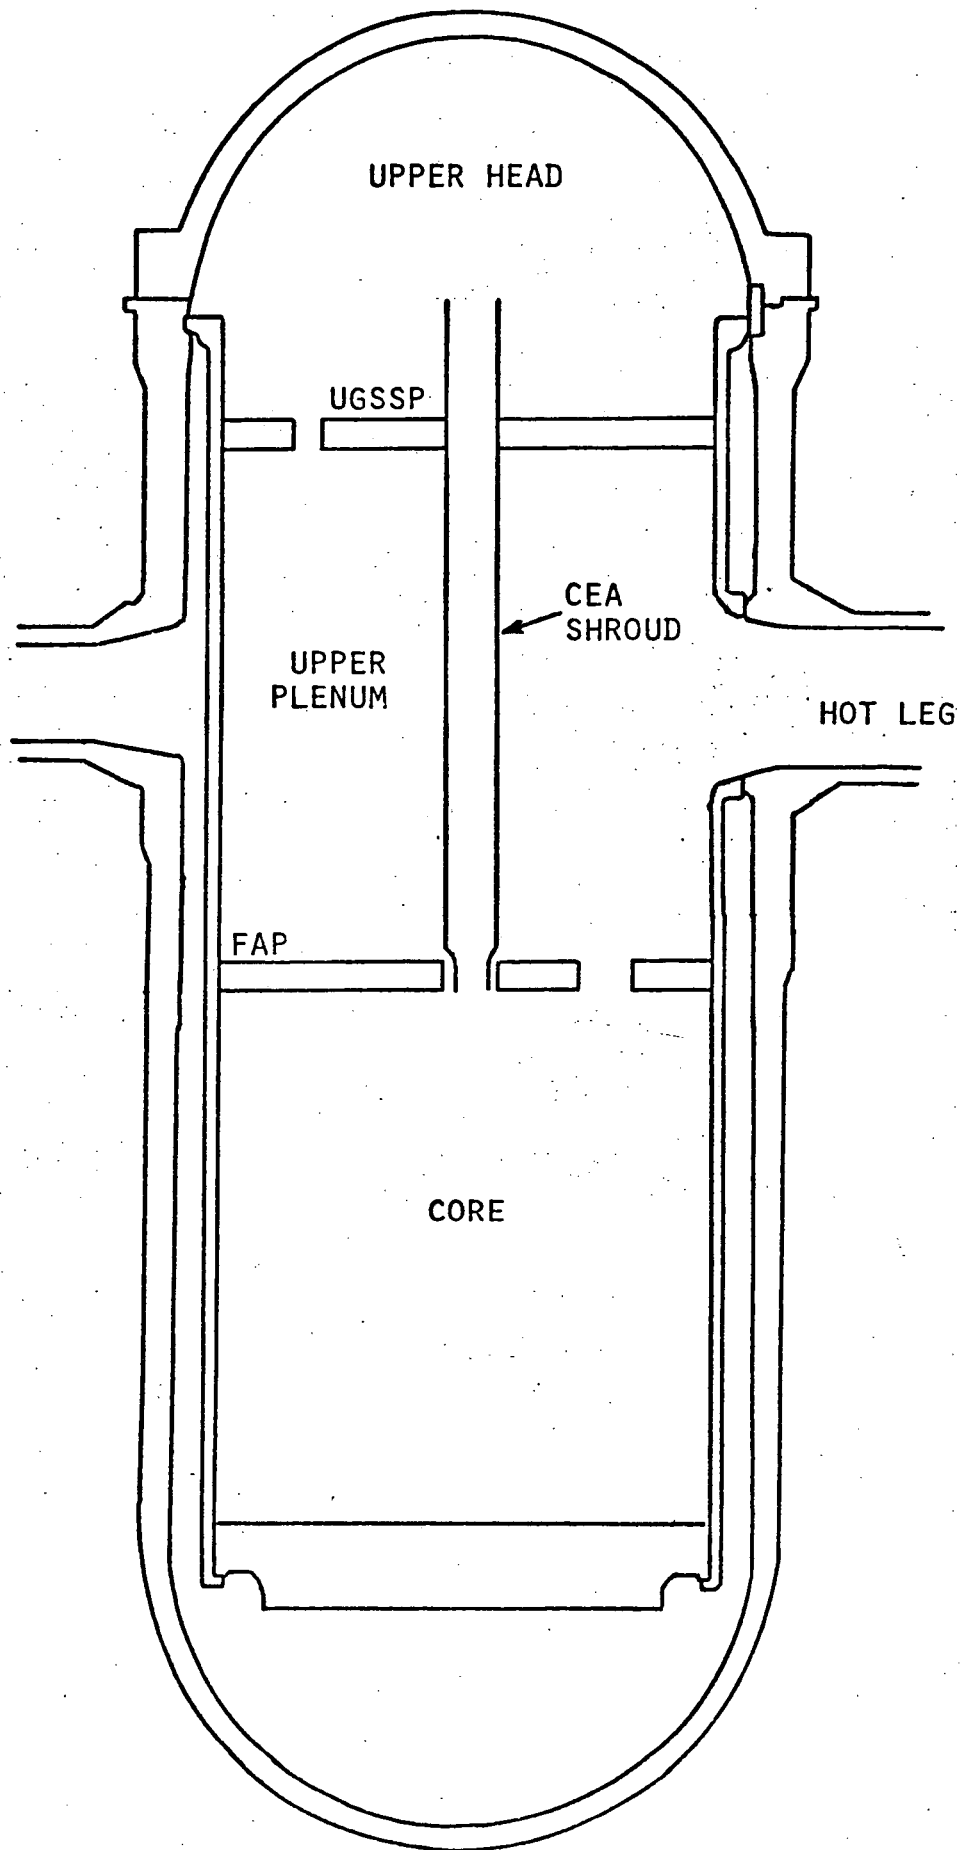


FIGURE 2

SAN ONOFRE 2&3 HJTC SENSOR LOCATIONS

