



South Texas Project Electric Generating Station P.O. Box 289 Wadsworth, Texas 77483

December 5, 2013
NOC-AE-13003058
10CFR50.36

U.S. Nuclear Regulatory Commission
Attention: Document Control Desk
Washington, DC 20555-0001

South Texas Project
Unit 1
Docket No. STN 50-498
Unit 1 Cycle 18 Core Operating Limits Report

In accordance with Technical Specification 6.9.1.6.d, STP Nuclear Operating Company submits the attached Revision 1 to the Core Operating Limits Report for Unit 1 Cycle 18. The Report reflects the changes in Unrodded F_{xy} for each core height from the updated Westinghouse ANC9 code system. The updated F_{xy} values are listed in Table 1 of the attachment.

There are no commitments in this letter.

If there are any questions regarding this report, please contact Ken Taplett at (361) 972-8416 or me at (361) 972-7743.

A handwritten signature in black ink, appearing to read "R F Dunn".

Roland F. Dunn
Manager,
Nuclear Fuel & Analysis

web

Attachment: Unit 1 Cycle 18 Core Operating Limits Report, Rev. 1

Handwritten initials in black ink, reading "A001/URR".

STI: 33793136

cc:

(paper copy)

Regional Administrator, Region IV
U.S. Nuclear Regulatory Commission
1600 East Lamar Boulevard
Arlington, TX 76011-4511

Balwant K. Singal
Senior Project Manager
U.S. Nuclear Regulatory Commission
One White Flint North (MS 8 B1)
11555 Rockville Pike
Rockville, MD 20852

NRC Resident Inspector
U.S. Nuclear Regulatory Commission
P.O. Box 289, Mail Code: MN116
Wadsworth, TX 77483

Jim Collins
City of Austin
Electric Utility Department
721 Barton Springs Road
Austin, TX 78704

(electronic copy)

A.H. Gutterman, Esquire
Morgan, Lewis & Bockius LLP

Balwant K. Singal
U.S. Nuclear Regulatory Commission

John Ragan
Chris O'Hara
Jim von Suskil
NRG South Texas LP

Kevin Pollo
Richard Peña
City Public Service

Peter Nemeth
Crain Caton & James, P.C.

C. Mele
City of Austin

Richard A. Ratliff
Robert Free
Texas Department of State Health Services



SOUTH TEXAS PROJECT

Unit 1 Cycle 18

CORE OPERATING LIMITS REPORT

Revision 1

1.0 CORE OPERATING LIMITS REPORT

This Core Operating Limits Report for STPEGS Unit 1 Cycle 18 has been prepared in accordance with the requirements of Technical Specification 6.9.1.6. The core operating limits have been developed using the NRC-approved methodologies specified in Technical Specification 6.9.1.6.

The Technical Specifications affected by this report are:

- 1) 2.1 SAFETY LIMITS
- 2) 2.2 LIMITING SAFETY SYSTEM SETTINGS
- 3) 3/4.1.1.1 SHUTDOWN MARGIN
- 4) 3/4.1.1.3 MODERATOR TEMPERATURE COEFFICIENT LIMITS
- 5) 3/4.1.3.5 SHUTDOWN ROD INSERTION LIMITS
- 6) 3/4.1.3.6 CONTROL ROD INSERTION LIMITS
- 7) 3/4.2.1 AFD LIMITS
- 8) 3/4.2.2 HEAT FLUX HOT CHANNEL FACTOR
- 9) 3/4.2.3 NUCLEAR ENTHALPY RISE HOT CHANNEL FACTOR
- 10) 3/4.2.5 DNB PARAMETERS

2.0 OPERATING LIMITS

The cycle-specific parameter limits for the specifications listed in Section 1.0 are presented below.

2.1 SAFETY LIMITS (Specification 2.1):

- 2.1.1 The combination of THERMAL POWER, pressurizer pressure, and the highest operating loop coolant temperature (T_{avg}) shall not exceed the limits shown in Figure 1.

2.2 LIMITING SAFETY SYSTEM SETTINGS (Specification 2.2):

- 2.2.1 The Loop design flow for Reactor Coolant Flow-Low is 98,000 gpm.

2.2.2 The Over-temperature ΔT and Over-power ΔT setpoint parameter values are listed below:

Over-temperature ΔT Setpoint Parameter Values

- τ_1 measured reactor vessel ΔT lead/lag time constant, $\tau_1 = 8$ sec
- τ_2 measured reactor vessel ΔT lead/lag time constant, $\tau_2 = 3$ sec
- τ_3 measured reactor vessel ΔT lag time constant, $\tau_3 = 2$ sec
- τ_4 measured reactor vessel average temperature lead/lag time constant, $\tau_4 = 28$ sec
- τ_5 measured reactor vessel average temperature lead/lag time constant, $\tau_5 = 4$ sec
- τ_6 measured reactor vessel average temperature lag time constant, $\tau_6 = 2$ sec
- K_1 Overtemperature ΔT reactor trip setpoint, $K_1 = 1.14$
- K_2 Overtemperature ΔT reactor trip setpoint T_{avg} coefficient, $K_2 = 0.028/^\circ\text{F}$
- K_3 Overtemperature ΔT reactor trip setpoint pressure coefficient, $K_3 = 0.00143/\text{psig}$
- T' Nominal full power T_{avg} , $T' \leq 592.0$ $^\circ\text{F}$
- P' Nominal RCS pressure, $P' = 2235$ psig
- $f_1(\Delta I)$ is a function of the indicated difference between top and bottom detectors of the power-range neutron ion chambers; with gains to be selected based on measured instrument response during plant startup tests such that:
 - (1) For $q_t - q_b$ between -70% and $+8\%$, $f_1(\Delta I) = 0$, where q_t and q_b are percent RATED THERMAL POWER in the top and bottom halves of the core respectively, and $q_t + q_b$ is total THERMAL POWER in percent of RATED THERMAL POWER;
 - (2) For each percent that the magnitude of $q_t - q_b$ exceeds -70% , the ΔT Trip Setpoint shall be automatically reduced by 0.0% of its value at RATED THERMAL POWER; and
 - (3) For each percent that the magnitude of $q_t - q_b$ exceeds $+8\%$, the ΔT Trip Setpoint shall be automatically reduced by 2.65% of its value at RATED THERMAL POWER.

Over-power ΔT Setpoint Parameter Values

- τ_1 measured reactor vessel ΔT lead/lag time constant, $\tau_1 = 8$ sec
- τ_2 measured reactor vessel ΔT lead/lag time constant, $\tau_2 = 3$ sec
- τ_3 measured reactor vessel ΔT lag time constant, $\tau_3 = 2$ sec
- τ_6 measured reactor vessel average temperature lag time constant, $\tau_6 = 2$ sec
- τ_7 Time constant utilized in the rate-lag compensator for T_{avg} , $\tau_7 = 10$ sec
- K_4 Overpower ΔT reactor trip setpoint, $K_4 = 1.08$
- K_5 Overpower ΔT reactor trip setpoint T_{avg} rate/lag coefficient, $K_5 = 0.02/^\circ\text{F}$ for increasing average temperature, and $K_5 = 0$ for decreasing average temperature
- K_6 Overpower ΔT reactor trip setpoint T_{avg} heatup coefficient $K_6 = 0.002/^\circ\text{F}$ for $T > T''$, and $K_6 = 0$ for $T \leq T''$
- T'' Indicated full power T_{avg} , $T'' \leq 592.0$ $^\circ\text{F}$
- $f_2(\Delta I) = 0$ for all (ΔI)

2.3 SHUTDOWN MARGIN (Specification 3.1.1.1):

The SHUTDOWN MARGIN shall be:

- 2.3.1 Greater than 1.3% $\Delta\rho$ for MODES 1 and 2*
*See Special Test Exception 3.10.1
- 2.3.2 Greater than the limits in Figure 2 for MODES 3 and 4.
- 2.3.3 Greater than the limits in Figure 3 for MODE 5.

2.4 MODERATOR TEMPERATURE COEFFICIENT (Specification 3.1.1.3):

- 2.4.1 The BOL, ARO, MTC shall be less positive than the limits shown in Figure 4.
- 2.4.2 The EOL, ARO, HFP, MTC shall be less negative than -62.6 pcm/°F.
- 2.4.3 The 300 ppm, ARO, HFP, MTC shall be less negative than -53.6 pcm/°F (300 ppm Surveillance Limit).

Where: BOL stands for Beginning-of-Cycle Life,
EOL stands for End-of-Cycle Life,
ARO stands for All Rods Out,
HFP stands for Hot Full Power (100% RATED THERMAL POWER),
HFP vessel average temperature is 592 °F.

- 2.4.4 The Revised Predicted near-EOL 300 ppm MTC shall be calculated using the algorithm from the document referenced by Technical Specification 6.9.1.6.b.10:

Revised Predicted MTC = Predicted MTC + AFD Correction - 3 pcm/°F

If the Revised Predicted MTC is less negative than the COLR Section 2.4.3 limit and all of the benchmark data contained in the surveillance procedure are met, then an MTC measurement in accordance with S.R. 4.1.1.3b is not required.

2.5 ROD INSERTION LIMITS (Specification 3.1.3.5 and 3.1.3.6):

- 2.5.1 All banks shall have the same Full Out Position (FOP) of either 258 or 259 steps withdrawn.
- 2.5.2 The Control Banks shall be limited in physical insertion as specified in Figure 5.
- 2.5.3 Individual Shutdown bank rods are fully withdrawn when the Bank Demand Indication is at the FOP and the Rod Group Height Limiting Condition for Operation is satisfied (T.S. 3.1.3.1).

2.6 AXIAL FLUX DIFFERENCE (Specification 3.2.1):

- 2.6.1 AFD limits as required by Technical Specification 3.2.1 are determined by Constant Axial Offset Control (CAOC) Operations with an AFD target band of +5, -10%.
- 2.6.2 The AFD shall be maintained within the ACCEPTABLE OPERATION portion of Figure 6, as required by Technical Specifications.

2.7 HEAT FLUX HOT CHANNEL FACTOR (Specification 3.2.2):

- 2.7.1 $F_Q^{RTP} = 2.55$.
- 2.7.2 $K(Z)$ is provided in Figure 7.
- 2.7.3 The F_{xy} limits for RATED THERMAL POWER (F_{xy}^{RTP}) within specific core planes shall be:
 - 2.7.3.1 Less than or equal to 2.102 for all cycle burnups for all core planes containing Bank "D" control rods, and
 - 2.7.3.2 Less than or equal to the appropriate core height-dependent value from Table 1 for all unrodded core planes.
 - 2.7.3.3 $PF_{xy} = 0.2$.

These F_{xy} limits were used to confirm that the heat flux hot channel factor $F_Q(Z)$ will be limited by Technical Specification 3.2.2 assuming the most-limiting axial power distributions expected to result for the insertion and removal of Control Banks C and D during operation, including the accompanying variations in the axial xenon and power distributions, as described in WCAP-8385. Therefore, these F_{xy} limits provide assurance that the initial conditions assumed in the LOCA analysis are met, along with the ECCS acceptance criteria of 10 CFR 50.46.

2.7.4 Core Power Distribution Measurement Uncertainty for the Heat Flux Hot Channel Factor

- 2.7.4.1 If the Power Distribution Monitoring System (PDMS) is operable, as defined in the Technical Requirements Manual Section 3.3.3.12, the core power distribution measurement uncertainty (U_{FQ}) to be applied to the $F_Q(Z)$ and $F_{xy}(Z)$ using the PDMS shall be calculated by:

$$U_{FQ} = (1.0 + (U_Q/100)) * U_E$$

Where:

U_Q = Uncertainty for power peaking factor as defined in Equation 5-19 from the document referenced by Technical Specification 6.9.1.6.b.11.

U_E = Engineering uncertainty factor of 1.03.

This uncertainty is calculated and applied automatically by the BEACON computer code.

- 2.7.4.2 If the moveable detector system is used, the core power distribution measurement uncertainty (U_{FQ}) to be applied to the $F_Q(Z)$ and $F_{xy}(Z)$ shall be calculated by:

$$U_{FQ} = U_{QU} * U_E$$

Where:

U_{QU} = Base F_Q measurement uncertainty of 1.05.

U_E = Engineering uncertainty factor of 1.03.

2.8 ENTHALPY RISE HOT CHANNEL FACTOR (Specification 3.2.3):

2.8.1 $F_{\Delta H}^{RTP} = 1.62^1$

2.8.2 $PF_{\Delta H} = 0.3$

- 2.8.3 Core Power Distribution Measurement Uncertainty for the Enthalpy Rise Hot Channel Factor

- 2.8.3.1 If the Power Distribution Monitoring System (PDMS) is operable, as defined in the Technical Requirements Manual Section 3.3.3.12, the core power distribution measurement uncertainty ($U_{F\Delta H}$) to be applied to the $F_{\Delta H}^N$ using the PDMS shall be the greater of:

$$U_{F\Delta H} = 1.04$$

OR

$$U_{F\Delta H} = 1.0 + (U_{\Delta H}/100)$$

Where:

$U_{\Delta H}$ = Uncertainty for power peaking factor as defined in Equation 5-19 from the document referenced by Technical Specification 6.9.1.6.b.11.

This uncertainty is calculated and applied automatically by the power distribution monitoring system.

- 2.8.3.2 If the moveable detector system is used, the core power distribution measurement uncertainty ($U_{F\Delta H}$) shall be:

$$U_{F\Delta H} = 1.04$$

¹ Applies to all fuel in the Unit 1 Cycle 18 Core.

2.9 DNB PARAMETERS (Specification 3.2.5):

- 2.9.1 The following DNB-related parameters shall be maintained within the following limits:¹
- 2.9.1.1 Reactor Coolant System $T_{avg} \leq 595\text{ }^{\circ}\text{F}$ ²,
 - 2.9.1.2 Pressurizer Pressure $> 2200\text{ psig}$ ³,
 - 2.9.1.3 Minimum Measured Reactor Coolant System Flow $> 403,000\text{ gpm}$ ⁴.

3.0 REFERENCES

- 3.1 Letter from J. M. Ralston (Westinghouse) to D. F. Hoppes (STPNOC), "South Texas Project Electric Generating Station Unit 1 Cycle 18 Final Reload Evaluation" NF-TG-12-68 (ST-UB-NOC-12003275) dated August 13, 2012.
- 3.2 NUREG-1346, Technical Specifications, South Texas Project Unit Nos. 1 and 2.
- 3.3 STPNOC Calculation ZC-7035, Rev. 2, "Loop Uncertainty Calculation for RCS Tavg Instrumentation," Section 10.1.
- 3.4 STPNOC Calculation ZC-7032, Rev. 4, "Loop Uncertainty Calculation for Narrow Range Pressurizer Pressure Monitoring Instrumentation," Section 2.3, Page 9.
- 3.5 5Z529ZB01025 Rev. 4, Design Basis Document, Technical Specifications /LCO, Tech Spec Section 3.2.5.c
- 3.6 Document RSE-U1, Rev.1, "Unit 1 Cycle 18 Reload Safety Evaluation and Core Operating Limits Report". CR 12-23998-16
- 3.7 Letter from J. M. Ralston (Westinghouse) to D. F. Hoppes (STPNOC), "South Texas Project Electric Generating Station Unit 1 Confirmation of Requirements for the ANC9/BEACON 7 Mid-Cycle Implementation for South Texas Unit 1 (TGX) Cycle 18" NF-TG-13-73 (ST-UB-NOC-13003359) dated October 22, 2013

¹ A discussion of the processes to be used to take these readings is provided in the basis for Technical Specification 3.2.5.

² Includes a 1.9 °F measurement uncertainty per Reference 3.3, Page 37.

³ Limit not applicable during either a Thermal Power ramp in excess of 5% of RTP per minute or a Thermal Power step in excess of 10% RTP. Per Technical Specification 3.2.5 Bases this includes a 10.7 psi measurement uncertainty as read on QDPS display, which is bounded by the 9.6 psi averaged measurement uncertainty calculated in Reference 3.4.

⁴ Includes the most limiting flow measurement uncertainty of 2.8% from Reference 3.5.

Figure 1

Reactor Core Safety Limits - Four Loops in Operation

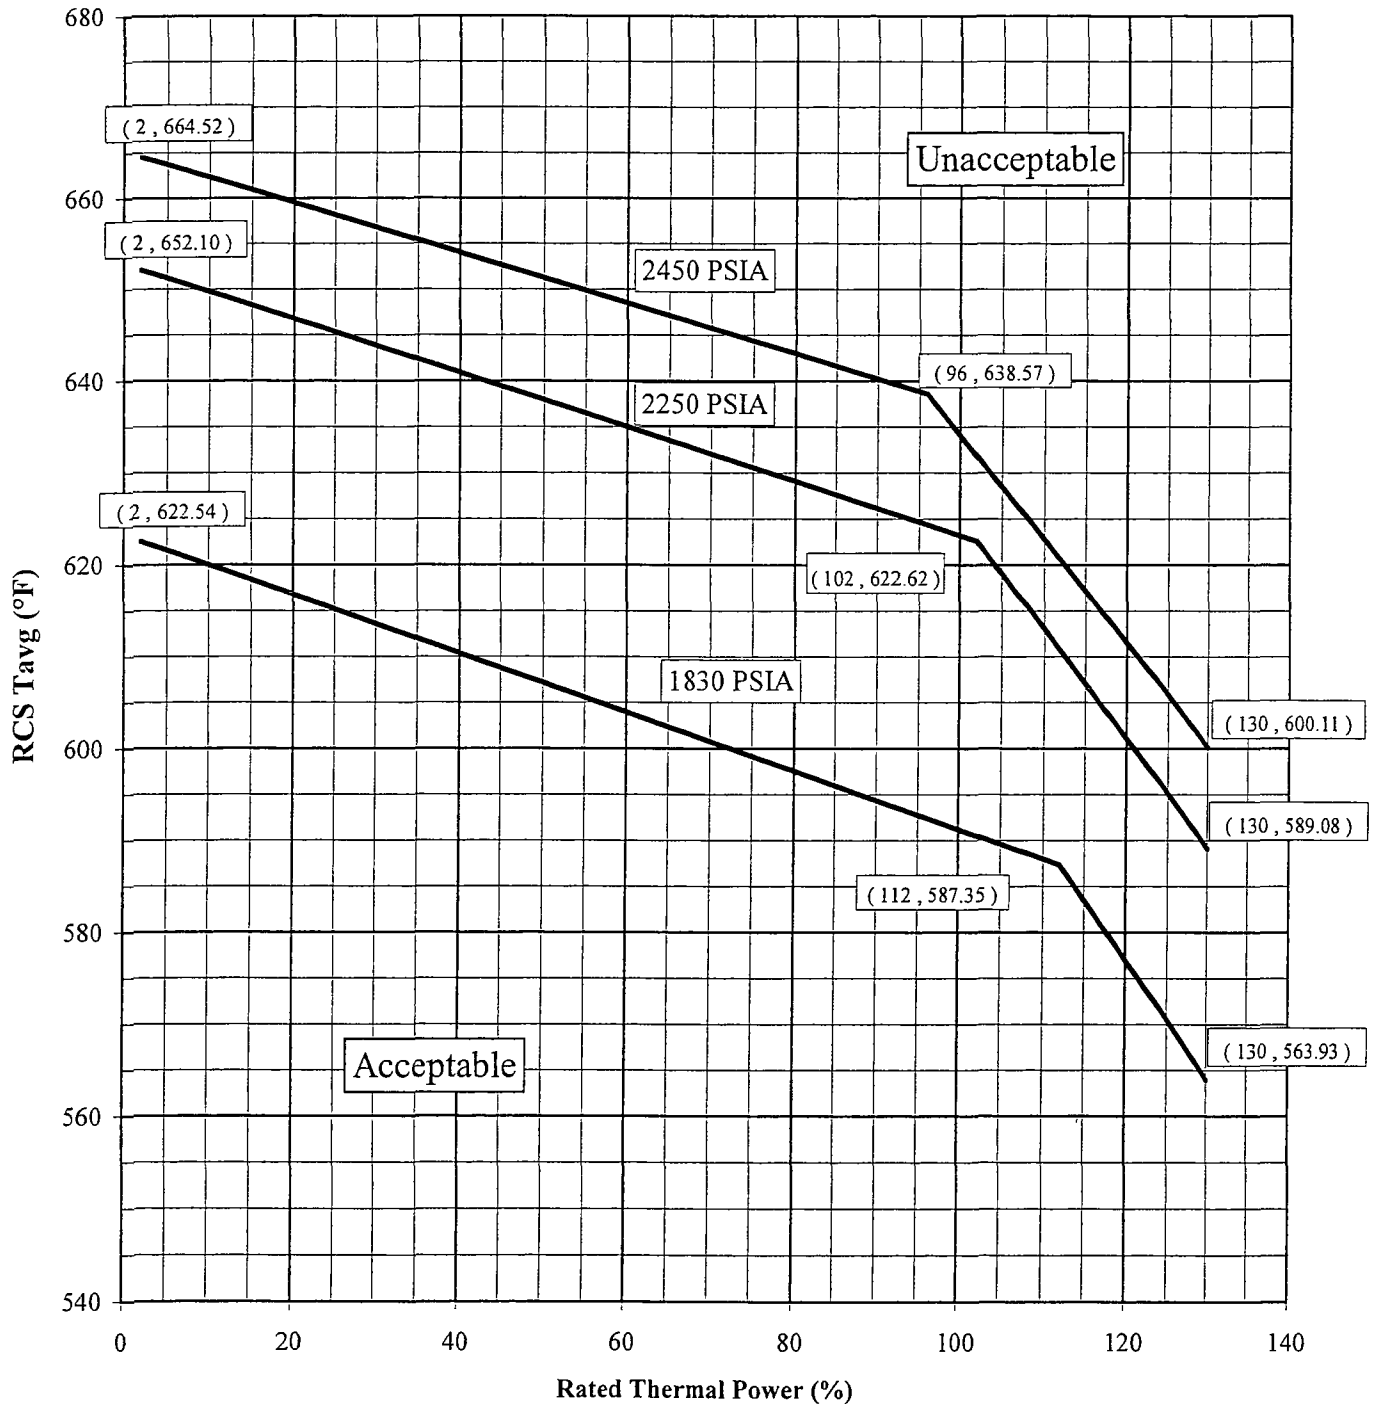


Figure 2

Required Shutdown Margin for Modes 3 & 4

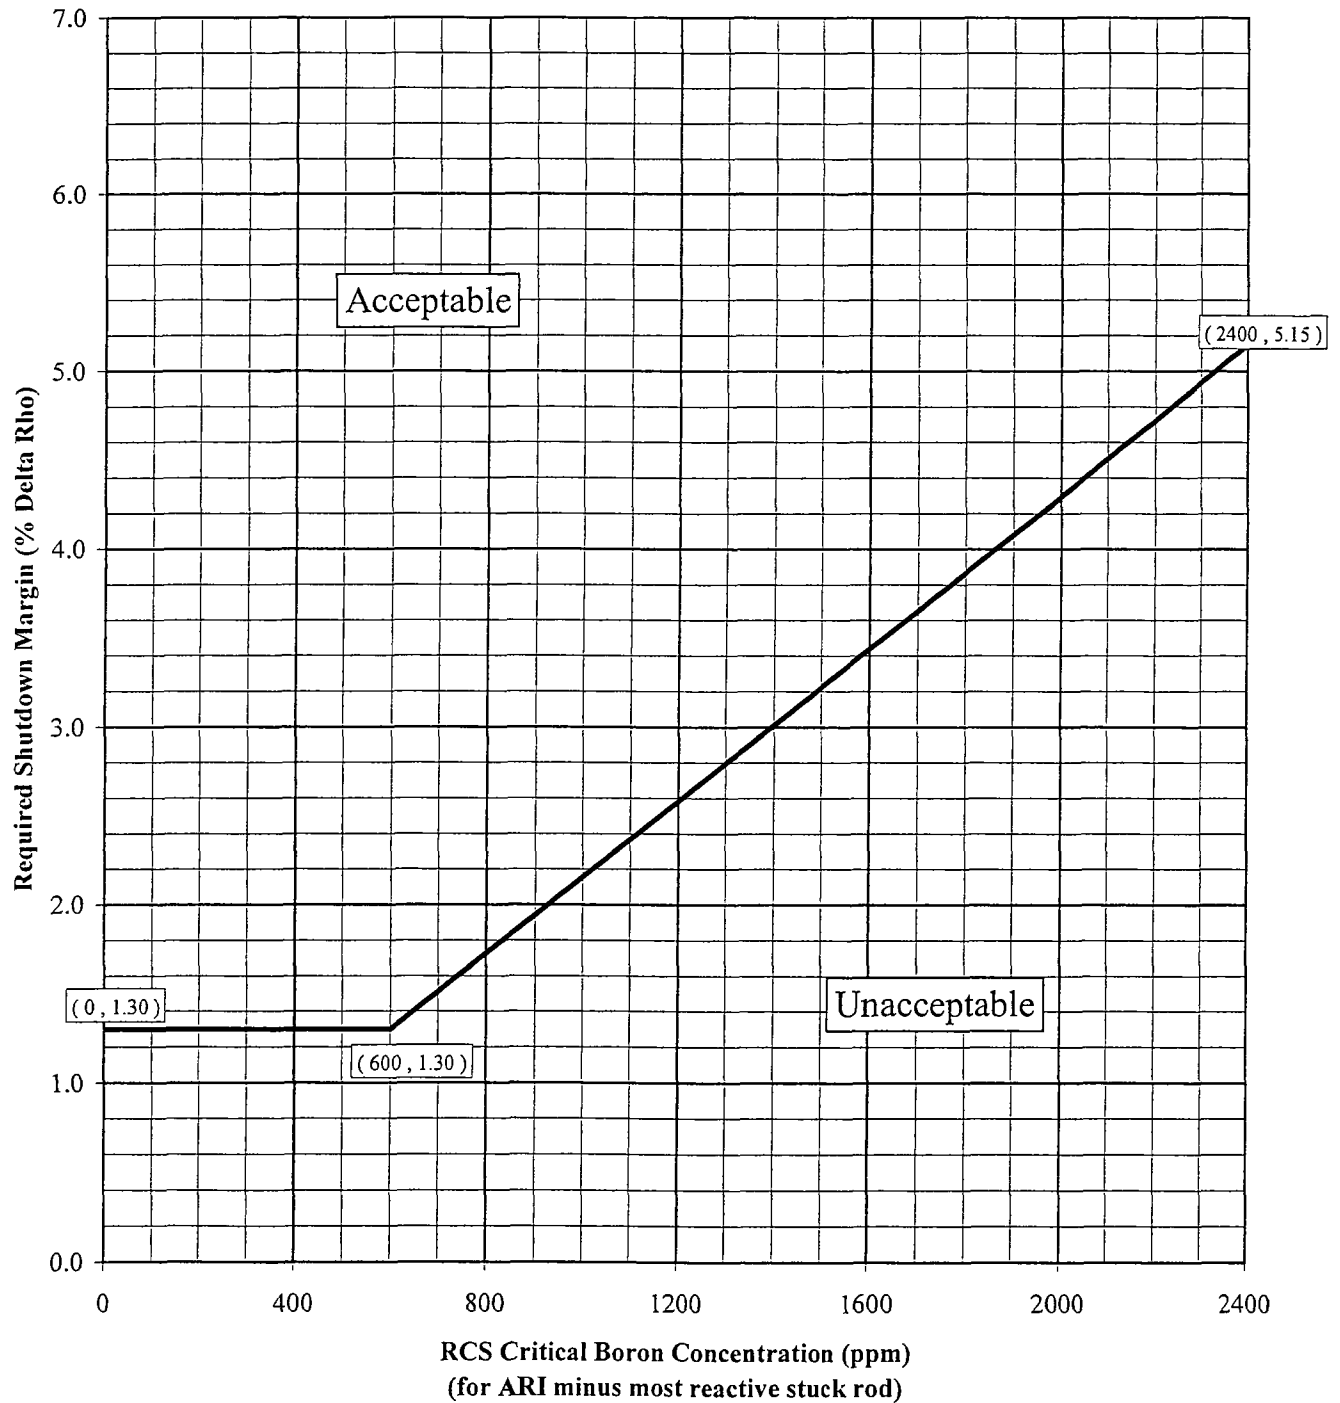


Figure 3

Required Shutdown Margin for Mode 5

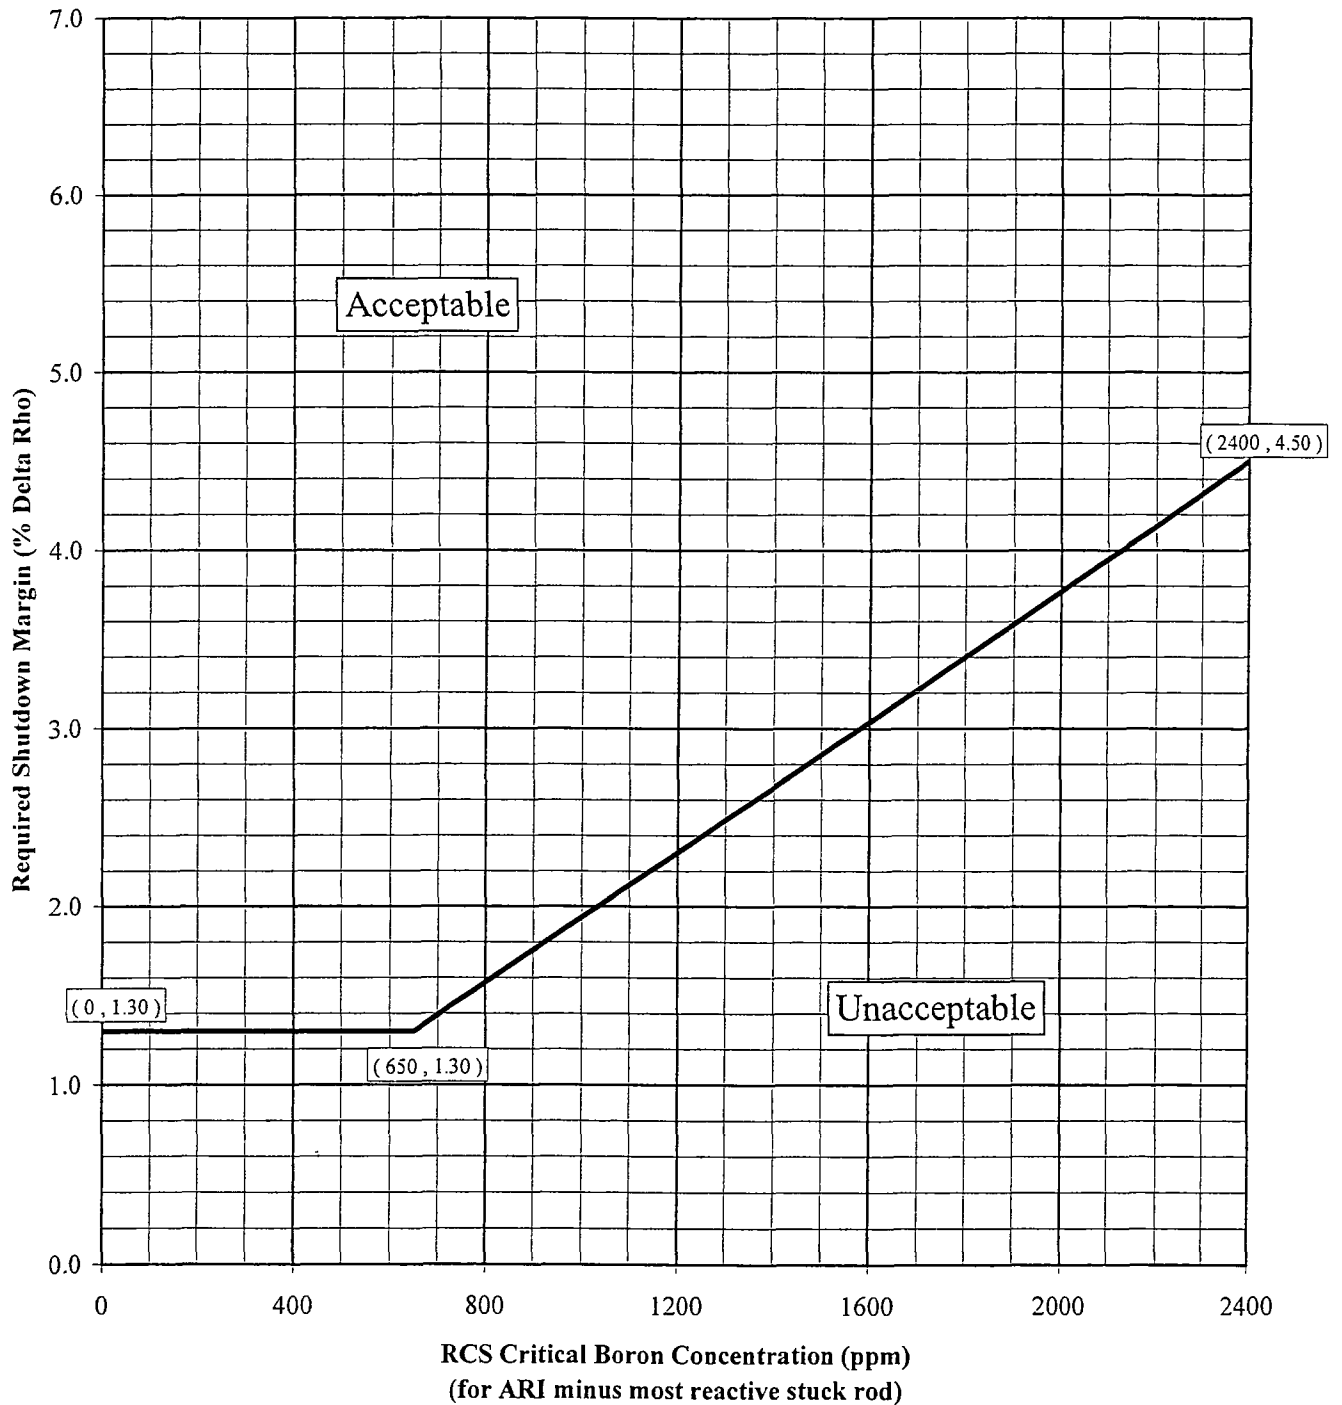


Figure 4

MTC versus Power Level

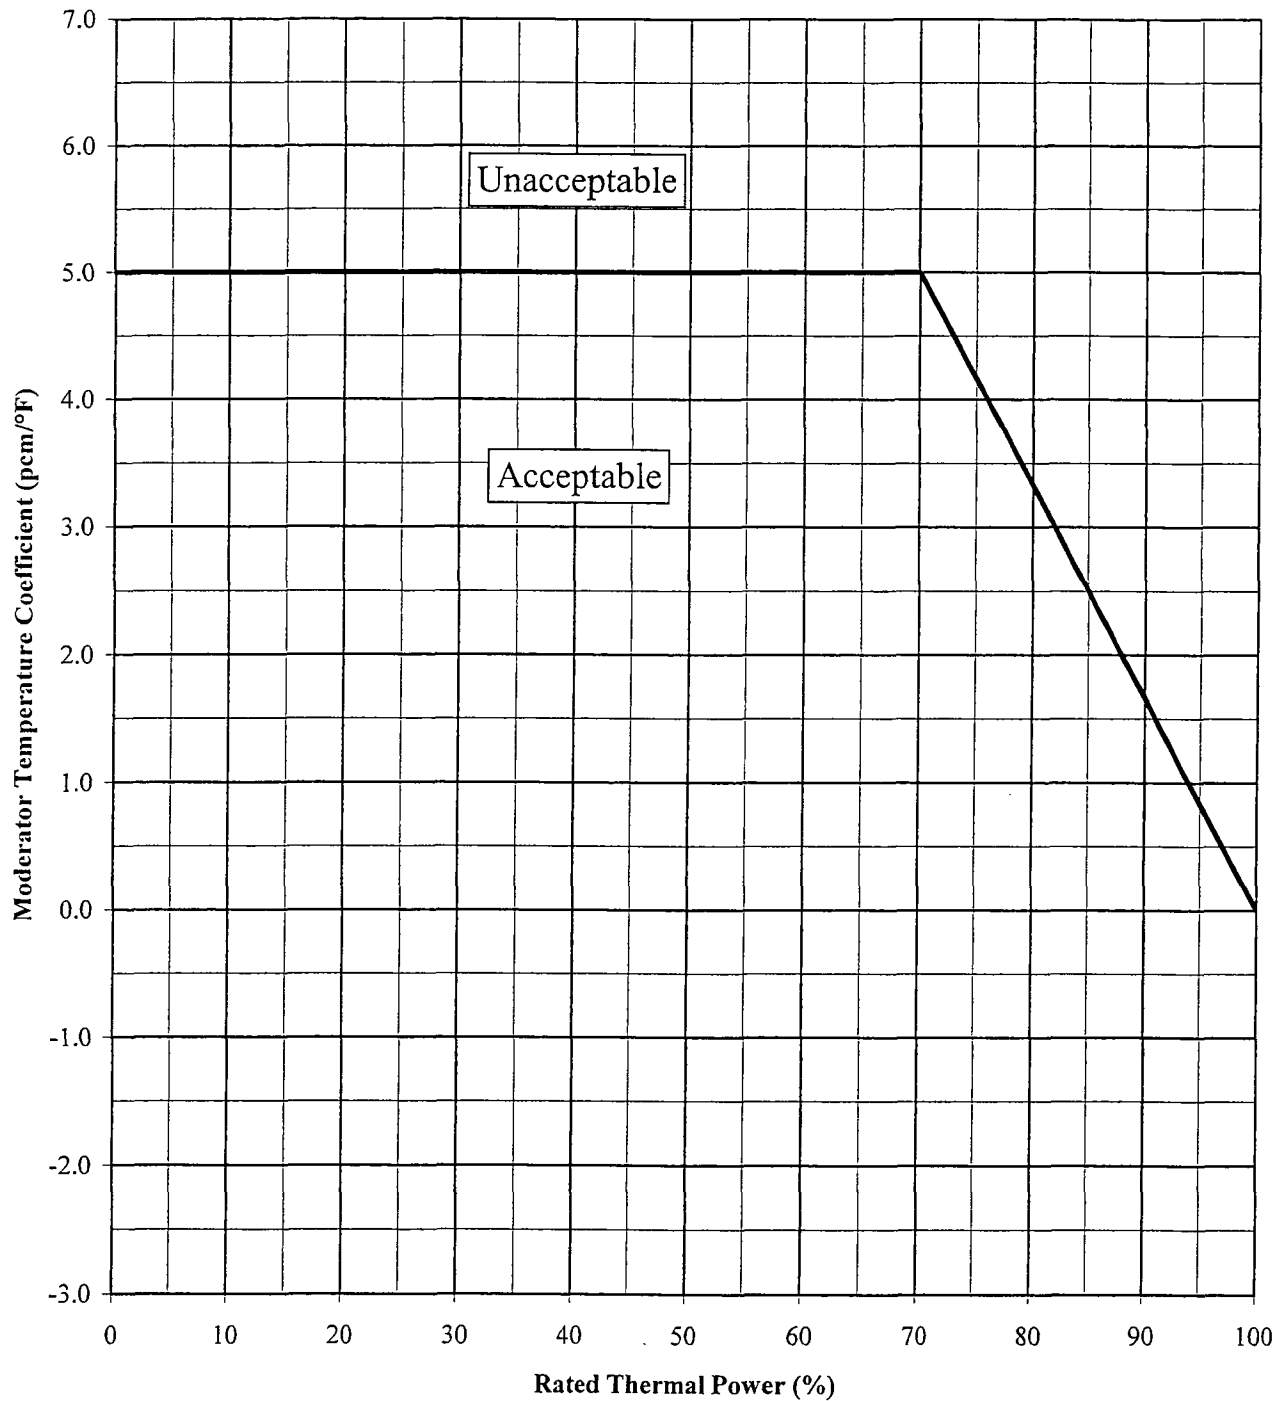


Figure 5

Control Rod Insertion Limits* versus Power Level

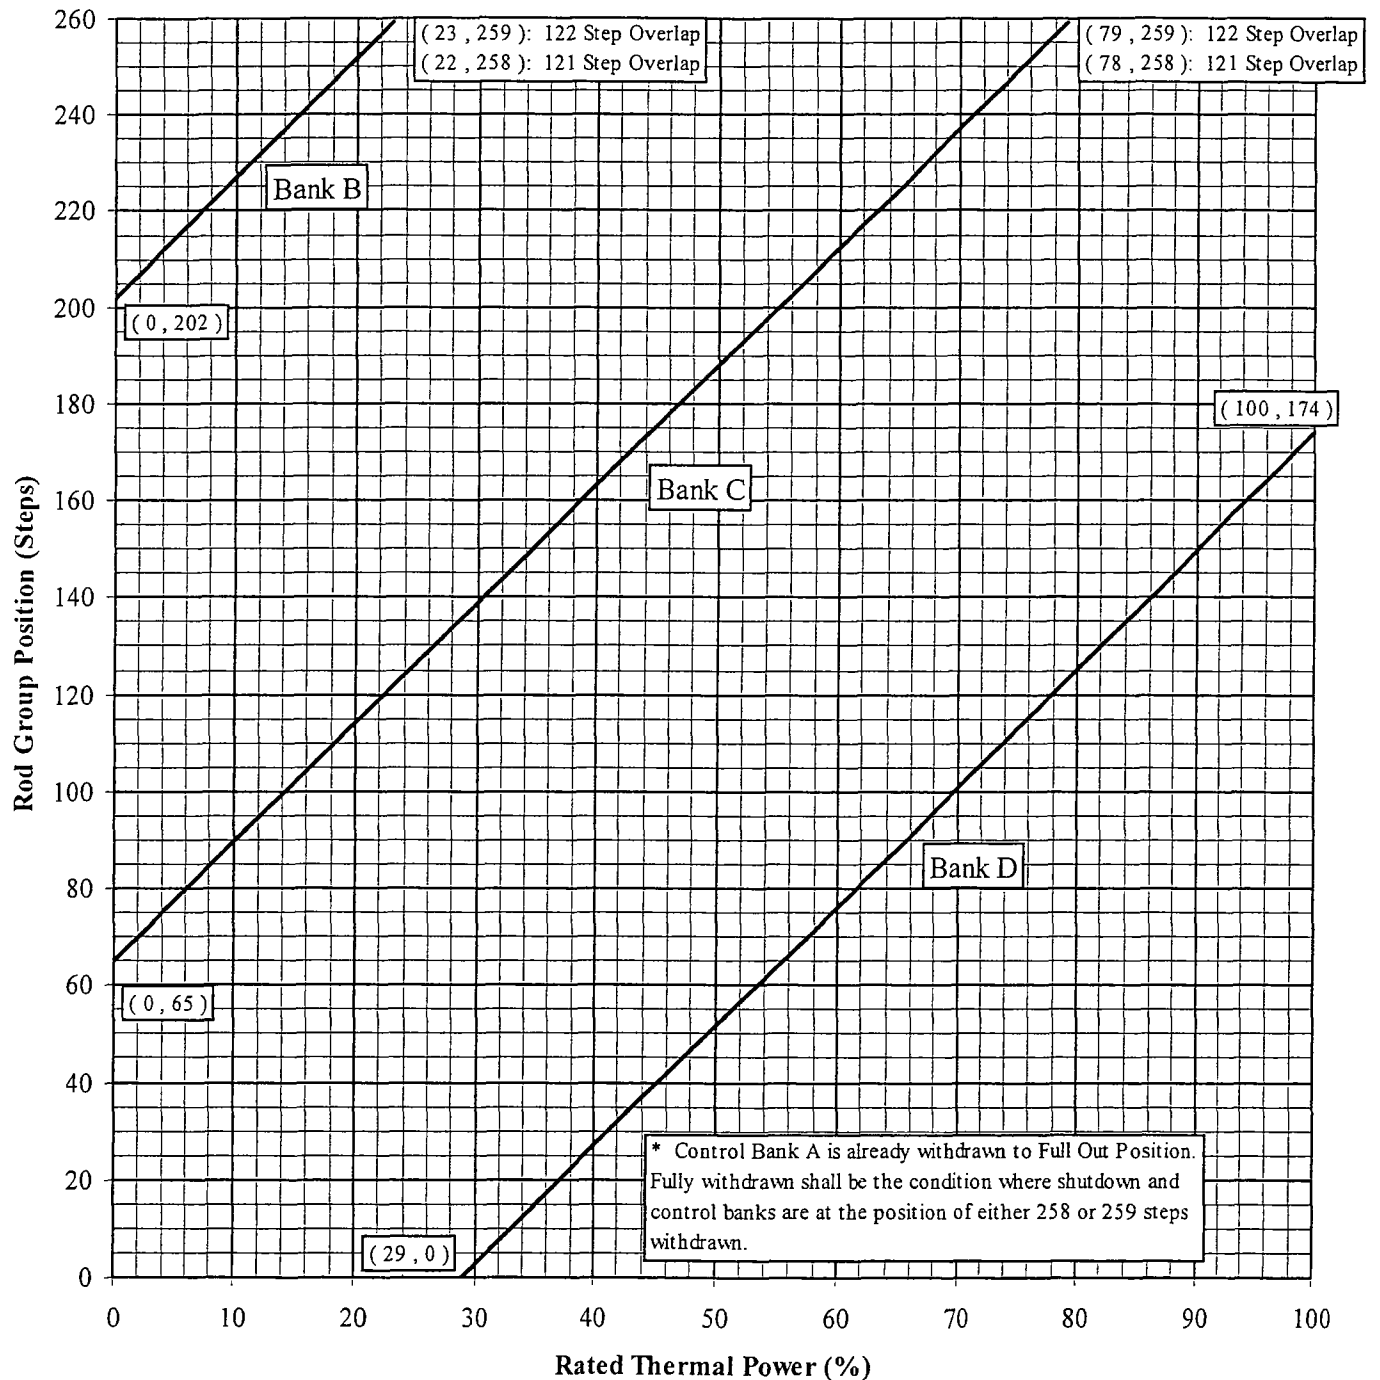


Figure 6

AFD Limits versus Power Level

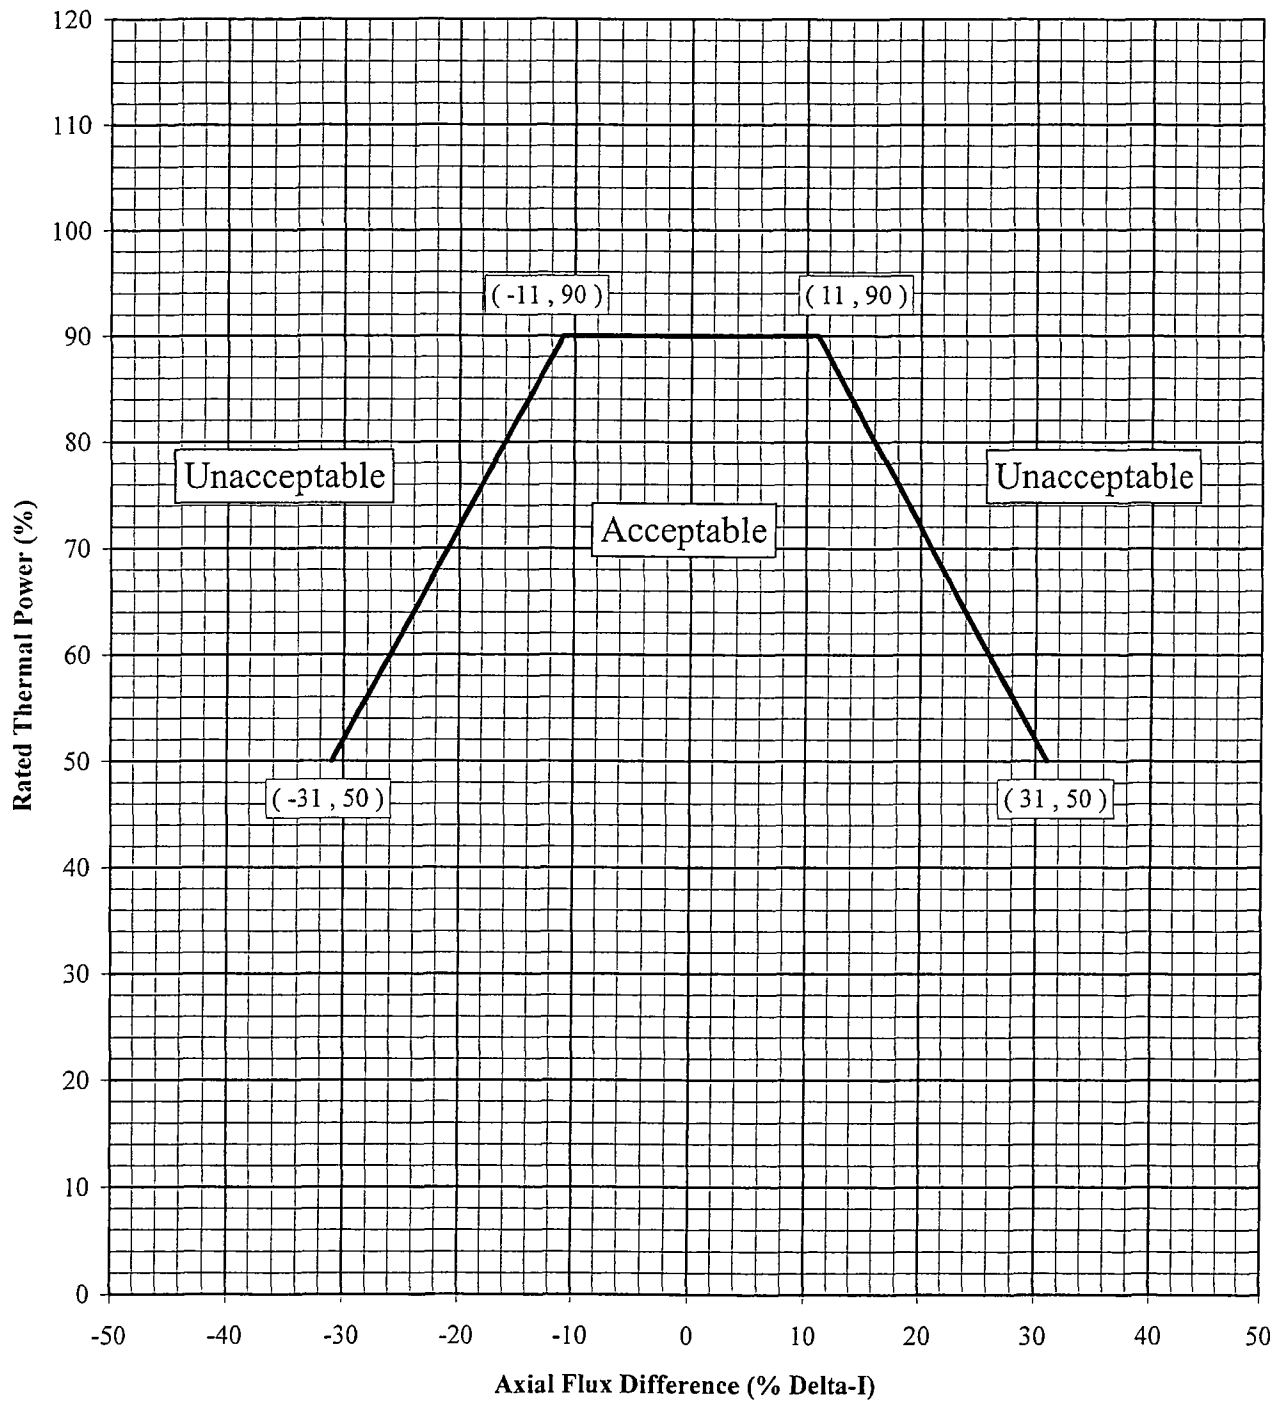


Figure 7

K(Z) - Normalized FQ(Z) versus Core Height

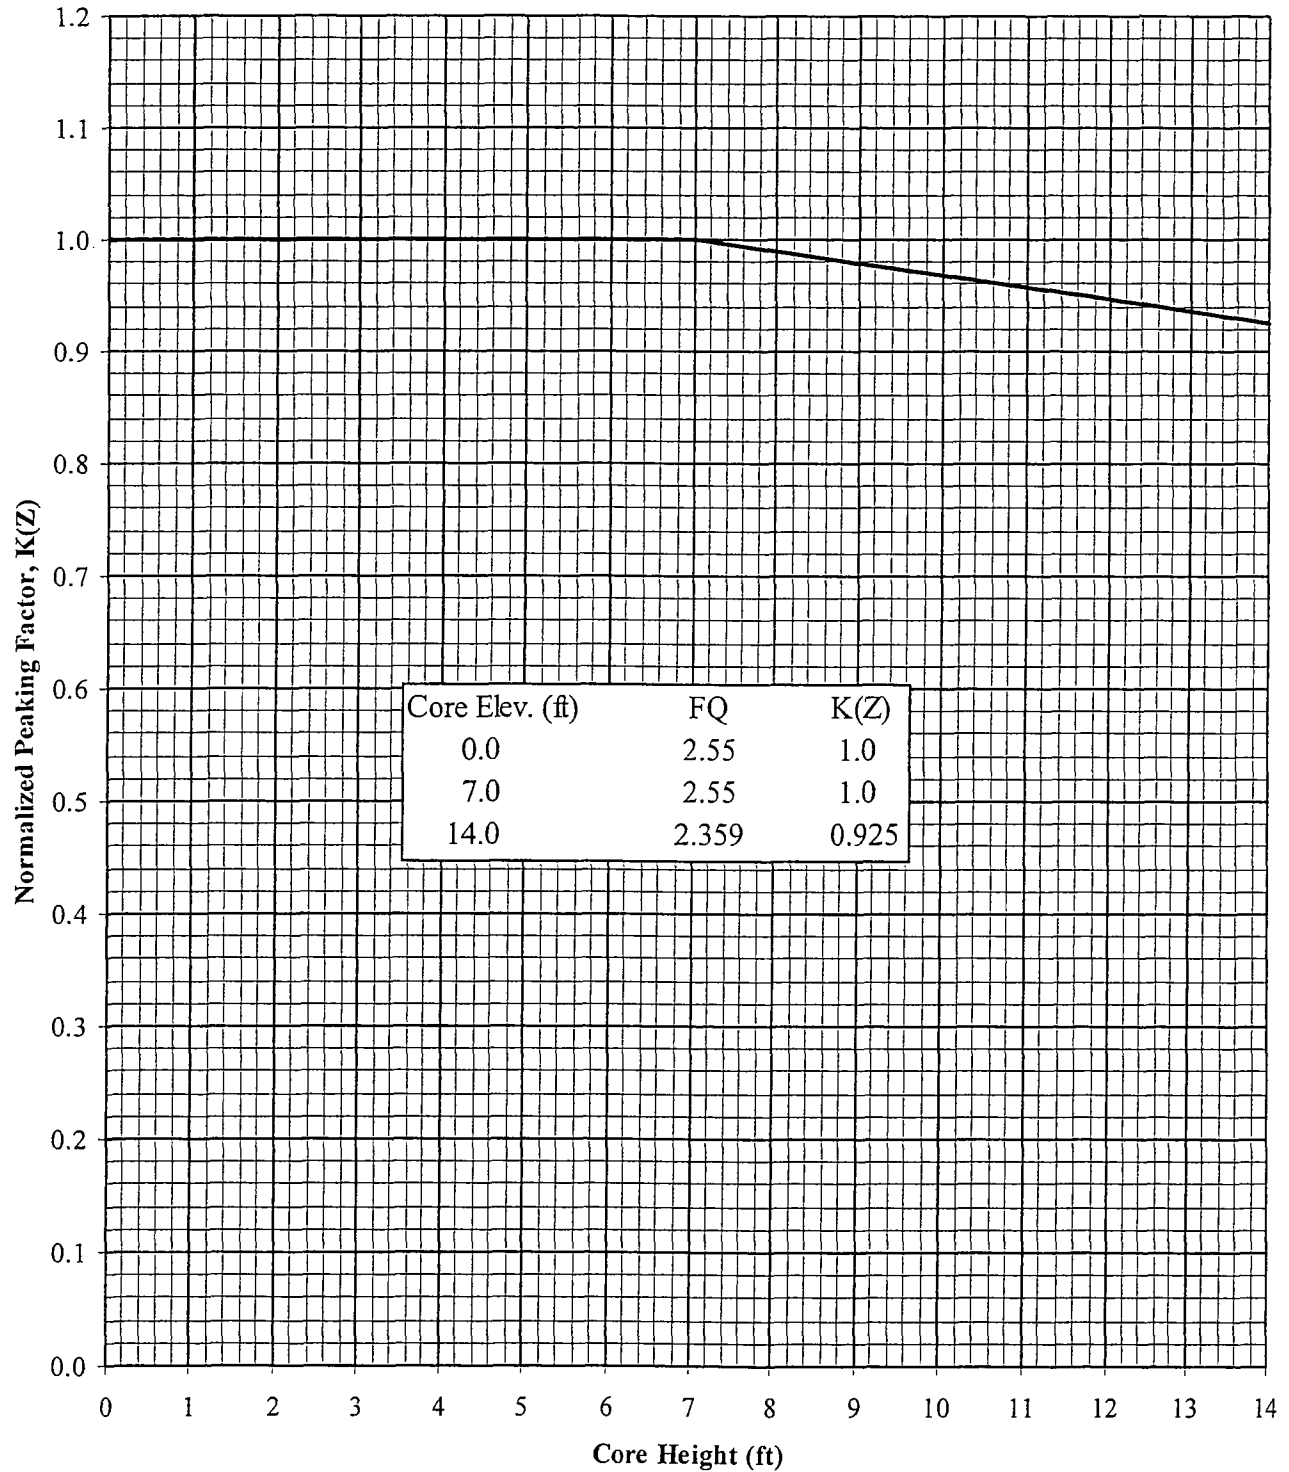


Table 1 (Part 1 of 2)
Unrodded F_{xy} for Each Core Height
for Cycle Burnups Less Than 10000 MWD/MTU

Core Height (Ft.)	Axial Point	Unrodded F_{xy}	Core Height (Ft.)	Axial Point	Unrodded F_{xy}
14.00	1	11.503	6.80	37	1.894
13.80	2	8.767	6.60	38	1.930
13.60	3	6.030	6.40	39	1.923
13.40	4	3.573	6.20	40	1.888
13.20	5	2.768	6.00	41	1.869
13.00	6	2.407	5.80	42	1.872
12.80	7	2.237	5.60	43	1.880
12.60	8	2.156	5.40	44	1.888
12.40	9	2.079	5.20	45	1.915
12.20	10	2.029	5.00	46	1.956
12.00	11	2.002	4.80	47	1.971
11.80	12	2.001	4.60	48	1.937
11.60	13	2.026	4.40	49	1.899
11.40	14	2.032	4.20	50	1.909
11.20	15	2.008	4.00	51	1.913
11.00	16	1.984	3.80	52	1.920
10.80	17	1.967	3.60	53	1.940
10.60	18	1.950	3.40	54	1.983
10.40	19	1.937	3.20	55	2.019
10.20	20	1.944	3.00	56	1.969
10.00	21	1.972	2.80	57	1.933
9.80	22	1.993	2.60	58	1.927
9.60	23	1.966	2.40	59	1.927
9.40	24	1.946	2.20	60	1.932
9.20	25	1.950	2.00	61	1.968
9.00	26	1.955	1.80	62	2.044
8.80	27	1.959	1.60	63	2.067
8.60	28	1.969	1.40	64	1.997
8.40	29	1.980	1.20	65	2.001
8.20	30	2.012	1.00	66	2.076
8.00	31	1.993	0.80	67	2.442
7.80	32	1.960	0.60	68	3.213
7.60	33	1.940	0.40	69	4.694
7.40	34	1.915	0.20	70	6.578
7.20	35	1.889	0.00	71	7.318
7.00	36	1.872			

Table 1 (Part 2 of 2)
Unrodded Fxy for Each Core Height
for Cycle Burnups Greater Than or Equal to 10000 MWD/MTU

Core Height (Ft.)	Axial Point	Unrodded Fxy	Core Height (Ft.)	Axial Point	Unrodded Fxy
14.00	1	3.618	6.80	37	2.111
13.80	2	3.456	6.60	38	2.160
13.60	3	3.294	6.40	39	2.153
13.40	4	3.111	6.20	40	2.126
13.20	5	2.798	6.00	41	2.111
13.00	6	2.407	5.80	42	2.106
12.80	7	2.163	5.60	43	2.098
12.60	8	2.067	5.40	44	2.086
12.40	9	2.030	5.20	45	2.099
12.20	10	2.034	5.00	46	2.133
12.00	11	2.020	4.80	47	2.133
11.80	12	2.020	4.60	48	2.078
11.60	13	2.053	4.40	49	2.031
11.40	14	2.072	4.20	50	2.025
11.20	15	2.053	4.00	51	2.013
11.00	16	2.035	3.80	52	1.997
10.80	17	2.029	3.60	53	1.992
10.60	18	2.032	3.40	54	2.015
10.40	19	2.031	3.20	55	2.048
10.20	20	2.055	3.00	56	1.981
10.00	21	2.097	2.80	57	1.905
9.80	22	2.118	2.60	58	1.874
9.60	23	2.100	2.40	59	1.847
9.40	24	2.087	2.20	60	1.822
9.20	25	2.090	2.00	61	1.815
9.00	26	2.087	1.80	62	1.838
8.80	27	2.081	1.60	63	1.857
8.60	28	2.079	1.40	64	1.826
8.40	29	2.097	1.20	65	1.835
8.20	30	2.132	1.00	66	1.905
8.00	31	2.101	0.80	67	2.119
7.80	32	2.075	0.60	68	2.442
7.60	33	2.066	0.40	69	2.662
7.40	34	2.065	0.20	70	3.184
7.20	35	2.067	0.00	71	5.344
7.00	36	2.074			