

**MANUAL HARD COPY DISTRIBUTION
DOCUMENT TRANSMITTAL 2003-35704**

USER INFORMATION:

Name: GERLACH*ROSE M EMPL#: 28401 CA#: 0363

Address: NUCSA2

Phone#: 254-3194

TRANSMITTAL INFORMATION:

TO: GERLACH*ROSE M 08/04/2003

LOCATION: USNRC

FROM: NUCLEAR RECORDS DOCUMENT CONTROL CENTER (NUCSA-2)

THE FOLLOWING CHANGES HAVE OCCURRED TO THE HARDCOPY OR ELECTRONIC MANUAL ASSIGNED TO YOU:

TRM1 - TECHNICAL REQUIREMENTS MANUAL UNIT 1

REMOVE MANUAL TABLE OF CONTENTS DATE: 05/28/2003

ADD MANUAL TABLE OF CONTENTS DATE: 08/01/2003

CATEGORY: DOCUMENTS TYPE: TRM

ID: TRM1

REPLACE: REV:N/A

UPDATES FOR HARD COPY MANUALS WILL BE DISTRIBUTED WITHIN 5 DAYS IN ACCORDANCE WITH DEPARTMENT PROCEDURES. PLEASE MAKE ALL CHANGES AND ACKNOWLEDGE COMPLETE IN YOUR NIMS INBOX UPON RECEIPT OF HARD COPY. FOR ELECTRONIC MANUAL USERS, ELECTRONICALLY REVIEW THE APPROPRIATE DOCUMENTS AND ACKNOWLEDGE COMPLETE IN YOUR NIMS INBOX.

A001

TRM

**APPROVED AMENDMENT TO
UNIT 1 TECHNICAL REQUIREMENTS MANUAL**

EFFECTIVE DATE: 07/28/2003

Replace the following pages of the Technical Requirements Manual with the enclosed pages. The revised pages are identified by Effective Date and contain vertical lines indicating the area of change.

REMOVE PAGES	INSERT PAGES	EFFECTIVE DATE
TRM / LOES-1 through TRM / LOES-6	TRM / LOES-1 through TRM / LOES-6	07/28/2003
TRM / 3.2-2 through TRM 3.2-35	TRM / 3.2-2 through TRM 3.2-35	07/28/2003

SUSQUEHANNA STEAM ELECTRIC STATION
LIST OF EFFECTIVE SECTIONS (TECHNICAL REQUIREMENTS MANUAL)

<u>Section</u>	<u>Title</u>	<u>Effective Date</u>
TOC	TABLE OF CONTENTS	05/16/2003
1.0	USE AND APPLICATION Pages TRM / 1.0-1 through TRM / 1.0-3	10/04/2002
2.0	PLANT PROGRAMS Pages 2.0-1 through 2.0-2 Page TRM / 2.0-3 Page TRM / 2.0-4 Pages TRM / 2.0-5 through Page TRM / 2.0-7 Page TRM / 2.0-8 Page TRM / 2.0-9 Pages TRM / 2.0-10 through TRM / 2.0-12 Page TRM / 2.0-13	08/31/1998 08/01/2001 06/25/2002 04/02/1999 03/29/2000 09/04/2002 04/02/1999 06/16/2000
3.0	APPLICABILITY Pages TRM / 3.0-1 and TRM / 3.0-2 Pages TRM / 3.0-3 Page TRM / 3.0-4	04/08/1999 03/15/2002 04/08/1999
3.1	REACTIVITY CONTROL SYSTEMS Pages 3.1-1 through 3.1-6 Pages TRM / 3.1-7 and TRM / 3.1-8 Pages TRM / 3.1-9 and TRM / 3.1-9a Page TRM / 3.1-10	08/31/1998 06/05/2002 02/18/1999 02/18/1999
3.2	CORE OPERATING LIMITS REPORT Page TRM / 3.2-1 Pages TRM / 3.2-2 through TRM / 3.2-35	07/07/1999 07/28/2003
3.3	INSTRUMENTATION Pages TRM / 3.3-1 through TRM / 3.3-3 Page TRM / 3.3-4 Pages 3.3-5 through 3.3-8 Pages TRM / 3.3-9 and TRM / 3.3-9a Pages TRM / 3.3-10 and TRM / 3.3-11 Page TRM / 3.3-12 Pages TRM / 3.3-13 through TRM / 3.3-15 Page TRM / 3.3-16 Pages TRM / 3.3-17 and TRM / 3.3-18 Pages TRM / 3.3-19 through TRM / 3.3-21 Page 3.3-22 Pages TRM / 3.3-23 through TRM / 3.3-25 Page TRM / 3.3-26	07/16/1999 11/28/2000 08/31/1998 12/17/1998 12/17/1998 03/30/2001 12/14/1998 06/27/2001 06/14/2002 12/14/1998 08/31/1998 05/16/2003 04/02/1999

SUSQUEHANNA STEAM ELECTRIC STATION
LIST OF EFFECTIVE SECTIONS (TECHNICAL REQUIREMENTS MANUAL)

<u>Section</u>	<u>Title</u>	<u>Effective Date</u>
3.4	REACTOR COOLANT SYSTEM Pages 3.4-1 through 3.4-5 Pages 3.4-6 through 3.4-13	10/23/1998 08/31/1998
3.5	EMERGENCY CORE COOLING AND RCIC Pages 3.5-1 through 3.5-3 Page TRM / 3.5-4 Pages 3.5-5 through 3.5-7	08/31/1998 04/17/2000 08/31/1998
3.6	CONTAINMENT Pages 3.6-1 through 3.6-3 Page TRM / 3.6-4 Page 3.6-5 Pages TRM / 3.6-6 through TRM / 3.6-8	08/31/1998 01/07/2002 08/31/1998 12/31/2002
3.7	PLANT SYSTEMS Pages 3.7-1 through 3.7-3 Pages TRM / 3.7-4 through TRM / 3.7-10 Page TRM / 3.7-11 Pages TRM / 3.7-12 through TRM / 3.7-27 Pages TRM / 3.7-28 through TRM / 3.7-34 Page TRM / 3.7-34a Pages TRM / 3.7-35 through TRM / 3.7-37 Pages 3.7-38 through 3.7-40 Pages TRM / 3.7-41 and TRM / 3.7-41a Pages 3.7-42 and 3.7-43 Pages 3.7-44 through 3.7-48 Page TRM / 3.7-49 Pages TRM / 3.7-50 and TRM / 3.7-51 Pages TRM / 3.7-52 and TRM / 3.7-53 Page TRM / 3.7-54	08/31/1998 08/02/1999 12/29/1999 08/02/1999 11/16/2001 10/05/2002 02/01/1999 08/31/1998 08/11/2000 08/31/1998 10/13/1998 03/08/2003 03/09/2001 04/15/2003 07/29/1999
3.8	ELECTRICAL POWER Pages TRM / 3.8-1 and TRM / 3.8-2 Page 3.8-3 Page TRM / 3.8-4 Pages TRM / 3.8-5 and TRM / 3.8-6 Pages TRM / 3.8-7 through TRM / 3.8-9 Page TRM / 3.8-10 Page TRM / 3.8-11 Page TRM / 3.8-11a Pages 3.8-12 through 3.8-14 Pages TRM / 3.8-15 through TRM / 3.8-17 Page 3.8-18 Page TRM / 3.8-19	04/02/2002 08/31/1998 12/31/2002 04/02/2002 08/31/1998 07/19/2001 04/02/2002 04/02/2002 08/31/1998 04/02/2002 08/31/1998 04/02/2002

SUSQUEHANNA STEAM ELECTRIC STATION
LIST OF EFFECTIVE SECTIONS (TECHNICAL REQUIREMENTS MANUAL)

<u>Section</u>	<u>Title</u>	<u>Effective Date</u>
	Page 3.8-20	08/31/1998
	Pages TRM / 3.8-21 through TRM / 3.8-23	06/06/1999
	Pages 3.8-24 and 3.8-25	08/31/1998
3.9	REFUELING OPERATIONS	
	Pages 3.9-1 through 3.9-3	08/31/1998
3.10	MISCELLANEOUS	
	Pages 3.10-1 through 3.10-4	08/31/1998
	Page TRM / 3.10-5	03/08/2003
	Page TRM / 3.10-6	06/05/2002
	Page TRM / 3.10-7	04/07/2000
		Corrected
	Page TRM / 3.10-8	04/17/2002
3.11	RADIOACTIVE EFFLUENTS	
	Pages 3.11-1 through 3.11-12	08/31/1998
	Pages 3.11-13 through 3.11-16	09/01/1998
	Pages 3.11-17 through 3.11-21	08/31/1998
	Pages TRM / 3.11-22 through TRM / 3.11-24	04/02/2002
	Pages 3.11-25 through 3.11-32	09/01/1998
	Pages 3.11-33 through 3.11-47	08/31/1998
3.12	LOADS CONTROL PROGRAM	
	Pages TRM / 3.12-1 through TRM / 3.12-5	02/05/1999
4.0	ADMINISTRATIVE CONTROLS	
	Pages 4.0-1 through 4.0-8	08/31/1998

SUSQUEHANNA STEAM ELECTRIC STATION
LIST OF EFFECTIVE SECTIONS (TECHNICAL REQUIREMENTS MANUAL)

<u>Section</u>	<u>Title</u>	<u>Effective Date</u>
B 3.0	APPLICABILITY BASES	
	Pages B 3.0-1 through B 3.0-10	08/31/1998
	Pages TRM / B 3.0-11 through TRM / B 3.0-15	03/15/2002
B 3.1	REACTIVITY CONTROL SYSTEMS BASES	
	Pages TRM / B 3.1-1 through TRM / B 3.1-3	07/13/1999
	Page B 3.1-4	08/31/1998
	Pages TRM / B 3.1-5 through TRM / B 3.1-7	07/13/1999
	Page TRM / B 3.1-8	02/18/1999
B 3.2	CORE OPERATING LIMITS BASES	
	Page B 3.2-1	08/31/1998
B 3.3	INSTRUMENTATION BASES	
	Page TRM / B 3.3-1	04/07/2000
	Page B 3.3-2	08/31/1998
	Pages TRM / B 3.3-3 and TRM / B 3.3-3A	12/29/2000
	Pages TRM / B 3.3-4 through TRM / B 3.3-6	03/21/2003
	Pages TRM / B 3.3-7 through TRM / B 3.3-9	03/30/2001
	Pages B 3.3-10 through B 3.3-13	08/31/1998
	Page TRM / B 3.3-14	06/25/2002
	Page TRM / B 3.3-14a	06/14/2002
	Page TRM / B 3.3-14b	06/14/2002
	Page B 3.3-15	08/31/1998
	Pages TRM / B 3.3-16 and TRM / B 3.3-17	04/07/2000
	Pages TRM / B3.3-18 through TRM / B 3.3-21	05/16/2003
B 3.4	REACTOR COOLANT SYSTEM BASES	
	Pages B 3.4-1 through B 3.4-4	08/31/1998
	Page TRM / B 3.4-5	10/15/1999
	Page B 3.4-6	08/31/1998
B 3.5	ECCS AND RCIC BASES	
	Pages B 3.5-1 through B 3.5-5	08/31/1998
B 3.6	CONTAINMENT BASES	
	Page TRM / B 3.6-1	07/26/2001
	Page TRM / B 3.6-2	02/01/1999
	Page B 3.6-3	08/31/1998
	Page TRM / B 3.6-4	09/23/1999
	Page TRM / B 3.6-5	01/07/2002
	Pages TRM / B 3.6-6 through TRM / B 3.6-11	12/31/2002

SUSQUEHANNA STEAM ELECTRIC STATION
LIST OF EFFECTIVE SECTIONS (TECHNICAL REQUIREMENTS MANUAL)

<u>Section</u>	<u>Title</u>	<u>Effective Date</u>
B 3.7	PLANT SYSTEMS BASES	
	Pages B 3.7-1 and B 3.7-2	08/31/1998
	Pages TRM / B 3.7-3 through TRM / B 3.7-7	08/02/1999
	Page TRM / B 3.7-7a	08/02/1999
	Pages TRM / B 3.7-8 through TRM / B 3.7-10	08/02/1999
	Page TRM / B 3.7-10a	08/02/1999
	Pages TRM / B 3.7-11 and TRM / B 3.7-11a	08/02/1999
	Pages TRM / B 3.7-12 through TRM / B 3.7-14	08/02/1999
	Pages TRM / B 3.7-14a and TRM / B 3.7-14b	08/02/1999
	Pages TRM / B 3.7-15 and TRM / B 3.7-16	02/01/1999
	Pages B 3.7-17 through B 3.7-20	08/31/1998
	Page TRM/B 3.7-21 through TRM/B 3.7-21a	05/11/2001
	Pages TRM/B 3.7-22 and TRM/B 3.7-23	04/07/2000
	Pages B 3.7-24 through B 3.7-30	08/31/1998
	Pages TRM / B 3.7-31 and TRM / B 3.7-32	03/09/2001
	Page TRM / B 3.7-33	04/15/2003
	Pages TRM / B 3.7-34 and TRM / B 3.7-35	07/05/2000
B 3.8	ELECTRICAL POWER BASES	
	Pages TRM / B 3.8-1 and TRM / B 3.8-2	04/02/2002
	Page TRM / B 3.8-2a	04/02/2002
	Page TRM / B 3.8-3	04/02/2002
	Page TRM / B 3.8-3a	04/02/2002
	Page TRM / B 3.8-4	04/02/2002
	Page TRM / B 3.8-4a	04/02/2002
	Page TRM / B 3.8-5	08/31/1998
	Pages TRM / B 3.8-6 through TRM / B 3.8-17	04/02/2002
B.3.9	REFUELING OPERATIONS BASES	
	Pages B 3.9-1 through B 3.9-7	08/31/1998
B 3.10	MISCELLANEOUS BASES	
	Pages B 3.10-1 through B 3.10-2	08/31/1998
	Page TRM / B 3.10-3	03/08/2003
	Pages TRM / B 3.10-4 and TRM / B 3.10-5	08/23/1999
	Pages TRM / B 3.10-6 and TRM / B 3.10-7	04/17/2002
B 3.11	RADIOACTIVE EFFLUENTS BASES	
	Pages B 3.11-1 through B 3.11-9	08/30/1998
	Page TRM / B 3.11-10	02/01/1999
	Pages TRM/B 3.11-11 and TRM/B 3.11-11a	04/07/2000
	Pages TRM/B 3.11-12 and TRM/B 3.11-13	02/01/1999
	Page TRM / B 3.11-14	11/01/1999
	Page TRM / B 3.11-15	02/01/1999
	Pages B 3.11-16 through B 3.11-19	08/30/1998
	Page TRM / B 3.11-20	04/02/2002

SUSQUEHANNA STEAM ELECTRIC STATION
LIST OF EFFECTIVE SECTIONS (TECHNICAL REQUIREMENTS MANUAL)

<u>Section</u>	<u>Title</u>	<u>Effective Date</u>
	Page TRM / B 3.11-20a	04/02/2002
	Pages TRM / B 3.11-21 through TRM / B 3.11-23	04/02/2002
	Page TRM / B 3.11-23a	04/02/2002
	Page TRM / B 3.11-24	03/21/2003
	Page TRM / B 3.11-25	04/15/2003
	Pages B 3.11-26 through B 3.11-35	08/30/1998
	Page TRM / B 3.11-36	02/12/1999
B.3.12	LOADS CONTROL PROGRAM BASES	
	Pages TRM / B 3.12-1 through TRM / B 3.12-3	02/05/1999

g:\Lic Docs\TRM-Word\TRM Manual\0.00 Lists\Unit 1\U1 TRM LOES.doc

Susquehanna SES Unit 1 Cycle 13

CORE OPERATING LIMITS REPORT

**Nuclear Fuels
Engineering**

July 2003



**CORE OPERATING LIMITS REPORT
REVISION DESCRIPTION INDEX**

Rev. No.	Affected Sections	Description/Purpose of Revision
0	ALL	Issuance of this COLR is in support of Unit 1 Cycle 13 operation.
1	5.0 6.0 8.0	<p>This revision adds a text box to all appropriate plots. This text box indicates that for all bypass operable cases, four bypass valves are assumed operable. For the bypass inoperable cases, the text box indicates that two or more bypass valves are assumed inoperable.</p> <p>This revision was generated in response to Facility Operating License Amendment 210 which altered SR 3.7.6.1.</p> <p>This revision is administrative in nature and no underlying calculations or plotted data were altered.</p>

SUSQUEHANNA STEAM ELECTRIC STATION
Unit 1 Cycle 13
CORE OPERATING LIMITS REPORT

Table of Contents

1.0	<u>INTRODUCTION</u>	4
2.0	<u>DEFINITIONS</u>	5
3.0	<u>SHUTDOWN MARGIN</u>	6
4.0	<u>AVERAGE PLANAR LINEAR HEAT GENERATION RATE (APLHGR)</u>	7
5.0	<u>MINIMUM CRITICAL POWER RATIO (MCPR)</u>	9
6.0	<u>LINEAR HEAT GENERATION RATE (LHGR)</u>	20
7.0	<u>AVERAGE POWER RANGE MONITOR (APRM) GAIN AND SETPOINTS</u>	23
8.0	<u>RECIRCULATION LOOPS - SINGLE LOOP OPERATION</u>	26
9.0	<u>REFERENCES</u>	33

1.0 INTRODUCTION

This CORE OPERATING LIMITS REPORT for Susquehanna Unit 1 Cycle 13 is prepared in accordance with the requirements of Susquehanna Unit 1, Technical Specification 5.6.5. As required by Technical Specifications 5.6.5, core shutdown margin, the core operating limits and APRM setpoints presented herein were developed using NRC-approved methods and are established such that all applicable limits of the plant safety analysis are met.

2.0 DEFINITIONS

Terms used in this COLR but not defined in Section 1.0 of the Technical Specifications or Section 1.1 of the Technical Requirements Manual are provided below.

- 2.1 The AVERAGE BUNDLE EXPOSURE shall be equal to the total energy produced by the bundle divided by the total initial weight of uranium in the fuel bundle.
- 2.2 The AVERAGE PLANAR EXPOSURE at a specified height shall be equal to the total energy produced per unit length at the specified height divided by the total initial weight of uranium per unit length at that height.
- 2.3 The FRACTION OF LIMITING POWER DENSITY (FLPD) shall be the LHGR existing at a given height divided by the applicable LHGR for APRM Setpoint Limit for that bundle type.
- 2.4 The FRACTION OF RATED THERMAL POWER (FRTP) shall be the measured THERMAL POWER divided by the RATED THERMAL POWER.
- 2.5 FDLRX is the ratio of the maximum LHGR calculated by the core monitoring system for each fuel bundle divided by the LHGR limit for the applicable fuel bundle type.
- 2.6 MFLCPR is the ratio of the applicable MCPR operating limit for the applicable fuel bundle type divided by the MCPR calculated by the core monitoring system for each fuel bundle.
- 2.7 MAPRAT is the ratio of the maximum APLHGR calculated by the core monitoring system for each fuel bundle divided by the APLGHR limit for the applicable fuel bundle type.
- 2.8 FDLRC is the ratio of the maximum LHGR calculated by the core monitoring system for each fuel bundle divided by the LHGR for APRM Setpoint Limit for the applicable fuel bundle type.

3.0 SHUTDOWN MARGIN

3.1 Technical Specification Reference

Technical Specification 3.1.1

3.2 Description

The SHUTDOWN MARGIN shall be equal to or greater than:

a) 0.38% $\Delta k/k$ with the highest worth rod analytically determined

OR

b) 0.28% $\Delta k/k$ with the highest worth rod determined by test

Since core reactivity will vary during the cycle as a function of fuel depletion and poison burnup, Beginning of Cycle (BOC) SHUTDOWN MARGIN (SDM) tests must also account for changes in core reactivity during the cycle. Therefore, the SDM measured at BOC must be equal to or greater than the applicable requirement from either 3.2.a or 3.2.b plus an adder, "R". The adder, "R", is the difference between the calculated value of maximum core reactivity (that is, minimum SDM) during the operating cycle and the calculated BOC core reactivity. If the value of "R" is zero (that is, BOC is the most reactive point in the cycle) no correction to the BOC measured value is required.

The SHUTDOWN MARGIN limits provided in 3.2a and 3.2b are applicable in MODES 1, 2, 3, 4, and 5. This includes core shuffling.

4.0 AVERAGE PLANAR LINEAR HEAT GENERATION RATE (APLHGR)

4.1 Technical Specification Reference


Technical Specification 3.2.1

4.2 Description

The APLHGRs for ATRIUM™-10 fuel shall not exceed the limit shown in Figure 4.2-1.

The APLHGR limits in Figure 4.2-1 are valid for Main Turbine Bypass Operable and Inoperable and EOC-RPT Operable and Inoperable in Two Loop operation. The APLHGR limits for Single Loop operation are provided in Section 8.0.

SSS UNIT 1 CYCLE 13

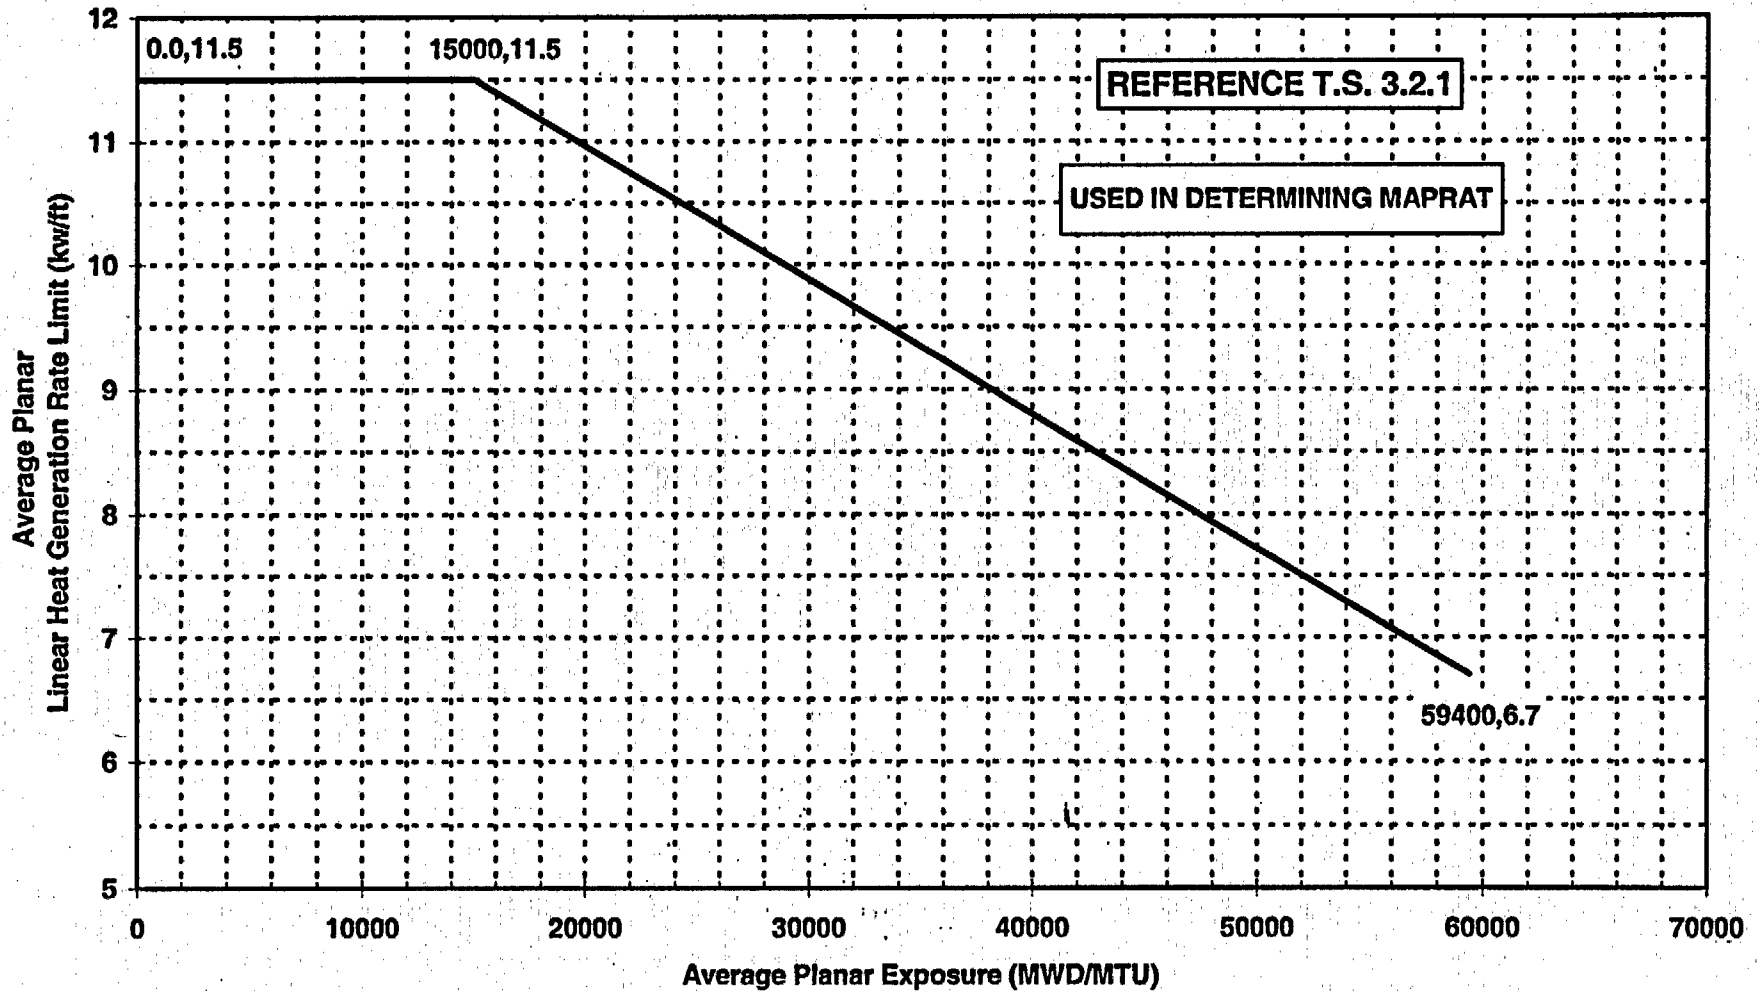

AVERAGE PLANAR LINEAR HEAT GENERATION RATE LIMIT VERSUS
AVERAGE PLANAR EXPOSURE TWO LOOP OPERATION
ATRIUM™-10 FUEL
FIGURE 4.2-1

5.0 MINIMUM CRITICAL POWER RATIO (MCPR)

5.1 Technical Specification Reference

Technical Specification 3.2.2, 3.7.6, and 3.3.4.1

5.2 Description

The MCPR limit is specified as a function of core power, core flow, average scram insertion time per Section 5.3 and plant equipment operability status. The MCPR limits for all fuel types (ATRIUMTM-10) shall be the greater of the Flow-Dependent or the Power-Dependent MCPR, depending on the applicable equipment operability status.

a) EOC-RPT and Main Turbine Bypass Operable

Figure 5.2-1: Flow-Dependent MCPR value determined from BOC to EOC

Figure 5.2-2: Power-Dependent MCPR value determined from BOC to EOC

b) Main Turbine Bypass Inoperable / EOC-RPT Operable

Figure 5.2-3: Flow-Dependent MCPR value determined from BOC to EOC

Figure 5.2-4: Power-Dependent MCPR value determined from BOC to EOC

c) EOC-RPT Inoperable / Main Turbine Bypass Operable

Figure 5.2-5: Flow-Dependent MCPR value determined from BOC to EOC

Figure 5.2-6: Power-Dependent MCPR value determined from BOC to EOC

The MCPR limits in Figures 5.2-1 through 5.2-6 are valid for Two Loop operation.


The MCPR limits for Single Loop operation are provided in Section 8.0.

5.3 Average Scram Time Fraction

Table 5.3-1 provides the relationship between average scram time to control rod position and scram time fraction. The evaluation of scram insertion time data, as it relates to the attached table should be performed per Reactor Engineering procedures.


EOC-RPT and Main Turbine Bypass Operable

SSES UNIT 1 CYCLE 13

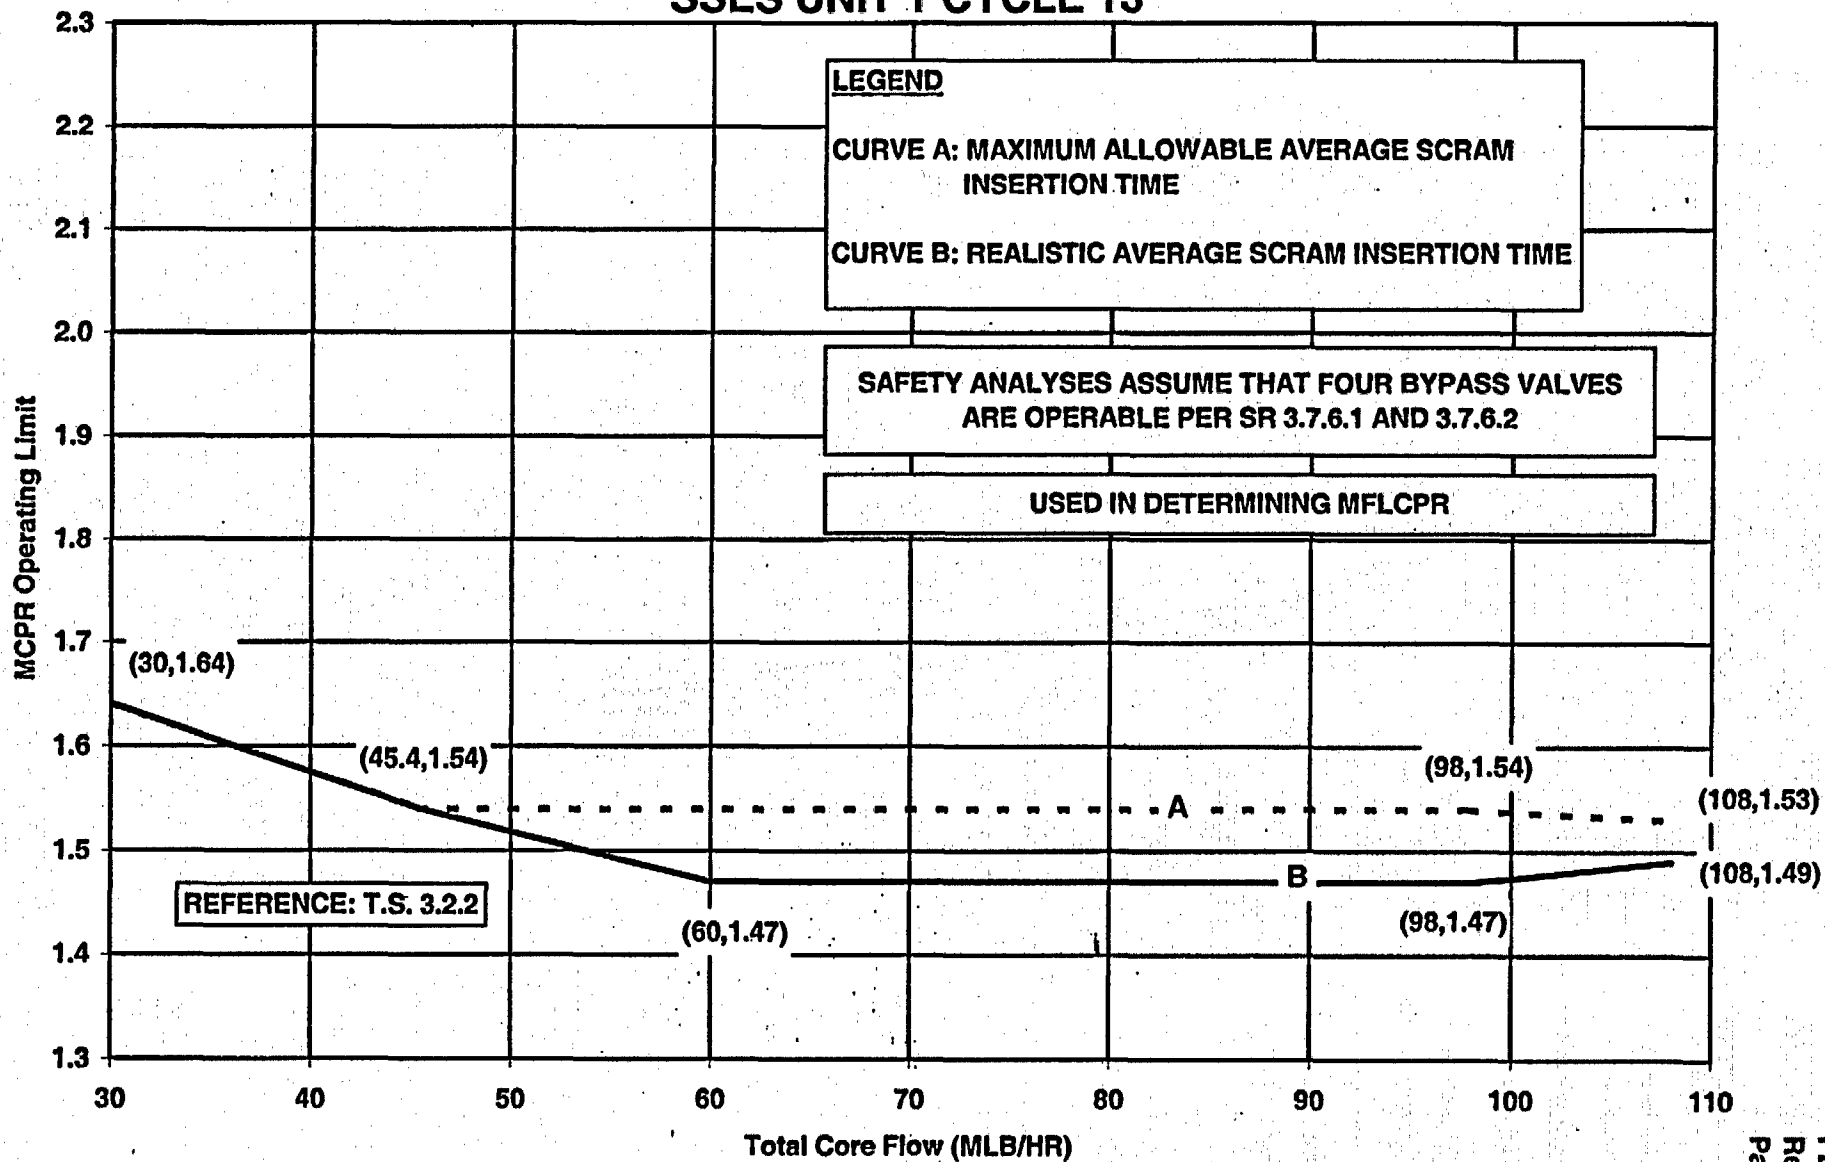


MCPR OPERATING LIMIT VERSUS TOTAL CORE FLOW
EOC-RPT AND MAIN TURBINE BYPASS OPERABLE
TWO LOOP OPERATION (BOC TO EOC)
FIGURE 5.2-1

SSS UNIT 1 CYCLE 13

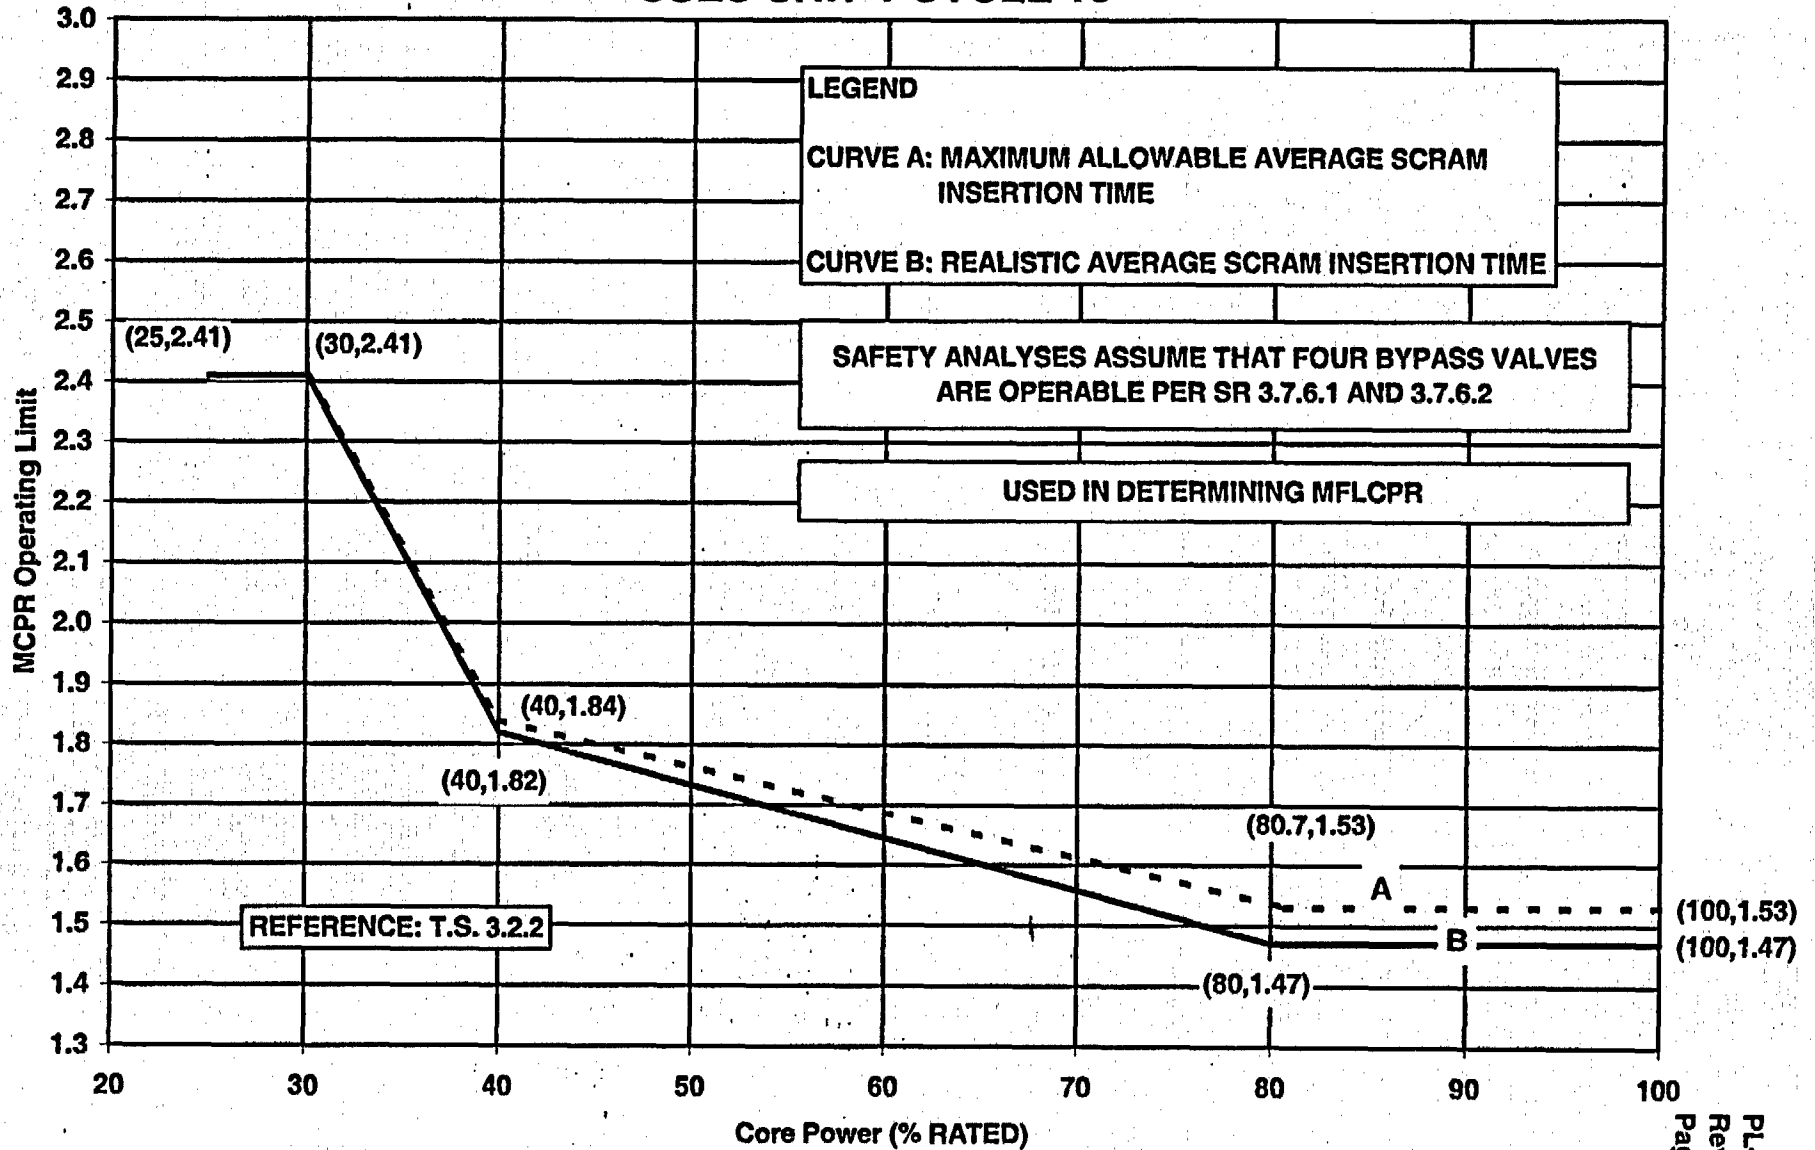


MCPR OPERATING LIMIT VERSUS CORE POWER
EOC-RPT AND MAIN TURBINE BYPASS OPERABLE
TWO LOOP OPERATION (BOC TO EOC)
FIGURE 5.2-2

Main Turbine Bypass Inoperable / EOC-RPT Operable

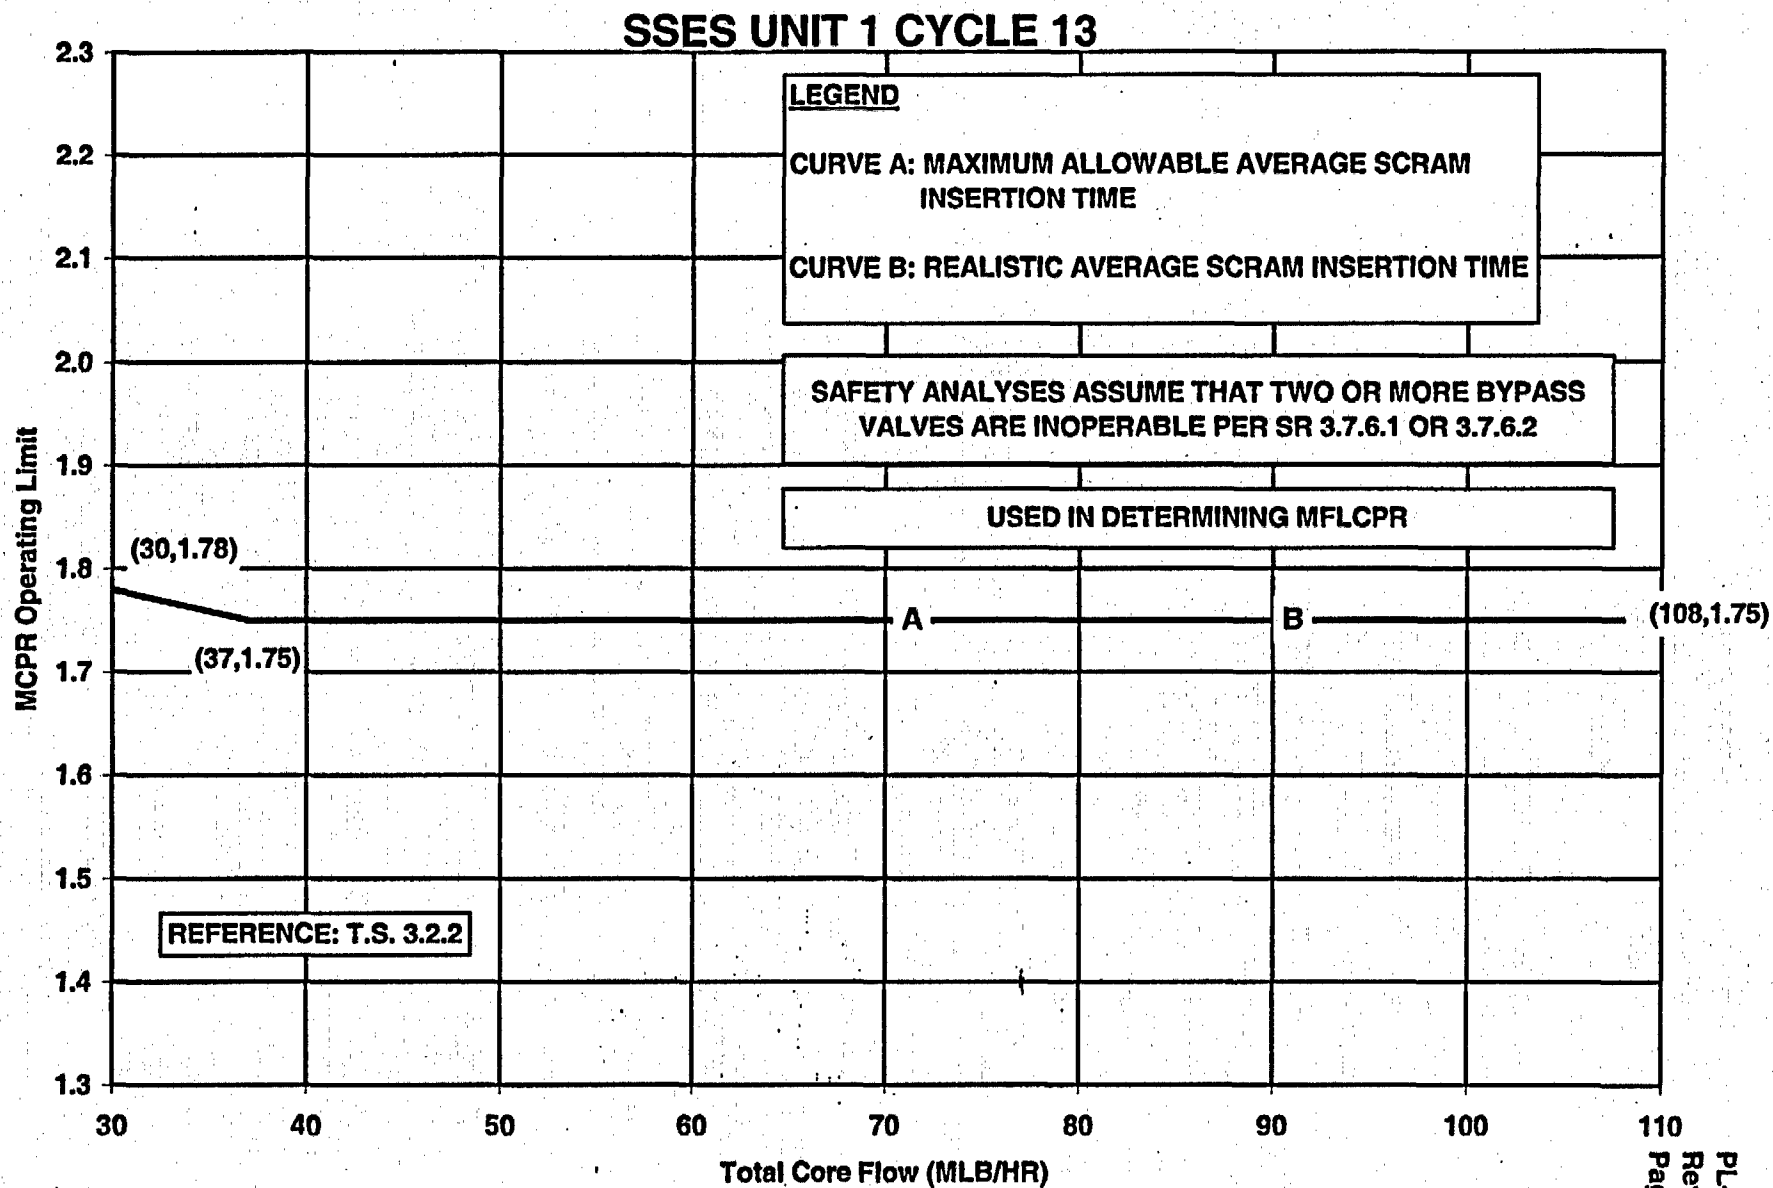

**MCPR OPERATING LIMIT VERSUS TOTAL CORE FLOW
MAIN TURBINE BYPASS INOPERABLE / EOC-RPT OPERABLE
TWO LOOP OPERATION (BOC TO EOC)
FIGURE 5.2-3**

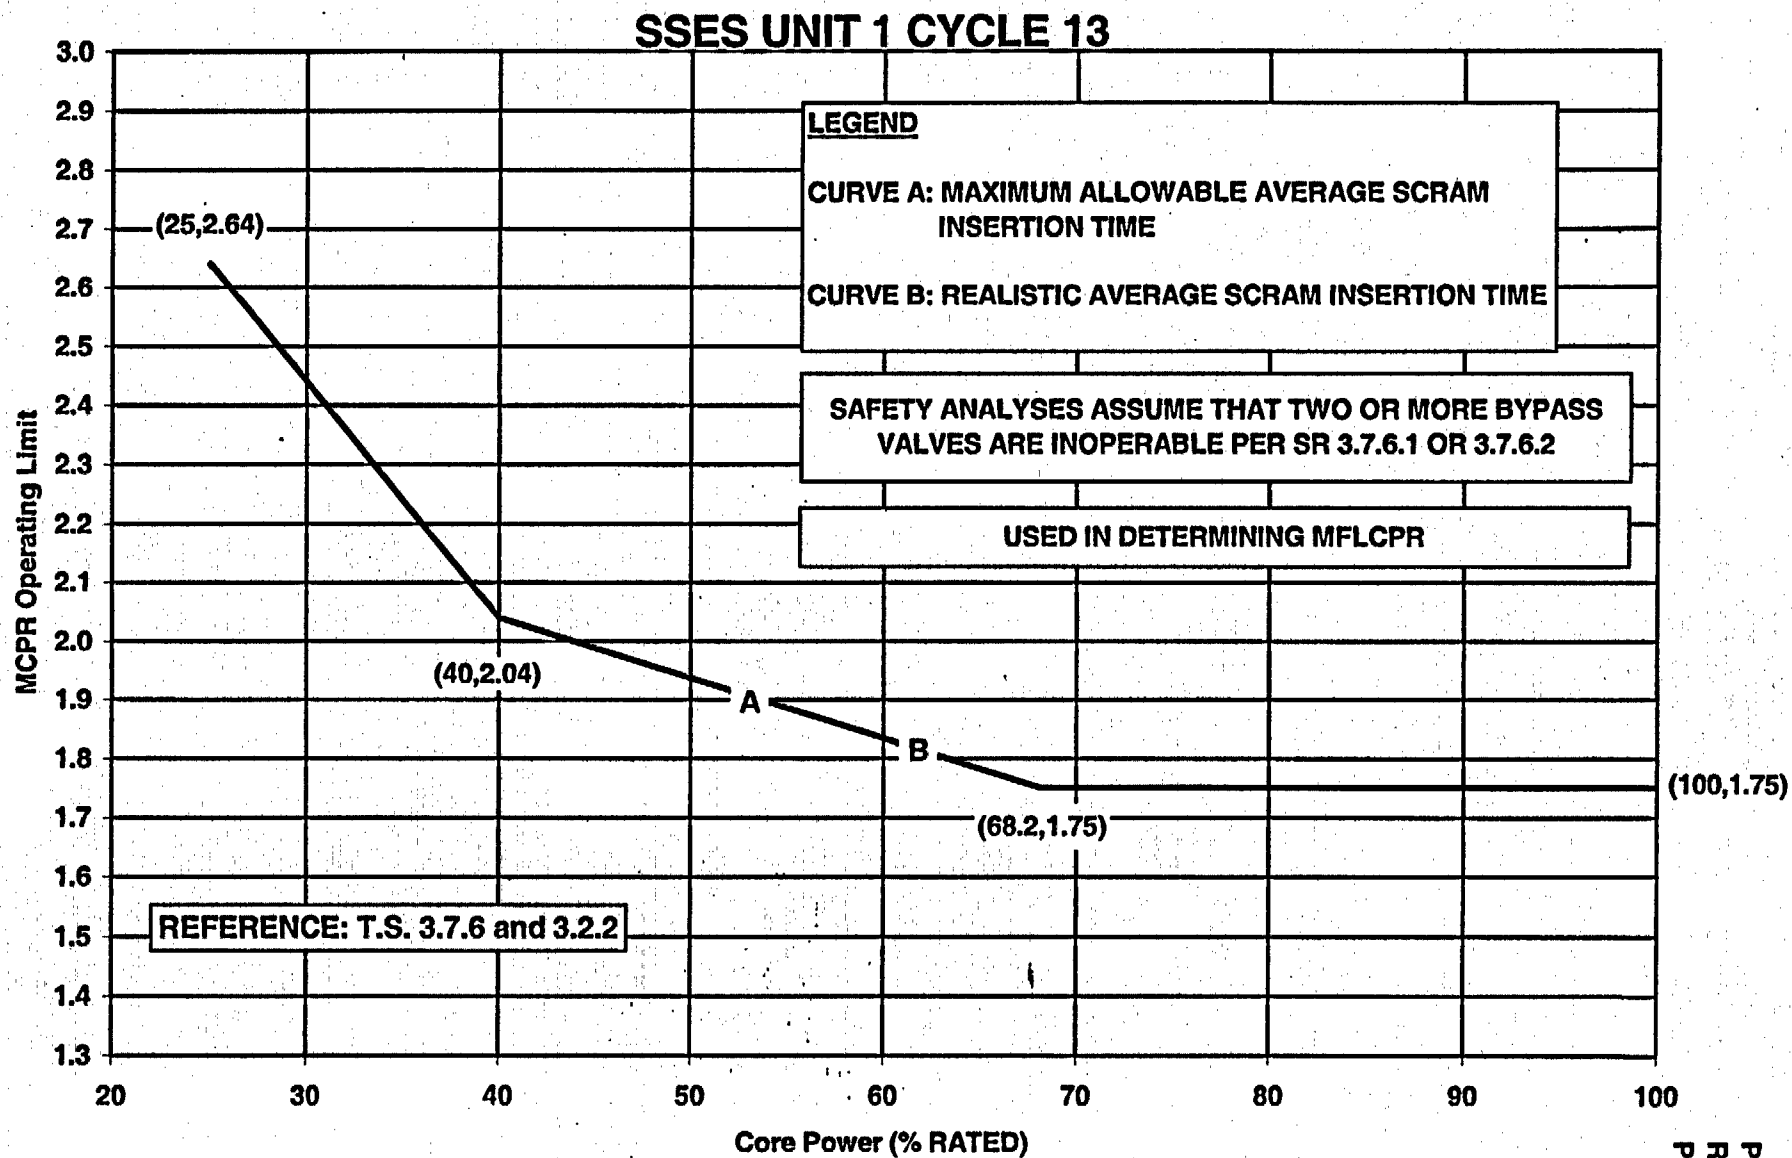

MCPR OPERATING LIMIT VERSUS CORE POWER
MAIN TURBINE BYPASS INOPERABLE / EOC-RPT OPERABLE
TWO LOOP OPERATION (BOC to EOC)
FIGURE 5.2-4


EOC-RPT Inoperable / Main Turbine Bypass Operable

SSES UNIT 1 CYCLE 13

SUSQUEHANNA UNIT 1


TRM 3.2-18

EFFECTIVE DATE 07/28/2003

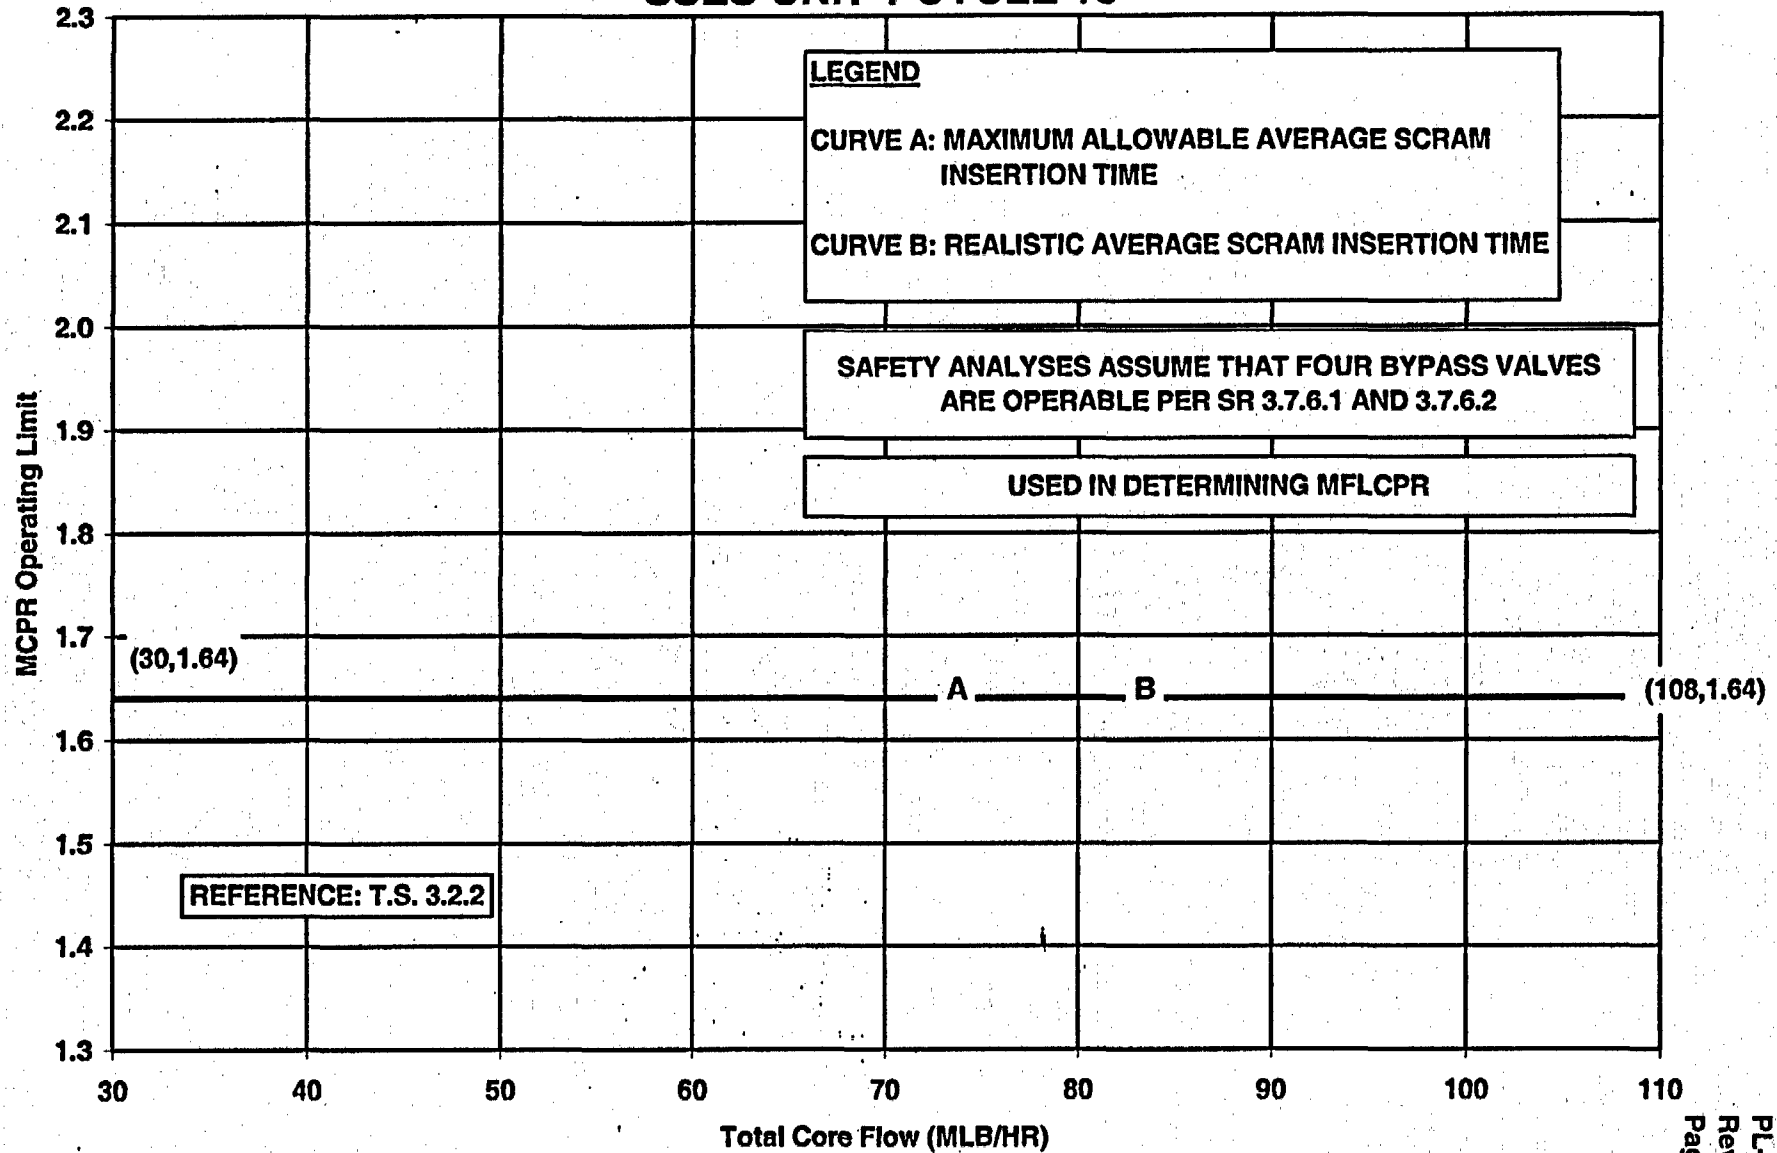

**MCPR OPERATING LIMIT VERSUS TOTAL CORE FLOW
EOC-RPT INOPERABLE / MAIN TURBINE BYPASS OPERABLE
TWO LOOP OPERATION (BOC TO EOC)
FIGURE 5.2-5**

SSES UNIT 1 CYCLE 13

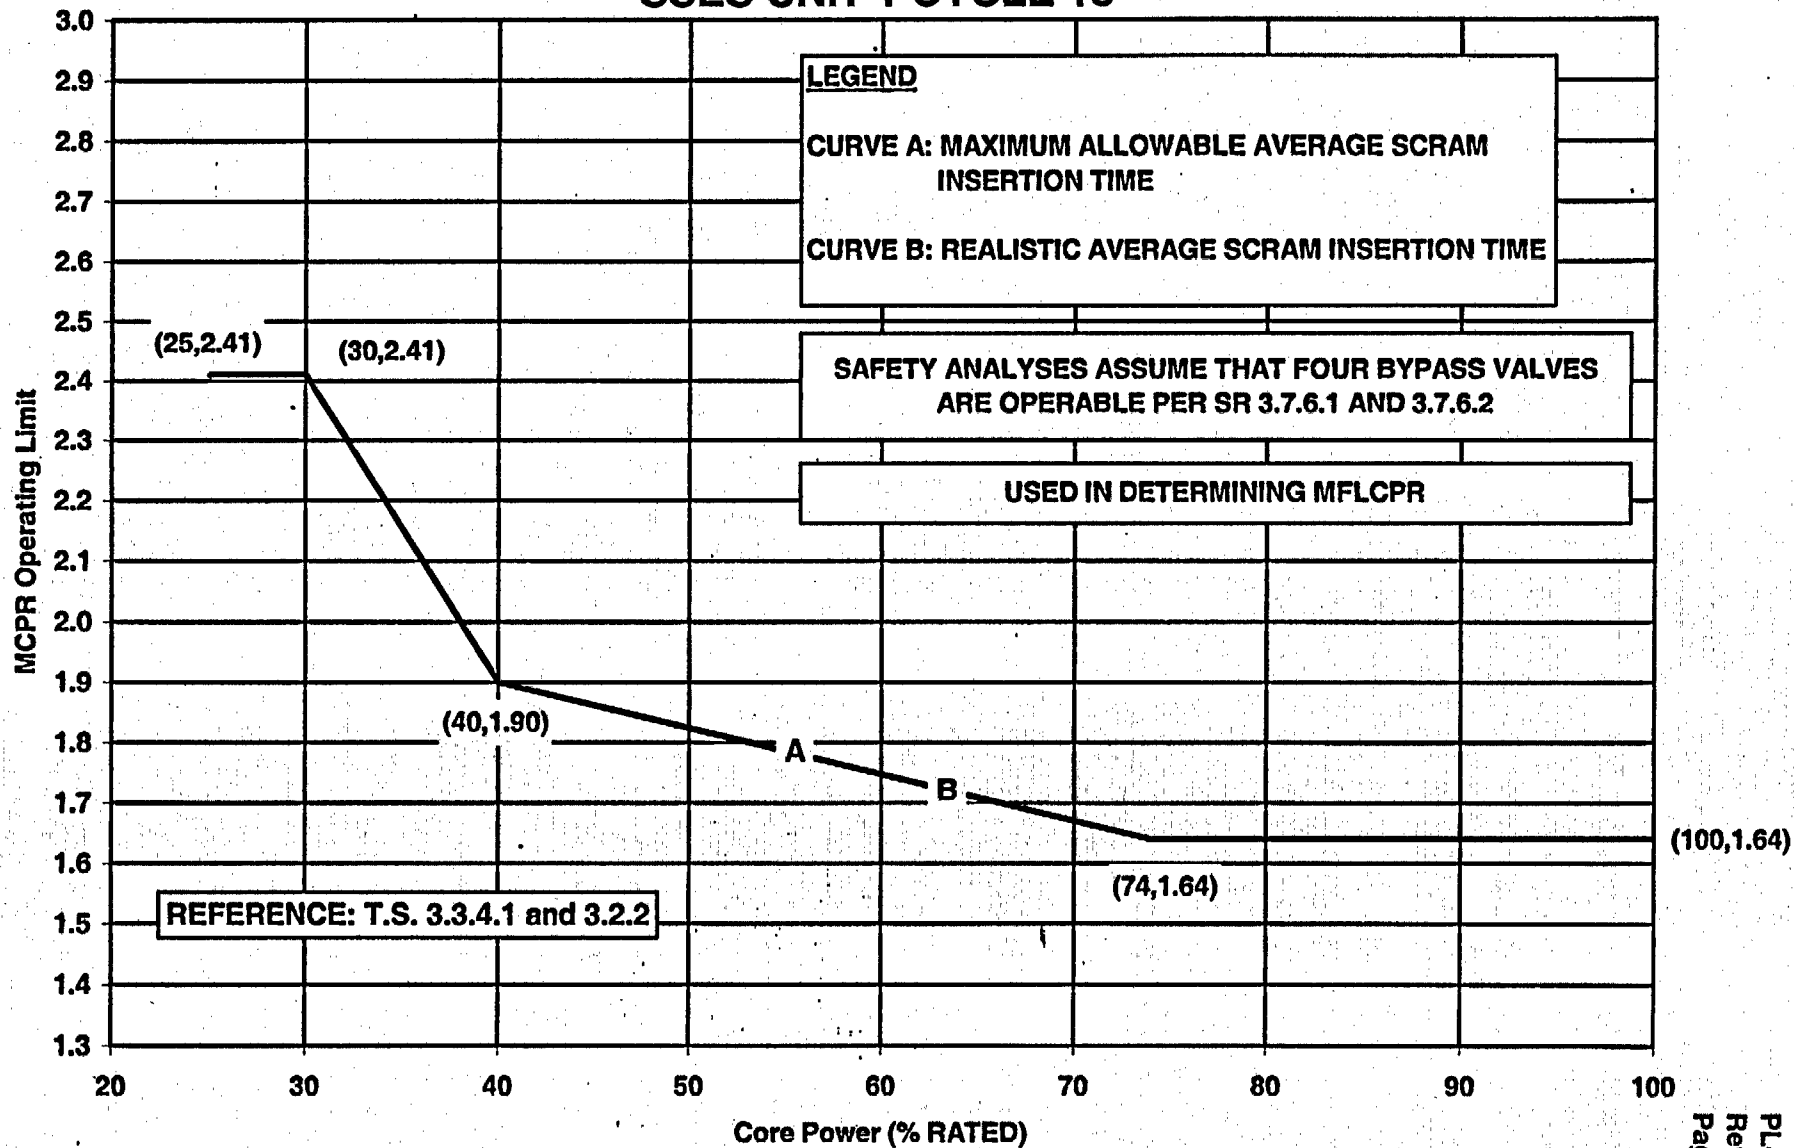

MCPR OPERATING LIMIT VERSUS CORE POWER
EOC-RPT INOPERABLE / MAIN TURBINE BYPASS OPERABLE
TWO LOOP OPERATION (BOC to EOC)
FIGURE 5.2-6

Table 5.3-1

**Average Scram Time Fraction Table For Use With Scram Time Dependent
MCPR Operating Limits**

Control Rod Position	Average Scram Time to Position (seconds)					
45	0.470	0.480	0.490	0.500	0.510	0.520
39	0.630	0.676	0.722	0.768	0.814	0.860
25	1.500	1.582	1.664	1.746	1.828	1.910
5	2.700	2.848	2.996	3.144	3.292	3.440
Scram Time Fraction	0.000	0.200	0.400	0.600	0.800	1.000
Average Scram Insertion Time	Realistic					Maximum Allowable

6.0 LINEAR HEAT GENERATION RATE (LHGR)

6.1 Technical Specification Reference

Technical Specification 3.2.3 and 3.7.6

6.2 Description

The LHGR limits are specified below as a function of Main Turbine Bypass operability for each fuel type as follows:


Main Turbine Bypass Operable

The LHGR for ATRIUMTM-10 fuel shall not exceed the LHGR limit determined from Figure 6.2-1.

Main Turbine Bypass Inoperable


The LHGR for ATRIUMTM-10 fuel shall not exceed the LHGR limit determined from Figure 6.2-2.

The LHGR limits in Figures 6.2-1 and 6.2-2 are valid for Two Loop and Single Loop operation.

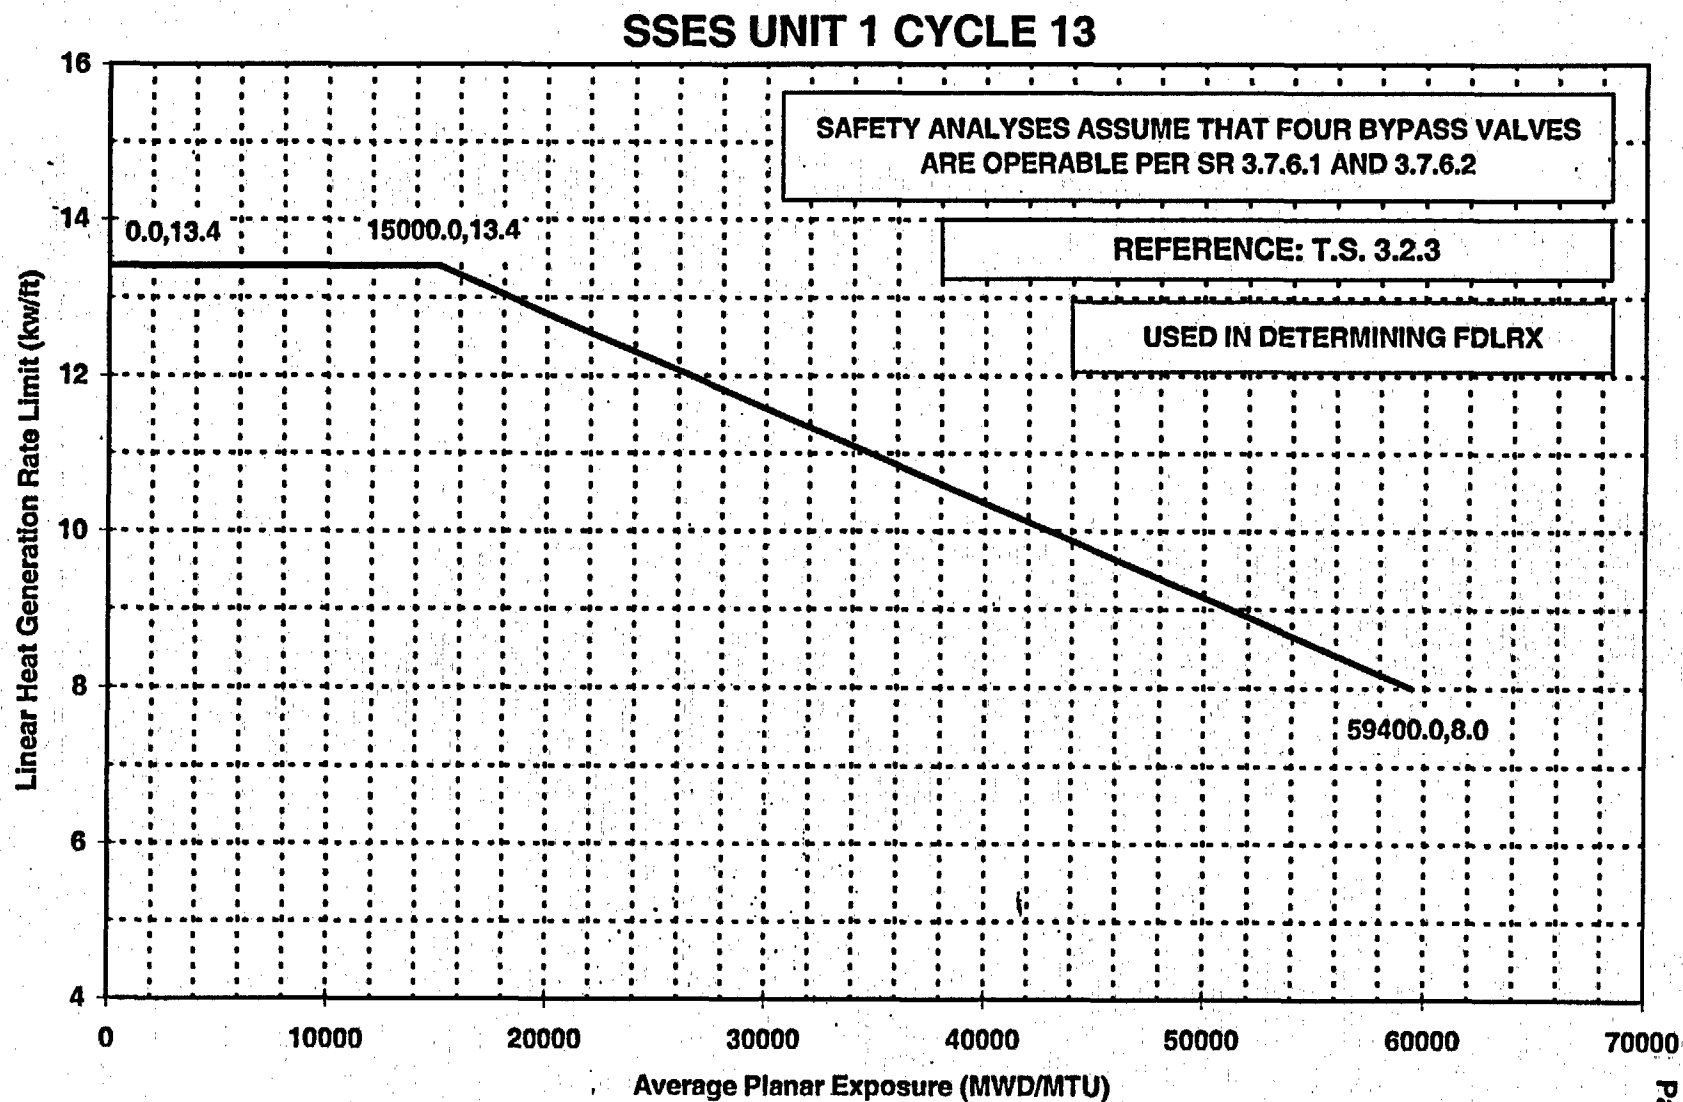

**LINEAR HEAT GENERATION RATE LIMIT VERSUS AVERAGE PLANAR EXPOSURE
MAIN TURBINE BYPASS OPERABLE
ATRIUM™-10 FUEL
FIGURE 6.2-1**

SSES UNIT 1 CYCLE 13

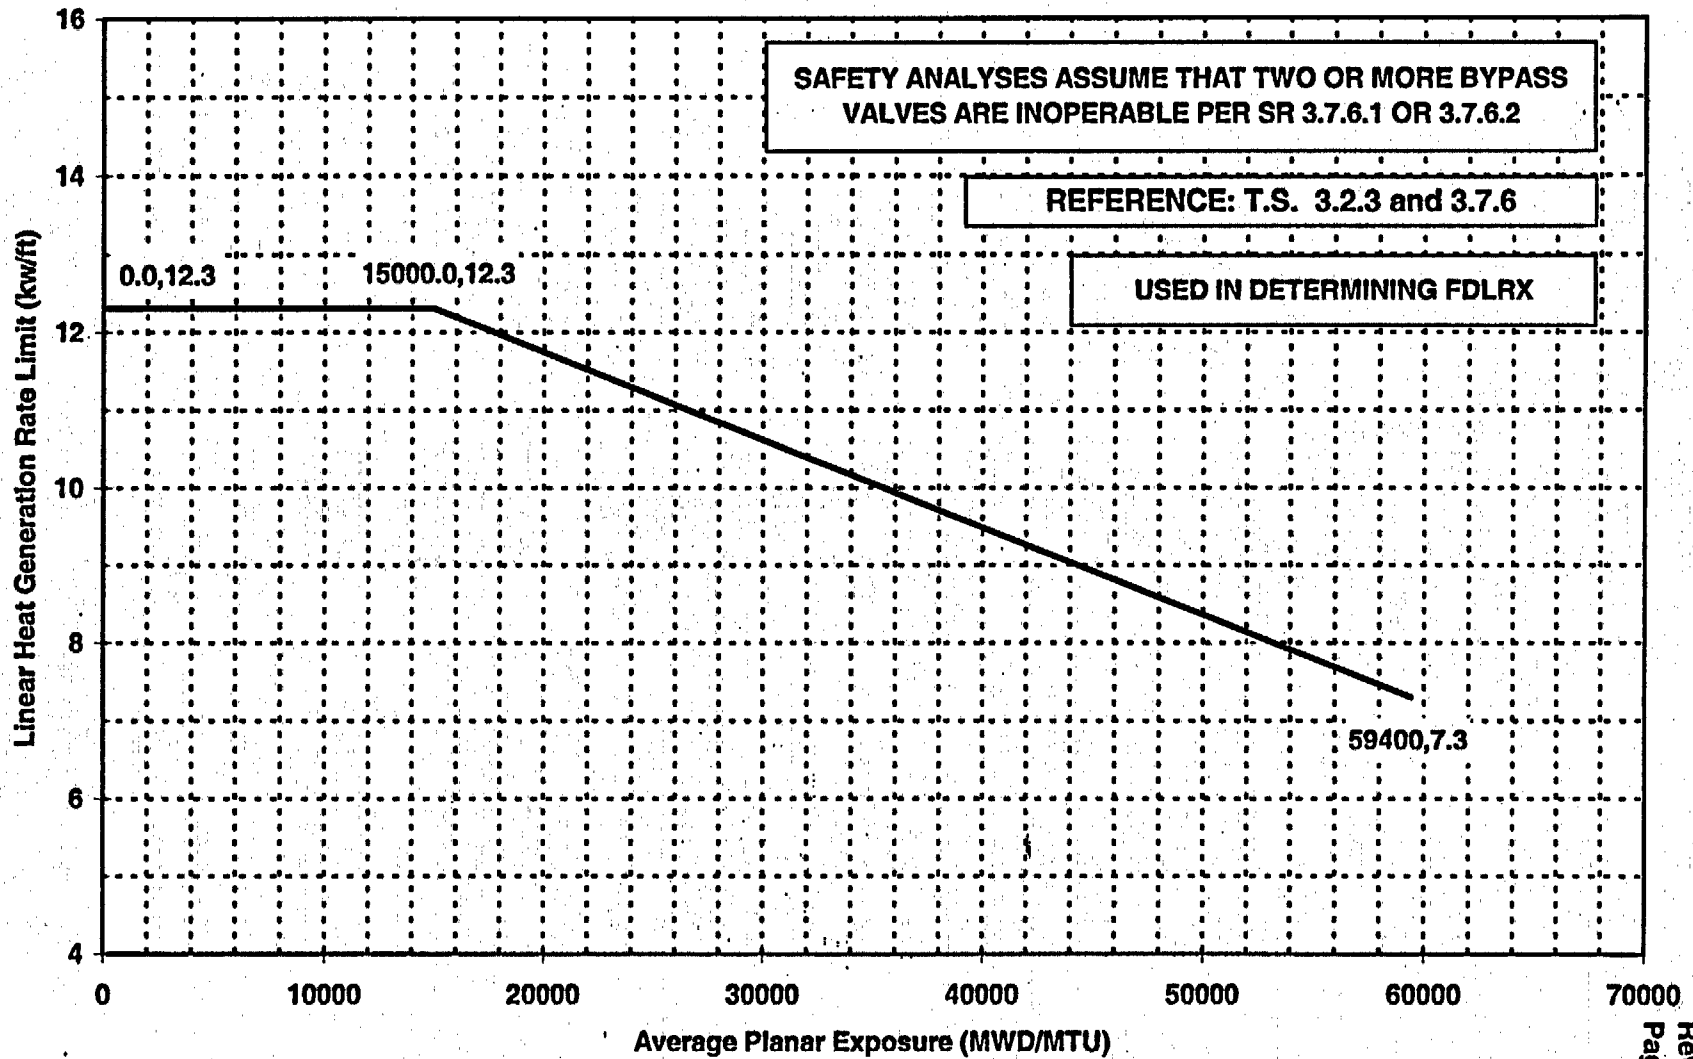

**LINEAR HEAT GENERATION RATE LIMIT VERSUS AVERAGE PLANAR EXPOSURE
MAIN TURBINE BYPASS INOPERABLE
ATRIUM™-10 FUEL
FIGURE 6.2-2**

7.0 AVERAGE POWER RANGE MONITOR (APRM) GAIN AND SETPOINTS

7.1 Technical Specification Reference

Technical Specification 3.2.4 and 3.3.1.1

7.2 Description

The APRM flow biased simulated thermal power-upscale scram trip setpoint (S) and flow biased neutron flux-upscale control rod block trip setpoint (S_{RB}) shall be established as specified in Table 7.2-1 and Table 7.2-2, including any adjustments per Technical Specification LCO 3.2.4.

Technical Specification LCO 3.2.4 provides an option to adjust the APRM setpoints when MFLPD is greater than FRACTION OF RATED THERMAL POWER (F RTP). The adjustment applies to both the APRM flow biased simulated thermal power-upscale scram trip setpoint and flow biased neutron flux-upscale control rod block trip setpoint for Two Loop and Single Loop operation. The APRM setpoints for Specification 3.2.4 are established in Tables 7.2-1 and 7.2-2.

Table 7.2-1
APRM Setpoint for
Two Loop Operation

Trip Setpoint	Allowable Value
$S \leq (0.58W + 59\%) T$	$S \leq (0.58W + 62\%) T^1$
$S_{RB} \leq (0.58W + 50\%) T$	$S_{RB} \leq (0.58W + 53\%) T$

Table 7.2-2
APRM Setpoint for
Single Loop Operation

Trip Setpoint	Allowable Value
$S \leq (0.58W + 54\%) T$	$S \leq (0.58W + 57\%) T^1$
$S_{RB} \leq (0.58W + 45\%) T$	$S_{RB} \leq (0.58W + 48\%) T$

where: S and S_{RB} are in percent of RATED THERMAL POWER

W = Loop recirculation flow as a percentage of the loop recirculation flow which produces a core flow of 100 million lbs/hr

T = Lowest value of the ratio of FRTP divided by the MFLPD.² The FLPD is the actual LHGR divided by the applicable LHGR limit for APRM Setpoints. The LHGR limit for APRM setpoints for ATRIUMTM-10 fuel shall be taken from Figure 7.2-1.


The LHGR for APRM setpoint limits in Figure 7.2-1 are valid for Main Turbine Bypass Operable and Inoperable and EOC-RPT Operable and Inoperable for both Two and Single Loop operation.

For calculated T-values greater than 1.0, a ratio of 1.0 is used in the above equations.

¹ APRM flow biased simulated thermal power-upscale scram allowable value in this table is equal to the value established in Technical Specification 3.3.1.1.

² For the calculation of T, the value of MFLPD shall be the maximum value of FDLRC.

SSS UNIT 1 CYCLE 13

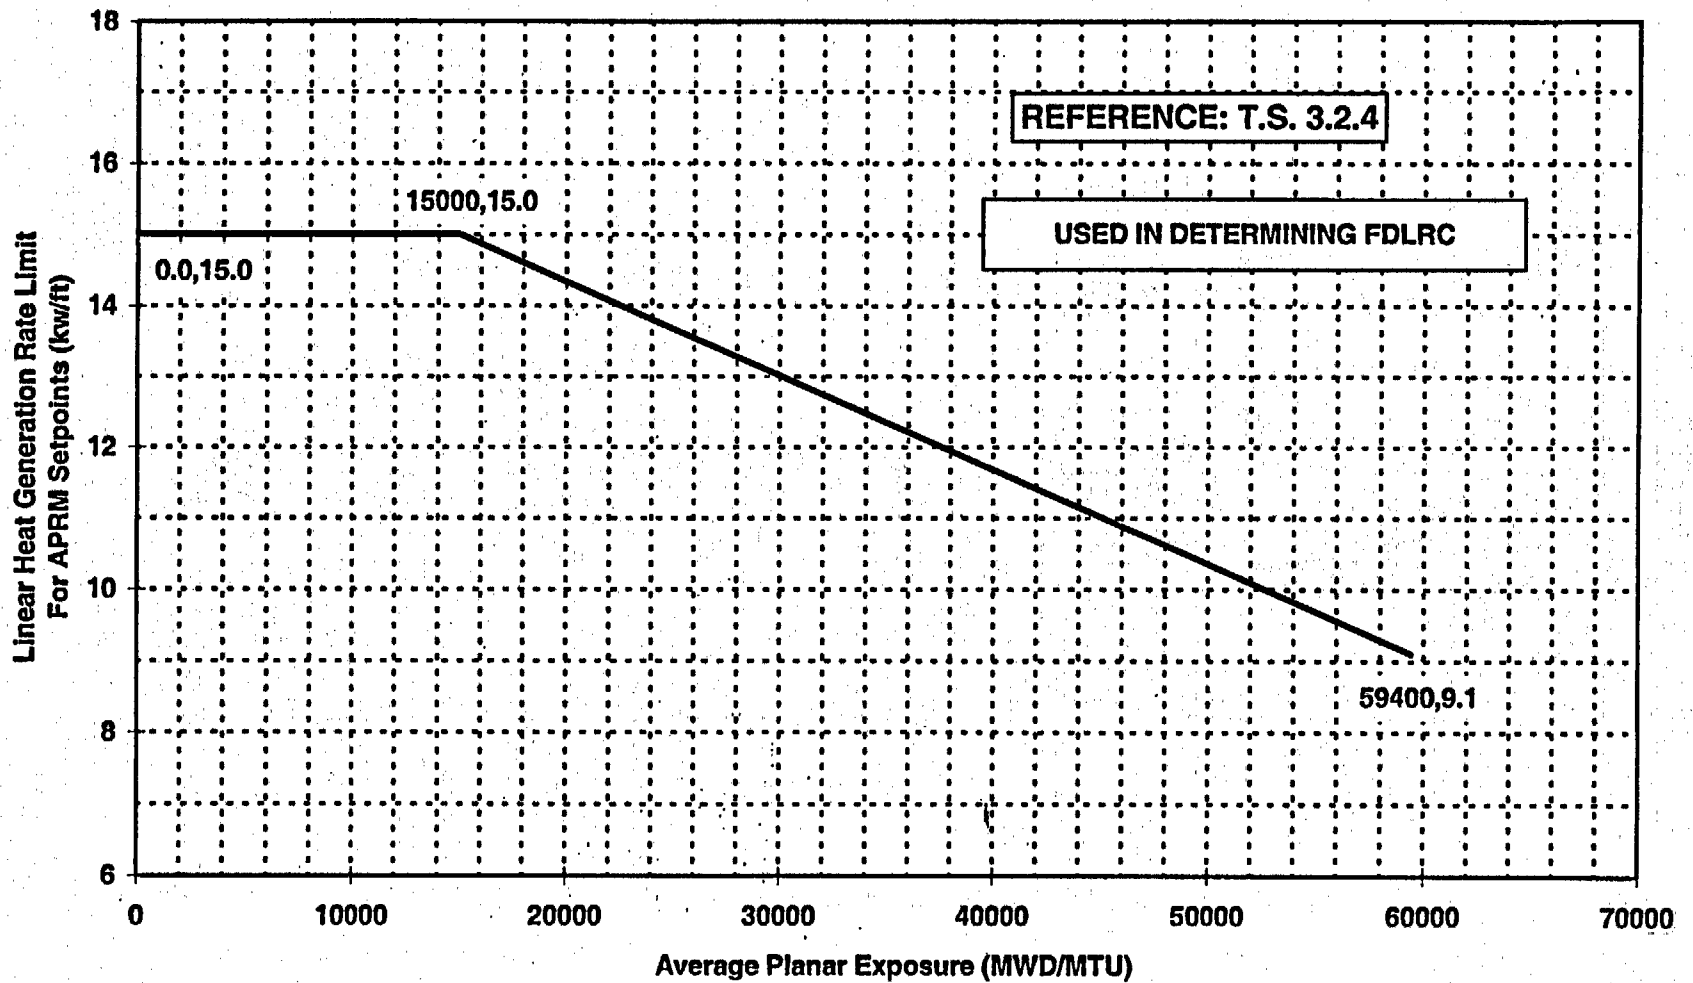

LINEAR HEAT GENERATION RATE LIMIT FOR APRM SETPOINTS VERSUS AVERAGE PLANAR EXPOSURE
 ATRIUM™ -10 FUEL
 FIGURE 7.2-1

8.0 RECIRCULATION LOOPS - SINGLE LOOP OPERATION

8.1 Technical Specification Reference

Technical Specification 3.2.1, 3.2.2, 3.2.3, 3.3.4.1, 3.4.1, and 3.7.6

8.2 Description

APLHGR

The APLHGR limit for ATRIUM™-10 fuel shall be equal to the APLHGR Limit from Figure 8.2-1.

The APLHGR limits in Figure 8.2-1 are valid for Main Turbine Bypass Operable and Inoperable and EOC-RPT Operable and Inoperable in Single Loop operation.

Minimum Critical Power Ratio Limit

The MCPR limit is specified as a function of core power, core flow, and plant equipment operability status. The MCPR limit for all fuel types (ATRIUM™-10) shall be the greater of:

- a) Flow-Dependent MCPR value determined from Figure 8.2-2

OR

- b) The Power-Dependent MCPR value determined from one of the following figures, as appropriate:

Figure 8.2-3 : EOC-RPT and Main Turbine Bypass Operable from BOC to EOC

Figure 8.2-4 : Main Turbine Bypass Inoperable / EOC-RPT Operable from BOC to EOC

Figure 8.2-5 : EOC-RPT Inoperable / Main Turbine Bypass Operable from BOC to EOC

The MCPR limits in Figures 8.2-2 through 8.2-5 are valid only for Single Loop operation.


Linear Heat Generation Rate Limit

The LHGR limits for Single Loop Operation are defined in Section 6.0.

Average Power Range Monitor (APRM) Gain And Setpoints


APRM setpoints and the LHGR limit for APRM setpoints for Single Loop operation are defined in Section 7.0.

SSES UNIT 1 CYCLE 13

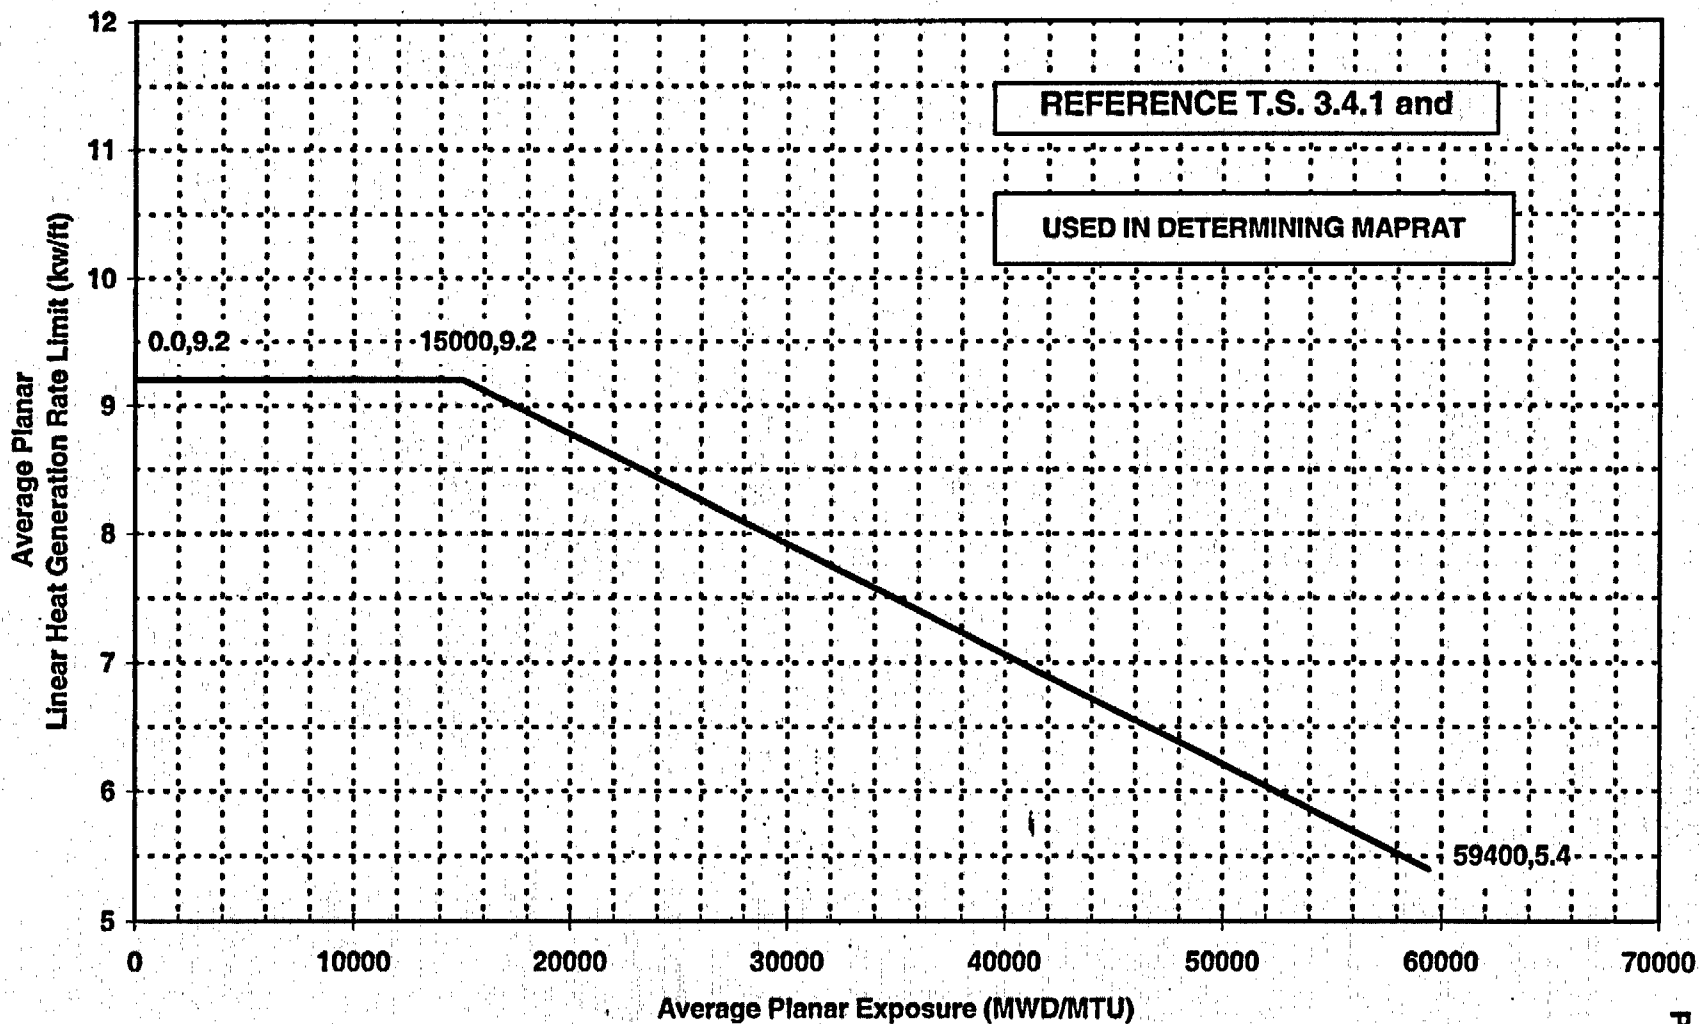


AVERAGE PLANAR LINEAR HEAT GENERATION RATE LIMIT VERSUS AVERAGE PLANAR EXPOSURE
SINGLE LOOP OPERATION
ATRIUM™-10 FUEL
FIGURE 8.2-1

SSES UNIT 1 CYCLE 13

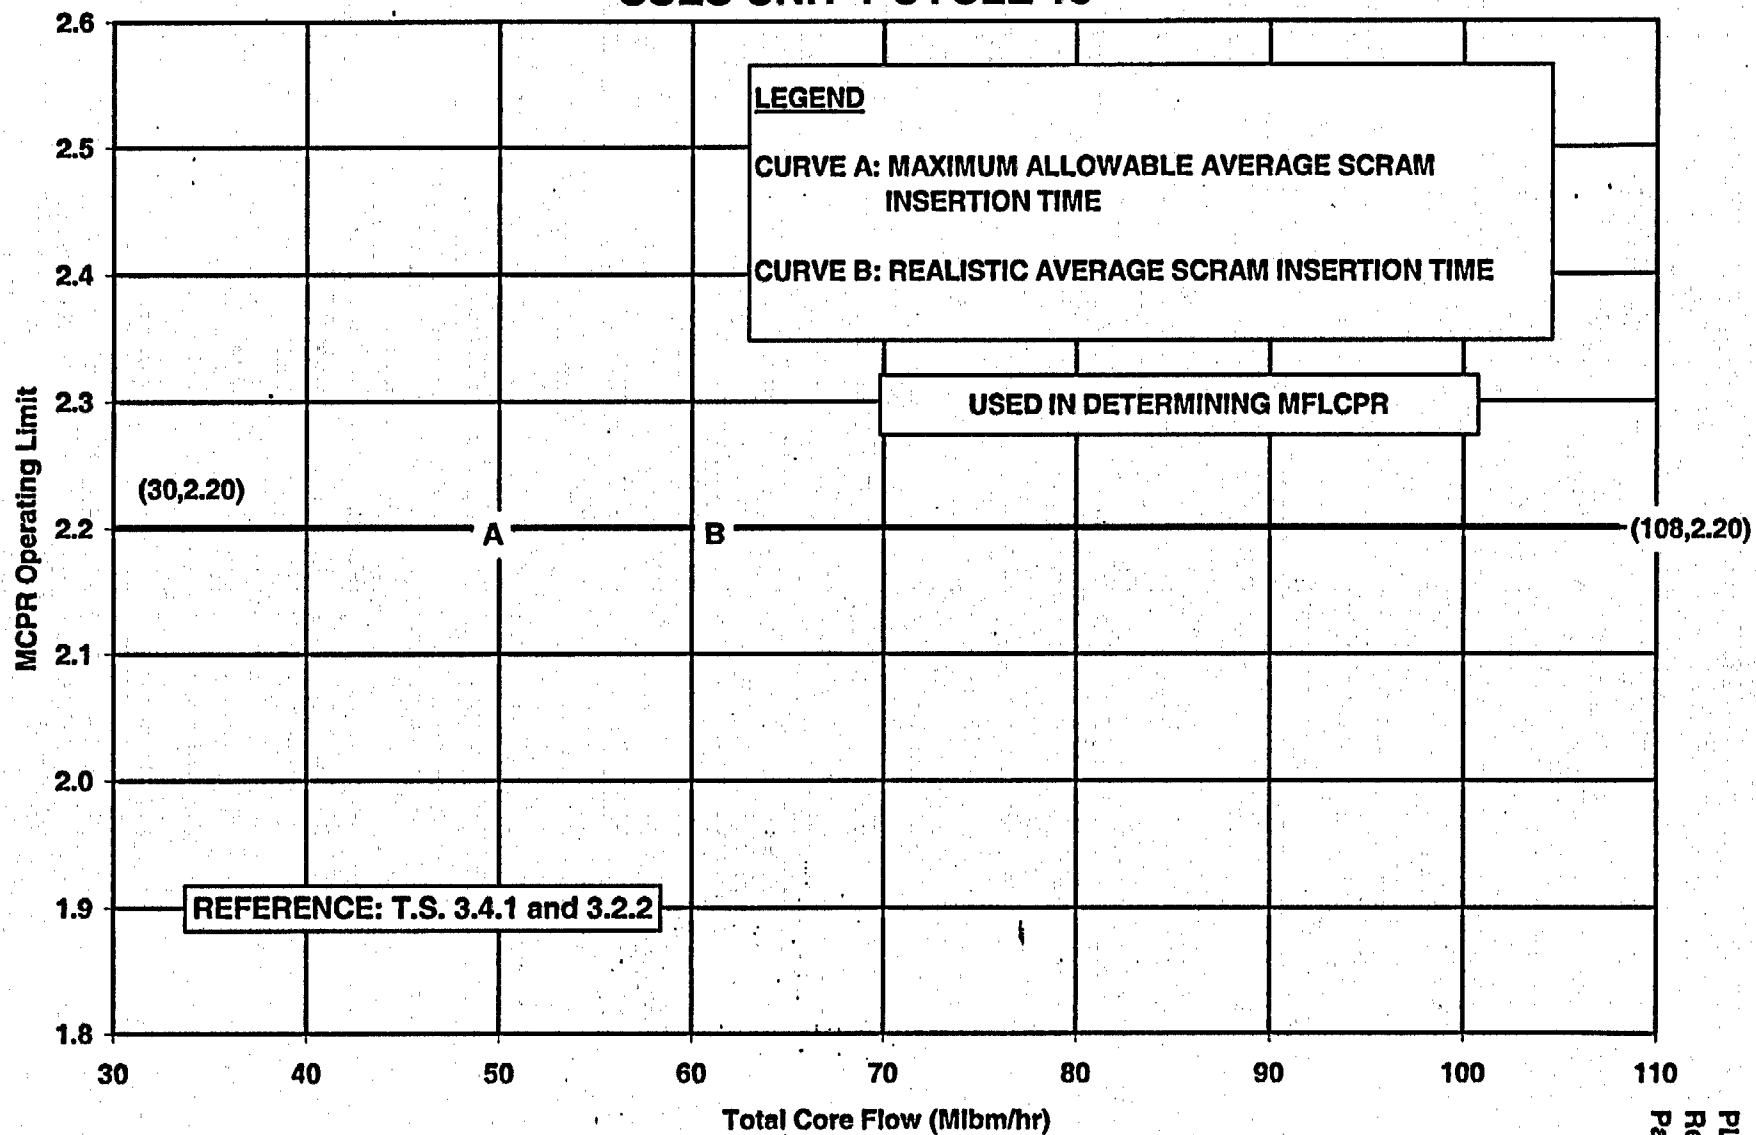


MCPR OPERATING LIMIT VERSUS TOTAL CORE FLOW
SINGLE LOOP OPERATION (BOC to EOC)
FIGURE 8.2-2

SSES UNIT 1 CYCLE 13

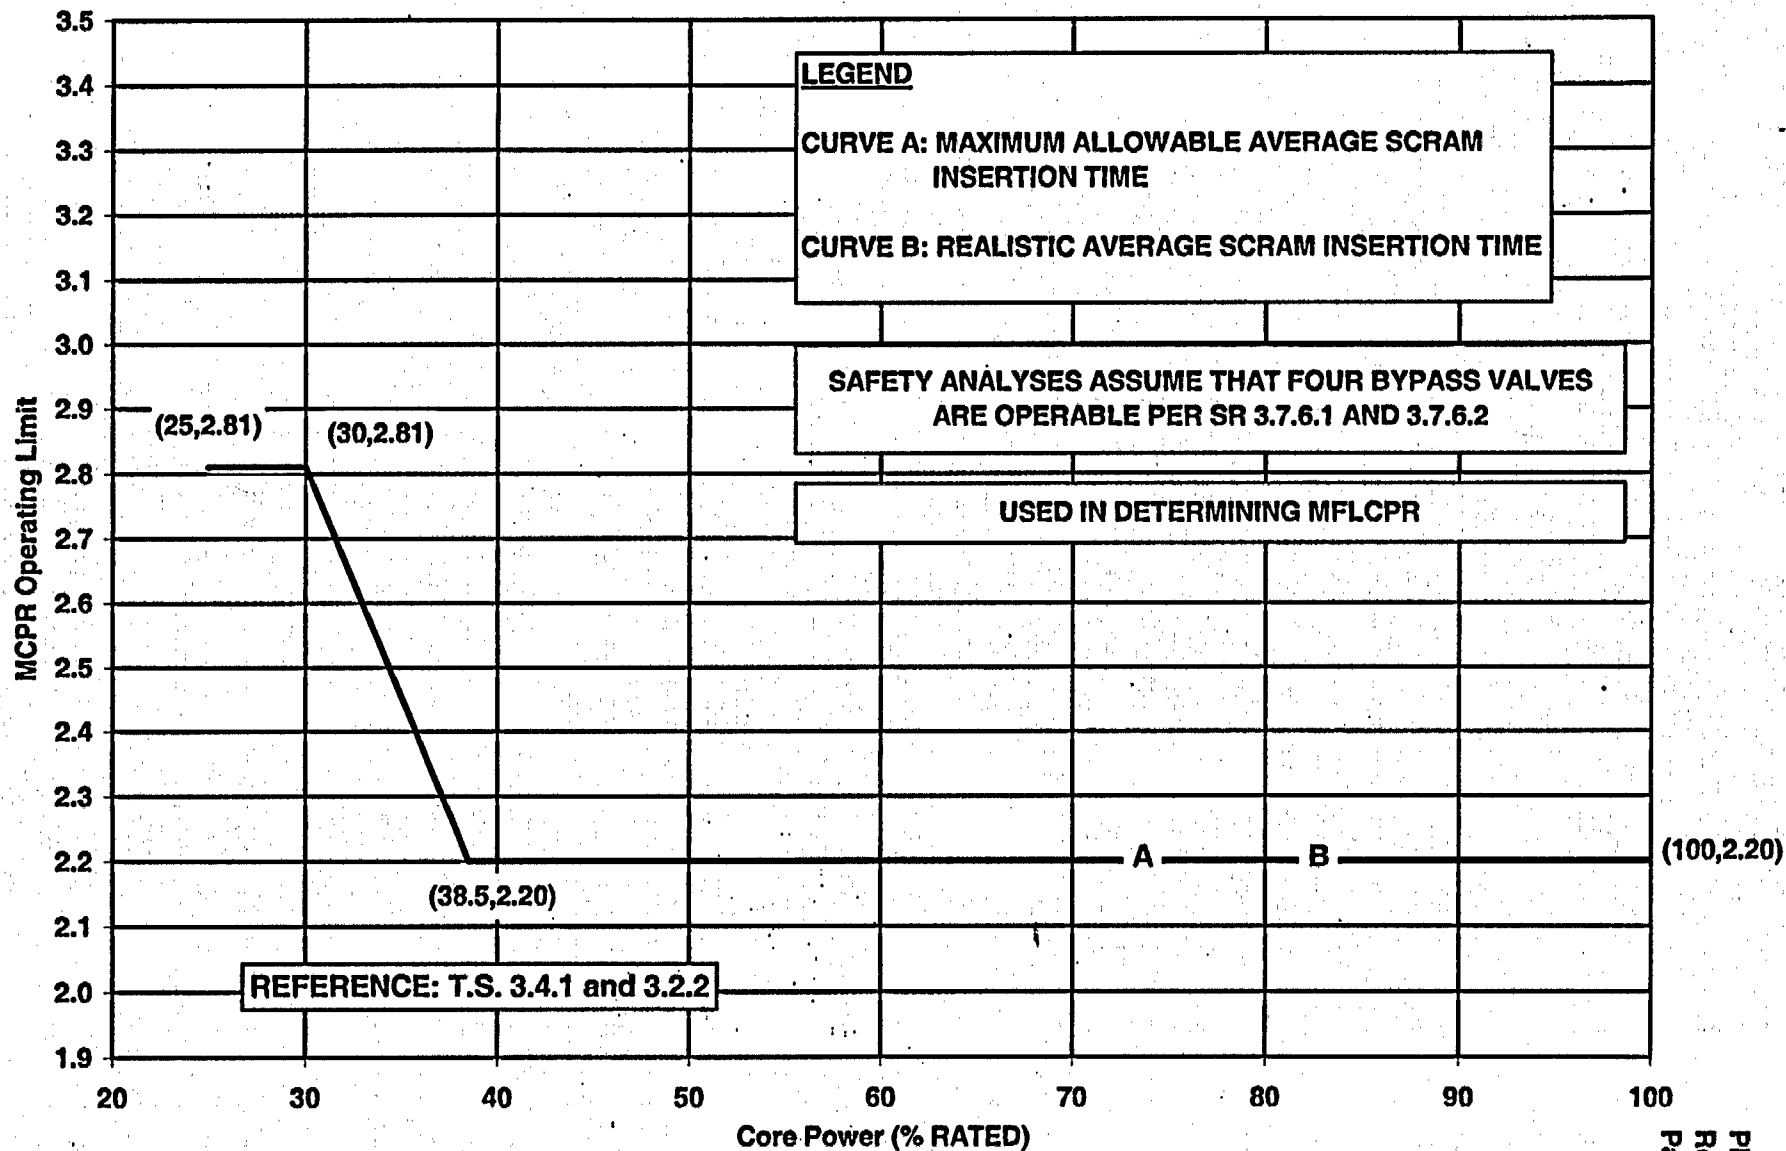


MCLR OPERATING LIMIT VERSUS CORE POWER
EOC-RPT AND MAIN TURBINE BYPASS OPERABLE
SINGLE LOOP OPERATION (BOC to EOC)
FIGURE 8.2-3

SSES UNIT 1 CYCLE 13

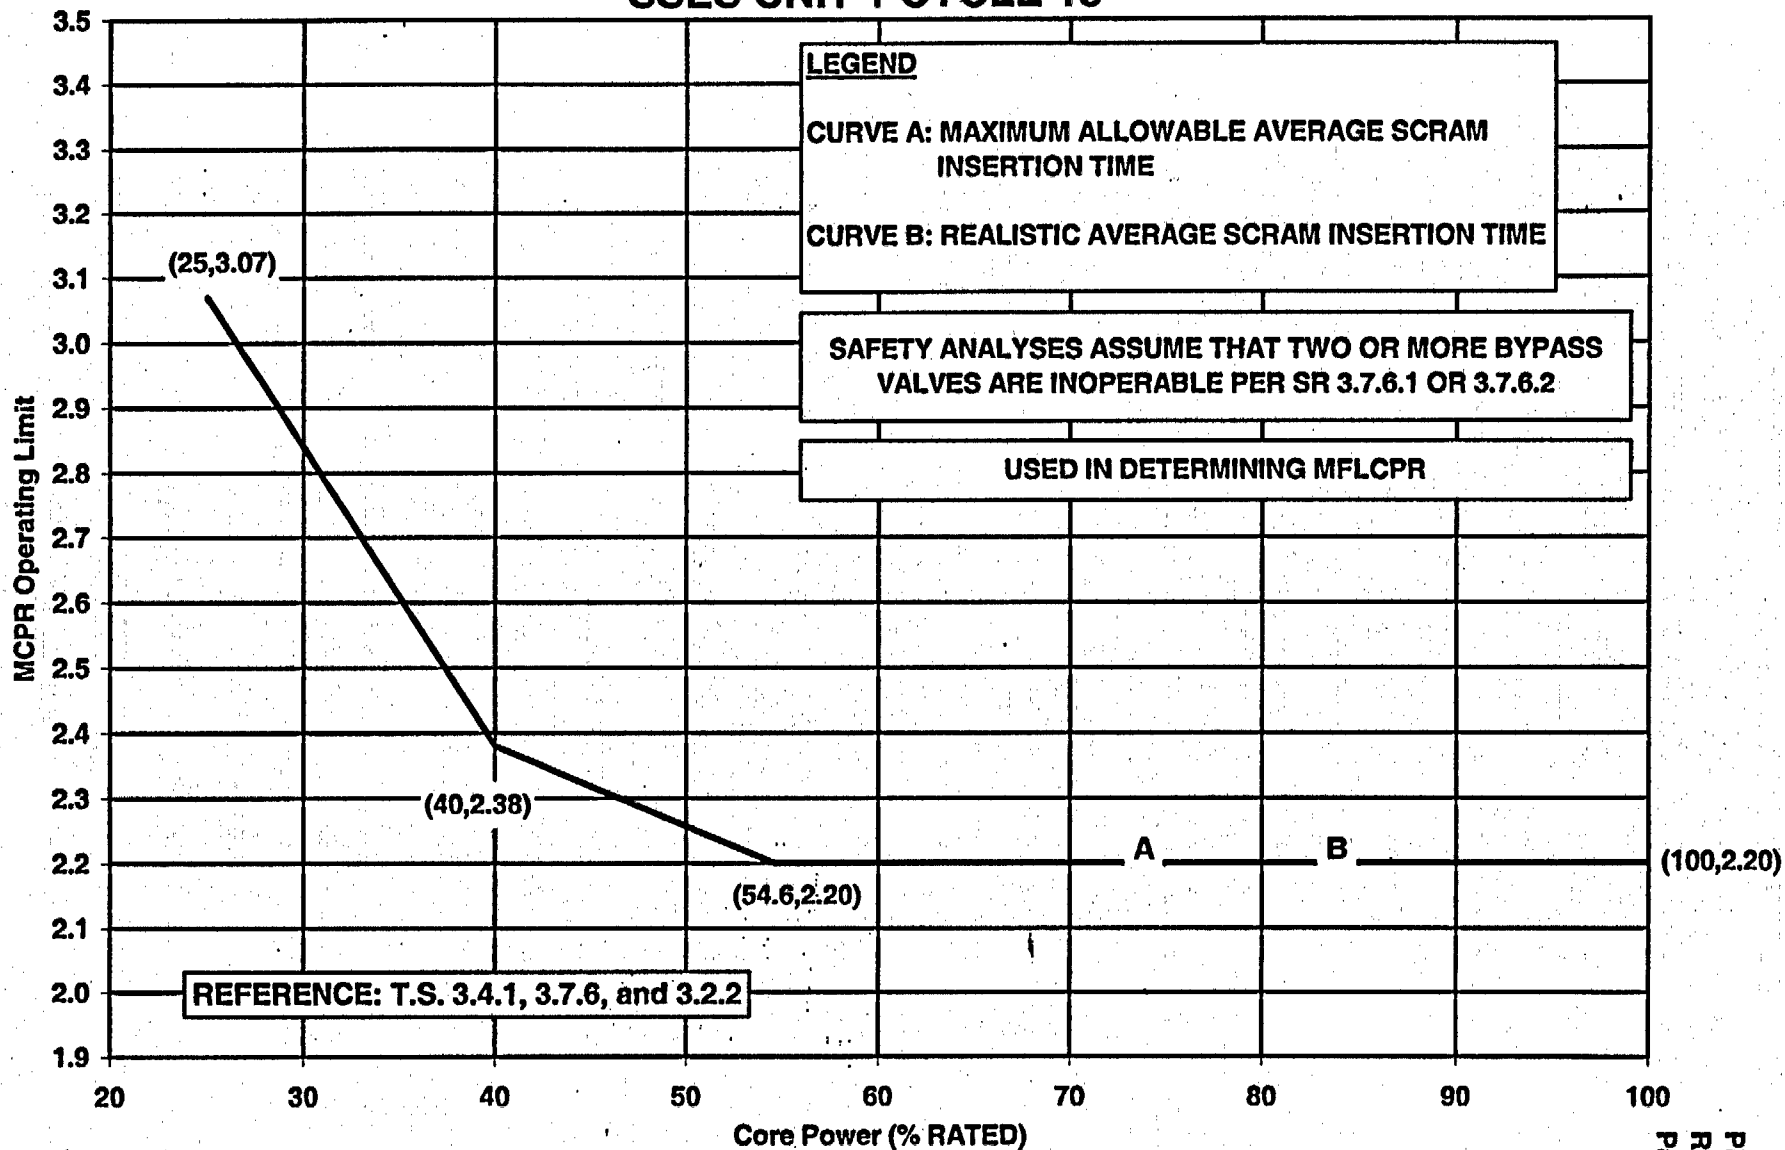

MCPR OPERATING LIMIT VERSUS CORE POWER
MAIN TURBINE BYPASS INOPERABLE / EOC-RPT OPERABLE
SINGLE LOOP OPERATION (BOC to EOC)
FIGURE 8.2-4

SSSES UNIT 1 CYCLE 13

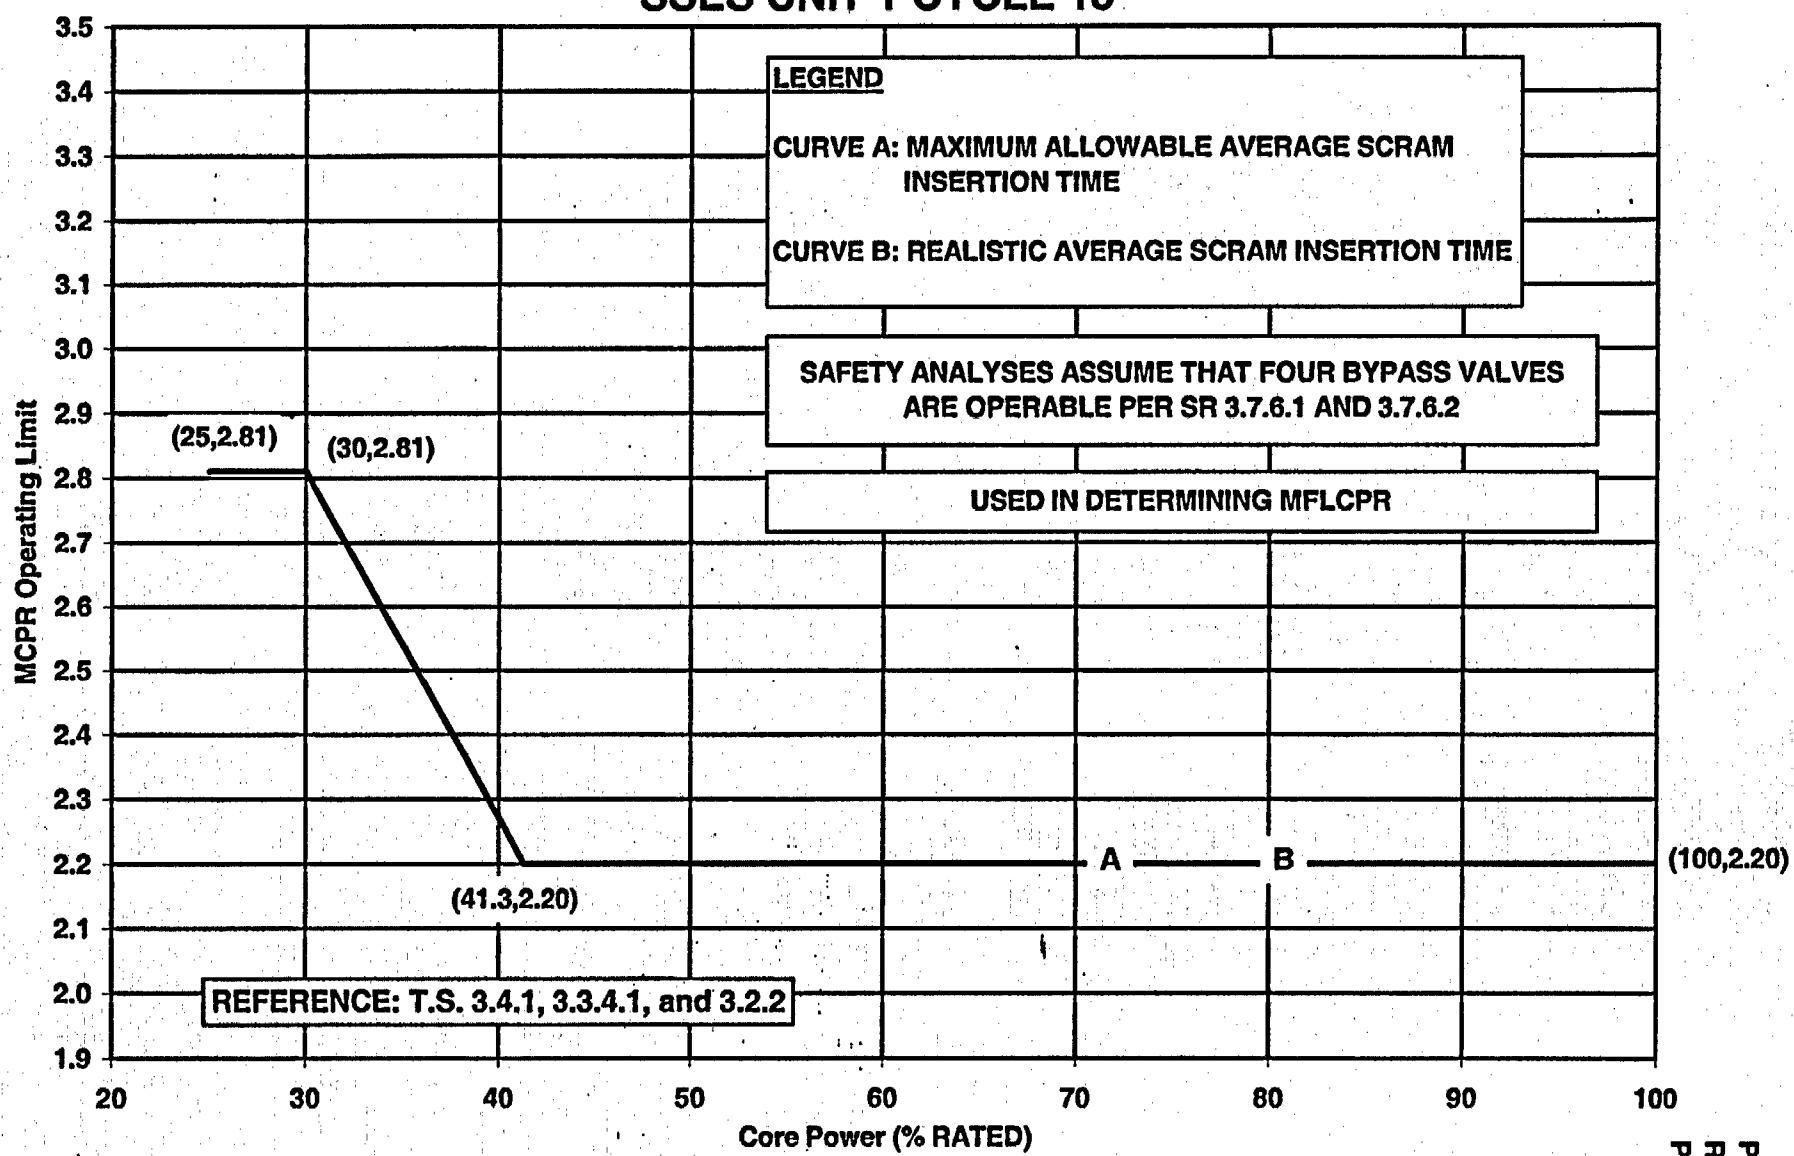

MCPR OPERATING LIMIT VERSUS CORE POWER
EOC-RPT INOPERABLE / MAIN TURBINE BYPASS OPERABLE
SINGLE LOOP OPERATION (BOC to EOC)
FIGURE 8.2-5

9.0 REFERENCES

- 9.1 The analytical methods used to determine the core operating limits shall be those previously reviewed and approved by the NRC, specifically those described in the following documents:
1. PL-NF-90-001-A, "Application of Reactor Analysis Methods for BWR Design and Analysis," July 1992.
 2. XN-NF-80-19(P)(A), Volume 4, Revision 1, "Exxon Nuclear Methodology for Boiling Water Reactors: Application of the ENC Methodology to BWR Reloads," Exxon Nuclear Company, Inc. June 1986.
 3. XN-NF-85-67(P)(A), Revision 1, "Generic Mechanical Design for Exxon Nuclear Jet Pump BWR Reload Fuel," Exxon Nuclear Company, Inc., September 1986.
 4. XN-NF-80-19(A), Volume 1, and Volume 1 Supplements 1 and 2 (March 1983), and Volume 1 Supplement 3 (November 1990), "Exxon Nuclear Methodology for Boiling Water Reactors: Neutronic Methods for Design and Analysis," Exxon Nuclear Company, Inc.
 5. ANF-524(P)(A), Revision 2 and Supplement 1, Revision 2, "Advanced Nuclear Fuels Corporation Critical Power Methodology for Boiling Water Reactors," November 1990.
 6. ANF-1125(P)(A) and ANF-1125(P)(A), Supplement 1, "ANFB Critical Power Correlation," April 1990.
 7. NEDC-32071P, "SAFER/GESTR-LOCA Loss of Coolant Accident Analysis," GE Nuclear Energy, May 1992.
 8. NE-092-001A, Revision 1, "Licensing Topical Report for Power Uprate With Increased Core Flow," Pennsylvania Power & Light Company, December 1992 and NRC SER (November 30, 1993).
 9. PL-NF-90-001, Supplement 1-A, "Application of Reactor Analysis Methods for BWR Design and Analysis: Loss of Feedwater Heating Changes and Use of RETRAN MOD 5.1," August 1995.
 10. PL-NF-94-005-P-A, "Technical Basis for SPC 9x9-2 Extended Fuel Exposure at Susquehanna SES," January 1995.
 11. PL-NF-90-001, Supplement 2-A, "Application of Reactor Analysis Methods for BWR Design and Analysis: CASMO-3G Code and ANFB Critical Power Correlation," July 1996.

12. ANF-89-98(P)(A) Revision 1 and Revision 1 Supplement 1, "Generic Mechanical Design Criteria for BWR Fuel Designs," Advanced Nuclear Fuels Corporation, May 1995.
13. ANF-91-048(P)(A), "Advanced Nuclear Fuels Corporation Methodology for Boiling Water Reactors EXEM BWR Evaluation Model," January 1993.
14. XN-NF-80-19(P)(A), Volumes 2, 2A, 2B, and 2C "Exxon Nuclear Methodology for Boiling Water Reactors: EXEM BWR ECCS Evaluation Model," September 1982.
15. XN-NF-80-19(P)(A), Volume 3 Revision 2 "Exxon Nuclear Methodology for Boiling Water Reactors Thermex: Thermal Limits Methodology Summary Description," January 1987.
16. XN-NF-79-71(P)(A) Revision 2, Supplements 1, 2, and 3, "Exxon Nuclear Plant Transient Methodology for Boiling Water Reactors," March 1986.
17. EMF-1997(P)(A) Revision 0, "ANFB-10 Critical Power Correlation," July 1998, and EMF-1997(P)(A) Supplement 1 Revision 0, "ANFB-10 Critical Power Correlation : High Local Peaking Results," July 1998.
18. PL-NF-90-001, Supplement 3-A, "Application of Reactor Analysis Methods for BWR Design and Analysis: Application Enhancements," September 1999.
19. Caldon, Inc., "TOPICAL REPORT: Improving Thermal Power Accuracy and Plant Safety While Increasing Operating Power Level Using the LEFMTM System," Engineering Report - 80P, March 1997.
20. Caldon, Inc., "Supplement to Topical Report ER-80P: Basis for a Power Uprate with the LEFMTM or LEFM CheckPlusTM System," Revision 0, Engineering Report ER-160P, May 2000.
21. EMF-85-74(P), "RODEX2A (BWR) Fuel Rod Thermal-Mechanical Evaluation Model," Revision 0, Supplements 1 and 2, February 1998.

**MANUAL HARD COPY DISTRIBUTION
DOCUMENT TRANSMITTAL 2003-35826**

USER INFORMATION:

Name: GERLACH*ROSE M EMPL#: 28401 CA#: 0363

Address: NUCSA2

Phone#: 254-3194

TRANSMITTAL INFORMATION:

TO: GERLACH*ROSE M 08/04/2003

LOCATION: USNRC

FROM: NUCLEAR RECORDS DOCUMENT CONTROL CENTER (NUCSA-2)

THE FOLLOWING CHANGES HAVE OCCURRED TO THE HARDCOPY OR ELECTRONIC MANUAL ASSIGNED
TO YOU:

TRM2 - TECHNICAL REQUIREMENTS MANUAL UNIT 2

REMOVE MANUAL TABLE OF CONTENTS DATE: 05/28/2003

ADD MANUAL TABLE OF CONTENTS DATE: 08/01/2003

CATEGORY: DOCUMENTS TYPE: TRM

ID: TRM2

REPLACE: REV:N/A

UPDATES FOR HARD COPY MANUALS WILL BE DISTRIBUTED WITHIN 5 DAYS IN ACCORDANCE WITH
DEPARTMENT PROCEDURES. PLEASE MAKE ALL CHANGES AND ACKNOWLEDGE COMPLETE IN YOUR
NIMS INBOX UPON RECEIPT OF HARD COPY. FOR ELECTRONIC MANUAL USERS, ELECTRONICALLY
REVIEW THE APPROPRIATE DOCUMENTS AND ACKNOWLEDGE COMPLETE IN YOUR NIMS INBOX.

TRM

APPROVED AMENDMENT TO UNIT 2 TECHNICAL REQUIREMENTS MANUAL

EFFECTIVE DATE: 07/28/2003

Replace the following pages of the Technical Requirements Manual with the enclosed pages. The revised pages are identified by Effective Date and contain vertical lines indicating the area of change.

REMOVE PAGES	INSERT PAGES	EFFECTIVE DATE
TRM / LOES-1 through TRM / LOES-6	TRM / LOES-1 through TRM / LOES-6	07/28/2003
TRM / 3.2-2 through TRM / 3.2-35	TRM / 3.2-2 through TRM / 3.2-35	07/28/2003

SUSQUEHANNA STEAM ELECTRIC STATION
LIST OF EFFECTIVE SECTIONS (TECHNICAL REQUIREMENTS MANUAL)

<u>Section</u>	<u>Title</u>	<u>Effective Date</u>
TOC	TABLE OF CONTENTS	05/16/2003
1.0	USE AND APPLICATION	
	Page TRM / 1.0-1	08/31/1998
	Page TRM / 1.0-2	10/04/2002
	Page TRM / 1.0-3	08/31/1998
2.0	PLANT PROGRAMS	
	Page 2.0-1	08/31/1998
	Pages TRM / 2.0-2 through TRM / 2.0-4	06/25/2002
	Pages TRM / 2.0-5 through TRM / 2.0-7	04/12/1999
	Page TRM / 2.0-8	08/30/2001
	Page TRM / 2.0-9	09/06/2002
	Pages TRM / 2.0-10 through TRM / 2.0-12	04/12/1999
	Page TRM / 2.0-13	06/16/2000
3.0	APPLICABILITY	
	Pages TRM / 3.0-1 and TRM / 3.0-2	04/08/1999
	Page TRM / 3.0-3	03/15/2002
	Page TRM / 3.0-4	04/08/1999
3.1	REACTIVITY CONTROL SYSTEMS	
	Pages 3.1-1 through 3.1-6	08/31/1998
	Pages TRM / 3.1-7 and TRM / 3.1-8	06/05/2002
	Pages TRM / 3.1-9 and TRM / 3.1-9a	02/18/1999
	Page TRM / 3.1-10	02/18/1999
3.2	CORE OPERATING LIMITS REPORT	
	Page 3.2-1	08/31/1998
	Pages TRM / 3.2-2 through TRM / 3.2-35	07/28/2003
3.3	INSTRUMENTATION	
	Pages TRM / 3.3-1 through TRM / 3.3-3	07/16/1999
	Page TRM / 3.3-4	11/28/2000
	Pages 3.3-5 through 3.3-8	08/31/1998
	Pages TRM / 3.3-9 and TRM / 3.3-9a	12/17/1998
	Pages TRM / 3.3-10 and TRM / 3.3-11	12/17/1998
	Page TRM / 3.3-12	03/30/2001
	Pages TRM / 3.3-13 through TRM / 3.3-15	12/14/1998
	Page TRM / 3.3-16	06/27/2001
	Pages TRM / 3.3-17 and TRM / 3.3-18	06/14/2002
	Pages TRM / 3.3-19 through TRM / 3.3-20	12/14/1998
	Page 3.3-21	08/31/1998
	Pages TRM / 3.3-22 through TRM / 3.3-24	05/16/2003
	Page TRM / 3.3-25	04/02/1999

SUSQUEHANNA STEAM ELECTRIC STATION
LIST OF EFFECTIVE SECTIONS (TECHNICAL REQUIREMENTS MANUAL)

<u>Section</u>	<u>Title</u>	<u>Effective Date</u>
3.4	REACTOR COOLANT SYSTEM Pages 3.4-1 through 3.4-5 Pages 3.4-6 through 3.4-13	10/23/1998 08/31/1998
3.5	EMERGENCY CORE COOLING AND RCIC Pages 3.5-1 through 3.5-3 Page TRM / 3.5-4 Pages 3.5-5 through 3.5-7	08/31/1998 04/17/2000 08/31/1998
3.6	CONTAINMENT Pages 3.6-1 through 3.6-4 Page TRM / 3.6-5 Page 3.6-6 Pages TRM / 3.6-7 through TRM / 3.6-9	08/31/1998 01/07/2002 08/31/1998 12/31/2002
3.7	PLANT SYSTEMS Pages TRM / 3.7-1 and TRM / 3.7-2 Page 3.7-3 Pages TRM / 3.7-4 through TRM / 3.7-10 Page TRM / 3.7-11 Pages TRM / 3.7-12 through TRM / 3.7-27 Pages TRM / 3.7-28 through TRM / 3.7-32 Page TRM / 3.7-33 Pages TRM / 3.7-34 through TRM / 3.7-36 Pages 3.7-37 through 3.7-39 Pages TRM / 3.7-40 and TRM / 3.7-40a Pages 3.7-41 and 3.7-42 Pages 3.7-43 through 3.7-47 Page TRM / 3.7-48 Pages TRM / 3.7-49 and TRM / 3.7-50 Pages TRM / 3.7-51 and TRM / 3.7-52 Page TRM / 3.7-53	07/29/1999 08/31/1998 08/02/1999 01/21/2000 08/02/1999 11/16/2001 10/05/2002 02/01/1999 08/31/1998 08/11/2000 08/31/1998 10/13/1998 03/08/2003 03/09/2001 04/15/2003 07/29/1999
3.8	ELECTRICAL POWER Pages TRM / 3.8-1 and TRM / 3.8-2 Page 3.8-3 Page TRM / 3.8-4 Pages TRM / 3.8-5 and TRM / 3.8-6 Pages TRM / 3.8-7 through TRM / 3.8-8 Page TRM / 3.8-9 Page 3.8-10 Page TRM / 3.8-11 Page TRM / 3.8-11a Pages 3.8-12 through 3.8-14 Pages TRM / 3.8-15 through TRM / 3.8-17 Page 3.8-18	04/02/2002 08/31/1998 12/31/2002 04/02/2002 08/31/1998 08/24/2001 08/31/1998 04/02/2002 04/02/2002 08/31/1998 04/02/2002 02/01/1999

SUSQUEHANNA STEAM ELECTRIC STATION
LIST OF EFFECTIVE SECTIONS (TECHNICAL REQUIREMENTS MANUAL)

<u>Section</u>	<u>Title</u>	<u>Effective Date</u>
	Page TRM / 3.8-19	04/02/2002
	Page TRM / 3.8-20	02/01/1999
	Pages TRM / 3.8-21 through TRM / 3.8-23	06/06/1999
	Pages 3.8-24 and 3.8-25	08/31/1998
3.9	REFUELING OPERATIONS Pages 3.9-1 through 3.9-3	08/31/1998
3.10	MISCELLANEOUS Pages 3.10-1 through 3.10-4	08/30/1998
	Page TRM / 3.10-5	03/08/2003
	Page TRM / 3.10-6	06/05/2002
	Page TRM / 3.10-7	04/07/2000
		Corrected
	Page TRM / 3.10-8	04/17/2002
3.11	RADIOACTIVE EFFLUENTS Pages 3.11-1 through 3.11-12	08/31/1998
	Pages 3.11-13 through 3.11-16	09/01/1998
	Pages 3.11-17 through 3.11-21	08/31/1998
	Pages TRM / 3.11-22 through TRM / 3.11-24	04/02/2002
	Pages 3.11-25 through 3.11-32	09/01/1998
	Pages 3.11-33 through 3.11-47	08/31/1998
3.12	LOADS CONTROL PROGRAM Pages TRM / 3.12-1 through TRM / 3.12-5	02/05/1999
4.0	ADMINISTRATIVE CONTROLS Pages 4.0-1 through 4.0-8	08/31/1998

SUSQUEHANNA STEAM ELECTRIC STATION
LIST OF EFFECTIVE SECTIONS (TECHNICAL REQUIREMENTS MANUAL)

<u>Section</u>	<u>Title</u>	<u>Effective Date</u>
B 3.0	APPLICABILITY BASES Pages B 3.0-1 through B 3.0-10 Pages TRM / B 3.0-11 through TRM / B 3.0-15	08/31/1998 03/15/2002
B 3.1	REACTIVITY CONTROL SYSTEMS BASES Pages TRM / B 3.1-1 through TRM / B 3.1-3 Page B 3.1-4 Pages TRM / B 3.1-5 through TRM / B 3.1-7 Page TRM / B 3.1-8	07/13/1999 08/31/1998 07/13/1999 02/18/1999
B 3.2	CORE OPERATING LIMITS BASES Page B 3.2-1	08/31/1998
B 3.3	INSTRUMENTATION BASES Page TRM/B 3.3-1 Page B 3.3-2 Pages TRM/B 3.3-3 and TRM / B 3.3-3A Pages TRM / B 3.3-4 through TRM / B 3.3-6 Pages TRM / B 3.3-7 through TRM / B 3.3-9 Pages B 3.3-10 through B 3.3-13 Page TRM / B 3.3-14 Page TRM / B 3.3-14a Page TRM / B 3.3-14b Page B 3.3-15 Page TRM/B 3.3-16 Page B 3.3-17 Pages TRM / B 3.3-20 through TRM / B 3.3-23	04/07/2000 08/31/1998 12/29/2000 03/21/2003 03/30/2001 08/31/1998 06/25/2002 06/14/2002 06/14/2002 08/31/1998 04/07/2000 08/31/1998 05/16/2003
B 3.4	REACTOR COOLANT SYSTEM BASES Pages B 3.4-1 through B 3.4-4 Page TRM / B 3.4-5 Page B 3.4-6	08/31/1998 10/15/1999 08/31/1998
B 3.5	ECCS AND RCIC BASES Pages B 3.5-1 through B 3.5-5	08/31/1998
B 3.6	CONTAINMENT BASES Page TRM / B 3.6-1 Page TRM / B 3.6-2 Page B 3.6-3 Page TRM / B 3.6-4 Page TRM / B 3.6-5 Pages TRM / B 3.6-6 through TRM / B 3.6-11	07/26/2001 02/01/1999 08/31/1998 09/23/1999 01/07/2002 12/31/2002

SUSQUEHANNA STEAM ELECTRIC STATION
LIST OF EFFECTIVE SECTIONS (TECHNICAL REQUIREMENTS MANUAL)

<u>Section</u>	<u>Title</u>	<u>Effective Date</u>
B 3.7	PLANT SYSTEMS BASES	
	Pages B 3.7-1 and B 3.7-2	08/31/1998
	Pages TRM / B 3.7-3 through TRM / B 3.7-7	08/02/1999
	Page TRM / B 3.7-7a	08/02/1999
	Pages TRM / B 3.7-8 through TRM / B 3.7-10	08/02/1999
	Page TRM / B 3.7-10a	08/02/1999
	Pages TRM / B 3.7-11 through TRM / B 3.7-14	08/02/1999
	Page TRM / B 3.7-14a	08/02/1999
	Pages TRM / B 3.7-15 and TRM / B 3.7-16	02/01/1999
	Pages B 3.7-17 through B 3.7-20	08/31/1998
	Pages TRM / B 3.7-21 through TRM/B 3.7-21a	05/11/2001
	Pages TRM/B 3.7-22 and TRM/B 3.7-23	04/07/2000
	Pages B 3.7-24 through B 3.7-30	08/31/1998
	Pages TRM / B 3.7-31 and TRM / B 3.7-32	03/09/2001
	Page TRM / B 3.7-33	04/15/2003
	Pages TRM / B 3.7-34 and TRM / B 3.7-35	07/05/2000
B 3.8	ELECTRICAL POWER BASES	
	Pages TRM / B 3.8-1 and TRM / B 3.8-2	04/02/2002
	Page TRM / B 3.8-2a	04/02/2002
	Page TRM / B 3.8-3	04/02/2002
	Page TRM / B 3.8-3a	04/02/2002
	Page TRM / B 3.8-4	04/02/2002
	Page TRM / B 3.8-4a	04/02/2002
	Page TRM / B 3.8-5	08/31/1998
	Pages TRM / B 3.8-6 through TRM / B 3.8-17	04/02/2002
B.3.9	REFUELING OPERATIONS BASES	
	Pages B 3.9-1 and B 3.9-2	08/31/1998
	Pages B 3.9-3 through B 3.9-7	10/23/1998
B 3.10	MISCELLANEOUS BASES	
	Pages B 3.10-1 through B 3.10-2	08/31/1998
	Page TRM / B 3.10-3	03/08/2003
	Pages TRM / B 3.10-4 and TRM / B 3.10-5	08/23/1999
	Pages TRM / B 3.10-6 and TRM / 3.10-7	04/17/2002
B 3.11	RADIOACTIVE EFFLUENTS BASES	
	Pages B 3.11-1 through B 3.11-9	08/31/1998
	Pages TRM / B 3.11-10	02/01/1999
	Pages TRM/B 3.11-11 and TRM/B 3.11-11a	04/07/2000
	Pages TRM/B 3.11-12 and TRM/B 3.11-13	02/01/1999
	Page TRM / B 3.11-14	11/01/1999
	Page TRM / B 3.11-15	02/01/1999
	Pages B 3.11-16 through B 3.11-19	08/31/1998
	Page TRM / B 3.11-20	04/02/2002

SUSQUEHANNA STEAM ELECTRIC STATION
LIST OF EFFECTIVE SECTIONS (TECHNICAL REQUIREMENTS MANUAL)

<u>Section</u>	<u>Title</u>	<u>Effective Date</u>
	Page TRM / B 3.11-20a	04/02/2002
	Pages TRM / B 3.11-21 through TRM / B 3.11-23	04/02/2002
	Page TRM / B 3.11-23a	04/02/2002
	Page TRM / B 3.11-24	03/21/2003
	Page TRM / B 3.11-25	04/15/2003
	Pages B 3.11-26 through B 3.11-35	08/31/1998
	Pages TRM / B 3.11-36	02/12/1999
B.3.12	LOADS CONTROL PROGRAM BASES	
	Pages TRM / B 3.12-1 through TRM / B 3.12-3	02/05/1999

g:\Lic Docs\TRM-Word\TRMManual\0.00Lists\Unit 2\U2TRM-LOES.doc

Susquehanna SES Unit 2 Cycle 12

CORE OPERATING LIMITS REPORT

**Nuclear Fuels
Engineering**

July 2003



**CORE OPERATING LIMITS REPORT
REVISION DESCRIPTION INDEX**

Rev. No.	Affected Sections	Description/Purpose of Revision
0	ALL	Issuance of this COLR is in support of Unit 2 Cycle 12 operation.
1	5.0 6.0 8.0	<p>This revision adds a text box to all appropriate plots. This text box indicates that for all bypass operable cases, four bypass valves are assumed operable. For the bypass inoperable cases, the text box indicates that two or more bypass valves are assumed inoperable.</p> <p>This revision was generated in response to Facility Operating License Amendment 185 which altered SR 3.7.6.1.</p> <p>This revision is administrative in nature and no underlying calculations or plotted data were altered.</p>

SUSQUEHANNA STEAM ELECTRIC STATION
Unit 2 Cycle 12
CORE OPERATING LIMITS REPORT

Table of Contents

1.0	<u>INTRODUCTION</u>	4
2.0	<u>DEFINITIONS</u>	5
3.0	<u>SHUTDOWN MARGIN</u>	6
4.0	<u>AVERAGE PLANAR LINEAR HEAT GENERATION RATE (APLHGR)</u>	7
5.0	<u>MINIMUM CRITICAL POWER RATIO (MCPR)</u>	9
6.0	<u>LINEAR HEAT GENERATION RATE (LHGR)</u>	20
7.0	<u>AVERAGE POWER RANGE MONITOR (APRM) GAIN AND SETPOINTS</u>	23
8.0	<u>RECIRCULATION LOOPS - SINGLE LOOP OPERATION</u>	26
9.0	<u>REFERENCES</u>	33

1.0 INTRODUCTION

This CORE OPERATING LIMITS REPORT for Susquehanna Unit 2 Cycle 12 is prepared in accordance with the requirements of Susquehanna Unit 2, Technical Specification 5.6.5. As required by Technical Specifications 5.6.5, core shutdown margin, the core operating limits and APRM setpoints presented herein were developed using NRC-approved methods and are established such that all applicable limits of the plant safety analysis are met.

2.0 DEFINITIONS

Terms used in this COLR but not defined in Section 1.0 of the Technical Specifications or Section 1.1 of the Technical Requirements Manual are provided below.

- 2.1 The AVERAGE BUNDLE EXPOSURE shall be equal to the total energy produced by the bundle divided by the total initial weight of uranium in the fuel bundle.
- 2.2 The AVERAGE PLANAR EXPOSURE at a specified height shall be equal to the total energy produced per unit length at the specified height divided by the total initial weight of uranium per unit length at that height.
- 2.3 The FRACTION OF LIMITING POWER DENSITY (FLPD) shall be the LHGR existing at a given height divided by the applicable LHGR for APRM Setpoint Limit for that bundle type.
- 2.4 The FRACTION OF RATED THERMAL POWER (FRTPT) shall be the measured THERMAL POWER divided by the RATED THERMAL POWER.
- 2.5 FDLRX is the ratio of the maximum LHGR calculated by the core monitoring system for each fuel bundle divided by the LHGR limit for the applicable fuel bundle type.
- 2.6 MFLCPR is the ratio of the applicable MCPR operating limit for the applicable fuel bundle type divided by the MCPR calculated by the core monitoring system for each fuel bundle.
- 2.7 MAPRAT is the ratio of the maximum APLHGR calculated by the core monitoring system for each fuel bundle divided by the APLGHR limit for the applicable fuel bundle type.
- 2.8 FDLRC is the ratio of the maximum LHGR calculated by the core monitoring system for each fuel bundle divided by the LHGR for APRM Setpoint Limit for the applicable fuel bundle type.

3.0 SHUTDOWN MARGIN

3.1 Technical Specification Reference

Technical Specification 3.1.1

3.2 Description

The SHUTDOWN MARGIN shall be equal to or greater than:

a) 0.38% $\Delta k/k$ with the highest worth rod analytically determined

OR

b) 0.28% $\Delta k/k$ with the highest worth rod determined by test

Since core reactivity will vary during the cycle as a function of fuel depletion and poison burnup, Beginning of Cycle (BOC) SHUTDOWN MARGIN (SDM) tests must also account for changes in core reactivity during the cycle. Therefore, the SDM measured at BOC must be equal to or greater than the applicable requirement from either 3.2.a or 3.2.b plus an adder, "R". The adder, "R", is the difference between the calculated value of maximum core reactivity (that is, minimum SDM) during the operating cycle and the calculated BOC core reactivity. If the value of "R" is zero (that is, BOC is the most reactive point in the cycle) no correction to the BOC measured value is required.

The SHUTDOWN MARGIN limits provided in 3.2a and 3.2b are applicable in MODES 1, 2, 3, 4, and 5. This includes core shuffling.

4.0 AVERAGE PLANAR LINEAR HEAT GENERATION RATE (APLHGR)

4.1 Technical Specification Reference


Technical Specification 3.2.1

4.2 Description

The APLHGRs for ATRIUMTM-10 fuel shall not exceed the limit shown in Figure 4.2-1.

The APLHGR limits in Figure 4.2-1 are valid for Main Turbine Bypass Operable and Inoperable and EOC-RPT Operable and Inoperable in Two Loop operation. The APLHGR limits for Single Loop operation are provided in Section 8.0.

SSS UNIT 2 CYCLE 12

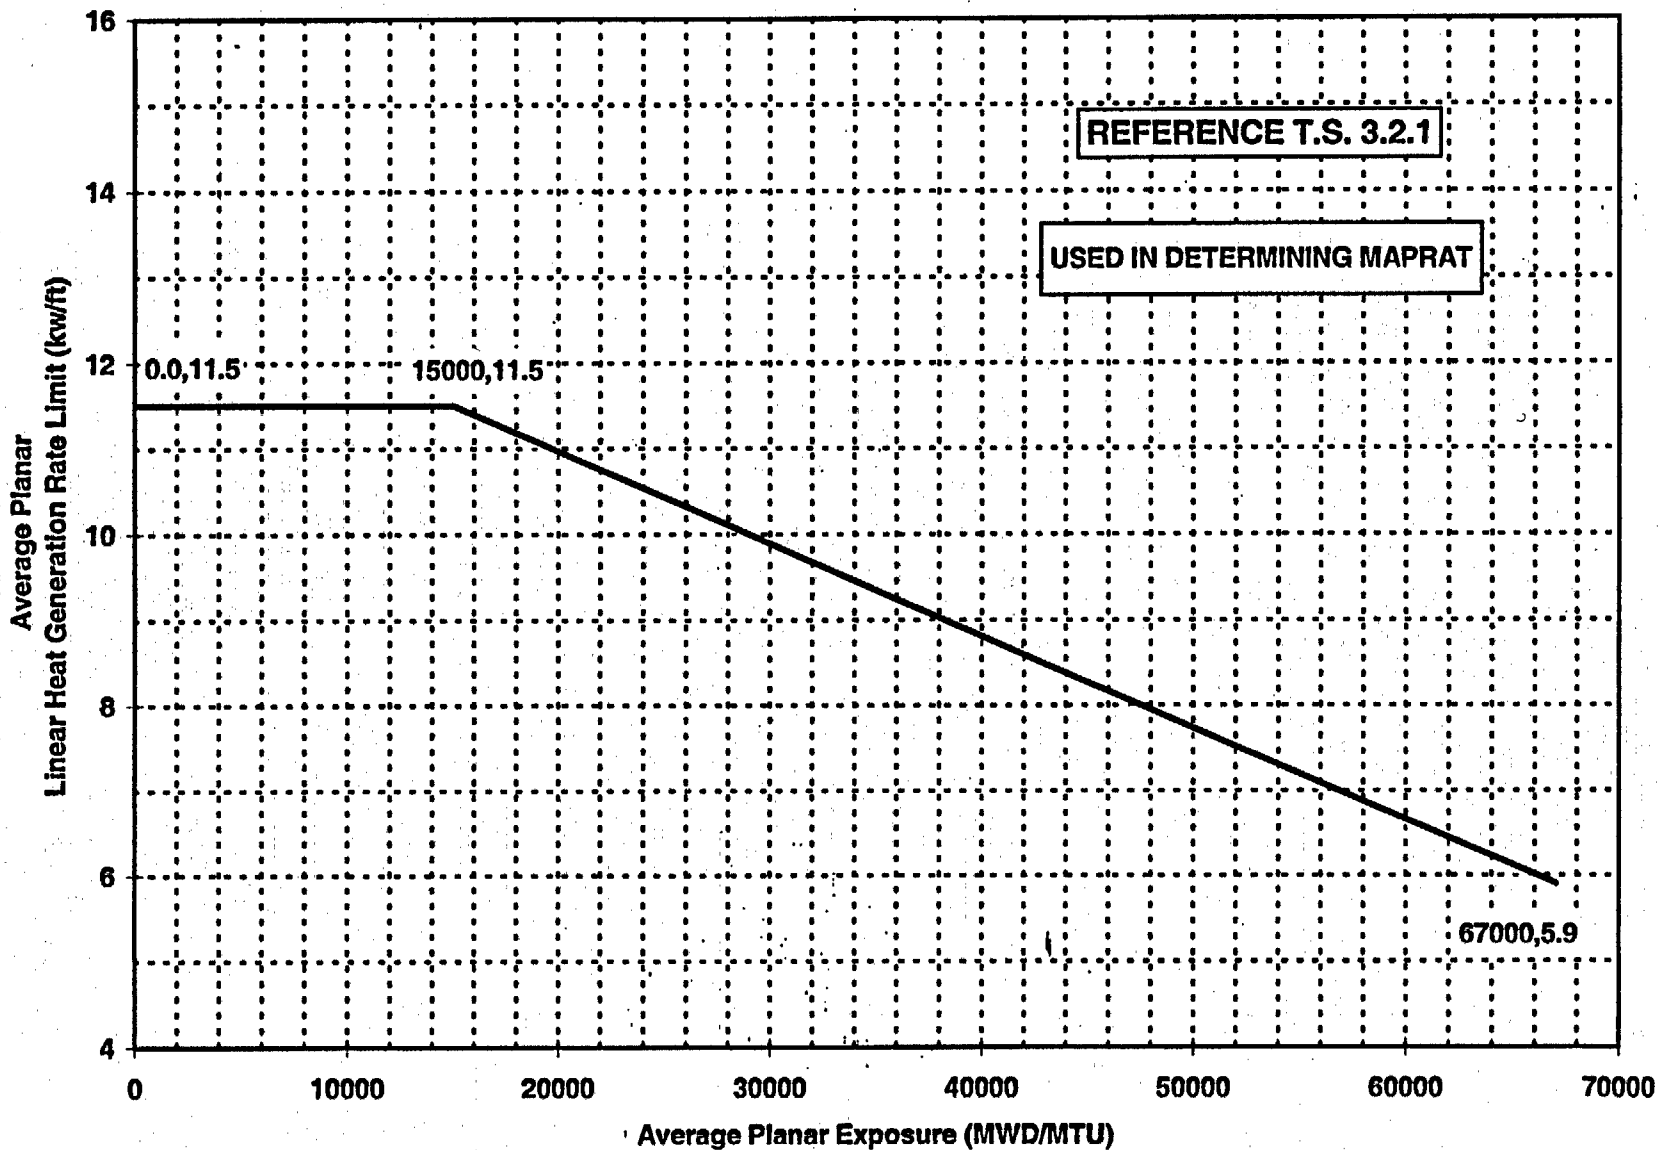

AVERAGE PLANAR LINEAR HEAT GENERATION RATE LIMIT VERSUS
AVERAGE PLANAR EXPOSURE TWO LOOP OPERATION
ATRIUM™-10 FUEL
FIGURE 4.2-1

5.0 MINIMUM CRITICAL POWER RATIO (MCPR)

5.1 Technical Specification Reference

Technical Specification 3.2.2, 3.7.6, and 3.3.4.1

5.2 Description

The MCPR limit is specified as a function of core power, core flow, average scram insertion time per Section 5.3 and plant equipment operability status. The MCPR limits for all fuel types (ATRIUM™-10) shall be the greater of the Flow-Dependent or the Power-Dependent MCPR, depending on the applicable equipment operability status.

a) EOC-RPT and Main Turbine Bypass Operable

Figure 5.2-1: Flow-Dependent MCPR value determined from BOC to EOC

Figure 5.2-2: Power-Dependent MCPR value determined from BOC to EOC

b) Main Turbine Bypass Inoperable / EOC-RPT Operable

Figure 5.2-3: Flow-Dependent MCPR value determined from BOC to EOC

Figure 5.2-4: Power-Dependent MCPR value determined from BOC to EOC

c) EOC-RPT Inoperable / Main Turbine Bypass Operable

Figure 5.2-5: Flow-Dependent MCPR value determined from BOC to EOC

Figure 5.2-6: Power-Dependent MCPR value determined from BOC to EOC

The MCPR limits in Figures 5.2-1 through 5.2-6 are valid for Two Loop operation.


The MCPR limits for Single Loop operation are provided in Section 8.0.

5.3 Average Scram Time Fraction

Table 5.3-1 provides the relationship between average scram time to control rod position and scram time fraction. The evaluation of scram insertion time data, as it relates to the attached table should be performed per Reactor Engineering procedures.


EOC-RPT and Main Turbine Bypass Operable

SSES UNIT 2 CYCLE 12

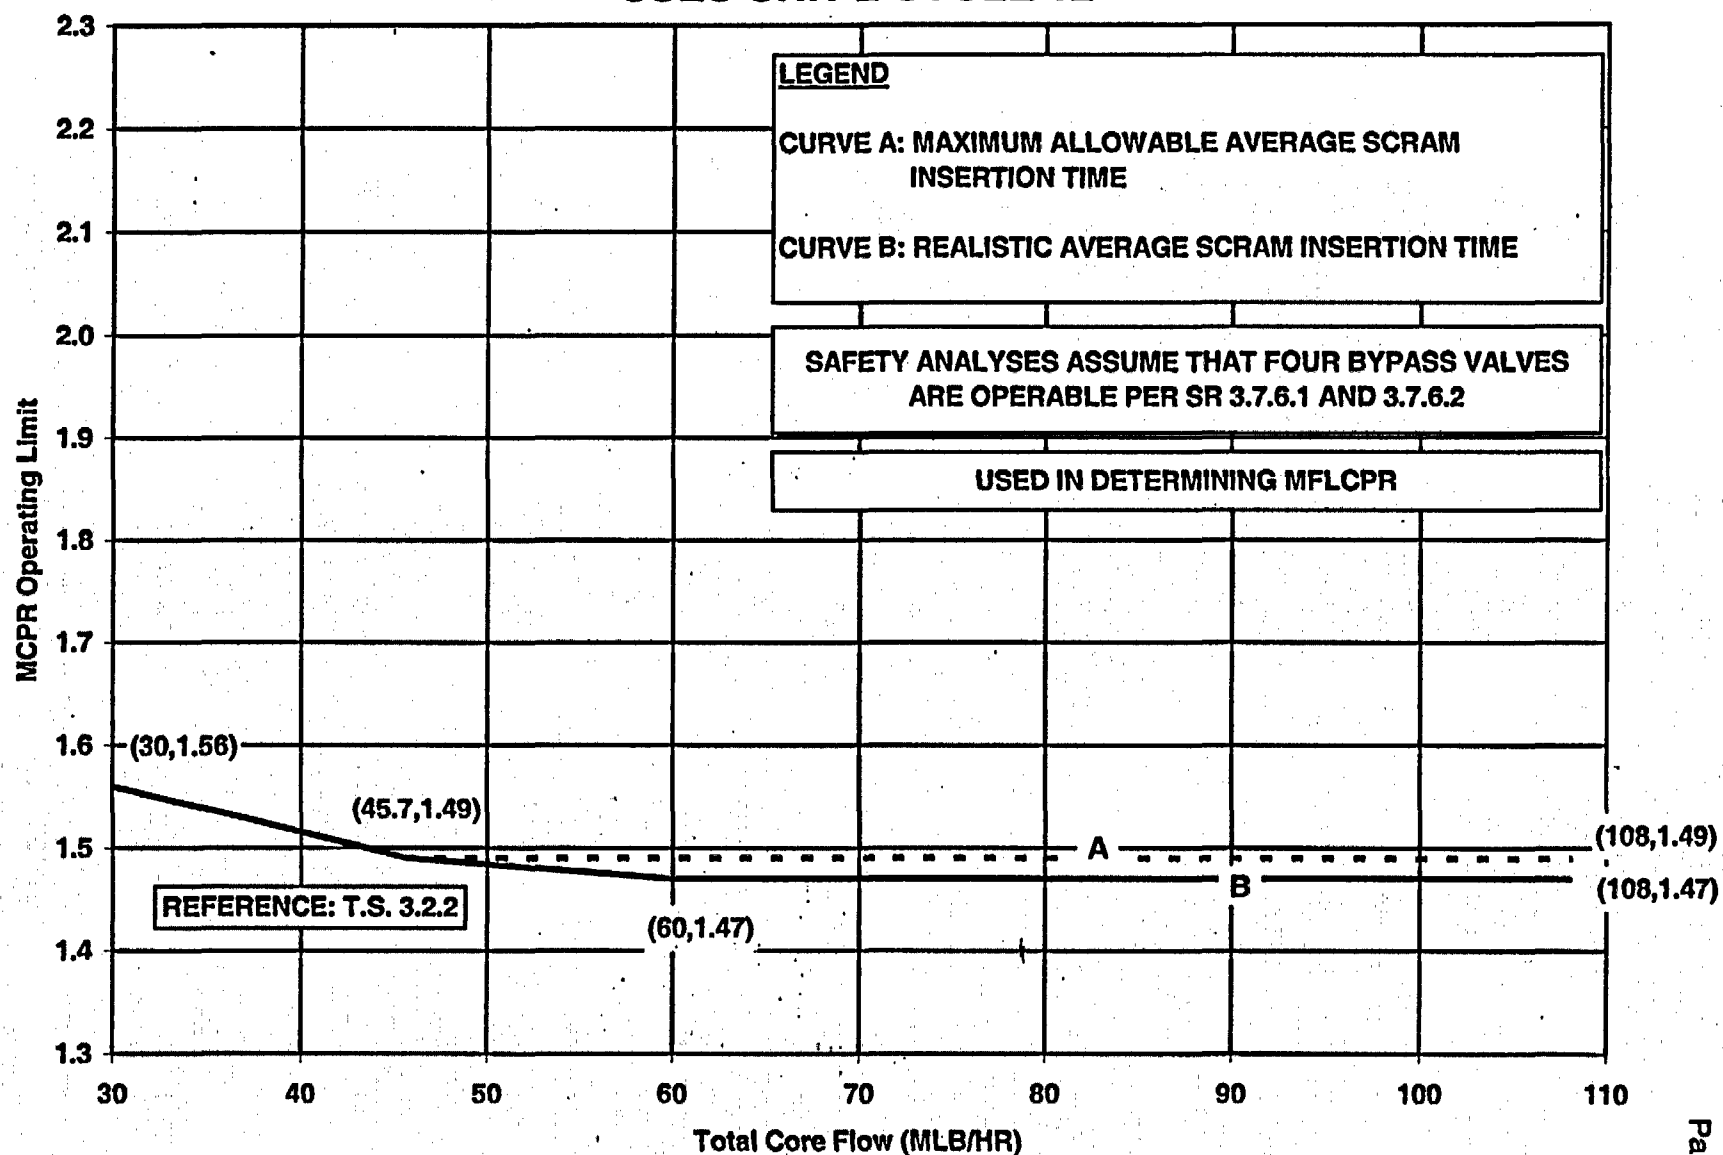

MCPR OPERATING LIMIT VERSUS TOTAL CORE FLOW
EOC-RPT AND MAIN TURBINE BYPASS OPERABLE
TWO LOOP OPERATION (BOC TO EOC)
FIGURE 5.2-1


SSES UNIT 2 CYCLE 12

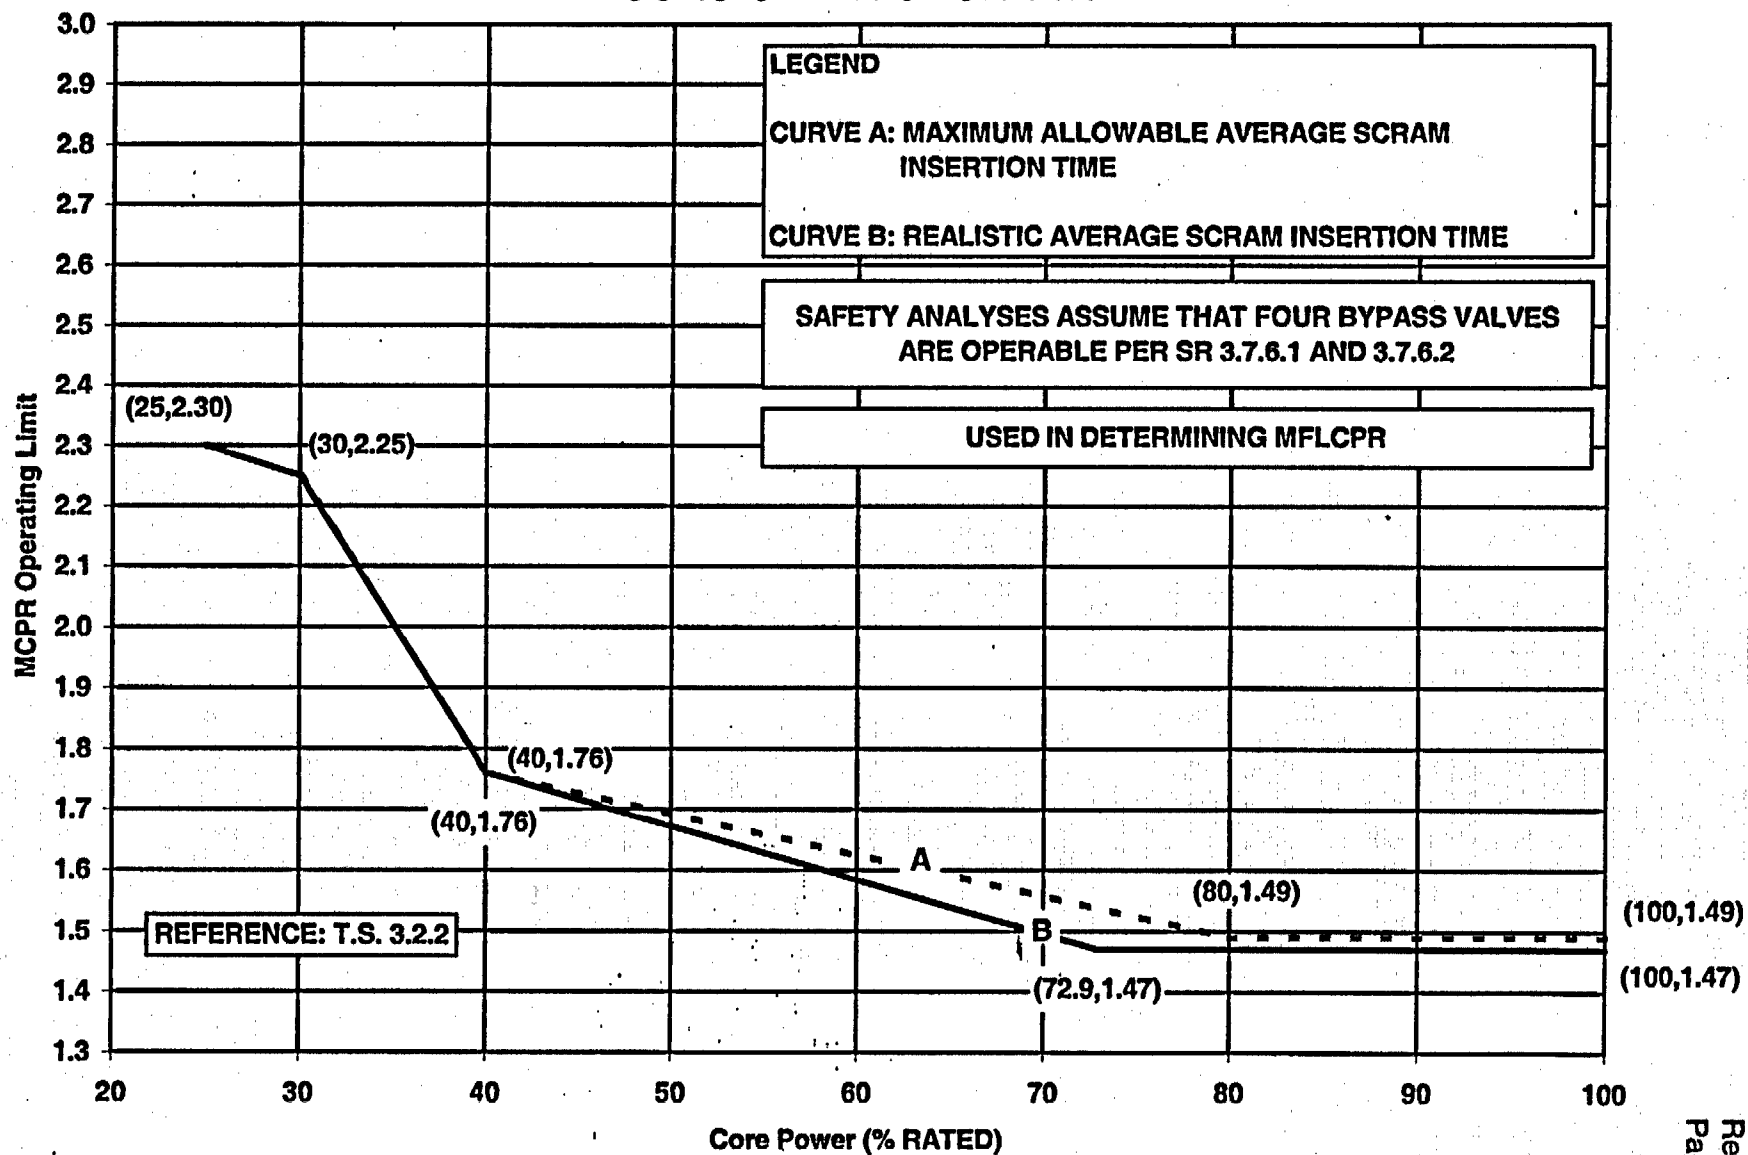

MCPR OPERATING LIMIT VERSUS CORE POWER
EOC-RPT AND MAIN TURBINE BYPASS OPERABLE
TWO LOOP OPERATION (BOC TO EOC)
FIGURE 5.2-2


Main Turbine Bypass Inoperable / EOC-RPT Operable

SSES UNIT 2 CYCLE 12

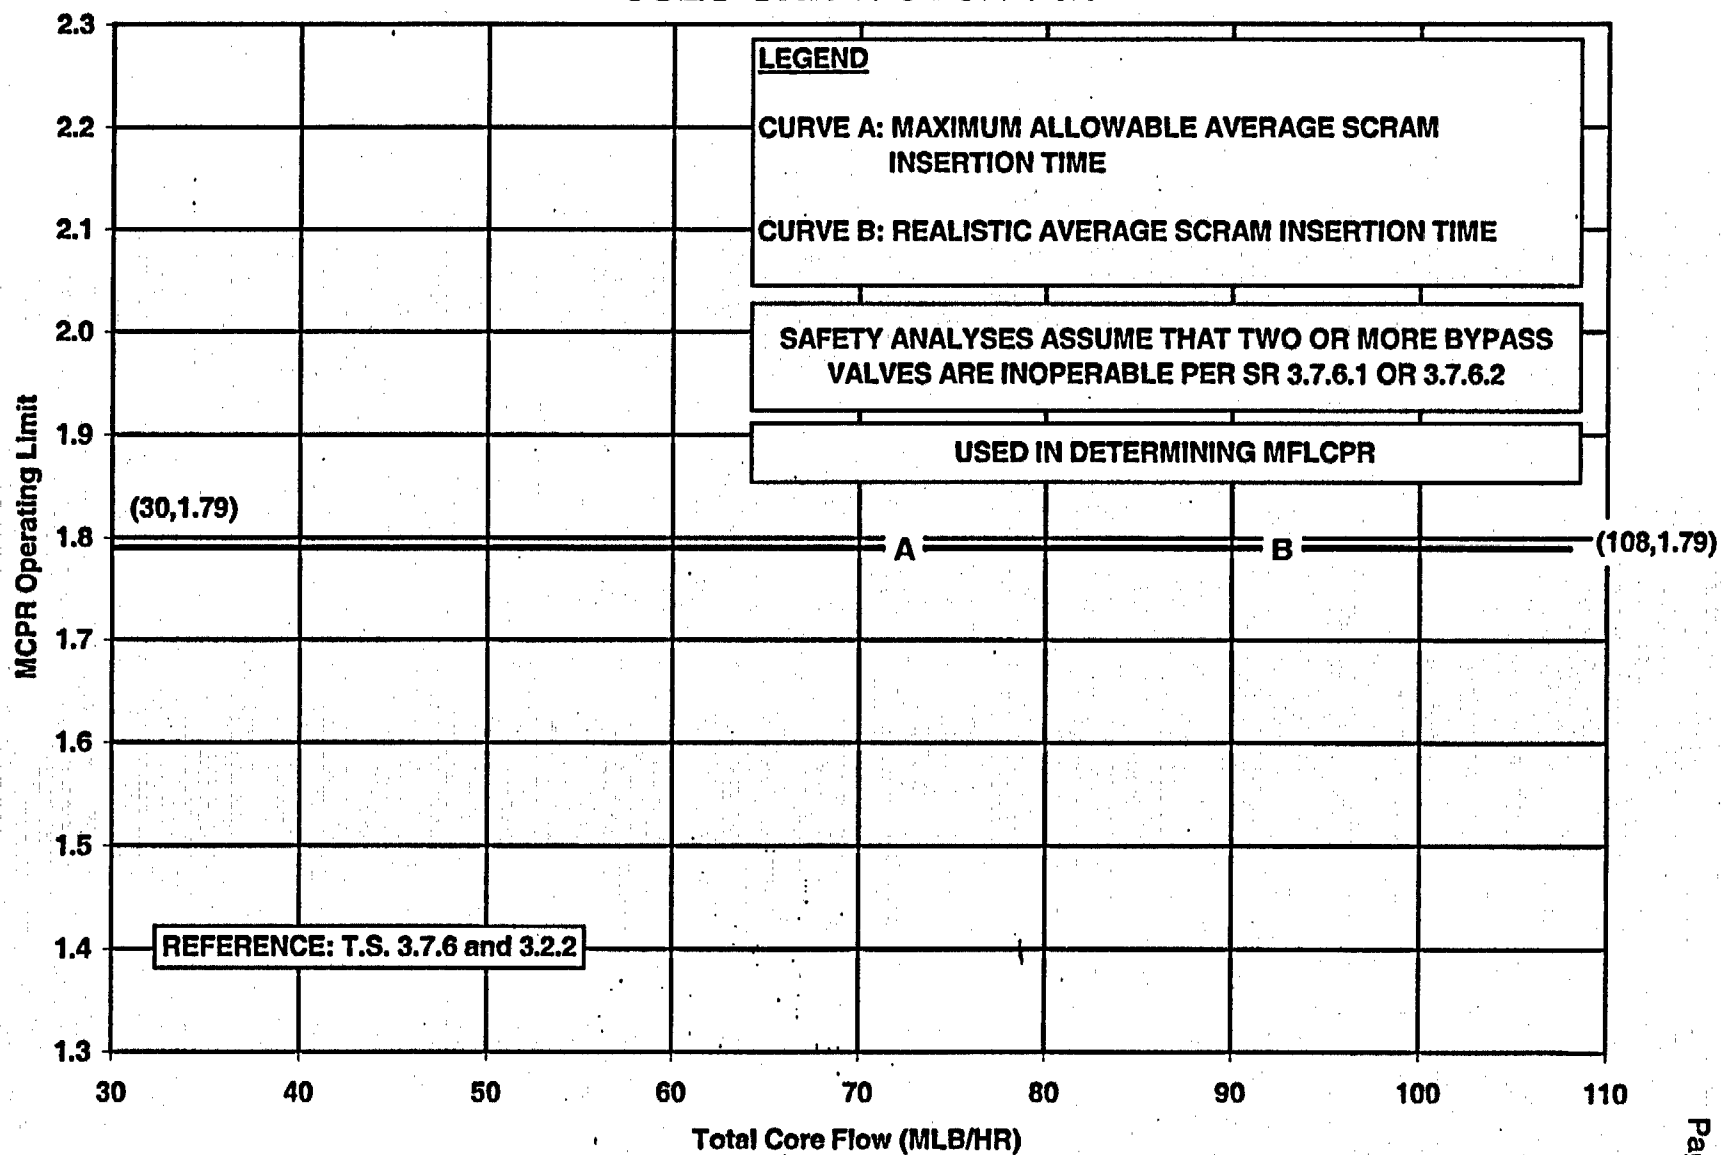

MCPR OPERATING LIMIT VERSUS TOTAL CORE FLOW
MAIN TURBINE BYPASS INOPERABLE / EOC-RPT OPERABLE
TWO LOOP OPERATION (BOC TO EOC)
FIGURE 5.2-3


SSES UNIT 2 CYCLE 12

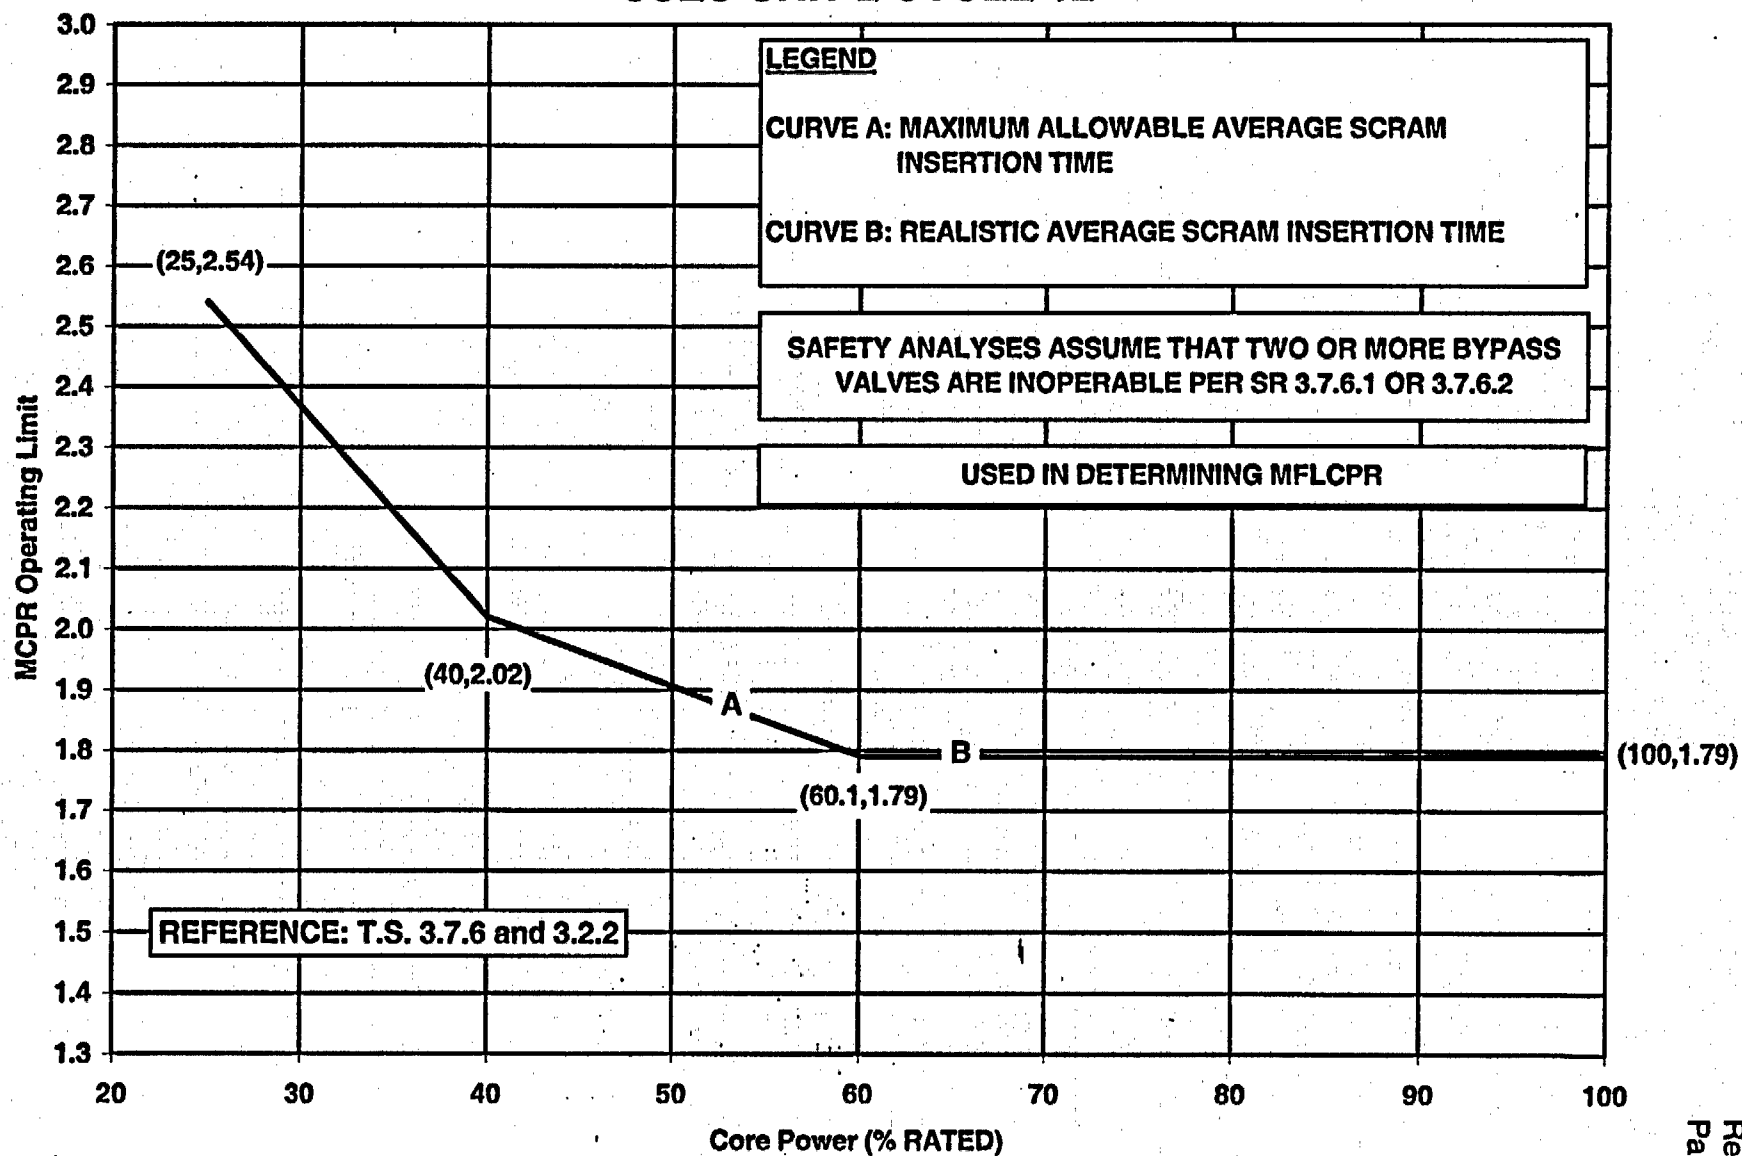

**M CPR OPERATING LIMIT VERSUS CORE POWER
MAIN TURBINE BYPASS INOPERABLE / EOC-RPT OPERABLE
TWO LOOP OPERATION (BOC to EOC)
FIGURE 5.2-4**


EOC-RPT Inoperable / Main Turbine Bypass Operable

SSES UNIT 2 CYCLE 12

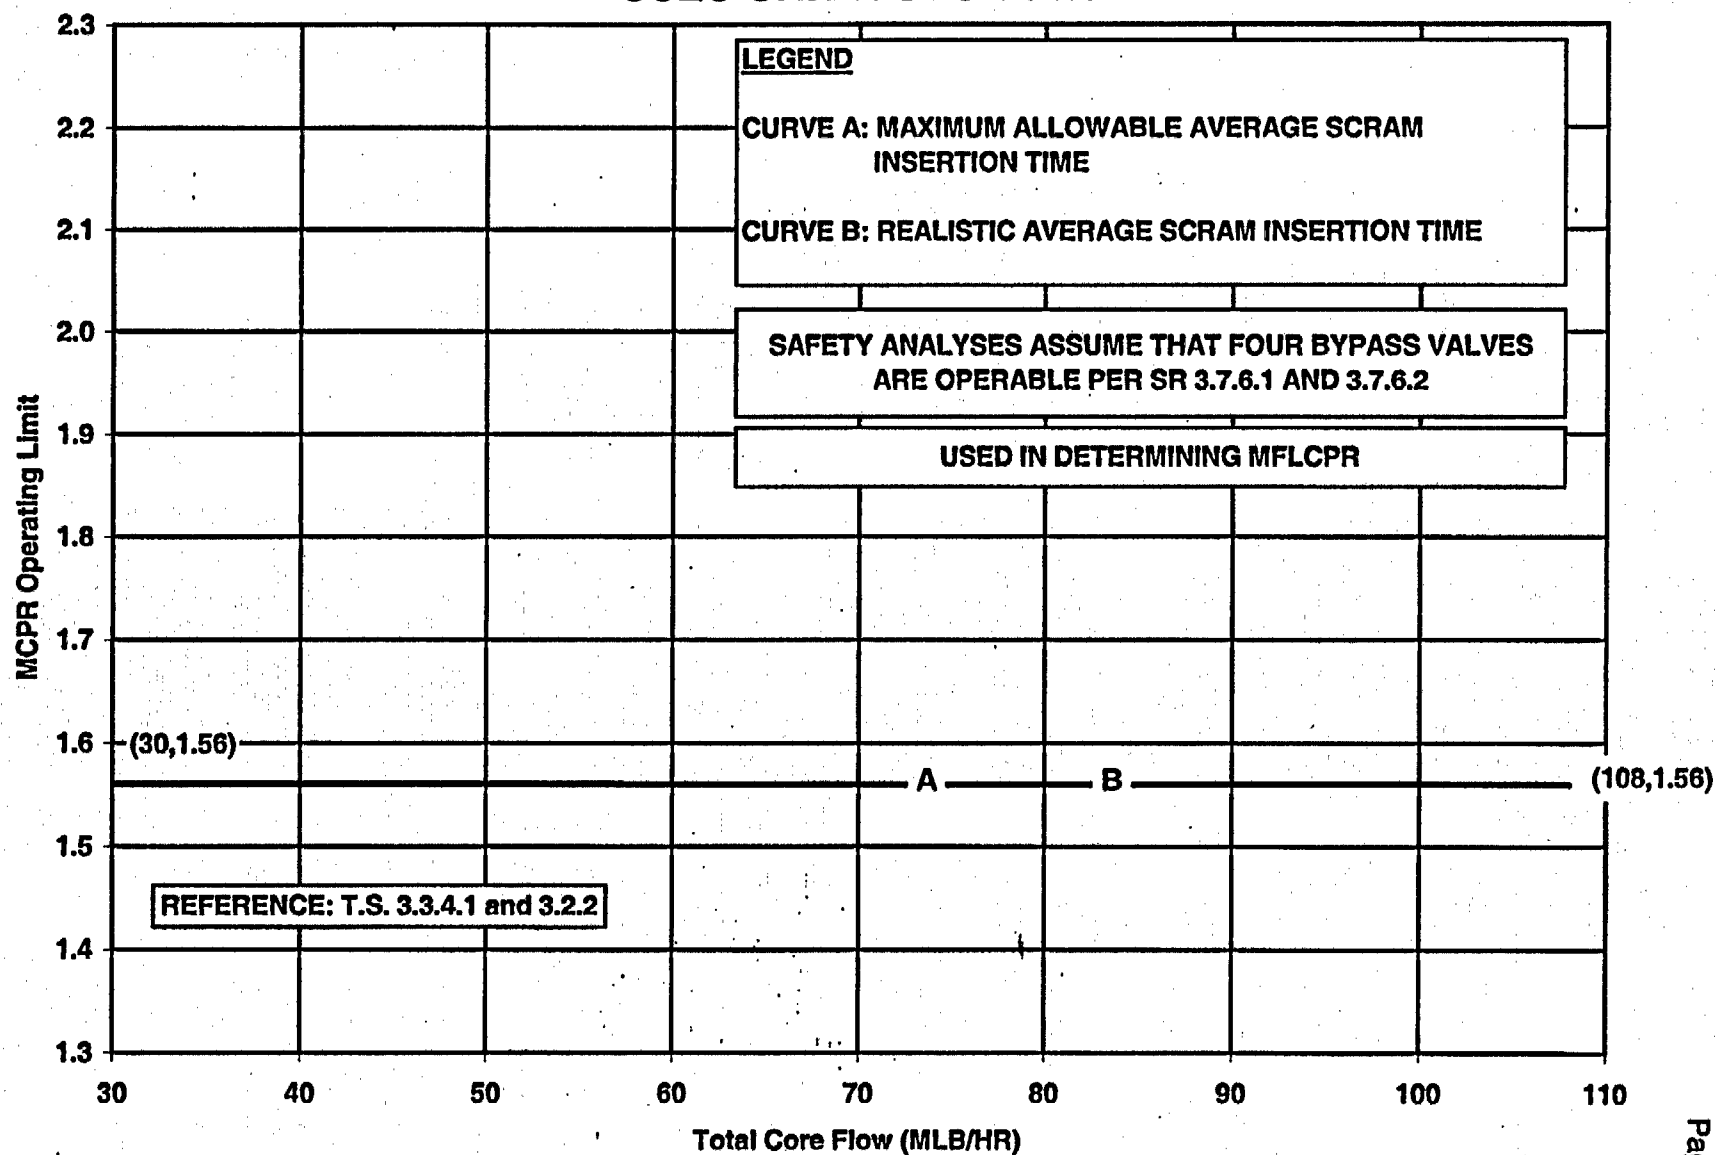

**MCPR OPERATING LIMIT VERSUS TOTAL CORE FLOW
EOC-RPT INOPERABLE / MAIN TURBINE BYPASS OPERABLE
TWO LOOP OPERATION (BOC TO EOC)
FIGURE 5.2-5**

SSES UNIT 2 CYCLE 12

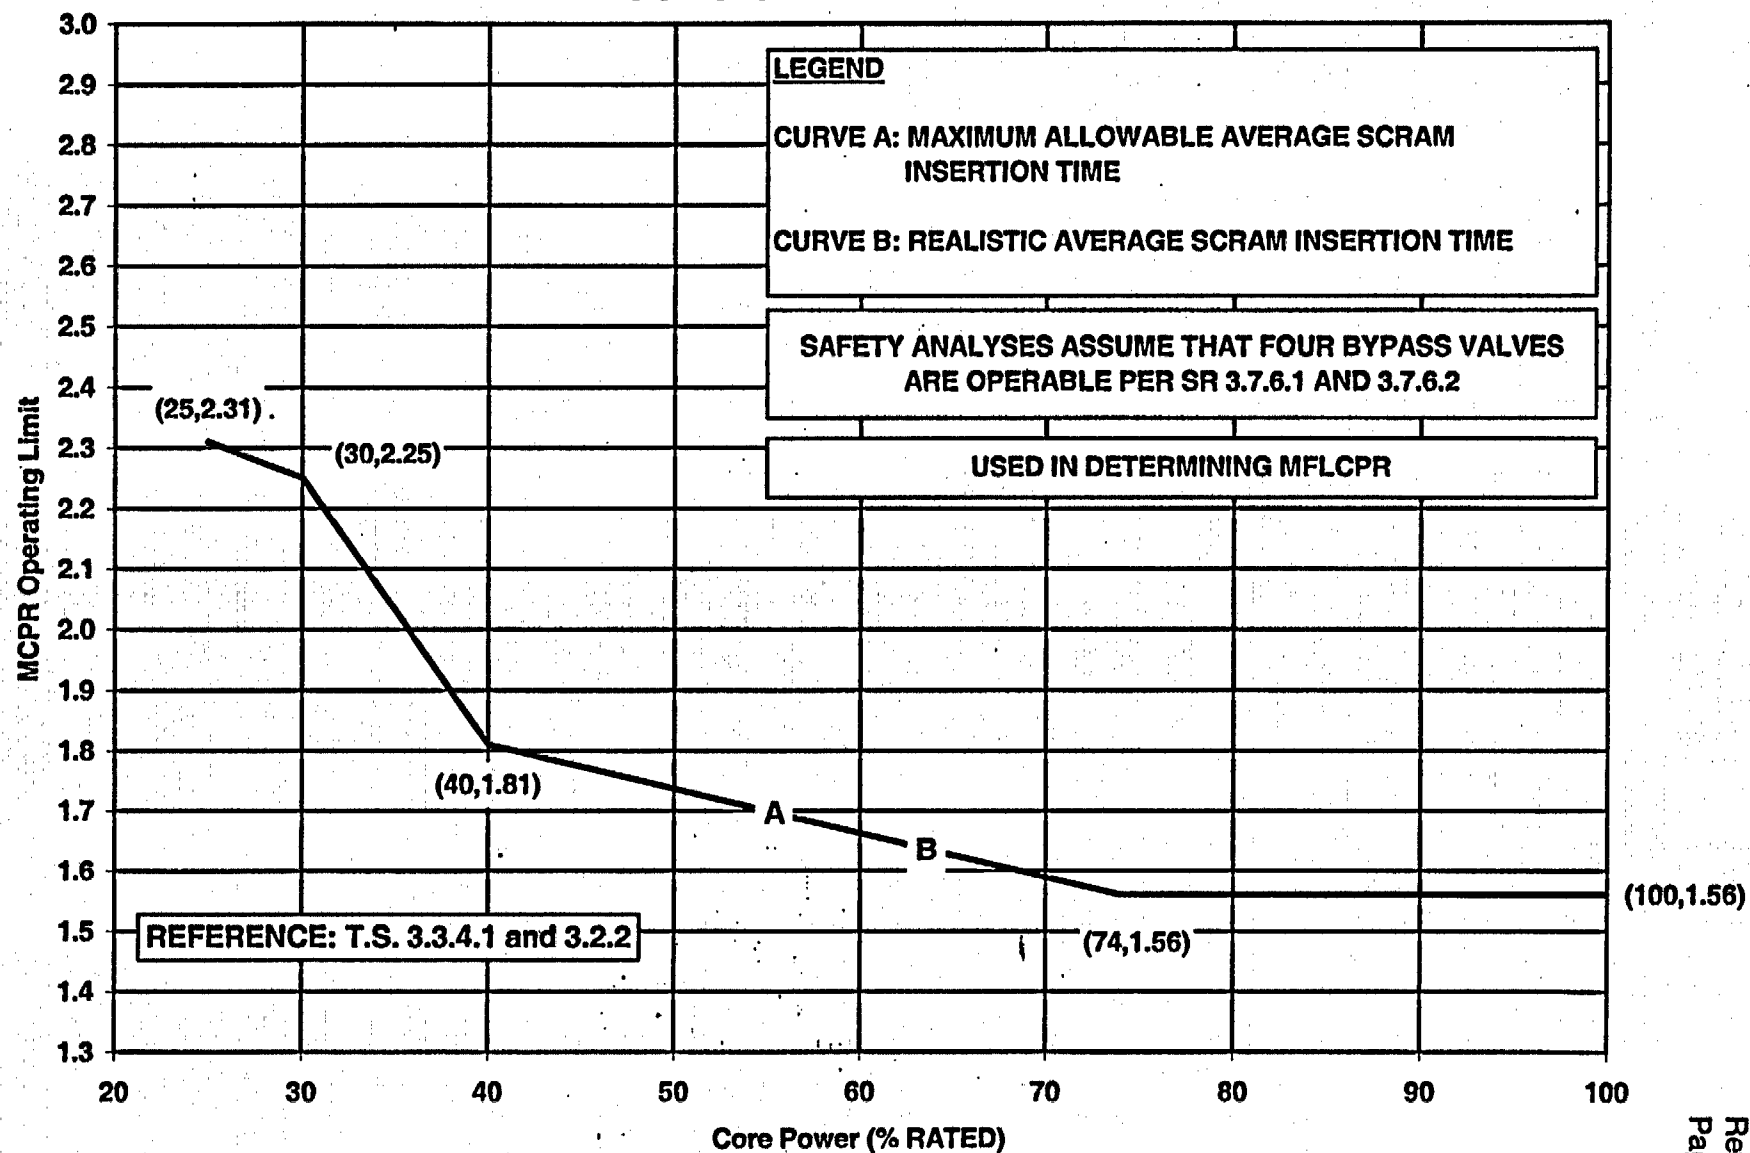

MCPR OPERATING LIMIT VERSUS CORE POWER
EOC-RPT INOPERABLE / MAIN TURBINE BYPASS OPERABLE
TWO LOOP OPERATION (BOC to EOC)
FIGURE 5.2-6

Table 5.3-1

**Average Scram Time Fraction Table For Use With Scram Time Dependent
MCPR Operating Limits**

Control Rod Position	Average Scram Time to Position (seconds)					
	0.470	0.480	0.490	0.500	0.510	0.520
45	0.470	0.480	0.490	0.500	0.510	0.520
39	0.630	0.676	0.722	0.768	0.814	0.860
25	1.500	1.582	1.664	1.746	1.828	1.910
5	2.700	2.848	2.996	3.144	3.292	3.440
Scram Time Fraction	0.000	0.200	0.400	0.600	0.800	1.000
Average Scram Insertion Time	Realistic					Maximum Allowable

6.0 LINEAR HEAT GENERATION RATE (LHGR)

6.1 Technical Specification Reference

Technical Specification 3.2.3 and 3.7.6

6.2 Description

The LHGR limits are specified below as a function of Main Turbine Bypass operability for each fuel type as follows:

Main Turbine Bypass Operable


The LHGR for ATRIUMTM-10 fuel shall not exceed the LHGR limit determined from Figure 6.2-1.

Main Turbine Bypass Inoperable

The LHGR for ATRIUMTM-10 fuel shall not exceed the LHGR limit determined from Figure 6.2-2.


The LHGR limits in Figures 6.2-1 and 6.2-2 are valid for Two Loop and Single Loop operation.

SSES UNIT 2 CYCLE 12

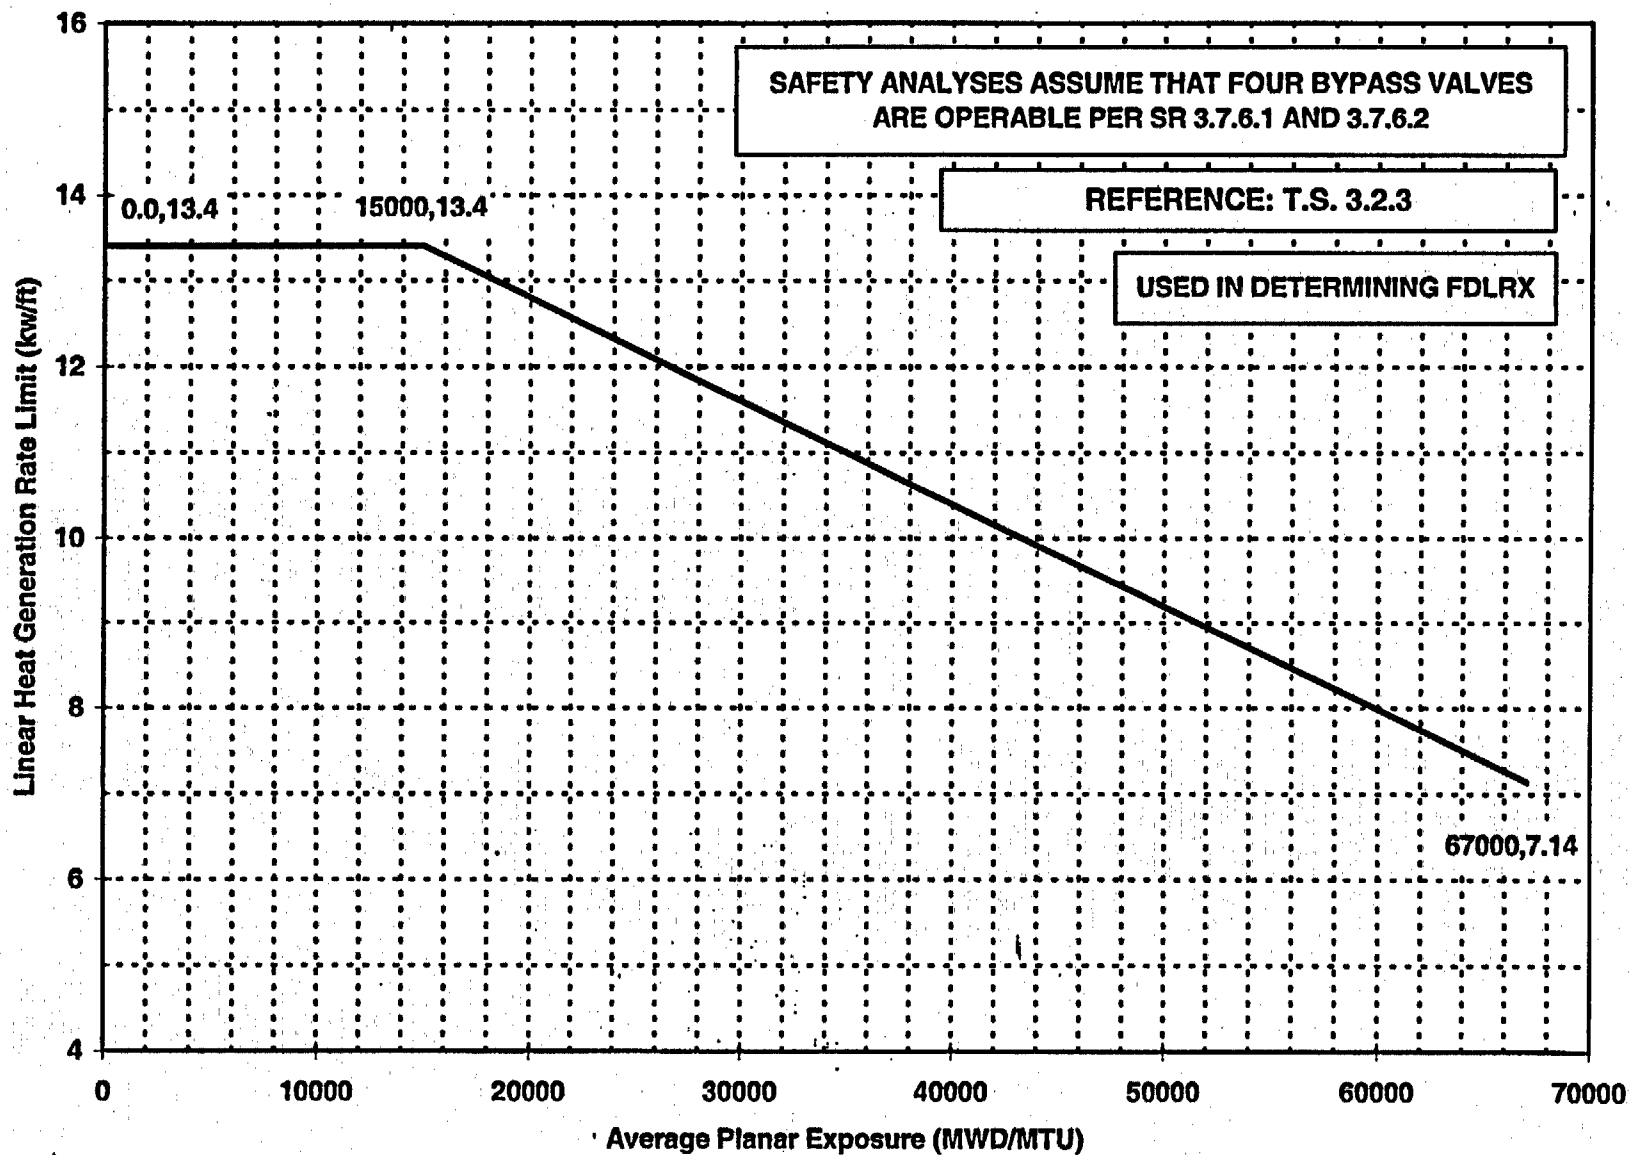

LINEAR HEAT GENERATION RATE LIMIT VERSUS AVERAGE PLANAR EXPOSURE
MAIN TURBINE BYPASS OPERABLE
ATRIUM™-10 FUEL
FIGURE 6.2-1

SSS UNIT 2 CYCLE 12

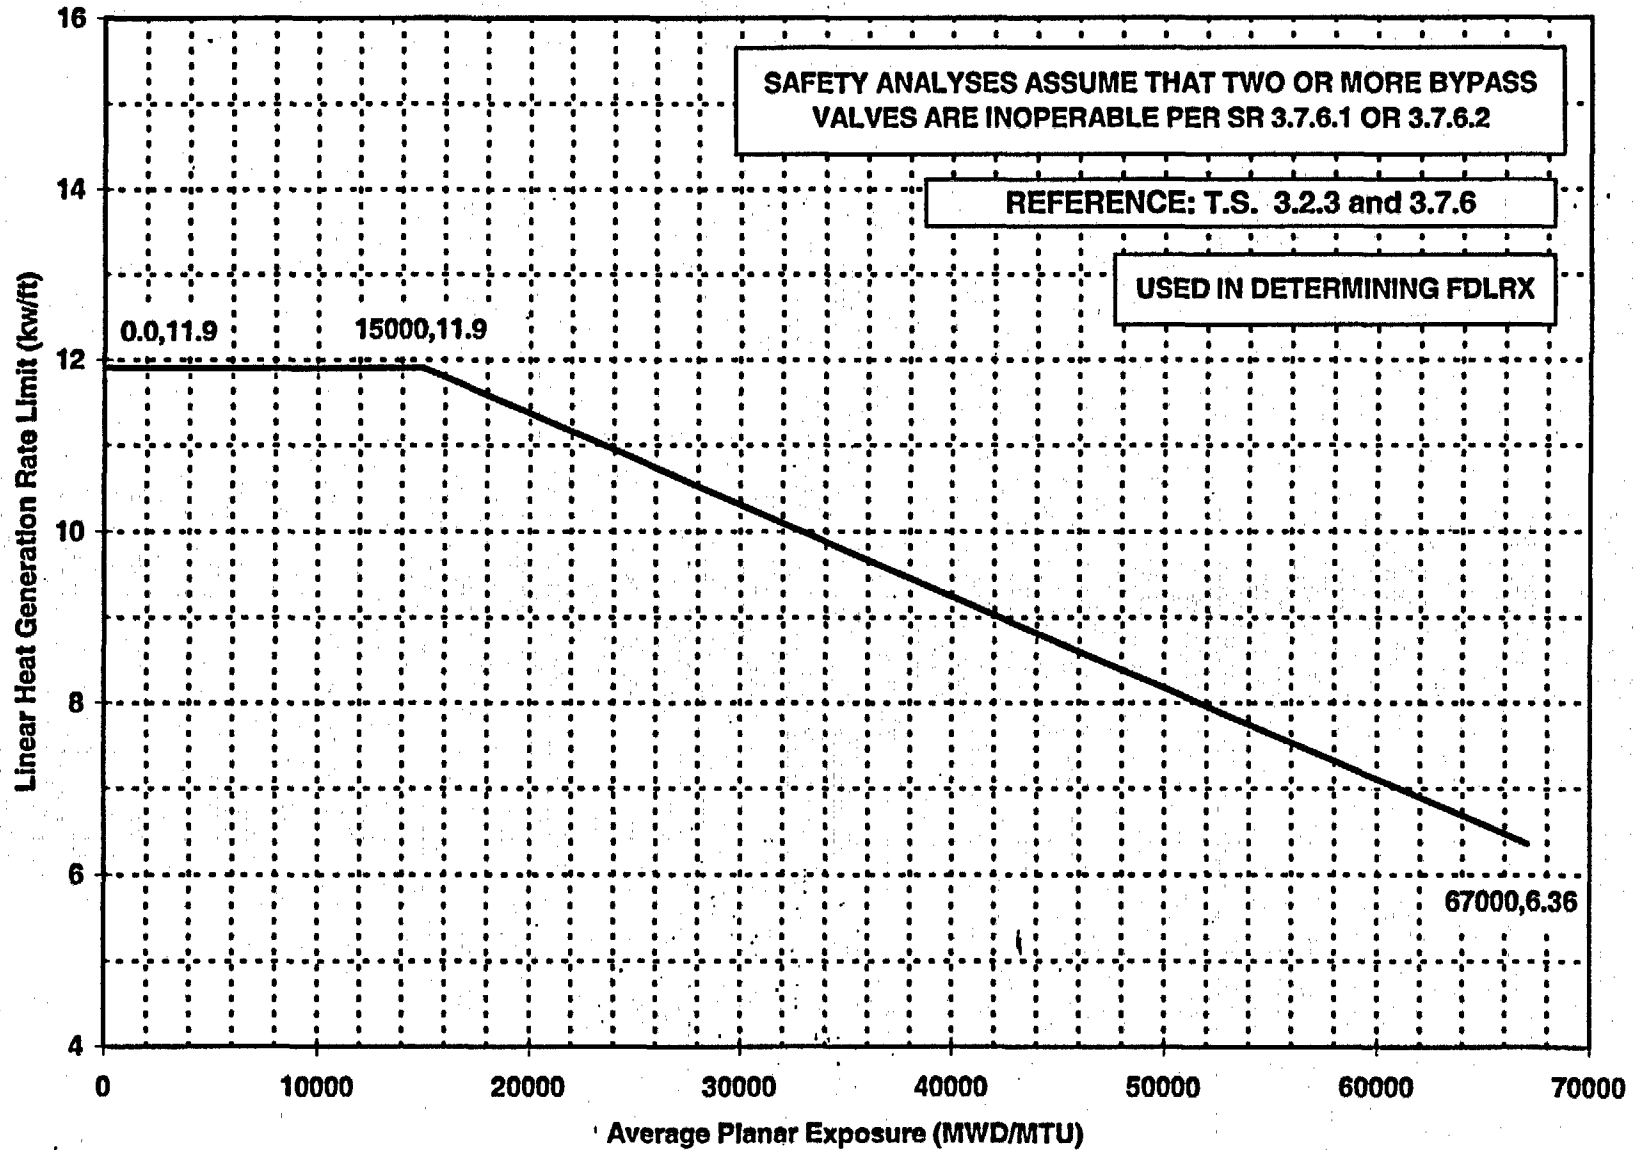

LINEAR HEAT GENERATION RATE LIMIT VERSUS AVERAGE PLANAR EXPOSURE
MAIN TURBINE BYPASS INOPERABLE
ATRIUM™-10 FUEL
FIGURE 6.2-2

7.0 AVERAGE POWER RANGE MONITOR (APRM) GAIN AND SETPOINTS

7.1 Technical Specification Reference

Technical Specification 3.2.4 and 3.3.1.1

7.2 Description

The APRM flow biased simulated thermal power-upscale scram trip setpoint (S) and flow biased neutron flux-upscale control rod block trip setpoint (S_{RB}) shall be established as specified in Table 7.2-1 and Table 7.2-2, including any adjustments per Technical Specification LCO 3.2.4.

Technical Specification LCO 3.2.4 provides an option to adjust the APRM setpoints when MFLPD is greater than FRACTION OF RATED THERMAL POWER (FRTP). The adjustment applies to both the APRM flow biased simulated thermal power-upscale scram trip setpoint and flow biased neutron flux-upscale control rod block trip setpoint for Two Loop and Single Loop operation. The APRM setpoints for Specification 3.2.4 are established in Tables 7.2-1 and 7.2-2.

Table 7.2-1
APRM Setpoint for
Two Loop Operation

Trip Setpoint	Allowable Value
$S \leq (0.58W + 59\%) T$	$S \leq (0.58W + 62\%) T^1$
$S_{RB} \leq (0.58W + 50\%) T$	$S_{RB} \leq (0.58W + 53\%) T$

Table 7.2-2
APRM Setpoint for
Single Loop Operation

Trip Setpoint	Allowable Value
$S \leq (0.58W + 54\%) T$	$S \leq (0.58W + 57\%) T^1$
$S_{RB} \leq (0.58W + 45\%) T$	$S_{RB} \leq (0.58W + 48\%) T$

where: S and S_{RB} are in percent of RATED THERMAL POWER

W = Loop recirculation flow as a percentage of the loop recirculation flow which produces a core flow of 100 million lbs/hr.

T = Lowest value of the ratio of FRTP divided by the MFLPD.² The FLPD is the actual LHGR divided by the applicable LHGR limit for APRM Setpoints. The LHGR limit for APRM setpoints for ATRIUM™-10 fuel shall be taken from Figure 7.2-1.


The LHGR for APRM setpoint limits in Figure 7.2-1 are valid for Main Turbine Bypass Operable and Inoperable and EOC-RPT Operable and Inoperable for both Two and Single Loop operation.

For calculated T-values greater than 1.0, a ratio of 1.0 is used in the above equations.

¹ APRM flow biased simulated thermal power-upscale scram allowable value in this table is equal to the value established in Technical Specification 3.3.1.1.

² For the calculation of T, the value of MFLPD shall be the maximum value of FDLRC.

SSES UNIT 2 CYCLE 12

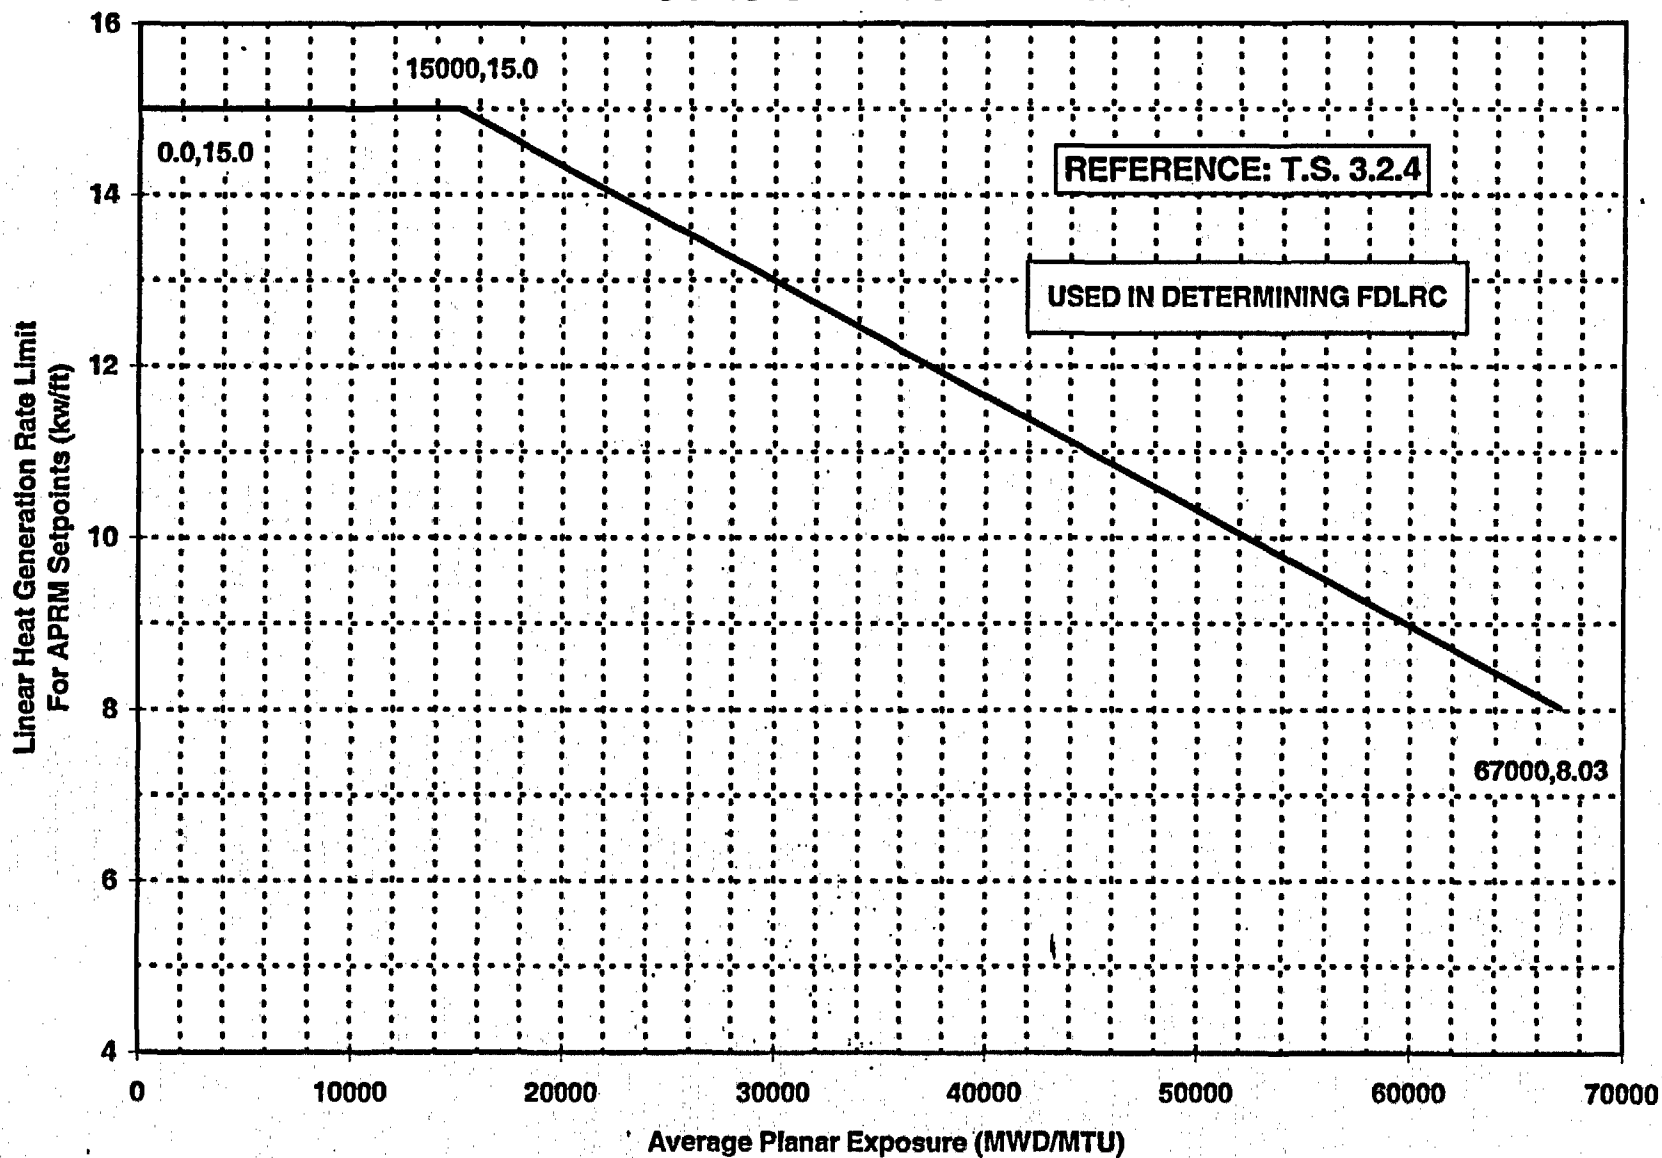

LINEAR HEAT GENERATION RATE LIMIT FOR APRM SETPOINTS VERSUS AVERAGE PLANAR EXPOSURE
ATRIUM™ -10 FUEL
FIGURE 7.2-1

8.0 RECIRCULATION LOOPS - SINGLE LOOP OPERATION

8.1 Technical Specification Reference

Technical Specification 3.2.1, 3.2.2, 3.2.3, 3.2.4, 3.3.4.1, 3.4.1, and 3.7.6

8.2 Description

APLHGR

The APLHGR limit for ATRIUM™-10 fuel shall be equal to the APLHGR Limit from Figure 8.2-1.

The APLHGR limits in Figure 8.2-1 are valid for Main Turbine Bypass Operable and Inoperable and EOC-RPT Operable and Inoperable in Single Loop operation.

Minimum Critical Power Ratio Limit

The MCPR limit is specified as a function of core power, core flow, and plant equipment operability status. The MCPR limit for all fuel types (ATRIUM™-10) shall be the greater of:

- a) Flow-Dependent MCPR value determined from Figure 8.2-2

OR

- b) The Power-Dependent MCPR value determined from one of the following figures, as appropriate:

Figure 8.2-3 : EOC-RPT and Main Turbine Bypass Operable from BOC to EOC

Figure 8.2-4 : Main Turbine Bypass Inoperable / EOC-RPT Operable from BOC to EOC

Figure 8.2-5 : EOC-RPT Inoperable / Main Turbine Bypass Operable from BOC to EOC

The MCPR limits in Figures 8.2-2 through 8.2-5 are valid only for Single Loop operation.


Linear Heat Generation Rate Limit

The LHGR limits for Single Loop Operation are defined in Section 6.0.

Average Power Range Monitor (APRM) Gain And Setpoints


APRM setpoints and the LHGR limit for APRM setpoints for Single Loop operation are defined in Section 7.0.

SSS UNIT 2 CYCLE 12

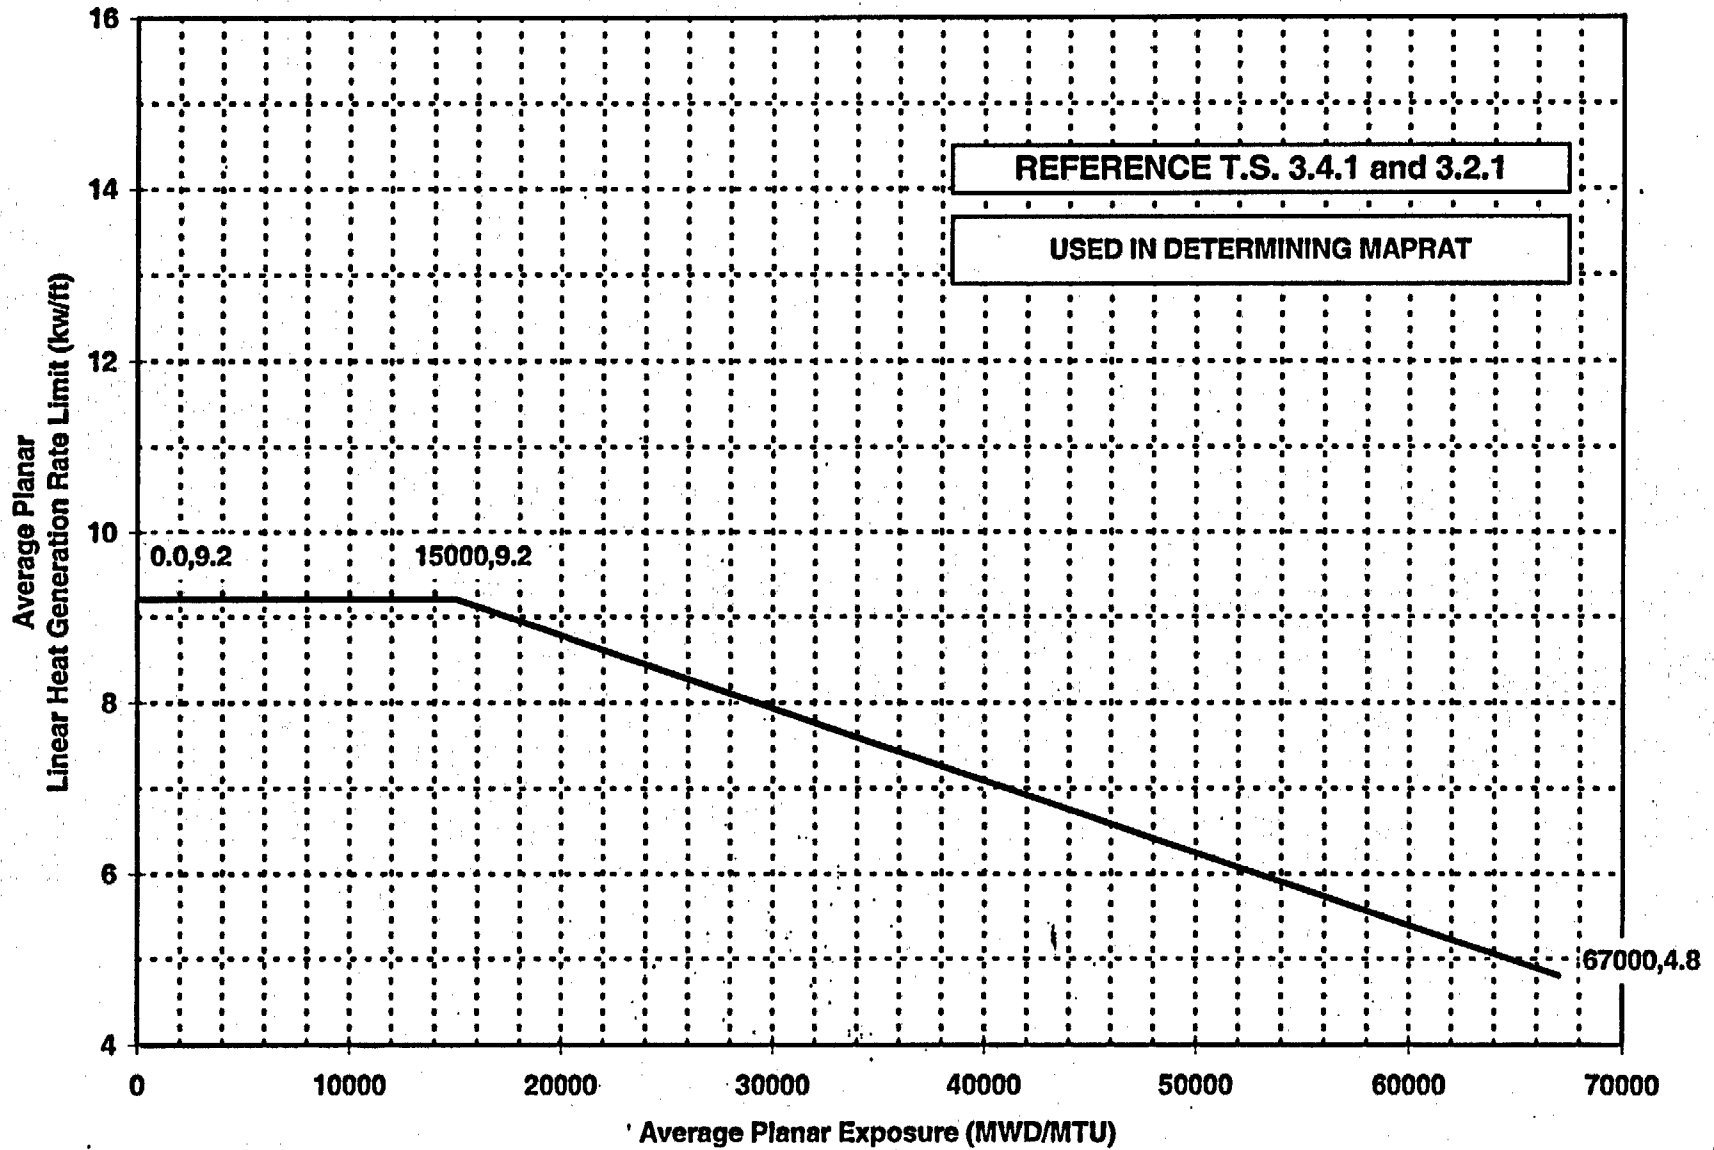


AVERAGE PLANAR LINEAR HEAT GENERATION RATE LIMIT VERSUS AVERAGE PLANAR EXPOSURE
 SINGLE LOOP OPERATION
 ATRIUM™-10 FUEL
 FIGURE 8.2-1

SSES UNIT 2 CYCLE 12

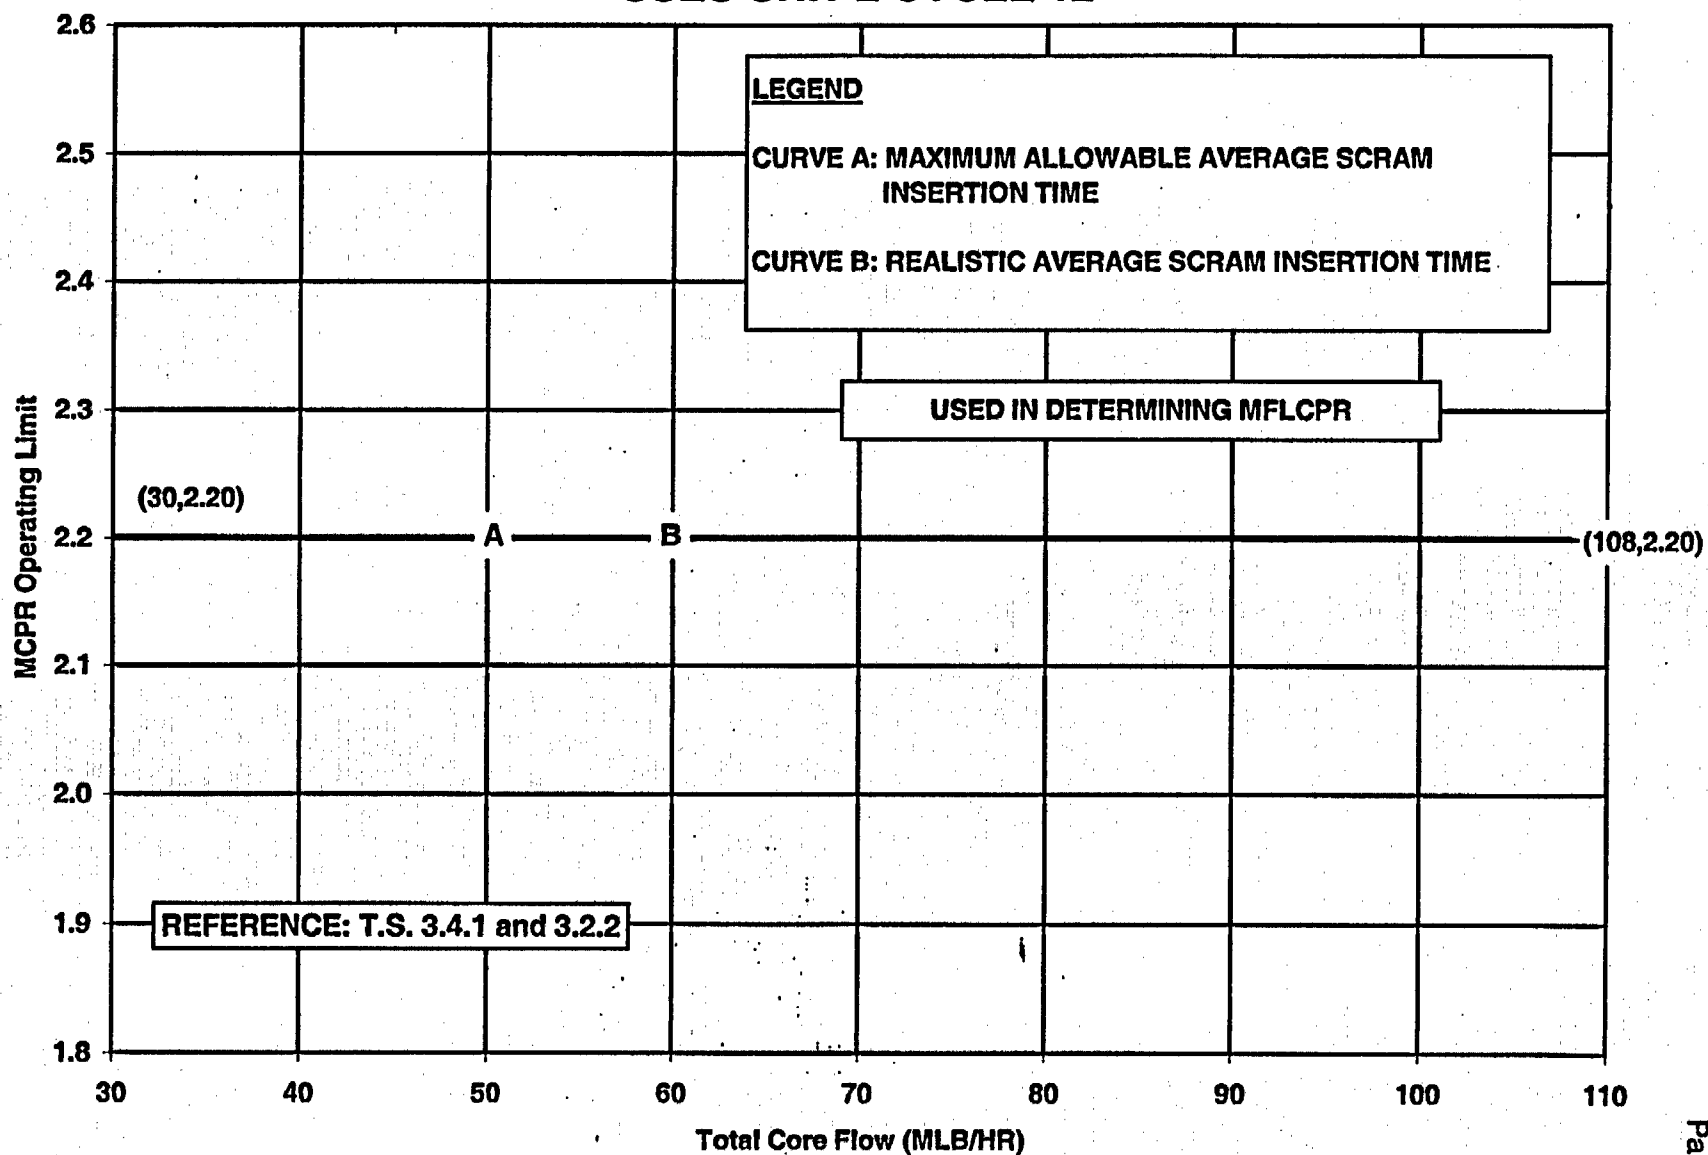


MCPR OPERATING LIMIT VERSUS TOTAL CORE FLOW
SINGLE LOOP OPERATION (BOC to EOC)
FIGURE 8.2-2

SSES UNIT 2 CYCLE 12

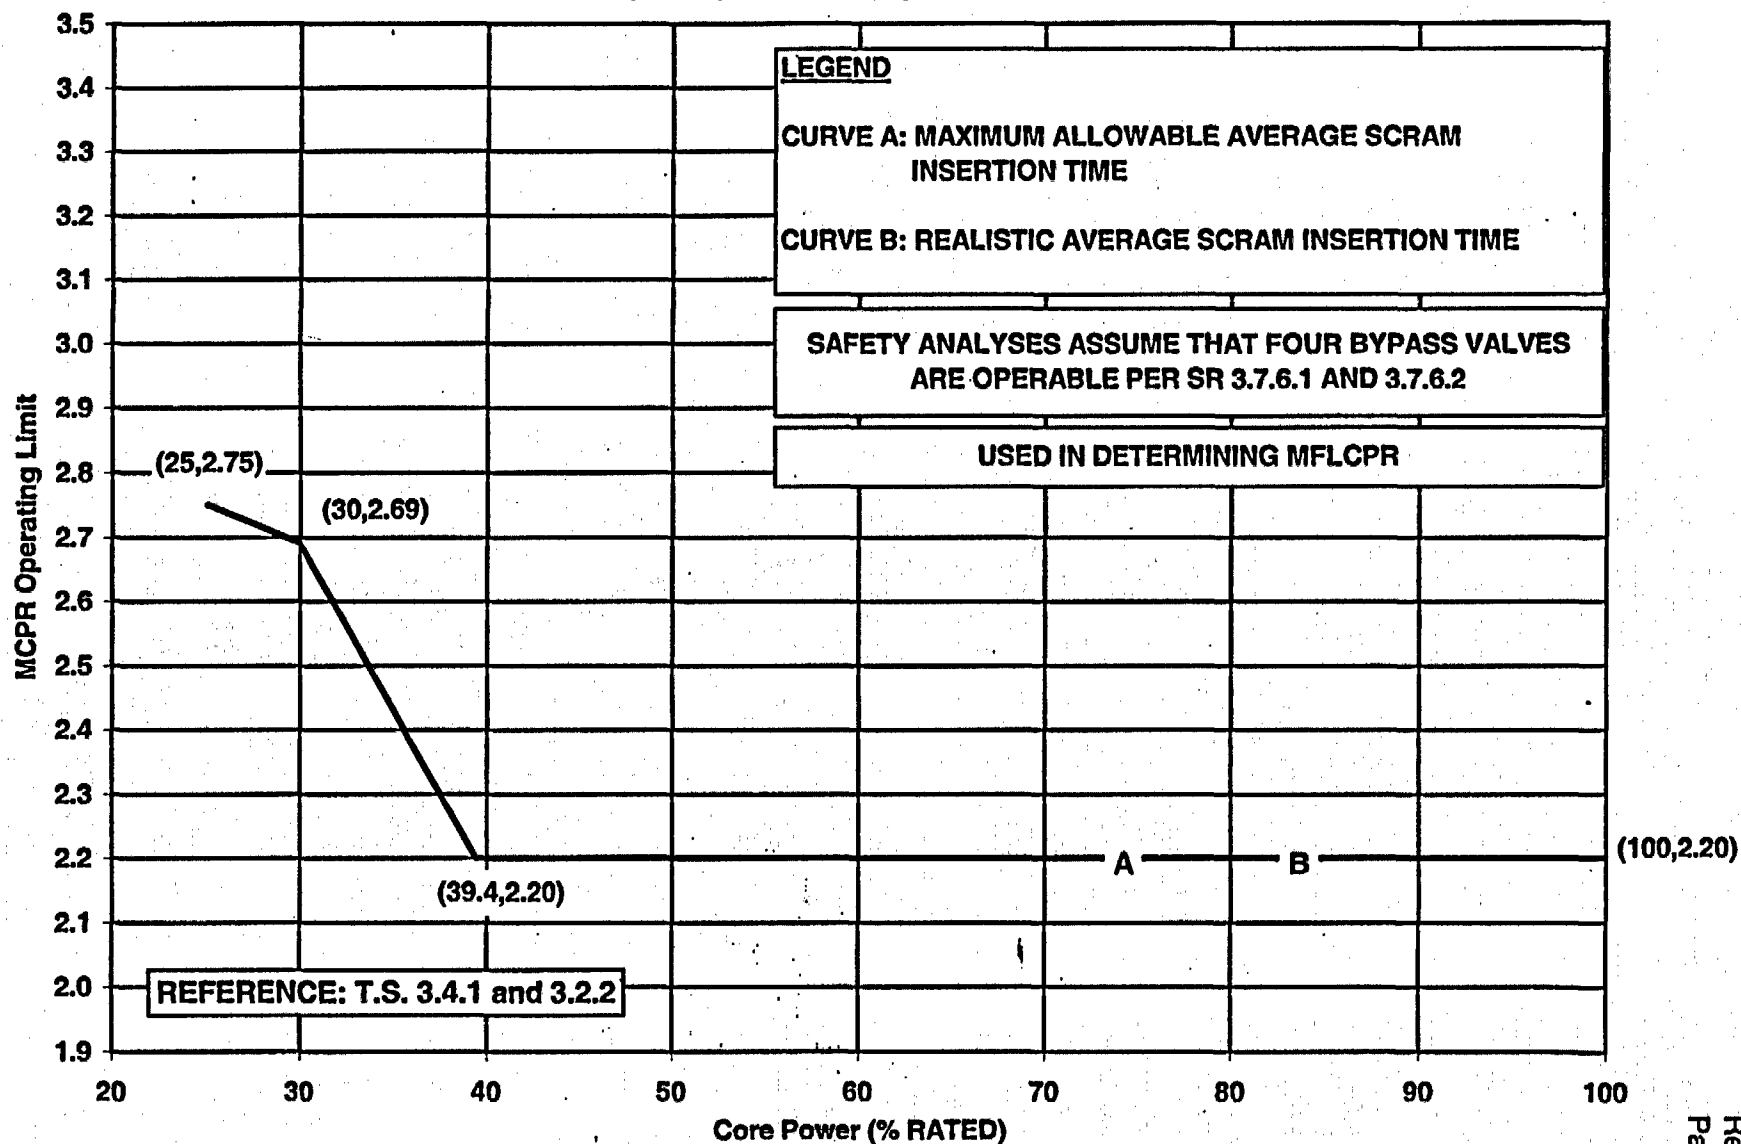


MCPR OPERATING LIMIT VERSUS CORE POWER
EOC-RPT AND MAIN TURBINE BYPASS OPERABLE
SINGLE LOOP OPERATION (BOC to EOC)
FIGURE 8.2-3

SSES UNIT 2 CYCLE 12

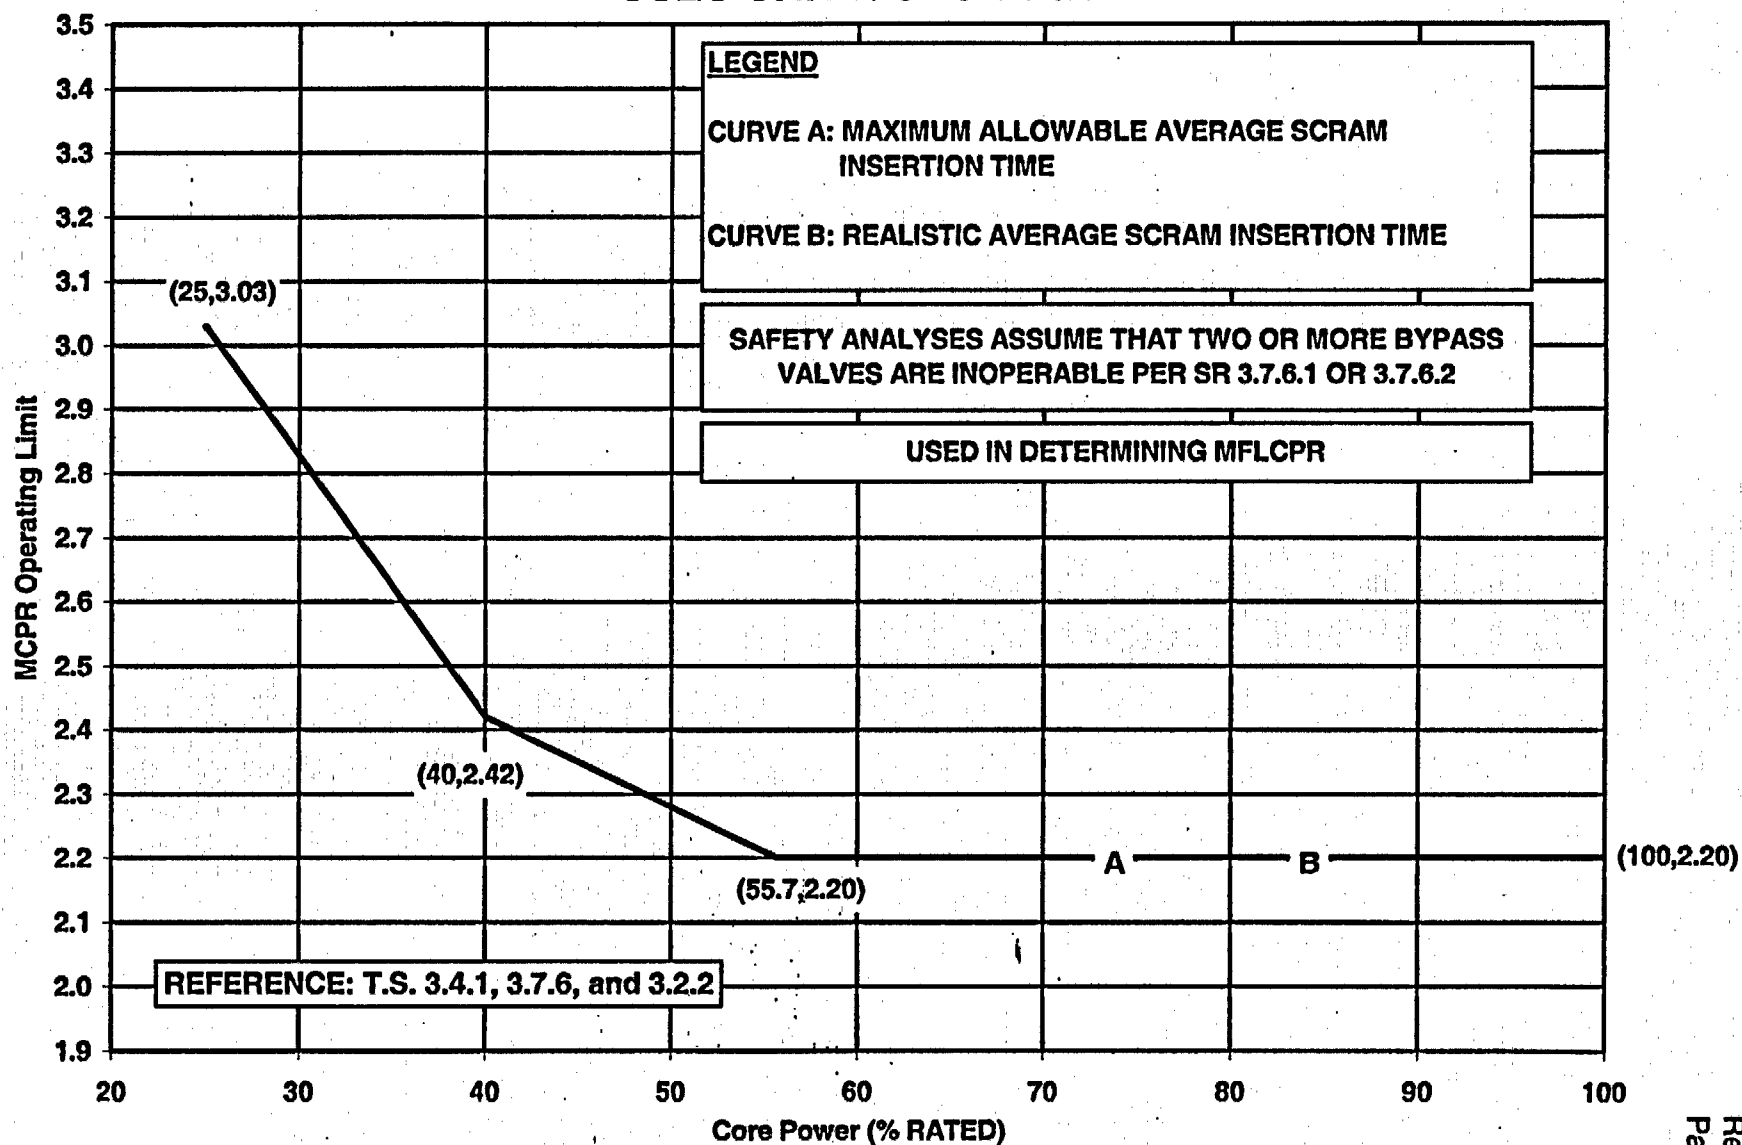

MCPR OPERATING LIMIT VERSUS CORE POWER
MAIN TURBINE BYPASS INOPERABLE / EOC-RPT OPERABLE
SINGLE LOOP OPERATION (BOC to EOC)
FIGURE 8.2-4

SSES UNIT 2 CYCLE 12

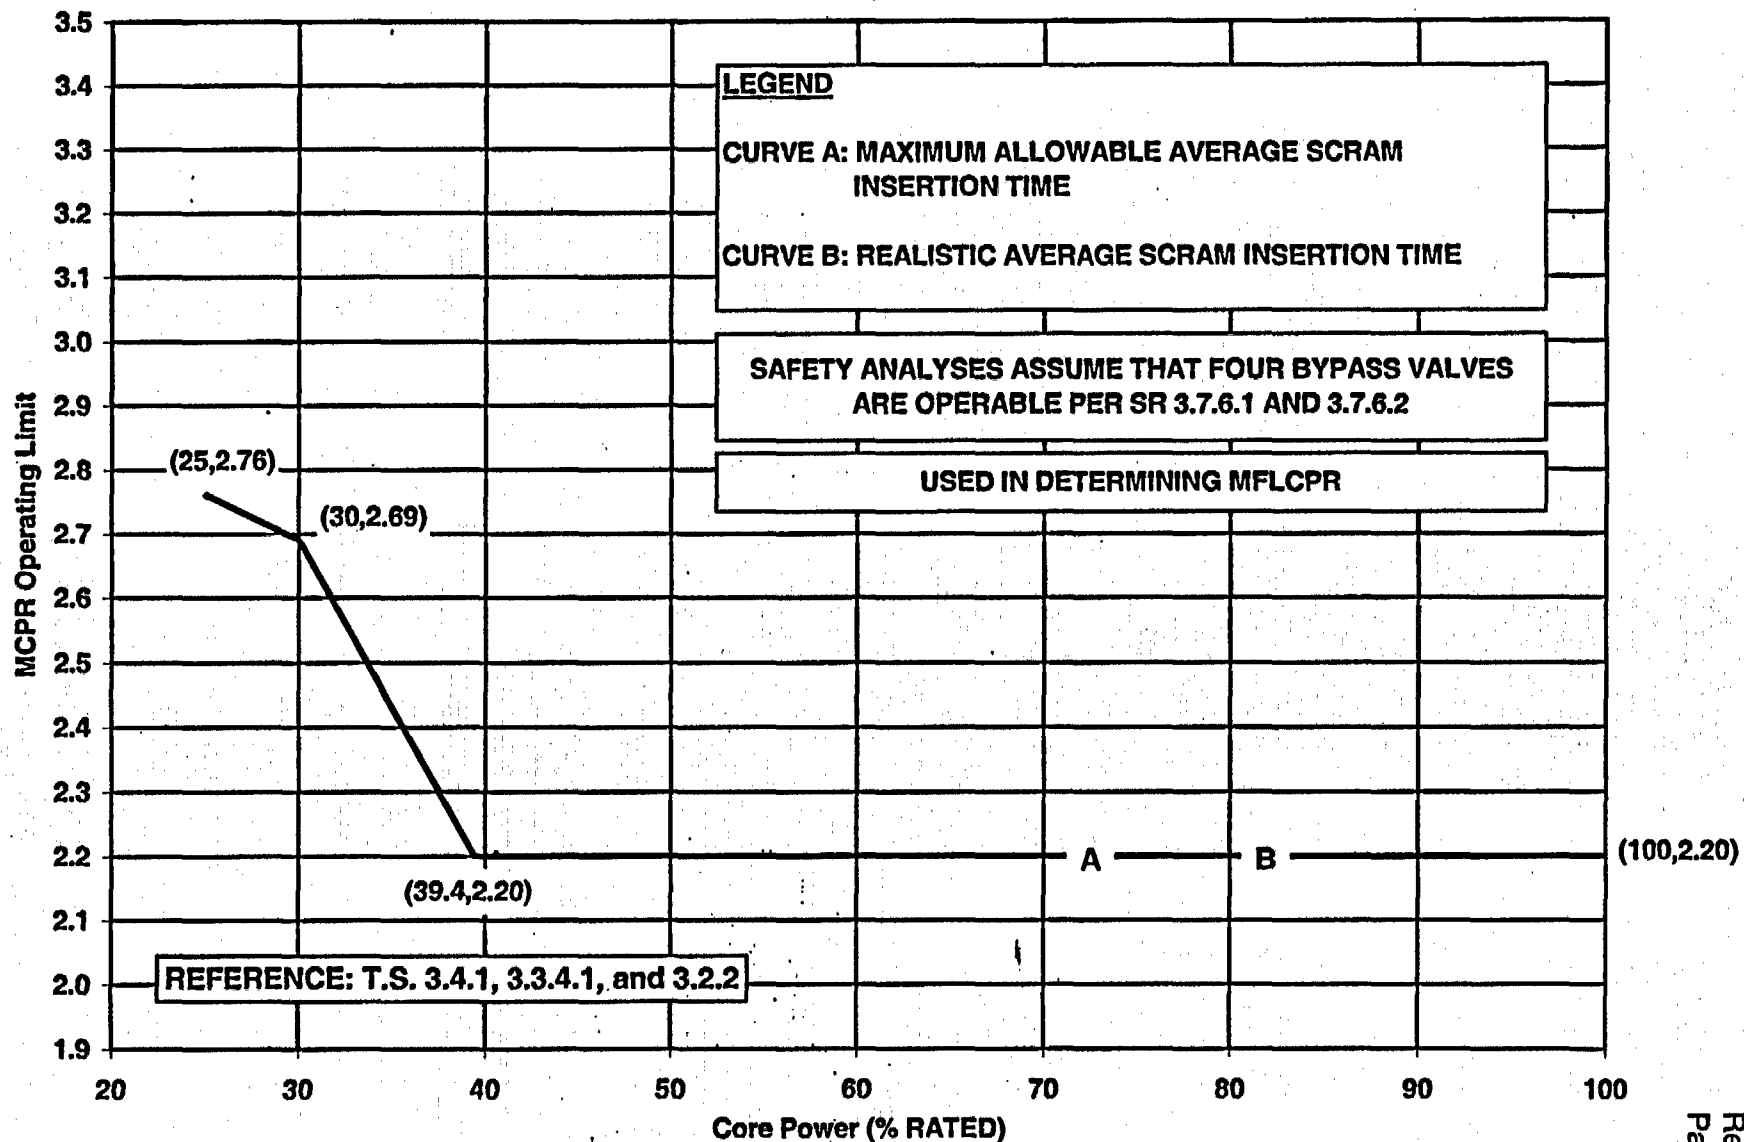

MCPR OPERATING LIMIT VERSUS CORE POWER
EOC-RPT INOPERABLE / MAIN TURBINE BYPASS OPERABLE
SINGLE LOOP OPERATION (BOC to EOC)
FIGURE 8.2-5

9.0 REFERENCES

- 9.1 The analytical methods used to determine the core operating limits shall be those previously reviewed and approved by the NRC, specifically those described in the following documents:
1. PL-NF-90-001-A, "Application of Reactor Analysis Methods for BWR Design and Analysis," July 1992.
 2. PL-NF-90-001, Supplement 1-A, "Application of Reactor Analysis Methods for BWR Design and Analysis: Loss of Feedwater Heating Changes and Use of RETRAN MOD 5.1," August 1995.
 3. PL-NF-90-001, Supplement 2-A, "Application of Reactor Analysis Methods for BWR Design and Analysis: CASMO-3G Code and ANFB Critical Power Correlation," July 1996.
 4. PL-NF-90-001, Supplement 3-A, "Application of Reactor Analysis Methods for BWR Design and Analysis: Application Enhancements," March 2001.
 5. XN-NF-80-19(A), Volume 1, and Volume 1 Supplements 1 and 2 (March 1983), and Volume 1 Supplement 3 (November 1990), "Exxon Nuclear Methodology for Boiling Water Reactors: Neutronic Methods for Design and Analysis," Exxon Nuclear Company, Inc.
 6. XN-NF-80-19(P)(A), Volumes 2, 2A, 2B, and 2C "Exxon Nuclear Methodology for Boiling Water Reactors: EXEM BWR ECCS Evaluation Model," September 1982.
 7. XN-NF-80-19(P)(A), Volume 3 Revision 2 "Exxon Nuclear Methodology for Boiling Water Reactors Thermex: Thermal Limits Methodology Summary Description," January 1987.
 8. XN-NF-80-19(P)(A), Volume 4, Revision 1, "Exxon Nuclear Methodology for Boiling Water Reactors: Application of the ENC Methodology to BWR Reloads," Exxon Nuclear Company, Inc. June 1986.
 9. XN-NF-85-67(P)(A), Revision 1, "Generic Mechanical Design for Exxon Nuclear Jet Pump BWR Reload Fuel," Exxon Nuclear Company, Inc., September 1986.
 10. ANF-524(P)(A), Revision 2 and Supplement 1, Revision 2, "Advanced Nuclear Fuels Corporation Critical Power Methodology for Boiling Water Reactors," November 1990.
 11. NE-092-001A, Revision 1, "Licensing Topical Report for Power Uprate With Increased Core Flow," Pennsylvania Power & Light Company, December 1992 and NRC SER (November 30, 1993).

12. ANF-89-98(P)(A) Revision 1 and Revision 1 Supplement 1, "Generic Mechanical Design Criteria for BWR Fuel Designs," Advanced Nuclear Fuels Corporation, May 1995.
13. ANF-91-048(P)(A), "Advanced Nuclear Fuels Corporation Methodology for Boiling Water Reactors EXEM BWR Evaluation Model," January 1993.
14. XN-NF-79-71(P)(A) Revision 2, Supplements 1, 2, and 3, "Exxon Nuclear Plant Transient Methodology for Boiling Water Reactors," March 1986.
15. EMF-1997(P)(A) Revision 0, "ANFB-10 Critical Power Correlation," July 1998, and EMF-1997(P)(A) Supplement 1 Revision 0, "ANFB-10 Critical Power Correlation : High Local Peaking Results," July 1998.
16. Caldon, Inc., "TOPICAL REPORT: Improving Thermal Power Accuracy and Plant Safety While Increasing Operating Power Level Using the LEFM™ System," Engineering Report - 80P, March 1997.
17. Caldon, Inc., "Supplement to Topical Report ER-80P: Basis for a Power Uprate with the LEFM™ or LEFM CheckPlus™ System," Revision 0, Engineering Report ER-160P, May 2000.
18. EMF-85-74(P)(A), "RODEX2A (BWR) Fuel Rod Thermal-Mechanical Evaluation Model," Revision 0, Supplements 1 and 2, February 1998.
19. EMF-2158(P)(A), Revision 0, "Siemens Power Corporation Methodology for Boiling Water Reactors: Evaluation and Validation of CASMO-4/Microburn-B2," Siemens Power Corporation, October 1999.