

## ACCELERATED DISTRIBUTION DEMONSTRATION SYSTEM

## REGULATORY INFORMATION DISTRIBUTION SYSTEM (RIDS)

ACCESSION NBR: 8906070196 DOC. DATE: 89/05/31 NOTARIZED: NO DOCKET #  
 FACIL: 50-244 Robert Emmet Ginna Nuclear Plant, Unit 1, Rochester G 05000244  
 AUTH. NAME AUTHOR AFFILIATION  
 MECREDY, R.C. Rochester Gas & Electric Corp.  
 RECIP. NAME RECIPIENT AFFILIATION  
 Document Control Branch (Document Control Desk)

SUBJECT: Forwards justification for continued operation re  
 pressurizer surge line stratification.

DISTRIBUTION CODE: A001D COPIES RECEIVED: LTR 1 ENCL 1 SIZE: 6  
 TITLE: OR Submittal: General Distribution

NOTES: License Exp date in accordance with 10CFR2,2.109(9/19/72). 05000244 S

	RECIPIENT ID CODE/NAME	COPIES		RECIPIENT ID CODE/NAME	COPIES		
		LTTR	ENCL		LTTR	ENCL	
	PD1-3 LA	1	1	PD1-3 PD	1	1	/
	JOHNSON, A	5	5				A
INTERNAL:	NRR/DEST/ADS 7E	1	1	NRR/DEST/CEB 8H	1	1	D
	NRR/DEST/ESB 8D	1	1	NRR/DEST/ICSB	1	1	D
	NRR/DEST/MTB 9H	1	1	NRR/DEST/RSB 8E	1	1	S
	NRR/DOEA/TSB 11	1	1	NUDOCS-ABSTRACT	1	1	
	<del>OG/LEMB</del>	1	0	OGC/HDS2	1	0	
	REG FILE 01	1	1	RES/DSIR/EIB	1	1	
EXTERNAL:	LPDR	1	1	NRC PDR	1	1	
	NSIC	1	1				

NOTE TO ALL "RIDS" RECIPIENTS:

PLEASE HELP US TO REDUCE WASTE! CONTACT THE DOCUMENT CONTROL DESK,  
 ROOM P1-37 (EXT. 20079) TO ELIMINATE YOUR NAME FROM DISTRIBUTION  
 LISTS FOR DOCUMENTS YOU DON'T NEED!

TOTAL NUMBER OF COPIES REQUIRED: LTTR 22 ENCL 20

m/1A-4  
 2/1/89



ROCHESTER GAS AND ELECTRIC CORPORATION • 89 EAST AVENUE, ROCHESTER, N.Y. 14649-0001

TELEPHONE  
AREA CODE 716 546-2700

May 31, 1989

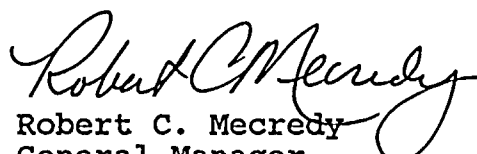
U.S. Nuclear Regulatory Commission  
Attn: Document Control Desk  
Washington, D.C. 20555

References: a. License No. DPR-18 (Docket No. 50-244)  
b. Justification for Continued Operation Regarding  
Pressurizer Surge Line Stratification

Gentlemen:

Attached is the Justification for Continued Operation regarding pressurizer surge line stratification which was referred to in the RG&E to NRC letter dated March 6, 1989, "Alternate Schedule for Evaluation of Pressurizer Surge Line Thermal Stratification".

Very truly yours,

  
Robert C. Mecredy  
General Manager  
Nuclear Production

RWE\042  
Attachments

xc: Allen R. Johnson (Mail Stop 14D1)  
Project Directorate I-3  
Washington, D.C. 20555

U.S. Nuclear Regulatory Commission  
Region I  
475 Allendale Road  
King of Prussia, PA 19406

Ginna Senior Resident Inspector

8906070196 890531  
PDR ADOCK 05000244  
P PDC

A001  
11

JUSTIFICATION FOR CONTINUED OPERATION  
REGARDING  
PRESSURIZER SURGE LINE STRATIFICATION

R.E. Ginna

Background

It was first reported in INPO SER 25-87 that temperature measurements at a German PWR indicated thermal transients different than design. Recent measurements at several domestic PWRs have indicated that the temperature difference between the pressurizer and the hot leg results in stratified flow in the surge line, with the top of the flow stream being hot (pressurizer temperature) and the bottom being colder (hot leg temperature). The top-to-bottom temperature difference can reach 250°F to 300°F in certain modes of operation, particularly Modes 3, 4, or 5 during heatup and cooldown.

Surge line stratification causes two effects:

- ♦ Global bending of the pipe is different than that predicted in the original design.
- ♦ Fatigue life of the piping could be reduced due to the global and local stresses from stratification and striping.

More recently, the NRC has issued Bulletin 88-11, "Pressurizer Surge Line Thermal Stratification", December 20, 1988, identifying actions to be taken by licensees.

- a) Conduct visual inspection - walkdown
- b) Update stress and fatigue analysis to account for stratification and striping
- c) Obtain monitoring data, as necessary.

The Bulletin encourages licensees to perform actions b) and c) above through collective efforts with other plants. In October 1988, Rochester Gas and Electric Corporation and other members of the Westinghouse Owners Group (WOG) authorized a program to perform a generic evaluation of surge line stratification in Westinghouse PWRs that will address portions of Bulletin 88-11.

The WOG program is designed to benefit from the experience gained in the performance of several plant specific analyses on Westinghouse PWR surge lines. These detailed analyses included definition of revised thermal transients (including stratification) and evaluations of pipe stress, fatigue usage factor, thermal striping, fatigue crack growth, leak-before-break, and support loads. The overall analytical approach used in all of these analyses has been consistent and has been reviewed, in detail, by the NRC staff.

As of March 1989, plant-specific analysis have been performed on five domestic Westinghouse PWRs. In addition, twelve Westinghouse plants have completed or are currently performing an interim evaluation of surge line stratification which includes finite element structural analysis of their specific configuration under stratified loading conditions.

### WOG Program Status

Surge line physical and operating data has been collected and summarized for all domestic Westinghouse PWRs (55 units). Information relating to piping layout, supports and restraints, components, size, material, operating history, etc., has been obtained. This data has been evaluated in conjunction with available monitoring data and plant-specific analyses performed by Westinghouse. Based on this evaluation, the WOG has developed several observations and conclusions, regarding the effects of thermal stratification at Westinghouse PWRs, which form the basis of the following justification for continued operation.

### JUSTIFICATION FOR CONTINUED OPERATION

#### A. Stratification Severity

Thermal stratification ( $\Delta T > 100^\circ\text{F}$ ) has been measured on all surge lines for which monitoring has been performed and which have been reviewed by the WOG to date (eight surge lines).

The amount of stratification measured and its variation with time (cycling) varies. This variation has been conservatively enveloped and applicability of these enveloping transients has been demonstrated for plant-specific analyses.

Various surge line design parameters were tabulated for each plant. From this, four parameters judged to be relatively significant were identified.

- A. Pipe inside diameter
- B. Piping slope (average)
- C. Entrance angle of hot leg nozzle
- D. Presence of mid-line vertical riser

These parameters were used in a grouping evaluation which resulted in the definition of 10 monitoring groups corresponding to various combinations of these parameters at Westinghouse PWRs. Approximately 40% of the plants fall into one group for which a large amount of monitoring data has already been received and for which the enveloping thermal transients, discussed above, are applicable. The remaining 60% of Westinghouse PWRs are divided among the other nine additional groups. Although monitoring data has not yet been received representative of all these groups, in general, the combination of significant parameters of these nine groups is expected to decrease the severity of stratification below that of the enveloping transients. This conclusion is also supported by a comparison of available monitoring data.

## **B. Structural Effects**

Significant parameters which can influence the structural effects of stratification are:

- a. Location and design of rigid supports and pipe whip restraints
- b. Pipe layout geometry and size
- c. Type and location of piping components

Although the material and fabrication techniques for Westinghouse surge lines are reasonably consistent and of high quality, the design parameters listed above vary among Westinghouse PWRs. This variation in design is primarily a result of plant-specific routing requirements.

A preliminary evaluation, comparing the ranges of these parameters to those of plants for which plant-specific analysis and interim evaluations are available (approximately 20% of Westinghouse PWRs) has been performed. This comparison indicates a high degree of confidence that, from a combined transient severity and structural effects standpoint, the worst configuration has most likely been evaluated. This conclusion is supported by plant-specific analyses covering five plants and interim evaluations of six additional plants (interim evaluation is in progress on six more plants as of March 1989). These analyses and evaluations have included various piping layouts, pipe sizes, support and restraint designs and piping components. Although the full range of variation in these parameters has not been evaluated, experience gained from these evaluations indicates that further evaluations will not result in a more limiting configuration than those already evaluated.

## **C. Operating Procedures**

The WOG currently has available the surveys of operating procedures performed in support of existing plant-specific analyses. Experience indicates that heatup and cooldown procedures have a significant effect on stratification in the surge line. All conclusions reached by the WOG to date have assumed a steam bubble mode heatup and cooldown procedure which may result in a temperature difference between the pressurizer and reactor coolant system (RCS) hot leg of more than 300°F. In many cases, individual plant Operating Procedures and Technical Specifications provide limits on this value. It is also known that some procedures utilize nitrogen, during at least part of the heatup/cooldown cycle, as a means of providing a pressure absorbing space in the pressurizer. Based on information currently available to the WOG, a high confidence exists that the steam bubble mode heatup, assumed to date, is conservative with respect to Westinghouse PWRs.

#### D. Remaining Life

All plant-specific analyses performed as of March 1989 have demonstrated compliance with applicable ASME Codes and a surge line fatigue life in excess of a 40 year plant life. Review of plant-specific fatigue calculations indicates that the surge line fatigue life is primarily dependent on the number of heatup and cooldown cycles, rather than years of operation.

Considering the worst case years of operation (28.5 years) in combination with the worst case number of heatup/cooldown cycles (75, at a different plant) at any Westinghouse PWR, and assuming a 40 year life for all surge lines, it is estimated that no more than approximately 50% of the fatigue life has been used at any Westinghouse plant to date.

For a design life considering 200 heatup/cooldown cycles (used in plant-specific analyses), this would indicate approximately 100 remaining cycles. This number of remaining cycles far exceeds the postulated worst case number for the two year time frame needed to resolve the stratification issue.

#### E. Leak-Before-Break

All the plant-specific analyses performed to date that have included the loadings due to stratification and striping have validated the "leak-before-break" concept and have substantiated a 40 year plant life. Fatigue crack growth calculations, performed as part of these plant-specific analyses, have demonstrated that any undiscovered crack as large as 10% of the wall thickness would not grow to cause leakage within a 40 year plant life. Nevertheless, any postulated through wall crack propagation would most likely result in "leak-before-break" and thus permit a safe and orderly shutdown.

#### F. Inspection History

The NDE inspection history at R.E. Ginna, as well as all other domestic Westinghouse designed PWRs, has not revealed any service induced degradation in the surge line piping that has been attributed to thermal stratification.

A visual examination of the pressurizer surge line, prior to the removal of the insulation was performed on March 22, 1989. The results of this inspection did not indicate any gross discernable distress or structural damage to the surge line.

Following the removal of the insulation, visual, surface and volumetric examinations were performed on each of the welds. A visual examination was performed on the one spring hanger. The pipe segments between the welds were visually examined as a part of the adjacent weld examination.

All of the welds and the spring hanger were determined to be acceptable and showed no evidence of any degradation attributable to thermal stratification.

### Summary of Conclusions from WOG Program

Based on information assembled on surge lines for all domestic Westinghouse PWRs, and evaluation of that information in conjunction with plant-specific and other interim evaluation results, the WOG concludes that:

- ♦ A high degree of confidence exists that further evaluation will confirm that the worst combination has already been evaluated for stratification severity, structural effects and operating procedures.
- ♦ All plant-specific analyses, to date, have demonstrated a 40 year life of the surge line. Assuming that further evaluation leads to the same conclusion for the remaining Westinghouse PWRs, the worst case remaining life is approximately 100 heatup/cooldown cycles.
- ♦ Through wall crack propagation is highly unlikely, however, "leak-before-break" would permit a safe and orderly shutdown if a through wall leak should develop.
- ♦ NDE inspection history demonstrates the present day integrity of Westinghouse PWR pressurizer surge lines.
- ♦ While additional monitoring, analyses, and surveys of operating procedures are expected to further substantiate the above conclusions, the presently available information on surge line stratification indicates that Westinghouse PWRs may be safely operated while additional data is obtained.

### Overall Conclusion

Based on the above discussions, Rochester Gas and Electric Corporation believes it is acceptable for R.E. Ginna to continue power operation for at least ten additional heatup/cooldown cycles. Rochester Gas and Electric Corporation has committed to address the requirements of Bulletin 88-11 by January 1991.