



**U.S. DEPARTMENT OF
ENERGY**

Office of
Nuclear Energy

Endorsement of ASME Section III Division 5 Rules for Construction of High Temperature Nuclear Reactors: Update on Industrial Perspective

NRC Public Stakeholders Meeting
December 14, 2017

William Corwin
Office of Advanced Reactor Technologies


December 14, 2017

NRC Public Stakeholders Meeting

(1)

ASME Section III Treats Metallic Materials for Low & High Temperatures Differently

- Allowable stresses for LWR & low-temperature advanced reactor components are not time dependent
- < 700°F (371°C) for ferritic steel and < 800°F (427°C) for austenitic mats

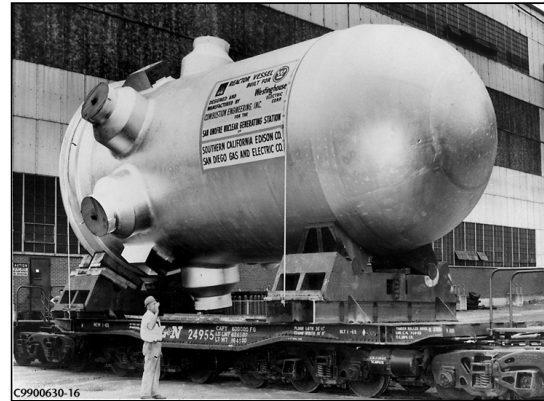

PWR
RPV



Monju
SFR
IHX

■ At higher temps, materials behave inelastically. Allowable stresses are explicit functions of time & temperature

- Must consider time-dependent phenomena such as creep, creep-fatigue, relaxation, etc.
- ASME Sec III Division 5 provides rules for construction of high temperature reactor components

ASME Sec III Div 5 Contains Construction & Design Rules for High-Temperature Reactors

- **Includes gas, liquid metal & molten salt-cooled reactors**
- **First Issued in Nov 2011, revised in 2013, 2015 & 2017**
- **Covers high-temperature metallic components explicitly**
- **Includes rules for graphite & ceramic composites for core supports & internals for first time in any international design code**
- **Covers low temperature metallic components, largely by reference to other portions of Sec III**

Discussions Regarding Endorsement of ASME Section III Division 5 Began in 2015

- **Following multiple DOE-NRC Non-LWR Advanced Reactor Workshops and ASME meetings since 2015, ASME Task Groups have been formed to define potential pathways and schedules for NRC endorsement of Div 5**
 - **Metallic structures & components**
 - **Non-metallic support structures**
- **DOE-NE supports ASME task groups & related technical basis development to reduce technical risk and support private sector deployment of new advanced reactors**
- **NRC/NRO is actively participating in task groups, but has requested industrial input regarding value/prioritization**

DOE Contacted Three Industry Technical Working Groups Regarding Div 5

- **TWGs are focused on high temperature gas cooled, fast, and molten salt cooled reactors (HTGRs, FRs & MSR)**
- **Input requested on value of endorsement of Div 5 for design of advanced reactors and reduction of their anticipated risk for licensing and deployment**
- **Support for endorsement of Div 5 has been received from all TWGs**
 - **Positive verbal feedback provided by Chairs of all TWGs with expectations of supporting letters soon**
 - **Supporting letter from HTGR TWG sent to Chair of ASME Section III, copies to NRC/NRO, 11/13/17**

ASME Will Summarize and Reinforce Industrial Support Requests to NRC/NRO

- **When all industry requests have been received by ASME, the Chairs of Section III and the Board of Nuclear Codes and Standards will send joint request to NRC/NRO underscoring the value of and need for endorsement of Division 5**
- **Existing ASME Task Groups will continue to work towards pathways and schedules for endorsement**
- **DOE-NE will support R&D activities agreed upon with ASME Committees and BNCS to provide continued technical basis development to optimize the existing Division 5 (2017 edition)**

High Priority ASME Code Actions Are Endorsed by BNCS and Supported by DOE R&D Activities

Topics	2019 Edition	Beyond 2019
New simplified analysis methods (EPP) that replace current methods based on linear analysis (and can be used at higher temperatures) for all Class A materials	X	
Adequacy of the definition of S values used for the design of Class B components, which is based on extrapolated properties at 100,000 hours, in light of application to 500,000 hours design	X	
Construction rules for “compact” heat exchanges		X
Incorporation of new materials such as Alloy 617 and Alloy 709 (austenitic stainless)	A617	A709
Pursuit of “all temperature code”		X
Complete the extension of Class A materials for 500,000 hr-design	304H, 316H	Grade 91, 2½Cr-1Mo, Alloy 800H
Develop design by analysis rules for Class B components (including compact HX)		X
Add non-irradiated and irradiated graphite material properties		X
Develop rules for clad components for molten salt reactor applications		X

Industry Is Expressing that Endorsement of ASME Sec III Div 5 Is Valuable

- **Requests for input on Div 5 endorsement from broad range of advanced reactor vendors and suppliers is evoking positive responses**
- **ASME Section III and BNCS are also very supportive of Div 5 endorsement**
- **DOE-NE is supporting and coordinating industry and ASME support for endorsement with active R&D activities to optimize the Division 5**
- **Endorsement of Div 5 is anticipated to reduce technical risk and support private sector deployment of new advanced reactors**