



L'Autorité de sûreté nucléaire

| Présentation | Domaines | Textes | Régions | International | Publications | Actualité |



Publications

Annual report "nuclear safety in France in 2000"



Accueil



La revue Contrôle



Les dossiers de Contrôle



La sûreté nucléaire et la radioprotection en France



3614 Magnuc



Les fiches d'information du public



Publications pour les professionnels



Autres publications

Téléchargez la version anglaise du rapport annuel 2000 au format pdf (9338 Ko).
(Si vous n'avez pas Acrobat Reader, vous pouvez le télécharger en cliquant sur le logo ci-dessous.)



Forewords (4 pages / 55 Ko)



Main technical topics in 2000 (21 pages / 606 Ko)



Chapter 1 - Nuclear Safety (6 pages / 177 Ko)



Chapitre 2 - Organization of nuclear safety supervision (21 pages / 295 Ko)



Chapitre 3 - BIN Regulatory provisions (15 pages / 357 Ko)



Chapitre 4 - Plant Supervision (13 pages / 194 Ko)



Chapitre 5 - Information of the public (17 pages / 530 Ko)



Chapitre 6 - International relations (15 pages / 357 Ko)



Chapitre 7 - Emergency response (14 pages / 218 Ko)



Chapitre 8 - Radiation protection (10 pages / 191 Ko)



Chapitre 9 - Radioactive material transportation (21 pages / 897 Ko)



Chapitre 10 - Radioactive waste (24 pages / 640 Ko)



Chapitre 11 - Pressurized water reactors (76 pages / 1025 Ko)



Chapitre 12 - Research reactors, laboratories and other installations (23 pages / 804 Ko)



Chapitre 13 - Nuclear fuel cycle installations (27 pages / 967 Ko)



Chapitre 14 - Final shutdown and dismantling of nuclear installations (17 pages / 553 Ko)



Annexe1- Organization chart of the Nuclear Safety Authority (2 pages / 108 Ko)




Annexe2- List of Basic Nuclear Installations (10 pages / 199 Ko)



Annexe3 - Acronyms and abbreviations (6 pages / 84 Ko)

The fuel cycle

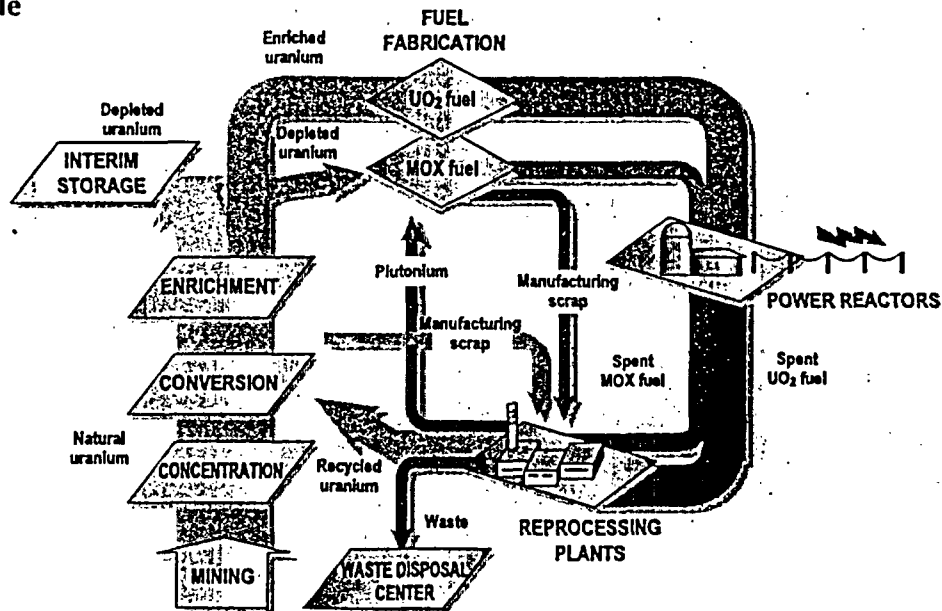

Manufacture of the fuel and its subsequent reprocessing after it has passed through the nuclear reactors constitute the fuel cycle. The cycle begins with the extraction of uranium ore and ends with storage of a variety of radioactive wastes originating from the irradiated fuel or from the industrial operations involved utilizing radioactive materials.

The uranium ore is mined, purified and concentrated into yellow-cake on the mining site. The installations involved use natural uranium, where the uranium 235 content is about 0.7%. They are not subject to BNI regulations.

Most of the world's reactors use uranium which is slightly enriched with uranium 235. For example, the PWR series requires uranium enriched to between 3 and 4%. Prior to enrichment, the solid yellow-cake is converted into uranium hexafluoride gas during the conversion operation. This is done in the Comurhex facilities in Malvési (Aude department) and Pierrelatte (Drôme department).

In the Eurodif plant at Tricastin, the uranium hexafluoride is separated into two streams using a gaseous diffusion process, one relatively rich in uranium 235 and the other depleted.

The enriched uranium hexafluoride is then converted into uranium oxide to allow manufacture of fuel assemblies in the FBFC plants at Romans-sur-Isère. The assemblies are then placed in the reactor core where they release power by fission of the uranium 235 nuclei.

After about three years, the spent fuel is removed from the reactor and cooled in a pit, first of all on the plant site and then in the COGEMA reprocessing plant at La Hague.

In this plant, the uranium and plutonium from the spent fuels are separated from the fission products and the other actinides. The uranium and plutonium are packaged for interim storage before subsequent reuse. The radioactive waste is placed in a surface repository if low level, or in interim storage pending an appropriate disposal solution.

The plutonium produced by reprocessing can be used to make fuel for fast neutron reactors in the ATPu at Cadarache, or MOX fuel (uranium and plutonium mixed oxide), used in French 900 MWe PWRs, in the ATPu shop or in the Marcoule MELOX plant.

The vast majority of the plants in the cycle belong to the COGEMA group. It should however be noted that the uranium-based fuel manufacturing plants are operated by FBFC, a 100% subsidiary of Framatome.

Fuel cycle industry provisional throughputs in 2000

Facility	Material processed	Product obtained
Comurhex (Pierrelatte)	uranyl nitrate (reprocessed uranium)	UF ₆ : 0 ton UF ₆ : 0 ton U ₃ O ₈ : 112 tons
COGEMA (Pierrelatte) TUS shop W plant	uranyl nitrate (reprocessed uranium) UF ₆ (depleted uranium) U ₃ O ₈ in interim storage	U ₃ O ₈ : 1,203 tons U ₃ O ₈ : 14,389 tons U ₃ O ₈ : 114,196 tons
Eurodif (Pierrelatte)	UF ₆ (natural uranium) 18,421.4 tons	UF ₆ (depleted uranium) 17,105.8 tons UF ₆ (enriched uranium) 2,082.7 tons
FBFC (Romans)	UF ₆ (enriched uranium) 1,093.9 tons UF ₆ (enriched reprocessed uranium) 9.8 tons	UO ₂ (fuel elements): 641.4 tons UO ₂ (URE fuel elements): 22.9 tons
ATPu (Cadarache)	UO ₂ (depleted uranium): 50 tons PuO ₂ : 2.7 tons	MOX (fuel rods): 45.7 tons Fuel for Phenix: 10.38 tons
MELOX (Marcoule)	UO ₂ (depleted uranium): 115.6 tons PuO ₂ : 8 tons	MOX (fuel elements): 109.5 tons
COGEMA (La Hague)	Spent fuel elements Quantities processed: UP3: 387.2 tons UP2 800: 810.3 tons UP2 400: 0 ton Spent fuel elements off-loaded to the spent fuel pits: 1,164 tons	Vitrified waste packages produced: UP3: 341 containers UP2 800: 482 containers PuO ₂ : 12 tons Uranyl nitrate: 1,240 tons

1 MAIN TOPICS COMMON TO ALL INSTALLATIONS

1.1

Fuel cycle consistency

With a view to upgrading the performances of reactors in service, EDF implements new fuel management systems, requiring prior DSIN authorization.

EDF, as overall acting principal, must be fully aware of fuel cycle technical and administrative constraints in order to deal effectively with the related forward planning: processing of materials involved, fuel fabrication, reactor fueling, material transportation, spent fuel removal, delivery and interim storage, possible reprocessing, effluent release, waste management, etc.