



Department of Energy
Office of Legacy Management

OCT 3 1 2005

Mr. Gary Janosko, Chief
U.S. Nuclear Regulatory Commission
Fuel Cycle Facilities Branch
Division of Fuel Cycle Safety and Safeguards
Mail Stop T-8A33
Washington, DC 20555-0001

Subject: Transmittal of the Revised *Long-Term Surveillance Plan for the U.S. Department of Energy Uranium Mill Tailings Disposal Site at Canonsburg, Pennsylvania*, and the *Evaluation of Water Quality and Regulatory Compliance at the Canonsburg, Pennsylvania, Disposal Site*

Dear Mr. Janosko:

The U.S. Department of Energy (DOE) Office of Legacy Management hereby submits four copies of the revised *Long-Term Surveillance Plan (LTSP) for the U.S. Department of Energy Uranium Mill Tailings Disposal Site at Canonsburg, Pennsylvania*, for review and concurrence by the U.S. Nuclear Regulatory Commission (NRC). Also enclosed is *Evaluation of Water Quality and Regulatory Compliance at the Canonsburg, Pennsylvania, Disposal Site*, which provides the technical basis for maintaining the water monitoring program proposed in the LTSP.

DOE incorporated the following changes into the revised LTSP:

1. DOE revised the ground and surface water monitoring program specification to incorporate monitoring requirements specified in the *Ground Water Compliance Action Plan (GCAP) for the Canonsburg, Pennsylvania, UMTRA Project Site* (February 2000). DOE retained most of the initial best management practice monitoring program (deleting only upgradient well 0410 and surface water monitoring locations 0601 and 0603) because uranium concentrations in site ground water remain above background levels. DOE also retained monitoring locations on Area C, as requested by the Commission in the April 28, 2003, letter to DOE concurring in deletion of ground water use restrictions for Area C.
2. DOE revised text describing ground water conditions to incorporate the monitoring results since the initial LTSP was approved in 1995.
3. The revised LTSP describes how the Commission concurred in the DOE request to delete institutional controls on ground water use in Area C and appended the concurrence letter and Technical Evaluation Report to the LTSP.

4. DOE appended Area C deed restrictions. These will be imposed and recorded when the Commonwealth of Pennsylvania finalizes the sale of Area C to a private entity. Inspection procedures were revised to include deed restriction (institutional controls) monitoring.
5. DOE appended the NRC concurrences in compliance with 40 CFR 192 Subparts A and B and the associated Technical Evaluation Reports.
6. DOE addressed changes in site conditions since the previous LTSP was approved in 1995, including loss of erosion control marker ECM-4A in 1994 and stream bank erosion and repair in 2001 and 2005.
7. DOE updated the list of monitor wells to reflect decommissioning of unneeded wells in 2002.
8. DOE removed the material describing interagency coordination with the U.S. Army Corps of Engineers (USACE) to stabilize the Chartiers Creek bank. The USACE flood control project was not constructed upstream of the railroad bridge near Area C.
9. DOE revised other portions of the LTSP so it is consistent with 10 CFR 40.27 and other LTSPs. For example, the revised LTSP addresses annual and follow-up inspections, instead of Phase I and Phase II inspections as defined in the 1995 plan.

The enclosed evaluation report of water quality information for the past 10 years shows that concentrations of uranium in ground water in two of the point of compliance (POC) wells have been variable, with levels decreasing from 1997 through 2001, and then increasing for the past 3 years. Elevated and variable concentrations of uranium in ground water are expected at the POC wells, which are downgradient from the disposal cell, because the cell was designed to allow transient drainage over time. Uranium levels are currently above the EPA maximum concentration limit (MCL) of 0.044 milligrams per liter (mg/L), but significantly below the alternate concentration limit of 1.0 mg/L. Computer modeling predicts that uranium concentrations in ground water will decrease over the next 25 years, as explained in the GCAP. There is currently no unacceptable risk to human health and the environment because there is no exposure to or use of ground water at the site. Also, there is no indication of site-related contamination in surface water in adjacent Chartiers Creek.

Because of the generally decreasing but variable uranium concentrations in ground water, DOE proposes that environmental monitoring continue on an annual basis at five monitor wells and one surface water location for the next 5 years, analyzing samples only for uranium. At the end of this period, the monitoring program will be reassessed and modified as applicable. This conclusion is reflected in the revised LTSP.


Mr. Gary Janosko

-3-

OCT 31 2005

Please call me at (304) 285-4991 or e-mail me at rstaubly@gjo.doe.gov if you have questions about site conditions or the revised LTSP.

Sincerely,

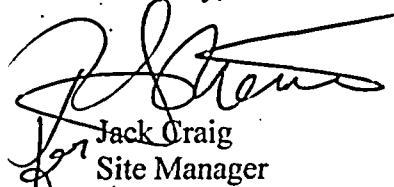

for Jack Craig
Site Manager

Enclosure

cc w/o enclosure:

L. McGee, LM-50

R. Plienness, LM-50

C. Carpenter, Stoller

M. Widdop, Stoller

cc w/enclosure

Project. File CAN 505.15 (D. Roberts)

Staubly\CAN Letter - LTSP Revision to NRC.doc



Long-Term Surveillance Plan for the U.S. Department of Energy Canonsburg Uranium Mill Tailings Disposal Site, Canonsburg, Pennsylvania

September 2005



U.S. Department
of Energy

Office of Legacy Management

Work Performed Under DOE Contract No. DE-AC01-02GJ79491
for the U.S. Department of Energy Office of Legacy Management.
Approved for public release; distribution is unlimited.

Office of Legacy Management

**Long-Term Surveillance Plan
for the
U.S. Department of Energy
Canonsburg Uranium Mill Tailings Disposal Site
Canonsburg, Pennsylvania**

September 2005

(Supersedes DOE/AL/62350-203, Revision 0, October 1995)

Work Performed by S.M. Stoller Corporation under DOE Contract No. DE-AC01-02GJ79491
for the U.S. Department of Energy Office of Legacy Management, Grand Junction, Colorado

Disclaimer

The information in this plan represents the most current and best understanding of technical and regulatory issues and responsibilities regarding the Canonsburg Disposal Site. Additional Site data continue to be obtained, and negotiations with regulators and stakeholders continue. This document will be revised as necessary to reflect changes based on newly obtained information.

Contents

Acronyms and Abbreviations	vi
1.0 Introduction	1-1
1.1 Purpose	1-1
1.2 Legal and Regulatory Requirements	1-1
1.3 Role of the U.S. Department of Energy	1-2
2.0 Final Site Conditions	2-1
2.1 Site History	2-1
2.2 Area Description	2-1
2.3 Site Description	2-3
2.3.1 Legal Description	2-3
2.3.2 Location	2-3
2.3.3 Site Description	2-3
2.3.4 Institutional Controls	2-8
2.3.5 Specific Site Surveillance Features	2-10
2.4 Ground Water and Surface Water	2-13
2.4.1 Geology	2-13
2.4.2 Ground Water	2-13
2.4.3 Surface Water	2-13
2.4.4 Water Quality	2-15
3.0 Long-Term Surveillance Program	3-1
3.1 General License for Long-Term Custody	3-1
3.2 Requirements of the General License	3-1
3.3 Annual Site Inspection	3-1
3.3.1 Frequency of Inspection	3-1
3.3.2 Inspection Procedure	3-2
3.3.3 Inspection Checklist and Map	3-2
3.3.4 Personnel	3-4
3.3.5 Annual Inspection Report	3-4
3.4 Follow-Up Inspections	3-4
3.4.1 Criteria for Follow-Up Inspections	3-4
3.4.2 Personnel	3-5
3.4.3 Reports	3-5
3.5 Site Maintenance	3-5
3.5.1 Routine Maintenance	3-6
3.5.2 Bank of Chartiers Creek	3-7
3.6 Intervention or Emergency Response	3-8
3.6.1 Criteria for Emergency Response	3-10
3.6.2 Notification	3-10
3.6.3 Procedure for Intervention or Emergency Response	3-11
3.7 Environmental Monitoring	3-11
3.7.1 Water Quality Monitoring Under the Original Long-Term Surveillance Plan	3-11
3.7.2 Water Quality Monitoring Under the Ground Water Compliance Action Plan	3-13
3.7.3 Revised Comprehensive Sitewide Water Quality Monitoring Program	3-13
3.7.4 Reports of Water Quality Monitoring	3-14

3.8	Institutional Controls Monitoring	3-14
3.9	Records	3-15
3.10	Quality Assurance.....	3-15
3.11	Health and Safety	3-15
4.0	References	4-1

Figures

Figure 2-1.	Location Map of the Canonsburg, Pennsylvania, Disposal Site	2-2
Figure 2-2.	Canonsburg, Pennsylvania, Disposal Site	2-5
Figure 2-3.	Cross Section of the Canonsburg, Pennsylvania, Disposal Site	2-7
Figure 2-4.	Cross-Section Through Buried Riprap Wall, Canonsburg, Pennsylvania, Disposal Site.....	2-9
Figure 2-5.	Potentiometric Surface, Monitor Wells, and Surface Water Sampling Locations, Canonsburg Disposal Site	2-14
Figure 2-6.	Uranium Concentration Trends in Ground Water at the Canonsburg, Pennsylvania, Disposal Site, 1995-2002.....	2-17
Figure 3-1.	Canonsburg, Pennsylvania, Disposal Site, Inspection Transects	3-3
Figure 3-2.	Location of Thorium-230 Anomalies, Area C, Canonsburg, Pennsylvania, Disposal Site.....	3-9
Figure B-1.	Real Estate Tract Map for Canonsburg Disposal Site	B-8

Tables

Table 1-1.	Requirements for the Long-Term Surveillance Plan and the Long-Term Surveillance and Maintenance of the Canonsburg, Pennsylvania, Disposal Site	1-1
Table 2-1.	Location of Monuments, Markers, and Monitor Wells, at the Canonsburg, Pennsylvania Disposal Site.....	2-11
Table 2-2.	Reference Standards for Ground Water and Surface Water Monitoring at the Canonsburg Disposal Site	2-15
Table 3-1.	Requirements of the General License and DOE Implementation.....	3-1
Table 3-2.	Transects Used During Inspection of the Canonsburg, Pennsylvania, Disposal Site	3-2
Table 3-3.	Criteria for Emergency Response	3-10
Table 3-4.	Ground Water and Surface Water Sampling Locations at the Canonsburg, Pennsylvania, Disposal Site	3-12
Table 3-5.	Analytes For Surface Water and Ground Water at the Canonsburg, Pennsylvania, Disposal Site	3-13
Table B-1.	Real Property Acquisitions, Canonsburg Disposal Site.....	B-3

Appendixes

Appendix A	Regulator Concurrence Documentation
Appendix B	Real Estate Documentation
Appendix C	Inspection Checklist

Acronyms and Abbreviations

ACL	alternate concentration limit
AEC	U.S. Atomic Energy Commission
BM	boundary monument(s)
CFR	<i>Code of Federal Regulations</i>
D ₅₀	mean diameter of riprap rock by weight
DOE	U.S. Department of Energy
ECM	erosion control marker
EPA	U.S. Environmental Protection Agency
FEMA	Federal Emergency Management Agency
ft	foot (feet)
GCAP	Ground Water Compliance Action Plan
LTSP	Long-Term Surveillance Plan
MCL	maximum concentration limit
msl	mean sea level
mg/L	milligram(s) per liter
MW	monitor well
NRC	U.S. Nuclear Regulatory Commission
PMP	probable maximum precipitation
POC	point-of-compliance
POE	point-of-exposure
QA	Quality Assurance
SM	survey monument
SMK	site marker
UMTRA	Uranium Mill Tailings Remedial Action [Project]
UMTRCA	Uranium Mill Tailings Radiation Control Act of 1978 (<i>42 United States Code 7901, et seq.</i>)
USACE	U.S. Army Corps of Engineers
Vitro	Vitro Corporation of America
VP	vicinity property
VPLM	vicinity property low mound

End of current text

1.0 Introduction

1.1 Purpose

This Long-Term Surveillance Plan (LTSP) explains how the U.S. Department of Energy (DOE), as long-term custodian, will meet requirements of the general license for the Canonsburg, Pennsylvania, Disposal Site.

1.2 Legal and Regulatory Requirements

The Uranium Mill Tailings Radiation Control Act of 1978 (UMTRCA) (42 USC §7901), as amended, provides for the remediation and regulation of uranium mill tailings at uranium mill sites regulated under Title I and Title II of the act. Title I addresses former uranium mills that were unlicensed and essentially abandoned as of January 1, 1978. Title II addresses uranium mills that were under specific license on January 1, 1978. In both cases, the licensing agency is the U.S. Nuclear Regulatory Commission (NRC) or possibly, as allowed for in UMTRCA for Title II sites, an Agreement State.

Federal regulations at Title 10 *Code of Federal Regulations* Part 40.27 (10 CFR 40.27) provide for the licensing, custody, and long-term care of uranium mill tailings disposal sites remediated under Title I of UMTRCA. NRC issues a general license for the long-term custody and care of such sites. Long-term care includes institutional control, inspection, monitoring, maintenance, and other measures to ensure that the sites continue to protect public health, safety, and the environment after remediation is completed. The general license becomes effective when a site-specific LTSP receives NRC concurrence. The original LTSP for the Canonsburg site (DOE 1995b) received NRC concurrence on January 16, 1996 (Appendix A).

This revision of the LTSP addresses the remedy for site ground water and incorporates associated requirements. Documentation of NRC concurrence in this revision will be attached to this LTSP when it is produced for distribution. Requirements at 10 CFR 40.27 for the LTSP and for the long-term custody of the Canonsburg site are listed in Table 1-1 in this revised LTSP.

Table 1-1. Requirements for the Long-Term Surveillance Plan and the Long-Term Surveillance and Maintenance of the Canonsburg, Pennsylvania, Disposal Site

Requirements for the LTSP		
No.	Requirement	Revised LTSP
1.	Final site conditions	Section 2.0
2.	Legal description of the site	Appendix B
3.	Long-term surveillance program	Section 3.0
4.	Follow-up inspections	Section 3.4
5.	Maintenance and other actions	Section 3.5 & Appendix C
Requirements for Long-Term Custody		
No.	Requirement	Revised LTSP
1.	Changes to the LTSP	Section 3.1
3.	Permanent NRC Right-of-Entry	Section 3.1
3.	Notification of significant problems or actions	Section 3.6

The plans, procedures, and specifications in this revised LTSP are based on the guidance document, *Guidance for Implementing the Long-Term Surveillance Program for UMTRCA Title I and Title II Disposal Sites* (DOE 2001b). The guidance document and the current LTSP constitute the DOE operational plan for long-term custody of this site.

1.3 Role of the U.S. Department of Energy

In 1988, DOE designated the Grand Junction, Colorado, office to be the program office for the long-term surveillance and maintenance of all DOE remedial action project disposal sites, as well as other sites as assigned, and to be the common office for the surveillance, monitoring, maintenance, and institutional control of these sites. DOE established the Long-Term Surveillance and Maintenance Program at Grand Junction to carry out this responsibility.

In 2003, DOE established the Office of Legacy Management (LM), which assumed responsibility for all closed DOE sites, including the Canonsburg site. The DOE office in Grand Junction, Colorado, is part of the DOE-LM organization. DOE-LM is responsible for the implementation and revision of the LTSP.

2.0 Final Site Conditions

2.1 Site History

The Canonsburg site operated as a radium extraction plant by the Standard Chemical Company from 1911 to 1922. Vitro Corporation of America (Vitro) acquired the property in 1933 and processed ore to extract uranium, vanadium, and radium. From 1942 until 1957, Vitro was under contract to the federal government to recover uranium from ores, concentrates, and residues (waste). The residues were from various U.S. Atomic Energy Commission (AEC) installations and contractors (DOE 1983a).

During Vitro's tenure, solid wastes were stored in piles on site, and liquid wastes were discharged into lagoons in a former swamp (now designated Area C) through a drainage system underneath Strabane Avenue. A drainage ditch connected the swamp to Chartiers Creek.

In 1956, the Oak Ridge Operations Office of AEC approved removal of approximately 11,600 tons (dry weight) of waste materials ("unrecoverable materials—measured") to a railroad landfill in Burrell Township, near Blairsville, Pennsylvania. This removal was completed in 1957. Remediation of this landfill resulted in creation of the Burrell, Pennsylvania, Disposal Site.

From 1957 to 1966, the site was licensed by AEC for storage of remaining residues and waste materials. The real property was sold to industrial developers in 1962. Vitro retained title to the uranium-bearing residues and waste materials. In 1965, Vitro obtained a permit from the Commonwealth of Pennsylvania (State) to move the uranium-bearing materials to Area C. Once these materials were moved to Area C, they were covered with slag and clean fill. Vitro's license terminated after this action.

In 1966, a portion of the property was developed into the Canon Industrial Park by the Canon Development Company, which leased the property to tenant companies for light industrial use. The component properties were acquired by the State in 1982, pursuant to Section 104 of UMTRCA, in anticipation of remedial action by DOE. The State conveyed the disposal site portion of the acquired property to the U.S. Government after remedial action was completed and retained ownership of Area C. The State is finalizing sale of Area C to a private party in 2005, with DOE and NRC concurrence.

Remedial action by DOE began in 1983 and was completed with closure of the disposal cell in December 1985. During the course of remedial action, contaminated materials were removed from 163 vicinity properties and disposed of on site. NRC included the site under the general license of 10 CFR 40.27 on January 16, 1996. On that date, the long-term surveillance and maintenance of the site became the responsibility of DOE, and is now assigned to DOE-LM.

2.2 Area Description

The Canonsburg site is within the Borough of Canonsburg, Washington County, in southwestern Pennsylvania, approximately 20 miles southwest of Pittsburgh (Figure 2-1).

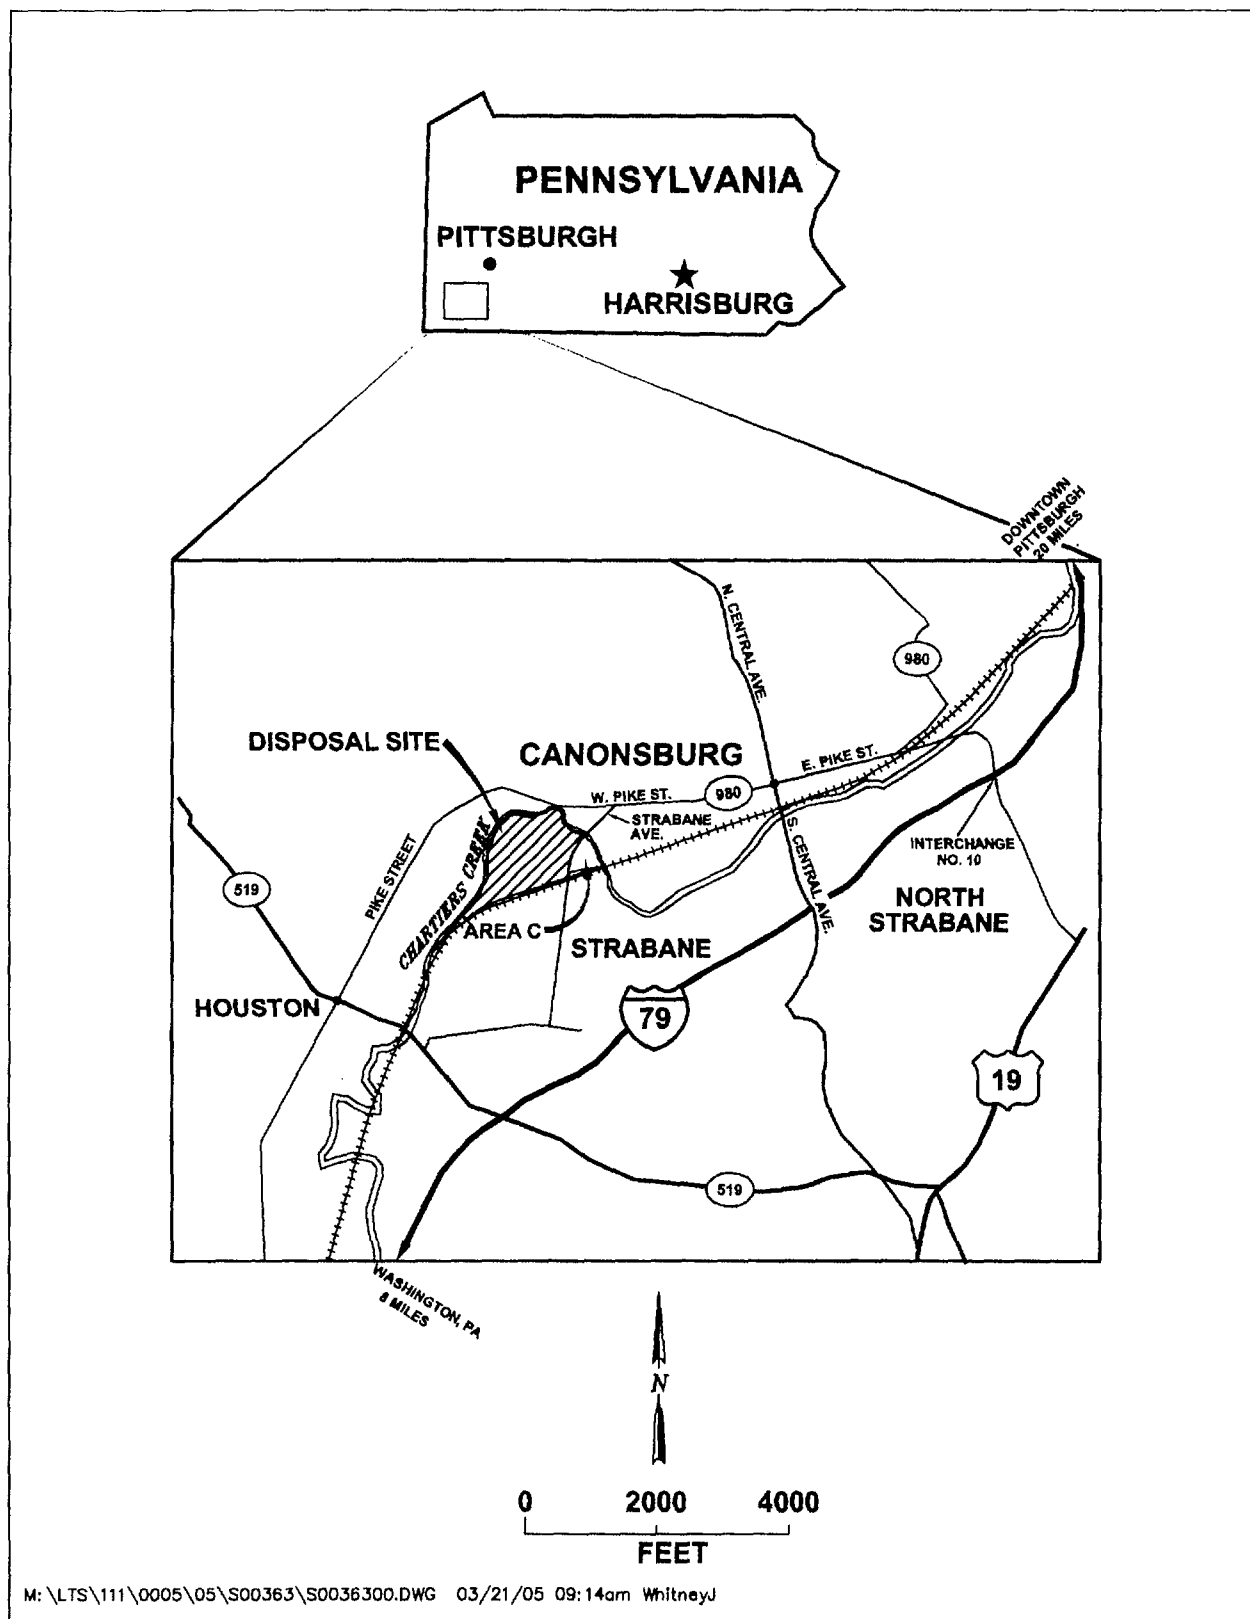


Figure 2-1. Location Map of the Canonsburg, Pennsylvania, Disposal Site

The site, on the south bank of Chartiers Creek, is irregular in shape. It is bounded on the north and west by Chartiers Creek. The north bank of the creek is commercially developed. On the east, the site is bounded by Strabane Avenue and Area C. The Pittsburgh and Ohio Central Railroad and, beyond, the residential community of Strabane border the site on the south. Residences in the Strabane community are as close as 250 feet (ft) to the disposal cell.

The climate is temperate and humid with distinct seasons. The site is far enough from the coast to be influenced more by continental than coastal weather patterns except for hurricane storm systems that occasionally move inland. Temperatures range from a maximum of 99 °F in summer to a minimum of -18 °F in winter. Average temperatures range from the 70s in summer to the upper 20s in winter. Precipitation averages 37 inches per year and is evenly distributed throughout the year. Winds are mainly westerly at moderate speeds.

2.3 Site Description

2.3.1 Legal Description

During remedial action, industrial and residential properties were acquired and combined to become the disposal site. The legal description of the site and a brief history of the acquisition of the various properties are provided in Appendix B. The site boundary is shown on Figure 2-2 and Figure B-1.

2.3.2 Location

Directions to the site follow. See also Figure 2-1.

- Exit at Interchange No. 45 on Interstate 79, turn north (right) into Canonsburg. Follow signs to State Route 980.
- At "T" intersection with traffic light, turn left onto Morganza Road. At the traffic light turn left (west) onto Adams Avenue (State Route 980 South).
- Adams Avenue will merge into East Pike Street.
- At Central Avenue, East Pike Street becomes West Pike Street. Continue south on West Pike Street.
- Turn left at stop light at the intersection of Strabane Avenue and West Pike Street.(look for a hospital sign).
- Cross the bridge over Chartiers Creek. The disposal site is the large fenced space on the right. Area C is on the left.

2.3.3 Site Description

Disposal Site—The site comprises 34.2 acres. It is covered with grass except for several wooded areas that pre-date remedial action. Features described in this LTSP are shown on Figure 2-2.

Disposal Cell—The disposal cell occupies 6.8 acres in the eastern half of the site. It is roughly pentagonal in outline and approximately 700 ft across. The cell contains 266,000 wet tons of

tailings (mill tailings, other residues, contaminated soil, and building debris). The amount of radioactivity within the disposal cell is 100 curies of radium-226.

The disposal cell is a surface impoundment about 28 ft thick at the center. The bottom or "footprint" is about 8 ft below the previous surface of the ground. As built, the disposal cell appears as a knoll. The highest point, at the center, stands about 30 ft above surrounding grade. The disposal cell is completely covered with grass.

The bottom of the disposal cell is lined with a 1-ft-thick layer of sand (capillary break layer) (Figure 2-3). The sand layer is overlain by a compacted clay layer 2 ft thick. The tailings are placed on the compacted clay layer.

The tailings are protected by an engineered cover. The cover is designed to (1) protect the disposal cell from erosion, (2) control the escape of radon to the atmosphere (radon flux), and (3) prevent or minimize infiltration of precipitation. Grass on the disposal cell provides erosion protection and helps reduce moisture in the cover through evapotranspiration.


The cover top slope has a 3-percent grade to promote drainage. The side slopes are steeper at a 20-percent grade (one foot of vertical change to 5 feet of horizontal change). The change in slope between the top and sides is not distinct on most of the cell.

The cover consists of a compacted clay layer (radon barrier), 3 ft thick; a pit-run rock layer for drainage, 1.5 ft thick; and a topsoil layer to support the grass, 1-ft-thick. The side slopes are similarly constructed except that the pit-run drainage layer is 2 ft thick for additional erosion protection. The median size of the rock (D_{50}) in the pit-run layer on top of the disposal cell is 6 inches. The D_{50} of rock in the pit-run layer on the side slopes is 16 inches. (D_{50} is a measure such that 50 percent of the rock by weight is of the indicated diameter size or larger. All rock sizes given in this LTSP are the D_{50} size.)

Drainage Structures—Rock-lined diversion channels surround the disposal cell. These channels intercept runoff and convey it to Chartiers Creek via two outflow channels. Another rock-lined channel, the perimeter drainage ditch, protects the railroad grade on the south and Strabane Avenue on the east from runoff and erosion. The D_{50} of the rock in the rock-lined diversion channels is 16 inches. In the perimeter ditch, the D_{50} is 6 inches.

Vicinity Property Low Mound—A feature labeled "VP [vicinity property] low mound" on some early drawings (hereafter, VPLM), immediately northwest of the disposal cell contains 943 cubic yards of waste materials from vicinity properties. This material includes low-level contaminated materials received too late for inclusion in the disposal cell. The VPLM is approximately 70 ft by 90 ft in plan and 2 to 3 ft deep. One foot of soil and well-established grass covers the VPLM disposal area. Despite the term "mound," the surface expression of the VPLM is only about 1 ft above surrounding grade.

Buried Riprap Wall—The site is on the south bank of Chartiers Creek. On the west and north, the site is protected from flooding by a high, stable, natural stream bank supported by undisturbed bedrock and mature hardwood forest. On the northeast, along the creek between erosion control markers ECM-2 and ECM-2A (Section 2.3.5) and the Strabane Avenue bridge, the site is bordered by a narrow floodplain.

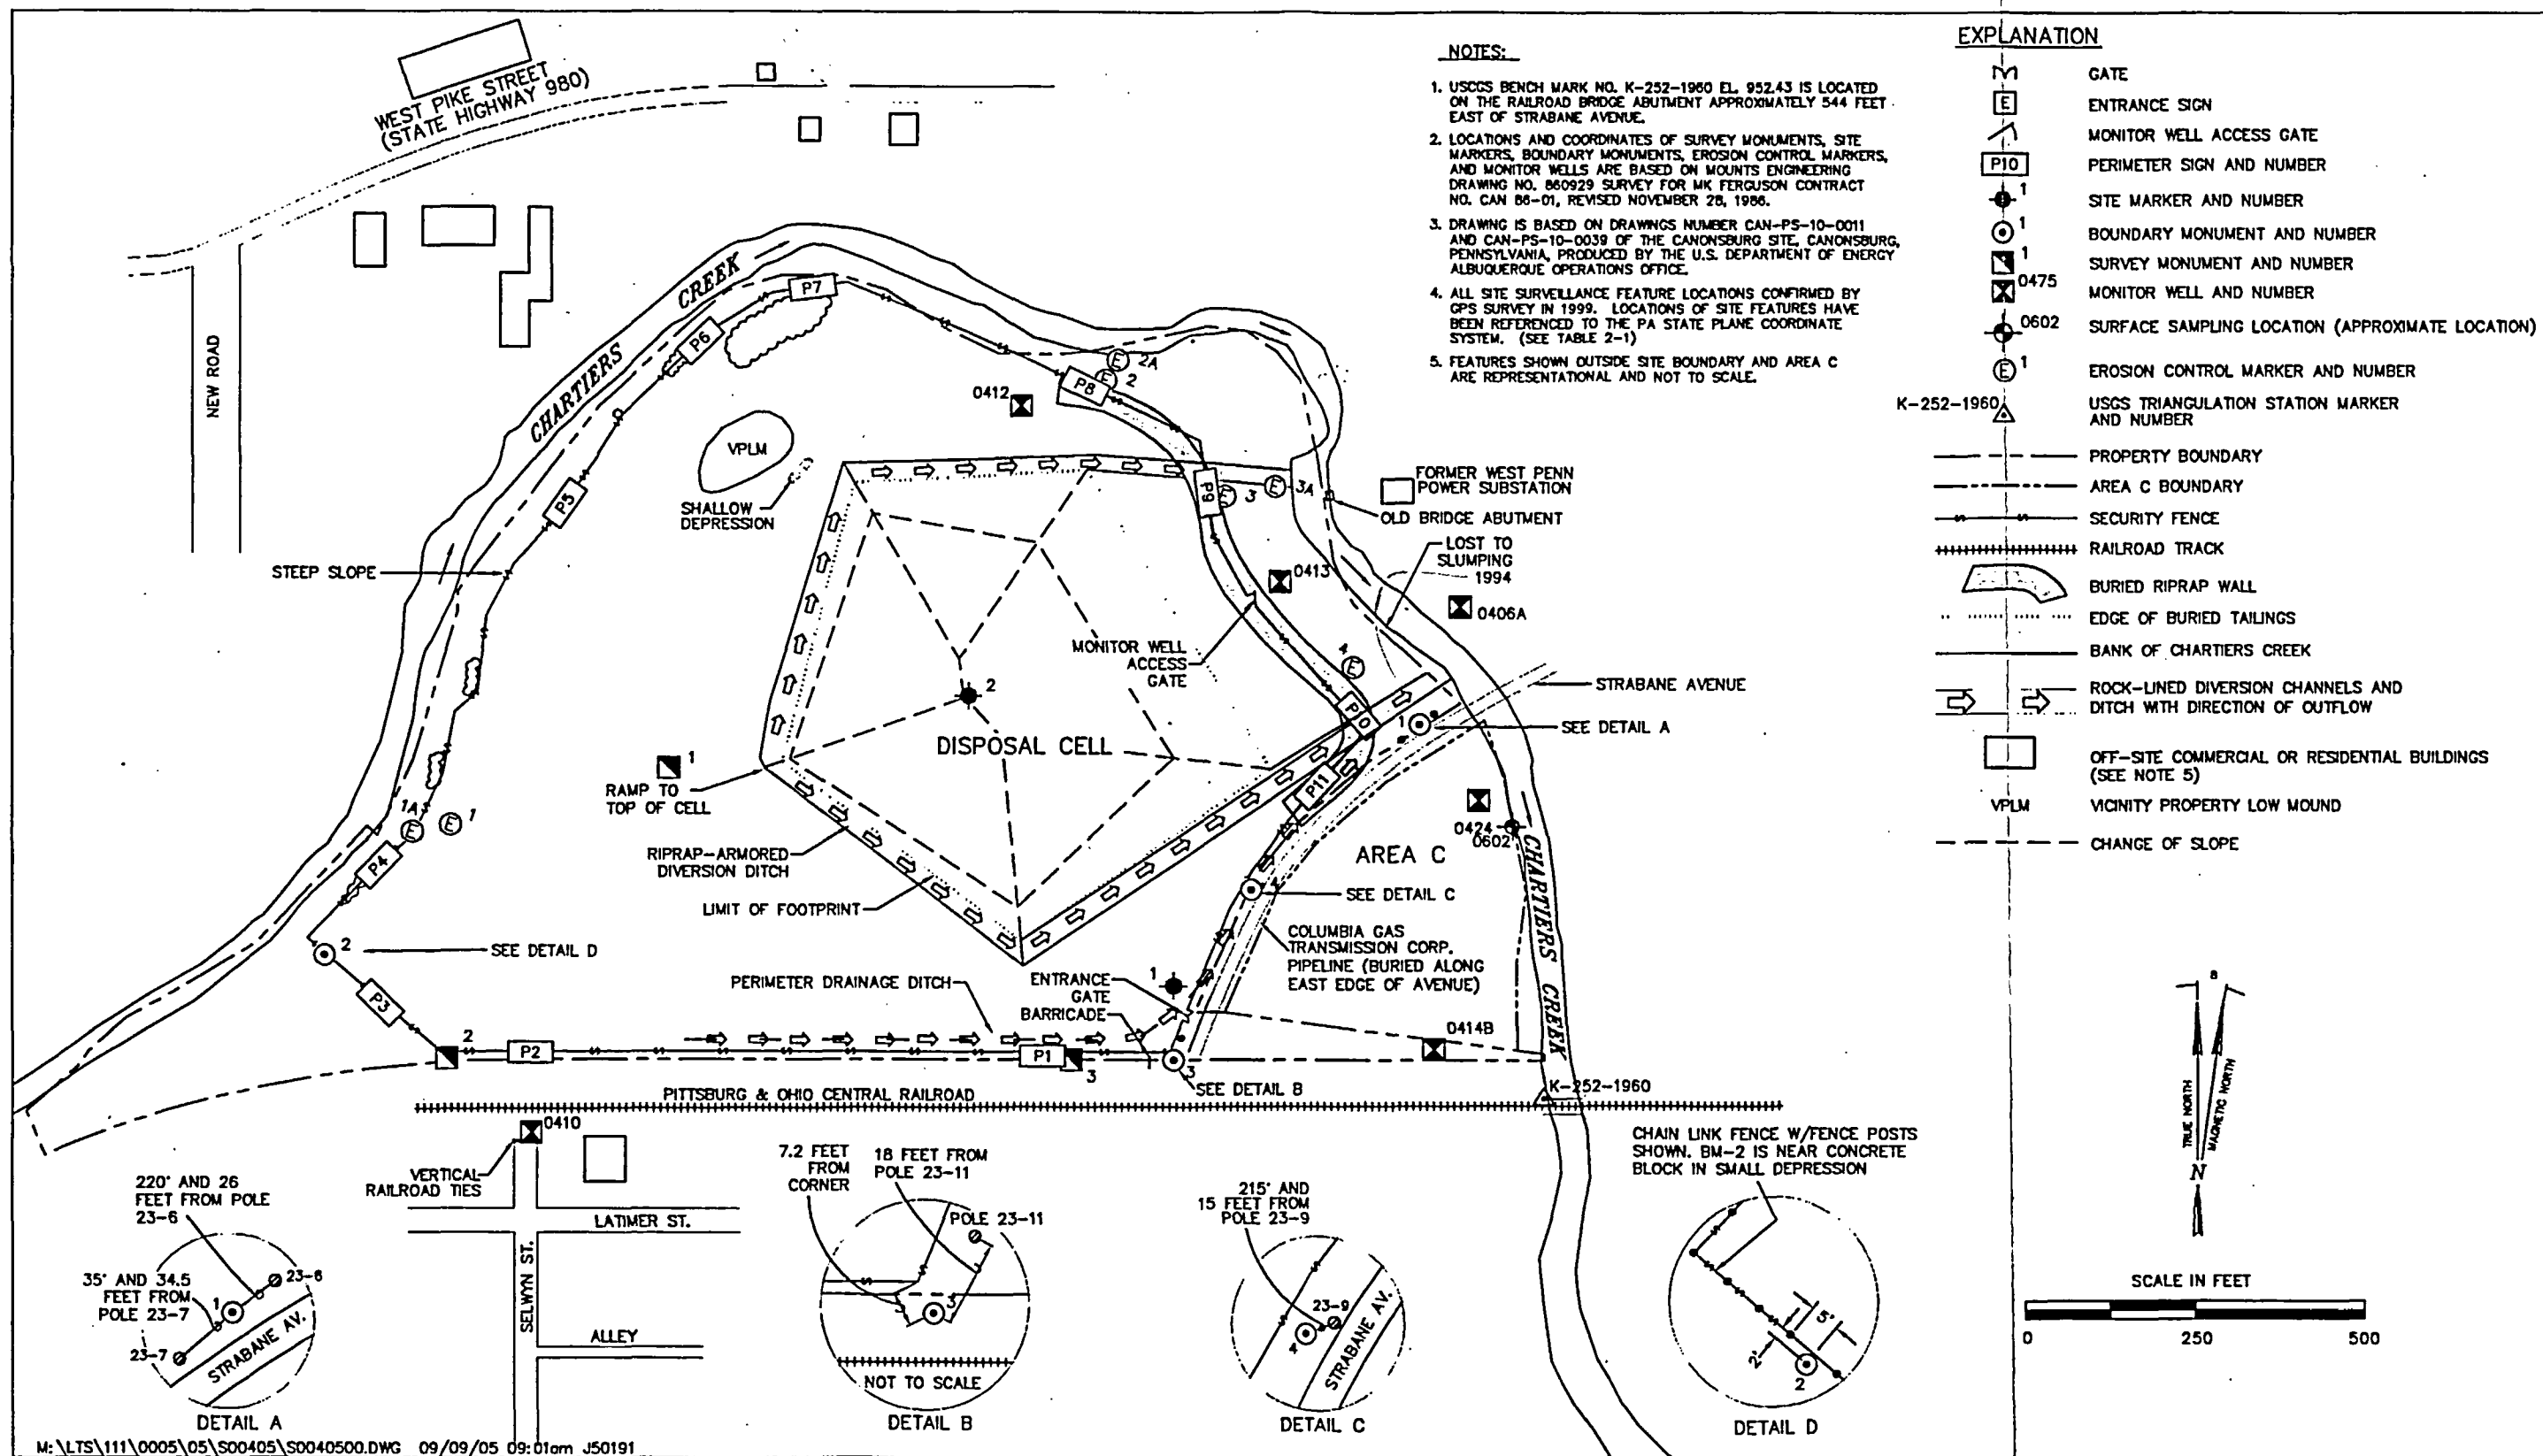

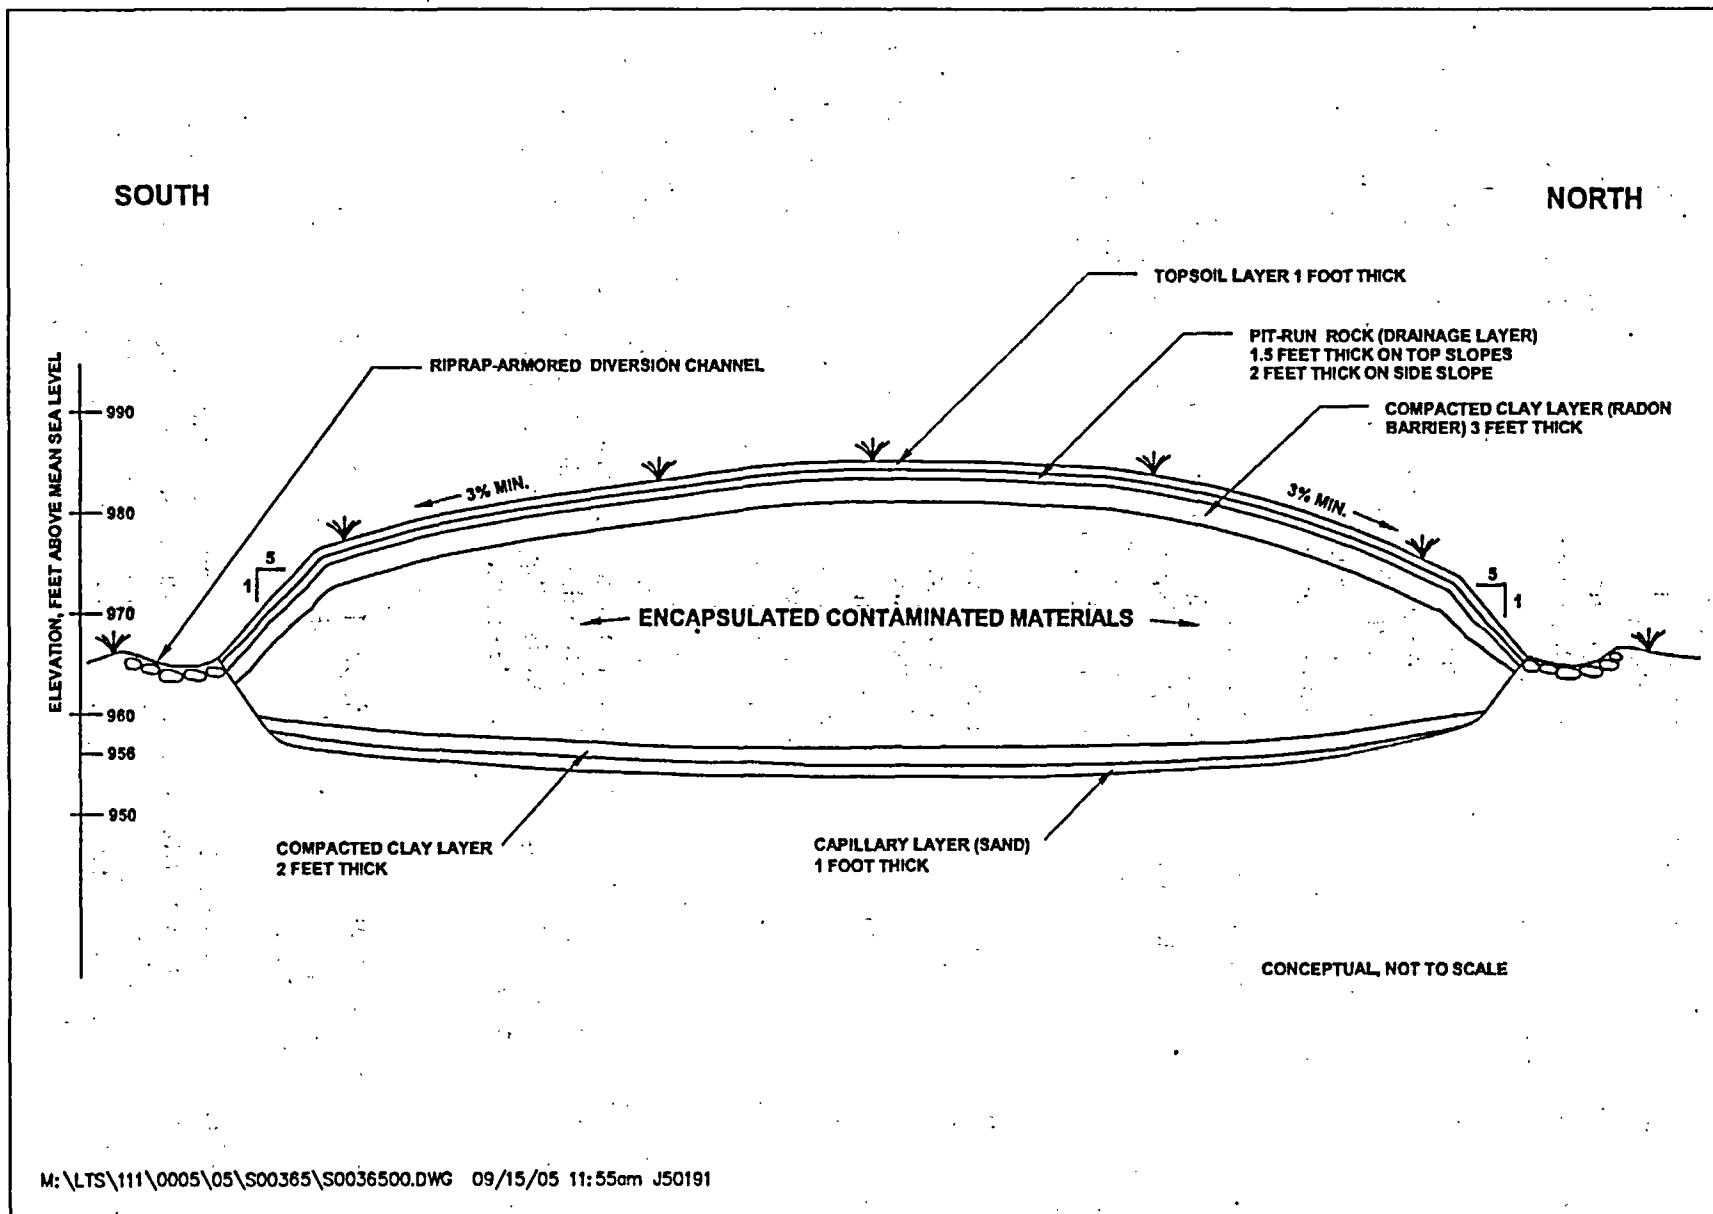


Figure 2-3. North-South Cross Section of the Canonsburg, Pennsylvania, Disposal Site

The east portion of the site along Chartiers Creek is within the 100-year floodplain and is subject to flooding during extreme (rare) storm events. To protect the disposal cell from erosion, a buried riprap wall was constructed between the disposal cell and the creek (Figure 2-4). This wall is approximately 850 ft long. It extends from up stream of ECM-2 and ECM-2A, downstream (southeast) to Strabane Avenue where it wraps around toward the southwest, parallel to Strabane Avenue.

The wall is constructed on a 2:1 slope along the northeast edge of the disposal cell (DOE 1983b and 2001a). The wall is 18 inches thick and constructed of rock with a D_{50} of 12-inches. The toe of the wall is keyed into bedrock to a depth of 1 ft. The wall is covered with clean fill except where it bends toward the southwest, where it is covered by rock in the outflow channel and perimeter drainage ditch that parallels Strabane Avenue.

On the basis of estimates from the Federal Emergency Management Agency (FEMA), the maximum water elevation for a 500-year flood is 954 ft above mean sea level (msl), and for a 100-year flood, 950 ft msl (DOE 1983b). Calculations by DOE for the probable maximum precipitation (PMP) event and the 1,000-year flood are 973 ft msl and 955 ft msl, respectively (DOE 1983b). (The PMP is a theoretically "worst possible" storm event of extremely low probability.)

Under PMP conditions, water may overtop the high bank west of the disposal cell and VPLM, but the shallow depth and low velocity of the water are considered insufficient to threaten either feature, both of which are protected by well-established turf and, in the case of the disposal cell itself, an engineered cover designed to prevent erosion from overland flows. Flooding from a 1,000-year storm event would only reach an elevation of 955 ft msl, 13 ft below the VPLM at its deepest point. The risk of flood damage to the VPLM disposal area, including the possibility that flood water could erode and expose buried materials, is therefore not credible.

Area C—Area C, a parcel of 3.1 acres, was acquired by the State prior to remedial action. Area C was not required for the disposal system and therefore was not included within the final disposal site boundary. Residual contamination in Area C consists of decreasing concentrations of uranium in ground water (Section 2.4.4) and two thorium-230 (Th-230) anomalies discovered at depths of 6 and 8 ft (Section 3.5.2). The State is selling this parcel to a private party. Perpetual deed restrictions apply as a condition of that sale (Section 2.3.4 and Appendix B).

2.3.4 Institutional Controls

Disposal Site—Institutional controls at the disposal site consist of federal ownership (withdrawal) of the property. This is backed up with physical access controls (warning signs and a chain-link security fence).

Area C—In accordance with UMTRCA 104(e), the State is concluding the sale of Area C to a private party. Prior to the sale, NRC concurred that institutional control to restrict ground water use beneath Area C was no longer required (NRC 2003; see memorandum in Appendix B). (NRC, however, requested that DOE continue to monitor ground water and surface water associated with Area C to account for the uncertainty in the ground water modeling [Section 3.7.1].)

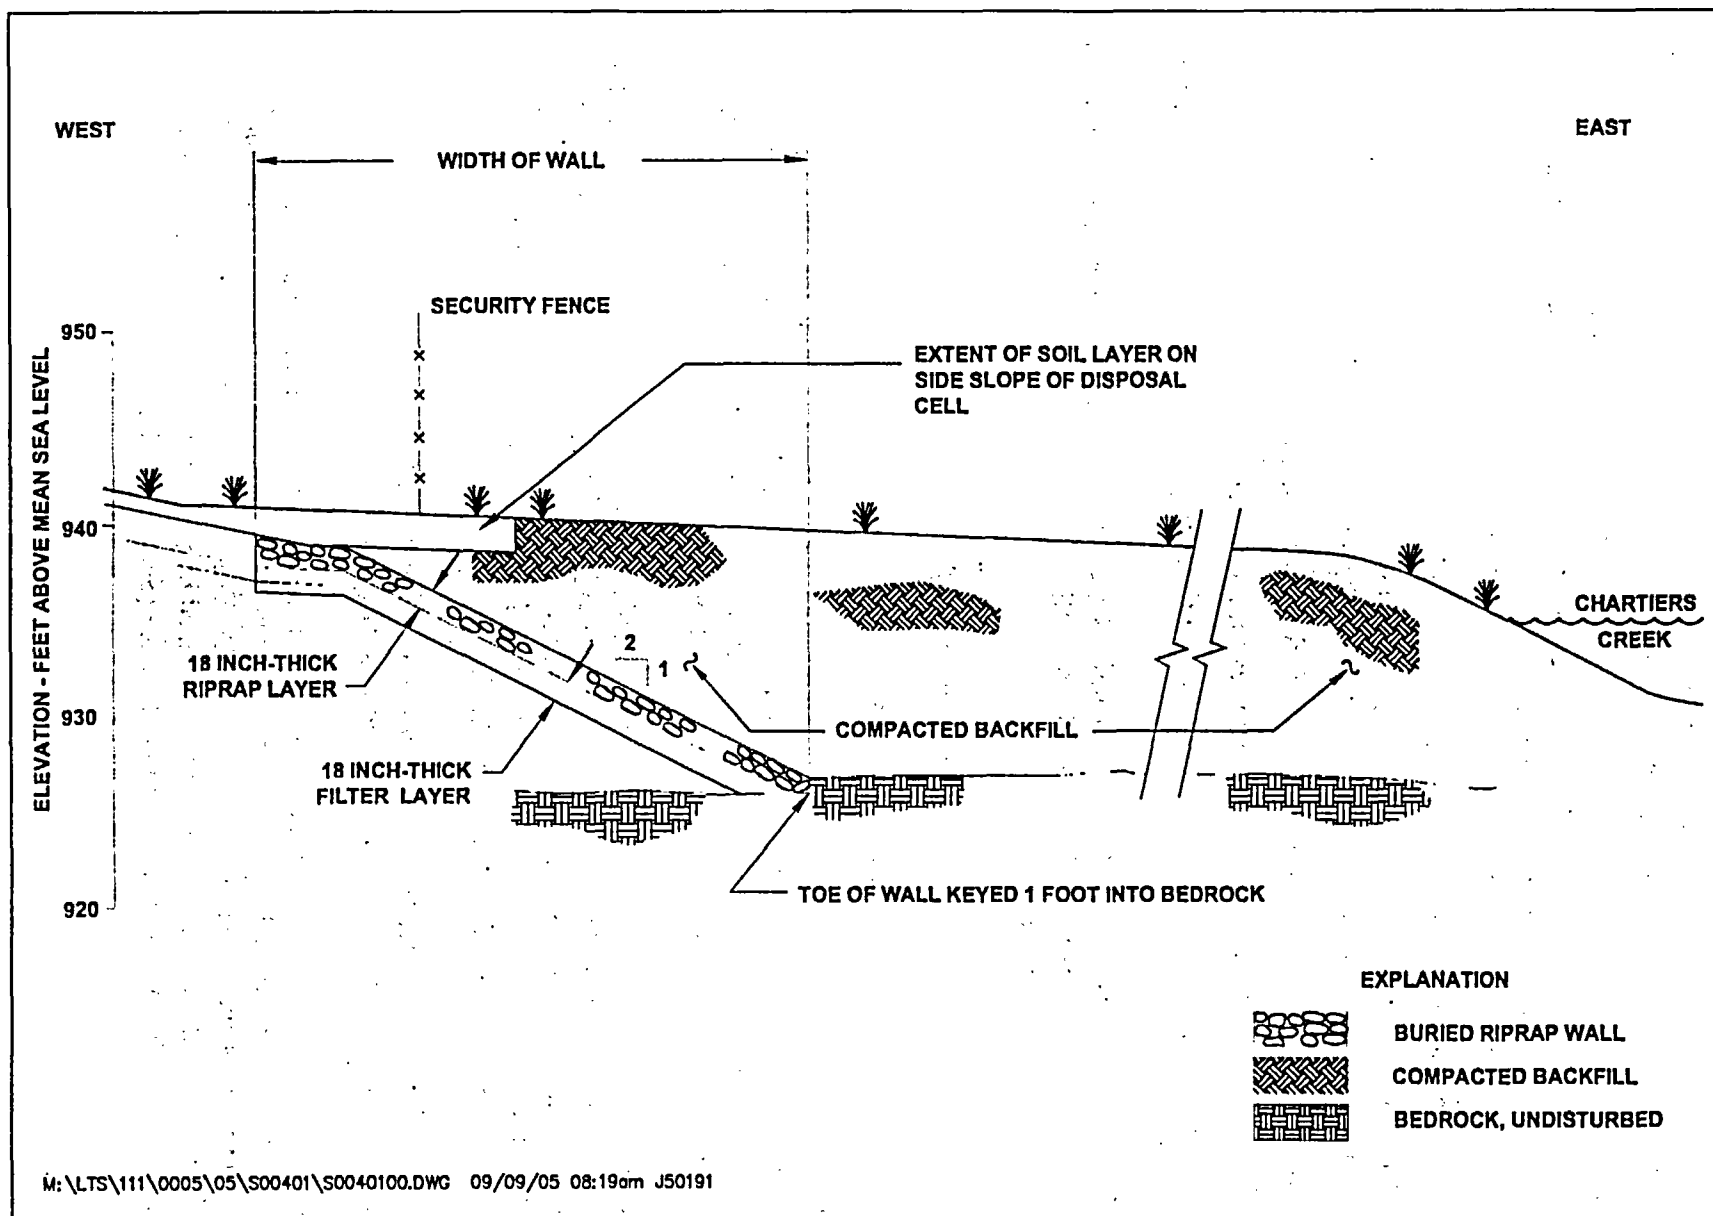


Figure 2-4. East-West Cross-Section Through Buried Riprap Wall, Canonsburg, Pennsylvania, Disposal Site

Deed restrictions, summarized below, are a condition of sale and are applicable to the present and all future owners of the parcel known as Area C. These restrictions will be recorded in the Records of the County of Washington, Pennsylvania, when sale of Area C is finalized.

1. If a structure is to be built, the owner shall not excavate deeper than 4 ft. Excavations for utilities shall not exceed 6 ft. This is to prevent exposure of thorium anomalies at depths greater than 6 ft. Exceptions to this restriction require written approval from both DOE and the Pennsylvania Department of Environmental Protection.
2. Use of ground water is not restricted.
3. The owner shall grant DOE access to one monitor well (MW-0424) and one surface water sampling location along Chartiers Creek on the east side of Area C.
4. The owner may not develop or use Area C for residential purposes.
5. The owner is advised to monitor structures for indoor radon levels.
6. The owner shall maintain the integrity [prevent erosion] of the stream bank along Chartiers Creek.
7. These restrictions shall endure in perpetuity. Except for Restriction 3, these restrictions may be removed by consensus decision of both DOE and the Pennsylvania Department of Environmental Protection.

Full text of the deed restrictions, as proposed, is in Appendix B.

2.3.5 Specific Site Surveillance Features

Features described in this section are shown on Figure 2-2. Specifications for construction of most of these features are in the guidance document (DOE 2001b). Coordinates for boundary monuments, survey monuments, and site markers are established to second-order standards and were confirmed by global positioning system in 1999 (Table 2-1).

Security Fence—Most of the Canonsburg disposal site is enclosed by 6-ft-high chain link fence (Figure 2-2). Three strands of barbed wire extend beyond the top of the fence. There are two large gates in this fence: an entrance gate at the southeast corner of the site along Strabane Avenue and a monitor well access gate northeast of the disposal cell near monitor well MW-0413. Both gates are secured by padlocks.

Two extensions of the site, one at the southwest corner, the other across Strabane Avenue at the southern end of Area C, are unfenced (Figure 2-2).

Along the upstream reach of the creek, the fence is at the top of the high bank above the creek. As explained in Section 2.3.3, the slope that descends to the creek, although steep, is wooded with mature trees and underlain by stable bedrock. Erosion or slumping along this bank that could destabilize the fence will be easily recognized by inspectors and may, depending on severity, constitute an action level for maintenance (Section 3.6.1).

**Table 2-1. Location of Monuments, Markers, and Monitor Wells, at the
Canonsburg, Pennsylvania Disposal Site**

Locations of Monuments, Markers, and Wells Site Construction Grid		
Survey Monuments		
SM-1	N 10319.98	E 10090.07
SM-2	N 9891.20	E 9760.39
SM-3	N 9890.40	E 10682.67
Boundary Monuments		
BM-1	N 10385.38	E 11197.87
BM-2	N 10043.42	E 9579.83
BM-3	N 9890.05	E 10833.33
BM-4	N 10140.95	E 10948.08
Site Marker		
SMK-1	N 9999.10	E 10833.44
SMK-2	N 10426.44	E 10529.88
Erosion Control Marker		
ECM-1	N 10199.73	E 9810.11
ECM-1A	N 10225.24	E 9710.07
ECM-2	N 10890.30	E 10735.17
ECM-2A	N 10919.92	E 10739.93
ECM-3	N 10720.09	E 10910.04
ECM-3A	N 10734.94	E 10984.88
ECM-4	N 10470.09	E 11099.86
ECM-4A ^a	N 10514.93	E 11144.86
Active Monitor Wells		
0412	N 10852.96	E 10609.73
0413	N 10595.25	E 10992.32
0424	N 10273.31	E 11284.79
0414B	N 9905.72	E 11217.43
0406A	N 10556.79	E 11256.55

Locations of Monuments, Markers, and Wells Pennsylvania South Zone State Plane Coordinates		
Survey Monuments		
SM-1	N 345348.78	E 1315889.53
SM-2	N 344840.58	E 1315704.38
SM-3	N 345117.74	E 1316584.03
Boundary Monuments		
BM-1	N 345744.96	E 1316926.14
BM-2	N 344931.32	E 1315486.35
BM-3	N 345162.81	E 1316727.80
BM-4	N 345436.63	E 1316761.61
Site Marker		
SMK-1	N 345266.82	E 1316695.05
SMK-2	N 345582.82	E 1316276.83
Erosion Control Marker		
ECM-1	N 345149.76	E 1315658.82
ECM-1A	N 345143.93	E 1315555.75
ECM-2	N 346086.98	E 1316332.79
ECM-2A	N 346116.66	E 1316328.40
ECM-3	N 345977.38	E 1316550.82
ECM-3A	N 346014.09	E 1316617.71
ECM-4	N 345796.20	E 1316807.15
ECM-4A	N 345852.52	E 1316836.56
Active Monitor Wells		
0412	N 346013.57	E 1316224.43
0413	N 345883.13	E 1316666.90
0424	N 345664.29	E 1317042.79
0414B	N 345293.49	E 1317089.33
0406A	N 345927.84	E 1316931.23

^aAs-built (Section 2.3.5). Monument lost to slumping in 1997.

Boundary Monuments—There are four permanent boundary monuments (BM). All are on the property line. BM-1, BM-3, and BM-4 are on the east side of the site near Strabane Avenue; BM-2 is at the west end of the site. Finding aids, in the form of details with measurements, are included on Figure 2-2.

Survey Monuments—There are three permanent survey monuments. SM-1 is on high ground just west of the disposal cell. SM-2 and SM-3 are along the southern boundary of the site.

Survey and boundary monuments and erosion control markers (below) are anchored in concrete 1 to 1.5 ft below the frost line. The frost line is approximately 4 to 4.5 ft deep.

Site Markers—Site markers are unpolished granite monuments. SMK-1 is inside the entrance gate at the southeast corner of the site. SMK-2 is at the highest point on the disposal cell. The markers are inscribed with a diagram to show the site boundary and location of the disposal cell

inside the site boundary, the date of closure (December 1985), the wet tonnage of tailings (266,000 wet tons), and the level of radioactivity (100 curies of radium-226).

Signs—Eleven perimeter (warning) signs are mounted on the security fence around the site. The signs are metal or plastic, approximately 24 inches wide and 18 inches high. Perimeter signs identify the site as a uranium mill tailings repository and that the site is U.S. Government property, no trespassing allowed. The international symbol for radioactive materials (trefoil) on the signs warns of the potential hazard, although there is no hazard as long as the engineered cover over the tailings remains intact and disposal site ground water is not used.

An entrance sign is posted on the entrance gate. This sign provides the same information as the perimeter signs and also has the site name and a 24-hour telephone number in case of emergencies or inquiry (Section 3.4.1).

Erosion Control Markers—Four pairs of erosion control markers (ECMs) were installed along the bank of Chartiers Creek. Damage to any of the markers serves as a trigger for potential follow up action (see Section 3.6.1).

The first pair (ECM-1 and ECM-1A) is on the edge of the high bank above the creek at the west end of the site. The other three pairs (ECM-2 and ECM-2A, ECM-3 and ECM-3A, and ECM-4 and ECM-4A) are installed along the downstream reach of the creek where the high bank flattens and widens into a narrow floodplain along the edge of the creek north and northeast of the disposal cell. In 1997, inspectors noted the loss of ECM-4A. Erosion at ECM-4A was localized and more than 80 ft from the buried riprap wall that protects the disposal cell and VPLM.

Each ECM is a Berntsen A-1 monument. The monuments are 5 ft in length and set in the ground so that the bottom of the monument is below the frost line. Only about 1 ft of the monument is exposed above the surface. The innermost ECM in each pair north and northeast of the disposal cell (ECM-2, ECM-3, and ECM-4), is on or near the outer edge of the buried riprap wall that lies between the creek and the disposal cell (Section 2.3.3).

When one of the outer markers in an ECM pair is lost to erosion, as occurred with ECM-4A in 1997, DOE will note this event in its annual report to NRC (Section 3.3.5) and in the inspection checklist for the next annual inspection (Section 3.3.3). If it becomes apparent that the second or innermost ECM in the pair is threatened by erosion, this may constitute an action level for evaluation, intervention, or maintenance by DOE (Section 3.6.1).

Monitor Wells—There are six monitor wells remaining at the Canonsburg site (Figure 2-1). Other wells, installed during remedial action, have been decommissioned.

Two wells (MW-0412 and MW-0413) are on site and downgradient from the disposal cell. Two other wells (MW-0414B and MW-0424) are across Strabane Avenue in or near Area C. A fifth well (MW-0406A) is across Chartiers Creek to the northeast. The sixth well (MW-0410) is a background well south of the railroad tracks.

2.4 Ground Water and Surface Water

2.4.1 Geology

The uppermost aquifer beneath the Canonsburg site consists of unconsolidated materials overlying bedrock of the Pennsylvanian Casselman Formation. The unconsolidated materials are composed of sandy loam, silty clay, clay, alluvium, and fill material up to 30 feet thick. The fill consists of cinders, stones, and building rubble. These materials are heterogeneous and do not form discrete, continuous units. The permeability is variable because of the types and placement of the materials.

The underlying bedrock of the Casselman Formation is composed of gray and black carbonaceous shales, and sandy shales with thin coal seams and calcareous shales (DOE 1983a). Some resistant sandstone is present in the shallow subsurface beneath the site as evidenced by exposures in the stream bank north and northwest of the site. The sandstone is nearly flat-lying, jointed, and has well-defined bedding planes. The upper part of the Casselman Formation is weathered and jointed.

2.4.2 Ground Water

Ground water is present in the interconnected unconsolidated materials and shallow bedrock (uppermost aquifer) under unconfined to semi-confined conditions, with a saturated thickness of approximately 10 feet. Ground water in the unconsolidated materials flows toward Chartiers Creek, which is the normal discharge zone for the shallow ground water. The unconsolidated materials and shallow bedrock are hydrologically connected. Because of the heterogeneity of the unconsolidated materials, hydraulic interconnection from place to place is variable, and water may perch on clay layers. Saturated thickness is approximately 10 ft but variable.

Gradient in the unconsolidated materials is toward Chartiers Creek, the normal discharge zone for the shallow ground water (Figure 2-5). Flow in the shallow bedrock is downward and then through zones of secondary porosity along joints, fractures, and bedding planes. A low-permeability rock formation separates ground water in the shallow bedrock from higher quality water in deeper aquifers.

Although some ground water is present in the unconsolidated materials and shallow bedrock beneath the site, neither unit is considered a viable aquifer from a water resource perspective, but only in the sense that the zone is capable of discharging to surface water (Appendix A to 10 CFR Part 40). Because the materials are not ideal for aquifer formation and the source of recharge to the shallow units is minimal, sustained yield to a well from these units would be limited. Shallow ground water is not normally used as a drinking water supply in the area, although some domestic water is derived from a few private wells deeper than 100 feet.

2.4.3 Surface Water

Chartiers Creek is a partially incised, meandering stream. Its course in the vicinity of the Canonsburg disposal site is altered by clearing and fill associated with commercial development and by flood control projects completed by the U.S. Army Corps of Engineers. At normal (low water) stage, the creek is approximately 15 to 20 feet wide and 2 to 3 feet deep. The catchment (upstream drainage basin) is approximately 80 square miles. Chartiers Creek is a tributary to the Ohio River 15 miles down stream of the disposal site.

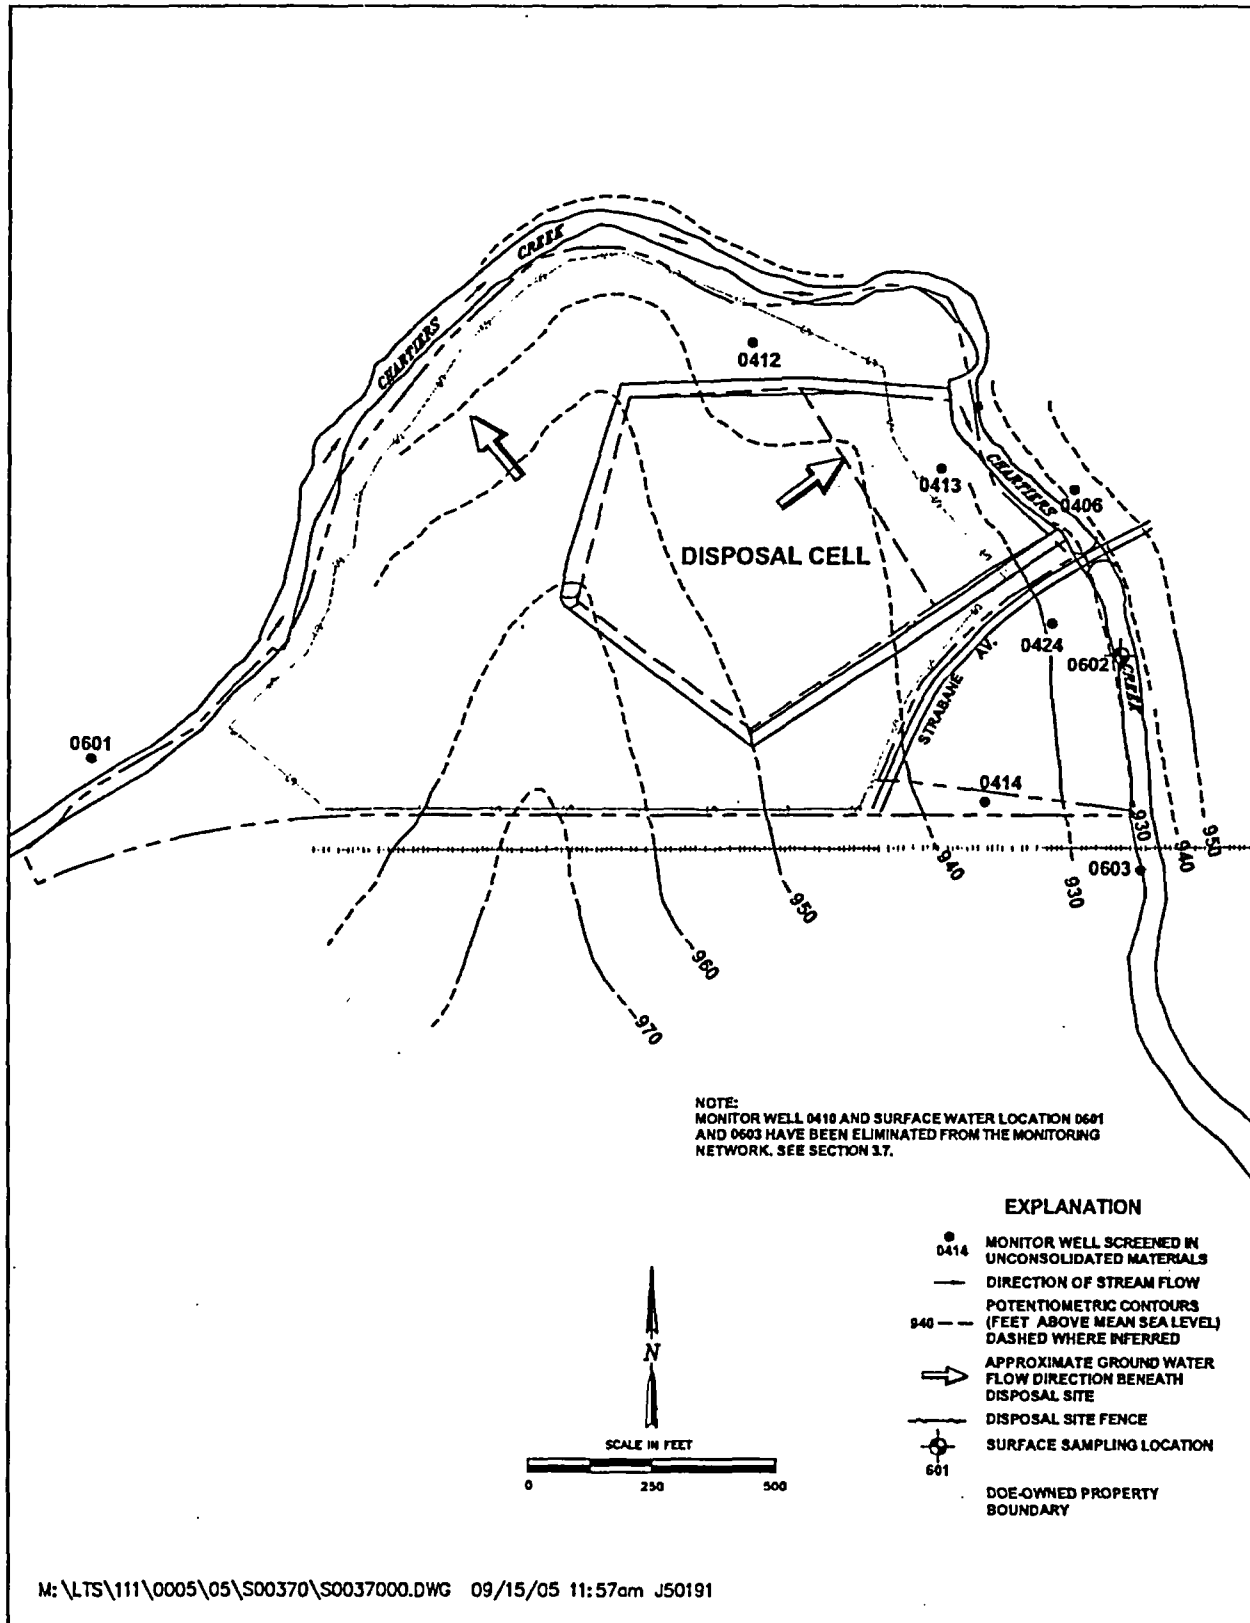


Figure 2-5. Potentiometric Surface, Monitor Wells, and Surface Water Sampling Locations, Canonsburg Disposal Site

The creek is not a source of potable water. Most of the residents in the area are connected to a municipal water system, which is supplied by surface water reservoirs upgradient from the site.

2.4.4 Water Quality

Water quality at the Canonsburg site, both before and immediately following remedial action, is described in the Baseline Risk Assessment (DOE 1995a) and the original LTSP (DOE 1995b). DOE began monitoring surface water and ground water in 1986. Ground water and surface water samples have been analyzed for three specific analytes considered in the Baseline Risk Assessment as risk drivers and key constituents for monitoring trends in water quality and demonstrating compliance with the ground water protection standards (uranium, molybdenum, and manganese) along with standard water quality indicators (calcium, chloride, magnesium, potassium, sodium, and sulfate). Reference standards used as benchmarks for uranium and molybdenum are the maximum concentration limits (MCL) established in 40 CFR 192. A risk-based concentration (RBC) has been established for manganese based on EPA documentation (Table 2-2).

Table 2-2. Reference Standards for Ground Water and Surface Water Monitoring at the Canonsburg Disposal Site

Analyte	Standard/MCL	ACL	Standard Source
Uranium – ground water	0.044 mg/L	1.0 mg/L	40 CFR 192 -- MCL
Uranium – surface water	0.044 mg/L	0.01 mg/L	40 CFR 192 -- MCL
Molybdenum	0.1 mg/L	--	40 CFR 192 -- MCL
Manganese	1.7 mg/L	--	Risk-based concentration (EPA)

Results of monitoring indicate that some site-related contamination is present in ground water in the uppermost aquifer both downgradient from the disposal cell and adjacent to Chartiers Creek. Uranium is the only constituent of potential concern that exceeds the MCL in ground water. Data since monitoring began indicate that concentrations of other constituents in ground water remain relatively stable.

Since remedial action, residual contamination in the shallow, saturated, unconsolidated materials has presumably continued to migrate and discharge into Chartiers Creek. Elevated levels of uranium, manganese, molybdenum, selenium, and other constituents have been identified in the ground water. With the exception of uranium, levels of all constituents that were previously elevated relative to existing standards or background levels have decreased to, and remain at, acceptable levels.

An assessment of water quality results for the three specific analytes from 1995 (date of predecessor LTSP) through 2004 is provided below. Overall there is no unacceptable risk to human health and the environment based on concentrations of these specific analytes in ground water and surface water, and levels are below the respective standards and limits.

Uranium—Concentrations of uranium in ground water in the uppermost aquifer beneath the site remain above the MCL, but below the ACL, at the POC wells adjacent to the disposal cell (Figure 2–6). Spatial distribution of uranium in ground water in the unconsolidated materials is variable, and no well-defined plumes are apparent. This is a result of the heterogenous nature of the uppermost aquifer materials, the amount of recharge (primarily precipitation), and the variable ground water flow direction in the unconsolidated materials. In general, the geochemistry of ground water beneath the site is favorable for the mobilization of uranium.

Concentrations of uranium in ground water in POC wells 0412 and 0413, adjacent to disposal cell, are still above the MCL of 0.044 mg/L, but are considerably lower than the ACL of 1.0 mg/L. Although uranium concentrations have fluctuated since 1995, they have remained within the range historically observed at the site (Figure 2–6). Background (upgradient) levels in ground water in monitor well 0410 have been consistently at or below the laboratory detection limit (approximately 0.001 mg/L). Concentrations of uranium in ground water in monitor well 0414 in Area C are decreasing and below the MCL. Concentrations in monitor well 0406 across Chartiers Creek are also very low.

Uranium has been at or below the laboratory detection limit in surface water in Chartiers Creek at all three sampling locations since 1995.

Molybdenum—Concentrations of molybdenum in ground water near the site are typically very low and have been at or near the laboratory detection limit since 1995.

Concentrations of molybdenum in surface water in Chartiers Creek exceeded the MCL in 1998; the highest concentration (0.119 mg/L) was at former upstream sampling location 0601. In 2004, concentrations in surface water samples ranged from 0.026 to 0.03 mg/L. The value at the upstream sampling location was 0.025 mg/L. Because concentrations are higher in the creek than in ground water at the site, elevated molybdenum levels in surface water samples appear to derive from upstream sources and not from site-related activities.

Manganese—Elevated concentrations of manganese are present at MW–0412 just north of the disposal cell. High concentrations are also present at other monitor wells, including background monitor well MW–0410. Elevated concentrations well above the secondary standard in the background well indicate that manganese is probably a naturally occurring constituent near the disposal site and not exclusively related to processing activities at the former millsite. Elevated concentrations of manganese in ground water appear to be widespread and are probably related to the continental sedimentary rocks (including the underlying Casselman Formation) and the associated coal beds these rocks contain (DOE 1998).

Concentrations of manganese in surface water are significantly below the RBC of 1.7 mg/L and are within the range of ecological benchmarks for aquatic biota (as high as 1.27 mg/L; Suter and Tsao 1996). Manganese from the vicinity of monitor well 0412, potentially discharging to Chartiers Creek, has not impacted surface water and does not present a risk to human health and the environment. Concentrations of manganese in Chartiers Creek are similar at sampling locations upstream, adjacent to, and downstream of the site. Much of the manganese in the creek is probably naturally occurring and related to coal deposits in the area. Manganese is often present in streams receiving drainage from coal mines in concentrations in excess of 1 mg/L (Hem 1985).

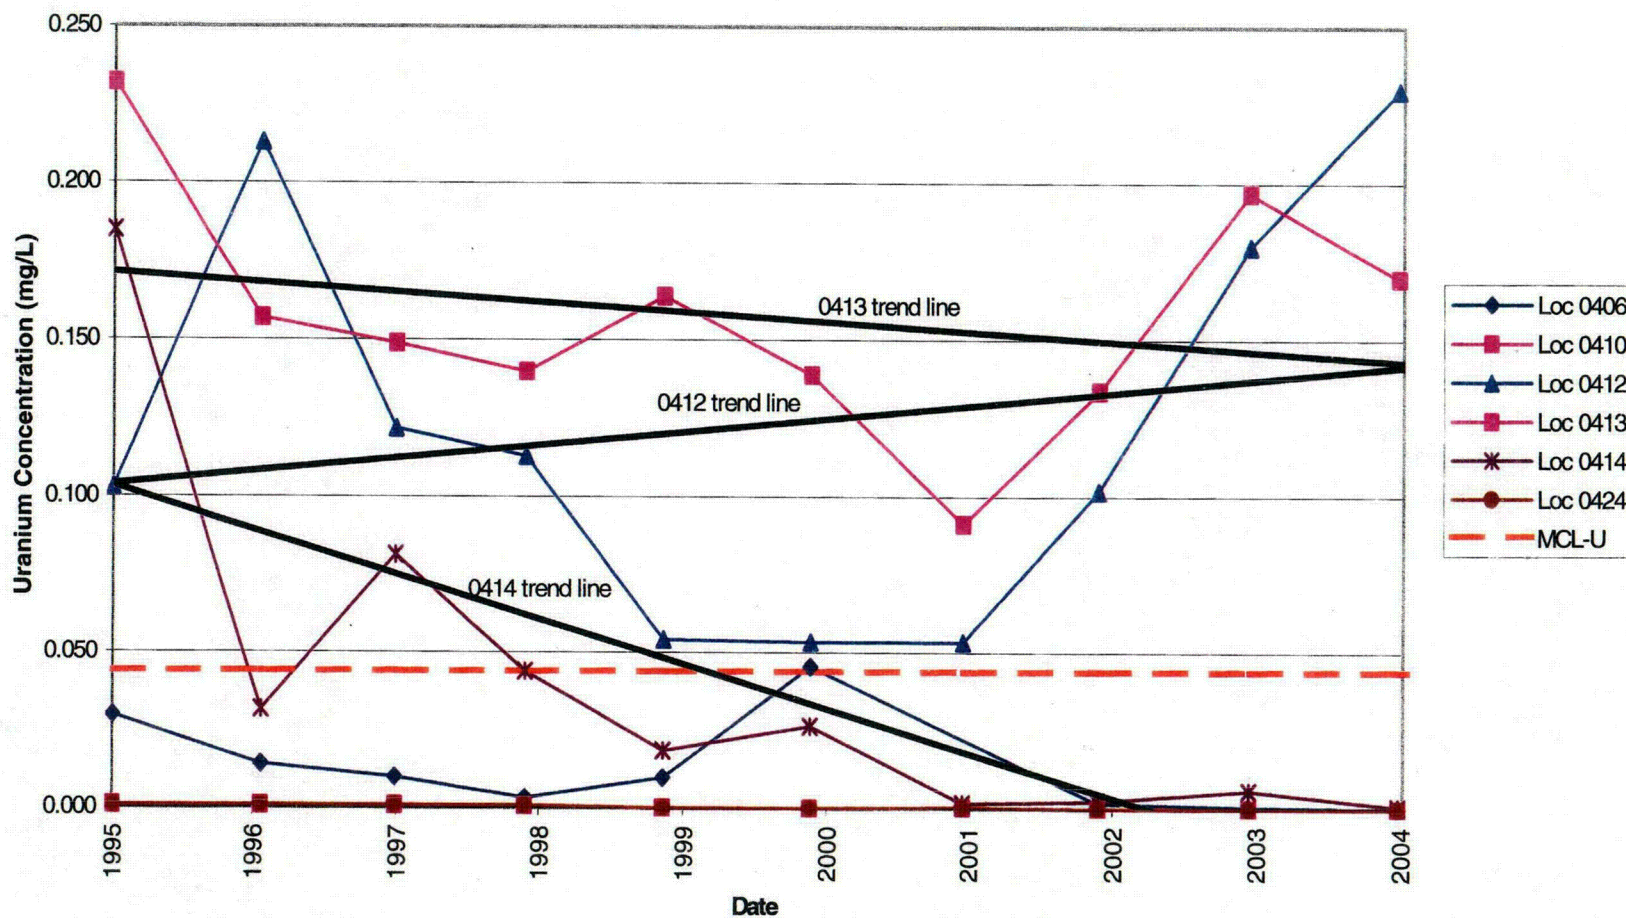


Figure 2-6. Uranium Concentration Trends in Ground Water at the Canonsburg, Pennsylvania, Disposal Site, 1995-2002

C01

End of current text

3.0 Long-Term Surveillance Program

3.1 General License for Long-Term Custody

With NRC concurrence in the original LTSP (Appendix A), the Canonsburg site was included under the general license for long-term custody for UMTRCA Title I sites [10 CFR 40.27].

Although sites remediated under UMTRCA are designed and constructed to last "for up to 1,000 years, to the extent reasonably achievable, and, in any case, for at least 200 years" [40 CFR 192, Subpart A, 192.02(a)], there is no termination of the general license for DOE's long-term custody of these sites [10 CFR 40.27(b)].

An LTSP is a requirement of the general license. When DOE determines that revision of the LTSP is necessary, DOE will notify NRC. Changes to the LTSP may not conflict with the requirements of the general license (Section 3.2).

In addition, DOE must guarantee NRC permanent right-of-entry to the site so that NRC may conduct site inspections. The Canonsburg site abuts Strabane Avenue, a public right-of-way.

3.2 Requirements of the General License

Requirements of the general license are at 10 CFR 40.27 and 10 CFR 40, Appendix A, Criterion 12. The requirements of the general license and the sections in this LTSP where each requirement is addressed are listed in Table 3-1.

Table 3-1. Requirements of the General License and DOE Implementation

Requirement	This Revised LTSP
1. Annual site inspection	Section 3.3
2. Annual inspection report	Section 3.3.5
3. Follow-up inspections and follow-up inspection reports, as necessary	Section 3.4
4. Site maintenance, as necessary	Section 3.5
5. Emergency measures in the event of catastrophe	Section 3.6
6. Environmental monitoring, if required	Section 3.7

3.3 Annual Site Inspection

3.3.1 Frequency of Inspection

At a minimum, sites must be inspected annually to confirm the integrity of visible features at the site and to determine the need, if any, for maintenance, additional inspections, or monitoring (10 CFR 40, Appendix A, Criterion 12).

DOE will inspect the Canonsburg site once each calendar year. The date of the inspection may vary from year to year, but DOE will endeavor to inspect the site once every 12 months unless circumstances warrant variance. The variance will be explained in the inspection report. DOE will notify NRC of the annual inspection at least 30 days in advance of the annual inspection.

3.3.2 Inspection Procedure

To ensure a thorough and uniform inspection, the site is divided into areas called transects. Transects for the inspection of the Canonsburg site are listed in Table 3-2 and shown on Figure 3-1.

Table 3-2. Transects Used during Inspection of the Canonsburg, Pennsylvania, Disposal Site

Transect	Description
Disposal cell	Surface of the disposal cell. Grass-covered.
Area adjacent to the disposal cell	Grass-covered and partially wooded area between the disposal cell and the security fence.
Diversion channels and perimeter ditch	Rock-armored channels that divert runoff to prevent erosion. Includes outflow areas at the mouth of the channels.
Site perimeter and security fence	Area between the security fence and the site boundary, including the security fence, boundary and survey monuments, entrance and perimeter warning signs.
Outlying areas	Area within 0.25 mile of the site boundary, including the former Area C.

Each transect is visually inspected during a walk-over. Within each transect, inspectors examine specific site surveillance features, such as monitor wells, survey and boundary monuments, signs, site markers, and erosion control markers. These features are listed on the Site Inspection Checklist (Section 3.3.3 and Appendix C).

Inspectors also examine each transect for the success of previous maintenance and for erosion, settling, slumping, plant or animal encroachment, human intrusion or vandalism, and other activity or phenomenon that might affect the safety, integrity, long-term performance, or institutional control of the site.

Inspectors may use photographs to support or supplement written observations.

Inspectors will note changes within 0.25 mile of the site. Changes in the outlying area that might be significant include new development, changes in land use, improvements or adjustments along the railroad right-of-way, and changes along the bank of the creek upstream, downstream, and adjacent to the site.

When inspecting the outlying area transect, inspectors will note development within former Area C, and will evaluate the owner's compliance with deed restrictions (Section 2.3.4).

3.3.3 Inspection Checklist and Map

Inspectors are briefed, and the inspection checklist is reviewed before the annual inspection. A sample checklist is provided in Appendix C. The checklist includes;

- Specific site surveillance features to be inspected;
- Routine observations to be made; and
- Special issues or problems to be evaluated.

The checklist is reviewed annually and revised as necessary to reflect changing site conditions.

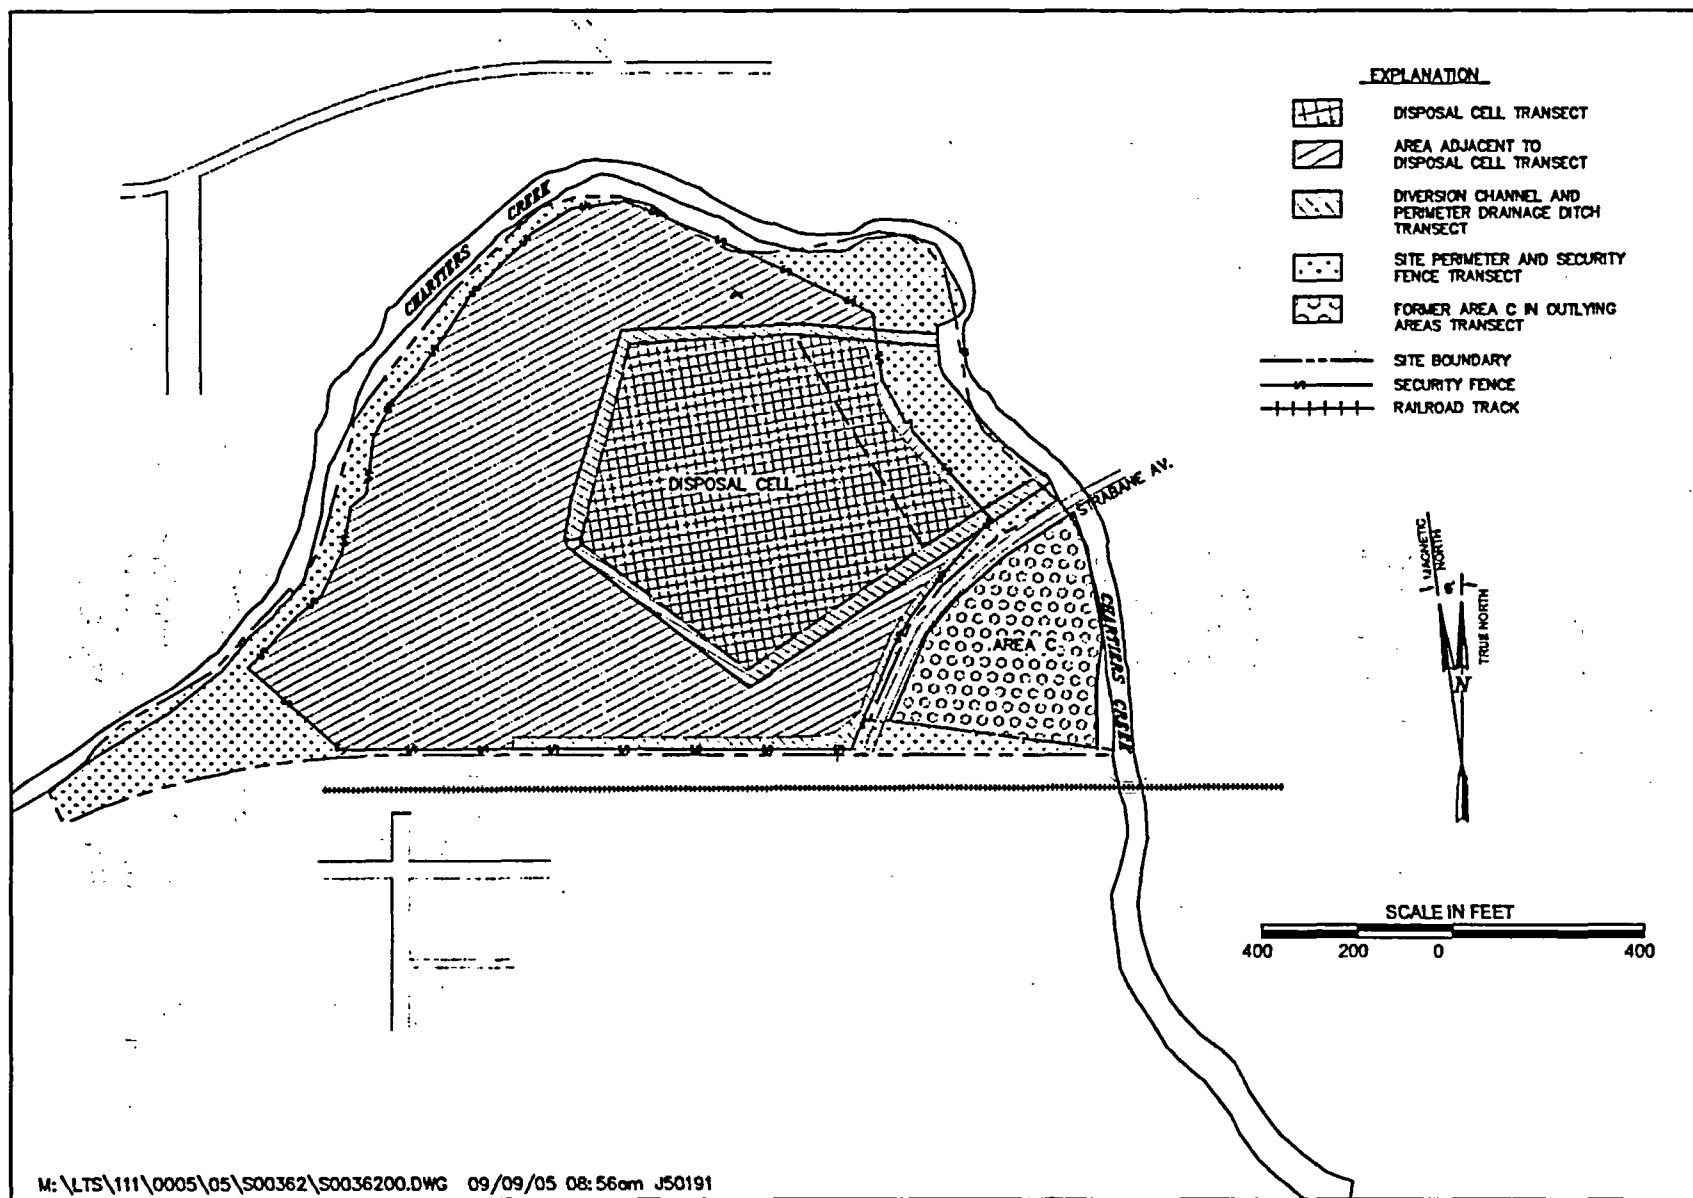


Figure 3-1. Canonsburg, Pennsylvania, Disposal Site, Inspection Transects

Inspectors also will carry site inspection maps. The base map, represented by Figure 2-2, will be annotated to reflect recent observations, issues, and photograph locations. Inspectors will annotate the map, sign and date it, and submit it to the inspection case file. Map information will be processed for inclusion in the inspection report and will constitute the basis for the following year's inspection map.

3.3.4 Personnel

Typically, two inspectors will perform annual inspections. Inspectors will be experienced engineers or scientists who have the required knowledge, skills, and abilities to evaluate site conditions and recognize imminent or actual problems.

Inspectors will be assigned for a given inspection of the Canonsburg site on the basis of the site conditions and inspector expertise. Areas of expertise include civil, geotechnical, and geological engineering; geology, hydrology, biology, and environmental science (e.g., ecology, soils, or range management). If conditions warrant, more than two inspectors may be assigned to the inspection to evaluate serious or unusual problems and make appropriate recommendations.

3.3.5 Annual Inspection Report

Results of the annual inspection will be reported to NRC within 90 days of the last UMTRCA Title I site inspection in the calendar year (10 CFR 40, Appendix A, Criterion 12). In the event that the report cannot be submitted in accordance with 10 CFR 40, DOE will notify NRC. Annual reports are available to the public and other agencies.

3.4 Follow-Up Inspections

Follow-up inspections are in response to significantly new or changed conditions at the site.

3.4.1 Criteria for Follow-Up Inspections

Requirements for the establishment of criteria for follow-up inspections are at 10 CFR 40.27(b)(4). DOE will conduct a follow-up inspection when:

- A condition is identified during the annual inspection (or other site visit) that requires personnel, perhaps with special expertise, to return to the site to evaluate the condition; or
- DOE is notified by a citizen or outside agency that conditions at the site are substantially changed.

DOE may request the assistance of local agencies to confirm the seriousness of a condition before conducting a follow-up inspection or emergency response (Section 3.6.3).

The public may use the 24-hour DOE telephone number posted prominently on the entrance sign to request information or to report a problem at the site (Section 2.3.5). DOE can be reached anytime at 970-248-6070 or toll free at 877-695-5322.

Once a new or changed condition is identified, DOE will evaluate the information and determine whether a follow-up inspection is warranted. Conditions that may require a routine follow-up inspection include changes in vegetation, erosion, storm damage, deliberate human intrusion, minor vandalism, or the need to evaluate, design, or perform certain maintenance projects.

Conditions that threaten the safety of the site or the integrity of the disposal cell may require a more urgent follow-up inspection or emergency response. Slope failure, disastrous storm, major seismic event, and deliberate human intrusion are among these conditions.

DOE will use a graded approach with respect to follow-up inspections. Urgency will be proportional to the potential seriousness of the condition. For example, a follow-up inspection to investigate or control vegetation may be postponed until a particular time during the growing season. A follow-up inspection to evaluate erosion may be scheduled to avoid snow cover.

In the event of "unusual damage or disruption" (10 CFR 40, Appendix A, Criterion 12), damage that may compromise or threaten the safety, security, or integrity of the site, DOE will

- Notify NRC pursuant to 10 CFR 40, Appendix A, Criterion 12, or 10 CFR 40.60, whichever applies;
- Begin DOE's internal occurrence notification process (DOE Order 232.1A);
- Respond with an immediate follow-up inspection or deployment of an emergency response team;
- Implement emergency measures, as necessary, to prevent or contain exposure or dispersal of radioactive materials (Section 3.6).

3.4.2 Personnel

DOE will assign inspectors to follow-up inspections on the same basis as the annual site inspection (see Section 3.3.4).

3.4.3 Reports

Results of routine follow-up inspections will be included in the annual inspection report to NRC (Section 3.3.5). Separate reports will not be issued unless DOE determines that it is advisable to notify NRC and other agencies of a potentially serious problem at the site.

If follow-up inspections are required for more urgent reasons, DOE will submit a preliminary report of the follow-up inspection to NRC within the 60-day period required by 10 CFR 40, Appendix A, Criterion 12.

3.5 Site Maintenance

Sites remediated under UMTRCA are designed and constructed so that "ongoing active maintenance is not necessary to preserve isolation" of radioactive material (10 CFR 40, Appendix A, Criterion 12). Nevertheless, routine maintenance requirements are established for the Canonsburg disposal site and for the bank of Chartiers Creek along the northern site boundary and eastern edge of Area C.

3.5.1 Routine Maintenance

DOE will conduct routine maintenance at the Canonsburg site to preserve the proper functioning of built features and demonstrate that the site is well cared for.

Vegetation—Vegetation management comprises (1) efforts to prevent trees and shrubs from establishing on the disposal cell and in the rock-lined diversion channels and perimeter drainage ditch, and (2) management of grass to prevent erosion.

Trees and shrubs growing in the diversion channels and perimeter drainage ditch are a concern because, with time, these plants and fallen leaves and branches they trap will choke the channels and ditch. This could reduce the capacity of these features to convey storm water safely off site without overflowing and causing erosion. To prevent loss of capacity, trees and shrubs in the channels and ditch are treated with herbicide, and dead plant material is removed every 2 to 3 years or as necessary.

Grass on the disposal cell and in the area surrounding the disposal cell serves two purposes—erosion protection and control of water infiltration through evapotranspiration. The grass gives the site aesthetic appeal with an open, park-like aspect in an otherwise urban setting. Grass is mowed annually in mid-summer. Mowing effectively prevents trees and shrubs from establishing on the disposal cell. Grass cuttings are mulched during mowing so that fertilization of the grass is not required.

DOE clears vegetation from along the security fence to prevent damage from entwining vegetation and provide access for inspection and maintenance. This clearing also enhances site security by removing vegetation that might provide a means of scaling the fence.

Although not required by the general license, control of noxious and invasive weeds may be required from time to time to meet local, county, and state requirements. Control is usually achieved by additional mowing(s) and application of selected herbicides.

Security Fence—DOE has found that the chain link security fence requires frequent maintenance to repair damage caused by falling limbs. Inspectors, samplers, and other site visitors will conduct limited, minor limb removal. DOE uses grounds keeping subcontractors to perform more significant clearing of vegetation.

In the humid Canonsburg climate, the security fence corrodes and will require periodic replacement. On the original portions of the fence, the barbed wire is brittle, the chain link fabric is rusted but functional, and the posts and top rails have some corrosion but remain serviceable. The service life of the security fence is expected to be 20 to 30 years but components such as the barbed wire will likely require replacement that is more frequent. Frequent lock replacement is required. Approximately 400 linear feet of fence was replaced in 2005 while repairing hurricane damage. DOE will maintain the site fence in good repair to control access.

A portion of the site was regraded after the security fence was installed, probably in response to placing the VPLM. A swale was cut to the north side of the site, which exposed the concrete boot on several fence posts. This is not an indication of erosion or subsidence. The fence posts are secure and do not require maintenance until such time as they become unstable or damaged.

Signs—Entrance and perimeter signs fade and are subject to corrosion and vandalism. DOE will maintain legible postings in good repair. Inspectors will carry replacement signs.

Markers and Monuments—These features are durable and not expected to require maintenance. Monuments may be lost to erosion or accident, at which time DOE will determine if the particular feature should be replaced.

3.5.2 Bank of Chartiers Creek

Disposal Site—During the site licensing process, there was concern that flooding along Chartiers Creek (from a rare storm or PMP) could, hypothetically, threaten the disposal cell and the VPLM disposal area. DOE considers the risk posed by flooding very small for several reasons.

Inspectors have formally inspected the Canonsburg site annually since 1990. During these inspections, inspectors have noted that the bank along the upstream reach of the creek is stable and heavily wooded with mature trees and dense understory. Competent sandstone of the Casselman Formation crops out where the bank is steepest. The rock and vegetation provide natural erosion protection and have survived high water in the past without significant effect.

In 2004, flood waters triggered by a hurricane left the Chartiers Creek channel near perimeter sign P-6, crossed the floodplain portion of the site and Strabane Avenue, and reentered the creek channel downstream of the Strabane Avenue bridge. This was roughly a 100-year flood. A large tree was dislodged between perimeter signs P7 and P8 and the fence was damaged. DOE moved the fence away from the top of the bank in 2005. Bank erosion occurred along Area C and DOE hardened the bank with riprap in 2005. No other damage occurred.

Along the downstream reach of the creek adjacent to the disposal site, the bank decreases in height and broadens into a low-lying floodplain covered with grass and brushy stream bank vegetation. Minor erosion occurred in this area in 1997. However, erosion along this reach of the creek is part of the natural cut-and-fill adjustments that constantly occur along the banks of the creek. These minor adjustments are neither significant nor credible threats to the disposal cell or the VPLM because they are far removed (more than 80 ft) from the buried riprap wall that is designed, in any case, to protect the contaminated materials from erosion, even erosion from a rare PMP (Section 2.3.3).

Erosion at or near the VPLM disposal area is not likely because the VPLM is above the 500-year floodplain as determined by FEMA, and above the 1,000-year floodplain determined during design of the disposal site (Section 2.3.3).

DOE will continue to inspect and record changes along the stream bank. Inspectors will use (1) the security fence above the creek along the west and northwest boundary of the site and (2) the ECMs from ECM-2 and -2A downstream to the Strabane Avenue bridge as benchmarks for detection of significant erosion. (Significant erosion will be erosion that threatens to expose contaminated materials in the disposal cell, the VPLM area, or materials below the cleanup standard that may remain on site.)

Along the upstream reach of the creek, the security fence is along the top of the bank above the creek. As explained in Section 2.3.3, the bank, although steep, is stable, wooded with mature forest, and supported by competent bedrock. Erosion or slumping along this bank that could destabilize the fence will be obvious to inspectors and will constitute an action level for evaluation, intervention, or maintenance by DOE.

Three pairs of erosion control markers (ECM-2 and -2A; ECM-3 and -3A; and ECM-4 and -4A) were installed along the downstream reach of the creek where the high bank flattens and widens into a narrow floodplain. For each ECM pair, the marker that is closer to the disposal cell also marks the approximate location of the top of the buried riprap wall.

Area C—In 1992 inspectors began to observe progressive loss of stream bank along the eastern edge of Area C. The loss was attributed to loss of cohesion in the bank materials due to seepage and erosion from occasional high water in the creek. Erosion at Area C is no threat to the disposal site, but perhaps a concern because of two thorium anomalies in Area C (Figure 3-2).

During remedial action verification, two thorium anomalies were discovered beneath clean fill at depths of 6 to 8 ft. Ingrowth from thorium was not a consideration at the time the Canonsburg site was remediated, so the thorium anomalies were left in place. However, Ra-226 ingrowth will result in concentrations slightly exceeding the standard in 40 CFR 192 within 1,000 years. DOE does not consider erosion along the stream bank to be a threat to these anomalies because the closer of the anomalies is 220 ft from the bank where slumping has occurred. However, in 2000–2001, DOE intervened to stabilize the stream bank to preserve the value of the property, prevent exposure of the thorium anomalies and prevent sedimentation in the creek.

During the bank stabilization project, large-diameter rock was placed along the bottom of the bank to an elevation just above the normal high water line. Above the riprap and normal high water line, the bank was cut back and reconstructed in three layers. Each layer consisted of rock (for drainage) and geogrid fabric (to prevent slumping). The face of the reconstructed bank was protected with erosion control fabric and revegetated. The 2004 storm event caused erosion of portions of the vegetated stream bank. DOE armored the stream bank by replacing the eroded material with riprap in 2005.

With the sale of the property to a private party expected in 2005, deed restrictions accompanying that sale require the new and subsequent owners to maintain and, if necessary, repair the bank if erosion recurs (Section 2.3.4). DOE will continue to monitor the stability of the stream bank along Area C.

3.6 Intervention or Emergency Response

Intervention or emergency response is action DOE will take in response to “unusual damage or disruption” that threatens or compromises site safety, security, or integrity (10 CFR 40, Appendix A, Criterion 12).

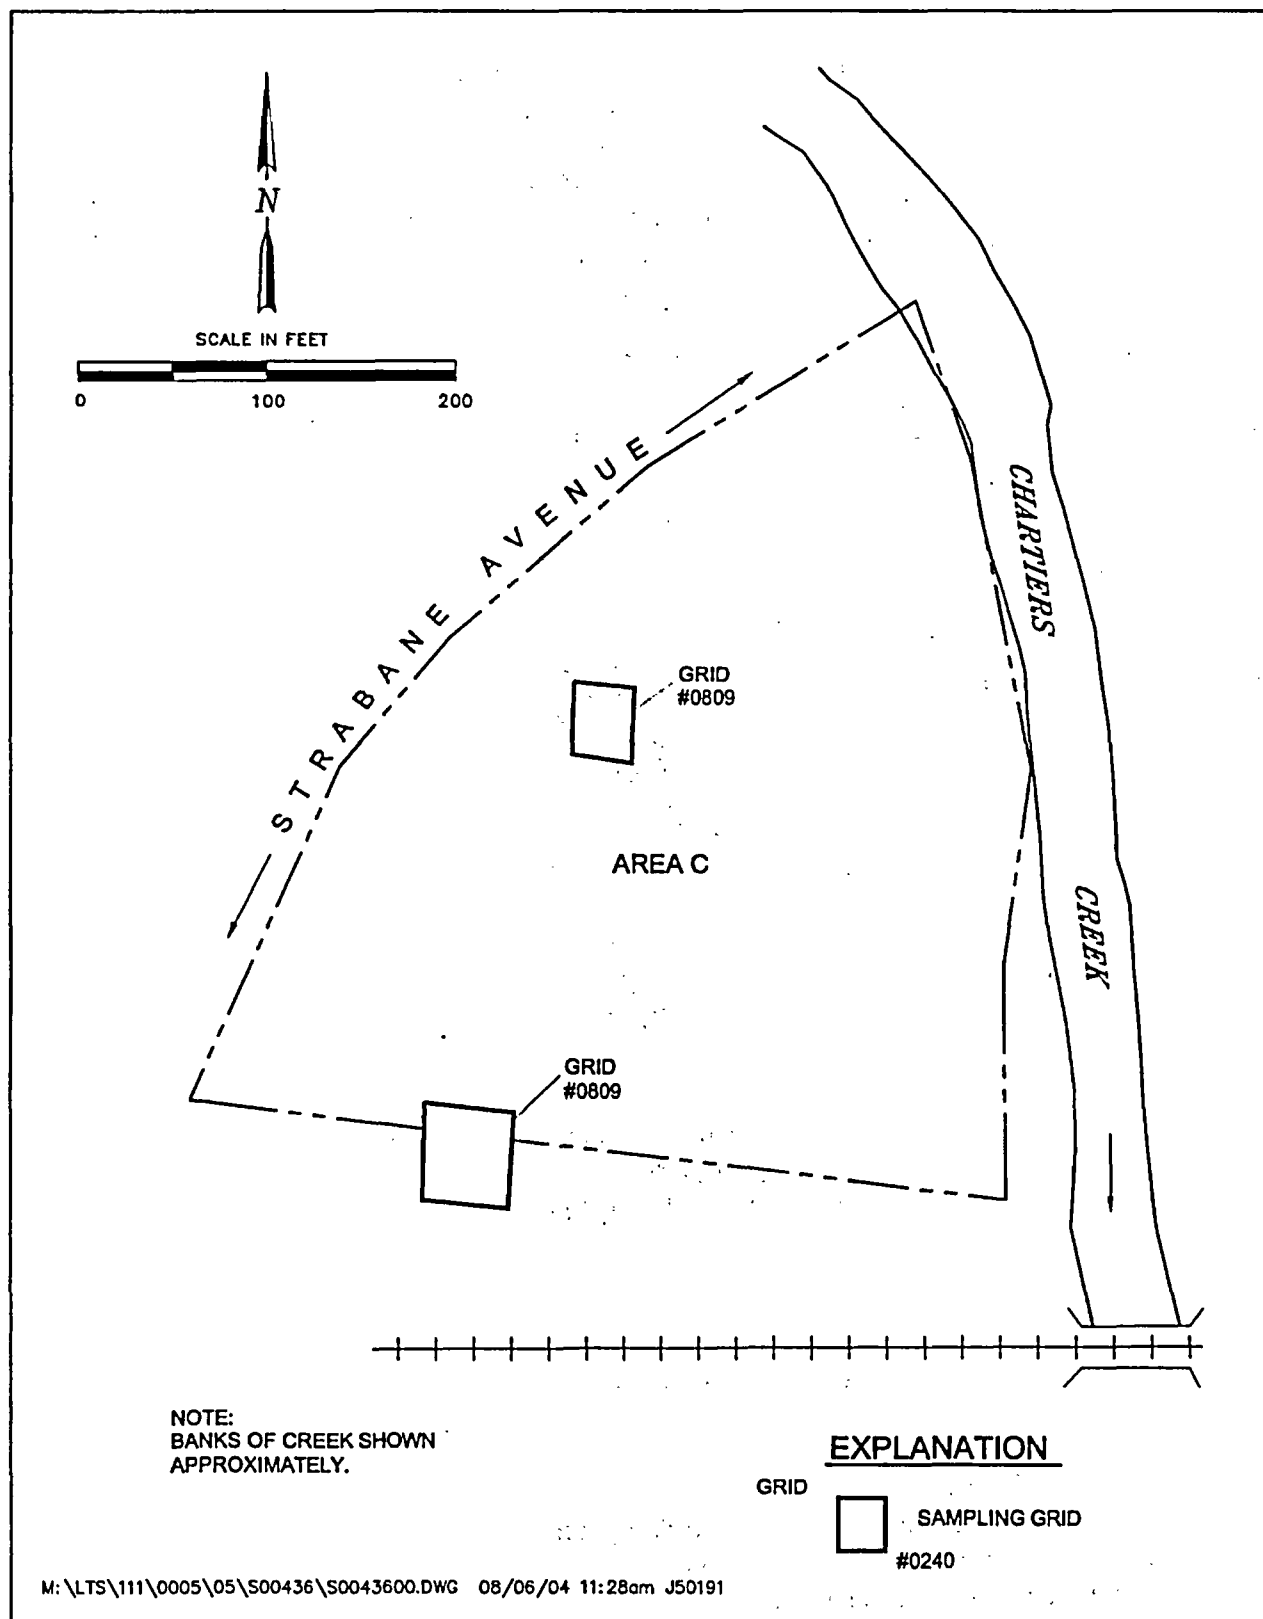


Figure 3-2. Location of Thorium-230 Anomalies, Area C, Canonsburg, Pennsylvania, Disposal Site

3.6.1 Criteria for Emergency Response

Conceptually, there is a continuum in the progression from small-scale, minor, routine maintenance (Section 3.3) to large-scale intervention that might include reconstruction of the disposal cell following an unlikely disaster. Although required by 10 CFR 40.27(b)(5), criteria for initiating specific responses to progressively more serious problems are not easily established because the nature and scale of potential problems is unforeseeable and highly scale dependent. The information in Table 3-3 is a guide to the actions DOE may take in response to increasingly serious problems.

Table 3-3. Criteria for Emergency Response

Priority ^a	Event	Example	DOE Response
1 Urgent	Breach of containment with dispersal of contaminated materials.	Side slope of disposal cell fails, radioactive materials are dispersed.	1. Notify NRC. 2. Conduct immediate follow-up inspection by DOE emergency response team. 3. Recover radioactive materials. 4. Repair side slope.
2	Breach of containment without dispersal of contaminated materials.	Side slope of disposal cell fails, or failure is imminent. Radioactive materials are not dispersed.	1. Notify NRC. 2. Conduct immediate follow-up inspection by DOE emergency response team. 3. Repair side slope.
3	Breach of site security with or without excavation or removal of materials.	Deliberate human intrusion or significant vandalism.	Restore security. Harden security as necessary.
4	Erosion along Chartiers Creek.	Loss of bank or relocation of channel.	Stabilize bank.
5 Routine	Minor problems, small-scale changes.	Minor vandalism, small-scale changes along creek bank, undesirable changes in vegetation.	Routine maintenance.

^aPriority highly dependent upon scale and on-site evaluation.

The table shows that the difference between routine maintenance and various emergency responses is primarily one of risk or urgency. Priorities listed in the table are inversely related to the probability of the problem occurring. The highest priority responses are the least likely to be required.

3.6.2 Notification

In accordance with 10 CFR 40.60, DOE will notify

Fuel Cycle Facilities Branch
Division of Fuel Cycle Safety and Security
Office of Nuclear Material Safety and Safeguards
U.S. Nuclear Regulatory Commission
Telephone number: (301) 816-5100

within 4 hours of discovery of a Priority 1 or 2 (or similar) event (Table 3-3).

3.6.3 Procedure for Intervention or Emergency Response

If a Priority 1 or 2 event occurs, DOE will assess the damage and decide whether evaluation of the problem is required or if immediate intervention (additional remedial action) is essential. This decision will be based on DOE's evaluation of the adequacy of the damaged feature to perform its intended function. For example, if one of the outer markers in an ECM pair is lost to erosion, as occurred at ECM-4A in 1997, DOE will note this event in its annual report to NRC and in the inspection checklist for the next annual inspection. If it becomes apparent that the second or innermost ECM in the pair or the fence is threatened by erosion, this issue may constitute an action level for evaluation, intervention, or maintenance by DOE.

To make the decision regarding appropriate action to take, DOE will evaluate the following. The evaluation may include assessment of risk.

1. Adequacy of the design specifications for the damaged feature to control or accommodate the observed problem.
2. Extent of the damage, degradation, or departure from the design (or as-built condition) of the damaged feature.
3. Ability of the feature, in its damaged condition, to withstand a design-basis event.

DOE will provide NRC with a clear, technical explanation for its decision to study and evaluate or intervene with additional remedial action (DOE 2001b).

3.7 Environmental Monitoring

Ground water and surface water monitoring is the only environmental monitoring required at the Canonsburg site. Monitoring requirements described in the original LTSP were based on surface remedial action under Subpart A of 40 CFR 192 and were approved as part of the NRC general licensing process for the site (DOE 1995b).

Additional monitoring requirements were described in the Ground Water Compliance Action Plan (GCAP) (DOE 2000) for the ground water cleanup phase of remedial action under Subpart B of 40 CFR 192.

This revised LTSP combines both requirements into a comprehensive sitewide monitoring program.

3.7.1 Water Quality Monitoring Under the Original Long-Term Surveillance Plan

EPA ground water protection standards require implementation of a ground water monitoring plan to evaluate disposal cell performance (40 CFR 192.03). However, remedial action at the Canonsburg site was completed in 1985, at the time that a federal court remanded the EPA ground water standards. Following the remand, NRC concluded that modification of the existing Canonsburg disposal cell was not warranted to meet revised ground water standards because the design of the disposal cell was adequate to provide long-term protection of human health and the environment.

The original LTSP (DOE 1995b) specified annual monitoring of ground water and surface water, as a best management practice (BMP), for a period of 2 years following licensing of the site. Because the site was included under the general license in 1996, DOE took that year as the first year of the 2-year monitoring period. The 2-year period was fulfilled by monitoring in 1996 and 1997. The purpose of monitoring was to (1) evaluate trends of two potential contaminants (uranium and molybdenum) within the unconsolidated materials (uppermost aquifer) that underlie the disposal site and (2) ensure the protection of public health, safety, and the environment.

The monitoring network included six monitor wells and three surface water locations in Chartiers Creek (Table 3-4 and Figure 2-5). Sample analyses consisted of standard water quality indicators, field measurements, and two specific analytes (uranium and molybdenum) (Table 3-5). Water levels in each monitor well were also measured. Sampling was in the fall each year in order to sample surface water in the creek during the period of lowest flow when contaminant concentration would be highest.

DOE continued to monitor ground water and surface water at the site annually beyond the required 2-year period, as a BMP, because of elevated uranium levels at some of the monitor wells and because it was anticipated that monitoring under the GCAP would include some of the same sampling locations. Continued sampling would acquire data to show trends in contaminant concentrations over time.

Table 3-4. Ground Water and Surface Water Sampling Locations at the Canonsburg, Pennsylvania, Disposal Site

Sample Locations Original LTSP (DOE 1995b)	Sample Locations GCAP (DOE 2000)	Sample Locations Revised LTSP
Monitor wells: MW-0410 Upgradient MW-0406 Downgradient ^a MW-0412 Downgradient MW-0413 Downgradient MW-0424 Downgradient MW-0414 Crossgradient ^b Surface water locations: SW-0601 Upstream SW-0602 Adjacent to Area C SW-0603 Downstream	Monitor wells: MW-0406 Downgradient MW-0412 Downgradient (POC) MW-0413 Downgradient (POC) MW-0414 Crossgradient (POC) Surface water location: SW-0602 Adjacent to Area C	Monitor wells: MW-0406 Downgradient (BMP) MW-0412 Downgradient (POC) MW-0413 Downgradient (POC) MW-0414 Crossgradient (POC) MW-0424 Downgradient (BMP) Surface water location: SW-0602 Adjacent to Area C (POE)

^aMW-0406 was destroyed during a sanitary sewer construction project in 2001 and replaced. The current designation is MW-0406A.

^bMW-0414 has been replaced twice because of damage during construction. The current designation is MW-0414B.

BMP = best management practice

POC = point of compliance

POE = point of exposure

*Table 3-5. Analytes For Surface Water and Ground Water at the
Canonsburg, Pennsylvania, Disposal Site*

Field Measurements	Original LTSP		GCAP	Revised LTSP
	Water-Quality Indicators	Specific Analytes	Specific Analytes	All Analytes
Alkalinity Dissolved oxygen pH Specific conductance Temperature Turbidity	Calcium Chloride Magnesium Potassium Sodium Sulfate	Uranium Manganese Molybdenum	Uranium Manganese Molybdenum	Uranium

3.7.2 Water Quality Monitoring Under the Ground Water Compliance Action Plan

The compliance strategy for ground water cleanup at the Canonsburg site is no further remediation in conjunction with the application of an ACL for uranium, the only remaining constituent of concern for the site (DOE 2000). In addition to ground water monitoring, the compliance strategy includes institutional controls to ensure that the application of the ACL will continue to protect public health and the environment. Historical data and computer modeling predict that natural ground water movement (flushing) and geochemical attenuation processes will reduce uranium concentrations in ground water to concentrations less than the MCL within 30 years (DOE 2000).

The ACL for uranium is 1.0 mg/L at the point of compliance (POC) wells (MW-0412, MW-0413, and MW-0414). The GCAP establishes a limit of 0.01 mg/L at the point of exposure (POE) in Chartiers Creek (surface water location SW-0602). (The EPA MCL for uranium is 0.044 mg/L [40 CFR 192, Subpart A, Table 1].)

The monitoring network includes four monitor wells and one surface water location in Chartiers Creek (Table 3-4 and Figure 2-5). Sample analyses consists of standard water quality indicators, field measurements, and three specific analytes (uranium, molybdenum, and manganese) (Table 3-5). Water levels in each monitor well will also be measured. Sampling is conducted in the fall of the year on an annual basis. Monitoring will be conducted under the GCAP to demonstrate that the ACL for uranium is not exceeded at either the POC wells or at the POE in Chartiers Creek. Monitoring results will be used to evaluate the progress of uranium flushing and attenuation in ground water.

3.7.3 Revised Comprehensive Sitewide Water Quality Monitoring Program

This revised LTSP combines the objectives of both the original LTSP (DOE 1995b) and the GCAP (DOE 2000) into a comprehensive sitewide monitoring program. This program will involve sampling three POC wells, two BMP wells, and one surface water location (POE) in Chartiers Creek (Table 3-4, Column 3; and Figure 2-5).

Background levels for uranium at the upgradient (background) well, MW-0410, have been consistently at or below the detection limit, and no changes are expected in the quality of ground water migrating onto the site. Thus, there is no need to continue monitoring this location. Uranium in surface water samples at all three sampling locations in Chartiers Creek has been continually at or below detection limit. Therefore, monitoring at the POE is the only surface water sampling that can be justified.

The objectives of the monitoring program will be to (1) evaluate downgradient contaminant trends in ground water in the shallow unconsolidated materials and in surface water, (2) demonstrate that concentrations of uranium at POC locations are decreasing as predicted and that the system remains in compliance with the GCAP, and (3) ensure that remedial actions at the disposal site and Area C continue to protect human health, safety, and the environment.

Routine field measurements will continue to be collected. However, water quality indicators are no longer required for long-term monitoring. Uranium is the only remaining constituent of concern for the site. In 2003, NRC concurred that ground water use restrictions could be deleted in Area C (NRC 2003). Even though the restrictions were removed, DOE will continue to monitor the two wells near Area C (MW-0414B and MW-0424) as both a BMP and in response to the NRC request.

The original GCAP indicated that monitoring would be conducted annually for 5 years beginning in 2000 and would be conducted, if necessary, for a maximum of 30 years (through 2029). The year 2000 was selected for the beginning of the comprehensive sitewide monitoring program because that is the year NRC concurred in the recommendations in the GCAP (NRC 2000). The plan indicated that the need to continue or change the frequency of monitoring would be evaluated after the first 5-year period. Based on review of those 5-year results, this revised LTSP recommends revising monitoring parameters to include only field measurements and uranium (Table 3-5). Monitoring is recommended to continue annually for the next 5 years (through 2010) and be reevaluated at that time. DOE could then implement changes in monitoring strategy or frequency, including termination of monitoring, in consultation with the State and with NRC concurrence.

3.7.4 Reports of Water Quality Monitoring

DOE will present results of ground water monitoring for uranium in annual reports to NRC (Section 3.3.5). Results of each 5-year evaluation may be in the annual report or reported separately.

3.8 Institutional Controls Monitoring

DOE will retain ownership of the disposal site in perpetuity. Through ownership, DOE will control land use. Inspectors will look for evidence of trespass and damage to fences and signs.

Institutional controls will be established for Area C through deed restrictions. These are defined in the sale agreement in Appendix B. The land use restrictions are binding on successive owners. DOE will monitor land use on Area C for conformance with institutional controls.

Specifically, inspectors will monitor Area C for

- Excavations that exceed depth limitations;
- Residential land use;
- Modification of or blocking access to the monitor well (MW-0424); and
- Modification of or allowing erosion to occur on the Chartiers Creek stream bank.

3.9 Records

DOE maintains records for the Canonsburg site at Grand Junction, Colorado, and at Federal Records Centers. These records contain information essential to the long-term care and custody of the site pursuant to applicable laws and regulations. These records include site characterization reports, remedial action plans, National Environmental Policy Act documents, engineering design and construction documents, as-built drawings, results of environmental monitoring, and annual inspection reports. Records are available for public inspection. Selected records are available online at <http://www.lm.doe.gov>.

Records for the Canonsburg site are maintained in compliance with DOE Order 200.1, *Information Management Program*, and 36 CFR 1220–1236, “National Archives and Records Administration.”

3.10 Quality Assurance

The long-term care of the Canonsburg site and all activities related to the annual surveillance, monitoring, and maintenance of the site comply with DOE Order 414.1B, *Quality Assurance*, and *Specifications and Guidelines for Quality Systems for Environmental Data Collection and Environmental Technology Programs* (ASQC 1994).

QA requirements are transmitted to subcontractors through procurement documents if and when appropriate.

3.11 Health and Safety

DOE activities are conducted in accordance with health and safety procedures established for DOE–LM and are consistent with DOE orders, regulations, codes, and standards.

Health and safety concerns specific to work at the Canonsburg site are in the *Office of Land and Site Management Project Safety Plan* (DOE 2004). This plan contains a list of emergency telephone numbers and addresses for local fire, hospital, ambulance, and police or sheriff agencies, as well as a map to the nearest emergency medical facility. Personnel are briefed on health and safety requirements before each annual inspection or other site visit. Inspectors, samplers, and other DOE personnel visiting the site will carry a copy of the project safety plan.

Maintenance subcontractors are advised of health and safety requirements through procurement documents. Subcontractors must submit health and safety plans for all activities subject to Occupational Safety and Health Administration requirements. Subcontractor health and safety plans and records are reviewed and approved before contracts are awarded.

End of current text

4.0 References

10 CFR 40.27. U.S. Nuclear Regulatory Commission, "General License for Custody and Long-Term Care of Residual Radioactive Material Disposal Sites," *Code of Federal Regulations*, January 1, 2004.

10 CFR 40. U.S. Nuclear Regulatory Commission, "Domestic Licensing of Source Material," Appendix A, Criterion 12, "Long-Term Surveillance," *Code of Federal Regulations*, January 1, 2004.

40 CFR 143. U.S. Environmental Protection Agency, "National Secondary Drinking Water Regulations," *Code of Federal Regulations*, July 1, 2004.

40 CFR 192. U.S. Environmental Protection Agency, "Health and Environmental Protection Standards for Uranium and Thorium Mill Tailings," *Code of Federal Regulations*, July 1, 2004.

Uranium Mill Tailings Radiation Control Act of 1978. Public Law 95-604, Title 42 *United States Code*, Chapter 88 Section 7901, et seq.

ASQC (American Society for Quality Control), 1994. *Specifications and Guidelines for Quality Systems for Environmental Data Collection and Environmental Technology Programs*, ANSI/ASQC E4-1994.

DOE Order 200.1. *Information Management Program*.

DOE Order 232.1A. *Occurrence Reporting and Processing of Operations Information*.

DOE Order 414.1B. *Quality Assurance*.

Hem, J.D., 1985. *Study and Interpretation of the Chemical Characteristics of Natural Water*, United States Geological Survey Water-Supply Paper 2254, 263 p.

Suter, G.W., II, and C.L. Tsao, 1996. *Toxicological Benchmarks for Screening Potential Contaminants of Concern for Effects on Aquatic Biota: 1996 Revision*, Lockheed Martin Energy Systems, Inc., ES/ER/TM-96/R2.

U.S. Department of Energy, 1983a. *Final Environmental Impact Statement: Remedial Actions at the Former Vitro Rare Metals Plant Site, Canonsburg, Washington County, Pennsylvania*, DOE/EIS-0096-F, Volume 1, Albuquerque Operations Office, Albuquerque, NM, July.

———, 1983b. *Remedial Action Plan for Stabilization of the Inactive Uranium Mill Tailings Site at Canonsburg, Pennsylvania*, UMTRA-DOE/AL-140, Albuquerque Operations Office, Albuquerque, NM, October.

———, 1995a. *Baseline Risk Assessment of Ground Water Contamination at the Uranium Mill Tailings Site Near Canonsburg, Pennsylvania*, DOE/AL62350-149, Rev. 1, Albuquerque Operations Office, Albuquerque, NM, November.

U.S. Department of Energy, 1995b. *Long-Term Surveillance Plan for the Canonsburg, Pennsylvania, Disposal Site*, DOE/AL/62350-203, Rev. 0, Albuquerque Operations Office, Albuquerque, NM, October.

———, 1999. *Annual Site Inspection and Monitoring Report for Uranium Mill Tailings Radiation Control Act Title I Disposal Sites for the Period January 1, 1998, Through December 31, 1998*, Grand Junction Office, February. Check for cites in text

———, 2000. *Ground Water Compliance Action Plan for the Canonsburg, Pennsylvania, UMTRA Project Site*. Grand Junction Office, Grand Junction, Colorado, February.

———, 2001a. *Design and Specifications for Buried Riprap Wall, Canonsburg, Pennsylvania, Disposal Site*, Albuquerque Operations Office, Drawing CAN-PS-10-0021, April 2001.

———, 2001b. *Guidance for Implementing the Long-Term Surveillance Program for UMTRCA Title I and Title II Disposal Sites*, Grand Junction Office, Grand Junction, Colorado, April.

———, 2004. *Office of Land and Site Management Project Safety Plan*, DOE-LM/GJ636-2004, Grand Junction Colorado, June.

U.S. Nuclear Regulatory Commission, 1995. "Concurrence on Certification Report for Canonsburg, Pennsylvania," letter from J. Holnich, U.S. Nuclear Regulatory Commission, to R. Sena, Albuquerque Operations Office, August 14.

———, 2000. "U.S. Nuclear Regulatory Commission Concurrence of the Ground Water Compliance Action Plan and Application for Alternate Concentration Limits for the Canonsburg, Pennsylvania, UMTRA Site," with attachment: *Technical Evaluation Report, Canonsburg Groundwater Compliance Action Plan and Alternate Concentration Limit Application*, letter from T.H. Essig, NRC, to D. Metzler, DOE, Washington, DC, January 24.

———, 2003. "Review of Request for NRC Approval to Authorize Deletion of Institutional Controls (Area C) at Canonsburg, Pennsylvania," with enclosed Technical Evaluation Report, letter from J. Holnich, NRC, to A. Kleinrath, DOE, Washington DC, April 28.

Appendix A

Regulator Concurrence Documentation



RECEIVED DOE

UNITED STATES
JAN 2 8 00 AM NUCLEAR REGULATORY COMMISSION

WASHINGTON, D.C. 20555-0001

GRAND JCT. PROJ. OFF. January 16, 1996

Mr. Richard Sena, Acting Director
Environmental Restoration Division
Uranium Mill Tailings Remedial Action
Project
U.S. Department of Energy
2155 Louisiana NE, Suite 4000
Albuquerque, NM 87110

SUBJECT: ACCEPTANCE OF THE LONG-TERM SURVEILLANCE PLAN FOR THE CANONSBURG,
PENNSYLVANIA URANIUM MILL TAILINGS REMEDIAL ACTION PROJECT SITE

Dear Mr. Sena:

The U.S. Nuclear Regulatory Commission staff hereby accepts the U.S. Department of Energy's (DOE's) Long-Term Surveillance Plan (LTSP), dated October 1995, for the Canonsburg, Pennsylvania Uranium Mill Tailings Remedial Action Project site. This action establishes the Canonsburg site under the general license in 10 CFR Part 40.27.

The staff, based on its review, made a determination that all of the previously identified open issues have been adequately addressed in the October 1995 version of the LTSP for the Canonsburg site. However, the construction document referenced in Appendix E of the LTSP will need to be reviewed by the staff to ensure it meets objectives of the LTSP.

The LTSP satisfies the requirements set forth in the Uranium Mill Tailings Radiation Control Act of 1978 for long-term surveillance of a disposal site, and all requirements in 10 CFR Part 40.27 for an LTSP. In accordance with DOE's guidance document for long-term surveillance, all further NRC/DOE interaction on the long-term care of the Canonsburg site will be conducted with the DOE's Grand Junction Project Office. If you have any questions, please contact the NRC Project Manager, Mohammad Haque at (301) 415-6640.

Sincerely,

Joseph J. Holonich, Chief
High-Level Waste and
Uranium Recovery Projects Branch
Division of Waste Management
Office of Nuclear Material Safety
and Safeguards

cc: M. Abrams, DOE A1b
S. Hamp, DOE A1b
✓ J. Virgona, DOE GJPO
E. Artiglia, TAC A1b
J. Yusko, PA DEP

End of current text



**UNITED STATES
NUCLEAR REGULATORY COMMISSION**

WASHINGTON, D.C. 20555-0001

January 24, 2000

Mr. Donald R. Metzler
U.S. Department of Energy
Grand Junction Office
2597 B 3/4 Road
Grand Junction, CO 81503

**SUBJECT: U.S. NUCLEAR REGULATORY COMMISSION CONCURRENCE OF THE
GROUND WATER COMPLIANCE ACTION PLAN AND APPLICATION FOR
ALTERNATE CONCENTRATION LIMITS FOR THE CANONSBURG,
PENNSYLVANIA, UMTRA SITE**

Dear Mr. Metzler:

The U.S. Department of Energy (DOE) submitted a Groundwater Compliance Action Plan (GCAP) and Application for Alternate Concentration Limits (ACL) for the Canonsburg, Pennsylvania, UMTRA site in letters dated September 9, 1998, April 8, 1999, and September 27, 1999. A request for additional information was made from this office, and DOE satisfied our concerns in a submittal dated December 17, 1999. Our staff has reviewed this information and concurs with the Groundwater Compliance Action Plan and approves the application for alternate concentration levels.

The staff has determined that the GCAP for the Canonsburg, Pennsylvania site satisfies the requirements set forth in the Uranium Mill Tailings Radiation Control Act of 1978, as amended and the standards in 40 CFR 192, Subpart B for the cleanup of groundwater contamination resulting from the processing of ores for the extraction of uranium. The compliance strategy proposed in the GCAP will achieve compliance with Subpart B of 40 CFR 192.12 through no remediation in conjunction with the application of an ACL, including groundwater monitoring and institutional controls to ensure that the ACL will continue to be protective of human health and the environment.


The staff's Technical Evaluation Report has been enclosed for your information. DOE should revise the Long-Term Surveillance Plan to be consistent with the Groundwater Compliance Action Plan.

D. Metzler

2

Please feel free to contact the NRC Project Manager, Jill Caverly, at (301) 415-6699 should you have any questions regarding this matter.

Sincerely,

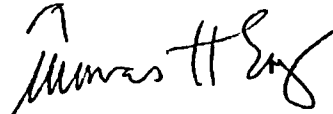

Thomas H. Essig, Chief
Uranium Recovery and
Low-Level Waste Branch
Division of Waste Management
Office of Nuclear Material Safety
and Safeguards

Enclosure: Technical Evaluation Report

cc: James G. Yusko, Pennsylvania
Department of Environmental
Protection

ENCLOSURE

**TECHNICAL EVALUATION REPORT
CANONSBURG GROUNDWATER COMPLIANCE ACTION PLAN AND
ALTERNATE CONCENTRATION LIMIT APPLICATION**

DATE: December 30, 1999

FACILITY: Canonsburg, PA

PROJECT MANAGER: Jill Caverly

TECHNICAL REVIEWER: William von Till

SUMMARY AND CONCLUSIONS:

The U.S. Department of Energy (DOE) submitted a Groundwater Compliance Action Plan (GCAP) and Application for Alternate Concentration Limits (ACLs) for the Canonsburg, Pennsylvania, UMTRA Project Site by cover letter dated September 9, 1998. U.S. Nuclear Regulatory Commission (NRC) staff reviewed the GCAP and provided preliminary comments to DOE in a conference call on August 17, 1999. DOE, by letter dated September 27, 1999, responded to the comments. NRC reviewed all relevant material and by letter dated October 13, 1999, requested additional information. DOE, by letter dated December 17, 1999, provided a response and revised Section 3.0 of the GCAP.

After review of the documents, the staff concurs with the proposed action. The compliance strategy proposed in the GCAP will achieve compliance with Subpart B of 40 CFR 192.12 through no remediation in conjunction with the application of an ACL, including groundwater monitoring and institutional controls to ensure that the ACL will continue to be protective of human health and the environment. Staff has determined that the GCAP for the Canonsburg, Pennsylvania, site satisfies the requirements set forth in the Uranium Mill Tailings Radiation Control Act of 1978, as amended (UMTRCA), and the standards in 40 CFR 192, Subpart B for the cleanup of groundwater contamination resulting from the processing of ores for the extraction of uranium.

The option of no remediation in conjunction with the application of ACLs for the uppermost aquifer is acceptable based on the following:

- 1) Constituents will not pose a risk to human health and the environment due to the use of institutional controls to prohibit groundwater use on the site during the ACL application period. Groundwater contamination discharging into the stream adjacent to DOE-controlled land will be diluted to well below harmful concentrations, and DOE and the State of Pennsylvania has control over the land from the tailings to the stream.
- 2) Alternatives would not produce an incremental benefit over the associated costs.
- 3) Compliance monitoring will be used to verify the decrease in contaminant concentrations, as predicted by modeling, for a minimum of five years and up to 30 years with re-evaluation after five years. To assure that groundwater constituents do not

flow under Chartiers Creek and migrate towards water supply wells, DOE will include monitoring well 406 in the monitoring program.

BACKGROUND:

The NRC concurred on the Remedial Action Plan (RAP) on May 18, 1984, and concurred on two modifications on January 24 and 28, 1986. The staff also concurred on the Remedial Action Inspection Plan on December, 1985. This concurrence was the staff's agreement that the Quality Control Program was acceptable.

DOE submitted a final Completion Report for surface remediation by letter dated April 7, 1994. The staff concurred on the action by letter dated August 14, 1995. The staff accepted DOE's Long-Term Surveillance Plan (LTSP), dated October 1995, by letter dated January 16, 1995.

This supplemental TER documents the staff's review of DOE's GCAP dated September 9, 1998. Canonsburg is one of three sites that were completed early in the program, and in accordance with the Memorandum of Understanding between the DOE and the NRC, dated November 6, 1990. The groundwater restoration phase of the Uranium Mill Tailings Remedial Action (UMTRA) project was initiated by DOE's final Programmatic Environmental Impact Statement (PEIS) for the UMTRA Ground Water Project. The final PEIS was approved for distribution on September 19, 1996, and the Record of Decision was approved and published on April 28, 1997.

Regulatory Framework:

The UMTRA Project regulations provide several ways to comply with the groundwater protection standards for Subpart B of 40 CFR Part 192.12(c). These include meeting the provisions of 40 CFR 192.02(c)(3) or a supplemental standard established under 40 CFR 192.21. Within 40 CFR 192.02(c)(3)(ii), the option for ACLs is established. ACLs are established on a site-specific basis, provided it is demonstrated that the constituents will not pose a substantial present or potential hazard to human health or the environment, as long as the ACLs are not exceeded.

The hazard assessments for ACLs will be acceptable if they meet the following criteria:

- 1) The point of exposure (POE) is identified.
- 2) The hazardous constituent source term and the extent of groundwater contamination are characterized.
- 3) The hazardous constituent transport in groundwater, and hydraulically connected surface water, and the adverse effects on water quality, including the present and potential health and environmental hazards, are assessed.
- 4) An assessment of human or environment exposures to hazardous constituents, including the cancer risk and other health and environmental hazards, is provided.
- 5) An evaluation of potential alternatives is provided.


Factors used in evaluating the ACL application can be found in Appendix 1 of this report as outlined in 40 CFR Part 192.02(c)(3)(ii)(B)(1 and 2).

Site Description:


The DOE Canonsburg facility is located in the Borough of Canonsburg, in northern Washington County, Pennsylvania, approximately 20 miles (mi)(32 kilometers [km]) southwest of Pittsburgh, Pennsylvania (Figure 1). The site encompasses approximately 18.5 acres (7.4 hectares) and is adjacent to Chartiers Creek (Figure 2). The facility has been used to process or contain radioactive materials since 1911. Between 1984 and 1986, DOE conducted surface remediation by removing the buildings, contaminated soils, and materials from the site and stabilizing them in a permanent disposal cell. The disposal cell covers 6 acres (2.4 hectares) and contains about 172,000 cubic yards (132,000 cubic meters) of contaminated materials. The site is currently being monitored in accordance with the Long-Term Surveillance Plan (LTSP) for the Canonsburg, Pennsylvania Disposal Site (DOE, 1995).

Groundwater is present in the unconsolidated materials and in the shallow bedrock of the Casselman Formation. The unconsolidated materials are composed of sandy loam to silty clay, clay, alluvium, and fill material up to 30 feet (ft) (9 meters [m]) thick. The lithology of the bedrock to a depth of 90 ft (29 m) consists predominantly of gray siltstone and shale, some inter-bedded limestone, and sparse coal seams. The two units are hydraulically connected with a vertical flow component from the unconsolidated materials to the bedrock. Groundwater depth in the unconsolidated material ranges from 3 to 14 ft (0.9 to 4.3 m) below ground surface. Groundwater occurs in the shallow bedrock under semi-confined conditions mainly in zones of secondary porosity (fractures). The groundwater velocity from the disposal cell toward Chartiers Creek is estimated at approximately 4 ft per day (1.4×10^{-3} cm per second). Groundwater from the unconsolidated material discharges into Chartiers Creek that is directly down-gradient from the disposal cell. Chartiers Creek has an average flow of 90 to 130 ft³ per second (2.5 to 3.7 m³ per second) and flows into the Ohio River 15 mi (24 km) downstream from the site. Local residents use the creek for fishing, swimming, and wading. The types of fish found in the creek include carp, catfish, and bluegill. The creek has elevated levels of iron and manganese as a result of acid mine drainage in the area.

Most of the residents in the area are connected to a municipal water supply system supplied by the Monongahela River. A water use survey identified 16 wells within a 1 mi (1.6 km) radius of the site. Of these wells, one was in use, eleven were not in use, and four were abandoned. Seven of these wells are up-gradient of the site and would not be affected. The remaining five wells are located on the opposite side of Chartiers Creek, one of which is in use located approximately 400 ft (120 m) north of the site. This well is used only for washing cars, mixing cement, and watering the garden.

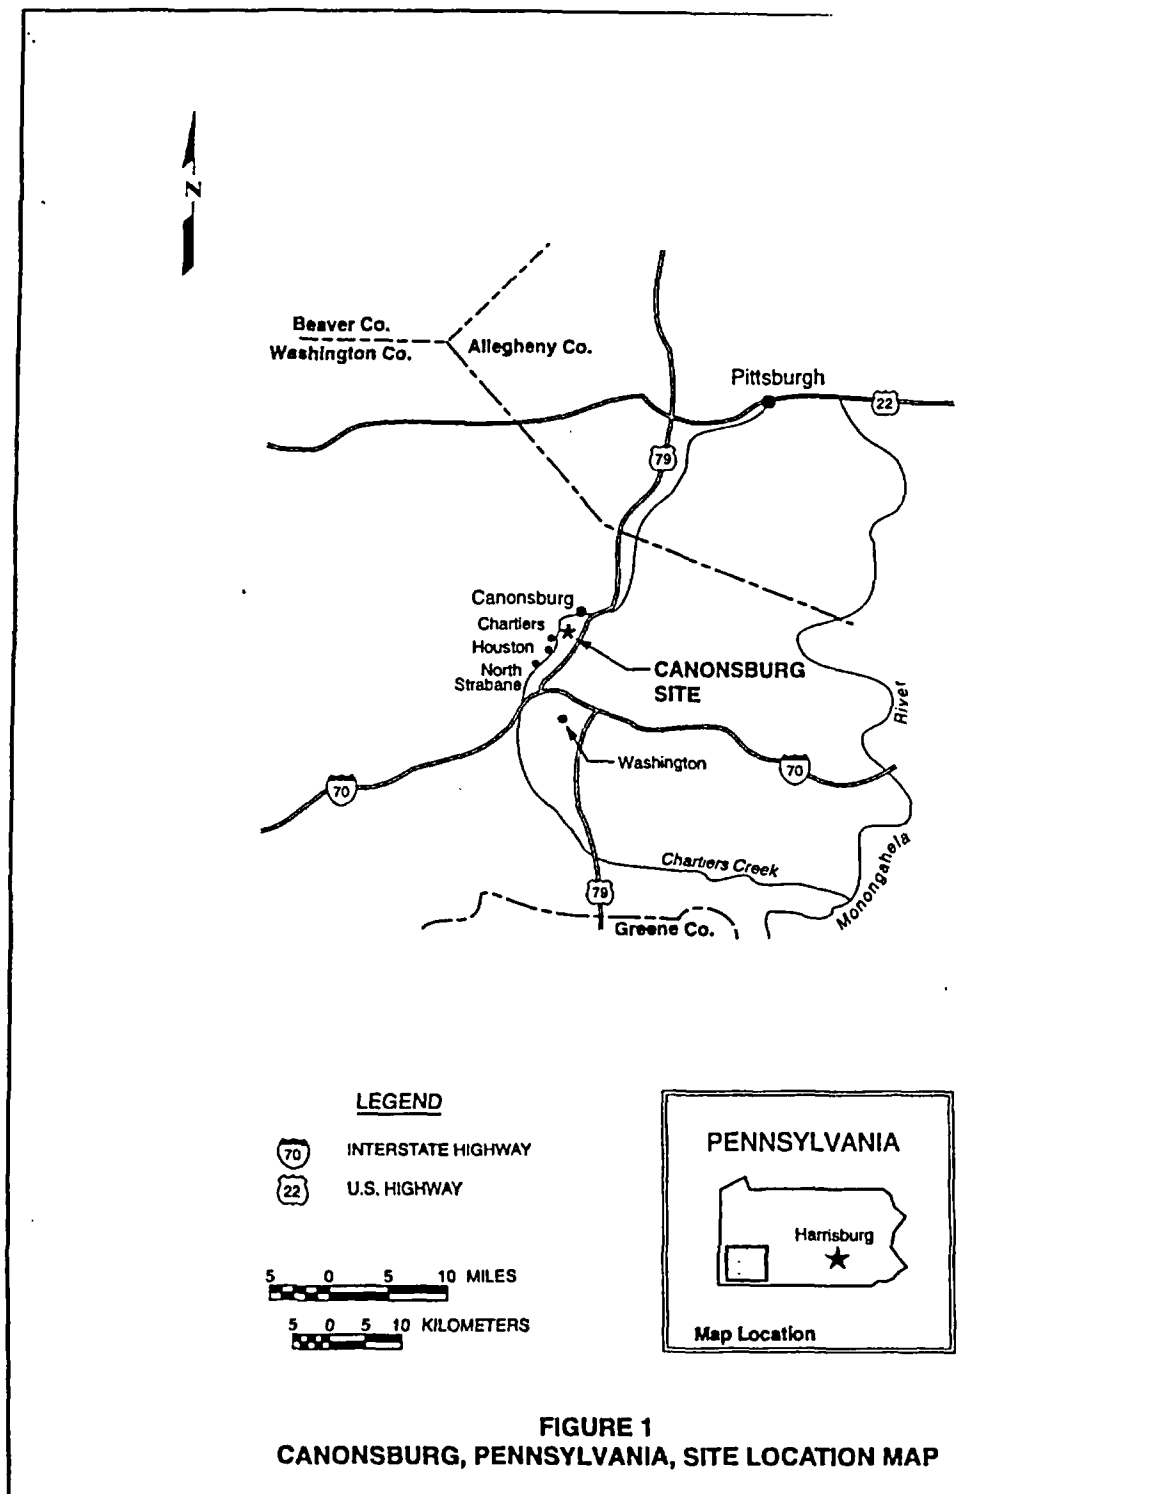

MAC: SITE/CAN/S&M/SITELOC

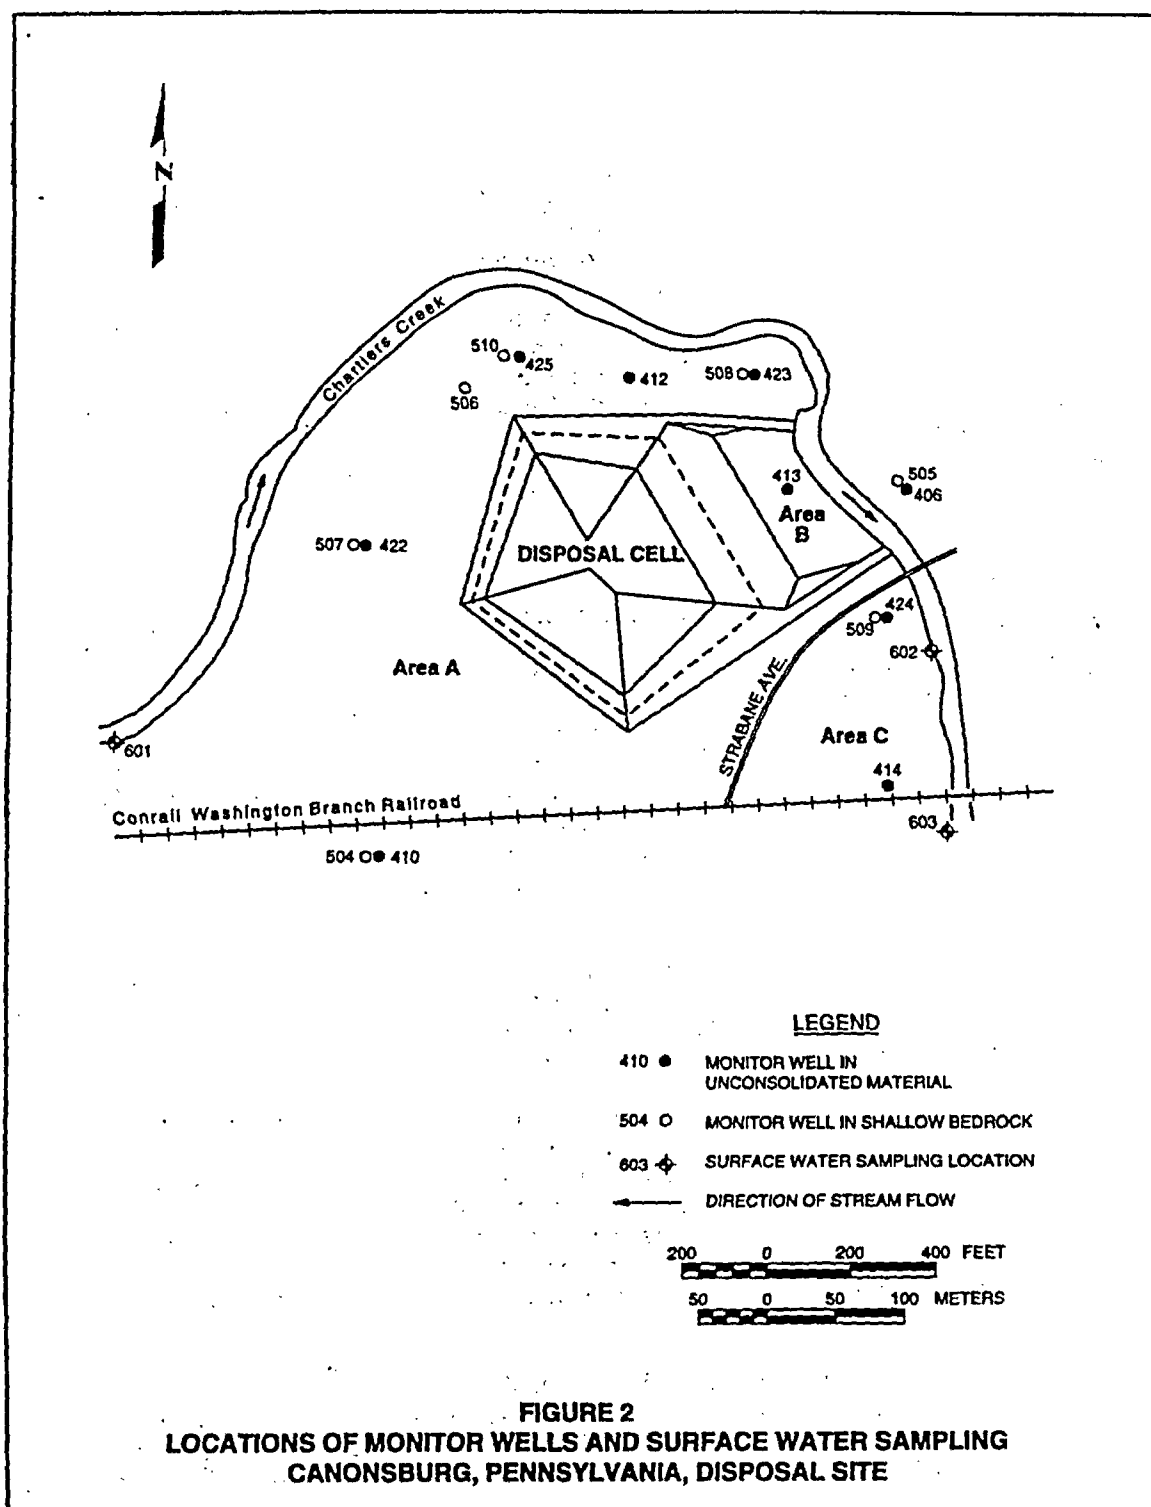

MAC: SITE/CAN/LTSP/SWSAMPLCS2

TECHNICAL EVALUATION:

DOE has proposed, based on the framework under the Programmatic Environmental Impact Statement for Uranium Mill Tailings Remedial Action Groundwater Project (PEIS)(DOE, 1996), no remediation in conjunction with the application of ACLs to groundwater contamination at the site. This will include incorporation of groundwater monitoring and institutional controls to ensure that the application of ACLs will continue to be protective of human health and the environment. The ACL will be established at a point of compliance (POC), which will consist of monitoring wells 412 and 413, down-gradient from the disposal cell, and monitoring well 414 in Area C. Monitoring well 406 will also be monitored to assure that migration of hazardous constituents under Chartiers Creek is limited. The point of exposure (POE) will be the surface water in Chartiers Creek adjacent to the site and monitoring well 602. DOE owns property from the POC wells to the Creek where groundwater discharges. Ground water constituents are currently flushing into the stream at levels that are below detection with the dilution of the stream.

Manganese, molybdenum, and uranium are the constituents of concern (COC) that have been present in concentrations that exceed MCLs or background in groundwater down-gradient from the disposal cell and in Area C. The proposed ACL for uranium is 1.0 mg/L. An ACL is not required for manganese because it does not have an MCL in Table 1 to Subpart A of 40 CFR 192, does not pose a threat to human health and the environment, and ambient manganese contamination in Chartiers Creek is present at the site. Institutional controls will ensure that the risks from groundwater ingestion of manganese are eliminated. Molybdenum concentrations have been exceeded historically at the site, but recent data indicates that concentrations are below the standard of 0.1 mg/l. The NRC requested that DOE monitor manganese and molybdenum, along with uranium, as part of the groundwater monitoring to make sure concentrations remain protective. DOE agreed to this in their September 27, 1999, correspondence.

Based on the Baseline Risk Assessment (BLRA) (DOE, 1995) no human health risks are currently associated with contaminated groundwater at the site other than potential ingestion of drinking water. Institutional controls will be in place to prevent any use of contaminated groundwater near the processing site and in Area C.

Numerical modeling estimates that there will be no future risk to human health and the environment and that the contaminants will be flushed in less than 30 years. Compliance monitoring will consist of annual monitoring for a period no less than 5 years and up to 30 years. Re-evaluating site conditions will be conducted after the 5-year period. If the compliance strategy is not proceeding as predicted, the site will be re-evaluated and the strategy modified as necessary. When uranium concentrations are consistency below the MCL, monitoring will be discontinued and the institutional controls lifted, subject to regulatory approval.

The hazardous constituent source term and extent of groundwater contamination have been characterized in the Remedial Action Plan (DOE, 1983), the Processing Site Characterization (DOE, 1984), the Baseline Risk Assessment (DOE, 1995), and the Groundwater Compliance Action Plan and Application for ACLs (DOE, 1998). The Canonsburg site has had some form of

radionuclide processing or containment within its boundaries since 1911. In the early 1960s, some surface soil remediation was performed in Area A; the resulting contaminated soils and material were placed in Area C and covered with a relatively impermeable cover material. DOE remediated the surface contamination from 1984 to 1986 that will isolate the source and greatly reduce further infiltration of water through the tailings.

To evaluate the concentrations of fate and transport of uranium between the POC and the POE (Chartiers Creek), DOE used the GANDT code followed by a stream-aquifer model called the riverine model (NRC, 1982). The GANDT model uses both analytical and numerical models of subsurface flow and transport (Knowlton, et al., in press). Sandia National Laboratories (SNL) has been developing the Groundwater Analysis and Network Design Tool, or GANDT, to provide DOE environmental restoration programs with a comprehensive system for analyzing groundwater flow and associated contaminant transport, while directly accounting for transport uncertainty and providing decision analysis capabilities for monitoring well network design.

The objective of the model was to evaluate the likelihood of success of applying ACLs at the site. A probabilistic approach was applied, using Monte Carlo methods to quantify uncertainties. The model estimated the transport of constituents within and from a contaminated source zone, using a pulsed leaching algorithm; through the vadose zone, into the groundwater in the uppermost aquifer, migration and attenuation through groundwater, discharge into the stream, and dilution with the stream. The model's assumptions include the following:

- The surficial aquifer is assumed to be connected to Chartiers Creek. The stream is assumed to be gaining, that is all groundwater discharging into the stream. The stream is assumed to be a sink for all groundwater flowing toward it in the model. Monitoring well 406 was added to verify that this assumption is correct as requested by the NRC.
- A steady-state flow system is assumed.
- The unconfined aquifer is assumed to be homogeneous.
- Sources are assumed to be a single source.

Results of the model predict that concentrations would be one or two orders of magnitude below detection limits. Based on NRC comments, DOE calculated a worse case scenario that uranium concentrations entering the stream at levels in excess of 100 mg/L would still be protective due to dilution. Uranium concentrations are not predicted to be near the levels of 100 mg/L, but NRC wanted to determine the magnitude of variability and uncertainty that could be factored into the program without causing risk. To take into account uncertainties, DOE proposed the ACL for uranium at the POC at 1.0 mg/l. This value is considered to be conservative since DOE calculated that concentrations more than 100 mg/L could discharge into the stream before levels in the stream would be a risk. From a transient perspective of the contamination migration process, it is predicted that a buildup of contaminant concentrations in the aquifer will occur as the initial leaching process proceeds, followed by a decrease in contaminant concentrations after the source term is removed. Once the source term is removed, the processes of desorption, dispersion, and flushing will dominate the characteristics of the migration process, thereby, attenuating the contaminants.

The Baseline Risk Assessment estimated the risk to humans and the environment and concluded that there are no current human health risks associated with the site contaminated groundwater and that there could be potential risk if people were to drink the contaminated groundwater or if contaminated groundwater were used in irrigation. Based on these findings, the conclusion was made that groundwater beneath the site that is contaminated should not be used, at least until levels are below the MCL. The risk of contaminated groundwater discharging into Chartiers Creek was assessed and the report concluded that due to dilution no risk was found or anticipated. The scenarios evaluated for the creek included incidental ingestion of surface water through recreational use, dermal contact with surface water through recreational use, incidental ingestion of sediments through recreational use, and ingestion of contaminated fish.

DOE evaluated a groundwater pump and treat alternative and concluded that it would cost approximately \$1,112,000. Two hypothetical wells were modeled at a pumping rate of ten gallons per minute for a period of ten years. The model estimated that the concentrations would still be above the standard and would need an additional 5 to 10 years for natural attenuation to bring the contaminant levels to below the MCL. Therefore, the pump and treat option is marginally quicker than the preferred alternative and would be orders of magnitude more costly and would not be incrementally beneficial.

As a result of comments from the NRC, DOE evaluated the use of a permeable reactive treatment (PeRT) wall. DOE is using this innovative technology in Monticello, Utah, where uranium has been reduced to non-detectable levels. The wall would be placed between wells 412 and 414, down-gradient of the plume. Zero valent iron (ZVI) would be used to precipitate heavy metals from the ground water as it migrates through the wall. COCs uranium and molybdenum could be effectively reduced using this technology, however, manganese may increase because it is a trace element of ZVI. Uranium would precipitate as the mineral uraninite if the oxidation state of the aqueous solution is lowered sufficiently, as occurs with ZVI. The cost for this technology was estimated to be \$1,700,000 and would, therefore, not be cost effective. The high cost of this technology is mainly due to costly materials (ZVI).

REFERENCES:

U.S. Department of Energy (DOE), 1998, Groundwater Compliance Action Plan (GCAP) and Application for Alternate Concentration Limits for the Canonsburg, Pennsylvania, UMTRA Project Site.

DOE, 1995, Baseline Risk Assessment of Ground Water Contamination at the Uranium Mill Tailings Site Near Canonsburg, Pennsylvania, DOE/AL/62350-149, Rev. 1.

DOE, 1996, Final Programmatic Environmental Impact Statement for the Uranium Mill Tailings Remedial Action Ground Water Project, DOE/EIS-0198.

DOE, 1995, Long-Term Surveillance Plan for the Canonsburg, Pennsylvania, Disposal Site, DOE/AL62350-203, Rev. 0.

DOE, 1993, Remedial Action Plan for Stabilization of the Inactive Uranium Mill Tailings Site at Canonsburg, Pennsylvania, UMTRA-DOE/AL-140.

DOE, 1984, Processing Site Characterization Report, Canonsburg, Pennsylvania, UMTRA-DOE/AL-0041.

Knowlton, R.G., D.M. Peterson, D. Walker, H.Zhang, J. White, in press. Reference Manual for Groundwater Analysis and Network Design Tool, or GANDT, Sandia National Laboratory, Albuquerque, New Mexico.

U.S. Nuclear Regulatory Commission (NRC), 1982, A collection of Mathematical Models for Dispersion in Surface Water and Groundwater, NUREG-0868, written by R.B. Codell, K.T. Key, and G. Whelan.

APPENDIX 1
FACTORS TO CONSIDER FOR ACLS 40 CFR PART 192.02(C)(ii)(B)

- 1) Potential adverse effects on groundwater quality
 - i) The physical and chemical characteristics of constituents in the residual radioactive material at the site, including their potential for migration.
 - ii) The hydrogeological characteristics of the site and surrounding land.
 - iii) The quantity of groundwater and the direction of groundwater flow.
 - iv) The proximity and withdrawal rates of groundwater users.
 - v) The current and future uses of groundwater in the region surrounding the site.
 - vi) The existing quality of groundwater, including other sources of contamination and their cumulative impacts on the groundwater quality.
 - vii) The potential for health risks caused by human exposure to constituents.
 - viii) The potential damage to wildlife, crops, vegetation, and physical structures caused by exposure to constituents.
 - ix) The persistence and permanence of the potential adverse effects.
 - x) The presence of underground sources of drinking water and exempted aquifers identified under 144.7.
- 2) Potential adverse effects on hydraulically-connected surface water quality considering:
 - i) The volume and physical and chemical characteristics of the residual radioactive material at the site.
 - ii) The hydrogeological characteristics of the site and the surrounding land.
 - iii) The quantity of groundwater and the direction of groundwater flow.
 - iv) The patterns of rainfall in the region.
 - v) The proximity to the site to surface waters
 - vi) The current and future uses of surface waters in the region surrounding the site and any water quality standards established for those surface waters.
 - vii) The existing quality of surface water, including other sources of contamination and their cumulative effect on surface water quality
 - viii) The potential for health risks caused by human exposure to constituents.
 - ix) The potential damage to wildlife, crops, vegetation, and physical structures caused by exposure to constituents.
 - x) The persistence and permanence of the potential adverse effects.



UNITED STATES
NUCLEAR REGULATORY COMMISSION
WASHINGTON, D.C. 20555-0001

April 28, 2003

Mr. Art Kleinrath
U.S. Department of Energy
Grand Junction Office
2597 B 3/4 Road
Grand Junction, CO 81503

SUBJECT: REVIEW OF REQUEST FOR NRC APPROVAL TO AUTHORIZE DELETION
OF INSTITUTIONAL CONTROLS (AREA C) AT CANONSBURG,
PENNSYLVANIA

Dear Mr. Kleinrath:

In a letter dated June 5, 2002, Mr. Cooper Wayman of your staff requested the U.S. Nuclear Regulatory Commission's (NRC's) approval regarding the deletion of institutional controls at the Title I Uranium Mill Tailings Remedial Action (UMTRA) site at Canonsburg, Pennsylvania. During our review, you provided additional information that included site groundwater quality data and groundwater fate and transport modeling. This additional information demonstrated that groundwater levels are below regulatory standards and will most likely remain below regulatory levels in Area C. Based on the information provided to us, the NRC concurs with your proposal to delete institutional controls at the site.

During the technical review of this issue, NRC staff concluded that further groundwater use restrictions are not imperative based on the risk. However, we ask that you implement some groundwater monitoring in Area C in the future to account for the uncertainty of the fate and transport modeling and the potential for unforeseen increases in groundwater concentration levels. We ask that you provide us with a plan for groundwater monitoring at Area C. The Technical Evaluation Report supporting the need for this request is enclosed.


In accordance with 10 CFR 2.790 of NRC's "Rules of Practice for Domestic Licensing Proceedings and Issuance of Orders," a copy of this letter will be available electronically for public inspection in the NRC Public Document Room or from the Publicly Available Records (PARS) component of NRC's document system (ADAMS). ADAMS is accessible from the NRC Web site at <http://www.nrc.gov/reading-rm/adams.html> (the Public Electronic Reading Room).

A. Kleinrath

2

If you have any comments or questions regarding the NRC's review, please feel free to contact the NRC project manager, Jill Caverly, at 301-415-6699 or by email at jsc1@nrc.gov.

Sincerely,



Susan M. Frant, Chief
Fuel Cycle Facilities Branch
Division of Fuel Cycle Safety
and Safeguards
Office of Nuclear Material Safety
and Safeguards

Docket No. WM-42

Enclosure: Technical Evaluation Report

**TECHNICAL EVALUATION REPORT
DELETION OF INSTITUTIONAL CONTROLS AT CANONSBURG, PA**

DATE: April 21, 2003

DOCKET NO.: WM-42

LICENSEE: U.S. Department of Energy

PROJECT MANAGER: Jill S. Caverly

TECHNICAL REVIEWER: William von Till

SUMMARY AND CONCLUSIONS:

The U.S. Department of Energy Grand Junction Office (DOE) submitted to the U.S. Nuclear Regulatory Commission (NRC) for review, a proposal to lift institutional controls at the Title I Uranium Mill Tailing Remedial Action (UMTRA) site at Canonsburg, PA. Based on information provided by, and discussed with, DOE, NRC staff concluded that the deletion of institutional controls was acceptable. DOE provided supporting information and justification that the changes would not increase the risk to human health and the environment.

By letter dated June 5, 2002, the U. S. Department of Energy (DOE) submitted a request to remove institutional controls on Area C at the Canonsburg, PA UMTRA site. The NRC staff concurred on DOE's Groundwater Compliance Action Plan (GCAP) by letter dated January 24, 2000. DOE's GCAP and application for alternate concentration limits (ACLs) were detailed in letters dated September 9, 1998, April 8, 1999, and September 27, 1999. Additionally, a February 23, 2000, DOE report concluded that uranium was the only groundwater contaminant of concern.

Upon reviewing the most recent request by DOE to remove institutional controls, staff relayed several concerns via conference calls. These concerns were related to DOE's model predictions stating that:

results of the probabilistic analysis for the plume within Area C suggest that the concentrations of uranium will be elevated above the MCL in groundwater for a period of 15 to 20 years (page 24, DOE February 2000 GCAP).

To address NRC's concerns, DOE submitted a supplement to the GCAP by letter dated November 15, 2002, which provided recent site specific water quality data and revised modeling of the fate and transport of potential groundwater contamination.

Groundwater data collected from the point of compliance (POC) well 414 in the time period between 1997 and 2002 suggest that the groundwater contaminant plume may be attenuating

Enclosure

faster than previously predicted. DOE used the GANDT model to run multiple Monte Carlo simulations using more recent data since 1997. Since 1998, water quality in the POC well has been below the 0.044 mg/L uranium standard. The model results predict that the probability of exceeding the standard after 2005 is negligible.

NRC staff met with DOE on February 5, 2003, where DOE indicated that they would like to lift groundwater use restrictions when site data indicate that the concentrations are below regulatory levels.

CONCLUSION:

DOE has demonstrated through site groundwater quality data and groundwater fate and transport modeling that groundwater levels are below regulatory standards and are most likely to remain below regulatory levels in Area C. Therefore, further groundwater use restrictions are not imperative based on the risk. It is suggested, however, that some amount of groundwater monitoring in Area C be implemented to account for the uncertainty of the fate and transport modeling and the potential for unforeseen increases in groundwater concentration levels.

Appendix B

Real Estate Documentation

Acquisition

Site real property was acquired by the Commonwealth of Pennsylvania (state), through its Department of Environmental Resources, pursuant to Section 104 of UMTRCA (DOE 1995b). This property consisted of three parcels, Areas A, B, and C (Figure B-1).

Upon completion of remedial action, the State conveyed ownership of Areas A and B, via title transfer, to the U.S. government. Transfer was completed on September 13, 1995. Under Section 104(e)(1)(B) of UMTRCA, the state has opted to donate Area C to another government entity for public use (Section 2.3.4). This donation is pending.

Areas A and B consisted of 10.6 and 4.2 acres, respectively. In conjunction with the state's acquisition of Areas A and B, the Borough of Canonsburg, in the City of Canonsburg, vacated George Street and Ward Avenue. The notices to vacate were recorded by the Borough at the Office of the Recorder of Deeds in and for Washington County, in the courthouse of said county, Washington, Pennsylvania.

On the basis of the Remedial Action Plan (DOE 1983b), it was determined that 16 additional "non-designated" properties were required in order to complete the remedial action. These 16 properties were acquired by the U.S. Army Corps of Engineers (USACE), Pittsburgh District, on behalf of DOE.

The three parcels acquired by the state (Areas A, B, and C) and the several "non-designated" properties acquired by the USACE are listed in Table B-1 and shown on Figure B-1.

Table B-1. Real Property Acquisitions, Canonsburg Disposal Site

Tract	Acreage	Document	Date	Filing Location
Area A or Tract 118-1	10.60	Declaration of Taking		Washington County Court of Common Pleas, Adsectum Docket No. 104, 1982 term.
Area B or Tract 118-2	4.20	Declaration of Taking		Washington County Court of Common Pleas, Adsectum Docket No. 104, 1982 term.
101	0.68	Declaration of Taking	March 20, 1984	Washington County Courthouse
102	0.44	Declaration of Taking	March 27, 1984	Washington County Courthouse
103	3.07	Warranty Deed	December 14, 1983	Washington County Courthouse
104	0.26	Warranty Deed	December 14, 1983	Washington County Courthouse
106-1	0.28	Warranty Deed	November 29, 1983	Washington County Courthouse
106-2	0.52	Warranty Deed	November 29, 1983	Washington County Courthouse
107	0.27	Warranty Deed	December 13, 1983	Washington County Courthouse
108	0.12	Warranty Deed	December 13, 1983	Washington County Courthouse
109	0.05	Warranty Deed	December 14, 1983	Washington County Courthouse
112	0.90	Warranty Deed	November 29, 1983	Washington County Courthouse
113	6.15	Warranty Deed	May 31, 1984	Washington County Courthouse
114	1.23	Warranty Deed	December 14, 1983	Washington County Courthouse
116-1	0.62	Warranty Deed for Vacated Ward Street		Washington County Courthouse
116-2	1.57	Warranty Deed for Vacated George Street		Washington County Courthouse
117	3.28	Quit Claim Deed	November 7, 1984	Washington County Courthouse
125ML	17.85	Declaration of Taking	February 1, 1985	

- Notes:
1. Tract 125ML was a condemnation action to extinguish an oil and gas lease and other leasehold interests.
 2. Title assemblies and original deeds are on file at the DOE Management and Operating Contracts Division, Albuquerque.
 3. Deed for tracts Areas A and B is recorded as follows: 13 September 1995, Deed Book No. 2755, Page 15, Washington County, Pennsylvania.

Legal Description

The site is a certain tract of land situated in the second ward of the Borough of Canonsburg, Washington County, Pennsylvania, and more particularly bounded and described as follows:

Beginning at a point being the point of beginning of Tract No. 117 described in Book 2194, Page 190, being a point in the northerly right-of-way line of Consolidated Rail Corporation, on the left descending bank of Chartiers Creek, also located 60 feet northwesterly of station 768+61.60 of the original centerline of said Consolidated Rail Corporation; thence leaving Chartiers Creek and said right-of-way line, with the line of said Tract No. 117, also a line 60 feet northwesterly of and parallel with said centerline,

South $71^{\circ}15'$ west, 502.43 feet to a point on the easterly side of Strabane Avenue; thence continuing with said parallel line, crossing said avenue,

South $71^{\circ}15'00''$ west, 995.6 feet; thence southwesterly by a curve to the left concentric with and distant 60 feet by a radial measurement northwesterly from said original centerline, an arc distance of 474.68 feet, said curve having a radius of 1,970.80 feet and a chord which bears south $64^{\circ}21'00''$ west, a distance of 473.53 feet;

Thence southwesterly by a curve to the left concentric with and distant 60 feet by a radial measurement northwesterly from said original centerline, an arc distance of 208.42 feet, said curve having a radius of 1,492.69 feet and a chord which bears south $53^{\circ}27'00''$ west, a distance of 208.25 feet;

Thence southwesterly by a curve to the left concentric with and distant 60 feet by a radial measurement northwesterly from said original centerline, an arc distance of 49.24 feet, said curve having a radius of 1,206.28 feet and a chord which bears south $48^{\circ}16'50''$ west, a distance of 49.24 feet;

Thence with a radial line north $42^{\circ}53'20''$ west, 70 feet to a point in said northerly right-of-way line, also the south line of George Street (40 feet wide);

Thence leaving said Tract No. 117, north $30^{\circ}28'$ east, 100.44 feet to a corner of Tract 114 described in Book 2135, Page 197; thence with the line of said Tract No. 114,

North $18^{\circ}11'$ east, 28.00 feet to a point in Chartiers Creek; thence continuing with the line of said Tract No. 114, and with the line of Chartiers Creek, downstream,

North 29°20' east, 72.93 feet,
North 42°20' east, 76.03 feet,
North 40°37' east, 148.20 feet,
North 24°51' east, 153.40 feet to a corner common to said Tract No. 114
and Tract No. 113 described in Book 2152, Page 511, being a point in
Chartiers Creek; thence leaving said Tract No. 114, with the line of said
Tract No. 113, downstream in and along Chartiers Creek,

North 24°51' east, 81.60 feet,
South 67°15' east, 20.50 feet,
North 06°17' east, 123.70 feet,
North 01°59' west, 226.09 feet,
North 16°34' west, 31.05 feet to a point on the southerly right-of-way
line of the Pittsburgh Railways Co., also known as the Washington and
Canonsburg Railway (now abandoned), also a corner common to said
Tract No. 113 and Tract No. 112 described in Book 2132, Page 405;
thence leaving said Tract No. 113, with the line of said Tract No. 112,
along or within the southerly portion of Chartiers Creek, downstream,

North 15° 09' east, 48.00 feet,
North 19°37' east, 296.50 feet,
North 28°03' east, 47.28 feet to a corner common to said Tract No. 112
and Tract No. 106-2 described in Book 2132, Page 400, being a point
within or near the southerly portion of Chartiers Creek; thence leaving
said Tract No. 112, with the line of said Tract No. 106-2, within or along
the southerly portion of Chartiers Creek, downstream,

North 28°03' east, 135.22 feet,
North 32°13' east, 70.80 feet,
North 55°30' east, 13.73 feet to a corner common to said Tract No.
106-2 and Tract No. 103 described in Book 2134, Page 273 being a
point within or near the southerly portion of Chartiers Creek; thence
leaving said Tract No. 106-2, with the line of said Tract No. 103, within
or along the southerly portion of Chartiers Creek, downstream,

North 55°30' east, 67.27 feet,
North 70°59' east, 88.00 feet,
North 88°04' east, 69.50 feet,
South 76°05' east, 107.40 feet,
South 84°20' east, 85.60 feet,
North 72°50' east, 67.08 feet,
North 67°40' east, 68.50 feet along an adjusted course (record: north
68°01' east, 66.50 feet) to a corner common to said Tract No. 103 and
Tract No. 101 described in Declaration of Taking, Civil No. 84-1735,
U.S. District Court, Western District of Pennsylvania, being a point on
the right descending bank of Chartiers Creek; then leaving said Tract
No. 103, with the line of said Tract No. 101, down Chartiers Creek.

North 59°04' east, 175.58 feet,
North 76°49' east, 56.90 feet,
South 75°41' east, 56.60 feet,
South 59°38' east, 31.85 feet to a corner common to said Tract No. 101 and Tract No. 102 described in Declaration of Taking, Civil No. 84-1250, U.S. District Court, Western District of Pennsylvania, being a point on the right descending bank of Chartiers Creek; thence leaving said Tract No. 101, with the line of said Tract No. 102, down Chartiers Creek,

South 59°38' east, 21.94 feet,
South 31°22' east, 26.78 feet to a point on the northerly right-of-way line of the Washington and Canonsburg Railway Company (now abandoned), thence crossing said right-of-way,

South 31°22' east, 50.03 feet to a point on the southerly right-of-way line of said railway, also a corner common to said Tract No. 102 and Tract No. 118-2 described in Book 2755, Page 15, being a point located on the right descending bank of Chartiers Creek; thence leaving said Tract No. 102, with the line of said Tract No. 118-2, downstream,

South 31°58' east, 28.82 feet,
South 27°42' east, 166.65 feet,
South 43°25' east, 68.10 feet,
South 65°35' east, 214.75 feet along an adjusted course (Record: South 65°35' east 214.70 feet) to a point common to the west line of Strabane Avenue; thence leaving Chartiers Creek, continuing with the line of said Tract No. 118-2, with the west line of Strabane Avenue,

South 39°06' west, 154.30 feet,
South 30°00' west, 145.65 feet,
South 21°00' west, 100.47 feet to the intersection of the east line of Ward Street with the west line of Strabane Avenue; thence leaving said Tract No. 118-2, with the west line of Strabane Avenue, crossing Ward Street,

South 05°00' west, 44.55 feet to the intersection of the west line of Ward Street with the west line of Strabane Avenue, also a corner common to Tract No. 118-1 described in Book 2755, Page 15; thence with the line of said Tract No. 118-1, along the west line of Strabane Avenue,

South 05°00' west, 130.94 feet to the intersection of the north line of George Street with the west line of Strabane Avenue; thence leaving said Tract No. 118-1, with the west line of Strabane Avenue, crossing George Street,

South 05°00' west, 43.70 feet to the intersection of the south line of George Street, the west line of Strabane Avenue, and the northerly line of Tract No. 117, described in Book 2194, Page 190; thence leaving the west line of Strabane Avenue, with said line of said Tract No. 117, crossing Strabane Avenue,

North 71°15' east, 43.70 feet to a corner common to the east line of Strabane Avenue and said line of said Tract No. 117; thence leaving the east line of Strabane Avenue, continuing with said line of said Tract No. 117,

North 78°30'00" east, 475.43 feet to a point on the bank of Chartiers Creek, thence with the bank of Chartiers Creek,

South 18°45'00" east, 10.00 feet to the point of beginning.

Containing 34.169 acres (more or less).

Repository

Documentation and correspondence related to property acquisition are on file at the U.S. Department of Energy, 2597 B-3/4 Road, Grand Junction, Colorado, 81503.




Figure B-1. Real Estate Tract Map for Canonsburg Disposal Site

Area C Deed Restrictions

To be recorded in Washington County, Pennsylvania, records when
the sale of Area C is finalized.

(Note: These restrictions are offered as the recorded instrument described in Section 9, Exhibit A, *Invitation to Bid #93387 for the Purchase of Canonsburg Area 3.109-Acre Parcel*, issued February 19, 2002 by the Pennsylvania Department of General Services)

Deed Restrictions for a Parcel of Land referred to as Area C, Described as a Portion of the Property Addressed in the Notice of Filing of Declaration of Taking, Recorded in Book 2058, Pages 480 through 488 Inclusive, Records of the County of Washington, Commonwealth of Pennsylvania

(To be recorded in conjunction with the sale of said Area C, as described in the *Invitation to Bid #93387 for the Purchase of Canonsburg Area 3.109-Acre Parcel*, issued February 19, 2002 by the Pennsylvania Department of General Services)

WHEREAS said Area C, County of Washington, Commonwealth of Pennsylvania, is owned currently by the Commonwealth of Pennsylvania, as recorded in Book 2058, Pages 480 through 488 inclusive, records of the County of Washington, Commonwealth of Pennsylvania (see Exhibit 1); and

WHEREAS said Area C was used historically for extracting materials from radioactive ores and other related processing activities; and

WHEREAS the United States Department of Energy, under the Uranium Mill Tailings Radiation Control Act of 1978, (42 USC 7901, *et seq.*), removed residual radioactive materials and other solid materials from Area C to standards established by the United States Environmental Protection Agency at Title 40 *Code of Federal Regulations*, Part 192 and approved by the United States Nuclear Regulatory Commission, and placed those materials in an engineered disposal cell located across Strabane Avenue from Area C; and

WHEREAS two occurrences of soil containing low concentrations of thorium-230 referred to as Grids 0809 and 0240 in remediation records maintained by the United States Department of Energy Grand Junction, Colorado, Office (Exhibit 2), the maximum reported concentration of thorium-230 being 58 picocuries per gram; the elevation of the top of the occurrences being approximately 942 and 944 feet above mean sea level, respectively, were left in place and covered by at least 6 feet of clean fill material (Exhibit 3); and

WHEREAS because of natural radioactive decay sufficient thorium-230 may decay to radium-226 and radon-222 within 1,000 years to pose a potential human health risk if exposure is unlimited; and


WHEREAS historical ore processing activities resulted in contamination of the ground water in the shallow unconfined alluvial aquifer beneath Area C; said ground water currently meets applicable water quality standards; said ground water is monitored by the United States Department of Energy to determine ground water chemistry, one ground water monitor well is located on Area C, one surface water monitoring location for sampling Chartiers Creek is located along the stream bank in Area C; the United States Department of Energy is constrained by United States Nuclear Regulatory Commission-approved plans and applicable laws and regulations to continue to collect samples from these locations; and the United States Department

of Energy must properly decommission the monitor wells in accordance with Commonwealth of Pennsylvania regulations when the wells are no longer needed;


NOW THEREFORE, The owner of Area C shall observe the following restrictions on use of Area C as described below.

1. Excavations on Area C are limited to the following depths.
 - a. If a structure is to be built, the owner shall not excavate deeper than 4 feet below present surface grade so that at least 2 feet of clean material remains undisturbed on top of the thorium-230-contaminated soil.
 - b. For excavations for any other purpose (e.g., utilities), the owner shall not excavate deeper than 6 feet below present surface grade. These limits may be modified, depending on the location of excavation, if prior written approval is granted by the United States Department of Energy, the Pennsylvania Department of Environmental Protection, or their successors and assigns.
2. The owner shall grant access to the United States Department of Energy for sampling, maintaining, decommissioning or other activity related to one well and one surface water sampling location located within Area C.
3. Area C may not be developed or used for residential purposes.
4. For development of structures intended to be occupied for commercial, industrial, or any other purpose, the buyer is advised to consider incorporating radon-mitigation measures into the design of the structures. Occupied structures should be tested to confirm that indoor radon concentrations are within limits established to be protective of human health. The radon testing should be repeated periodically for the life of the structure. Any subsequent structures should also be tested for radon. Radon mitigation actions may be recommended if elevated radon concentrations are observed.
5. The owner shall not compromise the integrity of the stream bank along Chartiers Creek.
6. These restrictions shall endure in perpetuity or until they are removed by a consensus decision of the United States Department of Energy and the Commonwealth of Pennsylvania Department of Environmental Protection; except that Provision 2 above may be removed at the sole discretion of the United States Department of Energy.
7. These restrictions shall be binding on the purchaser and all subsequent owners of Area C.

Notarized signatures of authorized representatives of the U.S. Department of Energy and the Pennsylvania Department of Environmental Protection

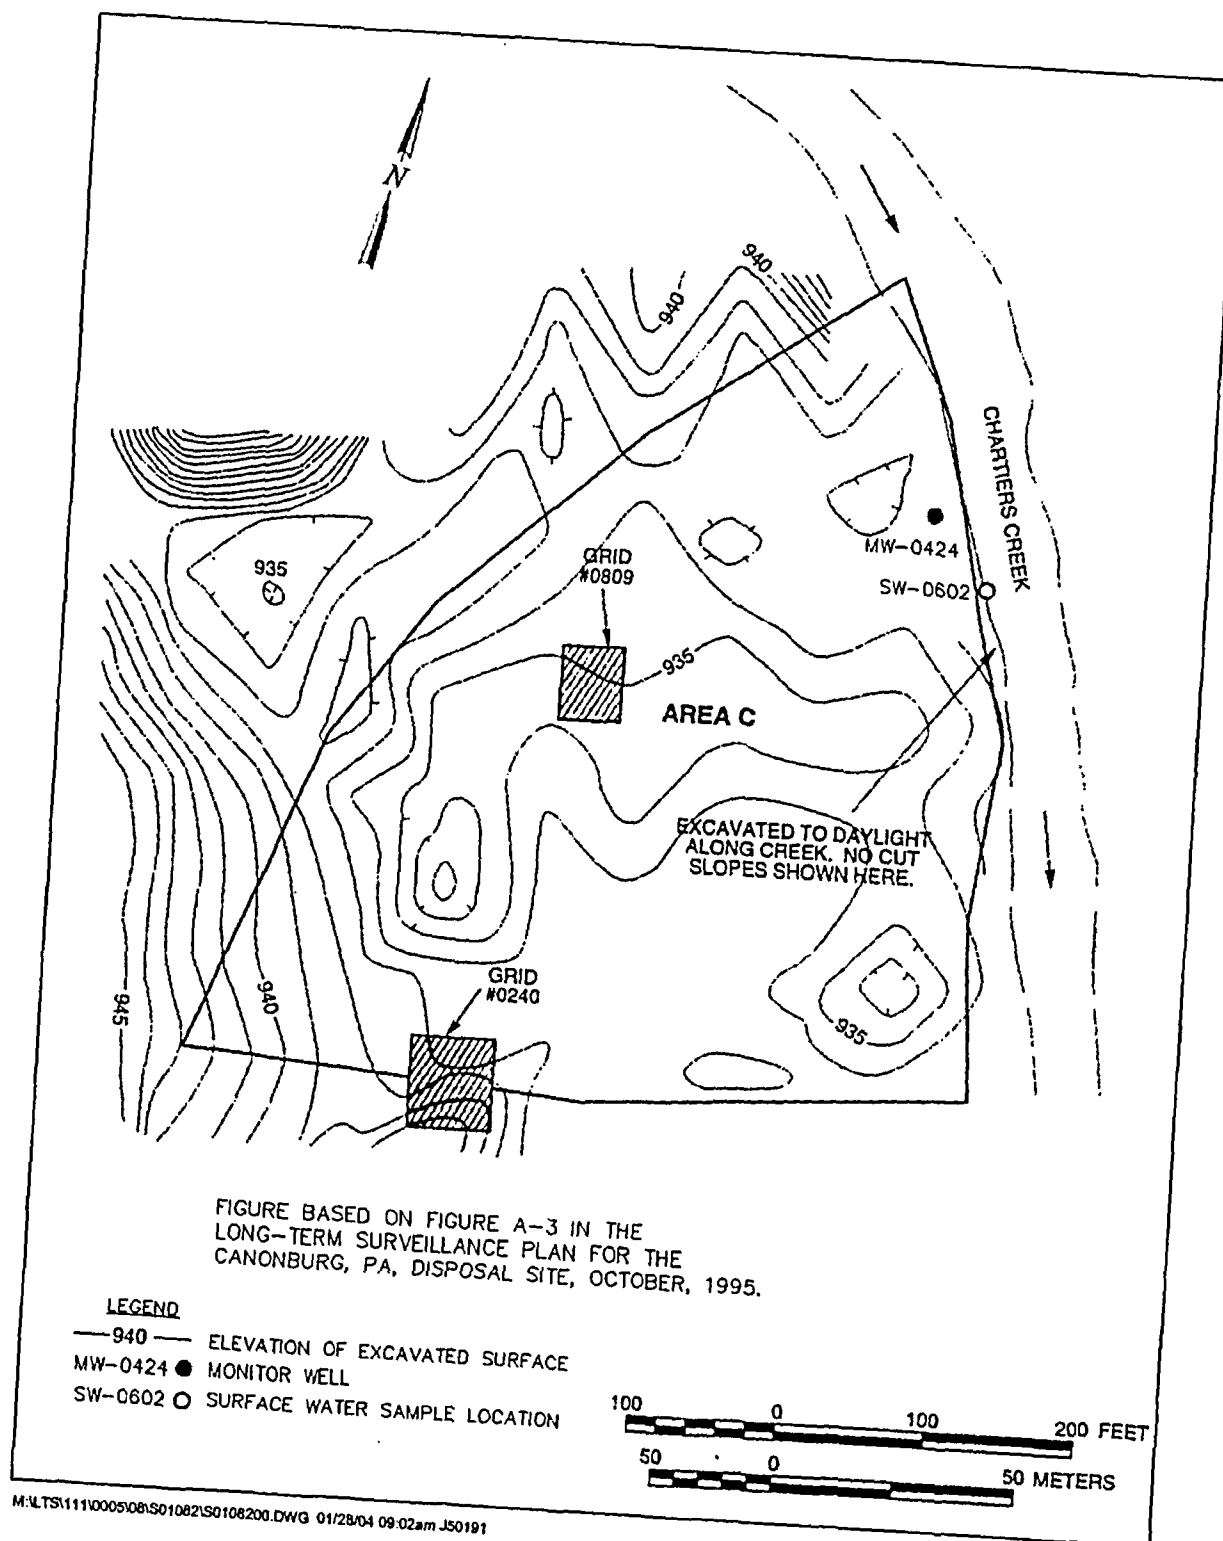

Deed Restrictions for Area C
Exhibit 2, showing the elevation of the top of the thorium-230-contaminated soil
in Grids 0240 and 0809.

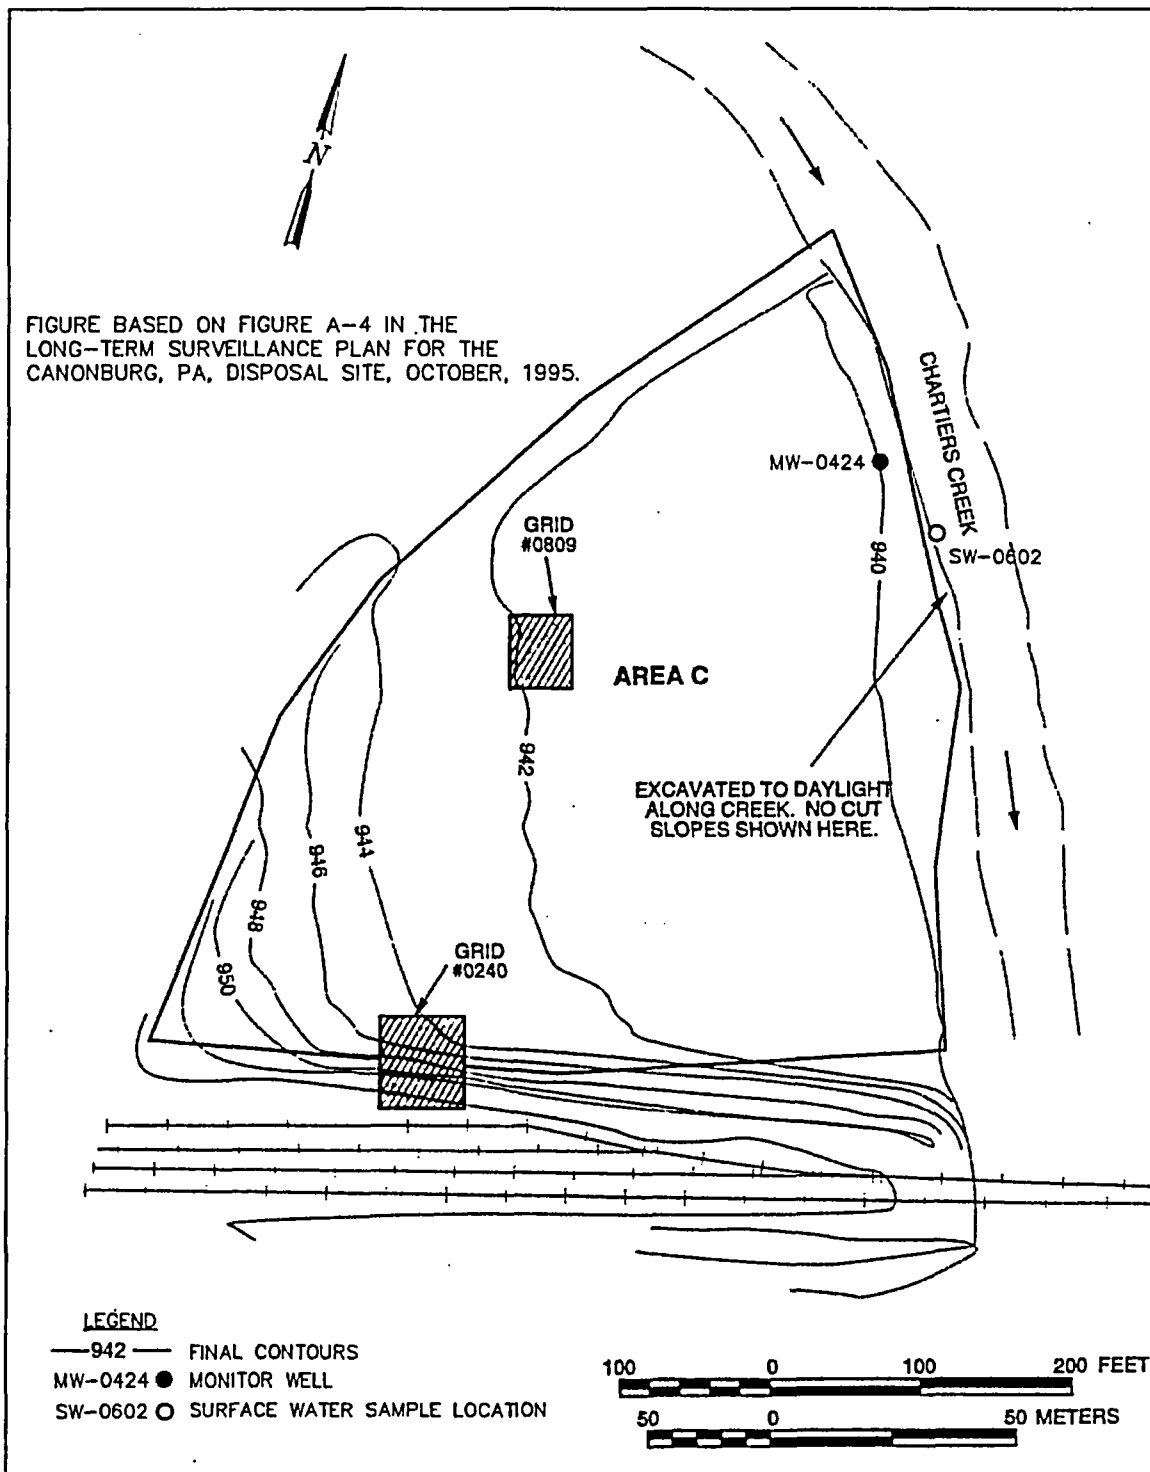

M:\LTS\111\0005\08\S01081\S0108100.DWG 01/28/04 09:11am J50191

*Deed Restrictions for Area C,
Exhibit 3, showing the final surface elevations from which
excavation depth limitations are measured.*

End of current text

Appendix C
Inspection Checklist

U.S. Department of Energy, Office of Legacy Management
Grand Junction, Colorado

CANONSBURG, PENNSYLVANIA, UMRCA TITLE I DISPOSAL SITE ANNUAL SITE INSPECTION CHECKLIST

Status of Site Inspections

Date of This Revision:

September 13, 2004

Last Annual Inspection:
Inspectors

October 29, 2003
Widdop and Kastens

Next Annual Inspection (Planned):

Week of September 20, 2004

No.	ITEM	ISSUE	ACTION
1	Access	Access is direct from Strabane Avenue.	None required
2	Protocols	Notify NRC and PA Department of Environmental Protection.	Jill Caverly (NRC) has been notified and will not attend. Chris Rittiger (PDEP) notified, Jeff Whitehead, representative the PA Radiation Protection Bureau will attend. Ron Staubly will be meeting inspectors Wednesday morning; other DOE observers may attend.
3	Specific site surveillance features	<p>See attached list.</p> <p>Gates: Padlocks on gates may be inoperable due to corrosion. Lock is inoperable on floodplain gate.</p> <p>Erosion Control Markers: For each ECM pair, the marker that is closest to the disposal cell marks the approx. location of the buried riprap wall. If it becomes apparent that the innermost ECM in the pair is threatened by erosion, DOE must take action (see LTSP, Section 3.5.2). Erosion control marker ECM-4A was lost to bank erosion in 1997.</p>	<p>Inspect.</p> <p>Carry spare locks and bolt cutter. Floodplain gate is not used.</p> <p>Inspect area around ECM-4A for further erosion.</p>

U.S. Department of Energy, Office of Legacy Management
Grand Junction, Colorado

No.	ITEM	ISSUE	ACTION
		<p>Boundary Monuments: Inspectors could not locate BM-4 in rip-rap covered channel in 2003.</p> <p>Security Fence: Fallen trees and tree limbs (deadfall) commonly damage the security fence. Barbed wire is corroded and broken in places; brackets are bent at one or more locations. Fabric is rusted.</p> <p>Concrete at the bottom of several fence posts along the northwest fence line is exposed.</p> <p>Perimeter Signs: Perimeter signs have been reported as missing in the past. P-1 missing in 2003.</p>	<p>Carry photos and shovel to locate monument.</p> <p>Limbs were removed and the fence repaired in September 2003 by subcontractor; evaluate need for additional maintenance work. Determine need for replacing fence components.</p> <p>Monitor stability of the fence posts.</p> <p>Carry extra signs and attachment hardware (alternatively, plan on shipping signs to subcontractor if signs are missing). Sub was to replace P-1. Replace fasteners on P-11.</p>
4	Monitor wells	<p>There are 8 monitor wells. The other 14 were decommissioned in 2002.</p> <p>FYI: Monitoring is required by the GCAP and under the LTSP as a BMP because uranium is above the MCL at monitor wells MW-0412, MW-0413, and MW-0414.</p> <p>A&S Landscaping reports that the protective cover was knocked off MW-0414A and the PVC casing is cracked.</p>	<p>Inspect each well.</p> <p>Evaluate, determine remedial measures.</p>
5	Vegetation	<p>Canada thistle, a noxious weed, is present at several locations (see drawing). Poison hemlock, an invasive weed, is established on the south portions of the site. Infestations were sprayed in spring 2004. Weeds were mowed repeatedly to prevent seeding.</p>	<p>Evaluate sprayed areas and success of weed control program.</p>

U.S. Department of Energy, Office of Legacy Management
Grand Junction, Colorado

No.	ITEM	ISSUE	ACTION
		<p>A selective (broadleaf) herbicide was specified but several areas seemed to have been treated with a general sterilant because grasses have not re-established.</p> <p>The grass on the disposal cell site requires mowing to maintain turf health.</p> <p>Deadfall accumulates in on-site groves, resulting in an unkempt appearance.</p>	<p>A sub is testing the soil to determine if reseeding can be performed this fall.</p> <p>Site was mowed week of September 6, 2004.</p> <p>Deadfall was removed in September 2003. Evaluate future maintenance requirements.</p>
6	Diversion channels and perimeter ditches	<p>Vegetation within diversion channels and perimeter ditches was sprayed in 2001 and removed in September 2002</p> <p>Individual rocks within the diversion channels have been observed to be deteriorating. This condition has not noticeably worsened and is considered an artifact of quarrying and placement. This issue should be closed.</p>	<p>Evaluate need for future maintenance.</p> <p>Inspectors routinely observe riprap quality; continue this practice.</p>
7	Bank stability: Disposal site	<p>During the site licensing process, there were concerns that flooding along Chartiers Creek could, hypothetically, threaten the disposal cell and VPLM area. DOE considers the risk very small (see LTSP, Section 3.5.2). Stoller had the subcontractor monitor water levels when an upstream dam failed due to flooding this spring. Water levels did not rise onto the floodplain and no damage occurred.</p>	<p>Inspect along: (1) security fence above the steep bank; and (2) floodplain adjacent to the site for stability and erosion.</p> <p><u>Floodplain:</u> From ECM 2 and 2A downstream to Strabane Avenue bridge.</p>
8	Bank stability: Area C	<p>Bank stabilization was completed in early 2001. Willow plantings were only marginally successful but grass is robust. Erosion has caused geotextile material to become exposed at several locations on the bank slope.</p> <p>Some localized rills have formed where Area C runoff concentrates at the top of the slope.</p>	<p>Inspect bank for stability; assess reveg on bank and on flat surface.</p> <p>Rocks were placed in the rills in September 2003; evaluate success of maintenance.</p>

U.S. Department of Energy, Office of Legacy Management
Grand Junction, Colorado

No.	ITEM	ISSUE	ACTION
9	Trash	Litter was removed from along Strabane Avenue. Larger trash and debris was left on floodplain and on Area C.	Carry trash bags and be prepared to pick up trash. Subcontractor was asked to remove debris - confirm.
10	Area C Transfer	Area C will be transferred from the Commonwealth of PA to a private owner. Upon transfer, DOE is no longer responsible for maintenance.	Determine if transfer has been completed.

**SPECIFIC SITE SURVEILLANCE FEATURES
CANONSBURG, PA, UMRCA TITLE I DISPOSAL SITE**

FEATURE	COMMENT
Access Road	Strabane Avenue (public right of way)
Gates	Entrance gate Auxiliary gate (north fence line)
Entrance Sign	1
Perimeter Signs	Total: 11
Security Fence	Chain link fabric, rusting, barbed wire becoming brittle
Survey Monuments	Total: 3
Boundary Monuments	Total: 4
Site Markers	Total: 2
Monitor Wells	Total: 8 MW-0410: Off-site, south – upgradient MW-0406A: Off-site northeast, across creek – downgradient MW-0412: On-site, north – downgradient MW-0413: On-site, northeast – downgradient MW-0414A: Area C, below railroad grade – crossgradient MW-0424: Area C, near Strabane Avenue bridge – downgradient MW-0504: Off-site, south, at MW-410 – water levels only MW-0505: Off-site, northeast, at MW-406 – water levels only

End of current text



Evaluation of Water Quality and Regulatory Compliance at the Canonsburg, Pennsylvania, Disposal Site

September 2005



Office of Legacy Management

Work Performed Under DOE Contract No. DE-AC01-02GJ79491
for the U.S. Department of Energy Office of Legacy Management.
Approved for public release; distribution is unlimited.

Office of Legacy Management

**Evaluation of Water Quality and
Regulatory Compliance
at the Canonsburg, Pennsylvania,
Disposal Site**

September 2005

Work Performed by S.M. Stoller Corporation under DOE Contract No. DE-AC01-02GJ79491
for the U.S. Department of Energy Office of Legacy Management, Grand Junction, Colorado

Contents

1.0	Introduction	1
2.0	Ground Water Occurrence and Contamination	1
3.0	Monitoring Results	3
4.0	Conclusions and Recommendations.....	3
5.0	References	6

Figures

Figure 1. Monitor Wells, Surface Water Sampling Locations, and Potentiometric Surface, Canonsburg Disposal	2
Figure 2. Uranium Concentration in Ground Water 1995 through 2004.....	4
Figure 3. Uranium Concentration in Surface Water 1995 through 2004.....	5

Appendices

Appendix A—Ground Water Quality Data by Location
Appendix B—Surface Water Quality Data by Location

End of current text

1.0 Introduction

The purpose of this report is to evaluate water quality monitoring results and status of compliance with regulatory requirements at the Canonsburg, Pennsylvania, disposal site. This site was remediated under Title I of the Uranium Mill Tailings Radiation Control Act.

The Canonsburg site surface was cleaned up to meet the requirements of Subpart A of Title 40 *Code of Federal Regulations* Part 192 (40 CFR 192) by December 1985 and included under the general U.S. Nuclear Regulatory Commission (NRC) license (10 CFR 40.27) in January 1996. Compliance with Subpart B of 40 CFR 192 was achieved through no remediation in conjunction with the application of an alternate concentration limit (ACL) for uranium, specifying ground water monitoring and institutional controls to ensure that the ACL will be protective of human health and the environment.¹ The ACL for uranium is 1.0 milligram per liter (mg/L) at the point of compliance (POC) wells (0412, 0413, and 0414). A target concentration limit of 0.01 mg/L is established at the point of exposure (POE) in Chartiers Creek (Figure 1). The U.S. Environmental Protection Agency (EPA) maximum concentration limit (MCL) for uranium is 0.044 mg/L (Table 1 to Subpart A of 40 CFR 192).

Ground water and surface water monitoring has been performed since the early 1980s at the Canonsburg disposal site. The 1995 Long-Term Surveillance Plan (LTSP) specified monitoring at six wells and three surface water locations. The Ground Water Compliance Action Plan (DOE 2000) requires annual monitoring of ground water at three POC wells, one other monitor well, and one surface water POE location for a period of no less than 5 years, with a re-evaluation of site conditions after the initial 5-year period. To fulfill this requirement, this report evaluates the past 10 years of monitoring results and provides an assessment of site conditions and regulatory compliance.

The recommendation offered as a result of this evaluation is to continue annual monitoring for uranium at all locations for an additional 5 years (through 2010), and then re-evaluate the results.

2.0 Ground Water Occurrence and Contamination

The uppermost aquifer beneath the Canonsburg site consists of unconsolidated materials overlying bedrock of the Pennsylvanian-age Casselman Formation. The unconsolidated materials are heterogeneous and do not form discrete, continuous units. The permeability of the uppermost aquifer is variable because of the types and placement of the materials. Ground water is present in the uppermost aquifer under unconfined to semi-confined conditions with a saturated thickness of approximately 10 feet. Ground water flows toward Chartiers Creek, which is the normal discharge zone for the shallow ground water (Figure 1). Limited ground water is present in the unconsolidated materials and shallow bedrock beneath the site. However, neither unit is considered a viable aquifer from a water resource perspective because of limited sustained yield.

¹Ground water use restrictions were never formally implemented for Area C, but the Commonwealth of Pennsylvania has owned the parcel, and government ownership has enabled DOE to control ground water withdrawal or use. In anticipation of the sale of Area C to a private entity, DOE obtained NRC concurrence in deleting the requirement for ground water use restrictions on Area C (NRC 2003). Ground water use restrictions on the DOE-owned disposal site are implemented by virtue of government ownership.

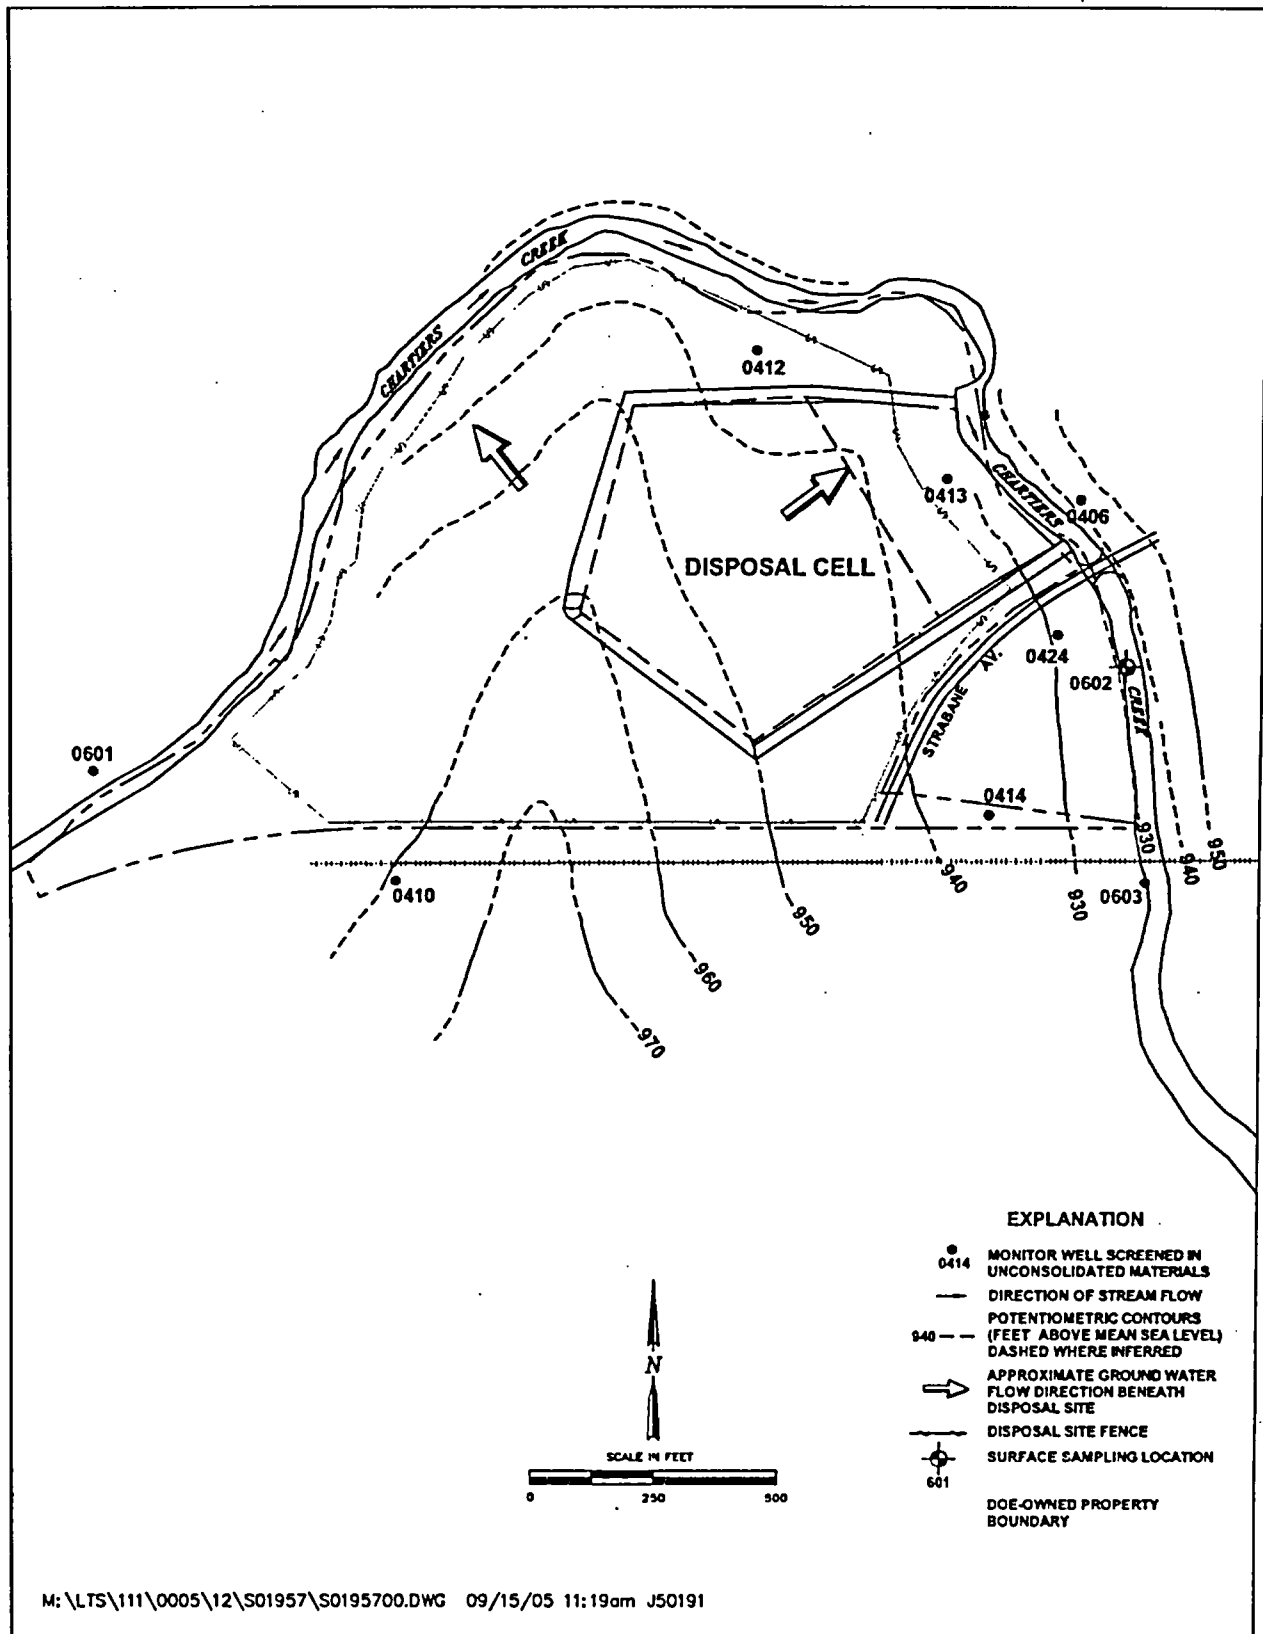


Figure 1. Monitor Wells, Surface Water Sampling Locations, and Potentiometric Surface, Canonsburg, PA, Disposal Site

Therefore, this "aquifer" is subject to ground water regulatory compliance only because the zone is capable of discharging to the surface water of Chartiers Creek (Appendix A to 10 CFR 40).

Some site-related contamination is present in ground water in the uppermost aquifer downgradient from the disposal cell and adjacent to Chartiers Creek. Uranium is the only constituent of potential concern that exceeds the MCL in ground water (Figure 2). Since remedial action, residual contamination in the saturated unconsolidated materials and, possibly, transient drainage from the disposal cell have continued their migration toward Chartiers Creek, where the aquifer discharges. Distribution of uranium contamination in ground water in the unconsolidated materials is irregular, and no well-defined contaminant plumes are apparent (DOE 2000). There is no evidence of any site-related contamination impacting surface water in Chartiers Creek (Figure 3). Figure 3 includes historical upstream and downstream results to show that concentrations can vary.

3.0 Monitoring Results

Evaluation of water quality information for the last 10 years (1995 through 2004) shows that concentrations of uranium in ground water in two of the POC wells (0412 and 0413) have been variable, with levels decreasing from 1997 through 2001, and then increasing for the past three years. Elevated and variable concentrations of uranium in ground water are expected as the POC wells are downgradient from the disposal cell, which was designed to leak over time (transient drainage). The amount of leakage and resulting concentrations of uranium in ground water are related to climatic conditions, amount of recharge and discharge in the shallow aquifer system, and the amount of moisture and contaminants in the disposal cell. Uranium levels are currently above the EPA MCL of 0.044 mg/L, but significantly below the ACL of 1.0 mg/L. It is anticipated that concentrations entering ground water will decrease over time as predicted by computer modeling (DOE 2000). There is currently no unacceptable risk to human health and the environment as there is no exposure to or use of ground water at the site (DOE 2000).

Uranium concentrations in surface water in Chartiers Creek adjacent to the site have been consistently at or below the laboratory detection limit of 0.001 mg/L.

4.0 Conclusions and Recommendations

Based on evaluation of data collected between 1995 and 2004, generally decreasing uranium concentrations in ground water indicate the compliance strategy for ground water protection at the Canonsburg site is proceeding. There is no unacceptable risk to human health and the environment related to uranium contamination in ground water. Even though uranium concentrations in ground water are not consistently decreasing, levels are well below the ACL. In addition, there is no indication of site-related contamination in surface water in adjacent Chartiers Creek. No other exposure pathways are complete.

Because of short-term variations of uranium concentrations in ground water observed during the last 10 years, and because upgradient ground water contains elevated uranium concentrations, it is recommended that environmental monitoring continue on an annual basis at five monitor wells

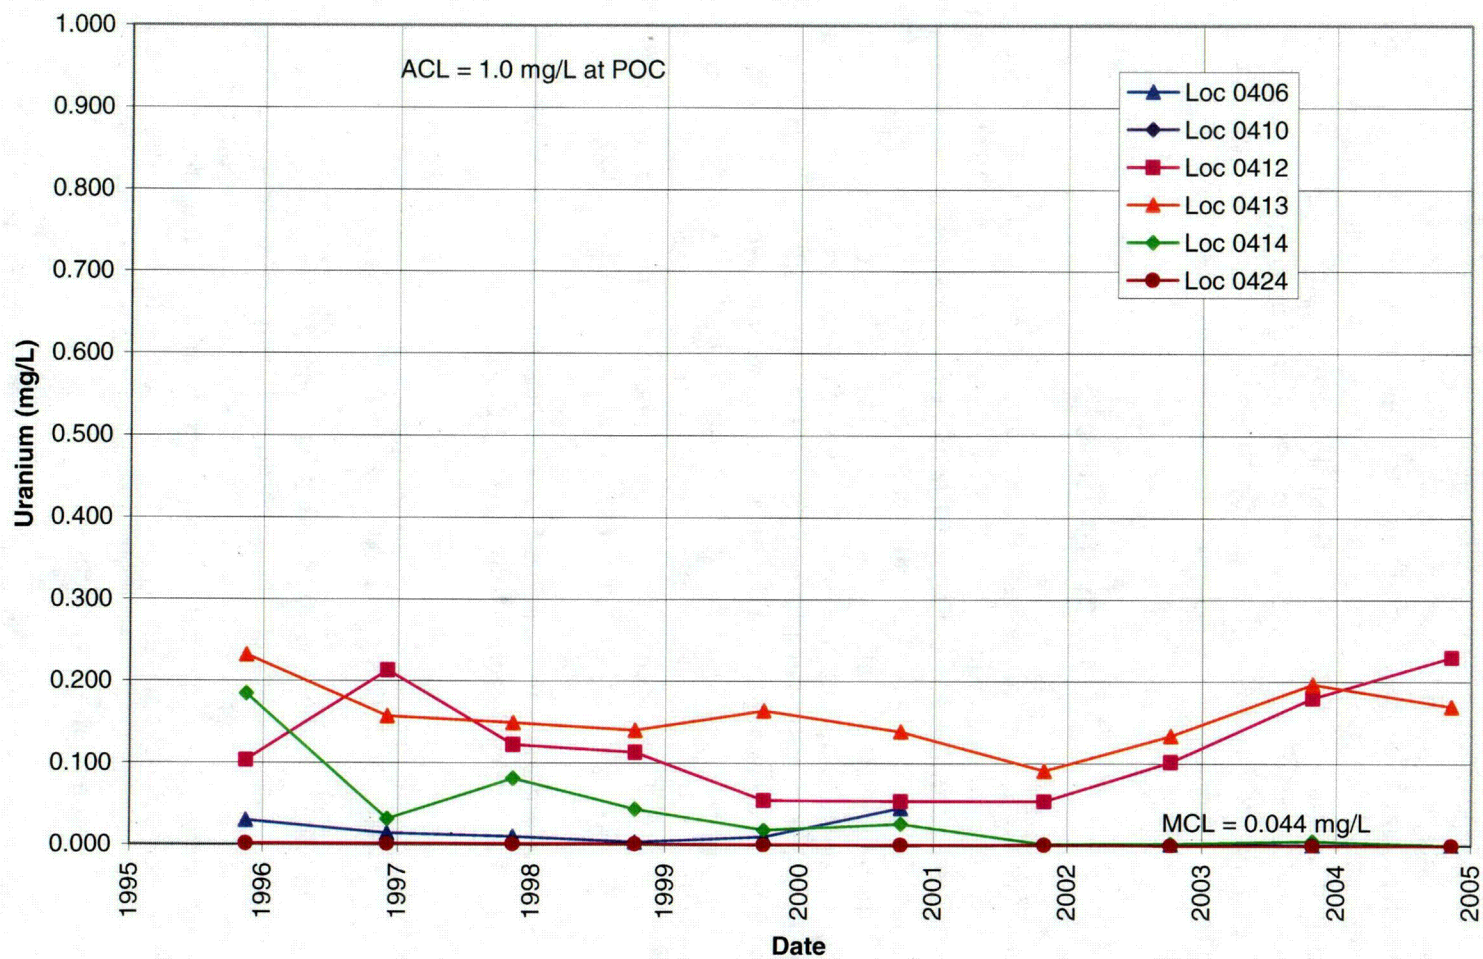


Figure 2. Uranium Concentration in Ground Water 1995 through 2004

C02

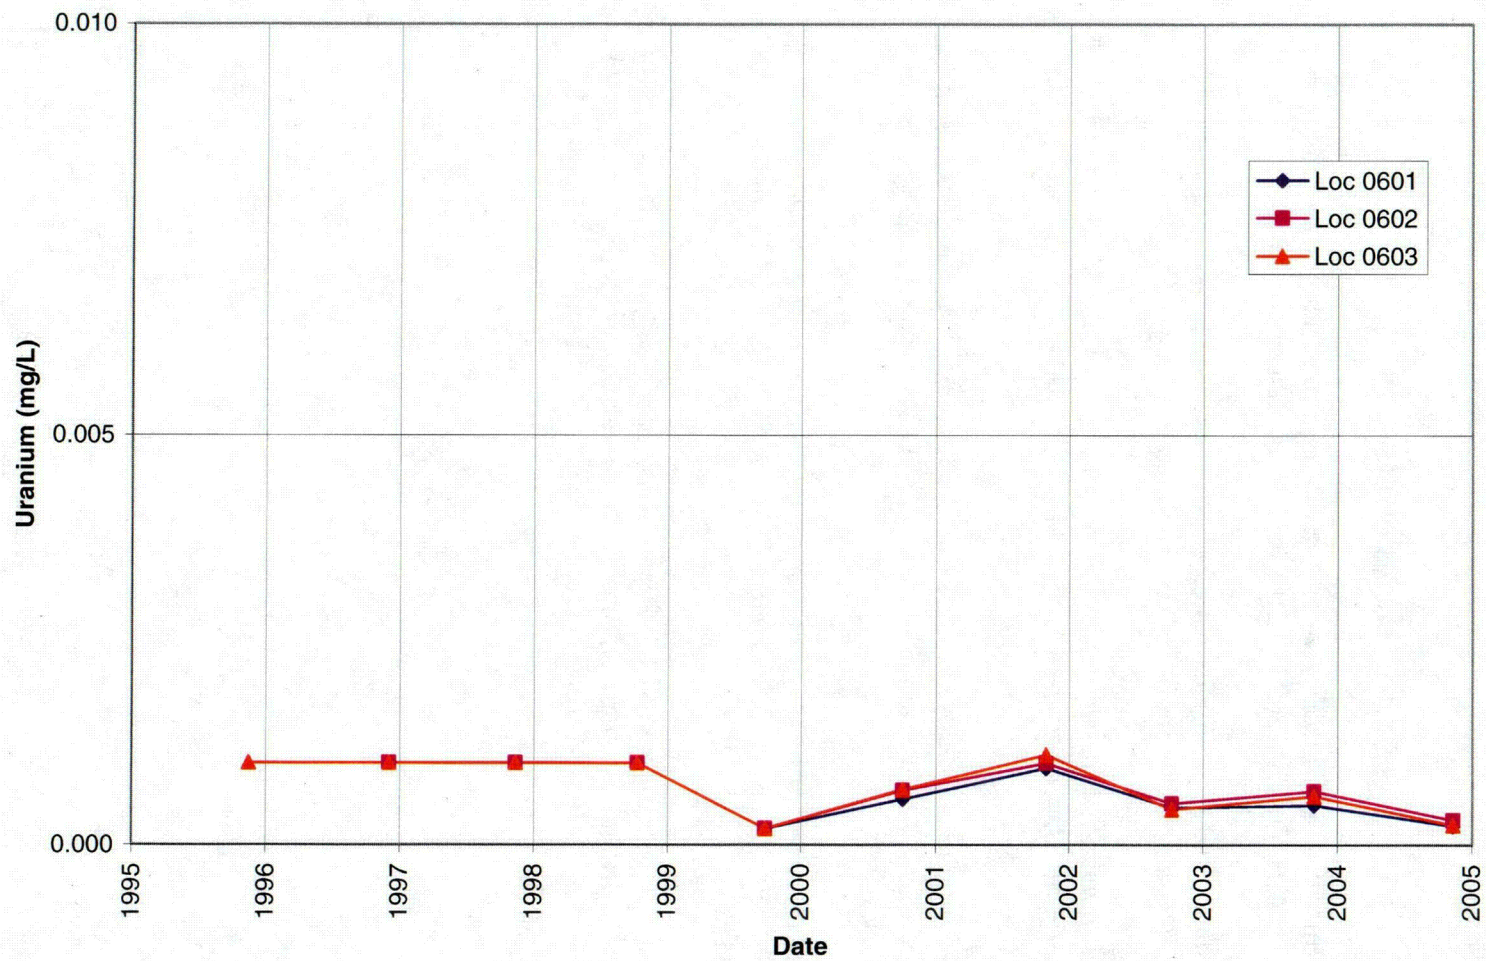


Figure 3. Uranium Concentration in Surface Water 1995 through 2004

003

and one surface water location for the next five years (locations 0406, 0412, 0413, 0414, 0424, and 0602). Upon receipt of NRC concurrence, samples should be analyzed only for uranium. At the end of this period, the monitoring program will be reassessed and modified as appropriate. The recommended monitoring program is described in Section 3.7.3 of the revised LTSP (DOE pending).

5.0 References

U.S. Department of Energy (DOE), 1995. *Long-Term Surveillance Plan for the Canonsburg, Pennsylvania, Disposal Site*, DOE/AL/62350-203, Rev. 0, Albuquerque, NM, October.

_____, 2000. *Ground Water Compliance Action Plan for the Canonsburg, Pennsylvania, UMTRA Project Site*, Document Number U0035901, Grand Junction, CO, February.

_____, 2004. *2004 Annual Site Inspection and Monitoring Report for Uranium Mill Tailings Radiation Control Act Title I Disposal Sites*, DOE-LM/GJ758-2004, Grand Junction, CO, December.

_____, 2005. *Data Validation Package – November 2004 Ground Water and Surface Water Sampling at the Canonsburg, Pennsylvania, Disposal Site*, DOE-LM/GJ815-2005, Grand Junction, CO, February.

_____, pending. *Long-Term Surveillance Plan for the U.S. Department of Energy Canonsburg Uranium Mill Tailings Disposal Site, Canonsburg, Pennsylvania*, DOE-LM/GJ838-2005, Grand Junction, CO, (in review).

U.S. Nuclear Regulatory Commission (NRC), 2003. "Review of Request for NRC Approval to Authorize Deletion of Institutional Controls (Area C) at Canonsburg, Pennsylvania," letter and attached Technical Evaluation Report from S. Frant, NRC, to A. Kleinrath, DOE, April 28.

Appendix A
Ground Water Quality Data
By Location

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0406 <well> Well was replaced by 0406A.

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Alkalinity, Total (As CaCO3	mg/L	11/16/1995	N001		413	F #	10	-
	mg/L	11/11/1997	N001		609	L #	-	-
	mg/L	10/11/1998	0001		695	L #	-	-
	mg/L	10/11/1998	N001		704	L #	-	-
	mg/L	09/25/1999	0001		578	L #	-	-
	mg/L	09/25/1999	N001		673	L #	-	-
	mg/L	10/04/2000	0001		670	L #	-	-
Arsenic	mg/L	11/16/1995	0001		0.005	W FJ #	0.005	-
	mg/L	12/05/1996	0001		0.0246	#	-	-
	mg/L	11/11/1997	0001		0.0137	L #	-	-
	mg/L	10/11/1998	0001		0.0256	L #	-	-
	mg/L	09/25/1999	0001		0.0110	L #	-	-
	mg/L	10/04/2000	0001		0.00093	B L #	0.0002	-
Calcium	mg/L	11/16/1995	0001		155	F #	0.5	-
	mg/L	12/05/1996	0001		226.000	#	-	-
	mg/L	11/11/1997	0001		194.000	L #	-	-
	mg/L	10/11/1998	0001		214.000	L #	-	-
	mg/L	09/25/1999	0001		203.000	L #	-	-
	mg/L	10/04/2000	0001		167.000	L #	0.0481	-
Chloride	mg/L	11/16/1995	0001		30.5	F #	0.5	-
	mg/L	12/05/1996	0001		43.700	#	-	-
	mg/L	11/11/1997	0001		24.600	L #	-	-
	mg/L	10/11/1998	0001		27.600	L #	-	-
	mg/L	09/25/1999	0001		24.600	L #	-	-
	mg/L	10/04/2000	0001		15.700	L #	0.0239	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0406 <well> Well was replaced by 0406A.

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Dissolved Oxygen	mg/L	11/16/1995	N001		11.0	F #	0.6	-
Iron	mg/L	11/16/1995	0001		4.18	F #	0.03	-
	mg/L	12/05/1996	0001		22.200	#	-	-
	mg/L	11/11/1997	0001		19.400	L #	-	-
	mg/L	10/11/1998	0001		22.600	L #	-	-
	mg/L	09/25/1999	0001		11.300	L #	-	-
	mg/L	10/04/2000	0001		0.186	L #	0.0116	-
Magnesium	mg/L	11/16/1995	0001		32.9	F #	0.1	-
	mg/L	12/05/1996	0001		42.600	#	-	-
	mg/L	11/11/1997	0001		34.800	L #	-	-
	mg/L	10/11/1998	0001		38.100	L #	-	-
	mg/L	09/25/1999	0001		37.700	L #	-	-
	mg/L	10/04/2000	0001		33.500	L #	0.0352	-
Manganese	mg/L	11/16/1995	0001		2.35	F #	0.01	-
	mg/L	12/05/1996	0001		7.810	#	-	-
	mg/L	11/11/1997	0001		6.870	L #	-	-
	mg/L	10/11/1998	0001		7.960	L #	-	-
	mg/L	09/25/1999	0001		5.410	L #	-	-
	mg/L	10/04/2000	0001		0.915	L #	0.002	-
Molybdenum	mg/L	11/16/1995	0001		0.01	U F #	0.01	-
	mg/L	12/05/1996	0001		0.0039	B #	-	-
	mg/L	11/11/1997	0001		0.0043	B L #	-	-
	mg/L	10/11/1998	0001		0.0039	B L #	-	-
	mg/L	09/25/1999	0001		0.0035	B L #	-	-
	mg/L	10/04/2000	0001		0.010	L #	0.0004	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0406 <well> Well was replaced by 0406A.

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Nitrate as NO3	mg/L	11/16/1995	N001		1	U F #	1	-
	mg/L	12/05/1996	0001		0.0454	B #	-	-
ORP of Zobell Solution	mV	10/04/2000	N001		231	L #	-	-
Oxidation Reduction Potent	mV	11/16/1995	N001		335	F #	-	-
	mV	12/05/1996	N001		-102	#	-	-
	mV	11/11/1997	N001		-78	L #	-	-
	mV	10/11/1998	N001		-132	L #	-	-
	mV	09/25/1999	N001		-107	L #	-	-
	mV	10/04/2000	N001		-12	L #	-	-
pH	s.u.	11/16/1995	N001		6.95	F #	0.1	-
	s.u.	12/05/1996	N001		6.95	#	-	-
	s.u.	11/11/1997	N001		6.52	L #	-	-
	s.u.	10/11/1998	N001		7.03	L #	-	-
	s.u.	09/25/1999	N001		6.87	L #	-	-
	s.u.	10/04/2000	N001		6.75	L #	-	-
Potassium	mg/L	11/16/1995	0001		6.0	F #	0.1	-
	mg/L	12/05/1996	0001		5.550	#	-	-
	mg/L	11/11/1997	0001		5.120	L #	-	-
	mg/L	10/11/1998	0001		5.570	L #	-	-
	mg/L	09/25/1999	0001		5.500	L #	-	-
	mg/L	10/04/2000	0001		9.790	L #	0.0327	-
Selenium	mg/L	11/11/1997	0001		0.0011	B L #	-	-
	mg/L	09/25/1999	0001		0.00019	B L #	-	-
Sodium	mg/L	11/16/1995	0001		19	F #	1	-
	mg/L	12/05/1996	0001		33.300	#	-	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0406 <well> Well was replaced by 0406A.

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Sodium	mg/L	11/11/1997	0001		27.800	L #	-	-
	mg/L	10/11/1998	0001		31.900	L #	-	-
	mg/L	09/25/1999	0001		32.500	L #	-	-
	mg/L	10/04/2000	0001		16.200	L #	0.302	-
Specific Conductance	umhos/cm	11/16/1995	N001		764	F #	1	-
	umhos/cm	12/05/1996	N001		1448	#	-	-
	umhos/cm	11/11/1997	N001		1292	L #	-	-
	umhos/cm	10/11/1998	N001		1357	L #	-	-
	umhos/cm	09/25/1999	N001		1377	L #	-	-
	umhos/cm	10/04/2000	N001		1160	L #	-	-
Sulfate	mg/L	11/16/1995	0001		110	F #	1	-
	mg/L	12/05/1996	0001		99.600	#	-	-
	mg/L	11/11/1997	0001		82.000	L #	-	-
	mg/L	10/11/1998	0001		84.000	L #	-	-
	mg/L	09/25/1999	0001		83.800	L #	-	-
	mg/L	10/04/2000	0001		100.000	L #	0.0589	-
Temperature	C	11/16/1995	N001		13.1	F #	0.1	-
	C	12/05/1996	N001		12.0	#	-	-
	C	11/11/1997	N001		14.5	L #	-	-
	C	10/11/1998	N001		19.3	L #	-	-
	C	09/25/1999	N001		20.1	L #	-	-
	C	10/04/2000	N001		20	L #	-	-
Temperature of Zobell Solu	C	10/04/2000	N001		18.9	L #	-	-
Total Dissolved Solids	mg/L	11/16/1995	0001		770	F #	10	-
	mg/L	12/05/1996	0001		880	#	-	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0406 <well> Well was replaced by 0406A.

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Total Dissolved Solids	mg/L	11/11/1997	0001		783	L #	-	-
	mg/L	10/11/1998	0001		863	L #	-	-
	mg/L	09/25/1999	0001		782	L #	-	-
	mg/L	10/04/2000	0001		715	L #	10	-
Turbidity	NTU	11/16/1995	N001		1045	F #	1	-
	NTU	12/05/1996	N001		83.5	#	-	-
	NTU	11/11/1997	N001		1000	> L #	-	-
	NTU	10/11/1998	N001		1000	> L #	-	-
	NTU	09/25/1999	N001		1000	> L #	-	-
	NTU	10/04/2000	N001		3.27	L #	-	-
Uranium	mg/L	11/16/1995	0001		0.030	F #	0.001	-
	mg/L	12/05/1996	0001		0.0142	#	-	-
	mg/L	11/11/1997	0001		0.0101	L #	-	-
	mg/L	10/11/1998	0001		0.0034	L #	-	-
	mg/L	09/25/1999	0001		0.0100	L #	-	-
	mg/L	10/04/2000	0001		0.0457	L #	0.0001	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0406 <well> Well was replaced by 0406A.

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
-----------	-------	-----------------	----	-------------------------	--------	----------------------------	--------------------	------------------

RECORDS: SELECTED FROM USEE100 WHERE site_code='CAN01' AND location_code in('0406','0406A','0410','0412','0413','0414','0414A','0414B','0424') AND quality_assurance = TRUE AND (data_validation_qualifiers IS NULL OR data_validation_qualifiers NOT LIKE '%R%' AND data_validation_qualifiers NOT LIKE '%X%') AND DATE_SAMPLED between #1/1/1995# and #12/31/2005#

SAMPLE ID CODES: 000X = Filtered sample (0.45 µm). N00X = Unfiltered sample. X = replicate number.

LAB QUALIFIERS:

- * Replicate analysis not within control limits.
- + Correlation coefficient for MSA < 0.995.
- > Result above upper detection limit.
- A TIC is a suspected aldol-condensation product.
- B Inorganic: Result is between the IDL and CRDL. Organic: Analyte also found in method blank.
- C Pesticide result confirmed by GC-MS.
- D Analyte determined in diluted sample.
- E Inorganic: Estimate value because of interference, see case narrative. Organic: Analyte exceeded calibration range of the GC-MS.
- H Holding time expired, value suspect.
- I Increased detection limit due to required dilution.
- J Estimated
- M GFAA duplicate injection precision not met.
- N Inorganic or radiochemical: Spike sample recovery not within control limits. Organic: Tentatively identified compound (TIC).
- P > 25% difference in detected pesticide or Arochlor concentrations between 2 columns.
- S Result determined by method of standard addition (MSA).
- U Analytical result below detection limit.
- W Post-digestion spike outside control limits while sample absorbance < 50% of analytical spike absorbance.
- X Laboratory defined (USEPA CLP organic) qualifier, see case narrative.
- Y Laboratory defined (USEPA CLP organic) qualifier, see case narrative.
- Z Laboratory defined (USEPA CLP organic) qualifier, see case narrative.

DATA QUALIFIERS:

- | | | |
|--|--|--------------------|
| F Low flow sampling method used. | G Possible grout contamination, pH > 9. | J Estimated value. |
| L Less than 3 bore volumes purged prior to sampling. | Q Qualitative result due to sampling technique | R Unusable result. |
| U Parameter analyzed for but was not detected. | X Location is undefined. | |

QA QUALIFIER: # = validated according to Quality Assurance guidelines.

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0406A <well> Replacement well for 0406.

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Alkalinity, Total (As CaCO ₃)	mg/L	10/08/2002	0001	5.00 - 15.00	731	F #	-	-
	mg/L	10/28/2003	0001	5.00 - 15.00	595	F #	-	-
	mg/L	11/09/2004	0001	5.00 - 15.00	670	FQ #	-	-
Calcium	mg/L	10/08/2002	0001	5.00 - 15.00	202.000	F #	0.0446	-
	mg/L	10/28/2003	0001	5.00 - 15.00	194.000	F #	0.056	-
	mg/L	11/09/2004	0001	5.00 - 15.00	220.000	FQ #	0.0026	-
Chloride	mg/L	10/08/2002	0001	5.00 - 15.00	51.400	F #	0.0401	-
	mg/L	10/28/2003	0001	5.00 - 15.00	80.800	F #	0.0231	-
	mg/L	11/09/2004	0001	5.00 - 15.00	72	FQ #	4	-
Gross Alpha	pCi/L	11/09/2004	0001	5.00 - 15.00	2.03	FQJ #	1.19	± 0.89
Gross Beta	pCi/L	11/09/2004	0001	5.00 - 15.00	5.83	FQJ #	2.23	± 1.71
Magnesium	mg/L	10/08/2002	0001	5.00 - 15.00	40.400	F #	0.011	-
	mg/L	10/28/2003	0001	5.00 - 15.00	43.100	F #	0.005	-
	mg/L	11/09/2004	0001	5.00 - 15.00	46.000	FQ #	0.0042	-
Manganese	mg/L	10/08/2002	0001	5.00 - 15.00	4.430	F #	0.0002	-
	mg/L	10/28/2003	0001	5.00 - 15.00	2.710	F #	0.0001	-
	mg/L	11/09/2004	0001	5.00 - 15.00	2.500	FQ #	6.6E-05	-
Molybdenum	mg/L	10/08/2002	0001	5.00 - 15.00	0.003	U F #	0.003	-
	mg/L	10/28/2003	0001	5.00 - 15.00	0.00170	U F #	0.0017	-
	mg/L	11/09/2004	0001	5.00 - 15.00	0.0014	FQ #	0.00017	-
Oxidation Reduction Potent	mV	10/08/2002	N001	5.00 - 15.00	-7	F #	-	-
	mV	10/28/2003	N001	5.00 - 15.00	-124	F #	-	-
	mV	11/09/2004	N001	5.00 - 15.00	-125.4	FQ #	-	-
pH	s.u.	10/08/2002	N001	5.00 - 15.00	7.01	F #	-	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0406A <well> Replacement well for 0406.

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE:		DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS:			DETECTION LIMIT	UN- CERTAINTY
		DATE	ID			LAB	DATA	QA		
pH	s.u.	10/28/2003	N001	5.00 - 15.00	6.86	F	#	-	-	-
	s.u.	11/09/2004	N001	5.00 - 15.00	6.85	FQ	#	-	-	-
Potassium	mg/L	10/08/2002	0001	5.00 - 15.00	4.360	F	#	0.0259	-	-
	mg/L	10/28/2003	0001	5.00 - 15.00	3.730	F	#	0.0091	-	-
	mg/L	11/09/2004	0001	5.00 - 15.00	5.300	FQ	#	0.064	-	-
Sodium	mg/L	10/08/2002	0001	5.00 - 15.00	37.300	F	#	0.895	-	-
	mg/L	10/28/2003	0001	5.00 - 15.00	45.700	F	#	0.0064	-	-
	mg/L	11/09/2004	0001	5.00 - 15.00	39.000	FQ	#	0.0046	-	-
Specific Conductance	umhos/cm	10/08/2002	N001	5.00 - 15.00	1501	F	#	-	-	-
	umhos/cm	10/28/2003	N001	5.00 - 15.00	1360	F	#	-	-	-
	umhos/cm	11/09/2004	N001	5.00 - 15.00	1516	FQ	#	-	-	-
Sulfate	mg/L	10/08/2002	0001	5.00 - 15.00	27.500	F	#	0.0393	-	-
	mg/L	10/28/2003	0001	5.00 - 15.00	51.900	F	#	0.0153	-	-
	mg/L	11/09/2004	0001	5.00 - 15.00	49	FQ	#	1	-	-
Temperature	C	10/08/2002	N001	5.00 - 15.00	18.3	F	#	-	-	-
	C	10/28/2003	N001	5.00 - 15.00	16.92	F	#	-	-	-
	C	11/09/2004	N001	5.00 - 15.00	14.68	FQ	#	-	-	-
Turbidity	NTU	10/08/2002	N001	5.00 - 15.00	9.69	F	#	-	-	-
	NTU	10/28/2003	N001	5.00 - 15.00	9.99	F	#	-	-	-
	NTU	11/09/2004	N001	5.00 - 15.00	12.9	FQ	#	-	-	-
Uranium	mg/L	10/08/2002	0001	5.00 - 15.00	0.0019	F	#	0.0001	-	-
	mg/L	10/28/2003	0001	5.00 - 15.00	0.00074	B	F	#	0.0001	-
	mg/L	11/09/2004	0001	5.00 - 15.00	0.00029	FQ	#	8.3E-06	-	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0406A <well> Replacement well for 0406.

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
-----------	-------	-----------------	----	-------------------------	--------	----------------------------	--------------------	------------------

RECORDS: SELECTED FROM USEE100 WHERE site_code='CAN01' AND location_code in('0406','0406A','0410','0412','0413','0414','0414A','0414B','0424') AND quality_assurance = TRUE AND (data_validation_qualifiers IS NULL OR data_validation_qualifiers NOT LIKE '%R%' AND data_validation_qualifiers NOT LIKE '%X%') AND DATE_SAMPLED between #1/1/1995# and #12/31/2005#

SAMPLE ID CODES: 000X = Filtered sample (0.45 µm). N00X = Unfiltered sample. X = replicate number.

LAB QUALIFIERS:

- Replicate analysis not within control limits.
- + Correlation coefficient for MSA < 0.995.
- > Result above upper detection limit.
- A TIC is a suspected aldol-condensation product.
- B Inorganic: Result is between the IDL and CRDL. Organic: Analyte also found in method blank.
- C Pesticide result confirmed by GC-MS.
- D Analyte determined in diluted sample.
- E Inorganic: Estimate value because of interference, see case narrative. Organic: Analyte exceeded calibration range of the GC-MS.
- H Holding time expired, value suspect.
- I Increased detection limit due to required dilution.
- J Estimated
- M GFAA duplicate injection precision not met.
- N Inorganic or radiochemical: Spike sample recovery not within control limits. Organic: Tentatively identified compound (TIC).
- P > 25% difference in detected pesticide or Arochlor concentrations between 2 columns.
- S Result determined by method of standard addition (MSA).
- U Analytical result below detection limit.
- W Post-digestion spike outside control limits while sample absorbance < 50% of analytical spike absorbance.
- X Laboratory defined (USEPA CLP organic) qualifier, see case narrative.
- Y Laboratory defined (USEPA CLP organic) qualifier, see case narrative.
- Z Laboratory defined (USEPA CLP organic) qualifier, see case narrative.

DATA QUALIFIERS:

- | | | |
|--|--|--------------------|
| F Low flow sampling method used. | G Possible grout contamination, pH > 9. | J Estimated value. |
| L Less than 3 bore volumes purged prior to sampling. | Q Qualitative result due to sampling technique | R Unusable result. |
| U Parameter analyzed for but was not detected. | X Location is undefined. | |

QA QUALIFIER: # = validated according to Quality Assurance guidelines.

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0410 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Alkalinity, Total (As CaCO ₃)	mg/L	11/17/1995	N001	11.48 - 16.08	77	F #	10	-
	mg/L	12/05/1996	0001	11.48 - 16.08	59	#	-	-
	mg/L	11/12/1997	N001	11.48 - 16.08	71	L #	-	-
	mg/L	10/10/1998	0001	11.48 - 16.08	97	L #	-	-
	mg/L	10/10/1998	N001	11.48 - 16.08	96	L #	-	-
	mg/L	09/25/1999	0001	11.48 - 16.08	55	L #	-	-
	mg/L	09/25/1999	N001	11.48 - 16.08	44	L #	-	-
	mg/L	10/03/2000	0001	11.48 - 16.08	81	L #	-	-
	mg/L	10/03/2000	N001	11.48 - 16.08	59	L #	-	-
	mg/L	10/08/2002	0001	11.48 - 16.08	21	F #	-	-
	mg/L	10/28/2003	0001	11.48 - 16.08	10	FQ #	-	-
	mg/L	11/09/2004	0001	11.48 - 16.08	50	FQ #	-	-
Arsenic	mg/L	11/17/1995	0001	11.48 - 16.08	0.005	U F #	0.005	-
	mg/L	12/05/1996	0001	11.48 - 16.08	0.00010	U #	0.0001	-
	mg/L	11/12/1997	0001	11.48 - 16.08	0.0010	U L #	0.001	-
	mg/L	10/10/1998	0001	11.48 - 16.08	0.0010	U L #	0.001	-
	mg/L	09/25/1999	0001	11.48 - 16.08	0.00040	U L #	0.0004	-
	mg/L	10/03/2000	0001	11.48 - 16.08	0.0002	U L #	0.0002	-
Calcium	mg/L	11/17/1995	0001	11.48 - 16.08	42.9	F #	0.5	-
	mg/L	12/05/1996	0001	11.48 - 16.08	44.100	#	-	-
	mg/L	11/12/1997	0001	11.48 - 16.08	41.700	L #	-	-
	mg/L	10/10/1998	0001	11.48 - 16.08	45.900	L #	-	-
	mg/L	09/25/1999	0001	11.48 - 16.08	41.700	L #	-	-
	mg/L	10/03/2000	0001	11.48 - 16.08	48.000	L #	0.0481	-
	mg/L	10/30/2001	0001	11.48 - 16.08	49.700	L #	0.0653	-
	mg/L	10/08/2002	0001	11.48 - 16.08	41.100	F #	0.0446	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0410 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Calcium	mg/L	10/28/2003	0001	11.48 - 16.08	24.700	FQ #	0.056	-
	mg/L	11/09/2004	0001	11.48 - 16.08	25.000	FQ #	0.0026	-
Chloride	mg/L	11/17/1995	0001	11.48 - 16.08	73.0	F #	0.5	-
	mg/L	12/05/1996	0001	11.48 - 16.08	99.600	#	-	-
	mg/L	11/12/1997	0001	11.48 - 16.08	96.600	L #	-	-
	mg/L	10/10/1998	0001	11.48 - 16.08	92.300	L #	-	-
	mg/L	09/25/1999	0001	11.48 - 16.08	99.300	L #	-	-
	mg/L	10/03/2000	0001	11.48 - 16.08	163.000	L #	0.0239	-
	mg/L	10/30/2001	0001	11.48 - 16.08	182.000	L #	0.1865	-
	mg/L	10/08/2002	0001	11.48 - 16.08	173.000	F #	0.2005	-
	mg/L	10/28/2003	0001	11.48 - 16.08	93.500	FQ #	0.231	-
	mg/L	11/09/2004	0001	11.48 - 16.08	81	FQ #	1	-
Dissolved Oxygen	mg/L	11/17/1995	N001	11.48 - 16.08	6.0	FJ #	0.6	-
Gross Alpha	pCi/L	11/09/2004	0001	11.48 - 16.08	0.756	FQJ #	0.567	± 0.40
Gross Beta	pCi/L	11/09/2004	0001	11.48 - 16.08	1.86	FQJ #	1.08	± 0.74
Iron	mg/L	11/17/1995	0001	11.48 - 16.08	10.00	F #	0.03	-
	mg/L	12/05/1996	0001	11.48 - 16.08	10.800	#	-	-
	mg/L	11/12/1997	0001	11.48 - 16.08	17.100	L #	-	-
	mg/L	10/10/1998	0001	11.48 - 16.08	18.500	L #	-	-
	mg/L	09/25/1999	0001	11.48 - 16.08	12.200	L #	-	-
	mg/L	10/03/2000	0001	11.48 - 16.08	15.000	L #	0.0116	-
Magnesium	mg/L	11/17/1995	0001	11.48 - 16.08	16.1	F #	0.1	-
	mg/L	12/05/1996	0001	11.48 - 16.08	18.200	#	-	-
	mg/L	11/12/1997	0001	11.48 - 16.08	16.800	L #	-	-
	mg/L	10/10/1998	0001	11.48 - 16.08	18.000	L #	-	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0410 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Magnesium	mg/L	09/25/1999	0001	11.48 - 16.08	16.700	L #	-	-
	mg/L	10/03/2000	0001	11.48 - 16.08	19.500	L #	0.0352	-
	mg/L	10/30/2001	0001	11.48 - 16.08	20.400	L #	0.0041	-
	mg/L	10/08/2002	0001	11.48 - 16.08	19.100	F #	0.011	-
	mg/L	10/28/2003	0001	11.48 - 16.08	12.500	FQ #	0.005	-
	mg/L	11/09/2004	0001	11.48 - 16.08	12.000	FQ #	0.0042	-
Manganese	mg/L	11/17/1995	0001	11.48 - 16.08	2.75	F #	0.01	-
	mg/L	12/05/1996	0001	11.48 - 16.08	3.070	#	-	-
	mg/L	11/12/1997	0001	11.48 - 16.08	2.880	L #	-	-
	mg/L	10/10/1998	0001	11.48 - 16.08	2.940	L #	-	-
	mg/L	09/25/1999	0001	11.48 - 16.08	2.690	L #	-	-
	mg/L	10/03/2000	0001	11.48 - 16.08	3.110	L #	0.002	-
	mg/L	10/30/2001	0001	11.48 - 16.08	3.160	L #	0.0001	-
	mg/L	10/08/2002	0001	11.48 - 16.08	2.280	F #	0.0002	-
	mg/L	10/28/2003	0001	11.48 - 16.08	1.380	FQ #	0.0001	-
	mg/L	11/09/2004	0001	11.48 - 16.08	1.300	FQ #	6.6E-05	-
Molybdenum	mg/L	11/17/1995	0001	11.48 - 16.08	0.01	U F #	0.01	-
	mg/L	12/05/1996	0001	11.48 - 16.08	0.0010	U #	0.001	-
	mg/L	11/12/1997	0001	11.48 - 16.08	0.0010	U L #	0.001	-
	mg/L	10/10/1998	0001	11.48 - 16.08	0.0010	U L #	0.001	-
	mg/L	09/25/1999	0001	11.48 - 16.08	0.00080	U L #	0.0008	-
	mg/L	10/03/2000	0001	11.48 - 16.08	0.0004	U L #	0.0004	-
	mg/L	10/30/2001	0001	11.48 - 16.08	0.0019	U L #	0.0019	-
	mg/L	10/08/2002	0001	11.48 - 16.08	0.003	U F #	0.003	-
	mg/L	10/28/2003	0001	11.48 - 16.08	0.00170	U FQ #	0.0017	-
	mg/L	11/09/2004	0001	11.48 - 16.08	0.00017	U FQ #	0.00017	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0410 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Nitrate as NO3	mg/L	11/17/1995	N001	11.48 - 16.08	9	F	# 1	-
	mg/L	12/05/1996	0001	11.48 - 16.08	0.102	B	#	-
ORP of Zobell Solution	mV	10/03/2000	N001	11.48 - 16.08	228	L	#	-
	mV	10/30/2001	N001	11.48 - 16.08	237	L	#	-
Oxidation Reduction Potent	mV	11/17/1995	N001	11.48 - 16.08	362	F	#	-
	mV	12/05/1996	N001	11.48 - 16.08	121		#	-
	mV	11/12/1997	N001	11.48 - 16.08	205	L	#	-
	mV	10/10/1998	N001	11.48 - 16.08	71	L	#	-
	mV	09/25/1999	N001	11.48 - 16.08	129	L	#	-
	mV	10/03/2000	N001	11.48 - 16.08	77	L	#	-
	mV	10/30/2001	N001	11.48 - 16.08	33	L	#	-
	mV	10/08/2002	N001	11.48 - 16.08	71.1	F	#	-
	mV	10/28/2003	N001	11.48 - 16.08	156	FQ	#	-
	mV	11/09/2004	N001	11.48 - 16.08	204.7	FQ	#	-
pH	s.u.	11/17/1995	N001	11.48 - 16.08	5.86	F	# 0.1	-
	s.u.	12/05/1996	N001	11.48 - 16.08	5.61		#	-
	s.u.	11/12/1997	N001	11.48 - 16.08	6.25	L	#	-
	s.u.	10/10/1998	N001	11.48 - 16.08	5.81	L	#	-
	s.u.	09/25/1999	N001	11.48 - 16.08	5.33	L	#	-
	s.u.	10/03/2000	N001	11.48 - 16.08	5.45	L	#	-
	s.u.	10/30/2001	N001	11.48 - 16.08	5.61	L	#	-
	s.u.	10/08/2002	N001	11.48 - 16.08	5.66	F	#	-
	s.u.	10/28/2003	N001	11.48 - 16.08	5.26	FQ	#	-
	s.u.	11/09/2004	N001	11.48 - 16.08	5.20	FQ	#	-
Potassium	mg/L	11/17/1995	0001	11.48 - 16.08	1.3	F	# 0.1	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0410 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Potassium	mg/L	12/05/1996	0001	11.48 - 16.08	1.280		#	-
	mg/L	11/12/1997	0001	11.48 - 16.08	1.150	L	#	-
	mg/L	10/10/1998	0001	11.48 - 16.08	1.330	L	#	-
	mg/L	09/25/1999	0001	11.48 - 16.08	1.070	L	#	-
	mg/L	10/03/2000	0001	11.48 - 16.08	1.210	L	#	0.0327
	mg/L	10/30/2001	0001	11.48 - 16.08	1.090	E JL	#	0.0151
	mg/L	10/08/2002	0001	11.48 - 16.08	1.350	F	#	0.0259
	mg/L	10/28/2003	0001	11.48 - 16.08	0.994	FQ	#	0.0091
	mg/L	11/09/2004	0001	11.48 - 16.08	1.900	FQ	#	0.064
Selenium	mg/L	11/12/1997	0001	11.48 - 16.08	0.0010	U L	#	0.001
	mg/L	09/25/1999	0001	11.48 - 16.08	0.00010	U L	#	0.0001
Sodium	mg/L	11/17/1995	0001	11.48 - 16.08	39	F	#	1
	mg/L	12/05/1996	0001	11.48 - 16.08	44.200		#	-
	mg/L	11/12/1997	0001	11.48 - 16.08	42.400	L	#	-
	mg/L	10/10/1998	0001	11.48 - 16.08	46.100	L	#	-
	mg/L	09/25/1999	0001	11.48 - 16.08	43.300	L	#	-
	mg/L	10/03/2000	0001	11.48 - 16.08	50.500	L	#	0.302
	mg/L	10/30/2001	0001	11.48 - 16.08	52.400	L	#	0.0074
	mg/L	10/08/2002	0001	11.48 - 16.08	65.100	F	#	0.895
	mg/L	10/28/2003	0001	11.48 - 16.08	54.900	FQ	#	0.0064
	mg/L	11/09/2004	0001	11.48 - 16.08	43.000	FQ	#	0.0046
Specific Conductance	umhos/cm	11/17/1995	N001	11.48 - 16.08	484	F	#	1
	umhos/cm	12/05/1996	N001	11.48 - 16.08	623		#	-
	umhos/cm	11/12/1997	N001	11.48 - 16.08	344	L	#	-
	umhos/cm	10/10/1998	N001	11.48 - 16.08	605	L	#	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0410 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE:		DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS:			DETECTION LIMIT	UN- CERTAINTY
		DATE	ID			LAB	DATA	QA		
Specific Conductance	umhos/cm	09/25/1999	N001	11.48 - 16.08	638		L	#	-	-
	umhos/cm	10/03/2000	N001	11.48 - 16.08	749		L	#	-	-
	umhos/cm	10/30/2001	N001	11.48 - 16.08	764		L	#	-	-
	umhos/cm	10/08/2002	N001	11.48 - 16.08	795		F	#	-	-
	umhos/cm	10/28/2003	N001	11.48 - 16.08	530		FQ	#	-	-
	umhos/cm	11/09/2004	N001	11.48 - 16.08	529		FQ	#	-	-
Sulfate	mg/L	11/17/1995	0001	11.48 - 16.08	106		F	#	1	-
	mg/L	12/05/1996	0001	11.48 - 16.08	98.500			#	-	-
	mg/L	11/12/1997	0001	11.48 - 16.08	98.500		L	#	-	-
	mg/L	10/10/1998	0001	11.48 - 16.08	86.500		L	#	-	-
	mg/L	09/25/1999	0001	11.48 - 16.08	72.700		L	#	-	-
	mg/L	10/03/2000	0001	11.48 - 16.08	83.200		L	#	0.0589	-
	mg/L	10/30/2001	0001	11.48 - 16.08	95.400		L	#	0.2045	-
	mg/L	10/08/2002	0001	11.48 - 16.08	86.700		F	#	0.1965	-
	mg/L	10/28/2003	0001	11.48 - 16.08	83.500		FQ	#	0.153	-
	mg/L	11/09/2004	0001	11.48 - 16.08	83		FQ	#	2.5	-
Temperature	C	11/17/1995	N001	11.48 - 16.08	14.9		F	#	0.1	-
	C	12/05/1996	N001	11.48 - 16.08	14.1			#	-	-
	C	11/12/1997	N001	11.48 - 16.08	14.8		L	#	-	-
	C	10/10/1998	N001	11.48 - 16.08	16.1		L	#	-	-
	C	09/25/1999	N001	11.48 - 16.08	16.2		L	#	-	-
	C	10/03/2000	N001	11.48 - 16.08	15.9		L	#	-	-
	C	10/30/2001	N001	11.48 - 16.08	8.5		L	#	-	-
	C	10/08/2002	N001	11.48 - 16.08	16.9		F	#	-	-
	C	10/28/2003	N001	11.48 - 16.08	15.39		FQ	#	-	-
	C	11/09/2004	N001	11.48 - 16.08	15.04		FQ	#	-	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0410 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Temperature of Zobell Solu	C	10/03/2000	N001	11.48 - 16.08	19	L #	-	-
	C	10/30/2001	N001	11.48 - 16.08	8.5	L #	-	-
Total Dissolved Solids	mg/L	11/17/1995	0001	11.48 - 16.08	390	F #	10	-
	mg/L	12/05/1996	0001	11.48 - 16.08	320	#	-	-
	mg/L	11/12/1997	0001	11.48 - 16.08	387	L #	-	-
	mg/L	10/10/1998	0001	11.48 - 16.08	393	L #	-	-
	mg/L	09/25/1999	0001	11.48 - 16.08	295	L #	-	-
	mg/L	10/03/2000	0001	11.48 - 16.08	420	L #	10	-
Turbidity	NTU	11/17/1995	N001	11.48 - 16.08	26.2	F #	1	-
	NTU	12/05/1996	N001	11.48 - 16.08	14.7	#	-	-
	NTU	11/12/1997	N001	11.48 - 16.08	14.7	L #	-	-
	NTU	10/10/1998	N001	11.48 - 16.08	15.1	L #	-	-
	NTU	09/25/1999	N001	11.48 - 16.08	34.4	L #	-	-
	NTU	10/03/2000	N001	11.48 - 16.08	18.9	L #	-	-
	NTU	10/30/2001	N001	11.48 - 16.08	58	L #	-	-
	NTU	10/08/2002	N001	11.48 - 16.08	7.9	F #	-	-
	NTU	10/28/2003	N001	11.48 - 16.08	5.29	FQ #	-	-
	NTU	11/09/2004	N001	11.48 - 16.08	6.49	FQ #	-	-
Uranium	mg/L	11/17/1995	0001	11.48 - 16.08	0.001	U F #	0.001	-
	mg/L	12/05/1996	0001	11.48 - 16.08	0.0010	U #	0.001	-
	mg/L	11/12/1997	0001	11.48 - 16.08	0.0010	U L #	0.001	-
	mg/L	10/10/1998	0001	11.48 - 16.08	0.0010	U L #	0.001	-
	mg/L	09/25/1999	0001	11.48 - 16.08	0.00020	U L #	0.0002	-
	mg/L	10/03/2000	0001	11.48 - 16.08	0.00017	B UL #	0.0001	-
	mg/L	10/30/2001	0001	11.48 - 16.08	0.0006	B UL #	0.0001	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0410 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Uranium	mg/L	10/08/2002	0001	11.48 - 16.08	0.0001	U F #	0.0001	-
	mg/L	10/28/2003	0001	11.48 - 16.08	0.00010	U FQ #	0.0001	-
	mg/L	11/09/2004	0001	11.48 - 16.08	0.00003	B UFQ #	8.3E-06	-

RECORDS: SELECTED FROM USEE100 WHERE site_code='CAN01' AND location_code in('0406','0406A','0410','0412','0413','0414','0414A','0414B','0424') AND quality_assurance = TRUE AND (data_validation_qualifiers IS NULL OR data_validation_qualifiers NOT LIKE '%R%' AND data_validation_qualifiers NOT LIKE '%X%') AND DATE_SAMPLED between #1/1/1995# and #12/31/2005#

SAMPLE ID CODES: 000X = Filtered sample (0.45 µm). N00X = Unfiltered sample. X = replicate number.

LAB QUALIFIERS:

- * Replicate analysis not within control limits.
- + Correlation coefficient for MSA < 0.995.
- > Result above upper detection limit.
- A TIC is a suspected aldol-condensation product.
- B Inorganic: Result is between the IDL and CRDL. Organic: Analyte also found in method blank.
- C Pesticide result confirmed by GC-MS.
- D Analyte determined in diluted sample.
- E Inorganic: Estimate value because of interference, see case narrative. Organic: Analyte exceeded calibration range of the GC-MS.
- H Holding time expired, value suspect.
- I Increased detection limit due to required dilution.
- J Estimated
- M GFAA duplicate injection precision not met.
- N Inorganic or radiochemical: Spike sample recovery not within control limits. Organic: Tentatively identified compound (TIC).
- P > 25% difference in detected pesticide or Arochlor concentrations between 2 columns.
- S Result determined by method of standard addition (MSA).
- U Analytical result below detection limit.
- W Post-digestion spike outside control limits while sample absorbance < 50% of analytical spike absorbance.
- X Laboratory defined (USEPA CLP organic) qualifier, see case narrative.
- Y Laboratory defined (USEPA CLP organic) qualifier, see case narrative.
- Z Laboratory defined (USEPA CLP organic) qualifier, see case narrative.

DATA QUALIFIERS:

- | | | |
|--|--|--------------------|
| F Low flow sampling method used. | G Possible grout contamination, pH > 9. | J Estimated value. |
| L Less than 3 bore volumes purged prior to sampling. | Q Qualitative result due to sampling technique | R Unusable result. |
| U Parameter analyzed for but was not detected. | X Location is undefined. | |

QA QUALIFIER: # = validated according to Quality Assurance guidelines.

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0412 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Alkalinity, Total (As CaCO ₃)	mg/L	11/16/1995	N001	13.21 - 18.21	500		# 10	-
	mg/L	12/04/1996	0001	13.21 - 18.21	549		# -	-
	mg/L	11/12/1997	N001	13.21 - 18.21	469		# -	-
	mg/L	10/11/1998	0001	13.21 - 18.21	447		# -	-
	mg/L	10/11/1998	N001	13.21 - 18.21	458		# -	-
	mg/L	09/26/1999	0001	13.21 - 18.21	395	L	# -	-
	mg/L	09/26/1999	N001	13.21 - 18.21	409	L	# -	-
	mg/L	10/04/2000	0001	13.21 - 18.21	397	L	# -	-
	mg/L	10/04/2000	N001	13.21 - 18.21	437	L	# -	-
	mg/L	10/08/2002	0001	13.21 - 18.21	449	F	# -	-
	mg/L	10/29/2003	0001	13.21 - 18.21	765	F	# -	-
	mg/L	11/09/2004	0001	13.21 - 18.21	961	F	# -	-
Arsenic	mg/L	11/16/1995	0001	13.21 - 18.21	0.005	U	# 0.005	-
	mg/L	12/04/1996	0001	13.21 - 18.21	0.00081	B	# -	-
	mg/L	12/04/1996	0002	13.21 - 18.21	0.00064	B	# -	-
	mg/L	11/12/1997	0001	13.21 - 18.21	0.0010	U	# 0.001	-
	mg/L	10/11/1998	0001	13.21 - 18.21	0.0042	B	# -	-
	mg/L	10/11/1998	0002	13.21 - 18.21	0.0037	B	# -	-
	mg/L	09/26/1999	0001	13.21 - 18.21	0.0017	B L	# -	-
	mg/L	10/04/2000	0001	13.21 - 18.21	0.0023	B L	# 0.0002	-
Calcium	mg/L	11/16/1995	0001	13.21 - 18.21	384		# 0.5	-
	mg/L	12/04/1996	0001	13.21 - 18.21	465.000		# -	-
	mg/L	12/04/1996	0002	13.21 - 18.21	438.000		# -	-
	mg/L	11/12/1997	0001	13.21 - 18.21	403.000		# -	-
	mg/L	10/11/1998	0001	13.21 - 18.21	399.000		# -	-
	mg/L	10/11/1998	0002	13.21 - 18.21	398.000		# -	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0412 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Calcium	mg/L	09/26/1999	0001	13.21 - 18.21	356.000	L #	-	-
	mg/L	10/04/2000	0001	13.21 - 18.21	360.000	L #	0.0481	-
	mg/L	10/30/2001	0001	13.21 - 18.21	363.000	L #	0.0653	-
	mg/L	10/08/2002	0001	13.21 - 18.21	387.000	F #	0.0446	-
	mg/L	10/08/2002	0002	13.21 - 18.21	395.000	F #	0.0446	-
	mg/L	10/29/2003	0001	13.21 - 18.21	473.000	F #	0.056	-
	mg/L	11/09/2004	0001	13.21 - 18.21	540.000	F #	0.013	-
	mg/L	11/09/2004	0002	13.21 - 18.21	530.000	F #	0.013	-
Chloride	mg/L	11/16/1995	0001	13.21 - 18.21	60.3	#	0.5	-
	mg/L	12/04/1996	0001	13.21 - 18.21	49.400	#	-	-
	mg/L	12/04/1996	0002	13.21 - 18.21	49.100	#	-	-
	mg/L	11/12/1997	0001	13.21 - 18.21	45.600	#	-	-
	mg/L	10/11/1998	0001	13.21 - 18.21	35.600	#	-	-
	mg/L	10/11/1998	0002	13.21 - 18.21	36.000	#	-	-
	mg/L	09/26/1999	0001	13.21 - 18.21	28.900	L #	-	-
	mg/L	10/04/2000	0001	13.21 - 18.21	27.700	L #	0.0239	-
	mg/L	10/30/2001	0001	13.21 - 18.21	26.800	L #	0.746	-
	mg/L	10/08/2002	0001	13.21 - 18.21	27.200	F #	0.802	-
	mg/L	10/08/2002	0002	13.21 - 18.21	25.200	F #	0.802	-
	mg/L	10/29/2003	0001	13.21 - 18.21	23.400	F #	0.0231	-
	mg/L	11/09/2004	0001	13.21 - 18.21	21	F #	4	-
	mg/L	11/09/2004	0002	13.21 - 18.21	22	F #	4	-
Dissolved Oxygen	mg/L	11/16/1995	N001	13.21 - 18.21	11.0	#	0.6	-
Gross Alpha	pCi/L	11/09/2004	0001	13.21 - 18.21	212	F #	3.89	± 35.0
	pCi/L	11/09/2004	0002	13.21 - 18.21	172	F #	3.28	± 28.4

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0412 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Gross Beta	pCi/L	11/09/2004	0001	13.21 - 18.21	73.1	F #	9.1	± 13.3
	pCi/L	11/09/2004	0002	13.21 - 18.21	54.8	F #	6.74	± 9.95
Iron	mg/L	11/16/1995	0001	13.21 - 18.21	0.40	#	0.03	-
	mg/L	12/04/1996	0001	13.21 - 18.21	8.540	#	-	-
	mg/L	12/04/1996	0002	13.21 - 18.21	2.700	#	-	-
	mg/L	11/12/1997	0001	13.21 - 18.21	1.800	#	-	-
	mg/L	10/11/1998	0001	13.21 - 18.21	3.000	#	-	-
	mg/L	10/11/1998	0002	13.21 - 18.21	2.620	#	-	-
	mg/L	09/26/1999	0001	13.21 - 18.21	1.080	L #	-	-
	mg/L	10/04/2000	0001	13.21 - 18.21	2.720	L #	0.0116	-
Magnesium	mg/L	11/16/1995	0001	13.21 - 18.21	82.1	#	0.1	-
	mg/L	12/04/1996	0001	13.21 - 18.21	84.000	#	-	-
	mg/L	12/04/1996	0002	13.21 - 18.21	82.500	#	-	-
	mg/L	11/12/1997	0001	13.21 - 18.21	75.300	#	-	-
	mg/L	10/11/1998	0001	13.21 - 18.21	79.300	#	-	-
	mg/L	10/11/1998	0002	13.21 - 18.21	79.400	#	-	-
	mg/L	09/26/1999	0001	13.21 - 18.21	74.600	L #	-	-
	mg/L	10/04/2000	0001	13.21 - 18.21	72.200	L #	0.0352	-
	mg/L	10/30/2001	0001	13.21 - 18.21	70.500	L #	0.0041	-
	mg/L	10/08/2002	0001	13.21 - 18.21	75.100	F #	0.011	-
	mg/L	10/08/2002	0002	13.21 - 18.21	76.200	F #	0.011	-
	mg/L	10/29/2003	0001	13.21 - 18.21	67.200	F #	0.005	-
	mg/L	11/09/2004	0001	13.21 - 18.21	67.000	F #	0.0042	-
	mg/L	11/09/2004	0002	13.21 - 18.21	69.000	F #	0.0042	-
Manganese	mg/L	11/16/1995	0001	13.21 - 18.21	22.0	#	0.01	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0412 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Manganese	mg/L	12/04/1996	0001	13.21 - 18.21	26.600		# -	-
	mg/L	12/04/1996	0002	13.21 - 18.21	23.800		# -	-
	mg/L	11/12/1997	0001	13.21 - 18.21	20.200		# -	-
	mg/L	10/11/1998	0001	13.21 - 18.21	22.700		# -	-
	mg/L	10/11/1998	0002	13.21 - 18.21	22.800		# -	-
	mg/L	09/26/1999	0001	13.21 - 18.21	20.400	L	# -	-
	mg/L	10/04/2000	0001	13.21 - 18.21	21.100	L	# 0.002	-
	mg/L	10/30/2001	0001	13.21 - 18.21	22.300	L	# 0.001	-
	mg/L	10/08/2002	0001	13.21 - 18.21	20.400	F	# 0.002	-
	mg/L	10/08/2002	0002	13.21 - 18.21	20.800	F	# 0.002	-
	mg/L	10/29/2003	0001	13.21 - 18.21	23.400	F	# 0.0005	-
	mg/L	11/09/2004	0001	13.21 - 18.21	25.000	F	# 0.00033	-
	mg/L	11/09/2004	0002	13.21 - 18.21	25.000	F	# 0.00033	-
Molybdenum	mg/L	11/16/1995	0001	13.21 - 18.21	0.01	U	# 0.01	-
	mg/L	12/04/1996	0001	13.21 - 18.21	0.0010	U	# 0.001	-
	mg/L	12/04/1996	0002	13.21 - 18.21	0.0010	U	# 0.001	-
	mg/L	11/12/1997	0001	13.21 - 18.21	0.0010	U	# 0.001	-
	mg/L	10/11/1998	0001	13.21 - 18.21	0.0011	B U	# -	-
	mg/L	10/11/1998	0002	13.21 - 18.21	0.0010	U	# 0.001	-
	mg/L	09/26/1999	0001	13.21 - 18.21	0.00080	U L	# 0.0008	-
	mg/L	10/04/2000	0001	13.21 - 18.21	0.00047	B UL	# 0.0004	-
	mg/L	10/30/2001	0001	13.21 - 18.21	0.0019	U L	# 0.0019	-
	mg/L	10/08/2002	0001	13.21 - 18.21	0.003	U F	# 0.003	-
	mg/L	10/08/2002	0002	13.21 - 18.21	0.003	U F	# 0.003	-
	mg/L	10/29/2003	0001	13.21 - 18.21	0.00850	U F	# 0.0085	-
	mg/L	11/09/2004	0001	13.21 - 18.21	0.001	UF	# 0.00017	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0412 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Molybdenum	mg/L	11/09/2004	0002	13.21 - 18.21	0.00083	B UF #	0.00017	-
Nitrate as NO3	mg/L	11/16/1995	N001	13.21 - 18.21	1	U #	1	-
	mg/L	12/04/1996	0001	13.21 - 18.21	0.0080	U #	0.008	-
	mg/L	12/04/1996	0002	13.21 - 18.21	0.0080	U #	0.008	-
ORP of Zobell Solution	mV	10/04/2000	N001	13.21 - 18.21	233	L #	-	-
	mV	10/30/2001	N001	13.21 - 18.21	239	L #	-	-
Oxidation Reduction Potent	mV	11/16/1995	N001	13.21 - 18.21	303	#	-	-
	mV	12/04/1996	N001	13.21 - 18.21	55	#	-	-
	mV	11/12/1997	N001	13.21 - 18.21	-1	#	-	-
	mV	10/11/1998	N001	13.21 - 18.21	-58	#	-	-
	mV	09/26/1999	N001	13.21 - 18.21	-69	L #	-	-
	mV	10/04/2000	N001	13.21 - 18.21	-25	L #	-	-
	mV	10/30/2001	N001	13.21 - 18.21	3	L #	-	-
	mV	10/08/2002	N001	13.21 - 18.21	40	F #	-	-
	mV	10/29/2003	N001	13.21 - 18.21	-40	F #	-	-
	mV	11/09/2004	N001	13.21 - 18.21	-26.6	F #	-	-
pH	s.u.	11/16/1995	N001	13.21 - 18.21	6.21	#	0.1	-
	s.u.	12/04/1996	N001	13.21 - 18.21	6.13	#	-	-
	s.u.	11/12/1997	N001	13.21 - 18.21	6.34	#	-	-
	s.u.	10/11/1998	N001	13.21 - 18.21	6.63	#	-	-
	s.u.	09/26/1999	N001	13.21 - 18.21	6.16	L #	-	-
	s.u.	10/04/2000	N001	13.21 - 18.21	6.23	L #	-	-
	s.u.	10/30/2001	N001	13.21 - 18.21	6.13	L #	-	-
	s.u.	10/08/2002	N001	13.21 - 18.21	6.72	F #	-	-
	s.u.	10/29/2003	N001	13.21 - 18.21	6.39	F #	-	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0412 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
pH	s.u.	11/09/2004	N001	13.21 - 18.21	6.56	F #	-	-
Potassium	mg/L	11/16/1995	0001	13.21 - 18.21	2.7	#	0.1	-
	mg/L	12/04/1996	0001	13.21 - 18.21	2.990	#	-	-
	mg/L	12/04/1996	0002	13.21 - 18.21	2.750	#	-	-
	mg/L	11/12/1997	0001	13.21 - 18.21	2.580	#	-	-
	mg/L	10/11/1998	0001	13.21 - 18.21	2.680	#	-	-
	mg/L	10/11/1998	0002	13.21 - 18.21	2.640	#	-	-
	mg/L	09/26/1999	0001	13.21 - 18.21	2.440	L #	-	-
	mg/L	10/04/2000	0001	13.21 - 18.21	2.430	L #	0.0327	-
	mg/L	10/30/2001	0001	13.21 - 18.21	2.330	E JL #	0.0151	-
	mg/L	10/08/2002	0001	13.21 - 18.21	2.750	F #	0.0259	-
	mg/L	10/08/2002	0002	13.21 - 18.21	2.620	F #	0.0259	-
	mg/L	10/29/2003	0001	13.21 - 18.21	2.720	F #	0.0091	-
	mg/L	11/09/2004	0001	13.21 - 18.21	5.100	F #	0.064	-
	mg/L	11/09/2004	0002	13.21 - 18.21	5.300	F #	0.064	-
Selenium	mg/L	11/12/1997	0001	13.21 - 18.21	0.0010	U #	0.001	-
	mg/L	09/26/1999	0001	13.21 - 18.21	0.00011	B L #	-	-
Sodium	mg/L	11/16/1995	0001	13.21 - 18.21	93	#	1	-
	mg/L	12/04/1996	0001	13.21 - 18.21	92.600	#	-	-
	mg/L	12/04/1996	0002	13.21 - 18.21	93.800	#	-	-
	mg/L	11/12/1997	0001	13.21 - 18.21	81.300	#	-	-
	mg/L	10/11/1998	0001	13.21 - 18.21	79.700	#	-	-
	mg/L	10/11/1998	0002	13.21 - 18.21	79.200	#	-	-
	mg/L	09/26/1999	0001	13.21 - 18.21	77.200	L #	-	-
	mg/L	10/04/2000	0001	13.21 - 18.21	74.200	L #	0.302	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0412 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Sodium	mg/L	10/30/2001	0001	13.21 - 18.21	70.500	L #	0.0074	-
	mg/L	10/08/2002	0001	13.21 - 18.21	73.100	F #	0.895	-
	mg/L	10/08/2002	0002	13.21 - 18.21	69.300	F #	0.895	-
	mg/L	10/29/2003	0001	13.21 - 18.21	50.100	F #	0.0064	-
	mg/L	11/09/2004	0001	13.21 - 18.21	36.000	F #	0.0046	-
	mg/L	11/09/2004	0002	13.21 - 18.21	37.000	F #	0.0046	-
Specific Conductance	umhos/cm	11/16/1995	N001	13.21 - 18.21	1865		# 1	-
	umhos/cm	12/04/1996	N001	13.21 - 18.21	2460		# -	-
	umhos/cm	11/12/1997	N001	13.21 - 18.21	2290		# -	-
	umhos/cm	10/11/1998	N001	13.21 - 18.21	2310		# -	-
	umhos/cm	09/26/1999	N001	13.21 - 18.21	2210	L #	-	-
	umhos/cm	10/04/2000	N001	13.21 - 18.21	2280	L #	-	-
	umhos/cm	10/30/2001	N001	13.21 - 18.21	2190	L #	-	-
	umhos/cm	10/08/2002	N001	13.21 - 18.21	2078	F #	-	-
	umhos/cm	10/29/2003	N001	13.21 - 18.21	2398	F #	-	-
	umhos/cm	11/09/2004	N001	13.21 - 18.21	3115	F #	-	-
Sulfate	mg/L	11/16/1995	0001	13.21 - 18.21	975		# 1	-
	mg/L	12/04/1996	0001	13.21 - 18.21	985.000		# -	-
	mg/L	12/04/1996	0002	13.21 - 18.21	1000.000		# -	-
	mg/L	11/12/1997	0001	13.21 - 18.21	969.000		# -	-
	mg/L	10/11/1998	0001	13.21 - 18.21	940.000		# -	-
	mg/L	10/11/1998	0002	13.21 - 18.21	941.000		# -	-
	mg/L	09/26/1999	0001	13.21 - 18.21	864.000	L #	-	-
	mg/L	10/04/2000	0001	13.21 - 18.21	935.000	L #	0.0589	-
	mg/L	10/30/2001	0001	13.21 - 18.21	1030.000	L #	0.818	-
	mg/L	10/08/2002	0001	13.21 - 18.21	998.000	F #	0.786	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0412 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Sulfate	mg/L	10/08/2002	0002	13.21 - 18.21	970.000	F #	0.786	-
	mg/L	10/29/2003	0001	13.21 - 18.21	893.000	F #	0.306	-
	mg/L	11/09/2004	0001	13.21 - 18.21	740	F #	10	-
	mg/L	11/09/2004	0002	13.21 - 18.21	760	F #	10	-
Temperature	C	11/16/1995	N001	13.21 - 18.21	12.3	#	0.1	-
	C	12/04/1996	N001	13.21 - 18.21	12.3	#	-	-
	C	11/12/1997	N001	13.21 - 18.21	12.4	#	-	-
	C	10/11/1998	N001	13.21 - 18.21	13.1	#	-	-
	C	09/26/1999	N001	13.21 - 18.21	12.4	L #	-	-
	C	10/04/2000	N001	13.21 - 18.21	13.1	L #	-	-
	C	10/30/2001	N001	13.21 - 18.21	12.8	L #	-	-
	C	10/08/2002	N001	13.21 - 18.21	13.2	F #	-	-
	C	10/29/2003	N001	13.21 - 18.21	12.08	F #	-	-
	C	11/09/2004	N001	13.21 - 18.21	11.65	F #	-	-
Temperature of Zobell Solu	C	10/04/2000	N001	13.21 - 18.21	17	L #	-	-
	C	10/30/2001	N001	13.21 - 18.21	13.1	L #	-	-
Total Dissolved Solids	mg/L	11/16/1995	0001	13.21 - 18.21	2170	#	10	-
	mg/L	12/04/1996	0001	13.21 - 18.21	2150	#	-	-
	mg/L	12/04/1996	0002	13.21 - 18.21	2140	#	-	-
	mg/L	11/12/1997	0001	13.21 - 18.21	1990	#	-	-
	mg/L	10/11/1998	0001	13.21 - 18.21	1980	#	-	-
	mg/L	10/11/1998	0002	13.21 - 18.21	2000	#	-	-
	mg/L	09/26/1999	0001	13.21 - 18.21	1870	L #	-	-
	mg/L	10/04/2000	0001	13.21 - 18.21	1880	L #	10	-
Turbidity	NTU	12/04/1996	N001	13.21 - 18.21	0.83	#	-	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0412 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Turbidity	NTU	11/12/1997	N001	13.21 - 18.21	1.30		#	-
	NTU	10/11/1998	N001	13.21 - 18.21	68.8		#	-
	NTU	09/26/1999	N001	13.21 - 18.21	6.02	L	#	-
	NTU	10/04/2000	N001	13.21 - 18.21	29.8	L	#	-
	NTU	10/30/2001	N001	13.21 - 18.21	4.84	L	#	-
	NTU	10/08/2002	N001	13.21 - 18.21	9.83	F	#	-
	NTU	10/29/2003	N001	13.21 - 18.21	4.07	F	#	-
	NTU	11/09/2004	N001	13.21 - 18.21	8.96	F	#	-
Uranium	mg/L	11/16/1995	0001	13.21 - 18.21	0.103		#	0.001
	mg/L	12/04/1996	0001	13.21 - 18.21	0.213		#	-
	mg/L	12/04/1996	0002	13.21 - 18.21	0.121		#	-
	mg/L	11/12/1997	0001	13.21 - 18.21	0.122		#	-
	mg/L	10/11/1998	0001	13.21 - 18.21	0.113		#	-
	mg/L	10/11/1998	0002	13.21 - 18.21	0.108		#	-
	mg/L	09/26/1999	0001	13.21 - 18.21	0.0544	L	#	-
	mg/L	10/04/2000	0001	13.21 - 18.21	0.0536	L	#	0.0001
	mg/L	10/30/2001	0001	13.21 - 18.21	0.0536	L	#	0.0001
	mg/L	10/08/2002	0001	13.21 - 18.21	0.0994	F	#	0.0001
	mg/L	10/08/2002	0002	13.21 - 18.21	0.102	F	#	0.0001
	mg/L	10/29/2003	0001	13.21 - 18.21	0.180	F	#	0.0001
	mg/L	11/09/2004	0001	13.21 - 18.21	0.220	F	#	8.3E-05
	mg/L	11/09/2004	0002	13.21 - 18.21	0.230	F	#	8.3E-05

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0412 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
-----------	-------	-----------------	----	-------------------------	--------	----------------------------	--------------------	------------------

RECORDS: SELECTED FROM USEE100 WHERE site_code='CAN01' AND location_code in ('0406','0406A','0410','0412','0413','0414','0414A','0414B','0424') AND quality_assurance = TRUE AND (data_validation_qualifiers IS NULL OR data_validation_qualifiers NOT LIKE '%R%' AND data_validation_qualifiers NOT LIKE '%X%') AND DATE_SAMPLED between #1/1/1995# and #12/31/2005#

SAMPLE ID CODES: 000X = Filtered sample (0.45 µm). N00X = Unfiltered sample. X = replicate number.

LAB QUALIFIERS:

- Replicate analysis not within control limits.
- + Correlation coefficient for MSA < 0.995.
- > Result above upper detection limit.
- A TIC is a suspected aldol-condensation product.
- B Inorganic: Result is between the IDL and CRDL. Organic: Analyte also found in method blank.
- C Pesticide result confirmed by GC-MS.
- D Analyte determined in diluted sample.
- E Inorganic: Estimate value because of interference, see case narrative. Organic: Analyte exceeded calibration range of the GC-MS.
- H Holding time expired, value suspect.
- I Increased detection limit due to required dilution.
- J Estimated
- M GFAA duplicate injection precision not met.
- N Inorganic or radiochemical: Spike sample recovery not within control limits. Organic: Tentatively identified compound (TIC).
- P > 25% difference in detected pesticide or Arochlor concentrations between 2 columns.
- S Result determined by method of standard addition (MSA).
- U Analytical result below detection limit.
- W Post-digestion spike outside control limits while sample absorbance < 50% of analytical spike absorbance.
- X Laboratory defined (USEPA CLP organic) qualifier, see case narrative.
- Y Laboratory defined (USEPA CLP organic) qualifier, see case narrative.
- Z Laboratory defined (USEPA CLP organic) qualifier, see case narrative.

DATA QUALIFIERS:

- | | | |
|--|--|--------------------|
| F Low flow sampling method used. | G Possible grout contamination, pH > 9. | J Estimated value. |
| L Less than 3 bore volumes purged prior to sampling. | Q Qualitative result due to sampling technique | R Unusable result. |
| U Parameter analyzed for but was not detected. | X Location is undefined. | |

QA QUALIFIER: # = validated according to Quality Assurance guidelines.

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0413 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Alkalinity, Total (As CaCO3	mg/L	11/18/1995	N001	6.05 - 11.05	99	F #	10	-
	mg/L	12/04/1996	0001	6.05 - 11.05	220	#	-	-
	mg/L	11/12/1997	N001	6.05 - 11.05	285	L #	-	-
	mg/L	10/11/1998	0001	6.05 - 11.05	336	L #	-	-
	mg/L	10/11/1998	N001	6.05 - 11.05	345	L #	-	-
	mg/L	09/25/1999	N001	6.05 - 11.05	291	L #	-	-
	mg/L	10/04/2000	0001	6.05 - 11.05	377	L #	-	-
	mg/L	10/04/2000	N001	6.05 - 11.05	355	L #	-	-
	mg/L	10/08/2002	0001	6.05 - 11.05	345	F #	-	-
	mg/L	10/28/2003	0001	6.05 - 11.05	317	F #	-	-
	mg/L	11/09/2004	0001	6.05 - 11.05	252	FQ #	-	-
Arsenic	mg/L	11/18/1995	0001	6.05 - 11.05	0.005	U F #	0.005	-
	mg/L	12/04/1996	0001	6.05 - 11.05	0.0020	B #	-	-
	mg/L	11/12/1997	0001	6.05 - 11.05	0.0015	B L #	-	-
	mg/L	10/11/1998	0001	6.05 - 11.05	0.0032	B L #	-	-
	mg/L	09/25/1999	0001	6.05 - 11.05	0.0016	B L #	-	-
	mg/L	10/04/2000	0001	6.05 - 11.05	0.0041	B L #	0.0002	-
Calcium	mg/L	11/18/1995	0001	6.05 - 11.05	123	F #	0.5	-
	mg/L	12/04/1996	0001	6.05 - 11.05	107.000	#	-	-
	mg/L	11/12/1997	0001	6.05 - 11.05	97.800	L #	-	-
	mg/L	10/11/1998	0001	6.05 - 11.05	124.000	L #	-	-
	mg/L	09/25/1999	0001	6.05 - 11.05	103.000	L #	-	-
	mg/L	10/04/2000	0001	6.05 - 11.05	116.000	L #	0.0481	-
	mg/L	10/30/2001	0001	6.05 - 11.05	114.000	L #	0.0653	-
	mg/L	10/08/2002	0001	6.05 - 11.05	123.000	F #	0.0446	-
	mg/L	10/28/2003	0001	6.05 - 11.05	118.000	F #	0.056	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0413 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Calcium	mg/L	11/09/2004	0001	6.05 - 11.05	110.000	FQ #	0.0026	-
Chloride	mg/L	11/18/1995	0001	6.05 - 11.05	22.8	F #	0.5	-
	mg/L	12/04/1996	0001	6.05 - 11.05	9.210	#	-	-
	mg/L	11/12/1997	0001	6.05 - 11.05	8.610	L #	-	-
	mg/L	10/11/1998	0001	6.05 - 11.05	14.300	L #	-	-
	mg/L	09/25/1999	0001	6.05 - 11.05	17.600	L #	-	-
	mg/L	10/04/2000	0001	6.05 - 11.05	22.700	L #	0.0239	-
	mg/L	10/30/2001	0001	6.05 - 11.05	22.300	L #	0.1865	-
	mg/L	10/08/2002	0001	6.05 - 11.05	24.600	F #	0.0401	-
	mg/L	10/28/2003	0001	6.05 - 11.05	6.850	F #	0.0231	-
	mg/L	11/09/2004	0001	6.05 - 11.05	3.7	FQ #	1	-
Dissolved Oxygen	mg/L	11/18/1995	N001	6.05 - 11.05	2.4	F #	0.6	-
Gross Alpha	pCi/L	11/09/2004	0001	6.05 - 11.05	70.4	FQ #	0.595	± 11.4
Gross Beta	pCi/L	11/09/2004	0001	6.05 - 11.05	31.4	FQ #	1.44	± 5.15
Iron	mg/L	11/18/1995	0001	6.05 - 11.05	3.95	F #	0.03	-
	mg/L	12/04/1996	0001	6.05 - 11.05	3.070	#	-	-
	mg/L	11/12/1997	0001	6.05 - 11.05	2.360	L #	-	-
	mg/L	10/11/1998	0001	6.05 - 11.05	0.671	L #	-	-
	mg/L	09/25/1999	0001	6.05 - 11.05	4.720	L #	-	-
	mg/L	10/04/2000	0001	6.05 - 11.05	7.310	L #	0.0116	-
Magnesium	mg/L	11/18/1995	0001	6.05 - 11.05	19.8	F #	0.1	-
	mg/L	12/04/1996	0001	6.05 - 11.05	16.400	#	-	-
	mg/L	11/12/1997	0001	6.05 - 11.05	14.900	L #	-	-
	mg/L	10/11/1998	0001	6.05 - 11.05	18.400	L #	-	-
	mg/L	09/25/1999	0001	6.05 - 11.05	15.200	L #	-	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0413 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Magnesium	mg/L	10/04/2000	0001	6.05 - 11.05	17.200	L #	0.0352	-
	mg/L	10/30/2001	0001	6.05 - 11.05	16.300	L #	0.0041	-
	mg/L	10/08/2002	0001	6.05 - 11.05	18.100	F #	0.011	-
	mg/L	10/28/2003	0001	6.05 - 11.05	17.400	F #	0.005	-
	mg/L	11/09/2004	0001	6.05 - 11.05	14.000	FQ #	0.0042	-
Manganese	mg/L	11/18/1995	0001	6.05 - 11.05	2.14	F #	0.01	-
	mg/L	12/04/1996	0001	6.05 - 11.05	1.490	#	-	-
	mg/L	11/12/1997	0001	6.05 - 11.05	1.300	L #	-	-
	mg/L	10/11/1998	0001	6.05 - 11.05	2.560	L #	-	-
	mg/L	09/25/1999	0001	6.05 - 11.05	2.140	L #	-	-
	mg/L	10/04/2000	0001	6.05 - 11.05	2.750	L #	0.002	-
	mg/L	10/30/2001	0001	6.05 - 11.05	2.610	L #	0.0001	-
	mg/L	10/08/2002	0001	6.05 - 11.05	2.910	F #	0.0002	-
	mg/L	10/28/2003	0001	6.05 - 11.05	0.912	F #	0.0001	-
Molybdenum	mg/L	11/09/2004	0001	6.05 - 11.05	0.044	FQ #	6.6E-05	-
	mg/L	11/18/1995	0001	6.05 - 11.05	0.01	U F #	0.01	-
	mg/L	12/04/1996	0001	6.05 - 11.05	0.0027	B #	-	-
	mg/L	11/12/1997	0001	6.05 - 11.05	0.0024	B L #	-	-
	mg/L	10/11/1998	0001	6.05 - 11.05	0.0034	B L #	-	-
	mg/L	09/25/1999	0001	6.05 - 11.05	0.0025	B L #	-	-
	mg/L	10/04/2000	0001	6.05 - 11.05	0.0029	B UL #	0.0004	-
	mg/L	10/30/2001	0001	6.05 - 11.05	0.0019	U L #	0.0019	-
	mg/L	10/08/2002	0001	6.05 - 11.05	0.003	U F #	0.003	-
	mg/L	10/28/2003	0001	6.05 - 11.05	0.00170	U F #	0.0017	-
	mg/L	11/09/2004	0001	6.05 - 11.05	0.0049	FQ #	0.00017	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0413 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Nitrate as NO3	mg/L	11/18/1995	N001	6.05 - 11.05	5	F #	1	-
	mg/L	12/04/1996	0001	6.05 - 11.05	1.530	#	-	-
ORP of Zobell Solution	mV	10/04/2000	N001	6.05 - 11.05	231	L #	-	-
	mV	10/30/2001	N001	6.05 - 11.05	239	L #	-	-
Oxidation Reduction Potent	mV	11/18/1995	N001	6.05 - 11.05	298	F #	-	-
	mV	12/04/1996	N001	6.05 - 11.05	79	#	-	-
	mV	11/12/1997	N001	6.05 - 11.05	123	L #	-	-
	mV	10/11/1998	N001	6.05 - 11.05	-124	L #	-	-
	mV	09/25/1999	N001	6.05 - 11.05	-111	L #	-	-
	mV	10/04/2000	N001	6.05 - 11.05	-92	L #	-	-
	mV	10/30/2001	N001	6.05 - 11.05	-84	L #	-	-
	mV	10/08/2002	N001	6.05 - 11.05	-6	F #	-	-
	mV	10/28/2003	N001	6.05 - 11.05	15	F #	-	-
	mV	11/09/2004	N001	6.05 - 11.05	99.0	FQ #	-	-
pH	s.u.	11/18/1995	N001	6.05 - 11.05	6.82	F #	0.1	-
	s.u.	12/04/1996	N001	6.05 - 11.05	6.76	#	-	-
	s.u.	11/12/1997	N001	6.05 - 11.05	7.00	L #	-	-
	s.u.	10/11/1998	N001	6.05 - 11.05	6.82	L #	-	-
	s.u.	09/25/1999	N001	6.05 - 11.05	6.77	L #	-	-
	s.u.	10/04/2000	N001	6.05 - 11.05	6.72	L #	-	-
	s.u.	10/30/2001	N001	6.05 - 11.05	6.73	L #	-	-
	s.u.	10/08/2002	N001	6.05 - 11.05	6.99	F #	-	-
	s.u.	10/28/2003	N001	6.05 - 11.05	6.61	F #	-	-
	s.u.	11/09/2004	N001	6.05 - 11.05	6.66	FQ #	-	-
Potassium	mg/L	11/18/1995	0001	6.05 - 11.05	4.3	F #	0.1	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0413 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Potassium	mg/L	12/04/1996	0001	6.05 - 11.05	4.510		# -	-
	mg/L	11/12/1997	0001	6.05 - 11.05	3.960	L	# -	-
	mg/L	10/11/1998	0001	6.05 - 11.05	4.370	L	# -	-
	mg/L	09/25/1999	0001	6.05 - 11.05	3.460	L	# -	-
	mg/L	10/04/2000	0001	6.05 - 11.05	3.930	L	# 0.0327	-
	mg/L	10/30/2001	0001	6.05 - 11.05	3.670	E JL	# 0.0151	-
	mg/L	10/08/2002	0001	6.05 - 11.05	4.090	F	# 0.0259	-
	mg/L	10/28/2003	0001	6.05 - 11.05	4.670	F	# 0.0091	-
Selenium	mg/L	11/09/2004	0001	6.05 - 11.05	6.100	FQ	# 0.064	-
	mg/L	11/12/1997	0001	6.05 - 11.05	0.0605	L	# -	-
Sodium	mg/L	09/25/1999	0001	6.05 - 11.05	0.00020	B L	# -	-
	mg/L	11/18/1995	0001	6.05 - 11.05	52	F	# 1	-
	mg/L	12/04/1996	0001	6.05 - 11.05	31.000		# -	-
	mg/L	11/12/1997	0001	6.05 - 11.05	26.700	L	# -	-
	mg/L	10/11/1998	0001	6.05 - 11.05	40.400	L	# -	-
	mg/L	09/25/1999	0001	6.05 - 11.05	30.600	L	# -	-
	mg/L	10/04/2000	0001	6.05 - 11.05	40.200	L	# 0.302	-
	mg/L	10/30/2001	0001	6.05 - 11.05	28.400	L	# 0.0074	-
	mg/L	10/08/2002	0001	6.05 - 11.05	32.800	F	# 0.895	-
	mg/L	10/28/2003	0001	6.05 - 11.05	19.000	F	# 0.0064	-
Specific Conductance	mg/L	11/09/2004	0001	6.05 - 11.05	8.900	FQ	# 0.0046	-
	umhos/cm	11/18/1995	N001	6.05 - 11.05	745	F	# 1	-
	umhos/cm	12/04/1996	N001	6.05 - 11.05	598		# -	-
	umhos/cm	11/12/1997	N001	6.05 - 11.05	598	L	# -	-
	umhos/cm	10/11/1998	N001	6.05 - 11.05	831	L	# -	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0413 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Specific Conductance	umhos/cm	09/25/1999	N001	6.05 - 11.05	742	L #	-	-
	umhos/cm	10/04/2000	N001	6.05 - 11.05	855	L #	-	-
	umhos/cm	10/30/2001	N001	6.05 - 11.05	798	L #	-	-
	umhos/cm	10/08/2002	N001	6.05 - 11.05	981	F #	-	-
	umhos/cm	10/28/2003	N001	6.05 - 11.05	703	F #	-	-
	umhos/cm	11/09/2004	N001	6.05 - 11.05	675	FQ #	-	-
Sulfate	mg/L	11/18/1995	0001	6.05 - 11.05	153	F #	1	-
	mg/L	12/04/1996	0001	6.05 - 11.05	83.800	#	-	-
	mg/L	11/12/1997	0001	6.05 - 11.05	74.100	L #	-	-
	mg/L	10/11/1998	0001	6.05 - 11.05	93.300	L #	-	-
	mg/L	09/25/1999	0001	6.05 - 11.05	73.300	L #	-	-
	mg/L	10/04/2000	0001	6.05 - 11.05	105.000	L #	0.0589	-
	mg/L	10/30/2001	0001	6.05 - 11.05	79.900	L #	0.2045	-
	mg/L	10/08/2002	0001	6.05 - 11.05	88.000	F #	0.0393	-
	mg/L	10/28/2003	0001	6.05 - 11.05	55.400	F #	0.0153	-
	mg/L	11/09/2004	0001	6.05 - 11.05	64	FQ #	2.5	-
Temperature	C	11/18/1995	N001	6.05 - 11.05	12.2	F #	0.1	-
	C	12/04/1996	N001	6.05 - 11.05	10.2	#	-	-
	C	11/12/1997	N001	6.05 - 11.05	11.9	L #	-	-
	C	10/11/1998	N001	6.05 - 11.05	15.8	L #	-	-
	C	09/25/1999	N001	6.05 - 11.05	15.4	L #	-	-
	C	10/04/2000	N001	6.05 - 11.05	15.8	L #	-	-
	C	10/30/2001	N001	6.05 - 11.05	14.4	L #	-	-
	C	10/08/2002	N001	6.05 - 11.05	15.93	F #	-	-
	C	10/28/2003	N001	6.05 - 11.05	13.84	F #	-	-
	C	11/09/2004	N001	6.05 - 11.05	12.61	FQ #	-	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0413 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Temperature of Zobell Solu	C	10/04/2000	N001	6.05 - 11.05	18.9	L #	-	-
	C	10/30/2001	N001	6.05 - 11.05	15.9	L #	-	-
Total Dissolved Solids	mg/L	11/18/1995	0001	6.05 - 11.05	660	F #	10	-
	mg/L	12/04/1996	0001	6.05 - 11.05	437	#	-	-
	mg/L	11/12/1997	0001	6.05 - 11.05	422	L #	-	-
	mg/L	10/11/1998	0001	6.05 - 11.05	515	L #	-	-
	mg/L	09/25/1999	0001	6.05 - 11.05	407	L #	-	-
	mg/L	10/04/2000	0001	6.05 - 11.05	530	L #	10	-
Turbidity	NTU	11/18/1995	N001	6.05 - 11.05	77	F #	1	-
	NTU	12/04/1996	N001	6.05 - 11.05	91.0	#	-	-
	NTU	11/12/1997	N001	6.05 - 11.05	228	L #	-	-
	NTU	10/11/1998	N001	6.05 - 11.05	25.2	L #	-	-
	NTU	09/25/1999	N001	6.05 - 11.05	35.2	L #	-	-
	NTU	10/04/2000	N001	6.05 - 11.05	6.64	L #	-	-
	NTU	10/30/2001	N001	6.05 - 11.05	29.9	L #	-	-
	NTU	10/08/2002	N001	6.05 - 11.05	6.95	F #	-	-
	NTU	10/28/2003	N001	6.05 - 11.05	9.63	F #	-	-
Uranium	mg/L	11/09/2004	N001	6.05 - 11.05	8.90	FQ #	-	-
	mg/L	11/18/1995	0001	6.05 - 11.05	0.232	F #	0.001	-
	mg/L	12/04/1996	0001	6.05 - 11.05	0.157	#	-	-
	mg/L	11/12/1997	0001	6.05 - 11.05	0.149	L #	-	-
	mg/L	10/11/1998	0001	6.05 - 11.05	0.140	L #	-	-
	mg/L	09/25/1999	0001	6.05 - 11.05	0.164	L #	-	-
	mg/L	10/04/2000	0001	6.05 - 11.05	0.139	L #	0.0001	-
	mg/L	10/30/2001	0001	6.05 - 11.05	0.0914	L #	0.0001	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0413 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN-CERTAINTY
Uranium	mg/L	10/08/2002	0001	6.05 - 11.05	0.134	F #	0.0001	-
	mg/L	10/28/2003	0001	6.05 - 11.05	0.197	F #	0.0001	-
	mg/L	11/09/2004	0001	6.05 - 11.05	0.170	FQ #	8.3E-05	-

RECORDS: SELECTED FROM USEE100 WHERE site_code='CAN01' AND location_code in ('0406','0406A','0410','0412','0413','0414','0414A','0414B','0424') AND quality_assurance = TRUE AND (data_validation_qualifiers IS NULL OR data_validation_qualifiers NOT LIKE '%R%' AND data_validation_qualifiers NOT LIKE '%X%') AND DATE_SAMPLED between #1/1/1995# and #12/31/2005#

SAMPLE ID CODES: 000X = Filtered sample (0.45 µm). N00X = Unfiltered sample. X = replicate number.

LAB QUALIFIERS:

- * Replicate analysis not within control limits.
- + Correlation coefficient for MSA < 0.995.
- > Result above upper detection limit.
- A TIC is a suspected aldol-condensation product.
- B Inorganic: Result is between the IDL and CRDL. Organic: Analyte also found in method blank.
- C Pesticide result confirmed by GC-MS.
- D Analyte determined in diluted sample.
- E Inorganic: Estimate value because of interference, see case narrative. Organic: Analyte exceeded calibration range of the GC-MS.
- H Holding time expired, value suspect.
- I Increased detection limit due to required dilution.
- J Estimated
- M GFAA duplicate injection precision not met.
- N Inorganic or radiochemical: Spike sample recovery not within control limits. Organic: Tentatively identified compound (TIC).
- P > 25% difference in detected pesticide or Arochlor concentrations between 2 columns.
- S Result determined by method of standard addition (MSA).
- U Analytical result below detection limit.
- W Post-digestion spike outside control limits while sample absorbance < 50% of analytical spike absorbance.
- X Laboratory defined (USEPA CLP organic) qualifier, see case narrative.
- Y Laboratory defined (USEPA CLP organic) qualifier, see case narrative.
- Z Laboratory defined (USEPA CLP organic) qualifier, see case narrative.

DATA QUALIFIERS:

- F Low flow sampling method used.
- G Possible grout contamination, pH > 9.
- J Estimated value.
- L Less than 3 bore volumes purged prior to sampling.
- Q Qualitative result due to sampling technique
- R Unusable result.
- U Parameter analyzed for but was not detected.
- X Location is undefined.

QA QUALIFIER: # = validated according to Quality Assurance guidelines.

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0414 <well> Well was replaced by 0414A.

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Alkalinity, Total (As CaCO3	mg/L	11/18/1995	N001	4.28 - 14.28	183	F #	10	-
	mg/L	12/05/1996	0001	4.28 - 14.28	161	#	-	-
	mg/L	11/11/1997	N001	4.28 - 14.28	179	L #	-	-
	mg/L	10/10/1998	0001	4.28 - 14.28	153	L #	-	-
	mg/L	10/10/1998	N001	4.28 - 14.28	181	L #	-	-
	mg/L	09/25/1999	0001	4.28 - 14.28	114	L #	-	-
	mg/L	09/25/1999	N001	4.28 - 14.28	134	L #	-	-
	mg/L	10/03/2000	0001	4.28 - 14.28	183	L #	-	-
	mg/L	10/03/2000	N001	4.28 - 14.28	130	L #	-	-
Arsenic	mg/L	11/18/1995	0001	4.28 - 14.28	0.005	U F #	0.005	-
	mg/L	12/05/1996	0001	4.28 - 14.28	0.00051	B #	-	-
	mg/L	11/11/1997	0001	4.28 - 14.28	0.0010	U L #	0.001	-
	mg/L	10/10/1998	0001	4.28 - 14.28	0.0056	L #	-	-
	mg/L	09/25/1999	0001	4.28 - 14.28	0.0019	B L #	-	-
	mg/L	10/03/2000	0001	4.28 - 14.28	0.0052	L #	0.0002	-
Calcium	mg/L	11/18/1995	0001	4.28 - 14.28	73.1	F #	0.5	-
	mg/L	12/05/1996	0001	4.28 - 14.28	79.200	#	-	-
	mg/L	11/11/1997	0001	4.28 - 14.28	70.100	L #	-	-
	mg/L	10/10/1998	0001	4.28 - 14.28	76.700	L #	-	-
	mg/L	09/25/1999	0001	4.28 - 14.28	65.700	L #	-	-
	mg/L	10/03/2000	0001	4.28 - 14.28	75.700	L #	0.0481	-
Chloride	mg/L	11/18/1995	0001	4.28 - 14.28	8.6	F #	0.5	-
	mg/L	12/05/1996	0001	4.28 - 14.28	3.390	#	-	-
	mg/L	11/11/1997	0001	4.28 - 14.28	3.710	L #	-	-
	mg/L	10/10/1998	0001	4.28 - 14.28	4.790	L #	-	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0414 <well> Well was replaced by 0414A.

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Chloride	mg/L	09/25/1999	0001	4.28 - 14.28	3.130	L #	-	-
	mg/L	10/03/2000	0001	4.28 - 14.28	3.830	L #	0.0239	-
Dissolved Oxygen	mg/L	11/18/1995	N001	4.28 - 14.28	8.1	F #	0.6	-
Iron	mg/L	11/18/1995	0001	4.28 - 14.28	0.03	U F #	0.03	-
	mg/L	12/05/1996	0001	4.28 - 14.28	0.782	#	-	-
	mg/L	11/11/1997	0001	4.28 - 14.28	0.341	L #	-	-
	mg/L	10/10/1998	0001	4.28 - 14.28	3.430	L #	-	-
	mg/L	09/25/1999	0001	4.28 - 14.28	1.360	L #	-	-
	mg/L	10/03/2000	0001	4.28 - 14.28	1.660	L #	0.0116	-
Magnesium	mg/L	11/18/1995	0001	4.28 - 14.28	12.6	F #	0.1	-
	mg/L	12/05/1996	0001	4.28 - 14.28	11.600	#	-	-
	mg/L	11/11/1997	0001	4.28 - 14.28	10.500	L #	-	-
	mg/L	10/10/1998	0001	4.28 - 14.28	11.600	L #	-	-
	mg/L	09/25/1999	0001	4.28 - 14.28	9.780	L #	-	-
	mg/L	10/03/2000	0001	4.28 - 14.28	11.200	L #	0.0352	-
Manganese	mg/L	11/18/1995	0001	4.28 - 14.28	0.46	F #	0.01	-
	mg/L	12/05/1996	0001	4.28 - 14.28	2.360	#	-	-
	mg/L	11/11/1997	0001	4.28 - 14.28	1.670	L #	-	-
	mg/L	10/10/1998	0001	4.28 - 14.28	2.440	L #	-	-
	mg/L	09/25/1999	0001	4.28 - 14.28	1.710	L #	-	-
	mg/L	10/03/2000	0001	4.28 - 14.28	3.120	L #	0.002	-
Molybdenum	mg/L	11/18/1995	0001	4.28 - 14.28	0.03	F #	0.01	-
	mg/L	12/05/1996	0001	4.28 - 14.28	0.0085	B #	-	-
	mg/L	11/11/1997	0001	4.28 - 14.28	0.0127	L #	-	-
	mg/L	10/10/1998	0001	4.28 - 14.28	0.0190	L #	-	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0414 <well> Well was replaced by 0414A.

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Molybdenum	mg/L	09/25/1999	0001	4.28 - 14.28	0.0108	L #	-	-
	mg/L	10/03/2000	0001	4.28 - 14.28	0.0168	L #	0.0004	-
Nitrate as NO3	mg/L	11/18/1995	N001	4.28 - 14.28	1	U F #	1	-
	mg/L	12/05/1996	0001	4.28 - 14.28	0.570	B #	-	-
ORP of Zobell Solution	mV	10/03/2000	N001	4.28 - 14.28	224	L #	-	-
Oxidation Reduction Potent	mV	11/18/1995	N001	4.28 - 14.28	393	F #	-	-
	mV	12/05/1996	N001	4.28 - 14.28	92	#	-	-
	mV	11/11/1997	N001	4.28 - 14.28	176	L #	-	-
	mV	10/10/1998	N001	4.28 - 14.28	-120	L #	-	-
	mV	09/25/1999	N001	4.28 - 14.28	-98	L #	-	-
	mV	10/03/2000	N001	4.28 - 14.28	-38	L #	-	-
pH	s.u.	11/18/1995	N001	4.28 - 14.28	6.45	F #	0.1	-
	s.u.	12/05/1996	N001	4.28 - 14.28	6.36	#	-	-
	s.u.	11/11/1997	N001	4.28 - 14.28	6.88	L #	-	-
	s.u.	10/10/1998	N001	4.28 - 14.28	5.98	L #	-	-
	s.u.	09/25/1999	N001	4.28 - 14.28	6.44	L #	-	-
	s.u.	10/03/2000	N001	4.28 - 14.28	6.08	L #	-	-
Potassium	mg/L	11/18/1995	0001	4.28 - 14.28	3.2	F #	0.1	-
	mg/L	12/05/1996	0001	4.28 - 14.28	1.860	#	-	-
	mg/L	11/11/1997	0001	4.28 - 14.28	2.110	L #	-	-
	mg/L	10/10/1998	0001	4.28 - 14.28	1.960	L #	-	-
	mg/L	09/25/1999	0001	4.28 - 14.28	1.560	L #	-	-
	mg/L	10/03/2000	0001	4.28 - 14.28	1.990	L #	0.0327	-
Selenium	mg/L	11/11/1997	0001	4.28 - 14.28	0.0010	U L #	0.001	-
	mg/L	09/25/1999	0001	4.28 - 14.28	0.00023	B L #	-	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0414 <well> Well was replaced by 0414A.

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Sodium	mg/L	11/18/1995	0001	4.28 - 14.28	19	F #	1	-
	mg/L	12/05/1996	0001	4.28 - 14.28	5.960	#	-	-
	mg/L	11/11/1997	0001	4.28 - 14.28	6.670	L #	-	-
	mg/L	10/10/1998	0001	4.28 - 14.28	6.620	L #	-	-
	mg/L	09/25/1999	0001	4.28 - 14.28	4.320	L #	-	-
	mg/L	10/03/2000	0001	4.28 - 14.28	5.850	L #	0.302	-
Specific Conductance	umhos/cm	11/18/1995	N001	4.28 - 14.28	397	F #	1	-
	umhos/cm	12/05/1996	N001	4.28 - 14.28	493	#	-	-
	umhos/cm	11/11/1997	N001	4.28 - 14.28	474	L #	-	-
	umhos/cm	10/10/1998	N001	4.28 - 14.28	505	L #	-	-
	umhos/cm	09/25/1999	N001	4.28 - 14.28	376	L #	-	-
	umhos/cm	10/03/2000	N001	4.28 - 14.28	512	L #	-	-
Sulfate	mg/L	11/18/1995	0001	4.28 - 14.28	85	F #	1	-
	mg/L	12/05/1996	0001	4.28 - 14.28	97.100	#	-	-
	mg/L	11/11/1997	0001	4.28 - 14.28	75.700	L #	-	-
	mg/L	10/10/1998	0001	4.28 - 14.28	72.800	L #	-	-
	mg/L	09/25/1999	0001	4.28 - 14.28	77.500	L #	-	-
	mg/L	10/03/2000	0001	4.28 - 14.28	111.000	L #	0.0589	-
Temperature	C	11/18/1995	N001	4.28 - 14.28	12.4	F #	0.1	-
	C	12/05/1996	N001	4.28 - 14.28	11.0	#	-	-
	C	11/11/1997	N001	4.28 - 14.28	12.1	L #	-	-
	C	10/10/1998	N001	4.28 - 14.28	14.5	L #	-	-
	C	09/25/1999	N001	4.28 - 14.28	13.7	L #	-	-
	C	10/03/2000	N001	4.28 - 14.28	14.8	L #	-	-
Temperature of Zobell Solu	C	10/03/2000	N001	4.28 - 14.28	22.2	L #	-	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0414 <well> Well was replaced by 0414A.

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE:		DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS:			DETECTION LIMIT	UN- CERTAINTY
		DATE	ID			LAB	DATA	QA		
Total Dissolved Solids	mg/L	11/18/1995	0001	4.28 - 14.28	380			F #	10	-
	mg/L	12/05/1996	0001	4.28 - 14.28	18.0			#	-	-
	mg/L	11/11/1997	0001	4.28 - 14.28	313			L #	-	-
	mg/L	10/10/1998	0001	4.28 - 14.28	315			L #	-	-
	mg/L	09/25/1999	0001	4.28 - 14.28	253			L #	-	-
	mg/L	10/03/2000	0001	4.28 - 14.28	320			L #	10	-
Turbidity	NTU	11/18/1995	N001	4.28 - 14.28	49			F #	1	-
	NTU	12/05/1996	N001	4.28 - 14.28	42.4			#	-	-
	NTU	11/11/1997	N001	4.28 - 14.28	1000	>		L #	-	-
	NTU	10/10/1998	N001	4.28 - 14.28	371			L #	-	-
	NTU	09/25/1999	N001	4.28 - 14.28	123			L #	-	-
	NTU	10/03/2000	N001	4.28 - 14.28	1000	>		L #	-	-
Uranium	mg/L	11/18/1995	0001	4.28 - 14.28	0.185			F #	0.001	-
	mg/L	12/05/1996	0001	4.28 - 14.28	0.0317			#	-	-
	mg/L	11/11/1997	0001	4.28 - 14.28	0.0814			L #	-	-
	mg/L	10/10/1998	0001	4.28 - 14.28	0.0441			L #	-	-
	mg/L	09/25/1999	0001	4.28 - 14.28	0.0187			L #	-	-
	mg/L	10/03/2000	0001	4.28 - 14.28	0.0265			L #	0.0001	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0414 <well> Well was replaced by 0414A.

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
-----------	-------	-----------------	----	-------------------------	--------	----------------------------	--------------------	------------------

RECORDS: SELECTED FROM USEE100 WHERE site_code='CAN01' AND location_code in('0406','0406A','0410','0412','0413','0414','0414A','0414B','0424') AND quality_assurance = TRUE AND (data_validation_qualifiers IS NULL OR data_validation_qualifiers NOT LIKE '%R%' AND data_validation_qualifiers NOT LIKE '%X%') AND DATE_SAMPLED between #1/1/1995# and #12/31/2005#

SAMPLE ID CODES: 000X = Filtered sample (0.45 µm). N00X = Unfiltered sample. X = replicate number.

LAB QUALIFIERS:

- Replicate analysis not within control limits.
- + Correlation coefficient for MSA < 0.995.
- > Result above upper detection limit.
- A TIC is a suspected aldol-condensation product.
- B Inorganic: Result is between the IDL and CRDL. Organic: Analyte also found in method blank.
- C Pesticide result confirmed by GC-MS.
- D Analyte determined in diluted sample.
- E Inorganic: Estimate value because of interference, see case narrative. Organic: Analyte exceeded calibration range of the GC-MS.
- H Holding time expired, value suspect.
- I Increased detection limit due to required dilution.
- J Estimated.
- M GFAA duplicate injection precision not met.
- N Inorganic or radiochemical: Spike sample recovery not within control limits. Organic: Tentatively identified compound (TIC).
- P > 25% difference in detected pesticide or Arochlor concentrations between 2 columns.
- S Result determined by method of standard addition (MSA).
- U Analytical result below detection limit.
- W Post-digestion spike outside control limits while sample absorbance < 50% of analytical spike absorbance.
- X Laboratory defined (USEPA CLP organic) qualifier, see case narrative.
- Y Laboratory defined (USEPA CLP organic) qualifier, see case narrative.
- Z Laboratory defined (USEPA CLP organic) qualifier, see case narrative.

DATA QUALIFIERS:

- | | | |
|--|--|--------------------|
| F Low flow sampling method used. | G Possible grout contamination, pH > 9. | J Estimated value. |
| L Less than 3 bore volumes purged prior to sampling. | Q Qualitative result due to sampling technique | R Unusable result. |
| U Parameter analyzed for but was not detected. | X Location is undefined. | |

QA QUALIFIER: # = validated according to Quality Assurance guidelines.

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site
LOCATION: 0414A <well> Well was replaced by 0414B.
REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN-CERTAINTY
Alkalinity, Total (As CaCO3	mg/L	10/08/2002	0001	4.31 - 14.43	235	FQ #	-	-
	mg/L	10/28/2003	0001	4.31 - 14.43	222	F #	-	-
Calcium	mg/L	10/30/2001	0001	4.31 - 14.43	103.000	L #	0.0653	-
	mg/L	10/08/2002	0001	4.31 - 14.43	107.000	FQ #	0.0446	-
	mg/L	10/28/2003	0001	4.31 - 14.43	109.000	F #	0.056	-
Chloride	mg/L	10/30/2001	0001	4.31 - 14.43	17.700	L #	0.1865	-
	mg/L	10/08/2002	0001	4.31 - 14.43	9.470	FQ #	0.0802	-
	mg/L	10/28/2003	0001	4.31 - 14.43	5.540	F #	0.231	-
Magnesium	mg/L	10/30/2001	0001	4.31 - 14.43	19.300	L #	0.0041	-
	mg/L	10/08/2002	0001	4.31 - 14.43	19.300	FQ #	0.011	-
	mg/L	10/28/2003	0001	4.31 - 14.43	20.000	F #	0.005	-
Manganese	mg/L	10/30/2001	0001	4.31 - 14.43	7.010	L #	0.0001	-
	mg/L	10/08/2002	0001	4.31 - 14.43	9.460	FQ #	0.0002	-
	mg/L	10/28/2003	0001	4.31 - 14.43	8.090	F #	0.0001	-
Molybdenum	mg/L	10/30/2001	0001	4.31 - 14.43	0.0019	U L #	0.0019	-
	mg/L	10/08/2002	0001	4.31 - 14.43	0.003	U FQ #	0.003	-
	mg/L	10/28/2003	0001	4.31 - 14.43	0.00170	U F #	0.0017	-
ORP of Zobell Solution	mV	10/30/2001	N001	4.31 - 14.43	243	L #	-	-
Oxidation Reduction Potent	mV	10/30/2001	N001	4.31 - 14.43	-40	L #	-	-
	mV	10/08/2002	N001	4.31 - 14.43	-1.8	FQ #	-	-
	mV	10/28/2003	N001	4.31 - 14.43	14	F #	-	-
pH	s.u.	10/30/2001	N001	4.31 - 14.43	6.58	L #	-	-
	s.u.	10/08/2002	N001	4.31 - 14.43	6.92	FQ #	-	-
	s.u.	10/28/2003	N001	4.31 - 14.43	6.55	F #	-	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0414A <well> Well was replaced by 0414B.

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN-CERTAINTY
Potassium	mg/L	10/30/2001	0001	4.31 - 14.43	1.490	E JL #	0.0151	-
	mg/L	10/08/2002	0001	4.31 - 14.43	1.640	FQ #	0.0259	-
	mg/L	10/28/2003	0001	4.31 - 14.43	1.480	F #	0.0091	-
Sodium	mg/L	10/30/2001	0001	4.31 - 14.43	10.200	L #	0.0074	-
	mg/L	10/08/2002	0001	4.31 - 14.43	14.600	FQ #	0.895	-
	mg/L	10/28/2003	0001	4.31 - 14.43	19.500	F #	0.0064	-
Specific Conductance	umhos/cm	10/30/2001	N001	4.31 - 14.43	715	L #	-	-
	umhos/cm	10/08/2002	N001	4.31 - 14.43	835	FQ #	-	-
	umhos/cm	10/28/2003	N001	4.31 - 14.43	761	F #	-	-
Sulfate	mg/L	10/30/2001	0001	4.31 - 14.43	124.000	L #	0.2045	-
	mg/L	10/08/2002	0001	4.31 - 14.43	138.000	FQ #	0.0786	-
	mg/L	10/28/2003	0001	4.31 - 14.43	185.000	F #	0.153	-
Temperature	C	10/30/2001	N001	4.31 - 14.43	13.5	L #	-	-
	C	10/08/2002	N001	4.31 - 14.43	14.77	FQ #	-	-
	C	10/28/2003	N001	4.31 - 14.43	13.24	F #	-	-
Temperature of Zobell Solu	C	10/30/2001	N001	4.31 - 14.43	10.6	L #	-	-
Turbidity	NTU	10/30/2001	N001	4.31 - 14.43	1000	> L #	-	-
	NTU	10/08/2002	N001	4.31 - 14.43	3.28	FQ #	-	-
	NTU	10/28/2003	N001	4.31 - 14.43	4.4	F #	-	-
Uranium	mg/L	10/30/2001	0001	4.31 - 14.43	0.0019	UL #	0.0001	-
	mg/L	10/08/2002	0001	4.31 - 14.43	0.0025	FQ #	0.0001	-
	mg/L	10/28/2003	0001	4.31 - 14.43	0.00590	F #	0.0001	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0414A <well> Well was replaced by 0414B.

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
-----------	-------	-----------------	----	-------------------------	--------	----------------------------	--------------------	------------------

RECORDS: SELECTED FROM USEE100 WHERE site_code='CAN01' AND location_code in('0406','0406A','0410','0412','0413','0414','0414A','0414B','0424') AND quality_assurance = TRUE AND (data_validation_qualifiers IS NULL OR data_validation_qualifiers NOT LIKE '%R%' AND data_validation_qualifiers NOT LIKE '%X%') AND DATE_SAMPLED between #1/1/1995# and #12/31/2005#

SAMPLE ID CODES: 000X = Filtered sample (0.45 µm). N00X = Unfiltered sample. X = replicate number.

LAB QUALIFIERS:

- Replicate analysis not within control limits.
- + Correlation coefficient for MSA < 0.995.
- > Result above upper detection limit.
- A TIC is a suspected aldol-condensation product.
- B Inorganic: Result is between the IDL and CRDL. Organic: Analyte also found in method blank.
- C Pesticide result confirmed by GC-MS.
- D Analyte determined in diluted sample.
- E Inorganic: Estimate value because of interference, see case narrative. Organic: Analyte exceeded calibration range of the GC-MS.
- H Holding time expired, value suspect.
- I Increased detection limit due to required dilution.
- J Estimated
- M GFAA duplicate injection precision not met.
- N Inorganic or radiochemical: Spike sample recovery not within control limits. Organic: Tentatively identified compound (TIC).
- P > 25% difference in detected pesticide or Arochlor concentrations between 2 columns.
- S Result determined by method of standard addition (MSA).
- U Analytical result below detection limit.
- W Post-digestion spike outside control limits while sample absorbance < 50% of analytical spike absorbance.
- X Laboratory defined (USEPA CLP organic) qualifier, see case narrative.
- Y Laboratory defined (USEPA CLP organic) qualifier, see case narrative.
- Z Laboratory defined (USEPA CLP organic) qualifier, see case narrative.

DATA QUALIFIERS:

- | | | |
|--|--|--------------------|
| F Low flow sampling method used. | G Possible grout contamination, pH > 9. | J Estimated value. |
| L Less than 3 bore volumes purged prior to sampling. | Q Qualitative result due to sampling technique | R Unusable result. |
| U Parameter analyzed for but was not detected. | X Location is undefined. | |

QA QUALIFIER: # = validated according to Quality Assurance guidelines.

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0414B <well> Replacement well for 0414A.

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Alkalinity, Total (As CaCO ₃)	mg/L	11/09/2004	0001		204	F #	-	-
Calcium	mg/L	11/09/2004	0001		100.000	F #	0.0026	-
Chloride	mg/L	11/09/2004	0001		6.5	F #	1	-
Gross Alpha	pCi/L	11/09/2004	0001		0.724	U F #	0.724	± 0.43
Gross Beta	pCi/L	11/09/2004	0001		3.1	FJ #	1.12	± 0.88
Magnesium	mg/L	11/09/2004	0001		18.000	F #	0.0042	-
Manganese	mg/L	11/09/2004	0001		8.000	F #	6.6E-05	-
Molybdenum	mg/L	11/09/2004	0001		0.00056	B UF #	0.00017	-
Oxidation Reduction Potent	mV	11/09/2004	N001		42.9	F #	-	-
pH	s.u.	11/09/2004	N001		6.42	F #	-	-
Potassium	mg/L	11/09/2004	0001		3.000	F #	0.064	-
Sodium	mg/L	11/09/2004	0001		8.300	F #	0.0046	-
Specific Conductance	umhos/cm	11/09/2004	N001		673	F #	-	-
Sulfate	mg/L	11/09/2004	0001		120	F #	2.5	-
Temperature	C	11/09/2004	N001		11.71	F #	-	-
Turbidity	NTU	11/09/2004	N001		9.47	F #	-	-
Uranium	mg/L	11/09/2004	0001		0.00078	F #	8.3E-06	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0414B <well> Replacement well for 0414A.

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
-----------	-------	-----------------	----	-------------------------	--------	----------------------------	--------------------	------------------

RECORDS: SELECTED FROM USEE100 WHERE site_code='CAN01' AND location_code in ('0406','0406A','0410','0412','0413','0414','0414A','0414B','0424') AND quality_assurance = TRUE AND (data_validation_qualifiers IS NULL OR data_validation_qualifiers NOT LIKE '%R%' AND data_validation_qualifiers NOT LIKE '%X%') AND DATE_SAMPLED between #1/1/1995# and #12/31/2005#

SAMPLE ID CODES: 000X = Filtered sample (0.45 µm). N00X = Unfiltered sample. X = replicate number.

LAB QUALIFIERS:

- * Replicate analysis not within control limits.
- + Correlation coefficient for MSA < 0.995.
- > Result above upper detection limit.
- A TIC is a suspected aldol-condensation product.
- B Inorganic: Result is between the IDL and CRDL. Organic: Analyte also found in method blank.
- C Pesticide result confirmed by GC-MS.
- D Analyte determined in diluted sample.
- E Inorganic: Estimate value because of interference, see case narrative. Organic: Analyte exceeded calibration range of the GC-MS.
- H Holding time expired, value suspect.
- I Increased detection limit due to required dilution.
- J Estimated
- M GFAA duplicate injection precision not met.
- N Inorganic or radiochemical: Spike sample recovery not within control limits. Organic: Tentatively identified compound (TIC).
- P > 25% difference in detected pesticide or Arochlor concentrations between 2 columns.
- S Result determined by method of standard addition (MSA).
- U Analytical result below detection limit.
- W Post-digestion spike outside control limits while sample absorbance < 50% of analytical spike absorbance.
- X Laboratory defined (USEPA CLP organic) qualifier, see case narrative.
- Y Laboratory defined (USEPA CLP organic) qualifier, see case narrative.
- Z Laboratory defined (USEPA CLP organic) qualifier, see case narrative.

DATA QUALIFIERS:

- | | | |
|--|--|--------------------|
| F Low flow sampling method used. | G Possible grout contamination, pH > 9. | J Estimated value. |
| L Less than 3 bore volumes purged prior to sampling. | Q Qualitative result due to sampling technique | R Unusable result. |
| U Parameter analyzed for but was not detected. | X Location is undefined. | |

QA QUALIFIER: # = validated according to Quality Assurance guidelines.

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0424 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Alkalinity, Total (As CaCO ₃)	mg/L	11/18/1995	N001	7.58 - 12.58	386		# 10	-
	mg/L	12/06/1996	0001	7.58 - 12.58	327		#	-
	mg/L	11/11/1997	N001	7.58 - 12.58	411		#	-
	mg/L	10/10/1998	0001	7.58 - 12.58	381		#	-
	mg/L	10/10/1998	N001	7.58 - 12.58	386		#	-
	mg/L	09/25/1999	0001	7.58 - 12.58	404	L	#	-
	mg/L	09/25/1999	N001	7.58 - 12.58	405	L	#	-
	mg/L	10/03/2000	0001	7.58 - 12.58	395	L	#	-
	mg/L	10/03/2000	N001	7.58 - 12.58	432	L	#	-
	mg/L	10/08/2002	0001	7.58 - 12.58	347	F	#	-
	mg/L	10/28/2003	0001	7.58 - 12.58	373	F	#	-
	mg/L	11/09/2004	0001	7.58 - 12.58	399	F	#	-
Arsenic	mg/L	11/18/1995	0001	7.58 - 12.58	0.006		# 0.005	-
	mg/L	11/18/1995	0002	7.58 - 12.58	0.006		# 0.005	-
	mg/L	12/06/1996	0001	7.58 - 12.58	0.0062		#	-
	mg/L	11/11/1997	0001	7.58 - 12.58	0.0051		#	-
	mg/L	11/11/1997	0002	7.58 - 12.58	0.0064		#	-
	mg/L	10/10/1998	0001	7.58 - 12.58	0.0098		#	-
	mg/L	09/25/1999	0001	7.58 - 12.58	0.0080	L	#	-
	mg/L	10/03/2000	0001	7.58 - 12.58	0.0054	L	# 0.0002	-
	mg/L	10/03/2000	0002	7.58 - 12.58	0.0058	L	# 0.0002	-
Calcium	mg/L	11/18/1995	0001	7.58 - 12.58	95.9		# 0.5	-
	mg/L	11/18/1995	0002	7.58 - 12.58	97.0		# 0.5	-
	mg/L	12/06/1996	0001	7.58 - 12.58	105.000		#	-
	mg/L	11/11/1997	0001	7.58 - 12.58	104.000		#	-
	mg/L	11/11/1997	0002	7.58 - 12.58	104.000		#	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0424 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Calcium	mg/L	10/10/1998	0001	7.58 - 12.58	105.000		# -	-
	mg/L	09/25/1999	0001	7.58 - 12.58	98.200	L	# -	-
	mg/L	10/03/2000	0001	7.58 - 12.58	95.500	L	# 0.0481	-
	mg/L	10/03/2000	0002	7.58 - 12.58	94.000	L	# 0.0481	-
	mg/L	10/30/2001	0001	7.58 - 12.58	100.000	L	# 0.0653	-
	mg/L	10/30/2001	0002	7.58 - 12.58	100.000	L	# 0.0653	-
	mg/L	10/08/2002	0001	7.58 - 12.58	99.100	F	# 0.0446	-
	mg/L	10/28/2003	0001	7.58 - 12.58	93.000	F	# 0.056	-
	mg/L	11/09/2004	0001	7.58 - 12.58	100.000	F	# 0.0026	-
Chloride	mg/L	11/18/1995	0001	7.58 - 12.58	139		# 0.5	-
	mg/L	11/18/1995	0002	7.58 - 12.58	138		# 0.5	-
	mg/L	12/06/1996	0001	7.58 - 12.58	139.000		# -	-
	mg/L	11/11/1997	0001	7.58 - 12.58	131.000		# -	-
	mg/L	11/11/1997	0002	7.58 - 12.58	132.000		# -	-
	mg/L	10/10/1998	0001	7.58 - 12.58	119.000		# -	-
	mg/L	09/25/1999	0001	7.58 - 12.58	94.500	L	# -	-
	mg/L	10/03/2000	0001	7.58 - 12.58	105.000	L	# 0.0239	-
	mg/L	10/03/2000	0002	7.58 - 12.58	104.000	L	# 0.0239	-
	mg/L	10/30/2001	0001	7.58 - 12.58	106.000	L	# 0.373	-
	mg/L	10/30/2001	0002	7.58 - 12.58	109.000	L	# 0.373	-
	mg/L	10/08/2002	0001	7.58 - 12.58	100.000	F	# 0.0802	-
	mg/L	10/28/2003	0001	7.58 - 12.58	91.000	F	# 0.231	-
	mg/L	11/09/2004	0001	7.58 - 12.58	98	F	# 4	-
Dissolved Oxygen	mg/L	11/18/1995	N001	7.58 - 12.58	2.8		# 0.6	-
Gross Alpha	pCi/L	11/09/2004	0001	7.58 - 12.58	1.31	U F	# 1.31	± 0.79

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0424 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Gross Beta	pCi/L	11/09/2004	0001	7.58 - 12.58	3.41	FJ #	2.52	± 1.66
Iron	mg/L	11/18/1995	0001	7.58 - 12.58	18.7	#	0.03	-
	mg/L	11/18/1995	0002	7.58 - 12.58	18.9	#	0.03	-
	mg/L	12/06/1996	0001	7.58 - 12.58	18.800	#	-	-
	mg/L	11/11/1997	0001	7.58 - 12.58	20.300	#	-	-
	mg/L	11/11/1997	0002	7.58 - 12.58	21.400	#	-	-
	mg/L	10/10/1998	0001	7.58 - 12.58	21.800	#	-	-
	mg/L	09/25/1999	0001	7.58 - 12.58	18.900	L #	-	-
	mg/L	10/03/2000	0001	7.58 - 12.58	17.700	L #	0.0116	-
	mg/L	10/03/2000	0002	7.58 - 12.58	18.100	L #	0.0116	-
Magnesium	mg/L	11/18/1995	0001	7.58 - 12.58	25.3	#	0.1	-
	mg/L	11/18/1995	0002	7.58 - 12.58	25.6	#	0.1	-
	mg/L	12/06/1996	0001	7.58 - 12.58	26.400	#	-	-
	mg/L	11/11/1997	0001	7.58 - 12.58	24.400	#	-	-
	mg/L	11/11/1997	0002	7.58 - 12.58	25.100	#	-	-
	mg/L	10/10/1998	0001	7.58 - 12.58	26.500	#	-	-
	mg/L	09/25/1999	0001	7.58 - 12.58	24.600	L #	-	-
	mg/L	10/03/2000	0001	7.58 - 12.58	24.100	L #	0.0352	-
	mg/L	10/03/2000	0002	7.58 - 12.58	23.500	L #	0.0352	-
	mg/L	10/30/2001	0001	7.58 - 12.58	24.300	L #	0.0041	-
	mg/L	10/30/2001	0002	7.58 - 12.58	24.000	L #	0.0041	-
	mg/L	10/08/2002	0001	7.58 - 12.58	25.500	F #	0.011	-
	mg/L	10/28/2003	0001	7.58 - 12.58	24.400	F #	0.005	-
	mg/L	11/09/2004	0001	7.58 - 12.58	25.000	F #	0.0042	-
Manganese	mg/L	11/18/1995	0001	7.58 - 12.58	6.39	#	0.01	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0424 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Manganese	mg/L	11/18/1995	0002	7.58 - 12.58	6.46		# 0.01	-
	mg/L	12/06/1996	0001	7.58 - 12.58	6.720		# -	-
	mg/L	11/11/1997	0001	7.58 - 12.58	6.120		# -	-
	mg/L	11/11/1997	0002	7.58 - 12.58	6.420		# -	-
	mg/L	10/10/1998	0001	7.58 - 12.58	6.540		# -	-
	mg/L	09/25/1999	0001	7.58 - 12.58	6.200	L	# -	-
	mg/L	10/03/2000	0001	7.58 - 12.58	5.810	L	# 0.002	-
	mg/L	10/03/2000	0002	7.58 - 12.58	5.620	L	# 0.002	-
	mg/L	10/30/2001	0001	7.58 - 12.58	6.120	L	# 0.0001	-
	mg/L	10/30/2001	0002	7.58 - 12.58	6.110	L	# 0.0001	-
	mg/L	10/08/2002	0001	7.58 - 12.58	5.560	F	# 0.0002	-
	mg/L	10/28/2003	0001	7.58 - 12.58	4.860	F	# 0.0001	-
	mg/L	11/09/2004	0001	7.58 - 12.58	5.400	F	# 6.6E-05	-
Molybdenum	mg/L	11/18/1995	0001	7.58 - 12.58	0.01	U	# 0.01	-
	mg/L	11/18/1995	0002	7.58 - 12.58	0.01	U	# 0.01	-
	mg/L	12/06/1996	0001	7.58 - 12.58	0.0010	U	# 0.001	-
	mg/L	11/11/1997	0001	7.58 - 12.58	0.0011	B	# -	-
	mg/L	11/11/1997	0002	7.58 - 12.58	0.0011	B	# -	-
	mg/L	10/10/1998	0001	7.58 - 12.58	0.0010	B	# -	-
	mg/L	09/25/1999	0001	7.58 - 12.58	0.0014	B L	# -	-
	mg/L	10/03/2000	0001	7.58 - 12.58	0.0018	B UL	# 0.0004	-
	mg/L	10/03/2000	0002	7.58 - 12.58	0.0011	B UL	# 0.0004	-
	mg/L	10/30/2001	0001	7.58 - 12.58	0.0019	U L	# 0.0019	-
	mg/L	10/30/2001	0002	7.58 - 12.58	0.0019	U L	# 0.0019	-
	mg/L	10/08/2002	0001	7.58 - 12.58	0.003	U F	# 0.003	-
	mg/L	10/28/2003	0001	7.58 - 12.58	0.00170	U F	# 0.0017	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0424 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Molybdenum	mg/L	11/09/2004	N001	7.58 - 12.58	0.00066	B UF #	0.00017	-
Nitrate as NO3	mg/L	11/18/1995	N001	7.58 - 12.58	1	U #	1	-
	mg/L	11/18/1995	N002	7.58 - 12.58	1	U #	1	-
	mg/L	12/06/1996	N001	7.58 - 12.58	0.0693	B #	-	-
ORP of Zobell Solution	mV	10/03/2000	N001	7.58 - 12.58	233	L #	-	-
	mV	10/30/2001	N001	7.58 - 12.58	240	L #	-	-
Oxidation Reduction Potent	mV	11/18/1995	N001	7.58 - 12.58	178	#	-	-
	mV	12/06/1996	N001	7.58 - 12.58	-94	#	-	-
	mV	11/11/1997	N001	7.58 - 12.58	-57	#	-	-
	mV	10/10/1998	N001	7.58 - 12.58	-79	#	-	-
	mV	09/25/1999	N001	7.58 - 12.58	-67	L #	-	-
	mV	10/03/2000	N001	7.58 - 12.58	2	L #	-	-
	mV	10/30/2001	N001	7.58 - 12.58	-110	L #	-	-
	mV	10/08/2002	N001	7.58 - 12.58	-0.1	F #	-	-
	mV	10/28/2003	N001	7.58 - 12.58	-32	F #	-	-
	mV	11/09/2004	N001	7.58 - 12.58	-37.3	F #	-	-
pH	s.u.	11/18/1995	N001	7.58 - 12.58	6.64	#	0.1	-
	s.u.	12/06/1996	N001	7.58 - 12.58	6.62	#	-	-
	s.u.	11/11/1997	N001	7.58 - 12.58	6.63	#	-	-
	s.u.	10/10/1998	N001	7.58 - 12.58	6.77	#	-	-
	s.u.	09/25/1999	N001	7.58 - 12.58	6.45	L #	-	-
	s.u.	10/03/2000	N001	7.58 - 12.58	6.43	L #	-	-
	s.u.	10/30/2001	N001	7.58 - 12.58	6.52	L #	-	-
	s.u.	10/08/2002	N001	7.58 - 12.58	6.89	F #	-	-
	s.u.	10/28/2003	N001	7.58 - 12.58	6.58	F #	-	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0424 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
pH	s.u.	11/09/2004	N001	7.58 - 12.58	6.57	F #	-	-
Potassium	mg/L	11/18/1995	0001	7.58 - 12.58	3.3	#	0.1	-
	mg/L	11/18/1995	0002	7.58 - 12.58	3.3	#	0.1	-
	mg/L	12/06/1996	0001	7.58 - 12.58	3.360	#	-	-
	mg/L	11/11/1997	0001	7.58 - 12.58	2.990	#	-	-
	mg/L	11/11/1997	0002	7.58 - 12.58	3.040	#	-	-
	mg/L	10/10/1998	0001	7.58 - 12.58	3.240	#	-	-
	mg/L	09/25/1999	0001	7.58 - 12.58	2.980	L #	-	-
	mg/L	10/03/2000	0001	7.58 - 12.58	3.030	L #	0.0327	-
	mg/L	10/03/2000	0002	7.58 - 12.58	2.960	L #	0.0327	-
	mg/L	10/30/2001	0001	7.58 - 12.58	2.970	E JL #	0.0151	-
	mg/L	10/30/2001	0002	7.58 - 12.58	2.960	E JL #	0.0151	-
	mg/L	10/08/2002	0001	7.58 - 12.58	3.010	F #	0.0259	-
	mg/L	10/28/2003	0001	7.58 - 12.58	2.670	F #	0.0091	-
	mg/L	11/09/2004	0001	7.58 - 12.58	4.900	F #	0.064	-
Selenium	mg/L	11/11/1997	0001	7.58 - 12.58	0.0010	U #	0.001	-
	mg/L	11/11/1997	0002	7.58 - 12.58	0.0010	U #	0.001	-
	mg/L	09/25/1999	0001	7.58 - 12.58	0.00016	B L #	-	-
Sodium	mg/L	11/18/1995	0001	7.58 - 12.58	151	#	1	-
	mg/L	11/18/1995	0002	7.58 - 12.58	153	#	1	-
	mg/L	12/06/1996	0001	7.58 - 12.58	157.000	#	-	-
	mg/L	11/11/1997	0001	7.58 - 12.58	154.000	#	-	-
	mg/L	11/11/1997	0002	7.58 - 12.58	151.000	#	-	-
	mg/L	10/10/1998	0001	7.58 - 12.58	151.000	#	-	-
	mg/L	09/25/1999	0001	7.58 - 12.58	141.000	L #	-	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0424 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Sodium	mg/L	10/03/2000	0001	7.58 - 12.58	140.000	L #	0.302	-
	mg/L	10/03/2000	0002	7.58 - 12.58	138.000	L #	0.302	-
	mg/L	10/30/2001	0001	7.58 - 12.58	123.000	L #	0.0074	-
	mg/L	10/30/2001	0002	7.58 - 12.58	125.000	L #	0.0074	-
	mg/L	10/08/2002	0001	7.58 - 12.58	138.000	F #	0.895	-
	mg/L	10/28/2003	0001	7.58 - 12.58	139.000	F #	0.0064	-
	mg/L	11/09/2004	0001	7.58 - 12.58	120.000	F #	0.023	-
Specific Conductance	umhos/cm	11/18/1995	N001	7.58 - 12.58	1167		# 1	-
	umhos/cm	12/06/1996	N001	7.58 - 12.58	1431		# -	-
	umhos/cm	11/11/1997	N001	7.58 - 12.58	1492		# -	-
	umhos/cm	10/10/1998	N001	7.58 - 12.58	1456		# -	-
	umhos/cm	09/25/1999	N001	7.58 - 12.58	1407	L #	-	-
	umhos/cm	10/03/2000	N001	7.58 - 12.58	1378	L #	-	-
	umhos/cm	10/30/2001	N001	7.58 - 12.58	1280	L #	-	-
	umhos/cm	10/08/2002	N001	7.58 - 12.58	1308	F #	-	-
	umhos/cm	10/28/2003	N001	7.58 - 12.58	1182	F #	-	-
	umhos/cm	11/09/2004	N001	7.58 - 12.58	1347	F #	-	-
Sulfate	mg/L	11/18/1995	0001	7.58 - 12.58	206		# 1	-
	mg/L	11/18/1995	0002	7.58 - 12.58	203		# 1	-
	mg/L	12/06/1996	0001	7.58 - 12.58	178.000		# -	-
	mg/L	11/11/1997	0001	7.58 - 12.58	179.000		# -	-
	mg/L	11/11/1997	0002	7.58 - 12.58	179.000		# -	-
	mg/L	10/10/1998	0001	7.58 - 12.58	165.000		# -	-
	mg/L	09/25/1999	0001	7.58 - 12.58	150.000	L #	-	-
	mg/L	10/03/2000	0001	7.58 - 12.58	166.000	L #	0.0589	-
	mg/L	10/03/2000	0002	7.58 - 12.58	165.000	L #	0.0589	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0424 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Sulfate	mg/L	10/30/2001	0001	7.58 - 12.58	162.000	L #	0.409	-
	mg/L	10/30/2001	0002	7.58 - 12.58	156.000	L #	0.409	-
	mg/L	10/08/2002	0001	7.58 - 12.58	171.000	F #	0.0786	-
	mg/L	10/28/2003	0001	7.58 - 12.58	154.000	F #	0.153	-
	mg/L	11/09/2004	0001	7.58 - 12.58	130	F #	10	-
Temperature	C	11/18/1995	N001	7.58 - 12.58	13.1	#	0.1	-
	C	12/06/1996	N001	7.58 - 12.58	12.5	#	-	-
	C	11/11/1997	N001	7.58 - 12.58	12.7	#	-	-
	C	10/10/1998	N001	7.58 - 12.58	13.9	#	-	-
	C	09/25/1999	N001	7.58 - 12.58	13.8	L #	-	-
	C	10/03/2000	N001	7.58 - 12.58	14.1	L #	-	-
	C	10/30/2001	N001	7.58 - 12.58	15.4	L #	-	-
	C	10/08/2002	N001	7.58 - 12.58	16.4	F #	-	-
	C	10/28/2003	N001	7.58 - 12.58	13.83	F #	-	-
	C	11/09/2004	N001	7.58 - 12.58	13.79	F #	-	-
Temperature of Zobell Solu	C	10/03/2000	N001	7.58 - 12.58	16.1	L #	-	-
	C	10/30/2001	N001	7.58 - 12.58	11.6	L #	-	-
Total Dissolved Solids	mg/L	11/18/1995	0001	7.58 - 12.58	910	#	10	-
	mg/L	11/18/1995	0002	7.58 - 12.58	910	#	10	-
	mg/L	12/06/1996	0001	7.58 - 12.58	380	#	-	-
	mg/L	11/11/1997	0001	7.58 - 12.58	850	#	-	-
	mg/L	11/11/1997	0002	7.58 - 12.58	860	#	-	-
	mg/L	10/10/1998	0001	7.58 - 12.58	817	#	-	-
	mg/L	09/25/1999	0001	7.58 - 12.58	1550	L #	-	-
	mg/L	10/03/2000	0001	7.58 - 12.58	778	L #	10	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0424 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Total Dissolved Solids	mg/L	10/03/2000	0002	7.58 - 12.58	788	L #	10	-
Turbidity	NTU	11/18/1995	N001	7.58 - 12.58	38	#	1	-
	NTU	12/06/1996	N001	7.58 - 12.58	3.08	#	-	-
	NTU	11/11/1997	N001	7.58 - 12.58	4.26	#	-	-
	NTU	10/10/1998	N001	7.58 - 12.58	123	#	-	-
	NTU	09/25/1999	N001	7.58 - 12.58	143	L #	-	-
	NTU	10/03/2000	N001	7.58 - 12.58	23.5	L #	-	-
	NTU	10/30/2001	N001	7.58 - 12.58	1.81	L #	-	-
	NTU	10/08/2002	N001	7.58 - 12.58	2.8	F #	-	-
	NTU	10/28/2003	N001	7.58 - 12.58	1.8	F #	-	-
	NTU	11/09/2004	N001	7.58 - 12.58	3.87	F #	-	-
Uranium	mg/L	11/18/1995	0001	7.58 - 12.58	0.001	U #	0.001	-
	mg/L	11/18/1995	0002	7.58 - 12.58	0.001	U #	0.001	-
	mg/L	12/06/1996	0001	7.58 - 12.58	0.0010	U #	0.001	-
	mg/L	11/11/1997	0001	7.58 - 12.58	0.0010	U #	0.001	-
	mg/L	11/11/1997	0002	7.58 - 12.58	0.0010	U #	0.001	-
	mg/L	10/10/1998	0001	7.58 - 12.58	0.0010	U #	0.001	-
	mg/L	09/25/1999	0001	7.58 - 12.58	0.00020	U L #	0.0002	-
	mg/L	10/03/2000	0001	7.58 - 12.58	0.00021	B UL #	0.0001	-
	mg/L	10/03/2000	0002	7.58 - 12.58	0.00021	B UL #	0.0001	-
	mg/L	10/30/2001	0001	7.58 - 12.58	0.00058	B UL #	0.0001	-
	mg/L	10/30/2001	0002	7.58 - 12.58	0.0006	B UL #	0.0001	-
	mg/L	10/08/2002	0001	7.58 - 12.58	0.0001	U F #	0.0001	-
	mg/L	10/28/2003	0001	7.58 - 12.58	0.00010	U F #	0.0001	-
	mg/L	11/09/2004	0001	7.58 - 12.58	0.00004	B UF #	8.3E-06	-

GROUND WATER QUALITY DATA BY LOCATION (USEE100) FOR SITE CAN01, Canonsburg Disposal Site

LOCATION: 0424 <well>

REPORT DATE: 9/13/2005 4:13 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	DEPTH RANGE (FT BLS)	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
-----------	-------	-----------------	----	-------------------------	--------	----------------------------	--------------------	------------------

RECORDS: SELECTED FROM USEE100 WHERE site_code='CAN01' AND location_code in('0406','0406A','0410','0412','0413','0414','0414A','0414B','0424') AND quality_assurance = TRUE AND (data_validation_qualifiers IS NULL OR data_validation_qualifiers NOT LIKE '%R%' AND data_validation_qualifiers NOT LIKE '%X%') AND DATE_SAMPLED between #1/1/1995# and #12/31/2005#

SAMPLE ID CODES: 000X = Filtered sample (0.45 µm). N00X = Unfiltered sample. X = replicate number.

LAB QUALIFIERS:

- * Replicate analysis not within control limits.
- + Correlation coefficient for MSA < 0.995.
- > Result above upper detection limit.
- A TIC is a suspected aldol-condensation product.
- B Inorganic: Result is between the IDL and CRDL. Organic: Analyte also found in method blank.
- C Pesticide result confirmed by GC-MS.
- D Analyte determined in diluted sample.
- E Inorganic: Estimate value because of interference, see case narrative. Organic: Analyte exceeded calibration range of the GC-MS.
- H Holding time expired, value suspect.
- I Increased detection limit due to required dilution.
- J Estimated
- M GFAA duplicate injection precision not met.
- N Inorganic or radiochemical: Spike sample recovery not within control limits. Organic: Tentatively identified compound (TIC).
- P > 25% difference in detected pesticide or Arochlor concentrations between 2 columns.
- S Result determined by method of standard addition (MSA).
- U Analytical result below detection limit.
- W Post-digestion spike outside control limits while sample absorbance < 50% of analytical spike absorbance.
- X Laboratory defined (USEPA CLP organic) qualifier, see case narrative.
- Y Laboratory defined (USEPA CLP organic) qualifier, see case narrative.
- Z Laboratory defined (USEPA CLP organic) qualifier, see case narrative.

DATA QUALIFIERS:

- | | | |
|--|--|--------------------|
| F Low flow sampling method used. | G Possible grout contamination, pH > 9. | J Estimated value. |
| L Less than 3 bore volumes purged prior to sampling. | Q Qualitative result due to sampling technique | R Unusable result. |
| U Parameter analyzed for but was not detected. | X Location is undefined. | |

QA QUALIFIER: # = validated according to Quality Assurance guidelines.

Appendix B

Surface Water Quality Data
By Locations

SURFACE WATER QUALITY DATA BY LOCATION (USEE102) FOR SITE CAN01, Canonsburg Disposal Site
LOCATION: 0601 RESERVED MGILBERT, WQD, 4/24/89
REPORT DATE: 9/13/2005 4:14 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Alkalinity, Total (As CaCO3	mg/L	12/03/1996	0001	125		# -	-
	mg/L	11/12/1997	N001	147		# -	-
	mg/L	10/11/1998	0001	151		# -	-
	mg/L	10/11/1998	N001	129		# -	-
	mg/L	09/25/1999	0001	141		# -	-
	mg/L	09/25/1999	N001	142		# -	-
	mg/L	10/03/2000	0001	139		# -	-
	mg/L	10/03/2000	N001	150		# -	-
	mg/L	10/08/2002	0001	142		# -	-
	mg/L	10/28/2003	0001	162		# -	-
	mg/L	11/09/2004	0001	158		# -	-
Arsenic	mg/L	12/03/1996	0001	0.00023	B	# -	-
	mg/L	11/12/1997	0001	0.0010	U	# 0.001	-
Calcium	mg/L	12/03/1996	0001	74.800		# -	-
	mg/L	11/12/1997	0001	79.700		# -	-
	mg/L	10/11/1998	0001	81.300		# -	-
	mg/L	09/25/1999	0001	118.000		# -	-
	mg/L	10/03/2000	0001	85.100		# 0.0481	-
	mg/L	10/30/2001	0001	115.000		# 0.0653	-
	mg/L	10/08/2002	0001	103.000		# 0.0446	-
	mg/L	10/28/2003	0001	69.000		# 0.056	-
	mg/L	11/09/2004	0001	84.000		# 0.0026	-
Chloride	mg/L	12/03/1996	0001	35.600		# -	-
	mg/L	11/12/1997	0001	46.600		# -	-
	mg/L	10/11/1998	0001	62.800		# -	-
	mg/L	09/25/1999	0001	82.300		# -	-
	mg/L	10/03/2000	0001	72.200		# 0.0239	-
	mg/L	10/30/2001	0001	134.000		# 0.373	-
	mg/L	10/08/2002	0001	124.000		# 0.2005	-
	mg/L	10/28/2003	0001	43.100		# 0.231	-
	mg/L	11/09/2004	0001	58		# 1	-
Gross Alpha	pCi/L	11/12/1997	0001	4.49	U	# 4.49	± 2.49
	pCi/L	10/11/1998	0001	10.15	U	# 10.15	± 5.54
	pCi/L	09/25/1999	0001	9.30	U	# 9.3	± 4.38
	pCi/L	10/03/2000	0001	9.28	U	# 9.28	± 4.79
Gross Beta	pCi/L	11/12/1997	0001	5.36		# 4.16	± 2.64
	pCi/L	10/11/1998	0001	11.56	U	# 11.56	± 7.09
	pCi/L	09/25/1999	0001	9.56	U	# 9.56	± 5.94

SURFACE WATER QUALITY DATA BY LOCATION (USEE102) FOR SITE CAN01, Canonsburg Disposal Site
LOCATION: 0601 RESERVED MGILBERT, WQD, 4/24/89
REPORT DATE: 9/13/2005 4:14 pm

PARAMETER	UNITS	SAMPLE:		RESULT	QUALIFIERS:			DETECTION LIMIT	UN- CERTAINTY
		DATE	ID		LAB	DATA	QA		
Gross Beta	pCi/L	10/03/2000	0001	11.78	U		#	11.78	± 6.86
Iron	mg/L	12/03/1996	0001	0.0209	B		#	-	-
	mg/L	11/12/1997	0001	0.0266	B		#	-	-
	mg/L	10/11/1998	0001	0.0364			#	-	-
	mg/L	09/25/1999	0001	0.0151	B	U	#	-	-
	mg/L	10/03/2000	0001	0.0196	B		#	0.0116	-
Magnesium	mg/L	12/03/1996	0001	15.100			#	-	-
	mg/L	11/12/1997	0001	17.500			#	-	-
	mg/L	10/11/1998	0001	17.400			#	-	-
	mg/L	09/25/1999	0001	32.200			#	-	-
	mg/L	10/03/2000	0001	21.800			#	0.0352	-
	mg/L	10/30/2001	0001	29.300			#	0.0041	-
	mg/L	10/08/2002	0001	28.800			#	0.011	-
	mg/L	10/28/2003	0001	14.000			#	0.005	-
	mg/L	11/09/2004	0001	19.000			#	0.0042	-
Manganese	mg/L	12/03/1996	0001	0.0837			#	-	-
	mg/L	11/12/1997	0001	0.109			#	-	-
	mg/L	10/11/1998	0001	0.0880			#	-	-
	mg/L	09/25/1999	0001	0.111			#	-	-
	mg/L	10/03/2000	0001	0.0673			#	0.002	-
	mg/L	10/30/2001	0001	0.0952			#	0.0001	-
	mg/L	10/08/2002	0001	0.0569			#	0.0002	-
	mg/L	10/28/2003	0001	0.0732			#	0.0001	-
	mg/L	11/09/2004	0001	0.066			#	6.6E-05	-
Molybdenum	mg/L	12/03/1996	0001	0.0398			#	-	-
	mg/L	11/12/1997	0001	0.0826			#	-	-
	mg/L	10/11/1998	0001	0.119			#	-	-
	mg/L	09/25/1999	0001	0.0961			#	-	-
	mg/L	10/03/2000	0001	0.0583			#	0.0004	-
	mg/L	10/30/2001	0001	0.0464			#	0.0019	-
	mg/L	10/08/2002	0001	0.0573			#	0.003	-
	mg/L	10/28/2003	0001	0.0242			#	0.0017	-
	mg/L	11/09/2004	0001	0.025			#	0.00017	-
Nitrate as NO3	mg/L	12/03/1996	0001	10.100			#	-	-
ORP of Zobell Solution	mV	10/03/2000	N001	228			#	-	-
	mV	10/30/2001	N001	237			#	-	-
Oxidation Reduction Potent	mV	12/03/1996	N001	157			#	-	-

SURFACE WATER QUALITY DATA BY LOCATION (USEE102) FOR SITE CAN01, Canonsburg Disposal Site
LOCATION: 0601 RESERVED MGILBERT, WQD, 4/24/89
REPORT DATE: 9/13/2005 4:14 pm

PARAMETER	UNITS	SAMPLE:		RESULT	QUALIFIERS:			DETECTION LIMIT	UN- CERTAINTY
		DATE	ID		LAB	DATA	QA		
Oxidation Reduction Potent	mV	11/12/1997	N001	186			#	-	-
	mV	10/11/1998	N001	167			#	-	-
	mV	09/25/1999	N001	61			#	-	-
	mV	10/03/2000	N001	176			#	-	-
	mV	10/30/2001	N001	49			#	-	-
	mV	10/08/2002	N001	65			#	-	-
	mV	10/28/2003	N001	137			#	-	-
	mV	11/09/2004	N001	94.7			#	-	-
pH	s.u.	12/03/1996	N001	7.75			#	-	-
	s.u.	11/12/1997	N001	7.78			#	-	-
	s.u.	10/11/1998	N001	7.80			#	-	-
	s.u.	09/25/1999	N001	7.72			#	-	-
	s.u.	10/03/2000	N001	8.24			#	-	-
	s.u.	10/30/2001	N001	8.54			#	-	-
	s.u.	10/08/2002	N001	8.29			#	-	-
	s.u.	10/28/2003	N001	6.51			#	-	-
	s.u.	11/09/2004	N001	7.66			#	-	-
Potassium	mg/L	12/03/1996	0001	3.390			#	-	-
	mg/L	11/12/1997	0001	5.510			#	-	-
	mg/L	10/11/1998	0001	7.140			#	-	-
	mg/L	09/25/1999	0001	8.530			#	-	-
	mg/L	10/03/2000	0001	6.840			#	0.0327	-
	mg/L	10/30/2001	0001	8.550	E	J	#	0.0151	-
	mg/L	10/08/2002	0001	8.110			#	0.0259	-
	mg/L	10/28/2003	0001	3.750			#	0.0091	-
	mg/L	11/09/2004	0001	5.600			#	0.064	-
Selenium	mg/L	11/12/1997	0001	0.0010	U		#	0.001	-
	mg/L	10/11/1998	0001	0.0010	U		#	0.001	-
	mg/L	09/25/1999	0001	0.00043	B		#	-	-
	mg/L	10/03/2000	0001	0.00031	B		#	0.0001	-
Sodium	mg/L	12/03/1996	0001	37.100			#	-	-
	mg/L	11/12/1997	0001	52.700			#	-	-
	mg/L	10/11/1998	0001	68.000			#	-	-
	mg/L	09/25/1999	0001	170.000			#	-	-
	mg/L	10/03/2000	0001	104.000			#	0.302	-
	mg/L	10/30/2001	0001	173.000			#	0.0074	-
	mg/L	10/08/2002	0001	180.000			#	0.895	-
	mg/L	10/28/2003	0001	37.100			#	0.0064	-

SURFACE WATER QUALITY DATA BY LOCATION (USEE102) FOR SITE CAN01, Canonsburg Disposal Site
LOCATION: 0601 RESERVED MGILBERT, WQD, 4/24/89
REPORT DATE: 9/13/2005 4:14 pm

PARAMETER	UNITS	SAMPLE:		RESULT	QUALIFIERS:	DETECTION	UN-
		DATE	ID		LAB DATA QA	LIMIT	CERTAINTY
Sodium	mg/L	11/09/2004	0001	37.000		# 0.0046	-
Specific Conductance	umhos/c	12/03/1996	N001	656		# -	-
	umhos/c	11/12/1997	N001	808		# -	-
	umhos/c	10/11/1998	N001	842		# -	-
	umhos/c	09/25/1999	N001	1571		# -	-
	umhos/c	10/03/2000	N001	1103		# -	-
	umhos/c	10/30/2001	N001	1865		# -	-
	umhos/c	10/08/2002	N001	1357		# -	-
	umhos/c	10/28/2003	N001	574		# -	-
	umhos/c	11/09/2004	N001	742		# -	-
Sulfate	mg/L	12/03/1996	0001	111.000		# -	-
	mg/L	11/12/1997	0001	161.000		# -	-
	mg/L	10/11/1998	0001	146.000		# -	-
	mg/L	09/25/1999	0001	460.000		# -	-
	mg/L	10/03/2000	0001	238.000		# 0.0589	-
	mg/L	10/30/2001	0001	494.000		# 0.409	-
	mg/L	10/08/2002	0001	454.000		# 0.1965	-
	mg/L	10/28/2003	0001	90.200		# 0.153	-
	mg/L	11/09/2004	0001	92		# 2.5	-
Temperature	C	12/03/1996	N001	5.5		# -	-
	C	11/12/1997	N001	6.8		# -	-
	C	10/11/1998	N001	13.1		# -	-
	C	09/25/1999	N001	15.2		# -	-
	C	10/03/2000	N001	19.7		# -	-
	C	10/30/2001	N001	5.4		# -	-
	C	10/08/2002	N001	15.5		# -	-
	C	10/28/2003	N001	8.79		# -	-
	C	11/09/2004	N001	8.47		# -	-
Temperature of Zobell Solu	C	10/03/2000	N001	19		# -	-
	C	10/30/2001	N001	8.5		# -	-
Total Dissolved Solids	mg/L	12/03/1996	0001	410		# -	-
	mg/L	11/12/1997	0001	517		# -	-
	mg/L	10/11/1998	0001	545		# -	-
	mg/L	09/25/1999	0001	1040		# -	-
	mg/L	10/03/2000	0001	670		# 10	-
Turbidity	NTU	11/12/1997	N001	12.0		# -	-
	NTU	10/11/1998	N001	16.7		# -	-

SURFACE WATER QUALITY DATA BY LOCATION (USEE102) FOR SITE CAN01, Canonsburg Disposal Site
LOCATION: 0601 RESERVED MGILBERT, WQD, 4/24/89
REPORT DATE: 9/13/2005 4:14 pm

PARAMETER	UNITS	SAMPLE:		RESULT	QUALIFIERS:		DETECTION LIMIT	UN- CERTAINTY
		DATE	ID		LAB	DATA QA		
Turbidity	NTU	10/03/2000	N001	7.73		#	-	-
	NTU	10/28/2003	N001	21.9		#	-	-
Uranium	mg/L	12/03/1996	0001	0.0010	U	#	0.001	-
	mg/L	11/12/1997	0001	0.0010	U	#	0.001	-
	mg/L	10/11/1998	0001	0.0010	U	#	0.001	-
	mg/L	09/25/1999	0001	0.00020	U	#	0.0002	-
	mg/L	10/03/2000	0001	0.00056	B	U	0.0001	-
	mg/L	10/30/2001	0001	0.00094	B	U	0.0001	-
	mg/L	10/08/2002	0001	0.00046	B	#	0.0001	-
	mg/L	10/28/2003	0001	0.00049	B	#	0.0001	-
	mg/L	11/09/2004	0001	0.00024		U	8.3E-06	-

RECORDS: SELECTED FROM USEE102 WHERE site_code='CAN01' AND location_code in('0601','0602','0603') AND quality_assurance = TRUE
AND (data_validation_qualifiers IS NULL OR data_validation_qualifiers NOT LIKE '%R%' AND data_validation_qualifiers NOT LIKE
'%X%') AND DATE_SAMPLED between #1/1/1995# and #12/31/2005#

SAMPLE ID CODES: 000X = Filtered sample (0.45 µm). N00X = Unfiltered sample. X = replicate number.

LAB QUALIFIERS:

- * Replicate analysis not within control limits.
- + Correlation coefficient for MSA < 0.995.
- > Result above upper detection limit.
- A TIC is a suspected aldol-condensation product.
- B Inorganic: Result is between the IDL and CRDL. Organic: Analyte also found in method blank.
- C Pesticide result confirmed by GC-MS.
- D Analyte determined in diluted sample.
- E Inorganic: Estimate value because of interference, see case narrative. Organic: Analyte exceeded calibration range of the GC-MS.
- H Holding time expired, value suspect.
- I Increased detection limit due to required dilution.
- J Estimated
- M GFAA duplicate injection precision not met.
- N Inorganic or radiochemical: Spike sample recovery not within control limits. Organic: Tentatively identified compound (TIC).
- P > 25% difference in detected pesticide or Arochlor concentrations between 2 columns.
- S Result determined by method of standard addition (MSA).
- U Analytical result below detection limit.
- W Post-digestion spike outside control limits while sample absorbance < 50% of analytical spike absorbance.
- X Laboratory defined (USEPA CLP organic) qualifier, see case narrative.
- Y Laboratory defined (USEPA CLP organic) qualifier, see case narrative.
- Z Laboratory defined (USEPA CLP organic) qualifier, see case narrative.

DATA QUALIFIERS:

- F Low flow sampling method used.
- J Estimated value.
- Q Qualitative result due to sampling technique
- U Parameter analyzed for but was not detected.
- G Possible grout contamination, pH > 9.
- L Less than 3 bore volumes purged prior to sampling.
- R Unusable result.
- X Location is undefined.

QA QUALIFIER: # = validated according to Quality Assurance guidelines.

SURFACE WATER QUALITY DATA BY LOCATION (USEE102) FOR SITE CAN01, Canonsburg Disposal Site
LOCATION: 0602 RESERVED MGILBERT, WQD, 4/24/89
REPORT DATE: 9/13/2005 4:14 pm

PARAMETER	UNITS	SAMPLE:		RESULT	QUALIFIERS:			DETECTION LIMIT	UN- CERTAINTY
		DATE	ID		LAB	DATA	QA		
Alkalinity, Total (As CaCO ₃)	mg/L	12/04/1996	0001	131			#	-	-
	mg/L	11/12/1997	N001	146			#	-	-
	mg/L	10/11/1998	0001	166			#	-	-
	mg/L	10/11/1998	N001	141			#	-	-
	mg/L	09/25/1999	0001	142			#	-	-
	mg/L	09/25/1999	N001	138			#	-	-
	mg/L	10/03/2000	0001	143			#	-	-
	mg/L	10/03/2000	N001	130			#	-	-
	mg/L	10/08/2002	0001	142			#	-	-
	mg/L	10/28/2003	0001	148			#	-	-
	mg/L	11/09/2004	0001	194			#	-	-
Arsenic	mg/L	12/04/1996	0001	0.00043	B		#	-	-
	mg/L	11/12/1997	0001	0.0010	U		#	0.001	-
	mg/L	10/03/2000	0002	0.00079	B		#	0.0002	-
Calcium	mg/L	12/04/1996	0001	78.300			#	-	-
	mg/L	11/12/1997	0001	79.900			#	-	-
	mg/L	10/11/1998	0001	82.500			#	-	-
	mg/L	09/25/1999	0001	117.000			#	-	-
	mg/L	09/25/1999	0002	116.000			#	-	-
	mg/L	10/03/2000	0001	83.600			#	0.0481	-
	mg/L	10/03/2000	0002	83.100			#	0.0481	-
	mg/L	10/30/2001	0001	121.000			#	0.0653	-
	mg/L	10/08/2002	0001	103.000			#	0.0446	-
	mg/L	10/28/2003	0001	68.700			#	0.056	-
	mg/L	10/28/2003	0002	68.400			#	0.056	-
	mg/L	11/09/2004	0001	86.000			#	0.0026	-
Chloride	mg/L	12/04/1996	0001	39.500			#	-	-
	mg/L	11/12/1997	0001	47.100			#	-	-
	mg/L	10/11/1998	0001	61.800			#	-	-
	mg/L	09/25/1999	0001	84.100			#	-	-
	mg/L	09/25/1999	0002	81.400			#	-	-
	mg/L	10/03/2000	0001	79.800			#	0.0239	-
	mg/L	10/03/2000	0002	80.000			#	0.0239	-
	mg/L	10/30/2001	0001	133.000			#	0.373	-
	mg/L	10/08/2002	0001	121.000			#	0.401	-
	mg/L	10/28/2003	0001	42.300			#	0.231	-
	mg/L	10/28/2003	0002	42.400			#	0.231	-
	mg/L	11/09/2004	0001	56			#	2	-

SURFACE WATER QUALITY DATA BY LOCATION (USEE102) FOR SITE CAN01, Canonsburg Disposal Site
LOCATION: 0602 RESERVED MGILBERT, WQD, 4/24/89
REPORT DATE: 9/13/2005 4:14 pm

PARAMETER	UNITS	SAMPLE:		RESULT	QUALIFIERS:			DETECTION LIMIT	UN- CERTAINTY
		DATE	ID		LAB	DATA	QA		
Gross Alpha	pCi/L	11/12/1997	0001	4.50	U		#	4.5	± 2.53
	pCi/L	10/11/1998	0001	10.19	U		#	10.19	± 5.23
	pCi/L	09/25/1999	0001	9.42	U		#	9.42	± 4.20
	pCi/L	09/25/1999	0002	9.22	U		#	9.22	± 4.34
	pCi/L	10/03/2000	0001	9.21	U		#	9.21	± 5.03
	pCi/L	10/03/2000	0002	9.19	U		#	9.19	± 4.51
Gross Beta	pCi/L	11/12/1997	0001	4.93			#	4.16	± 2.62
	pCi/L	10/11/1998	0001	11.57	U		#	11.57	± 6.64
	pCi/L	09/25/1999	0001	9.54	U		#	9.54	± 5.86
	pCi/L	09/25/1999	0002	9.56	U		#	9.56	± 5.74
	pCi/L	10/03/2000	0001	11.78	U		#	11.78	± 7.02
	pCi/L	10/03/2000	0002	11.76	U		#	11.76	± 7.00
Iron	mg/L	12/04/1996	0001	0.0130	B		#	-	-
	mg/L	11/12/1997	0001	0.0358			#	-	-
	mg/L	10/11/1998	0001	0.0367			#	-	-
	mg/L	09/25/1999	0001	0.0221	B		#	-	-
	mg/L	09/25/1999	0002	0.0261	B		#	-	-
	mg/L	10/03/2000	0001	0.036			#	0.0116	-
	mg/L	10/03/2000	0002	0.0263	B		#	0.0116	-
Magnesium	mg/L	12/04/1996	0001	16.100			#	-	-
	mg/L	11/12/1997	0001	17.700			#	-	-
	mg/L	10/11/1998	0001	17.600			#	-	-
	mg/L	09/25/1999	0001	31.700			#	-	-
	mg/L	09/25/1999	0002	31.800			#	-	-
	mg/L	10/03/2000	0001	20.900			#	0.0352	-
	mg/L	10/03/2000	0002	20.800			#	0.0352	-
	mg/L	10/30/2001	0001	30.400			#	0.0041	-
	mg/L	10/08/2002	0001	28.600			#	0.011	-
	mg/L	10/28/2003	0001	14.000			#	0.005	-
	mg/L	10/28/2003	0002	14.200			#	0.005	-
	mg/L	11/09/2004	0001	19.000			#	0.0042	-
Manganese	mg/L	12/04/1996	0001	0.0853			#	-	-
	mg/L	11/12/1997	0001	0.102			#	-	-
	mg/L	10/11/1998	0001	0.0803			#	-	-
	mg/L	09/25/1999	0001	0.0991			#	-	-
	mg/L	09/25/1999	0002	0.0994			#	-	-
	mg/L	10/03/2000	0001	0.0736			#	0.002	-
	mg/L	10/03/2000	0002	0.0707			#	0.002	-

SURFACE WATER QUALITY DATA BY LOCATION (USEE102) FOR SITE CAN01, Canonsburg Disposal Site
LOCATION: 0602 RESERVED MGILBERT, WQD, 4/24/89
REPORT DATE: 9/13/2005 4:14 pm

PARAMETER	UNITS	SAMPLE:		RESULT	QUALIFIERS:			DETECTION LIMIT	UN- CERTAINTY
		DATE	ID		LAB	DATA	QA		
Manganese	mg/L	10/30/2001	0001	0.0038	B		#	0.0001	-
	mg/L	10/08/2002	0001	0.0471			#	0.0002	-
	mg/L	10/28/2003	0001	0.0647			#	0.0001	-
	mg/L	10/28/2003	0002	0.0644			#	0.0001	-
	mg/L	11/09/2004	0001	0.071			#	6.6E-05	-
Molybdenum	mg/L	12/04/1996	0001	0.0499			#	-	-
	mg/L	11/12/1997	0001	0.0838			#	-	-
	mg/L	10/11/1998	0001	0.112			#	-	-
	mg/L	09/25/1999	0001	0.0959			#	-	-
	mg/L	09/25/1999	0002	0.0987			#	-	-
	mg/L	10/03/2000	0001	0.0953			#	0.0004	-
	mg/L	10/03/2000	0002	0.101			#	0.0004	-
	mg/L	10/30/2001	0001	0.0398			#	0.0019	-
	mg/L	10/08/2002	0001	0.0595			#	0.003	-
	mg/L	10/28/2003	0001	0.0214			#	0.0017	-
	mg/L	10/28/2003	0002	0.0263			#	0.0017	-
	mg/L	11/09/2004	0001	0.030			#	0.00017	-
Nitrate as NO3	mg/L	12/04/1996	0001	12.600			#	-	-
ORP of Zobell Solution	mV	10/03/2000	N001	233			#	-	-
	mV	10/30/2001	N001	240			#	-	-
Oxidation Reduction Potent	mV	12/04/1996	N001	143			#	-	-
	mV	11/12/1997	N001	186			#	-	-
	mV	10/11/1998	N001	150			#	-	-
	mV	09/25/1999	N001	102			#	-	-
	mV	10/03/2000	N001	190			#	-	-
	mV	10/30/2001	N001	130			#	-	-
	mV	10/08/2002	N001	-77			#	-	-
	mV	10/28/2003	N001	75			#	-	-
	mV	11/09/2004	N001	132.8			#	-	-
pH	s.u.	12/04/1996	N001	7.58			#	-	-
	s.u.	11/12/1997	N001	7.67			#	-	-
	s.u.	10/11/1998	N001	7.8			#	-	-
	s.u.	09/25/1999	N001	7.87			#	-	-
	s.u.	10/03/2000	N001	7.97			#	-	-
	s.u.	10/30/2001	N001	7.92			#	-	-
	s.u.	10/08/2002	N001	7.25			#	-	-
	s.u.	10/28/2003	N001	7.64			#	-	-
	s.u.	11/09/2004	N001	7.68			#	-	-

SURFACE WATER QUALITY DATA BY LOCATION (USEE102) FOR SITE CAN01, Canonsburg Disposal Site
LOCATION: 0602 RESERVED MGILBERT, WQD, 4/24/89
REPORT DATE: 9/13/2005 4:14 pm

PARAMETER	UNITS	SAMPLE:		RESULT	QUALIFIERS:		DETECTION LIMIT	UN- CERTAINTY
		DATE	ID		LAB	DATA QA		
Potassium	mg/L	12/04/1996	0001	4.100			#	-
	mg/L	11/12/1997	0001	5.500			#	-
	mg/L	10/11/1998	0001	7.000			#	-
	mg/L	09/25/1999	0001	8.790			#	-
	mg/L	09/25/1999	0002	8.650			#	-
	mg/L	10/03/2000	0001	6.830			#	0.0327
	mg/L	10/03/2000	0002	6.770			#	0.0327
	mg/L	10/30/2001	0001	8.280	E	J	#	0.0151
	mg/L	10/08/2002	0001	8.080			#	0.0259
	mg/L	10/28/2003	0001	3.660			#	0.0091
	mg/L	10/28/2003	0002	3.720			#	0.0091
	mg/L	11/09/2004	0001	5.400			#	0.064
Selenium	mg/L	11/12/1997	0001	0.0010	U		#	0.001
	mg/L	10/11/1998	0001	0.0010	U		#	0.001
	mg/L	09/25/1999	0001	0.00051	B		#	-
	mg/L	09/25/1999	0002	0.00041	B		#	-
	mg/L	10/03/2000	0001	0.0004	B		#	0.0001
Sodium	mg/L	12/04/1996	0001	41.800			#	-
	mg/L	11/12/1997	0001	53.700			#	-
	mg/L	10/11/1998	0001	69.700			#	-
	mg/L	09/25/1999	0001	168.000			#	-
	mg/L	09/25/1999	0002	168.000			#	-
	mg/L	10/03/2000	0001	93.000			#	0.302
	mg/L	10/03/2000	0002	92.200			#	0.302
	mg/L	10/30/2001	0001	182.000			#	0.0074
	mg/L	10/08/2002	0001	179.000			#	0.895
	mg/L	10/28/2003	0001	36.900			#	0.0064
	mg/L	10/28/2003	0002	37.600			#	0.0064
	mg/L	11/09/2004	0001	35.000			#	0.0046
Specific Conductance	umhos/c	12/04/1996	N001	704			#	-
	umhos/c	11/12/1997	N001	836			#	-
	umhos/c	10/11/1998	N001	868			#	-
	umhos/c	09/25/1999	N001	1548			#	-
	umhos/c	10/03/2000	N001	1031			#	-
	umhos/c	10/30/2001	N001	1650			#	-
	umhos/c	10/08/2002	N001	1499			#	-
	umhos/c	10/28/2003	N001	599			#	-
	umhos/c	11/09/2004	N001	736			#	-

SURFACE WATER QUALITY DATA BY LOCATION (USEE102) FOR SITE CAN01, Canonsburg Disposal Site
LOCATION: 0602 RESERVED MGILBERT, WQD, 4/24/89
REPORT DATE: 9/13/2005 4:14 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Sulfate	mg/L	12/04/1996	0001	121.000		#	-
	mg/L	11/12/1997	0001	165.000		#	-
	mg/L	10/11/1998	0001	149.000		#	-
	mg/L	09/25/1999	0001	456.000		#	-
	mg/L	09/25/1999	0002	438.000		#	-
	mg/L	10/03/2000	0001	234.000		#	0.0589
	mg/L	10/03/2000	0002	235.000		#	0.0589
	mg/L	10/30/2001	0001	514.000		#	0.409
	mg/L	10/08/2002	0001	453.000		#	0.393
	mg/L	10/28/2003	0001	90.300		#	0.153
	mg/L	10/28/2003	0002	87.900		#	0.153
	mg/L	11/09/2004	0001	92		#	5
Temperature	C	12/04/1996	N001	5.7		#	-
	C	11/12/1997	N001	6.8		#	-
	C	10/11/1998	N001	12.7		#	-
	C	09/25/1999	N001	16.2		#	-
	C	10/03/2000	N001	19		#	-
	C	10/30/2001	N001	9.6		#	-
	C	10/08/2002	N001	15.6		#	-
	C	10/28/2003	N001	9.63		#	-
	C	11/09/2004	N001	6.65		#	-
Temperature of Zobell Solu	C	10/03/2000	N001	16.1		#	-
	C	10/30/2001	N001	11.6		#	-
Total Dissolved Solids	mg/L	12/04/1996	0001	435		#	-
	mg/L	11/12/1997	0001	520		#	-
	mg/L	10/11/1998	0001	540		#	-
	mg/L	09/25/1999	0001	1040		#	-
	mg/L	09/25/1999	0002	1040		#	-
	mg/L	10/03/2000	0001	648		#	10
	mg/L	10/03/2000	0002	650		#	10
Turbidity	NTU	11/12/1997	N001	9.28		#	-
	NTU	10/11/1998	N001	14.8		#	-
	NTU	10/03/2000	N001	5.4		#	-
	NTU	10/28/2003	N001	20.7		#	-
	NTU	11/09/2004	N001	3.56		#	-
Uranium	mg/L	12/04/1996	0001	0.0010	U	#	0.001
	mg/L	11/12/1997	0001	0.0010	U	#	0.001
	mg/L	10/11/1998	0001	0.0010	U	#	0.001

SURFACE WATER QUALITY DATA BY LOCATION (USEE102) FOR SITE CAN01, Canonsburg Disposal Site
LOCATION: 0602 RESERVED MGILBERT, WQD, 4/24/89
REPORT DATE: 9/13/2005 4:14 pm

PARAMETER	UNITS	SAMPLE:		RESULT	QUALIFIERS:			DETECTION LIMIT	UN- CERTAINTY
		DATE	ID		LAB	DATA	QA		
Uranium	mg/L	09/25/1999	0001	0.00020	U		#	0.0002	-
	mg/L	09/25/1999	0002	0.00020	U		#	0.0002	-
	mg/L	10/03/2000	0001	0.00067	B	U	#	0.0001	-
	mg/L	10/03/2000	0002	0.00063	B	U	#	0.0001	-
	mg/L	10/30/2001	0001	0.001		U	#	0.0001	-
	mg/L	10/08/2002	0001	0.00051	B		#	0.0001	-
	mg/L	10/28/2003	0001	0.00066	B		#	0.0001	-
	mg/L	10/28/2003	0002	0.00064	B		#	0.0001	-
	mg/L	11/09/2004	0001	0.00031			#	8.3E-06	-

RECORDS: SELECTED FROM USEE102 WHERE site_code='CAN01' AND location_code in('0601','0602','0603') AND quality_assurance = TRUE
AND (data_validation_qualifiers IS NULL OR data_validation_qualifiers NOT LIKE '%R%' AND data_validation_qualifiers NOT LIKE '%X%') AND DATE_SAMPLED between #1/1/1995# and #12/31/2005#

SAMPLE ID CODES: 000X = Filtered sample (0.45 µm). N00X = Unfiltered sample. X = replicate number.

LAB QUALIFIERS:

- * Replicate analysis not within control limits.
- + Correlation coefficient for MSA < 0.995.
- > Result above upper detection limit.
- A TIC is a suspected aldol-condensation product.
- B Inorganic: Result is between the IDL and CRDL. Organic: Analyte also found in method blank.
- C Pesticide result confirmed by GC-MS.
- D Analyte determined in diluted sample.
- E Inorganic: Estimate value because of interference, see case narrative. Organic: Analyte exceeded calibration range of the GC-MS.
- H Holding time expired, value suspect.
- I Increased detection limit due to required dilution.
- J Estimated
- M GFAA duplicate injection precision not met.
- N Inorganic or radiochemical: Spike sample recovery not within control limits. Organic: Tentatively identified compound (TIC).
- P > 25% difference in detected pesticide or Arochlor concentrations between 2 columns.
- S Result determined by method of standard addition (MSA).
- U Analytical result below detection limit.
- W Post-digestion spike outside control limits while sample absorbance < 50% of analytical spike absorbance.
- X Laboratory defined (USEPA CLP organic) qualifier, see case narrative.
- Y Laboratory defined (USEPA CLP organic) qualifier, see case narrative.
- Z Laboratory defined (USEPA CLP organic) qualifier, see case narrative.

DATA QUALIFIERS:

- F Low flow sampling method used.
- J Estimated value.
- Q Qualitative result due to sampling technique
- U Parameter analyzed for but was not detected.
- G Possible grout contamination, pH > 9.
- L Less than 3 bore volumes purged prior to sampling.
- R Unusable result.
- X Location is undefined.

QA QUALIFIER: # = validated according to Quality Assurance guidelines.

SURFACE WATER QUALITY DATA BY LOCATION (USEE102) FOR SITE CAN01, Canonsburg Disposal Site
LOCATION: 0603 WS CHARTIERS CREEK UDR CONRAIL OVPS
REPORT DATE: 9/13/2005 4:14 pm

PARAMETER	UNITS	SAMPLE:		RESULT	QUALIFIERS:		DETECTION	UN-
		DATE	ID		LAB	DATA	LIMIT	CERTAINTY
Alkalinity, Total (As CaCO3	mg/L	11/19/1995	N001	130			# 10	-
	mg/L	12/04/1996	0001	93			#	-
	mg/L	11/11/1997	N001	157			#	-
	mg/L	10/11/1998	0001	144			#	-
	mg/L	10/11/1998	N001	142			#	-
	mg/L	09/25/1999	0001	142			#	-
	mg/L	09/25/1999	N001	142			#	-
	mg/L	10/03/2000	0001	217			#	-
	mg/L	10/03/2000	N001	138			#	-
	mg/L	10/08/2002	0001	120			#	-
	mg/L	10/28/2003	0001	157			#	-
	mg/L	11/09/2004	0001	163			#	-
Arsenic	mg/L	11/19/1995	0001	0.005	U		# 0.005	-
	mg/L	11/19/1995	N001	0.005	U		# 0.005	-
	mg/L	12/04/1996	0001	0.00046	B		#	-
	mg/L	12/04/1996	0002	0.00037	B		#	-
	mg/L	11/11/1997	0001	0.0010	U		# 0.001	-
	mg/L	11/11/1997	0002	0.0010	U		# 0.001	-
Calcium	mg/L	11/19/1995	0001	80.3			# 0.5	-
	mg/L	11/19/1995	N001	84.9			# 0.5	-
	mg/L	12/04/1996	0001	78.700			#	-
	mg/L	12/04/1996	0002	78.300			#	-
	mg/L	11/11/1997	0001	78.300			#	-
	mg/L	11/11/1997	0002	78.800			#	-
	mg/L	10/11/1998	0001	82.600			#	-
	mg/L	10/11/1998	0002	82.800			#	-
	mg/L	09/25/1999	0001	112.000			#	-
	mg/L	10/03/2000	0001	87.800			# 0.0481	-
	mg/L	10/30/2001	0001	118.000			# 0.0653	-
	mg/L	10/30/2001	0002	121.000			# 0.0653	-
	mg/L	10/08/2002	0001	94.600			# 0.0446	-
	mg/L	10/28/2003	0001	67.800			# 0.056	-
	mg/L	11/09/2004	0001	86.000			# 0.0026	-
Chloride	mg/L	11/19/1995	0001	115			# 0.5	-
	mg/L	12/04/1996	0001	39.000			#	-
	mg/L	12/04/1996	0002	39.200			#	-
	mg/L	11/11/1997	0001	43.600			#	-
	mg/L	11/11/1997	0002	43.500			#	-

SURFACE WATER QUALITY DATA BY LOCATION (USEE102) FOR SITE CAN01, Canonsburg Disposal Site
LOCATION: 0603 WS CHARTIERS CREEK UDR CONRAIL OVPS
REPORT DATE: 9/13/2005 4:14 pm

PARAMETER	UNITS	SAMPLE:		RESULT	QUALIFIERS:			DETECTION LIMIT	UN- CERTAINTY
		DATE	ID		LAB	DATA	QA		
Chloride	mg/L	10/11/1998	0001	62.900			#	-	-
	mg/L	10/11/1998	0002	62.700			#	-	-
	mg/L	09/25/1999	0001	83.700			#	-	-
	mg/L	10/03/2000	0001	80.500			#	0.0239	-
	mg/L	10/30/2001	0001	133.000			#	0.373	-
	mg/L	10/30/2001	0002	133.000			#	0.373	-
	mg/L	10/08/2002	0001	98.700			#	0.2005	-
	mg/L	10/28/2003	0001	44.600			#	0.231	-
	mg/L	11/09/2004	0001	57			#	2	-
Gross Alpha	pCi/L	11/11/1997	0001	4.05	U		#	4.05	± 2.16
	pCi/L	11/11/1997	0002	4.36	U		#	4.36	± 2.42
	pCi/L	10/11/1998	0001	10.51	U		#	10.51	± 4.91
	pCi/L	10/11/1998	0002	10.32	U		#	10.32	± 5.72
	pCi/L	09/25/1999	0001	8.94	U		#	8.94	± 4.53
	pCi/L	10/03/2000	0001	9.09	U		#	9.09	± 4.47
Gross Beta	pCi/L	11/11/1997	0001	4.62			#	3.74	± 2.36
	pCi/L	11/11/1997	0002	5.89			#	4.02	± 2.58
	pCi/L	10/11/1998	0001	11.57	U		#	11.57	± 7.01
	pCi/L	10/11/1998	0002	11.59	U		#	11.59	± 6.75
	pCi/L	09/25/1999	0001	9.57	U		#	9.57	± 5.47
	pCi/L	10/03/2000	0001	11.75	U		#	11.75	± 6.91
Iron	mg/L	11/19/1995	0001	0.03	U		#	0.03	-
	mg/L	11/19/1995	N001	0.49			#	0.03	-
	mg/L	12/04/1996	0001	0.0370		U	#	-	-
	mg/L	12/04/1996	0002	0.0176	B		#	-	-
	mg/L	11/11/1997	0001	0.0185	B		#	-	-
	mg/L	11/11/1997	0002	0.0190	B		#	-	-
	mg/L	10/11/1998	0001	0.0354			#	-	-
	mg/L	10/11/1998	0002	0.0390			#	-	-
	mg/L	09/25/1999	0001	0.0194	B		#	-	-
	mg/L	10/03/2000	0001	0.0143	B		#	0.0116	-
Magnesium	mg/L	11/19/1995	0001	15.9			#	0.1	-
	mg/L	11/19/1995	N001	16.6			#	0.1	-
	mg/L	12/04/1996	0001	16.200			#	-	-
	mg/L	12/04/1996	0002	16.100			#	-	-
	mg/L	11/11/1997	0001	17.100			#	-	-
	mg/L	11/11/1997	0002	17.200			#	-	-
	mg/L	10/11/1998	0001	17.800			#	-	-

SURFACE WATER QUALITY DATA BY LOCATION (USEE102) FOR SITE CAN01, Canonsburg Disposal Site
LOCATION: 0603 WS CHARTIERS CREEK UDR CONRAIL OVPS
REPORT DATE: 9/13/2005 4:14 pm

PARAMETER	UNITS	SAMPLE: DATE	ID	RESULT	QUALIFIERS: LAB DATA QA	DETECTION LIMIT	UN- CERTAINTY
Magnesium	mg/L	10/11/1998	0002	17.700	#	-	-
	mg/L	09/25/1999	0001	30.600	#	-	-
	mg/L	10/03/2000	0001	21.700	#	0.0352	-
	mg/L	10/30/2001	0001	30.100	#	0.0041	-
	mg/L	10/30/2001	0002	30.800	#	0.0041	-
	mg/L	10/08/2002	0001	25.000	#	0.011	-
	mg/L	10/28/2003	0001	13.700	#	0.005	-
	mg/L	11/09/2004	0001	19.000	#	0.0042	-
Manganese	mg/L	11/19/1995	0001	0.12	#	0.01	-
	mg/L	11/19/1995	N001	0.13	#	0.01	-
	mg/L	12/04/1996	0001	0.0875	#	-	-
	mg/L	12/04/1996	0002	0.0863	#	-	-
	mg/L	11/11/1997	0001	0.0970	#	-	-
	mg/L	11/11/1997	0002	0.0973	#	-	-
	mg/L	10/11/1998	0001	0.0743	#	-	-
	mg/L	10/11/1998	0002	0.0746	#	-	-
	mg/L	09/25/1999	0001	0.0847	#	-	-
	mg/L	10/03/2000	0001	0.0773	#	0.002	-
	mg/L	10/30/2001	0001	0.0928	#	0.0001	-
	mg/L	10/30/2001	0002	0.0948	#	0.0001	-
	mg/L	10/08/2002	0001	0.0603	#	0.0002	-
	mg/L	10/28/2003	0001	0.0649	#	0.0001	-
	mg/L	11/09/2004	0001	0.063	#	6.6E-05	-
Molybdenum	mg/L	11/19/1995	0001	0.06	#	0.01	-
	mg/L	11/19/1995	N001	0.07	#	0.01	-
	mg/L	12/04/1996	0001	0.0493	#	-	-
	mg/L	12/04/1996	0002	0.0501	#	-	-
	mg/L	11/11/1997	0001	0.0838	#	-	-
	mg/L	11/11/1997	0002	0.0811	#	-	-
	mg/L	10/11/1998	0001	0.104	#	-	-
	mg/L	10/11/1998	0002	0.108	#	-	-
	mg/L	09/25/1999	0001	0.0898	#	-	-
	mg/L	10/03/2000	0001	0.068	#	0.0004	-
	mg/L	10/30/2001	0001	0.0395	#	0.0019	-
	mg/L	10/30/2001	0002	0.0417	#	0.0019	-
	mg/L	10/08/2002	0001	0.0502	#	0.003	-
	mg/L	10/28/2003	0001	0.0226	#	0.0017	-
	mg/L	11/09/2004	0001	0.026	#	0.00017	-

SURFACE WATER QUALITY DATA BY LOCATION (USEE102) FOR SITE CAN01, Canonsburg Disposal Site
LOCATION: 0603 WS CHARTIERS CREEK UDR CONRAIL OVPS
REPORT DATE: 9/13/2005 4:14 pm

PARAMETER	UNITS	SAMPLE:		RESULT	QUALIFIERS:			DETECTION LIMIT	UN- CERTAINTY
		DATE	ID		LAB	DATA	QA		
Nitrate as NO3	mg/L	11/19/1995	N001	12			#	1	-
	mg/L	12/04/1996	0001	12.200			#	-	-
	mg/L	12/04/1996	0002	12.300			#	-	-
ORP of Zobell Solution	mV	10/03/2000	N001	224			#	-	-
	mV	10/30/2001	N001	243			#	-	-
Oxidation Reduction Potent	mV	12/04/1996	N001	132			#	-	-
	mV	11/11/1997	N001	174			#	-	-
	mV	10/11/1998	N001	167			#	-	-
	mV	09/25/1999	N001	30			#	-	-
	mV	10/03/2000	N001	220			#	-	-
	mV	10/30/2001	N001	-52			#	-	-
	mV	10/08/2002	N001	-65			#	-	-
	mV	10/28/2003	N001	81			#	-	-
	mV	11/09/2004	N001	188.4			#	-	-
pH	s.u.	11/19/1995	N001	7.66			#	0.1	-
	s.u.	12/04/1996	N001	7.69			#	-	-
	s.u.	11/11/1997	N001	7.83			#	-	-
	s.u.	10/11/1998	N001	7.80			#	-	-
	s.u.	09/25/1999	N001	8.32			#	-	-
	s.u.	10/03/2000	N001	8.01			#	-	-
	s.u.	10/30/2001	N001	8.03			#	-	-
	s.u.	10/08/2002	N001	8.24			#	-	-
	s.u.	10/28/2003	N001	7.32			#	-	-
	s.u.	11/09/2004	N001	7.32			#	-	-
Potassium	mg/L	11/19/1995	0001	5.4			#	0.1	-
	mg/L	11/19/1995	N001	5.6			#	0.1	-
	mg/L	12/04/1996	0001	4.060			#	-	-
	mg/L	12/04/1996	0002	4.050			#	-	-
	mg/L	11/11/1997	0001	5.400			#	-	-
	mg/L	11/11/1997	0002	5.390			#	-	-
	mg/L	10/11/1998	0001	7.040			#	-	-
	mg/L	10/11/1998	0002	6.980			#	-	-
	mg/L	09/25/1999	0001	8.450			#	-	-
	mg/L	10/03/2000	0001	6.780			#	0.0327	-
	mg/L	10/30/2001	0001	8.090	E	J	#	0.0151	-
	mg/L	10/30/2001	0002	8.260	E	J	#	0.0151	-
	mg/L	10/08/2002	0001	7.060			#	0.0259	-
	mg/L	10/28/2003	0001	3.680			#	0.0091	-

SURFACE WATER QUALITY DATA BY LOCATION (USEE102) FOR SITE CAN01, Canonsburg Disposal Site
LOCATION: 0603 WS CHARTIERS CREEK UDR CONRAIL OVPS
REPORT DATE: 9/13/2005 4:14 pm

PARAMETER	UNITS	SAMPLE:		RESULT	QUALIFIERS:			DETECTION LIMIT	UN- CERTAINTY
		DATE	ID		LAB	DATA	QA		
Potassium	mg/L	11/09/2004	0001	5.400			#	0.064	-
Selenium	mg/L	11/11/1997	0001	0.0010	U		#	0.001	-
	mg/L	11/11/1997	0002	0.0010	U		#	0.001	-
	mg/L	10/11/1998	0001	0.0010	U		#	0.001	-
	mg/L	10/11/1998	0002	0.0010	U		#	0.001	-
	mg/L	09/25/1999	0001	0.00046	B		#	-	-
	mg/L	10/03/2000	0001	0.0004	B		#	0.0001	-
Sodium	mg/L	11/19/1995	0001	72			#	1	-
	mg/L	11/19/1995	N001	75			#	1	-
	mg/L	12/04/1996	0001	41.300			#	-	-
	mg/L	12/04/1996	0002	41.000			#	-	-
	mg/L	11/11/1997	0001	53.000			#	-	-
	mg/L	11/11/1997	0002	53.400			#	-	-
	mg/L	10/11/1998	0001	69.600			#	-	-
	mg/L	10/11/1998	0002	69.300			#	-	-
	mg/L	09/25/1999	0001	162.000			#	-	-
	mg/L	10/03/2000	0001	96.700			#	0.302	-
	mg/L	10/30/2001	0001	182.000			#	0.0074	-
	mg/L	10/30/2001	0002	185.000			#	0.0074	-
	mg/L	10/08/2002	0001	155.000			#	0.895	-
	mg/L	10/28/2003	0001	37.800			#	0.0064	-
	mg/L	11/09/2004	0001	35.000			#	0.0046	-
Specific Conductance	umhos/c	11/19/1995	N001	582			#	1	-
	umhos/c	12/04/1996	N001	705			#	-	-
	umhos/c	11/11/1997	N001	817			#	-	-
	umhos/c	10/11/1998	N001	861			#	-	-
	umhos/c	09/25/1999	N001	1791			#	-	-
	umhos/c	10/03/2000	N001	1050			#	-	-
	umhos/c	10/30/2001	N001	1700			#	-	-
	umhos/c	10/08/2002	N001	1324			#	-	-
	umhos/c	10/28/2003	N001	595			#	-	-
	umhos/c	11/09/2004	N001	792			#	-	-
Sulfate	mg/L	11/19/1995	0001	124			#	1	-
	mg/L	12/04/1996	0001	121.000			#	-	-
	mg/L	12/04/1996	0002	121.000			#	-	-
	mg/L	11/11/1997	0001	169.000			#	-	-
	mg/L	11/11/1997	0002	168.000			#	-	-
	mg/L	10/11/1998	0001	153.000			#	-	-

SURFACE WATER QUALITY DATA BY LOCATION (USEE102) FOR SITE CAN01, Canonsburg Disposal Site
LOCATION: 0603 WS CHARTIERS CREEK UDR CONRAIL OVPS
REPORT DATE: 9/13/2005 4:14 pm

PARAMETER	UNITS	SAMPLE:		RESULT	QUALIFIERS:			DETECTION LIMIT	UN- CERTAINTY
		DATE	ID		LAB	DATA	QA		
Sulfate	mg/L	10/11/1998	0002	152.000			#	-	-
	mg/L	09/25/1999	0001	438.000			#	-	-
	mg/L	10/03/2000	0001	240.000			#	0.0589	-
	mg/L	10/30/2001	0001	516.000			#	0.409	-
	mg/L	10/30/2001	0002	522.000			#	0.409	-
	mg/L	10/08/2002	0001	371.000			#	0.1965	-
	mg/L	10/28/2003	0001	90.000			#	0.153	-
	mg/L	11/09/2004	0001	93			#	5	-
Temperature	C	11/19/1995	N001	6.4			#	0.1	-
	C	12/04/1996	N001	5.7			#	-	-
	C	11/11/1997	N001	8.6			#	-	-
	C	10/11/1998	N001	12.1			#	-	-
	C	09/25/1999	N001	17.0			#	-	-
	C	10/03/2000	N001	18.1			#	-	-
	C	10/30/2001	N001	9.2			#	-	-
	C	10/08/2002	N001	16.2			#	-	-
	C	10/28/2003	N001	9.26			#	-	-
	C	11/09/2004	N001	6.19			#	-	-
Temperature of Zobell Solu	C	10/03/2000	N001	22.2			#	-	-
	C	10/30/2001	N001	10.6			#	-	-
Total Dissolved Solids	mg/L	11/19/1995	0001	550			#	10	-
	mg/L	12/04/1996	0001	427			#	-	-
	mg/L	12/04/1996	0002	433			#	-	-
	mg/L	11/11/1997	0001	487			#	-	-
	mg/L	11/11/1997	0002	500			#	-	-
	mg/L	10/11/1998	0001	558			#	-	-
	mg/L	10/11/1998	0002	555			#	-	-
	mg/L	09/25/1999	0001	1000			#	-	-
	mg/L	10/03/2000	0001	650			#	10	-
Turbidity	NTU	11/11/1997	N001	9.90			#	-	-
	NTU	10/11/1998	N001	27.0			#	-	-
	NTU	10/03/2000	N001	8.03			#	-	-
	NTU	10/28/2003	N001	23.9			#	-	-
	NTU	11/09/2004	N001	2.77			#	-	-
Uranium	mg/L	11/19/1995	0001	0.001	U		#	0.001	-
	mg/L	11/19/1995	N001	0.001	U		#	0.001	-
	mg/L	12/04/1996	0001	0.0010	U		#	0.001	-
	mg/L	12/04/1996	0002	0.0010	U		#	0.001	-

SURFACE WATER QUALITY DATA BY LOCATION (USEE102) FOR SITE CAN01, Canonsburg Disposal Site
LOCATION: 0603 WS CHARTIERS CREEK UDR CONRAIL OVPS
REPORT DATE: 9/13/2005 4:14 pm

PARAMETER	UNITS	SAMPLE:		RESULT	QUALIFIERS:			DETECTION LIMIT	UN- CERTAINTY
		DATE	ID		LAB	DATA	QA		
Uranium	mg/L	11/11/1997	0001	0.0010	U		#	0.001	-
	mg/L	11/11/1997	0002	0.0010	U		#	0.001	-
	mg/L	10/11/1998	0001	0.0010	U		#	0.001	-
	mg/L	10/11/1998	0002	0.0010	U		#	0.001	-
	mg/L	09/25/1999	0001	0.00020	U		#	0.0002	-
	mg/L	10/03/2000	0001	0.00068	B	U	#	0.0001	-
	mg/L	10/30/2001	0001	0.0011		U	#	0.0001	-
	mg/L	10/30/2001	0002	0.001		U	#	0.0001	-
	mg/L	10/08/2002	0001	0.00044	B		#	0.0001	-
	mg/L	10/28/2003	0001	0.00060	B		#	0.0001	-
	mg/L	11/09/2004	0001	0.00025			#	8.3E-06	-

RECORDS: SELECTED FROM USEE102 WHERE site_code='CAN01' AND location_code in('0601','0602','0603') AND quality_assurance = TRUE
AND (data_validation_qualifiers IS NULL OR data_validation_qualifiers NOT LIKE '%R%' AND data_validation_qualifiers NOT LIKE
'%X%') AND DATE_SAMPLED between #1/1/1995# and #12/31/2005#

SAMPLE ID CODES: 000X = Filtered sample (0.45 µm). N00X = Unfiltered sample. X = replicate number.

LAB QUALIFIERS:

- * Replicate analysis not within control limits.
- + Correlation coefficient for MSA < 0.995.
- > Result above upper detection limit.
- A TIC is a suspected aldol-condensation product.
- B Inorganic: Result is between the IDL and CRDL. Organic: Analyte also found in method blank.
- C Pesticide result confirmed by GC-MS.
- D Analyte determined in diluted sample.
- E Inorganic: Estimate value because of interference, see case narrative. Organic: Analyte exceeded calibration range of the GC-MS.
- H Holding time expired, value suspect.
- I Increased detection limit due to required dilution.
- J Estimated
- M GFAA duplicate injection precision not met.
- N Inorganic or radiochemical: Spike sample recovery not within control limits. Organic: Tentatively identified compound (TIC).
- P > 25% difference in detected pesticide or Arochlor concentrations between 2 columns.
- S Result determined by method of standard addition (MSA).
- U Analytical result below detection limit.
- W Post-digestion spike outside control limits while sample absorbance < 50% of analytical spike absorbance.
- X Laboratory defined (USEPA CLP organic) qualifier, see case narrative.
- Y Laboratory defined (USEPA CLP organic) qualifier, see case narrative.
- Z Laboratory defined (USEPA CLP organic) qualifier, see case narrative.

DATA QUALIFIERS:

- F Low flow sampling method used.
- J Estimated value.
- Q Qualitative result due to sampling technique
- U Parameter analyzed for but was not detected.
- G Possible grout contamination, pH > 9.
- L Less than 3 bore volumes purged prior to sampling.
- R Unusable result.
- X Location is undefined.

QA QUALIFIER: # = validated according to Quality Assurance guidelines.