


DRAWING NUMBER

DRAWING NUMBER
8770-C-057
SH 5

DRAWING NUMBER

PLAN HOLD CORPORATION - IRVINE, CALIFORNIA
REPORT NUMBER 0704PLAN HOLD CORPORATION - IRVINE, CALIFORNIA
REPORT NUMBER 0704PLAN HOLD CORPORATION - IRVINE, CALIFORNIA
REPORT NUMBER 0704

8770-C-057 SH 5

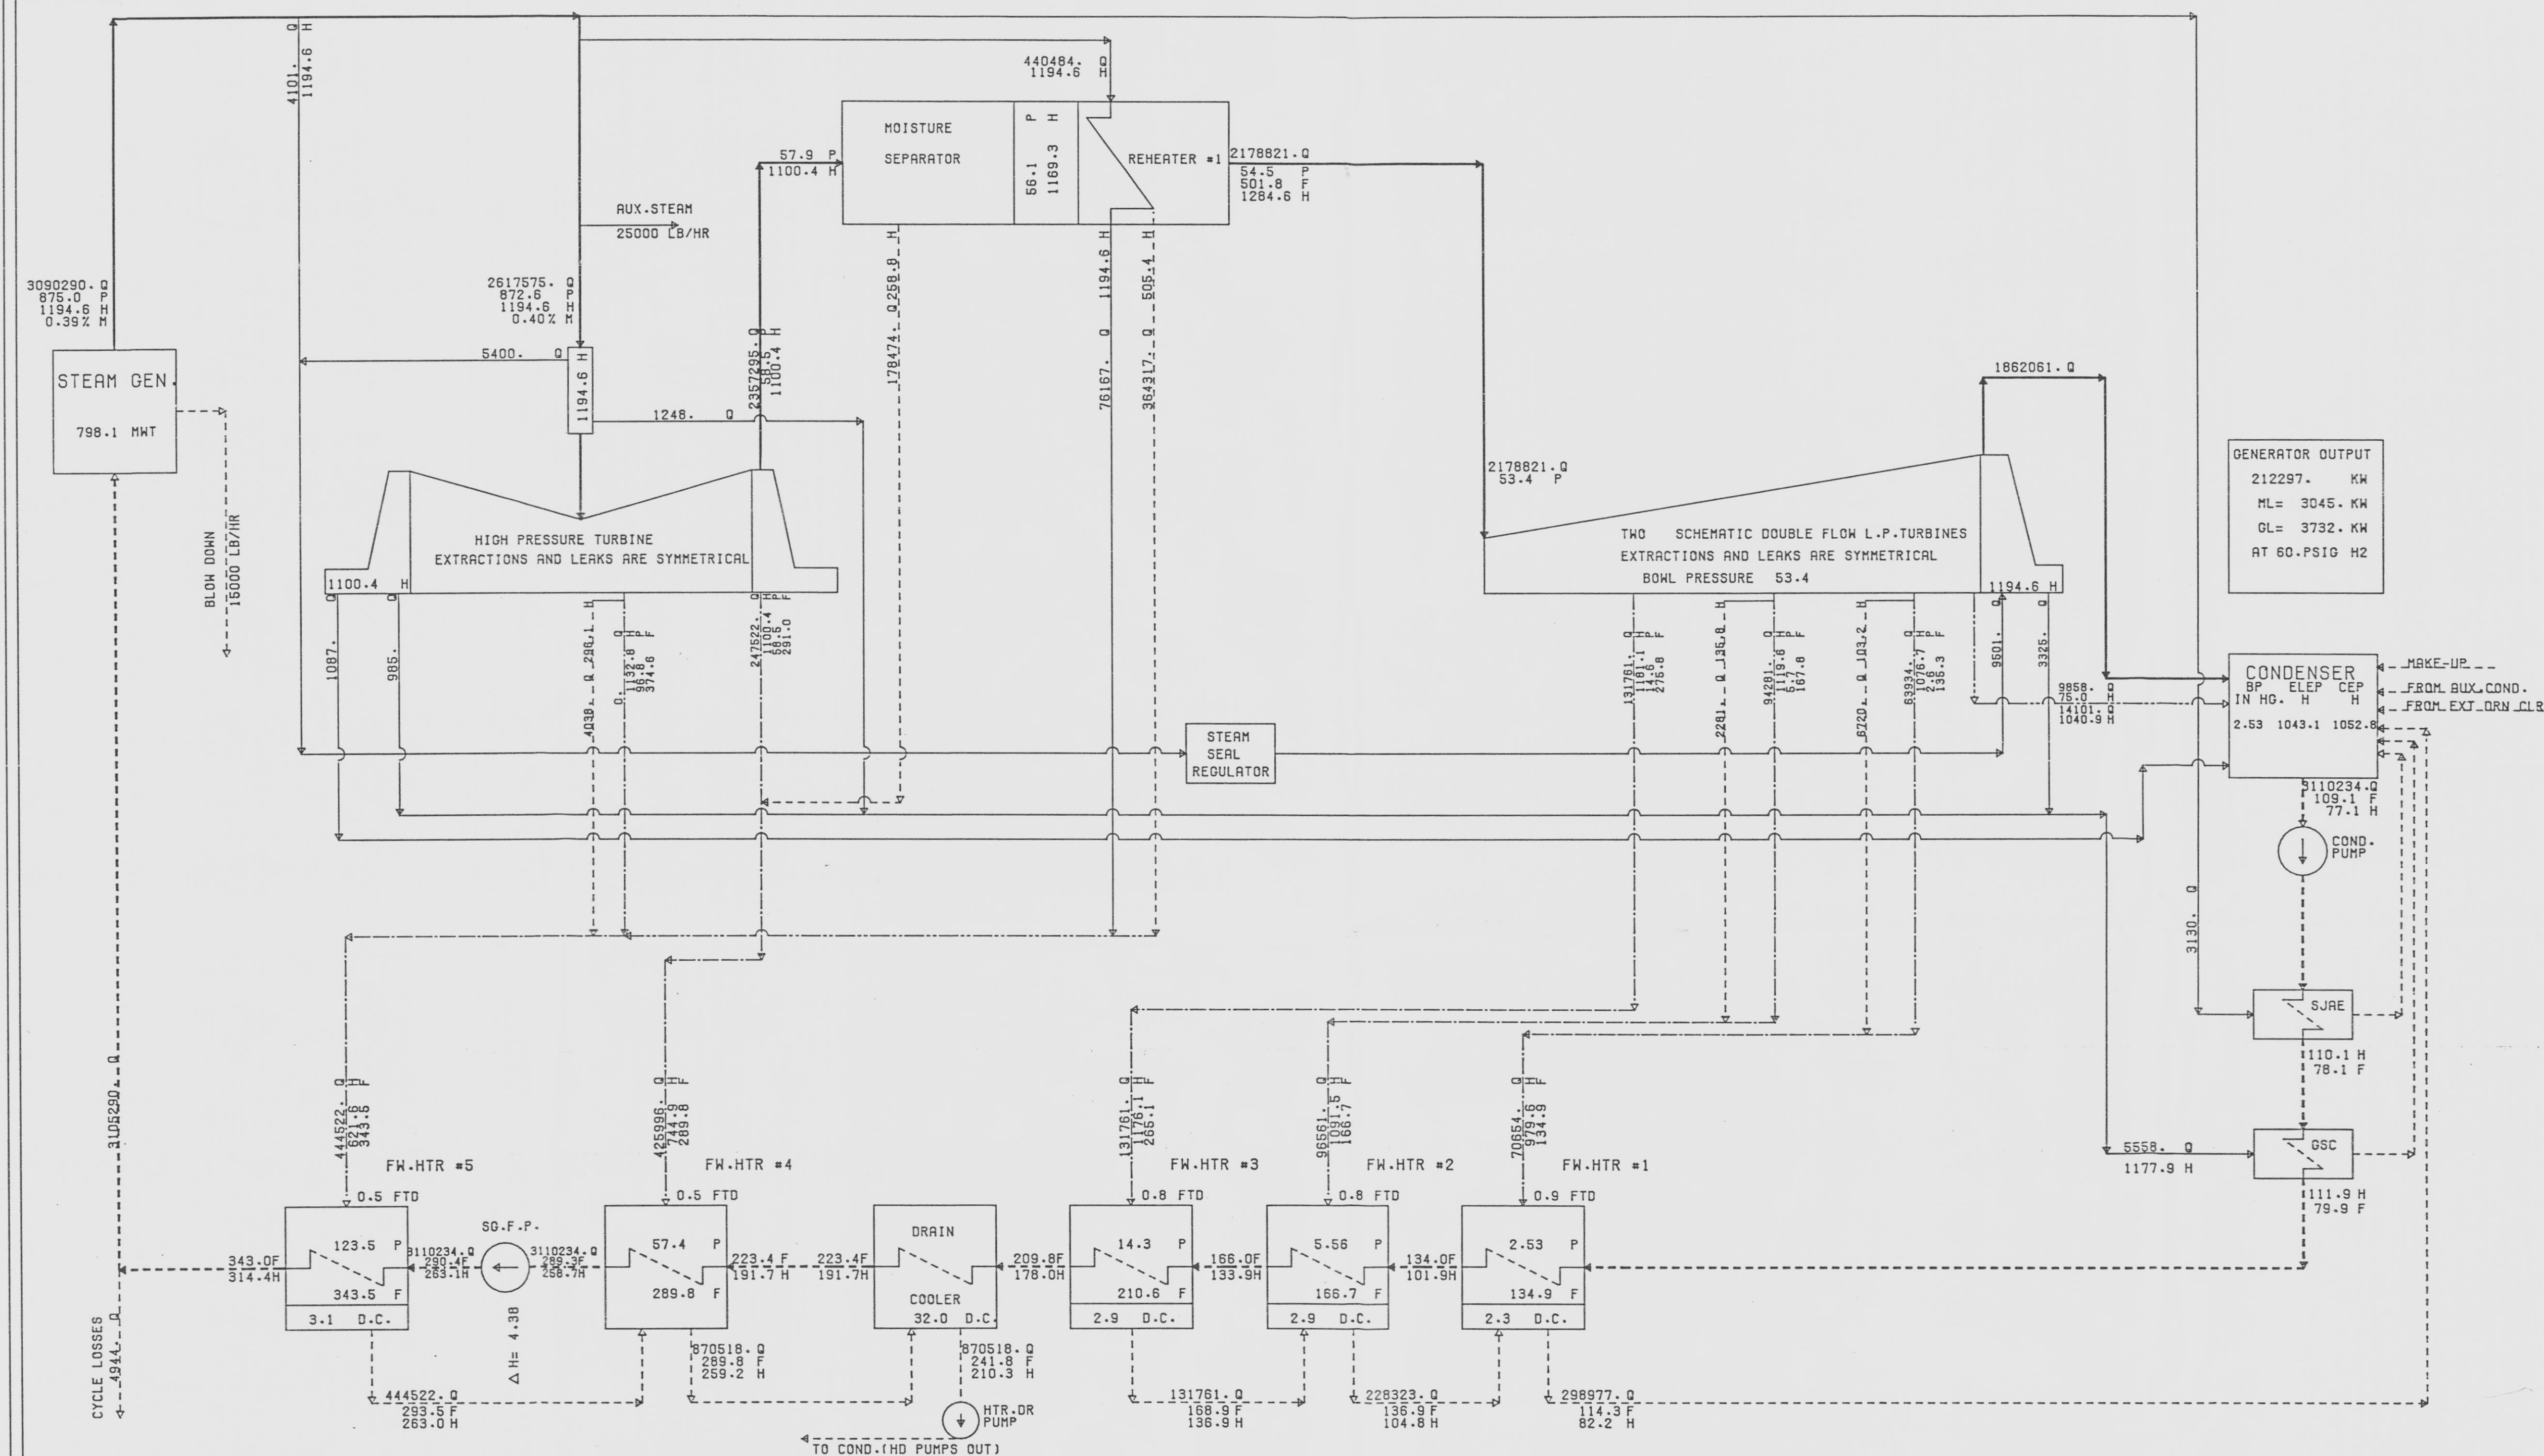

PERFORMANCE

GROSS GENERATION
KW.
212297.TURBINE HEAT-RATE
BTU/KW-HR
12812.6

LEGEND

Q---FLOW-LBS/HR
F---TEMPERATURE- F
P---PRESSURE-LBS/SQ. IN ABS.
H---ENTHALPY OF STEAM-BTU/LB
FTD---TERMINAL DIFFERENCE (F)
ELEP-EXPANSION LINE END POINT
UEEP-USED ENERGY END POINT
D.C.-DRAIN COOLER APPROACH (F)
S.C.-SUBCOOLING (F)

--- STEAM
--- WATER
--- EXTRACTION STEAM
--- TWO PHASE FLOW
--- MAIN PATH

SHEET NO	THROTTLE FLOW LBS/HR	THROTTLE PRESSURE PSIA	BACK PRESSURE IN. HG ABS	CYCLE LOSSES LBS/HR
1.	10722329.	852	2.53	18697.
2.	10146369.	853	2.53	17737.
3.	7640832.	861	2.53	13549.
4.	5064205.	867	2.53	9174.
5.	2617575.	873	2.53	4944.

BLOW DOWN LBS/HR	NOTES
15000.	STRETCH POWER
15000.	2570 MWT
15000.	75% LOAD POINT
15000.	50% LOAD POINT
15000.	25% LOAD POINT

THIS DOCUMENT IS THE PROPERTY OF EBASCO SERVICES INCORPORATED. ITS USE IS EXPRESSLY RESTRICTED BY THE TERMS OF THE CONTRACT, DATED AS OF AUGUST 10, 1968 BETWEEN EBASCO SERVICES INCORPORATED AND FLORIDA POWER & LIGHT COMPANY.

FLORIDA POWER & LIGHT COMPANY
ST. LUCIE PLANT
1976 - 890,000 KW INSTALLATION UNIT NO.1
HEAT BALANCE
2690 MWT CONSTANT BACK PRESSURE
AT 800 MWT LOAD POINT

EBASCO SERVICES INCORPORATED NEW YORK

SCALE-NONE APPROVED DATE 9-8-82

DIV. *W. B. Santos*
DR. *W. B. Santos*
CH. *W. B. Santos*

8770-C-057
SH 5

NO.	DATE	REVISION	BY	CH.	APPROVED