



International Agreement Report

Assessment of NEPTUN Reflooding Experiments 5050 and 5052 with TRACE V5.0 Patch 5

Prepared by:
S. Hillberg

VTT Technical Research Centre of Finland Ltd
P.O. Box 1000
FI-02044 VTT, Finland

K. Tien, NRC Project Manager

**Division of Systems Analysis
Office of Nuclear Regulatory Research
U.S. Nuclear Regulatory Commission
Washington, DC 20555-0001**

Manuscript Completed: December 2017
Date Published: February 2019

Prepared as part of
The Agreement on Research Participation and Technical Exchange
Under the Thermal-Hydraulic Code Applications and Maintenance Program (CAMP)

**Published by
U.S. Nuclear Regulatory Commission**

AVAILABILITY OF REFERENCE MATERIALS IN NRC PUBLICATIONS

NRC Reference Material

As of November 1999, you may electronically access NUREG-series publications and other NRC records at NRC's Library at www.nrc.gov/reading-rm.html. Publicly released records include, to name a few, NUREG-series publications; *Federal Register* notices; applicant, licensee, and vendor documents and correspondence; NRC correspondence and internal memoranda; bulletins and information notices; inspection and investigative reports; licensee event reports; and Commission papers and their attachments.

NRC publications in the NUREG series, NRC regulations, and Title 10, "Energy," in the *Code of Federal Regulations* may also be purchased from one of these two sources.

1. The Superintendent of Documents

U.S. Government Publishing Office
Mail Stop IDCC
Washington, DC 20402-0001
Internet: bookstore.gpo.gov
Telephone: (202) 512-1800
Fax: (202) 512-2104

2. The National Technical Information Service

5301 Shawnee Road
Alexandria, VA 22312-0002
www.ntis.gov
1-800-553-6847 or, locally, (703) 605-6000

A single copy of each NRC draft report for comment is available free, to the extent of supply, upon written request as follows:

Address: **U.S. Nuclear Regulatory Commission**
Office of Administration
Multimedia, Graphics, and Storage &
Distribution Branch
Washington, DC 20555-0001
E-mail: distribution.resource@nrc.gov
Facsimile: (301) 415-2289

Some publications in the NUREG series that are posted at NRC's Web site address www.nrc.gov/reading-rm/doc-collections/nuregs are updated periodically and may differ from the last printed version. Although references to material found on a Web site bear the date the material was accessed, the material available on the date cited may subsequently be removed from the site.

Non-NRC Reference Material

Documents available from public and special technical libraries include all open literature items, such as books, journal articles, transactions, *Federal Register* notices, Federal and State legislation, and congressional reports. Such documents as theses, dissertations, foreign reports and translations, and non-NRC conference proceedings may be purchased from their sponsoring organization.

Copies of industry codes and standards used in a substantive manner in the NRC regulatory process are maintained at—

The NRC Technical Library

Two White Flint North
11545 Rockville Pike
Rockville, MD 20852-2738

These standards are available in the library for reference use by the public. Codes and standards are usually copyrighted and may be purchased from the originating organization or, if they are American National Standards, from—

American National Standards Institute

11 West 42nd Street
New York, NY 10036-8002
www.ansi.org
(212) 642-4900

Legally binding regulatory requirements are stated only in laws; NRC regulations; licenses, including technical specifications; or orders, not in NUREG-series publications. The views expressed in contractor prepared publications in this series are not necessarily those of the NRC.

The NUREG series comprises (1) technical and administrative reports and books prepared by the staff (NUREG-XXXX) or agency contractors (NUREG/CR-XXXX), (2) proceedings of conferences (NUREG/CP-XXXX), (3) reports resulting from international agreements (NUREG/IA-XXXX), (4) brochures (NUREG/BR-XXXX), and (5) compilations of legal decisions and orders of the Commission and Atomic and Safety Licensing Boards and of Directors' decisions under Section 2.206 of NRC's regulations (NUREG-0750).

DISCLAIMER: This report was prepared under an international cooperative agreement for the exchange of technical information. Neither the U.S. Government nor any agency thereof, nor any employee, makes any warranty, expressed or implied, or assumes any legal liability or responsibility for any third party's use, or the results of such use, of any information, apparatus, product or process disclosed in this publication, or represents that its use by such third party would not infringe privately owned rights.



International Agreement Report

Assessment of NEPTUN Reflooding Experiments 5050 and 5052 with TRACE V5.0 Patch 5

Prepared by:
S. Hillberg

VTT Technical Research Centre of Finland Ltd
P.O. Box 1000
FI-02044 VTT, Finland

K. Tien, NRC Project Manager

**Division of Systems Analysis
Office of Nuclear Regulatory Research
U.S. Nuclear Regulatory Commission
Washington, DC 20555-0001**

Manuscript Completed: December 2017
Date Published: February 2019

Prepared as part of
The Agreement on Research Participation and Technical Exchange
Under the Thermal-Hydraulic Code Applications and Maintenance Program (CAMP)

**Published by
U.S. Nuclear Regulatory Commission**

ABSTRACT

NEPTUN experiments 5050 and 5052 have been simulated with TRACE V5.0 Patch 5. Calculation results were compared to experiment data received from OECD/NEA databank but, unfortunately, not all original experiment data was available. Uncertainties of the experimental data were not quantified in the original material nor were there enough available data in order to form an estimate. There is also uncertainty about radial placement of those thermocouples for which data is available.

Both simulations show qualitatively similar results: TRACE predicts higher temperature in the lower parts of the test section which leads to later quenching than in the experiment. In higher elevations temperatures are a closer match but there is still a significant difference in quenching times. Collapsed water level prediction is in reasonably good agreement in both experiments.

TABLE OF CONTENTS

	<u>Page</u>
ABSTRACT	iii
TABLE OF CONTENTS.....	v
LIST FIGURES	vii
LIST OF TABLES.....	ix
ABBREVIATIONS AND ACRONYMS	xi
1 INTRODUCTION.....	1
2 DESCRIPTION OF THE NEPTUN TEST FACILITY	3
3 REFLOODING EXPERIMENTS 5050 AND 5052.....	9
3.1 Estimation of Uncertainties	9
4 SIMULATION MODEL	11
5 SIMULATION RESULTS	15
5.1 Experiment 5050	15
5.2 Experiment 5052	29
6 CONCLUSIONS.....	43
7 REFERENCES.....	45

LIST OF FIGURES

	<u>Page</u>
Figure 1	Flow Diagram of the NEPTUN Facility. 4
Figure 2	NEPTUN Rod Bundle Test Section and Measurement Elevations. 5
Figure 3	Heater Bundle of the NEPTUN Facility..... 6
Figure 4	A Heater Rod of the NEPTUN Heater Bundle. 7
Figure 5	NEPTUN Simulation Model..... 9
Figure 6	5050 and 5052 Axial Power Profiles.10
Figure 7	Initial Cladding Temperatures for Simulation of Experiments 5050 and 5052.....13
Figure 8	Test Section Pressure (5050).15
Figure 9	Flooding Water Mass Flow (5050).16
Figure 10	Flooding Water Temperature (5050).13
Figure 11	Total Bundle Power (5050).14
Figure 12	Collapsed Water Level (5050).....15
Figure 13	Quench Front Locations (5050).....16
Figure 14	Heat Structure Heat Release (5050).....17
Figure 15	Temperature at Measurement Level 2 (5050).18
Figure 16	Temperature at Measurement Level 3 (5050).19
Figure 17	Temperature at Measurement Level 4 (5050).20
Figure 18	Temperature at Measurement Level 5 (5050).21
Figure 19	Temperature at Measurement Level 6 (5050).22
Figure 20	Temperature at Measurement Level 7 (5050).23
Figure 21	Temperature at Measurement Level 8 (5050).24
Figure 22	Entrainment in the Experiment and in the Simulation (5050).....25
Figure 23	Test Section Pressure (5052).26
Figure 24	Flooding Water Mass Flow (5052).27
Figure 25	Flooding Water Temperature (5052).28
Figure 26	Total Bundle Power (5052).29
Figure 27	Collapsed Water Level (5052).....30
Figure 28	Quench Front Locations (5052).....31
Figure 29	Heat Structure Heat Release (5052).....32
Figure 30	Temperature at Measurement Level 3 (5052).33
Figure 31	Temperature at Measurement Level 5 (5052).34
Figure 32	Temperature at Measurement Level 6 (5052).35
Figure 33	Temperature at Measurement Level 8 (5052).40
Figure 34	Entrainment in the Experiment and in the Simulation (5052).....41

LIST OF TABLES

	<u>Page</u>
Table 1 Measurement Level Elevations from the Bottom of Heated Section.....	5
Table 2 Initial Conditions of the Experiments.	9
Table 3 Probable Errors According to Ref. 3.	9
Table 4 Radial Geometry of the Heater Element Heat Structures.	12

ABBREVIATIONS AND ACRONYMS

CAMP	Code Applications and Maintenance Program
EIR	Eidgenössisches Institut für Reaktorforschung
LOCA	Loss Of Coolant Accident
PSI	Paul Scherrer Institute
PWR	Pressurized Water Reactor
SIN	Schweizerisches Institut für Nuklearphysik
TRACE	TRAC/RELAP Advanced Computational Engine
U.S. NRC	United States Nuclear Regulatory Commission
VTT	VTT Technical Research Centre of Finland Ltd

1 INTRODUCTION

This report is based on NEPTUN reflooding data, experiments 5050 and 5052, received from OECD/NEA databank (Ref. 1, Ref. 2). The simulations were performed using TRACE V5.0 Patch 5 and SNAP 2.5.8. This report is produced as in-kind contribution to the U.S. NRC CAMP program (Code Applications and Maintenance Program). The funding for this work has been provided by VTT's COVA project (Comprehensive and systematic validation of independent safety analysis tools) which is a part of the SAFIR2018 programme (The Finnish Research Programme on Nuclear Power Plant Safety 2015-2018). The two cases have been previously calculated in NUREG/IA series in 1992 RELAP5 validation (Ref. 3). Unfortunately it was not possible to digitalize this data into this report for comparison purposes as the quality of the graphs has been greatly deteriorated during the previous printing and scanning processes.

2 DESCRIPTION OF THE NEPTUN TEST FACILITY

The NEPTUN experimental facility was designed and built at Eidgenössisches Institut für Reaktorforschung (EIR) that merged with Schweizerisches Institut für Nuklearphysik (SIN) to form Paul Scherrer Institute (PSI) in 1988. NEPTUN facility was completed around 1980 and the experiments made were the full-length emergency cooling heat transfer tests for LOFT (Loss of Fluid Tests) test facility. The heater bundle of NEPTUN facility holds 33 electrical heater elements and 4 guide tubes that simulate a section of the LOFT nuclear core. The outer dimensions of the rods were similar to those of a PWR fuel rods except being half length in size (1.68 m heated length, heated rods with diameter of 10.7 mm, $p/d = 1.33$). (Ref. 3, Ref. 4)

The general objective of the NEPTUN tests was to contribute to the understanding of thermal-hydraulic and heat transfer behavior during the reflood phase of a loss of coolant accident (LOCA) in a pressurized water reactor (PWR). 40 reflooding experiments were performed in this facility during 1981-1983. Flow diagram and geometry of the NEPTUN facility are presented in Figures 1-4 (Ref. 4, Ref. 5). Rod cladding temperatures, fluid temperatures and differential pressures were measured at eight measurement levels, which are presented in Table 1. Only cladding temperature readings of unknown radial placement are available in the NEA datasets (Ref. 1, Ref. 2).

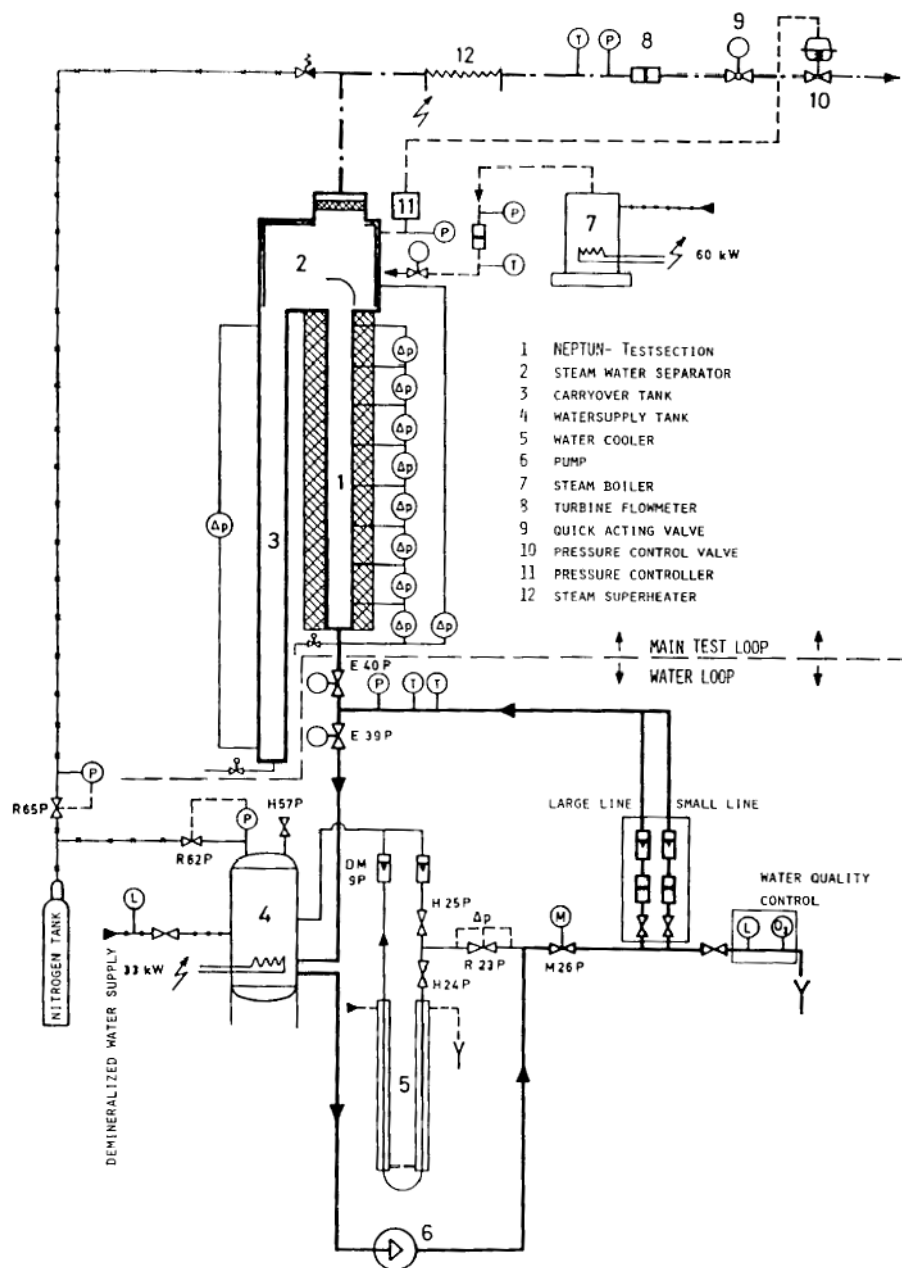


Figure 1 Flow Diagram of the NEPTUN Facility




Figure 2 NEPTUN Rod Bundle Test Section and Measurement Elevations

Table 1 Measurement Level Elevations from the Bottom of Heated Section

Measurement level	Elevation [mm]
1	50
2	282
3	514
4	746
5	978
6	1210
7	1442
8	1674




Figure 3 Heater Bundle of the NEPTUN Facility




Figure 4 A Heater Rod of the NEPTUN Heater Bundle

3 REFLOODING EXPERIMENTS 5050 AND 5052

40 reflood experiments were performed in the NEPTUN facility from 1981 to 1983. Unfortunately data for only two of these experiments is available through OECD/NEA databank. Experiment procedure started by bringing the flooding water in the circuit to desired conditions. The test section was kept at a defined experiment pressure and was filled with saturated steam. Power to the heater rods was then switched on. A short time before the cladding temperatures reached the desired value, a valve was opened and water was allowed into the test section. The power at the bundle was held constant until the end of the experiment. (Ref. 3)

Experiments 5050 and 5052 are similar to each other in every way except flooding rate which is 15 cm/s in 5050 and 2.5 cm/s in 5052. Initial conditions of the experiments are presented in Table 2. (Ref. 1, Ref. 2).

Table 2 Initial Conditions of the Experiments

	Experiment 5050	Experiment 5052
Pressure [bar]	4.1	4.1
Flood velocity [cm/s]	15	2.5
Subcooling temperature [°C]	78	78
Single rod power [kW]	2.45	2.45
Maximal initial cladding temperature [°C]	867	867

3.1 Estimation of Uncertainties

No estimation of uncertainties is presented in the available technical documentation. In 1992 NEPTUN data was used in validation of RELAP5 (Ref. 3) and probable errors were estimated using the available data from the experiment. For example data from individual pressure differential measurements were compared to the ones from the top and bottom of the bundle. The full data set was not available when writing this report so therefore similar estimation could not be performed. Estimations made in 1992 are presented in Table 3 to provide background information to the reader but they are not used elsewhere in this report.

Table 3 Probable Errors According to Ref. 3

Quantity	Probable error	Largest scattering min. to max of the data
Flooding water mass flow	$\pm 5.3 \%$	
Flooding water temperature	$\pm 0.5 \text{ }^{\circ}\text{C}$	
Test section pressure	$\pm 0.03 \text{ bar}$	0.42 bar during exp. 5050
Collapsed water level	$\pm 1.8 \%$	
Void fractions	± 0.04	
Rod cladding temperatures between all rods without external thermocouples	$\pm 5 \text{ }^{\circ}\text{C}$	48 $^{\circ}\text{C}$ during exp. 5050
Quench times between all rods without external thermocouples at measurement points 4 and 5	$\pm 1.2 \text{ s}$	2.5 s during exp. 5050

4 SIMULATION MODEL

The simulation model consists of fill and break boundary conditions, 20 cm inlet and outlet pipes, a 1.68 m long heated section of flow channel modelled with a vessel component and heat structures for heater elements, channel wall and guide tubes. The heated section was divided into 20 thermal-hydraulic cells while the inlet and outlet pipes consisted of single cells. Channel wall was modelled as 2 mm thick slab heat structure while the guide tubes are cylindrical heat structures. Thickness of the guide tubes is not revealed in the documentation so value of 1 mm was used as this was seen as a reasonable estimation of the probable thickness. Material of both of these heat structures is Inconel 600. Fill rate in the simulations was given as a constant velocity boundary condition while the exit break component maintained steady pressure. Unlike the static pressure and fill rate, measured heater element power was used in the simulations. Test section flow area was 0.00435 m² and hydraulic diameter was 1.17 cm. The simulation model and radial geometry of the heater element heat structures are presented in Figure 5 and Table 4 (Ref. 4, Ref. 6, Ref. 7, Ref. 8).

The model was first initialized by setting all heat structures to the same saturation temperature of both tests and then full power was turned on to the heater elements with no flow entering the test section. Once the maximum cladding temperature reached the specified value of 867 °C simulation was stopped, fine mesh reflood model was enabled and the state of the model was used as the initial state for both simulations. As radiation heat transfer was not modelled (due to difficult implementation and lack of all housing measurement data), heat transfer from the heating elements to the housing and guide tubes was possible only through the thermal-hydraulic cells. This affected the guide tube and housing temperatures - the guide tubes likely being colder than in the experiment while the housing being an unknown, as no heat flow to the insulation, due to insufficient data, was modelled. In NEPTUN experiments many temperature sensors were used but no data on housing or guide tube temperatures is available in the OECD/NEA data.

For each coarse mesh cell three permanent fine mesh cells were added. Cladding temperature measurement were taken from the closest permanent (2.8 cm long) fine mesh cell (see Table 1).




Figure 5 NEPTUN Smulation Model

Table 4 Radial Geometry of the Heater Element Heat Structures

Material	Inner radius [m]	Outer Radius [m]	Thickness [m]	Node count []
Kanthal A1	0	2.50E-03	2.50E-03	2
Boron-Nitride	2.50E-03	2.80E-03	3.00E-04	2
Inconel 600	2.80E-03	3.10E-03	3.00E-04	2
Copper	3.10E-03	3.90E-03	8.00E-04	2
Inconel 600	3.90E-03	4.20E-03	3.00E-04	2
Al ₂ O ₃	4.20E-03	4.50E-03	3.00E-04	2
Inconel 600	4.50E-03	5.00E-03	5.00E-04	2
Inconel 600	5.00E-03	5.36E-03	3.60E-04	2

Only the active length of the heater elements is modelled. This probably has some minor initial effect on quenching as axial conduction is not possible to (and possibly from) the non-heated sections of the rods. Additionally this has some effect on the initial temperature distribution. The axial power profile and initial temperature distributions before enabling the fine mesh reflood model are presented in Figures 6 and 7.




Figure 6 5050 and 5052 Axial Power Profiles




Figure 7 Initial Cladding Temperatures for Simulation of Experiments 5050 and 5052

5 SIMULATION RESULTS

5.1 Experiment 5050

Experiment 5050 is a high flood rate case with inlet velocity of 15 cm/s. Test section pressure, flooding rate, flooding water temperature and total bundle power area presented in Figures 8-11. Pressure, flooding rate and temperature are given as fixed boundaries while the test section power is used as shown in the data. All experimental data of 5050 is from Ref. 1.




Figure 8 Test Section Pressure (5050)




Figure 9 Flooding Water Mass Flow (5050)




Figure 10 Flooding Water Temperature (5050)




Figure 11 Total Bundle Power (5050)

Collapsed water level, shown in Figure 12, shows relatively good agreement with test data. As the experiment initial water level is in the heated section it is possible that in the experiment flooding was started slightly prematurely. For the simulation initial water level was set to fill only the inlet tube. During the simulation heated section doesn't fully quench unlike in the experiment (Figure 13). Experiment quench times for Figure 13 are estimated from cladding temperatures (which are presented later). Heat flow from heater elements dominates total heat structure heat release but during the first 15 seconds of the simulation other heat flows are not insignificant (Figure 14). It is, however, notable that uncertainties related to channel wall and guide tubes are relatively large, as discussed earlier.




Figure 12 Collapsed Water Level (5050)




Figure 13 Quench Front Locations (5050)




Figure 14 Heat Structure Heat Release (5050)

Temperature measurements from levels 2-8 are presented in Figures 15-21. In general, TRACE predicts higher temperatures and later quenching in the first two thirds of the test section. Both experiment and simulation agree that measurement levels 7 & 8 are quenched by the upper quench front but difference in timing is significant. In experiment measurement from level 7 shows earlier quenching than in level 8 which is probably caused by a difference in rod bundle sensor placement. TRACE predicts reasonably similar entrainment to the experiment (Figure 22).




Figure 15 Temperature at Measurement Level 2 (5050)




Figure 16 Temperature at Measurement Level 3 (5050)




Figure 17 Temperature at Measurement Level 4 (5050)




Figure 18 Temperature at Measurement Level 5 (5050)




Figure 19 Temperature at Measurement Level 6 (5050)




Figure 20 Temperature at Measurement Level 7 (5050)




Figure 21 Temperature at Measurement Level 8 (5050)




Figure 22 Entrainment in the Experiment and in the Simulation (5050)

5.2 Experiment 5052

Experiment 5052 is a low flood rate (2.5 cm/s) case with otherwise similar conditions to experiment 5050. Test section pressure, flooding rate, flooding water temperature and total bundle power area presented in Figures 23-26. Inlet temperature is measured from the unheated inlet cell. As the initial water level is set to be in this same partially steam-filled cell, mass and heat transfer occurs and temperature rises from the initial value. It is likely that the same behavior has occurred also in the actual test although the relatively large 20 cm single cell size neglects temperature stratification within this volume. As in the test 5050, pressure, flooding rate and temperature are given as fixed boundaries while the test section power is used as shown by the data. All experimental data of 5052 is from Ref. 2.




Figure 23 Test Section Pressure (5052)




Figure 24 Flooding Water Mass Flow (5052)




Figure 25 Flooding Water Temperature (5052)




Figure 26 Total Bundle Power (5052)

Like in test 5050, there is a good agreement between collapsed water level prediction and test result (Figure 27). Calculated quench fronts (with estimation of experiment quench times based on cladding temperatures) and energy releases are presented in Figures 28 and 29.




Figure 27 Collapsed Water Level (5052)




Figure 28 Quench Front Locations (5052)




Figure 29 Heat Structure Heat Release (5052)

Few temperature measurements are available for 5052, and for this analysis, one of them was discarded due to inconsistent behavior¹, perhaps due to sensor placement. Cladding temperatures of elevations 3, 5, 6 and 8 are presented in Figures 30-33. Results of the simulation are qualitatively similar to 5050 as in the lower parts of the test section predicted temperature tends to be higher and quenching is occurring later. Temperatures in elevations 6 & 8 are a better match to experiment although there is still a significant difference in quench times. TRACE predicts correctly that elevation 8 is quenched by the upper quench front. Entrainment is presented in Figure 34.

¹ Cladding temperature at measurement level 7 shows quenching significantly before upper or lower quench fronts reach the elevation.




Figure 30 Temperature at Measurement Level 3 (5052)




Figure 31 Temperature at Measurement Level 5 (5052)




Figure 32 Temperature at Measurement Level 6 (5052)




Figure 33 Temperature at Measurement Level 8 (5052)




Figure 34 Entrainment in the Experiment and in the Simulation (5052)

6 CONCLUSIONS

NEPTUN experiments 5050 and 5052 have been simulated with TRACE V5.0 Patch 5. Calculation results were compared to experiment data received from OECD/NEA databank but, unfortunately, not all original experiment data was available. Uncertainties of the experimental data were not quantified in the original material nor were there enough available data in order to form an estimate. There is also uncertainty about radial placement of those thermocouples for which data is available. Location of these thermocouples could provide insight into some of the behavior observed in experiments.

Both simulations show qualitatively similar results: TRACE predicts higher temperature in the lower parts of the test section which leads to later quenching than in the experiment. In higher elevations temperatures are a closer match but there is still a significant difference in quenching times. Collapsed water level prediction is in reasonably good agreement in both experiments. Detailed sets of measurement data would be needed for a more conclusive analysis.

7 REFERENCES

1. CSNI1012 NEPTUN/5050 data. OECD/NEA databank. Available at: <http://www.oecd-nea.org/tools/abstract/detail/csni1012/>
2. CSNI1013 NEPTUN/5052 data. OECD/NEA databank. Available at: <http://www.oecd-nea.org/tools/abstract/detail/csni1013/>
3. Richner, M., Analytis, G. Th., Aksan, N., 1992. Assessment of RELAP5/MOD2, Cycle 36.02, Using NEPTUN Reflooding Experiment Data. USNRC International Agreement Report, NUREG/IA-0054.
4. Grütter, H., Stierli, F., Aksan, S. N., Varadi, G., 1980. Neptun Bundle Reflooding experiments: Test Facility Description. Würenlingen, Switzerland.
5. Aksan, S. N., Stierli, F., Analytis, G. Th. Boil-Off Experiments with the EIR-NEPTUN Facility: Analysis and Code Assessment Overview Report. USNRC International Agreement Report, NUREG/IA-0040.
6. Kanthal A-1. Resistance heating wire and resistance wire. Datasheet. Available at: <http://www.kanthal.com/en/products/material-datasheets/wire/resistance-heating-wire-and-resistance-wire/kanthal-a-1/>
7. Thermal properties of aluminium oxide. Available at: <http://accuratus.com/alumox.html>
8. Thermal properties of copper. Available at: https://www.engineersedge.com/properties_of_metals.htm

BIBLIOGRAPHIC DATA SHEET

(See instructions on the reverse)

1. REPORT NUMBER
(Assigned by NRC, Add Vol., Supp., Rev.,
and Addendum Numbers, if any.)

NUREG/IA-0495

2. TITLE AND SUBTITLE

Assessment of NEPTUN Reflooding Experiments 5050 and 5052 with TRACE V5.0 Patch 5

3. DATE REPORT PUBLISHED

MONTH

February

YEAR

2019

4. FIN OR GRANT NUMBER

5. AUTHOR(S)

S. Hillberg

6. TYPE OF REPORT

Technical

7. PERIOD COVERED (Inclusive Dates)

8. PERFORMING ORGANIZATION - NAME AND ADDRESS (If NRC, provide Division, Office or Region, U. S. Nuclear Regulatory Commission, and mailing address; if contractor, provide name and mailing address.)

VTT Technical Research Centre of Finland Ltd
P.O. Box 1000
FI-02044 VTT, Finland

9. SPONSORING ORGANIZATION - NAME AND ADDRESS (If NRC, type "Same as above", if contractor, provide NRC Division, Office or Region, U. S. Nuclear Regulatory Commission, and mailing address.)

Division of Systems Analysis
Office of Nuclear Regulatory Research
U.S. Nuclear Regulatory Commission
Washington, D.C. 20555-0001

10. SUPPLEMENTARY NOTES

K. Tien, Project Manager

11. ABSTRACT (200 words or less)

NEPTUN experiments 5050 and 5052 have been simulated with TRACE V5.0 Patch 5. Calculation results were compared to experiment data received from OECD/NEA databank but, unfortunately, not all original experiment data was available. Uncertainties of the experimental data were not quantified in the original material nor were there enough available data in order to form an estimate. There is also uncertainty about radial placement of those thermocouples for which data is available. Both simulations show qualitatively similar results: TRACE predicts higher temperature in the lower parts of the test section which leads to later quenching than in the experiment. In higher elevations temperatures are a closer match but there is still a significant difference in quenching times. Collapsed water level prediction is in reasonably good agreement in both experiments.

12. KEY WORDS/DESCRIPTORS (List words or phrases that will assist researchers in locating the report.)

NEPTUN Test Facility
Eidgenössisches Institut für Reaktorforschung (EIR)
Schweizerisches Institut für Nuklearphysik (SIN)
Paul Scherrer Institute (PSI)
VTT Technical Research Centre of Finland Ltd (VTT)
Comprehensive and systematic validation of independent safety analysis tools (COVA)
The Finnish Research Programme on Nuclear Power Plant Safety (SAFIR)

13. AVAILABILITY STATEMENT

unlimited

14. SECURITY CLASSIFICATION

(This Page)


unclassified

(This Report)

unclassified

15. NUMBER OF PAGES

16. PRICE



Federal Recycling Program



UNITED STATES
NUCLEAR REGULATORY COMMISSION
WASHINGTON, DC 20555-0001

OFFICIAL BUSINESS



NUREG/IA-0495

Assessment of NEPTUN Reflooding Experiments 5050 and 5052 with TRACE V5.0 Patch 5

February 2019