



SEABROOK STATION
UPDATED FINAL SAFETY
ANALYSIS REPORT

Seabrook Site – 50 Mile Radius Regional Climatological
Data Stations


Figure 2.3-1

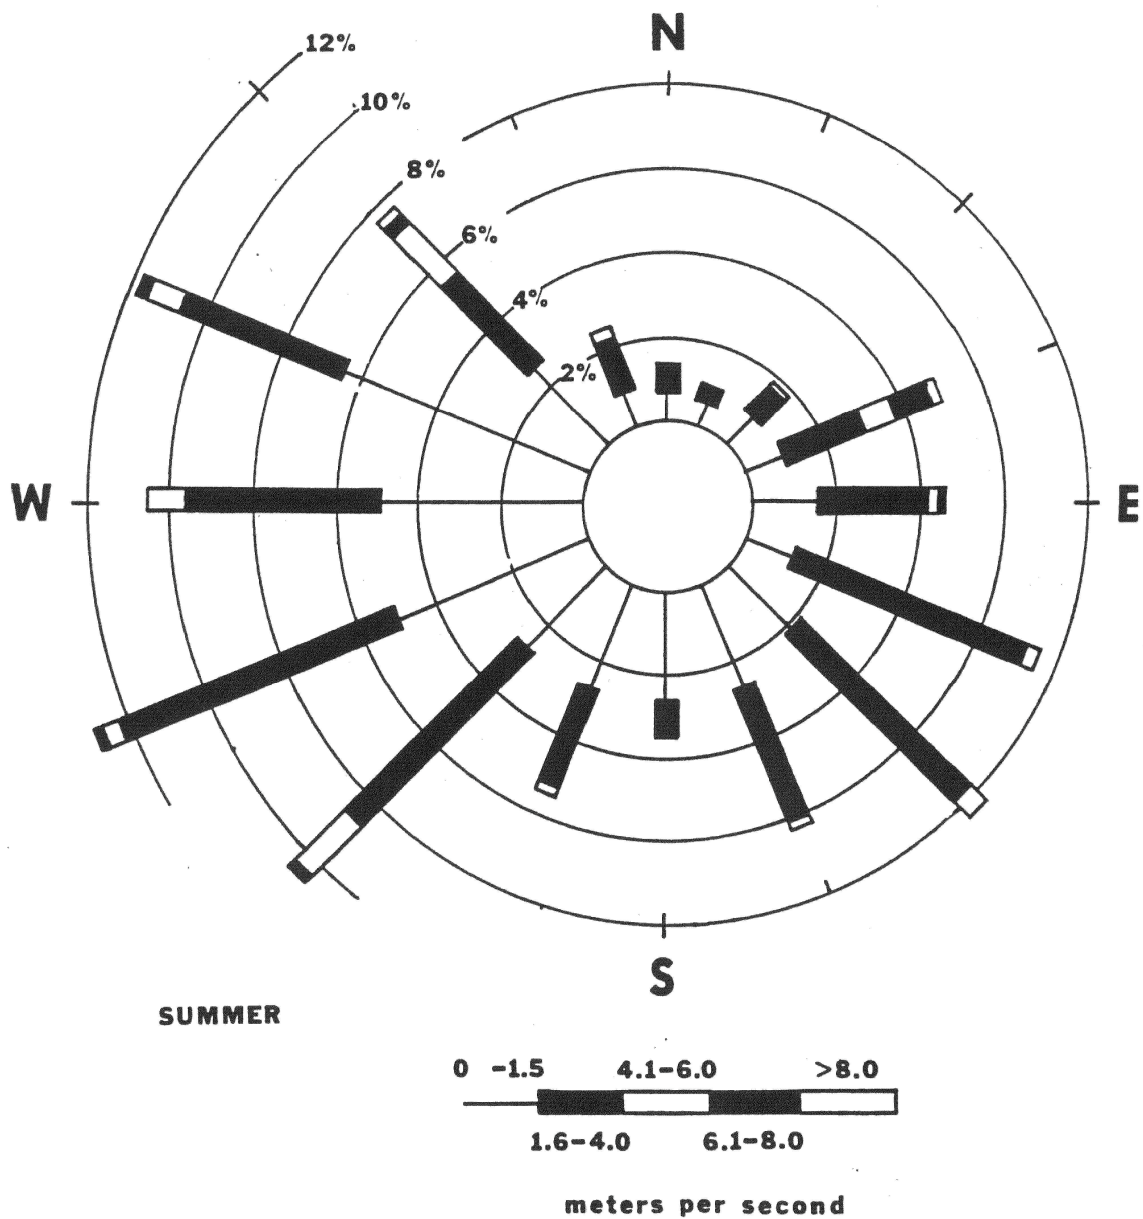


SEABROOK STATION UPDATED FINAL SAFETY ANALYSIS REPORT	Summer Wind Rose for the 30 ft. Level (June 1972 – August 1972)	
		Figure 2.3-3

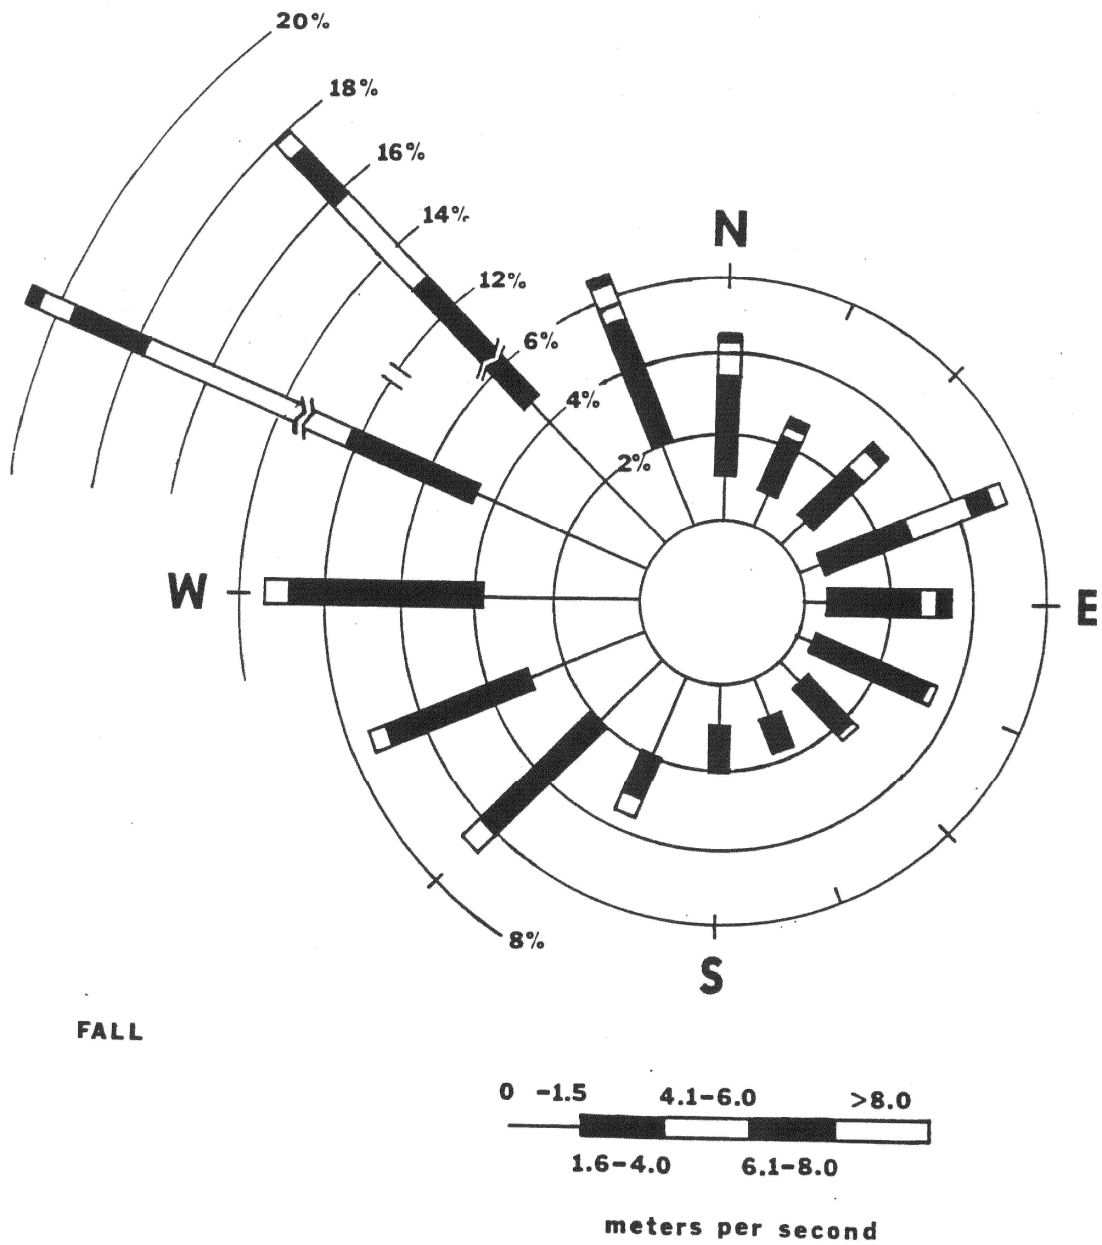

SEABROOK STATION UPDATED FINAL SAFETY ANALYSIS REPORT	Fall Wind Rose for the 30 ft. Level (November 1971 and September, October 1972)	
		Figure 2.3-4

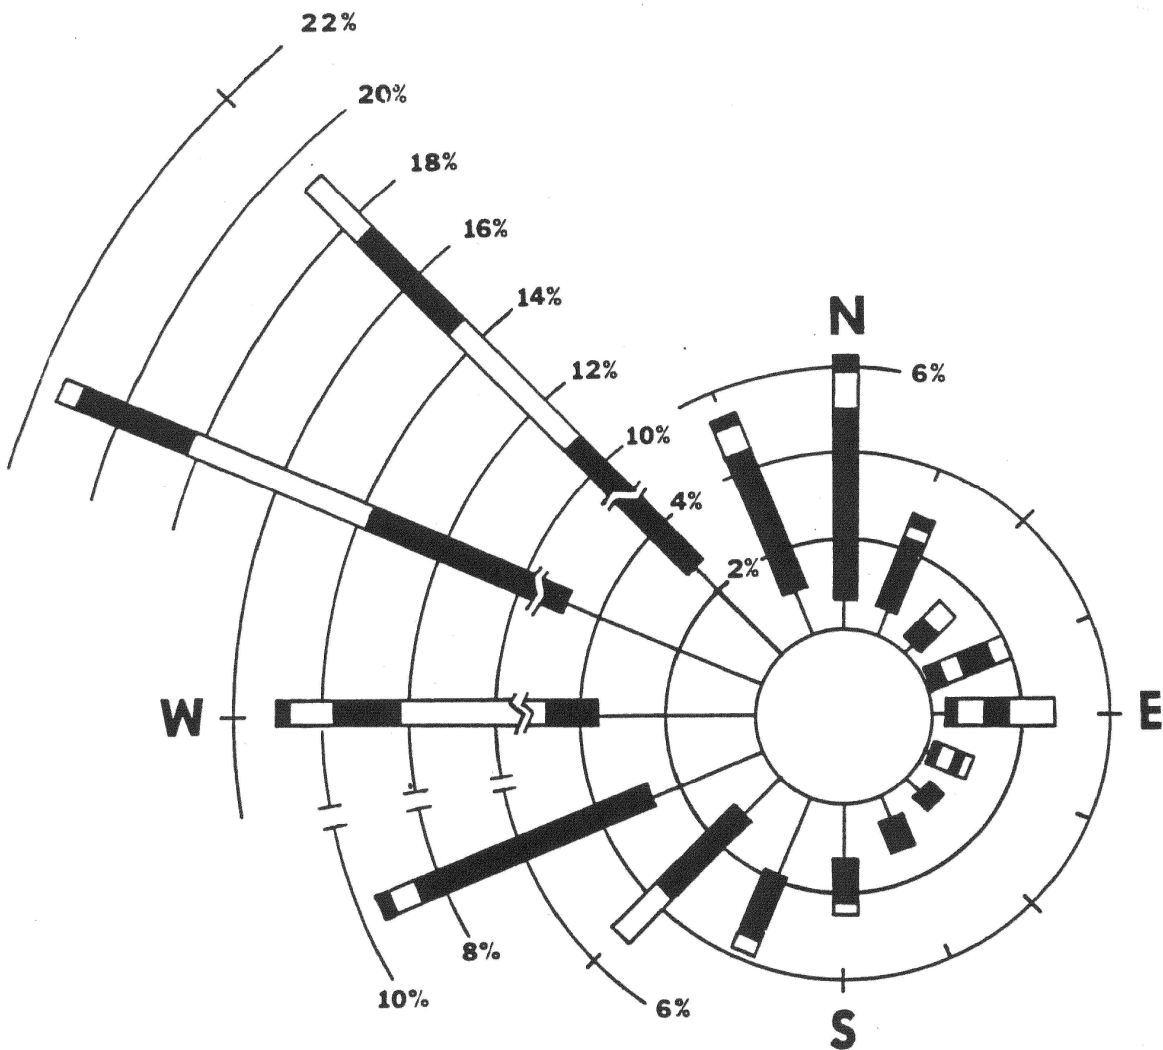


WINTER

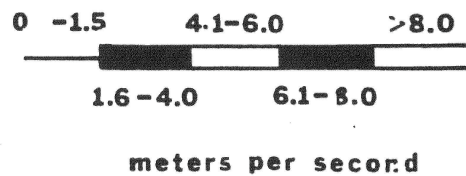

SEABROOK STATION
UPDATED FINAL SAFETY
ANALYSIS REPORT

Winter Wind Rose for the 30 ft. Level (December 1971 – February 1972)

Figure 2.3-5

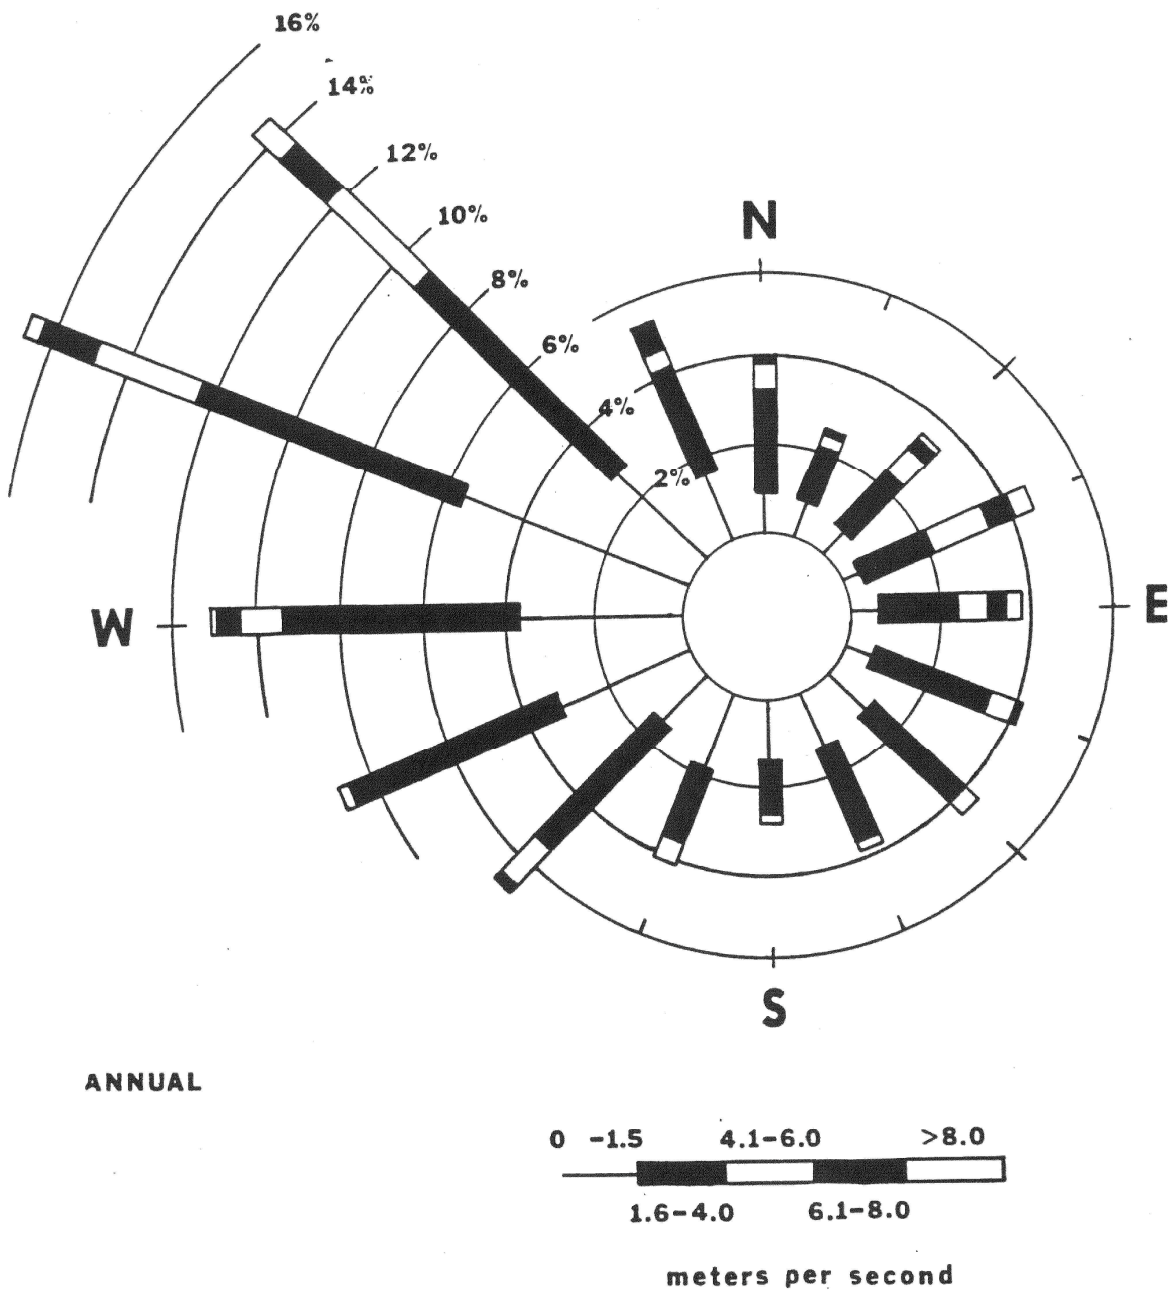

SEABROOK STATION
UPDATED FINAL SAFETY
ANALYSIS REPORT

Annual Wind Rose for the 30 ft. Level (November 1971 – October 1972)


Figure 2.3-6




SEABROOK STATION
UPDATED FINAL SAFETY
ANALYSIS REPORT

Topographic Map within a Five Mile Radius of the Seabrook
Site


Figure 2.3-7

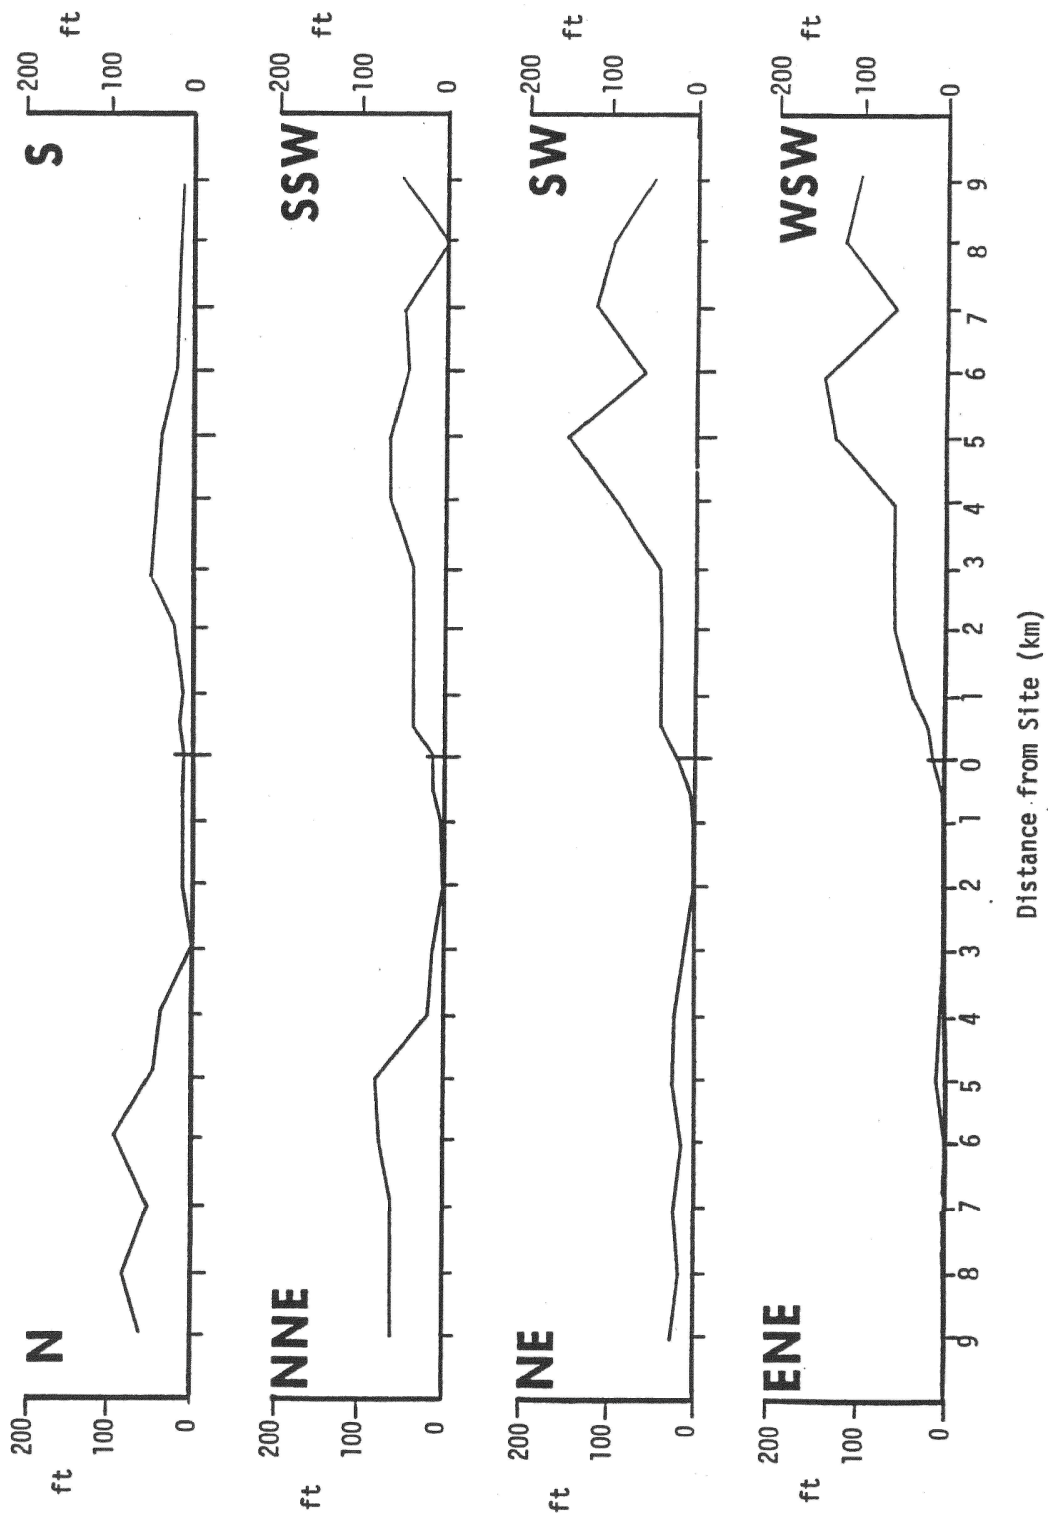

SEABROOK STATION UPDATED FINAL SAFETY ANALYSIS REPORT	Terrain Cross Section [2 Sheets]	
		Figure 2.3-8, Sh. 1 of 2

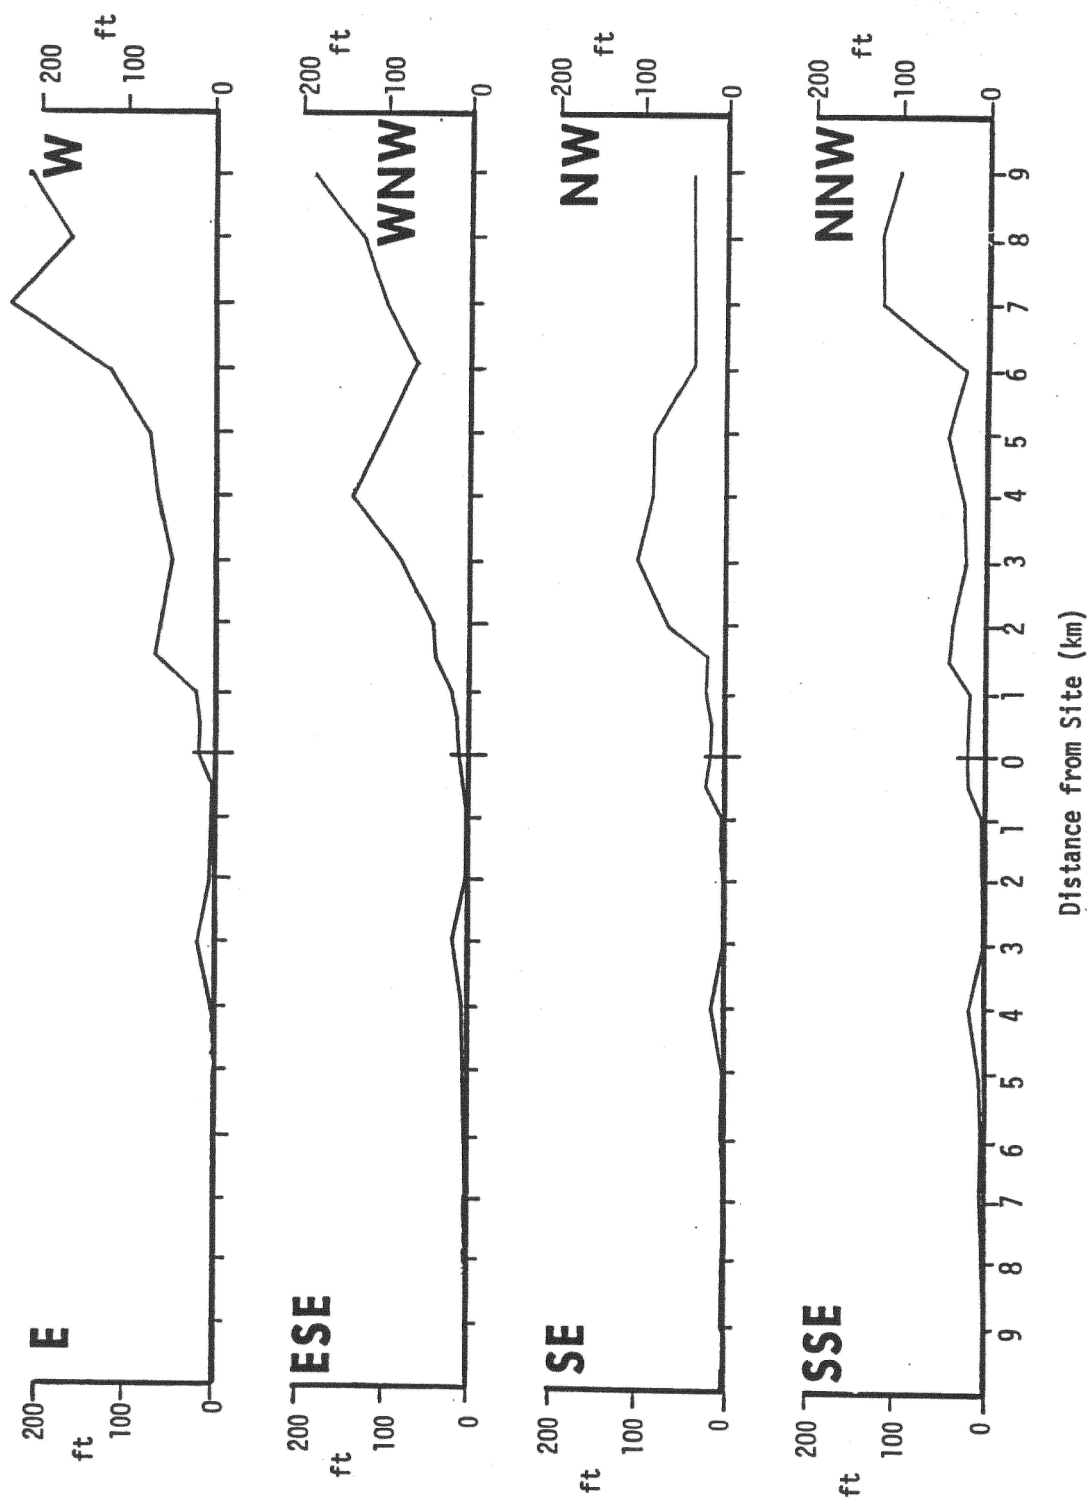


SEABROOK STATION UPDATED FINAL SAFETY ANALYSIS REPORT	Terrain Cross Section [2 Sheets]	
		Figure 2.3-8, Sh. 2 of 2

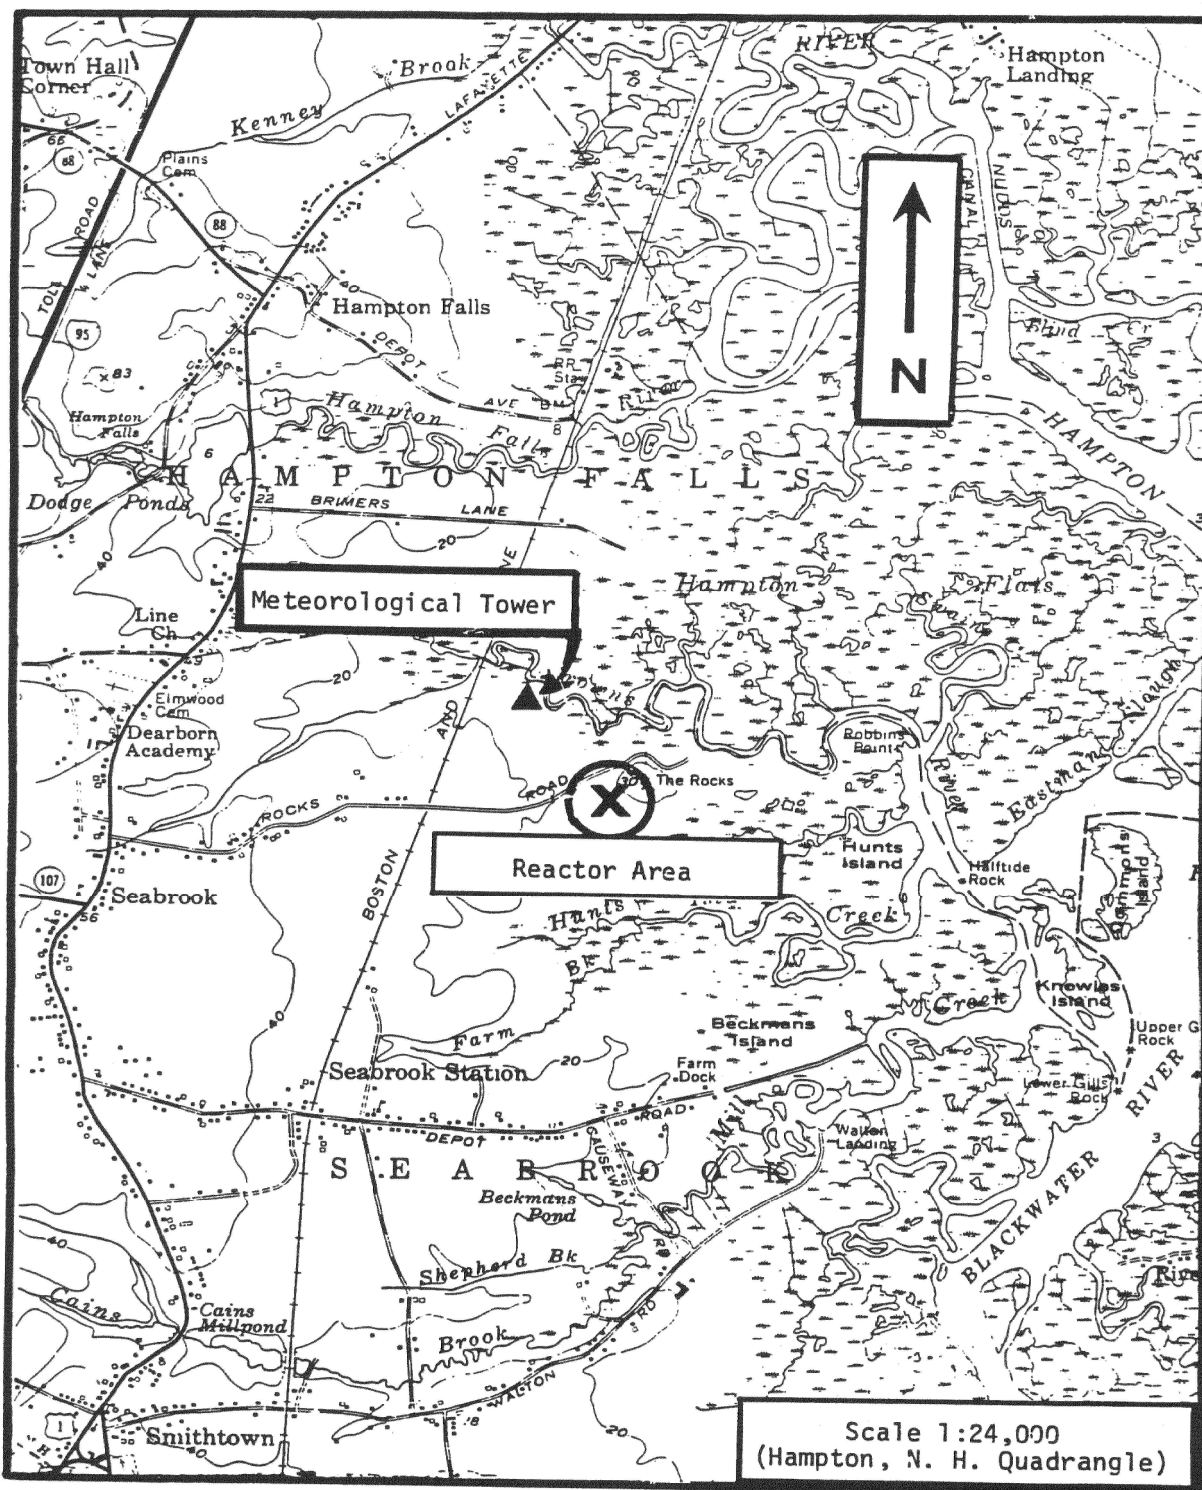

SEABROOK STATION
UPDATED FINAL SAFETY
ANALYSIS REPORT


Topographic Map Showing the Location of the
Meteorological Tower with Respect to the Reactor Area

Figure 2.3-9

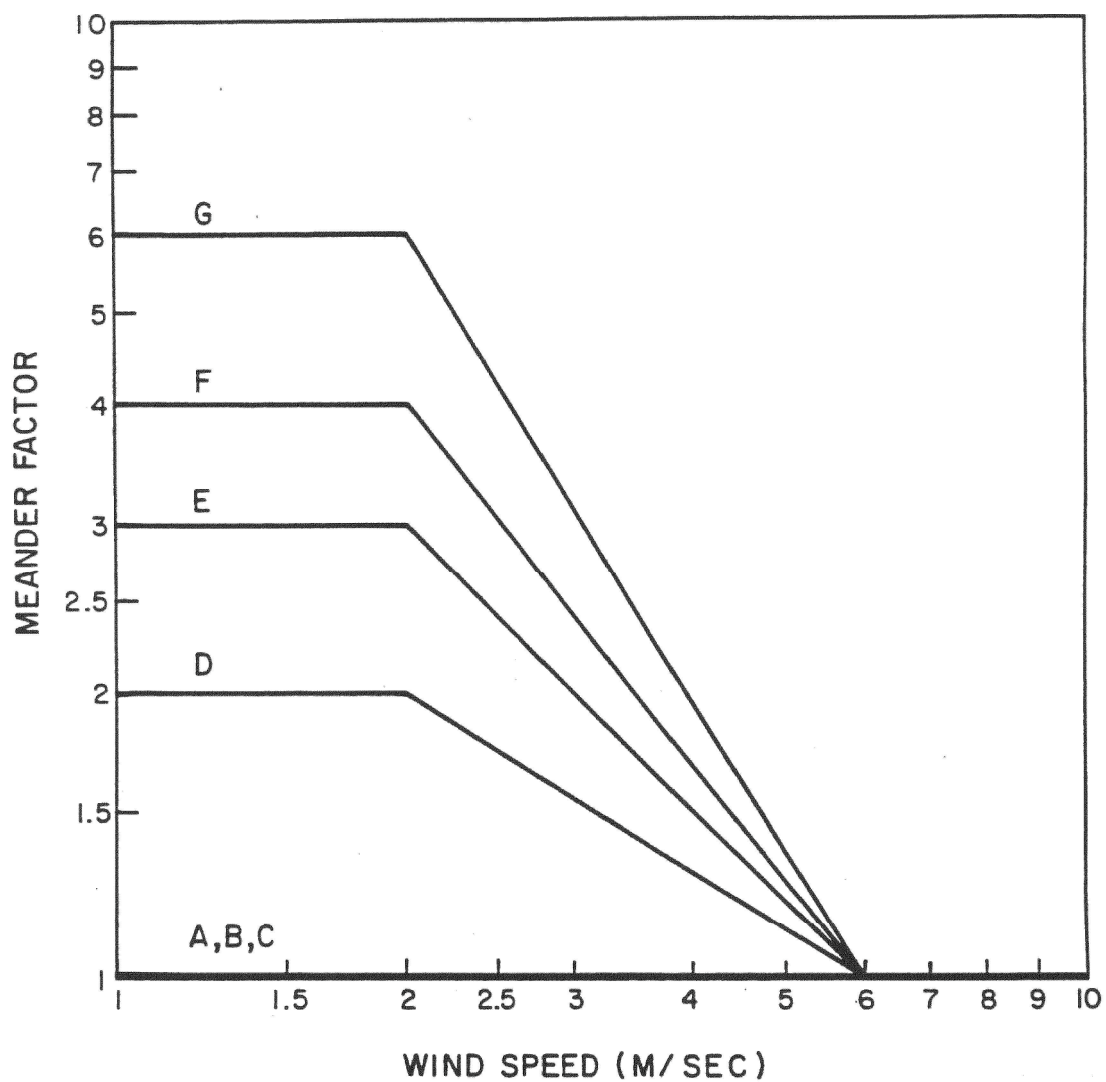

MEANDER FACTOR IS VALID UP TO 800 METERS FROM SOURCE.

SEABROOK STATION UPDATED FINAL SAFETY ANALYSIS REPORT	Meander as a Function of Wind Speed and Stability	
		Figure 2.3-10

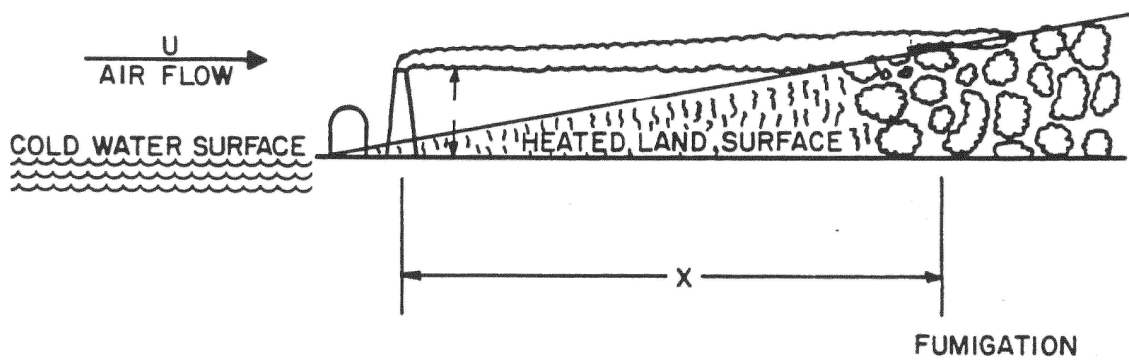

SEABROOK STATION UPDATED FINAL SAFETY ANALYSIS REPORT	Plume and TIBL Interaction	
		Figure 2.3-11