



Tennessee Valley Authority, Post Office Box 2000, Soddy-Daisy, Tennessee 37379

April 26, 1995

U.S. Nuclear Regulatory Commission
ATTN: Document Control Desk
Washington, D.C. 20555

Gentlemen:

In the Matter of
Tennessee Valley Authority

) Docket Nos. 50-327
) 50-328

**SEQUOYAH NUCLEAR PLANT (SQN) - 1994 ANNUAL RADIOACTIVE
EFFLUENT RELEASE REPORT (ARERR)**

Enclosed is the ARERR for the period of January 1 to December 31, 1994.
This report is being submitted in accordance with SQN Technical Specification
(TS) 6.9.1.8.

Enclosure 1 contains SQN's ARERR. Enclosure 2 provides the Radiological
Impact Assessment Report for the period of January 1 to December 31, 1994.
Enclosure 3 provides an entire copy of SQN's Offsite Dose Calculation Manual
(ODCM), which includes Revisions 32, 33, 34, and 35. These ODCM revisions
occurred during this 1994 reporting period and are being provided in
accordance with SQN TS 6.14.

Please direct questions concerning this issue to D. V. Goodin at
(615) 843-7734.

Sincerely,

R. H. Shell
Manager
SQN Site Licensing

Enclosures
cc: See page 2

IRAS
1/1

9505030181 941231
PDR ADOCK 05000327
R PDR

U.S. Nuclear Regulatory Commission

Page 2

April 26, 1995

cc (Enclosures):

Mr. D. E. LaBarge, Project Manager
Nuclear Regulatory Commission
One White Flint, North
11555 Rockville Pike
Rockville, Maryland 20852-2739

NRC Resident Inspector
Sequoyah Nuclear Plant
2600 Igou Ferry Road
Soddy-Daisy, Tennessee 37379-3624

Regional Administrator
U.S. Nuclear Regulatory Commission
Region II
101 Marietta Street, NW, Suite 2900
Atlanta, Georgia 30323-2711

ENCLOSURE 1

ANNUAL RADIOACTIVE EFFLUENT RELEASE REPORT
FOR THE PERIOD OF JANUARY 1 TO DECEMBER 31, 1994

(S58 950414 801)

EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT
SUPPLEMENTAL INFORMATION
1994

1. REGULATORY LIMITS

A. Gaseous Effluents

1. Dose rates due to radioactivity released in gaseous effluents from the site to areas at and beyond the unrestricted area boundary shall be limited to the following:
 - a. Noble gases:- Less than or equal to 500 mrem/year to the total body.
 - Less than or equal to 3000 mrem/year to the skin.
 - b. Iodine-131, iodine-133, tritium, and all radionuclides in particulate form with half-lives greater than 8 days:
 - Less than or equal to 1500 mrem/year to any organ.
2. Air dose due to noble gases released in gaseous effluents to areas at and beyond the unrestricted area boundary shall be limited to the following:
 - a. Less than or equal 5 mrad for gamma radiation and less than or equal to 10 mrad for beta radiation during any calendar quarter.
 - b. Less than or equal to 10 mrad for gamma radiation and less than or equal to 20 mrad for beta radiation during any calendar year.
3. Dose to a member of the public from iodine-131, iodine-133, tritium, and all radionuclides in particulate form with half-lives greater than eight days in gaseous effluents released to areas at and beyond the unrestricted area boundary shall be limited to the following:
 - a. Less than or equal to 7.5 mrem to any organ during any calendar quarter.
 - b. Less than or equal to 15 mrem to any organ during any calendar year.

B. Liquid Effluents

1. The annual average concentration of radioactivity released in liquid effluents to unrestricted areas shall be limited to the concentrations specified in Title 10 of the Code of Federal Regulations, Part 20 (Standards for Protection Against Radiation), Appendix B, Table 2, Column 2, for radionuclides other than dissolved or entrained noble gases. For dissolved or entrained noble gases, the concentration shall be limited to 2.0E-04 microcuries/milliliter ($\mu\text{Ci/ml}$) total activity.

EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT
SUPPLEMENTAL INFORMATION
1994

2. The dose or dose commitment to a member of the public from radioactivity in liquid effluents released to unrestricted areas shall be limited to:
 - a. Less than or equal to 1.5 mrem to the total body and less than or equal to 5 mrem to any organ during any calendar quarter.
 - b. Less than or equal to 3 mrem to the total body and less than or equal to 10 mrem to any organ during any calendar year.

2. EFFLUENT CONCENTRATION LIMITS

A. Liquids

- *1. The Effluent Concentration Limits (ECL) for liquids are those listed in 10 CFR 20, Appendix B, Table 2, Column 2. For dissolved and entrained gases the ECL of $2.0E-04$ $\mu\text{Ci/ml}$ is applied. This ECL is based on the Xe-135 concentration in air (submersion dose) converted to an equivalent concentration in water as discussed in the International Commission on Radiological Protection (ICRP), Publication 2.

B. Gaseous

- *1. The maximum permissible dose rates for gaseous releases are defined in plant Offsite Dose Calculation Manual (ODCM).
 - a. Noble gas dose rate at the unrestricted area boundary:
 - Less than or equal to 500 mrem/year to the total body,
 - Less than or equal to 3000 mrem/year to skin.
 - b. Iodine-131, iodine-133, tritium, and particulates with half-lives greater than eight days dose rate at the unrestricted area boundary:
 - Less than or equal to 1500 mrem/year to any organ.

3. AVERAGE ENERGY

Sequoyah's ODCM limits the dose equivalent rates due to the release of noble gases to less than or equal to 500 mrem/year to the total body and less than or equal to 3000 mrem/year to the skin. Therefore, the average beta and gamma energies (E) for gaseous effluents as described in Regulatory Guide 1.21, "Measuring, Evaluation, and Reporting Radioactivity in Solid Wastes and Releases of Radioactive Materials in Liquid and Gaseous Effluents from Light-Water-Cooled Nuclear Power Plants," are not applicable.

*These values are used as applicable limits for liquid and gaseous effluents.

EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT
SUPPLEMENTAL INFORMATION
1994

4. Measurements and Approximations of Total Radioactivity

NOTE: Every effort is made to ensure that effluent releases from Sequoyah are conducted such that all Offsite Dose Calculation Manual (ODCM) Lower Limit of Detection (LLD) values are met. Whenever an analysis does not identify a radioisotope, a "0.00E-01 Ci" is recorded for the release. This does not necessarily mean that no activity was released for that particular radionuclide, but that the concentration was below the ODCM and analysis LLD. Refer to Tables A and B for estimates of these typical LLD values.

a. Fission and Activation Gases

Airborne effluent gaseous activity is continuously monitored and recorded. Additional grab samples from the shield building, auxiliary building, service building, and condenser vacuum exhausts are taken and analyzed at least monthly to determine the quantity of noble gas activity released for the month based on the average vent flowrates recorded for the sample period. Also, noble gas samples are collected and evaluated for the shield and auxiliary buildings following startup, shutdown, or rated thermal power change exceeding 15 percent within one hour (sampling only required if dose equivalent I-131 concentration in the primary coolant or the noble gas activity monitor shows that the containment activity has increased more than a factor of 3).

The quantity of noble gases released through the shield and auxiliary building exhausts due to purging or venting of containment and releases of waste gas decay tanks are also determined.

The total noble gas activity released for the month is then determined by summing all of the activity released from each vent for all sampling periods.

b. Iodines and Particulates

Iodine and particulate activity is continuously sampled. Charcoal and particulate samples are taken from the shield and auxiliary building exhausts and analyzed at least weekly to determine the total activity released from the plant based on the average vent flowrates recorded for sampling period.

Also, particulate and charcoal samples are taken from the auxiliary and shield building exhausts once per 24 hours for 2 days following startup, shutdown, or a rated thermal power change exceeding 15 percent within one hour. The quantity of iodine and particulate released from each vent during each sampling period is then determined using the average vent flowrates recorded for the sampling period and activity concentration.

The total particulate and iodine activity released for the month is then determined by summing all of the activity released from the shield and auxiliary building exhausts for all sampling periods.

EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT
SUPPLEMENTAL INFORMATION
1994

4. Measurements and Approximation of Total Radioactivity (continued)

c. Liquid Effluents

Batch (Radwaste and during periods of primary to secondary leakage, condensate regenerants to cooling tower blowdown)

Total gamma isotopic activity concentrations are determined on each batch of liquid effluent prior to release. The total activity of a released batch is determined by summing each nuclide's concentration and multiplying by the total volume discharged. The total activity released during a month is then determined by summing the activity content of each batch discharged during the month.

Continuous Releases and Periodic Continuous Releases (Condensate regenerants, turbine building sump and steam generator blowdown)

Total gamma isotopic activity concentration is determined daily on a composite sample from the condensate system and turbine building sump and weekly for steam generator blowdown. The total activity of the continuous release is determined by summing each nuclide's concentration and multiplying by the total volume discharged. The total activity released during the month is then determined by summing the activity content of each daily and weekly composite for the month.

5. Batch

Value		Units
<u>1st</u>	<u>2nd</u>	
<u>Half</u>	<u>Half</u>	

a. Liquid (Radwaste only)

1. Number of releases	167	168	Each
2. Total time period of releases	25,267	22,823	Minutes
3. Maximum time period of release	323	180	Minutes
4. Average time period of releases	151	136	Minutes
5. Minimum time period for release	67	74	Minutes
6. Average dilution stream flow during release periods cubic feet/second (CFS)	64,287	37,792	CFS

b. Gaseous (Batches only, containment purges, and waste decay tanks)

1. Number of releases	3	8	Each
2. Total time period of releases	563	12,259	Minutes
3. Maximum time period for release	340	10,470	Minutes
4. Average time period for releases	188	1,532	Minutes
5. Minimum time period for release	28	20	Minutes

EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT
SUPPLEMENTAL INFORMATION
1994

6. Abnormal Releases	<u>Value</u>		<u>Units</u>
	<u>1st</u>	<u>2nd</u>	
	<u>Half</u>	<u>Half</u>	
a. Liquid			
Number of Releases	<u>0</u>	<u>0</u>	
Total Activity Released	<u>0.00E-01</u>	<u>0.00E-01</u>	Ci
b. Gaseous			
Number of Releases	<u>0</u>	<u>0</u>	
Total Activity Released	<u>0.00E-01</u>	<u>0.00E-01</u>	Ci

EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT
1994
LIQUID EFFLUENTS - SUMMATION OF ALL RELEASES

A. <u>Fission and Activation Products</u>	Unit	<u>1st</u> <u>Qtr</u>	<u>2nd</u> <u>Qtr</u>	<u>3rd</u> <u>Qtr</u>	<u>4th</u> <u>Qtr</u>	<u>%Error</u>
1. Total Released	Curies	1.93E-01	5.02E-01	8.28E-01	4.80E-01	+1.8E+01
2. Average Diluted Conc. During Period of All Identified Isotopes	µCi/ml	5.71E-07	9.59E-07	1.89E-06	1.46E-06	
3. Percent of Applicable Limit (ΣECL ₅₁)	%	1.11E+01	1.74E+01	2.60E+01	1.53E+01	

NOTE: Percent of applicable limit is based on identified isotope concentration after dilution, related to their appropriate ECL concentration and sum of all the isotope fractions compared to 1.0.

B. <u>Tritium</u>						
1. Total Released	Curies	8.64E+01	2.40E+02	1.21E+02	1.54E+02	+1.8E+01
2. Average Diluted Conc. During Period	µCi/ml	2.56E-04	4.59E-04	2.77E-04	4.69E-04	
3. Percent of Applicable Limit (1.0E-03 µCi/ml)	%	2.56E+01	4.59E+01	2.77E+01	4.69E+01	

C. <u>Dissolved and Entrained Gases</u>						
1. Total Released	Curies	8.31E-03	2.58E-02	7.64E-02	7.38E-03	+3.9E+01
2. Average Diluted Conc. During Period	µCi/ml	2.46E-08	4.95E-08	1.75E-07	2.25E-08	
3. Percent of Applicable Limit (2.0E-04 µCi/ml)	%	1.23E-02	2.47E-02	8.74E-02	1.13E-02	

D. <u>Gross Alpha Radioactivity</u>						
1. Total Released	Curies	0.00E-01	0.00E-01	0.00E-01	0.00E-01	+2.0E+01

E. <u>Volume of Waste Released</u>	Liters	4.14E+06	5.29E+06	5.09E+06	4.14E+06	+4.0E+00
------------------------------------	--------	----------	----------	----------	----------	----------

F. <u>Volume of Dilution Water for Period</u>	Liters	3.34E+08	5.18E+08	4.32E+08	3.24E+08	+1.1E+01
---	--------	----------	----------	----------	----------	----------

EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT
1994
LIQUID EFFLUENTS - TOTAL PLANT DISCHARGE

G. Nuclide Summary (Note: Refer to Table A for ODCM nuclides reported as 0.00E-01)

Required by ODCM/Others

Fission and Activation Products

Nuclide	Unit	<u>Continuous Mode</u>		<u>Batch Mode</u>	
		<u>Quarter</u>	<u>Quarter</u>	<u>Quarter</u>	<u>Quarter</u>
		<u>1st</u>	<u>2nd</u>	<u>1st</u>	<u>2nd</u>
1. Strontium-89	Ci	0.00E-01	0.00E-01	0.00E-01	0.00E-01
2. Strontium-90	Ci	0.00E-01	0.00E-01	0.00E-01	1.98E-04
3. Iron-55	Ci	0.00E-01	0.00E-01	6.17E-02	2.57E-01
4. Manganese-54	Ci	0.00E-01	0.00E-01	2.54E-03	8.86E-03
5. Cobalt-58	Ci	0.00E-01	0.00E-01	1.25E-02	3.29E-02
6. Iron-59	Ci	0.00E-01	0.00E-01	0.00E-01	0.00E-01
7. Cobalt-60	Ci	0.00E-01	0.00E-01	4.11E-02	1.04E-01
8. Zinc-65	Ci	0.00E-01	0.00E-01	8.15E-04	4.34E-03
9. Molybdenum-99	Ci	0.00E-01	0.00E-01	0.00E-01	8.23E-05
10. Iodine-131	Ci	0.00E-01	0.00E-01	1.26E-05	6.54E-03
11. Cesium-134	Ci	0.00E-01	0.00E-01	6.41E-03	1.51E-02
12. Cesium-137	Ci	0.00E-01	7.98E-06	1.26E-02	2.51E-02
13. Cerium-141	Ci	0.00E-01	1.07E-05	0.00E-01	0.00E-01
14. Cerium-144	Ci	0.00E-01	0.00E-01	1.53E-03	7.85E-04
15. Antimony-125	Ci	0.00E-01	0.00E-01	4.72E-02	3.68E-02
16. Cobalt-57	Ci	0.00E-01	0.00E-01	4.48E-04	1.73E-03
17. Chromium-51	Ci	0.00E-01	0.00E-01	1.88E-03	1.21E-03
18. Niobium-95	Ci	0.00E-01	0.00E-01	2.14E-03	6.90E-04

EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT
1994
LIQUID EFFLUENTS - TOTAL PLANT DISCHARGE
(CONTINUED)

Nuclide	Unit	<u>Continuous Mode</u>		<u>Batch Mode</u>	
		<u>Quarter</u>	<u>Quarter</u>	<u>Quarter</u>	<u>Quarter</u>
		<u>1st</u>	<u>2nd</u>	<u>1st</u>	<u>2nd</u>
19. Iodine-133	Ci	0.00E-01	0.00E-01	0.00E-01	1.25E-03
20. Zirconium-95	Ci	0.00E-01	0.00E-01	8.77E-04	9.03E-05
21. Technetium-99m	Ci	0.00E-01	0.00E-01	0.00E-01	8.23E-05
22. Strontium-92	Ci	0.00E-01	0.00E-01	2.11E-05	9.83E-05
23. Tellurium-132	Ci	0.00E-01	0.00E-01	2.06E-06	3.46E-06
24. Antimony-124	Ci	0.00E-01	0.00E-01	1.47E-04	1.16E-05
25. Lanthanum-140	Ci	0.00E-01	0.00E-01	0.00E-01	7.56E-05
26. Cesium-136	Ci	0.00E-01	0.00E-01	0.00E-01	1.48E-04
27. Sodium-24	Ci	0.00E-01	0.00E-01	5.07E-06	1.94E-03
28. Cesium-138	Ci	0.00E-01	0.00E-01	0.00E-01	1.09E-05
29. Niobium-97	Ci	0.00E-01	0.00E-01	1.09E-04	2.65E-04
30. Strontium-91	Ci	0.00E-01	0.00E-01	9.81E-06	1.20E-05
31. Bromine-82	Ci	0.00E-01	0.00E-01	0.00E-01	2.40E-04
32. Silver-110m	Ci	0.00E-01	0.00E-01	1.20E-03	2.04E-03
33. Tellurium-129m	Ci	0.00E-01	0.00E-01	0.00E-01	1.78E-04
34. Yttrium-91m	Ci	0.00E-01	0.00E-01	5.95E-06	0.00E-01
Total for Period	Ci	0.00E-01	1.87E-05	1.93E-01	5.02E-01

EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT
1994
LIQUID EFFLUENTS - TOTAL PLANT DISCHARGE
(CONTINUED)

G. Nuclide Summary (NOTE: Refer to Table A for ODCM nuclides reported as C.00E-01)

Required by ODCM/Others

Dissolved and Entrained Noble Gases

Nuclide	Unit	<u>Continuous Mode</u>		<u>Batch Mode</u>	
		<u>Quarter</u>	<u>Quarter</u>	<u>Quarter</u>	<u>Quarter</u>
		<u>1st</u>	<u>2nd</u>	<u>1st</u>	<u>2nd</u>
1. Krypton-87	Ci	0.00E-01	0.00E-01	0.00E-01	0.00E-01
2. Krypton-88	Ci	0.00E-01	0.00E-01	0.00E-01	0.00E-01
3. Xenon-133	Ci	0.00E-01	0.00E-01	8.31E-03	2.26E-02
4. Xenon-133m	Ci	0.00E-01	0.00E-01	0.00E-01	2.16E-04
5. Xenon-135	Ci	0.00E-01	0.00E-01	0.00E-01	2.97E-03
6. Xenon-138	Ci	0.00E-01	0.00E-01	0.00E-01	0.00E-01
7. Krypton-85m	Ci	0.00E-01	0.00E-01	0.00E-01	0.00E-01
8. Xenon-131m	Ci	0.00E-01	0.00E-01	0.00E-01	0.00E-01
9. Xenon-135m	Ci	0.00E-01	0.00E-01	0.00E-01	0.00E-01
10. Krypton-85	Ci	0.00E-01	0.00E-01	0.00E-01	0.00E-01
11. Argon-41	Ci	0.00E-01	0.00E-01	0.00E-01	0.00E-01
Total for Period	Ci	0.00E-01	0.00E-01	8.31E-03	2.58E-02

EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT
1994
LIQUID EFFLUENTS - TOTAL PLANT DISCHARGE

G. Nuclide Summary (Note: Refer to Table A for ODCM nuclides reported as 0.00E-01)

Required by ODCM/Others

Fission and Activation Products

Nuclide	Unit	<u>Continuous Mode</u>		<u>Batch Mode</u>	
		<u>Quarter</u>	<u>Quarter</u>	<u>Quarter</u>	<u>Quarter</u>
		<u>3rd</u>	<u>4th</u>	<u>3rd</u>	<u>4th</u>
1. Strontium-89	Ci	0.00E-01	0.00E-01	1.03E-03	0.00E-01
2. Strontium-90	Ci	0.00E-01	0.00E-01	2.55E-04	0.00E-01
3. Iron-55	Ci	0.00E-01	0.00E-01	1.47E-01	3.52E-02
4. Manganese-54	Ci	0.00E-01	0.00E-01	7.49E-03	5.76E-03
5. Cobalt-58	Ci	8.38E-07	4.90E-04	4.38E-01	2.82E-01
6. Iron-59	Ci	0.00E-01	0.00E-01	4.47E-03	9.94E-04
7. Cobalt-60	Ci	0.00E-01	3.65E-05	3.49E-02	4.30E-02
8. Zinc-65	Ci	0.00E-01	0.00E-01	5.61E-03	1.68E-03
9. Molybdenum-99	Ci	0.00E-01	0.00E-01	1.96E-03	4.21E-04
10. Iodine-131	Ci	0.00E-01	0.00E-01	2.12E-02	2.58E-03
11. Cesium-134	Ci	0.00E-01	2.18E-06	2.02E-02	4.21E-03
12. Cesium-137	Ci	3.94E-06	1.79E-05	2.68E-02	9.69E-03
13. Cerium-141	Ci	0.00E-01	0.00E-01	0.00E-01	0.00E-01
14. Cerium-144	Ci	0.00E-01	4.13E-05	6.35E-05	0.00E-01
15. Antimony-125	Ci	0.00E-01	0.00E-01	3.47E-02	3.42E-02
16. Cobalt-57	Ci	0.00E-01	0.00E-01	1.18E-03	1.35E-03
17. Chromium-51	Ci	0.00E-01	0.00E-01	4.26E-02	3.05E-02
18. Niobium-95	Ci	0.00E-01	0.00E-01	3.80E-03	6.67E-03

EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT
1994
LIQUID EFFLUENTS - TOTAL PLANT DISCHARGE
(CONTINUED)

Nuclide	Unit	Continuous Mode		Batch Mode	
		Quarter 3rd	Quarter 4th	Quarter 3rd	Quarter 4th
19. Iodine-133	Ci	0.00E-01	0.00E-01	5.96E-03	1.80E-03
20. Zirconium-95	Ci	0.00E-01	0.00E-01	1.96E-03	2.23E-03
21. Technetium-99m	Ci	0.00E-01	0.00E-01	1.62E-03	3.94E-04
22. Ruthenium-103	Ci	0.00E-01	0.00E-01	8.48E-05	5.73E-06
23. Antimony-124	Ci	0.00E-01	0.00E-01	1.39E-02	3.85E-03
24. Lanthanum-140	Ci	0.00E-01	0.00E-01	3.08E-04	4.14E-05
25. Barium-140	Ci	0.00E-01	0.00E-01	2.14E-05	0.00E-01
26. Sodium-24	Ci	0.00E-01	0.00E-01	7.82E-04	1.02E-04
27. Cesium-138	Ci	0.00E-01	0.00E-01	1.35E-04	4.50E-05
28. Strontium-92	Ci	0.00E-01	0.00E-01	2.77E-05	2.43E-04
29. Niobium-97	Ci	0.00E-01	0.00E-01	8.91E-05	6.70E-04
30. Yttrium-91	Ci	0.00E-01	0.00E-01	2.40E-03	0.00E-01
31. Silver-110m	Ci	0.00E-01	0.00E-01	1.62E-03	7.10E-03
32. Nickel-65	Ci	0.00E-01	0.00E-01	0.00E-01	1.63E-05
33. Barium-139	Ci	0.00E-01	0.00E-01	4.78E-05	0.00E-01
34. Bromine-82	Ci	0.00E-01	0.00E-01	2.79E-05	0.00E-01
35. Beryllium-7	Ci	0.00E-01	0.00E-01	1.10E-03	0.00E-01
36. Bromine-84	Ci	0.00E-01	0.00E-01	7.53E-05	0.00E-01
37. Cesium-136	Ci	0.00E-01	0.00E-01	1.09E-03	0.00E-01
38. Iodine-132	Ci	0.00E-01	0.00E-01	3.03E-04	0.00E-01
39. Iodine-135	Ci	0.00E-01	0.00E-01	5.47E-04	1.59E-04
40. Manganese-56	Ci	0.00E-01	0.00E-01	4.10E-05	0.00E-01
41. Tin-113	Ci	0.00E-01	0.00E-01	5.47E-04	4.69E-04
42. Tellurium-129m	Ci	0.00E-01	0.00E-01	3.68E-03	0.00E-01
43. Zinc-69m	Ci	0.00E-01	0.00E-01	4.37E-06	0.00E-01
44. Yttrium-93	Ci	0.00E-01	0.00E-01	0.00E-01	7.64E-05
Total for Period	Ci	4.78E-06	5.88E-04	8.28E-01	4.80E-01

EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT
1994
LIQUID EFFLUENTS - TOTAL PLANT DISCHARGE
(CONTINUED)

G. Nuclide Summary (NOTE: Refer to Table A for ODCM nuclides reported as 0.00E-01)

Required by ODCM/Others

Dissolved and Entrained Noble Gases

Nuclide	Unit	<u>Continuous Mode</u>		<u>Batch Mode</u>	
		<u>Quarter</u>	<u>Quarter</u>	<u>Quarter</u>	<u>Quarter</u>
		<u>3rd</u>	<u>4th</u>	<u>3rd</u>	<u>4th</u>
1. Krypton-87	Ci	0.00E-01	0.00E-01	0.00E-01	0.00E-01
2. Krypton-88	Ci	0.00E-01	0.00E-01	0.00E-01	2.32E-05
3. Xenon-133	Ci	0.00E-01	0.00E-01	7.29E-02	6.47E-03
4. Xenon-133m	Ci	0.00E-01	0.00E-01	3.26E-04	0.00E-01
5. Xenon-135	Ci	0.00E-01	0.00E-01	2.56E-03	3.48E-04
6. Xenon-138	Ci	0.00E-01	0.00E-01	0.00E-01	0.00E-01
7. Krypton-85m	Ci	0.00E-01	0.00E-01	0.00E-01	0.00E-01
8. Xenon-131m	Ci	0.00E-01	5.46E-04	5.92E-04	0.00E-01
9. Xenon-135m	Ci	0.00E-01	0.00E-01	2.19E-05	0.00E-01
10. Krypton-85	Ci	0.00E-01	0.00E-01	0.00E-01	0.00E-01
11. Argon-41	Ci	0.00E-01	0.00E-01	0.00E-01	0.00E-01
Total for Period	Ci	0.00E-01	5.46E-04	7.64E-02	6.84E-03

EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT

1994

TABLE A

LIQUID "TYPICAL LLD" EVALUATION (1)

Nuclide	ODCM LLD	$\Delta t^{(2)}$			
		15 min	30 min	1 hr	2 hr
Manganese-54	<u>5.0E-07</u>	<u>9.12E-09</u>	<u>9.12E-09</u>	<u>9.12E-09</u>	<u>9.12E-09</u>
Cobalt-58	<u>5.0E-07</u>	<u>8.21E-09</u>	<u>8.21E-09</u>	<u>8.21E-09</u>	<u>8.21E-09</u>
Iron-59	<u>5.0E-07</u>	<u>1.62E-08</u>	<u>1.62E-08</u>	<u>1.62E-08</u>	<u>1.62E-08</u>
Cobalt-60	<u>5.0E-07</u>	<u>1.08E-08</u>	<u>1.08E-08</u>	<u>1.08E-08</u>	<u>1.08E-08</u>
Zinc-65	<u>5.0E-07</u>	<u>2.14E-08</u>	<u>2.14E-08</u>	<u>2.14E-08</u>	<u>2.14E-08</u>
Molybdenum-99	<u>5.0E-07</u>	<u>5.24E-08</u>	<u>5.25E-08</u>	<u>5.28E-08</u>	<u>5.34E-08</u>
Cesium-134	<u>5.0E-07</u>	<u>9.82E-09</u>	<u>9.82E-09</u>	<u>9.82E-09</u>	<u>9.82E-09</u>
Cesium-137	<u>5.0E-07</u>	<u>9.31E-09</u>	<u>9.31E-09</u>	<u>9.31E-09</u>	<u>9.31E-09</u>
Cerium-141	<u>5.0E-07</u>	<u>1.06E-08</u>	<u>1.06E-08</u>	<u>1.07E-08</u>	<u>1.07E-08</u>
Cerium-144	<u>5.0E-06</u>	<u>4.03E-08</u>	<u>4.03E-08</u>	<u>4.03E-08</u>	<u>4.03E-08</u>
Iodine-131	<u>1.0E-06</u>	<u>7.28E-09</u>	<u>7.28E-09</u>	<u>7.30E-09</u>	<u>7.32E-09</u>
Krypton-87	<u>1.0E-05</u>	<u>1.62E-08</u>	<u>1.85E-08</u>	<u>2.43E-08</u>	<u>4.20E-08</u>
Krypton-88	<u>1.0E-05</u>	<u>2.13E-08</u>	<u>2.27E-08</u>	<u>2.56E-08</u>	<u>3.27E-08</u>
Xenon-133	<u>1.0E-05</u>	<u>2.03E-08</u>	<u>2.04E-08</u>	<u>2.04E-08</u>	<u>2.05E-08</u>
Xenon-133m	<u>1.0E-05</u>	<u>5.05E-08</u>	<u>5.07E-08</u>	<u>5.10E-08</u>	<u>5.17E-08</u>
Xenon-135	<u>1.0E-05</u>	<u>5.60E-09</u>	<u>5.70E-09</u>	<u>5.93E-09</u>	<u>6.40E-09</u>
Xenon-138	<u>1.0E-05</u>	<u>2.82E-08</u>	<u>5.87E-08</u>	<u>2.55E-07</u>	<u>4.79E-06</u>

EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT

1994

TABLE A

LIQUID "TYPICAL LLD" EVALUATION (1)

(Continued)

<u>Nuclide</u>	<u>ODCM LLD</u>	<u>Typical LLD</u>
Tritium	<u>1.0E-05</u>	<u>1.0E-06</u>
Gross Alpha	<u>1.0E-07</u>	<u>2.0E-08</u>
Strontium-89	<u>5.0E-08</u>	<u>2.0E-08</u>
Strontium-90	<u>5.0E-08</u>	<u>1.0E-08</u>
Iron-55	<u>1.0E-06</u>	<u>3.0E-07</u>

NOTES: (1) LLD values are in $\mu\text{Ci/ml}$. Sample analyses are performed to ensure that ODCM LLD limits are met. These are typical LLD values.

(2) Δt is the time between sample collection and counting time.

EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT
1994
 GASEOUS EFFLUENTS-SUMMATION OF ALL RELEASES
 (GROUND LEVEL RELEASES)

<u>Summation of All Releases</u>	<u>Unit</u>	<u>1st</u> <u>Qtr</u>	<u>2nd</u> <u>Qtr</u>	<u>3rd</u> <u>Qtr</u>	<u>4th</u> <u>Qtr</u>	<u>%Error</u>
A. <u>Noble Gases</u>						
1. Total Released	Ci	2.55E+00	1.01E+01	8.72E+01	1.36E+01	±1.1E+01
2. Average Release Rate of Period	µCi/sec	3.28E-01	1.27E+00	1.10E+01	1.71E+00	
3. Percent of Applicable Limit	%	9.25E-05	8.46E-04	3.66E-03	8.85E-04	
B. <u>Iodines</u>						
1. Total Iodine-131	Ci	0.00E-01	0.00E-01	8.47E-06	0.00E-01	±1.3E+01
2. Average Release Rate for Period	µCi/sec	0.00E-01	0.00E-01	1.08E-06	0.00E-01	
3. Percent of Applicable Limit (1.60E-01 µCi/sec)	%	0.00E-01	0.00E-01	6.73E-04	0.00E.01	
C. <u>Particulates</u>						
1. Particulates with half-lives >8 days	Ci	0.00E-01	0.00E-01	0.00E-01	0.00E-01	±1.6E+01
2. Average Release Rate for Period	µCi/sec	0.00E-01	0.00E-01	0.00E-01	0.00E-01	
3. Percent of Applicable Limit	%	0.00E-01	0.00E-01	0.00E-01	0.00E-01	
4. Gross Alpha Radio- activity	Ci	0.00E-01	0.00E-01	0.00E-01	0.00E-01	±2.1E+01
D. <u>Tritium</u>						
1. Total Release	Ci	2.11E+00	1.78E+00	5.36E+00	5.57E+00	±1.5E+01
2. Average Release Rate for Period	µCi/sec	2.71E-01	2.26E-01	6.74E-01	7.01E-01	
3. Percent of Applicable Limit (8.47E+04 µCi/sec)		3.20E-04	2.67E-04	7.96E-04	8.27E-04	

EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT
1994
GASEOUS EFFLUENTS-SUMMATION OF ALL RELEASES
(GROUND LEVEL RELEASES)

	Unit	<u>Continuous Mode</u>		<u>Batch Mode</u>	
		<u>Quarter</u>	<u>Quarter</u>	<u>Quarter</u>	<u>Quarter</u>
		<u>1st</u>	<u>2nd</u>	<u>1st</u>	<u>2nd</u>
1. <u>Noble Gases</u>					
Required by ODCM/Others					
1. Krypton-87	Ci	<u>0.00E-01</u>	<u>0.00E-01</u>	<u>0.00E-01</u>	<u>0.00E-01</u>
2. Krypton-88	Ci	<u>0.00E-01</u>	<u>3.45E-03</u>	<u>0.00E-01</u>	<u>1.95E-02</u>
3. Xenon-133	Ci	<u>2.23E-02</u>	<u>2.18E-02</u>	<u>2.31E+00</u>	<u>9.04E+00</u>
4. Xenon-133m	Ci	<u>0.00E-01</u>	<u>0.00E-01</u>	<u>3.93E-03</u>	<u>1.11E-01</u>
5. Xenon-135	Ci	<u>8.65E-03</u>	<u>1.21E-02</u>	<u>4.49E-02</u>	<u>6.56E-01</u>
6. Xenon-138	Ci	<u>0.00E-01</u>	<u>0.00E-01</u>	<u>0.00E-01</u>	<u>0.00E-01</u>
7. Krypton-85	Ci	<u>0.00E-01</u>	<u>0.00E-01</u>	<u>0.00E-01</u>	<u>0.00E-01</u>
8. Argon-41	Ci	<u>0.00E-01</u>	<u>1.44E-04</u>	<u>1.60E-01</u>	<u>2.47E-01</u>
9. Krypton-85m	Ci	<u>0.00E-01</u>	<u>2.93E-04</u>	<u>0.00E-01</u>	<u>3.39E-02</u>
10. Xenon-131m	Ci	<u>0.00E-01</u>	<u>0.00E-01</u>	<u>7.92E-04</u>	<u>2.51E-03</u>
11. Xenon-135m	Ci	<u>0.00E-01</u>	<u>7.48E-03</u>	<u>0.00E-01</u>	<u>0.00E-01</u>
Total for Period	Ci	<u>3.10E-02</u>	<u>4.53E-02</u>	<u>2.52E+00</u>	<u>1.01E+01</u>
2. <u>Iodines</u>					
1. Iodine-131	Ci	<u>0.00E-01</u>	<u>0.00E-01</u>		
2. Iodine-133	Ci	<u>0.00E-01</u>	<u>0.00E-01</u>		
3. Iodine-135	Ci	<u>0.00E-01</u>	<u>0.00E-01</u>		
Total for Period	Ci	<u>0.00E-01</u>	<u>0.00E-01</u>		

NOTE: Refer to Table B for ODCM nuclides reported as 0.00E-01.

EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT
1994
 GASEOUS EFFLUENTS-SUMMATION OF ALL RELEASES
 (GROUND LEVEL RELEASES)

3. Particulates

Required by ODCM/Others

Nuclide	Unit	Continuous Mode	
		<u>Quarter</u> <u>1st</u>	<u>Quarter</u> <u>2nd</u>
1. Strontium-89	Ci	<u>0.00E-01</u>	<u>0.00E-01</u>
2. Strontium-90	Ci	<u>0.00E-01</u>	<u>0.00E-01</u>
3. Iron-59	Ci	<u>0.00E-01</u>	<u>0.00E-01</u>
4. Cobalt-60	Ci	<u>0.00E-01</u>	<u>0.00E-01</u>
5. Zinc-65	Ci	<u>0.00E-01</u>	<u>0.00E-01</u>
6. Manganese-54	Ci	<u>0.00E-01</u>	<u>0.00E-01</u>
7. Cobalt-58	Ci	<u>0.00E-01</u>	<u>0.00E-01</u>
8. Molybdenum-99	Ci	<u>0.00E-01</u>	<u>0.00E-01</u>
9. Cesium-134	Ci	<u>0.00E-01</u>	<u>0.00E-01</u>
10. Cesium-137	Ci	<u>0.00E-01</u>	<u>0.00E-01</u>
11. Cerium-141	Ci	<u>0.00E-01</u>	<u>0.00E-01</u>
12. Cerium-144	Ci	<u>0.00E-01</u>	<u>0.00E-01</u>
Total for Period	Ci	<u>0.00E-01</u>	<u>0.00E-01</u>

NOTE: Refer to Table B for ODCM nuclides reported as 0.00E-01.

EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT
1994
GASEOUS EFFLUENTS-SUMMATION OF ALL RELEASES
(GROUND LEVEL RELEASES)

	Unit	Continuous Mode		Batch Mode	
		Quarter	Quarter	Quarter	Quarter
		3rd	4th	3rd	4th
1. <u>Noble Gases</u>					
Required by ODCM/Others					
1. Krypton-87	Ci	0.00E-01	0.00E-01	0.00E-01	0.00E-00
2. Krypton-88	Ci	1.33E-03	0.00E-01	9.17E-03	0.00E-01
3. Xenon-133	Ci	4.44E+00	1.18E-02	7.91E+01	1.21E+01
4. Xenon-133m	Ci	0.00E-01	0.00E-01	1.61E+00	3.67E-01
5. Xenon-135	Ci	8.51E-03	1.58E-02	1.42E+00	8.37E-01
6. Xenon-138	Ci	0.00E-01	0.00E-01	0.00E-01	0.00E-01
7. Krypton-85	Ci	0.00E-01	0.00E-01	4.18E-01	3.28E-02
8. Argon-41	Ci	0.00E-01	1.30E-02	6.51E-02	1.67E-01
9. Krypton-85m	Ci	1.85E-05	6.49E-04	2.98E-02	5.58E-02
10. Xenon-131m	Ci	0.00E-01	0.00E-01	7.25E-02	0.00E-01
11. Xenon-135m	Ci	2.79E-03	0.00E-01	0.00E-01	0.00E-01
Total for Period	Ci	4.45E+00	4.13E-02	8.27E+01	1.36E+01
2. <u>Iodines</u>					
1. Iodine-131	Ci	8.47E-06	0.00E-01		
2. Iodine-133	Ci	0.00E-01	0.00E-01		
3. Iodine-135	Ci	0.00E-01	0.00E-01		
Total for Period	Ci	8.47E-06	0.00E-01		

NOTE: Refer to Table B for ODCM nuclides reported as 0.00E-01.

EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT
1994
 GASEOUS EFFLUENTS-SUMMATION OF ALL RELEASES
 (GROUND LEVEL RELEASES)

3. Particulates

Required by ODCM/Others

Nuclide	Unit	<u>Continuous Mode</u>	
		<u>Quarter</u> <u>3rd</u>	<u>Quarter</u> <u>4th</u>
1. Strontium-89	Ci	0.00E-01	0.00E-01
2. Strontium-90	Ci	0.00E-01	0.00E-01
3. Iron-59	Ci	0.00E-01	0.00E-01
4. Cobalt-60	Ci	0.00E-01	0.00E-01
5. Zinc-65	Ci	0.00E-01	0.00E-01
6. Manganese-54	Ci	0.00E-01	0.00E-01
7. Cobalt-58	Ci	0.00E-01	0.00E-01
8. Molybdenum-99	Ci	0.00E-01	0.00E-01
9. Cesium-134	Ci	0.00E-01	0.00E-01
10. Cesium-137	Ci	0.00E-01	0.00E-01
11. Cerium-141	Ci	0.00E-01	0.00E-01
12. Cerium-144	Ci	0.00E-01	0.00E-01
Total for Period	Ci	0.00E-01	0.00E-01

NOTE: Refer to Table B for ODCM nuclides reported as 0.00E-01.

EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT

1994

TABLE B

GASEOUS "TYPICAL" LLD EVALUATION (1)

Noble Gas

<u>Nuclide</u>	<u>ODCM LLD</u>	<u>$\Delta t^{(2)}$</u>	
		<u>1 hr</u>	<u>1.5 hr</u>
Krypton-87	<u>1.0E-04</u>	<u>1.19E-06</u>	<u>2.69E-06</u>
Krypton-88	<u>1.0E-04</u>	<u>1.22E-06</u>	<u>1.76E-06</u>
Xenon-133	<u>1.0E-04</u>	<u>5.51E-07</u>	<u>5.56E-07</u>
Xenon-133m	<u>1.0E-04</u>	<u>1.99E-06</u>	<u>2.02E-06</u>
Xenon-135	<u>1.0E-04</u>	<u>2.59E-07</u>	<u>2.90E-07</u>
Xenon-138	<u>1.0E-04</u>	<u>5.38E-05</u>	<u>8.55E-05</u>

<u>Particulate Sample</u>		<u>2.02 da</u>	<u>2.79 da</u>	<u>5.79 da</u>
Manganese-54	<u>1.0E-10</u>	<u>1.83E-12</u>	<u>7.65E-14</u>	<u>1.10E-14</u>
Cobalt-58	<u>1.0E-10</u>	<u>1.60E-12</u>	<u>4.79E-14</u>	<u>9.99E-15</u>
Iron-59	<u>1.0E-10</u>	<u>3.21E-12</u>	<u>1.36E-13</u>	<u>2.03E-14</u>
Cobalt-60	<u>1.0E-10</u>	<u>1.79E-12</u>	<u>7.46E-14</u>	<u>1.07E-14</u>
Zinc-65	<u>1.0E-10</u>	<u>4.08E-12</u>	<u>1.71E-13</u>	<u>2.46E-14</u>
Molybdenum-99	<u>1.0E-10</u>	<u>2.08E-12</u>	<u>1.05E-13</u>	<u>3.18E-14</u>
Cesium-134	<u>1.0E-10</u>	<u>2.03E-12</u>	<u>8.45E-14</u>	<u>1.21E-14</u>
Cesium-137	<u>1.0E-10</u>	<u>1.85E-12</u>	<u>7.71E-14</u>	<u>1.10E-14</u>
Cerium-141	<u>1.0E-10</u>	<u>2.32E-12</u>	<u>9.82E-14</u>	<u>1.50E-14</u>
Cerium-144	<u>1.0E-10</u>	<u>1.03E-12</u>	<u>4.28E-13</u>	<u>6.16E-14</u>
Iodine-131	<u>1.0E-10</u>	<u>1.85E-12</u>	<u>8.22E-14</u>	<u>1.52E-14</u>

<u>Charcoal Sample</u>		<u>2.0 da</u>	<u>2.5 da</u>	<u>5.5 da</u>
Iodine-131	<u>1.0E-11</u>	<u>2.53E-12</u>	<u>1.10E-13</u>	<u>2.00E-14</u>

EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT

1994

TABLE B

GASEOUS "TYPICAL" LLD EVALUATION (1)

(continued)

<u>Nuclide</u>	<u>ODCM LLD</u>	<u>Typical LLD</u>
Tritium	1.0E-06	1.0E-11
Gross Alpha	1.0E-11	1.5E-14
Strontium-89	1.0E-11	1.0E-14
Strontium-90	1.0E-11	1.0E-15

NOTES: (1) LLD values are in $\mu\text{Ci/cc}$.

(2) Δt for noble gases is the time from sampling to analysis.
 Δt for charcoal and particulate samples is the midpoint of sampling to analysis.

EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT
1994
SOLID WASTE (RADIOACTIVE SHIPMENTS)

A. Solid Waste Shipped Offsite for Burial or Disposal (not Irradiated Fuel)

1. <u>Type of Waste</u>	<u>Unit</u>	<u>12 Month Period</u>	<u>Est. Tot. Error %</u>
a. Spent resins, filter sludges, evaporator bottoms, etc.	m ³ Ci	1.18E+01 2.93E+01	±1.00E-1 ±1.50E+1
b. Dry Active Waste, Compressible Waste Contaminated Equipment, etc.	m ³ Ci	4.61E+01 5.76E+00	±1.00E-1 ±1.50E+1
c. Irradiated Components, Control Rods, etc.	m ³ Ci	None None	N/A N/A
d. Other: Mechanical Filters Floor Drain Media	m ³ Ci	3.50E+00 6.20E+01	±1.00E-1 ±1.50E+1

2. Estimate of Major Nuclide Composition (by type of waste)

a. Spent resins, filter sludges, evaporator bottoms, etc. (nuclides determined by measurement)	<u>Curies</u>	<u>Percent</u>
1. Iron-55	1.54E+01	5.25E+01
2. Cobalt-58	4.11E-01	1.40E+00
3. Cobalt-60	5.22E+00	1.78E+01
4. Nickel-63	7.49E+00	2.55E+01
5. Cesium-137	5.28E-01	1.80E+00
b. Dry active waste, compressible waste, contaminated equipment, etc. (nuclides determined by estimate)		
1. Chromium-51	2.27E-01	3.94E+00
2. Manganese-54	6.75E-02	1.17E+00
3. Iron-55	2.00E+00	3.47E+01
4. Cobalt-58	1.15E+00	2.00E+01
5. Cobalt-60	4.62E-01	8.02E+00
6. Nickel-63	3.15E-01	5.46E+00
7. Niobium-95	9.90E-02	1.72E+00
8. Zirconium-95	6.32E-02	1.10E+00
9. Cesium-134	5.55E-01	9.63E+00
10. Cesium-137	7.21E-01	1.25E+01
c. Irradiated Components	N/A	N/A

EFFLUENT AND WASTE DISPOSAL ANNUAL REPORT
1994
SOLID WASTE (RADIOACTIVE SHIPMENTS)

2. Estimate of Major Nuclide Composition (by type of waste) Continued

d. Other: Mechanical Filters, Floor Drain Media
(nuclides determined by estimate)

	<u>Curies</u>	<u>Percent</u>
1. Manganese-54	9.33E-01	1.51E+00
2. Iron-55	2.56E+01	4.12E+01
3. Cobalt-58	9.82E+00	1.58E+01
4. Cobalt-60	9.92E+00	1.60E+01
5. Nickel-63	7.14E+00	1.15E+01
6. Chromium-51	3.96E+00	6.39E+00
7. Niobium-95	1.55E+00	2.50E+00
8. Zirconium-95	1.72E+00	2.77E+00
9. Ruthenium-106	9.74E-01	1.57E+00

3. Solid Waste Disposition

<u>Number of Shipments</u>	<u>Type</u>	<u>Quantity</u>	<u>Mode of Transportation</u>	<u>Destination</u>
----------------------------	-------------	-----------------	-------------------------------	--------------------

a) Spent resins, filter sludges, evaporator bottoms, etc.

1	B-LSA		Motor Freight	Barnwell, SC
2	A-LSA		Motor Freight	Barnwell, SC

<u>Number of Shipments</u>	<u>Type</u>	<u>Quantity</u>	<u>Mode of Transportation</u>	<u>Destination</u>
----------------------------	-------------	-----------------	-------------------------------	--------------------

b) Dry active waste, compressible waste, contaminated equipment, etc.

110	A-LSA		Motor Freight	Barnwell, SC
-----	-------	--	---------------	--------------

<u>Number of Shipments</u>	<u>Type</u>	<u>Quantity</u>	<u>Mode of Transportation</u>	<u>Destination</u>
----------------------------	-------------	-----------------	-------------------------------	--------------------

c) Irradiated components, control rods, etc.

None

<u>Number of Shipments</u>	<u>Type</u>	<u>Quantity</u>	<u>Mode of Transportation</u>	<u>Destination</u>
----------------------------	-------------	-----------------	-------------------------------	--------------------

d) Other: Mechanical Filters, Floor Drain Media

1	B-LSA		Motor Freight	Barnwell, SC
1	A-LSA		Motor Freight	Barnwell, SC

4. Irradiated Fuel Shipments (Disposition)

<u>Number of Shipments</u>	<u>Type</u>	<u>Quantity</u>	<u>Mode of Transportation</u>	<u>Destination</u>
----------------------------	-------------	-----------------	-------------------------------	--------------------

None	N/A		N/A	N/A
------	-----	--	-----	-----

5. Solidification of Waste

Was solidification performed? NO

If yes, solidification media: N/A

Effluent and Waste Disposal Annual Report
1994

Attachment 1.0

INOPERABLE INSTRUMENTATION

Pursuant to ODCM Section 1.1.2, the following information is provided concerning radioactive effluent monitoring instrumentation which was inoperable for greater than 30 consecutive days during the period of January 1, 1994, through December 31, 1994.

<u>Radiation Monitor Number</u>	<u>System Monitored</u>	<u>Date/Time Out of Service</u>	<u>Date/Time Returned to Service</u>	<u>Total Days</u>
1-RM-90-400	U-1 Shield Bldg	3/4/94 1400	4/11/94 1052	38

The Unit 1 Shield Building radiation monitor was considered inoperable for the timeframe noted above due to problems identified during calibration. The primary sample flow element located in the annulus had to be cleaned and retested. The flow element associated with containment purge also had to be removed for calibration.

Effluent and Waste Disposal Annual Report
1994

Attachment 2.0

Unmonitored Releases

In accordance with Regulatory Guide 1.21 and the ODCM Section 1.2.1.1 and 1.2.2.1, any unmonitored effluents should be clearly identified in the annual effluent report and the methods utilized in evaluating any radioactive effluents and/or offsite dose.

Turbine Building Sump

The ODCM requires daily sampling and weekly analysis of the Turbine Building Sump. In an effort to ensure accurate and timely analysis, samples are collected and analyzed on a daily basis. However during the review of the weekly surveillance package, it was determined that on 5/20/94 a sample was not collected and/or analyzed. As noted, samples are collected and analyzed daily and during 1994 no radioactivity was identified in the Turbine Building Sump; therefore, no radioactivity was calculated or reported for the 5/20/94 missed sample. Timers are now in place with alarm functions to remind analysts of required sampling.

Auxiliary Building Exhaust

On 4/7/94, the inspection port for Auxiliary Building 2A General Exhaust Fan was found off the duct and lying on the auxiliary building roof. This configuration permitted the partial release of auxiliary building exhaust air flow without being monitored by the auxiliary building monitor O-RM-90-101. The probable cause of the inspection port falling out was years of use with no maintenance program in place to inspect or repair them; they have now been added to the existing program for inspection and maintenance. A sample of the auxiliary building exhaust flow was collected and analyzed on 4/7/94, identifying only tritium at an organ dose rate of $1.12\text{E-}03$ mrem/yr (particulate, iodine and tritium limit 1500 mrem/yr). During 1994 only $8.47\text{E-}06$ Curies of I-131 was identified in all gaseous effluents from the auxiliary building exhaust; therefore, no additional release evaluations were performed.

ENCLOSURE 2

SEQUOYAH NUCLEAR PLANT

RADIOLOGICAL IMPACT ASSESSMENT REPORT

(S58 950414 801)

INTRODUCTION

Potential doses to maximum individuals and the population around Sequoyah are calculated for each quarter as required in Section 5.2 of the Offsite Dose Calculation Manual (ODCM). Measured plant releases for the reporting period are used to estimate these doses. Dispersion of radioactive effluents in the environment is estimated using meteorological data and riverflow data measured during the period. In this report, the doses resulting from releases are described and compared to limits established for Sequoyah.

DOSE LIMITS

The ODCM specifies limits for the release of radioactive effluents, as well as limits for doses to the general public from the release of radioactive effluents. These limits are set well below the Technical Specification limits which govern the concentrations of radioactivity and doses permissible in unrestricted areas. This ensures that radioactive effluent releases are As Low As Reasonably Achievable.

The limits for doses in unrestricted areas from airborne noble gases releases are:

Less than or equal to 5 mrad per quarter and
10 mrad per year (per reactor unit) for gamma radiation, and
Less than or equal to 10 mrad per quarter and
20 mrad per year (per reactor unit) for beta radiation.

The limit for the dose to a member of the general public in an unrestricted area from iodines and particulates released in airborne effluents is:

Less than or equal to 7.5 mrem per quarter and
15 mrem per year (per reactor unit) to any organ.

The limit for doses to a member of the general public from radioactive material in liquid effluents released to unrestricted areas, is:

Less than or equal to 1.5 mrem per quarter and
3 mrem per year (per reactor unit) to the total body, and
Less than or equal to 5 mrem per quarter and
10 mrem per year (per reactor unit) to any organ

The EPA limits for total dose to the public in the vicinity of a nuclear power plant, established in the Environmental Dose Standard of 40 CFR 190, are:

Less than or equal to 25 mrem per year to the total body,
Less than or equal to 75 mrem per year to the thyroid, and
Less than or equal to 25 mrem per year to any other organ.

DOSE CALCULATIONS

Estimated doses to the public are determined using computer models (the Gaseous Effluent Licensing Code, GELC, and the Quarterly Water Dose Assessment Code, QWATA). These models are based on guidance provided by the NRC (in Regulatory Guides 1.109, 1.111 and 1.113) for determining the potential dose to individuals and populations living in the vicinity of the plant. The area around the plant is analyzed to determine the pathways through which the public may receive a dose. The doses calculated are a representation of the dose to a "maximum exposed individual." Some of the factors used in these calculations (such as ingestion rates) are maximum values. Many of these factors are obtained from NUREG/CR-1004. The values chosen will tend to overestimate the dose to this "maximum" person. The expected dose to actual individuals is lower. The calculated doses are presented in Tables 1 through 9.

DOSES FROM AIRBORNE EFFLUENTS

For airborne effluents, the public can be exposed to radiation from several sources: direct radiation from the radioactivity in the air, direct radiation from radioactivity deposited on the ground, inhalation of airborne radioactivity, ingestion of vegetation which contains radioactivity deposited from the atmosphere, and ingestion of milk and beef which contains radioactivity deposited from the atmosphere onto vegetation and subsequently eaten by milk and beef animals.

Airborne Discharge Points

All releases from Sequoyah are considered ground-level releases. The ground-level Joint Frequency Distribution (JFD) is derived from windspeeds and directions measured 10 meters above ground and from the vertical temperature difference between 10 and 46 meters, and are presented for each quarter in Attachment 1.0

Meteorological Data

Meteorological variables at Sequoyah are measured continuously. Measurements collected include wind speed, wind direction, and temperature at heights of 10, 46, and 91 meters above the ground. Quarterly joint frequency distributions (JFDs) are calculated for each release point using the appropriate levels of meteorological data. A joint frequency distribution gives the percentage of the time in a quarter that the wind is blowing out of a particular upwind compass sector in a particular range of wind speeds for a given stability class A through G. The wind speeds are divided into nine wind speed ranges. Calms are distributed by direction in proportion to the distribution of noncalm wind directions less than 0.7 m/s (1.5 mph). Stability classes are determined from the vertical temperature difference between two measurement levels.

External Exposure Dose

Dose estimates for maximum external air dose (gamma-air and beta-air doses) are made for points at and beyond the unrestricted area boundary as described in the Sequoyah ODCM. The highest of these doses is then selected.

Submersion Dose

External doses to the skin and total body, due to submersion in a cloud of noble gases, are estimated for the nearest residence in each sector. The residence with the highest dose is then selected from all sectors.

Organ Dose

Doses to organs due to releases of airborne effluents are estimated for the inhalation, ground contamination, and ingestion pathways. The ingestion pathway is further divided into four possible contributing pathways: ingestion of cow/goat milk, ingestion of beef, and ingestion of vegetables. Doses from applicable pathways are calculated for each real receptor location identified in the most recent land use survey. To determine the maximum organ dose, the doses from the pathways are summed for each receptor. For the ingestion dose, however, only those pathways that exist for each receptor are considered in the sum, i.e., milk ingestion doses are included only for locations where milk is consumed without commercial preparation and vegetable ingestion is included only for those locations where a garden is identified. To conservatively account for beef ingestion, a beef ingestion dose equal to that for the highest unrestricted area boundary location is added to each identified receptor. For ground contamination, the dose added to the organ dose being calculated is the total body dose calculated for that location, i.e., it is assumed that the dose to an individual organ is equal to the total body dose.

Doses from airborne effluents are presented in Tables 1 through 4.

DOSES FROM LIQUID EFFLUENTS

For liquid effluents, the public can be exposed to radiation from three sources: the ingestion of water from the Tennessee River, the ingestion of fish caught in the Tennessee River, and direct exposure from radioactive material deposited on the river shoreline sediment (recreation).

The concentrations of radioactivity in the Tennessee River are estimated by a computer model which uses measured hydraulic data downstream of Sequoyah. Parameters used to determine the doses are based on guidance given by the NRC (in Regulatory Guides 1.109) for maximum ingestion rates, exposure times, etc. Wherever possible, parameters used in the dose calculation are site specific use factors determined by TVA. The models that are used to estimate doses, as well as the parameters input to the models, are described in detail in the Sequoyah Nuclear Plant ODCM.

Liquid Release Points and River Data

Radioactivity concentrations in the Tennessee River are calculated assuming that releases in liquid effluents are continuous. All routine liquid releases from Sequoyah, located at Tennessee River Mile 484, are made through diffusers which extend into the Tennessee River. It is assumed that releases to the river through these diffusers will initially be entrained in one-fifth of the water which flows past the plant. The QWATA code makes the assumption that this mixing condition holds true until the water is completely mixed at the first downstream dam, at Tennessee River Mile 471.0.

Doses are calculated for locations within a 50 mile radius downstream of the plant site. The maximum potential recreation dose is calculated for a location immediately downstream from the plant outfall. The maximum individual dose from ingestion of fish is assumed to be that calculated for the consumption of fish caught anywhere between the plant and the first downstream dam (Chickamauga Dam). The maximum individual dose from drinking water is assumed to be that calculated at the nearest downstream public water supply (E. I. DuPont). This could be interpreted as indicating that the maximum individual, as assumed for liquid releases from Sequoyah, is an individual who obtains all of his drinking water at E. I. DuPont, consumes fish caught from the Tennessee River between Sequoyah and Chickamauga Dam, and spends 500 hours per year on the shoreline just below the outfall from Sequoyah. Dose estimates for the maximum individual due to liquid effluents for each quarter in the period are presented in Tables 5 through 8, along with the average river flows past the plant site for the periods.

POPULATION DOSES

Population doses for highest exposed organ due to airborne effluents are calculated for an estimated 1,060,000 persons living within a 50-mile radius of the plant site. Doses from external pathways and inhalation are based on the 50-mile human population distribution. Ingestion population doses are calculated assuming that each individual consumes milk, vegetables,

and meat produced with the sector annulus in which he resides. Doses from external pathways and inhalation are based on the 50-mile human population distribution.

Population doses for total body and the maximum exposed organ due to liquid effluents are calculated for the entire downstream Tennessee River Population. Water ingestion population doses are calculated using actual population figures for downstream public water supplies. Fish ingestion population doses are calculated assuming that all sport fish caught in the Tennessee River are consumed by the Tennessee River population. Recreation population doses are calculated using actual recreational data on the number of shoreline visits at downstream locations.

Population dose estimates for airborne and liquid effluents are presented in Tables 1 through 8.

DIRECT RADIATION

External gamma radiation levels were measured by thermoluminescent dosimeters (TLDs) deployed around Sequoyah. The quarterly gamma radiation levels determined from these TLDs during this reporting period averaged approximately 14.7 mR/quarter at onsite stations and approximately 13.2 mR/quarter at offsite stations, or approximately 1.5 mR/quarter higher onsite than at offsite stations. This is consistent with levels reported at TVA's non operating nuclear power plant construction sites where the average radiation levels onsite are generally 2-6 mR/quarter higher than the levels offsite. This may be attributable to natural variations in environmental radiation levels, earth moving activities onsite, the mass of concrete employed in the construction of the plants, or other undetermined influences. Fluctuations in natural background dose rates and in TLD readings tend to mask any small increments which may be due to plant operations. Thus, there was no identifiable increase in dose rate levels attributable to direct radiation from plant equipment and/or gaseous effluents.

DOSE TO A MEMBER OF THE PUBLIC INSIDE THE UNRESTRICTED AREA BOUNDARY

As stated in the Sequoyah Offsite Dose Calculation Manual, an evaluation of the dose to a member of the public inside the unrestricted area boundary is performed for a hypothetical TVA employee who works just outside the restricted area fence for an entire workyear (2000 hours). Results from onsite TLD measurements for the calendar year in question indicate that the highest onsite TLD reading was 85.3 mrem. Using this value, and subtracting an annual background value of 55 mrem/year, and multiplying by the ratio of the occupancy times, the highest external dose to a member of the public inside the unrestricted area boundary is 6.9 mrem. The doses due to radioactive effluents released to the atmosphere calculated in this report would not add a significant amount to this measured dose. This dose is well below the 10 CFR 20 annual limit of 100 mrem.

TOTAL DOSE

To determine compliance with 40 CFR 190, annual total dose contributions to the maximum individual from Sequoyah radioactive effluents and all other nearby uranium fuel cycle sources are considered.

The annual dose to any organ other than thyroid for the maximum individual is conservatively estimated by summing the following doses: the total body air submersion dose for each quarter, the critical organ dose (for any organ other than the thyroid) from airborne effluents for each quarter from ground contamination, inhalation and ingestion, the total body dose from liquid effluents for each quarter, the maximum organ dose (for any organ other than the thyroid) from liquid effluents for each quarter, and any identifiable increase in direct radiation dose levels as measured by the environmental monitoring program. This dose is compared to the 40 CFR 190 limit for total body or any organ dose (other than thyroid) to determine compliance.

The annual thyroid dose to the maximum individual is conservatively estimated by summing the following doses: the total body air submersion dose for each quarter, the thyroid dose from airborne effluents for each quarter, the total body dose from liquid effluents for each quarter, the thyroid dose from liquid effluents for each quarter, and any identifiable increase in direct radiation dose levels as measured by the environmental monitoring program. This dose is compared to the 40 CFR 190 limit for thyroid dose to determine compliance.

Cumulative annual total doses are presented in Table 9.

Table 1
 Doses from Airborne Effluents
 First Quarter

Individual Doses

Pathway	Dose	Quarterly Limit	Percent of Limit	Location Sector/Distance
External				
Gamma Air	4.40E-04 mrad	5 mrad	0.009	SSW/1840
Beta Air	6.86E-04 mrad	10 mrad	0.007	
Submersion				
Total Body	3.12E-04 mrad	10 mrad	0.003	SSW/2134
Skin	5.91E-04 mrad	10 mrad	0.006	
Organ Doses				
Child/Thyroid	2.16E-03 mrem	7.5 mrem	0.29	SSW/2707
Child/Total Body	2.16E-03 mrem	7.5 mrem	0.29	

Population Doses

Total Body Dose 1.54E-02 man-rem

Maximum Organ Dose (organ) 1.54E-02 man-rem (thyroid)

Population doses can be compared to the natural background dose for the entire 50-mile population of about 95,400 man-rem/year (based on 90 mrem/yr for natural background).

Table 2
 Doses from Airborne Effluents
 Second Quarter

Individual Doses

Pathway	Dose	Quarterly Limit	Percent of Limit	Location Sector/Distance
External				
Gamma Air	1.64E-03 mrad	5 mrad	0.003	N/950
Beta Air	2.94E-03 mrad	10 mrad	0.029	
Submersion				
Total Body	1.02E-03 mrad	10 mrad	0.010	NNW/841
Skin	2.07E-03 mrad	10 mrad	0.020	
Organ Doses				
Child/Thyroid	3.03E-03 mrem	7.5 mrem	0.040	NNW/841
Child/Total Body	3.03E-03 mrem	7.5 mrem	0.040	

Population Doses

Total Body Dose 1.12E-02 man-rem

Maximum Organ Dose (organ) 1.12E-02 man-rem (thyroid)

Population doses can be compared to the natural background dose for the entire 50-mile population of about 95,400 man-rem/year (based on 90 mrem/yr for natural background).

Table 3
 Doses from Airborne Effluents
 Third Quarter

Individual Doses

Pathway	Dose	Quarterly Limit	Percent of Limit	Location Sector/Distance
External				
Gamma Air	9.24E-03 mrad	5 mrad	0.185	N/950
Beta Air	2.62E-02 mrad	10 mrad	0.262	
Submersion				
Total Body	5.03E-03 mrad	10 mrad	0.050	NNW/841
Skin	1.21E-02 mrad	10 mrad	0.121	
Organ Doses				
Child/Thyroid	1.15E-02 mrem	7.5 mrem	0.153	NNW/841
Child/Total Body	1.14E-02 mrem	7.5 mrem	0.153	

Population Doses

Total Body Dose 4.74E-02 man-rem

Maximum Organ Dose (organ) 4.78E-02 man-rem (thyroid)

Population doses can be compared to the natural background dose for the entire 50-mile population of about 95,400 man-rem/year (based on 90 mrem/yr for natural background).

Table 4
 Doses from Airborne Effluents
 Fourth Quarter

Individual Doses

Pathway	Dose	Quarterly Limit	Percent of Limit	Location Sector/Distance
External				
Gamma Air	2.28E-03 mrad	5 mrad	0.046	SSW/1840
Beta Air	5.07E-03 mrad	10 mrad	0.051	
Submersion				
Total Body	1.60E-03 mrad	10 mrad	0.016	SSW/2134
Skin	3.58E-03 mrad	10 mrad	0.036	
Organ Doses				
Child/Thyroid	8.07E-03 mrem	7.5 mrem	0.108	SSW/2707
Child/Total Body	8.07E-03 mrem	7.5 mrem	0.108	

Population Doses

Total Body Dose 5.09E-02 man-rem

Maximum Organ Dose (organ) 5.09E-02 man-rem (thyroid)

Population doses can be compared to the natural background dose for the entire 50-mile population of about 95,400 man-rem/year (based on 90 mrem/yr for natural background).

Table 5
 Doses from Liquid Effluents
 First Quarter

Individual Doses

Age Group	Organ	Dose	Quarterly Limit	Percent of Limit
Adult	Total Body	2.5E-03	1.5 mrem	< 1 %
	Liver	3.2E-03	5 mrem	< 1 %
Teen	Total Body	1.7E-03	1.5 mrem	< 1 %
	Liver	3.2E-03	5 mrem	< 1 %
Child	Total Body	1.2E-03	1.5 mrem	< 1 %
	Liver	3.0E-03	5 mrem	< 1 %

Average Riverflow past SQN (cubic feet per second): 74,840

Population Doses

Total Body Dose 3.1E-02 man-rem

Maximum Organ Dose (organ) 3.4E-02 man-rem (liver)

Population doses can be compared to the natural background dose for the entire 50-mile population of about 95,400 man-rem/year (based on 90 mrem/yr for natural background).

Table 6
 Doses from Liquid Effluents
 Second Quarter

Individual Doses

Age Group	Organ	Dose	Quarterly Limit	Percent of Limit
Adult	Total Body	7.7E-03	1.5 mrem	< 1 %
	Liver	9.7E-03	5 mrem	< 1 %
Teen	Total Body	5.3E-03	1.5 mrem	< 1 %
	Liver	9.8E-03	5 mrem	< 1 %
Child	Total Body	3.8E-03	1.5 mrem	< 1 %
	Liver	9.2E-03	5 mrem	< 1 %

Average Riverflow past SQN (cubic feet per second): 52,340

Population Doses

Total Body Dose 2.0E-01 man-rem

Maximum Organ Dose (organ) 2.1E-01 man-rem (liver)

Population doses can be compared to the natural background dose for the entire 50-mile population of about 95,400 man-rem/year (based on 90 mrem/yr for natural background).

Table 7
 Doses from Liquid Effluents
 Third Quarter

Individual Doses

Age Group	Organ	Dose	Quarterly Limit	Percent of Limit
Adult	Total Body	1.1E-02	1.5 mrem	< 1 %
	Liver	1.4E-02	5 mrem	< 1 %
Teen	Total Body	6.8E-03	1.5 mrem	< 1 %
	Liver	1.4E-02	5 mrem	< 1 %
Child	Total Body	4.0E-03	1.5 mrem	< 1 %
	Liver	1.3E-02	5 mrem	< 1 %

Average Riverflow past SQN (cubic feet per second): 38,313

Population Doses

Total Body Dose 1.9E-01 man-rem

Maximum Organ Dose (organ) 2.7E-01 man-rem (thyroid)

Population doses can be compared to the natural background dose for the entire 50-mile population of about 95,400 man-rem/year (based on 90 mrem/yr for natural background).

Table 8
 Doses from Liquid Effluents
 Fourth Quarter

Individual Doses

Age Group	Organ	Dose	Quarterly Limit	Percent of Limit
Adult	Total Body	4.3E-03	1.5 mrem	< 1 %
	GIT	6.7E-03	5 mrem	< 1 %
Teen	Total Body	3.1E-03	1.5 mrem	< 1 %
	Liver	5.3E-03	5 mrem	< 1 %
Child	Total Body	2.5E-03	1.5 mrem	< 1 %
	Liver	5.1E-03	5 mrem	< 1 %

Average Riverflow past SQN (cubic feet per second): 37,130

Population Doses

Total Body Dose 5.1E-02 man-rem

Maximum Organ Dose (organ) 6.6E-02 man-rem (GIT)

Population doses can be compared to the natural background dose for the entire 50-mile population of about 95,400 man-rem/year (based on 90 mrem/yr for natural background).

Table 9
 Total Dose from Fuel Cycle

Dose	First Quarter	Second Quarter	Third Quarter	Fourth Quarter	
Total Body or any Organ (except thyroid)					
Total body air submersion	3.12E-04	1.02E-03	5.03E-03	1.60E-03	
Critical organ dose (air)	2.16E-03	3.03E-03	1.15E-02	8.07E-03	
Total body dose (liquid)	2.5E-03	7.7E-03	1.1E-02	4.3E-03	
Maximum organ dose (liquid)	3.2E-03	9.8E-03	1.4E-02	6.7E-03	
Direct Radiation Dose	0.0E-00	0.0E-00	0.0E-00	0.00E-00	
Total	8.2E-03	2.2E-02	4.2E-02	2.1E-02	
Cumulative Total Dose (Total body or any other organ) mrem					9.3E-02
Annual Dose Limit (mrem)					2.50E+01
Percent of Limit					< 1 %
Thyroid Dose (mrem)					
Total body air submersion	3.12E-04	1.02E-03	5.03E-03	1.60E-03	
Thyroid dose (airborne)	2.16E-03	3.03E-03	1.15E-02	8.07E-03	
Total body dose (liquid)	2.5E-03	7.7E-03	1.1E-02	4.3E-03	
Thyroid dose (liquid)	7.8E-04	3.2E-03	4.8E-03	2.2E-03	
Direct Radiation Dose	0.0E-00	0.0E-00	0.0E-00	0.0E-00	
Total	5.8E-03	1.5E-02	3.2E-02	1.6E-02	
Cumulative Total Dose (Thyroid) mrem					6.9E-02
Annual Dose Limit (mrem)					7.50E+01
Percent of Limit					< 1 %

Attachment 1.0

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS A (DELTA T \leq -1.9 C/100 M)

SEQUOYAH NUCLEAR PLANT

JAN 1, 94 - MAR 31, 94

WIND DIRECTION	WIND SPEED(MPH)									TOTAL
	CALM	0.6-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4	\geq 24.5	
N	0.000	0.000	0.000	0.000	0.000	0.445	0.000	0.000	0.000	0.445
NNE	0.000	0.000	0.000	0.000	0.593	0.791	0.000	0.000	0.000	1.384
NE	0.000	0.000	0.000	0.049	0.099	0.099	0.000	0.000	0.000	0.247
ENE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
E	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
ESE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
SE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
SSE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
S	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
SSW	0.000	0.000	0.000	0.049	0.099	0.247	0.000	0.000	0.000	0.395
SW	0.000	0.000	0.000	0.000	0.148	0.148	0.000	0.000	0.000	0.297
WSW	0.000	0.000	0.000	0.000	0.049	0.049	0.000	0.000	0.000	0.099
W	0.000	0.000	0.000	0.000	0.049	0.049	0.000	0.000	0.000	0.099
WNW	0.000	0.000	0.000	0.000	0.000	0.099	0.000	0.000	0.000	0.099
NW	0.000	0.000	0.000	0.000	0.049	0.247	0.000	0.000	0.000	0.297
NNW	0.000	0.000	0.000	0.000	0.049	0.395	0.000	0.000	0.000	0.445
SUBTOTAL	0.000	0.000	0.000	0.099	1.137	2.570	0.000	0.000	0.000	3.806

TOTAL HOURS OF VALID STABILITY OBSERVATIONS	2143
TOTAL HOURS OF STABILITY CLASS A	79
TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS A	77
TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS	2023
TOTAL HOURS CALM	0

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

DATE PRINTED: 25-APR-94

MEAN WIND SPEED = 8.34

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS B (-1.9< DELTA T<=-1.7 C/100 M)

SEQUOYAH NUCLEAR PLANT

JAN 1, 94 - MAR 31, 94

WIND DIRECTION	CALM	WIND SPEED(MPH)								TOTAL
		0.6-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4	>24.5	
N	0.000	0.000	0.000	0.000	0.198	0.049	0.000	0.000	0.000	0.247
NNE	0.000	0.000	0.000	0.395	0.445	0.148	0.000	0.000	0.000	0.989
NE	0.000	0.000	0.000	0.099	0.049	0.000	0.000	0.000	0.000	0.148
ENE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
E	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
ESE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
SE	0.000	0.000	0.049	0.000	0.000	0.000	0.000	0.000	0.000	0.049
SSE	0.000	0.000	0.000	0.000	0.049	0.000	0.000	0.000	0.000	0.049
S	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
SSW	0.000	0.000	0.049	0.000	0.049	0.148	0.000	0.000	0.000	0.247
SW	0.000	0.000	0.000	0.000	0.099	0.000	0.000	0.000	0.000	0.099
WSW	0.000	0.000	0.049	0.049	0.049	0.000	0.000	0.000	0.000	0.099
W	0.000	0.000	0.000	0.000	0.049	0.000	0.000	0.000	0.000	0.049
WNW	0.000	0.000	0.000	0.000	0.099	0.049	0.000	0.000	0.000	0.148
NW	0.000	0.000	0.000	0.000	0.000	0.049	0.000	0.000	0.000	0.049
NNW	0.000	0.000	0.000	0.000	0.099	0.099	0.000	0.000	0.000	0.198
SUBTOTAL	0.000	0.000	0.049	0.593	1.137	0.593	0.000	0.000	0.000	2.373

TOTAL HOURS OF VALID STABILITY OBSERVATIONS 2143
 TOTAL HOURS OF STABILITY CLASS B 53
 TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS B 48
 TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS 2023
 TOTAL HOURS CALM 0

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
 STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
 WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

MEAN WIND SPEED = 6.41

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

DATE PRINTED: 25-APR-94

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS C (-1.7< DELTA T<=-1.5 C/100 M)

SEQUOYAH NUCLEAR PLANT

JAN 1, 94 - MAR 31, 94

WIND DIRECTION	CALM	0.6-1.4	1.5-3.4	WIND SPEED(MPH)						
				3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4	>=24.5	TOTAL
N	0.000	0.000	0.049	0.049	0.297	0.247	0.000	0.000	0.000	0.643
NNE	0.000	0.000	0.049	0.247	0.544	0.099	0.000	0.000	0.000	0.939
NE	0.000	0.000	0.099	0.049	0.148	0.049	0.000	0.000	0.000	0.346
ENE	0.000	0.000	0.049	0.000	0.000	0.000	0.000	0.000	0.000	0.049
E	0.000	0.000	0.049	0.000	0.000	0.000	0.000	0.000	0.000	0.049
ESE	0.000	0.000	0.049	0.000	0.000	0.000	0.000	0.000	0.000	0.049
SE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
SSE	0.000	0.000	0.000	0.000	0.049	0.049	0.000	0.000	0.000	0.099
S	0.000	0.000	0.000	0.000	0.049	0.099	0.000	0.000	0.000	0.148
SSW	0.000	0.000	0.000	0.099	0.049	0.049	0.000	0.000	0.000	0.198
SW	0.000	0.000	0.000	0.148	0.000	0.049	0.000	0.000	0.000	0.198
WSW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
W	0.000	0.000	0.049	0.049	0.099	0.049	0.000	0.000	0.000	0.247
WNW	0.000	0.000	0.000	0.099	0.000	0.148	0.000	0.000	0.000	0.247
NW	0.000	0.000	0.000	0.049	0.198	0.148	0.000	0.000	0.000	0.395
NNW	0.000	0.000	0.000	0.000	0.247	0.148	0.000	0.000	0.000	0.395
SUBTOTAL	0.000	0.000	0.395	0.791	1.681	1.137	0.000	0.000	0.000	4.004

TOTAL HOURS OF VALID STABILITY OBSERVATIONS	2143
TOTAL HOURS OF STABILITY CLASS C	82
TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS C	81
TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS	2023
TOTAL HOURS CALM	0

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
 STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
 WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

DATE PRINTED: 25-APR-94

MEAN WIND SPEED = 6.50

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS D (-1.5< DELTA T<=-0.5 C/100 M)

SEQUOYAH NUCLEAR PLANT

JAN 1, 94 - MAR 31, 94

WIND DIRECTION	CALM	0.6-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4	>=24.5	TOTAL
N	0.017	0.148	0.890	1.384	1.780	1.038	0.000	0.000	0.000	5.256
NNE	0.027	0.198	1.483	2.274	2.224	1.186	0.000	0.000	0.000	7.392
NE	0.017	0.000	1.087	0.692	0.000	0.049	0.000	0.000	0.000	1.846
ENE	0.009	0.148	0.395	0.049	0.000	0.000	0.000	0.000	0.000	0.602
E	0.004	0.049	0.198	0.000	0.000	0.000	0.000	0.000	0.000	0.251
ESE	0.006	0.049	0.346	0.000	0.049	0.000	0.000	0.000	0.000	0.451
SE	0.002	0.000	0.099	0.049	0.000	0.000	0.000	0.000	0.000	0.150
SSE	0.002	0.099	0.049	0.049	0.148	0.000	0.000	0.000	0.000	0.348
S	0.015	0.049	0.890	0.445	0.593	0.593	0.000	0.000	0.000	2.586
SSW	0.010	0.049	0.544	1.631	1.236	0.741	0.000	0.000	0.000	4.211
SW	0.013	0.049	0.791	1.137	0.939	0.445	0.000	0.000	0.000	3.375
WSW	0.008	0.049	0.445	0.049	0.198	0.000	0.000	0.000	0.000	0.749
W	0.002	0.000	0.099	0.198	0.247	0.099	0.000	0.000	0.000	0.644
WNW	0.002	0.000	0.148	0.395	0.297	0.346	0.049	0.000	0.000	1.238
NW	0.004	0.049	0.198	1.434	1.038	0.395	0.000	0.000	0.000	3.118
NNW	0.010	0.000	0.643	1.236	1.137	1.285	0.000	0.000	0.000	4.311
SUBTOTAL	0.148	0.939	8.304	11.023	9.886	6.179	0.049	0.000	0.000	36.530

TOTAL HOURS OF VALID STABILITY OBSERVATIONS	2143
TOTAL HOURS OF STABILITY CLASS D	818
TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS D	739
TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS	2023
TOTAL HOURS CALM	3

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
 STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
 WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

DATE PRINTED: 25-APR-94

MEAN WIND SPEED = 9.23

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS E (-0.5< DELTA T<= 1.5 C/100 M)

SEQUOYAH NUCLEAR PLANT

JAN 1, 94 - MAR 31, 94

WIND DIRECTION	WIND SPEED(MPH)									TOTAL
	CALM	0.6-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4	>=24.5	
N	0.164	0.494	2.867	1.335	0.544	0.099	0.000	0.000	0.000	5.502
NNE	0.226	0.494	4.152	1.483	0.247	0.049	0.000	0.000	0.000	6.652
NE	0.034	0.346	0.346	0.049	0.000	0.000	0.000	0.000	0.000	0.775
ENE	0.007	0.000	0.148	0.000	0.000	0.000	0.000	0.000	0.000	0.156
E	0.002	0.000	0.049	0.000	0.000	0.000	0.000	0.000	0.000	0.052
ESE	0.005	0.049	0.049	0.000	0.000	0.000	0.000	0.000	0.000	0.104
SE	0.002	0.049	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.052
SSE	0.010	0.000	0.198	0.099	0.099	0.049	0.000	0.000	0.000	0.455
S	0.043	0.148	0.741	0.544	0.395	0.395	0.049	0.000	0.000	2.317
SSW	0.144	0.643	2.323	1.384	0.939	1.087	0.000	0.000	0.000	6.521
SW	0.089	0.445	1.384	0.989	0.346	0.247	0.000	0.000	0.000	3.500
WSW	0.029	0.148	0.445	0.346	0.099	0.000	0.000	0.000	0.000	1.067
W	0.022	0.148	0.297	0.049	0.099	0.049	0.000	0.000	0.000	0.664
WNW	0.005	0.000	0.099	0.297	0.148	0.049	0.000	0.000	0.000	0.598
NW	0.048	0.297	0.692	0.544	0.148	0.198	0.000	0.000	0.000	1.926
NNW	0.060	0.297	0.939	0.989	0.445	0.198	0.000	0.000	0.000	2.927
SUBTOTAL	0.890	3.559	14.731	8.107	3.510	2.422	0.049	0.000	0.000	33.267

TOTAL HOURS OF VALID STABILITY OBSERVATIONS
 TOTAL HOURS OF STABILITY CLASS E
 TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS E
 TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS
 TOTAL HOURS CALM

2143
 692
 673
 2023
 18

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
 STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
 WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

DATE PRINTED: 25-APR-94

MEAN WIND SPEED = 3.61

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS F (1.5< DELTA T<= 4.0 C/100 M)

SEQUOYAH NUCLEAR PLANT

JAN 1, 94 - MAR 31, 94

WIND DIRECTION	WIND SPEED(MPH)									TOTAL
	CALM	0.6-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4	>=24.5	
N	0.089	0.198	1.137	0.049	0.000	0.000	0.000	0.000	0.000	1.473
NNE	0.211	0.741	2.422	0.099	0.049	0.000	0.000	0.000	0.000	3.523
NE	0.066	0.445	0.544	0.000	0.000	0.000	0.000	0.000	0.000	1.055
ENE	0.007	0.099	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.105
E	0.003	0.000	0.049	0.000	0.000	0.000	0.000	0.000	0.000	0.053
ESE	0.003	0.049	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.053
SE	0.007	0.000	0.099	0.000	0.000	0.000	0.000	0.000	0.000	0.105
SSE	0.013	0.148	0.049	0.000	0.000	0.000	0.000	0.000	0.000	0.211
S	0.059	0.148	0.741	0.148	0.000	0.000	0.000	0.000	0.000	1.097
SSW	0.072	0.247	0.840	0.247	0.494	0.049	0.000	0.000	0.000	1.951
SW	0.069	0.247	0.791	0.247	0.000	0.000	0.000	0.000	0.000	1.354
WSW	0.010	0.000	0.148	0.000	0.000	0.000	0.000	0.000	0.000	0.158
W	0.000	0.000	0.000	0.049	0.000	0.000	0.000	0.000	0.000	0.049
WNW	0.003	0.000	0.049	0.049	0.000	0.000	0.000	0.000	0.000	0.102
NW	0.010	0.049	0.099	0.099	0.000	0.000	0.000	0.000	0.000	0.257
NNW	0.020	0.049	0.247	0.198	0.000	0.000	0.000	0.000	0.000	0.514
SUBTOTAL	0.643	2.422	7.217	1.186	0.544	9.049	0.000	0.000	0.000	12.061

TOTAL HOURS OF VALID STABILITY OBSERVATIONS	2143
TOTAL HOURS OF STABILITY CLASS F	252
TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS F	244
TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS	2023
TOTAL HOURS CALM	13

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
 STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
 WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

DATE PRINTED: 25-APR-94

MEAN WIND SPEED = 2.39

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS G (DELTA T > 4.0 C/100 M)

SEQUOYAH NUCLEAR PLANT

JAN 1, 94 - MAR 31, 94

WIND DIRECTION	CALM	0.6-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4	>=24.5	TOTAL
N	0.030	0.000	0.247	0.000	0.000	0.000	0.000	0.000	0.000	0.277
NNE	0.242	0.346	1.681	0.399	0.000	0.000	0.000	0.000	0.000	2.368
NE	0.112	0.297	0.643	0.000	0.000	0.000	0.000	0.000	0.000	1.051
ENE	0.053	0.198	0.247	0.000	0.000	0.000	0.000	0.000	0.000	0.498
E	0.006	0.000	0.049	0.000	0.000	0.000	0.000	0.000	0.000	0.055
ESE	0.024	0.099	0.099	0.000	0.000	0.000	0.000	0.000	0.000	0.221
SE	0.012	0.099	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.111
SSE	0.030	0.148	0.099	0.000	0.000	0.000	0.000	0.000	0.000	0.277
S	0.053	0.148	0.297	0.000	0.000	0.000	0.000	0.000	0.000	0.498
SSW	0.130	0.198	0.890	0.099	0.000	0.000	0.000	0.000	0.000	1.316
SW	0.083	0.049	0.643	0.346	0.000	0.000	0.000	0.000	0.000	1.121
WSW	0.006	0.049	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.055
W	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
WNW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
NW	0.006	0.049	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.055
NNW	0.006	0.000	0.049	0.000	0.000	0.000	0.000	0.000	0.000	0.055
SUBTOTAL	0.791	1.681	4.943	0.544	0.000	0.000	0.000	0.000	0.000	7.958

TOTAL HOURS OF VALID STABILITY OBSERVATIONS

TOTAL HOURS OF STABILITY CLASS G

TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS G

TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS

TOTAL HOURS CALM

2143
167
161
2023
16

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

MEAN WIND SPEED = 1.91

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

DATE PRINTED: 25-APR-94

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS A (DELTA T<=-1.9 C/100 M)

SEQUOYAH NUCLEAR PLANT

APR 1, 94 - JUN 30, 94

WIND DIRECTION	CALM	0.6-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4	>=24.5	TOTAL
N	0.000	0.000	0.000	0.000	0.093	0.000	0.000	0.000	0.000	0.093
NNE	0.000	0.000	0.047	0.606	1.258	0.652	0.000	0.000	0.000	2.563
NE	0.000	0.000	0.000	0.466	0.652	0.280	0.000	0.000	0.000	1.398
ENE	0.000	0.000	0.000	0.047	0.000	0.000	0.000	0.000	0.000	0.047
E	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
ESE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
SE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
SSE	0.000	0.000	0.000	0.000	0.047	0.000	0.000	0.000	0.000	0.047
S	0.000	0.000	0.000	0.000	0.093	0.047	0.000	0.000	0.000	0.140
SSW	0.000	0.000	0.000	0.047	0.186	0.000	0.000	0.000	0.000	0.233
SW	0.000	0.000	0.000	0.093	0.233	0.186	0.000	0.000	0.000	0.513
WSW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
W	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
WNW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
NW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
NNW	0.000	0.000	0.000	0.000	0.093	0.233	0.000	0.000	0.000	0.326
SUBTOTAL	0.000	0.000	0.047	1.258	2.656	1.398	0.000	0.000	0.000	5.359

TOTAL HOURS OF VALID STABILITY OBSERVATIONS	2159
TOTAL HOURS OF STABILITY CLASS A	116
TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS A	115
TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS	2146
TOTAL HOURS CALM	0

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
 STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
 WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

DATE PRINTED: 20-JUL-94

MEAN WIND SPEED = 6.65

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS B (-1.9< DELTA T - 1.7 C/100 M)

SEQUOYAH NUCLEAR PLANT

APR 1, 94 - JUN 30, 94

WIND DIRECTION	CALM	0.6-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4	>=24.5	TOTAL
N	0.000	0.000	0.000	0.047	0.280	0.047	0.000	0.000	0.000	0.373
NNE	0.000	0.000	0.093	0.466	0.373	0.140	0.000	0.000	0.000	1.072
NE	0.000	0.000	0.233	0.606	0.140	0.000	0.000	0.000	0.000	0.979
ENE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
E	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
ESE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
SE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
SSE	0.000	0.000	0.000	0.000	0.186	0.000	0.000	0.000	0.000	0.186
S	0.000	0.000	0.000	0.047	0.047	0.000	0.000	0.000	0.000	0.093
SSW	0.000	0.000	0.000	0.186	0.513	0.000	0.000	0.000	0.000	0.699
SW	0.000	0.000	0.000	0.093	0.186	0.093	0.000	0.000	0.000	0.373
WSW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
W	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
WNW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
NW	0.000	0.000	0.000	0.000	0.000	0.140	0.000	0.000	0.000	0.140
NNW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
SUBTOTAL	0.000	0.000	0.326	1.445	1.724	0.419	0.000	0.000	0.000	3.914

TOTAL HOURS OF VALID STABILITY OBSERVATIONS	2159
TOTAL HOURS OF STABILITY CLASS B	84
TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS B	84
TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS	2146
TOTAL HOURS CALM	0

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
 STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
 WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

DATE PRINTED: 20-JUL-94

MEAN WIND SPEED = 5.64

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS C (-1.7< DELTA T<=-1.5 C/100 M)

SEQUOYAH NUCLEAR PLANT

APR 1, 94 - JUN 30, 94

WIND DIRECTION	WIND SPEED(MPH)									TOTAL
	CALM	0.6-1.4	1.5-3.3	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4	>=24.5	
N	0.000	0.000	0.140	0.186	0.093	0.093	0.000	0.000	0.000	0.513
NNE	0.000	0.000	0.373	0.513	0.186	0.233	0.000	0.000	0.000	1.305
NE	0.000	0.000	0.419	0.326	0.047	0.000	0.000	0.000	0.000	0.792
ENE	0.000	0.000	0.186	0.093	0.000	0.000	0.000	0.000	0.000	0.280
E	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
ESE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
SE	0.000	0.000	0.000	0.140	0.147	0.000	0.000	0.000	0.000	0.186
SSE	0.000	0.000	0.047	0.000	0.093	0.000	0.000	0.000	0.000	0.140
S	0.000	0.000	0.000	0.186	0.140	0.000	0.000	0.000	0.000	0.326
SSW	0.000	0.000	0.000	0.326	0.885	0.047	0.000	0.000	0.000	1.258
SW	0.000	0.000	0.000	0.466	0.280	0.047	0.000	0.000	0.000	0.792
WSW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
W	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
WNW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
NW	0.000	0.000	0.000	0.000	0.000	0.047	0.000	0.000	0.000	0.047
NNW	0.000	0.000	0.047	0.000	0.000	0.047	0.000	0.000	0.000	0.093
SUBTOTAL	0.000	0.000	1.212	2.237	1.771	0.513	0.000	0.000	0.000	5.732

TOTAL HOURS OF VALID STABILITY OBSERVATIONS
TOTAL HOURS OF STABILITY CLASS C
TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS C
TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS
TOTAL HOURS CALM

2159
125
123
2146
0

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

DATE PRINTED: 20-JUL-94

MEA4 WIND SPEED = 5.05

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS D (-1.5< DELTA T<=-0.5 C/100 M)

SEQUOYAH NUCLEAR PLANT

APR 1, 94 - JUN 30, 94

WIND DIRECTION	WIND SPEED(MPH)									TOTAL
	CALM	0.6-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4	>=24.5	
N	0.000	0.093	0.652	1.165	0.606	0.280	0.000	0.000	0.000	2.796
NNE	0.000	0.140	1.817	1.724	1.212	0.559	0.000	0.000	0.000	5.452
NE	0.000	0.047	1.351	0.652	0.326	0.047	0.000	0.000	0.000	2.423
ENE	0.000	0.000	0.326	0.000	0.000	0.000	0.000	0.000	0.000	0.326
E	0.000	0.000	0.186	0.093	0.000	0.000	0.000	0.000	0.000	0.280
ESE	0.000	0.093	0.233	0.140	0.047	0.000	0.000	0.000	0.000	0.513
SE	0.000	0.000	0.373	0.140	0.093	0.000	0.000	0.000	0.000	0.606
SSE	0.000	0.000	0.559	0.326	0.140	0.093	0.000	0.000	0.000	1.118
S	0.000	0.000	1.118	1.724	0.652	0.606	0.000	0.000	0.000	4.101
SSW	0.000	0.140	2.516	4.054	1.631	0.559	0.000	0.000	0.000	8.900
SW	0.000	0.047	0.652	2.004	0.559	0.466	0.000	0.000	0.000	3.728
WSW	0.000	0.000	0.326	0.047	0.047	0.047	0.000	0.000	0.000	0.466
W	0.000	0.047	0.047	0.047	0.000	0.000	0.000	0.000	0.000	0.140
WNW	0.000	0.047	0.186	0.140	0.047	0.000	0.000	0.000	0.000	0.419
NW	0.000	0.047	0.093	0.186	0.186	0.000	0.000	0.000	0.000	0.513
NNW	0.000	0.000	0.466	0.373	0.559	0.047	0.000	0.000	0.000	1.445
SUBTOTAL	0.000	0.699	10.904	12.815	6.104	2.703	0.000	0.000	0.000	33.225

TOTAL HOURS OF VALID STABILITY OBSERVATIONS

2159

TOTAL HOURS OF STABILITY CLASS D

718

TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS D

713

TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS

2146

TOTAL HOURS CALM

0

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT

STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS

WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

DATE PRINTED: 20-JUL-94

MEAN WIND SPEED = 4.43

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS E ($-0.5 < \Delta T \leq 1.5$ C/100 M)

SEQUOYAH NUCLEAR PLANT

APR 1, 94 - JUN 30, 94

WIND DIRECTION	CALM	0.6-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4	>=24.5	TOTAL
N	0.037	0.606	2.749	1.212	0.280	0.140	0.000	0.000	0.000	5.023
NNE	0.035	0.466	2.703	0.885	0.746	0.093	0.000	0.000	0.000	4.928
NE	0.008	0.233	0.513	0.140	0.000	0.000	0.000	0.000	0.000	0.894
ENE	0.002	0.093	0.047	0.000	0.000	0.000	0.000	0.000	0.000	0.141
E	0.002	0.093	0.047	0.000	0.000	0.000	0.000	0.000	0.000	0.141
ESE	0.004	0.140	0.186	0.000	0.000	0.000	0.000	0.000	0.000	0.330
SE	0.002	0.000	0.186	0.000	0.000	0.000	0.000	0.000	0.000	0.188
SSE	0.009	0.326	0.466	0.233	0.186	0.186	0.000	0.000	0.000	1.407
S	0.025	0.746	1.538	0.559	0.419	0.419	0.000	0.000	0.000	3.707
SSW	0.037	0.233	3.075	2.190	0.979	0.140	0.000	0.000	0.000	6.654
SW	0.032	0.280	2.563	0.792	0.466	0.373	0.000	0.000	0.000	4.505
WSW	0.011	0.280	0.746	0.233	0.047	0.000	0.000	0.000	0.000	1.316
W	0.005	0.140	0.280	0.093	0.186	0.000	0.000	0.000	0.000	0.704
WNW	0.007	0.233	0.373	0.047	0.000	0.000	0.000	0.000	0.000	0.659
NW	0.007	0.140	0.513	0.140	0.093	0.047	0.000	0.000	0.000	0.939
NNW	0.010	0.140	0.746	0.419	0.093	0.000	0.000	0.000	0.000	1.408
SUBTOTAL	0.233	4.147	16.729	6.943	3.495	1.398	0.000	0.000	0.000	32.945

TOTAL HOURS OF VALID STABILITY OBSERVATIONS	2159
TOTAL HOURS OF STABILITY CLASS E	709
TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS E	707
TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS	2146
TOTAL HOURS CALM	5

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
 STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
 WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

DATE PRINTED: 20-JUL-94

MEAN WIND SPEED = 3.30

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS F (1.5< DELTA T<= 4.0 C/100 M)

SEQUOYAH NUCLEAR PLANT

APR 1, 94 - JUN 30, 94

WIND DIRECTION	CALM	WIND SPEED(MPH)								>=24.5	TOTAL
		0.6-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4			
N	0.062	0.513	2.097	0.186	0.000	0.000	0.000	0.000	0.000	0.000	2.858
NNE	0.070	0.559	2.377	0.140	0.000	0.000	0.000	0.000	0.000	0.000	3.145
NE	0.011	0.280	0.186	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.477
ENE	0.006	0.140	0.093	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.239
E	0.002	0.047	0.047	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.095
ESE	0.004	0.186	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.191
SE	0.009	0.280	0.093	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.382
SSE	0.010	0.233	0.186	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.429
S	0.023	0.326	0.652	0.000	0.000	0.000	0.000	0.000	0.000	0.000	1.002
SSW	0.029	0.186	1.025	0.093	0.000	0.000	0.000	0.000	0.000	0.000	1.334
SW	0.028	0.093	1.072	0.140	0.000	0.000	0.000	0.000	0.000	0.000	1.332
WSW	0.002	0.000	0.093	0.093	0.000	0.000	0.000	0.000	0.000	0.000	0.189
W	0.001	0.000	0.047	0.047	0.000	0.000	0.000	0.000	0.000	0.000	0.094
WNW	0.004	0.093	0.093	0.047	0.047	0.000	0.000	0.000	0.000	0.000	0.284
NW	0.006	0.140	0.093	0.047	0.093	0.000	0.000	0.000	0.000	0.000	0.378
NNW	0.012	0.093	0.419	0.140	0.000	0.000	0.000	0.000	0.000	0.000	0.665
SUBTOTAL	0.280	3.169	8.574	0.932	0.140	0.000	0.000	0.000	0.000	0.000	13.094

2159
281
281
2146
6

TOTAL HOURS OF VALID STABILITY OBSERVATIONS
TOTAL HOURS OF STABILITY CLASS F
TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS F
TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

MEAN WIND SPEED = 2.12

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

DATE PRINTED: 20-JUL-94

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS G (DELTA T > 4.0 C/100 M)

SEQUOYAH NUCLEAR PLANT

APR 1, 94 - JUN 30, 94

WIND DIRECTION	CALM	WIND SPEED(MPH)								>=24.5	TOTAL
		0.6-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4			
N	0.025	0.047	0.233	0.000	0.000	0.000	0.000	0.000	0.000	0.305	
NNE	0.079	0.233	0.652	0.000	0.000	0.000	0.000	0.000	0.000	0.964	
NE	0.042	0.140	0.326	0.000	0.000	0.000	0.000	0.000	0.000	0.508	
ENE	0.017	0.047	0.047	0.000	0.000	0.000	0.000	0.000	0.000	0.203	
E	0.004	0.047	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.051	
ESE	0.004	0.047	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.051	
SE	0.021	0.233	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.254	
SSE	0.046	0.466	0.047	0.000	0.000	0.000	0.000	0.000	0.000	0.558	
S	0.054	0.280	0.326	0.000	0.000	0.000	0.000	0.000	0.000	0.660	
SSW	0.092	0.093	0.932	0.000	0.000	0.000	0.000	0.000	0.000	1.117	
SW	0.071	0.093	0.699	0.047	0.000	0.000	0.000	0.000	0.000	0.909	
WSW	0.004	0.047	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.051	
W	0.004	0.000	0.047	0.000	0.000	0.000	0.000	0.000	0.000	0.051	
WNW	0.004	0.000	0.047	0.000	0.000	0.000	0.000	0.000	0.000	0.051	
NW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
NNW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
SUBTOTAL	0.466	1.864	3.355	0.047	0.000	0.000	0.000	0.000	0.000	5.732	

TOTAL HOURS OF VALID STABILITY OBSERVATIONS 2159
 TOTAL HOURS OF STABILITY CLASS G 126
 TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS G 123
 TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS 2146
 TOTAL HOURS CALM 10

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
 STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
 WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

MEAN WIND SPEED = 1.66

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

DATE PRINTED: 20-JUL-94

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS A (DELTA T=-1.9 C/100 M)

SEQUOYAH NUCLEAR PLANT

JUL 1, 94 - SEP 30, 94

WIND DIRECTION	CALM	WIND SPEED(MPH)								>=24.5	TOTAL
		0.6-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4			
N	0.000	0.000	0.000	0.000	0.000	0.046	0.000	0.000	0.000	0.046	
NNE	0.000	0.000	0.046	0.684	0.182	0.137	0.000	0.000	0.000	1.049	
NE	0.000	0.000	0.046	0.502	0.046	0.000	0.000	0.000	0.000	0.593	
ENE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
E	0.000	0.000	0.046	0.000	0.000	0.000	0.000	0.000	0.000	0.046	
ESE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
SE	0.000	0.000	0.000	0.046	0.000	0.000	0.000	0.000	0.000	0.046	
SSE	0.000	0.000	0.000	0.000	0.046	0.000	0.000	0.000	0.000	0.046	
S	0.000	0.000	0.000	0.000	0.137	0.000	0.000	0.000	0.000	0.137	
SSW	0.000	0.000	0.000	0.182	0.274	0.000	0.000	0.000	0.000	0.456	
SW	0.000	0.000	0.046	0.182	0.182	0.000	0.000	0.000	0.000	0.411	
WSW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
W	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
WNW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
NW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
NNW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
SUBTOTAL	0.000	0.000	0.182	1.597	0.867	0.182	0.000	0.000	0.000	2.828	

TOTAL HOURS OF VALID STABILITY OBSERVATIONS

TOTAL HOURS OF STABILITY CLASS A

TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS A

TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS

TOTAL HOURS CALM

2197
62
62
2192
0

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

MEAN WIND SPEED = 5.17

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

DATE PRINTED: 3-NOV-94

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS B (-1.9 < DELTA T < -1.7 C/100 M)

SEQUOYAH NUCLEAR PLANT

JUL 1, 94 - SEP 30, 94

WIND DIRECTION	CALM	WIND SPEED (MPH)						18.5-24.4	>=24.5	TOTAL
		0.5-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4			
N	0.000	0.000	0.000	0.182	0.000	0.046	0.000	0.000	0.000	0.228
NNE	0.000	0.000	0.182	0.821	0.228	0.046	0.000	0.000	0.000	1.277
NE	0.000	0.000	0.228	0.456	0.000	0.000	0.000	0.000	0.000	0.684
ENE	0.000	0.000	0.137	0.000	0.000	0.000	0.000	0.000	0.000	0.137
E	0.000	0.000	0.046	0.000	0.000	0.000	0.000	0.000	0.000	0.046
ESE	0.000	0.000	0.046	0.046	0.000	0.000	0.000	0.000	0.000	0.091
SE	0.000	0.000	0.000	0.137	0.000	0.000	0.000	0.000	0.000	0.137
SSE	0.000	0.000	0.046	0.000	0.000	0.000	0.000	0.000	0.000	0.046
S	0.000	0.000	0.000	0.091	0.137	0.000	0.000	0.000	0.000	0.228
SSW	0.000	0.000	0.000	0.502	0.228	0.000	0.000	0.000	0.000	0.730
SW	0.000	0.000	0.046	0.137	0.091	0.046	0.000	0.000	0.000	0.319
WSW	0.000	0.000	0.000	0.046	0.000	0.000	0.000	0.000	0.000	0.046
W	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
WNW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
NW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
NNW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
SUBTOTAL	0.000	0.000	0.730	2.418	0.684	0.137	0.000	0.000	0.000	3.969

TOTAL HOURS OF VALID STABILITY OBSERVATIONS

TOTAL HOURS OF STABILITY CLASS B

TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS B

TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS

TOTAL HOURS CALM

2197
87
87
2192
0

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

MEAN WIND SPEED = 4.63

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

DATE PRINTED: 3-NOV-94

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS C (-1.7< DELTA T<=-1.5 C/100 M)

SEQUOYAH NUCLEAR PLANT

JUL 1, 94 - SEP 30, 94

WIND DIRECTION	WIND SPEED(MPH)									TOTAL
	CALM	0.6-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4	>=24.5	
N	0.000	0.000	0.000	0.137	0.091	0.000	0.000	0.000	0.000	0.228
NNE	0.000	0.000	0.274	0.639	0.137	0.046	0.000	0.000	0.000	1.095
NE	0.000	0.000	0.730	0.137	0.091	0.000	0.000	0.000	0.000	0.958
ENE	0.000	0.000	0.137	0.000	0.000	0.000	0.000	0.000	0.000	0.137
E	0.000	0.000	0.137	0.091	0.000	0.000	0.000	0.000	0.000	0.228
ESE	0.000	0.000	0.091	0.000	0.046	0.000	0.000	0.000	0.000	0.137
SE	0.000	0.000	0.046	0.091	0.091	0.000	0.000	0.000	0.000	0.228
SSE	0.000	0.000	0.137	0.091	0.000	0.000	0.000	0.000	0.000	0.228
S	0.000	0.000	0.091	0.502	0.046	0.046	0.000	0.000	0.000	0.684
SSW	0.000	0.000	0.228	0.867	0.456	0.000	0.000	0.000	0.000	1.551
SW	0.000	0.000	0.228	1.095	0.137	0.046	0.000	0.000	0.000	1.505
WSW	0.000	0.000	0.046	0.000	0.000	0.000	0.000	0.000	0.000	0.046
W	0.000	0.000	0.046	0.046	0.000	0.000	0.000	0.000	0.000	0.091
WNW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
NW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
NNW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
SUBTOTAL	0.000	0.000	2.190	3.695	1.095	0.137	0.000	0.000	0.000	7.117

TOTAL HOURS OF VALID STABILITY OBSERVATIONS
 TOTAL HOURS OF STABILITY CLASS C
 TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS C
 TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS
 TOTAL HOURS CALM

2197
 157
 156
 2192
 0

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
 STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
 WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

DATE PRINTED: 3-NOV-94

MEAN WIND SPEED = 4.28

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS D (-1.5 < DELTA T <= -0.5 C/100 M)

SEQUOYAH NUCLEAR PLANT

JUL 1, 94 - SEP 30, 94

WIND DIRECTION	WIND SPEED(MPH)									TOTAL
	CALM	0.6-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4	>=24.5	
N	0.016	0.091	1.688	0.776	0.274	0.046	0.000	0.000	0.000	2.890
NNE	0.019	0.137	1.962	1.916	1.004	0.411	0.000	0.000	0.000	5.447
NE	0.011	0.182	1.049	0.319	0.046	0.000	0.000	0.000	0.000	1.608
ENE	0.004	0.000	0.411	0.182	0.000	0.000	0.000	0.000	0.000	0.597
E	0.005	0.091	0.502	0.137	0.000	0.000	0.000	0.000	0.000	0.735
ESE	0.004	0.000	0.502	0.182	0.046	0.000	0.000	0.000	0.000	0.734
SE	0.008	0.137	0.821	0.182	0.000	0.000	0.000	0.000	0.000	1.149
SSE	0.016	0.456	1.369	0.593	0.137	0.228	0.000	0.000	0.000	2.799
S	0.040	0.137	4.334	2.327	0.365	0.000	0.000	0.000	0.000	7.202
SSW	0.031	0.182	3.285	4.471	0.547	0.000	0.000	0.000	0.000	8.516
SW	0.015	0.091	1.642	1.004	0.228	0.000	0.000	0.000	0.000	2.981
WSW	0.004	0.046	0.411	0.182	0.046	0.000	0.000	0.000	0.000	0.688
W	0.002	0.046	0.137	0.046	0.046	0.000	0.000	0.000	0.000	0.275
WNW	0.003	0.046	0.274	0.046	0.046	0.000	0.000	0.000	0.000	0.413
NW	0.002	0.000	0.228	0.046	0.046	0.000	0.000	0.000	0.000	0.321
NNW	0.003	0.000	0.319	0.046	0.000	0.000	0.000	0.000	0.000	0.368
SUBTOTAL	0.182	1.642	18.932	12.454	2.828	0.684	0.000	0.000	0.000	36.724

TOTAL HOURS OF VALID STABILITY OBSERVATIONS	2197
TOTAL HOURS OF STABILITY CLASS D	807
TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS D	805
TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS	2192
TOTAL HOURS CALM	4

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
 STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
 WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

DATE PRINTED: 3-NOV-94

MEAN WIND SPEED = 3.49

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS E (-0.5< DELTA T<= 1.5 C/100 M)

SEQUOYAH NUCLEAR PLANT

JUL 1, 94 - SEP 30, 94

WIND DIRECTION	WIND SPEED(MPH)									TOTAL
	CALM	0.6-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4	>=24.5	
N	0.414	1.688	5.429	0.958	0.137	0.000	0.000	0.000	0.000	8.625
NNE	0.231	1.323	2.646	0.639	0.000	0.000	0.000	0.000	0.000	4.838
NE	0.024	0.228	0.182	0.046	0.000	0.000	0.000	0.000	0.000	0.480
ENE	0.021	0.228	0.137	0.000	0.000	0.000	0.000	0.000	0.000	0.386
E	0.019	0.091	0.228	0.000	0.000	0.000	0.000	0.000	0.000	0.338
ESE	0.016	0.228	0.046	0.000	0.000	0.000	0.000	0.000	0.000	0.290
SE	0.066	0.867	0.274	0.091	0.000	0.000	0.000	0.000	0.000	1.298
SSE	0.095	0.684	0.958	0.228	0.046	0.000	0.000	0.000	0.000	2.012
S	0.191	1.049	2.235	0.411	0.091	0.000	0.000	0.000	0.000	3.977
SSW	0.172	0.593	2.372	0.319	0.091	0.000	0.000	0.000	0.000	3.548
SW	0.156	0.502	2.190	0.547	0.091	0.046	0.000	0.000	0.000	3.532
WSW	0.074	0.274	1.004	0.091	0.091	0.000	0.000	0.000	0.000	1.534
W	0.072	0.593	0.639	0.091	0.046	0.000	0.000	0.000	0.000	1.440
WNW	0.029	0.274	0.228	0.091	0.000	0.000	0.000	0.000	0.000	0.622
NW	0.045	0.319	0.456	0.000	0.000	0.000	0.000	0.000	0.000	0.821
NNW	0.154	1.186	1.460	0.137	0.091	0.000	0.000	0.000	0.000	3.028
SUBTOTAL	1.779	10.128	20.484	3.650	0.684	0.046	0.000	0.000	0.000	36.770

TOTAL HOURS OF VALID STABILITY OBSERVATIONS
 TOTAL HOURS OF STABILITY CLASS E
 TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS E
 TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS
 TOTAL HOURS CALM

2197
 807
 806
 2192
 39

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
 STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
 WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

DATE PRINTED: 3-NOV-94

MEAN WIND SPEED = 2.09

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS F (1.5< DELTA T<= 4.0 C/100 M)

SEQUOYAH NUCLEAR PLANT

JUL 1, 94 - SEP 30, 94

WIND DIRECTION	CALM	WIND SPEED(MPH)								>=24.5	TOTAL
		0.6-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4			
N	0.100	0.684	3.695	0.091	0.000	0.000	0.000	0.000	0.000	4.570	
NNE	0.084	1.049	2.646	0.000	0.000	0.000	0.000	0.000	0.000	3.779	
NE	0.010	0.365	0.091	0.000	0.000	0.000	0.000	0.000	0.000	0.467	
ENE	0.003	0.137	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.140	
E	0.002	0.046	0.046	0.000	0.000	0.000	0.000	0.000	0.000	0.093	
ESE	0.010	0.411	0.046	0.000	0.000	0.000	0.000	0.000	0.000	0.467	
SE	0.004	0.137	0.046	0.000	0.000	0.000	0.000	0.000	0.000	0.187	
SSE	0.007	0.182	0.137	0.000	0.000	0.000	0.000	0.000	0.000	0.327	
S	0.008	0.137	0.228	0.046	0.000	0.000	0.000	0.000	0.000	0.419	
SSW	0.004	0.046	0.137	0.000	0.000	0.000	0.000	0.000	0.000	0.187	
SW	0.007	0.046	0.274	0.000	0.000	0.000	0.000	0.000	0.000	0.327	
WSW	0.006	0.046	0.228	0.000	0.000	0.000	0.000	0.000	0.000	0.280	
W	0.003	0.046	0.091	0.000	0.000	0.000	0.000	0.000	0.000	0.149	
WNW	0.002	0.091	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.093	
NW	0.005	0.091	0.137	0.000	0.000	0.000	0.000	0.000	0.000	0.233	
NNW	0.017	0.182	0.547	0.000	0.000	0.000	0.000	0.000	0.000	0.747	
SUBTOTAL	0.274	3.695	8.349	0.137	0.000	0.000	0.000	0.000	0.000	12.454	

TOTAL HOURS OF VALID STABILITY OBSERVATIONS 2197
 TOTAL HOURS OF STABILITY CLASS F 274
 TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS F 273
 TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS 2192
 TOTAL HOURS CALM 6

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
 STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
 WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

MEAN WIND SPEED = 1.77

NOTE: TOTALS AND SUBTOTALS ARE RECALCULATED FROM UNROUNDED NUMBERS

DATE PRINTED: 3-NOV-94

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS G (DELTA T > 4.0 C/100 M)

SEQUOYAH NUCLEAR PLANT

JUL 1, 94 - SEP 30, 94

WIND DIRECTION	WIND SPEED(MPH)										TOTAL
	CALM	0.6-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4	>24.5		
N	0.000	0.000	0.046	0.000	0.000	0.000	0.000	0.000	0.000	0.046	
NNE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
NE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
ENE	0.000	0.000	0.046	0.000	0.000	0.000	0.000	0.000	0.000	0.046	
E	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
ESE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
SE	0.000	0.046	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.046	
SSE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
S	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
SSW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
SW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
WSW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
W	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
WNW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
NW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
NNW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	
SUBTOTAL	0.000	0.046	0.091	0.000	0.000	0.000	0.000	0.000	0.000	0.137	

TOTAL HOURS OF VALID STABILITY OBSERVATIONS

TOTAL HOURS OF STABILITY CLASS G

TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS G

TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS

TOTAL HOURS CALM

2197
3
3
2192
0

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT

STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS

WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

MEAN WIND SPEED = 1.80

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

DATE PRINTED: 3-NOV-94

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS A (DELTA T<=-1.9 C/100 M)

SEQUOYAH NUCLEAR PLANT

OCT 1, 94 - DEC 31, 94

WIND DIRECTION	CALM	0.6-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4	>=24.5	TOTAL
N	0.000	0.000	0.000	0.000	0.000	0.092	0.000	0.000	0.000	0.092
NNE	0.000	0.000	0.000	0.138	0.138	0.000	0.000	0.000	0.000	0.275
NE	0.000	0.000	0.046	0.183	0.046	0.000	0.000	0.000	0.000	0.275
ENE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
E	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
ESE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
SE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
SSE	0.000	0.000	0.000	0.000	0.046	0.000	0.000	0.000	0.000	0.046
S	0.000	0.000	0.000	0.046	0.046	0.000	0.000	0.000	0.000	0.092
SSW	0.000	0.000	0.000	0.046	0.046	0.000	0.000	0.000	0.000	0.092
SW	0.000	0.000	0.000	0.367	0.092	0.000	0.000	0.000	0.000	0.459
WSW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
W	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
WNW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
NW	0.000	0.000	0.000	0.000	0.000	0.046	0.000	0.000	0.000	0.046
NNW	0.000	0.000	0.000	0.000	0.000	0.092	0.000	0.000	0.000	0.092
SUBTOTAL	0.000	0.000	0.046	0.779	0.413	0.321	0.000	0.000	0.000	1.559

TOTAL HOURS OF VALID STABILITY OBSERVATIONS

TOTAL HOURS OF STABILITY CLASS A

TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS A

TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS

TOTAL HOURS CALM

2199
35
34
2181
0

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

MEAN WIND SPEED = 5.95

DATE PRINTED: 5-JAN-95

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS B (-1.9< DELTA T<=-1.7 C/100 M)

SEQUOYAH NUCLEAR PLANT

OCT 1, 94 - DEC 31, 94

WIND DIRECTION	CALM	0.6-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4	>=24.5	TOTAL
N	0.000	0.000	0.000	0.046	0.046	0.275	0.000	0.000	0.000	0.367
NNE	0.000	0.000	0.092	0.046	0.138	0.229	0.000	0.000	0.000	0.504
NE	0.000	0.000	0.138	0.000	0.000	0.000	0.000	0.000	0.000	0.321
ENE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
E	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
ESE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
SE	0.000	0.000	0.092	0.000	0.000	0.000	0.000	0.000	0.000	0.092
SSE	0.000	0.000	0.092	0.000	0.000	0.000	0.000	0.000	0.000	0.092
S	0.000	0.000	0.000	0.000	0.000	0.046	0.000	0.000	0.000	0.367
SSW	0.000	0.000	0.046	0.229	0.092	0.046	0.000	0.000	0.000	0.413
SW	0.000	0.000	0.000	0.367	0.092	0.000	0.000	0.000	0.000	0.459
WSW	0.000	0.000	0.046	0.000	0.000	0.000	0.000	0.000	0.000	0.046
W	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
WNW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.046
NW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
NNW	0.000	0.000	0.000	0.000	0.000	0.046	0.000	0.000	0.000	0.046
SUBTOTAL	0.000	0.000	0.504	1.100	0.504	0.642	0.000	0.000	0.000	2.751

TOTAL HOURS OF VALID STABILITY OBSERVATIONS

TOTAL HOURS OF STABILITY CLASS B

TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS B

TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS

TOTAL HOURS CALM

2199
60
60
2181
0

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

MEAN WIND SPEED = 5.52

DATE PRINTED: 5-JAN-95

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS C (-1.7 < DELTA T < -1.5 C/100 M)

SEQUOYAH NUCLEAR PLANT

OCT 1, 94 - DEC 31, 94

WIND DIRECTION	WIND SPEED (MPH)								TOTAL
	CALM	0.6-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4	>=24.5
N	0.000	0.000	0.000	0.229	0.138	0.092	0.000	0.000	0.459
NNE	0.000	0.000	0.183	0.642	0.642	0.734	0.000	0.000	2.201
NE	0.000	0.000	0.229	0.413	0.046	0.000	0.000	0.000	0.688
ENE	0.000	0.000	0.183	0.046	0.000	0.000	0.000	0.000	0.229
E	0.000	0.000	0.046	0.000	0.000	0.000	0.000	0.000	0.046
ESE	0.000	0.000	0.046	0.000	0.000	0.000	0.000	0.000	0.046
SE	0.000	0.000	0.092	0.046	0.000	0.000	0.000	0.000	0.138
SSE	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
S	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
SSW	0.000	0.000	0.092	0.138	0.046	0.000	0.000	0.000	0.275
SW	0.000	0.000	0.138	0.550	0.092	0.000	0.000	0.000	0.779
WSW	0.000	0.000	0.000	0.046	0.000	0.000	0.000	0.000	0.046
W	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
WNW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
NW	0.000	0.000	0.000	0.000	0.000	0.046	0.000	0.000	0.046
NNW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
SUBTOTAL	0.000	0.000	1.009	2.109	0.963	0.871	0.000	0.000	4.952

TOTAL HOURS OF VALID STABILITY OBSERVATIONS 2199
 TOTAL HOURS OF STABILITY CLASS C 110
 TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS C 108
 TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS 2181
 TOTAL HOURS CALM 0

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
 STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
 WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

MEAN WIND SPEED = 5.40

DATE PRINTED: 5-JAN-95

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS D (-1.5 < DELTA T < -0.5 C/100 M)

SEQUOYAH NUCLEAR PLANT

OCT 1, 94 - DEC 31, 94

WIND DIRECTION	CALM	WIND SPEED (MPH)								>=24.5	TOTAL
		0.6-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4	24.5-30.4		
N	0.011	0.092	1.376	1.009	1.146	1.376	0.000	0.000	0.000	0.000	5.009
NNE	0.017	0.092	2.201	4.127	4.310	2.934	0.092	0.000	0.000	0.000	13.773
NE	0.011	0.046	1.421	0.459	0.138	0.046	0.000	0.000	0.000	0.000	2.120
ENE	0.002	0.092	0.138	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.231
E	0.001	0.000	0.183	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.185
ESE	0.001	0.000	0.183	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.185
SE	0.002	0.092	0.183	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.277
SSE	0.003	0.183	0.275	0.092	0.000	0.046	0.000	0.000	0.000	0.000	0.600
S	0.009	0.000	1.192	0.871	0.000	0.321	0.000	0.000	0.000	0.000	2.393
SSW	0.012	0.092	1.467	3.255	1.421	0.413	0.000	0.000	0.000	0.000	6.660
SW	0.012	0.092	1.467	0.688	0.092	0.092	0.000	0.000	0.000	0.000	2.442
WSW	0.004	0.046	0.459	0.046	0.046	0.000	0.000	0.000	0.000	0.000	0.600
W	0.002	0.046	0.229	0.046	0.000	0.046	0.000	0.000	0.000	0.000	0.369
WNW	0.001	0.092	0.046	0.046	0.046	0.138	0.000	0.000	0.000	0.000	0.368
NW	0.001	0.046	0.092	0.092	0.092	0.183	0.000	0.000	0.000	0.000	0.505
NNW	0.001	0.000	0.183	0.138	0.413	0.183	0.000	0.000	0.000	0.000	0.918
SUBTOTAL	0.092	1.009	11.096	10.867	7.703	5.777	0.092	0.000	0.000	0.000	36.635

TOTAL HOURS OF VALID STABILITY OBSERVATIONS 2199
 TOTAL HOURS OF STABILITY CLASS D 802
 TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS D 799
 TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS 2181
 TOTAL HOURS CALM 2

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
 STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
 WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

MEAN WIND SPEED = 4.91

DATE PRINTED: 5-JAN-95

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS E (-0.5< DELTA T<= 1.5 C/100 M)

SEQUOYAH NUCLEAR PLANT
OCT 1, 94 - DEC 31, 94

WIND DIRECTION	CALM	WIND SPEED(MPH)								TOTAL
		0.6-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4	>=24.5	
N	0.209	0.734	3.393	1.605	1.192	0.138	0.000	0.000	0.000	7.270
NNE	0.276	0.917	4.539	2.934	0.504	0.092	0.000	0.000	0.000	9.263
NE	0.056	0.688	0.413	0.000	0.000	0.000	0.000	0.000	0.000	1.156
ENE	0.019	0.321	0.046	0.000	0.000	0.000	0.000	0.000	0.000	0.385
E	0.023	0.367	0.092	0.000	0.000	0.000	0.000	0.000	0.000	0.482
ESE	0.014	0.275	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.289
SE	0.014	0.229	0.046	0.000	0.000	0.000	0.000	0.000	0.000	0.269
SSE	0.046	0.504	0.413	0.000	0.000	0.046	0.000	0.000	0.000	1.055
S	0.125	0.642	1.834	0.596	0.138	0.413	0.000	0.000	0.000	3.747
SSW	0.142	0.504	2.293	0.779	0.275	0.229	0.000	0.000	0.000	4.222
SW	0.090	0.367	1.421	0.275	0.092	0.092	0.000	0.000	0.000	2.337
WSW	0.037	0.321	0.413	0.092	0.092	0.000	0.000	0.000	0.000	0.954
W	0.012	0.138	0.092	0.046	0.000	0.000	0.000	0.000	0.000	0.287
WNW	0.012	0.046	0.183	0.046	0.000	0.000	0.000	0.000	0.000	0.333
NW	0.026	0.092	0.413	0.275	0.000	0.046	0.000	0.000	0.000	0.851
NNW	0.046	0.413	0.504	0.092	0.046	0.000	0.000	0.000	0.000	1.101
SUBTOTAL	1.146	6.557	16.094	6.786	2.384	1.055	0.000	0.000	0.000	34.021

TOTAL HOURS OF VALID STABILITY OBSERVATIONS	2199
TOTAL HOURS OF STABILITY CLASS E	746
TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS E	742
TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS	2181
TOTAL HOURS CALM	25

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

MEAN WIND SPEED = 2.92

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

DATE PRINTED: 5-JAN-95

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS F (1.5 < DELTA T <= 4.0 C/100 M)

SEQUOYAH NUCLEAR PLANT

OCT 1, 94 - DEC 31, 94

WIND DIRECTION	CALM	0.6-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4	>=24.5	TOTAL
N	0.119	0.183	2.109	0.459	0.000	0.000	0.000	0.000	0.000	2.871
NNE	0.337	1.880	4.585	0.183	0.092	0.000	0.000	0.000	0.000	7.077
NE	0.079	1.055	0.459	0.000	0.000	0.000	0.000	0.000	0.000	1.592
ENE	0.017	0.321	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.328
E	0.012	0.229	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.241
ESE	0.012	0.229	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.241
SE	0.014	0.183	0.092	0.000	0.000	0.000	0.000	0.000	0.000	0.289
SSE	0.022	0.275	0.138	0.000	0.000	0.000	0.000	0.000	0.000	0.434
S	0.026	0.138	0.367	0.046	0.000	0.000	0.000	0.000	0.000	0.576
SSW	0.045	0.275	0.596	0.000	0.000	0.000	0.000	0.000	0.000	0.917
SW	0.022	0.046	0.367	0.000	0.000	0.000	0.000	0.000	0.000	0.434
WSW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
W	0.002	0.000	0.046	0.000	0.000	0.000	0.000	0.000	0.000	0.048
WNW	0.012	0.092	0.138	0.000	0.000	0.000	0.000	0.000	0.000	0.241
NW	0.010	0.092	0.092	0.138	0.000	0.000	0.000	0.000	0.000	0.331
NNW	0.005	0.000	0.092	0.092	0.000	0.000	0.000	0.000	0.000	0.188
SUBTOTAL	0.734	4.998	9.078	0.917	0.092	0.000	0.000	0.000	0.000	15.818

TOTAL HOURS OF VALID STABILITY OBSERVATIONS 2199
 TOTAL HOURS OF STABILITY CLASS F 349
 TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS F 345
 TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS 2181
 TOTAL HOURS CALM 16

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
 STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
 WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

MEAN WIND SPEED = 1.86

DATE PRINTED: 5-JAN-95

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

JOINT PERCENTAGE FREQUENCIES OF WIND SPEED BY WIND DIRECTION FOR

STABILITY CLASS G (DELTA T > 4.0 C/100 M)

SEQUOYAH NUCLEAR PLANT

OCT 1, 94 - DEC 31, 94

WIND DIRECTION	CALM	0.6-1.4	1.5-3.4	3.5-5.4	5.5-7.4	7.5-12.4	12.5-18.4	18.5-24.4	>=24.5	TOTAL
N	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
NNE	0.089	0.459	1.100	0.000	0.000	0.000	0.000	0.000	0.000	1.647
NE	0.039	0.229	0.459	0.000	0.000	0.000	0.000	0.000	0.000	0.727
ENE	0.013	0.183	0.046	0.000	0.000	0.000	0.000	0.000	0.000	0.242
E	0.008	0.138	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.145
ESE	0.003	0.046	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.048
SE	0.016	0.275	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.291
SSE	0.023	0.138	0.275	0.000	0.000	0.000	0.000	0.000	0.000	0.436
S	0.018	0.092	0.229	0.000	0.000	0.000	0.000	0.000	0.000	0.339
SSW	0.018	0.046	0.275	0.000	0.000	0.000	0.000	0.000	0.000	0.339
SW	0.003	0.000	0.046	0.000	0.000	0.000	0.000	0.000	0.000	0.048
WSW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
W	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
WNW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
NW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
NNW	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
SUBTOTAL	0.229	1.605	2.430	0.000	0.000	0.000	0.000	0.000	0.000	4.264

TOTAL HOURS OF VALID STABILITY OBSERVATIONS 2199
 TOTAL HOURS OF STABILITY CLASS G 97
 TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY CLASS G 93
 TOTAL HOURS OF VALID WIND DIRECTION-WIND SPEED-STABILITY OBSERVATIONS 2181
 TOTAL HOURS CALM 5

METEOROLOGICAL FACILITY: SEQUOYAH NUCLEAR PLANT
 STABILITY BASED ON DELTA-T BETWEEN 9.25 AND 45.99 METERS
 WIND SPEED AND DIRECTION MEASURED AT 9.73 METER LEVEL

MEAN WIND SPEED = 1.58

DATE PRINTED: 5-JAN-95

NOTE: TOTALS AND SUBTOTALS ARE OBTAINED FROM UNROUNDED NUMBERS

ENCLOSURE 3

SEQUOYAH NUCLEAR PLANT

OFFSITE DOSE CALCULATION MANUAL

(REVISIONS 32, 33, 34, AND 35)

QA RECORD

538 941028 800

SEQUOYAH NUCLEAR PLANT
OFFSITE DOSE CALCULATION MANUAL

Revision 35

Prepared By: Beth E. Ford-Jones Date 12/25/94

Sponsor: [Signature] Date 10/25/94

PORC Approval: [Signature] Date 10-26-94

Effective Date: 11/21/94

SEQUOYAH NUCLEAR PLANT
OFFSITE DOSE CALCULATION MANUAL
REVISION LOG
(Page 1 of 1)

Revision	Approval Date	Revision	Approval Date	Effective Date
Original ODCM	2/29/80 ¹	Revision 19	3/30/88 ²	
Revision 1	4/15/80 ²	Revision 20	7/19/88 ²	
Revision 2	10/7/80 ²	Revision 20A	12/14/88 ²	
Revision 3	11/3/80, 2/10/81, 4/8/81, 6/4/81 ²	Revision 21	2/15/89 ²	
Revision 4	10/22/81, 11/28/81, 4/29/82, 11/22/82 ²	Revision 22	6/1/89 ²	
Revision 5	10/21/82 ²	Revision 23	6/28/89, 9/15/89 ⁴	
Revision 6	1/20/83 ²	Revision 25	11/2/90, 4/24/91 ²	
Revision 7	3/23/83 ²	Revision 26	1/17/92 ⁵	3/17/92
Revision 8	12/16/83 ²	Revision 27	4/15/92 ²	
Revision 9	3/7/84 ²	Revision 28	9/22/92 ⁶	12/1/92
Revision 10	4/24/84 ²	Revision 29	3/30/93 ²	
Revision 11	8/21/84	Revision 30	9/30/93 ²	
Revision 12	2/19/85 ²	Revision 31	10/13/93 ²	
Revision 13	12/02/85 ²	Revision 32	11/29/93 ²	1/1/94
Revision 14	4/14/86 ²	Revision 33	2/25/94 ²	
Revision 15	11/5/86 ³	Revision 34	4/29/94 ²	5/15/94
Revision 16	1/16/87 ²	Revision 35	10/26/94 ⁶	11/21/94
Revision 17	10/28/87 ²			
Revision 18	1/5/88 ²			

¹ Low power license for Sequoyah Unit 1.

² RARC Meeting Date.

³ Date approved by RARC Chairman.

⁴ Revision 23 implements the Nuclear Data Effluent Management Software. This ODCM revision and the software will be implemented concurrently on October 9, 1989. Releases made during the month of October prior to the software implementation will be backfitted to comply with this revision.

⁵ Revision 26 was recommended for approval by the SQN RARC at the October 2, 1991 meeting. The revision date is January 17, 1992. The final implementation date for Revision 26 will be March 17, 1992.

⁶ PORC Meeting Date.

INTRODUCTION	6
1/2 CONTROLS AND SURVEILLANCE REQUIREMENTS	8
1/2.0 APPLICABILITY	8
1/2.1 INSTRUMENTATION	10
1/2.1.1 RADIOACTIVE LIQUID EFFLUENT MONITORING INSTRUMENTATION	10
TABLE 1.1-1 RADIOACTIVE LIQUID EFFLUENT MONITORING INSTRUMENTATION	11
TABLE 2.1-1 - RADIOACTIVE LIQUID EFFLUENT MONITORING INSTRUMENTATION SURVEILLANCE REQUIREMENTS	13
1/2.1.2 RADIOACTIVE GASEOUS EFFLUENT MONITORING INSTRUMENTATION	15
TABLE 1.1-2 RADIOACTIVE GASEOUS EFFLUENT MONITORING INSTRUMENTATION	16
TABLE 2.1-2 RADIOACTIVE GASEOUS EFFLUENT MONITORING INSTRUMENTATION SURVEILLANCE REQUIREMENTS	18
1/2.2 RADIOACTIVE EFFLUENTS	20
1/2.2.1 LIQUID EFFLUENTS	20
1/2.2.1.1 CONCENTRATION	20
TABLE 2.2-1 RADIOACTIVE LIQUID WASTE SAMPLING AND ANALYSIS PROGRAM	21
1/2.2.1.2 DOSE	24
1/2.2.1.3 LIQUID RADWASTE TREATMENT SYSTEM	25
1/2.2.2 GASEOUS EFFLUENTS	26
1/2.2.2.1 DOSE RATE	26
TABLE 2.2-2 RADIOACTIVE GASEOUS WASTE MONITORING SAMPLING AND ANALYSIS PROGRAM	27
1/2.2.2.2 DOSE - NOBLE GASES	30
1/2.2.2.3 DOSE - I-131, I-133, TRITIUM AND RADIONUCLIDES IN PARTICULATE FORM WITH HALF-LIVES GREATER THAN EIGHT DAYS	31
1/2.2.2.4 GASEOUS RADWASTE TREATMENT	32
1/2.2.3 TOTAL DOSE	33
1/2.3 RADIOLOGICAL ENVIRONMENTAL MONITORING	34
1/2.3.1 MONITORING PROGRAM	34
TABLE 2.3-1 MINIMUM REQUIRED RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM	36
TABLE 2.3-2 REPORTING LEVELS FOR RADIOACTIVITY CONCENTRATIONS IN ENVIRONMENTAL SAMPLES	38
TABLE 2.3-3 MAXIMUM VALUES FOR THE LOWER LIMITS OF DETECTION	39
1/2.3.2 LAND USE CENSUS	41
1/2.3.3 INTERLABORATORY COMPARISON PROGRAM	43
BASES	45
INSTRUMENTATION	45
1/2.1.1 RADIOACTIVE LIQUID EFFLUENT MONITORING INSTRUMENTATION	45

1/2.1.2 RADIOACTIVE GASEOUS EFFLUENT MONITORING INSTRUMENTATION	45
1/2.2 RADIOACTIVE EFFLUENTS	45
1/2.2.1.1 CONCENTRATION	45
1/2.2.1.2 DOSE	45
1/2.2.1.3 LIQUID RADWASTE TREATMENT SYSTEM	46
1/2.2.2.1 DOSE RATE	46
1/2.2.2.2 DOSE - NOBLE GASES	47
1/2.2.2.3 DOSE - IODINE-131, IODINE-133, TRITIUM, AND RADIOACTIVE MATERIAL IN PARTICULATE FORM WITH HALF-LIFE GREATER THAN EIGHT DAYS	47
1/2.3.2.4 GASEOUS RADWASTE TREATMENT SYSTEM	48
1/2.2.3 TOTAL DOSE	48
1/2.3 RADIOLOGICAL ENVIRONMENTAL MONITORING	49
1/2.3.1 MONITORING PROGRAM	49
1/2.3.2 LAND USE CENSUS	49
1/2.3.3 INTERLABORATORY COMPARISON	49
3.0 DEFINITIONS	51
3.1 CHANNEL CALIBRATION	51
3.2 CHANNEL CHECK	51
3.3 CHANNEL FUNCTIONAL TEST	51
3.4 CONTROLLED AREA	51
3.5 DOSE EQUIVALENT I-131	51
3.6 GASEOUS RADWASTE TREATMENT SYSTEM	51
3.7 MEMBER(S) OF THE PUBLIC	52
3.8 OPERABLE - OPERABILITY	52
3.9 MODE	52
3.10 PURGE - PURGING	52
3.11 RATED THERMAL POWER	52
3.12 RESTRICTED AREA	52
3.13 SITE BOUNDARY	52
3.14 SOURCE/SENSOR CHECK	52
3.15 UNRESTRICTED AREA/BOUNDARY	53
3.16 VENTILATION EXHAUST TREATMENT SYSTEM	53
3.17 VENTING	53
TABLE 3.1 FREQUENCY NOTATION	54
FIGURE 3.1 UNRESTRICTED AREA BOUNDARY	55
5.0 ADMINISTRATIVE CONTROLS	58
5.1 ANNUAL RADIOLOGICAL ENVIRONMENTAL OPERATING REPORT	58
5.2 ANNUAL RADIOACTIVE EFFLUENT RELEASE REPORT	58
5.3 OFFSITE DOSE CALCULATION MANUAL CHANGES	60
5.4 SPECIAL REPORTS	60
SECTION 6.0 LIQUID EFFLUENTS	62
RELEASE POINTS	62
6.1 LIQUID RELEASES	63
6.1.1 Pre-Release Analysis	63
6.1.2 Effluent Concentration Limits (ECL)-Sum of the Ratios	63
6.1.3 Post-Release Analysis	64
6.2 INSTRUMENT SETPOINTS	65

6.2.1 Process Discharge Point Monitor Setpoints (0-RE-90-133, 134, 140, 141).....	65
6.2.2 Release Point Monitor Setpoints (0-RM-90-122; 0-RM-90-225; 0-RM-90-212; 1,2-RM-90-20, i21).....	65
6.2.3 Batch Release Point Monitor Setpoint.....	65
6.3 CUMULATIVE LIQUID EFFLUENT DOSE CALCULATIONS	67
6.3.1 Monthly Dose Calculations.....	68
6.3.2 Cumulative Doses.....	68
6.3.3 Comparison to Limits.....	68
6.4 LIQUID RADWASTE TREATMENT SYSTEM.....	69
6.5 DOSE PROJECTIONS	70
6.6 QUARTERLY DOSE CALCULATIONS	71
6.6.1 WATER INGESTION	71
6.6.2 FISH INGESTION	72
6.6.3 SHORELINE RECREATION.....	72
6.6.4 TOTAL MAXIMUM INDIVIDUAL DOSE	73
6.6.5 POPULATION DOSES	73
6.7 LIQUID DOSE FACTOR EQUATIONS	76
6.7.1 WATER INGESTION	76
6.7.2 FISH INGESTION	76
6.7.3 SHORELINE RECREATION.....	76
TABLE 6.1 RECEPTORS FOR LIQUID DOSE CALCULATIONS.....	77
TABLE 6.2 RADIONUCLIDE DECAY AND STABLE ELEMENT TRANSFER DATA	78
TABLE 6.3 DOSE CALCULATION FACTORS	81
TABLE 6.4 INGESTION DOSE FACTORS.....	83
TABLE 6.5 BIOACCUMULATION FACTORS FOR FRESHWATER FISH.....	91
TABLE 6.6 EXTERNAL DOSE FACTORS FOR STANDING ON CONTAMINATED GROUND	92
FIGURE 6.1 LIQUID EFFLUENT RELEASE POINTS	94
FIGURE 6.2 LIQUID RADWASTE SYSTEM.....	95
SECTION 7.0 GASEOUS EFFLUENTS	97
RELEASE POINTS DESCRIPTION	97
7.1 INSTRUMENT SETPOINTS	98
7.1.1 Release Point Monitor Setpoints (1,2-RM-90-130, -131, 0-RM-90-118).....	98
7.1.1.1 Containment Purge Effluent Monitors (1,2-RM-90-130, -131).....	98
7.1.1.2 Waste Gas Decay Tank Effluent Monitor (0-RM-90-118)	98
7.1.2 Discharge Point Monitor Setpoints (1,2-RE-90-400, 0-RM-90-101, 0-RM-90-132, 1,2-RM-90-119).....	99
7.1.3 Discharge Point Effluent Monitor Default Setpoints	100
7.1.3.1 Shield Building Vents (1,2-RE-90-400), Auxiliary Building Vent (0-RM-90-101), and Service Building Vent (0-RM-90-132)	100
7.1.3.2 Condenser Vacuum Exhaust Vent (1,2-RM-90-119).....	100
7.2 GASEOUS EFFLUENTS - DOSE RATES	101
7.2.1 (Deleted).....	101
7.2.2 RELEASE SAMPLING.....	101
7.2.3 NOBLE GAS DOSE RATES.....	101
7.2.3.1 Total Body Dose Rate	101
7.2.3.2 Skin Dose Rate	102
7.2.4 I-131, I-133, TRITIUM AND ALL RADIONUCLIDES IN PARTICULATE FORM WITH HALF-LIVES OF GREATER THAN 8 DAYS - ORGAN DOSE RATE.....	103
7.3 DOSE - NOBLE GASES	104
7.3.1 Gamma dose to air.....	104

7.3.2 Beta dose to air.....	104
7.3.3 Cumulative Dose - Noble Gas.....	105
7.3.4 Comparison to Limits.....	105
7.4 DOSE DUE TO I-131, I-133, TRITIUM AND ALL RADIONUCLIDES IN PARTICULATE FORM WITH HALF-LIVES OF GREATER THAN 8 DAYS	106
7.4.1 Organ dose Calculation	106
7.4.2 Cumulative Doses	107
7.4.3 Comparison to Limits.....	107
7.5 DOSE PROJECTIONS	108
7.5.1 GASEOUS RADWASTE TREATMENT SYSTEM DESCRIPTION	108
7.6 QUARTERLY DOSE CALCULATIONS	109
7.6.1 NOBLE GAS - GAMMA AIR DOSE	109
7.6.2 NOBLE GAS - BETA AIR DOSE	109
7.6.3 RADIOIODINE, PARTICULATE AND TRITIUM - MAXIMUM ORGAN DOSE	110
7.6.4 POPULATION DOSES	111
7.6.5 REPORTING OF DOSES	112
7.6.6 DOSE TO A MEMBER OF THE PUBLIC INSIDE THE UNRESTRICTED AREA BOUNDARY	112
7.7 GASEOUS RELEASES - DOSE FACTORS	113
7.7.1 PASTURE GRASS-COW/GOAT-MILK INGESTION DOSE FACTORS	113
7.7.2 STORED FEED-COW/GOAT-MILK INGESTION DOSE FACTORS	114
7.7.3 PASTURE GRASS-BEEF INGESTION DOSE FACTORS	115
7.7.4 STORED FEED-BEEF INGESTION DOSE FACTORS	116
7.7.5 FRESH LEAFY VEGETABLE INGESTION DOSE FACTORS	117
7.7.6 STORED VEGETABLE INGESTION DOSE FACTORS	118
7.7.7 TRITIUM-PASTURE GRASS-COW/GOAT-MILK DOSE FACTOR	119
7.7.8 TRITIUM-STORED FEED-COW/GOAT-MILK DOSE FACTOR	119
7.7.9 TRITIUM-PASTURE GRASS-BEEF DOSE FACTOR	120
7.7.10 TRITIUM-STORED FEED-BEEF DOSE FACTOR	120
7.7.11 TRITIUM-FRESH LEAFY VEGETABLES DOSE FACTOR	121
7.7.12 TRITIUM-STORED VEGETABLES DOSE FACTOR	122
7.7.13 INHALATION DOSE FACTORS	122
7.7.14 GROUND PLANE DOSE FACTORS	122
7.8 DISPERSION METHODOLOGY	123
7.8.1 AIR CONCENTRATION	123
7.8.2 RELATIVE CONCENTRATION	124
7.8.3 RELATIVE DEPOSITION	124
TABLE 7.1 SQN - OFFSITE RECEPTOR LOCATION DATA	125
TABLE 7.2 JOINT PERCENTAGE FREQUENCIES OF WIND DIRECTION AND WIND SPEED FOR DIFFERENT STABILITY CLASSES*	126
TABLE 7.3 DOSE FACTORS FOR SUBMERSION IN NOBLE GASES	133
TABLE 7.4 SECTOR ELEMENTS CONSIDERED FOR POPULATION DOSES	134
TABLE 7.5 POPULATION WITHIN EACH SECTOR ELEMENT	135
TABLE 7.6 INHALATION DOSE FACTORS	136
FIGURE 7.1 GASEOUS EFFLUENT RELEASE POINTS	144
FIGURE 7.2 AUXILIARY AND SHIELD BUILDING VENTS (DETAIL)	145
FIGURE 7.3 GASEOUS RADWASTE TREATMENT SYSTEM	146
FIGURE 7.4 PLUME DEPLETION EFFECT FOR GROUND LEVEL RELEASES	147
FIGURE 7.5 VERTICAL STANDARD DEVIATION OF MATERIAL IN A PLUME	148
FIGURE 7.6 RELATIVE DEPOSITION FOR GROUND LEVEL RELEASES	149
SECTION 8.0 TOTAL DOSE	151

8.1 ANNUAL MAXIMUM INDIVIDUAL DOSES - TOTAL REPORTED DOSE.....	151
SECTION 9.0 RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM.....	153
9.1 MONITORING PROGRAM.....	153
9.2 DETECTION CAPABILITIES.....	153
9.3 LAND USE CENSUS.....	153
9.4 INTERLABORATORY COMPARISON PROGRAM.....	153
TABLE 9.1 RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM.....	154
TABLE 9.2 ENVIRONMENTAL RADIOLOGICAL MONITORING PROGRAM SAMPLING LOCATIONS	158
TABLE 9.3 THERMOLUMINESCENT DOSIMETRY LOCATIONS.....	159
FIGURE 9.1 ENVIRONMENTAL MONITORING LOCATIONS WITHIN ONE MILE OF THE PLANT.....	161
FIGURE 9.2 ENVIRONMENTAL MONITORING LOCATIONS FROM ONE TO FIVE MILES FROM THE PLANT.....	162
FIGURE 9.3 ENVIRONMENTAL MONITORING LOCATIONS GREATER THAN FIVE MILES FROM THE PLANT.....	163

INTRODUCTION

The Sequoyah Nuclear Plant (SQN) Offsite Dose Calculation Manual (ODCM) is a supporting document of the SQN Technical Specifications. The ODCM is divided into two major parts. The first part of the ODCM contains: 1) Radioactive Effluent Controls required by Section 6.8.4.f of the SQN Technical Specifications; 2) Radiological Environmental Monitoring Controls required in Section 6.8.4.g of the SQN Technical Specifications; 3) descriptions of the information that should be included in the Annual Radiological Environmental Operating and Annual Radioactive Effluent Release Reports required by SQN Technical Specifications 6.9.1.6 and 6.9.1.8; and, 4) Administrative Controls for the ODCM requirements.

35

35

The second part of the ODCM contains the methodologies used to: 1) calculate offsite doses resulting from radioactive gaseous and liquid effluents; 2) calculate gaseous and liquid effluent monitor Alarm/Trip setpoints; and, 3) conduct the Environmental Radiological Monitoring Program.

The SQN ODCM will be maintained for use as a reference guide on accepted methodologies and calculations. Changes in the calculation methods or parameters will be incorporated into the ODCM in order to assure that the ODCM represents the present methodology in all applicable areas. Any licensee initiated ODCM changes will be implemented in accordance with SQN Technical Specification 6.14 and ODCM Administrative Control 5.3.

SECTIONS 1.0 AND 2.0
CONTROLS AND
SURVEILLANCE REQUIREMENTS

1/2 CONTROLS AND SURVEILLANCE REQUIREMENTS

1/2.0 APPLICABILITY

CONTROLS

- 1.0.1 Compliance with the Controls contained in the succeeding controls is required during the OPERATIONAL MODES or other conditions specified therein; except that upon failure to meet the Control, the associated ACTION requirements shall be met.
- 1.0.2 Noncompliance with a Control shall exist when the requirements of the Control and associated ACTION requirements are not met within the specified time intervals. If the Control is restored prior to the expiration of the specified intervals, completion of the ACTION requirements is not required.
- 1.0.3 When a Control is not met, except as provided in the associated ACTION requirements, within 1 hour action shall be initiated to place the unit in a MODE in which the Control does not apply by placing it, as applicable, in:
 - a. At least HOT STANDBY within the next 6 hours,
 - b. At least HOT SHUTDOWN within the following 6 hours, and
 - c. At least COLD shutdown within the subsequent 24 hours.
- 1.0.4 Entry into an OPERATIONAL MODE or other specified condition shall not be made when the conditions for the Control are not met and the associated ACTION requires a shutdown if they are not met within a specified time interval. Entry into an OPERATIONAL MODE or specified condition may be made in accordance with ACTION requirements when conformance to them permits continued operation of the facility for an unlimited period of time. This provision shall not prevent passage through or to OPERATIONAL MODES as required to comply with the ACTION requirements. Exceptions to these requirements are stated in the individual Controls.

1/2 CONTROLS AND SURVEILLANCE REQUIREMENTS

1/2.0 APPLICABILITY

SURVEILLANCE REQUIREMENTS

- 2.0.1 Surveillance Requirements shall be met during the OPERATIONAL MODES or other conditions specified for individual Controls unless otherwise stated in the individual Surveillance Requirement.
- 2.0.2 Each Surveillance Requirement shall be performed within the specified time interval with a maximum allowable extension not to exceed 25% of the specified surveillance interval.
- 2.0.3 Failure to perform a Surveillance Requirement within the specified time interval shall constitute a failure to meet the OPERABILITY requirements for a Control. The time limits of the ACTION requirements are applicable at the time it is identified that a Surveillance Requirement has not been performed. The ACTION requirements may be delayed for up to 24 hours to permit the completion of the surveillance when the allowable outage time limits of the ACTION requirements are less than 24 hours. Surveillance Requirements do not have to be performed on inoperable equipment.
- 2.0.4 Entry into an OPERATIONAL MODE or other specified applicable condition shall not be made unless the Surveillance Requirement(s) associated with the Control has been performed within the applicable surveillance interval or as otherwise specified. This provision shall not prevent passage through or to OPERATIONAL MODES as required to comply with ACTION requirements. Exceptions to these requirements are stated in the individual Controls.

1/2 CONTROLS AND SURVEILLANCE REQUIREMENTS

1/2.1 INSTRUMENTATION

1/2.1.1 RADIOACTIVE LIQUID EFFLUENT MONITORING INSTRUMENTATION

CONTROLS

- 1.1.1 In accordance with SQN Technical Specification 6.8.4.f.1, the radioactive liquid effluent monitoring instrumentation channels shown in Table 1.1-1 shall be OPERABLE with their alarm/trip setpoints set to ensure that the limits of ODCM Control 1.2.1.1 are not exceeded. The alarm/trip setpoints of these channels shall be determined in accordance with the methodology and parameters in ODCM Section 6.2.

35

APPLICABILITY: This requirement is applicable during all releases via these pathways.

ACTION:

- a. With a radioactive liquid effluent monitoring instrumentation channel alarm/trip setpoint less conservative than required above, without delay suspend the release of radioactive liquid effluents monitored by the affected channel or declare the channel inoperable, or change the setpoint so that it is acceptably conservative.
- b. With less than the minimum number of radioactive liquid effluent monitoring instrumentation channels OPERABLE, take the action shown in Table 1.1-1. Exert best effort to return the instruments to OPERABLE status within 30 days and, if unsuccessful, explain in the next Annual Effluent Release Report why the inoperability could not be corrected within 30 days.
- c. The provisions of Controls 1.0.3 and 1.0.4 are not applicable. Report all deviations in the Annual Effluent Release Report.

SURVEILLANCE REQUIREMENTS

- 2.1.1 Each radioactive liquid effluent monitoring channel shall be demonstrated OPERABLE by performance of the CHANNEL CHECK, CHANNEL CALIBRATION, and CHANNEL FUNCTIONAL TEST operations at the frequencies shown in Table 2.1-1.

Table 1.1-1 RADIOACTIVE LIQUID EFFLUENT MONITORING INSTRUMENTATION
(Page 1 of 2)

	Instrument	Minimum Channels OPERABLE	Action
1.	Gross Radioactivity Monitors Providing Automatic Termination of Release		
	a. Liquid Radwaste Effluent Line (0-RM-90-122A)	1	30
	b. Steam Generator Blowdown Effluent Line (1,2-RM-90-120A,121A)	1	31
	c. Condensate Demineralizer Effluent Line (0-RM-90-225A)	1	30
2.	Gross Radioactivity Monitors Providing Automatic Termination of Release		
	a. Essential Raw Cooling Water Effluent Header** (0-RM-90-133A,-134A,-140A,-141A)	1	32
	b. Turbine Building Sump Effluent Line (0-RM-90-212A (LOCAL))	1	32
3.	Flow Rate Measurement Devices		
	a. Liquid Radwaste Effluent Line (0-FI-77-42)	1	33
	b. Steam Generator Blowdown Effluent Line (1,2-FI-15-44, 1,2-FR-15-25, 1,2-F-15-43)	1	33
	c. Condensate Demineralizer Effluent Line (0-FR-14-456, 0-F-14-185, 0-F-14-192)	1	33
	d. Cooling Tower Blowdown Effluent Line (0-FT-27-175 or 0-LS-27-225))	1	33
4.	Tank Level Indicating Devices		
	a. Condensate Storage Tank (0-L-2-230, 0-L-2-233)	1	34
	b. Steam Generator Layup Tank* (LOCAL FLOAT)	1	34
5.	Continuous Composite Sampler and Sample Flow Monitor		
	a. Condensate Demineralizer Regenerant Effluent Line (0-FI-14-466)	1	35

*Required when connected to the secondary system

** Requires minimum of 1 Channel/Header to be OPERABLE.

Table 1.1-1 RADIOACTIVE LIQUID EFFLUENT MONITORING INSTRUMENTATION
(Page 2 of 2) TABLE NOTATION

ACTION 30 - With the number of channels OPERABLE less than required by the Minimum Channels OPERABLE requirement, effluent releases may continue provided that prior to initiating a release:

- a. At least two independent samples are analyzed in accordance with ODCM Control 2.2.1.1, and
- b. At least two technically qualified members of the Facility Staff independently verify the release rate calculations and discharge line valving;

Otherwise, suspend release of radioactive effluents via this pathway.

ACTION 31 - With the number of channels OPERABLE less than required by the Minimum Channels OPERABLE requirement, effluent releases via this pathway may continue provided grab samples are analyzed for gross radioactivity gamma at a limit of detection of at least 10^{-7} $\mu\text{Ci/g}$:

- a. At least once per 12 hours when the specific activity of the secondary coolant is greater than or equal to 0.01 $\mu\text{Ci/g}$ DOSE EQUIVALENT I-131.
- b. At least once per 24 hours when the specific activity of the secondary coolant is less than or equal to 0.01 $\mu\text{Ci/g}$ DOSE EQUIVALENT I-131.

ACTION 32 - With the number of channels OPERABLE less than required by the Minimum Channels OPERABLE requirement, effluent releases via this pathway may continue provided that, at least once per 12 hours, grab samples are collected and analyzed for gross radioactivity gamma at a limit of detection of at least 10^{-7} $\mu\text{Ci/ml}$.

ACTION 33 - With the number of channels OPERABLE less than required by the Minimum Channels OPERABLE requirement, effluent releases via this pathway may continue provided the flow rate is estimated at least once per 4 hours during actual releases. Pump curves may be used to estimate flow.

ACTION 34 - With the number of channels OPERABLE less than required by the Minimum Channels OPERABLE requirement, liquid additions to this tank may continued provided the tank liquid level is estimated during all liquid additions to the tank.

ACTION 35 - With the number of channels OPERABLE less than required by the Minimum Channels OPERABLE requirement, effluent releases via this pathway may continue provided representative batch samples of each tank to be released are taken prior to release and composited for analysis according to Table 2.2-1, footnote g.

Table 2.1-1 - RADIOACTIVE LIQUID EFFLUENT MONITORING INSTRUMENTATION
SURVEILLANCE REQUIREMENTS
(Page 1 of 2)

Instrument	CHANNEL CHECK	SOURCE/ SENSOR CHECK	CHANNEL CALIBRA- TION	CHANNEL FUNCTIONAL TEST
1. GROSS BETA OR GAMMA RADIOACTIVITY MONITORS PROVIDING ALARM AND AUTOMATIC TERMINATION OF RELEASE				
a. Liquid Radwaste Effluent Line (0-RM-90-122A)	D	P	R(3)	Q(1)
b. Steam Generator Blowdown Effluent Line (1,2-RM-90-120A,121A)	D	M	R(3)	Q(5)
c. Condensate Demineralizer Effluent Line (0-RM-90-225A)	D	M	R(3)	Q(5)
2. GROSS BETA OR GAMMA RADIOACTIVITY MONITORS PROVIDING ALARM BUT NOT PROVIDING AUTOMATIC TERMINATION OF RELEASE				
a. Essential Raw Cooling Water Effluent Line (0-RM-90-133A,134A,140A,141A)	D		R(3)	Q(2)
b. Turbine Building Sump Effluent Line (0-RM-90-212A (LOCAL))	D	M	R(3)	Q(2)
3. FLOW RATE MEASUREMENT DEVICES				
a. Liquid Radwaste Effluent Line (0-FI-77-42)	D(4)	N.A.	R	Q
b. Steam Generator Blowdown Effluent Line (1,2-FI-15-44,1,2-FR-15-25, 1,2-F-5-43)	D(4)	N.A.	R	Q
c. Condensate Demineralizer Effluent Line (0-FR-14-456,0-F-14-192, 0-F-14-185)	D(4)	N.A.	R	Q
d. Cooling Tower Blowdown Effluent Line (0-FT-27-175, 0-L-27-225)	D(4)	N.A.	R	Q
4. TANK LEVEL INDICATING DEVICES				
a. Condensate Storage Tank (0-LI-2-230, 0-L-2-233)	D*	N.A.	R	Q
b. Steam Generator Layup Tank (LOCAL FLOAT)	D*	N.A.	R	N.A.
5. CONTINUOUS COMPOSITE SAMPLER AND SAMPLE FLOW MONITOR				
a. Condensate Demineralizer Regenerant Effluent Line (0-FI-14-466)	P	N.A.	R	N.A.

| 34
| 34
| 34

| 34
| 34

| 34
| 34
| 34

Table 2.1-1 RADIOACTIVE LIQUID EFFLUENT MONITORING INSTRUMENTATION
SURVEILLANCE REQUIREMENTS
(Page 2 of 2) TABLE NOTATION

- * During liquid additions to the tank.
 - (1) The CHANNEL FUNCTIONAL TEST shall also demonstrate that automatic isolation of this pathway and control room alarm annunciation occurs if any of the following conditions exists:
 - 1. Instrument indicates measured levels above the alarm/trip setpoint.
 - 2. Circuit failure.
 - 3. Downscale failure.
 - (2) The CHANNEL FUNCTIONAL TEST shall also demonstrate that control room alarm annunciation occurs if any of the following conditions exists:
 - 1. Instrument indicates measured levels above the alarm setpoint.
 - 2. Circuit failure.
 - 3. Downscale failure.
 - (3) The initial CHANNEL CALIBRATION shall be performed using one or more of the reference standards certified by the National Bureau of Standards or using standards that have been obtained from suppliers that participate in measurement assurance activities with NBS. These standards shall permit calibrating the system over its intended range of energy and measurement range. For subsequent CHANNEL CALIBRATION, sources that have been related to the initial calibration shall be used.
 - (4) CHANNEL CHECK shall consist of verifying indication of flow during periods of release. CHANNEL CHECK shall be made at least once per 24 hours on days on which continuous periodic, or batch releases are made.
 - (5) The CHANNEL FUNCTIONAL TEST shall also demonstrate that automatic isolation of this pathway and control room alarm annunciation occurs if any of the following conditions occur:
 - 1. Instrument indicates measured levels above the alarm/trip setpoint.
 - 2. Circuit failure.
- The CHANNEL FUNCTIONAL TEST shall also demonstrate that control room annunciation occurs if the following condition occurs:
- 1. Downscale failure.

1/2 CONTROLS AND SURVEILLANCE REQUIREMENTS

1/2.1 INSTRUMENTATION

1/2.1.2 RADIOACTIVE GASEOUS EFFLUENT MONITORING INSTRUMENTATION

CONTROLS

- 1.1.2 In accordance with SQN Technical Specification 6.8.4.f.1, the radioactive gaseous effluent monitoring instrumentation channels shown in Table 1.1-2 shall be OPERABLE with their alarm/trip setpoints set to ensure that the limits of ODCM Control 1.2.2.1 are not exceeded. The alarm/trip setpoints of these channels shall be determined in accordance with the methodology and parameters in ODCM Section 7.1.

| 35

APPLICABILITY: As shown in Table 1.1-2.

ACTION:

- a. With a radioactive gaseous effluent monitoring instrumentation channel alarm/trip setpoint less conservative than required above, without delay suspend the release of radioactive gaseous effluents monitored by the affected channel, declare the channel inoperable, or change the setpoint so it is acceptably conservative.
- b. With less than the minimum number of radioactive gaseous effluent monitoring instrumentation channels OPERABLE take the action shown in Table 1.1-2. Exert best efforts to return the instruments to OPERABLE status within 30 days and, if unsuccessful, explain in the next Annual Effluent Report why the inoperability could not be corrected within 30 days.
- c. The provisions of Controls 1.0.3 and 1.0.4 are not applicable. Report all deviations in the Annual Effluent Release Report.

SURVEILLANCE REQUIREMENTS

- 2.1.2 Each radioactive gaseous effluent monitoring instrumentation channel shall be demonstrated OPERABLE by performance of the CHANNEL CHECK, SOURCE CHECK, CHANNEL CALIBRATION, and CHANNEL FUNCTIONAL TEST operations at the frequencies shown in Table 2.1-2.

Table 1.1-2 RADIOACTIVE GASEOUS EFFLUENT MONITORING INSTRUMENTATION
(Page 1 of 2)

	Instrument	Minimum Channels OPERABLE	Applicability	Action
1.	WASTE GAS DISPOSAL SYSTEM			
	a. Noble Gas Activity Monitor (0-RM-90-118A)	1	***	40
	b. Effluent System Flow Rate Measuring Device (0-FI-77-230)	1	***	41
2.	CONDENSER VACUUM EXHAUST SYSTEM			
	a. Noble Gas Activity Monitor (1,2-RM-90-119)	1	***	42
	b. Flow Rate Monitor (1,2-F-2-256,257) (1,2-FI-2-101,148,191)	1	***	41
3.	SHIELD BUILDING EXHAUST SYSTEM			
	a. Noble Gas Activity Monitor (1,2-RE-90-400A (Low Range))	1**	***	43
	b. Iodine Sampler (1,2-RE-90-402)	1	***	44
	c. Particulate Sampler (1,2-RE-90-402)	1	***	44
	d. Flow Rate Monitor (1,2-FI-90-400)	1**	***	41,43
	e. Sampler Flow Rate Monitor (1,2-RI-90-400 or 1,2-FI-90-400A)	1	***	41
4.	AUXILIARY BUILDING VENTILATION SYSTEM			
	a. Noble Gas Activity Monitor (0-RM-90-101B)	1	*	42
	b. Iodine Sampler (0-RE-90-101)	1	*	44
	c. Particulate Sampler (0-RE-90-101)	1	*	44
	d. Flow Rate Monitor (0-F-30-5174A)	1	*	41
	e. Sampler Flow Rate Monitor (0-FIS-90-101)	1	*	41
5.	SERVICE BUILDING VENTILATION SYSTEM			
	a. Noble Gas Activity Monitor (0-RE-90-132B)	1	*	42
	b. Flow Rate Monitor (0-F-90-5132A)	1	*	41

35

35

35

35

34

34

35

34

Table 1.1-2 RADIOACTIVE GASEOUS EFFLUENT MONITORING INSTRUMENTATION
(Page 2 of 2) TABLE NOTATION

- * At all times.
- ** Operability of shield building noble gas activity monitor requires both flow rate and radiation inputs since the high radiation alarm is only on the effluent channel ($\mu\text{Ci/s}$).
- *** During exhaust system operation.

35

ACTION 40 - With the number of channels OPERABLE less than required by the Minimum Channels OPERABLE requirement, the contents of the tank(s) may be released to the environment provided that prior to initiating the release:

- a. At least two independent samples of the tank's contents are analyzed, and
- b. At least two technically qualified members of the Facility Staff independently verify the release rate calculations and discharge valve lineup;

Otherwise, suspend release of radioactive effluents via this pathway.

ACTION 41 - With the number of channels OPERABLE less than required by the Minimum Channels OPERABLE requirement, effluent releases via this pathway may continue provided the flow rate is estimated at least once per 4 hours.

ACTION 42 - With the number of channels OPERABLE less than required by the Minimum Channels OPERABLE requirement, effluent releases via this pathway may continue provided grab samples are taken at least once per 12 hours and these samples are analyzed for noble gas gross activity within 24 hours.

ACTION 43 - Flow Rate Inoperable - With any inoperable flow element on a discharge pathway where a fan is operating (Purge A, Purge B, ABGTS, or EGTS), effluent release may continue provided: (a) "Low Rng" on RI-90-400 is selected instead of "Eff"; and (b) at least once per 12 hours associated instrument malfunction is verified not annunciated; and (c) a reading from "Low Rng" on RI-90-400 is obtained at least once per 24 hours.

Radiation Monitor Inoperable - With the low range channel inoperable, effluent releases may continue provided grab samples are taken at least once per 12 hours and these samples are analyzed for noble gas gross activity within 24 hours.

35

ACTION 44 - With the number of channels OPERABLE less than required by the Minimum Channels OPERABLE requirement, effluent releases via the affected pathway may continue provided that within 4 hours after the channel has been declared inoperable samples are continuously collected with auxiliary sampling equipment as required in Table 2.2-2.

Table 2.1-2 RADIOACTIVE GASEOUS EFFLUENT MONITORING INSTRUMENTATION
SURVEILLANCE REQUIREMENTS
(Page 1 of 2)

Instrument	CHANNEL CHECK	SOURCE/ SENSOR CHECK	CHANNEL CALIBRA- TION	CHANNEL FUNCTIONAL TEST	MODE in Which Surveil- lance Required
1. WASTE GAS DISPOSAL SYSTEM					
a. Noble Gas Activity Monitor (0-RM-90-118A)	P	P	R(3)	Q(1)	*
b. Flow Rate Monitor (0-FI-77-230)	D	N.A.	R	Q	****
2. CONDENSER VACUUM EXHAUST SYSTEM					
a. Noble Gas Activity Monitor (1,2-RM-90-119)	D	M(4)	R(3)	Q(2)	*
b. Flow Rate Monitor (1,2-F-2-256,257, 1,2-FI-2-101,148,191)	D	N.A.	R	Q	*
3. SHIELD BUILDING EXHAUST SYSTEM					
a. Noble Gas Activity Monitor (1,2-RE-90-400A (Low Range))	D	M	R(3)	Q(2)	***
b. Iodine Sampler (1,2-RE-90-402)	W	N.A.	N.A.	N.A.	***
c. Particulate Sampler (1,2-RE-90-402)	W	N.A.	N.A.	N.A.	***
d. Flow Rate Monitor (1,2-FI-90-400,)	D	N.A.	R	Q	***
e. Sampler Flow Rate Monitor (1,2-FI-90-400 or 1,2-FI-90-400A)	D	N.A.	R	Q	***
4. AUXILIARY BUILDING VENTILATION SYSTEM					
a. Noble Gas Activity Monitor (0-RM-90-101B)	D	M	R(3)	Q(2)	*
b. Iodine Sampler (0-RE-90-101)	W	N.A.	N.A.	N.A.	*
c. Particulate Sampler (0-RE-90-101)	W	N.A.	N.A.	N.A.	*
d. Flow Rate Monitor (0-F-30-5174A)	D	N.A.	R	Q	*
e. Sampler Flow Rate Monitor (0-FIS-90-101)	D	N.A.	R	Q	*
5. SERVICE BUILDING VENTILATION SYSTEM					
a. Noble Gas Activity Monitor (0-RE-90-132B)	D	M	R(3)	Q(2)	*
b. Flow Rate Monitor (0-F-90-5132A)	D	N.A.	R	Q	*

34

34

34

35

34

34

34

Table 2.1-2 RADIOACTIVE GASEOUS EFFLUENT MONITORING INSTRUMENTATION
SURVEILLANCE REQUIREMENTS
(Page 2 of 2) TABLE NOTATION

- * At all times.
 - *** During shield building exhaust system operation.
 - **** During waste gas releases.
- (1) The CHANNEL FUNCTIONAL TEST shall also demonstrate that automatic isolation of this pathway and control room alarm annunciation occurs if any of the following conditions exists:
- 1. Instrument indicates measured levels above the alarm/trip setpoint.
 - 2. Circuit failure.
 - 3. Downscale failure.
- (2) The CHANNEL FUNCTION TEST shall also demonstrate that control room alarm annunciation occurs if any of the following conditions exists:
- 1. Instrument indicates measured levels above the alarm setpoint.
 - 2. Circuit failure.
 - 3. Downscale failure.
- For the auxiliary building ventilation system, at least once every 18 months, the CHANNEL FUNCTIONAL TEST shall also demonstrate automatic isolation of this pathway if the following condition exists:
- Instrument indicates measured levels above the alarm/trip setpoint.
- (3) The initial CHANNEL CALIBRATION shall be performed using one or more of the reference standards certified by the National Bureau of Standards or using standards that have been obtained from suppliers that participate in measurement assurance activities with NBS. These standards shall permit calibrating the system over its intended range of energy and measurement range. For subsequent CHANNEL CALIBRATION, sources that have been related to the initial calibration shall be used.
- (4) The SOURCE/SENSOR CHECK for the Condenser Vacuum Exhaust Monitor will be accomplished using an LED sensor check source in lieu of a radioactive source.

1/2 CONTROLS AND SURVEILLANCE REQUIREMENTS

1/2.2 RADIOACTIVE EFFLUENTS

1/2.2.1 LIQUID EFFLUENTS

1/2.2.1.1 CONCENTRATION

CONTROLS

- 1.2.1.1 In accordance with SQN Technical Specifications 6.8.4.f.2 and 3, the concentration of radioactive material released to UNRESTRICTED AREAS (see Figure 3.1) shall be limited at all times to ten times the concentrations specified in 10 CFR Part 20, Appendix B, Table 2, Column 2 for radionuclides other than dissolved or entrained noble gases. For dissolved or entrained noble gases, the concentration shall be limited to 2×10^{-4} $\mu\text{Ci/ml}$ total activity.

| 35

| 32

A PLICABILITY: At all times.

ACTION:

- a. With the concentration of radioactive material released to UNRESTRICTED AREAS exceeding the above limits, without delay, restore the concentration to within the above limits.
- b. If samples or analyses required by Table 2.2-1 are not performed, report these in the next Annual Radioactive Effluent Release Report with an explanation why they were missed and what actions were taken to prevent reoccurrence.
- c. The provisions of Controls 1.0.3 and 1.0.4 are not applicable.

SURVEILLANCE REQUIREMENTS

- 2.2.1.1.1 Radioactive liquid wastes shall be sampled and analyzed according to the sampling and analysis program of Table 2.2-1.
- 2.2.1.1.2 The results of the radioactivity analysis shall be used in accordance with the methods in ODCM Section 6.1 to assure that the concentration at the point of release is maintained within the limits stated above.

Table 2.2-1 RADIOACTIVE LIQUID WASTE SAMPLING AND ANALYSIS PROGRAM
(Page 1 of 3)

Liquid Release Type	Sampling Frequency	Minimum Analysis Frequency	Type of Activity Analysis	Lower Limit of Detection (LLD) ($\mu\text{Ci/ml}$) ^a
A. Batch Waste Release Tanks^d	P	P	Principal Gamma Emitters	5×10^{-7}
1. Waste Condensate Tanks (3)	Each Batch	Each Batch		
2. Cask Decontamination Tank			I-131	1×10^{-6}
3. Laundry Tanks (2)	P	M	Dissolved/	1×10^{-5}
4. Chemical Drain Tank	One Batch/M		Entrained Gases (Gamma Emitters)	
5. Monitor Tank				
6. Distillate Tanks (2)			H-3	1×10^{-5}
7. Condensate Demineralizer Waste Evaporator Tank	P	M	Gross Alpha	1×10^{-7}
	Each Batch	Composite ^b		
	P	Q	Sr-89, Sr-90	5×10^{-6}
	Each Batch	Composite ^b	Fe-55	1×10^{-6}
B. Continuous Releases^e	D	W	Principal Gamma Emitters ^f	5×10^{-7}
1. Steam Generator Blowdown ^h	Grab Sample	Composite ^c		
2. Turbine Building Sump ^h	M	M	I-131	1×10^{-6}
	Grab Sample		Dissolved/	1×10^{-5}
			Entrained Gases (Gamma Emitters)	
	D	M	H-3	1×10^{-5}
	Grab Sample	Composite ^c	Gross Alpha	1×10^{-7}
	D	Q	Sr-89, Sr-90	5×10^{-6}
	Grab Sample	Composite ^c	Fe-55	1×10^{-6}
C. Periodic Continuous Releases^{e,h}	Continuous ^g	W	Principal Gamma Emitters	5×10^{-7}
1. Non-Reclaimable Waste Tank		Composite ^c		
2. High Crud Tanks (2)	M ^g	M	I-131	1×10^{-6}
3. Neutralizer Tank	Grab Sample		Dissolved/	1×10^{-5}
			Entrained Gases (Gamma Emitters)	
	Continuous ^g	M	H-3	1×10^{-5}
		Composite ^c	Gross Alpha	1×10^{-7}
	Continuous ^g	Q	Sr-89, Sr-90	5×10^{-6}
		Composite ^c	Fe-55	1×10^{-6}

Table 2.2-1 RADIOACTIVE LIQUID WASTE SAMPLING AND ANALYSIS PROGRAM
(Page 2 of 3) TABLE NOTATION

- a The LLD is defined for the purpose of these specifications as the smallest concentration of radioactive material in a sample that will yield a net count above system background that will be detected with 95% probability with only a 5% probability of falsely concluding that a blank observation represents a "real" signal.

For a particular measurement system (which may include radiochemical separation):

$$LLD = \frac{4.66s_b}{E V 2.22 \times 10^6 Y \exp(-\lambda \Delta t)}$$

Where:

LLD is the "a priori" lower limit of detection as defined above in microcurie per unit mass or volume,
 s_b is the standard deviation of the background counting rate or of the counting rate of a blank sample as appropriate (as counts per minute),
 E is the counting efficiency as counts per disintegration,
 V is the sample size in units of mass or volume,
 2.22×10^6 is the number of disintegrations per minute per microcurie,
 Y is the fractional radiochemical yield (when applicable),
 λ is the radioactive decay constant for the particular radionuclide, and
 Δt for plant effluents is the elapsed time between midpoint of sample collection and time of counting (midpoint).

It should be recognized that the LLD is defined as an a priori (before the fact) limit representing the capability of a measurement system and not an a posteriori (after the fact) limit for a particular measurement.

| 35

- b A composite sample is one in which the quantity of liquid sampled is proportional to the quantity of liquid waste discharged and in which the method of sampling employed results in a specimen which is representative of the liquids released.
- c Prior to analyses, all samples taken for the composite shall be thoroughly mixed in order for the composite sample to be representative of the effluent release.

Table 2.2-1 RADIOACTIVE LIQUID WASTE SAMPLING AND ANALYSIS PROGRAM
(Page 3 of 3) TABLE NOTATION

- d A batch release is the discharge of liquid wastes of a discrete volume. Prior to sampling for analyses, each batch shall be isolated, and then thoroughly mixed, by the method described in ODCM Section 6.1.1, to assure representative sampling.
- e A continuous release is the discharge of liquid wastes of a nondiscrete volume; e.g., from a volume or system that has an input flow during the continuous release.
- f The principal gamma emitters for which the LLD specification applies exclusively are the following radionuclides: Mn-54, Fe-59, Co-58, Co-60, Zn-65, Mo-99, Cs-134, Cs-137, Ce-141. Ce-144 shall also be measured with an LLD of 5×10^{-6} . This list does not mean that only these nuclides are to be detected and reported. Other peaks which are measurable and identifiable, together with the above nuclides, shall also be identified and reported.
- g Releases from these tanks are continuously composited during releases. With the composite sampler or the sampler flow monitor inoperable, the sampling frequency shall be changed to require representative batch samples from each tank to be released to be taken prior to release and manually composite for these analyses.
- h Applicable only during periods of primary to secondary leakage or the release of radioactivity as detected by the effluent radiation monitor provided the radiation monitor setpoint is at a LLD of $\leq 1 \times 10^{-6}$ $\mu\text{Ci/ml}$ and allowing for background radiation during periods when primary to secondary leakage is not occurring.

1/2 CONTROLS AND SURVEILLANCE REQUIREMENTS

1/2.2 RADIOACTIVE EFFLUENTS

1/2.2.1 LIQUID EFFLUENTS

1/2.2.1.2 DOSE

CONTROLS

1.2.1.2 In accordance with SQN Technical Specification 6.8.4.f.4 and 5, the dose or dose commitment to a MEMBER OF THE PUBLIC from radioactive materials in liquid effluents released to UNRESTRICTED AREAS shall be limited from each reactor unit:

| 35

- a. During any calendar quarter to less than or equal to 1.5 mrem to the total body and to less than or equal to 5 mrem to any organ, and
- b. During any calendar year to less than or equal to 3 mrem to the total body and to less than or equal to 10 mrem to any organ.

APPLICABILITY: At all times.

ACTION:

- a. With the calculated dose from the release of radioactive materials in liquid effluents exceeding any of the above limits, prepare and submit to the Commission within 30 days, pursuant to ODCM Administrative Control 5.4, a Special Report which identifies the cause(s) for exceeding the limit(s) and defines the corrective actions that have been taken to reduce the releases and the proposed corrective actions to be taken to assure that subsequent releases will be in compliance with the above limits. This Special Report shall also include (1) the results of radiological analyses of the drinking water source and (2) the radiological impact on finished drinking water supplies with regard to the requirements of 40 CFR 141 (applicable only if drinking water supply is taken from the receiving water body within three miles downstream of the plant discharge).
- b. The provisions of Controls 1.0.3 and 1.0.4 are not applicable.

SURVEILLANCE REQUIREMENTS

- 2.2.1.2 Cumulative dose contributions from liquid effluents for the current calendar quarter and current calendar year shall be determined in accordance with the methodology and parameters in ODCM Section 6.3 at least once per 31 days.

1/2 CONTROLS AND SURVEILLANCE REQUIREMENTS

1/2.2 RADIOACTIVE EFFLUENTS

1/2.2.1 LIQUID EFFLUENTS

1/2.2.1.3 LIQUID RADWASTE TREATMENT SYSTEM

CONTROLS

1.2.1.3 In accordance with SQN Technical Specification 6.8.4.f.6, the liquid radwaste treatment system shall be used to reduce the radioactive materials in liquid wastes prior to their discharge when the projected doses due to the liquid effluent to UNRESTRICTED AREAS (see Figure 3.1) would exceed 0.06 mrem per reactor unit to the total body or 0.2 mrem per reactor unit to any organ in a 31-day period.

| 35

APPLICABILITY: At all times.

ACTION:

- a. With radioactive liquid waste being discharged without treatment and in excess of the above limits, prepare and submit to the Nuclear Regulatory Commission within 30 days pursuant to ODCM Administrative Control 5.4, a Special Report which includes the following information:
 1. Identification of the inoperable equipment or subsystems and the reason for inoperability,
 2. Action(s) taken to restore the inoperable equipment to OPERABLE status, and
 3. Summary description of action(s) taken to prevent a recurrence.
- b. The provisions of Controls 1.0.3 and 1.0.4 are not applicable.

SURVEILLANCE REQUIREMENTS

2.2.1.3 Doses due to liquid releases from each unit to UNRESTRICTED AREAS shall be projected at least once per 31 days, in accordance with the methodology and parameters in ODCM Section 6.5.

1/2 CONTROLS AND SURVEILLANCE REQUIREMENTS

1/2.2 RADIOACTIVE EFFLUENTS

1/2.2.2 GASEOUS EFFLUENTS

1/2.2.2.1 DOSE RATE

CONTROLS

- | | | |
|---|----|----|
| 1.2.2.1 In accordance with SQN Technical Specification 6.8.4.1.7, the dose rate at any time due to radioactive materials released in gaseous effluents to areas at or beyond the UNRESTRICTED AREA BOUNDARY (see Figure 3.1) shall be limited to the following: | 32 | 35 |
| a. For noble gases: Less than or equal to a <i>dose rate of 500 mrem/yr</i> to the total body and less than or equal to a <i>dose rate of 3000 mrem/yr</i> to the skin, and | 32 | |
| b. For Iodine-131, Iodine-133, tritium, and for all radionuclides in particulate form with half-lives greater than 8 days: Less than or equal to a <i>dose rate of 1500 mrem/yr</i> to any organ. | 32 | |

APPLICABILITY: At all times.

ACTION:

- With dose rate(s) exceeding the above limits, without delay restore the release rate to within the above limit(s).
- If samples or analyses required by Table 2.2-2 are not performed, report these in the next Annual Radioactive Effluent Release Report with an explanation why they were missed and what actions were taken to prevent reoccurrence.
- The provisions of Controls 1.0.3 and 1.0.4 are not applicable.

SURVEILLANCE REQUIREMENTS

- 2.2.2.1.1 The dose rate due to noble gases in gaseous effluents shall be determined to be within the above limits in accordance with the methodology and parameters in ODCM Section 7.2.3, and
- 2.2.2.1.2 The dose rate due to Iodine-131, Iodine-133, tritium, and for all radionuclides in particulate form with half-lives greater than 8 days in gaseous effluents shall be determined to be within the above limits in accordance with the methodology and parameters in ODCM Section 7.2.4 and by obtaining representative samples and performing analyses in accordance with the sampling and analysis program specified in Table 2.2-2.

Table 2.2-2 RADIOACTIVE GASEOUS WASTE MONITORING SAMPLING AND ANALYSIS
PROGRAM
(Page 1 of 3)

Gaseous Release Type	Sampling Frequency	Minimum Analysis Frequency	Type of Activity Analysis	Lower Limit of Detection (LLD) ($\mu\text{Ci/ml}$) ^a
A. Waste Gas Storage Tank	P Each Tank Grab	P Each Tank	Principal Gamma Emitters ^g	1×10^{-4}
B. Containment				
1. PURGE	P ⁱ Each PURGE Grab Sample	D ⁱ Each PURGE	Principal Gamma Emitters ^g H-3	1×10^{-4} 1×10^{-6}
2. Vent	W ⁱ Grab Sample	W ⁱ	Principal Gamma Emitters ^g H-3	1×10^{-4} 1×10^{-6}
C. Noble Gases and Tritium	M Grab Sample	M	Principal Gamma Emitters ^g H-3	1×10^{-4} 1×10^{-6}
1. Condenser Vacuum Exhaust ^h				
2. Auxiliary Building Exhaust ^{b,e}				
3. Service Bldg. Exhaust				
4. Shield Bldg. Exhaust ^{b,c,h}				
D. Iodine and Particulates	Continuous Sampler ^f	W ^d Charcoal Sample	I-131	1×10^{-12}
1. Auxiliary Building Exhaust				
2. Shield Building Exhaust	Continuous Sampler ^f	W ^d Particulate Sample	Principle Gamma Emitters ^g (I-131, Others)	1×10^{-11}
	Continuous Sampler ^f	M Composite Particulate Sample	Gross Alpha	1×10^{-11}
	Continuous Sampler ^f	Q Composite Particulate Sample	Sr-89, Sr-90	1×10^{-11}
E. Noble Gases	Continuous Monitor ^f	Noble Gas Monitor	Noble Gases Gross Beta or Gamma	1×10^{-6}
All Release types as listed in C				

Table 2.2-2 (Page 2 of 3)
RADIOACTIVE GASEOUS WASTE MONITORING SAMPLING AND ANALYSIS PROGRAM
TABLE NOTATION

- a The LLD is defined, for the purpose of these Controls, as the smallest concentration of radioactive material in a sample that will yield a net count above system background that will be detected with 95% probability with only a 5% probability of falsely concluding that a blank observation represents a "real" signal.

For a particular measurement system (which may include radiochemical separation):

$$LLD = \frac{4.66s_b}{E V 2.22 \times 10^6 Y \exp(-\lambda \Delta t)}$$

Where:

LLD is the "a priori" lower limit of detection as defined above in microcurie per unit mass or volume,

s_b is the standard deviation of the background counting rate or of the counting rate of a blank sample as appropriate (as counts per minute),

E is the counting efficiency as counts per disintegration,

V is the sample size in units of mass or volume,

2.22×10^6 is the number of disintegrations per minute per microcurie,

Y is the fractional radiochemical yield (when applicable),

λ is the radioactive decay constant for the particular radionuclide, and

Δt is the elapsed time between midpoint of sample collection and time of counting (midpoint).

It should be noted that the LLD is defined as an a priori (before the fact) limit representing the capability of a measurement system and not an a posteriori (after the fact) limit for a particular measurement.

- b Sampling and analysis shall also be performed following shutdown, startup, or a thermal power change exceeding 15% of RATED THERMAL POWER within 1 hour unless (1) analysis shows that the DOSE EQUIVALENT I-131 concentration in the primary coolant has not increased more than a factor of 3 and (2) the containment noble gas activity monitor (RE-90-106 or RE-90-112) shows that the radioactivity has not increased by more than a factor of 3.
- c Tritium grab samples shall be taken periodically when the refueling canal is flooded.

Table 2.2-2 - RADIOACTIVE GASEOUS WASTE MONITORING SAMPLING AND ANALYSIS
PROGRAM TABLE NOTATION
(Page 3 of 3)

- d Samples shall be changed at least once per 7 days and analyses shall be completed within 48 hours after changing (or after removal from sampler). Sampling shall also be performed at least once per 24 hours for at least 2 days following each shutdown from $\geq 15\%$ RATED THERMAL POWER, startup of $\geq 15\%$ RATED THERMAL POWER or THERMAL POWER change exceeding 15% of RATED THERMAL POWER in one hour and analyses shall be completed within 48 hours of changing. When samples collected for ≤ 24 hours are analyzed, the corresponding LLD's may be increased by a factor of 10.
- e Tritium grab samples shall be taken periodically from the ventilation exhaust from the spent fuel pool area, whenever spent fuel is in the spent fuel pool. 33
- f The ratio of the sample flow rate to the sampled stream flow rate shall be known for the time period covered by each dose or dose rate calculation made in accordance with ODCM Sections 7.2, 7.3, and 7.4.
- g The principal gamma emitters for which the LLD specification applies exclusively are the following radionuclides: Kr-87, Kr-88, Xe-133, Xe-133m, Xe-135, and Xe-138 for noble gases and Mn-54, Fe-59, I-131, Co-58, Co-60, Zn-65, Mo-99, Cs-134, Cs-137, Ce-141 and Ce-144 for particulate principal gamma emitters. This list does not mean that only these nuclides are to be detected and reported. Other gamma peaks which are measurable and identifiable, together with the above nuclides, shall also be analyzed and reported in the Annual Radioactive Effluent Release Report pursuant to ODCM Administrative Control 5.2.
- h During releases via this exhaust system.
- i PURGING - Applicable in MODES 1, 2, 3 and 4, the upper and lower compartments of the containment shall be sampled prior to PURGING. Prior to breaking containment integrity in MODE 5 or 6, the upper and lower compartments of the containment shall be sampled. The incore instrument room purge sample shall be obtained at the shield building exhaust between 20 and 25 minutes following initiation of the incore instrument room PURGE or at the peak of the discharge based on the radiation monitor response. 33
- j VENTING - Applicable in MODES 1, 2, 3, and 4; the containment will be VENTED to the containment annulus and then to the auxiliary building via containment annulus fans. The lower containment compartment shall be sampled weekly and the lower containment radiation monitor response will be recorded daily when VENTING is to occur to account for the radioactivity being discharged from the VENTING process. The lower containment will also be sampled when the reading on the lower containment radiation monitor increases by 50% during any sampling period. 33

1/2 CONTROLS AND SURVEILLANCE REQUIREMENTS

1/2.2 RADIOACTIVE EFFLUENTS

1/2.2.2 GASEOUS EFFLUENTS

1/2.2.2.2 DOSE - NOBLE GASES

CONTROLS

1.2.2.2 In accordance with SQN Technical Specification 6.8.4.f.8, the air dose due to noble gases released in gaseous effluents from each reactor unit to areas at or beyond the UNRESTRICTED AREA BOUNDARY (see Figure 3.1) shall be limited to the following:

| 35

| 33

- a. During any calendar quarter: Less than or equal to 5 mrad for gamma radiation and less than or equal to 10 mrad for beta radiation and
- b. During any calendar year: Less than or equal to 10 mrad for gamma radiation and less than or equal to 20 mrad for beta radiation.

APPLICABILITY: At all times.

ACTION:

- a. With the calculated air dose from radioactive noble gases in gaseous effluents exceeding any of the above limits, prepare and submit to the Nuclear Regulatory Commission within 30 days, pursuant to ODCM Administrative Control 5.4, a Special Report which identifies the cause(s) for exceeding the limit(s) and defines the corrective actions that have been taken to reduce the releases and the proposed corrective actions to be taken to assure that subsequent releases will be in compliance with the above limits.
- b. The provisions of Controls 1.0.3 and 1.0.4 are not applicable.

SURVEILLANCE REQUIREMENTS

2.2.2.2 Cumulative dose contributions for the current calendar quarter and current calendar year for noble gases shall be determined in accordance with the methodology and parameters in ODCM Section 7.3 at least once per 31 days.

1/2 CONTROLS AND SURVEILLANCE REQUIREMENTS

1/2.2 RADIOACTIVE EFFLUENTS

1/2.2.2 GASEOUS EFFLUENTS

1/2.2.2.3 DOSE - I-131, I-133, TRITIUM AND RADIONUCLIDES IN PARTICULATE FORM WITH HALF-LIVES GREATER THAN EIGHT DAYS

CONTROLS

1.2.2.3 In accordance with SQN Technical Specification 6.8.4.f.9, the dose to a MEMBER OF THE PUBLIC from I-131, I-133, tritium and all radionuclides in particulate form with half-lives greater than 8 days in gaseous effluents released to areas at or beyond the UNRESTRICTED AREA BOUNDARY (see Figure 3.1) shall be limited to the following from each reactor unit:

- a. During any calendar quarter: Less than or equal to 7.5 mrem to any organ and,
- b. During any calendar year: Less than or equal to 15 mrem to any organ.

APPLICABILITY: At all times.

ACTION:

- a. With the calculated dose from the release of I-131, I-133, tritium and all radionuclides in particulate form with half-lives greater than 8 days, in gaseous effluents exceeding any of the above limits, prepare and submit to the Nuclear Regulatory Commission within 30 days, pursuant to ODCM Administrative Control 5.4, a Special Report which identifies the cause(s) for exceeding the limit(s) and defines the corrective actions that have been taken to reduce the releases and the proposed corrective actions to be taken to assure that subsequent releases will be in compliance with the above limits.
- b. The provisions of Controls 1.0.3 and 1.0.4 are not applicable.

SURVEILLANCE REQUIREMENTS

2.2.2.3 Cumulative dose contributions for the current calendar quarter and current calendar year for I-131, I-133, tritium and all radionuclides in particulate form with half-lives greater than 8 days shall be determined in accordance with the methodology and parameters in ODCM Section 7.4 at least once per 31 days.

1/2 CONTROLS AND SURVEILLANCE REQUIREMENTS

1/2.2 RADIOACTIVE EFFLUENTS

1/2.2.2 GASEOUS EFFLUENTS

1/2.2.2.4 GASEOUS RADWASTE TREATMENT

CONTROLS

1.2.2.4 In accordance with SQN Technical Specification 6.8.4.f.5 and 6, the GASEOUS RADWASTE TREATMENT SYSTEM and the VENTILATION EXHAUST TREATMENT SYSTEM shall be used to reduce radioactive materials in gaseous waste prior to their discharge when the projected gaseous effluent doses due to gaseous effluent releases to areas at or beyond the SITE BOUNDARY (see Figure 3.1), when averaged over 31 days, would exceed 0.2 mrad per unit for gamma radiation, and 0.4 mrad per unit for beta radiation. The appropriate portions of the VENTILATION EXHAUST TREATMENT SYSTEM shall be used to reduce radioactive materials in gaseous waste prior to their discharge when the projected doses due to gaseous effluents to areas at or beyond the UNRESTRICTED AREA BOUNDARY (See Figure 3.1) when averaged over 31 days would exceed 0.3 mrem per unit to any organ.

| 35

| 33

ACTION:

- a. With the radioactive gaseous waste being discharged without treatment for more than 31 days and in excess of the above limits, prepare and submit to the Commission within 30 days, pursuant to ODCM Administrative Control 5.4, a Special Report which includes the following information:
 1. Identification of the inoperable equipment or subsystems and the reason for inoperability.
 2. Action(s) taken to restore the inoperable equipment to OPERABLE status, and
 3. Summary description of action(s) taken to prevent a recurrence.
- b. The provisions of Controls 1.0.3 and 1.0.4 are not applicable.

SURVEILLANCE REQUIREMENTS

2.2.2.4 Doses due to gaseous releases from the site shall be projected at least once per 31 days, in accordance with the methodology and parameters in ODCM Section 7.5.

1/2 CONTROLS AND SURVEILLANCE REQUIREMENTS

1/2.2 RADIOACTIVE EFFLUENTS

1/2.2.3 TOTAL DOSE

CONTROLS

- 1.2.3 In accordance with SQN Technical Specification 6.8.4.f.10, the annual (calendar year) dose or dose commitment to any MEMBER OF THE PUBLIC, due to releases of radioactivity from uranium fuel cycle sources, shall be limited to less than or equal to 25 mrem to the total body or any organ (except the thyroid, which shall be limited to less than or equal to 75 mrem).

35

APPLICABILITY: At all times.

ACTION:

- a. With the calculated doses from the release of radioactive materials in liquid or gaseous effluents exceeding twice the limits of ODCM Control 1.2.1.2, 1.2.2.2, or 1.2.2.3, calculations should be made to determine whether the above limits have been violated. If such is the case, prepare and submit a Special Report to the Director, Nuclear Reactor Regulation, U.S. Nuclear Regulatory Commission, Washington D.C. 20555, within 30 days, which defines the corrective action to be taken to reduce subsequent releases to prevent recurrence of exceeding the limits above. This Special Report, as defined in 10 CFR Part 20.2203, shall include an analysis which estimates the radiation dose to a MEMBER OF THE PUBLIC from uranium fuel cycle sources (including all effluent pathways and direct radiation) for a calendar year that includes the release(s) covered by this report. If the estimated dose(s) exceeds the above limits, and if the release condition resulting in violation of 40 CFR Part 190 has not already been corrected, the Special Report shall include a request for a variance in accordance with the provisions of 40 CFR Part 190 and include the specified information of Section 190.11(b). Submittal of the report is considered a timely request, and a variance is granted until the staff action on the request is complete.

32

- b. The provisions of Controls 1.0.3 and 1.0.4 are not applicable.

SURVEILLANCE REQUIREMENTS

- 2.2.3 Cumulative dose contributions from liquid and gaseous effluents shall be determined in accordance with the methodology and parameters in ODCM Sections 6.3, 7.3, and 7.4.

1/2 CONTROLS AND SURVEILLANCE REQUIREMENTS

1/2.3 RADIOLOGICAL ENVIRONMENTAL MONITORING

1/2.3.1 MONITORING PROGRAM

CONTROLS

- 1.3.1 In accordance with SQN Technical Specification 6.8.4.g.1, the radiological environmental monitoring program shall be conducted as specified in Table 2.3-1.

35

APPLICABILITY: At all times.

ACTION:

- a. With the radiological environmental monitoring program not being conducted as specified in Table 2.3-1, prepare and submit to the Commission, in the Annual Radiological Environmental Operating Report, a description of the reasons for not conducting the program as required and the plans for preventing a recurrence.
- b. With the level of radioactivity in an environmental sampling medium exceeding the reporting levels of Table 2.3-2 when averaged over any calendar quarter, prepare and submit to the Commission within 30 days from the end of the affected quarter, pursuant to ODCM Administrative Control 5.4, a Special Report that identifies the cause(s) for exceeding the limit(s) and defines the corrective actions to be taken to reduce radioactive effluents so that the potential annual dose to a MEMBER OF THE PUBLIC is less than the calendar year limits of ODCM Controls 1.2.1.2, 1.2.2.2 and 1.2.2.3. When one or more of the radionuclides in Table 2.3-2 is detected in the sampling medium, this report shall be submitted if:

$$\frac{\text{concentration}(1)}{\text{limit level}(1)} + \frac{\text{concentration}(2)}{\text{limit level}(2)} + \dots \geq 1.0$$

When radionuclides other than those in Table 2.3-2 are detected and are the result of plant effluents, this report shall be submitted if the potential annual dose to a MEMBER OF THE PUBLIC from all radionuclides is equal to or greater than the calendar year limits of ODCM Controls 1.2.1.2, 1.2.2.2, and 1.2.2.3. This report is not required if the measured level of radioactivity was not the result of plant effluents; however, in such an event, the condition shall be reported and described in the Annual Radiological Environmental Operating Report

1/2 CONTROLS AND SURVEILLANCE REQUIREMENTS

1/2.3 RADIOLOGICAL ENVIRONMENTAL MONITORING

1/2.3.1 MONITORING PROGRAM

ACTION (CONTINUED):

- c. With milk or fresh leafy vegetable samples unavailable from one or more of the sample locations required by Table 2.3-1, identify locations for obtaining replacement samples and add them to the radiological environmental monitoring program within 30 days. The specified locations from which samples were unavailable may then be deleted from the monitoring program. Pursuant to ODCM Administrative Control 5.1, identify the new locations for obtaining replacement samples in the Annual Radiological Environmental Operating Report. A revised figure(s) and table(s) for the ODCM reflecting the new location(s) shall be included in the next Annual Effluent Release Report pursuant to ODCM Administrative Control 5.2.
- d. The provisions of Controls 1.0.3 and 1.0.4 are not applicable.

SURVEILLANCE REQUIREMENTS

- 2.3.1 The radiological environmental monitoring samples shall be collected pursuant to Table 2.3-1 from the locations given in the tables and figures given in ODCM Section 9.0 and shall be analyzed pursuant to the requirements of Table 2.3-1 and the detection capabilities required by Table 2.3-3.

Table 2.3-1 MINIMUM REQUIRED RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM
(Page 1 of 2)

Exposure Pathway and/or Sample	Number and Location of Samples*	Sampling and Collection Frequency	Type and Frequency of Analysis
AIRBORNE			
Radioiodine and Particulates	Minimum of 5 locations	W Continuous sampler**	Radioiodine canister: Weekly I-131 Particulate sampler: Analyze for gross beta activity \geq 24 hours following filter change. Perform gamma isotopic analysis on each sample when gross beta activity is $>$ 10 times the yearly mean of control samples Q: Perform gamma isotopic analysis on composite (by location) sample.
DIRECT RADIATION			
	35 to 40 locations with \geq 2 dosimeters for continuously measuring and recording dose rate at each location.	Q	Q: Gamma Dose
WATERBORNE			
Surface	3 locations	M Composite*** sample	Gamma isotopic Each composite sample Tritium analysis
Ground	2 locations	Q	Gamma isotopic and tritium analyses of each sample. Gross beta and gamma isotopic analysis
Drinking	Minimum of 1 location	M Composite*** sample	Q Tritium analysis
	2 locations	M Grab sample	Gross beta and gamma isotopic analysis
Shoreline Sediment locations	Minimum of 2 locations	S	Gamma isotopic analysis from each sample.

*Sample locations are given in Table 9.1.

**Continuous sampling with sample collection as required by dust loading, but at least once per 7 days.

***Composite samples shall be collected by collecting an aliquot at intervals not exceeding 2 hours.

Table 2.3-1 MINIMUM REQUIRED RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM
(Page 2 of 2)

Exposure Pathway and/or Sample	Number and Location of Samples*	Sampling and Collection Frequency	Type and Frequency of Analysis
INGESTION			
Milk	Milk from 3 locations. Samples of broad leaf vegetation at offsite locations of highest D/Q if no milk samples are available.	B****	Gamma isotopic and I-131 analysis of each sample.
Fish and Invertebrates	2 locations	One sample in season, or at least once per 184 days if not seasonal. One sample of each of the following species: Channel Catfish Crappie Smallmouth Buffalo	Gamma isotopic analysis on edible portions.
Food Products	Minimum of 2 locations	At time of harvest. One sample of each of the following or similar classes of food products, as available 1. Lettuce and/or cabbage 2. Corn 3. Beans 4. Tomatoes	Gamma isotopic analysis on edible portions.

**** When animals are on pasture, at least once per 31 days at other times.

Table 2.3-2 REPORTING LEVELS FOR RADIOACTIVITY CONCENTRATIONS IN ENVIRONMENTAL SAMPLES

Analysis	Water (pCi/L)	Airborne Particulate or gases (pCi/m ³)	Fish (pCi/kg, wet)	Milk (pCi/L)	Food Products (pCi/kg, wet)
H-3	2×10^4 (a)	N.A.	N.A.	N.A.	N.A.
Mn-54	1×10^3	N.A.	3×10^4	N.A.	N.A.
Fe-59	4×10^2	N.A.	1×10^4	N.A.	N.A.
Co-58	1×10^3	N.A.	3×10^4	N.A.	N.A.
Co-60	3×10^2	N.A.	1×10^4	N.A.	N.A.
Zn-65	3×10^2	N.A.	2×10^4	N.A.	N.A.
Zr-Nb-95	4×10^2	N.A.	N.A.	N.A.	N.A.
I-131	2(b)	0.9	N.A.	3	1×10^2
Cs-134	30	10	1×10^3	60	1×10^3
Cs-137	50	20	2×10^3	70	2×10^3
Ba-La-140	2×10^2	N.A.	N.A.	3×10^2	N.A.

(a) For drinking water samples. This is 40 CFR Part 141 value. If no drinking water pathway exists, a value of 30,000 pCi/L may be used.

(b) If no drinking water pathway exists, a value of 20 pCi/L may be used.

Table 2.3-3 MAXIMUM VALUES FOR THE LOWER LIMITS OF DETECTION (LLD)^{a,b}
(Page 1 of 2)

Analysis	Water (pCi/L)	Airborne Particulate or Gases (pCi/m ³)	Fish (pCi/kg, wet)	Milk (pCi/L)	Food Products (pCi/kg,wet)	Sediment (pCi/kg,dry)
gross beta	4	1x10 ⁻²	N.A.	N.A.	N.A.	N.A.
H-3	2000*	N.A.	N.A.	N.A.	N.A.	N.A.
Mn-54	15	N.A.	130	N.A.	N.A.	N.A.
Fe-59	30	N.A.	260	N.A.	N.A.	N.A.
Co-58,60	15	N.A.	130	N.A.	N.A.	N.A.
Zn-65	30	N.A.	260	N.A.	N.A.	N.A.
Zr-95	30	N.A.	N.A.	N.A.	N.A.	N.A.
Nb-95	15	N.A.	N.A.	N.A.	N.A.	N.A.
I-131	1**	7x10 ⁻²	N.A.	1	60	N.A.
Cs-134	15	5x10 ⁻²	130	15	60	150
Cs-137	18	6x10 ⁻²	150	18	80	180
Ba-140	60	N.A.	N.A.	60	N.A.	N.A.
La-140	15	N.A.	N.A.	15	N.A.	N.A.

* If no drinking water pathway exists, a value of 3000 pCi/L may be used.

** If no drinking water pathway exists, a value of 15 pCi/L may be used.

Table 2.3-3 MAXIMUM VALUES FOR THE LOWER LIMITS OF DETECTION (LLD)^{a,b}
(Page 2 of 2) TABLE NOTATION

- a The LLD is defined, for the purpose of these Controls, as the smallest concentration of radioactive material in a sample that will yield a net count above system background that will be detected with 95% probability with only a 5% probability of falsely concluding that a blank observation represents a "real" signal.

For a particular measurement system (which may include radiochemical separation):

$$LLD = \frac{4.66s_b}{E V 2.22 Y \exp(-\lambda \Delta t)}$$

where:

LLD is the "a priori" lower limit of detection as defined above in picocurie per unit mass or volume,

s_b is the standard deviation of the background counting rate or of the counting rate of a blank sample as appropriate (as counts per minute),

E is the counting efficiency as counts per disintegration,

V is the sample size in units of mass or volume,

2.22 is the number of disintegrations per minute per picocurie,

Y is the fractional radiochemical yield (when applicable),

λ is the radioactive decay constant for the particular radionuclide, and

Δt for environmental samples is the elapsed time between sample collection (or end of the sample collection period) and time of counting.

It should be recognized that the LLD is defined as an a priori (before the fact) limit representing the capability of a measurement system and not an a posteriori (after the fact) limit for a particular measurement. Analysis will be performed in such a manner that the stated LLDs will be achieved under routine conditions.

- b Other peaks which are measurable and identifiable, together with the radionuclides above, shall be identified and reported.

1/2 CONTROLS AND SURVEILLANCE REQUIREMENTS

1/2.3 RADIOLOGICAL ENVIRONMENTAL MONITORING

1/2.3.2 LAND USE CENSUS

CONTROLS

- 1.3.2 In accordance with SQN Technical Specification 6.8.4.g.2, a Land Use Census shall be conducted and shall identify within a distance of 8 km (5 miles) the location in each of the 16 meteorological sectors of the nearest milk animal, the nearest residence, and the nearest garden^a of greater than 50 m² (500 ft²) producing fresh leafy vegetables.

^aBroad leaf vegetation sampling of at least three different kinds of vegetation may be performed at the site boundary in each of two different direction sectors with the highest predicted D/Qs in lieu of the garden census. Specifications for broad leaf vegetation sampling in Table 2.3-1 shall be followed, including analysis of control samples.

APPLICABILITY: At all times.

ACTION:

- a. With a Land Use Census identifying a location(s) that yields a calculated dose or dose commitment 20% greater than at a location from which doses are currently being calculated in ODCM Section 7.3 and 7.4 identify the new location(s) in the next Annual Effluent Release Report pursuant to ODCM Administrative Control 5.2.
- b. With a Land Use Census identifying a location(s) that yields a calculated dose or dose commitment (via the same pathway) 20% greater than at a location from which samples are currently being obtained in accordance with the requirements of ODCM Control 1.3.1, add the new location(s) within 30 days to the radiological environmental monitoring program given in ODCM Section 9.0, if samples are available. The sampling location(s), excluding the control station location, having the lowest calculated dose or dose commitment(s), via the same exposure pathway, may be deleted from this monitoring program after October 31 of the year in which this Land Use Census was conducted. Pursuant to ODCM Administrative Controls 5.2 and 5.3, submit in the next Annual Effluent Release Report documentation for a change in the ODCM including a revised figure(s) and table(s) for the ODCM reflecting the new location(s) with the information supporting the change in sampling locations.
- c. The provisions of Controls 1.0.3 and 1.0.4 are not applicable.

1/2 CONTROLS AND SURVEILLANCE REQUIREMENTS

1/2.3 RADIOLOGICAL ENVIRONMENTAL MONITORING

1/2.3.2 LAND USE CENSUS

SURVEILLANCE REQUIREMENTS

- 2.3.2 The Land Use Census shall be conducted during the growing season at least once per 12 months using that information that will provide the best results, such as by a door-to-door survey, mail survey, telephone survey, aerial survey, or by consulting local agricultural authorities. The results of the Land Use Census shall be included in the Annual Radiological Environmental Operating Report pursuant to ODCM Administrative Control 5.1.

1/2 CONTROLS AND SURVEILLANCE REQUIREMENTS

1/2.3 RADIOLOGICAL ENVIRONMENTAL MONITORING

1/2.3.3 INTERLABORATORY COMPARISON PROGRAM

CONTROLS

- 1.3.3 In accordance with SQN Technical Specification 6.8.4.g.3, analyses shall be performed on radioactive materials supplied as part of an Interlaboratory Comparison Program which has been approved by the Commission.

| 35

APPLICABILITY: At all times.

ACTION:

- a. With analyses not being performed as required above, report the corrective actions being taken to prevent a recurrence to the Commission in the Annual Radiological Environmental Operating Report pursuant to ODCM Administrative Control 5.1.
- b. The provisions of Controls 1.0.3 and 1.0.4 are not applicable.

SURVEILLANCE REQUIREMENTS

- 2.3.3 A summary of the results obtained as a part of the above required Interlaboratory Comparison Program and in accordance with the guidance below shall be included in the Annual Radiological Environmental Operating Report pursuant to ODCM Administrative Control 5.1.

BASES FOR
SECTIONS 1.0 AND 2.0
CONTROLS
AND
SURVEILLANCE REQUIREMENTS

NOTE

The BASES contained in succeeding pages summarize the reasons for the Controls in Sections 1.0 and 2.0, but are not part of these Controls.

BASES

INSTRUMENTATION

1/2.1.1 RADIOACTIVE LIQUID EFFLUENT MONITORING INSTRUMENTATION

The radioactive liquid effluent instrumentation is provided to monitor and control, as applicable, the releases of radioactive materials in liquid effluents during actual or potential releases of liquid effluents. The alarm/trip setpoints for these instruments shall be calculated in accordance with the procedures in ODCM Section 6.2 to ensure that the alarm/trip will occur prior to exceeding ten times the limits of 10 CFR Part 20. The OPERABILITY and use of this instrumentation is consistent with the requirements of General Design Criteria 60, 63, and 64 of Appendix A to 10 CFR Part 50.

32

1/2.1.2 RADIOACTIVE GASEOUS EFFLUENT MONITORING INSTRUMENTATION

The radioactive gaseous effluent instrumentation is provided to monitor and control, as applicable, the releases of radioactive materials in gaseous effluents during actual or potential releases of gaseous effluents. The alarm/trip setpoints for these instruments shall be calculated in accordance with the procedures in ODCM Section 7.1 to ensure that the alarm/trip will occur prior to exceeding ten times the limits of 10 CFR Part 20. The OPERABILITY and use of this instrumentation is consistent with the requirements of General Design Criteria 60, 63, and 64 of Appendix A to 10 CFR Part 50.

32

1/2.2 RADIOACTIVE EFFLUENTS

1/2.2.1.1 CONCENTRATION

This Control is provided to ensure that the concentration of radioactive materials released at any time in liquid waste effluents to UNRESTRICTED AREAS will be less than ten times the concentration levels specified in 10 CFR Part 20, Appendix B, Table 2, Column 2. This limitation provides additional assurance that the levels of radioactive materials in bodies of water in UNRESTRICTED AREAS will result in exposures within (1) the Section II.A design objectives of Appendix I, 10 CFR 50, and (2) the limits of 10 CFR 20.1301(a)(1) to a MEMBER OF THE PUBLIC. The concentration limit for dissolved or entrained noble gases is based upon the assumption that Xe-135 is the controlling radioisotope and its MPC in air (submersion) was converted to an equivalent concentration in water using the methods described in International Commission of Radiological Protection (ICRP) Publication 2.

32

32

1/2.2.1.2 DOSE

This Control is provided to implement the requirements of Sections II.A, III.A, and IV.A of Appendix I, 10 CFR Part 50. The requirement implements the guide set forth in Section II.A of Appendix I. The action statements provide the required operating flexibility and at the same time implement the guides set forth in Section IV.A of Appendix I to assure that the releases of radioactive materials in liquid effluents will be kept "as low as reasonable achievable." Also, for fresh water sites with drinking water supplies which can be potentially affected by plant operations, there is reasonable assurance that the operation of the facility will not result in radionuclide concentrations in the finished drinking water that are in excess of the requirements of 40 CFR Part 141. The dose calculations in ODCM Section 6.3 implement the requirements in Section III.A of Appendix I that conformance with the guides of Appendix I be shown by calculational procedures based on models and data, such that the actual exposure of a MEMBER OF THE PUBLIC through appropriately modeled pathways is unlikely to substantially underestimated. The equations specified in Section 6.3 for calculating the doses due to the actual release rates of radioactive materials in liquid effluents are consistent with the methodology

BASES

1/2.2.1.2 DOSE (continued)

provided in Regulatory Guide 1.109, "Calculation of Annual Doses to Man from Routine Releases of Reactor Effluents for the Purposes of Evaluating Compliance with 10 CFR Part 50, Appendix I," Revision 1, October 1977 and Regulatory Guide 1.113, "Estimating Aquatic Dispersion of Effluents from Accidental and Routine Reactor Releases for the Purpose of Implementing Appendix I," April 1977.

This Control applies to the release of liquid effluents from each reactor at the site. For units with shared radwaste treatment systems, the liquid effluents from the shared systems are proportioned among the units sharing that system.

Compliance with this Control will be considered to demonstrate compliance with the 0.1 rem limit of 10 CFR Part 20.1301(a)(1) per 56 FR 23374.

32

1/2.2.1.3 LIQUID RADWASTE TREATMENT SYSTEM

The Control that the appropriate portions of this system be used when specified provides assurance that the releases of radioactive materials in liquid effluents will be kept "as low as reasonable achievable." This requirement implements the requirements of 10 CFR Part 50.36a, General Design Criteria 60 of 10 CFR Part 50 Appendix A, and the design objective given in 10 CFR Part 50 Appendix I, Section II.D. The specified limits governing the use of appropriate portions of the liquid radwaste system were specified as a suitable fraction of the dose design objectives set forth in 10 CFR Part 50 Appendix I, Section II.A, for liquid effluents.

1/2.2.2.1 DOSE RATE

This Control is provided to ensure that the external dose rate at any time at the UNRESTRICTED AREA BOUNDARY from gaseous effluents from all units on the site will be within the limits of 10 CFR Part 20.1301(a)(1) for UNRESTRICTED AREAS. The 500 mrem/year dose rate will ensure that the instantaneous dose rate is well below 2 mrem/hour. The limits provide reasonable assurance that radioactive material discharged in gaseous effluents will not result in the exposure of a MEMBER OF THE PUBLIC, to annual average concentrations exceeding the limits specified in 10 CFR Part 20, Appendix B, Table 2. For MEMBERS OF THE PUBLIC who may at times be within the CONTROLLED AREA, the occupancy of the individual will be sufficiently low to compensate for any increase in the atmospheric diffusion factor above that for the UNRESTRICTED AREA BOUNDARY. The specified release rate limits restrict, at all times, the corresponding gamma and beta dose rates above background to an individual at or beyond the UNRESTRICTED AREA BOUNDARY to less than or equal to 500 mrem/year to the total body or to less than or equal to 3000 mrem/year to the skin. These release rate limits also restrict, at all times, the corresponding thyroid dose rate above background to an infant via the cow-milk-infant pathway to less than or equal to 1500 mrem/year for the nearest cow to the plant. This requirement applies to the release of gaseous effluents from all reactors at the site. For units with shared radwaste treatment systems, the gaseous effluents from the shared systems are proportioned among the units sharing that system.

32

32

33

33

BASES

1/2.2 RADIOACTIVE EFFLUENTS

1/2.2.2.2 DOSE - NOBLE GASES

This requirement is provided to implement the requirements of 10 CFR Part 50 Appendix I, Sections II.B, III.A and IV.A. The requirement implements the guides set forth in Appendix I Section II.B. Compliance with this Control will be considered to demonstrate compliance with the 0.1 rem limit of 10 CFR Part 20.1301(a)(1) per 56 FR 23374. The action to be taken provides the required operating flexibility and at the same time implements the guides set forth in Section IV.A of Appendix I to assure that the releases of radioactive material in gaseous effluents will be kept "as low as reasonably achievable." The surveillance implements the requirements in Section III.A of Appendix I that conformance with the guides of Appendix I be shown by calculational procedures based on models and data such that the actual exposure of a MEMBER OF THE PUBLIC through appropriately modeled pathways is unlikely to be substantially underestimated. The dose calculations established in ODCM Section 7.3 for calculating the doses due to the actual release rates of radioactive noble gases in gaseous effluents are consistent with the methodology provided in Regulatory Guide 1.109, "Calculation of Annual Doses to Man from Routine Releases of Reactor Effluents for the Purposes of Evaluating Compliance with 10 CFR Part 50, Appendix I," Revision 1, October 1977 and Regulatory Guide 1.111, "Methods for Estimating Atmospheric Transport and Dispersion of Gaseous Effluents in Routine Releases from Light-Water Cooled Reactors," Revision 1, July 1977. The ODCM equations provided for determining the air doses at the UNRESTRICTED AREA BOUNDARY are based upon the historical average atmospheric conditions.

32

33

1/2.2.2.3 DOSE - IODINE-131, IODINE-133, TRITIUM, AND RADIOACTIVE MATERIAL IN PARTICULATE FORM WITH HALF-LIFE GREATER THAN EIGHT DAYS

This Control is provided to implement the requirements 10 CFR Part 50 Appendix I Sections II.C, III.A and IV.A. The requirement implements the guides set forth in Appendix I Section II.C. The action to be taken provides the required operating flexibility and at the same time implements the guides set forth in Appendix I Section IV.A to assure that the releases of radioactive material in gaseous effluents will be kept "as low as reasonably achievable." Section 7.4 calculational methods implement the requirements in Appendix I Section III.A that conformance with the guides of Appendix I be shown by calculational procedures based on models and data such that the actual exposure of a MEMBER OF THE PUBLIC through appropriately modeled pathways is unlikely to be substantially underestimated. Section 7.4 calculational methods for calculating the doses due to the actual release rates of the subject materials are consistent with the methodologies provided in NUREG/CR-1004, "A Statistical Analysis of Selected Parameters for Predicting Food Chain Transport and Internal Dose of Radionuclides," October 1979 and Regulatory Guide 1.109, "Calculation of Annual Doses to Man from Routine Releases of Reactor Effluents for the Purposes of Evaluating Compliance with 10 CFR Part 50, Appendix I," Revision 1, October 1977 and Regulatory Guide 1.111, "Methods for Estimating Atmospheric Transport and Dispersion of Gaseous Effluents in Routine Releases from Light-Water Cooled Reactors," Revision 1, July 1977. These equations also provide for determining the actual doses based upon the historical average atmospheric conditions. The release rate specifications for Iodine-131, Iodine-133, tritium and all radionuclides in particulate form with half-lives greater than 8 days are dependent on the existing radionuclide pathways to man, beyond the UNRESTRICTED AREA BOUNDARY. The pathways which were examined in the development of these calculations were: 1) individual inhalation of airborne radionuclides, 2) deposition of radionuclides onto green leafy vegetation with subsequent consumption by man, 3) deposition onto grassy areas where milk animals and meat producing animals graze with consumption of the milk and meat by man, and 4) deposition on the ground with subsequent exposure of man.

33

BASES

1/2.3 RADIOACTIVE EFFLUENTS

1/2.3.2.4 GASEOUS RADWASTE TREATMENT SYSTEM

This Control that the appropriate portions of these systems be used, when specified, provides reasonable assurance that the releases of radioactive materials in gaseous effluents will be kept "as low as reasonably achievable." This Control implements the requirements of 10 CFR Part 50.36a, General Design Criteria 60 of 10 CFR Part 50 Appendix A, and the design objectives given in 10 CFR Part 50 Appendix I Section II.D. The specified limits governing the use of appropriate portions of the systems were specified as a suitable fraction of the dose design objectives set forth in 10 CFR Part 50 Appendix I Section II.B and II.C, for gaseous effluents.

1/2.2.3 TOTAL DOSE

This Control is provided to meet the dose limitations of 40 CFR Part 190 that have been incorporated into 10 CFR Part 20 by 46 FR 18525. Compliance with this Control will be considered to demonstrate compliance with the 0.1 rem limit of 10 CFR Part 20.1301(a)(1) per 56 FR 23374. The ACTION requires the preparation and submittal of a Special Report whenever the calculated doses due to releases of radioactivity and to radiation from uranium fuel cycle sources exceed 25 mrem to the total body or any other organ except thyroid, which shall be limited to less than or equal to 75 mrem. For sites containing up to 4 reactors, it is highly unlikely that the resultant dose to a MEMBER OF THE PUBLIC will exceed the dose limits of 40 CFR Part 190 if the individual reactors remain within twice the dose design objectives of Appendix I and if direct radiation doses from the units and from outside storage tanks are kept small. The Special Report will describe a course of action that should result in the limitation of annual dose to a MEMBER OF THE PUBLIC to within the 40 CFR Part 190 limits. For the purposes of the Special Report, it may be assumed that the dose commitment to the MEMBER OF THE PUBLIC from other uranium fuel cycle sources is negligible, with the exception that dose contributions from other nuclear fuel cycle facilities at the same site or within a radius of 8 km must be considered.

If the dose to any MEMBER OF THE PUBLIC is estimated to exceed the requirements of 40 CFR Part 190, the Special Report with a request for a variance (provide the release conditions resulting in violation of 40 CFR Part 190 have not already been corrected), in accordance with the provisions of 40 CFR Part 190.11 and 10 CFR Part 20.2203, is considered to be a timely request and fulfills the requirements of 40 CFR Part 190 until NRC staff action is completed. The variance only relates to the limits of 40 CFR Part 190, and does not apply in any way to the other requirements for dose limitation of 10 CFR Part 20, as addressed in ODCM Controls 1.2.1.1 and 1.2.2.1. An individual is not considered a MEMBER OF THE PUBLIC during any period in which he/she is engaged in carrying out any operation that is a part of the nuclear fuel cycle.

32

32

BASES

1/2.3 RADIOLOGICAL ENVIRONMENTAL MONITORING

1/2.3.1 MONITORING PROGRAM

The radiological environmental monitoring program required by this Control provides representative measurements of radiation and of radioactive materials in those exposure pathways and for those radionuclides that lead to the highest potential radiation exposures of MEMBERS OF THE PUBLIC resulting from the station operation. This monitoring program implements Section IV.B.2 of Appendix I to 10 CFR Part 50 and thereby supplements the radiological effluent monitoring program by verifying that the measurable concentration of radioactive materials and levels of radiation are not higher than expected on the basis of the effluent measurements and modeling of the environmental exposure pathways. Guidance for this monitoring program is provided by the Radiological Assessment Branch Technical Position on Environmental Monitoring.

The required detection capabilities for environmental sample analyses are tabulated in terms of the lower limits of detection (LLDs). The LLDs required by Table 2.3-3 are considered optimum for routine environmental measurements in industrial laboratories. It should be recognized that the LLD is defined as an a priori (before the fact) limit representing the capability of a measurement system and not as a posteriori (after the fact) limit for a particular measurement.

Detailed description of the LLD, and other detection limits can be found in HASL Procedures Manual, HASL-300 (revised annually), Curie, L. A., "Limits for Qualitative Detection and Quantitative Determination - Application to Radiochemistry," Anal. Chem. **40**, 586-93 (1968), and Hartwell, J. K., "Detection Limits for Radioanalytical Counting Techniques," Atlantic Richfield Hanford Company Report ARH-SA-215 (June 1975).

1/2.3.2 LAND USE CENSUS

This Control is provided to ensure that changes in the use of unrestricted areas are identified and that modifications to the monitoring program are made if required by the results of that census. The best survey information from the door-to-door, aerial, or consulting with local agricultural authorities shall be used. This census satisfies the requirements of Section IV.B.3 of Appendix I to 10 CFR Part 50. Restricting the census to gardens of greater than 500 ft² provides assurance that significant exposure pathways via leafy vegetables will be identified and monitored since a garden of this size is the minimum required to provide the quantity (26 kg/yr) of leafy vegetables assumed in Regulatory Guide 1.109 for consumption by a child. To determine this minimum garden size, the following assumptions were used, 1) that 20% of the garden was used for growing broad leaf vegetation (i.e., similar to lettuce and cabbage), and 2) a vegetation yield of 2 kg/m².

1/2.3.3 INTERLABORATORY COMPARISON

The requirement for participation in an Interlaboratory Comparison Program is provided to ensure that independent checks on the precision and accuracy of the measurements of radioactive material in environmental sample matrices are performed as part of the quality assurance program for environmental monitoring in order to demonstrate that the results are reasonably valid.

SECTION 3.0

DEFINITIONS

3.0 DEFINITIONS

The defined terms in this section appear in capitalized type in the text and are applicable throughout this ODCM.

3.1 CHANNEL CALIBRATION

A CHANNEL CALIBRATION shall be the adjustment, as necessary, of the channel output such that it responds with the necessary range and accuracy to known values of the parameter which the channel monitors. The CHANNEL CALIBRATION shall encompass the entire channel including the sensor and alarm and/or trip functions, and shall include the CHANNEL FUNCTIONAL TEST. The CHANNEL CALIBRATION may be performed by any series of sequential, overlapping, or total channel steps such that the entire channel is calibrated.

3.2 CHANNEL CHECK

A channel check shall be the qualitative assessment of channel behavior during operation by observation. This determination shall include, where possible, comparison of the channel indication and/or status with other indications and/or status derived from independent instrument channels measuring the same parameter.

3.3 CHANNEL FUNCTIONAL TEST

A CHANNEL FUNCTIONAL TEST shall be:

- a. Analog channels - the injection of a simulated signal into the channel as close to the sensor as practicable to verify OPERABILITY including alarm and/or trip functions.
- b. Bistable channel - the injection of a simulated signal into the sensor to verify OPERABILITY including alarm and/or trip function.

3.4 CONTROLLED AREA

A CONTROLLED AREA is the area outside the RESTRICTED AREA but inside the UNRESTRICTED AREA BOUNDARY (See Figure 3.1).

32

33

3.5 DOSE EQUIVALENT I-131

DOSE EQUIVALENT I-131 shall be that concentration of I-131 ($\mu\text{Ci}/\text{gram}$) which alone would produce the same thyroid dose as the quantity and isotopic mixture of I-131, I-132, I-133, I-134, and I-135 actually present. The thyroid dose conversion factors used for this calculation shall be those listed in Table III of TID-14844, "Calculation of Distance Factors for Power and Test Reactor Sites."

3.6 GASEOUS RADWASTE TREATMENT SYSTEM

A GASEOUS RADWASTE TREATMENT SYSTEM is any system designed and installed to reduce radioactive gaseous effluents by collecting primary coolant system offgases from the primary system and providing for delay or holdup for the purpose of reducing the total radioactivity prior to release to the environment.

3.0 DEFINITIONS (continued)

3.7 MEMBER(S) OF THE PUBLIC

MEMBER(S) OF THE PUBLIC as defined in 10 CFR 20, shall include all individuals in CONTROLLED OR UNRESTRICTED AREAS.

32

3.8 OPERABLE - OPERABILITY

A system, subsystem, train, component, or device shall be OPERABLE or have OPERABILITY when it is capable of performing its specified function(s), and when all necessary attendant instrumentation, controls, a normal and an emergency electrical power source, cooling or seal water, lubrication or other auxiliary equipment that are required for the system, subsystem, train, component, or device to perform its function(s) are also capable of performing their related support function.

3.9 MODE

A MODE shall correspond to any one inclusive combination of core reactivity condition, power level, and average reactor coolant temperature specified in Table 1.1 of the SQN Technical Specifications.

3.10 PURGE - PURGING

PURGE or PURGING is the controlled process of discharging air or gas from a confinement to maintain temperature, pressure, humidity, concentration or other operating condition, in such a manner that replacement air or gas is required to purify the confinement.

3.11 RATED THERMAL POWER

RATED THERMAL POWER shall be a total reactor core heat transfer rate to the reactor coolant of 3411 MWt.

3.12 RESTRICTED AREA

The RESTRICTED AREA, as defined in 10 CFR Part 20, is that area, access to which is limited by the licensee for the purposes of protecting individuals against undue risks from exposure to radiation and radioactive materials. The permanent RESTRICTED AREA is shown on Figure 3.1, but temporary restricted areas outside the permanent RESTRICTED AREA may be defined by SQN.

32, 33

3.13 SITE BOUNDARY

NOT USED

33

3.14 SOURCE/SENSOR CHECK

A SOURCE/SENSOR CHECK shall be the qualitative assessment of channel response when the channel sensor is exposed to a radioactive source or other channel sensor internal test circuit.

3.0 DEFINITIONS (continued)

3.15 UNRESTRICTED AREA/BOUNDARY

An UNRESTRICTED AREA/BOUNDARY, as used for calculations performed pursuant to 10 CFR Part 50.36a, shall be an area at or beyond the site boundary which is utilized in the ODCM Controls to keep levels of radioactive materials in liquid and gaseous effluents as low as is reasonably achievable. The UNRESTRICTED AREA does not include areas over water bodies (See Figure 3.1).

33

3.16 VENTILATION EXHAUST TREATMENT SYSTEM

A VENTILATION EXHAUST TREATMENT SYSTEM is any system designed and installed to reduce gaseous radioiodine or radioactive material in particulate form in effluents by passing ventilation or vent exhaust gases through charcoal adsorbers and/or HEPA filters for the purpose of removing iodines or particulates from the gaseous exhaust stream prior to the release to the environment (such a system is not considered to have any effect on noble gas effluents). Engineered Safety Feature (ESF) atmospheric cleanup systems are not considered to be VENTILATION EXHAUST TREATMENT SYSTEM components.

3.17 VENTING

VENTING is the controlled process of discharging air or gas from a confinement to maintain temperature, pressure, humidity, concentration, or other operating condition, in such a manner that replacement air gas is not provided or required during VENTING. Vent, used in system names, does not imply a VENTING process.

Table 3.1 FREQUENCY NOTATION

P = Completed prior to each release

D = At least once per 24 hours

B = At least once per 15 days


M = At least once per 31 days

Q = At least once per 92 days

R = At least once per 18 months

N.A. = Not Applicable

Figure 3.1 UNRESTRICTED AREA BOUNDARY



33

Area between the RESTRICTED AREA and the UNRESTRICTED AREA BOUNDARIES is the CONTROLLED AREA. Area outside the UNRESTRICTED AREA BOUNDARY is the UNRESTRICTED AREA.

SECTION 4.0

(NOT USED)

SECTION 5.0
ADMINISTRATIVE CONTROLS

5.0 ADMINISTRATIVE CONTROLS

5.1 ANNUAL RADIOLOGICAL ENVIRONMENTAL OPERATING REPORT

As required by SQN Technical Specification 6.9.1.6, Routine Annual Radiological Environmental Operating Reports covering the operation of the unit during the previous calendar year shall be submitted prior to May 1 of each year.

The annual radiological environmental operating reports shall include summaries, interpretations, and an analysis of trends of the results of the radiological environmental surveillance activities for the report period, including a comparison with preoperational studies, operational controls (as appropriate), and previous environmental surveillance reports and an assessment of the observed impacts of the plant operation on the environment. The reports shall also include the results of land use censuses required by ODCM Control 1.3.2 and a listing of the new locations for dose calculations and/or environmental monitoring identified by the land use census. If harmful effects or evidence of irreversible damage are detected by the monitoring, the report shall provide an analysis of the problems and a planned course of action to alleviate the problem.

The annual radiological environmental operating reports shall include summarized and tabulated results in the format of Regulatory Guide 4.8, December 1975 of all radiological environmental samples taken during the report period. In the event that some results are not available for inclusion with the report, the report shall be submitted noting and explaining the reasons for the missing results. The missing data shall be submitted as soon as possible in a supplementary report.

The reports shall also include the following: a summary description of the radiological environmental monitoring program; a map of all sampling locations keyed to a table giving distances and directions from one reactor; and the results of licensee participation in the Interlaboratory Comparison Program required by ODCM Control 1.3.3.

5.2 ANNUAL RADIOACTIVE EFFLUENT RELEASE REPORT

As required by SQN Technical Specification 6.9.1.8, an Annual Radioactive Effluent Release Report covering the operation of the unit during the previous 12 months of operation shall be submitted prior to May 1 of each year.

Annual radioactive release reports shall include a summary of the quantities of radioactive liquid and gaseous effluents and solid waste released from the unit as outlined in Regulatory Guide 1.21, "Measuring, Evaluating, and Reporting Radioactivity in Solid Wastes and Releases of Radioactive Materials in Liquid and Gaseous Effluents from Light-Water-Cooled Nuclear Power Plants," Revision 1, June 1974, with data summarized on a quarterly basis following the format of Appendix B thereof.

The annual radioactive release report shall include unplanned releases from the site to unrestricted areas on a quarterly basis and shall also include any changes made to the ODCM pursuant to ODCM Administrative Control 5.3.

5.0 ADMINISTRATIVE CONTROLS

5.2 ANNUAL RADIOACTIVE EFFLUENT RELEASE REPORT (continued)

The annual radioactive release report shall include information for solid waste as outlined in the Process Control Program, and shall also include any changes made to the PCP during the reporting period.

The annual radioactive release report shall include a discussion of any licensee initiated major changes to the radioactive waste systems as required by SQN Technical Specification 6.15.1.1.

The annual radioactive effluent release report (Radiological Impact) shall include an annual summary of hourly meteorological data collected over the previous year. This annual summary may be either in the form of an hour-by-hour listing of wind speed, wind direction, atmospheric stability, and precipitation (if measured) on magnetic tape, or in the form of joint frequency distributions of wind speed, wind direction, and atmospheric stability. In lieu of submission with the annual radioactive effluent release report, this summary of required meteorological data may be retained on site in a file that shall be provided to NRC upon request. This same report shall include an assessment of the radiation doses due to radioactive liquid and gaseous effluents released from the unit or station during the previous calendar year. This same report shall also include an assessment of the radiation doses from radioactive liquid and gaseous effluents to MEMBERS OF THE PUBLIC due to their activities inside the UNRESTRICTED AREA BOUNDARY (Figure 3.1) during the report period. All assumptions used in making these assessments (i.e., specific activity, exposure time, and location) shall be included in these reports.

| 33

The meteorological conditions concurrent with the time of release of radioactive materials in gaseous effluents (as determined by sampling frequency and measurement) shall be used for determining the gaseous pathway doses. The assessment of radiation doses shall be performed in accordance with Sections 6.6 and 7.6.

The annual radioactive effluent release report to be submitted after January 1 of each year shall also include an assessment of radiation doses to the likely most exposed MEMBERS OF THE PUBLIC from reactor releases and other nearby uranium fuel cycle sources (including doses from primary effluent pathways and direct radiation) for the previous calendar year to show conformance with 40 CFR 190, Environmental Radiation Protection Standards for Nuclear Power Operation, in accordance with ODCM Section 8.0. Acceptable methods for calculating the dose contribution from liquid and gaseous effluents are given in Regulatory Guide 1.109, Revision 1.

5.0 ADMINISTRATIVE CONTROLS

5.3 OFFSITE DOSE CALCULATION MANUAL CHANGES

As required by SQN Technical Specification 6.14, changes to the ODCM:

1. Shall be documented and records of reviews performed shall be retained as required by SQN Technical Specification 6.10.2.p. This documentation shall contain:
 - a. Sufficient information to support the change together with the appropriate analyses or evaluations justifying the change(s) and
 - b. A determination that the change will maintain the level of radioactive effluent control required by 10 CFR Part 20.1302, 40 CFR Part 190, 10 CFR Part 50.36a, and Appendix I to 10 CFR Part 50 and not adversely impact the accuracy or reliability of effluent, dose, or setpoint calculations.
2. Shall become effective after review and acceptance by the SQN PORC .
3. Shall be submitted to the Commission in the form of a complete, legible copy of the entire ODCM as a part of or concurrent with the Annual Radioactive Effluent Report for the period of the report in which any change to the ODCM was made. Each change shall be identified by markings in the margin of the affected pages, clearly indicating the area of the page that was changed, and shall indicate the date (i.e., month/year) the change was implemented.

| 34

5.4 SPECIAL REPORTS

Special Reports shall be submitted within the time period specified for each report, in accordance with 10 CFR Part 50.4.

SECTION 6.0
LIQUID EFFLUENTS

SECTION 6.0 LIQUID EFFLUENTS

RELEASE POINTS

There are four systems from which liquid effluents are released to the environment. These are the Liquid Radwaste System, the Condensate Demineralizer System, the Turbine Building Sump, and the Units 1 and 2 Steam Generator Blowdown. Figure 6.1 provides an outline of the liquid release paths and discharge points with associated flow rates and radiation monitors.

All liquid effluents are ultimately discharged to the Diffuser Pond which releases to the Tennessee River. The Essential Raw Cooling Water (ERCW) routinely provides dilution for liquid effluents at a minimum flow rate of 15,000 gpm. ERCW flow is monitored by radiation monitors 0-RM-133, -134, -140, -141.

Liquid Radwaste System

The Liquid Radwaste System processes liquid from the Reactor Building and Auxiliary Building Floor Drains and the laundry/hot shower and chemical drain tanks. Figure 6.2 provides a schematic of the Liquid Radwaste System, showing the liquid pathways, flow rate and radiation monitors. The normal release points for liquid radwaste are the Monitor Tank and the Cask Decontamination Collector Tank (CDCT). The Monitor Tank has a capacity of 22,000 gal and is released routinely at a flow rate of 125 gpm. The CDCT has a capacity of 15,000 gal and is also released routinely at a flow rate of 125 gpm. The Monitor Tank and CDCT discharge to the Cooling Tower Blowdown (CTBD) line as a batch release and are monitored by radiation monitor 0-RM-90-122.

Condensate Demineralizer System

The Condensate Demineralizer System processes liquid wastes coming from the High Crud Tanks (HCT-1 and -2), the Neutralization Tank, and the Non-Reclaimable Waste Tank (NRWT). The HCTs have a capacity of 20,000 gal and a maximum discharge flow rate of 245 gpm. The Neutralization Tank has a capacity of 19,000 gal and a maximum discharge flow rate of 245 gpm. The NRWT has a capacity of 11,000 gal and a maximum discharge flow rate of 245 gpm. The Condensate Demineralizer System is routinely released to the CTBD line and is monitored by radiation monitor 0-RM-90-225.

Turbine Building Sump

The Turbine Building Sump (TBS) normally releases to the Low Volume Waste Treatment Pond (LWVTP) but can be released to the Yard Pond. The TBS has a capacity of 30,000 gal and a design discharge release rate of 1,750 gpm per pump. TBS releases are monitored by radiation monitor 0-RM-90-212.

Steam Generator Blowdown

The Steam Generator Blowdown (SGBD) is processed in the Steam Generator Draindown Flash Tanks or SGBD Heat Exchangers. The SGBD discharge has a maximum flow rate of 80 gpm per steam generator. SGBD discharges to the CTBD line are continuous and are monitored by radiation monitors (1) (2)-RM-90-120, -121.

6.1 LIQUID RELEASES

6.1.1 Pre-Release Analysis

To ensure representative sampling, radwaste tanks will be recirculated for a procedurally established length of time, or through two volumes. Periodically, checks will be made to ensure a representative mixing of tank contents. All radwaste tanks will be released as "batch" releases.

33 35

Releases from condensate demineralizer tanks are routinely continuous releases^a and utilize a composite sampler to obtain a representative sample while being discharged. In the event of an inoperable composite sampler, the releases will be made as a batch release, and will be recirculated for a procedurally established length of time or through two volumes to ensure representative sampling.

33 35

Steam generator blowdown and turbine building sump^a are considered continuous and grab sampled daily during releases.

33

Prior to any batch release, a grab sample will be taken and analyzed to determine the concentration, $\mu\text{Ci/ml}$, of each gamma-emitting nuclide. For continuous releases, daily grab or composite samples will be taken on days when releases are being made and analyzed to determine the concentration, $\mu\text{Ci/ml}$, of each gamma-emitting nuclide. Composite samples are maintained during periods of radioactive discharge from all pathways (as required by Table 2.2-1) to determine the concentration of certain nuclides (H-3, Fe-55, Sr-89, Sr-90, and alpha emitters).

33

33

33

For those nuclides whose activities are determined from composite samples, the concentrations for the previous composite period can be assumed as the concentration for the next period to perform the calculations in Sections 6.3 and 6.5. The actual measured concentrations will be used for the dose calculations described in Section 6.6.

^a Sampling requirements for these release points are applicable only during periods of significant primary to secondary leakage or the release of radioactivity as detected by the effluent radiation monitor provided the radiation monitor setpoint is at a LLD of $\leq 1\text{E-}06 \mu\text{Ci/ml}$ and allowing for background radiation during periods when primary to secondary leakage is occurring. Sampling and analysis is routinely performed versus utilizing the radiation monitor at this LLD.

33

33

6.1.2 Effluent Concentration Limits (ECL)-Sum of the Ratios

32

The sum of the ratios (R_j) for each release point will be calculated by the following relationship.

$$R_j = \sum_i \frac{C_i}{ECL_i} \quad (6.1)$$

where:

R_j = the sum of the ratios for release point j.

ECL_i = the ECL of radionuclide i, $\mu\text{Ci/ml}$, from 10 CFR Part 20, Appendix B, Table 2, Column 2.

C_i = concentration of radionuclide i, $\mu\text{Ci/ml}$.

32

The sum of the ECL ratios must be ≤ 10 following dilution at the Cooling Tower Blowdown due to the releases from any or all of the release points described above. The ECL ratios for releases from the Turbine Building Sump will be ≤ 10 at the sump.

32

The following relationship is used to ensure that this criterion is met:

$$R_{TBS} + \frac{f_1 R_1 + f_2 R_2 + f_3 R_3 + f_4 R_4}{F} \leq 10.0 \quad (6.2)$$

where

- R_{TBS} = sum of the ECL ratios of the turbine building sump as determined by equation 6.1. | 32
- f_1, f_2, f_3, f_4 = effluent flow rate for radwaste, condensate demineralizer system and each of the steam generator blowdowns, respectively, gpm. | 33
- R_1, R_2, R_3, R_4 = sum of ECL ratios for radwaste, condensate demineralizer system and each of the steam generator blowdowns, respectively, as determined by equation 6.1. | 32
- F = dilution flow rate for CTBD, routinely 15,000 gpm. | 33

6.1.3 Post-Release Analysis

A post-release evaluation will be done using actual release data to ensure that the limits specified in ODCM Control 1.2.1.1 were not exceeded. This analysis will include an evaluation of the noble gas concentration with regard to ODCM Control 1.2.1.1. | 33

A composite list of concentrations (C_i), by isotope, will be used with the actual waste (f) and dilution (F) flow rates (or volumes) during the release. The data will be evaluated to demonstrate compliance with the limits in ODCM Control 1.2.1.1. | 33

6.2 INSTRUMENT SETPOINTS

Liquid effluent monitor setpoints are determined to ensure that the concentration of radioactive material released at any time from the site to UNRESTRICTED AREAS does not exceed ten times the ECL limits referenced in ODCM Control 1.2.1.1 and to identify any unexpected releases.

6.2.1 Process Discharge Point Monitor Setpoints (0-RE-90-133,134,140,141)

The setpoints for the ERCW monitors (RE-90-133, 134, 140, 141) are set to ensure that the concentration of radioactive materials released at any time from the site do not exceed the limits given in ODCM Control 1.2.1.1. The setpoints for these monitors will be set at a small value above background to ensure that any radioactivity is identified. Site procedures will document and control this value.

6.2.2 Release Point Monitor Setpoints (0-RM-90-122; 0-RM-90-225; 0-RM-90-212; 1,2-RM-90-20,121)

There are five liquid release point effluent monitors: the Liquid Radwaste System radiation monitor 0-RM-90-122; the Condensate Demineralizer System radiation monitor 0-RM-90-225; the Turbine Building Sump radiation monitor 0-RM-90-212; and the Steam Generator Blowdown (SGBD) radiation monitors 1,2-RM-90-120,121.

The batch release points, the Liquid Radwaste System and the Condensate Demineralizer System (if being released in a batch mode), are looking at an undiluted waste stream as it comes out of a tank. The purpose of the monitor setpoints for these batch releases is to identify any release that is larger than expected and would have the potential to exceed the limits after dilution. Setpoints are calculated as described in Section 6.2.3.

The continuous release points, the Condensate Demineralizer System, the Steam Generator Blowdowns, and the Turbine Building Sump, will not be releasing radioactivity unless there is or has been a primary to secondary leak. When there is no identified primary to secondary leakage, these release points are monitored to indicate the presence of elevated activity levels in these systems. The setpoints for these monitors will be set to alarm if the activity in the stream exceeds a routine nominal background. These setpoints are controlled by site instructions.

When there is identified primary to secondary leakage, the continuous release points are monitored to identify any release that is larger than expected and would have the potential to exceed the 10 CFR Part 20 limits after dilution. The monitor setpoints are calculated in the same manner as the batch release point monitor setpoints (described in Section 6.2.3) when this is the case. When these release points are being treated in this manner, a single batch release is defined as all effluent released through this point on a continuous basis for a period of time (usually one week).

6.2.3 Batch Release Point Monitor Setpoint

For each release from a release point, two setpoints are calculated: one based on the monitor response to the contents of the effluent stream; and another based on the predicted response of the monitor to the activity in the release stream if it were large enough to exceed ten times the 10 CFR Part 20 limits after dilution. The expected monitor response, R in cpm, is calculated using equation 6.3 below. The maximum calculated setpoint, S_{max} , is calculated using Equation 6.4 below. A comparison is made between these two calculated setpoints to determine which is used.

The actual monitor setpoint for the release is set equal to X times the expected radioactivity response plus background, or to the maximum calculated setpoint, whichever is less. X is an administrative factor designed to account for expected variations in monitor response (it will be defined in approved plant instructions). The X times expected response setpoint allows for the identification of any release of radioactivity above the expected amount. The maximum calculated setpoint ensures that the release will be stopped if it exceeds ten times the 10 CFR Part 20 concentration limits after dilution.

Expected response

$$R = B + \sum_i \text{Eff}_i \cdot C_i \quad (6.3)$$

where

- B = monitor background, cpm.
- Eff_i = monitor efficiency for nuclide i, cpm per $\mu\text{Ci/ml}$.
- C_i = tank concentration of nuclide i, $\mu\text{Ci/ml}$.

Calculated Maximum Monitor Setpoint

$$S_{\max} = \frac{SF (F_w + (A \cdot F_{\text{dil}}))}{F_w R_j} (R - B) + B \quad (6.4)$$

where

- SF = safety factor for the monitor.
- F_w = flow of waste stream, gpm.
- F_{dil} = flow of the dilution stream, gpm.
- A = fraction of dilution flow allocated to this release point. For the TBS, this fraction is zero. The fractions for the remaining 4 release points are defined as the ratio of the allocated CTBD flow for that release point to the total CTBD flow. The CTBD flow allocation fractions for these release points are routinely:

Radwaste	0.60
Condensate demineralizer	0.20
Steam Generator Blowdown (U1)	0.10
Steam Generator Blowdown (U2)	0.10

NOTE: These allocation factors may be adjusted for a particular release if it is known that there are no releases being made through other release points into the CTBD. For example, if there are no releases being made through the Condensate Demineralizer or either Steam Generator Blowdown, the allocation factor for the Radwaste System may be set equal to one.

- R_j = sum of the ECL ratios for release point j as calculated in Section 6.1.2.
- R = expected monitor response, cpm, as calculated above.
- B = background, cpm.

6.3 CUMULATIVE LIQUID EFFLUENT DOSE CALCULATIONS

Doses due to liquid effluents are calculated for each release for all age groups (adult, teen, child and infant) and organs (bone, liver, total body, thyroid, skin, kidney, lung and GI tract). Pathways considered are ingestion of drinking water, fish consumption and recreation-shoreline. The maximum individual dose from drinking water is assumed to be that calculated at the location immediately downstream from the diffuser. The maximum individual dose from fish ingestion is assumed to be that calculated for the consumption of fish caught anywhere between the plant and the first downstream dam (Chickamauga Dam). The maximum potential recreation dose is calculated for a location immediately downstream of the plant outfall. Dose factors for these age groups and pathways are calculated as described in Section 6.7. For pathways with no age or organ specific dose factors (i.e. shoreline recreation), the total body dose will be added to the internal organ doses for all age groups.

The general equation for the dose calculations is:

$$\text{Dose} = \sum_i A_{it} T C_i D \quad (6.5)$$

where:

- A_{it} = the total dose factor to the total body or any organ t for nuclide i , mrem/hr per $\mu\text{Ci/ml}$. The total dose factor is the sum of the dose factors for water ingestion, fish ingestion, and shoreline recreation, as defined in Section 6.7.
- T = the length of time period over which the concentrations and the flows are averaged for the liquid release, hours.
- C_i = the average concentration of radionuclide i , in undiluted liquid effluent during the time period T from any liquid release, $\mu\text{Ci/ml}$.
- D = the near field average dilution factor for C_i during any effluent release. D is calculated by the following equation:

$$D = \frac{\text{FLOW}_w}{0.60 \text{ RF}}$$

where:

- FLOW_w = maximum undiluted liquid waste flow during the release, cfs. For TBS releases, this term is the diluted waste flow into the pond.
- 0.60 = mixing factor of effluent in river, defined as the percentage of the riverflow which is available for dilution of the release.
- RF = default riverflow, cfs. For each release, this value is set to 7900 cfs (the lowest average quarterly riverflow recorded from the period 1978-1988).

From the four age groups considered, the maximum is determined by comparing all organ doses for all age groups. The age group with the highest single organ dose is selected as the critical age group. The total body and maximum organ doses for the critical age group are used in the calculation of the monthly dose described in Section 6.3.1.

6.3.1 Monthly Dose Calculations

At the end of each month, the actual average riverflow for the month is used to recalculate the liquid doses. The monthly cumulative dose is defined as the sum of the doses for the critical age group for each release during the month. Thus, the monthly cumulative dose will be a conservative value, consisting of doses belonging to various age groups depending on the mix of radionuclides. These doses are multiplied by the ratio of the default riverflow (7900 cfs) to the actual monthly average riverflow to obtain the monthly dose. The total body and maximum organ doses determined in this manner are then used to determine the cumulative quarterly and annual doses described in Section 6.3.2, and for the dose projections described in Section 6.5.

6.3.2 Cumulative Doses

Quarterly and annual sums of all doses are determined at the end of each month to compare to the limits given in ODCM Control 1.2.1.2. These quarterly and annual sums will be the sum of the monthly cumulative doses described in Section 6.3.1 for the appropriate months in the quarter or year. These doses will be used in the comparison to the limits.

6.3.3 Comparison to Limits

The cumulative calendar quarter and calendar year doses are compared to the limits in ODCM Control 1.2.1.2 once per 31 days to determine compliance.

6.4 LIQUID RADWASTE TREATMENT SYSTEM

The liquid radwaste treatment system described below shall be maintained and operated to keep releases ALARA.

A flow diagram for the LRTS is given in Figure 6.2. The system consists of one reactor coolant drain tank with two pumps and a floor and equipment drain sump inside the containment of each unit and the following shared equipment inside the auxiliary building: one sump tank and pumps, one tritiated drain collector tank with two pumps and one filter, one floor drain collector tank with two pumps and one filter, a waste condensate tank filter, three waste condensate tanks and two pumps, a chemical drain tank and pump, two laundry and hot shower tanks and pump, a spent resin storage tank, a cask decontamination tank with two pumps and two filters, Auxiliary Building floor end equipment drain sump and pumps, and evaporator with two distillate tanks, a Mobile Waste Demineralizer System (if needed) and the associated piping, valves and instrumentation.

6.5 DOSE PROJECTIONS

In accordance with ODCM Surveillance Requirement 2.2.1.3, dose projections will be performed by averaging the two previous month's doses as determined in Section 6.3.1. To determine compliance with the limits, these averages are assigned as the dose projections for the upcoming month.

The projected doses are compared to the limits of ODCM Control 1.2.1.3. If the projected doses exceed either of these limits, the liquid radwaste treatment system shall be used to reduce the radioactive materials in liquid wastes prior to their discharge to UNRESTRICTED AREAS.

6.6 QUARTERLY DOSE CALCULATIONS

A complete dose analysis utilizing the total estimated liquid releases for each calendar quarter will be performed and reported as required in ODCM Administrative Control 5.2. Methodology for this analysis is that which is described in this section using the quarterly release values reported by the plant personnel. The releases are assumed, for this calculation, to be continuous over the 90 day period.

The average dilution factor, D, used for the quarterly calculations is:

$$D = \frac{1}{RF \cdot 0.60} \quad \text{(for receptors upstream of Chickamauga Dam)} \quad (6.6)$$

and

$$D = \frac{1}{RF} \quad \text{(for receptors downstream of Chickamauga Dam)} \quad (6.7)$$

where:

RF = the average actual riverflow for the location at which the dose is being determined, cfs.

0.60 = the fraction of the riverflow available for dilution in the near field, dimensionless.

6.6.1 WATER INGESTION

Water ingestion doses are calculated for each water supply identified within a 50 mile radius downstream of SQN (Table 6.1). Water ingestion doses are calculated for the total body and each internal organ as described below:

$$D_{org} = 10^6 \cdot 9.80E-09 \cdot A_{WR} \cdot Q_i \cdot D \cdot \exp(-8.64E+04 \cdot \lambda_i \cdot t_d) \quad (6.8)$$

where

10^6 = conversion factor, $\mu\text{Ci}/\text{Ci}$.

$9.80E-09$ = conversion factor, cfs per ml/h.

A_{WR} = dose factor for water ingestion for nuclide i, age group t, mrem/h per $\mu\text{Ci}/\text{ml}$, as calculated in Section 6.7.1.

Q_i = Quantity of nuclide i released during the quarter, Ci.

D = dilution factor, as described above, cfs^{-1} .

λ_i = radiological decay constant of nuclide i, s^{-1} (Table 6.2).

t_d = decay time for water ingestion, equal to the travel time from the plant to the water supply plus one day to account for the time of processing at the water supply (per Regulatory Guide 1.109), d.

$8.64E+04$ = conversion factor, seconds per day.

6.6.2 FISH INGESTION

Fish ingestion doses are calculated for each identified reach within a 50 mile radius downstream of SQN (Table 6.1). Individual fish ingestion doses are calculated for the total body and each internal organ as described below:

$$D_{org} = 10^6 9.80E-09 0.25 A_{Fit} Q_i D \exp(-8.64E+04 \lambda_i t_d) \quad (6.9)$$

where

- 10^6 = conversion factor, $\mu\text{Ci}/\text{Ci}$.
- $9.80E-09$ = conversion factor, cfs per ml/h.
- 0.25 = fraction of the yearly fish consumption eaten in one quarter, dimensionless.
- A_{Fit} = dose factor for fish ingestion for nuclide i , age group t , mrem/h per $\mu\text{Ci}/\text{ml}$, as calculated in Section 6.7.2.
- Q_i = Quantity of nuclide i released during the quarter, Ci.
- D = dilution factor, as described above, cfs^{-1} .
- λ_i = radiological decay constant of nuclide i , s^{-1} (Table 6.2).
- t_d = decay time for fish ingestion, equal to the travel time from the plant to the center of the reach plus one day to account for transit through the food chain and food preparation time (per Regulatory Guide 1.109), d.
- $8.64E+04$ = conversion factor, seconds per day.

6.6.3 SHORELINE RECREATION

Recreation doses are calculated for each identified reach within a 50 mile radius downstream of SQN (Table 6.1). It is assumed that the maximum exposed individual spends 500 hours per year on the shoreline at a location immediately downstream from the diffusers. Individual recreation shoreline doses are calculated for the total body and skin as described below:

$$D_{org} = 10^6 9.80E-09 rf A_{Rit} Q_i D \exp(-8.64E+04 \lambda_i t_d) \quad (6.10)$$

where

- 10^6 = conversion factor, $\mu\text{Ci}/\text{Ci}$.
- $9.80E-09$ = conversion factor, cfs per ml/h.
- rf = recreation factor, used to account for the fact that the same amount of time will not be spent at a recreation site during each quarter. Recreation factors used are:
1st quarter - 0.1 2nd quarter - 0.3 3rd quarter - 0.4 4th quarter - 0.2.
- A_{Rit} = dose factor for shoreline recreation for nuclide i , age group t , mrem/h per $\mu\text{Ci}/\text{ml}$, as calculated in Section 6.7.3.
- Q_i = quantity of nuclide i released during the quarter, Curies.
- D = dilution factor, as described above, cfs^{-1} .
- λ_i = radiological decay constant of nuclide i , s^{-1} (Table 6.2).
- t_d = decay time for recreation, equal to the travel time from the plant to the center of the reach, d.
- $8.64E+04$ = conversion factor, seconds per day.

6.6.4 TOTAL MAXIMUM INDIVIDUAL DOSE

The total maximum individual total body dose is obtained by summing the following for each age group: the highest total body water ingestion dose from among all the public water supplies; the highest total body fish ingestion dose from among all the reaches; and the total body maximum shoreline recreation dose. The total maximum individual organ dose is obtained by summing the following for each organ and each age group: that organ's highest water ingestion dose from among all the public water supplies; that organ's highest fish ingestion dose from among all the reaches; and the total body maximum shoreline recreation dose. The total maximum individual skin dose is that skin dose calculated for the maximum shoreline dose.

6.6.5 POPULATION DOSES

For determining population doses to the 50-mile population around the plant, an average dose is calculated for each age group and each pathway and then multiplied by the population.

For water ingestion, the general equation used for calculating the population doses, POPWTR, in man-rem for a given PWS is:

$$POPWTR_t = 10^{-3} \sum_{m=1}^5 POP_m \sum_{a=1}^4 POP_a ATMW_a TWDOS_{amt} \quad (6.11)$$

where:

$POPWTR_t$ = water ingestion population dose to organ t, man-rem.

POP_a = fraction of population in each age group a (from NUREG CR-1004, table 3.39).

Adult = 0.665

Child = 0.168

Infant = 0.015

Teen = 0.153

POP_m = population at PWS m. The 4 PWSs and their populations are listed in Table 6.1.

$ATMW_a$ = ratio of average to maximum water ingestion rates for each age group a. Maximum water ingestion rates are given in Table 6.3. Average water ingestion rates, in l/year, (from R.G. 1.109 Table E-4) are:

Adult = 370

Child = 260

Infant = 260

Teen = 260

$TWDOS_{amt}$ = total individual water ingestion dose to organ t at PWS m, to the age group a, as described in Section 6.6.1, mrem.

10^{-3} = conversion factor for rem/mrem.

For population doses resulting from fish ingestion the calculation assumes that all fish caught within a 50-mile radius downstream of SQN are consumed by local population. An additional 7-day decay term is added due to distribution time of sport fish. The general equation for calculating population doses, POPF, in man-rem from fish ingestion of all fish caught within a 50-mile radius downstream is:

$$POPF_t = \frac{453.6 \text{ HVST APR}}{10^3 10^3} \sum_{r=1}^4 \sum_{a=1}^3 \frac{TFDOS_{art} POP_a}{FISH_a POP_a} \quad (6.12)$$

where:

$POPF_t$ = total fish ingestion population dose to organ t, man-rem.

HVST = fish harvest for the Tennessee River, 3.04 lbs/acre/y.

APR = size of reach, acres (Table 6.1).

$TFDOS_{art}$ = total fish ingestion dose to organ t for reach r, for the age group a, as described in Section 6.6.2, mrem.

POP_a = fraction of population in each age group a, as given above.

$FISH_a$ = amount of fish ingested by each age group a, kg/y. Average fish ingestion rates (R.G. 1.109 Table E-4) are:

Adult = 6.9

Child = 2.2

Teen = 5.2

453.6 = conversion factor, g/lb.

10^3 = conversion factor, mrem/rem.

10^3 = conversion factor, g/kg.

For recreation shoreline, the general equation used for calculating the population doses, POPR, in man-rem is:

$$POPR_t = \frac{REQFRA}{10^3 \cdot 8760} \sum_{r=1}^4 TSHDOS_{rt} SHVIS_r HRSVIS_r \quad (6.13)$$

where:

- POPR_t = total recreation population dose for all reaches to organ t, man-rem.
- REQFRA = fraction of yearly recreation which occurs in that quarter, as given in Section 6.6.3.
- TSHDOS_{rt} = total shoreline dose rate for organ t, in reach r, mrem/h.
- SHVIS_r = shoreline visits per year at each reach r, (Table 6.1).
- HRSVIS_r = length of shoreline recreation visit at reach r, 5 hours.
- 10³ = conversion factor, mrem/rem.
- 8760 = conversion factor, hours per year.

6.7 LIQUID DOSE FACTOR EQUATIONS

6.7.1 WATER INGESTION

A_{WR} (mrem/h per $\mu\text{Ci}/\text{ml}$)

$$A_{WR} = \frac{DF_{Liat} U_{wa} 10^6 10^3}{8760}$$

where:

DF_{Liat} = ingestion dose conversion factor for nuclide i, age group a, organ t, mrem/pCi, (Table 6.4).

U_{wa} = water consumption rate for age group a, L/y, (Table 6.3).

10^6 = conversion factor, pCi/ μCi .

10^3 = conversion factor, ml/l.

8760 = conversion factor, hours per year.

6.7.2 FISH INGESTION

A_{FR} (mrem/h per $\mu\text{Ci}/\text{ml}$)

$$A_{FR} = \frac{DF_{Liat} U_{fa} B_i 10^6 10^3}{8760}$$

where:

DF_{Liat} = ingestion dose conversion factor for nuclide i, age group a, organ t, mrem/pCi, (Table 6.4).

U_{fa} = fish consumption rate for age group a, kg/y, (Table 6.3).

B_i = bioaccumulation factor for nuclide i, pCi/kg per pCi/L, (Table 6.5).

10^6 = conversion factor, pCi/ μCi .

10^3 = conversion factor, ml/L.

8760 = conversion factor, hours per year.

6.7.3 SHORELINE RECREATION

A_{RR} (mrem/h per $\mu\text{Ci}/\text{ml}$).

$$A_{RR} = \frac{DF_{GR} K_c M W 10^3 10^6 U}{8760 * 3600 \lambda_i} [1 - \exp(-\lambda_i t_b)]$$

where:

DF_{GR} = dose conversion factor for standing on contaminated ground for nuclide i and organ t (total body and skin), mrem/h per pCi/m², (Table 6.6).

K_c = transfer coefficient from water to shoreline sediment, L/kg-h, (Table 6.3).

M = mass density of sediment, kg/m², (Table 6.3).

W = shoreline width factor, dimensionless, (Table 6.3).

10^3 = conversion factor, ml/L.

10^6 = conversion factor, pCi/ μCi .

3600 = conversion factor, s/h.

λ_i = decay constant for nuclide i, s⁻¹, (Table 6.2).

t_b = time shoreline is exposed to the concentration on the water, s, (Table 6.3).

U = usage factor, 500 h/y.

8760 = conversion factor, hours per year.

Table 6.1 RECEPTORS FOR LIQUID DOSE CALCULATIONS

Tennessee River Reaches Within 50 Mile Radius Downstream of SQN

<u>Name</u>	<u>Beginning TRM</u>	<u>Ending TRM</u>	<u>Size (acres)</u>	<u>Recreation visits/year</u>
Chickamauga Lake below SQN	484.0	471.0	9939	5,226,700
Nickajack Lake (Part 1)	471.0	435.0	5604	240,700
Nickajack Lake (Part 2)	435.0	425.0	5326	607,600
Guntersville Lake	425.0	400.0	6766	104,000

Public Water Supplies Within 50 Mile Radius Downstream of SQN

<u>Name</u>	<u>TRM</u>	<u>Population</u>
E. I. DuPont	469.9	1,400
Chattanooga, TN	465.3	224,000
South Pittsburg, TN	418.0	4,898
Bridgeport, AL	413.6	4,650

Table 6.2 RADIONUCLIDE DECAY AND STABLE ELEMENT TRANSFER DATA

(Page 1 of 3)

	Half-Life (minutes)	λ (1/s)	B_{IV}	F_{mi} (cow)	F_{mi} (goat)	F_{fi} (beef)
H-3	6.46E+06	1.79E-09	4.80E+00	1.00E-02	1.70E-01	1.20E-02
C-14	3.01E+09	3.84E-12	5.50E+00	1.20E-02	1.00E-01	3.10E-02
Na-24	9.00E+02	1.28E-05	5.20E-02	4.00E-02	4.00E-02	3.00E-02
P-32	2.06E+04	5.61E-07	1.10E+00	2.50E-02	2.50E-01	4.60E-02
Cr-51	3.99E+04	2.90E-07	2.50E-04	2.20E-03	2.20E-03	2.40E-03
Mn-54	4.50E+05	2.57E-08	2.90E-02	2.50E-04	2.50E-04	8.00E-04
Mn-56	1.55E+02	7.45E-05	2.90E-02	2.50E-04	2.50E-04	8.00E-04
Fe-55	1.42E+06	8.13E-09	6.60E-04	1.20E-03	1.30E-04	1.20E-02
Fe-59	6.43E+04	1.80E-07	6.60E-04	1.20E-03	1.30E-04	1.20E-02
Co-57	3.90E+05	2.96E-08	9.40E-03	1.00E-03	1.00E-03	1.30E-02
Co-58	1.02E+05	1.13E-07	9.40E-03	1.00E-03	1.00E-03	1.30E-02
Co-60	2.77E+06	4.17E-09	9.40E-03	1.00E-03	1.00E-03	1.30E-02
Ni-63	5.27E+07	2.19E-10	1.90E-02	6.70E-03	6.70E-03	5.30E-02
Ni-65	1.51E+02	7.65E-05	1.90E-02	6.70E-03	6.70E-03	5.30E-02
Cu-64	7.62E+02	1.52E-05	1.20E-01	1.40E-02	1.30E-02	9.70E-04
Zn-65	3.52E+05	3.28E-08	4.00E-01	3.90E-02	3.90E-02	3.00E-02
Zn-69m	8.26E+02	1.40E-05	4.00E-01	3.90E-02	3.90E-02	3.00E-02
Zn-69	5.56E+01	2.08E-04	4.00E-01	3.90E-02	3.90E-02	3.00E-02
Br-82	2.12E+03	5.45E-06	7.60E-01	5.00E-02	5.00E-02	2.60E-02
Br-83	1.43E+02	8.08E-05	7.60E-01	5.00E-02	5.00E-02	2.60E-02
Br-84	3.18E+01	3.63E-04	7.60E-01	5.00E-02	5.00E-02	2.60E-02
Br-85	2.87E+00	4.02E-03	7.60E-01	5.00E-02	5.00E-02	2.60E-02
Rb-86	2.69E+04	4.29E-07	1.30E-01	3.00E-02	3.00E-02	3.10E-02
Rb-88	1.78E+01	6.49E-04	1.30E-01	3.00E-02	3.00E-02	3.10E-02
Rb-89	1.54E+01	7.50E-04	1.30E-01	3.00E-02	3.00E-02	3.10E-02
Sr-89	7.28E+04	1.59E-07	1.70E-02	1.40E-03	1.40E-02	6.00E-04
Sr-90	1.50E+07	7.70E-10	1.70E-02	1.40E-03	1.40E-02	6.00E-04
Sr-91	5.70E+02	2.03E-05	1.70E-02	1.40E-03	1.40E-02	6.00E-04
Sr-92	1.63E+02	7.09E-05	1.70E-02	1.40E-03	1.40E-02	6.00E-04
Y-90	3.85E+03	3.00E-06	2.60E-03	1.00E-05	1.00E-05	4.60E-03
Y-91m	4.97E+01	2.32E-04	2.60E-03	1.00E-05	1.00E-05	4.60E-03
Y-91	8.43E+04	1.37E-07	2.60E-03	1.00E-05	1.00E-05	4.60E-03
Y-92	2.12E+02	5.45E-05	2.60E-03	1.00E-05	1.00E-05	4.60E-03
Y-93	6.06E+02	1.91E-05	2.60E-03	1.00E-05	1.00E-05	4.60E-03
Zr-95	9.22E+04	1.25E-07	1.70E-04	5.00E-06	5.00E-06	3.40E-02
Zr-97	1.01E+03	1.14E-05	1.70E-04	5.00E-06	5.00E-06	3.40E-02
Nb-95	5.05E+04	2.29E-07	9.40E-03	2.50E-03	2.50E-03	2.80E-01
Nb-97	7.21E+01	1.60E-04	9.40E-03	2.50E-03	2.50E-03	2.80E-01
Mo-99	3.96E+03	2.92E-06	1.20E-01	7.50E-03	7.50E-03	1.10E-03
Tc-99m	3.61E+02	3.20E-05	2.50E-01	2.50E-02	2.50E-02	4.00E-01
Tc-101	1.42E+01	8.13E-04	2.50E-01	2.50E-02	2.50E-02	4.00E-01
Ru-103	5.67E+04	2.04E-07	5.00E-02	1.00E-06	1.00E-06	4.00E-01
Ru-105	2.66E+02	4.34E-05	5.00E-02	1.00E-06	1.00E-06	4.00E-01
Ru-106	5.30E+05	2.18E-08	5.00E-02	1.00E-06	1.00E-06	4.00E-01

Table 6.2 RADIONUCLIDE DECAY AND STABLE ELEMENT TRANSFER DATA
(Page 2 of 3)

	Half-Life (minutes)	λ (1/s)	B_N	F_{mi} (cow)	F_{mi} (goat)	F_f (beef)
Ag-110m	3.60E+05	3.21E-08	1.50E-01	5.00E-02	5.00E-02	1.70E-02
Sb-124	8.67E+04	1.33E-07	N/A	1.50E-03	1.50E-03	N/A
Sb-125	1.46E+06	7.91E-09	N/A	1.50E-03	1.50E-03	N/A
Sn-125	1.39E+04	8.32E-07	N/A	N/A	N/A	N/A
Te-125m	8.35E+04	1.38E-07	1.30E+00	1.00E-03	1.00E-03	7.70E-02
Te-127m	1.57E+05	7.36E-08	1.30E+00	1.00E-03	1.00E-03	7.70E-02
Te-127	5.61E+02	2.06E-05	1.30E+00	1.00E-03	1.00E-03	7.70E-02
Te-129m	4.84E+04	2.39E-07	1.30E+00	1.00E-03	1.00E-03	7.70E-02
Te-129	6.96E+01	1.66E-04	1.30E+00	1.00E-03	1.00E-03	7.70E-02
Te-131m	1.80E+03	6.42E-06	1.30E+00	1.00E-03	1.00E-03	7.70E-02
Te-131	2.50E+01	4.62E-04	1.30E+00	1.00E-03	1.00E-03	7.70E-02
Te-132	4.69E+03	2.46E-06	1.30E+00	1.00E-03	1.00E-03	7.70E-02
I-130	7.42E+02	1.56E-05	2.00E-02	1.20E-02	4.30E-01	2.90E-03
I-131	1.16E+04	9.96E-07	2.00E-02	1.20E-02	4.30E-01	2.90E-03
I-132	1.38E+02	8.37E-05	2.00E-02	1.20E-02	4.30E-01	2.90E-03
I-133	1.25E+03	9.24E-06	2.00E-02	1.20E-02	4.30E-01	2.90E-03
I-134	5.26E+01	2.20E-04	2.00E-02	1.20E-02	4.30E-01	2.90E-03
I-135	3.97E+02	2.91E-05	2.00E-02	1.20E-02	4.30E-01	2.90E-03
Cs-134	1.08E+06	1.06E-08	1.00E-02	8.00E-03	3.00E-01	1.50E-02
Cs-136	1.90E+04	6.08E-07	1.00E-02	8.00E-03	3.00E-01	1.50E-02
Cs-137	1.59E+07	7.26E-10	1.00E-02	8.00E-03	3.00E-01	1.50E-02
Cs-138	3.22E+01	3.59E-04	1.00E-02	8.00E-03	3.00E-01	1.50E-02
Ba-139	8.31E+01	1.39E-04	5.00E-03	4.00E-04	4.00E-04	3.20E-03
Ba-140	1.84E+04	6.28E-07	5.00E-03	4.00E-04	4.00E-04	3.20E-03
Ba-141	1.83E+01	6.31E-04	5.00E-03	4.00E-04	4.00E-04	3.20E-03
Ba-142	1.07E+01	1.08E-03	5.00E-03	4.00E-04	4.00E-04	3.20E-03
La-140	2.41E+03	4.79E-06	2.50E-03	5.00E-06	5.00E-06	2.00E-04
La-142	9.54E+01	1.21E-04	2.50E-03	5.00E-06	5.00E-06	2.00E-04
Ce-141	4.68E+04	2.47E-07	2.50E-03	1.00E-04	1.00E-04	1.20E-03
Ce-143	1.98E+03	5.83E-06	2.50E-03	1.00E-04	1.00E-04	1.20E-03
Ce-144	4.09E+05	2.82E-08	2.50E-03	1.00E-04	1.00E-04	1.20E-03
Pr-143	1.95E+04	5.92E-07	2.50E-03	5.00E-06	5.00E-06	4.70E-03
Pr-144	1.73E+01	6.68E-04	2.50E-03	5.00E-06	5.00E-06	4.70E-03
Nd-147	1.58E+04	7.31E-07	2.40E-03	5.00E-06	5.00E-06	3.30E-03
W-187	1.43E+03	8.08E-06	1.80E-02	5.00E-04	5.00E-04	1.30E-03
Np-239	3.39E+03	3.41E-06	2.50E-03	5.00E-06	5.00E-06	2.00E-04
Ar-41	1.10E+02	1.05E-04	N/A	N/A	N/A	N/A
Kr-83m	1.10E+02	1.05E-04	N/A	N/A	N/A	N/A
Kr-85m	2.69E+02	4.29E-05	N/A	N/A	N/A	N/A
Kr-85	5.64E+06	2.05E-09	N/A	N/A	N/A	N/A
Kr-87	7.63E+01	1.51E-04	N/A	N/A	N/A	N/A
Kr-88	1.70E+02	6.79E-05	N/A	N/A	N/A	N/A
Kr-89	3.16E+00	3.66E-03	N/A	N/A	N/A	N/A
Kr-90	5.39E-01	2.14E-02	N/A	N/A	N/A	N/A
Xe-131m	1.70E+04	6.79E-07	N/A	N/A	N/A	N/A

Table 6.2 RADIONUCLIDE DECAY AND STABLE ELEMENT TRANSFER DATA
(Page 3 of 3)

	Half-Life (minutes)	λ (1/s)	B_{iv}	F_{mi} (cow)	F_{mi} (goat)	F_{fi} (beef)
Xe-133m	3.15E+03	3.67E-06	N/A	N/A	N/A	N/A
Xe-133	7.55E+03	1.53E-06	N/A	N/A	N/A	N/A
Xe-135m	1.54E+01	7.50E-04	N/A	N/A	N/A	N/A
Xe-135	5.47E+02	2.11E-05	N/A	N/A	N/A	N/A
Xe-137	3.83E+00	3.02E-03	N/A	N/A	N/A	N/A
Xe-138	1.41E+01	8.19E-04	N/A	N/A	N/A	N/A

References:

Half lives for all nuclides: DOE-TIC-11026, "Radioactive Decay Data Tables - A handbook of Decay Data for Application to Radiation Dosimetry and Radiological Assessment," D. C. Kocher, 1981.

Transfer factors for Sb- isotopes are from ORNL 4992, "Methodology for Calculating Radiation Doses from Radioactivity Released to the Environment," March 1976, Table 2-7.

Cow-milk transfer factors for Iodine, Strontium, and Cesium nuclides are from NUREG/CR-1004, Table 3.17.

Goat-milk transfer factors for Iodine nuclides are from NUREG/CR-1004, Table 3.17.

Beef transfer factors for Iron, Copper, Molybdenum, and Cesium nuclides are from NUREG/CR-1004, Table 3.18.

All other nuclides' transfer factors are from Regulatory Guide 1.109, Tables E-1 and E-2.

Table 6.3 DOSE CALCULATION FACTORS
(Page 1 of 2)

Factor	Value	Units	Reference
BR _a (infant)	1400	m ³ /year	ICRP 23
BR _a (child)	5500	m ³ /year	ICRP 23
BR _a (teen)	8000	m ³ /year	ICRP 23
BR _a (adult)	8100	m ³ /year	ICRP 23
f _g	1		TVA Assumption
f _L	1		R. G. 1.109 (Table E-15)
f _p	1		TVA Assumption
f _s	0		TVA Assumption
H	9	g/m ³	TVA Value
K _c	0.072	L/kg-h	R. G. 1.109 (Section 2.C.)
M	40	kg/m ²	R. G. 1.109 (Section 2.C.)
P	240	kg/m ²	R. G. 1.109 (Table E-15)
Q _f (cow)	64	kg/d	NUREG/CR-1004 (Sect. 3.4)
Q _f (goat)	08	kg/d	NUREG/CR-1004 (Sect. 3.4)
r	0.47		NUREG/CR-1004 (Sect. 3.2)
t _b	4.73E+08 (15 years)	seconds	R. G. 1.109 (Table E-15)
t _{cb}	7.78E+06 (90 days)	seconds	SQN FSAR Section 11.3.9.1
t _{csf}	1.56E+07 (180 days)	seconds	SQN FSAR Section 11.3.9.1
t _e	5.18E+06 (60 days)	seconds	R. G. 1.109 (Table E-15)
t _{ep}	2.59E+06 (30 days)	seconds	R. G. 1.109 (Table E-15)
t _{esf}	7.78E+06 (90 days)	seconds	R. G. 1.109 (Table E-15)
t _{fm}	8.64E+04 (1 day)	seconds	SQN FSAR Section 11.3.9.1
t _{hc}	8.64E+04 (1 day)	seconds	NUREG/CR-1004, Table 3.40
t _s	1.12E+06 (13 days)	seconds	NUREG/CR-1004, Table 3.40
t _{sv}	2.38E+07 (275 days)	seconds	SQN FSAR Section 11.3.9.1
U _{am} (infant)	0	kg/year	R. G. 1.109 (Table E-5)
U _{am} (child)	41	kg/year	R. G. 1.109 (Table E-5)
U _{am} (teen)	65	kg/year	R. G. 1.109 (Table E-5)
U _{am} (adult)	110	kg/year	R. G. 1.109 (Table E-5)
U _{ap} (infant)	330	l/year	R. G. 1.109 (Table E-5)
U _{ap} (child)	330	l/year	R. G. 1.109 (Table E-5)
U _{ap} (teen)	400	l/year	R. G. 1.109 (Table E-5)
U _{ap} (adult)	310	l/year	R. G. 1.109 (Table E-5)
U _{fa} (infant)	0	kg/year	R. G. 1.109 (Table E-5)
U _{fa} (child)	6.9	kg/year	R. G. 1.109 (Table E-5)
U _{fa} (teen)	16	kg/year	R. G. 1.109 (Table E-5)

Table 6.3 DOSE CALCULATION FACTORS
(Page 2 of 2)

Factor	Value	Units	Reference
U_{fa} (adult)	21	kg/year	R. G. 1.109 (Table E-5)
U_{fa} (infant)	0	kg/year	R. G. 1.109 (Table E-5)
U_{fa} (child)	26	kg/year	R. G. 1.109 (Table E-5)
U_{fa} (teen)	42	kg/year	R. G. 1.109 (Table E-5)
U_{fa} (adult)	64	kg/year	R. G. 1.109 (Table E-5)
U_{sa} (infant)	0	kg/year	R. G. 1.109 (Table E-5)
U_{sa} (child)	520	kg/year	R. G. 1.109 (Table E-5)
U_{sa} (teen)	630	kg/year	R. G. 1.109 (Table E-5)
U_{sa} (adult)	520	kg/year	R. G. 1.109 (Table E-5)
U_{wa} (infant)	330	L/year	R. G. 1.109 (Table E-5)
U_{wa} (child)	510	L/year	R. G. 1.109 (Table E-5)
U_{wa} (teen)	510	L/year	R. G. 1.109 (Table E-5)
U_{wa} (adult)	730	L/year	R. G. 1.109 (Table E-5)
W	0.3	none	R. G. 1.109 (Table A-2)
Y_f	1.85	kg/m ²	NUREG/CR-1004 (Table 3.4)
Y_p	1.18	kg/m ²	NUREG/CR-1004 (Table 3.3)
Y_{sf}	0.64	kg/m ²	NUREG/CR-1004 (Table 3.3)
Y_{sv}	0.57	kg/m ²	NUREG/CR-1004 (Table 3.4)
			(value selected is for non-leafy vegetables)
λ_w (iodines)	7.71E-07 (10.4 d half-life)	sec ⁻¹	NUREG/CR-1004 (Table 3.10)
λ_w (particulates)	5.21E-07 (15.4 d half-life)	sec ⁻¹	NUREG/CR-1004 (Table 3.10)

Table 6.4 INGESTION DOSE FACTORS
(Page 1 of 8)
(mrem/pCi ingested)

	ADULT						
	bone	liver	t body	thyroid	kidney	lung	gi-iii
H-3	1.05E-07	1.05E-07	1.05E-07	1.05E-07	1.05E-07	1.05E-07	1.05E-07
C-14	2.84E-06	5.68E-07	5.68E-07	5.68E-07	5.68E-07	5.68E-07	5.68E-07
Na-24	1.70E-06	1.70E-06	1.70E-06	1.70E-06	1.70E-06	1.70E-06	1.70E-06
P-32	1.93E-04	1.20E-05	7.46E-06	0.00E+00	0.00E+00	0.00E+00	2.17E-05
Cr-51	0.00E+00	0.00E+00	2.66E-09	1.59E-09	5.86E-10	3.53E-09	6.69E-07
Mn-54	0.00E+00	4.57E-06	8.72E-07	0.00E+00	1.36E-06	0.00E+00	1.40E-05
Mn-56	0.00E+00	1.15E-07	2.04E-08	0.00E+00	1.46E-07	0.00E+00	3.67E-06
Fe-55	2.75E-06	1.90E-06	4.43E-07	0.00E+00	0.00E+00	1.06E-06	1.09E-06
Fe-59	4.34E-06	1.02E-05	3.91E-06	0.00E+00	0.00E+00	2.85E-06	3.40E-05
Co-57	0.00E+00	1.75E-07	2.91E-07	0.00E+00	0.00E+00	0.00E+00	4.44E-06
Co-58	0.00E+00	7.45E-07	1.67E-06	0.00E+00	0.00E+00	0.00E+00	1.51E-05
Co-60	0.00E+00	2.14E-06	4.72E-06	0.00E+00	0.00E+00	0.00E+00	4.02E-05
Ni-63	1.30E-04	9.01E-06	4.36E-06	0.00E+00	0.00E+00	0.00E+00	1.88E-06
Ni-65	5.28E-07	6.86E-08	3.13E-08	0.00E+00	0.00E+00	0.00E+00	1.74E-06
Cu-64	0.00E+00	8.33E-08	3.91E-08	0.00E+00	2.10E-07	0.00E+00	7.10E-06
Zn-65	4.84E-06	1.54E-05	6.96E-06	0.00E+00	1.03E-05	0.00E+00	9.70E-06
Zn-69	1.03E-08	1.97E-08	1.37E-09	0.00E+00	1.28E-08	0.00E+00	2.96E-09
Zn-69m	1.70E-07	4.08E-07	3.73E-08	0.00E+00	2.47E-07	0.00E+00	2.49E-05
Br-82	0.00E+00	0.00E+00	2.26E-06	0.00E+00	0.00E+00	0.00E+00	2.59E-06
Br-83	0.00E+00	0.00E+00	4.02E-08	0.00E+00	0.00E+00	0.00E+00	5.79E-08
Br-84	0.00E+00	0.00E+00	5.21E-08	0.00E+00	0.00E+00	0.00E+00	4.09E-13
Br-85	0.00E+00	0.00E+00	2.14E-09	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Rb-86	0.00E+00	2.11E-05	9.83E-06	0.00E+00	0.00E+00	0.00E+00	4.16E-06
Rb-88	0.00E+00	6.05E-08	3.21E-08	0.00E+00	0.00E+00	0.00E+00	8.36E-19
Rb-89	0.00E+00	4.01E-08	2.82E-08	0.00E+00	0.00E+00	0.00E+00	2.33E-21
Sr-89	3.08E-04	0.00E+00	8.84E-06	0.00E+00	0.00E+00	0.00E+00	4.94E-05
Sr-90	7.58E-03	0.00E+00	1.86E-03	0.00E+00	0.00E+00	0.00E+00	2.19E-04
Sr-91	5.67E-06	0.00E+00	2.29E-07	0.00E+00	0.00E+00	0.00E+00	2.70E-05
Sr-92	2.15E-06	0.00E+00	9.30E-08	0.00E+00	0.00E+00	0.00E+00	4.26E-05
Y-90	9.62E-09	0.00E+00	2.58E-10	0.00E+00	0.00E+00	0.00E+00	1.02E-04
Y-91m	9.09E-11	0.00E+00	3.52E-12	0.00E+00	0.00E+00	0.00E+00	2.67E-10
Y-91	1.41E-07	0.00E+00	3.77E-09	0.00E+00	0.00E+00	0.00E+00	7.76E-05
Y-92	8.45E-10	0.00E+00	2.47E-11	0.00E+00	0.00E+00	0.00E+00	1.48E-05
Y-93	2.68E-09	0.00E+00	7.40E-11	0.00E+00	0.00E+00	0.00E+00	8.50E-05
Zr-95	3.04E-08	9.75E-09	6.60E-09	0.00E+00	1.53E-08	0.00E+00	3.09E-05
Zr-97	1.68E-09	3.39E-10	1.55E-10	0.00E+00	5.12E-10	0.00E+00	1.05E-04
Nb-95	6.22E-09	3.46E-09	1.86E-09	0.00E+00	3.42E-09	0.00E+00	2.10E-05
Nb-97	5.22E-11	1.32E-11	4.82E-12	0.00E+00	1.54E-11	0.00E+00	4.87E-08
Mn-99	0.00E+00	4.31E-06	8.20E-07	0.00E+00	9.76E-06	0.00E+00	9.99E-06
Tc-99m	2.47E-10	6.98E-10	8.89E-09	0.00E+00	1.06E-08	3.42E-10	4.13E-07
Tc-101	2.54E-10	3.66E-10	3.59E-09	0.00E+00	6.59E-09	1.87E-10	1.10E-21
Ru-103	1.85E-07	0.00E+00	7.97E-08	0.00E+00	7.06E-07	0.00E+00	2.16E-05
Ru-105	1.54E-08	0.00E+00	6.08E-09	0.00E+00	1.99E-07	0.00E+00	9.42E-06
Ru-106	2.75E-06	0.00E+00	3.48E-07	0.00E+00	5.31E-06	0.00E+00	1.78E-04

Table 6.4
INGESTION DOSE FACTORS
(Page 2 of 8)
(mrem/pCi ingested)

	ADULT						
	bone	liver	t body	thyroid	kidney	lung	gi-III
Ag-110m	1.60E-07	1.48E-07	8.79E-08	0.00E+00	2.91E-07	0.00E+00	6.04E-05
Sb-124	2.80E-06	5.29E-08	1.11E-06	6.79E-09	0.00E-00	2.18E-06	7.95E-05
Sb-125	1.79E-06	2.00E-08	4.26E-07	1.82E-09	0.00E-00	1.38E-06	1.97E-05
Sn-125	8.33E-06	1.68E-07	3.78E-07	1.39E-07	0.00E-00	0.00E-00	1.04E-04
Te-125m	2.68E-06	9.71E-07	3.59E-07	8.06E-07	1.09E-05	0.00E+00	1.07E-05
Te-127m	6.77E-06	2.42E-06	8.25E-07	1.73E-06	2.75E-05	0.00E+00	2.27E-05
Te-127	1.10E-07	3.95E-08	2.38E-08	8.15E-08	4.48E-07	0.00E+00	8.68E-06
Te-129m	1.15E-05	4.29E-06	1.82E-06	3.95E-06	4.80E-05	0.00E+00	5.79E-05
Te-129	3.14E-08	1.10E-08	7.65E-09	2.41E-08	1.32E-07	0.00E+00	2.37E-08
Te-131m	1.73E-06	8.46E-07	7.05E-07	1.34E-06	8.57E-06	0.00E+00	8.40E-05
Te-131	1.97E-08	8.23E-09	6.22E-09	1.62E-08	8.63E-08	0.00E+00	2.79E-09
Te-132	2.52E-06	1.63E-06	1.53E-06	1.80E-06	1.57E-05	0.00E+00	7.71E-05
I-130	7.56E-07	2.23E-06	8.80E-07	1.89E-04	3.48E-06	0.00E+00	1.92E-06
I-131	4.16E-06	5.95E-06	3.41E-06	1.95E-03	1.02E-05	0.00E+00	1.57E-06
I-132	2.03E-07	5.43E-07	1.90E-07	1.90E-05	8.65E-07	0.00E+00	1.02E-07
I-133	1.42E-06	2.47E-06	7.53E-07	3.63E-04	4.31E-06	0.00E+00	2.22E-06
I-134	1.06E-07	2.83E-07	1.03E-07	4.99E-06	4.58E-07	0.00E+00	2.51E-10
I-135	4.43E-07	1.16E-06	4.28E-07	7.65E-05	1.86E-06	0.00E+00	1.31E-06
Cs-134	6.22E-05	1.48E-04	1.21E-04	0.00E+00	4.79E-05	1.59E-05	2.59E-06
Cs-136	6.51E-06	2.57E-05	1.85E-05	0.00E+00	1.43E-05	1.96E-06	2.92E-06
Cs-137	7.97E-05	1.09E-04	7.14E-05	0.00E+00	3.70E-05	1.23E-05	2.11E-06
Cs-138	5.52E-08	1.09E-07	5.40E-08	0.00E+00	8.01E-08	7.91E-09	4.65E-13
Ba-139	9.70E-08	6.91E-11	2.84E-09	0.00E+00	6.46E-11	3.92E-11	1.72E-07
Ba-140	2.03E-05	2.55E-08	1.33E-06	0.00E+00	8.67E-09	1.46E-08	4.18E-05
Ba-141	4.71E-08	3.56E-11	1.59E-09	0.00E+00	3.31E-11	2.02E-11	2.22E-17
Ba-142	2.13E-08	2.19E-11	1.34E-09	0.00E+00	1.85E-11	1.24E-11	3.00E-26
La-140	2.50E-09	1.26E-09	3.33E-10	0.00E+00	0.00E+00	0.00E+00	9.25E-05
La-142	1.28E-10	5.82E-11	1.45E-11	0.00E+00	0.00E+00	0.00E+00	4.25E-07
Ce-141	9.36E-09	6.33E-09	7.18E-10	0.00E+00	2.94E-09	0.00E+00	2.42E-05
Ce-143	1.65E-09	1.22E-06	1.35E-10	0.00E+00	5.37E-10	0.00E+00	4.56E-05
Ce-144	4.88E-07	2.04E-07	2.62E-08	0.00E+00	1.21E-07	0.00E+00	1.65E-04
Pr-143	9.20E-09	3.69E-09	4.56E-10	0.00E+00	2.13E-09	0.00E+00	4.03E-05
Pr-144	3.01E-11	1.25E-11	1.53E-12	0.00E+00	7.05E-12	0.00E+00	4.33E-18
Nd-147	6.29E-09	7.27E-09	4.35E-10	0.00E+00	4.25E-09	0.00E+00	3.49E-05
W-187	1.03E-07	8.61E-08	3.01E-08	0.00E+00	0.00E+00	0.00E+00	2.82E-05
Np-239	1.19E-08	1.17E-10	6.45E-11	0.00E+00	3.65E-10	0.00E+00	2.40E-05

NOTE: The tritium dose factor for bone is assumed to be equal to the total body dose factor.

REFERENCES:

Regulatory Guide 1.109, Table E-11.

Dose Factors for Co-57, Zn-69m, Br-82, Nb-97, Sn-125, Sb-124 and Sb-125 are from NUREG-0172 Age Specific Radiation Dose Commitment Factors for a One Year Chronic Intake, November, 1977, Table 4.

Table 6.4
INGESTION DOSE FACTORS
(Page 3 of 8)
mrem/pCi ingested)

	TEEN						
	bone	liver	t body	thyroid	kidney	lung	gi-III
H-3	1.06E-07	1.06E-07	1.06E-07	1.06E-07	1.06E-07	1.06E-07	1.06E-07
C-14	4.06E-06	8.12E-07	8.12E-07	8.12E-07	8.12E-07	8.12E-07	8.12E-07
Na-24	2.30E-06	2.30E-06	2.30E-06	2.30E-06	2.30E-06	2.30E-06	2.30E-06
P-32	2.76E-04	1.71E-05	1.07E-05	0.00E+00	0.00E+00	0.00E+00	2.32E-05
Cr-51	0.00E+00	0.00E+00	3.60E-09	2.00E-09	7.89E-10	5.14E-09	6.05E-07
Mn-54	0.00E+00	5.90E-06	1.17E-06	0.00E+00	1.76E-06	0.00E+00	1.21E-05
Mn-56	0.00E+00	1.58E-07	2.81E-08	0.00E+00	2.00E-07	0.00E+00	1.04E-05
Fe-55	3.78E-06	2.68E-06	6.25E-07	0.00E+00	0.00E+00	1.70E-06	1.16E-06
Fe-59	5.87E-06	1.37E-05	5.29E-06	0.00E+00	0.00E+00	4.32E-06	3.24E-05
Co-57	0.00E+00	2.38E-07	3.99E-07	0.00E+00	0.00E+00	0.00E+00	4.44E-06
Co-58	0.00E+00	9.72E-07	2.24E-06	0.00E+00	0.00E+00	0.00E+00	1.34E-05
Co-60	0.00E+00	2.81E-06	6.33E-06	0.00E+00	0.00E+00	0.00E+00	3.66E-05
Ni-63	1.77E-04	1.25E-05	6.00E-06	0.00E+00	0.00E+00	0.00E+00	1.99E-06
Ni-65	7.49E-07	9.57E-08	4.36E-08	0.00E+00	0.00E+00	0.00E+00	5.19E-06
Cu-64	0.00E+00	1.15E-07	5.41E-08	0.00E+00	2.91E-07	0.00E+00	8.92E-06
Zn-65	5.76E-06	2.00E-05	9.33E-06	0.00E+00	1.28E-05	0.00E+00	8.47E-06
Zn-69	1.47E-08	2.80E-08	1.96E-09	0.00E+00	1.83E-08	0.00E+00	5.16E-08
Zn-69m	2.40E-07	5.66E-07	5.19E-08	0.00E+00	3.44E-07	0.00E+00	3.11E-05
Br-82	0.00E+00	0.00E+00	3.04E-06	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-83	0.00E+00	0.00E+00	5.74E-08	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-84	0.00E+00	0.00E+00	7.22E-08	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-85	0.00E+00	0.00E+00	3.05E-09	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Rb-86	0.00E+00	2.98E-05	1.40E-05	0.00E+00	0.00E+00	0.00E+00	4.41E-06
Rb-88	0.00E+00	8.52E-08	4.54E-08	0.00E+00	0.00E+00	0.00E+00	7.30E-15
Rb-89	0.00E+00	5.50E-08	3.89E-08	0.00E+00	0.00E+00	0.00E+00	8.43E-17
Sr-89	4.40E-04	0.00E+00	1.26E-05	0.00E+00	0.00E+00	0.00E+00	5.24E-05
Sr-90	8.30E-03	0.00E+00	2.05E-03	0.00E+00	0.00E+00	0.00E+00	2.33E-04
Sr-91	8.07E-06	0.00E+00	3.21E-07	0.00E+00	0.00E+00	0.00E+00	3.66E-05
Sr-92	3.05E-06	0.00E+00	1.30E-07	0.00E+00	0.00E+00	0.00E+00	7.77E-05
Y-90	1.37E-08	0.00E+00	3.69E-10	0.00E+00	0.00E+00	0.00E+00	1.13E-04
Y-91m	1.29E-10	0.00E+00	4.93E-12	0.00E+00	0.00E+00	0.00E+00	6.09E-09
Y-91	2.01E-07	0.00E+00	5.39E-09	0.00E+00	0.00E+00	0.00E+00	8.24E-05
Y-92	1.21E-09	0.00E+00	3.50E-11	0.00E+00	0.00E+00	0.00E+00	3.32E-05
Y-93	3.83E-09	0.00E+00	1.05E-10	0.00E+00	0.00E+00	0.00E+00	1.17E-04
Zr-95	4.12E-08	1.30E-08	8.94E-09	0.00E+00	1.91E-08	0.00E+00	3.00E-05
Zr-97	2.37E-09	4.69E-10	2.16E-10	0.00E+00	7.11E-10	0.00E+00	1.27E-04
Nb-95	8.22E-09	4.56E-09	2.51E-09	0.00E+00	4.42E-09	0.00E+00	1.95E-05
Nb-97	7.37E-11	1.83E-11	6.68E-12	0.00E+00	2.14E-11	0.00E+00	4.37E-07
Mo-99	0.00E+00	6.03E-06	1.15E-06	0.00E+00	1.38E-05	0.00E+00	1.08E-05
Tc-99m	3.32E-10	9.26E-10	1.20E-08	0.00E+00	1.38E-08	5.14E-10	6.08E-07
Tc-101	3.60E-10	5.12E-10	5.03E-09	0.00E+00	9.26E-09	3.12E-10	8.75E-17
Ru-103	2.55E-07	0.00E+00	1.09E-07	0.00E+00	8.99E-07	0.00E+00	2.13E-05
Ru-105	2.18E-08	0.00E+00	8.46E-09	0.00E+00	2.75E-07	0.00E+00	1.76E-05
Ru-106	3.92E-06	0.00E+00	4.94E-07	0.00E+00	7.56E-06	0.00E+00	1.88E-04

Table 6.4 INGESTION DOSE FACTORS
(mrem/pCi ingested)
(Page 4 of 8)

	TEEN						
	bone	liver	t body	thyroid	kidney	lung	gi-ili
Ag-110m	2.05E-07	1.94E-07	1.18E-07	0.00E+00	3.70E-07	0.00E+00	5.45E-05
Sb-124	3.87E-06	7.13E-08	1.51E-06	8.78E-09	0.00E-00	3.38E-06	7.80E-05
Sb-125	2.48E-06	2.71E-08	5.80E-07	2.37E-09	0.00E+00	2.18E-06	1.93E-05
Sn-125	1.19E-05	2.37E-07	5.37E-07	1.86E-07	0.00E+00	0.00E+00	1.12E-04
Te-125m	3.83E-06	1.38E-06	5.12E-07	1.07E-06	0.00E+00	0.00E+00	1.13E-05
Te-127m	9.67E-06	3.43E-06	1.15E-06	2.30E-06	3.92E-05	0.00E+00	2.41E-05
Te-127	1.58E-07	5.60E-08	3.40E-08	1.09E-07	6.40E-07	0.00E+00	1.22E-05
Te-129m	1.63E-05	6.05E-06	2.58E-06	5.26E-06	6.82E-05	0.00E+00	6.12E-05
Te-129	4.48E-08	1.67E-08	1.09E-08	3.20E-08	1.88E-07	0.00E+00	2.45E-07
Te-131m	2.44E-06	1.17E-06	9.76E-07	1.76E-06	1.22E-05	0.00E+00	9.39E-05
Te-131	2.79E-08	1.15E-08	8.72E-09	2.15E-08	1.22E-07	0.00E+00	2.29E-09
Te-132	3.49E-06	2.21E-06	2.08E-06	2.33E-06	2.12E-05	0.00E+00	7.00E-05
I-130	1.03E-06	2.98E-06	1.19E-06	2.43E-04	4.59E-06	0.00E+00	2.29E-06
I-131	5.85E-06	8.19E-06	4.40E-06	2.39E-03	1.41E-05	0.00E+00	1.62E-06
I-132	2.79E-07	7.30E-07	2.62E-07	2.46E-05	1.15E-06	0.00E+00	3.18E-07
I-133	2.01E-06	3.41E-06	1.04E-06	4.76E-04	5.98E-06	0.00E+00	2.58E-06
I-134	1.46E-07	3.87E-07	1.39E-07	6.45E-06	6.10E-07	0.00E+00	5.10E-09
I-135	6.10E-07	1.57E-06	5.82E-07	1.01E-04	2.48E-06	0.00E+00	1.74E-06
Cs-134	8.37E-05	1.97E-04	9.14E-05	0.00E+00	6.26E-05	2.39E-05	2.45E-06
Cs-136	8.59E-06	3.38E-05	2.27E-05	0.00E+00	1.84E-05	2.90E-06	2.72E-06
Cs-137	1.12E-04	1.49E-04	5.19E-05	0.00E+00	5.07E-05	1.97E-05	2.12E-06
Cs-138	7.76E-08	1.49E-07	7.45E-08	0.00E+00	1.10E-07	1.28E-08	6.76E-11
Ba-139	1.39E-07	9.78E-11	4.05E-09	0.00E+00	9.22E-11	6.74E-11	1.24E-06
Ba-140	2.84E-05	3.48E-08	1.83E-06	0.00E+00	1.18E-08	2.34E-08	4.38E-05
Ba-141	6.71E-08	5.01E-11	2.24E-09	0.00E+00	4.65E-11	3.43E-11	1.43E-13
Ba-142	2.99E-08	2.99E-11	1.84E-09	0.00E+00	2.53E-11	1.99E-11	9.18E-20
La-140	3.48E-09	1.71E-09	4.55E-10	0.00E+00	0.00E+00	0.00E+00	9.82E-05
La-142	1.79E-10	7.95E-11	1.98E-11	0.00E+00	0.00E+00	0.00E+00	2.42E-06
Ce-141	1.33E-08	8.88E-09	1.02E-09	0.00E+00	4.18E-09	0.00E+00	2.54E-05
Ce-143	2.35E-09	1.71E-06	1.91E-10	0.00E+00	7.67E-10	0.00E+00	5.14E-05
Ce-144	6.96E-07	2.88E-07	3.74E-08	0.00E+00	1.72E-07	0.00E+00	1.75E-04
Pr-143	1.31E-08	5.23E-09	6.52E-10	0.00E+00	3.04E-09	0.00E+00	4.31E-05
Pr-144	4.30E-11	1.76E-11	2.18E-12	0.00E+00	1.01E-11	0.00E+00	4.74E-14
Nd-147	9.38E-09	1.02E-08	6.11E-10	0.00E+00	5.99E-09	0.00E+00	3.68E-05
W-187	1.46E-07	1.19E-07	4.17E-08	0.00E+00	0.00E+00	0.00E+00	3.22E-05
Np-239	1.76E-09	1.66E-10	9.22E-11	0.00E+00	5.21E-10	0.00E+00	2.67E-05

NOTE: The tritium dose factor for bone is assumed to be equal to the total body dose factor.

REFERENCES:

Regulatory Guide 1.109, Table E-12.
Dose Factors for Co-57, Zn-69m, Br-82, Nb-97, Sn-125, Sb-124 and Sb-125 are from NUREG-0172 Age Specific Radiation Dose Commitment Factors for a One Year Chronic Intake, November, 1977, Table 4.

Table 6.4 INGESTION DOSE FACTORS
(mrem/pCi ingested)
(Page 5 of 8)

	CHILD						
	bone	liver	t body	thyroid	kidney	lung	gi-ili
H-3	2.03E-07	2.03E-07	2.03E-07	2.03E-07	2.03E-07	2.03E-07	2.03E-07
C-14	1.21E-05	2.42E-06	2.42E-06	2.42E-06	2.42E-06	2.42E-06	2.42E-06
Na-24	5.80E-06	5.80E-06	5.80E-06	5.80E-06	5.80E-06	5.80E-06	5.80E-06
P-32	8.25E-04	3.86E-05	3.18E-05	0.00E+00	0.00E+00	0.00E+00	2.28E-05
Cr-51	0.00E+00	0.00E+00	8.90E-09	4.94E-09	1.35E-09	9.02E-09	4.72E-07
Mn-54	0.00E+00	1.07E-05	2.85E-06	0.00E+00	3.00E-06	0.00E+00	8.98E-06
Mn-56	0.00E+00	3.34E-07	7.54E-08	0.00E+00	4.04E-07	0.00E+00	4.84E-05
Fe-55	1.15E-05	6.10E-06	1.89E-06	0.00E+00	0.00E+00	3.45E-06	1.13E-06
Fe-59	1.65E-05	2.67E-05	1.33E-05	0.00E+00	0.00E+00	7.74E-06	2.78E-05
Co-57	0.00E+00	4.93E-07	9.98E-07	0.00E+00	0.00E+00	0.00E+00	4.04E-06
Co-58	0.00E+00	1.80E-06	5.51E-06	0.00E+00	0.00E+00	0.00E+00	1.05E-05
Co-60	0.00E+00	5.29E-06	1.56E-05	0.00E+00	0.00E+00	0.00E+00	2.93E-05
Ni-63	5.38E-04	2.88E-05	1.83E-05	0.00E+00	0.00E+00	0.00E+00	1.94E-06
Ni-65	2.22E-06	2.09E-07	1.22E-07	0.00E+00	0.00E+00	0.00E+00	2.56E-05
Cu-64	0.00E+00	2.45E-07	1.48E-07	0.00E+00	5.92E-07	0.00E+00	1.15E-05
Zn-65	1.37E-05	3.65E-05	2.27E-05	0.00E+00	2.30E-05	0.00E+00	6.41E-06
Zn-69	4.38E-08	6.33E-08	5.85E-09	0.00E+00	3.84E-08	0.00E+00	3.99E-06
Zn-69m	7.10E-07	1.21E-06	1.43E-07	0.00E+00	7.03E-07	0.00E+00	3.94E-05
Br-82	0.00E+00	0.00E+00	7.55E-06	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-83	0.00E+00	0.00E+00	1.71E-07	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-84	0.00E+00	0.00E+00	1.98E-07	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-85	0.00E+00	0.00E+00	9.12E-09	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Rb-86	0.00E+00	6.70E-05	4.12E-05	0.00E+00	0.00E+00	0.00E+00	4.31E-06
Rb-88	0.00E+00	1.90E-07	1.32E-07	0.00E+00	0.00E+00	0.00E+00	9.32E-09
Rb-89	0.00E+00	1.17E-07	1.04E-07	0.00E+00	0.00E+00	0.00E+00	1.02E-09
Sr-89	1.32E-03	0.00E+00	3.77E-05	0.00E+00	0.00E+00	0.00E+00	5.11E-05
Sr-90	1.70E-02	0.00E+00	4.31E-03	0.00E+00	0.00E+00	0.00E+00	2.29E-04
Sr-91	2.40E-05	0.00E+00	9.06E-07	0.00E+00	0.00E+00	0.00E+00	5.30E-05
Sr-92	9.03E-06	0.00E+00	3.62E-07	0.00E+00	0.00E+00	0.00E+00	1.71E-04
Y-90	4.11E-08	0.00E+00	1.10E-09	0.00E+00	0.00E+00	0.00E+00	1.17E-04
Y-91m	3.82E-10	0.00E+00	1.39E-11	0.00E+00	0.00E+00	0.00E+00	7.48E-07
Y-91	6.02E-07	0.00E+00	1.61E-08	0.00E+00	0.00E+00	0.00E+00	8.02E-05
Y-92	3.60E-09	0.00E+00	1.03E-10	0.00E+00	0.00E+00	0.00E+00	1.04E-04
Y-93	1.14E-08	0.00E+00	3.13E-10	0.00E+00	0.00E+00	0.00E+00	1.70E-04
Zr-95	1.16E-07	2.55E-08	2.27E-08	0.00E+00	3.65E-08	0.00E+00	2.66E-05
Zr-97	6.99E-09	1.01E-09	5.96E-10	0.00E+00	1.45E-09	0.00E+00	1.53E-04
Nb-95	2.25E-08	8.76E-09	6.26E-09	0.00E+00	8.23E-09	0.00E+00	1.62E-05
Nb-97	2.17E-10	3.92E-11	1.83E-11	0.00E+00	4.35E-11	0.00E+00	1.21E-05
Mo-99	0.00E+00	1.33E-05	3.29E-06	0.00E+00	2.84E-05	0.00E+00	1.10E-05
Tc-99m	9.23E-10	1.81E-09	3.00E-08	0.00E+00	2.63E-08	9.19E-10	1.03E-06
Tc-101	1.07E-09	1.12E-09	1.42E-08	0.00E+00	1.91E-08	5.92E-10	3.56E-09
Ru-103	7.31E-07	0.00E+00	2.81E-07	0.00E+00	1.84E-06	0.00E+00	1.89E-05
Ru-105	6.45E-08	0.00E+00	2.34E-08	0.00E+00	5.67E-07	0.00E+00	4.21E-05
Ru-106	1.17E-05	0.00E+00	1.46E-06	0.00E+00	1.58E-05	0.00E+00	1.82E-04

Table 6.4 INGESTION DOSE FACTORS
(mrem/pCi ingested)
(Page 6 of 8)

	CHILD						
	bone	liver	t body	thyroid	kidney	lung	gi-ili
Ag-110m	5.39E-07	3.64E-07	2.91E-07	0.00E+00	6.78E-07	0.00E+00	4.33E-05
Sb-124	1.11E-05	1.44E-07	3.89E-06	2.45E-08	0.00E+00	6.16E-06	6.94E-05
Sb-125	7.16E-06	5.52E-08	1.50E-06	6.63E-09	0.00E+00	3.99E-06	1.71E-05
Sn-125	3.55E-05	5.35E-07	1.59E-06	5.55E-07	0.00E+00	0.00E+00	1.10E-05
Te-125m	1.14E-05	3.09E-06	1.52E-06	3.20E-06	0.00E+00	0.00E+00	1.10E-05
Te-127m	2.89E-05	7.78E-06	3.43E-06	6.91E-06	8.24E-05	0.00E+00	2.34E-05
Te-127	4.71E-07	1.27E-07	1.01E-07	3.26E-07	1.34E-06	0.00E+00	1.84E-05
Te-129m	4.87E-05	1.36E-05	7.56E-06	1.57E-05	1.43E-04	0.00E+00	5.94E-05
Te-129	1.34E-07	3.74E-08	3.18E-08	9.56E-08	3.92E-07	0.00E+00	8.34E-06
Te-131m	7.20E-06	2.49E-06	2.65E-06	5.12E-06	2.41E-05	0.00E+00	1.01E-04
Te-131	8.30E-08	2.53E-08	2.47E-08	6.35E-08	2.51E-07	0.00E+00	4.36E-07
Te-132	1.01E-05	4.47E-06	5.40E-06	6.51E-06	4.15E-05	0.00E+00	4.50E-05
I-130	2.92E-06	5.90E-06	3.04E-06	6.50E-04	8.82E-06	0.00E+00	2.76E-06
I-131	1.72E-05	1.73E-05	9.83E-06	5.72E-03	2.84E-05	0.00E+00	1.54E-06
I-132	8.00E-07	1.47E-06	6.76E-07	6.82E-05	2.25E-06	0.00E+00	1.73E-06
I-133	5.92E-06	7.32E-06	2.77E-06	1.36E-03	1.22E-05	0.00E+00	2.95E-06
I-134	4.19E-07	7.78E-07	3.58E-07	1.79E-05	1.19E-06	0.00E+00	5.16E-07
I-135	1.75E-06	3.15E-06	1.49E-06	2.79E-04	4.83E-06	0.00E+00	2.40E-06
Cs-134	2.34E-04	3.84E-04	8.10E-05	0.00E+00	1.19E-04	4.27E-05	2.07E-06
Cs-136	2.35E-05	6.46E-05	4.18E-05	0.00E+00	3.44E-05	5.13E-06	2.27E-06
Cs-137	3.27E-04	3.13E-04	4.62E-05	0.00E+00	1.02E-04	3.67E-05	1.96E-06
Cs-138	2.28E-07	3.17E-07	2.01E-07	0.00E+00	2.23E-07	2.40E-08	1.46E-07
Ba-139	4.14E-07	2.21E-10	1.20E-08	0.00E+00	1.93E-10	1.30E-10	2.39E-05
Ba-140	8.31E-05	7.28E-08	4.85E-06	0.00E+00	2.37E-08	4.34E-08	4.21E-05
Ba-141	2.00E-07	1.12E-10	6.51E-09	0.00E+00	9.69E-11	6.58E-10	1.14E-07
Ba-142	8.74E-08	6.29E-11	4.88E-09	0.00E+00	5.09E-11	3.70E-11	1.14E-09
La-140	1.01E-08	3.53E-09	1.19E-09	0.00E+00	0.00E+00	0.00E+00	9.84E-05
La-142	5.24E-10	1.67E-10	5.23E-11	0.00E+00	0.00E+00	0.00E+00	3.31E-05
Ce-141	3.97E-08	1.98E-08	2.94E-09	0.00E+00	8.68E-09	0.00E+00	2.47E-05
Ce-143	6.99E-09	3.79E-06	5.49E-10	0.00E+00	1.59E-09	0.00E+00	5.55E-05
Ce-144	2.08E-06	6.52E-07	1.11E-07	0.00E+00	3.61E-07	0.00E+00	1.70E-04
Pr-143	3.93E-08	1.18E-08	1.95E-09	0.00E+00	6.39E-09	0.00E+00	4.24E-05
Pr-144	1.29E-10	3.99E-11	6.49E-12	0.00E+00	2.11E-11	0.00E+00	8.59E-08
Nd-147	2.79E-08	2.26E-08	1.75E-09	0.00E+00	1.24E-08	0.00E+00	3.58E-05
W-187	4.29E-07	2.54E-07	1.14E-07	0.00E+00	0.00E+00	0.00E+00	3.57E-05
Np-239	5.25E-09	3.77E-10	2.65E-10	0.00E+00	1.09E-09	0.00E+00	2.79E-05

NOTE: The tritium dose factor for bone is assumed to be equal to the total body dose factor.

REFERENCES:

Regulatory Guide 1.109, Table E-13.

Dose Factors for Co-57, Zn-69m, Br-82, Nb-97, Sn-125, Sb-124 and Sb-125 are from NUREG-0172 Age Specific Radiation Dose Commitment Factors for a One Year Chronic Intake, November, 1977, Table 4.

Table 6.4
INGESTION DOSE FACTORS
(mrem/pCi ingested)
(Page 7 of 8)
INFANT

	bone	liver	t body	thyroid	kidney	lung	gi-III
H-3	3.08E-07	3.08E-07	3.08E-07	3.08E-07	3.08E-07	3.08E-07	3.08E-07
C-14	2.37E-05	5.06E-06	5.06E-06	5.06E-06	5.06E-06	5.06E-06	5.06E-06
Na-24	1.01E-05	1.01E-05	1.01E-05	1.01E-05	1.01E-05	1.01E-05	1.01E-05
P-32	1.70E-03	1.00E-04	6.59E-05	0.00E+00	0.00E+00	0.00E+00	2.30E-05
Cr-51	0.00E+00	0.00E+00	1.41E-08	9.20E-09	2.01E-09	1.79E-08	4.11E-07
Mn-54	0.00E+00	1.99E-05	4.51E-06	0.00E+00	4.41E-06	0.00E+00	7.31E-06
Mn-56	0.00E+00	8.18E-07	1.41E-07	0.00E+00	7.03E-07	0.00E+00	7.43E-05
Fe-55	1.39E-05	8.98E-06	2.40E-06	0.00E+00	0.00E+00	4.39E-06	1.14E-06
Fe-59	3.08E-05	5.38E-05	2.12E-05	0.00E+00	0.00E+00	1.59E-05	2.57E-05
Co-57	0.00E+00	1.15E-06	1.87E-06	0.00E+00	0.00E+00	0.00E+00	3.92E-06
Co-58	0.00E+00	3.60E-06	8.98E-06	0.00E+00	0.00E+00	0.00E+00	8.97E-06
Co-60	0.00E+00	1.08E-05	2.55E-05	0.00E+00	0.00E+00	0.00E+00	2.57E-05
Ni-63	6.34E-04	3.92E-05	2.20E-05	0.00E+00	0.00E+00	0.00E+00	1.95E-06
Ni-65	4.70E-06	5.32E-07	2.42E-07	0.00E+00	0.00E+00	0.00E+00	4.05E-05
Cu-64	0.00E+00	6.09E-07	2.82E-07	0.00E+00	1.03E-06	0.00E+00	1.25E-05
Zn-65	1.84E-05	6.31E-05	2.91E-05	0.00E+00	3.06E-05	0.00E+00	5.33E-05
Zn-69	9.33E-08	1.68E-07	1.25E-08	0.00E+00	6.98E-08	0.00E+00	1.37E-05
Zn-69m	1.50E-06	3.06E-06	2.79E-07	0.00E+00	1.24E-06	0.00E+00	4.24E-05
Br-82	0.00E+00	0.00E+00	1.27E-05	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-83	0.00E+00	0.00E+00	3.63E-07	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-84	0.00E+00	0.00E+00	3.82E-07	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-85	0.00E+00	0.00E+00	1.94E-08	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Rb-86	0.00E+00	1.70E-04	8.40E-05	0.00E+00	0.00E+00	0.00E+00	4.35E-06
Rb-88	0.00E+00	4.98E-07	2.73E-07	0.00E+00	0.00E+00	0.00E+00	4.85E-07
Rb-89	0.00E+00	2.86E-07	1.97E-07	0.00E+00	0.00E+00	0.00E+00	9.74E-08
Sr-89	2.51E-03	0.00E+00	7.20E-05	0.00E+00	0.00E+00	0.00E+00	5.16E-05
Sr-90	1.85E-02	0.00E+00	4.71E-03	0.00E+00	0.00E+00	0.00E+00	2.31E-04
Sr-91	5.00E-05	0.00E+00	1.81E-06	0.00E+00	0.00E+00	0.00E+00	5.92E-05
Sr-92	1.92E-05	0.00E+00	7.13E-07	0.00E+00	0.00E+00	0.00E+00	2.07E-04
Y-90	8.69E-08	0.00E+00	2.33E-09	0.00E+00	0.00E+00	0.00E+00	1.20E-04
Y-91m	8.10E-10	0.00E+00	2.76E-11	0.00E+00	0.00E+00	0.00E+00	2.70E-06
Y-91	1.13E-06	0.00E+00	3.01E-08	0.00E+00	0.00E+00	0.00E+00	8.10E-05
Y-92	7.65E-09	0.00E+00	2.15E-10	0.00E+00	0.00E+00	0.00E+00	1.46E-04
Y-93	2.43E-08	0.00E+00	6.62E-10	0.00E+00	0.00E+00	0.00E+00	1.92E-04
Zr-95	2.06E-07	5.02E-08	3.56E-08	0.00E+00	5.41E-08	0.00E+00	2.50E-05
Zr-97	1.48E-08	2.54E-09	1.16E-09	0.00E+00	2.56E-09	0.00E+00	1.62E-04
Nb-95	4.20E-08	1.73E-08	1.00E-08	0.00E+00	1.24E-08	0.00E+00	1.46E-05
Nb-97	4.59E-10	9.79E-11	3.53E-11	0.00E+00	7.65E-11	0.00E+00	3.09E-05
Mo-99	0.00E+00	3.40E-05	6.63E-06	0.00E+00	5.08E-05	0.00E+00	1.12E-05
Tc-99m	1.92E-09	3.96E-09	5.10E-08	0.00E+00	4.26E-08	2.07E-09	1.15E-06
Tc-101	2.27E-09	2.86E-09	2.83E-08	0.00E+00	3.40E-08	1.56E-09	4.86E-07
Ru-103	1.48E-06	0.00E+00	4.95E-07	0.00E+00	3.08E-06	0.00E+00	1.80E-05
Ru-105	1.36E-07	0.00E+00	4.58E-08	0.00E+00	1.00E-06	0.00E+00	5.41E-05
Ru-106	2.41E-05	0.00E+00	3.01E-06	0.00E+00	2.85E-05	0.00E+00	1.83E-04

Table 6.4 INGESTION DOSE FACTORS
(mrem/pCi ingested)
(Page 8 of 8)

	INFANT						
	bone	liver	t body	thyroid	kidney	lung	gi-ili
Ag-110m	9.96E-07	7.27E-07	4.81E-07	0.00E+00	1.04E-06	0.00E+00	3.77E-05
Sb-124	2.14E-05	3.15E-07	6.63E-06	5.68E-08	0.00E+00	1.34E-05	6.60E-05
Sb-125	1.23E-05	1.19E-07	2.53E-06	1.54E-08	0.00E+00	7.72E-06	1.64E-05
Sn-125	7.41E-05	1.38E-06	3.29E-06	1.36E-06	0.00E+00	0.00E+00	1.11E-04
Te-125m	2.33E-05	7.79E-06	3.15E-06	7.84E-06	0.00E+00	0.00E+00	1.11E-05
Te-127m	5.85E-05	1.94E-05	7.08E-06	1.69E-05	1.44E-04	0.00E+00	2.36E-05
Te-127	1.00E-06	3.35E-07	2.15E-07	8.14E-07	2.44E-06	0.00E+00	2.10E-05
Te-129m	1.00E-04	3.43E-05	1.54E-05	3.84E-05	2.50E-04	0.00E+00	5.97E-05
Te-129	2.84E-07	9.79E-08	6.63E-08	2.38E-07	7.07E-07	0.00E+00	2.27E-05
Te-131m	1.52E-05	6.12E-06	5.05E-06	1.24E-05	4.21E-05	0.00E+00	1.03E-04
Te-131	1.76E-07	6.50E-08	4.94E-08	1.57E-07	4.50E-07	0.00E+00	7.11E-06
Te-132	2.08E-05	1.03E-05	9.61E-06	1.52E-05	6.44E-05	0.00E+00	3.81E-05
I-130	6.00E-06	1.32E-05	5.30E-06	1.48E-03	1.45E-05	0.00E+00	2.83E-06
I-131	3.59E-05	4.23E-05	1.86E-05	1.39E-02	4.94E-05	0.00E+00	1.51E-06
I-132	1.66E-06	3.37E-06	1.20E-06	1.58E-04	3.76E-06	0.00E+00	2.73E-06
I-133	1.25E-05	1.82E-05	5.33E-06	3.31E-03	2.14E-05	0.00E+00	3.08E-06
I-134	8.69E-07	1.78E-06	6.33E-07	4.15E-05	1.99E-06	0.00E+00	1.84E-06
I-135	3.64E-06	7.24E-06	2.64E-06	6.49E-04	8.07E-06	0.00E+00	2.62E-06
Cs-134	3.77E-04	7.03E-04	7.10E-05	0.00E+00	1.81E-04	7.42E-05	1.91E-06
Cs-136	4.59E-05	1.35E-04	5.04E-05	0.00E+00	5.38E-05	1.10E-05	2.05E-06
Cs-137	5.22E-04	6.11E-04	4.33E-05	0.00E+00	1.64E-04	6.64E-05	1.91E-06
Cs-138	4.81E-07	7.82E-07	3.79E-07	0.00E+00	3.90E-07	6.09E-08	1.25E-06
Ba-139	8.81E-07	5.84E-10	2.55E-08	0.00E+00	3.51E-10	3.54E-10	5.58E-05
Ba-140	1.71E-04	1.71E-07	8.81E-06	0.00E+00	4.06E-08	1.05E-07	4.20E-05
Ba-141	4.25E-07	2.91E-10	1.34E-08	0.00E+00	1.75E-10	1.77E-10	5.19E-06
Ba-142	1.84E-07	1.53E-10	9.06E-09	0.00E+00	8.81E-11	9.26E-11	7.59E-07
La-140	2.11E-08	8.32E-09	2.14E-09	0.00E+00	0.00E+00	0.00E+00	9.77E-05
La-142	1.10E-09	4.04E-10	9.67E-11	0.00E+00	0.00E+00	0.00E+00	6.86E-05
Ce-141	7.87E-08	4.80E-08	5.65E-09	0.00E+00	1.48E-08	0.00E+00	2.48E-05
Ce-143	1.48E-08	9.82E-06	1.12E-09	0.00E+00	2.86E-09	0.00E+00	5.73E-05
Ce-144	2.98E-06	1.22E-06	1.67E-07	0.00E+00	4.93E-07	0.00E+00	1.71E-04
Pr-143	8.13E-08	3.04E-08	4.03E-09	0.00E+00	1.13E-08	0.00E+00	4.29E-05
Pr-144	2.74E-10	1.06E-10	1.38E-11	0.00E+00	3.84E-11	0.00E+00	4.93E-06
Nd-147	5.53E-08	5.68E-08	3.48E-09	0.00E+00	2.19E-08	0.00E+00	3.60E-05
W-187	9.03E-07	6.28E-07	2.17E-07	0.00E+00	0.00E+00	0.00E+00	3.69E-05
Np-239	1.11E-08	9.93E-10	5.61E-10	0.00E+00	1.98E-09	0.00E+00	2.87E-05

NOTE: The tritium dose factor for bone is assumed to be equal to the total body dose factor.

REFERENCES:

Regulatory Guide 1.109, Table E-14.

Dose Factors for Co-57, Zn-69m, Br-82, Nb-97, Sn-125, Sb-124 and Sb-125 are from NUREG-0172 Age Specific Radiation Dose Commitment Factors for a One Year Chronic Intake, November, 1977, Table 4.

Table 6.5 BIOACCUMULATION FACTORS FOR FRESHWATER FISH
($\mu\text{Ci/kg}$ per $\mu\text{Ci/ml}$)

H-3	9.0E-01	Y-91m	2.5E+01	I-134	4.0E+01
C-14	4.6E+03	Y-91	2.5E+01	I-135	4.0E+01
Na-24	1.0E+02	Y-92	2.5E+01	Cs-134	1.9E+03
P-32	1.0E+05	Y-93	2.5E+01	Cs-136	1.9E+03
Cr-51	2.0E+02	Zr-95	3.3E+00	Cs-137	1.9E+03
Mn-54	4.0E+02	Zr-97	3.3E+00	Cs-138	1.9E+03
Mn-56	4.0E+02	Nb-95	3.0E+04	Ba-139	4.0E+00
Fe-55	1.0E+02	Nb-97	3.0E+04	Ba-140	4.0E+00
Fe-59	1.0E+02	Mo-99	1.0E+01	Ba-141	4.0E+00
Co-57	5.0E+01	Tc-99m	1.5E+01	Ba-142	4.0E+00
Co-58	5.0E+01	Tc-101	1.5E+01	La-140	2.5E+01
Co-60	5.0E+01	Ru-103	1.0E+01	La-144	2.5E+01
Ni-63	1.0E+02	Ru-105	1.0E+01	Ce-141	1.0E+00
Ni-65	1.0E+02	Ru-106	1.0E+01	Ce-143	1.0E+00
Cu-64	5.0E+01	Ag-110m	2.31E+00	Ce-144	1.0E+00
Zn-65	2.0E+03	Sb-124	1.0E+00	Pr-144	2.5E+01
Zn-69	2.0E+03	Sb-125	1.0E+00	Pr-143	2.5E+01
Zn-69m	2.0E+03	Sn-125	3.0E+03	Nd-147	2.5E+01
Br-82	4.2E+02	Te-125m	4.0E+02	W-187	1.2E+03
Br-83	4.2E+02	Te-127m	4.0E+02	Np-239	1.0E+01
Br-84	4.2E+02	Te-127	4.0E+02		
Br-85	4.2E+02	Te-129m	4.0E+02		
Rb-86	2.0E+03	Te-129	4.0E+02		
Rb-88	2.0E+03	Te-131m	4.0E+02		
Rb-89	2.0E+03	Te-131	4.0E+02		
Sr-89	5.6E+01	Te-132	4.0E+02		
Sr-90	5.6E+01	I-130	4.0E+01		
Sr-91	5.6E+01	I-131	4.0E+01		
Sr-92	5.6E+01	I-132	4.0E+01		
Y-90	2.5E+01	I-133	4.0E+01		

REFERENCES:

Bioaccumulation factors for Ag-110m, Sb-124, Sb-125 and Sn-125 are from ORNL-4992, "A Methodology for Calculating Radiation Doses from Radioactivity Released to the Environment," March 1976, Table 4.12A.

Bioaccumulation factors for Iodine, Cesium, and Strontium nuclides are from NUREG/CR-1004, Table 3.2.4.

All other nuclides' bioaccumulation factors are from Regulatory Guide 1.109, Table A-1.

Table 6.6 EXTERNAL DOSE FACTORS FOR STANDING ON CONTAMINATED GROUND
(mrem/h per pCi/m²)
(Page 1 of 2)

<u>Nuclide</u>	<u>Total Body</u>	<u>Skin</u>
H-3	0.0	0.0
C-14	0.0	0.0
Na-24	2.50E-08	2.90E-08
P-32	0.0	0.0
Cr-51	2.20E-10	2.60E-10
Mn-54	5.80E-09	6.80E-09
Mn-56	1.10E-08	1.30E-08
Fe-55	0.0	0.0
Fe-59	8.00E-09	9.40E-09
Co-57	1.77E-09	2.21E-09
Co-58	7.00E-09	8.20E-09
Co-60	1.70E-08	2.00E-08
Ni-63	0.0	0.0
Ni-65	3.70E-09	4.30E-09
Cu-64	1.50E-09	1.70E-09
Zn-65	4.00E-09	4.60E-09
Zn-69	0.0	0.0
Zn-69m	5.50E-09	6.59E-09
Br-82	3.18E-08	3.90E-08
Br-83	6.40E-11	9.30E-11
Br-84	1.20E-08	1.40E-08
Br-85	0.0	0.0
Rb-86	6.30E-10	7.20E-10
Rb-88	3.50E-09	4.00E-09
Rb-89	1.50E-08	1.80E-08
Sr-89	5.60E-13	6.50E-13
Sr-91	7.10E-09	8.30E-09
Sr-92	9.00E-09	1.00E-08
Y-90	2.20E-12	2.60E-12
Y-91m	3.80E-09	4.40E-09
Y-91	2.40E-11	2.70E-11
Y-92	1.60E-09	1.90E-09
Y-93	5.70E-10	7.80E-10
Zr-95	5.00E-09	5.80E-09
Zr-97	5.50E-09	6.40E-09
Nb-95	5.10E-09	6.00E-09
Nb-97	8.11E-09	1.00E-08
Mo-99	1.90E-09	2.20E-09
Tc-99m	9.60E-10	1.10E-09
Tc-101	2.70E-09	3.00E-09
Ru-103	3.60E-09	4.20E-09
Ru-105	4.50E-09	5.10E-09
Ru-106	1.50E-09	1.80E-09

Table 6.6 EXTERNAL DOSE FACTORS FOR STANDING ON CONTAMINATED GROUND
(mrem/h per pCi/m²)
(Page 2 of 2)

Nuclide	Total Body	Skin
Ag-110m	1.80E-08	2.10E-08
Sb-124	2.17E-08	2.57E-08
Sb-125	5.48E-09	6.80E-09
Sn-125	3.58E-09	4.51E-09
Te-125m	3.50E-11	4.80E-11
Te-127m	1.10E-12	1.30E-12
Te-127	1.00E-11	1.10E-11
Te-129m	7.70E-10	9.00E-10
Te-129	7.10E-10	8.40E-10
Te-131m	8.40E-09	9.90E-09
Te-131	2.20E-09	2.60E-06
Te-132	1.70E-09	2.00E-09
I-130	1.40E-08	1.70E-08
I-131	2.80E-09	3.40E-09
I-132	1.70E-08	2.00E-08
I-133	3.70E-09	4.50E-09
I-134	1.60E-08	1.90E-08
I-135	1.20E-08	1.40E-08
Cs-134	1.20E-08	1.40E-08
Cs-136	1.50E-08	1.70E-08
Cs-137	4.20E-09	4.90E-09
Cs-138	2.10E-08	2.40E-08
Ba-139	2.40E-09	2.70E-09
Ba-140	2.10E-09	2.40E-09
Ba-141	4.30E-09	4.90E-09
Ba-142	7.90E-09	9.00E-09
La-140	1.50E-08	1.70E-08
La-142	1.50E-08	1.80E-08
Ce-141	5.50E-10	6.20E-10
Ce-143	2.20E-09	2.50E-09
Ce-144	3.20E-10	3.70E-10
Pr-143	0.0	0.0
Pr-144	2.00E-10	2.30E-10
Nd-147	1.00E-09	1.20E-09
W-187	3.10E-09	3.60E-09
Np-239	9.50E-10	1.10E-09

REFERENCES:

Regulatory Guide 1.109, Table E-6.

Dose Factors for Co-57, Zn-69m, Br-82, Nb-97, Sn-125, Sb-124 and Sb-125 are from Dose-Rate Conversion Factors for External Exposure to Photon and Electron Radiation from Radionuclides Occurring in Routine Releases from Nuclear Fuel Cycle Facilities, D. C. Kocher, Health Physics Volume 38, April 1980.

Figure 6.1 LIQUID EFFLUENT RELEASE POINTS


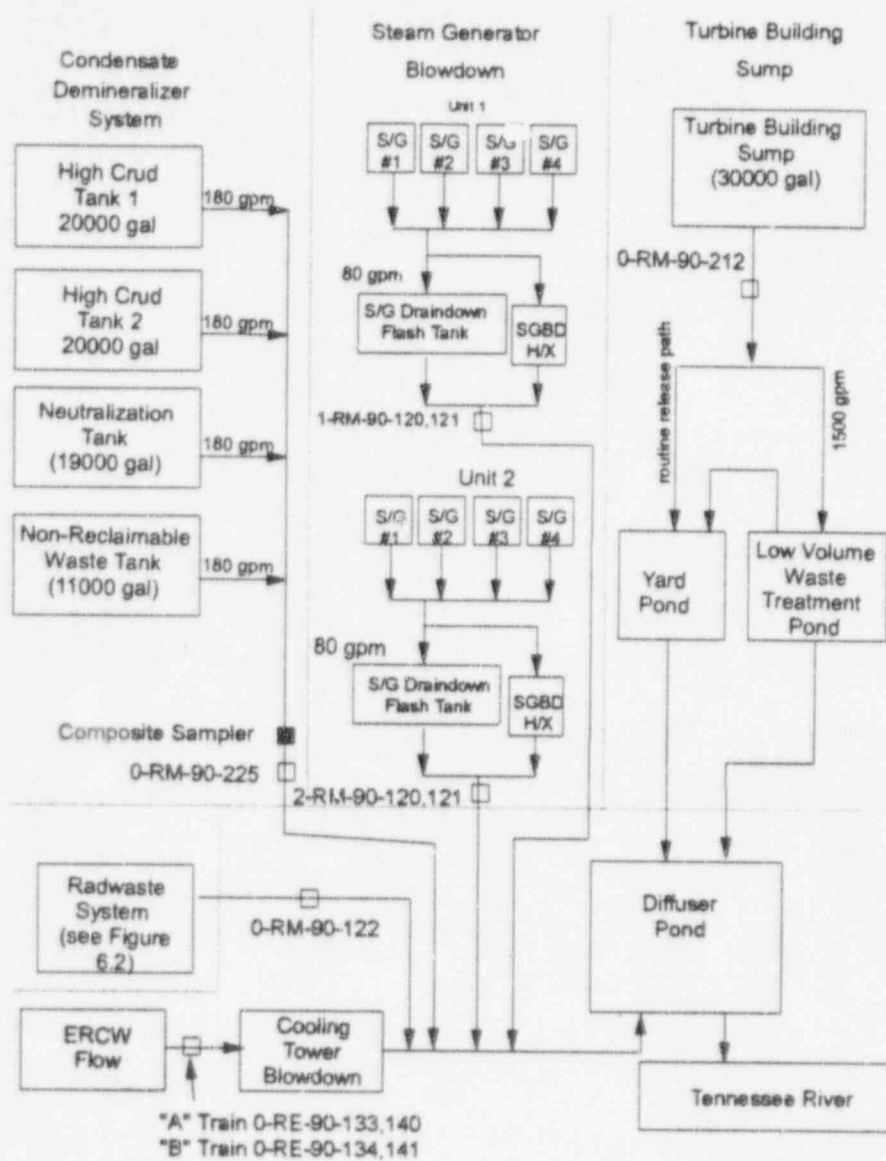


Figure 6.2 LIQUID RADWASTE SYSTEM

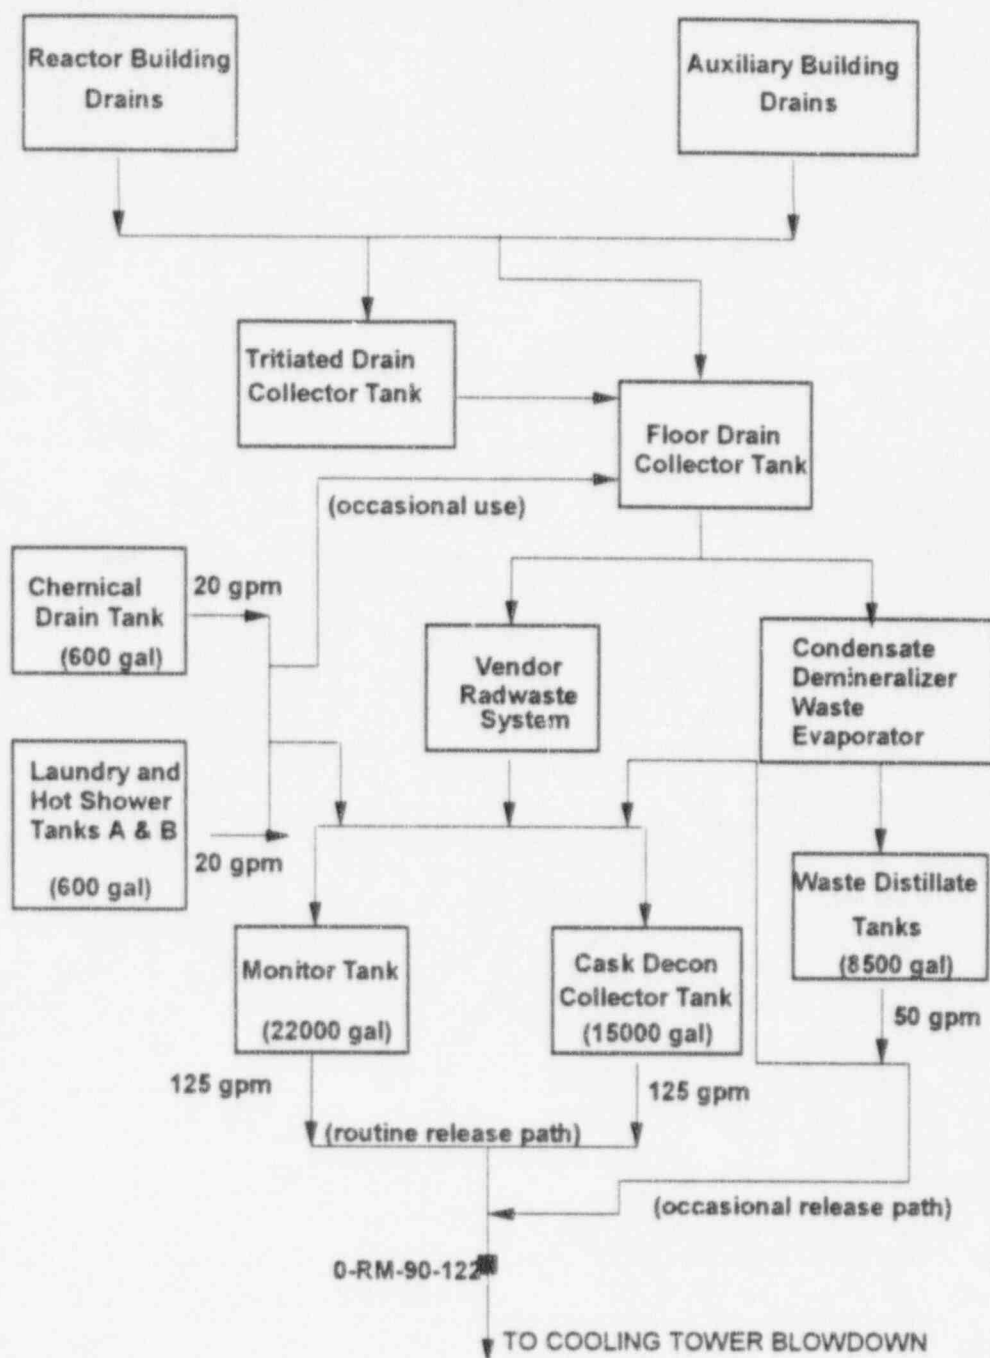

SECTION 7.0
GASEOUS EFFLUENTS

SECTION 7.0 GASEOUS EFFLUENTS

RELEASE POINTS DESCRIPTION

There are six major exhaust pathways at Sequoyah Nuclear Plant that are monitored for airborne effluents. These are: a Condenser Vacuum Exhaust for each unit, a Service Building Exhaust, an Auxiliary Building Exhaust and a Shield Building Exhaust for each unit. Figure 7.1 provides an outline of the airborne effluent release and discharge points with associated radiation monitor identifications.

33

Condenser Vacuum Exhaust

The Condenser Vacuum Exhausts (CVEs) are located in the turbine building. They exhaust at a maximum design flow rate of 45 cubic feet per minute. They are monitored for routine releases by radiation monitors 1,2-RM-90-119.

33

Service Building Vent

Various low-level sources exhaust to the Service Building Vent. This exhausts at a total design flow of approximately 14,950 cfm. The portion of this total flow originating from the Titration Room, the Waste Baler Room, and the Chemistry Lab is monitored by radiation monitor 0-RM-90-132.

Auxiliary Building Exhaust (see Figure 7.2 for detail)

The annulus vacuum priming system exhausts through the containment vent to the Auxiliary Building. The Auxiliary Building Exhaust consists of the Auxiliary Building General Exhaust System and the Fuel Handling Exhaust and they cumulatively exhaust at a maximum design flow of 228,000 cfm. The exhaust is monitored by radiation monitor 0-RM-90-101.

Shield Building Vent (see Figure 7.2 for detail)

The Auxiliary Building Gas Treatment System (ABGTS) draws from the Auxiliary Building and exhausts to the waste gas header. There are nine Waste Gas Decay Tanks (WGDTs) that also empty into this header. Either ABGTS or the Emergency Gas Treatment System (EGTS) is run to release a WGDT. Each WGDT has a design capacity of 600 cubic feet at STP and a design release rate of 22.5 cfm. Both the Containment Purge and the Incore Instrument Room Purge from each unit tie into the waste gas header. The Containment Purge exhausts at a maximum of 28,000 cfm and is monitored by radiation monitors 1,2-RM-90-130,131. If the Incore Instrument Room Purge is operating exclusively, it exhausts at 800 cfm. Under emergency conditions, and sometimes during normal operation, the EGTS is used to draw a vacuum in the annulus and exhaust to the Shield Building Vent. Auxiliary Building Isolation starts both the ABGTS and EGTS. The common header exhausts to the Shield Building Exhaust. There is one exhaust for each unit. This exhausts at a maximum design flow of 28,000 cfm and is monitored by radiation monitors 1,2-RM-90-400.

33

7.1 INSTRUMENT SETPOINTS

Airborne effluent monitor setpoints are determined to ensure that the dose rate at the UNRESTRICTED AREA BOUNDARY does not exceed the dose rate limits given in ODCM Control 1.2.2.1 and to identify unexpected releases.

33

7.1.1 Release Point Monitor Setpoints (1,2-RM-90-130,-131, 0-RM-90-118)

7.1.1.1 Containment Purge Effluent Monitors (1,2-RM-90-130,-131)

These monitors are set at a cpm value equal to a percentage of the Technical Specification Limit of $8.5 \times 10^{-3} \mu\text{Ci/cc}$ as Xe-133 (Technical Specification 3.3.2.1, Table 3.3-4).

7.1.1.2 Waste Gas Decay Tank Effluent Monitor (0-RM-90-118)

For each release from a waste gas decay tank, two setpoints are calculated for the monitor: one based on the expected response of the monitor to the radioactivity in the effluent stream; and a calculated maximum setpoint which corresponds to the most restrictive dose rate limit given in ODCM Control 1.2.2.1. The expected monitor response is calculated as described below in Equation 7.1. The maximum calculated setpoint is calculated as described below in Equation 7.2. A comparison is made between these two calculated setpoints to determine which is used. The actual monitor setpoint for the release is set equal to X times the expected monitor response, or to the maximum calculated setpoint, whichever is less. X is an administrative factor designed to account for expected variations in monitor response (it will be defined in approved plant instructions). The X times expected response setpoint allows for the identification of any release of radioactivity above the expected amount. The maximum calculated setpoint ensures that the release will be stopped if it exceeds the dose rate limits.

Expected Monitor Response

$$R = B + \sum_i \text{eff}_i C_i \quad (7.1)$$

where

- B = monitor background, cpm.
- eff_i = efficiency factor for the monitor for nuclide i, cpm per $\mu\text{Ci/cc}$.
- C_i = measured concentration of nuclide i, $\mu\text{Ci/cc}$.

Calculated Maximum Setpoint

The calculated maximum setpoint, S_{max} in cpm, corresponding to the dose rate limit is determined using the following equation:

$$S_{\text{max}} = (A \text{ SF} \left(\frac{\text{DR}_{\text{lim}}}{\text{DR}} (R - B) \right)) + B \quad (7.2)$$

where

- A = dose rate allocation factor for the release point, dimensionless. The dose rate allocation factors for release points are defined in approved plant procedures.
- SF = safety factor for the monitor, dimensionless. Safety factors for each monitor are defined in approved plant procedures.
- DR_{lim} = the dose rate limit, mrem/year.
 - = 500 mrem/year to the total body for noble gases,
 - = 3000 mrem/year to the skin for noble gases, and

- DR = the calculated dose rate for the release, mrem/year.
 = DR_{TB} for total body (as described in Section 7.2.3.1),
 = DR_S for skin (as described in Section 7.2.3.2), and
 R = expected monitor response (as calculated in Equation 7.1), cpm.
 B = the monitor background, cpm.

7.1.2 Discharge Point Monitor Setpoints (1,2-RE-90-400, 0-RM-90-101, 0-RM-90-132, 1,2-RM-90-119)

A normal default setpoint is determined for each discharge point monitor as described in Section 7.1.3. These setpoints on the discharge monitors will routinely be set equal to the default setpoints. When release permits are generated, the expected response and maximum calculated setpoints are calculated for the appropriate discharge monitor as described in Section 7.1.1.2. A comparison is made between the three setpoints as described below to choose the appropriate setpoint for the monitor during the release (after the release, the monitor should be returned to the default setpoint). For almost all releases, the setpoint for the discharge monitor will be the default setpoint.

1. If X^1 times the expected monitor response is less than the calculated maximum setpoint and less than the normal default setpoint, and the default setpoint is less than the calculated maximum

setpoint, then the setpoint shall be set equal to the normal default setpoint.

IF $X \cdot R < S_{max}$ AND $X \cdot R < S_{default}$ AND $S_{default} < S_{max}$
 THEN Setpoint = $S_{default}$

2. If X^1 times the expected monitor response is less than the calculated maximum setpoint, but greater than the normal default setpoint, and the normal default setpoint is less than the calculated maximum setpoint, then the setpoint shall be set equal to X^1 times the expected monitor response:

IF $X \cdot R < S_{max}$ AND $X \cdot R > S_{default}$ AND $S_{default} < S_{max}$
 THEN Setpoint = $X \cdot R$

3. If X^1 times the expected monitor response is less than the calculated maximum setpoint, and less than the normal default setpoint, and the normal default setpoint is greater than the calculated maximum setpoint, then the setpoint shall be set equal to the calculated maximum setpoint:

IF $X \cdot R < S_{max}$ AND $X \cdot R < S_{default}$ AND $S_{default} > S_{max}$
 THEN Setpoint = S_{max}

4. If X^1 times the expected monitor response is greater than the calculated maximum setpoint, the release should not be made under the assumed plant release conditions.

¹ X is an administrative factor designed to account for expected variations in monitor response. It will be defined in approved plant instructions.

7.1.3 Discharge Point Effluent Monitor Default Setpoints

7.1.3.1 Shield Building Vents (1,2-RE-90-400), Auxiliary Building Vent (0-RM-90-101), and Service Building Vent (0-RM-90-132)

These discharge point effluent monitors are set to ensure compliance with ODCM Control 1.2.2.1. The default setpoints are controlled by plant instructions and are based on design flowrate, release rate limits equivalent to the dose rate limits in ODCM Control 1.2.2.1, and the monitor efficiencies. The default setpoints for the shield building monitors are calculated in units of $\mu\text{Ci/sec}$.

33

7.1.3.2 Condenser Vacuum Exhaust Vent (1,2-RM-90-119)

This discharge point effluent monitor is set to ensure compliance with ODCM Control 1.2.2.1 and to identify the presence of primary to secondary leakage of radioactivity. The default setpoint is determined in one of two ways: by calculating the maximum calculated setpoint described by Equation 7.2 for Xe-133, and then taking a percentage of this value as the setpoint; or by defining the setpoint as a low value above the normal background. The default setpoint will be defined in plant instructions. Once a primary to secondary leak is identified, the setpoint on this monitor may be adjusted upward to enable it to be used to identify any further increases in the leak rate.

33

7.2 GASEOUS EFFLUENTS - DOSE RATES

7.2.1 (Deleted)

7.2.2 RELEASE SAMPLING

Prior to each release (excluding an Incore Instrument Room Purge), a grab sample is taken and analyzed to determine the concentration, $\mu\text{Ci/cc}$, of each noble gas nuclide. On at least a weekly basis, filters are analyzed to determine the amount of iodines and particulates released. Composite samples are maintained (as required by Table 2.2-2) to determine the concentration of certain nuclides (Sr-89, Sr-90, and alpha emitters).

For those nuclides whose activities are determined from composite samples the concentrations for the previous composite period will be assumed as the concentration for the next period to perform the calculations in Sections 7.3, 7.4, and 7.5. The actual measured concentrations will be used for the dose calculations described in Section 7.6.

7.2.3 NOBLE GAS DOSE RATES

Dose rates are calculated for total body and skin due to submersion within a cloud of noble gases using a semi-infinite cloud model.

7.2.3.1 Total Body Dose Rate

The dose rate to the total body, DR_{TB} in mrem/year, is calculated using the following equation:

$$DR_{TB} = (\lambda/Q) F \sum_i C_i DFB_i \quad (7.3)$$

where

λ/Q = relative concentration, s/m^3 . Relative air concentrations are calculated for the unrestricted area boundary in each of the sixteen sectors as described in Section 7.8.2 using the historical meteorological data for the period 1972-1975 given in Table 7.2. For dose rate calculations, the highest value from the sixteen unrestricted area boundary locations is used.

= $5.12\text{E-}06 \text{ s/m}^3$ (from Table 7.1).

F = flowrate of effluent stream, cc/s .

C_i = concentration of noble gas nuclide i in effluent stream, $\mu\text{Ci/cc}$.

DFB_i = total body dose factor due to gamma radiation for noble gas nuclide i , mrem/y per $\mu\text{Ci/m}^3$ (Table 7.3).

33

33

7.2.3.2 Skin Dose Rate

The dose rate to the skin, DR_S in mrem/year, is calculated using the following equation:

$$DR_S = (\lambda/Q) F \sum_i C_i (DFS_i + 1.11 DF_{\gamma i}) \quad (7.4)$$

where

λ/Q = relative concentration, s/m³. Relative air concentrations are calculated for the unrestricted area boundary in each of the sixteen sectors as described in Section 7.8.2 using the historical meteorological data for the period 1972-1975 given in Table 7.2. For dose rate calculations, the highest value from the sixteen unrestricted area boundary locations is used.

= 5.12E-06 s/m³ (from Table 7.1).

F = flowrate of effluent stream, cc/s.

C_i = concentration of noble gas nuclide i in effluent stream, $\mu\text{Ci/cc}$.

DFS_i = skin dose factor due to beta radiation for noble gas nuclide i , mrem/y per $\mu\text{Ci/m}^3$ (Table 7.3).

1.11 = the average ratio of tissue to air energy absorption coefficients, mrem/mrad.

$DF_{\gamma i}$ = dose conversion factor for external gamma for noble gas nuclide i , mrad/y per $\mu\text{Ci/m}^3$ (Table 7.3).

33

33

7.2.4 I-131, I-133, TRITIUM AND ALL RADIONUCLIDES IN PARTICULATE FORM WITH HALF-LIVES OF GREATER THAN 8 DAYS - ORGAN DOSE RATE

Organ dose rates due to I-131, I-133, Tritium and all radionuclides in particulate form with half-lives of greater than 8 days, DR_{org} in mrem/y, are calculated for all age groups (adult, teen, child, and infant) and all organs (bone, liver, total body, thyroid, kidney, lung, and GI Tract) using the following equation:

$$DR_{org} = F [C_T(\chi/Q)[R_{IT}+R_{CTP}] + \sum_i C_i[(\chi/Q)R_{II} + (D/Q) [R_{CPI} + RG_i]] \quad (7.5)$$

where:

F = flowrate of effluent stream, cc/s.

C_T = concentration of tritium in effluent stream, $\mu\text{Ci/cc}$.

χ/Q = relative concentration, s/m^3 . Relative air concentrations are calculated for the unrestricted area boundary in each of the sixteen sectors as described in Section 7.8.2 using the historical meteorological data for the period 1972-1975 given in Table 7.2. For dose rate calculations, the highest value from the sixteen unrestricted area boundary locations is used. | 33

= $5.12\text{E-}06 \text{ s/m}^3$ (from Table 7.1).

R_{IT} = inhalation dose factor for tritium, mrem/y per $\mu\text{Ci/m}^3$. Dose factor is calculated as described in Section 7.7.13.

R_{CTP} = Grass-cow-milk dose factor for tritium, mrem/y per $\mu\text{Ci/m}^3$. Dose factor is calculated as described in Section 7.7.7.

C_i = concentration of nuclide i in effluent stream, $\mu\text{Ci/cc}$.

R_{II} = inhalation dose factor for each identified nuclide i , mrem/y per $\mu\text{Ci/m}^3$. Dose factors are calculated as described in Section 7.7.13.

D/Q = relative deposition, $1/\text{m}^2$. Relative deposition is calculated for the unrestricted area boundary in each of the sixteen sectors as described in Section 7.8.3 using the historical meteorological data for the period 1972-1975 given in Table 7.2. For dose rate calculations, the highest value from the sixteen unrestricted area boundary locations is used. | 33

= $1.29\text{E-}08 \text{ 1/m}^2$ (from Table 7.1).

R_{CPI} = Grass-cow-milk dose factor for each identified nuclide i , $\text{m}^2\text{-mrem/y per } \mu\text{Ci/s}$. Dose factors are calculated as described in Section 7.7.1.

RG_i = ground plane dose factor for each identified nuclide i , $\text{m}^2\text{-mrem/y per } \mu\text{Ci/s}$. Dose factors are calculated as described in Section 7.7.14.

The maximum organ dose rate is selected from among the dose rates calculated for all the organs and all age groups.

7.3 DOSE - NOBLE GASES

Doses to be calculated are gamma and beta air doses due to exposure to an infinite cloud of noble gases. These doses will be calculated at the unrestricted area boundary location with the highest annual-average χ/Q based on 1972-1975 meteorological data (Table 7.2). This location is chosen from the UNRESTRICTED AREA BOUNDARY locations listed in Table 7.1. Dispersion factors are calculated using the methodology described in Section 7.8.2.

No credit is taken for radioactive decay.

7.3.1 Gamma dose to air

The gamma air dose, D_γ in mrad, is calculated for each release using the following equation:

$$D_\gamma = 1.9E-06 (\chi/Q) \sum_i Q_i DF_{\gamma i} T \quad (7.6)$$

where:

1.9E-06 = conversion factor, y/min.

χ/Q = highest unrestricted area boundary annual-average relative concentration, 5.12×10^{-6} s/m³ (from Table 7.1).

Q_i = release rate for nuclide i, $\mu\text{Ci/s}$.

$DF_{\gamma i}$ = dose conversion factor for external gamma for nuclide i (Table 7.3), mrad/y per $\mu\text{Ci/m}^3$.

T = duration of release, min.

The gamma-air dose calculated by this method will be used in the cumulative dose calculations discussed in Section 7.3.3.

7.3.2 Beta dose to air

The beta air dose, D_β in mrad, is calculated for each release using the following equation:

$$D_\beta = 1.9E-06 (\chi/Q) \sum_i Q_i DF_{\beta i} T \quad (7.7)$$

where:

1.9E-06 = conversion factor, y/min.

χ/Q = highest unrestricted area boundary annual-average relative concentration, 5.12×10^{-6} s/m³ (from Table 7.1).

Q_i = release rate for nuclide i, $\mu\text{Ci/s}$.

$DF_{\beta i}$ = dose conversion factor for external beta for nuclide i, mrad/y per $\mu\text{Ci/m}^3$ (from Table 7.3).

T = duration of release, min.

The beta-air dose calculated by this method will be used in the cumulative dose calculations discussed in Section 7.3.3.

7.3.3 Cumulative Dose - Noble Gas

Quarterly and annual sums of all doses are calculated for each release as described below to compare to the limits listed in ODCM Control 1.2.2.2.

For noble gases, cumulative doses are calculated for gamma and beta air doses. Doses due to each release are summed with the doses for all previous release in the quarter or year to obtain cumulative quarterly and annual doses.

7.3.4 Comparison to Limits

The cumulative calendar quarter and calendar year doses are compared to their respective limits once per 31 days to determine compliance.

7.4 DOSE DUE TO I-131, I-133, TRITIUM AND ALL RADIONUCLIDES IN PARTICULATE FORM WITH HALF-LIVES OF GREATER THAN 8 DAYS

7.4.1 Organ dose Calculation

Organ doses due to I-131, I-133, tritium and all radionuclides in particulate form with half-lives of greater than 8 days are calculated for each release for the critical receptor. The critical receptor is defined as the unrestricted area boundary in the sector with the highest annual average χ/Q . The annual average χ/Q and D/Q are calculated using the methodology in Sections 7.8.2 and 7.8.3 using the historical 1972-1975 meteorological data (Table 7.2). Pathways considered to exist at this location are inhalation, ground plane exposure, grass-cow-milk ingestion, grass-cow-beef ingestion and fresh leafy and stored vegetable ingestion. All age groups are considered (adult, teen, child and infant). Dose factors for these age groups and pathways are calculated as described in Section 7.7. For the ground exposure pathway, which has no age or organ specific dose factors, the total body dose will be added to the internal organ doses for all age groups. No credit is taken for radioactive decay.

The general equation for the calculation of organ dose is:

$$D_{org} = 3.17E-08 T \sum_i \sum_P R_{Pi} [W_P Q_i] \quad (7.8)$$

where:

3.17E-08 = conversion factor, y/s

T = duration of release, s.

R_{Pi} = dose factor for pathway P for each identified nuclide i, $m^2\text{-mrem/y}$ per $\mu\text{Ci/s}$ for ground plane, grass-cow-milk, grass-cow-meat, and vegetation pathways, and $m\text{rem/y}$ per $\mu\text{Ci/m}^3$ for inhalation and tritium ingestion pathways. Equations for calculating these dose factors are given in Section 7.7.

W_P = dispersion factor for the location and pathway,
= χ/Q for the inhalation and tritium ingestion pathways,
= $5.12E-06 \text{ s/m}^3$,
= D/Q for the food and ground plane pathways,
= $1.29E-08 \text{ m}^{-2}$

Q_i = release rate for radionuclide i, $\mu\text{Ci/s}$

From the four age groups considered, the maximum is determined by comparing all organ doses for all age groups. The age group with the highest single organ dose is selected as the critical age group. The organ doses for the critical age group will be used in the cumulative doses discussed in Section 7.4.2.

7.4.2 Cumulative Doses

Quarterly and annual sums of all doses are calculated for each release as described below to compare to the limits listed in ODCM Control 1.2.2.3.

For maximum organ dose, cumulative quarterly and annual doses are maintained for each of the eight organs considered. The cumulative dose is obtained by summing the doses for each organ of the critical age group (as calculated in Section 7.4.1) as determined for each release with the organ doses for all previous releases in the quarter or year to obtain the cumulative quarterly and annual doses. Thus, the cumulative organ doses will be conservative values, consisting of doses belonging to various age groups depending on the mix of radionuclides. The highest of these cumulative organ doses is used for the comparison to the limits described in ODCM Control 1.2.2.3.

7.4.3 Comparison to Limits

The cumulative calendar quarter and calendar year doses are compared to their respective limits once per 31 days to determine compliance.

7.5 DOSE PROJECTIONS

In accordance with ODCM Surveillance Requirement 2.2.2.4, dose projections will be performed. This will be done by maintaining running 31-day totals for the gamma dose, the beta dose and the maximum organ dose. Once per 31 days, these 31-day running totals will be compared to the limits given in ODCM Control 1.2.2.4 to determine compliance.

If the projected doses exceed any of these limits, the GASEOUS RADWASTE TREATMENT SYSTEM and the VENTILATION EXHAUST TREATMENT SYSTEM shall be used to reduce radioactive materials in gaseous effluents to areas at or beyond the UNRESTRICTED AREA BOUNDARY.

| 33

7.5.1 GASEOUS RADWASTE TREATMENT SYSTEM DESCRIPTION

The GASEOUS RADWASTE TREATMENT SYSTEM (GRTS) described below shall be maintained and operated to keep releases ALARA.

A flow diagram for the GRTS is given in Figure 7.3. The system consists of two waste-gas compressor packages, nine gas decay tanks, and the associated piping, valves, and instrumentation. Gaseous wastes are received from the following: degassing of the reactor coolant and purging of the volume control tank prior to a cold shutdown, displacing of cover gases caused by liquid accumulation in the tanks connected to the vent header, and boron recycle process operation.

7.6 QUARTERLY DOSE CALCULATIONS

A complete dose analysis utilizing the total estimated gaseous releases for each calendar quarter will be performed and reported as required in ODCM Administrative Control 5.2. Methodology for this analysis is that which is described in this section using the quarterly release values reported by the plant personnel. All real pathways and receptor locations identified by the most recent land use survey are considered. In addition, actual meteorological data representative of a ground level release for each corresponding calendar quarter will be used. For iodine releases, it is assumed that half the iodine released is in organic form. Organic iodine causes a dose only by inhalation. For cow-milk and beef ingestion doses, the fraction of the time the animals are on stored feed (identified in the survey) is used in the calculation.

The highest organ dose for a real receptor is determined by summing the dose contribution from all identified pathways for each receptor including ground contamination, inhalation, vegetable ingestion (for identified garden locations), cow and/or goat milk ingestion (if a cow or goat is identified for the location), beef ingestion (the beef ingestion dose for the location of highest beef dose for all receptors will be considered the beef dose for all receptors).

7.6.1 NOBLE GAS - GAMMA AIR DOSE

Gamma air doses due to exposure to noble gases, D_γ in mrem, are calculated using the following equation:

$$D_\gamma = \chi_{im} DF_{\gamma i} \quad (7.9)$$

where:

χ_{im} = concentration of nuclide i at location m , $\mu\text{Ci}/\text{m}^3$. Air concentrations are calculated as described by Equation 7.14.

$DF_{\gamma i}$ = dose conversion factor for external gamma for nuclide i , mrad/y per $\mu\text{Ci}/\text{m}^3$ (Table 7.3).

7.6.2 NOBLE GAS - BETA AIR DOSE

Beta air doses due to exposure to noble gases, D_β in mrem, are calculated using the following equation:

$$D_\beta = \chi_{im} DF_{\beta i} \quad (7.10)$$

where:

χ_{im} = concentration of nuclide i at location m , $\mu\text{Ci}/\text{m}^3$. Air concentrations are calculated as described by Equation 7.14.

$DF_{\beta i}$ = dose conversion factor for external beta for nuclide i , mrad/y per $\mu\text{Ci}/\text{m}^3$ (Table 7.3).

7.6.3 RADIOIODINE, PARTICULATE AND TRITIUM - MAXIMUM ORGAN DOSE

Organ doses due to radioiodine, particulate and tritium releases, D_{org} in mrem, are calculated using the following equation:

$$D_{org} = 3.17E-08 \left(\sum_P \left(\frac{\lambda}{Q} \right) R_{PT} Q_T \right) \sum_I \left(\frac{D}{Q} \right) \left(\sum_P R_{Pi} + \left(\frac{D}{Q} \right) R_{Gi} + \left(\frac{\lambda}{Q} \right) R_{Ii} \right) Q_i \quad (7.11)$$

where:

$3.17E-08$ = conversion factor, y/s.

λ/Q = Relative concentration for location under consideration, s/m³. Relative concentrations are calculated as described by Equation 7.15.

R_{PT} = ingestion dose factor for pathway P for tritium, m²-mrem/y per μ Ci/s. Ingestion pathways available for consideration are the same as those listed above for R_{Pi} . Equations for calculating ingestion dose factors for tritium are given in Sections 7.7.7 through 7.7.12.

Q_T = adjusted release rate for tritium for location under consideration, μ Ci/s. Calculated in the same manner as Q_i above.

R_{Pi} = ingestion dose factor for pathway P for each identified nuclide i (except tritium), m²-mrem/y per μ Ci/s. Ingestion pathways available for consideration include:

- pasture grass-cow-milk ingestion
- stored feed-cow-milk ingestion
- pasture grass-goat-milk ingestion
- stored feed-goat-milk ingestion
- pasture grass-beef ingestion
- stored feed-beef ingestion
- fresh leafy vegetable ingestion
- stored vegetable ingestion

Equations for calculating these ingestion dose factors are given in Sections 7.7.1 through 7.7.6.

D/Q = Relative deposition for location under consideration, m⁻². Relative deposition is calculated as described in Equation 7.16.

R_{Gi} = Dose factor for standing on contaminated ground, m²-mrem/y per μ Ci/s. The equation for calculating the ground plane dose factor is given in Section 7.7.14.

R_{Ii} = Inhalation dose factor, mrem/y per μ Ci/m³. The equation for calculating the inhalation dose factor is given in Section 7.7.13.

Q_i = adjusted release rate for nuclide i for location under consideration, μ Ci/s. The initial release rate is adjusted to account for decay between the release point and the location, depending on the frequency of wind speeds applicable to that sector. Hence, the adjusted release rate is equal to the actual release rate decayed for an average travel time during the period.

$$Q_{i0} \sum_{j=1}^9 f_j \exp(-\lambda_i x/u_j) \quad (7.12)$$

where

Q_{i0} = initial average release rate for nuclide i over the period, μ Ci/s.

f_j = joint relative frequency of occurrence of winds in windspeed class j blowing toward this exposure point, expressed as a fraction.

λ_i = radiological decay constant for nuclide i, s⁻¹.

x = downwind distance, meters.

u_j = midpoint value of wind speed class interval j, m/s.

7.6.4 POPULATION DOSES

For determining population doses to the 50-mile population around the plant, each compass sector is broken down into elements. These elements are defined in Table 7.4. For each of these sector elements, an average dose is calculated, and then multiplied by the population in that sector element. Dispersion factors are calculated for the midpoint of each sector element (see Table 7.4).

For population doses resulting from ingestion, it is conservatively assumed that all food eaten by the average individual is grown locally.

The general equation used for calculating the population dose in a given sector element is:

$$\text{Dose}_{\text{pop}} = \sum_P \text{RATIO}_P * \text{POPN} * \text{AGE} * 0.001 * \text{DOSE}_P \quad (7.13)$$

where

- RATIO_P = ratio of average to maximum dose for pathway P. (Average ingestion rates are obtained from Regulatory Guide 1.109, Table E-4.)
 = 0.5 for submersion and ground exposure pathways, a shielding/occupancy factor.
 = 1.0 for the inhalation pathway.
 = 0.515, 0.515, 0.5, and 0.355 for milk, for infant, child, teen and adult, respectively. (It is assumed that the ratio of average to maximum infant milk ingestion rates is the same as that for child.)
 = 1.0, 0.90, 0.91, 0.86 for beef ingestion, for infant, child, teen and adult, respectively.
 = 1.0, 0.38, 0.38, 0.37 for vegetable ingestion, for infant, child, teen and adult, respectively. (It is assumed that the average individual eats no fresh leafy vegetables, only stored vegetables.)
- POPN = the population of the sector element, persons (Table 7.5).
- AGE = fraction of the population belonging to each age group.
 = 0.015, 0.168, 0.153, 0.665 for infant, child, teen and adult, respectively (fractions taken from NUREG/CR-1004, Table 3.39).
- 0.001 = conversion from mrem to rem.
- DOSE_P = the dose for pathway P to the maximum individual at the location under consideration, mrem. For ingestion pathways, this dose is multiplied by an average decay correction to account for decay as the food is moved through the food distribution cycle. This average decay correction, ADC, is defined as follows:

For milk and vegetables, $\text{ADC} = \exp(-\lambda_i t)$

where

λ_i = decay constant for nuclide i, s.

t = distribution time for food product under consideration (values from Regulatory Guide 1.109, Table D-1).

= 1.21E+06 s (14 d) for vegetables.

= 3.46E+05 s (4 d) for milk.

$$\text{For meat, ADC} = \frac{\exp(-\lambda_i t) \lambda_i t_{\text{cb}}}{1 - \exp(-\lambda_i t_{\text{cb}})}$$

where

λ_i = decay constant for nuclide i, s.

- t = additional distribution time for meat, over and above the time for slaughter to consumption described in Section 7.7.3, 7 d.
 t_{cb} = time to consume a whole beef, as described in Section 7.7.3.

For beef ingestion, the additional factors in the calculation of ADC negate the integration of the dose term over the period during which a whole beef is consumed, for the calculation of population dose. In other words, this assumes that the maximum individual freezes and eats a whole beef, while the average individual buys smaller portions at a time.

Population doses are summed over all sector elements to obtain a total population dose for the 50-mile population.

7.6.5 REPORTING OF DOSES

The calculated quarterly doses and calculated population doses described in this section are reported in the Annual Effluent Release Report as required by ODCM Administrative Control 5.2.

7.6.6 DOSE TO A MEMBER OF THE PUBLIC INSIDE THE UNRESTRICTED AREA BOUNDARY

The Basis for ODCM Control 1.2.2.1 states that for MEMBERS OF THE PUBLIC who may at times be within the UNRESTRICTED AREA BOUNDARY, the occupancy factor of that MEMBER OF THE PUBLIC will usually be sufficiently low to compensate for any increase in the atmospheric dispersion factor above that for the UNRESTRICTED AREA BOUNDARY. This basis also states that examples of calculations for such MEMBERS OF THE PUBLIC will be given in the ODCM.

The determination presented here assumes that the most exposed MEMBER OF THE PUBLIC will be an adult TVA employee who works just outside the restricted area fence for the entire workyear (2000 hours). Results from onsite Thermoluminescent Dosimeter (TLD) measurements from the years 1990-1992 indicate that the highest onsite external dose was 72.6 mrem. Using this value, subtracting an annual background value of 55 mrem/year, and multiplying by the ratio of the occupancy times, the highest external dose to a MEMBER OF THE PUBLIC inside the UNRESTRICTED AREA BOUNDARY is 4 mrem. Historical records show that the total dose contribution from effluent releases is normally less than 2 mrem. The combination of the measured direct dose (part of which is from effluent releases) and the calculated effluent dose will be below both the 10 CFR Part 20 limit of 100 mrem/year and the 40 CFR Part 190 limit of 25 mrem/year. In addition to this analysis, the dose to this hypothetical MEMBER OF THE PUBLIC will be determined on an annual basis (using the methodology above) to ensure that the actual dose to any individual is less than 100 mrem/year. The results of this review will be included in the Annual Radiological Effluent Report pursuant to ODCM Administrative Control 5.2.

| 33

| 33

| 33

32

| 33

7.7 GASEOUS RELEASES - Dose Factors

7.7.1 PASTURE GRASS-COW/GOAT-MILK INGESTION DOSE FACTORS (m²-mrem/y per μCi/s)

$$RCP_i = 10^6 DFL_{iao} U_{ap} F_{mi} Q_f \exp(-\lambda_i t_{fm}) f_p \left\{ \frac{r(1-\exp(-\lambda_E t_{ep}))}{Y_p \lambda_E} + \frac{B_{iv}(1-\exp(-\lambda_i t_b))}{P \lambda_i} \right\}$$

where:

10^6 = conversion factor, pCi/μCi.

DFL_{iao} = ingestion dose conversion factor for nuclide i, age group a, organ o, mrem/pCi (Table 6.4).

U_{ap} = milk ingestion rate for age group a, L/y.

F_{mi} = transfer factor for nuclide i from animal's feed to milk, d/L (Table 6.2).

Q_f = animal's consumption rate, kg/d.

λ_i = decay constant for nuclide i, s⁻¹ (Table 6.2).

t_{fm} = transport time from milking to receptor, s.

f_p = fraction of time animal spends on pasture, dimensionless.

r = fraction of activity retained on pasture grass, dimensionless.

λ_E = the effective decay constant, due to radioactive decay and weathering, s⁻¹, equal to $\lambda_i + \lambda_w$.

λ_w = weathering decay constant for leaf and plant surfaces, s⁻¹.

t_{ep} = time pasture is exposed to deposition, s.

Y_p = agricultural productivity by unit area of pasture grass, kg/m².

B_{iv} = transfer factor for nuclide i from soil to vegetation, pCi/kg (wet weight of vegetation) per pCi/kg (dry soil).

t_b = time period over which accumulation on the ground is evaluated, s.

P = effective surface density of soil, kg/m².

NOTE: Factors defined above which do not reference a table for their numerical values are given in Table 6.3.

7.7.2 STORED FEED-COW/GOAT-MILK INGESTION DOSE FACTORS

(m²-mrem/y per μ Ci/s)

$$RCS_i = 10^6 DFL_{iao} U_{ap} F_{mi} Q_f f_s \exp(-\lambda_i t_{fm}) \left\{ \frac{(1 - \exp(-\lambda_i t_{csf}))}{t_{csf} \lambda_i} \left(\frac{r(1 - \exp(-\lambda_E t_{esf}))}{Y_{sf} \lambda_E} + \frac{B_{iv}(1 - \exp(-\lambda_i t_b))}{P \lambda_i} \right) \right\}$$

where:

10^6 = conversion factor, pCi/ μ Ci.

DFL_{iao} = ingestion dose conversion factor for nuclide i, age group a, organ o, mrem/pCi (Table 6.4).

U_{ap} = milk ingestion rate for age group a, L/y.

F_{mi} = transfer factor for nuclide i from animal's feed to milk, d/L (Table 6.2).

Q_f = animal's consumption rate, kg/d.

f_s = fraction of time animal spends on stored feed, dimensionless.

λ_i = decay constant for nuclide i, s⁻¹ (Table 6.2).

t_{fm} = transport time from milking to receptor, s.

t_{csf} = time between harvest of stored feed and consumption by animal, s.

r = fraction of activity retained on pasture grass, dimensionless.

λ_E = the effective decay constant, due to radioactive decay and weathering, s⁻¹, equal to $\lambda_i + \lambda_w$.

λ_w = weathering decay constant for leaf and plant surfaces, s⁻¹.

t_{esf} = time stored feed is exposed to deposition, s.

Y_{sf} = agricultural productivity by unit area of stored feed, kg/m².

B_{iv} = transfer factor for nuclide i from soil to vegetation, pCi/kg (wet weight of vegetation) per pCi/kg (dry soil).

t_b = time period over which accumulation on the ground is evaluated, s.

P = effective surface density of soil, kg/m².

NOTE: Factors defined above which do not reference a table for their numerical values are given in Table 6.3.

7.7.3 PASTURE GRASS-BEEF INGESTION DOSE FACTORS

(m²-mrem/y per μCi/s)

$$RMP_i = 10^6 DFL_{iao} U_{am} F_{Fi} Q_F \frac{(1 - \exp(-\lambda_i t_{cb}))}{\lambda_i t_{cb}} \exp(-\lambda_i t_S) f_p \left\{ \frac{r(1 - \exp(-\lambda_E t_{ep}))}{Y_p \lambda_E} + \frac{B_N(1 - \exp(-\lambda_i t_b))}{P \lambda_i} \right\}$$

where:

10^6 = conversion factor, pCi/μCi.

DFL_{iao} = ingestion dose conversion factor for nuclide i, age group a, organ o, mrem/pCi (Table 6.4).

U_{am} = meat ingestion rate for age group a, kg/y.

F_{Fi} = transfer factor for nuclide i from cow's feed to meat, d/kg (Table 6.2).

Q_F = cow's consumption rate, kg/d.

λ_i = decay constant for nuclide i, s⁻¹ (Table 6.2).

t_{cb} = time for receptor to consume a whole beef, s.

t_S = transport time from slaughter to consumer, s.

f_p = fraction of time cow spends on pasture, dimensionless.

r = fraction of activity retained on pasture grass, dimensionless.

λ_E = the effective decay constant, due to radioactive decay and weathering, s⁻¹, equal to $\lambda_i + \lambda_w$.

λ_w = weathering decay constant for leaf and plant surfaces, s⁻¹.

t_{ep} = time pasture is exposed to deposition, s.

Y_p = agricultural productivity by unit area of pasture grass, kg/m².

B_N = transfer factor for nuclide i from soil to vegetation, pCi/kg (wet weight of vegetation) per pCi/kg (dry soil).

t_b = time over which accumulation on the ground is evaluated, s.

P = effective surface density of soil, kg/m².

NOTE: Factors defined above which do not reference a table for their numerical values are given in Table 6.3.

7.7.4 STORED FEED-BEEF INGESTION DOSE FACTORS

(m²-mrem/y per μCi/s)

$$RMS_i = 10^6 DFL_{iso} U_{am} F_{Fi} Q_F \frac{(1-\exp(-\lambda_i t_{cb}))}{\lambda_i t_{cb}} \exp(-\lambda_i t_s) f_s \frac{(1-\exp(-\lambda_i t_{csf}))}{\lambda_i t_{csf}} \left\{ \frac{r(1-\exp(-\lambda_E t_{esf}))}{Y_{sf} \lambda_E} + \frac{B_N(1-\exp(-\lambda_i t_b))}{P \lambda_i} \right\}$$

where:

- 10⁶ = conversion factor, pCi/μCi.
- DFL_{iso} = ingestion dose conversion factor for nuclide i, age group a, organ o, mrem/pCi (Table 6.4).
- U_{am} = meat ingestion rate for age group a, kg/y.
- F_{Fi} = transfer factor for nuclide i from cow's feed to meat, d/kg (Table 6.2).
- Q_F = cow's consumption rate, kg/d.
- λ_i = decay constant for nuclide i, s⁻¹ (Table 6.2).
- t_{cb} = time for receptor to consume a whole beef, s.
- t_s = transport time from slaughter to consumer, s.
- f_s = fraction of time cow spends on stored feed, dimensionless.
- t_{csf} = time between harvest of stored feed and consumption by cow, s.
- r = fraction of activity retained on pasture grass, dimensionless.
- t_{esf} = time stored feed is exposed to deposition, s.
- Y_{sf} = agricultural productivity by unit area of stored feed, kg/m².
- λ_E = the effective decay constant, due to radioactive decay and weathering, s⁻¹, equal to λ_i+λ_w.
- λ_w = weathering decay constant for leaf and plant surfaces, s⁻¹.
- B_N = transfer factor for nuclide i from soil to vegetation, pCi/kg (wet weight of vegetation) per pCi/kg (dry soil).
- t_b = time over which accumulation on the ground is evaluated, s.
- P = effective surface density of soil, kg/m².

NOTE: Factors defined above which do not reference a table for their numerical values are given in Table 6.3.

7.7.5 FRESH LEAFY VEGETABLE INGESTION DOSE FACTORS

(m²-mrem/y per μ Ci/s)

$$RVF_i = 10^6 DFL_{iao} e(-\lambda_i t_{hc}) UFL_a f_L \left\{ \frac{r(1-e(-\lambda_E t_e))}{Y_F \lambda_E} + \frac{B_{iv}(1-e(-\lambda_i t_b))}{P \lambda_i} \right\}$$

where:

10^6 = conversion factor, pCi/ μ Ci.

DFL_{iao} = ingestion dose conversion factor for nuclide i, age group a, organ o, mrem/pCi (Table 6.4).

λ_i = decay constant for nuclide i, s⁻¹ (Table 6.2).

t_{hc} = average time between harvest of vegetables and their consumption and/or storage, s.

UFL_a = consumption rate of fresh leafy vegetables by the receptor in age group a, kg/y.

f_L = fraction of fresh leafy vegetables grown locally, dimensionless.

r = fraction of deposited activity retained on vegetables, dimensionless.

λ_E = the effective decay constant, due to radioactive decay and weathering, s⁻¹,
= $\lambda_i + \lambda_w$

λ_w = decay constant for removal of activity on leaf and plant surfaces by weathering, s⁻¹.

t_e = exposure time in garden for fresh leafy and/or stored vegetables, s.

Y_F = agricultural yield for fresh leafy vegetables, kg/m².

B_{iv} = transfer factor for nuclide i from soil to vegetables, pCi/kg (wet weight of vegetation) per pCi/kg (dry soil).

t_b = time period over which accumulation on the ground is evaluated, s.

P = effective surface density of soil, kg/m².

NOTE: Factors defined above which do not reference a table for their numerical values are given in Table 6.3.

7.7.6 STORED VEGETABLE INGESTION DOSE FACTORS

m²-mrem/y per $\mu\text{Ci/s}$

$$RVS_i = 10^6 \text{DFL}_{iao} \exp(-\lambda_i t_{hc}) U_{Sa} f_g \frac{(1 - e(-\lambda_i t_{sv}))}{\lambda_i t_{sv}} \left\{ \frac{r(1 - e(-\lambda_E t_e))}{Y_{sv} \lambda_E} + \frac{B_{iv}(1 - e(-\lambda_i t_b))}{P \lambda_i} \right\}$$

where:

10^6 = conversion factor, pCi/ μCi .

DFL_{iao} = ingestion dose conversion factor for nuclide i, age group a, organ o, mrem/pCi (Table 6.4).

λ_i = decay constant for nuclide i, s⁻¹ (Table 6.2).

t_{hc} = average time between harvest of vegetables and their consumption and/or storage, s.

U_{Sa} = consumption rate of stored vegetables by the receptor in age group a, kg/y.

f_g = fraction of stored vegetables grown locally, dimensionless.

t_{sv} = time between storage of vegetables and their consumption, s.

r = fraction of deposited activity retained on vegetables, dimensionless.

λ_E = the effective decay constant, due to radioactive decay and weathering, s⁻¹.

$\lambda_E = \lambda_i + \lambda_w$

λ_w = decay constant for removal of activity on leaf and plant surfaces by weathering, s⁻¹.

t_e = exposure time in garden for fresh leafy and/or stored vegetables, s.

Y_{sv} = agricultural yield for stored vegetables, kg/m².

B_{iv} = transfer factor for nuclide i from soil to vegetables, pCi/kg (wet weight of vegetation) per pCi/kg (dry soil).

t_b = time period over which accumulation on the ground is evaluated, s.

P = effective surface density of soil, kg/m².

NOTE: Factors defined above which do not reference a table for their numerical values are given in Table 6.3.

7.7.7 TRITIUM-PASTURE GRASS-COW/GOAT-MILK DOSE FACTOR (mrem/y per $\mu\text{Ci}/\text{m}^3$)

$$\text{RCT}_P = 10^3 10^6 \text{DFL}_{\text{Tao}} F_{\text{mT}} Q_F U_{\text{ap}} [0.75(0.5/H)] f_p \exp(-\lambda_T t_{\text{Fm}})$$

where:

- 10^3 = conversion factor, g/kg.
- 10^6 = conversion factor, pCi/ μCi .
- DFL_{Tao} = ingestion dose conversion factor for tritium for age group a, organ o, mrem/pCi (Table 6.4).
- F_{mT} = transfer factor for tritium from animal's feed to milk, d/L (Table 6.2).
- Q_F = animal's consumption rate, kg/d.
- U_{ap} = milk ingestion rate for age group a, L/y.
- 0.75 = the fraction of total feed that is water.
- 0.5 = the ratio of the specific activity of the feed grass water to the atmospheric water.
- H = absolute humidity of the atmosphere, g/m³.
- f_p = fraction of time animal spends on pasture, dimensionless.
- λ_T = decay constant for tritium, s⁻¹ (Table 6.2).
- t_{Fm} = transport time from milking to receptor, s.

7.7.8 TRITIUM-STORED FEED-COW/GOAT-MILK DOSE FACTOR (mrem/y per $\mu\text{Ci}/\text{m}^3$)

$$\text{RCT}_S = 10^3 10^6 \text{DFL}_{\text{Tao}} F_{\text{FT}} Q_F U_{\text{am}} [0.75(0.5/H)] f_S \exp(-\lambda_T t_S) \frac{(1-\exp(-\lambda_T t_{\text{ep}}))}{\lambda_T t_{\text{csf}}} \frac{(1-\exp(-\lambda_T t_{\text{cb}}))}{\lambda_T t_{\text{cb}}}$$

where:

- 10^3 = conversion factor, g/kg.
- 10^6 = conversion factor, pCi/ μCi .
- DFL_{Tao} = ingestion dose conversion factor for H-3 for age group a, organ o, mrem/pCi (Table 6.4).
- F_{FT} = transfer factor for H-3 from cow's feed to meat, d/kg (Table 6.2).
- Q_F = cow's consumption rate, kg/d.
- U_{am} = meat ingestion rate for age group a, kg/y.
- 0.75 = the fraction of total feed that is water.
- 0.5 = the ratio of the specific activity of the feed grass water to the atmospheric water.
- H = absolute humidity of the atmosphere, g/m³.
- f_S = fraction of time cow spends on stored feed, dimensionless.
- λ_T = decay constant for tritium, s⁻¹ (Table 6.2).
- t_S = transport time from slaughter to consumer, s.
- t_{csf} = time to consume stored feed, s.
- t_{cb} = time for receptor to consume a whole beef, s.

NOTE: Factors defined above which do not reference a table for their numerical values are given in Table 6.3.

7.7.9 TRITIUM-PASTURE GRASS-BEEF DOSE FACTOR

(mrem/y per $\mu\text{Ci}/\text{m}^3$)

$$\text{RMTP} = 10^3 10^6 \text{DFL}_{\text{Tao}} F_{\text{FT}} Q_{\text{F}} \text{am} [0.75(0.5/\text{H})] f_{\text{p}} \exp(-\lambda_{\text{T}} t_{\text{S}}) \frac{(1-\exp(-\lambda_{\text{T}} t_{\text{ep}}))}{\lambda_{\text{T}} t_{\text{ep}}} \frac{(1-\exp(-\lambda_{\text{T}} t_{\text{cb}}))}{\lambda_{\text{T}} t_{\text{cb}}}$$

where:

- 10^3 = conversion factor, g/kg.
- 10^6 = conversion factor, pCi/ μCi .
- DFL_{Tao} = ingestion dose conversion factor for H-3 for age group a, organ o, mrem/pCi (Table 6.4).
- F_{FT} = transfer factor for H-3 from cow's feed to meat, d/kg (Table 6.2).
- Q_{F} = cow's consumption rate, kg/d.
- Uam = meat ingestion rate for age group a, kg/y.
- 0.75 = the fraction of total feed that is water.
- 0.5 = the ratio of the specific activity of the feed grass water to the atmospheric water.
- H = absolute humidity of the atmosphere, g/ m^3 .
- f_{p} = fraction of time cow spends on pasture, dimensionless.
- λ_{T} = decay constant for tritium, s^{-1} (Table 6.2).
- t_{S} = transport time from slaughter to consumer, s.
- t_{ep} = time pasture is exposed to deposition, s.
- t_{cb} = time for receptor to consume a whole beef, s.

7.7.10 TRITIUM-STORED FEED-BEEF DOSE FACTOR

(mrem/y per $\mu\text{Ci}/\text{m}^3$)

$$\text{RMTS} = 10^3 10^6 \text{DFL}_{\text{Tao}} F_{\text{FT}} Q_{\text{F}} \text{Uam} [0.75(0.5/\text{H})] f_{\text{S}} \exp(-\lambda_{\text{T}} t_{\text{S}}) \frac{(1-\exp(-\lambda_{\text{T}} t_{\text{ep}}))}{\lambda_{\text{T}} t_{\text{csf}}} \frac{(1-\exp(-\lambda_{\text{T}} t_{\text{cb}}))}{\lambda_{\text{T}} t_{\text{cb}}}$$

where:

- 10^3 = conversion factor, g/kg.
- 10^6 = conversion factor, pCi/ μCi .
- DFL_{Tao} = ingestion dose conversion factor for H-3 for age group a, organ o, mrem/pCi (Table 6.4).
- F_{FT} = transfer factor for H-3 from cow's feed to meat, d/kg (Table 6.2).
- Q_{F} = cow's consumption rate, kg/d.
- Uam = meat ingestion rate for age group a, kg/y.
- 0.75 = the fraction of total feed that is water.
- 0.5 = the ratio of the specific activity of the feed grass water to the atmospheric water.
- H = absolute humidity of the atmosphere, g/ m^3 .
- f_{S} = fraction of time cow spends on stored feed, dimensionless.
- λ_{T} = decay constant for tritium, s^{-1} (Table 6.2).
- t_{S} = transport time from slaughter to consumer, s.
- t_{csf} = time to consume stored feed, s.
- t_{cb} = time for receptor to consume a whole beef, s.

NOTE: Factors defined above which do not reference a table for their numerical values are given in Table 6.3.

7.7.11 TRITIUM-FRESH LEAFY VEGETABLES DOSE FACTOR (mrem/y per $\mu\text{Ci}/\text{m}^3$)

$$\text{RVTF} = 10^3 10^6 \text{DFL}_{\text{Tao}} [0.75(0.5/H)] U_{\text{FLa}} f_L \exp(-\lambda_T t_{\text{hc}})$$

where:

10^3 = conversion factor, g/kg.

10^6 = conversion factor, pCi/ μCi .

DFL_{Tao} = ingestion dose conversion factor for tritium for age group a, organ o, mrem/pCi (Table 6.4).

0.75 = the fraction of total vegetation that is water.

0.5 = the ratio of the specific activity of the vegetables water to the atmospheric water.

H = absolute humidity of the atmosphere, g/ m^3 .

U_{FLa} = consumption rate of fresh leafy vegetables by the receptor in age group a, kg/y.

f_L = fraction of fresh leafy vegetables grown locally, dimensionless.

λ_T = decay constant for tritium, s^{-1} (Table 6.2).

t_{hc} = time between harvest of vegetables and their consumption and/or storage, s.

NOTE: Factors defined above which do not reference a table for their numerical values are given in Table 6.3.

7.7.12 TRITIUM-STORED VEGETABLES DOSE FACTOR

(mrem/year per $\mu\text{Ci}/\text{m}^3$)

$$\text{RVT}_S = 10^3 10^6 \text{DFL}_{\text{Tao}} [0.75(0.5/H)] U_{\text{Sa}} f_g \frac{(1 - \exp(-\lambda_T t_{\text{Sv}}))}{\lambda_T t_{\text{Sv}}} \exp(-\lambda_T t_{\text{hc}})$$

where:

- 10^3 = conversion factor, g/kg.
- 10^6 = conversion factor, pCi/ μCi .
- DFL_{Tao} = ingestion dose conversion factor for tritium for age group a, organ o, mrem/pCi (Table 6.4).
- 0.75 = the fraction of total vegetation that is water.
- 0.5 = the ratio of the specific activity of the vegetation water to the atmospheric water.
- H = absolute humidity of the atmosphere, g/ m^3 .
- U_{Sa} = consumption rate of stored vegetables by the receptor in age group a, kg/y.
- f_g = fraction of stored vegetables grown locally, dimensionless.
- λ_T = decay constant for tritium, s^{-1} (Table 6.2).
- t_{Sv} = time between harvest of stored vegetables and their consumption and/or storage, s.
- t_{hc} = time between harvest of vegetables and their storage, s.

7.7.13 INHALATION DOSE FACTORS

(mrem/y per $\mu\text{Ci}/\text{m}^3$)

$$\text{RI}_i = \text{DFA}_{\text{iao}} \text{BR}_a 10^6$$

where:

- DFA_{iao} = inhalation dose conversion factor for nuclide i, age group a and organ o, mrem/pCi (Table 7.7).
- BR_a = breathing rate for age group a, m^3/y (Table 6.3).
- 10^6 = conversion factor, pCi/ μCi .

7.7.14 GROUND PLANE DOSE FACTORS

(m^2 -mrem/y per $\mu\text{Ci}/\text{s}$)

$$\text{RG}_i = \text{DFG}_{\text{io}} 1/\lambda_i 10^6 8760 [1 - \exp(-\lambda_i t_b)]$$

where:

- DFG_{io} = dose conversion factor for standing on contaminated ground for nuclide i and organ o (total body and skin), mrem/hr per pCi/ m^2 (Table 6.6).
- λ_i = decay constant of nuclide i, s^{-1} (Table 6.2).
- 10^6 = conversion factor, pCi/ μCi .
- 8760 = conversion factor, h/y.
- t_b = time period over which the ground accumulation is evaluated, s (Table 6.3).

7.8 DISPERSION METHODOLOGY

Dispersion factors are calculated for radioactive effluent releases using hourly average meteorological data consisting of wind speed and direction measurements at 10m and temperature measurements at 9m and 46m.

A sector-average dispersion equation consistent with Regulatory Guide 1.111 is used. The dispersion model considers plume depletion (using information from Figure 7.4), and building wake effects. Terrain effects on dispersion are not considered.

Hourly average meteorological data are expressed as a joint-frequency distribution of wind speed, wind direction, and atmospheric stability. The joint-frequency distribution which represents the historical meteorological data for the period January 1972 to December 1975 is given in Table 7.2.

The wind speed classes that are used are as follows:

Number	Range (m/s)	Midpoint (m/s)
1	<0.3	0.13
2	0.3-0.6	0.45
3	0.7-1.5	1.10
4	1.6-2.4	1.99
5	2.5-3.3	2.88
6	3.4-5.5	4.45
7	5.6-8.2	6.91
8	8.3-10.9	9.59
9	>10.9	10.95

The stability classes that will be used are the standard A through G classifications. The stability classes 1-7 will correspond to A=1, B=2, ..., G=7.

7.8.1 AIR CONCENTRATION

Air concentrations of nuclides at downwind locations are calculated using the following equation:

$$\chi_i = \sum_{j=1}^9 \sum_{k=1}^7 \frac{f_{jk} Q_i p}{\sum_{zk} u_j (2\pi x/n)} \exp(-\lambda_i x/u_j) \quad (7.14)$$

where

- f_{jk} = joint relative frequency of occurrence of winds in windspeed class j, stability class k, blowing toward this exposure point, expressed as a fraction.
- Q_i = average annual release rate of radionuclide i, $\mu\text{Ci/s}$.
- p = fraction of radionuclide remaining in plume (Figure 7.4).
- \sum_{zk} = vertical dispersion coefficient for stability class k which includes a building wake adjustment,
 $= (\sigma_{zk}^2 + cA/\pi)^{1/2}$,
or $= (3)^{1/2} \sigma_{zk}$, whichever is smaller.
where
 σ_{zk} is the vertical dispersion coefficient for stability class k (m) (Figure 7.5),
c is a building shape factor (c=0.5).

A is the minimum building cross-sectional area (1800 m²).
 u_j = midpoint value of wind speed class interval j, m/s.
 x = downwind distance, m.
 n = number of sectors, 16.
 λ_i = radioactive decay coefficient of radionuclide i, s⁻¹
 $2\pi x/n$ = sector width at point of interest, m.

7.8.2 RELATIVE CONCENTRATION

Relative concentrations of nuclides at downwind locations are calculated using the following equation:

$$\chi/Q = \sum_{j=1}^9 \sum_{k=1}^7 (2/\pi)^{1/2} \frac{f_{jk}}{\sum_{zk} u_j (2\pi x/n)} \quad (7.15)$$

where

f_{jk} = joint relative frequency of occurrence of winds in windspeed class j, stability class k, blowing toward this exposure point, expressed as a fraction.
 \sum_{zk} = vertical dispersion coefficient for stability class k which includes a building wake adjustment,
 $= (\sigma_{zk}^2 + cA/\pi)^{1/2}$,
or $= (3)^{1/2} \sigma_{zk}$, whichever is smaller.
where
 σ_{zk} is the vertical dispersion coefficient for stability class k (m) (Figure 7.5),
c is a building shape factor (c=0.5),
A is the minimum building cross-sectional area (1800 m²).

u_j = midpoint value of wind speed class interval j, m/s.
 x = downwind distance, m.
 n = number of sectors, 16.
 $2\pi x/n$ = sector width at point of interest, m.

7.8.3 RELATIVE DEPOSITION

Relative deposition of nuclides at downwind locations is calculated using the following equation:

$$D/Q = \sum_{j=1}^9 \sum_{k=1}^7 \frac{f_{jk} DR}{(2\pi x/n)} \quad (7.16)$$

where

f_{jk} = joint relative frequency of occurrence of winds in windspeed class j and stability class k, blowing toward this exposure point, expressed as a fraction.
DR = relative deposition rate, m⁻¹ (from Figure 7.6).
 x = downwind distance, m.
 n = number of sectors, 16.
 $2\pi x/n$ = sector width at point of interest, m.

Table 7.1 SQN - OFFSITE RECEPTOR LOCATION DATA

POINT		DISTANCE from plant (m)	χ/Q (s/m ³)	D/Q (1/m ²)
Unrestricted Area Boundary	N	950	5.12E-06	1.29E-08
Unrestricted Area Boundary	NNE	2260	1.93E-06	5.28E-09
Unrestricted Area Boundary	NE	1910	2.32E-06	6.33E-09
Unrestricted Area Boundary	ENE	1680	1.12E-06	2.64E-09
Unrestricted Area Boundary	E	1570	7.10E-07	1.46E-09
Unrestricted Area Boundary	ESE	1460	7.91E-07	1.58E-09
Unrestricted Area Boundary	SE	1460	9.14E-07	2.41E-09
Unrestricted Area Boundary	SSE	1550	1.34E-06	3.23E-09
Unrestricted Area Boundary	S	1570	2.37E-06	4.18E-09
Unrestricted Area Boundary	SSW	1840	4.51E-06	9.26E-09
Unrestricted Area Boundary	SW	2470	1.38E-06	2.63E-09
Unrestricted Area Boundary	WSW	910	2.93E-06	3.86E-09
Unrestricted Area Boundary	W	670	3.63E-06	3.74E-09
Unrestricted Area Boundary	WNW	660	2.49E-06	2.44E-09
Unrestricted Area Boundary	NW	660	2.85E-06	3.67E-09
Unrestricted Area Boundary	NNW	730	3.95E-06	6.59E-09
Liquid Discharge	S	870	N/A	N/A

33

NOTE: For quarterly airborne dose calculations, doses will also be calculated for all locations identified in the most recent land use census, and for any additional points deemed necessary.

Table 7.2 JOINT PERCENTAGE FREQUENCIES OF WIND DIRECTION AND WIND SPEED
FOR DIFFERENT STABILITY CLASSES*
(Page 1 of 7)

Sequoyah Nuclear Plant Meteorological Facility*
Jan. 1, 72 - Dec. 31, 75

Stability Class A
Delta T \leq -1.9 deg. C/100m

	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	>24.5	
N	0.01	0.01	0.01	0.03	0.04	0.04	0.0	0.0	0.0	0.13
NNE	0.0	0.0	0.04	0.19	0.20	0.16	0.01	0.0	0.0	0.60
NE	0.0	0.0	0.08	0.20	0.15	0.13	0.0	0.0	0.0	0.56
ENE	0.0	0.0	0.03	0.03	0.01	0.0	0.0	0.0	0.0	0.07
E	0.0	0.0	0.01	0.0	0.0	0.0	0.0	0.0	0.0	0.01
ESE	0.0	0.0	0.01	0.01	0.0	0.0	0.01	0.0	0.0	0.03
SE	0.0	0.0	0.01	0.02	0.0	0.0	0.0	0.0	0.0	0.03
SSE	0.0	0.0	0.01	0.03	0.02	0.02	0.01	0.0	0.0	0.09
S	0.0	0.0	0.01	0.04	0.06	0.05	0.01	0.0	0.0	0.17
SSW	0.0	0.0	0.01	0.09	0.18	0.16	0.01	0.0	0.0	0.45
SW	0.0	0.0	0.04	0.12	0.10	0.09	0.02	0.0	0.0	0.37
WSW	0.0	0.0	0.02	0.03	0.03	0.02	0.02	0.0	0.0	0.12
W	0.0	0.0	0.01	0.0	0.01	0.02	0.0	0.0	0.0	0.04
WNW	0.0	0.0	0.0	0.0	0.0	0.01	0.01	0.0	0.0	0.02
NW	0.0	0.0	0.01	0.01	0.01	0.05	0.01	0.0	0.0	0.09
NNW	0.0	0.0	0.01	0.0	0.02	0.08	0.01	0.0	0.0	0.12
Sub- total	0.01	0.01	0.31	0.80	0.83	0.83	0.12	0.0	0.0	2.90

958 stability class A occurrences out of total 32723 valid temperature difference readings.

934 valid wind direction/wind speed readings out of total 958 stability class A occurrences.

All columns add calm total 100 percent of net valid readings

* Meteorological Facility located 0.74 miles SW of Sequoyah Nuclear Plant.
Temperature Instruments 33 and 150 feet above ground.
Wind instruments 33 feet above ground.

Table 7.2 JOINT PERCENTAGE FREQUENCIES OF WIND DIRECTION AND WIND SPEED
FOR DIFFERENT STABILITY CLASSES*

(Page 2 of 7)

Sequoyah Nuclear Plant Meteorological Facility*
Jan. 1, 72 - Dec. 31, 75

Stability Class B
-1.9 < $\Delta T \leq -1.7$ deg. C/100m

		Wind Speed (mph)									Total
		Calm	0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	>24.5	
N	0.0	0.0	0.0	0.01	0.01	0.02	0.03	0.0	0.0	0.0	0.07
NNE	0.0	0.0	0.0	0.05	0.23	0.20	0.18	0.01	0.0	0.0	0.67
NE	0.01	0.0	0.0	0.08	0.29	0.09	0.06	0.0	0.0	0.0	0.52
ENE	0.0	0.0	0.0	0.03	0.03	0.01	0.0	0.0	0.0	0.0	0.07
E	0.0	0.0	0.0	0.02	0.01	0.0	0.0	0.0	0.0	0.0	0.03
ESE	0.0	0.0	0.0	0.0	0.01	0.0	0.0	0.0	0.0	0.0	0.01
SE	0.0	0.0	0.0	0.01	0.02	0.0	0.01	0.0	0.0	0.0	0.04
SSE	0.0	0.0	0.0	0.01	0.03	0.0	0.02	0.0	0.0	0.0	0.06
S	0.0	0.0	0.0	0.03	0.03	0.07	0.04	0.01	0.0	0.0	0.18
SSW	0.0	0.0	0.0	0.04	0.09	0.20	0.20	0.03	0.0	0.0	0.56
SW	0.0	0.0	0.0	0.03	0.11	0.14	0.10	0.02	0.0	0.0	0.40
WSW	0.0	0.0	0.0	0.01	0.01	0.03	0.02	0.01	0.01	0.0	0.09
W	0.0	0.0	0.0	0.0	0.0	0.01	0.01	0.0	0.0	0.0	0.02
WNW	0.0	0.0	0.0	0.0	0.01	0.01	0.03	0.0	0.0	0.0	0.05
NW	0.0	0.0	0.0	0.0	0.0	0.01	0.05	0.0	0.0	0.0	0.06
NNW	0.0	0.0	0.0	0.01	0.02	0.02	0.06	0.01	0.0	0.0	0.12
SUBTOTAL	0.01	0.0	0.0	0.33	0.90	0.81	0.81	0.09	0.01	0.0	2.95

969 stability class B occurrences out of total 32723 valid temperature difference readings.

953 valid wind direction/wind speed readings out of total 969 stability class B occurrences.

All columns and calm total 100 percent of net valid readings.

*Meteorological facility located 0.74 miles SW of Sequoyah Nuclear Plant.
Temperature instruments 33 and 150 feet above ground.
Wind instruments 33 feet above ground.

Table 7.2 JOINT PERCENTAGE FREQUENCIES OF WIND DIRECTION AND WIND SPEED
FOR DIFFERENT STABILITY CLASSES*
(Page 3 of 7)

Sequoyah Nuclear Plant Meteorological Facility*
Jan. 1, 72 - Dec. 31, 75

Stability Class C
-1.7 < $\Delta T \leq -1.5$ deg. C/100m

		Wind Speed (mph)									Total
		Calm	0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	>24.5	
N	0.0	0.0	0.0	0.01	0.02	0.02	0.02	0.0	0.0	0.0	0.07
NNE	0.0	0.0	0.0	0.05	0.12	0.11	0.11	0.0	0.0	0.0	0.39
NE	0.0	0.0	0.0	0.05	0.14	0.05	0.03	0.0	0.0	0.0	0.27
ENE	0.0	0.0	0.0	0.03	0.02	0.0	0.0	0.0	0.0	0.0	0.05
E	0.0	0.0	0.0	0.01	0.01	0.0	0.0	0.0	0.0	0.0	0.02
ESE	0.0	0.0	0.0	0.01	0.01	0.0	0.0	0.0	0.0	0.0	0.02
SE	0.0	0.0	0.0	0.01	0.01	0.0	0.0	0.0	0.0	0.0	0.02
SSE	0.0	0.0	0.0	0.01	0.02	0.0	0.02	0.0	0.0	0.0	0.05
S	0.0	0.0	0.0	0.03	0.04	0.06	0.05	0.0	0.0	0.0	0.18
SSW	0.0	0.0	0.0	0.01	0.11	0.14	0.13	0.02	0.0	0.0	0.41
SW	0.0	0.0	0.0	0.03	0.08	0.12	0.07	0.01	0.0	0.0	0.31
WSW	0.0	0.0	0.0	0.01	0.02	0.03	0.02	0.0	0.01	0.0	0.08
W	0.0	0.0	0.0	0.0	0.01	0.0	0.01	0.01	0.0	0.0	0.03
WNW	0.0	0.0	0.0	0.0	0.01	0.01	0.01	0.0	0.0	0.0	0.03
NW	0.0	0.0	0.0	0.0	0.0	0.02	0.03	0.01	0.0	0.0	0.06
NNW	0.0	0.0	0.0	0.0	0.02	0.02	0.05	0.0	0.0	0.0	0.09
SUBTOTAL	0.0	0.0	0.0	0.26	0.64	0.58	0.55	0.05	0.0	0.0	2.08

684 stability class C occurrences out of total 32723 valid temperature difference readings.

672 valid wind direction/wind speed readings out of total 684 stability class C occurrences.

All columns and calm total 100 percent of net valid readings.

*Meteorological facility located 0.74 miles SW of Sequoyah Nuclear Plant.
Temperature instruments 33 and 150 feet above ground.
Wind instruments 33 feet above ground.

Table 7.2 JOINT PERCENTAGE FREQUENCIES OF WIND DIRECTION AND WIND SPEED
FOR DIFFERENT STABILITY CLASSES*
(Page 4 of 7)

Sequoyah Nuclear Plant Meteorological Facility*
Jan. 1, 72 - Dec. 31, 75

Stability Class D
-1.5 < $\Delta T \leq -0.5$ deg. C/100m

		Wind Speed (mph)								
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	>24.5	Total
N	0.003	0.01	0.24	0.22	0.16	0.17	0.0	0.0	0.0	0.80
NNE	0.017	0.06	0.73	1.03	0.84	0.78	0.07	0.0	0.0	3.51
NE	0.006	0.02	0.76	0.88	0.42	0.42	0.05	0.0	0.0	2.55
ENE	0.003	0.01	0.21	0.11	0.03	0.0	0.0	0.0	0.0	0.36
E	0.003	0.01	0.12	0.03	0.02	0.01	0.0	0.0	0.0	0.19
ESE	0.003	0.01	0.06	0.02	0.0	0.0	0.0	0.0	0.0	0.09
SE	0.0	0.0	0.12	0.08	0.0	0.0	0.0	0.0	0.0	0.20
SSE	0.0	0.0	0.15	0.15	0.05	0.06	0.01	0.01	0.0	0.43
S	0.003	0.01	0.31	0.53	0.38	0.25	0.02	0.0	0.0	1.50
SSW	0.003	0.01	0.44	1.25	0.95	0.70	0.07	0.0	0.0	3.42
SW	0.003	0.01	0.47	1.17	1.03	0.52	0.03	0.01	0.0	3.24
WSW	0.0	0.0	0.22	0.34	0.18	0.21	0.07	0.01	0.0	1.03
W	0.003	0.01	0.06	0.08	0.10	0.19	0.02	0.01	0.0	0.47
WNW	0.003	0.01	0.06	0.05	0.11	0.18	0.01	0.0	0.0	0.42
NW	0.0	0.0	0.08	0.08	0.22	0.31	0.03	0.0	0.0	0.72
NNW	0.003	0.01	0.15	0.14	0.25	0.36	0.02	0.0	0.0	0.93
SUBTOTAL	0.05	0.18	4.18	6.16	4.74	4.16	0.40	0.04	0.0	19.86

6567 stability class D occurrences out of total 32723 valid temperature difference readings.

6345 valid wind direction/wind speed readings out of total 6567 stability class D occurrences.

All columns and calm total 100 percent of net valid readings.

*Meteorological facility located 0.74 miles SW of Sequoyah Nuclear Plant.
Temperature instruments 33 and 150 feet above ground.
Wind instruments 33 feet above ground.

Table 7.2 JOINT PERCENTAGE FREQUENCIES OF WIND DIRECTION AND WIND SPEED
FOR DIFFERENT STABILITY CLASSES*
(Page 5 of 7)

Sequoyah Nuclear Plant Meteorological Facility*
Jan. 1, 72 - Dec. 31, 75

Stability Class E
-0.5 < delta T ≤ 1.5 deg. C/100m

	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	>24.5	
N	0.017	0.23	1.26	0.83	0.39	0.27	0.0	0.0	0.0	2.98
NNE	0.023	0.31	2.83	2.46	1.07	0.92	0.03	0.0	0.0	7.62
NE	0.011	0.15	1.03	0.71	0.31	0.18	0.01	0.0	0.0	2.39
ENE	0.009	0.12	0.48	0.16	0.04	0.0	0.0	0.0	0.0	0.80
E	0.010	0.14	0.24	0.05	0.01	0.01	0.0	0.0	0.0	0.45
ESE	0.007	0.09	0.11	0.01	0.01	0.01	0.01	0.0	0.0	0.24
SE	0.007	0.10	0.37	0.06	0.01	0.01	0.0	0.0	0.0	0.55
SSE	0.008	0.11	0.58	0.24	0.13	0.23	0.04	0.02	0.0	1.35
S	0.013	0.17	1.33	1.49	0.91	1.05	0.08	0.0	0.0	5.03
SSW	0.007	0.10	1.67	2.32	1.67	1.45	0.11	0.0	0.0	7.32
SW	0.013	0.17	1.59	2.07	1.30	0.99	0.10	0.0	0.0	6.22
WSW	0.010	0.13	0.87	0.55	0.35	0.40	0.06	0.0	0.0	2.36
W	0.007	0.10	0.42	0.28	0.21	0.22	0.03	0.0	0.0	1.26
WNW	0.010	0.14	0.37	0.22	0.19	0.27	0.02	0.0	0.0	1.21
NW	0.007	0.10	0.50	0.37	0.43	0.38	0.02	0.0	0.0	1.80
NNW	0.011	0.15	0.80	0.68	0.57	0.40	0.01	0.0	0.0	2.61
SUBTOTAL	0.17	2.31	14.45	12.50	7.60	6.79	0.52	0.02	0.0	44.19

14624 stability class E occurrences out of total 32723 valid temperature difference readings.

14146 valid wind direction/wind speed readings out of total 14624 stability class E occurrences.

All columns and calm total 100 percent of net valid readings.

*Meteorological facility located 0.74 miles SW of Sequoyah Nuclear Plant.
Temperature instruments 33 and 150 feet above ground.
Wind instruments 33 feet above ground.

Table 7.2 JOINT PERCENTAGE FREQUENCIES OF WIND DIRECTION AND WIND SPEED
FOR DIFFERENT STABILITY CLASSES*
(Page 6 of 7)

Sequoyah Nuclear Plant Meteorological Facility*
Jan. 1, 72 - Dec. 31, 75

Stability Class F
 $1.5 < \Delta T \leq 4.0$ deg. C/100m

	Calm	Wind Speed (mph)								Total
		0.6- 1.4	1.5- 3.4	3.5- 5.4	5.5- 7.4	7.5- 12.4	12.5- 18.4	18.5- 24.4	>24.5	
N	0.011	0.21	1.37	0.44	0.04	0.0	0.0	0.0	0.0	2.06
NNE	0.018	0.35	3.61	0.84	0.05	0.0	0.0	0.0	0.0	4.85
NE	0.011	0.21	1.15	0.28	0.01	0.0	0.0	0.0	0.0	1.65
ENE	0.008	0.16	0.39	0.03	0.0	0.0	0.0	0.0	0.0	0.58
E	0.010	0.20	0.22	0.0	0.0	0.0	0.0	0.0	0.0	0.42
ESE	0.007	0.13	0.18	0.02	0.0	0.0	0.0	0.0	0.0	0.33
SE	0.007	0.14	0.23	0.02	0.0	0.0	0.0	0.0	0.0	0.39
SSE	0.008	0.15	0.37	0.07	0.03	0.01	0.0	0.0	0.0	0.63
S	0.009	0.17	0.77	0.30	0.10	0.06	0.0	0.0	0.0	1.40
SSW	0.006	0.12	1.13	0.71	0.26	0.11	0.0	0.0	0.0	2.33
SW	0.005	0.10	0.99	0.86	0.27	0.13	0.0	0.0	0.0	2.35
WSW	0.005	0.09	0.46	0.19	0.04	0.01	0.0	0.0	0.0	0.79
W	0.004	0.07	0.20	0.07	0.01	0.0	0.0	0.0	0.0	0.35
WNW	0.005	0.10	0.24	0.07	0.01	0.0	0.0	0.0	0.0	0.42
NW	0.003	0.05	0.29	0.15	0.05	0.01	0.0	0.0	0.0	0.55
NNW	0.005	0.09	0.52	0.34	0.05	0.01	0.0	0.0	0.0	1.01
SUBTOTAL	0.12	2.34	12.12	4.39	0.92	0.34	0.0	0.0	0.0	20.11

6542 stability class F occurrences out of total 32723 valid temperature difference readings.

6461 valid wind direction/wind speed readings out of total 6542 stability class F occurrences.

All columns and calm total 100 percent of net valid readings.

*Meteorological facility located 0.74 miles SW of Sequoyah Nuclear Plant.
Temperature instruments 33 and 150 feet above ground.
Wind instruments 33 feet above ground.

Table 7.2 JOINT PERCENTAGE FREQUENCIES OF WIND DIRECTION AND WIND SPEED
FOR DIFFERENT STABILITY CLASSES*
(Page 7 of 7)

Sequoyah Nuclear Plant Meteorological Facility*
Jan. 1, 72 - Dec. 31, 75

Stability Class G
Delta T > 4.0 deg. C/100m

		Wind Speed (mph)								Total
		0.6- Calm	1.5- 1.4	3.5- 3.4	5.5- 5.4	7.5- 7.4	12.5- 12.4	18.5- 18.4	>24.5	
N	0.003	0.06	0.33	0.09	0.0	0.0	0.0	0.0	0.0	0.48
NNE	0.005	0.10	1.03	0.20	0.0	0.0	0.0	0.0	0.0	1.33
NE	0.005	0.09	0.74	0.12	0.0	0.0	0.0	0.0	0.0	0.95
ENE	0.007	0.13	0.42	0.02	0.0	0.0	0.0	0.0	0.0	0.57
E	0.007	0.14	0.18	0.01	0.0	0.0	0.0	0.0	0.0	0.33
ESE	0.006	0.11	0.08	0.01	0.0	0.0	0.0	0.0	0.0	0.20
SE	0.005	0.09	0.08	0.0	0.0	0.0	0.0	0.0	0.0	0.17
SSE	0.008	0.16	0.21	0.0	0.0	0.0	0.0	0.0	0.0	0.37
S	0.006	0.11	0.39	0.04	0.02	0.0	0.0	0.0	0.0	0.55
SSW	0.003	0.06	0.48	0.32	0.06	0.01	0.0	0.0	0.0	0.89
SW	0.002	0.03	0.44	0.42	0.0	0.0	0.0	0.0	0.0	0.95
WSW	0.001	0.01	0.11	0.07	0.0	0.0	0.0	0.0	0.0	0.19
W	0.002	0.03	0.08	0.02	0.0	0.0	0.0	0.0	0.0	0.13
WNW	0.001	0.01	0.03	0.01	0.0	0.01	0.0	0.0	0.0	0.06
NW	0.001	0.02	0.06	0.03	0.0	0.0	0.0	0.0	0.0	0.11
NNW	0.001	0.02	0.08	0.03	0.0	0.0	0.0	0.0	0.0	0.13
SUBTOTAL	0.06	1.17	4.74	1.39	0.09	0.2	0.0	0.0	0.0	7.41

2379 stability class G occurrences out of total 32723 valid temperature difference readings.

2378 valid wind direction/wind speed readings out of total 2379 stability class G occurrences.

All columns and calm total 100 percent of net valid readings.

*Meteorological facility located 0.74 Miles SW of Sequoyah Nuclear Plant.
Temperature instruments 33 and 150 feet above ground.
Wind instruments 33 feet above ground.

Table 7.3 DOSE FACTORS FOR SUBMERSION IN NOBLE GASES

	Submersion dose mrem/y per $\mu\text{Ci}/\text{m}^3$		Air dose mrad/y per $\mu\text{Ci}/\text{m}^3$	
	DF_{BI}	DF_{SI}	DF_{γ}	DF_{BI}
Kr-83m	7.56E-02	---	1.93E+01	2.88E+02
Kr-85m	1.17E+03	1.46E+03	1.23E+03	1.97E+03
Kr-85	1.61E+01	1.34E+03	1.72E+01	1.95E+03
Kr-87	5.92E+03	9.73E+03	6.17E+03	1.03E+04
Kr-88	1.47E+04	2.37E+03	1.52E+04	2.93E+03
Kr-89	1.66E+04	1.01E+04	1.73E+04	1.06E+04
Kr-90	1.56E+04	7.29E+03	1.63E+04	7.83E+03
Xe-131m	9.15E+01	4.76E+02	1.56E+02	1.11E+03
Xe-133m	2.51E+02	9.94E+02	3.27E+02	1.48E+03
Xe-133	2.94E+02	3.06E+02	3.53E+02	1.05E+03
Xe-135m	3.12E+03	7.11E+02	3.36E+03	7.39E+02
Xe-135	1.81E+03	1.86E+03	1.92E+03	2.46E+03
Xe-137	1.42E+03	1.22E+04	1.51E+03	1.27E+04
Xe-138	8.83E+03	4.13E+03	9.21E+03	4.75E+03
Ar-41	8.84E+03	2.69E+03	9.30E+03	3.28E+03

Reference:
Regulatory Guide 1.109, Table B-1.

Table 7.4 SECTOR ELEMENTS CONSIDERED FOR POPULATION DOSES

Range of Sector Element	Midpoint of Sector Element	
Unrestricted Area boundary - 1 mile	0.8 mile	33
1 - 2 miles	1.5 miles	
2 - 3 miles	2.5 miles	
3 - 4 miles	3.5 miles	
4 - 5 miles	4.5 miles	
5 - 10 miles	7.5 miles	
10 - 20 miles	15 miles	
20 - 30 miles	25 miles	
30 - 40 miles	35 miles	
40 - 50 miles	45 miles	

Table 7.5 POPULATION WITHIN EACH SECTOR ELEMENT

		Sector Midpoint (miles)								
	0.8	1.5	2.5	3.5	4.5	7.5	15	25	35	45
N	20	41	213	129	66	1784	5453	3470	2610	11145
NNE	0	30	123	182	62	600	0628	4910	8250	10625
NE	0	0	67	67	94	581	2884	6998	7047	18080
ENE	0	11	24	222	300	773	4707	5747	29477	18679
E	0	70	11	191	137	918	7440	6808	5072	4129
ESE	0	118	113	194	137	1849	46521	5044	1896	3624
SE	0	179	322	168	205	1507	6005	5461	15641	3417
SSE	0	125	370	750	601	2347	13242	8596	34279	1648
S	0	67	143	229	811	3930	28008	26690	19642	11622
SSW	0	82	140	400	170	8927	96966	55597	21349	11978
SW	0	10	306	634	194	9787	94225	23455	11641	11109
WSW	20	190	642	1124	1669	19089	28405	4106	15081	9548
W	10	20	233	657	657	5225	1580	6350	5699	7707
WN\W	10	30	365	598	598	2622	6540	4920	6699	2450
NW	50	80	292	569	336	2696	1410	1750	1217	15856
NNW	10	263	80	75	213	1610	471	3130	2835	5719

Table 7.6 INHALATION DOSE FACTORS
(mrem/pCi inhaled)

(Page 1 of 8)

ADULT

	bone	liver	t body	thyroid	kidney	lung	gi-III
H-3	1.58E-07	1.58E-07	1.58E-07	1.58E-07	1.58E-07	1.58E-07	1.58E-07
C-14	2.27E-06	4.26E-07	4.26E-07	4.26E-07	4.26E-07	4.26E-07	4.26E-07
Na-24	1.28E-06	1.28E-06	1.28E-06	1.28E-06	1.28E-06	1.28E-06	1.28E-06
P-32	1.65E-04	9.64E-06	6.26E-06	0.00E+00	0.00E+00	0.00E+00	1.08E-05
Cr-51	0.00E+00	0.00E+00	1.25E-08	7.44E-09	2.85E-09	1.80E-06	4.15E-07
Mn-54	0.00E+00	4.95E-06	7.87E-07	0.00E+00	1.23E-06	1.75E-04	9.67E-06
Mn-56	0.00E+00	1.55E-10	2.29E-11	0.00E+00	1.63E-10	1.18E-06	2.53E-06
Fe-55	3.07E-06	2.12E-06	4.93E-07	0.00E+00	0.00E+00	9.01E-06	7.54E-07
Fe-59	1.47E-06	3.47E-06	1.32E-06	0.00E+00	0.00E+00	1.27E-04	2.35E-05
Co-57	0.00E+00	8.65E-08	8.39E-08	0.00E+00	0.00E+00	4.62E-05	3.93E-06
Co-58	0.00E+00	1.98E-07	2.59E-07	0.00E+00	0.00E+00	1.16E-04	1.33E-05
Co-60	0.00E+00	1.44E-06	1.85E-06	0.00E+00	0.00E+00	7.46E-04	3.56E-05
Ni-63	5.40E-05	3.93E-06	1.81E-06	0.00E+00	0.00E+00	2.23E-05	1.67E-06
Ni-65	1.92E-10	2.62E-11	1.14E-11	0.00E+00	0.00E+00	7.00E-07	1.54E-06
Cu-64	0.00E+00	1.83E-10	7.69E-11	0.00E+00	5.78E-10	8.48E-07	6.12E-06
Zn-65	4.05E-06	1.29E-05	5.82E-06	0.00E+00	8.62E-06	1.08E-04	6.68E-06
Zn-69	4.23E-12	8.14E-12	5.65E-13	0.00E+00	5.27E-12	1.15E-07	2.04E-09
Zn-69m	1.02E-09	2.45E-09	2.24E-10	0.00E+00	1.48E-09	2.38E-06	1.71E-05
Br-82	0.00E+00	0.00E+00	1.69E-06	0.00E+00	0.00E+00	0.00E+00	1.30E-06
Br-83	0.00E+00	0.00E+00	3.01E-08	0.00E+00	0.00E+00	0.00E+00	2.90E-08
Br-84	0.00E+00	0.00E+00	3.91E-08	0.00E+00	0.00E+00	0.00E+00	2.05E-13
Br-85	0.00E+00	0.00E+00	1.60E-09	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Rb-86	0.00E+00	1.69E-05	7.37E-06	0.00E+00	0.00E+00	0.00E+00	2.08E-06
Rb-88	0.00E+00	4.84E-08	2.41E-08	0.00E+00	0.00E+00	0.00E+00	4.18E-19
Rb-89	0.00E+00	3.20E-08	2.12E-08	0.00E+00	0.00E+00	0.00E+00	1.16E-21
Sr-89	3.80E-05	0.00E+00	1.09E-06	0.00E+00	0.00E+00	1.75E-04	4.37E-05
Sr-90	1.24E-02	0.00E+00	7.62E-04	0.00E+00	0.00E+00	1.20E-03	9.02E-05
Sr-91	7.74E-09	0.00E+00	3.13E-10	0.00E+00	0.00E+00	4.56E-06	2.39E-05
Sr-92	8.43E-10	0.00E+00	3.64E-11	0.00E+00	0.00E+00	2.06E-06	5.38E-06
Y-90	2.61E-07	0.00E+00	7.01E-09	0.00E+00	0.00E+00	2.12E-05	6.32E-05
Y-91m	3.26E-11	0.00E+00	1.27E-12	0.00E+00	0.00E+00	2.40E-07	1.66E-10
Y-91	5.78E-05	0.00E+00	1.55E-06	0.00E+00	0.00E+00	2.13E-04	4.81E-05
Y-92	1.29E-09	0.00E+00	3.77E-11	0.00E+00	0.00E+00	1.96E-06	9.19E-06
Y-93	1.18E-08	0.00E+00	3.26E-10	0.00E+00	0.00E+00	6.06E-06	5.27E-05
Zr-95	1.34E-05	4.30E-06	2.91E-06	0.00E+00	6.77E-06	2.21E-04	1.88E-05
Zr-97	1.21E-08	2.45E-09	1.13E-09	0.00E+00	3.71E-09	9.84E-06	6.54E-05
Nb-95	1.76E-06	9.77E-07	5.26E-07	0.00E+00	9.67E-07	6.31E-05	1.30E-05
Nb-97	2.78E-11	7.03E-12	2.56E-12	0.00E+00	8.18E-12	3.00E-07	3.02E-08
Mo-99	0.00E+00	1.51E-08	2.87E-09	0.00E+00	3.64E-08	1.14E-05	3.10E-05
Tc-99m	1.29E-13	3.64E-13	4.63E-12	0.00E+00	5.52E-12	9.55E-08	5.20E-07
Tc-101	5.22E-15	7.52E-15	7.38E-14	0.00E+00	1.35E-13	4.99E-08	1.36E-21
Ru-103	1.91E-07	0.00E+00	8.23E-08	0.00E+00	7.29E-07	6.31E-05	1.38E-05
Ru-105	9.88E-11	0.00E+00	3.89E-11	0.00E+00	1.27E-10	1.37E-06	6.02E-06
Ru-106	8.64E-06	0.00E+00	1.09E-06	0.00E+00	1.67E-05	1.17E-03	1.14E-04
Ag-110m	1.35E-06	1.25E-06	7.43E-07	0.00E+00	2.46E-06	5.79E-04	3.78E-05

Table 7.6 INHALATION DOSE FACTORS
(mrem/pCi inhaled)
(Page 2 of 8)

	ADULT						
	bone	liver	t body	thyroid	kidney	lung	gi-lli
Sb-124	3.90E-06	7.36E-08	1.55E-06	9.44E-09	0.00E+00	3.10E-04	5.08E-05
Sb-125	6.67E-06	7.44E-08	1.58E-06	6.75E-09	0.00E+00	2.18E-04	1.26E-05
Sn-125	1.16E-06	3.12E-08	7.03E-08	2.59E-08	0.00E+00	7.37E-05	6.81E-05
Te-125m	4.27E-07	1.98E-07	5.84E-08	1.31E-07	1.55E-06	3.92E-05	8.83E-06
Te-127m	1.58E-06	7.21E-07	1.96E-07	4.11E-07	5.72E-06	1.20E-04	1.87E-05
Te-127	1.75E-10	8.03E-11	3.87E-11	1.32E-10	6.37E-10	8.14E-07	7.17E-06
Te-129m	1.22E-06	5.84E-07	1.98E-07	4.30E-07	4.57E-06	1.45E-04	4.79E-05
Te-129	6.22E-12	2.99E-12	1.55E-12	4.87E-12	2.34E-11	2.42E-07	1.96E-08
Te-131m	8.74E-09	5.45E-09	3.63E-09	6.88E-09	3.86E-08	1.82E-05	6.95E-05
Te-131	1.39E-12	7.44E-13	4.49E-13	1.17E-12	5.46E-12	1.74E-07	2.30E-09
Te-132	3.25E-08	2.69E-08	2.02E-08	2.37E-08	1.82E-07	3.60E-05	6.37E-05
I-130	5.72E-07	1.68E-06	6.60E-07	1.42E-04	2.61E-06	0.00E+00	9.61E-07
I-131	3.15E-06	4.47E-06	2.56E-06	1.49E-03	7.66E-06	0.00E+00	7.85E-07
I-132	1.45E-07	4.07E-07	1.45E-07	1.43E-05	6.48E-07	0.00E+00	5.08E-08
I-133	1.08E-06	1.85E-06	5.65E-07	2.69E-04	3.23E-06	0.00E+00	1.11E-06
I-134	8.05E-08	2.16E-07	7.69E-08	3.73E-06	3.44E-07	0.00E+00	1.26E-10
I-135	3.35E-07	8.73E-07	3.21E-07	5.60E-05	1.39E-06	0.00E+00	6.56E-07
Cs-134	4.66E-05	1.06E-04	9.10E-05	0.00E+00	3.59E-05	1.22E-05	1.30E-06
Cs-136	4.88E-06	1.83E-05	1.38E-05	0.00E+00	1.07E-05	1.50E-06	1.46E-06
Cs-137	5.98E-05	7.76E-05	5.35E-05	0.00E+00	2.78E-05	9.40E-06	1.05E-06
Cs-138	4.14E-08	7.76E-08	4.05E-08	0.00E+00	6.00E-08	6.07E-09	2.33E-13
Ba-139	1.17E-10	8.32E-14	3.42E-12	0.00E+00	7.78E-14	4.70E-07	1.12E-07
Ba-140	4.88E-06	6.13E-09	3.21E-07	0.00E+00	2.09E-09	1.59E-04	2.73E-05
Ba-141	1.25E-11	9.41E-15	4.20E-13	0.00E+00	8.75E-15	2.42E-07	1.45E-17
Ba-142	3.29E-12	3.38E-15	2.07E-13	0.00E+00	2.86E-15	1.49E-07	1.96E-26
La-140	4.30E-08	2.17E-08	5.73E-09	0.00E+00	0.00E+00	1.70E-05	5.73E-05
La-142	8.54E-11	3.88E-11	9.65E-12	0.00E+00	0.00E+00	7.91E-07	2.64E-07
Ce-141	2.49E-06	1.69E-06	1.91E-07	0.00E+00	7.83E-07	4.52E-05	1.50E-05
Ce-143	2.33E-08	1.72E-08	1.91E-09	0.00E+00	7.60E-09	9.97E-06	2.83E-05
Ce-144	4.29E-04	1.79E-04	2.30E-05	0.00E+00	1.06E-04	9.72E-04	1.02E-04
Pr-143	1.17E-06	4.69E-07	5.80E-08	0.00E+00	2.70E-07	3.51E-05	2.50E-05
Pr-144	3.76E-12	1.56E-12	1.91E-13	0.00E+00	8.81E-13	1.27E-07	2.69E-18
Nd-147	6.59E-07	7.62E-07	4.56E-08	0.00E+00	4.45E-07	2.76E-05	2.16E-05
W-187	1.06E-09	8.85E-10	3.10E-10	0.00E+00	0.00E+00	3.63E-06	1.94E-05
Np-239	2.87E-08	2.82E-09	1.55E-09	0.00E+00	8.75E-09	4.70E-06	1.49E-05

NOTE: The tritium dose factor for bone is assumed to be equal to the total body dose factor.

Reference:

Regulatory Guide 1.109, Table E-7.

Dose Factors for Co-57, Zn-69m, Br-82, Nb-97, Sn-125, Sb-124 and Sb-125 are from NUREG-0172 Age Specific Radiation Dose Commitment Factors for a One Year Chronic Intake, November 1977, Table 8.

Table 7.6 INHALATION DOSE FACTORS
(mrem/pCi inhaled)
(Page 3 of 8)

	TEEN						
	bone	liver	t body	thyroid	kidney	lung	gi-III
H-3	1.59E-07	1.59E-07	1.59E-07	1.59E-07	1.59E-07	1.59E-07	1.59E-07
C-14	3.25E-06	6.09E-07	6.09E-07	6.09E-07	6.09E-07	6.09E-07	6.09E-07
Na-24	1.72E-06	1.72E-06	1.72E-06	1.72E-06	1.72E-06	1.72E-06	1.72E-06
P-32	2.36E-04	1.37E-05	8.95E-06	0.00E+00	0.00E+00	0.00E+00	1.16E-05
Cr-51	0.00E+00	0.00E+00	1.69E-08	9.37E-09	3.84E-09	2.62E-06	3.75E-07
Mn-54	0.00E+00	6.39E-06	1.05E-06	0.00E+00	1.59E-06	2.48E-04	8.35E-06
Mn-56	0.00E+00	2.12E-10	3.15E-11	0.00E+00	2.24E-10	1.90E-06	7.18E-06
Fe-55	4.18E-06	2.98E-06	6.93E-07	0.00E+00	0.00E+00	1.55E-05	7.99E-07
Fe-59	1.99E-06	4.62E-06	1.79E-06	0.00E+00	0.00E+00	1.91E-04	2.23E-05
Co-57	0.00E+00	1.18E-07	1.15E-07	0.00E+00	0.00E+00	7.33E-05	3.93E-06
Co-58	0.00E+00	2.59E-07	3.47E-07	0.00E+00	0.00E+00	1.68E-04	1.19E-05
Co-60	0.00E+00	1.89E-06	2.48E-06	0.00E+00	0.00E+00	1.09E-03	3.24E-05
Ni-63	7.25E-05	5.43E-06	2.47E-06	0.00E+00	0.00E+00	3.84E-05	1.77E-06
Ni-65	2.73E-10	3.66E-11	1.59E-11	0.00E+00	0.00E+00	1.17E-06	4.59E-06
Cu-64	0.00E+00	2.54E-10	1.06E-10	0.00E+00	8.01E-10	1.39E-06	7.68E-06
Zn-65	4.82E-06	1.67E-05	7.80E-06	0.00E+00	1.08E-05	1.55E-04	5.83E-06
Zn-69	6.04E-12	1.15E-11	8.07E-13	0.00E+00	7.53E-12	1.98E-07	3.56E-08
Zn-69m	1.44E-09	3.39E-09	3.11E-10	0.00E+00	2.06E-09	3.92E-06	2.14E-05
Br-82	0.00E+00	0.00E+00	2.28E-06	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-83	0.00E+00	0.00E+00	4.30E-08	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-84	0.00E+00	0.00E+00	5.41E-08	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-85	0.00E+00	0.00E+00	2.29E-09	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Rb-86	0.00E+00	2.38E-05	1.05E-05	0.00E+00	0.00E+00	0.00E+00	2.21E-06
Rb-88	0.00E+00	6.82E-08	3.40E-08	0.00E+00	0.00E+00	0.00E+00	3.65E-15
Rb-89	0.00E+00	4.40E-08	2.91E-08	0.00E+00	0.00E+00	0.00E+00	4.22E-17
Sr-89	5.43E-05	0.00E+00	1.56E-06	0.00E+00	0.00E+00	3.02E-04	4.64E-05
Sr-90	1.35E-02	0.00E+00	8.35E-04	0.00E+00	0.00E+00	2.06E-03	9.56E-05
Sr-91	1.10E-08	0.00E+00	4.39E-10	0.00E+00	0.00E+00	7.59E-06	3.24E-05
Sr-92	1.19E-09	0.00E+00	5.08E-11	0.00E+00	0.00E+00	3.43E-06	1.49E-05
Y-90	3.73E-07	0.00E+00	1.00E-08	0.00E+00	0.00E+00	3.66E-05	6.99E-05
Y-91m	4.63E-11	0.00E+00	1.77E-12	0.00E+00	0.00E+00	4.00E-07	3.77E-09
Y-91	8.26E-05	0.00E+00	2.21E-06	0.00E+00	0.00E+00	3.67E-04	5.11E-05
Y-92	1.84E-09	0.00E+00	5.36E-11	0.00E+00	0.00E+00	3.35E-06	2.06E-05
Y-93	1.69E-08	0.00E+00	4.65E-10	0.00E+00	0.00E+00	1.04E-05	7.24E-05
Zr-95	1.82E-05	5.73E-06	3.94E-06	0.00E+00	8.42E-06	3.36E-04	1.86E-05
Zr-97	1.72E-08	3.40E-09	1.57E-09	0.00E+00	5.15E-09	1.62E-05	7.88E-05
Nb-95	2.32E-06	1.29E-06	7.08E-07	0.00E+00	1.25E-06	9.39E-05	1.21E-05
Nb-97	3.92E-11	9.72E-12	3.55E-12	0.00E+00	1.14E-11	4.91E-07	2.71E-07
Mo-99	0.00E+00	2.11E-08	4.03E-09	0.00E+00	5.14E-08	1.92E-05	3.36E-05
Tc-99m	1.73E-13	4.83E-13	6.24E-12	0.00E+00	7.20E-12	1.44E-07	7.66E-07
Tc-101	7.40E-15	1.05E-14	1.03E-13	0.00E+00	1.90E-13	8.34E-08	1.09E-16
Ru-103	2.63E-07	0.00E+00	7.70E-07	0.00E+00	9.29E-07	9.79E-05	1.36E-05
Ru-105	1.40E-10	0.00E+00	5.42E-11	0.00E+00	1.76E-10	2.27E-06	1.13E-05
Ru-106	1.23E-05	0.00E+00	1.55E-06	0.00E+00	2.38E-05	2.01E-03	1.20E-04
Ag-110m	1.73E-06	1.64E-06	9.99E-07	0.00E+00	3.13E-06	8.44E-04	3.41E-05

Table 7.6 INHALATION DOSE FACTORS
(mrem/pCi inhaled)
(Page 4 of 8)

	TEEN						
	bone	liver	t body	thyroid	kidney	lung	gi-ili
Sb-124	5.38E-06	9.92E-08	2.10E-06	1.22E-08	0.00E+00	4.81E-04	4.98E-05
Sb-125	9.23E-06	1.01E-07	2.15E-06	8.80E-09	0.00E+00	3.42E-04	1.24E-05
Sn-125	1.66E-06	4.42E-08	9.99E-08	3.45E-08	0.00E+00	1.26E-04	7.29E-05
Te-125m	6.10E-07	2.80E-07	8.34E-08	1.75E-07	0.00E+00	6.70E-05	9.38E-06
Te-127m	2.25E-06	1.02E-06	2.73E-07	5.48E-07	8.17E-06	2.07E-04	1.99E-05
Te-127	2.51E-10	1.14E-10	5.52E-11	1.77E-10	9.10E-10	1.40E-06	1.01E-05
Te-129m	1.74E-06	8.23E-07	2.81E-07	5.72E-07	6.49E-06	2.47E-04	5.06E-05
Te-129	8.87E-12	4.22E-12	2.20E-12	6.48E-12	3.32E-11	4.12E-07	2.02E-07
Te-131m	1.23E-08	7.51E-09	5.03E-09	9.06E-09	5.49E-08	2.97E-05	7.76E-05
Te-131	1.97E-12	1.04E-12	6.30E-13	1.55E-12	7.72E-12	2.92E-07	1.89E-09
Te-132	4.50E-08	3.63E-08	2.74E-08	3.07E-08	2.44E-07	5.61E-05	5.79E-05
I-130	7.80E-07	2.24E-06	8.96E-07	1.86E-04	3.44E-06	0.00E+00	1.14E-06
I-131	4.43E-06	6.14E-06	3.30E-06	1.83E-03	1.05E-05	0.00E+00	8.11E-07
I-132	1.99E-07	5.47E-07	1.97E-07	1.89E-05	8.65E-07	0.00E+00	1.59E-07
I-133	1.52E-06	2.56E-06	7.78E-07	3.65E-04	4.49E-06	0.00E+00	1.29E-06
I-134	1.11E-07	2.90E-07	1.05E-07	4.94E-06	4.58E-07	0.00E+00	2.55E-09
I-135	4.62E-07	1.18E-06	4.36E-07	7.76E-05	1.86E-06	0.00E+00	8.69E-07
Cs-134	6.28E-05	1.41E-04	6.86E-05	0.00E+00	4.69E-05	1.83E-05	1.22E-06
Cs-136	6.44E-06	2.42E-05	1.71E-05	0.00E+00	1.38E-05	2.22E-06	1.36E-06
Cs-137	8.38E-05	1.06E-04	3.89E-05	0.00E+00	3.80E-05	1.51E-05	1.06E-06
Cs-138	5.82E-08	1.07E-07	5.58E-08	0.00E+00	8.28E-08	9.84E-09	3.38E-11
Ba-139	1.67E-10	1.18E-13	4.87E-12	0.00E+00	1.11E-13	8.08E-07	8.06E-07
Ba-140	6.84E-06	8.38E-09	4.40E-07	0.00E+00	2.85E-09	2.54E-04	2.86E-05
Ba-141	1.78E-11	1.32E-14	5.93E-13	0.00E+00	1.23E-14	4.11E-07	9.33E-14
Ba-142	4.62E-12	4.63E-15	2.84E-13	0.00E+00	3.92E-15	2.39E-07	5.99E-20
La-140	5.99E-08	2.95E-08	7.82E-09	0.00E+00	0.00E+00	2.68E-05	6.09E-05
La-142	1.20E-10	5.31E-11	1.32E-11	0.00E+00	0.00E+00	1.27E-06	1.50E-06
Ce-141	3.55E-06	2.37E-06	2.71E-07	0.00E+00	1.11E-06	7.67E-05	1.58E-05
Ce-143	3.32E-08	2.42E-08	2.70E-09	0.00E+00	1.08E-08	1.63E-05	3.19E-05
Ce-144	6.11E-04	2.53E-04	3.28E-05	0.00E+00	1.51E-04	1.67E-03	1.08E-04
Pr-143	1.67E-06	6.64E-07	8.28E-08	0.00E+00	3.86E-07	6.04E-05	2.67E-05
Pr-144	5.37E-12	2.20E-12	2.72E-13	0.00E+00	1.26E-12	2.19E-07	2.94E-14
Nd-147	9.83E-07	1.07E-06	6.41E-08	0.00E+00	6.28E-07	4.65E-05	2.28E-05
W-187	1.50E-09	1.22E-09	4.29E-10	0.00E+00	0.00E+00	5.92E-06	2.21E-05
Np-239	4.23E-08	3.99E-09	2.21E-09	0.00E+00	1.25E-08	8.11E-06	1.65E-05

NOTE: The tritium dose factor for bone is assumed to be equal to the total body dose factor.

Reference:

Regulatory Guide 1.109, Table E-8.

Dose Factors for Co-57, Zn-69m, Br-82, Nb-97, Sn-125, Sb-124 and Sb-125 are from NUREG-0172 Age Specific Radiation Dose Commitment Factors for a One Year Chronic Intake, November 1977, Table 8.

Table 7.6 INHALATION DOSE FACTORS
(mrem/pCi inhaled)
(Page 5 of 8)

	CHILD						
	bone	liver	t body	thyroid	kidney	lung	gi-ili
H-3	3.04E-07	3.04E-07	3.04E-07	3.04E-07	3.04E-07	3.04E-07	3.04E-07
C-14	9.70E-06	1.82E-06	1.82E-06	1.82E-06	1.82E-06	1.82E-06	1.82E-06
Na-24	4.35E-06	4.35E-06	4.35E-06	4.35E-06	4.35E-06	4.35E-06	4.35E-06
P-32	7.04E-04	3.09E-05	2.67E-05	0.00E+00	0.00E+00	0.00E+00	1.14E-05
Cr-51	0.00E+00	0.00E+00	4.17E-08	2.31E-08	6.57E-09	4.59E-06	2.93E-07
Mn-54	0.00E+00	1.16E-05	2.57E-06	0.00E+00	2.71E-06	4.26E-04	6.19E-06
Mn-56	0.00E+00	4.48E-10	8.43E-11	0.00E+00	4.52E-10	3.55E-06	3.33E-05
Fe-55	1.28E-05	6.80E-06	2.10E-06	0.00E+00	0.00E+00	3.00E-05	7.75E-07
Fe-59	5.59E-06	9.04E-06	4.51E-06	0.00E+00	0.00E+00	3.43E-04	1.91E-05
Co-57	0.00E+00	2.44E-07	2.88E-07	0.00E+00	0.00E+00	1.37E-04	3.58E-06
Co-58	0.00E+00	4.79E-07	8.55E-07	0.00E+00	0.00E+00	2.99E-04	9.29E-06
Co-60	0.00E+00	3.55E-06	6.12E-06	0.00E+00	0.00E+00	1.91E-03	2.60E-05
Ni-63	2.22E-04	1.25E-05	7.56E-06	0.00E+00	0.00E+00	7.43E-05	1.71E-06
Ni-65	8.08E-10	7.99E-11	4.44E-11	0.00E+00	0.00E+00	2.21E-06	2.27E-05
Cu-64	0.00E+00	5.39E-10	2.90E-10	0.00E+00	1.63E-09	2.59E-06	9.92E-06
Zn-65	1.15E-05	3.06E-05	1.90E-05	0.00E+00	1.93E-05	2.69E-04	4.41E-06
Zn-69	1.81E-11	2.61E-11	2.41E-12	0.00E+00	1.58E-11	3.84E-07	2.75E-06
Zn-69m	4.26E-09	7.28E-09	8.50E-10	0.00E+00	4.22E-09	7.36E-06	2.71E-05
Br-82	0.00E+00	0.00E+00	5.66E-06	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-83	0.00E+00	0.00E+00	1.28E-07	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-84	0.00E+00	0.00E+00	1.48E-07	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-85	0.00E+00	0.00E+00	6.84E-09	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Rb-86	0.00E+00	5.36E-05	3.09E-05	0.00E+00	0.00E+00	0.00E+00	2.16E-06
Rb-88	0.00E+00	1.52E-07	9.90E-08	0.00E+00	0.00E+00	0.00E+00	4.66E-09
Rb-89	0.00E+00	9.33E-08	7.83E-08	0.00E+00	0.00E+00	0.00E+00	5.11E-10
Sr-89	1.62E-04	0.00E+00	4.66E-06	0.00E+00	0.00E+00	5.83E-04	4.52E-05
Sr-90	2.73E-02	0.00E+00	1.74E-03	0.00E+00	0.00E+00	3.99E-03	9.28E-05
Sr-91	3.28E-08	0.00E+00	1.24E-09	0.00E+00	0.00E+00	1.44E-05	4.70E-05
Sr-92	3.54E-09	0.00E+00	1.42E-10	0.00E+00	0.00E+00	6.49E-06	6.55E-05
Y-90	1.11E-06	0.00E+00	2.99E-08	0.00E+00	0.00E+00	7.07E-05	7.24E-05
Y-91m	1.37E-10	0.00E+00	4.98E-12	0.00E+00	0.00E+00	7.60E-07	4.64E-07
Y-91	2.47E-04	0.00E+00	6.59E-06	0.00E+00	0.00E+00	7.10E-04	4.97E-05
Y-92	5.50E-09	0.00E+00	1.57E-10	0.00E+00	0.00E+00	6.46E-06	6.46E-05
Y-93	5.04E-08	0.00E+00	1.38E-09	0.00E+00	0.00E+00	2.01E-05	1.05E-04
Zr-95	5.13E-05	1.13E-05	1.00E-05	0.00E+00	1.61E-05	6.03E-04	1.65E-05
Zr-97	5.07E-08	7.34E-09	4.32E-09	0.00E+00	1.05E-08	3.06E-05	9.49E-05
Nb-95	6.35E-06	2.48E-06	1.77E-06	0.00E+00	2.33E-06	1.66E-04	1.00E-05
Nb-97	1.16E-10	2.08E-11	9.74E-12	0.00E+00	2.31E-11	9.23E-07	7.52E-06
Mo-99	0.00E+00	4.66E-08	1.15E-08	0.00E+00	1.06E-07	3.66E-05	3.42E-05
Tc-99m	4.81E-13	9.41E-13	1.56E-11	0.00E+00	1.37E-11	2.57E-07	1.30E-06
Tc-101	2.19E-14	2.30E-14	2.91E-13	0.00E+00	3.92E-13	1.58E-07	4.41E-09
Ru-103	7.55E-07	0.00E+00	2.90E-07	0.00E+00	1.90E-06	1.79E-04	1.21E-05
Ru-105	4.13E-10	0.00E+00	1.50E-10	0.00E+00	3.63E-10	4.30E-06	2.69E-05
Ru-106	3.68E-05	0.00E+00	4.57E-06	0.00E+00	4.97E-05	3.87E-03	1.16E-04
Ag-110m	4.56E-06	3.08E-06	2.47E-06	0.00E+00	5.74E-06	1.48E-03	2.71E-05

Table 7.6 INHALATION DOSE FACTORS
(mrem/pCi inhaled)
(Page 6 of 8)

	CHILD						
	bone	liver	1 body	thyroid	kidney	lung	gi-ili
Sb-124	1.55E-05	2.00E-07	5.41E-06	3.41E-08	0.00E+00	8.76E-04	4.43E-05
Sb-125	2.66E-05	2.05E-07	5.59E-06	2.46E-08	0.00E+00	6.27E-04	1.09E-05
Sn-125	4.95E-06	9.94E-08	2.95E-07	1.03E-07	0.00E+00	2.43E-04	7.17E-05
Te-125m	1.82E-06	6.29E-07	2.47E-07	5.20E-07	0.00E+00	1.29E-04	9.13E-06
Te-127m	6.72E-06	2.31E-06	8.16E-07	1.64E-06	1.72E-05	4.00E-04	1.93E-05
Te-127	7.49E-10	2.57E-10	1.65E-10	5.30E-10	1.91E-09	2.71E-06	1.52E-05
Te-129m	5.19E-06	1.85E-06	8.22E-07	1.71E-06	1.36E-05	4.76E-04	4.91E-05
Te-129	2.64E-11	9.45E-12	6.44E-12	1.93E-11	6.94E-11	7.93E-07	6.89E-06
Te-131m	3.63E-08	1.60E-08	1.37E-08	2.64E-08	1.08E-07	5.56E-05	8.32E-05
Te-131	5.87E-12	2.28E-12	1.78E-12	4.59E-12	1.59E-11	5.55E-07	3.60E-07
Te-132	1.30E-07	7.36E-08	7.12E-08	8.58E-08	4.79E-07	1.02E-04	3.72E-05
I-130	2.21E-06	4.43E-06	2.28E-06	4.99E-04	6.61E-06	0.00E+00	1.38E-06
I-131	1.30E-05	1.30E-05	7.37E-06	4.39E-03	2.13E-05	0.00E+00	7.68E-07
I-132	5.72E-07	1.10E-06	5.07E-07	5.23E-05	1.69E-06	0.00E+00	8.65E-07
I-133	4.48E-06	5.49E-06	2.08E-06	1.04E-03	9.13E-06	0.00E+00	1.48E-06
I-134	3.17E-07	5.84E-07	2.69E-07	1.37E-05	8.92E-07	0.00E+00	2.58E-07
I-135	1.33E-06	2.36E-06	1.12E-06	2.14E-04	3.62E-06	0.00E+00	1.20E-06
Cs-134	1.76E-04	2.74E-04	6.07E-05	0.00E+00	8.93E-05	3.27E-05	1.04E-06
Cs-136	1.76E-05	4.62E-05	3.14E-05	0.00E+00	2.58E-05	3.93E-06	1.13E-06
Cs-137	2.45E-04	2.23E-04	3.47E-05	0.00E+00	7.63E-05	2.81E-05	9.78E-07
Cs-138	1.71E-07	2.27E-07	1.50E-07	0.00E+00	1.68E-07	1.84E-08	7.29E-08
Ba-139	4.98E-10	2.66E-13	1.45E-11	0.00E+00	2.33E-13	1.56E-06	1.56E-05
Ba-140	2.00E-05	1.75E-08	1.17E-06	0.00E+00	5.71E-09	4.71E-04	2.75E-05
Ba-141	5.29E-11	2.95E-14	1.72E-12	0.00E+00	2.56E-14	7.89E-07	7.44E-08
Ba-142	1.35E-11	9.73E-15	7.54E-13	0.00E+00	7.87E-15	4.44E-07	7.41E-10
La-140	1.74E-07	6.08E-08	2.04E-08	0.00E+00	0.00E+00	4.94E-05	6.10E-05
La-142	3.50E-10	1.11E-10	3.49E-11	0.00E+00	0.00E+00	2.35E-06	2.05E-05
Ce-141	1.06E-05	5.28E-06	7.83E-07	0.00E+00	2.31E-06	1.47E-04	1.53E-05
Ce-143	9.89E-08	5.37E-08	7.77E-09	0.00E+00	2.26E-08	3.12E-05	3.44E-05
Ce-144	1.83E-03	5.72E-04	9.77E-05	0.00E+00	3.17E-04	3.23E-03	1.05E-04
Pr-143	4.99E-06	1.50E-06	2.47E-07	0.00E+00	8.11E-07	1.17E-04	2.63E-05
Pr-144	1.61E-11	4.99E-12	8.10E-13	0.00E+00	2.64E-12	4.23E-07	5.32E-08
Nd-147	2.92E-06	2.36E-06	1.84E-07	0.00E+00	1.30E-06	8.87E-05	2.22E-05
W-187	4.41E-09	2.61E-09	1.17E-09	0.00E+00	0.00E+00	1.11E-05	2.46E-05
Np-239	1.26E-07	9.04E-09	6.35E-09	0.00E+00	2.63E-08	1.57E-05	1.73E-05

NOTE: The tritium dose factor for bone is assumed to be equal to the total body dose factor.

Reference:

Regulatory Guide 1.109, Table E-9.

Dose Factors for Co-57, Zn-69m, Br-82, Nb-97, Sn-125, Sb-124 and Sb-125 are from NUREG-0172 Age Specific Radiation Dose Commitment Factors for a One Year Chronic Intake, November 1977, Table 8.

Table 7.6 INHALATION DOSE FACTORS
(mrem/pCi inhaled)

(Page 7 of 8)

	INFANT						
	bone	liver	t body	thyroid	kidney	lung	gi-iii
H-3	4.62E-07	4.62E-07	4.62E-07	4.62E-07	4.62E-07	4.62E-07	4.62E-07
C-14	1.89E-05	3.79E-06	3.79E-06	3.79E-06	3.79E-06	3.79E-06	3.79E-06
Na-24	7.54E-06	7.54E-06	7.54E-06	7.54E-06	7.54E-06	7.54E-06	7.54E-06
P-32	1.45E-03	8.03E+05	5.53E-05	0.00E+00	0.00E+00	0.00E+00	1.15E-05
Cr-51	0.00E+00	0.00E+00	6.39E-08	4.11E-08	9.45E-09	9.17E-06	2.55E-07
Mn-54	0.00E+00	1.81E-05	3.56E-06	0.00E+00	3.56E-06	7.14E-04	5.04E-06
Mn-56	0.00E+00	1.10E-09	1.58E-10	0.00E+00	7.86E-10	8.95E-06	5.12E-05
Fe-55	1.41E-05	8.39E-06	2.38E-06	0.00E+00	0.00E+00	6.21E-05	7.82E-07
Fe-59	9.69E-06	1.68E-05	6.77E-06	0.00E+00	0.00E+00	7.25E-04	1.77E-05
Co-57	0.00E+00	4.65E-07	4.56E-07	0.00E+00	0.00E+00	2.71E-04	3.47E-06
Co-58	0.00E+00	8.71E-07	1.30E-06	0.00E+00	0.00E+00	5.55E-04	7.95E-06
Co-60	0.00E+00	5.73E-06	8.41E-06	0.00E+00	0.00E+00	3.22E-03	2.28E-05
Ni-63	2.42E-04	1.46E-05	8.29E-06	0.00E+00	0.00E+00	1.49E-04	1.73E-06
Ni-65	1.71E-09	2.03E-10	8.79E-11	0.00E+00	0.00E+00	5.80E-06	3.58E-05
Cu-64	0.00E+00	1.34E-09	5.53E-10	0.00E+00	2.84E-09	6.64E-06	1.07E-05
Zn-65	1.38E-05	4.47E-05	2.22E-05	0.00E+00	2.32E-05	4.62E-04	3.67E-05
Zn-69	3.85E-11	6.91E-11	5.13E-12	0.00E+00	2.87E-11	1.05E-06	9.44E-06
Zn-69m	8.98E-09	1.84E-08	1.67E-09	0.00E+00	7.45E-09	1.91E-05	2.92E-05
Br-82	0.00E+00	0.00E+00	9.49E-06	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-83	0.00E+00	0.00E+00	2.72E-07	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-84	0.00E+00	0.00E+00	2.86E-07	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Br-85	0.00E+00	0.00E+00	1.46E-08	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Rb-86	0.00E+00	1.36E-04	6.30E-05	0.00E+00	0.00E+00	0.00E+00	2.17E-06
Rb-88	0.00E+00	3.98E-07	2.05E-07	0.00E+00	0.00E+00	0.00E+00	2.42E-07
Rb-89	0.00E+00	2.29E-07	1.47E-07	0.00E+00	0.00E+00	0.00E+00	4.87E-08
Sr-89	2.84E-04	0.00E+00	8.15E-06	0.00E+00	0.00E+00	1.45E-03	4.57E-05
Sr-90	2.92E-02	0.00E+00	1.85E-03	0.00E+00	0.00E+00	8.03E-03	9.36E-05
Sr-91	6.83E-08	0.00E+00	2.47E-09	0.00E+00	0.00E+00	3.76E-05	5.24E-05
Sr-92	7.50E-09	0.00E+00	2.79E-10	0.00E+00	0.00E+00	1.70E-05	1.00E-04
Y-90	2.35E-06	0.00E+00	6.30E-08	0.00E+00	0.00E+00	1.92E-04	7.43E-05
Y-91m	2.91E-10	0.00E+00	9.90E-12	0.00E+00	0.00E+00	1.99E-06	1.68E-06
Y-91	4.20E-04	0.00E+00	1.12E-05	0.00E+00	0.00E+00	1.75E-03	5.02E-05
Y-92	1.17E-08	0.00E+00	3.29E-10	0.00E+00	0.00E+00	1.75E-05	9.04E-05
Y-93	1.07E-07	0.00E+00	2.91E-09	0.00E+00	0.00E+00	5.46E-05	1.19E-04
Zr-95	8.24E-05	1.99E-05	1.45E-05	0.00E+00	2.22E-05	1.25E-03	1.55E-05
Zr-97	1.07E-07	1.83E-08	8.36E-09	0.00E+00	1.85E-08	7.88E-05	1.00E-04
Nb-95	1.12E-05	4.59E-06	2.70E-06	0.00E+00	3.37E-06	3.42E-04	9.05E-06
Nb-97	2.44E-10	5.21E-11	1.88E-11	0.00E+00	4.07E-11	2.37E-06	1.92E-05
Mo-99	0.00E+00	1.18E-07	2.31E-08	0.00E+00	1.89E-07	9.63E-05	3.48E-05
Tc-99m	9.98E-13	2.06E-12	2.66E-11	0.00E+00	2.22E-11	5.79E-07	1.45E-06
Tc-101	4.65E-14	5.88E-14	5.80E-13	0.00E+00	6.99E-13	4.17E-07	6.03E-07
Ru-103	1.44E-06	0.00E+00	4.85E-07	0.00E+00	3.03E-06	3.94E-04	1.15E-05
Ru-105	8.74E-10	0.00E+00	2.93E-10	0.00E+00	6.42E-10	1.12E-05	3.46E-05
Ru-106	6.20E-05	0.00E+00	7.77E-06	0.00E+00	7.61E-05	8.26E-03	1.17E-04
Ag-110m	7.13E-06	5.16E-06	3.57E-06	0.00E+00	7.80E-06	2.62E-03	2.36E-05

Table 7.6 INHALATION DOSE FACTORS
(mrem/pCi inhaled)
(Page 8 of 8)

	INFANT						
	bone	liver	t body	thyroid	kidney	lung	gi-III
Sb-124	2.71E-05	3.97E-07	8.56E-06	7.18E-08	0.00E+00	1.89E-03	4.22E-05
Sb-125	3.69E-05	3.41E-07	7.78E-06	4.45E-08	0.00E+00	1.17E-03	1.05E-05
Sn-125	1.01E-05	2.51E-07	6.00E-07	2.47E-07	0.00E+00	6.43E-04	7.26E-05
Te-125m	3.40E-06	1.42E-06	4.70E-07	1.16E-06	0.00E+00	3.19E-04	9.22E-06
Te-127m	1.19E-05	4.93E-06	1.48E-06	3.48E-06	2.68E-05	9.37E-04	1.95E-05
Te-127	1.59E-09	6.81E-10	3.49E-10	1.32E-09	3.47E-09	7.39E-06	1.74E-05
Te-129m	1.01E-05	4.35E-06	1.59E-06	3.91E-06	2.27E-05	1.20E-03	4.93E-05
Te-129	5.63E-11	2.48E-11	1.34E-11	4.82E-11	1.25E-10	2.14E-06	1.88E-05
Te-131m	7.62E-08	3.93E-08	2.59E-08	6.38E-08	1.89E-07	1.42E-04	8.51E-05
Te-131	1.24E-11	5.87E-12	3.57E-12	1.13E-11	2.85E-11	1.47E-06	5.87E-06
Te-132	2.66E-07	1.69E-07	1.26E-07	1.99E-07	7.39E-07	2.43E-04	3.15E-05
I-130	4.54E-06	9.91E-06	3.98E-06	1.14E-03	1.09E-05	0.00E+00	1.42E-06
I-131	2.71E-05	3.17E-05	1.40E-05	1.06E-02	3.70E-05	0.00E+00	7.56E-07
I-132	1.21E-06	2.53E-06	8.99E-07	1.21E-04	2.82E-06	0.00E+00	1.36E-06
I-133	9.46E-06	1.37E-05	4.00E-06	2.54E-03	1.60E-05	0.00E+00	1.54E-06
I-134	6.58E-07	1.34E-06	4.75E-07	3.18E-05	1.49E-06	0.00E+00	9.21E-07
I-135	2.76E-06	5.43E-06	1.98E-06	4.97E-04	6.05E-06	0.00E+00	1.31E-06
Cs-134	2.83E-04	5.02E-04	5.32E-05	0.00E+00	1.36E-04	5.69E-05	9.53E-07
Cs-136	3.45E-05	9.61E-05	3.78E-05	0.00E+00	4.03E-05	8.40E-06	1.02E-06
Cs-137	3.92E-04	4.37E-04	3.25E-05	0.00E+00	1.23E-04	5.09E-05	9.53E-07
Cs-138	3.61E-07	5.58E-07	2.84E-07	0.00E+00	2.93E-07	4.67E-08	6.26E-07
Ba-139	1.06E-09	7.03E-13	3.07E-11	0.00E+00	4.23E-13	4.25E-06	3.64E-05
Ba-140	4.00E-05	4.00E-08	2.07E-06	0.00E+00	9.59E-09	1.14E-03	2.74E-05
Ba-141	1.12E-10	7.70E-14	3.55E-12	0.00E+00	4.64E-14	2.12E-06	3.39E-06
Ba-142	2.84E-11	2.36E-14	1.40E-12	0.00E+00	1.36E-14	1.11E-06	4.95E-07
La-140	3.61E-07	1.43E-07	3.68E-08	0.00E+00	0.00E+00	1.20E-04	6.06E-05
La-142	7.36E-10	2.69E-10	6.46E-11	0.00E+00	0.00E+00	5.87E-06	4.25E-05
Ce-141	1.98E-05	1.19E-05	1.42E-06	0.00E+00	3.75E-06	3.69E-04	1.54E-05
Ce-143	2.09E-07	1.38E-07	1.58E-08	0.00E+00	4.03E-08	8.30E-05	3.55E-05
Ce-144	2.28E-03	8.65E-04	1.26E-04	0.00E+00	3.84E-04	7.03E-03	1.06E-04
Pr-143	1.00E-05	3.74E-06	4.99E-07	0.00E+00	1.41E-06	3.09E-04	2.66E-05
Pr-144	3.42E-11	1.32E-11	1.72E-12	0.00E+00	4.80E-12	1.15E-06	3.06E-06
Nd-147	5.67E-06	5.81E-06	3.57E-07	0.00E+00	2.25E-06	2.30E-04	2.23E-05
W-187	9.26E-09	6.44E-09	2.23E-09	0.00E+00	0.00E+00	2.83E-05	2.54E-05
Np-239	2.65E-07	2.37E-08	1.34E-08	0.00E+00	4.73E-07	4.25E-05	1.78E-05

NOTE: The tritium dose factor for bone is assumed to be equal to the total body dose factor.

Reference:

Regulatory Guide 1.109, Table E-10.

Dose Factors for Co-57, Zn-69m, Br-82, Nb-97, Sn-125, Sb-124 and Sb-125 are from NUREG-0172 Age Specific Radiation Dose Commitment Factors for a One Year Chronic Intake, November 1977, Table 8.

Figure 7.1 GASEOUS EFFLUENT RELEASE POINTS




Figure 7.2 AUXILIARY AND SHIELD BUILDING VENTS (DETAIL)

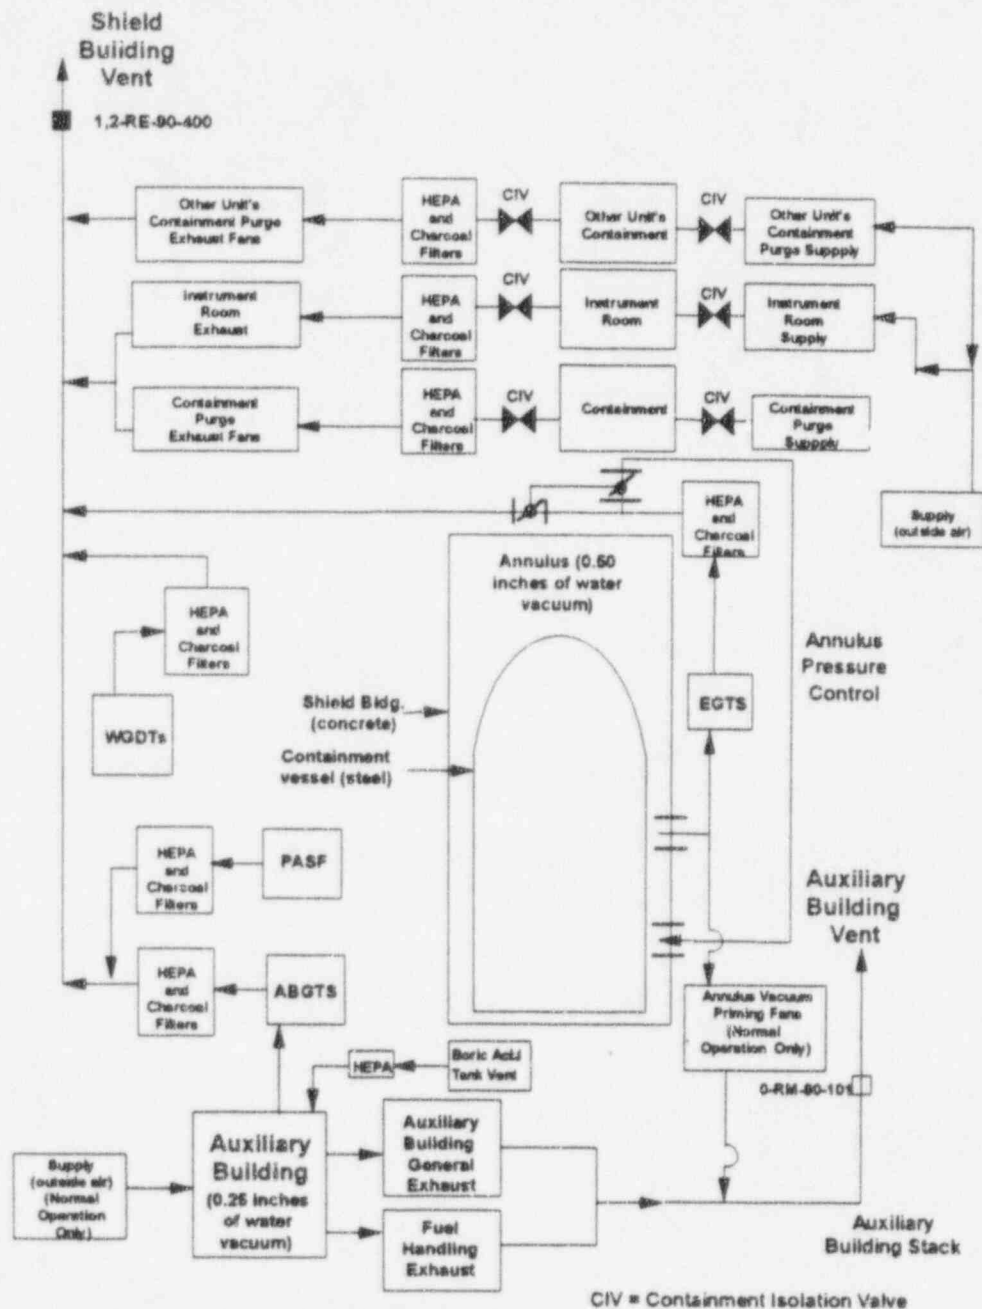


Figure 7.3 GASEOUS RADWASTE TREATMENT SYSTEM

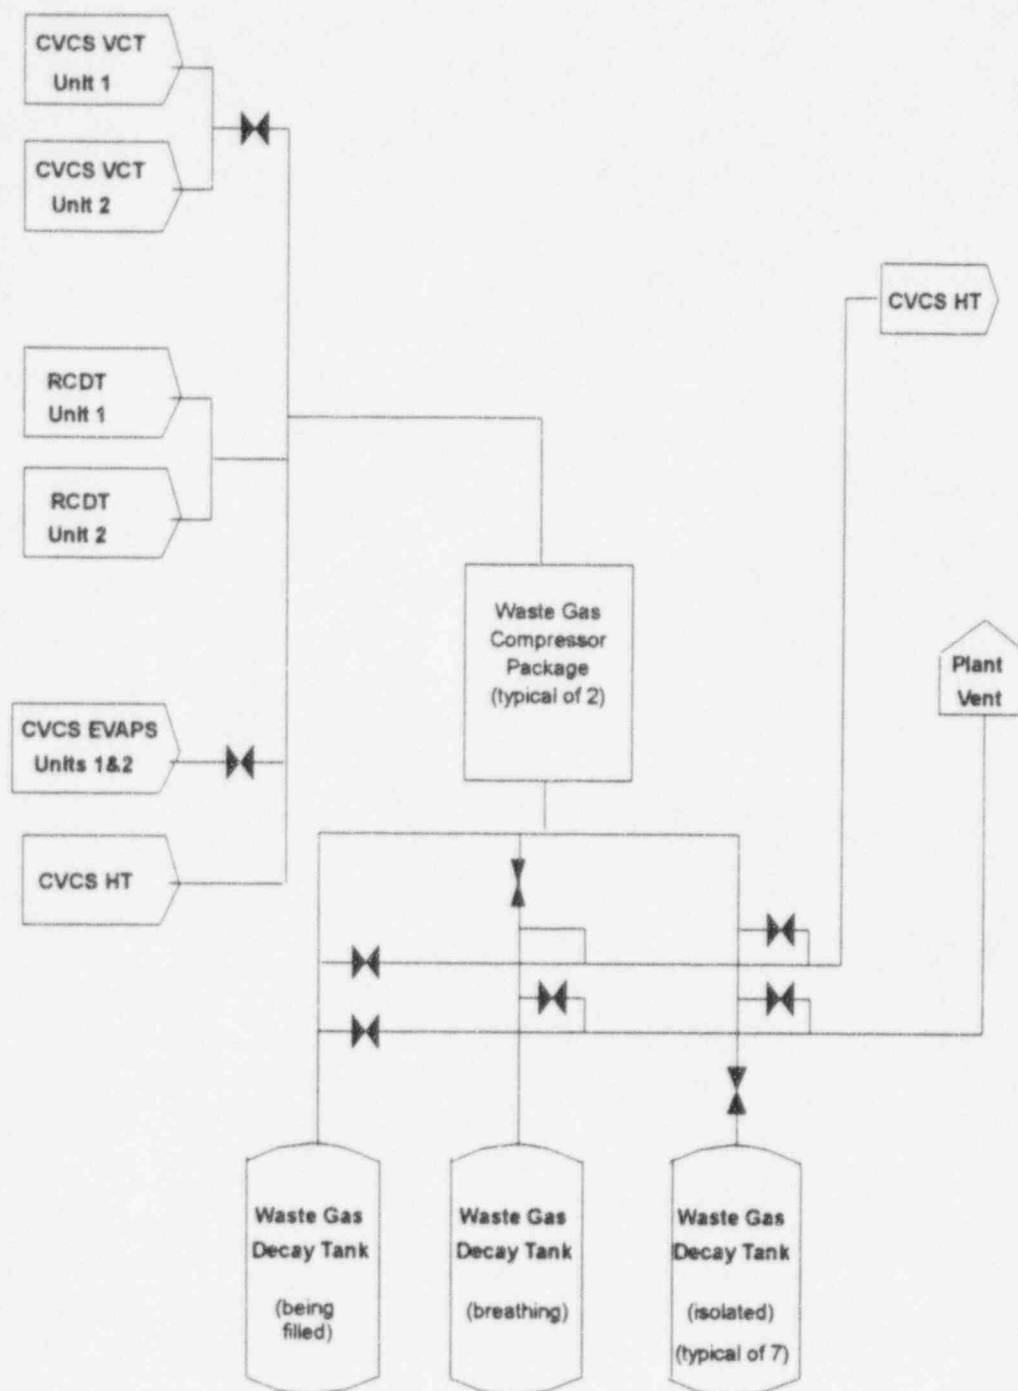


Figure 7.4 PLUME DEPLETION EFFECT FOR GROUND LEVEL RELEASES
(All Stability Classes)






Figure 7.5 VERTICAL STANDARD DEVIATION OF MATERIAL IN A PLUME



Vertical Standard Deviation of Material in a Plume
(Letters denote Pasquill Stability Class)

Figure 7.6 RELATIVE DEPOSITION FOR GROUND LEVEL RELEASES
(All Stability Classes)



Relative Deposition for Ground-Level Releases (All Atmospheric Stability Classes)

SECTION 8.0

TOTAL DOSE

SECTION 8.0 TOTAL DOSE

8.1 ANNUAL MAXIMUM INDIVIDUAL DOSES - TOTAL REPORTED DOSE

To determine compliance with 40 CFR 190 as required in ODCM Administrative Control 5.2, the annual dose contributions to the maximum individual from SQN radioactive effluents and all other nearby uranium fuel cycle sources will be considered. The annual dose to the maximum individual will be conservatively estimated by first, summing the quarterly total body air submersion dose, the quarterly critical organ dose from gaseous effluents, the quarterly total body dose from liquid effluents, the quarterly critical organ dose from liquid effluents, and the direct radiation monitoring program, and then taking the sum for each quarter and summing over the four quarters.

SECTION 9.0

RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM

SECTION 9.0 RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM

9.1 MONITORING PROGRAM

An environmental radiological monitoring program shall be conducted in accordance with ODCM Control 1.3.1. The monitoring program described in Tables 9.1, 9.2, and 9.3, and in Figures 9.1, 9.2 and 9.3 shall be conducted. Results of this program shall be reported in accordance with ODCM Administrative Control 5.1.

The atmospheric environmental radiological monitoring program shall consist of monitoring stations from which samples of air particulates and atmospheric radioiodine shall be collected.

The terrestrial monitoring program shall consist of the collection of milk, soil, ground water, drinking water, and food crops. In addition, direct gamma radiation levels will be measured in the vicinity of the plant.

The reservoir sampling program shall consist of the collection of samples of surface water, sediment, clams, and fish.

Deviations are permitted from the required sampling schedule if specimens are unobtainable due to hazardous conditions, sample unavailability, or to malfunction of sampling equipment. If the latter, every effort shall be made to complete corrective action prior to the end of the next sampling period.

9.2 DETECTION CAPABILITIES

Analytical techniques shall be such that the detection capabilities listed in Table 2.3-3 are achieved.

9.3 LAND USE CENSUS

A land use survey shall be conducted in accordance with Control 1.3.2. The results of the survey shall be reported in the Annual Radiological Environmental Operating Report.

9.4 INTERLABORATORY COMPARISON PROGRAM

Analyses shall be performed on radioactive materials supplied as part of an Interlaboratory Comparison Program which has been approved by the NRC. A summary of the results obtained in the intercomparison shall be included in the Annual Radiological Environmental Operating Report (or the EPA program code designation may be provided).

If analyses are not performed as required corrective actions taken to prevent a recurrence shall be reported in the Annual Radiological Environmental Operating Report.

Table 9.1 RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM
(Page 1 of 4)

Exposure Pathway and/or Sample	Sample Locations*	Sampling and Collection Frequency	Type and Frequency of Analysis
AIRBORNE			
Particulates	<p>4 samples from locations (in different sectors) at or near the site boundary (LM-2,3,4, and 5)</p> <p>4 samples from communities approximately 6-10 miles distance from the plant. (PM-2,3,8, and 9)</p> <p>4 samples from control locations greater than 10 miles from the plant (RM-1,2,3, and 4)</p>	Continuous sampler operation with sample collection once per 7 d (more frequently if required by dust loading)	Analyze for gross beta radioactivity \geq 24 hours following filter change. Perform gamma isotopic analysis on each sample if gross beta $>$ 10 times yearly mean of control sample. Composite at least once per 31 d (by location for gamma scan)
Radioiodine	Samples from same location as air particulates	Continuous sampler operation with filter collection once per 7 d	I-131 at least once per 7 d
Soil	Samples from same locations as air particulates	Once per year	Gamma scan, Sr-89, Sr-90 once per year
DIRECT RADIATION			
	2 or more dosimeters placed at locations (in different sectors at or near the site boundary) in each of the 16 sectors.	Once per 92 d	Gamma dose at least once per 92 d

* Sample locations are listed in Tables 9.2 and 9.3 and shown on Figures 9.1, 9.2 and 9.3

Table 9.1 RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM
(Page 2 of 4)

Exposure Pathway and/or Sample	Sample Locations*	Sampling and Collection Frequency	Type and Frequency of Analysis
DIRECT RADIATION (continued)			
	2 or more dosimeters placed at stations located >5 miles from the plant in each of the 16 sectors 2 or more dosimeters in at least 8 additional locations of special interest.		
WATERBORNE			
Surface	TRM 497.0 TRM 483.4 TRM 473.2	Collected by automatic sequential type sampler** with composite samples collected at least once per 31 d.	Gamma scan of each composite sample. Composite for H-3 analysis at least once per 92 d.
Ground	1 sample adjacent to plant (location W-6) 1 sample from groundwater source up- gradient	At least once per 92 d	Gross beta and gamma scan, Sr-89, Sr-90 and H-3 analysis at least once per 92 d.

* Sample locations are listed in Tables 9.2 and 9.3 and shown on Figures 9.1, 9.2 and 9.3

** Samples shall be collected by collecting an aliquot at intervals not exceeding 2 hours.

Table 9.1 RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM
(Page 3 of 4)

Exposure Pathway and/or Sample	Sample Locations*	Sampling and Collection Frequency	Type and Frequency of Analysis
WATERBORNE (continued)			
Drinking	<p>1 sample at the first potable water supply downstream from the plant (TRM 473.0)</p> <p>1 sample at the next 2 downstream potable surface water supplies (greater than 10 miles downstream) (TRM 470.5 and 465.3)</p> <p>2 samples at control locations (TRM 497.0 and 503.8)***</p>	<p>Collected by automatic sequential type sampler** with composite samples collected at least once per 31 d</p> <p>Grab sample once per 31 d.</p> <p>Samples collected by automatic sequential type sampler** with composite sample collected at least once per 31 d.</p>	<p>Gross beta and gamma scan of each composite sample.</p> <p>Composite for H-3, Sr-89, and Sr-90 at least once per 92 d.</p>
Sediment	TRM 496.5, 483.4, 480.8, TRM 472.8	At least once per 184 d	Gamma scan of each sample.
Shoreline	TRM 485, TRM 478, TRM 477	At least once per 184 d	Gamma scan of each sample.
INGESTION			
Milk	<p>1 sample from milk producing animals in each of 1-3 areas indicated by the cow census where doses are calculated to be highest.</p> <p>If samples are not available from a milk animal location, doses to that area will be estimated by projecting the doses from concentrations detected in milk from other sectors or samples of vegetation will be taken monthly when milk is not available.</p> <p>At least 1 sample from a control location.</p>	At least once per 15 d.	Gamma isotopic and I-131 analysis of each sample. Sr-89, Sr-90 once per year.

* Sample locations are listed in Tables 9.2 and 9.3 and shown on Figures 9.1, 9.2 and 9.3

** Samples shall be collected by collecting an aliquot at intervals not exceeding 2 hours.

*** The surface water sample collected at TRM 497.0 is considered a control for the raw drinking water sample.

Table 9.1 RADIOLOGICAL ENVIRONMENTAL MONITORING PROGRAM
(Page 4 of 4)

Exposure Pathway and/or Sample	Sample Locations*	Sampling and Collection Frequency	Type and Frequency of Analysis
INGESTION			
Fish	1 sample each from Chickamauga and Watts Bar Reservoirs.	At least once per 184 d. One sample of each of the following species: Channel Catfish Crappie Smallmouth Buffalo	Gamma scan on edible portion.
Invertebrates (Asiatic Clams)	1 sample downstream from plant discharge** 1 sample upstream of plant discharge**	At least once per 184 d	Gamma scan on edible portion.
Food Products	1 sample each of principle food products grown at private gardens and/or farms in the vicinity of the plant.	At least once per 365 d at time of harvest. The types of foods available for sampling will vary. Following is a list of typical foods which may be available: Cabbage and/or lettuce Corn Green Beans Potatoes Tomatoes	Gamma scan on edible portion.
Vegetation	Samples from farms producing milk but not providing a milk sample (Farm Em) Control Sample from one control dairy farm (Farm S)	At least once per 31 d	I-131 and gamma scan at least once per 31 d

* Sample locations are listed in Tables 9.2 and 9.3 and shown on Figures 9.1, 9.2 and 9.3

** No permanent stations established. Locations depend on availability of clams.

Table 9.2 ENVIRONMENTAL RADIOLOGICAL MONITORING PROGRAM SAMPLING LOCATIONS

Map Location Number ^a	Station	Sector	Approximate Distance	Indicator (I) or Control	Samples Collected ^b
2	LM-2	N	0.8	I	AP, CF, S
3	LM-3	SSW	2.0	I	AP, CF, S
4	LM-4	NE	1.5	I	AP, CF, S
5	LM-5	NNE	1.8	I	AP, CF, S
7	PM-2	SW	3.8	I	AP, CF, S
8	PM-3	W	5.6	I	AP, CF, S
9	PM-8	SSW	8.7	I	AP, CF, S
10	PM-9	WSW	2.6	I	AP, CF, S
11	RM-1	SW	16.7	C	AP, CF, S
12	RM-2	NNE	17.8	C	AP, CF, S
13	RM-3	ESE	11.3	C	AP, CF, S
14	RM-4	WNW	18.9	C	AP, CF, S
15	Farm B	NE	43.0	C	M
16	Farm C	NE	16.0	C	M
17	Farm S	NNE	12.0	C	M, V
18	Farm J	WNW	1.1	I	M
19	Farm HW	NW	1.2	I	M, W ^c
20	Farm EM	N	2.6	I	V
24	Well No. 6	NNE	0.15 ^e	I	W
31	TRM 473.0 (C. F. Industries)	--	11.5 ^e	I	PW
32	TRM 470.5 (E. I. DuPont)	--	14.0 ^e	I	PW
33	TRM 465.3 (Chattanooga)	--	19.2 ^e	I	PW
34	TRM 497.0	--	12.5 ^e	C	SW
35	TRM 503.8 (Dayton)	--	19.3 ^e	C	PW
36	TRM 496.5	--	12.0 ^e	C	SD
37	TRM 485.0	--	0.5 ^e	C	SS
38	TRM 483.4	--	1.1 ^e	I	SD, SW
39	TRM 480.8	--	3.7 ^e	I	SD
40	TRM 477.0	--	7.5 ^e	I	SS
41	TRM 473.2	--	11.3 ^e	I	SW
42	TRM 472.8	--	11.7 ^e	I	SD
44	TRM 478.8	--	6.5 ^e	I	SS
46	TRM 471-530 (Chickamauga Reservoir)	--		I/C	F/CL
47	TRM 530-602	--	--	C	F
48	Farm H	NE	4.2	I	M

^a See figures 9.1, 9.2, and 9.3

^b Sample Codes: AP = Air particulate filter CF = Charcoal filter CL = Clams F = Fish
M = Milk PW = Public water R = Rainwater SD = Sediment S = Soil
SS = Shoreline sediment SW = Surface water V = Vegetation W = Well water

^c A control for well water.

^d TRM = Tennessee River Mile.

^e Distance from plant discharge (TRM 484.5)

^f Surface water sample also used as a control for public water.

Table 9.3 THERMOLUMINESCENT DOSIMETRY LOCATIONS
(Page 1 of 2)

<u>Map Location Number</u>	<u>Station</u>	<u>Sector</u>	<u>Approximate Distance (Miles)</u>	<u>(Onsite)a or Offsite (Off)</u>
3	SSW-1C	SSW	2.0	On
4	NE-1A	NE	1.5	On
5	NNE-1	NNE	1.8	On
7	SW-2	SW	3.8	Off
8	W-3	W	5.6	Off
9	SSW-3	SSW	8.7	Off
10	WSW-2A	WSW	2.6	Off
11	SW-3	SW	16.7	Off
12	NNE-4	NNE	17.8	Off
13	ESE-3	ESE	11.3	Off
14	WNW-3	WNW	18.9	Off
49	N-1	N	0.6	On
50	N-2	N	2.1	Off
51	N-3	N	5.2	Off
52	N-4	N	10.0	Off
53	NNE-2	NNE	4.5	Off
54	NNE-3	NNE	12.1	Off
55	NE-1	NE	2.4	Off
56	NE-2	NE	4.1	Off
57	ENE-1	ENE	0.4	On
58	ENE-2	ENE	5.1	Off
59	E-1	E	1.2	On
60	E-2	E	5.2	Off
61	ESE-A	ESE	0.3	On
62	ESE-1	ESE	1.2	On
63	ESE-2	ESE	4.9	Off
64	SE-A	SE	0.4	On
65	E-A	E	0.3	On
66	SE-1	SE	1.4	On
67	SE-2	SE	1.9	On
68	SE-4	SE	5.2	Off
69	SSE-1	SSE	1.6	On
70	SSE-2	SSE	4.6	Off
71	S-1	S	1.5	On
72	S-2	S	4.7	Off
73	SSW-1	SSW	0.6	On
74	SSW-2	SSW	4.0	Off

^aTLDs designated onsite are those located two miles or less from the plant.

TLDs designated offsite are those located more than two miles from the plant.

Table 9.3 THERMOLUMINESCENT DOSIMETRY LOCATIONS
(Page 2 of 2)

<u>Map Location Number</u>	<u>Station</u>	<u>Sector</u>	<u>Approximate Distance (Miles)</u>	<u>Onsite (On)^a or Offsite (Off)</u>
75	SW-1	SW	0.9	On
76	WSW-1	WSW	0.9	On
77	WSW-2	WSW	2.5	Off
78	WSW-3	WSW	5.7	Off
79	WSW-4	WSW	7.8	Off
80	WSW-5	WSW	10.1	Off
81	W-1	W	0.8	On
82	W-2	W	4.3	Off
83	WNW-1	WNW	0.4	On
84	WNW-2	WNW	5.3	Off
85	NW-1	NW	0.4	On
86	NW-2	NW	5.2	Off
87	NNW-1	NNW	0.6	On
88	NNW-2	NNW	1.7	On
89	NNW-3	NNW	5.3	Off
90	SSW-1B	SSW	1.5	On

^aTLDs designated onsite are those located two miles or less from the plant.
TLDs designated offsite are those located more than two miles from the plant.

Figure 9.1 ENVIRONMENTAL MONITORING LOCATIONS WITHIN ONE MILE OF THE PLANT

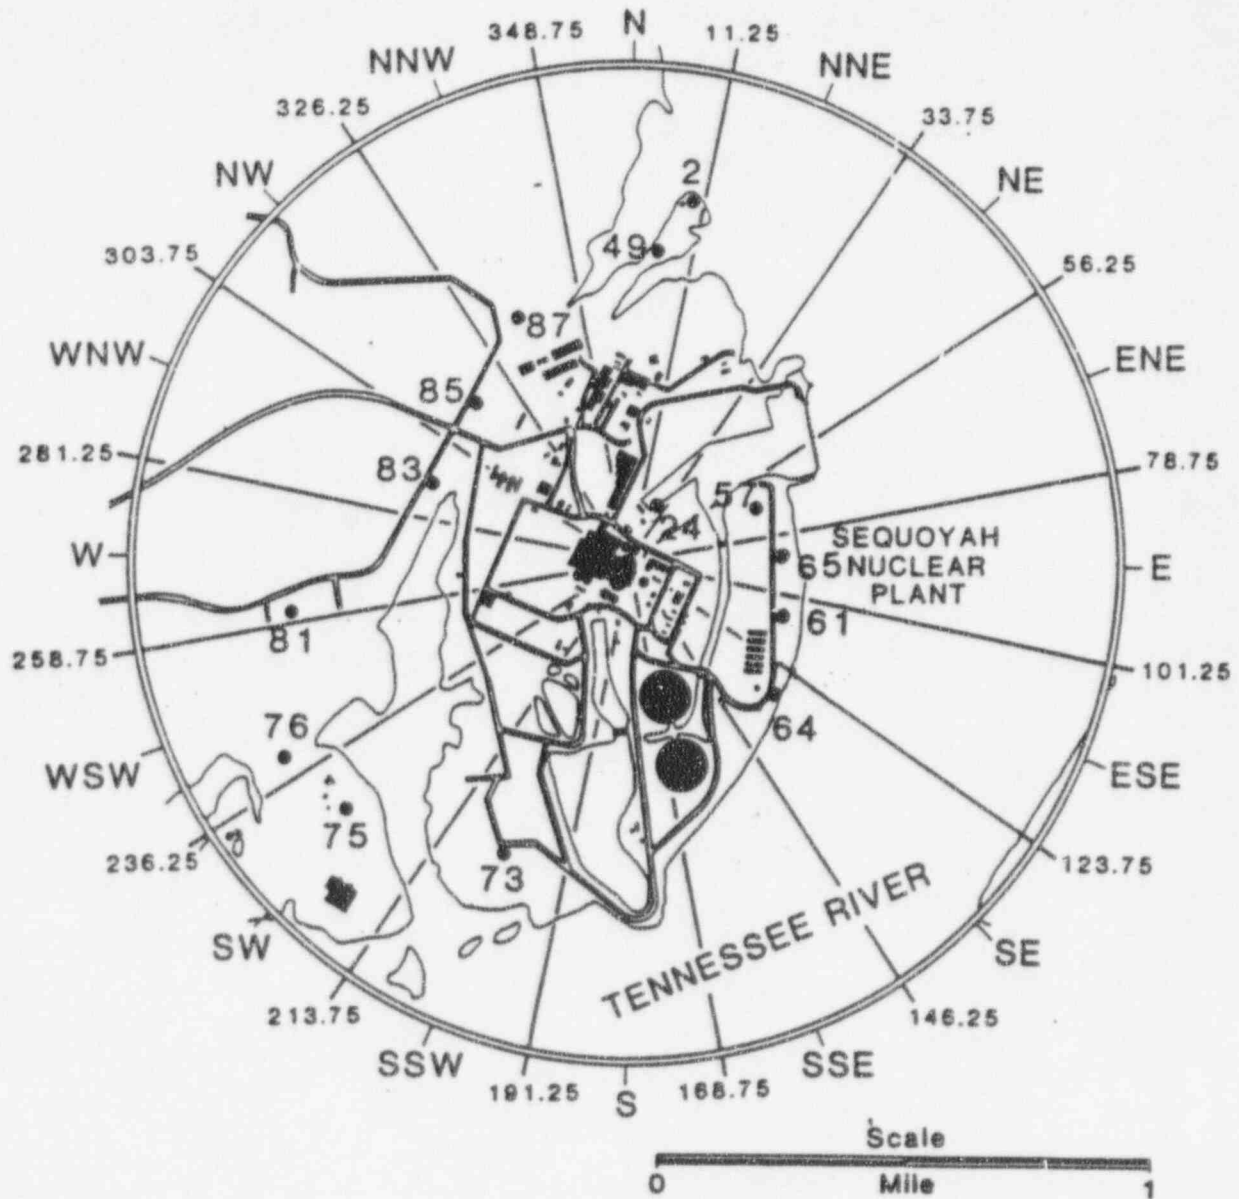


Figure 9.2 ENVIRONMENTAL MONITORING LOCATIONS FROM ONE TO FIVE MILES FROM
THE PLANT




Figure 9.3 ENVIRONMENTAL MONITORING LOCATIONS GREATER THAN FIVE MILES FROM THE PLANT

