

# A-54 SCREW TYPE TERMINAL BLOCK

50-348/364-CVP

2/20/92

APCo Exhibit 54

UNITED STATES

PS3



PS3—is similar to the P3 except it is provided with 6-32 screws. These blocks are non-stacking.


CONNECTRON

'92 MAR 13 P4:42

screw-type terminal blocks

INC.

OFFICE OF MARKETING & SALES BRANCH

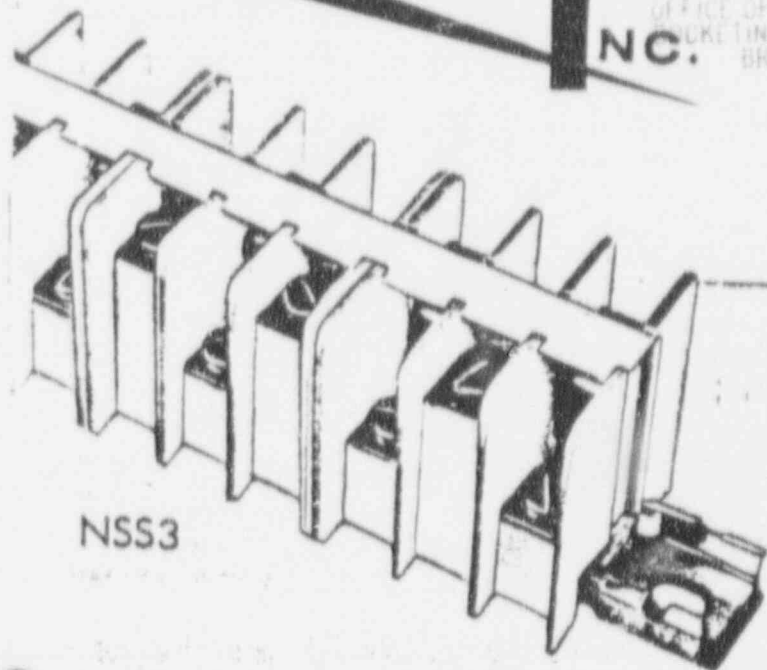

NSS3

NSS3 "the screw-type block with a plus" was designed specifically for control and power circuit applications (#22 to #10 wire range) where the requirements call for crimp-on lugs (6-32 screw). Compact step-type configuration assures full 600V spacings even with uninsulated crimp-on lugs. This unexcelled safety feature carries the "fringe benefit" of saving you 2½ cents per circuit—the difference between the cost of insulated and uninsulated crimp-on lugs.


SN3



The SN3 is a clamping-screw clamping-collar interface block designed for applications where preference or specifications dictate the use of crimp-on connectors on one side, and direct wire insertion into a clamping collar on the other.

The special tilted design provides easy access to the screws and excellent visibility of collar openings.

Screws will accept spade or ring terminals from #22 - #10 wire. Collars will accept copper or aluminum wires from #22 - #8.

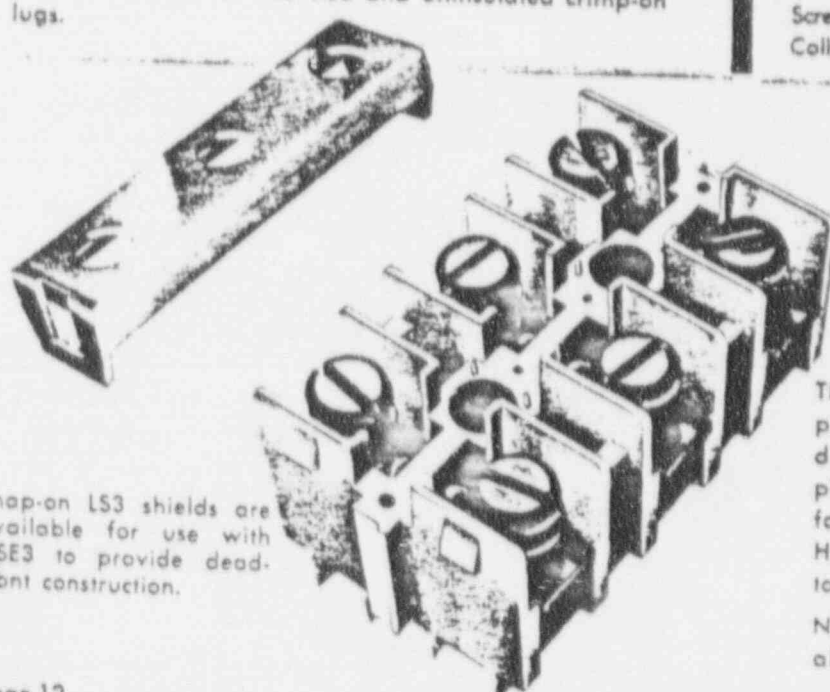

NSE3

This 3-circuit block, with a range of #8-#2, 600V, complements NSS3 and U2 for power applications. The 1/2" diameter screws with retained lock-washers thread into plated steel nuts, thus providing for a high clamping force and safeguarding the assembly against vibration. High conductivity plated copper parts and generous pole-to-pole spacings assure cool and trouble-free operation. NSE3 mounts on the standard Connectron rail, but may also be mounted independently.

Snap-on L53 shields are available for use with NSE3 to provide dead-front construction.

Docket No. 50-348/344-CIVIL Initial Case No. 54  
in the matter of Alabama Power Company

Sent \_\_\_\_\_ RECEIVED 3:40 p.m.  
Received ☒ RECEIVED 3:41 p.m.  
Interviewed \_\_\_\_\_ REQUESTED \_\_\_\_\_  
County Clerk \_\_\_\_\_  
Contractor \_\_\_\_\_ DATE 2/20/92  
Other \_\_\_\_\_ WITNESS \_\_\_\_\_  
Reporter L. Estep