

MATERIALS LICENSE

Pursuant to the Atomic Energy Act of 1954, as amended, the Energy Reorganization Act of 1974 (Public Law 93-438), and Title 10, Code of Federal Regulations, Chapter I, Parts 30, 31, 32, 33, 34, 35, 40 and 70, and in reliance on statements and representations heretofore made by the licensee, a license is hereby issued authorizing the licensee to receive, acquire, possess, and transfer byproduct, source, and special nuclear material designated below; to use such material for the purpose(s) and at the place(s) designated below; to deliver or transfer such material to persons authorized to receive it in accordance with the regulations of the applicable Part(s); and to import such byproduct and source material. This license shall be deemed to contain the conditions specified in Section 183 of the Atomic Energy Act of 1954, as amended, and is subject to all applicable rules, regulations and orders of the Nuclear Regulatory Commission now or hereafter in effect and to any conditions specified below.

Licensee		
1. Siemens Medical Systems, Inc.	3. License number	12-00369-02
2. 2000 Nuclear Drive Des Plaines, IL 60005	4. Expiration date	November 30, 1989
	5. Docket or Reference No.	34-1835
6. Byproduct, source, and/or special nuclear material	7. Chemical and/or physical form	8. Maximum amount that licensee may possess at any one time under this license
A. Americium-241	A. Sealed Sources	A. No single source to exceed 2 millicuries
B. Barium-133	B. Sealed Sources	B. No single source to exceed 2 millicuries
9. Authorized Use		
A. and B. For use in testing, calibration and demonstration of nuclear medicine analytical and imaging systems.		

CONDITIONS

10. Licensed material shall be stored at Siemen's Medical Systems, Inc., field offices in accordance with procedures contained in application dated July 23, 1984. The licensee shall submit an up-dated listing of field office locations at intervals not to exceed 12 months. Licensed materials may also be used at temporary job-sites of the licensee anywhere in the United States where the U.S. Nuclear Regulatory Commission maintains jurisdiction for regulating the use of licensed materials.

8512090146 841105
REG3 LIC30
12-00369-02 PDR

11
COPY 2

ML 30 CM

**MATERIALS LICENSE
SUPPLEMENTARY SHEET**

License number

12-00369-02

Docket or Reference number

11. The licensee shall comply with the provisions of Title 10, Chapter 1, Code of Federal Regulations, Part 19, "Notices, Instructions and Reports to Workers; Inspections" and Part 20, "Standards for Protection Against Radiation."
12. Licensed material shall be used by, or under the supervision and in the physical present of individuals who have completed the licensee's training program and who have been approved by the licensee's Radiation Safety Officer, William E. Todd. The licensee shall maintain records of the individuals who have been approved by the licensee's Radiation Safety Officer.
13. A. (1) Each sealed source containing licensed material, other than Hydrogen 3, with a half-life greater than thirty days and in any form other than gas shall be tested for leakage and/or contamination at intervals not to exceed six months. In the absence of a certificate from a transferor indicating that a test has been made within six months prior to the transfer, a sealed source received from another person shall not be put into use until tested.
(2) Notwithstanding the periodic leak test required by this condition, any licensed sealed source is exempt from such leak tests when the source contains 100 microcuries or less of beta and/or gamma emitting material or 10 microcuries or less of alpha emitting material.
B. The test shall be capable of detecting the presence of 0.005 microcurie of radioactive material on the test sample. The test sample shall be taken from the sealed source or from the surfaces of the device in which the sealed source is permanently mounted or stored on which one might expect contamination to accumulate. Records of leak test results shall be kept in units of microcuries and maintained for inspection by the Commission.
C. If the test reveals the presence of 0.005 microcurie or more of removable contamination, the licensee shall immediately withdraw the sealed source from use and shall cause it to be decontaminated and repaired or to be disposed of in accordance with Commission regulations. A report shall be filed within five (5) days of the test with the U.S. Nuclear Regulatory Commission, Region III, 799 Roosevelt Road, Glen Ellyn, Illinois 60137, describing the equipment involved, the test results, and the corrective action taken.
D. Tests for leakage and/or contamination shall be performed by the licensee or by other persons specifically authorized by the Commission or an Agreement State to perform such services.
14. Sealed sources containing licensed material shall not be opened or removed from their respective source holders by the licensee.
15. Licensed material shall not be used in or on human beings or in products distributed to the public.


**MATERIALS LICENSE
SUPPLEMENTARY SHEET**

License number

12-00369-02

Docket or Reference number

16. The licensee shall conduct a physical inventory every six (6) months to account for all sealed sources received and possessed under the license. The records of the inventories shall be maintained for two (2) years from the date of the inventory for inspection by the Commission, and shall include the quantities and kinds of byproduct material, location of sealed sources and the date of the inventory.
17. Except as specifically provided otherwise by this license, the licensee shall possess and use licensed material described in Items 6, 7, and 8 of this license in accordance with statements, representations, and procedures contained in application dated July 23, 1984. The Nuclear Regulatory Commission's regulations shall govern the licensee's statements in applications or letters, unless the statements are more restrictive than the regulations.

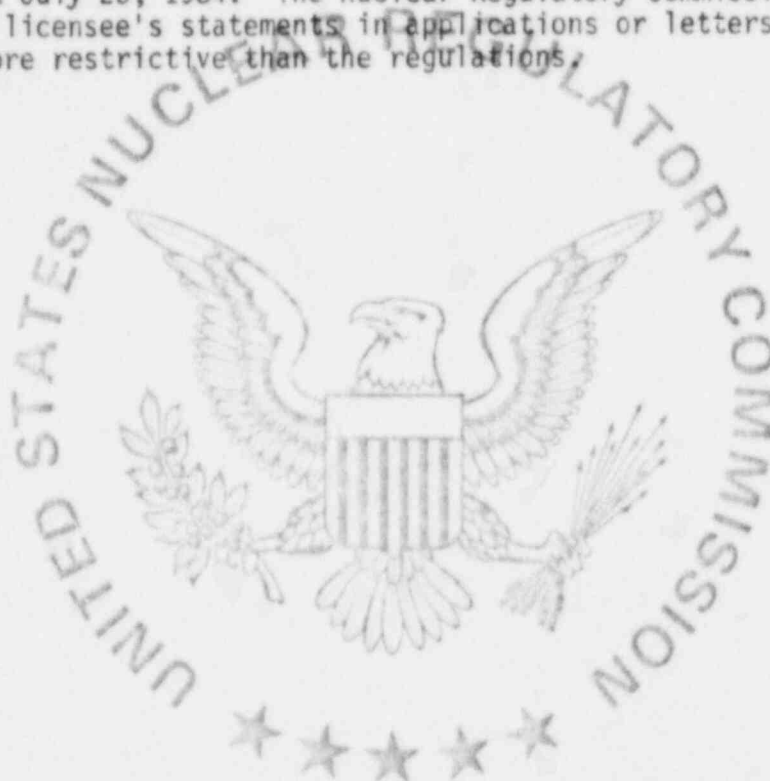

For the U.S. Nuclear Regulatory Commission

Date November 5, 1984

Original Signed
By George M. McCann
Materials Licensing Section, Region III

COPY