

CHAPTER TABLE OF CONTENTS

CHAPTER 3.1

REACTIVITY CONTROL SYSTEMS

| <u>Section</u> | <u>Page</u> |
|---|-------------|
| 3.1.1 SHUTDOWN MARGIN (SDM) | 3.1-1 |
| ACTIONS | 3.1-1 |
| SURVEILLANCE REQUIREMENTS | 3.1-1 |
| 3.1.2 Core Reactivity | 3.1-2 |
| ACTIONS | 3.1-2 |
| SURVEILLANCE REQUIREMENTS | 3.1-3 |
| 3.1.3 Moderator Temperature Coefficient (MTC) | 3.1-4 |
| ACTIONS | 3.1-4 |
| SURVEILLANCE REQUIREMENTS | 3.1-5 |
| 3.1.4 Rod Group Alignment Limits | 3.1-7 |
| ACTIONS | 3.1-7 |
| SURVEILLANCE REQUIREMENTS | 3.1-10 |
| 3.1.5 Shutdown Bank Insertion Limits | 3.1-11 |
| ACTIONS | 3.1-11 |
| SURVEILLANCE REQUIREMENTS | 3.1-12 |
| 3.1.6 Control Bank Insertion Limits | 3.1-13 |
| ACTIONS | 3.1-13 |
| SURVEILLANCE REQUIREMENTS | 3.1-14 |
| 3.1.7 Rod Position Indication | 3.1-16 |
| ACTIONS | 3.1-16 |
| SURVEILLANCE REQUIREMENTS | 3.1-18 |

CHAPTER TABLE OF CONTENTS (Continued)

| <u>Section</u> | <u>Page</u> |
|---|-------------|
| 3.1.8 PHYSICS TESTS Exceptions - MODE 2 | 3.1-19 |
| ACTIONS. | 3.1-19 |
| SURVEILLANCE REQUIREMENTS | 3.1-20 |
| 3.1.9 RCS Boron Limitations < 500°F | 3.1-22 |
| ACTIONS | 3.1-22 |
| SURVEILLANCE REQUIREMENTS | 3.1-23 |

LIST OF FIGURES

Number

Title

3.1.3-1

Moderator Temperature Coefficient vs. Power Level

3.1 REACTIVITY CONTROL SYSTEMS

3.1.1 SHUTDOWN MARGIN (SDM)

LCO 3.1.1 SDM shall be within the limits provided in the COLR.

APPLICABILITY: MODE 2 with $k_{\text{eff}} < 1.0$,
MODES 3, 4, and 5.

ACTIONS

| CONDITION | REQUIRED ACTION | COMPLETION TIME |
|--------------------------|---|-----------------|
| A. SDM not within limit. | A.1 Initiate boration to restore SDM to within limit. | 15 minutes |

SURVEILLANCE REQUIREMENTS

| SURVEILLANCE | FREQUENCY |
|--|---|
| SR 3.1.1.1 Verify SDM to be within limits. | In accordance with the Surveillance Frequency Control Program |

3.1 REACTIVITY CONTROL SYSTEMS

3.1.2 Core Reactivity

LCO 3.1.2 The measured core reactivity shall be within $\pm 1\% \Delta k/k$ of predicted values.

APPLICABILITY: MODES 1 and 2.

ACTIONS

| CONDITION | REQUIRED ACTION | COMPLETION TIME |
|--|--|-----------------|
| A. Measured core reactivity not within limit. | A.1 Re evaluate core design and safety analysis, and determine that the reactor core is acceptable for continued operation. | 7 days |
| | <u>AND</u> A.2 Establish appropriate operating restrictions and SRs. | 7 days |
| B. Required Action and associated Completion Time not met. | B.1 Be in MODE 3. | 6 hours |

SURVEILLANCE REQUIREMENTS

| SURVEILLANCE | FREQUENCY |
|--|--|
| <p>SR 3.1.2.1 ----- NOTE -----</p> <p>The predicted reactivity values may be adjusted (normalized) to correspond to the measured core reactivity prior to exceeding a fuel burnup of 60 effective full power days (EFPD) after each fuel loading.</p> <p>-----</p> <p>Verify measured core reactivity is within $\pm 1\%$ $\Delta k/k$ of predicted values.</p> | <p>Once prior to entering MODE 1 after each refueling</p> <p><u>AND</u></p> <p>-----NOTE----- Only required after 60 EFPD -----</p> <p>In accordance with the Surveillance Frequency Control Program</p> |

3.1 REACTIVITY CONTROL SYSTEMS

3.1.3 Moderator Temperature Coefficient (MTC)

LCO 3.1.3 The MTC shall be maintained within the limits specified in the COLR. The maximum upper limit shall be that specified in [Figure 3.1.3-1](#).

APPLICABILITY: MODE 1 and MODE 2 with $k_{\text{eff}} \geq 1.0$ for the upper MTC limit, MODES 1, 2, and 3 for the lower MTC limit.

ACTIONS

| CONDITION | REQUIRED ACTION | COMPLETION TIME |
|---|--|-----------------|
| A. MTC not within upper limit. | A.1 Establish administrative withdrawal limits for control banks to maintain MTC within limit. | 24 hours |
| B. Required Action and associated Completion Time of Condition A not met. | B.1 Be in MODE 2 with $k_{\text{eff}} < 1.0$. | 6 hours |
| C. MTC not within lower limit. | C.1 Be in MODE 4. | 12 hours |

SURVEILLANCE REQUIREMENTS

| SURVEILLANCE | | FREQUENCY |
|--------------|---|--|
| SR 3.1.3.1 | Verify MTC is within upper limit. | Once prior to entering MODE 1 after each refueling |
| SR 3.1.3.2 | <p>----- NOTES -----</p> <ol style="list-style-type: none"> 1. Not required to be performed until 7 effective full power days (EFPD) after reaching the equivalent of an equilibrium RTP all rods out (ARO) boron concentration of 300 ppm. 2. If the MTC is more negative than the 300 ppm Surveillance limit (not LCO limit) specified in the COLR, SR 3.1.3.2 shall be repeated once per 14 EFPD during the remainder of the fuel cycle. 3. SR 3.1.3.2 need not be repeated if the MTC measured at the equivalent of equilibrium RTP-ARO boron concentration of ≤ 60 ppm is less negative than the 60 ppm Surveillance limit specified in the COLR. <p>-----</p> <p>Verify MTC is within lower limit.</p> | Once each cycle |

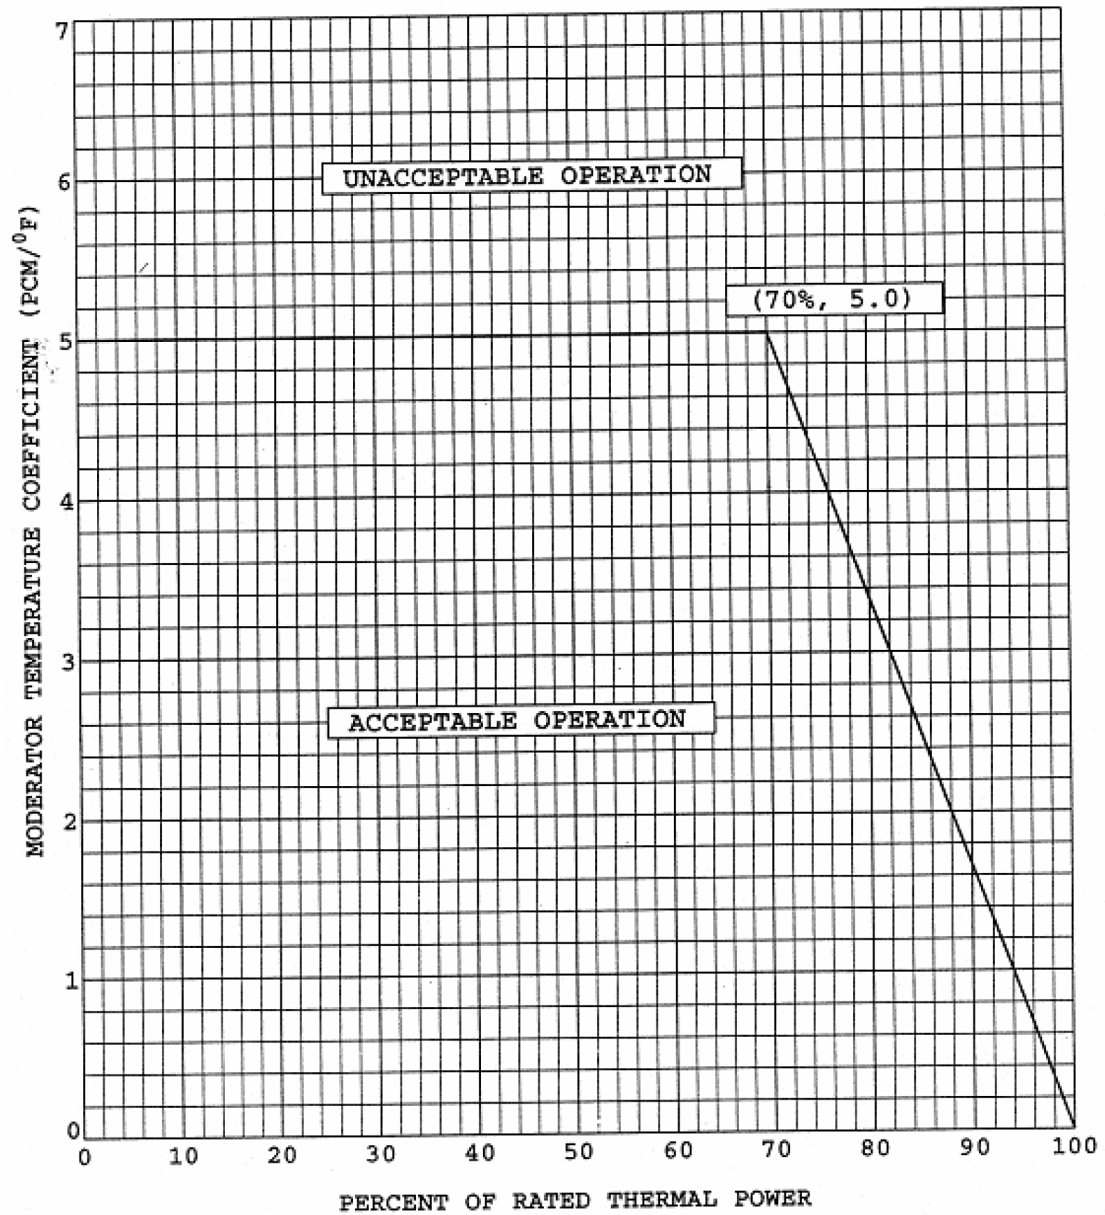


Figure 3.1.3-1 (page 1 of 1)
Moderator Temperature Coefficient vs. Power Level

3.1 REACTIVITY CONTROL SYSTEMS

3.1.4 Rod Group Alignment Limits

LCO 3.1.4 All shutdown and control rods shall be OPERABLE.

AND

Individual indicated rod positions shall be within 12 steps of their group step counter demand position.

APPLICABILITY: MODES 1 and 2.

ACTIONS

| CONDITION | REQUIRED ACTION | COMPLETION TIME |
|-----------------------------------|--|-----------------|
| A. One or more rod(s) inoperable. | A.1.1 Verify SDM to be within the limits provided in the COLR. | 1 hour |
| | <u>OR</u> | |
| | A.1.2 Initiate boration to restore SDM to within limit. | 1 hour |
| | <u>AND</u> | |
| | A.2 Be in MODE 3. | 6 hours |

(continued)

ACTIONS (continued)

| CONDITION | REQUIRED ACTION | COMPLETION TIME |
|---|--|-------------------|
| B. One rod not within alignment limits. | B.1 Restore rod to within alignment limits. | 1 hour |
| | <u>OR</u> | |
| | B.2.1.1 Verify SDM to be within the limits provided in the COLR. | 1 hour |
| | <u>OR</u> | |
| | B.2.1.2 Initiate boration to restore SDM to within limit. | 1 hour |
| | <u>AND</u> | |
| | B.2.2 Reduce THERMAL POWER to $\leq 75\%$ RTP. | 2 hours |
| | <u>AND</u> | |
| | B.2.3 Verify SDM to be within the limits provided in the COLR. | Once per 12 hours |
| | <u>AND</u> | |
| | B.2.4 Perform SR 3.2.1.1 and SR 3.2.1.2 . | 72 hours |
| | <u>AND</u> | |
| | B.2.5 Perform SR 3.2.2.1 . | 72 hours |
| | <u>AND</u> | |
| | | (continued) |

ACTIONS

| CONDITION | REQUIRED ACTION | COMPLETION TIME |
|---|--|-----------------|
| B. (continued) | B.2.6 Re-evaluate safety analyses and confirm results remain valid for duration of operation under these conditions. | 5 days |
| C. Required Action and associated Completion Time of Condition B not met. | C.1 Be in MODE 3. | 6 hours |
| D. More than one rod not within alignment limit. | D.1.1 Verify SDM to be within the limits provided in the COLR. | 1 hour |
| | <u>OR</u> | |
| | D.1.2 Initiate boration to restore required SDM to within limit. | 1 hour |
| | <u>AND</u> | |
| | D.2 Be in MODE 3. | 6 hours |

SURVEILLANCE REQUIREMENTS

| SURVEILLANCE | | FREQUENCY |
|--------------|--|---|
| SR 3.1.4.1 | Verify individual rod positions within alignment limit. | In accordance with the Surveillance Frequency Control Program |
| SR 3.1.4.2 | Verify rod freedom of movement (trippability) by moving each rod not fully inserted in the core ≥ 10 steps in either direction. | In accordance with the Surveillance Frequency Control Program |
| SR 3.1.4.3 | <p>Verify rod drop time of each rod, from the fully withdrawn position, is ≤ 2.7 seconds from the beginning of decay of stationary gripper coil voltage to dashpot entry, with:</p> <ul style="list-style-type: none"> a. $T_{avg} \geq 500^{\circ}\text{F}$; and b. All reactor coolant pumps operating. | Prior to reactor criticality after each removal of the reactor head |

3.1 REACTIVITY CONTROL SYSTEMS

3.1.5 Shutdown Bank Insertion Limits

LCO 3.1.5 Each shutdown bank shall be within insertion limits specified in the COLR.

APPLICABILITY: MODE 1,
MODE 2 with any control bank not fully inserted.

----- NOTE -----
This LCO is not applicable while performing SR 3.1.4.2.

ACTIONS

| CONDITION | REQUIRED ACTION | COMPLETION TIME |
|--|--|-----------------|
| A. One or more shutdown banks not within limits. | A.1.1 Verify SDM to be within the limits provided in the COLR. | 1 hour |
| | <u>OR</u> | |
| | A.1.2 Initiate boration to restore SDM to within limit. | 1 hour |
| | <u>AND</u> | |
| | A.2 Restore shutdown banks to within limits. | 2 hours |
| B. Required Action and associated Completion Time not met. | B.1 Be in MODE 3. | 6 hours |

SURVEILLANCE REQUIREMENTS

| SURVEILLANCE | | FREQUENCY |
|--------------|---|---|
| SR 3.1.5.1 | Verify each shutdown bank is within the limits specified in the COLR. | In accordance with the Surveillance Frequency Control Program |

3.1 REACTIVITY CONTROL SYSTEMS

3.1.6 Control Bank Insertion Limits

LCO 3.1.6 Control banks shall be within the insertion, sequence, and overlap limits specified in the COLR.

APPLICABILITY: MODE 1,
MODE 2 with $k_{\text{eff}} \geq 1.0$.

----- NOTE -----
This LCO is not applicable while performing SR 3.1.4.2.

ACTIONS

| CONDITION | REQUIRED ACTION | COMPLETION TIME |
|---|--|-----------------|
| A. Control bank insertion limits not met. | A.1.1 Verify SDM to be within the limits provided in the COLR. | 1 hour |
| | <u>OR</u> | |
| | A.1.2 Initiate boration to restore SDM to within limit. | 1 hour |
| | <u>AND</u> | |
| | A.2 Restore control bank(s) to within limits. | 2 hours |

(continued)

ACTIONS (continued)

| CONDITION | REQUIRED ACTION | COMPLETION TIME |
|--|---|-----------------|
| B. Control bank sequence or overlap limits not met. | B.1.1 Verify SDM to be within the limits provided in the COLR. | 1 hour |
| | <u>OR</u> | |
| | B.1.2 Initiate boration to restore SDM to within limit. | 1 hour |
| | <u>AND</u> | |
| | B.2 Restore control bank sequence and overlap to within limits. | 2 hour |
| C. Required Action and associated Completion Time not met. | C.1 Be in MODE 3. | 6 hours |

SURVEILLANCE REQUIREMENTS

| SURVEILLANCE | | FREQUENCY |
|--------------|---|---|
| SR 3.1.6.1 | Verify estimated critical control bank position is within the limits specified in the COLR. | Within 4 hours prior to achieving criticality |
| SR 3.1.6.2 | Verify each control bank insertion is within the limits specified in the COLR. | In accordance with the Surveillance Frequency Control Program |

(continued)

SURVEILLANCE REQUIREMENTS (continued)

| SURVEILLANCE | | FREQUENCY |
|--------------|---|---|
| SR 3.1.6.3 | Verify sequence and overlap limits specified in the COLR are met for control banks not fully withdrawn from the core. | In accordance with the Surveillance Frequency Control Program |

3.1 REACTIVITY CONTROL SYSTEMS

3.1.7 Rod Position Indication

LCO 3.1.7 The Digital Rod Position Indication (DRPI) System and the Demand Position Indication System shall be OPERABLE.

APPLICABILITY: MODES 1 and 2.

ACTIONS

----- NOTE -----
Separate Condition entry is allowed for each inoperable rod position indicator and each demand position indicator.

| CONDITION | REQUIRED ACTION | COMPLETION TIME |
|--|---|------------------|
| A. One DRPI per group inoperable for one or more groups. | A.1 Verify the position of the rods with inoperable position indicators indirectly by using core power distribution measurement information. | Once per 8 hours |
| | <u>OR</u> A.2 Reduce THERMAL POWER to $\leq 50\%$ RTP. | 8 hour |

(continued)

ACTIONS (continued)

| CONDITION | REQUIRED ACTION | COMPLETION TIME |
|--|--|------------------|
| B. More than one DRPI per group inoperable for one or more groups. | B.1 Place the control rods under manual control. | Immediately |
| | <u>AND</u> | |
| | B.2 Monitor and record RCS T_{avg} . | Once per 1 hour |
| | <u>AND</u> | |
| | B.3 Verify the position of the rods with inoperable position indicators indirectly by using core power distribution measurement information. | Once per 8 hours |
| | <u>AND</u> | |
| | B.4 Restore inoperable position indicators to OPERABLE status such that a maximum of one DRPI per group is inoperable. | 24 hours |
| C. One or more rods with inoperable DRPIs have been moved in excess of 24 steps in one direction since the last determination of the rod's position. | C.1 Verify the position of the rods with inoperable position indicators indirectly by using core power distribution measurement information. | 4 hours |
| | <u>OR</u> | |
| | C.2 Reduce THERMAL POWER to $\leq 50\%$ RTP. | 8 hours |

(continued)

ACTIONS (continued)

| CONDITION | REQUIRED ACTION | COMPLETION TIME |
|---|---|------------------|
| D. One demand position indicator per bank inoperable for one or more banks. | D.1.1 Verify by administrative means all DRPIs for the affected banks are OPERABLE. | Once per 8 hours |
| | <u>AND</u> | |
| | D.1.2 Verify the most withdrawn rod and the least withdrawn rod of the affected banks are ≤ 12 steps apart. | Once per 8 hours |
| | <u>OR</u> | |
| | D.2 Reduce THERMAL POWER to $\leq 50\%$ RTP. | 8 hours |
| E. Required Action and associated Completion Time not met. | E.1 Be in MODE 3. | 6 hours |

SURVEILLANCE REQUIREMENTS

| SURVEILLANCE | | FREQUENCY |
|--------------|--|--|
| SR 3.1.7.1 | Verify each DRPI agrees within 12 steps of the group demand position for the full indicated range of rod travel. | Once prior to criticality after each removal of the reactor vessel head. |

3.1 REACTIVITY CONTROL SYSTEMS

3.1.8 PHYSICS TESTS Exceptions - MODE 2

- LCO 3.1.8 During the performance of PHYSICS TESTS, the requirements of
- LCO 3.1.3, "Moderator Temperature Coefficient (MTC)";
 LCO 3.1.4, "Rod Group Alignment Limits";
 LCO 3.1.5, "Shutdown Bank Insertion Limits";
 LCO 3.1.6, "Control Bank Insertion Limits"; and
 LCO 3.4.2, "RCS Minimum Temperature for Criticality"
- may be suspended, and the number of required channels for LCO 3.3.1, "RTS Instrumentation," Functions 2, 3, 6, and 18.e, may be reduced to 3 required channels provided:
- a. RCS lowest operating loop average temperature is $\geq 541^{\circ}\text{F}$;
 - b. SDM is within the limits specified in the COLR; and
 - c. THERMAL POWER is $\leq 5\%$ RTP.

APPLICABILITY: MODE 2 during PHYSICS TESTS.

ACTIONS.

| CONDITION | REQUIRED ACTION | COMPLETION TIME |
|---------------------------------------|--|-----------------|
| A. SDM not within limit. | A.1 Initiate boration to restore SDM to within limit. | 15 minutes |
| | <u>AND</u> A.2 Suspend PHYSICS TESTS exceptions. | 1 hour |
| B. THERMAL POWER not within limit. | B.1 Open reactor trip breakers. | Immediately |

(continued)

ACTIONS (continued)

| CONDITION | REQUIRED ACTION | COMPLETION TIME |
|---|--|-----------------|
| C. RCS lowest operating loop average temperature not within limit. | C.1 Restore RCS lowest operating loop average temperature to within limit. | 15 minutes |
| D. Required Action and associated Completion Time of Condition C not met. | D.1 Be in MODE 3. | 15 minutes |

SURVEILLANCE REQUIREMENTS

| SURVEILLANCE | | FREQUENCY |
|--------------|--|---|
| SR 3.1.8.1 | Perform a CHANNEL OPERATIONAL TEST on power range and intermediate range channels per SR 3.3.1.7, SR 3.3.1.8, and Table 3.3.1 1. | Prior to initiation of PHYSICS TESTS |
| SR 3.1.8.2 | Verify the RCS lowest operating loop average temperature is $\geq 541^{\circ}\text{F}$. | In accordance with the Surveillance Frequency Control Program |
| SR 3.1.8.3 | Verify THERMAL POWER is $\leq 5\%$ RTP. | In accordance with the Surveillance Frequency Control Program |

(continued)

SURVEILLANCE REQUIREMENTS (continued)

| SURVEILLANCE | | FREQUENCY |
|--------------|---|---|
| SR 3.1.8.4 | Verify SDM is within limits provided in the COLR. | In accordance with the Surveillance Frequency Control Program |

3.1 REACTIVITY CONTROL SYSTEMS

3.1.9 RCS Boron Limitations < 500°F

LCO 3.1.9 The boron concentration of the Reactor Coolant System (RCS) shall be greater than the all rods out (ARO) critical boron concentration.

APPLICABILITY: MODE 2 with $k_{eff} < 1.0$ with any RCS cold leg temperature < 500°F and with Rod Control System capable of rod withdrawal,
MODE 3 with any RCS cold leg temperature < 500°F and with Rod Control System capable of rod withdrawal,
MODES 4 and 5 with Rod Control System capable of rod withdrawal.

ACTIONS

| CONDITION | REQUIRED ACTION | | COMPLETION TIME |
|--|-----------------|---|-----------------|
| A. RCS boron concentration not within limit. | A.1 | Initiate boration to restore RCS boron concentration to within limit. | Immediately |
| | OR | | |
| | A.2 | Initiate action to place the Rod Control System in a condition incapable of rod withdrawal. | Immediately |
| | OR | | |
| | A.3 | <p>----- NOTE ----- Not applicable in MODES 4 and 5. -----</p> <p>Initiate action to increase all RCS cold leg temperatures to $\geq 500^\circ\text{F}$.</p> | Immediately |

SURVEILLANCE REQUIREMENTS

| SURVEILLANCE | | FREQUENCY |
|--------------|--|---|
| SR 3.1.9.1 | Verify RCS boron concentration is greater than the ARO critical boron concentration. | In accordance with the Surveillance Frequency Control Program |