



Exelon Generation®

Byron Generating Station

4450 North German Church Rd
Byron, IL 61010-9794

www.exeloncorp.com

September 28, 2021

LTR: BYRON 2021-0064
File: 2.01.0300 (5A.101)
1.10.0101 (1D.101)

United States Nuclear Regulatory Commission
ATTN: Document Control Desk
Washington, DC 20555-0001

Byron Station Unit 1
Renewed Facility Operating License No. NPF-37
NRC Docket No. STN 50-454

Subject: Byron Station Unit 1 Cycle 25 Core Operating Limits Report

In accordance with Technical Specification 5.6.5, "Core Operating Limits Report (COLR)," we are submitting the Unit 1 COLR, Revision 16, for Cycle 25.

Should you have any questions concerning this report, please contact Ms. Lisa Zurawski, Regulatory Assurance Manager, at (815) 406-2800.

Respectfully,

John J. Kowalski
Site Vice President
Byron Generating Station

Attachment: Byron Station Unit 1 Cycle 25, COLR, Revision 16

JJK/LZ/mf

cc: Regional Administrator – NRC Region III
NRC Senior Resident Inspector – Byron Station

CORE OPERATING LIMITS REPORT (COLR)

FOR

BYRON UNIT 1 CYCLE 25

EXELON TRACKING ID:

COLR BYRON UNIT 1 REVISION 16

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 1 CYCLE 25

1.0 CORE OPERATING LIMITS REPORT

This Core Operating Limits Report (COLR) for Byron Station Unit 1 Cycle 25 has been prepared in accordance with the requirements of Technical Specification 5.6.5 (ITS).

The Technical Specification Safety Limits and Limiting Conditions for Operation (LCOs) affected by this report are listed below:

SL	2.1.1	Reactor Core Safety Limits (SLs)
LCO	3.1.1	SHUTDOWN MARGIN (SDM)
LCO	3.1.3	Moderator Temperature Coefficient (MTC)
LCO	3.1.4	Rod Group Alignment Limits
LCO	3.1.5	Shutdown Bank Insertion Limits
LCO	3.1.6	Control Bank Insertion Limits
LCO	3.1.8	PHYSICS TESTS Exceptions – MODE 2
LCO	3.2.1	Heat Flux Hot Channel Factor ($F_Q(Z)$)
LCO	3.2.2	Nuclear Enthalpy Rise Hot Channel Factor ($F_{\Delta H}^N$)
LCO	3.2.3	AXIAL FLUX DIFFERENCE (AFD)
LCO	3.2.5	Departure from Nucleate Boiling Ratio (DNBR)
LCO	3.3.1	Reactor Trip System (RTS) Instrumentation
LCO	3.3.9	Boron Dilution Protection System (BDPS)
LCO	3.4.1	Reactor Coolant System (RCS) Pressure, Temperature, and Flow Departure from Nucleate Boiling (DNB) Limits
LCO	3.9.1	Boron Concentration

The portions of the Technical Requirements Manual (TRM) affected by this report are listed below:

TRM TLCO 3.1.b	Boration Flow Paths – Operating
TRM TLCO 3.1.d	Charging Pumps – Operating
TRM TLCO 3.1.f	Borated Water Sources – Operating
TRM TLCO 3.1.g	Position Indication System – Shutdown
TRM TLCO 3.1.h	Shutdown Margin (SDM) – MODE 1 and MODE 2 with $k_{eff} \geq 1.0$
TRM TLCO 3.1.i	Shutdown Margin (SDM) – MODE 5
TRM TLCO 3.1.j	Shutdown and Control Rods
TRM TLCO 3.1.k	Position Indication System – Shutdown (Special Test Exception)

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 1 CYCLE 25

2.0 OPERATING LIMITS

The cycle-specific parameter limits for the specifications listed in Section 1.0 are presented in the following subsections. These limits are applicable for the entire cycle unless otherwise identified. These limits have been developed using the NRC-approved methodologies specified in Technical Specification 5.6.5.

2.1 Reactor Core Safety Limits (SLs) (SL 2.1.1)

2.1.1 In MODES 1 and 2, the combination of Thermal Power, Reactor Coolant System (RCS) highest loop average temperature, and pressurizer pressure shall not exceed the limits specified in Figure 2.1.1.

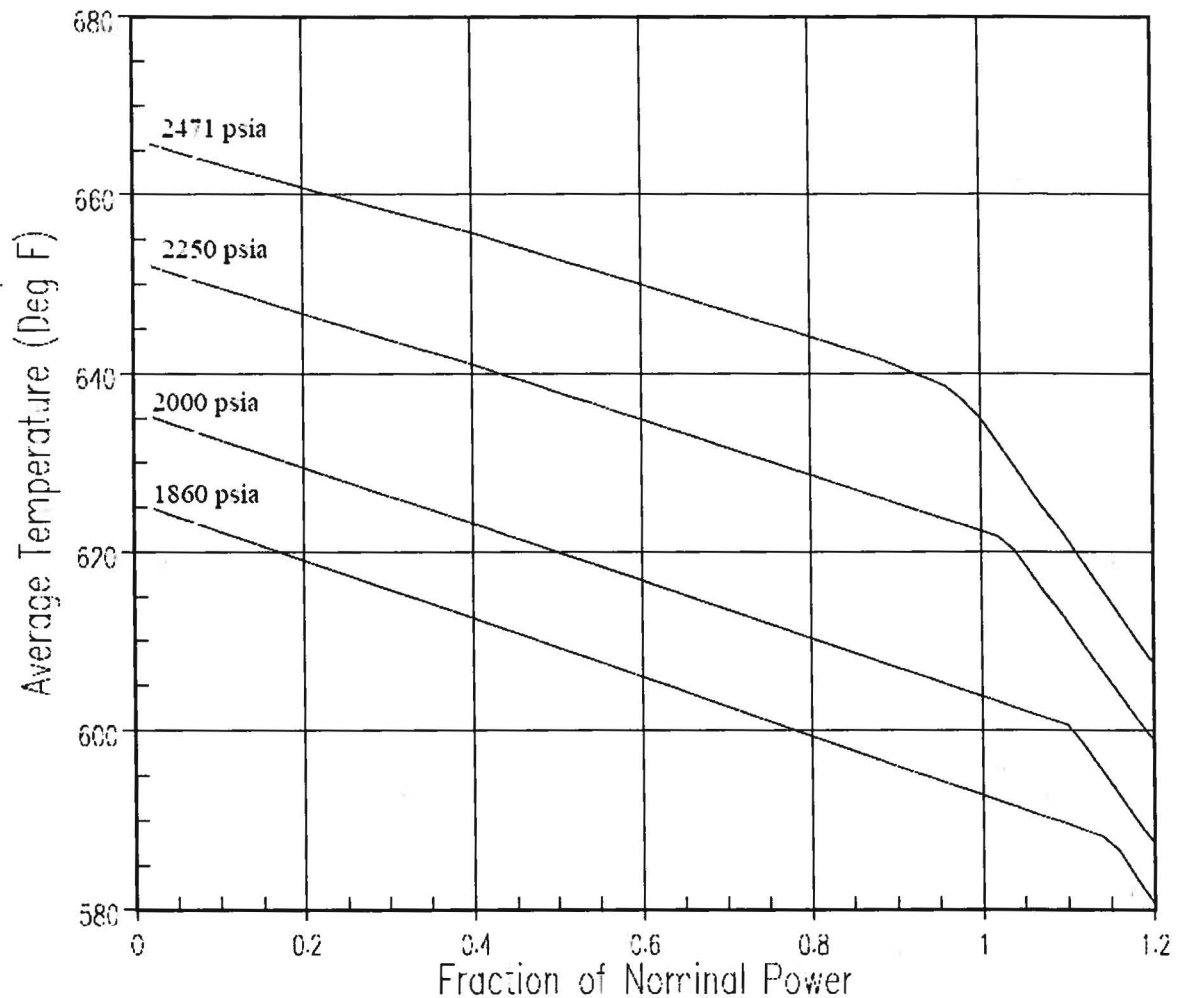


Figure 2.1.1: Reactor Core Limits

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 1 CYCLE 25

2.2 SHUTDOWN MARGIN (SDM)

The SDM limit for MODES 1, 2, 3, and 4 is:

2.2.1 The SDM shall be greater than or equal to 1.3% $\Delta k/k$ (LCOs 3.1.1, 3.1.4, 3.1.5, 3.1.6, 3.1.8, 3.3.9; TRM TLCOs 3.1.b, 3.1.d, 3.1.f, 3.1.h, and 3.1.j).

The SDM limit for MODE 5 is:

2.2.2 SDM shall be greater than or equal to 1.3% $\Delta k/k$ (LCO 3.1.1, LCO 3.3.9; TRM TLCOs 3.1.i and 3.1.j).

2.3 Moderator Temperature Coefficient (MTC) (LCO 3.1.3)

The Moderator Temperature Coefficient (MTC) limits are:

2.3.1 The BOL/ARO/HZP-MTC upper limit shall be $+2.087 \times 10^{-5} \Delta k/k/^{\circ}F$.

2.3.2 The EOL/ARO/HFP-MTC lower limit shall be $-4.6 \times 10^{-4} \Delta k/k/^{\circ}F$.

2.3.3 The EOL/ARO/HFP-MTC Surveillance limit at 300 ppm shall be $-3.7 \times 10^{-4} \Delta k/k/^{\circ}F$.

2.3.4 The EOL/ARO/HFP-MTC Surveillance limit at 60 ppm shall be $-4.3 \times 10^{-4} \Delta k/k/^{\circ}F$.

where: BOL stands for Beginning of Cycle Life
ARO stands for All Rods Out
HZP stands for Hot Zero Thermal Power
EOL stands for End of Cycle Life
HFP stands for Hot Full Thermal Power

2.4 Shutdown Bank Insertion Limits (LCO 3.1.5)

2.4.1 All shutdown banks shall be fully withdrawn to at least 224 steps.

2.5 Control Bank Insertion Limits (LCO 3.1.6)

2.5.1 The control banks, with Bank A greater than or equal to 224 steps, shall be limited in physical insertion as shown in Figure 2.5.1.

2.5.2 Each control bank shall be considered fully withdrawn from the core at greater than or equal to 224 steps.


2.5.3 The control banks shall be operated in sequence by withdrawal of Bank A, Bank B, Bank C and Bank D. The control banks shall be sequenced in reverse order upon insertion.

2.5.4 Each control bank not fully withdrawn from the core shall be operated with the following overlap limits as a function of park position:

Park Position (step)	Overlap Limit (step)
228	113

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 1 CYCLE 25

Figure 2.5.1:
Control Bank Insertion Limits Versus Percent Rated Thermal Power

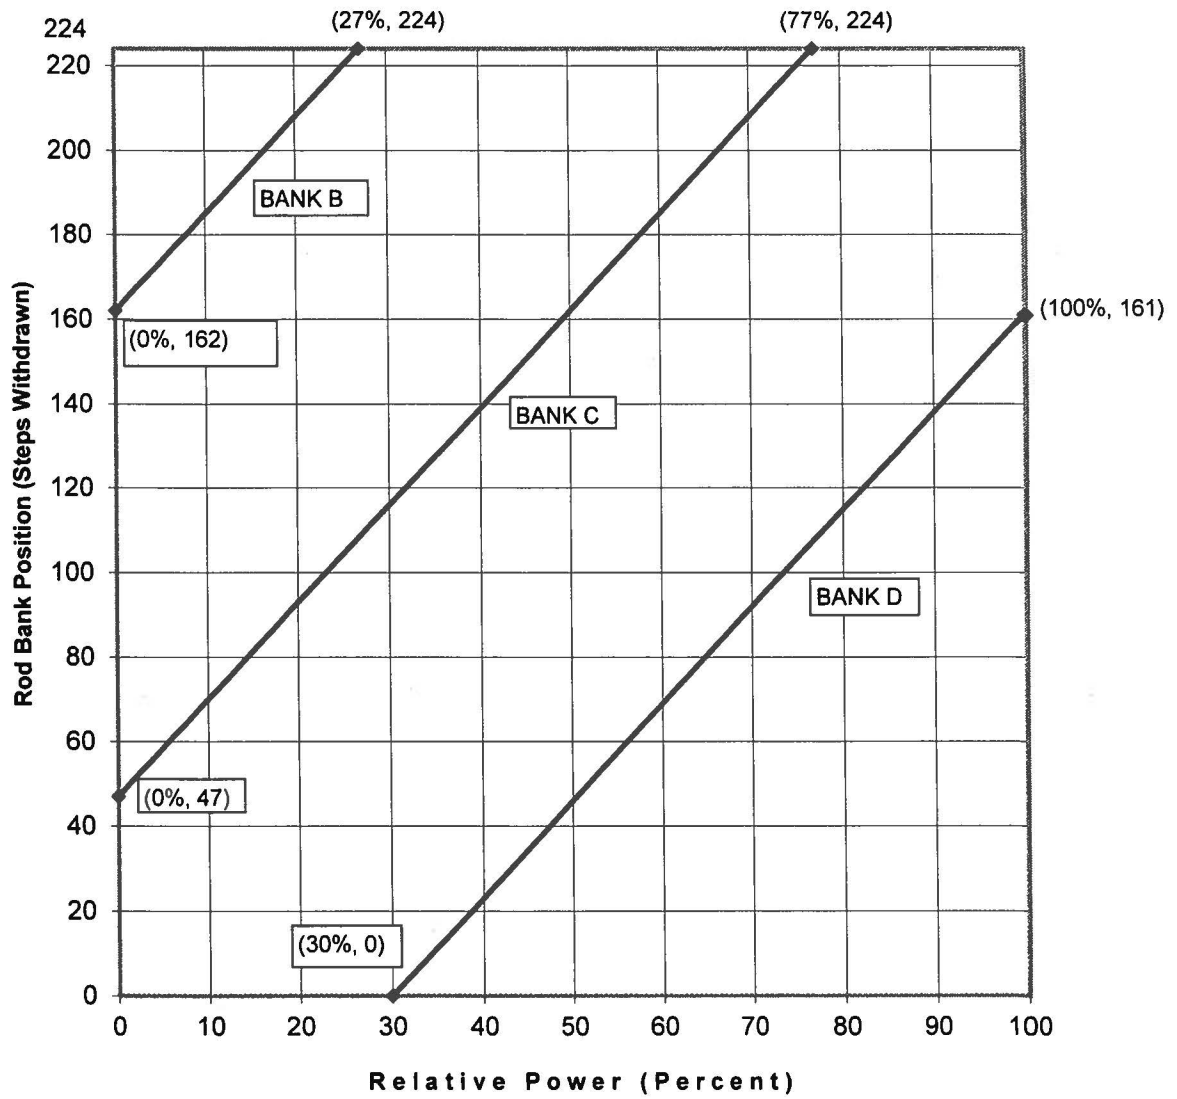

The bank position is given as follows:

Control Bank D: $(161/70) * (P-100) + 161$ (for $30 \leq P \leq 100$)

Where P is defined as the core power (in percent).

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 1 CYCLE 25

2.6 Heat Flux Hot Channel Factor ($F_Q(Z)$) (LCO 3.2.1)

2.6.1 Total Peaking Factor:

$$F_Q(Z) \leq \frac{F_Q^{RTP}}{0.5} \times K(Z) \text{ for } P \leq 0.5$$


$$F_Q(Z) \leq \frac{F_Q^{RTP}}{P} \times K(Z) \text{ for } P > 0.5$$

where: P = the ratio of THERMAL POWER to RATED THERMAL POWER

$$F_Q^{RTP} = 2.60$$

$K(Z)$ is provided in Figure 2.6.1.

Figure 2.6.1
 $K(Z)$ - Normalized $F_Q(Z)$ as a Function of Core Height

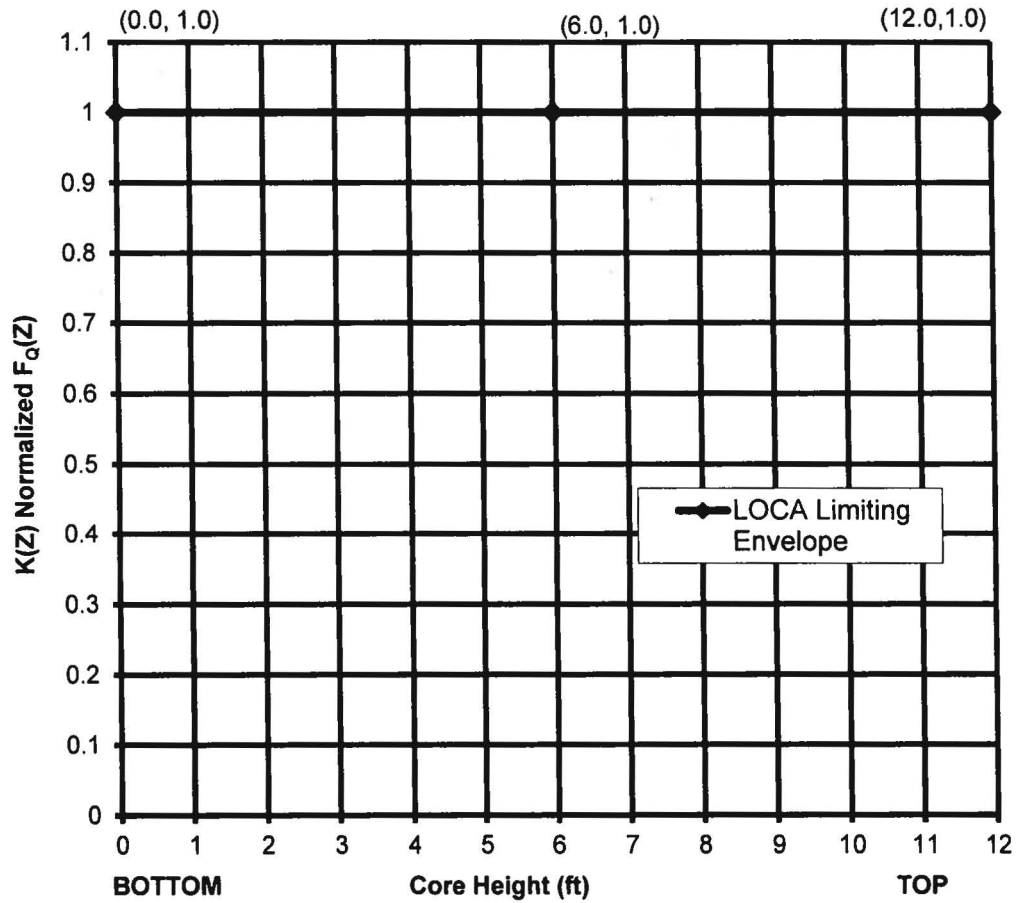

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 1 CYCLE 25

2.6.2 W(Z) Values:

a) When the Power Distribution Monitoring System (PDMS) is OPERABLE,
 $W(Z) = 1.00000$ for all axial points.

b) When PDMS is inoperable, $W(Z)$ is provided as:

- 1) Table 2.6.2.a are the normal operation $W(Z)$ values that correspond to the NORMAL AXIAL FLUX DIFFERENCE (AFD) Acceptable Operation Limits provided in Figure 2.8.1.a. The Normal AFD Acceptable Operation Limits may be invoked at any time and must be used with the corresponding $W(Z)$ values.
- 2) Table 2.6.2.b are the Expanded normal operation $W(Z)$ values that correspond to the EXPANDED AXIAL FLUX DIFFERENCE (AFD) Acceptable Operation Limits provided in Figure 2.8.1.b. The Expanded AFD Acceptable Operation Limits may be invoked at any time and must be used with the corresponding $W(Z)$ values.

Table 2.6.2.c shows the $F_{Q(z)}$ penalty factors that are greater than 2% per the allowable surveillance frequency. These values shall be used to increase the $F_{Q(z)}$ as per Surveillance Requirement 3.2.1.2. A 2% penalty factor shall be used at all cycle burnups that are outside the range of Table 2.6.2.c.

2.6.3 Uncertainty:

The uncertainty, U_{FQ} , to be applied to the Heat Flux Hot Channel Factor $F_Q(Z)$ shall be calculated by the following formula

$$U_{FQ} = U_{qu} \bullet U_e$$

where:

U_{qu} = Base F_Q measurement uncertainty = 1.05 when PDMS is inoperable
(U_{qu} is defined by PDMS when OPERABLE.)
 U_e = Engineering uncertainty factor = 1.03

2.6.4 PDMS Alarms:

$F_Q(Z)$ Warning Setpoint = 2% $F_Q(Z)$ Margin
 $F_Q(Z)$ Alarm Setpoint = 0% $F_Q(Z)$ Margin

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 1 CYCLE 25

Height (feet)	150 MWD/MTU	4000 MWD/MTU	14000 MWD/MTU	20000 MWD/MTU
0.00 (core bottom)	1.2638	1.3837	1.2311	1.2018
0.20	1.2570	1.3723	1.2249	1.1946
0.40	1.2571	1.3673	1.2299	1.1968
0.60	1.2611	1.3664	1.2360	1.2045
0.80	1.2698	1.3685	1.2484	1.2188
1.00	1.2691	1.3604	1.2515	1.2239
1.20	1.2598	1.3447	1.2450	1.2183
1.40	1.2464	1.3248	1.2348	1.2089
1.60	1.2325	1.3035	1.2245	1.1999
1.80	1.2174	1.2806	1.2133	1.1903
2.00	1.2010	1.2562	1.2008	1.1796
2.20	1.1836	1.2307	1.1875	1.1681
2.40	1.1659	1.2050	1.1739	1.1563
2.60	1.1485	1.1797	1.1604	1.1445
2.80	1.1314	1.1554	1.1477	1.1332
3.00	1.1262	1.1363	1.1371	1.1199
3.20	1.1259	1.1275	1.1315	1.1136
3.40	1.1253	1.1273	1.1314	1.1175
3.60	1.1243	1.1258	1.1303	1.1288
3.80	1.1230	1.1238	1.1302	1.1411
4.00	1.1207	1.1214	1.1335	1.1531
4.20	1.1191	1.1183	1.1385	1.1644
4.40	1.1194	1.1147	1.1424	1.1747
4.60	1.1198	1.1109	1.1457	1.1838
4.80	1.1203	1.1103	1.1481	1.1914
5.00	1.1215	1.1106	1.1496	1.1974
5.20	1.1223	1.1104	1.1499	1.2017
5.40	1.1226	1.1097	1.1496	1.2040
5.60	1.1259	1.1092	1.1496	1.2049
5.80	1.1310	1.1106	1.1497	1.2119
6.00	1.1396	1.1147	1.1533	1.2251
6.20	1.1526	1.1194	1.1646	1.2394
6.40	1.1662	1.1227	1.1736	1.2505
6.60	1.1784	1.1239	1.1827	1.2590
6.80	1.1891	1.1327	1.1905	1.2647
7.00	1.1981	1.1456	1.1961	1.2675
7.20	1.2051	1.1555	1.1998	1.2674
7.40	1.2102	1.1642	1.2014	1.2642
7.60	1.2132	1.1715	1.2008	1.2583
7.80	1.2124	1.1755	1.1980	1.2479
8.00	1.2138	1.1821	1.1928	1.2393
8.20	1.2202	1.1942	1.1873	1.2357
8.40	1.2246	1.2050	1.1856	1.2302
8.60	1.2315	1.2185	1.1835	1.2291
8.80	1.2391	1.2354	1.1854	1.2284
9.00	1.2497	1.2590	1.1940	1.2248
9.20	1.2615	1.2879	1.2069	1.2232
9.40	1.2675	1.3114	1.2209	1.2334
9.60	1.2964	1.3347	1.2343	1.2481
9.80	1.3326	1.3555	1.2492	1.2666
10.00	1.3638	1.3717	1.2648	1.2866
10.20	1.3932	1.3901	1.2778	1.3038
10.40	1.4172	1.4183	1.2879	1.3184
10.60	1.4372	1.4435	1.2954	1.3301
10.80	1.4557	1.4666	1.3001	1.3400
11.00	1.4785	1.4937	1.3060	1.3474
11.20	1.4840	1.5027	1.3022	1.3409
11.40	1.4158	1.4480	1.2604	1.3002
11.60	1.3527	1.4091	1.2170	1.2545
11.80	1.3468	1.4067	1.1938	1.2328
12.00 (core top)	1.3258	1.4033	1.2043	1.2568

Note: W(Z) values at 20000 MWD/MTU may be applied to cycle burnups greater than 20000 MWD/MTU to prevent W(Z) function extrapolation

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 1 CYCLE 25

Table 2.6.2.b

W(Z) versus Core Height for Expanded AFD Acceptable Operation Limits in Figure 2.8.1.b
(Top and Bottom 8% Excluded per Byron SR 3.2.1.2 Bases)

Height (feet)	150 MWD/MTU	4000 MWD/MTU	14000 MWD/MTU	20000 MWD/MTU
0.00 (core bottom)	1.3688	1.4875	1.3086	1.3096
0.20	1.3603	1.4742	1.3026	1.3005
0.40	1.3603	1.4679	1.3048	1.3014
0.60	1.3623	1.4660	1.3117	1.3083
0.80	1.3701	1.4670	1.3239	1.3221
1.00	1.3675	1.4571	1.3261	1.3257
1.20	1.3559	1.4393	1.3183	1.3180
1.40	1.3398	1.4169	1.3064	1.3060
1.60	1.3229	1.3931	1.2942	1.2942
1.80	1.3045	1.3674	1.2808	1.2814
2.00	1.2843	1.3398	1.2657	1.2672
2.20	1.2629	1.3111	1.2498	1.2519
2.40	1.2410	1.2820	1.2329	1.2359
2.60	1.2196	1.2531	1.2154	1.2194
2.80	1.2001	1.2257	1.2053	1.2034
3.00	1.1904	1.2005	1.2005	1.1841
3.20	1.1877	1.1827	1.1964	1.1762
3.40	1.1829	1.1755	1.1917	1.1834
3.60	1.1777	1.1704	1.1865	1.1908
3.80	1.1721	1.1652	1.1802	1.1972
4.00	1.1651	1.1613	1.1781	1.2034
4.20	1.1589	1.1582	1.1784	1.2084
4.40	1.1555	1.1541	1.1775	1.2122
4.60	1.1514	1.1494	1.1757	1.2147
4.80	1.1464	1.1440	1.1730	1.2151
5.00	1.1411	1.1379	1.1690	1.2156
5.20	1.1347	1.1311	1.1641	1.2157
5.40	1.1284	1.1235	1.1588	1.2139
5.60	1.1284	1.1151	1.1556	1.2154
5.80	1.1301	1.1131	1.1591	1.2250
6.00	1.1386	1.1147	1.1709	1.2391
6.20	1.1535	1.1194	1.1831	1.2519
6.40	1.1675	1.1232	1.1931	1.2617
6.60	1.1801	1.1304	1.2027	1.2687
6.80	1.1913	1.1382	1.2109	1.2727
7.00	1.2007	1.1464	1.2167	1.2737
7.20	1.2082	1.1557	1.2204	1.2715
7.40	1.2137	1.1638	1.2217	1.2663
7.60	1.2171	1.1709	1.2206	1.2582
7.80	1.2172	1.1755	1.2174	1.2456
8.00	1.2185	1.1823	1.2109	1.2350
8.20	1.2253	1.1937	1.2039	1.2291
8.40	1.2301	1.2046	1.2021	1.2213
8.60	1.2377	1.2181	1.1993	1.2222
8.80	1.2447	1.2354	1.2024	1.2267
9.00	1.2487	1.2597	1.2127	1.2310
9.20	1.2513	1.2885	1.2227	1.2334
9.40	1.2575	1.3119	1.2345	1.2315
9.60	1.2827	1.3353	1.2418	1.2374
9.80	1.3130	1.3559	1.2479	1.2542
10.00	1.3399	1.3721	1.2522	1.2740
10.20	1.3653	1.3903	1.2527	1.2909
10.40	1.3859	1.4182	1.2575	1.3050
10.60	1.4026	1.4433	1.2681	1.3164
10.80	1.4202	1.4661	1.2781	1.3259
11.00	1.4384	1.4930	1.2867	1.3330
11.20	1.4364	1.5018	1.2839	1.3264
11.40	1.3747	1.4469	1.2473	1.2859
11.60	1.3203	1.4078	1.2075	1.2405
11.80	1.3191	1.4053	1.1890	1.2190
12.00 (core top)	1.3059	1.4016	1.2081	1.2424

Note: W(Z) values at 20000 MWD/MTU may be applied to cycle burnups greater than 20000 MWD/MTU to prevent W(Z) function extrapolation

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 1 CYCLE 25

Table 2.6.2.c Penalty Factors in Excess of 2%	
Cycle Burnup (MWD/MTU)	Penalty Factor $F^c_q(z)$
0	1.0200
150	1.0750
371	1.0820
592	1.0830
842	1.0800
1033	1.0760
2137	1.0290
2578	1.0200
6111	1.0200
6532	1.0280
7214	1.0345
7656	1.0320
8098	1.0200
8981	1.0200
9201	1.0225
9643	1.0209
10084	1.0200
10747	1.0200
11188	1.0210
11409	1.0200

Notes:

Linear interpolation is adequate for intermediate cycle burnups.

All cycle burnups outside the range of Table 2.6.2.c (11409 MWD/MTU and over) shall use a 2% penalty factor for compliance with the 3.2.1.2 Surveillance Requirements.

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 1 CYCLE 25

2.7 Nuclear Enthalpy Rise Hot Channel Factor ($F_{\Delta H}^N$) (LCO 3.2.2)

2.7.1 $F_{\Delta H}^N \leq F_{\Delta H}^{RTP} [1.0 + PF_{\Delta H}(1.0 - P)]$

where: P = the ratio of THERMAL POWER to RATED THERMAL POWER (RTP)

$$F_{\Delta H}^{RTP} = 1.70$$

$$PF_{\Delta H} = 0.3$$

2.7.2 Uncertainty:

The uncertainty, $U_{F\Delta H}$, to be applied to the Nuclear Enthalpy Rise Hot Channel Factor $F_{\Delta H}^N$ shall be calculated by the following formula:

$$U_{F\Delta H} = U_{F\Delta Hm}$$

where:

$$U_{F\Delta Hm} = \text{Base } F_{\Delta H}^N \text{ measurement uncertainty} = 1.04 \text{ when PDMS is inoperable} \\ (U_{F\Delta Hm} \text{ is defined by PDMS and cannot be less than 1.04 when OPERABLE.)}$$

2.7.3 PDMS Alarms:

$$F_{\Delta H}^N \text{ Warning Setpoint} = 2\% F_{\Delta H}^N \text{ Margin}$$

$$F_{\Delta H}^N \text{ Alarm Setpoint} = 0\% F_{\Delta H}^N \text{ Margin}$$

2.8 AXIAL FLUX DIFFERENCE (AFD) (LCO 3.2.3)

2.8.1 The AXIAL FLUX DIFFERENCE (AFD) Acceptable Operation Limits are provided in the Figures described below.

- a) Figure 2.8.1.a is the Normal AFD Acceptable Operation Limits associated with the W(Z) values in Table 2.6.2.a. Prior to changing to Figure 2.8.1.a, confirm that the plant is within the specified AFD envelope.
- b) Figure 2.8.1.b is the Expanded AFD Acceptable Operation Limits associated with the W(Z) values in Table 2.6.2.b.

2.9 Departure from Nucleate Boiling Ratio (DNBR) (LCO 3.2.5)

2.9.1 $DNBR_{APSL} \geq 1.563$

The Axial Power Shape Limiting DNBR ($DNBR_{APSL}$) is applicable with THERMAL POWER $\geq 50\%$ RTP when PDMS is OPERABLE.


2.9.2 PDMS Alarms:

$$DNBR \text{ Warning Setpoint} = 2\% DNBR \text{ Margin}$$

$$DNBR \text{ Alarm Setpoint} = 0\% DNBR \text{ Margin}$$


CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 1 CYCLE 25

Figure 2.8.1.a:
Normal Axial Flux Difference Limits
as a Function of Rated Thermal Power

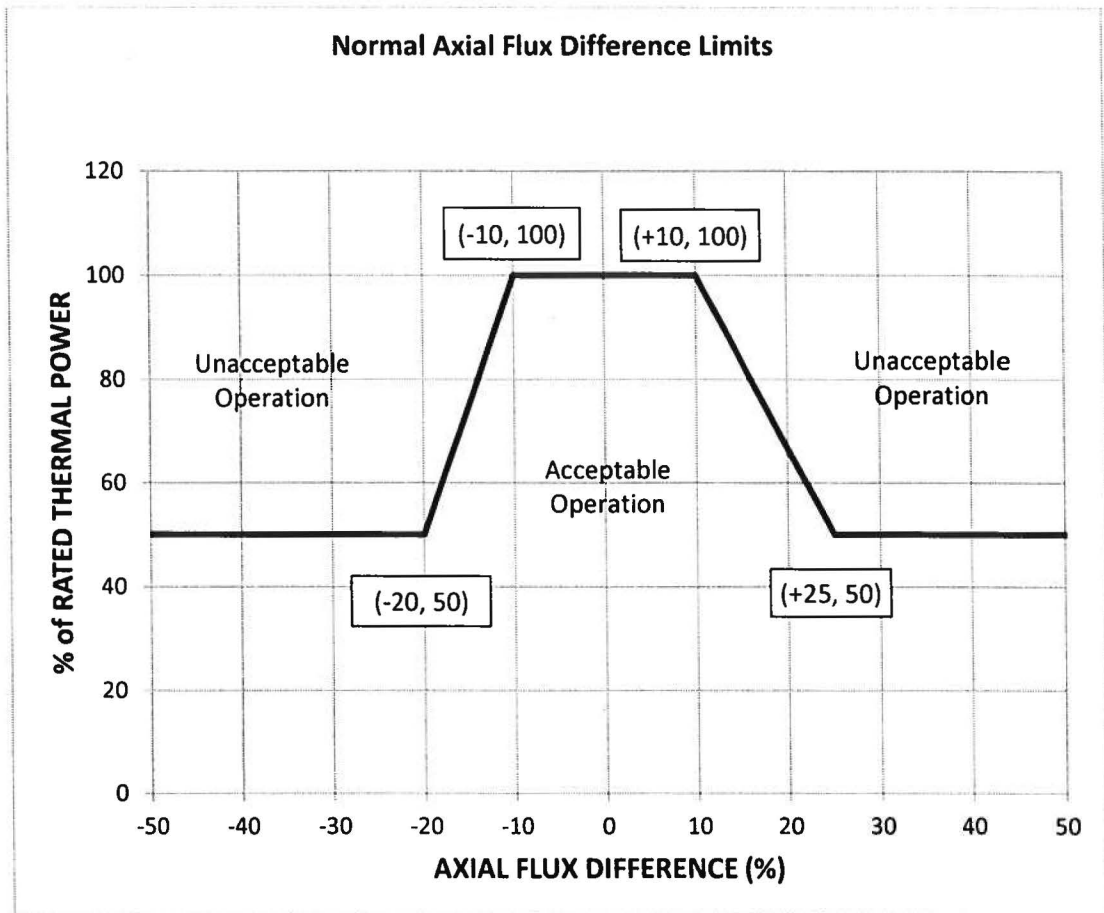

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 1 CYCLE 25

Figure 2.8.1.b:
Expanded Axial Flux Difference Limits
as a Function of Rated Thermal Power

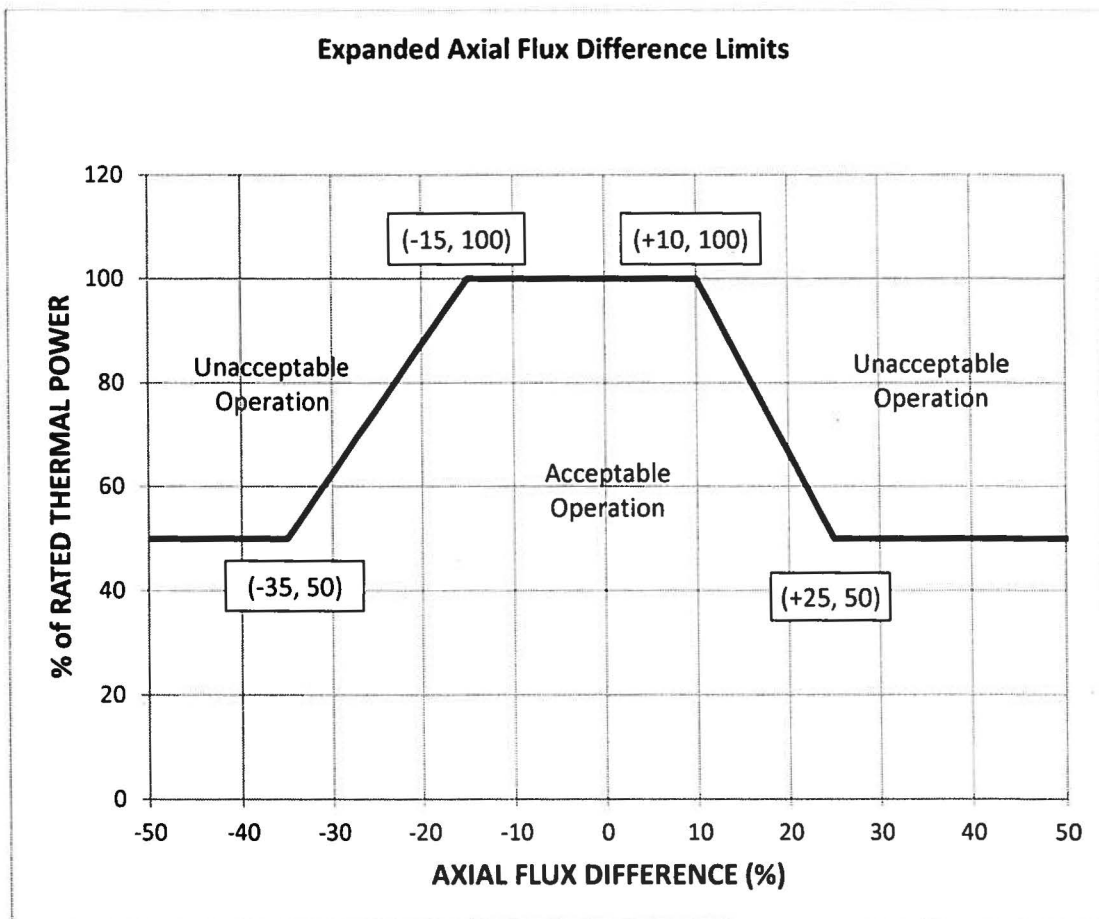

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 1 CYCLE 25

2.10 Reactor Trip System (RTS) Instrumentation (LCO 3.3.1) - Overtemperature ΔT Setpoint Parameter Values

- 2.10.1 The Overtemperature ΔT reactor trip setpoint K_1 shall be equal to 1.325.
- 2.10.2 The Overtemperature ΔT reactor trip setpoint T_{avg} coefficient K_2 shall be equal to 0.0297 / °F.
- 2.10.3 The Overtemperature ΔT reactor trip setpoint pressure coefficient K_3 shall be equal to 0.00135 / psi.
- 2.10.4 The nominal T_{avg} at RTP (indicated) T' shall be less than or equal to 588.0 °F.
- 2.10.5 The nominal RCS operating pressure (indicated) P' shall be equal to 2235 psig.
- 2.10.6 The measured reactor vessel ΔT lead/lag time constant τ_1 shall be equal to 8 sec.
- 2.10.7 The measured reactor vessel ΔT lead/lag time constant τ_2 shall be equal to 3 sec.
- 2.10.8 The measured reactor vessel ΔT lag time constant τ_3 shall be less than or equal to 2 sec.
- 2.10.9 The measured reactor vessel average temperature lead/lag time constant τ_4 shall be equal to 33 sec.
- 2.10.10 The measured reactor vessel average temperature lead/lag time constant τ_5 shall be equal to 4 sec.
- 2.10.11 The measured reactor vessel average temperature lag time constant τ_6 shall be less than or equal to 2 sec.
- 2.10.12 The $f_1(\Delta I)$ "positive" breakpoint shall be +10% ΔI .
- 2.10.13 The $f_1(\Delta I)$ "negative" breakpoint shall be -18% ΔI .
- 2.10.14 The $f_1(\Delta I)$ "positive" slope shall be +3.47% / % ΔI .
- 2.10.15 The $f_1(\Delta I)$ "negative" slope shall be -2.61% / % ΔI .

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 1 CYCLE 25

- 2.11 Reactor Trip System (RTS) Instrumentation (LCO 3.3.1) - Overpower ΔT Setpoint Parameter Values
- 2.11.1 The Overpower ΔT reactor trip setpoint K_4 shall be equal to 1.072.
 - 2.11.2 The Overpower ΔT reactor trip setpoint T_{avg} rate/lag coefficient K_5 shall be equal to 0.02 / °F for increasing T_{avg} .
 - 2.11.3 The Overpower ΔT reactor trip setpoint T_{avg} rate/lag coefficient K_5 shall be equal to 0 / °F for decreasing T_{avg} .
 - 2.11.4 The Overpower ΔT reactor trip setpoint T_{avg} heatup coefficient K_6 shall be equal to 0.00245 / °F when $T > T''$.
 - 2.11.5 The Overpower ΔT reactor trip setpoint T_{avg} heatup coefficient K_6 shall be equal to 0 / °F when $T \leq T''$.
 - 2.11.6 The nominal T_{avg} at RTP (indicated) T'' shall be less than or equal to 588.0 °F.
 - 2.11.7 The measured reactor vessel ΔT lead/lag time constant τ_1 shall be equal to 8 sec.
 - 2.11.8 The measured reactor vessel ΔT lead/lag time constant τ_2 shall be equal to 3 sec.
 - 2.11.9 The measured reactor vessel ΔT lag time constant τ_3 shall be less than or equal to 2 sec.
 - 2.11.10 The measured reactor vessel average temperature lag time constant τ_6 shall be less than or equal to 2 sec.
 - 2.11.11 The measured reactor vessel average temperature rate/lag time constant τ_7 shall be equal to 10 sec.
 - 2.11.12 The $f_2(\Delta I)$ "positive" breakpoint shall be 0 for all ΔI .
 - 2.11.13 The $f_2(\Delta I)$ "negative" breakpoint shall be 0 for all ΔI .
 - 2.11.14 The $f_2(\Delta I)$ "positive" slope shall be 0 for all ΔI .
 - 2.11.15 The $f_2(\Delta I)$ "negative" slope shall be 0 for all ΔI .

CORE OPERATING LIMITS REPORT (COLR) for BYRON UNIT 1 CYCLE 25

2.12 Reactor Coolant System (RCS) Pressure, Temperature, and Flow Departure from Nucleate Boiling (DNB) Limits (LCO 3.4.1)

2.12.1 The pressurizer pressure shall be greater than or equal to 2209 psig.

2.12.2 The RCS average temperature (T_{avg}) shall be less than or equal to 593.1 °F.

2.12.3 The RCS total flow rate shall be greater than or equal to 386,000 gpm.

2.13 Boron Concentration

2.13.1 The refueling boron concentration shall be greater than or equal to the applicable value given in the Table below (LCO 3.9.1). The reported "prior to initial criticality" value also bounds the end-of-cycle requirements for the previous cycle.

2.13.2 To maintain $keff \leq 0.987$ with all shutdown and control rods fully withdrawn in MODES 3, 4, or 5 (TRM TLCO 3.1.g Required Action B.2 and TRM TLCO 3.1.k.2), the Reactor Coolant System boron concentration shall be greater than or equal to the applicable value given in the Table below.

COLR Section	Conditions	Boron Concentration (ppm)
2.13.1	a) prior to initial criticality	1753
	b) for cycle burnups ≥ 0 MWD/MTU and < 16000 MWD/MTU	1895
	c) for cycle burnups ≥ 16000 MWD/MTU	1491
2.13.2	a) prior to initial criticality	1821
	b) for cycle burnups ≥ 0 MWD/MTU and < 16000 MWD/MTU	2117
	c) for cycle burnups ≥ 16000 MWD/MTU	1621