Appendix 3.5.4

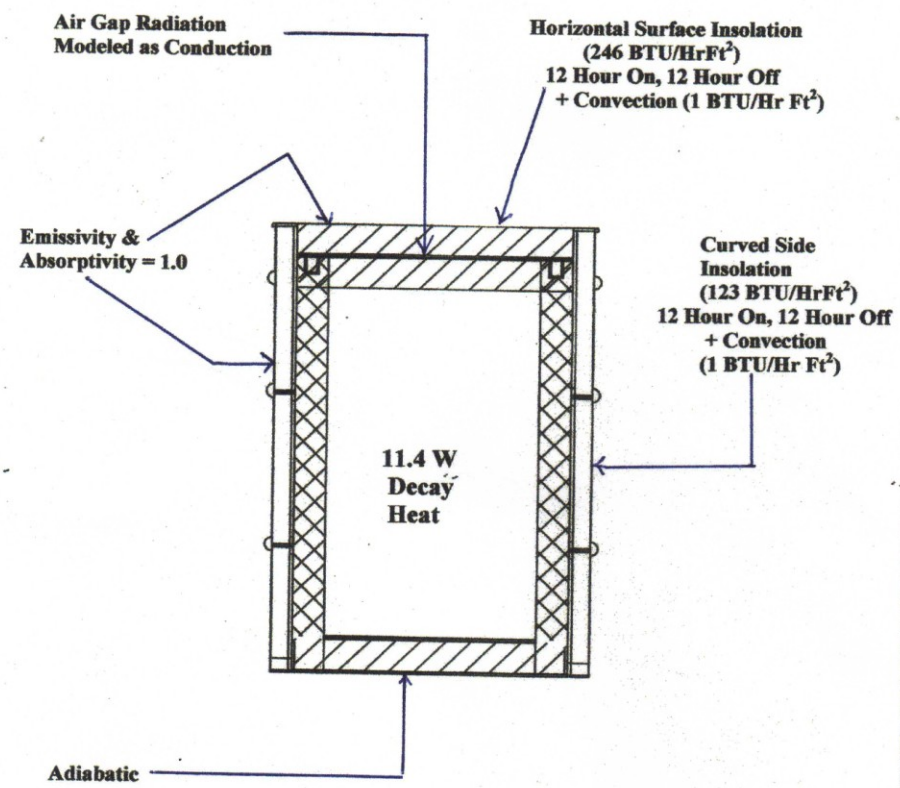

NCT

Package is Modeled Using Conduction Only. ¼ Symmetry, All Brick Elements.
Default Node Temperature = 100°F

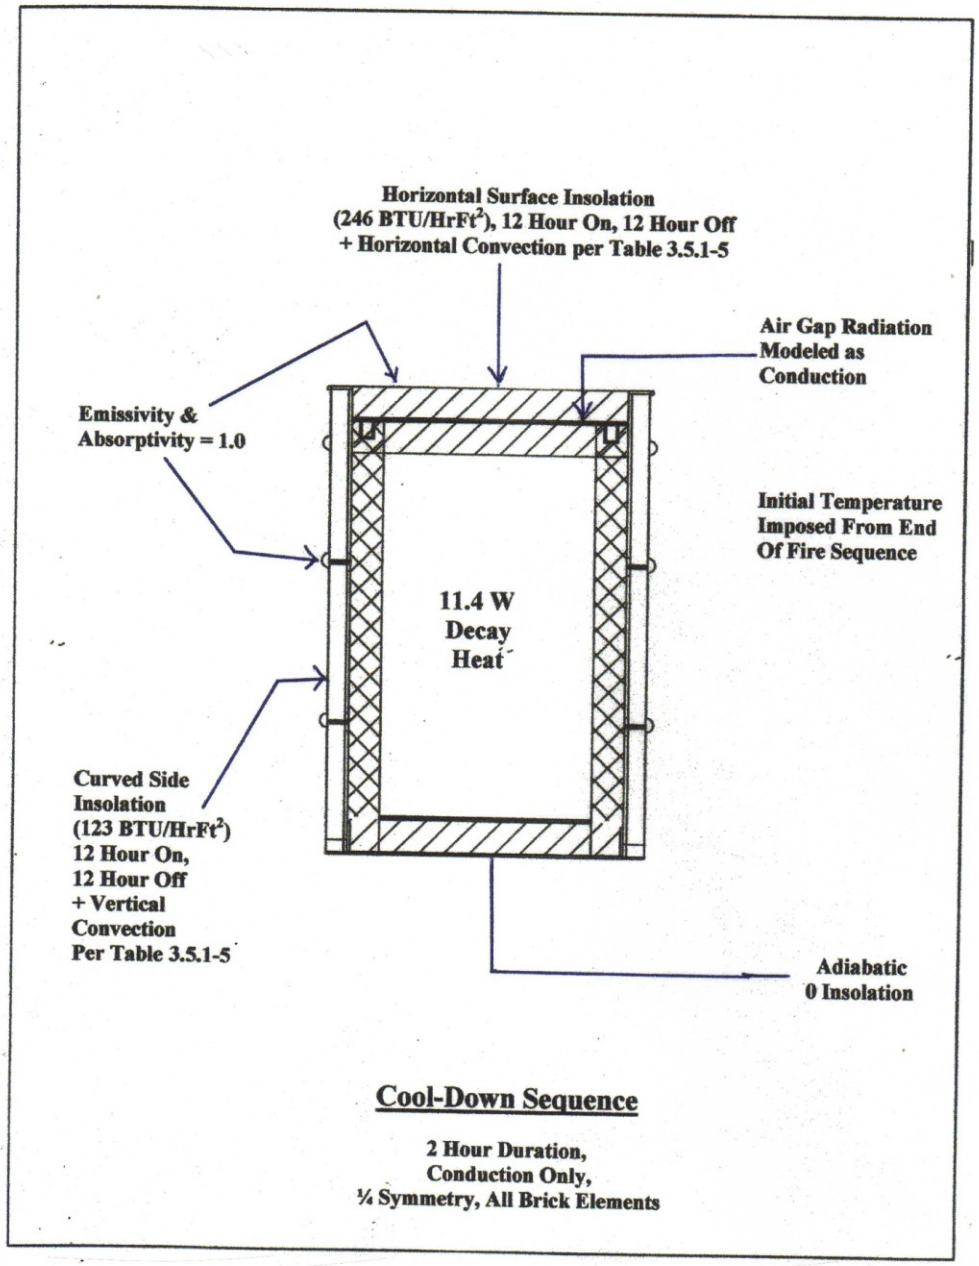

Cool-Down Sequence

2 Hour Duration,
Conduction Only,
¼ Symmetry, All Brick Elements

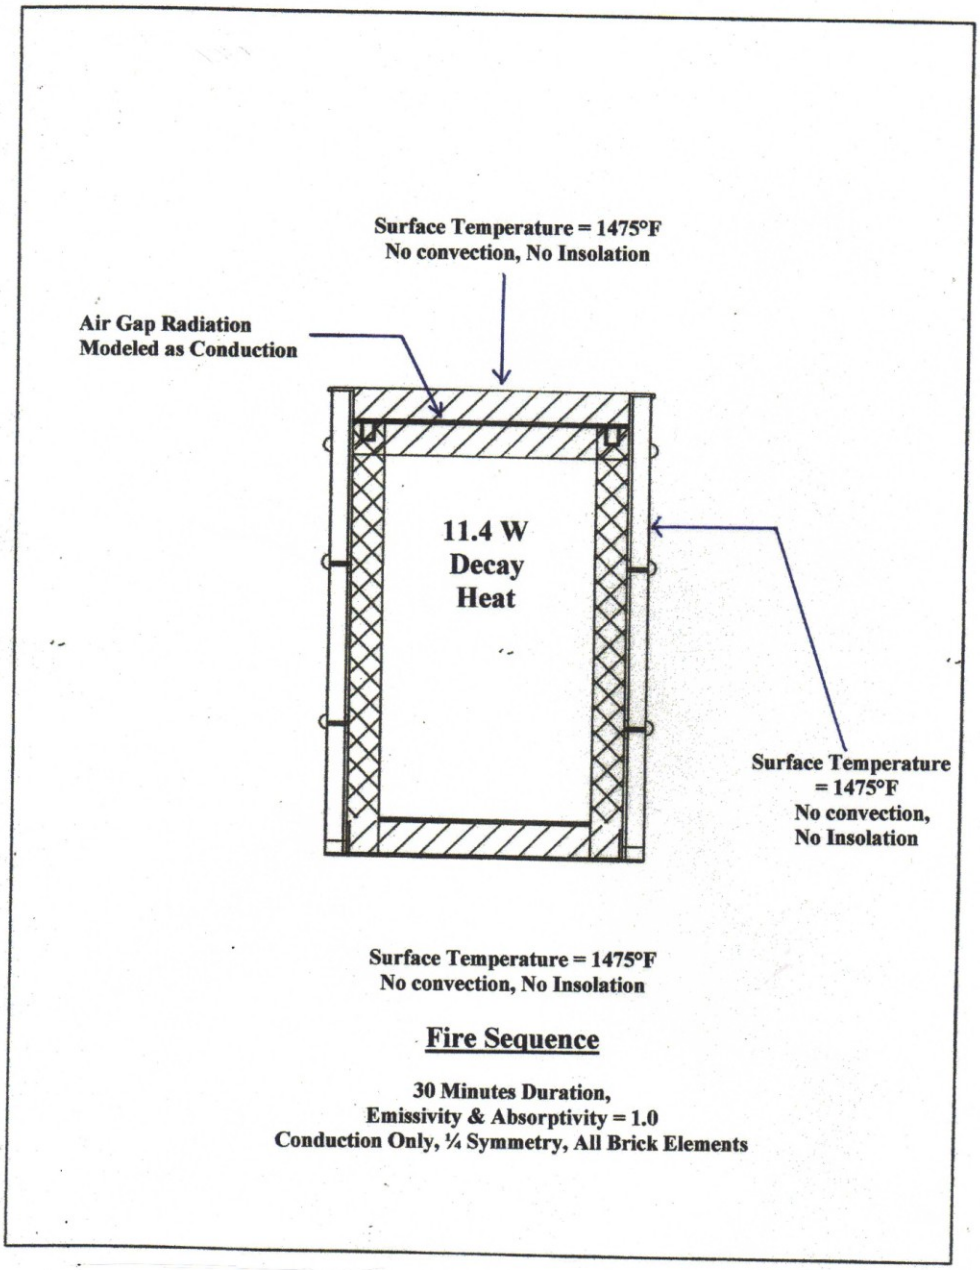

Fire Sequence

30 Minutes Duration,
Emissivity & Absorptivity = 1.0
Conduction Only, ¼ Symmetry, All Brick Elements