Mo-99 Production Using a Superconducting Electron Linac

Terry L. Grimm, Jerry L. Hollister, Stephen A. Klass,
Erik S. Maddock, Mark P. Sinila, Valeriia N. Starovoitova
Niowave, Inc.
Lansing MI

Meeting at NRC Headquarters, Rockville MD
Submitted July 17, 2014

NIOWAVE
www.niowaveinc.com

Outline

NIOWAVE
www.niowaveinc.com

- Key personnel
- Superconducting electron linacs & their applications
- Photonuclear isotope production
  - Research isotopes (DOE Isotope Program)
  - Mo-99 (commercial market)
- Mo-99 production rates
- Mo-99 recovery
- NRC & state licenses
- Niowave headquarters – prototype & commission
- Niowave airport facility – production & distribution

Key Personnel

Dr. Terry Grimm
President & Senior Scientist
- PhD Nuclear Engineering, MIT
- Founded Niowave in 2005
- Over 25 years experience in superconducting accelerators

Dr. Valeriia Starovoitova
Nuclear Physicist
- PhD Nuclear Physics, Purdue
- Researcher at Idaho Accelerator Center
- Over 10 years experience in nuclear physics

Erik Maddock
Nuclear Engineer
- MS Radiological Physics, Wayne State
- Niowave Radiation Safety Officer
- US Navy Nuclear Power School

Jerry Hollister
Chief Operating Officer
- BS Engineering, Univ of Michigan
- Former Naval Officer & Warranted Contracting Officer

Mark Sinila
Chief Financial Officer
- BS Business Admin, Albion
- Over 20 years experience in business administration

Steve Klass
Director of Manufacturing
- BS Engineering, Saginaw Valley
- Over 20 years experience in manufacturing at General Motors

Why Superconducting?

NIOWAVE
www.niowaveinc.com

- 10^6 lower surface resistance than copper
  - Most RF power goes to electron beam
  - CW/continuous operation at relatively high accelerating gradients >10 MV/m
- Large aperture resonant cavities
  - Improved wake-fields and higher order mode spectrum
  - Preserve high brightness beam at high average current (high power)

Commercial Uses of Superconducting Electron Linacs

High Power X-Ray Sources

Radioisotope Production

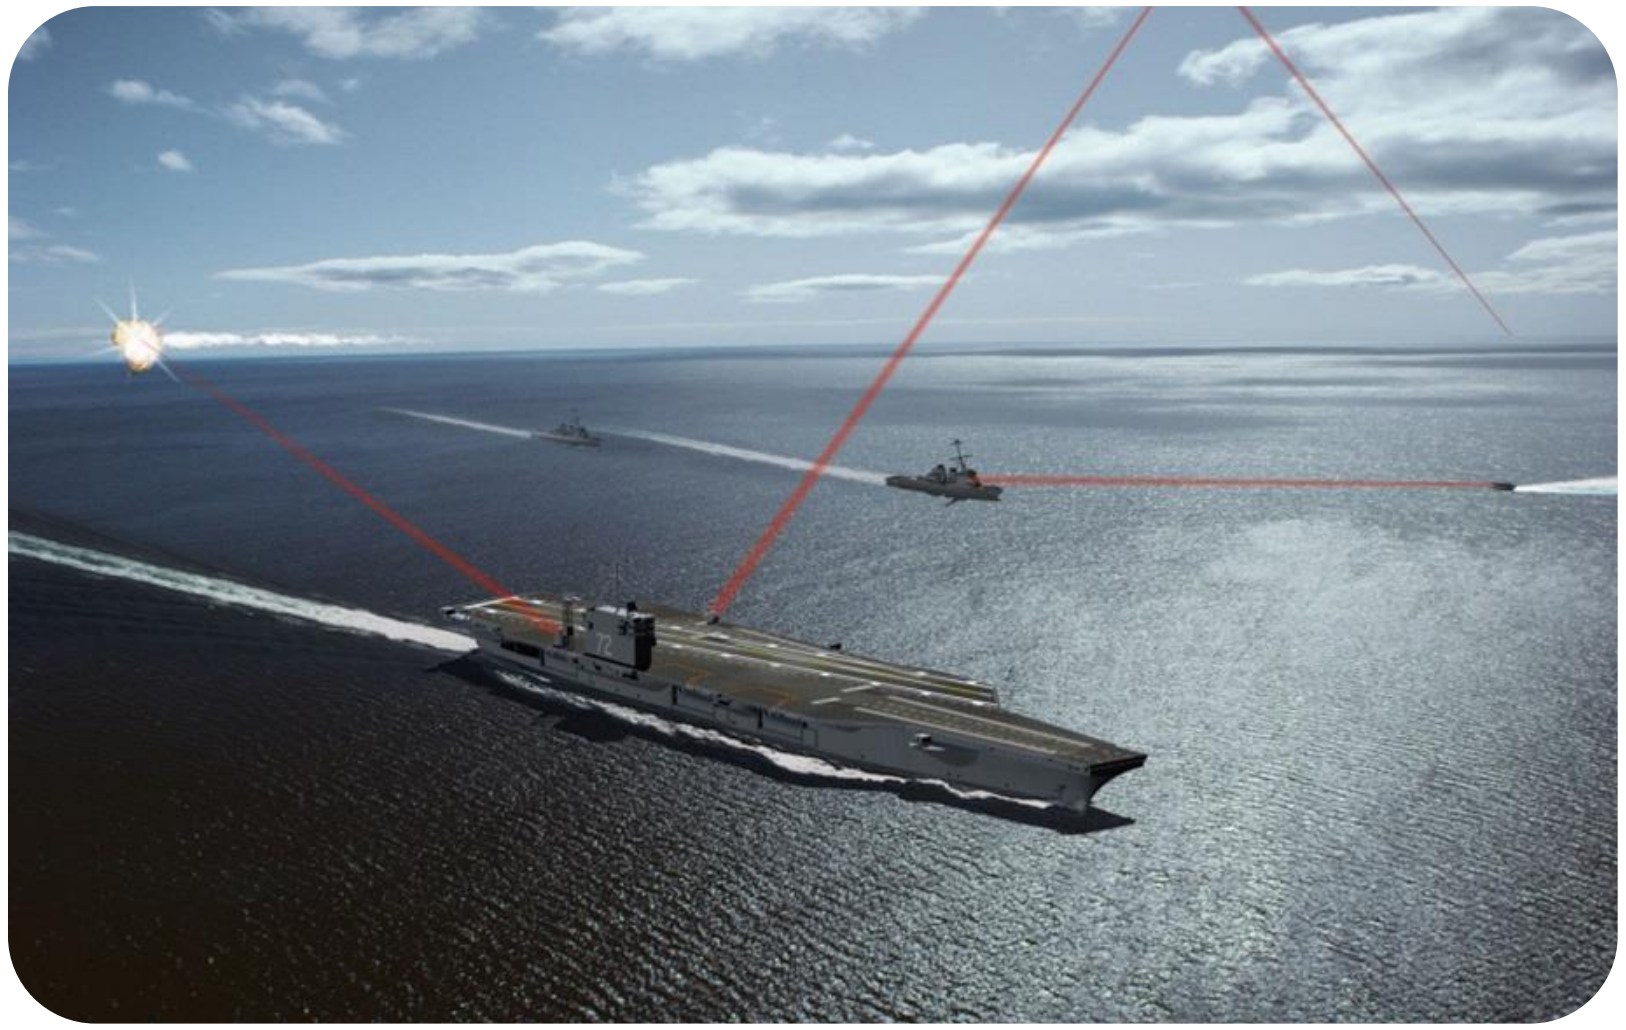

Free Electron Lasers

High Flux Neutron Sources

Superconducting Turnkey Electron Linacs

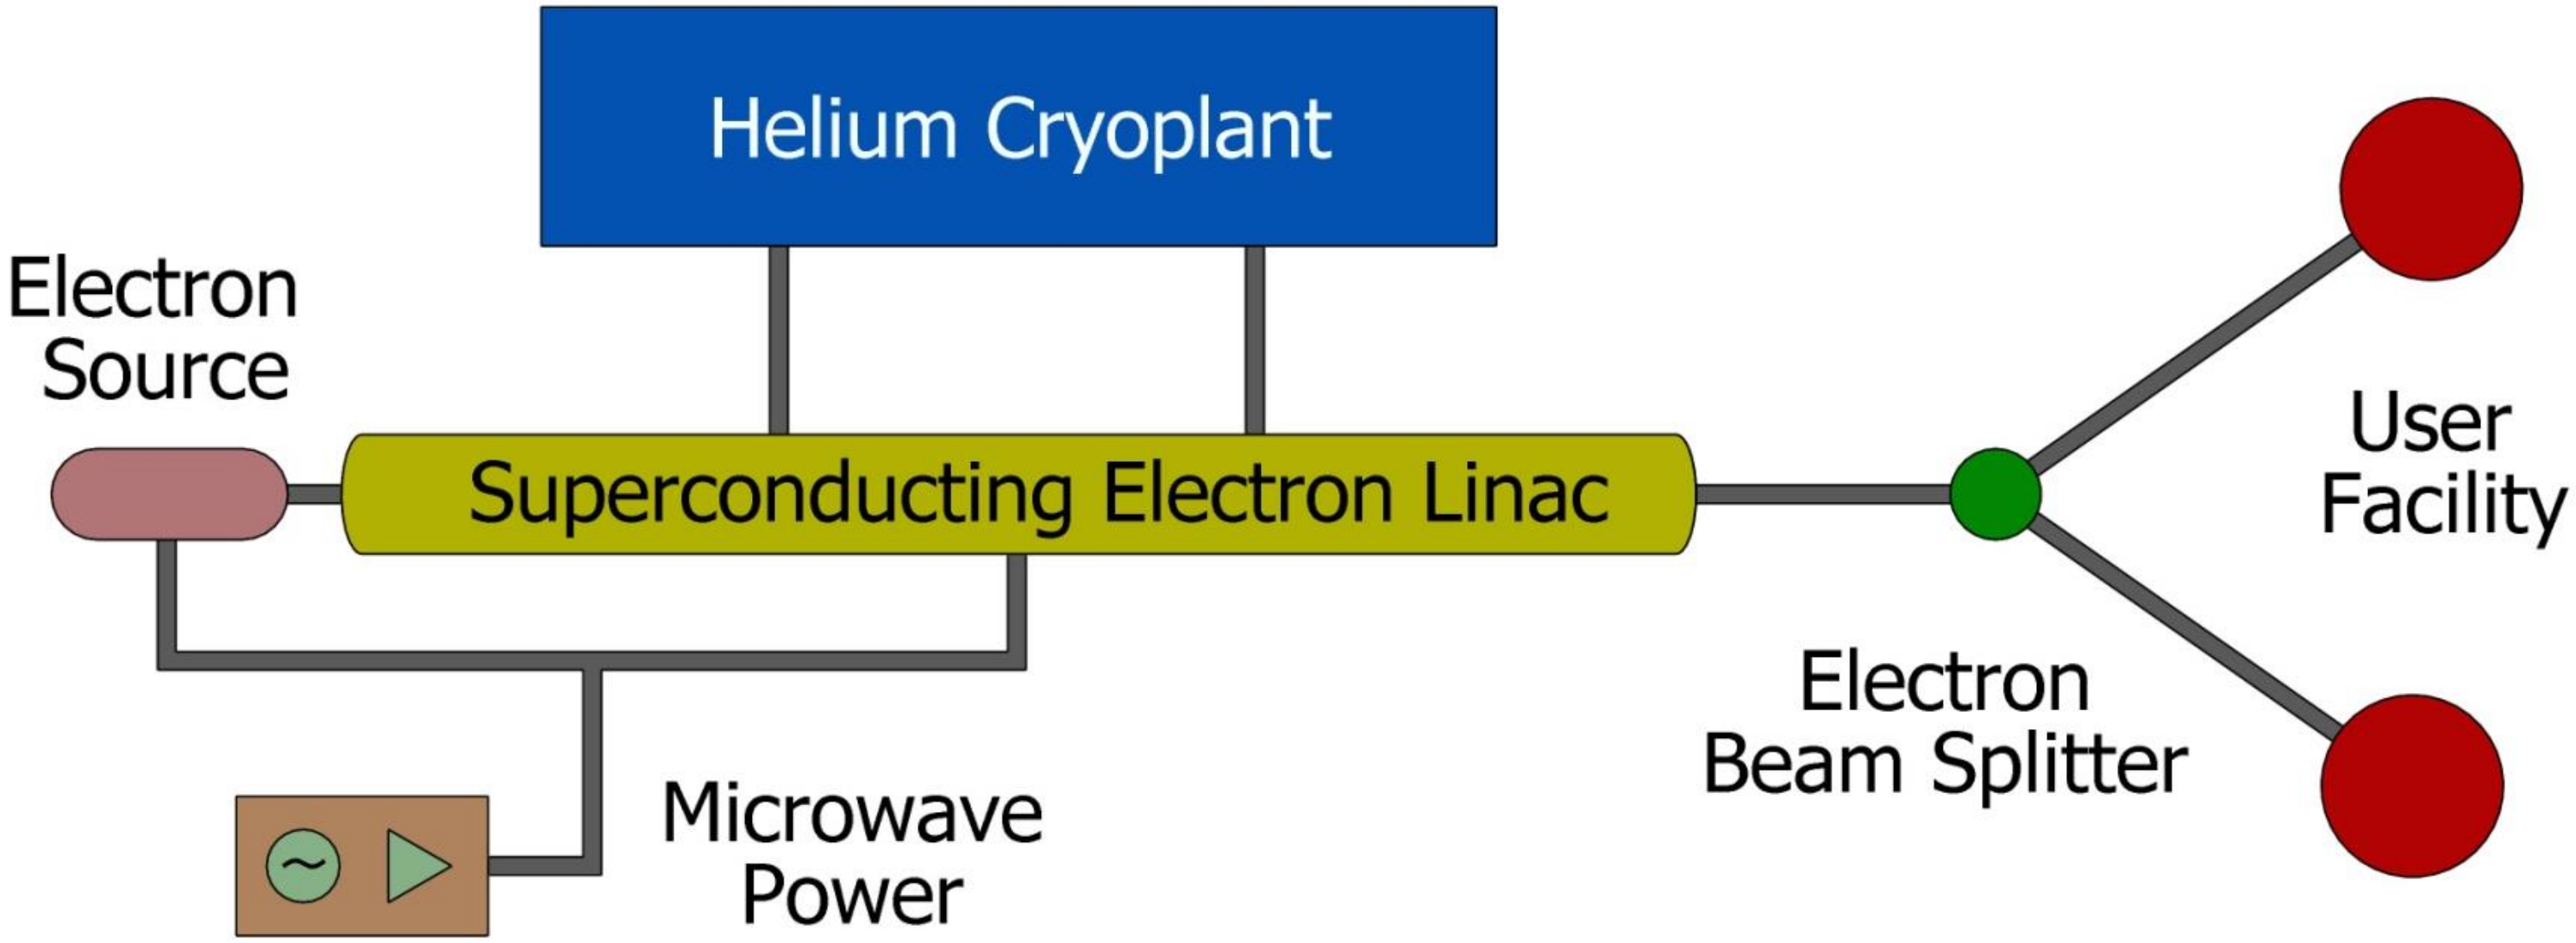

Turn-key Systems

- Superconducting Linac
- Helium Cryoplant
- Microwave Power
- Licensing

Electron Beam Energy	**0.5 – 40 MeV**
Electron Beam Power	**1 W – 100 kW**
Electron Bunch Length	**~5 ps**

Turnkey Linac Subsystems

RF electron guns

Solid-state and
tetrode RF
amplifiers
(up to 60 kW)

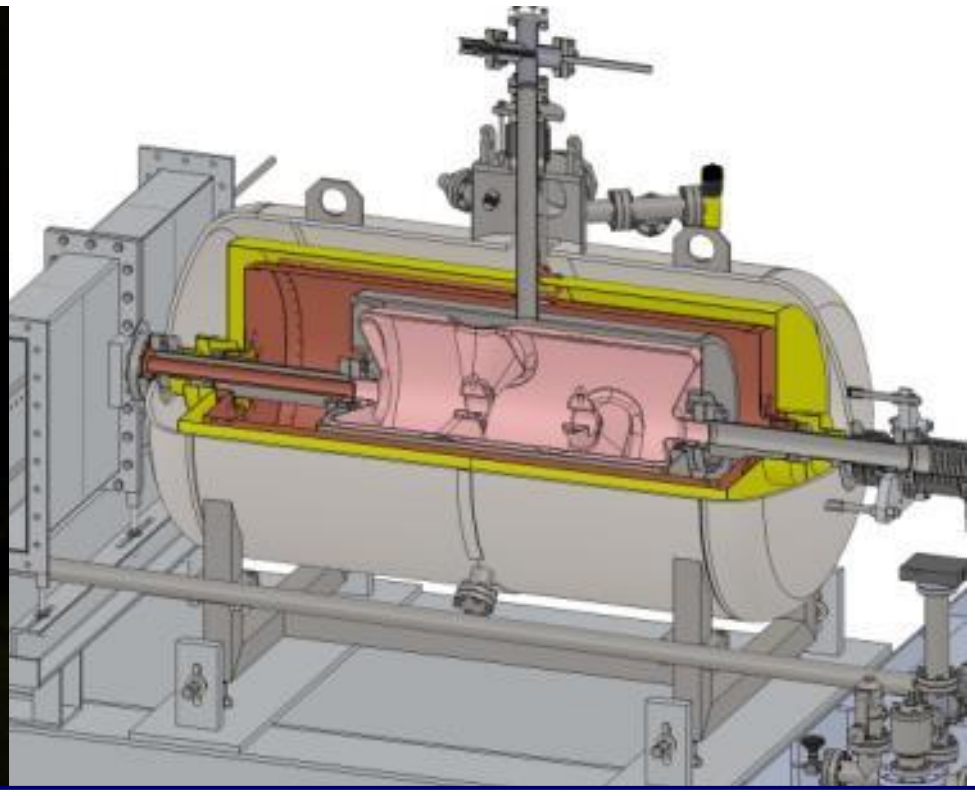

Superconducting cavities and cryomodules

High-power
couplers

Commercial 4 K refrigerators
(rugged piston-based systems,
100 W cryogenic capacity)

Superconducting Accelerating Cavities

NIOWAVE
www.niowaveinc.com

multi-cell elliptical

multi-spoke

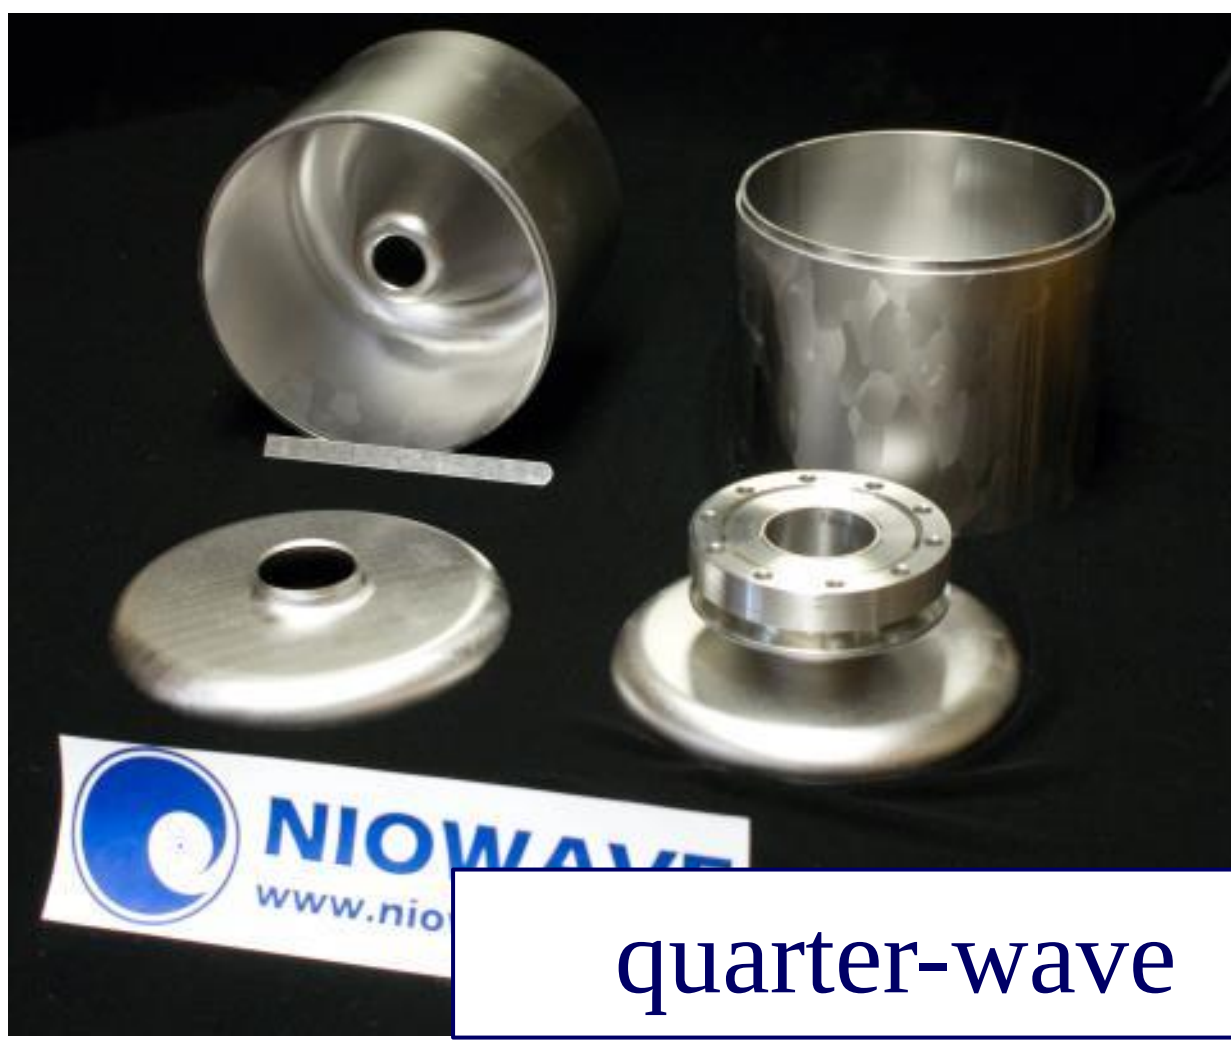

quarter-wave

photonic bandgap

Variety of new SRF cavity shapes are allowing compact, low-frequency acceleration with high average beam power.

Frequency & Temperature

NIOWAVE
www.niowaveinc.com

- Superconducting linacs have inherent losses due to the time varying fields

frequency

superconducting transition temperature

$$R_{BCS} \propto f^2 \exp\left(-\frac{T_c}{T}\right)$$

operating temperature

- For commercial electron linacs the minimum costs for a system occur around:
  - 300-350 MHz (multi-spoke structures)
  - 4.5 K (>1 atmosphere liquid helium)

Superconducting Multi-Spoke Cavities

- Advantages for low frequency, high current linacs
  - **Mechanical stability** (stable against microphonics)
  - **Compact geometry** for improved real-estate gradient and low-frequency operation at 4 K
  - **Improved higher-order-mode (HOM) spectrum** and damping

ONR Revolutionary Research . . . Relevant Results

Joint Technology Office High Energy Lasers

NPS Praestantia per Scientiam 1909

Los Alamos National Laboratory

Old Dominion University

RF Power Sources

NIOWAVE
www.niowaveinc.com

- Solid-state supplies to 5 kW
- Tetrode amplifer to 60 kW
- IOTs to 90 kW
- Klystrons to >1 MW

inductive output tube

klystron

tetrode

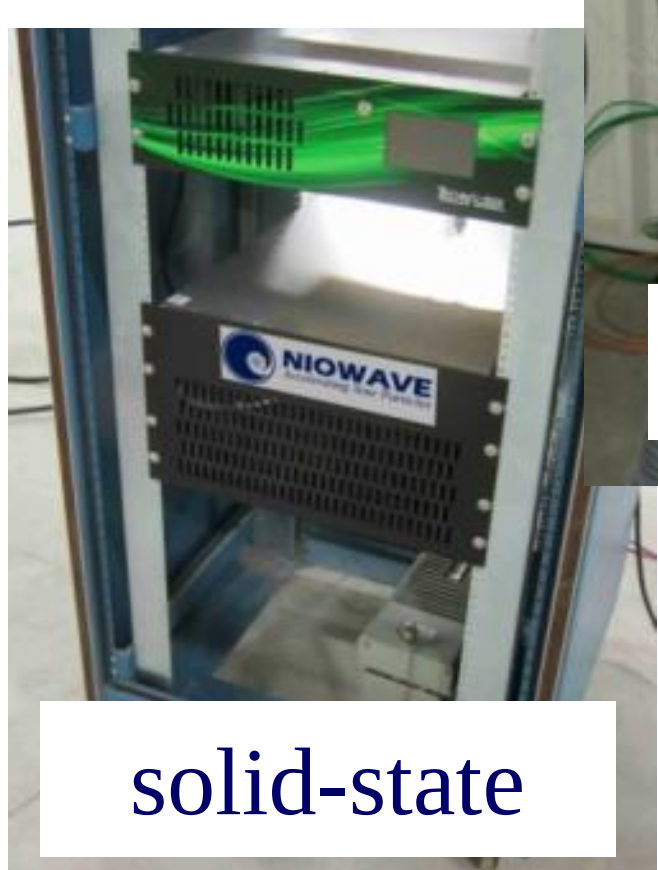

solid-state

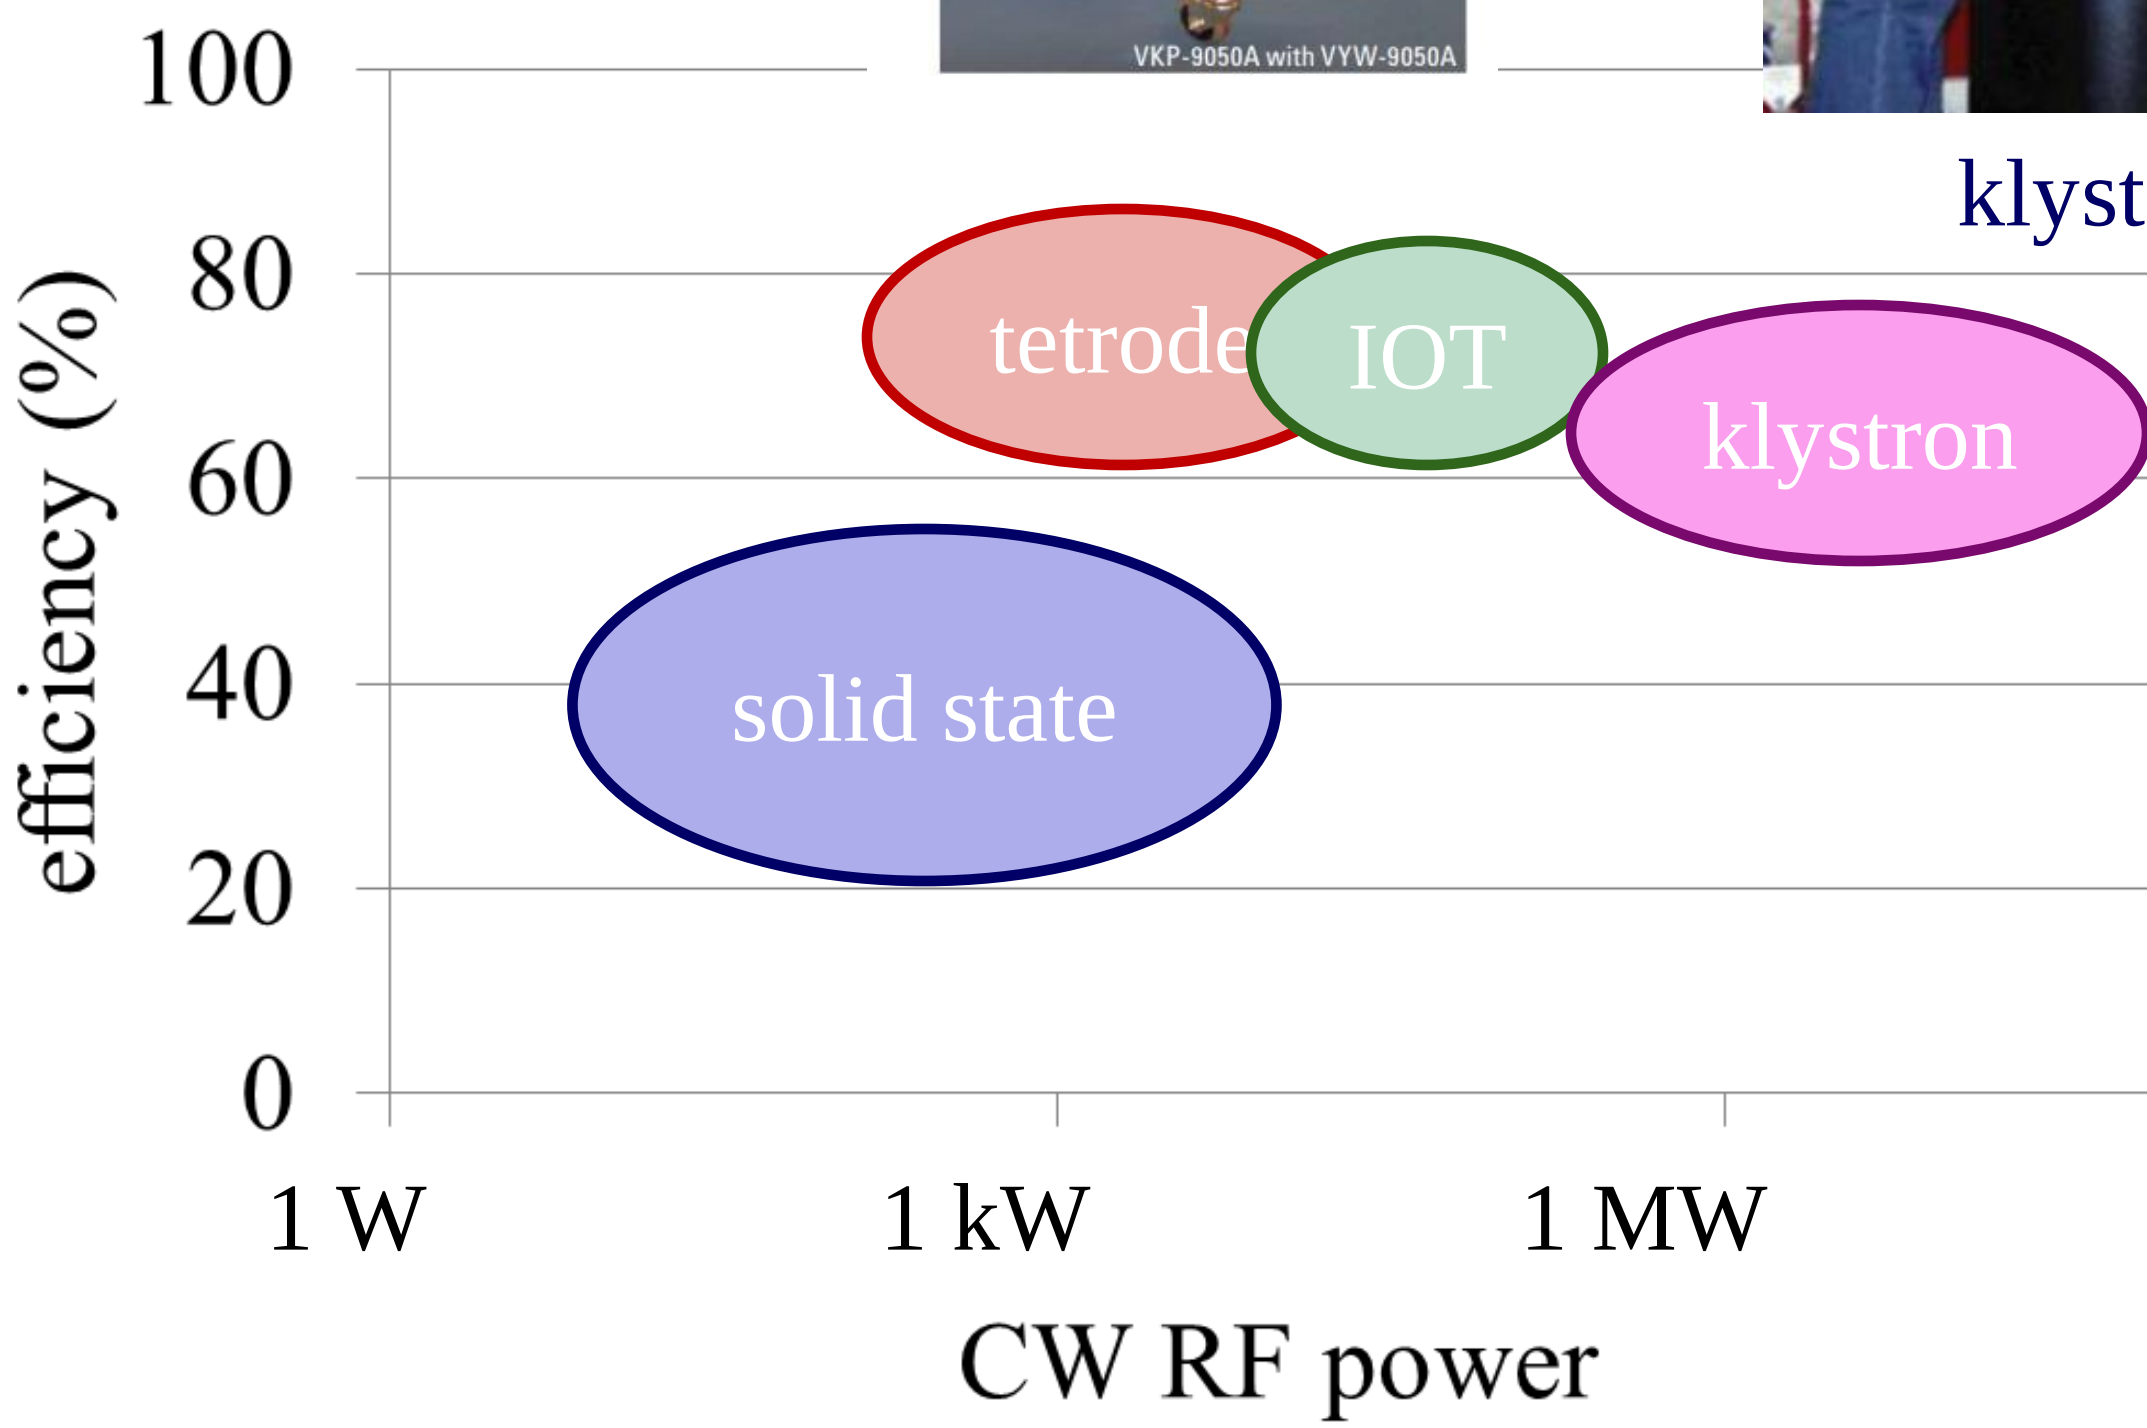

Commercial 4 K Refrigerators

- Cryo-cooler to 5 W
  - 4.5 K operation
  - 5 kW electrical power
- Commercial refrigerator to 110 W
  - 4.5 K operation (slightly above 1 atm)
  - total electrical power 100 kW
  - higher capacity units available

2 & 10 MeV Injectors

NIOWAVE
www.niowaveinc.com

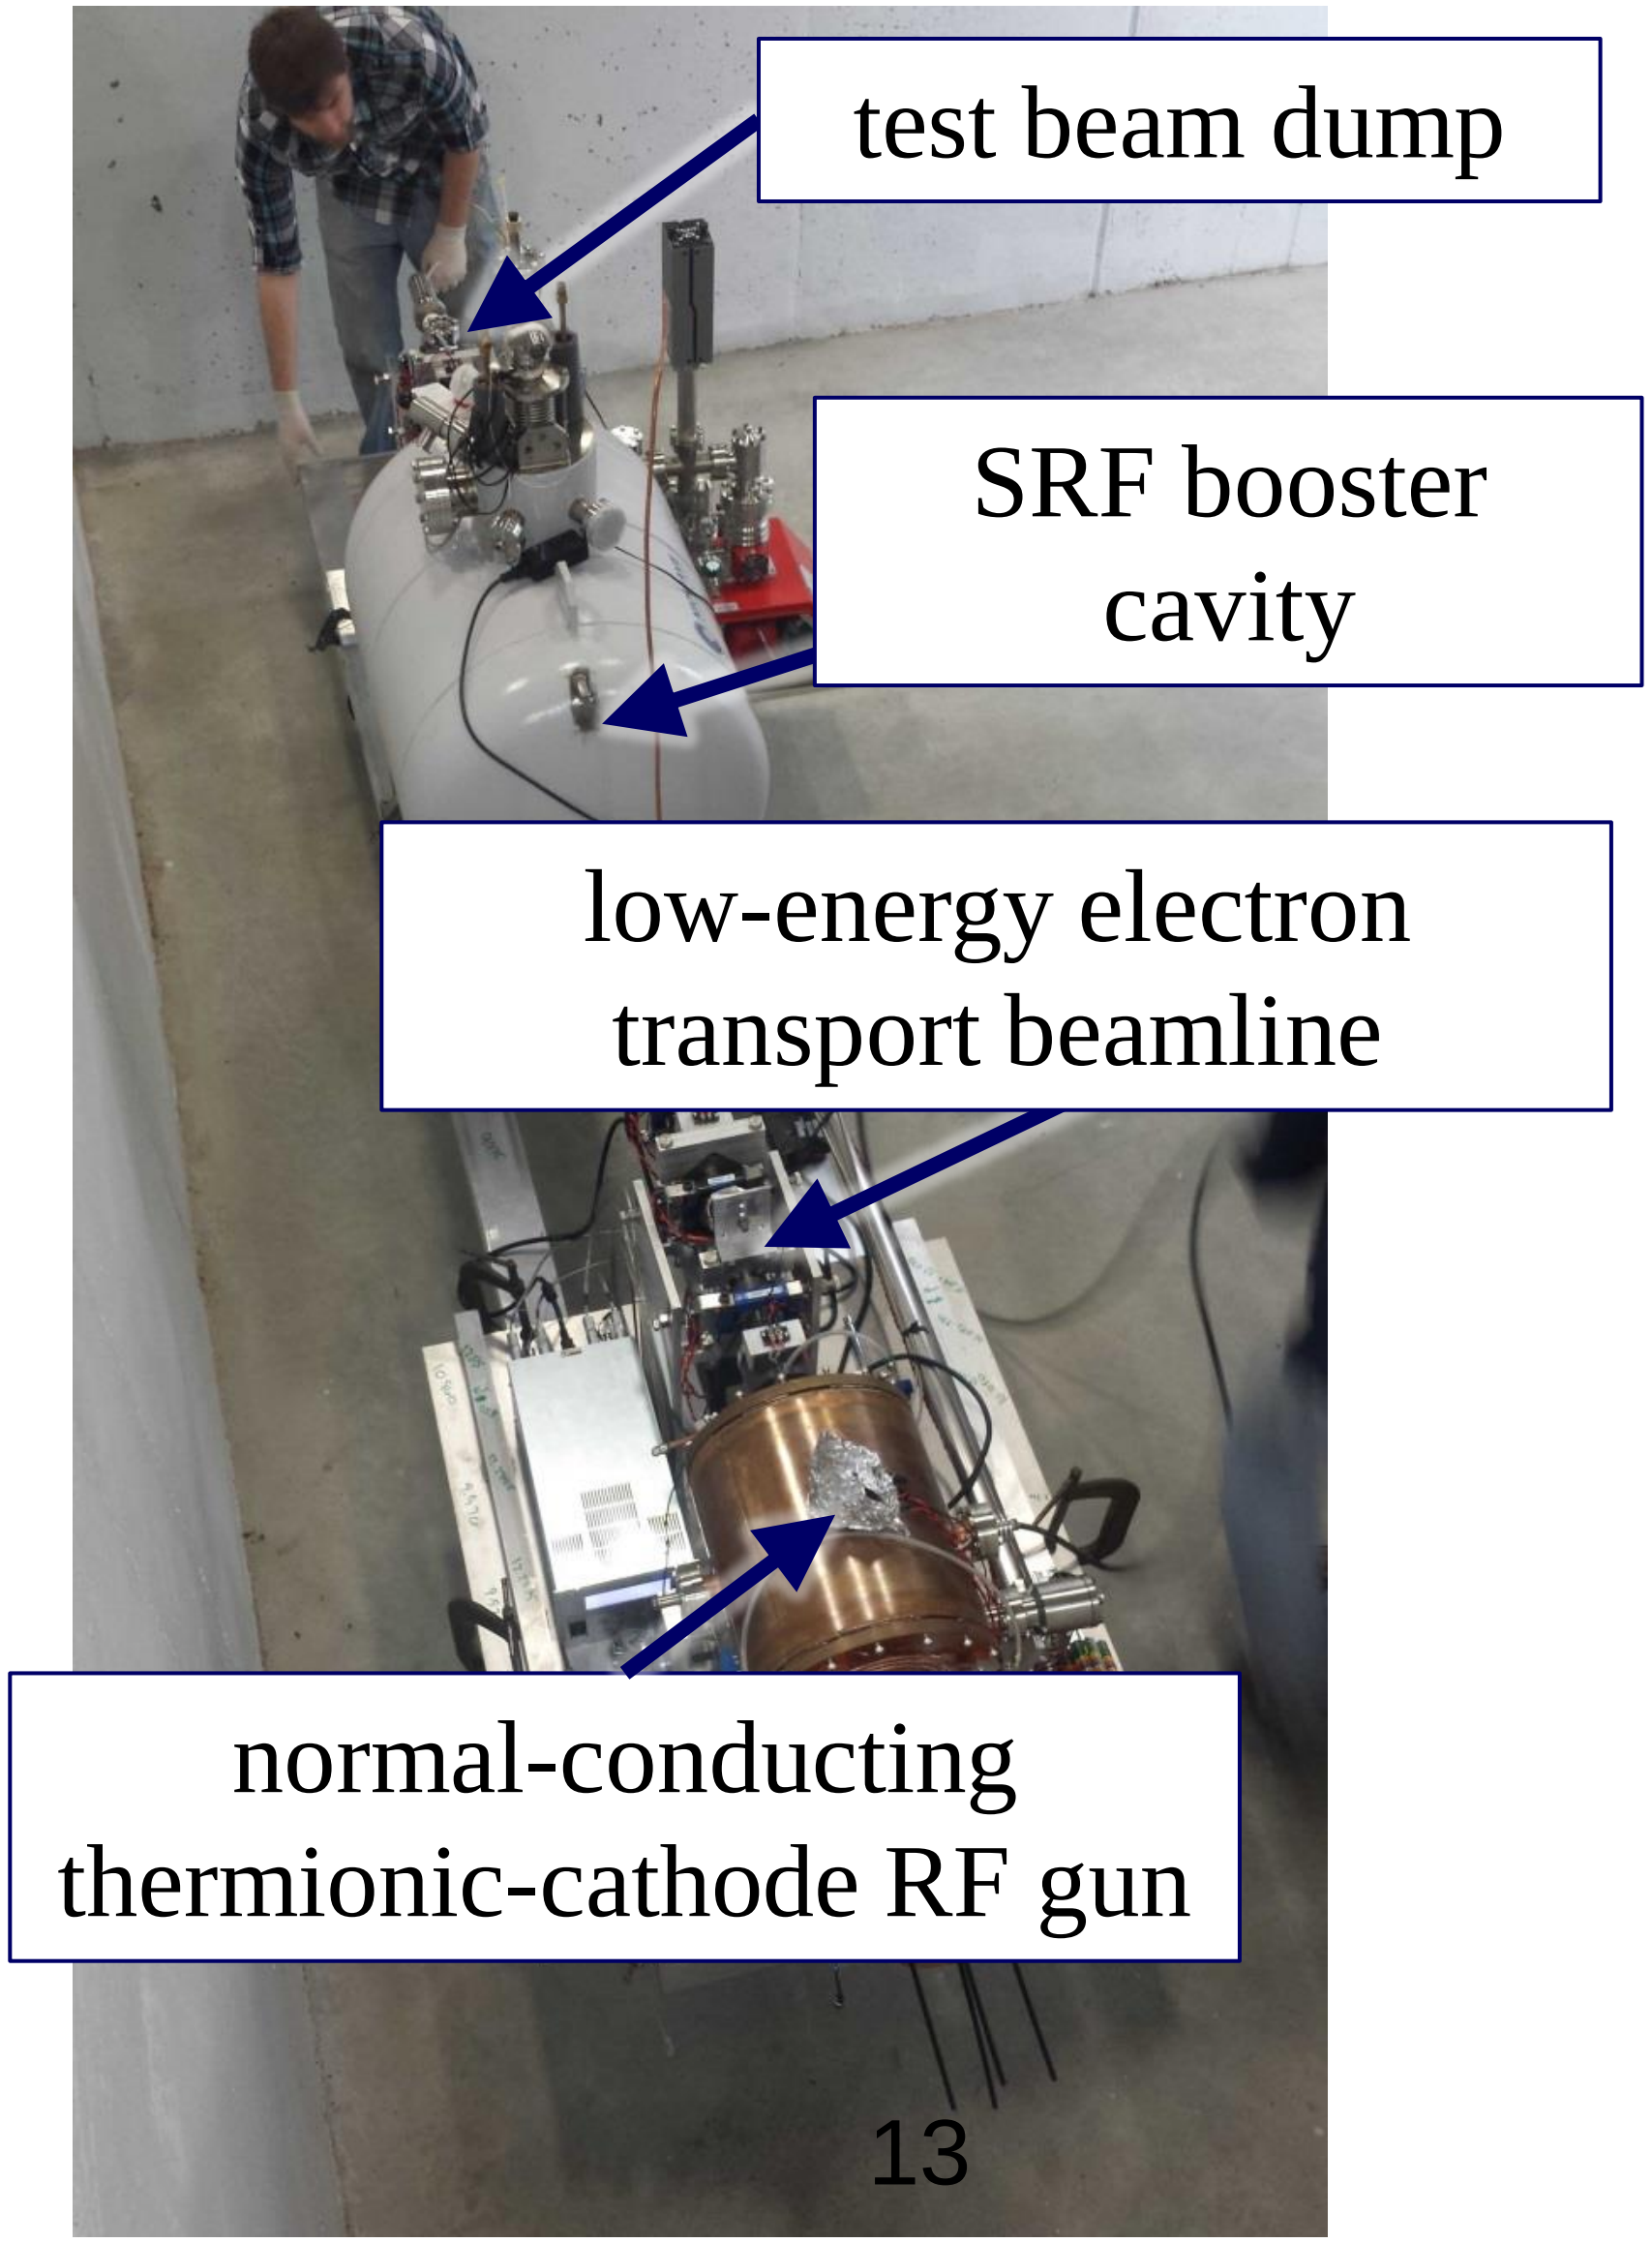

Parameter	2 MeV	10 MeV
cathode type	thermionic	thermionic
NCRF electron gun energy	100 keV	100 keV
SRF booster cavity energy	2 MeV	10 MeV
bunch repetition rate (gun, booster frequency)	350 MHz	350 MHz
transverse normalized rms emittance	3-5 mm mrad	3-5 mm mrad
bunch length @ 2 MeV	2-5 ps	2-5 ps
average beam current	2 mA	1-2 mA

Liquid Metal Converters[1]

NIOWAVE
www.niowaveinc.com

Bremsstrahlung Converter:

- High conversion efficiency (high Z)
- High melting point, if the converter is solid
- Low melting point and good thermomechanical properties (e.g., swelling, ductility loss, creep rates, etc.), if the converter is liquid
- Optimum thickness depends on electron energy and material

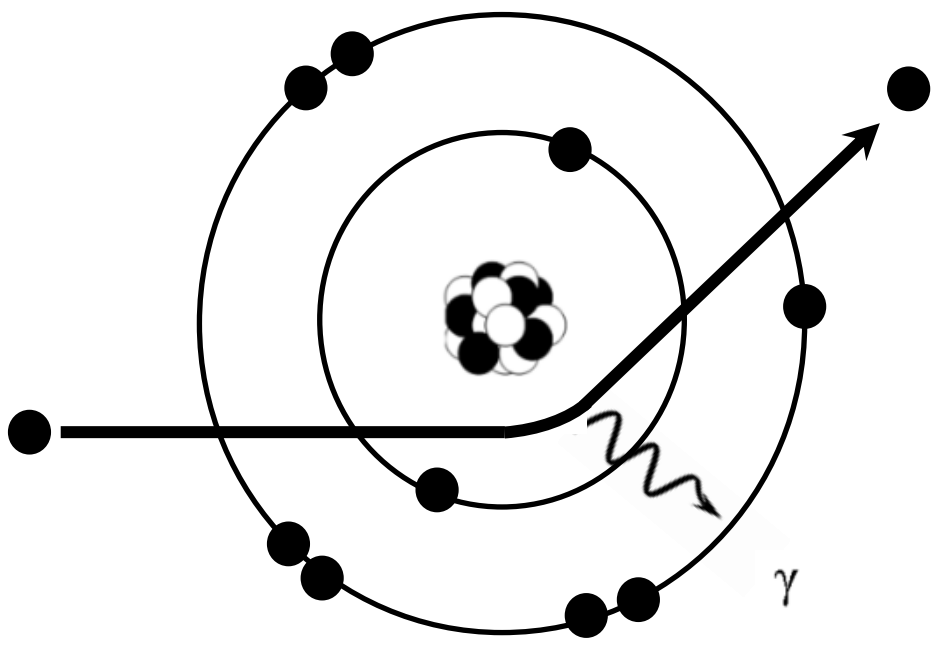

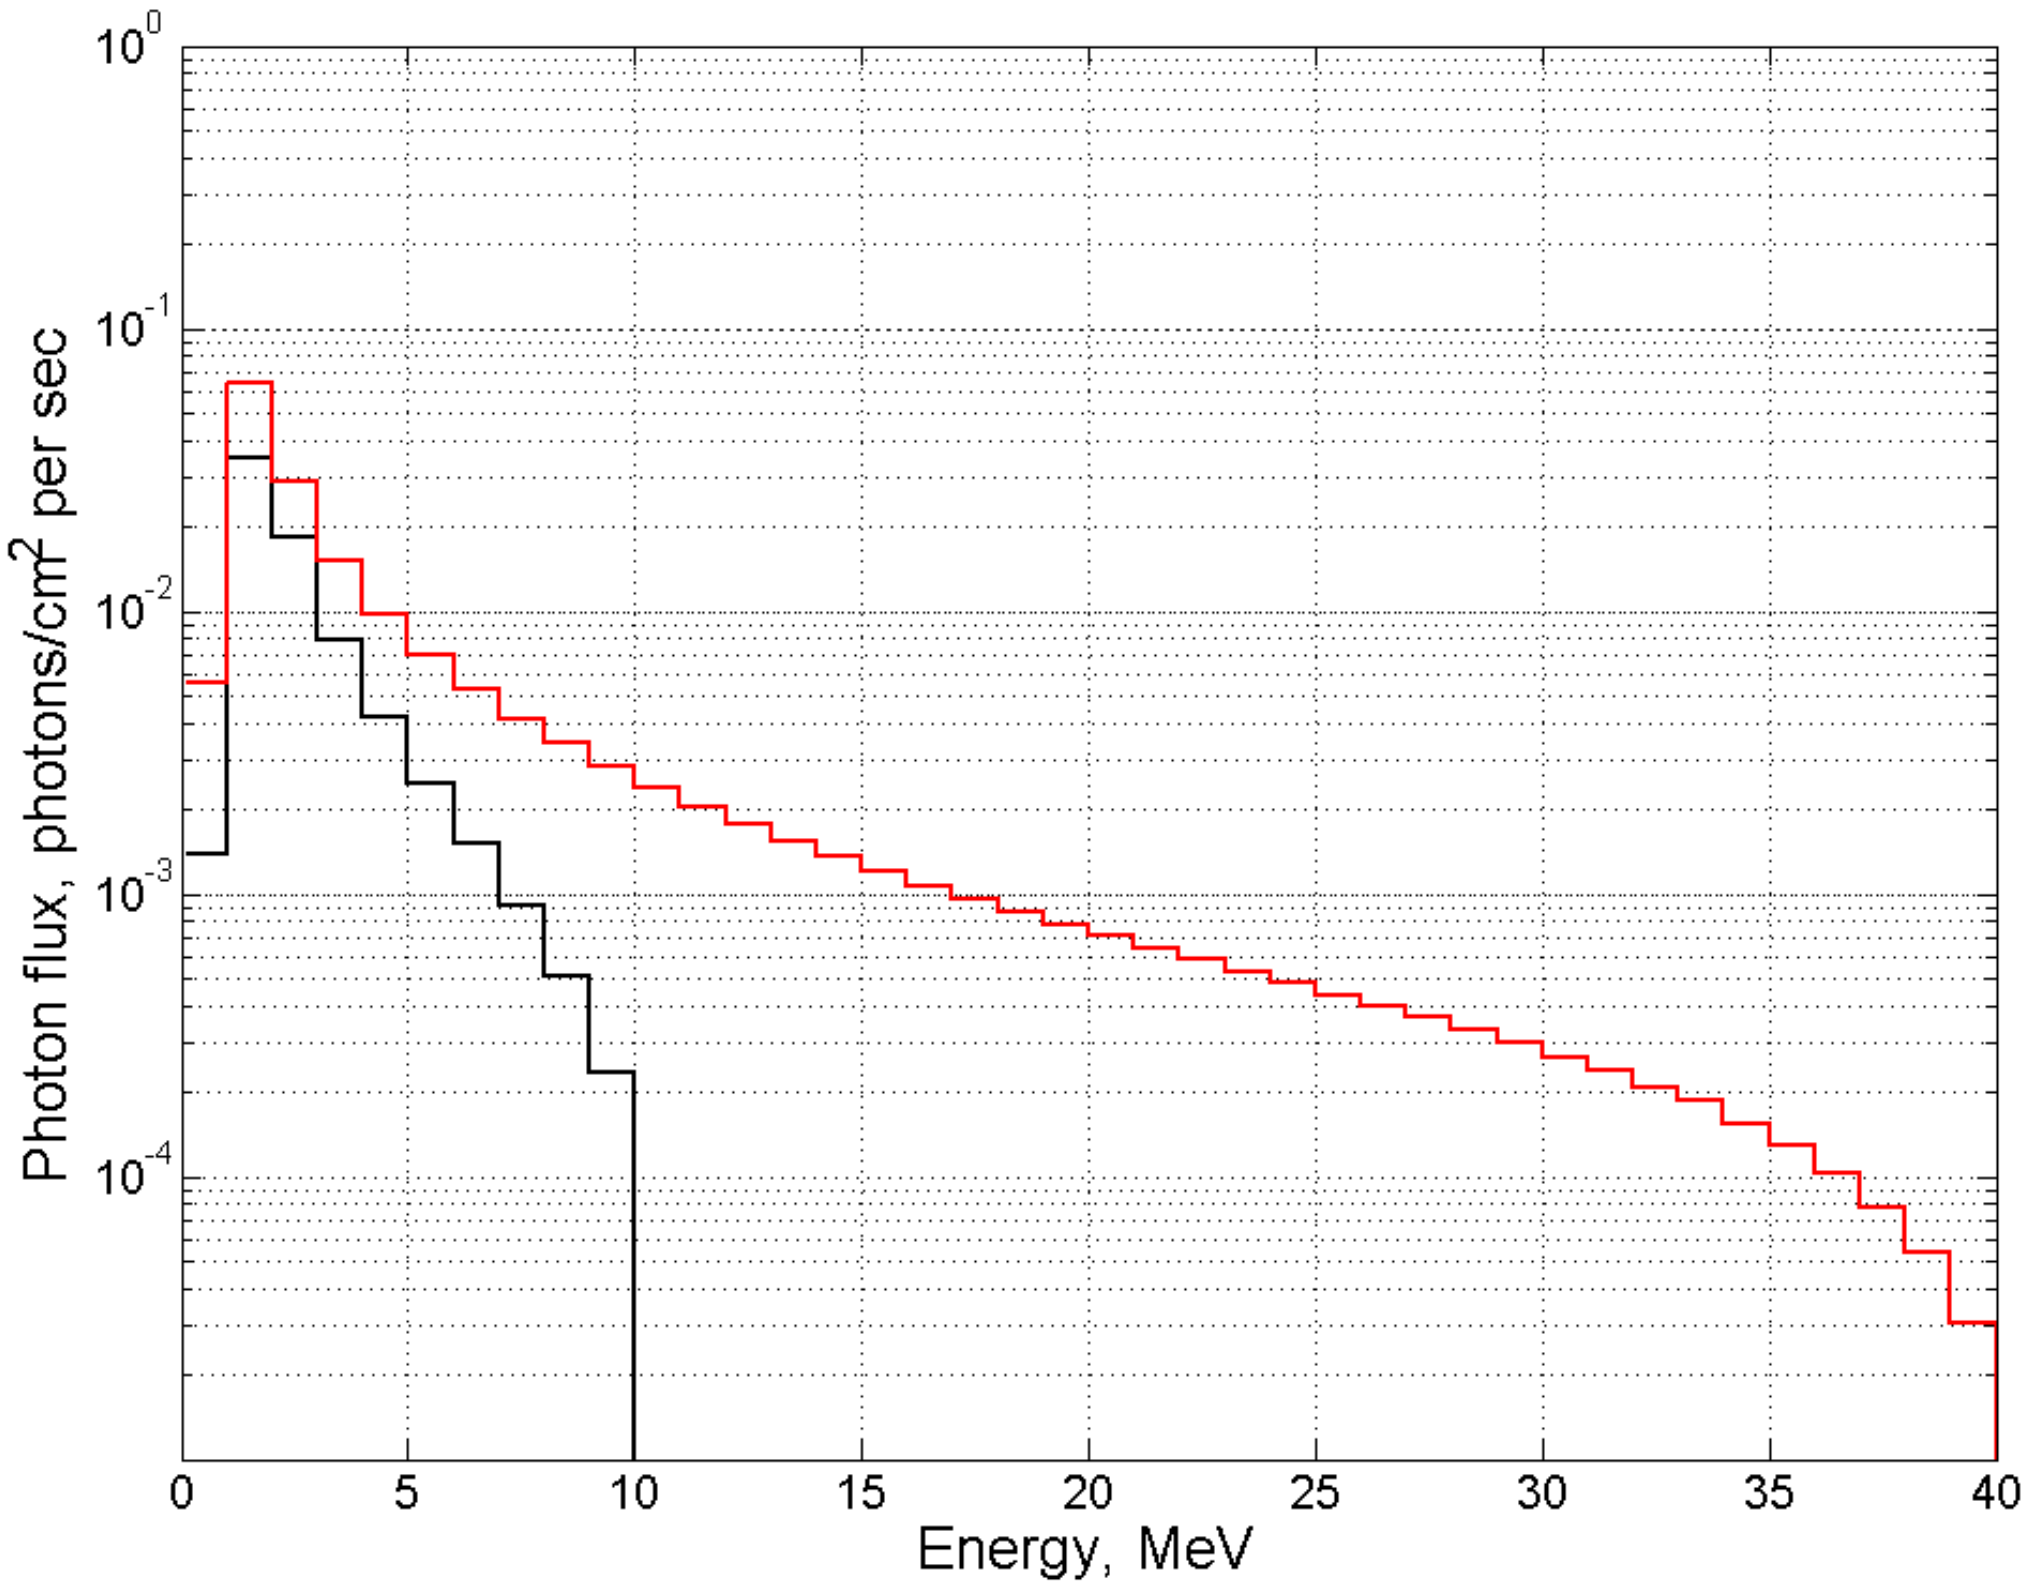

Liquid Metal Converters[2]

NIOWAVE
www.niowaveinc.com

Lead-Bismuth Eutectic (LBE)

- Low melting point:
  124°C
- High boiling point:
  1670°C
- Z=82,83

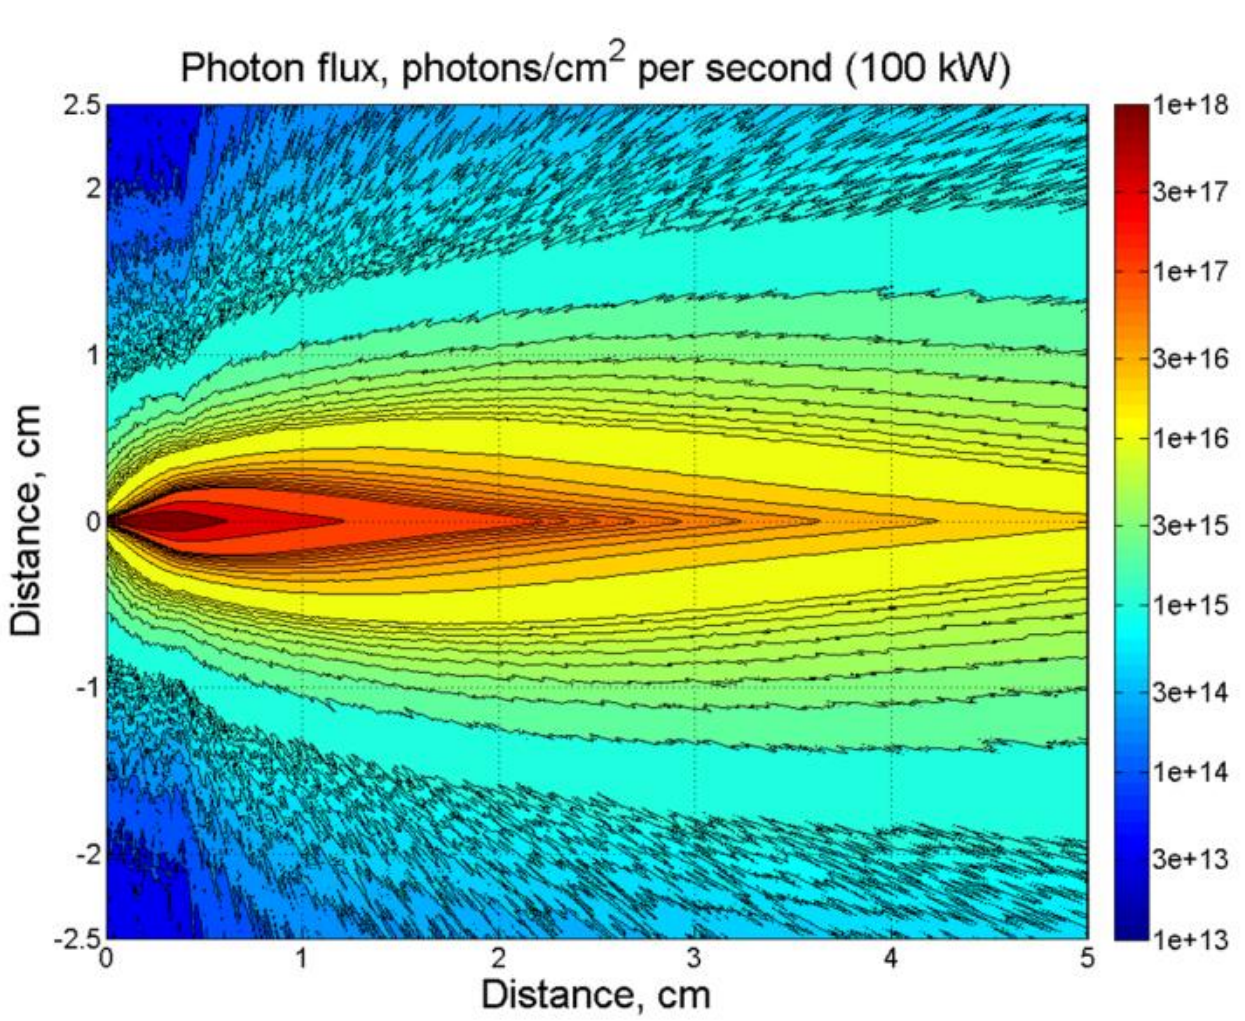

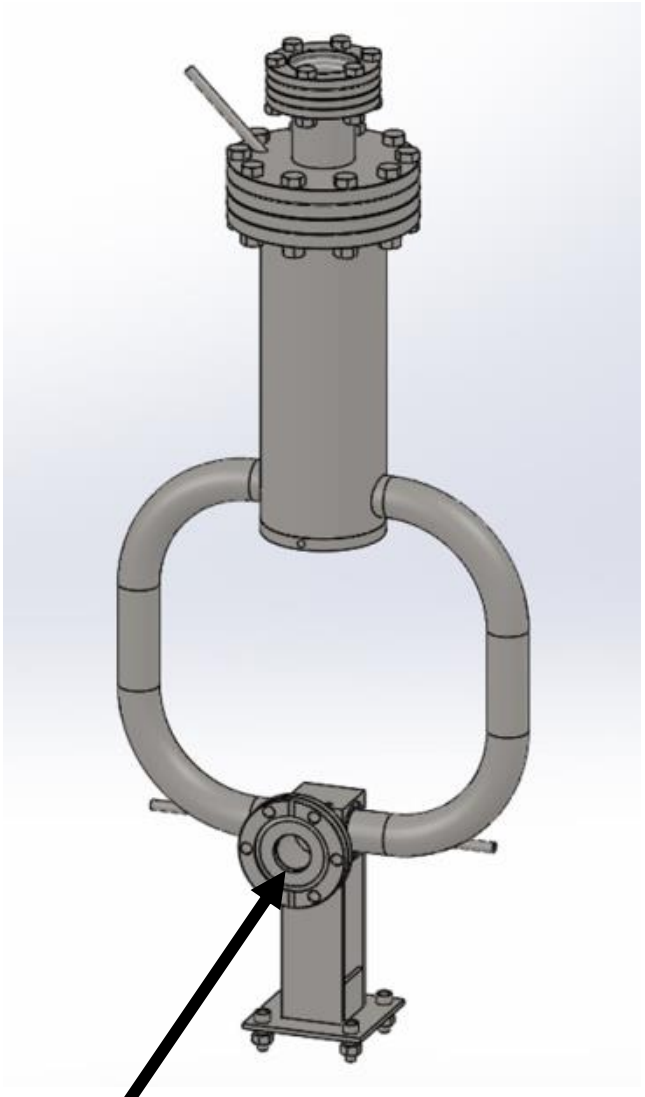

Converter region

Electron beam

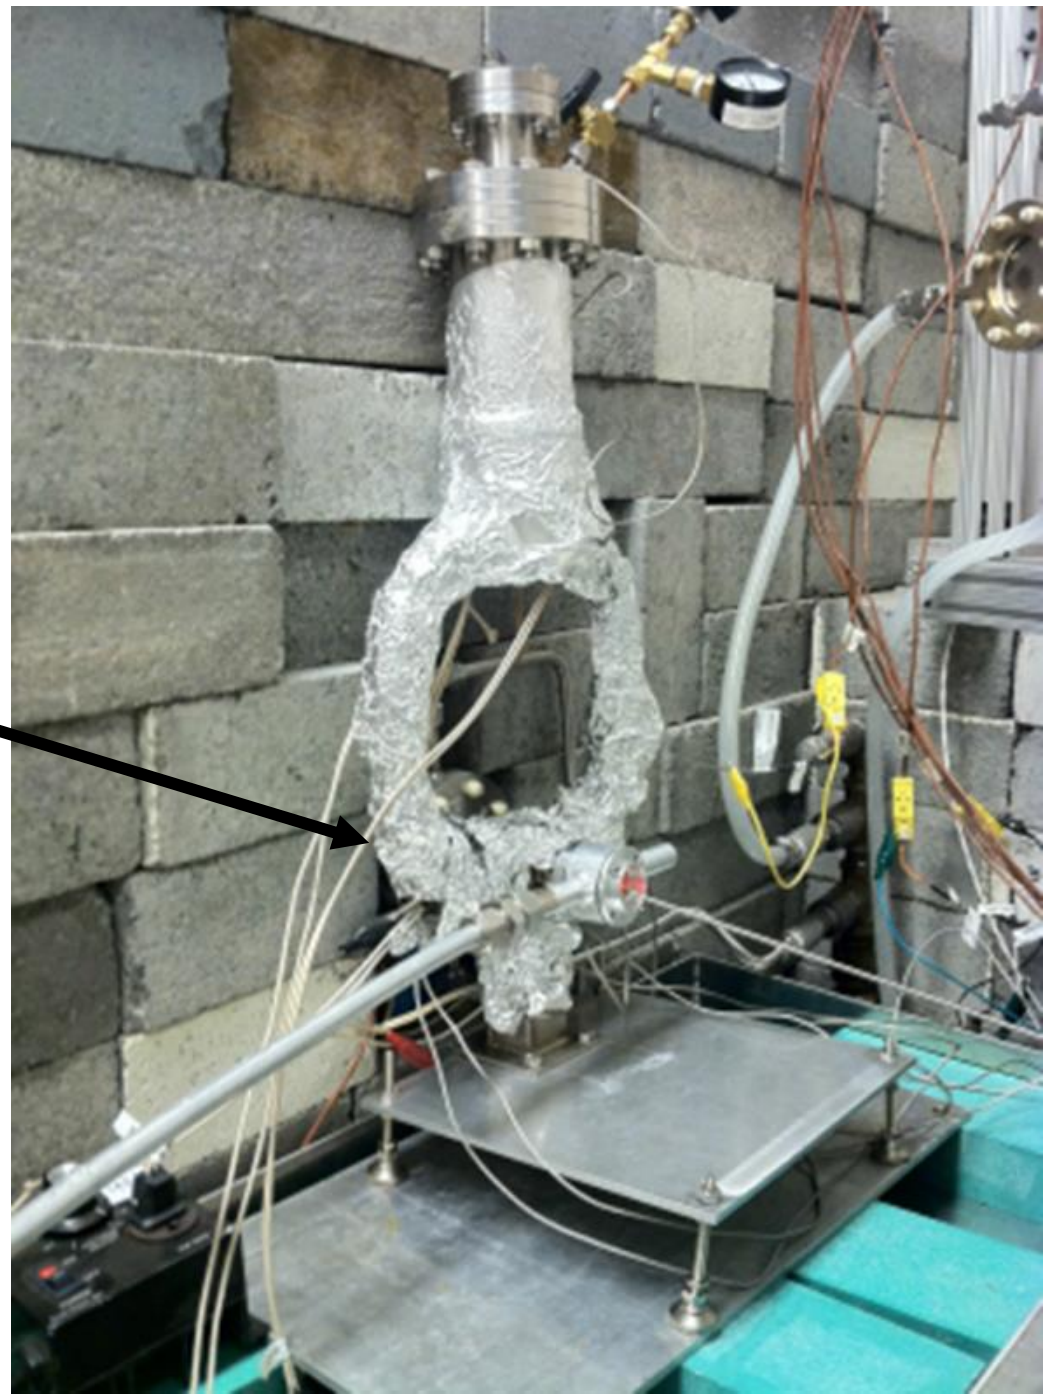

40 MeV, 1 kW test (2013)

Isotope Production

NIOWAVE
www.niowaveinc.com

- Photonuclear production of medical, industrial, and research isotopes for DOE Isotope Program
  - (γ, n)
  - (γ, p)
  - (n, γ)
- Mo-99 production from LEU - domestic facilities which do not rely on using highly enriched uranium
  - $(\gamma, \text{fission})$
  - $(n, \text{fission})$

Molybdenum-99

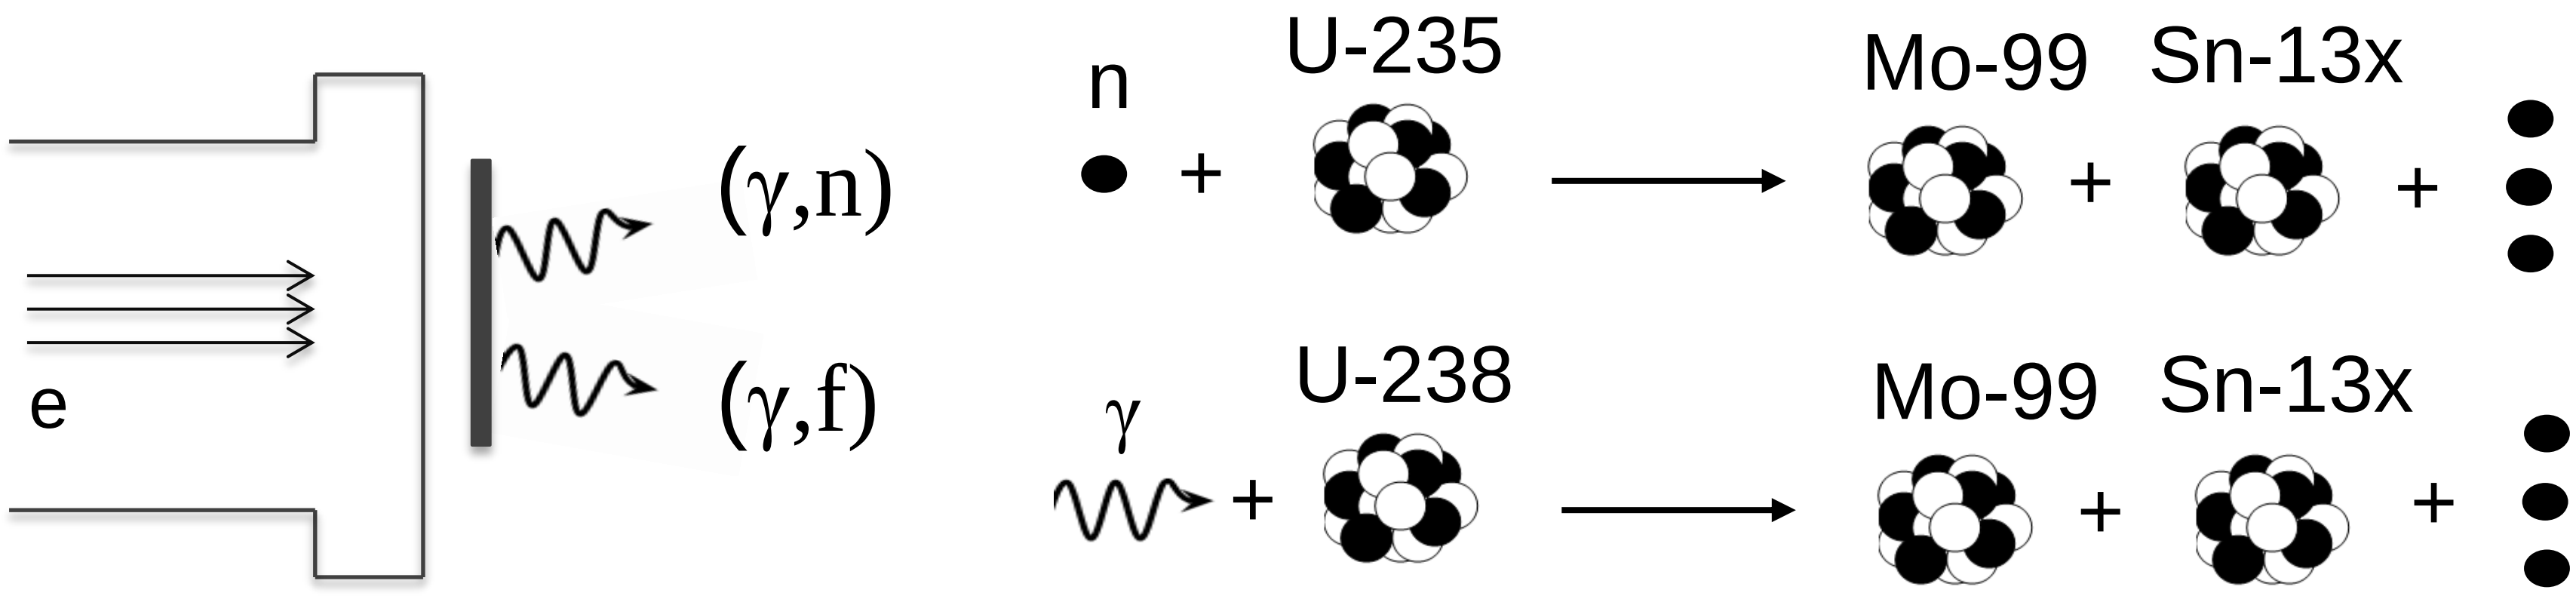

Electrons are accelerated

Electrons brake and produce photons

Photons:

a) Induce photon-fission
b) Liberate neutrons via fission and (γ,n) reactions and result in neutron-induced fission

Mo-99 Production Rates

NIOWAVE
www.niowaveinc.com

- Using LEU we plan to produce ~9 kCi of Mo-99 (~1,500 six-day curies) weekly at each of the 40 MeV 100 kW facilities

- 4-5 such facilities will satisfy North America's demand of Mo-99

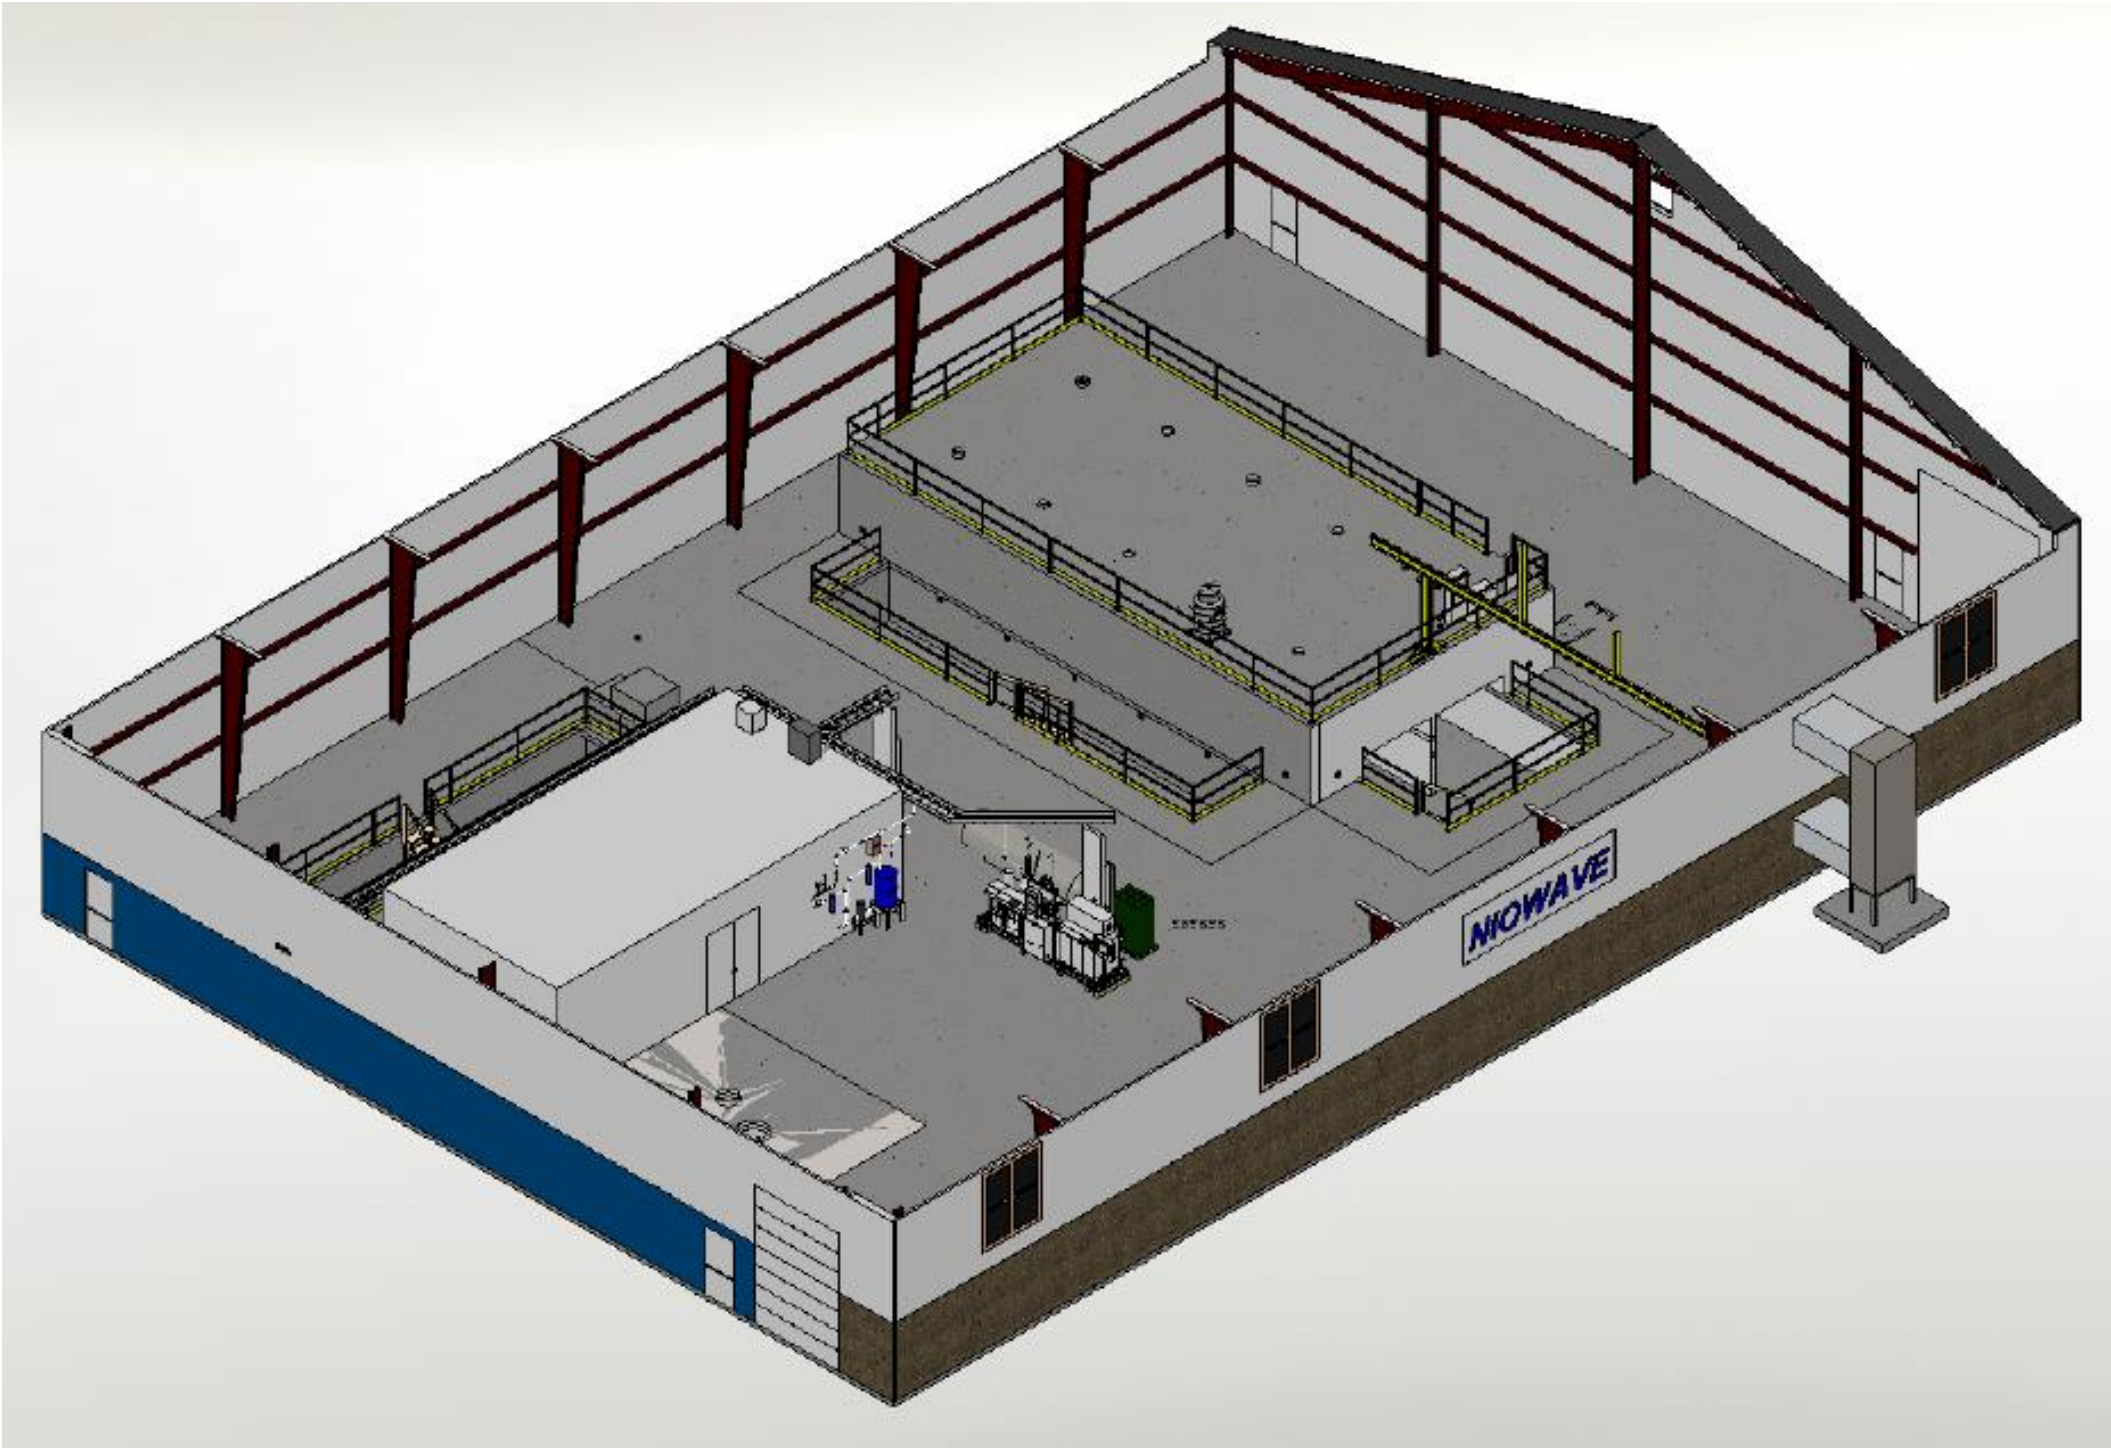

Mo-99 Recovery

NIOWAVE
www.niowaveinc.com

- Metal uranium production targets
- Molybdenum recovery
  - Uranium target dissolution with HNO_3
  - Molybdenum adsorption on ion exchange resin
- Standard Tc-99m generators
  - Capable of using the existing supply chain
- Waste consolidated and shipped to LLW/HLW repositories

Licenses

NIOWAVE
www.niowaveinc.com

- State of Michigan
  - Licensed to operate 40 MeV, 100 kW linacs
    - License number PR-2013-0346
- Nuclear Regulatory Commission
  - Source Material License
    - Licensed to possess, machine, and distribute DU, ^{nat}U, ^{232}Th
    - License number 21-35145-01
  - Isotope Production Licenses
    - Research isotopes - submitted and under review
    - Mo-99 – submission pending additional assessment and discussion

Mo-99/LEU Licensing Plan [1]

NIOWAVE
www.niowaveinc.com

- Plan to scale up production and processing as technical and financial milestones are met
- Phased approach to production and processing

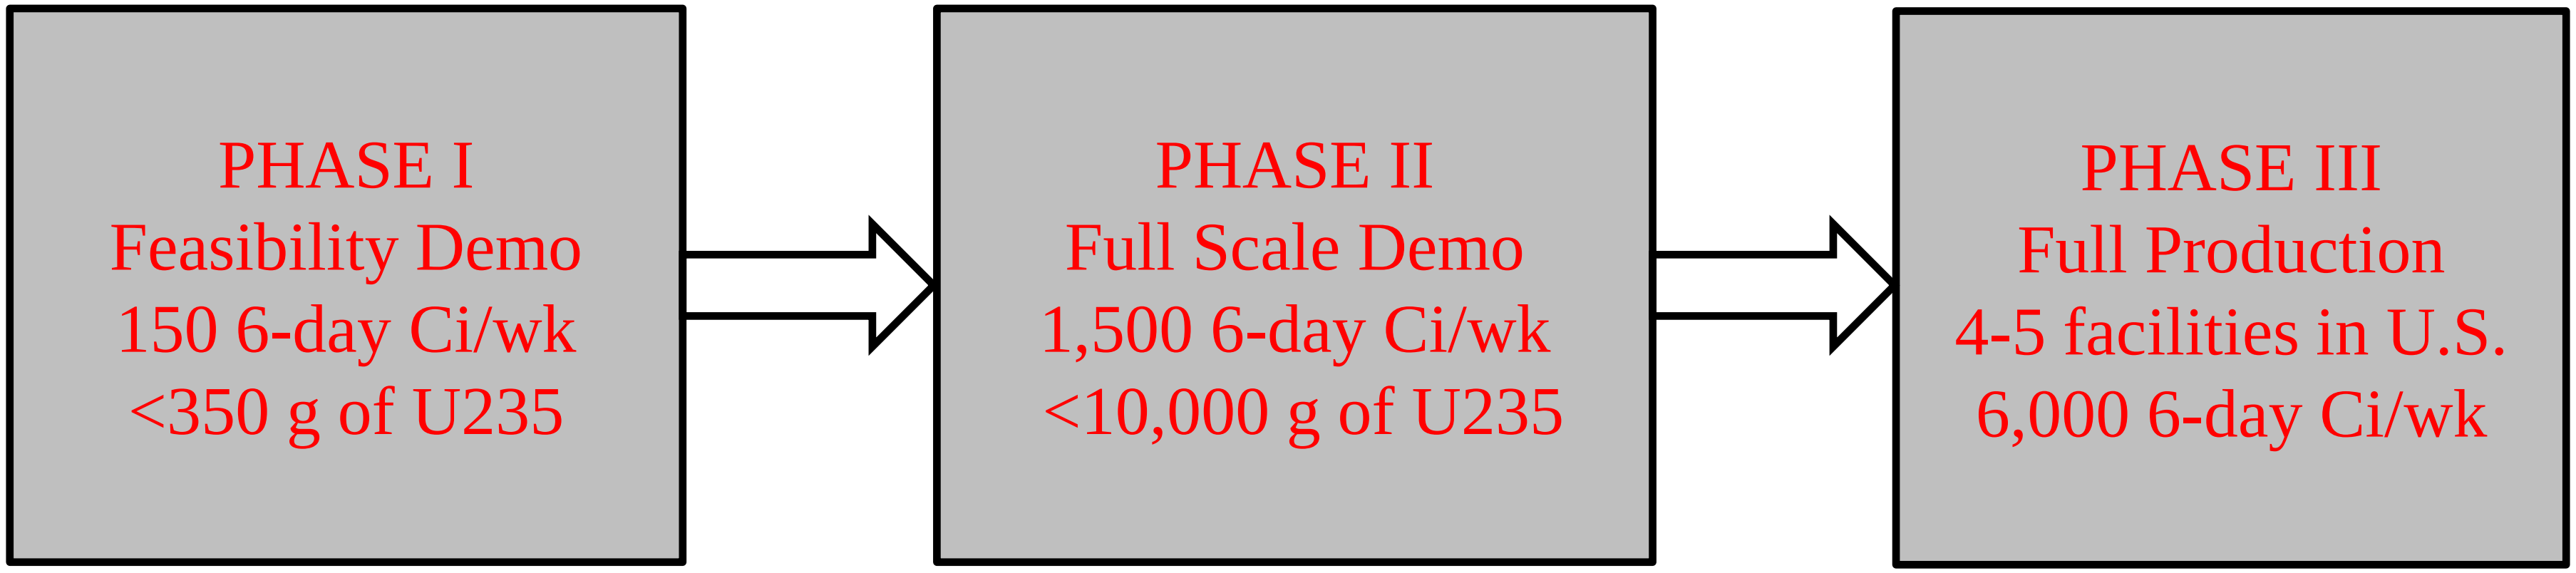

Mo-99/LEU Licensing Plan [2]

NIOWAVE
www.niowaveinc.com

- Phase I – Feasibility Demo
  - Produce up to 900 Ci/wk (150 6-day Ci/wk)
  - Inventory of <1,750 g of 20% LEU (<350 g U235)
    - Part 150 Less than critical mass
  - Batch process <10 g of 20% LEU (<2 g U235)
    - Part 30 Byproduct from accelerators

Mo-99/LEU Licensing Plan [3]

NIOWAVE
www.niowaveinc.com

- Phase II – Full Scale Demo
  - Produce up to 9,000 Ci/wk (1,500 6-day Ci/wk)
  - Inventory of <50,000 g of 20% LEU (<10,000 g U235)
    - Part 70 Cat 3 SNM of low strategic significance
  - Batch process <100 g of 20% LEU (<20 g U235)
    - Part 30 Byproduct from accelerators
  - Extract additional isotopes of commercial value
    - I131, Xe133, etc.

Mo-99/LEU Licensing Plan [4]

NIOWAVE
www.niowaveinc.com

- Phase III – Full Production
  - Produce up to 36,000 Ci/wk (6,000 6-day Ci/wk)
  - 4 to 5 Production Facilities
    - Distributed around the U.S. to expedite distribution
    - Independently licensed under the same terms as the full scale demo
  - Distribute additional isotopes of commercial value
    - I131, Xe133, etc.

Niowave Headquarters [1]

NIOWAVE
www.niowaveinc.com

- Prototype and commission
  - 40 MeV superconducting electron linac
  - Isotope production target
- 2012 Dedication of testing facility
  - Keynote speakers: Senator Carl Levin, Senator Debbie Stabenow, Rear Admiral Matthew Klunder and MSU Provost Kim Wilcox

Niowave Headquarters [2]

NIOWAVE
www.niowaveinc.com

- Total 60,000 SF
  - Full in-house design, manufacturing, processing and testing capability
  - 3+ megawatts power
  - 60 kW RF power systems
  - Two 100 W helium refrigerators
  - Licensed to operate up to 40 MeV and 100 kW

A superconducting linac being installed in a Niowave testing tunnel

Interior of Niowave testing facility

Niowave Airport Facility

NIOWAVE
www.niowaveinc.com

- New manufacturing facility under construction
  - Beneficial occupancy in Nov 2014
  - Production & distribution of isotopes
    - 24/7 operation
  - Additional expansion space available

Summary

- Niowave's photonuclear isotope facilities will be capable of supplying the entire Mo-99 requirements of North America
- First Mo-99 production (small scale)
  - Planned for Dec 2014
- Research isotopes supplied to DOE Isotope Program
  - Planned for Dec 2014