

NRC DISTRIBUTION FOR PART 50 DOCKET MATERIAL

TO:

Mr. Benard C. Rusche

FROM:

Duke Power Company
Charlotte, North Carolina
Mr. William O. Parker, Jr.

DATE OF DOCUMENT

1/4/77

DATE RECEIVED

1/11/77

☒ LETTER☐ NOTORIZED

PROP

INPUT FORM

☒ ORIGINAL☒ UNCLASSIFIED☐ COPY

NUMBER OF COPIES RECEIVED

One signed

DESCRIPTION

Ltr. w/attached....re our 11/29/76 ltr...
concerning fission gas release for Oconee
Units 1-2-3.

(4-P)

PLANT NAME:

Oconee Units 1-2-3

ENCLOSURE

ACKNOWLEDGED

DO NOT REMOVE

SAFETY

FOR ACTION/INFORMATION

ENVIRO

1/11/77

RJL

☒ ASSIGNED AD:

Goller

ASSIGNED AD:

☒ BRANCH CHIEF:

Schwencer

BRANCH CHIEF:

☒ PROJECT MANAGER:

Zech

PROJECT MANAGER:

☒ LIC. ASST.:

Sheppard

LIC. ASST.:

INTERNAL DISTRIBUTION

☒ REG FILE

SYSTEMS SAFETY

PLANT SYSTEMS

SITE SAFETY &

☒ NRC PDR

HEINEMAN

TEDESCO

ENVIRO ANALYSIS

☒ I & E (2)

SCHROEDER

BENAROYA

DENTON & MULLER

☒ OELD

LAINAS

☒ GOSSICK & STAFF

ENGINEERING

IPPOLITO

ENVIRO TECH.

MIPC

MACARRY

KIRKWOOD

ERNST

CASE

KNIGHT

OPERATING REACTORS

BALLARD

HANAUER

SIHWEIL

STELLO

SPANGLER

HARLESS

PAWLICKI

SITE TECH.

PROJECT MANAGEMENT

REACTOR SAFETY

OPERATING TECH.

GAMMILL

BOYD

ROSS

EISENHUT (2)

STEPP

P. COLLINS

NOVAK

SHAO

HULMAN

HOUSTON

ROSZTOCZY

BAER (2)

PETERSON

CHECK

BUTLER

SITE ANALYSIS

MELTZ

R. Meyer

GRIMES

VOLLMER

HELTAMES

AT & I

F. COFFMAN

BUNCH

SKOVHOLT

SALTZMAN

J. GIBERT

J. COLLINS

RUTBERG

KREGER

EXTERNAL DISTRIBUTION

CONTROL NUMBER

☒ LPDR: Walhalla, S.C.

NAT. LAB:

BROOKHAVEN NAT. LAB.

☒ TIC:

REG V.IE

ULRIKSON (ORNL)

☒ NSIC:

LA PDR

ASLB:

CONSULTANTS:

☒ ACRS/16 CYS HOLDING/SENT: (at B. (1/11/77))

324 mby

DUKE POWER COMPANY

POWER BUILDING

422 SOUTH CHURCH STREET, CHARLOTTE, N. C. 28242

WILLIAM O. PARKER, JR.
VICE PRESIDENT
STEAM PRODUCTION

TELEPHONE: AREA 704
373-4083

January 4, 1977

Mr. Benard C. Rusche, Director
Office of Nuclear Reactor Regulation
U. S. Nuclear Regulatory Commission
Washington, D. C. 20555

Attention: Mr. A. Schwencer, Chief
Operating Reactors Branch #1

Re: Oconee Nuclear Station
Docket Nos. 50-269, -270, -287


Dear Mr. Rusche:

With reference to your November 29, 1976 letter concerning fission gas release (FGR), it has been determined that the three (3) Oconee Nuclear Station power reactors have already reached a burnup exposure in excess of 20,000 megawatt-days per metric ton of uranium in some fuel rods.


Please note that since the new fission gas release correlation has been submitted strictly for evaluation purposes at this time, the results should be reviewed accordingly. In particular, we have strong reservations concerning the applicability of this model to Oconee's low enriched UO₂ fuel rod design.

As requested by your letter, we have evaluated the impact of using the new fission gas release correlation in our thermal performance code (TAFY). Calculations of pin pressure and temperature have been made. These calculations were based on utilizing the TAFY code with and without the NRC FGR equation.

The TAFY analysis without the NRC FGR equation was taken from the Oconee II Cycle 1 licensing analysis. The input parameters and TAFY NRC restrictions are listed in the attached Table 1. This input is representative of all three Oconee units. Results of pin pressure and fuel temperature calculations are shown in Table 2. Since the input to the analysis using the two models are identical, the differences in pressures between the two models can be directly attributed to the difference in FGR models. The fuel temperatures remain the same because of the NRC restriction that BOL temperatures be used for accident analysis.

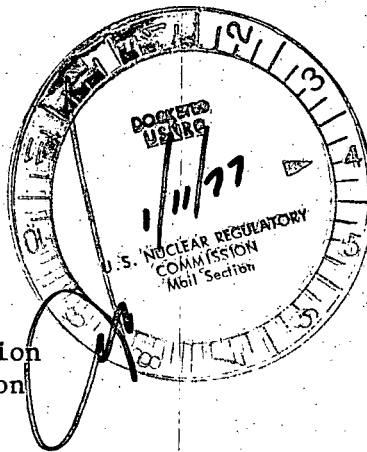

Regulatory Docket File

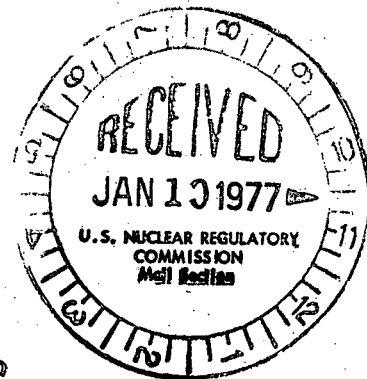

Mr. Benard C. Rusche

Page 2

January 4, 1977

The results indicated that the internal fuel rod pressure remains below the nominal system pressure for fuel burnup up to and including the maximum expected burnup.

The TAFY code without the NRC FGR equation is the code used in the safety analyses of LOCA and other accidents. A survey of the safety analyses of all accidents was performed, and it was concluded that the NRC fission gas release model would not affect the results of the safety analyses of non-LOCA transients. The average fuel temperatures used in the transient cladding temperature calculations for these transients are not changed by the new NRC FGR model. The higher pin pressures at end-of-life would not result in cladding rupture during these transients.

In case of the LOCA analysis, if the NRC FGR Model is used in TAFY, then the LOCA analysis will be impacted in an unfavorable manner. This is the result of higher pin pressures occurring at earlier burnups. Since initial inside and outside cladding surface oxide layers would be thinner at earlier burnups, the zircaloy-water (metal-water) reaction could possibly be larger than that previously calculated. The increased energy generation in the cladding could possibly result in a peak cladding temperature increase in excess of 20°F. The evaluation of the exact impact of this presumed higher fission gas release upon LOCA results would require an extensive analysis.

Duke Power Company believes that the staff's suggested fission gas release correlation is not applicable for the type of fuel and extent of burnup utilized in Oconee reactors and that further analysis is not warranted. B&W has made an independent review of the literature and the available experimental data to determine the appropriateness of the staff's new model. Although it appears that there is some enhancement of fission gas release at very high burnups, B&W's evaluation of the available UO2 data indicates that the increase in release rates with high burnups occurs later in life and to a lesser extent than one would predict using the staff's suggested FGR correlation. B&W's current approved analytical fuel pin model (TAFY), used in calculating fuel temperatures and pin pressures, contains significant margins to ensure sufficient conservatism. The additional margin provided for in the NRC staff's FGR model becomes overly conservative when compared with current evaluation techniques.

In accordance with your specific request, three signed originals and 40 copies of this letter are submitted.

Very truly yours,

William O. Parker, Jr.

William O. Parker, Jr. *by JWP*

TABLE 1

PIN PRESSURE ANALYSIS INPUT

(OCONEE 11 NSSS-4)

FUEL

INITIAL MEAN DENSITY - % TD	92.5
INITIAL MEAN DIAMETER - IN	0.370
INITIAL LTL DENSITY - % TD	92.0
FINAL DENSITY - % TD	96.5
DISH RADIUS - IN	0.150
DISH FACTOR	0.0170
INITIAL STACK LENGTH - IN	144

CLAD

CLAD ID - IN	0.377
CLAD OD - IN	0.430
CLAD LENGTH - IN	153
INITIAL PLENUM VOLUME - IN ³	0.75

RESTRICTIONS25% REDUCTION ON H_{GAP}

NO RESTRUCTURING

SORBED GAS CONTENT - 0.01 CC/GM

USE BOL TEMPERATURES FOR ACCIDENT ANALYSIS

TABLE 2

PIN PRESSURE AND FUEL TEMPERATURE FOR OCONEE 1, 2, & 3

Peak Rod Burnup (MWD/MTU)	TAFY B&W FGR Model		TAFY NRC FGR Model	
	Pin Press. (psi)	Avg. Fuel Temp.* at 17 KW/FT (°F)	Pin Press. (psi)	Avg. Fuel Temp.* at 17 KW/FT (°F)
20,000	1210	2990	1210	2990
22,000	1235	2990	1240	2990
25,000	1295	2990	1320	2990
27,000	1340	2990	1410	2990
30,000	1400	2990	1550	2990
32,000	1430	2990	1615	2990
35,000	1470	2990	1745	2990
37,000	1510	2990	1865	2990
38,000	1525	2990	1925	2990

*BOL Values