

ENCLOSURE 9

GEH Technical Report

WG3-U71-ERD-S-0004, Revision 2

Reactor Building Structural Design Report

**HITACHI****WG3-U71-ERD-S-0004**

Sheet 1 of 543 Rev. 2

STRUCTURAL DESIGN REPORT**REVISION STATUS SHEET****Document Title:** Reactor Building Structural Design Report**Revision #:** 2 **Type:** Engineering Report – Design**Safety Related Classification Code:** N/A **MPL No.:** U71-5010“|” Vertical Sidebar
Denotes Change

Rev #	DOORS BL	Change Number	MM/DD/YYYY	Preparing Organization	Issue / Release Status	Verification Status
0	N/A	ECO-0015264	11/10/2015	GEH	Issued for Use-Design	Verified
1	N/A	ECO-0023259	03/10/2016	GEH	Issued for Use-Design	Verified
2	N/A	ECO-0024168	04/25/2016	GEH	Issued for Use-Design	Verified

MADE BY	APPROVALS	AUTH. DATE
Gary Ehler GEH	Tanya B. Kirby GEH	11/10/2015

Public Information Notice

This is a public version of WG3-U71-ERD-S-0004, Rev 2, from which the security-related information has been removed. Portions of the document that have been removed are indicated by white space within single brackets as shown here { }. The footer of each page where security-related information is withheld carries the notation “{{{Security-Related Information - Withheld Under 10 CFR 2.390}}}.”

IMPORTANT NOTICE REGARDING CONTENTS OF THIS REPORT**Please Read Carefully**

The design, engineering, and other information contained in this document are furnished for the purpose(s) stated in the “Development Agreement between Virginia Electric and Power Company and the consortium of GE-Hitachi Nuclear Energy Americas LLC and Fluor Enterprises, Inc.” dated April 5, 2013 as amended. The use of this information by anyone other than Virginia Electric and Power Company, or for any purpose other than that for which it is furnished by GEH is not authorized; and with respect to any unauthorized use, GEH makes no representation or warranty, express or implied, and assumes no liability as to the completeness, accuracy, or usefulness of the information contained in this document, or that its use may not infringe privately owned rights.

Copyright 2016, GE-Hitachi Nuclear Energy Americas LLC, All Rights Reserved



HITACHI

WG3-U71-ERD-S-0004 SH NO. 3

REV. 2

of 543

RECORD OF REVISION

Rev #	Description
0	Initial issue
1	Incorporate comments on Rev.0
2	Incorporate comments on Rev.1

**TABLE OF CONTENTS**

1.	SCOPE	19
2.	APPLICABLE DOCUMENTS	19
2.1	Supporting and Supplemental Documents	19
2.1.1	Supporting Documents	19
2.1.2	Supplemental Documents	20
2.2	Industry Codes and Standards	20
2.3	Regulation and Regulatory Requirements	21
2.4	References	21
3.	STRUCTURAL DESCRIPTION AND GEOMETRY	21
3.1	Structural Geometry and Dimensions	21
3.2	Key Structural Elements and Descriptions	21
3.3	Floor Layout and Elevations	22
3.4	Conditions of Vicinity and Support	22
3.5	Special Structural Features	22
4.	STRUCTURAL MATERIAL REQUIREMENTS	23
4.1	Concrete	23
4.2	Reinforcement	23
4.3	Structural Steel	23
4.3.1	Carbon Steel Plate and Shapes	23
4.3.2	Stainless Steel Plate	23
4.3.3	Steel Decking	24
5.	STRUCTURAL LOADS	24
5.1	Live Loads and Dead Loads	24
5.1.1	Dead Loads	24
5.1.2	Live Loads	24
5.2	Transient Loads	25
5.2.1	Pressure Loads	25
5.2.1.1	Containment Pressure Loads	25
5.2.1.2	High Energy Line Break (HELB) Loads	26
5.2.2	Thermal Loads	26
5.2.2.1	Normal Temperatures (To)	26
5.2.2.2	Accident Temperatures (Ta)	26
5.2.3	Hydrodynamic Loads	27
5.2.3.1	Safety/Relief Valve (SRV) Loads	27
5.2.3.2	Chugging (CH) Loads	27
5.2.3.3	Condensation Oscillation (CO) Loads	27
5.2.3.4	Pool Swell	28
5.2.4	RPV Reactions due to Hydrodynamic Loads	28
5.3	Environmental Loads	28
5.3.1	Wind Loads	28
5.3.2	Tornado Loads	29



5.3.3	Seismic Loads	29
6.	STRUCTURAL ANALYSIS AND DESIGN	31
6.1	General Description	31
6.2	Stress Analysis	31
6.2.1	Analysis Program	31
6.2.2	Analysis Model	31
6.2.2.1	Outline of the Analysis Model	31
6.2.2.2	Modeling Principles	32
6.2.2.3	Modeling of the Basemat and Ground	33
6.2.2.4	Modeling of the RCCV	34
6.2.2.5	Modeling of the RCCV Liner and Sleeves	35
6.2.2.6	Modeling of the RB Pools and MS Tunnel Structures	35
6.2.2.7	Modeling of Shear Walls	35
6.2.2.8	Modeling of Floor Slabs	36
6.2.2.9	Modeling of Frame Members	36
6.2.2.10	Modeling of the Containment Internal Structures	36
6.2.2.11	Units and Material Constants	37
6.2.2.12	Boundary Conditions	37
6.2.3	Method of Applying Loads	37
6.2.3.1	Dead Load	37
6.2.3.2	Live Load	39
6.2.3.3	Pressure Load	39
6.2.3.4	Thermal Load	40
6.2.3.5	Hydrodynamic Loads	41
6.2.3.6	Reaction Loads due to Hydrodynamic Loads	41
6.2.3.7	Wind Loads	41
6.2.3.8	Tornado Loads	42
6.2.3.9	Seismic Loads	42
6.2.4	Analysis Results	47
6.3	Load Combinations	47
6.3.1	Code Requirements	47
6.3.2	Selection of Design Load Combinations	47
6.3.3	Result of Load Combination	49
6.4	Section Design Principles	50
6.4.1	Section Design of Reinforced Concrete Structures	50
6.4.1.1	Section Design for Flexure and Membrane Forces	50
6.4.1.2	Section Design for Membrane Compressive Forces	52
6.4.1.3	Section Design for Transverse Shear	53
6.4.2	Section Design of Steel Structures	54
6.4.2.1	Section Design for Axial Compression and Bending	54
6.4.2.2	Section Design for Axial Tension and Bending	55
6.4.2.3	Section Design for Transverse Shear	55
6.4.2.4	Allowable Stresses	56
7.	SUMMARY OF RESULTS	57



7.1	Required Section	57
7.2	Provided Section	57
7.3	Tabulation of Allowable Stresses versus Calculated Stresses	58
7.3.1	Reinforced Concrete Structure	58
7.3.1.1	Calculations for Flexure and Membrane Forces	58
7.3.1.2	Calculations for Membrane Compressive Forces	59
7.3.1.3	Calculations for Transverse Shear	60
7.3.2	Steel Structure	60
7.4	Missile Impact Evaluations	61
8.	CONCLUSIONS	61
Appendix A	COMPARISON WITH DCD DATA	497
Appendix B	IN-PLANE SHEAR CHECK FOR RB ACCORDING TO ACI 349-01	534
Appendix C	COMPRESSION LIMIT CHECK FOR RB ACCORDING TO ACI 349-01	540

**LIST OF TABLES**

Table 3.1-1	Key Dimensions of RB and FB	63
Table 3.1-2	Key Dimensions of RCCV	64
Table 5.1.1-1	Weights of Miscellaneous Steels and Finishing	65
Table 5.1.1-2	Miscellaneous Structures, Piping, and Commodities Attached to the RCCV	66
Table 5.1.1-3	Miscellaneous Structures, Piping, and Commodities on the Slabs	67
Table 5.1.1-4	Miscellaneous Structures, Piping, and Commodities on the RCCV Walls	68
Table 5.1.1-5	Dead Loads of Equipment, RB	69
Table 5.1.1-6	Dead Loads of Equipment, FB	70
Table 5.1.1-7	Dead Loads of Hydrostatic Loads	71
Table 5.1.2-1	Floor Live Loads	72
Table 5.1.2-2	Design Lateral Soil Pressure At-Rest	73
Table 5.2.1-1	Design Pressure Loads for Containment and IC/PCCS Pools	74
Table 5.2.1-2	Design Times for LOCAs	74
Table 5.2.2-1	Steady State Temperature Conditions	75
Table 5.2.2-2	Design Basis Accident Temperatures in Spent Fuel Pool	75
Table 5.2.4-1	RPV Reactions	76
Table 5.3.1-1	Design Wind Pressure Loads by Floor Level	77
Table 5.3.2-1	Design Pressure of Tornado Wind Load	77
Table 5.3.3-1	Effect of Containment LOCA Flooding - Standard Plant Hard Rock Site	78
Table 5.3.3-2	Design Seismic Loads for Horizontal SSE (RB and FB Walls)	79
Table 5.3.3-3	Design Seismic Loads for Horizontal SSE (RCCV)	80
Table 5.3.3-4	Design Seismic Loads for Horizontal SSE (RPV Pedestal and Vent Wall)	81
Table 5.3.3-5	Design Seismic Loads for Horizontal SSE (RSW)	82
Table 5.3.3-6	Design Seismic Loads for Horizontal SSE (RPV)	83
Table 5.3.3-7	Maximum Vertical Accelerations (RB and FB)	84
Table 5.3.3-8	Maximum Vertical Accelerations (RCCV)	84
Table 5.3.3-9	Maximum Vertical Accelerations (RPV Pedestal and Vent Wall)	85
Table 5.3.3-10	Maximum Vertical Accelerations (RSW)	85
Table 5.3.3-11	Enveloping Maximum Vertical Acceleration: RBFB Flexible Slab Oscillators	86
Table 5.3.3-12	Soil Pressure Due to an Earthquake	88
Table 5.3.3-13	Seismic Hydrodynamic Loads for GDCS Pool	89
Table 5.3.3-14	Seismic Hydrodynamic Loads for RPV Cavity / Dryer Separator / Fuel Buffer Pool	89
Table 5.3.3-15	Seismic Hydrodynamic Loads for IC / PCCS Pool	90
Table 5.3.3-16	Seismic Hydrodynamic Loads for Extension Pool A	90
Table 5.3.3-17	Seismic Hydrodynamic Loads for Extension Pool B	91
Table 5.3.3-18	Seismic Hydrodynamic Loads for Spent Fuel Pool	91
Table 5.3.3-19	RPV Reactions Due to SSE	92
Table 5.3.3-20	Enveloping Maximum Horizontal Acceleration: RBFB Wall Out-of-Plane Oscillators	92
Table 6.2.2-1	List of GA Drawings Used for Modeling	93
Table 6.2.2-2	Structural Members Considered in Analyses and Their Design	94



Table 6.2.2-3	Type of Elements Used to Model Structural Members	95
Table 6.2.2-4	Local Coordinate Systems	96
Table 6.2.2-5	Soil Spring Constants for the RB Analysis Model	97
Table 6.2.2-6	Levels of Floor Slabs Connected to the RCCV Wall	97
Table 6.2.2-7	Dimensions of Modeled Round Openings on RCCV	98
Table 6.2.2-8	Material and Thickness of the RCCV Liner	99
Table 6.2.2-9	Area of Rod Elements Used in Sleeve Models	99
Table 6.2.2-10	Dimensions of Modeled Rectangular Openings on RB Walls	99
Table 6.2.2-11	Material Constants Used in Stress Analysis	100
Table 6.2.3.2-1	Floor Live Loads	101
Table 6.2.3.3-1	Load Combinations for Design Pressure Loads	102
Table 6.2.3.4-1	Atmosphere Temperatures: Summer	103
Table 6.2.3.4-2	Atmosphere Temperatures: Winter	104
Table 6.2.3.4-3	Application of Thermal Loads: List of Indexes	105
Table 6.2.3.4-4	Thermal Loads for Shell Elements, Normal Operation: Summer	107
Table 6.2.3.4-5	Thermal Loads for Shell Elements, LOCA After 5 seconds: Summer	109
Table 6.2.3.4-6	Thermal Loads for Shell Elements, LOCA After 6 minutes: Summer	111
Table 6.2.3.4-7	Thermal Loads for Shell Elements, LOCA After 10 hours: Summer	113
Table 6.2.3.4-8	Thermal Loads for Shell Elements, LOCA After 72 hours: Summer	115
Table 6.2.3.4-9	Thermal Loads for Shell Elements, Normal Operation: Winter	117
Table 6.2.3.4-10	Thermal Loads for Shell Elements, LOCA After 5 seconds: Winter	119
Table 6.2.3.4-11	Thermal Loads for Shell Elements, LOCA After 6 minutes: Winter	121
Table 6.2.3.4-12	Thermal Loads for Shell Elements, LOCA After 10 hours: Winter	123
Table 6.2.3.4-13	Thermal Loads for Shell Elements, LOCA After 72 hours: Winter	125
Table 6.2.3.4-14	Thermal Loads for Beam Elements	127
Table 6.2.3.4-15	Thermal Loads for Rod Elements of RCCV Top Head Opening at All Seasons	127
Table 6.2.3.4-16	Design Thermal Load Labels	128
Table 6.2.3.4-17	Thermal Loads for Shell Elements around Spent Fuel Pool, 72 hours After DBA: Summer	129
Table 6.2.3.4-18	Thermal Loads for Shell Elements around Spent Fuel Pool, 72 hours After DBA: Winter	129
Table 6.2.3.4-19	Thermal Loads for Shell Elements, LOCA After 72 hours: Winter (Case 1)	130
Table 6.2.3.4-20	Thermal Loads for Shell Elements, LOCA After 72 hours: Winter (Case 2)	132
Table 6.2.3.4-21	Thermal Loads for Shell Elements, LOCA After 72 hours: Winter (Case 3)	134
Table 6.2.3.4-22	Thermal Loads for Shell Elements, LOCA After 72 hours: Winter (Case 4)	136
Table 6.2.3.7-1	Design Wind Loads (North Wind)	138
Table 6.2.3.7-2	Design Wind Loads (South Wind)	138
Table 6.2.3.7-3	Design Wind Loads (East Wind)	139
Table 6.2.3.7-4	Design Wind Loads (West Wind)	139
Table 6.2.3.8-1	Tornado Wind Loads (North Wind)	140
Table 6.2.3.8-2	Tornado Wind Loads (South Wind)	140
Table 6.2.3.8-3	Tornado Wind Loads (East Wind)	141
Table 6.2.3.8-4	Tornado Wind Loads (West Wind)	141
Table 6.2.3.8-5	Tornado Loads (Differential Pressure)	142



Table 6.2.3.9-1	Analysis Cases for Seismic Loads.....	143
Table 6.2.3.9-2	Seismic Wall Shear Area – X (N-S)-dir.	144
Table 6.2.3.9-3	Seismic Wall Shear Area – Y (E-W)-dir.	145
Table 6.2.3.9-4	Applied Shear Forces at Seismic Wall – X (N-S)-dir.	146
Table 6.2.3.9-5	Applied Shear Forces at Seismic Wall – Y(E-W)-dir.	147
Table 6.2.3.9-6	Applied Overturning Moment – RBFB X(N-S)-dir.	148
Table 6.2.3.9-7	Applied Overturning Moment – RBFB Y(E-W)-dir.	149
Table 6.2.3.9-8	Applied Overturning Moment – RCCV X(N-S)-dir.	150
Table 6.2.3.9-9	Applied Overturning Moment – RCCV Y(E-W)-dir.	151
Table 6.2.3.9-10	Applied Overturning Moment – RPV Pedestal X(N-S)-dir.	152
Table 6.2.3.9-11	Applied Overturning Moment – RPV Pedestal Y(E-W)-dir.	153
Table 6.2.3.9-12	Design Vertical Acceleration for Slabs	154
Table 6.2.3.9-13	Applied Shear Forces for Seismic Wall due to Torsional Moment.....	155
Table 6.2.3.9-14	Load Combinations for Design Seismic Loads	159
Table 6.2.3.9-15	Design Acceleration for Seismic Walls.....	160
Table 6.2.4-1	Results of NASTRAN Analysis, Dead Load	161
Table 6.2.4-2	Results of NASTRAN Analysis, Drywell Unit Pressure (1 MPa).....	162
Table 6.2.4-3	Results of NASTRAN Analysis, Wetwell Unit Pressure (1 MPa).....	163
Table 6.2.4-4	Results of NASTRAN Analysis, Thermal Load (Normal Operation: Winter) – Load Case: TLW0.....	164
Table 6.2.4-5	Results of NASTRAN Analysis, Thermal Load (LOCA After 6 minutes: Winter) – Load Case: TLW6.....	165
Table 6.2.4-6	Results of NASTRAN Analysis, Thermal Load (LOCA After 72 hours: Winter) – Load Case: TLW8 –.....	166
Table 6.2.4-7	Results of NASTRAN Analysis, Thermal Load (LOCA After 72 hours: Winter) – Load Case: TWC1 –.....	167
Table 6.2.4-8	Results of NASTRAN Analysis, Thermal Load (LOCA After 72 hours: Winter) – Load Case: TWC2 –.....	168
Table 6.2.4-9	Results of NASTRAN Analysis, Thermal Load (LOCA After 72 hours: Winter) – Load Case: TWC3 –.....	169
Table 6.2.4-10	Results of NASTRAN Analysis, Thermal Load (LOCA After 72 hours: Winter) – Load Case: TWC4 –.....	170
Table 6.2.4-11	Results of NASTRAN Analysis, Site-Specific Seismic Load (Horizontal: North to South Direction).....	171
Table 6.2.4-12	Results of NASTRAN Analysis, Site-Specific Seismic Load (Horizontal: East to West Direction).....	172
Table 6.2.4-13	Results of NASTRAN Analysis, Site-Specific Seismic Load (Vertical: Upward Direction)	173
Table 6.3.1-1	Load Combinations and Acceptance Criteria for Safety-Related Reinforced Concrete Structures.....	174
Table 6.3.1-2	Load Combinations, Load Factors and Acceptance Criteria for Reinforced Concrete Containment	175
Table 6.3.1-3	Load Combinations and Acceptance Criteria for Safety-Related Steel Structures.....	176
Table 6.3.2-1	Detail Load Combinations for RB Design	177



Table 6.3.2-2	Detail Load Combinations for Steel Structures.....	181
Table 6.3.3-1	Combined Forces and Moments, 1.05D + 1.3L + 1.3To + 1.3W: Winter – Load ID = 4021 (Selected Load Combination RB-4)	184
Table 6.3.3-2	Combined Forces and Moments, LOCA After 6 minutes (1.5Pa): Winter – Load ID = 6241 (Selected Load Combination RB-8a)	186
Table 6.3.3-3	Combined Forces and Moments, LOCA After 72 hours (1.5Pa): Winter – Load ID = 6441 (Selected Load Combination RB-8b)	190
Table 6.3.3-4	Combined Forces and Moments, LOCA After 6 minutes + SSE: Winter – Load ID = 7241 (Site-Specific Seismic Load Combination RB-9a).....	194
Table 6.3.3-5	Combined Forces and Moments, LOCA After 72 hours + SSE: Winter – Load ID = 7441 (Site-Specific Seismic Load Combination RB-9b).....	199
Table 6.4.1-1	Material Constants for Stress Calculations.....	204
Table 6.4.1-2	Allowable Stress of Concrete for Membrane Plus Bending.....	204
Table 6.4.1-3	Allowable Stress of Reinforcement for Membrane Plus Bending	205
Table 6.4.1-4	Allowable Stress of Concrete for Membrane Compressive Forces.....	205
Table 7.3.1.1-1	Sectional Thicknesses and Rebar Ratios of RB Used in the Evaluation	206
Table 7.3.1.1-3	Rebar and Concrete Stresses of RB, LOCA After 6 minutes (1.5Pa): Winter – Load ID = 6241 (Selected Load Combination RB-8a)	211
Table 7.3.1.1-4	Rebar and Concrete Stresses, of RB: LOCA After 72 hours (1.5Pa): Winter – Load ID = 6441 (Selected Load Combination RB-8b).....	213
Table 7.3.1.1-5	Rebar and Concrete Stresses of RB, LOCA After 6 minutes + SSE: Winter – Load ID = 7241 (Site-Specific Seismic Load Combination RB-9a)	215
Table 7.3.1.1-6	Rebar and Concrete Stresses of RB, LOCA After 72 hours + SSE: Winter – Load ID = 7441 (Site-Specific Seismic Load Combination RB-9b).....	217
Table 7.3.1.1-7	Maximum Stress Ratios for Flexure and Membrane Forces	219
Table 7.3.1.2-1	Membrane Compressive Forces of RB.....	221
Table 7.3.1.3-1	Transverse Shear of RB.....	222
Table 7.3.1.3-2	Transverse Shear of RB for DCD Load Combinations	223
Table 7.3.2-1	Maximum Stress Ratio of Truss Girder and Column.....	224



LIST OF FIGURES

Figure 3.1-1	RB and FB Concrete Outline Plan at EL -11,500	226
Figure 3.1-2	RB and FB Concrete Outline Plan at EL 4,650	227
Figure 3.1-3	RB and FB Concrete Outline Plan at EL 17,500	228
Figure 3.1-4	RB and FB Concrete Outline Plan at EL 27,000	229
Figure 3.1-5	RB Concrete Outline Plan at EL 34,000	230
Figure 3.1-6	RB and FB Concrete Outline N-S Section	231
Figure 3.1-7	RB and FB Concrete Outline E-W Section	232
Figure 3.2-1	Configuration of RCCV	233
Figure 3.2-2	Locations of Various Pools in RB and FB	234
Figure 5.1.1-1	Regions for Equipment Loads at EL -11,500	235
Figure 5.1.1-2	Regions for Equipment Loads at EL -6,400	236
Figure 5.1.1-3	Regions for Equipment Loads at EL -1,000	237
Figure 5.1.1-4	Regions for Equipment Loads at EL 4,650	238
Figure 5.1.1-5	Regions for Equipment Loads at EL 9,060	239
Figure 5.1.1-6	Regions for Equipment Loads at EL 13,570	240
Figure 5.1.1-7	Regions for Equipment Loads at EL 22,500	241
Figure 5.1.1-8	Regions for Equipment Loads at EL 27,000	242
Figure 5.1.1-9	Regions for Equipment Loads at/above EL 34,000	243
Figure 5.1.2-1	Snow Load	244
Figure 5.2.1-1	Envelopes of Transient Pressure Curves at DBA	245
Figure 5.2.1-2	Regions Where Pressure Loads are Applied in IC/PCCS Pools	246
Figure 5.2.2-1	Envelopes of Transient Temperature Curves - Inside RCCV at DBA	247
Figure 5.2.2-2	Envelopes of Transient Temperature Curves - Other Pools at DBA	248
Figure 5.2.2-3	Temperature Distributions in Upper Pools	249
Figure 5.2.3-1	Safety Relief Valve (SRV) Pressure Loads	250
Figure 5.2.3-2	Typical Event - Time Relationship for a DBA	251
Figure 5.2.3-3	Chugging (CH) Pressure Loads	252
Figure 5.2.3-4	Condensation Oscillation (CO) Pressure Loads	253
Figure 5.2.3-5	Pool Swell (PS) Pressure Loads	254
Figure 5.2.3-6	Pool Swell (PS) Pressure Concurrent with Froth Impact Loads	255
Figure 5.3.3-1	Dynamic Analysis Model	256
Figure 5.3.3-2	Position of Each Pool	257
Figure 6.2.2-1	FE Model of RB/FB (Whole View)	258
Figure 6.2.2-2	FE Model of RB/FB (Cut View)	259
Figure 6.2.2-3	FE Model of RCCV Liner	260
Figure 6.2.2-4	FE Model of RCCV Internal Structures	261
Figure 6.2.2-5	FE Model of the Basemat	262
Figure 6.2.2-6	FE Model of the Basemat inside the Containment	263
Figure 6.2.2-7	FE Model of the RCCV Cylinder Wall and the Wall below RCCV	264
Figure 6.2.2-8	FE Model of the RPV Pedestal Wall	265
Figure 6.2.2-9	FE Model of the Top Slab	266
Figure 6.2.2-10	FE Model of the Suppression Pool Floor Slab	267



Figure 6.2.2-11	FE Model of the RCCV Cylinder Wall Liner	268
Figure 6.2.2-12	FE Model of the RPV Pedestal Wall Liner	269
Figure 6.2.2-13	FE Model of the Basemat Liner (EL -10,400)	270
Figure 6.2.2-14	FE Model of the Suppression Pool Floor Slab Liner (EL 4,650).....	271
Figure 6.2.2-15	FE Model of the Top Slab Liner (EL 24,600).....	272
Figure 6.2.2-16	Rigid Bar Elements between Concrete and Liner	273
Figure 6.2.2-17	FE Model of Sleeve at the RCCV Top Head Opening	274
Figure 6.2.2-18	Modeled RB Pool Walls Except External Walls at EL 27,000.....	275
Figure 6.2.2-19	FE Model of the Pool Girders	276
Figure 6.2.2-20	Layout of Inner Walls Included in the Analysis Model at EL -11,500.....	277
Figure 6.2.2-21	Layout of Inner Walls Included in the Analysis Model at EL -6,400.....	278
Figure 6.2.2-22	Layout of Inner Walls Included in the Analysis Model at EL -1,000.....	279
Figure 6.2.2-23	FE Model of the External Wall (RA/FA Column Line)	280
Figure 6.2.2-24	FE Model of the External Wall (RG/FF Column Line)	281
Figure 6.2.2-25	FE Model of the External Wall (R1 Column Line).....	282
Figure 6.2.2-26	FE Model of the External Wall (R7/F1 Column Line)	283
Figure 6.2.2-27	FE Model of the External Wall (F3 Column Line)	284
Figure 6.2.2-28	FE Model of the Slab at EL 4,650.....	285
Figure 6.2.2-29	FE Model of the Slab at EL 17,500.....	286
Figure 6.2.2-30	FE Model of the Slab at EL 27,000.....	287
Figure 6.2.2-31	FE Model of the FB Frame (FB Column Line).....	288
Figure 6.2.2-32	FE Model of the FB Frame (FC Column Line).....	289
Figure 6.2.2-33	FE Model of the FB Frame (FD Column Line)	290
Figure 6.2.2-34	FE Model of the FB Frame (FE Column Line).....	291
Figure 6.2.2-35	FE Model of the FB Frame (F2 Column Line)	292
Figure 6.2.2-36	FE Model of the Roof Truss (R4 Column Line)	293
Figure 6.2.3.1-1	Equipment Loads at EL -11,500	294
Figure 6.2.3.1-2	Equipment Loads at EL -6,400	295
Figure 6.2.3.1-3	Equipment Loads at EL -1,000	296
Figure 6.2.3.1-4	Equipment Loads at EL 4,650.....	297
Figure 6.2.3.1-5	Equipment Loads at EL 9,060.....	298
Figure 6.2.3.1-6	Equipment Loads at EL 13,570.....	299
Figure 6.2.3.1-7	Equipment Loads at EL 22,500.....	300
Figure 6.2.3.1-8	Equipment Loads at EL 27,000.....	301
Figure 6.2.3.1-9	Equipment Loads at EL 34,000.....	302
Figure 6.2.3.1-10	Equipment Loads above EL 34,000	303
Figure 6.2.3.1-11	Hydrostatic Loads on the Basemat.....	304
Figure 6.2.3.1-12	Hydrostatic Loads on the Slab at EL -1,000	305
Figure 6.2.3.1-13	Hydrostatic Loads on the Suppression Pool Floor Liner	306
Figure 6.2.3.1-14	Hydrostatic Loads on the Slab at EL 27,000.....	307
Figure 6.2.3.1-15	Hydrostatic Loads on the RCCV Wall Liner	308
Figure 6.2.3.1-16	Hydrostatic Loads during LOCA Flooding on the RPV Pedestal Liner	309
Figure 6.2.3.1-17	Hydrostatic Loads during LOCA Flooding on the RCCV Liner	310
Figure 6.2.3.1-18	Hydrostatic Loads on the RA FA External Wall	311



Figure 6.2.3.1-19	Hydrostatic Loads on the RG/FF External Wall	312
Figure 6.2.3.1-20	Hydrostatic Loads on the R1 External Wall	313
Figure 6.2.3.1-21	Hydrostatic Loads on the R7/F1 External Wall	314
Figure 6.2.3.1-22	Hydrostatic Loads on the F3 External Wall	315
Figure 6.2.3.1-23	Hydrostatic Loads on the Inner Wall at EL -11,500 (1)	316
Figure 6.2.3.1-24	Hydrostatic Loads on the Inner Wall at EL -11,500 (2)	317
Figure 6.2.3.1-25	Hydrostatic Loads on the Inner Wall at EL -11,500 (3)	318
Figure 6.2.3.1-26	Hydrostatic Loads on the Inner Wall at EL -11,500 (4)	319
Figure 6.2.3.1-27	Hydrostatic Loads on the Pool Girder	320
Figure 6.2.3.1-28	Hydrostatic Loads on the Inner Wall at EL 27,000 (RB)	321
Figure 6.2.3.1-29	Hydrostatic Loads on the Inner Wall at EL 27,000 (RF)	322
Figure 6.2.3.1-30	Hydrostatic Loads on the Inner Wall at EL 27,000 (R2)	323
Figure 6.2.3.1-31	Hydrostatic Loads on the Inner Wall at EL 27,000 (R6)	323
Figure 6.2.3.1-32	Hydrostatic Loads on the Inner Wall at EL 27,000 (1)	324
Figure 6.2.3.1-33	Hydrostatic Loads on the Inner Wall at EL 27,000 (2)	325
Figure 6.2.3.1-34	Hydrostatic Loads during LOCA Flooding on the Basemat Liner	326
Figure 6.2.3.1-35	Hydrostatic Loads during LOCA Flooding on the Suppression Pool Liner	327
Figure 6.2.3.2-1	Floor Live Load Enveloped Snow Drift Load for Lower Roofs	328
Figure 6.2.3.2-2	Floor Live Load (FB EL 22,500)	329
Figure 6.2.3.2-3	Lateral Soil Pressure Load at Rest (Basemat)	330
Figure 6.2.3.2-4	Lateral Soil Pressure Load at Rest (RA/FA External Wall)	331
Figure 6.2.3.2-5	Lateral Soil Pressure Load at Rest (RG/FF External Wall)	332
Figure 6.2.3.2-6	Lateral Soil Pressure Load at Rest (R1 External Wall)	333
Figure 6.2.3.2-7	Lateral Soil Pressure Load at Rest (F3 External Wall)	334
Figure 6.2.3.3-1	Containment Pressure Loads - Drywell Unit Pressure	335
Figure 6.2.3.3-2	Containment Pressure Loads - Wetwell Unit Pressure	336
Figure 6.2.3.3-3	Containment Pressure Load (Drywell: RCCV Liner)	337
Figure 6.2.3.3-4	Containment Pressure Load (Drywell: RPV Pedestal Liner)	338
Figure 6.2.3.3-5	Containment Pressure Load (Drywell: Basemat Liner)	339
Figure 6.2.3.3-6	Containment Pressure Load (Drywell: Top Slab Liner)	340
Figure 6.2.3.3-7	Containment Pressure Load (Wetwell: RCCV Liner)	341
Figure 6.2.3.3-8	Containment Pressure Load (Wetwell: Suppression Pool Slab Liner)	342
Figure 6.2.3.3-9	Containment Pressure Load (IC/PCCS Pool: Slab at EL 27,000)	343
Figure 6.2.3.3-10	Containment Pressure Load (IC/PCCS Pool: Slab at EL 34,000)	344
Figure 6.2.3.3-11	Containment Pressure Load (IC/PCCS Pool: External Wall RA)	345
Figure 6.2.3.3-12	Containment Pressure Load (IC/PCCS Pool: External Wall RG)	346
Figure 6.2.3.3-13	Containment Pressure Load (IC/PCCS Pool: External Wall R1)	347
Figure 6.2.3.3-14	Containment Pressure Load (IC/PCCS Pool: Wall RB)	348
Figure 6.2.3.3-15	Containment Pressure Load (IC/PCCS Pool: Wall RF)	349
Figure 6.2.3.3-16	Containment Pressure Load (IC/PCCS Pool: Wall R2)	350
Figure 6.2.3.3-17	Containment Pressure Load (IC/PCCS Pool: Wall R6)	351
Figure 6.2.3.3-18	Containment Pressure Load (IC/PCCS Pool: Pool Girder)	352
Figure 6.2.3.3-19	Containment Pressure Load (IC/PCCS Pool: Wall-1)	353
Figure 6.2.3.3-20	Containment Pressure Load (IC/PCCS Pool: Wall-2)	354



Figure 6.2.3.3-21	HELB Pressure Load (MS Tunnel: Slab at EL 17,500).....	355
Figure 6.2.3.3-22	HELB Pressure Load (MS Tunnel: Slab at EL 27,000).....	356
Figure 6.2.3.3-23	HELB Pressure Load (MS Tunnel: RCCV Wall).....	357
Figure 6.2.3.3-24	HELB Pressure Load (MS Tunnel: Walls)	358
Figure 6.2.3.3-25	HELB Pressure Load (for RB General Rooms: R1 Wall)	359
Figure 6.2.3.3-26	HELB Pressure Load (for RB General Rooms: R7 Wall)	360
Figure 6.2.3.3-27	HELB Pressure Load (for RB General Rooms: RB Wall).....	361
Figure 6.2.3.3-28	HELB Pressure Load (for RB General Rooms: RF Wall).....	362
Figure 6.2.3.3-29	HELB Pressure Load (for RB General Rooms: Roof).....	363
Figure 6.2.3.3-30	HELB Pressure Load (for FB General Rooms: F3 Wall)	364
Figure 6.2.3.3-31	HELB Pressure Load (for FB General Rooms: FA Wall)	365
Figure 6.2.3.3-32	HELB Pressure Load (for FB General Rooms: FF Wall).....	366
Figure 6.2.3.3-33	HELB Pressure Load (for FB General Rooms: Slab at EL 22500)	367
Figure 6.2.3.4-1	Application of Thermal Load on the RCCV Wall (Normal Operation)	368
Figure 6.2.3.4-2	Application of Thermal Load on the RCCV Wall (LOCA Condition 1).....	369
Figure 6.2.3.4-3	Application of Thermal Load on the RCCV Wall (LOCA Condition 2).....	370
Figure 6.2.3.4-4	Application of Thermal Load on the RCCV Wall (LOCA Flooding Condition 3)	371
Figure 6.2.3.4-5	Application of Thermal Load on the External Wall (RA/FA)	372
Figure 6.2.3.4-6	Application of Thermal Load on the External Wall (RG/FF).....	373
Figure 6.2.3.4-7	Application of Thermal Load on the External Wall (RB).....	374
Figure 6.2.3.4-8	Application of Thermal Load on the External Wall (RF)	375
Figure 6.2.3.4-9	Application of Thermal Load on the External Wall (R1)	376
Figure 6.2.3.4-10	Application of Thermal Load on the External Wall (R7/F1).....	377
Figure 6.2.3.4-11	Application of Thermal Load on the External Wall (F3).....	378
Figure 6.2.3.4-12	Application of Thermal Load on the Basemat	379
Figure 6.2.3.4-13	Application of Thermal Load on the Basemat (during LOCA Flooding).....	380
Figure 6.2.3.4-14	Application of Thermal Load on the Slab (EL 4,650)	381
Figure 6.2.3.4-15	Application of Thermal Load on the Slab (EL 17,500)	382
Figure 6.2.3.4-16	Application of Thermal Load on the Slab (EL 27,000)	383
Figure 6.2.3.4-17	Application of Thermal Load on the Slab (EL 34,000)	384
Figure 6.2.3.4-18	Application of Thermal Load on the Spent Fuel Pool Wall-1	385
Figure 6.2.3.4-19	Application of Thermal Load on the Spent Fuel Pool Wall-2	386
Figure 6.2.3.4-20	Application of Thermal Load on the Spent Fuel Pool Wall-3	387
Figure 6.2.3.4-21	Application of Thermal Load on the MS Tunnel Wall	388
Figure 6.2.3.4-22	Application of Thermal Load on the Pool Girder	389
Figure 6.2.3.4-23	Application of Thermal Load on the IC/PCCS Pool Wall-1 (1).....	390
Figure 6.2.3.4-24	Application of Thermal Load on the IC/PCCS Pool Wall-1(2).....	391
Figure 6.2.3.4-25	Application of Thermal Load on the IC/PCCS Pool Wall-5 (R2)	392
Figure 6.2.3.4-26	Application of Thermal Load on the IC/PCCS Pool Wall-6 (R6)	393
Figure 6.2.3.4-27	Application of Thermal Load on the RCCV Liner (Normal Operation)	394
Figure 6.2.3.4-28	Application of Thermal Load on the RCCV Liner (Condition 1).....	395
Figure 6.2.3.4-29	Application of Thermal Load on the RCCV Liner (Condition 2).....	396
Figure 6.2.3.4-30	Application of Thermal Load on the RCCV Liner (Condition 3).....	397



Figure 6.2.3.4-31 Application of Thermal Load on the Reinforced Concrete Girder and Column (EL -11.500).....	398
Figure 6.2.3.4-32 Application of Thermal Load on the Reinforced Concrete Girder and Column (EL -6.400).....	399
Figure 6.2.3.4-33 Application of Thermal Load on the Reinforced Concrete Girder and Column (EL -1.000).....	400
Figure 6.2.3.4-34 Application of Thermal Load on the Reinforced Concrete Girder and Column (EL 4,650).....	401
Figure 6.2.3.4-35 Application of Thermal Load on the Reinforced Concrete Girder and Column (EL 9,060).....	402
Figure 6.2.3.4-36 Application of Thermal Load on the Reinforced Concrete Girder and Column (EL 13,570).....	403
Figure 6.2.3.5-1 Application of Hydrodynamic Load on the RCCV Liner (SRV Positive).....	404
Figure 6.2.3.5-2 Application of Hydrodynamic Load on the Suppression Pool Slab Liner (SRV Positive).....	405
Figure 6.2.3.5-3 Application of Hydrodynamic Load on the RCCV Liner (SRV; Negative).....	406
Figure 6.2.3.5-4 Application of Hydrodynamic Load on the Suppression Pool Slab Liner (SRV Negative).....	407
Figure 6.2.3.5-5 Application of Hydrodynamic Load on the RCCV Liner (CH Positive).....	408
Figure 6.2.3.5-6 Application of Hydrodynamic Load on the Suppression Pool Slab Liner (CH Positive).....	409
Figure 6.2.3.5-7 Application of Hydrodynamic Load on the RCCV Liner (CH; Negative).....	410
Figure 6.2.3.5-8 Application of Hydrodynamic Load on the Suppression Pool Slab Liner (CH Negative).....	411
Figure 6.2.3.5-9 Application of Hydrodynamic Load on the RCCV Liner (CO Positive/Negative).....	412
Figure 6.2.3.5-10 Application of Hydrodynamic Load on the Suppression Pool Slab Liner (CO Positive/Negative).....	413
Figure 6.2.3.5-11 Application of Hydrodynamic Load on the RCCV Liner (PS).....	414
Figure 6.2.3.5-12 Application of Hydrodynamic Load on the RPV Pedestal Liner (PS).....	415
Figure 6.2.3.5-13 Application of Hydrodynamic Load on the Basemat Liner (PS).....	416
Figure 6.2.3.5-14 Application of Hydrodynamic Load on the Suppression Pool Slab Liner (PS).....	417
Figure 6.2.3.5-15 Application of Hydrodynamic Load on the Top Slab Liner (PS).....	418
Figure 6.2.3.5-16 Application of Hydrodynamic Load on the RCCV Liner (PS: Pressure Concurrent with Froth Impact Loads).....	419
Figure 6.2.3.5-17 Application of Hydrodynamic Load on the RPV Pedestal Liner (PS: Pressure Concurrent with Froth Impact Loads).....	420
Figure 6.2.3.5-18 Application of Hydrodynamic Load on the Basemat Liner (PS: Pressure Concurrent with Froth Impact Loads).....	421
Figure 6.2.3.5-19 Application of Hydrodynamic Load on the Suppression Pool Slab Liner (PS: Pressure Concurrent with Froth Impact Loads).....	422
Figure 6.2.3.5-20 Application of Hydrodynamic Load on the Top Slab Liner (PS: Pressure Concurrent with Froth Impact Loads).....	423
Figure 6.2.3.9-1 Seismic Load Directions in the Stress Analysis.....	424



Figure 6.2.3.9-2	Calculation of Applied Shear Forces and Moments	425
Figure 6.2.3.9-3	Inner Walls Where Shear Force Are Applied - EL -11,500~EL-6,400	426
Figure 6.2.3.9-4	Inner Walls Where Shear Force Are Applied - EL-6,400~EL-1,000	427
Figure 6.2.3.9-5	Inner Walls Where Shear Force Are Applied - EL-1,000~EL4,650.....	428
Figure 6.2.3.9-6	Distribution of Seismic Shear Forces.....	429
Figure 6.2.3.9-7	Method of Applying Overturning Moments	430
Figure 6.2.3.9-8	Application of Overturning Moments to the RCCV and Wall below RCCV.....	431
Figure 6.2.3.9-9	Application of Overturning Moments to the RPV Pedestal.....	432
Figure 6.2.3.9-10	Application of Overturning Moments to the External Wall on R1 Column Line	433
Figure 6.2.3.9-11	Application of Overturning Moments to the External Wall on R7 Column Line	434
Figure 6.2.3.9-12	Application of Overturning Moments to the External Wall on F3 Column Line	435
Figure 6.2.3.9-13	Application of Overturning Moments to the External Wall on RA Column Line	436
Figure 6.2.3.9-14	Application of Overturning Moments to the External Wall on RG Column Line	437
Figure 6.2.3.9-15	Application of Overturning Moments to the External Wall on RB Column Line	438
Figure 6.2.3.9-16	Application of Overturning Moments to the External Wall on RF Column Line	439
Figure 6.2.3.9-17	Application of Overturning Moments to the Pool Girders.....	440
Figure 6.2.3.9-18	Method of Applying Overturning Moments to the Top of RCCV.....	441
Figure 6.2.3.9-19	Calculation Method of Input Torsional Moment	442
Figure 6.2.3.9-20	Calculation Method of Shear Forces due to Torsional Moment	443
Figure 6.2.3.9-21	Soil Pressure Due to N-S Direction Earthquake on the Basemat.....	444
Figure 6.2.3.9-22	Soil Pressure Due to N-S Direction Earthquake on the External Wall (R1 Column Line).....	445
Figure 6.2.3.9-23	Soil Pressure Due to N-S Direction Earthquake on the External Wall (F3 Column Line).....	446
Figure 6.2.3.9-24	Soil Pressure Due to E-W Direction Earthquake on the Basemat	447
Figure 6.2.3.9-25	Soil Pressure Due to E-W Direction Earthquake on the External Wall (RA/FA Column Line).....	448
Figure 6.2.3.9-26	Soil Pressure Due to E-W Direction Earthquake on the External Wall (RG/FF Column Line).....	449
Figure 6.2.4-1	Section Deformation for Dead Load	450
Figure 6.2.4-2	Section Deformation for Drywell Unit Pressure	451
Figure 6.2.4-3	Section Deformation for Wetwell Unit Pressure (1 MPa)	452
Figure 6.2.4-4	Section Deformation for Thermal Load (Normal Operation: Winter).....	453
Figure 6.2.4-5	Section Deformation for Thermal Load (LOCA After 6 minutes: Winter).....	454
Figure 6.2.4-6	Section Deformation for Thermal Load (LOCA After 72 hours: Winter).....	455
Figure 6.2.4-7	Section Deformation for Thermal Load (Normal Operation: Summer)	456
Figure 6.2.4-8	Section Deformation for Thermal Load (LOCA After 6 minutes: Summer)....	457



Figure 6.2.4-9	Section Deformation for Thermal Load (LOCA After 72 hours: Summer)	458
Figure 6.2.4-10	Section Deformation for Seismic Load (Horizontal: North to South)	459
Figure 6.2.4-11	Section Deformation for Seismic Load (Horizontal: East to West)	460
Figure 6.2.4-12	Section Deformation for Seismic Load (Vertical: Upward)	461
Figure 6.2.4-13	Section Deformation for Soil Pressure Due to an Earthquake (N-S)	462
Figure 6.2.4-14	Section Deformation for Soil Pressure Due to an Earthquake (E-W)	463
Figure 6.2.4-15	Section Deformation for Wind Load (North Wind)	464
Figure 6.2.4-16	Section Deformation for Wind Load (South Wind)	465
Figure 6.2.4-17	Section Deformation for Wind Load (East Wind)	466
Figure 6.2.4-18	Section Deformation for Wind Load (West Wind)	467
Figure 6.2.4-19	Section Deformation for Tornado Load (North Wind)	468
Figure 6.2.4-20	Section Deformation for Tornado Load (South Wind)	469
Figure 6.2.4-21	Section Deformation for Tornado Load (East Wind)	470
Figure 6.2.4-22	Section Deformation for Tornado Load (West Wind)	471
Figure 6.2.4-23	Section Deformation for Tornado Load (Differential Pressure)	472
Figure 6.2.4-24	Elements Selected for Tabulation (Wall below RCCV)	473
Figure 6.2.4-25	Elements Selected for Tabulation (External Wall R1)	474
Figure 6.2.4-26	Elements Selected for Tabulation (External Wall R7/F1)	475
Figure 6.2.4-27	Elements Selected for Tabulation (External Wall RA FA)	476
Figure 6.2.4-28	Elements Selected for Tabulation (Basemat)	477
Figure 6.2.4-29	Elements Selected for Tabulation (Slab at EL 4,650)	478
Figure 6.2.4-30	Elements Selected for Tabulation (Slab at EL 17,500)	479
Figure 6.2.4-31	Elements Selected for Tabulation (Slab at EL 27,000)	480
Figure 6.2.4-32	Elements Selected for Tabulation (Pool Girder)	481
Figure 6.2.4-33	Elements Selected for Tabulation (MS Tunnel Wall)	482
Figure 6.2.4-34	Elements Selected for Evaluation (IC/PCCS Pool in NS Direction)	483
Figure 6.2.4-35	Force and Moment in Shell Element	484
Figure 6.4.1-1	Flow Chart of Design for Reinforced Concrete Structures	485
Figure 6.4.1-2	Calculation of Shear Strength Provided by Concrete	486
Figure 6.4.1-3	Comparison of Bending Moment-Axial Force (P-M) Interactions	487
Figure 6.4.2-1	Allowable Stress of W-shaped Members (Strong Axis Bending)	488
Figure 6.4.2-2	Allowable Stress of W-shaped Members (Weak Axis Bending)	489
Figure 6.4.2-3	Allowable Bending Stress of Box Members	490
Figure 7.1-1	Reinforcing Steel of Foundation Mat: Plan	491
Figure 7.1-2	Reinforcing Steel of Foundation Mat: Section A-A	492
Figure 7.1-3	Reinforcing Steel of IC/PCCS Pool Girder	493
Figure 7.1-4	List of RB Wall and Slab Reinforcement	494
Figure 7.1-5	RB Roof Truss Structural Steel Member	495
Figure 7.3.2-1	Elements Selected for Tabulation - RB Roof Truss and Supporting Column on R4 Column Line	496

**LIST OF ACRONYM**

CB	Control Building
CH	Chugging
CO	Condensation Oscillation
DBA	Design Basis Accident
DCD	Design Control Document
DF	Diaphragm Floor
DLF	Dynamic Load Factor
DW	Drywell
ESBWR	Economic Simplified Boiling Water Reactor
EW	East-West
FB	Fuel Building
FE	Finite Element
FAPCS	Fuel and Auxiliary Pools Cooling System
FWSC	Firewater Service Complex
GDCS	Gravity-Driven Cooling System
HELB	High Energy Line Break
IC	Isolation Condenser
IC/PCCS	Isolation Condenser/Passive Core Cooling System
LOCA	Loss of Coolant Accident
MS	Main Steam
NA3	North Anna Unit 3
NI	Nuclear Island
NS	North-South
PCCS	Passive Containment Cooling System
PID	Element Property ID
PS	Pool Swell
RB	Reactor Building
RB/FB	Reactor/Fuel Building Complex
RCCV	Reinforced Concrete Containment Vessel
RG	Regulatory Guides
RPV	Reactor Pressure Vessel
RSW	Reactor Shield Wall
S/P	Suppression Pool
SRP	Standard Review Plan
SRSS	Square Root of the Sum of the Squares
SRV	Safety Relief Valve
SSE	Safe Shutdown Earthquake
SSI	Soil-Structure Interaction
VW	Vent Wall
WW	Wetwell



1. SCOPE

The objective of this report is to document the North Anna Unit 3 (NA3) site-specific structural design evaluation of the Economic Simplified Boiling Water Reactor (ESBWR) Reactor Building (RB) for the site-specific seismic load demands that exceed the seismic loads used for the standard design of the RB structure. The scope of the evaluation is the analysis and stress checks of the RB structure for site-specific seismic loads in combination with other design loads in critical seismic load combinations. The analysis is performed using the same NASTRAN model used for the standard design of the RB structure in Reference 2.1.2-e. The design loads applied to the model are the same as those considered in the standard design except for the site-specific Safe Shutdown Earthquake (SSE) loads that are obtained from Reference 2.1.2-k. The NA3 site-specific SSE loads are combined with non-seismic standard plant loads following the same standard design analysis methodology and acceptance criteria.

It should be noted that the Reinforced Concrete Containment Vessel (RCCV) is enclosed within the RB, but the design of the RCCV is out-of-scope of this report. The design results of the RCCV are described in WG3-T11-DRD-S-0001 "RCCV Structural Design Report," Reference 2.1.2-m. Stability checks are performed in WG3-U71-ERD-S-0003 "Reactor/Fuel Building Complex Stability Analysis Report," Reference 2.1.2-h.

2. APPLICABLE DOCUMENTS

2.1 Supporting and Supplemental Documents

2.1.1 Supporting Documents

	<u>MPL No.</u>
a. 26A6558, "General Civil Design Criteria", Revision 4	A40-4010
b. 26A6605, "Design Specification of Concrete Containment", Revision 4	T11-4010
c. 26A6606, "Design Specification for Reactor Building", Revision 2	U71-4010
d. 26A6608, "Design Specification for Fuel Building", Revision 2	U97-4010
e. 105E3908, "ESBWR Nuclear Island General Arrangement Drawing", Revision 5	A12-2010
f. 26A6649, "RB/FB Heat Transfer Analysis Report", Revision 3	U71-5060
g. eDRF Section 0000-0102-0965 R0, Deliverable to Structural Group for Steady State Heat Transfer and Stress Analysis	

**2.1.2 Supplemental Documents**MPL No.

- a. 26A6642AL, "ESBWR Design Control Document Tier 2 Chapter 3 Appendices 3A – 3F", Revision 10
- b. 26A6642AN, "ESBWR Design Control Document Tier 2 Chapter 3 Appendices 3G – 3L", Revision 10
- c. DE-ES-0083, "Seismic Load Data for North Anna 3 from HGNE Analysis", Revision 0
- d. 26A6650, "ESBWR RCCV Structural Design Report", Revision 5
T11-5010
- e. 26A6651, "ESBWR Reactor Building Structural Design Report", Revision 5
U71-5010
- f. 26A6655, "ESBWR Fuel Building Structural Design Report", Revision 5
U97-5010
- g. WG3-U71-ERD-S-0001, "North Anna 3 Reactor/Fuel Building Complex Seismic Analysis Report", Revision 4
- h. WG3-U71-ERD-S-0003, "North Anna 3 Reactor/Fuel Building Complex Stability Analysis Report", Revision 1
- i. SER-DMN-011, "Benchmarking of SASSI2010 MSM Results from NA3 Site-Specific SSI Analysis", Revision 1
- j. TODI WG3-A25-TDI-S-0004, "North Anna 3 RB/FB, CB & FWSC SSI Analyses EPRI 2013 GMPE Based Inputs", Revision 0
- k. SER-DMN-019 "RB/FB Seismic Analyses Bounding Results and In-Structure Response Spectra", Revision 1
- l. 26A6661, "Structural Design Report for Containment Internal Structures", Revision 2, MPL No. T12-5010
- m. WG3-T11-DRD-S-0001, "North Anna 3 RCCV Structural Design Report", Revision 2
- n. WG3-U97-ERD-S-0001, "North Anna 3 FB Structural Design Report", Revision 2
- o. 26A6647, "ESBWR Reactor/Fuel Building Complex Seismic Analysis Report", Revision 7
U71-5040

2.2 Industry Codes and Standards

- a. ACI 349-01/349R-01: Code Requirements for Nuclear Safety Related Concrete Structures and Commentary
- b. ASME BPVC Sec III 2004: BPVC Section III, Division 2, Code for Concrete ASME BPVC Sec III 2004: BPVC Section III, Division 2, Code for Concrete
- c. ANSI/AISC N690-1994 (R2004) & S2: Specification for the Design, Fabrication and Erection of Steel Safety-Related Structures for Nuclear Facilities and Supplement No. 2
- d. ASCE 7-02: Minimum Design Loads for Buildings and Other Structures
- e. ASCE 4-98: Seismic Analysis of Safety-Related Nuclear Structures



2.3 Regulation and Regulatory Requirements

- a. NUREG-0800 "Standard Review Plan for Review of Safety Analysis Reports for Nuclear Power Plants - LWR Edition", Revision 4

2.4 References

- a. A Review of Procedure for the Analysis and Design of Concrete Structures to Resist Missile Impact Effects, R.P. Kennedy, Holmes and Narver, Inc. (Nuclear Engineering and Design article Vol. 37 1976, pages 183-203)
- b. Topical Report, Design of Structures for Missile Impact, Bechtel Power Corp., BC-TOP-9A Revision 2, September 1974
- c. Topical Report, Tornado and Extreme Wind Design Criteria for Nuclear Power Plants, Bechtel Power Corp., BC-TOP-3A, Revision 3, August 1974

3. STRUCTURAL DESCRIPTION AND GEOMETRY

3.1 Structural Geometry and Dimensions

The RB is a safety-related and Seismic Category I structure. It shares a common basemat with the RCCV and the Fuel Building (FB). The RCCV is fully enclosed within the RB.

The RB is a rigid box-shape building, and its key dimensions are summarized in Table 3.1-1. The key dimensions of the RCCV are summarized in Table 3.1-2. Floor plans and sections of the RB are shown in Figures 3.1-1 through 3.1-7.

3.2 Key Structural Elements and Descriptions

The RB structure consists of the following areas that are not part of the containment structure.

- The basemat is a reinforced concrete slab that functions as a common foundation for the R/B including the RCCV and FB structures. Though the thickness of most of the basemat is 4.0 m, the thickness is increased to 5.1m at the inside Reactor Pressure Vessel (RPV) pedestal and 5.5m at the bottom of the Spent Fuel Pool.
- RB super structure at and above the refueling floor, up to the support for the bridge crane, including the roof, is made of reinforced concrete floors and walls. Roof trusses and their supporting columns are made of structural steel.
- Passive Containment Cooling System (PCCS) and Isolation Condenser (IC) heat exchanger pools, the separator/dryer storage pool, the reactor cavity, the buffer pool, and including the standby liquid control pressure vessel rooms.
- Rooms at several elevation levels outside the containment but attaching to the containment structure.
- The main steam tunnel that consists of reinforced concrete walls and floor.



The RCCV structure boundary consists of the containment Top Slab with removable Drywell Head, the containment cylindrical wall that is also the external wall of the suppression pool, the suppression pool floor slab, the RPV pedestal that encloses the volume under the RPV, and the basemat. The RCCV and the RB structure are integrated by the pool girders at the top of the containment and by floors at EL -6,400, EL -1,000, EL 4,650, EL 9,060, EL 13,570, EL 17,500 and EL 27,000. The configuration of the RCCV is shown in Figure 3.2-1.

Figure 3.2-2 shows the locations of various pools in the RB and FB.

The NA3 site-specific seismic demands for sliding stability can be solved without shear key as shown in the NA3 RB/FB Stability Analysis Report, Reference 2.1.2-h. Therefore, shear key design is not contained in this report. The same shear keys as described in Reference 2.1.2-e are provided under the basemat for NA3.

3.3 Floor Layout and Elevations

Floor layouts and sections of the RB are shown in Figures 3.1-1 through 3.1-7. The RB is a nine-story building with rectangular-shaped floor plans. The RB structure is partially embedded with the top of basemat 16.0 meters below grade.

3.4 Conditions of Vicinity and Support

In the ESBWR NA3 site-specific design, the buildings including the RB are designed under the condition that they are supported by the foundation soil that has the following properties corresponding to the Soft Site conditions described in Reference 2.1.2-e. The soft site conditions are conservative for the NA3 rock site because softer soils lead to larger structural deformations.

- Shear wave velocity: 300 m/s
- Unit weight: 0.0196 MN/m^3 (2.00 t/m^3)
- Shear modulus: 180 MN/m^2 ($1.835 \times 10^4 \text{ t/m}^2$)
- Poisson's Ratio: 0.478

3.5 Special Structural Features

The RB has the following structural features.

- The RB is rigidly connected to the RCCV with pool girders and floor slabs. Therefore, it is necessary to consider the loads applied in the RCCV, such as pressure loads and thermal loads, for the structural design of the RB structures.
- Frame members are not installed in the RB except for roof trusses and steel columns which support trusses. The roof trusses and supporting columns are located at the stories above EL 34,000.



4. STRUCTURAL MATERIAL REQUIREMENTS

4.1 Concrete

The specified compressive strengths, f'_c , of the concrete at 28 days, or earlier, are as follows.

- Basemat: 27.6 MPa (4,000 psi)
- Top Slab: 41.4 MPa (6,000 psi)
- Others: 34.5 MPa (5,000 psi)

4.2 Reinforcement

Reinforcing steel is deformed billet steel conforming to ASTM A-615 grade 60. Minimum yield strength, F_y , is 413.6 MPa (60,000 psi).

4.3 Structural Steel

4.3.1 Carbon Steel Plate and Shapes

Structural steel and fasteners of the RB conform to the following:

- Structural Steel: ASTM A572 Gr.50 (for Column, Girder, etc.)
ASTM A36
- High strength bolts: ASTM A325 or A490
- Anchor bolts (rods): ASTM A36 or A307
- Steel floor decking: ASTM A446 with minimum $f_y = 228$ MPa (33 ksi)
- Studs: ASTM A108
- Pipe material: ASTM A333 Gr. 1 or 6, and A312 tp 304L or 316L
- Forgings: ASTM A 350 Gr. LF1 or LF2, and A182 Type F304L/316L

Steels used for the RCCV internal structures are as follows:

- Diaphragm Floor: ASTM A572 or A709 HPS 70W
- RPV Support Bracket: ASTM A516 or A709 HPS 70W
- Vent Wall: ASTM A572 or A709 HPS 70W
- GDCS Pool: ASTM A572 or A709 HPS 70W

4.3.2 Stainless Steel Plate

Stainless steel plate or clad plate conform to ASTM A-240 Type 304L.



4.3.3 Steel Decking

Steel floor and roof decks conform to ASTM A446, Grade A, galvanized.

5. STRUCTURAL LOADS

As described later in Section 6.2, stress analyses of the RB are performed using a Finite Element (FE) analysis model that includes the RB, RCCV, and FB since they are integrated into one building. Therefore, in the following subsections, the loads applied to the RB as well as the RCCV and FB are described.

5.1 Live Loads and Dead Loads

5.1.1 Dead Loads

The following four kinds of dead loads are considered in the structural design of the RB.

Structural Weight

The weight of structures such as roof, floors, walls and steel framing (columns, girders and trusses) are calculated using the following unit weights.

- reinforced concrete: 23.5 kN/m³
- plain concrete: 22.5 kN/m³
- steel: 77.0 kN/m³

Miscellaneous Structures, Piping, and Commodity Loads

Table 5.1.1-1 shows the weights of the miscellaneous steels including roof trusses, finishings, and various pool liners in the RB and FB. The weights of the liner inside the containment and hatch attached to the containment are shown in Table 5.1.1-2.

Tables 5.1.1-3 and 5.1.1-4 show design loads of miscellaneous structures, piping, and commodities applied to the floor slabs and RCCV wall, respectively.

Equipment Loads

Weights of equipment located on the RB and FB slabs are summarized in Tables 5.1.1-5 and 5.1.1-6, and Figures 5.1.1-1 through 5.1.1-9. Please note that the building configurations in these figures are not exactly consistent with the latest General Agreement (GA) drawings.

Pool Water Hydrostatic Loads

The vertical and lateral pressures of liquids in pools are treated as hydrostatic loads on the walls and floors of pools. Table 5.1.1-7 lists the depths of pool water and the maximum design hydrostatic loads in the various pools.

5.1.2 Live Loads

The following three kinds of live loads are considered in the structural design of the RB.

Floor Live Loads



Table 5.1.2-1 shows the floor live loads distributed on the RB floor slabs. Floor live loads are reduced to 0.25 of their values when used in the evaluation of seismic loads. The live load inside the RCCV is zero since the containment is inaccessible. Floor live loads at the roof are enveloping snow load.

Snow Loads

Snow load for flat roof is taken as 2.4 kN/m^2 (50 psf), uniformly. For the lower roofs, i.e., RB roof at EL 34,000 and FB roof at EL 27,500, the snow drift loads are additionally considered as shown in Figure 5.1.2-1. Their values are calculated based on ASCE 7-02, Reference 2.2-d.

Lateral Soil Pressure

The static lateral soil pressure loads, which are shown in Table 5.1.2-2, are applied to the external walls below grade. Evaluations of lateral soil pressures are described in Appendix B in Reference 2.1.2-e. The at-rest lateral pressures are for generic sites considered in the standard design and they are larger than the NA3 site-specific static lateral pressures and conservatively used for NA3.

5.2 Transient Loads

5.2.1 Pressure Loads

5.2.1.1 Containment Pressure Loads

The containment pressure loads that act on the inner surfaces of the RCCV and IC/PCCS pools during normal operation, tests, and a Loss of Coolant Accident (LOCA) are considered. Figure 5.2.1-1 show the transient curves representing the pressure envelopes for the Design Basis Accident (DBA). Figure 5.2.1-2 shows the regions where the pressure loads are applied in the IC/PCCS pools.

The following events are considered for determining the design pressure loads. Table 5.2.1-1 shows their values.

1. Normal operation
2. Test – maximum internal pressure
3. Test – maximum differential pressure
4. LOCA – 5 seconds after DBA
5. LOCA – 6 minutes after DBA
6. LOCA – 10 hours after DBA
7. LOCA – 72 hours after DBA

The pressure loads during a LOCA are defined for various times after an accident and are determined from the time history curves of temperature and pressure conditions for several parts of the RCCV. Table 5.2.1-2 gives the reasons why the above four LOCA times are selected.



5.2.1.2 High Energy Line Break (HELB) Loads

The pressure loads due to High Energy Line Break (HELB) is as follows.

- Main Steam Tunnel : 76.0 kPag (11 psig)
- RWCU / Shutdown Cooling Valve Rooms A thru D, RWCU / Shutdown Cooling Heat Exchanger Rooms A thru D, Corridors A thru D and Commodity Chases A thru D: 34.5 kPag (5 psig)
- All Other Rooms in RB and FB Outside Containment: 14.0 kPag (2 psig)

5.2.2 Thermal Loads

5.2.2.1 Normal Temperatures (To)

The following operational states are considered for determining the normal thermal loads. Table 5.2.2-1 shows the steady state temperature conditions for each of the following states and for each part of the RB.

1. Normal operation – Summer and Winter

The thermal loads are specified, for stress analyses, as average temperatures, T_d , and temperature differences, T_g . They are in turn obtained from equivalent linearization of heat transfer analysis results. For normal temperatures, steady state heat transfer analyses are performed using the temperature conditions shown in Table 5.2.2-1.

The stress-free design temperature used in the stress analyses is 15.5 °C.

As for heat transfer analyses, refer to U71-5060 "RB FB Heat Transfer Analysis Report", Reference 2.1.1-f.

5.2.2.2 Accident Temperatures (Ta)

The following conditions are considered for defining the accident thermal loads. The conditions are determined from the time history curves of temperatures and pressures at several parts of each structure.

(1) RCCV

Figures 5.2.2-1 and 5.2.2-2 show the envelopes of transient temperatures during a LOCA.

1. LOCA – 5 seconds after DBA, Summer and Winter
2. LOCA – 6 minutes after DBA, Summer and Winter
3. LOCA – 10 hours after DBA, Summer and Winter
4. LOCA – 72 hours after DBA, Summer and Winter

The reasons why the above events are selected as the design loads are described in Table 5.2.1-2.

The structural evaluation for TRACG, GEH proprietary version of the Transient Reactor Analysis Code, calculated LOCA temperature provided in Reference 2.1.1-g is described



in Appendix E of ESBWR Reactor Building Structural Design Report, Reference 2.1.2-e, including the thermal loads for the surrounding area of the RB upper pool.

Four cases of temperature distributions in the upper pool at 72 hours after a LOCA are shown in Figure 5.2.2-3.

(2) Spent Fuel Pool

Table 5.2.2-2 shows the envelopes of transient temperatures in the spent fuel pool during a DBA.

1. Normal operation
2. DBA – 72 hours after DBA due to loss of Fuel and Auxiliary Pools Cooling System (FAPCS) cooling function

Because the temperature in the spent fuel pool reaches its maximum values at this time, the above events are selected as the design loads.

Determining the accident thermal loads follows the same procedure as that described for normal thermal loads in Subsection 5.2.2.1. The only difference is that non-steady state heat transfer analyses are performed for accident temperature conditions instead of steady state analyses.

5.2.3 Hydrodynamic Loads

5.2.3.1 Safety/Relief Valve (SRV) Loads

The SRV loads are hydrodynamic loads resulting from the discharge of the safety/relief valves. Figure 5.2.3-1 shows the load values and the regions in the RCCV where the SRV loads are applied.

The SRV design loads are determined, taking their dynamic characteristics into account, by multiplying the load values by Dynamic Load Factors (DLFs), which are shown in Figure 5.2.3-1. The adequacy of DLF equal to 2.0 is confirmed by a dynamic response analysis.

5.2.3.2 Chugging (CH) Loads

The chugging loads are hydrodynamic loads that are applied to the suppression chamber during a LOCA. Figure 5.2.3-2 shows the event-time relationship during a DBA.

Figure 5.2.3-3 shows the regions where the chugging loads are applied, the load values, and the DLFs. The adequacy of DLF equal to 2.0 is confirmed by a dynamic response analysis.

5.2.3.3 Condensation Oscillation (CO) Loads

The CO loads are, like the chugging loads, hydrodynamic loads that are applied to the suppression chamber during a LOCA. Figure 5.2.3-4 shows the regions where the CO loads are applied, the load values, and the DLFs.



5.2.3.4 Pool Swell

The pool swell loads are, like the CH and CO loads, hydrodynamic loads that are applied to the suppression chamber during a DBA. The peak Pool Swell (PS) dynamic pressure in the air space of the suppression pool is 350kPa (i.e., 246 kPag (36 psig)). The dynamic load factor is 1.0. These PS boundary pressures shall be applied together with a drywell pressure of 414 kPa (i.e., 310 kPag (45 psig)) such that the pressure differential between the Drywell (DW) and the Wetwell (WW) is 64 kPad (9 psid) as WW gas space is at its peak pressure during PS. The pressure distribution is shown in Figure 5.2.3-5.

Note: The unit kPa without (d) or (g) means absolute.

Containment structures shall be analyzed for the following cases involving PS pressure, froth impact and fallback drag loads.

Case 1. PS occurs with pressures without froth impact and fallback drag loads.

Containment structures are to be analyzed for PS pressure with pressure distribution shown in Figure 5.2.3-5.

Case 2. PS occurs with pressures in conjunction with froth impact and fallback drag loads.

Containment structures are to be analyzed for two cases involving PS pressure, froth impact and fallback drag loads.

Case 2a. WW and bubble pressures defined in Figure 5.2.3-6 together with the froth impact pressure ($DLF = 1.60$) acting on the bottom face of diaphragm floor and bottom face of the bottom flange of radial beams.

Case 2b. WW and bubble pressures defined in Figure 5.2.3-6 together with the fallback drag pressure ($DLF = 1.0$) acting on the top face of the bottom flange of the radial beams of the diaphragm floor.

The worst results or the enveloping values of these cases will be used as the PS values to be combined with other loads in the load combinations.

5.2.4 RPV Reactions due to Hydrodynamic Loads

Reactions of the RPV, which are applied to the RPV support bracket and the RPV stabilizer, and the GDSC pools during the SRV discharge and LOCA, are regarded as hydrodynamic loads in the RCCV design. The RPV reactions due to SRV loads and LOCA loads are shown on Table 5.2.4-1.

5.3 Environmental Loads

5.3.1 Wind Loads

Design conditions for calculating the basic wind load are as follows:

Basic wind speed (50 year recurrence interval), m/s (mph)	62.6 (140)
Importance Factors (Safety-related structures)	1.15



Exposure Category

Exposure D

Wind load values at each floor level are shown in Table 5.3.1-1. They are evaluated in accordance with ASCE 7-02, Reference 2.2-d, using the design conditions mentioned above. The evaluation of design wind loads is described in Appendix B in Reference 2.1.2-e.

5.3.2 Tornado Loads

Design conditions for calculating the tornado wind load are as follows:

Maximum Tornado wind speed, m/s (mph)	147.5 (330)
Maximum Rotational Speed, m/s (mph)	116.2 (260)
Maximum Translational Speed, m/s (mph)	31.3 (70)
Radius, m (ft)	45.7 (150)
Maximum Pressure Drop, kPa (psi)	16.6 (2.4)
Maximum Rate of Pressure Drop, kPa/s (psi/s)	11.7 (1.7)

Tornado load values at each floor level are shown in Table 5.3.2-1. They are evaluated in accordance with BC-TOP-3A, Reference 2.4-c, using the design conditions mentioned above. The evaluation of design tornado loads is described in Appendix B in Reference 2.1.2-e.

5.3.3 Seismic Loads

The seismic loads considered in the RB design are those generated by the site-specific SSE. They are applicable to all seismic load combinations including those for LOCA flooding inside the containment.

The design seismic loads are determined from the site-specific Soil-Structure Interaction (SSI) analysis results, which are described in Reference 2.1.2-g "North Anna 3 Reactor/Fuel Building Complex Seismic Analysis Report." Four components - two horizontal, one vertical, and one torsional - of the seismic loads are evaluated following the methodology used for the standard design of the RB in Reference 2.1.2-e. Overturning moment loads applied at each floor elevation are also considered to account for the effects of floor rocking on the wall axial forces. The out-of-plane loads due to horizontal SSE acceleration are considered as one of the horizontal components at walls, whose out-of-plane natural frequency is less than 50 Hz.

The analysis cases of the RB/FB seismic analyses used to form the bounding NA3 site-specific seismic demands for this report are presented in Table 3-1 of Reference 2.1.2-k. These loads bound the effects of stiffness variation as described in Reference 2.1.2-g.



The effect of LOCA flooding is insignificant in view of Table 5.3.3-1 for comparison of structural loads at key locations of various structures in the RB/FB for standard plant at hard rock site. As shown, the loads for flooded containment are within 7% to -9% of the loads for non-flooded containment during plant normal operation. Since NA3 site is very similar to the hard rock generic site for which containment flooding during LOCA has insignificant effect on seismic responses, the bounding seismic loads included in Reference 2.1.2-k are equally applicable to load combinations with LOCA and other applicable loads for either flooded or non-flooded conditions of the containment.

The site-specific seismic design loads applied to the RB, FB, and RCCV structures are shown in the following tables. Node numbers in the tables are described in Figure 5.3.3-1.

- Horizontal seismic loads, moments, and torsion: Tables 5.3.3-2 through 5.3.3-6
- Vertical seismic loads: Tables 5.3.3-7 through 5.3.3-11
- Out-of-plane accelerations at walls: Table 5.3.3-20

The equivalent out-of-plane acceleration loads on slabs and walls are based on Tables 4.5-1 and 4.5-2 of Reference 2.1.2-k. The details of calculation of the equivalent out-of-plane acceleration loads on slabs and walls are shown in Appendix D of Reference 2.1.2-g.

The following loads are also regarded as seismic loads, and are considered in the RB design.

Soil Pressure due to an Earthquake

The design soil pressure loads due to SSE are calculated from SSI analysis results. Design loads are shown in Table 5.3.3-12. These loads are determined by enveloping the soil pressure calculated directly from SSI analysis.

Since the NA3 site-specific passive pressures required for stability evaluations in Reference 2.1.2-h are bounded by the standard design wall capacity pressures, the wall capacity evaluation is not performed.

Seismic Hydrodynamic Loads in Pools

Seismic hydrodynamic loads in pools due to SSE are considered. Tables 5.3.3-13 through 5.3.3-18 show the loads applied to walls and slabs, and the locations of pools are shown in Figure 5.3.3-2. The detail of the calculation of these seismic hydrodynamic loads is shown in Appendix A of Reference 2.1.2-k. The convective (sloshing) pressures considered in the standard plant design are conservatively used for NA3. As additional conservatism, the pressure component associated with impulsive (rigid) mode is based on NA3 seismic demand or standard plant demand, whichever is larger.

RPV Reactions due to an Earthquake

RPV reactions due to an earthquake are regarded as a part of the seismic loads in the RB and RCCV design. The values are summarized in Table 5.3.3-19. The reactions are applied to the RPV support brackets.



6. STRUCTURAL ANALYSIS AND DESIGN

6.1 General Description

The structural analysis and design of the RB are performed according to the following procedure.

1. Prepare a FE model for stress analyses considering structural characteristics and materials.
As stated in Section 3.1, the RB including RCCV and the FB are integrated into one building in the ESBWR plant. Therefore, the FE model includes the RCCV, RB, and FB (RB/FB global FE model).
2. Perform stress analyses for the design loads described in Chapter 5, and calculate the section forces.
3. Select the basic and critical load combinations as the selected design load combinations for the RB design.
4. Combine the section forces according to the selected design load combinations mentioned in Step 3 above, which are described later in Section 6.3.
5. Perform structural design calculations using the section forces for the selected design load combinations.

The design/evaluation is essentially performed using ASME, Section III, Division 2. The details of the design/evaluations and the exceptions to the use of ASME, Section III, Division 2 are described in Section 6.4.1.

The design of steel structures in the RB is performed in accordance with ANSI/AISC N690-1994 "Specification for the Design, Fabrication, and Erection of Steel Safety-Related Structures for Nuclear Facilities," with the Supplements No.1 (2002) and No.2 (2004).

6.2 Stress Analysis

6.2.1 Analysis Program

The computer program used for the stress analysis calculations is NASTRAN Version 2013.0.0. It is a general purpose stress analysis program, which is technically based on the FE method. Analysis calculations are executed on Red Hat Enterprise Linux Server release 5.7 OS.

6.2.2 Analysis Model

6.2.2.1 Outline of the Analysis Model

Major structural members of the RB and the FB, which are shown in Figures 3.1-1 through 3.1-7, include the basemat, RCCV, floor slabs, external walls, shear walls, and frame members. FE models are employed considering the complexity of the structure, load conditions, and boundary conditions.



Figures 6.2.2-1 and 6.2.2-2 show the RB/FB global FE analysis model used for the RB design. The model includes the whole (360°) portion of the RB including the RCCV and FB taking the application of nonaxisymmetrical loads and the asymmetric layout of the FB structure into consideration.

Structures of the FB located above EL 22,500 are not included in the model, because they are Seismic Category II structures. (Refer to Figure 3.1-6.)

Besides building structures, the global FE model includes the major RCCV internal structures, i.e., the vent wall, the diaphragm floor slab, the GDCS pool, the reactor shield wall, and the RPV support brackets. In addition, steel liner plates installed at the inside surface of the RCCV are included in the model. They are shown in Figures 6.2.2-3 and 6.2.2-4.

As described in Appendix E to Reference 2.1.2-e, the original global FE model was updated for the standard design to reflect current pool gate design and design changes in the upper pools as required to meet design acceptance criteria for stresses that result from temperature variations in the RB upper pool after a DBA. This updated standard plant model is applied for the following unit load analysis cases for NA3:

- Dead Load
- Pressure Load at Drywell, IC/PCCS Pools, HELB in MS Tunnel and WW
- Temperature Loads in RB upper pools after a LOCA shown in Figure 5.2.2-3.
- Seismic load for NA3 site-specific conditions

For other unit load cases, the original global FE model is used because these loads are not influenced by the design changes in the upper pools.

6.2.2.2 Modeling Principles

The global FE model is developed according to the following modeling principles:

1. The FE stress analysis model is a whole structure of the RB including the RCCV and the FB.
2. The following major penetrations in the RCCV are included in the model in order to take local reduction of the wall stiffness into consideration:
 - upper drywell equipment and personnel hatches
 - lower drywell equipment and personnel hatches
 - suppression chamber access hatch
 - main steam and feedwater pipe penetrations.
3. The analysis model is developed based on the GA drawings listed in Table 6.2.2-1.
4. Primary structural members, including the RCCV, basemat, pool structures, shear walls, and floor slabs are modeled so that their design section forces are adequately



evaluated. Table 6.2.2-2 lists which structural members are included in the FE model and which ones are designed using the section forces obtained by the global model analyses. Table 6.2.2-3 shows the types of finite elements used to model various structural members. It also shows the section forces each type of element can account for.

5. The global coordinate system of the analysis model is determined as follows:
 - Origin: The origin is on EL 0,000 at the center of the RCCV.
 - X-axis: Positive X is in the southward direction from the origin.
 - Y-axis: Positive Y is in the eastward direction from the origin.
 - Z-axis: Positive Z is in the vertically upward direction.
6. Table 6.2.2-4 shows the z-direction in local coordinate systems of major structures. This information is used to define the directions of applied loads, such as pressure and thermal loads.

6.2.2.3 Modeling of the Basemat and Ground

Basemat

As shown in Tables 3.1-1 and 3.1-2, the thickness of the basemat is 4.0 m in general, and is increased to 5.1 m at the RCCV portion and 5.5 m at the Spent Fuel Pool portion.

The elements are placed horizontally at the center of the basemat. The R7 column line marks the division between the RB and FB. In addition, the basemat inside the RPV pedestal is treated as a part of the RCCV.

Figure 6.2.2-5 shows the FE model of the basemat. Figure 6.2.2-6 is an enlarged figure of the basemat inside the containment. They show FE meshes, grid IDs, element IDs, and element property IDs (PIDs).

Ground

The ground is modeled with spring elements. Three independent spring elements, one vertical and two horizontal, are attached to each of the basemat grid points.

Spring constants are calculated using the soil properties shown in Section 3.4. Table 6.2.2-5 shows the vertical and horizontal spring constants per a unit area. The constants are calculated based on soil spring constants of the Sway-Rocking model for standard plant SSI analyses. These soil springs are for soft site conditions considered for the standard plant design and they are conservative for NA3 rock site because softer soils lead to larger structural deformations.

The ground is assumed to be elastic, and the basemat uplift during an earthquake is not considered in the stress analysis calculations. Uplift evaluation described in Section 5.6 of Reference 2.1.2-g demonstrates that the possible uplift of the RB/FB basemat has negligible effect on the RB/FB seismic responses that are performed on linear elastic models.



6.2.2.4 Modeling of the RCCV

RCCV Cylinder Wall

The RCCV cylinder wall is modeled with shell elements that are 2.0 m thick. The elements are placed vertically at the center of the wall, $R = 19.0$ m. The wall is divided, in general, into 48 elements in the circumferential direction (7.5° pitch) and into three or five elements vertically per a story. The modeled region of the RCCV wall is between the center of the suppression pool slab, EL 3,650, and the center of the Top Slab, EL 25,800. The cylindrical wall below RCCV cylinder wall, from EL -11,500 to EL 3,650 is shear wall that connects the RCCV cylinder wall and basemat.

The levels of floor slabs connected to the RCCV wall are determined as shown in Table 6.2.2-6. They are so determined that the slabs connected to the RCCV are located at their centers of thicknesses.

The major penetrations in the concrete containment are included in the model in order to take local reduction of the wall stiffness into consideration. Their dimensions and locations are shown in Table 6.2.2-7.

Figure 6.2.2-7 shows the FE model of the RCCV cylinder wall including the wall below the RCCV.

RPV Pedestal Wall

The RPV pedestal wall is modeled with shell elements that are 2.4 m thick, whereas its actual thickness is 2.5 m as shown in Table 3.1-2. The thickness is conservatively reduced considering that the concrete section is decreased by thick steel plates at the connection with the RPV support brackets.

The elements are placed vertically at the center of the cylinder wall, $R = 6.8$ m. The wall is divided, in general, into 48 elements in the circumferential direction (7.5° pitch) and into three elements vertically per a story. The modeled region of the RPV Pedestal wall is between the upper surface of the basemat, EL -11,500, and the center of the suppression pool slab, EL 3,650.

The openings included in the RPV pedestal model are shown in Table 6.2.2-7.

Figure 6.2.2-8 shows the FE model of the RPV pedestal wall.

Top Slab

The Top Slab is modeled with shell elements that are 2.4 m thick. The elements are placed horizontally at the center of the Top Slab, EL 25,800. Elements are, in principle, divided in X- and Y-directions considering the direction of rebar arrangements.

Figure 6.2.2-9 shows the FE model of the Top Slab.

Suppression Pool Floor Slab

The suppression pool floor slab is modeled with shell elements that are 2.0 m thick. The elements are placed horizontally at the center of the suppression pool floor slab, EL 3,650. Elements are divided in radial and circumferential directions considering the direction of



rebar arrangements.

Figure 6.2.2-10 shows the FE model of the suppression pool floor slab.

6.2.2.5 Modeling of the RCCV Liner and Sleeves

RCCV Liner

The steel liner plates that are attached to the basemat and the RCCV are modeled with shell elements. The liner elements are divided in the same way as the corresponding concrete elements.

The materials and thicknesses of the RCCV liners are summarized in Table 6.2.2-8. Figures 6.2.2-11 through 6.2.2-15 show the FE models of the liners. It should be noted that the liner plates at the following locations are the parts of the RCCV internal model described later in Subsection 6.2.2.10. Therefore, they are not shown in Figures 6.2.2-11 through 6.2.2-15.

- RCCV wall – diaphragm floor slab joint
- RPV pedestal – vent wall joint

Rigid bar elements connect the corresponding grid points of the liner elements and concrete elements as shown in Figure 6.2.2-16. Rigid bar elements are placed in the radial direction for the liners of the RCCV cylinder wall and the RPV pedestal. They are placed vertically for the basemat, the suppression pool slab, and the Top Slab.

Sleeves

Sleeves attached to the RCCV top head openings are modeled with rod elements. Table 6.2.2-9 shows the areas of modeled rod elements. FE models of the sleeves are shown in Figure 6.2.2-17.

6.2.2.6 Modeling of the RB Pools and MS Tunnel Structures

The pool structures in the RB include walls and slabs of the reactor cavity pool, the dryer/separator pool, the fuel buffer pool, the IC/PCCS pool, the IC/PCCS expansion pool, and the GDCS pool. The modeled pool walls, except the external walls, are shown in Figure 6.2.2-18.

The walls and slabs of the Main Steam (MS) tunnel room are included in the analysis model in order to estimate the section forces due to the HELB load in the MS tunnel room.

The pool girders, reactor well walls, pool walls, pool slabs, and the MS tunnel walls and slabs are modeled with shell elements.

FE models of the pool girders are shown in Figure 6.2.2-19.

6.2.2.7 Modeling of Shear Walls

The following walls are included in the global analysis model:

- External walls including the wall on R7/F1 column line



- Walls above EL 34,000 and on the R2 and R6 column lines
- Wall below the RCCV cylinder wall
- Inner walls indicated in Figures 6.2.2-20 through 6.2.2-22

The external walls are modeled with shell elements that are placed vertically on the center of each wall at the lowest story. The regions of the external walls which are modeled are between the top of the basemat, EL -11,500, and the top of each wall. They are divided horizontally at the same locations as those of the basemat grid points, and vertically into, in principle, three or five elements in each story. FE models of the external walls are shown in Figures 6.2.2-23 through 6.2.2-27. The considered openings are shown in Table 6.2.2-10.

The wall below the RCCV cylinder wall is shown in Figure 6.2.2-7.

The inner walls are modeled at appropriate locations. They are modeled with shell elements in the same way as the external walls.

Rigid bar elements connect the basemat and the bottom of the shear walls as described in the modeling of the RCCV liner.

6.2.2.8 Modeling of Floor Slabs

The floor slabs are modeled with shell elements which are divided in the same way as the basemat. Major large openings are included in the model.

The elements of slabs that are connected to the RCCV are placed horizontally at the levels described in the modeling of the RCCV wall. Elements of the slabs that are located above the Top Slab level are positioned at corresponding floor levels.

FE models of the major floor slabs are shown in Figures 6.2.2-28 through 6.2.2-30.

6.2.2.9 Modeling of Frame Members

Frame members included in the global stress analysis model are columns, girders, and the main trusses of the roof truss. They are modeled with bar elements.

Roof trusses and roof slabs are connected rigidly. Steel girders attached to the reinforced concrete columns, like steel girders at the FB roof, are simply supported at the ends of the girders.

Figures 6.2.2-31 through 6.2.2-36 show FE models of frame members.

6.2.2.10 Modeling of the Containment Internal Structures

The RCCV internal model is described in detail in another report, T12-5010 "Structural Design Report for Containment Internal Structures", Reference 2.1.2-1. Therefore, its outline is briefly explained here.

The vent wall and the diaphragm floor are concrete-filled structures consisting of steel plates and concrete. The infill concrete is conservatively neglected in the analysis model. Steel plates, including connecting rib plates and girders, are modeled by shell elements.



The GDCS pool, the reactor shield wall, and the RPV support brackets are also included in the analysis model. These structures are modeled by shell elements, except the GDCS pool beams, which are modeled by beam elements. The analysis model of these structures is shown in Figure 6.2.2-4.

6.2.2.11 Units and Material Constants

Stress analyses are executed with the following SI units:

- length: m
- force: MN
- moment: MN-m
- pressure: MPa
- temperature: °C

The material constants shown in Table 6.2.2-11 are used for the stress analysis calculations.

The Young's modulus for concrete used in the thermal load analysis is reduced depending on the average temperature of each element, as described in Note 2 of Table 6.2.2-11. Young's modulus for the RCCV steel liners is set to a small value, 1/10000 of the normal value, in analysis calculations of non-thermal loads so that they do not bear any stresses.

6.2.2.12 Boundary Conditions

Because the RB/FB global FE model is a whole (360°) model, only soil springs under the basemat are used as a boundary condition.

6.2.3 Method of Applying Loads

Load application methods in the global FE analyses are described in the following subsections. However, as for the loads applied to the RCCV internal structures, their application methods are described in another report, Reference 2.1.2-1. Therefore, they are not referred to in this report, in principle.

6.2.3.1 Dead Load

Weight of Modeled Structural Members

The weights of reinforced concrete members included in the analysis model are evaluated using the GRAV feature that NASTRAN provides. It applies a downward gravity force to each element mass which is calculated from the weight density and the volume of the element.

Evaluation of the structural weights using the GRAV has one drawback, which is double counting of weights at such regions as wall-wall and wall-slab corners and edges of girders and columns. These double counts are ignored in the analysis, however, for the following reasons. Duplicated weights of corners are negligibly small compared to the total weight of the analysis model. The increased weights of girders lead to a design with larger margins.



Roof trusses and steel girders are included in the analysis model but their weights are evaluated differently. Their evaluation and the methods of applying them are explained below together with those of structural members which are not modeled.

Weights of Not-Modeled Structural Members

The weights of roof trusses, steel beams, permanent steel girders, which are included in the model, decks, and deck beams, are applied to slab elements as distributed surface loads.

The weights of finishings for slabs and external walls and the weights of liners not included in the FE model are also applied as distributed loads.

The weights of FB structures above EL 22,500, which are not included in the FE model, are applied to the nodes at the positions of columns supporting the roof slab.

Unit area loads applied to the analysis model are described in Table 5.1.1-1.

Miscellaneous Structures, Piping, and Commodities

The weights of the miscellaneous structures, piping, and commodities on the floor slabs and the containment are applied as distributed surface loads to the floor slab elements and containment wall, respectively.

Values of loads mentioned above are indicated in Tables 5.1.1-2 through 5.1.1-4.

Equipment Weights

The distributed surface loads of equipment weights are calculated from weights and areas of equipment shown in Tables 5.1.1-5 and 5.1.1-6 and Figures 5.1.1-1 through 5.1.1-9, and are applied to the floor slab elements and nodes.

The calculated equipment load values and their regions are shown in Figures 6.2.3.1-1 through 6.2.3.1-10.

The weights of crane, RB crane, refueling machine, FB crane, and fuel handling machine are transmitted via crane girders to four supporting columns around the crane as vertical force and bending moment. They are applied as nodal forces to the edge of rigid link elements that are modeled to evaluate the effect of the distance from column to the crane wheels on the girder. The crane is assumed to be positioned center of crane girders. The lifted loads are evaluated in the same manner of the crane weights, but they are applied to two columns of one side, conservatively.

Hydrostatic Loads

Hydrostatic loads due to the pool water act on the pool walls and slabs. Figures 6.2.3.1-11 through 6.2.3.1-35 show the regions where the hydrostatic pressure loads are applied, together with their values. For each element in the regions, the pressure at the center of gravity of the element is applied as a uniform pressure load.

As for the hydrostatic loads on the RCCV top head, equivalent nodal forces are applied to the grid points around the top head opening as shown in Figure 6.2.3.1-14.



6.2.3.2 Live Load

Floor Live Loads

Floor live loads, except for roofs, are applied to modeled slab elements as uniformly distributed surface loads. Applied load values are described in Table 6.2.3.2-1. Floor live loads for roofs envelope the snow load as shown in Table 6.2.3.2-1 and Figure 6.2.3.2-1.

For the FB, floor live loads should be applied to the roof slab at EL 27,500. However, the FB structures above EL 22,500 are not included in the global FE model because they are Seismic Category II structures. Therefore, snow loads are applied as nodal forces to the slab at EL 22,500 as shown in Figure 6.2.3.2-2. Loads are applied to the nodes at the positions of columns supporting the roof slab.

Lateral Soil Pressure Load at Rest

The lateral soil pressure at rest is applied to the external walls below grade. The static lateral soil pressure loads are for generic sites considered in the standard design and they are larger than the NA3 site-specific static lateral pressures and conservatively used for NA3. Figures 6.2.3.2-3 through 6.2.3.2-7 show the values and regions where the soil pressure loads are applied.

For each element in the regions, a pressure at the center of gravity of the element is applied as a uniformly distributed pressure load. Soil pressure loads that act on the side of the basemat are applied as equivalent horizontal forces to nodes on the basemat edges as shown in Figure 6.2.3.2-3. Bending moments generated by differences of pressures at the top and bottom of the basemat are also applied to basemat nodes as shown in Figure 6.2.3.2-3.

Snow Loads

The snow loads are applied to the roof slab. However, since the snow load on the RB roof at EL 52,700 is less than floor live load, it is neglected.

For the RB roof at EL 34,000 and the FB roof, snow loads rather than floor live loads should be applied to the roof slab at each level as shown in Figure 6.2.3.2-1.

6.2.3.3 Pressure Load

Containment Pressure Loads

Analysis calculations are performed for two unit pressures, each 1.0 MPa, that are applied to the Drywell and WW, respectively. The corresponding regions are shown in Figures 6.2.3.3-1 and 6.2.3.3-2. Table 6.2.3.3-1 indicates the load combinations to achieve the design pressure loads based on unit pressures. The table contains the combinations for IC/PCCS pool pressure load and HELB loads in the MS tunnel, too.

Figures 6.2.3.3-3 through 6.2.3.3-6 show the regions for the Drywell unit pressure load, and Figures 6.2.3.3-7 and 6.2.3.3-8 show those for the WW unit pressure load.

IC/PCCS Pool Pressure Load

Analysis calculations are performed for a unit pressure, 1.0 MPa, applied to the IC/PCCS



pool and IC/PCCS expansion pools. The corresponding regions are shown in Figure 5.2.1-2.

Figures 6.2.3.3-9 through 6.2.3.3-20 show the regions where the IC/PCCS pool unit pressure loads are applied.

High Energy Line Break Loads

Analysis calculations are performed for a unit pressure, 1.0 MPa, applied to the MS tunnel and the general rooms. The HELB loads for the general rooms of the RB and the FB are considered at the walls and roofs, which comprise of the superstructure above EL 34,000 and EL 4,650 respectively, as a significant impact portion.

Figures 6.2.3.3-21 through 6.2.3.3-24 show the regions for the HELB loads for the MS tunnel. Figures 6.2.3.3-25 through 6.2.3.3-33 show the regions for the HELB loads for the general rooms.

6.2.3.4 Thermal Load

Thermal loads are determined as follows based on heat transfer analysis results, which are described in Reference 2.1.1-f, U71-5060 "RB/FB Heat Transfer Analysis Report."

Concrete Walls and Slabs

The average temperature, T_d , and the surface temperature difference, T_g , that are obtained by heat transfer analyses are applied to shell elements.

For the thermal loads during a LOCA and LOCA flooding, the following three conditions are considered depending on the GDCS pools water depth. Condition 2 and 3 are performed assuming a conservative case that there is no water in the GDCS pool.

- Condition 1; GDCS pool water depth is 4410 mm
- Condition 2; GDCS pool water depth is 792 mm
- Condition 3; GDCS pool water depth is 792 mm (during LOCA flooding)

Tables 6.2.3.4-1 and 6.2.3.4-2 show atmosphere temperature. Table 6.2.3.4-3 and Figures 6.2.3.4-1 through 6.2.3.4-30 show the regions where the various thermal loads are applied to the shell elements. Tables 6.2.3.4-4 through 6.2.3.4-13 and Tables 6.2.3.4-17 and 6.2.3.4-18 summarize the thermal load values for each operational state and each region.

The thermal load values obtained from heat transfer calculation for updated upper pool temperature distribution using the conditions described in Appendix E of Reference 2.1.2-e are shown in Tables 6.2.3.4-19 through 6.2.3.4-22. These four analysis cases are summarized below:

Case 1: Maximum, temperatures in all pools are at their respective maximum values

Case 2: Minimum, temperatures in all pools are at their respective minimum values.

Case 3: Mixed, temperatures in individual pools are at either maximum or minimum values.



Case 4: Lower bound, temperatures in all pools are at 0°C

Tg of a shell element is positive if the surface in the positive z-direction in the local coordinate system has the higher temperature.

Beams, Girders and Columns

The frame members are modeled by bar elements.

Beams, girders and columns located inside buildings are exposed to the uniform and steady temperature of the RB/FB rooms. Therefore, the thermal loads for the elements of these members are so determined that the average temperature Td is equal to the room temperature (summer 40 °C, winter 10 °C) and the surface temperature difference Tg is 0.0.

On the other hand, as for the reinforced concrete columns located in external walls, their thermal loads are set to be the same as those of walls with the modifications described in Table 6.2.3.4-14.

Table 6.2.3.4-14 shows the thermal loads and indexes applied to concrete girders and columns. Figures 6.2.3.4-31 through 6.2.3.4-36 show the positions and thermal load indexes of concrete girder and columns. The thermal loads for rigid link elements of steel beams and columns are set to be the same as the room temperatures.

RCCV Liner, Sleeves

The RCCV atmosphere temperature is used as average temperature, Td. In each case, the surface temperature difference, Tg, is set to be 0.0 °C. Temperature loads applied to the RCCV liners are included in Tables 6.2.3.4-4 through 6.2.3.4-13.

Table 6.2.3.4-15 shows the thermal loads applied to the sleeve at the RCCV top head opening modeled by rod elements.

Table 6.2.3.4-16 shows the load labels of the design thermal loads.

6.2.3.5 Hydrodynamic Loads

Analysis calculations are performed using the loads and the Dynamic Load Factors (DLFs) given in Figures 5.2.3-1 and 5.2.3-3 through 5.2.3-6.

Figures 6.2.3.5-1 through 6.2.3.5-20 show the values and regions to which the hydrodynamic loads are applied. Hydrodynamic loads acting on the inner surface of the RCCV are applied to the liner elements as uniformly distributed pressure loads. The pressure value applied to each element is calculated at the center of gravity of the element.

6.2.3.6 Reaction Loads due to Hydrodynamic Loads

The RPV and GDSC pool wall reactions during a LOCA are applied only to the RCCV internal structures. For details of the load application methods, refer to Reference 2.1.2-1.

6.2.3.7 Wind Loads

Loads for four wind directions, East, West, South and North wind, are considered. Tables 6.2.3.7-1 through 6.2.3.7-4 show the applied pressures.



Wind pressure loads acting on walls and slabs are applied to shell elements as uniform pressure loads. The pressure value applied to each element is calculated at the center of gravity of the element.

6.2.3.8 Tornado Loads

Analyses for the tornado wind load is performed using the same method as the design wind load.

Loads for four wind directions, East, West, South and North wind, and differential pressure loads are considered. Tables 6.2.3.8-1 through 6.2.3.8-5 show the applied pressures.

6.2.3.9 Seismic Loads

As for seismic loads, analyses are performed for the loads listed in Table 6.2.3.9-1. The seismic loads for normal operation & a LOCA condition are the same seismic loads for a LOCA flooding condition.

6.2.3.9.1 Seismic Loads for the RB, RCCV, and FB

The seismic forces applied to the analysis model are determined from the design seismic loads shown in Tables 5.3.3-1 through 5.3.3-10 and 5.3.3-19. Four components, two horizontal including out-of-plane loads to walls, one vertical, and one torsional of the seismic loads are evaluated. The directions in which they are applied are shown schematically in Figure 6.2.3.9-1.

The methods of applying the forces are described below for each of the components.

Shear Forces

Calculation methods for the shear forces applied to each story are given in Figure 6.2.3.9-2. The shear forces are applied to the RCCV, RPV pedestal, external wall, and inner seismic wall. Inner walls where seismic loads are applied are shown in Figures 6.2.3.9-3 through 6.2.3.9-5 at each story.

Shear forces are distributed to walls in a story according to the method shown in Figure 6.2.3.9-6. Tables 6.2.3.9-2 and 6.2.3.9-3 summarize the shear areas of seismic walls. Tables 6.2.3.9-4 and 6.2.3.9-5 show the shear forces applied to each wall, which are calculated according to the method shown in Figure 6.2.3.9-6.

Shear forces are applied as horizontal nodal forces to grid points as illustrated in Figure 6.2.3.9-6. Their locations are described below:

- RCCV and seismic walls: Nodal forces are applied to grid points on floor slab levels.
- RCCV internal structures: refer to Reference 2.1.2-1.

In addition to shear forces applied to seismic walls, shear forces generated in the basemat in the SSI analyses are applied to the basemat nodes as nodal horizontal forces. The forces are distributed to all basemat nodes in proportion to the tributary weights of nodes. Applied shear forces are included in Tables 6.2.3.9-4 and 6.2.3.9-5.



Overturning Moments

The overturning moment applied to each story is determined in such a way that the sum of the applied moment and the one due to shear forces applied to the stories above is equal to or larger than the design moment of the story. The moment is adjusted considering the difference between the height where the design seismic loads are defined and the height where the seismic forces are applied. The calculation method is explained in Figure 6.2.3.9-2. Tables 6.2.3.9-6 through 6.2.3.9-11 summarize the overturning moments applied to the RB seismic walls, RCCV, and RPV pedestal, respectively. Columns "m+dMq" in these tables show the values of the applied moments.

Overturning moments are applied as vertical nodal forces to grid points as illustrated in Figure 6.2.3.9-7. The locations of the nodal forces are described below and shown in Figures 6.2.3.9-8 through 6.2.3.9-17.

- RB and FB: Nodal forces are applied to grid points that are on the external walls at floor slab levels.
- RCCV: Nodal forces are applied to grid points at the floor slab levels. At the top of the RCCV, EL 27,000, the design moment needs to be applied along the perimeter of the RCCV. In order to achieve this, a negative moment, which cancels the reactions on the Top Slab, is applied at the bottom of the pool girder. Then a moment with the same magnitude is applied to grid points on the top of the RCCV. This procedure is illustrated in Figure 6.2.3.9-18.
- Pool girder: Nodal forces are applied to the grid points that are on EL 34,000 and above the RCCV.

In addition to the design overturning moments mentioned above, an additional moment is applied to the basemat in order to adjust the total overturning moment imposed on the soil by the total shear force. The basemat is modeled at the center of its thickness, and the soil spring elements are directly attached to the basemat grid points. However, because the actual ground is underneath the basemat, an overturning moment, ΔM , which is calculated by the following equation, needs to be added. Tables 6.2.3.9-6 and 6.2.3.9-7 include the calculated additional overturning moments to be applied to the basemat.

$$\Delta M = Q \times t/2$$

where,

Q : total shear force at the bottom of the basemat

t : thickness of the basemat (= 4.0 m)

The additional overturning moment is applied as vertical nodal forces to the basemat grid points. The magnitude of the vertical force per unit area is assumed to be proportional to the distance from the center of the basemat. The nodal force applied to each node is then calculated by multiplying it by the tributary area of the node.



Vertical Seismic Force

The vertical accelerations are determined from the design vertical accelerations shown in Tables 5.3.3-6 through 5.3.3-10.

The maximum vertical accelerations obtained from dynamic analyses are applied to the RB/FB walls, RCCV, RPV Pedestal and basemat. On the other hand, design vertical accelerations applied to slabs are determined using the following procedure:

- Slabs on each floor level are modeled with several masses in the dynamic analysis model as shown in Figure 5.3.3-1. The equivalent vertical slab acceleration is calculated using the following equation for each floor.

$${}_s A_{eq} = \frac{\sum {}_s A_i \cdot {}_s W_i}{\sum {}_s W_i}$$

where,

${}_s A_{eq}$: Equivalent slab acceleration

${}_s A_i$: Maximum acceleration of the i-th mass in the dynamic analysis results

${}_s W_i$: Weight of the i-th mass in the dynamic analysis model

- The total weights of the slabs are not included in the slab masses in the dynamic analysis model. Some of the weight is included in the RB/FB mass or RCCV mass. Therefore, the average slab accelerations are calculated using the following equation:

$${}_s A_{ave} = \frac{({}_s A_{eq} \cdot {}_s W_s + {}_{RB} A \cdot {}_{RB} W_s + {}_{CV} A \cdot {}_{CV} W_s)}{({}_s W_s + {}_{RB} W_s + {}_{CV} W_s)}$$

where,

${}_{RB} A, {}_{CV} A$: Maximum accelerations of the RB/FB and RCCV masses, respectively

${}_s W_s$: Summation of slab mass weights ($= \sum {}_s W_i$)

${}_{RB} W_s, {}_{CV} W_s$: Slab weights included in the RB/FB and RCCV masses, respectively

- The average accelerations, ${}_s A_{ave}$, shown in Table 6.2.3.9-12 is regarded as the design loads for the slabs. The accelerations are uniformly applied to all slab grid points.

Table 6.2.3.9-12 summarizes the design vertical accelerations.

For the RB/FB walls, RCCV, and RPV Pedestal, a design acceleration obtained at a given elevation is applied to a region that is limited by the centerlines of that elevation and the upper and lower elevations.

The vertical seismic forces are applied to all grid points as upward vertical nodal forces. Each nodal force is calculated by multiplying the tributary weight of the node by the vertical



acceleration determined for the region containing the node. The tributary weight of the node is obtained using the load combination for the vertical seismic loads, which consists of the dead load and a quarter of the floor live load (Refer to Subsection 5.1.2).

Torsional Moments

The calculation method of input torsional moments is given in Figure 6.2.3.9-19. The total torsional moment is calculated by summing up those for the RBFB wall, the RCCV wall and the RPV pedestal. The torsional moment applied to each story is calculated by subtracting the total torsional moment for the story above from the total torsional moment for that story. The torsional moment applied to each story is determined in such a way that the sum of the applied moment and the one due to shear forces applied to the stories above is equal to or larger than the total torsional moment of the story.

The calculated torsional moments are applied to the seismic walls as in-plane shear forces. The calculation method of the shear forces due to torsional moment is described in Figure 6.2.3.9-20 and the results are summarized in Table 6.2.3.9-13. Torsional moments in the counterclockwise direction are considered to be positive.

The shear forces due to the torsional moments are applied as horizontal nodal forces to the grid points on floor slab levels. Their magnitudes are determined according to the tributary lengths of the nodes.

Out-of-Plane Force of Walls

Out-of-plane forces are considered to walls whose out-of-plane natural frequency is less than 50 Hz. The out-of-plane forces of walls are determined from the average out-of-plane wall accelerations calculated using design horizontal accelerations shown in SER-DMN-019 "RB/FB Seismic Analyses Bounding Results and In-Structure Response Spectra", Reference 2.1.2-k and the horizontal acceleration of wall's oscillators shown in Table 5.3.3-19.

The average out-of-plane wall accelerations are determined using the following procedure:

- Walls are modeled with several oscillators in the dynamic analysis model as shown in Figure 5.3.3-1 to evaluate the characteristics of out-of-plane responses of walls. An equivalent out-of-plane acceleration of all oscillators is calculated using the following equation for each wall:

$${}_w A_{eq} = \frac{\sum {}_w A_i \cdot {}_w W_i}{\sum {}_w W_i}$$

where,

${}_w A_{eq}$: Equivalent acceleration of all oscillators

${}_w A_i$: Maximum acceleration of the i-th oscillator in the dynamic analysis results

${}_w W_i$: Weight of the i-th oscillator in the dynamic analysis model



- A total weight of the wall is not included in its all oscillator in the dynamic analysis model. Some of the weight is included in the RB/FB mass. Therefore, the average out-of-plane wall accelerations are calculated using the following equation:

$${}_W A_{ave} = \frac{({}_W A_{eq} \cdot {}_S W_W + {}_{RB} A \cdot {}_{RB} W_W)}{({}_S W_W + {}_{RB} W_W)}$$

where,

${}_{RB} A$: Average maximum acceleration of top and bottom of the wall in the RB/FB stick

${}_S W_W$: Summation of wall oscillators weights $(= \sum {}_W W_i)$

${}_{RB} W_W$: Wall weights included in the RB/FB (except the ${}_S W_W$)

- The average accelerations, ${}_W A_{ave}$, shown in Table 6.2.3.9-15, are regarded as the design loads for the walls. The accelerations are uniformly applied to all wall grid points.

The out-of-plane seismic forces for walls are applied to all grid points of a wall as horizontal nodal forces. Each nodal force is calculated by multiplying the tributary weight of the node by the out-of-plane acceleration determined for the region containing the node. The tributary weight of the node is obtained using the load combination for the vertical seismic loads, which consists of the dead load and a quarter of the floor live load. (Refer to Subsection 5.1.2.)

6.2.3.9.2 Soil Pressure due to an Earthquake

Loads for two kinds of motion, N-S motion and E-W motion, are considered.

The soil pressure loads are applied to the external walls below grade. The method of applying the pressure is the same as the method for the static soil pressure, which is described in Figures 6.2.3.9-21 through 6.2.3.9-26.

6.2.3.9.3 Seismic Hydrodynamic Loads in Pools

Seismic hydrodynamic loads due to an earthquake are applied to the pool walls and slabs. Three directions of loads are considered corresponding to three directions of seismic loads, i.e., two horizontal and one vertical.

The details of the calculation of these seismic hydrodynamic loads are shown in Appendix A of Reference 2.1.2-k.

The loads are applied to shell elements as uniform pressure loads which are calculated at the centers of gravity of the elements. In the analysis for each direction, the loads in all pools are applied simultaneously.

6.2.3.9.4 RPV Reactions due to Earthquake

RPV reactions due to an earthquake are applied only to the RCCV internal structures. For details of the load application methods, refer to Reference 2.1.2-l.



6.2.3.9.5 Load Combinations for Seismic Loads

Analysis results for seismic loads mentioned above are combined in accordance with the load combinations shown in Table 6.2.3.9-14.

6.2.4 Analysis Results

Figures 6.2.4-1 through 6.2.4-23 indicate deformations of structures obtained by NASTRAN analyses for several design loads.

Tables 6.2.4-1 through 6.2.4-13 show the element forces and moments of the selected elements. The force and moment results for non-seismic load cases are obtained from Reference 2.1.2-e, while the seismic results are obtained from Reference 2.1.2-k. The locations of the selected elements are illustrated in Figures 6.2.4-24 through 6.2.4-34. The elements for tabulation are selected, in principle, from the center and both ends of wall and slab, where it is reasonably expected that the critical stresses appear based on engineering experience and judgment. Element forces and moments listed in the tables are defined with relation to the element coordinate system shown in Figure 6.2.4-35.

6.3 Load Combinations

6.3.1 Code Requirements

Reinforced Concrete Structures

The load combinations and associated load factors and acceptance criteria for reinforced concrete structures outside the containment are summarized in Table 6.3.1-1, which is in compliance with ACI 349-01 and SRP 3.8.4.

For the design of any structures which are integrated with the RCCV structures, the load combinations and associated load factors and acceptance criteria for the RCCV design are also considered. Therefore, Table 6.3.1-2, which is the load combination table for the RCCV design, is considered for the RB structures in addition to Table 6.3.1-1. Table 6.3.1-2 complies with ASME BPVC Sec III 2004.

Steel Structures

The load combinations and associated load factors and acceptance criteria for steel structures outside the containment are summarized in Table 6.3.1-3, which is in compliance with ANSI/AISC N690-1994 Code and SRP 3.8.4.

6.3.2 Selection of Design Load Combinations

Reinforced Concrete Structures

The following load combinations given in Tables 6.3.1-1 and 6.3.1-2 need not be considered, because of the reasons described for each of the load combinations.



No.	Reason
RB-C5	Stresses in the basemat and pool due to wind loads W are negligibly small, and the combination RB-C3 covers these combinations.
RB-C6 RB-C8	These combinations are almost identical to CV-5, CV-7, respectively.
RB-C9	This combination is almost identical to CV-11.
CV-2	Stresses in the basemat and pool due to wind loads W are negligibly small, and the combination CV-3 covers CV-2.
CV-4, 6	Stresses in the basemat and pool due to wind loads W or tornado loads Wt are negligibly small, and these combinations are not critical for their design.
CV-5	This combination is covered by CV-11.
CV-8, 9	These combinations are covered by CV-7.
CV-10	Stresses in the basemat and pool due to wind loads W are negligibly small, and the combination CV-7 covers CV-10.

Finally, the following load combinations are selected for reinforced concrete structures:

- RB-C1, RB-C2, RB-C3, RB-C4, RB-C7, CV-1, CV-3, CV-7, CV-11

Detailed design load combinations are determined in terms of load patterns for the selected load combinations. Load patterns include time of year for thermal loads, time after an accident for LOCA pressure/thermal loads, and load application patterns for hydrodynamic loads. The determined detail design combinations for the RB concrete structures are shown in Table 6.3.2-1. The acceptance criteria for the selected combinations are also included in the tables. In addition, the load combinations selected as critical combinations in Appendix 3G of the ESBWR Design Control Document (DCD) are identified in the tables.

Steel Structures

Among the load combinations listed in Table 6.3.1-3, the following combinations are negligible.

No.	Reason
RB-S1	This combination is covered by RB-S3.
RB-S2	This combination is covered by RB-S4.

The detail design combinations for the steel structures are shown in Table 6.3.2-2 together with acceptance criteria.

Some remarks concerning the determination of the detailed load combinations are mentioned below:



- Two kinds of thermal loads, summer and winter, are considered. Because of the uncertainties in the thermal loads, two combinations which differ only in including the thermal load or not are always included in the detailed load combinations.
- Seismic loads include the following.
 - Seismic hydrodynamic load of the spent fuel pool water
 - RPV Reaction force due to earthquake
 - Dynamic increment of soil pressure
- Dynamic loads, i.e. seismic loads and hydrodynamic loads, are combined according to the SRSS method, as specified in Section 6.3.2 of Reference 2.1.2-m.
- As for hydrodynamic loads, SRV, CO and CH, two patterns of loadings, i.e. full positive and negative, are considered in the design.
- The following loads are considered as LOCA hydrodynamic loads depending on the elapsed time after the LOCA.

Time after LOCA	Load to be considered
5 seconds	Pool Swell + SRV
6 minutes	CO + SRV
10 hours	CH + SRV
72 hours	CH + SRV

- For the tornado loads, the following combinations are considered in accordance with SRP 3.3.2.

$$W_t = W_w$$

$$W_t = W_p$$

$$W_t = W_w + 0.5W_p$$

where,

W_w : Tornado wind load

W_p : Tornado differential pressure load

6.3.3 Result of Load Combination

Tables 6.3.3-1 through 6.3.3-5 show the resultant combined forces and moments for the selected elements shown in Figures 6.2.4-24 through 6.2.4-34, which are calculated for several typical design load combinations selected from the load combinations listed in Table 6.3.2-1.



Section forces due to the following loads are shown independently in the tables.

- OTHR: Loads other than thermal and seismic loads
- TEMP: Thermal loads
- SEIS: Seismic loads
- HYDR: Hydrodynamic loads

Element forces and moments listed in the tables are defined with relation to the element coordinate system shown in Figure 6.2.4-35.

6.4 Section Design Principles

6.4.1 Section Design of Reinforced Concrete Structures

The design/evaluation is essentially performed using ASME, Section III, Division 2. The details of the design/evaluations and the exceptions to the use of ASME, Section III, Division 2 are described in the following Sections. The design flow chart is shown in Figure 6.4.1-1.

Section design calculations are carried out for the following section forces and it is confirmed that the results satisfy code requirements.

- Flexure and Membrane Forces
- Membrane Compressive Forces
- Transverse Shear

The evaluation method for each of the section forces is described in the following subsections.

6.4.1.1 Section Design for Flexure and Membrane Forces

Stress conditions of the RB structure sections are actually very complicated since the various forces, such as axial forces, in-plane shear, bending moments, and torsional moments, are applied simultaneously. It is difficult to estimate the section strength of the section under such a complicated stress condition by the equations which are normally used in the design calculation.

Therefore, stress calculations for flexure and membrane forces are performed by a computer program, SSDP-2D. The program has the following characteristics:

- It calculates concrete and rebar stresses under two-dimensional equilibrium conditions for six components of the section forces in a shell element – two axial forces, two bending moments, in-plane shear, and torsional moment.
- It takes concrete cracks into account in the stress calculation. Cracked concrete is assumed not to bear tensile forces.
- It assumes concrete and rebars to be perfectly elastic.



- It considers the reduction of thermal stresses due to the decreased stiffness of a cracked concrete section.
- Transverse shear is generated in an element but is not considered in the equilibrium conditions. Stresses of shear ties are not calculated with SSDP-2D. The design method for transverse shear is described in Section 6.4.1.3.

In calculations with SSDP-2D, section forces including in-plane shear force, axial forces and bending moments are considered simultaneously. In SSDP-2D, the compressive stress distribution of concrete is based on the linear distribution which is proportional to the strain distribution at the section. Moment capacity based on this condition is more conservative than the moment capacity specified in ACI 349-01 which is based on the stress block for the compressive stress distribution of concrete. As permitted in Section CC-3511.1(e) of ASME, Section III, Division 2, parabolic distribution of concrete compressive stress can be used in the section analysis. Figure 6.4.1-3 compares three axial-flexural capacity curves: (1) ASME capacity with linear concrete compressive stress distribution; (2) ASME capacity with parabolic concrete compressive stress distribution; and (3) ACI 349-01. For the ASME capacities, the primary-plus-secondary allowable stresses for factored load in Tables 6.4.1-2 through 6.4.1-4 are used.

As shown in Figure 6.4.1-3, the ASME capacity with linear concrete compressive stress distribution (used in the SSDP program) is more conservative than ACI 349-01 except in the high axial force (compression) region. This is addressed in Appendix C by performing additional compression check per ACI 349-01. Additionally, in-plane shear check per ACI 349-01 is performed in Appendix B. It is also noted that the ASME capacity with parabolic concrete compressive stress distribution bounds the ACI 349-01 capacity.

As for the thermal effects, section forces due to thermal loads, which are evaluated by NASTRAN analyses using uncracked concrete stiffness, are reduced considering the depth and direction of cracking in calculations with SSDP-2D. The cracked section properties are used in the calculation only for the cracked sections. Furthermore, compatibility between strain distribution in a section and internal forces including reduced thermal stress is examined under an assumed crack condition in calculations with SSDP-2D. The calculations are continued until the compatibility of strain and internal forces are satisfied. During the iterative calculations, redistribution of internal forces and strains are considered adequately.

Table 6.4.1-1 shows the material constants used for the stress calculation. Allowable stresses specified in CC-3420 of ASME-2004 are used in the design, since they are not defined in ACI 349-01. Tables 6.4.1-2 and 6.4.1-3 show the allowable stresses of concrete and rebar.

As specified in Section 6.1 of Reference 2.1.1-c, strengths of concrete and rebars are reduced taking the effects of elevated temperatures into consideration, which are based on the averaged temperature, T_d , obtained from the heat transfer analysis.

Reduction of concrete strength due to high temperature is determined based upon the average value of the following upper bound and lower bound equations:

- Lower bound reduction factor



- $\phi = 1.0 - 0.0030 (T-21.1)$ $21.1^{\circ}\text{C} (70^{\circ}\text{F}) \leq T \leq 121.1^{\circ}\text{C} (250^{\circ}\text{F})$
- $\phi = 0.70 - 0.00083 (T-121.1)$ $121.1^{\circ}\text{C} (250^{\circ}\text{F}) \leq T$

- Upper bound reduction factor

- $\phi = 1.0$ $T \leq 260.0^{\circ}\text{C} (500^{\circ}\text{F})$
- $\phi = 1.0 - 0.00081 (T-260.0)$ $260.0^{\circ}\text{C} (500^{\circ}\text{F}) \leq T$

Reduction of reinforcing steel strength is based upon the following equation:

- Reduction Factor

- $\phi = 1.0 - 0.000873 (T-21.1)$ $21.1^{\circ}\text{C} (70^{\circ}\text{F}) \leq T \leq 204.4^{\circ}\text{C} (400^{\circ}\text{F})$

Allowable stresses listed in Tables 6.4.1-2 and 6.4.1-3 are reduced using these factors in calculations for load combinations, including thermal loads.

6.4.1.2 Section Design for Membrane Compressive Forces

ASME-2004 specifies the allowable concrete stresses for membrane forces. It is necessary to confirm that the compressive stresses of the concrete due to membrane forces do not exceed the allowable stresses specified in CC-3420 of ASME-2004. Examinations for membrane compressive forces are also performed in the RB design in addition to examinations for flexure and membrane forces.

The principal membrane compressive stress σ_c , which is calculated by the following equation, is used for the evaluation.

$$\sigma_c = \frac{\sigma_x + \sigma_y}{2} - \sqrt{\left(\frac{\sigma_x - \sigma_y}{2}\right)^2 + \tau_{xy}^2} \quad (- \text{ for compression, } + \text{ for tension})$$

$$\sigma_x = \frac{N_x}{h}$$

$$\sigma_y = \frac{N_y}{h}$$

$$\tau_{xy} = \frac{N_{xy}}{h}$$

- where
- N_x : x-direction axial force per unit length (tension is positive)
 - N_y : y-direction axial force per unit length (tension is positive)
 - N_{xy} : in-plane shear force per unit length
 - h : element thickness

Table 6.4.1-4 shows the allowable membrane compressive stress of concrete. Reductions due to elevated temperatures described in Subsection 6.4.1.1 are applicable to these allowables.



Confirmation that compressive stresses of the concrete due to membrane forces do not exceed the allowable stresses specified in Section 10.3.5 of ACI 349-01 is provided in Appendix C.

6.4.1.3 Section Design for Transverse Shear

Section design calculations for transverse shear are performed according to ACI 349-01, Chapter 11. It requires that the shear force at a section and section strength satisfy the following equation:

$$V_u \leq \phi(V_c + V_s)$$

where V_u : factored shear force at section per unit length

V_c : nominal shear strength provided by concrete per unit length

V_s : nominal shear strength provided by shear reinforcement per unit length

ϕ : strength reduction factor (=0.85)

The nominal shear strength provided by concrete, V_c , is calculated in accordance with Section 11.3.2 of ACI 349-01. The calculation method is shown in Figure 6.4.1-2. The nominal shear strength provided by shear reinforcement, V_s , is calculated by the following equation:

$$V_s = \rho_v f_y d, \quad V_s \leq 8\sqrt{f'_c}d \quad (\text{in English units})$$

where ρ_v : shear reinforcement ratio

f_y : specified yield strength of rebar

d : distance from extreme compression fiber to centroid of tension reinforcement

f'_c : specified compressive strength of concrete

The transverse shear stress is evaluated in the direction of the maximum shear force, and the section forces for evaluation are calculated by the following equations:

$$V_u = \sqrt{Q_x^2 + Q_y^2}$$

$$M_u = M_x \sin^2 \theta + M_y \cos^2 \theta + 2M_{xy} \sin \theta \cos \theta$$

$$N_u = N_x \sin^2 \theta + N_y \cos^2 \theta + 2N_{xy} \sin \theta \cos \theta$$

$$\theta = \tan^{-1}(Q_x / Q_y)$$

In NASTRAN analyses, the transverse shear forces, i.e., Q_x and Q_y , are calculated independently in X and Y directions, respectively. The resultant transverse shear forces, i.e. the maximum transverse shear force (V_u), is calculated with the SRSS method in order to



consider transverse shear forces in two directions simultaneously. The value, θ means the direction of the maximum shear force. The values N_u and M_u are also evaluated in the direction of the maximum shear force.

6.4.2 Section Design of Steel Structures

Section design of steel member is performed according to ANSI/AISC N690-94. Steel members, i.e., roof trusses and supporting columns, are examined by the evaluation method described in the following subsections.

The design flow of steel structures is almost the same as the flow of reinforced concrete structures which is shown in Figure 6.4.1-1. However, reductions of thermal stresses are not considered for the steel design.

6.4.2.1 Section Design for Axial Compression and Bending

Steel members subjected to both axial compression and bending stresses shall be proportioned to satisfy the following requirements:

$$\frac{f_a}{F_a} + \frac{C_{mx}f_{bx}}{\left(1 - \frac{f_a}{F'_{ex}}\right)F_{bx}} + \frac{C_{my}f_{by}}{\left(1 - \frac{f_a}{F'_{ey}}\right)F_{by}} \leq 1.0 \quad (6.4.2-1)$$

$$\frac{f_a}{0.60F_y} + \frac{f_{bx}}{F_{bx}} + \frac{f_{by}}{F_{by}} \leq 1.0 \quad (6.4.2-2)$$

When $f_a/F_a \leq 0.15$, Equation (6.4.2-3) is permitted in lieu of Equations (6.4.2-1) and (6.4.2-2):

$$\frac{f_a}{F_a} + \frac{f_{bx}}{F_{bx}} + \frac{f_{by}}{F_{by}} \leq 1.0 \quad (6.4.2-3)$$

In Equations (6.4.2-1), (6.4.2-2) and (6.4.2-3), the subscripts x and y , combined with subscripts b , m and e , indicate the axis of bending about which a particular stress or design property applies, and

F_a = Axial compressive stress that would be permitted if axial force alone existed, ksi

F_b = Compressive bending stress that would be permitted if bending moment alone existed, ksi

$$F'_e = \frac{12\pi^2 E}{23(Kl_b / r_b)^2}$$

= Euler stress divided by a factor of safety, ksi (In the expression for F'_e ; l_b is the actual unbraced length in the plane of bending and r_b is the corresponding radius of gyration. K is the effective length factor in the plane of bending.)



f_a = Computed axial stress, ksi

f_b = Computed compressive bending stress at the point under consideration, ksi

C_m = Coefficient whose value shall be taken as follows:

- a. For compression members in frames subject to joint translation (sidesway),
 $C_m = 0.85$.

- b. For rotationally restrained compression members in frames braced against joint translation and not subject to transverse loading between their supports in the plane of bending,

$$C_m = 0.6 - 0.4 (M_1/M_2)$$

where M_1/M_2 is the ratio of the smaller to larger moments at the ends of that portion of the member unbraced in the plane of bending under consideration. M_1/M_2 is positive when the member is bent in reverse curvature, negative when bent in single curvature.

- c. For compression members in frames braced against joint translation in the plane of loading and subjected to transverse loading between their supports, the value of C_m may be determined by an analysis. However, in lieu of such analysis, the following values are permitted:

- i. For members whose ends are restrained against rotation in the plane of bending $C_m = 0.85$

- ii. For members whose ends are unrestrained against rotation in the plane of bending $C_m = 1.0$

6.4.2.2 Section Design for Axial Tension and Bending

Steel members subjected to both axial tension and bending stresses shall be proportioned at all points along their length to satisfy the following requirement:

$$\frac{f_a}{F_t} + \frac{f_{bx}}{F_{bx}} + \frac{f_{by}}{F_{by}} \leq 1.0 \quad (6.4.2-4)$$

where f_b is the computed bending tensile stress, f_a is the computed axial tensile stress, F_b is the allowable bending stress and F_t is the governing allowable tensile stress.

6.4.2.3 Section Design for Transverse Shear

Steel members subjected to transverse shear stress shall be proportioned to satisfy the following requirement:



$$\frac{f_v}{F_v} \leq 1.0 \quad (6.4.2-5)$$

where f_v is the computed shear stress and F_v is the governing allowable shear stress.

6.4.2.4 Allowable Stresses

6.4.2.4.1 Allowable Axial Tensile Stress

On the gross section of axially loaded tension members, the allowable stress is:

$$F_t = 0.60F_y \quad (6.4.2-6)$$

where F_y is the specified minimum yield stress of the type of steel being used, ksi.

6.4.2.4.2 Allowable Axial Compressive Stress

On the gross section of axially loaded compression members, when Kl/r , the largest effective slenderness ratio of any unbraced segment is less than C_c , the allowable stress is:

$$F_a = \frac{\left[1 - \frac{(Kl/r)^2}{2C_c^2}\right] F_y}{\frac{5}{3} + \frac{3(Kl/r)}{8C_c} - \frac{(Kl/r)^3}{8C_c^3}} \quad (6.4.2-7)$$

where

$$C_c = \sqrt{\frac{2\pi^2 E}{F_y}}$$

E = Modulus of elasticity of steel, ksi

On the gross section of axially loaded compression members, when Kl/r exceeds C_c , the allowable stress is:

$$F_a = \frac{12\pi^2 E}{23(Kl/r)^2} \quad (6.4.2-8)$$

6.4.2.4.3 Allowable Bending Stress of W-shaped Members (Strong Axis Bending)

The allowable stress for the strong axis bending of W-shaped members is given according to the procedure shown in Figure 6.4.2-1.

6.4.2.4.4 Allowable Bending Stress of W-shaped Members (Weak Axis Bending)

The allowable stress for the weak axis bending of W-shaped members is given according to the procedure shown in Figure 6.4.2-2.



6.4.2.4.5 Allowable Bending Stress of Box Members

The allowable bending stress of box members is given according to the procedure shown in Figure 6.4.2-3.

6.4.2.4.6 Allowable Shear Stress

For $h/t_w \leq 380/\sqrt{F_y}$, on the overall depth times the web thickness, the allowable shear stress is:

$$F_v = 0.40F_y \quad (6.4.2-9)$$

For $h/t_w > 380/\sqrt{F_y}$, the allowable shear stress on the clear distance between flanges times the web thickness is:

$$F_v = \frac{F_y}{2.89}(C_v) \leq 0.40F_y \quad (6.4.2-10)$$

where

$$C_v = \frac{45000k_v}{F_y(h/t_w)^2} \quad \text{when } C_v \text{ is less than } 0.8$$

$$= \frac{190}{h/t_w} \sqrt{\frac{k_v}{F_y}} \quad \text{when } C_v \text{ is more than } 0.8$$

$$k_v = 4.00 + \frac{5.34}{(a/h)^2} \quad \text{when } a/h \text{ is less than } 1.0$$

$$= 5.34 + \frac{4.00}{(a/h)^2} \quad \text{when } a/h \text{ is more than } 1.0$$

t_w = thickness of web, in.

a = clear distance between transverse stiffeners, in.

h = clear distance between flanges at the section under investigation, in.

7. SUMMARY OF RESULTS

7.1 Required Section

Figures 7.1-1 through 7.1-4 shows typical sections of the RB concrete structures.

The sections of the steel members are shown in Figure 7.1-5.

7.2 Provided Section

The sections of the RB structures that have been provided are identical to the required sections described in Section 7.1.



7.3 Tabulation of Allowable Stresses versus Calculated Stresses

7.3.1 Reinforced Concrete Structure

7.3.1.1 Calculations for Flexure and Membrane Forces

The stresses of the concrete and reinforcing steel are calculated for flexure and membrane forces. The calculations are performed for the selected design load combinations shown in Table 6.3.2-1, and it is confirmed that all values are less than their allowable stresses.

The calculation results for the selected elements shown in Figures 6.2.4-24 through 6.2.4-34 are given in this report. The thicknesses and the rebar arrangements of selected elements are shown in Table 7.3.1.1-1. The arrangement of shear tie at the exterior wall on column R7 at EL 22,500 to EL 24,600 is updated from standard design as shown in red in Table 7.3.1.1-1.

Calculated and allowable stresses are compared in Tables 7.3.1.1-2 through 7.3.1.1-6 for several load combinations.

Table 7.3.1.1-7 gives a summary of the maximum stress ratios, which are ratios of the maximum stresses to the allowable stresses.

For RB shear walls, the maximum stress of the vertical rebar is found to be 319.7 MPa (46.36 ksi) at Section 23 due to the load combination RB-9b against the allowable stress of 372.2 MPa (53.97 ksi) as shown in Table 7.3.1.1-6. The maximum stress of the horizontal rebar is found to be 246.0 MPa (35.67 ksi) at Section 22 due to the load combination RB-9b against the allowable stress of 372.2 MPa (53.97 ksi) as shown in Table 7.3.1.1-6. The maximum concrete stress is found to be -17.9 MPa (-2.60 ksi), which occurs at Section 20 due to load combination RB-8b against the allowable stress of -29.3 MPa (-4.25 ksi), as shown in Table 7.3.1.1-4.

For RB foundation mat outside containment, Section 24 is selected for the foundation mat outside the containment at the junction with the cylindrical wall below the RCCV wall. The maximum stress of the top rebar is found to be 152.3 MPa (22.08 ksi) due to the load combination RB-9a against the allowable stress of 372.2 MPa (53.97 ksi) as shown in Table 7.3.1.1-5. The maximum stress of bottom rebar is found to be 59.4 MPa (8.61 ksi) due to the load combination RB-9a against the allowable stress of 372.2 MPa (53.97 ksi), also as shown in Table 7.3.1.1-5. The maximum concrete stress is found to be -5.2 MPa (-0.75 ksi) due to load combination RB-9b against the allowable stress of -23.5 MPa (-3.41 ksi), as shown in Table 7.3.1.1-6.

For floor slabs, Sections 25 to 27 are selected for the floor slabs at elevations EL 4,650, EL 17,500 and EL 27,000 at their junction with the RCCV. The maximum rebar stress of 273.0 MPa (39.59 ksi) due to the load combination RB-8b is found at Section 26 against the allowable stress of 372.2 MPa (53.97 ksi) as shown in Table 7.3.1.1-4. The maximum concrete stress is found to be -21.4 MPa (-3.10 ksi), which occurs at Section 25 due to load combination RB-9b against the allowable stress of -29.3 MPa (-4.25 ksi), as shown in Table 7.3.1.1-6.



For Pool Girders, Sections 28 to 30 are examined. The maximum rebar stress of 271.6 MPa (39.38 ksi) due to the load combination RB-9b is found in the horizontal rebar at Section 29 against the allowable stress of 358.3 MPa (51.95 ksi) as shown in Table 7.3.1.1-6, whereas the maximum vertical rebar stress is found to be 252.9 MPa (24.61 ksi) due to the load combination RB-9b at Section 28 against the allowable stress of 369.8 MPa (53.62 ksi) as shown in Table 7.3.1.1-6. The maximum concrete stress is found to be -13.7 MPa (-1.99 ksi), which occurs at Section 30 due to load combination RB-9b against the allowable stress of -27.4 MPa (-3.97 ksi), as shown in Table 7.3.1.1-6.

For MS tunnel, Section 31 is selected for the MS tunnel wall and slabs. The maximum rebar stress is found to be 230.6 MPa (33.44 ksi) due to the load combination RB-9b against the allowable stress of 372.2 MPa (53.97 ksi) as shown in Table 7.3.1.1-6. The maximum concrete stress is found to be -13.6 MPa (-1.97 ksi) due to load combination RB-4 against the allowable stress of -29.3 MPa (-4.25 ksi), as shown in Table 7.3.1.1-2.

For IC/PCCS Pool, Section 32 is selected for the pool wall in the NS direction. The maximum stress of the vertical rebar is found to be 98.5 MPa (14.28 ksi) due to the load combination RB-9a against the allowable stress of 364.7 MPa (52.88 ksi) as shown in Table 7.3.1.1-5. The maximum stress of the horizontal rebar is found to be 82.6 MPa (11.98 ksi) due to the load combination RB-8b against the allowable stress of 343.4 MPa (49.79 ksi) as shown in Table 7.3.1.1-4. The maximum concrete stress is found to be -6.7 MPa (-0.97 ksi) due to load combination RB-9b against the allowable stress of -25.4 MPa (-3.68 ksi), as shown in Table 7.3.1.1-6.

7.3.1.2 Calculations for Membrane Compressive Forces

The compressive stress of concrete is calculated for membrane forces. The calculations are performed for the selected design load combinations shown in Table 6.3.2-1, and it is confirmed that the values are less than the allowable stress.

Table 7.3.1.2-1 gives a summary of the maximum compressive stresses for selected elements shown in Figures 6.2.4-24 through 6.2.4-34.

For RB shear walls, the maximum membrane compressive stress is found to be -9.942 MPa (-1.442 ksi) against the allowable stress of -25.9 MPa (-3.756 ksi) at Section 22, exterior wall at EL 4,650 to EL 6,600 as shown in Table 7.3.1.2-1.

For RB foundation mat outside containment, Section 24 is selected for the foundation mat outside the containment at the junction with the cylindrical wall below the RCCV wall. The maximum membrane compressive stress is found to be -1.855 MPa (-0.269 ksi) against the allowable stress of -16.6 MPa (-2.407 ksi) as shown in Table 7.3.1.2-1.

For floor slabs, Sections 25 to 27 are selected for the floor slabs at elevations EL 4,650, EL 17,500 and EL 27,000 at their junction with the RCCV. The maximum membrane compressive stress is found to be -14.169 MPa (-2.055 ksi) against the allowable stress of -25.9 MPa (-3.756 ksi) as shown in Table 7.3.1.2-1.

For Pool Girders, the maximum membrane compressive stress is found to be -9.962 MPa (-1.444 ksi) against the allowable stress of -25.9 MPa (-3.756 ksi) as shown in Table 7.3.1.2-



1.

For MS tunnel, Section 31 is selected for the MS tunnel wall and slabs. The maximum membrane compressive stress is found to be -1.393 MPa (-0.202 ksi) against the allowable stress of -15.5 MPa (-2.248 ksi) as shown in Table 7.3.1.2-1.

For IC/PCCS Pool, Section 32 is selected for the pool wall in the NS direction. The maximum membrane compressive stress is found to be -6.860 MPa (-0.995 ksi) against the allowable stress of -25.9 MPa (-3.756 ksi) as shown in Table 7.3.1.2-1.

7.3.1.3 Calculations for Transverse Shear

The transverse shear strength is calculated and compared with shear forces generated by design loads. The calculations are performed for the selected design load combinations shown in Table 6.3.2-1, and it is confirmed section forces are less than the shear strength of sections.

Table 7.3.1.3-1 gives a summary of the examinations for selected elements shown in Figures 6.2.4-24 through 6.2.4-34. Table 7.3.1.3-2 shows the calculation results for the load combinations selected for the DCD that are indicated in Table 6.3.1-1.

For RB shear walls, the maximum transverse shear force is found to be 4.95 MN/m (28.26 kips/in) against the shear strength of 6.61 MN/m (37.73 kips/in) at Section 20, the top of the cylindrical wall below the RCCV wall as shown in Table 7.3.1.3-2.

For the RB foundation mat outside containment, Section 24 is selected for the foundation mat outside the containment at the junction with the cylindrical wall below the RCCV wall. The maximum transverse shear force is found to be 6.34 MN/m (36.19 kips/in) against the shear strength of 15.69 MN/m (89.57 kips/in) as shown in Table 7.3.1.3-2.

For floor slabs, Sections 25 to 27 are selected for the floor slabs at elevations EL 4,650, EL 17,500 and EL 27,000 at their junction with the RCCV. The maximum transverse shear force is found to be 8.30 MN/m (47.38 kips/in) against the shear strength of 10.65 MN/m (60.81 kips/in) as shown in Table 7.3.1.3-2.

For Pool Girders, the maximum transverse shear force is found to be 1.02 MN/m (5.82 kips/in) against the shear strength of 5.58 MN/m (31.85 kips/in) as shown in Table 7.3.1.3-2.

For MS tunnel, Section 31 is selected for the MS tunnel wall and slabs. The maximum transverse shear force is found to be 0.57 MN/m (3.26 kips/in) against the shear strength of 5.74 MN/m (32.78 kips/in) as shown in Table 7.3.1.3-2.

For IC/PCCS Pool, Section 32 is selected for the pool wall in the NS direction. The maximum transverse shear force is found to be 0.23 MN/m (1.31 kips/in) against the shear strength of 2.42 MN/m (13.81 kips/in) as shown in Table 7.3.1.3-2.

7.3.2 Steel Structure

The stresses of the steel members are combined in accordance with Table 6.3.2-2, and it is confirmed that all values are less than the allowable stresses in accordance with the procedure in Subsection 6.4.2.



Table 7.3.2-1 lists the calculation results of the selected sections included in Figure 7.3.2-1. The stress ratios of the design stresses against their allowable stresses shown in the tables are the maximum ratios among all the load combinations.

7.4 Missile Impact Evaluations

Appendix A in Reference 2.1.2-e describes the design methodology and results of evaluation for exterior walls and roof slab of the Nuclear Island (NI) Seismic Category I (C-I) buildings against the tornado missile impact.

Appendix C in Reference 2.1.2-e describes the design methodology and evaluation for the effect of the impact of an automobile tornado missile on the RB structures including outer walls, roof slabs, trusses, and columns.

8. CONCLUSIONS

The site-specific stress check calculations for the RB structure are performed to evaluate the structural integrity of the RB at the NA3 site per the specifications of ACI 349-01, ASME-2004, and ANSI/AISC N690-1994, following the same methodology as that used for the standard design. The stress checks are based on the results of the global model analyses for the site-specific seismic loads combined together with the non-seismic load results from Reference 2.1.2-e according to site-specific seismic load combinations. The conclusions from the site-specific stress checks are summarized as follows:

- Reinforced concrete structures
 - The stresses of the concrete and rebar are less than the allowable stresses specified in the code.
 - The sections have enough strength to bear transverse shear forces generated by design loads.
- Steel structures
 - The stresses of steel members are less than the allowable stresses specified in the code.

Therefore, it can be concluded that the standard design of the RB structure is adequate to resist the NA3 site-specific SSE loads in combination with non-seismic standard plant loads.

The arrangement of shear ties at the exterior wall at EL 22,500 to EL 24,600 is updated from standard design to resolve the overstress for element 24211. These updates are shown in red in Table 7.3.1.1-1.

The comparisons between NA3 and the standard design are shown in Appendix A.

In addition, the following structural evaluation is performed for the RB separately:

- The stability of the RB/FB at the NA3 site is demonstrated to resist the dynamic load demand without the shear keys that are part of the standard design of the RB/FB, as



HITACHI

WG3-U71-ERD-S-0004 SH NO. 62

REV. 2 of 543

described in the "Reactor/Fuel Building Complex Stability Analysis Report," Reference 2.1.2-h.

**Table 3.1-1 Key Dimensions of RB and FB**

Building	Dimension		Notes
Reactor Building	Story	six stories (above grade) three stories (below grade)	Grade is 16.0 m from the top of basemat
	Plan	49.0 m × 49.0 m (below EL 34.0 m) 49.0 m × 39.0 m (above EL 34.0 m)	
	Height	64.2 m	From the top of the basemat
Fuel Building	Story	one story (above grade) three stories (below grade)	(excluding the penthouse) Grade is 16.0 m from the top of basemat
	Plan	21.0 m × 49.0 m	
	Height	34.0 m	From the top of the basemat (excluding the penthouse)
Common	Thickness of Basemat	4.0 m	The thickness is increased to 5.1 m at the inside of RPV Pedestal and 5.5 m at the bottom of the Spent Fuel Pool.

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 64

REV. 2

of 543

Table 3.1-2 Key Dimensions of RCCV

Portion	Dimension	Notes
Foundation mat	Thickness = 5.1 m	
Containment wall	Thickness = 2.0 m	
	Inside radius = 18.0 m	
	Height = 19.95 m	From the top of the suppression pool slab to the bottom of the Top Slab
RPV pedestal	Thickness = 2.5 m	
	Inside radius = 5.6 m	
	Height = 15.05 m	From the top of the foundation mat to the top of the suppression pool slab
Top slab	Thickness = 2.4 m	
Suppression pool slab	Thickness = 2.0 m	



Table 5.1.1-1 Weights of Miscellaneous Steels and Finishing

(Reproduced from Reference 2.1.2-e)

Item			Weight	Note
Roof Truss (EL 49700)			3.8 kN/m ²	
Metal Deck and Steel Beams	Roof Slabs		1.2 kN/m ²	
	Floor Slabs		3.0 kN/m ²	Except basemat
Finishing	Slab	Roof Slabs	1.8 kN/m ²	
		Floor Slabs	1.0 kN/m ²	
	Outside Exterior Wall	Below Grade	0.2 kN/m ²	
		Above Grade	1.2 kN/m ²	
Various Pool Liner	Cavity Pool	Walls	1.0 kN/m ²	
		Slabs	0.7 kN/m ²	
	Dryer/Separator Pool	Walls	1.0 kN/m ²	
		Slabs	0.7 kN/m ²	
	Fuel Buffer Pool	Walls	1.0 kN/m ²	
		Slabs	1.6 kN/m ²	
	IC/PCCS Pool & Extension Pool	Walls	1.0 kN/m ²	
		Slabs	0.7 kN/m ²	
	Spent Fuel Pool	Walls	1.0 kN/m ²	
		Slabs	1.6 kN/m ²	
	Fuel Transfer Tube Pool	Walls	-	Not considered
		Slabs	-	Not considered
Gate	Dryer/Separator Pool		-	Not considered
	Reactor Well		-	Not considered
	Fuel Transfer Channel Pool		-	Not considered

Note: The values shown in this table are based on the following Design Specifications:

26A6605 Design Specification for Concrete Containment, Rev. 3

26A6606 Design Specification for Reactor Building, Rev. 2

26A6608 Design Specification for Fuel Building, Rev. 1



Table 5.1.1-2 Miscellaneous Structures, Piping, and Commodities Attached to the RCCV
(Reproduced from Reference 2.1.2-e)

Location	Area Load (kN/m ²)	Concentrated Load (kN)
RCCV Top Slab Liner	2.5	-
Upper Drywell Wall Liner	2.7	-
Suppression Chamber Wall Liner	1.6	-
Suppression Chamber Floor Liner	1.6	-
Lower Drywell Wall Liner	3.1	-
Lower Drywell Floor Liner	0.6	-
Drywell Top Head	-	1100.0
Upper Drywell Personnel Airlock	-	200.0
Upper Drywell Equipment Hatch	-	110.0
Suppression Chamber Access Hatch	-	90.0
Lower Drywell Personnel Airlock	-	200.0
Lower Drywell Equipment Hatch	-	110.0

Note: The values shown in this table are based on the following Design Specifications:

26A6605 Design Specification for Concrete Containment, Rev. 3

26A6606 Design Specification for Reactor Building, Rev. 2

26A6608 Design Specification for Fuel Building, Rev. 1



Table 5.1.1-3 Miscellaneous Structures, Piping, and Commodities on the Slabs
(Reproduced from Reference 2.1.2-e)

Elevation (m)	Piping Area Load (kN/m ²)		Note
	RB	FB	
52.40 ^{*1}	2.4	-	
34.00	2.4	-	
27.50	-	0.0	FB Roof Slab
27.00	2.4	-	
22.50	-	2.4	
17.50	9.8	-	Diaphragm Floor
	19.6	-	Main Steam Tunnel
	2.4	-	Other Area
13.57	2.4	-	
9.06	2.4	-	
4.65	2.4	2.4	
-1.00	2.4	2.4	
-6.40	2.4	2.4	
-11.50	2.4	2.4	

General Note: The values shown in this table are based on the following Design Specifications:

26A6605 Design Specification for Concrete Containment, Rev. 3

26A6606 Design Specification for Reactor Building, Rev. 2

26A6608 Design Specification for Fuel Building, Rev. 1

Note

*1: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 68

REV. 2

of 543

Table 5.1.1-4 Miscellaneous Structures, Piping, and Commodities on the RCCV Walls**(Reproduced from Reference 2.1.2-e)**

Elevation (m)	Piping Area Load (kN/m²)	Portion
17.5~27.0	2.4	Upper Drywell
13.57~17.5	2.4	Upper Drywell
9.06~13.57	2.4	Wetwell
4.65~9.06	2.4	Wetwell
-1.00~4.65	2.4	Lower Drywell
-6.40~-1.00	2.4	Lower Drywell
-11.50~-6.4	2.4	Lower Drywell



Table 5.1.1-5 Dead Loads of Equipment, RB
(Reproduced from Reference 2.1.2-e)

Elevation (m)	Item No.*	Description	Weight				Area Load (kN/m ²)
			unit (kN)	qt.	margin	Sum up (kN)	
-11.50	R-1	Sacrificial Concrete	-	-	-	-	36
	R-2	HCU Room A~D	643	4	0.2	3086	-
	R-3	RWCU Non-Regen Heat Exchanger	113	3	0.2	406	-
	R-4	RWCU Regen Heat Exchanger	44	2	0.2	106	-
	R-5	RWCU Pump Room A, B	216	2	0.2	518	-
	R-6	Process Sampling Monitoring Room	95	1	0.2	114	-
	R-7	RWCU Transfer Pumps Room	34	1	0.2	41	-
-6.40	R-11	RWCU Filter Demineralizers Vault A1, A2, B1, B2	284	4	0.2	1365	-
	R-12	Control Rod Drive Pump Room	236	1	0.2	284	-
	R-13	Divisional Battery Rooms	1079	4	0.2	5178	-
-1.00	R-21	Divisional I~ IV Electrical Equipment Rooms	588	4	0.2	2824	-
4.65	R-31	Quenchers	35	12	0.2	509	-
	R-32	CRD A ~ D Panel Room	490	4	0.2	2354	-
9.60	R-41	Electrical Equipment Rooms A~D	637	4	0.2	3060	-
13.57	R-51	Wetwell Access/Fan Room	118	4	0.2	565	-
27.00	R-71	Isolation Condensers Heat Exchanger Room A~D	333	4	0.2	1601	-
	R-72	Passive Containment Cooling Heat Exchanger Room A~F	233	6	0.2	1681	-
	R-73	Standby Liquid Control Tank Room A, B	530	2	0.2	1271	-
	R-74	Standby Liquid Control Tank Pump A, B	20	3	0.2	71	-
	R-75	Fuel Storage Racks	-	-	-	-	153
	R-76	Skimmer Tanks	382	2	0.2	918	-
34.00	CR-4	Refueling Machine	343	1	0.2	412	-
39.80	CR-5	Reactor Building Crane	1422	1	0.2	1706	-
	CR-6	Lifted Loads	1750	1	-	1750	-

General Note: The values shown in this table are based on the following Design Specifications:

26A6605 Design Specification for Concrete Containment, Rev. 3

26A6606 Design Specification for Reactor Building, Rev. 2

26A6608 Design Specification for Fuel Building, Rev. 1

Note *: Refer to Figures 5.1.1-1 through 5.1.1-9.

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 70

REV. 2

of 543

Table 5.1.1-6 Dead Loads of Equipment, FB**(Reproduced from Reference 2.1.2-e)**

Elevation (m)	Item No. ^	Description	Weight				Area Load (kN/m ²)
			unit (kN)	qt.	margin	Sum up (kN)	
-11.50	F-1	Skimmer Tank	353	1	0.2	424	-
	F-2	Spent Fuel Racks	16239	1	0.2	19487	-
	F-3	Spent Fuel Cask	-	-	-	-	120
	F-4	Fuel and Auxiliary Pools Cooling Backwash Tank Room	353	1	0.2	424	-
	F-5	Fuel and Auxiliary Pools Cooling Heat Exchange Room	236	1	0.2	284	-
	F-6	Sump Room	95	1	0.2	114	-
	F-7	Fuel and Auxiliary Pools Cooling Transfer Pump Room	17	2	0.2	41	-
	F-8	Fuel and Auxiliary Pools Cooling Pump Room	112	1	0.2	134	-
-6.40	F-11	Fuel and Auxiliary Pools Cooling Filter/Demineralizer Vault	142	2	0.2	341	-
	F-12	FAPC Holding Pump Room	37	1	0.2	45	-
	F-13	Control Rod Drive Maintenance Area	49	1	0.2	59	-
	F-14	Control Rod Drive Maintenance Control Panel Room	38	1	0.2	46	-
	F-15	Control Rod Drive Motor Test Room	98	1	0.2	118	-
-1.00	F-21	New Fuel Prep Machine Pit	12	1	0.2	15	-
4.65	CR-1	Fuel Handling Machine	343	1	0.2	412	-
13.57	CR-2	Fuel Building Crane	1079	1	0.2	1295	-
	CR-3	Lifted Load	1750	1	-	1750	-
22.50	F-61a	HVAC Penthouse	112	2	0.2	269	-
	F-61b	HVAC Penthouse	112	2	0.2	269	-
	F-61c	HVAC Penthouse	174	2	0.2	416	-
	F-61d	HVAC Penthouse	322	2	0.2	772	-
	F-61e	HVAC Penthouse	292	2	0.2	701	-

General Note: The values shown in this table are based on the following Design Specifications:

26A6605 Design Specification for Concrete Containment, Rev. 3

26A6606 Design Specification for Reactor Building, Rev. 2

26A6608 Design Specification for Fuel Building, Rev. 1

Note *: Refer to Figures 5.1.1-1 through 5.1.1-9



Table 5.1.1-7 Dead Loads of Hydrostatic Loads
(Reproduced from Reference 2.1.2-e)

Location	Water Depth (m)	Pressure (kN/m ²)	Note
Cavity Pool	6.7	66.0	
	2.9	28.0	On the Drywell Top Head
Dryer / Separator Pool	6.7	66.0	
Fuel Buffer Pool	6.7	66.0	
IC / PCCS Pool	4.8	47.0	
IC / PCCS Expansion Pools	4.8	47.0	
GDCS Pools	6.8	67.0	
Lower Drywell	12.37	121.0	During LOCA Flooding
Suppression Pool	5.5	54.0	
	6.55	64.0	During LOCA Flooding
Spent Fuel Pool	14.35	141.0	



Table 5.1.2-1 Floor Live Loads
(Reproduced from Reference 2.1.2-e)

Elevation (m)	Area Load (kN/m ²)		Remarks
	RB	FB	
52.40 ^{*1}	2.9	-	Roof
34.00	4.8	-	Indoor Slab
	2.9	-	Roof Slab
27.50	-	2.9	FB Roof Slab of Penthouse
27.00	4.8 ^{*2}	-	
	2.9	-	Main Steam Tunnel Roof
22.50	-	2.9	
17.50	4.8	-	
	0.0	-	Main Steam Tunnel Floor
13.57	4.8	-	
9.06	4.8	-	
4.65	4.8	4.8 ^{*2}	
-1.00	4.8	4.8	
-6.40	4.8	4.8	
-11.50	4.8	4.8	

Note

*1: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.

*2: Live load at pool water area is zero.

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 73

REV. 2

of 543

Table 5.1.2-2 Design Lateral Soil Pressure At-Rest
(Reproduced from Reference 2.1.2-e)

Elevation (m)	Soil Pressure (kN/m ²)			Note
	RB on R1 column-row Wall	FB on FA column-row Wall	Other Walls	
4.65	11.0	175.4	11.0	Grade
4.04	21.9	186.3	21.9	Water level
-1.00	127.7	292.1	127.7	Bottom level of TB basemat
-4.20	194.9	359.3	194.9	
-4.20	457.9			
-6.40	504.1	405.5	241.0	
-11.50	611.1	512.5	348.1	Bottom level of basemat
-15.50	695.1	596.5	432.0	



Table 5.2.1-1 Design Pressure Loads for Containment and IC/PCCS Pools
(Reproduced from Reference 2.1.2-e)

Event		Pressure (kPag)		
		Drywell	Wetwell	IC/PCCS Pool
Normal Operation		9.0	9.0	34.5
Test	maximum internal pressure	356.8	356.8	0.0
	maximum differential pressure	310.0	32.5	0.0
LOCA	5 seconds after DBA	(345.0)*	(250.0)*	48.3
	6 minutes after DBA	257.0	241.0	48.3
	10 hours after DBA	310.0	310.0	48.3
	72 hours after DBA	310.0	310.0	48.3

Note *: The pressure loads at 5 seconds are considered in the load of Pool Swell Pressure Loads.

Table 5.2.1-2 Design Times for LOCAs
(Reproduced from Reference 2.1.2-e)

Selected Time	Reasons for Selection
5 seconds	Just after LOCA Combination including Pool Swell
6 minutes (0.1 hr.)	Containment temperatures reach their maximum values Combination including Condensation Oscillation
10 hours	Containment pressures reach their maximum values Combination including Chugging
72 hours	Concrete temperatures reach their maximum values Combination including Chugging

**Table 5.2.2-1 Steady State Temperature Conditions****(Reproduced from Reference 2.1.2-e)**

Region		Temperature (°C)		Note
		Summer	Winter	
Main Steam Tunnel		57.0	57.0	
Inside Containment	Drywell	57.0	57.0	
	GDCS pool	43.0	43.0	
	Wetwell & Suppression pool	43.0	43.0	
RB Outside Containment	RB rooms outside containment	40.0	10.0	
	Reactor Cavity pool	43.0	43.0	
	Dryer/Separator Storage pool	43.0	43.0	
	Fuel Buffer pool	43.0	43.0	
	IC/PCCCS pool	43.0	43.0	
FB	FB rooms	40.0	10.0	
	Spent Fuel Pool	48.9	48.9	
Exterior		46.1	-40.0	
Ground		15.5	15.5	

Table 5.2.2-2 Design Basis Accident Temperatures in Spent Fuel Pool**(Reproduced from Reference 2.1.2-e)**

Time		Temperature (°C)
(hr.)	(sec)	
0.00	0	48.9
0.06	200	49.2
0.28	1000	50.5
0.50	1800	51.8
1.00	3600	54.7
5.00	18000	77.7
8.86	31900	100.0
10.00	36000	100.0
20.00	72000	100.0
72.00	259200	100.0

Note: DBA for the spent fuel pool is due to loss of Fuel and Auxiliary Pools Cooling System (FAPCS) cooling function



HITACHI

WG3-U71-ERD-S-0004 SH NO. 76

REV. 2

of 543

Table 5.2.4-1 RPV Reactions
(Reproduced from Reference 2.1.2-e)

		SRV	LOCA
Vertical	(MN)	16.45	9.25
Shear	(MN)	11.63	2.878
Moment	(MNm)	75.3	28.7



Table 5.3.1-1 Design Wind Pressure Loads by Floor Level

(Reproduced from Reference 2.1.2-e)

Height (m)		Design Wind Load (kN/m ²)			
EL	Z	Windward Wall	Leeward Wall	Side Wall	Roof
52.40 ^{*1}	47.75	3.13	-2.20	-2.82	-3.87
34.00	29.35	2.93	-2.20	-2.82	-3.87
27.00	22.35	2.82	-2.20	-2.82	
17.50	12.85	2.62	-2.20	-2.82	
13.57	8.92	2.50	-2.20	-2.82	
9.22	4.57	2.30	-2.20	-2.82	
9.06	4.41	2.30	-2.20	-2.82	
4.65	0.00	2.30	-2.20	-2.82	

zg 700 ft

 α 11.5

Importance factor I 1.15

Basic wind speed V 62.59 m/s

Wind directionality factor Kd 0.85

Coef.	Wall			Roof
	Windward	Leeward	Side	
G	0.85			
Cp	0.8	-0.5	-0.7	-1.04
GCpi	-0.18	0.18	0.18	0.18

Note

*1: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.

Table 5.3.2-1 Design Pressure of Tornado Wind Load

(Reproduced from Reference 2.1.2-e)

Wind Direction	Building	p (kN/m ²)			
		Wall			Roof
		Windward	Leeward	Side	
All	RB/FB	5.6	-3.5	-4.9	-7.3
Differential		16.5	16.5	16.5	16.5

**Table 5.3.3-1 Effect of Containment LOCA Flooding - Standard Plant Hard Rock Site**

Structure	Direction	Response	RU-4 ^{*1}	RU-6 ^{*2}	Difference
RSW	NS	Shear (MN) @ base	15	16	6.7%
		Moment (MN-m) @ base	165	174	5.5%
	EW	Shear (MN) @ base	15	16	6.7%
		Moment (MN-m) @ base	183	190	3.8%
	Vert.	Vertical acc (g) at top	0.58	0.57	-1.7%
Vent Wall	NS	Shear (MN) @ base	18	19	5.6%
		Moment (MN-m) @ base	160	157	-1.9%
	EW	Shear (MN) @ base	21	22	4.8%
		Moment (MN-m) @ base	187	173	-7.5%
	Vert.	Vertical acc (g) at top	0.68	0.62	-8.8%
Pedestal	NS	Shear (MN) @ base	104	104	0.0%
		Moment (MN-m) @ base	1531	1556	1.6%
	EW	Shear (MN) @ base	90	90	0.0%
		Moment (MN-m) @ base	1463	1482	1.3%
	Vert.	Vertical acc (g) at top	0.52	0.52	0.0%
RCCV	NS	Shear (MN) @ base	261	263	0.8%
		Moment (MN-m) @ base	10238	10189	-0.5%
	EW	Shear (MN) @ base	224	225	0.4%
		Moment (MN-m) @ base	10925	10885	-0.4%
	Vert.	Vertical acc (g) at top	0.65	0.68	4.6%
RB/FB	NS	Shear (MN) @ base	934	939	0.5%
		Moment (MN-m) @ base	29920	29744	-0.6%
	EW	Shear (MN) @ base	737	742	0.7%
		Moment (MN-m) @ base	28420	28263	-0.6%
	Vert.	Vertical acc (g) at top	0.86	0.89	3.5%

Note *1) Non-flooded containment during normal operating condition (Tables 9.3-1, 9.3-2 and B-45 of Reference 2.1.2-o)

*2) Flooded containment after LOCA (Tables 9.5-1, 9.5-2 and B-53 of Reference 2.1.2-o)

**Table 5.3.3-2 Design Seismic Loads for Horizontal SSE (RB and FB Walls)**

Elev. (m)	Elem No.	Node No.	Shear		Moment		Calculated Torsion (MN-m)	Accidental Torsion (MN-m)	Design Torsion (MN-m)
			X-Dir. (MN)	Y-Dir. (MN)	X-Dir. (MN-m)	Y-Dir. (MN-m)			
52.40 ^{*1}	1110	110			2724	2143			
			192.2	140.0	5838	4488	1284	471	1755
34.00	1109	109			8196	5821			
			173.2	113.9	8719	6389	1938	424	2362
27.00	1108	108			9400	7162			
			396.0	259.4	9599	7958	2799	1386	4185
22.50	1107	107			11216	8328			
			436.4	291.8	11424	9227	4678	1527	6205
17.50	1106	106			12105	9408			
			438.4	343.5	12349	10195	4023	1535	5557
13.57	1105	105			12839	10255			
			450.7	363.7	13651	11216	4211	1578	5788
9.06	1104	104			13904	11338			
			454.6	383.4	15231	12506	4694	1591	6285
4.65	1103	103			9392	6302			
			454.7	360.1	10952	7759	5248	1591	6839
-1.00	1102	102			6545	4819			
			240.0	226.6	7303	5358	2718	840	3558
-6.40	1101	101			4748	3351			
-11.50		2	237.7	200.4	5053	3356	2079	832	2910

Note: RB/FB Seismic Analyses Bounding Results and In-Structure Response Spectra. (Table 4.1-1 of Reference 2.1.2-k)

The node numbers in this table are described in Figure 5.3.3-1.

*1: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.

**Table 5.3.3-3 Design Seismic Loads for Horizontal SSE (RCCV)**

Elev. (m)	Elem No.	Node No.	Shear		Moment		Calculated Torsion (MN-m)	Accidental Torsion (MN-m)	Design Torsion (MN-m)
			X-Dir. (MN)	Y-Dir. (MN)	X-Dir. (MN-m)	Y-Dir. (MN-m)			
34.00	1209	209			230	510			
			130.9	133.2	1029	1160	29	266	296
27.00	1208	208			2162	2303			
			141.1	151.9	2938	3071	1489	304	1793
17.50	1206	206			3259	3667			
			184.1	158.4	3691	3904	1591	368	1960
13.57	1205	205			3817	4203			
			207.9	173.4	4389	4491	1762	416	2178
9.06	1204	204			4481	4853			
			225.4	201.2	5190	5203	2062	451	2513
4.65	1203	203			5523	5470			
			109.2	125.7	5740	5824	1439	251	1691
-1.00	1202	202			6008	6066			
			67.6	68.1	5924	6035	690	136	826
-6.40	1201	201			6053	6141			
-11.50		2	70.7	55.1	5961	6127	349	141	490

Note: RB/FB Seismic Analyses Bounding Results and In-Structure Response Spectra. (Table 4.1-2 of Reference 2.1.2-k)

The node numbers in this table are described in Figure 5.3.3-1.

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 81

REV. 2

of 543

Table 5.3.3-4 Design Seismic Loads for Horizontal SSE (RPV Pedestal and Vent Wall)

Elev. (m)	Elem No.	Node No.	Shear		Moment		Calculated Torsion (MN-m)	Accidental Torsion (MN-m)	Design Torsion (MN-m)
			X-dir. (MN)	Y-dir. (MN)	X-dir. (MN-m)	Y-dir. (MN-m)			
17.5	701	701			107	62			
			47.9	32.4	139	107	107	40	147
14.5	702	702			139	113			
			47.1	32.4	279	204	108	39	148
11.5	703	703			280	207			
			45.8	35.1	411	301	111	38	149
8.5	704	704			411	302			
			44.7	36.5	458	338	112	37	149
7.4625	705	705			440	352			
			39.1	29.4	513	427	92	33	125
4.65	1303	706,303			667	496			
			20.5	16.9	651	502	71	16	87
2.4165	1377	377			793	614			
			32.1	31.4	754	631	86	26	112
-1.00	1302	302			691	571			
			22.1	15.7	658	555	34	18	52
-2.75	1376	376			658	555			
			21.8	16.1	594	524	34	17	52
-6.40	1301	301			555	518			
-11.50		2	29.8	22.4	553	514	21	24	45

Note: RB/FB Seismic Analyses Bounding Results and In-Structure Response Spectra. (Tables 4.1-3 and 4.1-4 of Reference 2.1.2-k)

The node numbers in this table are described in Figure 5.3.3-1.

**Table 5.3.3-5 Design Seismic Loads for Horizontal SSE (RSW)**

Elev. (m)	Elem No.	Node No.	Shear		Moment		Calculated Torsion (MN·m)	Accidental Torsion (MN·m)	Design Torsion (MN·m)
			X-dir. (MN)	Y-dir. (MN)	X-dir. (MN·m)	Y-dir. (MN·m)			
24.18	707	707			2.5	2.2			
			4.2	3.0	18.9	13.8	0.5	2.0	2.5
20.2	708	708			25.8	19.8			
			20.8	11.1	113.5	59.3	1.7	9.8	11.6
15.775	709	709			116.7	61.3			
			24.4	12.3	224.1	115.5	2.4	11.5	13.9
11.35	710	710			227.6	116.9			
			27.1	13.5	331.9	169.3	3.0	12.8	15.8
7.4625	711	711			135.4	125.5			
			26.6	22.2	169.6	151.7	22.9	12.6	35.5
4.65	712	712			156.8	142.3			
			14.3	13.5	147.3	132.8	15.2	6.7	21.9
2.4165	713	713			4.0	4.0			
1.96			1.6	1.6	3.3	3.3	0.2	0.7	0.9
1.96	714	714			3.0	3.0			
-0.8		715	0.9	0.9	0.7	0.6	0.1	0.4	0.5

Note: RB/FB Seismic Analyses Bounding Results and In-Structure Response Spectra. (Table 4.1-4 of Reference 2.1.2-k)

The node numbers in this table are described in Figure 5.3.3-1.

**Table 5.3.3-6 Design Seismic Loads for Horizontal SSE (RPV)**

Elev. (m)	Elem No.	Node No.	Axial (MN)	Shear		Moment	
				X-dir. (MN)	Y-dir. (MN)	X-dir. (MN-m)	Y-dir. (MN-m)
3.215	844	845	9.10	18.6	7.9	29.9	15.6
2.365		846				44.5	18.9
8.453	871	815	24.75	29.8	18.8	182.7	151.9
7.4625		711				176.6	147.4

Note: RB/FB Seismic Analyses Bounding Results and In-Structure Response Spectra. (Tables 4.1-5 and 4.1-6 of Reference 2.1.2-k)

The node numbers in this table are described in Figure 5.3.3-1.

**Table 5.3.3-7 Maximum Vertical Accelerations
(RB and FB)**

Elev. (m)	Node No.	Stick Model	Max. Vertical Acceleration (g)
52.4 ^{*1}	110	RBFB	1.56
34.00	109	RBFB	1.20
27.00	108	RBFB	1.02
22.50	107	RBFB	0.92
17.50	106	RBFB	0.80
13.57	105	RBFB	0.72
9.06	104	RBFB	0.62
4.65	103	RBFB	0.56
-1.00	102	RBFB	0.57
-6.40	101	RBFB	0.53
-11.50	2	RBFB	0.51
-15.50	1	RBFB	0.52

Note: RB/FB Seismic Analyses Bounding Results and In-Structure Response Spectra. (Table 4.2-1 of Reference 2.1.2-k)

The node numbers in this table are described in Figure 5.3.3-1.

*1: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.

Table 5.3.3-8 Maximum Vertical Accelerations (RCCV)

Elev. (m)	Node No.	Stick Model	Max. Vertical Acceleration (g)
34.00	209	RCCV	1.20
27.00	208	RCCV	1.12
17.50	206	RCCV	0.91
13.57	205	RCCV	0.82
9.06	204	RCCV	0.72
4.65	203	RCCV	0.65
-1.00	202	RCCV	0.58
-6.40	201	RCCV	0.55

Note: RB/FB Seismic Analyses Bounding Results and In-Structure Response Spectra. (Table 4.2-2 of Reference 2.1.2-k)

The node numbers in this table are described in Figure 5.3.3-1.

**Table 5.3.3-9 Maximum Vertical Accelerations (RPV Pedestal and Vent Wall)**

Elev. (m)	Node No.	Stick Model	Max. Vertical Acceleration (g)
17.50	701	VW	0.82
14.50	702	VW	0.86
11.50	703	VW	0.81
8.50	704	VW	0.72
7.4625	705	VW	0.67
4.65	706, 303	Pedestal	0.69
-1.00	302	Pedestal	0.59
-6.40	301	Pedestal	0.56

Note: RB/FB Seismic Analyses Bounding Results and In-Structure Response Spectra. (Tables 4.2-3 and 4.2-4 of Reference 2.1.2-k)

The node numbers in this table are described in Figure 5.3.3-1.

Table 5.3.3-10 Maximum Vertical Accelerations (RSW)

Elev. (m)	Node No.	Stick Model	Max. Vertical Acceleration (g)
24.18	707	RSW	1.30
20.20	708	RSW	1.23
15.775	709	RSW	0.99
11.35	710	RSW	0.78
7.4625	711	RSW	0.68
4.65	712	RSW	0.69
2.4615	713	RSW	0.64
1.96	714	RSW	0.64
-0.80	715	RSW	0.64

Note: RB/FB Seismic Analyses Bounding Results and In-Structure Response Spectra. (Table 4.2-4 of Reference 2.1.2-k)

The node numbers in this table are described in Figure 5.3.3-1.



Table 5.3.3-11 Enveloping Maximum Vertical Acceleration: RBFB Flexible Slab Oscillators

Elev. (m)	Node No.	Stick Model	Max. Vertical Acceleration (g)
52.4*	9101	Oscillator	0.33
	9102	Oscillator	1.33
	9103	Oscillator	6.27
	9104	Oscillator	2.62
	9105	Oscillator	2.42
	9106	Oscillator	3.74
	9107	Oscillator	3.22
	9108	Oscillator	2.50
	9109	Oscillator	1.53
34.00	9091	Oscillator	1.61
	9092	Oscillator	1.61
	9093	Oscillator	1.12
27.00	9081	Oscillator	1.64
	9082	Oscillator	1.52
	9083	Oscillator	1.30
	9084	Oscillator	1.67
	9085	Oscillator	1.46
	9086	Oscillator	1.12
	9087	Oscillator	1.03
22.50	9071	Oscillator	1.15
	9072	Oscillator	1.79
	9073	Oscillator	4.47
	9074	Oscillator	1.67
	9075	Oscillator	1.51
	9076	Oscillator	1.65
17.50	9061	Oscillator	3.65
	9062	Oscillator	2.62
	9063	Oscillator	1.17
	9064	Oscillator	2.56
	9065	Oscillator	1.28
	99064	Oscillator	0.99
	9066	Oscillator	1.09
	9067	Oscillator	0.91

Note: Bounding Equivalent Out-of-plane Acceleration Loads on Slabs are shown in RB/FB Seismic Analyses Bounding Results and In-Structure Response Spectra. (Table 4.2-1 of Reference 2.1.2-k)

*: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.



Table 5.3.3-11 Enveloping Maximum Vertical Acceleration: RBFB Flexible Slab Oscillators (Continued)

Elev. (m)	Node No.	Stick Model	Max. Vertical Acceleration (g)
13.57	9051	Oscillator	1.11
	9052	Oscillator	1.25
	9053	Oscillator	0.99
	9054	Oscillator	0.83
9.06	9041	Oscillator	1.02
	9042	Oscillator	1.26
	9043	Oscillator	0.93
	9044	Oscillator	0.80
4.65	9031	Oscillator	1.62
	9032	Oscillator	0.89
	9033	Oscillator	1.12
	9034	Oscillator	1.81
	9035	Oscillator	1.09
	9036	Oscillator	0.94
	9037	Oscillator	0.82
-1.00	9021	Oscillator	0.97
	9022	Oscillator	2.07
	9023	Oscillator	0.98
	9024	Oscillator	1.12
	9025	Oscillator	1.21
	9026	Oscillator	1.63
	9027	Oscillator	0.93
	9028	Oscillator	0.96
	9029	Oscillator	1.30
	9030	Oscillator	0.87
-6.40	9011	Oscillator	0.84
	9012	Oscillator	1.17
	9013	Oscillator	1.52
	9014	Oscillator	1.19
	9015	Oscillator	1.03

Note: Bounding Equivalent Out-of-plane Acceleration Loads on Slabs are shown in RB/FB Seismic Analyses Bounding Results and In-Structure Response Spectra. (Table 4.2-1 of Reference 2.1.2-k)

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 88

REV. 2

of 543

Table 5.3.3-12 Soil Pressure Due to an Earthquake

Elevation (m)	Soil Pressure (MPa)		Note
	R1 and F3 Wall	RA and RG Wall	
4.65			Grade
	0.56	0.45	
-1.00			
	0.28	0.29	
-6.40			
	0.24	0.22	
-11.50			
	0.94	0.76	
-15.50			

**Table 5.3.3-13 Seismic Hydrodynamic Loads for GDCS Pool**

Longitudinal Direction Motion				Transversal Direction Motion				Vertical Motion		
Wall		Floor		Wall		Floor		Wall		Floor
Depth d/H	Pressure (kN/m ²)	Distance x/(L/2)	Pressure (kN/m ²)	Depth d/H	Pressure (kN/m ²)	Distance x/(L/2)	Pressure (kN/m ²)	Depth d/H	Pressure (kN/m ²)	Pressure (kN/m ²)
0.0	9.7	0.0	0.0	0.0	9.8	0.0	0.0	0.0	0.0	68.0 for all floor area
0.2	21.0	0.2	6.1	0.2	15.6	0.2	4.3	0.2	13.6	
0.4	35.8	0.4	13.1	0.4	23.8	0.4	8.8	0.4	27.2	
0.6	46.6	0.6	22.2	0.6	26.1	0.6	13.7	0.6	40.8	
0.8	53.1	0.8	35.1	0.8	26.1	0.8	19.4	0.8	54.4	
1.0	55.3	1.0	55.3	1.0	26.1	1.0	26.1	1.0	68.0	

Notes: 1) "d" is depth from the top of water. "H" is water height of the pool (6.8 m).

2) "x" is distance from the center of the pool. "L" is width of the pool.

3) Floor pressure due to vertical motion is for reference only. It is already included in vertical seismic loads for the floor.

4) This load is applied on the RCCV wall. Seismic hydrodynamic loads on the GDCS internal structure wall are evaluated separately, taking into account flexibility of the wall.

Table 5.3.3-14 Seismic Hydrodynamic Loads for RPV Cavity / Dryer Separator / Fuel Buffer Pool

NS / EW Motion				Vertical Motion		
Wall		Floor		Wall		Floor
Depth d/H	Pressure (kN/m ²)	Distance x/(L/2)	Pressure (kN/m ²)	Depth d/H	Pressure (kN/m ²)	Pressure (kN/m ²)
0.0	15.2	0.0	0.0	0.0	0.0	76.2 for all floor area
0.2	23.1	0.2	8.0	0.2	15.2	
0.4	37.0	0.4	16.7	0.4	30.5	
0.6	47.8	0.6	27.0	0.6	45.7	
0.8	54.5	0.8	39.9	0.8	61.0	
1.0	56.7	1.0	56.7	1.0	76.2	

Notes: 1) "d" is depth from the top of water. "H" is water height of the pool (6.7 m).

2) "x" is distance from the center of the pool. "L" is width of the pool.

3) Floor pressure due to vertical motion is for reference only. It is already included in vertical seismic loads for the floor.

**Table 5.3.3-15 Seismic Hydrodynamic Loads for IC / PCCS Pool**

NS / EW Motion				Vertical Motion		
Wall		Floor		Wall		Floor
Depth d/H	Pressure (kN/m ²)	Distance x/(L/2)	Pressure (kN/m ²)	Depth d/H	Pressure (kN/m ²)	Pressure (kN/m ²)
0.0	9.1	0.0	0.0	0.0	0.0	54.6 for all floor area
0.2	13.6	0.2	4.6	0.2	10.9	
0.4	21.7	0.4	9.5	0.4	21.8	
0.6	26.7	0.6	14.8	0.6	32.8	
0.8	28.2	0.8	21.0	0.8	43.7	
1.0	28.2	1.0	28.2	1.0	54.6	

- Notes: 1) "d" is depth from the top of water. "H" is water height of the pool (4.8 m).
 2) "x" is distance from the center of the pool. "L" is width of the pool.
 3) Floor pressure due to vertical motion is for reference only. It is already included in vertical seismic loads for the floor.

Table 5.3.3-16 Seismic Hydrodynamic Loads for Extension Pool A

NS Motion				EW Motion				Vertical Motion		
Wall		Floor		Wall		Floor		Wall		Floor
Depth d/H	Pressure (kN/m ²)	Distance x/(L/2)	Pressure (kN/m ²)	Depth d/H	Pressure (kN/m ²)	Distance x/(L/2)	Pressure (kN/m ²)	Depth d/H	Pressure (kN/m ²)	Pressure (kN/m ²)
0.0	4.8	0.0	0.0	0.0	7.8	0.0	0.0	0.0	0.0	54.6 for all floor area
0.2	16.5	0.2	1.3	0.2	12.9	0.2	3.9	0.2	10.9	
0.4	28.6	0.4	2.7	0.4	20.3	0.4	8.1	0.4	21.8	
0.6	37.3	0.6	4.7	0.6	23.8	0.6	12.6	0.6	32.8	
0.8	42.5	0.8	12.3	0.8	24.0	0.8	17.8	0.8	43.7	
1.0	44.3	1.0	44.3	1.0	24.0	1.0	24.0	1.0	54.6	

- Notes: 1) "d" is depth from the top of water. "H" is water height of the pool (4.8 m).
 2) "x" is distance from the center of the pool. "L" is width of the pool.
 3) Floor pressure due to vertical motion is for reference only. It is already included in vertical seismic loads for the floor.

**Table 5.3.3-17 Seismic Hydrodynamic Loads for Extension Pool B**

NS Motion				EW Motion				Vertical Motion		
Wall		Floor		Wall		Floor		Wall		Floor
Depth d/H	Pressure (kN/m ²)	Distance x/(L/2)	Pressure (kN/m ²)	Depth d/H	Pressure (kN/m ²)	Distance x/(L/2)	Pressure (kN/m ²)	Depth d/H	Pressure (kN/m ²)	Pressure (kN/m ²)
0.0	7.8	0.0	0.0	0.0	13.7	0.0	0.0	0.0	0.0	54.6 for all floor area
0.2	12.5	0.2	3.5	0.2	18.2	0.2	5.5	0.2	10.9	
0.4	19.2	0.4	7.2	0.4	27.8	0.4	11.7	0.4	21.8	
0.6	21.5	0.6	11.3	0.6	35.5	0.6	19.1	0.6	32.8	
0.8	21.5	0.8	16.0	0.8	40.3	0.8	28.7	0.8	43.7	
1.0	21.5	1.0	21.5	1.0	41.9	1.0	41.9	1.0	54.6	

- Notes: 1) "d" is depth from the top of water. "H" is water height of the pool (4.8 m).
 2) "x" is distance from the center of the pool. "L" is width of the pool.
 3) Floor pressure due to vertical motion is for reference only. It is already included in vertical seismic loads for the floor.

Table 5.3.3-18 Seismic Hydrodynamic Loads for Spent Fuel Pool

NS Motion				EW Motion				Vertical Motion		
Wall		Floor		Wall		Floor		Wall		Floor
Depth d/H	Pressure (kN/m ²)	Distance x/(L/2)	Pressure (kN/m ²)	Depth d/H	Pressure (kN/m ²)	Distance x/(L/2)	Pressure (kN/m ²)	Depth d/H	Pressure (kN/m ²)	Pressure (kN/m ²)
0.0	12.3	0.0	0.0	0.0	11.8	0.0	0.0	0.0	0.0	98.5 for all floor area
0.2	23.6	0.2	7.4	0.2	24.2	0.2	8.5	0.2	19.7	
0.4	37.8	0.4	15.2	0.4	40.0	0.4	17.5	0.4	39.4	
0.6	44.6	0.6	23.7	0.6	49.4	0.6	27.4	0.6	59.1	
0.8	45.2	0.8	33.6	0.8	52.2	0.8	38.7	0.8	78.8	
1.0	45.2	1.0	45.2	1.0	52.2	1.0	52.2	1.0	98.5	

- Notes: 1) "d" is depth from the top of water. "H" is water height of the pool (14.35 m).
 2) "x" is distance from the center of the pool. "L" is width of the pool.
 3) Floor pressure due to vertical motion is for reference only. It is already included in vertical seismic loads for the floor.

**Table 5.3.3-19 RPV Reactions Due to SSE**

		Seismic
Vertical	(MN)	24.75
Shear	(MN)	29.8
Moment	(MNm)	182.7

Table 5.3.3-20 Enveloping Maximum Horizontal Acceleration: RBFB Wall Out-of-Plane Oscillators

Elev. (m)	Node No.	Stick Model	Max. Horizontal Acceleration (g)	Portion
42.00 (X-dir)	99981	Oscillator	2.71	R1 and R7 walls
	99982	Oscillator	1.54	
	99986	Oscillator	0.89	
42.00 (Y-dir)	99983	Oscillator	1.86	RB and RF walls
	99984	Oscillator	1.02	
	99985	Oscillator	1.00	
	99987	Oscillator	0.59	
30.50 (X-dir)	99991	Oscillator	0.58	R1 and R7 walls
30.50 (Y-dir)	99992	Oscillator	0.56	RB and RF walls
13.57 (X-dir)	99971	Oscillator	2.11	F3 walls
	99972	Oscillator	2.29	
	99973	Oscillator	1.88	
	99974	Oscillator	1.13	
	99977	Oscillator	0.89	
13.57 (Y-dir)	99975	Oscillator	2.16	FA and FF walls
	99976	Oscillator	0.93	
	99978	Oscillator	0.97	

Note: Bounding Equivalent Out-of-plane Acceleration Loads on Walls are shown in RB/FB Seismic Analyses Bounding Results and In-Structure Response Spectra. (Table 4.5-2 of Reference 2.1.2-k)

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 93

REV. 2

of 543

Table 6.2.2-1 List of GA Drawings Used for Modeling

Title	Drawing #	Revision
General Arrangement - ESBWR PLOT PLAN	105E3968 SH01	-
General Arrangement - ESBWR EL -11500	105E3908 SH01	5
General Arrangement - ESBWR EL -6400	105E3908 SH02	5
General Arrangement - ESBWR EL -1000	105E3908 SH03	5
General Arrangement - ESBWR EL 4650	105E3908 SH04	5
General Arrangement - ESBWR EL 9060	105E3908 SH05	5
General Arrangement - ESBWR EL 13570	105E3908 SH06	5
General Arrangement - ESBWR EL 17500	105E3908 SH07	5
General Arrangement - ESBWR EL 27000	105E3908 SH08	5
General Arrangement - ESBWR EL 34000	105E3908 SH09	5
General Arrangement - ESBWR SECTION "A-A"	105E3908 SH10	5
General Arrangement - ESBWR SECTION "B-B"	105E3908 SH11	5



Table 6.2.2-2 Structural Members Considered in Analyses and Their Design

Structural Members		Included in Global FE Model	Designed using Global FEM Analysis Results
Basemat		○	○
RCCV		○	○
Liner		○	○
Penetration Sleeve		○	
Pool*		○	○
Walls	Outer Seismic Walls	○	○
	Inner Seismic Walls	○	○
	Other Walls	RB Cylindrical Wall Walls around Pools	RB Cylindrical Wall Walls around Pools
Floor Slabs		○	○
Frames	Columns	○	○
	Girders	○	○
	RB Roof Main Trusses	○	○
	RB Roof Sub-trusses		
RCCV Internal Structures		○	○

Note*: Pool includes walls and slabs of the reactor cavity pool, the dryer/separator pool, the fuel buffer pool, IC/PCCS pool, and IC/PCCS expansion pool.

**Table 6.2.2-3 Type of Elements Used to Model Structural Members**

Structural Members	Element Type	Forces Considered
RCCV Basemat Pool Wall Slab	Thick Shell Element	Membrane Force In-plane Shear Force Bending Moment Transverse Shear Force
Liner	Membrane Element	Membrane Force In-Plane Shear Force
Column Girder Roof Truss	Bar Element	Axial Force Bending Moment Transverse Shear Force
Penetration Sleeve	Rod Element	Axial Force



HITACHI

WG3-U71-ERD-S-0004 SH NO. 96

REV. 2

of 543

Table 6.2.2-4 Local Coordinate Systems

Structure	z-direction
RCCV Wall RPV Pedestal External Wall	outward
Wall in N-S Direction	toward West
Wall in E-W Direction	toward South
Basemat Floor Slab Top Slab Suppression Pool Slab	downward

**Table 6.2.2-5 Soil Spring Constants for the RB Analysis Model**

Loads		Soil Spring Constants (MN/m/m ²)		
		Horizontal		Vertical
		NS-direction	EW-direction	
for All Loads except for Seismic Loads		9.107	9.654	13.66
for Seismic Loads	Horizontal	9.107	9.654	38.35
	Vertical, Torsion	9.107	9.654	13.66

Table 6.2.2-6 Levels of Floor Slabs Connected to the RCCV Wall

Story	Elevation	Item	t (mm)	Modeled Slab Level
5F	27000	Top Slab	2400	25800
4F	17500	DF Slab	600	17200
3F	13570	Slab around Containment	1000	13070
2F	9060	Slab around Containment	1000	8560
1F	4650	Suppression Pool Floor Slab	2000	3650
B1F	-1000	Slab around Containment	1000	-1500
B2F	-6400	Slab around Containment	1000	-6900
B3F	-11500	Basemat	4000	-13500



HITACHI

WG3-U71-ERD-S-0004 SH NO. 98


REV. 2

of 543

Table 6.2.2-7 Dimensions of Modeled Round Openings on RCCV

Portion	Opening	Diameter (m)	Angle* (°)	X* (m)	Elevation at Center (EL m)
RPV Pedestal	Lower Drywell Personnel Airlock	2.432	0	0.0	-5.350
	Lower Drywell Equipment Hatch	2.432	180	0.0	-5.600
RCCV	Wetwell Hatch	2.032	115	0.0	14.450
	Upper Drywell Personnel Airlock	2.432	52	0.0	19.505
	Upper Drywell Equipment Hatch	2.432	307	0.0	18.570
	Main Steam Lines	1.200	0	4.2	19.150
		1.200	0	1.4	19.150
		1.200	0	-1.4	19.150
		1.200	0	-4.2	19.150
	Feed Water Lines	0.965	0	6.3	20.349
		0.965	0	6.3	20.349

Note *: See figure below

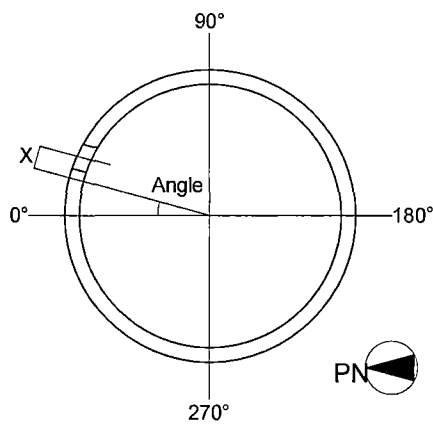

**Table 6.2.2-8 Material and Thickness of the RCCV Liner**

Portion	Material	Thickness (mm)
Drywell Cylinder	Carbon Steel	6.4
Wetwell Cylinder	Stainless Steel	6.4
Top Slab Flat Plate	Carbon Steel	6.4
Wetwell Floor Plate	Stainless Steel	16.0
Lower Drywell Bottom Plate	Carbon Steel	6.4

Table 6.2.2-9 Area of Rod Elements Used in Sleeve Models

Opening	Sleeve Thickness t (mm)	Concrete Thickness w (m)	Area of Rod Element $Ar = tw \text{ (m}^2\text{)}$
Top Head	50.0	2.4	0.120

Table 6.2.2-10 Dimensions of Modeled Rectangular Openings on RB Walls

Portion	Opening	Width (m)	height (m)	Position	
				NS	EW
Wall below RCCV		3.0	3.5	R6	RD~RE
Inner Wall		3.5	3.5	R7	FC~FD
Exterior Wall	Equipment Hatch Access Opening	3.0	3.0	R4~R5	RG
		3.0	3.0	R4~R5	RG
		7.5	6.0	R4~R5	RF



Table 6.2.2-11 Material Constants Used in Stress Analysis
(Reproduced from Reference 2.1.2-e)

			Reinforced Concrete			Steel			Note
			Basemat f'c=4000psi 27.6MPa	Others f'c=5000psi 34.5MPa	Top Slab f'c=6000psi 41.4MPa	Carbon Steel Liner	Stainless Steel Liner	Structural Steel	
		Temperature (°C)							
Young's Modulus (MPa)	Thermal Loads *2	<21	2.49x10 ⁴	2.78x10 ⁴	3.04x10 ⁴	2.00x10 ⁵			Concrete: See Notes 1 & 2.
		93	1.81x10 ⁴	2.03x10 ⁴	2.22x10 ⁴				
		204	1.62x10 ⁴	1.81x10 ⁴	1.98x10 ⁴				
	Other Loads*1		2.49x10 ⁴	2.78x10 ⁴	3.04x10 ⁴	2.00x10 ¹ *3		2.00x10 ⁵	
Poisson's Ratio			0.17			0.3			
Thermal Expansion (m/m°C)			9.90x10 ⁻⁶			1.17x10 ⁻⁵	1.52x10 ⁻⁵	1.17x10 ⁻⁵	
Weight Density (MN/m3)			0.0235			0.0770			

Notes *1: Young's modulus of concrete is calculated in accordance with ACI 349-01, Section 8.5.1.

$$E_c = 57,000\sqrt{f'_c}$$

*2: Reduction factors of Young's modulus for concrete are determined based upon the average values of the following upper bound and lower bound equations.

Lower bound:

$$\phi = 1.0 - 0.0038(T - 70) \quad 70^\circ F \leq T \leq 200^\circ F$$

$$= 0.50 - 0.0005(T - 200) \quad 200^\circ F \leq T$$

Upper bound:

$$\phi = 1.0 - 0.00031(T - 70) \quad 70^\circ F \leq T \leq 400^\circ F$$

$$= 0.90 - 0.00084(T - 400) \quad 400^\circ F \leq T$$

*3: Except for the local thickened portions of the liner where the diaphragm floor, vent wall and RPV support brackets are attached. The full value of the Young's modulus is considered for these thickened liners.

**Table 6.2.3.2-1 Floor Live Loads**

Elevation (m)	Area Load (kN/m ²)		Remarks
	RB	FB	
52.40 ^{*1}	2.9	-	RB Roof
34.00	4.8	-	Indoor Slab
	See Figure 6.2.3.2-1	-	Roof Slab
27.50	-	See Figure 6.2.3.2-1	FB Roof Slab of Penthouse
27.00	4.8 ^{*2}	-	
	2.9	-	Main Steam Tunnel Roof
22.50	-	2.9	
17.50	4.8	-	
	0.0	-	Main Steam Tunnel Floor
13.57	4.8	-	
9.06	4.8	-	
4.65	4.8	4.8 ^{*2}	
-1.00	4.8	4.8	
-6.40	4.8	4.8	
-11.50	4.8	4.8	

Note

*1: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.

*2: Live load at pool water area is zero.

**Table 6.2.3.3-1 Load Combinations for Design Pressure Loads**

			Drywell ^{*1}	Wetwell ^{*1}	IC/PCCS ^{*1}	Main Steam Tunnel ^{*1}	Note
		Label	PDW	PSC	PIC	PMS	
TEST	Max.	PTL1	0.3568	0.3568	-	-	
	Diff.	PTL2	0.3100	0.0325	-	-	Max. Differential Pressure 277.5kPa
Normal Operation		POL	0.0090	0.0090	0.0345	-	
LOCA	After 5 seconds	PL1	0.0000	0.0000	0.0483	-	Period-I
	After 6 minutes	PL2	0.2570	0.2410	0.0483	-	Period-II
	After 10 hours	PL3	0.3100	0.3100	0.0483	-	Period-IV
	After 72 hours	PL4	0.3100	0.3100	0.0483	-	Period-IV
HELB		PLMS	-	-	-	0.0760	HELB in MS Tunnel

Note: *1: Unit pressure load, 1.0 MPa, is applied to each space in stress analyses.



Table 6.2.3.4-1 Atmosphere Temperatures: Summer

Region		Index ^{*1}	Atmosphere Temperature (°C)				
			Normal Operation	LOCA			
				5 sec.	6 min.	10 hr.	72 hr.
RB Inside Containment	Drywell	DW	57.0	133.7	171.0	150.0	150.0
	GDCS Pool	GP	43.0	43.0	43.0	110.0	110.0
	Wetwell	WW	43.0	86.2	130.0	121.0	121.0
	Suppression Pool	SP	43.0	43.0	110.0	110.0	110.0
RB Outside Containment	RB Rooms Outside Containment	RM	40.0	40.0	40.0	40.0	40.0
	Reactor Cavity Pool	DP	43.0	43.0	43.0	43.0	43.0
	Dryer/Separator Storage Pool	DP	43.0	43.0	43.0	43.0	43.0
	Fuel Buffer Pool	DP	43.0	43.0	43.0	43.0	43.0
	IC/PCCS Pool	IP	43.0	43.0	70.0	110.0	110.0
	Expansion Pool	XP	43.0	43.0	67.8	110.0	110.0
	Mainsteam Tunnel	MT	57.0	57.0	57.0	57.0	57.0
FB	FB Rooms	RM	40.0	40.0	40.0	40.0	40.0
	Spent Fuel Pool ^{*2}	FP	48.9 (100.0)	48.9 (100.0)	48.9 (100.0)	48.9 (100.0)	48.9 (100.0)
Air		AT	46.1	46.1	46.1	46.1	46.1
Ground		GR	15.5	15.5	15.5	15.5	15.5

Note*1: DW: Drywell
 WW: Wetwell
 SP: Suppression Pool
 GP: GDCS Pool
 IP: IC/PCCS Pool
 XP: Expansion Pool
 RM: Room
 FP: Spent Fuel Pool
 DP: DS/Fuel Pool, Reactor Cavity
 MT: Main Steam Tunnel
 GR: Ground
 AT: Outer Air

Note*2: Temperature in parentheses indicates temperature at 72 hours after loss of FAPCS cooling function resulting from a DBA.



Table 6.2.3.4-2 Atmosphere Temperatures: Winter

Region		Index ^{*1}	Atmosphere Temperature (°C)				
			Normal Operation	LOCA			
				5 sec.	6 min.	10 hr.	72 hr.
RB Inside Containment	Drywell	DW	57.0	133.7	171.0	150.0	150.0
	GDCS Pool	GP	43.0	43.0	43.0	110.0	110.0
	Wetwell	WW	43.0	86.2	130.0	121.0	121.0
	Suppression Pool	SP	43.0	43.0	110.0	110.0	110.0
RB Outside Containment	RB Rooms Outside Containment	RM	10.0	10.0	10.0	10.0	10.0
	Reactor Cavity Pool	DP	43.0	43.0	43.0	43.0	43.0
	Dryer/Separator Storage Pool	DP	43.0	43.0	43.0	43.0	43.0
	Fuel Buffer Pool	DP	43.0	43.0	43.0	43.0	43.0
	IC/PCCS Pool	IP	43.0	43.0	70.0	110.0	110.0
	Expansion Pool	XP	43.0	43.0	67.8	110.0	110.0
	Mainsteam Tunnel	MT	57.0	57.0	57.0	57.0	57.0
FB	FB Rooms	RM	10.0	10.0	10.0	10.0	10.0
	Spent Fuel Pool ^{*2}	FP	48.9 (100.0)	48.9 (100.0)	48.9 (100.0)	48.9 (100.0)	48.9 (100.0)
Air		AT	-40.0	-40.0	-40.0	-40.0	-40.0
Ground		GR	15.5	15.5	15.5	15.5	15.5

Note*1: DW: Drywell
 WW: Wetwell
 SP: Suppression Pool
 GP: GDCS Pool
 IP: IC/PCCS Pool
 XP: Expansion Pool
 RM: Room
 FP: Spent Fuel Pool
 DP: DS/Fuel Pool, Reactor Cavity
 MT: Main Steam Tunnel
 GR: Ground
 AT: Outer Air

Note*2: Temperature in parentheses indicates temperature at 72 hours after loss of FAPCS cooling function resulting from a DBA.



Table 6.2.3.4-3 Application of Thermal Loads: List of Indexes

Portion	Location	Index			Note
		RCCV	RB	FB	
RCCV	Shell	*	-	-	Figure 6.2.3.4-1~4
		RP1	-	-	
	RPV Pedestal	RP2	-	-	During LOCA Flooding
	Basemat	*	*	*	Figure 6.2.3.4-12~13
	Suppression Pool Slab	*	-	-	Figure 6.2.3.4-14
	Top Slab	*	-	-	Figure 6.2.3.4-16
External Wall	Column Line RA/FA	-	*	*	Figure 6.2.3.4-5
	Column Line RB	-	*	-	Figure 6.2.3.4-7
	Column Line RF	-	*	-	Figure 6.2.3.4-8
	Column Line RG/FF	-	*	*	Figure 6.2.3.4-6
	Column Line R1	-	*	-	Figure 6.2.3.4-9
	Column Line R7/F1	-	*	*	Figure 6.2.3.4-10
	Column Line F3	-	-	*	Figure 6.2.3.4-11
Slab	EL -6400	-	SL1	SL1	
	EL -1000	-	SL1	SL1	
	EL 4650	-	*	*	Figure 6.2.3.4-13
	EL 9060	-	SL1	-	
	EL 13570	-	SL1	-	
	EL 17500	-	*	-	Figure 6.2.3.4-15
	EL 22500	-	-	SL1	
	EL 27000	-	*	-	Figure 6.2.3.4-16
	EL 34000	-	*	-	Figure 6.2.3.4-17
	EL 52400 ^{*1}	-	SL7	-	


Note *: See Figures as noted in this Table.

*1: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.




Table 6.2.3.4-3 Application of Thermal Loads: List of Indexes (Continued)

Portion	Location	Index			Note
		RCCV	RB	FB	
Inner Wall	Wall1 around Spent Fuel Pool	-	-	-	Figure 6.2.3.4-18
	Wall2 around Spent Fuel Pool	-	-	-	Figure 6.2.3.4-19
	Wall3 around Spent Fuel Pool	-	-	-	Figure 6.2.3.4-20
	Wall1 around IC/PCCS Pool	-	*	-	Figure 6.2.3.4-23~24
	Wall2 around IC/PCCS Pool	-	PW3	-	
	Wall3 around IC/PCCS Pool	-	PW2	-	
	Wall4 around IC/PCCS Pool	-	PW5	-	
	Wall5 around IC/PCCS Pool	-	*	-	Figure 6.2.3.4-25
	Wall6 around IC/PCCS Pool	-	*	-	Figure 6.2.3.4-26
	Wall7 around IC/PCCS Pool	-	PW10	-	
	Other	-	IW1	IW1	
Pool Girder		-	*	-	Figure 6.2.3.4-22
Reactor Cavity Wall		-	PW1	-	
Main Steam Tunnel		-	*	-	Figure 6.2.3.4-15 Figure 6.2.3.4-16 Figure 6.2.3.4-21
Liner	Shell	*	-	-	Figure 6.2.3.4-27~30
	RPV Pedestal	RPL1	-	-	
	Basemat	MTL1	-	-	
	Suppression Pool Slab	CVL2	-	-	
	Top Slab	CVL4	-	-	

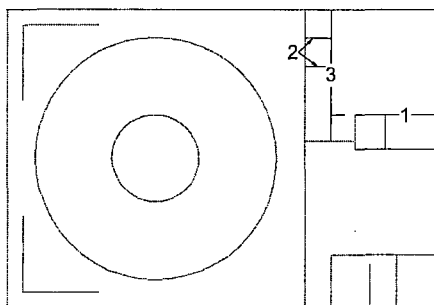

Spent Fuel Pool Walls



IC/PCCS Pool and Expansion Pool Walls

Note *: See Figures as noted in this Table.

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 107

REV. 2

of 543

**Table 6.2.3.4-4 Thermal Loads for Shell Elements,
Normal Operation: Summer**

Location	Index*	Boundary**		Thickness (mm)	Td (°C)	Tg (°C)	Note
		1	2				
Basemat	BM1	RM	GR	4000	27.07	23.15	General
	BM2	DW	GR	5100	27.47	23.94	Below lower Drywell
	BM4	DW	FL	5100	-	-	At LOCA Flooding
	BM6	FP	GR	5500	32.20	33.40	Below Spent Fuel Pool
	BM7	FP	GR	4000	32.20	33.40	Skimmer Surge Tank
RCCV Wall	CV1	RM	RM	2000	40.00	0.00	Below Grade
	CV2	SP	RM	2000	41.66	2.68	Suppression Pool
	CV3	VW	RM	2000	41.50	2.43	Wetwell Air Space
	CV4	DW	RM	2000	48.50	13.77	Drywell General
	CV5	GP	RM	2000	41.66	2.69	Drywell GDCS Pool
	CV6	DW	MT	2000	57.00	0.00	Drywell MS Tunnel
Suppression Pool Slab	SP1	SP	RM	2000	41.66	2.68	
Top Slab	TS1	DW	DP	2400	49.38	12.75	Below DSP/FP
	TS2	DW	IP	2400	49.38	12.75	Below IC/PCCS
	TS3	DW	XP	2400	49.38	12.75	Below Expansion Pool
	TS4	DW	DP	2400	50.81	12.61	Around Drywell Head
	TS5	DW	RM	2400	48.50	14.23	Below Room
RPV Pedestal	RP1	DW	RM	2400	48.50	14.23	
	RP2	FL	RM	2400	-	-	At LOCA Flooding
Pool Girder	PG1	IP	DP	1600	43.00	0.00	
	PG2	XP	DP	1600	43.00	0.00	
	PG3	DP	RM	1600	41.69	2.62	
Pool Gate Wall IC/PCCS Pool Wall Expansion Pool Wall	PW1	DP	DP	1300	43.00	0.00	
	PW2	IP	IP	400	43.00	0.00	
	PW4	IP	XP	600	43.00	0.00	
	PW6	XP	XP	1000	43.00	0.00	
	PW7	XP	XP	2000	43.00	0.00	
	PW8	XP	RM	1000	41.78	2.43	
	PW9	XP	RM	2000	41.66	2.68	
	PW10	RM	RM	1000	40.00	0.00	
	PW11	RM	RM	2000	40.00	0.00	
	PW12	IP	XP	1000	43.00	0.00	
	PW13	IP	RM	1000	41.79	2.42	
	PW14	IP	XP	470	43.00	0.00	
Spent Fuel Pool Wall***	FP7	FP	RM	1500	45.05	7.70	
	FP8	FP	RM	1900	44.94	7.92	
	FP9	FP	RM	1750	44.97	7.85	Around Skimmer Surge Tank
	FP10	FP	RM	2000	44.91	-7.96	
	FP11	FP	FP	1900	48.90	0.00	
	FP12	FP	FP	1750	48.90	0.00	Between Skimmer Surge Tanks

Note *: See Figures 6.2.3.4-1 through 6.2.3.4-30.

**: See footnotes in Table 6.2.3.4-1.

***: The spent fuel pool is normal condition.



**Table 6.2.3.4-4 Thermal Loads for Shell Elements,
Normal Operation: Summer (Continued)**

Location	Index*	Boundary**		Thickness (mm)	Td (°C)	Tg (°C)	Note
		1	2				
Outer Wall	BW1	RM	GR	2000	26.47	21.94	Below Grade General
	BW4	RM	RM	2000	40.00	0.00	Below Grade Stair Case
	BW5	FP	GR	2000	32.19	33.39	Below Grade Spent Fuel Pool
	BW6	FP	GR	3600	32.20	33.39	
	GW1	RM	AT	1500	43.37	-5.14	EL 4650 ~ 27000 General
	GW2	RM	RM	1500	40.00	0.00	EL 4650 ~ 27000 Stair Case
	GW3	XP	AT	1000	44.48	-2.96	EL 27000 ~ IC/PCCS Pool
	GW5	DP	AT	3000	44.52	-3.04	
	GW6	DP	AT	3500	44.53	-3.06	
	GW7	XP	AT	1500	44.50	-3.01	
	GW8	XP	RM	1000	41.78	2.43	EL 27000 ~ Stair Case/Pool
	GW9	RM	AT	1000	43.49	-4.77	EL 27000 ~ Room
	GW10	RM	RM	1000	40.00	0.00	EL 27000 ~ Stair Case
	GW11	DP	AT	1500	44.53	-3.05	
MS Tunnel	MT1	MT	RM	1300	48.50	12.51	Wall inside Building
	MT2	MT	AT	1300	50.91	8.97	Wall outside Building
	MT4	MT	RM	1600	48.50	13.16	Slab inside Building
	MT5	MT	DP	2400	49.38	12.76	
	MT6	XP	MT	2400	49.38	-12.75	
	MT7	MT	AT	1600	51.01	9.28	Slab outside Building
	MT8	MT	AT	2400	51.17	9.76	
	MT9	MT	RM	2400	48.50	14.23	
Inner Wall	IW1	RM	RM	-	40.00	0.00	General
Slab	SL1	RM	RM	-	40.00	0.00	General
	SL2	IP	RM	1000	41.50	2.04	Below & above IC/PCCS Pool
	SL3	XP	RM	1000	41.50	2.04	
	SL4	DP	RM	1000	41.78	2.43	
	SL5	RM	AT	1000	43.49	-4.77	RB Roof at EL 34000
	SL6	XP	AT	1000	44.48	-2.96	
	SL7	RM	AT	700	43.63	-4.36	RB Roof at EL 57400
	SL8	RM	AT	700	43.63	-4.36	FB Roof at EL 22500
RCCV Liner	CVL2	-	-	-	43.00	0.00	Suppression Pool
	CVL3	-	-	-	43.00	0.00	Wetwell Air Space
	CVL4	-	-	-	57.00	0.00	Drywell General
	CVL5	-	-	-	43.00	0.00	Drywell GDCS Pool
RPV Pedestal & Basemat Liner	RPL1	-	-	-	57.00	0.00	
	RPL2	-	-	-	-	-	At LOCA Flooding
MAT Liner	MTL1	-	-	-	46.02	0.00	Lower Drywell

Note *: See Figures 6.2.3.4-1 through 6.2.3.4-30.

**: See footnotes in Table 6.2.3.4-1.



**Table 6.2.3.4-5 Thermal Loads for Shell Elements,
LOCA After 5 seconds: Summer**

Location	Index*	Boundary**		Thickness (mm)	Td (°C)	Tg (°C)	Note
		1	2				
Basemat	BM1	RM	GR	4000	27.07	23.15	General
	BM2	DW	GR	5100	27.47	23.94	Below lower Drywell
	BM4	DW	FL	5100	27.47	23.94	At LOCA Flooding
	BM6	FP	GR	5500	32.20	33.40	Below Spent Fuel Pool
	BM7	FP	GR	4000	32.20	33.40	Skimmer Surge Tank
RCCV Wall	CV1	RM	RM	2000	40.00	0.00	Below Grade
	CV2	SP	RM	2000	41.66	2.69	Suppression Pool
	CV3	WW	RM	2000	41.61	3.06	Wetwell Air Space
	CV4	DW	RM	2000	48.84	15.79	Drywell General
	CV5	GP	RM	2000	41.66	2.69	Drywell GDCS Pool
	CV6	DW	MT	2000	57.33	1.97	Drywell MS Tunnel
Suppression Pool Slab	SP1	SP	RM	2000	41.66	2.68	
Top Slab	TS1	DW	DP	2400	49.72	14.76	Below DSP/FP
	TS2	DW	IP	2400	49.72	14.76	Below IC/PCCS
	TS3	DW	XP	2400	49.72	14.76	Below Expansion Pool
	TS4	DW	DP	2400	51.23	15.08	Around Drywell Head
	TS5	DW	RM	2400	48.84	16.23	Below Room
RPV Pedestal	RP1	DW	RM	2400	48.84	16.23	
	RP2	FL	RM	2400	48.94	16.83	At LOCA Flooding
Pool Girder	PG1	IP	DP	1600	43.00	0.00	
	PG2	XP	DP	1600	43.00	0.00	
	PG3	DP	RM	1600	41.69	2.62	
Pool Gate Wall IC/PCCS Pool Wall Expansion Pool Wall	PW1	DP	DP	1300	43.00	0.00	
	PW2	IP	IP	400	43.00	0.00	
	PW4	IP	XP	600	43.00	0.00	
	PW6	XP	XP	1000	43.00	0.00	
	PW7	XP	XP	2000	43.00	0.00	
	PW8	XP	RM	1000	41.78	2.43	
	PW9	XP	RM	2000	41.66	2.69	
	PW10	RM	RM	1000	40.00	0.00	
	PW11	RM	RM	2000	40.00	0.00	
	PW12	IP	XP	1000	43.00	0.00	
	PW13	IP	RM	1000	41.79	2.42	
	PW14	IP	XP	470	43.00	0.00	
Spent Fuel Pool Wall***	FP7	FP	RM	1500	45.05	7.70	
	FP8	FP	RM	1900	44.94	7.92	
	FP9	FP	RM	1750	44.97	7.85	Around Skimmer Surge Tank
	FP10	FP	RM	2000	44.91	-7.96	
	FP11	FP	FP	1900	48.90	0.00	
	FP12	FP	FP	1750	48.90	0.00	Between Skimmer Surge Tanks

Note *: See Figures 6.2.3.4-1 through 6.2.3.4-30.

**: See footnotes in Table 6.2.3.4-1.

***: The spent fuel pool is normal condition.

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 110

REV. 2

of 543

**Table 6.2.3.4-5 Thermal Loads for Shell Elements,
LOCA After 5 seconds: Summer (Continued)**

Location	Index*	Boundary**		Thickness (mm)	Td (°C)	Tg (°C)	Note
		1	2				
Outer Wall	BW1	RM	GR	2000	26.47	21.94	Below Grade General
	BW4	RM	RM	2000	40.00	0.00	Below Grade Stair Case
	BW5	FP	GR	2000	32.19	33.39	Below Grade Spent Fuel Pool
	BW6	FP	GR	3600	32.20	33.39	
	GW1	RM	AT	1500	43.37	-5.14	EL 4650 ~ 27000 General
	GW2	RM	RM	1500	40.00	0.00	EL 4650 ~ 27000 Stair Case
	GW3	XP	AT	1000	44.48	-2.96	EL 27000 ~ IC/PCCS Pool
	GW5	DP	AT	3000	44.52	-3.04	
	GW6	DP	AT	3500	44.53	-3.06	
	GW7	XP	AT	1500	44.50	-3.01	
	GW8	XP	RM	1000	41.78	2.43	EL 27000 ~ Stair Case/Pool
	GW9	RM	AT	1000	43.49	-4.77	EL 27000 ~ Room
MS Tunnel	GW10	RM	RM	1000	40.00	0.00	EL 27000 ~ Stair Case
	GW11	DP	AT	1500	44.53	-3.05	
	MT1	MT	RM	1300	48.50	12.51	Wall inside Building
	MT2	MT	AT	1300	50.91	8.97	Wall outside Building
	MT4	MT	RM	1600	48.50	13.16	Slab inside Building
	MT5	MT	DP	2400	49.38	12.76	
	MT6	XP	MT	2400	49.38	-12.75	
	MT7	MT	AT	1600	51.01	9.28	Slab outside Building
	MT8	MT	AT	2400	51.17	9.76	
Inner Wall	MT9	MT	RM	2400	48.50	14.23	
	IW1	RM	RM	-	40.00	0.00	General
Slab	SL1	RM	RM	-	40.00	0.00	General
	SL2	IP	RM	1000	41.50	2.05	Below & above IC/PCCS Pool
	SL3	XP	RM	1000	41.50	2.05	
	SL4	DP	RM	1000	41.78	2.43	
	SL5	RM	AT	1000	43.49	-4.77	RB Roof at EL 34000
	SL6	XP	AT	1000	44.48	-2.96	
	SL7	RM	AT	700	43.63	-4.36	RB Roof at EL 57400
	SL8	RM	AT	700	43.63	-4.36	FB Roof at EL 22500
RCCV Liner	CVL2	-	-	-	43.00	0.00	Suppression Pool
	CVL3	-	-	-	86.20	0.00	Wetwell Air Space
	CVL4	-	-	-	133.67	0.00	Drywell General
	CVL5	-	-	-	43.00	0.00	Drywell GDCS Pool
RPV Pedestal & Basemat Liner	RPL1	-	-	-	133.67	0.00	
	RPL2	-	-	-	145.00	0.00	At LOCA Flooding
MAT Liner	MTL1	-	-	-	46.02	0.00	Lower Drywell

Note *: See Figures 6.2.3.4-1 through 6.2.3.4-30.

**: See footnotes in Table 6.2.3.4-1.



**Table 6.2.3.4-6 Thermal Loads for Shell Elements,
LOCA After 6 minutes: Summer**

Location	Index*	Boundary**		Thickness (mm)	Td (°C)	Tg (°C)	Note
		1	2				
Basemat	BM1	RM	GR	4000	27.07	23.15	General
	BM2	DW	GR	5100	27.47	23.94	Below lower Drywell
	BM4	DW	FL	5100	27.47	23.94	At LOCA Flooding
	BM6	FP	GR	5500	32.20	33.40	Below Spent Fuel Pool
	BM7	FP	GR	4000	32.20	33.40	Skimmer Surge Tank
RCCV Wall	CV1	RM	RM	2000	40.00	0.00	Below Grade
	CV2	SP	RM	2000	42.20	5.89	Suppression Pool
	CV3	WW	RM	2000	42.36	7.49	Wetwell Air Space
	CV4	DW	RM	2000	49.67	20.71	Drywell General
	CV5	GP	RM	2000	41.66	2.69	Drywell GDCS Pool
	CV6	DW	MT	2000	58.16	6.84	Drywell MS Tunnel
Suppression Pool Slab	SP1	SP	RM	2000	42.14	5.53	
Top Slab	TS1	DW	DP	2400	50.40	18.79	Below DSP/FP
	TS2	DW	IP	2400	50.59	17.62	Below IC/PCCS
	TS3	DW	XP	2400	50.58	17.72	Below Expansion Pool
	TS4	DW	DP	2400	53.41	18.97	Around Drywell Head
	TS5	DW	RM	2400	49.52	20.25	Below Room
RPV Pedestal	RP1	DW	RM	2400	49.52	20.25	
	RP2	FL	RM	2400	49.29	18.91	At LOCA Flooding
Pool Girder	PG1	IP	DP	1600	43.26	1.52	
	PG2	XP	DP	1600	43.24	1.40	
	PG3	DP	RM	1600	41.69	2.62	
Pool Gate Wall IC/PCCS Pool Wall Expansion Pool Wall	PW1	DP	DP	1300	43.00	0.00	
	PW2	IP	IP	400	44.89	0.00	
	PW4	IP	XP	600	44.21	0.30	
	PW6	XP	XP	1000	43.71	0.00	
	PW7	XP	XP	2000	43.40	0.00	
	PW8	XP	RM	1000	42.14	4.49	
	PW9	XP	RM	2000	41.86	3.87	
	PW10	RM	RM	1000	40.00	0.00	
	PW11	RM	RM	2000	40.00	0.00	
	PW12	IP	XP	1000	43.74	0.19	
	PW13	IP	RM	1000	42.17	4.69	
	PW14	IP	XP	470	44.54	0.38	
Spent Fuel Pool Wall***	FP7	FP	RM	1500	45.05	7.70	
	FP8	FP	RM	1900	44.94	7.92	
	FP9	FP	RM	1750	44.97	7.85	Around Skimmer Surge Tank
	FP10	FP	RM	2000	44.91	-7.96	
	FP11	FP	FP	1900	48.90	0.00	
	FP12	FP	FP	1750	48.90	0.00	Between Skimmer Surge Tanks

Note *: See Figures 6.2.3.4-1 through 6.2.3.4-30.

**: See footnotes in Table 6.2.3.4-1.

***: The spent fuel pool is normal condition.



**Table 6.2.3.4-6 Thermal Loads for Shell Elements,
LOCA After 6 minutes: Summer (Continued)**

Location	Index*	Boundary**		Thickness (mm)	Td (°C)	Tg (°C)	Note
		1	2				
Outer Wall	BW1	RM	GR	2000	26.47	21.94	Below Grade General
	BW4	RM	RM	2000	40.00	0.00	Below Grade Stair Case
	BW5	FP	GR	2000	32.19	33.39	Below Grade Spent Fuel Pool
	BW6	FP	GR	3600	32.20	33.39	
	GW1	RM	AT	1500	43.37	-5.14	EL 4650 ~ 27000 General
	GW2	RM	RM	1500	40.00	0.00	EL 4650 ~ 27000 Stair Case
	GW3	XP	AT	1000	44.83	-0.90	EL 27000 ~ IC/PCCS Pool
	GW5	DP	AT	3000	44.52	-3.04	
	GW6	DP	AT	3500	44.53	-3.06	
	GW7	XP	AT	1500	44.75	-1.54	
	GW8	XP	RM	1000	42.14	4.49	EL 27000 ~ Stair Case/Pool
	GW9	RM	AT	1000	43.49	-4.77	EL 27000 ~ Room
	GW10	RM	RM	1000	40.00	0.00	EL 27000 ~ Stair Case
	GW11	DP	AT	1500	44.53	-3.05	
MS Tunnel	MT1	MT	RM	1300	48.50	12.51	Wall inside Building
	MT2	MT	AT	1300	50.91	8.97	Wall outside Building
	MT4	MT	RM	1600	48.50	13.16	Slab inside Building
	MT5	MT	DP	2400	49.38	12.76	
	MT6	XP	MT	2400	49.56	-11.69	
	MT7	MT	AT	1600	51.01	9.28	Slab outside Building
	MT8	MT	AT	2400	51.17	9.76	
	MT9	MT	RM	2400	48.50	14.23	
Inner Wall	IW1	RM	RM	-	40.00	0.00	General
Slab	SL1	RM	RM	-	40.00	0.00	General
	SL2	IP	RM	1000	41.89	4.34	Below & above IC/PCCS Pool
	SL3	XP	RM	1000	41.86	4.15	
	SL4	DP	RM	1000	41.78	2.43	
	SL5	RM	AT	1000	43.49	-4.77	RB Roof at EL 34000
	SL6	XP	AT	1000	44.83	-0.90	
	SL7	RM	AT	700	43.63	-4.36	RB Roof at EL 57400
	SL8	RM	AT	700	43.63	-4.36	FB Roof at EL 22500
RCCV Liner	CVL2	-	-	-	110.00	0.00	Suppression Pool
	CVL3	-	-	-	130.00	0.00	Wetwell Air Space
	CVL4	-	-	-	171.00	0.00	Drywell General
	CVL5	-	-	-	43.00	0.00	Drywell GDCS Pool
RPV Pedestal & Basemat Liner	RPL1	-	-	-	171.00	0.00	
	RPL2	-	-	-	145.00	0.00	At LOCA Flooding
MAT Liner	MTL1	-	-	-	46.02	0.00	Lower Drywell

Note *: See Figures 6.2.3.4-1 through 6.2.3.4-30.

**: See footnotes in Table 6.2.3.4-1.



**Table 6.2.3.4-7 Thermal Loads for Shell Elements,
LOCA After 10 hours: Summer**

Location	Index*	Boundary**		Thickness (mm)	Td (°C)	Tg (°C)	Note
		1	2				
Basemat	BM1	RM	GR	4000	27.07	23.15	General
	BM2	DW	GR	5100	27.47	23.94	Below lower Drywell
	BM4	DW	FL	5100	27.47	23.94	At LOCA Flooding
	BM6	FP	GR	5500	32.20	33.40	Below Spent Fuel Pool
	BM7	FP	GR	4000	32.20	33.40	Skimmer Surge Tank
RCCV Wall	CV1	RM	RM	2000	40.00	0.00	Below Grade
	CV2	SP	RM	2000	47.95	34.85	Suppression Pool
	CV3	WW	RM	2000	48.87	40.09	Wetwell Air Space
	CV4	DW	RM	2000	57.44	59.43	Drywell General
	CV5	GP	RM	2000	47.85	34.44	Drywell GDCS Pool
	CV6	DW	MT	2000	65.78	44.88	Drywell MS Tunnel
Suppression Pool Slab	SP1	SP	RM	2000	47.94	34.81	
Top Slab	TS1	DW	DP	2400	56.81	51.83	Below DSP/FP
	TS2	DW	IP	2400	61.94	24.80	Below IC/PCCS
	TS3	DW	XP	2400	61.85	25.20	Below Expansion Pool
	TS4	DW	DP	2400	68.65	48.56	Around Drywell Head
	TS5	DW	RM	2400	55.93	53.28	Below Room
RPV Pedestal	RP1	DW	RM	2400	55.93	53.28	
	RP2	FL	RM	2400	55.52	51.16	At LOCA Flooding
Pool Girder	PG1	IP	DP	1600	50.70	37.81	
	PG2	XP	DP	1600	50.57	37.30	
	PG3	DP	RM	1600	41.69	2.62	
Pool Gate Wall IC/PCCS Pool Wall Expansion Pool Wall	PW1	DP	DP	1300	43.00	0.00	
	PW2	IP	IP	400	100.11	0.00	
	PW4	IP	XP	600	83.87	0.33	
	PW6	XP	XP	1000	67.33	0.00	
	PW7	XP	XP	2000	55.10	0.00	
	PW8	XP	RM	1000	53.88	54.26	
	PW9	XP	RM	2000	47.69	33.72	
	PW10	RM	RM	1000	40.00	0.00	
	PW11	RM	RM	2000	40.00	0.00	
	PW12	IP	XP	1000	67.53	0.58	
	PW13	IP	RM	1000	54.15	55.02	
	PW14	IP	XP	470	93.68	0.12	
Spent Fuel Pool Wall***	FP7	FP	RM	1500	45.05	7.70	
	FP8	FP	RM	1900	44.94	7.92	
	FP9	FP	RM	1750	44.97	7.85	Around Skimmer Surge Tank
	FP10	FP	RM	2000	44.91	-7.96	
	FP11	FP	FP	1900	48.90	0.00	
	FP12	FP	FP	1750	48.90	0.00	Between Skimmer Surge Tanks

Note *: See Figures 6.2.3.4-1 through 6.2.3.4-30.

**: See footnotes in Table 6.2.3.4-1.

***: The spent fuel pool is normal condition.



**Table 6.2.3.4-7 Thermal Loads for Shell Elements,
LOCA After 10 hours: Summer (Continued)**

Location	Index*	Boundary**		Thickness (mm)	Td (°C)	Tg (°C)	Note
		1	2				
Outer Wall	BW1	RM	GR	2000	26.47	21.94	Below Grade General
	BW4	RM	RM	2000	40.00	0.00	Below Grade Stair Case
	BW5	FP	GR	2000	32.19	33.39	Below Grade Spent Fuel Pool
	BW6	FP	GR	3600	32.20	33.39	
	GW1	RM	AT	1500	43.37	-5.14	EL 4650 ~ 27000 General
	GW2	RM	RM	1500	40.00	0.00	EL 4650 ~ 27000 Stair Case
	GW3	XP	AT	1000	56.57	48.87	EL 27000 ~ IC/PCCS Pool
	GW5	DP	AT	3000	44.52	-3.04	
	GW6	DP	AT	3500	44.53	-3.06	
	GW7	XP	AT	1500	52.55	36.10	
	GW8	XP	RM	1000	53.88	54.26	EL 27000 ~ Stair Case/Pool
	GW9	RM	AT	1000	43.49	-4.77	EL 27000 ~ Room
	GW10	RM	RM	1000	40.00	0.00	EL 27000 ~ Stair Case
	GW11	DP	AT	1500	44.53	-3.05	
MS Tunnel	MT1	MT	RM	1300	48.50	12.51	Wall inside Building
	MT2	MT	AT	1300	50.91	8.97	Wall outside Building
	MT4	MT	RM	1600	48.50	13.16	Slab inside Building
	MT5	MT	DP	2400	49.38	12.76	
	MT6	XP	MT	2400	54.41	13.82	
	MT7	MT	AT	1600	51.01	9.28	Slab outside Building
	MT8	MT	AT	2400	51.17	9.76	
	MT9	MT	RM	2400	48.50	14.23	
Inner Wall	IW1	RM	RM	-	40.00	0.00	General
Slab	SL1	RM	RM	-	40.00	0.00	General
	SL2	IP	RM	1000	53.88	54.83	Below & above IC/PCCS Pool
	SL3	XP	RM	1000	53.68	54.25	
	SL4	DP	RM	1000	41.78	2.43	
	SL5	RM	AT	1000	43.49	-4.77	RB Roof at EL 34000
	SL6	XP	AT	1000	56.57	48.87	
	SL7	RM	AT	700	43.63	-4.36	RB Roof at EL 57400
	SL8	RM	AT	700	43.63	-4.36	FB Roof at EL 22500
RCCV Liner	CVL2	-	-	-	110.00	0.00	Suppression Pool
	CVL3	-	-	-	121.00	0.00	Wetwell Air Space
	CVL4	-	-	-	150.00	0.00	Drywell General
	CVL5	-	-	-	110.00	0.00	Drywell GDCS Pool
RPV Pedestal & Basemat Liner	RPL1	-	-	-	150.00	0.00	
	RPL2	-	-	-	145.00	0.00	At LOCA Flooding
MAT Liner	MTL1	-	-	-	46.02	0.00	Lower Drywell

Note *: See Figures 6.2.3.4-1 through 6.2.3.4-30.

**: See footnotes in Table 6.2.3.4-1.



**Table 6.2.3.4-8 Thermal Loads for Shell Elements,
LOCA After 72 hours: Summer**

Location	Index*	Boundary**		Thickness (mm)	Td (°C)	Tg (°C)	Note
		1	2				
Basemat	BM1	RM	GR	4000	27.07	23.15	General
	BM2	DW	GR	5100	27.47	23.94	Below lower Drywell
	BM4	DW	FL	5100	27.47	23.94	At LOCA Flooding
	BM6	FP	GR	5500	32.20	33.40	Below Spent Fuel Pool
	BM7	FP	GR	4000	32.20	33.40	Skimmer Surge Tank
RCCV Wall	CV1	RM	RM	2000	40.00	0.00	Below Grade
	CV2	SP	RM	2000	58.58	63.97	Suppression Pool
	CV3	WW	RM	2000	61.28	74.05	Wetwell Air Space
	CV4	DW	RM	2000	72.43	100.39	Drywell General
	CV5	GP	RM	2000	58.55	63.96	Drywell GDCS Pool
	CV6	DW	MT	2000	80.52	85.14	Drywell MS Tunnel
Suppression Pool Slab	SP1	SP	RM	2000	58.63	63.98	
Top Slab	TS1	DW	DP	2400	69.29	92.58	Below DSP/FP
	TS2	DW	IP	2400	83.38	35.98	Below IC/PCCS
	TS3	DW	XP	2400	83.35	36.04	Below Expansion Pool
	TS4	DW	DP	2400	91.96	79.99	Around Drywell Head
	TS5	DW	RM	2400	68.39	94.07	Below Room
RPV Pedestal	RP1	DW	RM	2400	68.39	94.07	
	RP2	FL	RM	2400	67.34	89.83	At LOCA Flooding
Pool Girder	PG1	IP	DP	1600	63.99	65.12	
	PG2	XP	DP	1600	63.95	65.09	
	PG3	DP	RM	1600	41.69	2.62	
Pool Gate Wall IC/PCCS Pool Wall Expansion Pool Wall	PW1	DP	DP	1300	43.00	0.00	
	PW2	IP	IP	400	110.00	0.00	
	PW4	IP	XP	600	109.81	0.00	
	PW6	XP	XP	1000	102.60	0.00	
	PW7	XP	XP	2000	76.75	0.00	
	PW8	XP	RM	1000	73.42	63.26	
	PW9	XP	RM	2000	58.49	63.85	
	PW10	RM	RM	1000	40.00	0.00	
	PW11	RM	RM	2000	40.00	0.00	
	PW12	IP	XP	1000	102.63	0.00	
	PW13	IP	RM	1000	73.58	63.18	
	PW14	IP	XP	470	110.00	0.00	
Spent Fuel Pool Wall***	FP7	FP	RM	1500	45.05	7.70	
	FP8	FP	RM	1900	44.94	7.92	
	FP9	FP	RM	1750	44.97	7.85	Around Skimmer Surge Tank
	FP10	FP	RM	2000	44.91	-7.96	
	FP11	FP	FP	1900	48.90	0.00	
	FP12	FP	FP	1750	48.90	0.00	Between Skimmer Surge Tanks

Note *: See Figures 6.2.3.4-1 through 6.2.3.4-30.

**: See footnotes in Table 6.2.3.4-1.

***: The spent fuel pool is normal condition.



**Table 6.2.3.4-8 Thermal Loads for Shell Elements,
LOCA After 72 hours: Summer (Continued)**

Location	Index*	Boundary**		Thickness (mm)	Td (°C)	Tg (°C)	Note
		1	2				
Outer Wall	BW1	RM	GR	2000	26.47	21.94	Below Grade General
	BW4	RM	RM	2000	40.00	0.00	Below Grade Stair Case
	BW5	FP	GR	2000	32.19	33.39	Below Grade Spent Fuel Pool
	BW6	FP	GR	3600	32.20	33.39	
	GW1	RM	AT	1500	43.37	-5.14	EL 4650 ~ 27000 General
	GW2	RM	RM	1500	40.00	0.00	EL 4650 ~ 27000 Stair Case
	GW3	XP	AT	1000	74.79	62.12	EL 27000 ~ IC/PCCS Pool
	GW5	DP	AT	3000	44.52	-3.04	
	GW6	DP	AT	3500	44.53	-3.06	
	GW7	XP	AT	1500	66.71	62.44	
	GW8	XP	RM	1000	73.42	63.26	EL 27000 ~ Stair Case/Pool
	GW9	RM	AT	1000	43.49	-4.77	EL 27000 ~ Room
MS Tunnel	GW10	RM	RM	1000	40.00	0.00	EL 27000 ~ Stair Case
	GW11	DP	AT	1500	44.53	-3.05	
	MT1	MT	RM	1300	48.50	12.51	Wall inside Building
	MT2	MT	AT	1300	50.91	8.97	Wall outside Building
	MT4	MT	RM	1600	48.50	13.16	Slab inside Building
	MT5	MT	DP	2400	49.38	12.76	
	MT6	XP	MT	2400	63.41	43.71	
	MT7	MT	AT	1600	51.01	9.28	Slab outside Building
	MT8	MT	AT	2400	51.17	9.76	
Inner Wall	MT9	MT	RM	2400	48.50	14.23	
	IW1	RM	RM	-	40.00	0.00	General
Slab	SL1	RM	RM	-	40.00	0.00	General
	SL2	IP	RM	1000	73.41	63.28	Below & above IC/PCCS Pool
	SL3	XP	RM	1000	73.36	63.31	
	SL4	DP	RM	1000	41.78	2.43	
	SL5	RM	AT	1000	43.49	-4.77	RB Roof at EL 34000
	SL6	XP	AT	1000	74.79	62.12	
	SL7	RM	AT	700	43.63	-4.36	RB Roof at EL 57400
	SL8	RM	AT	700	43.63	-4.36	FB Roof at EL 22500
RCCV Liner	CVL2	-	-	-	110.00	0.00	Suppression Pool
	CVL3	-	-	-	121.00	0.00	Wetwell Air Space
	CVL4	-	-	-	150.00	0.00	Drywell General
	CVL5	-	-	-	110.00	0.00	Drywell GDCS Pool
RPV Pedestal & Basemat Liner	RPL1	-	-	-	150.00	0.00	
	RPL2	-	-	-	145.00	0.00	At LOCA Flooding
MAT Liner	MTL1	-	-	-	47.08	0.00	Lower Drywell

Note *: See Figures 6.2.3.4-1 through 6.2.3.4-30.

**: See footnotes in Table 6.2.3.4-1.



**Table 6.2.3.4-9 Thermal Loads for Shell Elements,
Normal Operation: Winter**

Location	Index*	Boundary**		Thickness (mm)	Td (°C)	Tg (°C)	Note
		1	2				
Basemat	BM1	RM	GR	4000	12.90	-5.20	General
	BM2	DW	GR	5100	27.47	23.94	Below lower Drywell
	BM4	DW	FL	5100	-	-	At LOCA Flooding
	BM6	FP	GR	5500	32.20	33.40	Below Spent Fuel Pool
	BM7	FP	GR	4000	32.20	33.40	Skimmer Surge Tank
RCCV Wall	CV1	RM	RM	2000	10.00	0.00	Below Grade
	CV2	SP	RM	2000	28.22	29.53	Suppression Pool
	CV3	VW	RM	2000	26.50	26.73	Wetwell Air Space
	CV4	DW	RM	2000	33.50	38.08	Drywell General
	CV5	GP	RM	2000	28.23	29.54	Drywell GDCS Pool
	CV6	DW	MT	2000	57.00	0.00	Drywell MS Tunnel
Suppression Pool Slab	SP1	SP	RM	2000	28.22	29.50	
Top Slab	TS1	DW	DP	2400	49.38	12.75	Below DSP/FP
	TS2	DW	IP	2400	49.38	12.75	Below IC/PCCS
	TS3	DW	XP	2400	49.38	12.75	Below Expansion Pool
	TS4	DW	DP	2400	50.81	12.61	Around Drywell Head
	TS5	DW	RM	2400	33.50	39.33	Below Room
RPV Pedestal	RP1	DW	RM	2400	33.50	39.33	
	RP2	FL	RM	2400	-	-	At LOCA Flooding
Pool Girder	PG1	IP	DP	1600	43.00	0.00	
	PG2	XP	DP	1600	43.00	0.00	
	PG3	DP	RM	1600	28.60	28.80	
Pool Gate Wall IC/PCCS Pool Wall Expansion Pool Wall	PW1	DP	DP	1300	43.00	0.00	
	PW2	IP	IP	400	43.00	0.00	
	PW4	IP	XP	600	43.00	0.00	
	PW6	XP	XP	1000	43.00	0.00	
	PW7	XP	XP	2000	43.00	0.00	
	PW8	XP	RM	1000	29.63	26.71	
	PW9	XP	RM	2000	28.22	29.53	
	PW10	RM	RM	1000	10.00	0.00	
	PW11	RM	RM	2000	10.00	0.00	
	PW12	IP	XP	1000	43.00	0.00	
	PW13	IP	RM	1000	29.65	26.67	
	PW14	IP	XP	470	43.00	0.00	
Spent Fuel Pool Wall***	FP7	FP	RM	1500	32.07	33.63	
	FP8	FP	RM	1900	31.58	34.62	
	FP9	FP	RM	1750	31.74	34.30	Around Skimmer Surge Tank
	FP10	FP	RM	2000	31.48	-34.82	
	FP11	FP	FP	1900	48.90	0.00	
	FP12	FP	FP	1750	48.90	0.00	Between Skimmer Surge Tanks

Note *: See Figures 6.2.3.4-1 through 6.2.3.4-30.

**: See footnotes in Table 6.2.3.4-1.

***: The spent fuel pool is normal condition.



**Table 6.2.3.4-9 Thermal Loads for Shell Elements,
Normal Operation: Winter (Continued)**

Location	Index*	Boundary**		Thickness (mm)	Td (°C)	Tg (°C)	Note
		1	2				
Outer Wall	BW1	RM	GR	2000	13.04	-4.93	Below Grade General
	BW4	RM	RM	2000	10.00	0.00	Below Grade Stair Case
	BW5	FP	GR	2000	32.19	33.39	Below Grade Spent Fuel Pool
	BW6	FP	GR	3600	32.20	33.39	
	GW1	RM	AT	1500	-17.73	42.29	EL 4650 ~ 27000 General
	GW2	RM	RM	1500	10.00	0.00	EL 4650 ~ 27000 Stair Case
	GW3	XP	AT	1000	3.08	79.74	EL 27000 ~ IC/PCCS Pool
	GW5	DP	AT	3000	2.17	81.66	
	GW6	DP	AT	3500	1.97	82.06	
	GW7	XP	AT	1500	2.57	80.80	
	GW8	XP	RM	1000	29.63	26.71	EL 27000 ~ Stair Case/Pool
	GW9	RM	AT	1000	-18.80	39.27	EL 27000 ~ Room
	GW10	RM	RM	1000	10.00	0.00	EL 27000 ~ Stair Case
	GW11	DP	AT	1500	2.58	80.84	
MS Tunnel	MT1	MT	RM	1300	33.50	34.58	Wall inside Building
	MT2	MT	AT	1300	2.54	80.15	Wall outside Building
	MT4	MT	RM	1600	33.50	36.39	Slab inside Building
	MT5	MT	DP	2400	49.38	12.76	
	MT6	XP	MT	2400	49.38	-12.75	
	MT7	MT	AT	1600	3.49	82.85	Slab outside Building
	MT8	MT	AT	2400	4.99	87.08	
	MT9	MT	RM	2400	33.50	39.30	
Inner Wall	IW1	RM	RM	-	10.00	0.00	General
Slab	SL1	RM	RM	-	10.00	0.00	General
	SL2	IP	RM	1000	26.49	22.45	Below & above IC/PCCS Pool
	SL3	XP	RM	1000	26.49	22.45	
	SL4	DP	RM	1000	29.62	26.76	
	SL5	RM	AT	1000	-18.80	39.27	RB Roof at EL 34000
	SL6	XP	AT	1000	3.08	79.74	
	SL7	RM	AT	700	-19.97	35.96	RB Roof at EL 57400
	SL8	RM	AT	700	-19.97	35.96	FB Roof at EL 22500
RCCV Liner	CVL2	-	-	-	43.00	0.00	Suppression Pool
	CVL3	-	-	-	43.00	0.00	Wetwell Air Space
	CVL4	-	-	-	57.00	0.00	Drywell General
	CVL5	-	-	-	43.00	0.00	Drywell GDCS Pool
RPV Pedestal & Basemat Liner	RPL1	-	-	-	57.00	0.00	
	RPL2	-	-	-	-	-	At LOCA Flooding
MAT Liner	MTL1	-	-	-	46.02	0.00	Lower Drywell

Note *: See Figures 6.2.3.4-1 through 6.2.3.4-30.

**: See footnotes in Table 6.2.3.4-1.



**Table 6.2.3.4-10 Thermal Loads for Shell Elements,
LOCA After 5 seconds: Winter**

Location	Index*	Boundary**		Thickness (mm)	Td (°C)	Tg (°C)	Note
		1	2				
Basemat	BM1	RM	GR	4000	12.90	-5.20	General
	BM2	DW	GR	5100	27.47	23.94	Below lower Drywell
	BM4	DW	FL	5100	27.47	23.94	At LOCA Flooding
	BM6	FP	GR	5500	32.20	33.40	Below Spent Fuel Pool
	BM7	FP	GR	4000	32.20	33.40	Skimmer Surge Tank
RCCV Wall	CV1	RM	RM	2000	10.00	0.00	Below Grade
	CV2	SP	RM	2000	28.22	29.53	Suppression Pool
	CV3	WW	RM	2000	26.61	27.42	Wetwell Air Space
	CV4	DW	RM	2000	33.85	40.18	Drywell General
	CV5	GP	RM	2000	28.23	29.54	Drywell GDCS Pool
	CV6	DW	MT	2000	57.33	1.97	Drywell MS Tunnel
Suppression Pool Slab	SP1	SP	RM	2000	28.22	29.50	
Top Slab	TS1	DW	DP	2400	49.72	14.76	Below DSP/FP
	TS2	DW	IP	2400	49.72	14.76	Below IC/PCCS
	TS3	DW	XP	2400	49.72	14.76	Below Expansion Pool
	TS4	DW	DP	2400	51.23	15.08	Around Drywell Head
	TS5	DW	RM	2400	33.85	41.41	Below Room
RPV Pedestal	RP1	DW	RM	2400	33.85	41.41	
	RP2	FL	RM	2400	33.95	42.01	At LOCA Flooding
Pool Girder	PG1	IP	DP	1600	43.00	0.00	
	PG2	XP	DP	1600	43.00	0.00	
	PG3	DP	RM	1600	28.60	28.80	
Pool Gate Wall IC/PCCS Pool Wall Expansion Pool Wall	PW1	DP	DP	1300	43.00	0.00	
	PW2	IP	IP	400	43.00	0.00	
	PW4	IP	XP	600	43.00	0.00	
	PW6	XP	XP	1000	43.00	0.00	
	PW7	XP	XP	2000	43.00	0.00	
	PW8	XP	RM	1000	29.63	26.71	
	PW9	XP	RM	2000	28.22	29.53	
	PW10	RM	RM	1000	10.00	0.00	
	PW11	RM	RM	2000	10.00	0.00	
	PW12	IP	XP	1000	43.00	0.00	
	PW13	IP	RM	1000	29.65	26.67	
	PW14	IP	XP	470	43.00	0.00	
Spent Fuel Pool Wall***	FP7	FP	RM	1500	32.07	33.63	
	FP8	FP	RM	1900	31.58	34.62	
	FP9	FP	RM	1750	31.74	34.30	Around Skimmer Surge Tank
	FP10	FP	RM	2000	31.48	-34.82	
	FP11	FP	FP	1900	48.90	0.00	
	FP12	FP	FP	1750	48.90	0.00	Between Skimmer Surge Tanks

Note *: See Figures 6.2.3.4-1 through 6.2.3.4-30.

**: See footnotes in Table 6.2.3.4-1.

***: The spent fuel pool is normal condition.



**Table 6.2.3.4-10 Thermal Loads for Shell Elements,
LOCA After 5 seconds: Winter (Continued)**

Location	Index*	Boundary**		Thickness (mm)	Td (°C)	Tg (°C)	Note
		1	2				
Outer Wall	BW1	RM	GR	2000	13.04	-4.93	Below Grade General
	BW4	RM	RM	2000	10.00	0.00	Below Grade Stair Case
	BW5	FP	GR	2000	32.19	33.39	Below Grade Spent Fuel Pool
	BW6	FP	GR	3600	32.20	33.39	
	GW1	RM	AT	1500	-17.73	42.29	EL 4650 ~ 27000 General
	GW2	RM	RM	1500	10.00	0.00	EL 4650 ~ 27000 Stair Case
	GW3	XP	AT	1000	3.08	79.74	EL 27000 ~ IC/PCCS Pool
	GW5	DP	AT	3000	2.17	81.66	
	GW6	DP	AT	3500	1.97	82.06	
	GW7	XP	AT	1500	2.57	80.80	
	GW8	XP	RM	1000	29.63	26.71	EL 27000 ~ Stair Case/Pool
	GW9	RM	AT	1000	-18.80	39.27	EL 27000 ~ Room
MS Tunnel	GW10	RM	RM	1000	10.00	0.00	EL 27000 ~ Stair Case
	GW11	DP	AT	1500	2.58	80.84	
	MT1	MT	RM	1300	33.50	34.58	Wall inside Building
	MT2	MT	AT	1300	2.54	80.15	Wall outside Building
	MT4	MT	RM	1600	33.50	36.39	Slab inside Building
	MT5	MT	DP	2400	49.38	12.76	
	MT6	XP	MT	2400	49.38	-12.75	
	MT7	MT	AT	1600	3.49	82.85	Slab outside Building
	MT8	MT	AT	2400	4.99	87.08	
Inner Wall	MT9	MT	RM	2400	33.50	39.30	
	IW1	RM	RM	-	10.00	0.00	General
Slab	SL1	RM	RM	-	10.00	0.00	General
	SL2	IP	RM	1000	26.51	22.55	Below & above IC/PCCS Pool
	SL3	XP	RM	1000	26.51	22.55	
	SL4	DP	RM	1000	29.62	26.76	
	SL5	RM	AT	1000	-18.80	39.27	RB Roof at EL 34000
	SL6	XP	AT	1000	3.08	79.74	
	SL7	RM	AT	700	-19.97	35.96	RB Roof at EL 57400
	SL8	RM	AT	700	-19.97	35.96	FB Roof at EL 22500
RCCV Liner	CVL2	-	-	-	43.00	0.00	Suppression Pool
	CVL3	-	-	-	86.20	0.00	Wetwell Air Space
	CVL4	-	-	-	133.67	0.00	Drywell General
	CVL5	-	-	-	43.00	0.00	Drywell GDCS Pool
RPV Pedestal & Basemat Liner	RPL1	-	-	-	133.67	0.00	
	RPL2	-	-	-	145.00	0.00	At LOCA Flooding
MAT Liner	MTL1	-	-	-	46.02	0.00	Lower Drywell

Note *: See Figures 6.2.3.4-1 through 6.2.3.4-30.

**: See footnotes in Table 6.2.3.4-1.

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 121

REV. 2

of 543

**Table 6.2.3.4-11 Thermal Loads for Shell Elements,
LOCA After 6 minutes: Winter**

Location	Index*	Boundary**		Thickness (mm)	Td (°C)	Tg (°C)	Note
		1	2				
Basemat	BM1	RM	GR	4000	12.90	-5.20	General
	BM2	DW	GR	5100	27.47	23.94	Below lower Drywell
	BM4	DW	FL	5100	27.47	23.94	At LOCA Flooding
	BM6	FP	GR	5500	32.20	33.40	Below Spent Fuel Pool
	BM7	FP	GR	4000	32.20	33.40	Skimmer Surge Tank
RCCV Wall	CV1	RM	RM	2000	10.00	0.00	Below Grade
	CV2	SP	RM	2000	28.77	32.74	Suppression Pool
	CV3	WW	RM	2000	27.38	31.96	Wetwell Air Space
	CV4	DW	RM	2000	34.70	45.19	Drywell General
	CV5	GP	RM	2000	28.23	29.54	Drywell GDCS Pool
	CV6	DW	MT	2000	58.16	6.84	Drywell MS Tunnel
Suppression Pool Slab	SP1	SP	RM	2000	28.70	32.35	
Top Slab	TS1	DW	DP	2400	50.40	18.79	Below DSP/FP
	TS2	DW	IP	2400	50.59	17.62	Below IC/PCCS
	TS3	DW	XP	2400	50.58	17.72	Below Expansion Pool
	TS4	DW	DP	2400	53.41	18.97	Around Drywell Head
	TS5	DW	RM	2400	34.54	45.48	Below Room
RPV Pedestal	RP1	DW	RM	2400	34.54	45.48	
	RP2	FL	RM	2400	34.31	44.14	At LOCA Flooding
Pool Girder	PG1	IP	DP	1600	43.26	1.52	
	PG2	XP	DP	1600	43.24	1.40	
	PG3	DP	RM	1600	28.60	28.80	
Pool Gate Wall IC/PCCS Pool Wall Expansion Pool Wall	PW1	DP	DP	1300	43.00	0.00	
	PW2	IP	IP	400	44.89	0.00	
	PW4	IP	XP	600	44.21	0.30	
	PW6	XP	XP	1000	43.71	0.00	
	PW7	XP	XP	2000	43.40	0.00	
	PW8	XP	RM	1000	29.98	28.78	
	PW9	XP	RM	2000	28.42	30.72	
	PW10	RM	RM	1000	10.00	0.00	
	PW11	RM	RM	2000	10.00	0.00	
	PW12	IP	XP	1000	43.74	0.19	
	PW13	IP	RM	1000	30.04	28.93	
	PW14	IP	XP	470	44.54	0.38	
Spent Fuel Pool Wall***	FP7	FP	RM	1500	32.07	33.63	
	FP8	FP	RM	1900	31.58	34.62	
	FP9	FP	RM	1750	31.74	34.30	Around Skimmer Surge Tank
	FP10	FP	RM	2000	31.48	-34.82	
	FP11	FP	FP	1900	48.90	0.00	
	FP12	FP	FP	1750	48.90	0.00	Between Skimmer Surge Tanks

Note *: See Figures 6.2.3.4-1 through 6.2.3.4-30.

**: See footnotes in Table 6.2.3.4-1.

***: The spent fuel pool is normal condition.



**Table 6.2.3.4-11 Thermal Loads for Shell Elements,
LOCA After 6 minutes: Winter (Continued)**

Location	Index*	Boundary**		Thickness (mm)	Td (°C)	Tg (°C)	Note
		1	2				
Outer Wall	BW1	RM	GR	2000	13.04	-4.93	Below Grade General
	BW4	RM	RM	2000	10.00	0.00	Below Grade Stair Case
	BW5	FP	GR	2000	32.19	33.39	Below Grade Spent Fuel Pool
	BW6	FP	GR	3600	32.20	33.39	
	GW1	RM	AT	1500	-17.73	42.29	EL 4650 ~ 27000 General
	GW2	RM	RM	1500	10.00	0.00	EL 4650 ~ 27000 Stair Case
	GW3	XP	AT	1000	3.43	81.80	EL 27000 ~ IC/PCCS Pool
	GW5	DP	AT	3000	2.17	81.66	
	GW6	DP	AT	3500	1.97	82.06	
	GW7	XP	AT	1500	2.81	82.27	
	GW8	XP	RM	1000	29.98	28.78	EL 27000 ~ Stair Case/Pool
	GW9	RM	AT	1000	-18.80	39.27	EL 27000 ~ Room
	GW10	RM	RM	1000	10.00	0.00	EL 27000 ~ Stair Case
MS Tunnel	MT1	MT	RM	1300	33.50	34.58	Wall inside Building
	MT2	MT	AT	1300	2.54	80.15	Wall outside Building
	MT4	MT	RM	1600	33.50	36.39	Slab inside Building
	MT5	MT	DP	2400	49.38	12.76	
	MT6	XP	MT	2400	49.56	-11.69	
	MT7	MT	AT	1600	3.49	82.85	Slab outside Building
	MT8	MT	AT	2400	4.99	87.08	
	MT9	MT	RM	2400	33.50	39.30	
Inner Wall	IW1	RM	RM	-	10.00	0.00	General
Slab	SL1	RM	RM	-	10.00	0.00	General
	SL2	IP	RM	1000	26.97	25.26	Below & above IC/PCCS Pool
	SL3	XP	RM	1000	26.94	25.08	
	SL4	DP	RM	1000	29.62	26.76	
	SL5	RM	AT	1000	-18.80	39.27	RB Roof at EL 34000
	SL6	XP	AT	1000	3.43	81.80	
	SL7	RM	AT	700	-19.97	35.96	RB Roof at EL 57400
	SL8	RM	AT	700	-19.97	35.96	FB Roof at EL 22500
RCCV Liner	CVL2	-	-	-	110.00	0.00	Suppression Pool
	CVL3	-	-	-	130.00	0.00	Wetwell Air Space
	CVL4	-	-	-	171.00	0.00	Drywell General
	CVL5	-	-	-	43.00	0.00	Drywell GDCS Pool
RPV Pedestal & Basemat Liner	RPL1	-	-	-	171.00	0.00	
	RPL2	-	-	-	145.00	0.00	At LOCA Flooding
MAT Liner	MTL1	-	-	-	46.02	0.00	Lower Drywell

Note *: See Figures 6.2.3.4-1 through 6.2.3.4-30.

**: See footnotes in Table 6.2.3.4-1.



**Table 6.2.3.4-12 Thermal Loads for Shell Elements,
LOCA After 10 hours: Winter**

Location	Index*	Boundary**		Thickness (mm)	Td (°C)	Tg (°C)	Note
		1	2				
Basemat	BM1	RM	GR	4000	12.90	-5.20	General
	BM2	DW	GR	5100	27.47	23.94	Below lower Drywell
	BM4	DW	FL	5100	27.47	23.94	At LOCA Flooding
	BM6	FP	GR	5500	32.20	33.40	Below Spent Fuel Pool
	BM7	FP	GR	4000	32.20	33.40	Skimmer Surge Tank
RCCV Wall	CV1	RM	RM	2000	10.00	0.00	Below Grade
	CV2	SP	RM	2000	34.51	61.70	Suppression Pool
	CV3	WW	RM	2000	34.13	65.76	Wetwell Air Space
	CV4	DW	RM	2000	42.70	85.11	Drywell General
	CV5	GP	RM	2000	34.42	61.30	Drywell GDCS Pool
	CV6	DW	MT	2000	65.78	44.88	Drywell MS Tunnel
Suppression Pool Slab	SP1	SP	RM	2000	34.51	61.63	
Top Slab	TS1	DW	DP	2400	56.81	51.83	Below DSP/FP
	TS2	DW	IP	2400	61.94	24.80	Below IC/PCCS
	TS3	DW	XP	2400	61.85	25.20	Below Expansion Pool
	TS4	DW	DP	2400	68.65	48.56	Around Drywell Head
	TS5	DW	RM	2400	41.12	79.39	Below Room
RPV Pedestal	RP1	DW	RM	2400	41.12	79.39	
	RP2	FL	RM	2400	40.71	77.28	At LOCA Flooding
Pool Girder	PG1	IP	DP	1600	50.70	37.81	
	PG2	XP	DP	1600	50.57	37.30	
	PG3	DP	RM	1600	28.60	28.80	
Pool Gate Wall IC/PCCS Pool Wall Expansion Pool Wall	PW1	DP	DP	1300	43.00	0.00	
	PW2	IP	IP	400	100.11	0.00	
	PW4	IP	XP	600	83.87	0.33	
	PW6	XP	XP	1000	67.33	0.00	
	PW7	XP	XP	2000	55.10	0.00	
	PW8	XP	RM	1000	41.72	78.55	
	PW9	XP	RM	2000	34.25	60.57	
	PW10	RM	RM	1000	10.00	0.00	
	PW11	RM	RM	2000	10.00	0.00	
	PW12	IP	XP	1000	67.53	0.58	
	PW13	IP	RM	1000	42.01	79.27	
	PW14	IP	XP	470	93.68	0.12	
Spent Fuel Pool Wall***	FP7	FP	RM	1500	32.07	33.63	
	FP8	FP	RM	1900	31.58	34.62	
	FP9	FP	RM	1750	31.74	34.30	Around Skimmer Surge Tank
	FP10	FP	RM	2000	31.48	-34.82	
	FP11	FP	FP	1900	48.90	0.00	
	FP12	FP	FP	1750	48.90	0.00	Between Skimmer Surge Tanks

Note *: See Figures 6.2.3.4-1 through 6.2.3.4-30.

**: See footnotes in Table 6.2.3.4-1.

***: The spent fuel pool is normal condition.



**Table 6.2.3.4-12 Thermal Loads for Shell Elements,
LOCA After 10 hours: Winter (Continued)**

Location	Index*	Boundary**		Thickness (mm)	Td (°C)	Tg (°C)	Note
		1	2				
Outer Wall	BW1	RM	GR	2000	13.04	-4.93	Below Grade General
	BW4	RM	RM	2000	10.00	0.00	Below Grade Stair Case
	BW5	FP	GR	2000	32.19	33.39	Below Grade Spent Fuel Pool
	BW6	FP	GR	3600	32.20	33.39	
	GW1	RM	AT	1500	-17.73	42.29	EL 4650 ~ 27000 General
	GW2	RM	RM	1500	10.00	0.00	EL 4650 ~ 27000 Stair Case
	GW3	XP	AT	1000	15.17	131.57	EL 27000 ~ IC/PCCS Pool
	GW5	DP	AT	3000	2.17	81.66	
	GW6	DP	AT	3500	1.97	82.06	
	GW7	XP	AT	1500	10.61	119.91	
	GW8	XP	RM	1000	41.72	78.55	EL 27000 ~ Stair Case/Pool
	GW9	RM	AT	1000	-18.80	39.27	EL 27000 ~ Room
	GW10	RM	RM	1000	10.00	0.00	EL 27000 ~ Stair Case
	GW11	DP	AT	1500	2.58	80.84	
MS Tunnel	MT1	MT	RM	1300	33.50	34.58	Wall inside Building
	MT2	MT	AT	1300	2.54	80.15	Wall outside Building
	MT4	MT	RM	1600	33.50	36.39	Slab inside Building
	MT5	MT	DP	2400	49.38	12.76	
	MT6	XP	MT	2400	54.41	13.82	
	MT7	MT	AT	1600	3.49	82.85	Slab outside Building
	MT8	MT	AT	2400	4.99	87.08	
	MT9	MT	RM	2400	33.50	39.30	
Inner Wall	IW1	RM	RM	-	10.00	0.00	General
Slab	SL1	RM	RM	-	10.00	0.00	General
	SL2	IP	RM	1000	39.78	79.05	Below & above IC/PCCS Pool
	SL3	XP	RM	1000	39.58	78.47	
	SL4	DP	RM	1000	29.62	26.76	
	SL5	RM	AT	1000	-18.80	39.27	RB Roof at EL 34000
	SL6	XP	AT	1000	15.17	131.57	
	SL7	RM	AT	700	-19.97	35.96	RB Roof at EL 57400
	SL8	RM	AT	700	-19.97	35.96	FB Roof at EL 22500
RCCV Liner	CVL2	-	-	-	110.00	0.00	Suppression Pool
	CVL3	-	-	-	121.00	0.00	Wetwell Air Space
	CVL4	-	-	-	150.00	0.00	Drywell General
	CVL5	-	-	-	110.00	0.00	Drywell GDCS Pool
RPV Pedestal & Basemat Liner	RPL1	-	-	-	150.00	0.00	
	RPL2	-	-	-	145.00	0.00	At LOCA Flooding
MAT Liner	MTL1	-	-	-	46.02	0.00	Lower Drywell

Note *: See Figures 6.2.3.4-1 through 6.2.3.4-30.

**: See footnotes in Table 6.2.3.4-1.



**Table 6.2.3.4-13 Thermal Loads for Shell Elements,
LOCA After 72 hours: Winter**

Location	Index*	Boundary**		Thickness (mm)	Td (°C)	Tg (°C)	Note
		1	2				
Basemat	BM1	RM	GR	4000	12.90	-5.20	General
	BM2	DW	GR	5100	27.47	23.94	Below lower Drywell
	BM4	DW	FL	5100	27.47	23.94	At LOCA Flooding
	BM6	FP	GR	5500	32.20	33.40	Below Spent Fuel Pool
	BM7	FP	GR	4000	32.20	33.40	Skimmer Surge Tank
RCCV Wall	CV1	RM	RM	2000	10.00	0.00	Below Grade
	CV2	SP	RM	2000	45.15	90.82	Suppression Pool
	CV3	WW	RM	2000	47.00	100.95	Wetwell Air Space
	CV4	DW	RM	2000	58.15	127.30	Drywell General
	CV5	GP	RM	2000	45.12	90.82	Drywell GDCS Pool
	CV6	DW	MT	2000	80.52	85.14	Drywell MS Tunnel
Suppression Pool Slab	SP1	SP	RM	2000	45.20	90.80	
Top Slab	TS1	DW	DP	2400	69.29	92.58	Below DSP/FP
	TS2	DW	IP	2400	83.38	35.98	Below IC/PCCS
	TS3	DW	XP	2400	83.35	36.04	Below Expansion Pool
	TS4	DW	DP	2400	91.96	79.99	Around Drywell Head
	TS5	DW	RM	2400	53.91	121.24	Below Room
RPV Pedestal	RP1	DW	RM	2400	53.91	121.24	
	RP2	FL	RM	2400	52.85	117.00	At LOCA Flooding
Pool Girder	PG1	IP	DP	1600	63.99	65.12	
	PG2	XP	DP	1600	63.95	65.09	
	PG3	DP	RM	1600	28.60	28.80	
Pool Gate Wall IC/PCCS Pool Wall Expansion Pool Wall	PW1	DP	DP	1300	43.00	0.00	
	PW2	IP	IP	400	110.00	0.00	
	PW4	IP	XP	600	109.81	0.00	
	PW6	XP	XP	1000	102.60	0.00	
	PW7	XP	XP	2000	76.75	0.00	
	PW8	XP	RM	1000	61.26	87.55	
	PW9	XP	RM	2000	45.06	90.70	
	PW10	RM	RM	1000	10.00	0.00	
	PW11	RM	RM	2000	10.00	0.00	
	PW12	IP	XP	1000	102.63	0.00	
	PW13	IP	RM	1000	61.44	87.42	
	PW14	IP	XP	470	110.00	0.00	
Spent Fuel Pool Wall***	FP7	FP	RM	1500	32.07	33.63	
	FP8	FP	RM	1900	31.58	34.62	
	FP9	FP	RM	1750	31.74	34.30	Around Skimmer Surge Tank
	FP10	FP	RM	2000	31.48	-34.82	
	FP11	FP	FP	1900	48.90	0.00	
	FP12	FP	FP	1750	48.90	0.00	Between Skimmer Surge Tanks

Note *: See Figures 6.2.3.4-1 through 6.2.3.4-30.

**: See footnotes in Table 6.2.3.4-1.

***: The spent fuel pool is normal condition.



**Table 6.2.3.4-13 Thermal Loads for Shell Elements,
LOCA After 72 hours: Winter (Continued)**

Location	Index*	Boundary**		Thickness (mm)	Td (°C)	Tg (°C)	Note
		1	2				
Outer Wall	BW1	RM	GR	2000	13.04	-4.93	Below Grade General
	BW4	RM	RM	2000	10.00	0.00	Below Grade Stair Case
	BW5	FP	GR	2000	32.19	33.39	Below Grade Spent Fuel Pool
	BW6	FP	GR	3600	32.20	33.39	
	GW1	RM	AT	1500	-17.73	42.29	EL 4650 ~ 27000 General
	GW2	RM	RM	1500	10.00	0.00	EL 4650 ~ 27000 Stair Case
	GW3	XP	AT	1000	33.31	145.06	EL 27000 ~ IC/PCCS Pool
	GW5	DP	AT	3000	2.17	81.66	
	GW6	DP	AT	3500	1.97	82.06	
	GW7	XP	AT	1500	24.77	146.28	
	GW8	XP	RM	1000	61.26	87.55	EL 27000 ~ Stair Case/Pool
	GW9	RM	AT	1000	-18.80	39.27	EL 27000 ~ Room
MS Tunnel	GW10	RM	RM	1000	10.00	0.00	EL 27000 ~ Stair Case
	GW11	DP	AT	1500	2.58	80.84	
	MT1	MT	RM	1300	33.50	34.58	Wall inside Building
	MT2	MT	AT	1300	2.54	80.15	Wall outside Building
	MT4	MT	RM	1600	33.50	36.39	Slab inside Building
	MT5	MT	DP	2400	49.38	12.76	
	MT6	XP	MT	2400	63.41	43.71	
	MT7	MT	AT	1600	3.49	82.85	Slab outside Building
	MT8	MT	AT	2400	4.99	87.08	
Inner Wall	MT9	MT	RM	2400	33.50	39.30	
	IW1	RM	RM	-	10.00	0.00	General
Slab	SL1	RM	RM	-	10.00	0.00	General
	SL2	IP	RM	1000	60.67	88.02	Below & above IC/PCCS Pool
	SL3	XP	RM	1000	60.63	88.06	
	SL4	DP	RM	1000	29.62	26.76	
	SL5	RM	AT	1000	-18.80	39.27	RB Roof at EL 34000
	SL6	XP	AT	1000	33.31	145.06	
	SL7	RM	AT	700	-19.97	35.96	RB Roof at EL 57400
	SL8	RM	AT	700	-19.97	35.96	FB Roof at EL 22500
RCCV Liner	CVL2	-	-	-	110.00	0.00	Suppression Pool
	CVL3	-	-	-	121.00	0.00	Wetwell Air Space
	CVL4	-	-	-	150.00	0.00	Drywell General
	CVL5	-	-	-	110.00	0.00	Drywell GDCS Pool
RPV Pedestal & Basemat Liner	RPL1	-	-	-	150.00	0.00	
	RPL2	-	-	-	145.00	0.00	At LOCA Flooding
MAT Liner	MTL1	-	-	-	47.08	0.00	Lower Drywell

Note *: See Figures 6.2.3.4-1 through 6.2.3.4-30.

** : See footnotes in Table 6.2.3.4-1.



Table 6.2.3.4-14 Thermal Loads for Beam Elements

Column / Girder	Index	Boundary ^{*1}				Summer			Winter		
		x1	x2	y1	y2	Td (°C)	Tg'x ^{*2} (°C)	Tg'y ^{*2} (°C)	Td (°C)	Tg'x ^{*2} (°C)	Tg'y ^{*2} (°C)
Girder	CB1	RM	RM	RM	RM	40.00	0.00	0.00	10.00	0.00	0.00
Cloumn	CB1	RM	RM	RM	RM	40.00	0.00	0.00	10.00	0.00	0.00
	CB2	RM	RM	RM	AT	41.75	0.00	-3.18	-4.40	0.00	26.18
	CB3	RM	AT	RM	AT	43.49	-3.18	-3.18	-18.80	26.18	26.18
	CB4	RM	AT	RM	RM	41.75	-3.18	0.00	-4.40	26.18	0.00

*1: RM: Room AT: Outer Air

*2: Tg' means effective liner gradient.

$$Tg' = Tg/t$$

where Tg: Surface Temperature Difference
t: Thickness

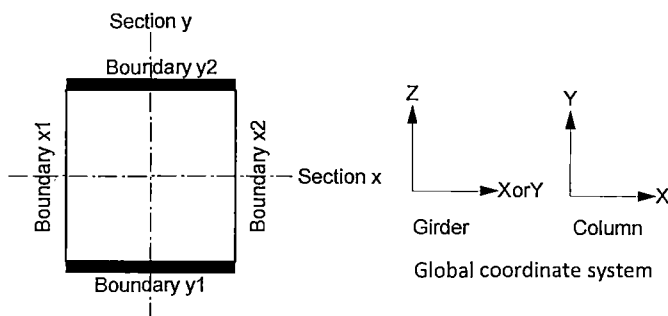


Table 6.2.3.4-15 Thermal Loads for Rod Elements of RCCV Top Head Opening at All Seasons

Event	Summer & Winter
	Td (°C)
Normal Operation	57.00
LOCA 5sec	133.67
LOCA 6min	171.00
LOCA 10hr	150.00
LOCA 72hr	150.00

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 128
REV. 2 of 543

Table 6.2.3.4-16 Design Thermal Load Labels

Load Label	Load Condition Event	Season	GDCS Condition	Spent Fuel Pool Condition	
TLS0	Normal Operation	Summer		Normal Operation	
TLW0		Winter			
TLS1	LOCA5sec	Summer	water height is 4.41m.		
TLW1		Winter			
TLS2	LOCA6min	Summer			
TLW2		Winter			
TLS3	LOCA10hr	Summer			
TLW3		Winter			
TLS4	LOCA72hr	Summer			
TLW4		Winter			
TLS5	LOCA5sec	Summer		water height is 0.792 m.	
TLW5		Winter			
TLS6	LOCA6min	Summer			
TLW6		Winter			
TLS7	LOCA10hr	Summer			
TLW7		Winter			
TLS8	LOCA72hr	Summer			
TLW8		Winter			
TFS5	LOCA5sec	Summer	LOCA Flooding water height is 0.792 m		
TFW5		Winter			
TFS6	LOCA6min	Summer			
TFW6		Winter			
TFS7	LOCA10hr	Summer			
TFW7		Winter			
TFS8	LOCA72hr	Summer			
TFW8		Winter			
TSS0	Normal Operation	Summer		water height is 0.792 m.	DBA 72hr
TSW0		Winter			
TSS8	LOCA72hr	Summer			
TSW8		Winter			
TWC1		Winter			
TWC2		Winter			
TWC3		Winter			
TWC4		Winter			



**Table 6.2.3.4-17 Thermal Loads for Shell Elements around Spent Fuel Pool,
72 hours After DBA: Summer**

Location	Index*	Boundary**		Thickness (mm)	Td (°C)	Tg (°C)	Note
		1	2				
Basemat	BM6	FP	GR	5500	36.74	56.83	Below Spent Fuel Pool
	BM7	FP	GR	4000	38.45	63.68	Skimmer Surge Tank
Spent Fuel Pool Wall***	FP7	FP	RM	1500	61.65	57.12	
	FP8	FP	RM	1900	58.10	54.97	
	FP9	FP	RM	1750	59.26	56.04	Around Skimmer Surge Tank
	FP10	FP	RM	2000	57.42	-54.16	
	FP11	FP	FP	1900	75.29	0.00	
	FP12	FP	FP	1750	77.51	0.00	Between Skimmer Surge Tanks
Outer Wall	BW5	FP	GR	2000	44.70	79.61	Below Grade Spent Fuel Pool
	BW6	FP	GR	3600	39.14	66.16	

*: See Figures 6.2.3.4-1 through 6.2.3.4-30.

**: See footnotes in Table 6.2.3.4-1.

***: The spent fuel pool is normal condition.

**Table 6.2.3.4-18 Thermal Loads for Shell Elements around Spent Fuel Pool,
72 hours After DBA: Winter**

Location	Index*	Boundary**		Thickness (mm)	Td (°C)	Tg (°C)	Note
		1	2				
Basemat	BM6	FP	GR	5500	36.74	56.83	Below Spent Fuel Pool
	BM7	FP	GR	4000	38.45	63.68	Skimmer Surge Tank
Spent Fuel Pool Wall***	FP7	FP	RM	1500	48.67	83.06	
	FP8	FP	RM	1900	44.74	81.67	
	FP9	FP	RM	1750	46.02	82.49	Around Skimmer Surge Tank
	FP10	FP	RM	2000	43.99	-81.01	
	FP11	FP	FP	1900	75.29	0.00	
	FP12	FP	FP	1750	77.51	0.00	Between Skimmer Surge Tanks
Outer Wall	BW5	FP	GR	2000	44.70	79.61	Below Grade Spent Fuel Pool
	BW6	FP	GR	3600	39.14	66.16	

*: See Figures 6.2.3.4-1 through 6.2.3.4-30.

**: See footnotes in Table 6.2.3.4-1.

***: The spent fuel pool is normal condition.



HITACHI

WG3-U71-ERD-S-0004 SH NO. 130

REV. 2

of 543

**Table 6.2.3.4-19 Thermal Loads for Shell Elements,
LOCA After 72 hours: Winter (Case 1)**

Portion	Section ^{*1}	Side ^{*2}		Thick. t		Temperature (°C)		Thin Film Coef. (kcal/m ² h°C)		Surface Temp. (°C)		Linearized Temp. (°C)		
		1	2	(mm)	(m)	T1	T2	h1	h2	Ts1	Ts2	Td	Tg	Tg/t
Floor Slab	E&W Side	SL1	RM RM	-	-	10.0	10.0	6.0E+00	6.0E+00	10.00	10.00	10.00	0.0	0.00
		SL4	RM BP	2400	2.4	10.0	44.0	6.0E+00	1.0E+99	13.01	44.00	28.51	-31.0	-12.91
		SL5	RM AT	1000	1.0	10.0	-40.0	6.0E+00	3.5E+01	0.84	-38.43	-18.80	39.3	39.27
	EAST Side	SL2E	IP RM	1000	1.0	110.0	10.0	1.0E+99	6.0E+00	110.00	28.92	69.46	81.1	81.08
		SL3E	RM XI	1500	1.5	10.0	110.0	6.0E+00	1.0E+99	23.46	110.00	66.73	-86.5	-57.69
		SL6E	XO AT	1000	1.0	43.0	-40.0	1.0E+99	3.5E+01	43.00	-36.81	3.10	79.8	79.81
		SL9E	RM XO	1500	1.5	10.0	43.0	6.0E+00	1.0E+99	14.44	43.00	28.72	-28.6	-19.04
		SL10E	RM XS	1500	1.5	10.0	110.0	6.0E+00	1.0E+99	23.46	110.00	66.73	-86.5	-57.69
		SL11E	XS RM	1000	1.0	110.0	10.0	1.0E+99	6.0E+00	110.00	28.92	69.46	81.1	81.08
		SL12E	PP RM	1000	1.0	110.0	10.0	1.0E+99	6.0E+00	110.00	28.92	69.46	81.1	81.08
		SL13E	XI RM	1000	1.0	110.0	10.0	1.0E+99	6.0E+00	110.00	28.92	69.46	81.1	81.08
	WEST Side	SL2W	IP RM	1000	1.0	110.0	10.0	1.0E+99	6.0E+00	110.00	28.92	69.46	81.1	81.08
		SL3W	RM XI	1500	1.5	10.0	110.0	6.0E+00	1.0E+99	23.46	110.00	66.73	-86.5	-57.69
		SL6W	XO AT	1000	1.0	43.0	-40.0	1.0E+99	3.5E+01	43.00	-36.81	3.10	79.8	79.81
		SL9W	RM XO	1500	1.5	10.0	43.0	6.0E+00	1.0E+99	14.44	43.00	28.72	-28.6	-19.04
		SL10W	RM XS	1500	1.5	10.0	110.0	6.0E+00	1.0E+99	23.46	110.00	66.73	-86.5	-57.69
		SL11W	XS RM	1000	1.0	110.0	10.0	1.0E+99	6.0E+00	110.00	28.92	69.46	81.1	81.08
		SL12W	PP RM	1000	1.0	110.0	10.0	1.0E+99	6.0E+00	110.00	28.92	69.46	81.1	81.08
		SL13W	XI RM	1000	1.0	110.0	10.0	1.0E+99	6.0E+00	110.00	28.92	69.46	81.1	81.08
MS Tunnel	E&W Side	MT5	MT DS	2400	2.4	57.0	110.0	1.0E+99	1.0E+99	57.00	110.00	83.50	-53.0	-22.08
		MT8	MT AT	2400	2.4	57.0	-40.0	1.0E+99	3.5E+01	57.00	-38.41	9.30	95.4	39.75
		MT9	MT RM	2400	2.4	57.0	10.0	1.0E+99	6.0E+00	57.00	14.16	35.58	42.8	17.85
	EAST Side	MT6E	MT XS	2400	2.4	57.0	110.0	1.0E+99	1.0E+99	57.00	110.00	83.50	-53.0	-22.08
	WEST Side	MT6W	MT XS	2400	2.4	57.0	110.0	1.0E+99	1.0E+99	57.00	110.00	83.50	-53.0	-22.08
Top Slab	E&W Side	TS1	DW DS	2400	2.4	150.0	110.0	6.0E+00	1.0E+99	146.46	110.00	128.23	36.5	15.19
		TS4	DW RW	2400	2.4	150.0	110.0	6.0E+00	1.0E+99	146.46	110.00	128.23	36.5	15.19
		TS5	DW RM	2400	2.4	150.0	10.0	6.0E+00	6.0E+00	138.60	21.40	80.00	117.2	48.84
		TS7	DW BP	2400	2.4	150.0	44.0	6.0E+00	1.0E+99	140.61	44.00	92.30	96.6	40.25
	EAST Side	TS2E	DW IP	2400	2.4	150.0	110.0	6.0E+00	1.0E+99	146.46	110.00	128.23	36.5	15.19
		TS3E	DW XI	2400	2.4	150.0	110.0	6.0E+00	1.0E+99	146.46	110.00	128.23	36.5	15.19
		TS6E	DW PP	2400	2.4	150.0	110.0	6.0E+00	1.0E+99	146.46	110.00	128.23	36.5	15.19
	WEST Side	TS2W	DW IP	2400	2.4	150.0	110.0	6.0E+00	1.0E+99	146.46	110.00	128.23	36.5	15.19
		TS3W	DW XI	2400	2.4	150.0	110.0	6.0E+00	1.0E+99	146.46	110.00	128.23	36.5	15.19
		TS6W	DW PP	2400	2.4	150.0	110.0	6.0E+00	1.0E+99	146.46	110.00	128.23	36.5	15.19
Pool Girder	E&W Side	PG3	RM DS	1600	1.6	10.0	110.0	6.0E+00	1.0E+99	22.73	110.00	66.36	-87.3	-54.55
		PG7	RM BP	1600	1.6	10.0	44.0	6.0E+00	1.0E+99	14.33	44.00	29.16	-29.7	-18.55
	EAST Side	PG1E	PP RW	1600	1.6	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PG2E	XI BP	1600	1.6	110.0	44.0	1.0E+99	1.0E+99	110.00	44.00	77.00	66.0	41.25
		PG4E	IP DS	1600	1.6	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PG5E	PP DS	1600	1.6	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PG6E	IP BP	1600	1.6	110.0	44.0	1.0E+99	1.0E+99	110.00	44.00	77.00	66.0	41.25
		PG8E	XS DS	1600	1.6	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PG9E	PP BP	1600	1.6	110.0	44.0	1.0E+99	1.0E+99	110.00	44.00	77.00	66.0	41.25
	WEST Side	PG1W	PP RW	1600	1.6	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PG2W	XI BP	1600	1.6	110.0	44.0	1.0E+99	1.0E+99	110.00	44.00	77.00	66.0	41.25
		PG4W	IP DS	1600	1.6	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PG5W	PP DS	1600	1.6	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PG6W	IP BP	1600	1.6	110.0	44.0	1.0E+99	1.0E+99	110.00	44.00	77.00	66.0	41.25
		PG8W	XS DS	1600	1.6	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PG9W	PP BP	1600	1.6	110.0	44.0	1.0E+99	1.0E+99	110.00	44.00	77.00	66.0	41.25



**Table 6.2.3.4-19 Thermal Loads for Shell Elements,
LOCA After 72 hours: Winter (Case 1) Continued**

Portion	Section ^{*1}	Side ^{*2}		Thick. t		Temperature (°C)		Thin Film Coef. (kcal/m ² h°C)		Surface Temp. (°C)		Linearized Temp. (°C)		
		1	2	(mm)	(m)	T1	T2	h1	h2	Ts1	Ts2	Td	Tg	Tg/t
External Wall	E&W Side	GW1	AT RM	1500	1.5	-40.0	10.0	3.5E+01	6.0E+00	-38.87	3.42	-17.73	-42.3	-28.20
		GW5	AT BP	2440	2.4	-40.0	44.0	3.5E+01	1.0E+99	-38.65	44.00	2.68	-82.6	-33.87
		GW6	DS AT	3500	3.5	110.0	-40.0	1.0E+99	3.5E+01	110.00	-38.31	35.85	148.3	42.37
		GW9	AT RM	1000	1.0	-40.0	10.0	3.5E+01	6.0E+00	-38.43	0.84	-18.80	-39.3	-39.27
		GW10	RM RM	1000	1.0	10.0	10.0	6.0E+00	6.0E+00	10.00	10.00	10.00	0.0	0.00
	EAST Side	GW11	AT BP	1500	1.5	-40.0	44.0	3.5E+01	1.0E+99	-37.82	44.00	3.09	-81.8	-54.55
		GW3E	AT XO	1000	1.0	-40.0	43.0	3.5E+01	1.0E+99	-36.81	43.00	3.10	-79.8	-79.81
		GW7E	XS AT	1500	1.5	110.0	-40.0	1.0E+99	3.5E+01	110.00	-36.10	36.95	146.1	97.40
	WEST Side	GW8E	RM XO	1000	1.0	10.0	43.0	6.0E+00	1.0E+99	16.24	43.00	29.62	-26.8	-26.76
		GW3W	AT XO	1000	1.0	-40.0	43.0	3.5E+01	1.0E+99	-36.81	43.00	3.10	-79.8	-79.81
		GW7W	XS AT	1500	1.5	110.0	-40.0	1.0E+99	3.5E+01	110.00	-36.10	36.95	146.1	97.40
		GW8W	RM XO	1000	1.0	10.0	43.0	6.0E+00	1.0E+99	16.24	43.00	29.62	-26.8	-26.76
Pool Wall	E&W Side	PW10	RM RM	1000	1.0	10.0	10.0	6.0E+00	6.0E+00	10.00	10.00	10.00	0.0	0.00
		PW11	RM RM	2000	2.0	10.0	10.0	6.0E+00	6.0E+00	10.00	10.00	10.00	0.0	0.00
		PW19	BP RW	1300	1.3	44.0	110.0	1.0E+99	1.0E+99	44.00	110.00	77.00	-66.0	-50.77
	EAST Side	PW1E	RW DS	1300	1.3	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PW2E	PP PP	400	0.4	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PW4E	XI PP	1000	1.0	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PW6E	XI XS	1000	1.0	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PW7E	XO XI	2000	2.0	43.0	110.0	1.0E+99	1.0E+99	43.00	110.00	76.50	-67.0	-33.50
		PW8E	XI RM	1000	1.0	110.0	10.0	1.0E+99	6.0E+00	110.00	28.92	69.46	81.1	81.08
		PW9E	RM XS	2000	2.0	10.0	110.0	6.0E+00	1.0E+99	20.45	110.00	65.22	-89.6	-44.78
		PW12E	IP XI	1000	1.0	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PW13E	IP RM	1000	1.0	110.0	10.0	1.0E+99	6.0E+00	110.00	28.92	69.46	81.1	81.08
		PW14E	XI IP	470	0.5	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PW15E	XI IP	1000	1.0	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PW16E	PP IP	400	0.4	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PW17E	XO RM	1000	1.0	43.0	10.0	1.0E+99	6.0E+00	43.00	16.24	29.62	26.8	26.76
		PW18E	RM XS	1000	1.0	10.0	110.0	6.0E+00	1.0E+99	28.92	110.00	69.46	-81.1	-81.08
	WEST Side	PW1W	RW DS	1300	1.3	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PW2W	PP PP	400	0.4	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PW4W	XI PP	1000	1.0	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PW6W	XI XS	1000	1.0	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PW7W	XO XI	2000	2.0	43.0	110.0	1.0E+99	1.0E+99	43.00	110.00	76.50	-67.0	-33.50
		PW8W	XI RM	1000	1.0	110.0	10.0	1.0E+99	6.0E+00	110.00	28.92	69.46	81.1	81.08
		PW9W	RM XS	2000	2.0	10.0	110.0	6.0E+00	1.0E+99	20.45	110.00	65.22	-89.6	-44.78
		PW12W	IP XI	1000	1.0	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PW13W	IP RM	1000	1.0	110.0	10.0	1.0E+99	6.0E+00	110.00	28.92	69.46	81.1	81.08
		PW14W	XI IP	470	0.5	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PW15W	XI IP	1000	1.0	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PW16W	PP IP	400	0.4	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PW17W	XO RM	1000	1.0	43.0	10.0	1.0E+99	6.0E+00	43.00	16.24	29.62	26.8	26.76
		PW18W	RM XS	1000	1.0	10.0	110.0	6.0E+00	1.0E+99	28.92	110.00	69.46	-81.1	-81.08

*1: Refer to Figures E 3-1 and E 3-2 in Reference 2.1.2-e.

*2: Side

DW: Drywell

GP: GDSCS Pool

XI: Inner Expansion Pool

RM: Room

RW: Reactor Well

GR: Ground

WW: Wetwell

IP: IC Pool

XO: Outer Expansion Pool

DS: Equipment Storage Pool

FP: Spent Fuel Pool

AT: Outside Air

SP: Suppression Pool

PP: PCCS Pool

XS: Side Expansion Pool

BP: Buffer Pool

MT: MS Tunnel



HITACHI

WG3-U71-ERD-S-0004 SH NO. 132

REV. 2

of 543

**Table 6.2.3.4-20 Thermal Loads for Shell Elements,
LOCA After 72 hours: Winter (Case 2)**

Portion	Section ¹	Side ²		Thick. t		Temperature (°C)		Thin Film Coef. (kcal/m ² h°C)		Surface Temp. (°C)		Linearized Temp. (°C)		
		1	2	(mm)	(m)	T1	T2	h1	h2	Ts1	Ts2	Td	Tg	Tg/t
Floor Slab	E&W Side	SL1	RM RM	-	-	10.0	10.0	6.0E+00	6.0E+00	10.00	10.00	10.00	0.0	0.00
		SL4	RM BP	2400	2.4	10.0	0.0	6.0E+00	1.0E+99	9.11	0.00	4.56	9.1	3.80
	EAST Side	SL5	RM AT	1000	1.0	10.0	-40.0	6.0E+00	3.5E+01	0.84	-38.43	-18.80	39.3	39.27
		SL2E	IP RM	1000	1.0	60.0	10.0	1.0E+99	6.0E+00	60.00	19.46	39.73	40.5	40.54
		SL3E	RM XI	1500	1.5	10.0	0.0	6.0E+00	1.0E+99	8.65	0.00	4.33	8.7	5.77
		SL6E	XO AT	1000	1.0	0.0	-40.0	1.0E+99	3.5E+01	0.00	-38.46	-19.23	38.5	38.46
		SL9E	RM XO	1500	1.5	10.0	0.0	6.0E+00	1.0E+99	8.65	0.00	4.33	8.7	5.77
		SL10E	RM XS	1500	1.5	10.0	0.0	6.0E+00	1.0E+99	8.65	0.00	4.33	8.7	5.77
		SL11E	XS RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
		SL12E	PP RM	1000	1.0	100.0	10.0	1.0E+99	6.0E+00	100.00	27.03	63.51	73.0	72.97
	WEST Side	SL13E	XI RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
		SL2W	IP RM	1000	1.0	60.0	10.0	1.0E+99	6.0E+00	60.00	19.46	39.73	40.5	40.54
		SL3W	RM XI	1500	1.5	10.0	0.0	6.0E+00	1.0E+99	8.65	0.00	4.33	8.7	5.77
		SL6W	XO AT	1000	1.0	0.0	-40.0	1.0E+99	3.5E+01	0.00	-38.46	-19.23	38.5	38.46
		SL9W	RM XO	1500	1.5	10.0	0.0	6.0E+00	1.0E+99	8.65	0.00	4.33	8.7	5.77
		SL10W	RM XS	1500	1.5	10.0	0.0	6.0E+00	1.0E+99	8.65	0.00	4.33	8.7	5.77
		SL11W	XS RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
		SL12W	PP RM	1000	1.0	100.0	10.0	1.0E+99	6.0E+00	100.00	27.03	63.51	73.0	72.97
		SL13W	XI RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
MS Tunnel Slab	E&W Side	MT5	MT DS	2400	2.4	57.0	100.0	1.0E+99	1.0E+99	57.00	100.00	78.50	-43.0	-17.92
		MT8	MT AT	2400	2.4	57.0	-40.0	1.0E+99	3.5E+01	57.00	-38.41	9.30	95.4	39.75
		MT9	MT RM	2400	2.4	57.0	10.0	1.0E+99	6.0E+00	57.00	14.16	35.58	42.8	17.85
	EAST Side	MT6E	MT XS	2400	2.4	57.0	0.0	1.0E+99	1.0E+99	57.00	0.00	28.50	57.0	23.75
	WEST Side	MT6W	MT XS	2400	2.4	57.0	0.0	1.0E+99	1.0E+99	57.00	0.00	28.50	57.0	23.75
Top Slab	E&W Side	TS1	DW DS	2400	2.4	150.0	100.0	6.0E+00	1.0E+99	145.57	100.00	122.78	45.6	18.99
		TS4	DW RW	2400	2.4	150.0	100.0	6.0E+00	1.0E+99	145.57	100.00	122.78	45.6	18.99
		TS5	DW RM	2400	2.4	150.0	10.0	6.0E+00	6.0E+00	138.60	21.40	80.00	117.2	48.84
		TS7	DW BP	2400	2.4	150.0	0.0	6.0E+00	1.0E+99	136.71	0.00	68.35	136.7	56.96
	EAST Side	TS2E	DW IP	2400	2.4	150.0	60.0	6.0E+00	1.0E+99	142.03	60.00	101.01	82.0	34.18
		TS3E	DW XI	2400	2.4	150.0	0.0	6.0E+00	1.0E+99	136.71	0.00	68.35	136.7	56.96
	WEST Side	TS6E	DW PP	2400	2.4	150.0	100.0	6.0E+00	1.0E+99	145.57	100.00	122.78	45.6	18.99
		TS2W	DW IP	2400	2.4	150.0	60.0	6.0E+00	1.0E+99	142.03	60.00	101.01	82.0	34.18
Pool Girder	E&W Side	TS3W	DW XI	2400	2.4	150.0	0.0	6.0E+00	1.0E+99	136.71	0.00	68.35	136.7	56.96
		TS6W	DW PP	2400	2.4	150.0	100.0	6.0E+00	1.0E+99	145.57	100.00	122.78	45.6	18.99
	EAST Side	PG3	RM DS	1600	1.6	10.0	100.0	6.0E+00	1.0E+99	21.45	100.00	60.73	-78.5	-49.09
		PG7	RM BP	1600	1.6	10.0	0.0	6.0E+00	1.0E+99	8.73	0.00	4.36	8.7	5.45
		PG1E	PP RW	1600	1.6	100.0	100.0	1.0E+99	1.0E+99	100.00	100.00	100.00	0.0	0.00
		PG2E	XI BP	1600	1.6	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PG4E	IP DS	1600	1.6	60.0	100.0	1.0E+99	1.0E+99	60.00	100.00	80.00	-40.0	-25.00
		PG5E	PP DS	1600	1.6	100.0	100.0	1.0E+99	1.0E+99	100.00	100.00	100.00	0.0	0.00
		PG6E	IP BP	1600	1.6	60.0	0.0	1.0E+99	1.0E+99	60.00	0.00	30.00	60.0	37.50
		PG8E	XS DS	1600	1.6	0.0	100.0	1.0E+99	1.0E+99	0.00	100.00	50.00	-100.0	-62.50
		PG9E	PP BP	1600	1.6	100.0	0.0	1.0E+99	1.0E+99	100.00	0.00	50.00	100.0	62.50
	WEST Side	PG1W	PP RW	1600	1.6	100.0	100.0	1.0E+99	1.0E+99	100.00	100.00	100.00	0.0	0.00
		PG2W	XI BP	1600	1.6	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PG4W	IP DS	1600	1.6	60.0	100.0	1.0E+99	1.0E+99	60.00	100.00	80.00	-40.0	-25.00
		PG5W	PP DS	1600	1.6	100.0	100.0	1.0E+99	1.0E+99	100.00	100.00	100.00	0.0	0.00
		PG6W	IP BP	1600	1.6	60.0	0.0	1.0E+99	1.0E+99	60.00	0.00	30.00	60.0	37.50
		PG8W	XS DS	1600	1.6	0.0	100.0	1.0E+99	1.0E+99	0.00	100.00	50.00	-100.0	-62.50
		PG9W	PP BP	1600	1.6	100.0	0.0	1.0E+99	1.0E+99	100.00	0.00	50.00	100.0	62.50



HITACHI

WG3-U71-ERD-S-0004 SH NO. 133

REV. 2

of 543

**Table 6.2.3.4-20 Thermal Loads for Shell Elements,
LOCA After 72 hours: Winter (Case 2) (Continued)**

Portion	Section* ¹	Side* ²		Thick.		Temperature		Thin Film Coef.		Surface Temp.		Linearized Temp.		
		1	2	(mm)	(m)	T1	T2	h1	h2	Ts1	Ts2	Td	Tg	Tg/t
External Wall	E&W Side	GW1	AT RM	1500	1.5	-40.0	10.0	3.5E+01	6.0E+00	-38.87	3.42	-17.73	-42.3	-28.20
		GW5	AT BP	2440	2.4	-40.0	0.0	3.5E+01	1.0E+99	-39.35	0.00	-19.68	-39.4	-16.13
		GW6	DS AT	3500	3.5	100.0	-40.0	1.0E+99	3.5E+01	100.00	-38.42	30.79	138.4	39.55
		GW9	AT RM	1000	1.0	-40.0	10.0	3.5E+01	6.0E+00	-38.43	0.84	-18.80	-39.3	-39.27
		GW10	RM RM	1000	1.0	10.0	10.0	6.0E+00	6.0E+00	10.00	10.00	10.00	0.0	0.00
		GW11	AT BP	1500	1.5	-40.0	0.0	3.5E+01	1.0E+99	-38.96	0.00	-19.48	-39.0	-25.97
	EAST Side	GW3E	AT XO	1000	1.0	-40.0	0.0	3.5E+01	1.0E+99	-38.46	0.00	-19.23	-38.5	-38.46
		GW7E	XS AT	1500	1.5	0.0	-40.0	1.0E+99	3.5E+01	0.00	-38.96	-19.48	39.0	25.97
		GW8E	RM XO	1000	1.0	10.0	0.0	6.0E+00	1.0E+99	8.11	0.00	4.05	8.1	8.11
	WEST Side	GW3W	AT XO	1000	1.0	-40.0	0.0	3.5E+01	1.0E+99	-38.46	0.00	-19.23	-38.5	-38.46
		GW7W	XS AT	1500	1.5	0.0	-40.0	1.0E+99	3.5E+01	0.00	-38.96	-19.48	39.0	25.97
		GW8W	RM XO	1000	1.0	10.0	0.0	6.0E+00	1.0E+99	8.11	0.00	4.05	8.1	8.11
Pool Wall	E&W Side	PW10	RM RM	1000	1.0	10.0	10.0	6.0E+00	6.0E+00	10.00	10.00	10.00	0.0	0.00
		PW11	RM RM	2000	2.0	10.0	10.0	6.0E+00	6.0E+00	10.00	10.00	10.00	0.0	0.00
		PW19	BP RW	1300	1.3	0.0	100.0	1.0E+99	1.0E+99	0.00	100.00	50.00	-100.0	-76.92
	EAST Side	PW1E	RW DS	1300	1.3	100.0	100.0	1.0E+99	1.0E+99	100.00	100.00	100.00	0.0	0.00
		PW2E	PP PP	400	0.4	100.0	100.0	1.0E+99	1.0E+99	100.00	100.00	100.00	0.0	0.00
		PW4E	XI PP	1000	1.0	0.0	100.0	1.0E+99	1.0E+99	0.00	100.00	50.00	-100.0	-100.00
		PW6E	XI XS	1000	1.0	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PW7E	XO XI	2000	2.0	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PW8E	XI RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
		PW9E	RM XS	2000	2.0	10.0	0.0	6.0E+00	1.0E+99	8.96	0.00	4.48	9.0	4.48
		PW12E	IP XI	1000	1.0	60.0	0.0	1.0E+99	1.0E+99	60.00	0.00	30.00	60.0	60.00
		PW13E	IP RM	1000	1.0	60.0	10.0	1.0E+99	6.0E+00	60.00	19.46	39.73	40.5	40.54
		PW14E	XI IP	470	0.5	0.0	60.0	1.0E+99	1.0E+99	0.00	60.00	30.00	-60.0	-127.66
		PW15E	XI IP	1000	1.0	0.0	60.0	1.0E+99	1.0E+99	0.00	60.00	30.00	-60.0	-60.00
		PW16E	PP IP	400	0.4	100.0	60.0	1.0E+99	1.0E+99	100.00	60.00	80.00	40.0	100.00
		PW17E	XO RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
		PW18E	RM XS	1000	1.0	10.0	0.0	6.0E+00	1.0E+99	8.11	0.00	4.05	8.1	8.11
	WEST Side	PW1W	RW DS	1300	1.3	100.0	100.0	1.0E+99	1.0E+99	100.00	100.00	100.00	0.0	0.00
		PW2W	PP PP	400	0.4	100.0	100.0	1.0E+99	1.0E+99	100.00	100.00	100.00	0.0	0.00
		PW4W	XI PP	1000	1.0	0.0	100.0	1.0E+99	1.0E+99	0.00	100.00	50.00	-100.0	-100.00
		PW6W	XI XS	1000	1.0	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PW7W	XO XI	2000	2.0	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PW8W	XI RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
		PW9W	RM XS	2000	2.0	10.0	0.0	6.0E+00	1.0E+99	8.96	0.00	4.48	9.0	4.48
		PW12W	IP XI	1000	1.0	60.0	0.0	1.0E+99	1.0E+99	60.00	0.00	30.00	60.0	60.00
		PW13W	IP RM	1000	1.0	60.0	10.0	1.0E+99	6.0E+00	60.00	19.46	39.73	40.5	40.54
		PW14W	XI IP	470	0.5	0.0	60.0	1.0E+99	1.0E+99	0.00	60.00	30.00	-60.0	-127.66
		PW15W	XI IP	1000	1.0	0.0	60.0	1.0E+99	1.0E+99	0.00	60.00	30.00	-60.0	-60.00
		PW16W	PP IP	400	0.4	100.0	60.0	1.0E+99	1.0E+99	100.00	60.00	80.00	40.0	100.00
		PW17W	XO RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
		PW18W	RM XS	1000	1.0	10.0	0.0	6.0E+00	1.0E+99	8.11	0.00	4.05	8.1	8.11

*1: Refer to Figures E 3-1 and E 3-2 in Reference 2.1.2-e.

*2: Side

DW: Drywell

GP: GDCS Pool

XI: Inner Expansion Pool

RM: Room

RW: Reactor Well

GR: Ground

WW: Wetwell

IP: IC Pool

XO: Outer Expansion Pool

DS: Equipment Storage Pool

FP: Spent Fuel Pool

AT: Outside Air

SP: Suppression Pool

PP: PCCS Pool

XS: Side Expansion Pool

BP: Buffer Pool

MT: MS Tunnel



HITACHI

WG3-U71-ERD-S-0004 SH NO. 134

REV. 2

of 543

Table 6.2.3.4-21 Thermal Loads for Shell Elements,
LOCA After 72 hours: Winter (Case 3)

Portion	Section*1	Side*2		Thick. t		Temperature (°C)		Thin Film Coef. (kcal/m ² h°C)		Surface Temp. (°C)		Linearized Temp. (°C)		
		1	2	(mm)	(m)	T1	T2	h1	h2	Ts1	Ts2	Td	Tg	Tg/t
Floor Slab	E&W Side	SL1	RM RM	-	-	10.0	10.0	6.0E+00	6.0E+00	10.00	10.00	10.00	0.0	0.00
		SL4	RM BP	2400	2.4	10.0	0.0	6.0E+00	1.0E+99	9.11	0.00	4.56	9.1	3.80
		SL5	RM AT	1000	1.0	10.0	-40.0	6.0E+00	3.5E+01	0.84	-38.43	-18.80	39.3	39.27
	EAST Side	SL2E	IP RM	1000	1.0	60.0	10.0	1.0E+99	6.0E+00	60.00	19.46	39.73	40.5	40.54
		SL3E	RM XI	1500	1.5	10.0	110.0	6.0E+00	1.0E+99	23.46	110.00	66.73	-86.5	-57.69
		SL6E	XO AT	1000	1.0	0.0	-40.0	1.0E+99	3.5E+01	0.00	-38.46	-19.23	38.5	38.46
		SL9E	RM XO	1500	1.5	10.0	0.0	6.0E+00	1.0E+99	8.65	0.00	4.33	8.7	5.77
		SL10E	RM XS	1500	1.5	10.0	0.0	6.0E+00	1.0E+99	8.65	0.00	4.33	8.7	5.77
		SL11E	XS RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
		SL12E	PP RM	1000	1.0	100.0	10.0	1.0E+99	6.0E+00	100.00	27.03	63.51	73.0	72.97
		SL13E	XI RM	1000	1.0	110.0	10.0	1.0E+99	6.0E+00	110.00	28.92	69.46	81.1	81.08
	WEST Side	SL2W	IP RM	1000	1.0	60.0	10.0	1.0E+99	6.0E+00	60.00	19.46	39.73	40.5	40.54
		SL3W	RM XI	1500	1.5	10.0	110.0	6.0E+00	1.0E+99	23.46	110.00	66.73	-86.5	-57.69
		SL6W	XO AT	1000	1.0	0.0	-40.0	1.0E+99	3.5E+01	0.00	-38.46	-19.23	38.5	38.46
		SL9W	RM XO	1500	1.5	10.0	0.0	6.0E+00	1.0E+99	8.65	0.00	4.33	8.7	5.77
		SL10W	RM XS	1500	1.5	10.0	0.0	6.0E+00	1.0E+99	8.65	0.00	4.33	8.7	5.77
		SL11W	XS RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
		SL12W	PP RM	1000	1.0	100.0	10.0	1.0E+99	6.0E+00	100.00	27.03	63.51	73.0	72.97
		SL13W	XI RM	1000	1.0	110.0	10.0	1.0E+99	6.0E+00	110.00	28.92	69.46	81.1	81.08
MS Tunnel	E&W Side	MT5	MT DS	2400	2.4	57.0	110.0	1.0E+99	1.0E+99	57.00	110.00	83.50	-53.0	-22.08
		MT8	MT AT	2400	2.4	57.0	-40.0	1.0E+99	3.5E+01	57.00	-38.41	9.30	95.4	39.75
		MT9	MT RM	2400	2.4	57.0	10.0	1.0E+99	6.0E+00	57.00	14.16	35.58	42.8	17.85
	EAST Side	MT6E	MT XS	2400	2.4	57.0	0.0	1.0E+99	1.0E+99	57.00	0.00	28.50	57.0	23.75
	WEST Side	MT6W	MT XS	2400	2.4	57.0	0.0	1.0E+99	1.0E+99	57.00	0.00	28.50	57.0	23.75
Top Slab	E&W Side	TS1	DW DS	2400	2.4	150.0	110.0	6.0E+00	1.0E+99	146.46	110.00	128.23	36.5	15.19
		TS4	DW RW	2400	2.4	150.0	110.0	6.0E+00	1.0E+99	146.46	110.00	128.23	36.5	15.19
		TS5	DW RM	2400	2.4	150.0	10.0	6.0E+00	6.0E+00	138.60	21.40	80.00	117.2	48.84
		TS7	DW BP	2400	2.4	150.0	0.0	6.0E+00	1.0E+99	136.71	0.00	68.35	136.7	56.96
	EAST Side	TS2E	DW IP	2400	2.4	150.0	60.0	6.0E+00	1.0E+99	142.03	60.00	101.01	82.0	34.18
		TS3E	DW XI	2400	2.4	150.0	110.0	6.0E+00	1.0E+99	146.46	110.00	128.23	36.5	15.19
		TS6E	DW PP	2400	2.4	150.0	100.0	6.0E+00	1.0E+99	145.57	100.00	122.78	45.6	18.99
	WEST Side	TS2W	DW IP	2400	2.4	150.0	60.0	6.0E+00	1.0E+99	142.03	60.00	101.01	82.0	34.18
		TS3W	DW XI	2400	2.4	150.0	110.0	6.0E+00	1.0E+99	146.46	110.00	128.23	36.5	15.19
Pool Girder	E&W Side	PG3	RM DS	1600	1.6	10.0	110.0	6.0E+00	1.0E+99	22.73	110.00	66.36	-87.3	-54.55
		PG7	RM BP	1600	1.6	10.0	0.0	6.0E+00	1.0E+99	8.73	0.00	4.36	8.7	5.45
	EAST Side	PG1E	PP RW	1600	1.6	100.0	110.0	1.0E+99	1.0E+99	100.00	110.00	105.00	-10.0	-6.25
		PG2E	XI BP	1600	1.6	110.0	0.0	1.0E+99	1.0E+99	110.00	0.00	55.00	110.0	68.75
		PG4E	IP DS	1600	1.6	60.0	110.0	1.0E+99	1.0E+99	60.00	110.00	85.00	-50.0	-31.25
		PG5E	PP DS	1600	1.6	100.0	110.0	1.0E+99	1.0E+99	100.00	110.00	105.00	-10.0	-6.25
		PG6E	IP BP	1600	1.6	60.0	0.0	1.0E+99	1.0E+99	60.00	0.00	30.00	60.0	37.50
		PG8E	XS DS	1600	1.6	0.0	110.0	1.0E+99	1.0E+99	0.00	110.00	55.00	-110.0	-68.75
		PG9E	PP BP	1600	1.6	100.0	0.0	1.0E+99	1.0E+99	100.00	0.00	50.00	100.0	62.50
	WEST Side	PG1W	PP RW	1600	1.6	100.0	110.0	1.0E+99	1.0E+99	100.00	110.00	105.00	-10.0	-6.25
		PG2W	XI BP	1600	1.6	110.0	0.0	1.0E+99	1.0E+99	110.00	0.00	55.00	110.0	68.75
		PG4W	IP DS	1600	1.6	60.0	110.0	1.0E+99	1.0E+99	60.00	110.00	85.00	-50.0	-31.25
		PG5W	PP DS	1600	1.6	100.0	110.0	1.0E+99	1.0E+99	100.00	110.00	105.00	-10.0	-6.25
		PG6W	IP BP	1600	1.6	60.0	0.0	1.0E+99	1.0E+99	60.00	0.00	30.00	60.0	37.50
		PG8W	XS DS	1600	1.6	0.0	110.0	1.0E+99	1.0E+99	0.00	110.00	55.00	-110.0	-68.75
		PG9W	PP BP	1600	1.6	100.0	0.0	1.0E+99	1.0E+99	100.00	0.00	50.00	100.0	62.50



HITACHI

WG3-U71-ERD-S-0004 SH NO. 135

REV. 2

of 543

**Table 6.2.3.4-21 Thermal Loads for Shell Elements,
LOCA After 72 hours: Winter (Case 3) (Continued)**

Portion	Section ^{*1}	Side ^{*2}		Thick. t		Temperature (°C)		Thin Film Coef. (kcal/m ² h°C)		Surface Temp. (°C)		Linearized Temp. (°C)		
		1	2	(mm)	(m)	T1	T2	h1	h2	Ts1	Ts2	Td	Tg	Tg/t
External Wall	E&W Side	GW1	AT RM	1500	1.5	-40.0	10.0	3.5E+01	6.0E+00	-38.87	3.42	-17.73	-42.3	-28.20
		GW5	AT BP	2440	2.4	-40.0	0.0	3.5E+01	1.0E+99	-39.35	0.00	-19.68	-39.4	-16.13
		GW6	DS AT	3500	3.5	110.0	-40.0	1.0E+99	3.5E+01	110.00	-38.31	35.85	148.3	42.37
		GW9	AT RM	1000	1.0	-40.0	10.0	3.5E+01	6.0E+00	-38.43	0.84	-18.80	-39.3	-39.27
		GW10	RM RM	1000	1.0	10.0	10.0	6.0E+00	6.0E+00	10.00	10.00	10.00	0.0	0.00
	EAST Side	GW11	AT BP	1500	1.5	-40.0	0.0	3.5E+01	1.0E+99	-38.96	0.00	-19.48	-39.0	-25.97
		GW3E	AT XO	1000	1.0	-40.0	0.0	3.5E+01	1.0E+99	-38.46	0.00	-19.23	-38.5	-38.46
		GW7E	XS AT	1500	1.5	0.0	-40.0	1.0E+99	3.5E+01	0.00	-38.96	-19.48	39.0	25.97
	WEST Side	GW8E	RM XO	1000	1.0	10.0	0.0	6.0E+00	1.0E+99	8.11	0.00	4.05	8.1	8.11
		GW3W	AT XO	1000	1.0	-40.0	0.0	3.5E+01	1.0E+99	-38.46	0.00	-19.23	-38.5	-38.46
		GW7W	XS AT	1500	1.5	0.0	-40.0	1.0E+99	3.5E+01	0.00	-38.96	-19.48	39.0	25.97
		GW8W	RM XO	1000	1.0	10.0	0.0	6.0E+00	1.0E+99	8.11	0.00	4.05	8.1	8.11
Pool Wall	E&W Side	PW10	RM RM	1000	1.0	10.0	10.0	6.0E+00	6.0E+00	10.00	10.00	10.00	0.0	0.00
		PW11	RM RM	2000	2.0	10.0	10.0	6.0E+00	6.0E+00	10.00	10.00	10.00	0.0	0.00
		PW19	BP RW	1300	1.3	0.0	110.0	1.0E+99	1.0E+99	0.00	110.00	55.00	-110.0	-84.62
	EAST Side	PW1E	RW DS	1300	1.3	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PW2E	PP PP	400	0.4	100.0	100.0	1.0E+99	1.0E+99	100.00	100.00	100.00	0.0	0.00
		PW4E	XI PP	1000	1.0	110.0	100.0	1.0E+99	1.0E+99	110.00	100.00	105.00	10.0	10.00
		PW6E	XI XS	1000	1.0	110.0	0.0	1.0E+99	1.0E+99	110.00	0.00	55.00	110.0	110.00
		PW7E	XO XI	2000	2.0	0.0	110.0	1.0E+99	1.0E+99	0.00	110.00	55.00	-110.0	-55.00
		PW8E	XI RM	1000	1.0	110.0	10.0	1.0E+99	6.0E+00	110.00	28.92	69.46	81.1	81.08
		PW9E	RM XS	2000	2.0	10.0	0.0	6.0E+00	1.0E+99	8.96	0.00	4.48	9.0	4.48
		PW12E	IP XI	1000	1.0	60.0	110.0	1.0E+99	1.0E+99	60.00	110.00	85.00	-50.0	-50.00
		PW13E	IP RM	1000	1.0	60.0	10.0	1.0E+99	6.0E+00	60.00	19.46	39.73	40.5	40.54
		PW14E	XI IP	470	0.5	110.0	60.0	1.0E+99	1.0E+99	110.00	60.00	85.00	50.0	106.38
		PW15E	XI IP	1000	1.0	110.0	60.0	1.0E+99	1.0E+99	110.00	60.00	85.00	50.0	50.00
		PW16E	PP IP	400	0.4	100.0	60.0	1.0E+99	1.0E+99	100.00	60.00	80.00	40.0	100.00
		PW17E	XO RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
		PW18E	RM XS	1000	1.0	10.0	0.0	6.0E+00	1.0E+99	8.11	0.00	4.05	8.1	8.11
	WEST Side	PW1W	RW DS	1300	1.3	110.0	110.0	1.0E+99	1.0E+99	110.00	110.00	110.00	0.0	0.00
		PW2W	PP PP	400	0.4	100.0	100.0	1.0E+99	1.0E+99	100.00	100.00	100.00	0.0	0.00
		PW4W	XI PP	1000	1.0	110.0	100.0	1.0E+99	1.0E+99	110.00	100.00	105.00	10.0	10.00
		PW6W	XI XS	1000	1.0	110.0	0.0	1.0E+99	1.0E+99	110.00	0.00	55.00	110.0	110.00
		PW7W	XO XI	2000	2.0	0.0	110.0	1.0E+99	1.0E+99	0.00	110.00	55.00	-110.0	-55.00
		PW8W	XI RM	1000	1.0	110.0	10.0	1.0E+99	6.0E+00	110.00	28.92	69.46	81.1	81.08
		PW9W	RM XS	2000	2.0	10.0	0.0	6.0E+00	1.0E+99	8.96	0.00	4.48	9.0	4.48
		PW12W	IP XI	1000	1.0	60.0	110.0	1.0E+99	1.0E+99	60.00	110.00	85.00	-50.0	-50.00
		PW13W	IP RM	1000	1.0	60.0	10.0	1.0E+99	6.0E+00	60.00	19.46	39.73	40.5	40.54
		PW14W	XI IP	470	0.5	110.0	60.0	1.0E+99	1.0E+99	110.00	60.00	85.00	50.0	106.38
		PW15W	XI IP	1000	1.0	110.0	60.0	1.0E+99	1.0E+99	110.00	60.00	85.00	50.0	50.00
		PW16W	PP IP	400	0.4	100.0	60.0	1.0E+99	1.0E+99	100.00	60.00	80.00	40.0	100.00
		PW17W	XO RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
		PW18W	RM XS	1000	1.0	10.0	0.0	6.0E+00	1.0E+99	8.11	0.00	4.05	8.1	8.11

*1: Refer to Figures E 3-1 and E 3-2 in Reference 2.1.2-e.

*2: Side

DW: Drywell

GP: GDCS Pool

XI: Inner Expansion Pool

RM: Room

RW: Reactor Well

GR: Ground

WW: Wetwell

IP: IC Pool

XO: Outer Expansion Pool

DS: Equipment Storage Pool

FP: Spent Fuel Pool

AT: Outside Air

SP: Suppression Pool

PP: PCCS Pool

XS: Side Expansion Pool

BP: Buffer Pool

MT: MS Tunnel



HITACHI

WG3-U71-ERD-S-0004 SH NO. 136

REV. 2

of 543

Table 6.2.3.4-22 Thermal Loads for Shell Elements,
LOCA After 72 hours: Winter (Case 4)

Portion	Section ^{*1}	Side ^{*2}		Thick. t		Temperature (°C)		Thin Film Coef. (kcal/m ² h°C)		Surface Temp. (°C)		Linearized Temp. (°C)		
		1	2	(mm)	(m)	T1	T2	h1	h2	Ts1	Ts2	Td	Tg	Tg/t
Floor Slab	E&W Side	SL1	RM RM	-	-	10.0	10.0	6.0E+00	6.0E+00	10.00	10.00	10.00	0.0	0.00
		SL4	RM BP	2400	2.4	10.0	0.0	6.0E+00	1.0E+99	9.11	0.00	4.56	9.1	3.80
		SL5	RM AT	1000	1.0	10.0	-40.0	6.0E+00	3.5E+01	0.84	-38.43	-18.80	39.3	39.27
	EAST Side	SL2E	IP RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
		SL3E	RM XI	1500	1.5	10.0	0.0	6.0E+00	1.0E+99	8.65	0.00	4.33	8.7	5.77
		SL6E	XO AT	1000	1.0	0.0	-40.0	1.0E+99	3.5E+01	0.00	-38.46	-19.23	38.5	38.46
		SL9E	RM XO	1500	1.5	10.0	0.0	6.0E+00	1.0E+99	8.65	0.00	4.33	8.7	5.77
		SL10E	RM XS	1500	1.5	10.0	0.0	6.0E+00	1.0E+99	8.65	0.00	4.33	8.7	5.77
		SL11E	XS RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
		SL12E	PP RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
		SL13E	XI RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
	WEST Side	SL2W	IP RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
		SL3W	RM XI	1500	1.5	10.0	0.0	6.0E+00	1.0E+99	8.65	0.00	4.33	8.7	5.77
		SL6W	XO AT	1000	1.0	0.0	-40.0	1.0E+99	3.5E+01	0.00	-38.46	-19.23	38.5	38.46
		SL9W	RM XO	1500	1.5	10.0	0.0	6.0E+00	1.0E+99	8.65	0.00	4.33	8.7	5.77
		SL10W	RM XS	1500	1.5	10.0	0.0	6.0E+00	1.0E+99	8.65	0.00	4.33	8.7	5.77
		SL11W	XS RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
		SL12W	PP RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
		SL13W	XI RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
MS Tunnel	E&W Side	MT5	MT DS	2400	2.4	57.0	0.0	1.0E+99	1.0E+99	57.00	0.00	28.50	57.0	23.75
		MT8	MT AT	2400	2.4	57.0	-40.0	1.0E+99	3.5E+01	57.00	-38.41	9.30	95.4	39.75
		MT9	MT RM	2400	2.4	57.0	10.0	1.0E+99	6.0E+00	57.00	14.16	35.58	42.8	17.85
	EAST Side	MT6E	MT XS	2400	2.4	57.0	0.0	1.0E+99	1.0E+99	57.00	0.00	28.50	57.0	23.75
	WEST Side	MT6W	MT XS	2400	2.4	57.0	0.0	1.0E+99	1.0E+99	57.00	0.00	28.50	57.0	23.75
Top Slab	E&W Side	TS1	DW DS	2400	2.4	150.0	0.0	6.0E+00	1.0E+99	136.71	0.00	68.35	136.7	56.96
		TS4	DW RW	2400	2.4	150.0	0.0	6.0E+00	1.0E+99	136.71	0.00	68.35	136.7	56.96
		TS5	DW RM	2400	2.4	150.0	10.0	6.0E+00	6.0E+00	138.60	21.40	80.00	117.2	48.84
		TS7	DW BP	2400	2.4	150.0	0.0	6.0E+00	1.0E+99	136.71	0.00	68.35	136.7	56.96
	EAST Side	TS2E	DW IP	2400	2.4	150.0	0.0	6.0E+00	1.0E+99	136.71	0.00	68.35	136.7	56.96
		TS3E	DW XI	2400	2.4	150.0	0.0	6.0E+00	1.0E+99	136.71	0.00	68.35	136.7	56.96
		TS6E	DW PP	2400	2.4	150.0	0.0	6.0E+00	1.0E+99	136.71	0.00	68.35	136.7	56.96
	WEST Side	TS2W	DW IP	2400	2.4	150.0	0.0	6.0E+00	1.0E+99	136.71	0.00	68.35	136.7	56.96
		TS3W	DW XI	2400	2.4	150.0	0.0	6.0E+00	1.0E+99	136.71	0.00	68.35	136.7	56.96
		TS6W	DW PP	2400	2.4	150.0	0.0	6.0E+00	1.0E+99	136.71	0.00	68.35	136.7	56.96
Pool Girder	E&W Side	PG3	RM DS	1600	1.6	10.0	0.0	6.0E+00	1.0E+99	8.73	0.00	4.36	8.7	5.45
		PG7	RM BP	1600	1.6	10.0	0.0	6.0E+00	1.0E+99	8.73	0.00	4.36	8.7	5.45
	EAST Side	PG1E	PP RW	1600	1.6	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PG2E	XI BP	1600	1.6	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PG4E	IP DS	1600	1.6	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PG5E	PP DS	1600	1.6	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PG6E	IP BP	1600	1.6	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PG8E	XS DS	1600	1.6	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PG9E	PP BP	1600	1.6	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
	WEST Side	PG1W	PP RW	1600	1.6	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PG2W	XI BP	1600	1.6	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PG4W	IP DS	1600	1.6	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PG5W	PP DS	1600	1.6	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PG6W	IP BP	1600	1.6	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PG8W	XS DS	1600	1.6	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PG9W	PP BP	1600	1.6	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00



HITACHI

WG3-U71-ERD-S-0004 SH NO. 137

REV. 2

of 543

**Table 6.2.3.4-22 Thermal Loads for Shell Elements,
LOCA After 72 hours: Winter (Case 4) (Continued)**

Portion	Section ^{*1}	Side ^{*2}		Thick. t		Temperature (°C)		Thin Film Coef. (kcal/m ² h°C)		Surface Temp. (°C)		Linearized Temp. (°C)		
		1	2	(mm)	(m)	T1	T2	h1	h2	Ts1	Ts2	Td	Tg	Tg/t
External Wall	E&W Side	GW1	AT RM	1500	1.5	-40.0	10.0	3.5E+01	6.0E+00	-38.87	3.42	-17.73	-42.3	-28.20
		GW5	AT BP	2440	2.4	-40.0	0.0	3.5E+01	1.0E+99	-39.35	0.00	-19.68	-39.4	-16.13
		GW6	DS AT	3500	3.5	0.0	-40.0	1.0E+99	3.5E+01	0.00	-39.55	-19.77	39.5	11.30
		GW9	AT RM	1000	1.0	-40.0	10.0	3.5E+01	6.0E+00	-38.43	0.84	-18.80	-39.3	-39.27
		GW10	RM RM	1000	1.0	10.0	10.0	6.0E+00	6.0E+00	10.00	10.00	10.00	0.0	0.00
		GW11	AT BP	1500	1.5	-40.0	0.0	3.5E+01	1.0E+99	-38.96	0.00	-19.48	-39.0	-25.97
	EAST Side	GW3E	AT XO	1000	1.0	-40.0	0.0	3.5E+01	1.0E+99	-38.46	0.00	-19.23	-38.5	-38.46
		GW7E	XS AT	1500	1.5	0.0	-40.0	1.0E+99	3.5E+01	0.00	-38.96	-19.48	39.0	25.97
		GW8E	RM XO	1000	1.0	10.0	0.0	6.0E+00	1.0E+99	8.11	0.00	4.05	8.1	8.11
	WEST Side	GW3W	AT XO	1000	1.0	-40.0	0.0	3.5E+01	1.0E+99	-38.46	0.00	-19.23	-38.5	-38.46
		GW7W	XS AT	1500	1.5	0.0	-40.0	1.0E+99	3.5E+01	0.00	-38.96	-19.48	39.0	25.97
		GW8W	RM XO	1000	1.0	10.0	0.0	6.0E+00	1.0E+99	8.11	0.00	4.05	8.1	8.11
Pool Wall	E&W Side	PW10	RM RM	1000	1.0	10.0	10.0	6.0E+00	6.0E+00	10.00	10.00	10.00	0.0	0.00
		PW11	RM RM	2000	2.0	10.0	10.0	6.0E+00	6.0E+00	10.00	10.00	10.00	0.0	0.00
		PW19	BP RW	1300	1.3	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
	EAST Side	PW1E	RW DS	1300	1.3	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PW2E	PP PP	400	0.4	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PW4E	XI PP	1000	1.0	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PW6E	XI XS	1000	1.0	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PW7E	XO XI	2000	2.0	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PW8E	XI RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
		PW9E	RM XS	2000	2.0	10.0	0.0	6.0E+00	1.0E+99	8.96	0.00	4.48	9.0	4.48
		PW12E	IP XI	1000	1.0	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PW13E	IP RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
		PW14E	XI IP	470	0.5	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PW15E	XI IP	1000	1.0	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PW16E	PP IP	400	0.4	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PW17E	XO RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
		PW18E	RM XS	1000	1.0	10.0	0.0	6.0E+00	1.0E+99	8.11	0.00	4.05	8.1	8.11
	WEST Side	PW1W	RW DS	1300	1.3	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PW2W	PP PP	400	0.4	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PW4W	XI PP	1000	1.0	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PW6W	XI XS	1000	1.0	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PW7W	XO XI	2000	2.0	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PW8W	XI RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
		PW9W	RM XS	2000	2.0	10.0	0.0	6.0E+00	1.0E+99	8.96	0.00	4.48	9.0	4.48
		PW12W	IP XI	1000	1.0	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PW13W	IP RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
		PW14W	XI IP	470	0.5	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PW15W	XI IP	1000	1.0	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PW16W	PP IP	400	0.4	0.0	0.0	1.0E+99	1.0E+99	0.00	0.00	0.00	0.0	0.00
		PW17W	XO RM	1000	1.0	0.0	10.0	1.0E+99	6.0E+00	0.00	8.11	4.05	-8.1	-8.11
		PW18W	RM XS	1000	1.0	10.0	0.0	6.0E+00	1.0E+99	8.11	0.00	4.05	8.1	8.11

*1: Refer to Figures E 3-1 and E 3-2 in Reference 2.1.2-e.

*2: Boundary

DW: Drywell

GP: GDACS Pool

XI: Inner Expansion Pool

RM: Room

RW: Reactor Well

GR: Ground

WW: Wetwell

IP: IC Pool

XO: Outer Expansion Pool

DS: Equipment Storage Pool

FP: Spent Fuel Pool

AT: Outside Air

SP: Suppression Pool

PP: PCCS Pool

XS: Side Expansion Pool

BP: Buffer Pool

MT: MS Tunnel



Table 6.2.3.7-1 Design Wind Loads (North Wind)

FL	EL	RB (MPa)					EL	FB (MPa)			
		Wall				Roof		Wall			Roof
		N	S	E	W			S	E	W	
Roof ~ 6FL	34000 ~ 52400 ^{*1}	0.0031	-0.0022	-0.0028	-0.0028	-0.0039					
6FL ~ 5FL	27000 ~ 34000	0.0029	-0.0022	-0.0028	-0.0028	-0.0039					
5FL ~ 4FL ^{*2}	17500 ~ 27000	0.0028	-0.0022	-0.0028	-0.0028		17500 ~ 22500	-0.0022	-0.0028	-0.0028	-0.0039
4FL ~ 3FL	13570 ~ 17500	0.0026		-0.0028	-0.0028		13570 ~ 17500	-0.0022	-0.0028	-0.0028	
3FL ~ 2FL	9060 ~ 13570	0.0025		-0.0028	-0.0028		9060 ~ 13570	-0.0022	-0.0028	-0.0028	
2FL ~ 1FL	4650 ~ 9060	0.0023		-0.0028	-0.0028		4650 ~ 9060	-0.0022	-0.0028	-0.0028	

Note

*1: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.

*2: For RB South wall from EL 22500 to EL 27000.

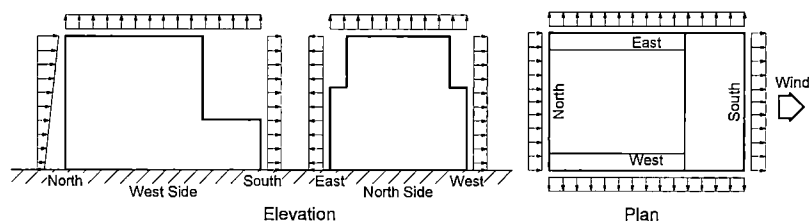


Table 6.2.3.7-2 Design Wind Loads (South Wind)

FL	EL	RB (MPa)					EL	FB (MPa)			
		Wall				Roof		Wall			Roof
		N	S	E	W			S	E	W	
Roof ~ 6FL	34000 ~ 52400 ^{*1}	-0.0022	0.0031	-0.0028	-0.0028	-0.0039					
6FL ~ 5FL	27000 ~ 34000	-0.0022	0.0029	-0.0028	-0.0028	-0.0039					
5FL ~ 4FL ^{*2}	17500 ~ 27000	-0.0022	0.0028	-0.0028	-0.0028		17500 ~ 22500	0.0027	-0.0028	-0.0028	-0.0039
4FL ~ 3FL	13570 ~ 17500	-0.0022		-0.0028	-0.0028		13570 ~ 17500	0.0026	-0.0028	-0.0028	
3FL ~ 2FL	9060 ~ 13570	-0.0022		-0.0028	-0.0028		9060 ~ 13570	0.0025	-0.0028	-0.0028	
2FL ~ 1FL	4650 ~ 9060	-0.0022		-0.0028	-0.0028		4650 ~ 9060	0.0023	-0.0028	-0.0028	

Note

*1: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.

*2: For RB South wall from EL 22500 to EL 27000.

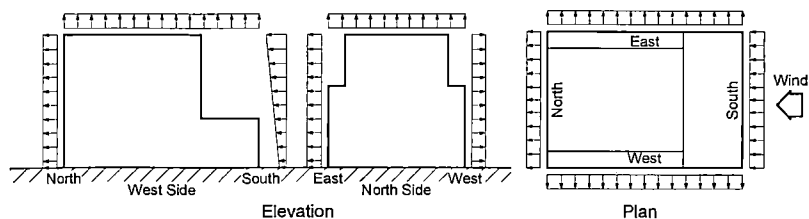




Table 6.2.3.7-3 Design Wind Loads (East Wind)

FL	EL	RB (MPa)					EL	FB (MPa)			
		Wall				Roof		Wall			Roof
		N	S	E	W			S	E	W	
Roof ~ 6FL	34000 ~ 52400 ^{*1}	-0.0028	-0.0028	0.0031	-0.0022	-0.0039	17500 ~ 22500 13570 ~ 17500 9060 ~ 13570 4650 ~ 9060	-0.0028	0.0027	-0.0022	-0.0039
6FL ~ 5FL	27000 ~ 34000	-0.0028	-0.0028	0.0029	-0.0022	-0.0039					
5FL ~ 4FL ^{*2}	17500 ~ 27000	-0.0028	-0.0028	0.0028	-0.0022						
4FL ~ 3FL	13570 ~ 17500	-0.0028		0.0026	-0.0022						
3FL ~ 2FL	9060 ~ 13570	-0.0028		0.0025	-0.0022						
2FL ~ 1FL	4650 ~ 9060	-0.0028		0.0023	-0.0022						

Note

*1: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.

*2: For RB South wall from EL 22500 to EL 27000.

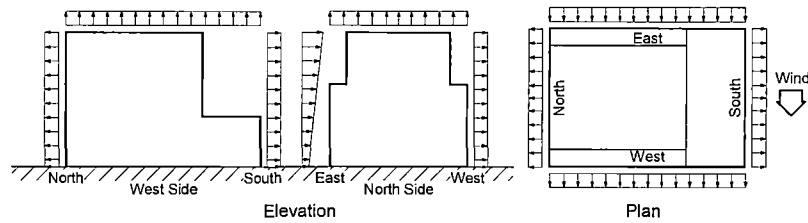


Table 6.2.3.7-4 Design Wind Loads (West Wind)

FL	EL	RB (MPa)					EL	FB (MPa)			
		Wall				Roof		Wall			Roof
		N	S	E	W			S	E	W	
Roof ~ 6FL	34000 ~ 52400 ^{*1}	-0.0028	-0.0028	-0.0022	0.0031	-0.0039	17500 ~ 22500 13570 ~ 17500 9060 ~ 13570 4650 ~ 9060	-0.0028	-0.0022	0.0027	-0.0039
6FL ~ 5FL	27000 ~ 34000	-0.0028	-0.0028	-0.0022	0.0029	-0.0039					
5FL ~ 4FL ^{*2}	17500 ~ 27000	-0.0028	-0.0028	-0.0022	0.0028						
4FL ~ 3FL	13570 ~ 17500	-0.0028		-0.0022	0.0026						
3FL ~ 2FL	9060 ~ 13570	-0.0028		-0.0022	0.0025						
2FL ~ 1FL	4650 ~ 9060	-0.0028		-0.0022	0.0023						

Note

*1: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.

*2: For RB South wall from EL 22500 to EL 27000.

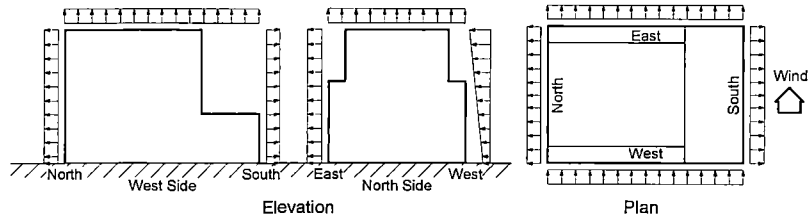




Table 6.2.3.8-1 Tornado Wind Loads (North Wind)

FL	EL	RB (MPa)					EL	FB (MPa)			
		Wall				Roof		Wall			Roof
		N	S	E	W			S	E	W	
Roof ~ 6FL	34000 ~ 52400 ^{*1}	0.0056	-0.0035	-0.0049	-0.0049	-0.0073	17500 ~ 22500	-0.0035	-0.0049	-0.0049	-0.0073
6FL ~ 5FL	27000 ~ 34000	0.0056	-0.0035	-0.0049	-0.0049	-0.0073					
5FL ~ 4FL ^{*2}	17500 ~ 27000	0.0056	-0.0035	-0.0049	-0.0049						
4FL ~ 3FL	13570 ~ 17500	0.0056		-0.0049	-0.0049	13570 ~ 17500					
3FL ~ 2FL	9060 ~ 13570	0.0056		-0.0049	-0.0049	9060 ~ 13570					
2FL ~ 1FL	4650 ~ 9060	0.0056		-0.0049	-0.0049	4650 ~ 9060	-0.0035	-0.0049	-0.0049		

Note

*1: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.

*2: For RB South wall from EL 22500 to EL 27000.

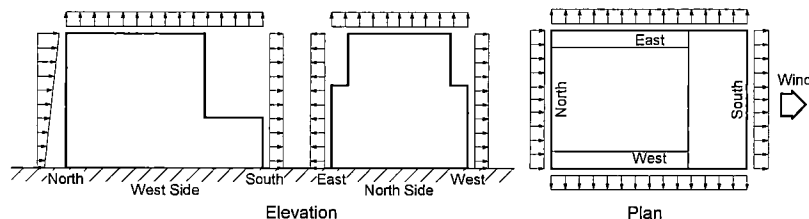



Table 6.2.3.8-2 Tornado Wind Loads (South Wind)

FL	EL	RB (MPa)					EL	FB (MPa)			
		Wall				Roof		Wall			Roof
		N	S	E	W			S	E	W	
Roof ~ 6FL	34000 ~ 52400 ^{*1}	-0.0035	0.0056	-0.0049	-0.0049	-0.0073	17500 ~ 22500	0.0056	-0.0049	-0.0049	-0.0073
6FL ~ 5FL	27000 ~ 34000	-0.0035	0.0056	-0.0049	-0.0049	-0.0073					
5FL ~ 4FL ^{*2}	17500 ~ 27000	-0.0035	0.0056	-0.0049	-0.0049						
4FL ~ 3FL	13570 ~ 17500	-0.0035		-0.0049	-0.0049	13570 ~ 17500					
3FL ~ 2FL	9060 ~ 13570	-0.0035		-0.0049	-0.0049	9060 ~ 13570					
2FL ~ 1FL	4650 ~ 9060	-0.0035		-0.0049	-0.0049	4650 ~ 9060	0.0056	-0.0049	-0.0049		

Note

*1: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.

*2: For RB South wall from EL 22500 to EL 27000.

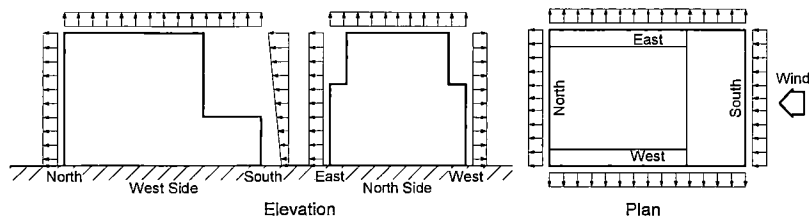



HITACHI

WG3-U71-ERD-S-0004 SH NO. 141
REV. 2 of 543

Table 6.2.3.8-3 Tornado Wind Loads (East Wind)

FL	EL	RB (MPa)					EL	FB (MPa)			
		Wall				Roof		Wall			Roof
		N	S	E	W			S	E	W	
Roof ~ 6FL	34000 ~ 52400 ^{*1}	-0.0049	-0.0049	0.0056	-0.0035	-0.0073					
6FL ~ 5FL	27000 ~ 34000	-0.0049	-0.0049	0.0056	-0.0035	-0.0073					
5FL ~ 4FL ^{*2}	17500 ~ 27000	-0.0049	-0.0049	0.0056	-0.0035		17500 ~ 22500	-0.0049	0.0056	-0.0035	-0.0073
4FL ~ 3FL	13570 ~ 17500	-0.0049		0.0056	-0.0035		13570 ~ 17500	-0.0049	0.0056	-0.0035	
3FL ~ 2FL	9060 ~ 13570	-0.0049		0.0056	-0.0035		9060 ~ 13570	-0.0049	0.0056	-0.0035	
2FL ~ 1FL	4650 ~ 9060	-0.0049		0.0056	-0.0035		4650 ~ 9060	-0.0049	0.0056	-0.0035	

Note

*1: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.

*2: For RB South wall from EL 22500 to EL 27000.

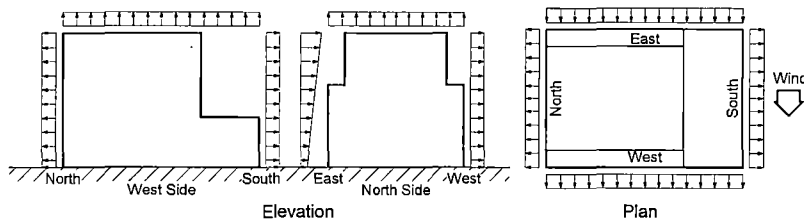



Table 6.2.3.8-4 Tornado Wind Loads (West Wind)

FL	EL	RB (MPa)					EL	FB (MPa)			
		Wall				Roof		Wall			Roof
		N	S	E	W			S	E	W	
Roof ~ 6FL	34000 ~ 52400 ^{*1}	-0.0049	-0.0049	-0.0035	0.0056	-0.0073					
6FL ~ 5FL	27000 ~ 34000	-0.0049	-0.0049	-0.0035	0.0056	-0.0073					
5FL ~ 4FL ^{*2}	17500 ~ 27000	-0.0049	-0.0049	-0.0035	0.0056		17500 ~ 22500	-0.0049	-0.0035	0.0056	-0.0073
4FL ~ 3FL	13570 ~ 17500	-0.0049		-0.0035	0.0056		13570 ~ 17500	-0.0049	-0.0035	0.0056	
3FL ~ 2FL	9060 ~ 13570	-0.0049		-0.0035	0.0056		9060 ~ 13570	-0.0049	-0.0035	0.0056	
2FL ~ 1FL	4650 ~ 9060	-0.0049		-0.0035	0.0056		4650 ~ 9060	-0.0049	-0.0035	0.0056	

Note

*1: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.

*2: For RB South wall from EL 22500 to EL 27000.

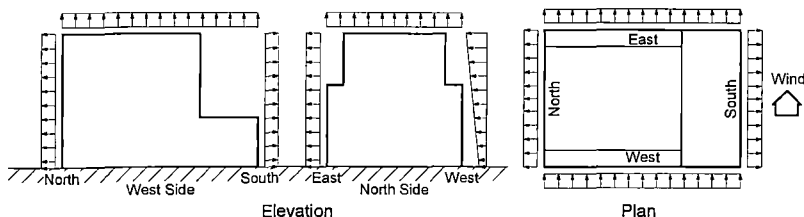



HITACHI

WG3-U71-ERD-S-0004 SH NO. 142

REV. 2

of 543

Table 6.2.3.8-5 Tornado Loads (Differential Pressure)

FL	EL	RB (MPa)					EL	FB (MPa)			
		Wall				Roof		Wall			Roof
		N	S	E	W			S	E	W	
Roof~ 6FL	34000 ~ 52400*1	0.0165	0.0165	0.0165	0.0165	0.0165					
6FL ~ 5FL	27000 ~ 34000	0.0165	0.0165	0.0165	0.0165						
5FL ~ 4FL*2	17500 ~ 27000	0.0165	0.0165	0.0165	0.0165		17500 ~ 22500	0.0165	0.0165	0.0165	0.0165
4FL ~ 3FL	13570 ~ 17500	0.0165		0.0165	0.0165		13570 ~ 17500	0.0165	0.0165	0.0165	
3FL ~ 2FL	9060 ~ 13570	0.0165		0.0165	0.0165		9060 ~ 13570	0.0165	0.0165	0.0165	
2FL ~ 1FL	4650 ~ 9060	0.0165		0.0165	0.0165		4650 ~ 9060	0.0165	0.0165	0.0165	

Note

*1: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.

*2: For RB South wall from EL 22500 to EL 27000.

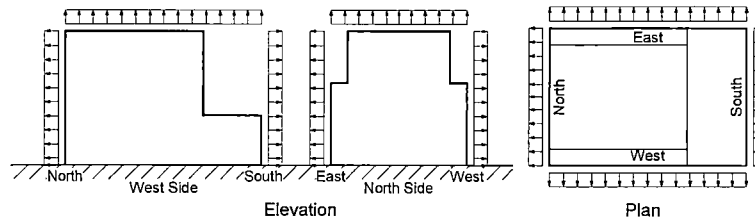




Table 6.2.3.9-1 Analysis Cases for Seismic Loads

Condition	Load	Load Label	Direction	Component
Normal Operation & LOCA	Horizontal Seismic Load	EQNS	North to South	Shear Force Overturning Moment
		EQEW	West to East	
	Vertical Seismic Load	EQZ	Downward	Vertical Force
	Torsional Seismic Load	EQT	Counterclockwise	Torsional Moment
	Soil Pressure Due to an Earthquake	SPKN	North to South and South to North at Once	Soil Pressure
		SPKW	West to East and East to West at Once	
	Seismic hydrodynamic Load	ESX	North to South	Seismic hydrodynamic Pressure
		ESY	West to East	
		ESZ	Downward	
LOCA Flooding	Horizontal Seismic Load	EQNF	North to South	Shear Force Overturning Moment
		EQEF	West to East	
	Vertical Seismic Load	EQZF	Downward	Vertical Force
	Torsional Seismic Load	EQTF	Counterclockwise	Torsional Moment
	Seismic hydrodynamic Load	ESXF	North to South	Seismic hydrodynamic Pressure
		ESYF	West to East	
		ESZF	Downward	
Envelope	Horizontal Seismic Load	EONS	North to South	Out-of-Plane force
	(Out-of-Plane load for walls)	EOEW	West to East	

Note: The seismic loads for normal operation & LOCA condition are the same seismic loads for a LOCA flooding condition.



HITACHI

WG3-U71-ERD-S-0004 SH NO. 144
REV. 2 of 543

Table 6.2.3.9-2 Seismic Wall Shear Area – X (N-S)-dir.

Elevation (m)	Seismic Wall Shear Area (m ²)												Total (m ²)
	RA	RG	RCCV	Pedestal	IW1	IW2	IW3	IW4	IW5	IW6	IW7	IW8	
52.40 ^{*1} 34.00	47.0	47.0	-	-	-	-	-	-	-	-	-	-	94.0
34.00 27.00	47.0	47.0	-	-	-	-	-	-	-	-	-	-	94.0
27.00 22.50	47.0	47.0	119.3	-	-	-	-	-	-	-	-	-	213.3
22.50 17.50	91.5	91.5	119.3	-	-	-	-	-	-	-	-	-	302.3
17.50 13.57	91.5	91.5	119.3	-	-	-	-	-	-	-	-	-	302.3
13.57 9.06	91.5	91.5	119.3	-	-	-	-	-	-	-	-	-	302.3
9.06 4.65	91.5	91.5	119.3	-	-	-	-	-	-	-	-	-	302.3
4.65 2.42	136.0	136.0	119.3	51.2	7.4	4.2	19.4	12.2	12.9	-	-	-	498.5
2.42 -1.00	136.0	136.0	119.3	51.2	7.4	4.2	19.4	12.2	12.9	-	-	-	498.5
-1.00 -2.75	136.0	136.0	119.3	51.2	7.4	4.2	19.4	12.2	10.4	-	-	-	496.0
-2.75 -6.40	136.0	136.0	119.3	51.2	7.4	4.2	19.4	12.2	10.4	-	-	-	496.0
-6.40 -11.50	136.0	136.0	119.3	51.2	7.4	3.2	19.4	12.2	12.9	10.1	12.0	12.0	531.5

Note

*1: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.
Locations of IW1 through IW8 are shown in Figures 6.2.3.9-3 through 6.2.3.9-5.



HITACHI

WG3-U71-ERD-S-0004 SH NO. 145
REV. 2 of 543

Table 6.2.3.9-3 Seismic Wall Shear Area – Y (E-W)-dir.

Elevation (m)	Seismic Wall Shear Area (m ²)														Total (m ²)
	R1	R7	F3	RCCV	Pedestal	IW1	IW2	IW3	IW4	IW5	IW6	IW7	IW8	IW9	
52.40 ^{*1} 34.00	38.0	38.0	-	-	-	-	-	-	-	-	-	-	-	-	76.0
34.00 27.00	75.2	75.2	-	-	-	-	-	-	-	-	-	-	-	-	150.4
27.00 22.50	70.5	70.5	-	119.3	-	-	-	-	-	-	-	-	-	-	260.3
22.50 17.50	43.5	70.5	47.0	119.3	-	-	-	-	-	-	-	-	-	-	280.3
17.50 13.57	70.5	70.5	47.0	119.3	-	-	-	-	-	-	-	-	-	-	307.3
13.57 9.06	70.5	70.5	47.0	119.3	-	-	-	-	-	-	-	-	-	-	307.3
9.06 4.65	70.5	70.5	47.0	119.3	-	-	-	-	-	-	-	-	-	-	307.3
4.65 2.42	94.0	94.0	94.0	119.3	51.2	31.5	4.1	2.8	-	-	-	-	-	-	491.0
2.42 -1.00	94.0	94.0	94.0	119.3	51.2	31.5	4.1	2.8	-	-	-	-	-	-	491.0
-1.00 -2.75	94.0	94.0	94.0	119.3	51.2	31.5	4.1	8.3	-	-	-	-	-	-	496.5
-2.75 -6.40	94.0	94.0	94.0	119.3	51.2	31.5	4.1	8.3	-	-	-	-	-	-	496.5
-6.40 -11.50	94.0	94.0	94.0	119.3	51.2	31.5	8.2	8.4	5.5	6.3	6.8	8.4	12.0	12.0	551.7

Note

*1: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.
Locations of IW1 through IW8 are shown in Figures 6.2.3.9-3 through 6.2.3.9-5.



HITACHI

WG3-U71-ERD-S-0004 SH NO. 146
REV. 2 of 543

Table 6.2.3.9-4 Applied Shear Forces at Seismic Wall – X (N-S)-dir.

Elevation (m)	Design Shear Force (MN)	Applied Force (MN)	Applied Forces at Each Seismic Wall (MN)											
			RA	RG	RCCV	Pedestal	IW1	IW2	IW3	IW4	IW5	IW6	IW7	IW8
52.40 ^{*1} 34.00	192.21	192.21	96.11	96.11	-	-	-	-	-	-	-	-	-	-
34.00 27.00	304.11	111.90	55.95	55.95	-	-	-	-	-	-	-	-	-	-
27.00 22.50	537.06	232.95	51.32	51.32	130.30	-	-	-	-	-	-	-	-	-
22.50 17.50	577.43	40.37	12.22	12.22	15.93	-	-	-	-	-	-	-	-	-
17.50 13.57	622.58	45.15	13.66	13.66	17.82	-	-	-	-	-	-	-	-	-
13.57 9.06	658.62	36.04	10.91	10.91	14.22	-	-	-	-	-	-	-	-	-
9.06 4.65	680.00	21.38	6.47	6.47	8.44	-	-	-	-	-	-	-	-	-
4.65 2.42	584.43	-95.58	-26.07	-26.07	-22.88	-9.82	-1.41	-0.81	-3.71	-2.33	-2.47	-	-	-
2.42 -1.00	595.94	11.51	3.14	3.14	2.75	1.18	0.17	0.10	0.45	0.28	0.30	-	-	-
-1.00 -2.75	329.76	-266.18	-72.98	-72.98	-64.03	-27.50	-3.94	-2.25	-10.38	-6.52	-5.58	-	-	-
-2.75 -6.40	329.40	-0.36	-0.10	-0.10	-0.09	-0.04	-0.01	0.00	-0.01	-0.01	-0.01	-	-	-
-6.40 -11.50	338.24	8.48	0.22	0.22	0.19	7.70	0.01	0.01	0.03	0.02	0.02	0.02	0.02	0.02
-11.50 -15.50	-	215.98												

Note

*1: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.
Locations of IW1 through IW8 are shown in Figures 6.2.3.9-3 through 6.2.3.9-5.



HITACHI

WG3-U71-ERD-S-0004 SH NO. 147
REV. 2 of 543

Table 6.2.3.9-5 Applied Shear Forces at Seismic Wall – Y(E-W)-dir.

Elevation (m)	Design Shear Force (MN)	Applied Force (MN)	Applied Forces at Each Seismic Wall (MN)													
			R1	R7	F3	RCCV	Pedestal	IW1	IW2	IW3	IW4	IW5	IW6	IW7	IW8	IW9
52.40 ^{*1} 34.00	139.97	139.97	69.98	69.98	-	-	-	-	-	-	-	-	-	-	-	-
34.00 27.00	247.18	107.22	53.61	53.61	-	-	-	-	-	-	-	-	-	-	-	-
27.00 22.50	411.28	164.10	44.44	44.44	0.00	75.22	-	-	-	-	-	-	-	-	-	-
22.50 17.50	443.71	32.43	5.03	8.16	5.44	13.80	-	-	-	-	-	-	-	-	-	-
17.50 13.57	501.87	58.16	13.34	13.34	8.89	22.58	-	-	-	-	-	-	-	-	-	-
13.57 9.06	537.18	35.31	8.10	8.10	5.40	13.71	-	-	-	-	-	-	-	-	-	-
9.06 4.65	584.54	47.36	10.87	10.87	7.24	18.39	-	-	-	-	-	-	-	-	-	-
4.65 2.42	502.70	-81.84	-15.67	-15.67	-15.67	-19.89	-8.54	-5.26	-0.68	-0.46	-	-	-	-	-	-
2.42 -1.00	517.20	14.50	2.78	2.78	2.78	3.52	1.51	0.93	0.12	0.08	-	-	-	-	-	-
-1.00 -2.75	310.39	-206.81	-39.16	-39.16	-39.16	-49.71	-21.35	-13.14	-1.71	-3.44	-	-	-	-	-	-
-2.75 -6.40	310.71	0.33	0.06	0.06	0.06	0.08	0.03	0.02	0.00	0.01	-	-	-	-	-	-
-6.40 -11.50	277.96	-32.75	-7.34	-7.34	-7.34	-9.32	6.65	-2.46	-0.64	-0.66	-0.43	-0.49	-0.53	-0.66	-0.94	-0.94
-11.50 -15.50	-	181.62														

Note

*1: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.
Locations of IW1 through IW8 are shown in Figures 6.2.3.9-3 through 6.2.3.9-5



HITACHI

WG3-U71-ERD-S-0004 SH NO. 148

REV. 2

of 543

Table 6.2.3.9-6 Applied Overturning Moment – RBFB X(N-S)-dir.

Elev. (m)	Model Elev. (m)	Story Height (m)	Node No.	RBFB Moment (X-dir.)							
				M (MNm)	moment Mq (MNm)	M-Mq (MNm)	dM (MNm)	m (MNm)	Diff. (m)	dMq (MNm)	m+dMq (MNm)
52.40*1	52.05	18.05	110	2.724E+03	0.000E+00	2.724E+03	2.724E+03	2.724E+03	0.05	9.61	2.734E+03
34.00			109	5.838E+03	3.527E+03	2.311E+03					
34.00	34.00	8.20	109	8.196E+03	3.527E+03	4.669E+03	4.669E+03	1.945E+03	0.00	0.00	1.945E+03
27.00			108	8.719E+03	4.947E+03	3.772E+03					
27.00	25.80	3.30	108	9.400E+03	4.947E+03	4.453E+03	4.453E+03	-2.154E+02	1.20	267.38	5.199E+01
22.50			107	9.599E+03	6.254E+03	3.345E+03					
22.50	22.50	5.30	107	1.122E+04	6.254E+03	4.963E+03	4.963E+03	5.093E+02	0.00	0.00	5.093E+02
17.50			106	1.142E+04	8.567E+03	2.857E+03					
17.50	17.20	4.13	106	1.210E+04	8.567E+03	3.538E+03	3.538E+03	-1.424E+03	0.30	0.62	-1.424E+03
13.57			105	1.235E+04	1.038E+04	1.971E+03					
13.57	13.07	4.51	105	1.284E+04	1.038E+04	2.461E+03	2.461E+03	-1.077E+03	0.50	6.14	-1.071E+03
9.06			104	1.365E+04	1.241E+04	1.241E+03					
9.06	8.56	4.91	104	1.390E+04	1.241E+04	1.494E+03	1.494E+03	-9.670E+02	0.50	1.95	-9.651E+02
4.65			103	1.523E+04	1.464E+04	5.885E+02					
4.65	3.65	5.15	103	9.392E+03	1.464E+04	-5.250E+03	-5.250E+03	-6.745E+03	1.00	0.06	-6.745E+03
-1.00			102	1.095E+04	1.698E+04	-6.032E+03					
-1.00	-1.50	5.40	102	6.545E+03	1.698E+04	-1.044E+04	-1.044E+04	-5.189E+03	0.50	-107.34	-5.296E+03
-6.40			101	7.303E+03	1.828E+04	-1.098E+04					
-6.40	-6.90	4.60	101	4.748E+03	1.828E+04	-1.353E+04	-1.353E+04	-3.093E+03	0.50	-1.16	-3.094E+03
-11.50			2	5.053E+03	1.937E+04	-1.432E+04					
-11.50	-11.50	2.00	2	-	-	-	-	-	-	-	1.177E+03
-15.50			1								

General Note: Q: Design Shear Force
M: Design Moment
Mq: Moment due to Shear

dM: Additional Moment
m: Input Moment
dMq: Moment Modification Considering to the Difference of the Input Level

Note

*1: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 149

REV. 2

of 543

Table 6.2.3.9-7 Applied Overturning Moment – RBFB Y(E-W)-dir.

Elev. (m)	Model Elev. (m)	Story Height (m)	Node No.	RBFB Moment (Y-dir.)							
				M (MNm)	moment Mq (MNm)	M-Mq (MNm)	dM (MNm)	m (MNm)	Diff. (m)	dMq (MNm)	m+dMq (MNm)
52.40*1	52.05	18.05	110	2.143E+03	0.000E+00	2.143E+03	2.143E+03	2.143E+03	0.05	7.00	2.150E+03
34.00			109	4.488E+03	2.568E+03	1.919E+03					
34.00	34.00	8.20	109	5.821E+03	2.568E+03	3.253E+03	3.253E+03	1.110E+03	0.00	0.00	1.110E+03
27.00			108	6.389E+03	3.503E+03	2.887E+03					
27.00	25.80	3.30	108	7.162E+03	3.503E+03	3.659E+03	3.659E+03	4.060E+02	1.20	174.56	5.806E+02
22.50			107	7.958E+03	4.359E+03	3.599E+03					
22.50	22.50	5.30	107	8.328E+03	4.359E+03	3.969E+03	3.969E+03	3.100E+02	0.00	0.00	3.100E+02
17.50			106	9.227E+03	5.906E+03	3.322E+03					
17.50	17.20	4.13	106	9.408E+03	5.906E+03	3.502E+03	3.502E+03	-4.667E+02	0.30	15.50	-4.512E+02
13.57			105	1.020E+04	7.324E+03	2.871E+03					
13.57	13.07	4.51	105	1.026E+04	7.324E+03	2.931E+03	2.931E+03	-5.710E+02	0.50	10.11	-5.608E+02
9.06			104	1.122E+04	8.965E+03	2.251E+03					
9.06	8.56	4.91	104	1.134E+04	8.965E+03	2.373E+03	2.373E+03	-5.581E+02	0.50	9.81	-5.482E+02
4.65			103	1.251E+04	1.085E+04	1.659E+03					
4.65	3.65	5.15	103	6.302E+03	1.085E+04	-4.545E+03	-4.545E+03	-6.918E+03	1.00	-23.26	-6.941E+03
-1.00			102	7.759E+03	1.270E+04	-4.943E+03					
-1.00	-1.50	5.40	102	4.819E+03	1.270E+04	-7.883E+03	-7.883E+03	-3.338E+03	0.50	-66.76	-3.404E+03
-6.40			101	5.358E+03	1.393E+04	-8.567E+03					
-6.40	-6.90	4.60	101	3.351E+03	1.393E+04	-1.057E+04	-1.057E+04	-2.692E+03	0.50	-13.07	-2.705E+03
-11.50			2	3.356E+03	1.485E+04	-1.149E+04					
-11.50	-11.50	2.00	2	-	-	-	-	-	-	-	1.057E+03
-15.50			1								

General Note: Q: Design Shear Force
M: Design Moment
Mq: Moment due to Shear

dM: Additional Moment
m: Input Moment
dMq: Moment Modification Considering to the Difference of the Input Level

Note

*1: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.



HITACHI

WG3-U71-ERD-S-0004 SH NO. 150
REV. 2 of 543

Table 6.2.3.9-8 Applied Overturning Moment – RCCV X(N-S)-dir.

Elev. (m)	Model Elev. (m)	Story Height (m)	Node No.	RCCV Moment (X-dir.)							
				M (MNm)	moment Mq (MNm)	M-Mq (MNm)	dM (MNm)	m (MNm)	Diff. (m)	dMq (MNm)	m+dMq (MNm)
34.00	34.00	8.20	209	2.298E+02	0.000E+00	2.298E+02	2.298E+02	2.298E+02	0.00	0.00	2.298E+02
27.00			208	1.029E+03	1.074E+03	-4.460E+01					
27.00	25.80	8.60	208	2.162E+03	1.074E+03	1.088E+03	1.088E+03	8.580E+02	1.20	12.16	8.702E+02
17.50			206	2.938E+03	2.287E+03	6.509E+02					
17.50	17.20	4.13	206	3.259E+03	2.287E+03	9.719E+02	9.719E+02	-1.160E+02	0.30	12.92	-1.030E+02
13.57			205	3.691E+03	3.047E+03	6.433E+02					
13.57	13.07	4.51	205	3.817E+03	3.047E+03	7.700E+02	7.700E+02	-2.019E+02	0.50	11.88	-1.900E+02
9.06			204	4.389E+03	3.985E+03	4.037E+02					
9.06	8.56	4.91	204	4.481E+03	3.985E+03	4.961E+02	4.961E+02	-2.739E+02	0.50	8.74	-2.652E+02
4.65			203	5.190E+03	5.092E+03	9.850E+01					
4.65	3.65	5.15	203	5.523E+03	5.092E+03	4.315E+02	4.315E+02	-6.453E+01	1.00	-116.19	-1.807E+02
-1.00			202	5.740E+03	5.654E+03	8.605E+01					
-1.00	-1.50	5.40	202	6.008E+03	5.654E+03	3.536E+02	3.536E+02	-7.796E+01	0.50	-20.78	-9.874E+01
-6.40			201	5.924E+03	6.019E+03	-9.560E+01					
-6.40	-6.90	4.60	201	6.053E+03	6.019E+03	3.359E+01	3.359E+01	-3.200E+02	0.50	1.55	-3.184E+02
-11.50			2	5.961E+03	6.345E+03	-3.837E+02					

Note: Q: Design Shear Force
M: Design Moment
Mq: Moment due to Shear

dM: Additional Moment
m: Input Moment
dMq: Moment Modification Considering to the Difference of the Input Level

**HITACHI**

WG3-U71-ERD-S-0004	SH NO. 151
REV. 2	of 543

Table 6.2.3.9-9 Applied Overturning Moment – RCCV Y(E-W)-dir.

Elev. (m)	Model Elev. (m)	Story Height (m)	Node No.	RCCV Moment (Y-dir.)							
				M (MNm)	moment Mq (MNm)	M-Mq (MNm)	dM (MNm)	m (MNm)	Diff. (m)	dMq (MNm)	m+dMq (MNm)
34.00	34.00	8.20	209	5.097E+02	0.000E+00	5.097E+02	5.097E+02	5.097E+02	0.00	0.00	5.097E+02
27.00			208	1.160E+03	1.093E+03	6.738E+01					
27.00	25.80	8.60	208	2.303E+03	1.093E+03	1.210E+03	1.210E+03	7.004E+02	1.20	22.36	7.228E+02
17.50			206	3.071E+03	2.399E+03	6.722E+02					
17.50	17.20	4.13	206	3.667E+03	2.399E+03	1.268E+03	1.268E+03	5.806E+01	0.30	1.95	6.001E+01
13.57			205	3.904E+03	3.053E+03	8.512E+02					
13.57	13.07	4.51	205	4.203E+03	3.053E+03	1.150E+03	1.150E+03	-1.181E+02	0.50	7.54	-1.105E+02
9.06			204	4.491E+03	3.835E+03	6.557E+02					
9.06	8.56	4.91	204	4.853E+03	3.835E+03	1.018E+03	1.018E+03	-1.318E+02	0.50	13.87	-1.179E+02
4.65			203	5.203E+03	4.823E+03	3.799E+02					
4.65	3.65	5.15	203	5.470E+03	4.823E+03	6.472E+02	6.472E+02	-3.711E+02	1.00	-75.48	-4.466E+02
-1.00			202	5.824E+03	5.470E+03	3.541E+02					
-1.00	-1.50	5.40	202	6.066E+03	5.470E+03	5.962E+02	5.962E+02	-5.097E+01	0.50	-28.81	-7.978E+01
-6.40			201	6.035E+03	5.838E+03	1.973E+02					
-6.40	-6.90	4.60	201	6.141E+03	5.838E+03	3.037E+02	3.037E+02	-2.925E+02	0.50	-6.47	-2.989E+02
-11.50			2	6.127E+03	6.091E+03	3.594E+01					

Note: Q: Design Shear Force
M: Design Moment
Mq: Moment due to Shear

dM: Additional Moment
m: Input Moment
dMq: Moment Modification Considering to the Difference of the Input Level



HITACHI

WG3-U71-ERD-S-0004 SH NO. 152
REV. 2 of 543

Table 6.2.3.9-10 Applied Overturning Moment – RPV Pedestal X(N-S)-dir.

Elev. (m)	Model Elev. (m)	Story Height (m)	Node No.	Pedestal Moment (X-dir.)							
				M (MNm)	moment Mq (MNm)	M-Mq (MNm)	dM (MNm)	m (MNm)	Diff. (m)	dMq (MNm)	m+dMq (MNm)
4.65	3.65	1.00	303	6.670E+02	0.000E+00	6.670E+02	6.670E+02	6.670E+02	1.00	20.55	6.876E+02
2.42			377	6.508E+02	4.589E+01	6.049E+02					
2.42	2.65	4.15	377	7.931E+02	4.589E+01	7.472E+02	7.472E+02	8.017E+01	0.23	2.65	8.281E+01
-1.00			302	7.541E+02	1.554E+02	5.987E+02					
-1.00	-1.50	1.80	302	6.913E+02	1.554E+02	5.359E+02	5.359E+02	-2.113E+02	0.50	-4.97	-2.162E+02
-2.75			376	6.581E+02	1.942E+02	4.639E+02					
-2.75	-3.30	3.60	376	6.580E+02	1.942E+02	4.638E+02	4.638E+02	-7.210E+01	0.55	-0.20	-7.230E+01
-6.40			301	5.943E+02	2.735E+02	3.208E+02					
-6.40	-6.90	4.60	301	5.553E+02	2.735E+02	2.818E+02	2.818E+02	-1.820E+02	0.50	4.03	-1.780E+02
-11.50			2	5.535E+02	4.256E+02	1.279E+02					

Note: Q: Design Shear Force dM: Additional Moment
M: Design Moment m: Input Moment
Mq: Moment due to Shear dMq: Moment Modification Considering to the Difference of the Input Level



HITACHI

WG3-U71-ERD-S-0004 SH NO. 153
REV. 2 of 543

Table 6.2.3.9-11 Applied Overturning Moment – RPV Pedestal Y(E-W)-dir.

Elev. (m)	Model Elev. (m)	Story Height (m)	Node No.	Pedestal Moment (Y-dir.)							
				M (MNm)	moment Mq (MNm)	M-Mq (MNm)	dM (MNm)	m (MNm)	Diff. (m)	dMq (MNm)	m+dMq (MNm)
4.65	3.65	1.00	303	4.962E+02	0.000E+00	4.962E+02	4.962E+02	4.962E+02	1.00	16.90	5.131E+02
2.42			377	5.021E+02	3.774E+01	4.644E+02					
2.42	2.65	4.15	377	6.139E+02	3.774E+01	5.761E+02	5.761E+02	7.997E+01	0.23	7.22	8.719E+01
-1.00			302	6.309E+02	1.450E+02	4.859E+02					
-1.00	-1.50	1.80	302	5.706E+02	1.450E+02	4.256E+02	4.256E+02	-1.505E+02	0.50	7.86	-1.427E+02
-2.75			376	5.551E+02	1.726E+02	3.825E+02					
-2.75	-3.30	3.60	376	5.551E+02	1.726E+02	3.825E+02	3.825E+02	-4.306E+01	0.55	8.83	-3.423E+01
-6.40			301	5.244E+02	2.311E+02	2.933E+02					
-6.40	-6.90	4.60	301	5.184E+02	2.311E+02	2.873E+02	2.873E+02	-9.526E+01	0.50	11.19	-8.407E+01
-11.50			2	5.137E+02	3.453E+02	1.684E+02					

Note: Q: Design Shear Force dM: Additional Moment
M: Design Moment m: Input Moment
Mq: Moment due to Shear dMq: Moment Modification Considering to the Difference of the Input Level



HITACHI

WG3-U71-ERD-S-0004 SH NO. 154

REV. 2

of 543

Table 6.2.3.9-12 Design Vertical Acceleration for Slabs

EL (m)	Node	Weight sW_i (kN)	Oscillator Acceleration sA_i (g)	$sA_i \times sW_i$ (kN-g)	sA_{eq} (g)	Slab Weight W_{Si} (kN)				$W_{Si} - \sum sW_i$ (kN)				Seismic Analysis Results			Applied Acc. (g)	Portion
						RB/FB		RCCV	Pedestal	RB/FB		RCCV	Pedestal	Z-dir. Acceleration (g)				
						RBW	FBW	CCW	$PEDW$	RBW_s	FBW_s	CCW_s	$PEDW_s$	RB^A	CC^A	PED^A		
52.4'	9101	29394	0.32	9541	1.51	50695				5180				1.56			1.51	RB Roof
	9102	4406	1.28	5627														
	9103	5859	6.27	36721														
	9104	2726	2.62	7136														
	9105	186	2.42	449														
	9106	1211	3.52	4265														
	9107	824	3.22	2650														
	9108	909	2.50	2275														
34.00	9091	4918	1.61	7938	1.61	30344		40678		27885		29053		1.20	1.20		1.23	RB-RCCV RCCV
	9092	9165	1.61	14731	1.61												1.30	
27.00	9081	39043	1.60	62331	1.55	61551	18448	171322		48004	18448	69949		1.02	1.12		1.37	Top Slab RB-RCCV MS Tunnel Slab
	9082	52533	1.52	79714														
	9083	8768	1.30	11392	1.30												1.06	
	9084	9163	1.67	15334	1.67												1.13	
	9085	5413	1.46	7910														
22.50	9071	20024	1.15	22991	1.34		30394				2345			0.92			1.31	FB Roof
	9072	2679	1.64	4404														
	9073	707	4.47	3156														
	9074	3442	1.53	5283														
	9075	1196	1.51	1809														
17.50	9061	5798	3.65	21166	3.40	26787		52884		12732		46092		0.80	0.91		1.74	MS Tunnel Slab RB-RCCV
	9062	1465	2.40	3523														
	9063	9707	1.13	11017	1.18												0.94	
	9064	37619	2.56	96235	2.38													
	9065	3877	1.28	4975														
	99064	4884	0.99	4817														
13.57	9051	10042	1.11	11167	1.15	26268	1295	16342		19081	1295	9154		0.72	0.82		0.89	RB-RCCV
	9052	4333	1.25	5420														
9.06	9041	11090	0.95	10531	1.04	28298		16069		20346		8117		0.62	0.72		0.79	RB-RCCV
	9042	4816	1.26	6054														
4.65	9031	11025	1.62	17900	1.66	25975	32624	56614	64383		16193	11812	48175	0.56	0.65	0.65	1.11	FB RB-RCCV RCCV-Pedestal
	9032	51608	0.89	46093	0.91												0.87	
	9033	32416	1.12	36403	1.12												0.82	
	9034	5407	1.73	9346														
	9035	5579	1.07	5966														
-1.00	9021	3655	0.97	3531	1.25	27955	37426	23803	16700	20115	29902	8894	9631	0.57	0.58	0.59	0.71	FB RB-RCCV RCCV-Pedestal
	9022	1086	1.90	2065														
	9023	10996	0.98	10733	1.03												0.73	
	9024	5993	0.85	5107	0.87												0.72	
	9025	4685	1.14	5341														
	9026	2783	1.38	3832														
	9027	8144	0.89	7243														
-6.40	9011	3704	0.73	2705	0.80	29797	40864	23914	14176	22680	37488	13133	10513	0.53	0.55	0.56	0.61	RCCV-Pedestal RB-RCCV FB
	9012	3622	0.87	3155														
	9013	4424	0.91	4012	0.99												0.66	
	9014	3377	1.12	3773	1.12												0.58	
	9015	9811	1.03	10115														

Note

*1: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.



HITACHI

WG3-U71-ERD-S-0004 SH NO. 155
REV. 2 of 543

Table 6.2.3.9-13 Applied Shear Forces for Seismic Wall due to Torsional Moment

Elevation (m)	Center of Rigid		Design Shear Force (MN)	Torsion due to Shear Force <i>T_s</i> (MNm)	Design Torsion <i>T</i> (MNm)	<i>T-T_s</i> (MNm)	Applied Torsion (MNm)								
	Rx (m)	Ry (m)													
52.40* ¹ 34.00	23.50	24.44	139.97		1754.7	1754.7	1754.7	Torsion (MNm)	RA RG	446.5 446.5			R1 R7	430.8 430.8	
34.00 27.00	23.50	23.50	247.18	0.0	2839.6	2839.6	1085.0	Area (m ²)	RA RG	49.0 49.0	PG PG	59.2 59.2	R1 R7	49.0 49.0	
								Rot. Stiff. (m ⁴)	RA RG	27060.3 27060.3	PG PG	2818.5 2818.5	R1 R7	27060.3 27060.3	
								Torsion (MNm)	RA RG	257.8 257.8	PG PG	26.9 26.9	R1 R7	257.8 257.8	
27.00 22.50	25.76	23.50	411.28	559.4	5977.6	5418.1	2578.5	Area (m ²)	RA RG	73.5 73.5			R1 R7	50.1 73.5	
								Rot. Stiff. (m ⁴)	RA RG	40596.0 40584.7	RCCV RCCV Y	86149.0 241.2	R1 R7	33253.5 33148.6	
								Torsion (MNm)	RA RG	447.4 447.3	RCCV RCCV Y	949.4 2.7	R1 R7	366.5 365.3	
22.50 17.50	33.18	23.98	443.71	3610.2	7997.4	4387.2	-1030.9	Area (m ²)	RA RG	92.2 90.1			R1 R7 F3	48.4 73.5 48.6	
								Rot. Stiff. (m ⁴)	RA RG	48844.3 51831.2	RCCV RCCV Y RCCV X	86149.0 11182.6 28.0	R1 R7 F3	56535.6 14036.1 65816.7	
								Torsion (MNm)	RA RG	-150.6 -159.8	RCCV RCCV Y RCCV X	-265.6 -34.5 -0.1	R1 R7 F3	-174.3 -43.3 -202.9	

Note

*1: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 156

REV. 2

of 543

Table 6.2.3.9-13 Applied Shear Forces for Seismic Wall due to Torsional Moment (Continued)

Elevation (m)	Center of Rigid		Design Shear Force (MN)	Torsion due to Shear Force <i>T_s</i> (MNm)	Design Torsion <i>T</i> (MNm)	<i>T-T_s</i> (MNm)	Applied Torsion (MNm)								
	Rx (m)	Ry (m)													
17.50 13.57	30.49	23.99	501.87	2416.9	7516.9	5099.9	712.7	Area (m ²)	RA	92.2		R1	73.5		
									RG	90.1		R7	73.5		
									F3	49.0					
								Rot. Stiff. (m ⁴)	RA	48837.5	RCCV	86149.0	R1	68335.7	
									RG	51838.1	RCCV Y	5832.7	R7	20030.7	
											RCCV X	28.2	F3	68937.1	
Torsion (MNm)	RA	99.4	RCCV	175.4	R1	139.2									
	RG	105.6	RCCV Y	11.9	R7	40.8									
			RCCV X	0.1	F3	140.4									
13.57 9.06	30.49	23.82	537.18	2416.9	7966.1	5549.2	449.2	Area (m ²)	RA	92.2		R1	73.5		
									RG	92.2		R7	73.5		
									F3	49.0					
								Rot. Stiff. (m ⁴)	RA	49547.3	RCCV	86149.0	R1	68335.5	
									RG	52317.5	RCCV Y	5832.6	R7	20030.9	
											RCCV X	12.2	F3	68937.3	
Torsion (MNm)	RA	63.4	RCCV	110.2	R1	87.4									
	RG	66.9	RCCV Y	7.5	R7	25.6									
			RCCV X	0.0	F3	88.2									
9.06 4.65	31.00	24.23	584.54	2690.1	8798.2	6108.1	558.9	Area (m ²)	RA	90.8		R1	69.4		
									RG	88.9		R7	73.5		
									F3	47.9					
								Rot. Stiff. (m ⁴)	RA	47067.7	RCCV	86149.0	R1	66693.8	
									RG	52178.6	RCCV Y	6711.9	R7	18815.8	
											RCCV X	64.2	F3	65615.8	
Torsion (MNm)	RA	76.6	RCCV	140.3	R1	108.6									
	RG	84.9	RCCV Y	10.9	R7	30.6									
			RCCV X	0.1	F3	106.8									



HITACHI

WG3-U71-ERD-S-0004 SH NO. 157
REV. 2 of 543

Table 6.2.3.9-13 Applied Shear Forces for Seismic Wall due to Torsional Moment (Continued)

Elevation (m)	Center of Rigid		Design Shear Force (MN)	Torsion due to Shear Force T_s (MNm)	Design Torsion T (MNm)	$T-T_s$ (MNm)	Applied Torsion (MNm)								
	Rx (m)	Ry (m)													
4.65 -1.00	36.41	24.21	502.70	5851.0	8617.3	2766.3	-3341.8	Area (m ²)	RA	163.3			R1	98.0	
									RG	154.0			R7	137.8	
													F3	125.1	
								Rot. Stiff. (m ⁴)	RA	84805.4	RCCV	86149.0	R1	129900.4	
									RG	90273.1	RCCV Y	19879.5	R7	15464.4	
											RCCV X	60.4	F3	124889.6	
								Torsion (MNm)			pede	4739.1			
											pede Y	8537.7			
											pede X	25.9			
-1.00 -6.40	36.67	24.29	310.39	5981.7	4436.6	-1545.2	-4311.4	Area (m ²)	RA	-501.8	RCCV	-509.8	R1	-768.7	
									RG	-534.2	RCCV Y	-117.6	R7	-91.5	
											RCCV X	-0.4	F3	0.0	
								Rot. Stiff. (m ⁴)			pede	-28.0			
											pede Y	-50.5			
											pede X	-0.2			
								Torsion (MNm)	RA	160.4	RCCV	86149.0	R1	98.0	
									RG	151.6	RCCV Y	20688.6	R7	140.6	
											RCCV X	73.9	F3	132.5	
								Rot. Stiff. (m ⁴)	RA	82738.2	RCCV	86149.0	R1	131762.7	
									RG	89427.1	RCCV Y	20688.6	R7	15004.7	
											RCCV X	73.9	F3	130106.7	
								Torsion (MNm)			pede	4739.1			
											pede Y	8885.2			
											pede X	31.7			
									RA	-626.3	RCCV	-652.1	R1	-997.3	
									RG	-676.9	RCCV Y	-156.6	R7	-113.6	
											RCCV X	-0.6	F3	0.0	
											pede	-35.9			
											pede Y	-67.3			
											pede X	-0.2			



HITACHI

WG3-U71-ERD-S-0004 SH NO. 158

REV. 2

of 543

Table 6.2.3.9-13 Applied Shear Forces for Seismic Wall due to Torsional Moment (Continued)

Elevation (m)	Center of Rigid		Design Shear Force (MN)	Torsion due to Shear Force <i>T_s</i> (MNm)	Design Torsion <i>T</i> (MNm)	<i>T-T_s</i> (MNm)	Applied Torsion (MNm)							
	Rx (m)	Ry (m)												
-6.40 -11.50	36.23	23.82	277.96	5844.4	3445.5	-2398.9	-853.7	Area (m ²)	RA	171.0		R1	120.0	
									RG	169.3		R7	151.8	
												F3	146.2	
								Rot. Stiff. (m ⁴)	RA	91878.2	RCCV	86149.0	R1	157470.9
									RG	96045.6	RCCV Y	19321.2	R7	17618.0
											RCCV X	12.0	F3	147600.0
											pede	4739.1		
											pede Y	8298.0		
								Torsion (MNm)			pede X	5.2		
									RA	-124.7	RCCV	-116.9	R1	-213.7
									RG	-130.3	RCCV Y	-26.2	R7	-23.9
											RCCV X	0.0	F3	0.0
		pede	-6.4											
		pede Y	-11.3											
		pede X	0.0											



HITACHI

WG3-U71-ERD-S-0004 SH NO. 160
REV. 2 of 543

Table 6.2.3.9-15 Design Acceleration for Seismic Walls

EL (m)	Node*1	Weight W_i (kN)	Oscillator Acceleration A_i (g)	$W_i \times A_i$ (kN•g)	A_{eq} (g)	$A_{eq} \times W$ (kN•g)	Wall Weight W (kN)	Seismic Analysis Results A (g)	$A \times W$ (kN•g)	Applied Acc. A_{ave} (g)	Portion
42.0	99981	8.13	2.66	21.61	2.59	22.45	7.58	1.54	11.69	2.1	R1 and R7 walls
	99982	0.54	1.54	0.84							
	99986	-	-	-							
	99983	4.56	1.86	8.48	1.34	15.94	8.48	1.18	9.97	1.27	RB and RF walls
	99984	5.1	1.02	5.19							
	99985	2.28	1	2.27							
	99987	-	-	-							
30.5	99991	3.51	0.58	2.03	0.58	2.03	3.11	0.59	1.82	0.58	R1 and R7 walls
	99992	4.77	0.56	2.67	0.56	2.67	1.65	0.48	0.8	0.54	RA and RG walls
13.57	99971	8.09	2.11	17.04	2.05	22.33	8.87	0.79	6.98	1.48	F3 wall
	99972	2.38	2	4.75							
	99973	0.23	1.35	0.31							
	99974	0.21	1.04	0.22							
	99977	-	-	-							
	99975	4.93	2.16	10.66	1.98	11.44	2.69	0.62	1.67	1.55	FA and FF walls
	99976	0.86	0.92	0.79							
	99978	-	-	-							

Note

*1: Additional oscillators for cracked model are shown in red.



Table 6.2.4-1 Results of NASTRAN Analysis, Dead Load

Location	Element ID	N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
18 Wall Below RCCV Bottom	6	0.098	-7.251	0.529	-0.215	-1.591	0.013	-0.040	-0.493
	13	0.242	-5.659	0.429	-0.512	-2.703	0.004	-0.006	-0.810
	24	0.184	-6.204	-0.208	-0.545	-2.883	0.005	0.000	-0.846
19 Wall Below RCCV Mid-Height	806	-0.044	-6.138	0.142	0.023	-0.036	-0.020	0.010	-0.114
	813	-0.218	-5.545	0.365	-0.028	-0.048	-0.010	-0.013	-0.188
	824	-0.165	-6.106	-0.192	-0.031	-0.008	-0.006	0.001	-0.205
20 Wall Below RCCV Top	1606	-0.602	-5.404	0.067	0.107	0.514	0.004	-0.004	-0.214
	1613	-0.719	-5.262	0.249	0.098	0.612	0.003	0.000	-0.258
	1624	-0.607	-5.776	-0.136	0.096	0.573	0.001	-0.006	-0.233
21 Exterior Wall @ EL-11.50 ~-10.50m	20011	-0.677	-3.868	-0.512	0.060	0.423	0.012	0.055	0.181
	20023	-0.005	-1.419	-0.534	0.071	-0.326	-0.004	-0.136	-0.187
	30010	-0.150	-2.234	0.064	-0.334	-1.815	0.013	0.001	0.432
	30020	-0.043	-1.277	-0.256	0.183	-0.653	-0.058	0.156	0.223
	40001	-0.042	-1.307	0.234	0.185	-0.651	0.061	-0.153	0.212
22 Exterior Wall @ EL4.65 ~-6.60m	40011	-0.332	-2.661	-0.013	-0.377	-2.031	-0.009	-0.001	0.489
	22011	0.220	-3.113	0.658	-0.012	0.061	0.009	-0.017	0.059
	22023	0.019	-1.551	-0.478	-0.161	-0.010	-0.019	0.102	0.012
	32010	-0.002	-1.843	0.062	0.000	0.040	0.001	0.000	-0.022
	32020	-0.046	-2.047	-0.055	-0.060	-0.003	-0.005	-0.054	-0.008
23 Exterior Wall @ EL22.50 ~-24.60m	42001	-0.058	-2.121	-0.051	-0.077	-0.004	0.002	0.039	-0.003
	42011	-0.312	-2.280	-0.114	-0.003	0.032	-0.003	0.002	-0.014
	24211	-0.159	-1.748	0.058	-0.064	-0.427	0.006	-0.003	-0.038
	24224	-0.035	-1.012	0.272	0.025	-0.046	-0.039	-0.059	-0.035
	34210	0.002	-0.779	0.086	-0.005	-0.070	0.002	0.004	-0.008
24 Basemat @ Wall Below RCCV	34220	0.038	-0.897	-0.146	0.046	-0.031	-0.004	0.037	0.002
	44201	0.021	-1.056	-0.314	0.039	-0.015	0.011	-0.042	-0.001
	90140	0.249	-0.799	-0.162	-1.437	-1.147	2.553	-1.778	2.031
25 Slab EL4.65m @ RCCV	90182	-0.241	-0.326	-0.068	0.658	-1.083	-0.322	0.236	0.661
	90111	-0.385	-0.579	0.036	-0.958	0.835	-0.401	0.709	0.138
	93140	-0.159	0.143	0.090	0.075	0.095	-0.066	0.119	-0.097
26 Slab EL17.5m @ RCCV	93182	0.145	0.092	0.000	0.027	0.108	0.007	-0.008	-0.146
	93111	0.056	0.170	-0.029	0.127	0.027	0.005	-0.137	-0.004
	96144	-0.079	0.170	0.181	0.046	0.061	-0.046	0.103	-0.081
27 Slab EL27.0m @ RCCV	96186	0.257	-0.063	-0.023	-0.002	-0.004	-0.002	-0.003	-0.033
	96113	-0.070	0.514	-0.048	-0.173	0.019	-0.001	0.196	0.027
	98472	0.386	0.059	0.126	0.294	0.487	-0.422	0.345	-0.402
28 Pool Girder @ Storage Pool	98514	0.146	0.113	0.032	0.043	0.188	0.035	-0.019	-0.143
	98424	-0.102	0.477	-0.027	1.915	0.461	0.006	-1.195	-0.093
	123054	0.420	-2.372	-0.765	0.050	0.044	0.046	-0.012	-0.020
29 Pool Girder @ Cavity	123154	1.306	-0.479	-0.607	0.072	0.028	0.088	0.008	0.011
	123062	0.397	0.548	0.257	-0.042	-0.210	0.022	0.017	-0.109
30 Pool Girder @ Fuel Pool	123162	-1.349	0.198	0.131	-0.071	-0.046	0.012	0.081	0.026
	123067	0.402	-2.129	1.430	0.011	-0.044	-0.066	-0.097	-0.052
	123167	0.464	-0.540	1.244	0.033	0.026	0.012	-0.024	0.006
31 MS Tunnel Wall and Slab	150122	-0.026	0.039	0.284	0.022	0.047	0.016	-0.010	-0.043
	96611	-0.013	0.313	-0.016	0.062	-0.080	-0.052	-0.073	0.018
	98614	-0.023	-0.166	-0.020	0.002	-0.526	-0.065	-0.048	0.032
32 IC/PCCS Pool Wall in NS Direction	125051	-0.097	-1.275	-0.895	0.001	-0.057	-0.002	0.002	-0.042
	125151	-0.106	-0.520	-0.735	-0.002	-0.007	-0.005	0.008	-0.002
	125055	0.046	-0.168	-0.099	-0.017	-0.104	0.003	-0.035	-0.069
	125155	-0.520	-0.112	-0.082	0.006	0.028	0.005	0.032	-0.037

Note: Results are based on the RB/FB global FE model which is used in Appendix E of "ESBWR Reactor Building Structural Design Report", Reference 2.1.2-e.



Table 6.2.4-2 Results of NASTRAN Analysis, Drywell Unit Pressure (1 MPa)

Location	Element ID	N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
18 Wall Below RCCV Bottom	6	-0.782	3.081	-0.494	0.535	3.112	-0.009	0.024	1.037
	13	-0.601	2.839	-0.131	0.565	3.223	-0.001	-0.001	1.001
	24	-0.965	3.199	0.063	0.600	3.410	-0.006	0.005	1.062
19 Wall Below RCCV Mid-Height	806	0.141	3.210	-0.420	-0.006	0.034	0.012	-0.010	0.098
	813	0.210	2.625	-0.115	-0.004	0.035	0.006	0.025	0.187
	824	0.073	3.362	0.087	0.025	-0.023	0.004	-0.001	0.177
20 Wall Below RCCV Top	1606	0.820	3.176	-0.445	-0.313	-1.804	0.002	0.000	0.507
	1613	0.808	2.321	-0.087	-0.315	-1.779	-0.004	-0.001	0.534
	1624	0.893	3.579	0.049	-0.315	-1.982	-0.003	0.003	0.588
21 Exterior Wall @ EL-11.50 ~-10.50m	20011	0.071	0.558	0.035	0.201	0.718	0.015	-0.013	0.211
	20023	0.012	-0.084	-0.112	-0.052	0.030	-0.003	-0.001	0.016
	30010	0.281	-0.185	-0.032	0.275	1.324	-0.013	-0.002	-0.276
	30020	0.101	-0.299	-0.038	-0.094	0.015	0.028	0.036	0.004
	40001	0.048	-0.243	0.191	-0.084	0.093	-0.015	-0.008	-0.014
	40011	-0.173	0.038	-0.025	0.312	1.502	0.011	-0.001	-0.323
22 Exterior Wall @ EL4.65 ~-6.60m	22011	0.051	0.628	-0.101	0.009	0.001	0.005	0.004	-0.144
	22023	-0.005	-0.271	-0.117	-0.003	0.025	-0.005	0.017	-0.006
	32010	0.202	0.007	0.008	0.011	0.089	0.002	0.000	0.055
	32020	0.014	-0.482	0.395	0.014	0.036	-0.008	-0.005	0.026
	42001	-0.016	-0.401	0.432	0.013	0.028	-0.009	0.000	0.000
	42011	0.028	0.846	-0.056	0.019	0.010	0.008	-0.004	0.085
23 Exterior Wall @ EL22.50 ~-24.60m	24211	0.887	0.469	-0.039	0.164	0.924	0.022	0.021	-0.547
	24224	0.026	-1.421	-0.355	-0.009	0.166	0.068	0.112	0.106
	34210	0.867	-0.063	0.043	-0.017	0.218	0.014	-0.009	0.108
	34220	0.082	-1.253	0.474	0.009	0.116	0.022	0.010	-0.007
	44201	0.015	-0.962	0.694	0.044	0.080	-0.024	0.002	-0.011
24 Basemat @ Wall Below RCCV	90140	-0.184	0.372	0.811	3.065	2.483	-3.410	0.372	-0.663
	90182	1.621	0.055	-0.077	-0.815	4.523	0.451	-0.086	-0.661
	90111	0.105	0.741	-0.115	4.496	-0.686	0.507	-0.674	-0.062
25 Slab EL4.65m @ RCCV	93140	-0.061	0.033	0.040	0.089	0.062	-0.063	0.015	-0.018
	93182	0.102	-0.076	0.023	0.000	0.105	0.006	-0.001	-0.009
	93111	-0.082	0.016	0.009	0.139	0.008	0.004	-0.040	-0.002
26 Slab EL17.5m @ RCCV	96144	0.344	0.356	1.139	0.212	0.292	-0.200	0.047	-0.091
	96186	1.151	-0.565	0.134	0.037	0.398	-0.057	0.014	-0.184
	96113	-0.707	1.224	0.310	2.177	0.197	-0.345	-0.896	-0.091
27 Slab EL27.0m @ RCCV	98472	0.163	0.996	-0.907	-0.605	-0.974	1.234	-0.362	0.445
	98514	0.037	0.075	-0.055	-0.199	-1.790	-0.112	0.035	0.525
	98424	-0.651	2.174	-0.117	-5.122	-0.748	-0.373	1.644	0.136
28 Pool Girder @ Storage Pool	123054	-0.702	7.558	5.501	0.029	-0.028	-0.463	-0.088	-0.117
	123154	-2.824	1.013	4.826	-0.013	0.047	-0.605	-0.224	0.053
29 Pool Girder @ Cavity	123062	-0.641	-4.572	-3.810	0.138	1.124	-0.031	0.036	0.525
	123162	8.026	-1.931	-2.543	0.323	0.246	-0.048	-0.321	-0.086
30 Pool Girder @ Fuel Pool	123067	-0.860	8.105	-7.114	-0.065	0.021	0.320	0.259	-0.060
	123167	-2.176	1.703	-6.458	-0.046	-0.082	0.022	0.061	0.053
31 MS Tunnel Wall and Slab	150122	0.128	-0.669	0.201	-0.004	0.075	-0.012	0.009	-0.068
	96611	-0.032	0.635	-0.024	-0.062	-0.109	-0.020	0.021	0.008
	98614	0.000	-0.192	-0.002	-0.459	-1.034	-0.154	0.139	0.047
32 IC/PCCS Pool Wall in NS Direction	125051	0.631	4.482	4.339	-0.082	0.227	0.008	-0.073	0.187
	125151	0.945	1.262	3.557	-0.093	0.031	0.016	-0.146	0.023
	125055	0.099	-0.466	-0.041	0.109	0.530	-0.005	0.174	0.329
	125155	2.945	-0.386	-0.013	-0.014	-0.143	-0.026	-0.195	0.216

Note: Results are based on the RB/FB global FE model which is used in Appendix E of "ESBWR Reactor Building Structural Design Report", Reference 2.1.2-e.



Table 6.2.4-3 Results of NASTRAN Analysis, Wetwell Unit Pressure (1 MPa)

Location	Element ID	N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
18 Wall Below RCCV Bottom	6	-0.252	0.171	-0.090	0.107	0.648	-0.004	0.008	0.198
	13	-0.231	-0.049	-0.048	0.134	0.745	0.000	0.001	0.225
	24	-0.284	-0.077	0.037	0.137	0.774	-0.001	0.001	0.234
19 Wall Below RCCV Mid-Height	806	0.144	0.122	0.017	0.041	0.233	0.012	0.001	-0.018
	813	0.188	-0.091	-0.016	0.066	0.252	0.004	0.003	0.018
	824	0.162	-0.098	0.038	0.047	0.251	0.000	-0.001	0.026
20 Wall Below RCCV Top	1606	1.578	0.058	0.000	-0.455	-2.620	0.000	0.002	0.845
	1613	1.551	-0.214	-0.015	-0.469	-2.690	-0.005	-0.002	0.913
	1624	1.738	-0.224	0.026	-0.492	-2.731	0.008	-0.001	0.940
21 Exterior Wall @ EL-11.50 ~-10.50m	20011	0.139	0.542	0.021	0.087	0.330	0.007	-0.021	0.109
	20023	0.002	-0.001	-0.013	-0.026	0.041	0.000	0.014	0.020
	30010	0.185	0.328	0.000	0.104	0.555	-0.003	-0.002	-0.118
	30020	0.026	-0.146	-0.025	-0.046	0.045	0.013	0.002	-0.008
	40001	0.017	-0.134	0.055	-0.046	0.061	-0.010	0.002	-0.013
22 Exterior Wall @ EL4.65 ~-6.60m	40011	0.133	0.364	0.023	0.110	0.594	0.003	0.002	-0.129
	22011	0.988	0.301	-0.104	-0.002	0.136	0.004	-0.015	0.312
	22023	0.115	0.355	0.206	0.298	0.060	-0.059	-0.102	-0.014
	32010	1.119	0.199	-0.062	-0.014	0.105	0.016	-0.001	-0.307
	32020	0.107	0.618	0.244	0.221	0.042	-0.106	0.155	0.013
23 Exterior Wall @ EL22.50 ~-24.60m	42001	0.147	0.661	-0.064	0.290	0.042	0.042	-0.106	0.021
	42011	1.034	0.248	0.149	-0.054	0.071	-0.025	0.003	-0.297
	24211	0.425	0.464	0.000	0.033	0.221	-0.003	-0.004	-0.012
	24224	0.020	0.310	-0.156	-0.041	-0.048	0.012	0.001	-0.065
	34210	0.478	0.251	0.003	0.029	0.238	-0.017	0.003	0.047
24 Basemat @ Wall Below RCCV	34220	-0.018	0.123	-0.001	-0.015	0.031	0.013	-0.030	-0.014
	44201	-0.015	0.143	0.110	-0.011	0.023	-0.011	0.030	-0.009
	90140	0.072	0.134	0.147	0.029	0.008	-0.426	-0.094	0.014
	90182	0.341	0.108	0.007	-0.319	-0.040	0.060	-0.002	0.295
	90111	0.107	0.259	-0.015	-0.102	-0.332	0.074	0.330	0.006
25 Slab EL4.65m @ RCCV	93140	0.299	0.397	0.346	0.056	0.042	-0.051	0.002	-0.002
	93182	0.688	0.227	-0.055	-0.008	0.079	0.004	0.002	0.074
	93111	0.238	0.671	-0.130	0.058	-0.014	-0.002	0.062	-0.001
26 Slab EL17.5m @ RCCV	96144	-0.055	0.894	0.401	0.037	-0.089	0.044	0.008	0.024
	96186	0.831	-0.319	-0.424	0.017	-0.030	0.075	-0.023	-0.100
	96113	-0.517	1.364	-0.705	-0.862	-0.011	0.377	0.041	0.027
27 Slab EL27.0m @ RCCV	98472	-0.079	0.083	0.373	0.226	0.288	-0.176	0.137	-0.118
	98514	0.179	0.119	0.007	0.049	0.379	0.009	-0.004	-0.230
	98424	0.106	0.447	0.015	0.431	0.068	0.025	-0.182	-0.014
28 Pool Girder @ Storage Pool	123054	0.151	0.051	-0.045	-0.001	-0.012	0.001	0.017	-0.016
	123154	0.033	0.022	-0.047	0.005	0.007	-0.001	0.006	0.001
29 Pool Girder @ Cavity	123062	0.245	0.035	0.047	-0.010	-0.011	-0.001	0.017	-0.009
	123162	0.168	0.026	0.059	-0.001	0.003	-0.004	0.005	-0.002
30 Pool Girder @ Fuel Pool	123067	0.107	-0.487	-0.009	-0.027	-0.046	-0.017	-0.022	-0.044
	123167	0.251	-0.136	-0.046	0.006	0.008	0.000	-0.012	-0.002
31 MS Tunnel Wall and Slab	150122	0.014	-0.089	-0.006	-0.006	0.019	0.006	0.001	-0.004
	96611	-0.069	0.458	-0.055	0.003	-0.028	0.005	0.001	0.000
	98614	0.007	-0.122	0.005	-0.052	-0.095	-0.020	0.014	0.006
32 IC/PCCS Pool Wall in NS Direction	125051	0.045	-0.153	0.010	-0.009	-0.021	0.001	-0.007	-0.012
	125151	0.022	-0.056	-0.008	-0.006	-0.004	0.000	-0.005	-0.002
	125055	0.158	0.039	0.046	-0.001	-0.006	0.001	0.000	-0.003
	125155	0.067	0.031	0.057	0.001	0.002	0.000	0.002	-0.003

Note: Results are based on the RB/FB global FE model which is used in Appendix E of "ESBWR Reactor Building Structural Design Report", Reference 2.1.2-e.



Table 6.2.4-4 Results of NASTRAN Analysis, Thermal Load
(Normal Operation: Winter) – Load Case: TLW0

(Values obtained from Reference 2.1.2-e)

Location	Element ID	N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
18 Wall Below RCCV Bottom	6	1.253	-0.205	-0.568	0.076	0.906	-0.033	0.012	0.034
	13	0.384	-2.513	-0.655	0.359	2.031	-0.003	0.018	0.443
	24	0.608	-2.607	0.109	0.369	2.061	-0.004	-0.001	0.459
19 Wall Below RCCV Mid-Height	806	1.106	-0.949	0.087	0.125	0.770	0.068	-0.045	0.040
	813	0.616	-2.464	-0.504	0.086	0.776	-0.022	0.007	0.463
	824	0.476	-2.699	0.077	0.100	0.784	0.014	0.008	0.416
20 Wall Below RCCV Top	1606	6.930	-1.551	0.139	-0.385	-1.749	0.078	0.068	1.318
	1613	6.711	-2.791	-0.408	-0.489	-2.841	-0.003	-0.010	1.707
	1624	7.196	-3.509	-0.106	-0.548	-2.794	-0.004	-0.051	1.745
21 Exterior Wall @ EL-11.50 ~10.50m	20011	2.857	2.770	0.707	0.218	0.937	0.029	-0.143	0.275
	20023	-1.456	-1.248	1.649	1.953	3.881	0.188	0.289	0.632
	30010	0.135	2.273	-0.121	1.014	3.199	-0.017	-0.023	-0.559
	30020	-0.118	-1.019	-0.219	0.131	1.084	0.109	-0.030	-0.275
	40001	-0.158	-0.676	-0.073	0.169	1.184	-0.072	0.112	-0.307
	40011	0.784	2.397	0.042	1.004	3.271	0.007	0.011	-0.589
22 Exterior Wall @ EL4.65 ~6.60m	22011	1.989	2.366	-0.092	-0.078	-0.066	0.029	0.015	0.113
	22023	1.813	-4.077	-2.023	-0.288	0.359	-0.041	0.709	0.422
	32010	12.350	5.928	0.012	-2.697	-2.528	-0.002	-0.002	-0.174
	32020	0.311	4.027	2.287	-0.573	-1.830	-0.392	0.720	0.111
	42001	2.250	2.855	2.390	-0.736	-1.651	-0.048	-0.662	-0.269
	42011	10.751	3.992	0.063	-2.795	-2.458	0.078	0.067	-0.089
23 Exterior Wall @ EL22.50 ~24.60m	24211	2.843	1.959	-0.374	-0.012	0.038	0.010	-0.116	1.643
	24224	0.119	3.714	-3.310	0.641	-0.241	-0.550	-0.622	-0.226
	34210	13.386	4.447	-0.429	-2.795	-2.685	0.027	-0.009	-0.153
	34220	1.581	3.765	2.292	0.666	-1.618	-0.429	1.495	0.117
	44201	0.865	4.461	-0.102	0.302	-1.803	0.423	-1.817	0.106
24 Basemat @ Wall Below RCCV	90140	1.036	1.410	1.316	1.084	0.020	-1.021	-0.512	-0.135
	90182	1.427	0.428	0.598	-0.072	-3.082	0.173	-0.153	2.372
	90111	0.529	2.358	-0.001	-3.379	-0.412	0.034	2.474	0.116
25 Slab EL4.65m @ RCCV	93140	-0.743	1.592	2.634	-0.402	-0.313	0.220	-0.105	0.085
	93182	2.346	-2.693	-0.779	-0.292	-1.483	-0.064	0.061	1.096
	93111	-2.387	2.996	-0.082	-1.455	-0.268	-0.037	0.959	0.002
26 Slab EL17.5m @ RCCV	96144	0.039	2.670	2.994	-0.152	-0.132	0.104	-0.028	0.043
	96186	2.697	-1.893	-1.089	-0.101	-0.480	-0.033	0.018	0.387
	96113	-4.345	-3.845	-0.732	-3.635	-2.664	-0.140	0.735	-0.030
27 Slab EL27.0m @ RCCV	98472	-0.491	-0.852	4.524	-0.425	-0.142	-0.156	0.325	-0.431
	98514	-0.613	-2.381	-1.036	-0.508	-0.262	-0.053	0.047	-0.171
	98424	-8.688	-9.621	-1.242	0.386	-0.509	0.134	-5.159	-0.068
28 Pool Girder @ Storage Pool	123054	0.578	-3.049	1.386	2.219	2.152	0.031	-0.307	0.546
	123154	0.882	0.664	-0.264	1.850	1.112	-0.331	-0.107	0.233
29 Pool Girder @ Cavity	123062	-2.848	-0.161	-0.520	0.096	0.138	0.035	-0.092	0.076
	123162	-2.548	-0.130	-0.518	0.072	-0.199	0.056	-0.181	0.097
30 Pool Girder @ Fuel Pool	123067	-3.044	-4.728	-1.664	0.540	0.402	-0.076	-0.115	0.516
	123167	-2.836	-2.339	-2.121	0.175	-0.523	-0.229	0.021	0.153
31 MS Tunnel Wall and Slab	150122	0.267	-0.536	1.825	1.079	3.149	-0.033	-0.584	0.414
	96611	-0.243	2.761	-0.171	-1.125	-6.749	-0.368	0.367	0.185
	98614	-0.176	2.269	-0.136	-0.720	-10.191	0.037	0.428	0.285
32 IC/PCCS Pool Wall in NS Direction	125051	-0.451	-0.654	-0.268	-0.001	-0.004	0.000	-0.009	-0.006
	125151	-0.469	-0.568	0.470	0.025	0.055	0.011	-0.018	-0.051
	125055	-1.032	0.211	0.015	0.005	0.025	0.001	0.011	0.010
	125155	-1.349	-0.142	-0.030	0.002	0.027	-0.004	-0.058	0.003



**Table 6.2.4-5 Results of NASTRAN Analysis, Thermal Load
(LOCA After 6 minutes: Winter) – Load Case: TLW6**

(Values obtained from Reference 2.1.2-e)

Location	Element ID	N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
18 Wall Below RCCV Bottom	6	1.177	-0.473	-0.669	0.101	1.063	-0.040	0.024	0.044
	13	0.307	-3.027	-0.689	0.408	2.284	-0.002	0.019	0.475
	24	0.412	-3.041	0.146	0.425	2.350	-0.005	-0.002	0.516
19 Wall Below RCCV Mid-Height	806	1.601	-1.332	0.182	0.235	1.292	0.083	-0.053	-0.063
	813	1.036	-2.990	-0.508	0.175	1.290	-0.027	0.006	0.450
	824	0.890	-3.046	0.126	0.176	1.306	0.019	0.010	0.396
20 Wall Below RCCV Top	1606	11.606	-2.042	0.301	-0.668	-3.250	0.099	0.085	2.306
	1613	11.229	-3.474	-0.425	-0.785	-4.386	-0.008	-0.014	2.714
	1624	12.187	-3.970	-0.124	-0.867	-4.480	-0.001	-0.082	2.817
21 Exterior Wall @ EL-11.50 ~10.50m	20011	3.023	3.384	0.790	0.274	1.136	0.041	-0.173	0.330
	20023	-1.459	-1.215	1.590	1.936	3.930	0.184	0.310	0.647
	30010	0.421	2.641	-0.135	1.081	3.585	-0.018	-0.024	-0.601
	30020	-0.090	-1.196	-0.238	0.081	1.104	0.123	-0.022	-0.270
	40001	-0.154	-0.831	0.014	0.123	1.237	-0.081	0.114	-0.310
22 Exterior Wall @ EL4.65 ~6.60m	40011	0.865	2.785	0.044	1.075	3.674	0.007	0.012	-0.638
	22011	3.577	2.789	-0.075	-0.128	-0.161	0.049	0.032	-0.031
	22023	1.984	-3.558	-1.991	0.092	0.423	-0.047	0.570	0.405
	32010	14.408	6.124	0.009	-2.798	-2.759	0.004	-0.008	0.040
	32020	0.445	4.720	2.524	-0.285	-1.833	-0.377	0.922	0.167
	42001	2.451	3.607	2.534	-0.371	-1.611	-0.058	-0.794	-0.254
23 Exterior Wall @ EL22.50 ~24.60m	42011	12.432	4.405	0.143	-2.975	-2.774	0.081	0.081	0.172
	24211	4.177	2.901	-0.313	0.092	0.628	0.014	-0.122	1.431
	24224	0.340	4.642	-3.562	0.871	-0.344	-0.446	-0.824	-0.417
	34210	15.323	4.794	-0.317	-2.778	-2.409	0.015	-0.011	0.104
	34220	1.721	4.437	2.297	0.980	-1.464	-0.240	1.609	0.013
24 Basemat @ Wall Below RCCV	44201	1.001	5.209	0.300	0.668	-1.698	0.337	-1.911	0.044
	90140	1.052	1.448	1.374	0.756	-0.217	-0.971	-0.682	-0.069
	90182	1.619	0.481	0.610	-0.246	-3.861	0.184	-0.141	2.769
25 Slab EL4.65m @ RCCV	90111	0.567	2.209	-0.001	-4.129	-0.522	0.050	2.860	0.127
	93140	-0.669	2.312	4.286	-0.515	-0.395	0.287	-0.135	0.111
	93182	4.229	-4.036	-1.098	-0.354	-1.829	-0.083	0.075	1.370
26 Slab EL17.5m @ RCCV	93111	-3.602	4.956	-0.257	-1.768	-0.316	-0.047	1.178	0.000
	96144	-0.269	4.712	6.965	-0.230	-0.125	0.167	-0.073	0.023
	96186	6.688	-4.125	-1.418	-0.091	-0.316	-0.048	0.016	0.347
27 Slab EL27.0m @ RCCV	96113	-8.342	2.574	-1.682	-4.481	-2.783	-0.199	1.240	-0.059
	98472	-0.778	-0.772	5.392	-0.313	0.031	-0.311	0.451	-0.561
	98514	0.397	-2.323	-1.289	-0.515	0.047	-0.042	0.045	-0.511
28 Pool Girder @ Storage Pool	98424	-9.063	-6.855	-1.452	1.316	-0.418	0.194	-5.559	-0.101
	123054	1.314	-2.832	1.430	2.281	2.120	0.027	-0.232	0.482
29 Pool Girder @ Cavity	123154	1.031	0.747	-0.407	1.925	1.145	-0.338	-0.086	0.247
	123062	-1.254	-0.148	-0.719	0.101	0.323	0.027	0.057	0.172
30 Pool Girder @ Fuel Pool	123162	-1.691	-0.032	-0.470	0.128	-0.117	-0.003	-0.151	0.085
	123067	-2.405	-6.001	-1.842	0.639	0.439	-0.117	-0.150	0.470
31 MS Tunnel Wall and Slab	123167	-2.204	-2.669	-2.246	0.268	-0.449	-0.228	-0.011	0.180
	150122	0.224	-0.515	1.901	1.053	3.140	-0.007	-0.584	0.364
	96611	-0.447	4.103	-0.332	-1.287	-7.109	-0.423	0.426	0.209
32 IC/PCCS Pool Wall in NS Direction	98614	-0.187	1.989	-0.145	-0.861	-10.477	-0.011	0.470	0.303
	125051	-0.257	-0.976	-0.150	-0.013	-0.016	-0.001	-0.024	-0.015
	125151	-0.404	-0.680	0.529	0.018	0.055	0.012	-0.030	-0.051
	125055	-0.601	0.281	0.050	0.008	0.023	0.001	0.007	0.002
	125155	-1.201	-0.035	0.047	0.008	0.037	-0.005	-0.061	0.002



**Table 6.2.4-6 Results of NASTRAN Analysis, Thermal Load
(LOCA After 72 hours: Winter) – Load Case: TLW8 –**

(Values obtained from Reference 2.1.2-e)

Location	Element ID	N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
18 Wall Below RCCV Bottom	6	0.745	-0.977	-0.895	0.238	1.920	-0.053	0.044	0.293
	13	-0.174	-4.065	-0.782	0.604	3.357	-0.002	0.023	0.785
	24	0.101	-3.765	0.212	0.594	3.314	-0.007	-0.003	0.779
19 Wall Below RCCV Mid-Height	806	1.907	-2.149	0.225	0.307	1.688	0.090	-0.068	-0.082
	813	1.360	-3.986	-0.566	0.221	1.702	-0.034	0.006	0.602
	824	1.151	-3.732	0.198	0.224	1.729	0.027	0.015	0.502
20 Wall Below RCCV Top	1606	15.858	-3.114	0.381	-0.839	-4.009	0.124	0.101	3.042
	1613	15.713	-4.649	-0.420	-1.005	-5.538	-0.011	-0.016	3.612
	1624	16.688	-4.842	-0.107	-1.115	-5.549	0.001	-0.106	3.698
21 Exterior Wall @ EL-11.50 ~10.50m	20011	3.314	4.817	0.922	0.447	1.837	0.052	-0.225	0.576
	20023	-1.453	-1.169	1.549	1.890	4.020	0.180	0.322	0.683
	30010	0.688	3.733	-0.258	1.289	4.763	-0.022	-0.031	-0.865
	30020	-0.058	-1.477	-0.392	0.021	1.209	0.144	-0.026	-0.282
	40001	-0.090	-1.141	0.056	0.039	1.330	-0.097	0.105	-0.322
22 Exterior Wall @ EL4.65 ~6.60m	40011	1.295	3.630	0.051	1.243	4.654	0.011	0.015	-0.844
	22011	5.080	4.474	-0.209	-0.175	-0.228	0.067	0.045	0.074
	22023	2.211	-3.114	-2.141	0.528	0.492	-0.052	0.386	0.393
	32010	16.739	7.724	-0.075	-2.893	-3.003	-0.001	-0.014	0.022
	32020	0.653	4.869	2.518	0.104	-1.860	-0.395	1.226	0.199
	42001	2.720	3.801	2.644	0.130	-1.563	-0.051	-0.998	-0.239
23 Exterior Wall @ EL22.50 ~24.60m	42011	14.110	5.515	0.234	-3.164	-3.046	0.073	0.090	0.169
	24211	6.073	5.669	-0.239	0.176	0.982	0.008	-0.147	1.336
	24224	1.011	5.349	-3.664	1.966	0.071	-0.637	-1.563	-0.323
	34210	21.813	5.545	-0.581	-2.903	-2.819	0.035	-0.002	-0.128
	34220	2.794	5.432	4.414	2.629	-1.178	-0.711	2.571	0.094
24 Basemat @ Wall Below RCCV	44201	1.793	6.586	0.562	2.230	-1.491	0.539	-2.967	0.044
	90140	0.838	1.691	1.751	-0.171	-1.046	-1.095	-1.135	0.139
	90182	1.908	0.687	0.488	-0.873	-5.527	0.260	-0.110	3.825
25 Slab EL4.65m @ RCCV	90111	0.733	2.908	-0.011	-5.322	-1.147	0.107	3.687	0.151
	93140	-0.383	3.018	5.804	-0.739	-0.564	0.413	-0.192	0.163
	93182	6.161	-5.154	-1.518	-0.481	-2.508	-0.114	0.105	1.903
26 Slab EL17.5m @ RCCV	93111	-4.494	6.820	-0.448	-2.369	-0.414	-0.066	1.594	0.001
	96144	0.733	5.839	8.138	-0.232	-0.178	0.174	-0.043	0.066
	96186	9.999	-4.559	-2.165	-0.150	-0.675	-0.057	0.023	0.638
27 Slab EL27.0m @ RCCV	96113	-9.165	5.149	-1.811	-4.378	-2.755	-0.237	1.010	-0.100
	98472	-3.645	-3.148	5.906	-1.729	-1.315	-0.297	0.534	-0.685
	98514	-2.902	-2.765	-1.440	-1.895	-1.503	-0.079	0.078	-0.381
28 Pool Girder @ Storage Pool	98424	-8.825	-1.775	-2.345	3.485	0.429	0.374	-5.774	-0.156
	123054	3.583	1.298	2.382	3.613	2.453	-0.343	0.113	0.317
	123154	3.638	3.575	-2.911	3.372	1.303	-0.374	-0.255	0.413
29 Pool Girder @ Cavity	123062	0.505	0.115	-1.385	3.836	3.893	0.008	0.034	0.188
	123162	1.929	0.409	-1.840	3.803	2.820	0.092	-0.288	0.644
30 Pool Girder @ Fuel Pool	123067	-2.101	-7.271	-3.005	3.592	3.540	-0.636	0.317	0.815
	123167	-0.679	-2.776	-3.132	2.749	1.834	-0.242	-0.176	0.616
31 MS Tunnel Wall and Slab	150122	0.316	-0.711	1.797	0.940	3.101	0.011	-0.551	0.426
	96611	-0.557	4.662	-0.414	-1.254	-7.116	-0.406	0.420	0.206
	98614	-0.043	0.725	-0.043	-0.850	-9.922	-0.018	0.459	0.307
32 IC/PCCS Pool Wall in NS Direction	125051	-2.425	-2.173	-0.782	0.093	0.096	-0.014	0.023	0.036
	125151	-2.083	-1.572	1.896	0.131	0.140	0.029	0.019	-0.082
	125055	-4.971	-0.309	0.162	0.019	0.097	0.004	-0.047	-0.011
	125155	-4.973	-0.680	0.046	0.014	0.094	-0.011	-0.133	0.027



**Table 6.2.4-7 Results of NASTRAN Analysis, Thermal Load
(LOCA After 72 hours: Winter) – Load Case: TWC1 –**

Location	Element ID	N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
18 Wall Below RCCV Bottom	6	0.750	-0.853	-0.897	0.196	1.921	-0.057	0.039	0.287
	13	-0.233	-4.144	-0.694	0.618	3.413	0.001	0.024	0.802
	24	-0.151	-3.791	0.237	0.643	3.574	-0.007	-0.003	0.879
19 Wall Below RCCV Mid-Height	806	1.995	-2.239	0.210	0.259	1.574	0.088	-0.079	-0.026
	813	1.447	-4.154	-0.359	0.233	1.691	-0.040	0.005	0.618
	824	1.060	-3.570	0.241	0.222	1.715	0.029	0.014	0.529
20 Wall Below RCCV Top	1606	15.594	-3.429	0.457	-0.786	-3.750	0.141	0.113	2.899
	1613	15.764	-4.938	-0.082	-0.988	-5.556	-0.015	-0.016	3.618
	1624	16.501	-4.321	-0.037	-1.113	-5.449	0.005	-0.111	3.665
21 Exterior Wall @ EL-11.50 ~10.50m	20011	3.641	5.548	1.150	0.472	1.962	0.047	-0.253	0.593
	20023	-3.153	-1.860	2.673	5.515	8.484	0.242	0.308	0.766
	30010	0.485	3.864	-0.425	1.316	4.881	-0.020	-0.034	-0.899
	30020	-0.020	-1.613	-0.431	0.029	1.170	0.143	0.006	-0.261
	40001	-0.060	-1.238	0.166	0.062	1.318	-0.091	0.095	-0.304
22 Exterior Wall @ EL4.65 ~6.60m	40011	1.097	3.829	0.018	1.284	4.867	0.012	0.014	-0.905
	22011	5.314	5.116	-0.168	-0.180	-0.189	0.074	0.040	0.126
	22023	4.072	-3.635	-4.272	-0.152	0.826	0.002	1.198	0.781
	32010	16.767	8.006	-0.288	-2.886	-2.999	-0.015	-0.012	0.019
	32020	0.547	3.903	2.128	0.032	-1.813	-0.337	1.168	0.172
	42001	2.747	2.867	2.337	0.032	-1.567	-0.029	-0.955	-0.229
23 Exterior Wall @ EL22.50 ~24.60m	42011	15.069	6.132	0.302	-3.149	-2.907	0.066	0.093	0.102
	24211	9.506	3.594	-0.774	-0.115	0.134	-0.026	-0.144	2.752
	24224	1.013	6.451	-3.718	2.325	-0.206	-0.927	-2.005	-0.574
	34210	24.186	5.676	-1.247	-2.969	-2.852	0.079	-0.002	-0.199
	34220	3.035	8.365	2.362	3.110	-1.351	-0.641	2.782	0.049
24 Basemat @ Wall Below RCCV	44201	1.528	9.601	-2.434	2.453	-1.601	0.902	-3.330	0.092
	90140	1.320	1.803	1.867	0.019	-1.169	-1.505	-1.060	0.061
	90182	1.721	0.653	0.409	-0.869	-5.630	0.355	-0.061	3.880
	90111	0.761	2.442	0.007	-5.450	-1.106	0.134	3.822	0.151
25 Slab EL4.65m @ RCCV	93140	-0.648	3.031	5.794	-0.772	-0.584	0.424	-0.194	0.167
	93182	6.162	-5.152	-1.674	-0.487	-2.535	-0.107	0.110	1.922
	93111	-4.359	6.745	-0.464	-2.455	-0.425	-0.069	1.657	0.001
26 Slab EL17.5m @ RCCV	96144	1.209	5.959	8.314	-0.377	-0.303	0.253	-0.056	0.120
	96186	10.704	-4.934	-2.716	-0.243	-1.236	-0.072	0.040	1.019
	96113	-8.560	9.054	-1.419	-4.722	-2.788	-0.276	1.225	-0.076
27 Slab EL27.0m @ RCCV	98472	-6.688	-5.372	14.755	-3.970	-2.975	-0.477	1.234	-1.689
	98514	12.327	-5.717	-3.144	-1.352	-0.396	-0.165	0.097	-0.409
	98424	-22.050	-2.417	-2.536	-1.455	-4.181	-0.018	-6.067	-0.162
28 Pool Girder @ Storage Pool	123054	-1.938	-2.515	1.566	5.417	5.584	0.162	-0.786	1.285
	123154	2.827	2.088	-1.845	4.580	2.974	-0.774	-0.233	0.669
29 Pool Girder @ Cavity	123062	-5.127	-4.093	-0.708	-0.074	0.431	0.003	-0.026	0.353
	123162	-3.908	-3.486	-2.637	-0.570	-0.433	0.167	-0.034	0.235
30 Pool Girder @ Fuel Pool	123067	-3.820	-9.165	-4.161	-2.718	-3.315	-0.123	-0.102	0.614
	123167	-2.808	-4.392	-4.025	-3.283	-3.669	-0.676	0.202	-0.166
31 MS Tunnel Wall and Slab	150122	1.806	2.306	-1.160	1.215	4.263	-0.061	-0.685	-0.069
	96611	-0.679	4.711	-0.495	-1.221	-6.974	-0.357	0.438	0.226
	98614	-0.780	9.698	-0.614	3.633	18.467	0.888	-1.338	-0.720
32 IC/PCCS Pool Wall in NS Direction	125051	-1.704	-1.534	-0.758	0.082	0.171	0.014	-0.047	0.053
	125151	-1.701	-1.207	1.885	0.196	0.283	0.076	-0.028	-0.077
	125055	-5.013	0.266	0.012	0.033	0.309	0.010	0.048	0.102
	125155	-5.698	-0.537	-0.141	-0.037	-0.038	-0.015	-0.287	0.230

Note: TWC1 is the same as Case 1 described in Appendix E of reference 2.1.2-e where the temperatures in all pools are at their respective maximum values
Results are based on the RB/FB global FE model which is used in Appendix E of "ESBWR Reactor Building Structural Design Report", Reference 2.1.2-e.



**Table 6.2.4-8 Results of NASTRAN Analysis, Thermal Load
(LOCA After 72 hours: Winter) – Load Case: TWC2 –**

Location	Element ID	N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
18 Wall Below RCCV Bottom	6	0.777	-1.002	-0.903	0.222	2.076	-0.052	0.031	0.330
	13	-0.134	-4.269	-0.724	0.645	3.605	-0.002	0.025	0.855
	24	-0.447	-4.334	0.242	0.722	4.014	-0.008	-0.002	1.036
19 Wall Below RCCV Mid-Height	806	1.929	-2.407	0.185	0.261	1.584	0.097	-0.079	-0.020
	813	1.278	-4.285	-0.364	0.220	1.678	-0.033	0.009	0.638
	824	0.973	-4.137	0.245	0.224	1.696	0.029	0.015	0.600
20 Wall Below RCCV Top	1606	15.526	-3.640	0.441	-0.800	-3.793	0.144	0.120	2.914
	1613	15.354	-5.017	-0.213	-1.004	-5.515	-0.011	-0.017	3.577
	1624	16.757	-5.008	-0.058	-1.144	-5.722	0.000	-0.109	3.770
21 Exterior Wall @ EL-11.50 ~10.50m	20011	3.731	5.662	1.177	0.526	2.180	0.050	-0.261	0.672
	20023	-3.158	-1.848	2.683	5.501	8.535	0.247	0.361	0.799
	30010	0.985	3.871	-0.230	1.327	4.995	-0.023	-0.035	-0.927
	30020	-0.034	-1.501	-0.202	-0.054	1.250	0.160	-0.026	-0.313
	40001	-0.144	-1.060	0.157	0.008	1.463	-0.106	0.156	-0.364
22 Exterior Wall @ EL4.65 ~6.60m	40011	1.179	4.287	0.085	1.373	5.367	0.012	0.017	-1.044
	22011	5.259	4.859	-0.097	-0.168	-0.136	0.075	0.038	0.174
	22023	4.107	-3.219	-4.068	-0.035	0.827	-0.036	1.170	0.775
	32010	16.212	7.215	-0.169	-2.886	-2.961	-0.002	-0.014	-0.005
	32020	0.582	5.954	2.666	0.088	-1.820	-0.375	1.205	0.191
	42001	2.797	4.972	2.460	0.101	-1.587	-0.029	-0.987	-0.231
	42011	14.879	6.153	0.377	-3.153	-2.985	0.071	0.094	0.097
23 Exterior Wall @ EL22.50 ~24.60m	24211	6.057	5.345	-0.424	-0.135	0.553	0.001	-0.058	2.235
	24224	0.072	6.913	-3.184	0.567	-0.941	-0.286	-0.787	-0.832
	34210	17.096	6.050	-0.862	-2.804	-1.534	0.069	-0.026	0.325
	34220	1.054	7.304	0.854	0.301	-1.721	-0.074	1.162	-0.066
	44201	0.237	8.327	-0.413	0.182	-1.883	0.118	-1.311	-0.022
24 Basemat @ Wall Below RCCV	90140	1.994	1.965	1.875	-0.390	-1.304	-1.455	-1.129	0.142
	90182	2.636	0.794	0.682	-1.217	-5.763	0.242	-0.072	4.038
	90111	0.974	2.561	0.009	-6.348	-1.511	0.121	4.362	0.181
25 Slab EL4.65m @ RCCV	93140	-0.856	3.117	5.805	-0.804	-0.601	0.438	-0.203	0.175
	93182	5.987	-5.139	-1.529	-0.497	-2.568	-0.116	0.109	1.951
	93111	-4.443	6.869	-0.473	-2.590	-0.453	-0.072	1.754	0.002
26 Slab EL17.5m @ RCCV	96144	0.609	5.632	8.346	-0.320	-0.229	0.199	-0.023	0.102
	96186	9.059	-6.028	-2.395	-0.171	-0.890	-0.062	0.012	0.633
	96113	-8.726	7.627	-1.638	-4.875	-2.871	-0.263	1.230	-0.078
27 Slab EL27.0m @ RCCV	98472	0.560	2.997	21.415	2.417	3.120	-1.205	1.317	-1.610
	98514	12.596	-5.530	-2.667	1.250	5.280	0.063	-0.064	-2.425
	98424	-27.788	-2.427	-2.353	1.092	-3.349	-0.131	-8.337	-0.308
28 Pool Girder @ Storage Pool	123054	-2.533	-12.587	0.553	5.558	5.234	0.165	0.381	0.217
	123154	-1.617	-4.773	2.290	5.684	3.025	-0.503	0.458	0.837
29 Pool Girder @ Cavity	123062	-7.087	-7.406	0.091	-0.429	0.232	-0.240	0.122	0.390
	123162	-6.089	-5.905	-3.162	-1.202	-0.494	0.073	0.108	0.172
30 Pool Girder @ Fuel Pool	123067	5.357	-5.116	-3.767	0.633	-0.017	-0.360	-0.406	-0.305
	123167	0.172	-1.539	-1.800	0.764	0.265	-0.025	-0.182	-0.019
31 MS Tunnel Wall and Slab	150122	1.438	2.753	-0.876	1.398	4.284	-0.070	-0.732	-0.264
	96611	-0.586	4.311	-0.426	-1.368	-7.292	-0.409	0.488	0.246
	98614	-1.738	15.030	-1.299	3.368	16.868	0.873	-1.203	-0.642
32 IC/PCCS Pool Wall in NS Direction	125051	2.182	1.406	0.841	1.141	1.454	0.062	-0.706	0.145
	125151	0.820	0.470	1.675	1.267	1.459	0.112	-0.609	-0.022
	125055	0.876	2.406	-0.406	2.535	2.933	0.001	0.149	0.312
	125155	-1.094	1.213	0.165	2.361	2.132	-0.036	-0.297	0.357

Note: TWC2 is the same as Case 2 described in Appendix E of reference 2.1.2-e where the temperatures in all pools are at their respective minimum values

Results are based on the RB/FB global FE model which is used in Appendix E of "ESBWR Reactor Building Structural Design Report", Reference 2.1.2-e.



**Table 6.2.4-9 Results of NASTRAN Analysis, Thermal Load
(LOCA After 72 hours: Winter) – Load Case: TWC3 –**

Location	Element ID	N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
18 Wall Below RCCV Bottom	6	0.670	-1.048	-0.884	0.228	2.124	-0.056	0.036	0.354
	13	-0.306	-4.407	-0.752	0.662	3.674	-0.001	0.026	0.889
	24	-0.285	-4.247	0.242	0.695	3.877	-0.007	-0.003	0.983
19 Wall Below RCCV Mid-Height	806	1.890	-2.473	0.244	0.256	1.568	0.093	-0.079	-0.014
	813	1.335	-4.389	-0.414	0.228	1.677	-0.036	0.007	0.655
	824	0.950	-4.099	0.239	0.219	1.701	0.029	0.015	0.579
20 Wall Below RCCV Top	1606	15.501	-3.673	0.459	-0.798	-3.787	0.136	0.118	2.905
	1613	15.654	-5.156	-0.193	-1.006	-5.626	-0.012	-0.017	3.634
	1624	16.479	-4.986	-0.042	-1.133	-5.563	0.004	-0.109	3.708
21 Exterior Wall @ EL-11.50 ~-10.50m	20011	3.738	5.777	1.168	0.527	2.192	0.048	-0.263	0.679
	20023	-3.155	-1.841	2.710	5.500	8.520	0.245	0.334	0.789
	30010	0.730	4.058	-0.335	1.354	5.126	-0.023	-0.036	-0.967
	30020	-0.041	-1.543	-0.341	-0.021	1.250	0.155	-0.024	-0.300
	40001	-0.093	-1.158	0.111	0.014	1.410	-0.103	0.127	-0.344
22 Exterior Wall @ EL4.65 ~-6.60m	40011	1.307	4.163	0.070	1.345	5.227	0.012	0.016	-1.006
	22011	5.283	5.071	-0.144	-0.173	-0.135	0.076	0.039	0.187
	22023	4.084	-3.312	-4.149	-0.088	0.829	-0.019	1.179	0.777
	32010	16.572	7.841	-0.233	-2.885	-2.995	-0.009	-0.013	-0.003
	32020	0.592	5.227	2.415	0.068	-1.827	-0.358	1.193	0.181
23 Exterior Wall @ EL22.50 ~-24.60m	42001	2.758	4.202	2.357	0.077	-1.569	-0.027	-0.975	-0.229
	42011	14.894	6.046	0.372	-3.154	-2.920	0.066	0.093	0.074
	24211	5.901	5.024	-0.316	-0.056	0.274	-0.060	-0.089	2.145
	24224	0.792	6.370	-3.057	1.898	-0.441	-0.919	-1.832	-0.756
	34210	21.464	5.958	-1.112	-2.937	-2.661	0.055	-0.015	-0.077
24 Basemat @ Wall Below RCCV	34220	2.091	6.897	2.213	1.928	-1.515	-0.411	2.154	0.000
	44201	1.191	8.372	0.487	1.501	-1.692	0.512	-2.493	0.019
	90140	1.635	1.927	1.899	-0.398	-1.472	-1.441	-1.162	0.167
25 Slab EL4.65m @ RCCV	90182	2.138	0.785	0.554	-1.150	-6.045	0.298	-0.075	4.162
	90111	0.921	2.823	0.012	-6.151	-1.473	0.120	4.236	0.173
	93140	-0.743	3.062	5.791	-0.806	-0.606	0.440	-0.202	0.176
26 Slab EL17.5m @ RCCV	93182	6.126	-5.162	-1.596	-0.505	-2.611	-0.115	0.112	1.985
	93111	-4.387	6.774	-0.463	-2.578	-0.450	-0.072	1.745	0.002
	96144	0.976	5.917	8.290	-0.370	-0.287	0.243	-0.049	0.114
27 Slab EL27.0m @ RCCV	96186	10.139	-5.353	-2.466	-0.247	-1.241	-0.077	0.035	0.981
	96113	-8.614	7.958	-1.542	-4.967	-2.864	-0.274	1.328	-0.073
	98472	-10.555	-5.730	14.877	-3.631	-2.841	-0.701	1.393	-1.882
28 Pool Girder @ Storage Pool	98514	19.208	-5.647	-2.587	1.045	2.953	-0.194	0.107	-1.118
	98424	-26.560	-3.101	-2.068	-0.369	-4.549	-0.180	-8.003	-0.294
	123054	-0.796	-10.849	0.720	6.148	6.064	0.167	0.364	0.243
29 Pool Girder @ Cavity	123154	2.563	-3.589	1.883	6.336	3.560	-0.289	0.575	0.983
	123062	-3.492	-7.610	-0.329	0.235	0.976	-0.143	0.144	0.349
	123162	-2.959	-6.337	-3.847	-0.450	0.157	0.052	0.056	0.215
30 Pool Girder @ Fuel Pool	123067	-1.268	-8.891	-3.861	-5.866	-6.788	0.001	-0.270	0.070
	123167	-0.187	-3.829	-3.108	-6.192	-5.622	-0.821	0.411	-0.590
	150122	1.442	2.727	-0.937	1.383	4.317	-0.079	-0.726	-0.235
31 MS Tunnel Wall and Slab	96611	-0.607	4.325	-0.440	-1.309	-7.168	-0.388	0.469	0.239
	98614	-1.663	14.438	-1.244	3.396	16.820	0.884	-1.208	-0.639
	125051	-1.590	-0.135	-1.056	-0.896	-0.957	0.021	-0.132	0.072
32 IC/PCCS Pool Wall in NS Direction	125151	-1.514	-0.093	1.642	-0.781	-0.803	0.065	-0.132	-0.123
	125055	-5.687	0.084	-0.180	-0.145	0.088	0.019	0.049	0.095
	125155	-6.471	-0.673	-0.245	-0.209	-0.233	-0.039	-0.277	0.218

Note: TWC3 is the same as Case 3 described in Appendix E of reference 2.1.2-e where the temperatures in individual pools are at either maximum or minimum values
Results are based on the RB/FB global FE model which is used in Appendix E of "ESBWR Reactor Building Structural Design Report", Reference 2.1.2-e.



**Table 6.2.4-10 Results of NASTRAN Analysis, Thermal Load
(LOCA After 72 hours: Winter) – Load Case: TWC4 –**

Location	Element ID	N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
18 Wall Below RCCV Bottom	6	0.675	-1.178	-1.016	0.262	2.320	-0.051	0.030	0.412
	13	-0.242	-4.702	-0.809	0.704	3.952	-0.005	0.028	0.972
	24	-0.604	-4.755	0.250	0.774	4.320	-0.008	-0.002	1.144
19 Wall Below RCCV Mid-Height	806	1.846	-2.644	0.093	0.261	1.580	0.104	-0.080	-0.008
	813	1.111	-4.721	-0.446	0.212	1.667	-0.030	0.012	0.690
	824	0.835	-4.606	0.243	0.222	1.671	0.028	0.016	0.650
20 Wall Below RCCV Top	1606	15.533	-3.964	0.374	-0.813	-3.869	0.153	0.120	2.938
	1613	15.095	-5.406	-0.355	-1.031	-5.552	-0.012	-0.016	3.584
	1624	16.752	-5.619	-0.068	-1.167	-5.895	-0.002	-0.104	3.825
21 Exterior Wall @ EL-11.50 ~10.50m	20011	3.795	5.903	1.189	0.577	2.392	0.051	-0.270	0.752
	20023	-3.161	-1.832	2.700	5.482	8.575	0.250	0.388	0.824
	30010	1.280	4.177	-0.135	1.383	5.346	-0.027	-0.038	-1.025
	30020	-0.047	-1.423	-0.094	-0.107	1.338	0.171	-0.059	-0.354
	40001	-0.189	-0.974	0.108	-0.041	1.567	-0.119	0.190	-0.408
22 Exterior Wall @ EL4.65 ~6.60m	40011	1.324	4.622	0.125	1.434	5.725	0.012	0.019	-1.145
	22011	5.179	4.982	-0.111	-0.165	-0.142	0.077	0.040	0.190
	22023	4.118	-2.984	-0.090	0.017	0.830	-0.042	1.153	0.774
	32010	16.202	7.169	-0.100	-2.889	-2.913	0.008	-0.015	-0.074
	32020	0.664	7.188	3.201	0.151	-1.847	-0.423	1.253	0.215
	42001	2.788	6.244	2.827	0.185	-1.584	-0.044	-1.022	-0.240
	42011	14.344	6.174	0.394	-3.161	-3.049	0.074	0.093	0.087
23 Exterior Wall @ EL22.50 ~24.60m	24211	4.557	6.000	-0.347	-0.071	0.612	0.027	-0.053	1.561
	24224	0.121	7.006	-4.004	0.358	-0.926	-0.198	-0.590	-0.758
	34210	15.370	6.254	-0.526	-2.754	-1.179	0.038	-0.021	0.478
	34220	0.813	6.354	1.257	0.023	-1.654	0.041	0.995	-0.089
	44201	0.441	7.044	0.691	-0.119	-1.881	0.038	-1.159	-0.037
24 Basemat @ Wall Below RCCV	90140	2.217	2.128	1.916	-0.818	-1.578	-1.423	-1.283	0.195
	90182	3.148	0.954	0.859	-1.590	-6.404	0.183	-0.090	4.451
	90111	1.131	2.903	0.021	-7.036	-1.884	0.104	4.764	0.201
25 Slab EL4.65m @ RCCV	93140	-0.910	3.162	5.824	-0.837	-0.625	0.452	-0.213	0.181
	93182	5.932	-5.098	-1.432	-0.529	-2.714	-0.128	0.114	2.071
	93111	-4.509	6.889	-0.465	-2.694	-0.475	-0.074	1.828	0.003
26 Slab EL17.5m @ RCCV	96144	0.330	5.674	8.334	-0.320	-0.220	0.183	-0.022	0.097
	96186	8.414	-6.391	-2.245	-0.169	-0.866	-0.064	0.009	0.591
	96113	-9.043	4.914	-1.906	-4.765	-2.896	-0.247	1.068	-0.101
27 Slab EL27.0m @ RCCV	98472	-0.712	2.508	15.854	2.844	3.563	-1.727	1.485	-1.701
	98514	8.714	-4.774	-2.722	1.284	5.685	0.103	-0.091	-2.673
	98424	-15.856	5.965	-3.125	15.820	11.004	0.128	-6.566	-0.270
28 Pool Girder @ Storage Pool	123054	9.857	-7.176	3.794	0.061	-0.484	-0.222	0.790	-0.570
	123154	7.646	-1.589	2.072	0.291	0.127	-0.235	0.262	0.022
29 Pool Girder @ Cavity	123062	11.194	0.038	-2.026	-0.395	0.719	0.207	1.138	-0.117
	123162	7.371	0.069	-1.416	-0.059	0.546	-0.247	0.304	-0.082
30 Pool Girder @ Fuel Pool	123067	7.387	-5.704	-5.204	0.309	-0.082	-0.083	-0.415	-0.377
	123167	4.800	-1.367	-2.400	0.306	0.335	0.026	-0.128	0.066
31 MS Tunnel Wall and Slab	150122	0.742	4.103	-0.960	1.295	3.836	0.103	-0.663	-0.248
	96611	-0.506	3.602	-0.370	-1.578	-7.780	-0.504	0.546	0.261
	98614	-0.406	3.864	-0.323	2.971	17.180	0.787	-1.065	-0.522
32 IC/PCCS Pool Wall in NS Direction	125051	3.473	-2.171	0.893	-0.574	-0.630	0.049	-0.282	-0.058
	125151	1.753	-1.442	-0.967	-0.439	-0.226	-0.016	-0.265	-0.069
	125055	6.938	0.773	-0.207	0.007	-0.199	-0.001	0.298	0.181
	125155	3.393	0.481	0.012	0.006	-0.149	-0.010	0.012	-0.083

Note: TWC4 is the same as Case 4 described in Appendix E of reference 2.1.2-e where the temperatures in all pools are at 0°C

Results are based on the RB/FB global FE model which is used in Appendix E of "ESBWR Reactor Building Structural Design Report", Reference 2.1.2-e.



**Table 6.2.4-11 Results of NASTRAN Analysis, Site-Specific Seismic Load
(Horizontal: North to South Direction)**

Location	Element ID	N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
18 Wall Below RCCV Bottom	6	-0.783	-1.624	-0.038	0.162	1.122	0.025	-0.037	0.414
	13	0.522	1.176	-0.115	0.157	0.785	-0.009	0.013	0.205
	24	0.758	3.600	0.062	0.072	0.397	0.000	0.000	0.021
19 Wall Below RCCV Mid-Height	806	-1.220	-2.023	-0.301	-0.030	0.015	0.051	0.010	-0.010
	813	0.027	1.363	-0.375	-0.005	-0.018	0.029	0.005	0.063
	824	0.969	3.912	0.024	-0.007	-0.032	0.000	0.002	0.062
20 Wall Below RCCV Top	1606	-1.574	-2.018	-1.434	-0.048	-0.075	-0.033	0.025	-0.069
	1613	-0.179	1.334	-1.602	-0.080	-0.300	-0.016	0.010	0.059
	1624	1.266	3.651	-0.082	-0.034	-0.254	-0.003	-0.002	0.089
21 Exterior Wall @ EL-11.50 ~10.50m	20011	0.092	-0.658	0.266	0.593	2.400	0.008	-0.008	0.889
	20023	-0.024	-0.479	-0.045	-0.317	0.400	0.065	0.427	0.293
	30010	1.085	0.430	-0.564	0.100	0.568	-0.002	-0.008	-0.153
	30020	-0.001	0.896	0.105	-0.014	0.299	0.011	-0.100	-0.091
	40001	0.008	0.890	-0.267	-0.048	0.225	-0.020	0.056	-0.080
22 Exterior Wall @ EL4.65 ~6.60m	40011	0.684	0.478	0.028	-0.005	0.031	0.001	-0.002	0.036
	22011	-0.409	-4.278	1.316	0.110	0.748	0.071	-0.043	0.598
	22023	-0.129	-3.435	0.177	-0.124	0.208	-0.115	0.282	0.131
	32010	-0.477	0.875	-2.847	-0.010	-0.020	-0.002	-0.004	-0.012
	32020	0.107	4.483	-1.209	0.109	0.014	-0.005	0.092	0.008
	42001	0.154	4.717	-0.785	0.135	-0.066	-0.001	-0.073	0.027
23 Exterior Wall @ EL22.50 ~24.60m	42011	1.001	2.927	0.147	-0.032	-0.207	0.008	0.000	0.181
	24211	-0.878	-4.111	0.148	-0.125	-0.314	-0.029	-0.002	0.740
	24224	-0.319	-7.118	0.933	0.671	1.055	-0.249	0.228	1.171
	34210	-0.945	0.276	-3.286	-0.016	-0.078	0.000	0.023	-0.028
	34220	-0.087	2.292	-0.946	-0.075	0.037	0.018	-0.060	-0.016
24 Basemat @ Wall Below RCCV	44201	-0.140	2.787	-0.468	-0.044	0.034	-0.013	0.086	-0.006
	90140	2.760	0.669	-0.723	-2.536	-1.105	0.361	-0.675	0.793
	90182	1.990	0.248	-0.604	-0.522	0.386	0.127	0.010	-0.090
25 Slab EL4.65m @ RCCV	90111	0.282	1.008	-0.031	1.675	0.096	0.154	-1.230	-0.110
	93140	-1.696	0.303	-0.213	-0.204	-0.125	0.095	-0.046	0.062
	93182	-0.251	-0.090	0.093	-0.006	-0.003	0.010	0.005	0.012
26 Slab EL17.5m @ RCCV	93111	-0.141	0.204	-0.030	0.349	0.060	0.012	-0.248	0.001
	96144	-0.554	0.255	0.093	-0.173	-0.143	0.099	-0.037	0.042
	96186	-0.427	-0.127	0.132	-0.003	-0.012	0.010	0.010	0.008
27 Slab EL27.0m @ RCCV	96113	0.046	-0.904	-0.097	1.094	0.112	0.012	-0.905	-0.108
	98472	0.655	-0.206	-0.040	-0.206	-0.213	0.071	-0.021	0.039
	98514	-0.509	-0.071	0.098	-0.027	0.040	0.057	0.035	-0.006
28 Pool Girder @ Storage Pool	98424	0.940	-1.110	0.070	-0.825	-0.252	0.087	0.954	0.076
	123054	0.078	1.309	-0.293	-0.042	-0.015	0.028	0.013	0.002
	123154	-0.864	0.481	-0.105	-0.056	-0.017	0.005	-0.009	0.001
29 Pool Girder @ Cavity	123062	-0.152	-0.096	0.234	-0.001	0.004	-0.008	0.001	0.005
	123162	-0.462	-0.123	0.274	-0.007	0.003	-0.007	-0.010	-0.001
30 Pool Girder @ Fuel Pool	123067	-0.535	0.362	0.423	0.065	0.049	0.012	0.020	0.033
	123167	-0.479	-0.107	0.751	0.025	0.023	0.001	0.004	0.005
31 MS Tunnel Wall and Slab	150122	-0.029	0.276	-0.061	-0.060	-0.205	-0.009	0.011	-0.032
	96611	-0.002	-0.057	0.005	-0.169	-0.550	-0.047	0.067	0.024
	98614	0.048	-0.362	0.037	0.174	0.743	0.063	-0.058	-0.025
32 IC/PCCS Pool Wall in NS Direction	125051	0.017	0.133	0.376	0.004	0.004	0.000	0.004	-0.010
	125151	-0.110	0.133	0.414	0.009	0.006	0.000	0.006	-0.003
	125055	-0.115	-0.023	0.460	-0.005	-0.006	0.003	-0.003	-0.003
	125155	-0.221	-0.004	0.470	0.000	0.005	0.003	0.005	-0.004

Note: Results are based on the RB/FB global FE model which is used in Appendix E of "ESBWR Reactor Building Structural Design Report", Reference 2.1.2-e.



**Table 6.2.4-12 Results of NASTRAN Analysis, Site-Specific Seismic Load
(Horizontal: East to West Direction)**

Location	Element ID	N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
18 Wall Below RCCV Bottom	6	-1.362	-3.188	0.325	0.163	0.904	0.007	-0.033	0.385
	13	-1.290	-3.599	-0.300	0.128	0.707	0.012	-0.016	0.334
	24	-0.156	-0.336	-1.107	-0.013	-0.020	-0.009	0.014	0.008
19 Wall Below RCCV Mid-Height	806	-0.523	-3.092	0.837	0.029	0.036	0.035	0.007	-0.032
	813	-1.029	-3.722	-0.421	0.023	0.025	0.019	0.000	0.063
	824	-0.085	-0.368	-1.651	-0.003	-0.002	-0.008	-0.004	-0.011
20 Wall Below RCCV Top	1606	-0.366	-2.610	1.656	-0.001	-0.153	0.019	0.006	0.059
	1613	-0.805	-3.269	-0.482	-0.059	-0.366	0.017	-0.003	0.113
	1624	-0.112	-0.330	-2.605	0.003	0.020	-0.038	0.016	-0.004
21 Exterior Wall @ EL-11.50 ~10.50m	20011	0.104	0.367	1.984	0.001	-0.207	-0.018	-0.021	-0.055
	20023	-0.016	-1.243	0.171	-0.115	0.079	0.040	0.153	0.095
	30010	-0.635	-0.216	-0.743	0.163	0.762	0.015	0.012	-0.232
	30020	-0.102	-0.927	-0.550	0.040	-0.084	-0.006	-0.008	0.045
	40001	0.061	-1.082	-0.238	-0.107	-0.318	-0.001	-0.133	0.070
22 Exterior Wall @ EL4.65 ~6.60m	40011	0.009	-0.030	-1.125	-0.020	-0.069	-0.006	-0.016	0.027
	22011	-0.104	-1.029	3.564	-0.014	-0.010	-0.004	-0.011	-0.017
	22023	-0.323	-3.988	2.727	0.085	0.080	-0.032	0.027	0.047
	32010	-0.595	-2.880	-0.678	0.023	0.132	0.013	0.000	-0.202
	32020	-0.093	-3.812	-1.603	-0.041	0.074	0.007	-0.048	-0.040
	42001	-0.085	-3.676	-2.018	-0.062	-0.030	0.010	0.029	0.012
23 Exterior Wall @ EL22.50 ~24.60m	42011	-0.066	0.437	-3.545	-0.002	-0.007	-0.012	-0.004	0.000
	24211	-0.012	0.063	3.573	0.006	0.015	-0.008	0.000	0.002
	24224	-0.371	-5.221	3.445	0.319	0.211	-0.015	-0.223	0.158
	34210	-0.182	-1.740	-0.569	-0.107	-0.609	0.007	0.004	-0.191
	34220	0.115	-2.079	-1.749	-0.050	-0.100	0.006	0.013	0.009
24 Basemat @ Wall Below RCCV	44201	-0.059	-2.191	-2.196	-0.016	-0.007	-0.033	0.026	-0.017
	90140	0.090	-0.409	-1.411	-1.245	-1.547	1.181	-1.254	1.198
	90182	-0.890	-0.003	-0.539	-0.538	-1.570	0.223	-0.026	1.660
25 Slab EL4.65m @ RCCV	90111	0.044	-0.185	0.345	0.059	-0.084	-0.381	0.065	0.451
	93140	-0.082	-0.051	0.108	-0.132	-0.116	0.077	-0.040	0.028
	93182	-0.099	0.065	0.096	-0.093	-0.469	-0.016	0.020	0.392
26 Slab EL17.5m @ RCCV	93111	0.094	0.021	-0.148	-0.007	0.004	0.000	-0.001	-0.003
	96144	0.080	0.194	0.113	-0.112	-0.112	0.074	-0.039	0.016
	96186	0.192	-0.068	0.160	-0.105	-0.544	-0.020	0.026	0.445
27 Slab EL27.0m @ RCCV	96113	-0.018	0.110	-0.595	-0.069	-0.017	-0.045	0.043	-0.033
	98472	0.062	0.772	0.239	-0.053	-0.060	0.025	0.055	-0.076
	98514	0.363	-0.183	0.348	-0.167	-1.101	0.002	0.020	0.701
28 Pool Girder @ Storage Pool	98424	-0.202	0.194	3.448	-0.001	-0.023	0.123	-0.042	-0.040
	123054	-0.250	-0.289	-0.162	-0.197	-0.091	0.054	-0.023	-0.061
	123154	0.240	-0.389	-0.563	-0.156	-0.010	0.067	-0.017	-0.004
29 Pool Girder @ Cavity	123062	0.197	-0.814	-0.044	-0.038	-0.026	0.009	0.028	-0.001
	123162	0.256	-0.817	-0.052	-0.027	0.002	-0.008	0.028	-0.021
30 Pool Girder @ Fuel Pool	123067	-0.049	-0.123	-0.097	-0.090	-0.092	-0.051	-0.014	-0.075
	123167	0.276	-0.388	0.341	-0.065	0.017	-0.041	0.013	-0.008
31 MS Tunnel Wall and Slab	150122	0.005	-0.093	0.022	0.024	0.074	0.029	-0.005	-0.158
	96611	-0.017	0.048	0.029	0.012	0.055	-0.047	0.000	0.054
	98614	-0.008	-0.006	0.003	-0.023	-0.092	-0.262	0.023	0.011
32 IC/PCCS Pool Wall in NS Direction	125051	0.083	-0.069	0.125	0.009	0.008	0.004	0.003	-0.002
	125151	0.042	-0.061	0.009	0.008	0.000	0.005	0.004	0.004
	125055	0.221	-0.010	-0.058	-0.001	0.007	0.001	0.000	-0.001
	125155	0.194	-0.013	-0.059	-0.002	0.000	-0.001	-0.004	0.007

Note: Results are based on the RB/FB global FE model which is used in Appendix E of "ESBWR Reactor Building Structural Design Report", Reference 2.1.2-e.



**Table 6.2.4-13 Results of NASTRAN Analysis, Site-Specific Seismic Load
(Vertical: Upward Direction)**

Location	Element ID	N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
18 Wall Below RCCV Bottom	6	0.390	-6.640	0.527	-0.361	-2.351	0.013	-0.038	-0.756
	13	0.501	-5.422	0.409	-0.612	-3.320	0.005	-0.006	-1.021
	24	0.458	-6.058	-0.161	-0.651	-3.531	0.006	-0.002	-1.060
19 Wall Below RCCV Mid-Height	806	-0.001	-5.924	0.178	0.011	-0.049	-0.022	0.007	-0.115
	813	-0.174	-5.442	0.360	-0.026	-0.047	-0.010	-0.019	-0.214
	824	-0.129	-6.106	-0.147	-0.033	-0.002	-0.007	0.001	-0.232
20 Wall Below RCCV Top	1606	-0.709	-5.409	0.135	0.187	1.012	0.008	-0.003	-0.344
	1613	-0.841	-5.281	0.271	0.181	1.101	0.007	0.000	-0.395
	1624	-0.755	-5.937	-0.093	0.184	1.094	0.000	-0.006	-0.384
21 Exterior Wall @ EL-11.50 ~10.50m	20011	-0.571	-3.328	-0.340	-0.035	0.005	0.004	0.048	0.042
	20023	0.005	-1.108	-0.390	0.106	-0.219	-0.007	-0.084	-0.134
	30010	-0.160	-1.781	0.051	-0.371	-1.965	0.016	0.003	0.460
	30020	-0.053	-0.988	-0.201	0.187	-0.567	-0.058	0.127	0.191
	40001	-0.049	-1.028	0.164	0.191	-0.576	0.058	-0.127	0.186
22 Exterior Wall @ EL4.65 ~6.60m	40011	-0.323	-2.306	0.001	-0.423	-2.233	-0.011	-0.001	0.530
	22011	0.185	-3.014	0.654	-0.007	0.056	0.001	-0.021	0.061
	22023	0.005	-1.557	-0.255	-0.117	0.001	-0.014	0.078	0.015
	32010	-0.033	-1.772	0.059	0.000	0.039	0.003	0.000	-0.025
	32020	-0.049	-1.973	-0.093	-0.063	-0.004	-0.006	-0.056	-0.009
	42001	-0.058	-2.061	-0.089	-0.081	-0.005	0.003	0.041	-0.002
23 Exterior Wall @ EL22.50 ~24.60m	42011	-0.319	-2.366	-0.078	-0.002	0.037	-0.004	0.003	-0.020
	24211	-0.245	-1.884	0.122	-0.082	-0.546	0.006	-0.002	-0.047
	24224	-0.060	-1.302	0.460	0.055	-0.028	-0.055	-0.067	-0.007
	34210	-0.054	-0.868	0.063	-0.009	-0.116	0.001	0.006	-0.015
	34220	0.040	-0.964	-0.213	0.053	-0.040	0.001	0.044	0.001
24 Basemat @ Wall Below RCCV	44201	0.026	-1.163	-0.393	0.046	-0.021	0.010	-0.047	-0.002
	90140	0.292	-0.734	-0.477	-2.136	-1.628	3.174	-1.481	1.751
	90182	-0.623	-0.317	-0.066	0.837	-2.260	-0.383	0.221	0.666
	90111	-0.387	-0.896	0.058	-2.068	1.015	-0.489	0.713	0.115
25 Slab EL4.65m @ RCCV	93140	-0.089	0.124	0.064	0.052	0.072	-0.045	0.102	-0.083
	93182	0.115	0.099	0.018	0.025	0.072	0.006	-0.007	-0.132
	93111	0.070	0.144	-0.026	0.101	0.028	0.004	-0.130	-0.003
26 Slab EL17.5m @ RCCV	96144	-0.171	0.227	0.164	0.028	0.034	-0.026	0.094	-0.070
	96186	0.258	-0.093	-0.035	-0.007	-0.053	0.003	-0.004	-0.007
	96113	-0.076	0.554	-0.083	-0.296	0.011	0.011	0.337	0.034
27 Slab EL27.0m @ RCCV	98472	0.381	-0.046	0.256	0.418	0.684	-0.574	0.444	-0.521
	98514	0.135	0.039	0.068	0.061	0.301	0.046	-0.023	-0.205
	98424	-0.230	0.416	-0.030	2.488	0.577	0.020	-1.510	-0.116
28 Pool Girder @ Storage Pool	123054	0.490	-3.033	-1.047	0.034	0.033	0.088	0.014	0.035
	123154	1.605	-0.550	-0.833	0.044	-0.004	0.122	0.057	-0.009
29 Pool Girder @ Cavity	123062	0.502	0.763	0.407	-0.053	-0.286	0.025	0.018	-0.128
	123162	-1.839	0.280	0.213	-0.096	-0.088	0.019	0.106	0.032
30 Pool Girder @ Fuel Pool	123067	0.459	-2.959	1.895	0.005	-0.068	-0.104	-0.129	-0.023
	123167	0.647	-0.692	1.644	0.019	-0.002	0.013	-0.045	-0.010
31 MS Tunnel Wall and Slab	150122	-0.029	0.142	0.341	0.021	0.007	0.026	-0.015	-0.074
	96611	-0.017	0.396	-0.019	0.065	-0.289	-0.103	-0.109	0.035
	98614	-0.024	-0.249	-0.021	0.016	-0.565	-0.065	-0.057	0.036
32 IC/PCCS Pool Wall in NS Direction	125051	-0.140	-1.646	-1.201	0.006	-0.074	-0.003	0.006	-0.055
	125151	-0.160	-0.650	-0.995	0.001	-0.011	-0.006	0.015	-0.003
	125055	0.057	-0.200	-0.105	-0.024	-0.137	0.004	-0.045	-0.088
	125155	-0.704	-0.139	-0.088	0.006	0.034	0.007	0.046	-0.051

Note: Results are based on the RB/FB global FE model which is used in Appendix E of "ESBWR Reactor Building Structural Design Report", Reference 2.1.2-e.

**Table 6.3.1-1 Load Combinations and Acceptance Criteria for Safety-Related Reinforced Concrete Structures**

Category	Combination ^{*2} No.	Load ^{*1}													Acceptance Criteria ^{*5}
		D	F	L	H	Pa ^{*3}	To	Ta ^{*3}	E'	W	Wt	Ro	Ra	Y ^{*4}	
Normal	RB-C1	1.4	1.4	1.7	1.7	-	-	-	-	-	-	1.7	-	-	U
	RB-C2	1.05	1.05	1.3	1.3	-	1.3	-	-	-	-	1.3	-	-	U
Severe Environmental	RB-C3	1.4	1.4	1.7	1.7	-	-	-	-	1.7	-	1.7	-	-	U
	RB-C4	1.05	1.05	1.3	1.3	-	1.3	-	-	1.3	-	1.3	-	-	U
	RB-C5	1.2	1.2	-	-	-	-	-	-	1.7	-	-	-	-	U
Extreme Environmental	RB-C6	1.0	1.0	1.0	1.0	-	1.0	-	1.0	-	-	1.0	-	-	U
	RB-C7	1.0	1.0	1.0	1.0	-	1.0	-	-	-	1.0	1.0	-	-	U
Abnormal	RB-C8	1.0	1.0	1.0	1.0	1.5	-	1.0	-	-	-	-	1.0	-	U
Abnormal/Extreme Environmental	RB-C9	1.0	1.0	1.0	1.0	1.0	-	1.0	1.0	-	-	-	1.0	1.0	U

Note :

- *1: D = Dead loads
 L = Live loads (For the roof, Roof Live loads or Snow loads or Rain loads each acting independently.)
 H = Lateral soil pressure loads
 To = Thermal loads during the normal operation
 E' = Seismic loads (SSE)
 W = Wind loads (basic wind)
 Ro = Pipe reaction loads during the normal operation
 Y = High energy pipe rupture
- F = Hydrostatic pressure loads
 Pa = Pressure loads during LOCA
 Ta = Thermal loads during LOCA
 Wt = Wind loads (tornado wind)
 Ra = Pipe reaction loads during LOCA
- *2: For any load combination, where any load reduces the effects of other loads, the corresponding coefficient for that load shall be taken as 0.9 if it can be demonstrated that the load is always present or occurs simultaneously with the other loads. Otherwise, the coefficient for that load shall be taken as zero.
- *3: Because Pa and Ta are time-dependent loads, their effects are superimposed accordingly.
- *4: Y includes Yj, Ym and Yr. The maximum value of Y including an appropriate DLF shall be used, unless an appropriate time history analysis is performed to justify otherwise.
- *5: U = Section strength required to resist design loads based on the strength design method per ACI 349-01 and in SRP 3.8.4 Section II.3.



Table 6.3.1-2 Load Combinations, Load Factors and Acceptance Criteria for Reinforced Concrete Containment

Description	No. *2	Load Conditions*1																Acceptance Criteria*6
		D	L	Pt	Po	Pa*3	Tt	To	Ta*3	E*7	W	W'	Ro	Ra	Y*4	SRV*7	LOCA**7	
Service																		
Test	CV-1	1.0	1.0	1.0	-	-	1.0	-	-	-	-	-	-	-	-	-	-	S
Construction	CV-2	1.0	1.0	-	-	-	-	1.0	-	-	1.0	-	-	-	-	-	-	S
Normal	CV-3	1.0	1.0	-	1.0	-	-	1.0	-	-	-	-	1.0	-	-	1.0	-	S
Factored																		
Severe Environmental	CV-4	1.0	1.3	-	1.0	-	-	1.0	-	-	1.5	-	1.0	-	-	1.3	-	U
Extreme Environmental	CV-5	1.0	1.0	-	1.0	-	-	1.0	-	1.0	-	-	1.0	-	-	1.0	-	U
	CV-6	1.0	1.0	-	1.0	-	-	1.0	-	-	-	1.0	1.0	-	-	1.0	-	U
Abnormal	CV-7	1.0	1.0	-	-	1.5	-	-	1.0	-	-	-	-	1.0	-	1.25	Note*5	U
	CV-8	1.0	1.0	-	-	1.0	-	-	1.0	-	-	-	-	1.25	-	1.0	Note*5	U
	CV-9	1.0	1.0	-	-	1.25	-	-	1.0	-	-	-	-	1.0	-	1.25	Note*5	U
Abnormal/Severe Environmental	CV-10	1.0	1.0	-	-	1.25	-	-	1.0	-	1.25	-	-	1.0	-	1.0	Note*5	U
Abnormal/Extreme Environmental	CV-11	1.0	1.0	-	-	1.0	-	-	1.0	1.0	-	-	-	1.0	1.0	1.0	Note*5	U

Notes:

- *1: The loads are described in Section 6. The allowable stresses of concrete and reinforcing steel shall be in accordance with ASME Code Section III, Division 2, Subsection CC-3400 (except for tangential shear stress carried by orthogonal reinforcement which shall be limited to 4.41 MPa (639 psi) for factored load combinations). Inclined reinforcement shall not be used to resist tangential shear.
- *2: For any load combination, if the effect of any load component (other than D) reduces the combined load, then the load component is deleted from the load combination.
- *3: Because Pa, Ta, SRV and LOCA are time-dependent loads, their effects are superimposed accordingly.
- *4: Y includes Yj, Ym and Yr.
- *5: LOCA loads, CO, CHUG and PS are time-dependant loads for which DLF may be used. The sequence of occurrence is shown in Figure 5.2.3-2. The load factor for LOCA loads shall be the same as the corresponding pressure load Pa. LOCA loads shall include hydrostatic pressure (with a load factor of 1.0) due to containment flooding.
- *6: S = Allowable Stress as in ASME Section III, Div. 2, Subsection CC-3430 for Service Load Combination. U = Allowable Stress as in ASME Section III, Div. 2, Subsection CC-3420 for Factored Load Combination.
- *7: The peak responses of dynamic loads do not occur at the same instant. SRSS method to combine peak dynamic responses is acceptable for concrete structures.



Table 6.3.1-3 Load Combinations and Acceptance Criteria for Safety-Related Steel Structures

Category	Combination No.	Load											Acceptance Criteria ^{*2}
		D	L	Pa	To	Ta	E'	W	Wt	Ro	Ra	Y ^{*1}	
Normal	RB-S1	1.0	1.0	-		-	-	-	-	-	-	-	S
	RB-S2	1.0	1.0	-	1.0	-	-	-	-	1.0	-	-	S (a)
Severe Environmental	RB-S3	1.0	1.0	-		-	-	1.0	-	-	-	-	S
	RB-S4	1.0	1.0	-	1.0	-	-	1.0	-	1.0	-	-	S (a)
Extreme Environmental	RB-S5	1.0	1.0	-	1.0	-	1.0	-	-	1.0	-	-	1.6S (b) (c)
	RB-S6	1.0	1.0	-	1.0	-	-	-	1.0	1.0	-	-	1.6S (b) (c)
Abnormal	RB-S7	1.0	1.0	1.0	-	1.0	-	-	-	-	1.0	-	1.6S (b) (c)
Abnormal/Extreme Environmental	RB-S8	1.0	1.0	1.0	-	1.0	1.0	-	-	-	1.0	1.0	1.7S (b) (c)

Note :
D = Dead loads
L = Live loads (For the roof, Roof Live loads or Snow loads or Rain loads each acting independently.)
Pa = Pressure loads during LOCA
To = Thermal loads during the normal operation
Ta = Thermal loads during LOCA
E' = Seismic loads (SSE)
W = Wind loads (basic wind)
Wt = Wind loads (tornado wind)
Ro = Pipe reaction loads during the normal operation
Ra = Pipe reaction loads during LOCA
Y = High energy pipe rupture

*1: Y includes Y_j , Y_m and Y_r . The maximum values of Y including an appropriate DLF shall be used, unless an appropriate time history analysis is performed to justify otherwise.

*2: Allowable elastic working stress (S) is the allowable stress limit specified in Part 1 of Reference 2.2-c.

- (a) For primary plus secondary stress, the allowable limits are increased by a factor of 1.5.
- (b) Stress limit coefficient in shear shall not exceed 1.4 in members and bolts.
- (c) Stress limit coefficient where axial compression exceeds 20% of nominal allowable, shall be 1.5 for load combination 5, 6, 7, and be 1.6 for load combination 8.

Table 6.3.2-1 Detail Load Combinations for RB Design

		Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Remarks
		Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		
		Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		
		Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		
		Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		Remarks
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load		Thermal Load		Hydrodynamic Load		Wired Load		Tensile Load		Tensile Load		
Core Load</												

Note

- *1: GDCS Pool Water Depth is 4.48 m.
*2: GDCS Pool Water Depth is 0.792 mm.

Dynamic loads, i.e. seismic loads and hydrodynamic loads, are combined according to the SRSS method, as specified in Section 6.3.2 of Reference 2.1.2-m

Opposite signs of stresses due to the hydrodynamic load or combination of hydrodynamic and seismic load to the other loads is considered. In that case, 500 is added to the original LOAD ID.

For acceptance criteria, S = Allowable Stress as in ASME Section III, Div. 2, Subsection CC-3430 for Service Load Combination. U = Allowable Stress as in ASME Section III, Div. 2, Subsection CC-3420 for Factored Load Combination.

For unit load cases which are shaded in the table, the results of the stress analysis are based on the RB/FB global FE model which is used in Appendix E of the "ESBWR Reactor Building Structural Design Report", Reference 2.1.2-e.

Table 6.3.2-1 Detail Load Combinations for RB Design (Continued)

Case	Description	Dead Load	Live Load	Pressure Load										Thermal Load										Seismic Load										Hydrodynamic Load										Wind Load										Tsunami Load																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
				LOCA										LOCA (ERD Conditions)*1										LOCA Flooding										LOCA & LOFC										SPT LOPF										Reaction										Wind Load										Tsunami Load																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
				Test (ASME)										LOCA (ERD Conditions)*2										LOCA Flooding										LOCA & LOFC										SPT LOPF										Reaction										Wind Load										Tsunami Load																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
				Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
				Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
				Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
				Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
				Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
				Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
				Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
				Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
				Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
				Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
				Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
				Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
				Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
				Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal Operation										Normal									

[illegible]

Note

*1:	GDCS Pool Water Depth is 4.48 m
*2:	GDCS Pool Water Depth is 0.792 mm.

Dynamic loads, i.e. seismic loads and hydrodynamic loads, are combined according to the SRSS method, as specified in Section 6.3.2 of Reference 2.1.2-m.

Opposite signs of stresses due to the hydrodynamic load or combination of hydrodynamic and seismic load to the other loads is considered. In that case, 500 is added to the original LOAD ID.

For acceptance criteria, U = Allowable Stress as in ASME Section III, Div. 2, Subsection CC-3420 for Factored Load Combination.

For unit load cases which are shaded in the table, the results of the stress analysis are based on the RB/FB global FE model which is used in Appendix E of the "ESBWR Reactor Building Structural Design Report", Reference 2.1.2-e.

Table 6.3.2-2 Detail Load Combinations for Steel Structures

		Dead Load	Live Load		Pressure Load										Thermal Load										LOCA & LOECF		SPE LOECF		Pipe Reac.		Hydrodynamic Load										Wind Load		Tornado Load		Acceptance Criteria																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
			Normal Operation	Soil Pressure (Static)	LOCA				Pressure Load		Normal Operation	LOCA (GDCS Condition1 ⁽¹⁾)				LOCA (GDCS Condition2 ⁽²⁾)				LOCA & LOECF	SPE LOECF (after 72hr.)	LOCA					Reaction					N to S	S to N	E to W	W to E	N to S	S to N	E to W	W to E																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
					PL1	PL2	PL3	PL4	AP	PLM5		H07H	Summer	Winter	TLW0	TLW1	TLW2	TLW3	TLW4			TLW5	TLW6	TLW7	TLW8	TLW9	TLW10	TLW11			TLW12									TLW13	TLW14	TLW15	TLW16	TLW17		TLW18	TLW19	TLW20	TLW21	TLW22	TLW23	TLW24	TLW25	TLW26	TLW27	TLW28	TLW29	TLW30	TLW31	TLW32	TLW33	TLW34	TLW35	TLW36	TLW37	TLW38	TLW39	TLW40	TLW41	TLW42	TLW43	TLW44	TLW45	TLW46	TLW47	TLW48	TLW49	TLW50	TLW51	TLW52	TLW53	TLW54	TLW55	TLW56	TLW57	TLW58	TLW59	TLW60	TLW61	TLW62	TLW63	TLW64	TLW65	TLW66	TLW67	TLW68	TLW69	TLW70	TLW71	TLW72	TLW73	TLW74	TLW75	TLW76	TLW77	TLW78	TLW79	TLW80	TLW81	TLW82	TLW83	TLW84	TLW85	TLW86	TLW87	TLW88	TLW89	TLW90	TLW91	TLW92	TLW93	TLW94	TLW95	TLW96	TLW97	TLW98	TLW99	TLW100	TLW101	TLW102	TLW103	TLW104	TLW105	TLW106	TLW107	TLW108	TLW109	TLW110	TLW111	TLW112	TLW113	TLW114	TLW115	TLW116	TLW117	TLW118	TLW119	TLW120	TLW121	TLW122	TLW123	TLW124	TLW125	TLW126	TLW127	TLW128	TLW129	TLW130	TLW131	TLW132	TLW133	TLW134	TLW135	TLW136	TLW137	TLW138	TLW139	TLW140	TLW141	TLW142	TLW143	TLW144	TLW145	TLW146	TLW147	TLW148	TLW149	TLW150	TLW151	TLW152	TLW153	TLW154	TLW155	TLW156	TLW157	TLW158	TLW159	TLW160	TLW161	TLW162	TLW163	TLW164	TLW165	TLW166	TLW167	TLW168	TLW169	TLW170	TLW171	TLW172	TLW173	TLW174	TLW175	TLW176	TLW177	TLW178	TLW179	TLW180	TLW181	TLW182	TLW183	TLW184	TLW185	TLW186	TLW187	TLW188	TLW189	TLW190	TLW191	TLW192	TLW193	TLW194	TLW195	TLW196	TLW197	TLW198	TLW199	TLW200	TLW201	TLW202	TLW203	TLW204	TLW205	TLW206	TLW207	TLW208	TLW209	TLW210	TLW211	TLW212	TLW213	TLW214	TLW215	TLW216	TLW217	TLW218	TLW219	TLW220	TLW221	TLW222	TLW223	TLW224	TLW225	TLW226	TLW227	TLW228	TLW229	TLW230	TLW231	TLW232	TLW233	TLW234	TLW235	TLW236	TLW237	TLW238	TLW239	TLW240	TLW241	TLW242	TLW243	TLW244	TLW245	TLW246	TLW247	TLW248	TLW249	TLW250	TLW251	TLW252	TLW253	TLW254	TLW255	TLW256	TLW257	TLW258	TLW259	TLW260	TLW261	TLW262	TLW263	TLW264	TLW265	TLW266	TLW267	TLW268	TLW269	TLW270	TLW271	TLW272	TLW273	TLW274	TLW275	TLW276	TLW277	TLW278	TLW279	TLW280	TLW281	TLW282	TLW283	TLW284	TLW285	TLW286	TLW287	TLW288	TLW289	TLW290	TLW291	TLW292	TLW293	TLW294	TLW295	TLW296	TLW297	TLW298	TLW299	TLW300	TLW301	TLW302	TLW303	TLW304	TLW305	TLW306	TLW307	TLW308	TLW309	TLW310	TLW311	TLW312	TLW313	TLW314	TLW315	TLW316	TLW317	TLW318	TLW319	TLW320	TLW321	TLW322	TLW323	TLW324	TLW325	TLW326	TLW327	TLW328	TLW329	TLW330	TLW331	TLW332	TLW333	TLW334	TLW335	TLW336	TLW337	TLW338	TLW339	TLW340	TLW341	TLW342	TLW343	TLW344	TLW345	TLW346	TLW347	TLW348	TLW349	TLW350	TLW351	TLW352	TLW353	TLW354	TLW355	TLW356	TLW357	TLW358	TLW359	TLW360	TLW361	TLW362	TLW363	TLW364	TLW365	TLW366	TLW367	TLW368	TLW369	TLW370	TLW371	TLW372	TLW373	TLW374	TLW375	TLW376	TLW377	TLW378	TLW379	TLW380	TLW381	TLW382	TLW383	TLW384	TLW385	TLW386	TLW387	TLW388	TLW389	TLW390	TLW391	TLW392	TLW393	TLW394	TLW395	TLW396	TLW397	TLW398	TLW399	TLW400	TLW401	TLW402	TLW403	TLW404	TLW405	TLW406	TLW407	TLW408	TLW409	TLW410	TLW411	TLW412	TLW413	TLW414	TLW415	TLW416	TLW417	TLW418	TLW419	TLW420	TLW421	TLW422	TLW423	TLW424	TLW425	TLW426	TLW427	TLW428	TLW429	TLW430	TLW431	TLW432	TLW433	TLW434	TLW435	TLW436	TLW437	TLW438	TLW439	TLW440	TLW441	TLW442	TLW443	TLW444	TLW445	TLW446	TLW447	TLW448	TLW449	TLW450	TLW451	TLW452	TLW453	TLW454	TLW455	TLW456	TLW457	TLW458	TLW459	TLW460	TLW461	TLW462	TLW463	TLW464	TLW465	TLW466	TLW467	TLW468	TLW469	TLW470	TLW471	TLW472	TLW473	TLW474	TLW475	TLW476	TLW477	TLW478	TLW479	TLW480	TLW481	TLW482	TLW483	TLW484	TLW485	TLW486	TLW487	TLW488	TLW489	TLW490	TLW491	TLW492	TLW493	TLW494	TLW495	TLW496	TLW497	TLW498	TLW499	TLW500	TLW501	TLW502	TLW503	TLW504	TLW505	TLW506	TLW507	TLW508	TLW509	TLW510	TLW511	TLW512	TLW513	TLW514	TLW515	TLW516	TLW517	TLW518	TLW519	TLW520	TLW521	TLW522	TLW523	TLW524	TLW525	TLW526	TLW527	TLW528	TLW529	TLW530	TLW531	TLW532	TLW533	TLW534	TLW535	TLW536	TLW537	TLW538	TLW539	TLW540	TLW541	TLW542	TLW543	TLW544	TLW545	TLW546	TLW547	TLW548	TLW549	TLW550	TLW551	TLW552	TLW553	TLW554	TLW555	TLW556	TLW557	TLW558	TLW559	TLW560	TLW561	TLW562	TLW563	TLW564	TLW565	TLW566	TLW567	TLW568	TLW569	TLW570	TLW571	TLW572	TLW573	TLW574	TLW575	TLW576	TLW577	TLW578	TLW579	TLW580	TLW581	TLW582	TLW583	TLW584	TLW585	TLW586	TLW587	TLW588	TLW589	TLW590	TLW591	TLW592	TLW593	TLW594	TLW595	TLW596	TLW597	TLW598	TLW599	TLW600	TLW601	TLW602	TLW603	TLW604	TLW605	TLW606	TLW607	TLW608	TLW609	TLW610	TLW611	TLW612	TLW613	TLW614	TLW615	TLW616	TLW617	TLW618	TLW619	TLW620	TLW621	TLW622	TLW623	TLW624	TLW625	TLW626	TLW627	TLW628	TLW629	TLW630	TLW631	TLW632	TLW633	TLW634	TLW635	TLW636	TLW637	TLW638	TLW639	TLW640	TLW641	TLW642	TLW643	TLW644	TLW645	TLW646	TLW647	TLW648	TLW649	TLW650	TLW651	TLW652	TLW653	TLW654	TLW655	TLW656	TLW657	TLW658	TLW659	TLW660	TLW661	TLW662	TLW663	TLW664	TLW665	TLW666	TLW667	TLW668	TLW669	TLW670	TLW671	TLW672	TLW673	TLW674	TLW675	TLW676	TLW677	TLW678	TLW679	TLW680	TLW681	TLW682	TLW683	TLW684	TLW685	TLW686	TLW687	TLW688	TLW689	TLW690	TLW691	TLW692	TLW693	TLW694	TLW695	TLW696	TLW697	TLW698	TLW699	TLW700	TLW701	TLW702	TLW703	TLW704	TLW705	TLW706	TLW707	TLW708	TLW709	TLW710	TLW711	TLW712	TLW713	TLW714	TLW715	TLW716	TLW717	TLW718	TLW719	TLW720	TLW721	TLW722	TLW723	TLW724	TLW725	TLW726	TLW727	TLW728	TLW729	TLW730	TLW731	TLW732	TLW733	TLW734	TLW735	TLW736	TLW737	TLW738	TLW739	TLW740	TLW741	TLW742	TLW743	TLW744	TLW745	TLW746	TLW747	TLW748	TLW749	TLW750	TLW751	TLW752	TLW753	TLW754	TLW755	TLW756	TLW757	TLW758	TLW759	TLW760	TLW761	TLW762	TLW763	TLW764	TLW765	TLW766	TLW767	TLW768	TLW769	TLW770	TLW771	TLW772	TLW773	TLW774	TLW775	TLW776	TLW777	TLW778	TLW779	TLW780	TLW781	TLW782	TLW783	TLW784	TLW785	TLW786	TLW787	TLW788	TLW789	TLW790	TLW791	TLW792	TLW793	TLW794	TLW795	TLW796	TLW797	TLW798	TLW799	TLW800	TLW801	TLW802	TLW803	TLW804	TLW805	TLW806	TLW807	TLW808	TLW809	TLW810	TLW811	TLW812	TLW813	TLW814	TLW815	TLW816	TLW817	TLW818	TLW819	TLW820	TLW821	TLW822	TLW823	TLW824	TLW825	TLW826	TLW827	TLW828	TLW829	TLW830	TLW831	TLW832	TLW833	TLW834	TLW835	TLW836	TLW837	TLW838	TLW839	TLW840	TLW841	TLW842	TLW843	TLW844	TLW845	TLW846	TLW847	TLW848	TLW849	TLW850	TLW851	TLW852	TLW853	TLW854	TLW855	TLW856	TLW857	TLW858	TLW859	TLW860	TLW861	TLW862	TLW863	TLW864	TLW865	TLW866	TLW867	TLW868	TLW869	TLW870	TLW871	TLW872	TLW873	TLW874	TLW875	TLW876	TLW877	TLW878	TLW879	TLW880	TLW881	TLW882	TLW883	TLW884	TLW885	TLW886	TLW887	TLW888	TLW889	TLW890	TLW891	TLW892	TLW893	TLW894	TLW895	TLW896	TLW897	TLW898	TLW899	TLW900	TLW901	TLW902	TLW903	TLW904	TLW905	TLW906	TLW907	TLW908	TLW909	TLW910	TLW911	TLW912	TLW913	TLW914	TLW915	TLW916	TLW917	TLW918	TLW919	TLW920	TLW921	TLW922	TLW9

Note	Dynamic loads, i.e. seismic loads and hydrodynamic loads, are combined according to the SRSS method, as specified in Section 6.3.2 of Reference 2.1.2-m. Opposite signs of stresses due to the hydrodynamic load or combination of hydrodynamic and seismic load to the other loads is considered. In that case, 500 is added to the original LOAD ID. The acceptance criteria are specified in Part 1 of Reference 2.2-c. For unit load cases which are shaded in the table, the results of the stress analysis are based on the RB/FB global FE model which is used in Appendix E of the "ESBWR Reactor Building Structural Design Report". Reference 2.1.2-e.
------	---

Table 6.3.2-2 Detail Load Combinations for Steel Structures (Continued)

[illegible]

Note Dynamic loads, i.e. seismic loads and hydrodynamic loads are combined according to the SRSS method, as specified in Section 6.3.2 of Reference 2.1.2-m. Opposite signs of stresses due to the hydrodynamic load or combination of hydrodynamic and seismic load to the other loads is considered. In that case, 500 is added to the original LOAD ID. The acceptance criteria are specified in Part 1 of ANSI/AISC N-690-1994-s2 (2004). For unit load cases which are shaded in the table, the results of stress analysis are based on the RB/FB global FE model which is used in Appendix E of "ESBWR Reactor Building Structural Design Report", Reference 2.1.2-e.

Table 6.3.2-2 Detail Load Combinations for Steel Structures (Continued)

		Live Load										Pressure Load										Thermal Load										LOCA & LOFCF										SPF LOFCF										Pipe		Hydrodynamic Load										Wind Load				Tornado Load				Acceptance Criteria																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
		Dead Load										LOCA										Normal Operation										LOCA (GDCS Condition1 ¹)										LOCA (GDCS Condition2 ²)										LOCA & LOFCF										SPF LOFCF												Reas:		LOCA										Reaction				Wind Load				Tornado Load																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
		DELO3	LLLO	SPLO	PL1	PL2	PL3	PL4	AP	PLAMS	HOH	TL50	TL51	TL52	TL53	TL54	TL55	TL56	TL57	TL58	TL59	TL60	TL61	TL62	TL63	TL64	TL65	TL66	TL67	TL68	TL69	TL70	TL71	TL72	TL73	TL74	TL75	TL76	TL77	TL78	TL79	TL80	TL81	TL82	TL83	TL84	TL85	TL86	TL87	TL88	TL89	TL90	TL91	TL92	TL93	TL94	TL95	TL96	TL97	TL98	TL99	TL100	TL101	TL102	TL103	TL104	TL105	TL106	TL107	TL108	TL109			TL110	TL111	TL112	TL113	TL114	TL115	TL116	TL117	TL118	TL119	TL120	TL121	TL122	TL123	TL124	TL125	TL126	TL127	TL128	TL129	TL130	TL131	TL132	TL133	TL134	TL135	TL136	TL137	TL138	TL139	TL140	TL141	TL142	TL143	TL144	TL145	TL146	TL147	TL148	TL149	TL150	TL151	TL152	TL153	TL154	TL155	TL156	TL157	TL158	TL159	TL160	TL161	TL162	TL163	TL164	TL165	TL166	TL167	TL168	TL169	TL170	TL171	TL172	TL173	TL174	TL175	TL176	TL177	TL178	TL179	TL180	TL181	TL182	TL183	TL184	TL185	TL186	TL187	TL188	TL189	TL190	TL191	TL192	TL193	TL194	TL195	TL196	TL197	TL198	TL199	TL200	TL201	TL202	TL203	TL204	TL205	TL206	TL207	TL208	TL209	TL210	TL211	TL212	TL213	TL214	TL215	TL216	TL217	TL218	TL219	TL220	TL221	TL222	TL223	TL224	TL225	TL226	TL227	TL228	TL229	TL230	TL231	TL232	TL233	TL234	TL235	TL236	TL237	TL238	TL239	TL240	TL241	TL242	TL243	TL244	TL245	TL246	TL247	TL248	TL249	TL250	TL251	TL252	TL253	TL254	TL255	TL256	TL257	TL258	TL259	TL260	TL261	TL262	TL263	TL264	TL265	TL266	TL267	TL268	TL269	TL270	TL271	TL272	TL273	TL274	TL275	TL276	TL277	TL278	TL279	TL280	TL281	TL282	TL283	TL284	TL285	TL286	TL287	TL288	TL289	TL290	TL291	TL292	TL293	TL294	TL295	TL296	TL297	TL298	TL299	TL300	TL301	TL302	TL303	TL304	TL305	TL306	TL307	TL308	TL309	TL310	TL311	TL312	TL313	TL314	TL315	TL316	TL317	TL318	TL319	TL320	TL321	TL322	TL323	TL324	TL325	TL326	TL327	TL328	TL329	TL330	TL331	TL332	TL333	TL334	TL335	TL336	TL337	TL338	TL339	TL340	TL341	TL342	TL343	TL344	TL345	TL346	TL347	TL348	TL349	TL350	TL351	TL352	TL353	TL354	TL355	TL356	TL357	TL358	TL359	TL360	TL361	TL362	TL363	TL364	TL365	TL366	TL367	TL368	TL369	TL370	TL371	TL372	TL373	TL374	TL375	TL376	TL377	TL378	TL379	TL380	TL381	TL382	TL383	TL384	TL385	TL386	TL387	TL388	TL389	TL390	TL391	TL392	TL393	TL394	TL395	TL396	TL397	TL398	TL399	TL400	TL401	TL402	TL403	TL404	TL405	TL406	TL407	TL408	TL409	TL410	TL411	TL412	TL413	TL414	TL415	TL416	TL417	TL418	TL419	TL420	TL421	TL422	TL423	TL424	TL425	TL426	TL427	TL428	TL429	TL430	TL431	TL432	TL433	TL434	TL435	TL436	TL437	TL438	TL439	TL440	TL441	TL442	TL443	TL444	TL445	TL446	TL447	TL448	TL449	TL450	TL451	TL452	TL453	TL454	TL455	TL456	TL457	TL458	TL459	TL460	TL461	TL462	TL463	TL464	TL465	TL466	TL467	TL468	TL469	TL470	TL471	TL472	TL473	TL474	TL475	TL476	TL477	TL478	TL479	TL480	TL481	TL482	TL483	TL484	TL485	TL486	TL487	TL488	TL489	TL490	TL491	TL492	TL493	TL494	TL495	TL496	TL497	TL498	TL499	TL500	TL501	TL502	TL503	TL504	TL505	TL506	TL507	TL508	TL509	TL510	TL511	TL512	TL513	TL514	TL515	TL516	TL517	TL518	TL519	TL520	TL521	TL522	TL523	TL524	TL525	TL526	TL527	TL528	TL529	TL530	TL531	TL532	TL533	TL534	TL535	TL536	TL537	TL538	TL539	TL540	TL541	TL542	TL543	TL544	TL545	TL546	TL547	TL548	TL549	TL550	TL551	TL552	TL553	TL554	TL555	TL556	TL557	TL558	TL559	TL560	TL561	TL562	TL563	TL564	TL565	TL566	TL567	TL568	TL569	TL570	TL571	TL572	TL573	TL574	TL575	TL576	TL577	TL578	TL579	TL580	TL581	TL582	TL583	TL584	TL585	TL586	TL587	TL588	TL589	TL590	TL591	TL592	TL593	TL594	TL595	TL596	TL597	TL598	TL599	TL600	TL601	TL602	TL603	TL604	TL605	TL606	TL607	TL608	TL609	TL610	TL611	TL612	TL613	TL614	TL615	TL616	TL617	TL618	TL619	TL620	TL621	TL622	TL623	TL624	TL625	TL626	TL627	TL628	TL629	TL630	TL631	TL632	TL633	TL634	TL635	TL636	TL637	TL638	TL639	TL640	TL641	TL642	TL643	TL644	TL645	TL646	TL647	TL648	TL649	TL650	TL651	TL652	TL653	TL654	TL655	TL656	TL657	TL658	TL659	TL660	TL661	TL662	TL663	TL664	TL665	TL666	TL667	TL668	TL669	TL670	TL671	TL672	TL673	TL674	TL675	TL676	TL677	TL678	TL679	TL680	TL681	TL682	TL683	TL684	TL685	TL686	TL687	TL688	TL689	TL690	TL691	TL692	TL693	TL694	TL695	TL696	TL697	TL698	TL699	TL700	TL701	TL702	TL703	TL704	TL705	TL706	TL707	TL708	TL709	TL710	TL711	TL712	TL713	TL714	TL715	TL716	TL717	TL718	TL719	TL720	TL721	TL722	TL723	TL724	TL725	TL726	TL727	TL728	TL729	TL730	TL731	TL732	TL733	TL734	TL735	TL736	TL737	TL738	TL739	TL740	TL741	TL742	TL743	TL744	TL745	TL746	TL747	TL748	TL749	TL750	TL751	TL752	TL753	TL754	TL755	TL756	TL757	TL758	TL759	TL760	TL761	TL762	TL763	TL764	TL765	TL766	TL767	TL768	TL769	TL770	TL771	TL772	TL773	TL774	TL775	TL776	TL777	TL778	TL779	TL780	TL781	TL782	TL783	TL784	TL785	TL786	TL787	TL788	TL789	TL790	TL791	TL792	TL793	TL794	TL795	TL796	TL797	TL798	TL799	TL800	TL801	TL802	TL803	TL804	TL805	TL806	TL807	TL808	TL809	TL810	TL811	TL812	TL813	TL814	TL815	TL816	TL817	TL818	TL819	TL820	TL821	TL822	TL823	TL824	TL825	TL826	TL827	TL828	TL829	TL830	TL831	TL832	TL833	TL834	TL835	TL836	TL837	TL838	TL839	TL840	TL841	TL842	TL843	TL844	TL845	TL846	TL847	TL848	TL849	TL850	TL851	TL852	TL853	TL854	TL855	TL856	TL857	TL858	TL859	TL860	TL861	TL862	TL863	TL864	TL865	TL866	TL867	TL868	TL869	TL870	TL871	TL872	TL873	TL874	TL875	TL876	TL877	TL878	TL879	TL880	TL881	TL882	TL883	TL884	TL885	TL886	TL887	TL888	TL889	TL890	TL891	TL892	TL893	TL894	TL895	TL896	TL897	TL898	TL899	TL900	TL901	TL902	TL903	TL904	TL905	TL906	TL907	TL908	TL909	TL910	TL911	TL912	TL913	TL914	TL915	TL916	TL917	TL918	TL919	TL920	TL921	TL922	TL923	TL924	TL925	TL926	TL927	TL928	TL929	TL930	TL931	TL932	TL933	TL934	TL935	TL936	TL937	TL938	TL939	TL940	TL941	TL942	TL943	TL944	TL945	TL946	TL947	TL948	TL949	TL950	TL951	TL952	TL953	TL954	TL955	TL956	TL957	TL958	TL959	TL960	TL961	TL962	TL963	TL964	TL965	TL966	TL967	TL968	TL969	TL970	TL971	TL972	TL973	TL974	TL975	TL976	TL977	TL978	TL979	TL980	TL981	TL982	TL983	TL984	TL985	TL986	TL987	TL988	TL989	TL990	TL991	TL992	TL993	TL994	TL995	TL996	TL997	TL998	TL999	TL1000	TL1001	TL1002	TL1003	TL1004	TL1005	TL1006	TL1007	TL1008	TL1009	TL1010	TL1011	TL1012	TL1013	TL1014	TL1015	TL1016	TL1017	TL1018	TL1019	TL1020	TL1021	TL1022	TL1023	TL1024	TL1025	TL1026	TL1027	TL1028	TL1029	TL1030	TL1031	TL1032	TL1033	TL1034	TL1035	TL1036	TL1037	TL1038	TL1039	TL1040	TL1041	TL1042	TL1043	TL1044	TL1045	TL1046	TL1047	TL1048	TL1049	TL1050	TL1051	TL1052	TL1053	TL1054	TL1055	TL1056	TL1057	TL1058	TL1059	TL1060	TL1061	TL1062	TL1063	TL1064	TL1065	TL1066	TL1067	TL1068	TL1069	TL1070	TL1071	TL1072	TL1073	TL1074	TL1075	TL1076	TL1077	TL1078	TL1079	TL1080	TL1081	TL1082	TL1083	TL1084	TL1085	TL1086	TL1087	TL1088	TL1089	TL1090	TL1091	TL1092	TL1093	TL1094	TL1095	TL1096	TL1097	TL1098	TL1099	TL1100	TL1101	TL1102	TL1103	TL1104	TL1105	TL1106	TL1107	TL1108	TL1109	TL1110	TL1111	TL1112	TL1113	TL1114	TL1115	TL1116	TL1117	TL1118	TL1119	TL1120	TL1121	TL1122	TL1123	TL1124	TL1125	TL1126	TL1127	TL1128	TL1129	TL1130	TL1131	TL1132	TL1133	TL1134	TL1135	TL1136	TL1137	TL1138	TL1139	TL1140	TL1141	TL1142	TL1143	TL1144	TL1145	TL1146	TL1147	TL1148	TL1149	TL1150	TL1151	TL1152	TL1153	TL1154	TL1155	TL1156	TL1157	TL1158	TL1159	TL1160	TL1161	TL1162	TL1163	TL1164	TL1165	TL1166	TL1167	TL1168	TL1169	TL1170	TL1171	TL1172	TL1173	TL1174	TL1175	TL1176	TL1177	TL1178	TL1179	TL1180	TL1181	TL1182	TL1183	TL1184	TL1185	TL1186	TL1187	TL1188	TL1189	TL1190	TL1191	TL1192	TL1193	TL1194	TL1195	TL1196	TL1197	TL1198	TL1199	TL1200	TL1201	TL1202	TL1203	TL1204	TL1205	TL1206	TL1207	TL1208	TL1209	TL1210	TL1211	TL1212	TL1213	TL1214	TL1215	TL1216	TL1217	TL1218	TL1219	TL1220	TL1221	TL1222	TL1223	TL1224	TL1225	TL1226	TL1227	TL1228	TL1229	TL1230	TL1231	TL1232	TL1233	TL1234	TL1235	TL1236	TL1237	TL1238	TL1239	TL1240	TL1241	TL1242	TL1243	TL1244	TL1245	TL1246	TL1247	TL1248	TL1249	TL1250	TL1251	TL1252	TL1253	TL1254	TL1255	TL1256	TL1257	TL1258	TL1259	TL1260	TL1261	TL1262	TL1263	TL1264	TL1265	TL1266	TL1267	TL1268	TL1269	TL1270	TL1271	TL1272	TL1273	TL1274	TL1275	TL1276	TL1277	TL1278	TL1279	TL1280	TL1281	TL1282	TL1283	TL1284	TL1285	TL1286	TL1287	TL1288	TL1289	TL1290	TL1291	TL1292	TL1293	TL1294	TL1295	TL1296	TL1297	TL1298	TL1299	TL1300	TL1301	TL1302	TL1303	TL1304	TL1305	TL1306	TL1307	TL1308	TL1309	TL1310	TL1311	TL1312	TL1313	TL1314	TL1315	TL1316	TL1317	TL1318	TL1319	TL1320	TL1321	TL1322	TL1323	TL1324	TL1325	TL1326	TL1327	TL1328	TL1329	TL1330	TL1331	TL1332	TL1333	TL1334	TL1335	TL1336	TL1337	TL1338	TL1339	TL1340	TL1341

Note Dynamic loads, i.e. seismic loads and hydrodynamic loads are combined according to the SRSS method, as specified in Section 6.3.2 of Reference 2.1.2-m. Opposite signs of stresses due to the hydrodynamic load or combination of hydrodynamic and seismic load to the other loads is considered. In that case, 500 is added to the original LOAD ID. The acceptance criteria are specified in Part 1 of ANSI/AISC N-690-1994-s2 (2004). For unit load cases which are shaded in the table, the results of stress analysis are based on the RB/FB global FE model which is used in Appendix E of "ESBWR Reactor Building Structural Design Report", Reference 2.1.2-e.

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 184

REV. 2

of 543

Table 6.3.3-1 Combined Forces and Moments, 1.05D + 1.3L + 1.3To + 1.3W: Winter
– Load ID = 4021 (Selected Load Combination RB-4)

Location	Element ID		N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
18 Wall Below RCCV Bottom	6	OTHR	-1.555	-7.620	-0.224	-0.205	-1.498	-0.004	-0.001	-0.347
		TEMP	1.628	-0.267	-0.739	0.099	1.178	-0.043	0.016	0.044
	13	OTHR	-1.519	-5.859	-0.062	-0.552	-2.918	0.007	-0.004	-0.807
		TEMP	0.500	-3.267	-0.851	0.466	2.640	-0.003	0.023	0.576
	24	OTHR	-1.096	-6.372	-0.195	-0.617	-3.726	0.000	0.001	-1.250
		TEMP	0.791	-3.390	0.142	0.480	2.679	-0.006	-0.001	0.596
19 Wall Below RCCV Mid-Height	806	OTHR	-1.572	-6.384	-0.155	-0.008	-0.036	-0.031	-0.016	-0.096
		TEMP	1.438	-1.233	0.113	0.162	1.001	0.089	-0.059	0.052
	813	OTHR	-2.080	-5.697	0.108	-0.040	0.060	-0.009	-0.005	-0.081
		TEMP	0.801	-3.203	-0.655	0.112	1.009	-0.029	0.009	0.603
	824	OTHR	-2.360	-6.305	-0.077	0.117	0.440	0.012	-0.001	0.098
		TEMP	0.618	-3.509	0.100	0.129	1.019	0.019	0.011	0.540
20 Wall Below RCCV Top	1606	OTHR	-1.035	-5.717	0.046	0.046	0.276	0.030	0.007	-0.193
		TEMP	9.010	-2.016	0.181	-0.500	-2.273	0.101	0.089	1.713
	1613	OTHR	-1.243	-5.474	0.243	0.019	0.266	-0.001	-0.002	-0.194
		TEMP	8.724	-3.628	-0.531	-0.636	-3.693	-0.004	-0.014	2.219
	1624	OTHR	-0.831	-5.849	-0.015	-0.014	-0.180	0.005	-0.008	-0.001
		TEMP	9.355	-4.562	-0.137	-0.712	-3.632	-0.005	-0.066	2.268
21 Exterior Wall @ EL-11.50 ~10.50m	20011	OTHR	-2.257	-3.859	-0.805	0.097	0.687	0.010	0.046	0.224
		TEMP	3.715	3.601	0.919	0.284	1.218	0.038	-0.186	0.357
	20023	OTHR	-1.511	-1.525	-0.594	-0.014	-0.246	0.020	-0.030	-0.138
		TEMP	-1.892	-1.622	2.144	2.538	5.046	0.244	0.376	0.822
	30010	OTHR	-1.682	-2.499	-0.260	-0.334	-1.774	0.015	0.002	1.170
		TEMP	0.175	2.955	-0.157	1.319	4.158	-0.022	-0.030	-0.727
	30020	OTHR	-1.290	-1.608	-0.209	-0.698	-0.860	0.024	-0.254	0.370
		TEMP	-0.154	-1.324	-0.285	0.170	1.409	0.142	-0.039	-0.357
	40001	OTHR	-1.000	-1.845	0.312	-0.424	-1.299	-0.264	0.132	0.770
		TEMP	-0.205	-0.878	-0.095	0.220	1.540	-0.094	0.145	-0.398
	40011	OTHR	-1.645	-3.401	-0.032	-0.398	-2.279	-0.004	0.007	2.059
		TEMP	1.019	3.116	0.054	1.305	4.252	0.008	0.014	-0.766
22 Exterior Wall @ EL4.65 ~6.60m	22011	OTHR	-0.236	-3.251	0.764	-0.005	0.072	0.012	-0.024	0.116
		TEMP	2.586	3.076	-0.119	-0.101	-0.086	0.038	0.020	0.147
	22023	OTHR	-0.106	-1.773	0.013	0.005	0.018	-0.065	0.073	0.020
		TEMP	2.357	-5.300	-2.630	-0.374	0.466	-0.053	0.922	0.549
	32010	OTHR	-0.379	-2.094	-0.001	-0.025	-0.083	0.000	0.001	-0.011
		TEMP	16.055	7.706	0.016	-3.506	-3.286	-0.003	-0.003	-0.226
	32020	OTHR	-0.049	-1.922	0.010	-0.099	-0.076	-0.017	-0.040	0.019
		TEMP	0.404	5.236	2.974	-0.744	-2.379	-0.509	0.936	0.144
	42001	OTHR	-0.038	-2.008	-0.024	-0.086	-0.111	0.058	0.033	0.054
		TEMP	2.925	3.711	3.106	-0.956	-2.146	-0.063	-0.860	-0.349
	42011	OTHR	-0.559	-2.726	-0.052	-0.035	-0.165	0.003	0.006	0.021
		TEMP	13.976	5.189	0.082	-3.633	-3.196	0.101	0.088	-0.115
23 Exterior Wall @ EL22.50 ~24.60m	24211	OTHR	-0.194	-1.961	0.107	-0.076	-0.511	0.006	-0.002	-0.059
		TEMP	3.696	2.547	-0.486	-0.016	0.049	0.013	-0.150	2.136
	24224	OTHR	-0.027	-1.174	0.344	0.059	-0.042	-0.043	-0.084	-0.025
		TEMP	0.155	4.828	-4.303	0.833	-0.313	-0.715	-0.808	-0.293
	34210	OTHR	-0.021	-0.895	0.012	-0.008	-0.094	0.000	0.005	-0.008
		TEMP	17.402	5.781	-0.557	-3.633	-3.490	0.035	-0.012	-0.199
	34220	OTHR	0.032	-0.921	-0.179	0.038	-0.038	-0.002	0.044	0.003
		TEMP	2.056	4.894	2.979	0.866	-2.104	-0.558	1.943	0.152
	44201	OTHR	0.032	-1.089	-0.329	0.043	-0.016	0.013	-0.037	-0.002
		TEMP	1.125	5.799	-0.132	0.393	-2.344	0.550	-2.362	0.138

OTHR: Loads other than thermal loads

TEMP: Thermal loads

Note : Load combination includes the results of NASTRAN based on the RB/FB global FE model which is used in Appendix E of ESBWR Reactor Building Structural Design Report, Reference 2.1.2-e, as shown in Table 6.3.2-1.



Table 6.3.3-1 Combined Forces and Moments, 1.05D + 1.3L + 1.3To + 1.3W: Winter
– Load ID = 4021 (Selected Load Combination RB-4) (Continued)

Location	ElementID		N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
24 Basemat @ Wall Below RCCV	90140	OTHR	-4.095	-3.414	-0.095	-2.222	-1.166	2.690	-2.138	1.910
		TEMP	1.347	1.833	1.711	1.409	0.026	-1.327	-0.666	-0.175
	90182	OTHR	-3.752	-3.255	-0.030	0.473	-2.581	-0.113	0.016	0.552
		TEMP	1.856	0.556	0.778	-0.094	-4.006	0.225	-0.199	3.084
	90111	OTHR	-5.052	-3.312	0.003	-3.377	0.353	-0.368	0.113	0.137
		TEMP	0.687	3.065	-0.002	-4.393	-0.535	0.044	3.217	0.151
25 Slab EL4.65m @ RCCV	93140	OTHR	-0.520	-0.085	0.156	0.052	0.082	-0.059	0.132	-0.109
		TEMP	-0.966	2.070	3.424	-0.522	-0.407	0.286	-0.137	0.110
	93182	OTHR	-0.133	-0.246	0.040	0.006	-0.004	0.002	-0.003	-0.048
		TEMP	3.050	-3.501	-1.013	-0.380	-1.928	-0.084	0.079	1.425
	93111	OTHR	-0.316	0.069	0.027	-0.071	-0.008	-0.004	0.014	-0.005
		TEMP	-3.104	3.895	-0.106	-1.892	-0.348	-0.048	1.246	0.002
26 Slab EL17.5m @ RCCV	96144	OTHR	-0.078	0.206	0.205	0.053	0.072	-0.058	0.128	-0.102
		TEMP	0.051	3.471	3.892	-0.198	-0.171	0.135	-0.037	0.056
	96186	OTHR	0.258	-0.067	0.010	-0.010	-0.045	-0.005	-0.002	-0.008
		TEMP	3.507	-2.461	-1.416	-0.131	-0.625	-0.042	0.023	0.503
	96113	OTHR	-0.064	0.635	-0.010	-0.272	-0.009	-0.014	0.299	0.036
		TEMP	-5.649	-4.999	-0.952	-4.725	-3.463	-0.182	0.956	-0.039
27 Slab EL27.0m @ RCCV	98472	OTHR	0.464	0.091	0.124	0.299	0.497	-0.438	0.356	-0.413
		TEMP	-0.639	-1.108	5.881	-0.552	-0.184	-0.203	0.423	-0.561
	98514	OTHR	0.177	0.148	0.064	0.038	0.161	0.037	-0.021	-0.121
		TEMP	-0.797	-3.095	-1.347	-0.660	-0.340	-0.068	0.061	-0.222
	98424	OTHR	-0.093	0.490	-0.018	1.885	0.435	0.004	-1.193	-0.093
		TEMP	-11.294	-12.507	-1.614	0.502	-0.662	0.174	-6.706	-0.088
28 Pool Girder @ Storage Pool	123054	OTHR	0.377	-2.454	-0.818	0.047	0.043	0.046	-0.012	-0.023
		TEMP	0.751	-3.964	1.802	2.885	2.797	0.041	-0.399	0.710
	123154	OTHR	1.194	-0.523	-0.642	0.066	0.029	0.090	0.007	0.013
		TEMP	1.146	0.864	-0.343	2.404	1.445	-0.430	-0.139	0.303
29 Pool Girder @ Cavity	123062	OTHR	0.383	0.570	0.295	-0.046	-0.224	0.023	0.020	-0.116
		TEMP	-3.702	-0.209	-0.675	0.125	0.180	0.046	-0.120	0.099
	123162	OTHR	-1.514	0.197	0.148	-0.075	-0.052	0.013	0.086	0.028
		TEMP	-3.313	-0.169	-0.673	0.094	-0.259	0.073	-0.235	0.126
30 Pool Girder @ Fuel Pool	123067	OTHR	0.419	-2.151	1.550	0.019	-0.044	-0.067	-0.103	-0.051
		TEMP	-3.957	-6.147	-2.164	0.701	0.523	-0.099	-0.149	0.671
	123167	OTHR	0.462	-0.549	1.359	0.037	0.024	0.015	-0.027	0.009
		TEMP	-3.687	-3.040	-2.757	0.227	-0.680	-0.298	0.028	0.199
31 MS Tunnel Wall and Slab	150122	OTHR	-0.024	0.022	0.303	0.026	0.061	0.018	-0.011	-0.041
		TEMP	0.347	-0.696	2.372	1.402	4.093	-0.043	-0.760	0.539
	96611	OTHR	-0.010	0.302	-0.014	0.078	-0.047	-0.051	-0.081	0.016
		TEMP	-0.316	3.589	-0.223	-1.462	-8.773	-0.478	0.477	0.241
	98614	OTHR	-0.024	-0.150	-0.021	0.012	-0.568	-0.070	-0.057	0.033
		TEMP	-0.229	2.949	-0.177	-0.935	-13.249	0.048	0.556	0.370
32 IC/PCCS Pool Wall in NS Dir.	125051	OTHR	-0.110	-1.373	-0.942	0.003	-0.060	-0.003	0.003	-0.045
		TEMP	-0.586	-0.850	-0.349	-0.001	-0.006	0.000	-0.011	-0.008
	125151	OTHR	-0.131	-0.564	-0.768	-0.001	-0.008	-0.005	0.010	-0.002
		TEMP	-0.609	-0.738	0.611	0.033	0.071	0.015	-0.023	-0.067
	125055	OTHR	0.037	-0.215	-0.098	-0.019	-0.110	0.003	-0.038	-0.073
		TEMP	-1.342	0.274	0.019	0.007	0.033	0.002	0.014	0.013
	125155	OTHR	-0.573	-0.143	-0.083	0.007	0.030	0.006	0.035	-0.040
		TEMP	-1.754	-0.185	-0.039	0.003	0.036	-0.006	-0.076	0.004

OTHR: Loads other than thermal loads

TEMP: Thermal loads

Note : Load combination includes the results of NASTRAN based on the RB/FB global FE model which is used in Appendix E of ESBWR Reactor Building Structural Design Report, Reference 2.1.2-e, as shown in Table 6.3.2-1.



Table 6.3.3-2 Combined Forces and Moments, LOCA After 6 minutes (1.5Pa): Winter
– Load ID = 6241 (Selected Load Combination RB-8a)

Location	Element ID		N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
18 Wall Below RCCV Bottom	6	OTHR	-1.531	-6.036	-0.265	0.034	-0.097	-0.006	0.004	0.084
		TEMP	1.177	-0.473	-0.669	0.101	1.063	-0.040	0.024	0.044
		HYDR	1.039	2.403	0.505	0.296	1.689	0.004	0.014	0.592
	13	OTHR	-1.430	-4.578	-0.001	-0.268	-1.316	0.006	-0.005	-0.330
		TEMP	0.307	-3.027	-0.689	0.408	2.284	-0.002	0.019	0.475
		HYDR	0.829	2.427	0.515	0.223	1.312	0.006	0.011	0.454
	24	OTHR	-1.296	-4.993	-0.152	-0.307	-1.874	-0.002	0.003	-0.643
		TEMP	0.412	-3.041	0.146	0.425	2.350	-0.005	-0.002	0.516
		HYDR	0.902	2.658	0.484	0.159	1.002	0.005	0.010	0.355
19 Wall Below RCCV Mid-Height	806	OTHR	-1.092	-4.839	-0.223	0.011	0.064	-0.020	-0.014	-0.067
		TEMP	1.601	-1.332	0.182	0.235	1.292	0.083	-0.053	-0.063
		HYDR	0.305	2.384	0.674	0.023	0.125	0.031	0.004	0.037
	813	OTHR	-1.485	-4.535	0.144	-0.014	0.141	-0.005	0.004	-0.025
		TEMP	1.036	-2.990	-0.508	0.175	1.290	-0.027	0.006	0.450
		HYDR	0.236	2.472	0.691	0.032	0.124	0.010	0.003	0.108
	824	OTHR	-1.775	-4.863	-0.047	0.110	0.418	0.009	-0.001	0.110
		TEMP	0.890	-3.046	0.126	0.176	1.306	0.019	0.010	0.396
		HYDR	0.259	2.709	0.633	0.018	0.131	0.014	0.002	0.067
20 Wall Below RCCV Top	1606	OTHR	-0.023	-4.224	-0.099	-0.225	-1.309	0.024	0.005	0.305
		TEMP	11.606	-2.042	0.301	-0.668	-3.250	0.099	0.085	2.306
		HYDR	0.777	2.430	0.657	0.469	2.639	0.013	0.006	0.763
	1613	OTHR	-0.217	-4.477	0.242	-0.252	-1.315	-0.003	-0.003	0.330
		TEMP	11.229	-3.474	-0.425	-0.785	-4.386	-0.008	-0.014	2.714
		HYDR	0.778	2.470	0.668	0.471	2.727	0.006	0.008	0.829
	1624	OTHR	0.186	-4.393	-0.005	-0.288	-1.754	0.006	-0.007	0.512
		TEMP	12.187	-3.970	-0.124	-0.867	-4.480	-0.001	-0.082	2.817
		HYDR	0.851	2.674	0.650	0.462	2.630	0.005	0.011	0.811
21 Exterior Wall @ EL-11.50 ~10.50m	20011	OTHR	-1.793	-3.331	-0.710	0.177	0.937	0.018	0.035	0.302
		TEMP	3.023	3.384	0.790	0.274	1.136	0.041	-0.173	0.330
		HYDR	0.191	0.270	0.760	0.386	1.573	0.014	0.039	0.580
	20023	OTHR	-1.159	-1.480	-0.600	-0.018	-0.238	0.012	-0.055	-0.136
		TEMP	-1.459	-1.215	1.590	1.936	3.930	0.184	0.310	0.647
		HYDR	0.020	0.657	0.152	0.101	0.146	0.015	0.119	0.091
	30010	OTHR	-1.167	-2.337	-0.175	-0.186	-1.046	0.008	0.001	0.845
		TEMP	0.421	2.641	-0.135	1.081	3.585	-0.018	-0.024	-0.601
		HYDR	0.586	0.260	0.326	0.183	0.969	0.003	0.007	0.246
	30020	OTHR	-0.954	-1.671	-0.234	-0.552	-0.778	0.022	-0.148	0.330
		TEMP	-0.090	-1.196	-0.238	0.081	1.104	0.123	-0.022	-0.270
		HYDR	0.044	0.862	0.222	0.037	0.180	0.008	0.062	0.056
	40001	OTHR	-0.755	-1.833	0.384	-0.336	-1.076	-0.200	0.069	0.626
		TEMP	-0.154	-0.831	0.014	0.123	1.237	-0.081	0.114	-0.310
		HYDR	0.044	0.888	0.191	0.062	0.164	0.008	0.065	0.045
	40011	OTHR	-1.377	-3.029	-0.028	-0.224	-1.384	0.000	0.005	1.515
		TEMP	0.865	2.785	0.044	1.075	3.674	0.007	0.012	-0.638
		HYDR	0.433	0.497	0.386	0.121	0.626	0.007	0.011	0.150

OTHR: Loads other than thermal and hydrodynamic loads

TEMP: Thermal loads

HYDR: Hydrodynamic loads

Note : Load combination includes the results of NASTRAN based on the RB/FB global FE model which is used in Appendix E of ESBWR Reactor Building Structural Design Report, Reference 2.1.2-e, as shown in Table 6.3.2-1.



Table 6.3.3-2 Combined Forces and Moments, LOCA After 6 minutes (1.5Pa): Winter
– Load ID = 6241 (Selected Load Combination RB-8a) (Continued)

Location	Element ID		N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
22 Exterior Wall @ EL4.65 ~6.60m	22011	OTHR	0.233	-2.732	0.623	-0.004	0.111	0.013	-0.025	0.153
		TEMP	3.577	2.789	-0.075	-0.128	-0.161	0.049	0.032	-0.031
		HYDR	0.300	1.068	0.853	0.018	0.123	0.027	0.004	0.227
	22023	OTHR	-0.054	-1.629	-0.050	0.085	0.042	-0.074	0.042	0.009
		TEMP	1.984	-3.558	-1.991	0.092	0.423	-0.047	0.570	0.405
		HYDR	0.070	0.603	0.422	0.133	0.046	0.037	0.042	0.015
	32010	OTHR	0.199	-1.913	0.031	-0.019	0.017	0.007	0.000	-0.098
		TEMP	14.408	6.124	0.009	-2.798	-2.759	0.004	-0.008	0.040
		HYDR	0.358	0.431	0.446	0.022	0.052	0.005	0.001	0.137
	32020	OTHR	0.002	-1.891	0.248	0.000	-0.029	-0.053	0.009	0.028
		TEMP	0.445	4.720	2.524	-0.285	-1.833	-0.377	0.922	0.167
		HYDR	0.038	0.558	0.293	0.087	0.009	0.016	0.066	0.007
	42001	OTHR	-0.001	-1.929	0.128	0.025	-0.061	0.059	-0.008	0.049
		TEMP	2.451	3.607	2.534	-0.371	-1.611	-0.058	-0.794	-0.254
		HYDR	0.066	0.583	0.326	0.112	0.010	0.011	0.045	0.003
	42011	OTHR	-0.116	-2.159	-0.033	-0.040	-0.091	-0.005	0.004	-0.065
		TEMP	12.432	4.405	0.143	-2.975	-2.774	0.081	0.081	0.172
		HYDR	0.217	0.756	0.529	0.042	0.042	0.012	0.006	0.127
23 Exterior Wall @ EL22.50 ~24.60m	24211	OTHR	0.317	-1.469	0.076	0.003	-0.055	0.014	0.005	-0.279
		TEMP	4.177	2.901	-0.313	0.092	0.628	0.014	-0.122	1.431
		HYDR	0.203	0.688	0.418	0.044	0.187	0.021	0.003	0.217
	24224	OTHR	-0.020	-1.497	0.118	0.023	-0.001	-0.012	-0.029	-0.015
		TEMP	0.340	4.642	-3.562	0.871	-0.344	-0.446	-0.824	-0.417
		HYDR	0.034	0.693	0.342	0.139	0.094	0.035	0.068	0.098
	34210	OTHR	0.546	-0.794	0.075	0.009	0.154	0.000	0.002	0.057
		TEMP	15.323	4.794	-0.317	-2.778	-2.409	0.015	-0.011	0.104
		HYDR	0.297	0.145	0.251	0.021	0.109	0.013	0.002	0.057
	34220	OTHR	0.067	-1.342	0.038	0.047	0.025	0.003	0.031	-0.003
		TEMP	1.721	4.437	2.297	0.980	-1.464	-0.240	1.609	0.013
		HYDR	0.041	0.329	0.143	0.053	0.021	0.025	0.034	0.010
	44201	OTHR	0.025	-1.389	-0.008	0.054	0.026	0.000	-0.031	-0.008
		TEMP	1.001	5.209	0.300	0.668	-1.698	0.337	-1.911	0.044
		HYDR	0.037	0.398	0.239	0.049	0.008	0.005	0.035	0.006
24 Basemat @ Wall Below RCCV	90140	OTHR	-3.158	-2.605	0.271	-0.751	-0.162	1.124	-1.864	1.611
		TEMP	1.052	1.448	1.374	0.756	-0.217	-0.971	-0.682	-0.069
		HYDR	0.719	0.518	0.569	1.410	0.998	0.310	1.000	1.030
	90182	OTHR	-2.231	-2.517	-0.056	0.089	-0.479	0.032	0.038	0.397
		TEMP	1.619	0.481	0.610	-0.246	-3.861	0.184	-0.141	2.769
		HYDR	1.338	0.255	0.263	0.800	0.527	0.217	0.279	1.123
	90111	OTHR	-3.896	-2.337	-0.038	-1.104	0.070	-0.145	0.097	0.111
		TEMP	0.567	2.209	-0.001	-4.129	-0.522	0.050	2.860	0.127
		HYDR	0.202	1.158	0.073	0.385	0.640	0.171	1.039	0.271
25 Slab EL4.65m @ RCCV	93140	OTHR	-0.327	0.109	0.281	0.113	0.123	-0.102	0.131	-0.111
		TEMP	-0.669	2.312	4.286	-0.515	-0.395	0.287	-0.135	0.111
		HYDR	0.264	0.274	0.326	0.053	0.039	0.052	0.015	0.018
	93182	OTHR	0.222	-0.127	0.018	0.008	0.093	0.007	-0.004	-0.047
		TEMP	4.229	-4.036	-1.098	-0.354	-1.829	-0.083	0.075	1.370
		HYDR	0.401	0.097	0.114	0.036	0.061	0.006	0.007	0.153
	93111	OTHR	-0.166	0.331	-0.030	0.044	-0.003	-0.001	-0.008	-0.006
		TEMP	-3.602	4.956	-0.257	-1.768	-0.316	-0.047	1.178	0.000
		HYDR	0.096	0.435	0.096	0.019	0.029	0.003	0.093	0.003

OTHR: Loads other than thermal and hydrodynamic loads

TEMP: Thermal loads

HYDR: Hydrodynamic loads

Note : Load combination includes the results of NASTRAN based on the RB/FB global FE model which is used in Appendix E of ESBWR Reactor Building Structural Design Report, Reference 2.1.2-e, as shown in Table 6.3.2-1.



Table 6.3.3-2 Combined Forces and Moments, LOCA After 6 minutes (1.5Pa): Winter
– Load ID = 6241 (Selected Load Combination RB-8a) (Continued)

Location	Element ID		N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
26 Slab EL17.5m @ RCCV	96144	OTHR	0.038	0.622	0.776	0.149	0.151	-0.117	0.140	-0.122
		TEMP	-0.269	4.712	6.965	-0.230	-0.125	0.167	-0.073	0.023
		HYDR	0.081	0.029	0.338	0.099	0.082	0.050	0.019	0.021
	96186	OTHR	0.995	-0.423	-0.105	0.012	0.106	0.001	-0.005	-0.121
		TEMP	6.688	-4.125	-1.418	-0.091	-0.316	-0.048	0.016	0.347
		HYDR	0.259	0.142	0.173	0.049	0.232	0.009	0.011	0.187
	96113	OTHR	-0.527	1.550	-0.152	0.289	0.072	-0.007	-0.064	0.008
		TEMP	-8.342	2.574	-1.682	-4.481	-2.783	-0.199	1.240	-0.059
		HYDR	0.076	0.484	0.282	0.349	0.083	0.012	0.268	0.029
27 Slab EL27.0m @ RCCV	98472	OTHR	0.594	0.662	-0.127	0.118	0.163	-0.006	0.324	-0.336
		TEMP	-0.778	-0.772	5.392	-0.313	0.031	-0.311	0.451	-0.561
		HYDR	0.140	0.069	0.211	0.086	0.112	0.056	0.069	0.071
	98514	OTHR	0.367	0.519	0.027	-0.024	-0.399	-0.005	-0.007	-0.023
		TEMP	0.397	-2.323	-1.289	-0.515	0.047	-0.042	0.045	-0.511
		HYDR	0.248	0.108	0.237	0.038	0.180	0.002	0.003	0.142
	98424	OTHR	-0.286	1.516	-0.057	0.050	0.173	-0.131	-0.585	-0.044
		TEMP	-9.063	-6.855	-1.452	1.316	-0.418	0.194	-5.559	-0.101
		HYDR	0.068	0.218	0.135	0.326	0.135	0.021	0.220	0.014
28 Pool Girder @ Storage Pool	123054	OTHR	0.221	0.665	1.288	0.068	0.030	-0.130	-0.048	-0.057
		TEMP	1.314	-2.832	1.430	2.281	2.120	0.027	-0.232	0.482
		HYDR	0.169	0.213	0.180	0.014	0.011	0.008	0.016	0.018
	123154	OTHR	0.285	-0.019	1.143	0.075	0.035	-0.140	-0.079	0.026
		TEMP	1.031	0.747	-0.407	1.925	1.145	-0.338	-0.086	0.247
		HYDR	0.305	0.042	0.174	0.020	0.013	0.023	0.009	0.001
29 Pool Girder @ Cavity	123062	OTHR	0.367	-1.036	-1.162	0.017	0.212	0.002	0.039	0.134
		TEMP	-1.254	-0.148	-0.719	0.101	0.323	0.027	0.057	0.172
		HYDR	0.185	0.022	0.140	0.013	0.016	0.006	0.007	0.004
	123162	OTHR	1.938	-0.386	-0.834	0.055	0.003	0.004	-0.033	-0.022
		TEMP	-1.691	-0.032	-0.470	0.128	-0.117	-0.003	-0.151	0.085
		HYDR	0.453	0.019	0.133	0.024	0.015	0.004	0.016	0.004
30 Pool Girder @ Fuel Pool	123067	OTHR	0.231	1.004	-1.279	-0.036	-0.070	0.018	-0.058	-0.033
		TEMP	-2.405	-6.001	-1.842	0.639	0.439	-0.117	-0.150	0.470
		HYDR	0.176	1.073	0.411	0.030	0.029	0.012	0.024	0.030
	123167	OTHR	-0.148	0.212	-1.265	-0.006	-0.058	0.034	-0.084	-0.003
		TEMP	-2.204	-2.669	-2.246	0.268	-0.449	-0.228	-0.011	0.180
		HYDR	0.478	0.311	0.449	0.019	0.008	0.008	0.012	0.005
31 MS Tunnel Wall and Slab	150122	OTHR	0.036	-0.288	0.367	0.020	0.097	0.014	-0.006	-0.067
		TEMP	0.224	-0.515	1.901	1.053	3.140	-0.007	-0.584	0.364
		HYDR	0.018	0.056	0.006	0.008	0.033	0.006	0.002	0.021
	96611	OTHR	-0.050	0.728	-0.045	0.052	-0.095	-0.055	-0.069	0.018
		TEMP	-0.447	4.103	-0.332	-1.287	-7.109	-0.423	0.426	0.209
		HYDR	0.009	0.075	0.012	0.044	0.101	0.018	0.015	0.008
	98614	OTHR	-0.017	-0.296	-0.016	-0.198	-0.998	-0.137	0.009	0.053
		TEMP	-0.187	1.989	-0.145	-0.861	-10.477	-0.011	0.470	0.303
		HYDR	0.006	0.115	0.007	0.005	0.056	0.009	0.001	0.010

OTHR: Loads other than thermal and hydrodynamic loads

TEMP: Thermal loads

HYDR: Hydrodynamic loads

Note : Load combination includes the results of NASTRAN based on the RB/FB global FE model which is used in Appendix E of ESBWR Reactor Building Structural Design Report, Reference 2.1.2-e, as shown in Table 6.3.2-1.



HITACHI

WG3-U71-ERD-S-0004 SH NO. 189

REV. 2

of 543

**Table 6.3.3-2 Combined Forces and Moments, LOCA After 6 minutes (1.5Pa): Winter
– Load ID = 6241 (Selected Load Combination RB-8a) (Continued)**

Location	Element ID		N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
32 IC/PCCS Pool Wall in NS Dir.	125051	OTHR	0.220	0.671	0.802	-0.044	0.018	0.002	-0.034	0.035
		TEMP	-0.257	-0.976	-0.150	-0.013	-0.016	-0.001	-0.024	-0.015
		HYDR	0.017	0.095	0.061	0.003	0.002	0.000	0.003	0.001
	125151	OTHR	0.332	0.204	0.639	-0.056	-0.014	0.001	-0.056	0.003
		TEMP	-0.404	-0.680	0.529	0.018	0.055	0.012	-0.030	-0.051
		HYDR	0.038	0.053	0.068	0.004	0.001	0.000	0.004	0.000
	125055	OTHR	0.235	-0.007	-0.080	0.024	0.098	0.001	0.040	0.070
		TEMP	-0.601	0.281	0.050	0.008	0.023	0.001	0.007	0.002
		HYDR	0.048	0.044	0.093	0.001	0.001	0.000	0.001	0.001
	125155	OTHR	0.733	0.061	-0.062	-0.001	-0.039	-0.004	-0.030	0.038
		TEMP	-1.201	-0.035	0.047	0.008	0.037	-0.005	-0.061	0.002
		HYDR	0.073	0.017	0.100	0.001	0.001	0.000	0.002	0.001

OTHR: Loads other than thermal and hydrodynamic loads

TEMP: Thermal loads

HYDR: Hydrodynamic loads

Note : Load combination includes the results of NASTRAN based on the RB/FB global FE model which is used in Appendix E of ESBWR Reactor Building Structural Design Report, Reference 2.1.2-e, as shown in Table 6.3.2-1.



Table 6.3.3-3 Combined Forces and Moments, LOCA After 72 hours (1.5Pa): Winter
– Load ID = 6441 (Selected Load Combination RB-8b)

Location	Element ID		N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
18 Wall Below RCCV Bottom	6	OTHR	-1.619	-5.773	-0.314	0.087	0.218	-0.007	0.006	0.187
		TEMP	0.745	-0.977	-0.895	0.238	1.920	-0.053	0.044	0.293
		HYDR	0.772	1.667	0.389	0.220	1.254	0.003	0.011	0.440
	13	OTHR	-1.502	-4.358	-0.016	-0.209	-0.983	0.006	-0.005	-0.227
		TEMP	-0.174	-4.065	-0.782	0.604	3.357	-0.002	0.023	0.785
		HYDR	0.611	1.684	0.393	0.167	0.980	0.004	0.008	0.338
	24	OTHR	-1.402	-4.747	-0.143	-0.245	-1.523	-0.002	0.003	-0.534
		TEMP	0.101	-3.765	0.212	0.594	3.314	-0.007	-0.003	0.779
		HYDR	0.664	1.845	0.387	0.123	0.766	0.004	0.007	0.271
19 Wall Below RCCV Mid-Height	806	OTHR	-1.066	-4.571	-0.254	0.015	0.091	-0.017	-0.015	-0.062
		TEMP	1.907	-2.149	0.225	0.307	1.688	0.090	-0.068	-0.082
		HYDR	0.214	1.640	0.518	0.017	0.091	0.024	0.003	0.027
	813	OTHR	-1.449	-4.336	0.134	-0.007	0.170	-0.004	0.007	-0.008
		TEMP	1.360	-3.986	-0.566	0.221	1.702	-0.034	0.006	0.602
		HYDR	0.164	1.703	0.531	0.023	0.089	0.010	0.003	0.080
	824	OTHR	-1.752	-4.606	-0.036	0.117	0.442	0.010	-0.002	0.126
		TEMP	1.151	-3.732	0.198	0.224	1.729	0.027	0.015	0.502
		HYDR	0.175	1.868	0.508	0.012	0.095	0.013	0.001	0.050
20 Wall Below RCCV Top	1606	OTHR	0.206	-3.965	-0.134	-0.297	-1.724	0.024	0.005	0.433
		TEMP	15.858	-3.114	0.381	-0.839	-4.009	0.124	0.101	3.042
		HYDR	0.627	1.658	0.505	0.343	1.917	0.009	0.006	0.564
	1613	OTHR	0.008	-4.314	0.233	-0.326	-1.735	-0.004	-0.003	0.467
		TEMP	15.713	-4.649	-0.420	-1.005	-5.538	-0.011	-0.016	3.612
		HYDR	0.620	1.694	0.502	0.340	1.957	0.004	0.008	0.601
	1624	OTHR	0.437	-4.132	0.002	-0.364	-2.194	0.007	-0.006	0.657
		TEMP	16.688	-4.842	-0.107	-1.115	-5.549	0.001	-0.106	3.698
		HYDR	0.683	1.834	0.505	0.336	1.898	0.003	0.010	0.592
21 Exterior Wall @ EL-11.50 ~10.50m	20011	OTHR	-1.773	-3.231	-0.705	0.202	1.028	0.020	0.031	0.330
		TEMP	3.314	4.817	0.922	0.447	1.837	0.052	-0.225	0.576
		HYDR	0.135	0.207	0.589	0.279	1.135	0.010	0.029	0.418
	20023	OTHR	-1.158	-1.487	-0.611	-0.025	-0.231	0.012	-0.054	-0.133
		TEMP	-1.453	-1.169	1.549	1.890	4.020	0.180	0.322	0.683
		HYDR	0.016	0.467	0.114	0.074	0.109	0.011	0.091	0.068
	30010	OTHR	-1.125	-2.318	-0.177	-0.153	-0.884	0.007	0.001	0.811
		TEMP	0.688	3.733	-0.258	1.289	4.763	-0.022	-0.031	-0.865
		HYDR	0.416	0.191	0.261	0.135	0.710	0.003	0.006	0.180
	30020	OTHR	-0.943	-1.710	-0.239	-0.564	-0.772	0.026	-0.145	0.329
		TEMP	-0.058	-1.477	-0.392	0.021	1.209	0.144	-0.026	-0.282
		HYDR	0.034	0.601	0.161	0.028	0.126	0.006	0.045	0.038
	40001	OTHR	-0.749	-1.866	0.405	-0.348	-1.063	-0.202	0.068	0.623
		TEMP	-0.090	-1.141	0.056	0.039	1.330	-0.097	0.105	-0.322
		HYDR	0.034	0.620	0.140	0.046	0.114	0.006	0.047	0.031
	40011	OTHR	-1.377	-2.988	-0.028	-0.188	-1.203	0.001	0.005	1.476
		TEMP	1.295	3.630	0.051	1.243	4.654	0.011	0.015	-0.844
		HYDR	0.324	0.343	0.301	0.092	0.471	0.005	0.008	0.113

OTHR: Loads other than thermal and hydrodynamic loads

TEMP: Thermal loads

HYDR: Hydrodynamic loads

Note : Load combination includes the results of NASTRAN based on the RB/FB global FE model which is used in Appendix E of ESBWR Reactor Building Structural Design Report, Reference 2.1.2-e, as shown in Table 6.3.2-1.



Table 6.3.3-3 Combined Forces and Moments, LOCA After 72 hours (1.5Pa): Winter
– Load ID = 6441 (Selected Load Combination RB-8b) (Continued)

Location	Element ID		N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
22 Exterior Wall @ EL4.65 ~6.60m	22011	OTHR	0.339	-2.651	0.604	-0.004	0.125	0.014	-0.027	0.174
		TEMP	5.080	4.474	-0.209	-0.175	-0.228	0.067	0.045	0.074
		HYDR	0.227	0.763	0.623	0.012	0.082	0.020	0.003	0.156
	22023	OTHR	-0.043	-1.614	-0.038	0.115	0.050	-0.081	0.033	0.007
		TEMP	2.211	-3.114	-2.141	0.528	0.492	-0.052	0.386	0.393
		HYDR	0.050	0.414	0.306	0.106	0.032	0.026	0.029	0.011
	32010	OTHR	0.331	-1.891	0.025	-0.020	0.035	0.009	0.000	-0.125
		TEMP	16.739	7.724	-0.075	-2.893	-3.003	-0.001	-0.014	0.022
		HYDR	0.268	0.301	0.334	0.019	0.042	0.004	0.001	0.100
	32020	OTHR	0.015	-1.865	0.304	0.024	-0.022	-0.065	0.025	0.031
		TEMP	0.653	4.869	2.518	0.104	-1.860	-0.395	1.226	0.199
		HYDR	0.030	0.375	0.221	0.070	0.007	0.013	0.052	0.005
	42001	OTHR	0.013	-1.892	0.155	0.056	-0.055	0.063	-0.019	0.051
		TEMP	2.720	3.801	2.644	0.130	-1.563	-0.051	-0.998	-0.239
		HYDR	0.050	0.394	0.243	0.090	0.007	0.009	0.036	0.002
	42011	OTHR	-0.007	-2.066	-0.022	-0.044	-0.083	-0.007	0.004	-0.089
		TEMP	14.110	5.515	0.234	-3.164	-3.046	0.073	0.090	0.169
		HYDR	0.174	0.524	0.390	0.035	0.041	0.009	0.005	0.100
23 Exterior Wall @ EL22.50 ~24.60m	24211	OTHR	0.432	-1.384	0.073	0.019	0.042	0.016	0.006	-0.324
		TEMP	6.073	5.669	-0.239	0.176	0.982	0.008	-0.147	1.336
		HYDR	0.139	0.484	0.307	0.030	0.133	0.015	0.003	0.151
	24224	OTHR	-0.016	-1.578	0.073	0.018	0.007	-0.005	-0.020	-0.014
		TEMP	1.011	5.349	-3.664	1.966	0.071	-0.637	-1.563	-0.323
		HYDR	0.024	0.484	0.237	0.097	0.065	0.024	0.049	0.069
	34210	OTHR	0.665	-0.773	0.079	0.011	0.196	-0.001	0.001	0.070
		TEMP	21.813	5.545	-0.581	-2.903	-2.819	0.035	-0.002	-0.128
		HYDR	0.213	0.101	0.181	0.014	0.075	0.009	0.001	0.040
	34220	OTHR	0.072	-1.429	0.075	0.047	0.037	0.006	0.029	-0.005
		TEMP	2.794	5.432	4.414	2.629	-1.178	-0.711	2.571	0.094
		HYDR	0.028	0.230	0.103	0.036	0.015	0.017	0.022	0.007
	44201	OTHR	0.024	-1.451	0.059	0.057	0.035	-0.003	-0.027	-0.009
		TEMP	1.793	6.586	0.562	2.230	-1.491	0.539	-2.967	0.044
		HYDR	0.026	0.278	0.167	0.034	0.005	0.003	0.024	0.004
24 Basemat @ Wall Below RCCV	90140	OTHR	-3.166	-2.562	0.350	-0.504	0.036	0.808	-1.844	1.559
		TEMP	0.838	1.691	1.751	-0.171	-1.046	-1.095	-1.135	0.139
		HYDR	0.511	0.380	0.435	1.016	0.711	0.265	0.709	0.729
	90182	OTHR	-2.067	-2.502	-0.061	-0.009	-0.124	0.075	0.031	0.375
		TEMP	1.908	0.687	0.488	-0.873	-5.527	0.260	-0.110	3.825
		HYDR	0.956	0.181	0.195	0.570	0.440	0.179	0.209	0.795
	90111	OTHR	-3.876	-2.251	-0.048	-0.757	-0.019	-0.097	0.077	0.107
		TEMP	0.733	2.908	-0.011	-5.322	-1.147	0.107	3.687	0.151
		HYDR	0.135	0.851	0.058	0.342	0.458	0.143	0.736	0.209
25 Slab EL4.65m @ RCCV	93140	OTHR	-0.301	0.152	0.320	0.126	0.132	-0.112	0.133	-0.113
		TEMP	-0.383	3.018	5.804	-0.739	-0.564	0.413	-0.192	0.163
		HYDR	0.199	0.202	0.263	0.038	0.028	0.035	0.011	0.013
	93182	OTHR	0.301	-0.109	0.015	0.007	0.109	0.008	-0.004	-0.040
		TEMP	6.161	-5.154	-1.518	-0.481	-2.508	-0.114	0.105	1.903
		HYDR	0.304	0.089	0.090	0.026	0.045	0.004	0.005	0.109
	93111	OTHR	-0.148	0.401	-0.042	0.061	-0.004	-0.001	-0.005	-0.006
		TEMP	-4.494	6.820	-0.448	-2.369	-0.414	-0.066	1.594	0.001
		HYDR	0.094	0.336	0.073	0.014	0.021	0.002	0.067	0.002

OTHR: Loads other than thermal and hydrodynamic loads

TEMP: Thermal loads

HYDR: Hydrodynamic loads

Note : Load combination includes the results of NASTRAN based on the RB/FB global FE model which is used in Appendix E of ESBWR Reactor Building Structural Design Report, Reference 2.1.2-e, as shown in Table 6.3.2-1.



Table 6.3.3-3 Combined Forces and Moments, LOCA After 72 hours (1.5Pa): Winter
– Load ID = 6441 (Selected Load Combination RB-8b) (Continued)

Location	Element ID		N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
26 Slab EL17.5m @ RCCV	96144	OTHR	0.060	0.743	0.907	0.170	0.165	-0.128	0.145	-0.126
		TEMP	0.733	5.839	8.138	-0.232	-0.178	0.174	-0.043	0.066
		HYDR	0.059	0.024	0.247	0.068	0.056	0.034	0.013	0.015
	96186	OTHR	1.173	-0.501	-0.139	0.017	0.135	0.004	-0.006	-0.146
		TEMP	9.999	-4.559	-2.165	-0.150	-0.675	-0.057	0.023	0.638
		HYDR	0.185	0.103	0.126	0.034	0.159	0.006	0.008	0.128
	96113	OTHR	-0.637	1.788	-0.200	0.373	0.087	0.004	-0.131	0.004
		TEMP	-9.165	5.149	-1.811	-4.378	-2.755	-0.237	1.010	-0.100
		HYDR	0.059	0.334	0.201	0.240	0.058	0.009	0.185	0.020
27 Slab EL27.0m @ RCCV	98472	OTHR	0.598	0.749	-0.160	0.093	0.116	0.074	0.310	-0.312
		TEMP	-3.645	-3.148	5.906	-1.729	-1.315	-0.297	0.534	-0.685
		HYDR	0.100	0.049	0.144	0.060	0.079	0.039	0.048	0.050
	98514	OTHR	0.388	0.537	0.023	-0.035	-0.502	-0.013	-0.005	-0.005
		TEMP	-2.902	-2.765	-1.440	-1.895	-1.503	-0.079	0.078	-0.381
		HYDR	0.171	0.075	0.171	0.027	0.126	0.002	0.002	0.099
	98424	OTHR	-0.327	1.735	-0.065	-0.312	0.121	-0.158	-0.473	-0.035
		TEMP	-8.825	-1.775	-2.345	3.485	0.429	0.374	-5.774	-0.156
		HYDR	0.045	0.153	0.099	0.229	0.096	0.015	0.157	0.010
28 Pool Girder @ Storage Pool	123054	OTHR	0.181	1.271	1.721	0.070	0.026	-0.166	-0.053	-0.068
		TEMP	3.583	1.298	2.382	3.613	2.453	-0.343	0.113	0.317
		HYDR	0.115	0.149	0.128	0.009	0.008	0.005	0.012	0.012
	123154	OTHR	0.064	0.064	1.522	0.074	0.040	-0.189	-0.096	0.030
		TEMP	3.638	3.575	-2.911	3.372	1.303	-0.374	-0.255	0.413
		HYDR	0.211	0.029	0.122	0.014	0.009	0.016	0.006	0.001
29 Pool Girder @ Cavity	123062	OTHR	0.341	-1.396	-1.460	0.027	0.300	-0.001	0.043	0.174
		TEMP	0.505	0.115	-1.385	3.836	3.893	0.008	0.034	0.188
		HYDR	0.127	0.014	0.099	0.009	0.011	0.004	0.005	0.003
	123162	OTHR	2.594	-0.537	-1.030	0.081	0.023	0.000	-0.058	-0.029
		TEMP	1.929	0.409	-1.840	3.803	2.820	0.092	-0.288	0.644
		HYDR	0.315	0.013	0.093	0.017	0.011	0.003	0.011	0.003
30 Pool Girder @ Fuel Pool	123067	OTHR	0.174	1.598	-1.845	-0.044	-0.074	0.042	-0.040	-0.043
		TEMP	-2.101	-7.271	-3.005	3.592	3.540	-0.636	0.317	0.815
		HYDR	0.121	0.753	0.285	0.022	0.021	0.008	0.017	0.021
	123167	OTHR	-0.295	0.333	-1.783	-0.009	-0.064	0.036	-0.080	0.002
		TEMP	-0.679	-2.776	-3.132	2.749	1.834	-0.242	-0.176	0.616
		HYDR	0.336	0.218	0.312	0.013	0.006	0.006	0.008	0.003
31 MS Tunnel Wall and Slab	150122	OTHR	0.048	-0.350	0.382	0.019	0.105	0.014	-0.006	-0.073
		TEMP	0.316	-0.711	1.797	0.940	3.101	0.011	-0.551	0.426
		HYDR	0.012	0.039	0.004	0.006	0.024	0.004	0.002	0.014
	96611	OTHR	-0.060	0.825	-0.052	0.047	-0.107	-0.056	-0.067	0.019
		TEMP	-0.557	4.662	-0.414	-1.254	-7.116	-0.406	0.420	0.206
		HYDR	0.007	0.052	0.008	0.031	0.072	0.013	0.011	0.005
	98614	OTHR	-0.016	-0.324	-0.016	-0.240	-1.090	-0.151	0.022	0.057
		TEMP	-0.043	0.725	-0.043	-0.850	-9.922	-0.018	0.459	0.307
		HYDR	0.004	0.081	0.005	0.004	0.040	0.006	0.001	0.007

OTHR: Loads other than thermal and hydrodynamic loads

TEMP: Thermal loads

HYDR: Hydrodynamic loads

Note: Load combination includes the results of NASTRAN based on the RB/FB global FE model which is used in Appendix E of ESBWR Reactor Building Structural Design Report, Reference 2.1.2-e, as shown in Table 6.3.2-1.



**Table 6.3.3-3 Combined Forces and Moments, LOCA After 72 hours (1.5Pa): Winter
– Load ID = 6441 (Selected Load Combination RB-8b) (Continued)**

Location	Element ID		N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
32 IC/PCCS Pool Wall in NS Dir.	125051	OTHR	0.275	1.012	1.148	-0.051	0.034	0.003	-0.041	0.049
		TEMP	-2.425	-2.173	-0.782	0.093	0.096	-0.014	0.023	0.036
		HYDR	0.011	0.065	0.043	0.002	0.001	0.000	0.002	0.001
	125151	OTHR	0.410	0.298	0.920	-0.064	-0.011	0.002	-0.068	0.005
		TEMP	-2.083	-1.572	1.896	0.131	0.140	0.029	0.019	-0.082
		HYDR	0.026	0.037	0.048	0.003	0.001	0.000	0.003	0.000
	125055	OTHR	0.260	-0.040	-0.079	0.032	0.139	0.001	0.054	0.096
		TEMP	-4.971	-0.309	0.162	0.019	0.097	0.004	-0.047	-0.011
		HYDR	0.033	0.031	0.066	0.001	0.001	0.000	0.001	0.000
	125155	OTHR	0.974	0.033	-0.057	-0.002	-0.050	-0.006	-0.046	0.055
		TEMP	-4.973	-0.680	0.046	0.014	0.094	-0.011	-0.133	0.027
		HYDR	0.052	0.012	0.070	0.001	0.000	0.000	0.001	0.001

OTHR: Loads other than thermal and hydrodynamic loads

TEMP: Thermal loads

HYDR: Hydrodynamic loads

Note : Load combination includes the results of NASTRAN based on the RB/FB global FE model which is used in Appendix E of ESBWR Reactor Building Structural Design Report, Reference 2.1.2-e, as shown in Table 6.3.2-1.



Table 6.3.3-4 Combined Forces and Moments, LOCA After 6 minutes + SSE: Winter
– Load ID = 7241 (Site-Specific Seismic Load Combination RB-9a)

Location	Element ID		N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
18 Wall Below RCCV Bottom	6	OTHR	-1.400	-6.451	-0.191	-0.048	-0.575	-0.004	0.000	-0.074
		TEMP	1.177	-0.473	-0.669	0.101	1.063	-0.040	0.024	0.044
		SEIS	2.942	7.596	0.819	0.455	2.879	0.060	0.114	1.022
		HYDR	0.730	1.683	0.349	0.209	1.193	0.003	0.010	0.417
	13	OTHR	-1.324	-4.936	0.021	-0.357	-1.820	0.006	-0.005	-0.486
		TEMP	0.307	-3.027	-0.689	0.408	2.284	-0.002	0.019	0.475
		SEIS	2.990	6.667	0.680	0.657	3.767	0.017	0.025	1.312
		HYDR	0.582	1.701	0.362	0.158	0.930	0.004	0.008	0.321
	24	OTHR	-1.138	-5.397	-0.165	-0.401	-2.405	-0.001	0.002	-0.807
		TEMP	0.412	-3.041	0.146	0.425	2.350	-0.005	-0.002	0.516
		SEIS	2.106	7.069	1.196	0.659	3.721	0.015	0.022	1.154
		HYDR	0.638	1.871	0.334	0.114	0.717	0.003	0.007	0.254
19 Wall Below RCCV Mid-Height	806	OTHR	-1.128	-5.265	-0.171	0.007	0.032	-0.023	-0.013	-0.078
		TEMP	1.601	-1.332	0.182	0.235	1.292	0.083	-0.053	-0.063
		SEIS	2.715	7.082	1.180	0.103	0.122	0.103	0.064	0.143
		HYDR	0.209	1.673	0.467	0.016	0.090	0.022	0.003	0.026
	813	OTHR	-1.535	-4.861	0.161	-0.021	0.106	-0.007	0.001	-0.051
		TEMP	1.036	-2.990	-0.508	0.175	1.290	-0.027	0.006	0.450
		SEIS	2.309	6.799	0.796	0.203	0.487	0.049	0.027	0.250
		HYDR	0.162	1.735	0.485	0.023	0.089	0.007	0.002	0.076
	824	OTHR	-1.804	-5.285	-0.062	0.101	0.391	0.009	-0.001	0.084
		TEMP	0.890	-3.046	0.126	0.176	1.306	0.019	0.010	0.396
		SEIS	2.360	7.372	1.689	0.244	0.499	0.027	0.013	0.267
		HYDR	0.180	1.909	0.438	0.013	0.095	0.010	0.001	0.048
20 Wall Below RCCV Top	1606	OTHR	-0.318	-4.636	-0.041	-0.130	-0.762	0.024	0.005	0.138
		TEMP	11.606	-2.042	0.301	-0.668	-3.250	0.099	0.085	2.306
		SEIS	2.278	6.409	2.761	0.223	1.075	0.123	0.028	0.360
		HYDR	0.573	1.710	0.449	0.335	1.886	0.009	0.005	0.547
	1613	OTHR	-0.509	-4.748	0.254	-0.155	-0.762	-0.002	-0.003	0.151
		TEMP	11.229	-3.474	-0.425	-0.785	-4.386	-0.008	-0.014	2.714
		SEIS	1.605	6.417	1.899	0.240	1.485	0.033	0.018	0.592
		HYDR	0.570	1.738	0.465	0.336	1.944	0.004	0.006	0.592
	1624	OTHR	-0.137	-4.829	-0.014	-0.189	-1.171	0.006	-0.007	0.324
		TEMP	12.187	-3.970	-0.124	-0.867	-4.480	-0.001	-0.082	2.817
		SEIS	1.940	6.999	2.725	0.198	1.333	0.043	0.033	0.536
		HYDR	0.624	1.887	0.447	0.331	1.880	0.003	0.008	0.581

OTHR: Loads other than thermal, seismic and hydrodynamic loads

TEMP: Thermal loads

SEIS: Seismic loads

HYDR: Hydrodynamic loads

Note : Load combination includes the results of NASTRAN based on the RB/FB global FE model which is used in Appendix E of ESBWR Reactor Building Structural Design Report, Reference 2.1.2-e, as shown in Table 6.3.2-1.



Table 6.3.3-4 Combined Forces and Moments, LOCA After 6 minutes + SSE: Winter
– Load ID = 7241 (Site-Specific Seismic Load Combination RB-9a) (Continued)

Location	Element ID		N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
21 Exterior Wall @ EL-11.50 ~10.50m	20011	OTHR	-1.819	-3.469	-0.717	0.141	0.804	0.015	0.039	0.262
		TEMP	3.023	3.384	0.790	0.274	1.136	0.041	-0.173	0.330
		SEIS	2.212	3.459	2.195	0.719	2.803	0.032	0.055	1.107
		HYDR	0.134	0.191	0.521	0.270	1.101	0.010	0.028	0.406
	20023	OTHR	-1.161	-1.469	-0.585	-0.008	-0.247	0.013	-0.057	-0.141
		TEMP	-1.459	-1.215	1.590	1.936	3.930	0.184	0.310	0.647
		SEIS	1.327	1.953	0.794	0.532	0.597	0.101	0.629	0.404
		HYDR	0.014	0.456	0.106	0.070	0.102	0.010	0.083	0.063
	30010	OTHR	-1.224	-2.354	-0.170	-0.234	-1.284	0.011	0.002	0.895
		TEMP	0.421	2.641	-0.135	1.081	3.585	-0.018	-0.024	-0.601
		SEIS	3.058	1.953	1.026	0.436	2.379	0.029	0.027	0.869
		HYDR	0.411	0.177	0.226	0.129	0.686	0.002	0.005	0.174
	30020	OTHR	-0.970	-1.615	-0.225	-0.535	-0.786	0.017	-0.153	0.330
		TEMP	-0.090	-1.196	-0.238	0.081	1.104	0.123	-0.022	-0.270
		SEIS	0.847	1.721	1.415	0.490	0.912	0.160	0.406	0.430
		HYDR	0.030	0.605	0.155	0.026	0.126	0.006	0.044	0.039
	40001	OTHR	-0.763	-1.785	0.353	-0.320	-1.095	-0.197	0.070	0.629
		TEMP	-0.154	-0.831	0.014	0.123	1.237	-0.081	0.114	-0.310
		SEIS	0.790	1.806	1.368	0.537	1.002	0.216	0.330	0.403
		HYDR	0.030	0.624	0.134	0.044	0.114	0.006	0.045	0.032
	40011	OTHR	-1.371	-3.077	-0.028	-0.278	-1.648	-0.002	0.005	1.572
		TEMP	0.865	2.785	0.044	1.075	3.674	0.007	0.012	-0.638
		SEIS	1.584	2.452	1.304	0.425	2.280	0.016	0.021	0.762
		HYDR	0.301	0.346	0.268	0.087	0.448	0.005	0.007	0.108
22 Exterior Wall @ EL4.65 ~6.60m	22011	OTHR	0.107	-2.850	0.649	-0.005	0.094	0.012	-0.024	0.133
		TEMP	3.577	2.789	-0.075	-0.128	-0.161	0.049	0.032	-0.031
		SEIS	1.226	5.546	4.092	0.153	0.818	0.090	0.050	0.715
		HYDR	0.217	0.746	0.584	0.012	0.084	0.019	0.003	0.159
	22023	OTHR	-0.068	-1.637	-0.059	0.049	0.031	-0.067	0.053	0.011
		TEMP	1.984	-3.558	-1.991	0.092	0.423	-0.047	0.570	0.405
		SEIS	0.750	5.668	3.527	0.299	0.222	0.141	0.357	0.148
		HYDR	0.049	0.415	0.288	0.097	0.032	0.026	0.029	0.010
	32010	OTHR	0.037	-1.940	0.038	-0.019	-0.007	0.005	0.000	-0.068
		TEMP	14.408	6.124	0.009	-2.798	-2.759	0.004	-0.008	0.040
		SEIS	1.206	3.569	3.077	0.057	0.356	0.022	0.004	0.219
		HYDR	0.256	0.299	0.303	0.016	0.039	0.004	0.001	0.099
	32020	OTHR	-0.012	-1.900	0.169	-0.028	-0.038	-0.040	-0.009	0.023
		TEMP	0.445	4.720	2.524	-0.285	-1.833	-0.377	0.922	0.167
		SEIS	0.525	6.282	2.371	0.441	0.184	0.173	0.243	0.069
		HYDR	0.028	0.390	0.200	0.064	0.007	0.011	0.048	0.005
	42001	OTHR	-0.017	-1.953	0.081	-0.012	-0.070	0.055	0.004	0.046
		TEMP	2.451	3.607	2.534	-0.371	-1.611	-0.058	-0.794	-0.254
		SEIS	0.379	6.366	2.517	0.289	0.162	0.239	0.354	0.049
		HYDR	0.048	0.408	0.224	0.083	0.007	0.008	0.033	0.002
	42011	OTHR	-0.245	-2.297	-0.043	-0.036	-0.101	-0.003	0.004	-0.040
		TEMP	12.432	4.405	0.143	-2.975	-2.774	0.081	0.081	0.172
		SEIS	1.202	3.902	3.709	0.069	0.408	0.038	0.048	0.184
		HYDR	0.159	0.532	0.361	0.031	0.033	0.008	0.004	0.093

OTHR: Loads other than thermal, seismic and hydrodynamic loads

TEMP: Thermal loads

SEIS: Seismic loads

HYDR: Hydrodynamic loads

Note : Load combination includes the results of NASTRAN based on the RB/FB global FE model which is used in Appendix E of ESBWR Reactor Building Structural Design Report, Reference 2.1.2-e, as shown in Table 6.3.2-1.



**Table 6.3.3-4 Combined Forces and Moments, LOCA After 6 minutes + SSE: Winter
– Load ID = 7241 (Site-Specific Seismic Load Combination RB-9a) (Continued)**

Location	Element ID		N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
23 Exterior Wall @ EL22.50 ~24.60m	24211	OTHR	0.150	-1.585	0.081	-0.023	-0.200	0.012	0.003	-0.207
		TEMP	4.177	2.901	-0.313	0.092	0.628	0.014	-0.122	1.431
		SEIS	0.931	4.603	3.707	0.152	0.641	0.042	0.007	0.711
		HYDR	0.142	0.484	0.283	0.030	0.133	0.015	0.002	0.151
	24224	OTHR	-0.026	-1.353	0.185	0.028	-0.018	-0.022	-0.043	-0.022
		TEMP	0.340	4.642	-3.562	0.871	-0.344	-0.446	-0.824	-0.417
		SEIS	0.511	8.980	3.791	0.769	1.137	0.261	0.367	1.272
		HYDR	0.024	0.485	0.236	0.095	0.064	0.024	0.047	0.068
	34210	OTHR	0.361	-0.815	0.071	0.004	0.075	0.000	0.003	0.033
		TEMP	15.323	4.794	-0.317	-2.778	-2.409	0.015	-0.011	0.104
		SEIS	1.058	1.986	3.456	0.103	0.608	0.012	0.025	0.194
		HYDR	0.202	0.102	0.171	0.015	0.077	0.009	0.001	0.041
	34220	OTHR	0.058	-1.197	-0.027	0.047	0.006	0.000	0.033	-0.001
		TEMP	1.721	4.437	2.297	0.980	-1.464	-0.240	1.609	0.013
		SEIS	0.159	3.297	2.210	0.111	0.114	0.027	0.079	0.025
		HYDR	0.028	0.231	0.098	0.036	0.015	0.017	0.023	0.007
	44201	OTHR	0.024	-1.285	-0.109	0.049	0.012	0.004	-0.035	-0.006
		TEMP	1.001	5.209	0.300	0.668	-1.698	0.337	-1.911	0.044
		SEIS	0.167	3.795	2.479	0.068	0.041	0.040	0.109	0.024
		HYDR	0.026	0.280	0.164	0.033	0.005	0.003	0.024	0.004
24 Basemat @ Wall Below RCCV	90140	OTHR	-3.142	-2.669	0.148	-1.147	-0.481	1.613	-1.900	1.694
		TEMP	1.052	1.448	1.374	0.756	-0.217	-0.971	-0.682	-0.069
		SEIS	2.801	1.113	1.986	3.720	2.589	3.423	2.095	2.337
		HYDR	0.511	0.359	0.401	0.987	0.702	0.218	0.702	0.721
	90182	OTHR	-2.479	-2.537	-0.046	0.232	-1.054	-0.033	0.049	0.446
		TEMP	1.619	0.481	0.610	-0.246	-3.861	0.184	-0.141	2.769
		SEIS	2.544	0.415	1.472	1.264	3.140	0.509	0.312	2.146
		HYDR	0.940	0.180	0.184	0.566	0.378	0.154	0.197	0.791
	90111	OTHR	-3.922	-2.463	-0.021	-1.672	0.197	-0.220	0.145	0.119
		TEMP	0.567	2.209	-0.001	-4.129	-0.522	0.050	2.860	0.127
		SEIS	0.479	1.371	1.951	3.034	1.044	0.680	1.765	0.565
		HYDR	0.141	0.811	0.051	0.274	0.454	0.121	0.736	0.189

OTHR: Loads other than thermal, seismic and hydrodynamic loads

TEMP: Thermal loads

SEIS: Seismic loads

HYDR: Hydrodynamic loads

Note : Load combination includes the results of NASTRAN based on the RB/FB global FE model which is used in Appendix E of ESBWR Reactor Building Structural Design Report, Reference 2.1.2-e, as shown in Table 6.3.2-1.



Table 6.3.3-4 Combined Forces and Moments, LOCA After 6 minutes + SSE: Winter
– Load ID = 7241 (Site-Specific Seismic Load Combination RB-9a) (Continued)

Location	Element ID		N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
25 Slab EL4.65m @ RCCV	93140	OTHR	-0.355	0.056	0.234	0.095	0.110	-0.088	0.129	-0.109
		TEMP	-0.669	2.312	4.286	-0.515	-0.395	0.287	-0.135	0.111
		SEIS	1.713	0.333	0.267	0.269	0.210	0.146	0.126	0.111
		HYDR	0.182	0.196	0.238	0.036	0.027	0.036	0.010	0.012
	93182	OTHR	0.125	-0.144	0.022	0.009	0.070	0.006	-0.004	-0.055
		TEMP	4.229	-4.036	-1.098	-0.354	-1.829	-0.083	0.075	1.370
		SEIS	0.313	0.148	0.131	0.128	0.637	0.030	0.030	0.587
		HYDR	0.290	0.073	0.082	0.025	0.042	0.004	0.005	0.108
	93111	OTHR	-0.185	0.248	-0.015	0.018	-0.002	-0.001	-0.010	-0.005
		TEMP	-3.602	4.956	-0.257	-1.768	-0.316	-0.047	1.178	0.000
		SEIS	0.185	0.254	0.154	0.537	0.097	0.022	0.434	0.005
		HYDR	0.073	0.316	0.068	0.013	0.021	0.002	0.066	0.002
26 Slab EL17.5m @ RCCV	96144	OTHR	-0.003	0.471	0.581	0.117	0.124	-0.097	0.133	-0.113
		TEMP	-0.269	4.712	6.965	-0.230	-0.125	0.167	-0.073	0.023
		SEIS	0.611	0.374	0.224	0.221	0.196	0.136	0.109	0.086
		HYDR	0.056	0.021	0.228	0.068	0.057	0.034	0.013	0.015
	96186	OTHR	0.748	-0.307	-0.071	0.006	0.060	0.000	-0.004	-0.086
		TEMP	6.688	-4.125	-1.418	-0.091	-0.316	-0.048	0.016	0.347
		SEIS	0.532	0.188	0.210	0.115	0.599	0.026	0.031	0.481
		HYDR	0.176	0.097	0.118	0.035	0.162	0.006	0.008	0.130
	96113	OTHR	-0.374	1.228	-0.107	0.112	0.048	-0.008	0.047	0.016
		TEMP	-8.342	2.574	-1.682	-4.481	-2.783	-0.199	1.240	-0.059
		SEIS	0.090	1.066	0.667	1.234	0.140	0.053	1.033	0.124
		HYDR	0.054	0.335	0.192	0.246	0.059	0.009	0.189	0.020
27 Slab EL27.0m @ RCCV	98472	OTHR	0.538	0.462	-0.046	0.176	0.270	-0.145	0.331	-0.357
		TEMP	-0.778	-0.772	5.392	-0.313	0.031	-0.311	0.451	-0.561
		SEIS	0.794	0.877	0.373	0.464	0.714	0.577	0.448	0.527
		HYDR	0.100	0.049	0.146	0.061	0.079	0.039	0.048	0.051
	98514	OTHR	0.298	0.383	0.033	-0.004	-0.213	0.008	-0.011	-0.055
		TEMP	0.397	-2.323	-1.289	-0.515	0.047	-0.042	0.045	-0.511
		SEIS	0.669	0.096	0.371	0.189	1.155	0.076	0.047	0.772
		HYDR	0.170	0.075	0.161	0.027	0.127	0.001	0.002	0.100
	98424	OTHR	-0.221	1.168	-0.045	0.656	0.262	-0.086	-0.778	-0.060
		TEMP	-9.063	-6.855	-1.452	1.316	-0.418	0.194	-5.559	-0.101
		SEIS	1.057	1.196	3.487	2.644	0.649	0.155	1.814	0.149
		HYDR	0.047	0.148	0.092	0.231	0.096	0.014	0.157	0.010

OTHR: Loads other than thermal, seismic and hydrodynamic loads

TEMP: Thermal loads

SEIS: Seismic loads

HYDR: Hydrodynamic loads

Note : Load combination includes the results of NASTRAN based on the RB/FB global FE model which is used in Appendix E of ESBWR Reactor Building Structural Design Report, Reference 2.1.2-e, as shown in Table 6.3.2-1.



Table 6.3.3-4 Combined Forces and Moments, LOCA After 6 minutes + SSE: Winter
– Load ID = 7241 (Site-Specific Seismic Load Combination RB-9a) (Continued)

Location	Element ID		N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
28 Pool Girder @ Storage Pool	123054	OTHR	0.281	-0.342	0.594	0.061	0.034	-0.072	-0.036	-0.044
		TEMP	1.314	-2.832	1.430	2.281	2.120	0.027	-0.232	0.482
		SEIS	0.569	3.326	1.105	0.205	0.094	0.091	0.049	0.123
		HYDR	0.118	0.151	0.128	0.010	0.008	0.005	0.012	0.012
	123154	OTHR	0.616	-0.173	0.550	0.073	0.032	-0.064	-0.050	0.021
		TEMP	1.031	0.747	-0.407	1.925	1.145	-0.338	-0.086	0.247
		SEIS	1.837	0.841	1.008	0.167	0.070	0.158	0.061	0.020
		HYDR	0.215	0.029	0.123	0.014	0.009	0.016	0.006	0.001
29 Pool Girder @ Cavity	123062	OTHR	0.376	-0.508	-0.685	-0.003	0.071	0.008	0.031	0.052
		TEMP	-1.254	-0.148	-0.719	0.101	0.323	0.027	0.057	0.172
		SEIS	0.576	1.124	0.540	0.154	0.283	0.046	0.080	0.160
		HYDR	0.126	0.015	0.096	0.008	0.011	0.004	0.005	0.003
	123162	OTHR	0.829	-0.194	-0.510	0.013	-0.014	0.007	0.005	-0.006
		TEMP	-1.691	-0.032	-0.470	0.128	-0.117	-0.003	-0.151	0.085
		SEIS	1.895	0.871	0.309	0.277	0.119	0.030	0.166	0.037
		HYDR	0.318	0.014	0.091	0.016	0.010	0.003	0.011	0.003
30 Pool Girder @ Fuel Pool	123067	OTHR	0.292	-0.040	-0.373	-0.019	-0.061	-0.010	-0.071	-0.038
		TEMP	-2.405	-6.001	-1.842	0.639	0.439	-0.117	-0.150	0.470
		SEIS	0.766	2.994	1.977	0.106	0.097	0.102	0.127	0.170
		HYDR	0.124	0.755	0.287	0.021	0.020	0.008	0.017	0.021
	123167	OTHR	0.054	-0.040	-0.424	0.007	-0.031	0.027	-0.064	0.001
		TEMP	-2.204	-2.669	-2.246	0.268	-0.449	-0.228	-0.011	0.180
		SEIS	0.932	0.809	1.827	0.065	0.104	0.067	0.074	0.028
		HYDR	0.336	0.219	0.315	0.014	0.006	0.005	0.008	0.003
31 MS Tunnel Wall and Slab	150122	OTHR	0.016	-0.187	0.341	0.022	0.085	0.015	-0.008	-0.058
		TEMP	0.224	-0.515	1.901	1.053	3.140	-0.007	-0.584	0.364
		SEIS	0.043	0.340	0.351	0.069	0.221	0.044	0.020	0.189
		HYDR	0.013	0.039	0.004	0.006	0.024	0.004	0.002	0.014
	96611	OTHR	-0.038	0.587	-0.035	0.059	-0.079	-0.053	-0.071	0.018
		TEMP	-0.447	4.103	-0.332	-1.287	-7.109	-0.423	0.426	0.209
		SEIS	0.034	0.440	0.046	0.183	0.626	0.129	0.128	0.071
		HYDR	0.007	0.053	0.008	0.031	0.072	0.013	0.011	0.006
	98614	OTHR	-0.019	-0.246	-0.018	-0.132	-0.854	-0.114	-0.011	0.046
		TEMP	-0.187	1.989	-0.145	-0.861	-10.477	-0.011	0.470	0.303
		SEIS	0.049	0.404	0.040	0.188	0.962	0.293	0.087	0.053
		HYDR	0.004	0.081	0.005	0.004	0.040	0.006	0.001	0.007
32 IC/PCCS Pool Wall in NS Dir.	125051	OTHR	0.114	0.016	0.234	-0.029	-0.007	0.000	-0.022	0.009
		TEMP	-0.257	-0.976	-0.150	-0.013	-0.016	-0.001	-0.024	-0.015
		SEIS	0.163	1.653	1.292	0.010	0.076	0.004	0.016	0.059
		HYDR	0.011	0.066	0.042	0.002	0.001	0.000	0.002	0.001
	125151	OTHR	0.184	-0.043	0.179	-0.038	-0.011	-0.001	-0.034	0.001
		TEMP	-0.404	-0.680	0.529	0.018	0.055	0.012	-0.030	-0.051
		SEIS	0.200	0.661	1.067	0.003	0.014	0.012	0.022	0.013
		HYDR	0.027	0.037	0.047	0.003	0.001	0.000	0.003	0.000
	125055	OTHR	0.172	-0.068	-0.087	0.010	0.031	0.002	0.015	0.024
		TEMP	-0.601	0.281	0.050	0.008	0.023	0.001	0.007	0.002
		SEIS	0.266	0.203	0.532	0.033	0.140	0.006	0.051	0.096
		HYDR	0.032	0.031	0.064	0.001	0.001	0.000	0.001	0.000
	125155	OTHR	0.311	-0.003	-0.068	0.001	-0.016	-0.001	-0.009	0.013
		TEMP	-1.201	-0.035	0.047	0.008	0.037	-0.005	-0.061	0.002
		SEIS	0.766	0.139	0.461	0.019	0.042	0.009	0.051	0.058
		HYDR	0.052	0.012	0.069	0.001	0.000	0.000	0.001	0.001

OTHR: Loads other than thermal, seismic and hydrodynamic loads

TEMP: Thermal loads

SEIS: Seismic loads

HYDR: Hydrodynamic loads

Note : Load combination includes the results of NASTRAN based on the RB/FB global FE model which is used in Appendix E of ESBWR Reactor Building Structural Design Report, Reference 2.1.2-e, as shown in Table 6.3.2-1.



Table 6.3.3-5 Combined Forces and Moments, LOCA After 72 hours + SSE: Winter
– Load ID = 7441 (Site-Specific Seismic Load Combination RB-9b)

	Element ID		N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
18 Wall Below RCCV Bottom	6	OTHR	-1.459	-6.276	-0.223	-0.012	-0.366	-0.005	0.001	-0.005
		TEMP	0.745	-0.977	-0.895	0.238	1.920	-0.053	0.044	0.293
		SEIS	2.942	7.596	0.819	0.455	2.879	0.060	0.114	1.022
		HYDR	0.564	1.225	0.276	0.162	0.924	0.002	0.008	0.323
	13	OTHR	-1.372	-4.789	0.011	-0.318	-1.598	0.006	-0.005	-0.417
		TEMP	-0.174	-4.065	-0.782	0.604	3.357	-0.002	0.023	0.785
		SEIS	2.990	6.667	0.680	0.657	3.767	0.017	0.025	1.312
		HYDR	0.446	1.240	0.285	0.124	0.725	0.003	0.006	0.250
	24	OTHR	-1.209	-5.232	-0.159	-0.360	-2.171	-0.001	0.003	-0.735
		TEMP	0.101	-3.765	0.212	0.594	3.314	-0.007	-0.003	0.779
		SEIS	2.106	7.069	1.196	0.659	3.721	0.015	0.022	1.154
		HYDR	0.491	1.370	0.273	0.092	0.573	0.003	0.005	0.203
19 Wall Below RCCV Mid-Height	806	OTHR	-1.110	-5.086	-0.192	0.010	0.050	-0.021	-0.013	-0.074
		TEMP	1.907	-2.149	0.225	0.307	1.688	0.090	-0.068	-0.082
		SEIS	2.715	7.082	1.180	0.103	0.122	0.103	0.064	0.143
		HYDR	0.151	1.212	0.367	0.012	0.070	0.018	0.002	0.020
	813	OTHR	-1.511	-4.728	0.153	-0.017	0.125	-0.006	0.002	-0.040
		TEMP	1.360	-3.986	-0.566	0.221	1.702	-0.034	0.006	0.602
		SEIS	2.309	6.799	0.796	0.203	0.487	0.049	0.027	0.250
		HYDR	0.116	1.258	0.385	0.017	0.068	0.007	0.002	0.059
	824	OTHR	-1.789	-5.114	-0.055	0.106	0.407	0.009	-0.001	0.095
		TEMP	1.151	-3.732	0.198	0.224	1.729	0.027	0.015	0.502
		SEIS	2.360	7.372	1.689	0.244	0.499	0.027	0.013	0.267
		HYDR	0.127	1.390	0.359	0.009	0.073	0.009	0.001	0.038
20 Wall Below RCCV Top	1606	OTHR	-0.166	-4.464	-0.065	-0.178	-1.038	0.024	0.005	0.223
		TEMP	15.858	-3.114	0.381	-0.839	-4.009	0.124	0.101	3.042
		SEIS	2.278	6.409	2.761	0.223	1.075	0.123	0.028	0.360
		HYDR	0.485	1.233	0.351	0.259	1.447	0.006	0.005	0.427
	1613	OTHR	-0.359	-4.640	0.249	-0.204	-1.042	-0.003	-0.003	0.243
		TEMP	15.713	-4.649	-0.420	-1.005	-5.538	-0.011	-0.016	3.612
		SEIS	1.605	6.417	1.899	0.240	1.485	0.033	0.018	0.592
		HYDR	0.476	1.260	0.360	0.256	1.476	0.003	0.006	0.454
	1624	OTHR	0.030	-4.654	-0.010	-0.239	-1.464	0.006	-0.007	0.420
		TEMP	16.688	-4.842	-0.107	-1.115	-5.549	0.001	-0.106	3.698
		SEIS	1.940	6.999	2.725	0.198	1.333	0.043	0.033	0.536
		HYDR	0.524	1.371	0.354	0.254	1.436	0.003	0.008	0.449

OTHR: Loads other than thermal, seismic and hydrodynamic loads

TEMP: Thermal loads

SEIS: Seismic loads

HYDR: Hydrodynamic loads

Note : Load combination includes the results of NASTRAN based on the RB/FB global FE model which is used in Appendix E of ESBWR Reactor Building Structural Design Report, Reference 2.1.2-e, as shown in Table 6.3.2-1.



Table 6.3.3-5 Combined Forces and Moments, LOCA After 72 hours + SSE: Winter
- Load ID = 7441 (Site-Specific Seismic Load Combination RB-9b) (Continued)

	Element ID		N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
21 Exterior Wall @ EL-11.50 ~-10.50m	20011	OTHR	-1.805	-3.402	-0.714	0.158	0.865	0.016	0.037	0.280
		TEMP	3.314	4.817	0.922	0.447	1.837	0.052	-0.225	0.576
		SEIS	2.212	3.459	2.195	0.719	2.803	0.032	0.055	1.107
		HYDR	0.099	0.152	0.412	0.204	0.828	0.007	0.021	0.305
	20023	OTHR	-1.160	-1.474	-0.591	-0.013	-0.242	0.012	-0.056	-0.139
		TEMP	-1.453	-1.169	1.549	1.890	4.020	0.180	0.322	0.683
		SEIS	1.327	1.953	0.794	0.532	0.597	0.101	0.629	0.404
		HYDR	0.011	0.336	0.082	0.053	0.078	0.008	0.064	0.048
	30010	OTHR	-1.196	-2.341	-0.172	-0.212	-1.176	0.010	0.001	0.872
		TEMP	0.688	3.733	-0.258	1.289	4.763	-0.022	-0.031	-0.865
		SEIS	3.058	1.953	1.026	0.436	2.379	0.029	0.027	0.869
		HYDR	0.304	0.132	0.184	0.100	0.526	0.002	0.004	0.133
	30020	OTHR	-0.963	-1.641	-0.229	-0.543	-0.782	0.019	-0.151	0.330
		TEMP	-0.058	-1.477	-0.392	0.021	1.209	0.144	-0.026	-0.282
		SEIS	0.847	1.721	1.415	0.490	0.912	0.160	0.406	0.430
		HYDR	0.024	0.444	0.117	0.021	0.092	0.004	0.033	0.028
	40001	OTHR	-0.760	-1.807	0.367	-0.327	-1.086	-0.198	0.069	0.628
		TEMP	-0.090	-1.141	0.056	0.039	1.330	-0.097	0.105	-0.322
		SEIS	0.790	1.806	1.368	0.537	1.002	0.216	0.330	0.403
		HYDR	0.024	0.458	0.102	0.034	0.083	0.005	0.034	0.022
	40011	OTHR	-1.371	-3.050	-0.027	-0.253	-1.527	-0.001	0.005	1.546
		TEMP	1.295	3.630	0.051	1.243	4.654	0.011	0.015	-0.844
		SEIS	1.584	2.452	1.304	0.425	2.280	0.016	0.021	0.762
		HYDR	0.232	0.250	0.214	0.069	0.354	0.003	0.006	0.085
22 Exterior Wall @ EL4.65 ~-6.60m	22011	OTHR	0.178	-2.796	0.636	-0.005	0.104	0.012	-0.025	0.147
		TEMP	5.080	4.474	-0.209	-0.175	-0.228	0.067	0.045	0.074
		SEIS	1.226	5.546	4.092	0.153	0.818	0.090	0.050	0.715
		HYDR	0.173	0.555	0.436	0.009	0.057	0.014	0.002	0.115
	22023	OTHR	-0.060	-1.627	-0.051	0.070	0.037	-0.071	0.046	0.010
		TEMP	2.211	-3.114	-2.141	0.528	0.492	-0.052	0.386	0.393
		SEIS	0.750	5.668	3.527	0.299	0.222	0.141	0.357	0.148
		HYDR	0.037	0.295	0.213	0.080	0.023	0.019	0.022	0.008
	32010	OTHR	0.125	-1.926	0.034	-0.019	0.005	0.006	0.000	-0.086
		TEMP	16.739	7.724	-0.075	-2.893	-3.003	-0.001	-0.014	0.022
		SEIS	1.206	3.569	3.077	0.057	0.356	0.022	0.004	0.219
		HYDR	0.201	0.217	0.231	0.014	0.033	0.003	0.001	0.076
	32020	OTHR	-0.004	-1.883	0.207	-0.013	-0.034	-0.047	0.001	0.025
		TEMP	0.653	4.869	2.518	0.104	-1.860	-0.395	1.226	0.199
		SEIS	0.525	6.282	2.371	0.441	0.184	0.173	0.243	0.069
		HYDR	0.023	0.275	0.154	0.054	0.005	0.010	0.040	0.004
	42001	OTHR	-0.007	-1.928	0.099	0.009	-0.065	0.058	-0.003	0.048
		TEMP	2.720	3.801	2.644	0.130	-1.563	-0.051	-0.998	-0.239
		SEIS	0.379	6.366	2.517	0.289	0.162	0.239	0.354	0.049
		HYDR	0.039	0.291	0.171	0.069	0.005	0.006	0.028	0.002
	42011	OTHR	-0.172	-2.235	-0.036	-0.039	-0.095	-0.004	0.004	-0.056
		TEMP	14.110	5.515	0.234	-3.164	-3.046	0.073	0.090	0.169
		SEIS	1.202	3.902	3.709	0.069	0.408	0.038	0.048	0.184
		HYDR	0.134	0.389	0.271	0.027	0.032	0.007	0.004	0.077

OTHR: Loads other than thermal, seismic and hydrodynamic loads

TEMP: Thermal loads

SEIS: Seismic loads

HYDR: Hydrodynamic loads

Note : Load combination includes the results of NASTRAN based on the RB/FB global FE model which is used in Appendix E of ESBWR Reactor Building Structural Design Report, Reference 2.1.2-e, as shown in Table 6.3.2-1.



**Table 6.3.3-5 Combined Forces and Moments, LOCA After 72 hours + SSE: Winter
– Load ID = 7441 (Site-Specific Seismic Load Combination RB-9b) (Continued)**

	Element ID		N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
23 Exterior Wall @ EL22.50 ~24.60m	24211	OTHR	0.226	-1.528	0.079	-0.012	-0.136	0.013	0.004	-0.237
		TEMP	6.073	5.669	-0.239	0.176	0.982	0.008	-0.147	1.336
		SEIS	0.931	4.603	3.707	0.152	0.641	0.042	0.007	0.711
		HYDR	0.102	0.359	0.211	0.022	0.100	0.011	0.002	0.109
	24224	OTHR	-0.023	-1.406	0.156	0.025	-0.013	-0.017	-0.037	-0.021
		TEMP	1.011	5.349	-3.664	1.966	0.071	-0.637	-1.563	-0.323
		SEIS	0.511	8.980	3.791	0.769	1.137	0.261	0.367	1.272
		HYDR	0.017	0.354	0.169	0.068	0.046	0.018	0.034	0.049
	34210	OTHR	0.440	-0.801	0.073	0.005	0.103	0.000	0.002	0.042
		TEMP	21.813	5.545	-0.581	-2.903	-2.819	0.035	-0.002	-0.128
		SEIS	1.058	1.986	3.456	0.103	0.608	0.012	0.025	0.194
		HYDR	0.147	0.074	0.125	0.010	0.055	0.006	0.001	0.030
	34220	OTHR	0.061	-1.255	-0.002	0.046	0.014	0.002	0.032	-0.002
		TEMP	2.794	5.432	4.414	2.629	-1.178	-0.711	2.571	0.094
		SEIS	0.159	3.297	2.210	0.111	0.114	0.027	0.079	0.025
		HYDR	0.020	0.170	0.072	0.025	0.010	0.012	0.016	0.005
	44201	OTHR	0.024	-1.326	-0.064	0.050	0.018	0.002	-0.032	-0.007
		TEMP	1.793	6.586	0.562	2.230	-1.491	0.539	-2.967	0.044
		SEIS	0.167	3.795	2.479	0.068	0.041	0.040	0.109	0.024
		HYDR	0.018	0.206	0.118	0.023	0.004	0.003	0.017	0.003
24 Basemat @ Wall Below RCCV	90140	OTHR	-3.147	-2.640	0.202	-0.982	-0.349	1.403	-1.887	1.660
		TEMP	0.838	1.691	1.751	-0.171	-1.046	-1.095	-1.135	0.139
		SEIS	2.801	1.113	1.986	3.720	2.589	3.423	2.095	2.337
		HYDR	0.384	0.272	0.318	0.741	0.524	0.189	0.522	0.533
	90182	OTHR	-2.369	-2.527	-0.049	0.166	-0.817	-0.005	0.044	0.431
		TEMP	1.908	0.687	0.488	-0.873	-5.527	0.260	-0.110	3.825
		SEIS	2.544	0.415	1.472	1.264	3.140	0.509	0.312	2.146
		HYDR	0.703	0.135	0.141	0.425	0.324	0.130	0.153	0.588
	90111	OTHR	-3.909	-2.406	-0.028	-1.440	0.138	-0.188	0.132	0.116
		TEMP	0.733	2.908	-0.011	-5.322	-1.147	0.107	3.687	0.151
		SEIS	0.479	1.371	1.951	3.034	1.044	0.680	1.765	0.565
		HYDR	0.099	0.619	0.041	0.248	0.342	0.104	0.550	0.150

OTHR: Loads other than thermal, seismic and hydrodynamic loads

TEMP: Thermal loads

SEIS: Seismic loads

HYDR: Hydrodynamic loads

Note : Load combination includes the results of NASTRAN based on the RB/FB global FE model which is used in Appendix E of ESBWR Reactor Building Structural Design Report, Reference 2.1.2-e, as shown in Table 6.3.2-1.



Table 6.3.3-5 Combined Forces and Moments, LOCA After 72 hours + SSE: Winter
– Load ID = 7441 (Site-Specific Seismic Load Combination RB-9b) (Continued)

Location	Element ID		N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
25 Slab EL4.65m @ RCCV	93140	OTHR	-0.338	0.086	0.260	0.104	0.116	-0.095	0.130	-0.110
		TEMP	-0.383	3.018	5.804	-0.739	-0.564	0.413	-0.192	0.163
		SEIS	1.713	0.333	0.267	0.269	0.210	0.146	0.126	0.111
		HYDR	0.141	0.153	0.201	0.027	0.019	0.026	0.008	0.009
	93182	OTHR	0.178	-0.133	0.020	0.009	0.081	0.007	-0.004	-0.051
		TEMP	6.161	-5.154	-1.518	-0.481	-2.508	-0.114	0.105	1.903
		SEIS	0.313	0.148	0.131	0.128	0.637	0.030	0.030	0.587
		HYDR	0.232	0.069	0.068	0.019	0.031	0.003	0.004	0.080
	93111	OTHR	-0.173	0.295	-0.024	0.030	-0.003	-0.001	-0.008	-0.005
		TEMP	-4.494	6.820	-0.448	-2.369	-0.414	-0.066	1.594	0.001
		SEIS	0.185	0.254	0.154	0.537	0.097	0.022	0.434	0.005
		HYDR	0.073	0.256	0.054	0.010	0.016	0.001	0.051	0.002
26 Slab EL17.5m @ RCCV	96144	OTHR	0.012	0.551	0.669	0.131	0.133	-0.104	0.136	-0.116
		TEMP	0.733	5.839	8.138	-0.232	-0.178	0.174	-0.043	0.066
		SEIS	0.611	0.374	0.224	0.221	0.196	0.136	0.109	0.086
		HYDR	0.042	0.018	0.169	0.049	0.040	0.024	0.009	0.010
	96186	OTHR	0.866	-0.359	-0.094	0.009	0.079	0.002	-0.005	-0.103
		TEMP	9.999	-4.559	-2.165	-0.150	-0.675	-0.057	0.023	0.638
		SEIS	0.532	0.188	0.210	0.115	0.599	0.026	0.031	0.481
		HYDR	0.127	0.072	0.088	0.025	0.116	0.004	0.006	0.093
	96113	OTHR	-0.447	1.387	-0.140	0.168	0.057	0.000	0.002	0.013
		TEMP	-9.165	5.149	-1.811	-4.378	-2.755	-0.237	1.010	-0.100
		SEIS	0.090	1.066	0.667	1.234	0.140	0.053	1.033	0.124
		HYDR	0.043	0.239	0.139	0.179	0.044	0.006	0.138	0.015
27 Slab EL27.0m @ RCCV	98472	OTHR	0.541	0.521	-0.068	0.159	0.239	-0.092	0.321	-0.342
		TEMP	-3.645	-3.148	5.906	-1.729	-1.315	-0.297	0.534	-0.685
		SEIS	0.794	0.877	0.373	0.464	0.714	0.577	0.448	0.527
		HYDR	0.075	0.036	0.103	0.045	0.059	0.029	0.035	0.038
	98514	OTHR	0.312	0.396	0.031	-0.011	-0.282	0.003	-0.010	-0.043
		TEMP	-2.902	-2.765	-1.440	-1.895	-1.503	-0.079	0.078	-0.381
		SEIS	0.669	0.096	0.371	0.189	1.155	0.076	0.047	0.772
		HYDR	0.121	0.054	0.118	0.020	0.094	0.001	0.001	0.074
	98424	OTHR	-0.248	1.315	-0.050	0.415	0.227	-0.104	-0.703	-0.054
		TEMP	-8.825	-1.775	-2.345	3.485	0.429	0.374	-5.774	-0.156
		SEIS	1.057	1.196	3.487	2.644	0.649	0.155	1.814	0.149
		HYDR	0.033	0.106	0.068	0.172	0.073	0.010	0.118	0.007

OTHR: Loads other than thermal, seismic and hydrodynamic loads

TEMP: Thermal loads

SEIS: Seismic loads

HYDR: Hydrodynamic loads

Note : Load combination includes the results of NASTRAN based on the RB/FB global FE model which is used in Appendix E of ESBWR Reactor Building Structural Design Report, Reference 2.1.2-e, as shown in Table 6.3.2-1.



Table 6.3.3-5 Combined Forces and Moments, LOCA After 72 hours + SSE: Winter
– Load ID = 7441 (Site-Specific Seismic Load Combination RB-9b) (Continued)

Location	Element ID		N _x (MN/m)	N _y (MN/m)	N _{xy} (MN/m)	M _x (MNm/m)	M _y (MNm/m)	M _{xy} (MNm/m)	Q _x (MN/m)	Q _y (MN/m)
28 Pool Girder @ Storage Pool	123054	OTHR	0.254	0.062	0.883	0.063	0.032	-0.096	-0.040	-0.052
		TEMP	3.583	1.298	2.382	3.613	2.453	-0.343	0.113	0.317
		SEIS	0.569	3.326	1.105	0.205	0.094	0.091	0.049	0.123
		HYDR	0.085	0.112	0.096	0.007	0.006	0.004	0.008	0.009
	123154	OTHR	0.469	-0.118	0.803	0.073	0.035	-0.096	-0.061	0.024
		TEMP	3.638	3.575	-2.911	3.372	1.303	-0.374	-0.255	0.413
		SEIS	1.837	0.841	1.008	0.167	0.070	0.158	0.061	0.020
		HYDR	0.157	0.021	0.091	0.010	0.007	0.011	0.004	0.001
29 Pool Girder @ Cavity	123062	OTHR	0.359	-0.748	-0.884	0.004	0.130	0.007	0.034	0.079
		TEMP	0.505	0.115	-1.385	3.836	3.893	0.008	0.034	0.188
		SEIS	0.576	1.124	0.540	0.154	0.283	0.046	0.080	0.160
		HYDR	0.088	0.010	0.070	0.006	0.008	0.003	0.003	0.002
	123162	OTHR	1.266	-0.294	-0.641	0.030	-0.001	0.004	-0.012	-0.011
		TEMP	1.929	0.409	-1.840	3.803	2.820	0.092	-0.288	0.644
		SEIS	1.895	0.871	0.309	0.277	0.119	0.030	0.166	0.037
		HYDR	0.233	0.010	0.066	0.012	0.008	0.002	0.008	0.002
30 Pool Girder @ Fuel Pool	123067	OTHR	0.253	0.356	-0.750	-0.024	-0.063	0.006	-0.059	-0.044
		TEMP	-2.101	-7.271	-3.005	3.592	3.540	-0.636	0.317	0.815
		SEIS	0.766	2.994	1.977	0.106	0.097	0.102	0.127	0.170
		HYDR	0.090	0.556	0.209	0.015	0.014	0.006	0.012	0.015
	123167	OTHR	-0.044	0.041	-0.769	0.005	-0.035	0.028	-0.062	0.004
		TEMP	-0.679	-2.776	-3.132	2.749	1.834	-0.242	-0.176	0.616
		SEIS	0.932	0.809	1.827	0.065	0.104	0.067	0.074	0.028
		HYDR	0.249	0.161	0.229	0.010	0.004	0.004	0.006	0.002
31 MS Tunnel Wall and Slab	150122	OTHR	0.024	-0.229	0.352	0.021	0.090	0.015	-0.007	-0.062
		TEMP	0.316	-0.711	1.797	0.940	3.101	0.011	-0.551	0.426
		SEIS	0.043	0.340	0.351	0.069	0.221	0.044	0.020	0.189
		HYDR	0.009	0.029	0.003	0.004	0.018	0.003	0.001	0.010
	96611	OTHR	-0.044	0.652	-0.040	0.056	-0.087	-0.054	-0.070	0.018
		TEMP	-0.557	4.662	-0.414	-1.254	-7.116	-0.406	0.420	0.206
		SEIS	0.034	0.440	0.046	0.183	0.626	0.129	0.128	0.071
		HYDR	0.005	0.039	0.006	0.023	0.054	0.009	0.008	0.004
	98614	OTHR	-0.019	-0.264	-0.018	-0.160	-0.915	-0.124	-0.002	0.049
		TEMP	-0.043	0.725	-0.043	-0.850	-9.922	-0.018	0.459	0.307
		SEIS	0.049	0.404	0.040	0.188	0.962	0.293	0.087	0.053
		HYDR	0.003	0.061	0.003	0.003	0.030	0.004	0.001	0.005
32 IC/PCCS Pool Wall in NS Dir.	125051	OTHR	0.151	0.243	0.465	-0.034	0.004	0.001	-0.026	0.018
		TEMP	-2.425	-2.173	-0.782	0.093	0.096	-0.014	0.023	0.036
		SEIS	0.163	1.653	1.292	0.010	0.076	0.004	0.016	0.059
		HYDR	0.008	0.048	0.031	0.001	0.001	0.000	0.002	0.001
	125151	OTHR	0.235	0.020	0.367	-0.043	-0.010	0.000	-0.042	0.002
		TEMP	-2.083	-1.572	1.896	0.131	0.140	0.029	0.019	-0.082
		SEIS	0.200	0.661	1.067	0.003	0.014	0.012	0.022	0.013
		HYDR	0.020	0.027	0.035	0.002	0.001	0.000	0.002	0.000
	125055	OTHR	0.188	-0.090	-0.086	0.016	0.058	0.002	0.024	0.041
		TEMP	-4.971	-0.309	0.162	0.019	0.097	0.004	-0.047	-0.011
		SEIS	0.266	0.203	0.532	0.033	0.140	0.006	0.051	0.096
		HYDR	0.023	0.022	0.047	0.000	0.000	0.000	0.000	0.000
	125155	OTHR	0.472	-0.022	-0.065	0.001	-0.024	-0.002	-0.020	0.024
		TEMP	-4.973	-0.680	0.046	0.014	0.094	-0.011	-0.133	0.027
		SEIS	0.766	0.139	0.461	0.019	0.042	0.009	0.051	0.058
		HYDR	0.039	0.008	0.050	0.000	0.000	0.000	0.001	0.000

OTHR: Loads other than thermal, seismic and hydrodynamic loads

TEMP: Thermal loads

SEIS: Seismic loads

HYDR: Hydrodynamic loads

Note: Load combination includes the results of NASTRAN based on the RB/FB global FE model which is used in Appendix E of ESBWR Reactor Building Structural Design Report, Reference 2.1.2-e, as shown in Table 6.3.2-1.



Table 6.4.1-1 Material Constants for Stress Calculations

Material	Property	Value	
Concrete	Compressive strength, f_c'	Basemat	27.6 MPa
		Top Slab	41.1 MPa
		Others	34.5 MPa
	Young's modulus	Basemat	2.49×10^4 MPa
		Top Slab	3.04×10^4 MPa
		Others	2.78×10^4 MPa
	Poisson's ratio	0.17	
Reinforcement	Yield stress, f_y	413.6 MPa	
	Young's modulus	2.00×10^5 MPa	

Table 6.4.1-2 Allowable Stress of Concrete for Membrane Plus Bending

Load Category	Load Condition	Allowable Compressive Stress (MPa)		
Factored	Primary	Basemat	20.7	$(0.75 f_c')$
		Top Slab	31.1	
		Others	25.9	
	Primary plus secondary	Basemat	23.5	$(0.85 f_c')$
		Top Slab	35.2	
		Others	29.3	
Service	Primary	Basemat	12.4	$(0.45 f_c')$
		Top Slab	18.6	
		Others	15.5	
	Primary plus secondary	Basemat	16.6	$(0.60 f_c')$
		Top Slab	24.8	
		Others	20.7	



Table 6.4.1-3 Allowable Stress of Reinforcement for Membrane Plus Bending

	Load Category	Load Condition	Allowable Stress (MPa)
Tension	Factored	Primary	372.2 (0.90 f_y)
		Primary plus secondary	
	Service	SIT	310.2 (0.75 f_y)
		Primary plus secondary	273.0 (0.66 f_y)
		Other	206.8 (0.50 f_y)
Compression	Factored	Primary	372.2 (0.90 f_y)
		Primary plus secondary	
	Service	SIT	273.0 (0.66 f_y)
		Primary plus secondary	
		Other	206.8 (0.50 f_y)

Table 6.4.1-4 Allowable Stress of Concrete for Membrane Compressive Forces

Load Category	Load Condition	Allowable Compressive Stress (MPa)		
Factored	Primary	Basemat	16.6	(0.60 f'_c)
		Top Slab	24.8	
		Others	20.7	
	Primary plus secondary	Basemat	20.7	(0.75 f'_c)
		Top Slab	31.0	
		Others	25.9	
Service	Primary	Basemat	8.3	(0.30 f'_c)
		Top Slab	12.4	
		Others	10.4	
	Primary plus secondary	Basemat	12.4	(0.45 f'_c)
		Top Slab	18.6	
		Others	15.5	



HITACHI

WG3-U71-ERD-S-0004 SH NO. 206

REV. 2

of 543

Table 7.3.1.1-1 Sectional Thicknesses and Rebar Ratios of RB Used in the Evaluation

Location	Element ID	Thick-ness (m)	Primary Reinforcement					Shear Tie		
			Position	Direction 1 ^{*1}		Direction 2 ^{*1}				
				Arrangement ^{*2}	Ratio (%)	Arrangement ^{*2}	Ratio (%)	Arrangement	Ratio (%)	
18 Wall Below RCCV Bottom	6 13 24	2.0	Inside	2-#18@300	0.860	3-#18@0.9°	1.297	#9@0.9°x300	0.721	
			Outside	3-#18@300	1.290	3-#18@0.9° +1-#18@0.9°	1.729			
19 Wall Below Below RCCV Mid-Height	806 813 824	2.0	Inside	2-#18@300	0.860	3-#18@0.9°	1.297	#9@1.2°x600	0.270	
			Outside	3-#18@300	1.290	3-#18@0.9°	1.297			
20 Wall Below RCCV Top	1606 1613 1624	2.0	Inside	2-#18@300	0.860	3-#18@0.9°	1.297	#9@1.2°x300	0.540	
			Outside	3-#18@300	1.290	3-#18@0.9° +1-#18@1.8°	1.513			
21 Exterior Wall @ EL-11.50 to -10.50m	20011	2.0	Inside	4-#11@200 +1-#11@400	1.132	5-#11@200 (+1-#11@200)	1.510	#7@400x200	0.484	
			Outside	4-#11@200 +1-#11@400	1.132	5-#11@200 (+2-#11@200)	1.761			
	20023	2.0	Inside	4-#11@200 +1-#11@400	1.132	5-#11@200 (+1-#11@200)	1.510	#7@400x200	0.484	
			Outside	4-#11@200 +1-#11@400	1.132	5-#11@200	1.258			
	30010 30020	2.0	Inside	1-#11@100 +3-#11@200	1.258	2-#11@100 +2-#11@200	1.510	6@200x200	0.710	
			Outside	2-#11@100 +2-#11@200	1.510	3-#11@100 +1-#11@200	1.761			
	40001 40011	2.0	Inside	1-#11@100 +3-#11@200	1.258	2-#11@100 +2-#11@200	1.510	6@200x200	0.710	
			Outside	2-#11@100 +2-#11@200	1.510	2-#11@100 +2-#11@200	1.510			
	22 Exterior Wall @ EL4.65 to 6.60m	22011	1.5	Inside	3-#11@200 +1-#11@400	1.174	4-#11@200 (+1-#11@200)	1.677	#7@400x200	0.484
				Outside	3-#11@200 +1-#11@400	1.174	4-#11@200 (+1-#11@200)	1.677		
22023		1.5	Inside	3-#11@200 +1-#11@400	1.174	4-#11@200	1.342	#7@400x200	0.484	
			Outside	3-#11@200 +1-#11@400	1.174	4-#11@200	1.342			
32010		1.5	Inside	3-#11@200	1.006	3-#11@200	1.006	#6@400x400	0.177	
			Outside	3-#11@200 (+2-#11@200)	1.677	3-#11@200 (+2-#11@200)	1.677			
32020		1.5	Inside	3-#11@200	1.006	3-#11@200	1.006	#6@400x400	0.177	
			Outside	3-#11@200	1.006	3-#11@200	1.006			
42001		1.5	Inside	3-#11@200	1.006	3-#11@200	1.006	#7@400x400	0.242	
			Outside	4-#11@200	1.342	4-#11@200	1.342			

Note *1: Wall Below RCCV
Exterior Wall

Direction 1: Hoop
Direction 1: Horizontal

Direction 2: Vertical
Direction 2: Vertical

Note *2: Rebar in parenthesis indicates additional bars locally required.

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 207
REV. 2 of 543

**Table 7.3.1.1-1 Sectional Thicknesses and Rebar Ratios of RB Used in the Evaluation
(Continued)**

Location	Element ID	Thick-ness (m)	Primary Reinforcement					Shear Tie	
			Position	Direction 1 ^{*1}		Direction 2 ^{*1}			
				Arrangement ^{*2}	Ratio (%)	Arrangement ^{*2}	Ratio (%)	Arrangement	Ratio (%)
22 Exterior Wall @ EL4.65 to 6.60m	42011	1.5	Inside	3-#11@200	1.006	3-#11@200	1.006	#7@400x400	0.242
			Outside	4-#11@200 (+1-#11@200)	1.677	4-#11@200 (+1-#11@200)	1.677		
23 Exterior Wall @ EL22.50 to 24.60m	24211	1.5	Inside	3-#11@200 +1-#11@400	1.174	4-#11@200 (+1-#11@200)	1.677	#7@200x200	0.968
			Outside	3-#11@200 +1-#11@400	1.174	4-#11@200	1.342		
	24224	1.5	Inside	3-#11@200 +1-#11@400	1.174	4-#11@200 (+1-#11@200)	1.677	#7@200x200	0.968
			Outside	3-#11@200 +1-#11@400	1.174	4-#11@200 (+1-#11@200)	1.677		
	34210	1.5	Inside	3-#11@200	1.006	3-#11@200	1.006	#6@400x400	0.177
			Outside	3-#11@200 (+2-#11@200)	1.677	3-#11@200 (+2-#11@200)	1.677		
	34220	1.5	Inside	3-#11@200	1.006	3-#11@200	1.006	#6@200x200	0.710
			Outside	3-#11@200	1.006	3-#11@200	1.006		
	44201	1.5	Inside	3-#11@200	1.006	3-#11@200	1.006	#7@200x200	0.968
			Outside	4-#11@200	1.342	4-#11@200	1.342		
24 Basemat @ Wall Below RCCV	90140 90182 90111	4.0	Top	5-#11@0.9°	0.401	4-#11@200 +1-#11@400	0.566	#11@0.9x400	0.801
			Bottom	5-#11@200	0.629	5-#11@200	0.629		
25 Slab EL4.65m @ RCCV	93140 93182 93111	1.0	Top	2-#11@200	1.006	2-#11@200	1.006	#5@200x200	0.500
			Bottom	2-#11@200	1.006	2-#11@200	1.006		
26 Slab EL17.5m @ RCCV	96144 96186	1.0	Top	2-#11@200	1.006	2-#11@200	1.006	#5@200x200	0.500
			Bottom	2-#11@200	1.006	2-#11@200	1.006		
	96113	1.6	Top	2-#11@200	0.629	2-#11@200	0.629	#5@200x200	0.500
			Bottom	3-#11@200	0.944	3-#11@200	0.944		

Note: Updated reinforcement arrangements from standard design are shown in red.

Note *1: Exterior Wall

Direction 1: Horizontal

Direction 2: Vertical

Slab/MS Tunnel Slab

Direction 1: N-S

Direction 2: E-W

Basemat

Direction 1: Top; Radial; Bottom; N-S

Direction 2: Top; Circumferential; Bottom; E-W

Note *2: Rebar in parenthesis indicates additional bars locally required.

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 208

REV. 2

of 543

**Table 7.3.1.1-1 Sectional Thicknesses and Rebar Ratios of RB Used in the Evaluation
(Continued)**

Location	Element ID	Thickness (m)	Position	Primary Reinforcement				Shear Tie	
				Direction 1 ¹		Direction 2 ¹		Arrangement	Ratio (%)
				Arrangement ²	Ratio (%)	Arrangement ²	Ratio (%)		
27 Slab EL27.0m @ RCCV	98472 98514	1.5	Top	3-#11@200 (+2-#11@200)	1.677	3-#11@200 (+2-#11@200)	1.677	#7@200x200	0.968
			Bottom	3-#11@200 (+3-#11@200)	2.013	3-#11@200 (+3-#11@200)	2.013		
	98424	2.4	Top	4-#11@200 (+2-#11@200)	1.258	4-#11@200 (+2-#11@200)	1.258	#7@200x200	0.968
			Bottom	4-#11@200 (+1-#11@200)	1.048	4-#11@200 (+1-#11@200)	1.048		
28 Pool Girder @ Storage Pool	123054 123154	1.6	Inside	3-#11@200	0.944	3-#11@200	0.944	#7@400x200	0.484
			Outside	3-#11@200 (+1-#11@200)	1.258	3-#11@200	0.944		
29 Pool Girder @ Cavity	123062 123162	1.6	Inside	3-#11@200	0.944	3-#11@200	0.944	#7@400x400	0.242
			Outside	3-#11@200	0.944	3-#11@200	0.944		
30 Pool Girder @ Fuel Pool	123067 123167	1.6	Inside	3-#11@200 (+1-#11@200)	1.258	3-#11@200 (+1-#11@200)	1.258	#7@400x200	0.484
			Outside	3-#11@200	0.944	3-#11@200	0.944		
31 MS Tunnel Wall and Slab	150122	1.3	Inside	2-#11@200	0.774	2-#11@200	0.774	#6@400x400	0.177
			Outside	2-#11@200 +1-#11@400	0.968	2-#11@200 +1-#11@400	0.968		
	96611	1.6	Top	2-#11@200	0.629	2-#11@200	0.629	#5@200x200	0.500
			Bottom	3-#11@200	0.944	3-#11@200	0.944		
	98614	2.4	Top	4-#11@200	0.839	4-#11@200	0.839	#5@200x200	0.500
			Bottom	3-#11@200	0.629	3-#11@200	0.629		
32 IC/PCCS Pool Wall in NS Dir.	125051 125151 125055 125155	1.0	Inside	1-#11@200 +1-#11@400	0.755	1-#11@200 +1-#11@400	0.755	#5@400x200	0.250
			Outside	2-#11@200	1.006	2-#11@200 (+1-#11@400)	1.258		

Note *1: Slab/MS Tunnel Slab

Direction 1: N-S

Direction 2: E-W

Pool Girder

Direction 1: Horizontal

Direction 2: Vertical

MS Tunnel Wall

Direction 1: Horizontal

Direction 2: Vertical

Note *2: Rebar in parenthesis indicates additional bars locally required.



Table 7.3.1.1-2 Rebar and Concrete Stresses of RB, 1.05D + 1.3L + 1.3To + 1.3W: Winter
– Load ID = 4021 (Selected Load Combination RB-4)

Location	Element ID	Concrete Stress (MPa)		Primary Reinforcement Stress (MPa)				Allowable
		Calculated	Allowable	Calculated				
				Direction 1'		Direction 2'		
				In/Top	Out/Bottom	In/Top	Out/Bottom	
18 Wall Below RCCV Bottom	6	-3.6	-29.3	2.6	3.4	-24.0	-21.2	372.2
	13	-4.0	-29.3	0.5	1.0	-27.0	-24.6	372.2
	24	-5.1	-29.3	3.2	3.1	-33.1	-22.9	372.2
19 Wall Below Below RCCV Mid-Height	806	-4.5	-29.3	2.7	3.3	-17.9	-27.7	372.2
	813	-5.2	-29.3	-0.7	0.7	-20.6	-31.7	372.2
	824	-6.1	-29.3	-1.1	-1.0	-21.3	-36.0	372.2
20 Wall Below RCCV Top	1606	-5.8	-29.3	16.8	18.3	-33.7	-12.9	372.2
	1613	-8.2	-29.3	13.9	17.0	-45.8	-8.9	372.2
	1624	-9.3	-29.3	18.3	23.3	-51.4	-11.3	372.2
21 Exterior Wall @ EL-11.50 ~10.50m	20011	-1.6	-29.3	4.5	0.7	6.0	-7.5	372.2
	20023	-5.9	-29.3	14.7	-16.8	23.6	-20.7	372.2
	30010	-1.6	-29.3	0.0	-8.8	1.1	-1.4	372.2
	30020	-1.9	-29.3	-7.1	1.0	-4.5	-11.1	372.2
	40001	-1.7	-29.3	-4.0	-0.9	-6.0	-9.0	372.2
	40011	-1.1	-29.3	0.2	-4.0	3.1	-5.3	372.2
22 Exterior Wall @ EL4.65 ~6.60m	22011	-1.2	-29.3	31.4	26.7	12.2	6.8	372.2
	22023	-5.0	-29.3	13.2	13.5	-13.0	-38.2	372.2
	32010	-0.7	-29.3	25.0	90.5	-4.2	10.8	372.2
	32020	-3.9	-29.3	4.7	44.8	-7.6	51.1	372.2
	42001	-3.4	-29.3	7.8	32.7	-10.4	27.4	372.2
	42011	-2.6	-29.3	30.6	83.4	-12.1	13.0	372.2
23 Exterior Wall @ EL22.50 ~24.60m	24211	-1.9	-29.3	8.9	17.6	-4.9	8.4	372.2
	24224	-2.4	-29.3	31.2	-0.4	9.2	9.5	372.2
	34210	-3.3	-29.3	35.1	104.6	-6.0	43.5	372.2
	34220	-0.6	-29.3	44.6	-12.1	-9.1	33.0	372.2
	44201	-0.5	-29.3	53.1	33.9	6.8	71.8	372.2
24 Basemat @ Wall Below RCCV	90140	-1.7	-23.5	-11.4	-3.2	1.6	0.0	372.2
	90182	-2.4	-23.5	-12.5	-4.6	-0.9	8.4	372.2
	90111	-3.1	-23.5	-18.6	6.7	3.0	-1.0	372.2
25 Slab EL4.65m @ RCCV	93140	-7.0	-29.3	26.6	70.8	62.6	87.9	372.2
	93182	-11.1	-29.3	19.1	19.9	-48.7	41.1	372.2
	93111	-11.0	-29.3	-47.1	48.6	33.2	37.3	372.2
26 Slab EL17.5m @ RCCV	96144	-4.3	-29.3	69.4	83.6	90.8	97.9	372.2
	96186	-5.5	-29.3	30.0	58.6	-36.7	28.6	372.2
	96113	-11.1	-29.3	-46.8	76.6	-30.4	56.1	372.2
27 Slab EL27.0m @ RCCV	98472	-7.6	-29.3	58.2	68.0	60.9	52.9	372.2
	98514	-2.7	-29.3	-3.9	13.1	-11.2	-4.5	372.2
	98424	-6.7	-29.3	-15.9	-36.4	-30.0	-24.5	372.2

Note: Negative value means compression.

Note *: Wall Below RCCV

Exterior Wall

Slab/MS Tunnel Slab

Pool Girder

MS Tunnel Wall

Basemat

Direction1: Hoop,

Direction1: Horizontal,

Direction1: N-S,

Direction1: Horizontal,

Direction1: Horizontal,

Direction1: Top; Radial, Bottom; N-S,

Direction2: Vertical

Direction2: Vertical

Direction2: E-W

Direction2: Vertical

Direction2: Vertical

Direction2: Top; Circumferential, Bottom; E-W

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 210

REV. 2

of 543

Table 7.3.1.1-2 Rebar and Concrete Stresses of RB, 1.05D + 1.3L + 1.3To + 1.3W: Winter
– Load ID = 4021 (Selected Load Combination RB-4) (Continued)

Location	Element ID	Concrete Stress (MPa)		Primary Reinforcement Stress (MPa)					
		Calculated	Allowable	Calculated				Allowable	
				Direction 1		Direction 2			
				In/Top	Out/Bottom	In/Top	Out/Bottom		
28 Pool Girder @ Storage Pool	123054	-8.7	-29.3	9.8	61.7	-43.0	-3.4	372.2	
	123154	-3.4	-29.3	20.4	96.0	4.7	66.4	372.2	
29 Pool Girder @ Cavity	123062	-1.9	-29.3	-13.2	-12.5	33.1	8.2	372.2	
	123162	-2.7	-29.3	-19.2	-18.8	15.9	3.7	372.2	
30 Pool Girder @ Fuel Pool	123067	-5.7	-29.3	-14.1	-3.6	-33.9	-26.1	372.2	
	123167	-4.0	-29.3	-13.4	-7.4	-6.5	-17.7	372.2	
31 MS Tunnel Wall and Slab	150122	-13.6	-29.3	14.0	169.7	-22.9	220.5	372.2	
	96611	-8.6	-29.3	1.4	5.1	-21.1	194.3	372.2	
	98614	-6.4	-29.3	2.8	2.6	-3.7	152.0	372.2	
32 IC/PCCS Pool Wall in NS Dir.	125051	-3.1	-29.3	21.4	15.7	3.4	-8.1	372.2	
	125151	-1.6	-29.3	-4.0	-3.0	-9.0	-6.0	372.2	
	125055	-1.3	-29.3	-7.9	-8.3	11.2	-0.4	372.2	
	125155	-2.2	-29.3	-14.7	-14.4	-1.1	1.6	372.2	

Note: Negative value means compression.

Note *: Wall Below RCCV

Exterior Wall

Slab/MS Tunnel Slab

Pool Girder

MS Tunnel Wall

Basemat

Direction1: Hoop,

Direction1: Horizontal,

Direction1: N-S,

Direction1: Horizontal,

Direction1: Horizontal,

Direction1: Top; Radial, Bottom; N-S,

Direction2: Vertical

Direction2: Vertical

Direction2: E-W

Direction2: Vertical

Direction2: Vertical

Direction2: Top; Circumferential, Bottom; E-W



Table 7.3.1.1-3 Rebar and Concrete Stresses of RB, LOCA After 6 minutes (1.5Pa):
Winter – Load ID = 6241 (Selected Load Combination RB-8a)

Location	Element ID	Concrete Stress (MPa)		Primary Reinforcement Stress (MPa)				Allowable
		Calculated	Allowable	Calculated				
				Direction 1		Direction 2		
				In/Top	Out/Bottom	In/Top	Out/Bottom	
18 Wall Below RCCV Bottom	6	-6.9	-29.3	8.0	20.8	-15.5	-38.1	372.2
	13	-6.9	-29.3	-1.6	-2.0	-16.4	-39.3	372.2
	24	-6.1	-29.3	2.5	2.5	-22.2	-37.3	372.2
19 Wall Below Below RCCV Mid-Height	806	-5.6	-29.3	13.8	6.1	-17.9	-33.1	372.2
	813	-6.3	-29.3	2.0	2.7	-21.8	-37.6	372.2
	824	-6.9	-29.3	1.2	1.2	-22.0	-40.7	372.2
20 Wall Below RCCV Top	1606	-15.9	-29.3	34.2	81.8	-63.3	41.3	372.2
	1613	-17.0	-29.3	31.6	78.3	-73.0	44.6	372.2
	1624	-16.6	-29.3	41.2	91.5	-81.1	45.0	372.2
21 Exterior Wall @ EL-11.50 ~10.50m	20011	-5.3	-29.3	32.5	20.9	51.6	-16.6	372.2
	20023	-4.9	-28.9	10.2	-13.6	15.9	-19.6	368.9
	30010	-2.8	-29.3	5.9	-7.1	24.0	-9.7	372.2
	30020	-2.2	-29.3	-5.6	2.9	-7.3	-13.2	372.2
	40001	-2.1	-29.3	-3.5	1.0	-8.0	-12.0	372.2
	40011	-2.3	-29.3	6.3	-4.5	9.6	-10.9	372.2
22 Exterior Wall @ EL4.65 ~6.60m	22011	-2.6	-29.3	80.4	66.5	27.9	21.6	372.2
	22023	-5.0	-29.3	44.0	11.3	-9.4	-25.2	372.2
	32010	-0.7	-29.3	71.5	111.0	30.6	63.9	372.2
	32020	-3.5	-29.3	9.2	40.8	-9.7	45.1	372.2
	42001	-2.8	-29.3	10.9	31.1	-12.1	34.3	372.2
	42011	-4.5	-29.3	35.5	91.4	-15.7	44.3	372.2
23 Exterior Wall @ EL22.50 ~24.60m	24211	-0.8	-29.3	61.8	41.3	47.2	7.5	372.2
	24224	-2.0	-29.3	27.0	13.1	4.3	18.7	372.2
	34210	-0.4	-29.3	92.4	165.9	22.2	114.3	372.2
	34220	-2.9	-29.3	39.8	-12.1	-16.7	33.2	372.2
24 Basemat @ Wall Below RCCV	44201	-0.6	-29.3	50.6	4.0	-16.7	39.9	372.2
	90140	-1.4	-23.5	-9.3	-8.1	1.6	-2.9	372.2
	90182	-1.8	-23.5	-9.5	23.1	6.2	5.1	372.2
25 Slab EL4.65m @ RCCV	90111	-2.4	-23.5	-13.8	3.9	32.1	10.5	372.2
	93140	-8.7	-29.3	81.5	120.6	124.2	151.8	372.2
	93182	-11.9	-29.3	60.7	72.5	-57.5	28.3	372.2
26 Slab EL17.5m @ RCCV	93111	-11.0	-29.3	-52.5	28.8	72.7	84.2	372.2
	96144	-9.9	-29.3	199.6	217.6	268.0	208.8	372.2
	96186	-7.0	-29.3	114.4	130.8	-26.9	-23.7	372.2
27 Slab EL27.0m @ RCCV	96113	-13.6	-28.8	-87.9	28.6	83.6	115.1	368.2
	98472	-5.7	-29.1	66.3	53.0	71.1	51.0	370.3
	98514	-2.6	-29.1	16.8	33.1	-6.5	18.8	370.3
	98424	-5.2	-28.1	-18.6	-30.7	-13.6	-8.6	363.0

Note: Negative value means compression.

Note *: Wall Below RCCV
 Exterior Wall
 Slab/MS Tunnel Slab
 Pool Girder
 MS Tunnel Wall
 Basemat

Direction1: Hoop,
 Direction1: Horizontal,
 Direction1: N-S,
 Direction1: Horizontal,
 Direction1: Horizontal,
 Direction1: Top; Radial, Bottom; N-S,

Direction2: Vertical
 Direction2: Vertical
 Direction2: E-W
 Direction2: Vertical
 Direction2: Vertical
 Direction2: Top; Circumferential, Bottom; E-W



HITACHI

WG3-U71-ERD-S-0004 SH NO. 212

REV. 2

of 543

**Table 7.3.1.1-3 Rebar and Concrete Stresses of RB, LOCA After 6 minutes (1.5Pa):
Winter – Load ID = 6241 (Selected Load Combination RB-8a) (Continued)**

Location	Element ID	Concrete Stress (MPa)		Primary Reinforcement Stress (MPa)					
		Calculated	Allowable	Calculated				Allowable	
				Direction 1'		Direction 2'			
				In/Top	Out/Bottom	In/Top	Out/Bottom		
28 Pool Girder @ Storage Pool	123054	-6.8	-29.0	26.7	123.4	-0.9	111.8	369.8	
	123154	-3.0	-29.0	45.6	68.3	45.8	57.6	369.8	
29 Pool Girder @ Cavity	123062	-2.7	-28.4	28.2	49.9	9.8	53.3	365.0	
	123162	-1.9	-28.4	87.7	99.7	55.1	46.6	365.0	
30 Pool Girder @ Fuel Pool	123067	-5.2	-28.4	-2.3	20.4	-17.7	12.4	365.0	
	123167	-5.6	-28.4	35.8	31.2	52.0	17.8	365.0	
31 MS Tunnel Wall and Slab	150122	-11.4	-29.3	14.7	142.2	-21.4	174.5	372.2	
	96611	-6.7	-29.3	-1.9	6.3	-9.3	189.6	372.2	
	98614	-6.3	-29.3	2.1	11.0	-6.6	138.8	372.2	
32 IC/PCCS Pool Wall in NS Dir.	125051	-1.8	-28.3	75.4	43.9	80.0	51.3	364.7	
	125151	-2.5	-28.3	74.0	42.6	54.8	34.6	364.7	
	125055	-0.9	-28.3	-2.4	2.2	1.4	20.6	364.7	
	125155	-0.7	-28.3	-2.3	-2.7	14.3	2.4	364.7	

Note: Negative value means compression.

Note *: Wall Below RCCV

Exterior Wall

Slab/MS Tunnel Slab

Pool Girder

MS Tunnel Wall

Basemat

Direction1: Hoop,

Direction1: Horizontal,

Direction1: N-S,

Direction1: Horizontal,

Direction1: Horizontal,

Direction1: Top; Radial, Bottom; N-S,

Direction2: Vertical

Direction2: Vertical

Direction2: E-W

Direction2: Vertical

Direction2: Vertical

Direction2: Top; Circumferential, Bottom; E-W



**Table 7.3.1.1-4 Rebar and Concrete Stresses, of RB: LOCA After 72 hours (1.5Pa):
Winter – Load ID = 6441 (Selected Load Combination RB-8b)**

Location	Element ID	Concrete Stress (MPa)		Primary Reinforcement Stress (MPa)				
		Calculated	Allowable	Calculated				Allowable
				Direction 1		Direction 2		
				In/Top	Out/Bottom	In/Top	Out/Bottom	
18 Wall Below RCCV Bottom	6	-7.7	-29.3	-0.5	2.7	-9.8	-40.6	372.2
	13	-8.2	-29.3	-2.0	-3.0	-11.7	-44.6	372.2
	24	-7.3	-29.3	1.3	-2.3	-15.7	-41.5	372.2
19 Wall Below Below RCCV Mid-Height	806	-6.1	-29.3	12.4	6.6	-14.4	-34.6	372.2
	813	-6.8	-29.3	2.5	4.6	-19.9	-39.9	372.2
	824	-7.3	-29.3	1.6	2.7	-18.7	-41.6	372.2
20 Wall Below RCCV Top	1606	-14.1	-29.3	52.6	97.2	-68.0	47.9	372.2
	1613	-16.7	-29.3	46.4	94.3	-81.0	51.5	372.2
	1624	-17.9	-29.3	62.2	107.8	-82.3	54.7	372.2
21 Exterior Wall @ EL-11.50 ~10.50m	20011	-4.7	-29.3	37.8	8.3	54.8	-13.1	372.2
	20023	-4.7	-28.9	8.4	-13.4	14.3	-18.8	368.9
	30010	-2.8	-29.3	6.3	-5.6	29.2	-9.2	372.2
	30020	-2.4	-29.3	-5.8	4.0	-7.2	-13.5	372.2
	40001	-2.2	-29.3	-3.8	2.4	-7.9	-12.5	372.2
	40011	-2.2	-29.3	7.0	-2.7	14.1	-9.4	372.2
22 Exterior Wall @ EL4.65 ~6.60m	22011	-1.9	-29.3	110.3	93.1	68.3	65.9	372.2
	22023	-4.6	-29.3	45.5	9.7	-6.2	-22.3	372.2
	32010	-0.6	-29.3	77.9	137.7	-2.9	63.7	372.2
	32020	-4.1	-29.3	18.4	18.7	-14.6	42.4	372.2
	42001	-1.9	-29.3	32.8	12.3	-4.2	22.6	372.2
	42011	-3.6	-29.3	37.6	96.0	-8.6	40.5	372.2
23 Exterior Wall @ EL22.50 ~24.60m	24211	-0.6	-29.3	90.1	59.1	71.0	15.2	372.2
	24224	-3.2	-29.3	60.7	-10.1	23.0	19.0	372.2
	34210	-0.3	-29.3	121.8	219.3	31.2	157.0	372.2
	34220	-2.4	-29.3	75.3	-20.3	-16.2	38.7	372.2
	44201	-0.4	-29.3	84.8	2.1	21.1	49.5	372.2
24 Basemat @ Wall Below RCCV	90140	-1.8	-23.5	-11.9	4.5	1.1	7.5	372.2
	90182	-1.8	-23.5	-9.0	6.7	18.9	5.9	372.2
	90111	-2.4	-23.5	-13.8	4.7	18.5	9.8	372.2
25 Slab EL4.65m @ RCCV	93140	-11.1	-29.3	115.0	175.0	150.3	198.1	372.2
	93182	-15.5	-29.3	76.2	85.5	-73.2	41.7	372.2
	93111	-14.1	-29.3	-65.5	43.1	87.0	95.9	372.2
26 Slab EL17.5m @ RCCV	96144	-9.8	-29.3	206.7	216.9	273.0	269.0	372.2
	96186	-8.8	-29.3	143.8	164.4	-33.5	14.9	372.2
	96113	-13.9	-28.8	-88.5	19.9	103.1	128.6	368.2
27 Slab EL27.0m @ RCCV	98472	-7.1	-27.6	6.8	58.5	18.4	56.7	359.4
	98514	-7.1	-27.6	-21.0	34.8	-22.1	43.8	359.4
	98424	-6.4	-28.1	6.2	-43.6	64.9	31.9	363.0

Note: Negative value means compression.

Note *: Wall Below RCCV

Exterior Wall

Slab/MS Tunnel Slab

Pool Girder

MS Tunnel Wall

Basemat

Direction1: Hoop,

Direction1: Horizontal,

Direction1: N-S,

Direction1: Horizontal,

Direction1: Horizontal,

Direction1: Top; Radial, Bottom; N-S,

Direction2: Vertical

Direction2: Vertical

Direction2: E-W

Direction2: Vertical

Direction2: Vertical

Direction2: Top; Circumferential, Bottom; E-W



**Table 7.3.1.1-4 Rebar and Concrete Stresses of RB, LOCA After 72 hours (1.5Pa): Winter
– Load ID = 6441 (Selected Load Combination RB-8b) (Continued)**

Location	Element ID	Concrete Stress (MPa)		Primary Reinforcement Stress (MPa)					
		Calculated	Allowable	Calculated				Allowable	
				Direction 1'		Direction 2'			
				In/Top	Out/Bottom	In/Top	Out/Bottom		
28 Pool Girder @ Storage Pool	123054	-7.6	-29.0	19.7	167.8	41.1	197.0	369.8	
	123154	-3.9	-29.0	63.7	73.4	73.4	62.6	369.8	
29 Pool Girder @ Cavity	123062	-13.6	-27.4	34.8	207.5	-3.8	190.6	358.3	
	123162	-9.5	-27.4	60.8	255.4	11.2	180.2	358.3	
30 Pool Girder @ Fuel Pool	123067	-11.3	-27.4	13.1	126.5	-24.0	114.1	358.3	
	123167	-6.8	-27.4	22.9	138.3	16.3	113.9	358.3	
31 MS Tunnel Wall and Slab	150122	-11.7	-29.3	16.4	133.9	-25.6	166.0	372.2	
	96611	-6.4	-29.3	-2.2	3.3	-6.8	192.5	372.2	
	98614	-6.7	-29.3	2.3	5.7	-10.0	127.0	372.2	
32 IC/PCCS Pool Wall in NS Dir.	125051	-2.6	-25.4	-13.4	-11.9	-8.5	-3.0	343.4	
	125151	-5.7	-25.4	82.6	60.7	85.1	61.8	343.4	
	125055	-4.7	-25.4	-30.6	-29.2	-0.8	23.5	343.4	
	125155	-3.7	-25.4	-25.3	-25.0	-1.1	0.8	343.4	

Note: Negative value means compression.

Note *: Wall Below RCCV

Exterior Wall

Slab/MS Tunnel Slab

Pool Girder

MS Tunnel Wall

Basemat

Direction1: Hoop,

Direction1: Horizontal,

Direction1: N-S,

Direction1: Horizontal,

Direction1: Horizontal,

Direction1: Top; Radial, Bottom; N-S,

Direction2: Vertical

Direction2: Vertical

Direction2: E-W

Direction2: Vertical

Direction2: Vertical

Direction2: Top; Circumferential, Bottom; E-W



**Table 7.3.1.1-5 Rebar and Concrete Stresses of RB, LOCA After 6 minutes + SSE:
Winter – Load ID = 7241 (Site-Specific Seismic Load Combination RB-9a)**

Location	Element ID	Concrete Stress (MPa)		Primary Reinforcement Stress (MPa)					
		Calculated	Allowable	Calculated				Allowable	
				Direction 1'		Direction 2'			
				In/Top	Out/Bottom	In/Top	Out/Bottom		
18 Wall	6	-10.3	-29.3	51.7	65.3	-22.1	69.4	372.2	
Below RCCV	13	-11.3	-29.3	25.6	57.2	-26.5	-62.3	372.2	
Bottom	24	-10.8	-29.3	39.4	40.6	85.5	-30.0	372.2	
19 Wall Below	806	-7.8	-29.3	95.6	47.8	58.6	-50.2	372.2	
Below RCCV	813	-8.8	-29.3	59.3	40.6	38.0	-53.0	372.2	
Mid-Height	824	-9.8	-29.3	79.6	48.0	71.2	-57.5	372.2	
20 Wall	1606	-12.3	-29.3	87.4	117.0	-80.6	80.1	372.2	
Below RCCV	1613	-14.7	-29.3	56.4	93.8	-92.2	50.8	372.2	
Top	1624	-15.5	-29.3	83.9	115.7	-98.4	84.9	372.2	
21 Exterior Wall	20011	-8.6	-29.3	67.5	109.8	53.1	113.7	372.2	
@ EL-11.50	20023	-6.3	-28.9	12.8	-19.5	20.4	-25.3	368.9	
~10.50m	30010	-5.6	-29.3	55.6	46.2	34.2	76.5	372.2	
	30020	-3.9	-29.3	-11.7	10.7	-7.6	-18.6	372.2	
	40001	-4.1	-29.3	21.0	8.4	-6.3	23.2	372.2	
	40011	-5.7	-29.3	42.4	42.6	26.6	92.9	372.2	
22 Exterior Wall	22011	-8.6	-29.3	152.6	142.2	255.4	135.4	372.2	
@ EL4.65	22023	-8.9	-29.3	124.6	56.7	70.0	47.0	372.2	
~6.60m	32010	-4.3	-29.3	175.1	199.8	158.3	236.9	372.2	
	32020	-7.4	-29.3	112.0	91.6	190.9	270.6	372.2	
	42001	-7.4	-29.3	120.2	68.4	209.2	219.0	372.2	
	42011	-6.5	-29.3	111.8	150.8	182.2	160.9	372.2	
23 Exterior Wall	24211	-5.6	-29.3	188.4	126.0	227.1	119.9	372.2	
@ EL22.50	24224	-10.8	-29.3	137.2	135.3	298.7	155.4	372.2	
~24.60m	34210	-4.8	-29.3	168.4	213.0	107.6	188.6	372.2	
	34220	-3.7	-29.3	108.0	73.6	138.0	172.5	372.2	
	44201	-4.0	-29.3	129.3	91.1	151.8	196.1	372.2	
24 Basemat	90140	-4.8	-23.5	152.3	-2.9	25.1	9.7	372.2	
@ Wall	90182	-3.8	-23.5	25.2	59.4	45.5	33.0	372.2	
Below RCCV	90111	-4.3	-23.5	-21.8	27.9	44.1	54.2	372.2	
25 Slab	93140	-10.5	-29.3	114.3	142.3	103.9	156.3	372.2	
EL4.65m	93182	-17.5	-29.3	42.2	84.3	-73.2	91.6	372.2	
@ RCCV	93111	-16.2	-29.3	-67.4	85.8	55.9	90.2	372.2	
26 Slab	96144	-10.8	-29.3	204.2	192.4	217.6	230.0	372.2	
EL17.5m	96186	-9.0	-29.3	103.8	149.1	-41.3	-35.7	372.2	
@ RCCV	96113	-15.6	-28.8	-107.0	75.4	94.9	135.1	368.2	
27 Slab	98472	-9.6	-29.1	77.7	61.6	61.5	60.3	370.3	
EL27.0m	98514	-4.9	-29.1	18.4	45.4	-18.7	36.9	370.3	
@ RCCV	98424	-8.8	-28.1	-23.4	-46.4	-20.3	-11.3	363.0	

Note: Negative value means compression.

Note *: Wall Below RCCV

Exterior Wall

Slab/MS Tunnel Slab

Pool Girder

MS Tunnel Wall

Basemat

Direction1: Hoop,

Direction1: Horizontal,

Direction1: N-S,

Direction1: Horizontal,

Direction1: Horizontal,

Direction1: Top; Radial, Bottom; N-S,

Direction2: Vertical

Direction2: Vertical

Direction2: E-W

Direction2: Vertical

Direction2: Vertical

Direction2: Top; Circumferential, Bottom; E-W



**Table 7.3.1.1-5 Rebar and Concrete Stresses of RB, LOCA After 6 minutes + SSE: Winter
– Load ID = 7241 (Site-Specific Seismic Load Combination RB-9a) (Continued)**

Location	Element ID	Concrete Stress (MPa)		Primary Reinforcement Stress (MPa)				
		Calculated	Allowable	Calculated				Allowable
				Direction 1'		Direction 2'		
				In/Top	Out/Bottom	In/Top	Out/Bottom	
28 Pool Girder @ Storage Pool	123054	-8.9	-29.0	23.8	112.9	-30.5	123.2	369.8
	123154	-3.2	-29.0	92.4	134.7	75.3	99.2	369.8
29 Pool Girder @ Cavity	123062	-3.4	-28.4	34.2	35.9	45.7	38.8	365.0
	123162	-2.1	-28.4	96.8	63.2	40.7	53.8	365.0
30 Pool Girder @ Fuel Pool	123067	-7.4	-28.4	-4.1	28.9	-35.3	-12.2	365.0
	123167	-6.7	-28.4	28.4	41.4	48.2	17.9	365.0
31 MS Tunnel Wall and Slab	150122	-12.5	-29.3	17.6	164.2	-22.6	195.8	372.2
	96611	-8.9	-29.3	-2.0	23.4	-13.7	226.8	372.2
	98614	-7.9	-29.3	4.0	27.6	-6.0	178.5	372.2
32 IC/PCCS Pool Wall in NS Dir.	125051	-3.8	-28.3	79.5	47.4	98.5	74.8	364.7
	125151	-3.8	-28.3	75.9	46.0	47.2	30.6	364.7
	125055	-1.6	-28.3	27.2	17.8	37.0	47.8	364.7
	125155	-1.8	-28.3	22.9	14.4	39.4	15.3	364.7

Note: Negative value means compression.

Note *: Wall Below RCCV

Exterior Wall

Slab/MS Tunnel Slab

Pool Girder

MS Tunnel Wall

Basemat

Direction1: Hoop,

Direction1: Horizontal,

Direction1: N-S,

Direction1: Horizontal,

Direction1: Horizontal,

Direction1: Top; Radial, Bottom; N-S,

Direction2: Vertical

Direction2: Vertical

Direction2: E-W

Direction2: Vertical

Direction2: Vertical

Direction2: Top; Circumferential, Bottom; E-W



**Table 7.3.1.1-6 Rebar and Concrete Stresses of RB, LOCA After 72 hours + SSE: Winter
– Load ID = 7441 (Site-Specific Seismic Load Combination RB-9b)**

Location	Element ID	Concrete Stress (MPa)		Primary Reinforcement Stress (MPa)				
		Calculated	Allowable	Calculated				Allowable
				Direction 1		Direction 2		
				In/Top	Out/Bottom	In/Top	Out/Bottom	
18 Wall	6	-11.6	-29.3	37.8	57.6	-17.6	-64.0	372.2
Below RCCV	13	-13.1	-29.3	24.3	40.2	-18.1	-70.5	372.2
Bottom	24	-12.5	-29.3	20.3	50.6	-19.8	-69.2	372.2
19 Wall Below	806	-8.5	-29.3	96.4	47.3	54.7	-54.1	372.2
Below RCCV	813	-9.7	-29.3	61.3	46.4	-34.0	-57.6	372.2
Mid-Height	824	-10.5	-29.3	82.1	45.6	74.1	-60.9	372.2
20 Wall	1606	-13.4	-29.3	107.1	134.1	-85.0	95.2	372.2
Below RCCV	1613	-16.2	-29.3	76.8	111.6	-98.5	61.3	372.2
Top	1624	-16.7	-29.3	104.2	134.0	-103.6	101.6	372.2
21 Exterior Wall	20011	-8.2	-29.3	116.6	40.7	65.7	104.4	372.2
@ EL-11.50	20023	-6.2	-28.9	11.6	-19.4	20.8	-25.1	368.9
~10.50m	30010	-5.6	-29.3	58.2	48.0	38.5	76.7	372.2
	30020	-4.2	-29.3	-12.0	11.1	-7.5	-18.0	372.2
	40001	-4.3	-29.3	18.0	11.1	-6.8	-17.8	372.2
	40011	-5.9	-29.3	43.2	47.8	31.6	91.4	372.2
22 Exterior Wall	22011	-7.0	-29.3	246.0	202.2	235.8	303.4	372.2
@ EL4.65	22023	-8.7	-29.3	131.6	56.8	85.0	54.4	372.2
~6.60m	32010	-4.6	-29.3	186.7	231.6	135.2	221.2	372.2
	32020	-5.3	-29.3	56.2	122.7	198.5	280.1	372.2
	42001	-7.4	-29.3	102.2	85.9	206.6	216.1	372.2
	42011	-6.3	-29.3	124.3	160.9	196.0	163.9	372.2
23 Exterior Wall	24211	-5.7	-29.3	244.4	148.0	259.4	123.7	372.2
@ EL22.50	24224	-10.2	-29.3	146.8	106.0	319.7	132.2	372.2
~24.60m	34210	-4.8	-29.3	191.9	237.1	106.8	232.9	372.2
	34220	-5.3	-29.3	133.5	21.5	146.4	139.7	372.2
	44201	-3.9	-29.3	185.3	57.8	193.6	194.8	372.2
24 Basemat	90140	-5.2	-23.5	115.0	3.2	4.8	-8.3	372.2
@ Wall	90182	-3.9	-23.5	23.0	32.9	87.2	39.5	372.2
Below RCCV	90111	-4.5	-23.5	24.6	37.0	74.5	27.4	372.2
25 Slab	93140	-13.1	-29.3	144.1	195.2	147.9	204.7	372.2
EL4.65m	93182	-21.4	-29.3	60.4	100.5	-89.1	108.2	372.2
@ RCCV	93111	-19.4	-29.3	-80.8	101.4	70.8	104.6	372.2
26 Slab	96144	-10.9	-29.3	211.9	245.0	256.7	266.9	372.2
EL17.5m	96186	-11.0	-29.3	130.2	187.1	-52.3	40.1	372.2
@ RCCV	96113	-16.4	-28.8	-110.3	63.4	115.2	151.9	368.2
27 Slab	98472	-9.7	-27.6	57.0	84.3	77.8	85.8	359.4
EL27.0m	98514	-9.8	-27.6	-21.9	34.9	-31.4	64.2	359.4
@ RCCV	98424	-9.3	-28.1	106.9	-73.3	175.0	64.4	363.0

Note: Negative value means compression.

Note *: Wall Below RCCV

Exterior Wall

Slab/MS Tunnel Slab

Pool Girder

MS Tunnel Wall

Basemat

Direction1: Hoop,

Direction1: Horizontal,

Direction1: N-S,

Direction1: Horizontal,

Direction1: Horizontal,

Direction1: Top; Radial, Bottom; N-S,

Direction2: Vertical

Direction2: Vertical

Direction2: E-W

Direction2: Vertical

Direction2: Vertical

Direction2: Top; Circumferential, Bottom; E-W

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 218

REV. 2

of 543

**Table 7.3.1.1-6 Rebar and Concrete Stresses of RB, LOCA After 6 minutes + SSE: Winter
– Load ID = 7441 (Site-Specific Seismic Load Combination RB-9b) (Continued)**

Location	Element ID	Concrete Stress (MPa)		Primary Reinforcement Stress (MPa)					
		Calculated	Allowable	Calculated				Allowable	
				Direction 1'		Direction 2'			
				In/Top	Out/Bottom	In/Top	Out/Bottom		
28 Pool Girder @ Storage Pool	123054	-7.1	-29.0	53.2	171.9	119.9	252.9	369.8	
	123154	-3.7	-29.0	76.1	161.8	84.3	114.3	369.8	
29 Pool Girder @ Cavity	123062	-13.3	-27.4	35.8	222.8	7.5	187.8	358.3	
	123162	-10.0	-27.4	59.2	271.6	9.0	158.0	358.3	
30 Pool Girder @ Fuel Pool	123067	-13.7	-27.4	3.8	103.3	-47.5	58.6	358.3	
	123167	-7.7	-27.4	21.0	136.4	9.6	111.1	358.3	
31 MS Tunnel Wall and Slab	150122	-12.8	-29.3	19.2	156.0	-26.7	187.4	372.2	
	96611	-8.7	-29.3	-2.3	21.2	-11.6	230.6	372.2	
	98614	-8.1	-29.3	4.1	11.2	-13.4	144.4	372.2	
32 IC/PCCS Pool Wall in NS Dir.	125051	-5.2	-25.4	-13.3	-11.0	-24.4	-16.3	343.4	
	125151	-6.7	-25.4	75.9	59.2	68.2	51.8	343.4	
	125055	-5.1	-25.4	-32.5	-30.2	7.1	21.4	343.4	
	125155	-5.0	-25.4	-33.3	-32.2	-2.5	2.1	343.4	

Note: Negative value means compression.

Note *: Wall Below RCCV

Exterior Wall

Slab/MS Tunnel Slab

Pool Girder

MS Tunnel Wall

Basemat

Direction1: Hoop,

Direction1: Horizontal,

Direction1: N-S,

Direction1: Horizontal,

Direction1: Horizontal,

Direction1: Top; Radial, Bottom; N-S,

Direction2: Vertical

Direction2: Vertical

Direction2: E-W

Direction2: Vertical

Direction2: Vertical

Direction2: Top; Circumferential, Bottom; E-W



Table 7.3.1.1-7 Maximum Stress Ratios for Flexure and Membrane Forces

Location	Element ID	Concrete		Primary Reinforcement							
		σ/σ_a	Load ID	Direction 1'				Direction 2'			
				In/Top		Out/Bottom		In/Top		Out/Bottom	
				σ/σ_a	Load ID	σ/σ_a	Load ID	σ/σ_a	Load ID	σ/σ_a	Load ID
18 Wall Below RCCV Bottom	6	0.433	7501	0.249	7721	0.182	7641	0.250	7851	0.203	7621
	13	0.518	7501	0.206	8081	0.157	7721	0.250	7851	0.250	7661
	24	0.568	7501	0.202	7992	0.172	7672	0.252	7642	0.241	7671
19 Wall Below RCCV Mid-Height	806	0.298	8514	0.284	8021	0.189	7673	0.209	7671	0.183	7651
	813	0.339	8514	0.177	9011	0.132	9011	0.120	7651	0.206	7651
	824	0.367	8514	0.223	7921	0.140	7651	0.200	7971	0.237	7651
20 Wall Below RCCV Top	1606	0.542	6241	0.383	7701	0.364	7471	0.380	7701	0.264	7971
	1613	0.625	6341	0.263	7651	0.302	7471	0.335	7701	0.210	8061
	1624	0.639	8507	0.378	7751	0.363	7471	0.380	7602	0.289	8001
21 Exterior Wall @ EL-11.50 ~10.50m	20011	0.338	7251	0.391	8514	0.298	7821	0.568	8514	0.314	7721
	20023	0.467	7492	0.214	7492	0.099	7491	0.228	7992	0.097	7492
	30010	0.302	7501	0.183	9014	0.196	7961	0.209	7961	0.213	7921
	30020	0.192	7211	0.048	8061	0.111	7261	0.061	7601	0.157	2511
	40001	0.284	7481	0.078	8001	0.170	7461	0.074	7481	0.209	2511
	40011	0.338	7501	0.122	7971	0.143	8011	0.176	7961	0.271	9011
22 Exterior Wall @ EL4.65 ~6.60m	22011	0.388	7561	0.728	8513	0.591	8513	0.723	7871	0.827	8511
	22023	0.391	8511	0.367	8001	0.345	7701	0.487	7601	0.526	7601
	32010	0.235	7131	0.552	7482	0.635	8514	0.525	7173	0.714	8511
	32020	0.257	7371	0.429	7431	0.375	9012	0.719	7831	0.802	7411
	42001	0.269	7201	0.385	7751	0.253	7991	0.698	9012	0.677	7113
	42011	0.260	7501	0.504	8511	0.518	8511	0.571	9014	0.616	8511
23 Exterior Wall @ EL22.50 ~24.60m	24211	0.336	7501	0.662	7461	0.571	8511	0.725	7461	0.630	8513
	24224	0.436	7961	0.699	7481	0.451	7601	0.878	7632	0.848	8512
	34210	0.231	5026	0.655	7482	0.909	7482	0.520	8514	0.854	7482
	34220	0.195	7482	0.491	8511	0.250	8512	0.484	7261	0.617	8511
	44201	0.230	8502	0.498	7441	0.312	7581	0.545	7461	0.571	7581

Note *: Wall Below RCCV Direction1 : Hoop, Direction2 : Vertical
 Exterior Wall Direction1 : Horizontal, Direction2 : Vertical
 Slab Direction1 : N-S, Direction2 : E-W
 Pool Girder Direction1 : Horizontal, Direction2 : Vertical
 MS Tunnel Wall Direction1 : Horizontal, Direction2 : Vertical
 MS Tunnel Slab Direction1 : N-S, Direction2 : E-W
 σ and σ_a are calculated and allowable stress.



Table 7.3.1.1-7 Maximum Stress Ratios for Flexure and Membrane Forces (Continued)

Location	Element ID	Concrete		Primary Reinforcement							
		σ/σ_a	Load ID	Direction 1'				Direction 2'			
				In/Top		Out/Bottom		In/Top		Out/Bottom	
				σ/σ_a	Load ID	σ/σ_a	Load ID	σ/σ_a	Load ID	σ/σ_a	Load ID
24 Basemat @ Wall Below RCCV	90140	0.500	7571	0.474	7671	0.383	7672	0.157	7172	0.250	2515
	90182	0.244	7491	0.100	7601	0.181	7921	0.254	9014	0.166	7491
	90111	0.237	7571	0.077	7672	0.141	7581	0.214	7841	0.150	7821
25 Slab EL4.65m @ RCCV	93140	0.478	8514	0.427	7811	0.524	7941	0.406	6421	0.554	8514
	93182	0.741	8514	0.205	6441	0.270	8511	0.257	7351	0.326	8514
	93111	0.689	8514	0.218	7602	0.320	8514	0.235	8507	0.283	8514
26 Slab EL17.5m @ RCCV	96144	0.412	8511	0.600	6971	0.705	8514	0.757	8508	0.773	8507
	96186	0.483	8513	0.442	7431	0.550	8511	0.256	7103	0.240	8511
	96113	0.588	8513	0.428	7102	0.365	7521	0.440	7103	0.442	8511
27 Slab EL27.0m @ RCCV	98472	0.890	8512	0.869	8512	0.518	8511	0.875	8512	0.514	8511
	98514	0.668	8513	0.402	8513	0.291	8511	0.313	8514	0.216	7331
	98424	0.844	8514	0.685	7501	0.436	7851	0.720	8514	0.404	8511
28 Pool Girder @ Storage Pool	123054	0.669	8512	0.327	8507	0.631	8501	0.531	7481	0.721	9011
	123154	0.455	8512	0.385	8514	0.724	8513	0.306	7431	0.385	8505
29 Pool Girder @ Cavity	123062	0.464	6971	0.295	8514	0.602	7421	0.298	7501	0.514	6421
	123162	0.365	7461	0.432	7131	0.735	7481	0.165	6142	0.486	6421
30 Pool Girder @ Fuel Pool	123067	0.888	8513	0.805	8506	0.554	6431	0.725	9005	0.512	6911
	123167	0.601	8505	0.772	9005	0.479	6445	0.676	8505	0.431	6431
31 MS Tunnel Wall and Slab	150122	0.517	2021	0.064	7501	0.491	2521	0.072	7421	0.709	7521
	96611	0.383	7521	0.155	7101	0.143	7521	0.155	7851	0.651	7521
	98614	0.284	7371	0.058	8514	0.120	7521	0.498	8511	0.480	7173
32 IC/PCCS Pool Wall in NS Dir.	125051	0.272	9005	0.544	8505	0.628	8512	0.748	8513	0.773	8512
	125151	0.292	9012	0.520	8513	0.609	8512	0.610	8505	0.605	8512
	125055	0.340	8512	0.380	8514	0.458	8512	0.408	8514	0.483	8512
	125155	0.287	9003	0.377	8514	0.473	8512	0.276	8514	0.310	8512

Note *: Wall Below RCCV Direction1 : Hoop, Direction2 : Vertical
 Exterior Wall Direction1 : Horizontal, Direction2 : Vertical
 Slab Direction1 : N-S, Direction2 : E-W
 Pool Girder Direction1 : Horizontal, Direction2 : Vertical
 MS Tunnel Wall Direction1 : Horizontal, Direction2 : Vertical
 MS Tunnel Slab Direction1 : N-S, Direction2 : E-W
 σ and σ_a are calculated and allowable stress.



Table 7.3.1.2-1 Membrane Compressive Forces of RB

Location	Element ID	Load ID	Section Forces (MN/m)			Thickness h (m)	Calculated Concrete Stress (MPa)				Allowable Stress σ_a (MPa)	σ_c/σ_a
			N_x	N_y	N_{xy}		σ_x	σ_y	τ_{xy}	σ_c		
18 Wall Below RCCV Bottom	6	2001	-1.563	-8.189	-0.217	2.0	-0.782	-4.095	-0.109	-4.098	-10.4	0.396
	13	2001	-1.451	-6.579	0.270	2.0	-0.726	-3.290	0.135	-3.297	-10.4	0.319
	24	2001	-1.218	-7.262	-0.348	2.0	-0.609	-3.631	-0.174	-3.641	-10.4	0.352
19 Wall Below RCCV Mid-Height	806	2001	-1.288	-7.032	-0.299	2.0	-0.644	-3.516	-0.150	-3.524	-10.4	0.340
	813	8514	-2.711	-16.363	-1.177	2.0	-1.356	-8.182	-0.589	-8.232	-25.9	0.318
	824	2001	-1.949	-7.215	-0.307	2.0	-0.975	-3.607	-0.154	-3.616	-10.4	0.349
20 Wall Below RCCV Top	1606	2001	-1.332	-6.426	0.251	2.0	-0.666	-3.213	0.125	-3.219	-10.4	0.311
	1613	8514	3.797	-16.590	2.179	2.0	1.899	-8.295	1.089	-8.410	-25.9	0.325
	1624	8514	4.784	-17.402	-2.777	2.0	2.392	-8.701	-1.389	-8.872	-25.9	0.343
21 Exterior Wall @ EL-11.50 ~10.50m	20011	7501	-4.083	-7.207	-2.927	2.0	-2.042	-3.604	-1.463	-4.482	-20.7	0.217
	20023	7491	-6.833	-6.195	3.372	2.0	-3.417	-3.098	1.686	-4.951	-25.9	0.191
	30010	7561	-4.398	-4.341	-1.189	2.0	-2.199	-2.171	-0.594	-2.779	-20.7	0.134
	30020	8511	-1.819	-5.030	-2.079	2.0	-0.909	-2.515	-1.040	-3.026	-25.9	0.117
	40001	7251	-1.549	-3.724	1.731	2.0	-0.774	-1.862	0.866	-2.340	-20.7	0.113
	40011	2001	-1.512	-3.352	-0.161	2.0	-0.756	-1.676	-0.081	-1.683	-10.4	0.163
	22011	7501	-1.371	-8.634	4.792	1.5	-0.914	-5.756	3.195	-7.343	-20.7	0.355
22 Exterior Wall @ EL4.65 ~6.60m	22023	7492	-0.844	-12.174	-6.207	1.5	-0.563	-8.116	-4.138	-9.942	-25.9	0.384
	32010	7501	-1.492	-5.565	3.134	1.5	-0.995	-3.710	2.090	-4.845	-20.7	0.234
	32020	7251	-0.538	-8.214	2.536	1.5	-0.358	-5.476	1.690	-5.984	-20.7	0.289
	42001	7251	-0.399	-8.353	2.597	1.5	-0.266	-5.569	1.731	-6.084	-20.7	0.294
	42011	7501	-1.665	-6.683	-3.737	1.5	-1.110	-4.455	-2.491	-5.783	-20.7	0.279
	24211	7561	-1.136	-6.516	3.804	1.5	-0.757	-4.344	2.536	-5.657	-20.7	0.273
	24224	7301	-0.534	-10.393	3.951	1.5	-0.356	-6.929	2.634	-7.854	-20.7	0.379
23 Exterior Wall @ EL22.50 ~24.60m	34210	7561	-1.067	-2.848	3.519	1.5	-0.712	-1.899	2.346	-3.725	-20.7	0.180
	34220	7351	0.222	-4.563	-2.222	1.5	0.148	-3.042	-1.481	-3.624	-20.7	0.175
	44201	7251	0.193	-5.099	-2.604	1.5	0.128	-3.399	-1.736	-4.110	-20.7	0.199
	90140	7151	-6.079	-3.769	2.214	4.0	-1.520	-0.942	0.554	-1.855	-16.6	0.112
24 Basemat @ Wall Below RCCV	90182	2001	-3.496	-2.684	-0.125	4.0	-0.874	-0.671	-0.031	-0.879	-8.3	0.106
	90111	2001	-4.049	-3.155	0.037	4.0	-1.012	-0.789	0.009	-1.013	-8.3	0.122
25 Slab EL4.65m @ RCCV	93140	8514	-2.967	0.452	3.622	1.0	-2.967	0.452	3.622	-5.263	-25.9	0.203
	93182	8511	1.567	-4.979	-0.427	1.0	1.567	-4.979	-0.427	-5.007	-25.9	0.193
	93111	7421	-4.428	1.759	-0.287	1.0	-4.428	1.759	-0.287	-4.441	-25.9	0.172
26 Slab EL17.5m @ RCCV	96144	8508	0.111	0.762	4.690	1.0	0.111	0.762	4.690	-4.265	-25.9	0.165
	96186	8514	2.343	-6.951	-2.172	1.0	2.343	-6.951	-2.172	-7.434	-25.9	0.287
	96113	6483	-9.995	2.744	-1.583	1.6	-6.247	1.715	-0.989	-6.368	-25.9	0.246
27 Slab EL27.0m @ RCCV	98472	8513	-10.808	-6.087	12.587	1.5	-7.205	-4.058	8.391	-14.169	-25.9	0.548
	98514	8511	4.015	-5.431	-2.348	1.5	2.676	-3.621	-1.566	-3.989	-25.9	0.154
	98424	8512	-29.098	2.108	-5.888	2.4	-12.124	0.878	-2.453	-12.572	-25.9	0.486
28 Pool Girder @ Storage Pool	123054	8512	-1.321	-15.008	2.545	1.6	-0.826	-9.380	1.591	-9.666	-25.9	0.374
	123154	8512	-2.825	-5.733	4.099	1.6	-1.766	-3.583	2.562	-5.393	-25.9	0.208
29 Pool Girder @ Cavity	123062	8513	-3.715	-9.482	-1.757	1.6	-2.322	-5.926	-1.098	-6.235	-25.9	0.241
	123162	8513	-3.415	-7.503	-4.804	1.6	-2.134	-4.689	-3.002	-6.674	-25.9	0.258
30 Pool Girder @ Fuel Pool	123067	8511	-4.292	-11.854	-6.899	1.6	-2.683	-7.409	-4.312	-9.962	-25.9	0.385
	123167	8511	-3.818	-5.177	-6.491	1.6	-2.386	-3.236	-4.057	-6.890	-25.9	0.266
31 MS Tunnel Wall and Slab	150122	2021	-0.027	-0.558	1.494	1.3	-0.021	-0.429	1.150	-1.393	-15.5	0.090
	96611	8511	-0.742	2.325	-0.083	1.6	-0.464	1.453	-0.052	-0.465	-25.9	0.018
	98614	8512	-1.805	2.572	-0.676	2.4	-0.752	1.072	-0.282	-0.795	-25.9	0.031
32 IC/PCCS Pool Wall in NS Dir.	125051	7501	-0.260	-2.951	-2.191	1.0	-0.260	-2.951	-2.191	-4.177	-20.7	0.202
	125151	7441	-2.048	-2.214	3.305	1.0	-2.048	-2.214	3.305	-5.437	-25.9	0.210
	125055	8513	-5.767	-0.210	-0.799	1.0	-5.767	-0.210	-0.799	-5.879	-25.9	0.227
	125155	8513	-6.767	-0.414	-0.774	1.0	-6.767	-0.414	-0.774	-6.860	-25.9	0.265

Note: Positive value means tension.

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 222

REV. 2

of 543

Table 7.3.1.3-1 Transverse Shear of RB

Location	Element ID	Load ID	d (m)	p _v (%)	Shear Force (MN/m)				V _u /φV _n
					V _u	V _c	V _s	φV _n	
18 Wall Below RCCV Bottom	6	7461	1.62	0.721	2.16	4.96	4.84	8.33	0.259
	13	7461	1.62	0.721	2.24	4.82	4.84	8.21	0.273
	24	7501	1.59	0.721	2.30	4.63	4.73	7.95	0.289
19 Wall Below Below RCCV Mid-Height	806	7992	1.57	0.270	0.12	0.15	1.75	1.61	0.077
	813	8514	1.57	0.270	0.91	4.86	1.75	5.62	0.162
	824	8514	1.57	0.270	1.02	5.00	1.75	5.74	0.177
20 Wall Below RCCV Top	1606	6421	1.57	0.540	4.05	4.00	3.50	6.37	0.635
	1613	6471	1.57	0.540	4.68	4.24	3.50	6.57	0.712
	1624	8507	1.57	0.540	5.07	4.37	3.50	6.69	0.759
21 Exterior Wall @ EL-11.50 ~10.50m	20011	8512	1.63	0.484	1.87	0.64	3.27	3.32	0.562
	20023	8514	1.58	0.484	1.46	1.85	3.15	4.25	0.342
	30010	7511	1.68	0.710	1.63	2.33	4.93	6.17	0.265
	30020	7511	1.69	0.710	1.20	3.52	4.96	7.21	0.166
	40001	7571	1.70	0.710	1.44	2.08	4.98	6.00	0.239
	40011	7501	1.69	0.710	2.46	3.91	4.97	7.55	0.325
22 Exterior Wall @ EL4.65 ~6.60m	22011	8514	1.15	0.484	1.00	0.00	2.31	1.96	0.513
	22023	9014	1.16	0.484	0.71	1.10	2.33	2.92	0.242
	32010	8514	1.09	0.177	0.36	0.00	0.80	0.68	0.524
	32020	6435	1.25	0.177	0.25	0.29	0.91	1.02	0.242
	42001	7411	1.25	0.242	0.84	0.85	1.25	1.79	0.468
	42011	7711	1.09	0.242	0.29	0.27	1.09	1.16	0.252
23 Exterior Wall @ EL22.50 ~24.60m	24211	8511	1.09	0.968	2.78	0.00	4.25	3.61	0.771
	24224	7211	1.10	0.484	1.79	0.00	2.21	1.88	0.954
	34210	8512	1.09	0.177	0.52	0.00	0.80	0.68	0.761
	34220	8503	1.26	0.710	1.21	0.94	3.69	3.93	0.308
	44201	4021	1.26	0.968	2.40	0.95	4.89	4.96	0.483
24 Basemat @ Wall Below RCCV	90140	7571	3.53	0.801	6.36	4.46	11.69	13.73	0.463
	90182	7331	3.51	0.801	5.34	5.96	11.63	14.95	0.357
	90111	8514	3.55	0.801	5.12	6.17	11.76	15.24	0.336
25 Slab EL4.65m @ RCCV	93140	8514	0.80	0.500	0.30	0.22	1.65	1.59	0.192
	93182	8514	0.80	0.500	2.30	1.36	1.65	2.56	0.899
	93111	8514	0.80	0.500	1.97	1.24	1.65	2.46	0.800
26 Slab EL17.5m @ RCCV	96144	7103	0.80	0.500	0.32	0.82	1.65	2.10	0.153
	96186	8511	0.80	0.500	1.41	2.18	1.65	3.25	0.432
	96113	7492	1.34	0.500	1.75	1.59	2.76	3.69	0.474
27 Slab EL27.0m @ RCCV	98472	8513	1.21	0.968	3.50	4.56	4.73	7.90	0.443
	98514	8514	1.21	0.968	3.49	1.88	4.72	5.61	0.623
	98424	8512	1.95	0.968	10.86	7.00	7.62	12.42	0.874
28 Pool Girder @ Storage Pool	123054	9011	1.25	0.484	1.25	1.35	2.50	3.28	0.382
	123154	8503	1.25	0.484	0.94	1.40	2.50	3.32	0.284
29 Pool Girder @ Cavity	123062	7361	1.25	0.242	0.43	1.30	1.25	2.17	0.200
	123162	7331	1.23	0.242	0.30	0.33	1.23	1.32	0.224
30 Pool Girder @ Fuel Pool	123067	7441	1.28	0.484	1.02	4.00	2.57	5.58	0.182
	123167	8513	1.24	0.484	0.75	0.98	2.48	2.94	0.254
31 MS Tunnel Wall and Slab	150122	8512	1.06	0.177	0.53	0.73	0.78	1.28	0.416
	96611	8514	1.34	0.500	0.62	1.65	2.76	3.75	0.166
	98614	8511	1.95	0.500	1.44	3.51	4.04	6.41	0.224
32 IC/PCCS Pool Wall in NS Direction	125051	8512	0.81	0.250	0.28	0.82	0.83	1.41	0.201
	125151	8513	0.82	0.250	0.24	0.49	0.85	1.13	0.209
	125055	8514	0.80	0.250	0.34	0.65	0.83	1.25	0.275
	125155	8512	0.79	0.250	0.29	0.71	0.82	1.30	0.221



Table 7.3.1.3-2 Transverse Shear of RB for DCD Load Combinations

Location	Element ID	Load ID	Load ID	d (m)	p _v (%)	Shear Force (MN/m)				V _u /φV _n
						V _u	V _c	V _s	φV _n	
18 Wall Below RCCV Bottom	6	7741	RB-9a	1.59	0.721	1.08	1.35	4.73	5.17	0.209
	13	7741	RB-9a	1.59	0.721	1.34	1.97	4.73	5.70	0.235
	24	7941	RB-9b	1.59	0.721	1.13	2.35	4.73	6.02	0.187
19 Wall Below Below RCCV Mid-Height	806	7441	RB-9b	1.57	0.270	0.32	4.56	1.75	5.37	0.060
	813	7441	RB-9b	1.57	0.270	0.82	4.85	1.75	5.62	0.146
	824	7441	RB-9b	1.57	0.270	0.87	4.91	1.75	5.66	0.153
20 Wall Below RCCV Top	1606	6441	RB-8b	1.57	0.540	4.04	4.02	3.50	6.39	0.632
	1613	6441	RB-8b	1.57	0.540	4.68	4.26	3.50	6.59	0.710
	1624	6441	RB-8b	1.57	0.540	4.95	4.28	3.50	6.61	0.749
21 Exterior Wall @ EL-11.50 ~-10.50m	20011	7441	RB-9b	1.63	0.484	1.79	2.74	3.27	5.11	0.351
	20023	7441	RB-9b	1.58	0.484	1.31	3.15	3.16	5.37	0.243
	30010	7241	RB-9a	1.69	0.710	1.37	2.78	4.97	6.59	0.208
	30020	7241	RB-9a	1.71	0.710	0.76	3.16	5.02	6.95	0.109
	40001	7241	RB-9a	1.71	0.710	0.89	3.29	5.01	7.05	0.126
	40011	7241	RB-9a	1.69	0.710	1.81	3.50	4.97	7.20	0.252
22 Exterior Wall @ EL4.65 ~-6.60m	22011	7441	RB-9b	1.15	0.484	0.93	0.00	2.31	1.96	0.475
	22023	7241	RB-9a	1.18	0.484	0.73	3.55	2.36	5.02	0.146
	32010	7241	RB-9a	1.09	0.177	0.29	0.05	0.80	0.72	0.401
	32020	7941	RB-9b	1.26	0.177	0.25	0.29	0.92	1.03	0.239
	42001	7241	RB-9a	1.19	0.242	0.52	0.80	1.19	1.69	0.310
	42011	7941	RB-9b	1.09	0.242	0.20	0.23	1.09	1.13	0.177
23 Exterior Wall @ EL22.50 ~-24.60m	24211	7241	RB-9a	1.05	0.968	1.34	0.06	4.10	3.53	0.379
	24224	7941	RB-9b	1.05	0.484	1.21	0.00	2.11	1.79	0.677
	34210	7241	RB-9a	1.09	0.177	0.27	0.57	0.80	1.16	0.234
	34220	4021	RB-4	1.26	0.710	0.46	1.11	3.69	4.08	0.113
	44201	4021	RB-4	1.26	0.968	2.40	0.95	4.89	4.96	0.483
	90140	7441	RB-9b	3.53	0.801	6.34	6.75	11.70	15.69	0.404
24 Basemat @ Wall Below RCCV	90182	7441	RB-9b	3.51	0.801	5.22	5.88	11.63	14.88	0.351
	90111	7441	RB-9b	3.55	0.801	4.42	6.25	11.76	15.31	0.289
	93140	7441	RB-9b	0.80	0.500	0.29	0.17	1.65	1.55	0.188
25 Slab EL4.65m @ RCCV	93182	7441	RB-9b	0.80	0.500	2.25	1.60	1.65	2.76	0.815
	93111	7441	RB-9b	0.80	0.500	1.86	1.45	1.65	2.63	0.707
	96144	7441	RB-9b	0.80	0.500	0.32	1.91	1.65	3.03	0.105
26 Slab EL17.5m @ RCCV	96186	7441	RB-9b	0.80	0.500	1.03	2.13	1.65	3.21	0.319
	96113	7241	RB-9a	1.34	0.500	2.29	3.65	2.76	5.45	0.420
	98472	7441	RB-9b	1.21	0.968	2.03	3.30	4.73	6.83	0.297
27 Slab EL27.0m @ RCCV	98514	7441	RB-9b	1.21	0.968	1.21	1.63	4.73	5.41	0.223
	98424	7441	RB-9b	1.95	0.968	8.30	4.91	7.62	10.65	0.779
	123054	4021	RB-4	1.25	0.484	0.71	3.00	2.50	4.68	0.151
28 Pool Girder @ Storage Pool	123154	7441	RB-9b	1.25	0.484	0.25	0.30	2.50	2.38	0.107
29 Pool Girder @ Cavity	123062	7241	RB-9a	1.24	0.242	0.41	2.60	1.25	3.27	0.127
	123162	7441	RB-9b	1.21	0.242	0.19	0.22	1.21	1.22	0.154
30 Pool Girder @ Fuel Pool	123067	7441	RB-9b	1.28	0.484	1.02	4.00	2.57	5.58	0.182
	123167	7441	RB-9b	1.28	0.484	0.72	1.05	2.56	3.07	0.234
31 MS Tunnel Wall and Slab	150122	7441	RB-9b	1.04	0.177	0.55	1.10	0.76	1.58	0.351
	96611	7241	RB-9a	1.34	0.500	0.50	1.66	2.76	3.75	0.134
	98614	7241	RB-9a	2.14	0.500	0.57	2.34	4.42	5.74	0.100
32 IC/PCCS Pool Wall in NS Direction	125051	7741	RB-9a	0.79	0.250	0.06	0.07	0.81	0.75	0.075
	125151	7441	RB-9b	0.79	0.250	0.10	0.12	0.82	0.80	0.130
	125055	7741	RB-9a	0.80	0.250	0.08	0.09	0.83	0.78	0.100
	125155	7441	RB-9b	0.81	0.250	0.23	2.01	0.83	2.42	0.096

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 224

REV. 2 of 543

Table 7.3.2-1 Maximum Stress Ratio of Truss Girder and Column

Member Name : TRUSS R4 upper											
Section ID : 4			Section Type : H			CBAR ID : 602201					
Flange PL : 600 x 66			Web PL : 468 x 50			i - edge					
Maximum Ratio		Load ID	Design Load (MN,MNm)			Stress (MPa)			Allowable Stress (MPa)		
			P	M	V	f_{ac}, f_{at}	f_{bc}, f_{bt}	f_v	F_{ac}, F_{at}	F_{bc}, F_{bt}	F_v
$f_{ac}/F_{ac}+f_{bc}/F_{bc}$	0.451	5002	-3.67	-2.06		-35.7	-101.2		290.8	364.0	
$f_{at}/F_{at}+f_{bt}/F_{bt}$	0.309	5003	0.88	-2.09		8.5	-103.0		330.9	364.0	
f_v/F_v	0.088	8113			-0.51			-17.1			193.1

Member Name : TRUSS R4 upper											
Section ID : 4			Section Type : H			CBAR ID : 602206					
Flange PL : 600 x 66			Web PL : 468 x 50			j - edge					
Maximum Ratio		Load ID	Design Load (MN,MNm)			Stress (MPa)			Allowable Stress (MPa)		
			P	M	V	f_{ac}, f_{at}	f_{bc}, f_{bt}	f_v	F_{ac}, F_{at}	F_{bc}, F_{bt}	F_v
$f_{ac}/F_{ac}+f_{bc}/F_{bc}$	0.394	8127	-6.01	0.87		-58.5	42.8		311.8	386.8	
$f_{at}/F_{at}+f_{bt}/F_{bt}$	0.048	8625	0.55	-0.26		5.3	-12.8		351.6	386.8	
f_v/F_v	0.005	8113			0.03			0.9			193.1

Member Name : TRUSS R4 lower											
Section ID : 4			Section Type : H			CBAR ID : 603201					
Flange PL : 600 x 66			Web PL : 468 x 50			i - edge					
Maximum Ratio		Load ID	Design Load (MN,MNm)			Stress (MPa)			Allowable Stress (MPa)		
			P	M	V	f_{ac}, f_{at}	f_{bc}, f_{bt}	f_v	F_{ac}, F_{at}	F_{bc}, F_{bt}	F_v
$f_{ac}/F_{ac}+f_{bc}/F_{bc}$	0.565	5002	-2.39	-3.04		-23.3	-149.6		262.2	330.9	
$f_{at}/F_{at}+f_{bt}/F_{bt}$	0.482	5001	0.84	-3.08		8.1	-151.3		330.9	330.9	
f_v/F_v	0.103	5001			-0.60			-19.9			193.1

Member Name : TRUSS R4 lower											
Section ID : 4			Section Type : H			CBAR ID : 603206					
Flange PL : 600 x 66			Web PL : 468 x 50			j - edge					
Maximum Ratio		Load ID	Design Load (MN,MNm)			Stress (MPa)			Allowable Stress (MPa)		
			P	M	V	f_{ac}, f_{at}	f_{bc}, f_{bt}	f_v	F_{ac}, F_{at}	F_{bc}, F_{bt}	F_v
$f_{ac}/F_{ac}+f_{bc}/F_{bc}$	0.353	8624	-6.80	-0.25		-66.3	-12.4		283.9	386.8	
$f_{at}/F_{at}+f_{bt}/F_{bt}$	0.679	5001	18.88	0.91		184.0	44.7		330.9	364.0	
f_v/F_v	0.006	5002			-0.03			-1.1			193.1

Member Name : TRUSS R4 diagonal											
Section ID : 1			Section Type : H			CBAR ID : 605201					
Flange PL : 600 x 32			Web PL : 536 x 32			i - edge					
Maximum Ratio		Load ID	Design Load (MN,MNm)			Stress (MPa)			Allowable Stress (MPa)		
			P	M	V	f_{ac}, f_{at}	f_{bc}, f_{bt}	f_v	F_{ac}, F_{at}	F_{bc}, F_{bt}	F_v
$f_{ac}/F_{ac}+f_{bc}/F_{bc}$	0.630	8114	-7.24	0.00		-130.4	0.0		295.5	385.3	
$f_{at}/F_{at}+f_{bt}/F_{bt}$	0.131	8625	2.57	0.00		46.2	0.0		351.6	385.3	
f_v/F_v	---	---			---			---			---

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 225

REV. 2

of 543

Table 7.3.2-1 Maximum Stress Ratio of Truss Girder and Column (Continued)

Member Name : TRUSS R4 diagonal											
Section ID : 3			Section Type : H			CBAR ID : 605206					
Flange PL : 400 x 25			Web PL : 350 x 25			j - edge					
Maximum Ratio		Load ID	Design Load (MN,MNm)			Stress (MPa)			Allowable Stress (MPa)		
			P	M	V	f_{ac}, f_{at}	f_{bc}, f_{bt}	f_v	F_{ac}, F_{at}	F_{bc}, F_{bt}	F_v
$f_{ac}/F_{ac}+f_{bc}/F_{bc}$	0.114	8624	-0.68	0.00		-23.6	0.0		272.5	351.6	
$f_{at}/F_{at}+f_{bt}/F_{bt}$	0.165	5001	1.57	0.00		54.5	0.0		330.9	330.9	
f_v/F_v	---	---			---			---			---

Member Name : TRUSS R4 post											
Section ID : 5			Section Type : 2L			CBAR ID : 604204					
Flange PL : 203 x 22			Web PL : 159 x 22			i - edge					
Maximum Ratio		Load ID	Design Load (MN,MNm)			Stress (MPa)			Allowable Stress (MPa)		
			P	M	V	f_{ac}, f_{at}	f_{bc}, f_{bt}	f_v	F_{ac}, F_{at}	F_{bc}, F_{bt}	F_v
$f_{ac}/F_{ac}+f_{bc}/F_{bc}$	0.655	8113	-2.29	0.00		-135.6	0.0		330.6	386.8	
$f_{at}/F_{at}+f_{bt}/F_{bt}$	0.166	8624	0.99	0.00		58.5	0.0		351.6	386.8	
f_v/F_v	---	---			---			---			---

Member Name : R4-RB column											
Section ID : 60			Section Type : H			CBAR ID : 600201					
Flange PL : 800 x 88			Web PL : 624 x 75			i - edge					
Maximum Ratio		Load ID	Design Load (MN,MNm)			Stress (MPa)			Allowable Stress (MPa)		
			P	M	V	f_{ac}, f_{at}	f_{bc}, f_{bt}	f_v	F_{ac}, F_{at}	F_{bc}, F_{bt}	F_v
$f_{ac}/F_{ac}+f_{bc}/F_{bc}$	0.623	8114	-19.61	2.02		-104.5	41.5		327.2	351.6	
$f_{at}/F_{at}+f_{bt}/F_{bt}$	0.058	8615	0.59	-0.84		3.2	-17.3		351.6	351.6	
f_v/F_v	0.025	8123			0.29			4.9			193.1

Member Name : R4-RB column											
Section ID : 6			Section Type : H			CBAR ID : 600209					
Flange PL : 800 x 88			Web PL : 624 x 50			j - edge					
Maximum Ratio		Load ID	Design Load (MN,MNm)			Stress (MPa)			Allowable Stress (MPa)		
			P	M	V	f_{ac}, f_{at}	f_{bc}, f_{bt}	f_v	F_{ac}, F_{at}	F_{bc}, F_{bt}	F_v
$f_{ac}/F_{ac}+f_{bc}/F_{bc}$	0.627	5002	-11.61	-4.71		-67.5	-99.3		306.9	330.9	
$f_{at}/F_{at}+f_{bt}/F_{bt}$	0.067	8625	0.81	0.90		4.7	19.0		351.6	351.6	
f_v/F_v	0.077	5002			0.60			14.9			193.1

Member Name : R4-RF column											
Section ID : 60			Section Type : H			CBAR ID : 601201					
Flange PL : 800 x 88			Web PL : 624 x 75			i - edge					
Maximum Ratio		Load ID	Design Load (MN,MNm)			Stress (MPa)			Allowable Stress (MPa)		
			P	M	V	f_{ac}, f_{at}	f_{bc}, f_{bt}	f_v	F_{ac}, F_{at}	F_{bc}, F_{bt}	F_v
$f_{ac}/F_{ac}+f_{bc}/F_{bc}$	0.895	8114	-26.63	-3.57		-142.0	-73.4		327.2	351.6	
$f_{at}/F_{at}+f_{bt}/F_{bt}$	0.101	5503	4.26	0.52		22.7	10.7		330.9	330.9	
f_v/F_v	0.067	8127			-0.78			-13.0			193.1



Figure 3.1-1 RB and FB Concrete Outline Plan at EL -11,500

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}




Figure 3.1-2 RB and FB Concrete Outline Plan at EL 4,650

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}




Figure 3.1-3 RB and FB Concrete Outline Plan at EL 17,500

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}




Figure 3.1-4 RB and FB Concrete Outline Plan at EL 27,000

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}




Figure 3.1-5 RB Concrete Outline Plan at EL 34,000

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}




Figure 3.1-6 RB and FB Concrete Outline N-S Section

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}




Figure 3.1-7 RB and FB Concrete Outline E-W Section
{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}

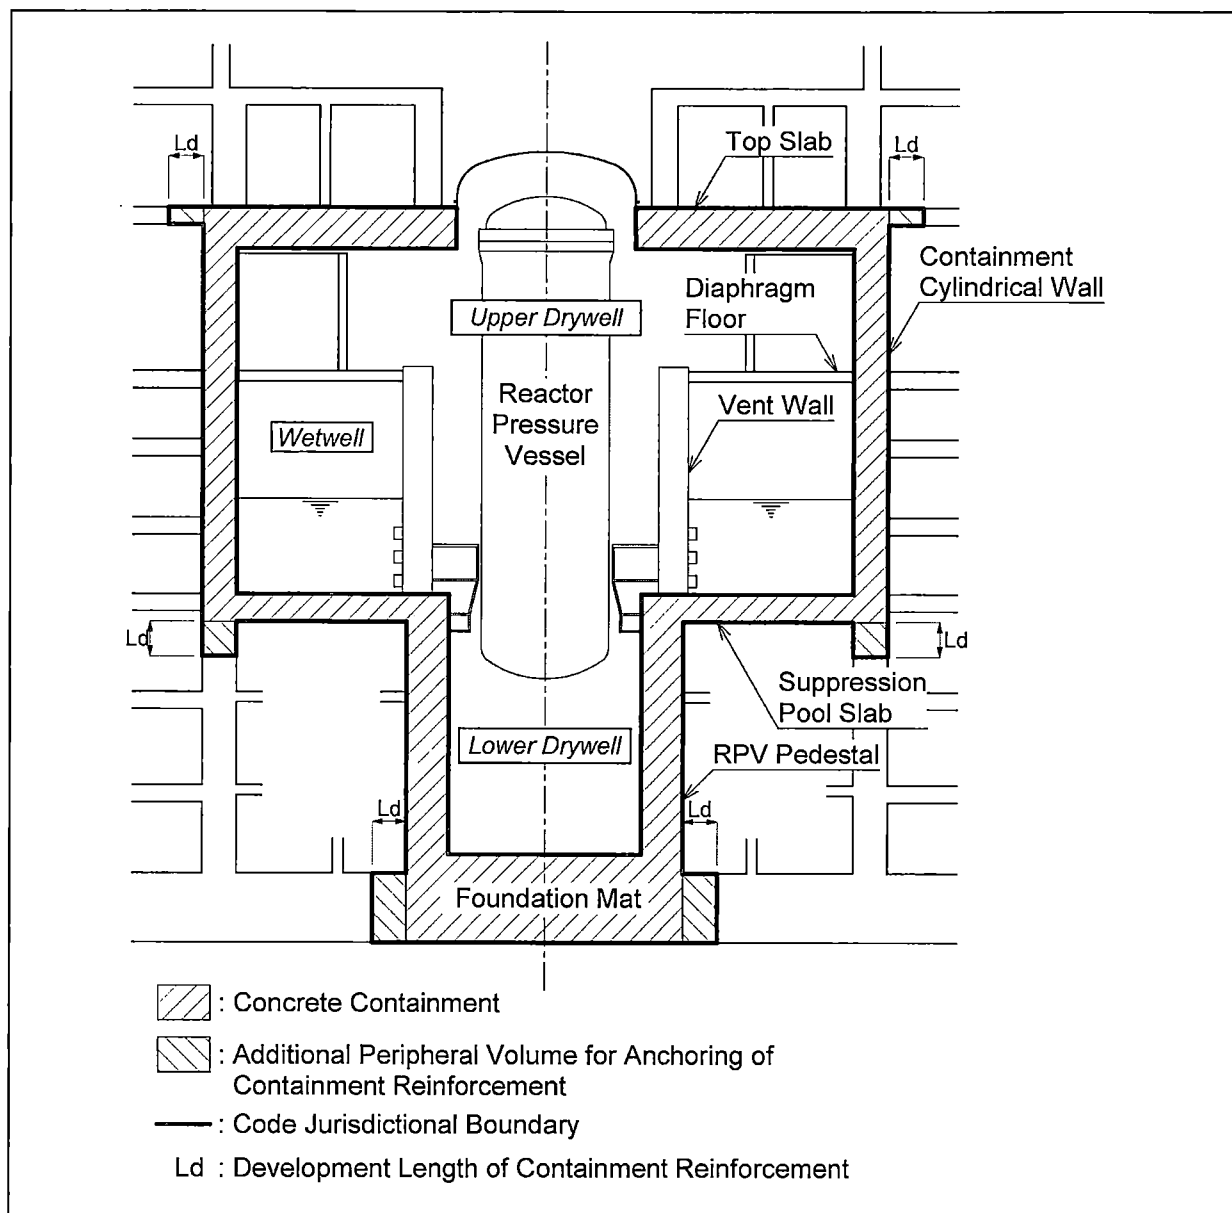


Figure 3.2-1 Configuration of RCCV



HITACHI

WG3-U71-ERD-S-0004

SH NO. 234

REV. 2

of 543

{

}

Figure 3.2-2 Locations of Various Pools in RB and FB

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004 SH NO. 235

REV. 2

of 543




Figure 5.1.1-1 Regions for Equipment Loads at EL -11,500

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004 SH NO. 236

REV. 2

of 543




Figure 5.1.1-2 Regions for Equipment Loads at EL -6,400

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004 SH NO. 237

REV. 2

of 543




Figure 5.1.1-3 Regions for Equipment Loads at EL -1,000

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004 SH NO. 238

REV. 2

of 543




Figure 5.1.1-4 Regions for Equipment Loads at EL 4,650

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}




Figure 5.1.1-5 Regions for Equipment Loads at EL 9,060



HITACHI

WG3-U71-ERD-S-0004 SH NO. 240

REV. 2

of 543




Figure 5.1.1-6 Regions for Equipment Loads at EL 13,570

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004 SH NO. 241

REV. 2

of 543




Figure 5.1.1-7 Regions for Equipment Loads at EL 22,500

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004 SH NO. 242

REV. 2 of 543




Figure 5.1.1-8 Regions for Equipment Loads at EL 27,000

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004 SH NO. 243

REV. 2

of 543




Figure 5.1.1-9 Regions for Equipment Loads at/above EL 34,000

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004 SH NO. 244

REV. 2

of 543

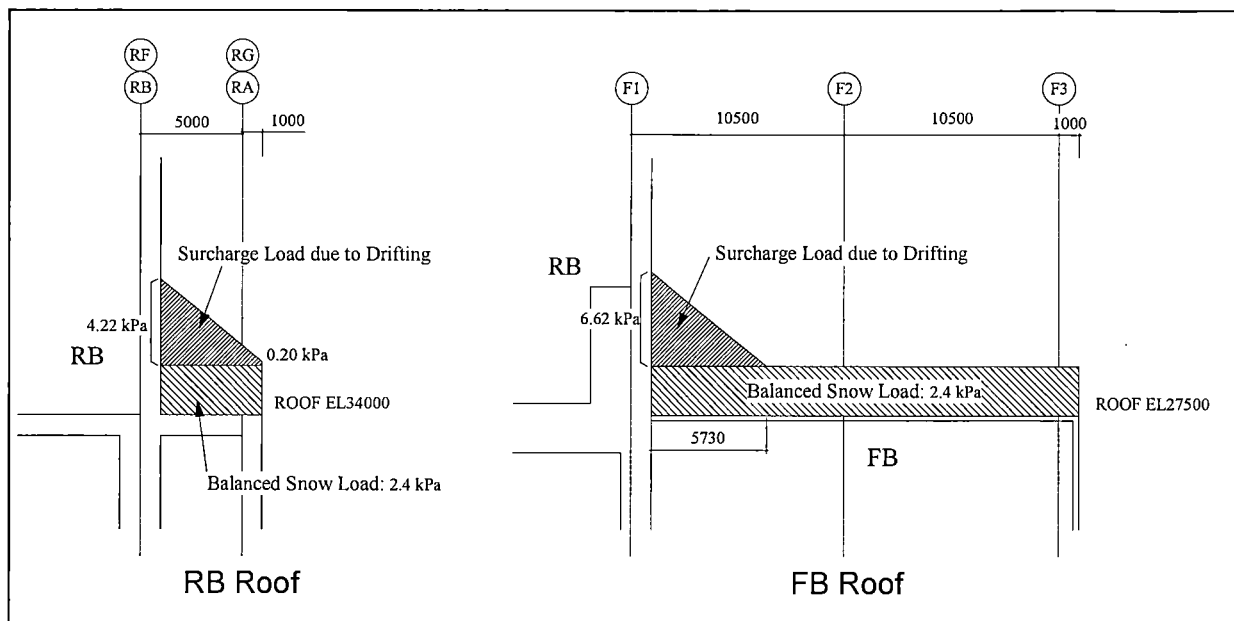


Figure 5.1.2-1 Snow Load

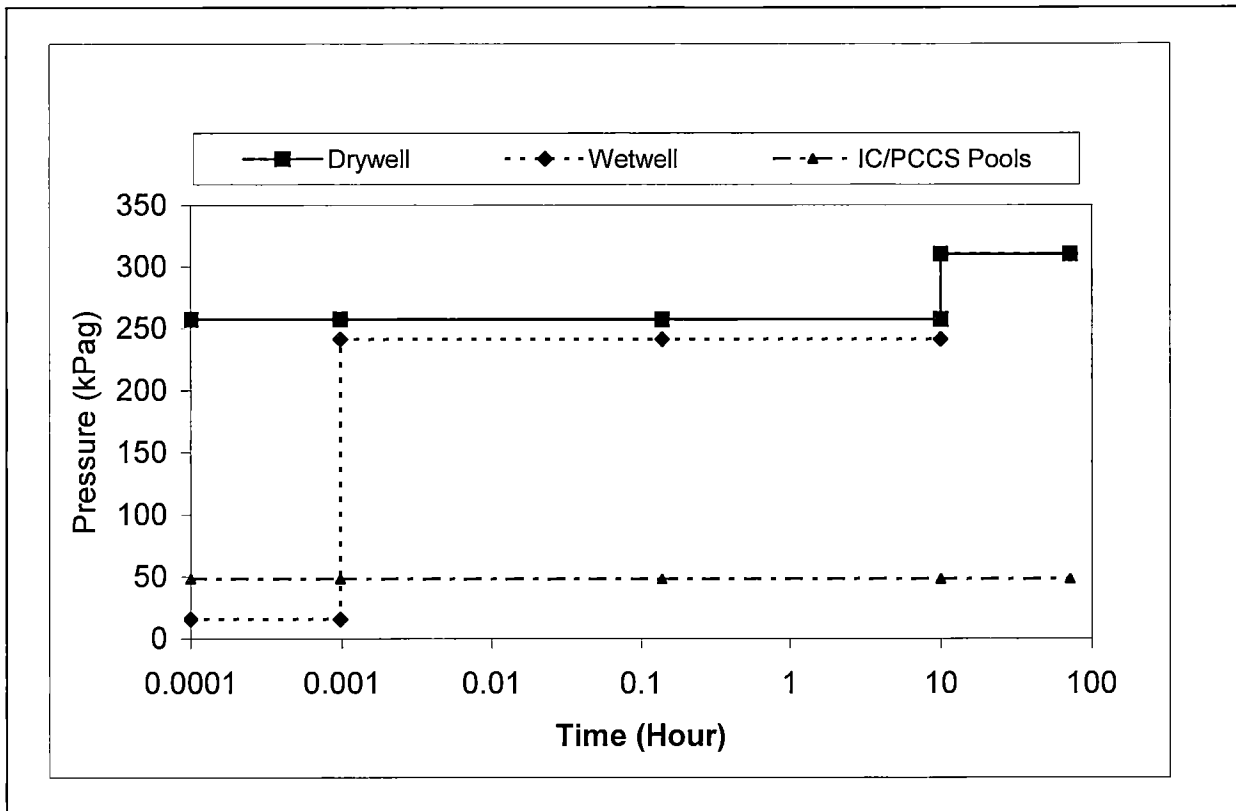


Figure 5.2.1-1 Envelopes of Transient Pressure Curves at DBA

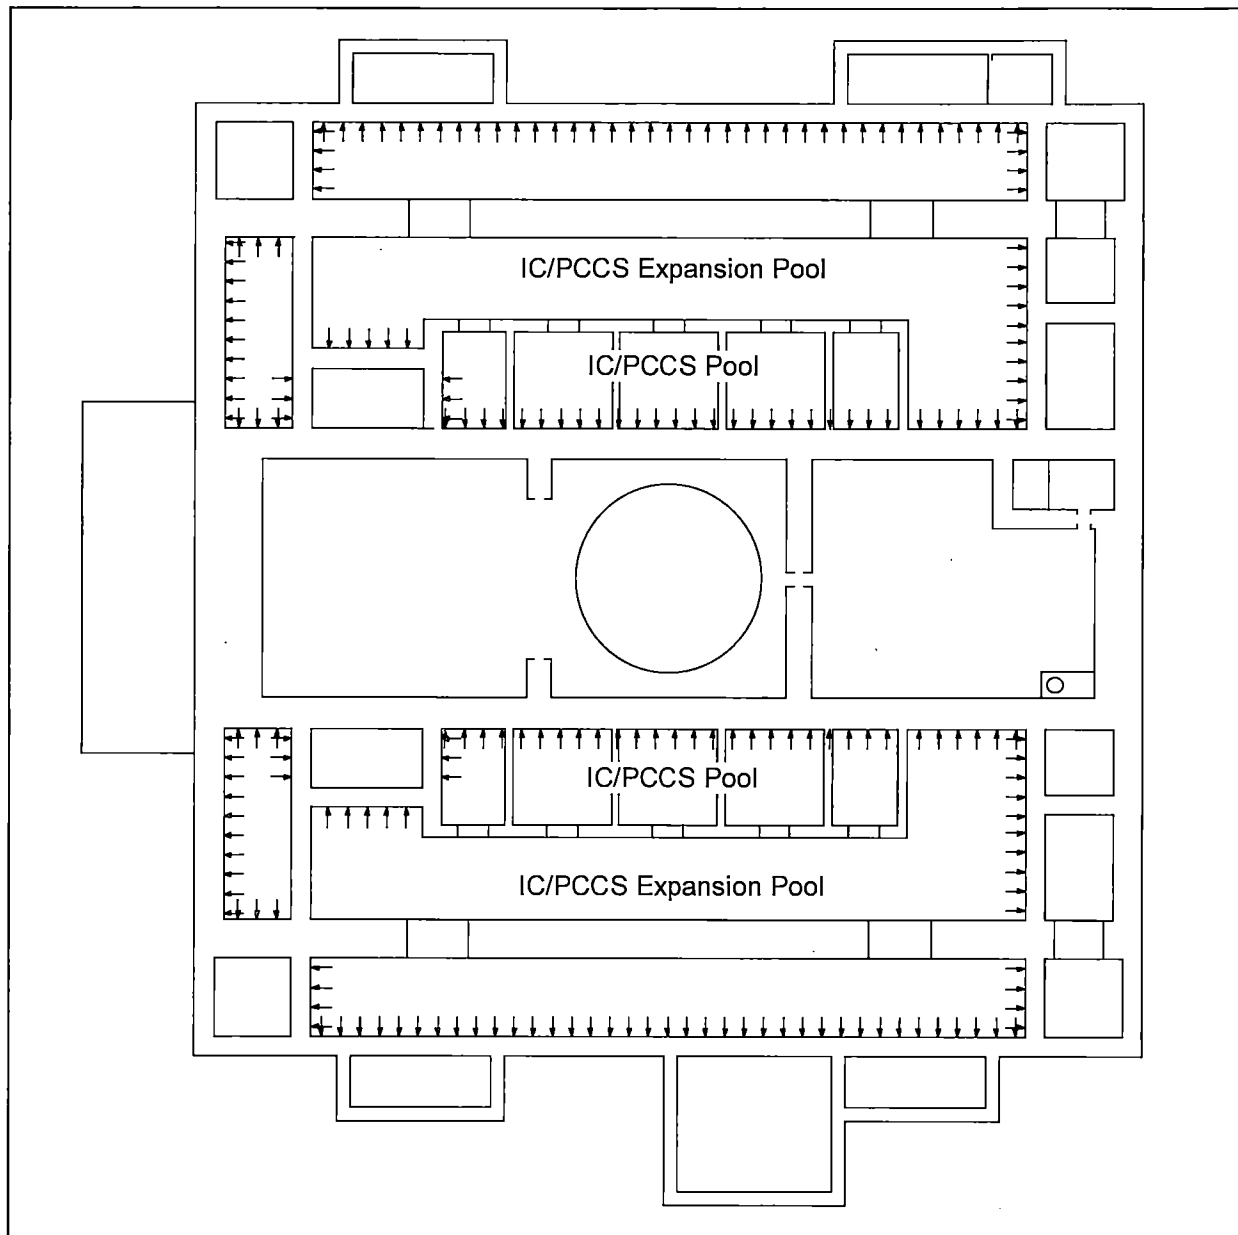


Figure 5.2.1-2 Regions Where Pressure Loads are Applied in IC/PCCS Pools


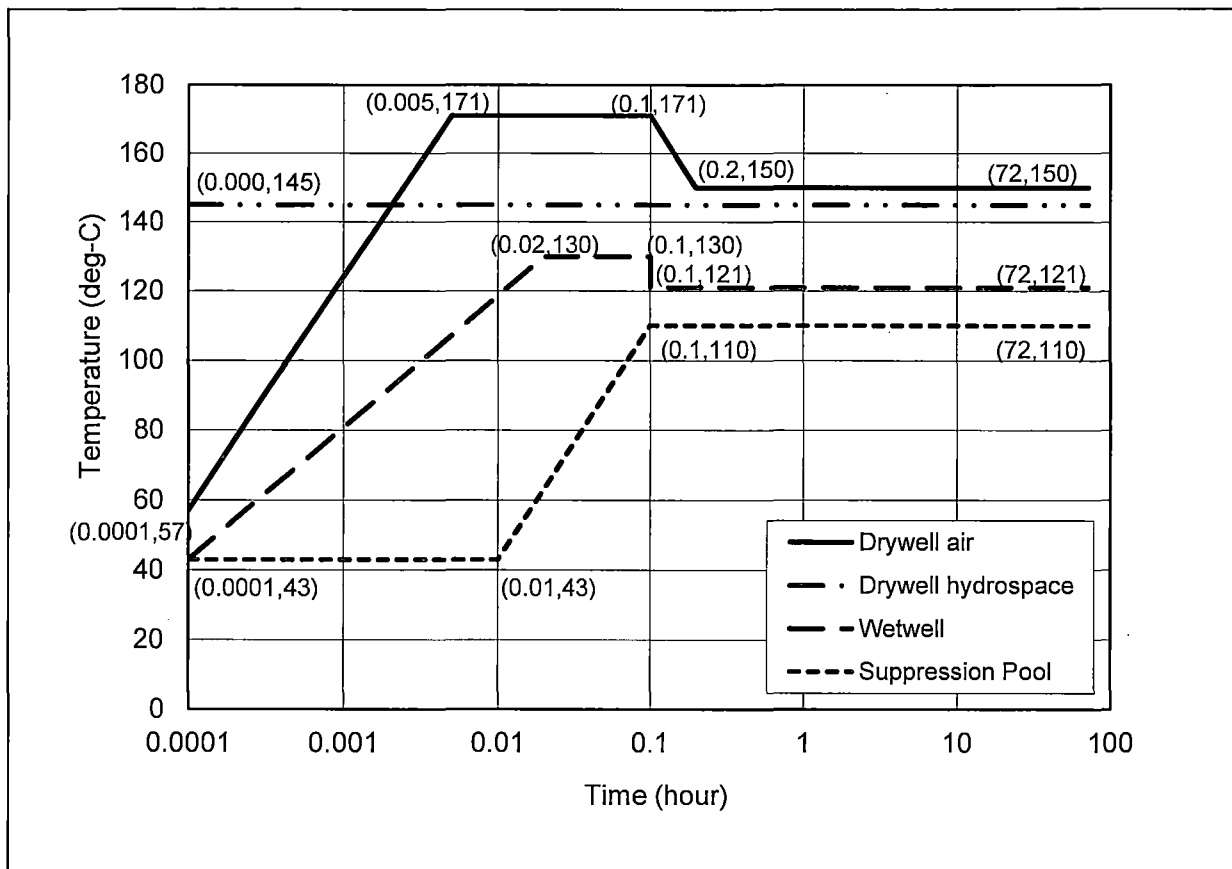


Figure 5.2.2-1 Envelopes of Transient Temperature Curves - Inside RCCV at DBA



Note: The structural evaluation for TRACG calculated LOCA temperature curves are described in Appendix E in Reference 2.1.2-e.

Figure 5.2.2-2 Envelopes of Transient Temperature Curves – Other Pools at DBA

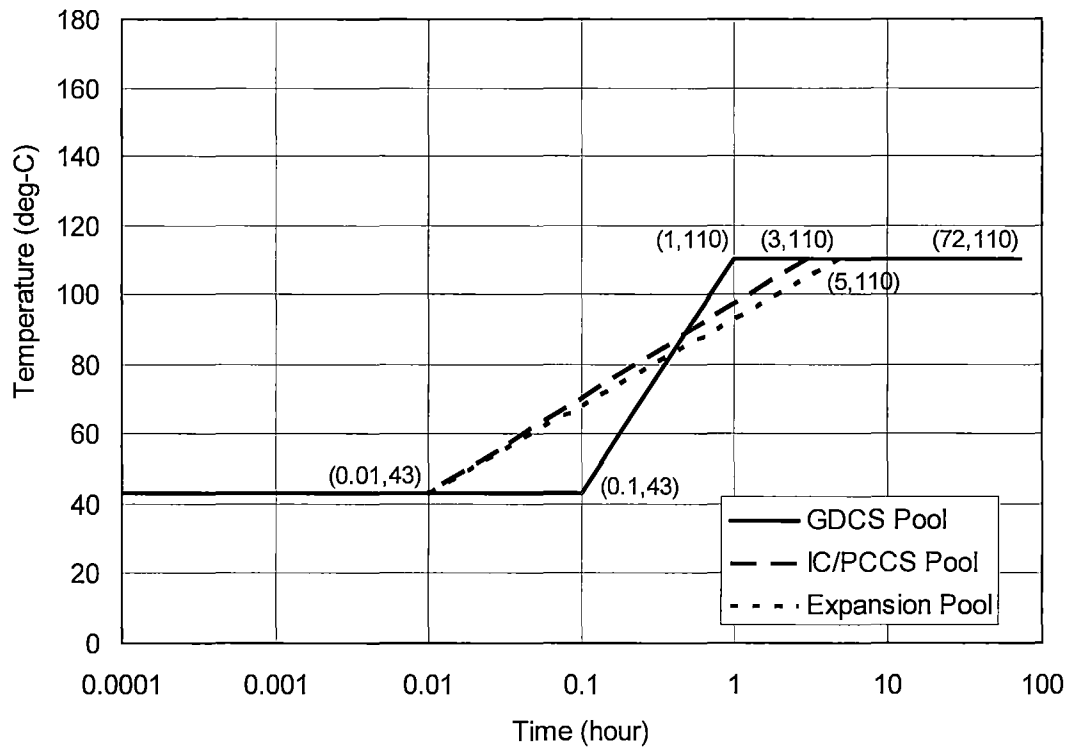

HITACHI

WG3-U71-ERD-S-0004 SH NO. 249

REV. 2

of 543

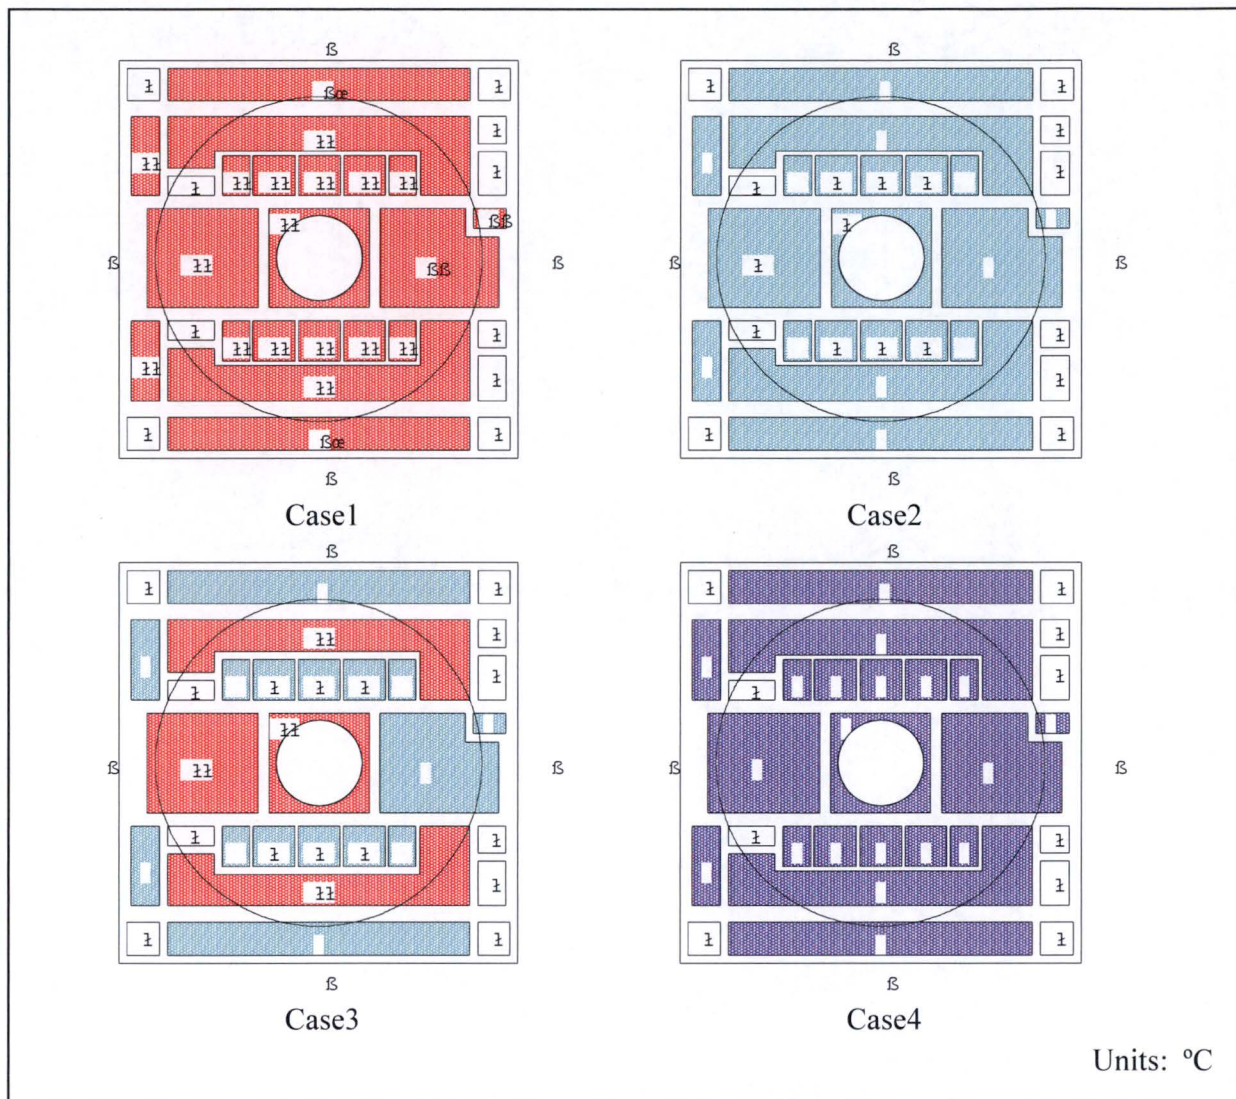


Figure 5.2.2-3 Temperature Distributions in Upper Pools

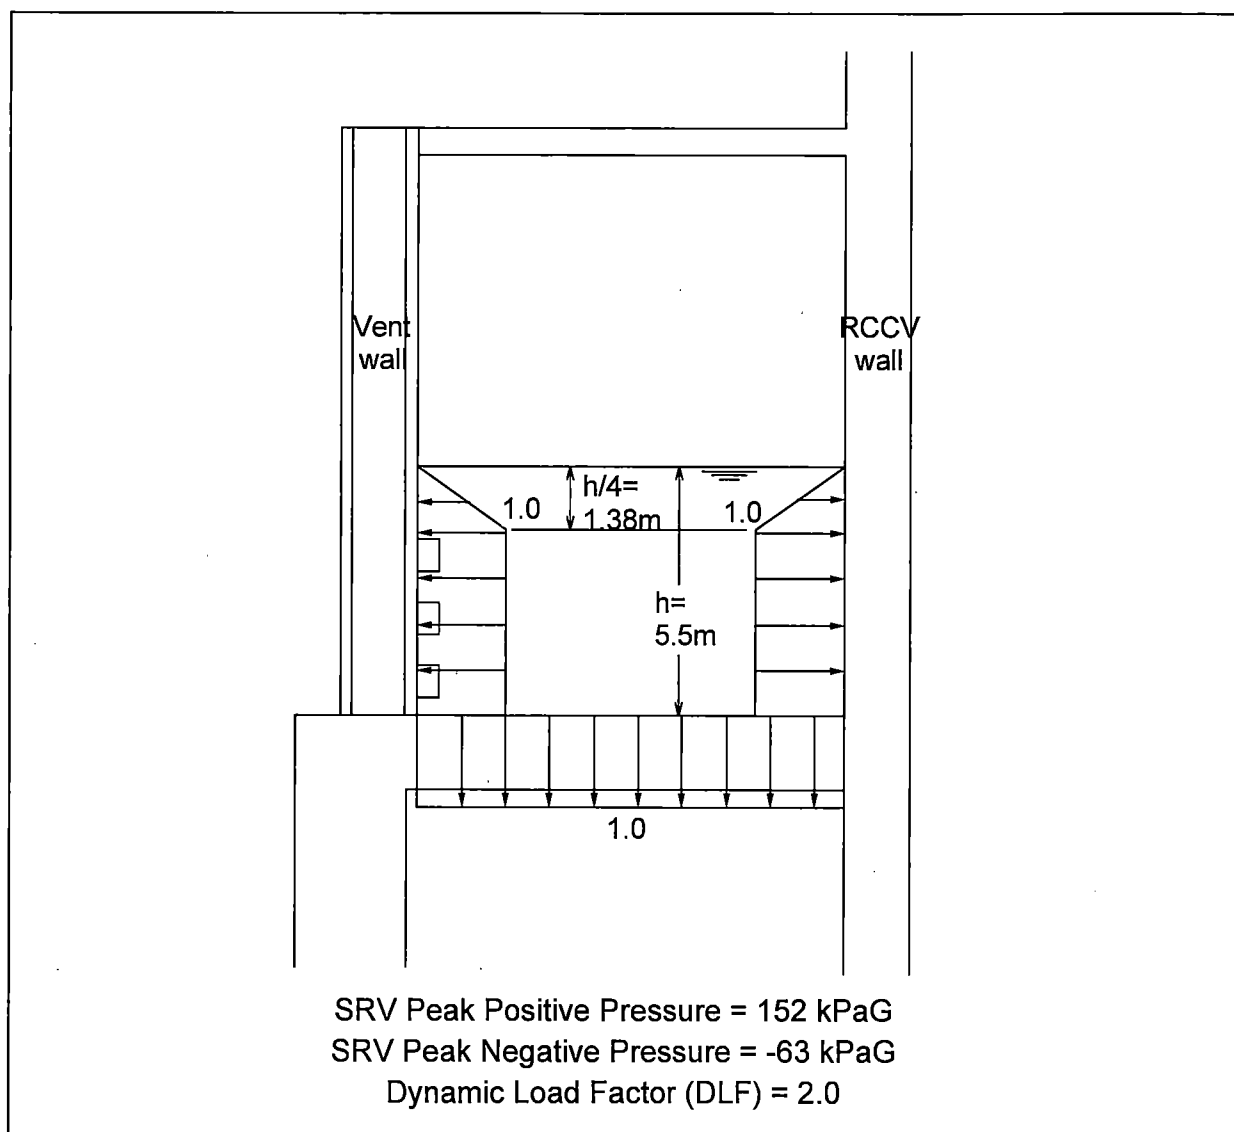


Figure 5.2.3-1 Safety Relief Valve (SRV) Pressure Loads


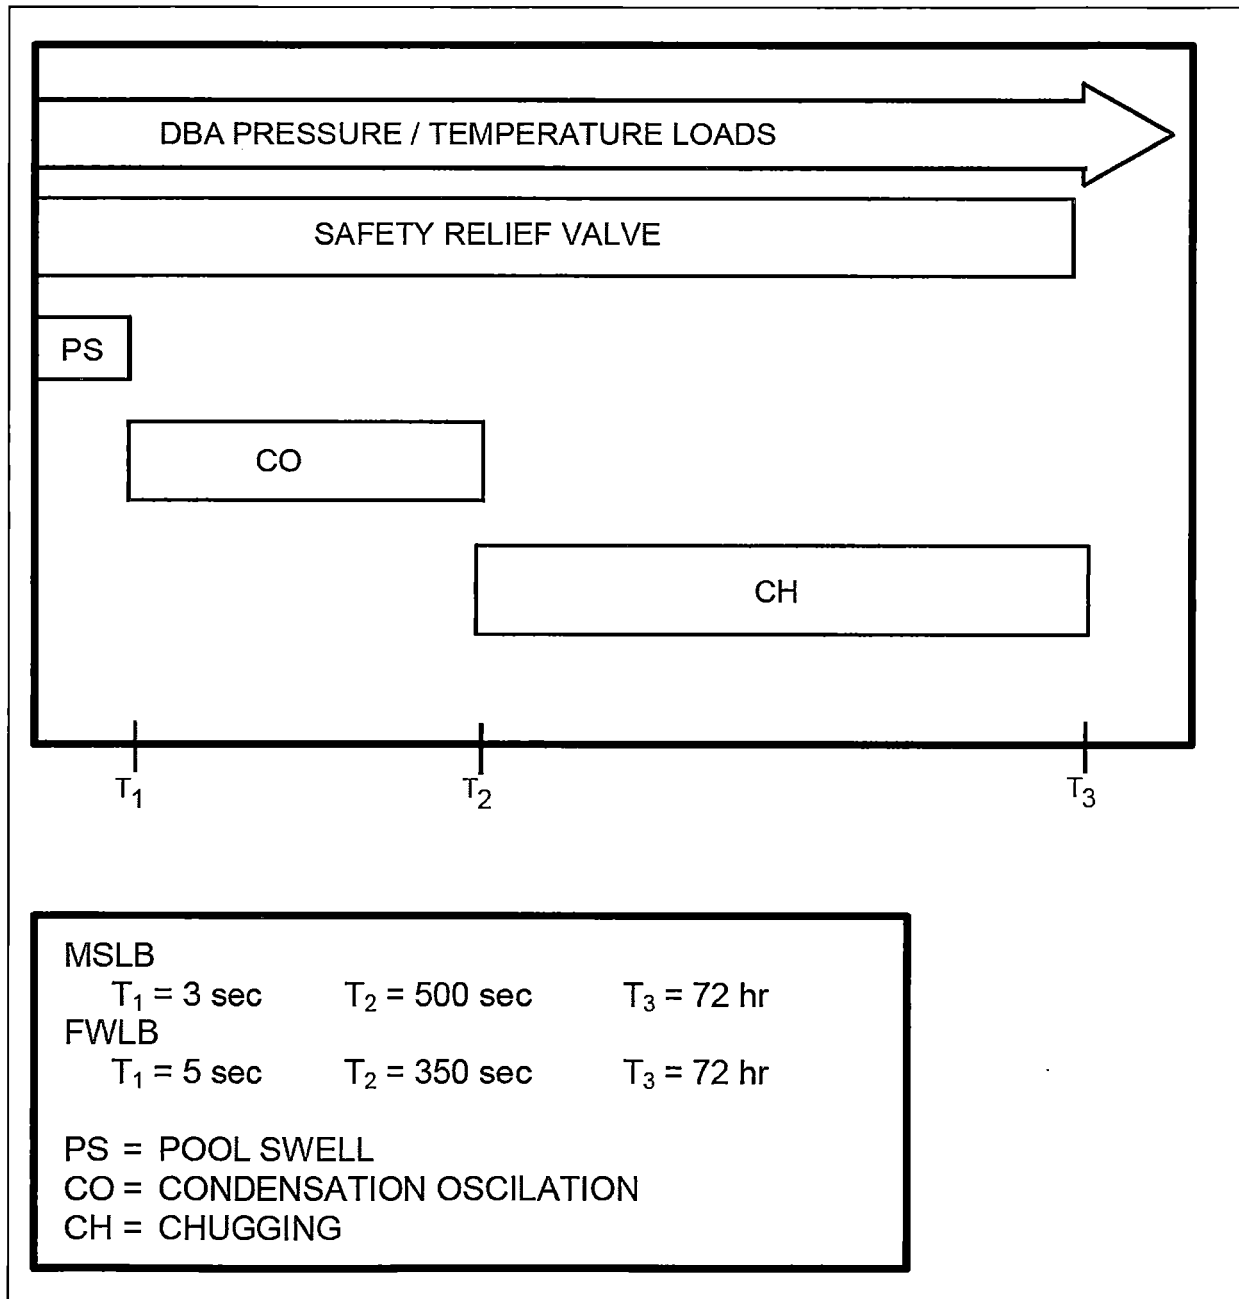


Figure 5.2.3-2 Typical Event – Time Relationship for a DBA

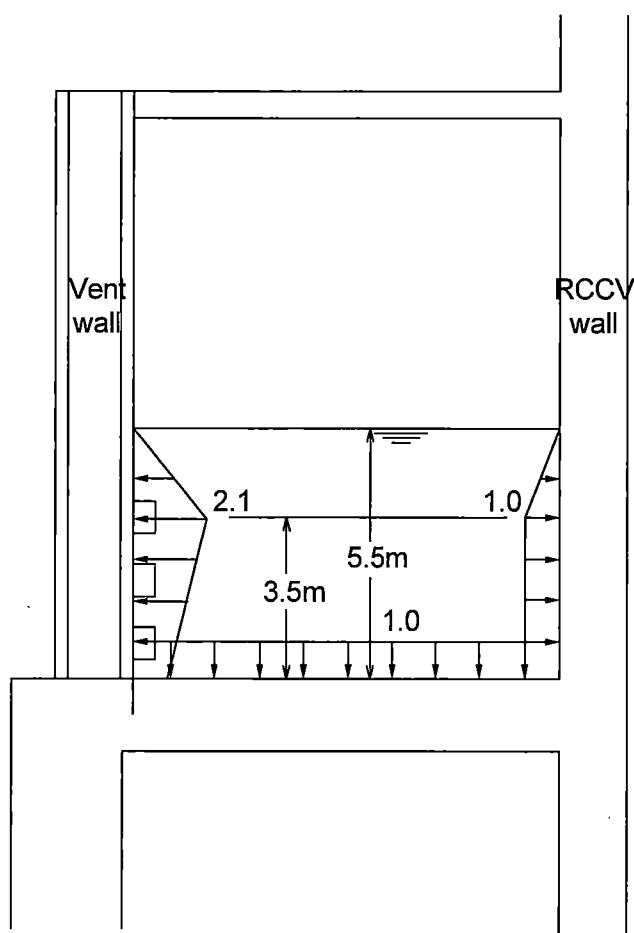

CH Peak Positive Pressure = 91 kPag
CH Peak Negative Pressure = -66 kPag
Dynamic Load Factor (DLF) = 2.0

Figure 5.2.3-3 Chugging (CH) Pressure Loads


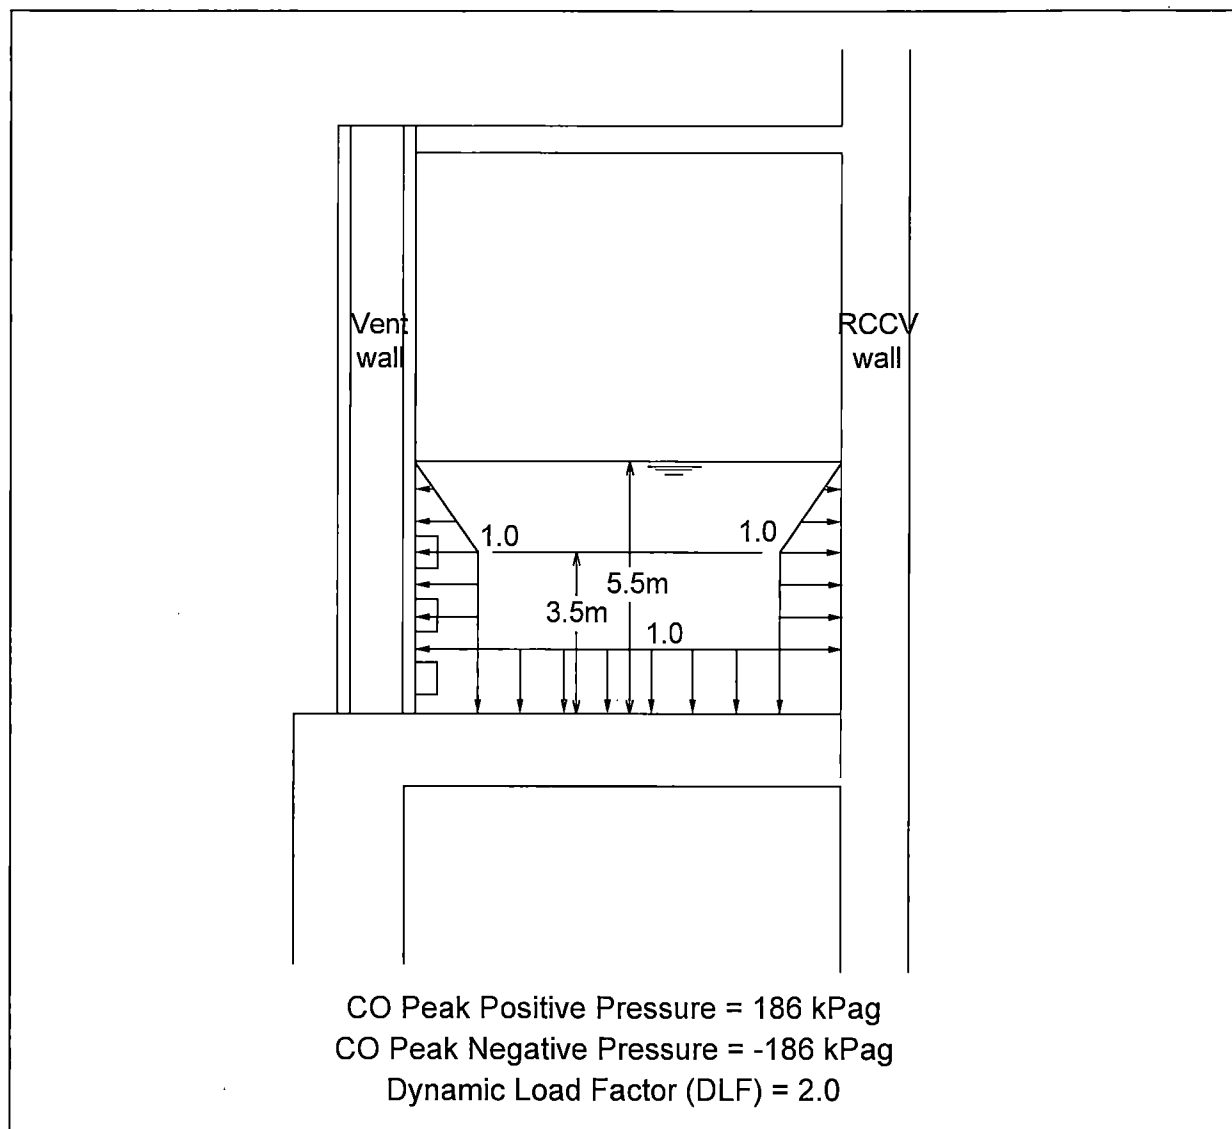



Figure 5.2.3-4 Condensation Oscillation (CO) Pressure Loads

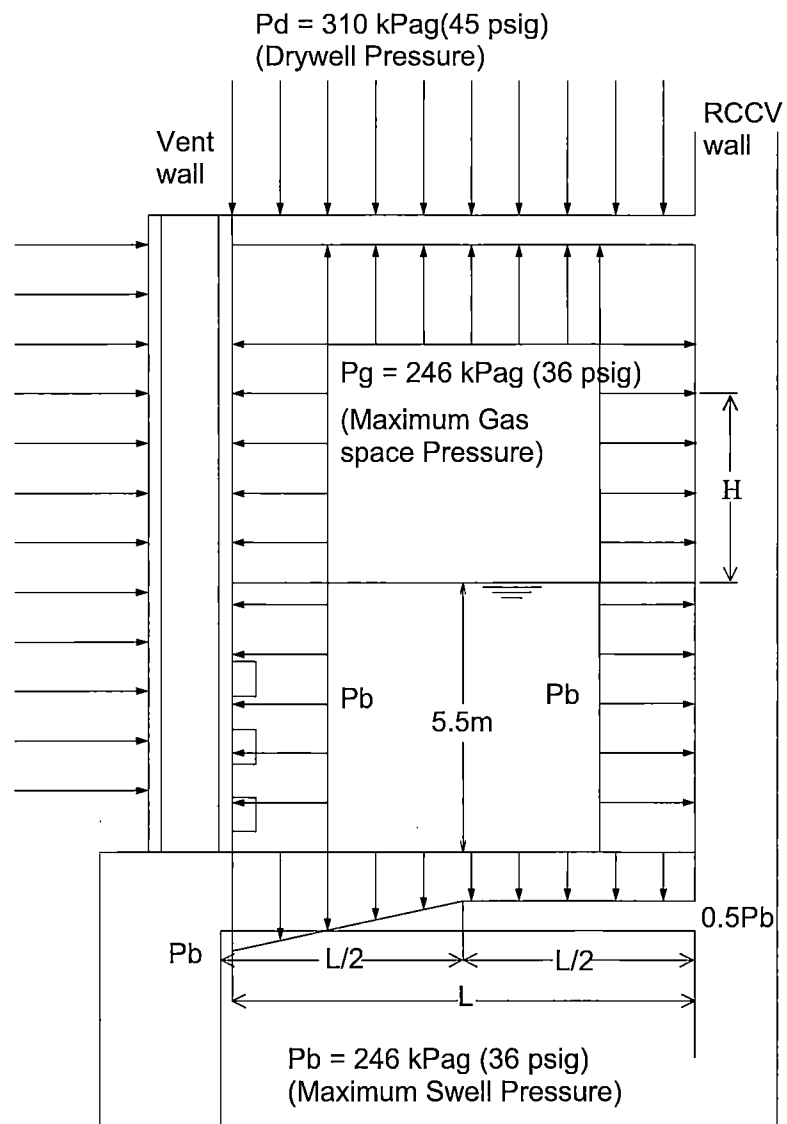


Note:

1. Pool swell height H is 4.5 m.
2. The differential pressure between the DW and WW is 64 kPag as wetwell gas space is at its peak pressure during pool swell.

Figure 5.2.3-5 Pool Swell (PS) Pressure Loads

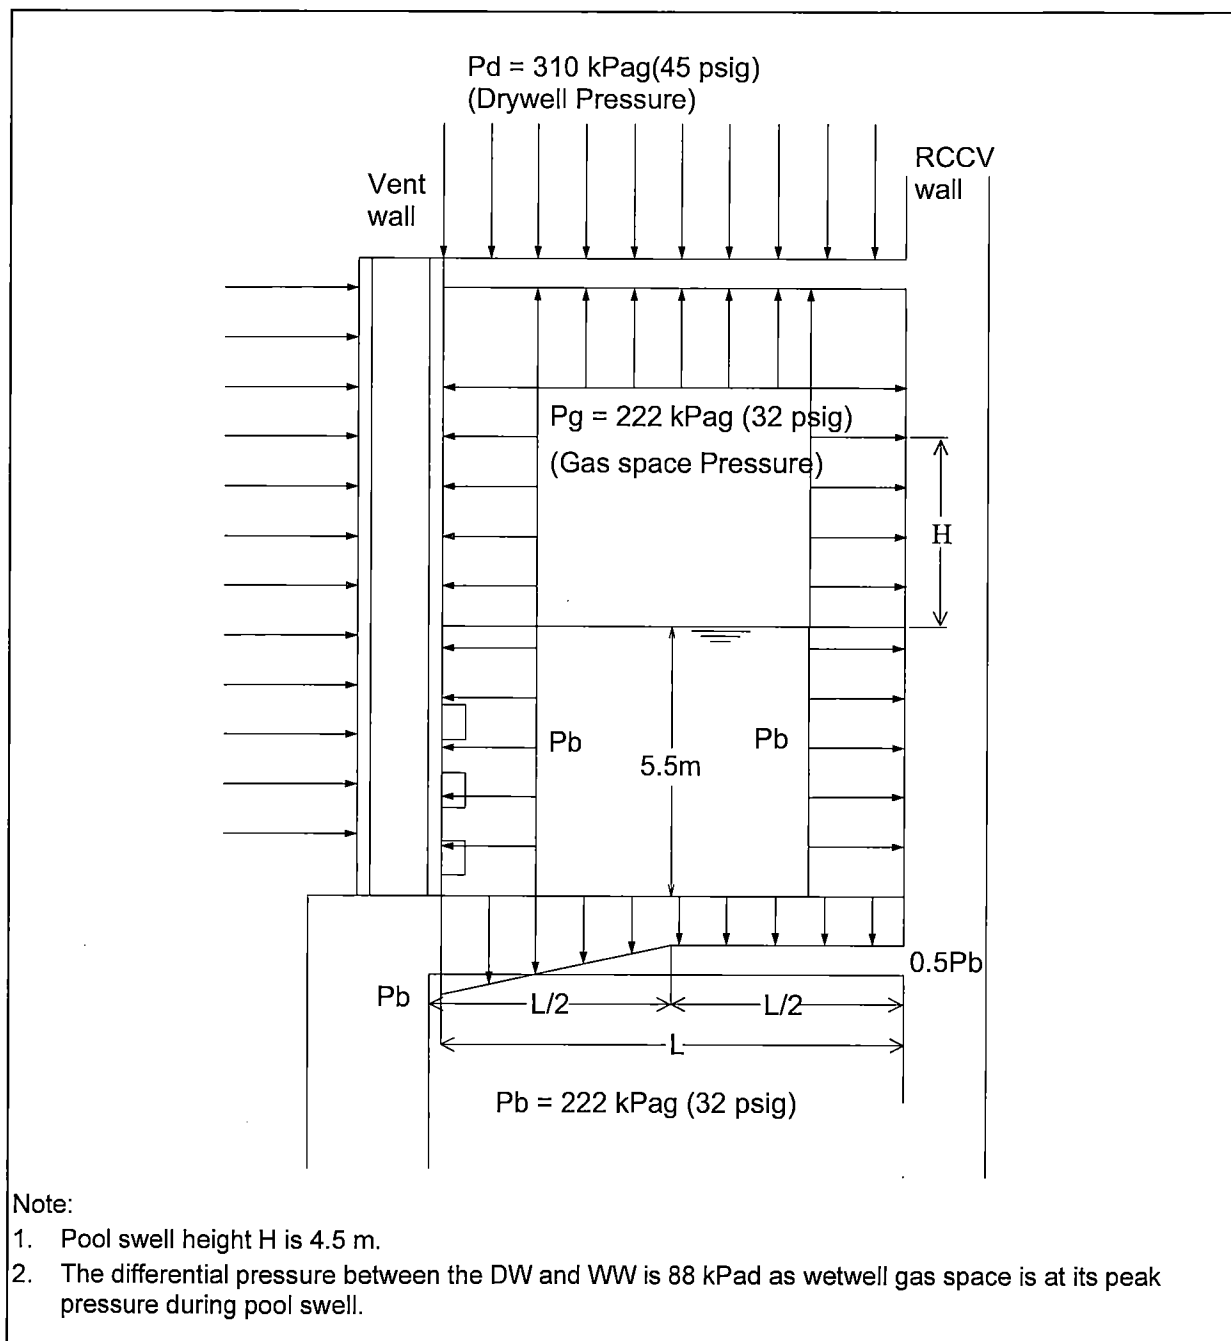**Figure 5.2.3-6 Pool Swell (PS) Pressure Concurrent with Froth Impact Loads**

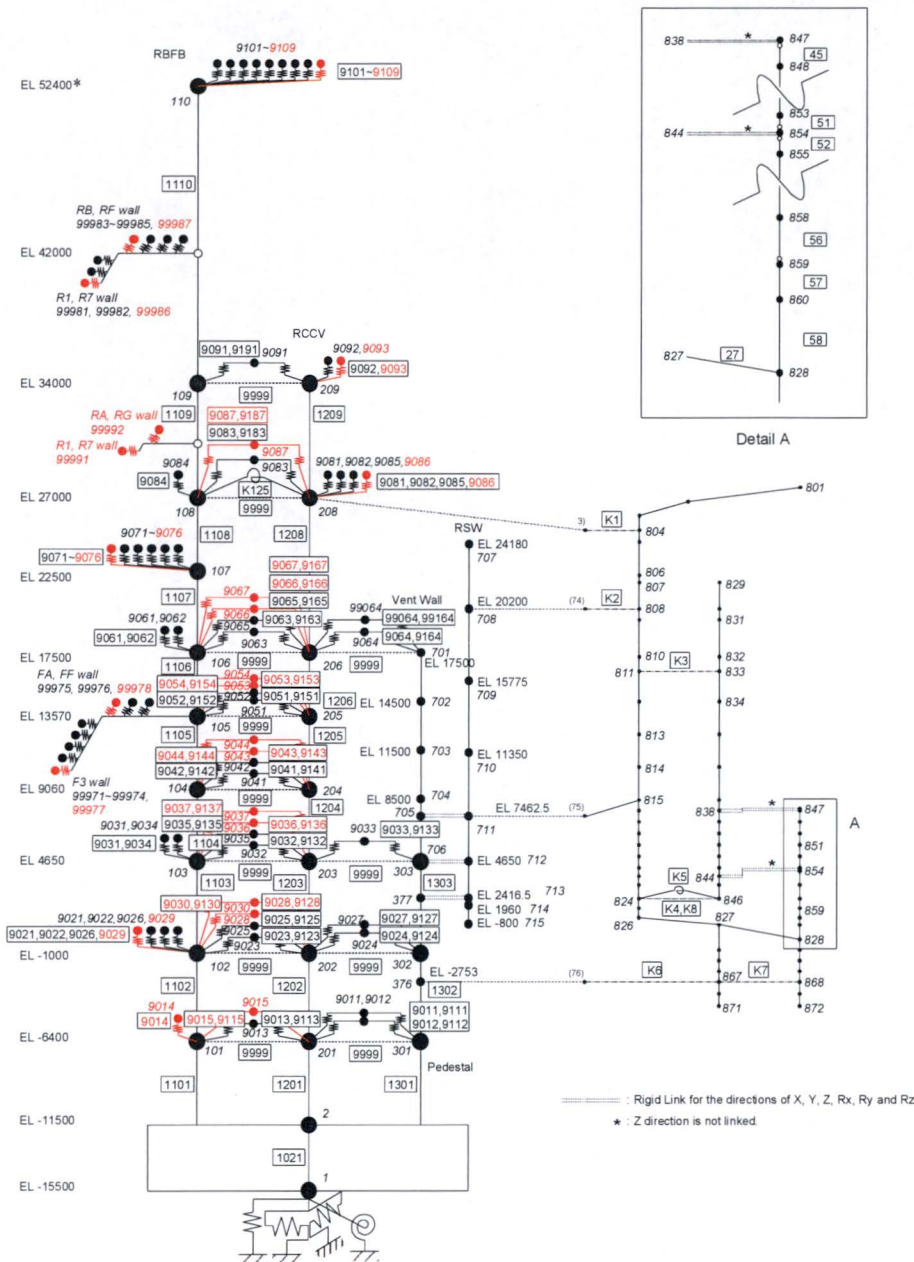

*:The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.

Note: Slab oscillator node 99064 is only for the model considering 0% of infill concrete stiffness of the vent wall and diaphragm floor.

Additional oscillators for cracked model are shown in red.

Figure 5.3.3-1 Dynamic Analysis Model



HITACHI

WG3-U71-ERD-S-0004

SH NO. 257

REV. 2

of 543




Figure 5.3.3-2 Position of Each Pool

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}




Figure 6.2.2-1 FE Model of RB/FB (Whole View)

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}




Figure 6.2.2-2 FE Model of RB/FB (Cut View)

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}




HITACHI


WG3-U71-ERD-S-0004 SH NO. 260

REV. 2

of 543

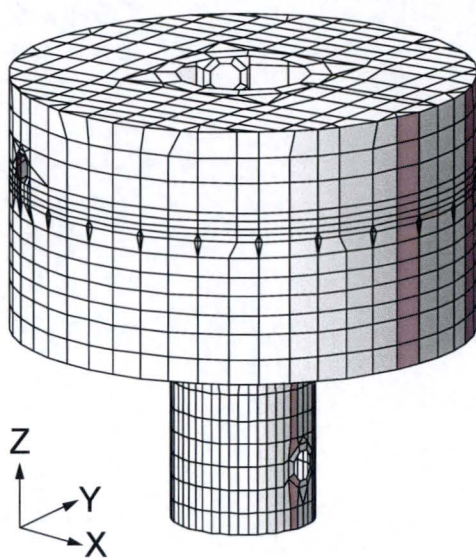


Whole View

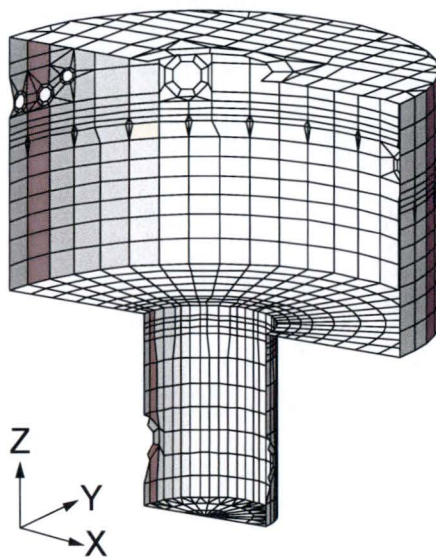


Cut View

Figure 6.2.2-3 FE Model of RCCV Liner

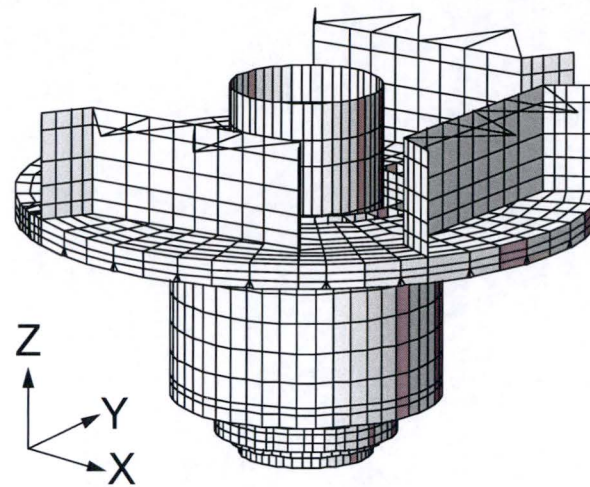

Whole View

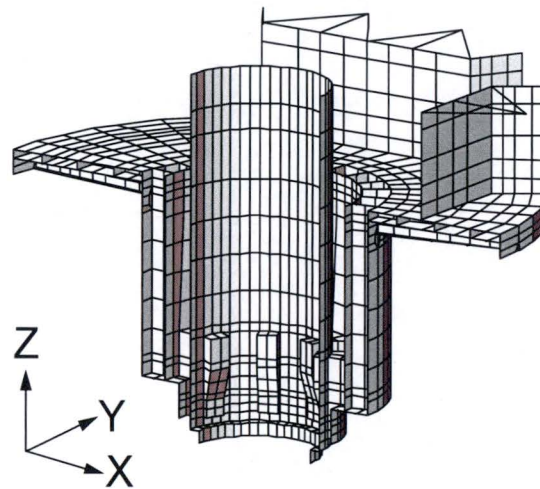

Cut View

Figure 6.2.2-4 FE Model of RCCV Internal Structures

{

}

Figure 6.2.2-5 FE Model of the Basemat

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}




Figure 6.2.2-6 FE Model of the Basemat inside the Containment

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}




Figure 6.2.2-7 FE Model of the RCCV Cylinder Wall and the Wall below RCCV

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



Figure 6.2.2-8 FE Model of the RPV Pedestal Wall

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



Figure 6.2.2-9 FE Model of the Top Slab

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}




Figure 6.2.2-10 FE Model of the Suppression Pool Floor Slab

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}




Figure 6.2.2-11 FE Model of the RCCV Cylinder Wall Liner

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}




Figure 6.2.2-12 FE Model of the RPV Pedestal Wall Liner

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}

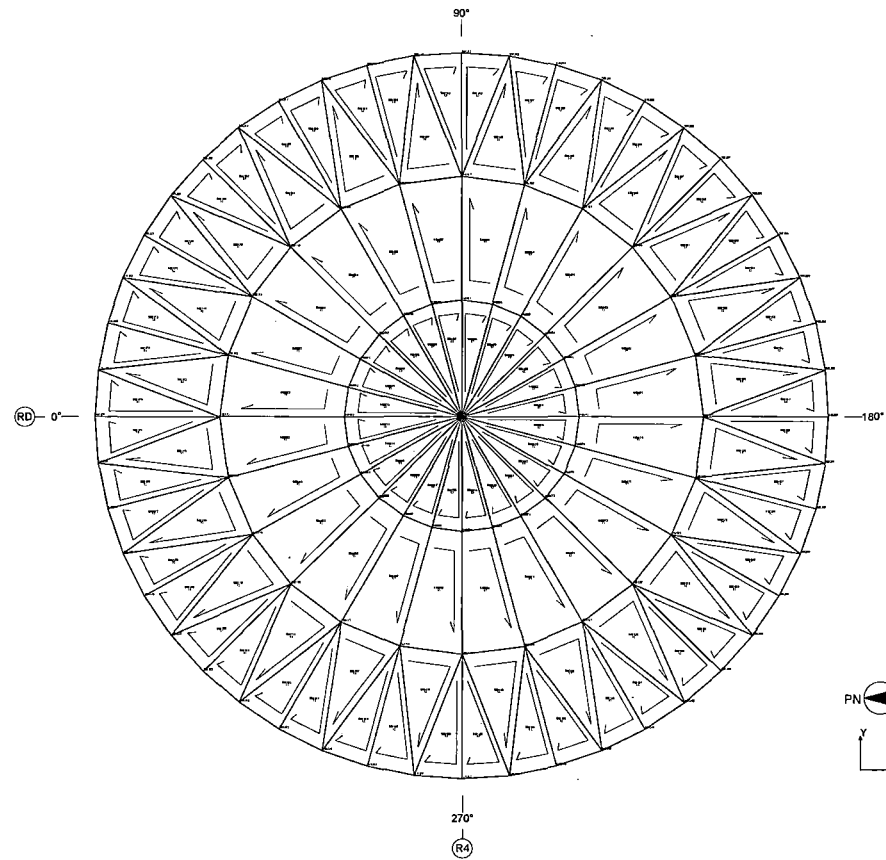


Figure 6.2.2-13 FE Model of the Basemat Liner (EL -10,400)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 271

REV. 2

of 543

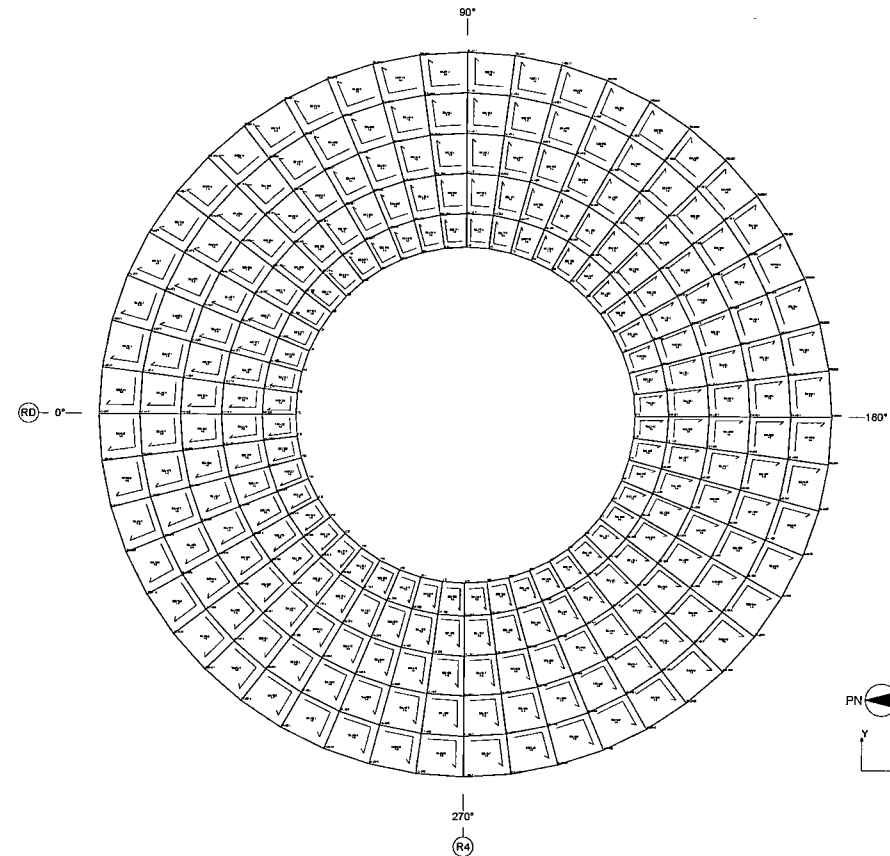


Figure 6.2.2-14 FE Model of the Suppression Pool Floor Slab Liner (EL 4,650)

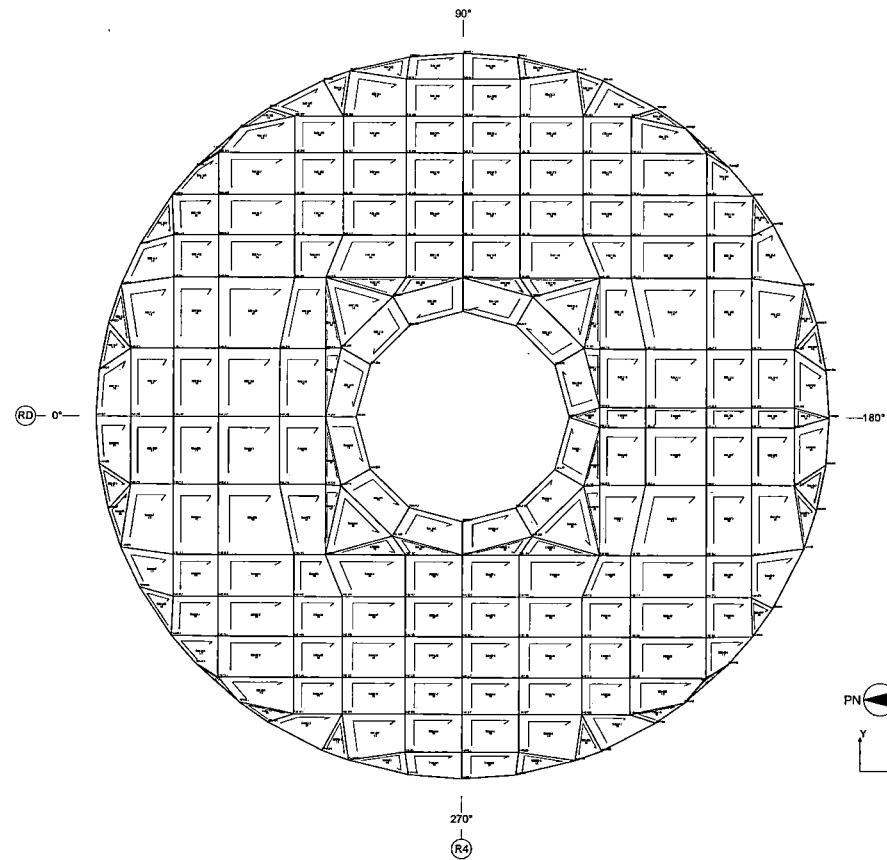


Figure 6.2.2-15 FE Model of the Top Slab Liner (EL 24,600)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 273

REV. 2

of 543

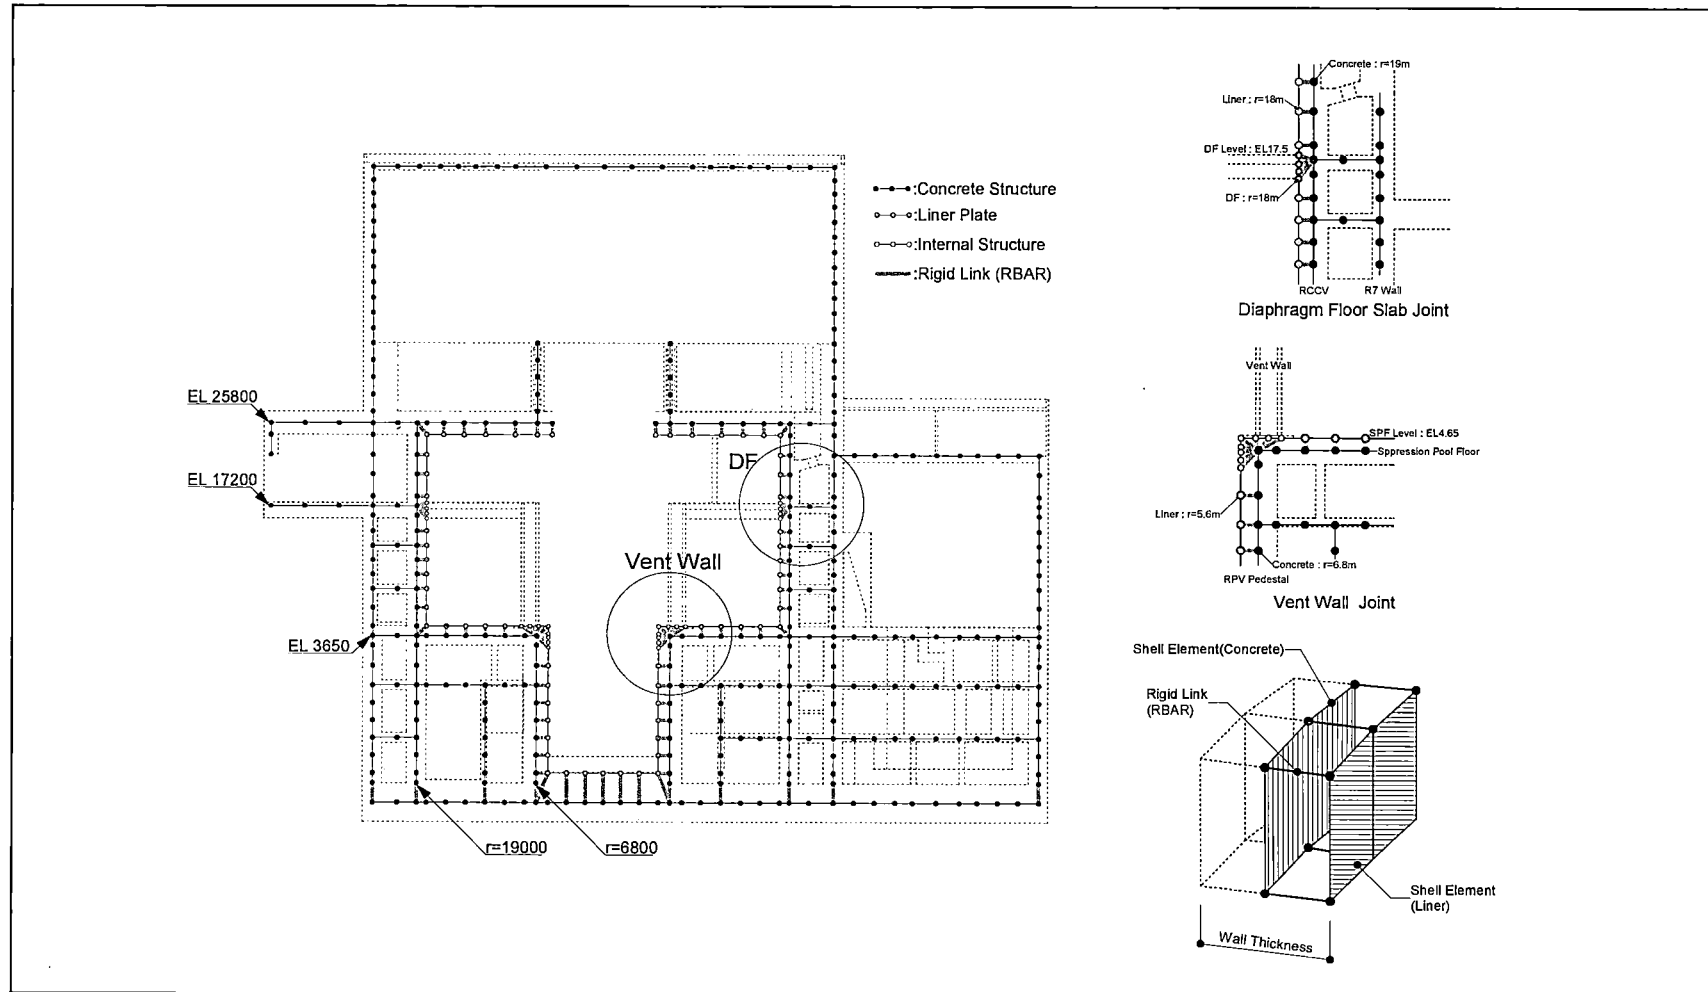


Figure 6.2.2-16 Rigid Bar Elements between Concrete and Liner

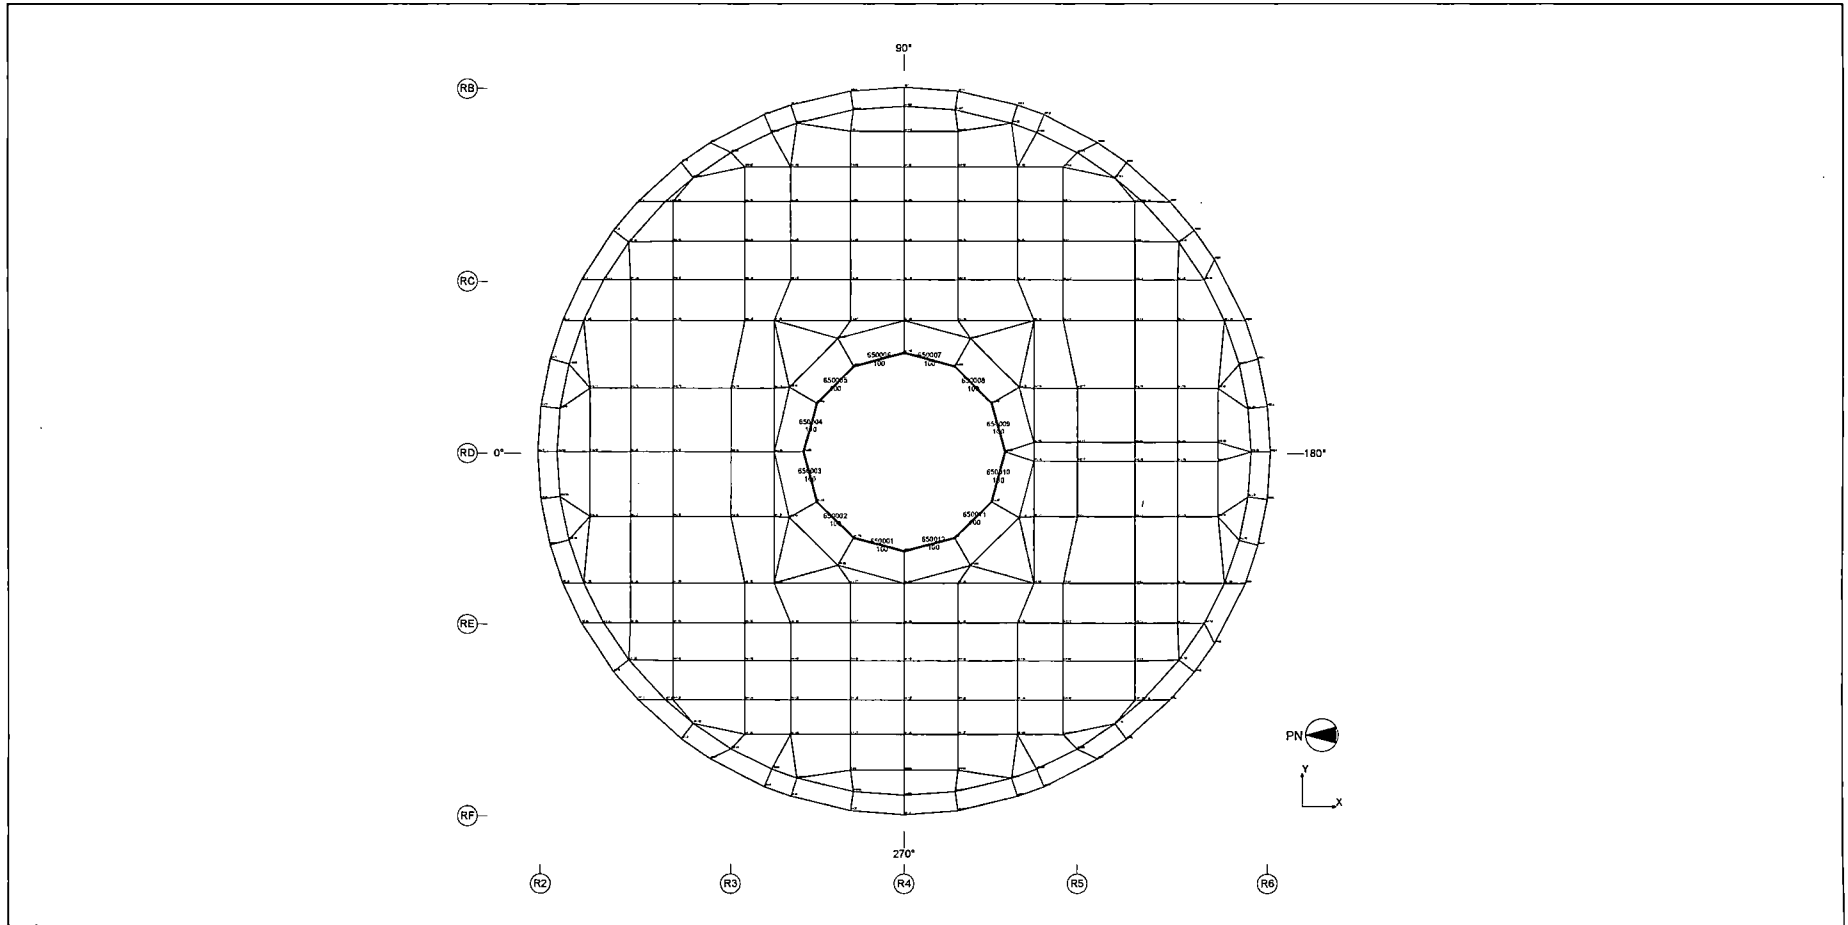


Figure 6.2.2-17 FE Model of Sleeve at the RCCV Top Head Opening

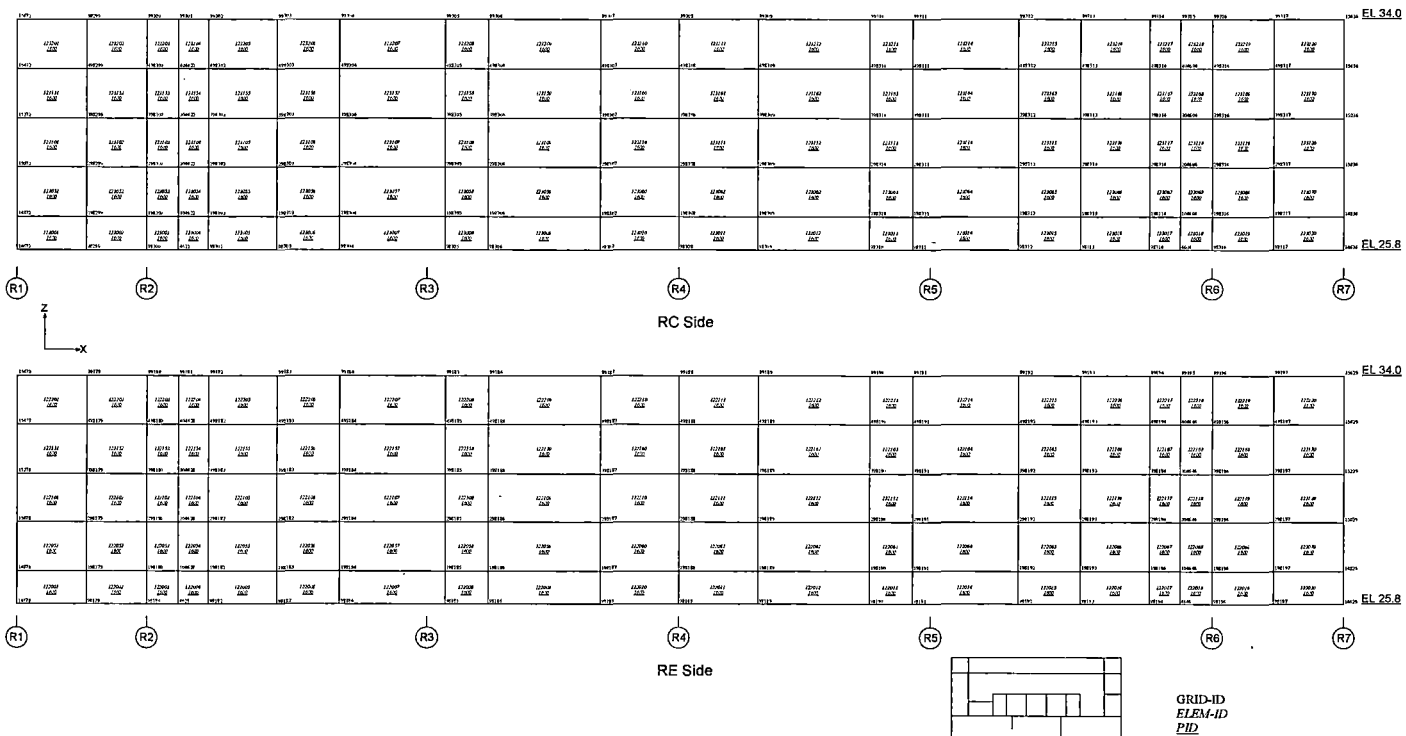


Figure 6.2.2-19 FE Model of the Pool Girders



HITACHI

WG3-U71-ERD-S-0004 SH NO. 277

REV. 2

of 543

{

}

Figure 6.2.2-20 Layout of Inner Walls Included in the Analysis Model at EL -11,500

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004	SH NO. 278
REV. 2	of 543

{

}

Figure 6.2.2-21 Layout of Inner Walls Included in the Analysis Model at EL -6,400

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004 SH NO. 279

REV. 2 of 543

{

}

Figure 6.2.2-22 Layout of Inner Walls Included in the Analysis Model at EL -1,000

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}

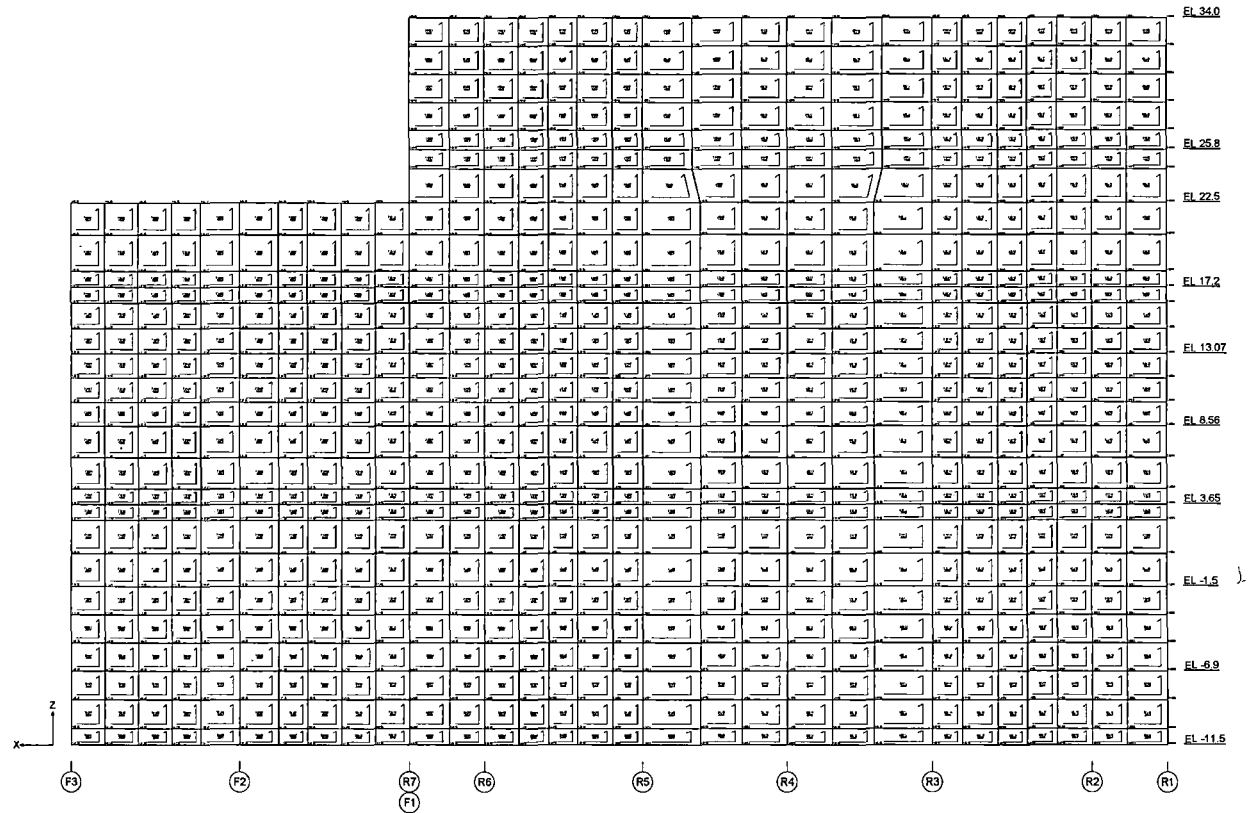


Figure 6.2.2-23 FE Model of the External Wall (RA/FA Column Line)

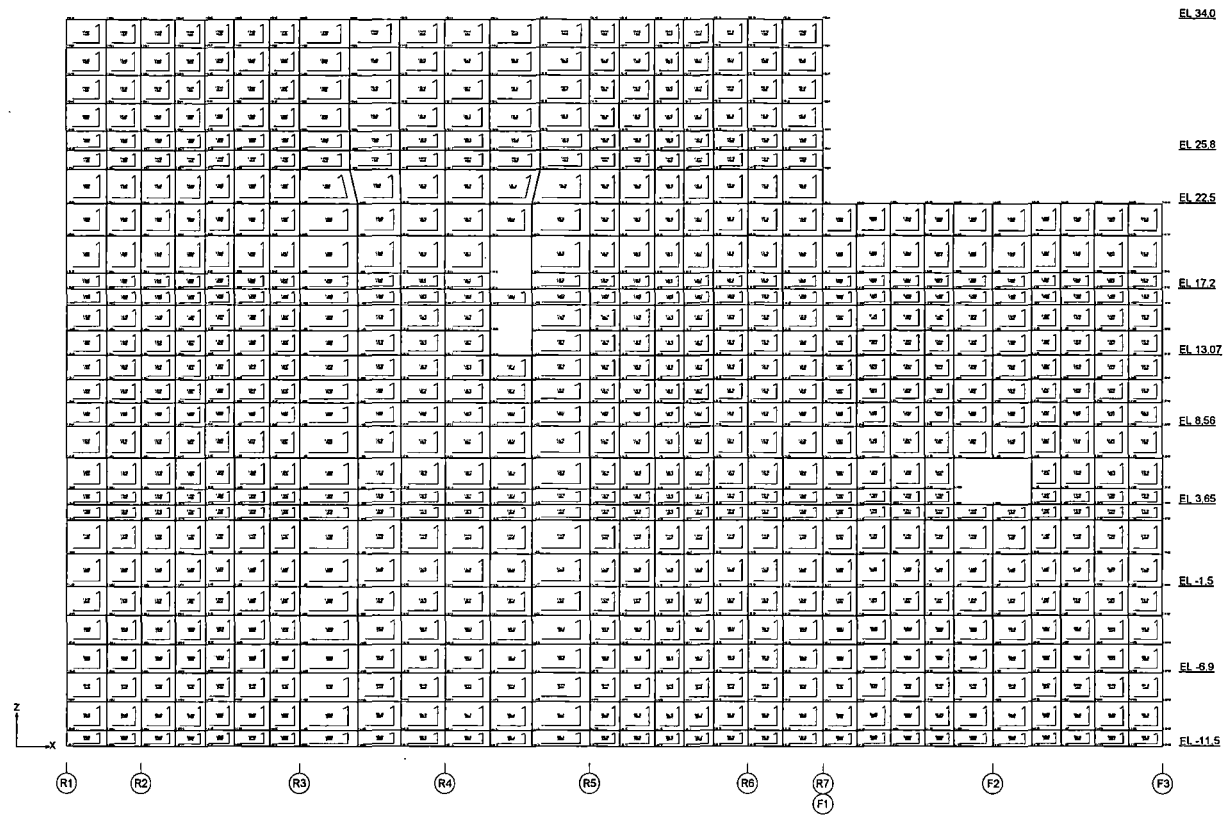


Figure 6.2.2-24 FE Model of the External Wall (RG/FF Column Line)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 282

REV. 2

of 543

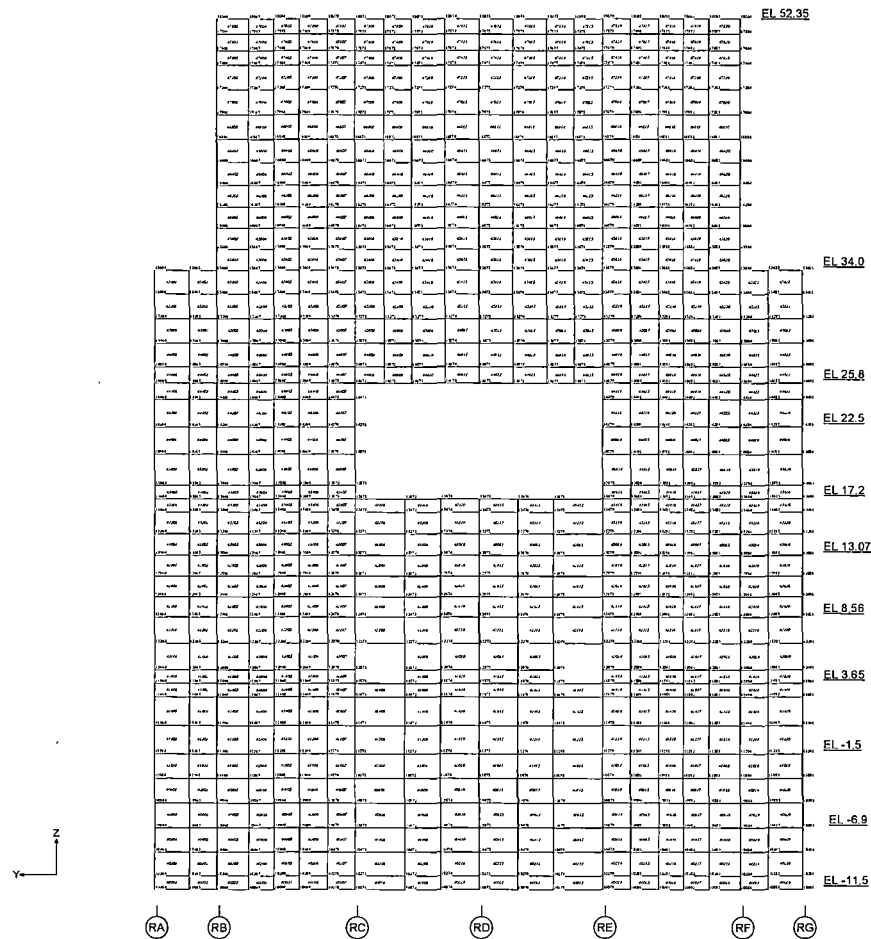


Figure 6.2.2-25 FE Model of the External Wall (R1 Column Line)

GRID-ID
ELEM-ID

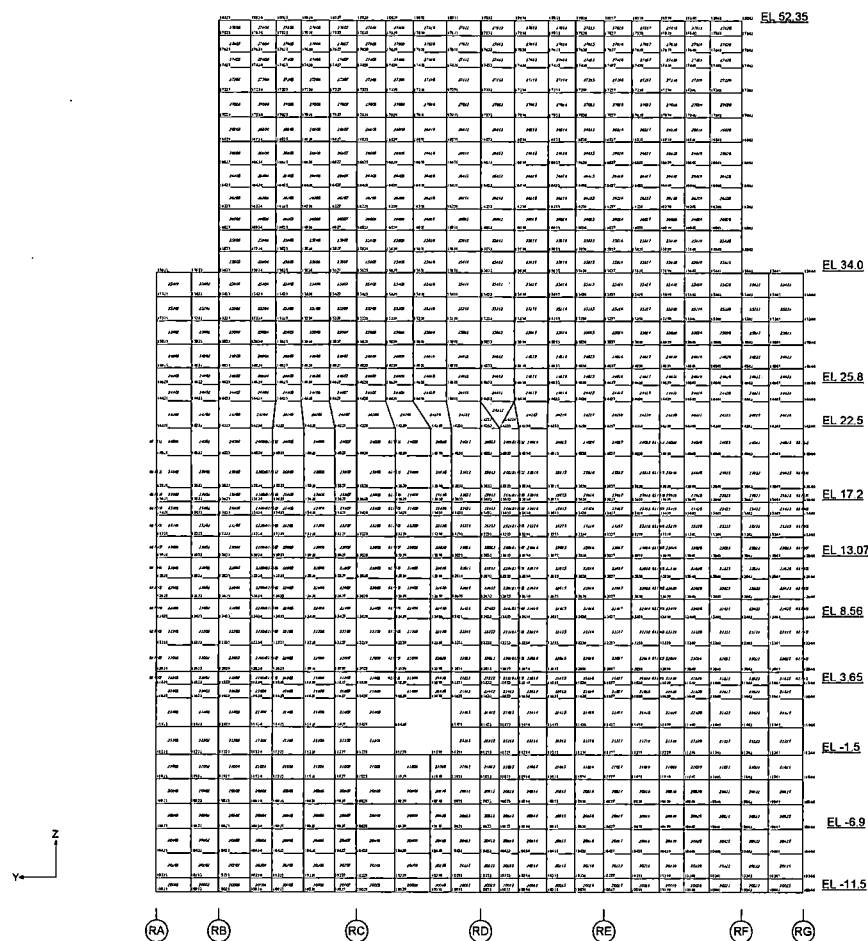


Figure 6.2.2-26 FE Model of the External Wall (R7/F1 Column Line)

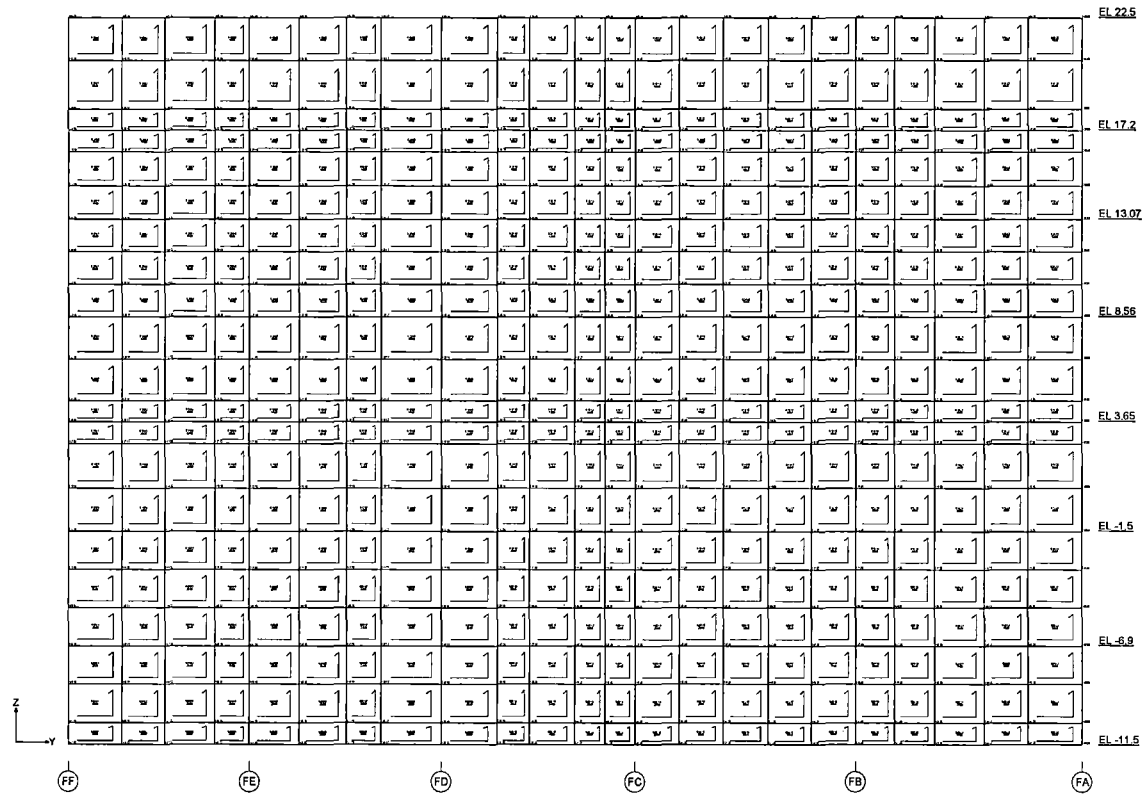


Figure 6.2.2-27 FE Model of the External Wall (F3 Column Line)

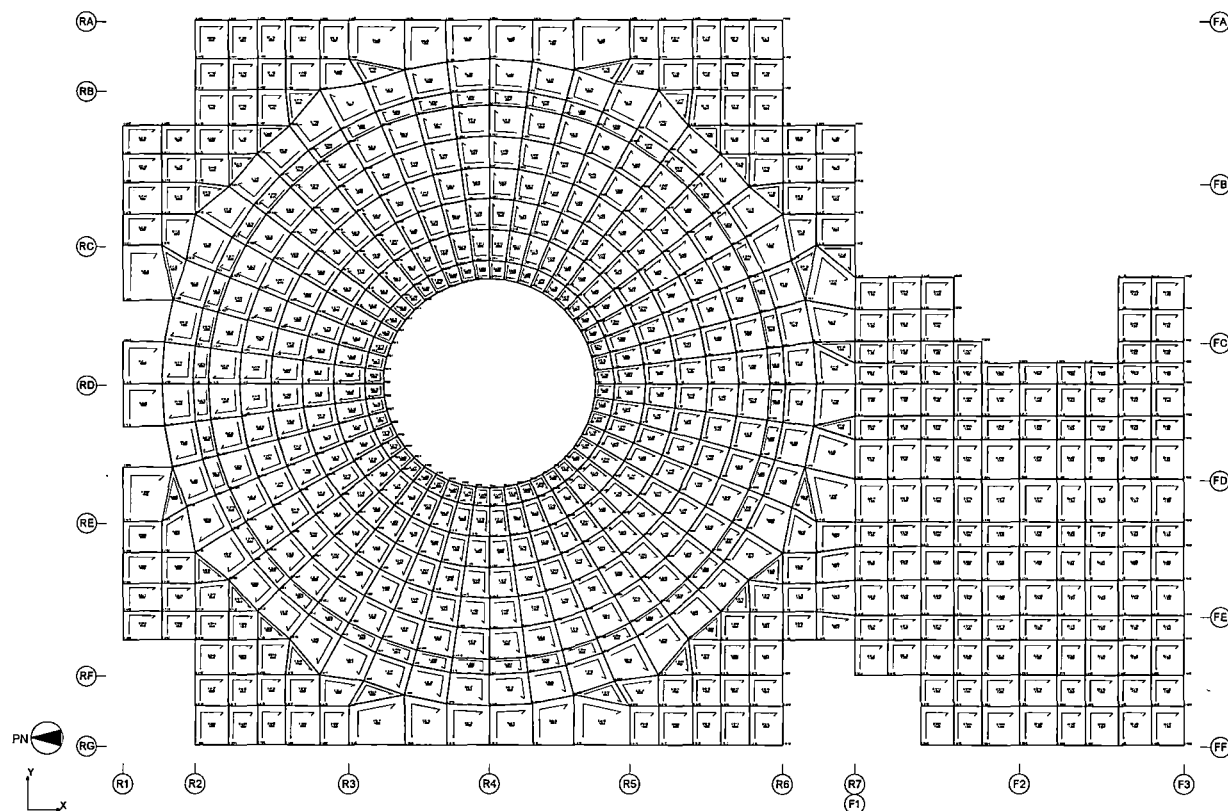


Figure 6.2.2-28 FE Model of the Slab at EL 4,650

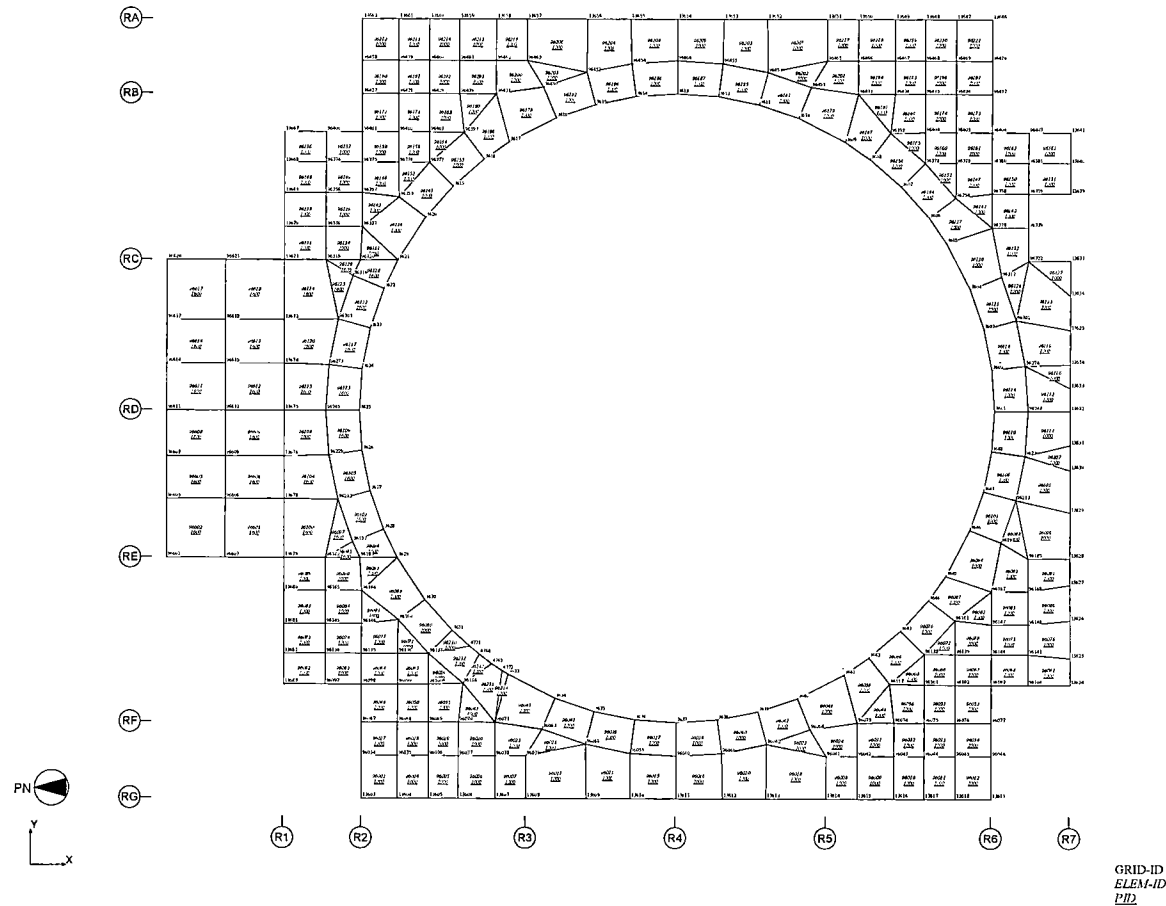


Figure 6.2.2-29 FE Model of the Slab at EL 17,500

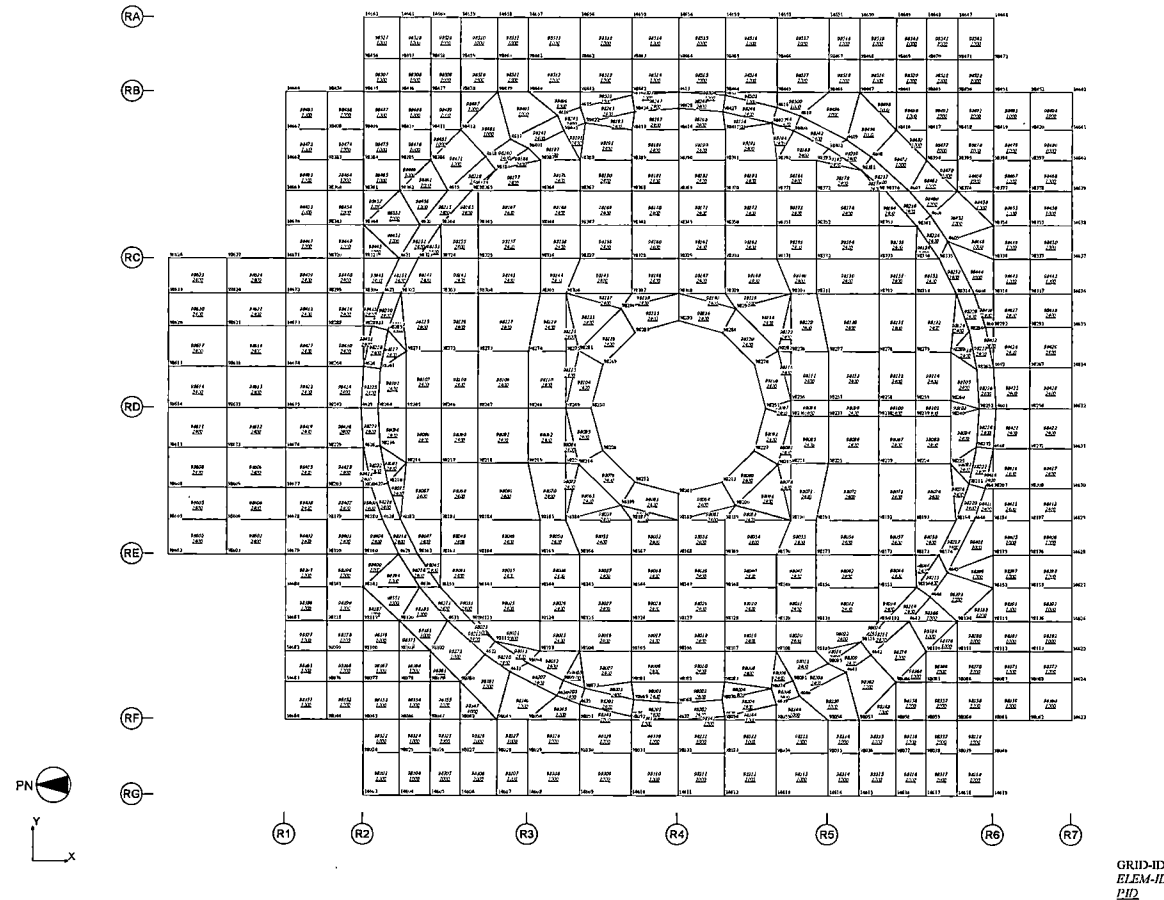


Figure 6.2.2-30 FE Model of the Slab at EL 27,000



HITACHI

WG3-U71-ERD-S-0004

SH NO. 288

REV. 2

of 543

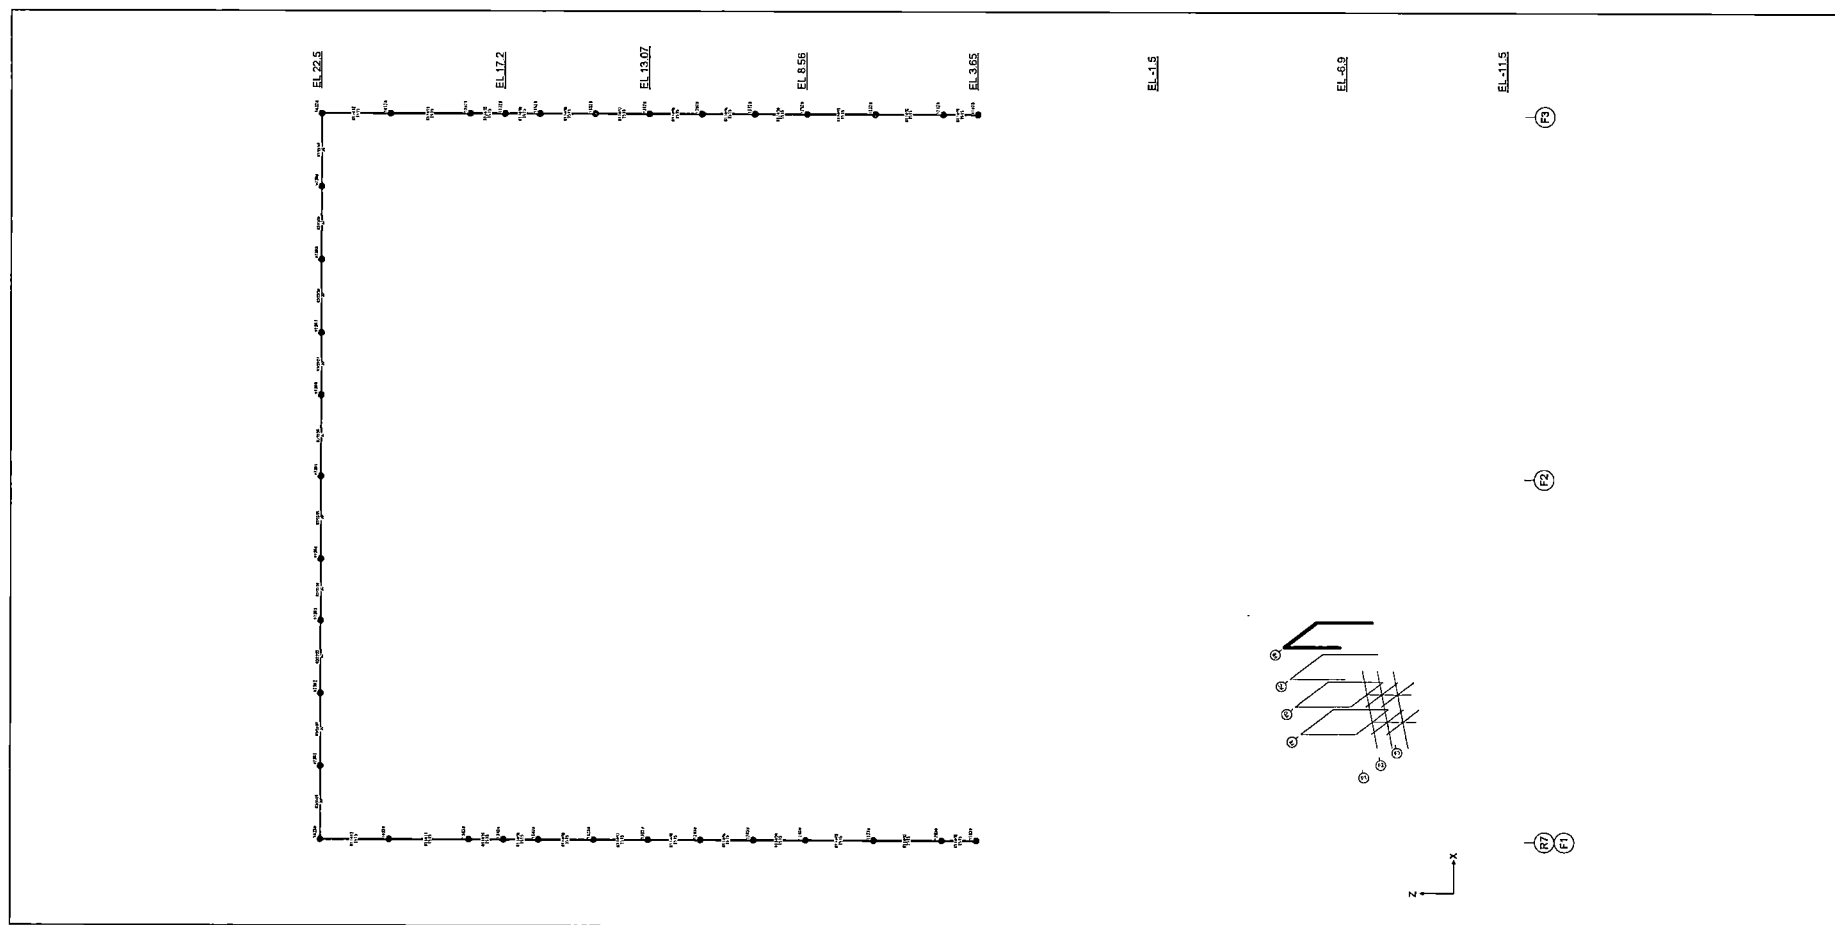


Figure 6.2.2-31 FE Model of the FB Frame (FB Column Line)



HITACHI

WG3-U71-ERD-S-0004 SH NO. 289
REV. 2 of 543

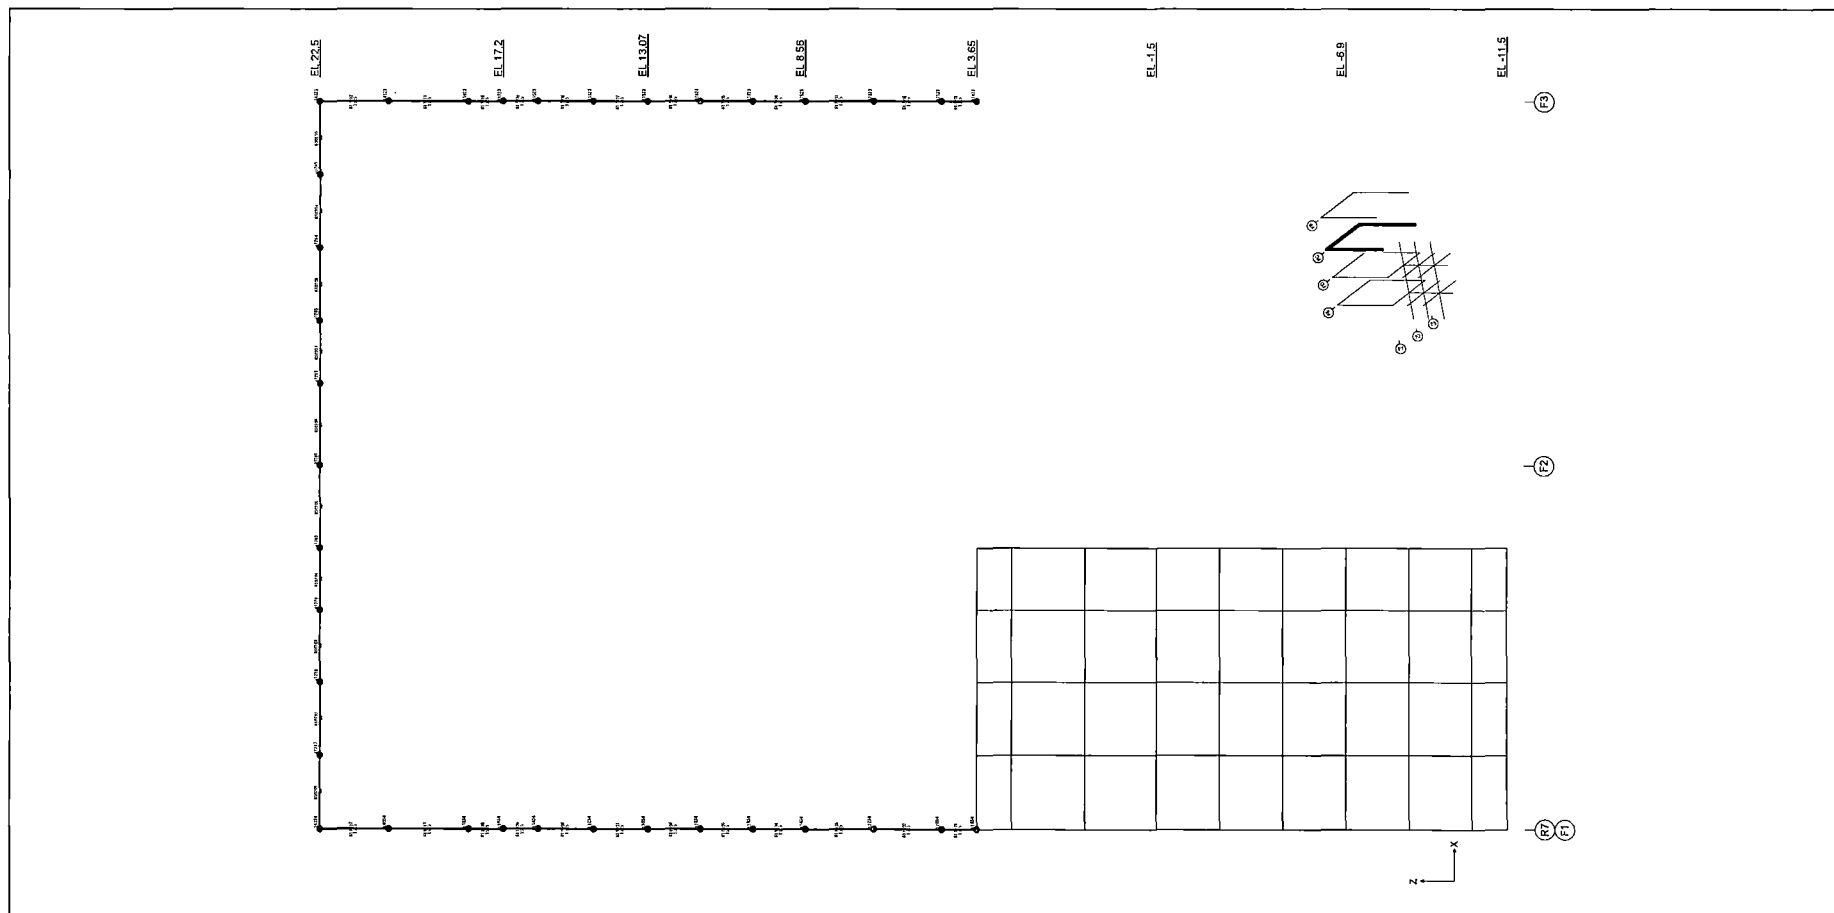


Figure 6.2.2-32 FE Model of the FB Frame (FC Column Line)

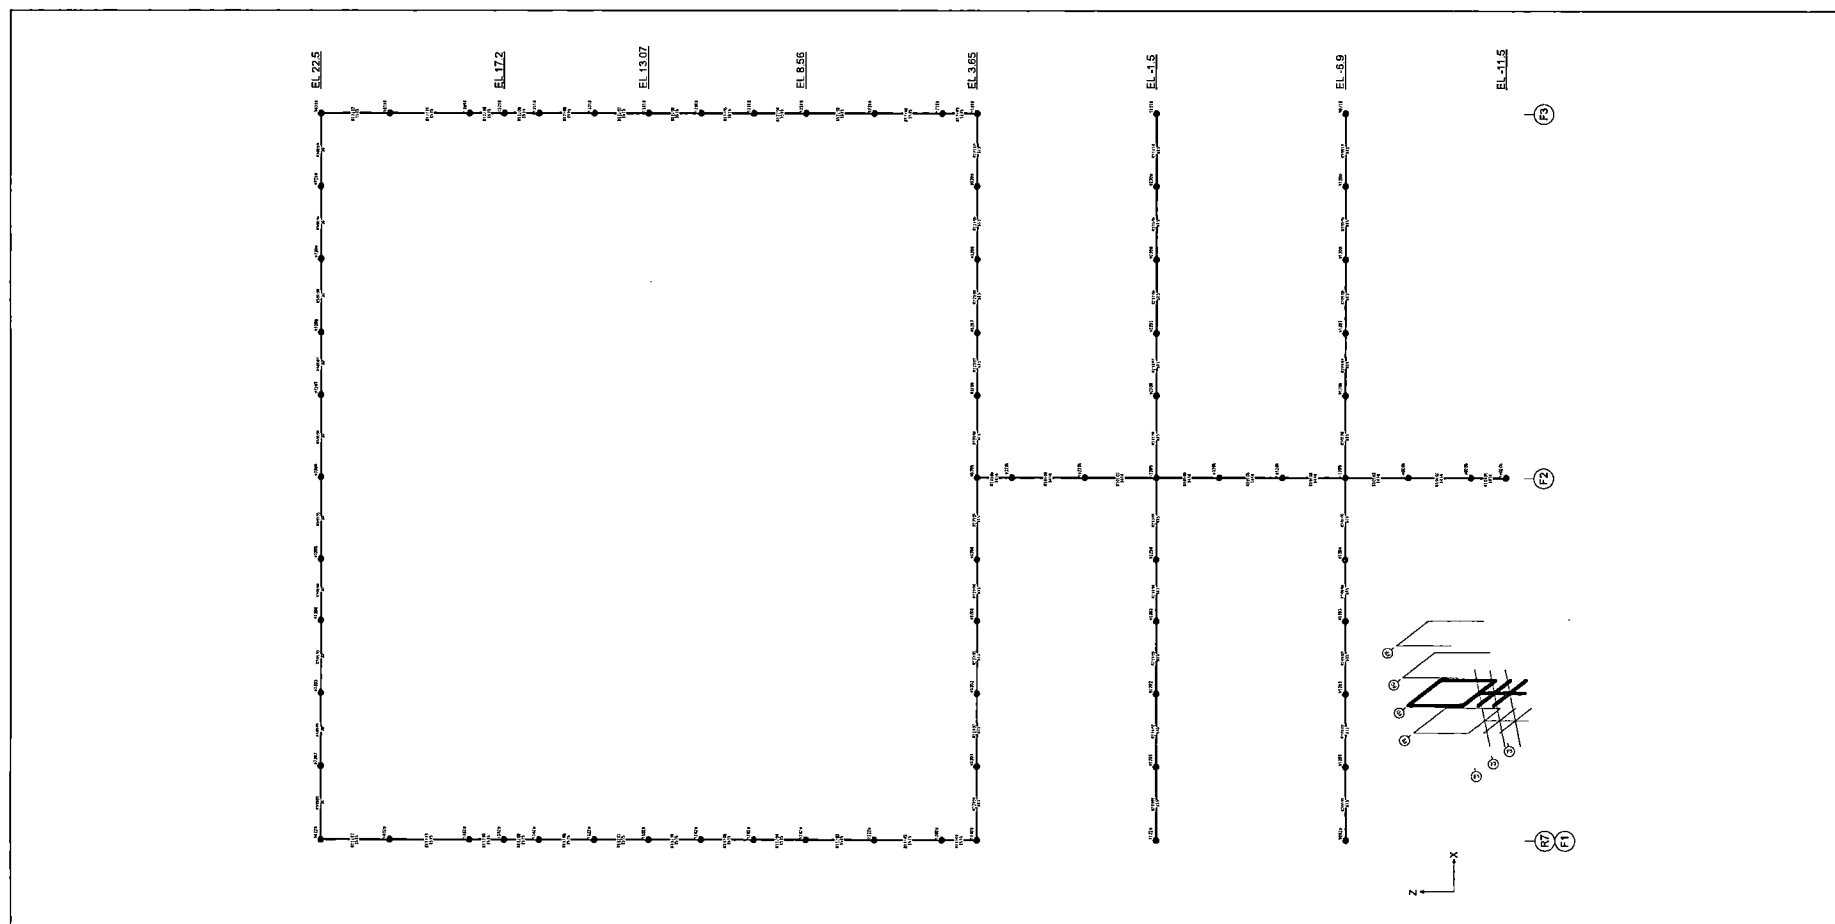


Figure 6.2.2-33 FE Model of the FB Frame (FD Column Line)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 291

REV. 2

of 543

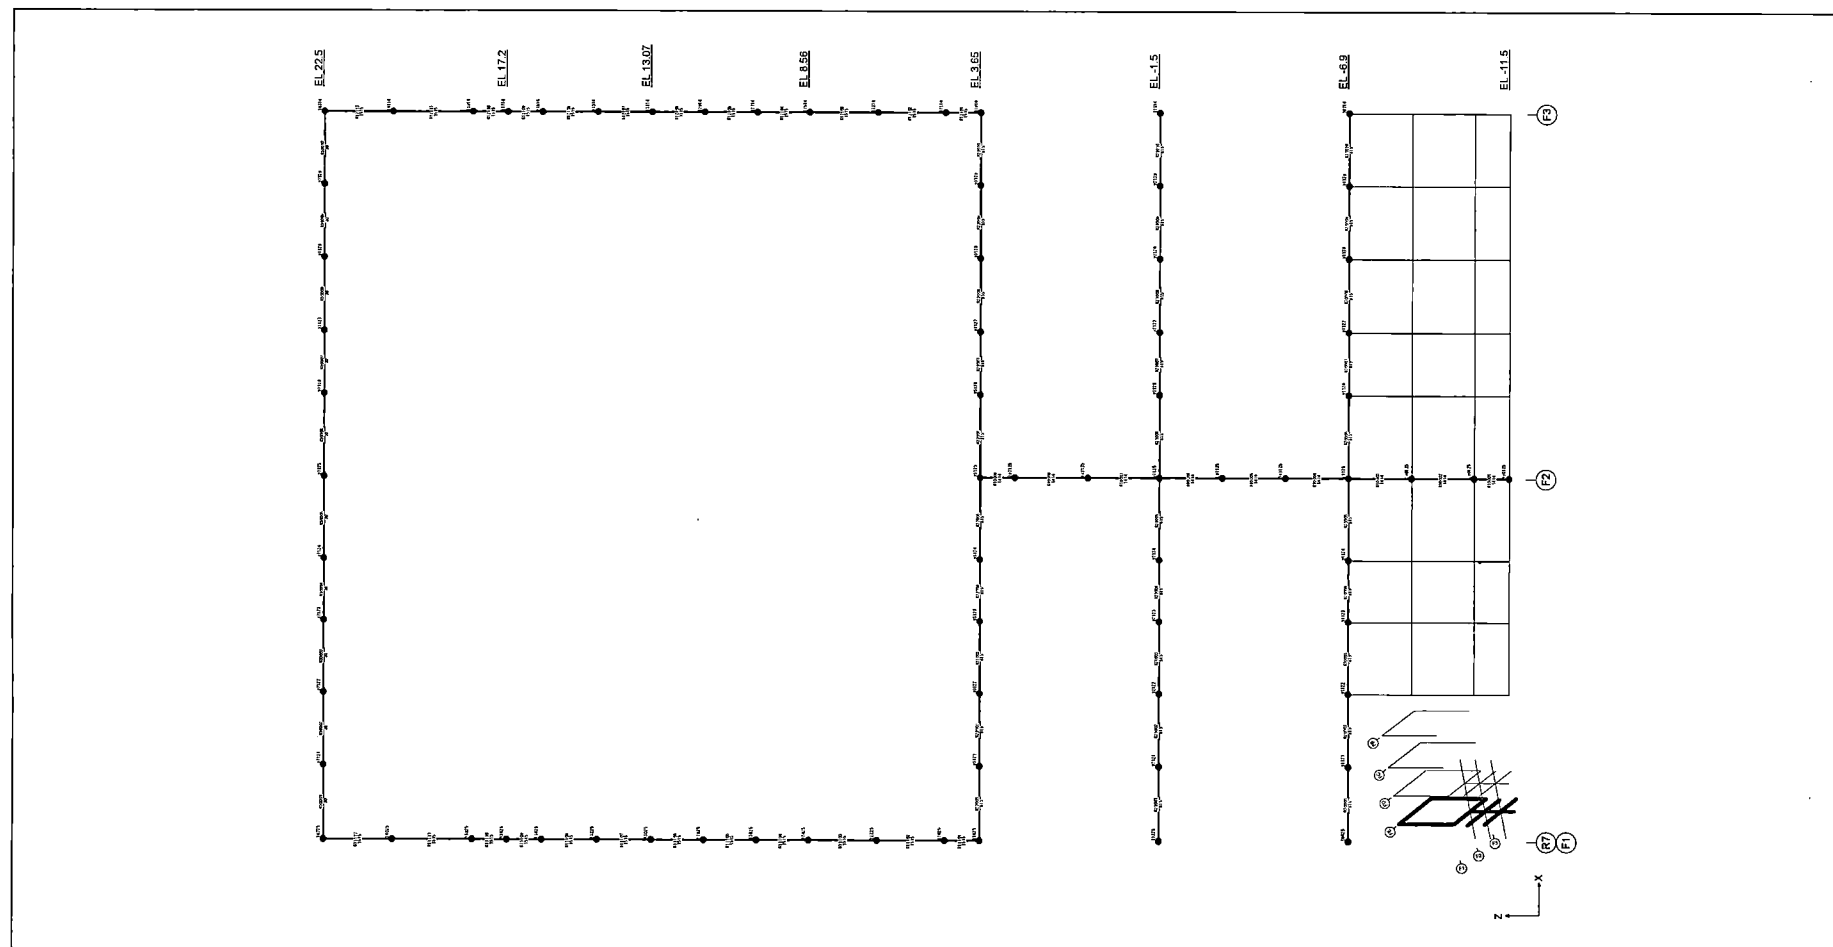


Figure 6.2.2-34 FE Model of the FB Frame (FE Column Line)

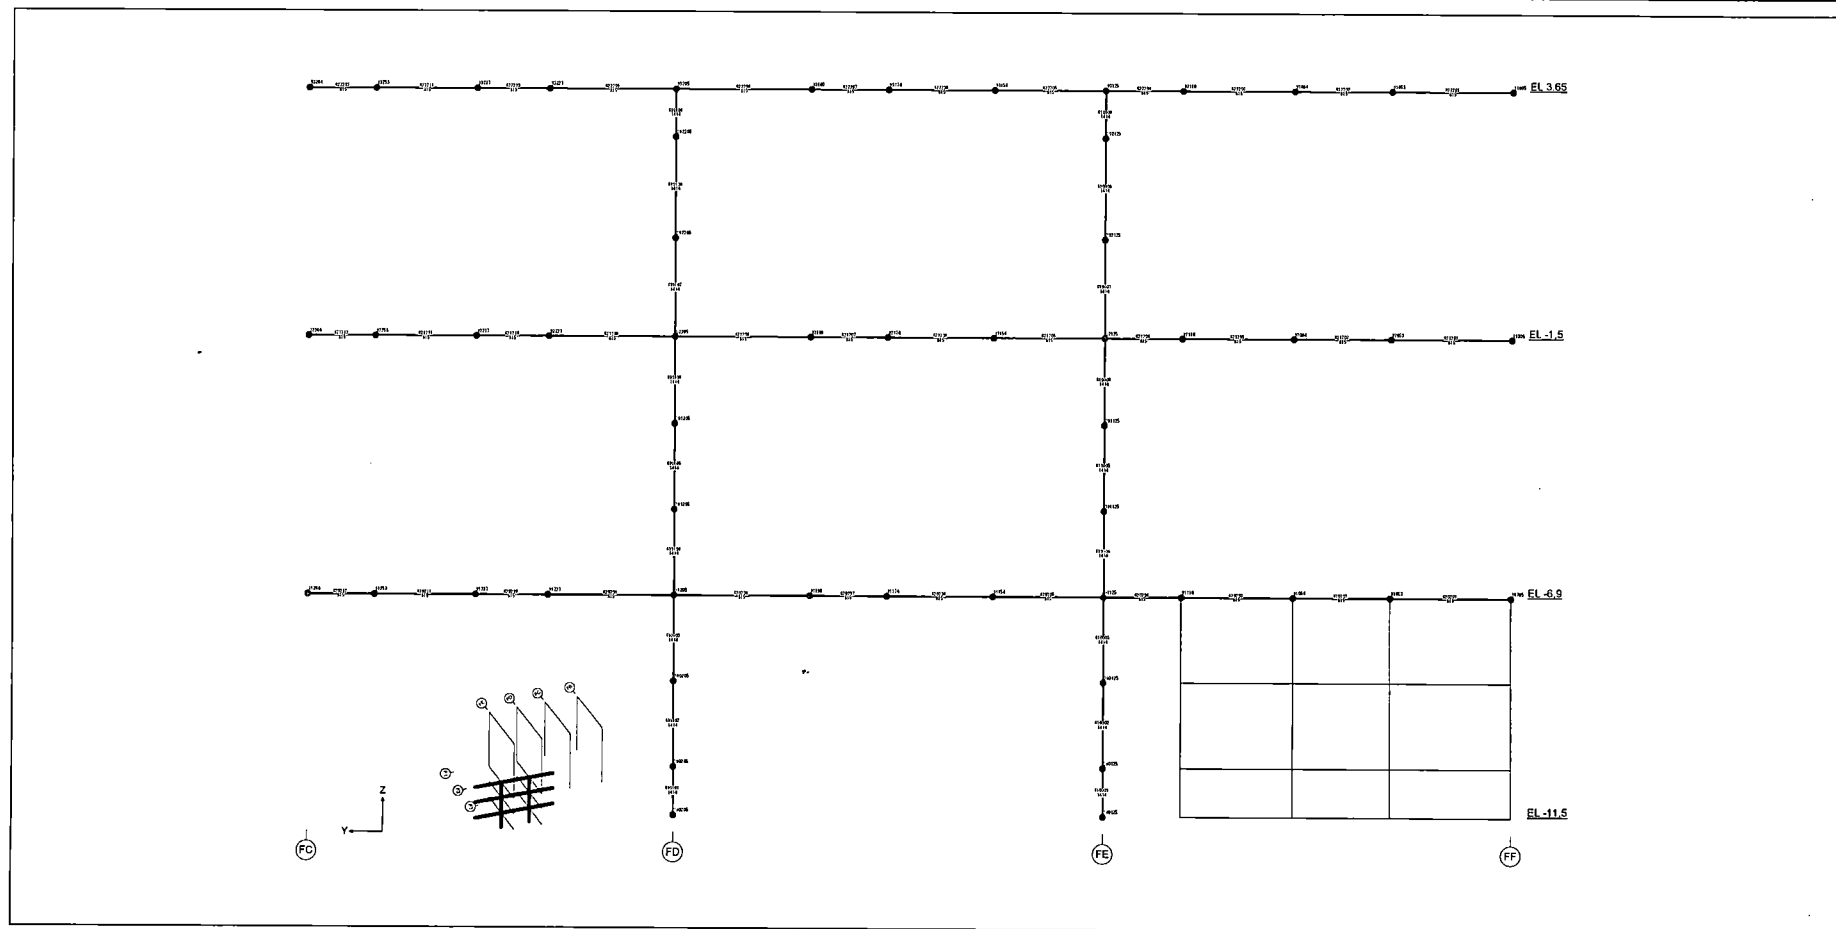


Figure 6.2.2-35 FE Model of the FB Frame (F2 Column Line)

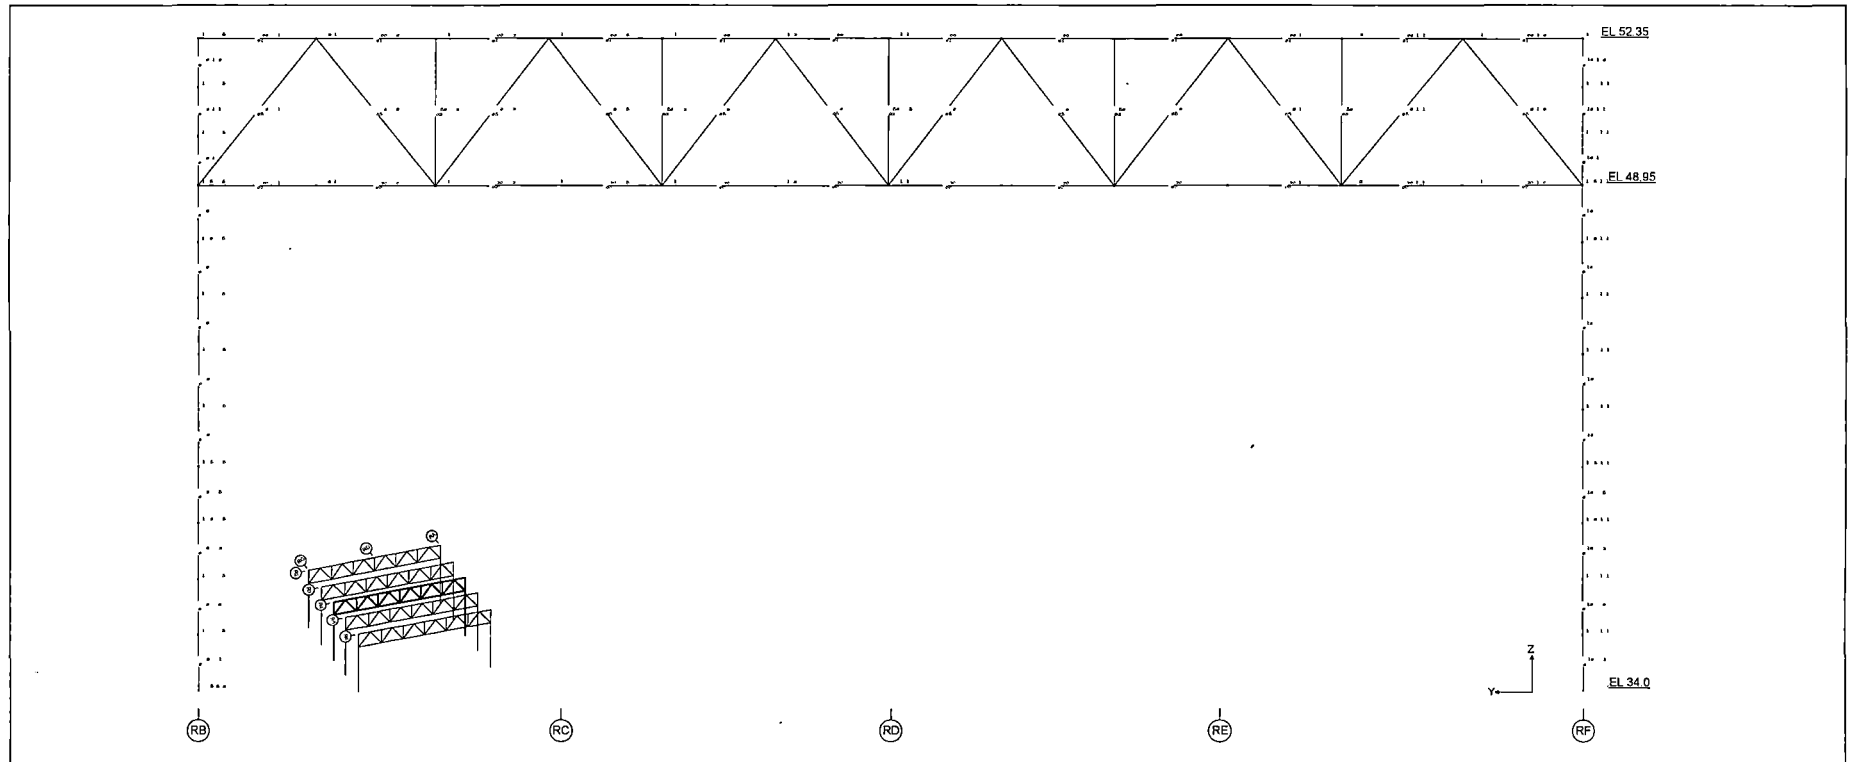


Figure 6.2.2-36 FE Model of the Roof Truss (R4 Column Line)



HITACHI

WG3-U71-ERD-S-0004 SH NO. 294

REV. 2

of 543

{

}

Figure 6.2.3.1-1 Equipment Loads at EL -11,500

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004 SH NO. 295

REV. 2

of 543

{

}

Figure 6.2.3.1-2 Equipment Loads at EL -6,400

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004 SH NO. 296

REV. 2

of 543

{

}

Figure 6.2.3.1-3 Equipment Loads at EL -1,000

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004 SH NO. 297

REV. 2

of 543

{

}

Figure 6.2.3.1-4 Equipment Loads at EL 4,650

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004 SH NO. 298

REV. 2

of 543

{

}

Figure 6.2.3.1-5 Equipment Loads at EL 9,060

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004 SH NO. 299

REV. 2

of 543

{

}

Figure 6.2.3.1-6 Equipment Loads at EL 13,570

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004 SH NO. 300

REV. 2

of 543

{

}

Figure 6.2.3.1-7 Equipment Loads at EL 22,500

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004 SH NO. 301

REV. 2

of 543

{

}

Figure 6.2.3.1-8 Equipment Loads at EL 27,000

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004 SH NO. 302

REV. 2

of 543

{

}

Figure 6.2.3.1-9 Equipment Loads at EL 34,000

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004 SH NO. 303

REV. 2

of 543

{

}

Figure 6.2.3.1-10 Equipment Loads above EL 34,000

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004 SH NO. 304

REV. 2

of 543

{

}

Figure 6.2.3.1-11 Hydrostatic Loads on the Basemat

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004 SH NO. 305

REV. 2 of 543

{

}

Figure 6.2.3.1-12 Hydrostatic Loads on the Slab at EL -1,000

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004 SH NO. 306

REV. 2

of 543

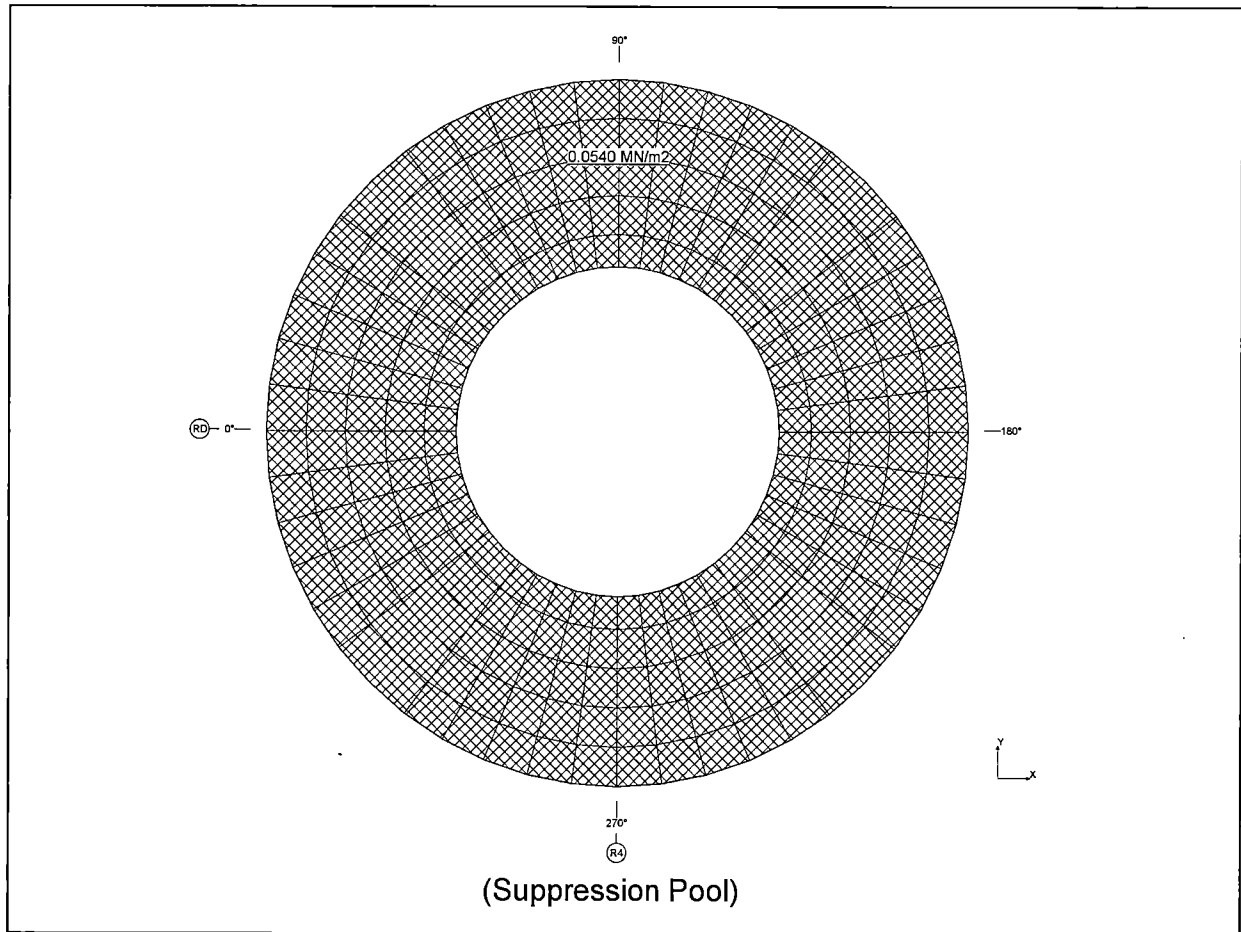


Figure 6.2.3.1-13 Hydrostatic Loads on the Suppression Pool Floor Liner



HITACHI

WG3-U71-ERD-S-0004	SH NO. 307
REV. 2	of 543

{

}

Figure 6.2.3.1-14 Hydrostatic Loads on the Slab at EL 27,000

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}

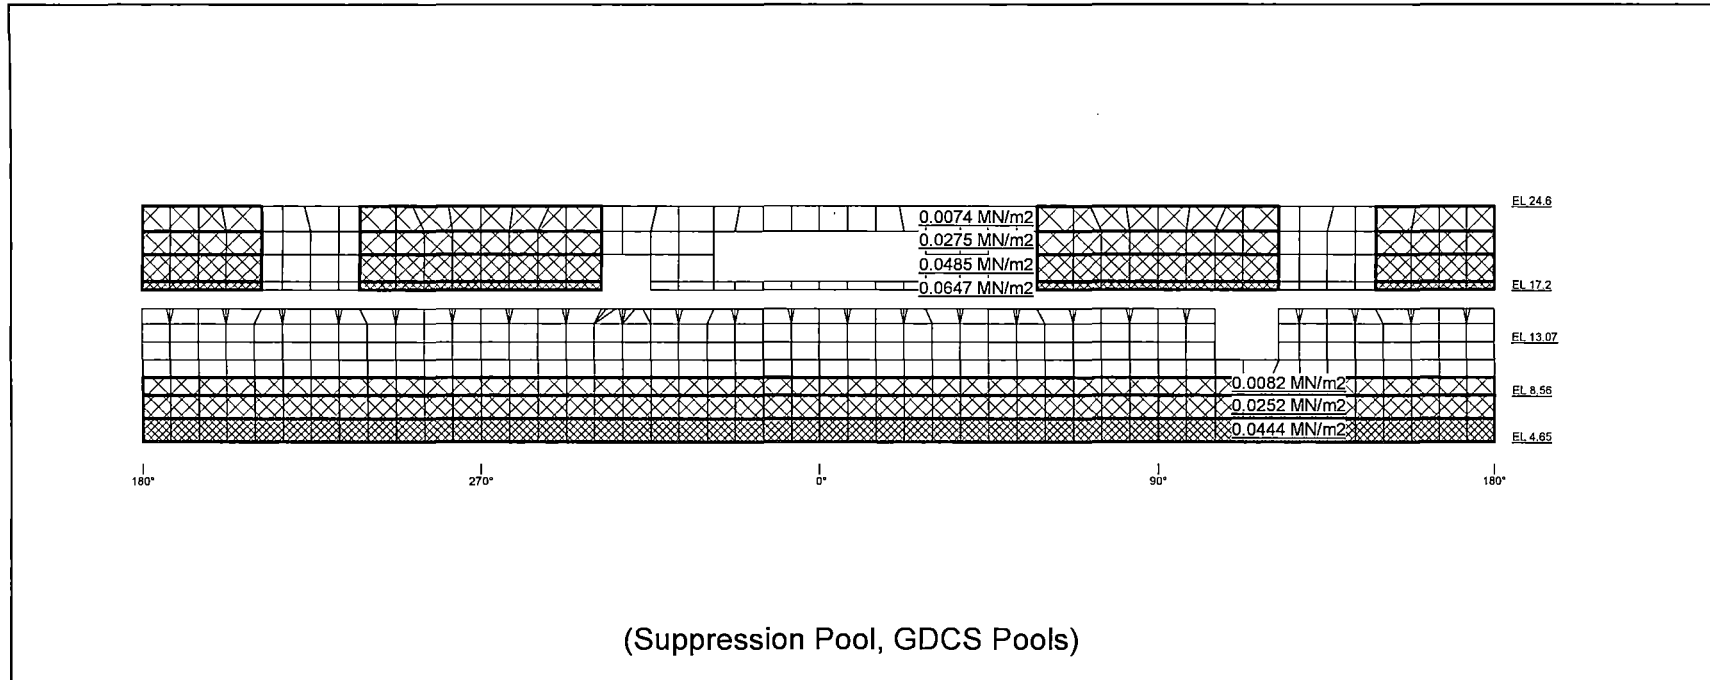


Figure 6.2.3.1-15 Hydrostatic Loads on the RCCV Wall Liner



HITACHI

WG3-U71-ERD-S-0004

SH NO. 309

REV. 2

of 543

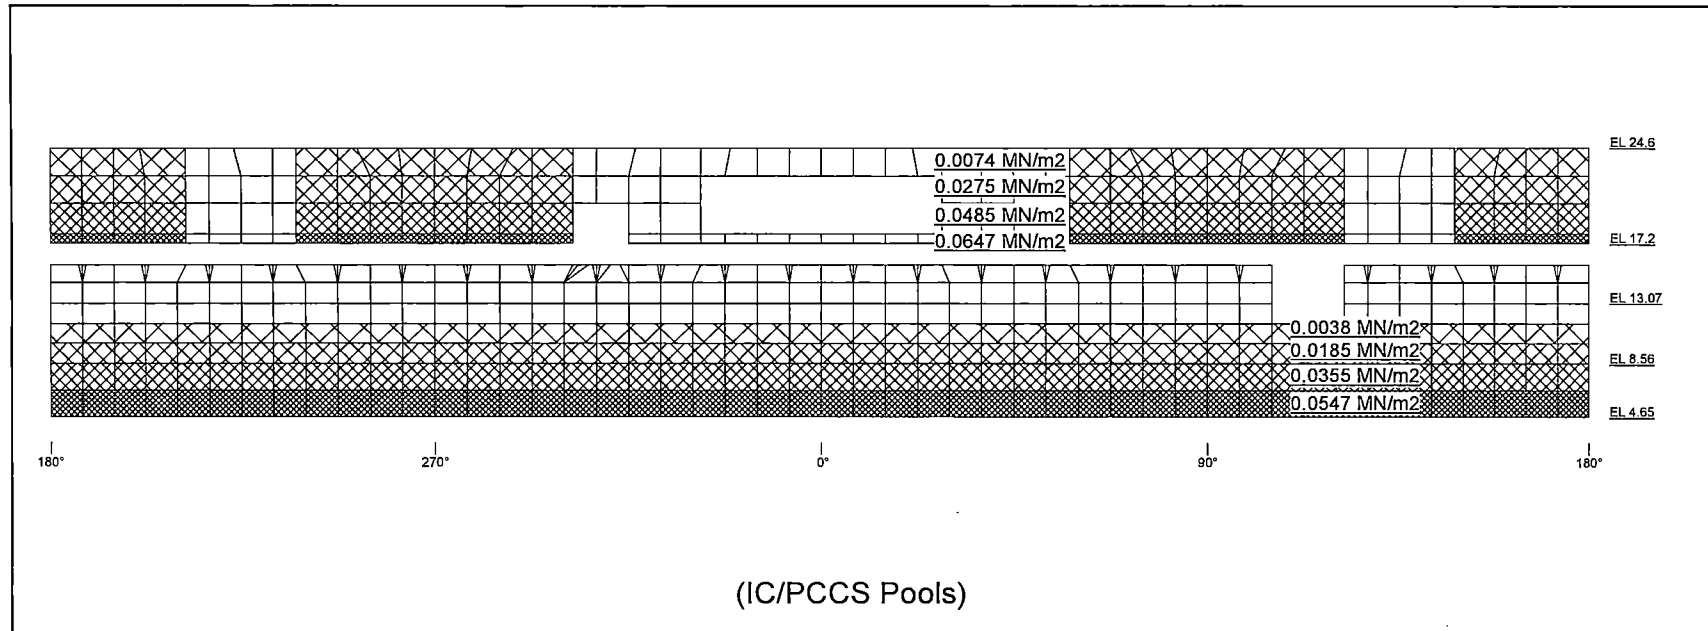


Figure 6.2.3.1-16 Hydrostatic Loads during LOCA Flooding on the RPV Pedestal Liner



HITACHI

WG3-U71-ERD-S-0004

SH NO. 310

REV. 2

of 543

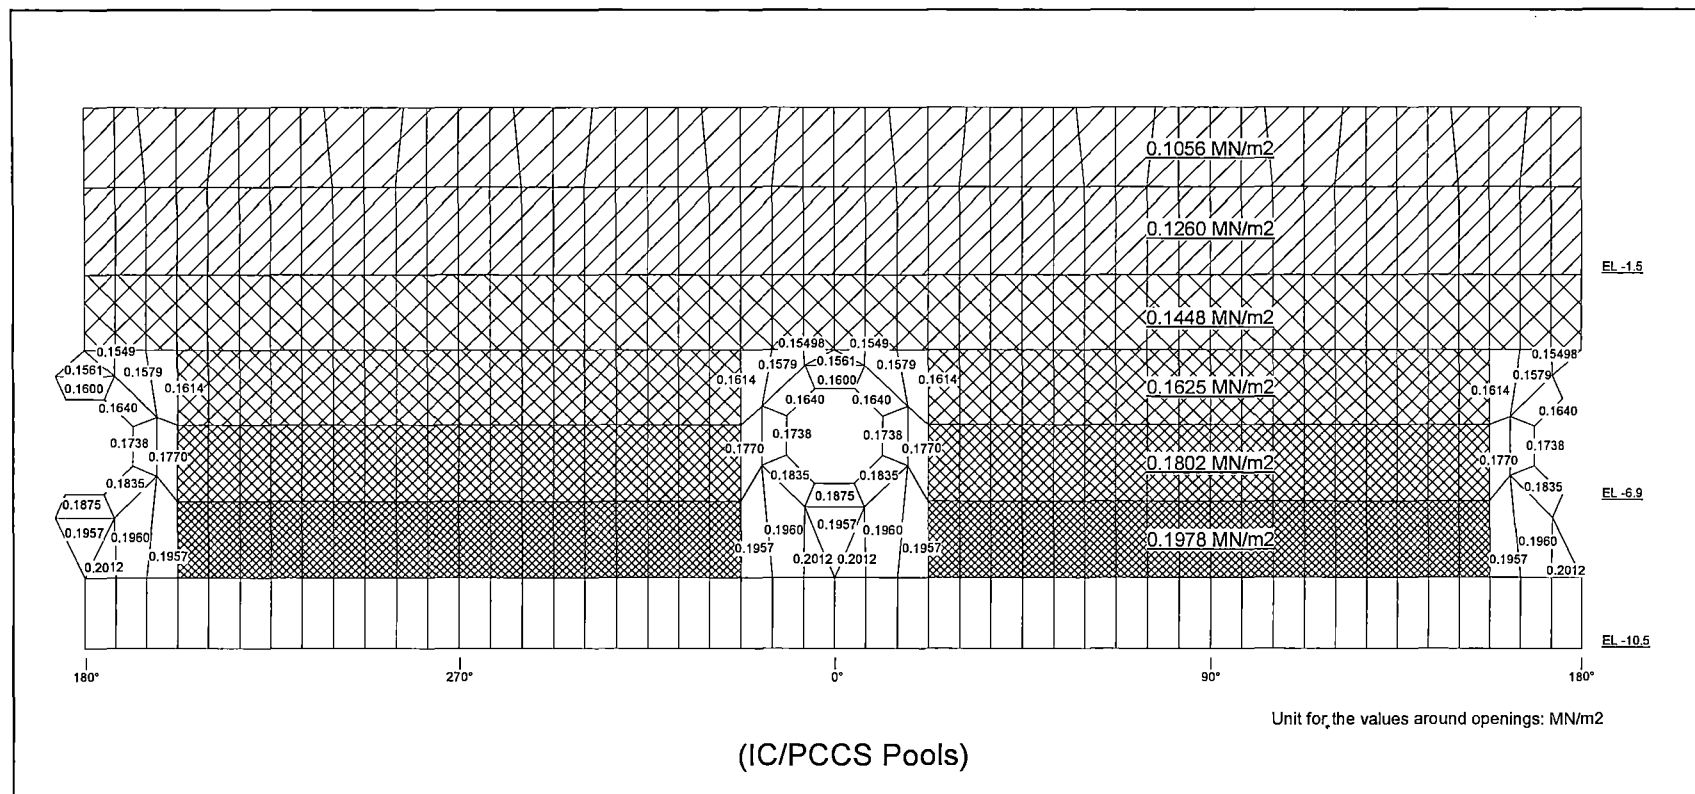


Figure 6.2.3.1-17 Hydrostatic Loads during LOCA Flooding on the RCCV Liner

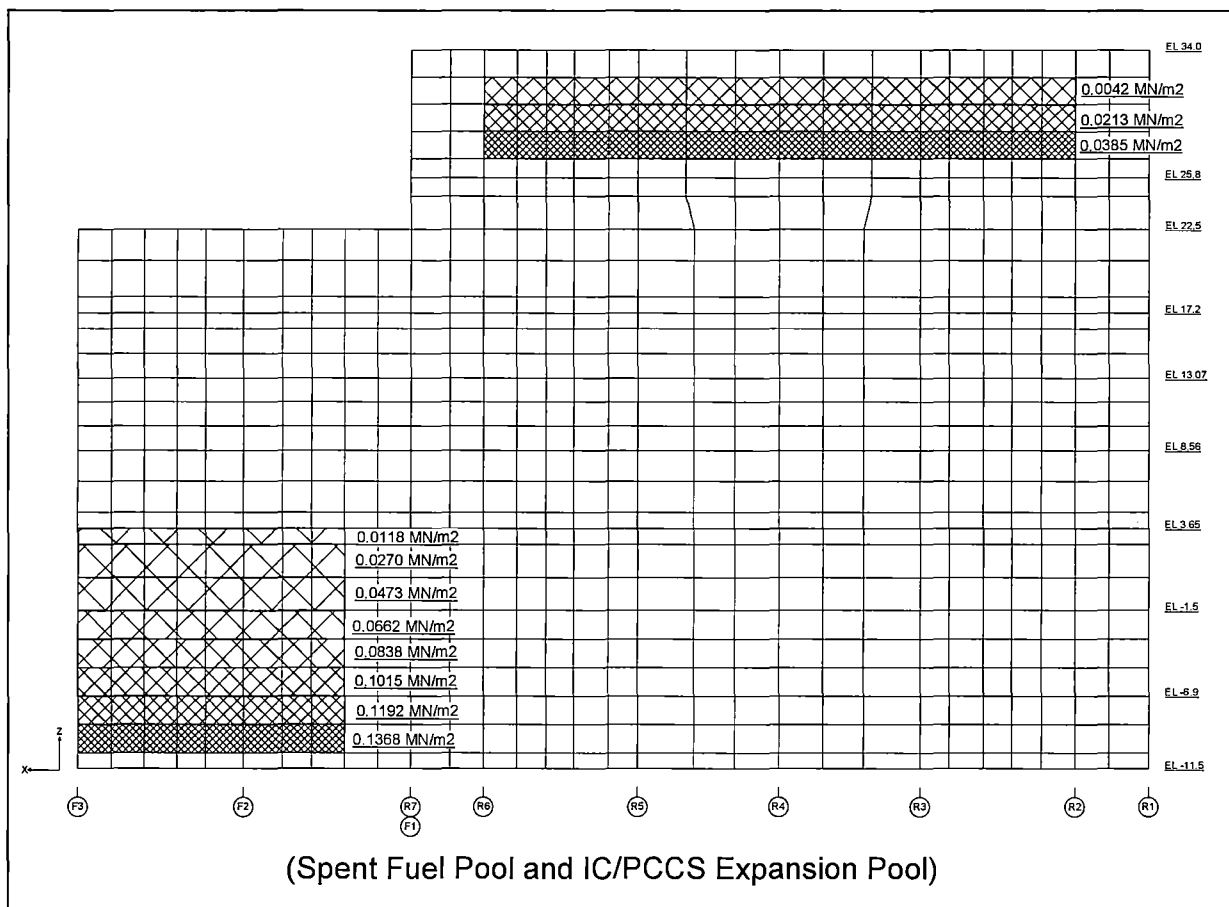


Figure 6.2.3.1-18 Hydrostatic Loads on the RA FA External Wall



HITACHI

WG3-U71-ERD-S-0004 SH NO. 312

REV. 2

of 543

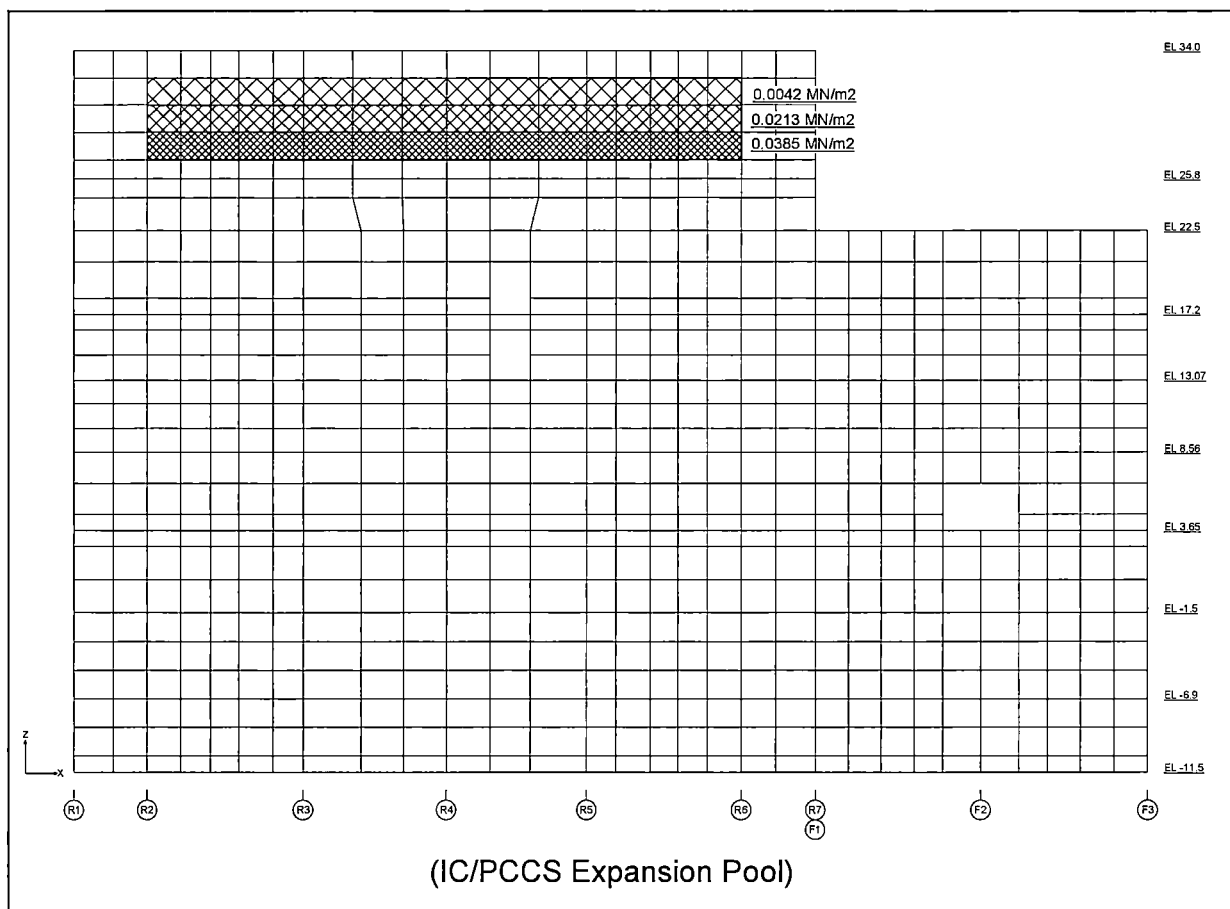


Figure 6.2.3.1-19 Hydrostatic Loads on the RG/FF External Wall

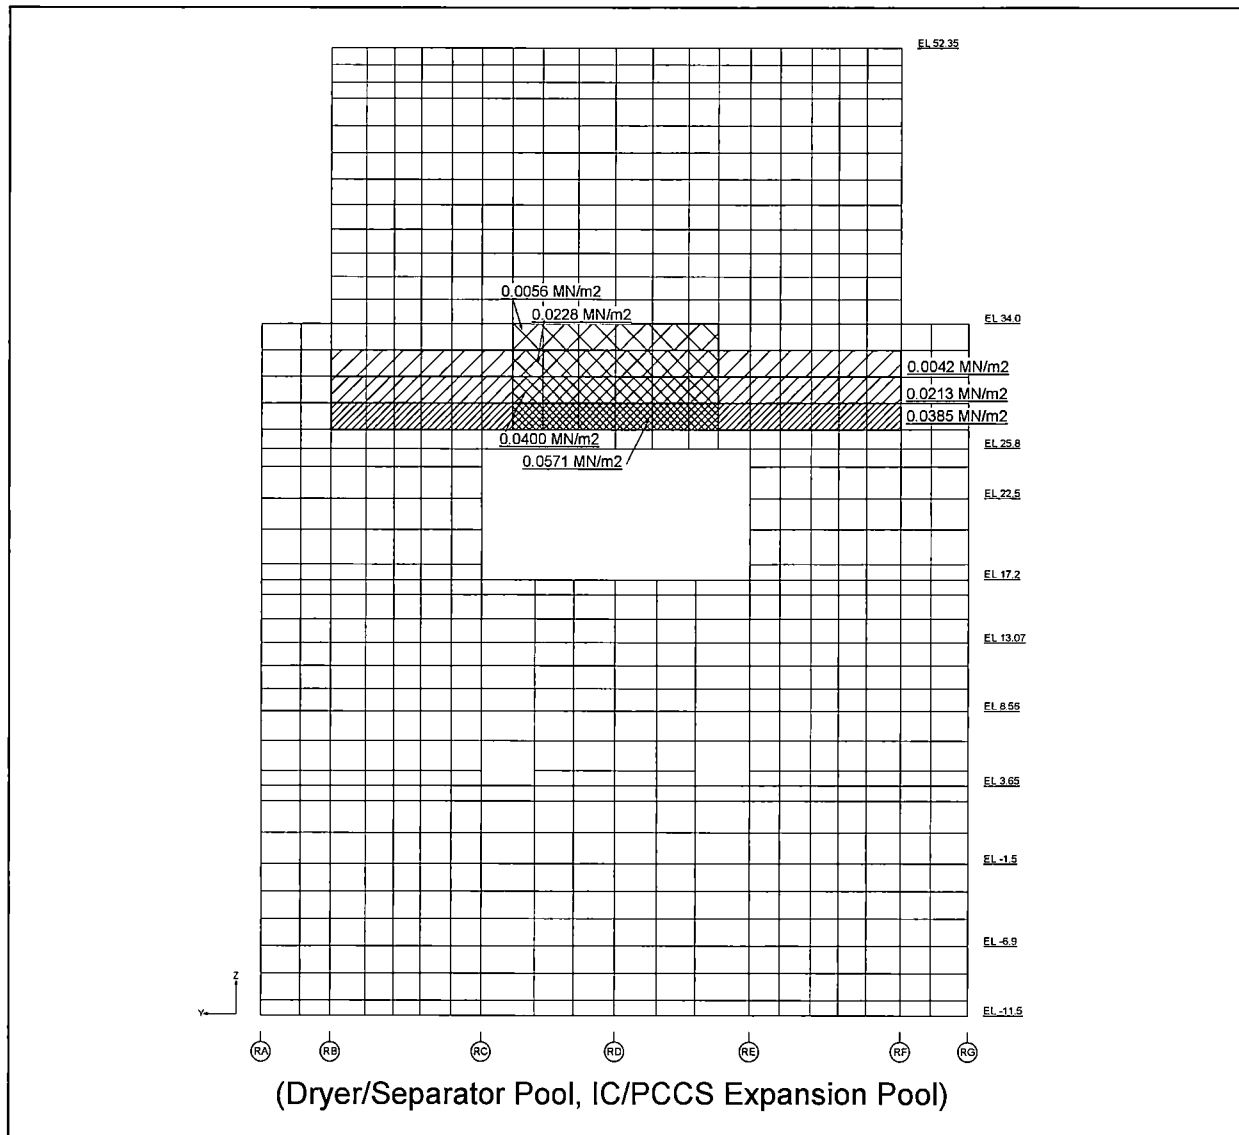


Figure 6.2.3.1-20 Hydrostatic Loads on the R1 External Wall

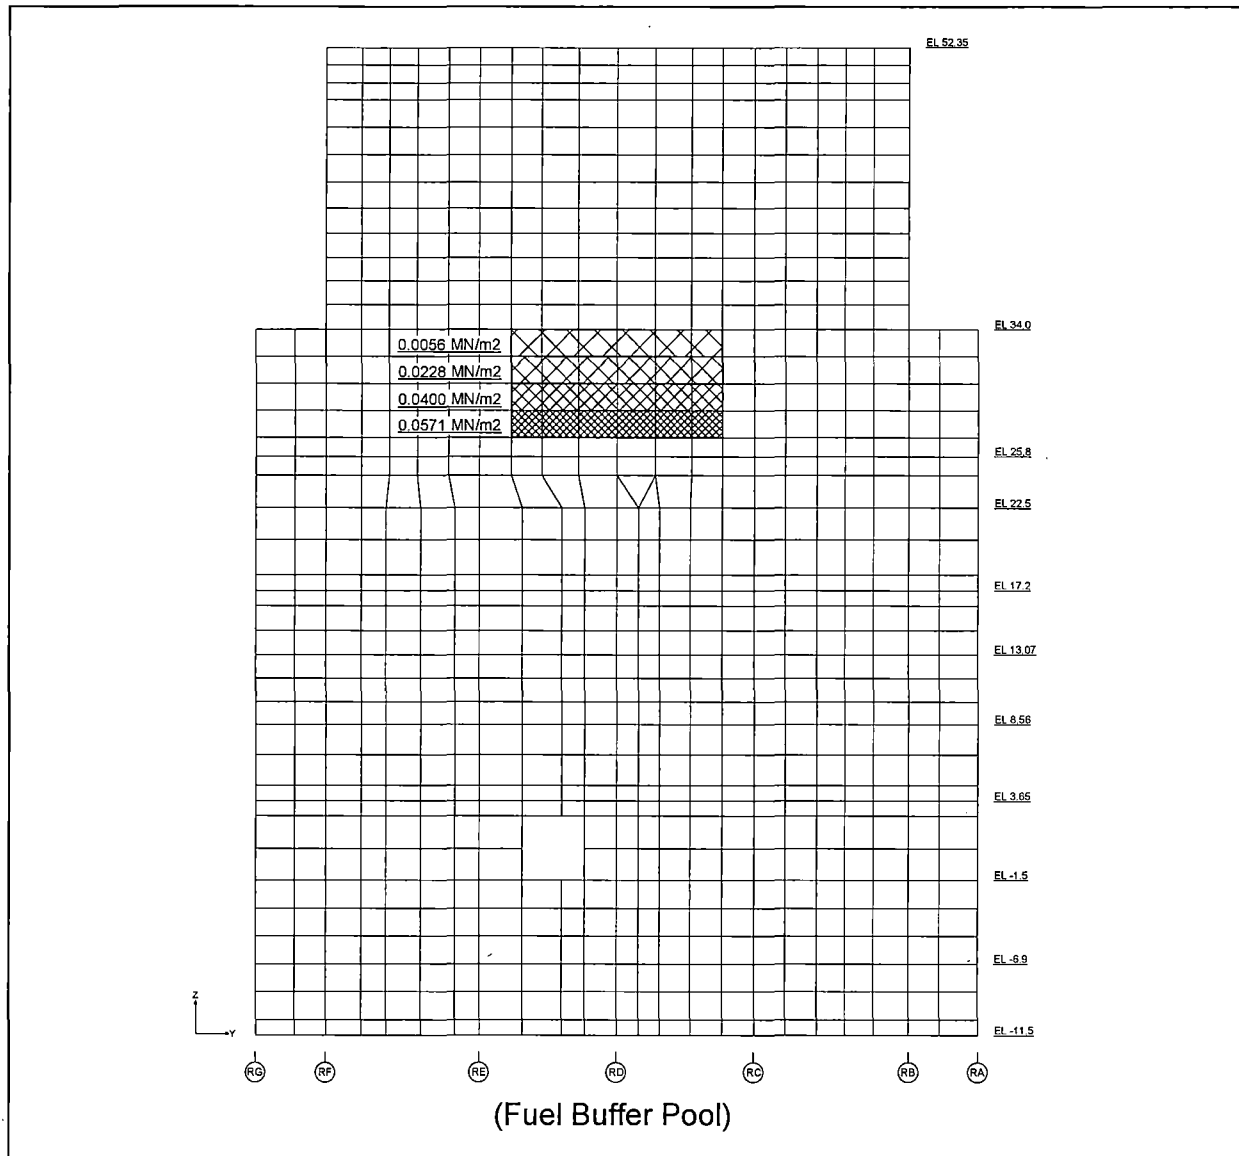


Figure 6.2.3.1-21 Hydrostatic Loads on the R7/F1 External Wall



HITACHI

WG3-U71-ERD-S-0004 SH NO. 315

REV. 2

of 543

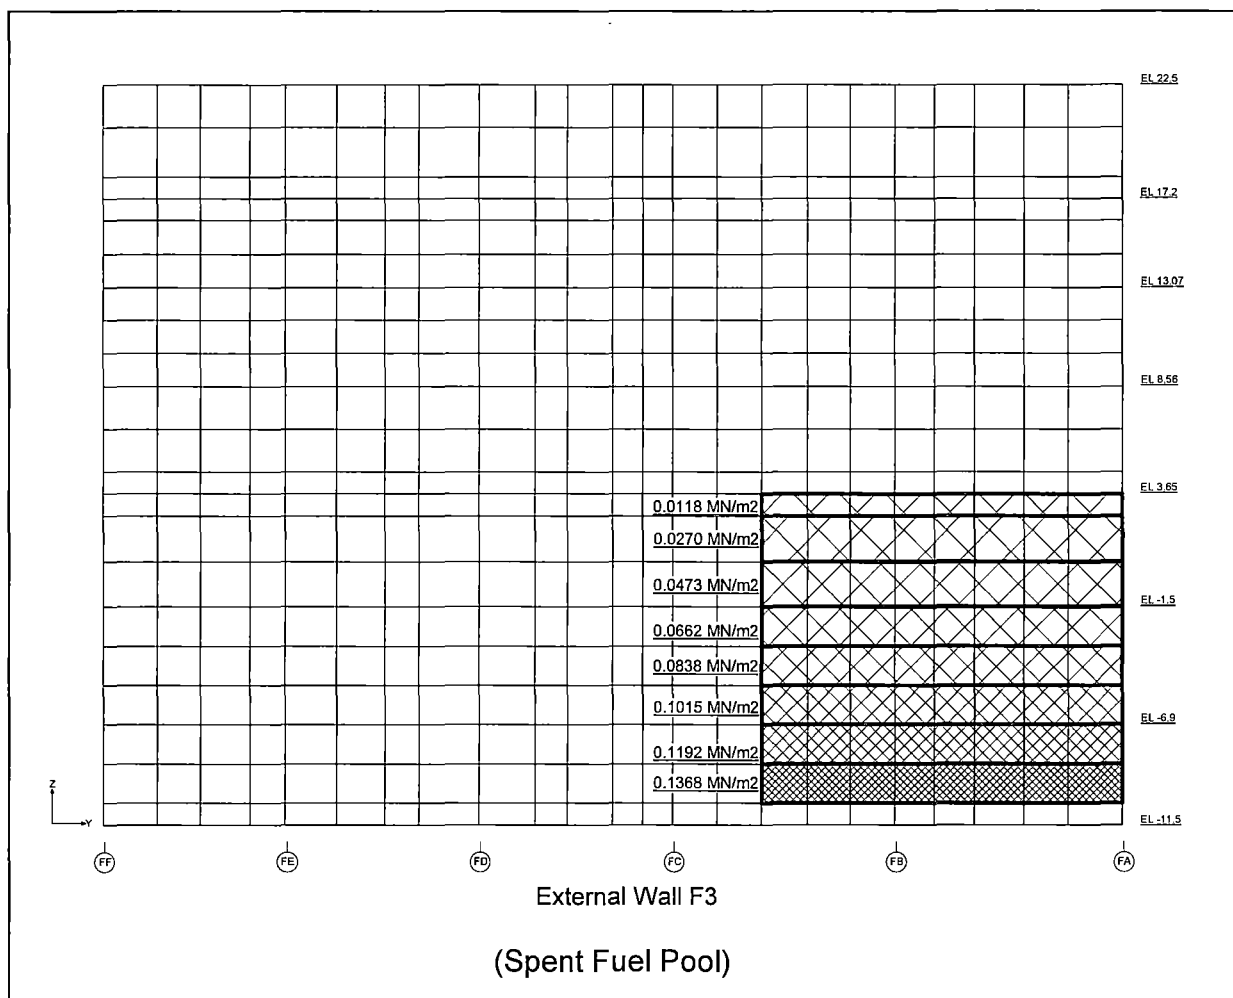


Figure 6.2.3.1-22 Hydrostatic Loads on the F3 External Wall

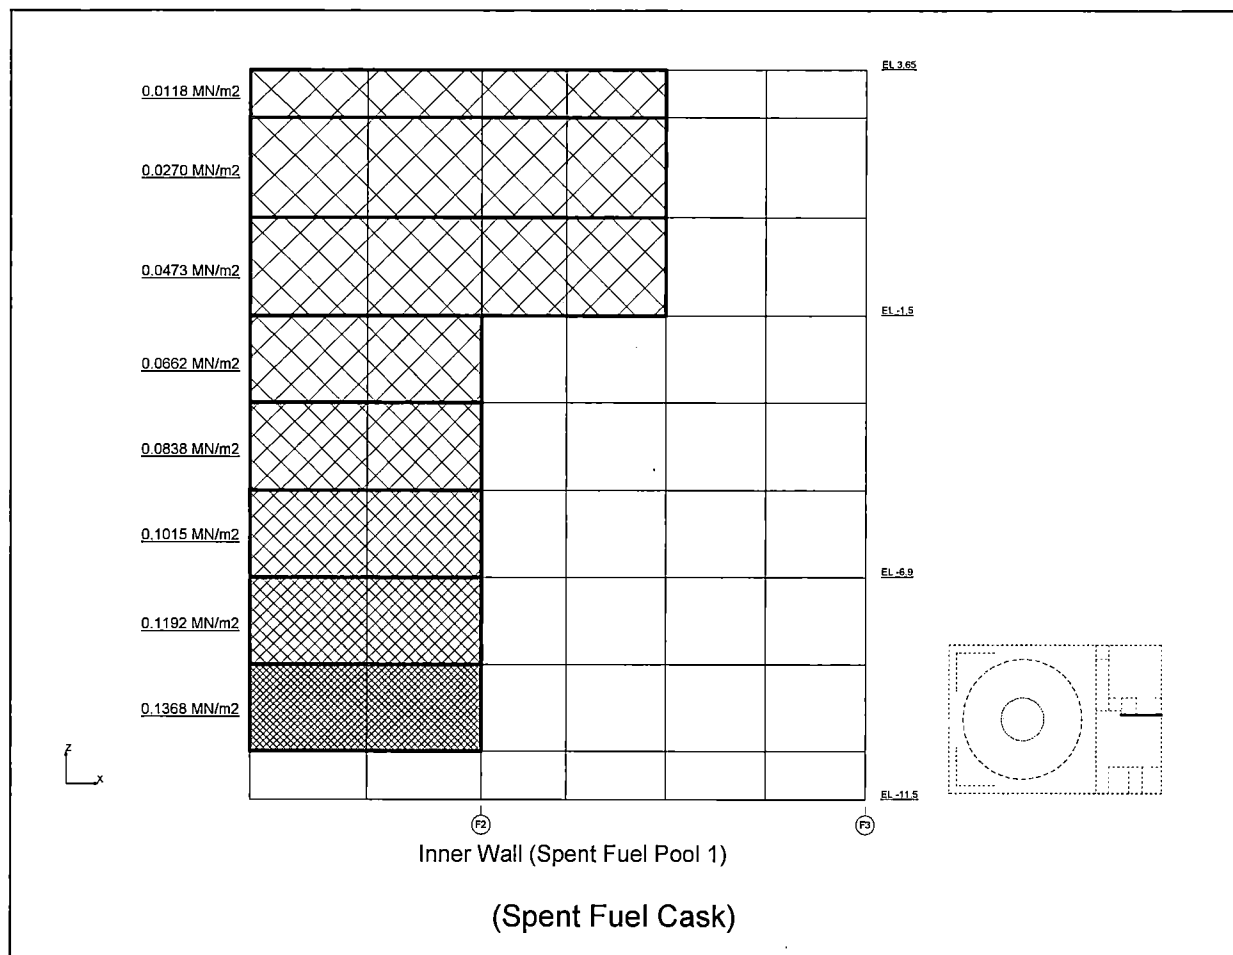


Figure 6.2.3.1-23 Hydrostatic Loads on the Inner Wall at EL -11,500 (1)

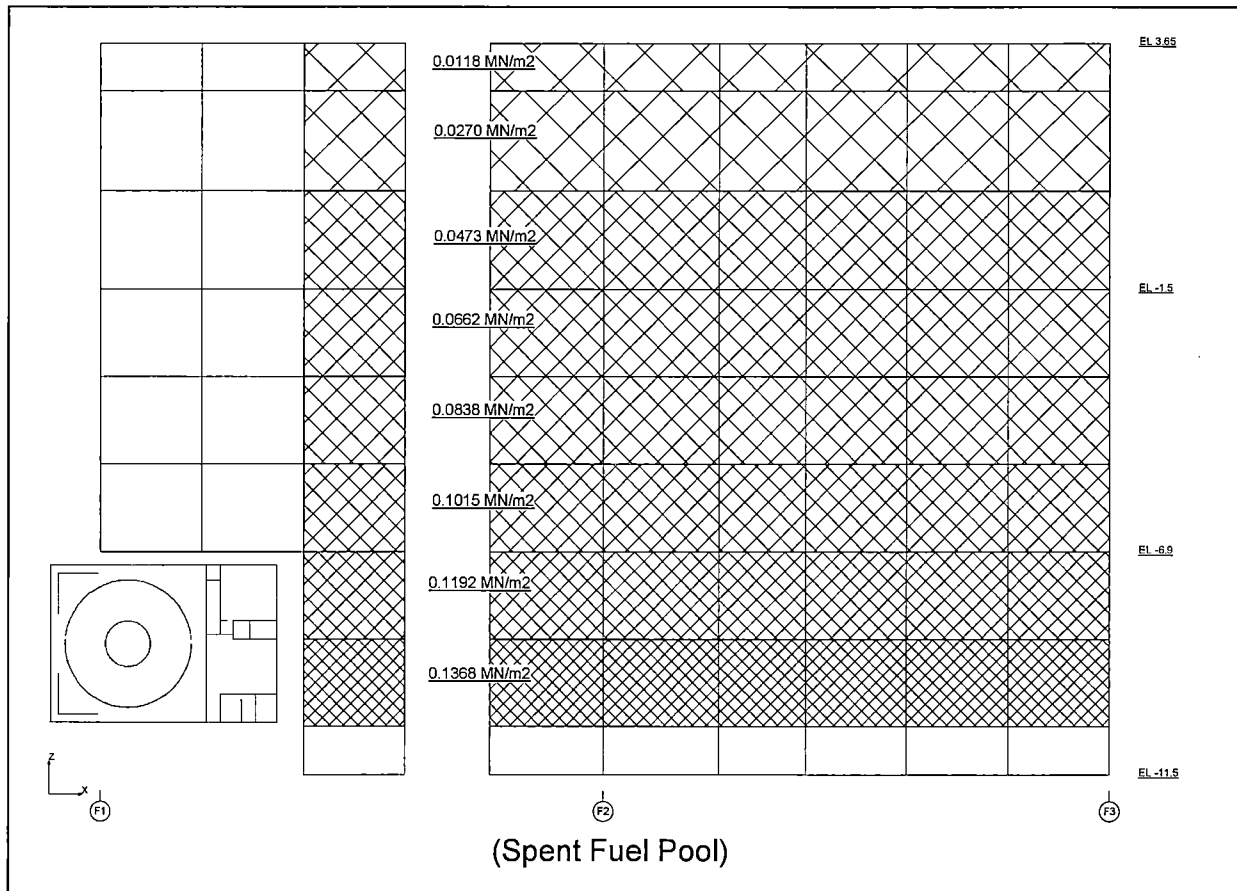


Figure 6.2.3.1-24 Hydrostatic Loads on the Inner Wall at EL -11,500 (2)



HITACHI

WG3-U71-ERD-S-0004 SH NO. 318

REV. 2

of 543

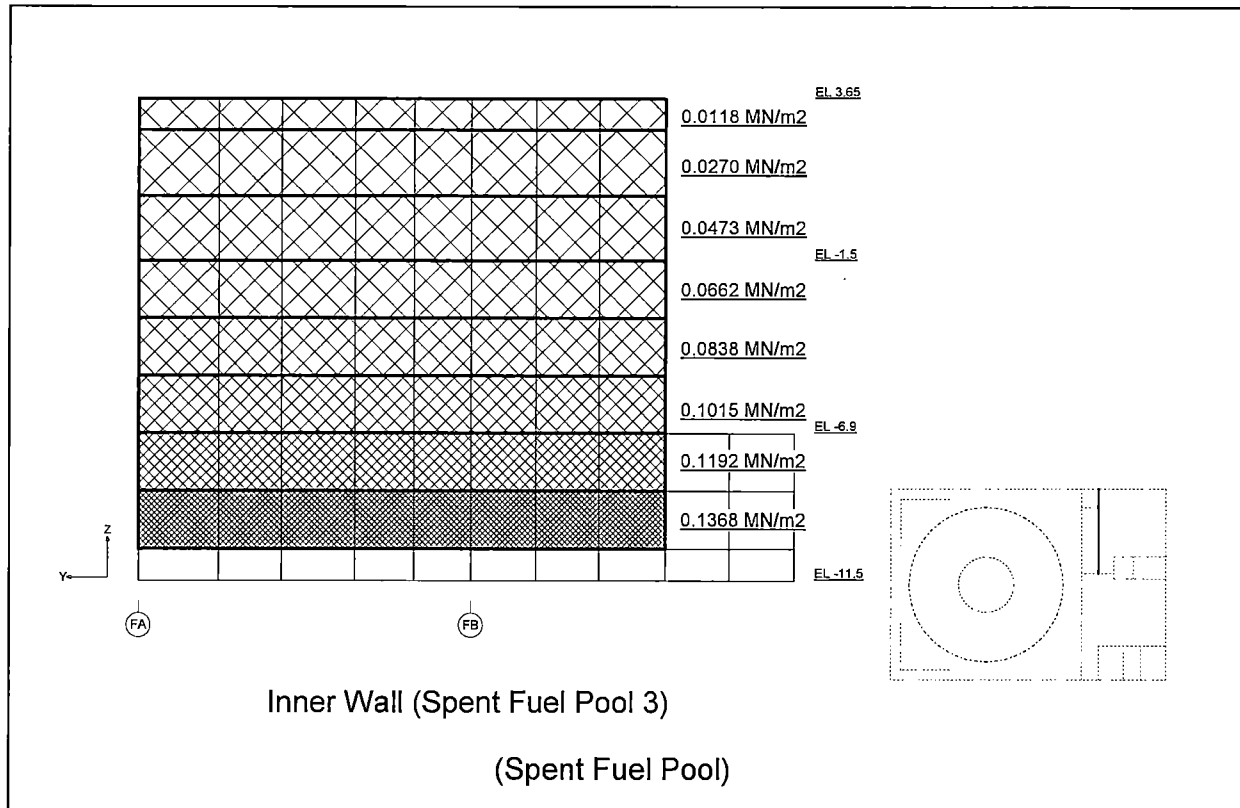


Figure 6.2.3.1-25 Hydrostatic Loads on the Inner Wall at EL -11,500 (3)

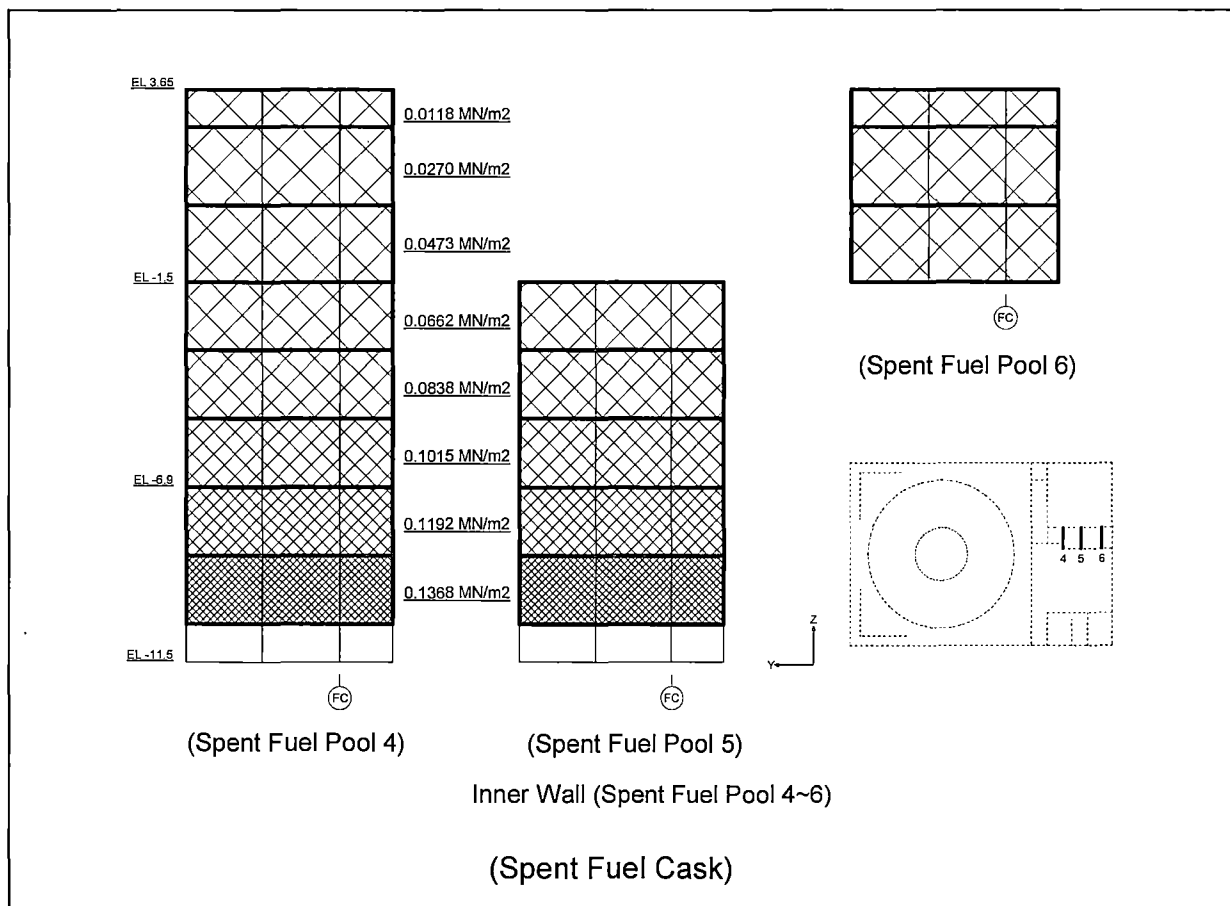


Figure 6.2.3.1-26 Hydrostatic Loads on the Inner Wall at EL -11,500 (4)

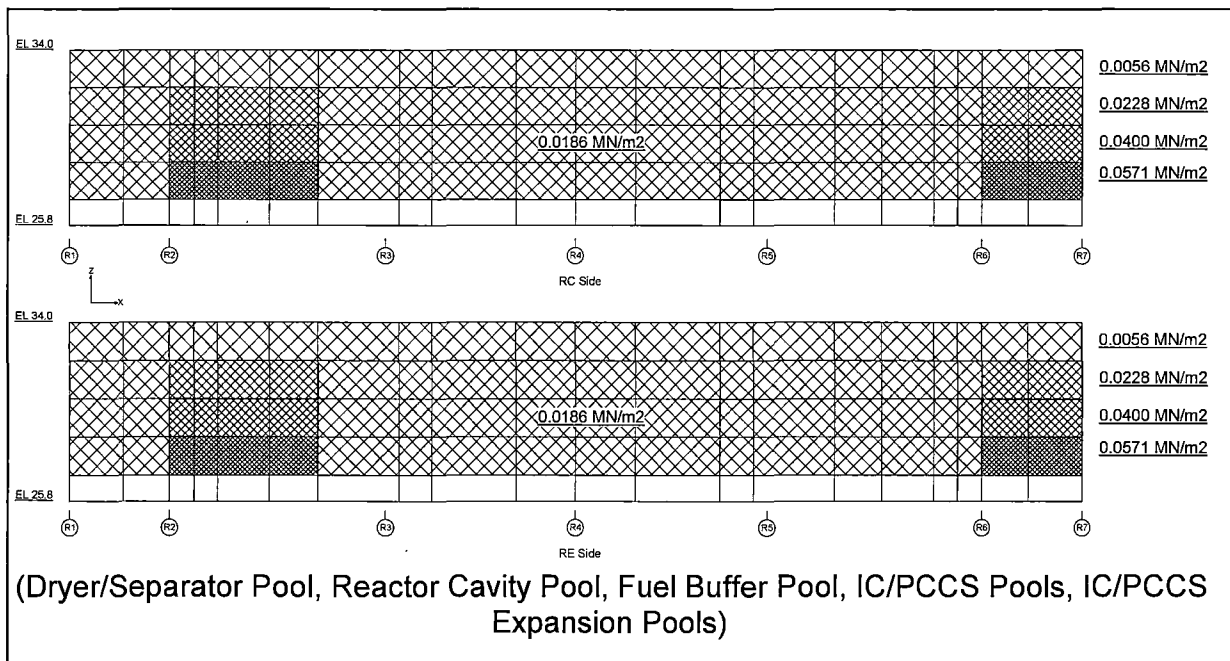


Figure 6.2.3.1-27 Hydrostatic Loads on the Pool Girder



HITACHI

WG3-U71-ERD-S-0004 SH NO. 321

REV. 2

of 543

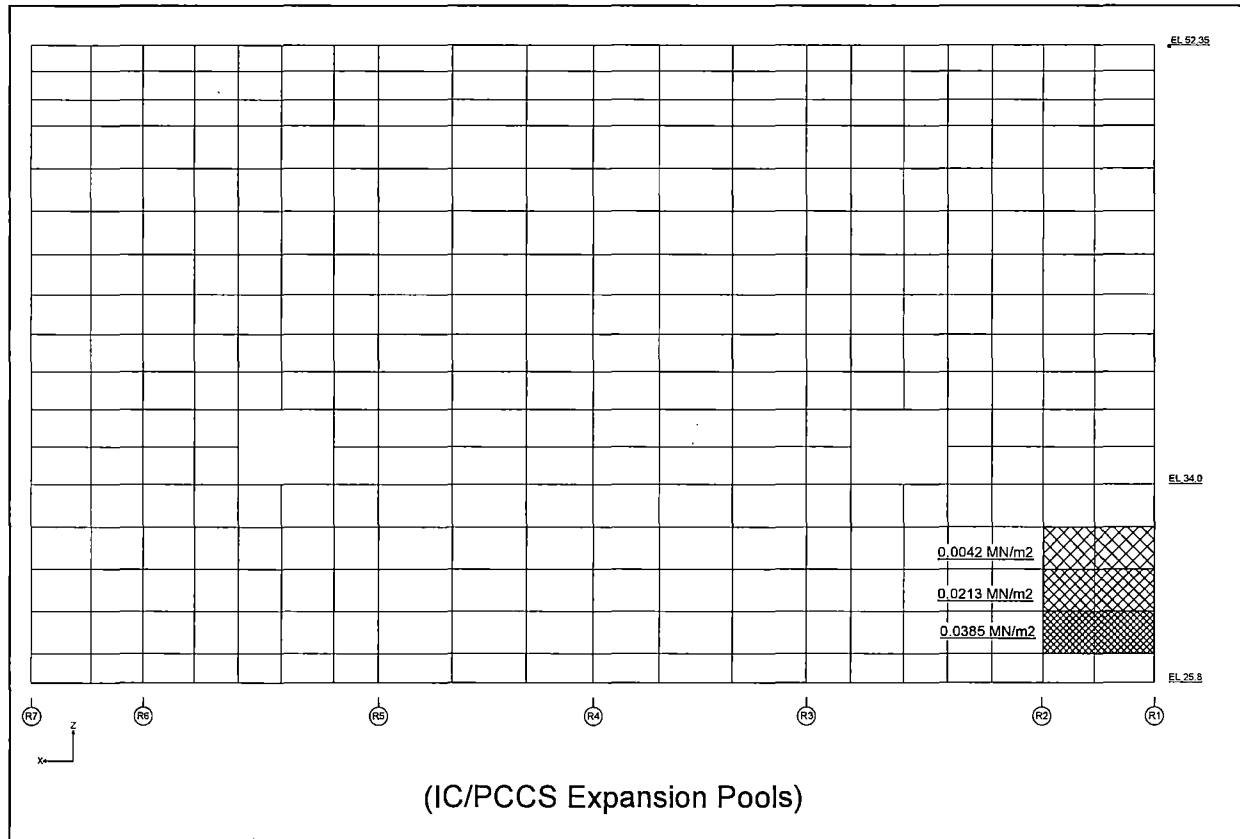


Figure 6.2.3.1-28 Hydrostatic Loads on the Inner Wall at EL 27,000 (RB)



HITACHI

WG3-U71-ERD-S-0004 SH NO. 322

REV. 2 of 543

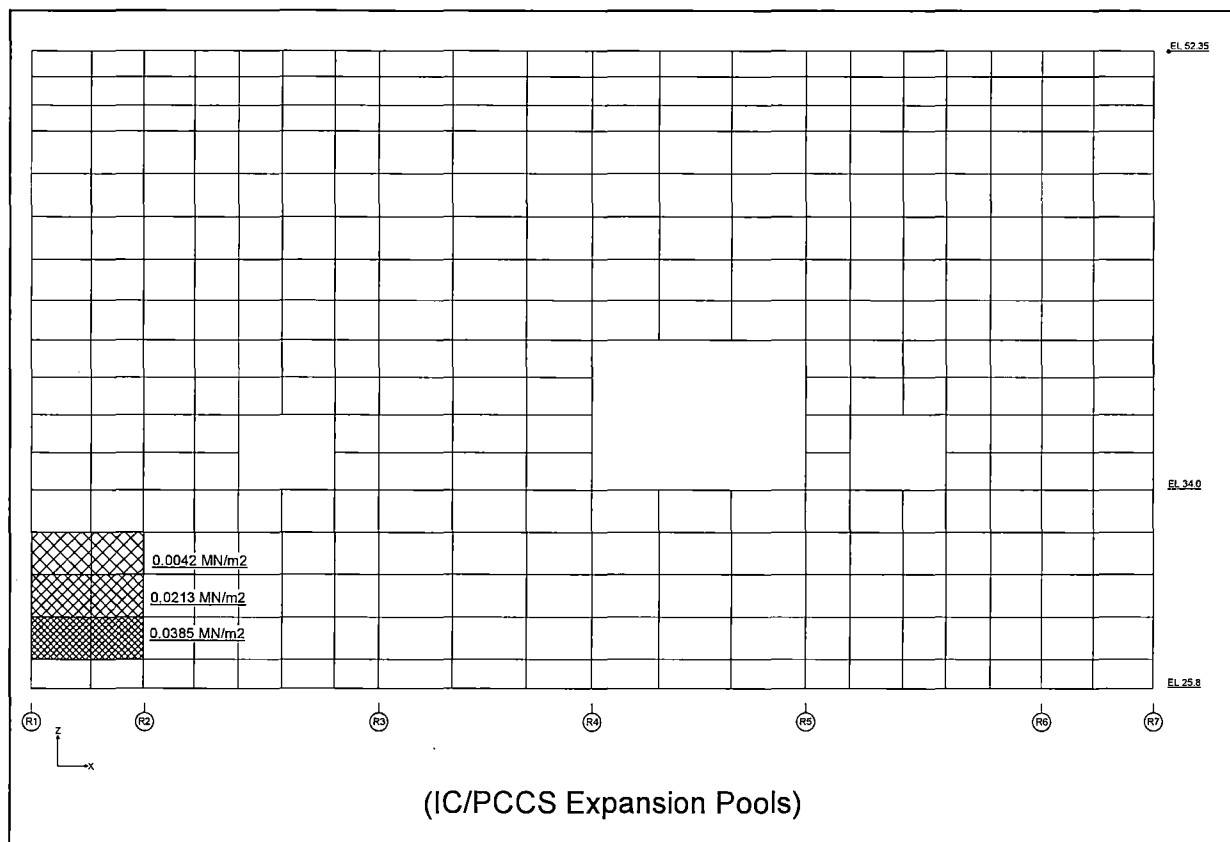


Figure 6.2.3.1-29 Hydrostatic Loads on the Inner Wall at EL 27,000 (RF)

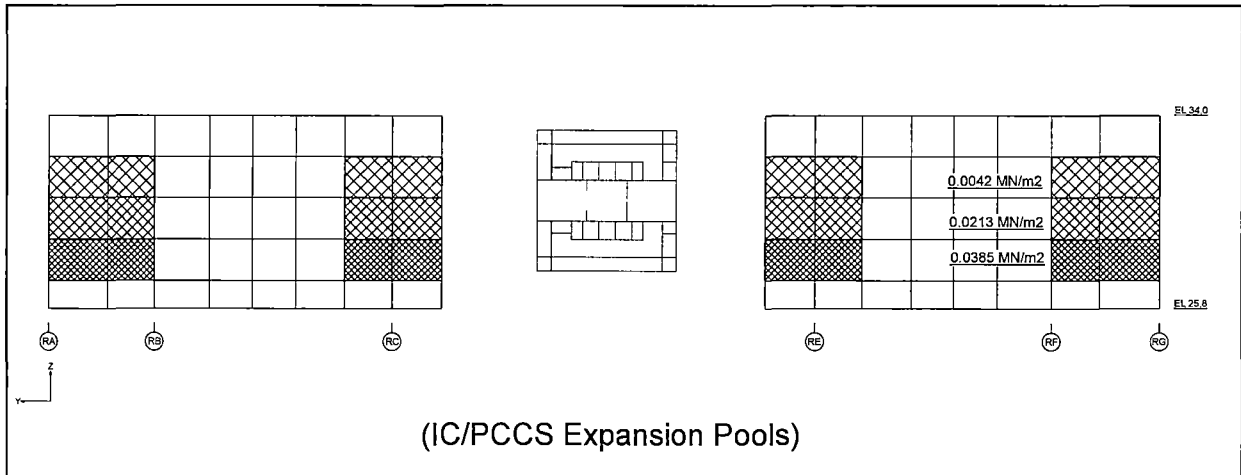


Figure 6.2.3.1-30 Hydrostatic Loads on the Inner Wall at EL 27,000 (R2)

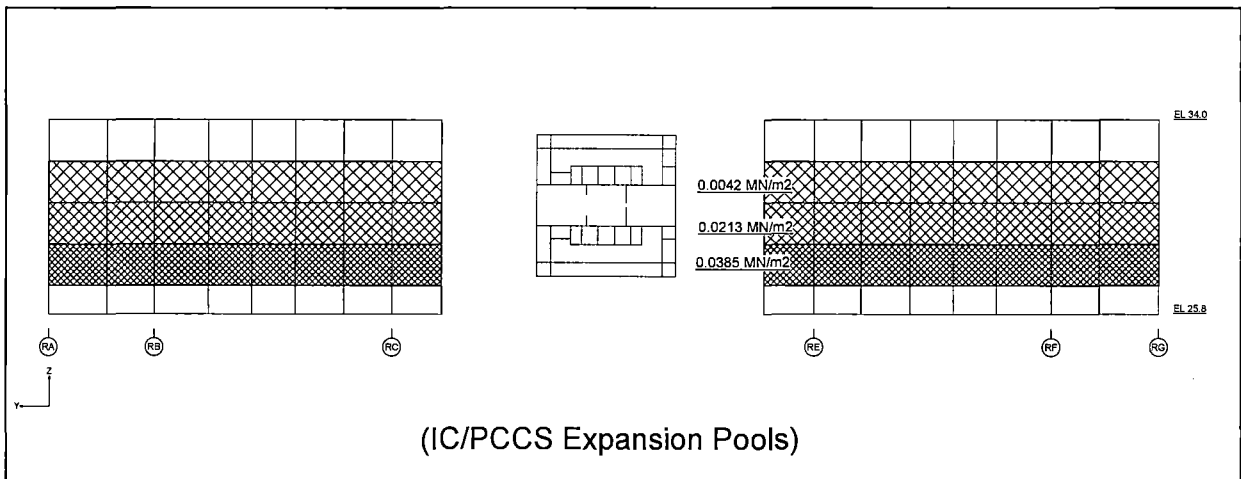


Figure 6.2.3.1-31 Hydrostatic Loads on the Inner Wall at EL 27,000 (R6)

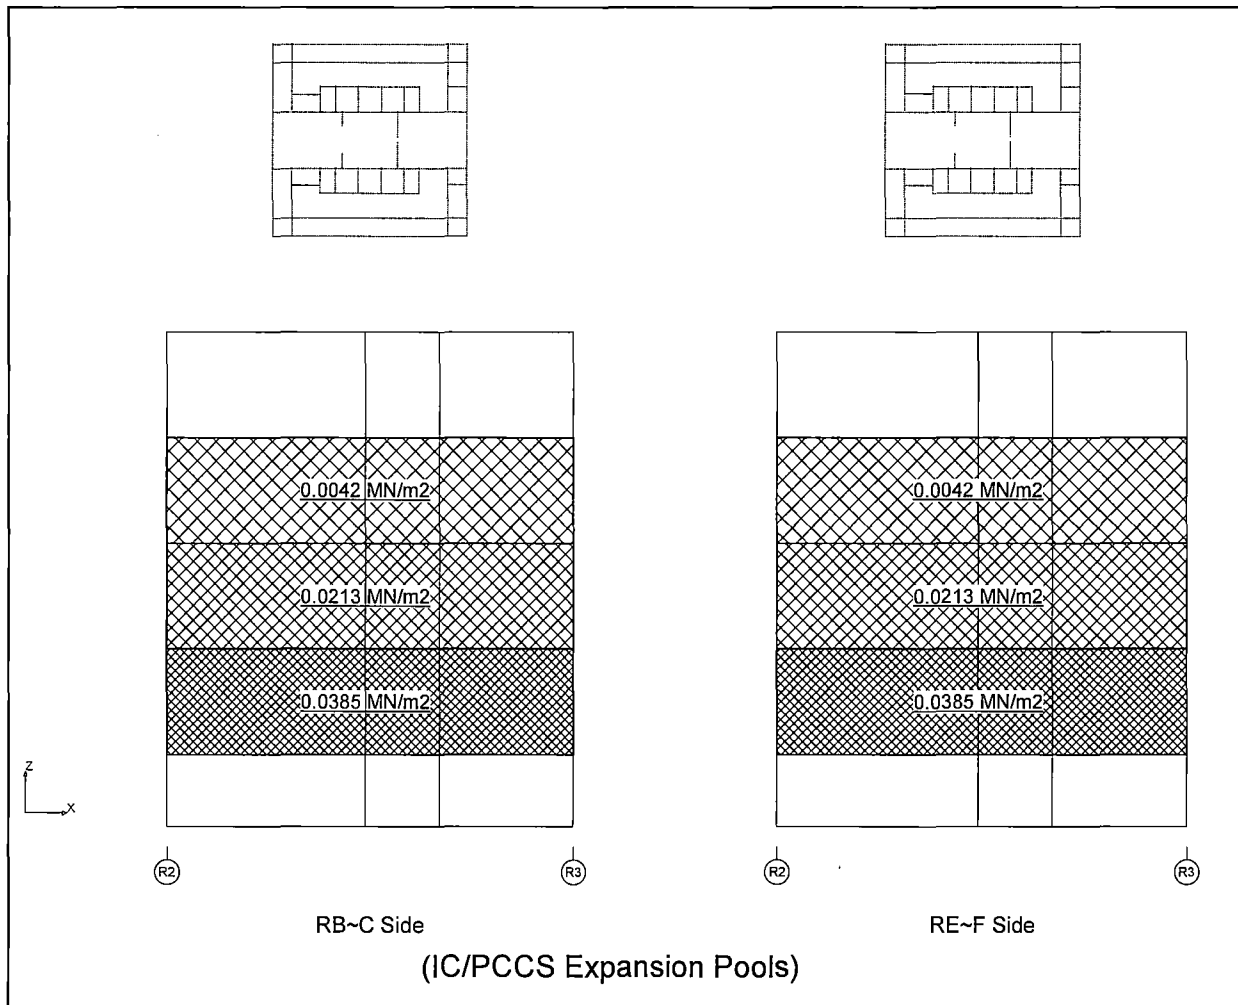


Figure 6.2.3.1-32 Hydrostatic Loads on the Inner Wall at EL 27,000 (1)

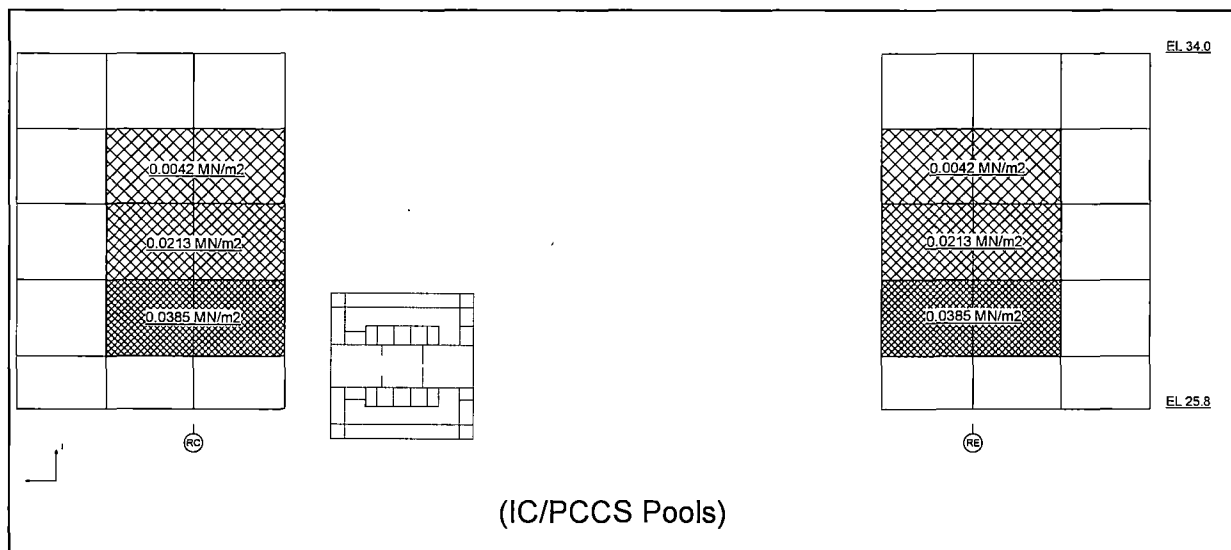


Figure 6.2.3.1-33 Hydrostatic Loads on the Inner Wall at EL 27,000 (2)



HITACHI

WG3-U71-ERD-S-0004 SH NO. 326

REV. 2

of 543

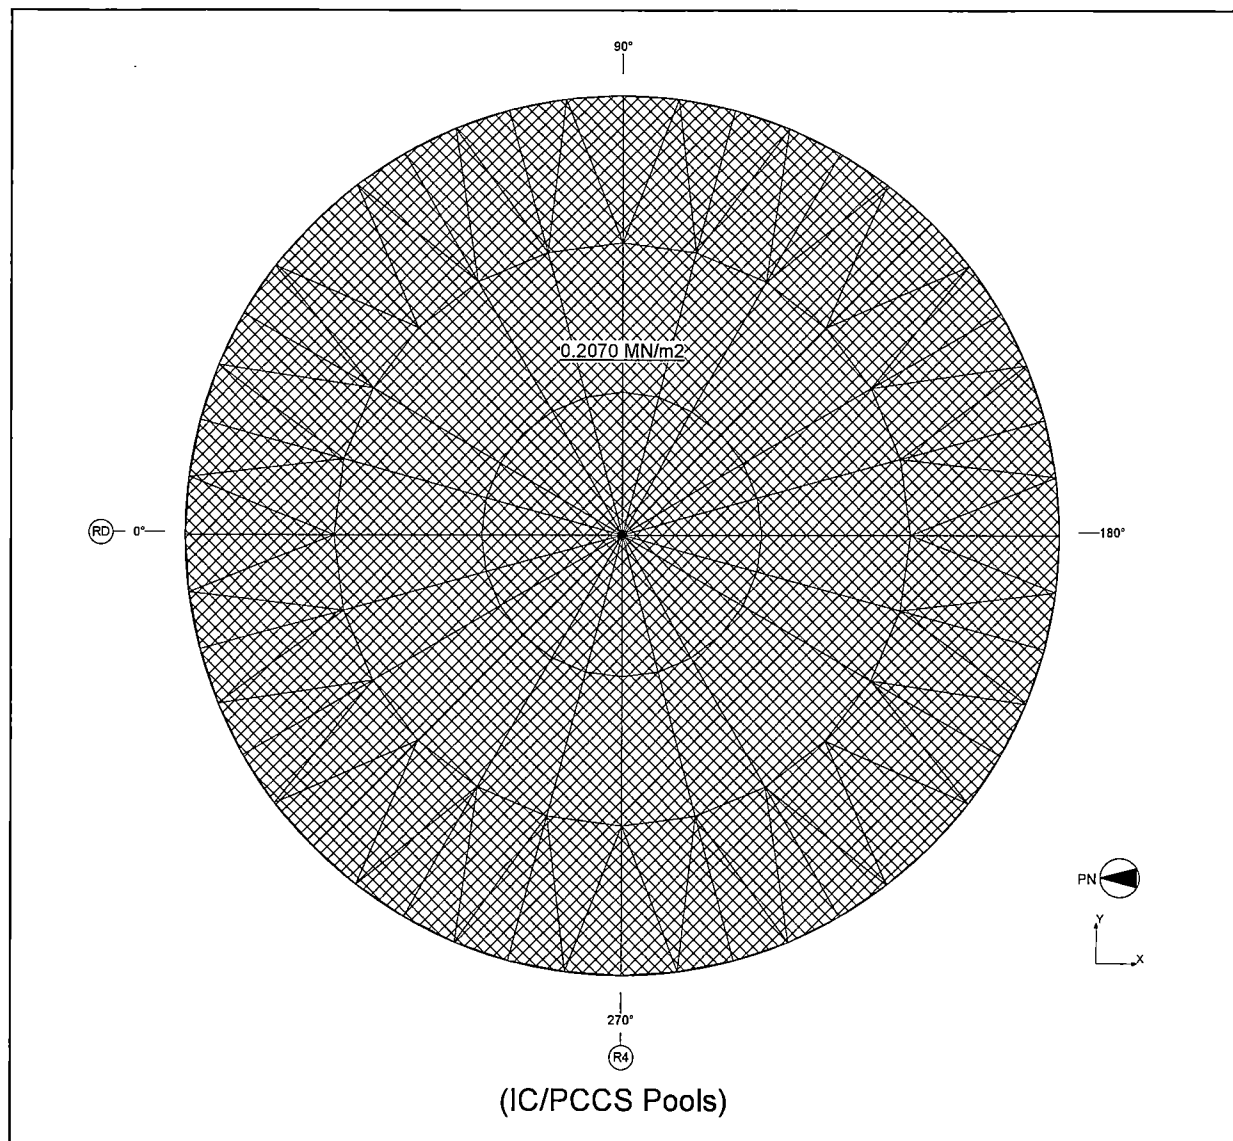


Figure 6.2.3.1-34 Hydrostatic Loads during LOCA Flooding on the Basemat Liner



HITACHI

WG3-U71-ERD-S-0004 SH NO. 327

REV. 2

of 543

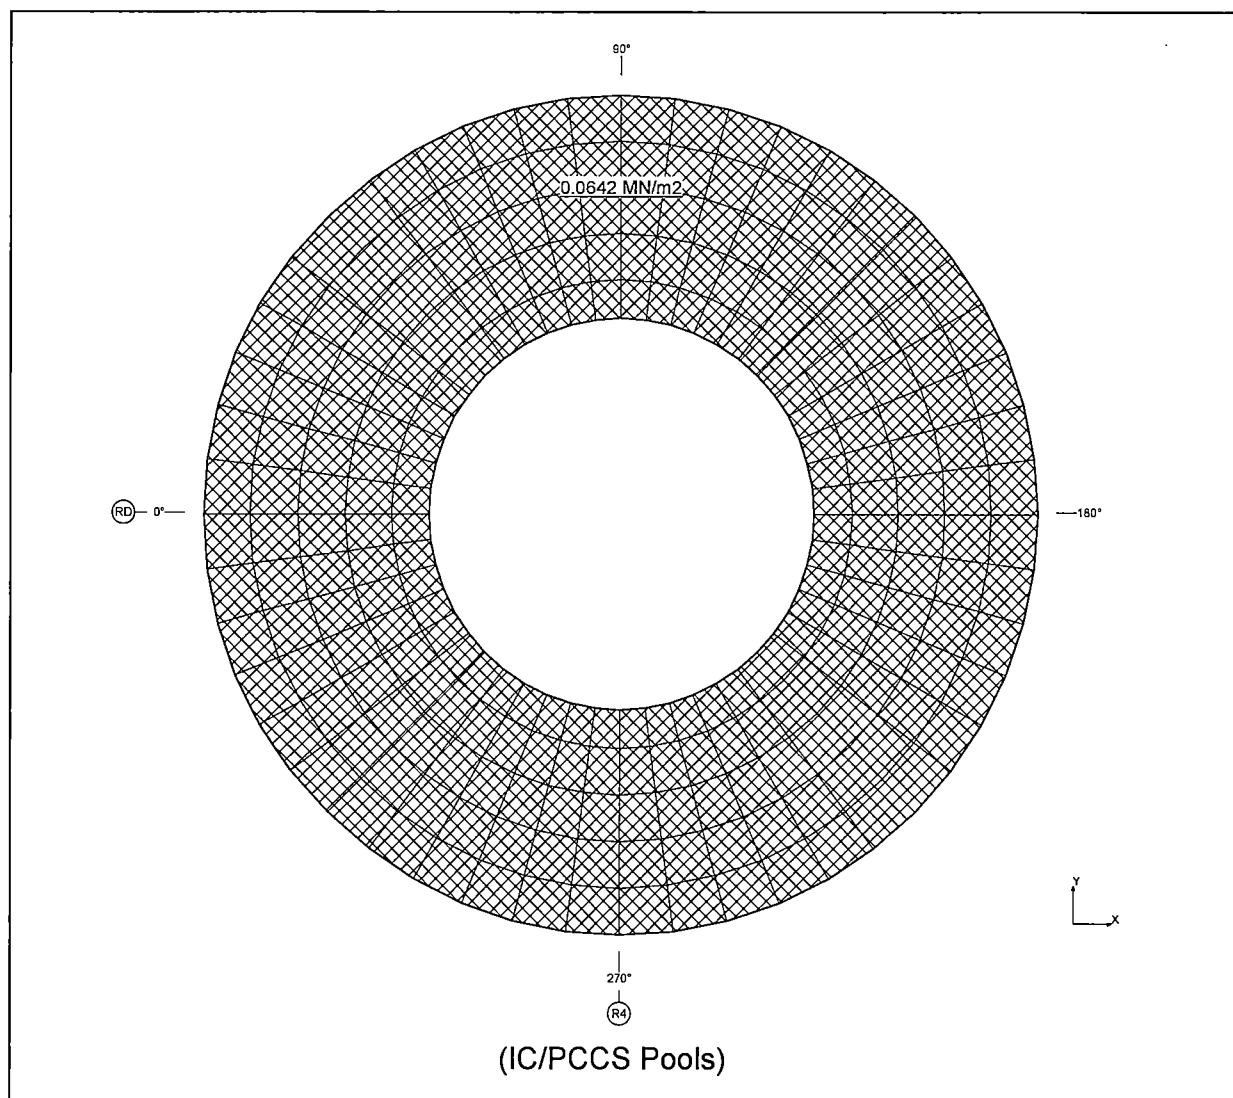


Figure 6.2.3.1-35 Hydrostatic Loads during LOCA Flooding on the Suppression Pool Liner

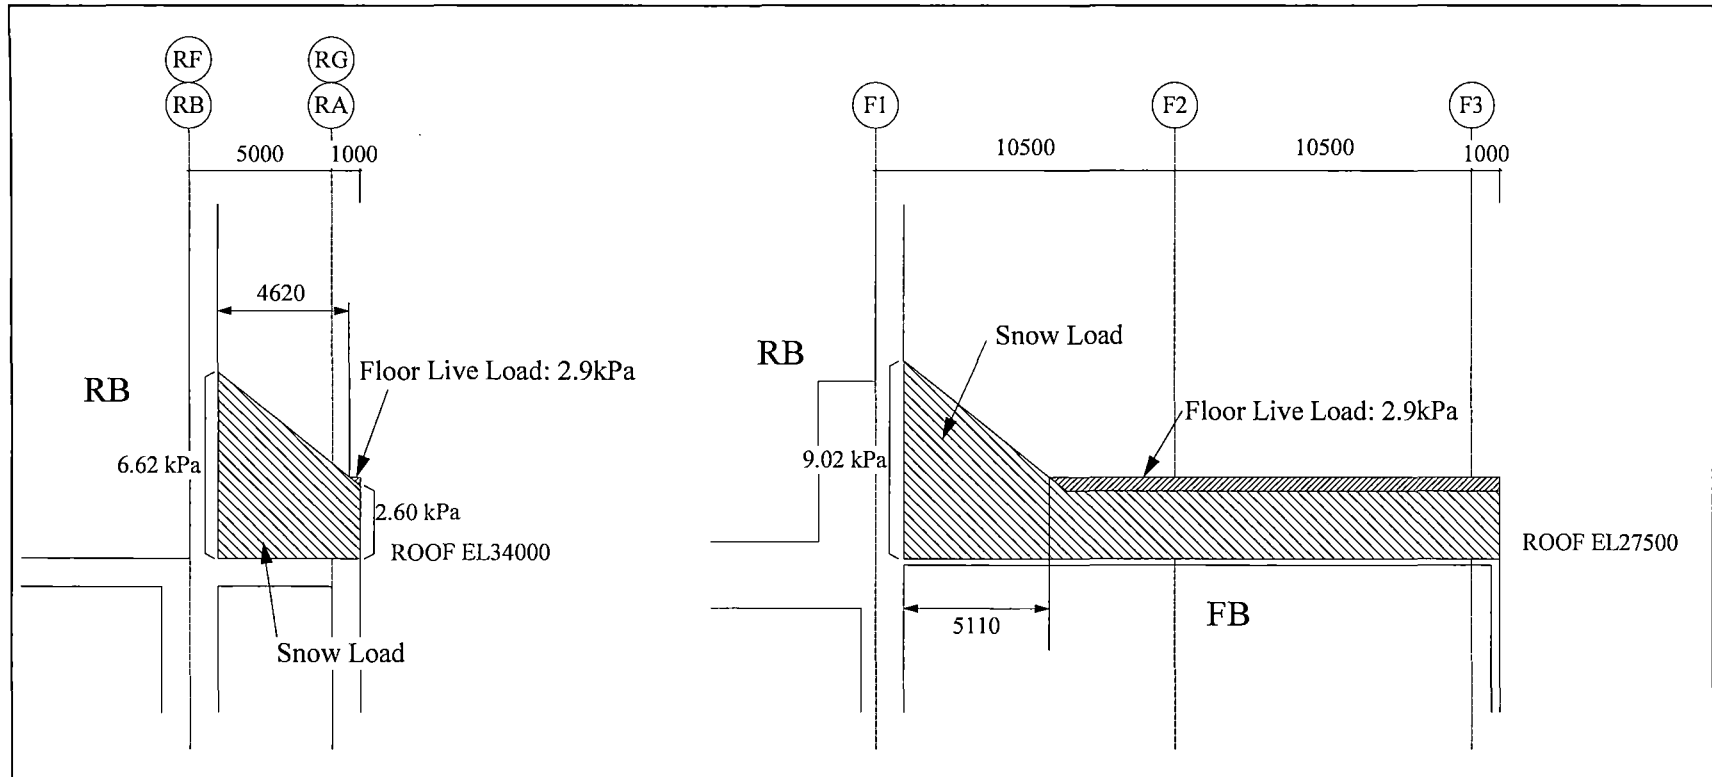


Figure 6.2.3.2-1 Floor Live Load Enveloped Snow Drift Load for Lower Roofs



HITACHI

WG3-U71-ERD-S-0004

SH NO. 329

REV. 2

of 543




Figure 6.2.3.2-2 Floor Live Load (FB EL 22,500)

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004

SH NO. 330

REV. 2

of 543




Figure 6.2.3.2-3 Lateral Soil Pressure Load at Rest (Basemat)

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}

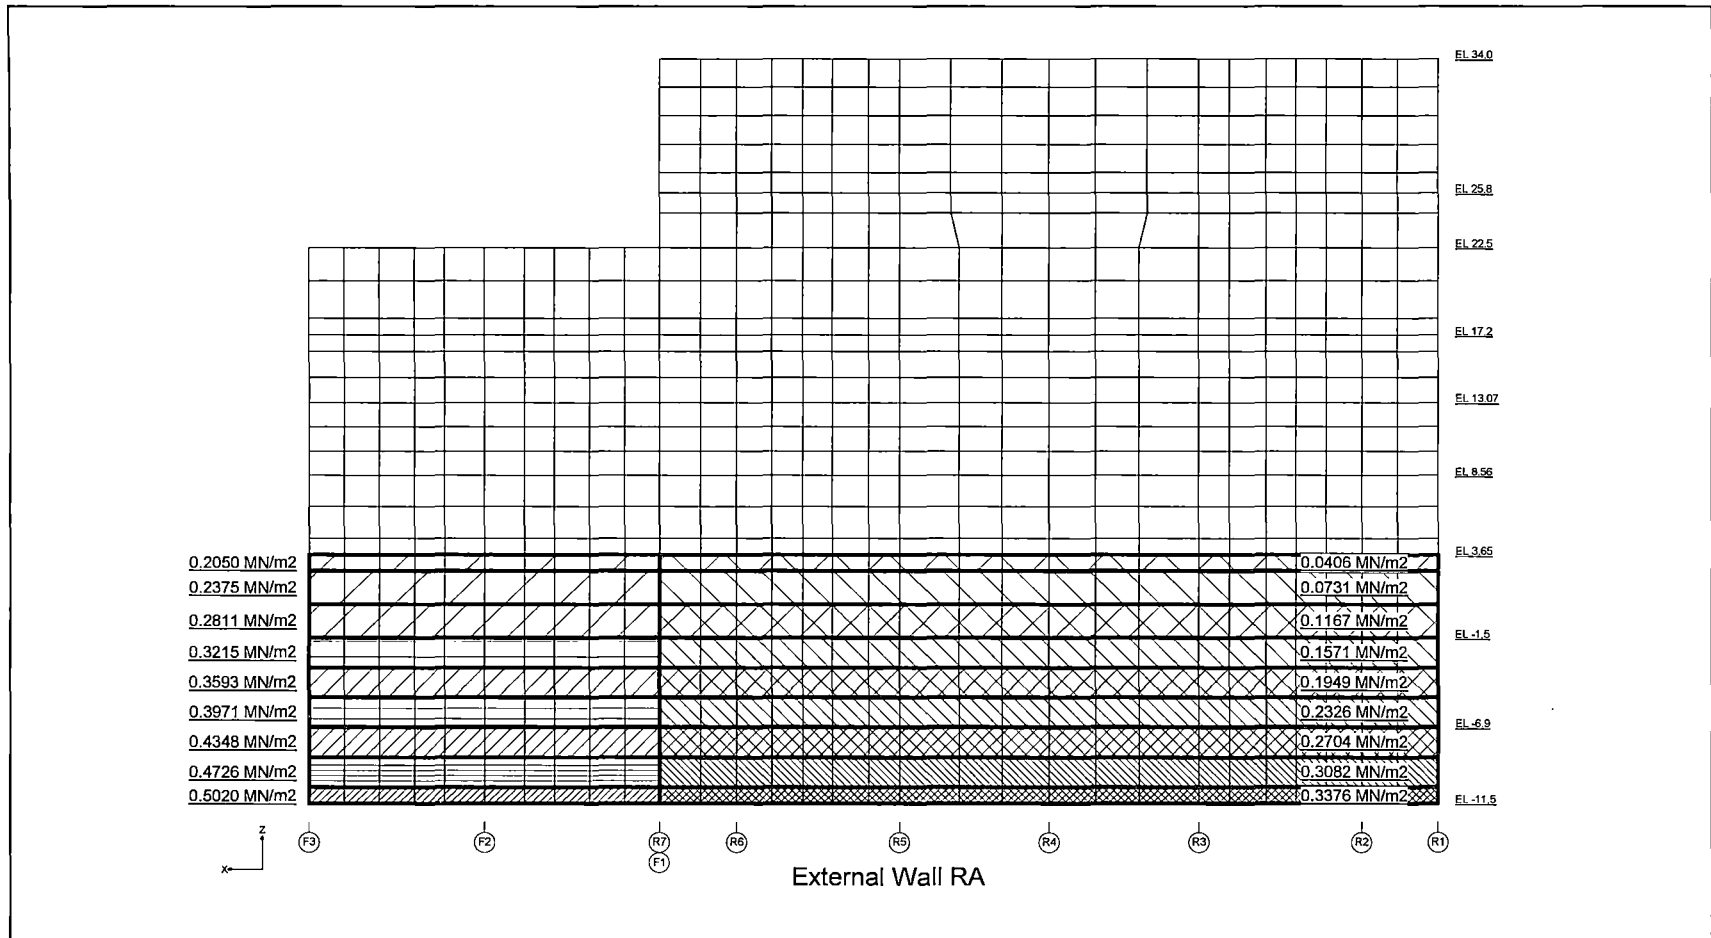


Figure 6.2.3.2-4 Lateral Soil Pressure Load at Rest (RA/FA External Wall)



HITACHI

WG3-U71-ERD-S-0004 SH NO. 332
REV. 2 of 543

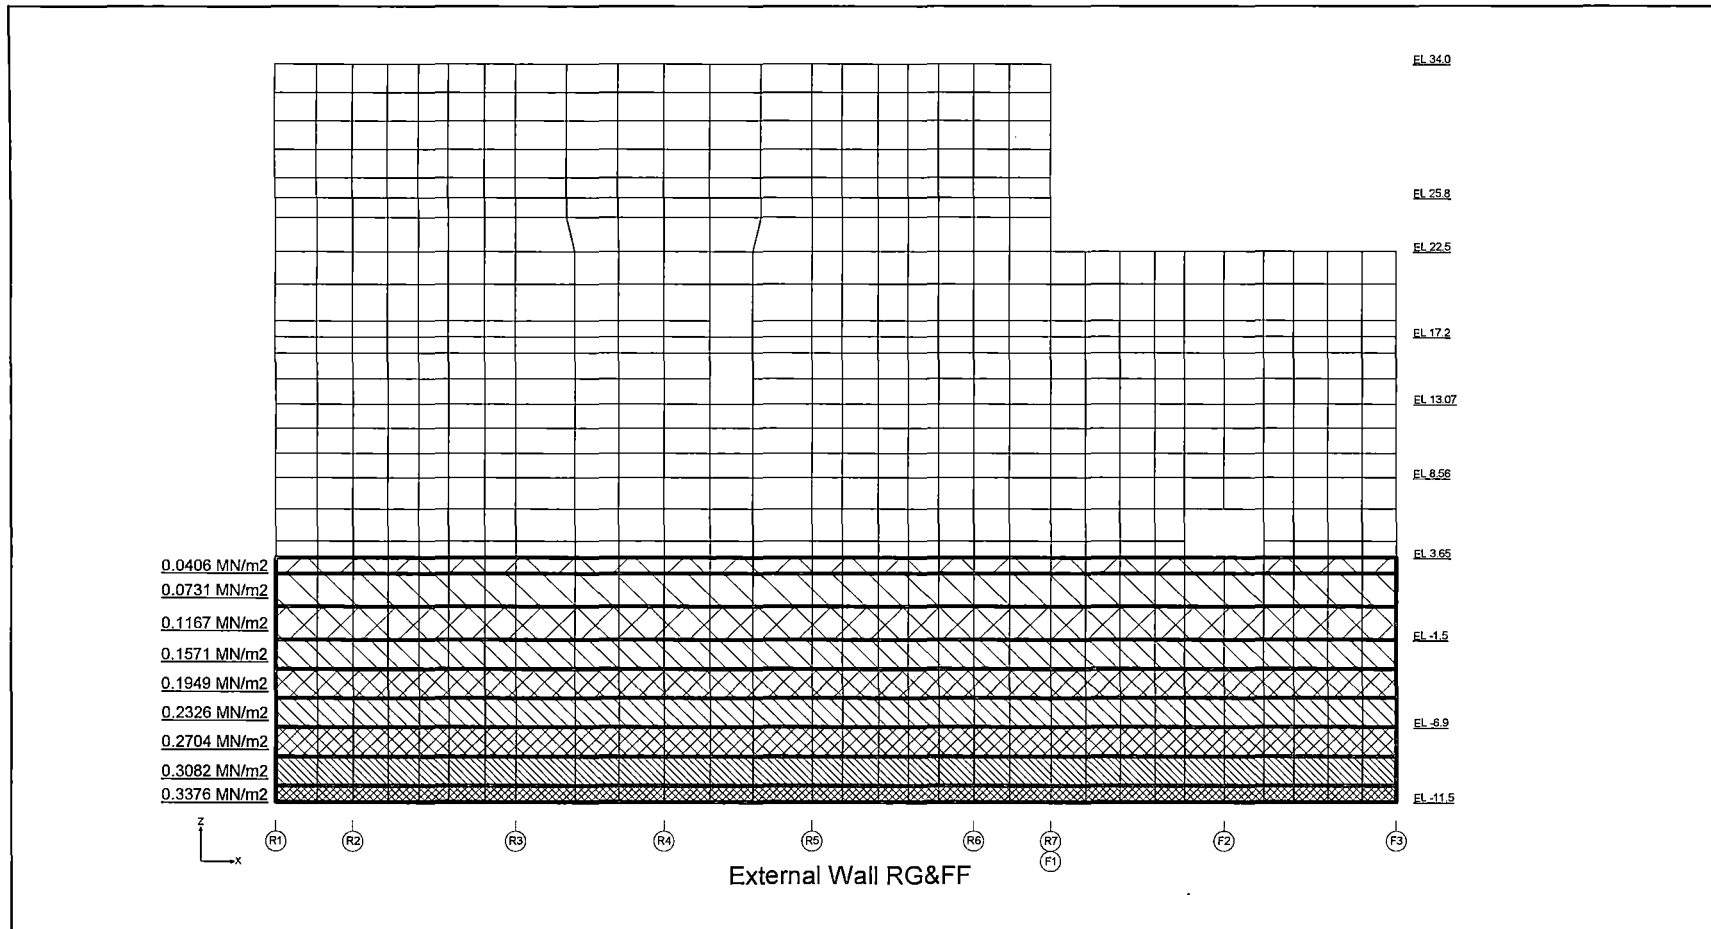


Figure 6.2.3.2-5 Lateral Soil Pressure Load at Rest (RG/FF External Wall)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 333

REV. 2

of 543

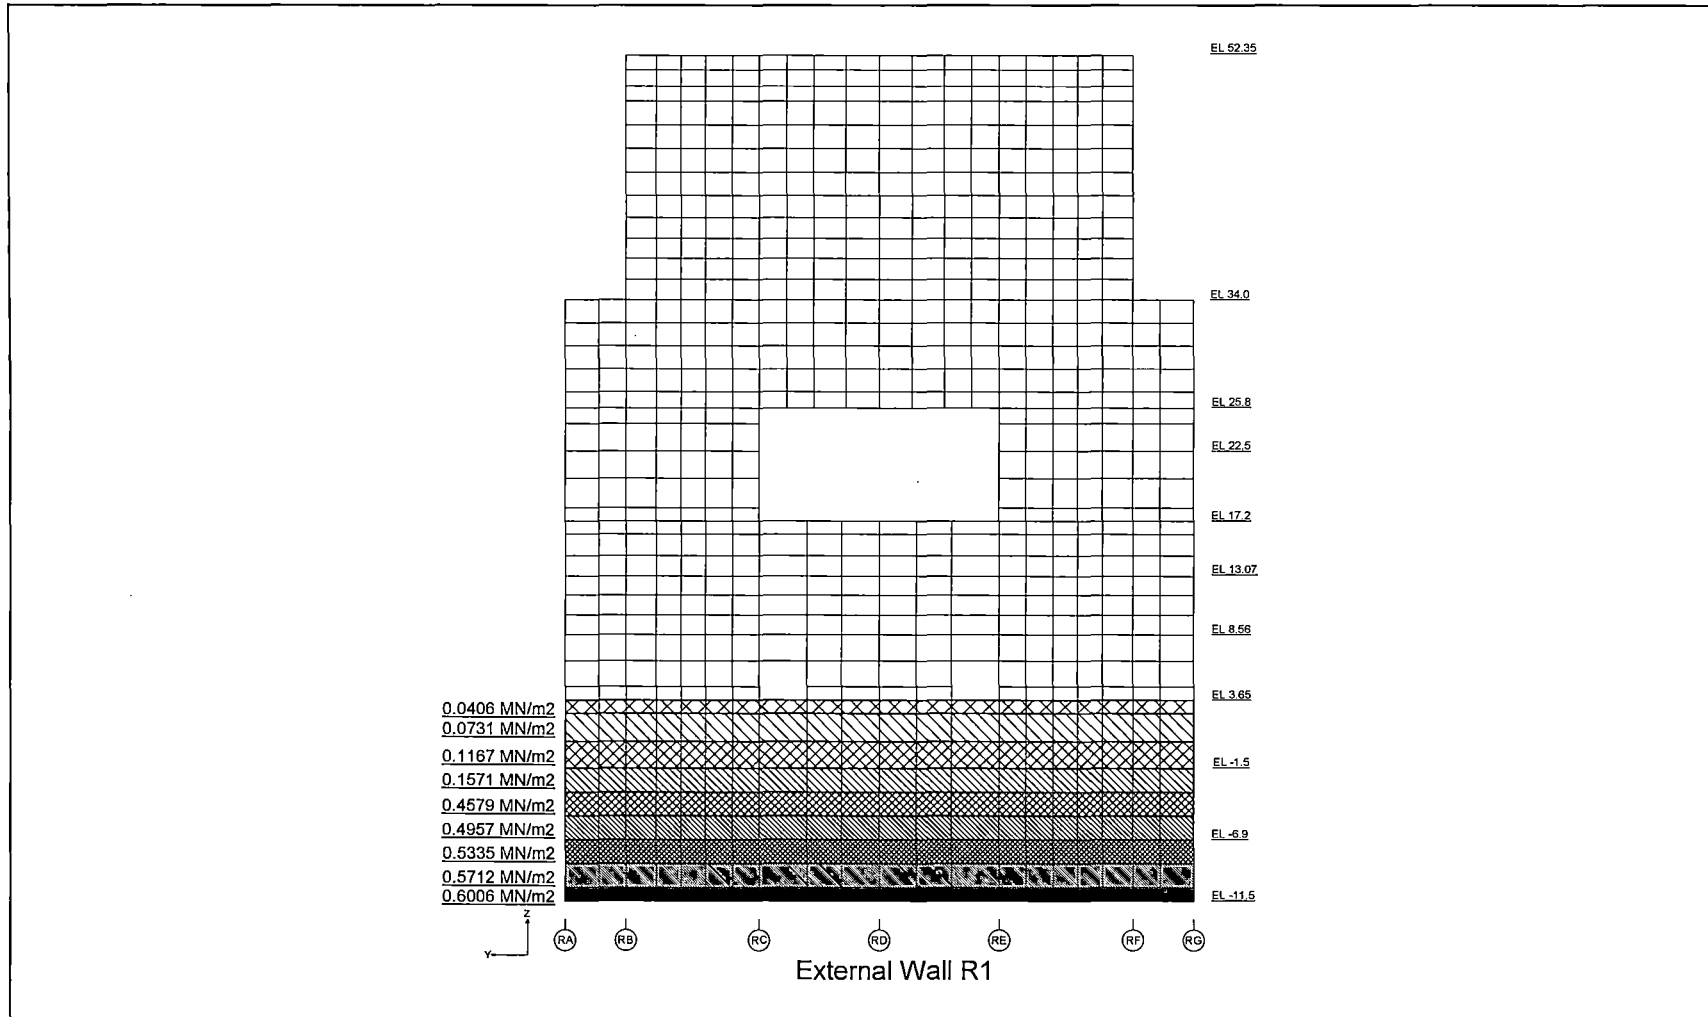


Figure 6.2.3.2-6 Lateral Soil Pressure Load at Rest (R1 External Wall)

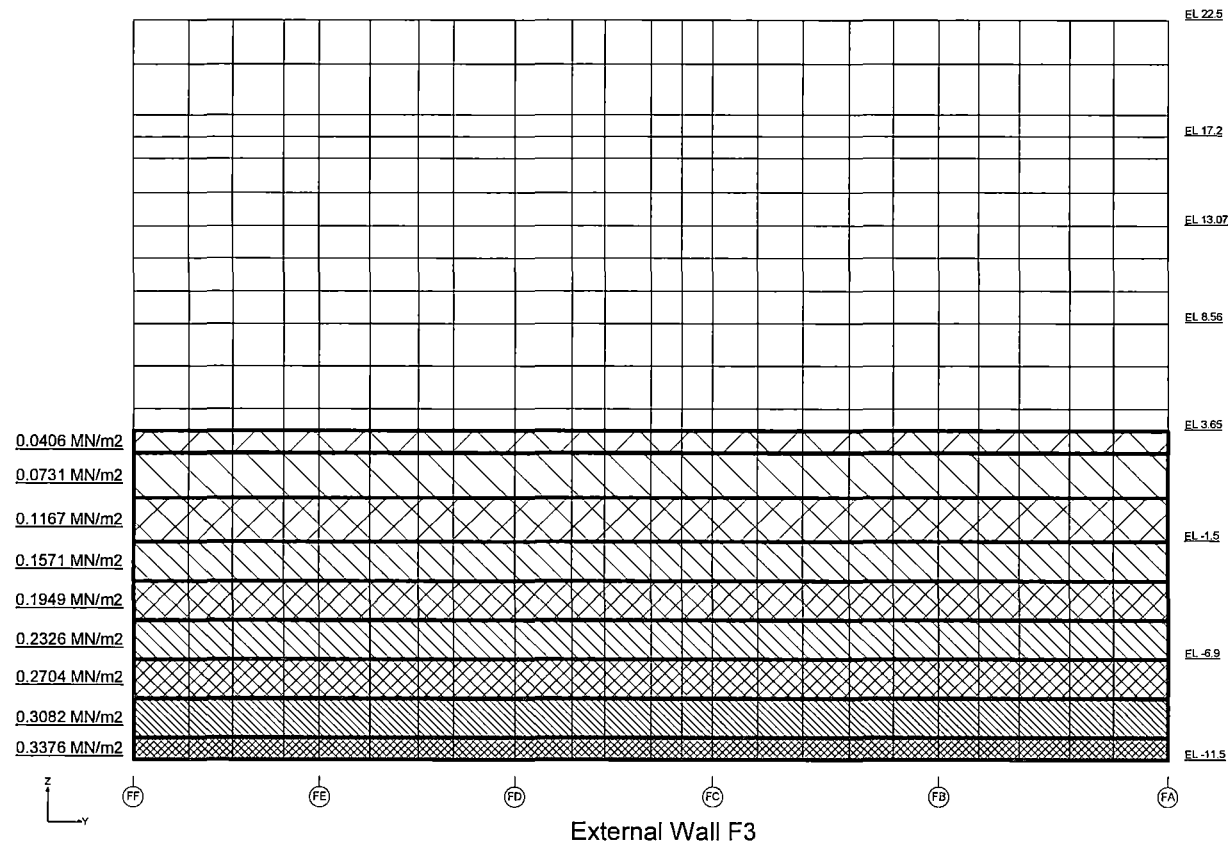


Figure 6.2.3.2-7 Lateral Soil Pressure Load at Rest (F3 External Wall)



HITACHI

WG3-U71-ERD-S-0004 SH NO. 335

REV. 2

of 543

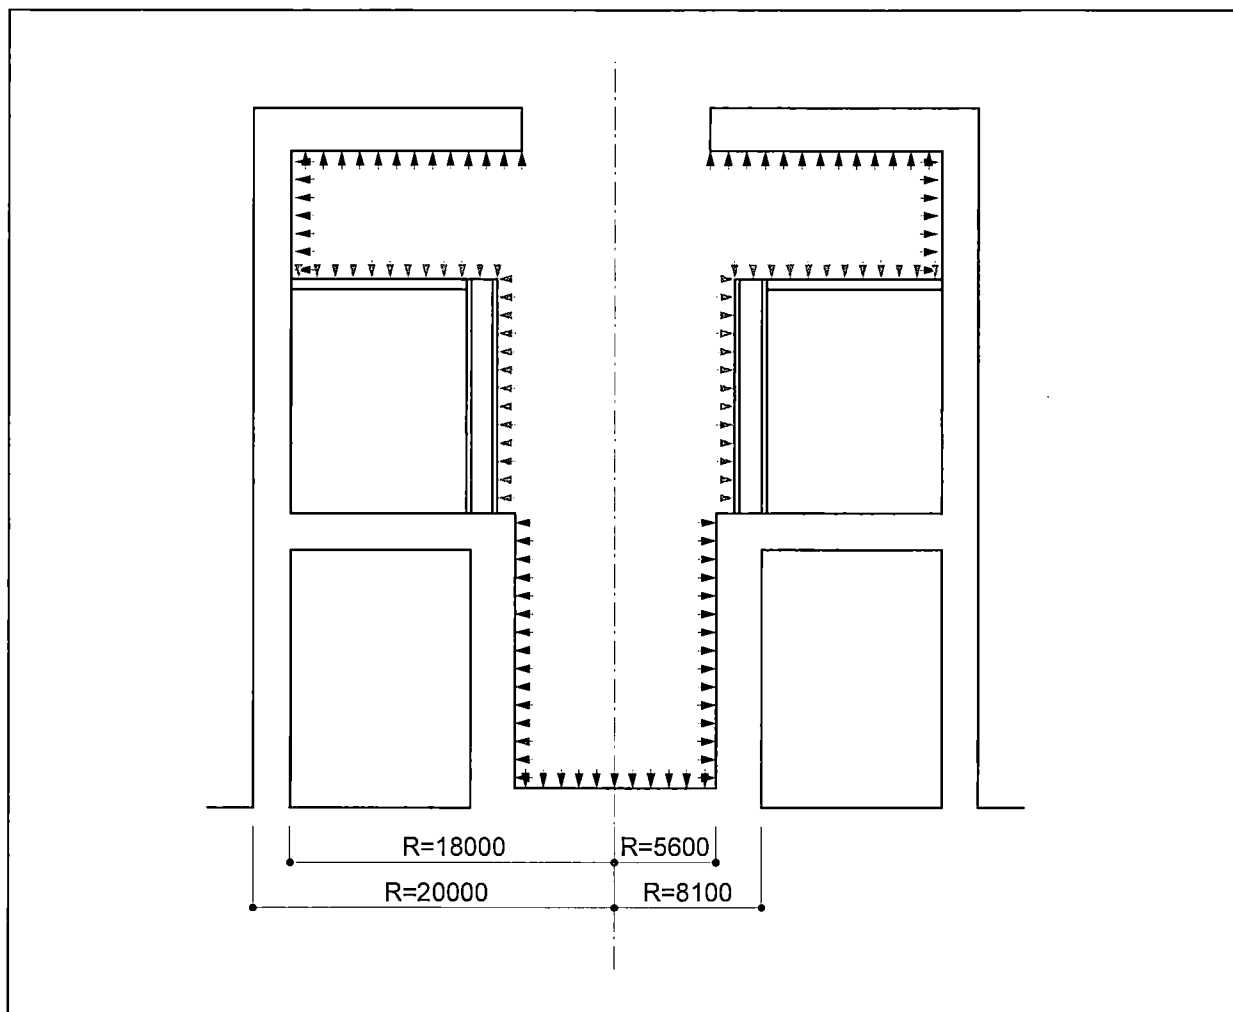


Figure 6.2.3.3-1 Containment Pressure Loads - Drywell Unit Pressure



HITACHI

WG3-U71-ERD-S-0004 SH NO. 336

REV. 2

of 543

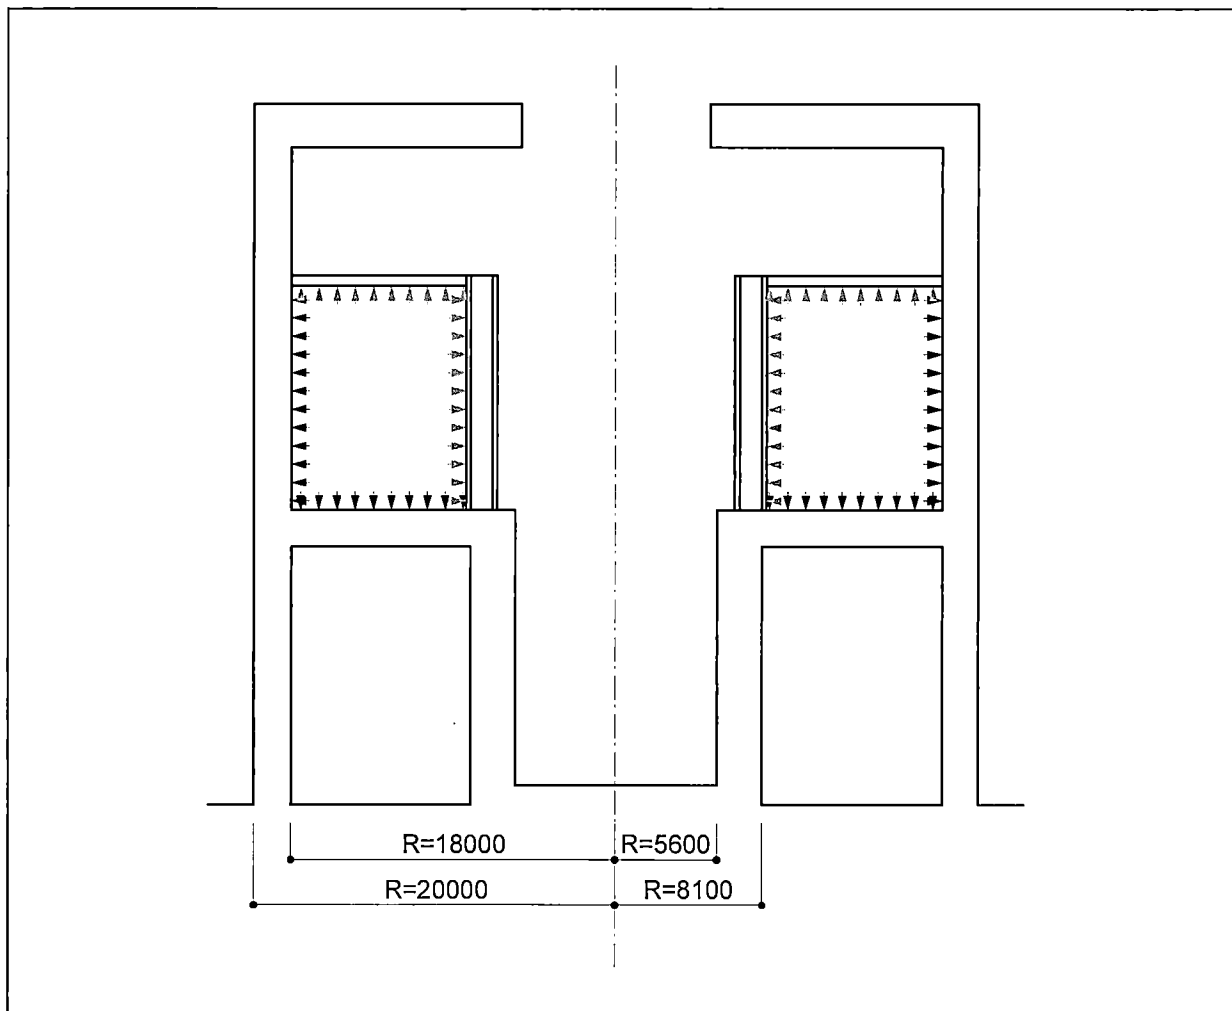


Figure 6.2.3.3-2 Containment Pressure Loads - Wetwell Unit Pressure



HITACHI

WG3-U71-ERD-S-0004 SH NO. 337
REV. 2 of 543

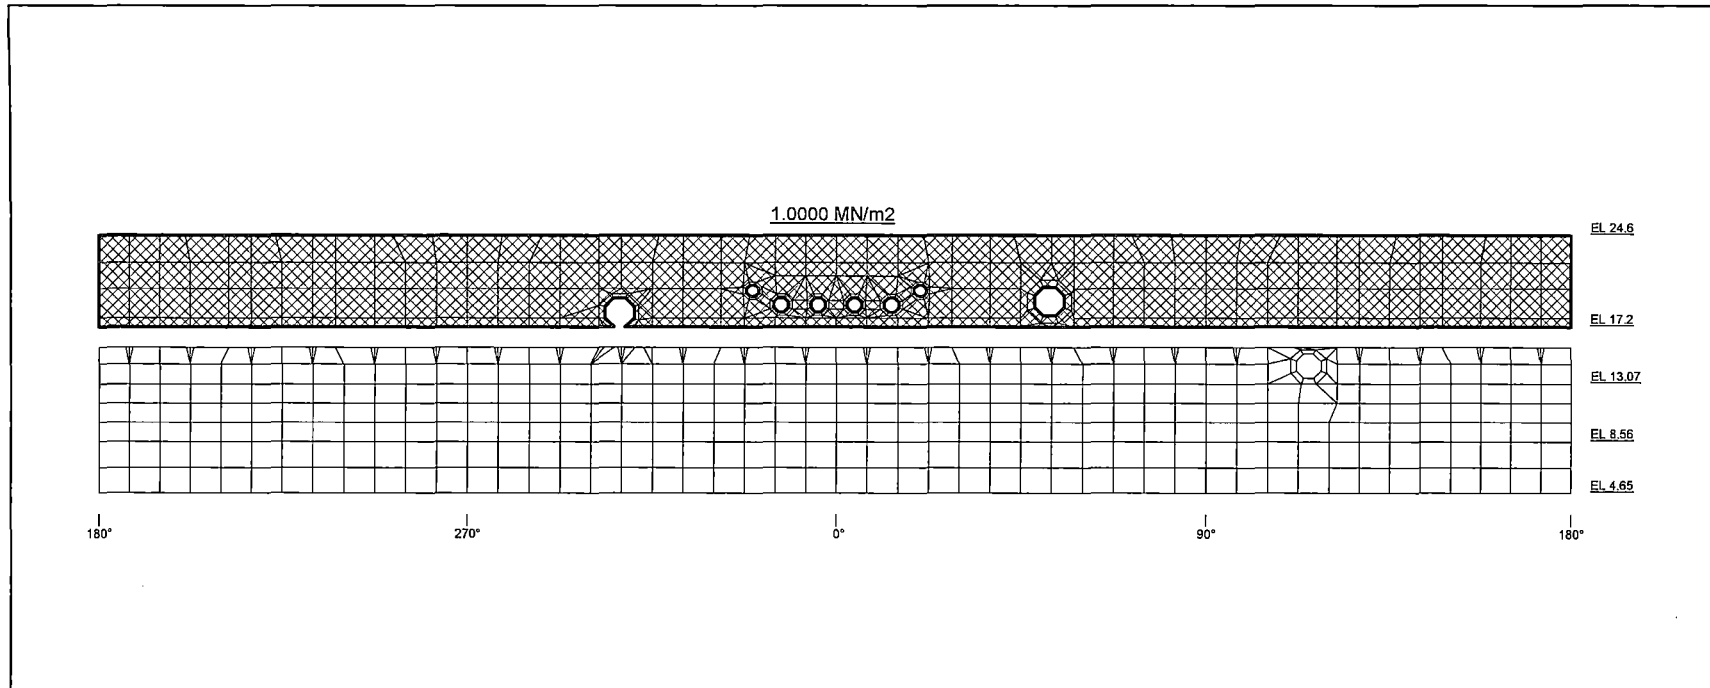


Figure 6.2.3.3-3 Containment Pressure Load (Drywell: RCCV Liner)



HITACHI

WG3-U71-ERD-S-0004 SH NO. 338
REV. 2 of 543

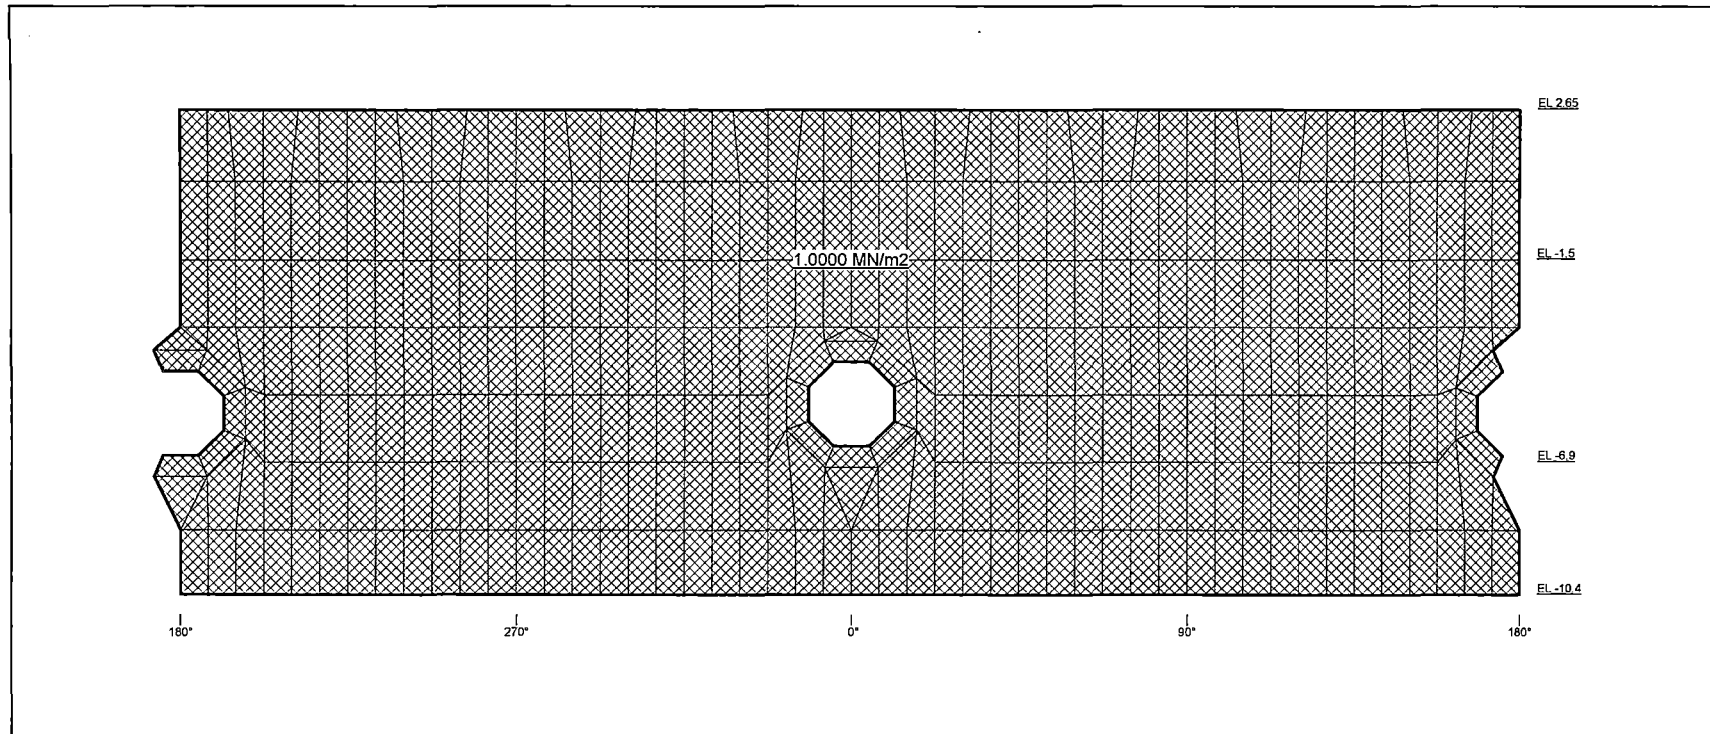


Figure 6.2.3.3-4 Containment Pressure Load (Drywell: RPV Pedestal Liner)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 339

REV. 2

of 543

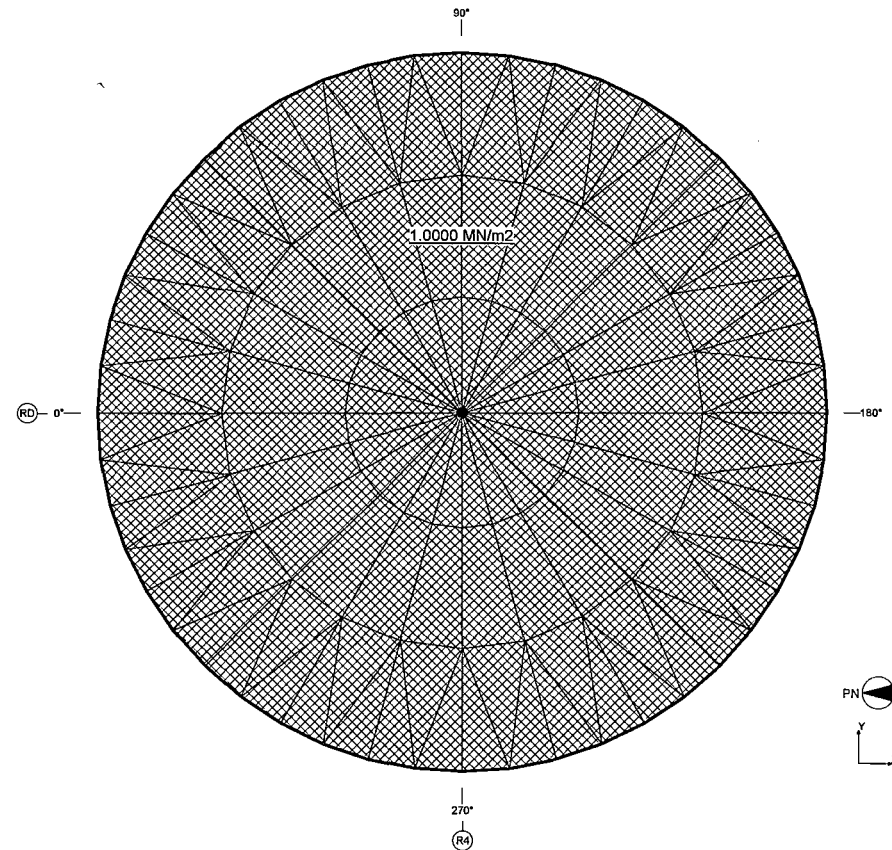


Figure 6.2.3.3-5 Containment Pressure Load (Drywell: Basemat Liner)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 340

REV. 2

of 543

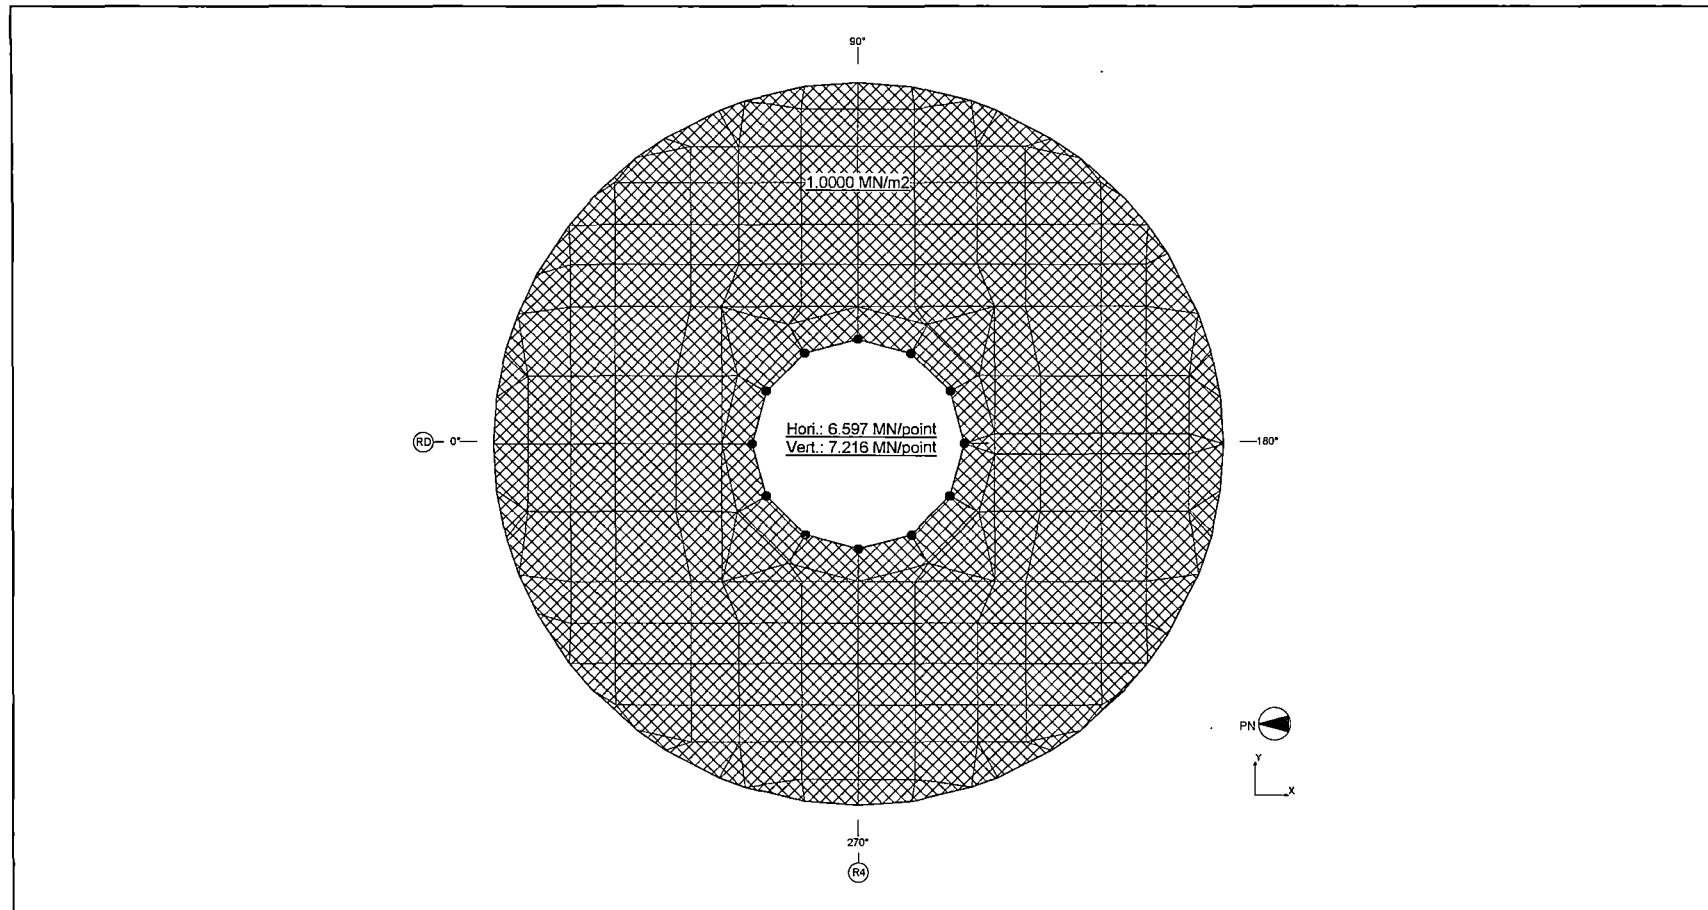


Figure 6.2.3.3-6 Containment Pressure Load (Drywell: Top Slab Liner)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 341

REV. 2

of 543

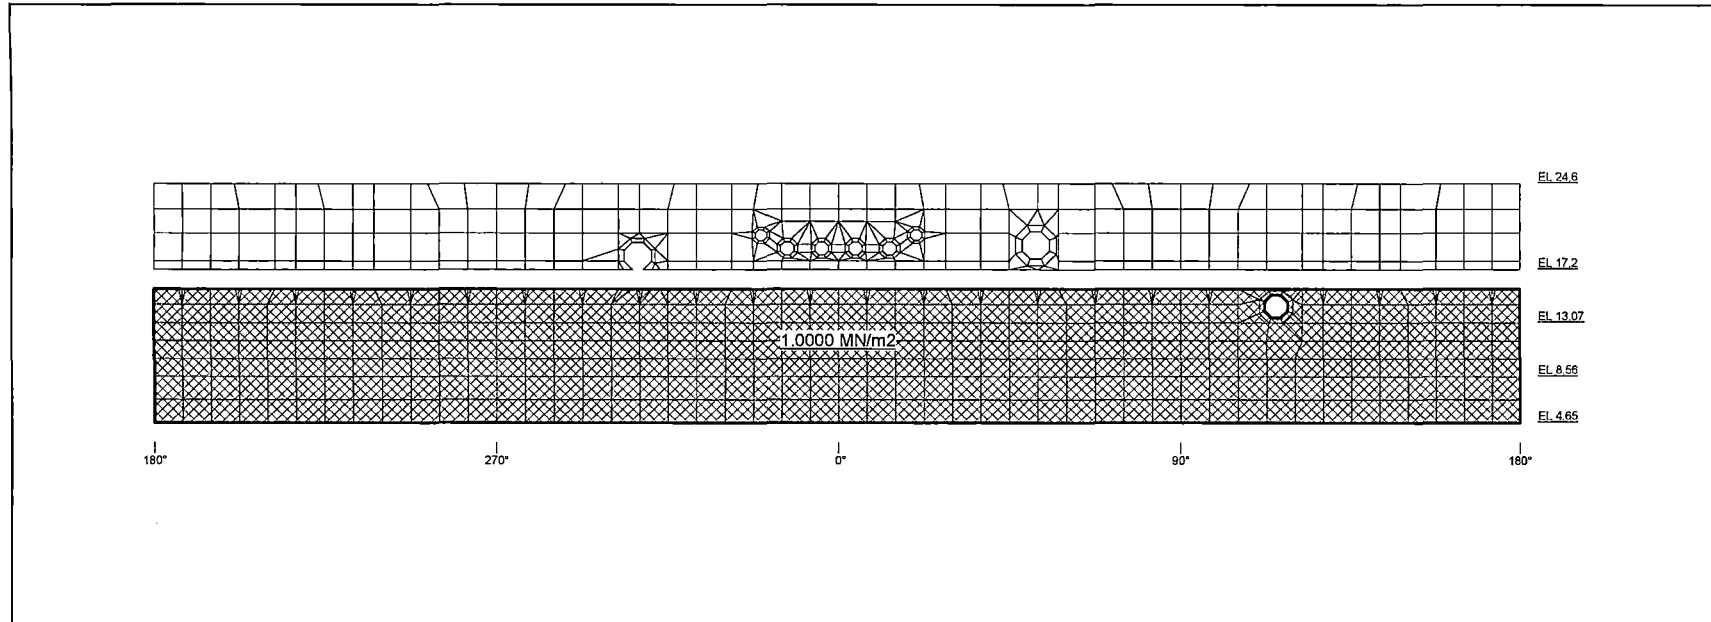


Figure 6.2.3.3-7 Containment Pressure Load (Wetwell: RCCV Liner)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 342

REV. 2

of 543

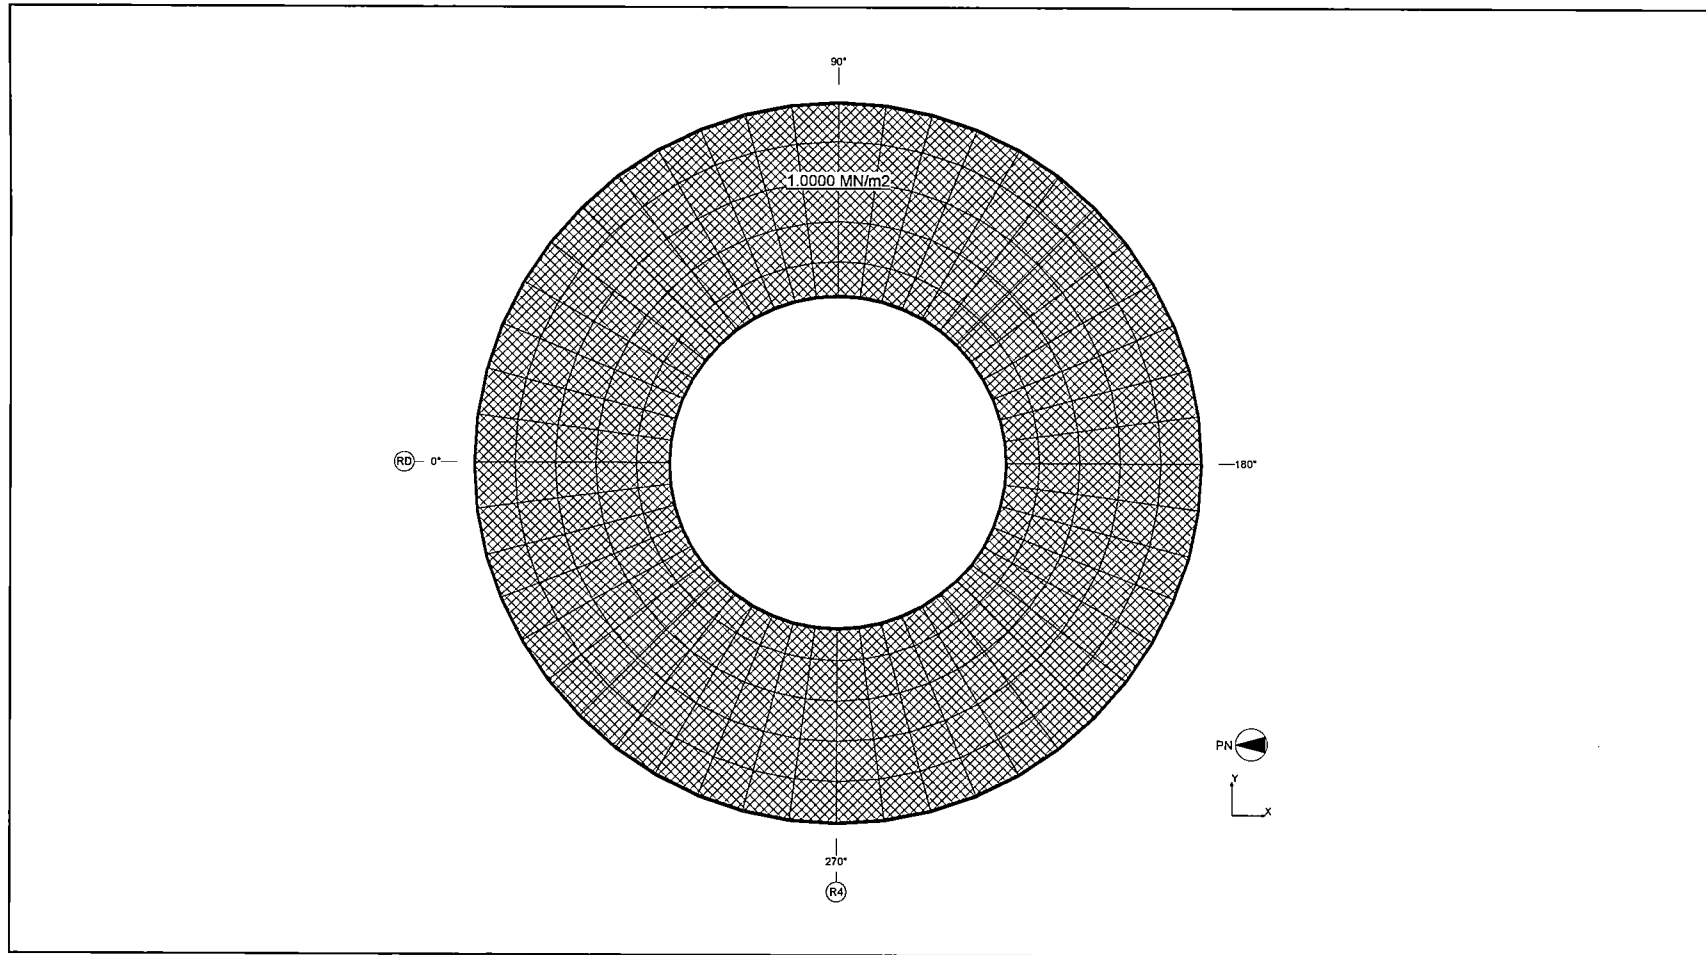


Figure 6.2.3.3-8 Containment Pressure Load (Wetwell: Suppression Pool Slab Liner)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 343

REV. 2

of 543




Figure 6.2.3.3-9 Containment Pressure Load (IC/PCCS Pool: Slab at EL 27,000)

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004

SH NO. 344

REV. 2

of 543




Figure 6.2.3.3-10 Containment Pressure Load (IC/PCCS Pool: Slab at EL 34,000)

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004 SH NO. 345

REV. 2

of 543

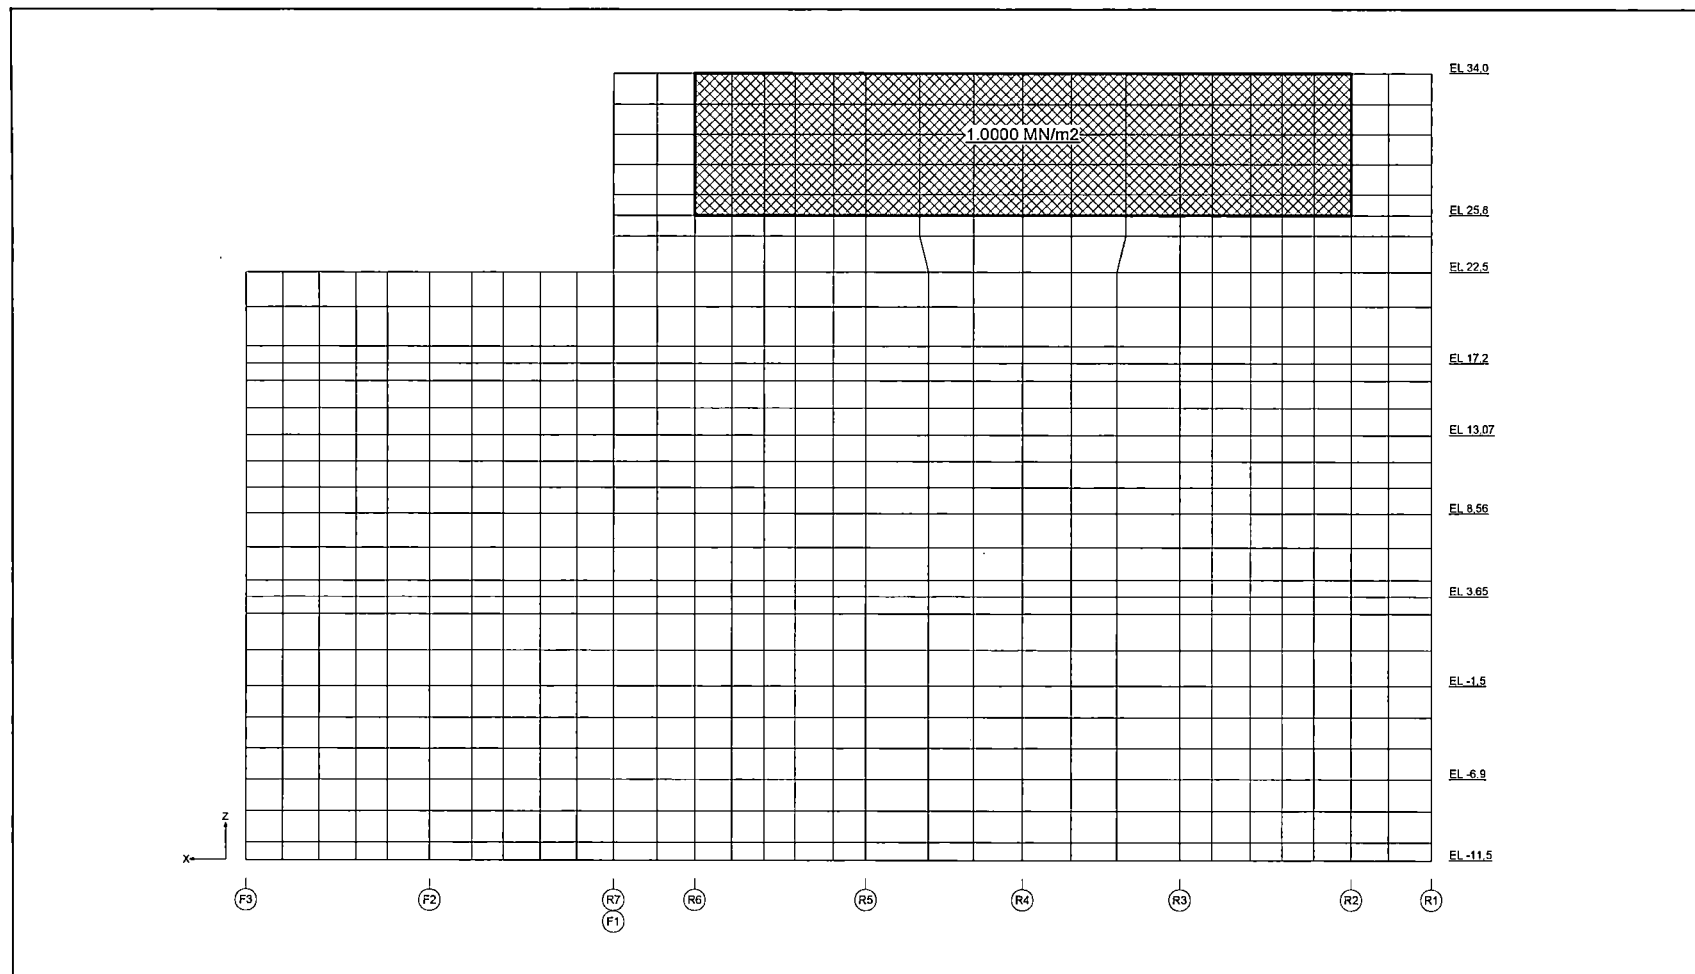


Figure 6.2.3.3-11 Containment Pressure Load (IC/PCCS Pool: External Wall RA)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 346

REV. 2

of 543

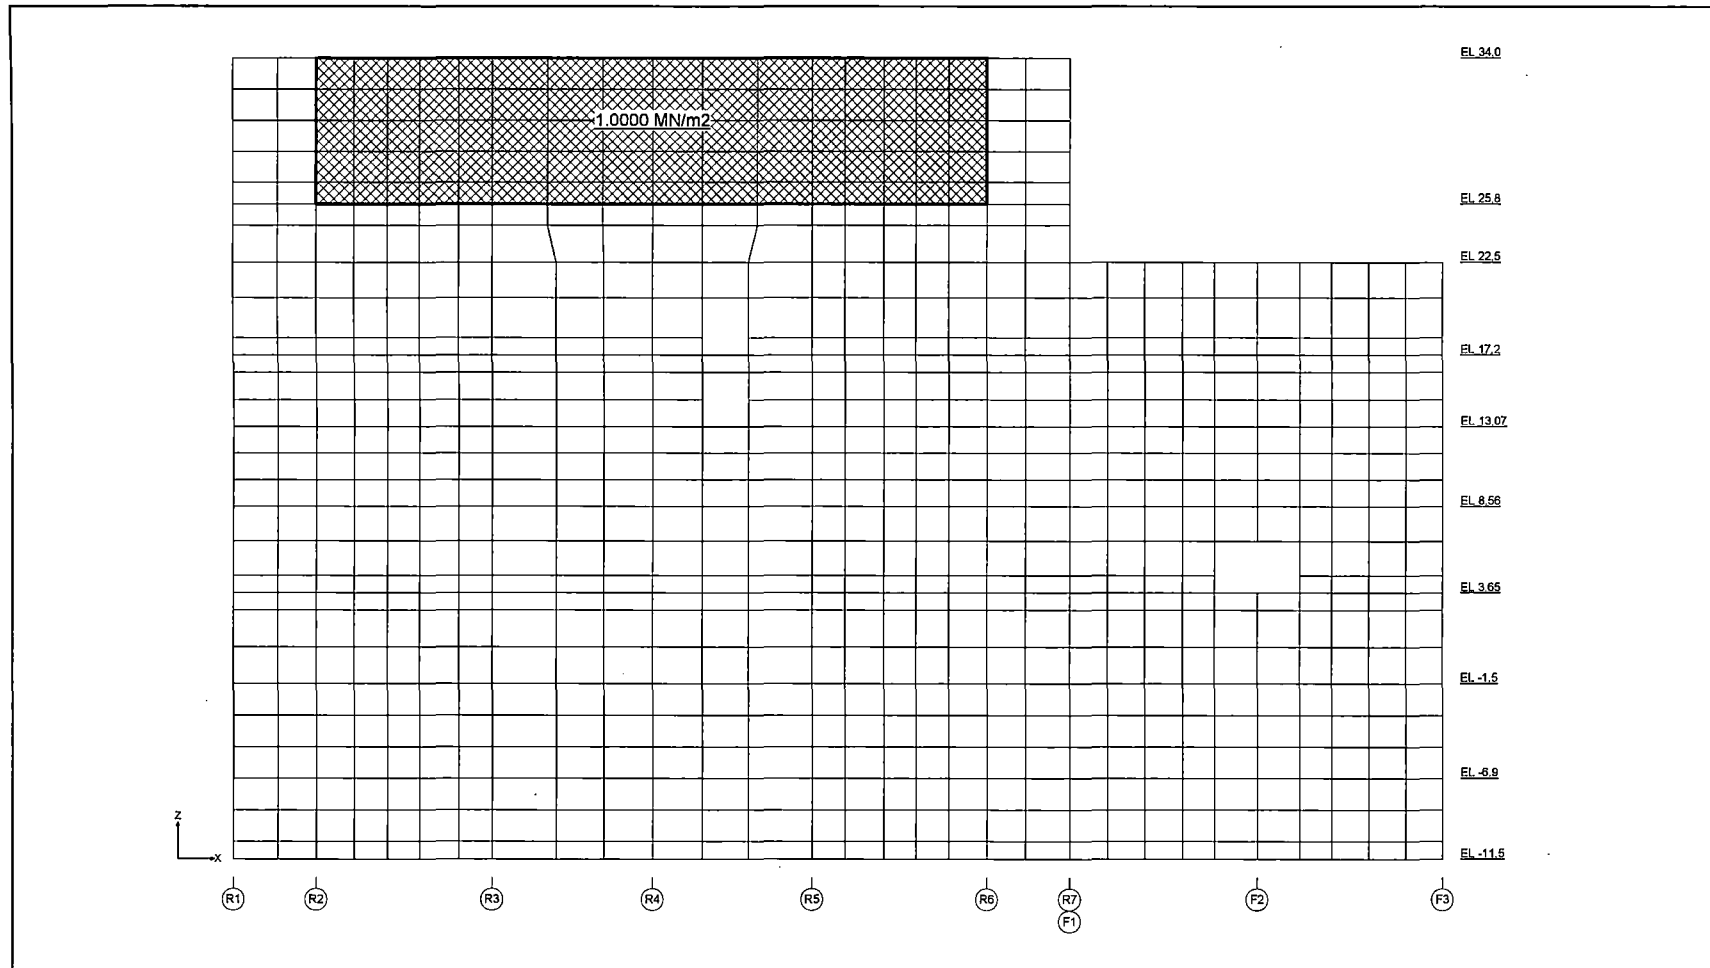


Figure 6.2.3.3-12 Containment Pressure Load (IC/PCCS Pool: External Wall RG)



HITACHI

WG3-U71-ERD-S-0004 SH NO. 347
REV. 2 of 543

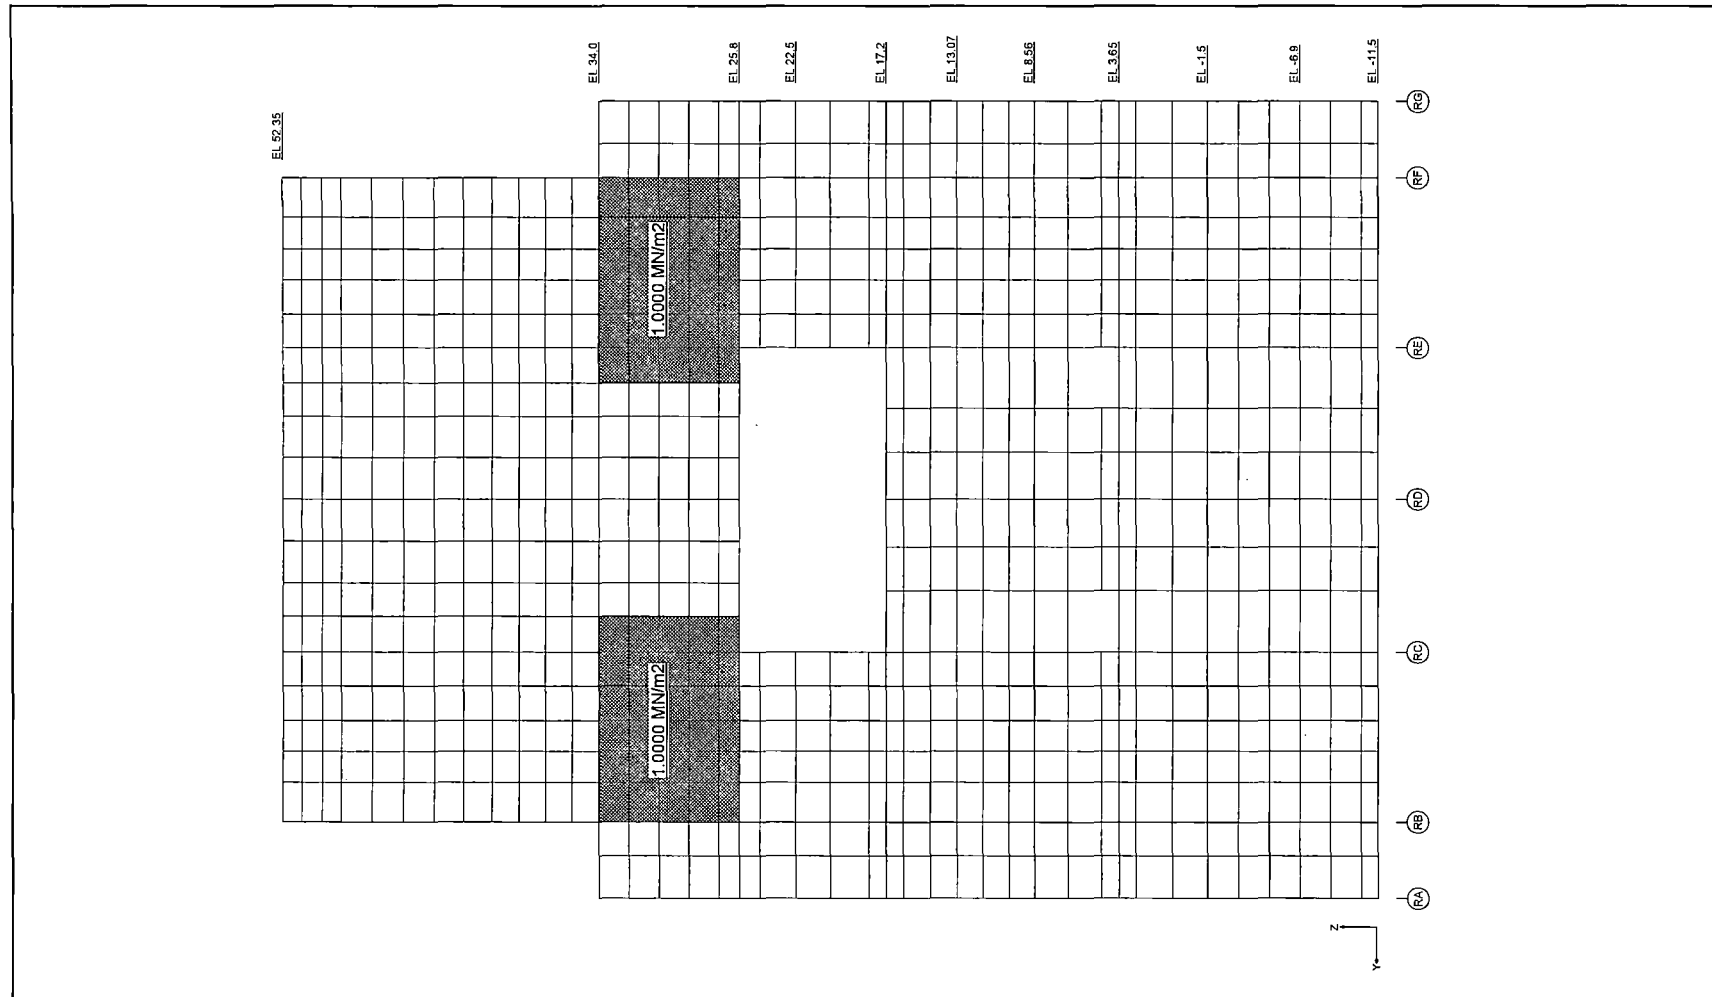


Figure 6.2.3.3-13 Containment Pressure Load (IC/PCCS Pool: External Wall R1)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 348

REV. 2

of 543

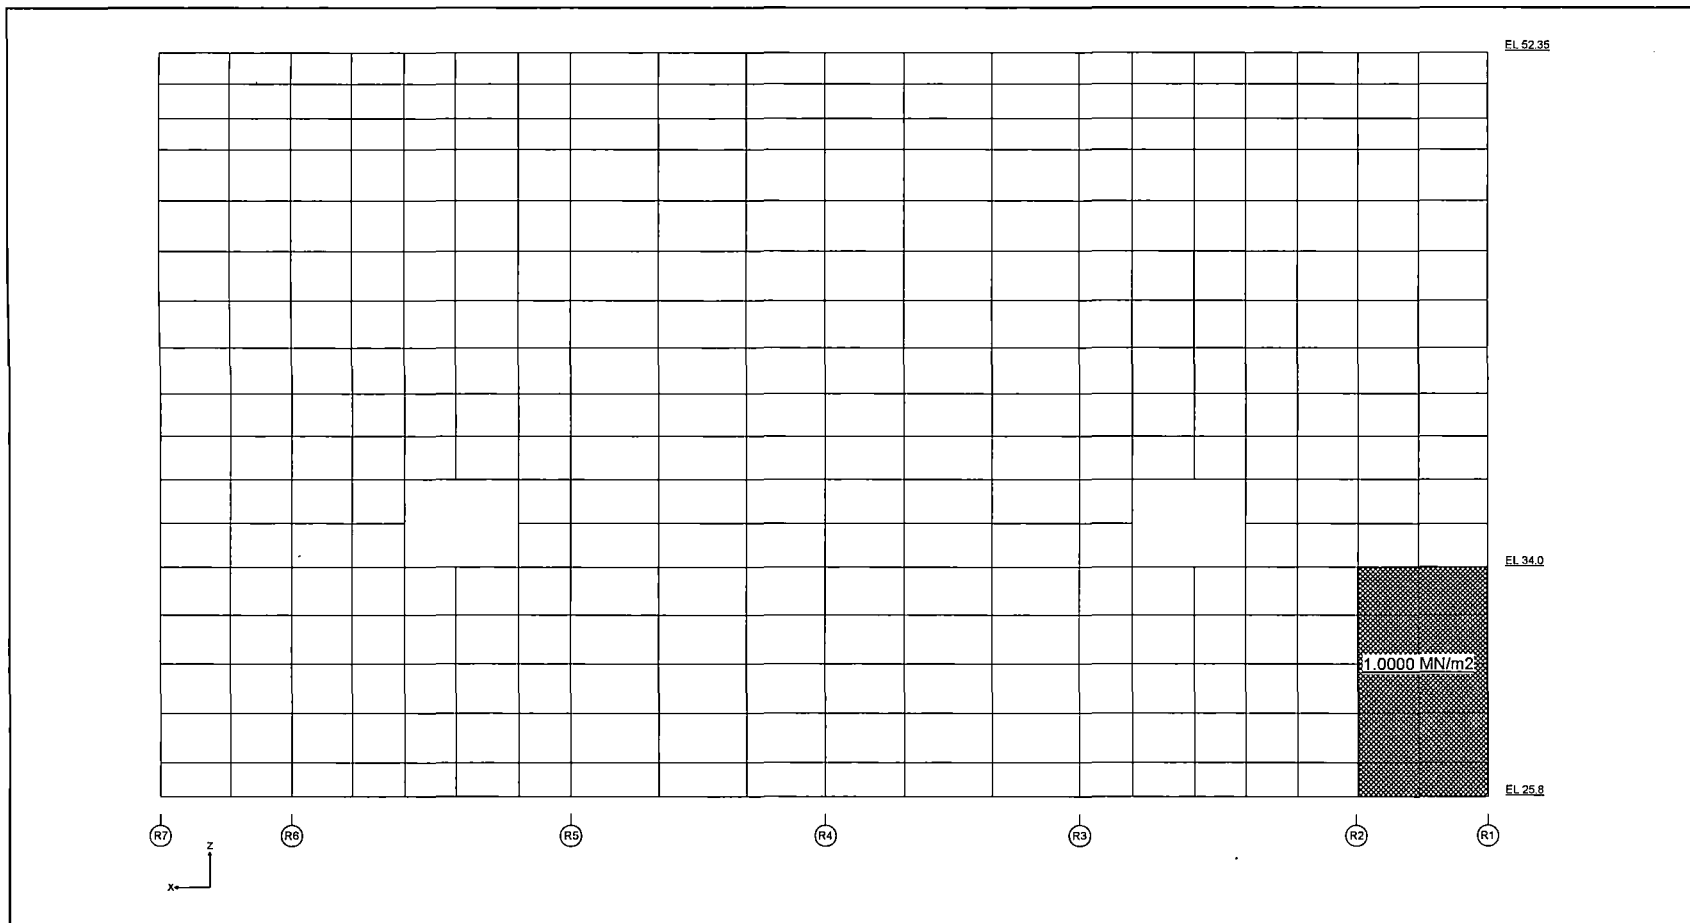


Figure 6.2.3.3-14 Containment Pressure Load (IC/PCCS Pool: Wall RB)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 349

REV. 2

of 543

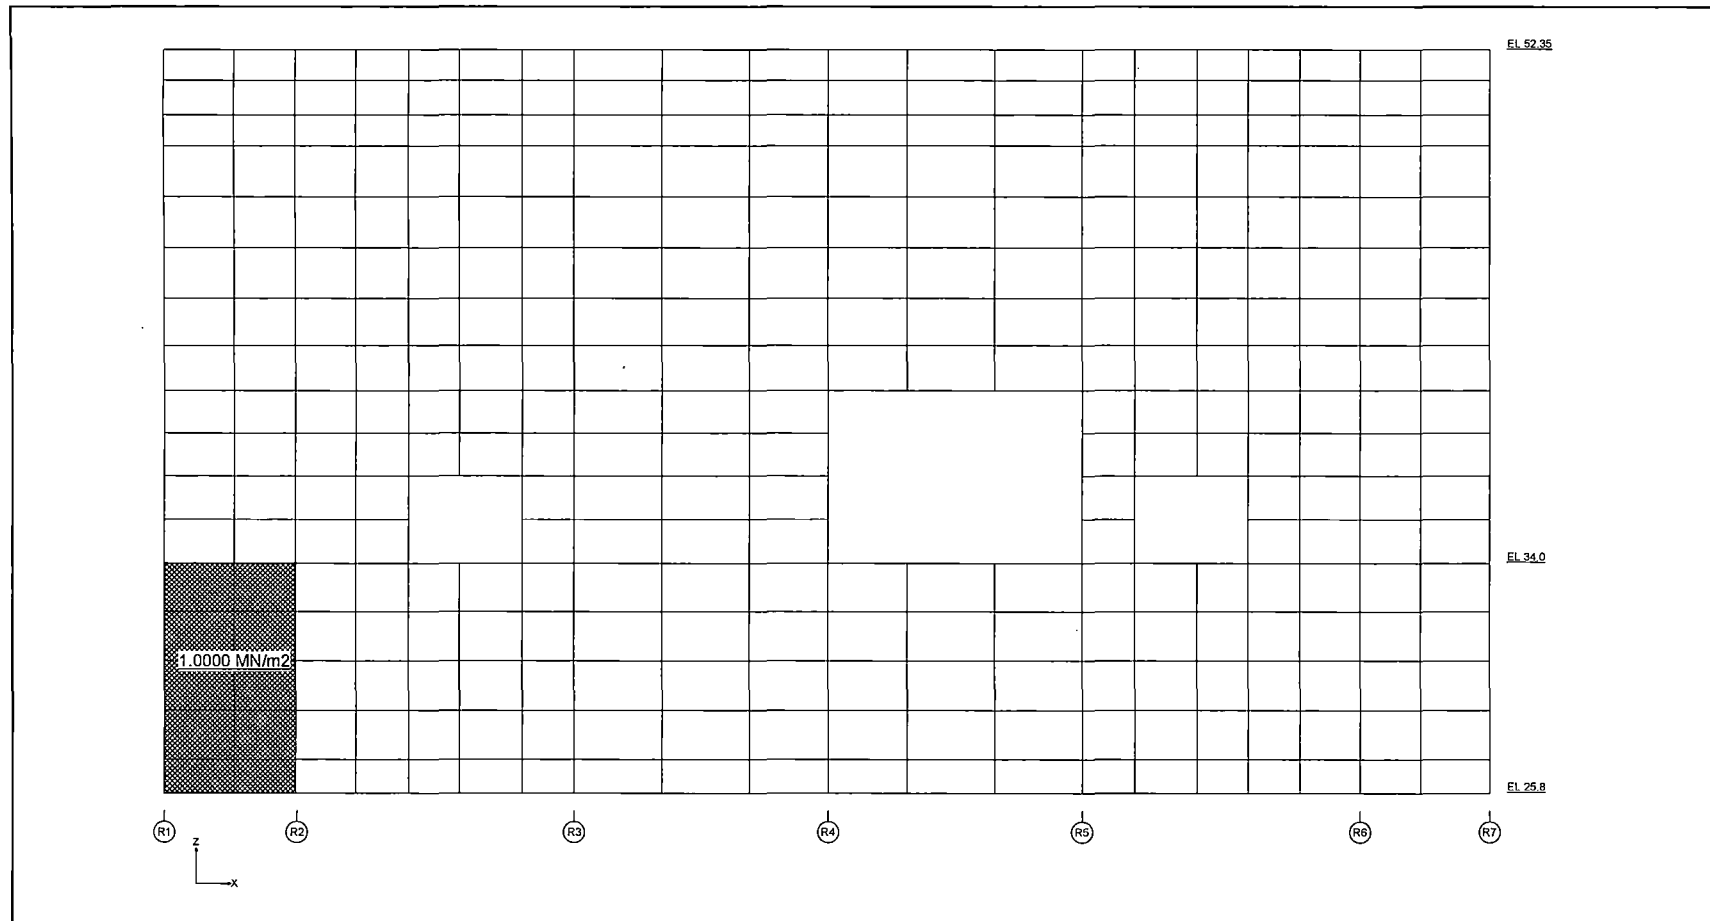


Figure 6.2.3.3-15 Containment Pressure Load (IC/PCCS Pool: Wall RF)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 350

REV. 2

of 543

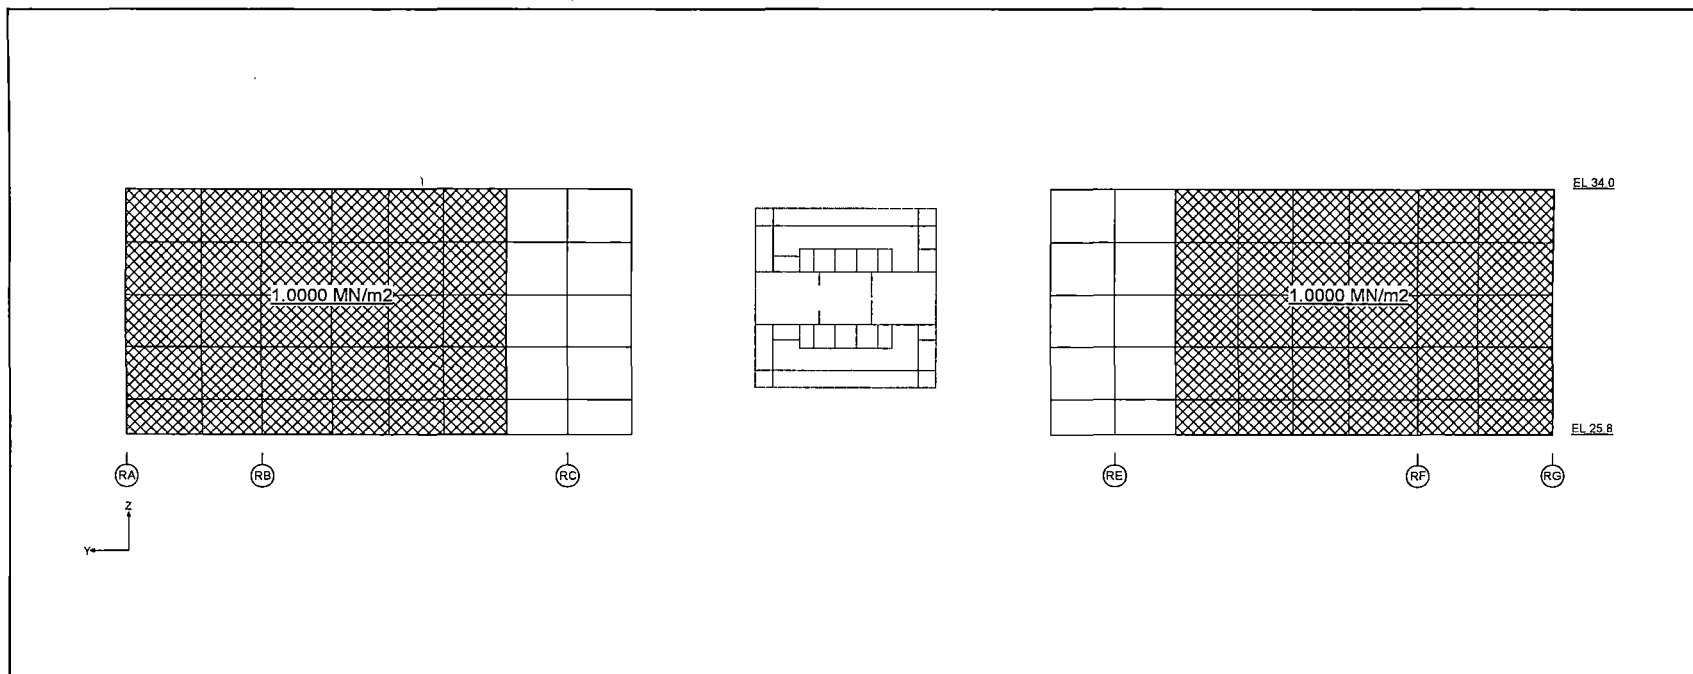


Figure 6.2.3.3-16 Containment Pressure Load (IC/PCCS Pool: Wall R2)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 351

REV. 2

of 543

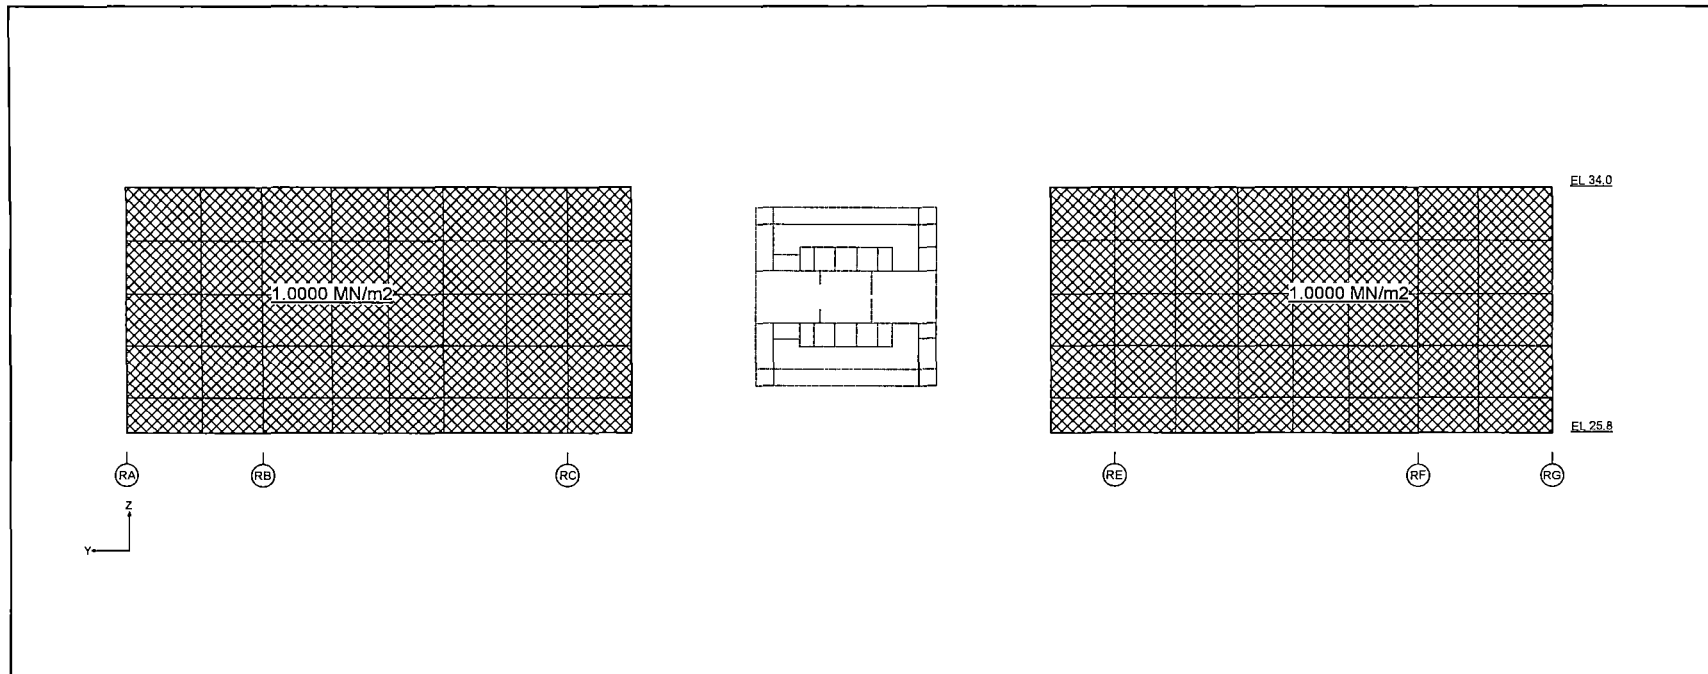


Figure 6.2.3.3-17 Containment Pressure Load (IC/PCCS Pool: Wall R6)



HITACHI

WG3-U71-ERD-S-0004 SH NO. 352
REV. 2 of 543

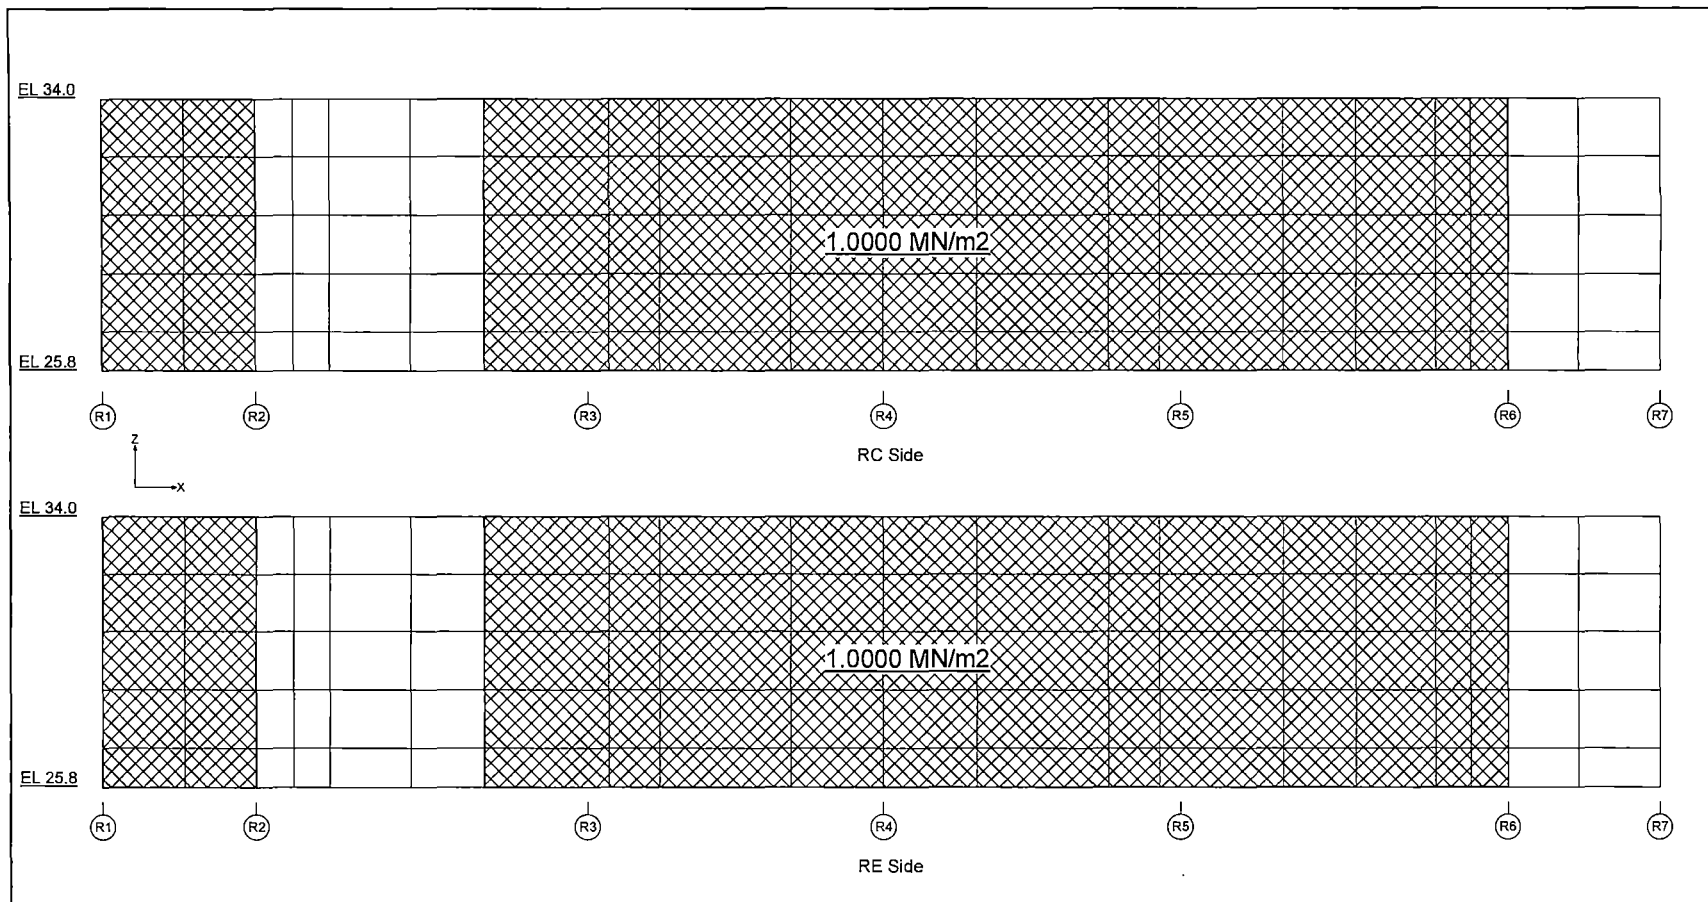


Figure 6.2.3.3-18 Containment Pressure Load (IC/PCCS Pool: Pool Girder)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 353

REV. 2

of 543

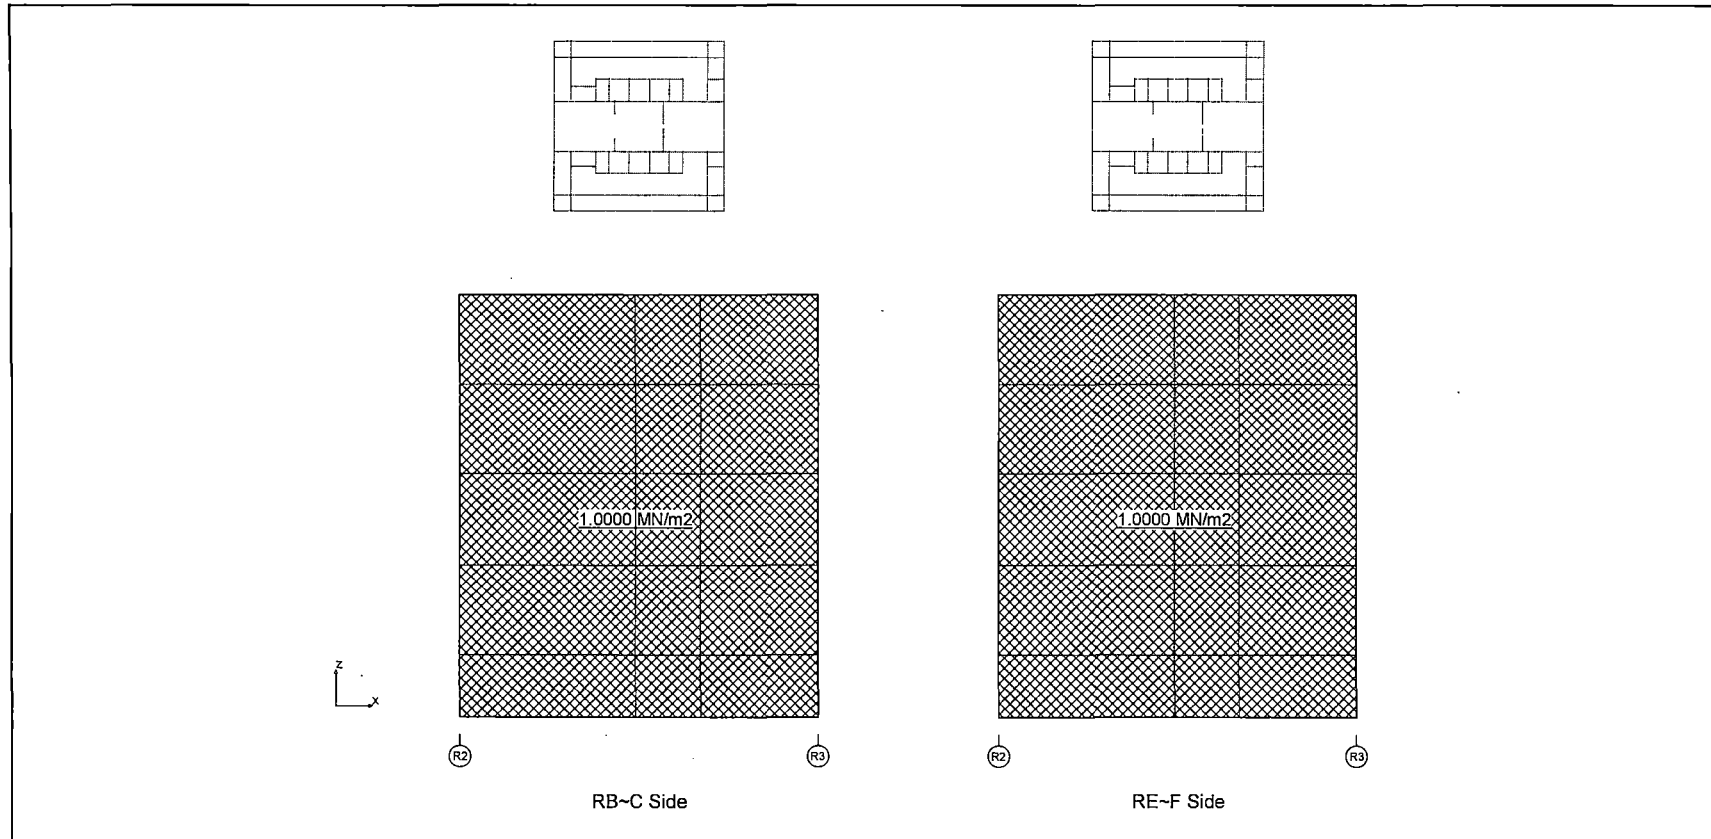


Figure 6.2.3.3-19 Containment Pressure Load (IC/PCCS Pool: Wall-1)



HITACHI

WG3-U71-ERD-S-0004 SH NO. 354
REV. 2 of 543

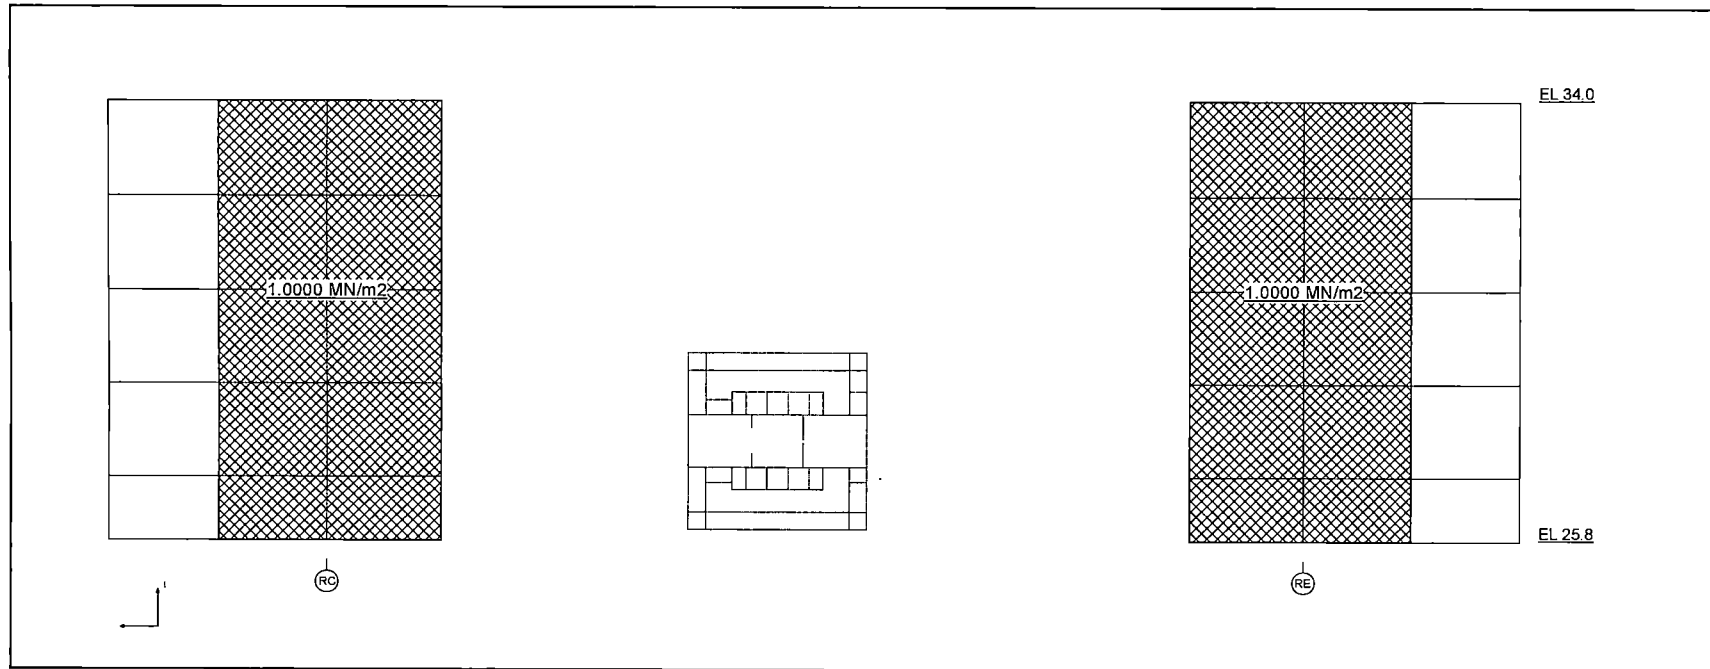


Figure 6.2.3.3-20 Containment Pressure Load (IC/PCCS Pool: Wall-2)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 355

REV. 2

of 543




Figure 6.2.3.3-21 HELB Pressure Load (MS Tunnel: Slab at EL 17,500)

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004

SH NO. 356

REV. 2

of 543




Figure 6.2.3.3-22 HELB Pressure Load (MS Tunnel: Slab at EL 27,000)

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004

SH NO. 357

REV. 2

of 543

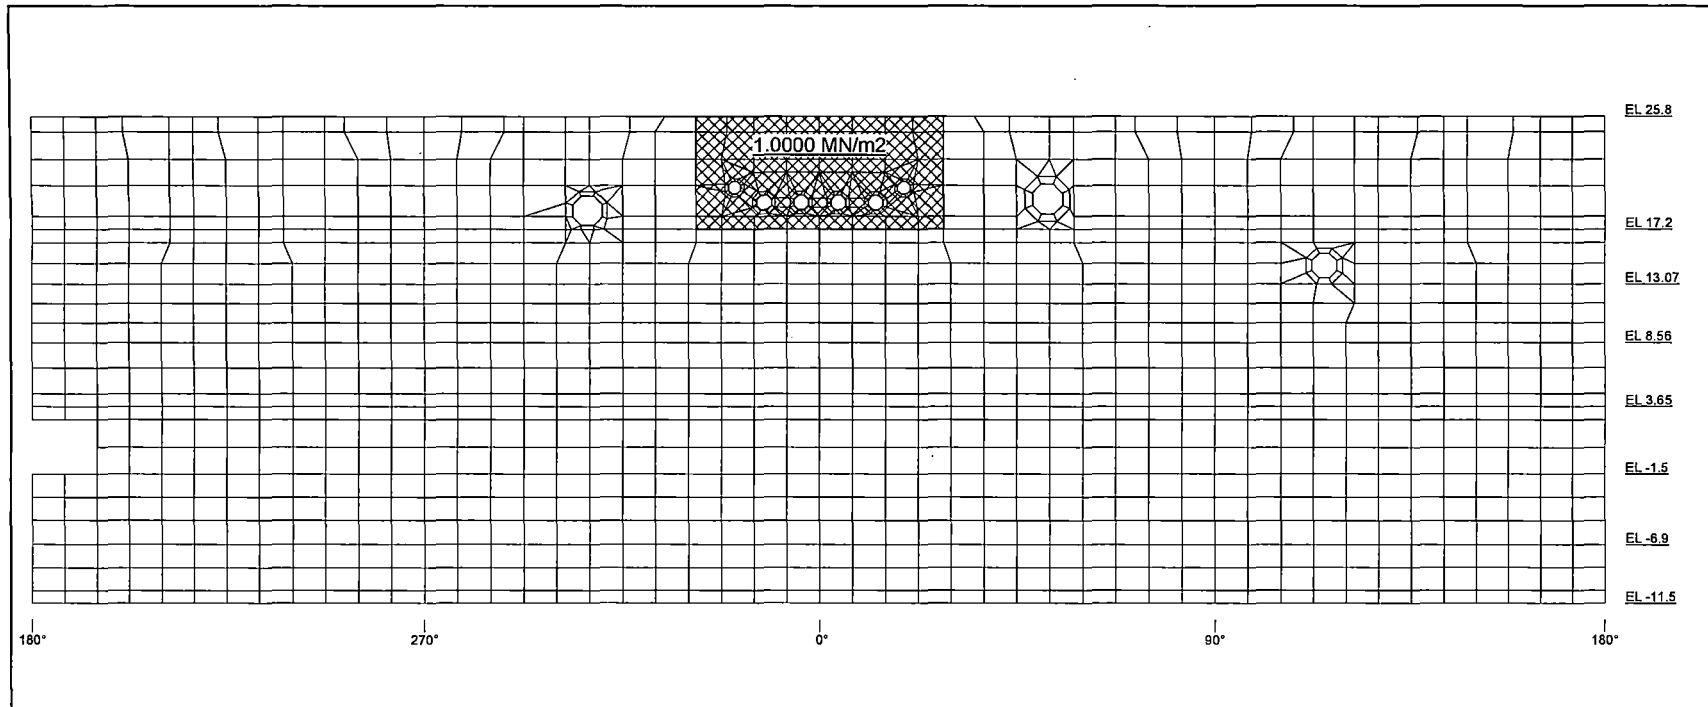


Figure 6.2.3.3-23 HELB Pressure Load (MS Tunnel: RCCV Wall)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 358

REV. 2

of 543

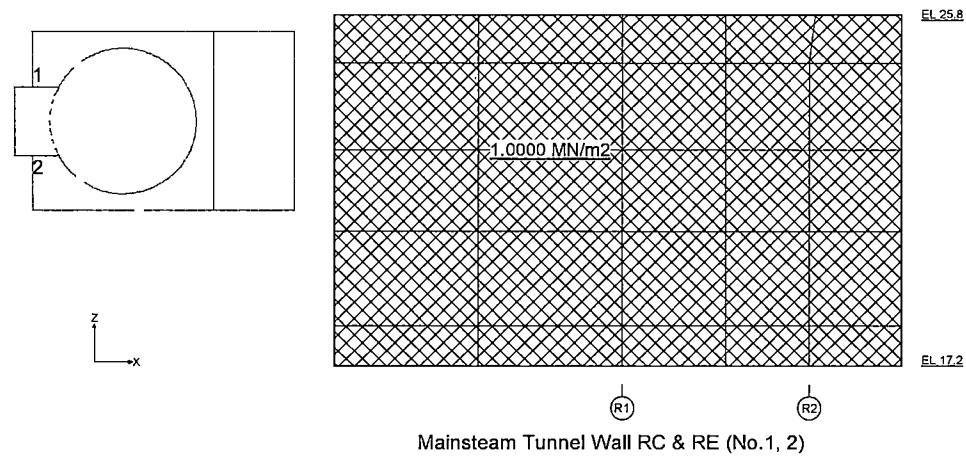


Figure 6.2.3.3-24 HELB Pressure Load (MS Tunnel: Walls)



HITACHI

WG3-U71-ERD-S-0004 SH NO. 359

REV. 2

of 543

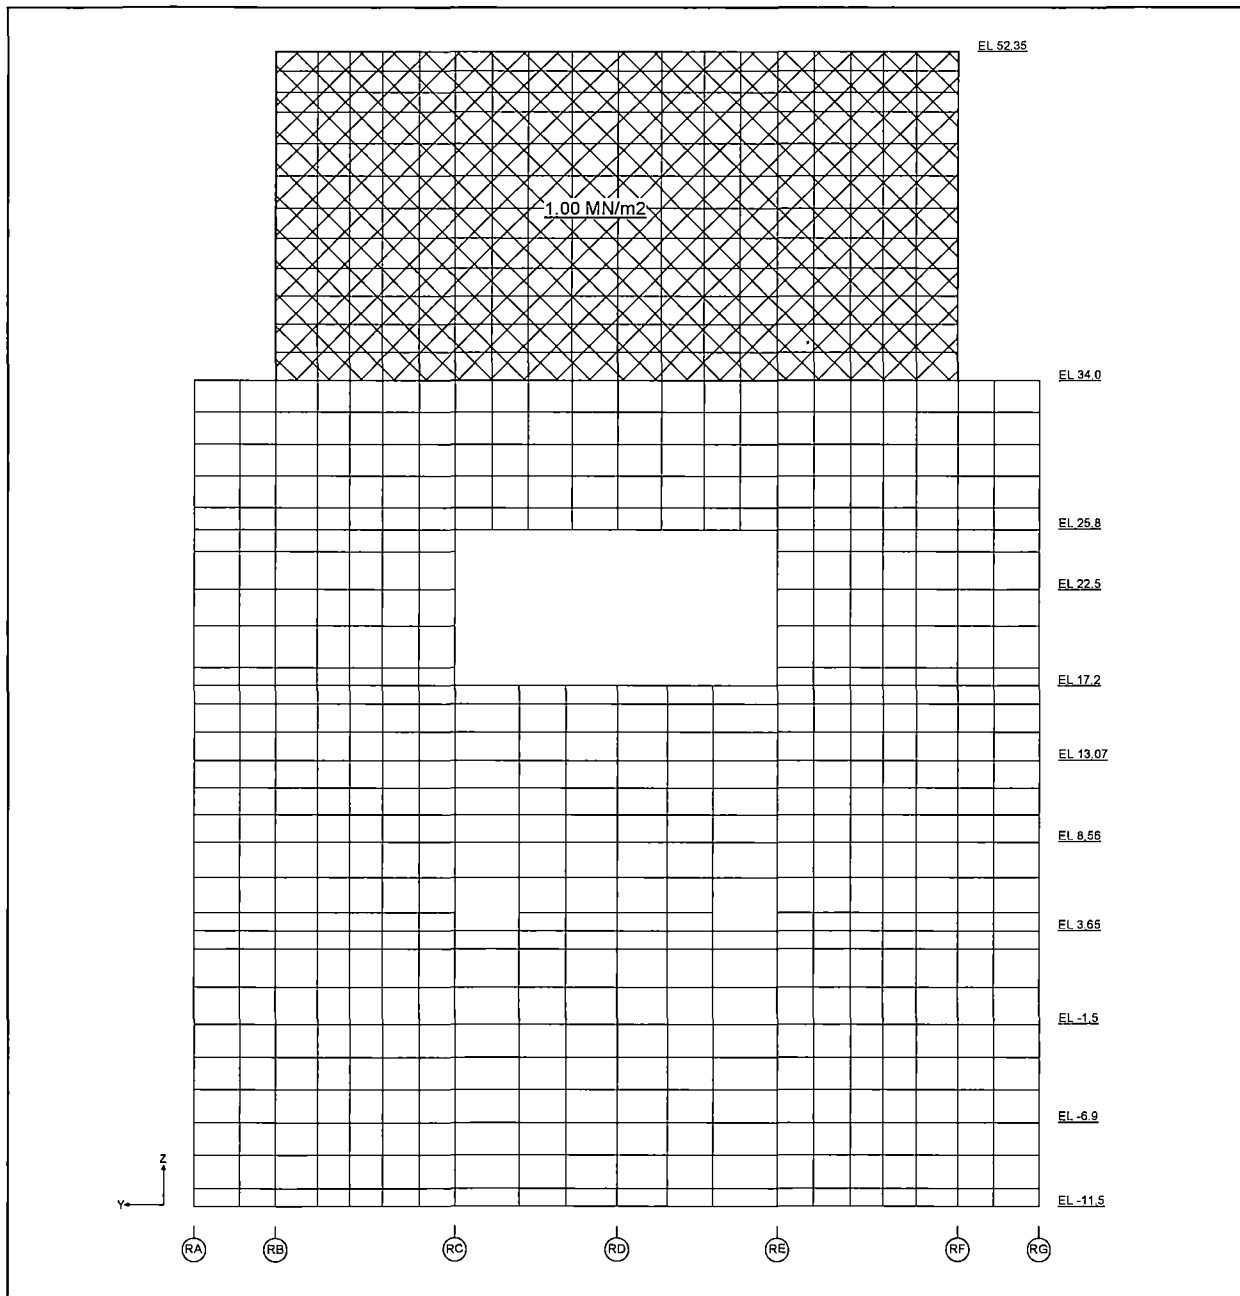


Figure 6.2.3.3-25 HELB Pressure Load (for RB General Rooms: R1 Wall)



HITACHI

WG3-U71-ERD-S-0004 SH NO. 360

REV. 2

of 543

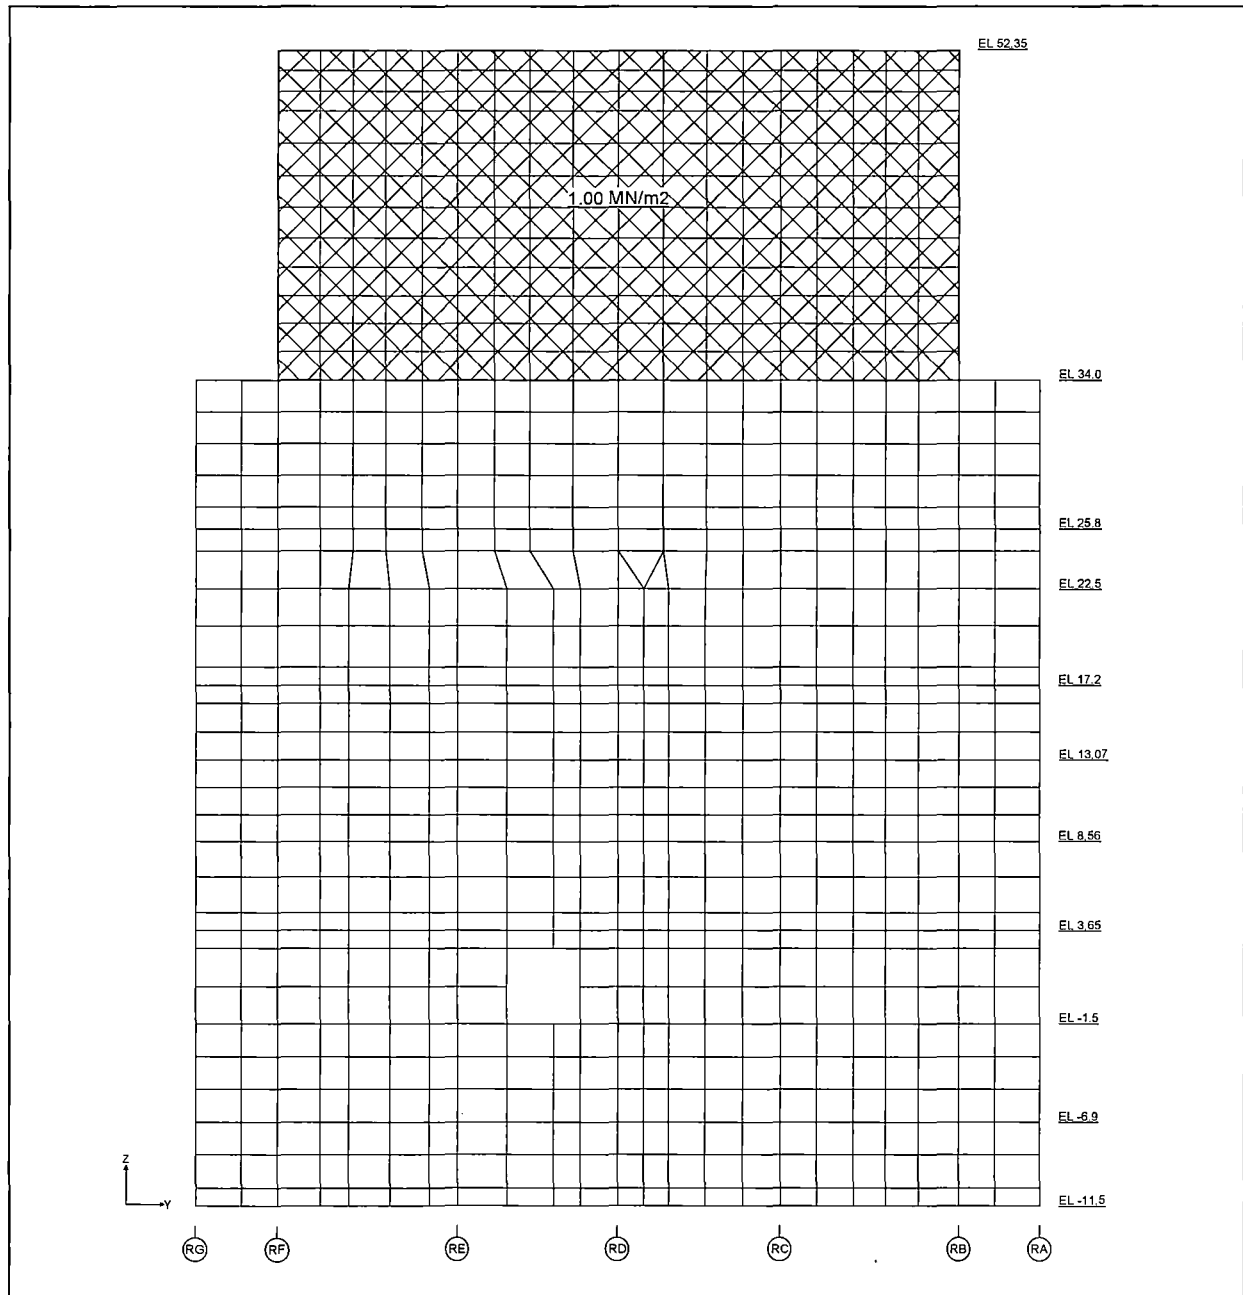


Figure 6.2.3.3-26 HELB Pressure Load (for RB General Rooms: R7 Wall)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 361

REV. 2

of 543

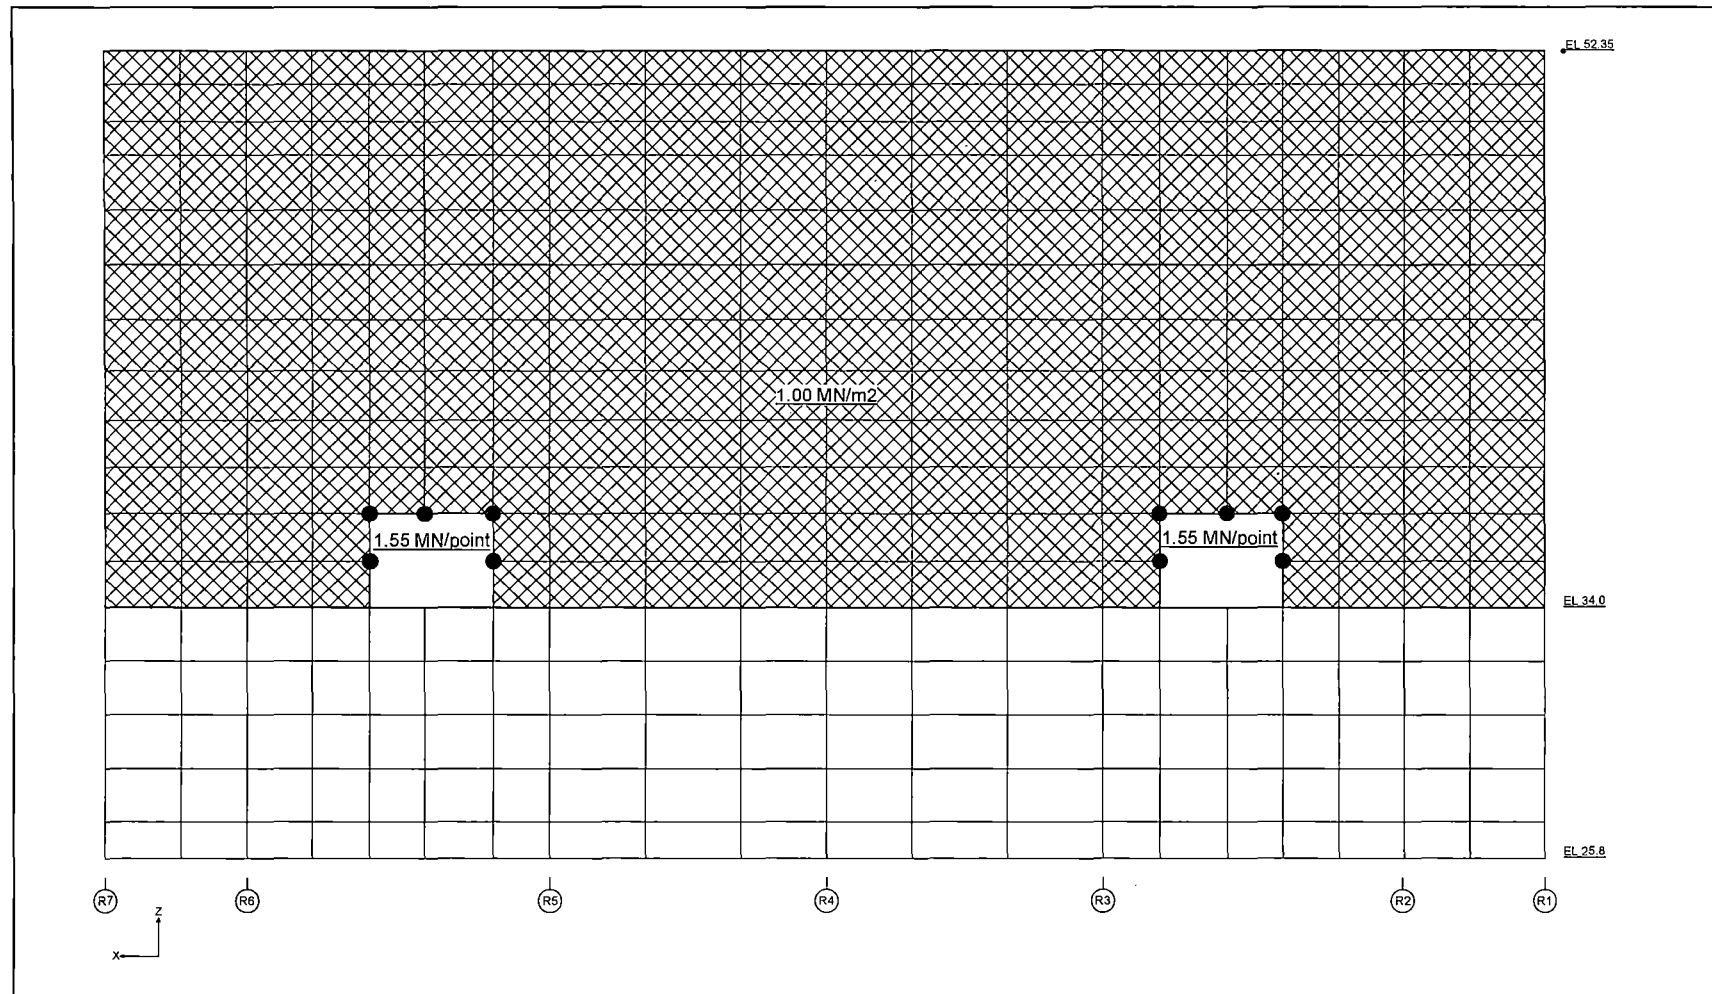


Figure 6.2.3.3-27 HELB Pressure Load (for RB General Rooms: RB Wall)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 362

REV. 2

of 543

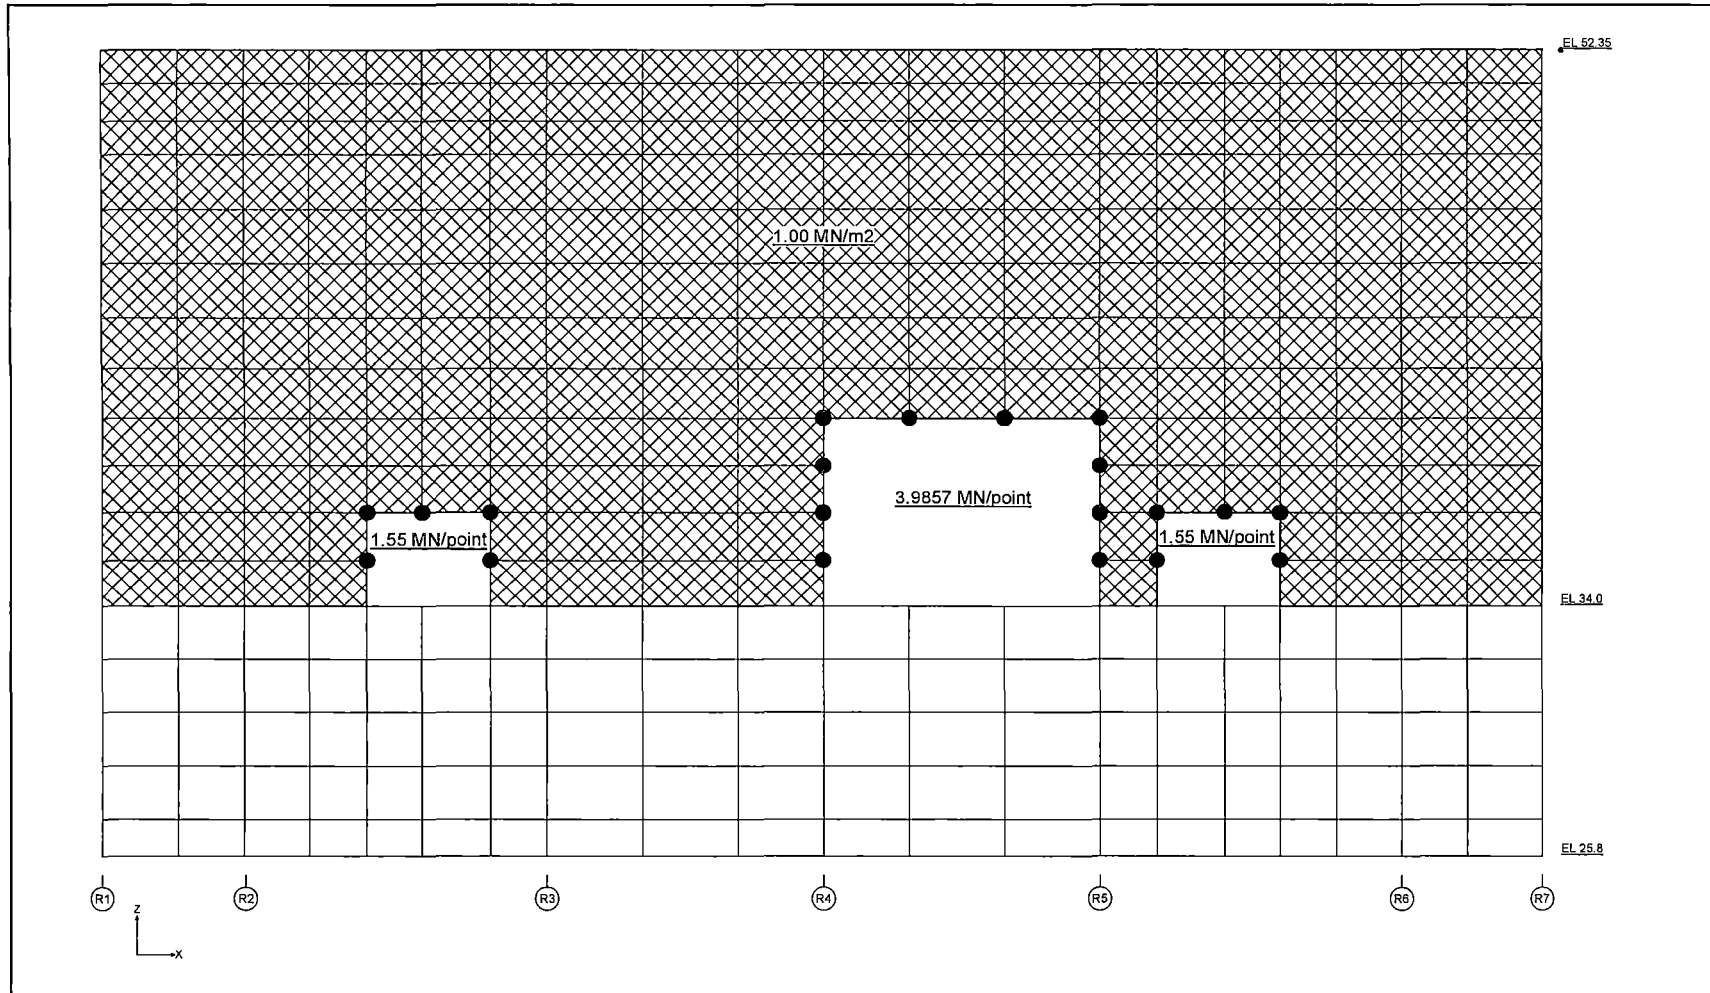


Figure 6.2.3.3-28 HELB Pressure Load (for RB General Rooms: RF Wall)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 363

REV. 2

of 543

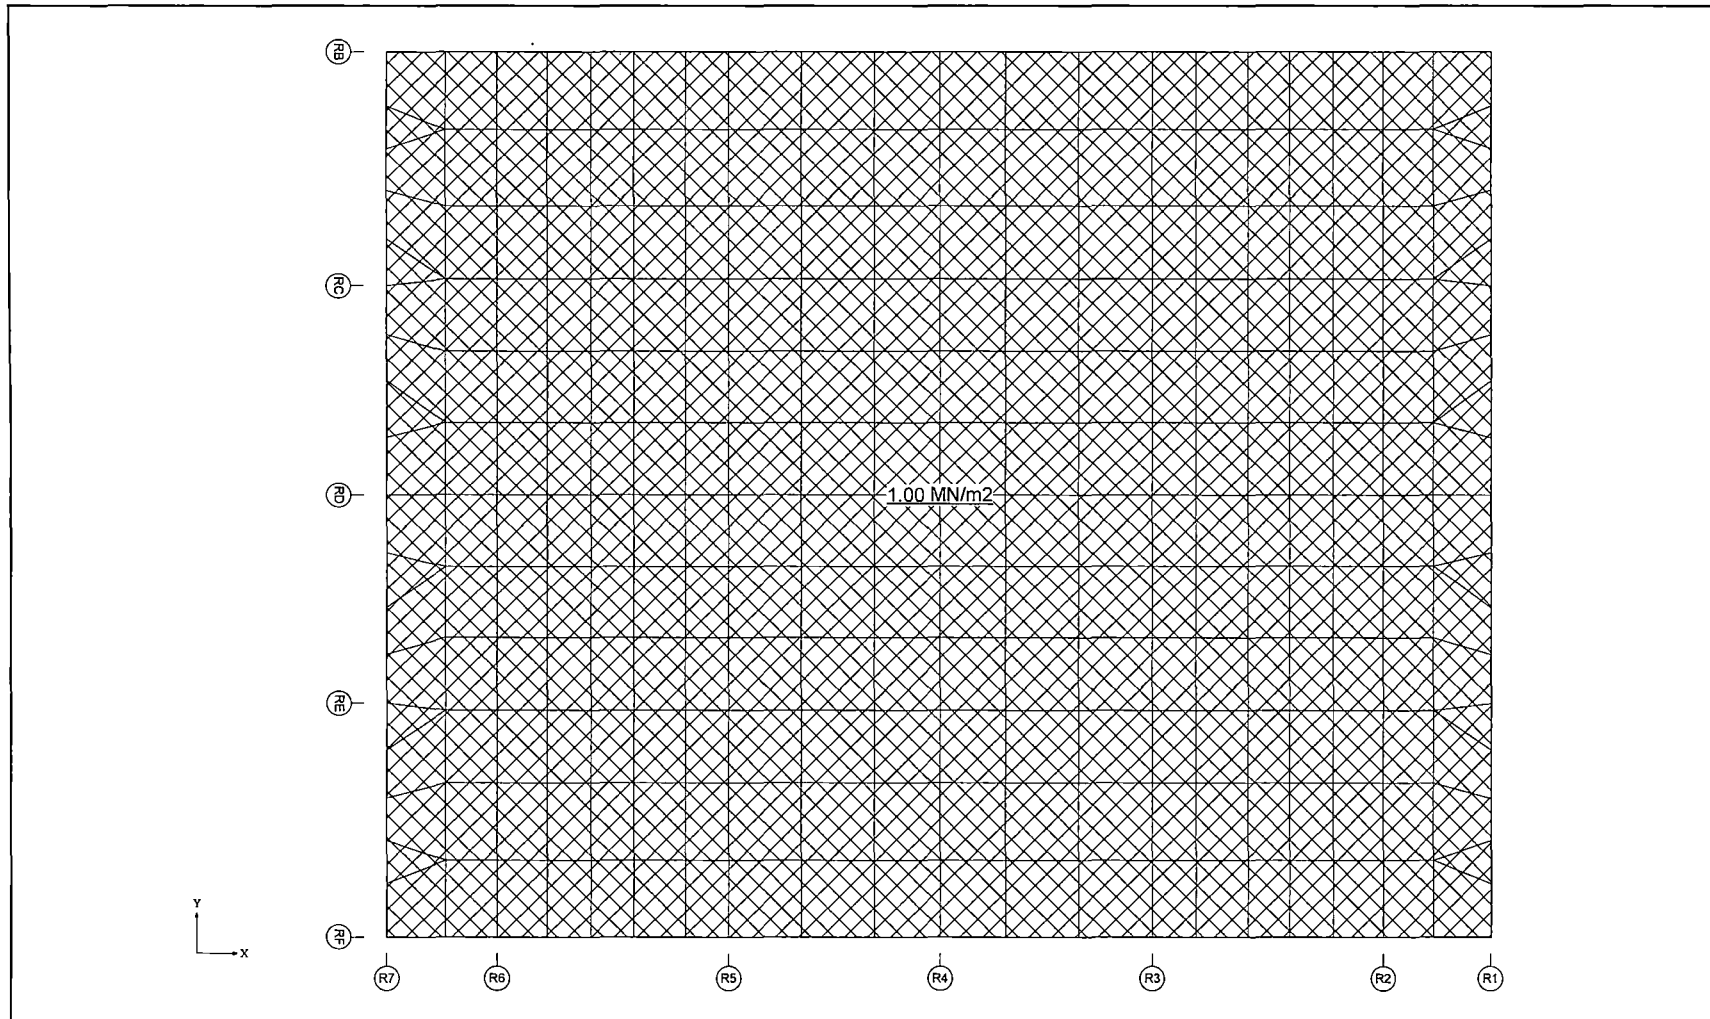


Figure 6.2.3.3-29 HELB Pressure Load (for RB General Rooms: Roof)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 364

REV. 2

of 543

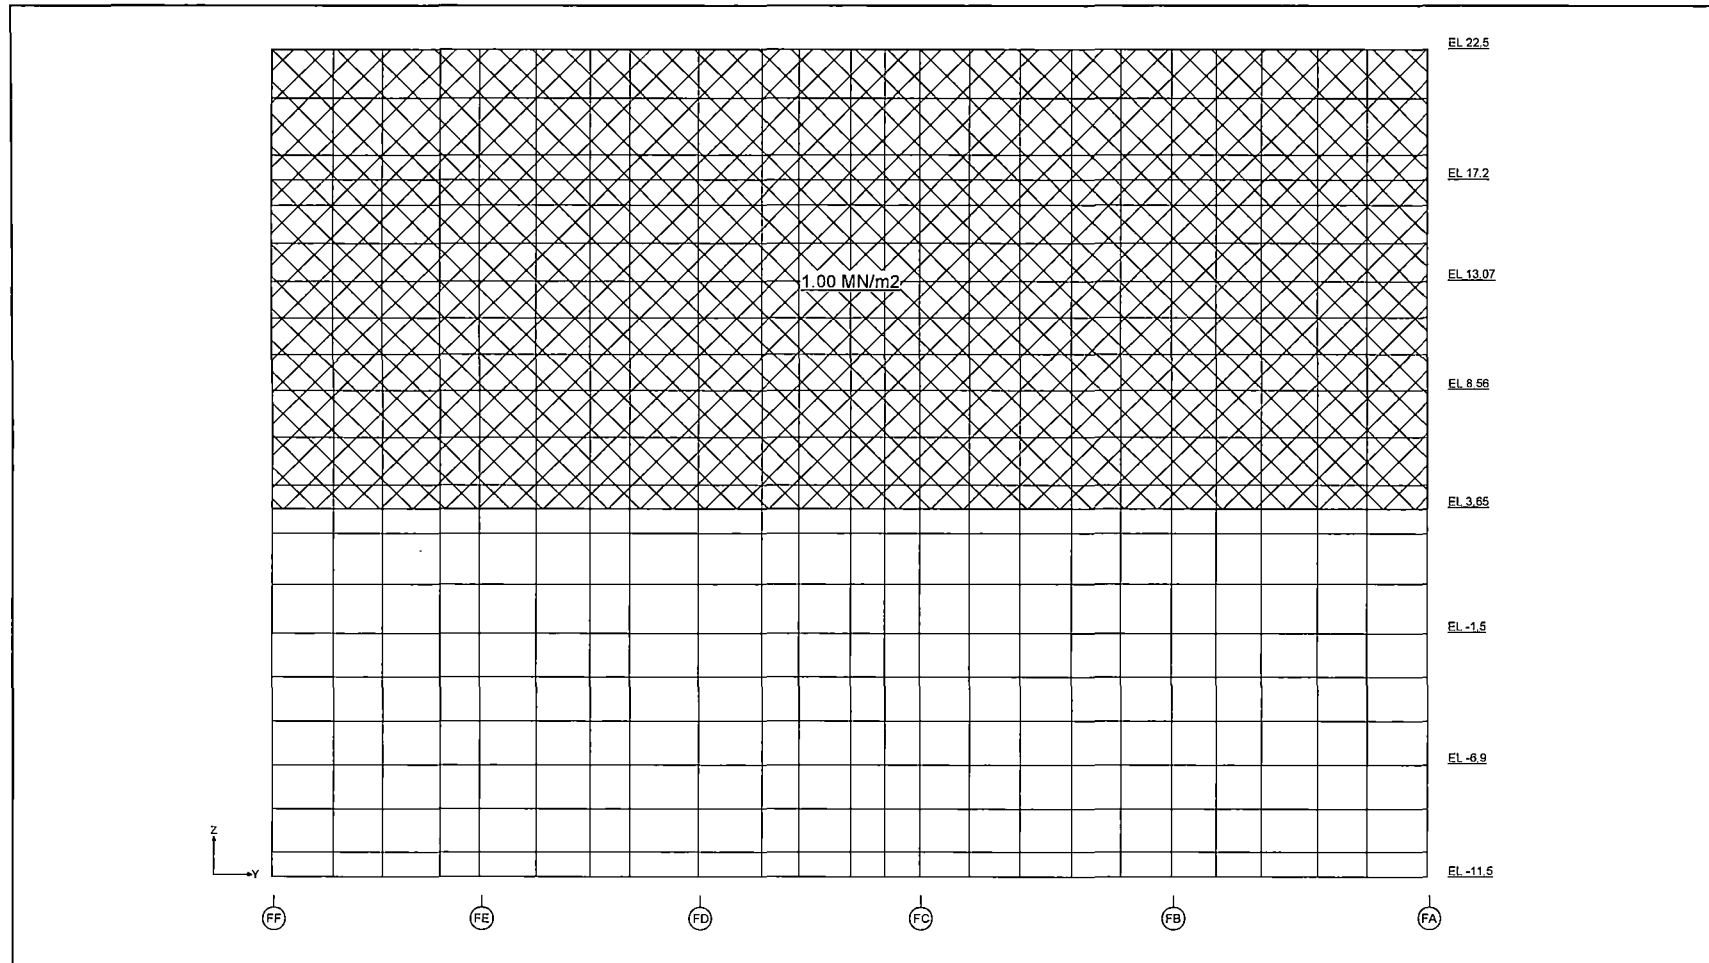


Figure 6.2.3.3-30 HELB Pressure Load (for FB General Rooms: F3 Wall)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 365

REV. 2

of 543

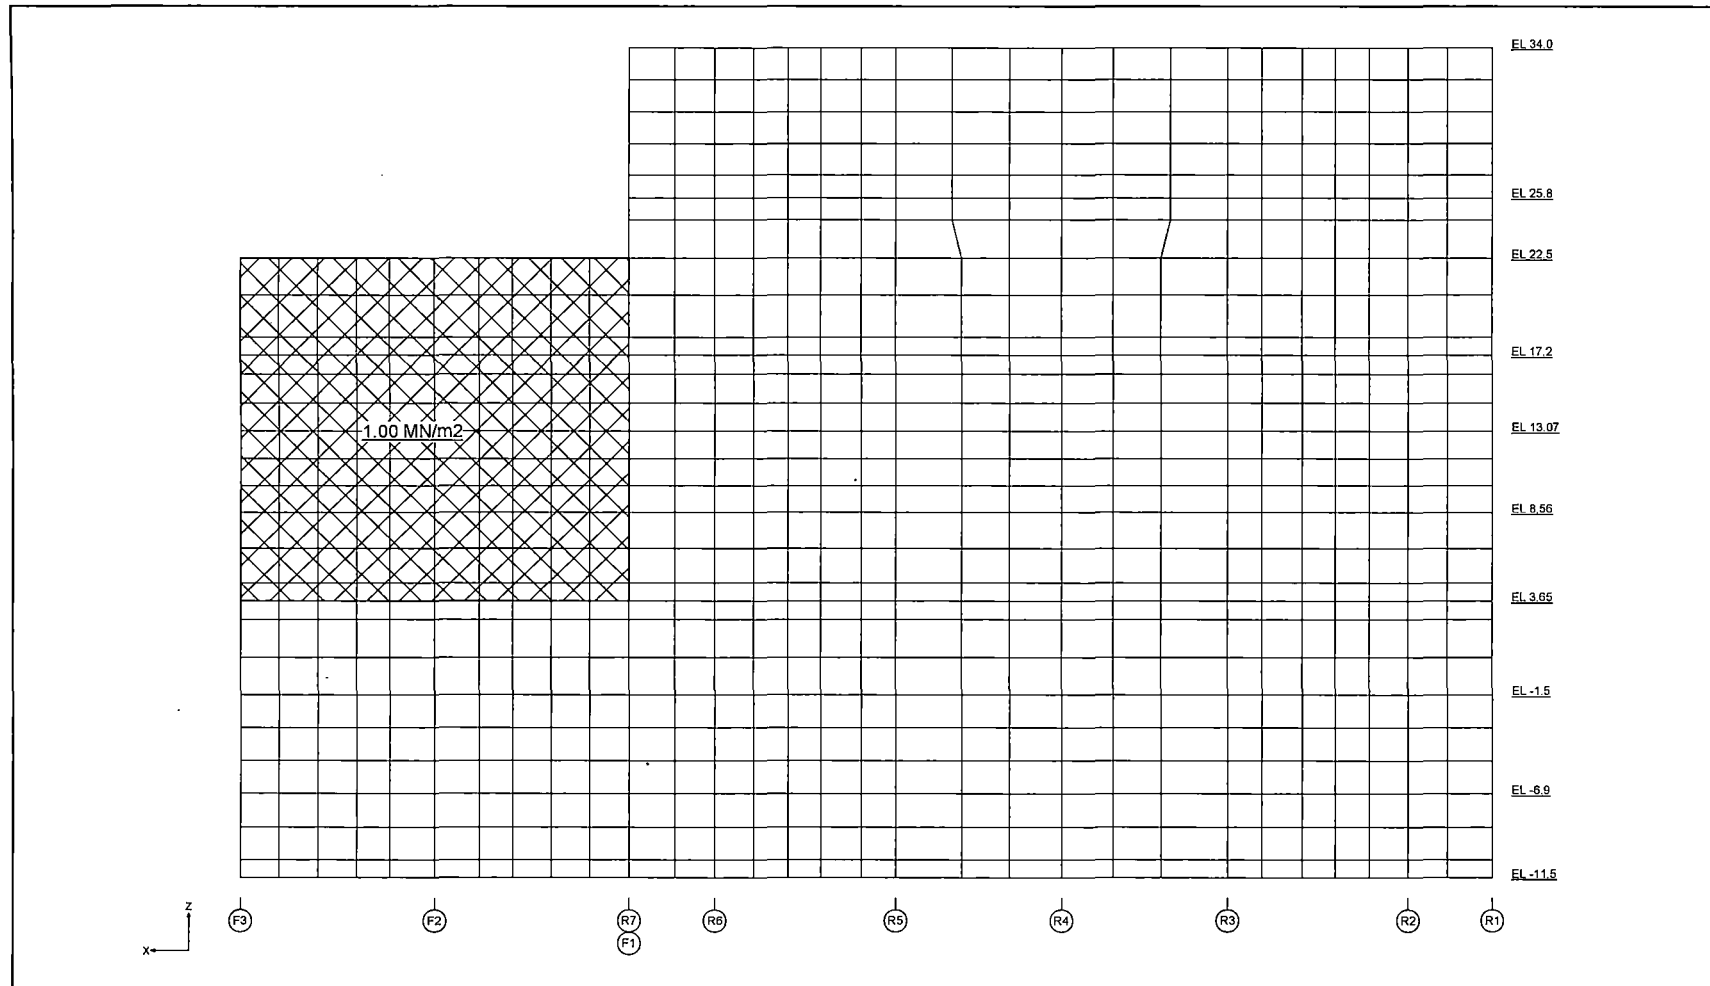


Figure 6.2.3.3-31 HELB Pressure Load (for FB General Rooms: FA Wall)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 366

REV. 2

of 543

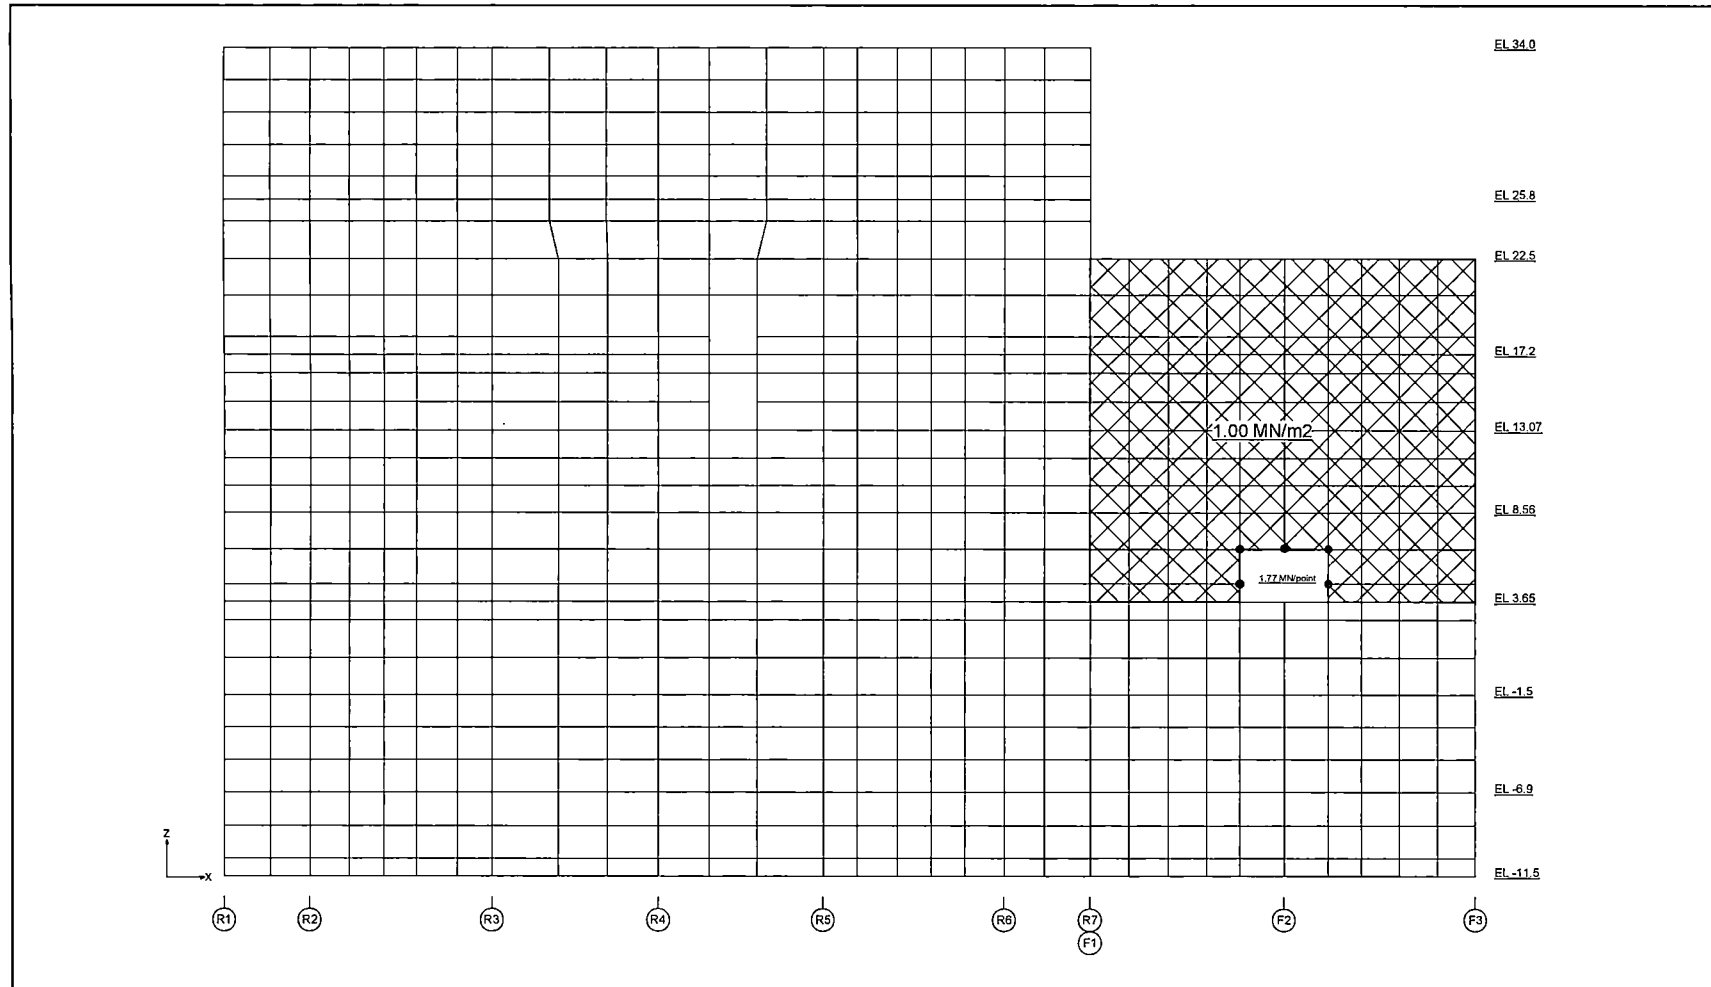


Figure 6.2.3.3-32 HEL B Pressure Load (for FB General Rooms: FF Wall)



HITACHI

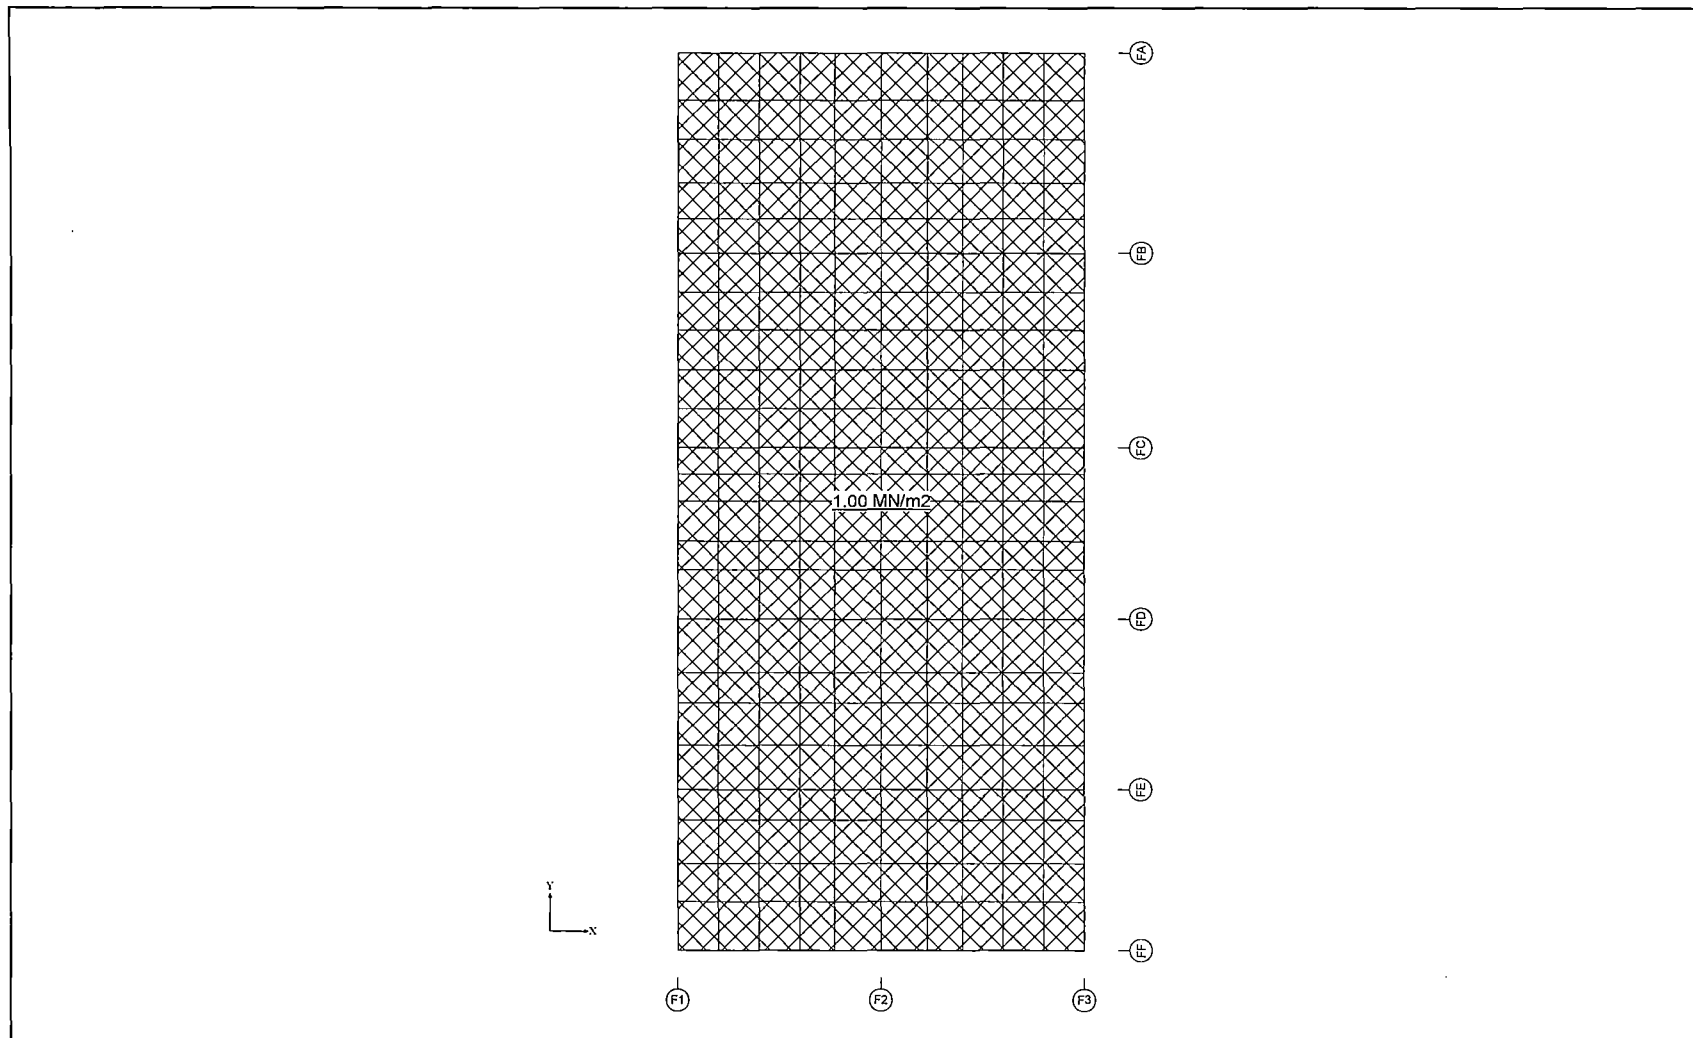


Figure 6.2.3.3-33 HELB Pressure Load (for FB General Rooms: Slab at EL 22500)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 368

REV. 2

of 543

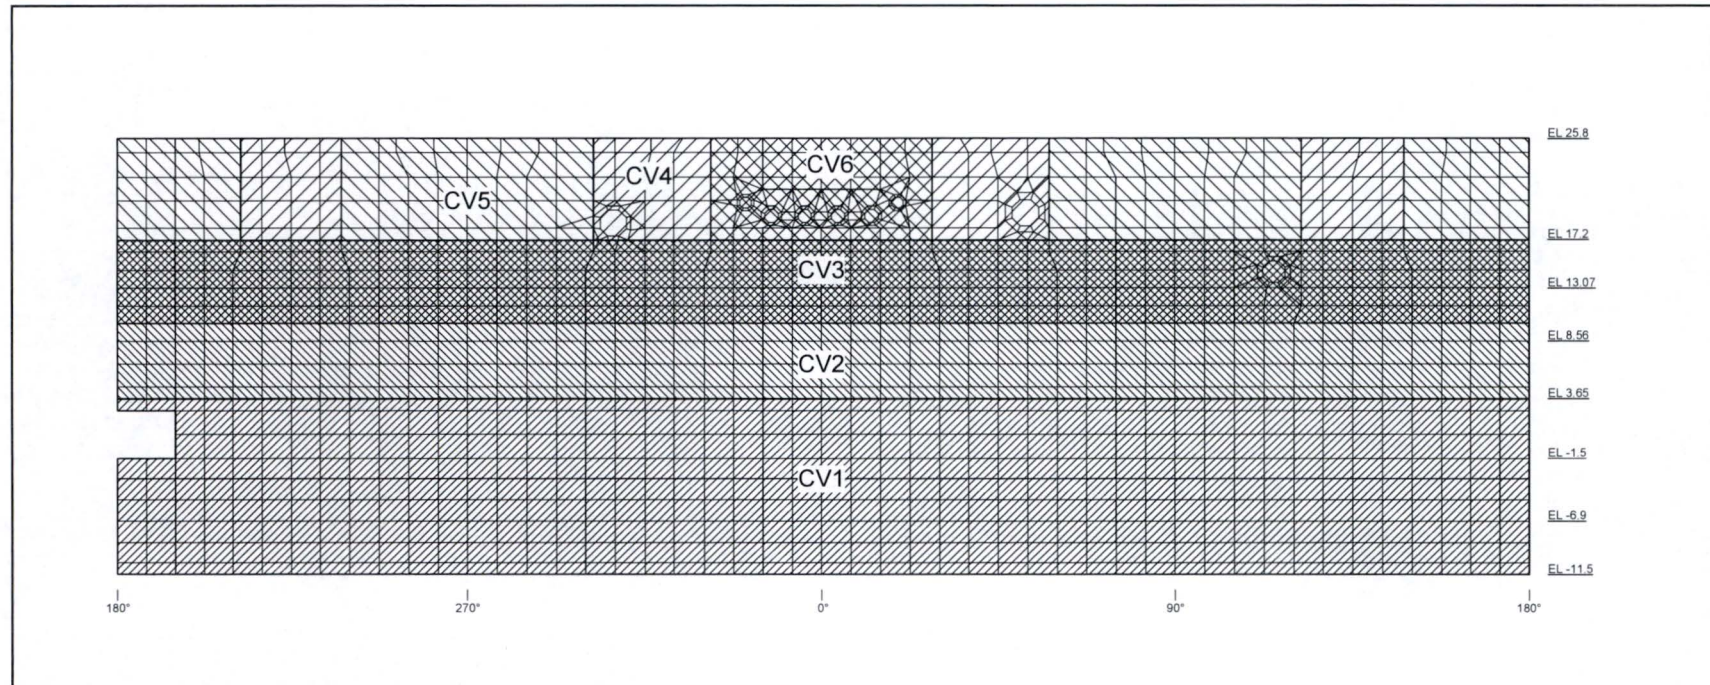


Figure 6.2.3.4-1 Application of Thermal Load on the RCCV Wall (Normal Operation)

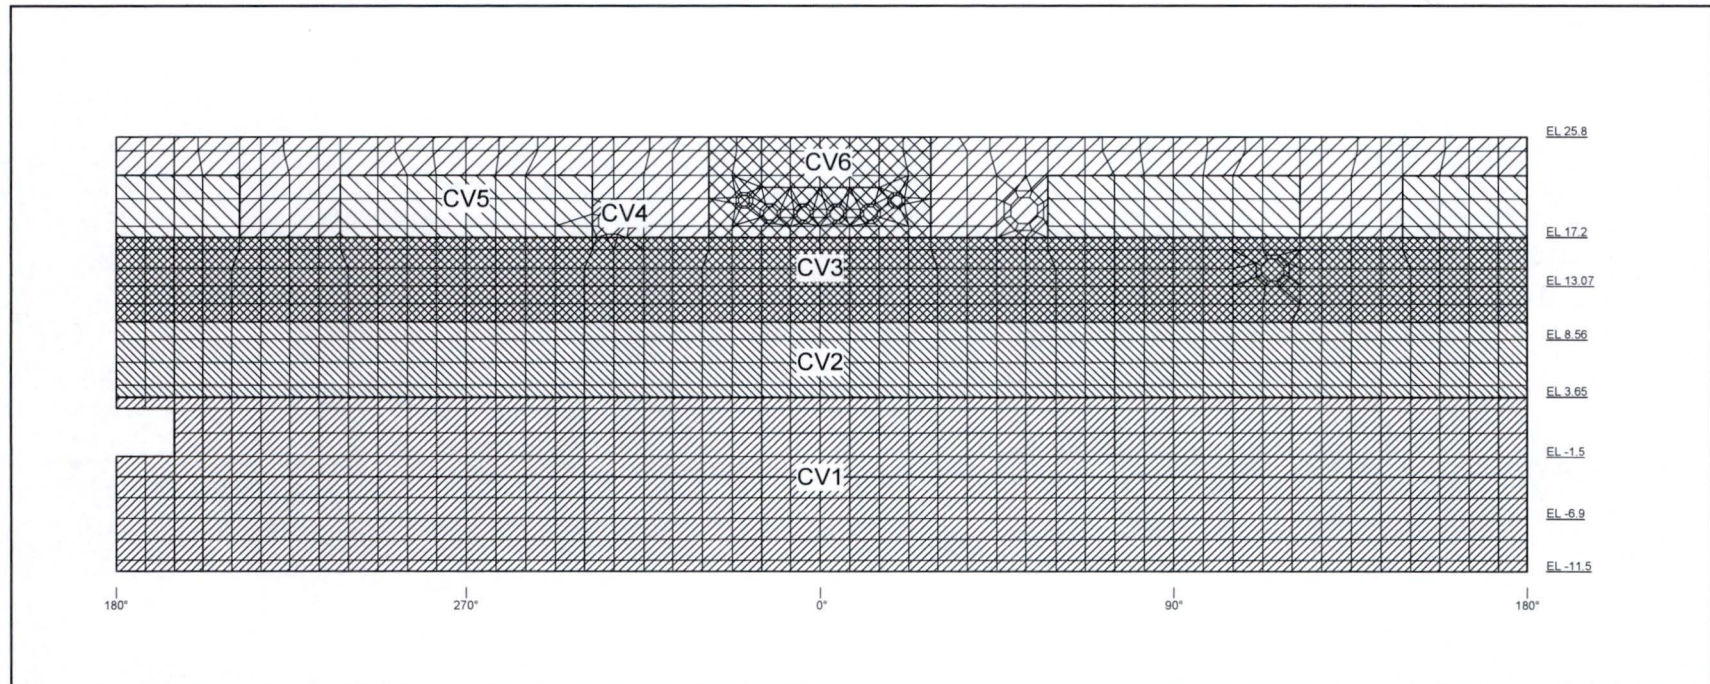


Figure 6.2.3.4-2 Application of Thermal Load on the RCCV Wall (LOCA Condition 1)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 370

REV. 2

of 543

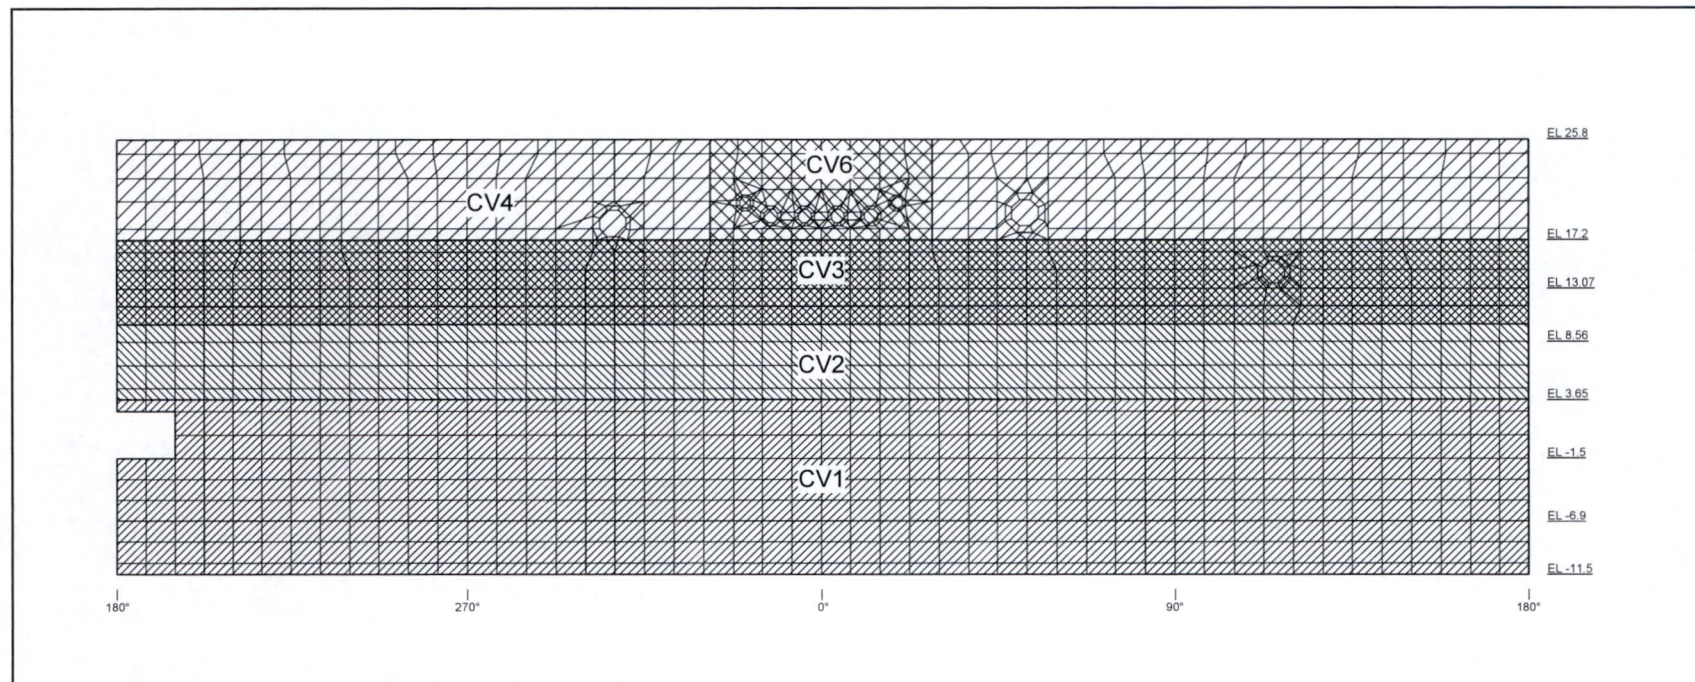


Figure 6.2.3.4-3 Application of Thermal Load on the RCCV Wall (LOCA Condition 2)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 371

REV. 2

of 543

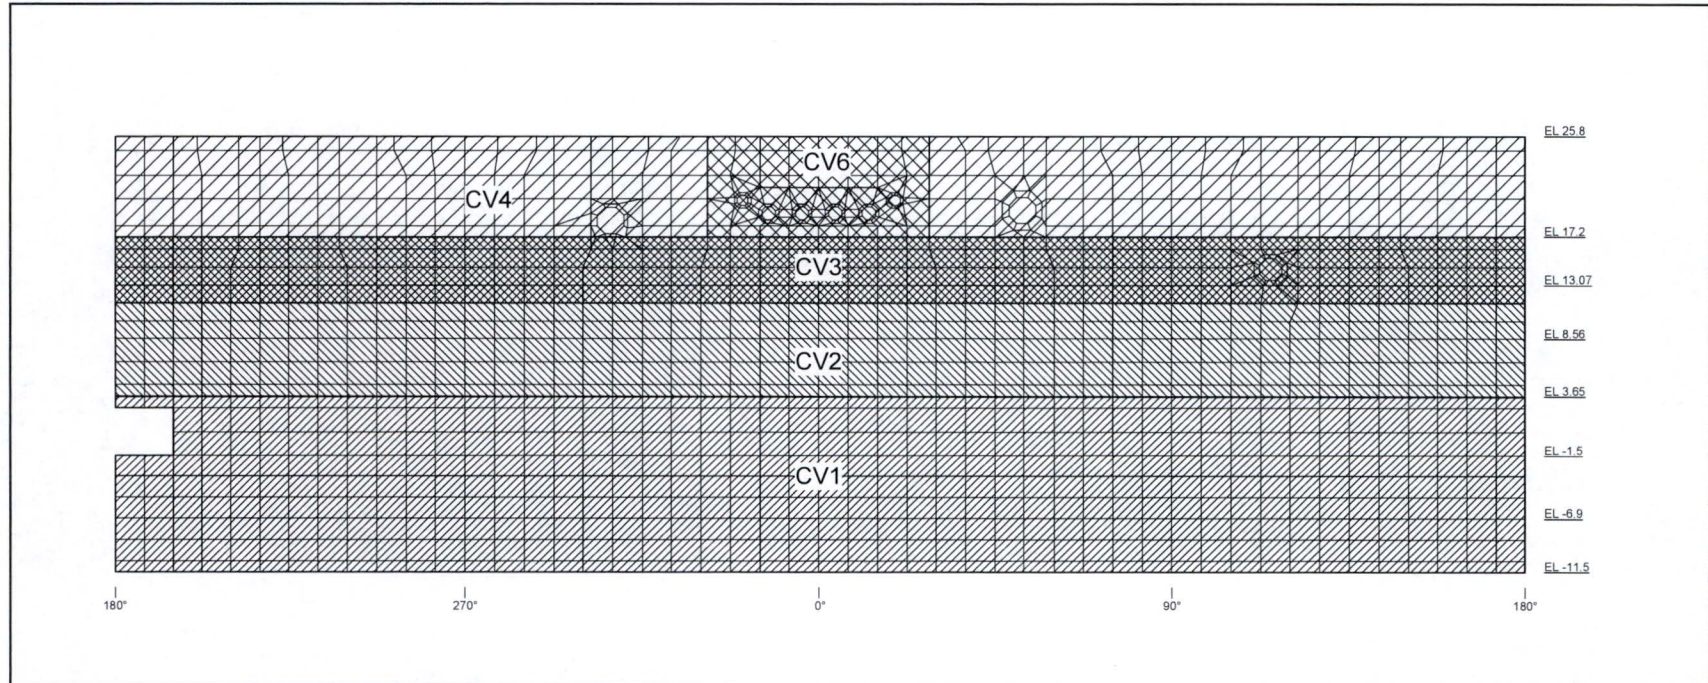



Figure 6.2.3.4-4 Application of Thermal Load on the RCCV Wall (LOCA Flooding Condition 3)



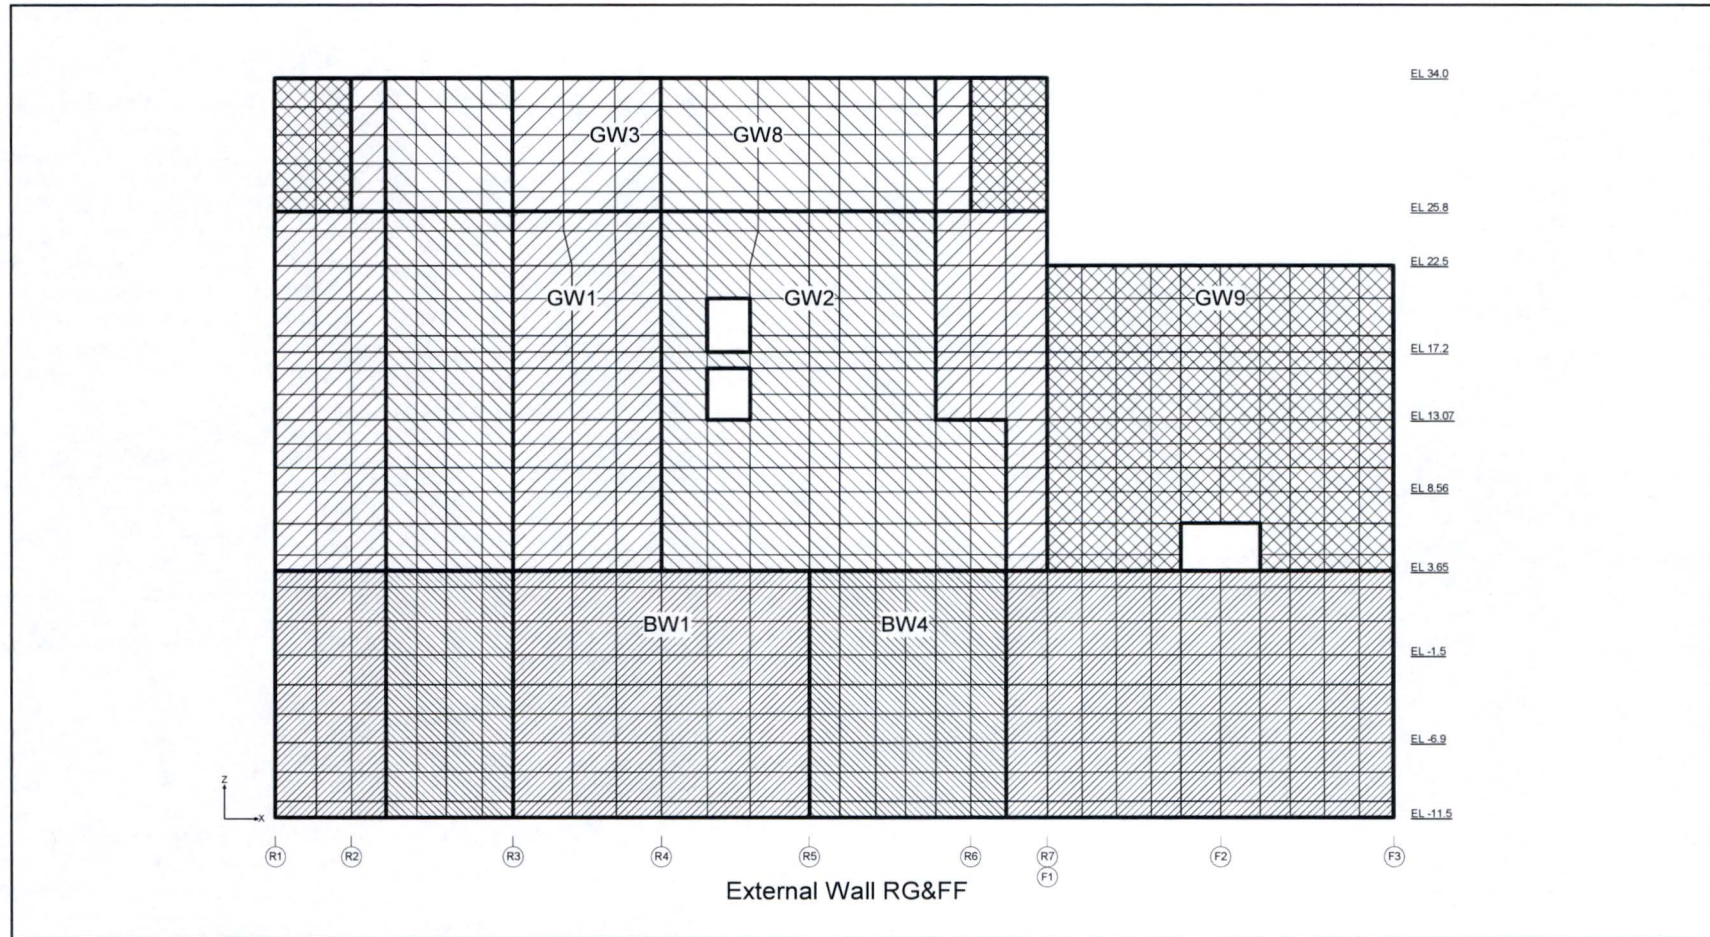


Figure 6.2.3.4-6 Application of Thermal Load on the External Wall (RG/FF)

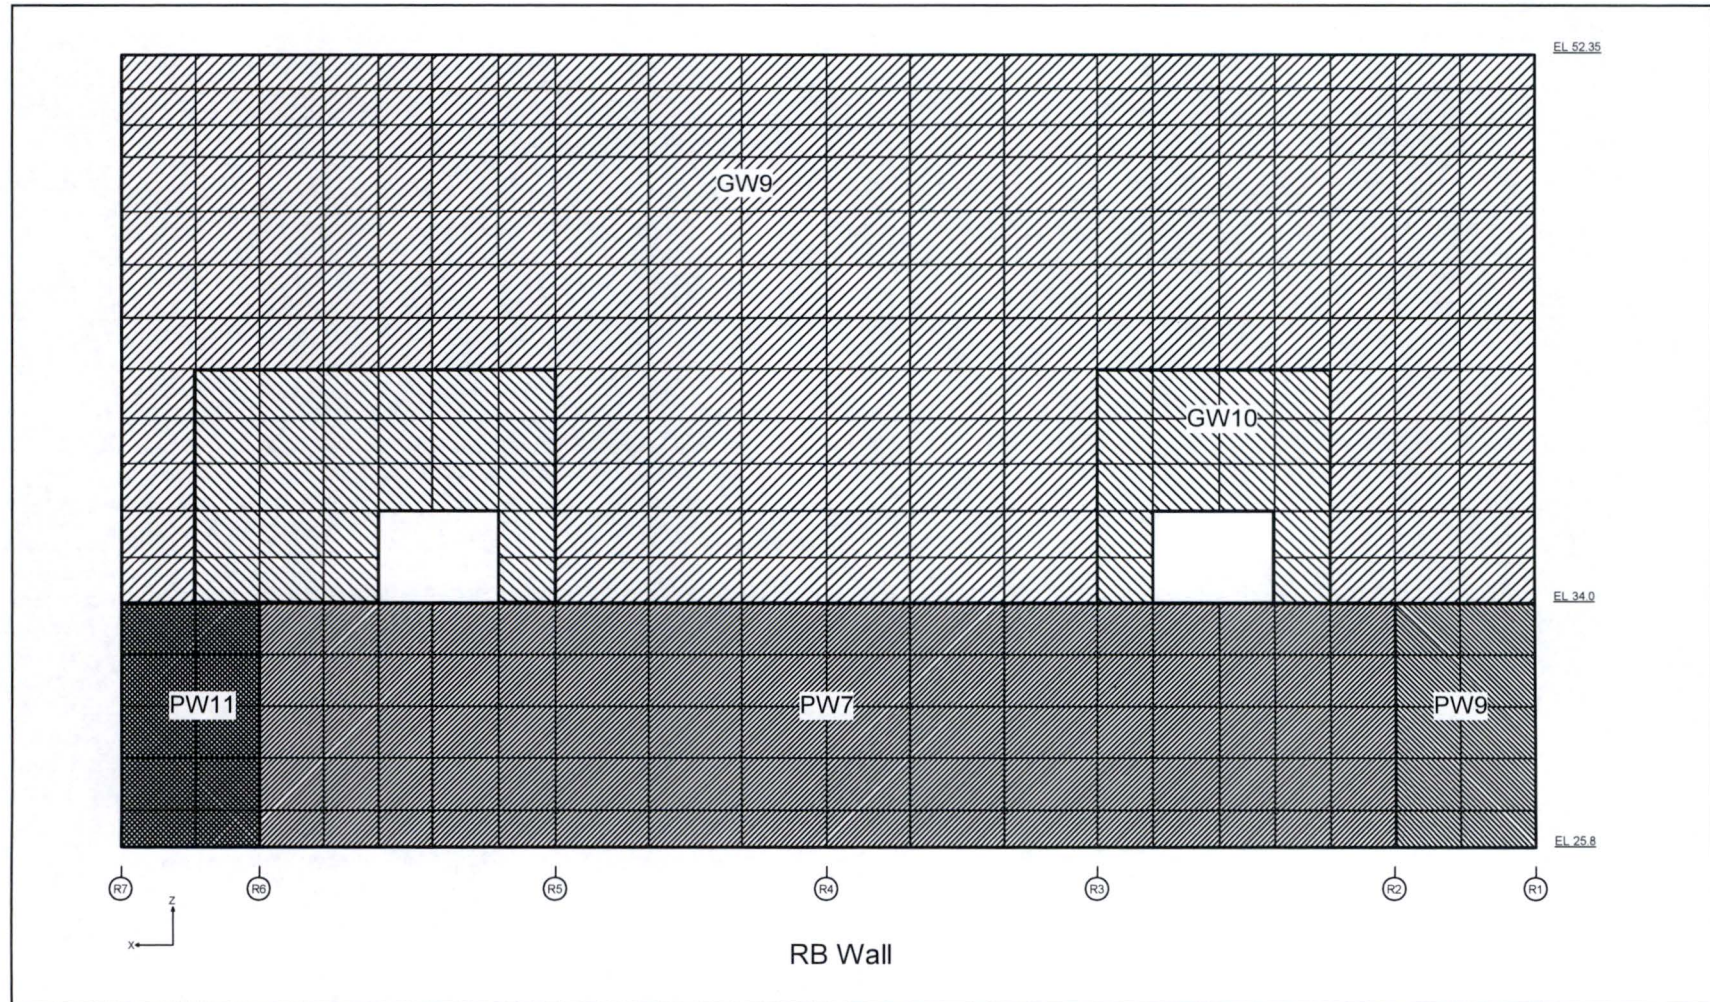


Figure 6.2.3.4-7 Application of Thermal Load on the External Wall (RB)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 375

REV. 2

of 543

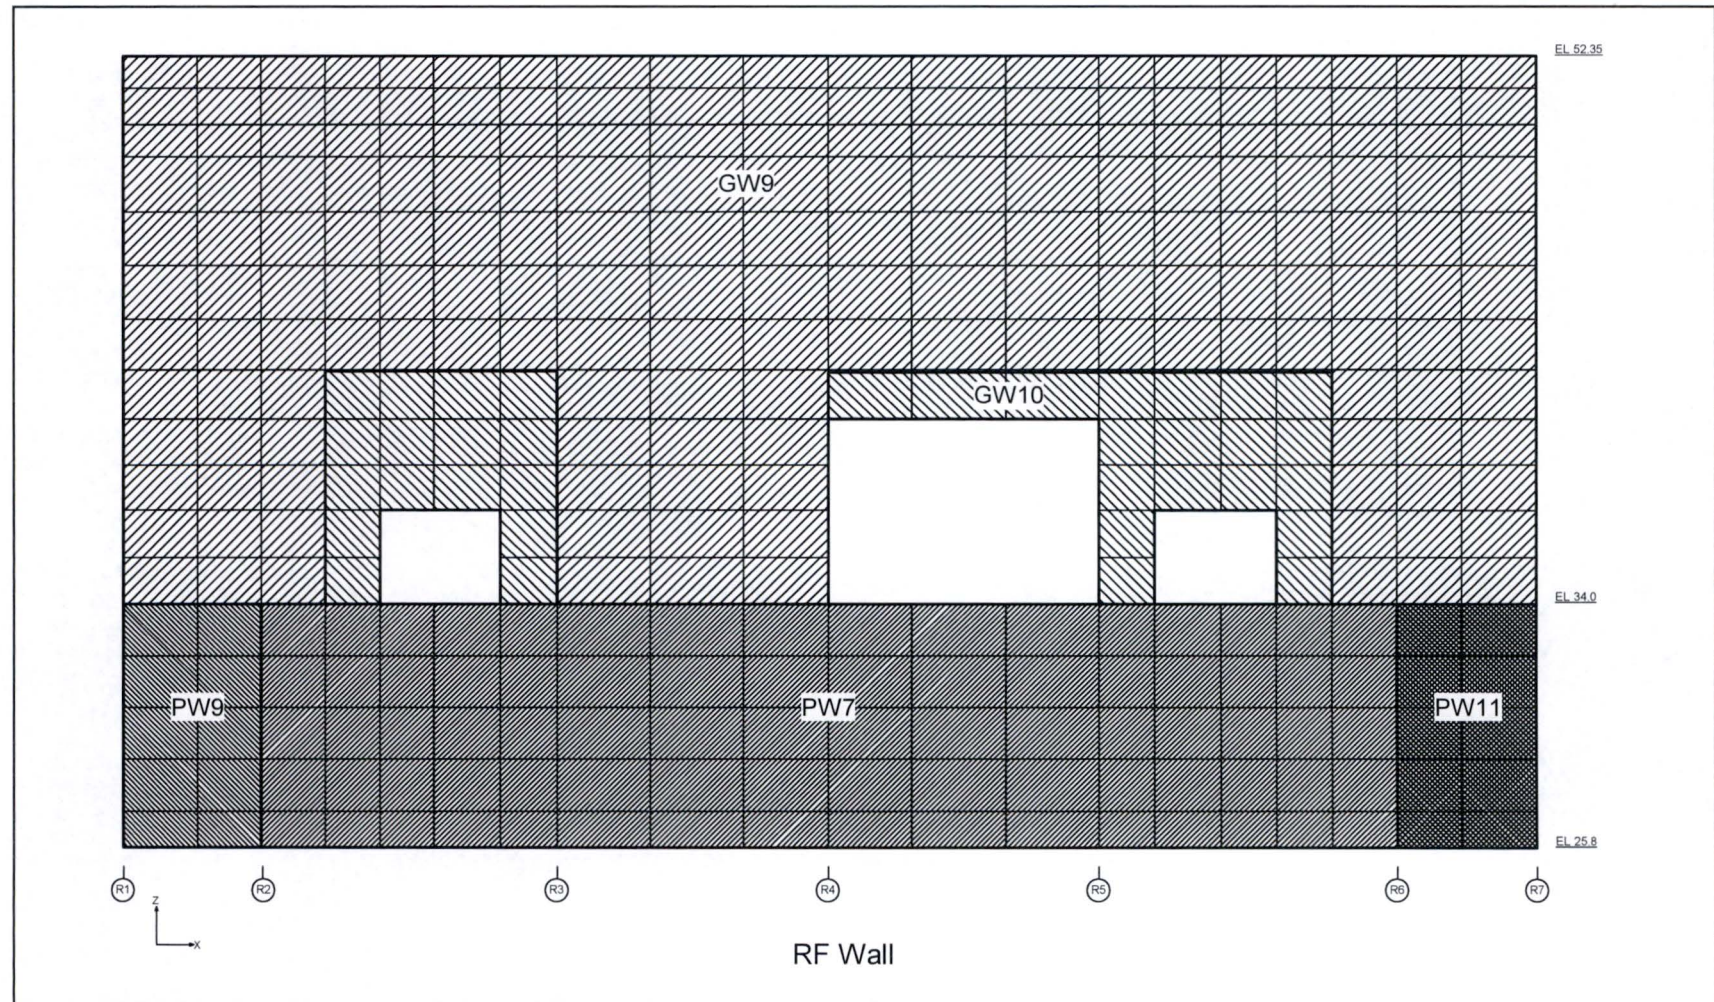


Figure 6.2.3.4-8 Application of Thermal Load on the External Wall (RF)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 376

REV. 2

of 543

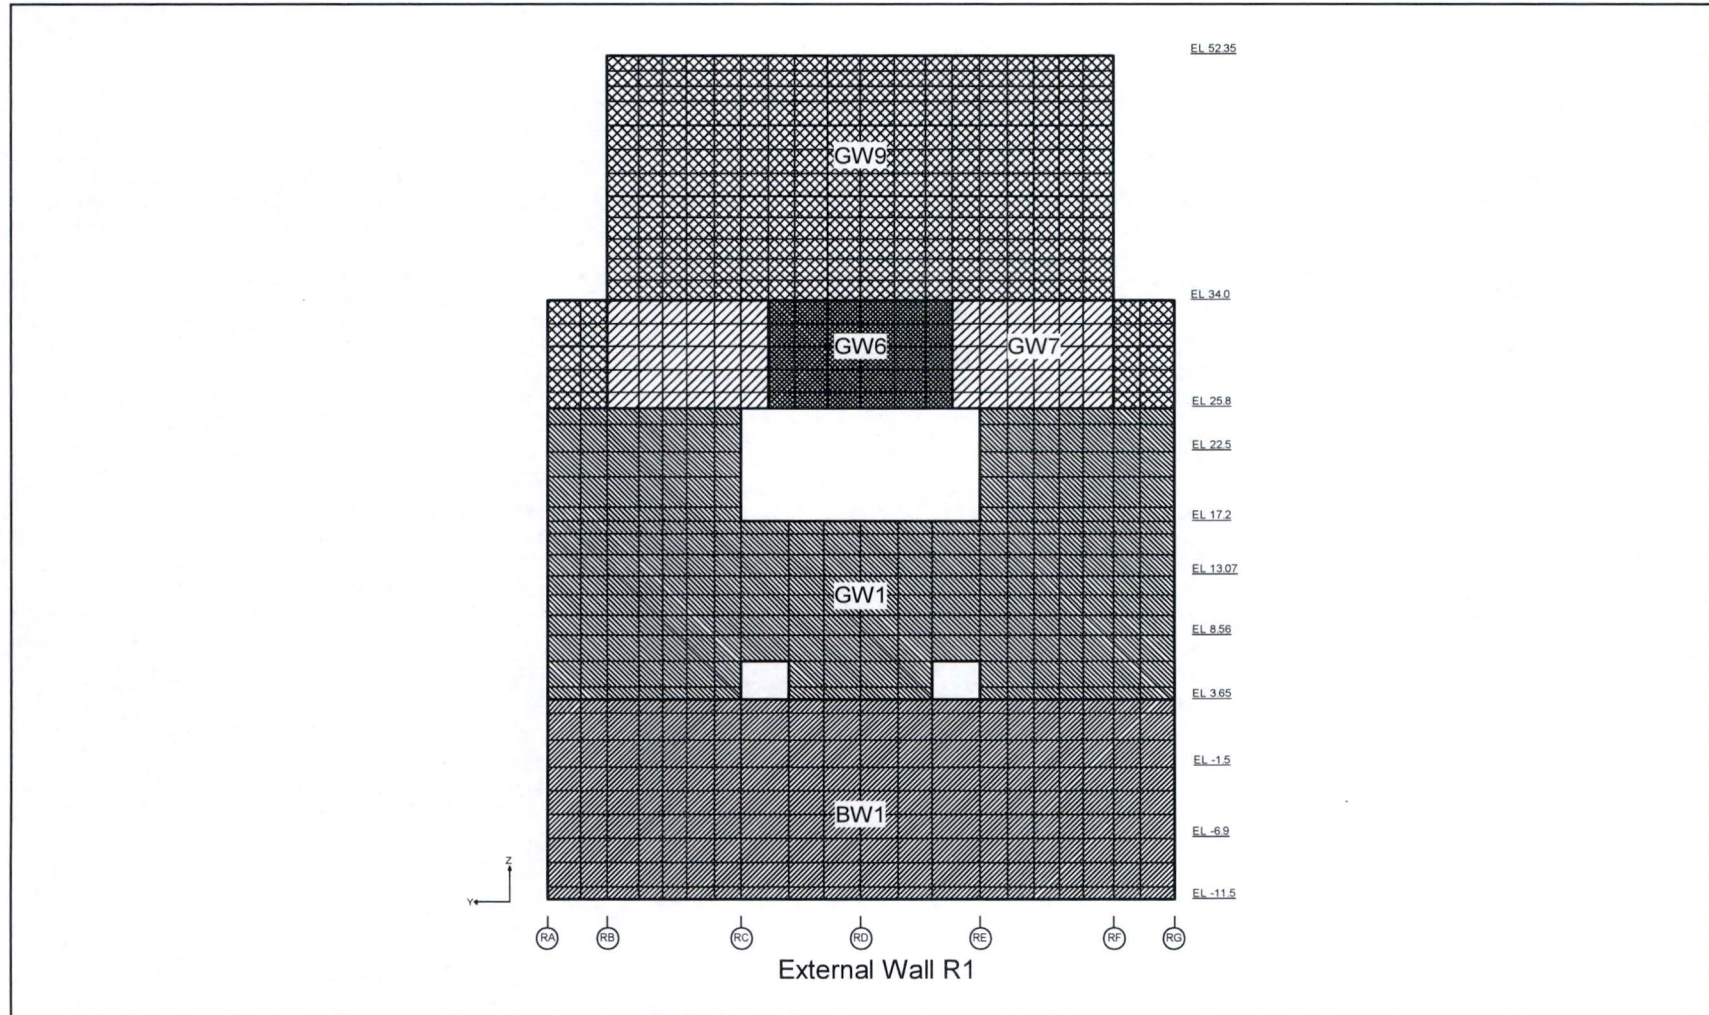


Figure 6.2.3.4-9 Application of Thermal Load on the External Wall (R1)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 377

REV. 2

of 543

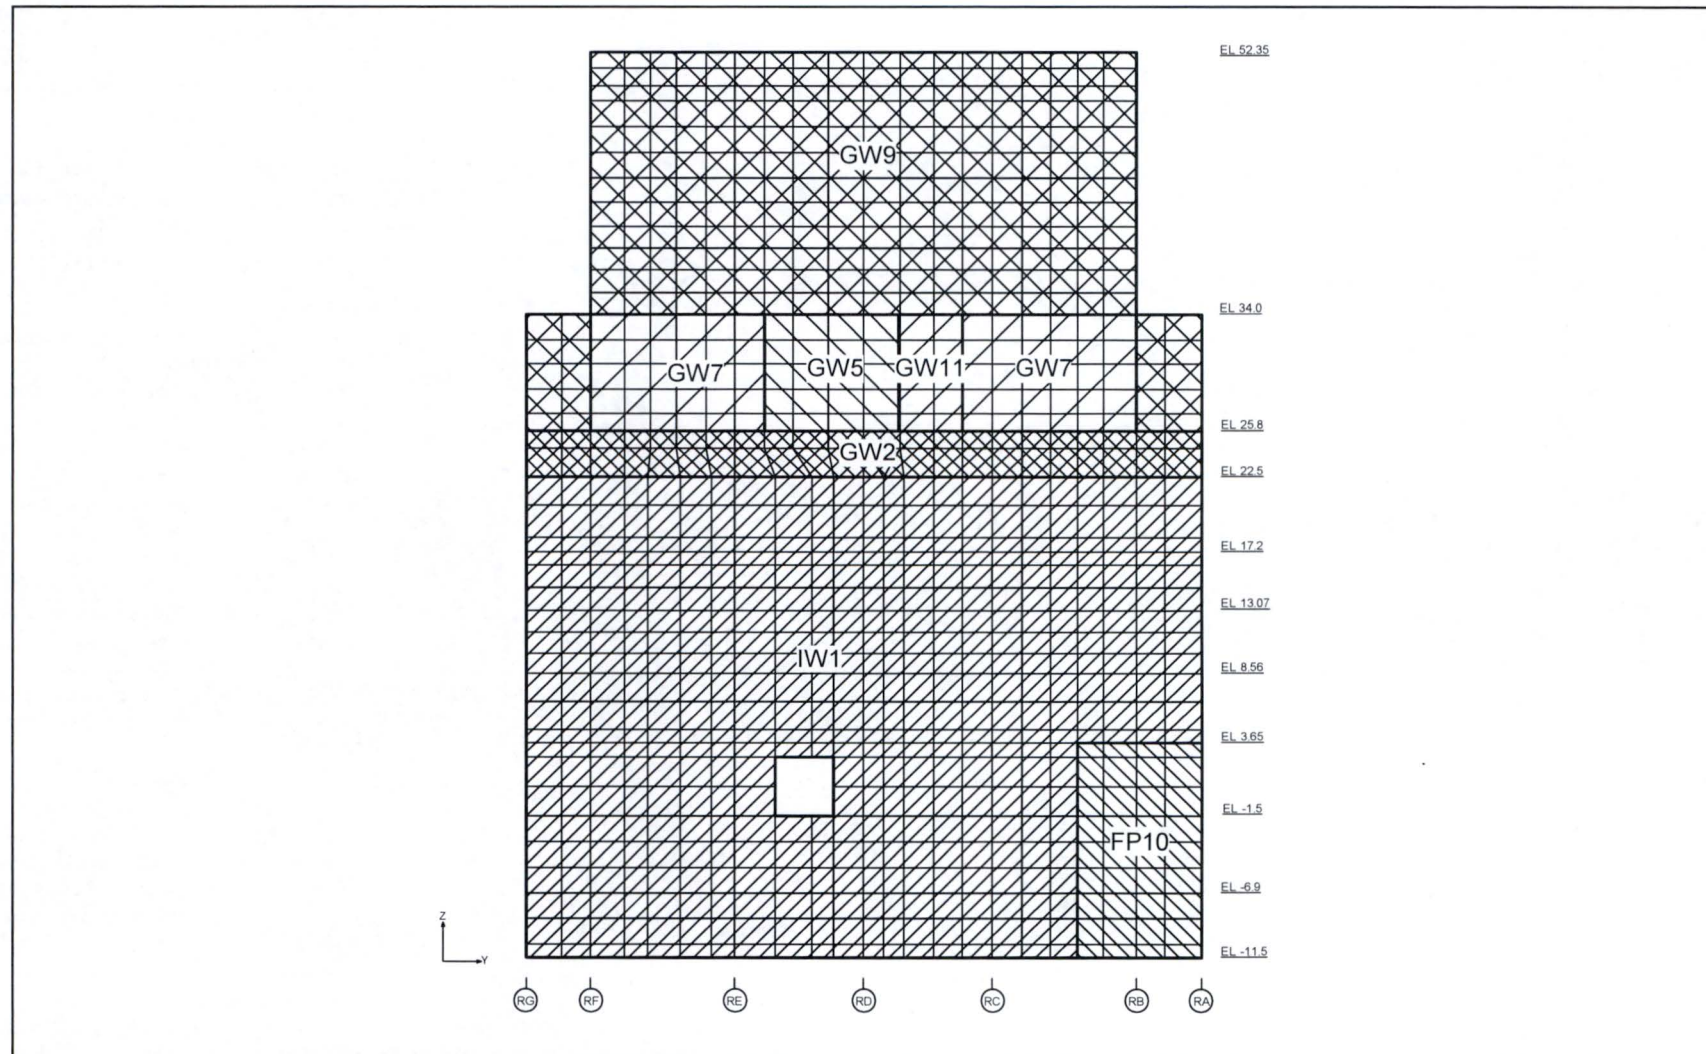


Figure 6.2.3.4-10 Application of Thermal Load on the External Wall (R7/F1)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 378

REV. 2

of 543

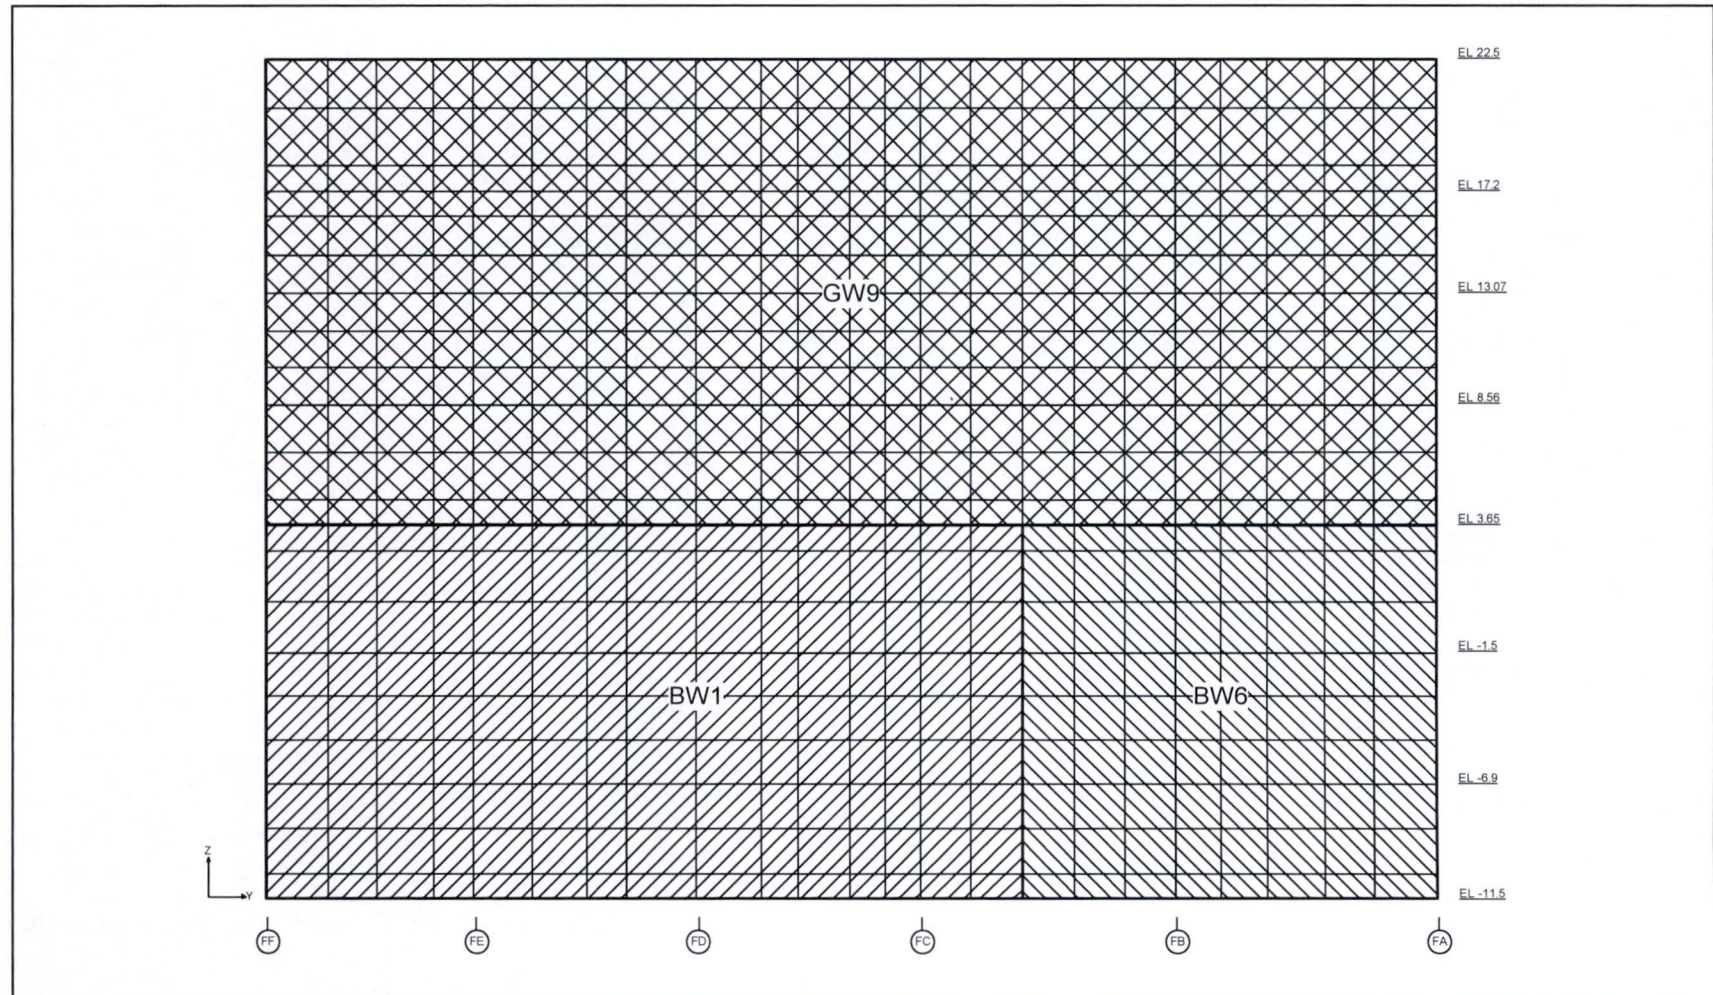


Figure 6.2.3.4-11 Application of Thermal Load on the External Wall (F3)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 379

REV. 2

of 543

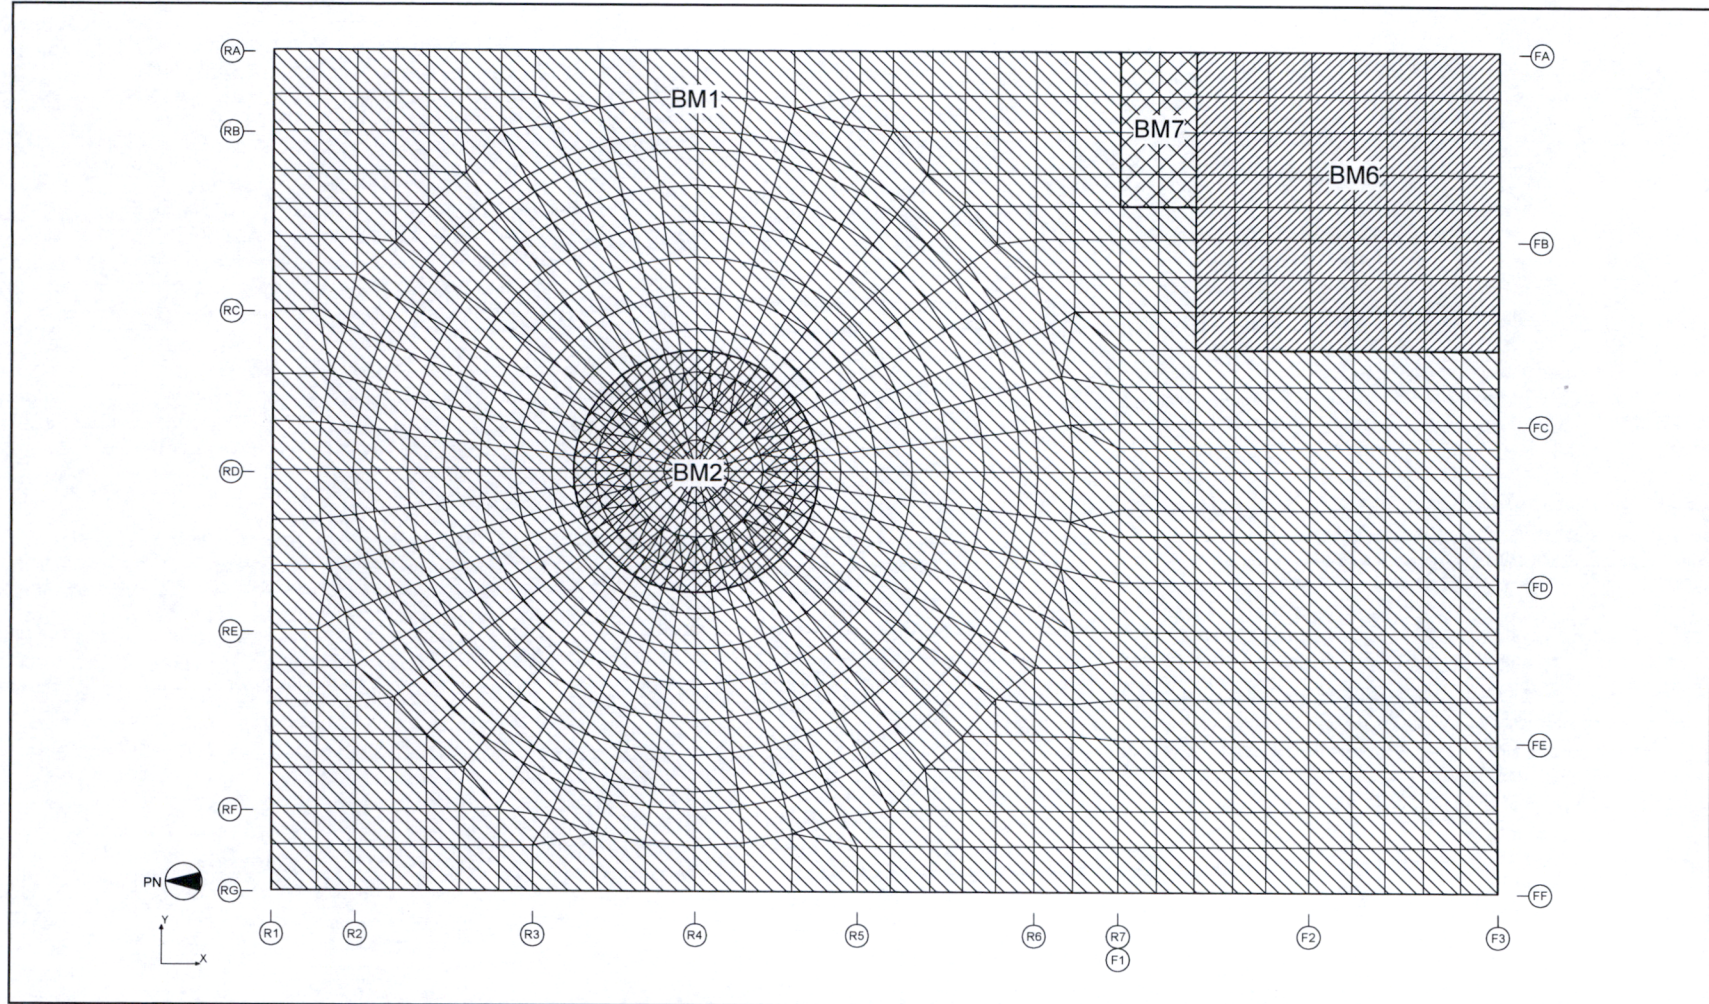


Figure 6.2.3.4-12 Application of Thermal Load on the Basemat



HITACHI

WG3-U71-ERD-S-0004

SH NO. 380

REV. 2

of 543

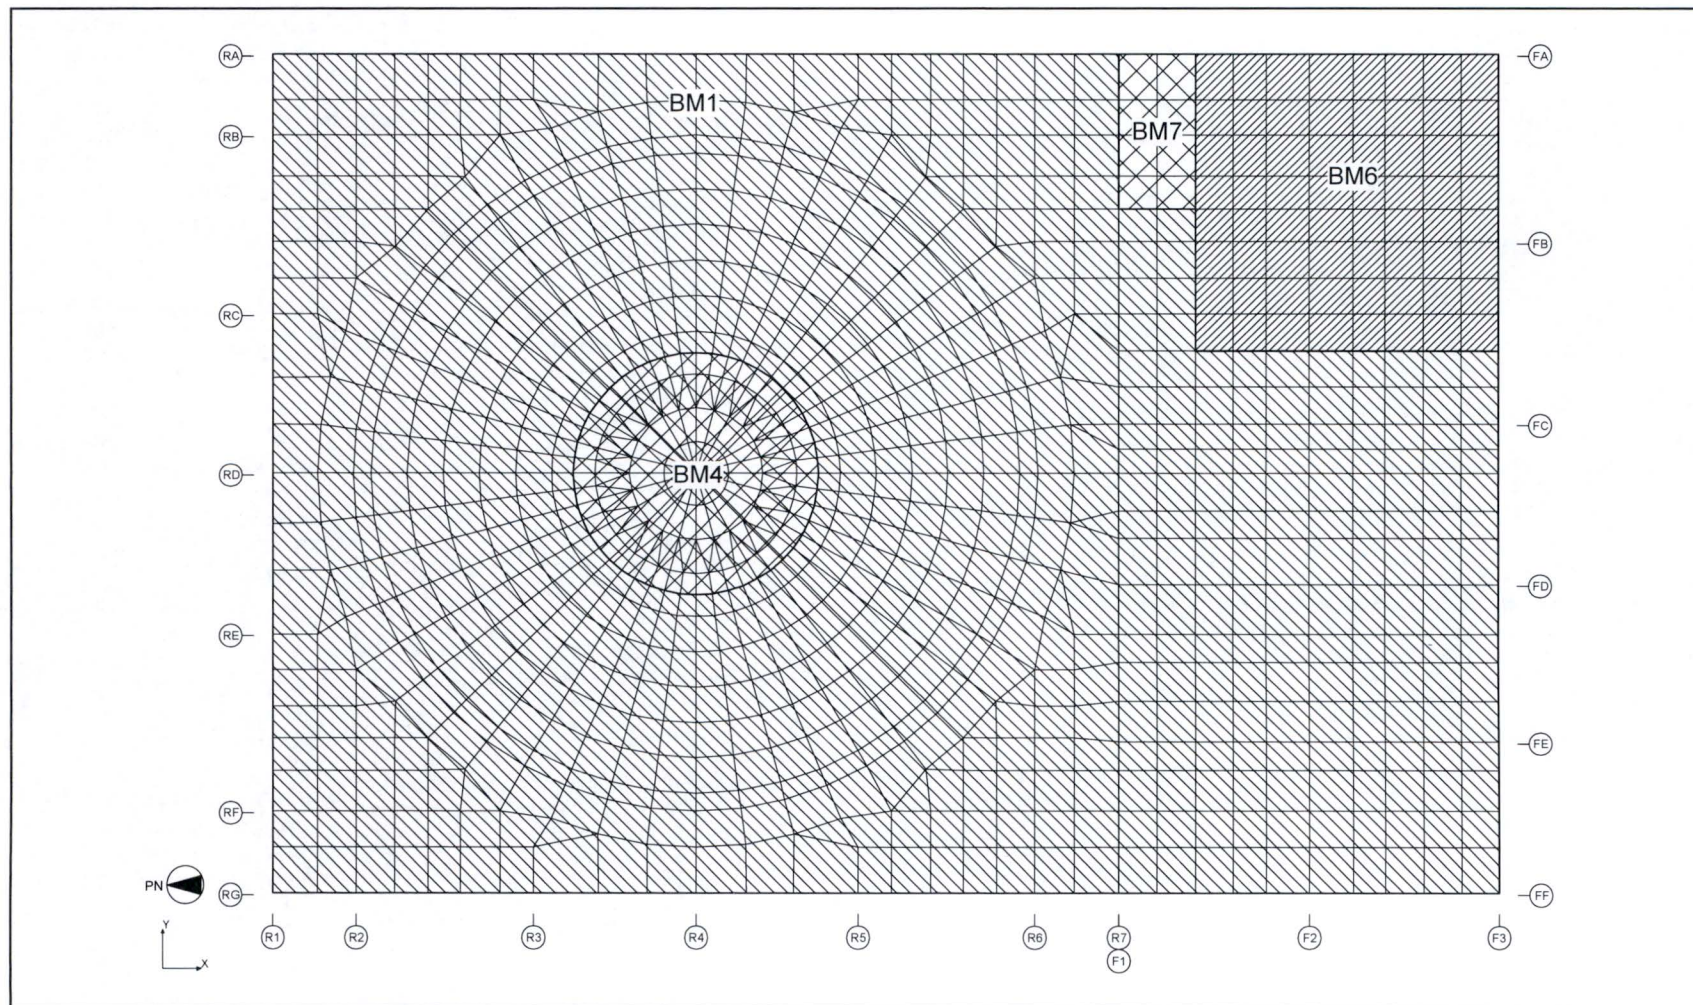


Figure 6.2.3.4-13 Application of Thermal Load on the Basemat (during LOCA Flooding)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 381

REV. 2

of 543

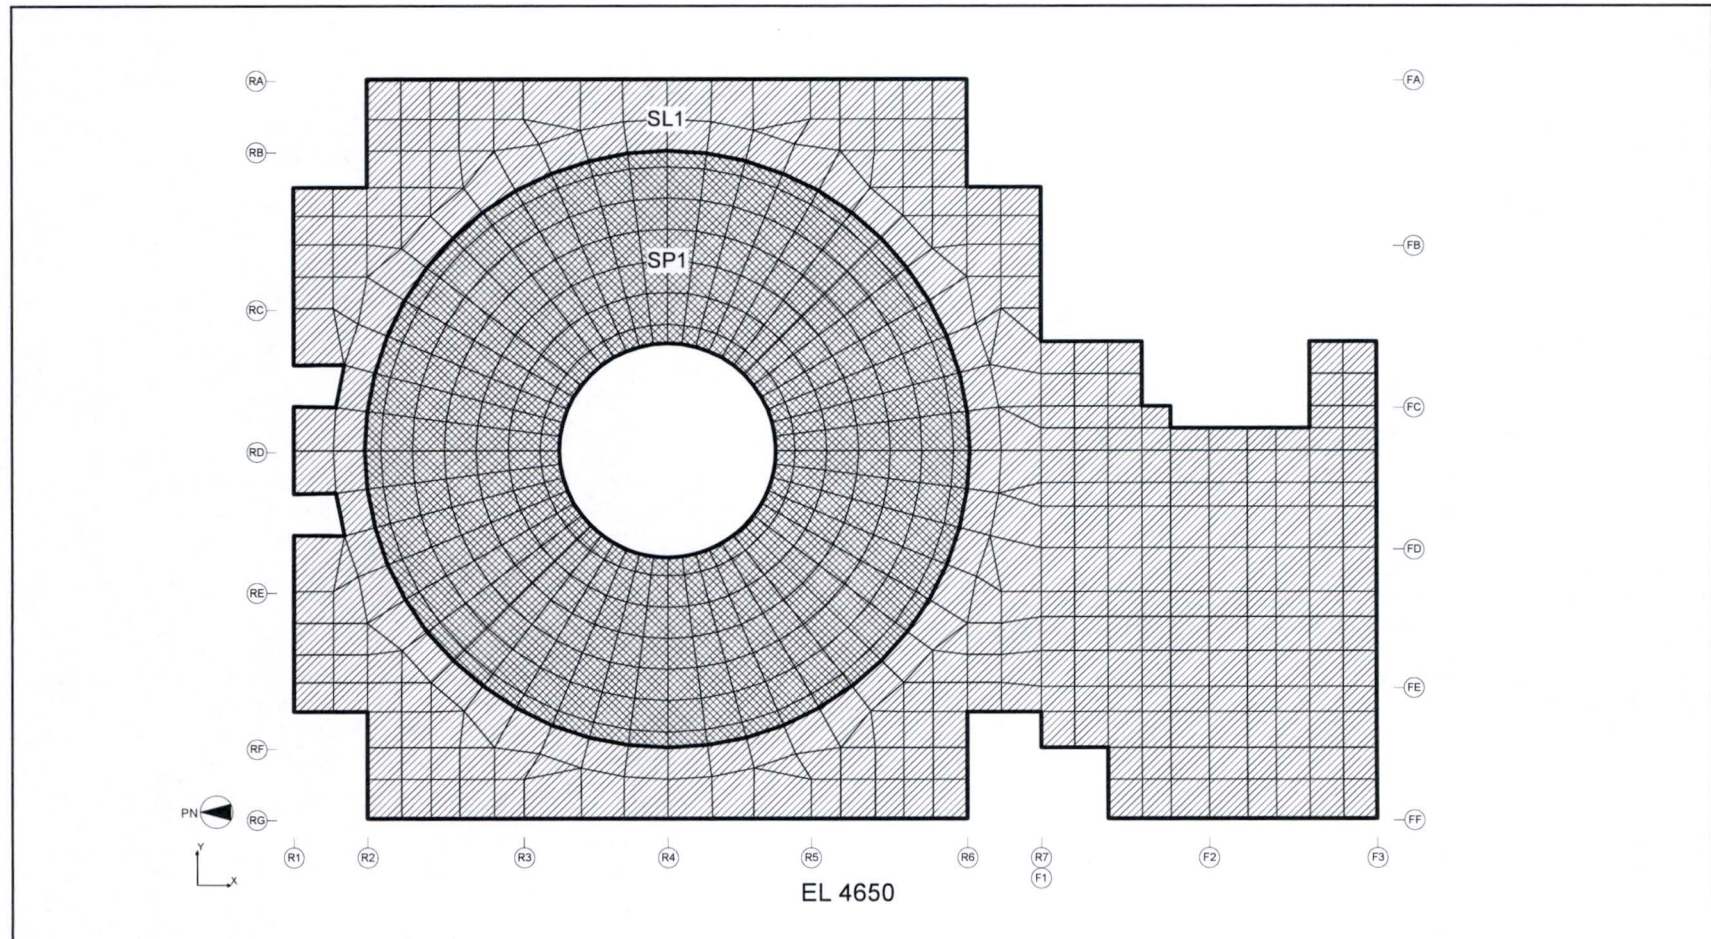


Figure 6.2.3.4-14 Application of Thermal Load on the Slab (EL 4,650)



HITACHI

WG3-U71-ERD-S-0004 SH NO. 382
REV. 2 of 543

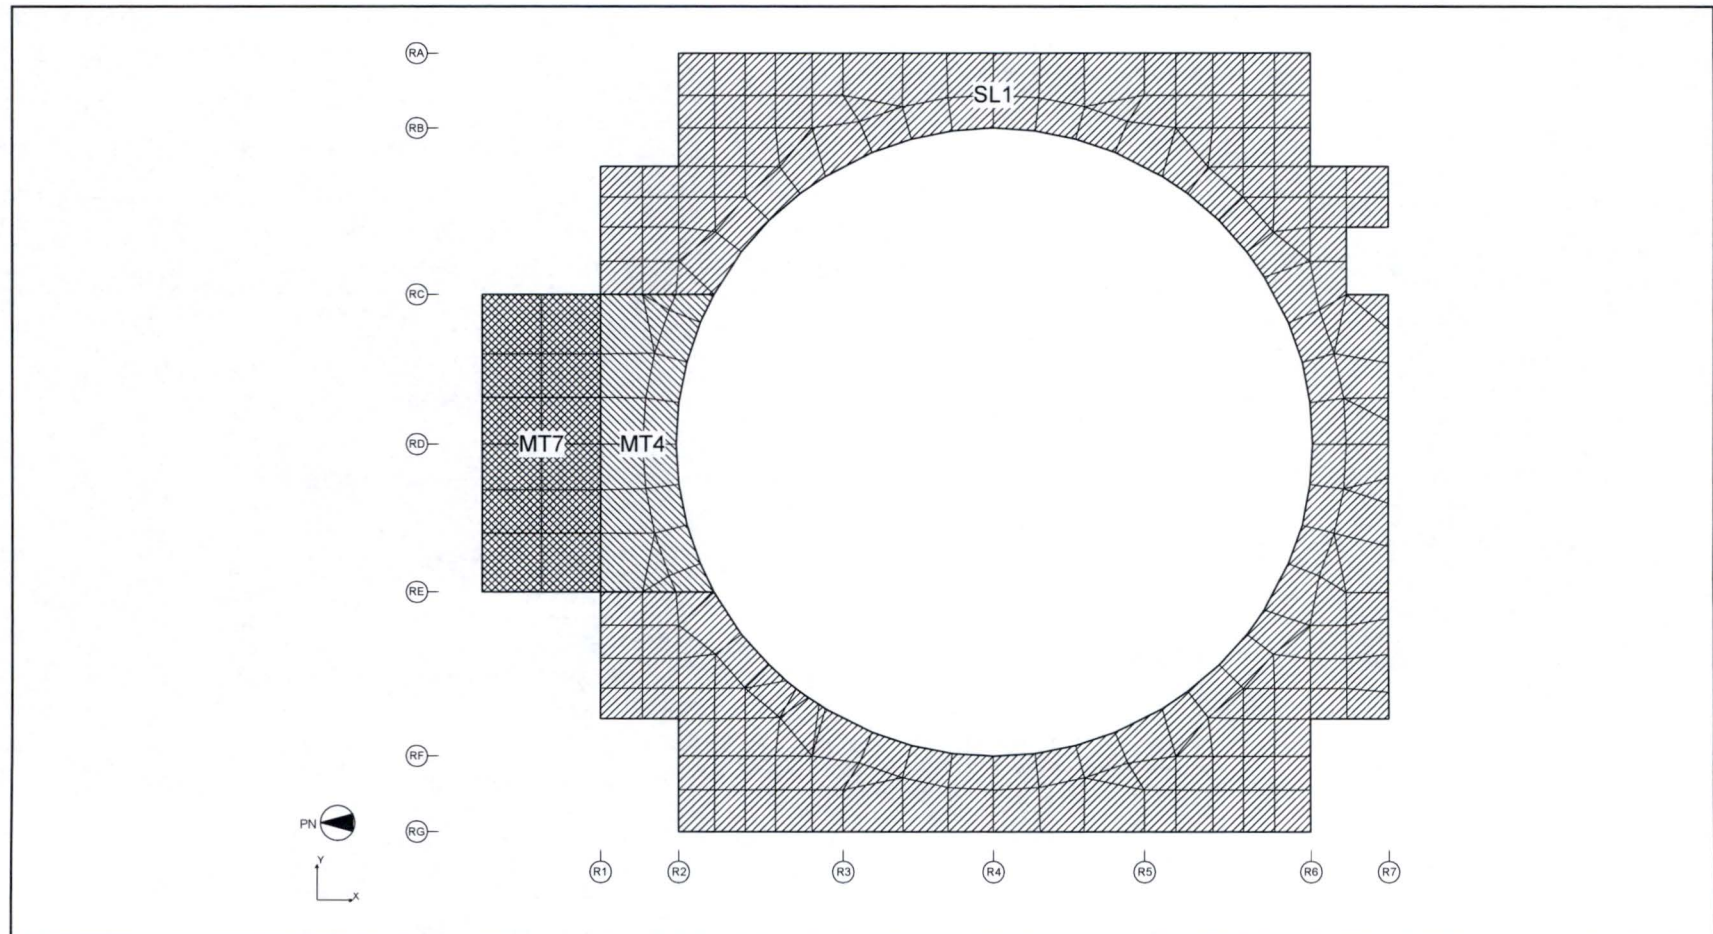


Figure 6.2.3.4-15 Application of Thermal Load on the Slab (EL 17,500)



HITACHI

WG3-U71-ERD-S-0004 SH NO. 383
REV. 2 of 543

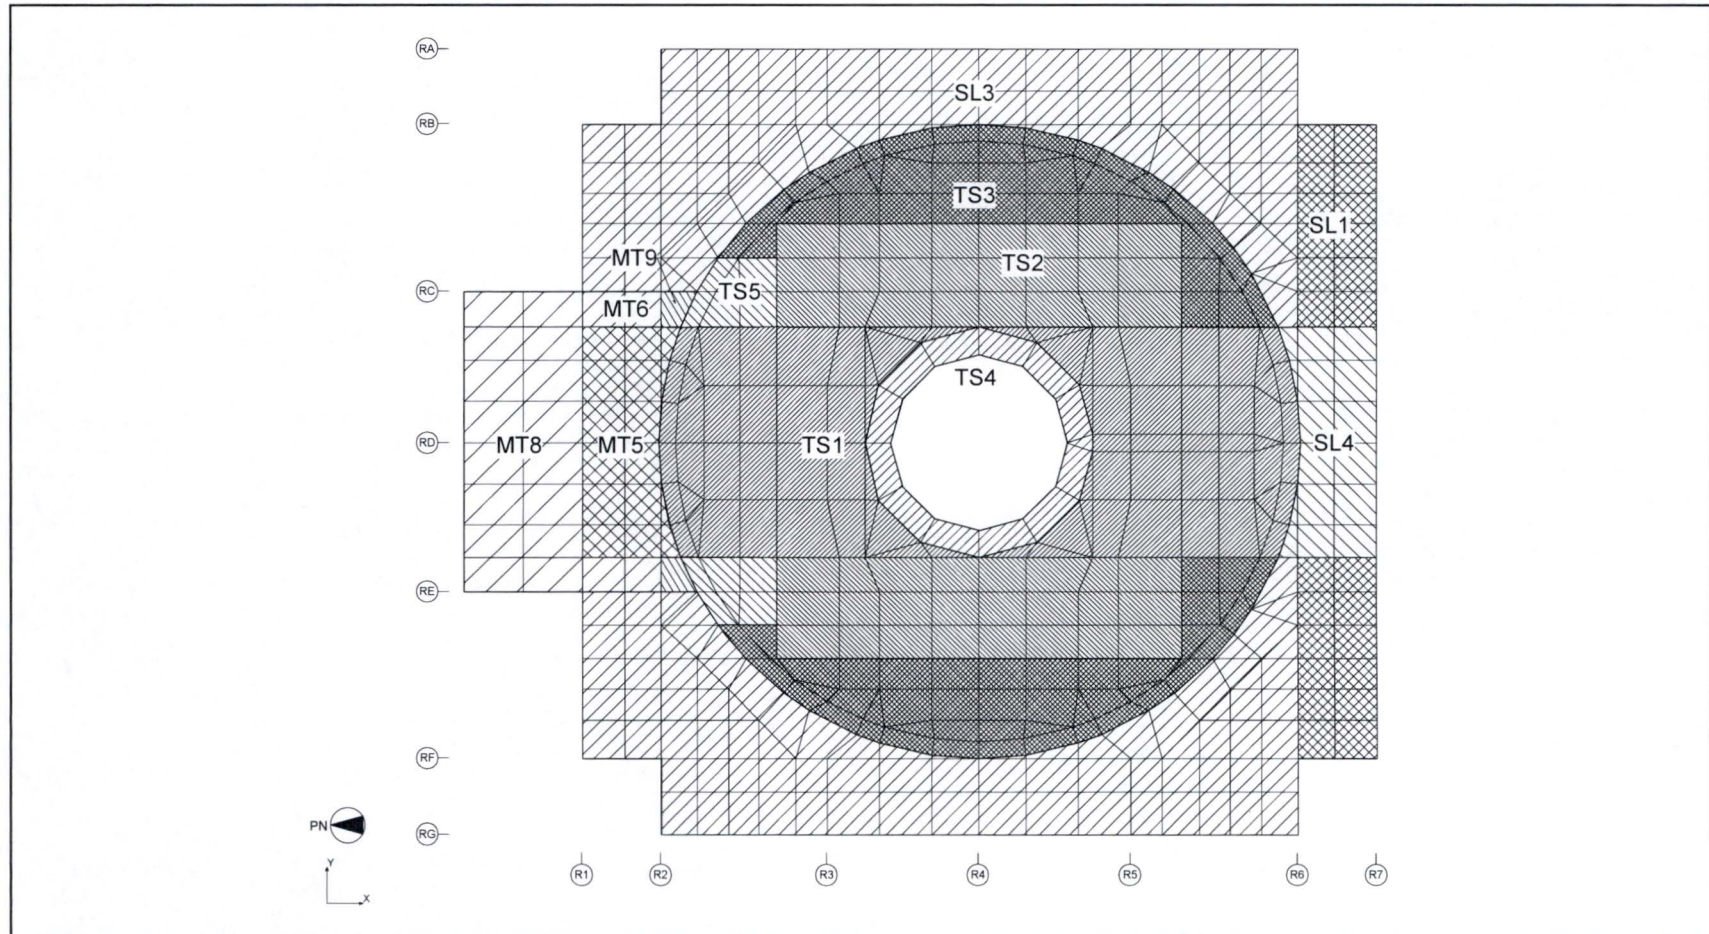


Figure 6.2.3.4-16 Application of Thermal Load on the Slab (EL 27,000)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 384

REV. 2

of 543

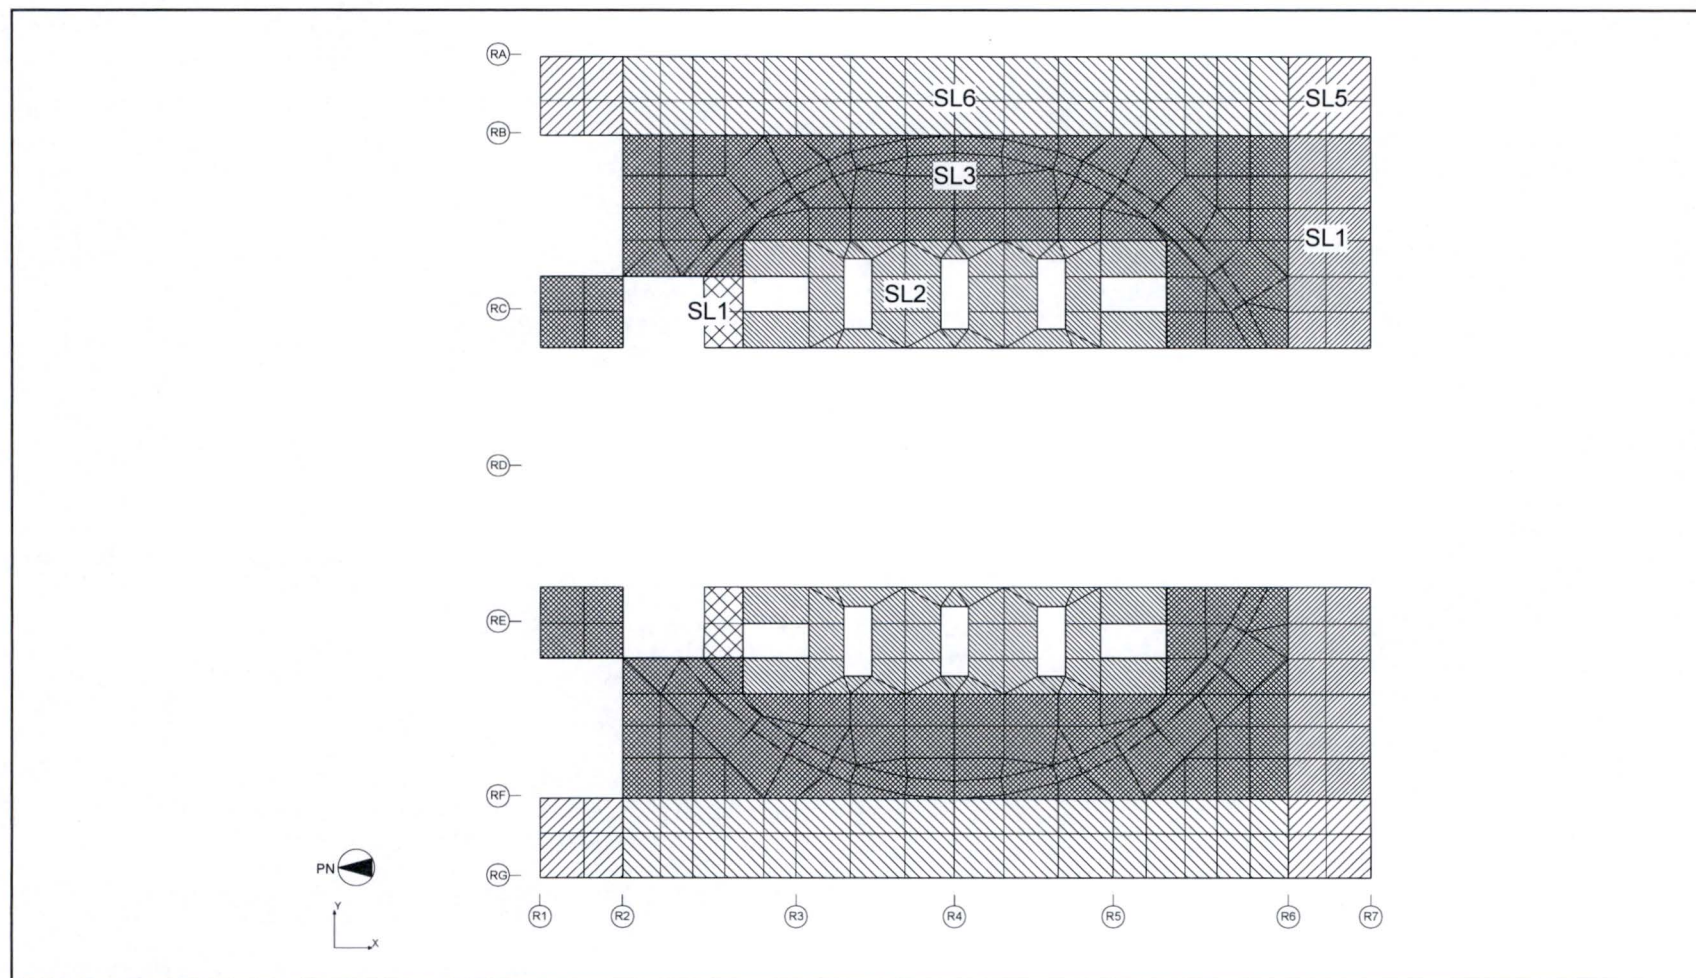


Figure 6.2.3.4-17 Application of Thermal Load on the Slab (EL 34,000)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 385

REV. 2

of 543

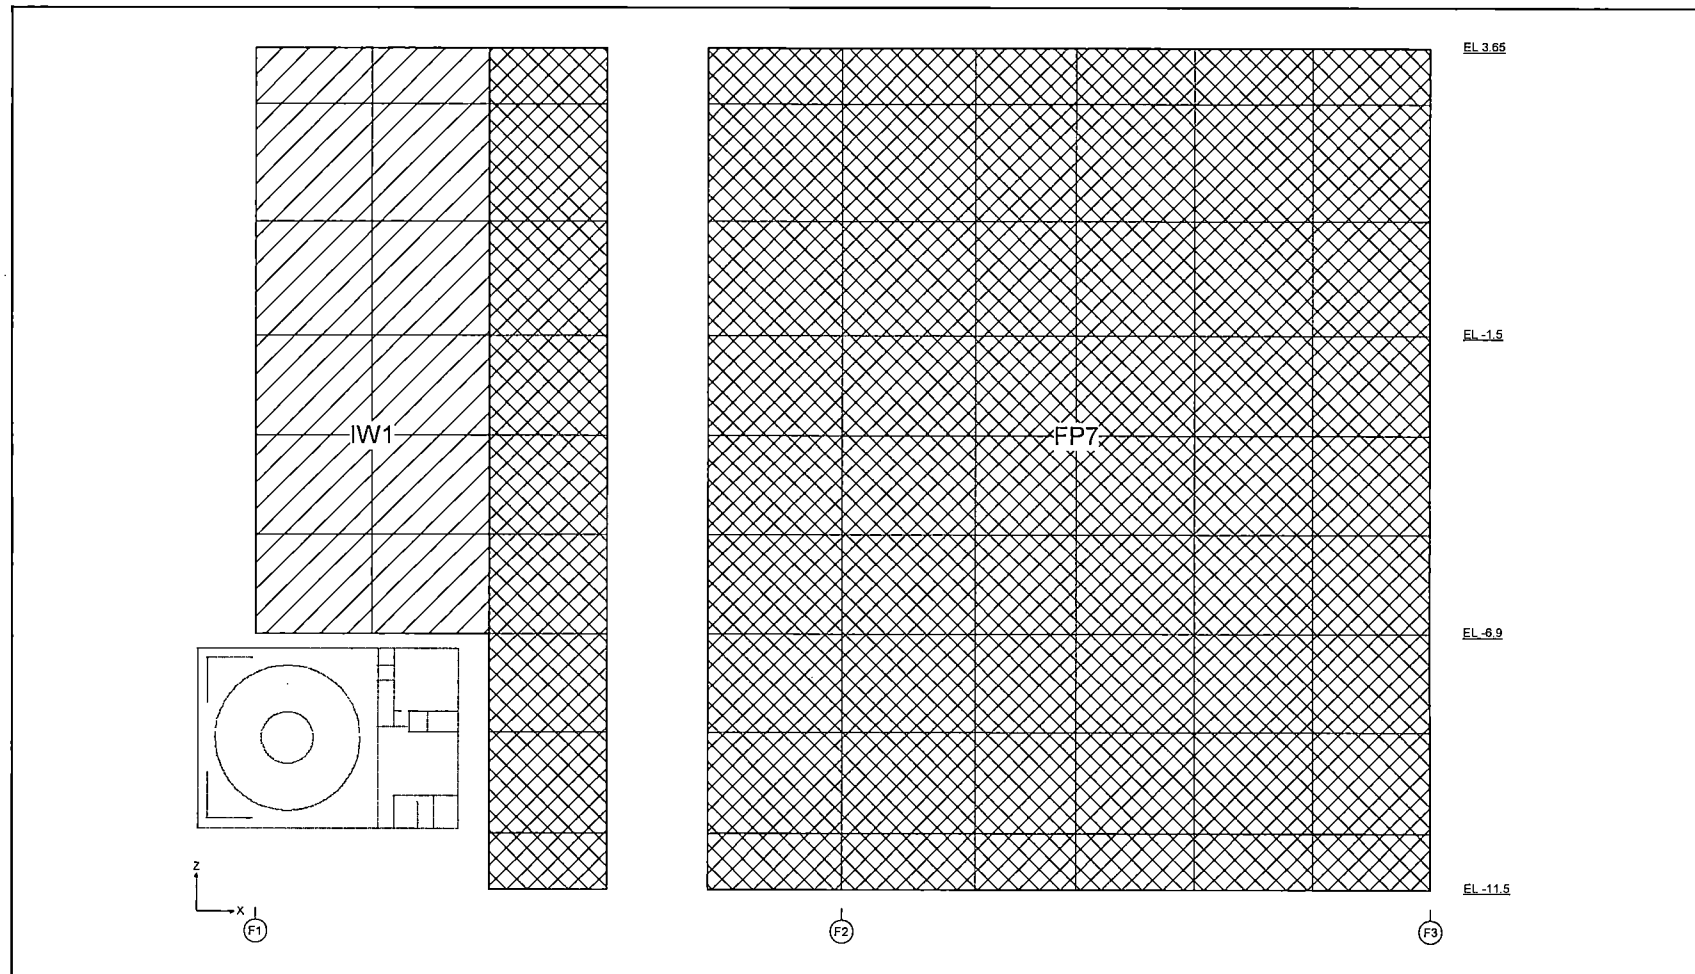


Figure 6.2.3.4-18 Application of Thermal Load on the Spent Fuel Pool Wall-1



HITACHI

WG3-U71-ERD-S-0004 SH NO. 387
REV. 2 of 543

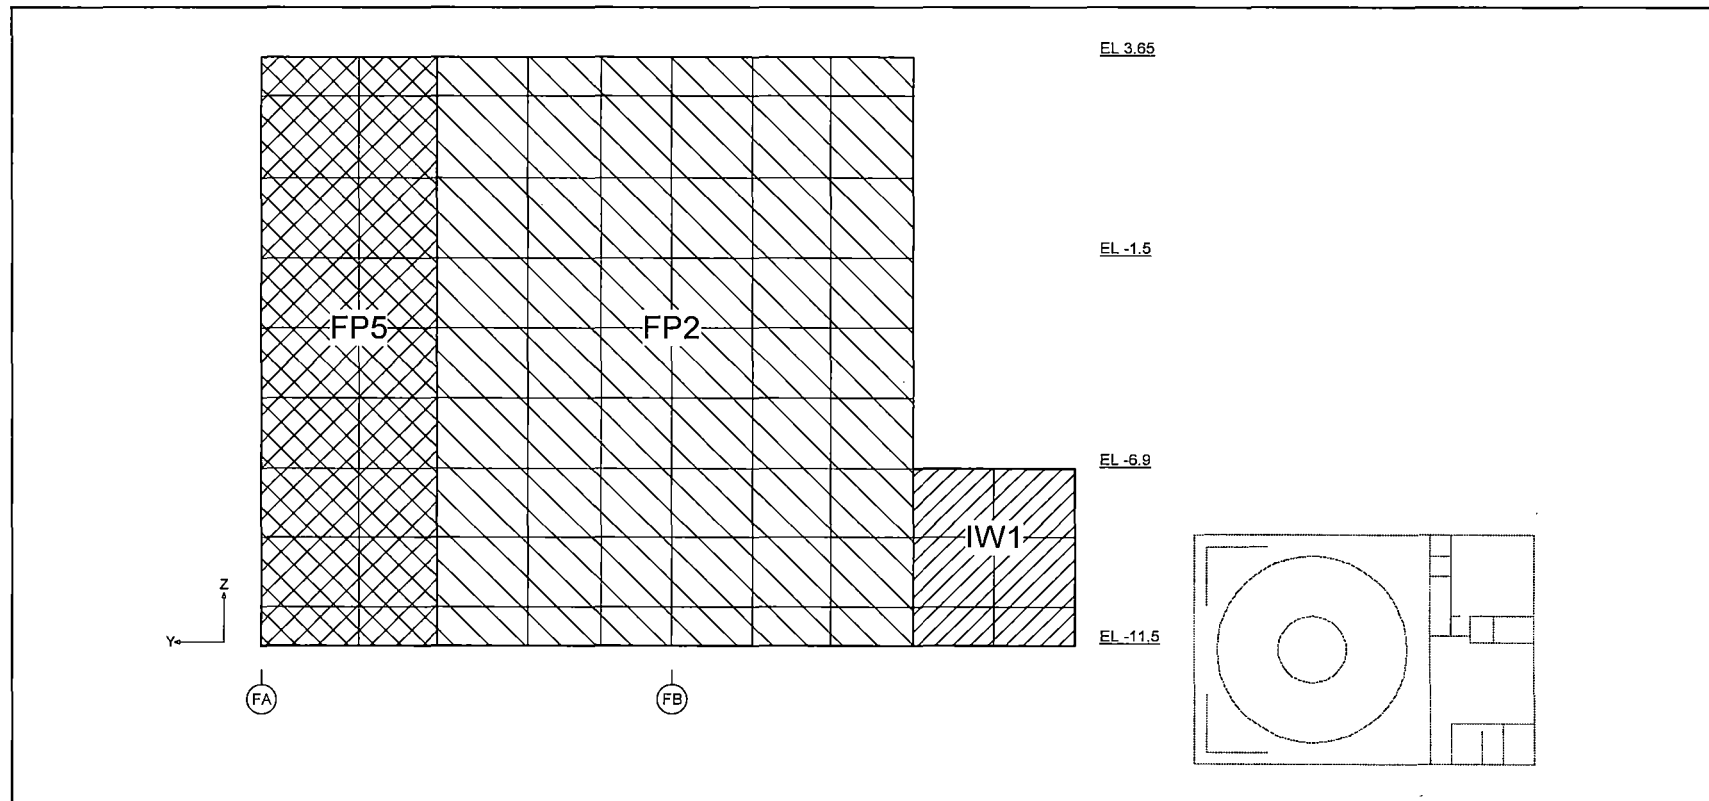


Figure 6.2.3.4-20 Application of Thermal Load on the Spent Fuel Pool Wall-3



HITACHI

WG3-U71-ERD-S-0004

SH NO. 388

REV. 2

of 543

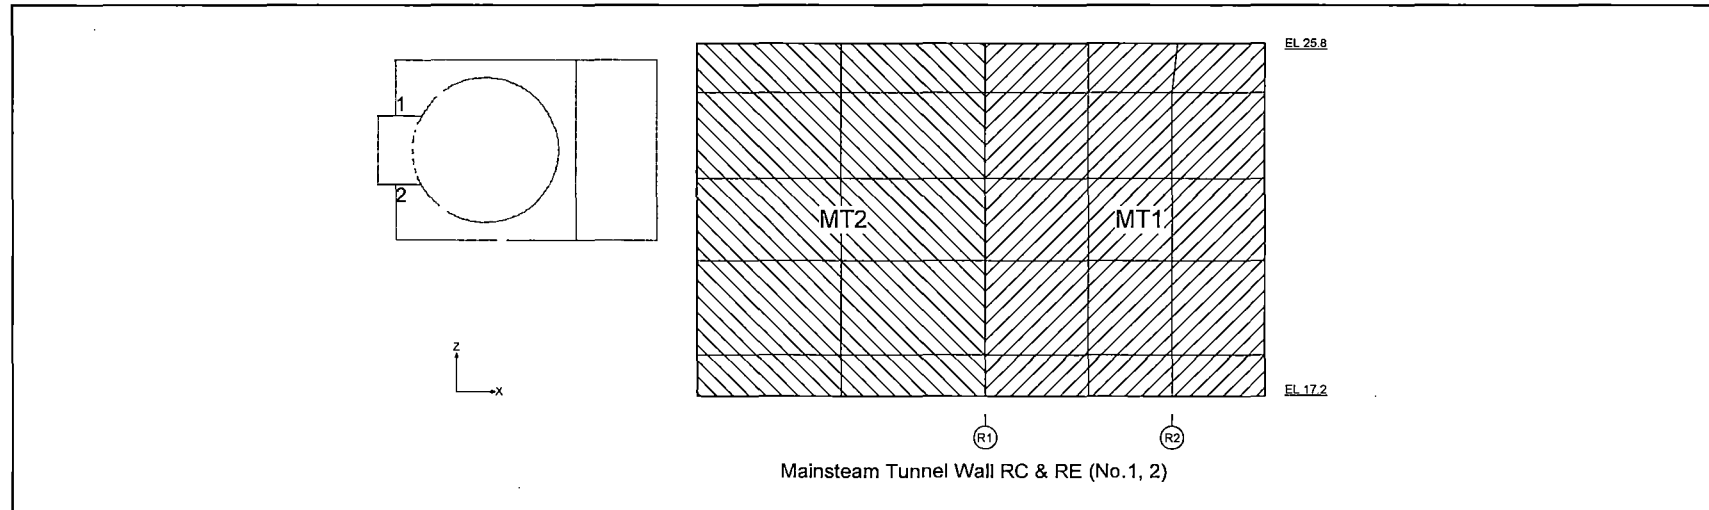


Figure 6.2.3.4-21 Application of Thermal Load on the MS Tunnel Wall



HITACHI

WG3-U71-ERD-S-0004

SH NO. 389

REV. 2

of 543

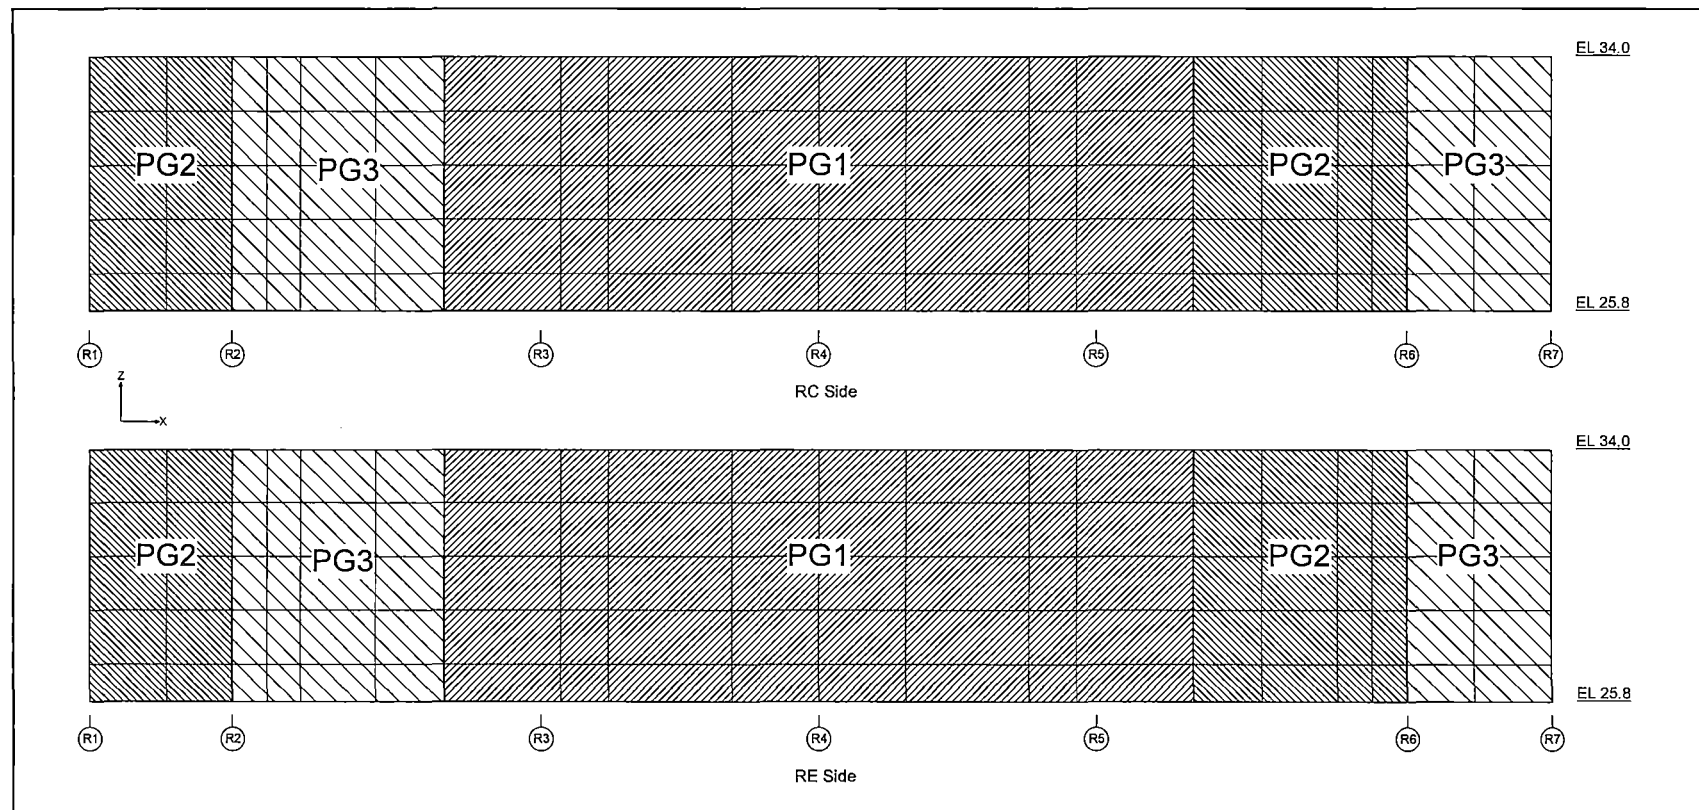


Figure 6.2.3.4-22 Application of Thermal Load on the Pool Girder




HITACHI

WG3-U71-ERD-S-0004

SH NO. 390

REV. 2

of 543

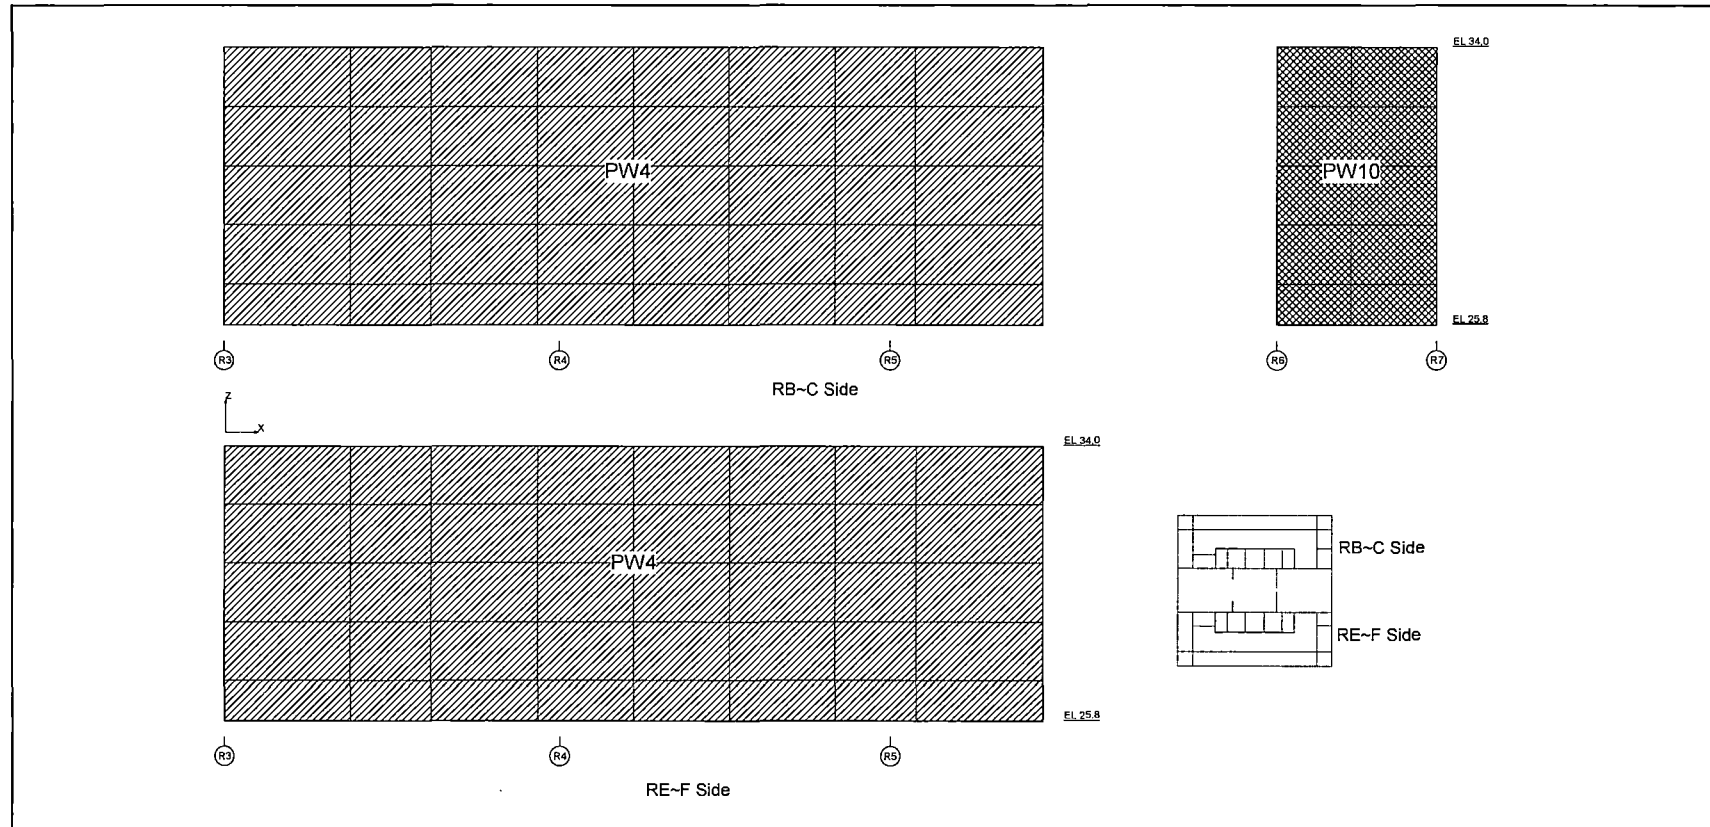



HITACHI

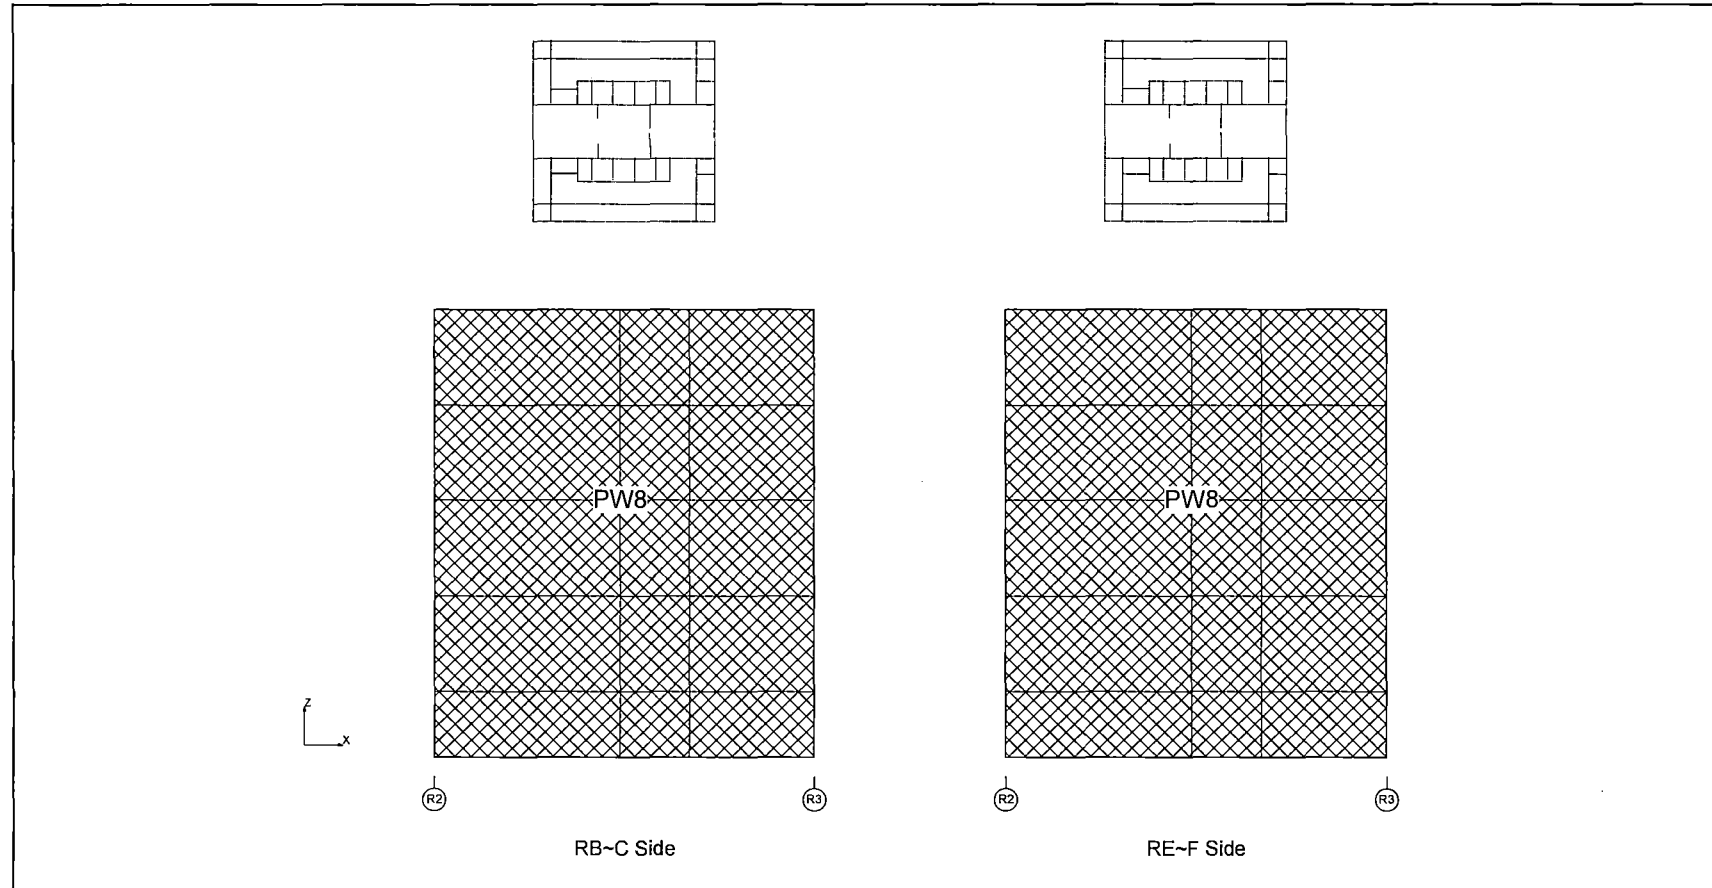


Figure 6.2.3.4-24 Application of Thermal Load on the IC/PCCS Pool Wall-1(2)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 392

REV. 2

of 543

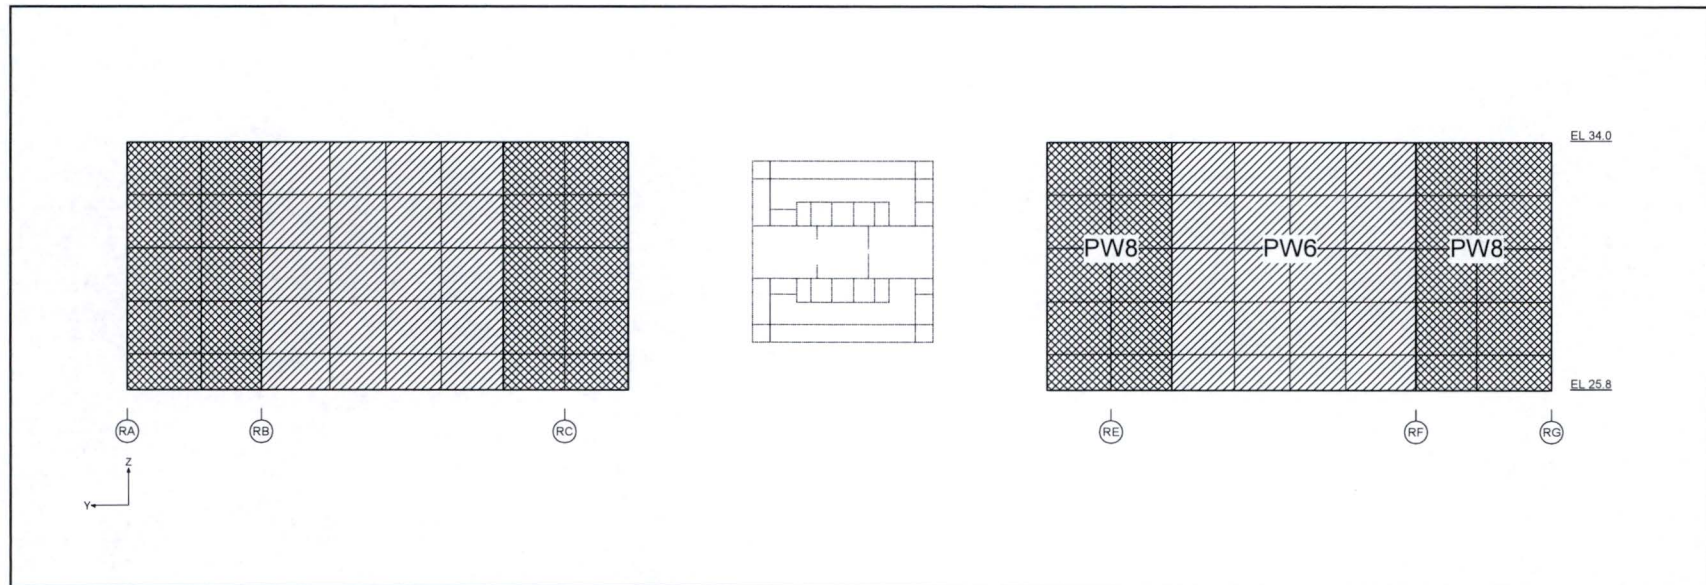


Figure 6.2.3.4-25 Application of Thermal Load on the IC/PCCS Pool Wall-5 (R2)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 393

REV. 2

of 543

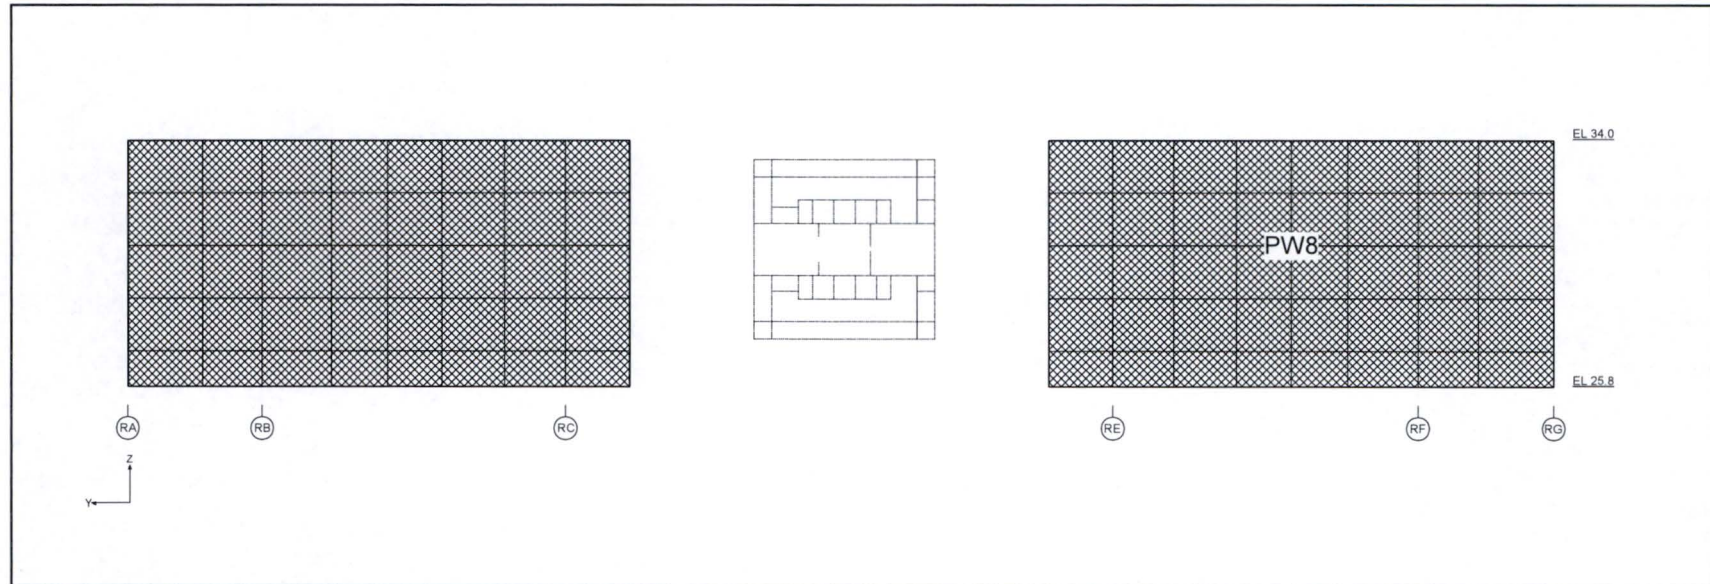


Figure 6.2.3.4-26 Application of Thermal Load on the IC/PCCS Pool Wall-6 (R6)

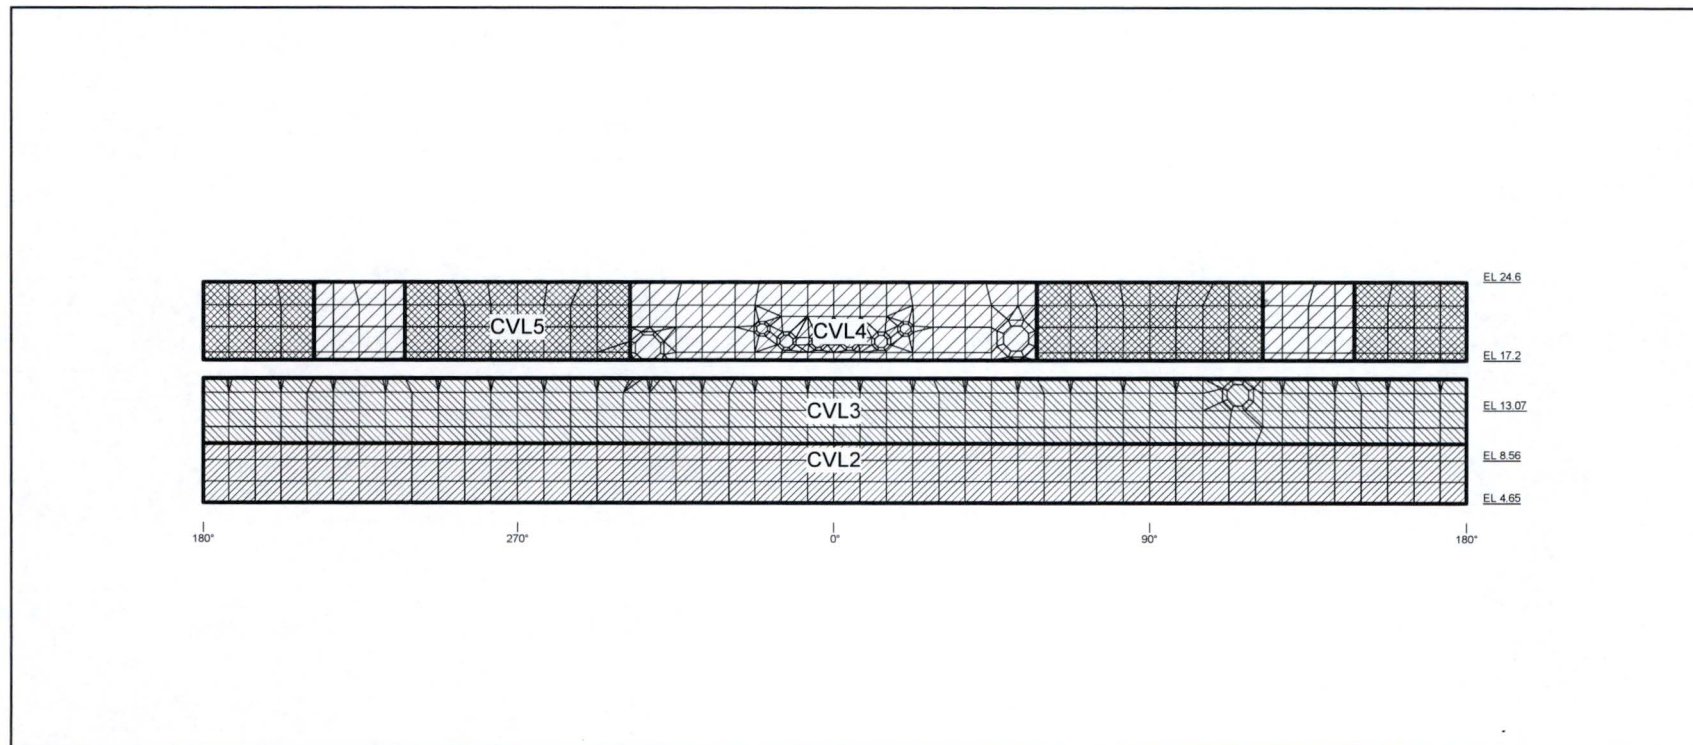


Figure 6.2.3.4-27 Application of Thermal Load on the RCCV Liner (Normal Operation)



HITACHI

WG3-U71-ERD-S-0004 SH NO. 396
REV. 2 of 543

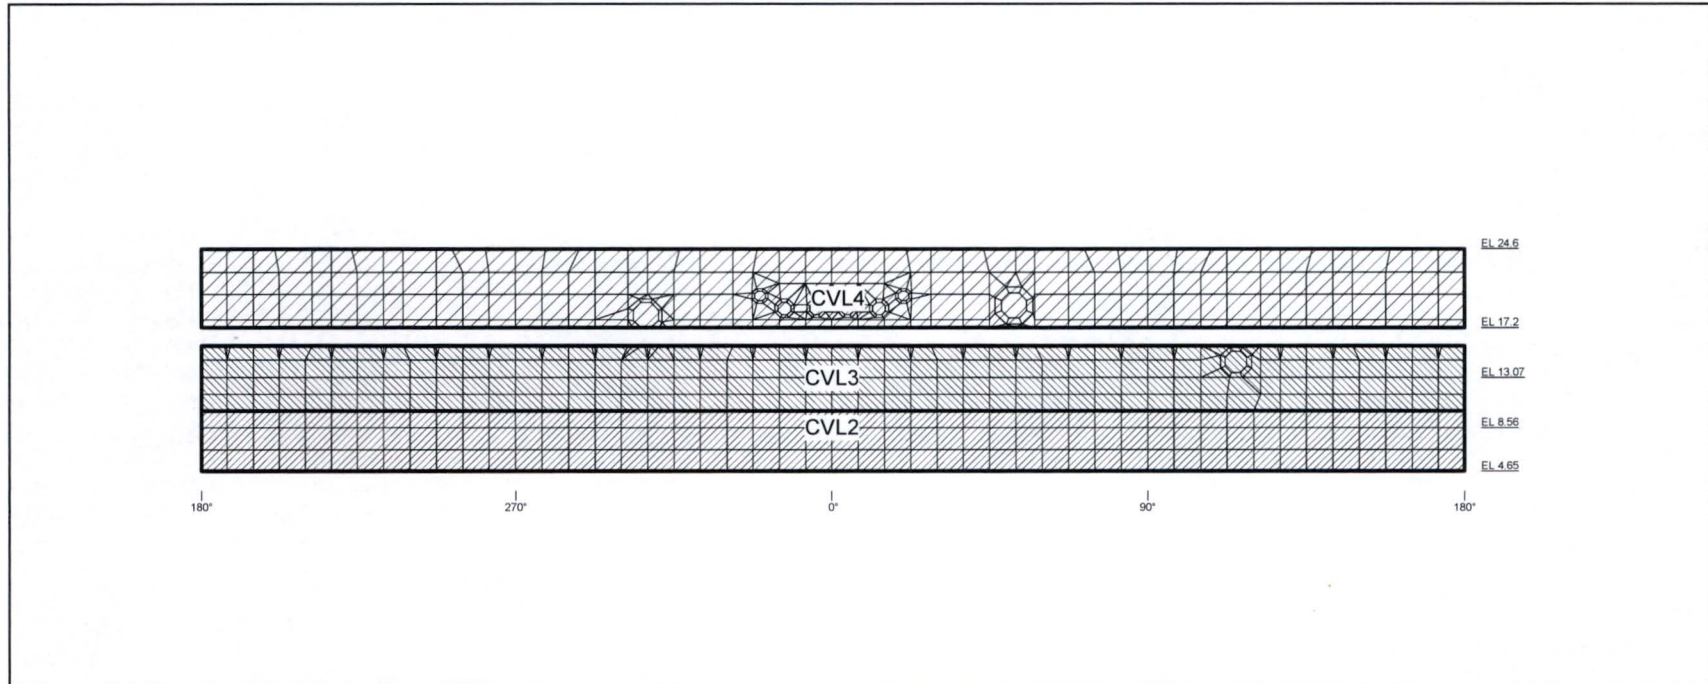


Figure 6.2.3.4-29 Application of Thermal Load on the RCCV Liner (Condition 2)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 397

REV. 2

of 543

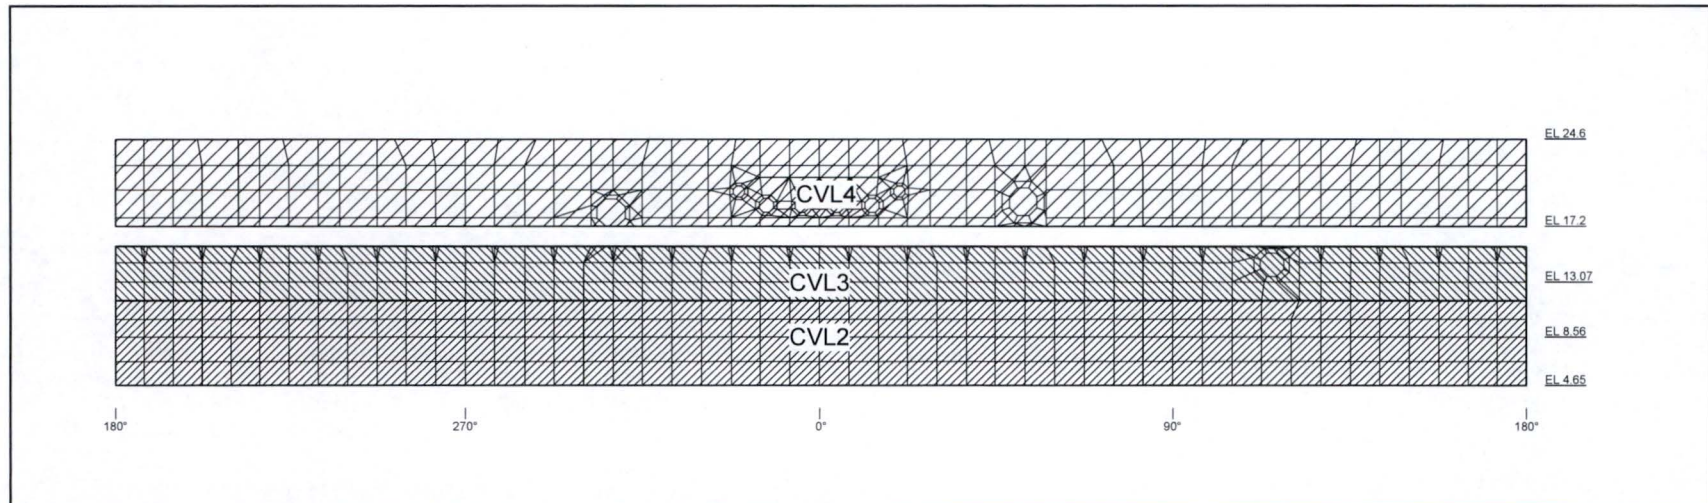


Figure 6.2.3.4-30 Application of Thermal Load on the RCCV Liner (Condition 3)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 398

REV. 2

of 543

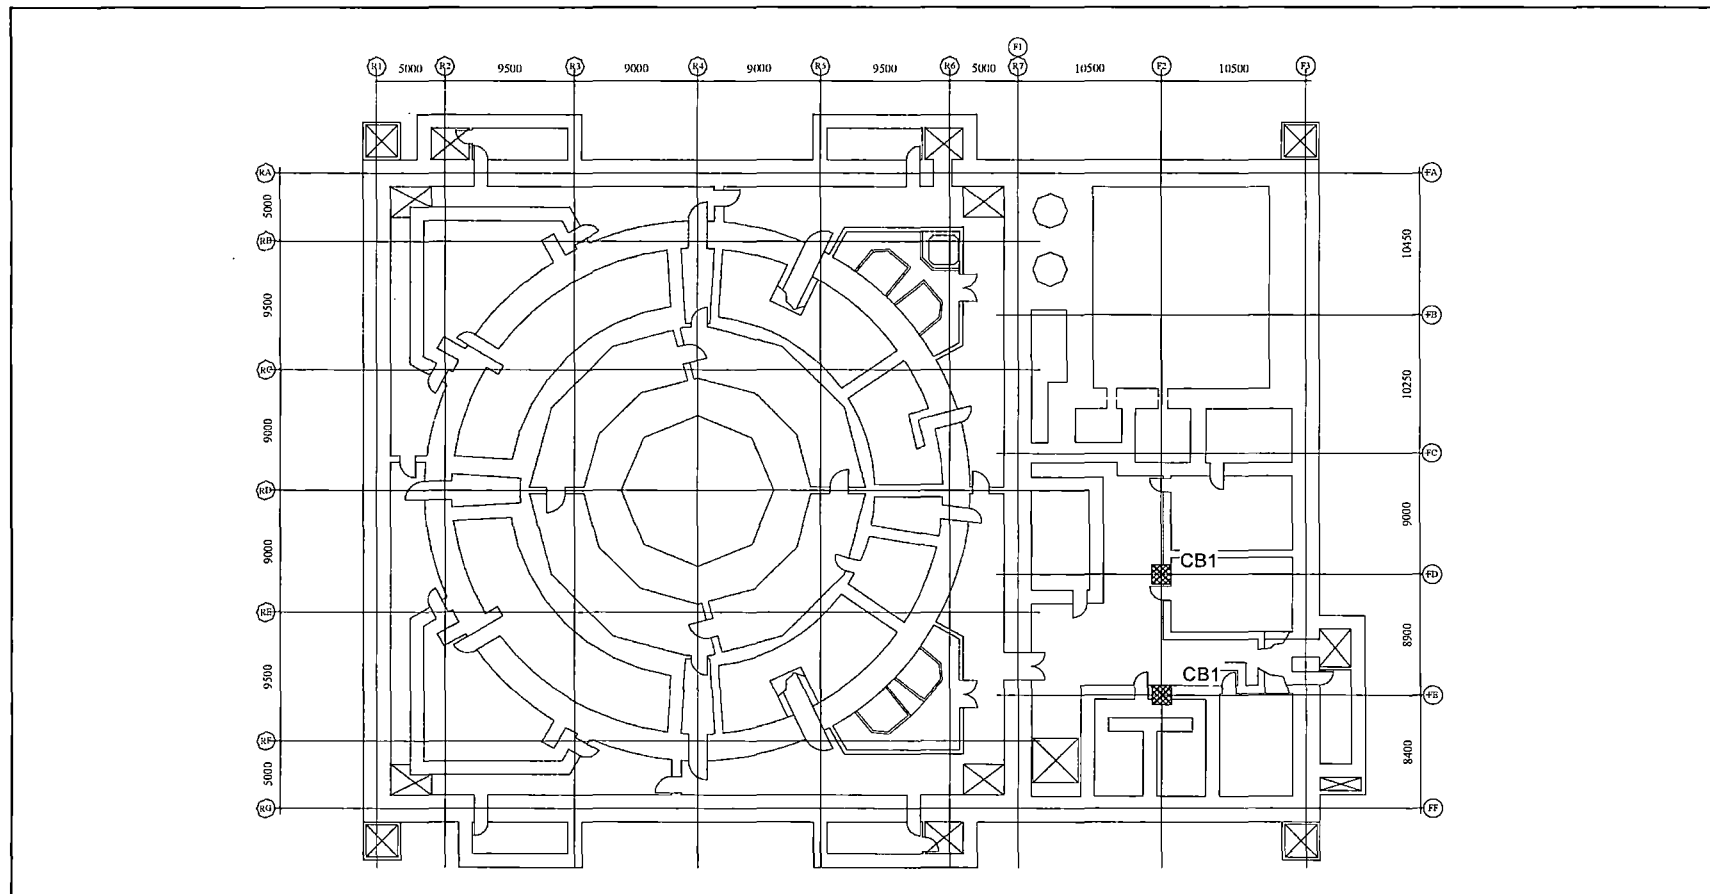


Figure 6.2.3.4-31 Application of Thermal Load on the Reinforced Concrete Girder and Column (EL -11.500)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 399

REV. 2

of 543

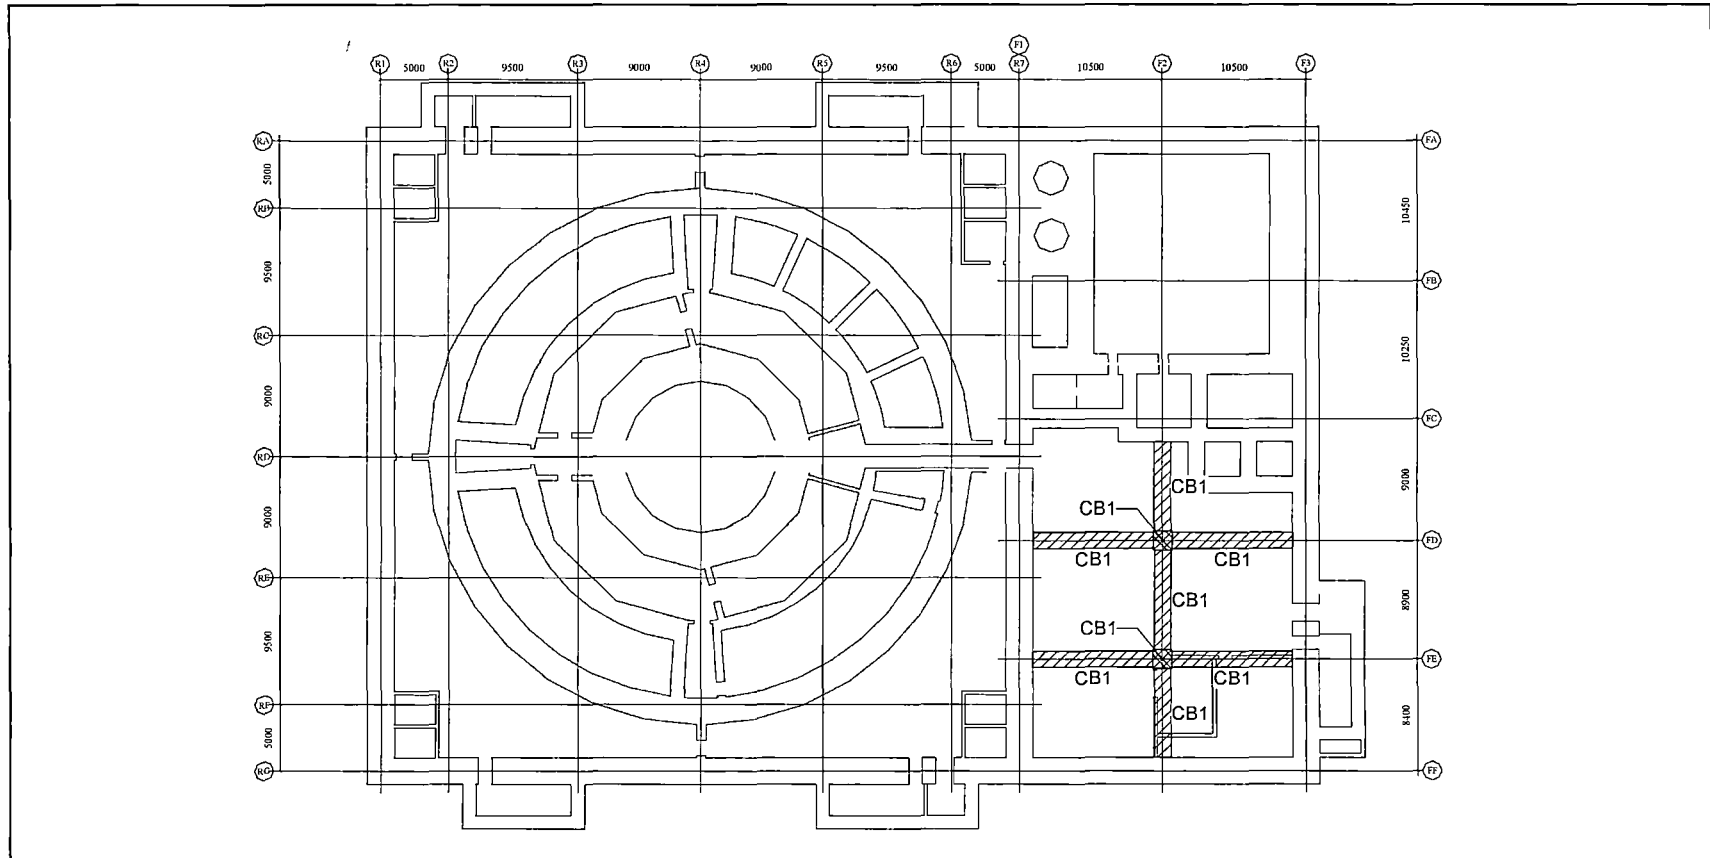


Figure 6.2.3.4-32 Application of Thermal Load on the Reinforced Concrete Girder and Column (EL -6.400)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 400

REV. 2

of 543

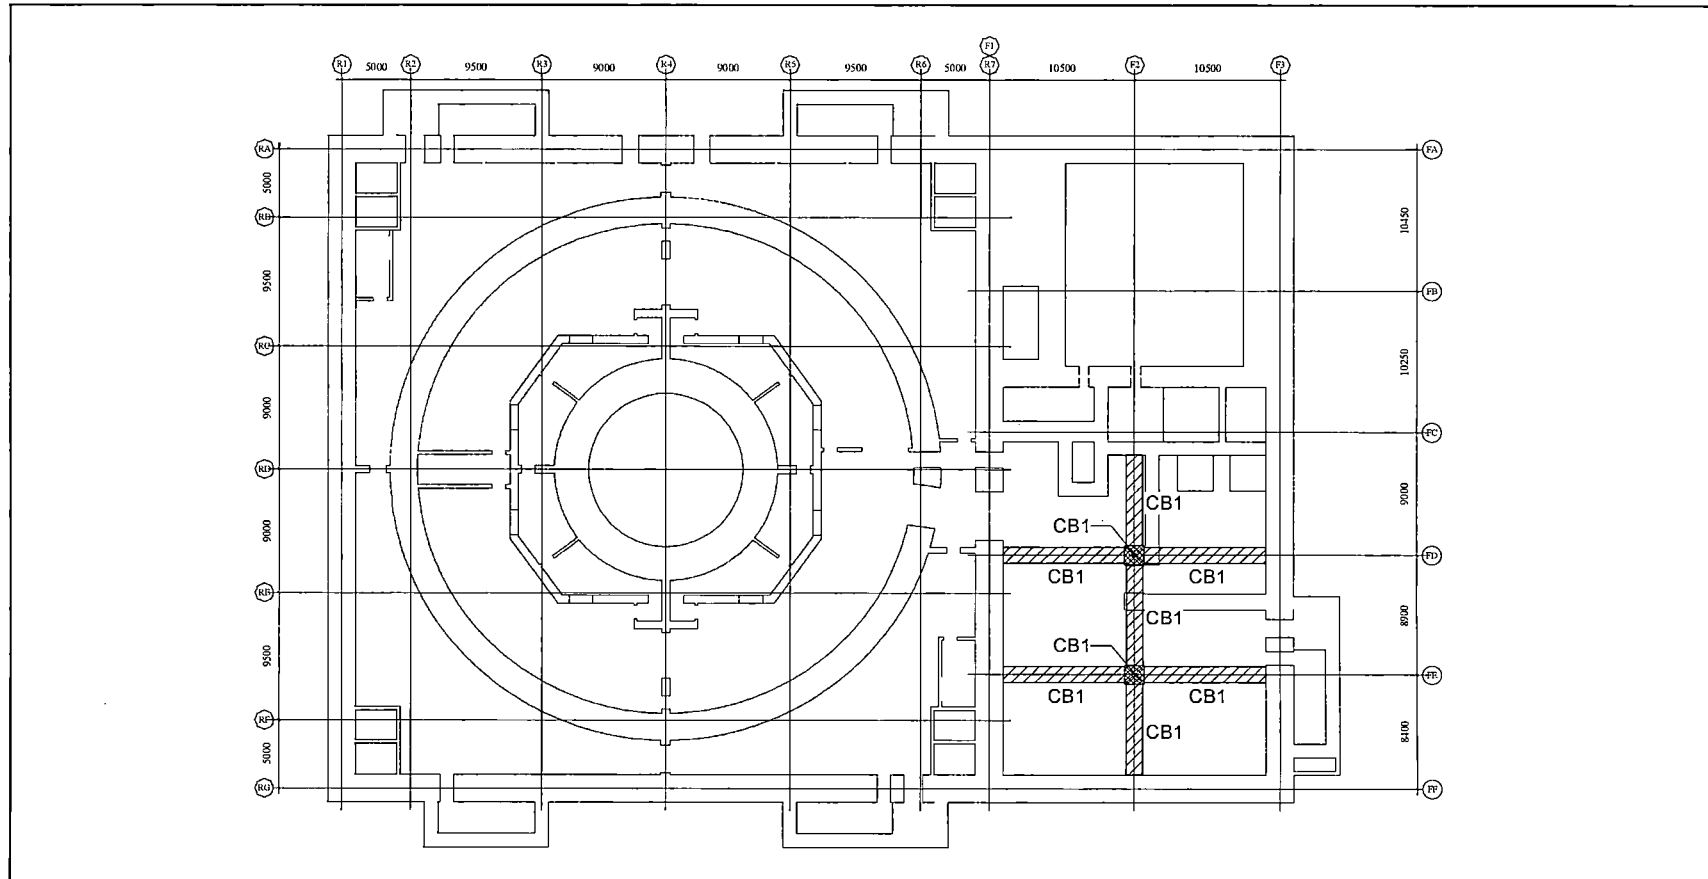


Figure 6.2.3.4-33 Application of Thermal Load on the Reinforced Concrete Girder and Column (EL -1.000)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 401

REV. 2

of 543

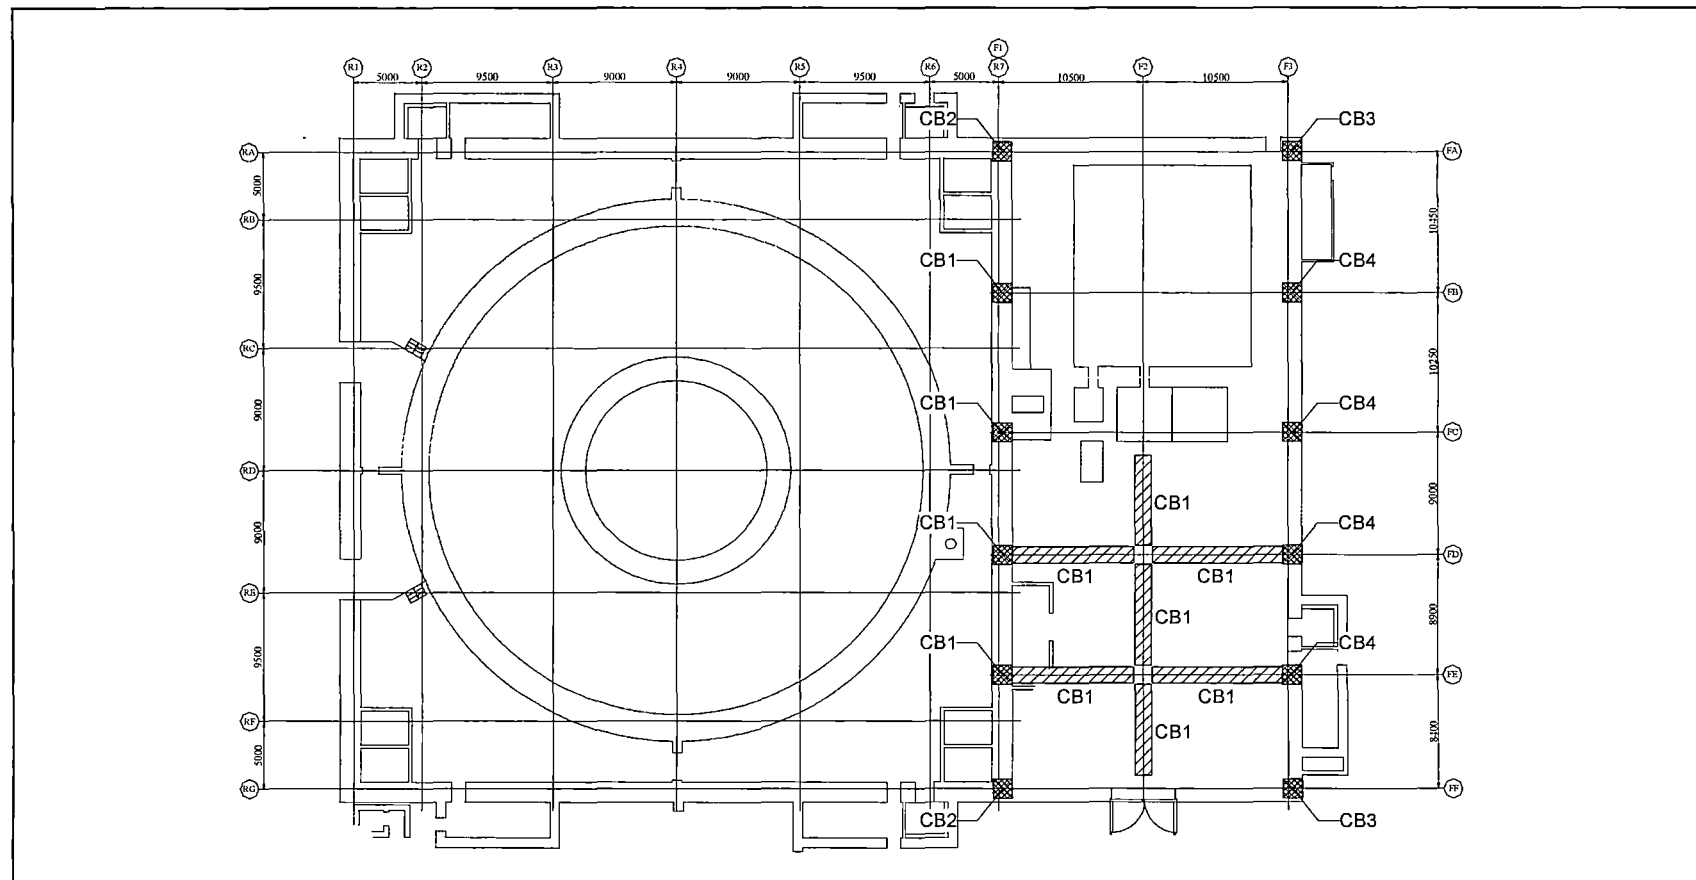


Figure 6.2.3.4-34 Application of Thermal Load on the Reinforced Concrete Girder and Column (EL 4,650)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 402

REV. 2

of 543

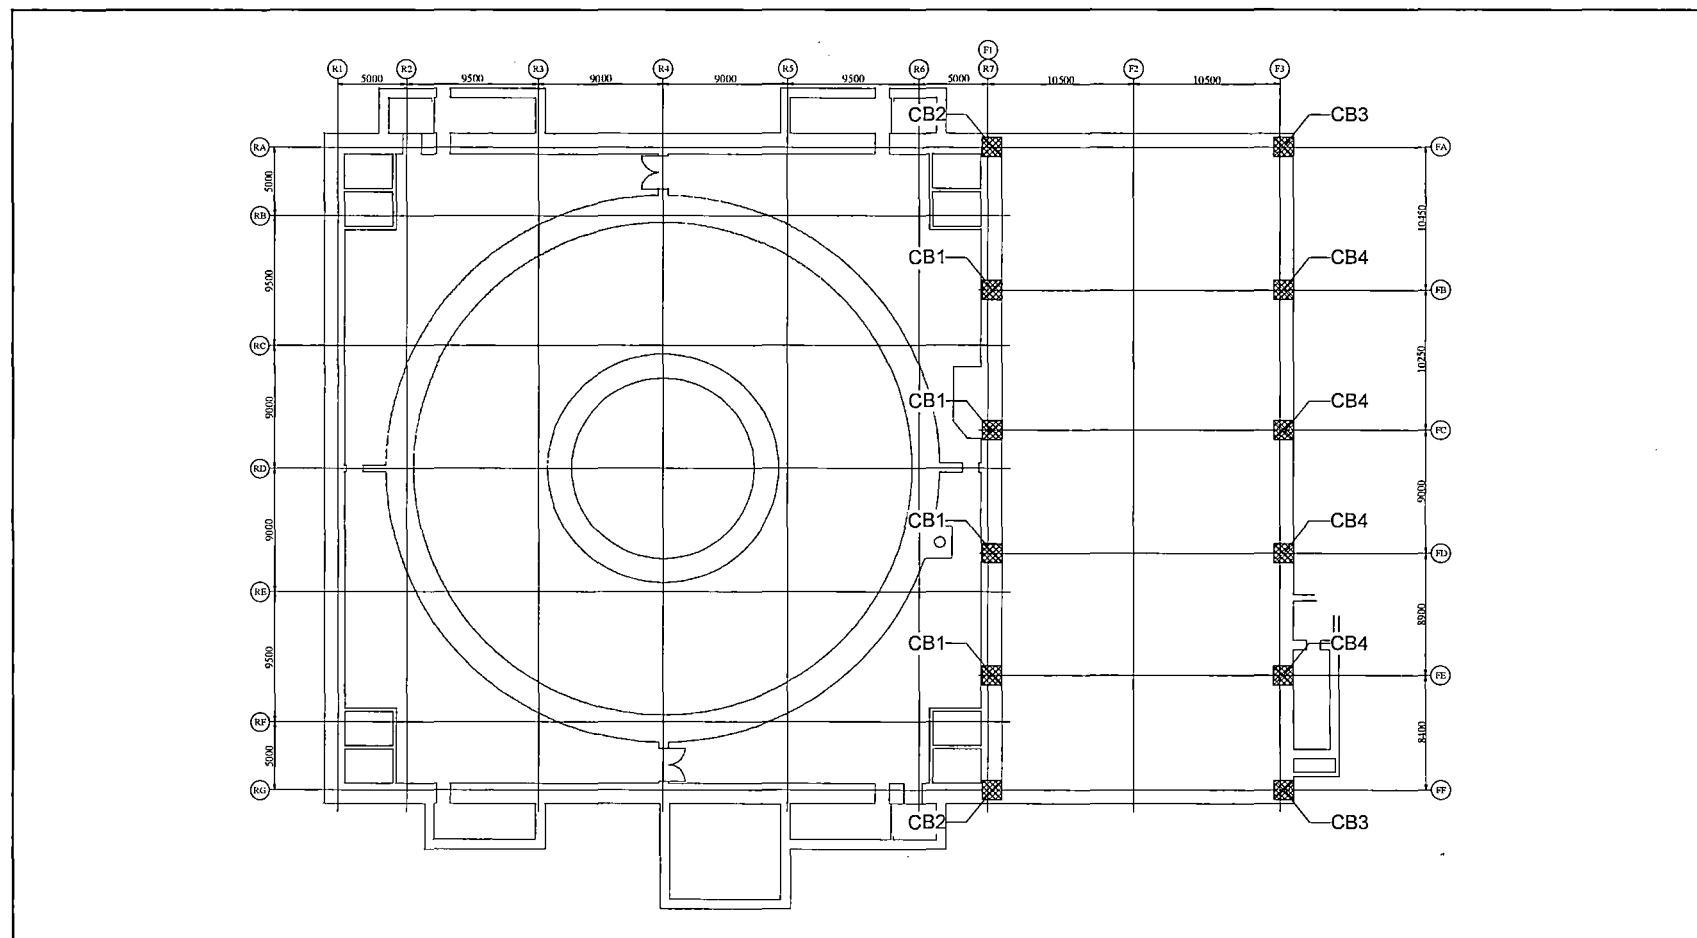


Figure 6.2.3.4-35 Application of Thermal Load on the Reinforced Concrete Girder and Column (EL 9,060)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 403

REV. 2

of 543

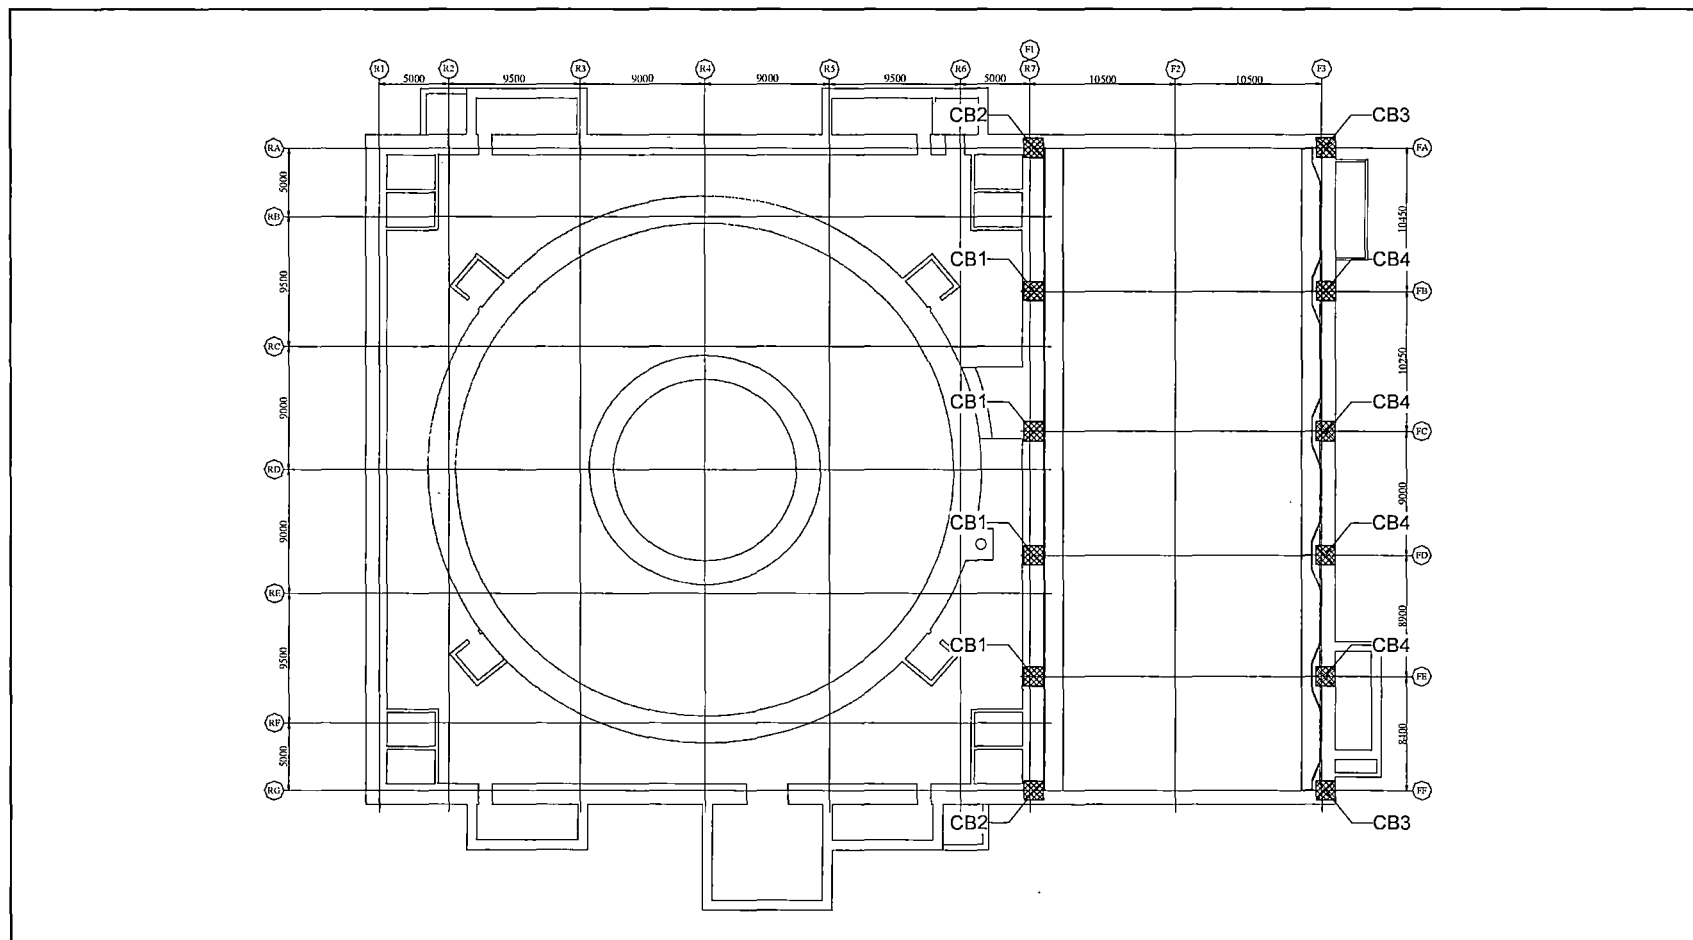


Figure 6.2.3.4-36 Application of Thermal Load on the Reinforced Concrete Girder and Column (EL 13,570)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 404

REV. 2

of 543

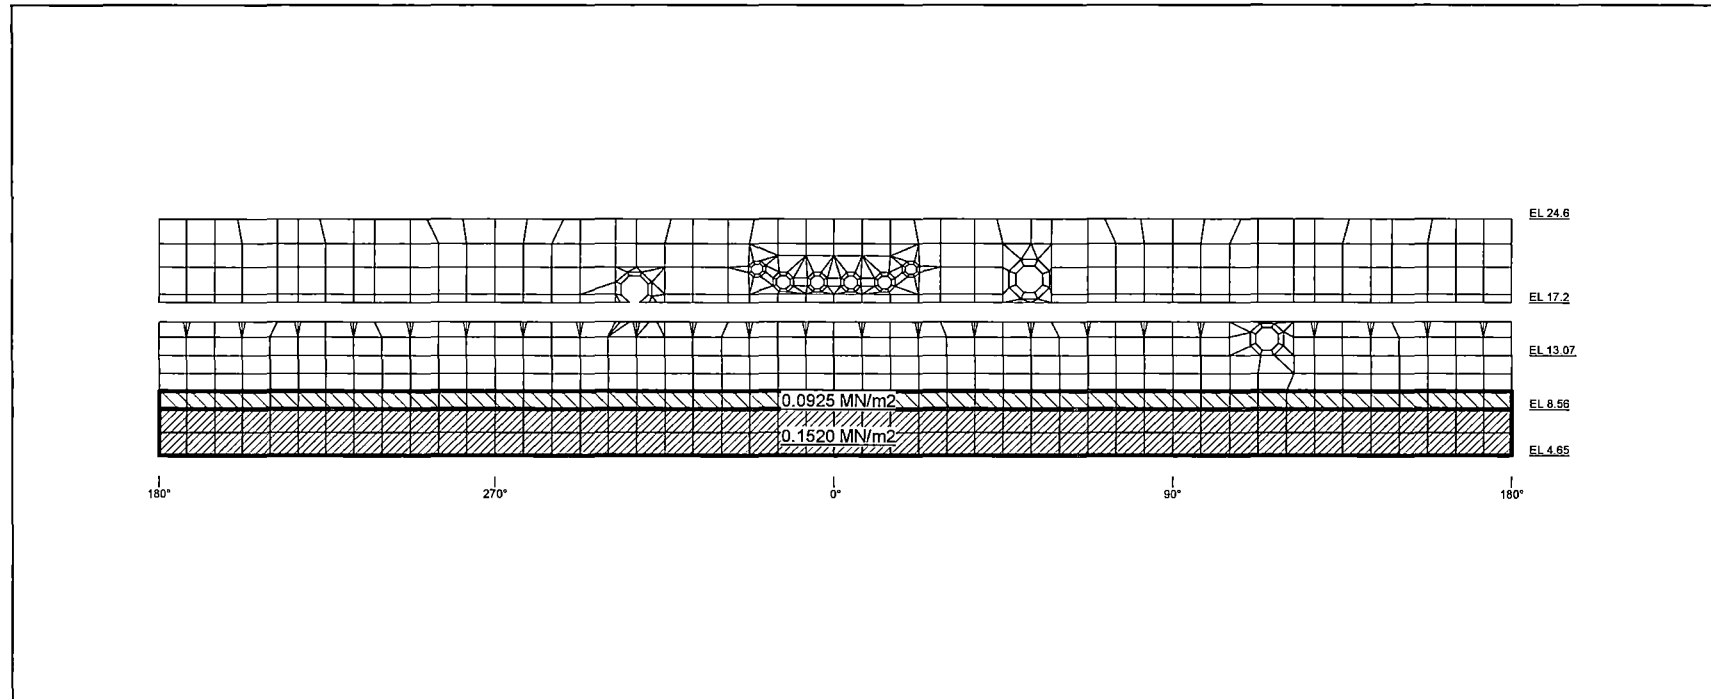


Figure 6.2.3.5-1 Application of Hydrodynamic Load on the RCCV Liner (SRV Positive)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 405

REV. 2

of 543

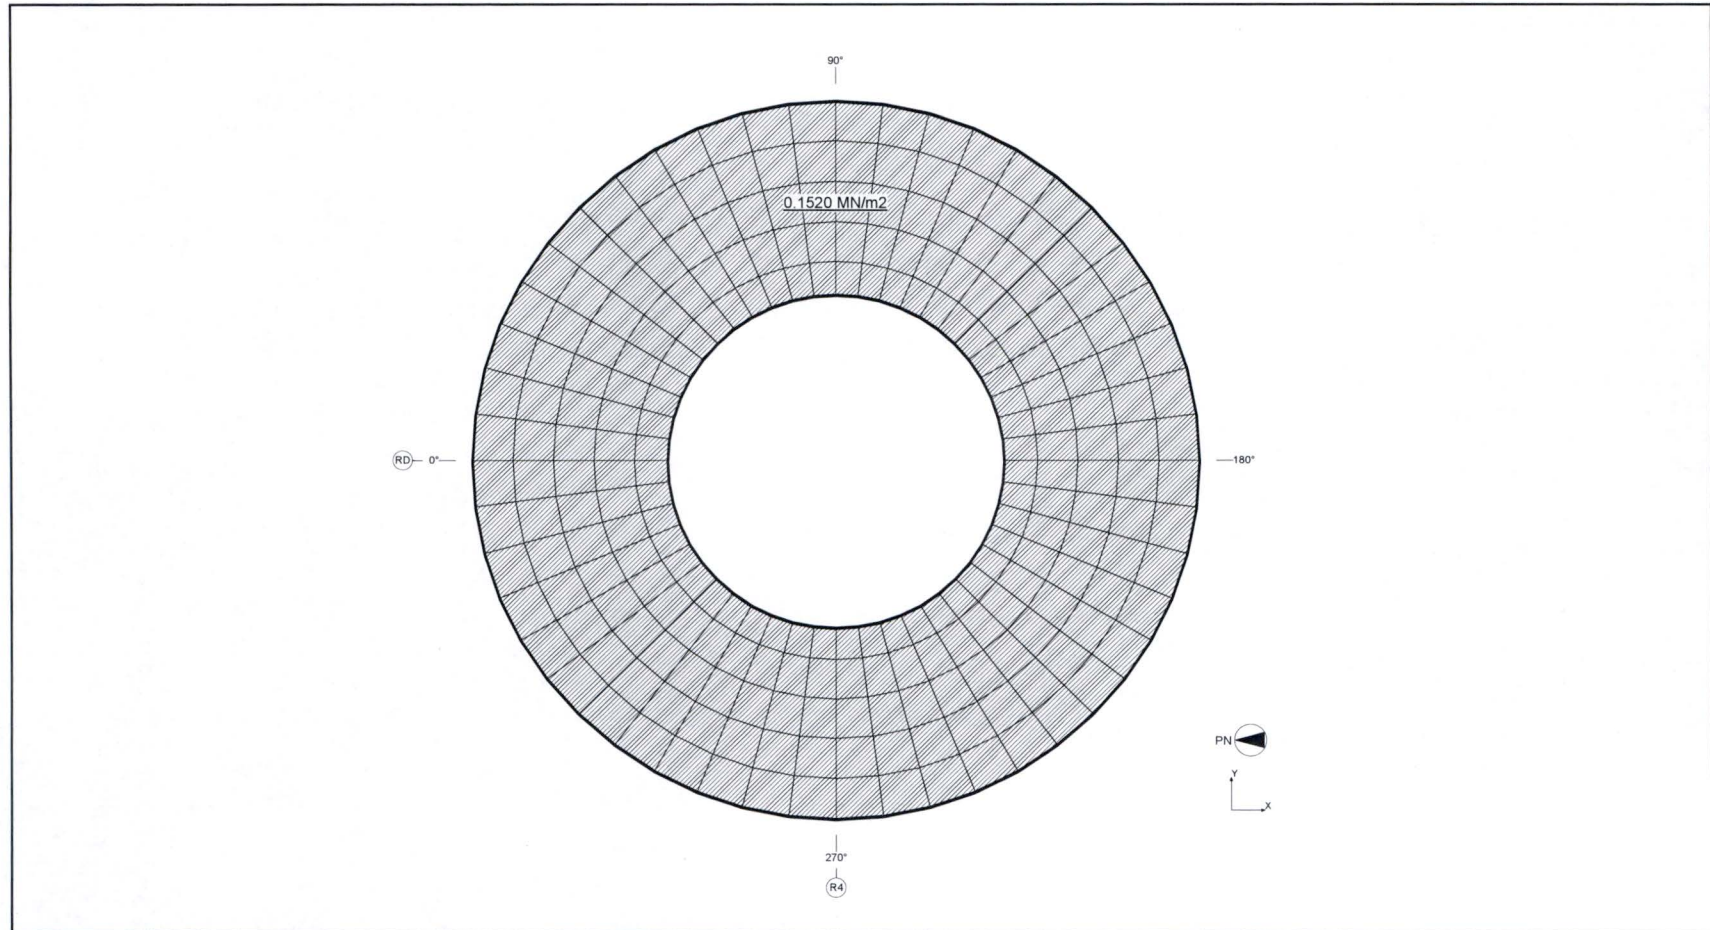


Figure 6.2.3.5-2 Application of Hydrodynamic Load on the Suppression Pool Slab Liner (SRV Positive)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 406

REV. 2

of 543

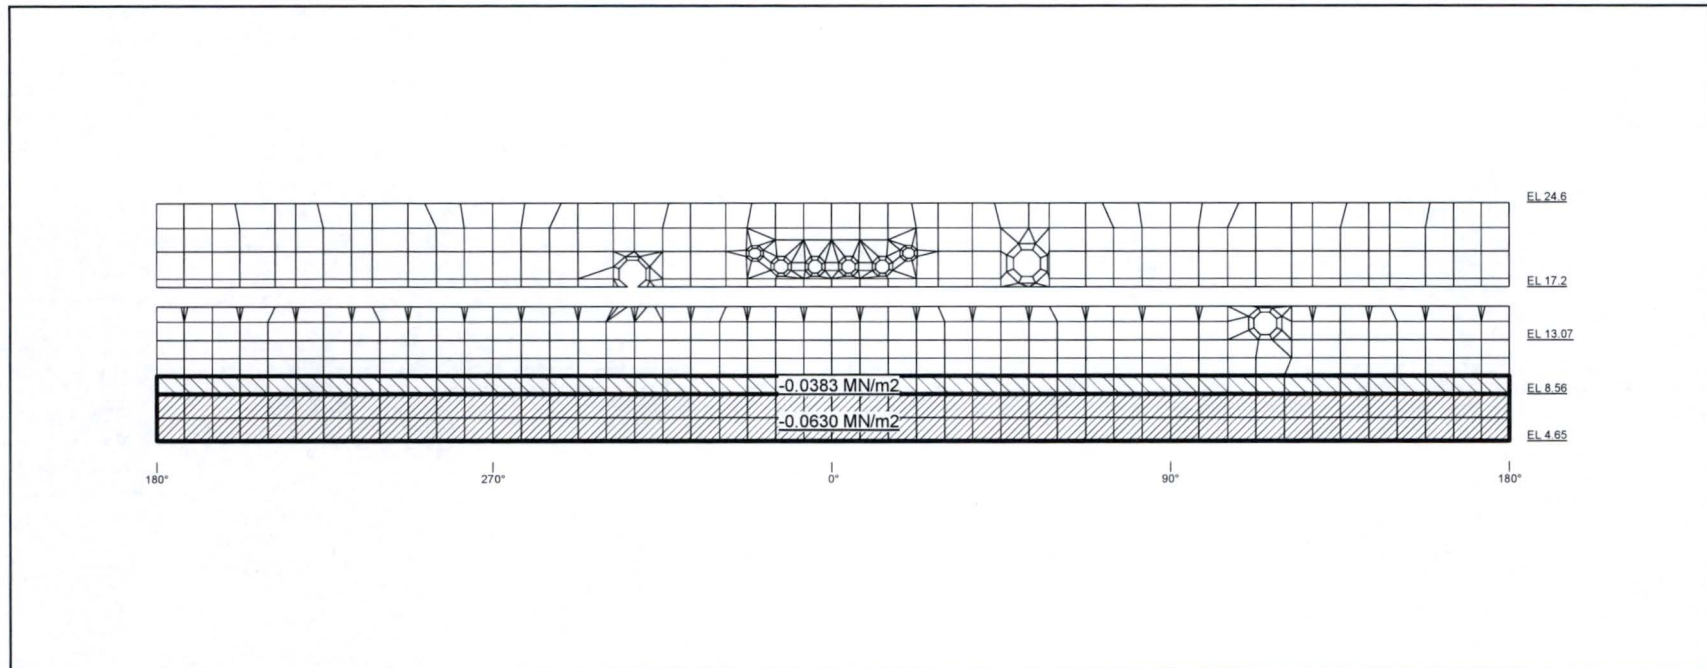


Figure 6.2.3.5-3 Application of Hydrodynamic Load on the RCCV Liner (SRV; Negative)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 407

REV. 2

of 543

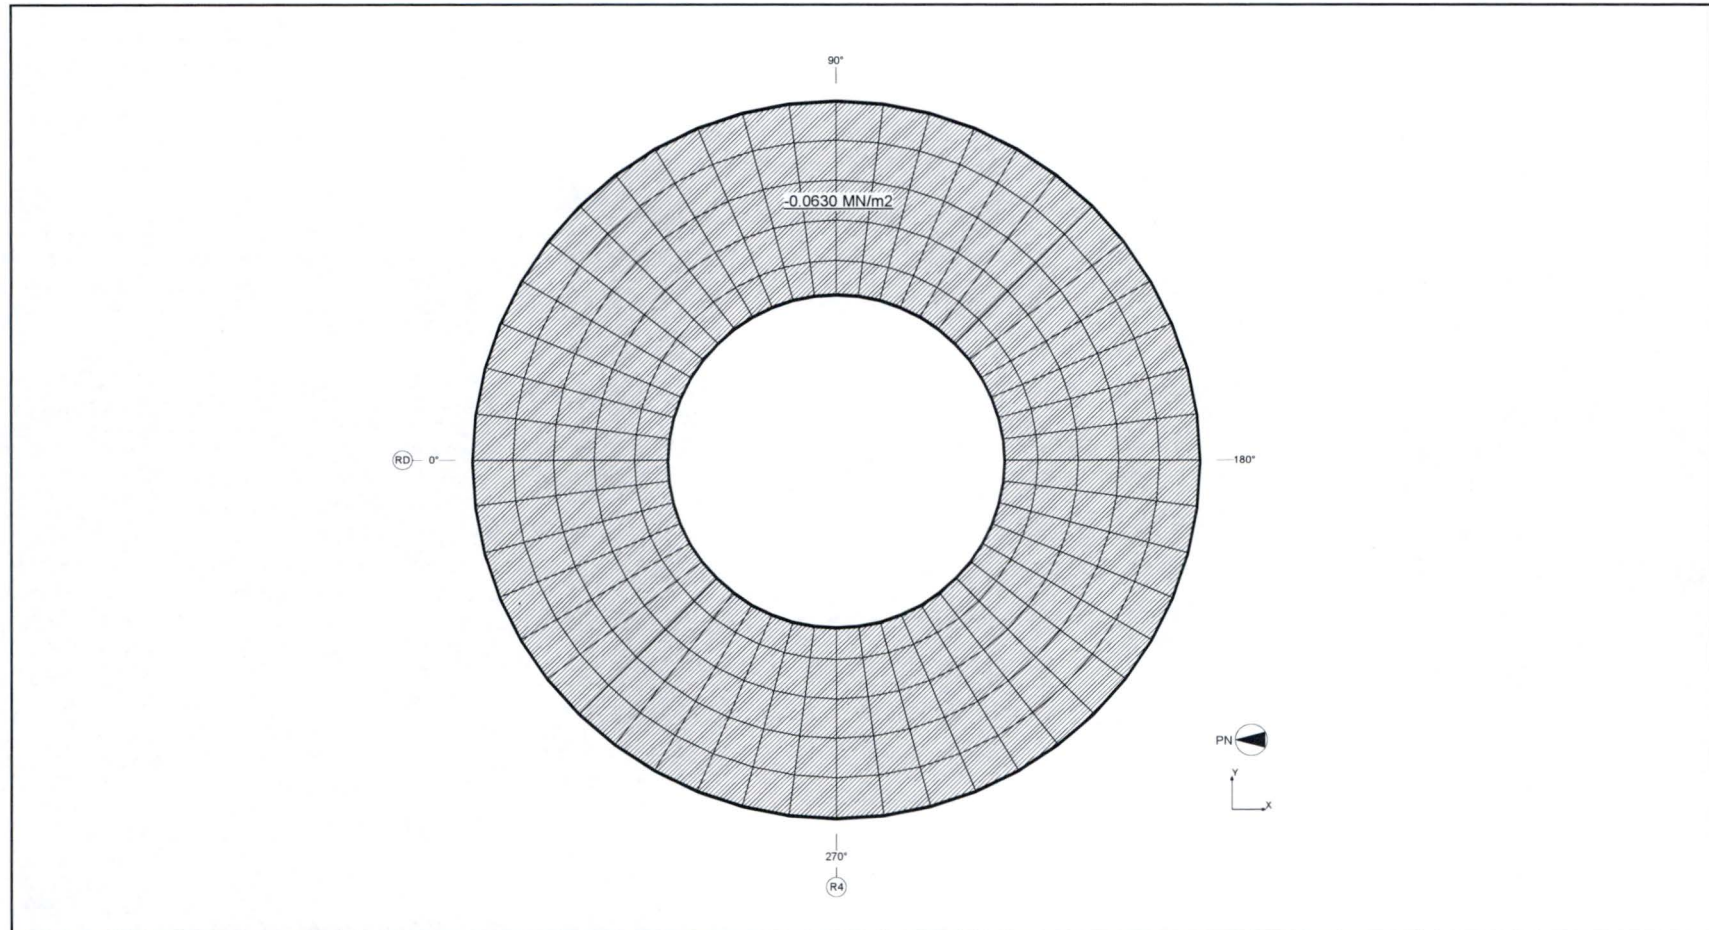


Figure 6.2.3.5-4 Application of Hydrodynamic Load on the Suppression Pool Slab Liner (SRV Negative)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 408

REV. 2

of 543

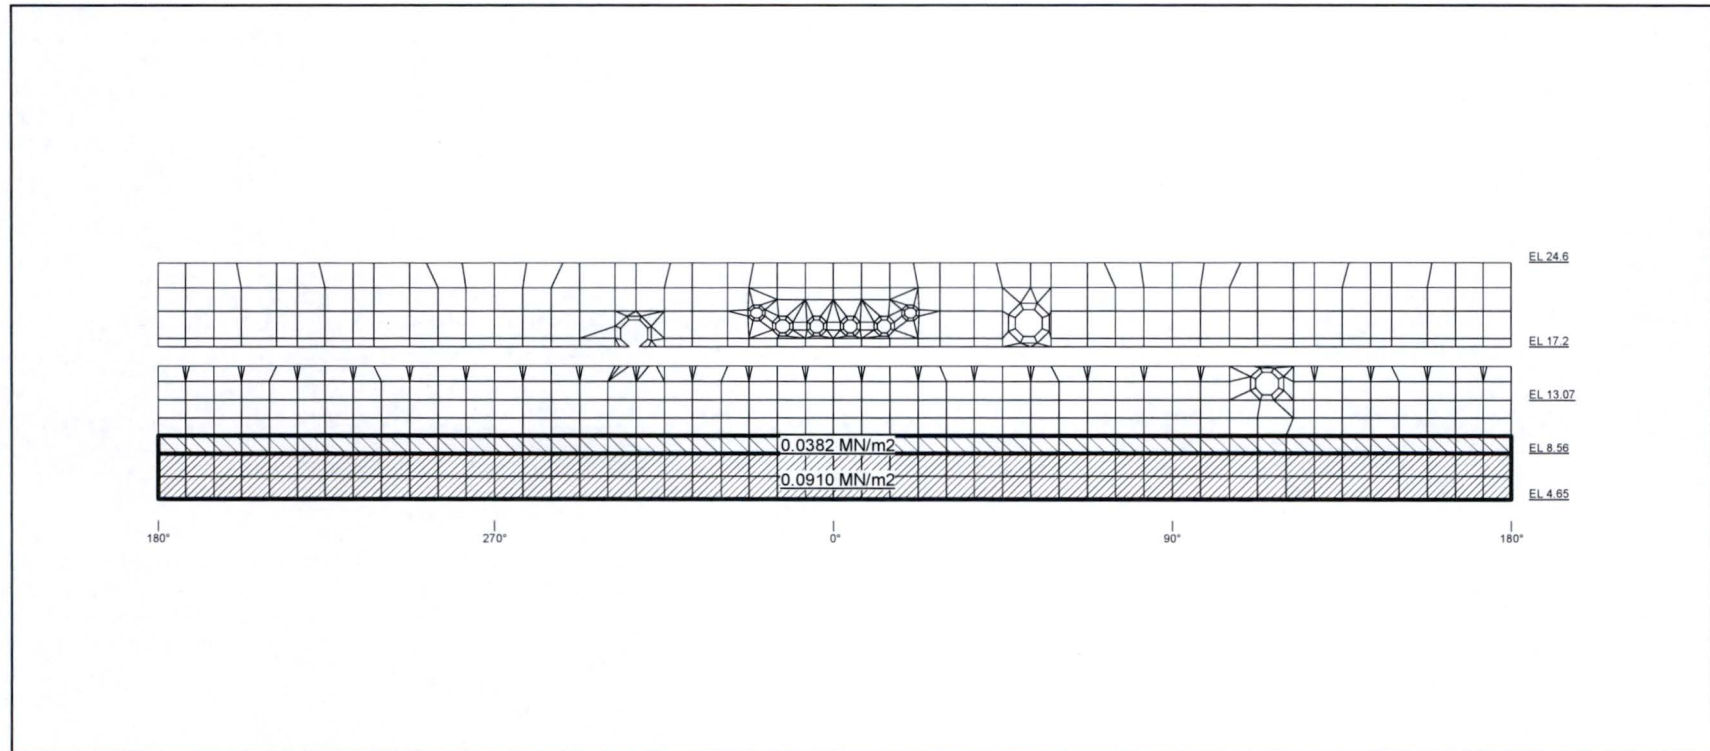


Figure 6.2.3.5-5 Application of Hydrodynamic Load on the RCCV Liner (CH Positive)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 409

REV. 2

of 543

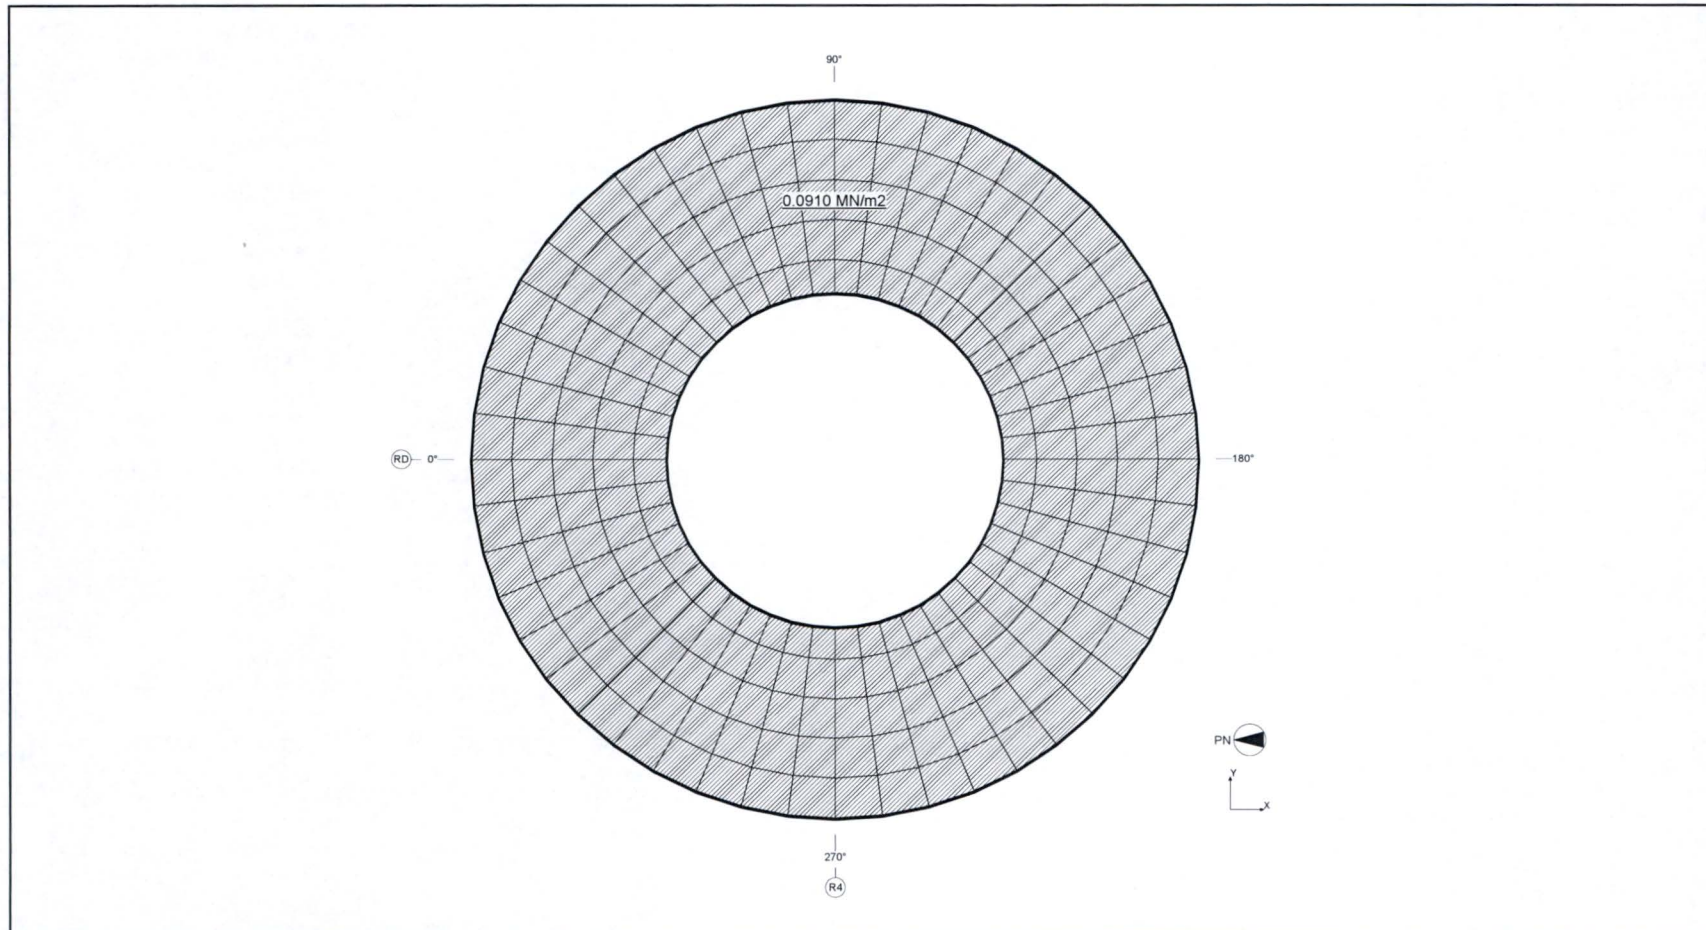


Figure 6.2.3.5-6 Application of Hydrodynamic Load on the Suppression Pool Slab Liner (CH Positive)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 410

REV. 2

of 543

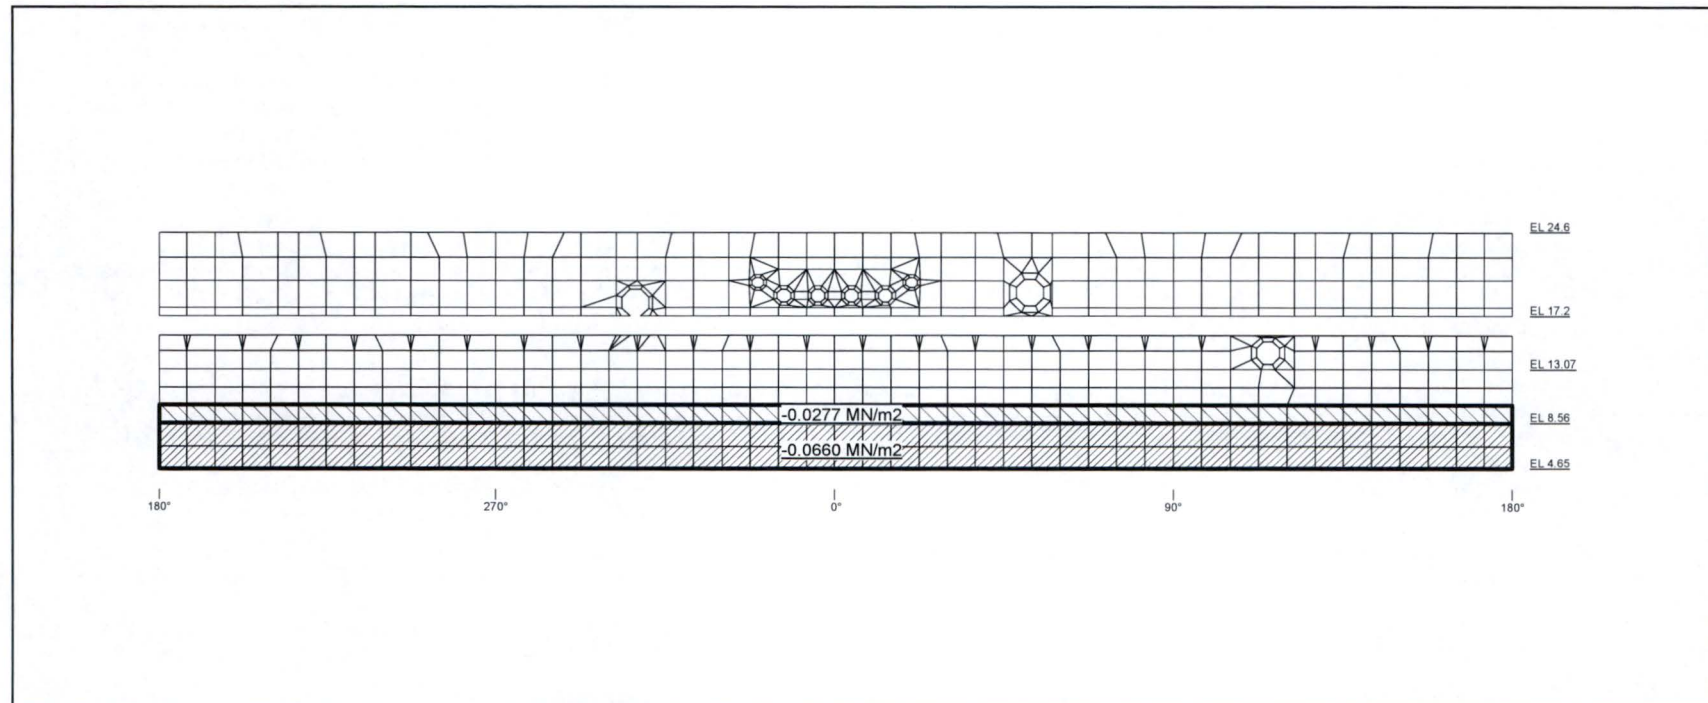


Figure 6.2.3.5-7 Application of Hydrodynamic Load on the RCCV Liner (CH; Negative)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 411

REV. 2

of 543

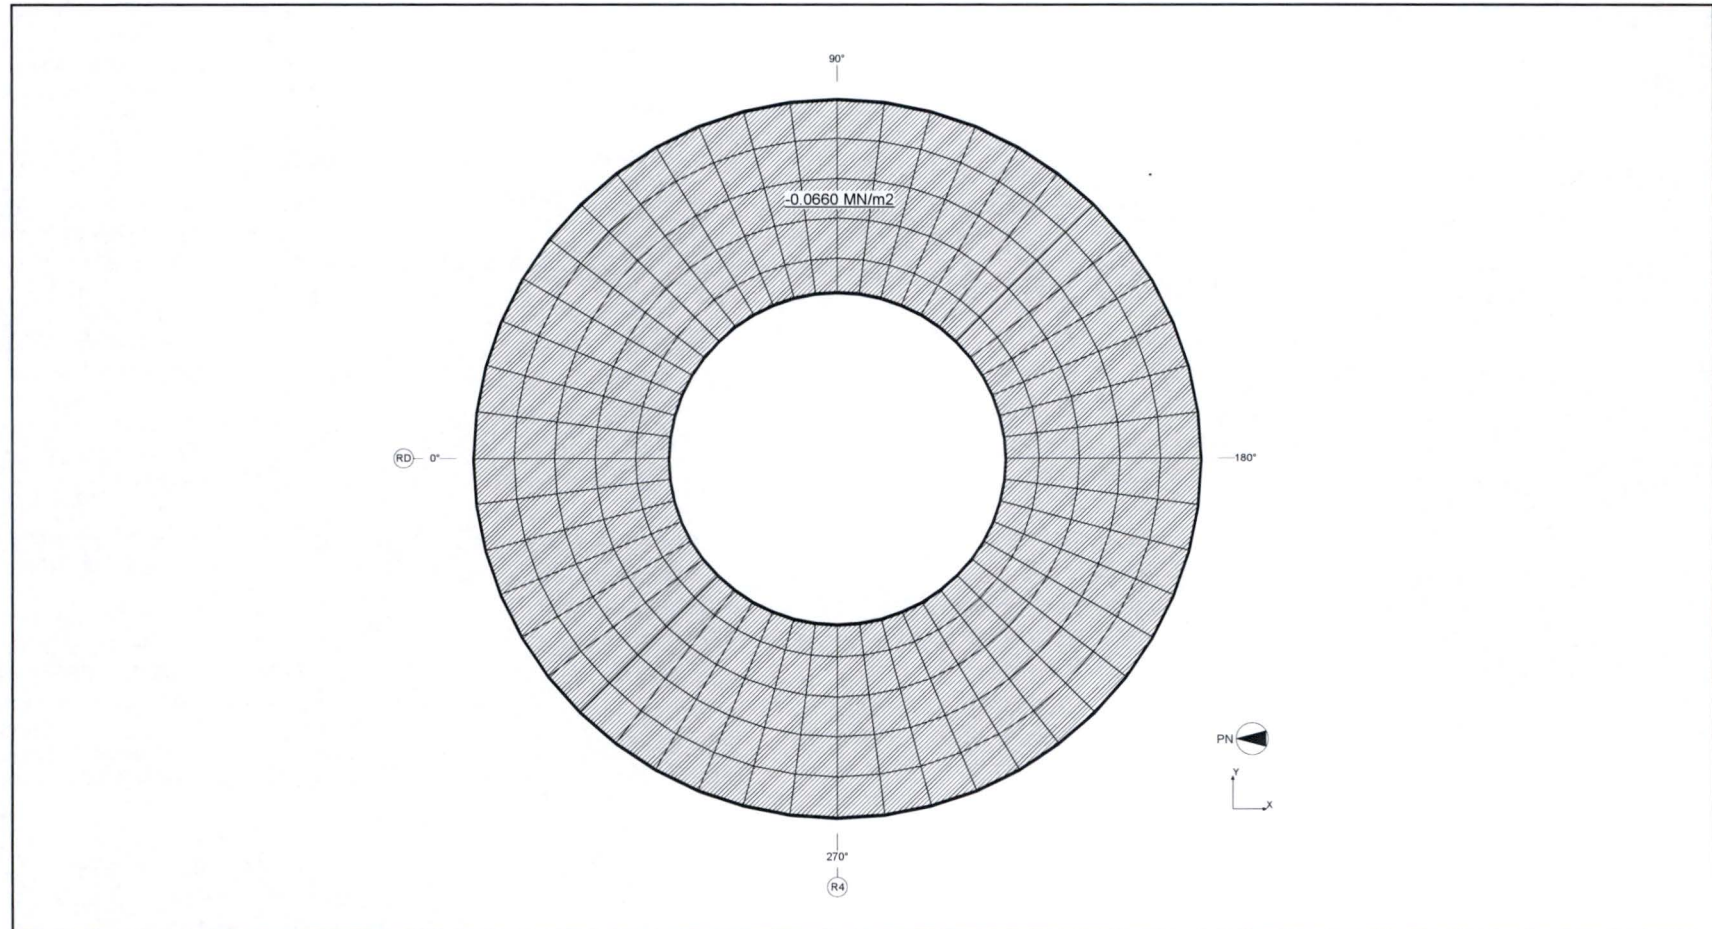


Figure 6.2.3.5-8 Application of Hydrodynamic Load on the Suppression Pool Slab Liner (CH Negative)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 412

REV. 2

of 543

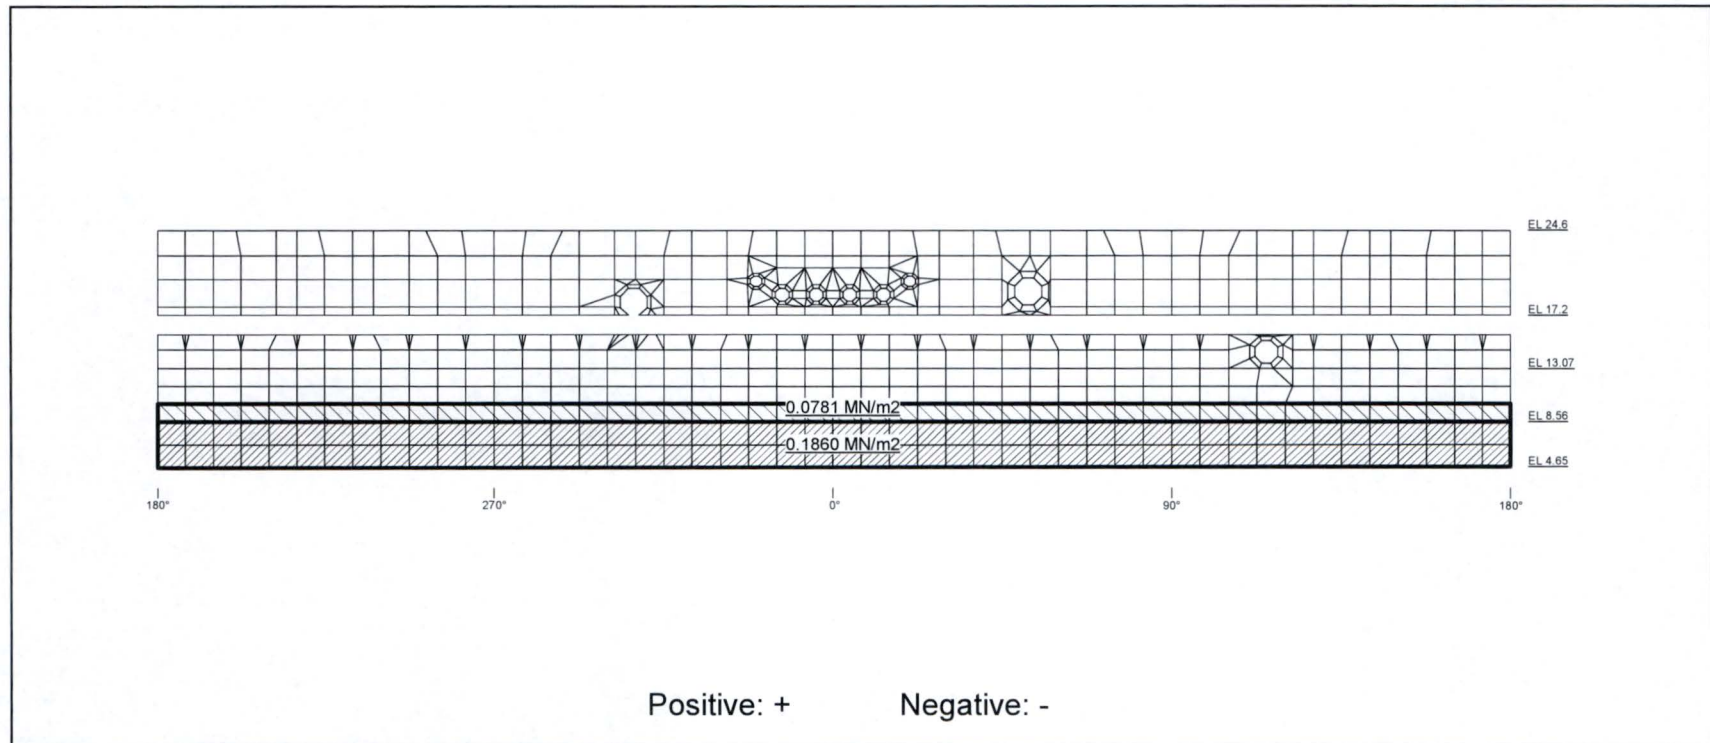


Figure 6.2.3.5-9 Application of Hydrodynamic Load on the RCCV Liner (CO Positive/Negative)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 413

REV. 2

of 543

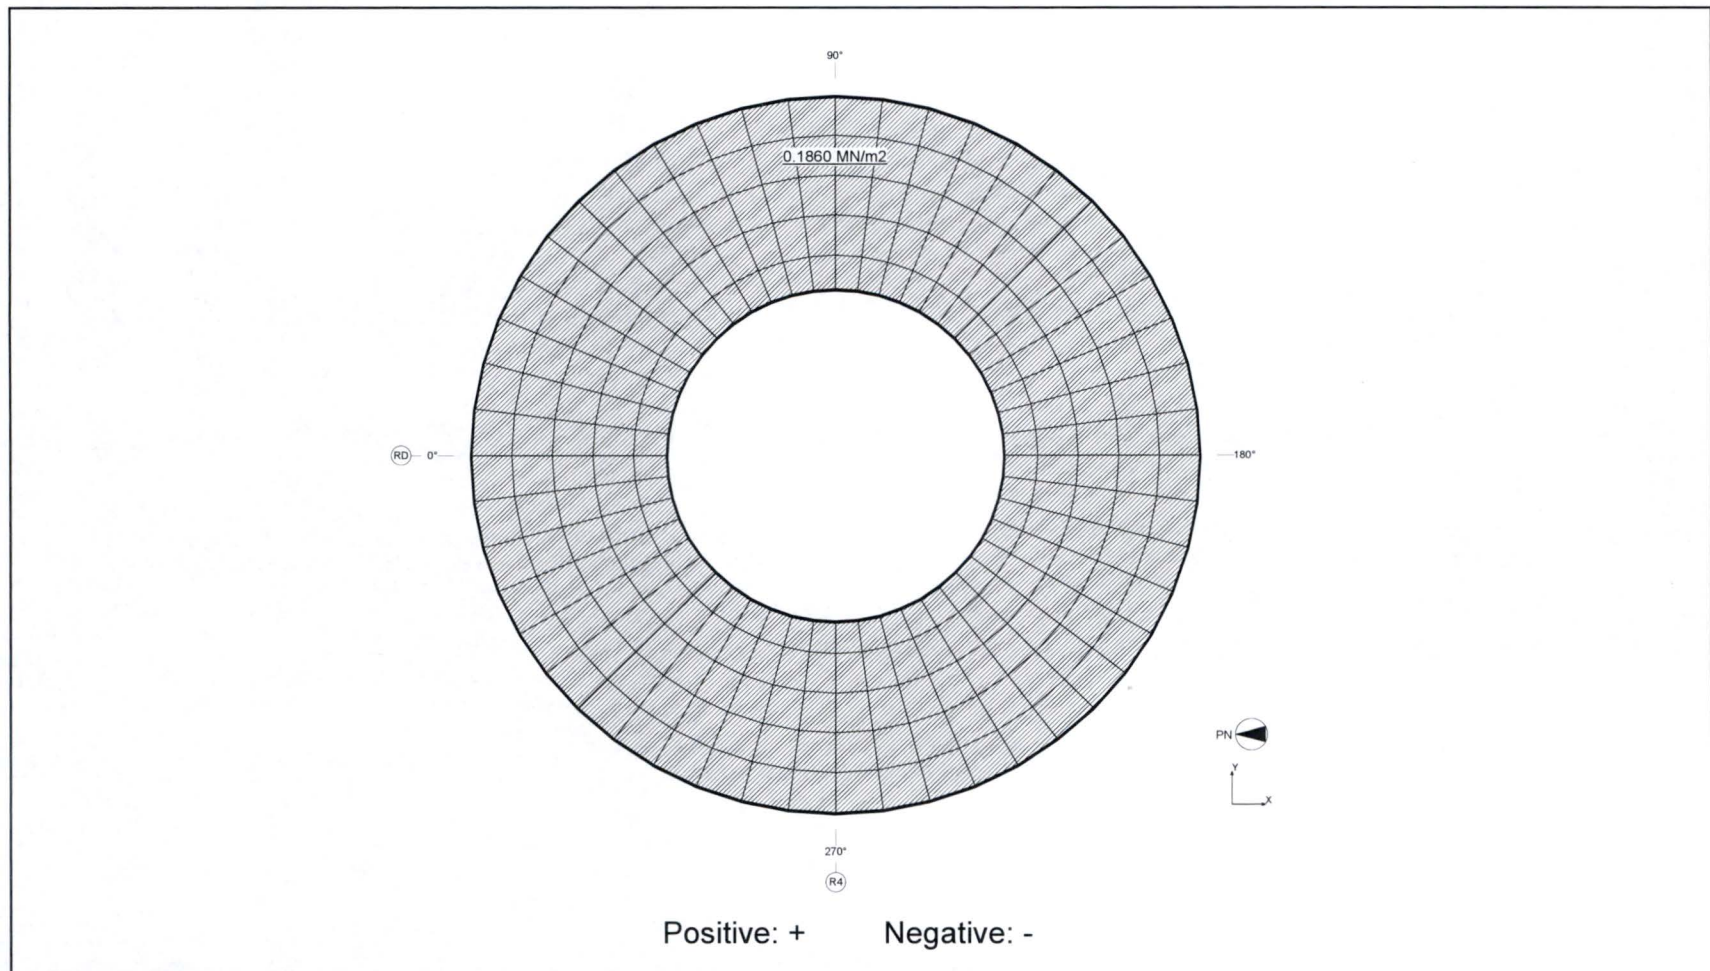


Figure 6.2.3.5-10 Application of Hydrodynamic Load on the Suppression Pool Slab Liner (CO Positive/Negative)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 414

REV. 2

of 543

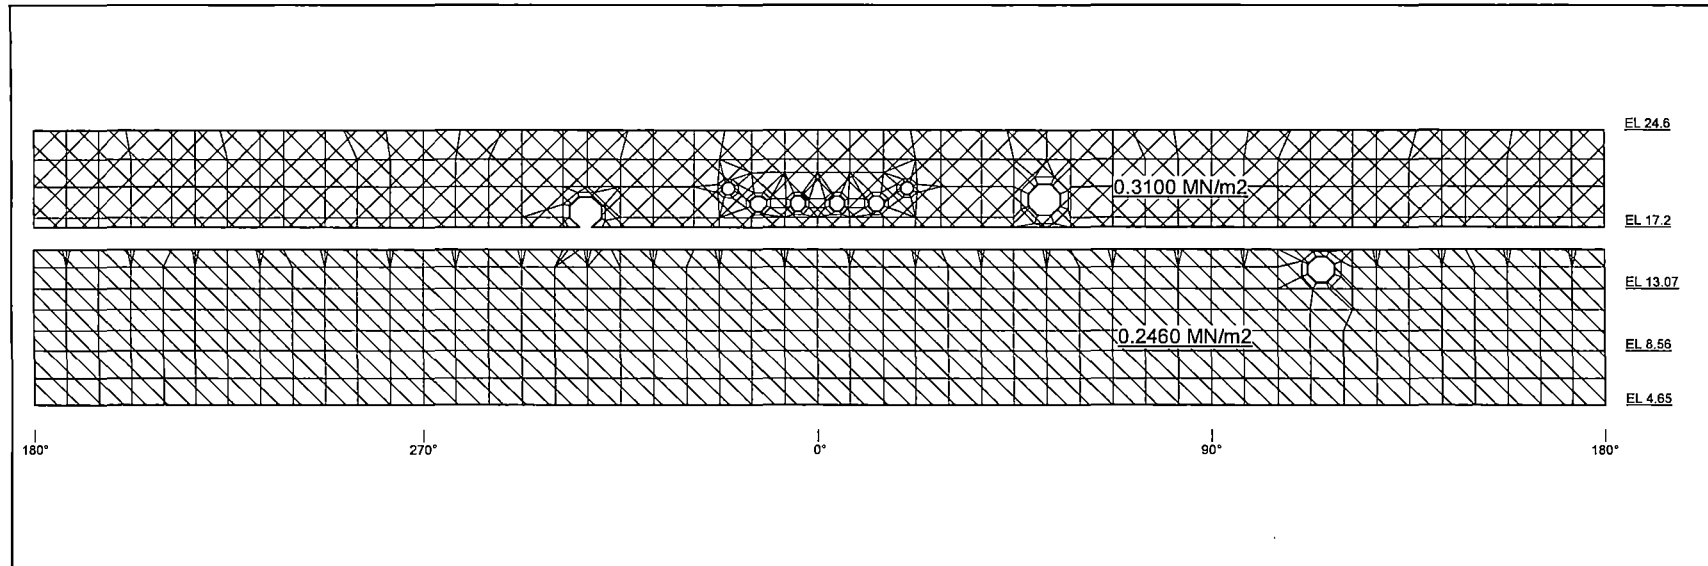


Figure 6.2.3.5-11 Application of Hydrodynamic Load on the RCCV Liner (PS)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 415

REV. 2

of 543

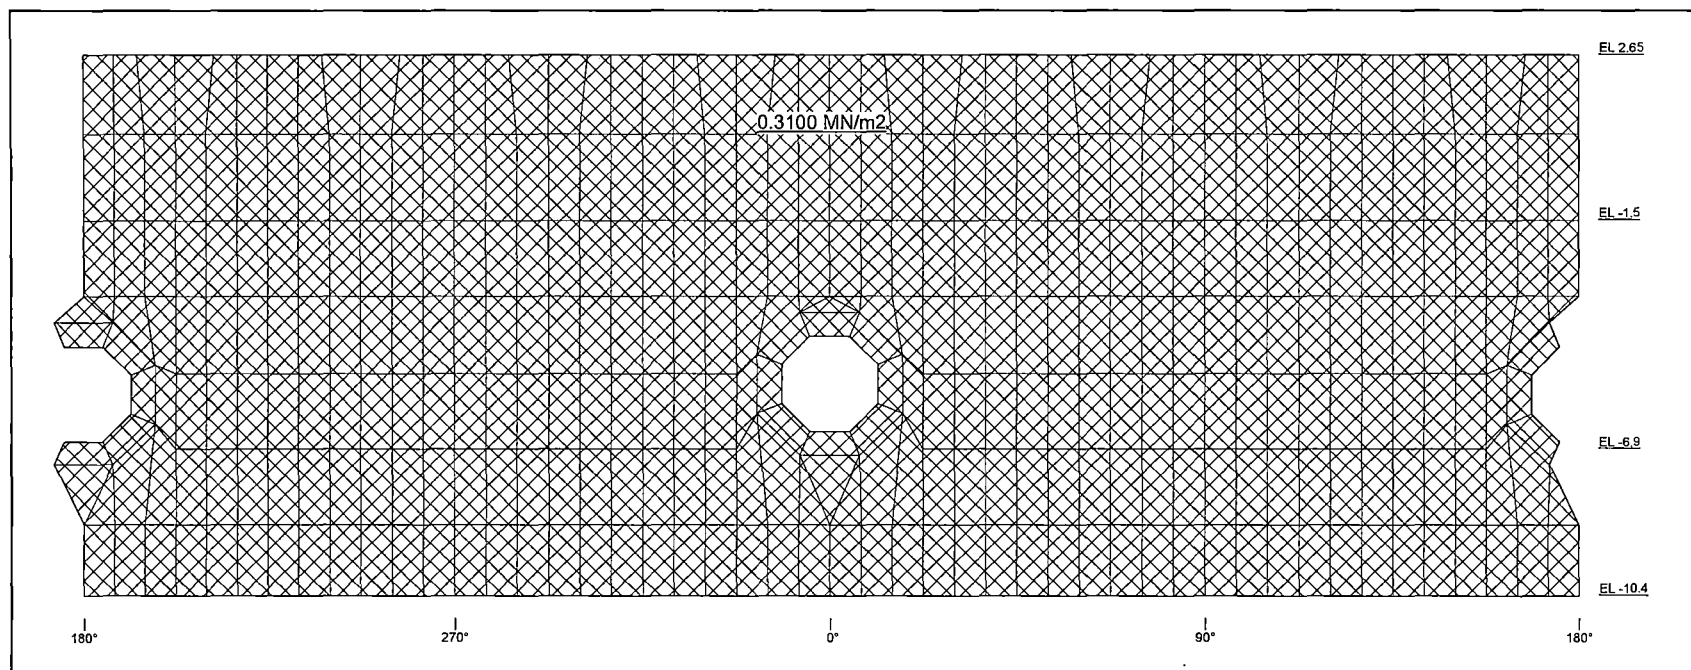


Figure 6.2.3.5-12 Application of Hydrodynamic Load on the RPV Pedestal Liner (PS)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 416

REV. 2

of 543

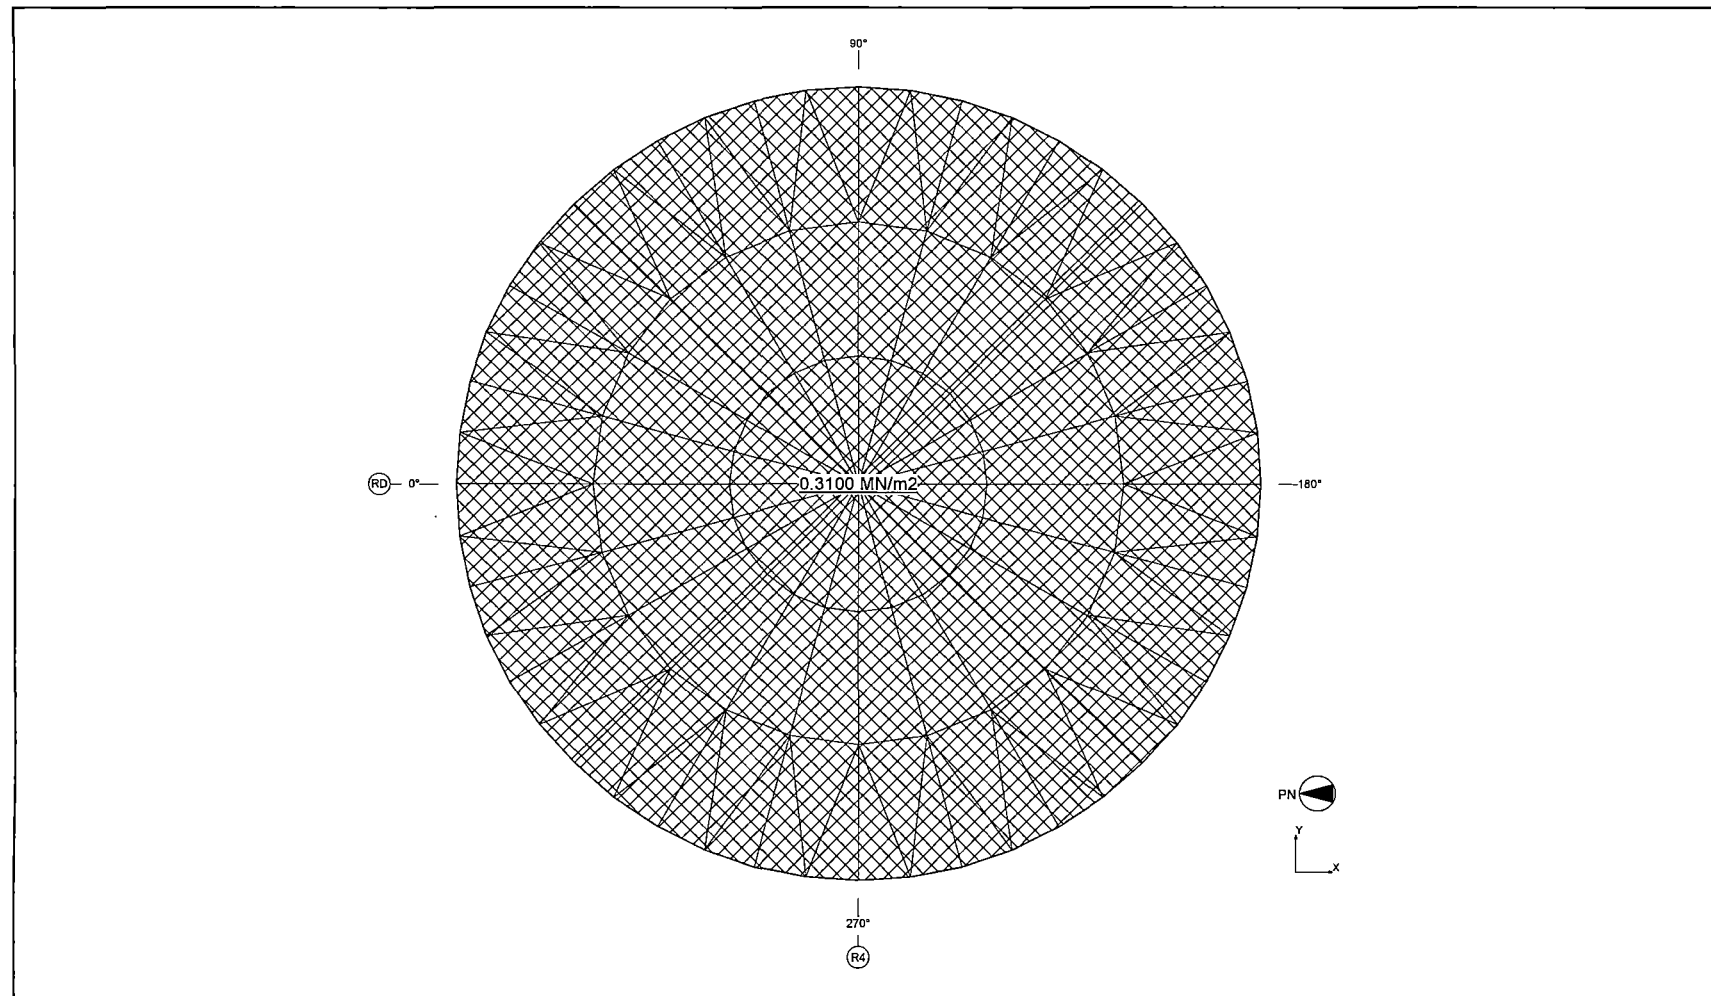


Figure 6.2.3.5-13 Application of Hydrodynamic Load on the Basemat Liner (PS)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 417

REV. 2

of 543

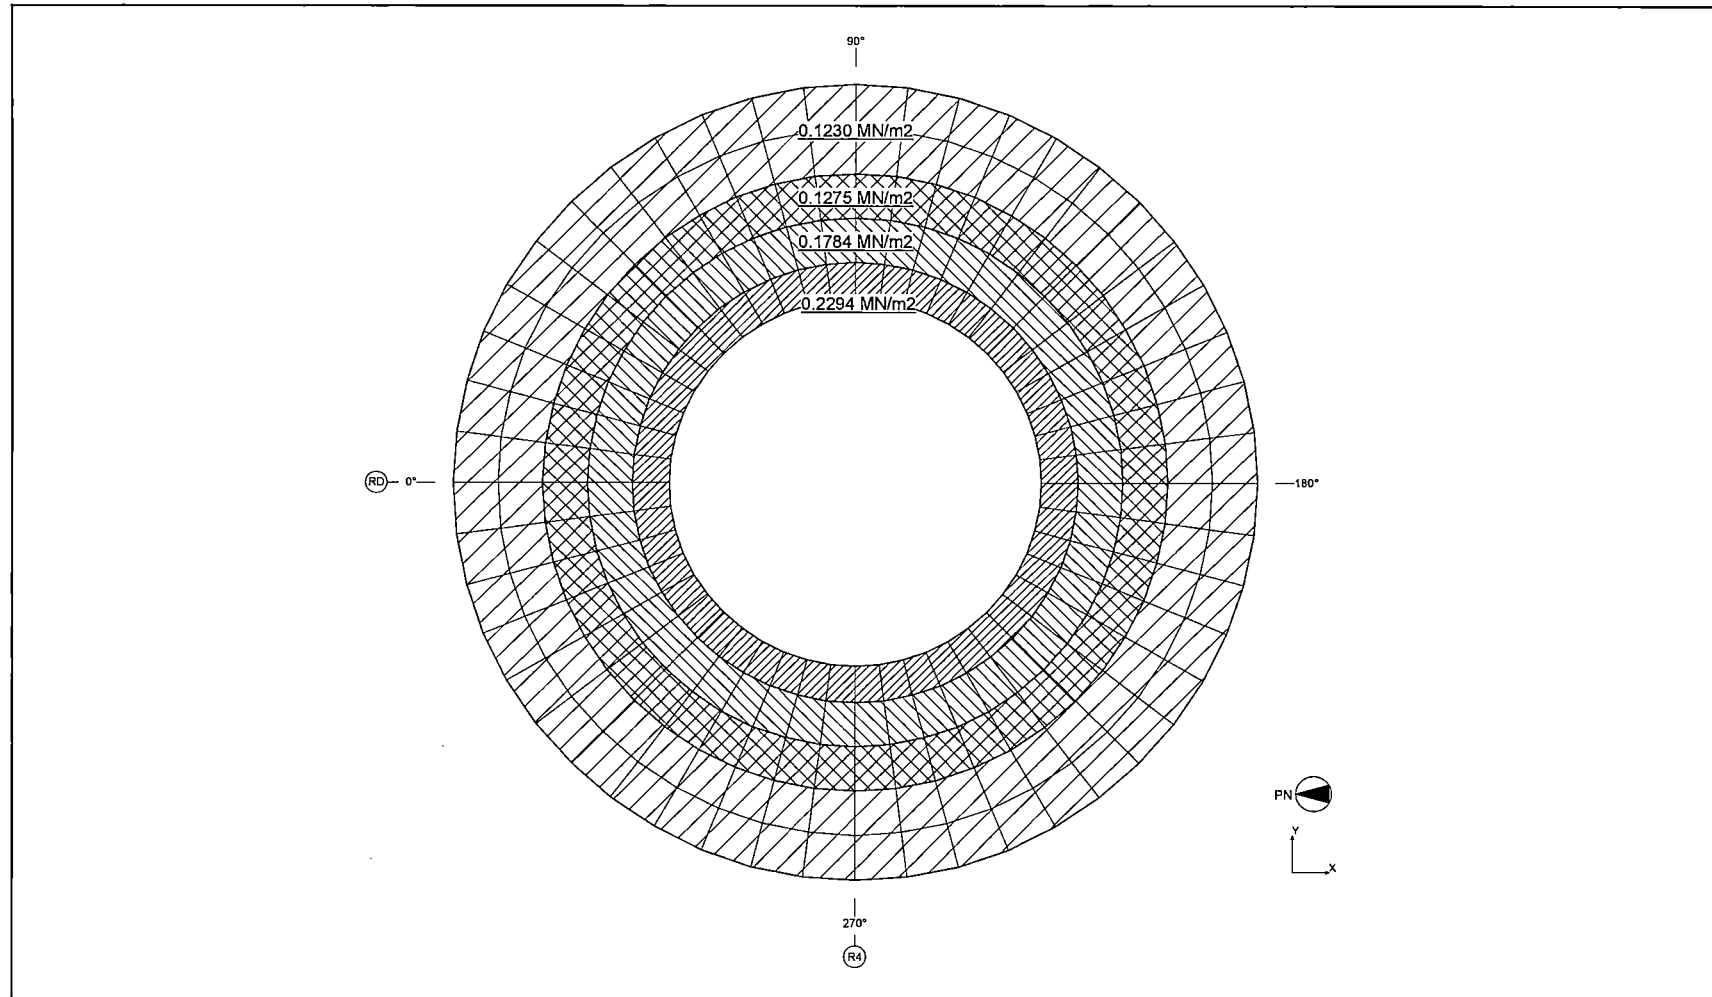


Figure 6.2.3.5-14 Application of Hydrodynamic Load on the Suppression Pool Slab Liner (PS)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 418

REV. 2

of 543

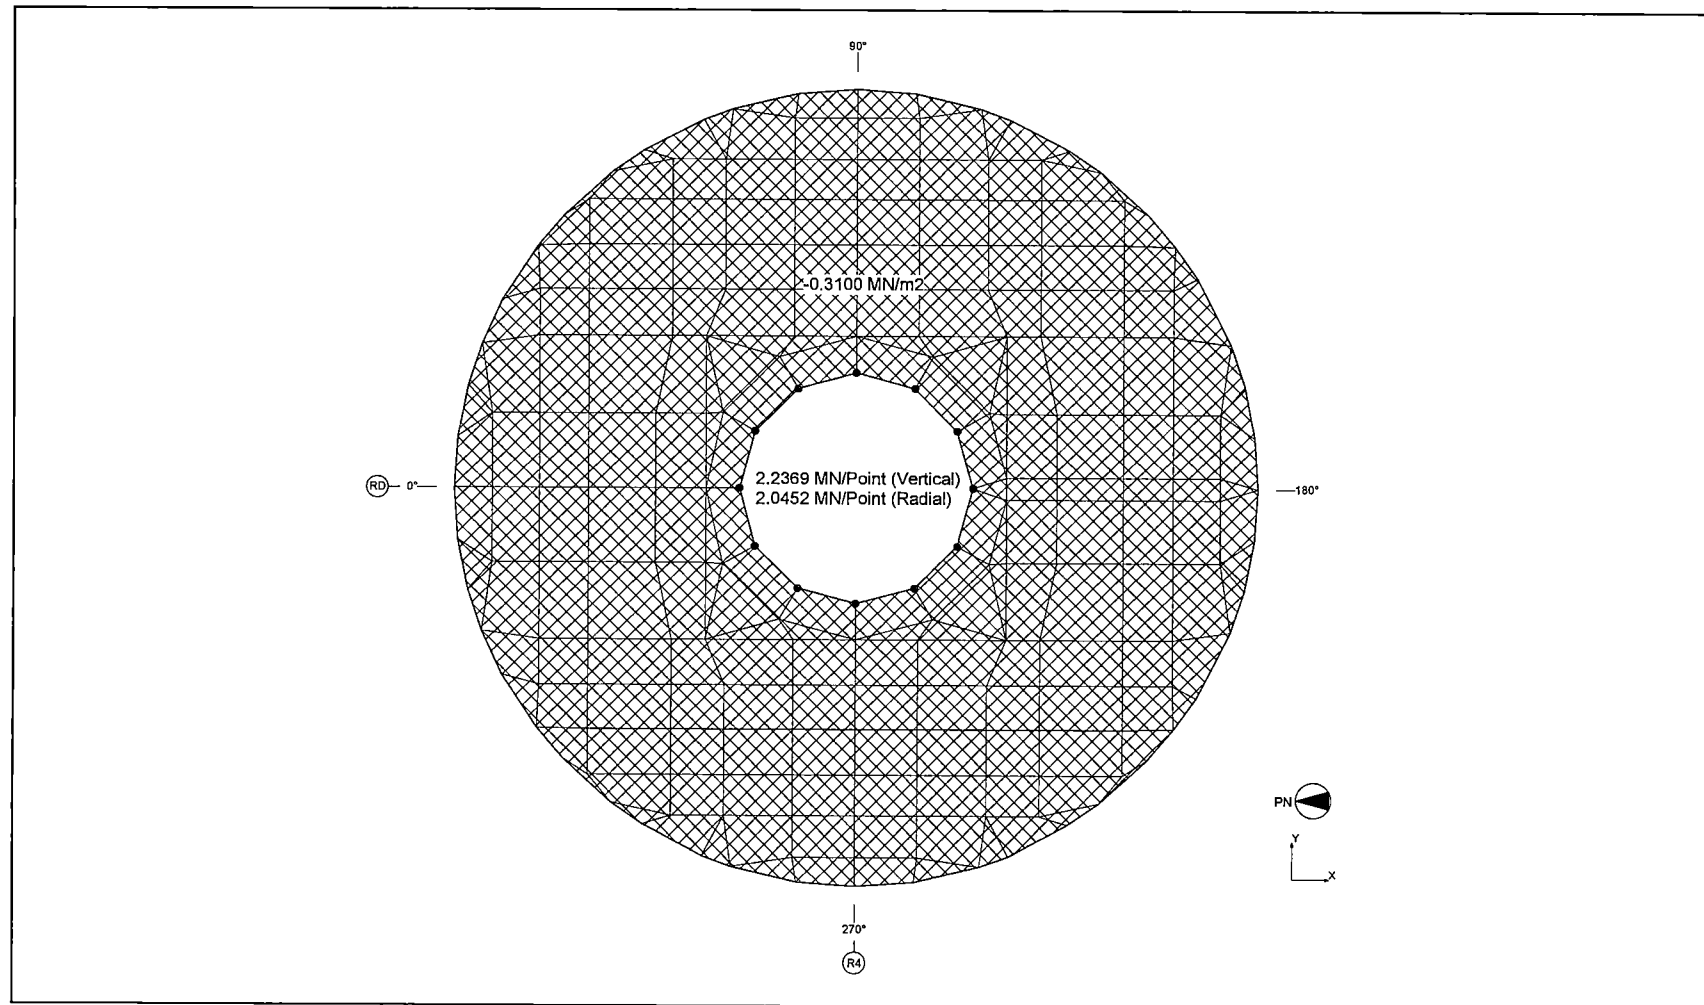


Figure 6.2.3.5-15 Application of Hydrodynamic Load on the Top Slab Liner (PS)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 419

REV. 2

of 543

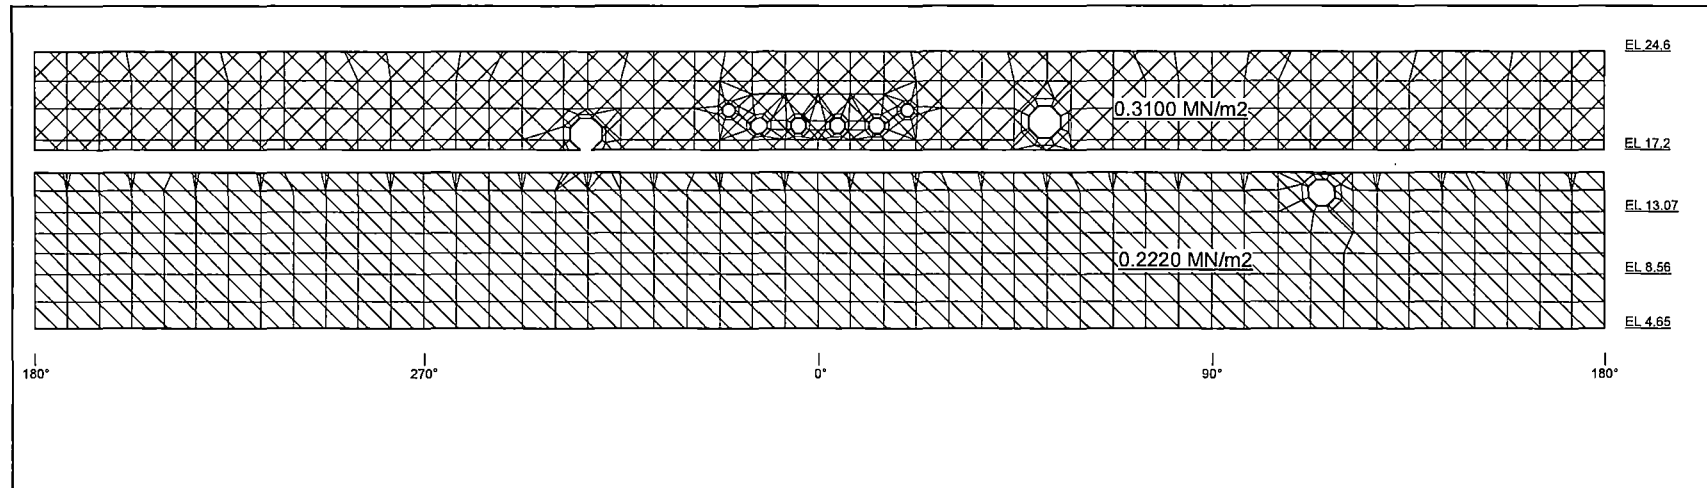


Figure 6.2.3.5-16 Application of Hydrodynamic Load on the RCCV Liner (PS: Pressure Concurrent with Froth Impact Loads)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 420

REV. 2

of 543

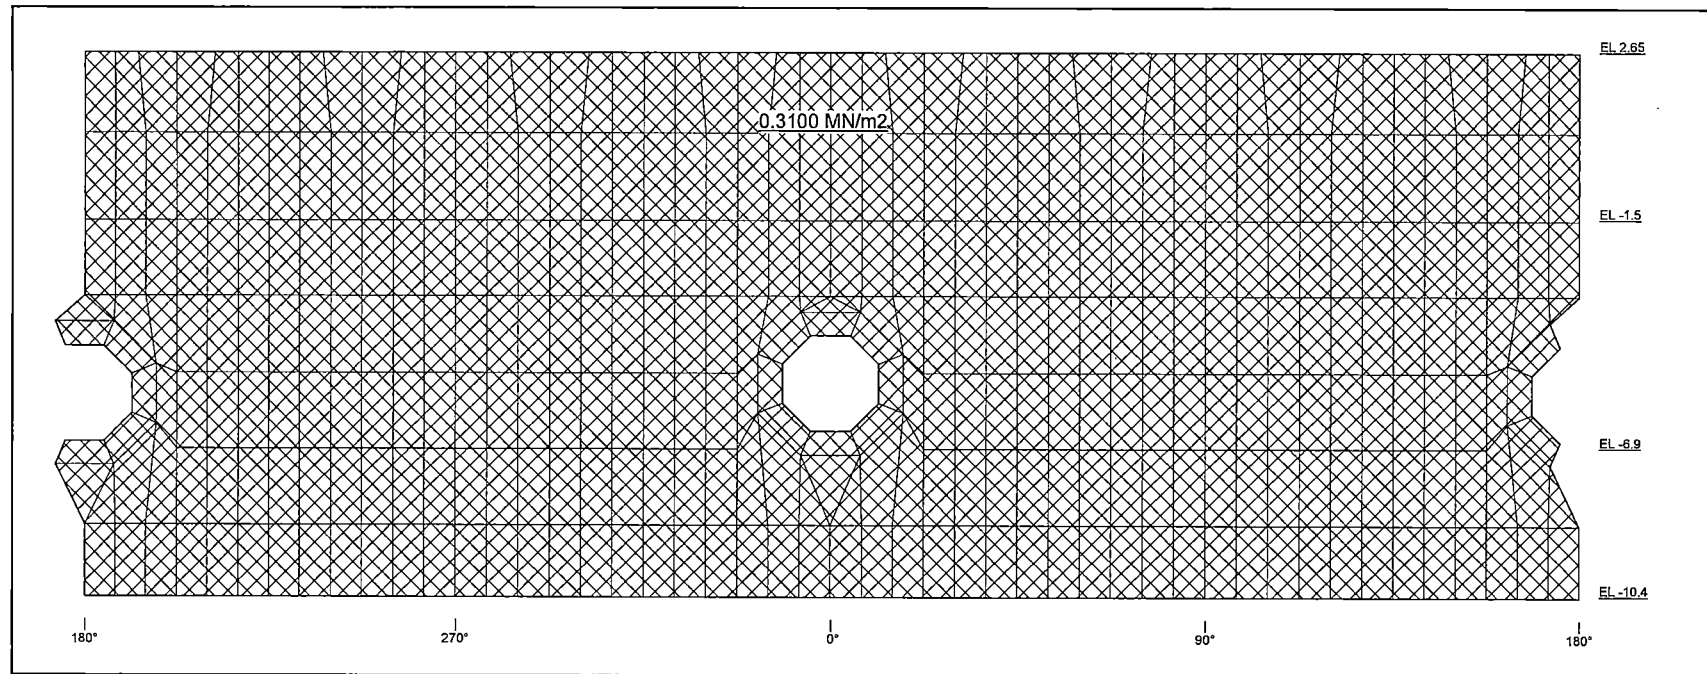


Figure 6.2.3.5-17 Application of Hydrodynamic Load on the RPV Pedestal Liner (PS: Pressure Concurrent with Froth Impact Loads)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 421

REV. 2

of 543

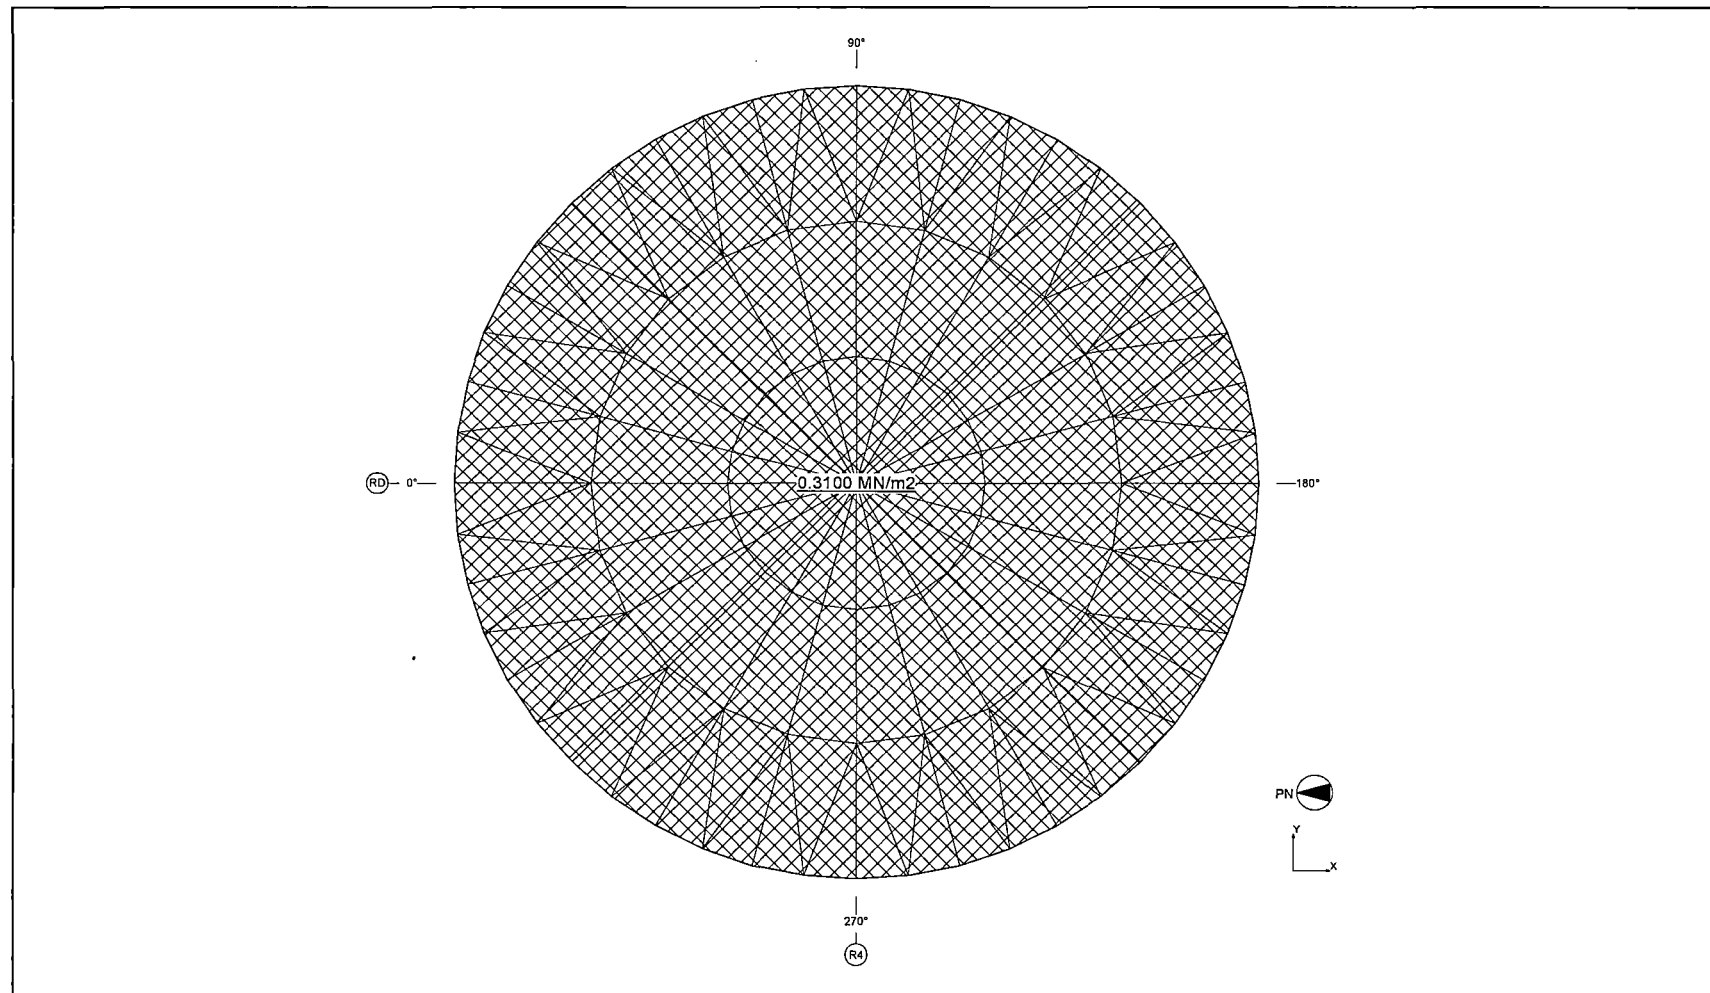


Figure 6.2.3.5-18 Application of Hydrodynamic Load on the Basemat Liner (PS: Pressure Concurrent with Froth Impact Loads)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 422

REV. 2

of 543

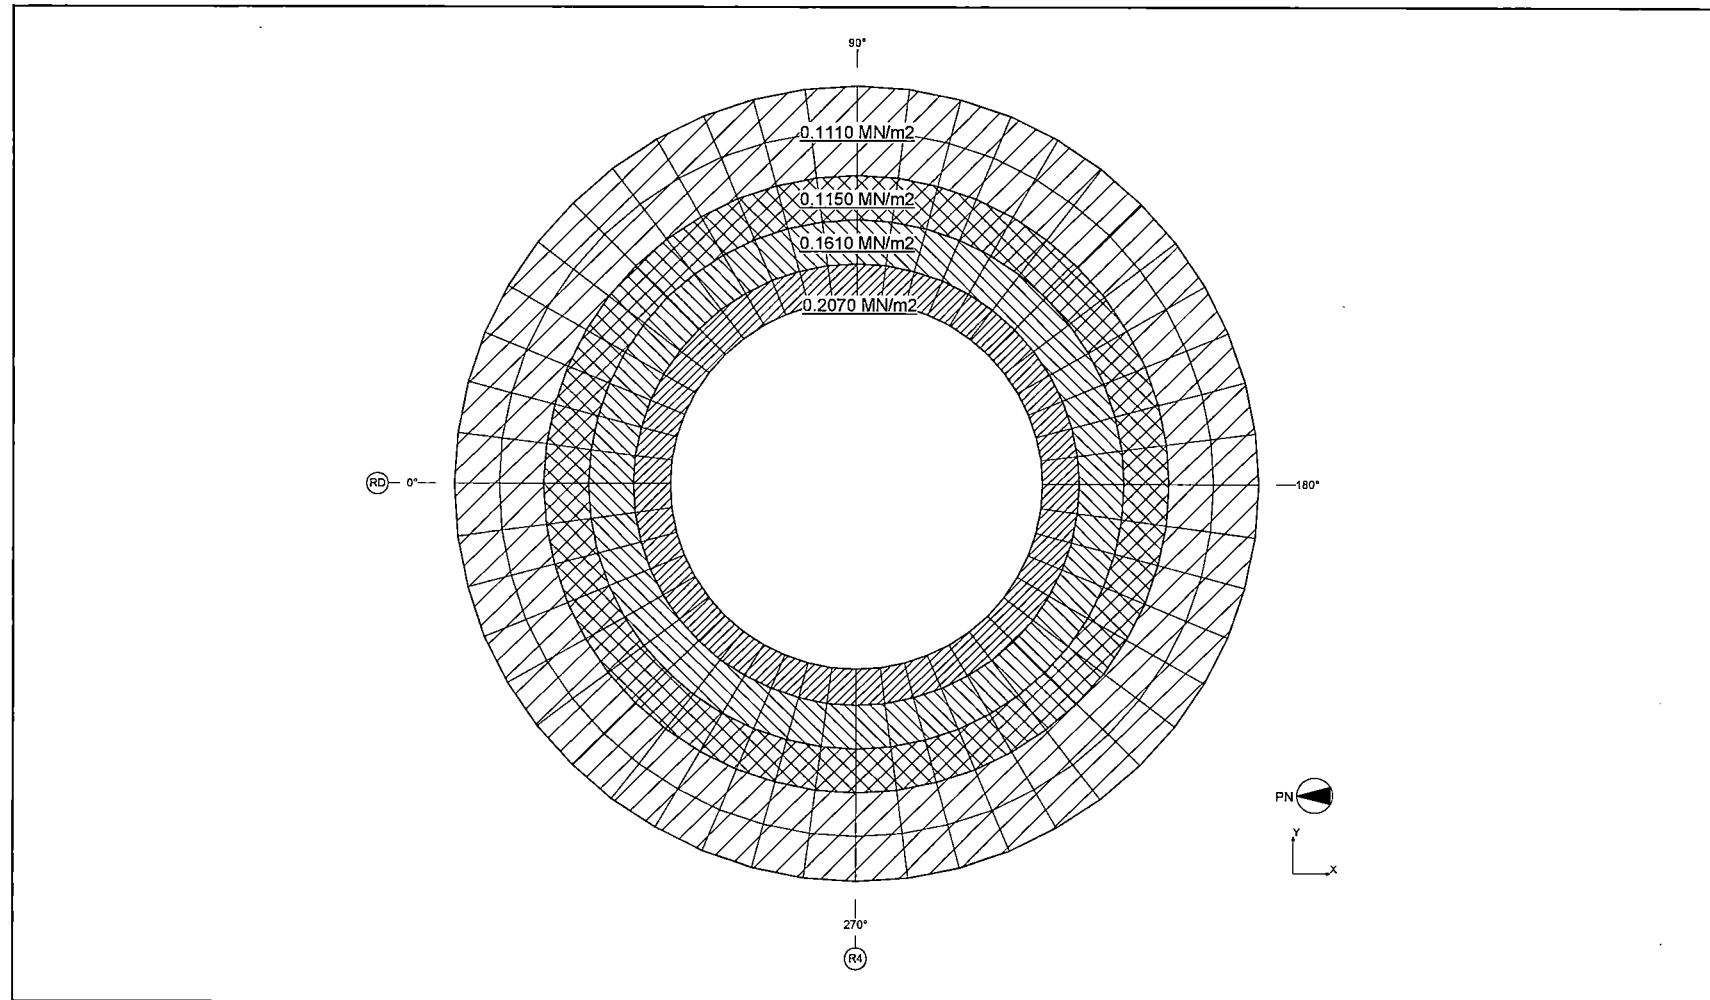


Figure 6.2.3.5-19 Application of Hydrodynamic Load on the Suppression Pool Slab Liner (PS: Pressure Concurrent with Froth Impact Loads)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 423

REV. 2

of 543



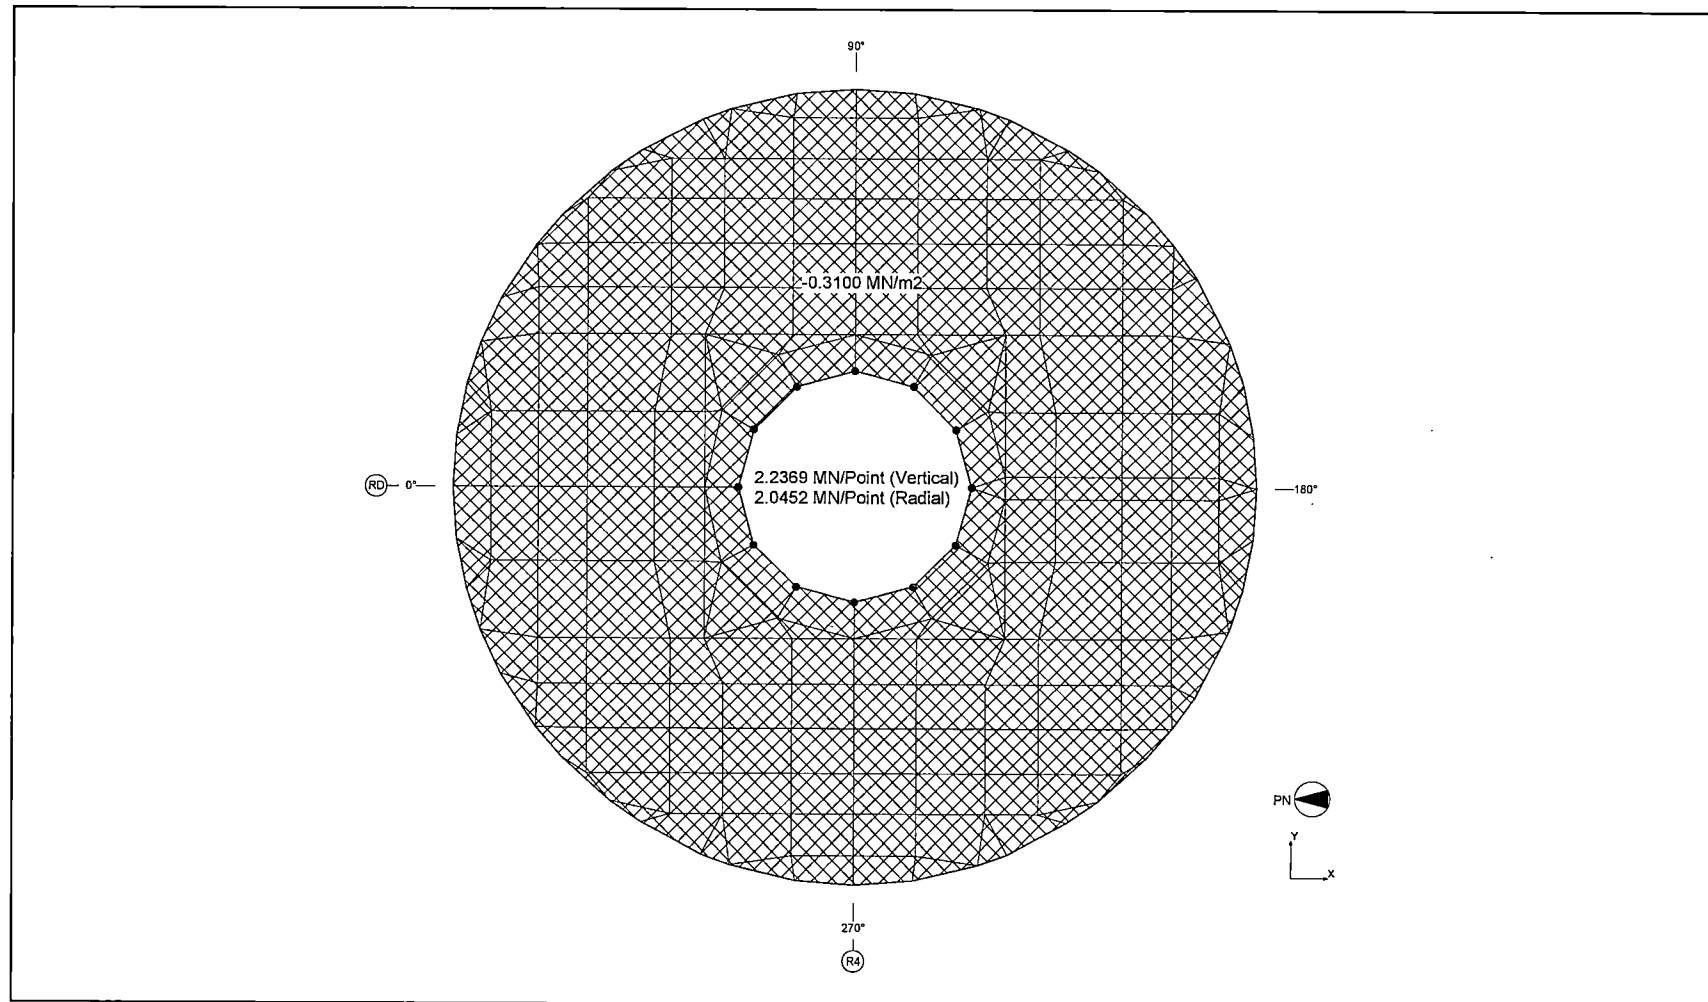



Figure 6.2.3.5-20 Application of Hydrodynamic Load on the Top Slab Liner (PS: Pressure Concurrent with Froth Impact Loads)

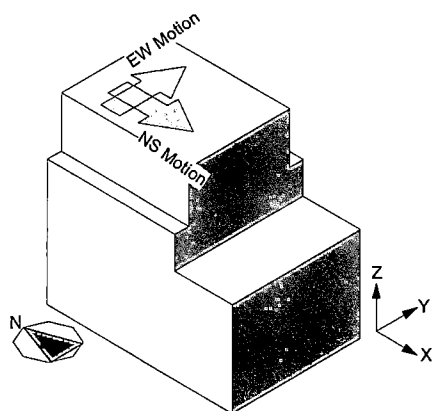

Horizontal Seismic Load

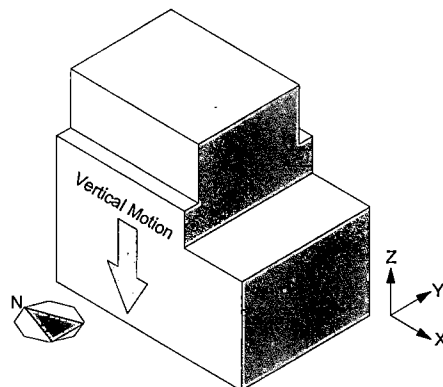

Vertical Seismic Load

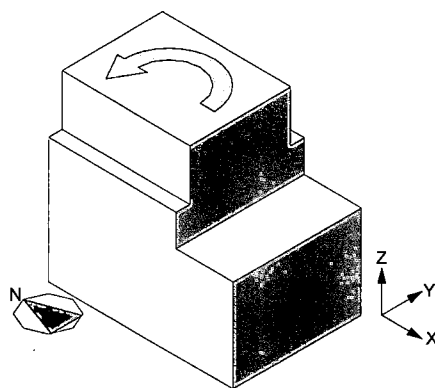

Torsional Seismic Load

Figure 6.2.3.9-1 Seismic Load Directions in the Stress Analysis

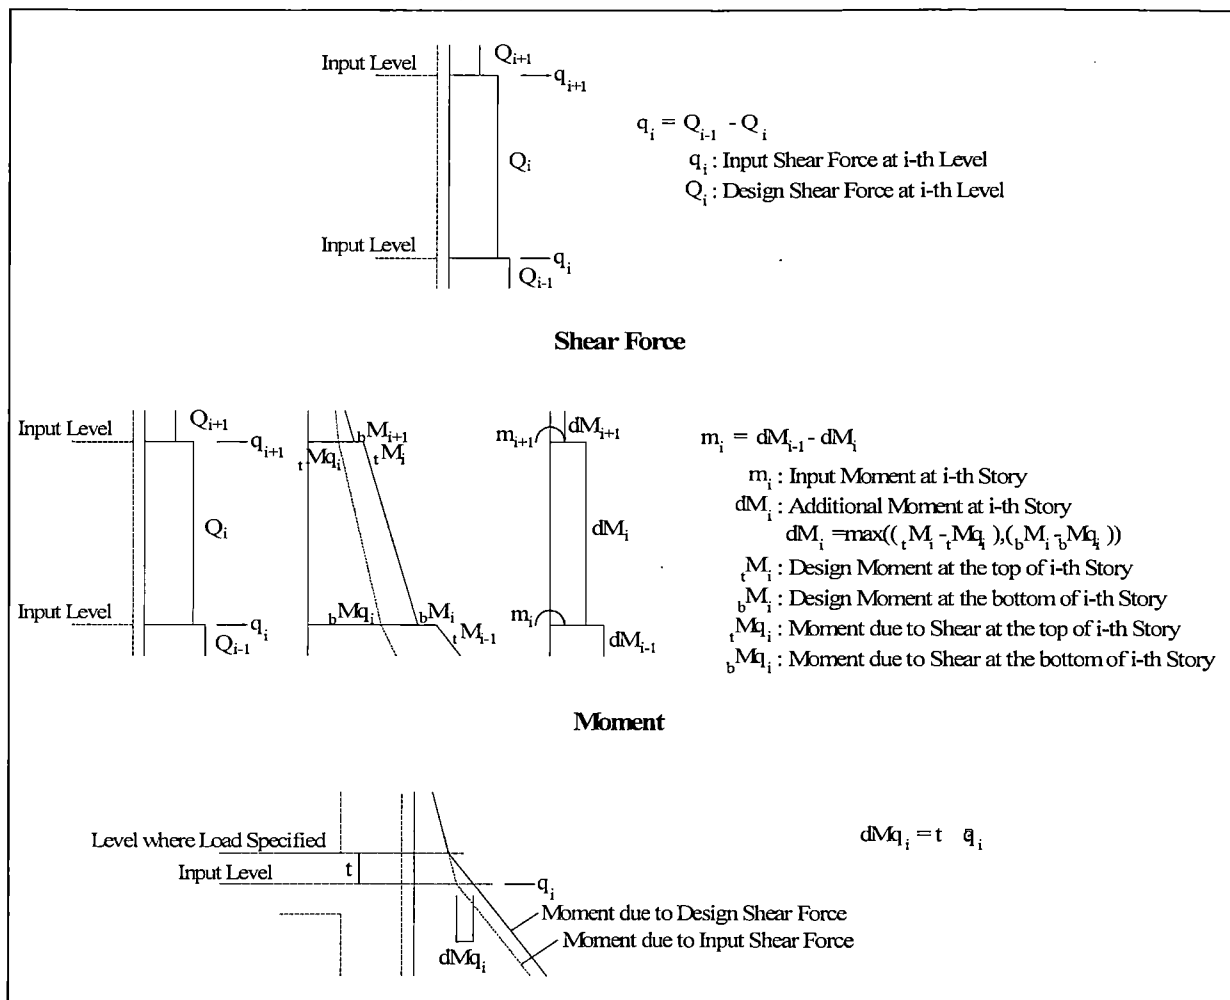


Figure 6.2.3.9-2 Calculation of Applied Shear Forces and Moments



HITACHI

WG3-U71-ERD-S-0004

SH NO. 426

REV. 2

of 543

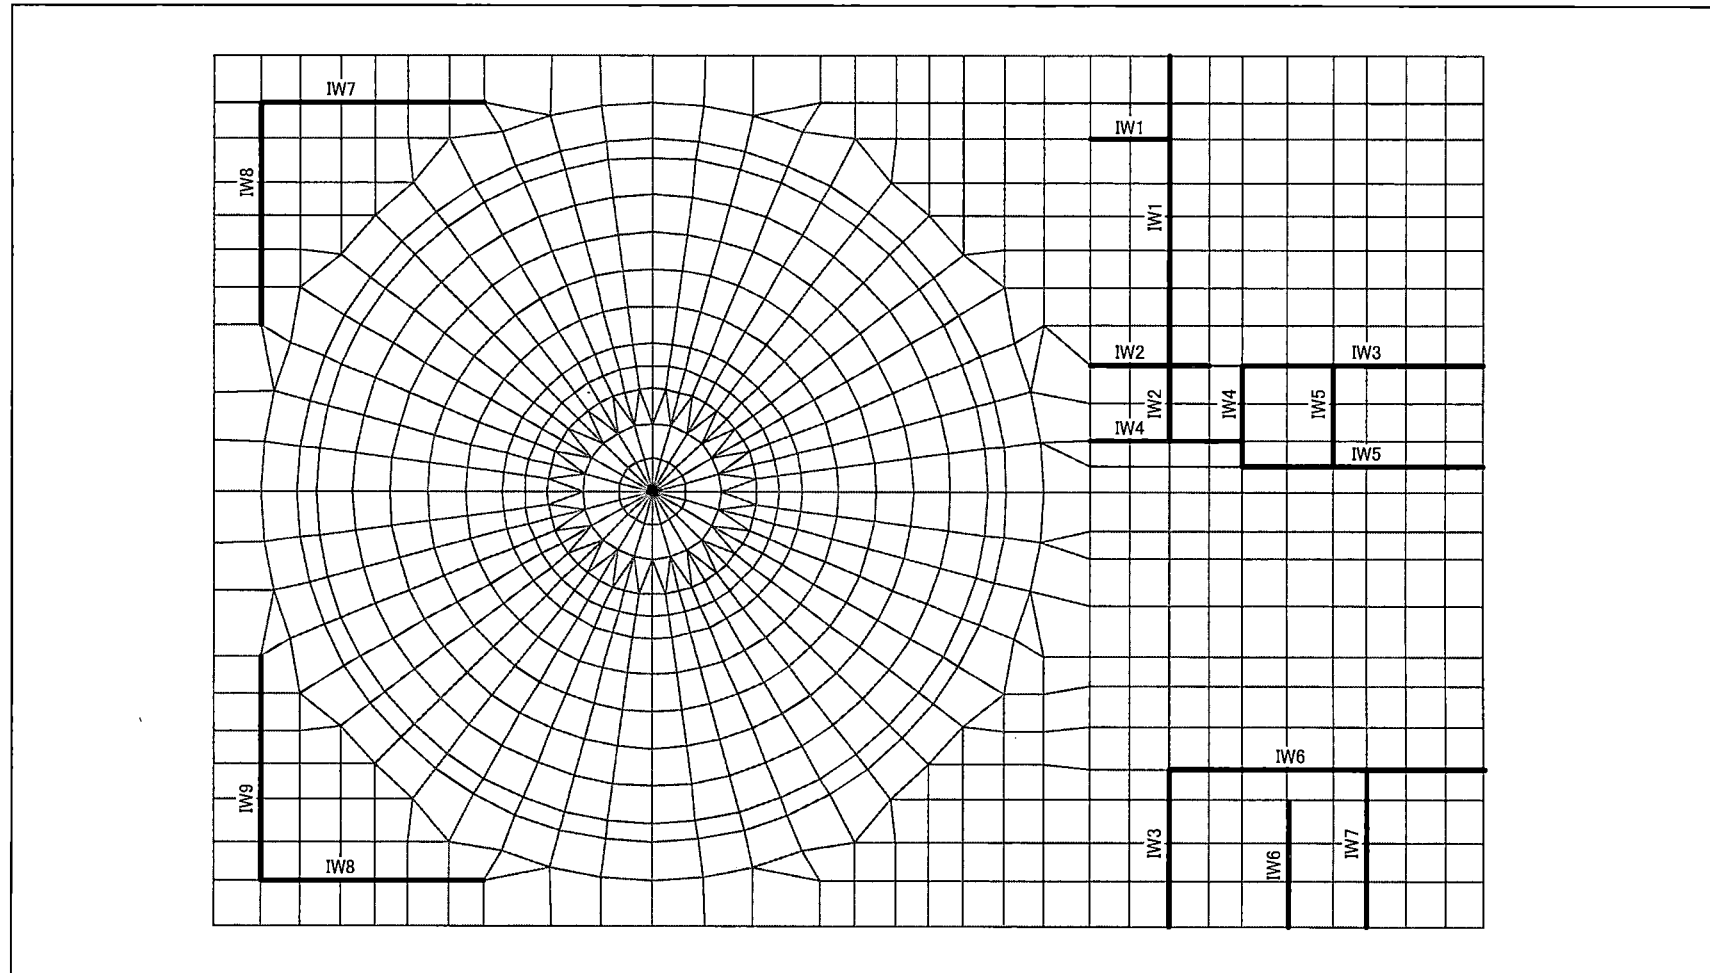


Figure 6.2.3.9-3 Inner Walls Where Shear Force Are Applied - EL -11,500~EL-6,400



HITACHI

WG3-U71-ERD-S-0004 SH NO. 427
REV. 2 of 543

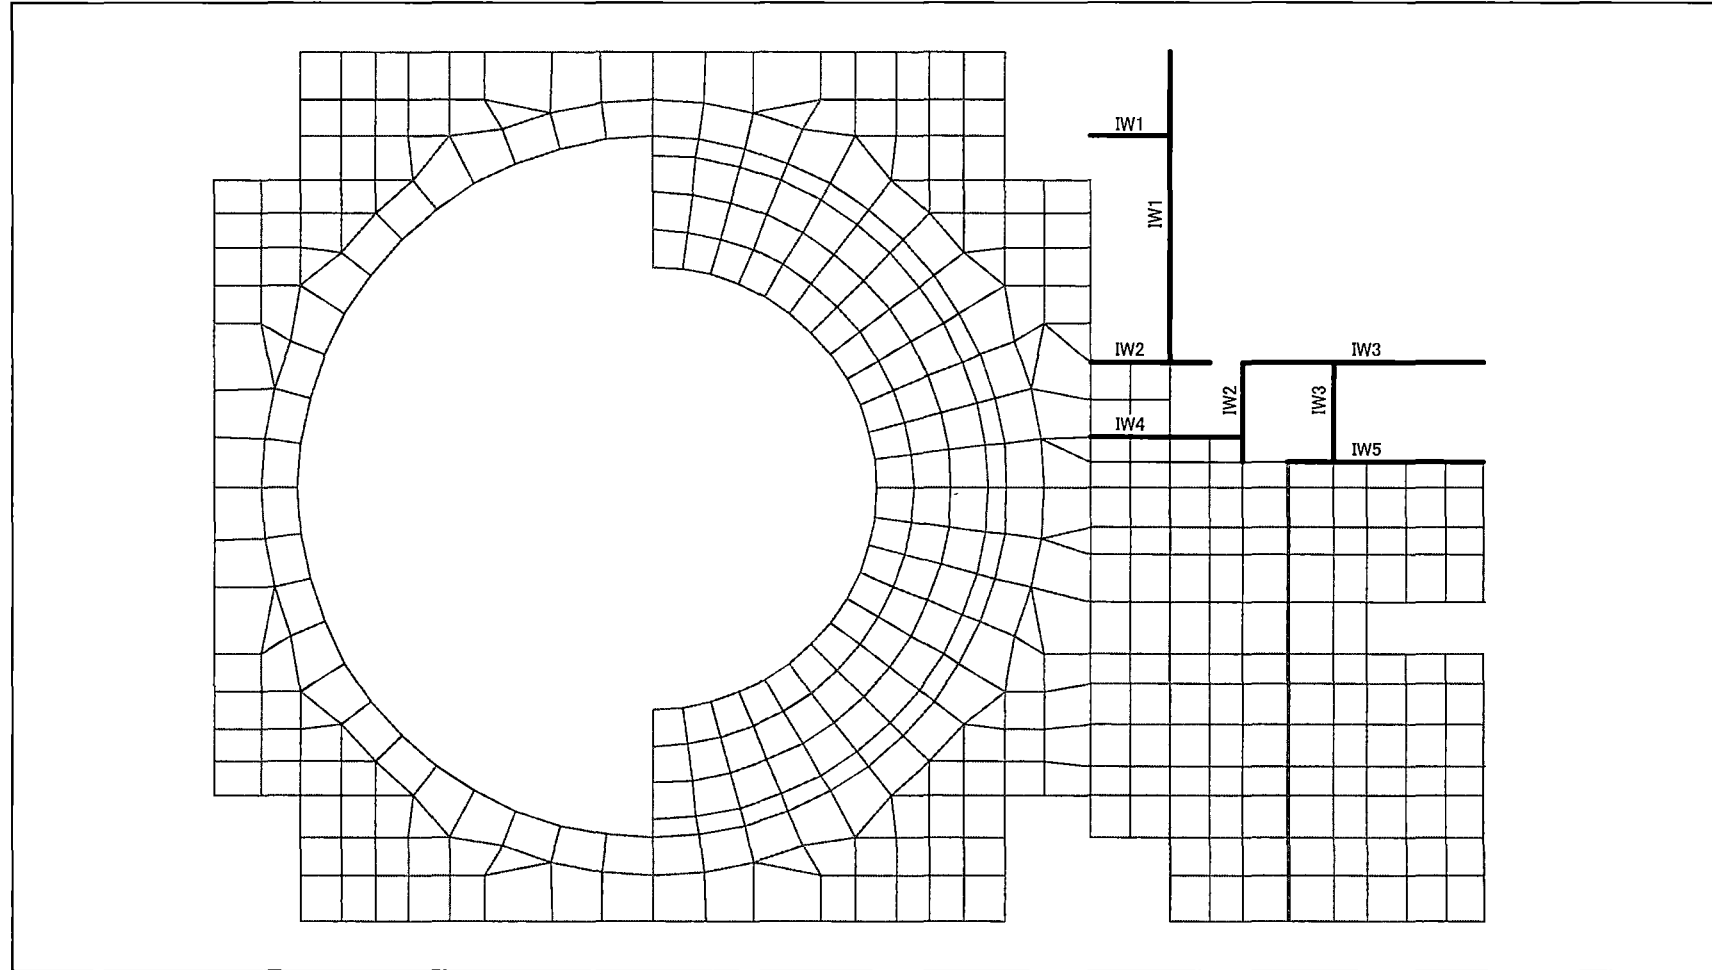


Figure 6.2.3.9-4 Inner Walls Where Shear Force Are Applied - EL-6,400~EL-1,000



HITACHI

WG3-U71-ERD-S-0004

SH NO. 428

REV. 2

of 543


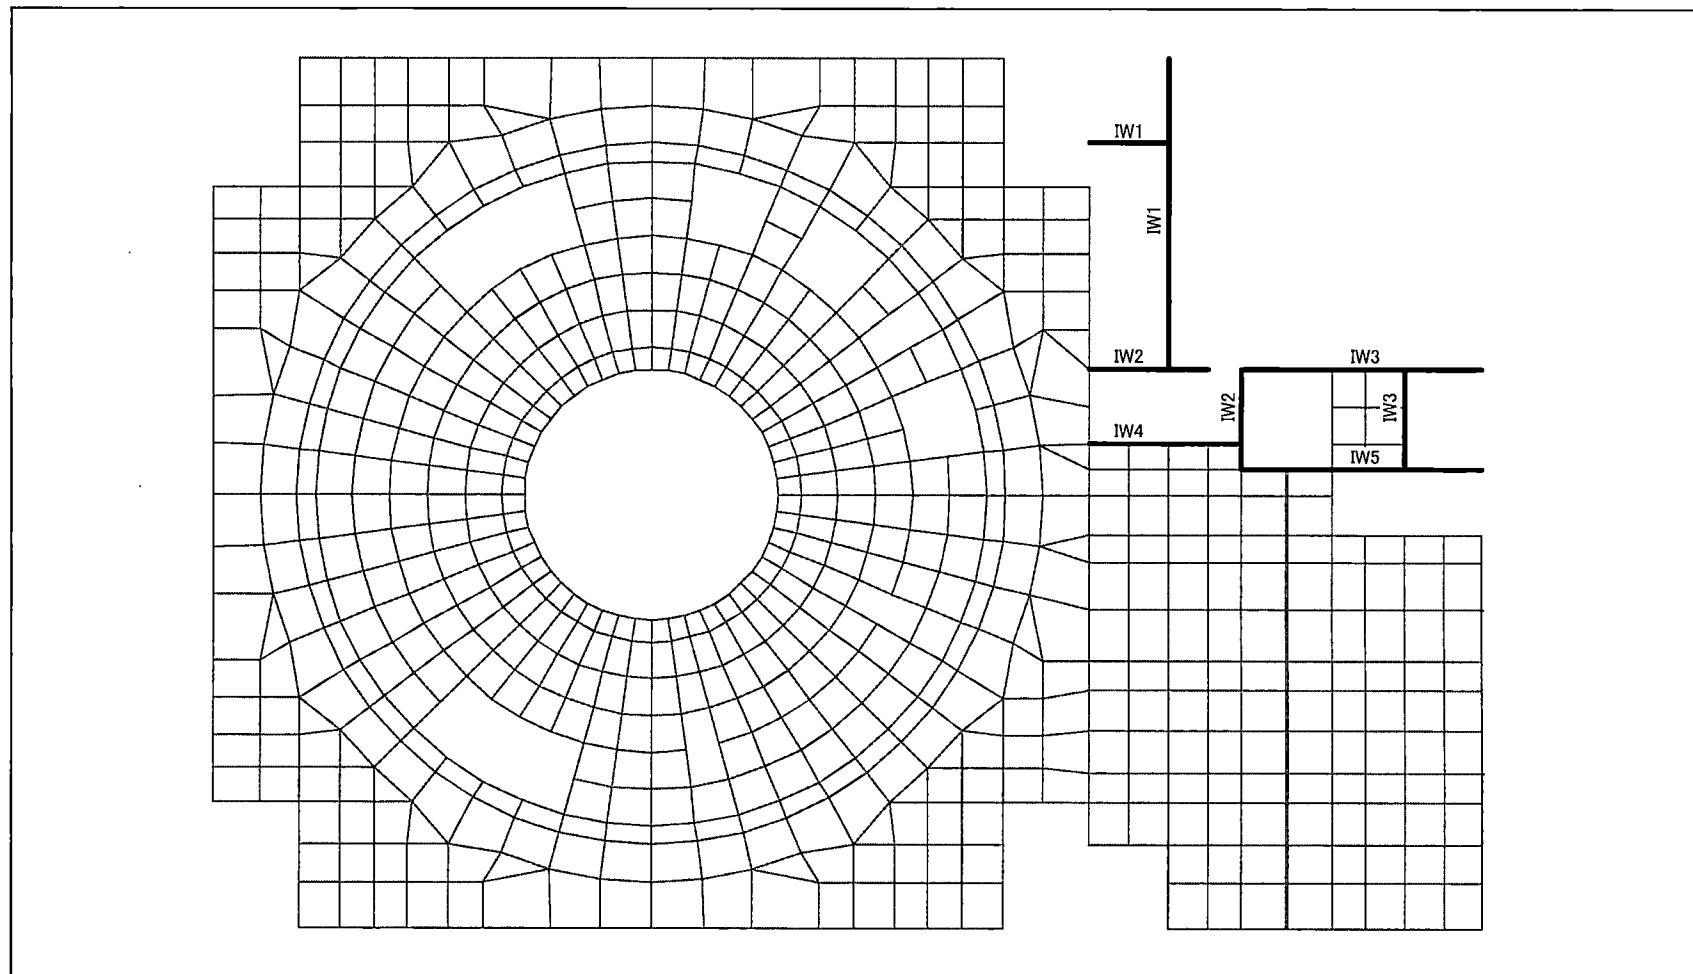


Figure 6.2.3.9-5 Inner Walls Where Shear Force Are Applied - EL-1,000~EL4,650

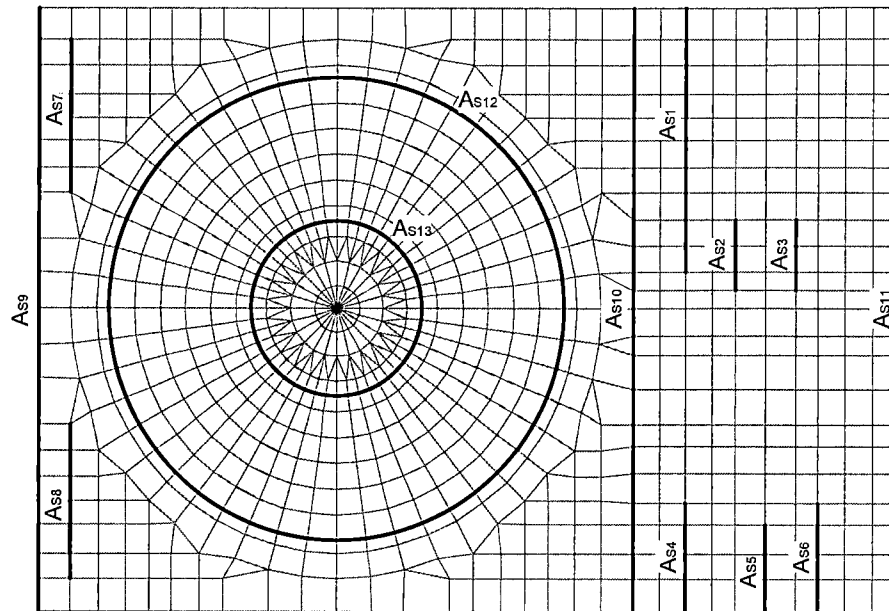

$$Q = Q_{RFB} + Q_{RCCV} + Q_{PED}$$

$$A_s = \sum_{i=1}^n A_{Si}$$


$$Q_{unit} = \frac{Q}{A_s}$$

$${}_i q_{seismic} = A_{Si} \cdot Q_{unit} \quad (i = 1, n)$$

where, Q : Design Shear Force

A_{Si} : Shear Area of Each Seismic Wall

${}_i q_{seismic}$: Shear Force Applied to Each Seismic Wall

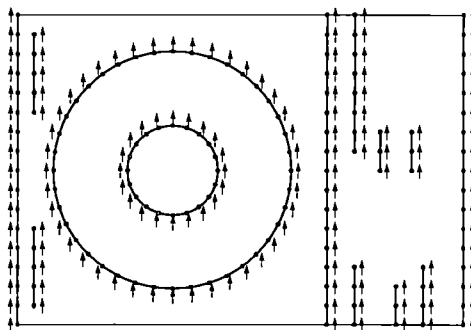

$${}_i q_j = {}_i q_{seismic} \times \frac{W_j}{\sum_{j=1}^m W_j} \quad i = 1, n$$

j : i -th Wall Grid Point

${}_i q_j$: Shear Force Applied to Each Grid Point

W_j : Weight of Each Grid Point

Figure 6.2.3.9-6 Distribution of Seismic Shear Forces

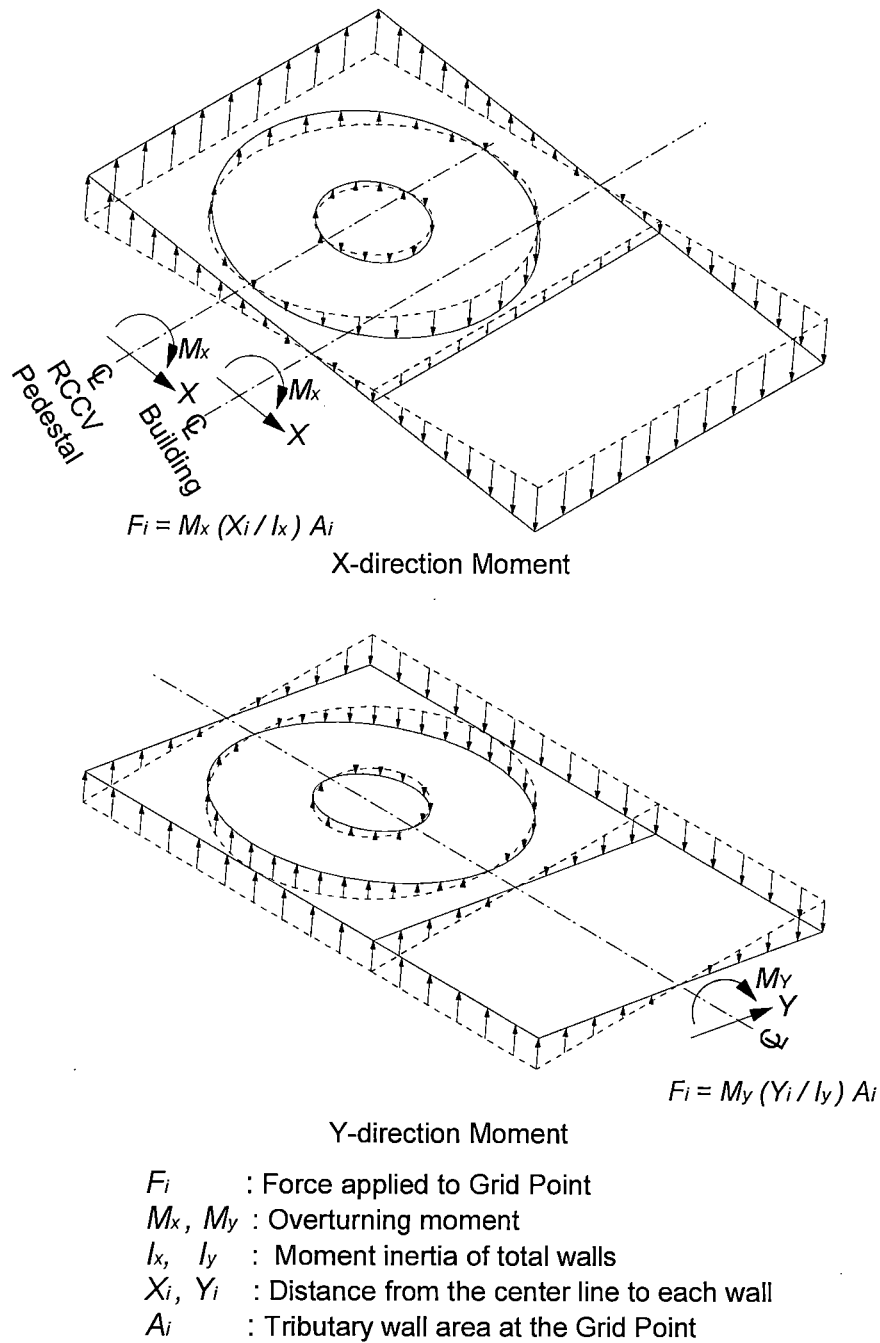


Figure 6.2.3.9-7 Method of Applying Overturning Moments



HITACHI

WG3-U71-ERD-S-0004

SH NO. 431

REV. 2

of 543

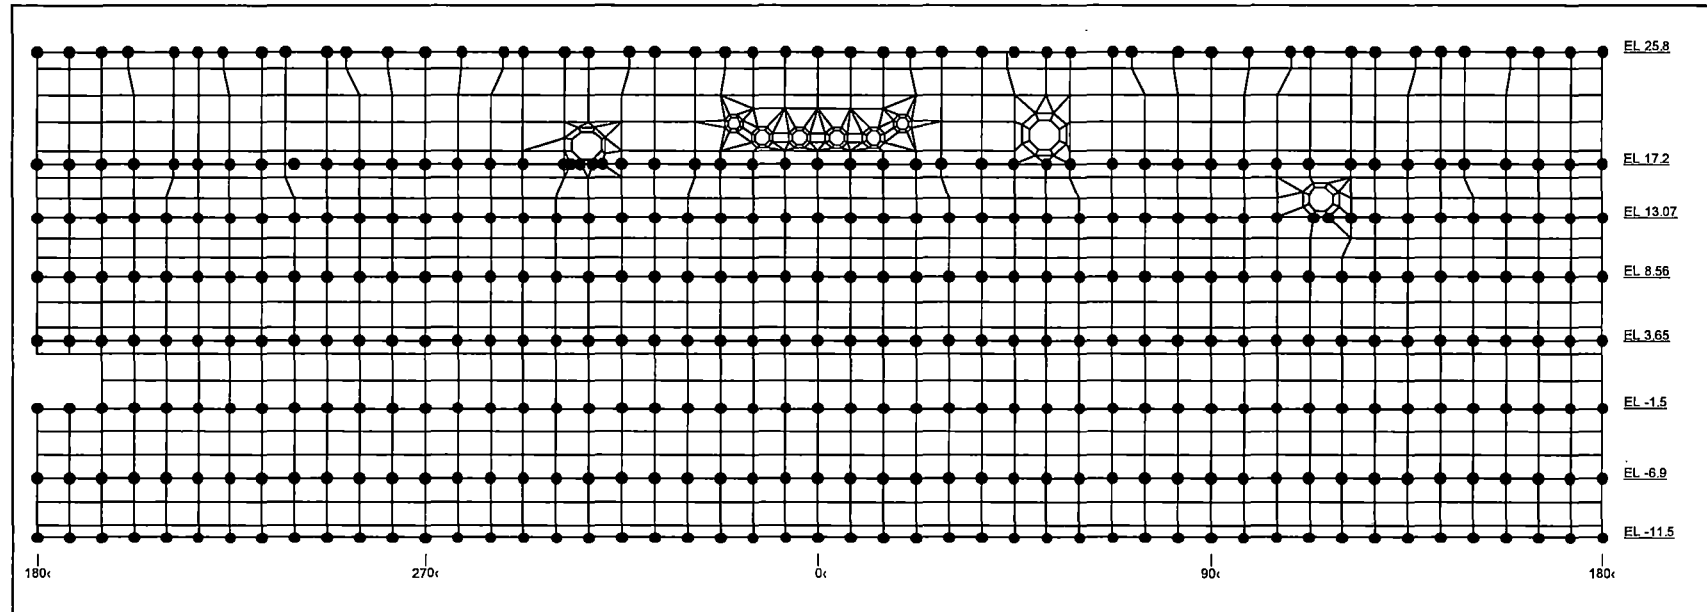


Figure 6.2.3.9-8 Application of Overturning Moments to the RCCV and Wall below RCCV



HITACHI

WG3-U71-ERD-S-0004

SH NO. 432

REV. 2

of 543

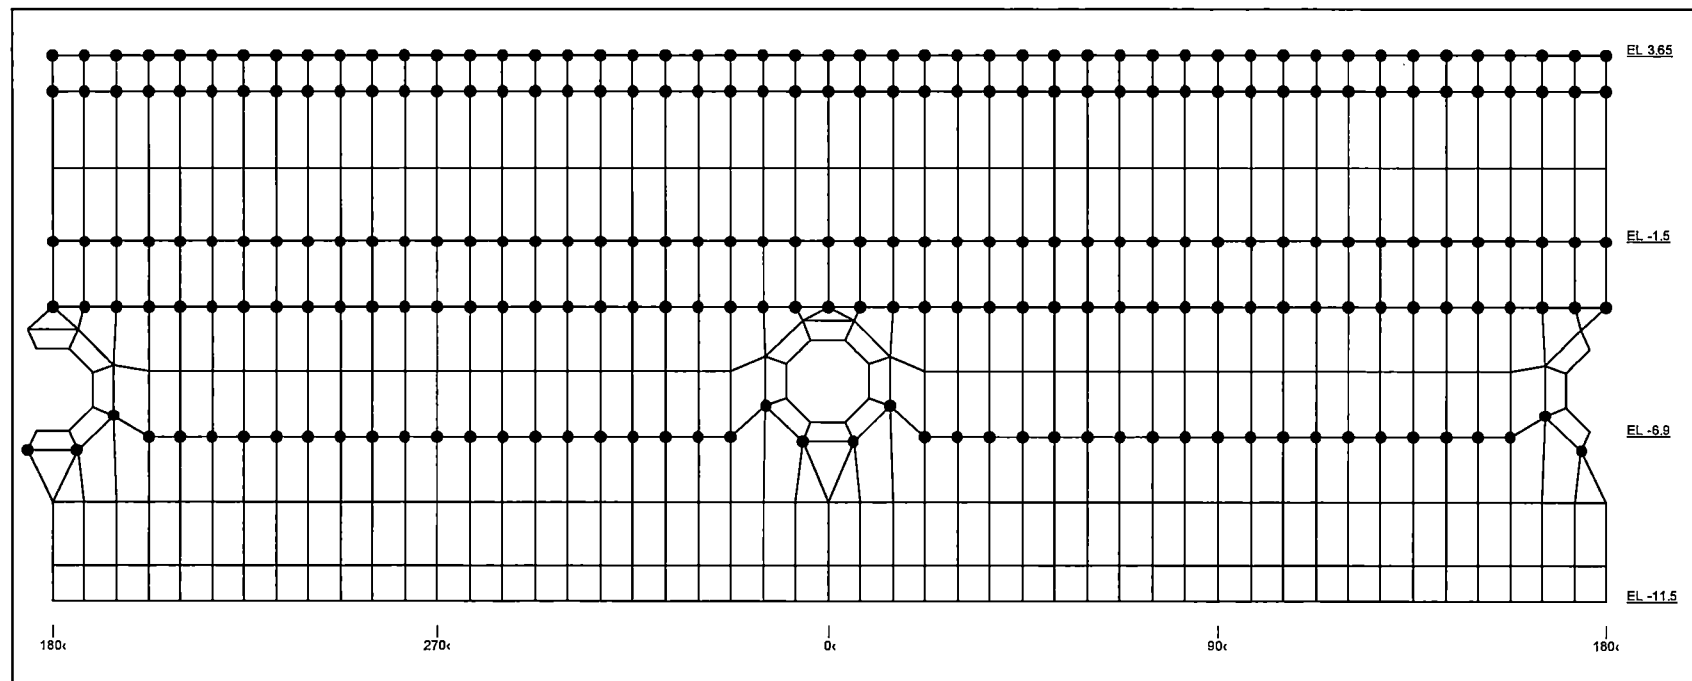


Figure 6.2.3.9-9 Application of Overturning Moments to the RPV Pedestal



HITACHI

WG3-U71-ERD-S-0004

SH NO. 435

REV. 2

of 543

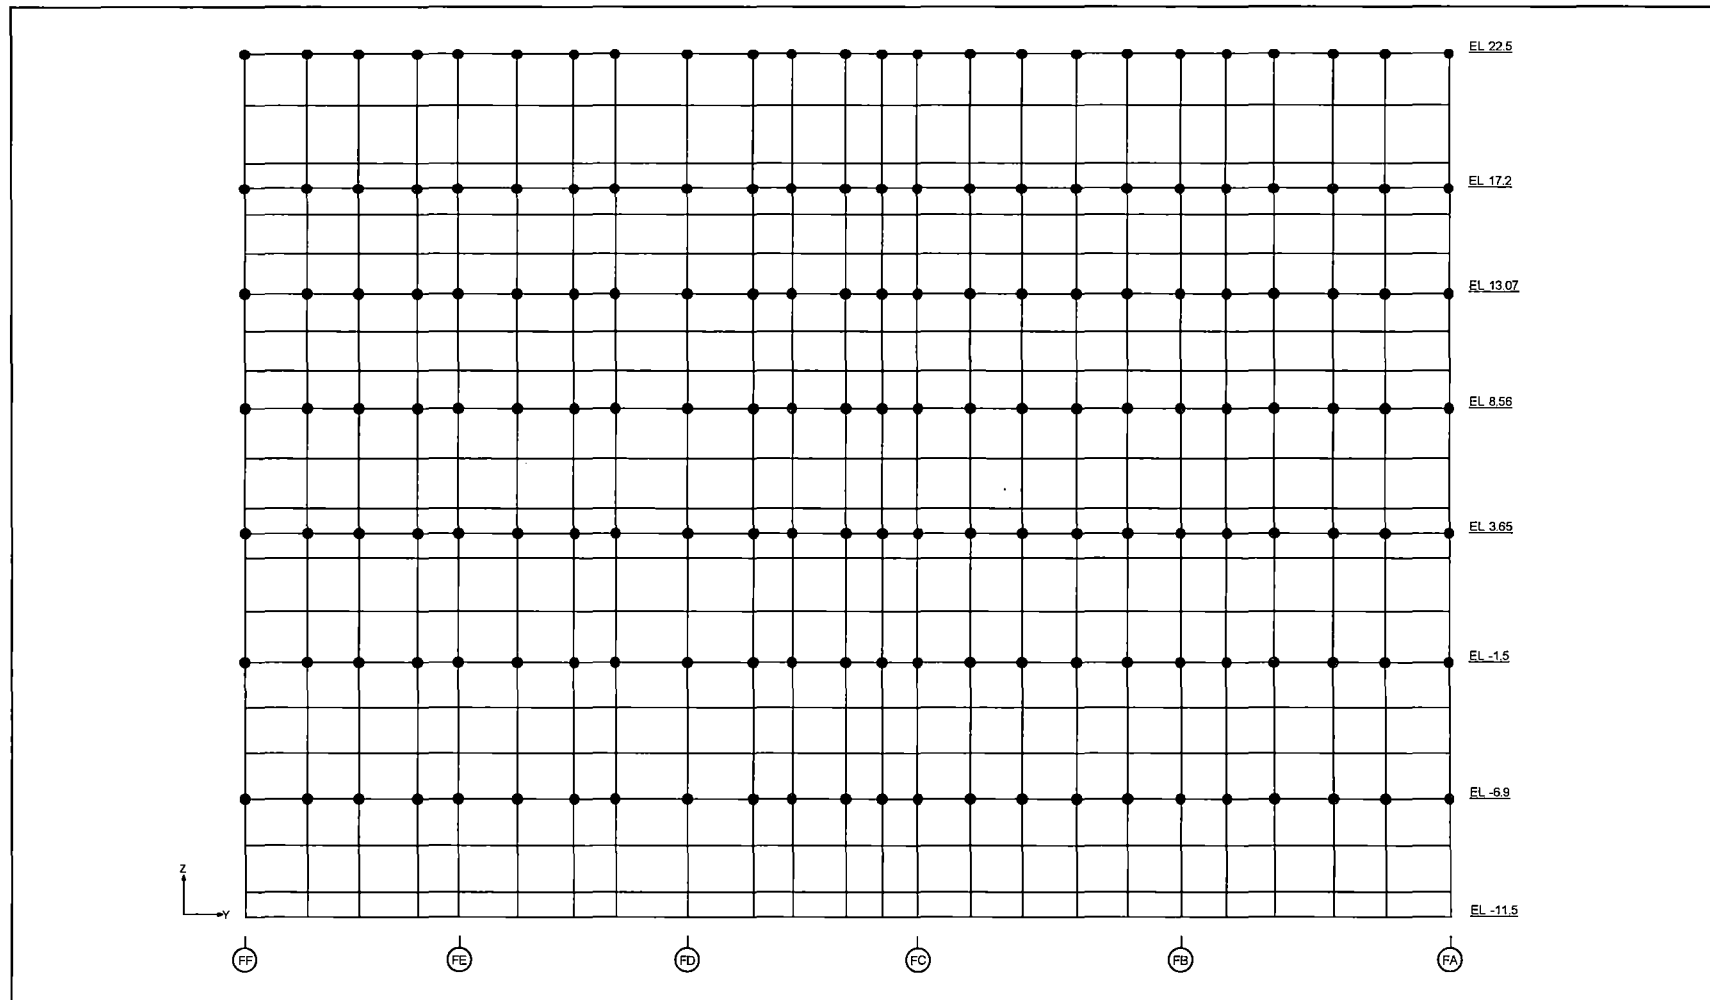


Figure 6.2.3.9-12 Application of Overturning Moments to the External Wall on F3 Column Line



HITACHI

WG3-U71-ERD-S-0004

SH NO. 436

REV. 2

of 543

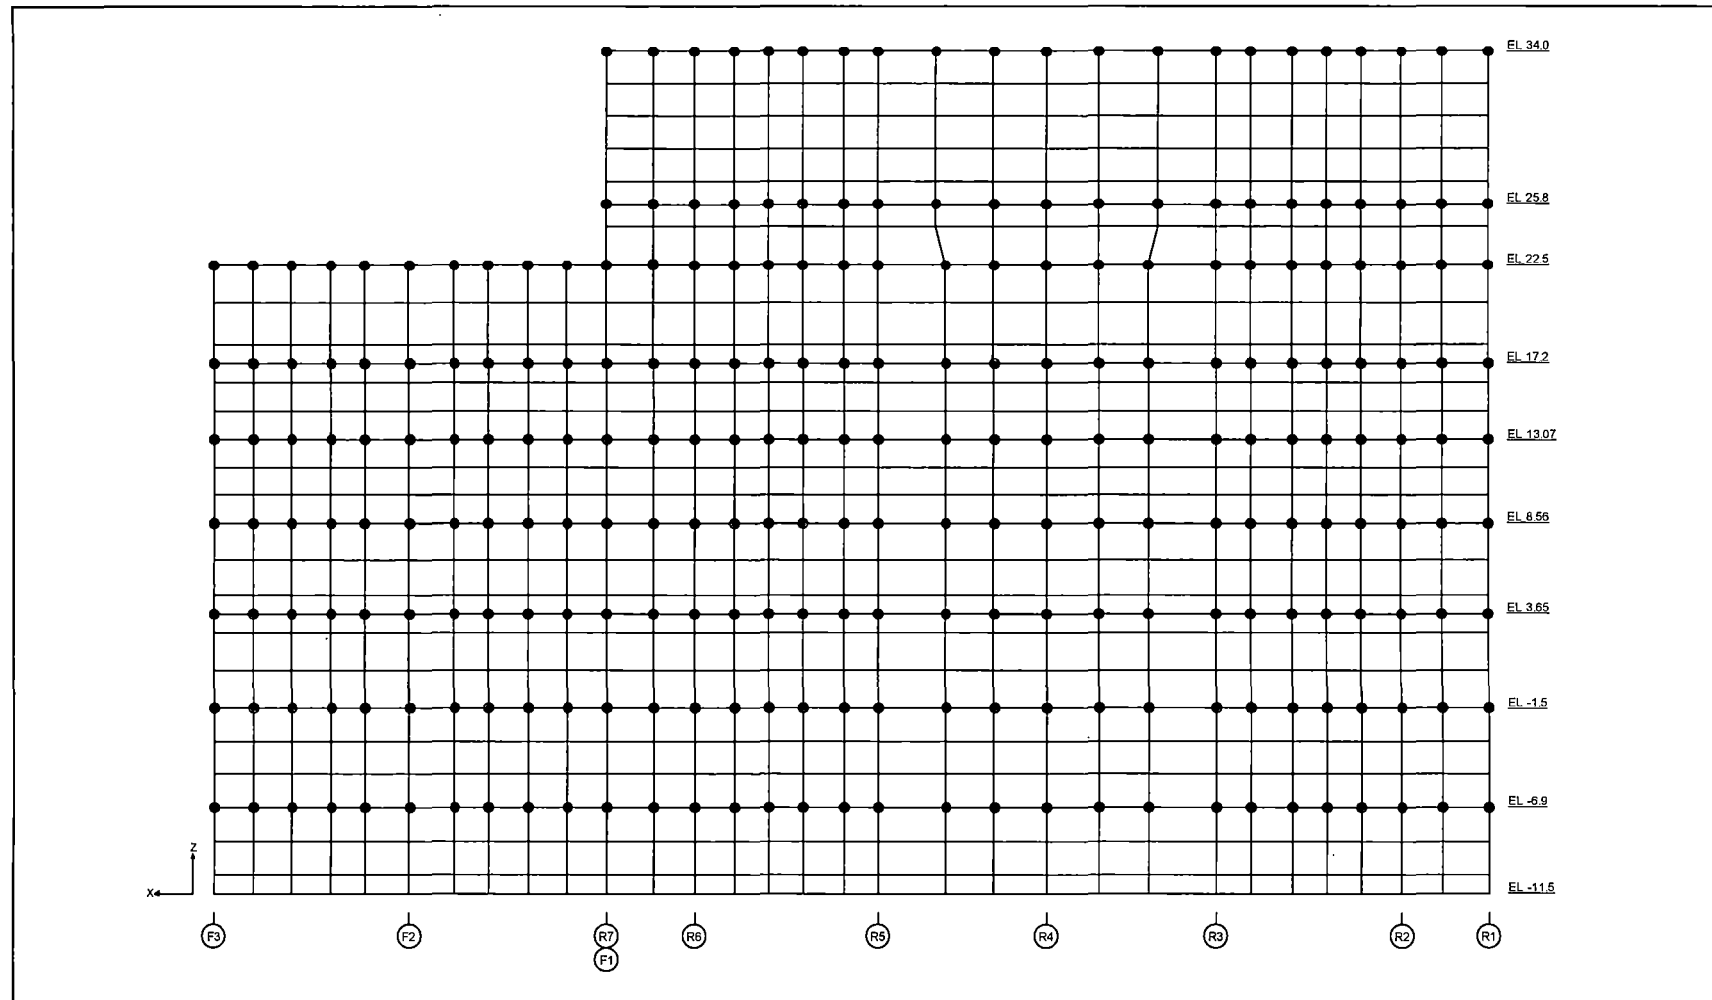


Figure 6.2.3.9-13 Application of Overturning Moments to the External Wall on RA Column Line



HITACHI

WG3-U71-ERD-S-0004

SH NO. 437

REV. 2

of 543

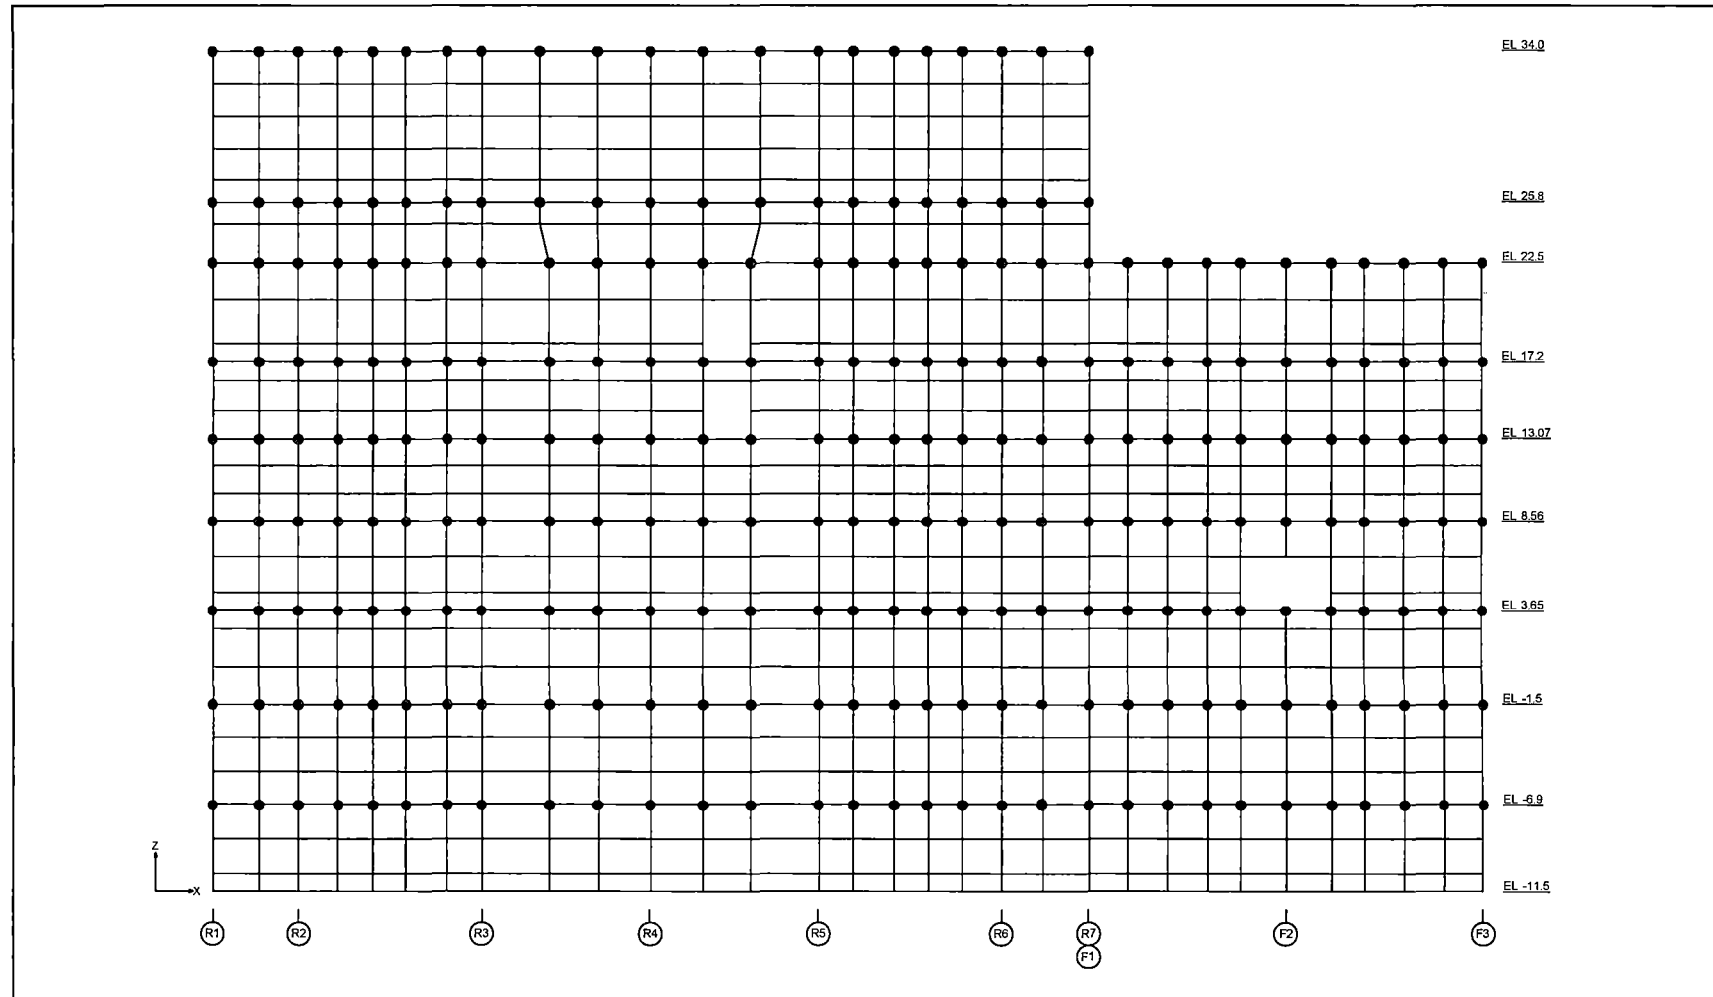


Figure 6.2.3.9-14 Application of Overturning Moments to the External Wall on RG Column Line



HITACHI

WG3-U71-ERD-S-0004 SH NO. 438
REV. 2 of 543

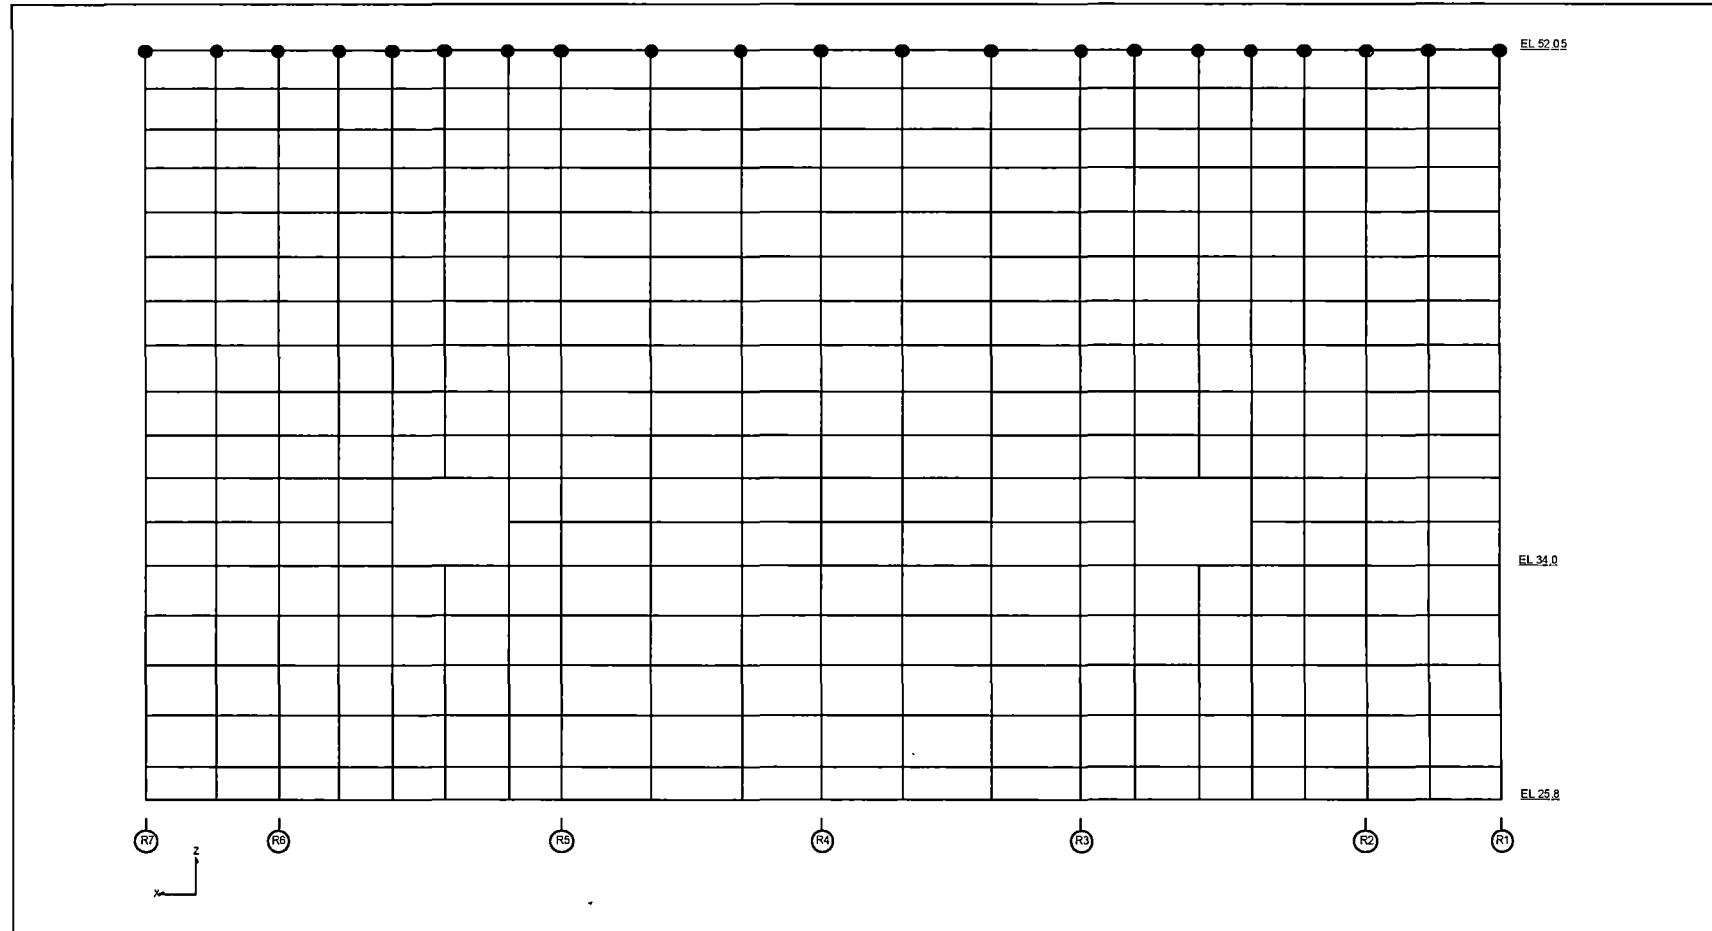


Figure 6.2.3.9-15 Application of Overturning Moments to the External Wall on RB Column Line



HITACHI

WG3-U71-ERD-S-0004

SH NO. 439

REV. 2

of 543

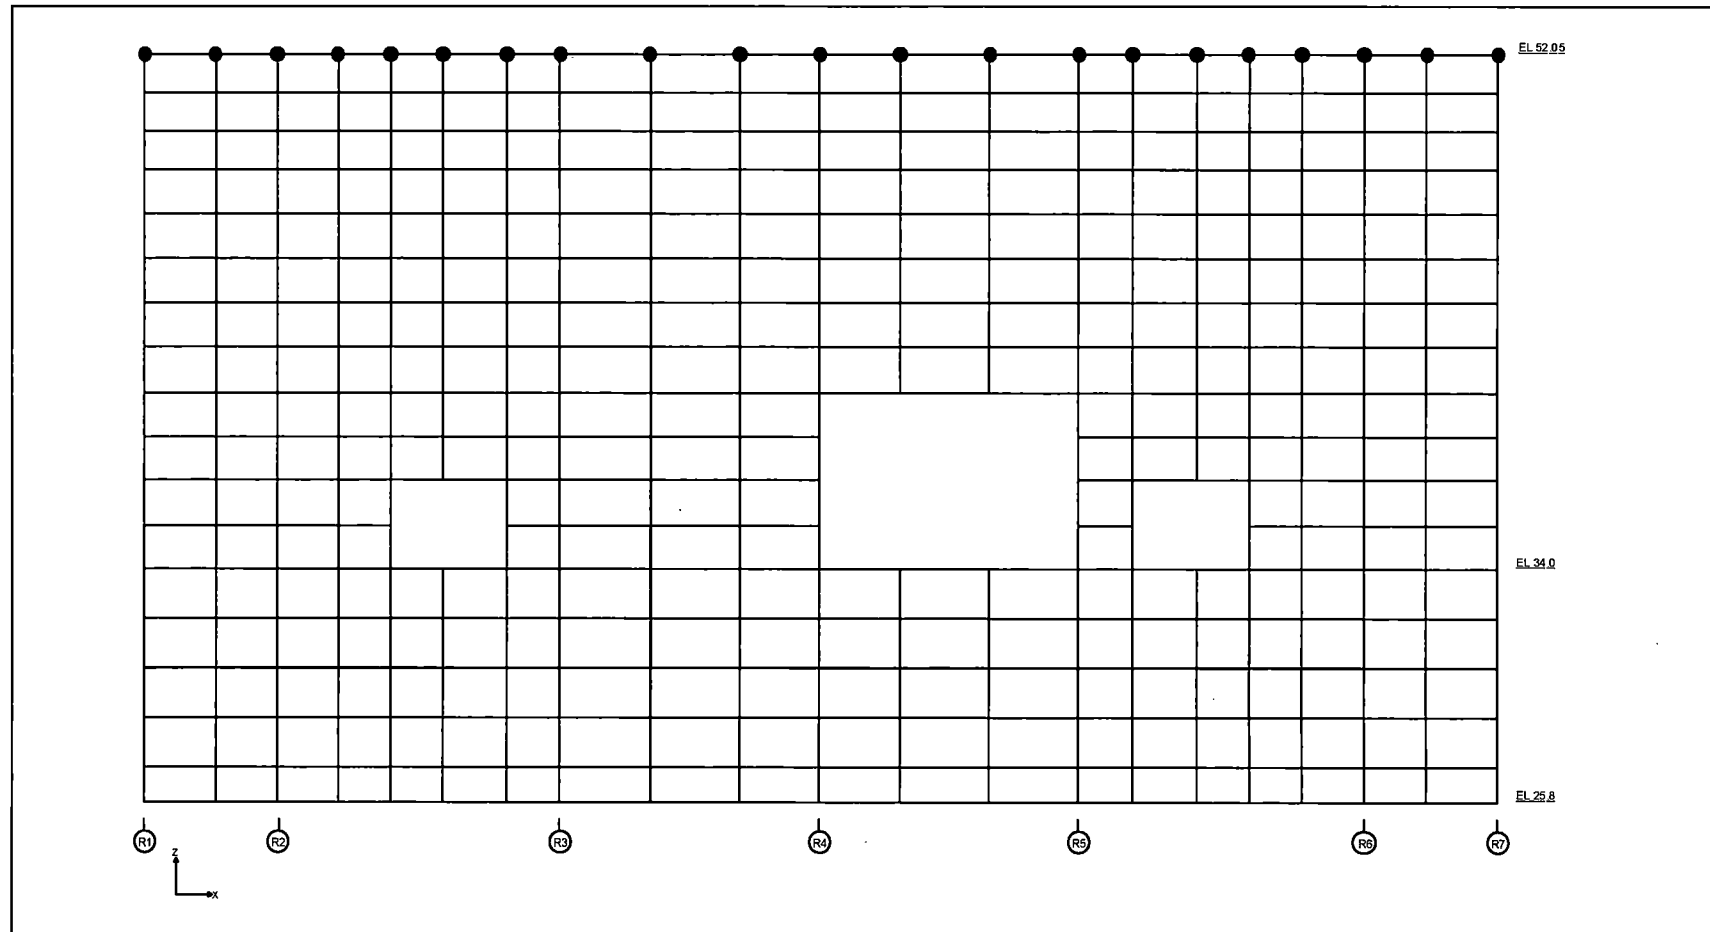


Figure 6.2.3.9-16 Application of Overturning Moments to the External Wall on RF Column Line



HITACHI

WG3-U71-ERD-S-0004 SH NO. 440
REV. 2 of 543



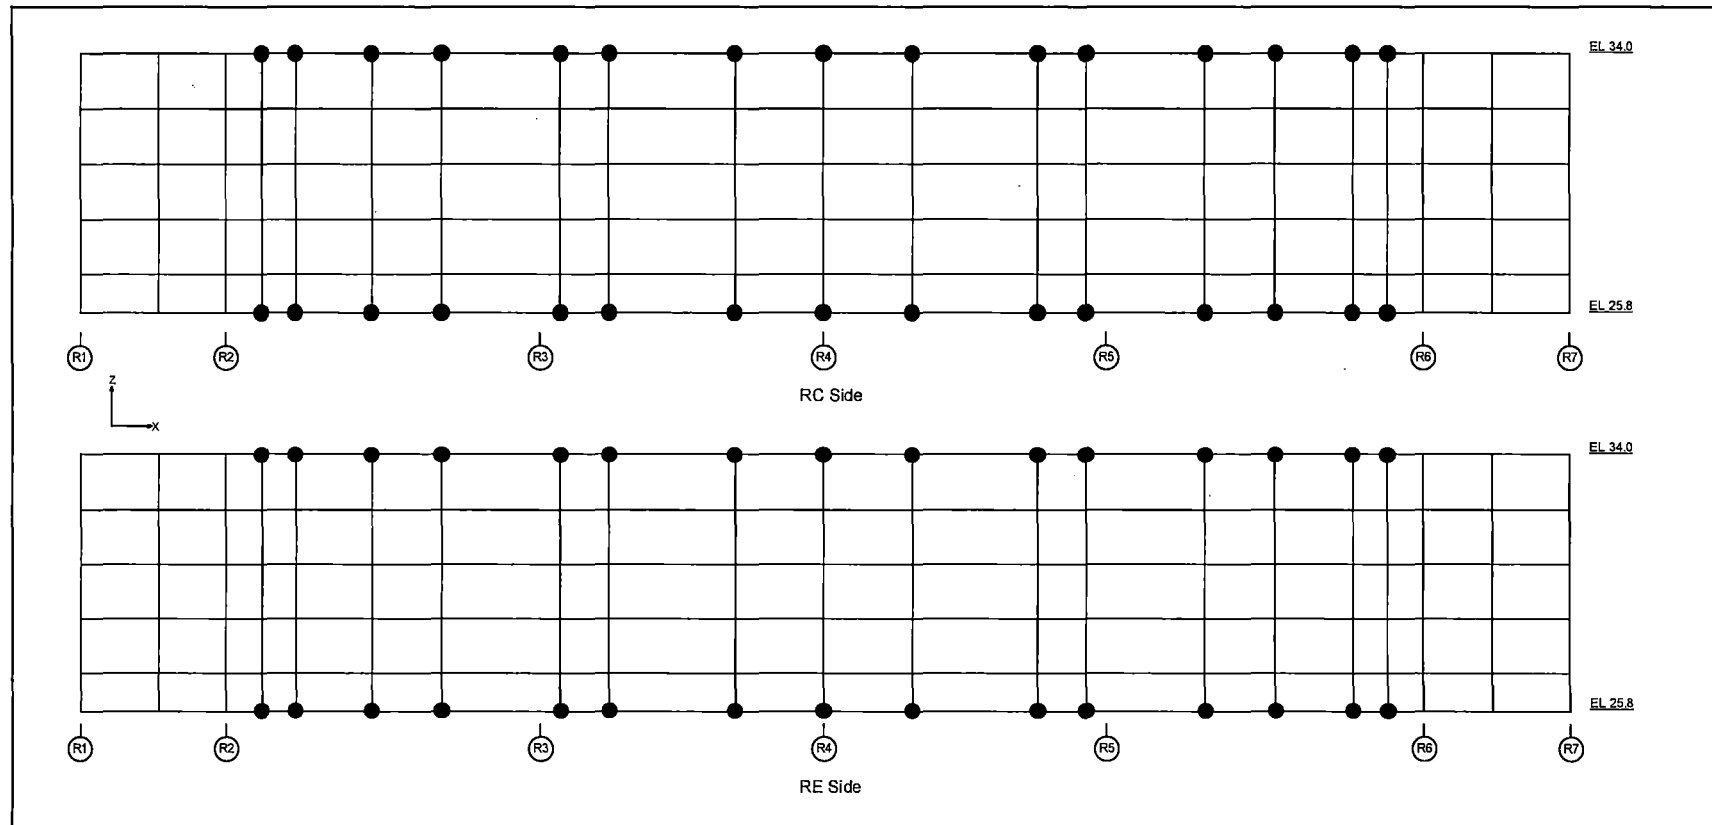


Figure 6.2.3.9-17 Application of Overturning Moments to the Pool Girders

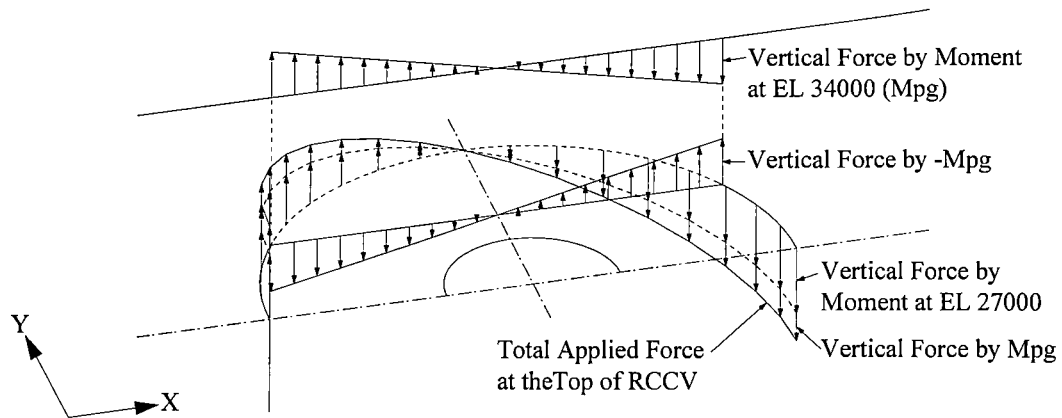

X-direction Moment

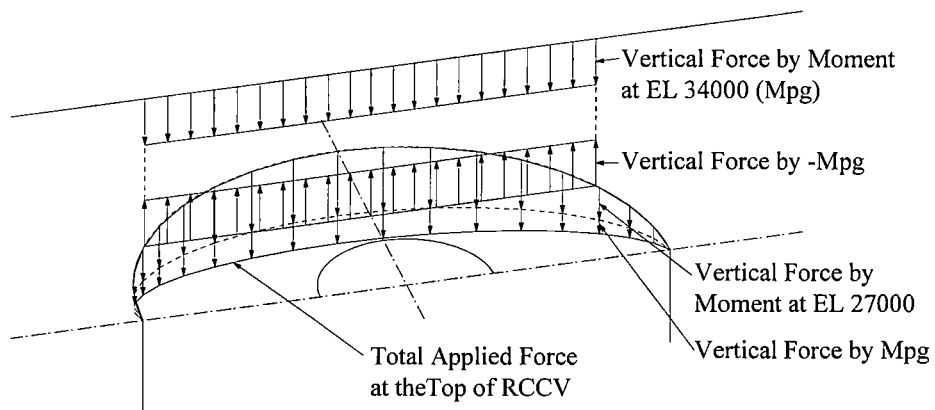

Y-direction Moment

Note: Above figures show the East side half of RCCV

Figure 6.2.3.9-18 Method of Applying Overturning Moments to the Top of RCCV



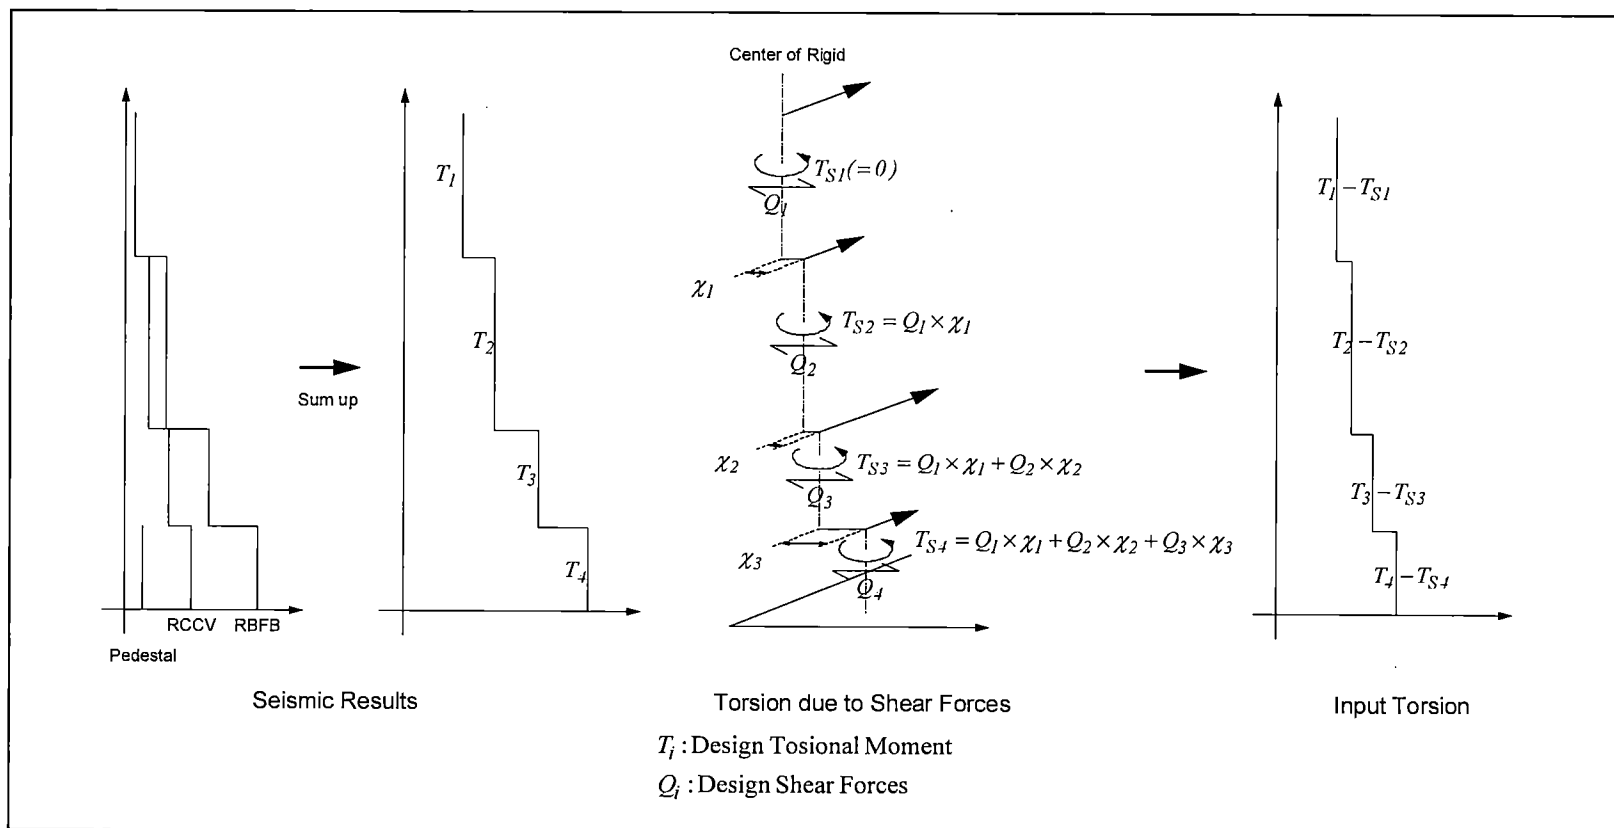


Figure 6.2.3.9-19 Calculation Method of Input Torsional Moment

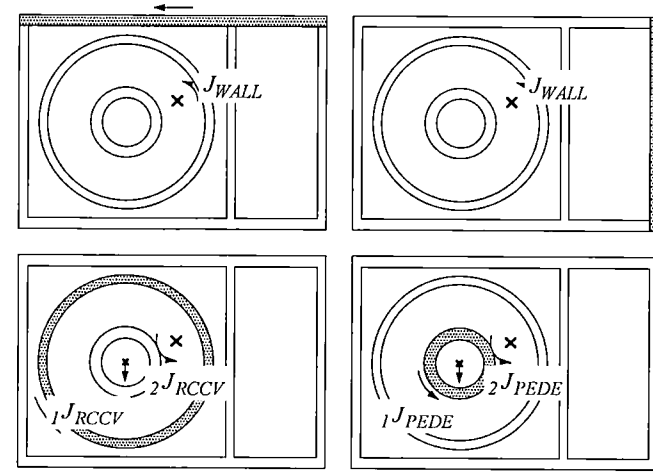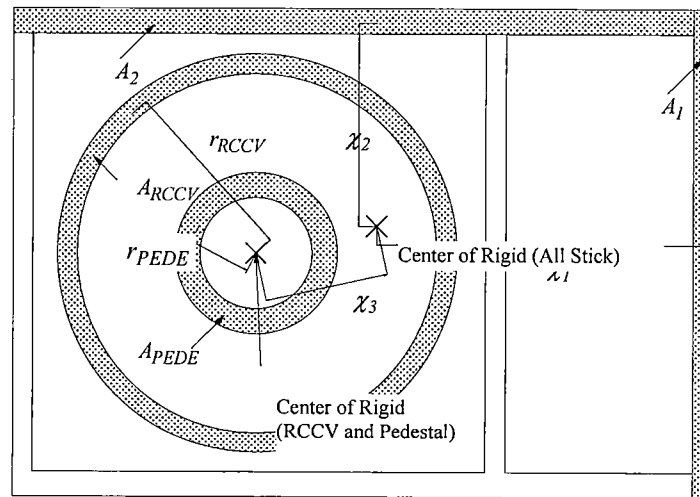

$$J_{WALL} = \sum_{j=1}^m (A_j \times \chi_j^2)$$

$$1J_{RCCV} = A_{RCCV} \times r_{RCCV}^2$$

$$2J_{RCCV} = \frac{A_{RCCV}}{2} \times \chi_3^2$$

$$1J_{PEDE} = A_{PEDE} \times r_{PEDE}^2$$

$$2J_{PEDE} = \frac{A_{PEDE}}{2} \times \chi_3^2$$

$$J_{ALL} = J_{WALL} + 1J_{RCCV} + 2J_{RCCV} + 1J_{PEDE} + 2J_{PEDE}$$

$$jT_{input} = \frac{(T_i - T_{Si})}{J_{ALL}} \times jJ_{WALL} \quad (j = 1, m)$$

$$RCCVT_{input} = \frac{(T_i - T_{Si})}{J_{ALL}} \times (1J_{RCCV} + 2J_{RCCV})$$

$$PEDE T_{input} = \frac{(T_i - T_{Si})}{J_{ALL}} \times (1J_{PEDE} + 2J_{PEDE})$$

$(T_i - T_{Si})$: Input Torsion (Refer to Figure 6.2.3.9-19.)

Figure 6.2.3.9-20 Calculation Method of Shear Forces due to Torsional Moment



HITACHI

WG3-U71-ERD-S-0004

SH NO. 444

REV. 2

of 543




Figure 6.2.3.9-21 Soil Pressure Due to N-S Direction Earthquake on the Basemat

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004

SH NO. 445

REV. 2

of 543

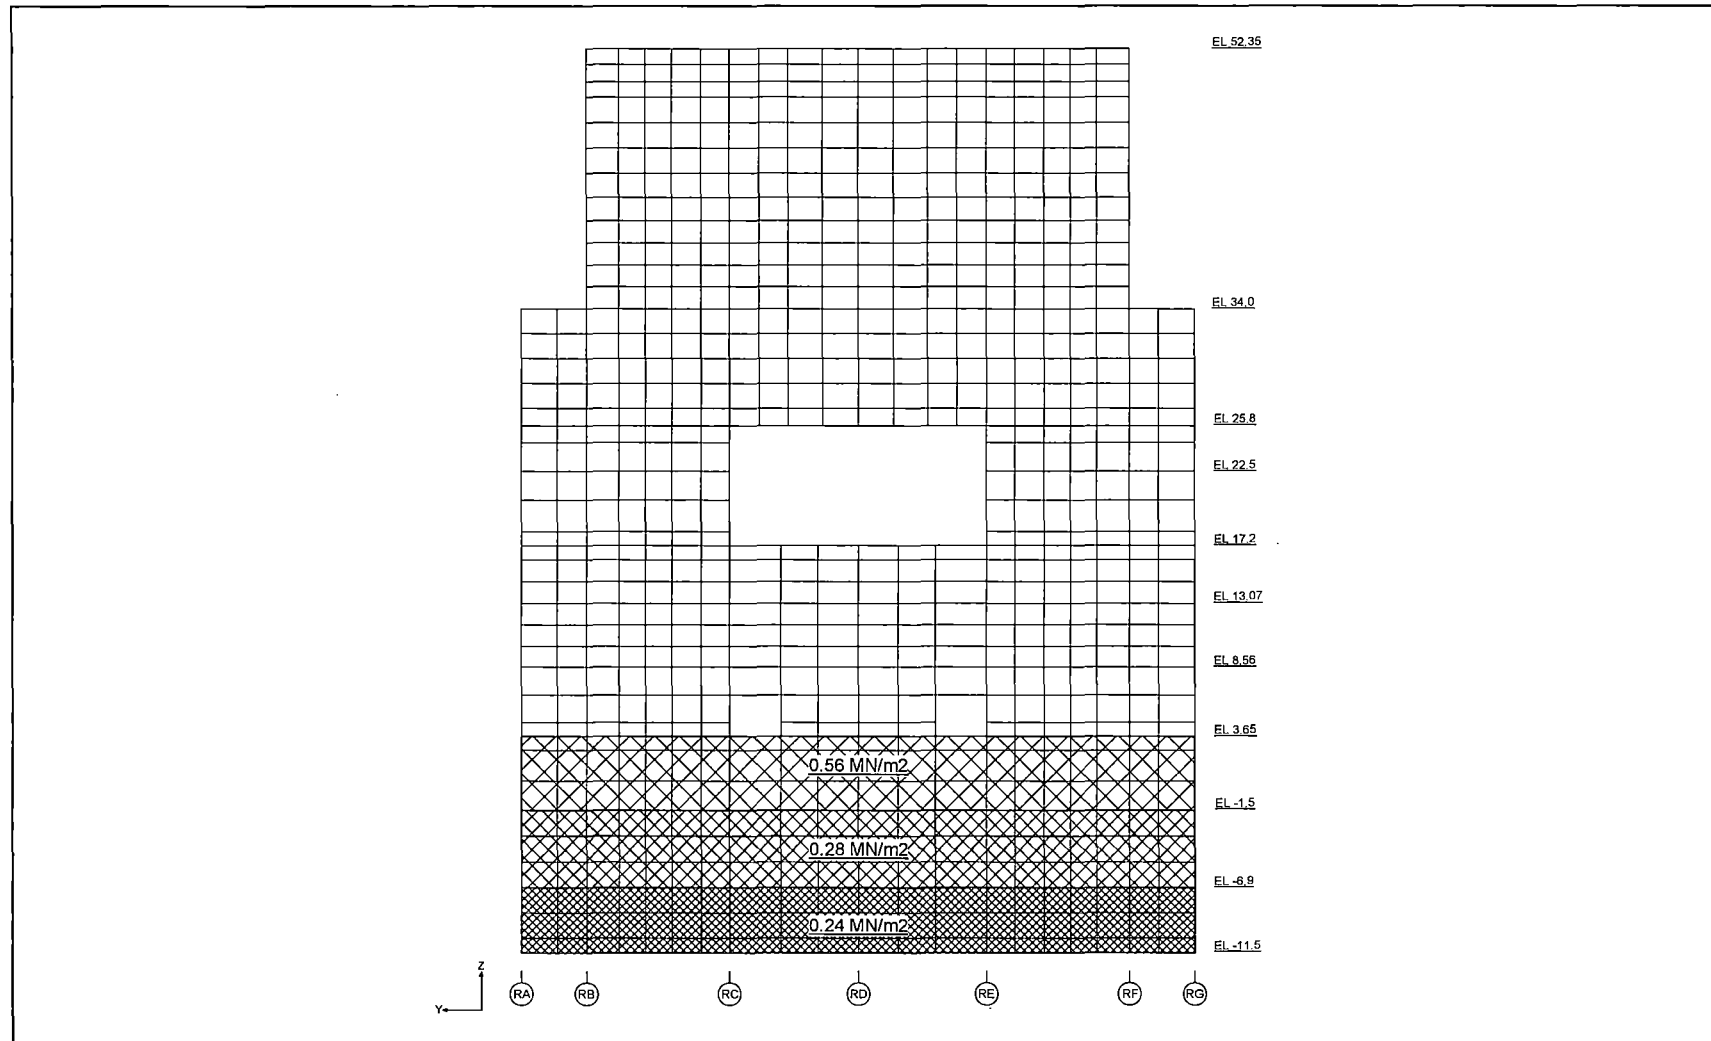


Figure 6.2.3.9-22 Soil Pressure Due to N-S Direction Earthquake on the External Wall (R1 Column Line)

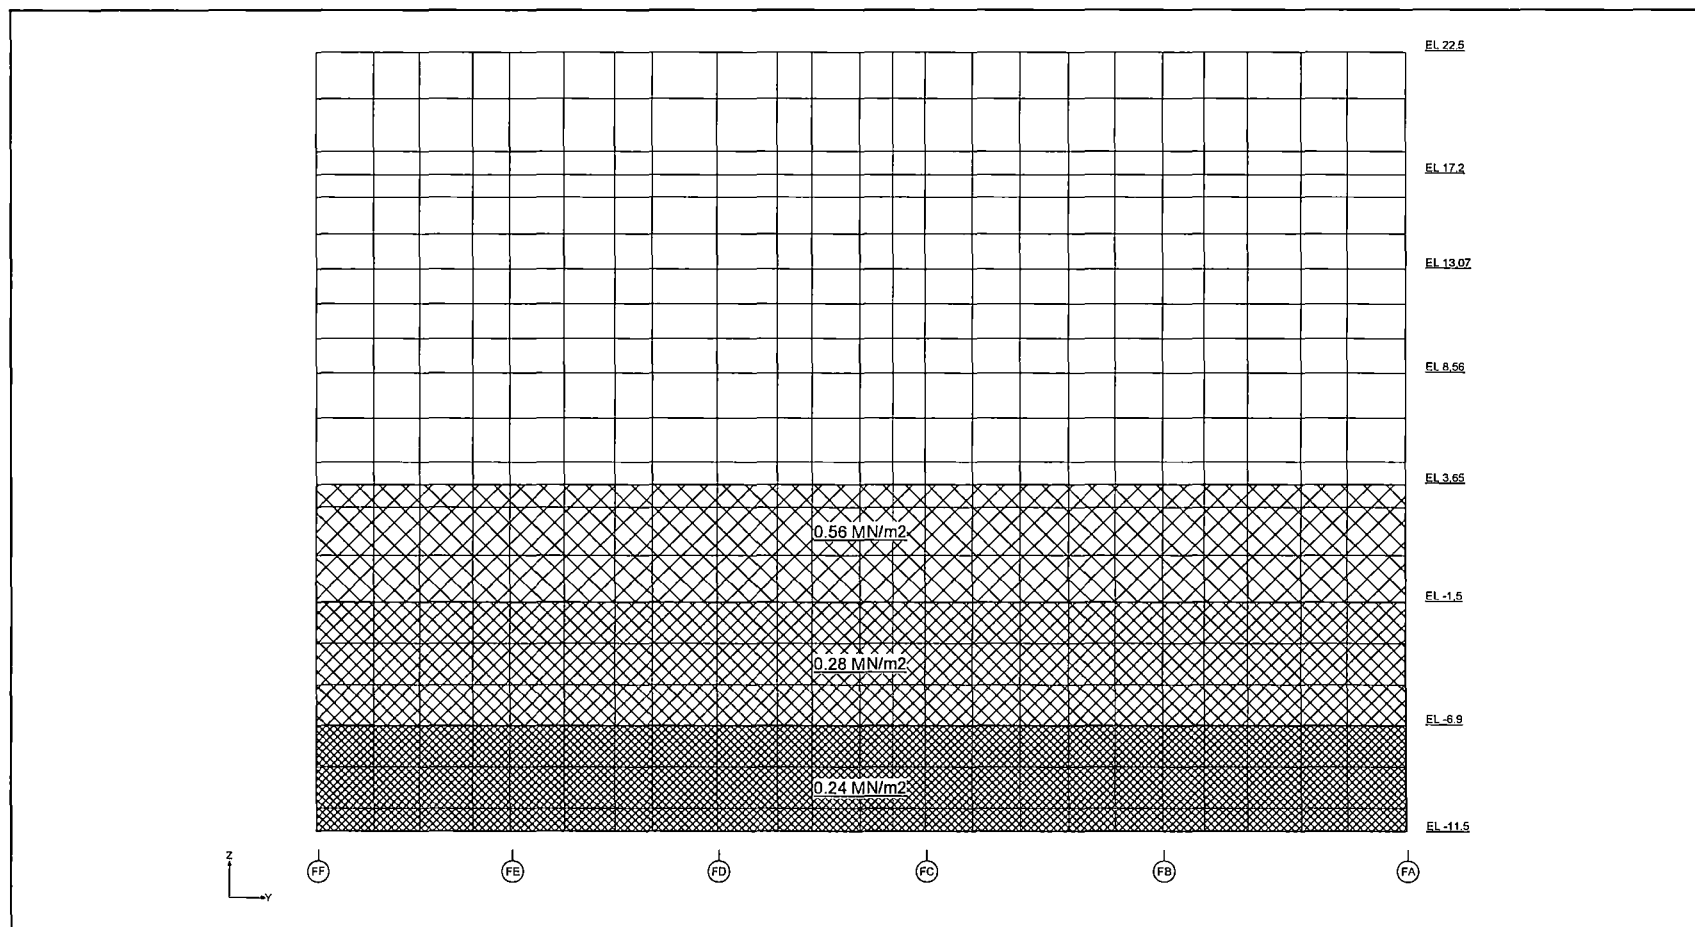


Figure 6.2.3.9-23 Soil Pressure Due to N-S Direction Earthquake on the External Wall (F3 Column Line)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 447

REV. 2

of 543




Figure 6.2.3.9-24 Soil Pressure Due to E-W Direction Earthquake on the Basemat

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004

SH NO. 448

REV. 2

of 543

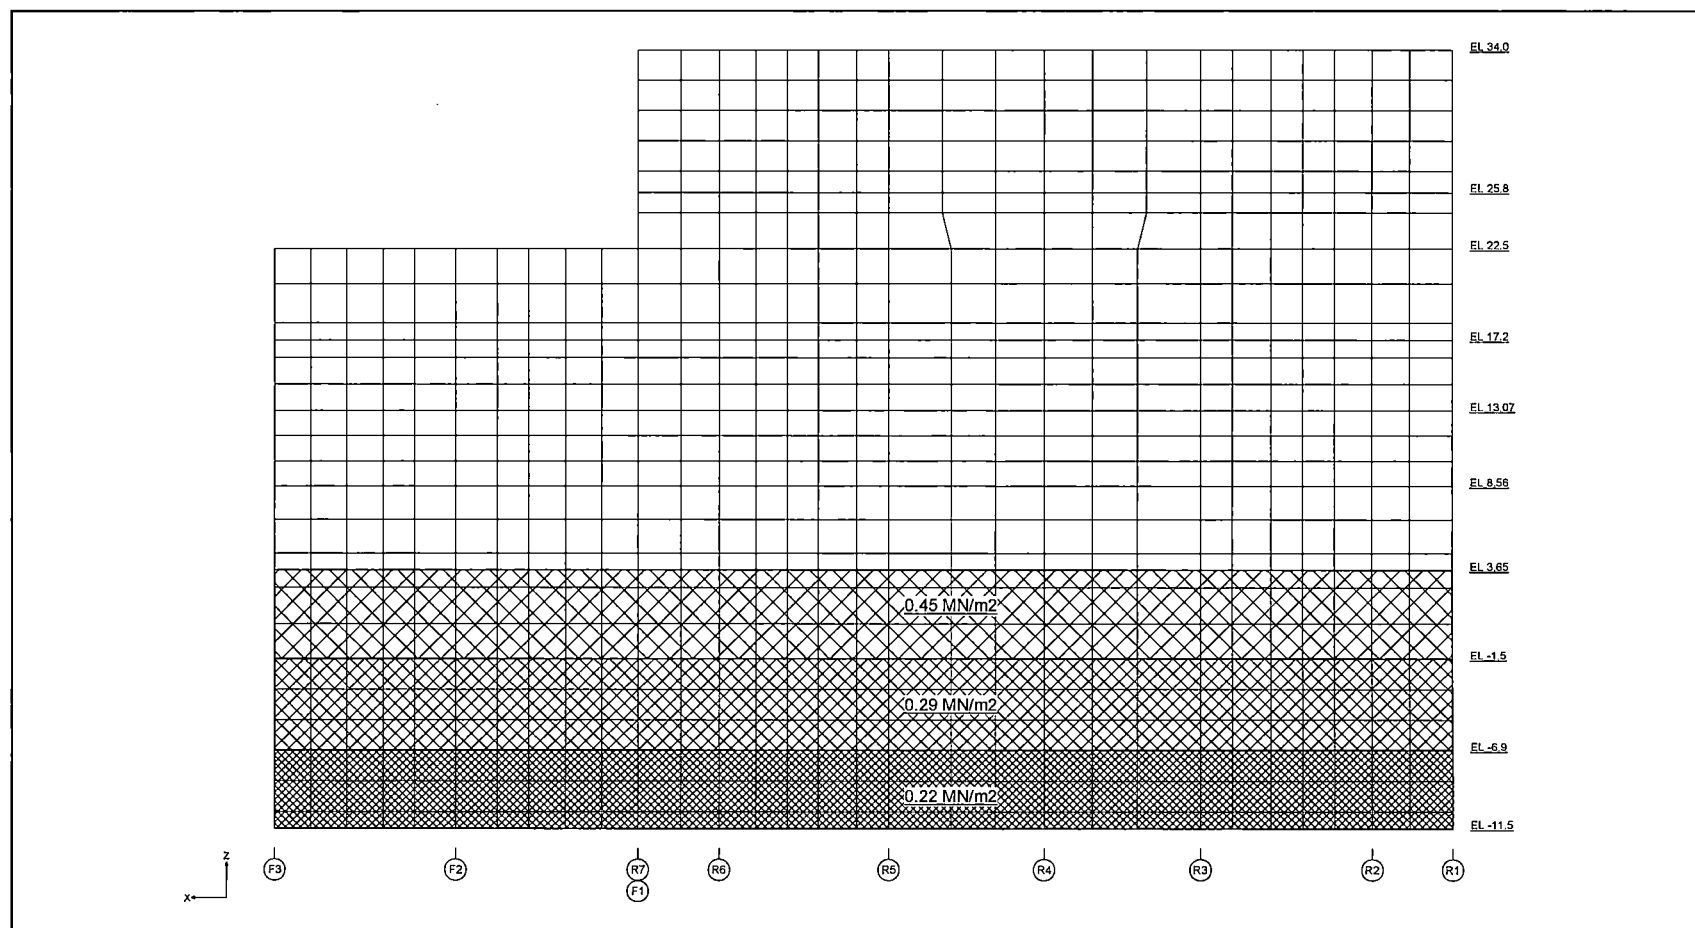


Figure 6.2.3.9-25 Soil Pressure Due to E-W Direction Earthquake on the External Wall (RA/FA Column Line)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 449

REV. 2

of 543

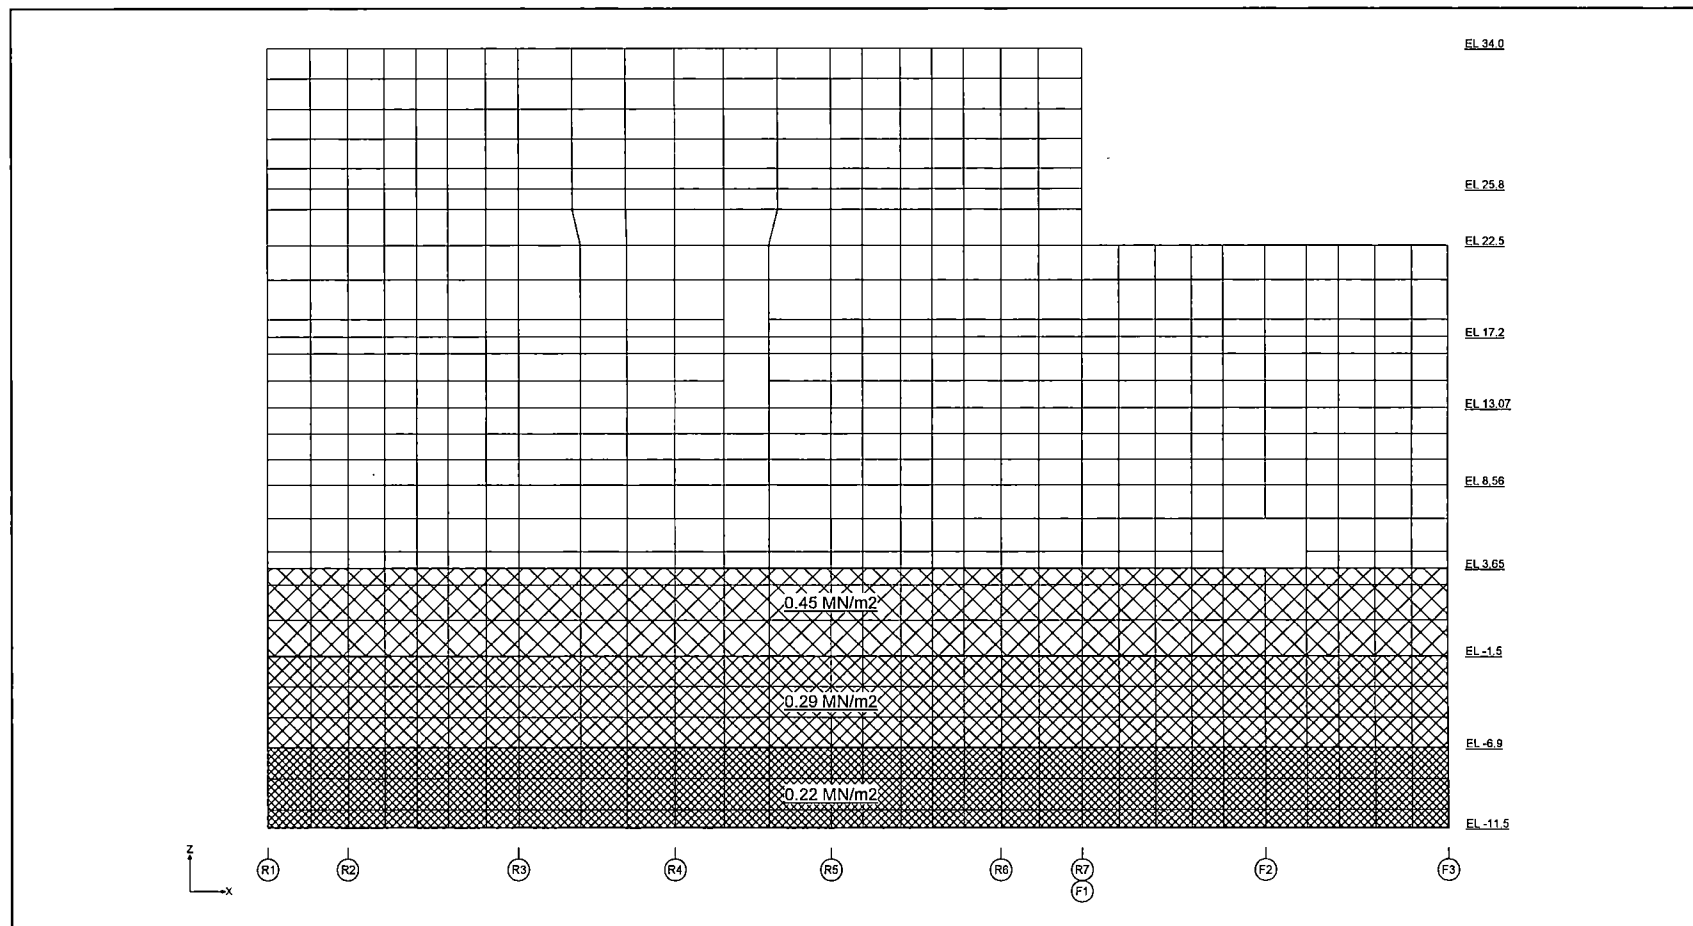


Figure 6.2.3.9-26 Soil Pressure Due to E-W Direction Earthquake on the External Wall (RG/FF Column Line)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 450

REV. 2

of 543

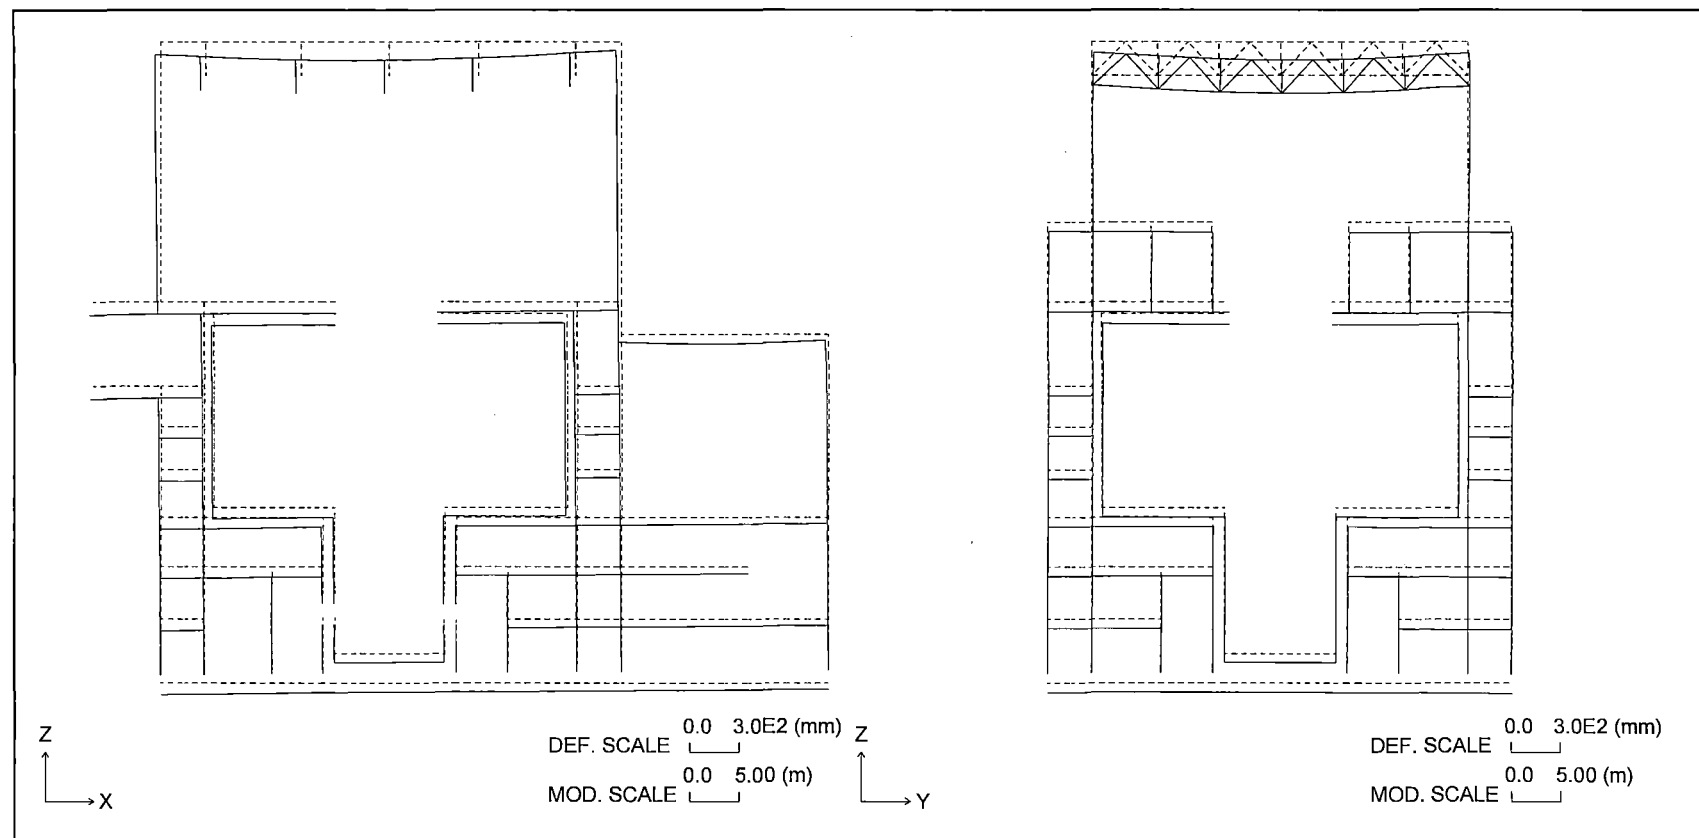


Figure 6.2.4-1 Section Deformation for Dead Load



HITACHI

WG3-U71-ERD-S-0004

SH NO. 451

REV. 2

of 543

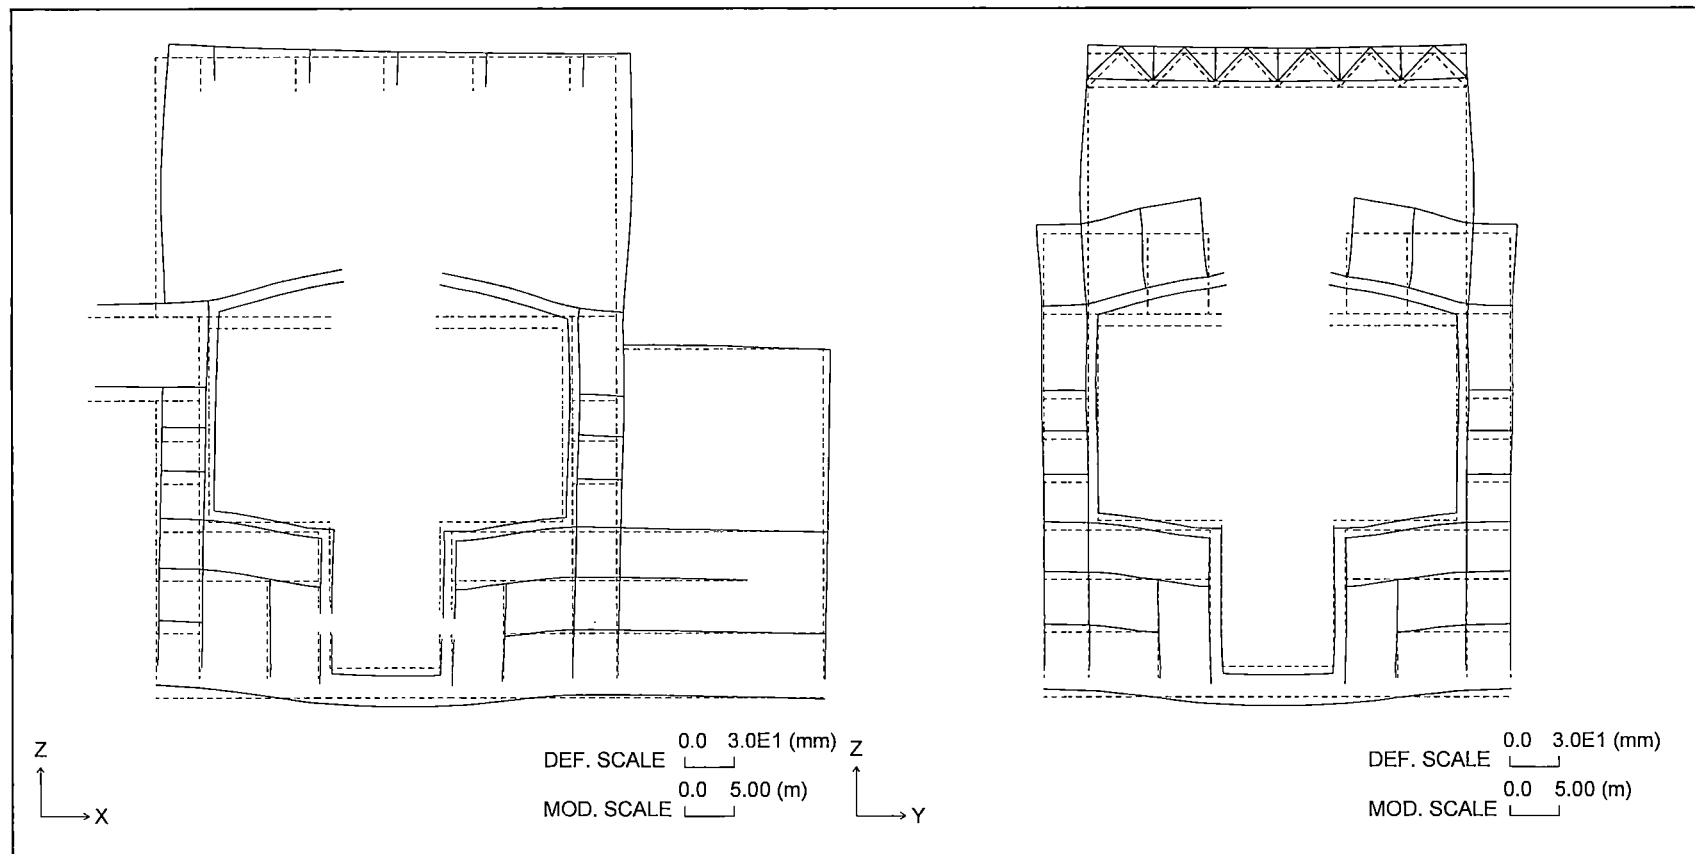


Figure 6.2.4-2 Section Deformation for Drywell Unit Pressure



HITACHI

WG3-U71-ERD-S-0004

SH NO. 452

REV. 2

of 543

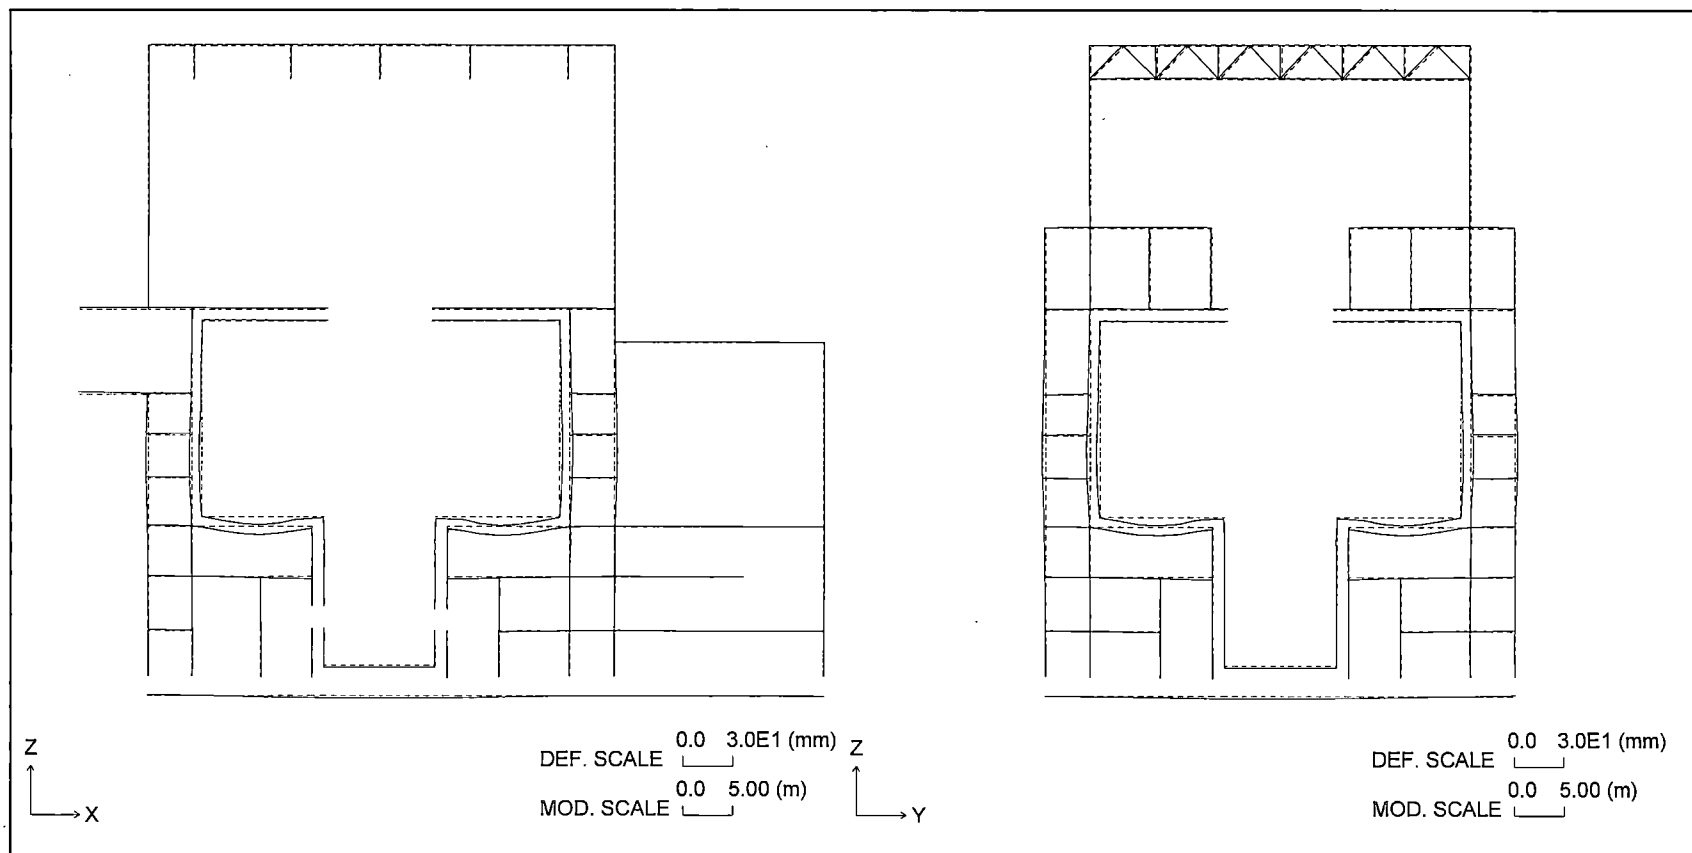


Figure 6.2.4-3 Section Deformation for Wetwell Unit Pressure (1 MPa)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 453

REV. 2

of 543

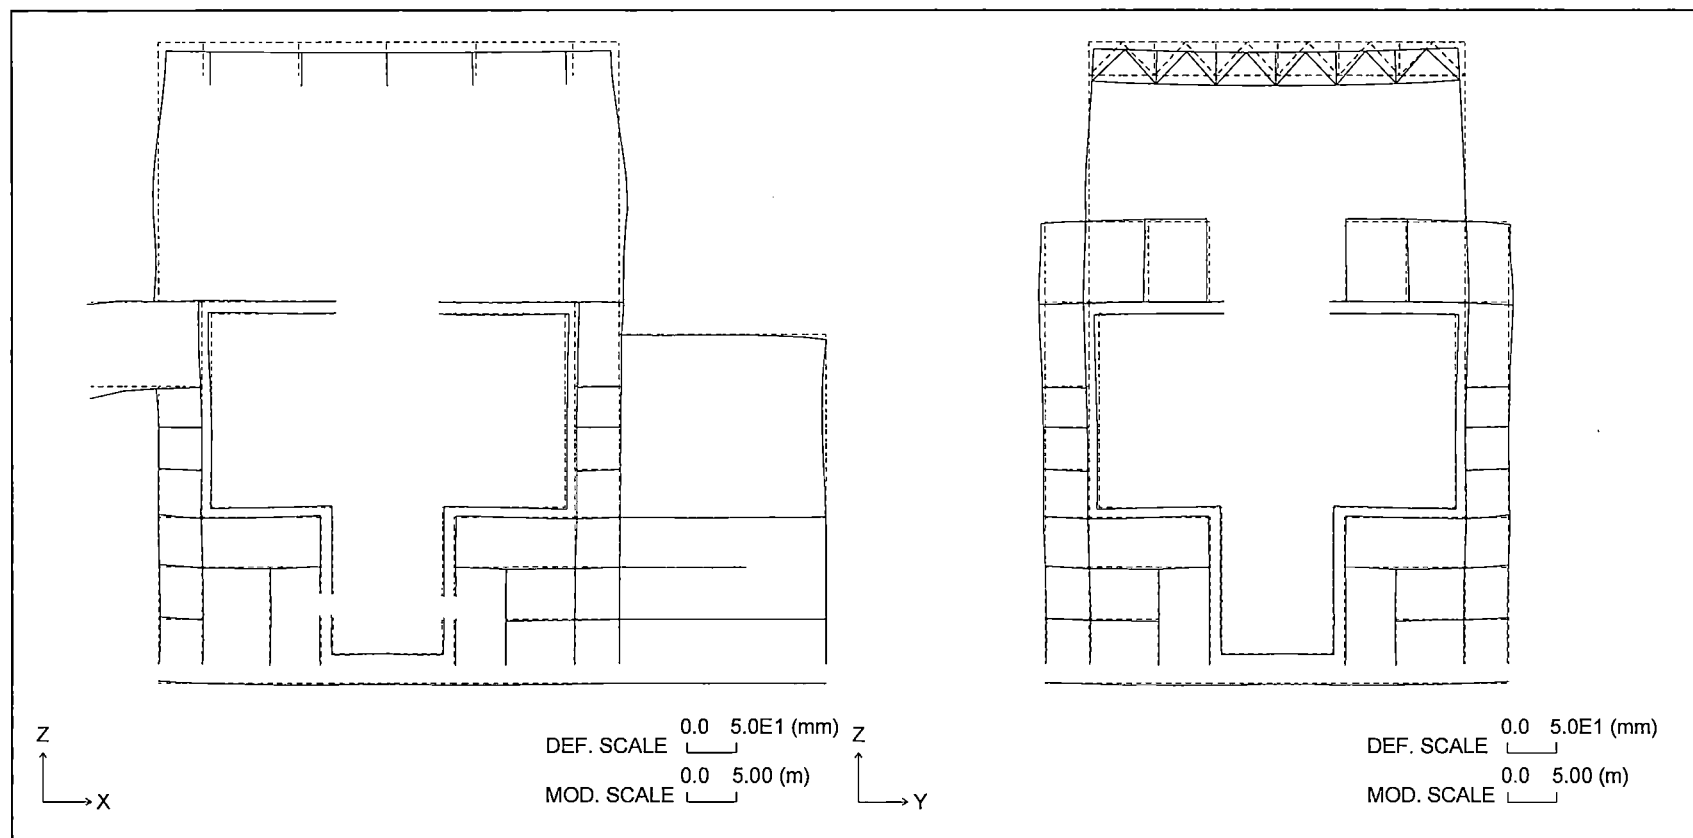


Figure 6.2.4-4 Section Deformation for Thermal Load (Normal Operation: Winter)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 454

REV. 2

of 543

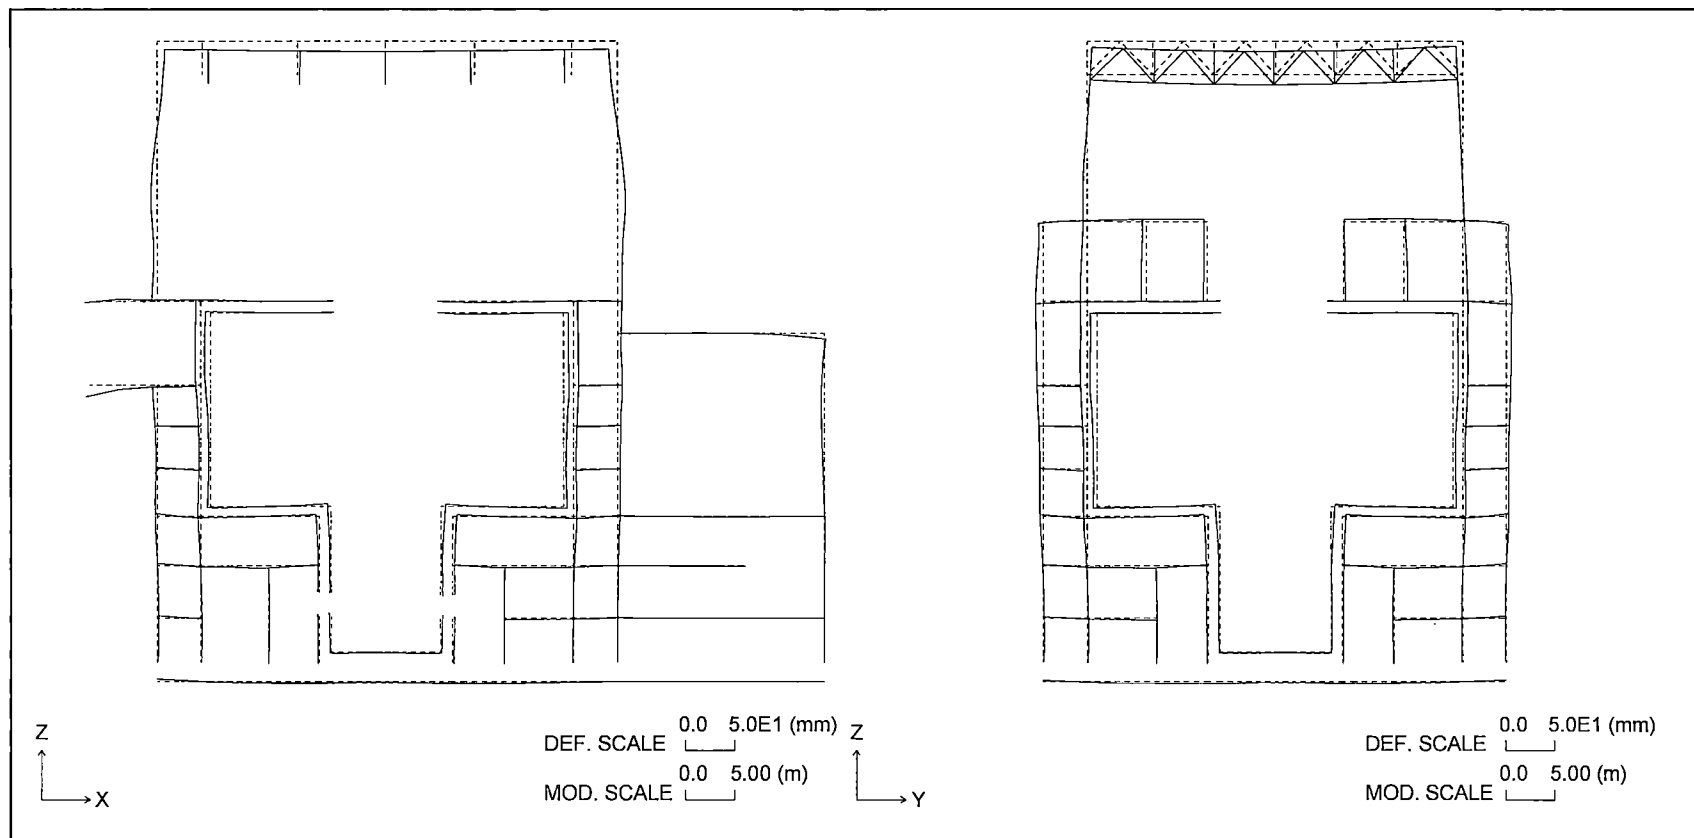


Figure 6.2.4-5 Section Deformation for Thermal Load (LOCA After 6 minutes: Winter)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 455

REV. 2

of 543

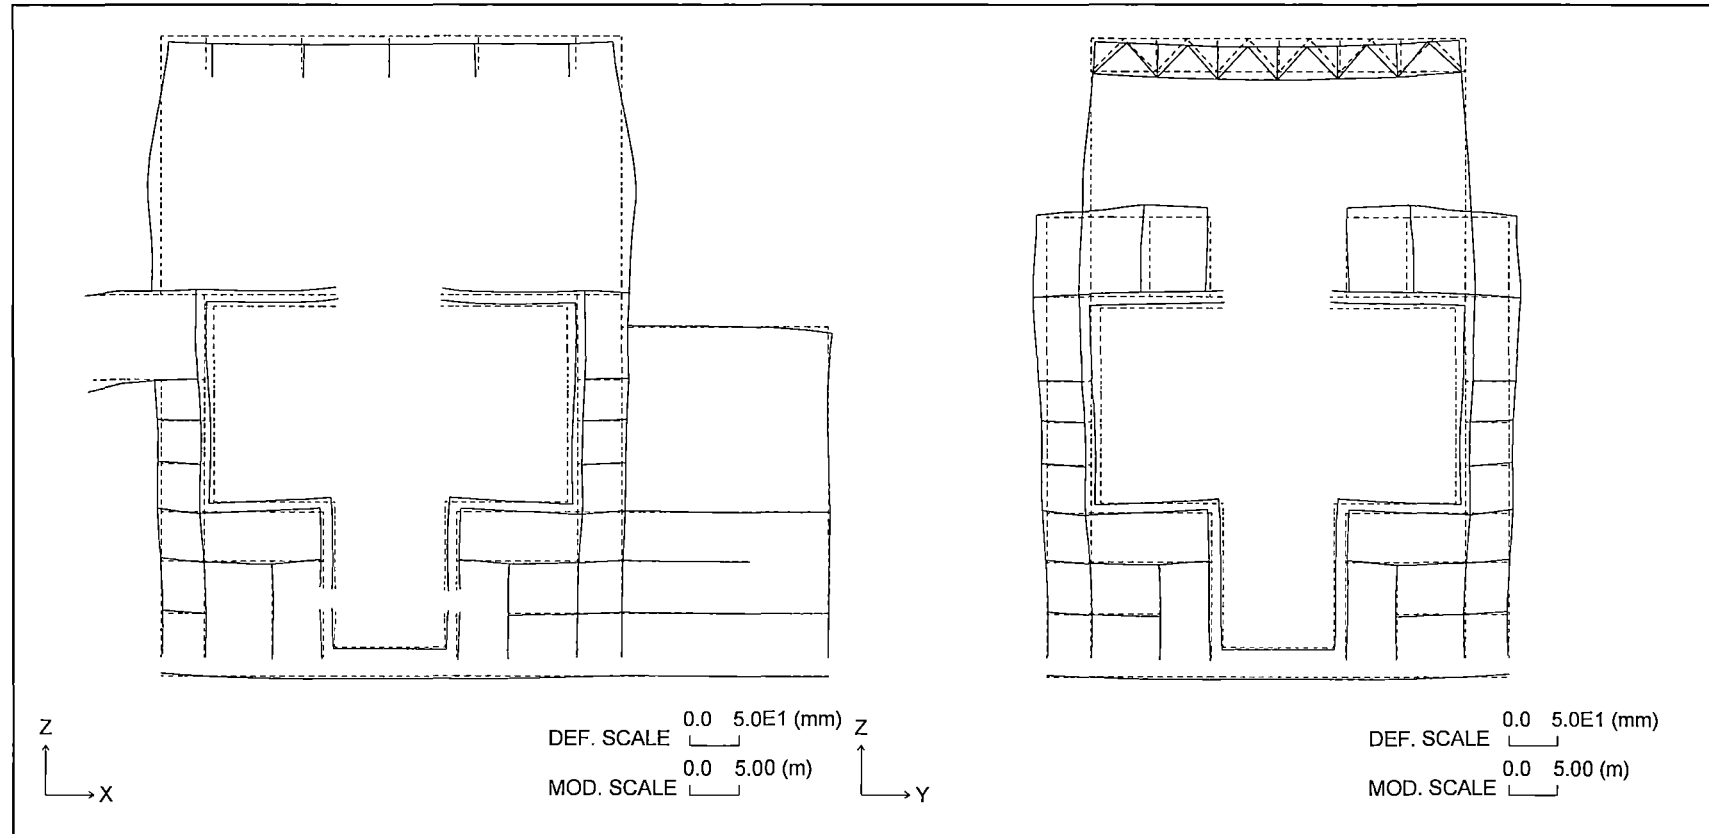


Figure 6.2.4-6 Section Deformation for Thermal Load (LOCA After 72 hours: Winter)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 456

REV. 2

of 543

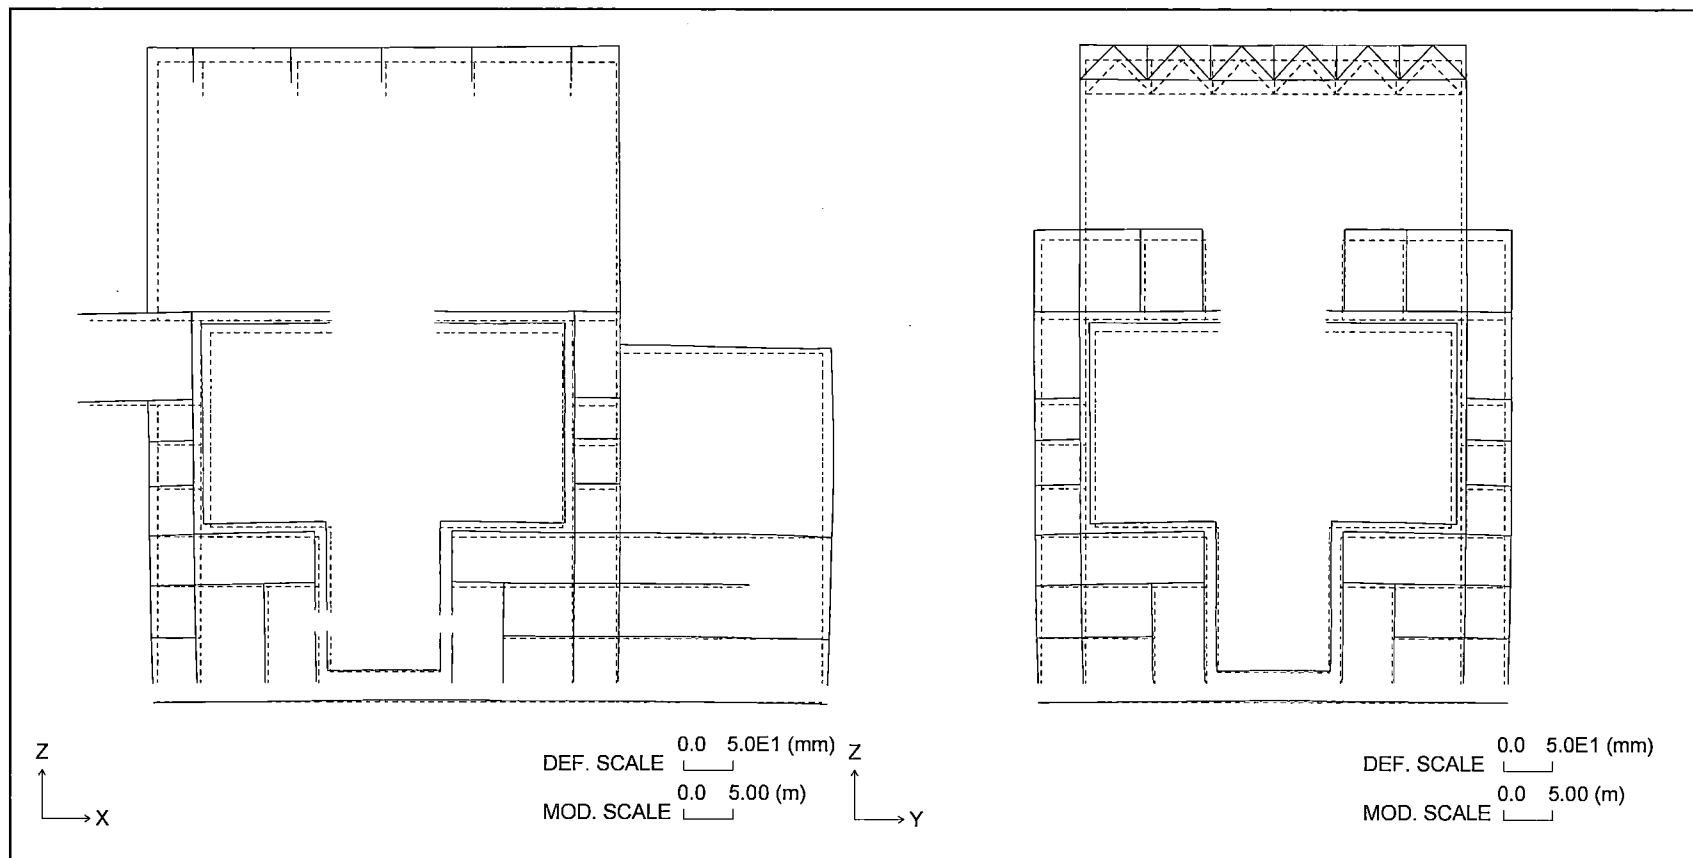


Figure 6.2.4-7 Section Deformation for Thermal Load (Normal Operation: Summer)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 457

REV. 2

of 543

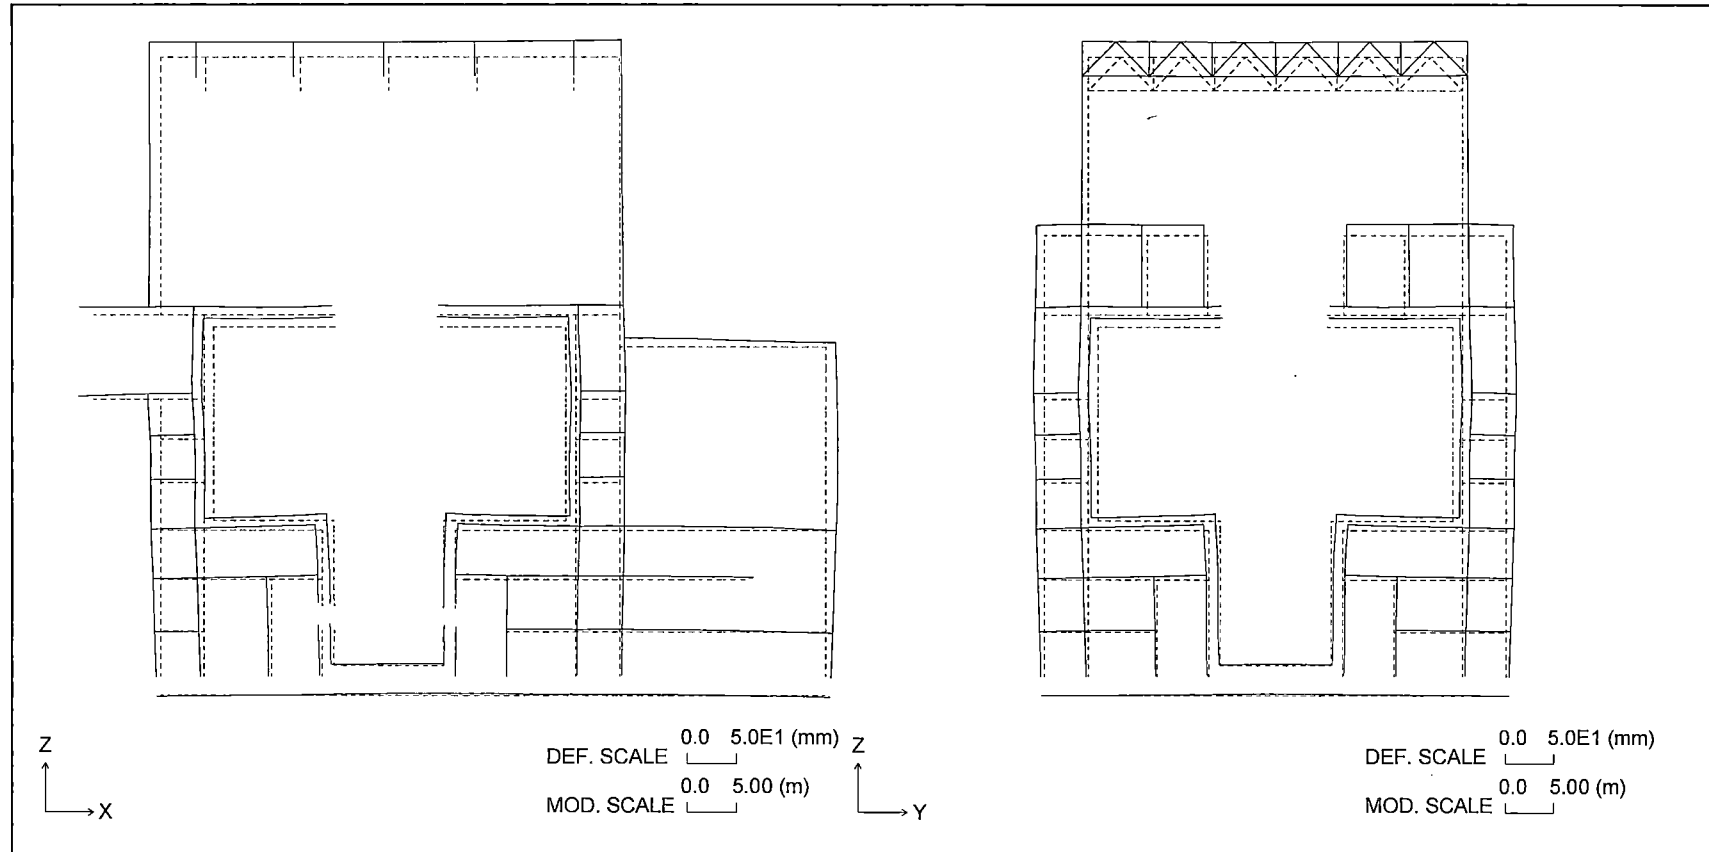


Figure 6.2.4-8 Section Deformation for Thermal Load (LOCA After 6 minutes: Summer)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 458

REV. 2

of 543

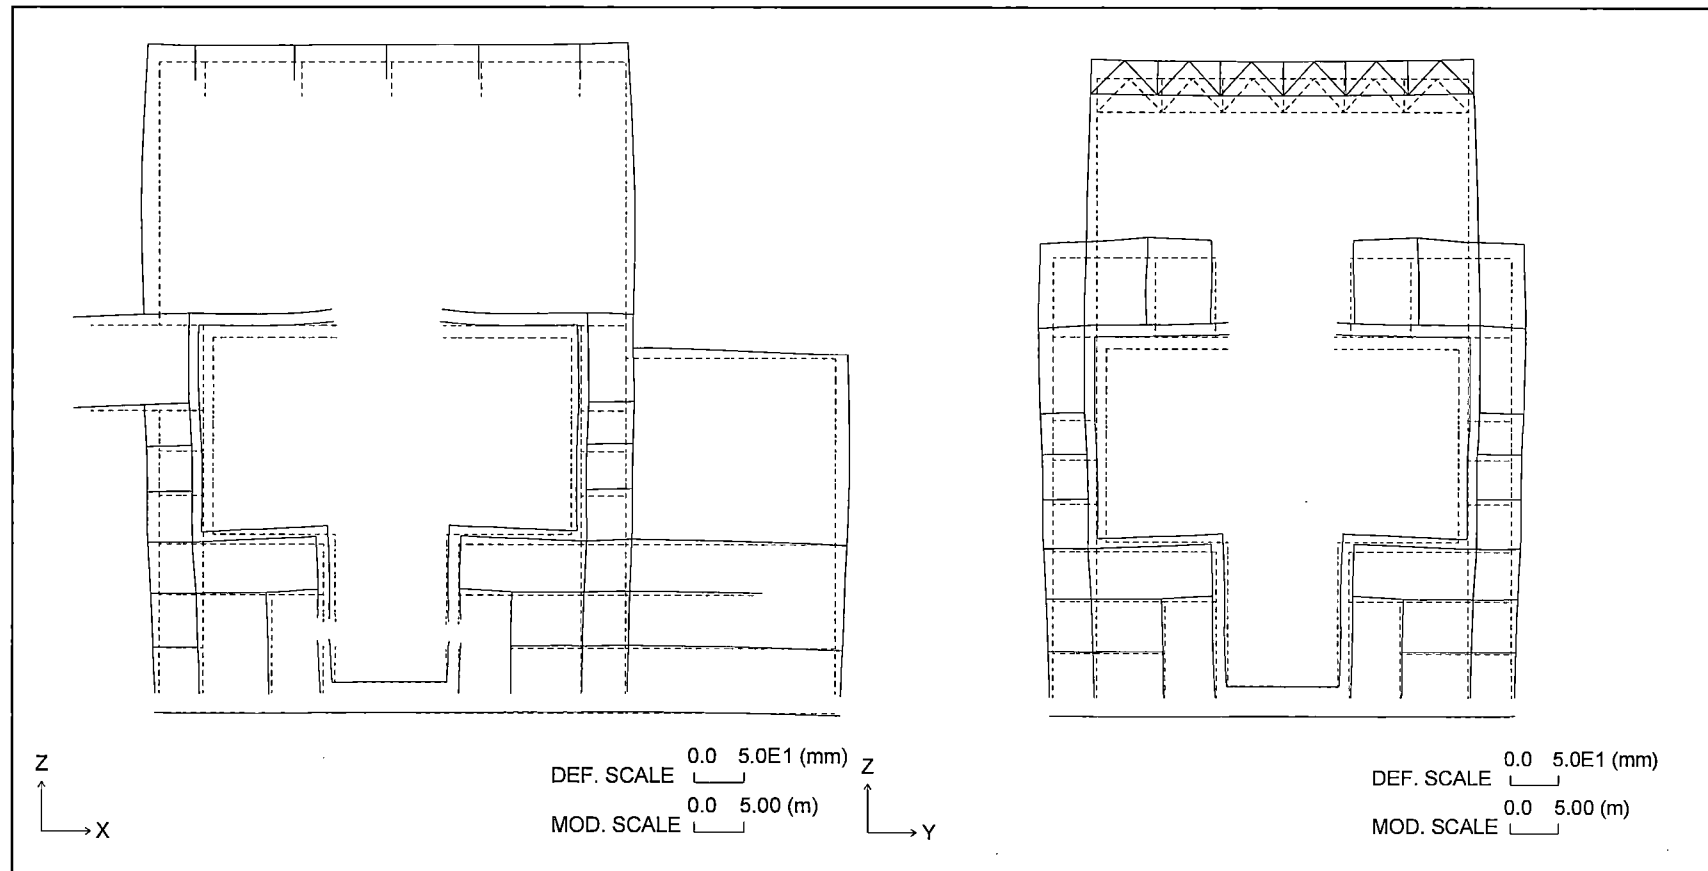


Figure 6.2.4-9 Section Deformation for Thermal Load (LOCA After 72 hours: Summer)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 459

REV. 2

of 543

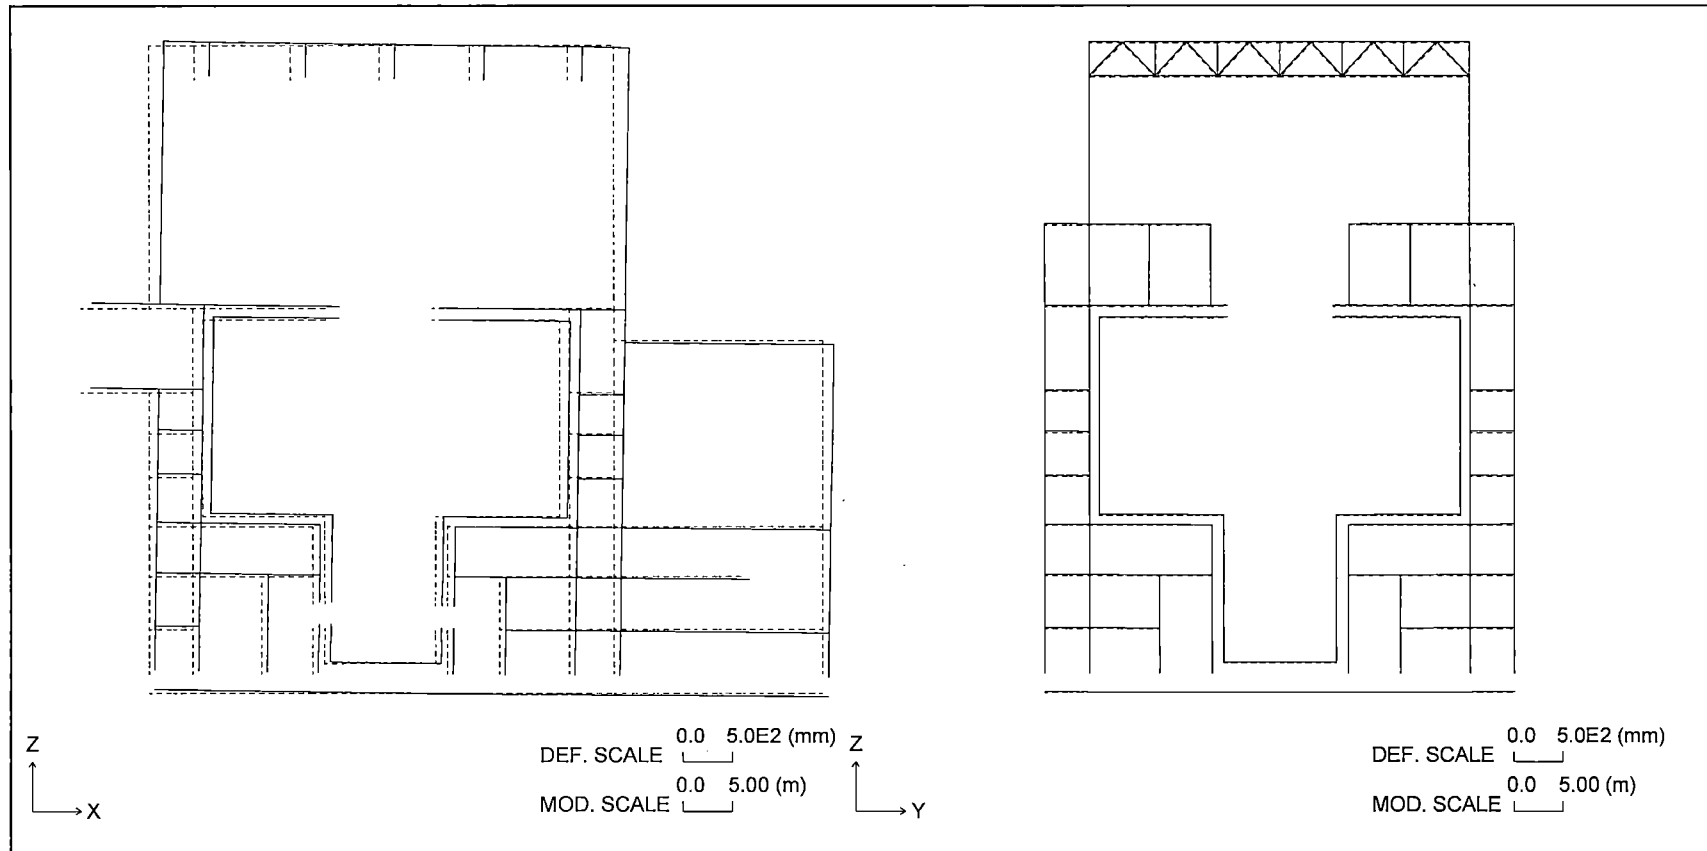


Figure 6.2.4-10 Section Deformation for Seismic Load (Horizontal: North to South)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 460

REV. 2

of 543

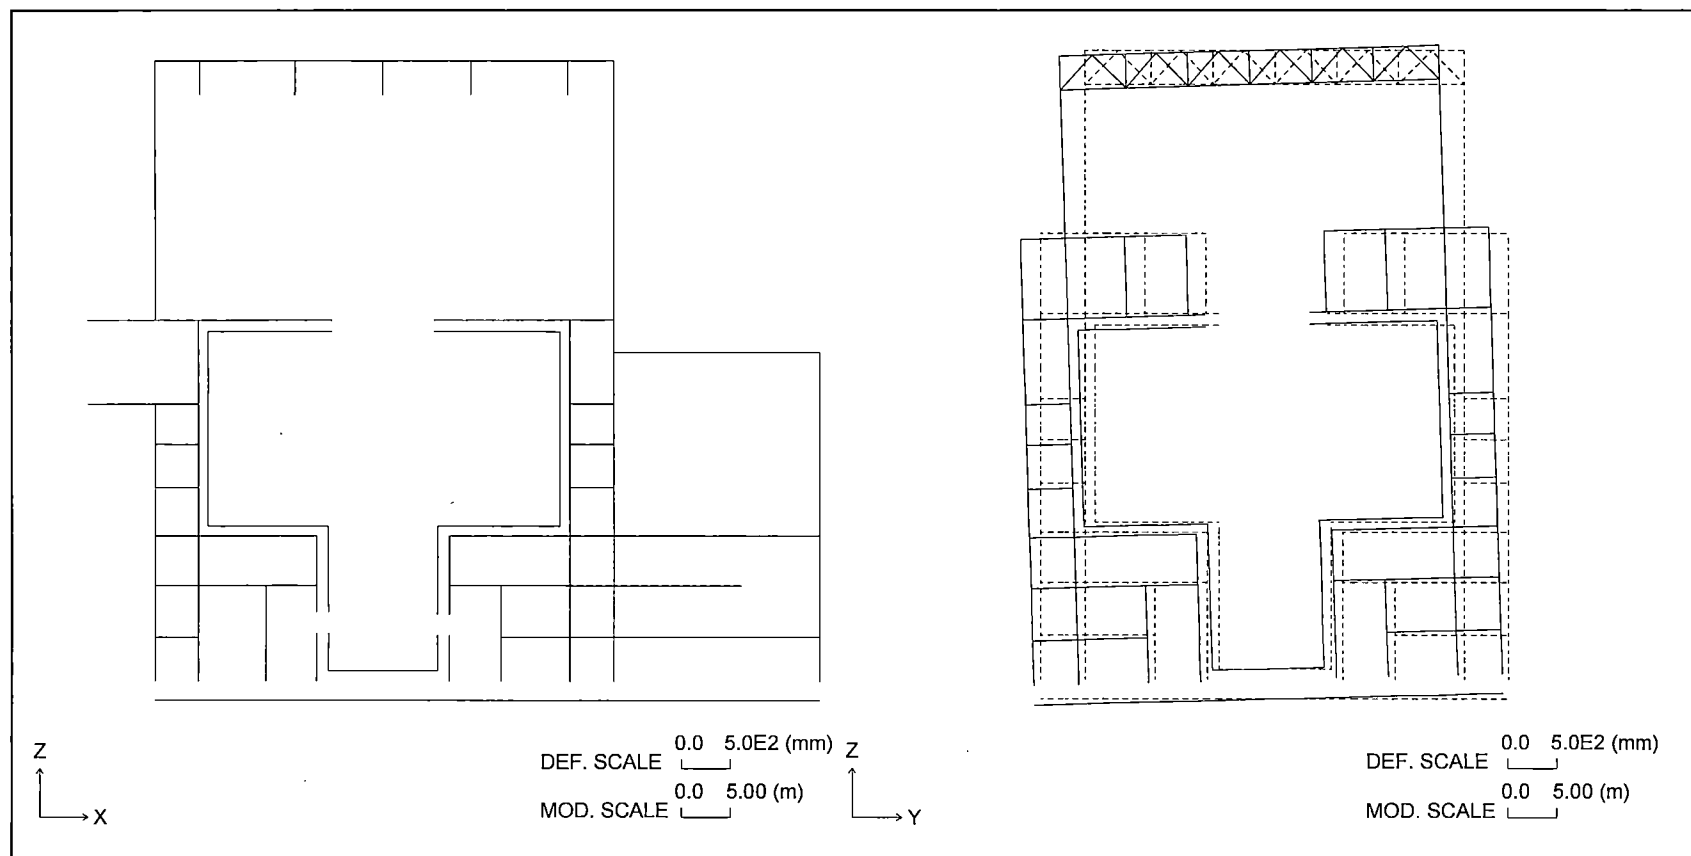


Figure 6.2.4-11 Section Deformation for Seismic Load (Horizontal: East to West)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 461

REV. 2

of 543

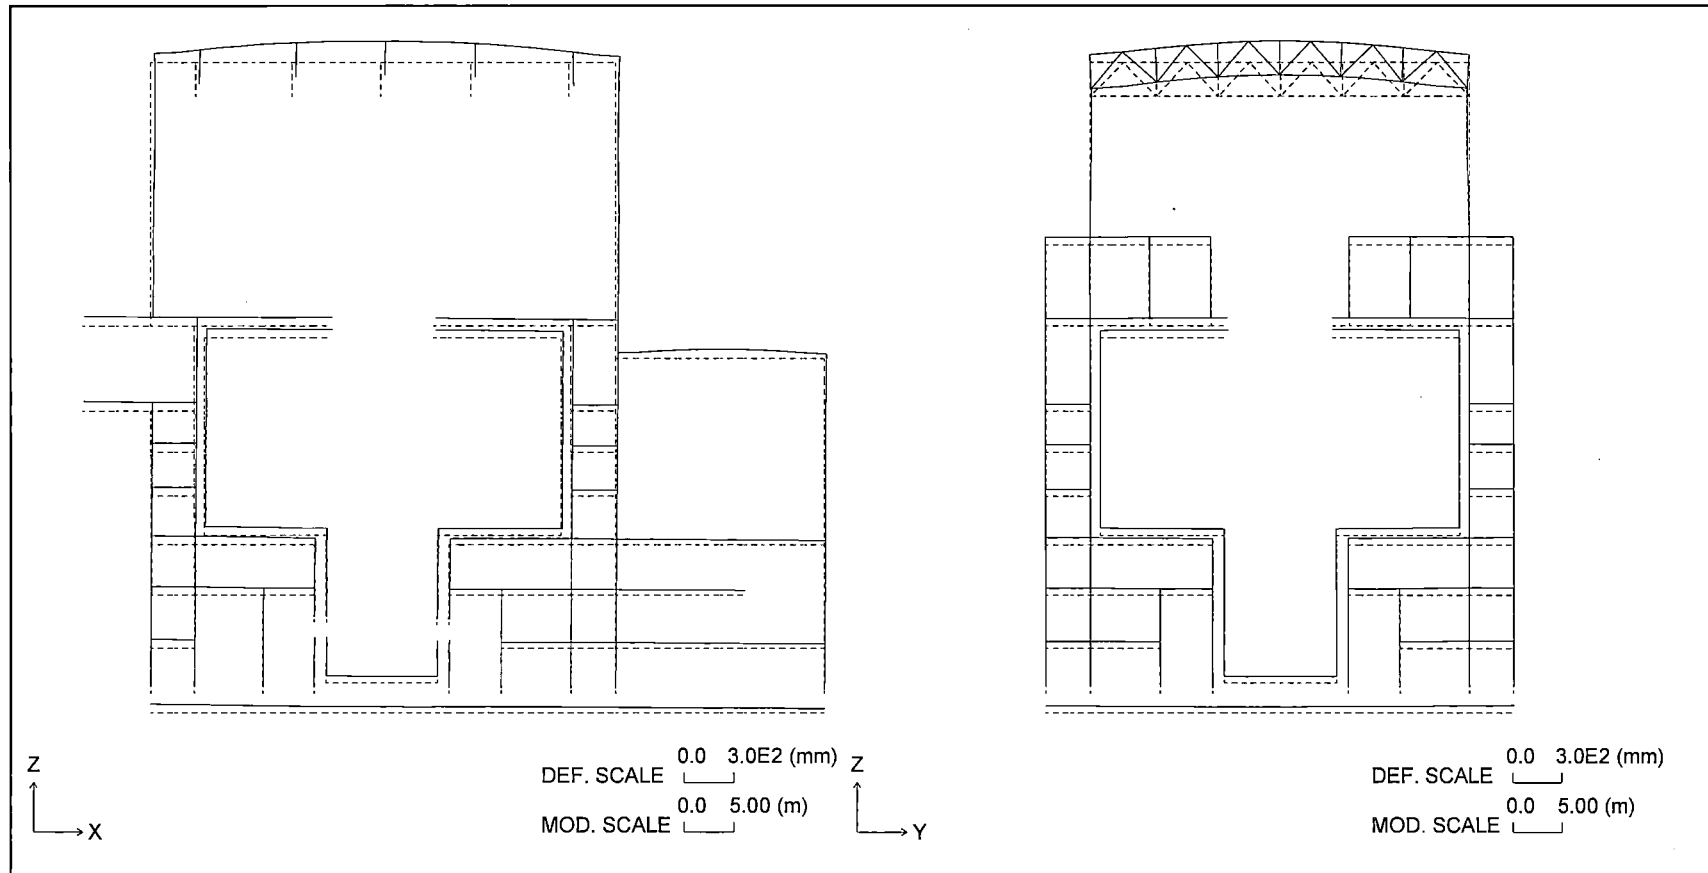


Figure 6.2.4-12 Section Deformation for Seismic Load (Vertical: Upward)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 462

REV. 2

of 543

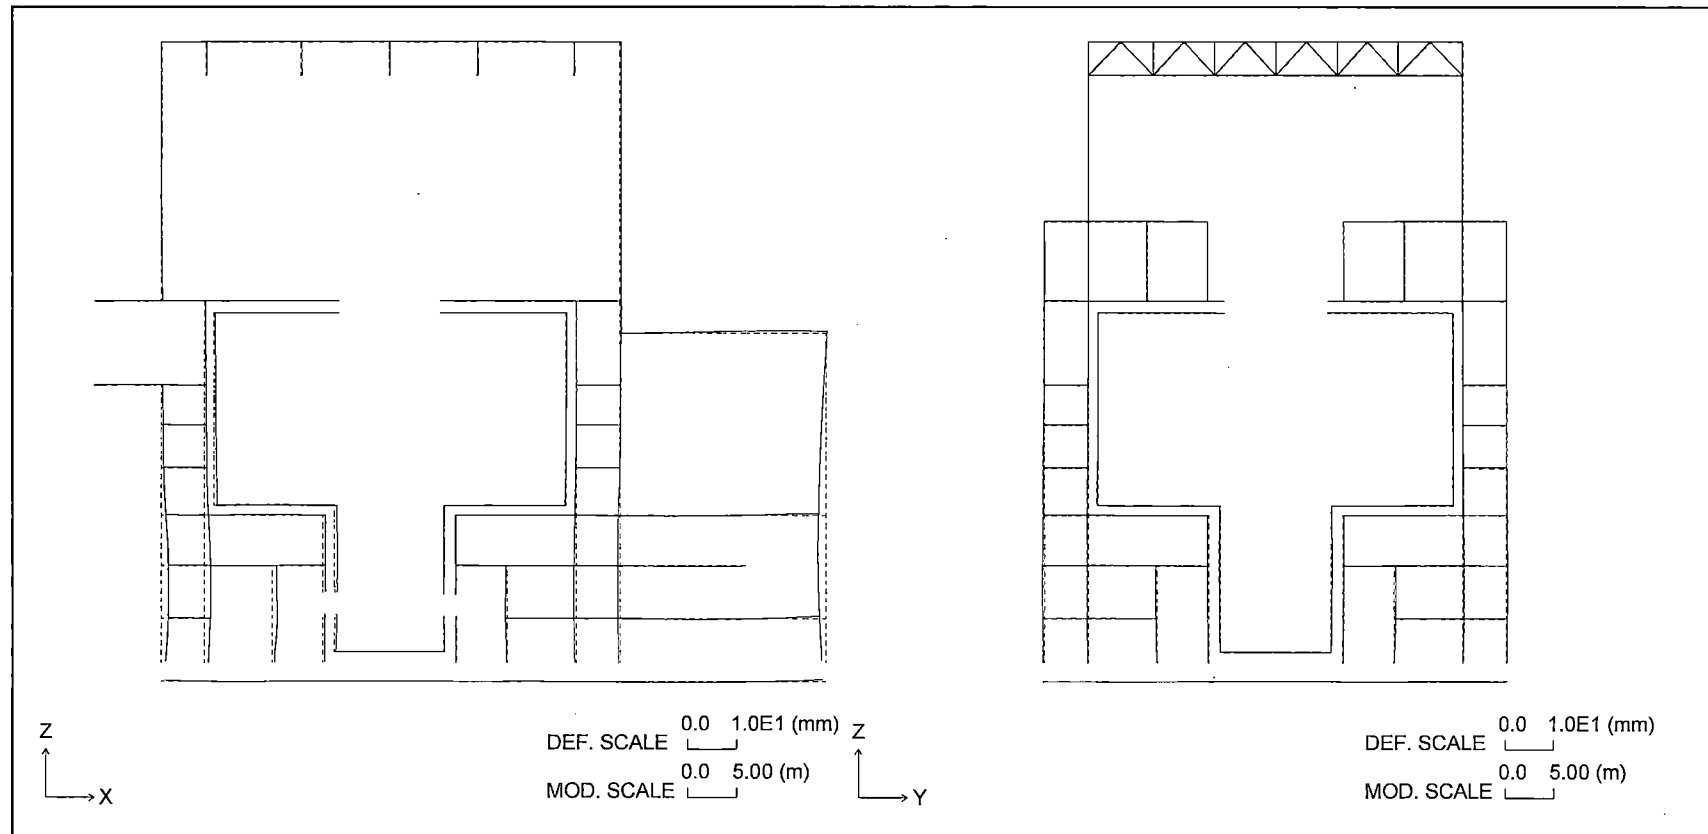


Figure 6.2.4-13 Section Deformation for Soil Pressure Due to an Earthquake (N-S)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 463

REV. 2

of 543

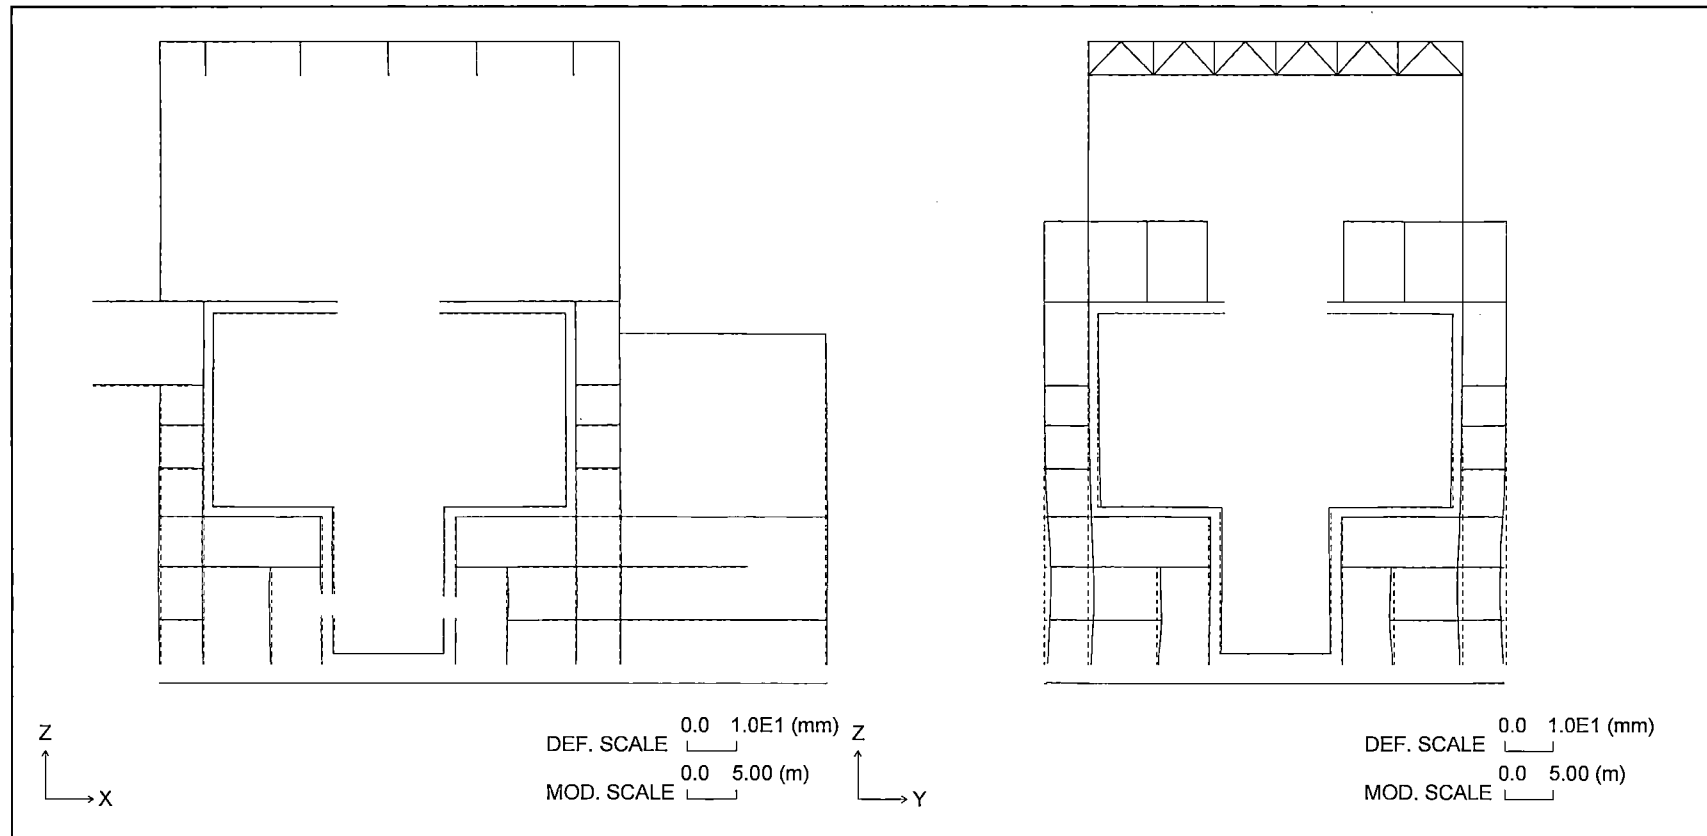


Figure 6.2.4-14 Section Deformation for Soil Pressure Due to an Earthquake (E-W)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 464

REV. 2

of 543

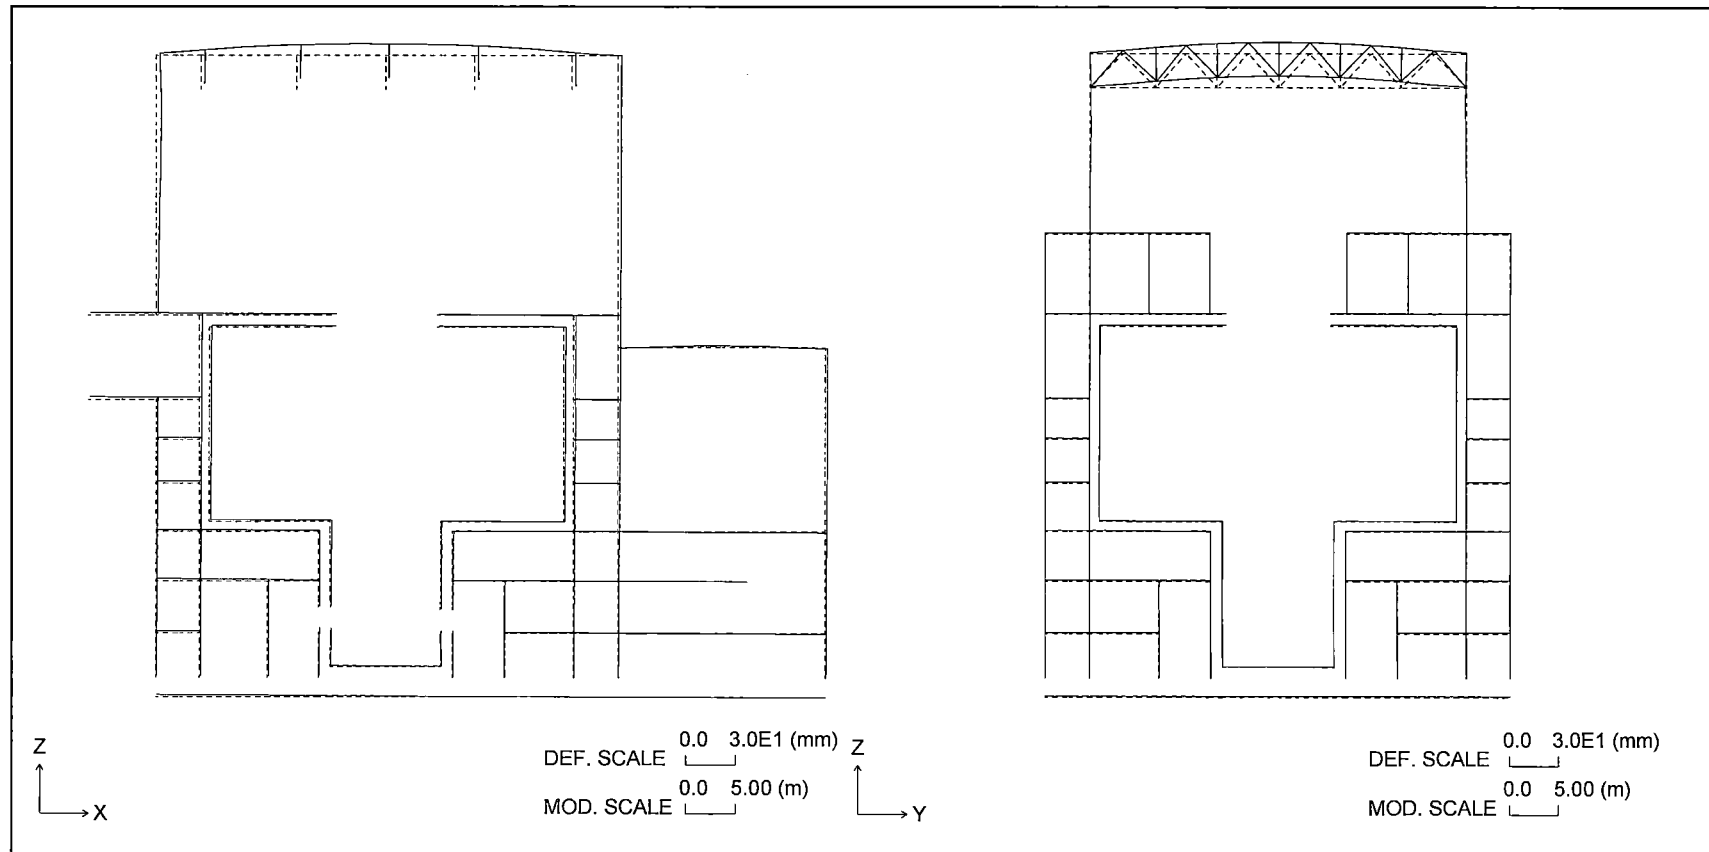


Figure 6.2.4-15 Section Deformation for Wind Load (North Wind)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 465

REV. 2

of 543

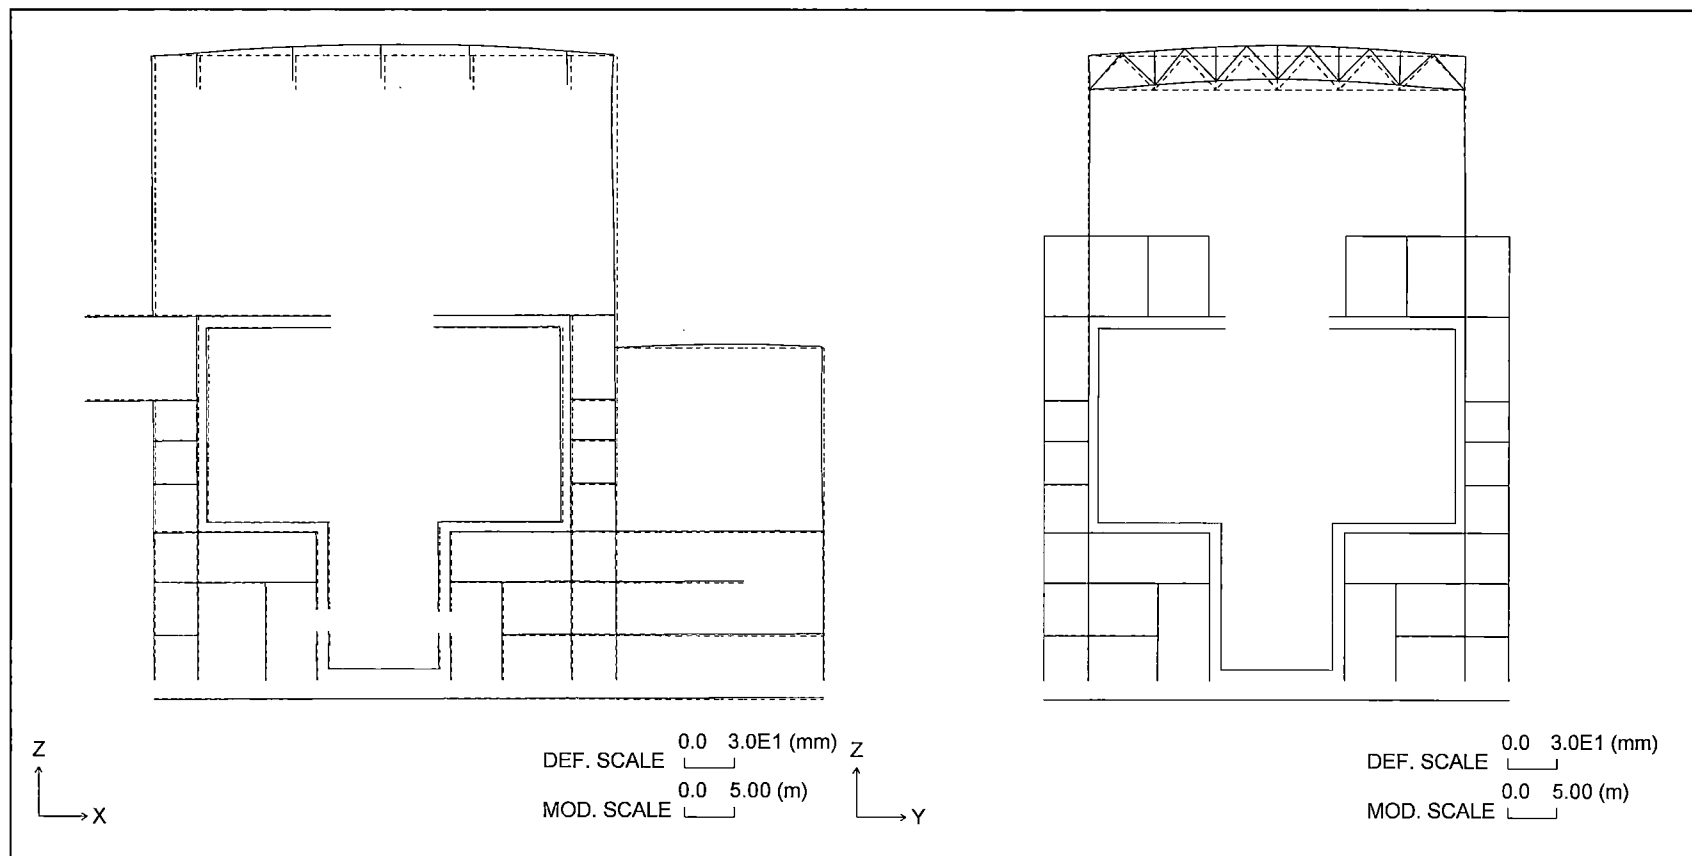


Figure 6.2.4-16 Section Deformation for Wind Load (South Wind)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 466

REV. 2

of 543

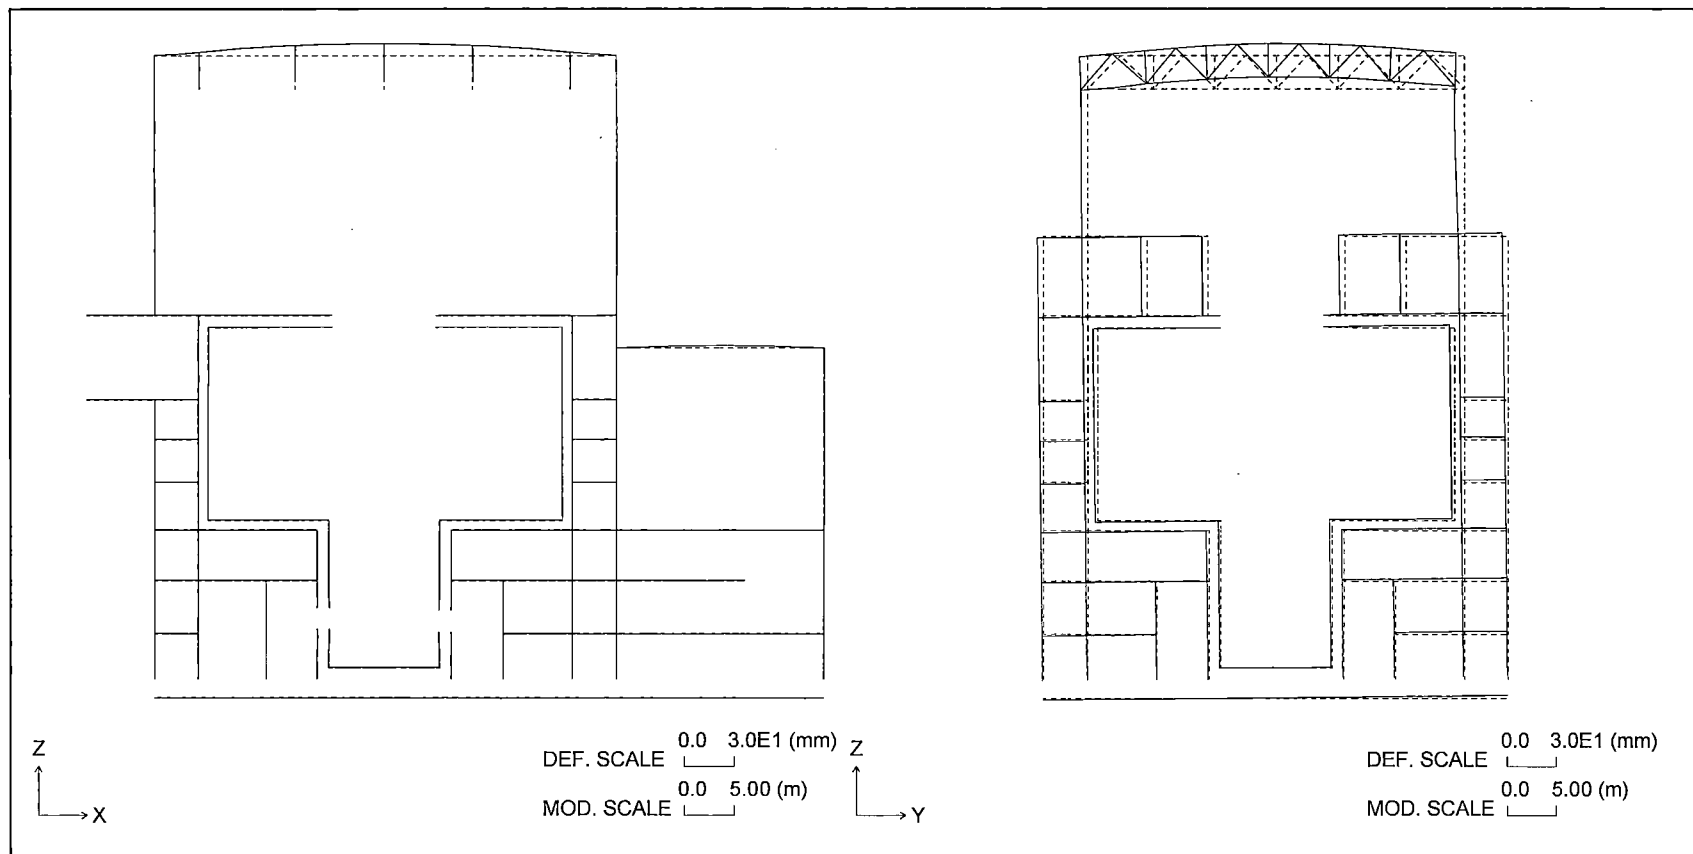


Figure 6.2.4-17 Section Deformation for Wind Load (East Wind)



HITACHI

WG3-U71-ERD-S-0004 SH NO. 467

REV. 2

of 543

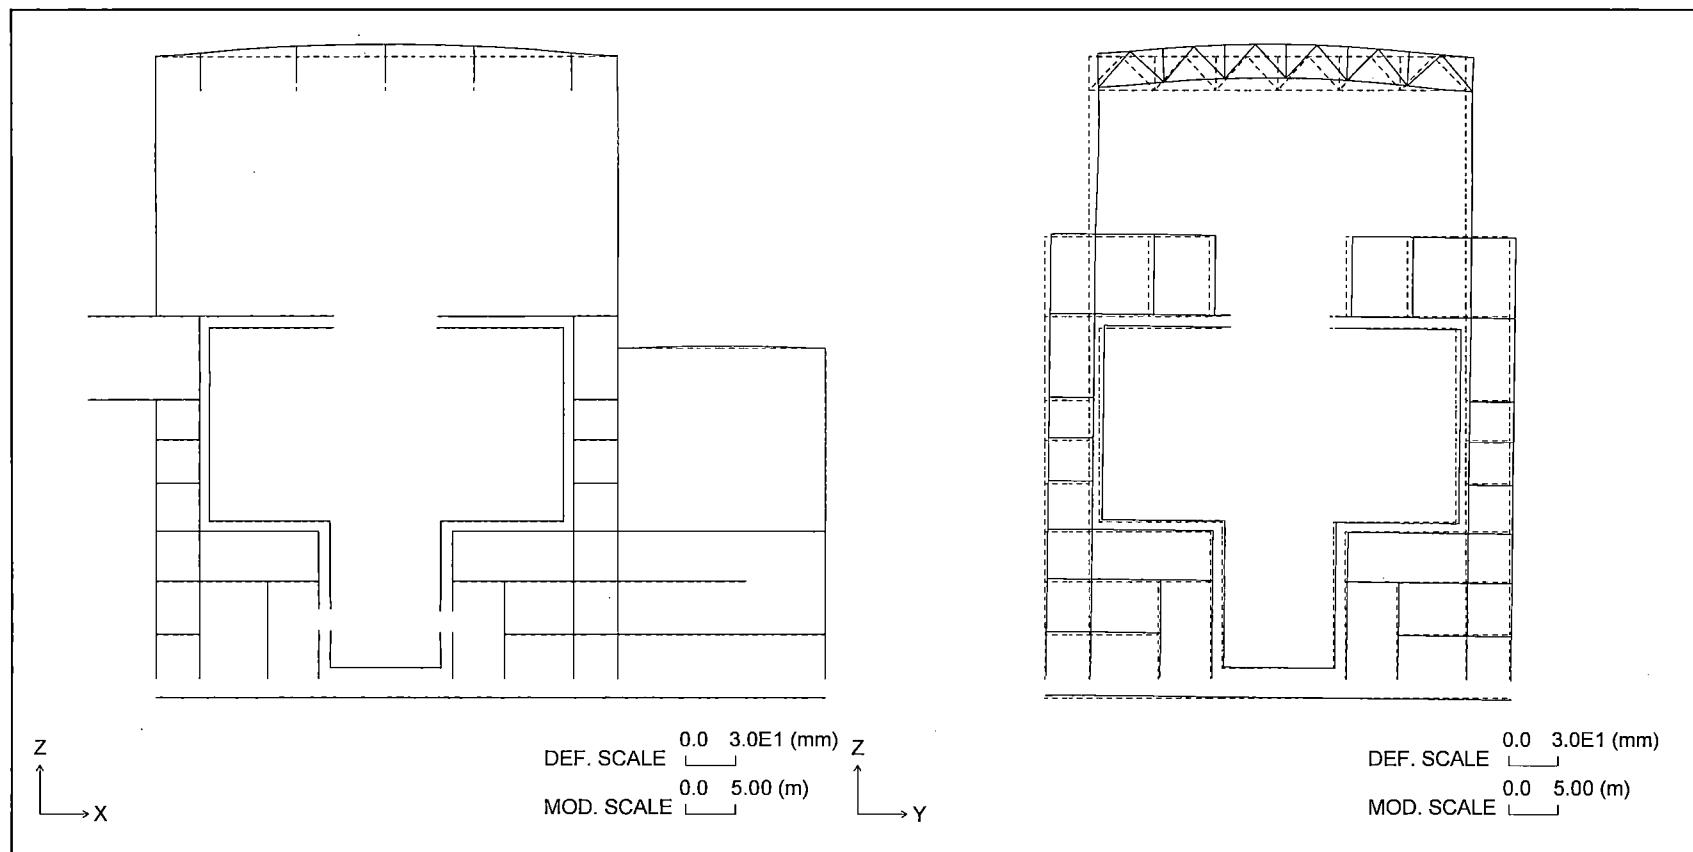


Figure 6.2.4-18 Section Deformation for Wind Load (West Wind)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 468

REV. 2

of 543

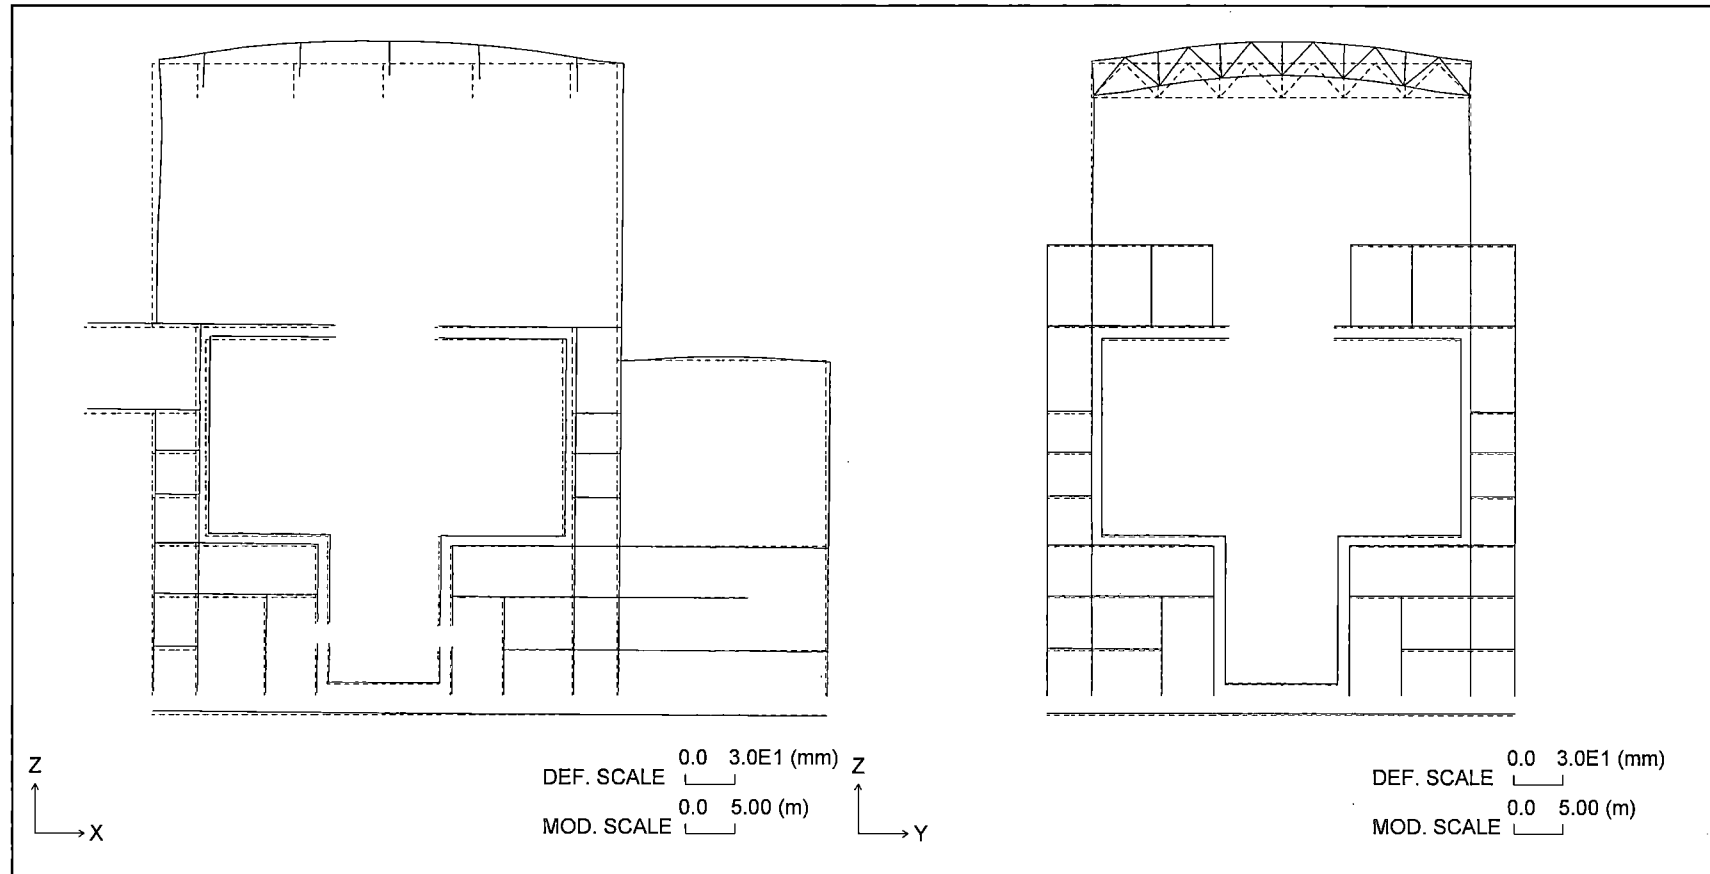


Figure 6.2.4-19 Section Deformation for Tornado Load (North Wind)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 469

REV. 2

of 543

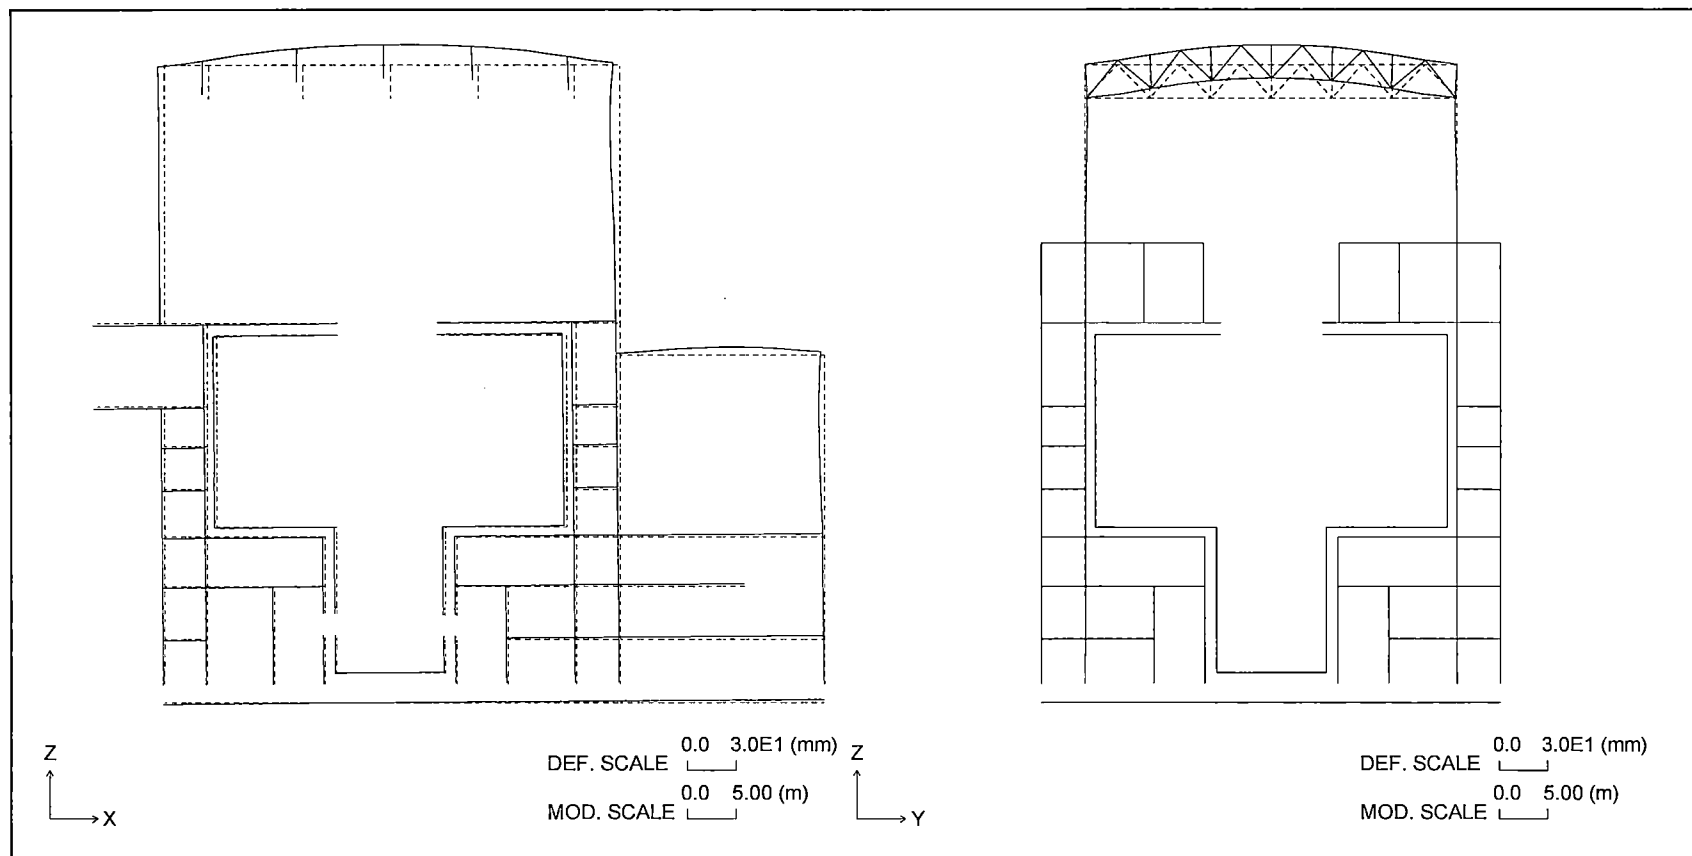


Figure 6.2.4-20 Section Deformation for Tornado Load (South Wind)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 470

REV. 2

of 543

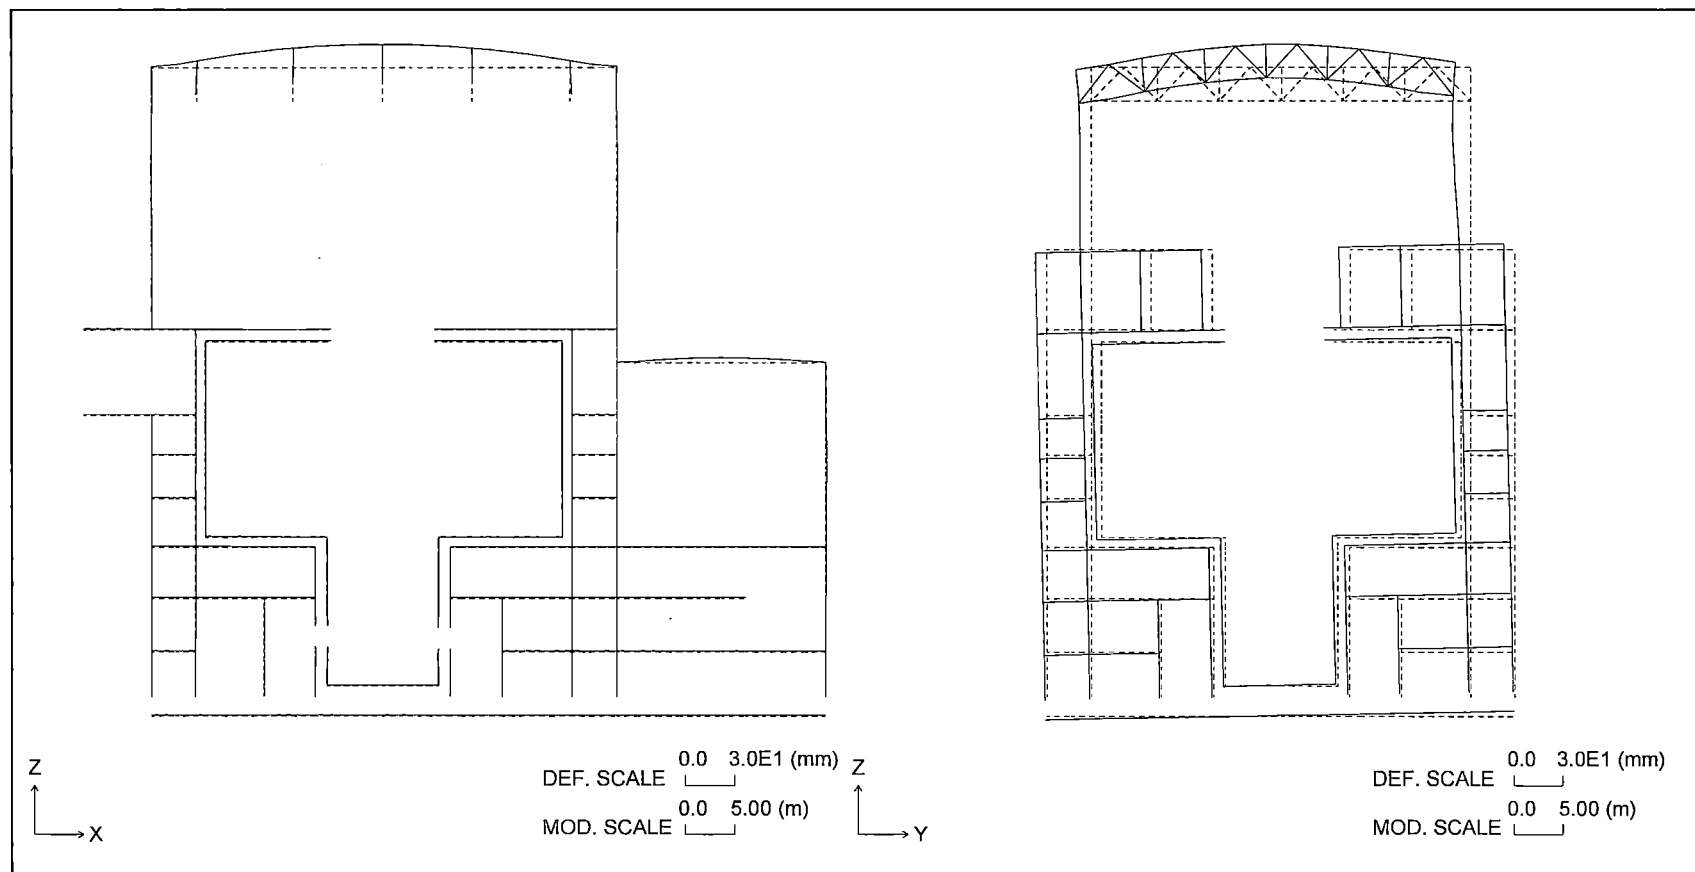


Figure 6.2.4-21 Section Deformation for Tornado Load (East Wind)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 471

REV. 2

of 543

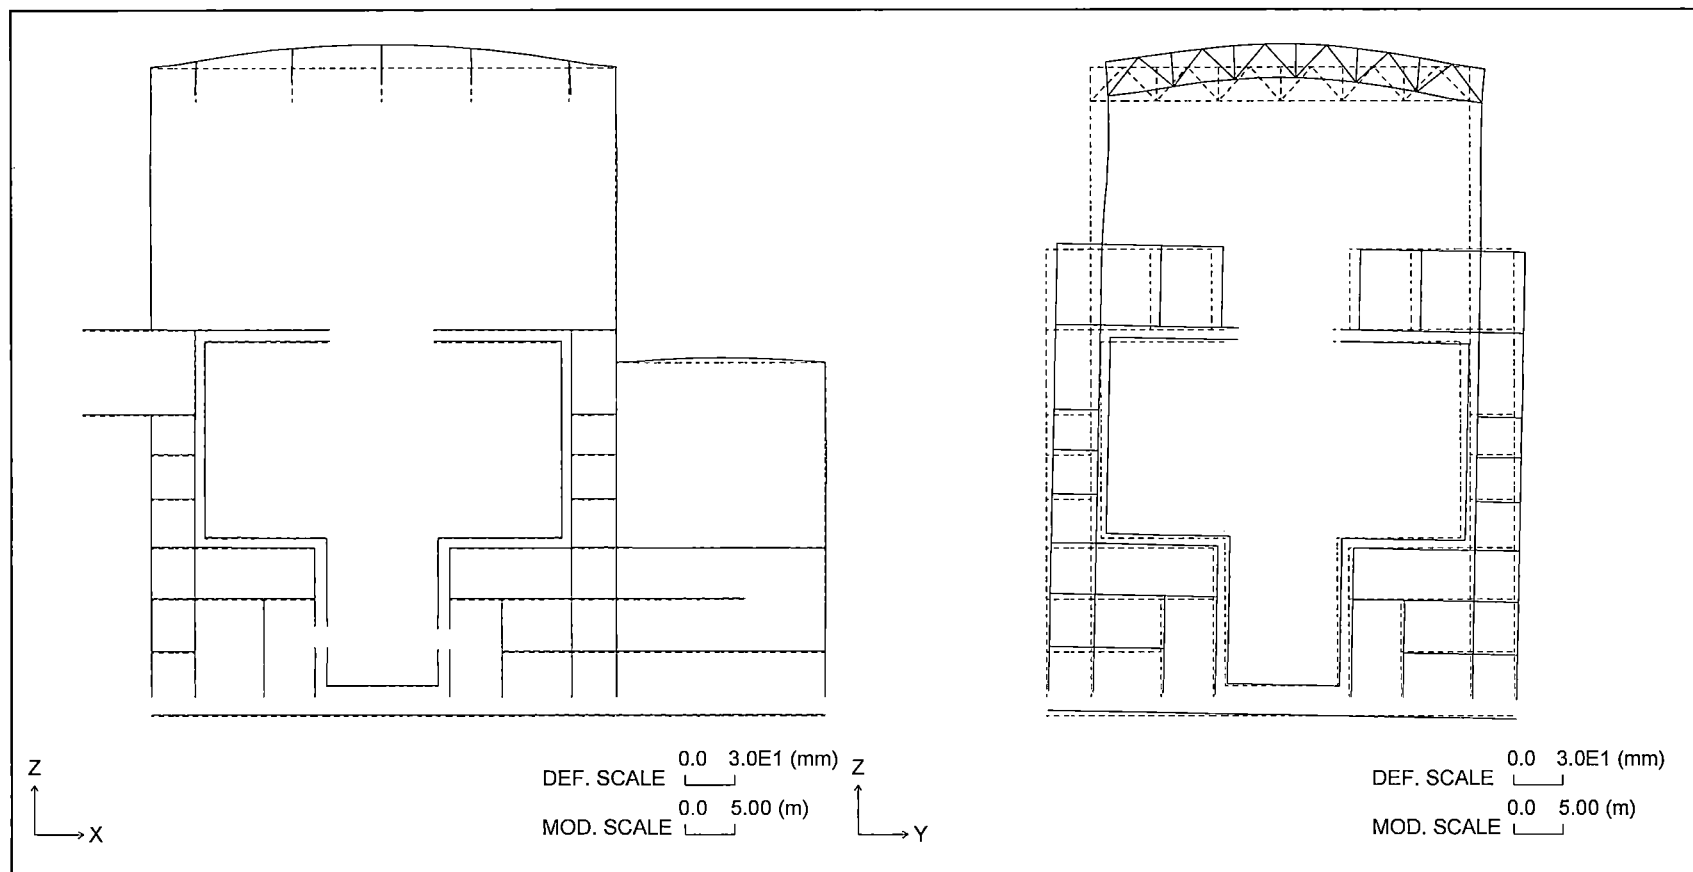


Figure 6.2.4-22 Section Deformation for Tornado Load (West Wind)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 472

REV. 2

of 543

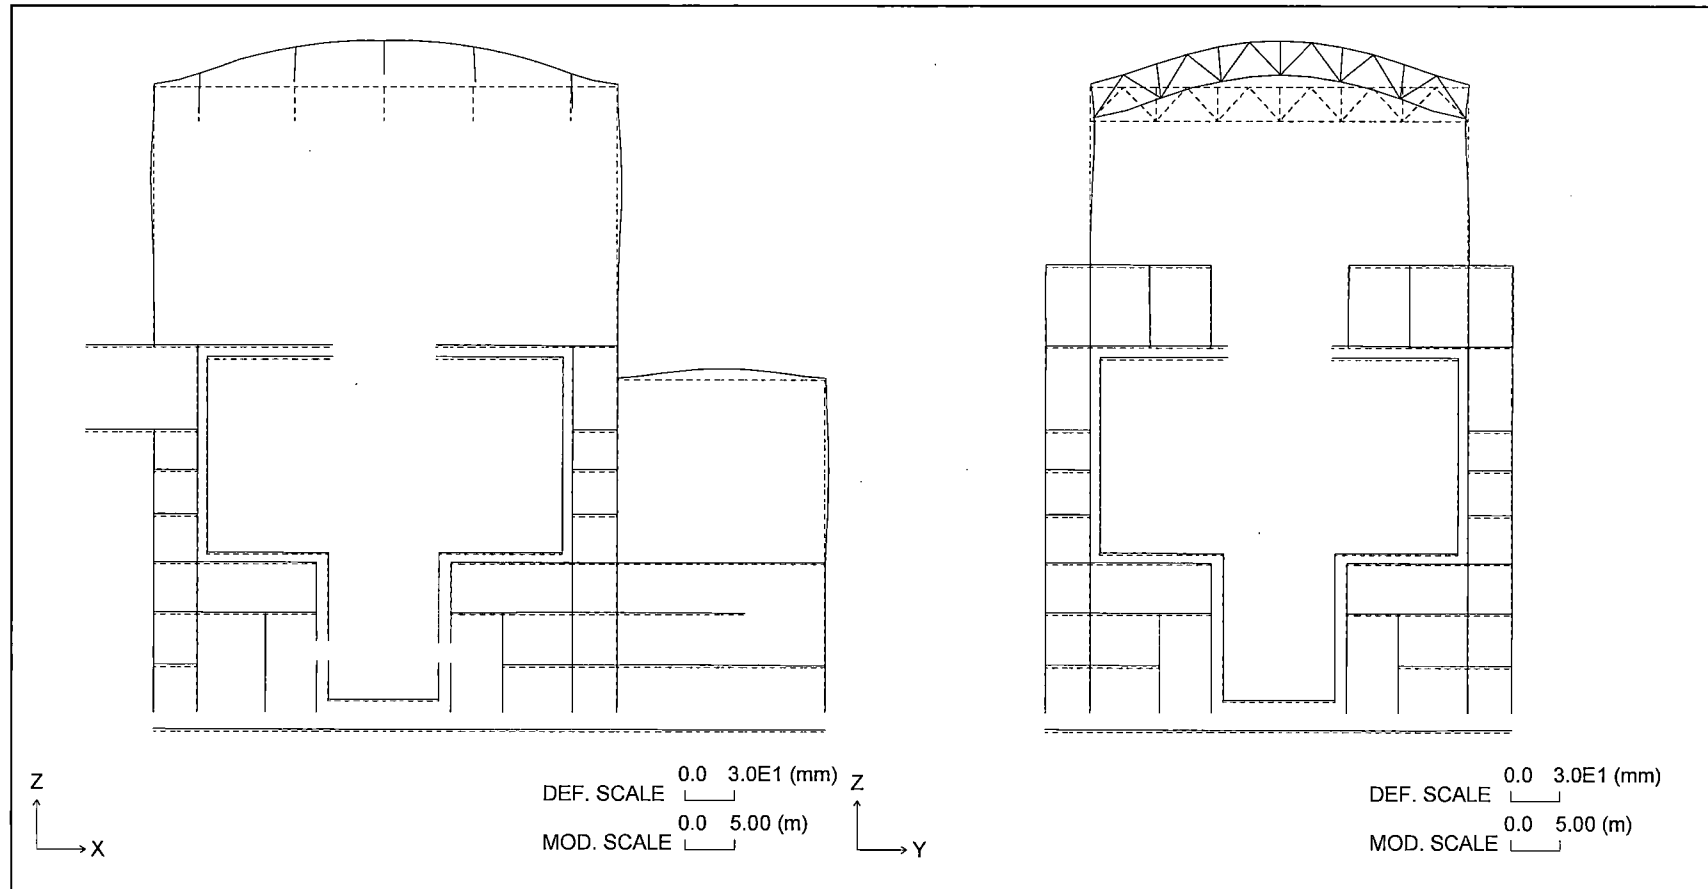


Figure 6.2.4-23 Section Deformation for Tornado Load (Differential Pressure)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 473

REV. 2

of 543

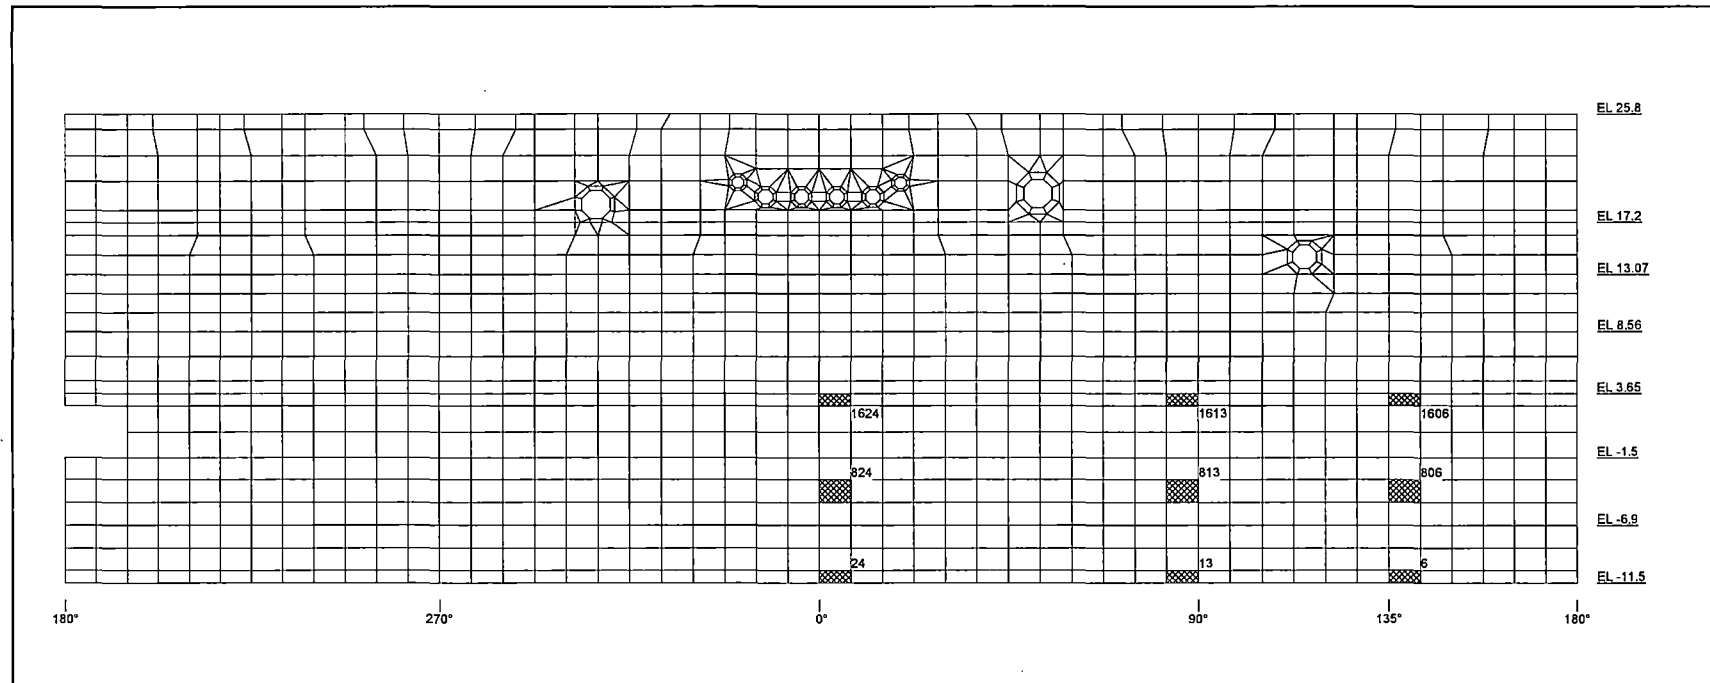


Figure 6.2.4-24 Elements Selected for Tabulation (Wall below RCCV)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 474

REV. 2

of 543

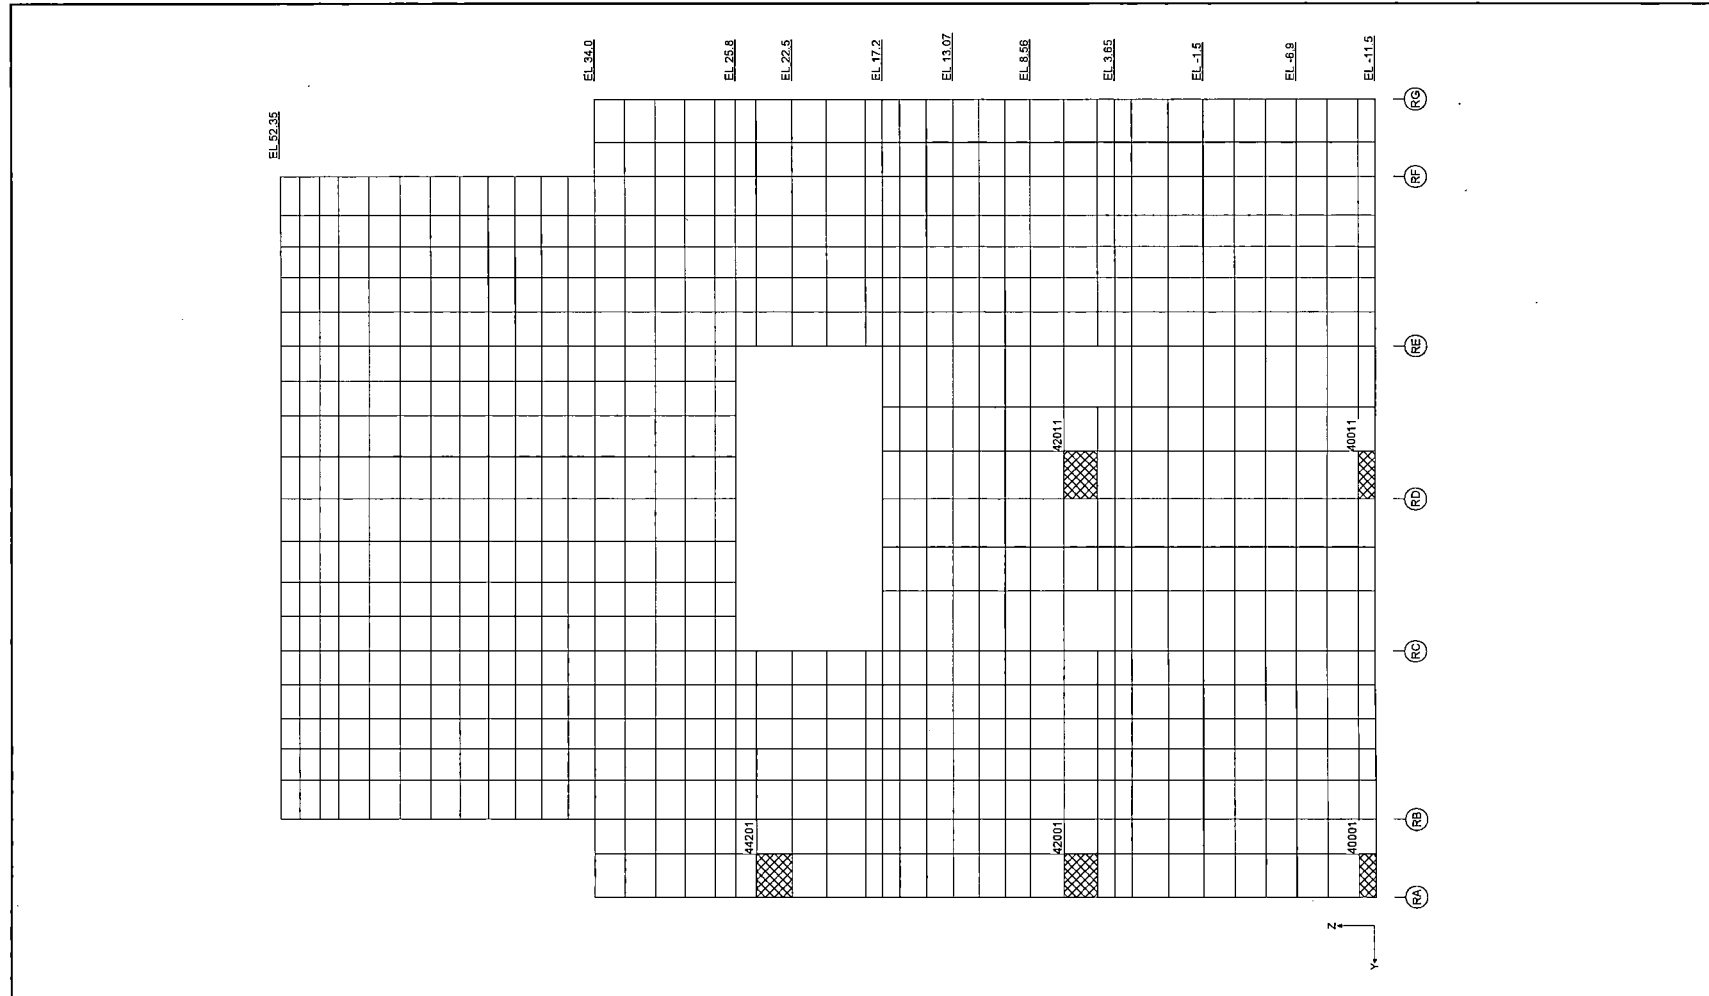


Figure 6.2.4-25 Elements Selected for Tabulation (External Wall R1)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 476

REV. 2

of 543

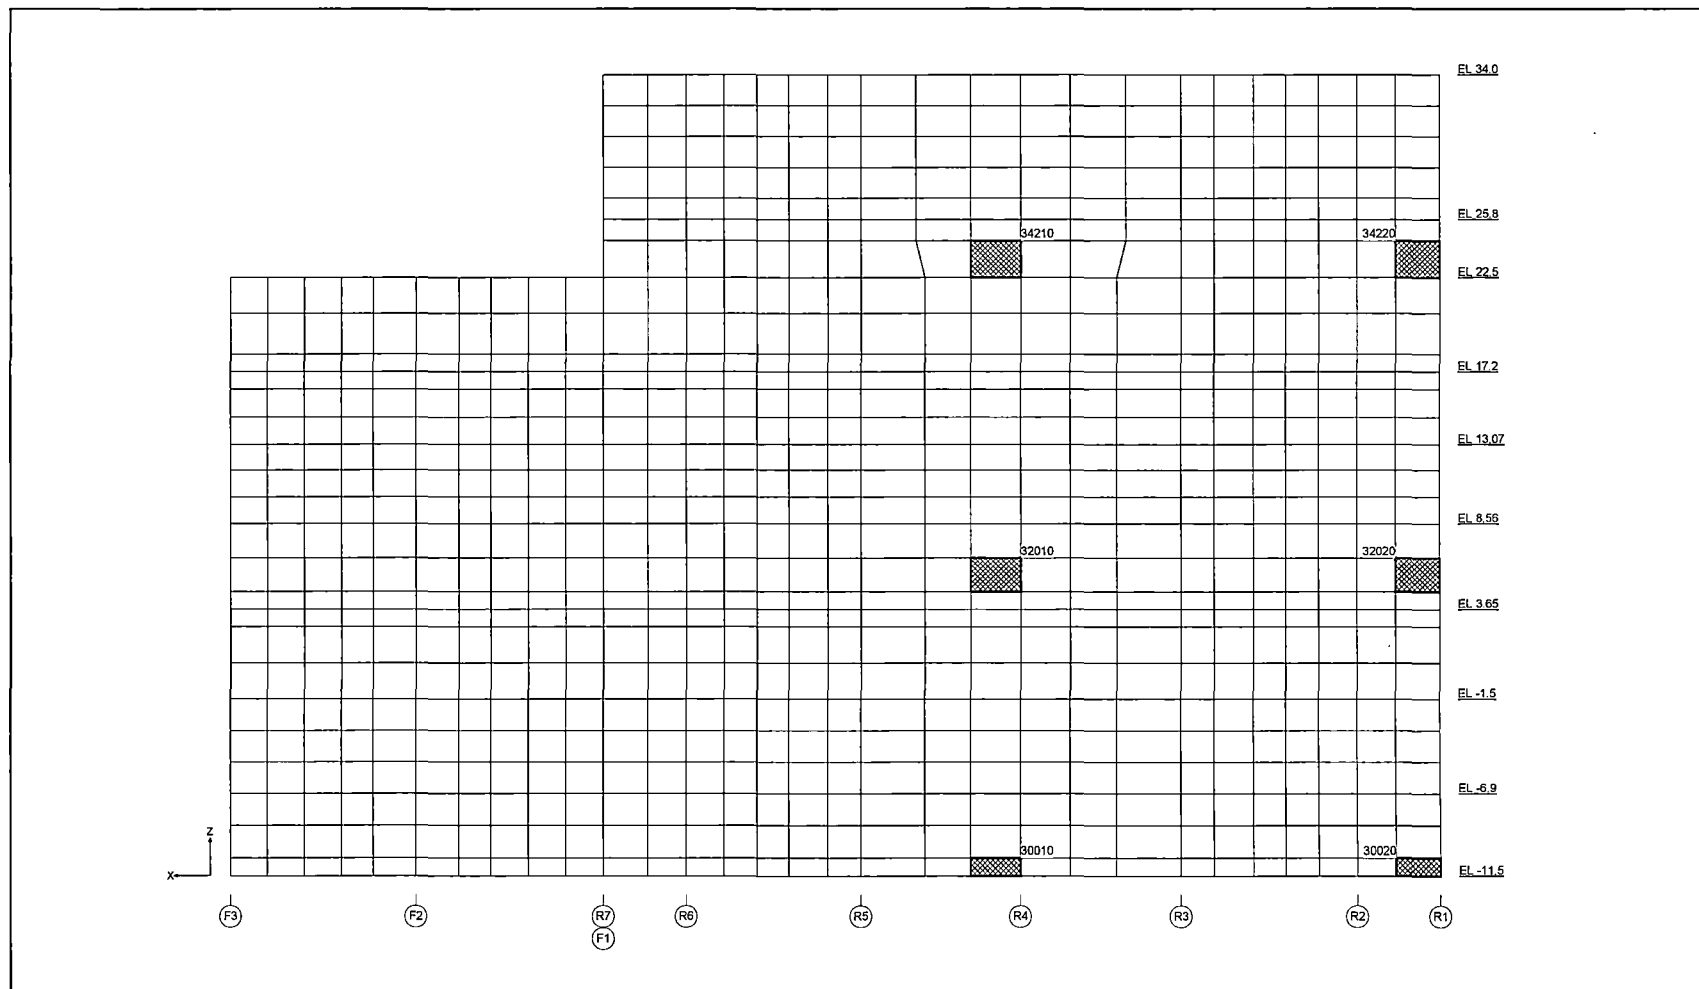


Figure 6.2.4-27 Elements Selected for Tabulation (External Wall RA FA)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 477

REV. 2

of 543

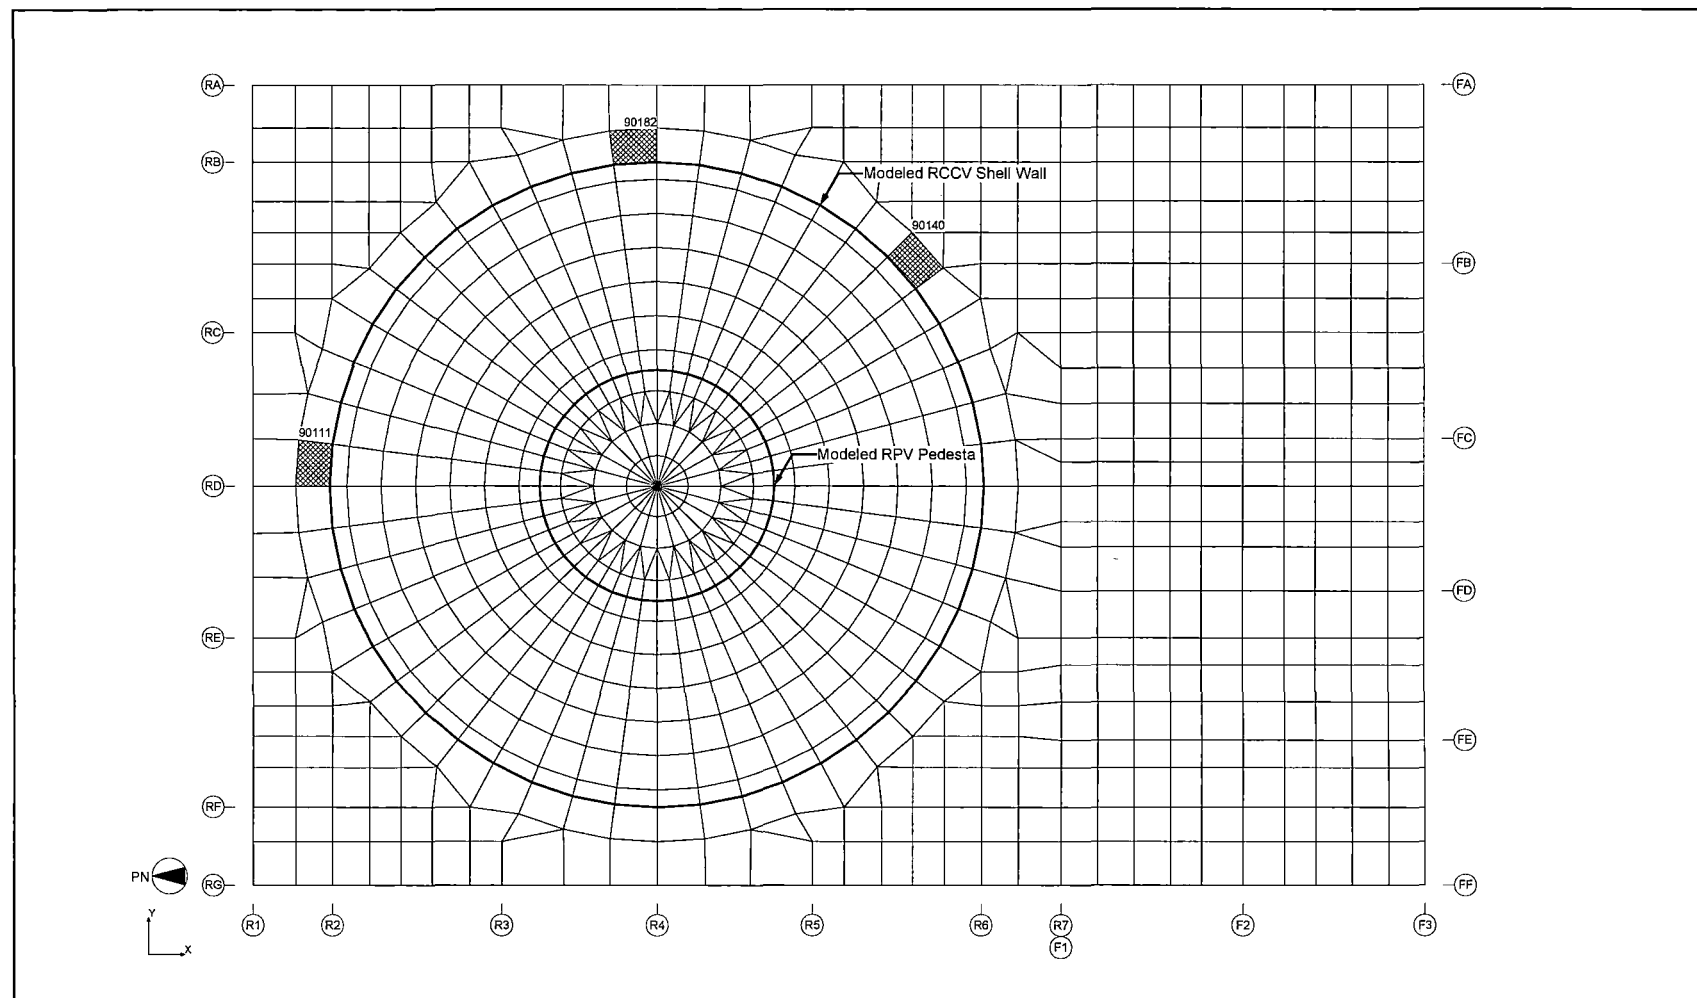


Figure 6.2.4-28 Elements Selected for Tabulation (Basemat)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 478

REV. 2

of 543

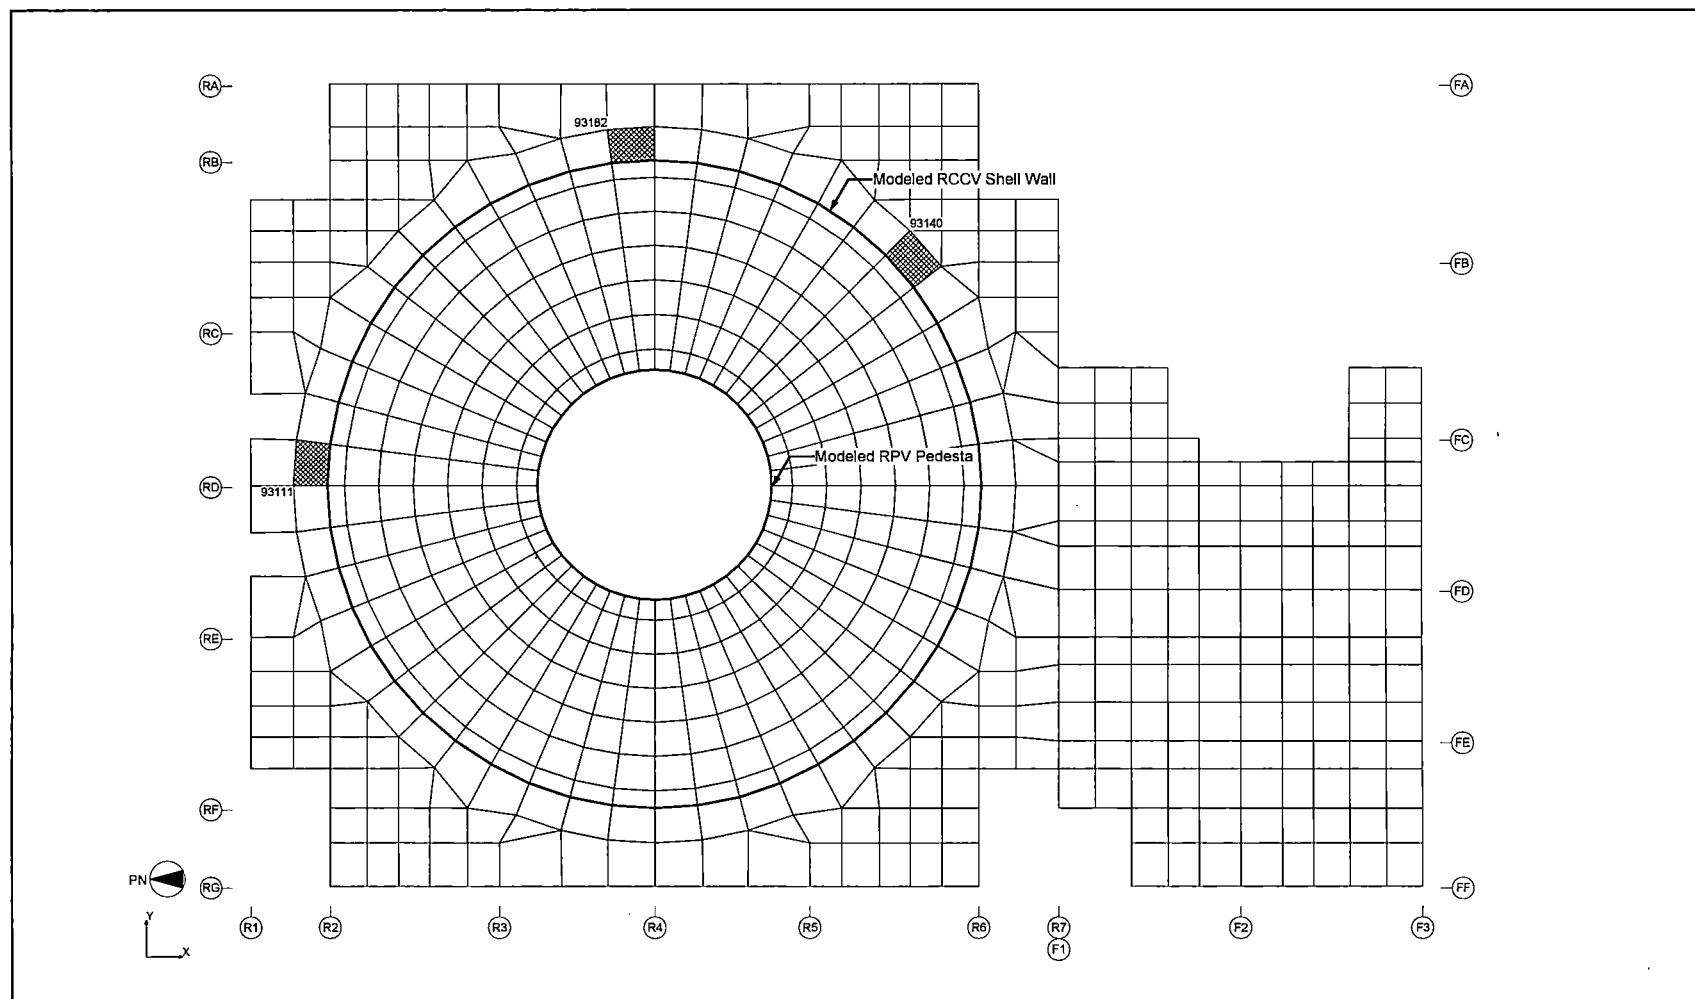


Figure 6.2.4-29 Elements Selected for Tabulation (Slab at EL 4,650)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 479

REV. 2

of 543

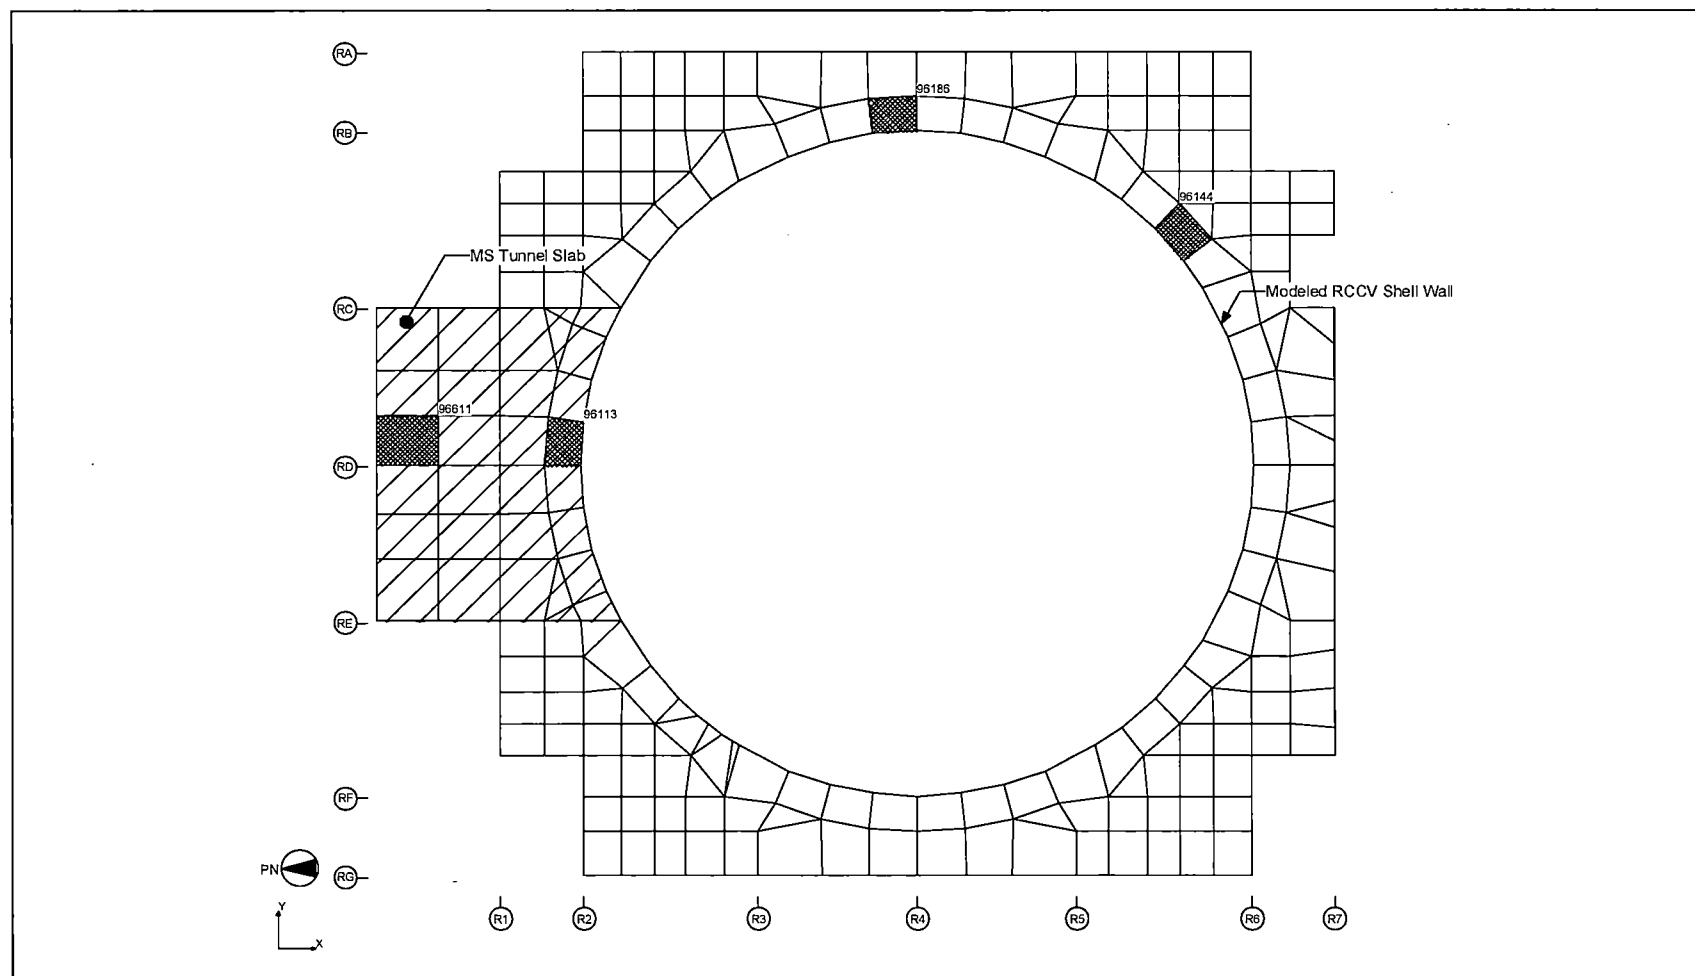


Figure 6.2.4-30 Elements Selected for Tabulation (Slab at EL 17,500)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 480

REV. 2

of 543

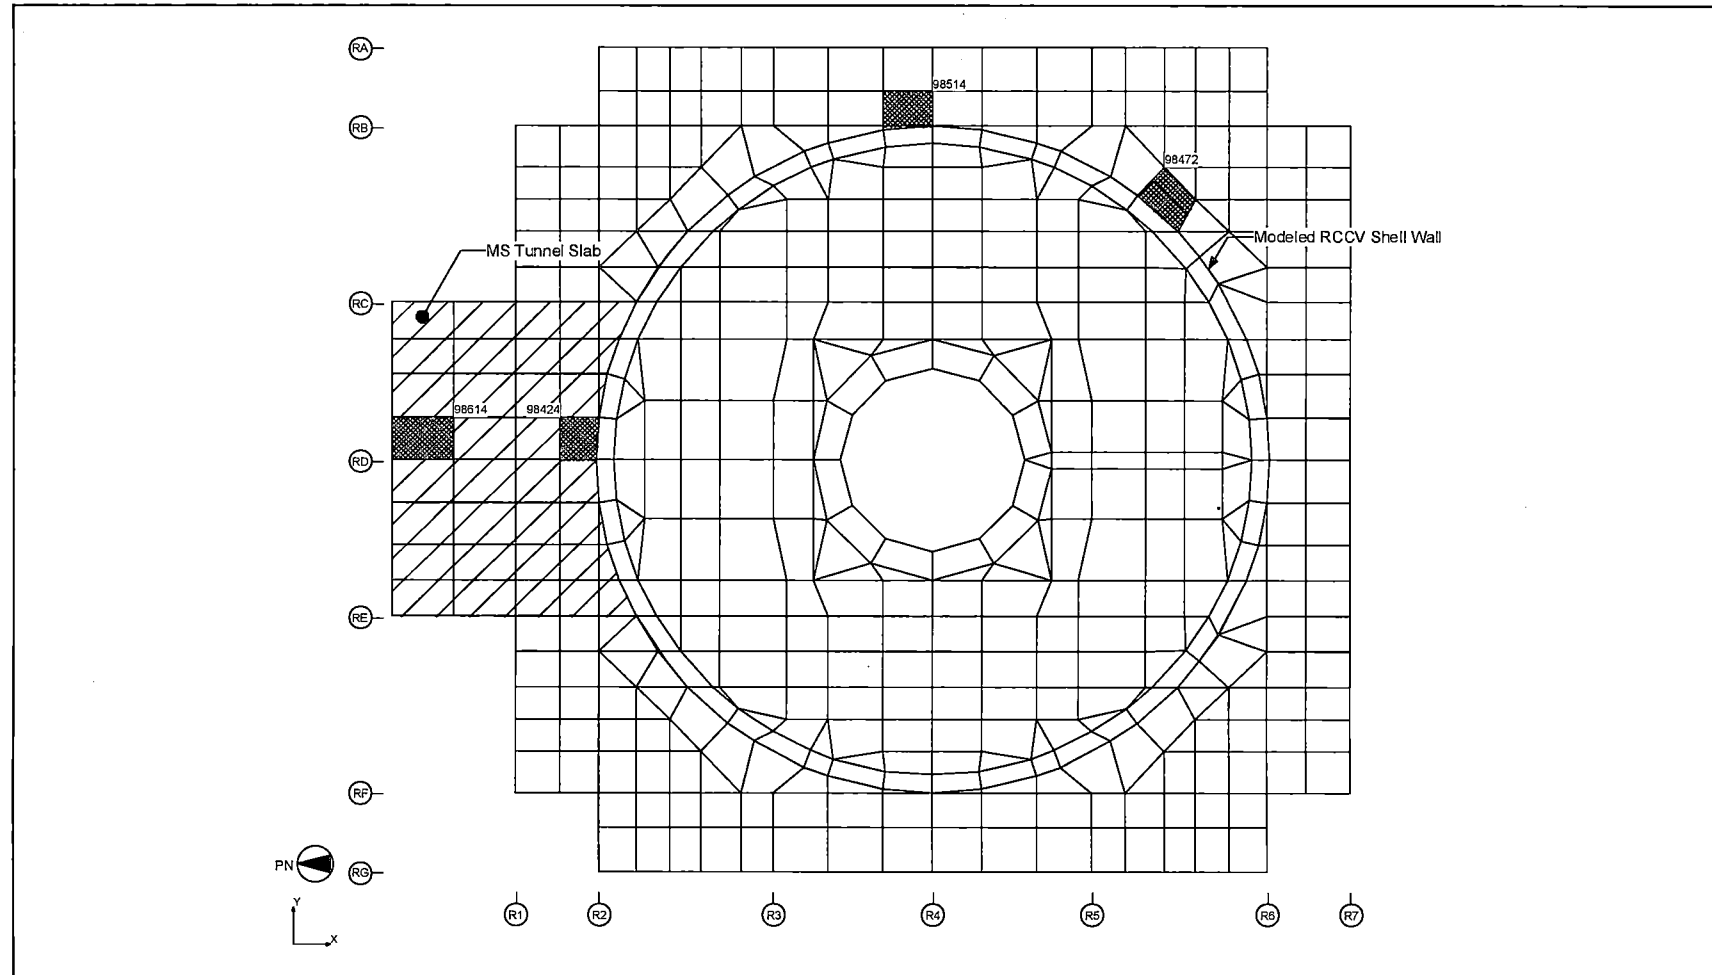


Figure 6.2.4-31 Elements Selected for Tabulation (Slab at EL 27,000)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 481

REV. 2

of 543

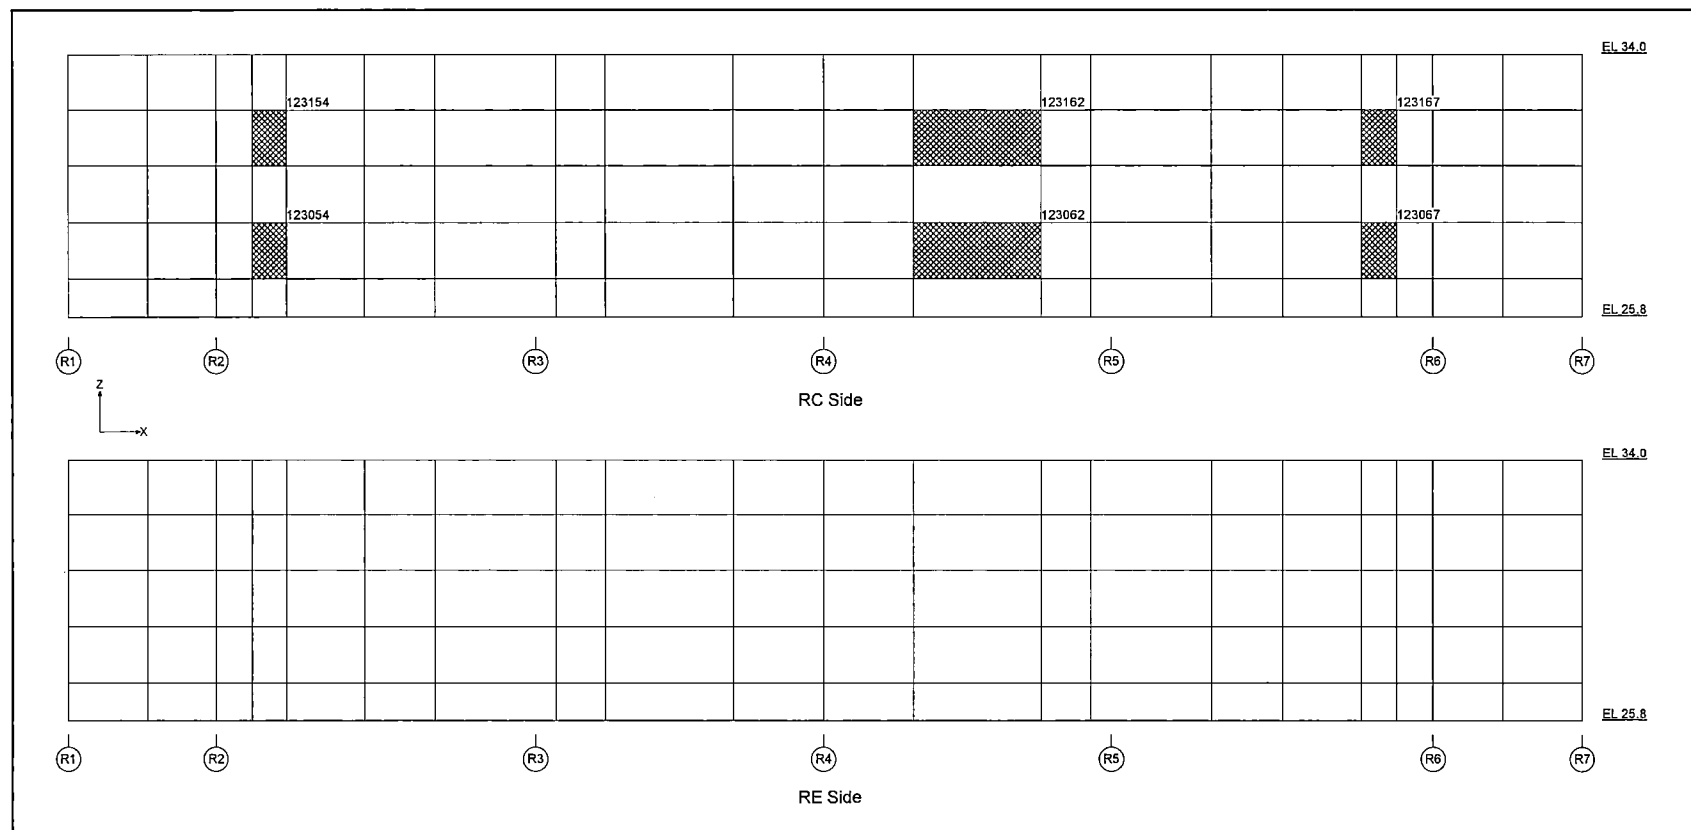


Figure 6.2.4-32 Elements Selected for Tabulation (Pool Girder)



HITACHI

WG3-U71-ERD-S-0004

SH NO. 482

REV. 2

of 543



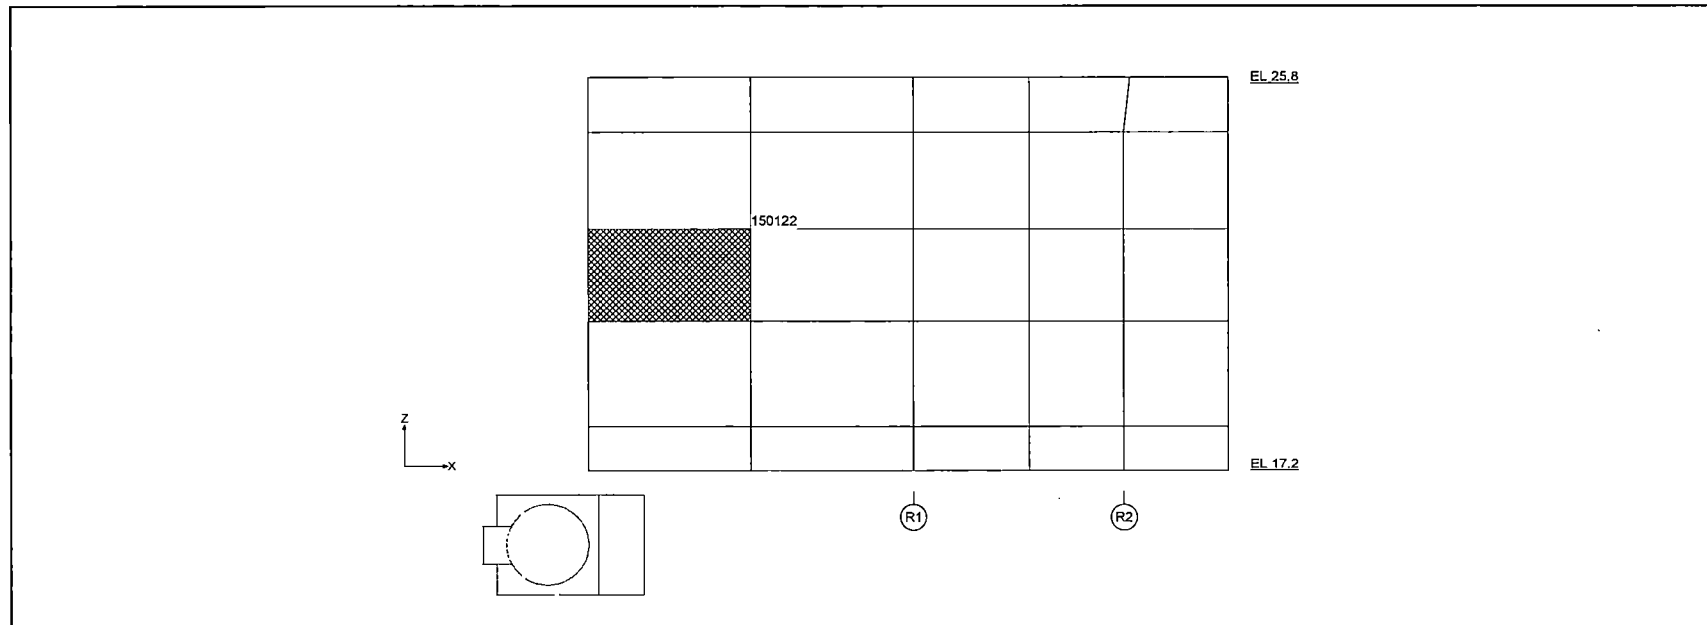


Figure 6.2.4-33 Elements Selected for Tabulation (MS Tunnel Wall)

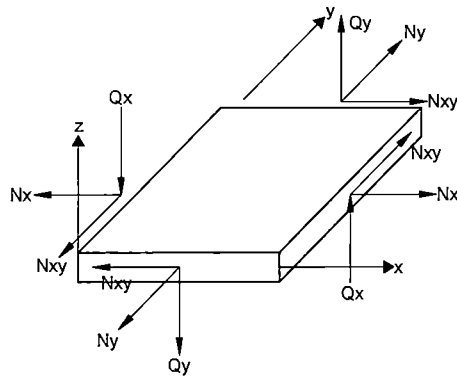

Membrane and Shear Forces

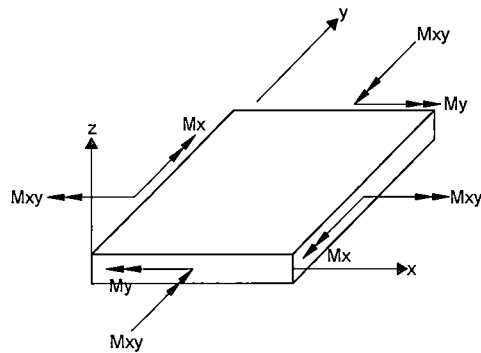

Moments

Definition of Element Coordinate System

Structure	x	y	z
RCCV Wall RPV Pedestal External Wall	horizontal	vertical	outward
Wall in N-S Direction	horizontal	vertical	toward West
Wall in E-W Direction	horizontal	vertical	toward South
Foundation Mat Floor Slab Top Slab	toward South	toward West	downward
Suppression Pool Slab	radial	circumferential	downward

Figure 6.2.4-35 Force and Moment in Shell Element

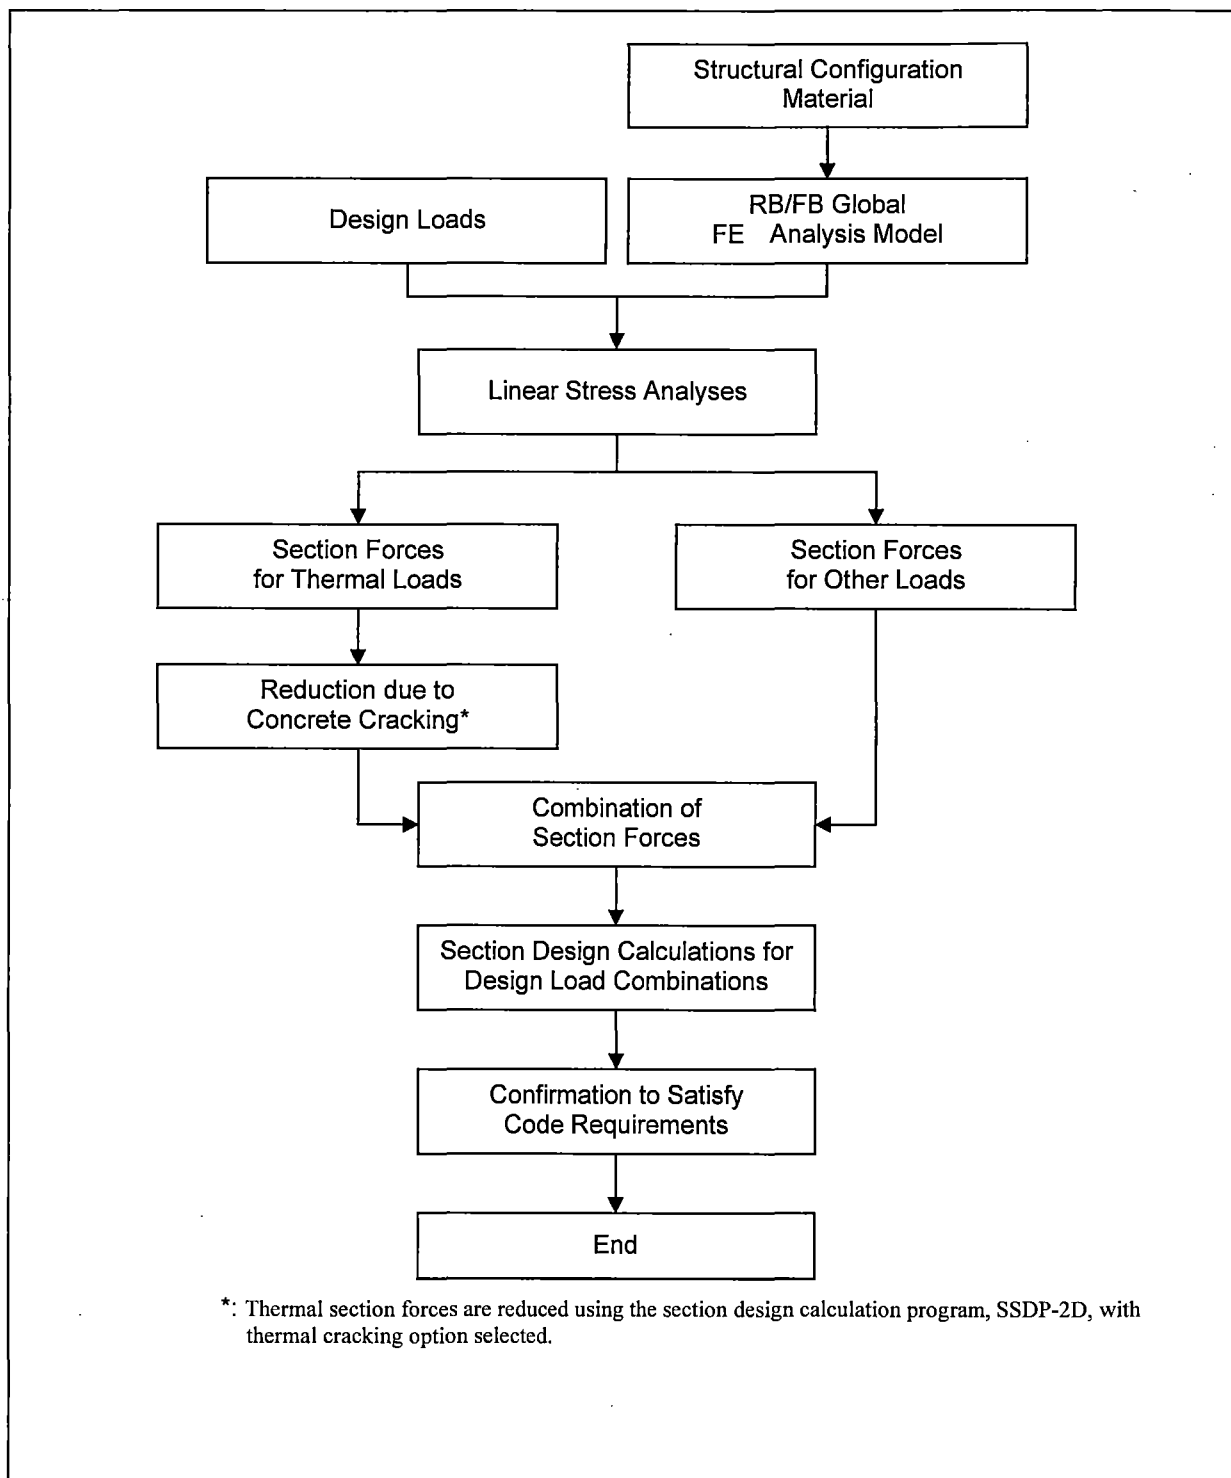


Figure 6.4.1-1 Flow Chart of Design for Reinforced Concrete Structures

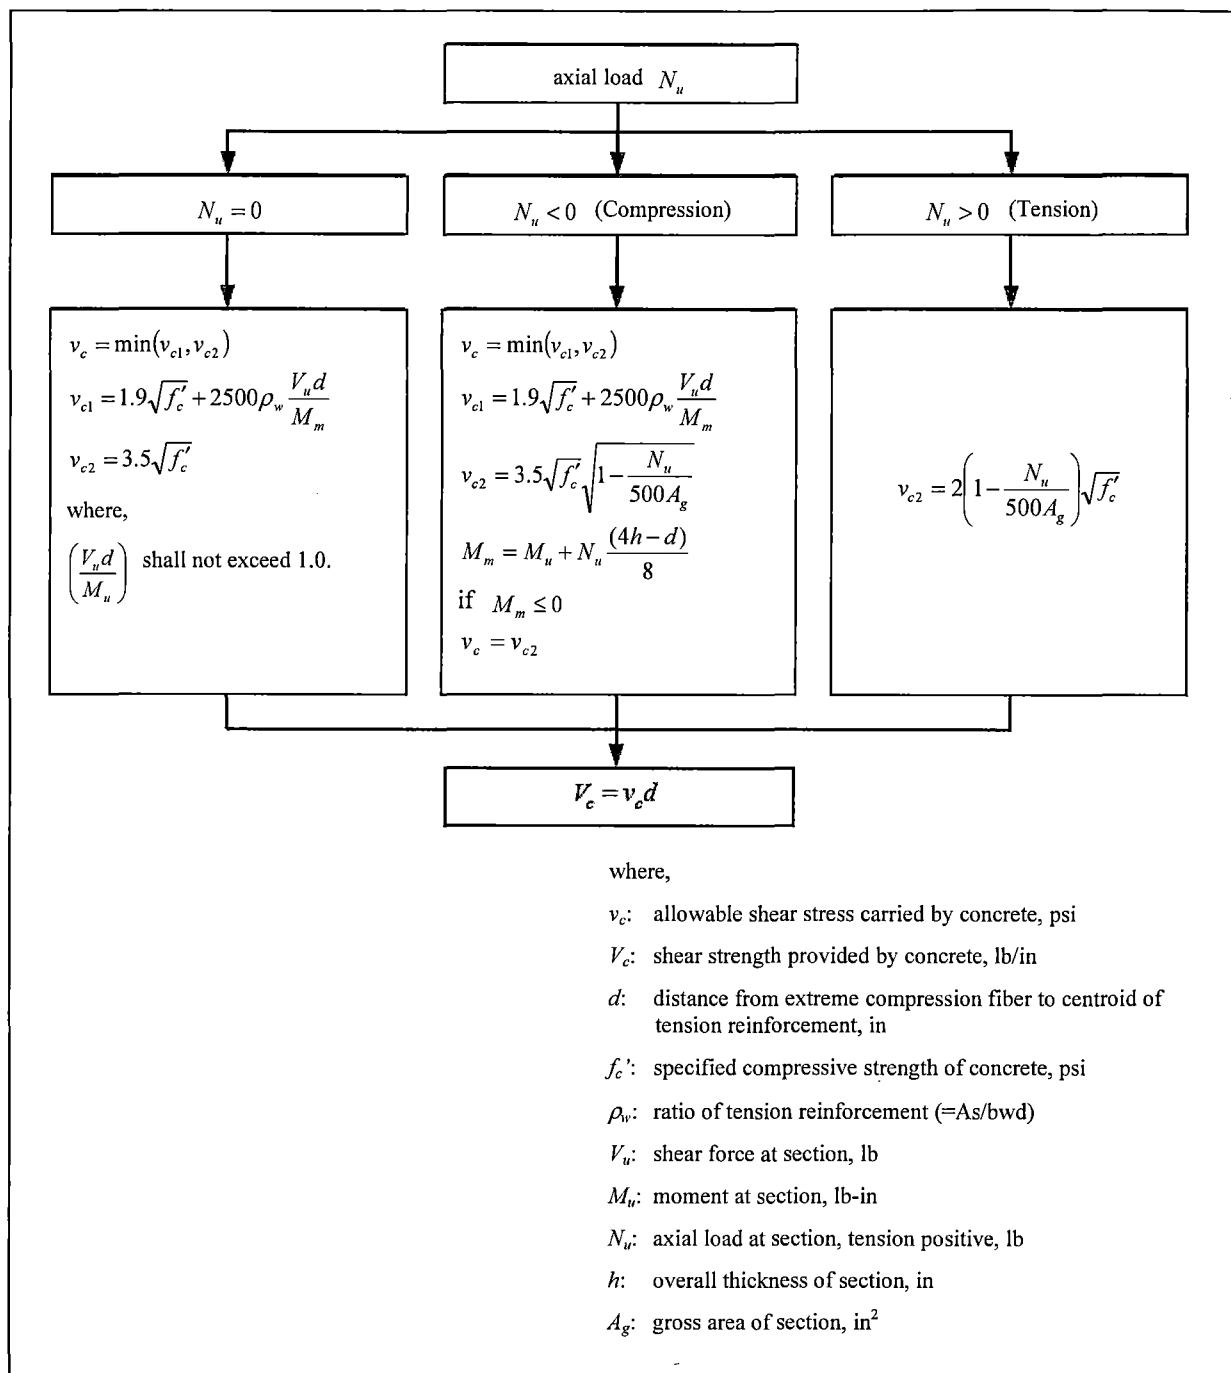


Figure 6.4.1-2 Calculation of Shear Strength Provided by Concrete

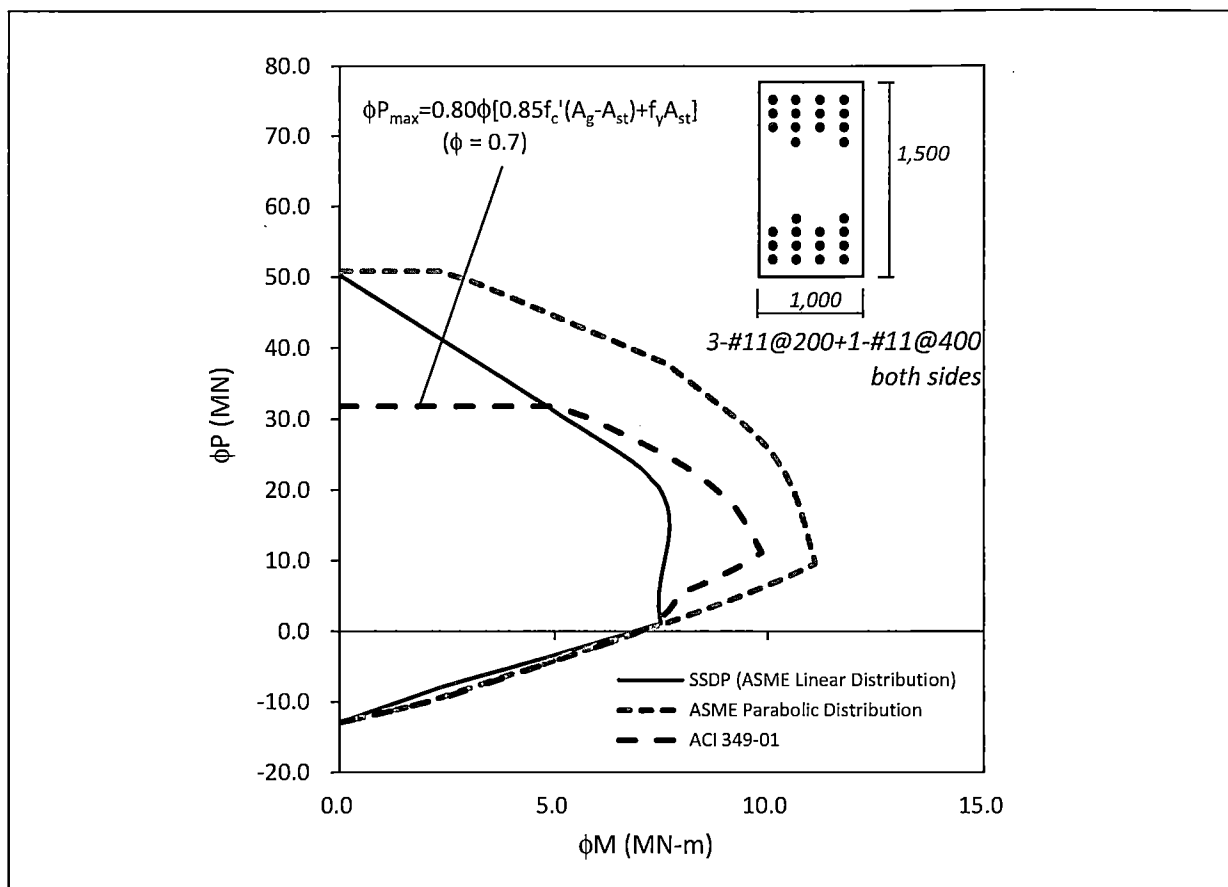


Figure 6.4.1-3 Comparison of Bending Moment-Axial Force (P-M) Interactions

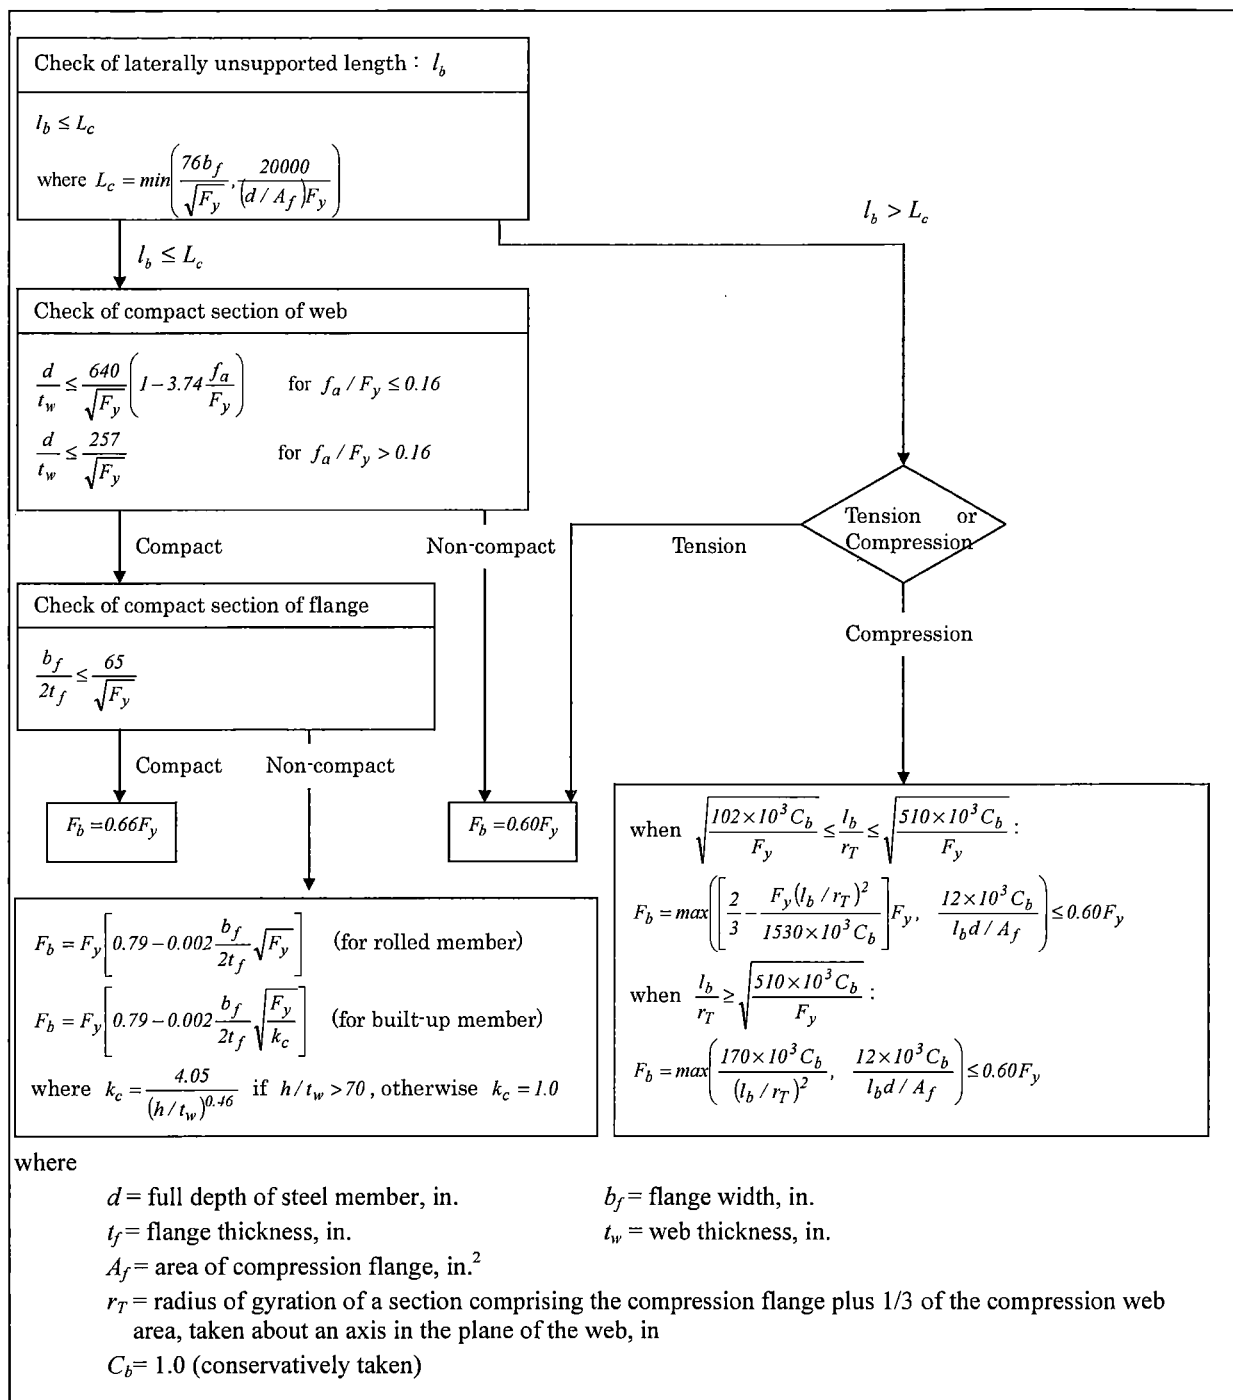
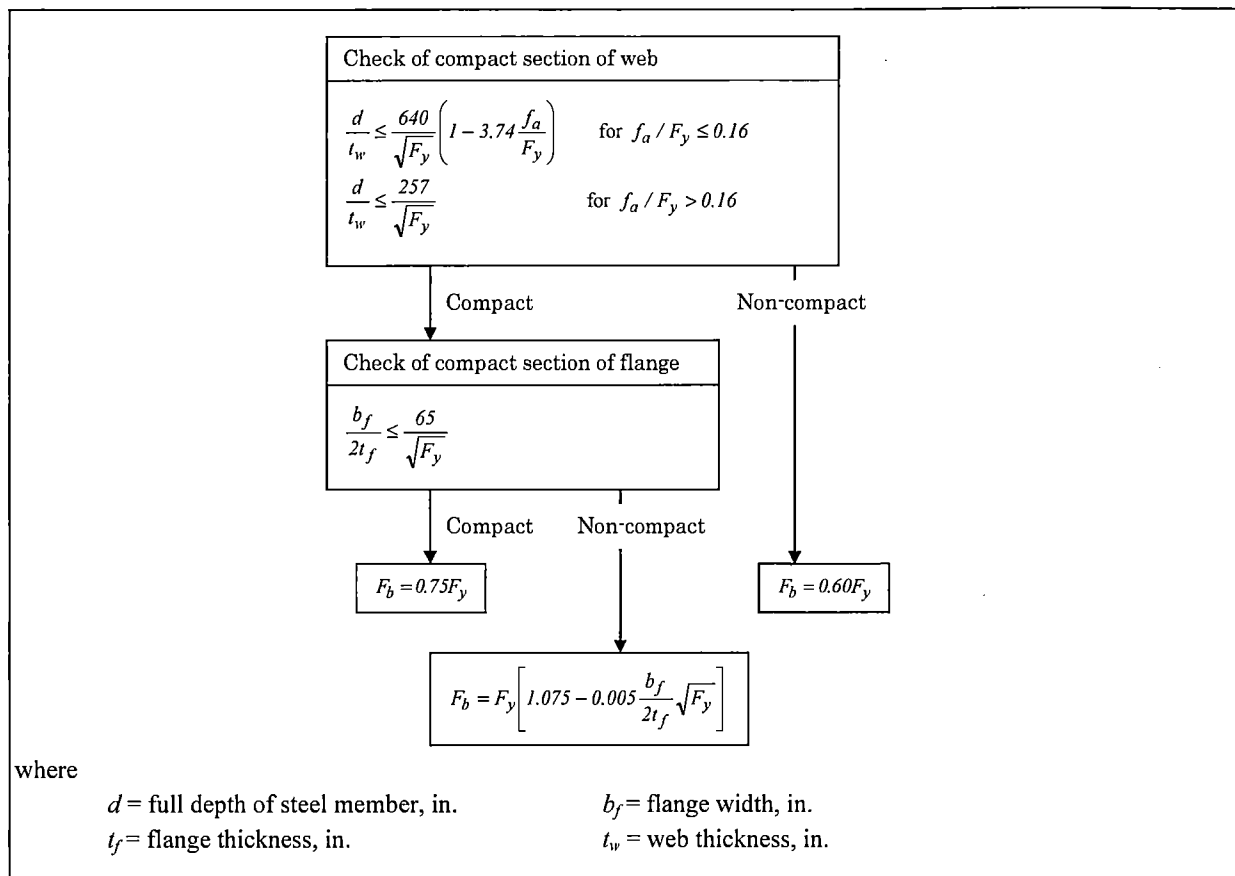


Figure 6.4.2-1 Allowable Stress of W-shaped Members (Strong Axis Bending)

**Figure 6.4.2-2 Allowable Stress of W-shaped Members (Weak Axis Bending)**

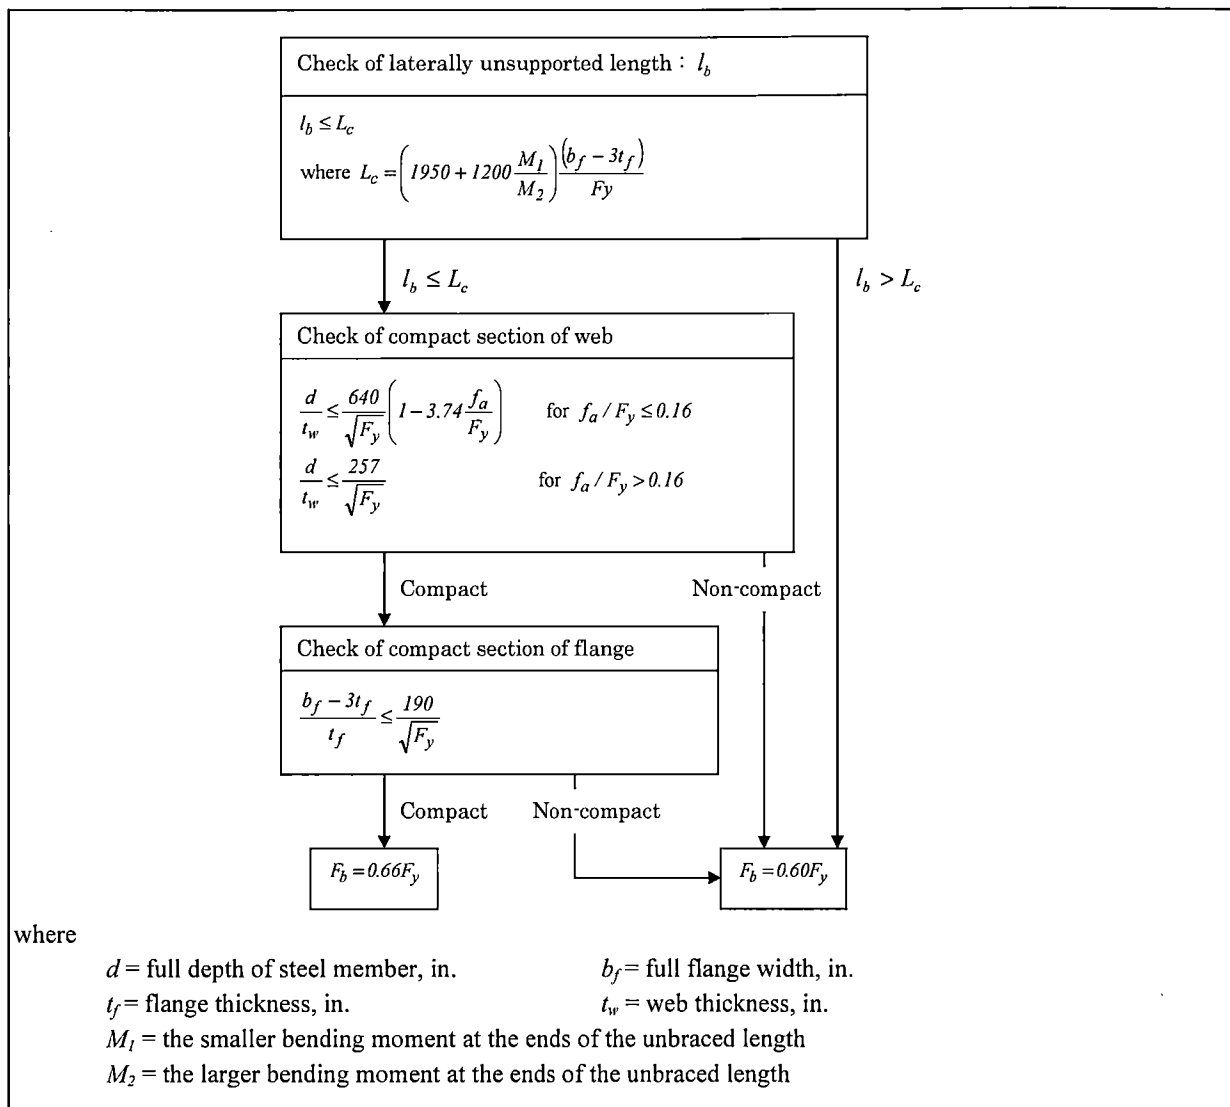


Figure 6.4.2-3 Allowable Bending Stress of Box Members



Figure 7.1-1 Reinforcing Steel of Foundation Mat: Plan





















Figure 7.1-2 Reinforcing Steel of Foundation Mat: Section A-A

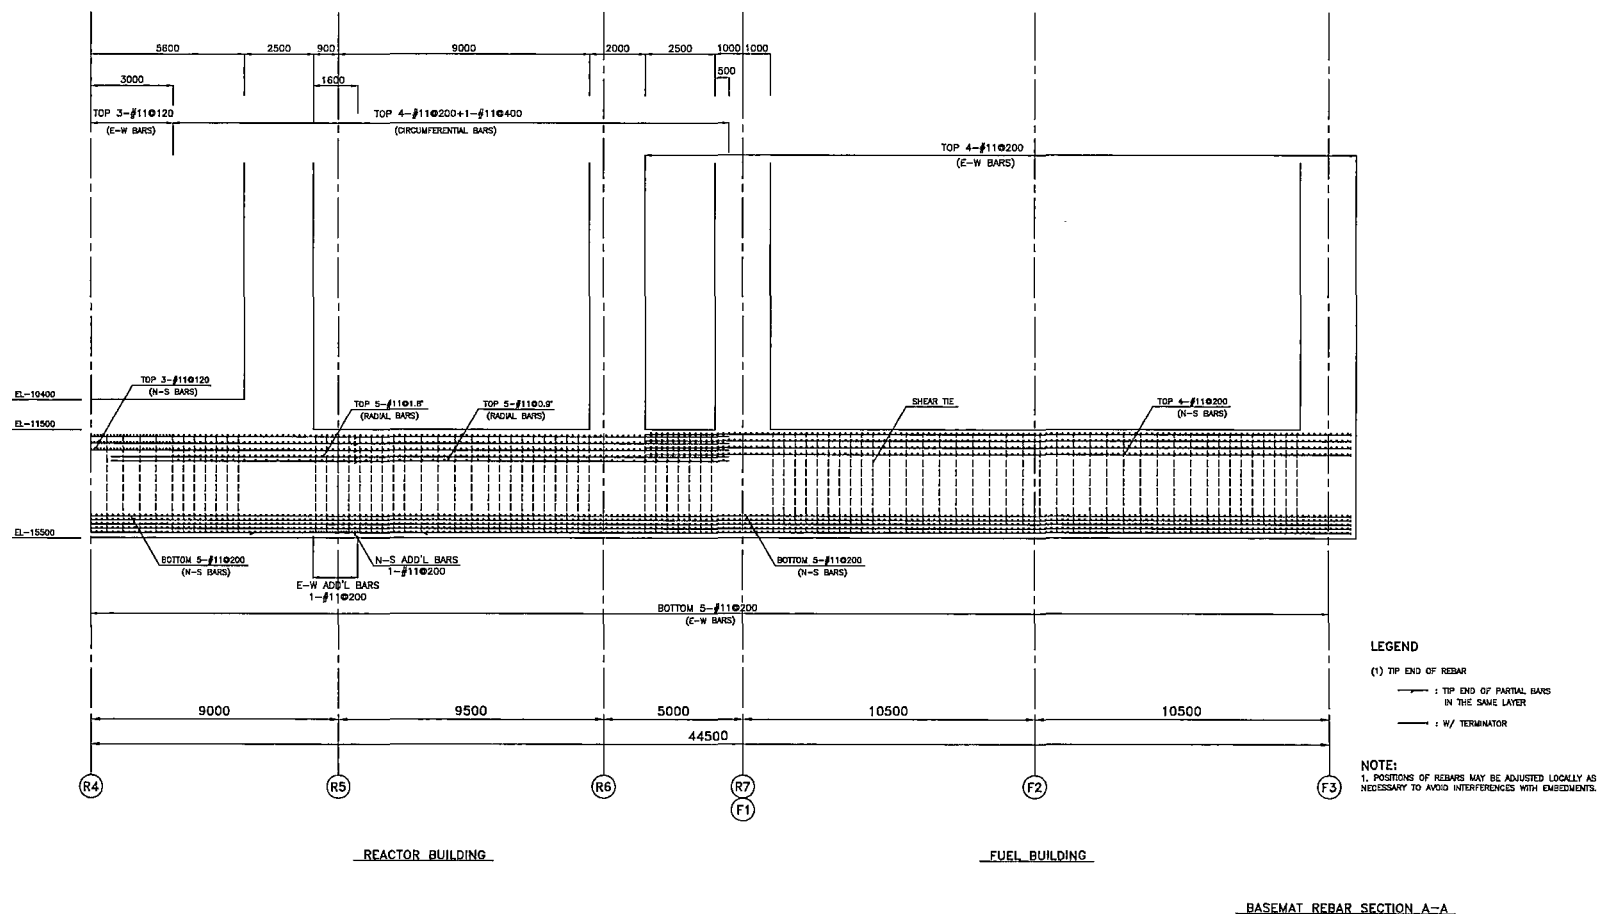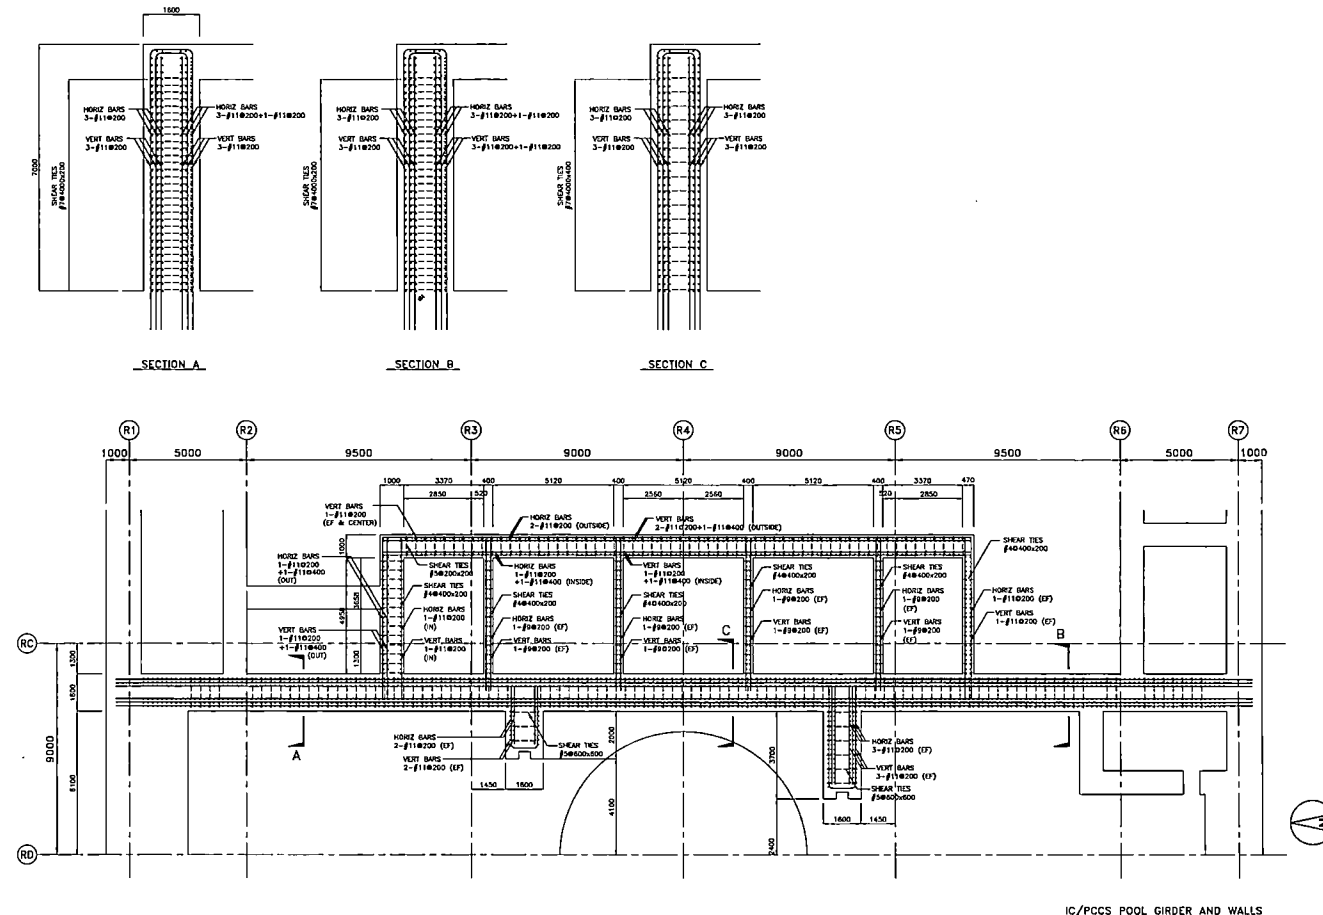


NOTE:
1. POSITIONS OF REBARS MAY BE ADJUSTED LOCALLY AS
NECESSARY TO AVOID INTERFERENCES WITH COMPONENTS.

Figure 7.1-3 Reinforcing Steel of IC/PCCS Pool Girder

RB SEISMIC WALLS REINFORCING SCHEDULE EL-11500 - EL-34000				
TYPE	OWN			
EL 3200 + EL 3400	SECTION			
	VERT BAR	2-#11 @200 (EF)		
	HORIZ BAR	2-#11 @200 (EF)		
	SHEAR TIE	#5 @400x400		
EL 3400 + EL 3700	TYPE	OWN1	OWN2	OWN3
	SECTION			
	VERT BAR	3-#11 @200 (OUT) 3-#11 @200 (IN)	4-#11 @200 (OUT) 3-#11 @200 (IN)	5-#11 @200 (OUT) 3-#11 @200 (IN)
	HORIZ BAR	3-#11 @200 (OUT) 3-#11 @200 (IN)	4-#11 @200 (OUT) 3-#11 @200 (IN)	5-#11 @200 (OUT) 3-#11 @200 (IN)
EL 3700 + EL 4850	TYPE	OWN1	OWN2	OWN3
	SECTION			
	VERT BAR	3-#11 @200 (EF)	4-#11 @200 (OUT) 3-#11 @200 (IN)	4-#11 @200 (EF)
	HORIZ BAR	3-#11 @200 (EF)	4-#11 @200 (OUT) 3-#11 @200 (IN)	3-#11 @200 (EF)
EL 4850 + EL 11500	TYPE	OWN1	OWN2	OWN3
	SECTION			
	VERT BAR	3-#11 @100-1-#11 @200 (OUT) 2-#11 @100-2-#11 @200 (IN)	3-#11 @100-2-#11 @200 (EF)	5-#11 @200 (EF)
	HORIZ BAR	2-#11 @100-3-#11 @200 (OUT) 1-#11 @100-3-#11 @200 (IN)	2-#11 @100-2-#11 @200 (OUT) 1-#11 @100-3-#11 @200 (IN)	4-#11 @200-1-#11 @400 (EF)
EL 4850 + EL 11500	TYPE	OWN1	OWN2	OWN3
	SECTION			
	VERT BAR	3-#11 @100-1-#11 @200 (OUT) 2-#11 @100-2-#11 @200 (IN)	3-#11 @100-2-#11 @200 (EF)	5-#11 @200 (EF)
	HORIZ BAR	2-#11 @100-3-#11 @200 (OUT) 1-#11 @100-3-#11 @200 (IN)	2-#11 @100-2-#11 @200 (OUT) 1-#11 @100-3-#11 @200 (IN)	4-#11 @200-1-#11 @400 (EF)
EL 4850 + EL 11500	TYPE	OWN1	OWN2	OWN3
	SECTION			
	VERT BAR	3-#11 @100-1-#11 @200 (OUT) 2-#11 @100-2-#11 @200 (IN)	3-#11 @100-2-#11 @200 (EF)	5-#11 @200 (EF)
	HORIZ BAR	2-#11 @100-3-#11 @200 (OUT) 1-#11 @100-3-#11 @200 (IN)	2-#11 @100-2-#11 @200 (OUT) 1-#11 @100-3-#11 @200 (IN)	4-#11 @200-1-#11 @400 (EF)

Note: Updated reinforcement arrangements from standard design are shown in cloud mark.

MS TUNNEL WALL REINFORCING SCHEDULE		
EL 17500	TYPE	QW
	SECTION	
	VERT BAR	2-#11 @200 (IN)
	HORIZ BAR	2-#11 @200 (IN)
	SHEAR TIE	#5 @400x400






SLAB REINFORCING SCHEDULE			
TYPE	OWN	OWN	OWN
EL 27000	SECTION		
	TOP	3-#11 @200-2-#11 @200 (EW)	4-#11 @200 (EW)
	BOTTOM	2-#11 @100 (EW)	4-#11 @200 (EW)
	SHEAR TIE	#5 @200x200	#5 @200x200
EL 17500	SECTION		
	TOP	2-#11 @200 (EW)	2-#11 @200 (EW)
	BOTTOM	2-#11 @200 (EW)	3-#11 @200 (EW)
	SHEAR TIE	#5 @200x200	#5 @200x200
EL 4850	SECTION		
	TOP	3-#11 @200 (EW)	
	BOTTOM	3-#11 @200 (EW)	
	SHEAR TIE	#5 @200x200	

Figure 7.1-4 List of RB Wall and Slab Reinforcement

{{{Contains Security-Related Information – Withheld Under 10 CFR 2.390.}}}



HITACHI

WG3-U71-ERD-S-0004

SH NO. 495

REV. 2

of 543

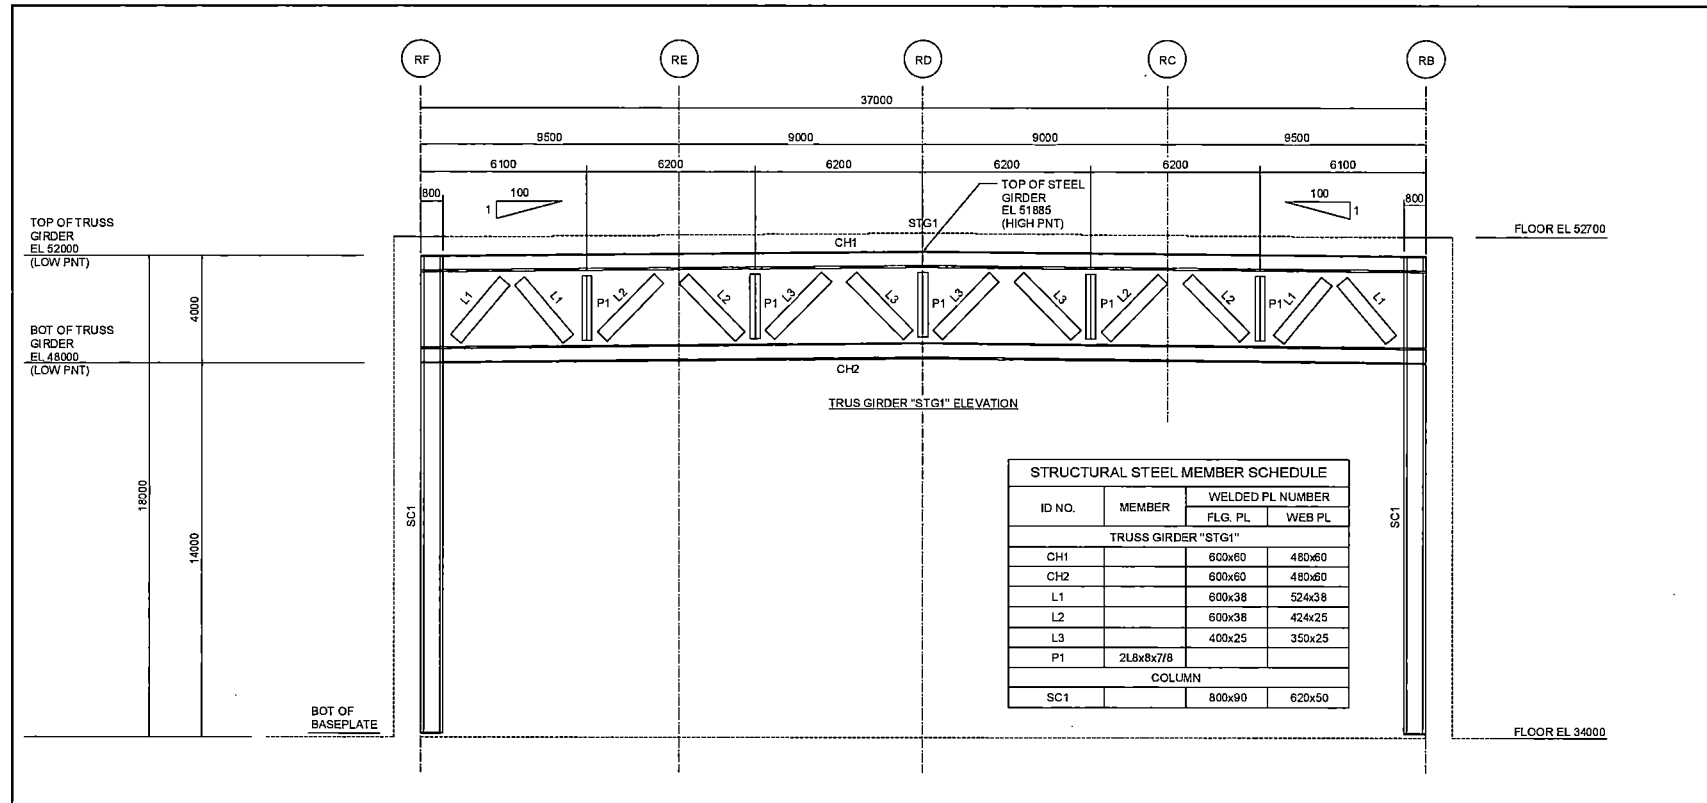


Figure 7.1-5 RB Roof Truss Structural Steel Member



HITACHI

WG3-U71-ERD-S-0004

SH NO. 496

REV. 2

of 543

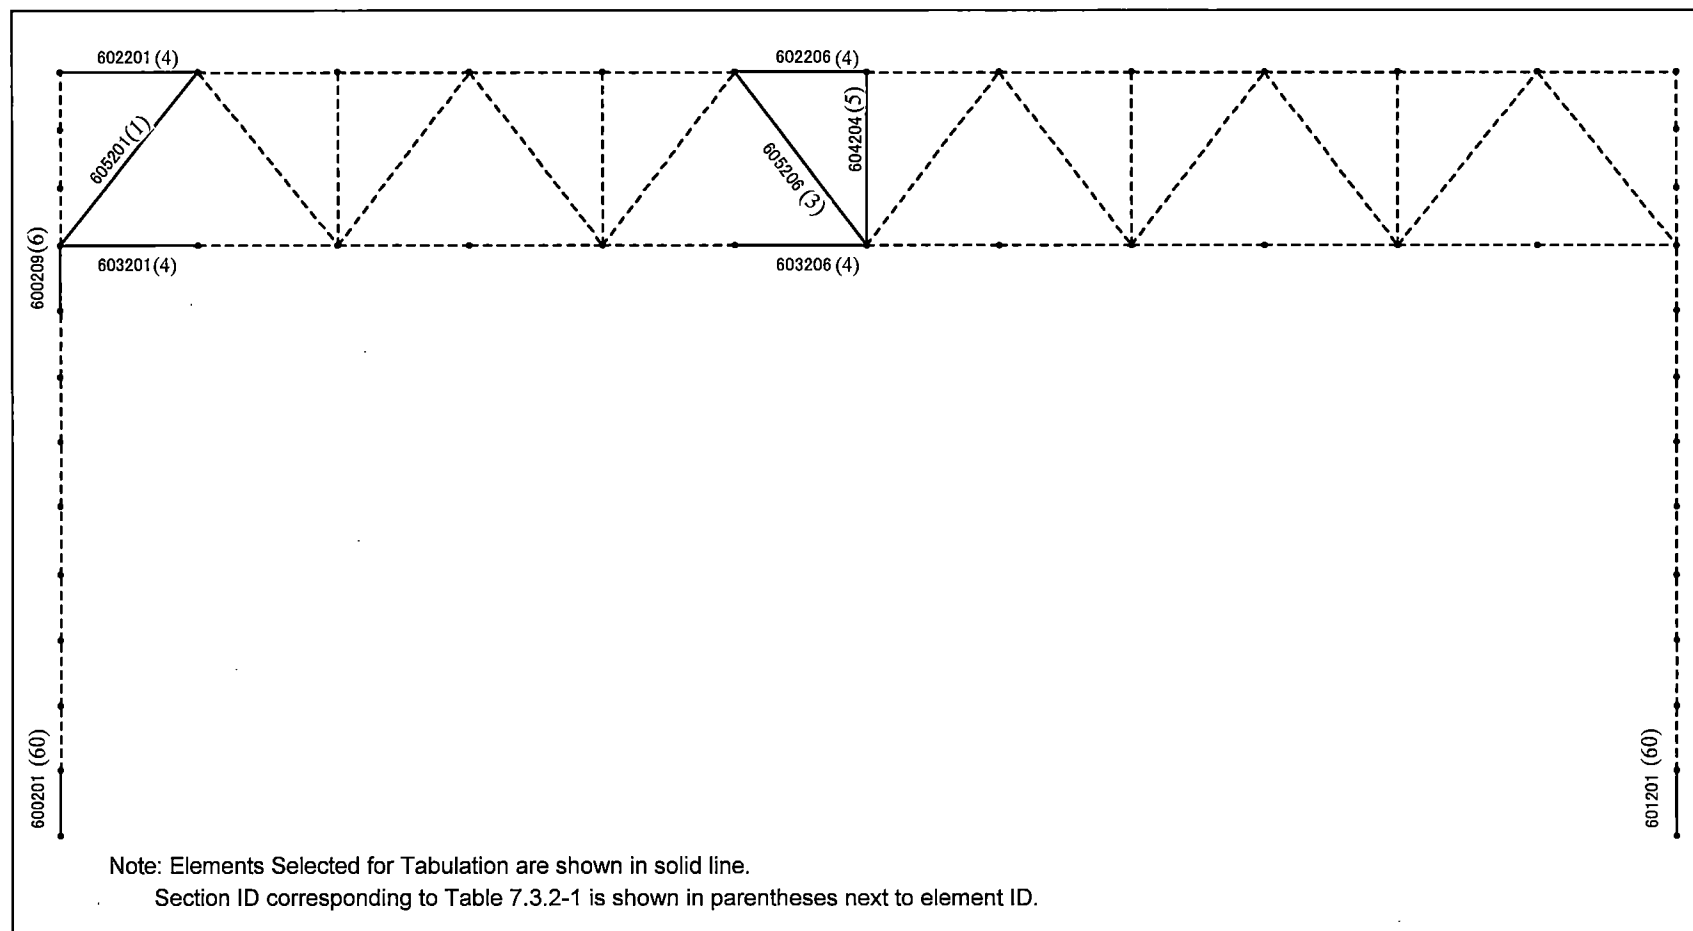


Figure 7.3.2-1 Elements Selected for Tabulation - RB Roof Truss and Supporting Column on R4 Column Line



HITACHI

WG3-U71-ERD-S-0004	SH NO. 497
REV. 2	of 543

APPENDIX A

COMPARISON WITH DCD DATA

**List of Tables**

Table A.1-1 Design Seismic Shear Loads for Horizontal.....	499
Table A.1-2 Design Seismic Moment Loads for Horizontal	504
Table A.1-3 Design Seismic Torsion Loads for Horizontal	509
Table A.1-4 Vertical Acceleration.....	513
Table A.1-5 Soil Pressure Due to an Earthquake	517
Table A.1-6 Seismic Hydrodynamic Loads for GDCS Pool	518
Table A.1-7 Seismic Hydrodynamic Loads for RPV Cavity / Dryer Separator / Fuel Buffer Pool	519
Table A.1-8 Seismic Hydrodynamic Loads for IC / PCCS Pool.....	520
Table A.1-9 Seismic Hydrodynamic Loads for Extension Pool A	521
Table A.1-10 Seismic Hydrodynamic Loads for Extension Pool B	522
Table A.1-11 Seismic Hydrodynamic Loads for Spent Fuel Pool.....	523
Table A.2-1 Maximum Stress Ratios for Flexure and Membrane Forces: RB.....	524
Table A.2-2 Maximum Stress Ratios for Membrane Compressive Forces: RB.....	528
Table A.2-3 Calculation Results for Maximum Transverse Shear: RB.....	532

List of Figures**None**

**HITACHI**

WG3-U71-ERD-S-0004	SH NO. 499
REV. 2	of 543

Table A.1-1 Design Seismic Shear Loads for Horizontal**(a) RB/FB**

Elev. (m)	Elem No.	Node No.	NS-direction			EW-direction		
			NA3 (MN)	DCD (MN)	Ratio (NA3/DCD)	NA3 (MN)	DCD (MN)	Ratio (NA3/DCD)
52.40*	1110	110	192.2	151.9	1.27	140.0	158.2	0.89
		109	192.2	151.9	1.27	140.0	158.2	0.89
34.00	1109	109	173.2	191.7	0.90	113.9	153.0	0.74
		108	173.2	191.7	0.90	113.9	153.0	0.74
27.00	1108	108	396.0	425.4	0.93	259.4	400.7	0.65
		107	396.0	425.4	0.93	259.4	400.7	0.65
22.50	1107	107	436.4	483.7	0.90	291.8	464.0	0.63
		106	436.4	483.7	0.90	291.8	464.0	0.63
17.50	1106	106	438.4	532.9	0.82	343.5	555.4	0.62
		105	438.4	532.9	0.82	343.5	555.4	0.62
13.57	1105	105	450.7	569.2	0.79	363.7	599.9	0.61
		104	450.7	569.2	0.79	363.7	599.9	0.61
9.06	1104	104	454.6	610.1	0.75	383.4	654.3	0.59
		103	454.6	610.1	0.75	383.4	654.3	0.59
4.65	1103	103	454.7	839.8	0.54	360.1	872.2	0.41
		102	454.7	839.8	0.54	360.1	872.2	0.41
-1.00	1102	102	240.0	871.4	0.28	226.6	938.5	0.24
		101	240.0	871.4	0.28	226.6	938.5	0.24
-6.40	1101	101	237.7	933.6	0.25	200.4	1029.7	0.19
-11.50		2	237.7	933.6	0.25	200.4	1029.7	0.19

*: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.



HITACHI

WG3-U71-ERD-S-0004 SH NO. 500

REV. 2

of 543

Table A.1-1 Design Seismic Shear Loads for Horizontal (Continued)

(b) RCCV

Elev. (m)	Elem No.	Node No.	NS-direction			EW-direction		
			NA3 (MN)	DCD (MN)	Ratio (NA3/DCD)	NA3 (MN)	DCD (MN)	Ratio (NA3/DCD)
34	1209	209	130.9	137.0	0.96	133.2	183.2	0.73
		208	130.9	137.0	0.96	133.2	183.2	0.73
27	1208	208	141.1	164.9	0.86	151.9	248.5	0.61
		206	141.1	164.9	0.86	151.9	248.5	0.61
17.5	1206	206	184.1	230.2	0.80	158.4	290.2	0.55
		205	184.1	230.2	0.80	158.4	290.2	0.55
13.57	1205	205	207.9	263.4	0.79	173.4	326.2	0.53
		204	207.9	263.4	0.79	173.4	326.2	0.53
9.06	1204	204	225.4	304.2	0.74	201.2	365.8	0.55
		203	225.4	304.2	0.74	201.2	365.8	0.55
4.65	1203	203	109.2	227.3	0.48	125.7	289.4	0.43
		202	109.2	227.3	0.48	125.7	289.4	0.43
-1	1202	202	67.6	272.4	0.25	68.1	330.6	0.21
		201	67.6	272.4	0.25	68.1	330.6	0.21
-6.4 -11.5	1201	201	70.7	261.7	0.27	55.1	303.5	0.18
		2	70.7	261.7	0.27	55.1	303.5	0.18



HITACHI

WG3-U71-ERD-S-0004 SH NO. 501
REV. 2 of 543

Table A.1-1 Design Seismic Shear Loads for Horizontal (Continued)

(c) RPV Pedestal and Vent Wall

Elev. (m)	Elem No.	Node No.	NS-direction			EW-direction		
			NA3 (MN)	DCD (MN)	Ratio (NA3/DCD)	NA3 (MN)	DCD (MN)	Ratio (NA3/DCD)
17.5	701	701	47.9	35.0	1.37	32.4	37.0	0.88
		702	47.9	35.0	1.37	32.4	37.0	0.88
14.5	702	702	47.1	36.4	1.29	32.4	39.3	0.83
		703	47.1	36.4	1.29	32.4	39.3	0.83
11.5	703	703	45.8	37.0	1.24	35.1	41.8	0.84
		704	45.8	37.0	1.24	35.1	41.8	0.84
8.5	704	704	44.7	37.8	1.18	36.5	44.7	0.82
		705	44.7	37.8	1.18	36.5	44.7	0.82
7.4625	705	705	39.1	40.7	0.96	29.4	40.5	0.72
		706	39.1	40.7	0.96	29.4	40.5	0.72
4.65	1303	303	20.5	32.8	0.63	16.9	44.8	0.38
		377	20.5	32.8	0.63	16.9	44.8	0.38
2.4165	1377	377	32.1	48.1	0.67	31.4	66.3	0.47
		302	32.1	48.1	0.67	31.4	66.3	0.47
-1	1302	302	22.1	65.6	0.34	15.7	81.4	0.19
		376	22.1	65.6	0.34	15.7	81.4	0.19
-2.75	1376	376	21.8	66.0	0.33	16.1	81.7	0.20
		301	21.8	66.0	0.33	16.1	81.7	0.20
-6.4	1301	301	29.8	104.4	0.29	22.4	121.2	0.18
-11.5		2	29.8	104.4	0.29	22.4	121.2	0.18

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 502

REV. 2

of 543

Table A.1-1 Design Seismic Shear Loads for Horizontal (Continued)**(d) RSW**

Elev. (m)	Elem No.	Node No.	NS-direction			EW-direction		
			NA3 (MN)	DCD (MN)	Ratio (NA3/DCD)	NA3 (MN)	DCD (MN)	Ratio (NA3/DCD)
24.18	707	707	4.2	3.0	1.44	3.0	2.7	1.09
		708	4.2	3.0	1.44	3.0	2.7	1.09
20.2	708	708	20.8	14.6	1.43	11.1	12.3	0.95
		709	20.8	14.6	1.43	11.1	12.3	0.95
15.775	709	709	24.4	17.3	1.41	12.3	14.4	0.90
		710	24.4	17.3	1.41	12.3	14.4	0.90
11.35	710	710	27.1	19.9	1.36	13.5	16.6	0.85
		711	27.1	19.9	1.36	13.5	16.6	0.85
7.4625	711	711	26.6	41.1	0.65	22.2	35.6	0.62
		712	26.6	41.1	0.65	22.2	35.6	0.62
4.65	712	712	14.3	14.3	1.00	13.5	19.5	0.69
		713	14.3	14.3	1.00	13.5	19.5	0.69
2.4165	713	713	1.6	1.5	1.03	1.6	1.3	1.29
		714	1.6	1.5	1.03	1.6	1.3	1.29
1.96 -0.8	714	714	0.9	0.9	1.15	0.9	0.7	1.31
		715	0.9	0.9	1.15	0.9	0.7	1.31



HITACHI

WG3-U71-ERD-S-0004 SH NO. 503

REV. 2

of 543

Table A.1-1 Design Seismic Shear Loads for Horizontal (Continued)

(e) RPV

Elev. (m)	Elem No.	Node No.	NS-direction			EW-direction		
			NA3 (MN)	DCD (MN)	Ratio (NA3/DCD)	NA3 (MN)	DCD (MN)	Ratio (NA3/DCD)
3.215	844	845	18.6	7.2	2.59	7.9	7.0	1.13
2.365		846	18.6	7.2	2.59	7.9	7.0	1.13
8.453	871	815	29.8	18.6	1.60	18.8	17.9	1.05
7.4625		711	29.8	18.6	1.60	18.8	17.9	1.05

**HITACHI**

WG3-U71-ERD-S-0004	SH NO. 504
REV. 2	of 543

Table A.1-2 Design Seismic Moment Loads for Horizontal
(a) RB/FB

Elev. (m)	Elem No.	Node No.	NS-direction			EW-direction		
			NA3 (MN-m)	DCD (MN-m)	Ratio (NA3/DCD)	NA3 (MN-m)	DCD (MN-m)	Ratio (NA3/DCD)
52.4*	1110	110	2724	1642	1.66	2143	1808	1.19
			5838	4303	1.36	4488	4465	1.01
34	1109	109	8196	5585	1.47	5821	5522	1.05
			8719	6477	1.35	6389	6317	1.01
27	1108	108	9400	7685	1.22	7162	7106	1.01
			9599	8964	1.07	7958	8596	0.93
22.5	1107	107	11216	9905	1.13	8328	9193	0.91
			11424	11464	1.00	9227	11297	0.82
17.5	1106	106	12105	12386	0.98	9408	11935	0.79
			12349	13778	0.90	10195	13867	0.74
13.57	1105	105	12839	14298	0.90	10255	14377	0.71
			13651	16593	0.82	11216	16740	0.67
9.06	1104	104	13904	16966	0.82	11338	17191	0.66
			15231	19378	0.79	12506	19672	0.64
4.65	1103	103	9392	19064	0.49	6302	20192	0.31
			10952	23163	0.47	7759	24272	0.32
-1	1102	102	6545	23673	0.28	4819	24948	0.19
			7303	27655	0.26	5358	29263	0.18
-6.4	1101	101	4748	28126	0.17	3351	30038	0.11
-11.5		2	5053	32235	0.16	3356	35275	0.10

*: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 505
REV. 2 of 543

Table A.1-2 Design Seismic Moment Loads for Horizontal (Continued)**(b) RCCV**

Elev. (m)	Elem No.	Node No.	NS-direction			EW-direction		
			NA3 (MN-m)	DCD (MN-m)	Ratio (NA3/DCD)	NA3 (MN-m)	DCD (MN-m)	Ratio (NA3/DCD)
34	1209	209	230	195	1.18	510	581	0.88
		208	1029	1057	0.97	1160	1496	0.78
27	1208	208	2162	1708	1.27	2303	2532	0.91
		206	2938	2959	0.99	3071	4368	0.70
17.5	1206	206	3259	3315	0.98	3667	4715	0.78
		205	3691	4147	0.89	3904	5761	0.68
13.57	1205	205	3817	4327	0.88	4203	5949	0.71
		204	4389	5404	0.81	4491	7264	0.62
9.06	1204	204	4481	5628	0.80	4853	7519	0.65
		203	5190	6785	0.76	5203	8909	0.58
4.65	1203	203	5523	6992	0.79	5470	9171	0.60
		202	5740	7958	0.72	5824	10581	0.55
-1	1202	202	6008	8076	0.74	6066	10738	0.56
		201	5924	9417	0.63	6035	12523	0.48
-6.4 -11.5	1201	201	6053	9534	0.63	6141	12651	0.49
		2	5961	10836	0.55	6127	14200	0.43

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 506
REV. 2 of 543

Table A.1-2 Design Seismic Moment Loads for Horizontal (Continued)**(c) RPV Pedestal and Vent Wall**

Elev. (m)	Elem No.	Node No.	NS-direction			EW-direction		
			NA3 (MN-m)	DCD (MN-m)	Ratio (NA3/DCD)	NA3 (MN-m)	DCD (MN-m)	Ratio (NA3/DCD)
17.5	701	701	107	78	1.37	62	85	0.73
		702	139	114	1.22	107	136	0.79
14.5	702	702	139	119	1.17	113	148	0.76
		703	279	226	1.24	204	260	0.78
11.5	703	703	280	229	1.22	207	269	0.77
		704	411	340	1.21	301	390	0.77
8.5	704	704	411	341	1.20	302	396	0.76
		705	458	379	1.21	338	438	0.77
7.4625	705	705	440	359	1.23	352	438	0.80
		706	513	456	1.13	427	525	0.81
4.65	1303	303	667	581	1.15	496	621	0.80
		377	651	599	1.09	502	667	0.75
2.4165	1377	377	793	732	1.08	614	817	0.75
		302	754	778	0.97	631	922	0.68
-1	1302	302	691	839	0.82	571	959	0.59
		376	658	928	0.71	555	1050	0.53
-2.75	1376	376	658	928	0.71	555	1050	0.53
		301	594	1116	0.53	524	1330	0.39
-6.4	1301	301	555	1149	0.48	518	1346	0.39
-11.5		2	553	1655	0.33	514	1963	0.26

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 507

REV. 2

of 543

Table A.1-2 Design Seismic Moment Loads for Horizontal (Continued)**(d) RSW**

Elev. (m)	Elem No.	Node No.	NS-direction			EW-direction		
			NA3 (MN-m)	DCD (MN-m)	Ratio (NA3/DCD)	NA3 (MN-m)	DCD (MN-m)	Ratio (NA3/DCD)
24.18	707	707	2.5	2.1	1.19	2.2	1.7	1.29
		708	18.9	13.2	1.43	13.8	12.4	1.11
20.2	708	708	25.8	18.4	1.40	19.8	16.8	1.18
		709	113.5	79.0	1.44	59.3	68.4	0.87
15.775	709	709	116.7	81.9	1.42	61.3	71.0	0.86
		710	224.1	158.4	1.41	115.5	133.6	0.86
11.35	710	710	227.6	159.1	1.43	116.9	136.4	0.86
		711	331.9	236.2	1.41	169.3	198.7	0.85
7.4625	711	711	135.4	197.0	0.69	125.5	183.6	0.68
		712	169.6	292.4	0.58	151.7	251.3	0.60
4.65	712	712	156.8	125.1	1.25	142.3	133.0	1.07
		713	147.3	133.0	1.11	132.8	150.9	0.88
2.4165	713	713	4.0	3.6	1.11	4.0	3.2	1.25
		714	3.3	2.9	1.14	3.3	2.7	1.22
1.96 -0.8	714	714	3.0	2.7	1.11	3.0	2.4	1.25
		715	0.7	0.5	1.40	0.6	0.5	1.20



HITACHI

WG3-U71-ERD-S-0004 SH NO. 508

REV. 2

of 543

Table A.1-2 Design Seismic Moment Loads for Horizontal (Continued)

(e) RPV

Elev. (m)	Elem No.	Node No.	NS-direction			EW-direction		
			NA3 (MN-m)	DCD (MN-m)	Ratio (NA3/DCD)	NA3 (MN-m)	DCD (MN-m)	Ratio (NA3/DCD)
3.215	844	845	29.9	16.2	1.85	15.6	14.3	1.09
2.365		846	44.5	21.3	2.09	18.9	17.3	1.09
8.453	871	815	182.7	143.8	1.27	151.9	135.5	1.12
7.4625		711	176.6	141.3	1.25	147.4	136.8	1.08

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 509

REV. 2

of 543

Table A.1-3 Design Seismic Torsion Loads for Horizontal**(a) RB/FB**

Elev. (m)	Elem No.	Node No.	Calculated Torsion			Accidental Torsion			Design Torsion		
			NA3 (MN-m)	DCD (MN-m)	Ratio (NA3/DCD)	NA3 (MN-m)	DCD (MN-m)	Ratio (NA3/DCD)	NA3 (MN-m)	DCD (MN-m)	Ratio (NA3/DCD)
52.4*	1110	110	1284	1379	0.93	471	388	1.22	1755	1766	0.99
			1284	1379	0.93	471	388	1.22	1755	1766	0.99
34	1109	109	1938	2405	0.81	424	470	0.90	2362	2874	0.82
			1938	2405	0.81	424	470	0.90	2362	2874	0.82
27	1108	108	2799	3329	0.84	1386	1489	0.93	4185	4822	0.87
			2799	3329	0.84	1386	1489	0.93	4185	4822	0.87
22.5	1107	107	4678	6093	0.77	1527	1693	0.90	6205	7786	0.80
			4678	6093	0.77	1527	1693	0.90	6205	7786	0.80
17.5	1106	106	4023	5068	0.79	1535	1944	0.79	5557	7012	0.79
			4023	5068	0.79	1535	1944	0.79	5557	7012	0.79
13.57	1105	105	4211	5245	0.80	1578	2100	0.75	5788	7344	0.79
			4211	5245	0.80	1578	2100	0.75	5788	7344	0.79
9.06	1104	104	4694	5985	0.78	1591	2290	0.69	6285	8275	0.76
			4694	5985	0.78	1591	2290	0.69	6285	8275	0.76
4.65	1103	103	5248	11425	0.46	1591	3053	0.52	6839	14478	0.47
			5248	11425	0.46	1591	3053	0.52	6839	14478	0.47
-1	1102	102	2718	11523	0.24	840	3285	0.26	3558	14808	0.24
			2718	11523	0.24	840	3285	0.26	3558	14808	0.24
-6.4	1101	101	2079	11690	0.18	832	3604	0.23	2910	15294	0.19
-11.5		2	2079	11690	0.18	832	3604	0.23	2910	15294	0.19

*: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 510
REV. 2 of 543

Table A.1-3 Design Seismic Torsion Loads for Horizontal (Continued)**(b) RCCV**

Elev. (m)	Elem No.	Node No.	Calculated Torsion			Accidental Torsion			Design Torsion		
			NA3 (MN-m)	DCD (MN-m)	Ratio (NA3/DCD)	NA3 (MN-m)	DCD (MN-m)	Ratio (NA3/DCD)	NA3 (MN-m)	DCD (MN-m)	Ratio (NA3/DCD)
34	1209	209	29	36	0.81	266	366	0.73	296	402	0.73
		208	29	36	0.81	266	366	0.73	296	402	0.73
27	1208	208	1489	1814	0.82	304	497	0.61	1793	2311	0.78
		206	1489	1814	0.82	304	497	0.61	1793	2311	0.78
17.5	1206	206	1591	1982	0.80	368	580	0.63	1960	2562	0.76
		205	1591	1982	0.80	368	580	0.63	1960	2562	0.76
13.57	1205	205	1762	2186	0.81	416	652	0.64	2178	2838	0.77
		204	1762	2186	0.81	416	652	0.64	2178	2838	0.77
9.06	1204	204	2062	2616	0.79	451	732	0.62	2513	3348	0.75
		203	2062	2616	0.79	451	732	0.62	2513	3348	0.75
4.65	1203	203	1439	2870	0.50	251	579	0.43	1691	3449	0.49
		202	1439	2870	0.50	251	579	0.43	1691	3449	0.49
-1	1202	202	690	2926	0.24	136	661	0.21	826	3587	0.23
		201	690	2926	0.24	136	661	0.21	826	3587	0.23
-6.4	1201	201	349	1962	0.18	141	607	0.23	490	2569	0.19
-11.5		2	349	1962	0.18	141	607	0.23	490	2569	0.19



HITACHI

WG3-U71-ERD-S-0004 SH NO. 511
REV. 2 of 543

Table A.1-3 Design Seismic Torsion Loads for Horizontal (Continued)

(c) RPV Pedestal and Vent Wall

Elev. (m)	Elem No.	Node No.	Calculated Torsion			Accidental Torsion			Design Torsion		
			NA3 (MN-m)	DCD (MN-m)	Ratio (NA3/DCD)	NA3 (MN-m)	DCD (MN-m)	Ratio (NA3/DCD)	NA3 (MN-m)	DCD (MN-m)	Ratio (NA3/DCD)
17.5	701	701	107	73	1.47	40	12	3.38	147	85	1.74
		702	107	73	1.47	40	12	3.38	147	85	1.74
14.5	702	702	108	75	1.44	39	13	3.09	148	88	1.68
		703	108	75	1.44	39	13	3.09	148	88	1.68
11.5	703	703	111	77	1.44	38	14	2.76	149	91	1.64
		704	111	77	1.44	38	14	2.76	149	91	1.64
8.5	704	704	112	78	1.44	37	15	2.53	149	93	1.61
		705	112	78	1.44	37	15	2.53	149	93	1.61
7.4625	705	705	92	59	1.56	33	13	2.53	125	72	1.74
		706	92	59	1.56	33	13	2.53	125	72	1.74
4.65	1303	303	71	142	0.50	16	36	0.46	87	177	0.49
		377	71	142	0.50	16	36	0.46	87	177	0.49
2.4165	1377	377	86	172	0.50	26	53	0.48	112	225	0.50
		302	86	172	0.50	26	53	0.48	112	225	0.50
-1	1302	302	34	146	0.23	18	65	0.27	52	211	0.25
		376	34	146	0.23	18	65	0.27	52	211	0.25
-2.75	1376	376	34	146	0.23	17	65	0.27	52	212	0.25
		301	34	146	0.23	17	65	0.27	52	212	0.25
-6.4	1301	301	21	118	0.18	24	97	0.25	45	215	0.21
-11.5		2	21	118	0.18	24	97	0.25	45	215	0.21

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 512
REV. 2 of 543

Table A.1-3 Design Seismic Torsion Loads for Horizontal (Continued)**(d) RSW**

Elev. (m)	Elem No.	Node No.	Calculated Torsion			Accidental Torsion			Design Torsion		
			NA3 (MN-m)	DCD (MN-m)	Ratio (NA3/DCD)	NA3 (MN-m)	DCD (MN-m)	Ratio (NA3/DCD)	NA3 (MN-m)	DCD (MN-m)	Ratio (NA3/DCD)
24.18	707	707	0.5	0.4	1.25	2.0	1.4	1.38	2.5	1.8	1.40
		708	0.5	0.4	1.25	2.0	1.4	1.38	2.5	1.8	1.40
20.2	708	708	1.7	1.4	1.21	9.8	6.9	1.43	11.6	8.3	1.39
		709	1.7	1.4	1.21	9.8	6.9	1.43	11.6	8.3	1.39
15.775	709	709	2.4	1.9	1.26	11.5	8.2	1.41	13.9	10.1	1.38
		710	2.4	1.9	1.26	11.5	8.2	1.41	13.9	10.1	1.38
11.35	710	710	3.0	2.4	1.25	12.8	9.4	1.36	15.8	11.8	1.34
		711	3.0	2.4	1.25	12.8	9.4	1.36	15.8	11.8	1.34
7.4625	711	711	22.9	22.0	1.04	12.6	19.4	0.65	35.5	41.4	0.86
		712	22.9	22.0	1.04	12.6	19.4	0.65	35.5	41.4	0.86
4.65	712	712	15.2	30.3	0.50	6.7	9.2	0.73	21.9	39.5	0.56
		713	15.2	30.3	0.50	6.7	9.2	0.73	21.9	39.5	0.56
2.4165	713	713	0.2	0.2	1.00	0.7	0.7	1.03	0.9	0.9	0.98
		714	0.2	0.2	1.00	0.7	0.7	1.03	0.9	0.9	0.98
1.96 -0.8	714	714	0.1	0.1	1.00	0.4	0.4	1.05	0.5	0.5	1.09
		715	0.1	0.1	1.00	0.4	0.4	1.05	0.5	0.5	1.09



Table A.1-4 Vertical Acceleration

(a) RB/FB

Elev. (m)	Node No.	Stick Model	NA3 (g)	DCD (g)	Ratio (NA3/DCD)
52.4*	110	RBFB	1.56	1.25	1.25
34	109	RBFB	1.20	0.83	1.45
27	108	RBFB	1.02	0.73	1.40
22.5	107	RBFB	0.92	0.73	1.26
17.5	106	RBFB	0.80	0.73	1.10
13.57	105	RBFB	0.72	0.74	0.97
9.06	104	RBFB	0.62	0.73	0.85
4.65	103	RBFB	0.56	0.78	0.72
-1	102	RBFB	0.57	0.76	0.75
-6.4	101	RBFB	0.53	0.68	0.78
-11.5	2	RBFB	0.51	0.63	0.81
-15.5	1	RBFB	0.52	0.51	1.02

*: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.

(b) RCCV

Elev. (m)	Node No.	Stick Model	NA3 (g)	DCD (g)	Ratio (NA3/DCD)
34	209	RCCV	1.20	0.90	1.33
27	208	RCCV	1.12	0.88	1.27
17.5	206	RCCV	0.91	0.73	1.25
13.57	205	RCCV	0.82	0.78	1.05
9.06	204	RCCV	0.72	0.65	1.11
4.65	203	RCCV	0.65	0.69	0.94
-1	202	RCCV	0.58	0.59	0.98
-6.4	201	RCCV	0.55	0.59	0.93

**Table A.1-4 Vertical Acceleration (Continued)****(c) RPV Pedestal and Vent Wall**

Elev. (m)	Node No.	Stick Model	NA3 (g)	DCD (g)	Ratio (NA3/DCD)
17.5	701	VW	0.82	1.10	0.75
14.5	702	VW	0.86	1.04	0.83
11.5	703	VW	0.81	0.92	0.88
8.5	704	VW	0.72	0.77	0.93
7.4625	705	VW	0.67	0.70	0.95
4.65	706, 303	Pedestal	0.69	0.67	1.02
-1	302	Pedestal	0.59	0.59	1.01
-6.4	301	Pedestal	0.56	0.50	1.11

(d) RSW

Elev. (m)	Node No.	Stick Model	NA3 (g)	DCD (g)	Ratio (NA3/DCD)
24.18	707	RSW	1.30	0.97	1.35
20.2	708	RSW	1.23	0.94	1.31
15.775	709	RSW	0.99	0.84	1.18
11.35	710	RSW	0.78	0.76	1.02
7.4625	711	RSW	0.68	0.70	0.96
4.65	712	RSW	0.69	0.67	1.02
2.4615	713	RSW	0.64	0.64	1.00
1.96	714	RSW	0.64	0.64	1.00
-0.8	715	RSW	0.64	0.65	0.99



Table A.1-4 Vertical Acceleration (Continued)

(e) Slab Oscillator

Elev. (m)	Node No.	Stick Model	NA3 (g)	DCD (g)	Ratio (NA3/DCD)
52.4*	9101	Oscillator	0.33	1.20	0.28
	9102	Oscillator	1.33	1.82	0.73
	9103	Oscillator	6.27	3.14	2.00
	9104	Oscillator	2.62	2.26	1.16
	9105	Oscillator	2.42	2.32	1.04
	9106	Oscillator	3.74	2.99	1.25
	9107	Oscillator	3.22	2.80	1.15
	9108	Oscillator	2.50	2.61	0.96
	9109	Oscillator	1.53	---	---
34.00	9091	Oscillator	1.61	1.29	1.25
	9092	Oscillator	1.61	1.06	1.52
	9093	Oscillator	1.12	---	---
27.00	9081	Oscillator	1.64	1.16	1.41
	9082	Oscillator	1.52	0.99	1.54
	9083	Oscillator	1.30	1.09	1.19
	9084	Oscillator	1.67	1.31	1.27
	9085	Oscillator	1.46	0.97	1.51
	9086	Oscillator	1.12	---	---
	9087	Oscillator	1.03	---	---
22.50	9071	Oscillator	1.15	1.60	0.72
	9072	Oscillator	1.79	1.31	1.37
	9073	Oscillator	4.47	2.03	2.20
	9074	Oscillator	1.67	1.31	1.27
	9075	Oscillator	1.51	1.16	1.30
	9076	Oscillator	1.65	---	---
17.50	9061	Oscillator	3.65	1.79	2.04
	9062	Oscillator	2.62	1.49	1.76
	9063	Oscillator	1.17	0.82	1.43
	9064	Oscillator	2.56	1.84	1.39
	9065	Oscillator	1.28	1.42	0.90
	99064	Oscillator	0.99	1.07	0.93
	9066	Oscillator	1.09	---	---
	9067	Oscillator	0.91	---	---

*: The difference between the modeled elevation 52.4 m and the actual elevation 52.7 m at the RB roof is negligibly small.



Table A.1-4 Vertical Acceleration (Continued)

(e) Slab Oscillator

Elev. (m)	Node No.	Stick Model	NA3 (g)	DCD (g)	Ratio (NA3/DCD)
13.57	9051	Oscillator	1.11	0.81	1.37
	9052	Oscillator	1.25	1.46	0.86
	9053	Oscillator	0.99	---	---
	9054	Oscillator	0.83	---	---
9.06	9041	Oscillator	1.02	0.88	1.16
	9042	Oscillator	1.26	1.42	0.89
	9043	Oscillator	0.93	---	---
	9044	Oscillator	0.80	---	---
4.65	9031	Oscillator	1.62	1.17	1.38
	9032	Oscillator	0.89	0.97	0.92
	9033	Oscillator	1.12	1.02	1.10
	9034	Oscillator	1.81	1.51	1.20
	9035	Oscillator	1.09	1.38	0.79
	9036	Oscillator	0.94	---	---
	9037	Oscillator	0.82	---	---
-1.00	9021	Oscillator	0.97	1.12	0.87
	9022	Oscillator	2.07	1.45	1.43
	9023	Oscillator	0.98	1.01	0.97
	9024	Oscillator	1.12	0.89	1.26
	9025	Oscillator	1.21	1.34	0.90
	9026	Oscillator	1.63	1.57	1.04
	9027	Oscillator	0.93	0.88	1.06
	9028	Oscillator	0.96	---	---
	9029	Oscillator	1.30	---	---
	9030	Oscillator	0.87	---	---
-6.40	9011	Oscillator	0.84	0.92	0.91
	9012	Oscillator	1.17	0.92	1.27
	9013	Oscillator	1.52	1.35	1.13
	9014	Oscillator	1.19	---	---
	9015	Oscillator	1.03	---	---



Table A.1-6 Seismic Hydrodynamic Loads for GDCS Pool

(a) Longitudinal Direction Motion

Wall				Floor			
Depth d/H	Pressure			Distance x/(L/2)	Pressure		
	NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)		NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)
0.0	9.7	9.7	1.00	0.0	0.0	0.0	---
0.2	21.0	21.0	1.00	0.2	6.1	6.1	1.00
0.4	35.8	35.8	1.00	0.4	13.1	13.1	1.00
0.6	46.6	46.6	1.00	0.6	22.2	22.2	1.00
0.8	53.1	53.1	1.00	0.8	35.1	35.1	1.00
1.0	55.3	55.3	1.00	1.0	55.3	55.3	1.00

(b) Transversal Direction Motion

Wall				Floor			
Depth d/H	Pressure			Distance x/(L/2)	Pressure		
	NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)		NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)
0.0	9.8	9.8	1.00	0.0	0.0	0.0	---
0.2	15.6	15.6	1.00	0.2	4.3	4.3	1.00
0.4	23.8	23.8	1.00	0.4	8.8	8.8	1.00
0.6	26.1	26.1	1.00	0.6	13.7	13.7	1.00
0.8	26.1	26.1	1.00	0.8	19.4	19.4	1.00
1.0	26.1	26.1	1.00	1.0	26.1	26.1	1.00

(c) Vertical Motion

Depth d/H	Wall			Floor		
	Pressure			NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)
0.0	0.0	0.0	---	68.0 for all floor area	53.4 for all floor area	1.27
0.2	13.6	10.7	1.27			
0.4	27.2	21.3	1.27			
0.6	40.8	32.0	1.27			
0.8	54.4	42.7	1.27			
1.0	68.0	53.4	1.27			

Note: 1) "d" is depth from the top of water. "H" is water height of the pool.
 2) "x" is distance from the center of the pool. "L" is width of the pool.

**HITACHI**

WG3-U71-ERD-S-0004 SH NO. 519

REV. 2

of 543

Table A.1-7 Seismic Hydrodynamic Loads for RPV Cavity / Dryer Separator / Fuel Buffer Pool**(a) NS / EW Motion**

Wall				Floor			
Depth d/H	Pressure			Distance x/(L/2)	Pressure		
	NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)		NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)
0.0	15.2	15.2	1.00	0.0	0.0	0.0	---
0.2	23.1	23.1	1.00	0.2	8.0	8.0	1.00
0.4	37.0	37.0	1.00	0.4	16.7	16.7	1.00
0.6	47.8	47.8	1.00	0.6	27.0	27.0	1.00
0.8	54.5	54.5	1.00	0.8	39.9	39.9	1.00
1.0	56.7	56.7	1.00	1.0	56.7	56.7	1.00

(b) Vertical Motion

Depth d/H	Wall			Floor		
	Pressure			NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)
0.0	0.0	0.0	---	76.2 for all floor area	58.5 for all floor area	1.30
0.2	15.2	11.7	1.30			
0.4	30.5	23.4	1.30			
0.6	45.7	35.1	1.30			
0.8	61.0	46.8	1.30			
1.0	76.2	58.5	1.30			

Note: 1) "d" is depth from the top of water. "H" is water height of the pool.
 2) "x" is distance from the center of the pool. "L" is width of the pool.



Table A.1-8 Seismic Hydrodynamic Loads for IC / PCCS Pool

(a) NS / EW Motion

Wall				Floor			
Depth d/H	Pressure			Distance x/(L/2)	Pressure		
	NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)		NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)
0.0	9.1	9.1	1.00	0.0	0.0	0.0	---
0.2	13.6	13.6	1.00	0.2	4.6	4.6	1.00
0.4	21.7	21.7	1.00	0.4	9.5	9.5	1.00
0.6	26.7	26.7	1.00	0.6	14.8	14.8	1.00
0.8	28.2	28.2	1.00	0.8	21.0	21.0	1.00
1.0	28.2	28.2	1.00	1.0	28.2	28.2	1.00

(b) Vertical Motion

Depth d/H	Wall			Floor		
	Pressure			NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)
	NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)			
0.0	0.0	0.0	---	54.6 for all floor area	41.9 for all floor area	1.30
0.2	10.9	8.4	1.30			
0.4	21.8	16.8	1.30			
0.6	32.8	25.1	1.30			
0.8	43.7	33.5	1.30			
1.0	54.6	41.9	1.30			

Note: 1) "d" is depth from the top of water. "H" is water height of the pool.
 2) "x" is distance from the center of the pool. "L" is width of the pool.



Table A.1-9 Seismic Hydrodynamic Loads for Extension Pool A

(a) NS Motion

Wall				Floor			
Depth d/H	Pressure			Distance x/(L/2)	Pressure		
	NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)		NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)
0.0	4.8	4.8	1.00	0.0	0.0	0.0	---
0.2	16.5	16.5	1.00	0.2	1.3	1.3	1.00
0.4	28.6	28.6	1.00	0.4	2.7	2.7	1.00
0.6	37.3	37.3	1.00	0.6	4.7	4.7	1.00
0.8	42.5	42.5	1.00	0.8	12.3	12.3	1.00
1.0	44.3	44.3	1.00	1.0	44.3	44.3	1.00

(b) EW Motion

Wall				Floor			
Depth d/H	Pressure			Distance x/(L/2)	Pressure		
	NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)		NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)
0.0	7.8	7.8	1.00	0.0	0.0	0.0	---
0.2	12.9	12.9	1.00	0.2	3.9	3.9	1.00
0.4	20.3	20.3	1.00	0.4	8.1	8.1	1.00
0.6	23.8	23.8	1.00	0.6	12.6	12.6	1.00
0.8	24.0	24.0	1.00	0.8	17.8	17.8	1.00
1.0	24.0	24.0	1.00	1.0	24.0	24.0	1.00

(c) Vertical Motion

Depth d/H	Wall			Floor		
	Pressure			NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)
	NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)			
0.0	0.0	0.0	---	54.6 for all floor area	41.9 for all floor area	1.30
0.2	10.9	8.4	1.30			
0.4	21.8	16.8	1.30			
0.6	32.8	25.1	1.30			
0.8	43.7	33.5	1.30			
1.0	54.6	41.9	1.30			

Note: 1) "d" is depth from the top of water. "H" is water height of the pool.
 2) "x" is distance from the center of the pool. "L" is width of the pool.



Table A.1-10 Seismic Hydrodynamic Loads for Extension Pool B

(a) NS Motion

Wall				Floor			
Depth d/H	Pressure			Distance x(L/2)	Pressure		
	NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)		NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)
0.0	7.8	7.8	1.00	0.0	0.0	0.0	---
0.2	12.5	12.5	1.00	0.2	3.5	3.5	1.00
0.4	19.2	19.2	1.00	0.4	7.2	7.2	1.00
0.6	21.5	21.5	1.00	0.6	11.3	11.3	1.00
0.8	21.5	21.5	1.00	0.8	16.0	16.0	1.00
1.0	21.5	21.5	1.00	1.0	21.5	21.5	1.00

(b) EW Motion

Wall				Floor			
Depth d/H	Pressure			Distance x/(L/2)	Pressure		
	NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)		NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)
0.0	13.7	13.7	1.00	0.0	0.0	0.0	---
0.2	18.2	18.2	1.00	0.2	5.5	5.5	1.00
0.4	27.8	27.8	1.00	0.4	11.7	11.7	1.00
0.6	35.5	35.5	1.00	0.6	19.1	19.1	1.00
0.8	40.3	40.3	1.00	0.8	28.7	28.7	1.00
1.0	41.9	41.9	1.00	1.0	41.9	41.9	1.00

(c) Vertical Motion

Depth d/H	Wall			Floor		
	Pressure			NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)
	NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)			
0.0	0.0	0.0	---	54.6 for all floor area	41.9 for all floor area	1.30
0.2	10.9	8.4	1.30			
0.4	21.8	16.8	1.30			
0.6	32.8	25.1	1.30			
0.8	43.7	33.5	1.30			
1.0	54.6	41.9	1.30			

Note: 1) "d" is depth from the top of water. "H" is water height of the pool.
 2) "x" is distance from the center of the pool. "L" is width of the pool.



Table A.1-11 Seismic Hydrodynamic Loads for Spent Fuel Pool

(a) NS Motion

Wall				Floor			
Depth d/H	Pressure			Distance x/(L/2)	Pressure		
	NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)		NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)
0.0	12.3	12.3	1.00	0.0	0.0	0.0	---
0.2	23.6	22.6	1.04	0.2	7.4	7.1	1.04
0.4	37.8	36.1	1.05	0.4	15.2	14.5	1.05
0.6	44.6	42.6	1.05	0.6	23.7	22.7	1.05
0.8	45.2	43.2	1.05	0.8	33.6	32.1	1.05
1.0	45.2	43.2	1.05	1.0	45.2	43.2	1.05

(b) EW Motion

Wall				Floor			
Depth d/H	Pressure			Distance x/(L/2)	Pressure		
	NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)		NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)
0.0	11.8	11.8	1.00	0.0	0.0	0.0	---
0.2	24.2	23.2	1.04	0.2	8.5	8.2	1.04
0.4	40.0	38.2	1.05	0.4	17.5	16.7	1.05
0.6	49.4	47.2	1.05	0.6	27.4	26.2	1.05
0.8	52.2	49.8	1.05	0.8	38.7	37.0	1.05
1.0	52.2	49.8	1.05	1.0	52.2	49.8	1.05

(c) Vertical Motion

Depth d/H	Wall			Floor		
	Pressure			NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)
	NA3 (kN/m ²)	DCD (kN/m ²)	Ratio (NA3/DCD)			
0.0	0.0	0.0	---	98.5 for all floor area	98.5 for all floor area	1.00
0.2	19.7	19.7	1.00			
0.4	39.4	39.4	1.00			
0.6	59.1	59.1	1.00			
0.8	78.8	78.8	1.00			
1.0	98.5	98.5	1.00			

Note: 1) "d" is depth from the top of water. "H" is water height of the pool.
 2) "x" is distance from the center of the pool. "L" is width of the pool.



HITACHI

WG3-U71-ERD-S-0004 SH NO. 524

REV. 2

of 543

Table A.2-1 Maximum Stress Ratios for Flexure and Membrane Forces: RB

Location	Element ID	Concrete				
		NA3		DCD		Ratio (NA3/DCD)
		σ/σ_s	Load ID	σ/σ_s	Load ID	
18 Wall Below RCCV Bottom	6	0.433	7501	0.767	7501	0.57
	13	0.518	7501	0.692	7501	0.75
	24	0.568	7501	0.696	7501	0.82
19 Wall Below RCCV Mid-Height	806	0.298	8514	0.373	7441	0.80
	813	0.339	8514	0.417	7441	0.81
	824	0.367	8514	0.463	7421	0.79
20 Wall Below RCCV Top	1606	0.542	6241	0.542	6241	1.00
	1613	0.625	6341	0.871	7471	0.72
	1624	0.639	8507	0.616	6471	1.04
21 Exterior Wall @ EL-11.50 ~-10.50m	20011	0.338	7251	0.817	7301	0.41
	20023	0.467	7492	0.550	7492	0.85
	30010	0.302	7501	0.523	7501	0.58
	30020	0.192	7211	0.255	7571	0.75
	40001	0.284	7481	0.393	7431	0.72
	40011	0.338	7501	0.497	7501	0.68
22 Exterior Wall @ EL4.65 ~-6.60m	22011	0.388	7561	0.489	7211	0.79
	22023	0.391	8511	0.384	7492	1.02
	32010	0.235	7131	0.278	7201	0.85
	32020	0.257	7371	0.262	7301	0.98
	42001	0.269	7201	0.283	7301	0.95
	42011	0.260	7501	0.333	7201	0.78
23 Exterior Wall @ EL22.50 ~-24.60m	24211	0.336	7501	0.373	7201	0.90
	24224	0.436	7961	0.382	7581	1.14
	34210	0.231	5026	0.217	4022	1.07
	34220	0.195	7482	0.229	7441	0.85
	44201	0.230	8502	0.213	7561	1.08



HITACHI

WG3-U71-ERD-S-0004 SH NO. 525

REV. 2

of 543

Table A.2-1 Maximum Stress Ratios for Flexure and Membrane Forces: RB (Continued)

Location	Element ID	Concrete				
		NA3		DCD		Ratio (NA3/DCD)
		σ/σ_s	Load ID	σ/σ_s	Load ID	
24 Basemat @ Wall Below RCCV	90140	0.500	7571	0.570	7511	0.88
	90182	0.244	7491	0.257	7491	0.95
	90111	0.237	7571	0.233	7491	1.02
25 Slab EL4.65m @ RCCV	93140	0.478	8514	0.491	7482	0.97
	93182	0.741	8514	0.690	7441	1.07
	93111	0.689	8514	0.612	7441	1.13
26 Slab EL17.5m @ RCCV	96144	0.412	8511	0.409	7482	1.01
	96186	0.483	8513	0.397	7133	1.22
	96113	0.588	8513	0.524	7482	1.12
27 Slab EL27.0m @ RCCV	98472	0.890	8512	0.566	6001	1.57
	98514	0.668	8513	0.200	6001	3.34
	98424	0.844	8514	0.600	6001	1.41
28 Pool Girder @ Storage Pool	123054	0.669	8512	0.595	6001	1.13
	123154	0.455	8512	0.211	6001	2.16
29 Pool Girder @ Cavity	123062	0.464	6971	0.212	6001	2.19
	123162	0.365	7461	0.201	6001	1.82
30 Pool Girder @ Fuel Pool	123067	0.888	8513	0.514	6001	1.73
	123167	0.601	8505	0.494	6001	1.22
31 MS Tunnel Wall and Slab	150122	0.517	2021	0.516	2021	1.00
	96611	0.383	7521	0.361	7521	1.06
	98614	0.284	7371	0.269	7341	1.05
32 IC/PCCS Pool Wall in NS Dir.	125051	0.272	9005	0.097	6001	2.80
	125151	0.292	9012	0.212	6001	1.38
	125055	0.340	8512	0.187	6001	1.82
	125155	0.287	9003	0.173	6001	1.66



HITACHI

WG3-U71-ERD-S-0004 SH NO. 526

REV. 2

of 543

Table A.2-1 Maximum Stress Ratios for Flexure and Membrane Forces: RB (Continued)

Location	Element ID	Primary Reinforcement															
		Direction 1 ¹								Direction 2 ²							
		In/Top				Out/Bottom				In/Top				Out/Bottom			
		NA3		DCD		Ratio (NA3 /DCD)	NA3		DCD		Ratio (NA3 /DCD)	NA3		DCD		Ratio (NA3 /DCD)	Ratio (NA3 /DCD)
		σ/σ_a	Load ID	σ/σ_a	Load ID		σ/σ_a	Load ID	σ/σ_a	Load ID		σ/σ_a	Load ID	σ/σ_a	Load ID		
18 Wall	6	0.249	7721	0.885	7992	0.28	0.182	7641	0.622	7641	0.29	0.250	7851	0.918	7801	0.27	0.203
Below RCCV	13	0.206	8081	0.607	7801	0.34	0.157	7721	0.433	7622	0.36	0.250	7851	0.674	7801	0.37	0.250
Bottom	24	0.202	7992	0.630	7601	0.32	0.172	7672	0.452	7621	0.38	0.252	7642	0.598	7641	0.42	0.241
19 Wall	806	0.284	8021	0.753	8081	0.38	0.189	7673	0.458	8021	0.41	0.209	7671	0.580	8001	0.36	0.183
Below RCCV	813	0.177	9011	0.578	7821	0.31	0.132	9011	0.363	7982	0.36	0.120	7651	0.540	7611	0.22	0.206
Mid-Height	824	0.223	7921	0.737	7621	0.30	0.140	7651	0.447	7621	0.31	0.200	7971	0.585	7801	0.34	0.237
20 Wall	1606	0.383	7701	0.701	7601	0.55	0.364	7471	0.521	7421	0.70	0.380	7701	0.738	7602	0.51	0.264
Below RCCV	1613	0.263	7651	0.533	7601	0.49	0.302	7471	0.393	7421	0.77	0.335	7701	0.673	7602	0.50	0.210
Top	1624	0.378	7751	0.693	7701	0.55	0.363	7471	0.510	7441	0.71	0.380	7602	0.698	7602	0.54	0.289
21 Exterior Wall	20011	0.391	8514	0.906	7482	0.43	0.298	7821	0.832	7841	0.36	0.568	8514	0.912	7482	0.62	0.314
@ EL-11.50	20023	0.214	7492	0.264	7492	0.81	0.099	7491	0.169	8001	0.58	0.228	7992	0.334	7992	0.68	0.097
~10.50m	30010	0.183	9014	0.570	7931	0.32	0.196	7961	0.582	7941	0.34	0.209	7961	0.813	7981	0.26	0.213
	30020	0.048	8081	0.087	7601	0.55	0.111	7261	0.168	7981	0.66	0.061	7601	0.300	7601	0.20	0.157
	40001	0.078	8001	0.174	7992	0.45	0.170	7461	0.276	7411	0.61	0.074	7481	0.371	7601	0.20	0.209
	40011	0.122	7971	0.667	7921	0.18	0.143	8011	0.735	7982	0.19	0.176	7961	0.816	7931	0.22	0.271
22 Exterior Wall	22011	0.728	8513	0.970	7482	0.75	0.591	8513	0.748	7482	0.79	0.723	7871	0.905	7821	0.80	0.827
@ EL.4.65	22023	0.367	8001	0.414	8001	0.89	0.345	7701	0.434	7701	0.79	0.487	7601	0.643	8001	0.76	0.526
~6.60m	32010	0.552	7482	0.812	7441	0.68	0.635	8514	0.737	7482	0.86	0.525	7173	0.893	7321	0.59	0.714
	32020	0.429	7431	0.518	7411	0.83	0.375	9012	0.435	7982	0.86	0.719	7831	0.767	7811	0.94	0.802
	42001	0.385	7751	0.489	7411	0.79	0.253	7991	0.346	7801	0.73	0.698	9012	0.673	7631	1.04	0.677
	42011	0.504	8511	0.684	7801	0.74	0.518	8511	0.505	7421	1.02	0.571	9014	0.800	7831	0.71	0.616
23 Exterior Wall	24211	0.662	7461	0.901	7481	0.74	0.571	8511	0.554	7241	1.03	0.725	7461	0.853	7481	0.85	0.630
@ EL.22.50	24224	0.699	7481	0.702	7461	1.00	0.451	7601	0.493	7612	0.92	0.878	7632	0.843	7613	1.04	0.848
~24.60m	34210	0.655	7482	0.815	7482	0.80	0.909	7482	0.907	7482	1.00	0.520	8514	0.534	7371	0.97	0.854
	34220	0.491	8511	0.433	7941	1.13	0.250	8512	0.317	8081	0.79	0.484	7261	0.466	7991	1.04	0.617
	44201	0.498	7441	0.562	7441	0.89	0.312	7581	0.369	7581	0.84	0.545	7461	0.566	7431	0.96	0.571

Note *: Wall Below RCCV Direction1 : Hoop, Direction2 : Vertical
 Exterior Wall Direction1 : Horizontal, Direction2 : Vertical
 Slab Direction1 : N-S, Direction2 : E-W
 Pool Girder Direction1 : Horizontal, Direction2 : Vertical
 MS Tunnel Wall Direction1 : Horizontal, Direction2 : Vertical
 MS Tunnel Slab Direction1 : N-S, Direction2 : E-W
 σ and σ_a are calculated and allowable stress.



HITACHI

WG3-U71-ERD-S-0004 SH NO. 527
REV. 2 of 543

Table A.2-1 Maximum Stress Ratios for Flexure and Membrane Forces: RB (Continued)

Location	Element ID	Primary Reinforcement																			
		Direction 1'									Direction 2'										
		In/Top					Out/Bottom				In/Top					Out/Bottom					
		NA3		DCD		Ratio (NA3 /DCD)	NA3		DCD		Ratio (NA3 /DCD)	NA3		DCD		Ratio (NA3 /DCD)	NA3		DCD		Ratio (NA3 /DCD)
σ/σ_a	Load ID	σ/σ_a	Load ID	σ/σ_a	Load ID		σ/σ_a	Load ID	σ/σ_a	Load ID		σ/σ_a	Load ID	σ/σ_a	Load ID		σ/σ_a	Load ID	σ/σ_a	Load ID	
24 Basemat @ Wall Below RCCV	90140	0.474	7671	0.889	7721	0.53	0.383	7672	0.411	7501	0.93	0.157	7172	0.391	7143	0.40	0.250	2515	0.343	7991	0.73
	90182	0.100	7601	0.293	7601	0.34	0.181	7921	0.377	7921	0.48	0.254	9014	0.533	7941	0.48	0.166	7491	0.221	7961	0.75
	90111	0.077	7672	0.195	7603	0.40	0.141	7581	0.236	8081	0.60	0.214	7841	0.496	7841	0.43	0.150	7821	0.366	7821	0.41
25 Slab EL4.65m @ RCCV	93140	0.427	7811	0.639	7811	0.67	0.524	7941	0.450	7941	1.17	0.406	6421	0.526	6421	0.77	0.554	8514	0.457	7482	1.21
	93182	0.205	6441	0.319	7231	0.64	0.270	8511	0.375	7441	0.72	0.257	7351	0.326	7301	0.79	0.326	8514	0.552	7482	0.59
	93111	0.218	7602	0.232	7441	0.94	0.320	8514	0.410	7482	0.78	0.235	8507	0.261	6421	0.90	0.283	8514	0.332	6421	0.85
26 Slab EL17.5m @ RCCV	96144	0.600	6971	0.741	6345	0.81	0.705	8514	0.565	7482	1.25	0.757	8508	0.930	6441	0.81	0.773	8507	0.607	7482	1.27
	96186	0.442	7431	0.643	7431	0.69	0.550	8511	0.525	7482	1.05	0.256	7103	0.297	8001	0.86	0.240	8511	0.330	7131	0.73
	96113	0.428	7102	0.320	7102	1.33	0.365	7521	0.265	7521	1.38	0.440	7103	0.439	7481	1.00	0.442	8511	0.425	7481	1.04
27 Slab EL27.0m @ RCCV	98472	0.869	8512	0.450	6001	1.93	0.518	8511	0.060	6001	8.64	0.875	8512	0.440	6001	1.99	0.514	8511	0.130	6001	3.95
	98514	0.402	8513	0.260	6001	1.54	0.291	8511	0.160	6001	1.82	0.313	8514	0.030	6001	10.42	0.216	7331	0.030	6001	7.19
	98424	0.685	7501	0.000	6001	1.00	0.436	7851	0.240	6001	1.82	0.720	8514	0.150	6001	4.80	0.404	8511	0.040	6001	10.11
28 Pool Girder @ Storage Pool	123054	0.327	8507	0.010	6001	32.66	0.631	8501	0.550	6001	1.15	0.531	7481	0.040	6001	13.28	0.721	9011	0.700	6001	1.03
	123154	0.385	8514	0.040	6001	9.64	0.724	8513	0.350	6001	2.07	0.306	7431	0.070	6001	4.37	0.385	8505	0.300	6001	1.28
29 Pool Girder @ Cavity	123062	0.295	8514	0.040	6001	7.38	0.602	7421	0.050	6001	12.03	0.298	7501	0.070	6001	4.26	0.514	6421	0.040	6001	12.84
	123182	0.432	7131	0.320	6001	1.35	0.735	7481	0.290	6001	2.53	0.165	6142	0.160	6001	1.03	0.486	6421	0.110	6001	4.42
30 Pool Girder @ Fuel Pool	123067	0.805	8506	0.310	6001	2.60	0.554	6431	0.010	6001	55.40	0.725	9005	0.310	6001	2.34	0.512	6911	0.100	6001	5.12
	123167	0.772	9005	0.390	6001	1.98	0.479	6445	0.020	6001	23.97	0.676	8505	0.410	6001	1.65	0.431	6431	0.030	6001	14.37
31 MS Tunnel Wall and Slab	150122	0.064	7501	0.053	6501	1.21	0.491	2521	0.491	2521	1.00	0.072	7421	0.071	7421	1.02	0.709	7521	0.679	7521	1.04
	96611	0.155	7101	0.227	7501	0.68	0.143	7521	0.131	7521	1.09	0.156	7851	0.117	7801	1.33	0.651	7521	0.624	7521	1.04
	98614	0.058	8514	0.073	7991	0.79	0.120	7521	0.123	7521	0.97	0.498	8511	0.050	7602	9.94	0.480	7173	0.446	7321	1.08
32 IC/PCCS Pool Wall in NS Dir.	125051	0.544	8505	0.220	6001	2.47	0.628	8512	0.170	6001	3.70	0.748	8513	0.270	6001	2.77	0.773	8512	0.230	6001	3.36
	125151	0.520	8513	0.260	6001	2.00	0.609	8512	0.220	6001	2.77	0.610	8505	0.270	6001	2.26	0.605	8512	0.220	6001	2.75
	125055	0.380	8514	0.090	6001	4.22	0.458	8512	0.090	6001	5.09	0.408	8514	0.010	6001	40.84	0.483	8512	0.110	6001	4.39
	125155	0.377	8514	0.090	6001	4.19	0.473	8512	0.090	6001	5.25	0.276	8514	0.010	6001	27.62	0.310	8512	0.000	6001	1.00

Note *: Wall Below RCCV Direction1 : Hoop, Direction2 : Vertical
Exterior Wall Direction1 : Horizontal, Direction2 : Vertical
Slab Direction1 : N-S, Direction2 : E-W
Pool Girder Direction1 : Horizontal, Direction2 : Vertical
MS Tunnel Wall Direction1 : Horizontal, Direction2 : Vertical
MS Tunnel Slab Direction1 : N-S, Direction2 : E-W
 σ and σ_a are calculated and allowable stress.



HITACHI

WG3-U71-ERD-S-0004 SH NO. 528
REV. 2 of 543

Table A.2-2 Maximum Stress Ratios for Membrane Compressive Forces: RB

Location	Element ID	Thickness h (m)	NA3				DCD				Ratio (NA3/DCD)					
			Load ID	Calculated Concrete Stress (MPa)				Load ID	Calculated Concrete Stress (MPa)				σ_x	σ_y	τ_{xy}	σ_c
				σ_x (MPa)	σ_y (MPa)	τ_{xy} (MPa)	σ_c (MPa)		σ_x (MPa)	σ_y (MPa)	τ_{xy} (MPa)	σ_c (MPa)				
18 Wall Below RCCV Bottom	6	2.0	2001	-0.782	-4.095	-0.109	-4.098	7561	-3.918	-10.104	-2.879	-11.237	0.20	0.41	0.04	0.36
	13	2.0	2001	-0.726	-3.290	0.135	-3.297	7501	-3.154	-8.716	2.071	-9.402	0.23	0.38	0.07	0.35
	24	2.0	2001	-0.609	-3.631	-0.174	-3.641	7561	-2.150	-7.952	-3.331	-9.469	0.28	0.46	0.05	0.38
19 Wall Below RCCV Mid-Height	806	2.0	2001	-0.644	-3.516	-0.150	-3.524	7561	-2.205	-8.187	-3.260	-9.620	0.29	0.43	0.05	0.37
	813	2.0	8514	-1.356	-8.182	-0.589	-8.232	7501	-2.345	-8.124	2.576	-9.106	0.58	1.01	-0.23	0.90
	824	2.0	2001	-0.975	-3.607	-0.154	-3.616	7561	-2.057	-7.647	-3.866	-9.623	0.47	0.47	0.04	0.38
20 Wall Below RCCV Top	1606	2.0	2001	-0.666	-3.213	0.125	-3.219	7501	-1.489	-6.574	3.575	-8.419	0.45	0.49	0.04	0.38
	1613	2.0	8514	1.899	-8.295	1.089	-8.410	7501	-1.255	-7.091	2.647	-8.113	-1.51	1.17	0.41	1.04
	1624	2.0	8514	2.392	-8.701	-1.389	-8.872	7561	-1.069	-6.815	-3.822	-8.723	-2.24	1.28	0.36	1.02
21 Exterior Wall @ EL-11.50 ~10.50m	20011	2.0	7501	-2.042	-3.604	-1.463	-4.482	7501	-2.017	-3.697	-5.300	-8.223	1.01	0.97	0.28	0.54
	20023	2.0	7491	-3.417	-3.098	1.686	-4.951	7491	-3.185	-4.946	1.959	-6.214	1.07	0.63	0.86	0.80
	30010	2.0	7561	-2.199	-2.171	-0.594	-2.779	7561	-2.825	-3.872	-1.958	-5.375	0.78	0.56	0.30	0.52
	30020	2.0	8511	-0.909	-2.515	-1.040	-3.026	7301	-0.861	-2.873	-0.907	-3.221	1.06	0.88	1.15	0.94
	40001	2.0	7251	-0.774	-1.862	0.866	-2.340	7301	-0.686	-3.033	0.844	-3.305	1.13	0.61	1.03	0.71
	40011	2.0	2001	-0.756	-1.676	-0.081	-1.683	7501	-2.490	-3.869	-2.216	-5.500	0.30	0.43	0.04	0.31
22 Exterior Wall @ EL4.65 ~6.60m	22011	1.5	7501	-0.914	-5.756	3.195	-7.343	7501	-1.027	-7.448	5.293	-10.428	0.89	0.77	0.60	0.70
	22023	1.5	7492	-0.563	-8.116	-4.138	-9.942	7492	-0.323	-9.243	-4.533	-11.143	1.74	0.88	0.91	0.89
	32010	1.5	7501	-0.995	-3.710	2.090	-4.845	7501	-1.143	-4.577	2.972	-6.292	0.87	0.81	0.70	0.77
	32020	1.5	7251	-0.358	-5.476	1.690	-5.984	7301	-0.178	-4.772	2.497	-5.868	2.01	1.15	0.68	1.02
	42001	1.5	7251	-0.266	-5.569	1.731	-6.084	7201	-0.164	-4.795	2.513	-5.896	1.62	1.16	0.69	1.03
	42011	1.5	7501	-1.110	-4.455	-2.491	-5.783	7501	-0.937	-4.398	-3.997	-7.022	1.18	1.01	0.62	0.82
23 Exterior Wall @ EL22.50 ~24.60m	24211	1.5	7561	-0.757	-4.344	2.536	-5.657	7561	-0.857	-4.677	3.931	-7.137	0.88	0.93	0.65	0.79
	24224	1.5	7301	-0.356	-6.929	2.634	-7.854	7301	-0.278	-6.902	2.982	-8.047	1.28	1.00	0.88	0.98
	34210	1.5	7561	-0.712	-1.899	2.346	-3.725	7561	-0.865	-1.814	2.591	-3.974	0.82	1.05	0.91	0.94
	34220	1.5	7351	0.148	-3.042	-1.481	-3.624	7301	0.157	-2.515	-1.984	-3.571	0.94	1.21	0.75	1.01
	44201	1.5	7251	0.128	-3.399	-1.736	-4.110	7561	0.140	-2.597	-2.447	-4.032	0.92	1.31	0.71	1.02

Notes: Compressive forces are negative.



HITACHI

WG3-U71-ERD-S-0004 SH NO. 529

REV. 2

of 543

Table A.2-2 Maximum Stress Ratios for Membrane Compressive Forces: RB (Continued)

Location	Element ID	Thickness h (m)	NA3					DCD					Ratio (NA3/DCD)			
			Load ID	Calculated Concrete Stress (MPa)				Load ID	Calculated Concrete Stress (MPa)							
				σ_x (MPa)	σ_y (MPa)	τ_{xy} (MPa)	σ_c (MPa)		σ_x (MPa)	σ_y (MPa)	τ_{xy} (MPa)	σ_c (MPa)	σ_x	σ_y	τ_{xy}	σ_c
24 Basemat	90140	4.0	7151	-1.520	-0.942	0.554	-1.855	7102	-1.073	-1.944	0.986	-2.587	1.42	0.48	0.56	0.72
@ Wall	90182	4.0	2001	-0.874	-0.671	-0.031	-0.879	7501	-2.382	-0.901	-0.414	-2.490	0.37	0.75	0.08	0.35
Below RCCV	90111	4.0	2001	-1.012	-0.789	0.009	-1.013	7561	-1.296	-2.191	0.247	-2.254	0.78	0.36	0.04	0.45
25 Slab	93140	1.0	8514	-2.967	0.452	3.622	-5.263	7482	-3.388	0.551	3.561	-5.488	0.88	0.82	1.02	0.96
EL4.65m	93182	1.0	8511	1.567	-4.979	-0.427	-5.007	7421	2.108	-5.472	-0.717	-5.540	0.74	0.91	0.60	0.90
@ RCCV	93111	1.0	7421	-4.428	1.759	-0.287	-4.441	7421	-4.862	2.024	-0.343	-4.879	0.91	0.87	0.84	0.91
26 Slab	96144	1.0	8508	0.111	0.762	4.690	-4.265	7241	-0.852	0.797	4.149	-4.258	-0.13	0.96	1.13	1.00
EL17.5m	96186	1.0	8514	2.343	-6.951	-2.172	-7.434	7271	2.808	-5.664	-1.755	-6.014	0.83	1.23	1.24	1.24
@ RCCV	96113	1.6	6483	-6.247	1.715	-0.989	-6.368	7482	-6.240	1.993	-1.143	-6.396	1.00	0.86	0.87	1.00
27 Slab	98472	1.5	8513	-7.205	-4.058	8.391	-14.169	7003	-7.459	-4.269	8.549	-14.560	0.97	0.95	0.98	0.97
EL27.0m	98514	1.5	8511	2.676	-3.621	-1.566	-3.989	7001	2.714	-3.750	-1.635	-4.140	0.99	0.97	0.96	0.96
@ RCCV	98424	2.4	8512	-12.124	0.878	-2.453	-12.572	7002	-11.003	-1.373	-3.491	-12.136	1.10	-0.64	0.70	1.04
28 Pool Girder	123054	1.6	8512	-0.826	-9.380	1.591	-9.666	7002	-0.789	-8.983	1.450	-9.232	1.05	1.04	1.10	1.05
@ Storage Pool	123154	1.6	8512	-1.766	-3.583	2.562	-5.393	7002	-1.752	-3.509	2.530	-5.309	1.01	1.02	1.01	1.02
29 Pool Girder	123062	1.6	8513	-2.322	-5.926	-1.098	-6.235	7003	-2.351	-5.915	-1.032	-6.192	0.99	1.00	1.06	1.01
@ Cavity	123162	1.6	8513	-2.134	-4.689	-3.002	-6.674	7003	-1.964	-4.725	-2.980	-6.629	1.09	0.99	1.01	1.01
30 Pool Girder	123067	1.6	8511	-2.683	-7.409	-4.312	-9.962	7001	-2.754	-7.355	-4.082	-9.740	0.97	1.01	1.06	1.02
@ Fuel Pool	123167	1.6	8511	-2.386	-3.236	-4.057	-6.890	7142	-2.449	-2.151	-2.916	-5.220	0.97	1.50	1.39	1.32
31 MS Tunnel	150122	1.3	2021	-0.021	-0.429	1.150	-1.393	2021	-0.020	-0.425	1.147	-1.388	1.02	1.01	1.00	1.00
Wall and Slab	96611	1.6	8511	-0.464	1.453	-0.052	-0.465	7421	-0.412	1.453	-0.069	-0.415	1.13	1.00	0.75	1.12
	98614	2.4	8512	-0.752	1.072	-0.282	-0.795	7481	0.025	-0.518	0.026	-0.519	-30.60	-2.07	-10.74	1.53
32 IC/PCCS	125051	1.0	7501	-0.260	-2.951	-2.191	-4.177	7004	0.673	-3.220	2.227	-4.231	-0.39	0.92	-0.98	0.99
Pool Wall	125151	1.0	7441	-2.048	-2.214	3.305	-5.437	7001	-1.707	-1.762	2.841	-4.576	1.20	1.26	1.16	1.19
in NS Dir.	125055	1.0	8513	-5.767	-0.210	-0.799	-5.879	7003	-5.873	-0.161	-0.758	-5.972	0.98	1.31	1.05	0.98
	125155	1.0	8513	-6.767	-0.414	-0.774	-6.860	7003	-6.723	-0.380	-0.731	-6.807	1.01	1.09	1.06	1.01

Notes: Compressive forces are negative.



HITACHI

WG3-U71-ERD-S-0004 SH NO. 530

REV. 2

of 543

Table A.2-2 Maximum Stress Ratios for Membrane Compressive Forces: RB (Continued)

Location	Element ID	Thickness h (m)	NA3			DCD			Ratio (NA3/DCD)
			Load ID	Allowable Stress σ_s (MPa)	σ_c/σ_s	Load ID	Allowable Stress σ_s (MPa)	σ_c/σ_s	
18 Wall Below RCCV Bottom	6	2.0	2001	-10.4	0.396	7561	-20.7	0.543	0.729
	13	2.0	2001	-10.4	0.319	7501	-20.7	0.454	0.701
	24	2.0	2001	-10.4	0.352	7561	-20.7	0.457	0.769
19 Wall Below RCCV Mid-Height	806	2.0	2001	-10.4	0.340	7561	-20.7	0.465	0.733
	813	2.0	8514	-25.9	0.318	7501	-20.7	0.440	0.723
	824	2.0	2001	-10.4	0.349	7561	-20.7	0.465	0.752
20 Wall Below RCCV Top	1606	2.0	2001	-10.4	0.311	7501	-20.7	0.407	0.765
	1613	2.0	8514	-25.9	0.325	7501	-20.7	0.392	0.829
	1624	2.0	8514	-25.9	0.343	7561	-20.7	0.421	0.814
21 Exterior Wall @ EL.11.50 ~10.50m	20011	2.0	7501	-20.7	0.217	7501	-20.7	0.397	0.545
	20023	2.0	7491	-25.9	0.191	7491	-25.9	0.240	0.797
	30010	2.0	7561	-20.7	0.134	7561	-20.7	0.260	0.517
	30020	2.0	8511	-25.9	0.117	7301	-20.7	0.156	0.751
	40001	2.0	7251	-20.7	0.113	7301	-20.7	0.160	0.708
	40011	2.0	2001	-10.4	0.163	7501	-20.7	0.266	0.612
22 Exterior Wall @ EL.4.65 ~6.60m	22011	1.5	7501	-20.7	0.355	7501	-20.7	0.504	0.704
	22023	1.5	7492	-25.9	0.384	7492	-25.9	0.431	0.892
	32010	1.5	7501	-20.7	0.234	7501	-20.7	0.304	0.770
	32020	1.5	7251	-20.7	0.289	7301	-20.7	0.283	1.020
	42001	1.5	7251	-20.7	0.294	7201	-20.7	0.285	1.032
	42011	1.5	7501	-20.7	0.279	7501	-20.7	0.339	0.824
23 Exterior Wall @ EL.22.50 ~24.60m	24211	1.5	7561	-20.7	0.273	7561	-20.7	0.345	0.793
	24224	1.5	7301	-20.7	0.379	7301	-20.7	0.389	0.976
	34210	1.5	7561	-20.7	0.180	7561	-20.7	0.192	0.938
	34220	1.5	7351	-20.7	0.175	7301	-20.7	0.173	1.015
	44201	1.5	7251	-20.7	0.199	7561	-20.7	0.195	1.019

Notes: Compressive forces are negative.



HITACHI

WG3-U71-ERD-S-0004 SH NO. 531

REV. 2

of 543

Table A.2-2 Maximum Stress Ratios for Membrane Compressive Forces: RB (Continued)

Location	Element ID	Thickness h (m)	NA3			DCD			Ratio (NA3/DCD)
			Load ID	Allowable Stress σ_a (MPa)	σ_c/σ_a	Load ID	Allowable Stress σ_a (MPa)	σ_c/σ_a	
24 Basement @ Wall Below RCCV	90140	4.0	7151	-16.6	0.112	7102	-16.6	0.156	0.717
	90182	4.0	2001	-8.3	0.106	7501	-16.6	0.150	0.706
	90111	4.0	2001	-8.3	0.122	7561	-16.6	0.136	0.898
25 Slab EL4.65m @ RCCV	93140	1.0	8514	-25.9	0.203	7482	-25.9	0.212	0.959
	93182	1.0	8511	-25.9	0.193	7421	-25.9	0.214	0.904
	93111	1.0	7421	-25.9	0.172	7421	-25.9	0.189	0.910
26 Slab EL17.5m @ RCCV	96144	1.0	8508	-25.9	0.165	7241	-25.9	0.165	1.002
	96186	1.0	8514	-25.9	0.287	7271	-25.9	0.232	1.236
	96113	1.6	6483	-25.9	0.246	7482	-25.9	0.247	0.996
27 Slab EL27.0m @ RCCV	98472	1.5	8513	-25.9	0.548	7003	-25.9	0.563	0.973
	98514	1.5	8511	-25.9	0.154	7001	-25.9	0.160	0.963
	98424	2.4	8512	-25.9	0.486	7002	-25.9	0.469	1.036
28 Pool Girder @ Storage Pool	123054	1.6	8512	-25.9	0.374	7002	-25.9	0.357	1.046
	123154	1.6	8512	-25.9	0.208	7002	-25.9	0.205	1.017
29 Pool Girder @ Cavity	123062	1.6	8513	-25.9	0.241	7003	-25.9	0.239	1.008
	123162	1.6	8513	-25.9	0.258	7003	-25.9	0.256	1.008
30 Pool Girder @ Fuel Pool	123067	1.6	8511	-25.9	0.385	7001	-25.9	0.376	1.024
	123167	1.6	8511	-25.9	0.266	7001	-25.9	0.267	0.997
31 MS Tunnel Wall and Slab	150122	1.3	2021	-15.5	0.090	2021	-15.5	0.089	1.004
	96611	1.6	8511	-25.9	0.018	7421	-25.9	0.016	1.122
	98614	2.4	8512	-25.9	0.031	7481	-25.9	0.020	1.530
32 IC/PCCS Pool Wall in NS Dir.	125051	1.0	7501	-20.7	0.202	7004	-25.9	0.164	1.230
	125151	1.0	7441	-25.9	0.210	7001	-25.9	0.177	1.187
	125055	1.0	8513	-25.9	0.227	7003	-25.9	0.231	0.984
	125155	1.0	8513	-25.9	0.265	7003	-25.9	0.263	1.008

Notes: Compressive forces are negative.



HITACHI

WG3-U71-ERD-S-0004 SH NO. 532

REV. 2

of 543

Table A.2-3 Calculation Results for Maximum Transverse Shear: RB

Location	Element ID	NA3			DCD			NA3					DCD					Ratio (NA3/DCD)				
		Load ID	d (m)	p _v (%)	Load ID	d (m)	p _v (%)	Shear Force (MN/m)					Shear Force (MN/m)					Shear Force				
								V _u	V _c	V _s	φV _n	V _u /φV _n	V _u	V _c	V _s	φV _n	V _u /φV _n	V _u	V _c	V _s	φV _n	V _u /φV _n
18 Wall Below RCCV Bottom	6	7461	1.62	0.721	7642	1.59	0.721	2.16	4.96	4.84	8.33	0.259	2.72	0.00	4.73	4.02	0.677	0.79	1.00	1.02	2.07	0.38
	13	7461	1.62	0.721	7623	1.59	0.721	2.24	4.82	4.84	8.21	0.273	2.08	0.43	4.73	4.39	0.474	1.08	11.24	1.02	1.87	0.58
	24	7501	1.59	0.721	7611	1.62	0.721	2.30	4.63	4.73	7.95	0.289	0.94	0.52	4.83	4.55	0.207	2.44	8.92	0.98	1.75	1.40
19 Wall Below Below RCCV Mid-Height	806	7992	1.57	0.270	7601	1.55	0.270	0.12	0.15	1.75	1.61	0.077	0.19	0.22	1.73	1.66	0.115	0.65	0.65	1.02	0.97	0.67
	813	8514	1.57	0.270	7603	1.54	0.270	0.91	4.86	1.75	5.62	0.162	0.34	0.00	1.71	1.46	0.230	2.70	1.00	1.02	3.86	0.70
	824	8514	1.57	0.270	7601	1.54	0.270	1.02	5.00	1.75	5.74	0.177	0.19	0.22	1.72	1.65	0.114	5.38	22.52	1.02	3.47	1.55
20 Wall Below RCCV Top	1606	6421	1.57	0.540	7921	1.57	0.540	4.05	4.00	3.50	6.37	0.635	2.69	1.43	3.50	4.18	0.642	1.51	2.80	1.00	1.52	0.99
	1613	6471	1.57	0.540	7821	1.57	0.540	4.68	4.24	3.50	6.57	0.712	2.32	1.36	3.50	4.13	0.562	2.02	3.12	1.00	1.59	1.27
	1624	8507	1.57	0.540	7941	1.57	0.540	5.07	4.37	3.50	6.69	0.759	3.41	2.34	3.50	4.96	0.689	1.49	1.87	1.00	1.35	1.10
21 Exterior Wall @ EL-11.50 ~10.50m	20011	8512	1.63	0.484	7441	1.63	0.484	1.87	0.64	3.27	3.32	0.562	3.81	1.96	3.27	4.44	0.856	0.49	0.33	1.00	0.75	0.66
	20023	8514	1.58	0.484	7441	1.59	0.484	1.46	1.85	3.15	4.25	0.342	2.06	3.31	3.18	5.52	0.373	0.71	0.56	0.99	0.77	0.92
	30010	7511	1.68	0.710	7941	1.65	0.177	1.63	2.33	4.93	6.17	0.265	0.83	0.59	1.21	1.53	0.543	1.97	3.93	4.08	4.03	0.49
	30020	7511	1.69	0.710	7241	1.69	0.177	1.20	3.52	4.96	7.21	0.166	0.82	3.26	1.24	3.82	0.214	1.46	1.08	4.01	1.89	0.77
	40001	7571	1.70	0.710	7241	1.73	0.177	1.44	2.08	4.98	6.00	0.239	1.07	3.52	1.27	4.07	0.262	1.35	0.59	3.93	1.47	0.91
	40011	7501	1.69	0.710	7741	1.73	0.177	2.46	3.91	4.97	7.55	0.325	0.16	0.19	1.27	1.24	0.128	15.49	20.87	3.92	6.10	2.54
22 Exterior Wall @ EL4.65 ~6.60m	22011	8514	1.15	0.484	7441	1.19	0.484	1.00	0.00	2.31	1.96	0.513	1.11	0.00	2.38	2.02	0.549	0.90	1.00	0.97	0.97	0.93
	22023	9014	1.16	0.484	7241	1.18	0.484	0.71	1.10	2.33	2.92	0.242	0.75	3.71	2.36	5.16	0.146	0.94	0.30	0.99	0.57	1.66
	32010	8514	1.09	0.177	7441	1.24	0.177	0.36	0.00	0.80	0.68	0.524	0.33	0.00	0.91	0.77	0.424	1.09	1.00	0.88	0.88	1.24
	32020	6435	1.25	0.177	6241	1.24	0.177	0.25	0.29	0.91	1.02	0.242	0.11	0.13	0.90	0.88	0.123	2.30	2.30	1.01	1.17	1.96
	42001	7411	1.25	0.242	4021	1.19	0.242	0.84	0.85	1.25	1.79	0.468	0.18	0.21	1.19	1.19	0.150	4.71	4.06	1.06	1.51	3.13
	42011	7711	1.09	0.242	4021	1.22	0.242	0.29	0.27	1.09	1.16	0.252	0.03	0.04	1.22	1.07	0.031	8.92	6.99	0.90	1.09	8.21
23 Exterior Wall @ EL22.50 ~24.60m	24211	8511	1.09	0.968	7241	1.15	0.484	2.78	0.00	4.25	3.61	0.771	1.50	0.00	2.30	1.96	0.769	1.85	1.00	1.85	1.85	1.00
	24224	7211	1.10	0.484	7441	1.19	0.968	1.79	0.00	2.21	1.88	0.954	1.30	0.02	4.65	3.97	0.327	1.38	0.00	0.47	0.47	2.91
	34210	8512	1.09	0.177	7441	1.24	0.177	0.52	0.00	0.80	0.68	0.761	0.26	0.00	0.91	0.77	0.340	1.97	1.00	0.88	0.88	2.24
	34220	8503	1.26	0.710	6241	1.26	0.710	1.21	0.94	3.69	3.93	0.308	0.24	0.28	3.69	3.37	0.070	5.14	3.40	1.00	1.17	4.40
	44201	4021	1.26	0.968	4021	1.26	0.968	2.40	0.95	4.89	4.96	0.483	2.41	0.95	4.89	4.96	0.485	1.00	1.00	1.00	1.00	1.00
	90140	7571	3.53	0.801	7441	3.53	0.801	6.36	4.46	11.69	13.73	0.463	10.74	7.16	11.69	16.03	0.670	0.59	0.62	1.00	0.86	0.69
24 Basemat @ Wall Below RCCV	90182	7331	3.51	0.801	7441	3.51	0.801	5.34	5.96	11.63	14.95	0.357	7.41	6.13	11.64	15.10	0.491	0.72	0.97	1.00	0.99	0.73
	90111	8514	3.55	0.801	7941	3.37	0.801	5.12	6.17	11.76	15.24	0.336	2.64	1.67	11.15	10.90	0.242	1.94	3.70	1.05	1.40	1.39
	93140	8514	0.80	0.500	7441	1.00	0.500	0.30	0.22	1.65	1.59	0.192	0.37	0.27	2.07	1.99	0.184	0.83	0.81	0.80	0.80	1.04
25 Slab EL4.65m @ RCCV	93182	8514	0.80	0.500	7441	1.00	0.500	2.30	1.36	1.65	2.56	0.899	2.54	1.57	2.07	3.09	0.822	0.90	0.86	0.80	0.83	1.09
	93111	8514	0.80	0.500	7441	1.00	0.500	1.97	1.24	1.65	2.46	0.800	1.84	1.57	2.07	3.09	0.594	1.07	0.79	0.80	0.80	1.35
	96144	7103	0.80	0.500	7741	0.80	0.500	0.32	0.82	1.65	2.10	0.153	0.07	0.08	1.65	1.47	0.046	4.73	10.18	1.00	1.43	3.31
26 Slab EL17.5m @ RCCV	96186	8511	0.80	0.500	7441	1.00	0.500	1.41	2.18	1.65	3.25	0.432	1.15	2.68	2.07	4.03	0.286	1.22	0.81	0.80	0.81	1.51
	96113	7492	1.34	0.500	4021	1.34	0.500	1.75	1.59	2.76	3.69	0.474	0.82	1.54	2.76	3.66	0.225	2.13	1.03	1.00	1.01	2.11
	98472	8513	1.21	0.968	7504	1.21	0.968	3.50	4.56	4.73	7.90	0.443	1.41	0.58	4.72	4.50	0.314	2.48	7.87	1.00	1.76	1.41
27 Slab EL27.0m @ RCCV	98514	8514	1.21	0.968	7004	1.21	0.968	3.49	1.88	4.72	5.61	0.623	3.50	1.95	4.72	5.67	0.617	1.00	0.96	1.00	0.99	1.01
	98424	8512	1.95	0.968	7002	2.11	0.968	10.86	7.00	7.62	12.42	0.874	10.27	7.08	8.23	13.01	0.789	1.06	0.99	0.93	0.95	1.11



HITACHI

WG3-U71-ERD-S-0004 SH NO. 533
REV. 2 of 543

Table A.2-3 Calculation Results for Maximum Transverse Shear: RB (Continued)

Location	Element ID	NA3			DCD			NA3					DCD					Ratio (NA3/DCD)				
		Load ID	d (m)	p _v (%)	Load ID	d (m)	p _v (%)	Shear Force (MN/m)				V _u /φV _n	Shear Force (MN/m)				V _u /φV _n	Shear Force				V _u /φV _n
								V _u	V _c	V _s	φV _n		V _u	V _c	V _s	φV _n		V _u	V _c	V _s	φV _n	
28 Pool Girder @ Storage Pool	123054	9011	1.25	0.484	7501	1.25	0.484	1.25	1.35	2.50	3.28	0.382	1.20	1.41	2.50	3.32	0.362	1.04	0.96	1.00	0.99	1.06
	123154	8503	1.25	0.484	6002	1.25	0.484	0.94	1.40	2.50	3.32	0.284	0.94	1.38	2.50	3.30	0.285	1.00	1.01	1.00	1.01	1.00
29 Pool Girder @ Cavity	123062	7361	1.25	0.242	7504	1.22	0.242	0.43	1.30	1.25	2.17	0.200	0.12	0.14	1.22	1.15	0.101	3.61	9.30	1.02	1.88	1.98
	123162	7331	1.23	0.242	6004	1.23	0.242	0.30	0.33	1.23	1.32	0.224	0.05	0.06	1.23	1.10	0.044	5.90	5.45	1.00	1.20	5.08
30 Pool Girder @ Fuel Pool	123067	7441	1.28	0.484	7502	1.24	0.484	1.02	4.00	2.57	5.58	0.182	0.10	0.12	2.49	2.21	0.046	10.17	33.35	1.03	2.53	3.96
	123167	8513	1.24	0.484	6001	1.27	0.484	0.75	0.98	2.48	2.94	0.254	0.21	0.25	2.55	2.38	0.089	3.55	3.93	0.97	1.24	2.85
31 MS Tunnel Wall and Slab	150122	8512	1.06	0.177	7741	1.04	0.177	0.53	0.73	0.78	1.28	0.416	0.04	0.04	0.76	0.68	0.053	14.81	17.45	1.02	1.87	7.92
	96611	8514	1.34	0.500	7241	1.34	0.500	0.62	1.65	2.76	3.75	0.166	0.47	1.60	2.76	3.70	0.126	1.33	1.03	1.00	1.01	1.32
	98614	8511	1.95	0.500	7941	2.14	0.500	1.44	3.51	4.04	6.41	0.224	0.23	0.27	4.42	3.99	0.058	6.18	12.84	0.91	1.61	3.84
32 IC/PCCS Pool Wall in NS Direction	125051	8512	0.81	0.250	7004	0.81	0.250	0.28	0.82	0.83	1.41	0.201	0.12	0.14	0.84	0.83	0.139	2.35	5.86	0.99	1.69	1.44
	125151	8513	0.82	0.250	6001	0.80	0.250	0.24	0.49	0.85	1.13	0.209	0.12	0.14	0.83	0.83	0.148	1.98	3.47	1.02	1.37	1.42
	125055	8514	0.80	0.250	7502	0.79	0.250	0.34	0.65	0.83	1.25	0.275	0.08	0.10	0.82	0.78	0.105	4.30	6.48	1.01	1.61	2.62
	125155	8512	0.79	0.250	6004	0.83	0.250	0.29	0.71	0.82	1.30	0.221	0.05	0.06	0.86	0.78	0.061	5.75	11.88	0.95	1.67	3.62



HITACHI

WG3-U71-ERD-S-0004 SH NO. 534

REV. 2

of 543

APPENDIX B

IN-PLANE SHEAR CHECK FOR RB ACCORDING TO ACI 349-01



Table of Contents

B.1	SCOPE.....	536
B.2	IN-PLANE SHEAR CHECK	536
B.3	CONCLUSION.....	536

List of Tables

Table B-1	Maximum Stress Ratios for In-Plane Shear Check	537
Table B-2	In-Plane Shear Check for Entire Wall	538

List of Figures

Figure B-1	Selected Elements for In-plane Shear Check on Entire Wall.....	539
------------	--	-----



B.1 SCOPE

This appendix describes In-plane Shear Check for the RB according to ACI 349-01.

B.2 IN-PLANE SHEAR CHECK

According to ACI 349-01 Section 21.6.5.2, the maximum shear strength of a horizontal wall segment per unit length is calculated as follows:

$$V_n = (2\sqrt{f'_c} + \rho_n f_y)h \quad (\text{lb/in})$$

Where, h is wall thickness.

Shear strength calculated above shall not be taken greater than the following equation specified in ACI 349-01 Section 21.6.5.6.

$$V_{n_{\max}} = 8\sqrt{f'_c}h \quad (\text{lb/in})$$

Although $10\sqrt{f'_c}h$ is used for the strength of individual wall piers according to Sections 21.6.5.6 and 21.6.5.7 of ACI 349-01, the capacity $8\sqrt{f'_c}h$ for combined strength of wall piers on a wall line according to Section 21.6.5.6 of ACI 349-01 is conservatively used.

The reduction of thermal stresses due to the decreased stiffness of a cracked concrete section is considered as described in Section 6.4.1.1.

B.3 CONCLUSION

The results of in-plane shear check for the selected elements are shown in Table B-1. For Element 22023 in the exterior wall and Element 125151 in IC/PCCS Pool wall, the element shear demands N_{xy} are larger than the allowable shear strength evaluated above.

Since ACI 349-01 in-plane shear stress check for walls is developed for the entire wall and not meant for local checks, the stress check by looking at the entire walls as highlighted in Figure B-1 is performed instead of the stress check on one element.

The results of in-plane shear check on the entire walls are shown in Table B-2 and in-plane shear stresses are confirmed to be lower than the allowable stress.



Table B-1 Maximum Stress Ratios for In-Plane Shear Check

Location	Element ID	Load Case	N_{xy} (MN/m)	Thickness h (m)	Primary Reinforcement Ratio	Allowable* Shear Strength $\phi V_n = \phi 8 f_c^{0.5} h$ (MN/m)	$N_{xy}/\phi V_n$
18 Wall Below RCCV Bottom	6	8514	2.065	2.0	2.150%	6.630	0.311
	13	7471	1.540	2.0	2.150%	6.630	0.232
	24	7491	1.463	2.0	2.150%	6.630	0.221
19 Wall Below RCCV Mid-Height	806	7251	1.458	2.0	2.150%	6.630	0.220
	813	7271	1.340	2.0	2.150%	6.630	0.202
	824	8512	1.916	2.0	2.150%	6.630	0.289
20 Wall Below RCCV Top	1606	7492	2.915	2.0	2.150%	6.630	0.440
	1613	7491	2.410	2.0	2.150%	6.630	0.363
	1624	7492	2.821	2.0	2.150%	6.630	0.425
21 Exterior Wall @ EL-11.50 ~10.50m	20011	7251	2.974	2.0	2.264%	6.630	0.449
	20023	7491	3.372	2.0	2.264%	6.630	0.509
	30010	8511	1.329	2.0	2.768%	6.630	0.200
	30020	8511	2.079	2.0	2.768%	6.630	0.314
	40001	7461	2.051	2.0	2.768%	6.630	0.309
	40011	7201	1.359	2.0	2.768%	6.630	0.205
22 Exterior Wall @ EL4.65 ~6.60m	22011	7511	4.965	1.5	2.348%	4.973	0.998
	22023	7492	6.207	1.5	2.348%	4.973	1.248
	32010	7161	3.294	1.5	2.683%	4.973	0.662
	32020	7123	3.042	1.5	2.012%	4.973	0.612
	42001	7511	2.990	1.5	2.348%	4.973	0.601
	42011	7163	3.797	1.5	2.683%	4.973	0.764
23 Exterior Wall @ EL22.50 ~24.60m	24211	7571	3.818	1.5	2.348%	4.973	0.768
	24224	7421	4.595	1.5	2.348%	4.973	0.924
	34210	7211	3.545	1.5	2.683%	4.973	0.713
	34220	7471	2.912	1.5	2.012%	4.973	0.586
	44201	7561	2.791	1.5	2.348%	4.973	0.561
32 IC/PCCS Pool Wall in NS Dir.	125051	8514	2.557	1.0	1.761%	3.315	0.771
	125151	7441	3.305	1.0	1.761%	3.202	1.032
	125055	7461	0.585	1.0	1.761%	3.202	0.183
	125155	7411	0.495	1.0	1.761%	3.202	0.155

Note: Exceedance is highlighted.

* The reduction of concrete strength due to high temperature described in Section 6.4.1.1 is considered.



HITACHI

WG3-U71-ERD-S-0004 SH NO. 538


REV. 2

of 543


Table B-2 In-Plane Shear Check for Entire Wall

Critical Load Case	Location	Element	Element Length	Element Thickness	Shear Area of Element	Shear Area of Wall	Element Shear Force in Unit Length	Element Shear Force	Total Shear Force	Average Shear Stress	Allowable* Shear Stress	τ / τ_a
			L_i (m)	T_i (m)	A_i (m ²)	A_s (m ²)	Q_i (MN/m)	Q (MN)	Q_t (MN)	τ (MN/m ²)	τ_a (MN/m ²)	
7251	Exterior Wall @EL 4.65 ~6.60m	22001	2.50	1.50	3.75		3.677	9.193				
		22002	2.00	1.50	3.00		3.970	7.940				
		22003	2.30	1.50	3.45		4.061	9.340				
		22004	1.60	1.50	2.40		4.113	6.581				
		22005	2.30	1.50	3.45		4.036	9.283				
		22006	2.20	1.50	3.30		3.917	8.617				
		22007	1.60	1.50	2.40		3.622	5.795				
		22008	2.80	1.50	4.20		3.523	9.868				
		22009	2.60	1.50	3.90		4.697	12.208				
		22010	1.50	1.50	2.25		5.367	8.051				
		22011	2.10	1.50	3.15		4.785	10.049				
		22012	1.40	1.50	2.10		4.076	5.706				
		22013	1.40	1.50	2.10		3.978	5.569				
		22014	2.05	1.50	3.08		4.217	8.645				
		22015	2.05	1.50	3.08		4.053	8.309				
		22016	2.10	1.50	3.15		3.633	7.629				
		22017	2.00	1.50	3.00		3.686	7.372				
		22018	2.05	1.50	3.08		3.860	7.913				
		22019	1.80	1.50	2.70		4.748	8.546				
		22020	1.85	1.50	2.78		4.371	8.086				
		22021	2.30	1.50	3.45		4.330	9.959				
		22022	2.00	1.50	3.00		3.832	7.664				
		22023	2.50	1.50	3.75	70.50	3.471	8.678	191.000	2.709	3.315	0.817
7361	32 IC/PCCS Pool Wall in NS Dir.	125151	3.72	1.00	3.72		2.652	9.871				
		125152	2.38	1.00	2.38		1.723	4.097				
		125153	3.10	1.00	3.10		1.509	4.678				
		125154	2.80	1.00	2.80		0.380	1.064				
		125155	2.80	1.00	2.80		0.405	1.134				
		125156	3.10	1.00	3.10		0.386	1.197				
		125157	2.38	1.00	2.38		0.262	0.623				
		125158	3.72	1.00	3.72	24.00	0.022	0.082	22.745	0.948	3.202	0.296

* The reduction of concrete strength due to high temperature described in Section 6.4.1.1 is considered.

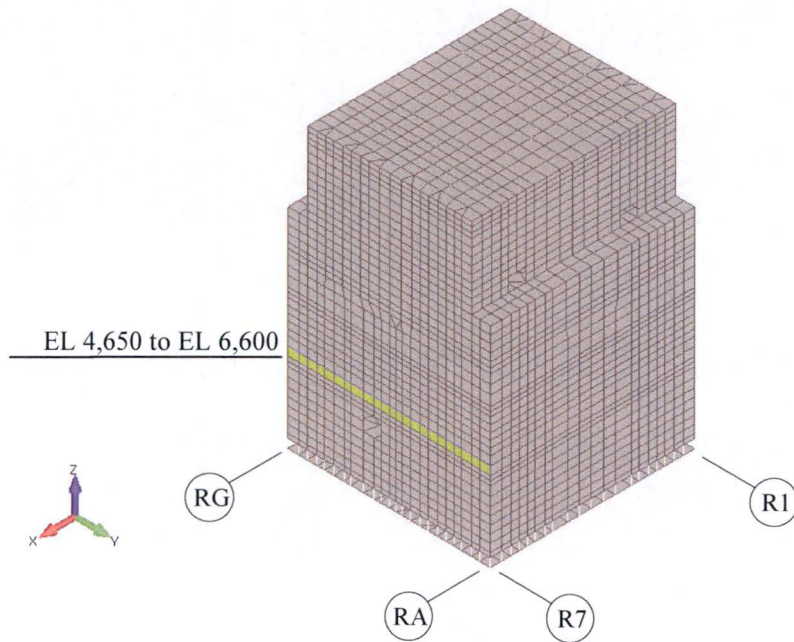

(a) Exterior Wall

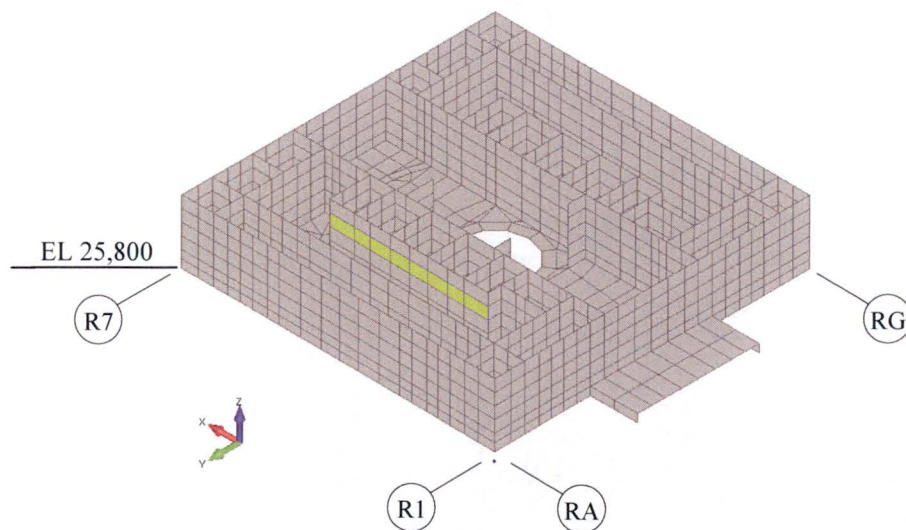

(b) IC/PCCS Pool Wall

Figure B-1 Selected Elements for In-plane Shear Check on Entire Wall



HITACHI

WG3-U71-ERD-S-0004	SH NO. 540
REV. 2	of 543

APPENDIX C

COMPRESSION LIMIT CHECK FOR RB ACCORDING TO ACI 349-01



Table of Contents

C.1	SCOPE	542
C.2	MEMBRANE COMPRESSIVE FORCE CHECK	542
C.3	CONCLUSION	542

List of Tables

Table C-1	Membrane Compressive Stress Check According to ACI 349-01	543
-----------	---	-----

List of Figures

None

**C.1 SCOPE**

This appendix describes Membrane Compressive Force Check for the RB according to ACI 349-01.

C.2 MEMBRANE COMPRESSIVE FORCE CHECK

According to ACI 349-01 Section 10.3.5.2, design axial load strength of compression members shall not be taken greater than the following:

$$\phi P_{n(\max)} = 0.80\phi \left[0.85f'_c (A_g - A_{st}) + f_y A_{st} \right]$$

Where, A_g and A_{st} are gross area and total cross-sectional area of reinforcement of section.

C.3 CONCLUSION

The results of compression force check are shown in Table C-1. It is confirmed that the calculated compression force are less than the allowable compression force evaluated based on the above strength.



Table C-1 Membrane Compressive Stress Check According to ACI 349-01

Location	Element ID	Load ID	Section Forces (MN/m)			Thickness h (m)	Calculated Concrete Stress (MPa)				Allowable Stress σ_a (MPa)	σ_c/σ_a
			N_x	N_y	N_{xy}		σ_x	σ_y	τ_{xy}	σ_c		
18 Wall Below RCCV Bottom	6	7511	-9.007	-15.344	1.483	2.0	-4.503	-7.672	0.742	-7.837	-21.0	0.372
	13	8514	-4.543	-16.272	-1.536	2.0	-2.272	-8.136	-0.768	-8.235	-21.0	0.391
	24	8514	-3.941	-17.188	1.318	2.0	-1.971	-8.594	0.659	-8.659	-21.0	0.411
19 Wall Below RCCV Mid-Height	806	8514	2.754	-14.914	-1.406	2.0	1.377	-7.457	-0.703	-7.513	-21.0	0.357
	813	8514	-2.711	-16.363	-1.177	2.0	-1.356	-8.182	-0.589	-8.232	-21.0	0.391
	824	8514	-3.317	-17.222	1.914	2.0	-1.658	-8.611	0.957	-8.740	-21.0	0.415
20 Wall Below RCCV Top	1606	8514	4.675	-14.954	-2.829	2.0	2.337	-7.477	-1.414	-7.677	-21.0	0.365
	1613	8514	3.797	-16.590	2.179	2.0	1.899	-8.295	1.089	-8.410	-21.0	0.400
	1624	8514	4.784	-17.402	-2.777	2.0	2.392	-8.701	-1.389	-8.872	-21.0	0.422
21 Exterior Wall @ EL-11.50 ~10.50m	20011	7571	-8.686	-6.792	-2.505	2.0	-4.343	-3.396	-1.252	-5.209	-21.3	0.245
	20023	7491	-6.833	-6.195	3.372	2.0	-3.417	-3.098	1.686	-4.951	-21.3	0.233
	30010	7561	-4.398	-4.341	-1.189	2.0	-2.199	-2.171	-0.594	-2.779	-22.4	0.124
	30020	8511	-1.819	-5.030	-2.079	2.0	-0.909	-2.515	-1.040	-3.026	-22.4	0.135
	40001	8511	-1.600	-4.909	1.906	2.0	-0.800	-2.455	0.953	-2.889	-22.4	0.129
	40011	7501	-2.912	-5.665	-1.326	2.0	-1.456	-2.833	-0.663	-3.100	-22.4	0.139
22 Exterior Wall @ EL4.65 ~6.60m	22011	7511	-1.362	-9.224	4.965	1.5	-0.908	-6.149	3.310	-7.750	-21.5	0.361
	22023	7492	-0.844	-12.174	-6.207	1.5	-0.563	-8.116	-4.138	-9.942	-21.5	0.463
	32010	7501	-1.492	-5.565	3.134	1.5	-0.995	-3.710	2.090	-4.845	-22.2	0.218
	32020	7251	-0.538	-8.214	2.536	1.5	-0.358	-5.476	1.690	-5.984	-20.8	0.288
	42001	7251	-0.399	-8.353	2.597	1.5	-0.266	-5.569	1.731	-6.084	-21.5	0.283
	42011	7501	-1.665	-6.683	-3.737	1.5	-1.110	-4.455	-2.491	-5.783	-22.2	0.261
23 Exterior Wall @ EL22.50 ~24.60m	24211	7561	-1.136	-6.516	3.804	1.5	-0.757	-4.344	2.536	-5.657	-21.5	0.263
	24224	7301	-0.534	-10.393	3.951	1.5	-0.356	-6.929	2.634	-7.854	-21.5	0.366
	34210	7561	-1.067	-2.848	3.519	1.5	-0.712	-1.899	2.346	-3.725	-22.2	0.168
	34220	7351	0.222	-4.563	-2.222	1.5	0.148	-3.042	-1.481	-3.624	-20.8	0.175
24 Basemat @ Wall Below RCCV	44201	7251	0.193	-5.099	-2.604	1.5	0.128	-3.399	-1.736	-4.110	-21.5	0.191
	90140	7471	-5.494	-2.575	3.677	4.0	-1.374	-0.644	0.919	-1.998	-15.4	0.130
	90182	7501	-5.535	-2.994	-1.500	4.0	-1.384	-0.748	-0.375	-1.558	-15.4	0.101
	90111	2500	-6.661	-4.652	0.034	4.0	-1.665	-1.163	0.009	-1.665	-15.4	0.108
25 Slab EL4.65m @ RCCV	93140	8514	-2.967	0.452	3.622	1.0	-2.967	0.452	3.622	-5.263	-20.8	0.254
	93182	8511	1.567	-4.979	-0.427	1.0	1.567	-4.979	-0.427	-5.007	-20.8	0.241
	93111	7421	-4.428	1.759	-0.287	1.0	-4.428	1.759	-0.287	-4.441	-20.8	0.214
26 Slab EL17.5m @ RCCV	96144	8508	0.111	0.762	4.690	1.0	0.111	0.762	4.690	-4.265	-20.8	0.206
	96186	8514	2.343	-6.951	-2.172	1.0	2.343	-6.951	-2.172	-7.434	-20.8	0.358
	96113	6483	-9.995	2.744	-1.583	1.6	-6.247	1.715	-0.989	-6.368	-19.8	0.321
27 Slab EL27.0m @ RCCV	98472	8513	-10.808	-6.087	12.587	1.5	-7.205	-4.058	8.391	-14.169	-24.4	0.582
	98514	8511	4.015	-5.431	-2.348	1.5	2.676	-3.621	-1.566	-3.989	-24.4	0.164
	98424	8512	-29.098	2.108	-5.888	2.4	-12.124	0.878	-2.453	-12.572	-21.4	0.588
28 Pool Girder @ Storage Pool	123054	8512	-1.321	-15.008	2.545	1.6	-0.826	-9.380	1.591	-9.666	-20.5	0.472
	123154	8512	-2.825	-5.733	4.099	1.6	-1.766	-3.583	2.562	-5.393	-20.5	0.263
29 Pool Girder @ Cavity	123062	8513	-3.715	-9.482	-1.757	1.6	-2.322	-5.926	-1.098	-6.235	-20.5	0.304
	123162	8513	-3.415	-7.503	-4.804	1.6	-2.134	-4.689	-3.002	-6.674	-20.5	0.326
30 Pool Girder @ Fuel Pool	123067	8511	-4.292	-11.854	-6.899	1.6	-2.683	-7.409	-4.312	-9.962	-21.2	0.471
	123167	8511	-3.818	-5.177	-6.491	1.6	-2.386	-3.236	-4.057	-6.890	-21.2	0.326
31 MS Tunnel Wall and Slab	150122	7421	0.068	-1.290	1.926	1.3	0.053	-0.992	1.482	-2.041	-20.2	0.101
	96611	8511	-0.742	2.325	-0.083	1.6	-0.464	1.453	-0.052	-0.465	-19.8	0.023
	98614	8512	-1.805	2.572	-0.676	2.4	-0.752	1.072	-0.282	-0.795	-19.6	0.041
32 IC/PCCS Pool Wall in NS Dir.	125051	7521	-0.522	-3.605	-2.459	1.0	-0.522	-3.605	-2.459	-4.966	-18.0	0.275
	125151	7441	-2.048	-2.214	3.305	1.0	-2.048	-2.214	3.305	-5.437	-18.0	0.301
	125055	8513	-5.767	-0.210	-0.799	1.0	-5.767	-0.210	-0.799	-5.879	-18.0	0.326
	125155	8513	-6.767	-0.414	-0.774	1.0	-6.767	-0.414	-0.774	-6.860	-18.0	0.380

Note: Positive value means tension.