


RHS PUMP PIA SEAL AND BRG COOLER 2SWP*AOV20A/22A Ckt-2SWPA32 (GREEN)

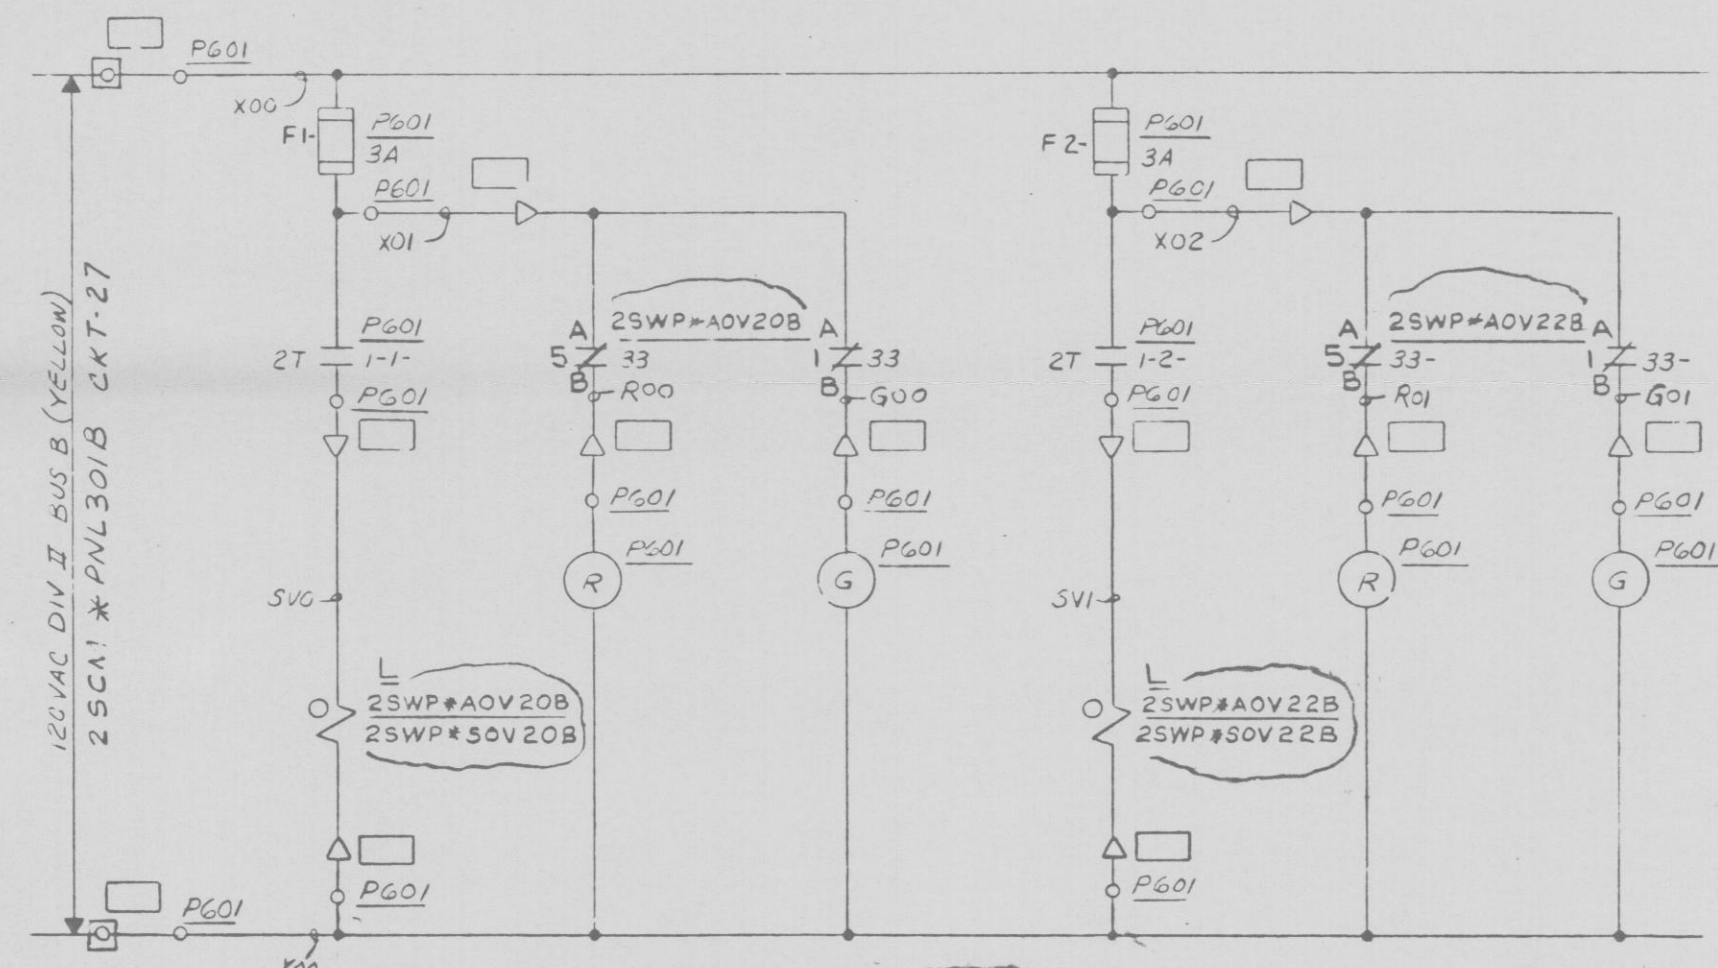

RHS PUMP PIB & PIC SEAL AND BRG COOLER 2SWP*AOV20B/22B Ckt-2SWPB32 (YELLOW)

LIMIT SWITCH DEVELOPMENT							
33		VALVE POSN	FUNCTION				
		FULL OPEN	FULL CLOSE	2SWP* (AOV20A)	2SWP* (AOV22A)	2SWP* (AOV20B)	2SWP* (AOV22B)
1	A-H-B			GRN LT	GRN LT	GRN LT	GRN LT
2	C-H-D			SPARE	SPARE	SPARE	SPARE
3	E-H-F			SPARE	SPARE	SPARE	SPARE
4	G-H-H			SPARE	SPARE	SPARE	SPARE
5	A-H-B			RED LT	RED LT	RED LT	RED LT
6	C-H-D			SPARE	SPARE	SPARE	SPARE
7	E-H-F			SPARE	SPARE	SPARE	SPARE
8	G-H-H			SPARE	SPARE	SPARE	SPARE

PRC
APERTURE
CARD

CS	DETAIL	ESK	SPARES	USED ON
1-1-2SWPA32	"G"	3B	IT	—
1-2-2SWPB32	"G"	3B	IT	—
1-1-2SWPA32	"G"	3B	IT	—
1-2-2SWPB32	"G"	3B	IT	—

- NOTES:
1. ASSOCIATED AOV OPENS WHEN SOV IS DE-ENERGIZED
 2. LOGIC DIAGRAM LSK-9-10M.

NUCLEAR SAFETY RELATED
QA CAT I

AC ELEM DIAG-MISC AC CKTS
SWT SPLY TO RHS PP'S SEAL & BRG CLG
NINE MILE POINT NUCLEAR STATION-UNIT2
NIAGARA MOHAWK POWER CORPORATION

DESIGN CONTROL ISSUE 2		DESIGN CONTROL ISSUE		REV	PGCC	PGCC
6-4-67	ECN-006	3/4/77	3/4/77	1	6-8-77	1-31-77
JST		JST		JST		
6		5		4		
12177-ESK-7SWP03		12177-ESK-7SWP03		12177-ESK-7SWP03		