



Tom Simril
Vice President
Catawba Nuclear Station

Duke Energy
CN01VP | 4800 Concord Road
York, SC 29745

o: 803.701.3340
f: 803.701.3221
tom.simril@duke-energy.com

RA-19-0385

October 31, 2019

ATTN: Document Control Desk
U.S. Nuclear Regulatory Commission
Washington, DC 20555-0001

Subject: Duke Energy Carolinas, LLC (Duke Energy)
Catawba Nuclear Station, Unit 2
Facility Operating License Number NPF-52
Docket Number 50-414
Core Operating Limits Report (COLR) for Unit 2 Cycle 24 Reload Core

Pursuant to Catawba Technical Specification 5.6.5.d, enclosed is the subject COLR. This COLR revision is being submitted to provide the limits of the Catawba Unit 2 Cycle 24 reload core.

This letter, the enclosed COLR, and the attached COLR Appendix A, do not contain any regulatory commitments.

Please direct any questions or concerns to Douglas Brunson, Sr. Engineer, at (803) 701-3865.

Sincerely,

A handwritten signature in black ink that reads "Tom Simril". The signature is fluid and cursive, with the first name "Tom" and last name "Simril" clearly distinguishable.

Tom Simril
Vice President, Catawba Nuclear Station

Enclosure: Catawba Unit 2, Cycle 24, Revision 0, Core Operating Limits Report

Attachment: Catawba Unit 2, Cycle 24, Revision 0, Core Operating Limits Report,
Appendix A, Power Distribution Monitoring Factors

U.S. Nuclear Regulatory Commission
RA-19-0385
October 31, 2019
Page | 2

xc (with enclosure; with attachment):

L. Dudes, Region II Administrator
U.S. Nuclear Regulatory Commission
Marquis One Tower
245 Peachtree Center Avenue NE, Suite 1200
Atlanta, GA 30303-1257

J. D. Austin, Senior Resident Inspector
U.S. Nuclear Regulatory Commission
Catawba Nuclear Station

M. Mahoney, Project Manager
U.S. Nuclear Regulatory Commission
11555 Rockville Pike
Mailstop O-8B1A
Rockville, MD 20852

Enclosure

Catawba Unit 2, Cycle 24, Revision 0, Core Operating Limits Report



Facility Code :	CN	
Applicable Facilities :		
Document Number :	CNEI-0400-355	
Document Revision Number :	000	
Document EC Number :		
Change Reason :	NTM2191074	
Document Title :	Catawba 2 Cycle 24 Core Operating Limits Report	
Stasko, Maryanne E	Preparer	9/5/2019
Klein, Casey	QA	9/5/2019
Murphy, William J	Site Impact Review	9/5/2019
Berklite, Samson V.	Safety Analysis DV	9/5/2019
Robinson, Duncan	Approver	9/5/2019
Notes :		

Catawba 2 Cycle 24
Core Operating Limits Report
Revision 0

September 2019

Reference: CNC-1553.05-00-0689, Rev. 0
Reload 50.59 #: 02286541



QA CONDITION 1

The information presented in this report has been prepared and issued in accordance with Catawba Technical Specification 5.6.5.

Catawba 2 Cycle 24 Core Operating Limits Report

Implementation Instructions for Revision 0

Revision Description and CR Tracking

Revision 0 of the Catawba Unit 2 Cycle 24 COLR contains limits specific to the reload core.

There is no CR associated with this revision.

Implementation Schedule

The Catawba Unit 2 Cycle 24 COLR requires the reload 50.59 (AR #02286541) be approved prior to implementation and fuel loading.

Revision 0 may become effective any time during NO MODE between cycles 23 and 24 but must become effective prior to entering MODE 6 which starts cycle 24. The Catawba Unit 2 Cycle 24 COLR will cease to be effective during NO MODE between cycle 24 and 25.

Data files to be Implemented

No data files are transmitted as part of this document.

Additional Information

CDR was performed by Safety Analysis for COLR Sections 1.1, 2.1, and 2.9 – 2.18.

CNS Reactor Engineering performed site inspection in accordance with AD-NF-ALL-0807 and AD-NF-NGO-0214.

Catawba 2 Cycle 24 Core Operating Limits Report

REVISION LOG

<u>Revision</u>	<u>Effective Date</u>	<u>Pages Affected</u>	<u>COLR</u>
0	September 2019	1-31, Appendix A*	C2C24 COLR, Rev. 0

- * Appendix A contains power distribution monitoring factors used in Technical Specification Surveillance and is not uploaded as part of the EI body. However, Appendix A is uploaded into the document management system, for ease of transmittal to the NRC.

Catawba 2 Cycle 24 Core Operating Limits Report

1.0 Core Operating Limits Report

This Core Operating Limits Report (COLR) has been prepared in accordance with requirements of Technical Specification 5.6.5. Technical Specifications that reference this report are listed below along with the NRC approved analytical methods used to develop and/or determine COLR parameters identified in Technical Specifications.

TS Section	Technical Specifications	COLR Parameter	COLR Section	NRC Approved Methodology (Section 1.1 Number)
2.1.1	Reactor Core Safety Limits	RCS Temperature and Pressure Safety Limits	2.1	6, 7, 8, 9, 10, 12, 15, 16, 19, 20
3.1.1	Shutdown Margin	Shutdown Margin	2.2	6, 7, 8, 12, 14, 15, 16, 19, 20
3.1.3	Moderator Temperature Coefficient	MTC	2.3	6, 7, 8, 14, 16, 18
3.1.4	Rod Group Alignment Limits	Shutdown Margin	2.2	6, 7, 8, 12, 14, 15, 16, 19, 20
3.1.5	Shutdown Bank Insertion Limit	Shutdown Margin	2.2	2, 4, 6, 7, 8, 9, 10
		Rod Insertion Limits	2.4	12, 14, 15, 16, 19, 20
3.1.6	Control Bank Insertion Limit	Shutdown Margin	2.2	2, 4, 6, 7, 8, 9, 10
		Rod Insertion Limits	2.5	12, 14, 15, 16, 19, 20
3.1.8	Physics Tests Exceptions	Shutdown Margin	2.2	6, 7, 8, 12, 14, 15, 16, 19, 20
3.2.1	Heat Flux Hot Channel Factor	F _Q	2.6	2, 4, 6, 7, 8, 9, 10,
		AFD	2.8	12, 15, 16, 19, 20
		OTΔT	2.9	
		Penalty Factors	2.6	
3.2.2	Nuclear Enthalpy Rise Hot Channel Factor	FAH	2.7	2, 4, 6, 7, 8, 9, 10
		Penalty Factors	2.7	12, 15, 16, 19, 20
3.2.3	Axial Flux Difference	AFD	2.8	2, 4, 6, 7, 8, 15, 16
3.3.1	Reactor Trip System Instrumentation	OTΔT	2.9	6, 7, 8, 9, 10, 12
		OPΔT	2.9	15, 16, 19, 20
3.3.9	Boron Dilution Mitigation System	Reactor Makeup Water Flow Rate	2.10	6, 7, 8, 14, 16
3.4.1	RCS Pressure, Temperature and Flow limits for DNB	RCS Pressure, Temperature and Flow	2.11	6, 7, 8, 9, 10, 12, 19, 20
3.5.1	Accumulators	Max and Min Boron Conc.	2.12	6, 7, 8, 14, 16
3.5.4	Refueling Water Storage Tank	Max and Min Boron Conc.	2.13	6, 7, 8, 14, 16
3.7.15	Spent Fuel Pool Boron Concentration	Min Boron Concentration	2.14	6, 7, 8, 14, 16
3.9.1	Refueling Operations - Boron Concentration	Min Boron Concentration	2.15	6, 7, 8, 14, 16
5.6.5	Core Operating Limits Report (COLR)	Analytical Methods	1.1	None

The Selected Licensee Commitments that reference this report are listed below

SLC Section	Selected Licensing Commitment	COLR Parameter	COLR Section	NRC Approved Methodology (Section 1.1 Number)
16.7-9	Standby Shutdown System	Standby Makeup Pump Water Supply	2.16	6, 7, 8, 14, 16
16.9-11	Boration Systems – Borated Water Source – Shutdown	Borated Water Volume and Conc. for BAT/RWST	2.17	6, 7, 8, 14, 16
16.9-12	Boration Systems – Borated Water Source – Operating	Borated Water Volume and Conc. for BAT/RWST	2.18	6, 7, 8, 14, 16

Catawba 2 Cycle 24 Core Operating Limits Report

1.1 Analytical Methods

Analytical methods used to determine core operating limits for parameters identified in Technical Specifications and previously reviewed and approved by the NRC as specified in Technical Specification 5.6.5 are as follows.

1. WCAP-9272-P-A, "Westinghouse Reload Safety Evaluation Methodology," (W Proprietary).

Revision 0

Report Date: July 1985

Not Used

2. WCAP-10054-P-A, "Westinghouse Small Break ECCS Evaluation Model using the NOTRUMP Code, " (W Proprietary).

Revision 0

Report Date: August 1985

Addendum 2, "Addendum to the Westinghouse Small Break ECCS Evaluation Model Using the NOTRUMP Code: Safety Injection into the Broken Loop and COSI Condensation Model," (W Proprietary). (Referenced in Duke Letter DPC-06-101)

Revision 1

Report Date: July 1997

3. WCAP-10266-P-A, "The 1981 Version Of Westinghouse Evaluation Model Using BASH Code", (W Proprietary).

Revision 2

Report Date: March 1987

Not Used

4. WCAP-12945-P-A, Volume 1 and Volumes 2-5, "Code Qualification Document for Best-Estimate LOCA," (W Proprietary).

Revision: Volume 1 (Revision 2) and Volumes 2-5 (Revision 1)

Report Date: March 1998

5. BAW-10168P-A, "B&W Loss-of-Coolant Accident Evaluation Model for Recirculating Steam Generator Plants," (B&W Proprietary).

Revision 1

SER Date: January 22, 1991

Revision 2

SER Dates: August 22, 1996 and November 26, 1996.

Revision 3

SER Date: June 15, 1994.

Not Used

Catawba 2 Cycle 24 Core Operating Limits Report

1.1 Analytical Methods (continued)

6. DPC-NE-3000-PA, "Thermal-Hydraulic Transient Analysis Methodology," (Duke Energy Proprietary).
Revision 5a
Report Date: October 2012
7. DPC-NE-3001-PA, "Multidimensional Reactor Transients and Safety Analysis Physics Parameter Methodology," (Duke Energy Proprietary).
Revision 1
Report Date: March 2015
8. DPC-NE-3002-A, "UFSAR Chapter 15 System Transient Analysis Methodology".
Revision 4c
Report Date: January 2019
9. DPC-NE-2004P-A, "Duke Power Company McGuire and Catawba Nuclear Stations Core Thermal-Hydraulic Methodology using VIPRE-01," (Duke Energy Proprietary).
Revision 2a
Report Date: December 2008
10. DPC-NE-2005P-A, "Thermal Hydraulic Statistical Core Design Methodology," (Duke Energy Proprietary).
Revision 5
Report Date: March 2016
11. DPC-NE-2008-PA, "Fuel Mechanical Reload Analysis Methodology Using TACO3," (Duke Energy Proprietary).
Revision 0
Report Date: April 1995
Not Used
12. DPC-NE-2009-P-A, "Westinghouse Fuel Transition Report," (Duke Energy Proprietary).
Revision 3c
Report Date: March 2017
13. DPC-NE-1004-A, "Nuclear Design Methodology Using CASMO-3/SIMULATE-3P."
Revision 1a
Report Date: January 2009
Not Used

Catawba 2 Cycle 24 Core Operating Limits Report

1.1 Analytical Methods (continued)

14. DPC-NF-2010-A, "Duke Power Company McGuire Nuclear Station Catawba Nuclear Station Nuclear Physics Methodology for Reload Design."

Revision 2a

Report Date: December 2009

15. DPC-NE-2011-PA, "Nuclear Design Methodology for Core Operating Limits of Westinghouse Reactors," (Duke Energy Proprietary).

Revision 1a

Report Date: June 2009

16. DPC-NE-1005-PA, "Nuclear Design Methodology Using CASMO-4 / SIMULATE-3 MOX", (Duke Energy Proprietary).

Revision 1

Report Date: November 2008

17. BAW-10231P-A, "COPERNIC Fuel Rod Design Computer Code" (Framatome ANP Proprietary)

Revision 1

SER Date: January 14, 2004

Not Used

18. DPC-NE-1007-PA, "McGuire Nuclear Station Catawba Nuclear Station Conditional Exemption of the EOC MTC Measurement Methodology", (Duke Energy and W Proprietary)

Revision 0

Report Date: April 2015

19. WCAP-12610-P-A, "VANTAGE+ Fuel Assembly Reference Core Report," (W Proprietary).

Revision 0

Report Date: April 1995

20. WCAP-12610-P-A & CENPD-404-P-A, Addendum 1-A, "Optimized ZIRLO™," (W Proprietary).

Revision 0

Report Date: July 2006

Catawba 2 Cycle 24 Core Operating Limits Report

2.0 Operating Limits

Cycle-specific parameter limits for specifications listed in Section 1.0 are presented in the following subsections. These limits have been developed using NRC approved methodologies specified in Section 1.1.

2.1 Reactor Core Safety Limits (TS 2.1.1)

Reactor Core Safety Limits are shown in Figure 1.

2.2 Shutdown Margin - SDM (TS 3.1.1, TS 3.1.4, TS 3.1.5, TS 3.1.6, TS 3.1.8)

2.2.1 For TS 3.1.1, SDM shall be greater than or equal to 1.3% $\Delta K/K$ in MODE 2 with $K_{eff} < 1.0$ and in MODES 3 and 4.

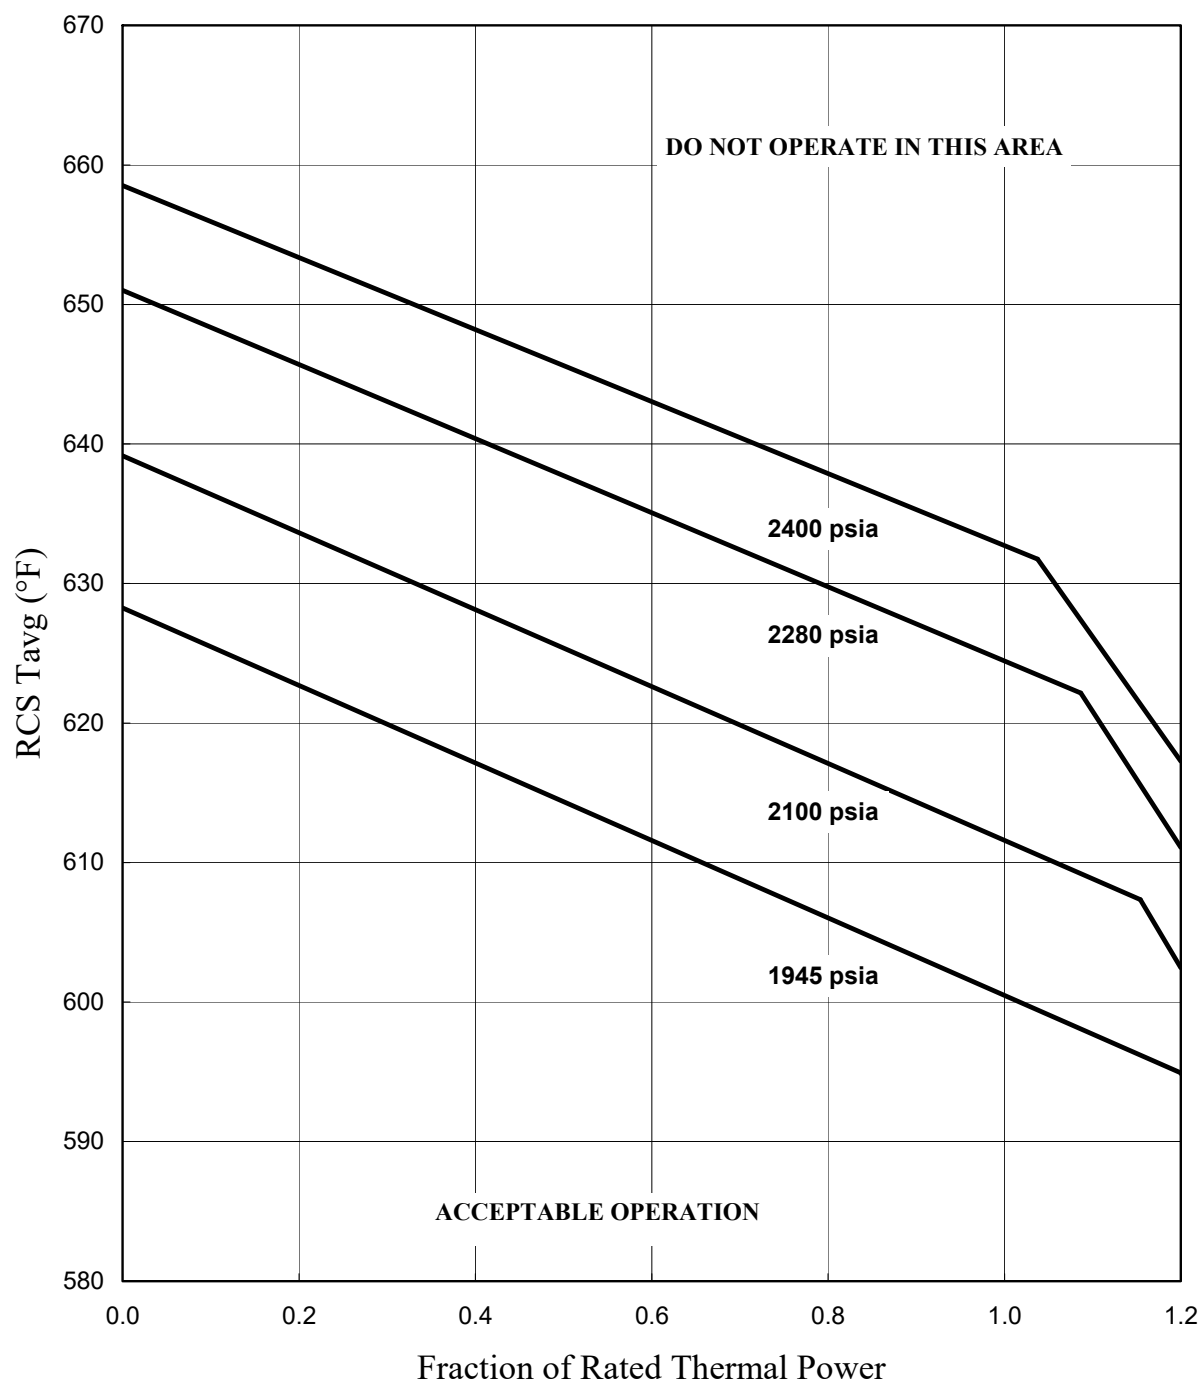
2.2.2 For TS 3.1.1, SDM shall be greater than or equal to 1.0% $\Delta K/K$ in MODE 5.

2.2.3 For TS 3.1.4, SDM shall be greater than or equal to 1.3% $\Delta K/K$ in MODE 1 and MODE 2.

2.2.4 For TS 3.1.5, SDM shall be greater than or equal to 1.3% $\Delta K/K$ in MODE 1 and MODE 2 with any control bank not fully inserted.

2.2.5 For TS 3.1.6, SDM shall be greater than or equal to 1.3% $\Delta K/K$ in MODE 1 and MODE 2 with $K_{eff} \geq 1.0$.

2.2.6 For TS 3.1.8, SDM shall be greater than or equal to 1.3% $\Delta K/K$ in MODE 2 during PHYSICS TESTS.

Catawba 2 Cycle 24 Core Operating Limits Report**Figure 1****Reactor Core Safety Limits
Four Loops in Operation**

Catawba 2 Cycle 24 Core Operating Limits Report

2.3 Moderator Temperature Coefficient - MTC (TS 3.1.3)

2.3.1 Moderator Temperature Coefficient (MTC) Limits are:

MTC shall be less positive than the upper limits shown in Figure 2.

BOC, ARO, HZP MTC shall be less positive than $0.7\text{E-}04 \Delta\text{K/K/}^{\circ}\text{F}$.

EOC, ARO, RTP MTC shall be less negative than the $-4.3\text{E-}04 \Delta\text{K/K/}^{\circ}\text{F}$ lower MTC limit.

2.3.2 300 ppm MTC Surveillance Limit is:

Measured 300 ppm ARO, equilibrium RTP MTC shall be less negative than or equal to $-3.65\text{E-}04 \Delta\text{K/K/}^{\circ}\text{F}$.

2.3.3 The Revised Predicted near-EOC 300 ppm ARO RTP MTC shall be calculated using the procedure contained in DPC-NE-1007-PA.

If the Revised Predicted MTC is less negative than or equal to the 300 ppm SR 3.1.3.2 Surveillance Limit, and all benchmark data contained in the surveillance procedure is satisfied, then an MTC measurement in accordance with SR 3.1.3.2 is not required to be performed.

2.3.4 60 ppm MTC Surveillance Limit is:

Measured 60 ppm ARO, equilibrium RTP MTC shall be less negative than or equal to $-4.125\text{E-}04 \Delta\text{K/K/}^{\circ}\text{F}$.

Where:

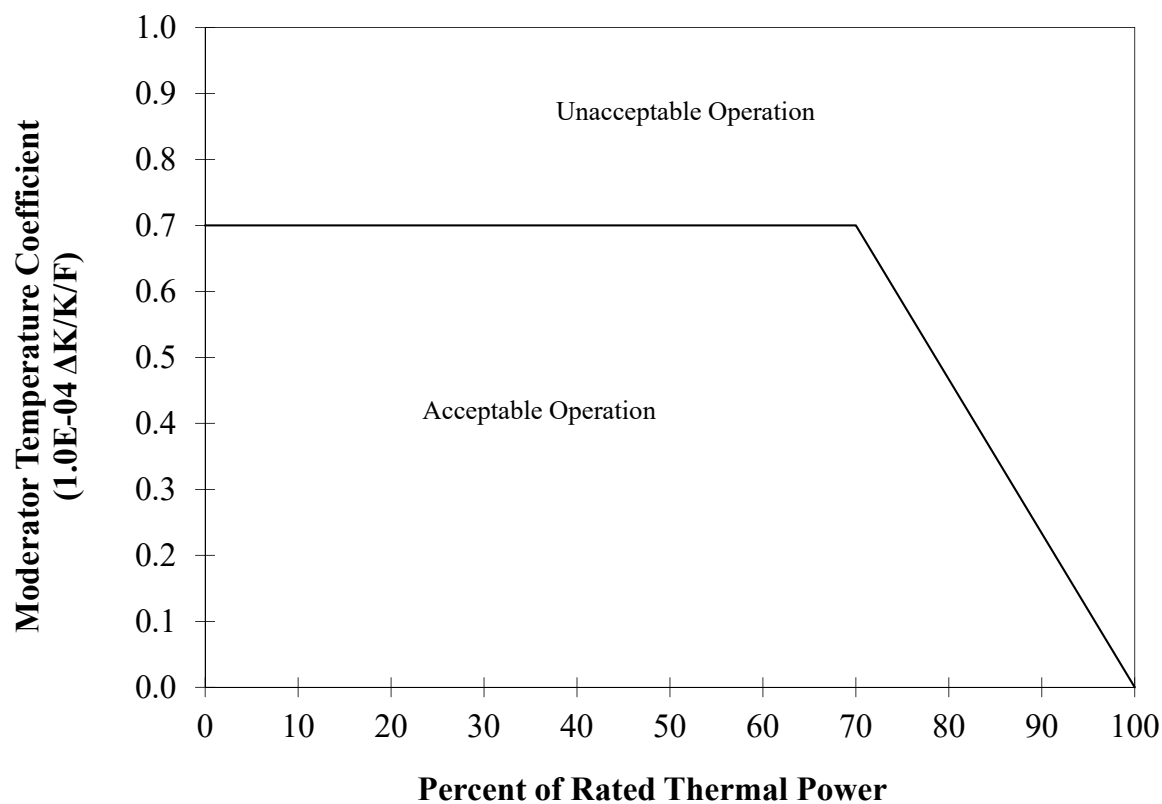
BOC =	Beginning of Cycle (burnup corresponding to most positive MTC)
EOC =	End of Cycle
ARO =	All Rods Out
HZP =	Hot Zero Thermal Power
RTP =	Rated Thermal Power
ppm =	Parts per million (Boron)

2.4 Shutdown Bank Insertion Limit (TS 3.1.5)

2.4.1 Each shutdown bank shall be withdrawn to at least 222 steps. Shutdown banks are withdrawn in sequence and with no overlap.

2.5 Control Bank Insertion Limits (TS 3.1.6)

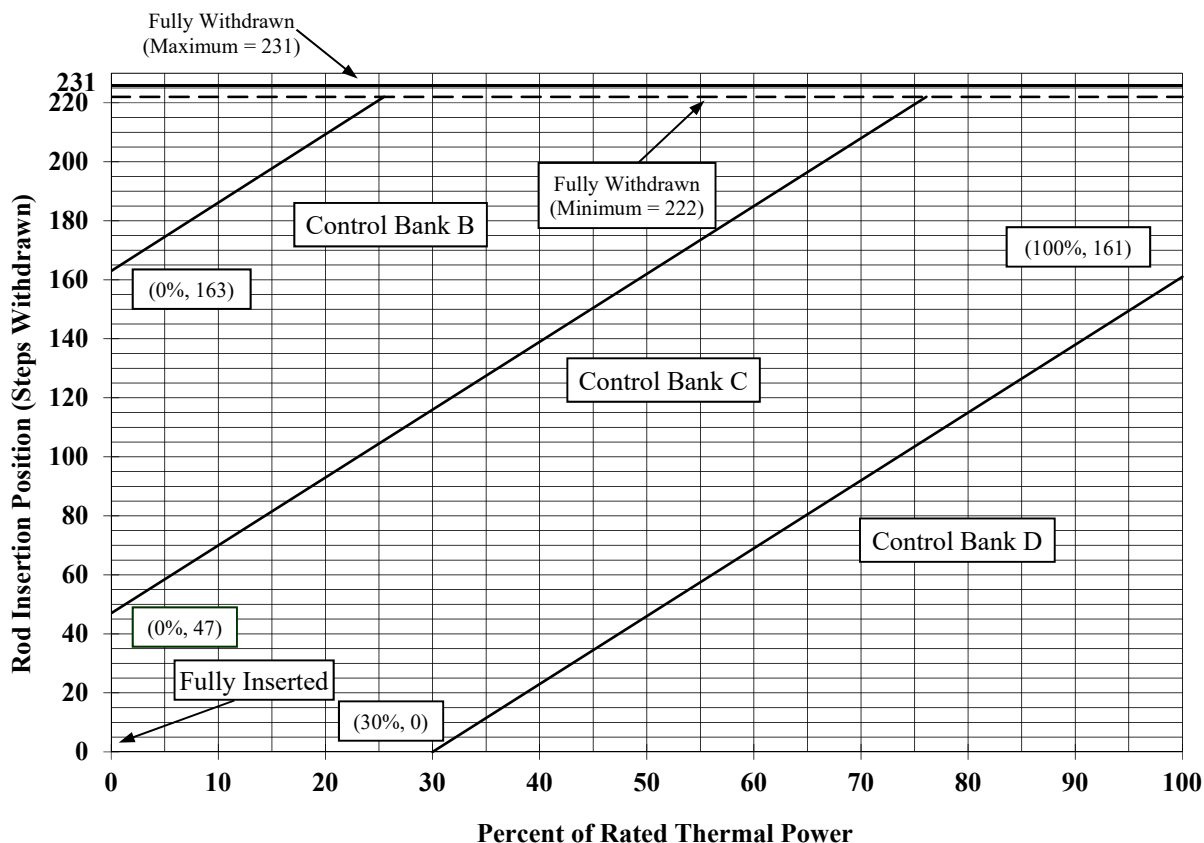
2.5.1 Control banks shall be within the insertion, sequence, and overlap limits shown in Figure 3. Specific control bank withdrawal and overlap limits as a function of the fully withdrawn position are shown in Table 1.

Catawba 2 Cycle 24 Core Operating Limits Report**Figure 2****Moderator Temperature Coefficient Upper Limit Versus Power Level**

NOTE: Compliance with Technical Specification 3.1.3 may require rod withdrawal limits. Refer to the Unit 2 ROD manual for details.

Catawba 2 Cycle 24 Core Operating Limits Report

Figure 3
Control Bank Insertion Limits Versus Percent Rated Thermal Power



The Rod Insertion Limits (RIL) for Control Bank D (CD), Control Bank C (CC), and Control Bank B (CB) can be calculated by:

$$\text{Bank CD RIL} = 2.3(P) - 69 \quad \{30 \leq P \leq 100\}$$

$$\text{Bank CC RIL} = 2.3(P) + 47 \quad \{0 \leq P \leq 76.1\} \text{ for CC RIL} = 222 \{76.1 < P \leq 100\}$$

$$\text{Bank CB RIL} = 2.3(P) + 163 \quad \{0 \leq P \leq 25.7\} \text{ for CB RIL} = 222 \{25.7 < P \leq 100\}$$

where P = % of Rated Thermal Power

NOTE: Compliance with Technical Specification 3.1.3 may require rod withdrawal limits. Refer to the Unit 2 ROD manual for details.

Catawba 2 Cycle 24 Core Operating Limits Report

Table 1
Control Bank Withdrawal Steps and Sequence

Fully Withdrawn at 222 Steps				Fully Withdrawn at 223 Steps			
Control Bank A	Control Bank B	Control Bank C	Control Bank D	Control Bank A	Control Bank B	Control Bank C	Control Bank D
0 Start	0	0	0	0 Start	0	0	0
116	0 Start	0	0	116	0 Start	0	0
222 Stop	106	0	0	223 Stop	107	0	0
222	116	0 Start	0	223	116	0 Start	0
222	222 Stop	106	0	223	223 Stop	107	0
222	222	116	0 Start	223	223	116	0 Start
222	222	222 Stop	106	223	223	223 Stop	107
Fully Withdrawn at 224 Steps				Fully Withdrawn at 225 Steps			
Control Bank A	Control Bank B	Control Bank C	Control Bank D	Control Bank A	Control Bank B	Control Bank C	Control Bank D
0 Start	0	0	0	0 Start	0	0	0
116	0 Start	0	0	116	0 Start	0	0
224 Stop	108	0	0	225 Stop	109	0	0
224	116	0 Start	0	225	116	0 Start	0
224	224 Stop	108	0	225	225 Stop	109	0
224	224	116	0 Start	225	225	116	0 Start
224	224	224 Stop	108	225	225	225 Stop	109
Fully Withdrawn at 226 Steps				Fully Withdrawn at 227 Steps			
Control Bank A	Control Bank B	Control Bank C	Control Bank D	Control Bank A	Control Bank B	Control Bank C	Control Bank D
0 Start	0	0	0	0 Start	0	0	0
116	0 Start	0	0	116	0 Start	0	0
226 Stop	110	0	0	227 Stop	111	0	0
226	116	0 Start	0	227	116	0 Start	0
226	226 Stop	110	0	227	227 Stop	111	0
226	226	116	0 Start	227	227	116	0 Start
226	226	226 Stop	110	227	227	227 Stop	111
Fully Withdrawn at 228 Steps				Fully Withdrawn at 229 Steps			
Control Bank A	Control Bank B	Control Bank C	Control Bank D	Control Bank A	Control Bank B	Control Bank C	Control Bank D
0 Start	0	0	0	0 Start	0	0	0
116	0 Start	0	0	116	0 Start	0	0
228 Stop	112	0	0	229 Stop	113	0	0
228	116	0 Start	0	229	116	0 Start	0
228	228 Stop	112	0	229	229 Stop	113	0
228	228	116	0 Start	229	229	116	0 Start
228	228	228 Stop	112	229	229	229 Stop	113
Fully Withdrawn at 230 Steps				Fully Withdrawn at 231 Steps			
Control Bank A	Control Bank B	Control Bank C	Control Bank D	Control Bank A	Control Bank B	Control Bank C	Control Bank D
0 Start	0	0	0	0 Start	0	0	0
116	0 Start	0	0	116	0 Start	0	0
230 Stop	114	0	0	231 Stop	115	0	0
230	116	0 Start	0	231	116	0 Start	0
230	230 Stop	114	0	231	231 Stop	115	0
230	230	116	0 Start	231	231	116	0 Start
230	230	230 Stop	114	231	231	231 Stop	115

Catawba 2 Cycle 24 Core Operating Limits Report

2.6 Heat Flux Hot Channel Factor - $F_Q(X,Y,Z)$ (TS 3.2.1)

2.6.1 $F_Q(X,Y,Z)$ steady-state limits are defined by the following relationships:

$$\begin{aligned} F_Q^{RTP} * K(Z)/P & \quad \text{for } P > 0.5 \\ F_Q^{RTP} * K(Z)/0.5 & \quad \text{for } P \leq 0.5 \end{aligned}$$

where,

$$P = \frac{\text{Thermal Power}}{\text{Rated Thermal Power}}$$

Note: Measured $F_Q(X,Y,Z)$ shall be increased by 3% to account for manufacturing tolerances and 5% to account for measurement uncertainty when comparing against the LCO limits. The manufacturing tolerance and measurement uncertainty are implicitly included in the F_Q surveillance limits as defined in COLR Sections 2.6.5 and 2.6.6.

2.6.2 $F_Q^{RTP} = 2.70 \times K(\text{BU})$

2.6.3 $K(Z)$ is the normalized $F_Q(X,Y,Z)$ as a function of core height. $K(Z)$ for Westinghouse RFA fuel is provided in Figure 4.

2.6.4 $K(\text{BU})$ is the normalized $F_Q(X,Y,Z)$ as a function of burnup. F_Q^{RTP} with the $K(\text{BU})$ penalty for Westinghouse RFA fuel is analytically confirmed in cycle-specific reload calculation. $K(\text{BU})$ is set to 1.0 at all burnups.

The following parameters are required for core monitoring per the Surveillance Requirements of Technical Specification 3.2.1:

2.6.5 $[F_Q^L(X,Y,Z)]^{OP} = \frac{F_Q^D(X,Y,Z) * M_Q(X,Y,Z)}{UMT * MT * TILT}$

where:

$[F_Q^L(X,Y,Z)]^{OP}$ = Cycle dependent maximum allowable design peaking factor that ensures $F_Q(X,Y,Z)$ LOCA limit is not exceeded for operation within AFD, RIL, and QPTR limits.
 $F_Q^L(X,Y,Z)^{OP}$ includes allowances for calculation and measurement uncertainties.

$F_Q^D(X,Y,Z)$ = Design power distribution for F_Q . $F_Q^D(X,Y,Z)$ is provided in Appendix Table A-1 for normal operating conditions and in Appendix Table A-4 for power escalation testing during initial startup operation.

Catawba 2 Cycle 24 Core Operating Limits Report

$M_Q(X,Y,Z)$ = Margin remaining in core location X,Y,Z to the LOCA limit in the transient power distribution. $M_Q(X,Y,Z)$ is provided in Appendix Table A-1 for normal operating conditions and in Appendix Table A-4 for power escalation testing during initial startup operation.

UMT = Total Peak Measurement Uncertainty. (UMT = 1.05)

MT = Engineering Hot Channel Factor. (MT = 1.03).

TILT = Peaking penalty to account for allowable quadrant power tilt ratio of 1.02. (TILT = 1.035)

$$2.6.6 \quad [F_Q^L(X,Y,Z)]^{RPS} = \frac{F_Q^D(X,Y,Z) * M_C(X,Y,Z)}{UMT * MT * TILT}$$

where:

$[F_Q^L(X,Y,Z)]^{RPS}$ = Cycle dependent maximum allowable design peaking factor that ensures $F_Q(X,Y,Z)$ Centerline Fuel Melt (CFM) limit is not exceeded for operation within AFD, RIL, and QPTR limits. $[F_Q^L(X,Y,Z)]^{RPS}$ includes allowances for calculation and measurement uncertainties.

$F_Q^D(X,Y,Z)$ = Defined in Section 2.6.5.

$M_C(X,Y,Z)$ = Margin remaining to the CFM limit in core location X,Y,Z from the transient power distribution. $M_C(X,Y,Z)$ is provided in Appendix Table A-2 for normal operating conditions and in Appendix Table A-5 for power escalation testing during initial startup operations.

UMT = Defined in Section 2.6.5.

MT = Defined in Section 2.6.5.

TILT = Defined in Section 2.6.5.

Catawba 2 Cycle 24 Core Operating Limits Report**2.6.7** $KSLOPE = 0.0725$

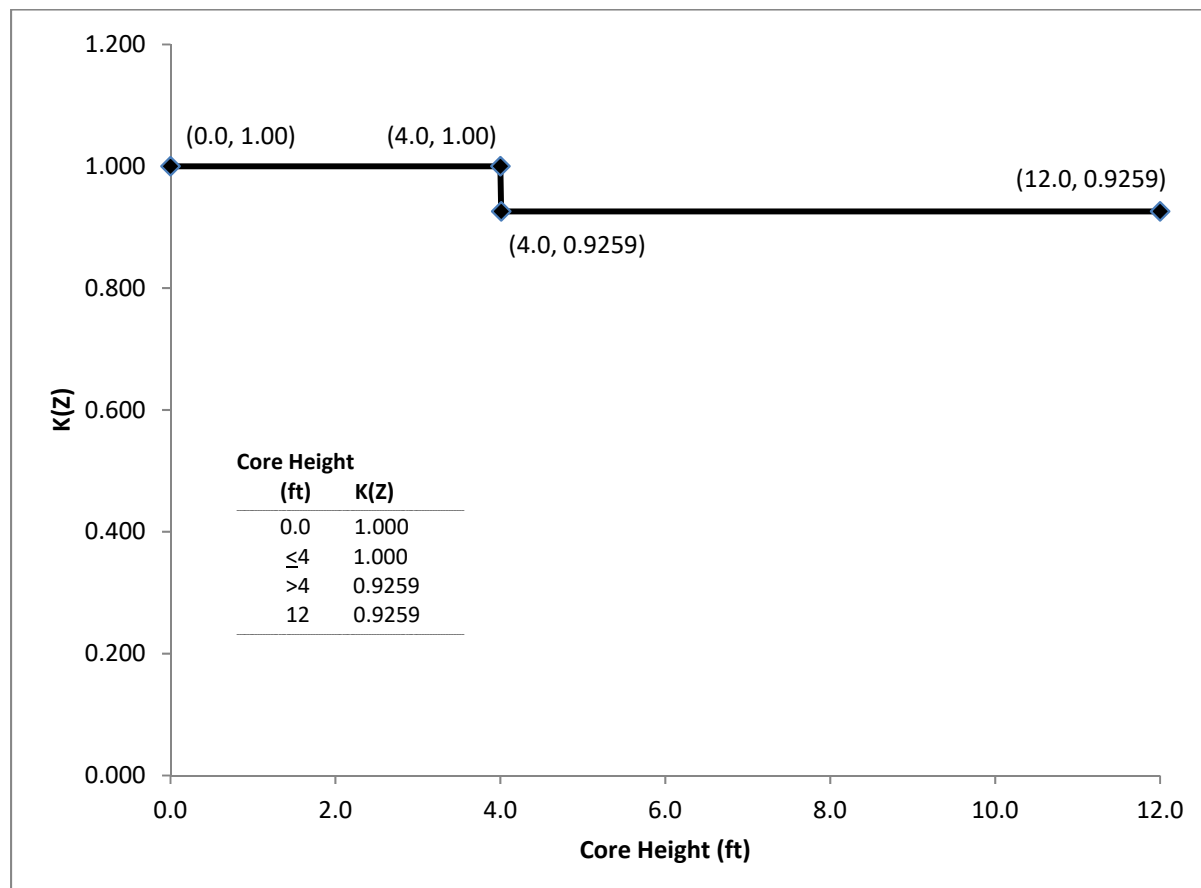
where:

$KSLOPE$ = adjustment to K_1 value from $OT\Delta T$ trip setpoint required to compensate for each 1% measured $F_Q^M(X,Y,Z)$ exceeds $[F_Q^L(X,Y,Z)]^{RPS}$.

2.6.8 $F_Q(X,Y,Z)$ Penalty Factors for Technical Specification Surveillances 3.2.1.2 and 3.2.1.3 are provided in Table 2.

Catawba 2 Cycle 24 Core Operating Limits Report**Figure 4**

**$K(Z)$, Normalized $F_Q(X,Y,Z)$ as a Function of Core Height
for RFA Fuel**



Catawba 2 Cycle 24 Core Operating Limits Report**Table 2**

**$F_Q(X,Y,Z)$ and $F_{\Delta H}(X,Y)$ Penalty Factors
For Tech Spec Surveillances 3.2.1.2, 3.2.1.3 and 3.2.2.2**

Burnup (EFPD)	$F_Q(X,Y,Z)$ Penalty Factor(%)	$F_{\Delta H}(X,Y)$ Penalty Factor (%)
4	2.00	2.00
12	2.00	2.00
25	2.00	2.00
50	2.00	2.00
75	2.00	2.00
100	2.00	2.00
125	2.00	2.00
150	2.00	2.00
175	2.00	2.00
200	2.00	2.00
225	2.00	2.00
250	2.00	2.00
275	2.00	2.00
300	2.00	2.00
325	2.00	2.00
350	2.00	2.00
375	2.00	2.00
400	2.00	2.00
425	2.00	2.00
450	2.00	2.00
475	2.00	2.00
500	2.00	2.00
510	2.00	2.00
520	2.00	2.00
530	2.00	2.00
540	2.00	2.00

Note: Linear interpolation is adequate for intermediate cycle burnups. All cycle burnups outside the range of the table shall use a 2% penalty factor for both $F_Q(X,Y,Z)$ and $F_{\Delta H}(X,Y)$ for compliance with Tech Spec Surveillances 3.2.1.2, 3.2.1.3 and 3.2.2.2.

Catawba 2 Cycle 24 Core Operating Limits Report

2.7 Nuclear Enthalpy Rise Hot Channel Factor - $F_{\Delta H}(X,Y)$ (TS 3.2.2)

$F_{\Delta H}$ steady-state limits referred to in Technical Specification 3.2.2 are defined by the following relationship.

$$2.7.1 \quad [F_{\Delta H}^L(X,Y)]^{LCO} = \text{MARP}(X,Y) * \left[1.0 + \frac{1}{\text{RRH}} * (1.0 - P) \right]$$

where:

$[F_{\Delta H}^L(X,Y)]^{LCO}$ is the steady-state, maximum allowed radial peak and includes allowances for calculation/measurement uncertainty.

$\text{MARP}(X,Y) =$ Cycle-specific operating limit Maximum Allowable Radial Peaks. $\text{MARP}(X,Y)$ radial peaking limits are provided in Table 3.

$$P = \frac{\text{Thermal Power}}{\text{Rated Thermal Power}}$$

$\text{RRH} =$ Thermal Power reduction required to compensate for each 1% measured radial peak, $F_{\Delta H}^M(X,Y)$, exceeds the limit.

$$(\text{RRH} = 3.34, 0.0 < P \leq 1.0)$$

The following parameters are required for core monitoring per surveillance requirements of Technical Specification 3.2.2.

$$2.7.2 \quad [F_{\Delta H}^L(X,Y)]^{SURV} = \frac{F_{\Delta H}^D(X,Y) * M_{\Delta H}(X,Y)}{\text{UMR} * \text{TILT}}$$

where:

$[F_{\Delta H}^L(X,Y)]^{SURV} =$ Cycle dependent maximum allowable design peaking factor that ensures $F_{\Delta H}(X,Y)$ limit is not exceeded for operation within AFD, RIL, and QPTR limits. $F_{\Delta H}^L(X,Y)^{SURV}$ includes allowances for calculation and measurement uncertainty.

$F_{\Delta H}^D(X,Y) =$ Design power distribution for $F_{\Delta H}$. $F_{\Delta H}^D(X,Y)$ is provided in Appendix Table A-3 for normal operation and in Appendix Table A-6 for power escalation testing during initial startup operation.

Catawba 2 Cycle 24 Core Operating Limits Report

$M_{\Delta H}(X,Y)$ = Margin remaining in core location X,Y relative to the Operational DNB limits in the transient power distribution. $M_{\Delta H}(X,Y)$ is provided in Appendix Table A-3 for normal operation and in Appendix Table A-6 for power escalation testing during initial startup operation.

UMR = Uncertainty value for measured radial peaks (UMR = 1.0). UMR is 1.0 since a factor of 1.04 is implicitly included in the variable $M_{\Delta H}(X,Y)$.

TILT = Defined in Section 2.6.5.

2.7.3 RRH is defined in Section 2.7.1.

2.7.4 TRH = 0.04

where:

TRH = Reduction in OTΔT K_1 setpoint required to compensate for each 1% measured radial peak, $F_{\Delta H}^M(X,Y)$ exceeds its limit.

2.7.5 $F_{\Delta H}(X,Y)$ Penalty Factors for Technical Specification Surveillance 3.2.2.2 are provided in Table 2.

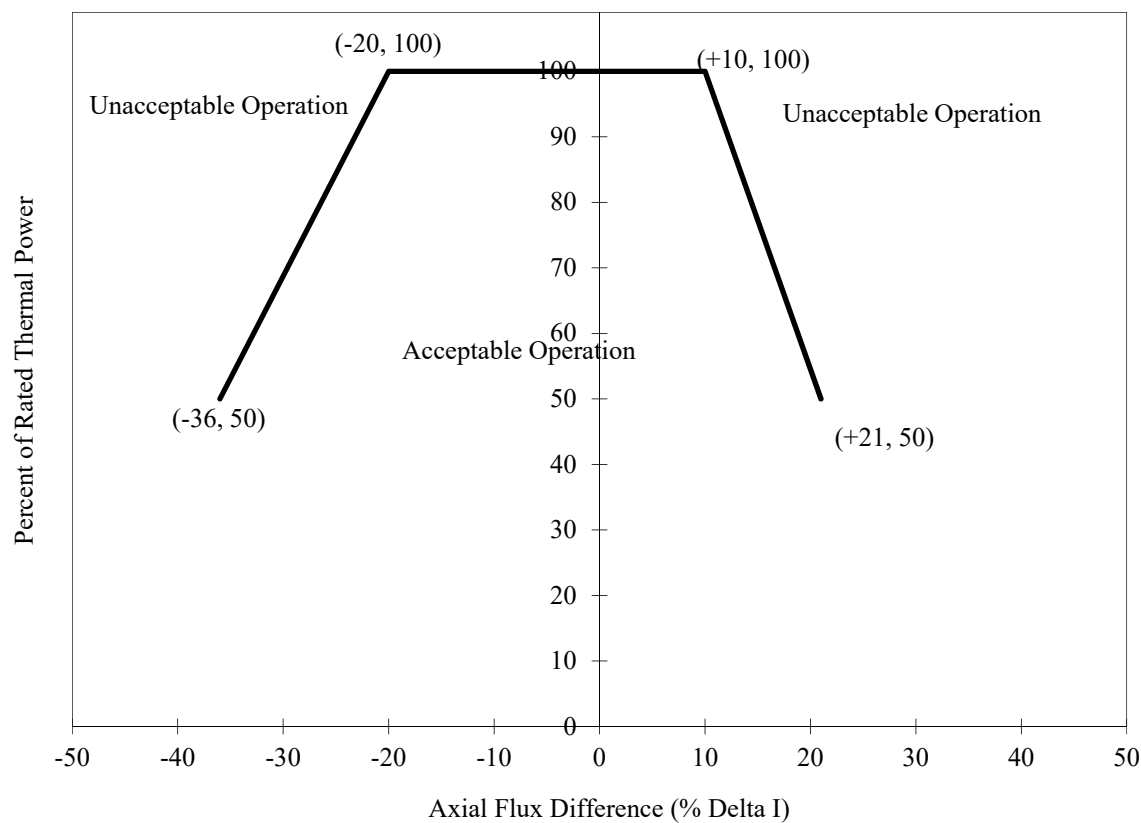
2.8 Axial Flux Difference – AFD (TS 3.2.3)

2.8.1 Axial Flux Difference (AFD) Limits are provided in Figure 5.

Catawba 2 Cycle 24 Core Operating Limits Report

Table 3
Maximum Allowable Radial Peaks (MARPs)
RFA Steady State Limiting Value Between
Loss of Flow Accident (LOFA) MARPs and $F\Delta H_{LOCA}$

Core Height (ft)	Axial Peak												
	1.05	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.1	3	3.25
0.12	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.3151	1.2461
1.20	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.3007	1.2235
2.40	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.4633	1.4616
3.60	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.4675	1.3874
4.80	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.2987	1.2579
6.00	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.3293	1.2602
7.20	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.5982	1.2871	1.2195
8.40	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6010	1.5127	1.2182	1.1578
9.60	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.5808	1.5301	1.4444	1.1431	1.0914
10.80	1.6058	1.6058	1.6058	1.6058	1.6058	1.6058	1.5743	1.5573	1.5088	1.4624	1.3832	1.1009	1.0470
11.40	1.6058	1.6058	1.6058	1.6058	1.6057	1.5826	1.5289	1.5098	1.4637	1.4218	1.3458	1.0670	1.0142

Catawba 2 Cycle 24 Core Operating Limits Report**Figure 5****Percent of Rated Thermal Power Versus Percent Axial Flux Difference Limits**

NOTE: Compliance with Technical Specification 3.2.1 may require more restrictive AFD limits. Refer to the Unit 2 ROD manual for operational AFD limits.

Catawba 2 Cycle 24 Core Operating Limits Report

2.9 Reactor Trip System Instrumentation Setpoints (TS 3.3.1) Table 3.3.1-1

2.9.1 Overtemperature ΔT Setpoint Parameter Values

<u>Parameter</u>	<u>Nominal Value</u>
Nominal T_{avg} at RTP	$T' \leq 590.8 \text{ }^{\circ}\text{F}$
Nominal RCS Operating Pressure	$P' = 2235 \text{ psig}$
Overtemperature ΔT reactor trip setpoint	$K_1 = 1.1953$
Overtemperature ΔT reactor trip heatup setpoint penalty coefficient	$K_2 = 0.03163/^{\circ}\text{F}$
Overtemperature ΔT reactor trip depressurization setpoint penalty coefficient	$K_3 = 0.001414/\text{psi}$
Time constants utilized in the lead-lag compensator for ΔT	$\tau_1 = 8 \text{ sec.}$ $\tau_2 = 3 \text{ sec.}$
Time constant utilized in the lag compensator for ΔT	$\tau_3 = 0 \text{ sec.}$
Time constants utilized in the lead-lag compensator for T_{avg}	$\tau_4 = 22 \text{ sec.}$ $\tau_5 = 4 \text{ sec.}$
Time constant utilized in the measured T_{avg} lag compensator	$\tau_6 = 0 \text{ sec.}$
$f_1(\Delta I)$ "positive" breakpoint	$= 3.0 \text{ } \%\Delta I$
$f_1(\Delta I)$ "negative" breakpoint	$= N/A^*$
$f_1(\Delta I)$ "positive" slope	$= 1.525 \text{ } \%\Delta T_0 / \%\Delta I$
$f_1(\Delta I)$ "negative" slope	$= N/A^*$

- * $f_1(\Delta I)$ negative breakpoints and slopes for OT ΔT are less restrictive than OP ΔT $f_2(\Delta I)$ negative breakpoint and slope. Therefore, during a transient which challenges negative imbalance limits, OP ΔT $f_2(\Delta I)$ limits will result in a reactor trip before OT ΔT $f_1(\Delta I)$ limits are reached. This makes implementation of an OT ΔT $f_1(\Delta I)$ negative breakpoint and slope unnecessary.

Catawba 2 Cycle 24 Core Operating Limits Report

2.9.2 Overpower ΔT Setpoint Parameter Values

<u>Parameter</u>	<u>Nominal Value</u>
Nominal Tavg at RTP	$T'' \leq 590.8 \text{ }^{\circ}\text{F}$
Overpower ΔT reactor trip setpoint	$K_4 = 1.0819$
Overpower ΔT reactor trip penalty	$K_5 = 0.02 \text{ }^{\circ}\text{F}$ for increasing Tavg $K_5 = 0.00 \text{ }^{\circ}\text{F}$ for decreasing Tavg
Overpower ΔT reactor trip heatup setpoint penalty coefficient	$K_6 = 0.001291/^{\circ}\text{F}$ for $T > T''$ $K_6 = 0.0 \text{ }^{\circ}\text{F}$ for $T \leq T''$
Time constants utilized in the lead-lag compensator for ΔT	$\tau_1 = 8 \text{ sec.}$ $\tau_2 = 3 \text{ sec.}$
Time constant utilized in the lag compensator for ΔT	$\tau_3 = 0 \text{ sec.}$
Time constant utilized in the measured Tavg lag compensator	$\tau_6 = 0 \text{ sec.}$
Time constant utilized in the rate-lag controller for Tavg	$\tau_7 = 10 \text{ sec.}$
$f_2(\Delta I)$ "positive" breakpoint	$= 35.0 \text{ } \%\Delta I$
$f_2(\Delta I)$ "negative" breakpoint	$= -35.0 \text{ } \%\Delta I$
$f_2(\Delta I)$ "positive" slope	$= 7.0 \text{ } \%\Delta T_0 / \%\Delta I$
$f_2(\Delta I)$ "negative" slope	$= 7.0 \text{ } \%\Delta T_0 / \%\Delta I$

Catawba 2 Cycle 24 Core Operating Limits Report

2.10 Boron Dilution Mitigation System (TS 3.3.9)

2.10.1 Reactor Makeup Water Pump flow rate limits:

<u>Applicable Mode</u>	<u>Limit</u>
MODE 3	≤ 80 gpm
MODE 4 or 5	≤ 70 gpm

2.11 RCS Pressure, Temperature and Flow Limits for DNB (TS 3.4.1)

RCS pressure, temperature and flow limits for DNB are shown in Table 4.

2.12 Accumulators (TS 3.5.1)

2.12.1 Boron concentration limits during MODES 1 and 2, and MODE 3 with RCS pressure >1000 psi:

<u>Parameter</u>	<u>Applicable Burnup</u>	<u>Limit</u>
Accumulator minimum boron concentration.	0 - 200 EFPD	2,500 ppm
Accumulator minimum boron concentration.	200.1 - 300 EFPD	2,500 ppm
Accumulator minimum boron concentration.	300.1 - 400 EFPD	2,377 ppm
Accumulator minimum boron concentration.	400.1 - 530 EFPD	2,216 ppm
Accumulator minimum boron concentration.	530.1 - 540 EFPD	2,032 ppm
Accumulator <u>maximum</u> boron concentration.	0 - 540 EFPD	3,075 ppm

Catawba 2 Cycle 24 Core Operating Limits Report**Table 4****Reactor Coolant System DNB Parameters**

PARAMETER	INDICATION	No. Operable CHANNELS	LIMITS
1. Indicated RCS Average Temperature	meter	4	≤ 589.6 °F
	meter	3	≤ 589.3 °F
	computer	4	≤ 590.1 °F
	computer	3	≤ 589.9 °F
2. Indicated Pressurizer Pressure	meter	4	≥ 2209.8 psig
	meter	3	≥ 2212.1 psig
	computer	4	≥ 2205.8 psig
	computer	3	≥ 2207.5 psig
3. RCS Total Flow Rate			$\geq 387,000$ gpm

Catawba 2 Cycle 24 Core Operating Limits Report**2.13 Refueling Water Storage Tank - RWST (TS 3.5.4)****2.13.1** Boron concentration limits during MODES 1, 2, 3, and 4:

<u>Parameter</u>	<u>Limit</u>
RWST minimum boron concentration.	2,700 ppm
RWST maximum boron concentration.	3,075 ppm

2.14 Spent Fuel Pool Boron Concentration (TS 3.7.15)**2.14.1** Minimum boron concentration limit for the spent fuel pool. Applicable when fuel assemblies are stored in the spent fuel pool.

<u>Parameter</u>	<u>Limit</u>
Spent fuel pool minimum boron concentration.	2,700 ppm

2.15 Refueling Operations - Boron Concentration (TS 3.9.1)**2.15.1** Minimum boron concentration limit for filled portions of the Reactor Coolant System, refueling canal, and refueling cavity for MODE 6 conditions. The minimum boron concentration limit and plant refueling procedures ensure that core K_{eff} remains within MODE 6 reactivity requirement of $K_{eff} \leq 0.95$.

<u>Parameter</u>	<u>Limit</u>
Minimum boron concentration of the Reactor Coolant System, the refueling canal, and the refueling cavity.	2,700 ppm

Catawba 2 Cycle 24 Core Operating Limits Report

2.16 Standby Shutdown System - (SLC-16.7-9)

2.16.1 Minimum boron concentration limit for the spent fuel pool required for Standby Makeup Pump Water Supply. Applicable for MODES 1, 2, and 3.

<u>Parameter</u>	<u>Limit</u>
Spent fuel pool minimum boron concentration for TR 16.7-9-3.	2,700 ppm

2.17 Borated Water Source – Shutdown (SLC 16.9-11)

2.17.1 Volume and boron concentrations for the Boric Acid Tank (BAT) and the Refueling Water Storage Tank (RWST) during MODE 4 with any RCS cold leg temperature $\leq 210^{\circ}\text{F}$, and MODES 5 and 6.

<u>Parameter</u>	<u>Limit</u>
BAT minimum boron concentration	7,000 ppm
Volume of 7,000 ppm boric acid solution required to maintain SDM at 68 °F	2000 gallons

NOTE: When cycle burnup is > 469 EFPD, Figure 6 may be used to determine required BAT minimum level.

BAT Minimum Shutdown Volume (Includes the additional volumes listed in SLC 16.9-11)	13,086 gallons (14.9% level)
RWST minimum boron concentration	2,700 ppm
Volume of 2,700 ppm boric acid solution required to maintain SDM at 68 °F	7,000 gallons
RWST Minimum Shutdown Volume (Includes the additional volumes listed in SLC 16.9-11)	48,500 gallons (8.7% level)

Catawba 2 Cycle 24 Core Operating Limits Report

2.18 Borated Water Source - Operating (SLC 16.9-12)

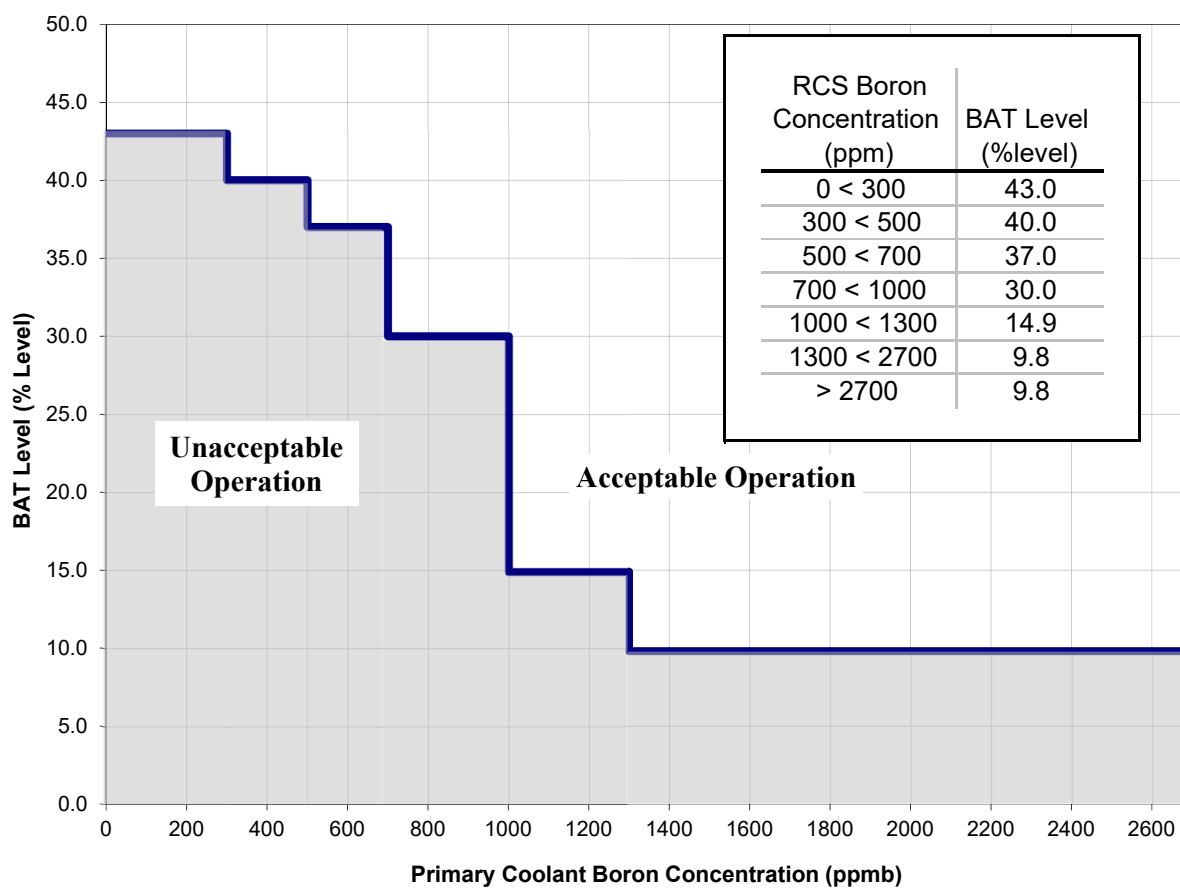
2.18.1 Volume and boron concentrations for the Boric Acid Tank (BAT) and the Refueling Water Storage Tank (RWST) during MODES 1, 2, and 3 and MODE 4 with all RCS cold leg temperatures > 210 °F *.

*** NOTE: The SLC 16.9-12 applicability is down to MODE 4 temperatures of > 210°F. The minimum volumes calculated support cooldown to 200°F to satisfy UFSAR Chapter 9 requirements.**

<u>Parameter</u>	<u>Limit</u>
BAT minimum boron concentration	7,000 ppm
Volume of 7,000 ppm boric acid solution required to maintain SDM at 210°F	13,500 gallons

NOTE: When cycle burnup is > 469 EFPD, Figure 6 may be used to determine required BAT minimum level.

BAT Minimum Shutdown Volume (Includes the additional volumes listed in SLC 16.9-12)	25,200 gallons (45.8% level)
RWST minimum boron concentration	2,700 ppm
Volume of 2,700 ppm boric acid solution required to maintain SDM at 210 °F	57,107 gallons
RWST Minimum Shutdown Volume (Includes the additional volumes listed in SLC 16.9-12)	98,607 gallons (22.0% level)

Catawba 2 Cycle 24 Core Operating Limits Report**Figure 6****Boric Acid Storage Tank Indicated Level Versus
Primary Coolant Boron Concentration****(Valid When Cycle Burnup is > 469 EFPD)****This figure includes additional volumes listed in SLC 16.9-11 and 16.9-12**

Catawba 2 Cycle 24 Core Operating Limits Report

Appendix A

Power Distribution Monitoring Factors

Appendix A contains power distribution monitoring factors used in Technical Specification Surveillance. This data was generated in the Catawba 2 Cycle 24 Maneuvering Analysis calculation file, CNC-1553.05-00-0678, Rev 1. Due to the size of the monitoring factor data, Appendix A is controlled electronically within the Duke document management system and is not included in the Duke internal copies of the COLR. The Plant Reactor Engineering and Systems Support section will control this information via computer file(s) and should be contacted if there is a need to access this information.

Appendix A is available to be transmitted to the NRC.

Attachment

Catawba Unit 2, Cycle 24, Revision 0, Core Operating Limits Report,
Appendix A, Power Distribution Monitoring Factors

Appendix A**Power Distribution Monitoring Factors**

Table	Description	Page
TABLE A-1	F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN), NORMAL OPERATION	2
TABLE A-2	M-SUB-C VALUES (F-SUB-Q RPS MARGIN), NORMAL OPERATION	218
TABLE A-3	F-DEL-H & M-DEL-H VALUES, NORMAL OPERATION	242
TABLE A-4	F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN), POWER ESCALATION	251
TABLE A-5	M-SUB-C VALUES (F-SUB-Q RPS MARGIN), POWER ESCALATION	299
TABLE A-6	F-DEL-H & M-DEL-H VALUES, POWER ESCALATION	311

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 2 of 312

* JOB/DATE QCTK/02Apr2019 CREATED BY SMARG11 COMPILED 20Feb2018 COLR FILE
/nfe/mcd/mle/c2c24/ma/pflr/pflr_ghost.clr
TABLE A-1

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	0.4954	0.5655	0.6671	0.5908	0.6738	0.5717	0.5852	0.3301
	3.4729	3.4491	2.9286	3.2121	2.7980	3.2766	3.1698	5.0623
9	0.5655	0.6378	0.5799	0.6701	0.6060	0.5756	0.5881	0.3390
	3.4491	3.0702	3.3468	2.8651	3.1595	3.2643	3.1695	4.9722
10	0.6671	0.5792	0.5801	0.6233	0.6712	0.5845	0.5733	0.3149
	2.9286	3.3518	3.3748	3.1211	2.9098	3.3150	3.3241	5.3928
11	0.5908	0.6689	0.6221	0.6637	0.5995	0.6227	0.5391	0.2830
	3.2121	2.8687	3.1276	2.9256	3.2400	3.0804	3.6061	6.1833
12	0.6738	0.6052	0.6705	0.5990	0.5039	0.5319	0.3955	
	2.7980	3.1609	2.9129	3.2424	3.5772	3.3937	4.3513	
13	0.5717	0.5754	0.5841	0.6224	0.5316	0.3922	0.2200	
	3.2766	3.2656	3.3172	3.0821	3.3957	4.4808	7.7158	
14	0.5852	0.5880	0.5731	0.5388	0.3950	0.2141		
	3.1698	3.1702	3.3256	3.6085	4.3562	7.8621		
15	0.3301	0.3389	0.3147	0.2828	F-SUB-Q			
	5.0623	4.9729	5.3954	6.1881	M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	1.0769	1.1576	1.4345	1.1891	1.4614	1.2015	1.3857	0.7151
	1.7452	1.7149	1.3842	1.6286	1.3166	1.5901	1.3657	2.3874
9	1.1576	1.4226	1.1696	1.4288	1.2177	1.2852	1.3961	0.7357
	1.7149	1.3984	1.6976	1.3736	1.5968	1.4856	1.3618	2.3427
10	1.4345	1.1681	1.2703	1.2975	1.4282	1.2809	1.3707	0.6806
	1.3842	1.7002	1.5726	1.5304	1.3922	1.5405	1.4174	2.5471
11	1.1891	1.4253	1.2952	1.4217	1.2863	1.4100	1.2964	0.6276
	1.6286	1.3758	1.5336	1.3826	1.5189	1.3819	1.5106	2.8448
12	1.4614	1.2167	1.4270	1.2857	1.1475	1.3086	0.8561	
	1.3166	1.5973	1.3933	1.5196	1.6079	1.4394	2.0458	
13	1.2015	1.2849	1.2804	1.4093	1.3078	0.8495	0.4836	
	1.5901	1.4860	1.5412	1.3825	1.4402	2.1711	3.5867	
14	1.3857	1.3959	1.3702	1.2957	0.8550	0.4699		
	1.3657	1.3620	1.4179	1.5116	2.0481	3.6602		
15	0.7151	0.7356	0.6803	0.6272	F-SUB-Q			
	2.3874	2.3429	2.5483	2.8467	M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 3 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2947	* 1.2911	* 1.3142	* 1.2999	* 1.3993	* 1.3763	* 1.4190	* 0.7846
	* 1.5333	* 1.5481	* 1.5405	* 1.5114	* 1.3889	* 1.4057	* 1.3554	* 2.2046
9	* 1.2911	* 1.4827	* 1.3233	* 1.4672	* 1.3562	* 1.4788	* 1.4380	* 0.8092
	* 1.5481	* 1.3655	* 1.5292	* 1.3627	* 1.4438	* 1.3139	* 1.3447	* 2.1557
10	* 1.3142	* 1.3217	* 1.4661	* 1.4327	* 1.4735	* 1.4669	* 1.4497	* 0.7652
	* 1.5405	* 1.5352	* 1.3820	* 1.4060	* 1.3495	* 1.3593	* 1.3570	* 2.3010
11	* 1.2999	* 1.4649	* 1.4300	* 1.4779	* 1.4437	* 1.4267	* 1.4273	* 0.7155
	* 1.5114	* 1.3649	* 1.4091	* 1.3644	* 1.3708	* 1.3902	* 1.3903	* 2.5298
12	* 1.3993	* 1.3556	* 1.4727	* 1.4429	* 1.4141	* 1.4066	* 0.9436	*
	* 1.3889	* 1.4441	* 1.3503	* 1.3710	* 1.3740	* 1.3800	* 1.8871	*
13	* 1.3763	* 1.4784	* 1.4665	* 1.4260	* 1.4059	* 0.9842	* 0.5518	*
	* 1.4057	* 1.3143	* 1.3598	* 1.3909	* 1.3806	* 1.9426	* 3.2079	*
14	* 1.4190	* 1.4376	* 1.4493	* 1.4265	* 0.9427	* 0.5401	*	
	* 1.3554	* 1.3451	* 1.3575	* 1.3912	* 1.8887	* 3.2490	*	
15	* 0.7846	* 0.8091	* 0.7648	* 0.7150	* F-SUB-Q			
	* 2.2046	* 2.1559	* 2.3021	* 2.5314	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3819	* 1.3628	* 1.3713	* 1.3365	* 1.4987	* 1.4607	* 1.5268	* 0.7950
	* 1.4667	* 1.4950	* 1.3842	* 1.4899	* 1.3132	* 1.3407	* 1.2753	* 2.2040
9	* 1.3628	* 1.5782	* 1.3908	* 1.5567	* 1.4295	* 1.5857	* 1.5520	* 0.8221
	* 1.4950	* 1.3026	* 1.4793	* 1.3080	* 1.3900	* 1.2378	* 1.2630	* 2.1494
10	* 1.3713	* 1.3884	* 1.5616	* 1.5040	* 1.5811	* 1.5713	* 1.5688	* 0.7833
	* 1.3842	* 1.4846	* 1.3149	* 1.3579	* 1.2738	* 1.2848	* 1.2695	* 2.2839
11	* 1.3365	* 1.5478	* 1.5007	* 1.5791	* 1.5329	* 1.5396	* 1.5378	* 0.7356
	* 1.4899	* 1.3110	* 1.3615	* 1.2883	* 1.3053	* 1.3093	* 1.3104	* 2.4922
12	* 1.4987	* 1.4289	* 1.5802	* 1.5325	* 1.5261	* 1.5213	* 0.9630	
	* 1.3132	* 1.3904	* 1.2746	* 1.3056	* 1.2998	* 1.3025	* 1.8829	
13	* 1.4607	* 1.5852	* 1.5708	* 1.5387	* 1.5206	* 1.0374	* 0.5653	
	* 1.3407	* 1.2381	* 1.2853	* 1.3100	* 1.3032	* 1.8866	* 3.1966	
14	* 1.5268	* 1.5516	* 1.5683	* 1.5368	* 0.9624	* 0.5531	*	
	* 1.2753	* 1.2633	* 1.2700	* 1.3113	* 1.8838	* 3.2396	*	
15	* 0.7950	* 0.8220	* 0.7828	* 0.7351	* F-SUB-Q			
	* 2.2040	* 2.1496	* 2.2855	* 2.4940	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 4 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3958	* 1.3735	* 1.3891	* 1.3394	* 1.5305	* 1.4832	* 1.5705	* 0.7997
	* 1.4811	* 1.5119	* 1.5047	* 1.5092	* 1.3046	* 1.3396	* 1.2575	* 2.2245
9	* 1.3735	* 1.6049	* 1.3996	* 1.5826	* 1.4445	* 1.6195	* 1.5994	* 0.8305
	* 1.5119	* 1.3034	* 1.4929	* 1.3038	* 1.3972	* 1.2252	* 1.2434	* 2.1599
10	* 1.3891	* 1.3969	* 1.5798	* 1.5248	* 1.6189	* 1.6038	* 1.6182	* 0.7920
	* 1.5047	* 1.4994	* 1.3184	* 1.3598	* 1.2618	* 1.2760	* 1.2474	* 2.2917
11	* 1.3394	* 1.5742	* 1.5211	* 1.6107	* 1.5648	* 1.5868	* 1.5899	* 0.7458
	* 1.5092	* 1.3064	* 1.3635	* 1.2771	* 1.3032	* 1.2937	* 1.2898	* 2.4919
12	* 1.5305	* 1.4438	* 1.6178	* 1.5644	* 1.5595	* 1.5704	* 0.9802	*
	* 1.3046	* 1.3976	* 1.2627	* 1.3035	* 1.2976	* 1.2872	* 1.8870	*
13	* 1.4832	* 1.6191	* 1.6032	* 1.5858	* 1.5696	* 1.0618	* 0.5705	*
	* 1.3396	* 1.2256	* 1.2765	* 1.2944	* 1.2879	* 1.8838	* 3.2382	*
14	* 1.5705	* 1.5989	* 1.6177	* 1.5888	* 0.9797	* 0.5582	*	*
	* 1.2575	* 1.2438	* 1.2479	* 1.2907	* 1.8877	* 3.2815	*	*
15	* 0.7997	* 0.8305	* 0.7914	* 0.7452	* F-SUB-Q			
	* 2.2245	* 2.1602	* 2.2934	* 2.4938	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3904	* 1.3672	* 1.3873	* 1.3335	* 1.5377	* 1.4881	* 1.5873	* 0.8019
	* 1.5114	* 1.5434	* 1.5284	* 1.5413	* 1.3197	* 1.3576	* 1.2648	* 2.2571
9	* 1.3672	* 1.6053	* 1.3937	* 1.5843	* 1.4446	* 1.6339	* 1.6192	* 0.8342
	* 1.5434	* 1.3211	* 1.5189	* 1.3188	* 1.4216	* 1.2341	* 1.2489	* 2.1875
10	* 1.3873	* 1.3908	* 1.5781	* 1.5287	* 1.6299	* 1.6145	* 1.6388	* 0.7967
	* 1.5284	* 1.5222	* 1.3363	* 1.3760	* 1.2723	* 1.2836	* 1.2499	* 2.3141
11	* 1.3335	* 1.5800	* 1.5247	* 1.6164	* 1.5752	* 1.6064	* 1.6140	* 0.7512
	* 1.5413	* 1.3216	* 1.3796	* 1.2889	* 1.3188	* 1.2994	* 1.2891	* 2.5086
12	* 1.5377	* 1.4437	* 1.6287	* 1.5748	* 1.5702	* 1.5906	* 0.9923	*
	* 1.3197	* 1.4221	* 1.2733	* 1.3191	* 1.3145	* 1.2970	* 1.8993	*
13	* 1.4881	* 1.6334	* 1.6137	* 1.6053	* 1.5897	* 1.0728	* 0.5736	*
	* 1.3576	* 1.2345	* 1.2842	* 1.3003	* 1.2978	* 1.9086	* 3.2953	*
14	* 1.5873	* 1.6185	* 1.6381	* 1.6127	* 0.9918	* 0.5609	*	*
	* 1.2648	* 1.2493	* 1.2505	* 1.2902	* 1.9002	* 3.3414	*	*
15	* 0.8019	* 0.8341	* 0.7961	* 0.7505	* F-SUB-Q			
	* 2.2571	* 2.1878	* 2.3159	* 2.5107	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 5 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3931	* 1.3686	* 1.3960	* 1.3367	* 1.5576	* 1.5020	* 1.6153	* 0.8000 *
	* 1.5320	* 1.5637	* 1.5341	* 1.5667	* 1.3279	* 1.3703	* 1.2671	* 2.3086 *
9	* 1.3686	* 1.6182	* 1.3968	* 1.6008	* 1.4532	* 1.6576	* 1.6494	* 0.8332 *
	* 1.5637	* 1.3221	* 1.5320	* 1.3258	* 1.4409	* 1.2396	* 1.2497	* 2.2343 *
10	* 1.3960	* 1.3937	* 1.5874	* 1.5416	* 1.6539	* 1.6346	* 1.6702	* 0.7964 *
	* 1.5341	* 1.5355	* 1.3435	* 1.3803	* 1.2753	* 1.2860	* 1.2468	* 2.3552 *
11	* 1.3367	* 1.5972	* 1.5373	* 1.6382	* 1.5939	* 1.6363	* 1.6458	* 0.7505 *
	* 1.5667	* 1.3288	* 1.3842	* 1.2908	* 1.3254	* 1.2896	* 1.2759	* 2.5411 *
12	* 1.5576	* 1.4523	* 1.6526	* 1.5935	* 1.5896	* 1.6190	* 0.9933 *	
	* 1.3279	* 1.4414	* 1.2764	* 1.3258	* 1.3228	* 1.2983	* 1.9271 *	
13	* 1.5020	* 1.6570	* 1.6335	* 1.6350	* 1.6181	* 1.0785	* 0.5713 *	
	* 1.3703	* 1.2401	* 1.2867	* 1.2906	* 1.2991	* 1.9348	* 3.3729 *	
14	* 1.6153	* 1.6485	* 1.6693	* 1.6444	* 0.9928	* 0.5578 *		
	* 1.2671	* 1.2503	* 1.2475	* 1.2771	* 1.9279	* 3.4253 *		
15	* 0.8000	* 0.8330	* 0.7957	* 0.7497	* F-SUB-Q			
	* 2.3086	* 2.2347	* 2.3573	* 2.5434	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3894	* 1.3638	* 1.3948	* 1.3342	* 1.5657	* 1.5085	* 1.6302	* 0.7984 *
	* 1.5597	* 1.5941	* 1.5619	* 1.6030	* 1.3504	* 1.3930	* 1.2839	* 2.3670 *
9	* 1.3638	* 1.6193	* 1.3938	* 1.6066	* 1.4551	* 1.6712	* 1.6662	* 0.8320 *
	* 1.5941	* 1.3447	* 1.5625	* 1.3414	* 1.4690	* 1.2567	* 1.2635	* 2.2888 *
10	* 1.3948	* 1.3906	* 1.5886	* 1.5463	* 1.6676	* 1.6451	* 1.6877	* 0.7962 *
	* 1.5619	* 1.5662	* 1.3646	* 1.3978	* 1.2883	* 1.2974	* 1.2569	* 2.4019 *
11	* 1.3342	* 1.6028	* 1.5417	* 1.6502	* 1.6029	* 1.6524	* 1.6639	* 0.7502 *
	* 1.6030	* 1.3445	* 1.4019	* 1.2993	* 1.3368	* 1.2981	* 1.2833	* 2.5747 *
12	* 1.5657	* 1.4541	* 1.6662	* 1.6024	* 1.5993	* 1.6339	* 0.9953 *	
	* 1.3504	* 1.4701	* 1.2895	* 1.3372	* 1.3333	* 1.3040	* 1.9508 *	
13	* 1.5085	* 1.6705	* 1.6438	* 1.6510	* 1.6329	* 1.0813	* 0.5699 *	
	* 1.3930	* 1.2573	* 1.2983	* 1.2992	* 1.3049	* 1.9608	* 3.4259 *	
14	* 1.6302	* 1.6652	* 1.6867	* 1.6623	* 0.9948	* 0.5558 *		
	* 1.2839	* 1.2642	* 1.2577	* 1.2845	* 1.9516	* 3.4831 *		
15	* 0.7984	* 0.8318	* 0.7954	* 0.7493	* F-SUB-Q			
	* 2.3670	* 2.2893	* 2.4041	* 2.5772	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 6 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3897	* 1.3627	* 1.3987	* 1.3352	* 1.5797	* 1.5182	* 1.6494	* 0.7963
	* 1.6047	* 1.6384	* 1.5885	* 1.6412	* 1.3736	* 1.4191	* 1.3027	* 2.4370
9	* 1.3627	* 1.6264	* 1.3947	* 1.6176	* 1.4605	* 1.6884	* 1.6868	* 0.8289
	* 1.6384	* 1.3657	* 1.5903	* 1.3599	* 1.4978	* 1.2762	* 1.2793	* 2.3582
10	* 1.3987	* 1.3913	* 1.5943	* 1.5545	* 1.6854	* 1.6590	* 1.7091	* 0.7951
	* 1.5885	* 1.5942	* 1.3859	* 1.4174	* 1.3035	* 1.3123	* 1.2686	* 2.4600
11	* 1.3352	* 1.6136	* 1.5497	* 1.6666	* 1.6150	* 1.6724	* 1.6846	* 0.7476
	* 1.6412	* 1.3632	* 1.4218	* 1.3195	* 1.3613	* 1.3125	* 1.2942	* 2.6319
12	* 1.5797	* 1.4594	* 1.6838	* 1.6146	* 1.6118	* 1.6522	* 0.9946	*
	* 1.3736	* 1.4989	* 1.3048	* 1.3617	* 1.3592	* 1.3227	* 2.0007	*
13	* 1.5182	* 1.6875	* 1.6575	* 1.6709	* 1.6511	* 1.0823	* 0.5676	*
	* 1.4191	* 1.2769	* 1.3134	* 1.3137	* 1.3236	* 2.0088	* 3.5211	*
14	* 1.6494	* 1.6856	* 1.7078	* 1.6829	* 0.9940	* 0.5529	*	*
	* 1.3027	* 1.2801	* 1.2696	* 1.2955	* 2.0015	* 3.5843	*	*
15	* 0.7963	* 0.8287	* 0.7943	* 0.7467	* F-SUB-Q			
	* 2.4370	* 2.3588	* 2.4624	* 2.6347	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3700	* 1.3428	* 1.3742	* 1.3179	* 1.5596	* 1.5076	* 1.6334	* 0.7975
	* 1.6722	* 1.7038	* 1.6559	* 1.7108	* 1.4338	* 1.4735	* 1.3560	* 2.5095
9	* 1.3428	* 1.6001	* 1.3760	* 1.5963	* 1.4459	* 1.6776	* 1.6725	* 0.8324
	* 1.7038	* 1.4217	* 1.6534	* 1.4153	* 1.5553	* 1.3233	* 1.3283	* 2.4203
10	* 1.3742	* 1.3726	* 1.5756	* 1.5391	* 1.6690	* 1.6467	* 1.6944	* 0.7974
	* 1.6559	* 1.6575	* 1.4390	* 1.4694	* 1.3478	* 1.3572	* 1.3141	* 2.5198
11	* 1.3179	* 1.5922	* 1.5341	* 1.6494	* 1.6019	* 1.6566	* 1.6714	* 0.7517
	* 1.7108	* 1.4189	* 1.4741	* 1.3706	* 1.4109	* 1.3550	* 1.3350	* 2.6842
12	* 1.5596	* 1.4447	* 1.6672	* 1.6015	* 1.5992	* 1.6369	* 1.0035	*
	* 1.4338	* 1.5565	* 1.3491	* 1.4113	* 1.4128	* 1.3753	* 2.0324	*
13	* 1.5076	* 1.6766	* 1.6450	* 1.6549	* 1.6358	* 1.0838	* 0.5707	*
	* 1.4735	* 1.3241	* 1.3585	* 1.3563	* 1.3763	* 2.0729	* 3.6057	*
14	* 1.6334	* 1.6711	* 1.6929	* 1.6695	* 1.0027	* 0.5560	*	*
	* 1.3560	* 1.3292	* 1.3151	* 1.3365	* 2.0336	* 3.6693	*	*
15	* 0.7975	* 0.8322	* 0.7965	* 0.7507	* F-SUB-Q			
	* 2.5095	* 2.4209	* 2.5224	* 2.6873	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 7 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3794	* 1.3505	* 1.3906	* 1.3269	* 1.5879	* 1.5291	* 1.6672	* 0.7925 *
	* 1.7101	* 1.7453	* 1.6883	* 1.7563	* 1.4579	* 1.5050	* 1.3757	* 2.6137 *
9	* 1.3505	* 1.6220	* 1.3859	* 1.6208	* 1.4596	* 1.7066	* 1.7074	* 0.8264 *
	* 1.7453	* 1.4473	* 1.6952	* 1.4390	* 1.5920	* 1.3464	* 1.3455	* 2.5230 *
10	* 1.3906	* 1.3823	* 1.5925	* 1.5575	* 1.7004	* 1.6728	* 1.7305	* 0.7931 *
	* 1.6883	* 1.6997	* 1.4706	* 1.5002	* 1.3643	* 1.3783	* 1.3283	* 2.6144 *
11	* 1.3269	* 1.6164	* 1.5522	* 1.6794	* 1.6241	* 1.6909	* 1.7051	* 0.7461 *
	* 1.7563	* 1.4428	* 1.5052	* 1.3848	* 1.4322	* 1.3690	* 1.3497	* 2.7884 *
12	* 1.5879	* 1.4583	* 1.6986	* 1.6237	* 1.6221	* 1.6682	* 0.9957	*
	* 1.4579	* 1.5933	* 1.3657	* 1.4326	* 1.4319	* 1.3872	* 2.1069	*
13	* 1.5291	* 1.7055	* 1.6709	* 1.6891	* 1.6669	* 1.0836	* 0.5646	*
	* 1.5050	* 1.3473	* 1.3798	* 1.3704	* 1.3882	* 2.1272	* 3.7346	*
14	* 1.6672	* 1.7059	* 1.7289	* 1.7031	* 0.9950	* 0.5490	*	*
	* 1.3757	* 1.3466	* 1.3295	* 1.3512	* 2.1080	* 3.8079	*	*
15	* 0.7925	* 0.8261	* 0.7922	* 0.7451	* F-SUB-Q			
	* 2.6137	* 2.5237	* 2.6173	* 2.7918	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3749	* 1.3451	* 1.3872	* 1.3232	* 1.5923	* 1.5346	* 1.6762	* 0.7907 *
	* 1.7788	* 1.8169	* 1.7526	* 1.8282	* 1.5113	* 1.5595	* 1.4224	* 2.7216 *
9	* 1.3451	* 1.6203	* 1.3820	* 1.6224	* 1.4592	* 1.7157	* 1.7177	* 0.8253 *
	* 1.8169	* 1.5013	* 1.7616	* 1.4899	* 1.6533	* 1.3920	* 1.3884	* 2.6241 *
10	* 1.3872	* 1.3783	* 1.5915	* 1.5590	* 1.7076	* 1.6805	* 1.7411	* 0.7922 *
	* 1.7526	* 1.7664	* 1.5251	* 1.5530	* 1.4090	* 1.4233	* 1.3697	* 2.7138 *
11	* 1.3232	* 1.6179	* 1.5536	* 1.6853	* 1.6283	* 1.7003	* 1.7154	* 0.7452 *
	* 1.8282	* 1.4939	* 1.5583	* 1.4299	* 1.4808	* 1.4118	* 1.3907	* 2.8881 *
12	* 1.5923	* 1.4578	* 1.7056	* 1.6278	* 1.6268	* 1.6760	* 0.9961	*
	* 1.5113	* 1.6547	* 1.4106	* 1.4811	* 1.4792	* 1.4301	* 2.1816	*
13	* 1.5346	* 1.7143	* 1.6784	* 1.6982	* 1.6747	* 1.0840	* 0.5631	*
	* 1.5595	* 1.3930	* 1.4250	* 1.4134	* 1.4312	* 2.1994	* 3.8698	*
14	* 1.6762	* 1.7159	* 1.7393	* 1.7132	* 0.9954	* 0.5471	*	*
	* 1.4224	* 1.3897	* 1.3710	* 1.3924	* 2.1827	* 3.9491	*	*
15	* 0.7907	* 0.8250	* 0.7911	* 0.7441	* F-SUB-Q			
	* 2.7216	* 2.6249	* 2.7170	* 2.8918	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 8 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3578	* 1.3278	* 1.3664	* 1.3079	* 1.5752	* 1.5259	* 1.6631	* 0.7906 *
	* 1.7646	* 1.7981	* 1.7377	* 1.8109	* 1.5075	* 1.5572	* 1.4285	* 2.7146 *
9	* 1.3278	* 1.5979	* 1.3658	* 1.6041	* 1.4462	* 1.7073	* 1.7059	* 0.8270 *
	* 1.7981	* 1.4906	* 1.7424	* 1.4852	* 1.6462	* 1.3959	* 1.3983	* 2.6126 *
10	* 1.3664	* 1.3620	* 1.5751	* 1.5457	* 1.6936	* 1.6714	* 1.7291	* 0.7932 *
	* 1.7377	* 1.7471	* 1.5172	* 1.5447	* 1.4167	* 1.4311	* 1.3810	* 2.7127 *
11	* 1.3079	* 1.5995	* 1.5400	* 1.6706	* 1.6169	* 1.6874	* 1.7045	* 0.7468 *
	* 1.8109	* 1.4893	* 1.5502	* 1.4443	* 1.4937	* 1.4233	* 1.4062	* 2.8918 *
12	* 1.5752	* 1.4448	* 1.6915	* 1.6165	* 1.6160	* 1.6630	* 1.0023	*
	* 1.5075	* 1.6477	* 1.4184	* 1.4941	* 1.4999	* 1.4523	* 2.1770	*
13	* 1.5259	* 1.7058	* 1.6691	* 1.6852	* 1.6616	* 1.0843	* 0.5648	*
	* 1.5572	* 1.3970	* 1.4331	* 1.4250	* 1.4535	* 2.2219	* 3.9039	*
14	* 1.6631	* 1.7040	* 1.7271	* 1.7021	* 1.0014	* 0.5488	*	*
	* 1.4285	* 1.3998	* 1.3825	* 1.4081	* 2.1787	* 3.9831	*	*
15	* 0.7906	* 0.8267	* 0.7921	* 0.7456	* F-SUB-Q			
	* 2.7146	* 2.6136	* 2.7163	* 2.8961	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3651	* 1.3334	* 1.3801	* 1.3143	* 1.6000	* 1.5449	* 1.6940	* 0.7844 *
	* 1.7118	* 1.7464	* 1.6769	* 1.7583	* 1.4489	* 1.5015	* 1.3690	* 2.6678 *
9	* 1.3334	* 1.6165	* 1.3733	* 1.6250	* 1.4567	* 1.7336	* 1.7381	* 0.8193 *
	* 1.7464	* 1.4374	* 1.6906	* 1.4305	* 1.5949	* 1.3416	* 1.3390	* 2.5713 *
10	* 1.3801	* 1.3694	* 1.5887	* 1.5610	* 1.7218	* 1.6954	* 1.7624	* 0.7878 *
	* 1.6769	* 1.6953	* 1.4674	* 1.4920	* 1.3585	* 1.3761	* 1.3216	* 2.6629 *
11	* 1.3143	* 1.6201	* 1.5550	* 1.6973	* 1.6358	* 1.7190	* 1.7353	* 0.7399 *
	* 1.7583	* 1.4346	* 1.4976	* 1.3852	* 1.4385	* 1.3615	* 1.3460	* 2.8442 *
12	* 1.6000	* 1.4552	* 1.7195	* 1.6354	* 1.6361	* 1.6910	* 0.9931	*
	* 1.4489	* 1.5965	* 1.3602	* 1.4389	* 1.4433	* 1.3909	* 2.1397	*
13	* 1.5449	* 1.7320	* 1.6928	* 1.7167	* 1.6895	* 1.0821	* 0.5580	*
	* 1.5015	* 1.3428	* 1.3782	* 1.3633	* 1.3921	* 2.1669	* 3.8424	*
14	* 1.6940	* 1.7360	* 1.7602	* 1.7327	* 0.9923	* 0.5411	*	*
	* 1.3690	* 1.3405	* 1.3232	* 1.3479	* 2.1412	* 3.9278	*	*
15	* 0.7844	* 0.8189	* 0.7867	* 0.7387	* F-SUB-Q			
	* 2.6678	* 2.5723	* 2.6667	* 2.8487	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 9 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3628	* 1.3303	* 1.3799	* 1.3121	* 1.6074	* 1.5526	* 1.7068	* 0.7808
	* 1.6557	* 1.6886	* 1.6181	* 1.6996	* 1.3941	* 1.4452	* 1.3144	* 2.5869
9	* 1.3303	* 1.6185	* 1.3716	* 1.6296	* 1.4574	* 1.7456	* 1.7521	* 0.8157
	* 1.6886	* 1.3849	* 1.6329	* 1.3779	* 1.5409	* 1.2901	* 1.2857	* 2.4928
10	* 1.3799	* 1.3675	* 1.5899	* 1.5645	* 1.7321	* 1.7057	* 1.7770	* 0.7852
	* 1.6181	* 1.6376	* 1.4169	* 1.4388	* 1.3069	* 1.3246	* 1.2688	* 2.5774
11	* 1.3122	* 1.6246	* 1.5583	* 1.7063	* 1.6420	* 1.7323	* 1.7491	* 0.7359
	* 1.6996	* 1.3820	* 1.4443	* 1.3344	* 1.3885	* 1.3080	* 1.2921	* 2.7575
12	* 1.6074	* 1.4558	* 1.7297	* 1.6415	* 1.6430	* 1.7019	* 0.9904	*
	* 1.3941	* 1.5425	* 1.3086	* 1.3889	* 1.3938	* 1.3384	* 2.0711	*
13	* 1.5526	* 1.7438	* 1.7027	* 1.7298	* 1.7003	* 1.0802	* 0.5546	*
	* 1.4452	* 1.2913	* 1.3267	* 1.3098	* 1.3396	* 2.0976	* 3.7232	*
14	* 1.7068	* 1.7498	* 1.7746	* 1.7463	* 0.9896	* 0.5373	*	
	* 1.3144	* 1.2872	* 1.2704	* 1.2941	* 2.0725	* 3.8103	*	
15	* 0.7808	* 0.8153	* 0.7840	* 0.7346	* F-SUB-Q			
	* 2.5869	* 2.4939	* 2.5812	* 2.7621	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3568	* 1.3236	* 1.3742	* 1.3065	* 1.6066	* 1.5540	* 1.7099	* 0.7798
	* 1.6100	* 1.6429	* 1.5737	* 1.6536	* 1.3509	* 1.3982	* 1.2705	* 2.5097
9	* 1.3236	* 1.6135	* 1.3659	* 1.6272	* 1.4541	* 1.7499	* 1.7563	* 0.8158
	* 1.6429	* 1.3451	* 1.5877	* 1.3363	* 1.4955	* 1.2458	* 1.2414	* 2.4148
10	* 1.3742	* 1.3617	* 1.5861	* 1.5627	* 1.7338	* 1.7085	* 1.7816	* 0.7849
	* 1.5737	* 1.5924	* 1.3749	* 1.3944	* 1.2632	* 1.2797	* 1.2249	* 2.4967
11	* 1.3065	* 1.6221	* 1.5564	* 1.7073	* 1.6421	* 1.7356	* 1.7531	* 0.7370
	* 1.6536	* 1.3404	* 1.3999	* 1.2900	* 1.3428	* 1.2627	* 1.2467	* 2.6652
12	* 1.6066	* 1.4525	* 1.7313	* 1.6417	* 1.6435	* 1.7040	* 0.9921	*
	* 1.3509	* 1.4971	* 1.2650	* 1.3432	* 1.3475	* 1.2925	* 1.9995	*
13	* 1.5540	* 1.7480	* 1.7054	* 1.7330	* 1.7023	* 1.0814	* 0.5540	*
	* 1.3982	* 1.2471	* 1.2820	* 1.2646	* 1.2936	* 2.0256	* 3.6044	*
14	* 1.7099	* 1.7539	* 1.7789	* 1.7502	* 0.9912	* 0.5366	*	
	* 1.2705	* 1.2430	* 1.2265	* 1.2487	* 2.0010	* 3.6898	*	
15	* 0.7798	* 0.8154	* 0.7836	* 0.7356	* F-SUB-Q			
	* 2.5097	* 2.4159	* 2.5006	* 2.6699	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 10 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3453	* 1.3120	* 1.3592	* 1.2959	* 1.5935	* 1.5479	* 1.6996	* 0.7817
	* 1.7023	* 1.7381	* 1.6700	* 1.7505	* 1.4297	* 1.4731	* 1.3413	* 2.6291
9	* 1.3120	* 1.5973	* 1.3548	* 1.6135	* 1.4448	* 1.7441	* 1.7470	* 0.8197
	* 1.7381	* 1.4257	* 1.6799	* 1.4143	* 1.5795	* 1.3113	* 1.3090	* 2.5236
10	* 1.3592	* 1.3506	* 1.5746	* 1.5535	* 1.7225	* 1.7019	* 1.7720	* 0.7874
	* 1.6700	* 1.6850	* 1.4530	* 1.4716	* 1.3330	* 1.3471	* 1.2914	* 2.6118
11	* 1.2959	* 1.6082	* 1.5470	* 1.6954	* 1.6336	* 1.7254	* 1.7445	* 0.7401
	* 1.7505	* 1.4187	* 1.4776	* 1.3610	* 1.4140	* 1.3311	* 1.3128	* 2.7841
12	* 1.5935	* 1.4431	* 1.7198	* 1.6331	* 1.6351	* 1.6934	* 0.9996	
	* 1.4297	* 1.5813	* 1.3349	* 1.4143	* 1.4182	* 1.3617	* 2.0793	
13	* 1.5479	* 1.7421	* 1.6986	* 1.7227	* 1.6918	* 1.0835	* 0.5565	
	* 1.4731	* 1.3127	* 1.3496	* 1.3331	* 1.3629	* 2.1168	* 3.7602	
14	* 1.6996	* 1.7445	* 1.7692	* 1.7414	* 0.9985	* 0.5392	*	
	* 1.3413	* 1.3108	* 1.2933	* 1.3149	* 2.0812	* 3.8476	*	
15	* 0.7817	* 0.8193	* 0.7861	* 0.7387	* F-SUB-Q			
	* 2.6291	* 2.5249	* 2.6160	* 2.7892	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3602	* 1.3251	* 1.3814	* 1.3089	* 1.6259	* 1.5719	* 1.7371	* 0.7766 *
	* 1.6351	* 1.6742	* 1.6013	* 1.6906	* 1.3666	* 1.4145	* 1.2796	* 2.5819 *
9	* 1.3251	* 1.6258	* 1.3698	* 1.6427	* 1.4611	* 1.7766	* 1.7854	* 0.8127 *
	* 1.6742	* 1.3645	* 1.6192	* 1.3543	* 1.5229	* 1.2548	* 1.2481	* 2.4832 *
10	* 1.3814	* 1.3653	* 1.5962	* 1.5758	* 1.7569	* 1.7310	* 1.8116	* 0.7827 *
	* 1.6013	* 1.6244	* 1.3967	* 1.4138	* 1.2727	* 1.2903	* 1.2306	* 2.5617 *
11	* 1.3089	* 1.6372	* 1.5690	* 1.7286	* 1.6580	* 1.7631	* 1.7802	* 0.7326 *
	* 1.6906	* 1.3587	* 1.4198	* 1.2984	* 1.3548	* 1.2680	* 1.2522	* 2.7412 *
12	* 1.6259	* 1.4594	* 1.7541	* 1.6575	* 1.6601	* 1.7266	* 0.9902	*
	* 1.3666	* 1.5246	* 1.2746	* 1.3552	* 1.3559	* 1.2980	* 2.0432	*
13	* 1.5719	* 1.7745	* 1.7274	* 1.7602	* 1.7249	* 1.0816	* 0.5500	*
	* 1.4145	* 1.2562	* 1.2929	* 1.2700	* 1.2993	* 2.0609	* 3.7028	*
14	* 1.7371	* 1.7827	* 1.8086	* 1.7770	* 0.9893	* 0.5318	*	
	* 1.2796	* 1.2499	* 1.2325	* 1.2543	* 2.0447	* 3.7968	*	
15	* 0.7766	* 0.8123	* 0.7814	* 0.7311	* F-SUB-Q			
	* 2.5819	* 2.4845	* 2.5661	* 2.7463	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 11 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3645	* 1.3283	* 1.3856	* 1.3123	* 1.6346	* 1.5807	* 1.7476	* 0.7766
	* 1.5694	* 1.6109	* 1.5423	* 1.6297	* 1.3136	* 1.3597	* 1.2292	* 2.5007
9	* 1.3283	* 1.6326	* 1.3744	* 1.6501	* 1.4667	* 1.7893	* 1.7966	* 0.8130
	* 1.6109	* 1.3120	* 1.5586	* 1.3021	* 1.4659	* 1.2037	* 1.1979	* 2.4038
10	* 1.3856	* 1.3699	* 1.6041	* 1.5838	* 1.7658	* 1.7417	* 1.8229	* 0.7829
	* 1.5423	* 1.5636	* 1.3419	* 1.3581	* 1.2215	* 1.2383	* 1.1808	* 2.4788
11	* 1.3123	* 1.6445	* 1.5769	* 1.7375	* 1.6663	* 1.7731	* 1.7888	* 0.7322
	* 1.6297	* 1.3064	* 1.3640	* 1.2446	* 1.2987	* 1.2160	* 1.2019	* 2.6537
12	* 1.6346	* 1.4649	* 1.7630	* 1.6658	* 1.6682	* 1.7344	* 0.9906	*
	* 1.3136	* 1.4676	* 1.2235	* 1.2990	* 1.2981	* 1.2444	* 1.9708	*
13	* 1.5807	* 1.7871	* 1.7380	* 1.7701	* 1.7326	* 1.0826	* 0.5492	*
	* 1.3597	* 1.2051	* 1.2408	* 1.2180	* 1.2456	* 1.9844	* 3.5877	*
14	* 1.7476	* 1.7938	* 1.8199	* 1.7855	* 0.9896	* 0.5308	*	*
	* 1.2292	* 1.1997	* 1.1827	* 1.2041	* 1.9723	* 3.6804	*	*
15	* 0.7766	* 0.8126	* 0.7815	* 0.7307	* F-SUB-Q			
	* 2.5007	* 2.4051	* 2.4831	* 2.6589	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3545	* 1.3186	* 1.3669	* 1.3044	* 1.6126	* 1.5703	* 1.7227	* 0.7822
	* 1.5330	* 1.5743	* 1.5181	* 1.5923	* 1.2927	* 1.3283	* 1.2100	* 2.4121
9	* 1.3186	* 1.6111	* 1.3661	* 1.6296	* 1.4590	* 1.7757	* 1.7720	* 0.8210
	* 1.5743	* 1.2904	* 1.5224	* 1.2799	* 1.4302	* 1.1764	* 1.1779	* 2.3128
10	* 1.3669	* 1.3617	* 1.5948	* 1.5736	* 1.7415	* 1.7286	* 1.7970	* 0.7880
	* 1.5181	* 1.5273	* 1.3098	* 1.3265	* 1.2010	* 1.2097	* 1.1615	* 2.3915
11	* 1.3044	* 1.6240	* 1.5667	* 1.7149	* 1.6541	* 1.7466	* 1.7613	* 0.7390
	* 1.5923	* 1.2842	* 1.3322	* 1.2221	* 1.2676	* 1.1964	* 1.1830	* 2.5526
12	* 1.6126	* 1.4572	* 1.7387	* 1.6537	* 1.6550	* 1.7088	* 1.0014	*
	* 1.2927	* 1.4319	* 1.2029	* 1.2679	* 1.2671	* 1.2233	* 1.8904	*
13	* 1.5703	* 1.7735	* 1.7249	* 1.7436	* 1.7071	* 1.0852	* 0.5545	*
	* 1.3283	* 1.1778	* 1.2123	* 1.1984	* 1.2246	* 1.9183	* 3.4479	*
14	* 1.7227	* 1.7692	* 1.7940	* 1.7580	* 1.0001	* 0.5368	*	*
	* 1.2100	* 1.1797	* 1.1634	* 1.1851	* 1.8924	* 3.5314	*	*
15	* 0.7822	* 0.8205	* 0.7866	* 0.7375	* F-SUB-Q			
	* 2.4121	* 2.3141	* 2.3957	* 2.5576	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 12 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3681	* 1.3326	* 1.3863	* 1.3263	* 1.6311	* 1.5874	* 1.7382	* 0.7807 *
	* 1.4812	* 1.5203	* 1.4614	* 1.5290	* 1.2472	* 1.2819	* 1.1697	* 2.3607 *
9	* 1.3326	* 1.6298	* 1.3840	* 1.6501	* 1.4777	* 1.7947	* 1.7863	* 0.8172 *
	* 1.5203	* 1.2449	* 1.4668	* 1.2335	* 1.3781	* 1.1349	* 1.1393	* 2.2694 *
10	* 1.3863	* 1.3795	* 1.6167	* 1.5959	* 1.7573	* 1.7479	* 1.8120	* 0.7843 *
	* 1.4614	* 1.4715	* 1.2607	* 1.2760	* 1.1604	* 1.1662	* 1.1229	* 2.3458 *
11	* 1.3263	* 1.6445	* 1.5889	* 1.7304	* 1.6731	* 1.7620	* 1.7707	* 0.7326 *
	* 1.5290	* 1.2376	* 1.2815	* 1.1806	* 1.2214	* 1.1557	* 1.1468	* 2.5137 *
12	* 1.6311	* 1.4760	* 1.7544	* 1.6726	* 1.6727	* 1.7200	* 0.9915 *	
	* 1.2472	* 1.3797	* 1.1623	* 1.2217	* 1.2218	* 1.1843	* 1.8620 *	
13	* 1.5874	* 1.7925	* 1.7442	* 1.7590	* 1.7182	* 1.0783	* 0.5494 *	
	* 1.2819	* 1.1362	* 1.1686	* 1.1576	* 1.1855	* 1.8824	* 3.3970 *	
14	* 1.7382	* 1.7835	* 1.8089	* 1.7675	* 0.9903	* 0.5312 *		
	* 1.1697	* 1.1410	* 1.1247	* 1.1489	* 1.8639	* 3.4840 *		
15	* 0.7807	* 0.8167	* 0.7830	* 0.7311	* F-SUB-Q			
	* 2.3607	* 2.2706	* 2.3499	* 2.5188	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3260	* 1.3066	* 1.3846	* 1.3352	* 1.5887	* 1.5537	* 1.6951	* 0.7850 *
	* 1.4999	* 1.5218	* 1.2971	* 1.4903	* 1.1988	* 1.2844	* 1.1760	* 2.3053 *
9	* 1.3066	* 1.5946	* 1.3597	* 1.6316	* 1.4554	* 1.7451	* 1.7360	* 0.8197 *
	* 1.5218	* 1.2483	* 1.4648	* 1.2235	* 1.3725	* 1.1438	* 1.1490	* 2.2214 *
10	* 1.3846	* 1.3563	* 1.5753	* 1.5832	* 1.7199	* 1.7039	* 1.7600	* 0.7815 *
	* 1.2971	* 1.4685	* 1.2693	* 1.2614	* 1.1622	* 1.1724	* 1.1330	* 2.3115 *
11	* 1.3352	* 1.6263	* 1.5766	* 1.6827	* 1.6388	* 1.7186	* 1.7304	* 0.7234 *
	* 1.4903	* 1.2274	* 1.2666	* 1.1901	* 1.2219	* 1.1440	* 1.1498	* 2.4997 *
12	* 1.5887	* 1.4536	* 1.7171	* 1.6384	* 1.6251	* 1.6771	* 0.9929 *	
	* 1.1988	* 1.3741	* 1.1640	* 1.2222	* 1.2324	* 1.1899	* 1.8238 *	
13	* 1.5537	* 1.7431	* 1.7003	* 1.7157	* 1.6754	* 1.0579	* 0.5429 *	
	* 1.2844	* 1.1451	* 1.1749	* 1.1457	* 1.1912	* 1.8818	* 3.3768 *	
14	* 1.6951	* 1.7333	* 1.7570	* 1.7272	* 0.9915 *	* 0.5245 *		
	* 1.1760	* 1.1507	* 1.1349	* 1.1519	* 1.8262	* 3.4652 *		
15	* 0.7850	* 0.8192	* 0.7802	* 0.7219	* F-SUB-Q			
	* 2.3053	* 2.2226	* 2.3155	* 2.5046	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 13 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1252	* 1.1706	* 1.5099	* 1.2227	* 1.6376	* 1.3424	* 1.6599	* 0.7323
	* 1.7436	* 1.6746	* 1.2971	* 1.6050	* 1.1988	* 1.4649	* 1.1817	* 2.4397
9	* 1.1706	* 1.5322	* 1.1901	* 1.5681	* 1.2908	* 1.5228	* 1.6918	* 0.7629
	* 1.6746	* 1.2798	* 1.6484	* 1.2534	* 1.5237	* 1.2912	* 1.1598	* 2.3561
10	* 1.5099	* 1.1883	* 1.3527	* 1.4288	* 1.6415	* 1.4697	* 1.6727	* 0.7061
	* 1.2971	* 1.6509	* 1.4568	* 1.3775	* 1.1988	* 1.3403	* 1.1731	* 2.5257
11	* 1.2227	* 1.5603	* 1.4231	* 1.6273	* 1.4636	* 1.7174	* 1.5804	* 0.6484
	* 1.6050	* 1.2593	* 1.3830	* 1.2103	* 1.3472	* 1.1440	* 1.2402	* 2.7536
12	* 1.6376	* 1.2887	* 1.6385	* 1.4623	* 1.3623	* 1.5940	* 0.9287	*
	* 1.1988	* 1.5262	* 1.2009	* 1.3484	* 1.4483	* 1.2319	* 1.9235	*
13	* 1.3424	* 1.5210	* 1.4666	* 1.7148	* 1.5921	* 0.9483	* 0.4864	*
	* 1.4649	* 1.2927	* 1.3431	* 1.1457	* 1.2334	* 2.0708	* 3.7239	*
14	* 1.6599	* 1.6896	* 1.6700	* 1.5775	* 0.9265	* 0.4705	*	*
	* 1.1817	* 1.1613	* 1.1750	* 1.2424	* 1.9278	* 3.8169	*	*
15	* 0.7323	* 0.7623	* 0.7049	* 0.6471	* F-SUB-Q			
	* 2.4397	* 2.3581	* 2.5300	* 2.7589	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.5000	* 0.5362	* 0.6397	* 0.5657	* 0.6782	* 0.5787	* 0.6323	* 0.3267
	* 3.8893	* 3.6247	* 3.0353	* 3.4389	* 2.8676	* 3.3660	* 3.0761	* 5.4299
9	* 0.5362	* 0.6247	* 0.5484	* 0.6661	* 0.5941	* 0.6157	* 0.6395	* 0.3362
	* 3.6247	* 3.1103	* 3.5472	* 2.9228	* 3.2799	* 3.1635	* 3.0413	* 5.3075
10	* 0.6397	* 0.5470	* 0.5657	* 0.6264	* 0.6945	* 0.6123	* 0.6305	* 0.3159
	* 3.0353	* 3.5561	* 3.4483	* 3.1114	* 2.8053	* 3.1839	* 3.0857	* 5.6055
11	* 0.5657	* 0.6640	* 0.6242	* 0.6896	* 0.6207	* 0.6873	* 0.5925	* 0.2825
	* 3.4389	* 2.9322	* 3.1226	* 2.8280	* 3.1431	* 2.8336	* 3.2817	* 6.2768
12	* 0.6782	* 0.5930	* 0.6932	* 0.6200	* 0.5554	* 0.6062	* 0.4110	*
	* 2.8676	* 3.2860	* 2.8107	* 3.1467	* 3.5152	* 3.2127	* 4.3130	*
13	* 0.5787	* 0.6150	* 0.6111	* 0.6863	* 0.6055	* 0.4279	* 0.2164	*
	* 3.3660	* 3.1670	* 3.1902	* 2.8379	* 3.2164	* 4.5515	* 8.3152	*
14	* 0.6323	* 0.6390	* 0.6295	* 0.5915	* 0.4100	* 0.2128	*	*
	* 3.0761	* 3.0439	* 3.0906	* 3.2877	* 4.3234	* 8.3843	*	*
15	* 0.3267	* 0.3361	* 0.3155	* 0.2820	* F-SUB-Q			
	* 5.4299	* 5.3102	* 5.6134	* 6.2887	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 14 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 75 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.3994	* 0.4536	* 0.5357	* 0.4766	* 0.5427	* 0.4604	* 0.4778	* 0.2701
	* 4.2157	* 4.2111	* 3.5665	* 3.9068	* 3.4080	* 3.9900	* 3.8102	* 6.0557
9	* 0.4536	* 0.5141	* 0.4668	* 0.5442	* 0.4898	* 0.4686	* 0.4804	* 0.2780
	* 4.2111	* 3.7277	* 4.0754	* 3.4682	* 3.8389	* 3.9375	* 3.8087	* 5.9372
10	* 0.5357	* 0.4661	* 0.4704	* 0.5066	* 0.5466	* 0.4773	* 0.4715	* 0.2590
	* 3.5665	* 4.0814	* 4.0857	* 3.7754	* 3.5034	* 3.9880	* 3.9737	* 6.4239
11	* 0.4766	* 0.5433	* 0.5056	* 0.5406	* 0.4848	* 0.5118	* 0.4461	* 0.2346
	* 3.9068	* 3.4718	* 3.7832	* 3.5027	* 3.8784	* 3.6617	* 4.2541	* 7.3241
12	* 0.5427	* 0.4893	* 0.5460	* 0.4844	* 0.4125	* 0.4408	* 0.3245	*
	* 3.4080	* 3.8411	* 3.5074	* 3.8803	* 4.2485	* 4.0113	* 5.1656	*
13	* 0.4604	* 0.4683	* 0.4770	* 0.5116	* 0.4405	* 0.3240	* 0.1842	*
	* 3.9899	* 3.9388	* 3.9907	* 3.6637	* 4.0136	* 5.3183	* 8.9953	*
14	* 0.4778	* 0.4803	* 0.4713	* 0.4458	* 0.3241	* 0.1792	*	*
	* 3.8102	* 3.8096	* 3.9756	* 4.2570	* 5.1714	* 9.1528	*	*
15	* 0.2701	* 0.2779	* 0.2588	* 0.2344	* F-SUB-Q			
	* 6.0557	* 5.9380	* 6.4270	* 7.3296	* M-SUB-Q			

AT 100% POWER, 75 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.8918	* 0.9636	* 1.1956	* 0.9975	* 1.2164	* 1.0052	* 1.1607	* 0.6083
	* 2.0760	* 2.0247	* 1.6301	* 1.9073	* 1.5567	* 1.8667	* 1.6034	* 2.7497
9	* 0.9636	* 1.1844	* 0.9790	* 1.2034	* 1.0229	* 1.0803	* 1.1693	* 0.6258
	* 2.0247	* 1.6506	* 1.9896	* 1.6006	* 1.8717	* 1.7371	* 1.5990	* 2.6959
10	* 1.1956	* 0.9777	* 1.0607	* 1.0908	* 1.2078	* 1.0801	* 1.1537	* 0.5808
	* 1.6301	* 1.9927	* 1.8512	* 1.7914	* 1.6106	* 1.7971	* 1.6567	* 2.9261
11	* 0.9975	* 1.2013	* 1.0888	* 1.2017	* 1.0898	* 1.1866	* 1.1001	* 0.5385
	* 1.9073	* 1.6031	* 1.7951	* 1.6044	* 1.7597	* 1.6103	* 1.7441	* 3.2569
12	* 1.2164	* 1.0221	* 1.2067	* 1.0893	* 0.9772	* 1.1102	* 0.7276	*
	* 1.5567	* 1.8724	* 1.6118	* 1.7605	* 1.8565	* 1.6668	* 2.3519	*
13	* 1.0052	* 1.0800	* 1.0797	* 1.1860	* 1.1096	* 0.7243	* 0.4191	*
	* 1.8667	* 1.7376	* 1.7981	* 1.6111	* 1.6676	* 2.5045	* 4.0522	*
14	* 1.1607	* 1.1691	* 1.1533	* 1.0994	* 0.7267	* 0.4073	*	*
	* 1.6034	* 1.5993	* 1.6574	* 1.7452	* 2.3546	* 4.1281	*	*
15	* 0.6083	* 0.6258	* 0.5805	* 0.5381	* F-SUB-Q			
	* 2.7497	* 2.6961	* 2.9275	* 3.2590	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 15 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 75 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1104	* 1.1329	* 1.2250	* 1.1655	* 1.2897	* 1.2081	* 1.2842	* 0.7137 *
	* 1.7640	* 1.7532	* 1.6155	* 1.6599	* 1.4824	* 1.5772	* 1.4721	* 2.3797 *
9	* 1.1329	* 1.3211	* 1.1508	* 1.3283	* 1.1996	* 1.3007	* 1.3041	* 0.7368 *
	* 1.7532	* 1.5103	* 1.7230	* 1.4801	* 1.6179	* 1.4645	* 1.4617	* 2.3248 *
10	* 1.2250	* 1.1494	* 1.2743	* 1.2743	* 1.3311	* 1.2972	* 1.3039	* 0.6929 *
	* 1.6155	* 1.7293	* 1.5658	* 1.5582	* 1.4787	* 1.5150	* 1.4901	* 2.4900 *
11	* 1.1655	* 1.3262	* 1.2718	* 1.3297	* 1.2906	* 1.3205	* 1.2946	* 0.6491 *
	* 1.6599	* 1.4809	* 1.5618	* 1.4814	* 1.5150	* 1.4728	* 1.5062	* 2.7427 *
12	* 1.2897	* 1.1985	* 1.3298	* 1.2898	* 1.2504	* 1.2790	* 0.8586	*
	* 1.4824	* 1.6183	* 1.4795	* 1.5159	* 1.5305	* 1.4940	* 2.0316	*
13	* 1.2081	* 1.3004	* 1.2967	* 1.3198	* 1.2784	* 0.8897	* 0.5027	*
	* 1.5772	* 1.4649	* 1.5157	* 1.4736	* 1.4947	* 2.1164	* 3.4548	*
14	* 1.2842	* 1.3038	* 1.3034	* 1.2938	* 0.8574	* 0.4922	*	
	* 1.4721	* 1.4620	* 1.4906	* 1.5071	* 2.0341	* 3.4936	*	
15	* 0.7137	* 0.7367	* 0.6926	* 0.6486	* F-SUB-Q			
	* 2.3797	* 2.3251	* 2.4912	* 2.7445	* M-SUB-Q			

AT 100% POWER, 75 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2238	* 1.2340	* 1.3520	* 1.2626	* 1.4402	* 1.3318	* 1.4497	* 0.7629 *
	* 1.6397	* 1.6428	* 1.4939	* 1.5572	* 1.3480	* 1.4524	* 1.3235	* 2.2610 *
9	* 1.2340	* 1.4705	* 1.2576	* 1.4729	* 1.3055	* 1.4549	* 1.4759	* 0.7894 *
	* 1.6428	* 1.3827	* 1.6070	* 1.3574	* 1.5026	* 1.3289	* 1.3119	* 2.2039 *
10	* 1.3520	* 1.2558	* 1.4032	* 1.3948	* 1.4918	* 1.4420	* 1.4797	* 0.7445 *
	* 1.4939	* 1.6140	* 1.4444	* 1.4469	* 1.3395	* 1.3821	* 1.3336	* 2.3593 *
11	* 1.2626	* 1.4703	* 1.3917	* 1.4816	* 1.4253	* 1.4994	* 1.4680	* 0.7001 *
	* 1.5572	* 1.3596	* 1.4505	* 1.3535	* 1.3964	* 1.3222	* 1.3526	* 2.5799 *
12	* 1.4402	* 1.3047	* 1.4909	* 1.4244	* 1.3968	* 1.4508	* 0.9235	*
	* 1.3480	* 1.5030	* 1.3404	* 1.3967	* 1.4026	* 1.3477	* 1.9285	*
13	* 1.3318	* 1.4545	* 1.4414	* 1.4985	* 1.4501	* 0.9814	* 0.5380	*
	* 1.4524	* 1.3293	* 1.3826	* 1.3230	* 1.3483	* 1.9683	* 3.3033	*
14	* 1.4497	* 1.4754	* 1.4791	* 1.4671	* 0.9230	* 0.5268	*	
	* 1.3235	* 1.3123	* 1.3341	* 1.3535	* 1.9295	* 3.3407	*	
15	* 0.7629	* 0.7893	* 0.7440	* 0.6996	* F-SUB-Q			
	* 2.2610	* 2.2041	* 2.3606	* 2.5817	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 16 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 75 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2713	* 1.2826	* 1.4223	* 1.3128	* 1.5245	* 1.3942	* 1.5422	* 0.7974 *
	* 1.6162	* 1.6164	* 1.4469	* 1.5254	* 1.2966	* 1.4122	* 1.2661	* 2.2033 *
9	* 1.2826	* 1.5455	* 1.3061	* 1.5528	* 1.3614	* 1.5369	* 1.5728	* 0.8284 *
	* 1.6164	* 1.3435	* 1.5768	* 1.3106	* 1.4684	* 1.2798	* 1.2527	* 2.1388 *
10	* 1.4223	* 1.3041	* 1.4608	* 1.4598	* 1.5869	* 1.5167	* 1.5794	* 0.7807 *
	* 1.4469	* 1.5838	* 1.4117	* 1.4070	* 1.2866	* 1.3320	* 1.2709	* 2.2904 *
11	* 1.3128	* 1.5498	* 1.4562	* 1.5677	* 1.4986	* 1.6042	* 1.5724	* 0.7362 *
	* 1.5254	* 1.3130	* 1.4106	* 1.3047	* 1.3573	* 1.2630	* 1.2895	* 2.4931 *
12	* 1.5245	* 1.3605	* 1.5858	* 1.4975	* 1.4703	* 1.5491	* 0.9750	*
	* 1.2966	* 1.4687	* 1.2875	* 1.3576	* 1.3641	* 1.2913	* 1.8689	*
13	* 1.3942	* 1.5364	* 1.5160	* 1.6032	* 1.5483	* 1.0383	* 0.5626	*
	* 1.4122	* 1.2802	* 1.3326	* 1.2638	* 1.2920	* 1.9067	* 3.2388	*
14	* 1.5422	* 1.5723	* 1.5787	* 1.5713	* 0.9745	* 0.5506	*	
	* 1.2661	* 1.2531	* 1.2714	* 1.2904	* 1.8698	* 3.2766	*	
15	* 0.7974	* 0.8283	* 0.7802	* 0.7356	* F-SUB-Q			
	* 2.2033	* 2.1391	* 2.2918	* 2.4950	* M-SUB-Q			

AT 100% POWER, 75 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2957	* 1.3092	* 1.4612	* 1.3432	* 1.5739	* 1.4326	* 1.5993	* 0.8228 *
	* 1.6190	* 1.6147	* 1.4355	* 1.5222	* 1.2823	* 1.3990	* 1.2463	* 2.1811 *
9	* 1.3092	* 1.5856	* 1.3327	* 1.6000	* 1.3951	* 1.5885	* 1.6333	* 0.8561 *
	* 1.6147	* 1.3332	* 1.5752	* 1.2968	* 1.4640	* 1.2631	* 1.2309	* 2.1136 *
10	* 1.4612	* 1.3306	* 1.4931	* 1.5001	* 1.6458	* 1.5633	* 1.6423	* 0.8075 *
	* 1.4355	* 1.5826	* 1.4071	* 1.3949	* 1.2653	* 1.3131	* 1.2455	* 2.2571 *
11	* 1.3432	* 1.5967	* 1.4962	* 1.6198	* 1.5444	* 1.6701	* 1.6398	* 0.7623 *
	* 1.5222	* 1.2993	* 1.3986	* 1.2899	* 1.3471	* 1.2383	* 1.2604	* 2.4496 *
12	* 1.5739	* 1.3942	* 1.6446	* 1.5432	* 1.5156	* 1.6113	* 1.0148	*
	* 1.2823	* 1.4644	* 1.2662	* 1.3475	* 1.3549	* 1.2716	* 1.8373	*
13	* 1.4326	* 1.5880	* 1.5624	* 1.6689	* 1.6103	* 1.0768	* 0.5814	*
	* 1.3990	* 1.2636	* 1.3138	* 1.2392	* 1.2724	* 1.8886	* 3.2185	*
14	* 1.5993	* 1.6326	* 1.6414	* 1.6385	* 1.0142	* 0.5687	*	
	* 1.2463	* 1.2313	* 1.2461	* 1.2614	* 1.8382	* 3.2580	*	
15	* 0.8228	* 0.8560	* 0.8068	* 0.7617	* F-SUB-Q			
	* 2.1811	* 2.1139	* 2.2586	* 2.4516	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 17 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 75 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3206	* 1.3355	* 1.5019	* 1.3739	* 1.6254	* 1.4735	* 1.6601	* 0.8389
	* 1.6198	* 1.6090	* 1.4255	* 1.5240	* 1.2723	* 1.3917	* 1.2302	* 2.1929
9	* 1.3355	* 1.6292	* 1.3598	* 1.6501	* 1.4291	* 1.6415	* 1.6965	* 0.8736
	* 1.6090	* 1.3176	* 1.5764	* 1.2845	* 1.4647	* 1.2514	* 1.2129	* 2.1226
10	* 1.5019	* 1.3574	* 1.5271	* 1.5412	* 1.7067	* 1.6109	* 1.7076	* 0.8244
	* 1.4255	* 1.5824	* 1.4011	* 1.3833	* 1.2401	* 1.2983	* 1.2236	* 2.2639
11	* 1.3739	* 1.6465	* 1.5370	* 1.6742	* 1.5902	* 1.7374	* 1.7073	* 0.7780
	* 1.5240	* 1.2871	* 1.3872	* 1.2708	* 1.3337	* 1.2123	* 1.2292	* 2.4421
12	* 1.6254	* 1.4281	* 1.7053	* 1.5890	* 1.5616	* 1.6736	* 1.0379	*
	* 1.2723	* 1.4651	* 1.2411	* 1.3347	* 1.3470	* 1.2541	* 1.8340	*
13	* 1.4735	* 1.6408	* 1.6098	* 1.7360	* 1.6726	* 1.1044	* 0.5913	*
	* 1.3917	* 1.2520	* 1.2991	* 1.2132	* 1.2549	* 1.8870	* 3.2442	*
14	* 1.6601	* 1.6958	* 1.7065	* 1.7059	* 1.0374	* 0.5775	*	*
	* 1.2302	* 1.2134	* 1.2244	* 1.2303	* 1.8348	* 3.2888	*	*
15	* 0.8389	* 0.8735	* 0.8237	* 0.7773	* F-SUB-Q			
	* 2.1929	* 2.1230	* 2.2659	* 2.4443	* M-SUB-Q			

AT 100% POWER, 75 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3343	* 1.3502	* 1.5248	* 1.3926	* 1.6583	* 1.5031	* 1.7012	* 0.8514
	* 1.6399	* 1.6293	* 1.4333	* 1.5444	* 1.2824	* 1.4031	* 1.2347	* 2.2226
9	* 1.3502	* 1.6541	* 1.3754	* 1.6814	* 1.4508	* 1.6784	* 1.7398	* 0.8873
	* 1.6293	* 1.3294	* 1.5919	* 1.2893	* 1.4833	* 1.2576	* 1.2142	* 2.1491
10	* 1.5248	* 1.3729	* 1.5478	* 1.5680	* 1.7473	* 1.6458	* 1.7524	* 0.8379
	* 1.4333	* 1.5962	* 1.4088	* 1.3859	* 1.2395	* 1.3005	* 1.2192	* 2.2832
11	* 1.3926	* 1.6775	* 1.5635	* 1.7092	* 1.6207	* 1.7836	* 1.7545	* 0.7908
	* 1.5444	* 1.2922	* 1.3899	* 1.2728	* 1.3370	* 1.2077	* 1.2244	* 2.4477
12	* 1.6583	* 1.4496	* 1.7458	* 1.6194	* 1.5922	* 1.7162	* 1.0577	*
	* 1.2824	* 1.4838	* 1.2406	* 1.3380	* 1.3482	* 1.2479	* 1.8383	*
13	* 1.5031	* 1.6776	* 1.6446	* 1.7821	* 1.7151	* 1.1251	* 0.5996	*
	* 1.4031	* 1.2583	* 1.3014	* 1.2087	* 1.2487	* 1.8938	* 3.2616	*
14	* 1.7012	* 1.7389	* 1.7512	* 1.7529	* 1.0572	* 0.5850	*	*
	* 1.2347	* 1.2148	* 1.2200	* 1.2255	* 1.8391	* 3.3103	*	*
15	* 0.8514	* 0.8871	* 0.8371	* 0.7899	* F-SUB-Q			
	* 2.2226	* 2.1495	* 2.2853	* 2.4500	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 18 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 75 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3469	* 1.3630	* 1.5471	* 1.4092	* 1.6905	* 1.5303	* 1.7409	* 0.8599 *
	* 1.6819	* 1.6573	* 1.4493	* 1.5735	* 1.2990	* 1.4235	* 1.2463	* 2.2727 *
9	* 1.3630	* 1.6788	* 1.3895	* 1.7116	* 1.4706	* 1.7131	* 1.7814	* 0.8949 *
	* 1.6573	* 1.3386	* 1.6159	* 1.3007	* 1.5063	* 1.2714	* 1.2225	* 2.2000 *
10	* 1.5471	* 1.3869	* 1.5675	* 1.5928	* 1.7862	* 1.6782	* 1.7953	* 0.8472 *
	* 1.4493	* 1.6189	* 1.4266	* 1.3996	* 1.2445	* 1.3102	* 1.2219	* 2.3233 *
11	* 1.4092	* 1.7076	* 1.5880	* 1.7429	* 1.6488	* 1.8276	* 1.7984	* 0.7978 *
	* 1.5735	* 1.3038	* 1.4038	* 1.2829	* 1.3555	* 1.2147	* 1.2244	* 2.4866 *
12	* 1.6905	* 1.4694	* 1.7845	* 1.6475	* 1.6207	* 1.7564	* 1.0707	*
	* 1.2990	* 1.5075	* 1.2456	* 1.3565	* 1.3700	* 1.2589	* 1.8732	*
13	* 1.5303	* 1.7122	* 1.6768	* 1.8259	* 1.7552	* 1.1409	* 0.6048	*
	* 1.4235	* 1.2721	* 1.3114	* 1.2158	* 1.2598	* 1.9281	* 3.3325	*
14	* 1.7409	* 1.7803	* 1.7939	* 1.7966	* 1.0701	* 0.5893	*	*
	* 1.2463	* 1.2232	* 1.2229	* 1.2256	* 1.8740	* 3.3864	*	*
15	* 0.8599	* 0.8947	* 0.8464	* 0.7969	* F-SUB-Q			
	* 2.2727	* 2.2005	* 2.3256	* 2.4891	* M-SUB-Q			

AT 100% POWER, 75 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3375	* 1.3541	* 1.5336	* 1.4031	* 1.6840	* 1.5319	* 1.7388	* 0.8700 *
	* 1.7413	* 1.7156	* 1.5093	* 1.6363	* 1.3523	* 1.4754	* 1.2945	* 2.3312 *
9	* 1.3541	* 1.6646	* 1.3817	* 1.7034	* 1.4671	* 1.7158	* 1.7817	* 0.9080 *
	* 1.7156	* 1.3912	* 1.6768	* 1.3504	* 1.5612	* 1.3159	* 1.2659	* 2.2480 *
10	* 1.5336	* 1.3791	* 1.5604	* 1.5894	* 1.7846	* 1.6810	* 1.7962	* 0.8581 *
	* 1.5093	* 1.6800	* 1.4792	* 1.4483	* 1.2822	* 1.3513	* 1.2620	* 2.3711 *
11	* 1.4031	* 1.6992	* 1.5845	* 1.7375	* 1.6481	* 1.8285	* 1.8021	* 0.8104 *
	* 1.6363	* 1.3537	* 1.4527	* 1.3241	* 1.3927	* 1.2483	* 1.2586	* 2.5259 *
12	* 1.6840	* 1.4658	* 1.7828	* 1.6468	* 1.6208	* 1.7577	* 1.0913	*
	* 1.3523	* 1.5625	* 1.2835	* 1.3938	* 1.4167	* 1.2996	* 1.8913	*
13	* 1.5319	* 1.7147	* 1.6793	* 1.8267	* 1.7564	* 1.1527	* 0.6141	*
	* 1.4754	* 1.3167	* 1.3526	* 1.2494	* 1.3008	* 1.9798	* 3.3930	*
14	* 1.7388	* 1.7805	* 1.7946	* 1.8002	* 1.0904	* 0.5985	*	*
	* 1.2945	* 1.2668	* 1.2631	* 1.2599	* 1.8926	* 3.4468	*	*
15	* 0.8700	* 0.9078	* 0.8572	* 0.8094	* F-SUB-Q			
	* 2.3312	* 2.2486	* 2.3735	* 2.5286	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 19 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 75 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3507	* 1.3670	* 1.5597	* 1.4196	* 1.7204	* 1.5599	* 1.7850	* 0.8700 *
	* 1.7857	* 1.7619	* 1.5384	* 1.6820	* 1.3787	* 1.5098	* 1.3140	* 2.4257 *
9	* 1.3670	* 1.6947	* 1.3959	* 1.7382	* 1.4867	* 1.7531	* 1.8294	* 0.9074 *
	* 1.7619	* 1.4178	* 1.7229	* 1.3733	* 1.6010	* 1.3412	* 1.2831	* 2.3417 *
10	* 1.5597	* 1.3931	* 1.5812	* 1.6152	* 1.8283	* 1.7152	* 1.8453	* 0.8593 *
	* 1.5384	* 1.7263	* 1.5156	* 1.4801	* 1.2986	* 1.3754	* 1.2752	* 2.4589 *
11	* 1.4196	* 1.7338	* 1.6100	* 1.7756	* 1.6772	* 1.8779	* 1.8508	* 0.8096 *
	* 1.6820	* 1.3767	* 1.4848	* 1.3436	* 1.4184	* 1.2610	* 1.2720	* 2.6218 *
12	* 1.7204	* 1.4853	* 1.8263	* 1.6759	* 1.6502	* 1.8021	* 1.0908 *	
	* 1.3787	* 1.6023	* 1.2999	* 1.4195	* 1.4395	* 1.3111	* 1.9592 *	
13	* 1.5599	* 1.7519	* 1.7133	* 1.8759	* 1.8007	* 1.1605	* 0.6114 *	
	* 1.5098	* 1.3421	* 1.3768	* 1.2622	* 1.3124	* 2.0299	* 3.5146 *	
14	* 1.7850	* 1.8281	* 1.8434	* 1.8487	* 1.0900	* 0.5948 *		
	* 1.3140	* 1.2840	* 1.2764	* 1.2734	* 1.9602	* 3.5773 *		
15	* 0.8700	* 0.9071	* 0.8583	* 0.8085	* F-SUB-Q			
	* 2.4257	* 2.3423	* 2.4615	* 2.6249	* M-SUB-Q			

AT 100% POWER, 75 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3479	* 1.3642	* 1.5601	* 1.4196	* 1.7292	* 1.5691	* 1.8008	* 0.8718 *
	* 1.8360	* 1.8106	* 1.5811	* 1.7348	* 1.4268	* 1.5689	* 1.3615	* 2.5275 *
9	* 1.3642	* 1.6965	* 1.3941	* 1.7450	* 1.4892	* 1.7668	* 1.8468	* 0.9104 *
	* 1.8106	* 1.4562	* 1.7704	* 1.4180	* 1.6607	* 1.3906	* 1.3274	* 2.4366 *
10	* 1.5601	* 1.3913	* 1.5824	* 1.6204	* 1.8426	* 1.7275	* 1.8636	* 0.8621 *
	* 1.5811	* 1.7739	* 1.5652	* 1.5293	* 1.3436	* 1.4245	* 1.3166	* 2.5546 *
11	* 1.4196	* 1.7404	* 1.6150	* 1.7852	* 1.6850	* 1.8964	* 1.8706	* 0.8126 *
	* 1.7348	* 1.4216	* 1.5343	* 1.3918	* 1.4711	* 1.3025	* 1.3125	* 2.7177 *
12	* 1.7292	* 1.4878	* 1.8404	* 1.6836	* 1.6590	* 1.8185	* 1.0966 *	
	* 1.4268	* 1.6623	* 1.3450	* 1.4723	* 1.4913	* 1.3529	* 2.0296 *	
13	* 1.5691	* 1.7654	* 1.7253	* 1.8942	* 1.8169	* 1.1659	* 0.6125 *	
	* 1.5689	* 1.3916	* 1.4262	* 1.3039	* 1.3542	* 2.1014	* 3.6449 *	
14	* 1.8008	* 1.8453	* 1.8616	* 1.8683	* 1.0958	* 0.5953 *		
	* 1.3615	* 1.3284	* 1.3179	* 1.3140	* 2.0308	* 3.7129 *		
15	* 0.8718	* 0.9101	* 0.8610	* 0.8114	* F-SUB-Q			
	* 2.5275	* 2.4373	* 2.5575	* 2.7211	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 20 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 75 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3307	* 1.3471	* 1.5374	* 1.4045	* 1.7125	* 1.5614	* 1.7890	* 0.8747 *
	* 1.8181	* 1.7879	* 1.5644	* 1.7099	* 1.4052	* 1.5423	* 1.3462	* 2.4857 *
9	* 1.3471	* 1.6730	* 1.3779	* 1.7265	* 1.4763	* 1.7593	* 1.8370	* 0.9147 *
	* 1.7879	* 1.4403	* 1.7467	* 1.3985	* 1.6343	* 1.3726	* 1.3153	* 2.3922 *
10	* 1.5374	* 1.3751	* 1.5658	* 1.6071	* 1.8304	* 1.7200	* 1.8543	* 0.8654 *
	* 1.5644	* 1.7502	* 1.5434	* 1.5048	* 1.3299	* 1.4096	* 1.3079	* 2.5184 *
11	* 1.4045	* 1.7218	* 1.6016	* 1.7692	* 1.6740	* 1.8862	* 1.8637	* 0.8166 *
	* 1.7099	* 1.4022	* 1.5099	* 1.3737	* 1.4567	* 1.2944	* 1.3068	* 2.6840 *
12	* 1.7125	* 1.4748	* 1.8281	* 1.6725	* 1.6493	* 1.8093	* 1.1067	*
	* 1.4052	* 1.6359	* 1.3315	* 1.4578	* 1.4889	* 1.3541	* 1.9971	*
13	* 1.5614	* 1.7578	* 1.7176	* 1.8840	* 1.8076	* 1.1683	* 0.6159	*
	* 1.5423	* 1.3737	* 1.4115	* 1.2959	* 1.3556	* 2.0949	* 3.6311	*
14	* 1.7890	* 1.8353	* 1.8521	* 1.8612	* 1.1057	* 0.5987	*	*
	* 1.3462	* 1.3165	* 1.3094	* 1.3085	* 1.9987	* 3.6980	*	*
15	* 0.8747	* 0.9143	* 0.8643	* 0.8153	* F-SUB-Q			
	* 2.4857	* 2.3931	* 2.5216	* 2.6879	* M-SUB-Q			

AT 100% POWER, 75 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3321	* 1.3480	* 1.5481	* 1.4080	* 1.7326	* 1.5761	* 1.8198	* 0.8669 *
	* 1.7705	* 1.7388	* 1.5122	* 1.6628	* 1.3571	* 1.4937	* 1.2938	* 2.4422 *
9	* 1.3480	* 1.6873	* 1.3799	* 1.7451	* 1.4823	* 1.7817	* 1.8693	* 0.9060 *
	* 1.7388	* 1.3910	* 1.6984	* 1.3513	* 1.5902	* 1.3259	* 1.2643	* 2.3532 *
10	* 1.5481	* 1.3768	* 1.5725	* 1.6184	* 1.8580	* 1.7397	* 1.8880	* 0.8595 *
	* 1.5122	* 1.7019	* 1.5005	* 1.4599	* 1.2802	* 1.3627	* 1.2556	* 2.4718 *
11	* 1.4080	* 1.7401	* 1.6126	* 1.7913	* 1.6888	* 1.9192	* 1.8972	* 0.8087 *
	* 1.6628	* 1.3550	* 1.4650	* 1.3261	* 1.4115	* 1.2425	* 1.2539	* 2.6411 *
12	* 1.7326	* 1.4807	* 1.8556	* 1.6872	* 1.6645	* 1.8391	* 1.0971	*
	* 1.3571	* 1.5918	* 1.2819	* 1.4127	* 1.4409	* 1.3003	* 1.9667	*
13	* 1.5761	* 1.7800	* 1.7371	* 1.9168	* 1.8369	* 1.1661	* 0.6081	*
	* 1.4937	* 1.3270	* 1.3647	* 1.2440	* 1.3018	* 2.0479	* 3.5785	*
14	* 1.8198	* 1.8674	* 1.8856	* 1.8945	* 1.0962	* 0.5900	*	*
	* 1.2938	* 1.2655	* 1.2572	* 1.2556	* 1.9681	* 3.6514	*	*
15	* 0.8669	* 0.9056	* 0.8583	* 0.8074	* F-SUB-Q			
	* 2.4422	* 2.3541	* 2.4752	* 2.6451	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 21 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 75 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3213	* 1.3371	* 1.5392	* 1.3990	* 1.7308	* 1.5760	* 1.8262	* 0.8604 *
	* 1.7131	* 1.6824	* 1.4597	* 1.6067	* 1.3045	* 1.4353	* 1.2389	* 2.3631 *
9	* 1.3371	* 1.6800	* 1.3697	* 1.7418	* 1.4752	* 1.7850	* 1.8770	* 0.8992 *
	* 1.6824	* 1.3410	* 1.6424	* 1.2997	* 1.5343	* 1.2722	* 1.2102	* 2.2770 *
10	* 1.5392	* 1.3666	* 1.5637	* 1.6136	* 1.8619	* 1.7417	* 1.8970	* 0.8541 *
	* 1.4597	* 1.6460	* 1.4482	* 1.4058	* 1.2290	* 1.3093	* 1.2021	* 2.3872 *
11	* 1.3990	* 1.7367	* 1.6076	* 1.7919	* 1.6867	* 1.9269	* 1.9071	* 0.8020 *
	* 1.6067	* 1.3033	* 1.4108	* 1.2743	* 1.3602	* 1.1919	* 1.2003	* 2.5551 *
12	* 1.7308	* 1.4735	* 1.8593	* 1.6851	* 1.6631	* 1.8460	* 1.0915	*
	* 1.3045	* 1.5359	* 1.2306	* 1.3613	* 1.3913	* 1.2478	* 1.8968	*
13	* 1.5760	* 1.7832	* 1.7388	* 1.9244	* 1.8438	* 1.1616	* 0.6024	*
	* 1.4353	* 1.2734	* 1.3113	* 1.1934	* 1.2493	* 1.9758	* 3.4621	*
14	* 1.8262	* 1.8750	* 1.8944	* 1.9042	* 1.0906	* 0.5838	*	*
	* 1.2389	* 1.2114	* 1.2036	* 1.2020	* 1.8981	* 3.5365	*	*
15	* 0.8604	* 0.8988	* 0.8528	* 0.8006	* F-SUB-Q			
	* 2.3631	* 2.2780	* 2.3907	* 2.5592	* M-SUB-Q			

AT 100% POWER, 75 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3035	* 1.3186	* 1.5191	* 1.3816	* 1.7157	* 1.5651	* 1.8160	* 0.8536 *
	* 1.6717	* 1.6427	* 1.4242	* 1.5673	* 1.2672	* 1.3917	* 1.1995	* 2.2952 *
9	* 1.3186	* 1.6600	* 1.3519	* 1.7250	* 1.4595	* 1.7753	* 1.8681	* 0.8937 *
	* 1.6427	* 1.3067	* 1.6025	* 1.2636	* 1.4932	* 1.2314	* 1.1703	* 2.2071 *
10	* 1.5191	* 1.3488	* 1.5462	* 1.5982	* 1.8502	* 1.7312	* 1.8887	* 0.8482 *
	* 1.4242	* 1.6061	* 1.4103	* 1.3663	* 1.1896	* 1.2675	* 1.1616	* 2.3145 *
11	* 1.3816	* 1.7198	* 1.5921	* 1.7792	* 1.6732	* 1.9173	* 1.8995	* 0.7982 *
	* 1.5673	* 1.2673	* 1.3714	* 1.2365	* 1.3189	* 1.1514	* 1.1584	* 2.4707 *
12	* 1.7157	* 1.4578	* 1.8476	* 1.6715	* 1.6506	* 1.8368	* 1.0867	*
	* 1.2672	* 1.4949	* 1.1913	* 1.3202	* 1.3480	* 1.2050	* 1.8317	*
13	* 1.5651	* 1.7735	* 1.7281	* 1.9146	* 1.8345	* 1.1541	* 0.5977	*
	* 1.3917	* 1.2326	* 1.2696	* 1.1529	* 1.2065	* 1.9111	* 3.3553	*
14	* 1.8160	* 1.8660	* 1.8858	* 1.8965	* 1.0857	* 0.5791	*	*
	* 1.1995	* 1.1715	* 1.1632	* 1.1601	* 1.8331	* 3.4284	*	*
15	* 0.8536	* 0.8932	* 0.8469	* 0.7968	* F-SUB-Q			
	* 2.2952	* 2.2081	* 2.3180	* 2.4749	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 22 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 75 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2762	* 1.2908	* 1.4833	* 1.3546	* 1.6821	* 1.5412	* 1.7846	* 0.8477 *
	* 1.7792	* 1.7498	* 1.5216	* 1.6681	* 1.3482	* 1.4741	* 1.2729	* 2.4128 *
9	* 1.2908	* 1.6224	* 1.3245	* 1.6899	* 1.4328	* 1.7493	* 1.8376	* 0.8885 *
	* 1.7498	* 1.3942	* 1.7063	* 1.3452	* 1.5866	* 1.3031	* 1.2401	* 2.3167 *
10	* 1.4833	* 1.3214	* 1.5161	* 1.5694	* 1.8178	* 1.7052	* 1.8583	* 0.8420 *
	* 1.5216	* 1.7102	* 1.5000	* 1.4508	* 1.2613	* 1.3410	* 1.2300	* 2.4317 *
11	* 1.3546	* 1.6847	* 1.5632	* 1.7468	* 1.6453	* 1.8855	* 1.8708	* 0.7933 *
	* 1.6681	* 1.3493	* 1.4563	* 1.3139	* 1.3965	* 1.2184	* 1.2242	* 2.5918 *
12	* 1.6822	* 1.4311	* 1.8151	* 1.6437	* 1.6235	* 1.8071	* 1.0836	*
	* 1.3482	* 1.5884	* 1.2631	* 1.3979	* 1.4257	* 1.2739	* 1.9120	*
13	* 1.5412	* 1.7474	* 1.7020	* 1.8828	* 1.8048	* 1.1433	* 0.5940	*
	* 1.4741	* 1.3045	* 1.3434	* 1.2201	* 1.2754	* 2.0068	* 3.5162	*
14	* 1.7846	* 1.8354	* 1.8553	* 1.8677	* 1.0824	* 0.5757	*	*
	* 1.2729	* 1.2415	* 1.2318	* 1.2261	* 1.9138	* 3.5913	*	*
15	* 0.8477	* 0.8881	* 0.8407	* 0.7918	* F-SUB-Q			
	* 2.4128	* 2.3179	* 2.4355	* 2.5964	* M-SUB-Q			

AT 100% POWER, 75 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2661	* 1.2795	* 1.4794	* 1.3433	* 1.6835	* 1.5375	* 1.7937	* 0.8276 *
	* 1.7230	* 1.7009	* 1.4715	* 1.6246	* 1.3011	* 1.4282	* 1.2234	* 2.3903 *
9	* 1.2795	* 1.6216	* 1.3138	* 1.6905	* 1.4231	* 1.7505	* 1.8472	* 0.8666 *
	* 1.7009	* 1.3445	* 1.6594	* 1.2972	* 1.5425	* 1.2577	* 1.1907	* 2.2978 *
10	* 1.4795	* 1.3106	* 1.5078	* 1.5637	* 1.8234	* 1.7040	* 1.8689	* 0.8237 *
	* 1.4715	* 1.6633	* 1.4545	* 1.4043	* 1.2109	* 1.2947	* 1.1794	* 2.4016 *
11	* 1.3433	* 1.6851	* 1.5574	* 1.7503	* 1.6398	* 1.8940	* 1.8793	* 0.7726 *
	* 1.6246	* 1.3013	* 1.4098	* 1.2635	* 1.3483	* 1.1664	* 1.1727	* 2.5691 *
12	* 1.6835	* 1.4214	* 1.8205	* 1.6381	* 1.6189	* 1.8130	* 1.0571	*
	* 1.3010	* 1.5443	* 1.2127	* 1.3496	* 1.3712	* 1.2192	* 1.8856	*
13	* 1.5375	* 1.7485	* 1.7006	* 1.8911	* 1.8106	* 1.1248	* 0.5773	*
	* 1.4282	* 1.2591	* 1.2972	* 1.1681	* 1.2208	* 1.9584	* 3.4859	*
14	* 1.7937	* 1.8449	* 1.8658	* 1.8761	* 1.0561	* 0.5585	*	*
	* 1.2234	* 1.1921	* 1.1812	* 1.1747	* 1.8871	* 3.5678	*	*
15	* 0.8276	* 0.8661	* 0.8223	* 0.7710	* F-SUB-Q			
	* 2.3903	* 2.2990	* 2.4055	* 2.5739	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 23 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 75 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2401	* 1.2521	* 1.4476	* 1.3149	* 1.6520	* 1.5107	* 1.7636	* 0.8090
	* 1.6891	* 1.6729	* 1.4475	* 1.5985	* 1.2763	* 1.3991	* 1.1974	* 2.3562
9	* 1.2521	* 1.5898	* 1.2869	* 1.6587	* 1.3950	* 1.7227	* 1.8172	* 0.8475
	* 1.6729	* 1.3200	* 1.6311	* 1.2727	* 1.5148	* 1.2295	* 1.1642	* 2.2638
10	* 1.4476	* 1.2837	* 1.4795	* 1.5348	* 1.7914	* 1.6756	* 1.8383	* 0.8055
	* 1.4475	* 1.6350	* 1.4268	* 1.3767	* 1.1849	* 1.2662	* 1.1528	* 2.3650
11	* 1.3149	* 1.6533	* 1.5285	* 1.7194	* 1.6093	* 1.8612	* 1.8472	* 0.7549
	* 1.5985	* 1.2768	* 1.3823	* 1.2365	* 1.3201	* 1.1400	* 1.1462	* 2.5311
12	* 1.6520	* 1.3933	* 1.7885	* 1.6077	* 1.5896	* 1.7805	* 1.0344	*
	* 1.2763	* 1.5166	* 1.1867	* 1.3214	* 1.3386	* 1.1914	* 1.8519	*
13	* 1.5107	* 1.7206	* 1.6721	* 1.8583	* 1.7781	* 1.1009	* 0.5634	*
	* 1.3991	* 1.2309	* 1.2688	* 1.1417	* 1.1930	* 1.9205	* 3.4363	*
14	* 1.7636	* 1.8149	* 1.8352	* 1.8439	* 1.0334	* 0.5448	*	*
	* 1.1974	* 1.1656	* 1.1547	* 1.1481	* 1.8535	* 3.5185	*	*
15	* 0.8090	* 0.8470	* 0.8041	* 0.7534	* F-SUB-Q			
	* 2.3562	* 2.2650	* 2.3690	* 2.5359	* M-SUB-Q			

AT 100% POWER, 75 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1952	* 1.2056	* 1.3824	* 1.2666	* 1.5802	* 1.4558	* 1.6861	* 0.7908
	* 1.6955	* 1.6818	* 1.4674	* 1.6068	* 1.2913	* 1.4048	* 1.2125	* 2.3354
9	* 1.2056	* 1.5204	* 1.2411	* 1.5874	* 1.3454	* 1.6589	* 1.7381	* 0.8294
	* 1.6818	* 1.3360	* 1.6375	* 1.2870	* 1.5201	* 1.2350	* 1.1771	* 2.2408
10	* 1.3824	* 1.2380	* 1.4279	* 1.4783	* 1.7133	* 1.6142	* 1.7566	* 0.7858
	* 1.4674	* 1.6415	* 1.4307	* 1.3830	* 1.1977	* 1.2708	* 1.1660	* 2.3478
11	* 1.2666	* 1.5822	* 1.4722	* 1.6464	* 1.5491	* 1.7775	* 1.7642	* 0.7389
	* 1.6068	* 1.2912	* 1.3886	* 1.2480	* 1.3255	* 1.1530	* 1.1595	* 2.5039
12	* 1.5802	* 1.3437	* 1.7105	* 1.5474	* 1.5311	* 1.7002	* 1.0135	*
	* 1.2913	* 1.5220	* 1.1996	* 1.3268	* 1.3423	* 1.2048	* 1.8274	*
13	* 1.4558	* 1.6569	* 1.6109	* 1.7747	* 1.6979	* 1.0689	* 0.5515	*
	* 1.4048	* 1.2364	* 1.2734	* 1.1548	* 1.2064	* 1.9115	* 3.3979	*
14	* 1.6861	* 1.7358	* 1.7536	* 1.7611	* 1.0122	* 0.5341	*	*
	* 1.2125	* 1.1786	* 1.1678	* 1.1615	* 1.8295	* 3.4738	*	*
15	* 0.7908	* 0.8290	* 0.7844	* 0.7374	* F-SUB-Q			
	* 2.3354	* 2.2420	* 2.3517	* 2.5087	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 24 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 75 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1613	* 1.1708	* 1.3404	* 1.2305	* 1.5284	* 1.4117	* 1.6306	* 0.7533
	* 1.6993	* 1.6865	* 1.4752	* 1.6106	* 1.2996	* 1.4099	* 1.2198	* 2.3886
9	* 1.1708	* 1.4758	* 1.2068	* 1.5403	* 1.3069	* 1.6090	* 1.6802	* 0.7892
	* 1.6865	* 1.3401	* 1.6399	* 1.2911	* 1.5234	* 1.2386	* 1.1844	* 2.2948
10	* 1.3404	* 1.2038	* 1.3917	* 1.4378	* 1.6569	* 1.5662	* 1.6972	* 0.7485
	* 1.4752	* 1.6439	* 1.4289	* 1.3837	* 1.2045	* 1.2739	* 1.1735	* 2.4009
11	* 1.2305	* 1.5353	* 1.4319	* 1.5946	* 1.5040	* 1.7150	* 1.6984	* 0.7008
	* 1.6106	* 1.2952	* 1.3893	* 1.2531	* 1.3278	* 1.1616	* 1.1709	* 2.5714
12	* 1.5284	* 1.3053	* 1.6543	* 1.5028	* 1.4853	* 1.6383	* 0.9603	*
	* 1.2996	* 1.5251	* 1.2064	* 1.3289	* 1.3454	* 1.2163	* 1.8765	*
13	* 1.4117	* 1.6071	* 1.5629	* 1.7124	* 1.6365	* 1.0194	* 0.5234	*
	* 1.4099	* 1.2400	* 1.2765	* 1.1634	* 1.2176	* 1.9499	* 3.4877	*
14	* 1.6306	* 1.6781	* 1.6943	* 1.6954	* 0.9591	* 0.5062	*	*
	* 1.2198	* 1.1859	* 1.1754	* 1.1729	* 1.8785	* 3.5705	*	*
15	* 0.7533	* 0.7887	* 0.7472	* 0.6994	* F-SUB-Q			
	* 2.3886	* 2.2960	* 2.4049	* 2.5763	* M-SUB-Q			

AT 100% POWER, 75 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0777	* 1.1017	* 1.2594	* 1.1625	* 1.4141	* 1.3120	* 1.4969	* 0.7091
	* 1.7941	* 1.7557	* 1.5377	* 1.6696	* 1.3752	* 1.4850	* 1.3008	* 2.4876
9	* 1.1017	* 1.3681	* 1.1310	* 1.4347	* 1.2246	* 1.4864	* 1.5396	* 0.7411
	* 1.7557	* 1.4159	* 1.7162	* 1.3570	* 1.5914	* 1.3121	* 1.2649	* 2.3954
10	* 1.2594	* 1.1265	* 1.2971	* 1.3514	* 1.5271	* 1.4492	* 1.5530	* 0.7006
	* 1.5377	* 1.7209	* 1.5012	* 1.4410	* 1.2787	* 1.3469	* 1.2548	* 2.5144
11	* 1.1625	* 1.4302	* 1.3461	* 1.4763	* 1.4076	* 1.5730	* 1.5551	* 0.6514
	* 1.6696	* 1.3612	* 1.4466	* 1.3223	* 1.3879	* 1.2387	* 1.2512	* 2.7119
12	* 1.4141	* 1.2232	* 1.5248	* 1.4064	* 1.3743	* 1.5033	* 0.9000	*
	* 1.3752	* 1.5935	* 1.2806	* 1.3890	* 1.4227	* 1.2963	* 1.9609	*
13	* 1.3120	* 1.4847	* 1.4463	* 1.5707	* 1.5017	* 0.9437	* 0.4889	*
	* 1.4850	* 1.3135	* 1.3495	* 1.2406	* 1.2980	* 2.0625	* 3.6614	*
14	* 1.4969	* 1.5377	* 1.5504	* 1.5524	* 0.8987	* 0.4725	*	*
	* 1.3008	* 1.2665	* 1.2568	* 1.2533	* 1.9635	* 3.7510	*	*
15	* 0.7091	* 0.7407	* 0.6994	* 0.6501	* F-SUB-Q			
	* 2.4876	* 2.3966	* 2.5185	* 2.7170	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 25 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 75 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.8765	* 0.9312	* 1.2258	* 0.9874	* 1.3102	* 1.0736	* 1.3487	* 0.6101
	* 2.1746	* 2.0470	* 1.5561	* 1.9365	* 1.4614	* 1.7869	* 1.4206	* 2.8522
9	* 0.9312	* 1.2212	* 0.9530	* 1.2753	* 1.0366	* 1.2153	* 1.3753	* 0.6354
	* 2.0470	* 1.5620	* 2.0041	* 1.5008	* 1.8491	* 1.5788	* 1.3939	* 2.7557
10	* 1.2258	* 0.9505	* 1.0658	* 1.1445	* 1.3464	* 1.1809	* 1.3658	* 0.5900
	* 1.5561	* 2.0090	* 1.7992	* 1.6754	* 1.4258	* 1.6272	* 1.4038	* 2.9451
11	* 0.9874	* 1.2712	* 1.1403	* 1.3297	* 1.1826	* 1.3989	* 1.3106	* 0.5453
	* 1.9365	* 1.5057	* 1.6815	* 1.4444	* 1.6256	* 1.3717	* 1.4616	* 3.1963
12	* 1.3102	* 1.0350	* 1.3442	* 1.1817	* 1.0972	* 1.3152	* 0.7725	*
	* 1.4614	* 1.8519	* 1.4281	* 1.6269	* 1.7537	* 1.4583	* 2.2516	*
13	* 1.0736	* 1.2140	* 1.1787	* 1.3969	* 1.3138	* 0.7846	* 0.4121	*
	* 1.7869	* 1.5805	* 1.6301	* 1.3735	* 1.4599	* 2.4448	* 4.2874	*
14	* 1.3487	* 1.3736	* 1.3638	* 1.3085	* 0.7707	* 0.3987	*	*
	* 1.4206	* 1.3955	* 1.4058	* 1.4640	* 2.2566	* 4.3877	*	*
15	* 0.6101	* 0.6351	* 0.5890	* 0.5442	* F-SUB-Q			
	* 2.8522	* 2.7570	* 2.9497	* 3.2020	* M-SUB-Q			

AT 100% POWER, 75 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.3804	* 0.4113	* 0.4976	* 0.4388	* 0.5256	* 0.4466	* 0.4987	* 0.2605
	* 4.9684	* 4.5949	* 3.7986	* 4.3192	* 3.6079	* 4.2547	* 3.8080	* 6.6290
9	* 0.4113	* 0.4811	* 0.4238	* 0.5214	* 0.4607	* 0.4770	* 0.5053	* 0.2681
	* 4.5949	* 3.9283	* 4.4669	* 3.6380	* 4.1222	* 3.9841	* 3.7597	* 6.4812
10	* 0.4976	* 0.4229	* 0.4344	* 0.4852	* 0.5462	* 0.4777	* 0.5006	* 0.2528
	* 3.7986	* 4.4772	* 4.3722	* 3.9145	* 3.4802	* 3.9814	* 3.7953	* 6.8226
11	* 0.4388	* 0.5198	* 0.4837	* 0.5402	* 0.4837	* 0.5440	* 0.4755	* 0.2282
	* 4.3192	* 3.6488	* 3.9267	* 3.5196	* 3.9328	* 3.4946	* 3.9951	* 7.5847
12	* 0.5256	* 0.4599	* 0.5454	* 0.4832	* 0.4341	* 0.4843	* 0.3275	*
	* 3.6079	* 4.1290	* 3.4856	* 3.9367	* 4.3869	* 3.9263	* 5.2710	*
13	* 0.4466	* 0.4765	* 0.4768	* 0.5432	* 0.4838	* 0.3404	* 0.1764	*
	* 4.2547	* 3.9881	* 3.9881	* 3.4994	* 3.9305	* 5.5900	* 9.9474	*
14	* 0.4987	* 0.5047	* 0.4999	* 0.4747	* 0.3267	* 0.1735	*	*
	* 3.8080	* 3.7640	* 3.8008	* 4.0017	* 5.2830	* 10.0154	*	*
15	* 0.2605	* 0.2680	* 0.2525	* 0.2277	* F-SUB-Q			
	* 6.6290	* 6.4841	* 6.8312	* 7.5979	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 26 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 125 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.3766	* 0.4271	* 0.5041	* 0.4489	* 0.5100	* 0.4330	* 0.4518	* 0.2557
	* 4.4267	* 4.4424	* 3.7588	* 4.1259	* 3.6115	* 4.2207	* 4.0104	* 6.3502
9	* 0.4271	* 0.4845	* 0.4399	* 0.5140	* 0.4617	* 0.4424	* 0.4543	* 0.2632
	* 4.4424	* 3.9304	* 4.2972	* 3.6518	* 4.0535	* 4.1513	* 4.0083	* 6.2235
10	* 0.5041	* 0.4393	* 0.4446	* 0.4779	* 0.5165	* 0.4507	* 0.4474	* 0.2455
	* 3.7588	* 4.3033	* 4.2966	* 3.9802	* 3.6822	* 4.2025	* 4.1693	* 6.7243
11	* 0.4489	* 0.5132	* 0.4770	* 0.5115	* 0.4579	* 0.4855	* 0.4240	* 0.2233
	* 4.1259	* 3.6553	* 3.9882	* 3.6776	* 4.0733	* 3.8328	* 4.4386	* 7.6454
12	* 0.5100	* 0.4613	* 0.5159	* 0.4577	* 0.3896	* 0.4195	* 0.3067	*
	* 3.6115	* 4.0561	* 3.6854	* 4.0752	* 4.4362	* 4.1870	* 5.4133	*
13	* 0.4330	* 0.4421	* 0.4505	* 0.4852	* 0.4192	* 0.3074	* 0.1770	*
	* 4.2207	* 4.1526	* 4.2053	* 3.8348	* 4.1893	* 5.5669	* 9.2667	*
14	* 0.4518	* 0.4543	* 0.4472	* 0.4237	* 0.3063	* 0.1722	*	*
	* 4.0104	* 4.0091	* 4.1712	* 4.4416	* 5.4193	* 9.4295	*	*
15	* 0.2557	* 0.2632	* 0.2454	* 0.2232	* F-SUB-Q			
	* 6.3502	* 6.2243	* 6.7273	* 7.6508	* M-SUB-Q			

AT 100% POWER, 125 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.8427	* 0.9113	* 1.1286	* 0.9456	* 1.1457	* 0.9493	* 1.0958	* 0.5798
	* 2.1853	* 2.1280	* 1.7155	* 2.0030	* 1.6445	* 1.9675	* 1.6909	* 2.8652
9	* 0.9113	* 1.1179	* 0.9286	* 1.1413	* 0.9698	* 1.0211	* 1.1038	* 0.5965
	* 2.1280	* 1.7377	* 2.0841	* 1.6787	* 1.9671	* 1.8300	* 1.6864	* 2.8090
10	* 1.1286	* 0.9275	* 1.0040	* 1.0341	* 1.1465	* 1.0241	* 1.0918	* 0.5539
	* 1.7155	* 2.0872	* 1.9447	* 1.8800	* 1.6858	* 1.8819	* 1.7430	* 3.0459
11	* 0.9456	* 1.1394	* 1.0322	* 1.1402	* 1.0363	* 1.1226	* 1.0448	* 0.5151
	* 2.0030	* 1.6812	* 1.8838	* 1.6804	* 1.8394	* 1.6912	* 1.8243	* 3.3820
12	* 1.1457	* 0.9690	* 1.1456	* 1.0358	* 0.9299	* 1.0541	* 0.6914	*
	* 1.6445	* 1.9678	* 1.6870	* 1.8403	* 1.9401	* 1.7451	* 2.4529	*
13	* 0.9493	* 1.0208	* 1.0236	* 1.1221	* 1.0536	* 0.6904	* 0.4046	*
	* 1.9675	* 1.8306	* 1.8829	* 1.6919	* 1.7460	* 2.6137	* 4.1567	*
14	* 1.0958	* 1.1037	* 1.0915	* 1.0442	* 0.6906	* 0.3934	*	*
	* 1.6909	* 1.6867	* 1.7436	* 1.8254	* 2.4557	* 4.2341	*	*
15	* 0.5798	* 0.5964	* 0.5537	* 0.5147	* F-SUB-Q			
	* 2.8652	* 2.8093	* 3.0472	* 3.3841	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355

Appendix A, Rev. 0

Page 27 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 125 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0592 *	* 1.0933 *	* 1.2313 *	* 1.1310 *	* 1.2722 *	* 1.1566 *	* 1.2473 *	* 0.6963 *
	* 1.8405 *	* 1.8074 *	* 1.5973 *	* 1.7022 *	* 1.4981 *	* 1.6403 *	* 1.5096 *	* 2.4231 *
9	* 1.0933 *	* 1.2800 *	* 1.1083 *	* 1.2922 *	* 1.1584 *	* 1.2498 *	* 1.2650 *	* 0.7190 *
	* 1.8074 *	* 1.5507 *	* 1.7790 *	* 1.5099 *	* 1.6748 *	* 1.5182 *	* 1.5009 *	* 2.3666 *
10	* 1.2313 *	* 1.1074 *	* 1.2201 *	* 1.2311 *	* 1.2953 *	* 1.2459 *	* 1.2632 *	* 0.6749 *
	* 1.5973 *	* 1.7820 *	* 1.6264 *	* 1.6052 *	* 1.5135 *	* 1.5710 *	* 1.5361 *	* 2.5385 *
11	* 1.1310 *	* 1.2902 *	* 1.2286 *	* 1.2940 *	* 1.2488 *	* 1.2982 *	* 1.2539 *	* 0.6320 *
	* 1.7022 *	* 1.5107 *	* 1.6087 *	* 1.5136 *	* 1.5573 *	* 1.4895 *	* 1.5455 *	* 2.7968 *
12	* 1.2722 *	* 1.1574 *	* 1.2941 *	* 1.2481 *	* 1.2013 *	* 1.2413 *	* 0.8350 *	
	* 1.4981 *	* 1.6754 *	* 1.5146 *	* 1.5582 *	* 1.5851 *	* 1.5312 *	* 2.0712 *	
13	* 1.1566 *	* 1.2495 *	* 1.2454 *	* 1.2976 *	* 1.2407 *	* 0.8651 *	* 0.4933 *	
	* 1.6403 *	* 1.5187 *	* 1.5716 *	* 1.4903 *	* 1.5319 *	* 2.1653 *	* 3.4877 *	
14	* 1.2473 *	* 1.2647 *	* 1.2627 *	* 1.2533 *	* 0.8339 *	* 0.4830 *		
	* 1.5096 *	* 1.5012 *	* 1.5368 *	* 1.5463 *	* 2.0737 *	* 3.5276 *		
15	* 0.6963 *	* 0.7189 *	* 0.6746 *	* 0.6315 *	* F-SUB-Q			
	* 2.4231 *	* 2.3668 *	* 2.5397 *	* 2.7985 *	* M-SUB-Q			

AT 100% POWER, 125 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1780 *	* 1.2084 *	* 1.3873 *	* 1.2462 *	* 1.4477 *	* 1.2876 *	* 1.4294 *	* 0.7561 *
	* 1.6965 *	* 1.6700 *	* 1.4431 *	* 1.5703 *	* 1.3352 *	* 1.4967 *	* 1.3356 *	* 2.2662 *
9	* 1.2084 *	* 1.4469 *	* 1.2237 *	* 1.4560 *	* 1.2778 *	* 1.4114 *	* 1.4544 *	* 0.7823 *
	* 1.6700 *	* 1.3985 *	* 1.6396 *	* 1.3618 *	* 1.5414 *	* 1.3643 *	* 1.3255 *	* 2.2089 *
10	* 1.3873 *	* 1.2225 *	* 1.3560 *	* 1.3662 *	* 1.4681 *	* 1.3978 *	* 1.4502 *	* 0.7337 *
	* 1.4431 *	* 1.6461 *	* 1.4870 *	* 1.4699 *	* 1.3532 *	* 1.4212 *	* 1.3518 *	* 2.3712 *
11	* 1.2462 *	* 1.4536 *	* 1.3632 *	* 1.4637 *	* 1.3956 *	* 1.4943 *	* 1.4397 *	* 0.6903 *
	* 1.5703 *	* 1.3625 *	* 1.4732 *	* 1.3641 *	* 1.4220 *	* 1.3193 *	* 1.3709 *	* 2.6000 *
12	* 1.4477 *	* 1.2766 *	* 1.4673 *	* 1.3947 *	* 1.3541 *	* 1.4260 *	* 0.9114 *	
	* 1.3352 *	* 1.5417 *	* 1.3540 *	* 1.4229 *	* 1.4399 *	* 1.3638 *	* 1.9374 *	
13	* 1.2876 *	* 1.4111 *	* 1.3972 *	* 1.4935 *	* 1.4253 *	* 0.9661 *	* 0.5344 *	
	* 1.4967 *	* 1.3647 *	* 1.4217 *	* 1.3200 *	* 1.3645 *	* 1.9890 *	* 3.2946 *	
14	* 1.4295 *	* 1.4540 *	* 1.4497 *	* 1.4389 *	* 0.9109 *	* 0.5234 *		
	* 1.3356 *	* 1.3258 *	* 1.3524 *	* 1.3718 *	* 1.9384 *	* 3.3317 *		
15	* 0.7561 *	* 0.7823 *	* 0.7333 *	* 0.6899 *	* F-SUB-Q			
	* 2.2662 *	* 2.2091 *	* 2.3724 *	* 2.6017 *	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 28 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 125 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2334	* 1.2685	* 1.4788	* 1.3093	* 1.5467	* 1.3563	* 1.5361	* 0.7972
	* 1.6601	* 1.6282	* 1.3787	* 1.5227	* 1.2726	* 1.4466	* 1.2645	* 2.1889
9	* 1.2685	* 1.5352	* 1.2846	* 1.5497	* 1.3433	* 1.4985	* 1.5651	* 0.8281
	* 1.6282	* 1.3465	* 1.5942	* 1.3047	* 1.4950	* 1.3074	* 1.2536	* 2.1253
10	* 1.4788	* 1.2833	* 1.4214	* 1.4424	* 1.5727	* 1.4783	* 1.5623	* 0.7753
	* 1.3787	* 1.5978	* 1.4437	* 1.4168	* 1.2908	* 1.3630	* 1.2750	* 2.2831
11	* 1.3093	* 1.5469	* 1.4390	* 1.5621	* 1.4772	* 1.6093	* 1.5509	* 0.7314
	* 1.5227	* 1.3053	* 1.4202	* 1.3065	* 1.3738	* 1.2522	* 1.2998	* 2.4937
12	* 1.5467	* 1.3419	* 1.5718	* 1.4762	* 1.4327	* 1.5350	* 0.9693	
	* 1.2726	* 1.4954	* 1.2916	* 1.3747	* 1.3934	* 1.2956	* 1.8640	
13	* 1.3563	* 1.4981	* 1.4776	* 1.6083	* 1.5341	* 1.0285	* 0.5631	
	* 1.4466	* 1.3078	* 1.3635	* 1.2530	* 1.2964	* 1.9147	* 3.2055	
14	* 1.5361	* 1.5646	* 1.5616	* 1.5499	* 0.9689	* 0.5513		
	* 1.2645	* 1.2539	* 1.2756	* 1.3006	* 1.8648	* 3.2426		
15	* 0.7972	* 0.8280	* 0.7748	* 0.7308	* F-SUB-Q			
	* 2.1889	* 2.1255	* 2.2843	* 2.4953	* M-SUB-Q			

AT 100% POWER, 125 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2647	* 1.3038	* 1.5337	* 1.3485	* 1.6060	* 1.3987	* 1.6031	* 0.8267
	* 1.6543	* 1.6165	* 1.3561	* 1.5104	* 1.2518	* 1.4282	* 1.2366	* 2.1562
9	* 1.3038	* 1.5857	* 1.3210	* 1.6069	* 1.3841	* 1.5534	* 1.6350	* 0.8601
	* 1.6165	* 1.3278	* 1.5814	* 1.2845	* 1.4839	* 1.2869	* 1.2248	* 2.0898
10	* 1.5337	* 1.3196	* 1.4601	* 1.4905	* 1.6382	* 1.5284	* 1.6333	* 0.8059
	* 1.3561	* 1.5848	* 1.4324	* 1.3972	* 1.2648	* 1.3402	* 1.2418	* 2.2397
11	* 1.3485	* 1.6038	* 1.4868	* 1.6226	* 1.5288	* 1.6827	* 1.6221	* 0.7607
	* 1.5104	* 1.2869	* 1.4008	* 1.2837	* 1.3561	* 1.2237	* 1.2676	* 2.4394
12	* 1.6060	* 1.3826	* 1.6371	* 1.5277	* 1.4815	* 1.6050	* 1.0131	
	* 1.2518	* 1.4843	* 1.2657	* 1.3570	* 1.3804	* 1.2695	* 1.8257	
13	* 1.3987	* 1.5529	* 1.5275	* 1.6816	* 1.6039	* 1.0711	* 0.5848	
	* 1.4282	* 1.2874	* 1.3409	* 1.2245	* 1.2703	* 1.8892	* 3.1714	
14	* 1.6031	* 1.6343	* 1.6325	* 1.6210	* 1.0126	* 0.5721		
	* 1.2366	* 1.2252	* 1.2425	* 1.2685	* 1.8265	* 3.2101		
15	* 0.8267	* 0.8600	* 0.8055	* 0.7601	* F-SUB-Q			
	* 2.1562	* 2.0901	* 2.2410	* 2.4412	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355

Appendix A, Rev. 0

Page 29 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 125 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2941 *	* 1.3363 *	* 1.5876 *	* 1.3850 *	* 1.6657 *	* 1.4399 *	* 1.6708 *	* 0.8453 *
	* 1.6495 *	* 1.6044 *	* 1.3390 *	* 1.5070 *	* 1.2372 *	* 1.4186 *	* 1.2158 *	* 2.1621 *
9	* 1.3363 *	* 1.6368 *	* 1.3548 *	* 1.6637 *	* 1.4220 *	* 1.6071 *	* 1.7052 *	* 0.8803 *
	* 1.6044 *	* 1.3084 *	* 1.5760 *	* 1.2681 *	* 1.4772 *	* 1.2740 *	* 1.2017 *	* 2.0930 *
10	* 1.5876 *	* 1.3532 *	* 1.4980 *	* 1.5366 *	* 1.7028 *	* 1.5770 *	* 1.7046 *	* 0.8244 *
	* 1.3390 *	* 1.5794 *	* 1.4236 *	* 1.3823 *	* 1.2381 *	* 1.3239 *	* 1.2149 *	* 2.2414 *
11	* 1.3850 *	* 1.6603 *	* 1.5327 *	* 1.6827 *	* 1.5785 *	* 1.7553 *	* 1.6910 *	* 0.7782 *
	* 1.5070 *	* 1.2705 *	* 1.3859 *	* 1.2600 *	* 1.3393 *	* 1.1953 *	* 1.2359 *	* 2.4274 *
12	* 1.6657 *	* 1.4205 *	* 1.7015 *	* 1.5774 *	* 1.5283 *	* 1.6725 *	* 1.0387 *	
	* 1.2372 *	* 1.4789 *	* 1.2390 *	* 1.3402 *	* 1.3717 *	* 1.2483 *	* 1.8195 *	
13	* 1.4399 *	* 1.6064 *	* 1.5760 *	* 1.7540 *	* 1.6713 *	* 1.1012 *	* 0.5963 *	
	* 1.4186 *	* 1.2745 *	* 1.3247 *	* 1.1961 *	* 1.2492 *	* 1.8845 *	* 3.1902 *	
14	* 1.6708 *	* 1.7044 *	* 1.7036 *	* 1.6898 *	* 1.0382 *	* 0.5826 *		
	* 1.2158 *	* 1.2023 *	* 1.2156 *	* 1.2368 *	* 1.8203 *	* 3.2338 *		
15	* 0.8453 *	* 0.8801 *	* 0.8238 *	* 0.7775 *	* F-SUB-Q			
	* 2.1621 *	* 2.0933 *	* 2.2429 *	* 2.4293 *	* M-SUB-Q			

AT 100% POWER, 125 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3116 *	* 1.3559 *	* 1.6208 *	* 1.4081 *	* 1.7043 *	* 1.4700 *	* 1.7167 *	* 0.8596 *
	* 1.6677 *	* 1.6213 *	* 1.3415 *	* 1.5240 *	* 1.2443 *	* 1.4296 *	* 1.2173 *	* 2.1882 *
9	* 1.3559 *	* 1.6678 *	* 1.3755 *	* 1.7001 *	* 1.4465 *	* 1.6439 *	* 1.7531 *	* 0.8961 *
	* 1.6213 *	* 1.3155 *	* 1.5883 *	* 1.2718 *	* 1.4898 *	* 1.2804 *	* 1.2001 *	* 2.1155 *
10	* 1.6208 *	* 1.3739 *	* 1.5214 *	* 1.5671 *	* 1.7471 *	* 1.6095 *	* 1.7530 *	* 0.8392 *
	* 1.3415 *	* 1.5919 *	* 1.4302 *	* 1.3832 *	* 1.2360 *	* 1.3263 *	* 1.2099 *	* 2.2607 *
11	* 1.4081 *	* 1.6965 *	* 1.5629 *	* 1.7220 *	* 1.6116 *	* 1.8048 *	* 1.7391 *	* 0.7920 *
	* 1.5240 *	* 1.2743 *	* 1.3870 *	* 1.2613 *	* 1.3428 *	* 1.1903 *	* 1.2309 *	* 2.4312 *
12	* 1.7043 *	* 1.4448 *	* 1.7457 *	* 1.6105 *	* 1.5593 *	* 1.7189 *	* 1.0601 *	
	* 1.2443 *	* 1.4915 *	* 1.2370 *	* 1.3437 *	* 1.3735 *	* 1.2408 *	* 1.8228 *	
13	* 1.4700 *	* 1.6431 *	* 1.6082 *	* 1.8034 *	* 1.7176 *	* 1.1235 *	* 0.6058 *	
	* 1.4296 *	* 1.2810 *	* 1.3272 *	* 1.1912 *	* 1.2417 *	* 1.8904 *	* 3.2054 *	
14	* 1.7167 *	* 1.7522 *	* 1.7520 *	* 1.7377 *	* 1.0596 *	* 0.5912 *		
	* 1.2173 *	* 1.2007 *	* 1.2107 *	* 1.2319 *	* 1.8235 *	* 3.2528 *		
15	* 0.8596 *	* 0.8959 *	* 0.8386 *	* 0.7913 *	* F-SUB-Q			
	* 2.1882 *	* 2.1158 *	* 2.2622 *	* 2.4332 *	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 30 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 125 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3272	* 1.3727	* 1.6518	* 1.4280	* 1.7412	* 1.4970	* 1.7600	* 0.8693
	* 1.7089	* 1.6441	* 1.3534	* 1.5516	* 1.2588	* 1.4512	* 1.2272	* 2.2365
9	* 1.3727	* 1.6972	* 1.3933	* 1.7342	* 1.4679	* 1.6777	* 1.7979	* 0.9046
	* 1.6441	* 1.3238	* 1.6123	* 1.2824	* 1.5119	* 1.2956	* 1.2067	* 2.1651
10	* 1.6518	* 1.3916	* 1.5429	* 1.5944	* 1.7883	* 1.6407	* 1.7984	* 0.8493
	* 1.3534	* 1.6150	* 1.4482	* 1.3966	* 1.2410	* 1.3376	* 1.2132	* 2.3043
11	* 1.4280	* 1.7304	* 1.5899	* 1.7586	* 1.6412	* 1.8511	* 1.7831	* 0.7997
	* 1.5516	* 1.2852	* 1.4005	* 1.2690	* 1.3604	* 1.1955	* 1.2297	* 2.4705
12	* 1.7412	* 1.4661	* 1.7867	* 1.6401	* 1.5873	* 1.7614	* 1.0740	*
	* 1.2588	* 1.5137	* 1.2420	* 1.3613	* 1.3969	* 1.2511	* 1.8576	*
13	* 1.4970	* 1.6768	* 1.6394	* 1.8496	* 1.7600	* 1.1402	* 0.6116	*
	* 1.4512	* 1.2963	* 1.3386	* 1.1965	* 1.2521	* 1.9250	* 3.2751	*
14	* 1.7600	* 1.7969	* 1.7971	* 1.7816	* 1.0735	* 0.5962	*	*
	* 1.2272	* 1.2074	* 1.2141	* 1.2307	* 1.8583	* 3.3273	*	*
15	* 0.8693	* 0.9044	* 0.8486	* 0.7989	* F-SUB-Q			
	* 2.2365	* 2.1655	* 2.3060	* 2.4728	* M-SUB-Q			

AT 100% POWER, 125 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3214	* 1.3679	* 1.6433	* 1.4253	* 1.7362	* 1.4994	* 1.7611	* 0.8812
	* 1.7658	* 1.7013	* 1.4077	* 1.6119	* 1.3109	* 1.5047	* 1.2735	* 2.2925
9	* 1.3679	* 1.6878	* 1.3892	* 1.7295	* 1.4660	* 1.6808	* 1.8001	* 0.9192
	* 1.7013	* 1.3747	* 1.6717	* 1.3302	* 1.5668	* 1.3419	* 1.2492	* 2.2113
10	* 1.6433	* 1.3875	* 1.5384	* 1.5936	* 1.7883	* 1.6435	* 1.8009	* 0.8623
	* 1.4077	* 1.6738	* 1.5015	* 1.4449	* 1.2789	* 1.3806	* 1.2529	* 2.3467
11	* 1.4253	* 1.7256	* 1.5890	* 1.7562	* 1.6420	* 1.8529	* 1.7879	* 0.8131
	* 1.6119	* 1.3332	* 1.4490	* 1.3096	* 1.3988	* 1.2300	* 1.2658	* 2.5097
12	* 1.7362	* 1.4642	* 1.7867	* 1.6408	* 1.5882	* 1.7651	* 1.0955	*
	* 1.3109	* 1.5686	* 1.2800	* 1.3998	* 1.4446	* 1.2904	* 1.8756	*
13	* 1.4994	* 1.6798	* 1.6420	* 1.8513	* 1.7636	* 1.1533	* 0.6217	*
	* 1.5047	* 1.3427	* 1.3818	* 1.2311	* 1.2915	* 1.9756	* 3.3330	*
14	* 1.7611	* 1.7989	* 1.7995	* 1.7862	* 1.0947	* 0.6061	*	*
	* 1.2735	* 1.2500	* 1.2538	* 1.2669	* 1.8768	* 3.3854	*	*
15	* 0.8812	* 0.9190	* 0.8616	* 0.8122	* F-SUB-Q			
	* 2.2925	* 2.2118	* 2.3485	* 2.5121	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 31 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 125 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3363	* 1.3836	* 1.6776	* 1.4437	* 1.7770	* 1.5263	* 1.8094	* 0.8812 *
	* 1.8123	* 1.7479	* 1.4328	* 1.6584	* 1.3360	* 1.5421	* 1.2930	* 2.3875 *
9	* 1.3836	* 1.7213	* 1.4058	* 1.7668	* 1.4861	* 1.7159	* 1.8505	* 0.9191 *
	* 1.7479	* 1.4014	* 1.7177	* 1.3534	* 1.6080	* 1.3704	* 1.2658	* 2.3048 *
10	* 1.6776	* 1.4040	* 1.5598	* 1.6208	* 1.8338	* 1.6762	* 1.8518	* 0.8626 *
	* 1.4328	* 1.7202	* 1.5399	* 1.4773	* 1.2958	* 1.4076	* 1.2670	* 2.4410 *
11	* 1.4437	* 1.7627	* 1.6159	* 1.7962	* 1.6718	* 1.9045	* 1.8362	* 0.8126 *
	* 1.6584	* 1.3565	* 1.4817	* 1.3299	* 1.4264	* 1.2434	* 1.2795	* 2.6069 *
12	* 1.7770	* 1.4842	* 1.8320	* 1.6706	* 1.6162	* 1.8112	* 1.0956 *	
	* 1.3360	* 1.6099	* 1.2970	* 1.4274	* 1.4707	* 1.3034	* 1.9445 *	
13	* 1.5263	* 1.7148	* 1.6745	* 1.9028	* 1.8096	* 1.1614	* 0.6193 *	
	* 1.5421	* 1.3712	* 1.4089	* 1.2445	* 1.3045	* 2.0282	* 3.4561 *	
14	* 1.8094	* 1.8492	* 1.8503	* 1.8343	* 1.0950	* 0.6027 *		
	* 1.2930	* 1.2666	* 1.2680	* 1.2807	* 1.9454	* 3.5167 *		
15	* 0.8812	* 0.9189	* 0.8617	* 0.8116	* F-SUB-Q			
	* 2.3875	* 2.3053	* 2.4433	* 2.6095	* M-SUB-Q			

AT 100% POWER, 125 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3361	* 1.3839	* 1.6836	* 1.4461	* 1.7882	* 1.5355	* 1.8273	* 0.8839 *
	* 1.8544	* 1.7866	* 1.4669	* 1.7058	* 1.3820	* 1.6044	* 1.3397	* 2.4887 *
9	* 1.3839	* 1.7268	* 1.4067	* 1.7762	* 1.4894	* 1.7288	* 1.8698	* 0.9231 *
	* 1.7866	* 1.4323	* 1.7561	* 1.3953	* 1.6620	* 1.4231	* 1.3098	* 2.3991 *
10	* 1.6836	* 1.4049	* 1.5623	* 1.6277	* 1.8494	* 1.6877	* 1.8717	* 0.8660 *
	* 1.4669	* 1.7584	* 1.5865	* 1.5244	* 1.3418	* 1.4600	* 1.3094	* 2.5378 *
11	* 1.4461	* 1.7719	* 1.6227	* 1.8080	* 1.6805	* 1.9243	* 1.8564	* 0.8161 *
	* 1.7058	* 1.3986	* 1.5291	* 1.3778	* 1.4811	* 1.2856	* 1.3209	* 2.7042 *
12	* 1.7882	* 1.4874	* 1.8476	* 1.6793	* 1.6246	* 1.8295	* 1.1022 *	
	* 1.3820	* 1.6641	* 1.3430	* 1.4820	* 1.5258	* 1.3462	* 2.0160 *	
13	* 1.5355	* 1.7276	* 1.6859	* 1.9224	* 1.8278	* 1.1675	* 0.6209 *	
	* 1.6044	* 1.4240	* 1.4615	* 1.2868	* 1.3474	* 2.1013	* 3.5862 *	
14	* 1.8273	* 1.8684	* 1.8699	* 1.8544	* 1.1015	* 0.6037 *		
	* 1.3397	* 1.3107	* 1.3105	* 1.3222	* 2.0169	* 3.6525 *		
15	* 0.8839	* 0.9228	* 0.8651	* 0.8151	* F-SUB-Q			
	* 2.4887	* 2.3997	* 2.5402	* 2.7069	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 32 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 125 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3220	* 1.3700	* 1.6638	* 1.4342	* 1.7722	* 1.5288	* 1.8182	* 0.8887
	* 1.8318	* 1.7605	* 1.4482	* 1.6782	* 1.3607	* 1.5774	* 1.3278	* 2.4458
9	* 1.3700	* 1.7072	* 1.3933	* 1.7605	* 1.4777	* 1.7219	* 1.8616	* 0.9286
	* 1.7605	* 1.4137	* 1.7297	* 1.3742	* 1.6350	* 1.4042	* 1.3011	* 2.3554
10	* 1.6638	* 1.3914	* 1.5481	* 1.6165	* 1.8386	* 1.6806	* 1.8638	* 0.8710
	* 1.4482	* 1.7319	* 1.5630	* 1.4986	* 1.3266	* 1.4446	* 1.3028	* 2.4986
11	* 1.4342	* 1.7560	* 1.6113	* 1.7945	* 1.6705	* 1.9149	* 1.8507	* 0.8210
	* 1.6782	* 1.3776	* 1.5033	* 1.3566	* 1.4615	* 1.2771	* 1.3190	* 2.6718
12	* 1.7722	* 1.4756	* 1.8366	* 1.6693	* 1.6159	* 1.8226	* 1.1136	*
	* 1.3607	* 1.6371	* 1.3279	* 1.4625	* 1.5213	* 1.3471	* 1.9839	*
13	* 1.5288	* 1.7207	* 1.6786	* 1.9129	* 1.8209	* 1.1711	* 0.6251	*
	* 1.5774	* 1.4052	* 1.4463	* 1.2784	* 1.3483	* 2.0941	* 3.5723	*
14	* 1.8182	* 1.8601	* 1.8619	* 1.8486	* 1.1127	* 0.6079	*	*
	* 1.3278	* 1.3021	* 1.3041	* 1.3204	* 1.9853	* 3.6373	*	*
15	* 0.8887	* 0.9284	* 0.8701	* 0.8199	* F-SUB-Q			
	* 2.4458	* 2.3562	* 2.5009	* 2.6750	* M-SUB-Q			

AT 100% POWER, 125 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3252	* 1.3733	* 1.6810	* 1.4389	* 1.7960	* 1.5433	* 1.8513	* 0.8809
	* 1.7825	* 1.7106	* 1.3978	* 1.6319	* 1.3127	* 1.5281	* 1.2756	* 2.4036
9	* 1.3733	* 1.7246	* 1.3973	* 1.7813	* 1.4839	* 1.7431	* 1.8968	* 0.9206
	* 1.7106	* 1.3644	* 1.6803	* 1.3274	* 1.5906	* 1.3572	* 1.2493	* 2.3163
10	* 1.6810	* 1.3954	* 1.5554	* 1.6292	* 1.8677	* 1.6994	* 1.8997	* 0.8649
	* 1.3978	* 1.6825	* 1.5193	* 1.4535	* 1.2766	* 1.3974	* 1.2500	* 2.4557
11	* 1.4389	* 1.7766	* 1.6238	* 1.8182	* 1.6853	* 1.9502	* 1.8859	* 0.8136
	* 1.6319	* 1.3307	* 1.4582	* 1.3093	* 1.4163	* 1.2254	* 1.2643	* 2.6285
12	* 1.7960	* 1.4818	* 1.8656	* 1.6841	* 1.6302	* 1.8537	* 1.1049	*
	* 1.3127	* 1.5926	* 1.2780	* 1.4173	* 1.4735	* 1.2933	* 1.9526	*
13	* 1.5433	* 1.7417	* 1.6971	* 1.9481	* 1.8519	* 1.1698	* 0.6175	*
	* 1.5281	* 1.3582	* 1.3992	* 1.2267	* 1.2946	* 2.0466	* 3.5197	*
14	* 1.8513	* 1.8952	* 1.8976	* 1.8836	* 1.1042	* 0.5994	*	*
	* 1.2756	* 1.2504	* 1.2513	* 1.2658	* 1.9537	* 3.5900	*	*
15	* 0.8809	* 0.9203	* 0.8639	* 0.8124	* F-SUB-Q			
	* 2.4036	* 2.3170	* 2.4585	* 2.6318	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 33 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 125 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3163	* 1.3647	* 1.6758	* 1.4316	* 1.7959	* 1.5435	* 1.8602	* 0.8752 *
	* 1.7221	* 1.6518	* 1.3454	* 1.5743	* 1.2601	* 1.4675	* 1.2199	* 2.3223 *
9	* 1.3647	* 1.7201	* 1.3890	* 1.7799	* 1.4771	* 1.7462	* 1.9068	* 0.9144 *
	* 1.6518	* 1.3126	* 1.6221	* 1.2749	* 1.5336	* 1.3018	* 1.1943	* 2.2385 *
10	* 1.6758	* 1.3871	* 1.5477	* 1.6257	* 1.8729	* 1.7012	* 1.9101	* 0.8603 *
	* 1.3454	* 1.6243	* 1.4651	* 1.3981	* 1.2241	* 1.3418	* 1.1953	* 2.3685 *
11	* 1.4316	* 1.7751	* 1.6201	* 1.8193	* 1.6834	* 1.9594	* 1.8974	* 0.8074 *
	* 1.5743	* 1.2781	* 1.4027	* 1.2567	* 1.3634	* 1.1744	* 1.2088	* 2.5396 *
12	* 1.7959	* 1.4750	* 1.8707	* 1.6821	* 1.6288	* 1.8622	* 1.1004	*
	* 1.2601	* 1.5357	* 1.2255	* 1.3644	* 1.4217	* 1.2399	* 1.8809	*
13	* 1.5435	* 1.7447	* 1.6988	* 1.9571	* 1.8604	* 1.1662	* 0.6122	*
	* 1.4675	* 1.3029	* 1.3436	* 1.1757	* 1.2411	* 1.9720	* 3.4007	*
14	* 1.8602	* 1.9050	* 1.9079	* 1.8950	* 1.0997	* 0.5937	*	*
	* 1.2199	* 1.1954	* 1.1965	* 1.2102	* 1.8819	* 3.4723	*	*
15	* 0.8752	* 0.9140	* 0.8592	* 0.8063	* F-SUB-Q			
	* 2.3223	* 2.2393	* 2.3714	* 2.5430	* M-SUB-Q			

AT 100% POWER, 125 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3001	* 1.3475	* 1.6567	* 1.4151	* 1.7810	* 1.5330	* 1.8518	* 0.8688 *
	* 1.6782	* 1.6104	* 1.3101	* 1.5336	* 1.2230	* 1.4222	* 1.1792	* 2.2529 *
9	* 1.3475	* 1.7019	* 1.3721	* 1.7640	* 1.4613	* 1.7367	* 1.8990	* 0.9096 *
	* 1.6104	* 1.2770	* 1.5809	* 1.2381	* 1.4922	* 1.2596	* 1.1534	* 2.1666 *
10	* 1.6567	* 1.3702	* 1.5315	* 1.6110	* 1.8617	* 1.6909	* 1.9027	* 0.8549 *
	* 1.3101	* 1.5831	* 1.4255	* 1.3578	* 1.1841	* 1.2985	* 1.1537	* 2.2938 *
11	* 1.4151	* 1.7592	* 1.6053	* 1.8053	* 1.6698	* 1.9503	* 1.8908	* 0.8042 *
	* 1.5336	* 1.2414	* 1.3624	* 1.2182	* 1.3218	* 1.1336	* 1.1654	* 2.4528 *
12	* 1.7810	* 1.4592	* 1.8594	* 1.6686	* 1.6166	* 1.8541	* 1.0963	*
	* 1.2230	* 1.4943	* 1.1854	* 1.3227	* 1.3769	* 1.1959	* 1.8141	*
13	* 1.5330	* 1.7352	* 1.6883	* 1.9479	* 1.8522	* 1.1594	* 0.6078	*
	* 1.4222	* 1.2607	* 1.3004	* 1.1349	* 1.1971	* 1.9053	* 3.2921	*
14	* 1.8518	* 1.8971	* 1.9003	* 1.8883	* 1.0954	* 0.5893	*	*
	* 1.1792	* 1.1545	* 1.1551	* 1.1669	* 1.8152	* 3.3624	*	*
15	* 0.8688	* 0.9093	* 0.8537	* 0.8030	* F-SUB-Q			
	* 2.2529	* 2.1674	* 2.2967	* 2.4563	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 34 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 125 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2736	* 1.3200	* 1.6182	* 1.3886	* 1.7449	* 1.5094	* 1.8203	* 0.8638
	* 1.7848	* 1.7141	* 1.3987	* 1.6304	* 1.3015	* 1.5061	* 1.2501	* 2.3649
9	* 1.3200	* 1.6648	* 1.3445	* 1.7286	* 1.4348	* 1.7108	* 1.8679	* 0.9047
	* 1.7141	* 1.3611	* 1.6825	* 1.3173	* 1.5852	* 1.3328	* 1.2215	* 2.2725
10	* 1.6182	* 1.3426	* 1.5026	* 1.5820	* 1.8286	* 1.6651	* 1.8717	* 0.8487
	* 1.3987	* 1.6848	* 1.5150	* 1.4413	* 1.2550	* 1.3739	* 1.2214	* 2.4076
11	* 1.3886	* 1.7237	* 1.5763	* 1.7709	* 1.6411	* 1.9172	* 1.8615	* 0.7994
	* 1.6304	* 1.3209	* 1.4463	* 1.2937	* 1.4004	* 1.1996	* 1.2317	* 2.5712
12	* 1.7449	* 1.4325	* 1.8262	* 1.6399	* 1.5899	* 1.8249	* 1.0934	*
	* 1.3015	* 1.5876	* 1.2566	* 1.4014	* 1.4561	* 1.2631	* 1.8924	*
13	* 1.5094	* 1.7092	* 1.6624	* 1.9148	* 1.8229	* 1.1490	* 0.6042	*
	* 1.5061	* 1.3340	* 1.3760	* 1.2011	* 1.2644	* 1.9991	* 3.4476	*
14	* 1.8203	* 1.8659	* 1.8692	* 1.8589	* 1.0924	* 0.5860	*	*
	* 1.2501	* 1.2228	* 1.2229	* 1.2333	* 1.8938	* 3.5201	*	*
15	* 0.8638	* 0.9043	* 0.8477	* 0.7982	* F-SUB-Q			
	* 2.3649	* 2.2734	* 2.4103	* 2.5749	* M-SUB-Q			

AT 100% POWER, 125 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2615	* 1.3066	* 1.6130	* 1.3744	* 1.7451	* 1.5031	* 1.8278	* 0.8418
	* 1.7302	* 1.6675	* 1.3522	* 1.5895	* 1.2555	* 1.4604	* 1.2012	* 2.3443
9	* 1.3066	* 1.6615	* 1.3312	* 1.7264	* 1.4211	* 1.7089	* 1.8762	* 0.8812
	* 1.6675	* 1.3134	* 1.6375	* 1.2712	* 1.5433	* 1.2874	* 1.1721	* 2.2542
10	* 1.6130	* 1.3293	* 1.4911	* 1.5735	* 1.8320	* 1.6610	* 1.8803	* 0.8296
	* 1.3522	* 1.6398	* 1.4712	* 1.3963	* 1.2050	* 1.3274	* 1.1709	* 2.3782
11	* 1.3744	* 1.7213	* 1.5676	* 1.7706	* 1.6332	* 1.9244	* 1.8700	* 0.7777
	* 1.5895	* 1.2747	* 1.4013	* 1.2450	* 1.3531	* 1.1484	* 1.1788	* 2.5487
12	* 1.7451	* 1.4190	* 1.8295	* 1.6320	* 1.5824	* 1.8292	* 1.0661	*
	* 1.2555	* 1.5455	* 1.2065	* 1.3541	* 1.4021	* 1.2089	* 1.8653	*
13	* 1.5031	* 1.7072	* 1.6582	* 1.9218	* 1.8271	* 1.1292	* 0.5866	*
	* 1.4604	* 1.2887	* 1.3296	* 1.1499	* 1.2102	* 1.9512	* 3.4185	*
14	* 1.8278	* 1.8742	* 1.8778	* 1.8673	* 1.0653	* 0.5678	*	*
	* 1.2012	* 1.1734	* 1.1724	* 1.1804	* 1.8664	* 3.4971	*	*
15	* 0.8418	* 0.8808	* 0.8284	* 0.7765	* F-SUB-Q			
	* 2.3443	* 2.2551	* 2.3814	* 2.5526	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 35 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 125 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2319	* 1.2746	* 1.5723	* 1.3411	* 1.7067	* 1.4729	* 1.7919	* 0.8208
	* 1.7015	* 1.6452	* 1.3353	* 1.5688	* 1.2355	* 1.4346	* 1.1787	* 2.3164
9	* 1.2746	* 1.6240	* 1.2989	* 1.6885	* 1.3882	* 1.6773	* 1.8407	* 0.8596
	* 1.6452	* 1.2933	* 1.6158	* 1.2510	* 1.5211	* 1.2621	* 1.1489	* 2.2261
10	* 1.5723	* 1.2970	* 1.4584	* 1.5395	* 1.7943	* 1.6290	* 1.8444	* 0.8093
	* 1.3353	* 1.6182	* 1.4479	* 1.3733	* 1.1825	* 1.3018	* 1.1476	* 2.3472
11	* 1.3411	* 1.6835	* 1.5337	* 1.7332	* 1.5987	* 1.8863	* 1.8342	* 0.7583
	* 1.5688	* 1.2546	* 1.3784	* 1.2233	* 1.3288	* 1.1252	* 1.1545	* 2.5164
12	* 1.7067	* 1.3861	* 1.7919	* 1.5975	* 1.5495	* 1.7927	* 1.0411	*
	* 1.2355	* 1.5233	* 1.1841	* 1.3298	* 1.3728	* 1.1836	* 1.8355	*
13	* 1.4729	* 1.6755	* 1.6261	* 1.8837	* 1.7907	* 1.1028	* 0.5710	*
	* 1.4346	* 1.2633	* 1.3040	* 1.1267	* 1.1849	* 1.9177	* 3.3781	*
14	* 1.7919	* 1.8386	* 1.8419	* 1.8315	* 1.0403	* 0.5525	*	*
	* 1.1787	* 1.1502	* 1.1491	* 1.1561	* 1.8367	* 3.4574	*	*
15	* 0.8208	* 0.8592	* 0.8082	* 0.7570	* F-SUB-Q			
	* 2.3164	* 2.2271	* 2.3505	* 2.5204	* M-SUB-Q			

AT 100% POWER, 125 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1813	* 1.2203	* 1.4889	* 1.2850	* 1.6211	* 1.4131	* 1.7024	* 0.7989
	* 1.7168	* 1.6633	* 1.3651	* 1.5853	* 1.2588	* 1.4470	* 1.1997	* 2.3059
9	* 1.2203	* 1.5449	* 1.2440	* 1.6069	* 1.3317	* 1.6084	* 1.7501	* 0.8373
	* 1.6633	* 1.3160	* 1.6333	* 1.2722	* 1.5348	* 1.2732	* 1.1685	* 2.2141
10	* 1.4889	* 1.2422	* 1.4006	* 1.4746	* 1.7058	* 1.5622	* 1.7530	* 0.7859
	* 1.3651	* 1.6357	* 1.4593	* 1.3873	* 1.2026	* 1.3128	* 1.1673	* 2.3410
11	* 1.2850	* 1.6021	* 1.4690	* 1.6501	* 1.5316	* 1.7919	* 1.7428	* 0.7388
	* 1.5853	* 1.2759	* 1.3925	* 1.2427	* 1.3409	* 1.1441	* 1.1741	* 2.5009
12	* 1.6211	* 1.3295	* 1.7034	* 1.5304	* 1.4859	* 1.7048	* 1.0155	*
	* 1.2588	* 1.5372	* 1.2042	* 1.3419	* 1.3829	* 1.2019	* 1.8194	*
13	* 1.4131	* 1.6067	* 1.5594	* 1.7895	* 1.7028	* 1.0659	* 0.5562	*
	* 1.4470	* 1.2745	* 1.3150	* 1.1457	* 1.2033	* 1.9173	* 3.3572	*
14	* 1.7024	* 1.7481	* 1.7505	* 1.7403	* 1.0144	* 0.5389	*	*
	* 1.1997	* 1.1698	* 1.1689	* 1.1758	* 1.8211	* 3.4310	*	*
15	* 0.7989	* 0.8369	* 0.7849	* 0.7375	* F-SUB-Q			
	* 2.3059	* 2.2151	* 2.3439	* 2.5049	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 36 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 125 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1369 *	* 1.1720 *	* 1.4247 *	* 1.2332 *	* 1.5525 *	* 1.3577 *	* 1.6281 *	* 0.7528 *
	* 1.7371 *	* 1.6865 *	* 1.3891 *	* 1.6085 *	* 1.2795 *	* 1.4659 *	* 1.2206 *	* 2.3845 *
9	* 1.1720 *	* 1.4838 *	* 1.1955 *	* 1.5423 *	* 1.2795 *	* 1.5469 *	* 1.6744 *	* 0.7883 *
	* 1.6865 *	* 1.3342 *	* 1.6552 *	* 1.2903 *	* 1.5552 *	* 1.2881 *	* 1.1880 *	* 2.2916 *
10	* 1.4247 *	* 1.1937 *	* 1.3508 *	* 1.4192 *	* 1.6340 *	* 1.5023 *	* 1.6765 *	* 0.7413 *
	* 1.3891 *	* 1.6576 *	* 1.4729 *	* 1.4027 *	* 1.2214 *	* 1.3280 *	* 1.1872 *	* 2.4176 *
11	* 1.2332 *	* 1.5377 *	* 1.4138 *	* 1.5834 *	* 1.4728 *	* 1.7137 *	* 1.6638 *	* 0.6942 *
	* 1.6085 *	* 1.2940 *	* 1.4080 *	* 1.2601 *	* 1.3564 *	* 1.1630 *	* 1.1957 *	* 2.5928 *
12	* 1.5525 *	* 1.2776 *	* 1.6318 *	* 1.4718 *	* 1.4289 *	* 1.6268 *	* 0.9534 *	
	* 1.2795 *	* 1.5574 *	* 1.2230 *	* 1.3574 *	* 1.3985 *	* 1.2243 *	* 1.8856 *	
13	* 1.3577 *	* 1.5453 *	* 1.4996 *	* 1.7113 *	* 1.6249 *	* 1.0073 *	* 0.5227 *	
	* 1.4659 *	* 1.2894 *	* 1.3303 *	* 1.1646 *	* 1.2257 *	* 1.9738 *	* 3.4797 *	
14	* 1.6281 *	* 1.6724 *	* 1.6741 *	* 1.6613 *	* 0.9524 *	* 0.5058 *		
	* 1.2206 *	* 1.1893 *	* 1.1888 *	* 1.1974 *	* 1.8873 *	* 3.5611 *		
15	* 0.7528 *	* 0.7879 *	* 0.7403 *	* 0.6930 *	* F-SUB-Q			
	* 2.3845 *	* 2.2926 *	* 2.4211 *	* 2.5970 *	* M-SUB-Q			

AT 100% POWER, 125 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0426 *	* 1.0837 *	* 1.3041 *	* 1.1418 *	* 1.4054 *	* 1.2446 *	* 1.4675 *	* 0.6947 *
	* 1.8559 *	* 1.7867 *	* 1.4862 *	* 1.7014 *	* 1.3839 *	* 1.5656 *	* 1.3259 *	* 2.5332 *
9	* 1.0837 *	* 1.3513 *	* 1.1060 *	* 1.4095 *	* 1.1858 *	* 1.4108 *	* 1.5068 *	* 0.7257 *
	* 1.7867 *	* 1.4349 *	* 1.7525 *	* 1.3823 *	* 1.6430 *	* 1.3824 *	* 1.2922 *	* 2.4404 *
10	* 1.3041 *	* 1.1044 *	* 1.2441 *	* 1.3114 *	* 1.4812 *	* 1.3729 *	* 1.5066 *	* 0.6816 *
	* 1.4862 *	* 1.7549 *	* 1.5659 *	* 1.4859 *	* 1.3186 *	* 1.4220 *	* 1.2928 *	* 2.5778 *
11	* 1.1418 *	* 1.4054 *	* 1.3065 *	* 1.4454 *	* 1.3573 *	* 1.5420 *	* 1.4981 *	* 0.6346 *
	* 1.7014 *	* 1.3862 *	* 1.4914 *	* 1.3510 *	* 1.4401 *	* 1.2643 *	* 1.2994 *	* 2.7811 *
12	* 1.4054 *	* 1.1842 *	* 1.4792 *	* 1.3563 *	* 1.3070 *	* 1.4670 *	* 0.8768 *	
	* 1.3839 *	* 1.6452 *	* 1.3203 *	* 1.4410 *	* 1.4963 *	* 1.3285 *	* 2.0083 *	
13	* 1.2446 *	* 1.4094 *	* 1.3705 *	* 1.5400 *	* 1.4653 *	* 0.9180 *	* 0.4805 *	
	* 1.5656 *	* 1.3837 *	* 1.4245 *	* 1.2658 *	* 1.3299 *	* 2.1212 *	* 3.7131 *	
14	* 1.4675 *	* 1.5050 *	* 1.5045 *	* 1.4960 *	* 0.8755 *	* 0.4646 *		
	* 1.3259 *	* 1.2937 *	* 1.2946 *	* 1.3013 *	* 2.0111 *	* 3.8025 *		
15	* 0.6947 *	* 0.7254 *	* 0.6807 *	* 0.6335 *	* F-SUB-Q			
	* 2.5332 *	* 2.4414 *	* 2.5814 *	* 2.7855 *	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 37 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 125 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.8381	* 0.8965	* 1.1820	* 0.9440	* 1.2302	* 1.0025	* 1.2620	* 0.5806
	* 2.2756	* 2.1280	* 1.6148	* 2.0270	* 1.5560	* 1.9141	* 1.5186	* 2.9898
9	* 0.8965	* 1.1731	* 0.9170	* 1.2230	* 0.9835	* 1.1324	* 1.2846	* 0.6045
	* 2.1280	* 1.6263	* 2.0839	* 1.5660	* 1.9499	* 1.6951	* 1.4926	* 2.8899
10	* 1.1820	* 0.9151	* 1.0092	* 1.0864	* 1.2786	* 1.1068	* 1.2768	* 0.5609
	* 1.6148	* 2.0881	* 1.9010	* 1.7660	* 1.5019	* 1.7368	* 1.5021	* 3.0901
11	* 0.9440	* 1.2193	* 1.0827	* 1.2652	* 1.1170	* 1.3079	* 1.2307	* 0.5195
	* 2.0270	* 1.5707	* 1.7720	* 1.5187	* 1.7218	* 1.4676	* 1.5572	* 3.3516
12	* 1.2302	* 0.9822	* 1.2768	* 1.1162	* 1.0302	* 1.2368	* 0.7308	*
	* 1.5560	* 1.9525	* 1.5041	* 1.7229	* 1.8682	* 1.5514	* 2.3751	*
13	* 1.0025	* 1.1313	* 1.1050	* 1.3064	* 1.2356	* 0.7439	* 0.3970	*
	* 1.9141	* 1.6967	* 1.7396	* 1.4693	* 1.5529	* 2.5798	* 4.4355	*
14	* 1.2620	* 1.2834	* 1.2753	* 1.2290	* 0.7292	* 0.3842	*	*
	* 1.5186	* 1.4940	* 1.5038	* 1.5593	* 2.3800	* 4.5385	*	*
15	* 0.5806	* 0.6043	* 0.5601	* 0.5186	* F-SUB-Q			
	* 2.9898	* 2.8910	* 3.0942	* 3.3566	* M-SUB-Q			

AT 100% POWER, 125 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.3637	* 0.3931	* 0.4764	* 0.4160	* 0.4946	* 0.4164	* 0.4672	* 0.2456
	* 5.1987	* 4.8100	* 3.9705	* 4.5581	* 3.8349	* 4.5641	* 4.0661	* 7.0138
9	* 0.3931	* 0.4604	* 0.4043	* 0.4957	* 0.4343	* 0.4442	* 0.4731	* 0.2527
	* 4.8100	* 4.1072	* 4.6855	* 3.8287	* 4.3741	* 4.2793	* 4.0170	* 6.8595
10	* 0.4764	* 0.4034	* 0.4113	* 0.4582	* 0.5147	* 0.4466	* 0.4692	* 0.2383
	* 3.9705	* 4.6956	* 4.6196	* 4.1469	* 3.6946	* 4.2595	* 4.0505	* 7.2177
11	* 0.4160	* 0.4943	* 0.4568	* 0.5107	* 0.4549	* 0.5099	* 0.4475	* 0.2158
	* 4.5581	* 3.8391	* 4.1588	* 3.7248	* 4.1835	* 3.7298	* 4.2473	* 8.0085
12	* 0.4946	* 0.4336	* 0.5139	* 0.4545	* 0.4076	* 0.4562	* 0.3073	*
	* 3.8349	* 4.3804	* 3.7001	* 4.1865	* 4.6726	* 4.1703	* 5.6029	*
13	* 0.4164	* 0.4438	* 0.4459	* 0.5093	* 0.4558	* 0.3206	* 0.1686	*
	* 4.5641	* 4.2829	* 4.2658	* 3.7340	* 4.1742	* 5.9372	* 10.3689	*
14	* 0.4672	* 0.4726	* 0.4687	* 0.4469	* 0.3067	* 0.1658	*	*
	* 4.0661	* 4.0208	* 4.0553	* 4.2532	* 5.6146	* 10.4399	*	*
15	* 0.2456	* 0.2526	* 0.2381	* 0.2155	* F-SUB-Q			
	* 7.0138	* 6.8620	* 7.2252	* 8.0201	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 38 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 250 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.3915	* 0.4436	* 0.5205	* 0.4662	* 0.5255	* 0.4467	* 0.4688	* 0.2689
	* 4.2423	* 4.2477	* 3.6663	* 3.9342	* 3.5485	* 4.0527	* 3.9203	* 6.0760
9	* 0.4436	* 0.5024	* 0.4579	* 0.5310	* 0.4789	* 0.4588	* 0.4719	* 0.2765
	* 4.2477	* 3.8384	* 4.0868	* 3.5703	* 3.8670	* 3.9768	* 3.9141	* 5.9614
10	* 0.5205	* 0.4574	* 0.4642	* 0.4965	* 0.5333	* 0.4675	* 0.4671	* 0.2585
	* 3.6663	* 4.0931	* 4.0545	* 3.8112	* 3.6080	* 3.9866	* 4.0446	* 6.3920
11	* 0.4662	* 0.5303	* 0.4957	* 0.5292	* 0.4760	* 0.5046	* 0.4443	* 0.2372
	* 3.9342	* 3.5738	* 3.8172	* 3.6052	* 3.8565	* 3.7430	* 4.2934	* 7.2479
12	* 0.5255	* 0.4785	* 0.5328	* 0.4758	* 0.4029	* 0.4403	* 0.3196	*
	* 3.5485	* 3.8705	* 3.6114	* 3.8585	* 4.1598	* 4.0423	* 5.2306	*
13	* 0.4467	* 0.4585	* 0.4673	* 0.5043	* 0.4401	* 0.3228	* 0.1927	*
	* 4.0527	* 3.9779	* 3.9887	* 3.7446	* 4.0442	* 5.3415	* 8.5586	*
14	* 0.4688	* 0.4718	* 0.4670	* 0.4441	* 0.3193	* 0.1877	*	*
	* 3.9203	* 3.9148	* 4.0461	* 4.2957	* 5.2359	* 8.7044	*	*
15	* 0.2689	* 0.2765	* 0.2584	* 0.2371	* F-SUB-Q			
	* 6.0760	* 5.9619	* 6.3942	* 7.2522	* M-SUB-Q			

AT 100% POWER, 250 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.8508	* 0.9201	* 1.1278	* 0.9569	* 1.1400	* 0.9481	* 1.0940	* 0.5944
	* 2.1843	* 2.0906	* 1.7286	* 1.9596	* 1.6722	* 1.9549	* 1.7188	* 2.8139
9	* 0.9201	* 1.1191	* 0.9415	* 1.1501	* 0.9799	* 1.0223	* 1.1023	* 0.6106
	* 2.0906	* 1.7538	* 2.0318	* 1.6817	* 1.9327	* 1.8177	* 1.7149	* 2.7635
10	* 1.1278	* 0.9405	* 1.0120	* 1.0437	* 1.1578	* 1.0303	* 1.0939	* 0.5680
	* 1.7286	* 2.0351	* 1.9019	* 1.8545	* 1.6912	* 1.8456	* 1.7641	* 2.9762
11	* 0.9569	* 1.1485	* 1.0420	* 1.1521	* 1.0484	* 1.1230	* 1.0527	* 0.5316
	* 1.9596	* 1.6834	* 1.8575	* 1.6836	* 1.7907	* 1.7152	* 1.8382	* 3.3055
12	* 1.1400	* 0.9793	* 1.1570	* 1.0480	* 0.9415	* 1.0617	* 0.7016	*
	* 1.6722	* 1.9337	* 1.6922	* 1.7915	* 1.8940	* 1.7573	* 2.4328	*
13	* 0.9481	* 1.0220	* 1.0298	* 1.1225	* 1.0612	* 0.7056	* 0.4289	*
	* 1.9549	* 1.8181	* 1.8464	* 1.7158	* 1.7581	* 2.5816	* 3.9426	*
14	* 1.0940	* 1.1021	* 1.0936	* 1.0522	* 0.7008	* 0.4172	*	*
	* 1.7188	* 1.7152	* 1.7646	* 1.8391	* 2.4354	* 4.0137	*	*
15	* 0.5944	* 0.6106	* 0.5678	* 0.5313	* F-SUB-Q			
	* 2.8139	* 2.7636	* 2.9772	* 3.3072	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 39 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 250 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0614	* 1.1147	* 1.3314	* 1.1564	* 1.3518	* 1.1523	* 1.3037	* 0.7235
	* 1.8548	* 1.7598	* 1.4873	* 1.6470	* 1.4316	* 1.6332	* 1.4622	* 2.3469
9	* 1.1147	* 1.3149	* 1.1347	* 1.3424	* 1.1779	* 1.2510	* 1.3186	* 0.7479
	* 1.7598	* 1.5198	* 1.7132	* 1.4632	* 1.6339	* 1.5071	* 1.4565	* 2.2898
10	* 1.3314	* 1.1333	* 1.2257	* 1.2548	* 1.3432	* 1.2520	* 1.3132	* 0.7000
	* 1.4873	* 1.7163	* 1.5948	* 1.5667	* 1.4754	* 1.5413	* 1.4910	* 2.4504
11	* 1.1564	* 1.3407	* 1.2526	* 1.3402	* 1.2719	* 1.3586	* 1.2760	* 0.6564
	* 1.6470	* 1.4638	* 1.5693	* 1.4723	* 1.5043	* 1.4426	* 1.5379	* 2.7153
12	* 1.3518	* 1.1771	* 1.3415	* 1.2713	* 1.2083	* 1.2879	* 0.8602	*
	* 1.4316	* 1.6353	* 1.4773	* 1.5052	* 1.5583	* 1.4914	* 2.0204	*
13	* 1.1523	* 1.2507	* 1.2514	* 1.3580	* 1.2873	* 0.8945	* 0.5255	*
	* 1.6332	* 1.5073	* 1.5419	* 1.4432	* 1.4921	* 2.1129	* 3.2878	*
14	* 1.3037	* 1.3183	* 1.3128	* 1.2753	* 0.8597	* 0.5146	*	*
	* 1.4622	* 1.4567	* 1.4914	* 1.5387	* 2.0217	* 3.3249	*	*
15	* 0.7235	* 0.7479	* 0.6997	* 0.6561	* F-SUB-Q			
	* 2.3469	* 2.2899	* 2.4512	* 2.7166	* M-SUB-Q			

AT 100% POWER, 250 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1740	* 1.2342	* 1.5166	* 1.2793	* 1.5393	* 1.2740	* 1.4913	* 0.7878
	* 1.7165	* 1.6199	* 1.3250	* 1.5108	* 1.2750	* 1.4981	* 1.2948	* 2.1849
9	* 1.2342	* 1.4961	* 1.2551	* 1.5224	* 1.3025	* 1.3995	* 1.5098	* 0.8145
	* 1.6199	* 1.3590	* 1.5724	* 1.3078	* 1.4991	* 1.3648	* 1.2889	* 2.1312
10	* 1.5166	* 1.2535	* 1.3555	* 1.3940	* 1.5304	* 1.3941	* 1.5044	* 0.7595
	* 1.3250	* 1.5755	* 1.4630	* 1.4303	* 1.3192	* 1.4048	* 1.3165	* 2.2882
11	* 1.2793	* 1.5204	* 1.3914	* 1.5288	* 1.4194	* 1.5579	* 1.4677	* 0.7150
	* 1.5108	* 1.3083	* 1.4328	* 1.3134	* 1.3725	* 1.2799	* 1.3578	* 2.5240
12	* 1.5393	* 1.3015	* 1.5293	* 1.4187	* 1.3495	* 1.4825	* 0.9377	*
	* 1.2750	* 1.5004	* 1.3203	* 1.3733	* 1.4261	* 1.3227	* 1.8879	*
13	* 1.2740	* 1.3992	* 1.3934	* 1.5573	* 1.4818	* 0.9941	* 0.5680	*
	* 1.4981	* 1.3651	* 1.4052	* 1.2804	* 1.3233	* 1.9455	* 3.1051	*
14	* 1.4913	* 1.5094	* 1.5040	* 1.4670	* 0.9367	* 0.5566	*	*
	* 1.2948	* 1.2891	* 1.3169	* 1.3585	* 1.8898	* 3.1382	*	*
15	* 0.7878	* 0.8145	* 0.7593	* 0.7147	* F-SUB-Q			
	* 2.1849	* 2.1313	* 2.2890	* 2.5253	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 40 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 250 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2220	* 1.2904	* 1.6111	* 1.3385	* 1.6309	* 1.3273	* 1.5837	* 0.8228
	* 1.6856	* 1.5812	* 1.2676	* 1.4681	* 1.2229	* 1.4611	* 1.2376	* 2.1249
9	* 1.2904	* 1.5867	* 1.3132	* 1.6137	* 1.3611	* 1.4668	* 1.6038	* 0.8543
	* 1.5812	* 1.3061	* 1.5278	* 1.2541	* 1.4574	* 1.3218	* 1.2314	* 2.0638
10	* 1.6111	* 1.3114	* 1.4120	* 1.4630	* 1.6319	* 1.4597	* 1.5991	* 0.7947
	* 1.2676	* 1.5309	* 1.4265	* 1.3838	* 1.2596	* 1.3630	* 1.2553	* 2.2198
11	* 1.3385	* 1.6115	* 1.4602	* 1.6302	* 1.4901	* 1.6548	* 1.5644	* 0.7499
	* 1.4681	* 1.2555	* 1.3863	* 1.2555	* 1.3329	* 1.2280	* 1.2972	* 2.4396
12	* 1.6309	* 1.3601	* 1.6307	* 1.4894	* 1.4120	* 1.5795	* 0.9863	*
	* 1.2229	* 1.4587	* 1.2607	* 1.3337	* 1.3919	* 1.2669	* 1.8309	*
13	* 1.3273	* 1.4665	* 1.4590	* 1.6541	* 1.5788	* 1.0473	* 0.5931	*
	* 1.4611	* 1.3220	* 1.3634	* 1.2286	* 1.2675	* 1.8873	* 3.0396	*
14	* 1.5837	* 1.6034	* 1.5986	* 1.5636	* 0.9854	* 0.5811	*	*
	* 1.2376	* 1.2316	* 1.2557	* 1.2979	* 1.8325	* 3.0728	*	*
15	* 0.8228	* 0.8543	* 0.7944	* 0.7496	* F-SUB-Q			
	* 2.1249	* 2.0639	* 2.2206	* 2.4408	* M-SUB-Q			

AT 100% POWER, 250 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2440	* 1.3187	* 1.6588	* 1.3675	* 1.6754	* 1.3511	* 1.6285	* 0.8424
	* 1.6865	* 1.5740	* 1.2530	* 1.4643	* 1.2126	* 1.4594	* 1.2246	* 2.1141
9	* 1.3187	* 1.6313	* 1.3419	* 1.6615	* 1.3897	* 1.4979	* 1.6496	* 0.8762
	* 1.5740	* 1.2917	* 1.5221	* 1.2388	* 1.4530	* 1.3170	* 1.2178	* 2.0489
10	* 1.6588	* 1.3400	* 1.4382	* 1.4983	* 1.6841	* 1.4905	* 1.6453	* 0.8168
	* 1.2530	* 1.5252	* 1.4240	* 1.3736	* 1.2399	* 1.3572	* 1.2388	* 2.1963
11	* 1.3675	* 1.6582	* 1.4953	* 1.6822	* 1.5250	* 1.7028	* 1.6120	* 0.7693
	* 1.4643	* 1.2410	* 1.3762	* 1.2389	* 1.3264	* 1.2154	* 1.2801	* 2.4130
12	* 1.6754	* 1.3885	* 1.6827	* 1.5243	* 1.4409	* 1.6267	* 1.0161	*
	* 1.2126	* 1.4544	* 1.2409	* 1.3272	* 1.3929	* 1.2570	* 1.8136	*
13	* 1.3511	* 1.4976	* 1.4897	* 1.7021	* 1.6259	* 1.0765	* 0.6083	*
	* 1.4594	* 1.3172	* 1.3577	* 1.2159	* 1.2575	* 1.8804	* 3.0348	*
14	* 1.6285	* 1.6492	* 1.6448	* 1.6112	* 1.0158	* 0.5957	*	*
	* 1.2246	* 1.2180	* 1.2392	* 1.2807	* 1.8142	* 3.0694	*	*
15	* 0.8424	* 0.8761	* 0.8165	* 0.7689	* F-SUB-Q			
	* 2.1141	* 2.0490	* 2.1971	* 2.4142	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 41 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 250 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2624 *	* 1.3408 *	* 1.7031 *	* 1.3909 *	* 1.7175 *	* 1.3707 *	* 1.6716 *	* 0.8496 *
	* 1.6889 *	* 1.5679 *	* 1.2447 *	* 1.4712 *	* 1.2088 *	* 1.4669 *	* 1.2182 *	* 2.1410 *
9	* 1.3408 *	* 1.6743 *	* 1.3652 *	* 1.7086 *	* 1.4129 *	* 1.5253 *	* 1.6938 *	* 0.8842 *
	* 1.5679 *	* 1.2743 *	* 1.5263 *	* 1.2291 *	* 1.4584 *	* 1.3201 *	* 1.2106 *	* 2.0738 *
10	* 1.7031 *	* 1.3632 *	* 1.4610 *	* 1.5286 *	* 1.7336 *	* 1.5168 *	* 1.6896 *	* 0.8216 *
	* 1.2447 *	* 1.5295 *	* 1.4261 *	* 1.3703 *	* 1.2203 *	* 1.3540 *	* 1.2279 *	* 2.2267 *
11	* 1.3909 *	* 1.7051 *	* 1.5254 *	* 1.7304 *	* 1.5548 *	* 1.7478 *	* 1.6565 *	* 0.7756 *
	* 1.4712 *	* 1.2314 *	* 1.3729 *	* 1.2233 *	* 1.3219 *	* 1.2031 *	* 1.2619 *	* 2.4286 *
12	* 1.7175 *	* 1.4117 *	* 1.7321 *	* 1.5541 *	* 1.4654 *	* 1.6707 *	* 1.0263 *	
	* 1.2088 *	* 1.4597 *	* 1.2214 *	* 1.3227 *	* 1.3992 *	* 1.2499 *	* 1.8294 *	
13	* 1.3707 *	* 1.5249 *	* 1.5159 *	* 1.7471 *	* 1.6699 *	* 1.0912 *	* 0.6120 *	
	* 1.4669 *	* 1.3204 *	* 1.3548 *	* 1.2036 *	* 1.2505 *	* 1.8953 *	* 3.0827 *	
14	* 1.6716 *	* 1.6934 *	* 1.6891 *	* 1.6557 *	* 1.0255 *	* 0.5985 *		
	* 1.2182 *	* 1.2107 *	* 1.2283 *	* 1.2625 *	* 1.8307 *	* 3.1219 *		
15	* 0.8496 *	* 0.8841 *	* 0.8212 *	* 0.7752 *	* F-SUB-Q			
	* 2.1410 *	* 2.0739 *	* 2.2276 *	* 2.4298 *	* M-SUB-Q			

AT 100% POWER, 250 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2703 *	* 1.3514 *	* 1.7265 *	* 1.4018 *	* 1.7388 *	* 1.3784 *	* 1.6939 *	* 0.8533 *
	* 1.7147 *	* 1.5908 *	* 1.2541 *	* 1.4968 *	* 1.2244 *	* 1.4933 *	* 1.2320 *	* 2.1855 *
9	* 1.3514 *	* 1.6967 *	* 1.3765 *	* 1.7336 *	* 1.4237 *	* 1.5381 *	* 1.7169 *	* 0.8886 *
	* 1.5908 *	* 1.2858 *	* 1.5472 *	* 1.2396 *	* 1.4810 *	* 1.3410 *	* 1.2233 *	* 2.1149 *
10	* 1.7265 *	* 1.3744 *	* 1.4710 *	* 1.5441 *	* 1.7604 *	* 1.5285 *	* 1.7127 *	* 0.8252 *
	* 1.2541 *	* 1.5505 *	* 1.4425 *	* 1.3809 *	* 1.2271 *	* 1.3707 *	* 1.2364 *	* 2.2673 *
11	* 1.4018 *	* 1.7300 *	* 1.5408 *	* 1.7562 *	* 1.5694 *	* 1.7713 *	* 1.6800 *	* 0.7790 *
	* 1.4968 *	* 1.2419 *	* 1.3835 *	* 1.2294 *	* 1.3355 *	* 1.2100 *	* 1.2689 *	* 2.4567 *
12	* 1.7388 *	* 1.4224 *	* 1.7588 *	* 1.5686 *	* 1.4760 *	* 1.6936 *	* 1.0334 *	
	* 1.2244 *	* 1.4824 *	* 1.2282 *	* 1.3363 *	* 1.4135 *	* 1.2549 *	* 1.8494 *	
13	* 1.3784 *	* 1.5376 *	* 1.5276 *	* 1.7706 *	* 1.6928 *	* 1.0993 *	* 0.6141 *	
	* 1.4933 *	* 1.3413 *	* 1.3713 *	* 1.2105 *	* 1.2555 *	* 1.9187 *	* 3.1257 *	
14	* 1.6939 *	* 1.7164 *	* 1.7121 *	* 1.6791 *	* 1.0328 *	* 0.5999 *		
	* 1.2320 *	* 1.2235 *	* 1.2368 *	* 1.2695 *	* 1.8505 *	* 3.1687 *		
15	* 0.8533 *	* 0.8886 *	* 0.8248 *	* 0.7786 *	* F-SUB-Q			
	* 2.1855 *	* 2.1150 *	* 2.2682 *	* 2.4579 *	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 42 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 250 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2778	* 1.3603	* 1.7495	* 1.4107	* 1.7600	* 1.3855	* 1.7157	* 0.8534 *
	* 1.7617	* 1.6198	* 1.2701	* 1.5315	* 1.2458	* 1.5284	* 1.2520	* 2.2495 *
9	* 1.3603	* 1.7193	* 1.3859	* 1.7580	* 1.4322	* 1.5500	* 1.7392	* 0.8869 *
	* 1.6198	* 1.2997	* 1.5773	* 1.2559	* 1.5112	* 1.3689	* 1.2409	* 2.1808 *
10	* 1.7495	* 1.3838	* 1.4801	* 1.5577	* 1.7859	* 1.5386	* 1.7349	* 0.8246 *
	* 1.2701	* 1.5803	* 1.4684	* 1.4023	* 1.2375	* 1.3933	* 1.2507	* 2.3295 *
11	* 1.4107	* 1.7542	* 1.5543	* 1.7807	* 1.5820	* 1.7937	* 1.7020	* 0.7772 *
	* 1.5315	* 1.2583	* 1.4051	* 1.2473	* 1.3630	* 1.2288	* 1.2820	* 2.5172 *
12	* 1.7600	* 1.4310	* 1.7842	* 1.5812	* 1.4854	* 1.7154	* 1.0346	*
	* 1.2458	* 1.5127	* 1.2386	* 1.3637	* 1.4474	* 1.2746	* 1.8988	*
13	* 1.3855	* 1.5495	* 1.5376	* 1.7929	* 1.7146	* 1.1031	* 0.6133	*
	* 1.5284	* 1.3693	* 1.3942	* 1.2293	* 1.2752	* 1.9671	* 3.2151	*
14	* 1.7157	* 1.7387	* 1.7342	* 1.7011	* 1.0340	* 0.5984	*	
	* 1.2520	* 1.2412	* 1.2512	* 1.2827	* 1.8997	* 3.2630	*	
15	* 0.8534	* 0.8868	* 0.8243	* 0.7767	* F-SUB-Q			
	* 2.2495	* 2.1809	* 2.3305	* 2.5187	* M-SUB-Q			

AT 100% POWER, 250 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2695	* 1.3537	* 1.7360	* 1.4017	* 1.7445	* 1.3758	* 1.7014	* 0.8584 *
	* 1.8249	* 1.6768	* 1.3216	* 1.5946	* 1.3006	* 1.5923	* 1.3056	* 2.3150 *
9	* 1.3537	* 1.7057	* 1.3778	* 1.7444	* 1.4242	* 1.5388	* 1.7248	* 0.8942 *
	* 1.6768	* 1.3494	* 1.6381	* 1.3070	* 1.5679	* 1.4252	* 1.2915	* 2.2360 *
10	* 1.7360	* 1.3757	* 1.4702	* 1.5491	* 1.7727	* 1.5267	* 1.7204	* 0.8333 *
	* 1.3216	* 1.6414	* 1.5246	* 1.4545	* 1.2828	* 1.4444	* 1.2991	* 2.3781 *
11	* 1.4017	* 1.7404	* 1.5457	* 1.7698	* 1.5730	* 1.7793	* 1.6885	* 0.7836 *
	* 1.5946	* 1.3095	* 1.4572	* 1.2884	* 1.4082	* 1.2714	* 1.3274	* 2.5694 *
12	* 1.7445	* 1.4230	* 1.7710	* 1.5723	* 1.4741	* 1.7013	* 1.0462	*
	* 1.3006	* 1.5695	* 1.2840	* 1.4090	* 1.5067	* 1.3272	* 1.9308	*
13	* 1.3758	* 1.5382	* 1.5257	* 1.7785	* 1.7005	* 1.1070	* 0.6185	*
	* 1.5923	* 1.4256	* 1.4454	* 1.2720	* 1.3279	* 2.0303	* 3.2889	*
14	* 1.7014	* 1.7243	* 1.7197	* 1.6876	* 1.0458	* 0.6038	*	
	* 1.3056	* 1.2919	* 1.2996	* 1.3281	* 1.9313	* 3.3361	*	
15	* 0.8584	* 0.8942	* 0.8329	* 0.7831	* F-SUB-Q			
	* 2.3150	* 2.2362	* 2.3791	* 2.5708	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 43 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 250 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2802	* 1.3655	* 1.7695	* 1.4144	* 1.7762	* 1.3886	* 1.7348	* 0.8524
	* 1.8760	* 1.7265	* 1.3461	* 1.6433	* 1.3286	* 1.6398	* 1.3306	* 2.4194
9	* 1.3655	* 1.7392	* 1.3910	* 1.7796	* 1.4356	* 1.5573	* 1.7591	* 0.8878
	* 1.7265	* 1.3743	* 1.6845	* 1.3301	* 1.6140	* 1.4628	* 1.3140	* 2.3388
10	* 1.7695	* 1.3888	* 1.4833	* 1.5679	* 1.8093	* 1.5422	* 1.7543	* 0.8243
	* 1.3461	* 1.6877	* 1.5679	* 1.4906	* 1.3029	* 1.4819	* 1.3198	* 2.4922
11	* 1.4144	* 1.7755	* 1.5642	* 1.8040	* 1.5904	* 1.8121	* 1.7217	* 0.7771
	* 1.6433	* 1.3328	* 1.4937	* 1.3091	* 1.4423	* 1.2926	* 1.3477	* 2.6795
12	* 1.7762	* 1.4343	* 1.8075	* 1.5897	* 1.4885	* 1.7339	* 1.0382	*
	* 1.3286	* 1.6156	* 1.3041	* 1.4430	* 1.5413	* 1.3446	* 2.0101	*
13	* 1.3886	* 1.5566	* 1.5411	* 1.8113	* 1.7330	* 1.1066	* 0.6119	*
	* 1.6398	* 1.4633	* 1.4829	* 1.2931	* 1.3452	* 2.0931	* 3.4232	*
14	* 1.7348	* 1.7585	* 1.7536	* 1.7208	* 1.0376	* 0.5962	*	*
	* 1.3306	* 1.3144	* 1.3203	* 1.3484	* 2.0111	* 3.4794	*	*
15	* 0.8524	* 0.8877	* 0.8239	* 0.7766	* F-SUB-Q			
	* 2.4194	* 2.3390	* 2.4932	* 2.6811	* M-SUB-Q			

AT 100% POWER, 250 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2813	* 1.3677	* 1.7786	* 1.4158	* 1.7836	* 1.3900	* 1.7437	* 0.8519
	* 1.9224	* 1.7649	* 1.3822	* 1.6975	* 1.3778	* 1.7095	* 1.3810	* 2.5238
9	* 1.3677	* 1.7482	* 1.3930	* 1.7888	* 1.4365	* 1.5606	* 1.7684	* 0.8884
	* 1.7649	* 1.4082	* 1.7285	* 1.3770	* 1.6778	* 1.5224	* 1.3623	* 2.4363
10	* 1.7786	* 1.3908	* 1.4843	* 1.5721	* 1.8192	* 1.5435	* 1.7634	* 0.8241
	* 1.3822	* 1.7318	* 1.6212	* 1.5467	* 1.3489	* 1.5408	* 1.3669	* 2.5951
11	* 1.4158	* 1.7845	* 1.5683	* 1.8133	* 1.5938	* 1.8207	* 1.7310	* 0.7771
	* 1.6975	* 1.3801	* 1.5500	* 1.3566	* 1.4991	* 1.3397	* 1.3944	* 2.7835
12	* 1.7836	* 1.4353	* 1.8173	* 1.5931	* 1.4896	* 1.7424	* 1.0398	*
	* 1.3778	* 1.6795	* 1.3502	* 1.4999	* 1.6023	* 1.3915	* 2.0871	*
13	* 1.3900	* 1.5600	* 1.5423	* 1.8199	* 1.7415	* 1.1079	* 0.6113	*
	* 1.7095	* 1.5229	* 1.5418	* 1.3403	* 1.3921	* 2.1716	* 3.5558	*
14	* 1.7437	* 1.7677	* 1.7626	* 1.7300	* 1.0392	* 0.5952	*	*
	* 1.3810	* 1.3627	* 1.3675	* 1.3951	* 2.0881	* 3.6172	*	*
15	* 0.8519	* 0.8883	* 0.8237	* 0.7765	* F-SUB-Q			
	* 2.5238	* 2.4365	* 2.5962	* 2.7851	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 44 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 250 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2759	* 1.3614	* 1.7665	* 1.4074	* 1.7699	* 1.3819	* 1.7324	* 0.8560
	* 1.8792	* 1.7282	* 1.3568	* 1.6641	* 1.3534	* 1.6945	* 1.3829	* 2.5009
9	* 1.3614	* 1.7363	* 1.3854	* 1.7761	* 1.4286	* 1.5515	* 1.7570	* 0.8930
	* 1.7282	* 1.3827	* 1.6941	* 1.3526	* 1.6449	* 1.5147	* 1.3677	* 2.4124
10	* 1.7665	* 1.3832	* 1.4749	* 1.5642	* 1.8069	* 1.5330	* 1.7519	* 0.8314
	* 1.3568	* 1.6973	* 1.5910	* 1.5163	* 1.3378	* 1.5314	* 1.3749	* 2.5658
11	* 1.4074	* 1.7718	* 1.5606	* 1.8031	* 1.5858	* 1.8088	* 1.7204	* 0.7807
	* 1.6641	* 1.3557	* 1.5194	* 1.3437	* 1.4835	* 1.3416	* 1.4067	* 2.7739
12	* 1.7699	* 1.4273	* 1.8049	* 1.5852	* 1.4798	* 1.7309	* 1.0492	*
	* 1.3534	* 1.6466	* 1.3393	* 1.4842	* 1.6060	* 1.4081	* 2.0711	*
13	* 1.3819	* 1.5508	* 1.5318	* 1.8080	* 1.7300	* 1.1108	* 0.6149	*
	* 1.6945	* 1.5152	* 1.5324	* 1.3422	* 1.4088	* 2.1785	* 3.5640	*
14	* 1.7324	* 1.7564	* 1.7511	* 1.7194	* 1.0488	* 0.5989	*	*
	* 1.3829	* 1.3682	* 1.3755	* 1.4074	* 2.0718	* 3.6239	*	*
15	* 0.8560	* 0.8929	* 0.8310	* 0.7802	* F-SUB-Q			
	* 2.5009	* 2.4127	* 2.5670	* 2.7756	* M-SUB-Q			

AT 100% POWER, 250 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2831	* 1.3717	* 1.7969	* 1.4185	* 1.7985	* 1.3939	* 1.7646	* 0.8495
	* 1.8293	* 1.6761	* 1.3048	* 1.6142	* 1.3031	* 1.6426	* 1.3279	* 2.4579
9	* 1.3717	* 1.7668	* 1.3968	* 1.8079	* 1.4379	* 1.5689	* 1.7898	* 0.8860
	* 1.6761	* 1.3292	* 1.6419	* 1.2999	* 1.5984	* 1.4651	* 1.3127	* 2.3731
10	* 1.7969	* 1.3945	* 1.4858	* 1.5807	* 1.8402	* 1.5468	* 1.7843	* 0.8222
	* 1.3048	* 1.6450	* 1.5442	* 1.4672	* 1.2839	* 1.4840	* 1.3193	* 2.5319
11	* 1.4185	* 1.8033	* 1.5767	* 1.8342	* 1.6008	* 1.8399	* 1.7530	* 0.7739
	* 1.6142	* 1.3029	* 1.4704	* 1.2907	* 1.4358	* 1.2880	* 1.3478	* 2.7293
12	* 1.7985	* 1.4366	* 1.8382	* 1.6002	* 1.4926	* 1.7621	* 1.0412	*
	* 1.3031	* 1.6000	* 1.2853	* 1.4365	* 1.5547	* 1.3496	* 2.0365	*
13	* 1.3939	* 1.5681	* 1.5455	* 1.8391	* 1.7612	* 1.1099	* 0.6081	*
	* 1.6426	* 1.4657	* 1.4850	* 1.2885	* 1.3503	* 2.1264	* 3.5101	*
14	* 1.7646	* 1.7891	* 1.7835	* 1.7521	* 1.0407	* 0.5911	*	*
	* 1.3279	* 1.3132	* 1.3199	* 1.3486	* 2.0373	* 3.5756	*	*
15	* 0.8495	* 0.8859	* 0.8218	* 0.7734	* F-SUB-Q			
	* 2.4579	* 2.3733	* 2.5331	* 2.7311	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 45 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 250 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2853	* 1.3753	* 1.8095	* 1.4218	* 1.8096	* 1.3983	* 1.7792	* 0.8478 *
	* 1.7578	* 1.6089	* 1.2478	* 1.5506	* 1.2475	* 1.5769	* 1.2695	* 2.3691 *
9	* 1.3753	* 1.7793	* 1.4005	* 1.8206	* 1.4401	* 1.5764	* 1.8046	* 0.8833 *
	* 1.6089	* 1.2708	* 1.5764	* 1.2441	* 1.5368	* 1.4051	* 1.2556	* 2.2899 *
10	* 1.8095	* 1.3981	* 1.4881	* 1.5872	* 1.8542	* 1.5511	* 1.7989	* 0.8203 *
	* 1.2477	* 1.5794	* 1.4844	* 1.4081	* 1.2302	* 1.4267	* 1.2624	* 2.4408 *
11	* 1.4218	* 1.8159	* 1.5832	* 1.8473	* 1.6066	* 1.8537	* 1.7686	* 0.7706 *
	* 1.5506	* 1.2470	* 1.4113	* 1.2377	* 1.3810	* 1.2350	* 1.2892	* 2.6347 *
12	* 1.8096	* 1.4388	* 1.8522	* 1.6060	* 1.4965	* 1.7760	* 1.0406	*
	* 1.2475	* 1.5383	* 1.2316	* 1.3817	* 1.4985	* 1.2938	* 1.9616	*
13	* 1.3983	* 1.5756	* 1.5498	* 1.8528	* 1.7751	* 1.1109	* 0.6055	*
	* 1.5769	* 1.4057	* 1.4277	* 1.2356	* 1.2945	* 2.0470	* 3.3833	*
14	* 1.7792	* 1.8039	* 1.7981	* 1.7676	* 1.0403	* 0.5881	*	
	* 1.2695	* 1.2561	* 1.2629	* 1.2899	* 1.9620	* 3.4498	*	
15	* 0.8478	* 0.8832	* 0.8199	* 0.7701	* F-SUB-Q			
	* 2.3691	* 2.2901	* 2.4419	* 2.6364	* M-SUB-Q			

AT 100% POWER, 250 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2839	* 1.3744	* 1.8115	* 1.4199	* 1.8107	* 1.3978	* 1.7833	* 0.8479 *
	* 1.6990	* 1.5542	* 1.2029	* 1.4990	* 1.2033	* 1.5225	* 1.2218	* 2.2864 *
9	* 1.3744	* 1.7817	* 1.3989	* 1.8222	* 1.4381	* 1.5781	* 1.8092	* 0.8859 *
	* 1.5542	* 1.2248	* 1.5236	* 1.1996	* 1.4853	* 1.3542	* 1.2078	* 2.2035 *
10	* 1.8115	* 1.3965	* 1.4862	* 1.5873	* 1.8566	* 1.5496	* 1.8034	* 0.8215 *
	* 1.2029	* 1.5266	* 1.4346	* 1.3587	* 1.1850	* 1.3771	* 1.2141	* 2.3513 *
11	* 1.4199	* 1.8174	* 1.5832	* 1.8504	* 1.6064	* 1.8576	* 1.7732	* 0.7733 *
	* 1.4990	* 1.2025	* 1.3618	* 1.1915	* 1.3319	* 1.1876	* 1.2387	* 2.5319 *
12	* 1.8107	* 1.4368	* 1.8544	* 1.6058	* 1.4953	* 1.7796	* 1.0440	*
	* 1.2033	* 1.4868	* 1.1864	* 1.3325	* 1.4456	* 1.2434	* 1.8835	*
13	* 1.3978	* 1.5773	* 1.5482	* 1.8567	* 1.7787	* 1.1126	* 0.6057	*
	* 1.5225	* 1.3548	* 1.3781	* 1.1881	* 1.2440	* 1.9684	* 3.2586	*
14	* 1.7833	* 1.8085	* 1.8025	* 1.7722	* 1.0436	* 0.5881	*	
	* 1.2218	* 1.2083	* 1.2146	* 1.2394	* 1.8842	* 3.3235	*	
15	* 0.8479	* 0.8858	* 0.8211	* 0.7727	* F-SUB-Q			
	* 2.2864	* 2.2038	* 2.3525	* 2.5337	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 46 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 250 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2798	* 1.3670	* 1.7968	* 1.4108	* 1.7957	* 1.3910	* 1.7712	* 0.8517
	* 1.7790	* 1.6346	* 1.2685	* 1.5789	* 1.2691	* 1.6003	* 1.2860	* 2.3822
9	* 1.3670	* 1.7670	* 1.3901	* 1.8059	* 1.4303	* 1.5706	* 1.7978	* 0.8904
	* 1.6347	* 1.2913	* 1.6046	* 1.2658	* 1.5631	* 1.4227	* 1.2703	* 2.2933
10	* 1.7968	* 1.3881	* 1.4763	* 1.5784	* 1.8407	* 1.5394	* 1.7919	* 0.8282
	* 1.2685	* 1.6074	* 1.5109	* 1.4290	* 1.2490	* 1.4485	* 1.2765	* 2.4385
11	* 1.4108	* 1.8011	* 1.5745	* 1.8358	* 1.5972	* 1.8459	* 1.7623	* 0.7765
	* 1.5789	* 1.2690	* 1.4321	* 1.2546	* 1.3993	* 1.2477	* 1.3010	* 2.6348
12	* 1.7957	* 1.4281	* 1.8386	* 1.5967	* 1.4858	* 1.7674	* 1.0527	*
	* 1.2691	* 1.5647	* 1.2504	* 1.3999	* 1.5185	* 1.3057	* 1.9497	*
13	* 1.3910	* 1.5698	* 1.5380	* 1.8450	* 1.7665	* 1.1147	* 0.6085	*
	* 1.6003	* 1.4234	* 1.4497	* 1.2482	* 1.3064	* 2.0492	* 3.3858	*
14	* 1.7712	* 1.7970	* 1.7910	* 1.7612	* 1.0521	* 0.5910	*	*
	* 1.2860	* 1.2708	* 1.2771	* 1.3018	* 1.9507	* 3.4518	*	*
15	* 0.8517	* 0.8902	* 0.8278	* 0.7759	* F-SUB-Q			
	* 2.3822	* 2.2937	* 2.4398	* 2.6367	* M-SUB-Q			

AT 100% POWER, 250 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2805	* 1.3714	* 1.8202	* 1.4162	* 1.8189	* 1.3991	* 1.7996	* 0.8406
	* 1.7178	* 1.5760	* 1.2117	* 1.5240	* 1.2137	* 1.5430	* 1.2267	* 2.3408
9	* 1.3714	* 1.7909	* 1.3954	* 1.8302	* 1.4331	* 1.5851	* 1.8269	* 0.8775
	* 1.5760	* 1.2316	* 1.5477	* 1.2088	* 1.5099	* 1.3664	* 1.2106	* 2.2576
10	* 1.8202	* 1.3930	* 1.4822	* 1.5887	* 1.8668	* 1.5496	* 1.8207	* 0.8145
	* 1.2117	* 1.5508	* 1.4566	* 1.3740	* 1.1905	* 1.3932	* 1.2159	* 2.4041
11	* 1.4162	* 1.8252	* 1.5844	* 1.8593	* 1.6066	* 1.8734	* 1.7913	* 0.7644
	* 1.5240	* 1.2119	* 1.3773	* 1.1966	* 1.3440	* 1.1874	* 1.2367	* 2.5925
12	* 1.8189	* 1.4318	* 1.8646	* 1.6061	* 1.4947	* 1.7945	* 1.0386	*
	* 1.2137	* 1.5115	* 1.1918	* 1.3446	* 1.4538	* 1.2396	* 1.9082	*
13	* 1.3991	* 1.5842	* 1.5481	* 1.8725	* 1.7935	* 1.1084	* 0.5980	*
	* 1.5430	* 1.3670	* 1.3944	* 1.1879	* 1.2403	* 1.9859	* 3.3303	*
14	* 1.7996	* 1.8262	* 1.8198	* 1.7902	* 1.0383	* 0.5798	*	*
	* 1.2267	* 1.2111	* 1.2164	* 1.2374	* 1.9084	* 3.4019	*	*
15	* 0.8406	* 0.8774	* 0.8140	* 0.7638	* F-SUB-Q			
	* 2.3408	* 2.2579	* 2.4053	* 2.5944	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 47 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 250 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2694 *	* 1.3587 *	* 1.8058 *	* 1.4030 *	* 1.8057 *	* 1.3900 *	* 1.7909 *	* 0.8319 *
	* 1.6681 *	* 1.5343 *	* 1.1779 *	* 1.4847 *	* 1.1793 *	* 1.4986 *	* 1.1886 *	* 2.2837 *
9	* 1.3587 *	* 1.7775 *	* 1.3823 *	* 1.8152 *	* 1.4199 *	* 1.5773 *	* 1.8190 *	* 0.8688 *
	* 1.5343 *	* 1.1962 *	* 1.5077 *	* 1.1754 *	* 1.4703 *	* 1.3245 *	* 1.1720 *	* 2.2012 *
10	* 1.8058 *	* 1.3798 *	* 1.4698 *	* 1.5767 *	* 1.8527 *	* 1.5385 *	* 1.8127 *	* 0.8063 *
	* 1.1779 *	* 1.5108 *	* 1.4173 *	* 1.3353 *	* 1.1560 *	* 1.3526 *	* 1.1769 *	* 2.3436 *
11	* 1.4030 *	* 1.8101 *	* 1.5723 *	* 1.8451 *	* 1.5944 *	* 1.8646 *	* 1.7831 *	* 0.7563 *
	* 1.4847 *	* 1.1786 *	* 1.3387 *	* 1.1617 *	* 1.3051 *	* 1.1488 *	* 1.1966 *	* 2.5276 *
12	* 1.8057 *	* 1.4186 *	* 1.8504 *	* 1.5939 *	* 1.4837 *	* 1.7847 *	* 1.0297 *	
	* 1.1793 *	* 1.4719 *	* 1.1574 *	* 1.3057 *	* 1.4080 *	* 1.1989 *	* 1.8538 *	
13	* 1.3900 *	* 1.5763 *	* 1.5369 *	* 1.8636 *	* 1.7837 *	* 1.0986 *	* 0.5906 *	
	* 1.4986 *	* 1.3251 *	* 1.3539 *	* 1.1493 *	* 1.1995 *	* 1.9277 *	* 3.2503 *	
14	* 1.7909 *	* 1.8182 *	* 1.8117 *	* 1.7819 *	* 1.0295 *	* 0.5724 *		
	* 1.1886 *	* 1.1725 *	* 1.1775 *	* 1.1972 *	* 1.8540 *	* 3.3215 *		
15	* 0.8319 *	* 0.8686 *	* 0.8059 *	* 0.7557 *	F-SUB-Q			
	* 2.2837 *	* 2.2016 *	* 2.3448 *	* 2.5296 *	M-SUB-Q			

AT 100% POWER, 250 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2400 *	* 1.3217 *	* 1.7394 *	* 1.3632 *	* 1.7423 *	* 1.3559 *	* 1.7303 *	* 0.8221 *
	* 1.6558 *	* 1.5292 *	* 1.1851 *	* 1.4820 *	* 1.1847 *	* 1.4896 *	* 1.1921 *	* 2.2427 *
9	* 1.3217 *	* 1.7134 *	* 1.3432 *	* 1.7470 *	* 1.3848 *	* 1.5372 *	* 1.7581 *	* 0.8602 *
	* 1.5292 *	* 1.2025 *	* 1.5049 *	* 1.1836 *	* 1.4627 *	* 1.3173 *	* 1.1747 *	* 2.1571 *
10	* 1.7394 *	* 1.3408 *	* 1.4319 *	* 1.5327 *	* 1.7837 *	* 1.4976 *	* 1.7517 *	* 0.8002 *
	* 1.1851 *	* 1.5078 *	* 1.4108 *	* 1.3314 *	* 1.1631 *	* 1.3455 *	* 1.1795 *	* 2.2909 *
11	* 1.3632 *	* 1.7421 *	* 1.5286 *	* 1.7792 *	* 1.5512 *	* 1.8044 *	* 1.7223 *	* 0.7489 *
	* 1.4820 *	* 1.1869 *	* 1.3346 *	* 1.1666 *	* 1.2994 *	* 1.1491 *	* 1.1990 *	* 2.4756 *
12	* 1.7423 *	* 1.3825 *	* 1.7815 *	* 1.5507 *	* 1.4446 *	* 1.7234 *	* 1.0216 *	
	* 1.1847 *	* 1.4652 *	* 1.1644 *	* 1.2999 *	* 1.4000 *	* 1.2008 *	* 1.8096 *	
13	* 1.3559 *	* 1.5363 *	* 1.4961 *	* 1.8033 *	* 1.7224 *	* 1.0792 *	* 0.5841 *	
	* 1.4896 *	* 1.3180 *	* 1.3468 *	* 1.1497 *	* 1.2015 *	* 1.8997 *	* 3.1866 *	
14	* 1.7303 *	* 1.7572 *	* 1.7507 *	* 1.7211 *	* 1.0210 *	* 0.5668 *		
	* 1.1921 *	* 1.1753 *	* 1.1801 *	* 1.1998 *	* 1.8105 *	* 3.2519 *		
15	* 0.8221 *	* 0.8600 *	* 0.7997 *	* 0.7483 *	F-SUB-Q			
	* 2.2427 *	* 2.1575 *	* 2.2921 *	* 2.4775 *	M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 48 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 250 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2006	* 1.2778	* 1.6799	* 1.3194	* 1.6874	* 1.3176	* 1.6778	* 0.7827
	* 1.6671	* 1.5418	* 1.1954	* 1.4927	* 1.1919	* 1.4947	* 1.1975	* 2.2974
9	* 1.2778	* 1.6576	* 1.3003	* 1.6880	* 1.3380	* 1.4957	* 1.7055	* 0.8188
	* 1.5418	* 1.2108	* 1.5154	* 1.1934	* 1.4746	* 1.3192	* 1.1792	* 2.2106
10	* 1.6799	* 1.2979	* 1.3927	* 1.4877	* 1.7235	* 1.4572	* 1.6988	* 0.7598
	* 1.1954	* 1.5186	* 1.4140	* 1.3365	* 1.1721	* 1.3474	* 1.1842	* 2.3528
11	* 1.3194	* 1.6831	* 1.4833	* 1.7180	* 1.5045	* 1.7503	* 1.6677	* 0.7123
	* 1.4927	* 1.1968	* 1.3401	* 1.1764	* 1.3048	* 1.1529	* 1.2053	* 2.5384
12	* 1.6874	* 1.3367	* 1.7213	* 1.5040	* 1.4044	* 1.6688	* 0.9715	*
	* 1.1919	* 1.4761	* 1.1735	* 1.3054	* 1.4025	* 1.2067	* 1.8536	*
13	* 1.3176	* 1.4948	* 1.4557	* 1.7493	* 1.6678	* 1.0319	* 0.5548	*
	* 1.4947	* 1.3199	* 1.3487	* 1.1535	* 1.2074	* 1.9353	* 3.2716	*
14	* 1.6778	* 1.7047	* 1.6978	* 1.6665	* 0.9707	* 0.5376	*	*
	* 1.1975	* 1.1797	* 1.1849	* 1.2061	* 1.8549	* 3.3439	*	*
15	* 0.7827	* 0.8186	* 0.7594	* 0.7116	* F-SUB-Q			
	* 2.2974	* 2.2109	* 2.3542	* 2.5405	* M-SUB-Q			

AT 100% POWER, 250 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1080	* 1.1783	* 1.5220	* 1.2160	* 1.5303	* 1.2163	* 1.5187	* 0.7215
	* 1.7704	* 1.6381	* 1.2918	* 1.5865	* 1.2868	* 1.5862	* 1.2952	* 2.4443
9	* 1.1783	* 1.5000	* 1.1998	* 1.5316	* 1.2373	* 1.3750	* 1.5437	* 0.7521
	* 1.6381	* 1.3100	* 1.6089	* 1.2874	* 1.5617	* 1.4057	* 1.2753	* 2.3599
10	* 1.5220	* 1.1977	* 1.2879	* 1.3739	* 1.5635	* 1.3459	* 1.5365	* 0.6989
	* 1.2918	* 1.6122	* 1.4979	* 1.4169	* 1.2642	* 1.4286	* 1.2814	* 2.5084
11	* 1.2160	* 1.5273	* 1.3700	* 1.5591	* 1.3891	* 1.5858	* 1.5045	* 0.6524
	* 1.5865	* 1.2910	* 1.4206	* 1.2684	* 1.3836	* 1.2449	* 1.3075	* 2.7178
12	* 1.5303	* 1.2362	* 1.5615	* 1.3886	* 1.2946	* 1.5075	* 0.8940	*
	* 1.2868	* 1.5633	* 1.2657	* 1.3841	* 1.4899	* 1.3069	* 1.9730	*
13	* 1.2163	* 1.3741	* 1.3445	* 1.5848	* 1.5066	* 0.9425	* 0.5105	*
	* 1.5862	* 1.4064	* 1.4300	* 1.2456	* 1.3077	* 2.0757	* 3.4886	*
14	* 1.5187	* 1.5429	* 1.5356	* 1.5034	* 0.8928	* 0.4945	*	*
	* 1.2952	* 1.2759	* 1.2821	* 1.3084	* 1.9757	* 3.5663	*	*
15	* 0.7215	* 0.7520	* 0.6985	* 0.6519	* F-SUB-Q			
	* 2.4443	* 2.3602	* 2.5097	* 2.7200	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 49 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 250 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.8985	* 0.9641	* 1.2618	* 0.9922	* 1.2596	* 0.9854	* 1.2369	* 0.5916
	* 2.1499	* 1.9707	* 1.5335	* 1.9135	* 1.5383	* 1.9266	* 1.5653	* 2.9393
9	* 0.9641	* 1.2546	* 0.9824	* 1.2937	* 1.0171	* 1.1084	* 1.2536	* 0.6151
	* 1.9707	* 1.5412	* 1.9340	* 1.4993	* 1.8692	* 1.7160	* 1.5454	* 2.8446
10	* 1.2618	* 0.9808	* 1.0503	* 1.1275	* 1.3172	* 1.0982	* 1.2463	* 0.5697
	* 1.5335	* 1.9377	* 1.8073	* 1.6986	* 1.4752	* 1.7225	* 1.5547	* 3.0335
11	* 0.9922	* 1.2907	* 1.1245	* 1.3113	* 1.1358	* 1.2822	* 1.2089	* 0.5300
	* 1.9135	* 1.5027	* 1.7026	* 1.4827	* 1.6640	* 1.5142	* 1.6017	* 3.2986
12	* 1.2596	* 1.0162	* 1.3157	* 1.1355	* 1.0307	* 1.2248	* 0.7326	*
	* 1.5383	* 1.8710	* 1.4768	* 1.6647	* 1.8412	* 1.5830	* 2.3717	*
13	* 0.9854	* 1.1078	* 1.0971	* 1.2816	* 1.2242	* 0.7550	* 0.4192	*
	* 1.9266	* 1.7168	* 1.7240	* 1.5149	* 1.5837	* 2.5527	* 4.1913	*
14	* 1.2369	* 1.2531	* 1.2457	* 1.2082	* 0.7315	* 0.4063	*	*
	* 1.5653	* 1.5460	* 1.5555	* 1.6027	* 2.3752	* 4.2829	*	*
15	* 0.5916	* 0.6150	* 0.5693	* 0.5296	* F-SUB-Q			
	* 2.9393	* 2.8449	* 3.0354	* 3.3012	* M-SUB-Q			

AT 100% POWER, 250 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.4030	* 0.4324	* 0.5216	* 0.4465	* 0.5199	* 0.4270	* 0.4766	* 0.2553
	* 4.7433	* 4.3472	* 3.6685	* 4.2058	* 3.6872	* 4.3988	* 4.0202	* 6.7507
9	* 0.4324	* 0.5054	* 0.4414	* 0.5318	* 0.4589	* 0.4514	* 0.4814	* 0.2624
	* 4.3472	* 3.7846	* 4.2580	* 3.6073	* 4.0962	* 4.1651	* 3.9813	* 6.6098
10	* 0.5216	* 0.4407	* 0.4425	* 0.4874	* 0.5416	* 0.4580	* 0.4780	* 0.2472
	* 3.6684	* 4.2657	* 4.2404	* 3.8837	* 3.5477	* 4.0812	* 4.0107	* 6.9285
11	* 0.4465	* 0.5307	* 0.4862	* 0.5391	* 0.4759	* 0.5213	* 0.4588	* 0.2253
	* 4.2058	* 3.6148	* 3.8923	* 3.5653	* 3.9228	* 3.6829	* 4.1780	* 7.6934
12	* 0.5199	* 0.4585	* 0.5409	* 0.4757	* 0.4230	* 0.4707	* 0.3153	*
	* 3.6872	* 4.1006	* 3.5516	* 3.9247	* 4.4341	* 4.0764	* 5.4593	*
13	* 0.4270	* 0.4512	* 0.4576	* 0.5210	* 0.4704	* 0.3331	* 0.1815	*
	* 4.3988	* 4.1669	* 4.0845	* 3.6848	* 4.0785	* 5.7304	* 9.5977	*
14	* 0.4766	* 0.4812	* 0.4777	* 0.4584	* 0.3148	* 0.1786	*	*
	* 4.0202	* 3.9830	* 4.0128	* 4.1808	* 5.4676	* 9.6612	*	*
15	* 0.2553	* 0.2623	* 0.2471	* 0.2251	* F-SUB-Q			
	* 6.7507	* 6.6106	* 6.9318	* 7.6993	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 50 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 350 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.4382	* 0.4974	* 0.5823	* 0.5219	* 0.5869	* 0.4996	* 0.5267	* 0.3072
	* 3.7108	* 3.7734	* 3.3413	* 3.5081	* 3.2458	* 3.6247	* 3.5722	* 5.3063
9	* 0.4974	* 0.5635	* 0.5138	* 0.5931	* 0.5360	* 0.5142	* 0.5298	* 0.3153
	* 3.7734	* 3.4910	* 3.6342	* 3.2620	* 3.4523	* 3.5456	* 3.5686	* 5.3162
10	* 0.5823	* 0.5132	* 0.5225	* 0.5554	* 0.5954	* 0.5234	* 0.5257	* 0.2954
	* 3.3413	* 3.6396	* 3.5898	* 3.3971	* 3.2980	* 3.5506	* 3.6757	* 5.6082
11	* 0.5219	* 0.5924	* 0.5546	* 0.5912	* 0.5330	* 0.5657	* 0.5013	* 0.2729
	* 3.5081	* 3.2650	* 3.4018	* 3.2964	* 3.4291	* 3.4112	* 3.8899	* 6.4117
12	* 0.5869	* 0.5357	* 0.5949	* 0.5329	* 0.4479	* 0.4964	* 0.3609	*
	* 3.2458	* 3.4549	* 3.3006	* 3.4306	* 3.6596	* 3.6529	* 4.6474	*
13	* 0.4996	* 0.5140	* 0.5232	* 0.5655	* 0.4962	* 0.3658	* 0.2265	*
	* 3.6247	* 3.5464	* 3.5521	* 3.4123	* 3.6544	* 4.7187	* 7.3817	*
14	* 0.5267	* 0.5297	* 0.5256	* 0.5011	* 0.3605	* 0.2207	*	*
	* 3.5722	* 3.5691	* 3.6767	* 3.8917	* 4.6502	* 7.3858	*	*
15	* 0.3072	* 0.3153	* 0.2953	* 0.2727	* F-SUB-Q			
	* 5.3063	* 5.3166	* 5.6091	* 6.4147	* M-SUB-Q			

AT 100% POWER, 350 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9111	* 0.9829	* 1.1966	* 1.0209	* 1.2059	* 1.0057	* 1.1607	* 0.6469
	* 2.0294	* 1.9502	* 1.6610	* 1.8332	* 1.6152	* 1.8435	* 1.6585	* 2.5801
9	* 0.9829	* 1.1898	* 1.0068	* 1.2293	* 1.0463	* 1.0850	* 1.1691	* 0.6639
	* 1.9502	* 1.6804	* 1.8953	* 1.6073	* 1.8088	* 1.7124	* 1.6556	* 2.5873
10	* 1.1966	* 1.0057	* 1.0796	* 1.1138	* 1.2369	* 1.0957	* 1.1619	* 0.6183
	* 1.6610	* 1.8983	* 1.7769	* 1.7330	* 1.6160	* 1.7310	* 1.6991	* 2.7432
11	* 1.0209	* 1.2277	* 1.1122	* 1.2312	* 1.1181	* 1.1902	* 1.1237	* 0.5818
	* 1.8332	* 1.6090	* 1.7354	* 1.6085	* 1.6721	* 1.6529	* 1.7602	* 3.0741
12	* 1.2059	* 1.0457	* 1.2361	* 1.1177	* 1.0044	* 1.1325	* 0.7552	*
	* 1.6152	* 1.8101	* 1.6168	* 1.6728	* 1.7665	* 1.6802	* 2.2658	*
13	* 1.0057	* 1.0848	* 1.0953	* 1.1898	* 1.1321	* 0.7632	* 0.4803	*
	* 1.8435	* 1.7127	* 1.7317	* 1.6534	* 1.6808	* 2.3954	* 3.5668	*
14	* 1.1607	* 1.1689	* 1.1616	* 1.1233	* 0.7545	* 0.4677	*	*
	* 1.6585	* 1.6558	* 1.6995	* 1.7609	* 2.2673	* 3.5716	*	*
15	* 0.6469	* 0.6639	* 0.6181	* 0.5816	* F-SUB-Q			
	* 2.5801	* 2.5874	* 2.7436	* 3.0753	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 51 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 350 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1097	* 1.1699	* 1.4263	* 1.2133	* 1.4380	* 1.1948	* 1.3858	* 0.7782
	* 1.7681	* 1.6686	* 1.4134	* 1.5645	* 1.3725	* 1.5735	* 1.4067	* 2.1746
9	* 1.1699	* 1.3998	* 1.1943	* 1.4336	* 1.2369	* 1.2999	* 1.3986	* 0.8040
	* 1.6686	* 1.4502	* 1.6211	* 1.3957	* 1.5522	* 1.4479	* 1.4028	* 2.1635
10	* 1.4263	* 1.1929	* 1.2792	* 1.3167	* 1.4450	* 1.3047	* 1.3931	* 0.7524
	* 1.4134	* 1.6238	* 1.5207	* 1.4867	* 1.4013	* 1.4727	* 1.4349	* 2.2835
11	* 1.2133	* 1.4315	* 1.3147	* 1.4424	* 1.3347	* 1.4356	* 1.3565	* 0.7078
	* 1.5645	* 1.3972	* 1.4888	* 1.3946	* 1.4259	* 1.3929	* 1.4762	* 2.5605
12	* 1.4380	* 1.2363	* 1.4441	* 1.3342	* 1.2597	* 1.3747	* 0.9158	*
	* 1.3725	* 1.5533	* 1.4021	* 1.4265	* 1.4899	* 1.4257	* 1.9006	*
13	* 1.1948	* 1.2996	* 1.3042	* 1.4352	* 1.3742	* 0.9552	* 0.5792	*
	* 1.5735	* 1.4481	* 1.4732	* 1.3933	* 1.4263	* 1.9864	* 3.0191	*
14	* 1.3858	* 1.3984	* 1.3928	* 1.3560	* 0.9152	* 0.5676	*	*
	* 1.4067	* 1.4029	* 1.4352	* 1.4768	* 1.9012	* 3.0037	*	*
15	* 0.7782	* 0.8040	* 0.7522	* 0.7075	* F-SUB-Q			
	* 2.1746	* 2.1636	* 2.2838	* 2.5614	* M-SUB-Q			

AT 100% POWER, 350 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2053	* 1.2741	* 1.5967	* 1.3216	* 1.6047	* 1.2945	* 1.5526	* 0.8338
	* 1.6634	* 1.5583	* 1.2778	* 1.4534	* 1.2444	* 1.4689	* 1.2688	* 2.0521
9	* 1.2741	* 1.5683	* 1.2999	* 1.6069	* 1.3439	* 1.4229	* 1.5682	* 0.8619
	* 1.5583	* 1.3150	* 1.5077	* 1.2594	* 1.4454	* 1.3369	* 1.2648	* 2.0408
10	* 1.5967	* 1.2985	* 1.3897	* 1.4390	* 1.6231	* 1.4245	* 1.5626	* 0.8016
	* 1.2778	* 1.5104	* 1.4164	* 1.3763	* 1.2645	* 1.3674	* 1.2923	* 2.1666
11	* 1.3216	* 1.6045	* 1.4367	* 1.6189	* 1.4621	* 1.6097	* 1.5256	* 0.7582
	* 1.4534	* 1.2609	* 1.3783	* 1.2612	* 1.3220	* 1.2610	* 1.3303	* 2.4152
12	* 1.6047	* 1.3431	* 1.6220	* 1.4616	* 1.3794	* 1.5484	* 0.9808	*
	* 1.2444	* 1.4465	* 1.2653	* 1.3226	* 1.3883	* 1.2899	* 1.8039	*
13	* 1.2945	* 1.4227	* 1.4240	* 1.6093	* 1.5478	* 1.0440	* 0.6163	*
	* 1.4689	* 1.3371	* 1.3678	* 1.2613	* 1.2904	* 1.8570	* 2.8916	*
14	* 1.5526	* 1.5680	* 1.5623	* 1.5250	* 0.9798	* 0.6043	*	*
	* 1.2688	* 1.2649	* 1.2925	* 1.3308	* 1.8049	* 2.8755	*	*
15	* 0.8338	* 0.8619	* 0.8014	* 0.7579	* F-SUB-Q			
	* 2.0521	* 2.0409	* 2.1669	* 2.4161	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 52 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 350 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2351	* 1.3113	* 1.6640	* 1.3594	* 1.6655	* 1.3244	* 1.6144	* 0.8564
	* 1.6543	* 1.5399	* 1.2417	* 1.4320	* 1.2142	* 1.4539	* 1.2343	* 2.0229
9	* 1.3113	* 1.6332	* 1.3377	* 1.6782	* 1.3824	* 1.4622	* 1.6306	* 0.8882
	* 1.5399	* 1.2834	* 1.4842	* 1.2211	* 1.4246	* 1.3162	* 1.2302	* 2.0049
10	* 1.6640	* 1.3361	* 1.4251	* 1.4845	* 1.6967	* 1.4636	* 1.6248	* 0.8254
	* 1.2417	* 1.4870	* 1.3984	* 1.3501	* 1.2278	* 1.3495	* 1.2561	* 2.1290
11	* 1.3594	* 1.6756	* 1.4821	* 1.6939	* 1.5082	* 1.6730	* 1.5901	* 0.7811
	* 1.4320	* 1.2224	* 1.3522	* 1.2246	* 1.3031	* 1.2327	* 1.2959	* 2.3696
12	* 1.6655	* 1.3816	* 1.6956	* 1.5076	* 1.4174	* 1.6138	* 1.0129	*
	* 1.2142	* 1.4256	* 1.2286	* 1.3038	* 1.3759	* 1.2593	* 1.7767	*
13	* 1.3244	* 1.4620	* 1.4631	* 1.6726	* 1.6133	* 1.0802	* 0.6326	*
	* 1.4539	* 1.3164	* 1.3497	* 1.2330	* 1.2597	* 1.8291	* 2.8714	*
14	* 1.6144	* 1.6304	* 1.6245	* 1.5896	* 1.0125	* 0.6203	*	*
	* 1.2343	* 1.2303	* 1.2563	* 1.2963	* 1.7767	* 2.8557	*	*
15	* 0.8564	* 0.8882	* 0.8252	* 0.7808	* F-SUB-Q			
	* 2.0229	* 2.0050	* 2.1293	* 2.3704	* M-SUB-Q			

AT 100% POWER, 350 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2396	* 1.3202	* 1.6844	* 1.3677	* 1.6814	* 1.3268	* 1.6298	* 0.8627
	* 1.6716	* 1.5491	* 1.2434	* 1.4448	* 1.2201	* 1.4700	* 1.2390	* 2.0364
9	* 1.3202	* 1.6527	* 1.3466	* 1.7011	* 1.3908	* 1.4682	* 1.6463	* 0.8962
	* 1.5491	* 1.2838	* 1.4944	* 1.2212	* 1.4355	* 1.3285	* 1.2343	* 2.0149
10	* 1.6844	* 1.3450	* 1.4303	* 1.4966	* 1.7209	* 1.4690	* 1.6404	* 0.8352
	* 1.2434	* 1.4973	* 1.4113	* 1.3563	* 1.2259	* 1.3604	* 1.2585	* 2.1315
11	* 1.3677	* 1.6985	* 1.4944	* 1.7191	* 1.5200	* 1.6893	* 1.6075	* 0.7881
	* 1.4448	* 1.2228	* 1.3584	* 1.2238	* 1.3117	* 1.2384	* 1.2985	* 2.3743
12	* 1.6814	* 1.3900	* 1.7197	* 1.5195	* 1.4229	* 1.6310	* 1.0261	*
	* 1.2201	* 1.4365	* 1.2266	* 1.3123	* 1.3946	* 1.2688	* 1.7834	*
13	* 1.3268	* 1.4679	* 1.4685	* 1.6889	* 1.6304	* 1.0922	* 0.6386	*
	* 1.4700	* 1.3287	* 1.3605	* 1.2387	* 1.2692	* 1.8465	* 2.9031	*
14	* 1.6298	* 1.6461	* 1.6402	* 1.6070	* 1.0258	* 0.6258	*	*
	* 1.2390	* 1.2344	* 1.2587	* 1.2989	* 1.7832	* 2.8883	*	*
15	* 0.8627	* 0.8962	* 0.8350	* 0.7878	* F-SUB-Q			
	* 2.0364	* 2.0149	* 2.1318	* 2.3750	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 53 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 350 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2423	* 1.3247	* 1.7048	* 1.3725	* 1.6975	* 1.3274	* 1.6462	* 0.8577
	* 1.6870	* 1.5564	* 1.2475	* 1.4652	* 1.2295	* 1.4924	* 1.2468	* 2.0832
9	* 1.3247	* 1.6732	* 1.3521	* 1.7244	* 1.3944	* 1.4730	* 1.6630	* 0.8913
	* 1.5564	* 1.2784	* 1.5124	* 1.2236	* 1.4541	* 1.3456	* 1.2414	* 2.0600
10	* 1.7048	* 1.3505	* 1.4339	* 1.5056	* 1.7452	* 1.4729	* 1.6569	* 0.8276
	* 1.2475	* 1.5153	* 1.4254	* 1.3658	* 1.2191	* 1.3700	* 1.2626	* 2.1836
11	* 1.3725	* 1.7217	* 1.5033	* 1.7427	* 1.5276	* 1.7053	* 1.6248	* 0.7830
	* 1.4652	* 1.2253	* 1.3677	* 1.2209	* 1.3206	* 1.2414	* 1.2962	* 2.4141
12	* 1.6975	* 1.3936	* 1.7440	* 1.5271	* 1.4263	* 1.6478	* 1.0209	*
	* 1.2295	* 1.4552	* 1.2199	* 1.3212	* 1.4151	* 1.2762	* 1.8189	*
13	* 1.3274	* 1.4728	* 1.4723	* 1.7049	* 1.6473	* 1.0907	* 0.6334	*
	* 1.4924	* 1.3458	* 1.3704	* 1.2417	* 1.2766	* 1.8806	* 2.9777	*
14	* 1.6462	* 1.6628	* 1.6567	* 1.6244	* 1.0207	* 0.6200	*	*
	* 1.2468	* 1.2415	* 1.2628	* 1.2966	* 1.8185	* 2.9661	*	*
15	* 0.8577	* 0.8913	* 0.8274	* 0.7828	* F-SUB-Q			
	* 2.0832	* 2.0600	* 2.1839	* 2.4148	* M-SUB-Q			

AT 100% POWER, 350 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2381	* 1.3216	* 1.7091	* 1.3687	* 1.6984	* 1.3200	* 1.6468	* 0.8516
	* 1.7211	* 1.5880	* 1.2643	* 1.4993	* 1.2542	* 1.5296	* 1.2710	* 2.1408
9	* 1.3216	* 1.6780	* 1.3492	* 1.7303	* 1.3898	* 1.4678	* 1.6637	* 0.8855
	* 1.5880	* 1.2974	* 1.5410	* 1.2421	* 1.4855	* 1.3765	* 1.2646	* 2.1149
10	* 1.7091	* 1.3476	* 1.4286	* 1.5044	* 1.7514	* 1.4666	* 1.6575	* 0.8217
	* 1.2643	* 1.5439	* 1.4502	* 1.3847	* 1.2346	* 1.3962	* 1.2821	* 2.2386
11	* 1.3687	* 1.7276	* 1.5020	* 1.7483	* 1.5246	* 1.7054	* 1.6263	* 0.7774
	* 1.4993	* 1.2438	* 1.3866	* 1.2354	* 1.3430	* 1.2592	* 1.3143	* 2.4585
12	* 1.6984	* 1.3890	* 1.7502	* 1.5241	* 1.4202	* 1.6488	* 1.0158	*
	* 1.2542	* 1.4865	* 1.2354	* 1.3436	* 1.4393	* 1.2922	* 1.8515	*
13	* 1.3200	* 1.4675	* 1.4661	* 1.7050	* 1.6483	* 1.0862	* 0.6285	*
	* 1.5296	* 1.3767	* 1.3964	* 1.2594	* 1.2927	* 1.9172	* 3.0391	*
14	* 1.6468	* 1.6635	* 1.6572	* 1.6259	* 1.0157	* 0.6146	*	*
	* 1.2710	* 1.2647	* 1.2823	* 1.3147	* 1.8510	* 3.0302	*	*
15	* 0.8516	* 0.8855	* 0.8215	* 0.7772	* F-SUB-Q			
	* 2.1408	* 2.1149	* 2.2389	* 2.4592	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 54 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 350 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2361	* 1.3197	* 1.7169	* 1.3660	* 1.7028	* 1.3146	* 1.6507	* 0.8438
	* 1.7733	* 1.6222	* 1.2856	* 1.5394	* 1.2822	* 1.5724	* 1.2987	* 2.2132
9	* 1.3197	* 1.6866	* 1.3476	* 1.7393	* 1.3861	* 1.4650	* 1.6676	* 0.8759
	* 1.6222	* 1.3158	* 1.5764	* 1.2637	* 1.5213	* 1.4117	* 1.2913	* 2.1897
10	* 1.7169	* 1.3459	* 1.4256	* 1.5041	* 1.7602	* 1.4621	* 1.6612	* 0.8118
	* 1.2856	* 1.5794	* 1.4818	* 1.4120	* 1.2510	* 1.4262	* 1.3043	* 2.3153
11	* 1.3660	* 1.7365	* 1.5017	* 1.7564	* 1.5226	* 1.7084	* 1.6303	* 0.7684
	* 1.5394	* 1.2654	* 1.4141	* 1.2587	* 1.3771	* 1.2865	* 1.3361	* 2.5299
12	* 1.7028	* 1.3853	* 1.7590	* 1.5222	* 1.4161	* 1.6528	* 1.0072	*
	* 1.2822	* 1.5223	* 1.2518	* 1.3777	* 1.4802	* 1.3193	* 1.9099	*
13	* 1.3146	* 1.4647	* 1.4615	* 1.7081	* 1.6523	* 1.0798	* 0.6221	*
	* 1.5724	* 1.4120	* 1.4264	* 1.2867	* 1.3197	* 1.9741	* 3.1389	*
14	* 1.6507	* 1.6674	* 1.6610	* 1.6299	* 1.0064	* 0.6077	*	*
	* 1.2987	* 1.2914	* 1.3044	* 1.3364	* 1.9108	* 3.1332	*	*
15	* 0.8438	* 0.8759	* 0.8116	* 0.7682	* F-SUB-Q			
	* 2.2132	* 2.1898	* 2.3156	* 2.5308	* M-SUB-Q			

AT 100% POWER, 350 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2245	* 1.3073	* 1.6949	* 1.3502	* 1.6785	* 1.2966	* 1.6257	* 0.8440
	* 1.8339	* 1.6798	* 1.3396	* 1.6042	* 1.3400	* 1.6407	* 1.3572	* 2.2800
9	* 1.3073	* 1.6649	* 1.3335	* 1.7163	* 1.3712	* 1.4458	* 1.6421	* 0.8776
	* 1.6798	* 1.3673	* 1.6387	* 1.3165	* 1.5804	* 1.4710	* 1.3478	* 2.2486
10	* 1.6949	* 1.3322	* 1.4087	* 1.4891	* 1.7363	* 1.4420	* 1.6360	* 0.8174
	* 1.3396	* 1.6416	* 1.5402	* 1.4646	* 1.2991	* 1.4823	* 1.3578	* 2.3609
11	* 1.3502	* 1.7135	* 1.4867	* 1.7352	* 1.5056	* 1.6830	* 1.6060	* 0.7699
	* 1.6042	* 1.3186	* 1.4667	* 1.3024	* 1.4237	* 1.3345	* 1.3862	* 2.5862
12	* 1.6785	* 1.3702	* 1.7351	* 1.5052	* 1.3964	* 1.6281	* 1.0126	*
	* 1.3400	* 1.5814	* 1.3000	* 1.4242	* 1.5434	* 1.3777	* 1.9448	*
13	* 1.2966	* 1.4455	* 1.4414	* 1.6826	* 1.6276	* 1.0778	* 0.6237	*
	* 1.6407	* 1.4712	* 1.4829	* 1.3347	* 1.3781	* 2.0397	* 3.2168	*
14	* 1.6257	* 1.6420	* 1.6358	* 1.6056	* 1.0124	* 0.6096	*	*
	* 1.3572	* 1.3479	* 1.3579	* 1.3865	* 1.9444	* 3.2090	*	*
15	* 0.8440	* 0.8776	* 0.8172	* 0.7697	* F-SUB-Q			
	* 2.2800	* 2.2487	* 2.3612	* 2.5870	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 55 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 350 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2280	* 1.3130	* 1.7194	* 1.3564	* 1.6991	* 1.3010	* 1.6462	* 0.8332
	* 1.8889	* 1.7308	* 1.3662	* 1.6538	* 1.3712	* 1.6922	* 1.3866	* 2.3862
9	* 1.3130	* 1.6906	* 1.3399	* 1.7426	* 1.3749	* 1.4536	* 1.6624	* 0.8669
	* 1.7308	* 1.3931	* 1.6872	* 1.3407	* 1.6286	* 1.5131	* 1.3753	* 2.3537
10	* 1.7194	* 1.3382	* 1.4144	* 1.4982	* 1.7618	* 1.4474	* 1.6563	* 0.8034
	* 1.3662	* 1.6905	* 1.5862	* 1.5052	* 1.3221	* 1.5232	* 1.3830	* 2.4794
11	* 1.3564	* 1.7398	* 1.4958	* 1.7586	* 1.5131	* 1.7022	* 1.6265	* 0.7596
	* 1.6538	* 1.3428	* 1.5074	* 1.3258	* 1.4610	* 1.3598	* 1.4106	* 2.7010
12	* 1.6991	* 1.3743	* 1.7606	* 1.5128	* 1.4022	* 1.6486	* 0.9988	*
	* 1.3712	* 1.6295	* 1.3229	* 1.4614	* 1.5808	* 1.3976	* 2.0277	*
13	* 1.3010	* 1.4533	* 1.4468	* 1.7019	* 1.6481	* 1.0711	* 0.6142	*
	* 1.6922	* 1.5134	* 1.5237	* 1.3600	* 1.3980	* 2.1056	* 3.3493	*
14	* 1.6462	* 1.6623	* 1.6561	* 1.6261	* 0.9985	* 0.5991	*	*
	* 1.3866	* 1.3754	* 1.3832	* 1.4109	* 2.0276	* 3.3483	*	*
15	* 0.8332	* 0.8669	* 0.8032	* 0.7593	* F-SUB-Q			
	* 2.3862	* 2.3537	* 2.4797	* 2.7019	* M-SUB-Q			

AT 100% POWER, 350 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2271	* 1.3128	* 1.7246	* 1.3550	* 1.7013	* 1.2978	* 1.6474	* 0.8302
	* 1.9394	* 1.7737	* 1.4062	* 1.7099	* 1.4245	* 1.7637	* 1.4400	* 2.4872
9	* 1.3128	* 1.6963	* 1.3393	* 1.7474	* 1.3724	* 1.4516	* 1.6635	* 0.8650
	* 1.7737	* 1.4317	* 1.7346	* 1.3900	* 1.6948	* 1.5744	* 1.4268	* 2.4497
10	* 1.7246	* 1.3376	* 1.4122	* 1.4984	* 1.7658	* 1.4437	* 1.6574	* 0.8012
	* 1.4062	* 1.7375	* 1.6423	* 1.5629	* 1.3696	* 1.5848	* 1.4332	* 2.5787
11	* 1.3550	* 1.7446	* 1.4960	* 1.7623	* 1.5115	* 1.7031	* 1.6281	* 0.7571
	* 1.7099	* 1.3922	* 1.5652	* 1.3739	* 1.5183	* 1.4103	* 1.4610	* 2.8045
12	* 1.7013	* 1.3718	* 1.7647	* 1.5112	* 1.3987	* 1.6500	* 0.9973	*
	* 1.4245	* 1.6958	* 1.3704	* 1.5187	* 1.6430	* 1.4466	* 2.1040	*
13	* 1.2978	* 1.4512	* 1.4431	* 1.7028	* 1.6495	* 1.0694	* 0.6119	*
	* 1.7637	* 1.5747	* 1.5854	* 1.4105	* 1.4470	* 2.1826	* 3.4764	*
14	* 1.6474	* 1.6633	* 1.6572	* 1.6278	* 0.9972	* 0.5965	*	*
	* 1.4400	* 1.4269	* 1.4333	* 1.4613	* 2.1033	* 3.4775	*	*
15	* 0.8302	* 0.8650	* 0.8010	* 0.7568	* F-SUB-Q			
	* 2.4872	* 2.4497	* 2.5789	* 2.8053	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 56 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 350 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2246	* 1.3079	* 1.7137	* 1.3478	* 1.6882	* 1.2888	* 1.6339	* 0.8339 *
	* 1.8920	* 1.7356	* 1.3798	* 1.6755	* 1.3991	* 1.7503	* 1.4445	* 2.4635 *
9	* 1.3079	* 1.6856	* 1.3336	* 1.7352	* 1.3701	* 1.4421	* 1.6497	* 0.8681 *
	* 1.7356	* 1.4051	* 1.6982	* 1.3664	* 1.6573	* 1.5682	* 1.4349	* 2.4275 *
10	* 1.7137	* 1.3322	* 1.4032	* 1.4916	* 1.7529	* 1.4331	* 1.6436	* 0.8077 *
	* 1.3798	* 1.7006	* 1.6115	* 1.5325	* 1.3605	* 1.5741	* 1.4437	* 2.5486 *
11	* 1.3478	* 1.7323	* 1.4891	* 1.7517	* 1.5029	* 1.6890	* 1.6151	* 0.7597 *
	* 1.6755	* 1.3686	* 1.5347	* 1.3642	* 1.5059	* 1.4161	* 1.4762	* 2.7944 *
12	* 1.6882	* 1.3689	* 1.7518	* 1.5027	* 1.3876	* 1.6363	* 1.0053	*
	* 1.3991	* 1.6590	* 1.3613	* 1.5063	* 1.6501	* 1.4681	* 2.0900	*
13	* 1.2888	* 1.4417	* 1.4325	* 1.6888	* 1.6358	* 1.0717	* 0.6151	*
	* 1.7503	* 1.5685	* 1.5746	* 1.4162	* 1.4684	* 2.1905	* 3.4808	*
14	* 1.6339	* 1.6496	* 1.6435	* 1.6148	* 1.0053	* 0.5999	*	*
	* 1.4445	* 1.4350	* 1.4438	* 1.4764	* 2.0894	* 3.4798	*	*
15	* 0.8339	* 0.8681	* 0.8076	* 0.7595	* F-SUB-Q			
	* 2.4635	* 2.4275	* 2.5488	* 2.7952	* M-SUB-Q			

AT 100% POWER, 350 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2310	* 1.3190	* 1.7445	* 1.3603	* 1.7149	* 1.2985	* 1.6607	* 0.8266 *
	* 1.8451	* 1.6849	* 1.3269	* 1.6254	* 1.3482	* 1.7000	* 1.3906	* 2.4296 *
9	* 1.3190	* 1.7173	* 1.3448	* 1.7677	* 1.3739	* 1.4557	* 1.6768	* 0.8611 *
	* 1.6849	* 1.3501	* 1.6485	* 1.3125	* 1.6147	* 1.5200	* 1.3807	* 2.3941 *
10	* 1.7445	* 1.3434	* 1.4141	* 1.5065	* 1.7847	* 1.4438	* 1.6708	* 0.7976 *
	* 1.3269	* 1.6512	* 1.5648	* 1.4845	* 1.3066	* 1.5280	* 1.3884	* 2.5241 *
11	* 1.3603	* 1.7647	* 1.5039	* 1.7811	* 1.5160	* 1.7149	* 1.6425	* 0.7528 *
	* 1.6254	* 1.3147	* 1.4867	* 1.3116	* 1.4592	* 1.3623	* 1.4176	* 2.7556 *
12	* 1.7149	* 1.3733	* 1.7835	* 1.5158	* 1.3990	* 1.6635	* 0.9965	*
	* 1.3482	* 1.6156	* 1.3073	* 1.4595	* 1.5986	* 1.4098	* 2.0581	*
13	* 1.2985	* 1.4553	* 1.4432	* 1.7147	* 1.6631	* 1.0699	* 0.6083	*
	* 1.7000	* 1.5203	* 1.5284	* 1.3625	* 1.4101	* 2.1404	* 3.4323	*
14	* 1.6607	* 1.6767	* 1.6707	* 1.6422	* 0.9963	* 0.5921	*	*
	* 1.3906	* 1.3808	* 1.3885	* 1.4178	* 2.0577	* 3.4381	*	*
15	* 0.8266	* 0.8611	* 0.7975	* 0.7526	* F-SUB-Q			
	* 2.4296	* 2.3941	* 2.5244	* 2.7565	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 57 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 350 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2377	* 1.3274	* 1.7629	* 1.3686	* 1.7300	* 1.3045	* 1.6756	* 0.8266
	* 1.7738	* 1.6180	* 1.2713	* 1.5618	* 1.2938	* 1.6352	* 1.3339	* 2.3423
9	* 1.3274	* 1.7361	* 1.3532	* 1.7866	* 1.3801	* 1.4643	* 1.6919	* 0.8598
	* 1.6180	* 1.2930	* 1.5835	* 1.2587	* 1.5549	* 1.4619	* 1.3251	* 2.3115
10	* 1.7629	* 1.3516	* 1.4207	* 1.5169	* 1.8029	* 1.4503	* 1.6859	* 0.7956
	* 1.2713	* 1.5861	* 1.5063	* 1.4280	* 1.2549	* 1.4726	* 1.3326	* 2.4391
11	* 1.3686	* 1.7835	* 1.5143	* 1.7984	* 1.5247	* 1.7293	* 1.6580	* 0.7507
	* 1.5618	* 1.2607	* 1.4301	* 1.2607	* 1.4067	* 1.3103	* 1.3603	* 2.6622
12	* 1.7300	* 1.3796	* 1.8018	* 1.5246	* 1.4052	* 1.6786	* 0.9975	*
	* 1.2938	* 1.5557	* 1.2556	* 1.4069	* 1.5435	* 1.3550	* 1.9867	*
13	* 1.3045	* 1.4639	* 1.4497	* 1.7292	* 1.6781	* 1.0731	* 0.6073	*
	* 1.6352	* 1.4622	* 1.4730	* 1.3104	* 1.3553	* 2.0637	* 3.3076	*
14	* 1.6756	* 1.6918	* 1.6858	* 1.6578	* 0.9971	* 0.5906	*	*
	* 1.3339	* 1.3251	* 1.3327	* 1.3604	* 1.9868	* 3.3162	*	*
15	* 0.8266	* 0.8598	* 0.7954	* 0.7505	* F-SUB-Q			
	* 2.3423	* 2.3115	* 2.4393	* 2.6630	* M-SUB-Q			

AT 100% POWER, 350 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2438	* 1.3347	* 1.7761	* 1.3753	* 1.7409	* 1.3097	* 1.6859	* 0.8305
	* 1.7088	* 1.5574	* 1.2210	* 1.5042	* 1.2439	* 1.5758	* 1.2818	* 2.2547
9	* 1.3347	* 1.7495	* 1.3605	* 1.7995	* 1.3863	* 1.4715	* 1.7022	* 0.8667
	* 1.5574	* 1.2415	* 1.5248	* 1.2088	* 1.4977	* 1.4067	* 1.2729	* 2.2175
10	* 1.7761	* 1.3590	* 1.4269	* 1.5258	* 1.8152	* 1.4555	* 1.6961	* 0.8023
	* 1.2210	* 1.5270	* 1.4511	* 1.3730	* 1.2047	* 1.4180	* 1.2799	* 2.3382
11	* 1.3753	* 1.7964	* 1.5232	* 1.8117	* 1.5322	* 1.7394	* 1.6684	* 0.7568
	* 1.5042	* 1.2108	* 1.3750	* 1.2095	* 1.3528	* 1.2580	* 1.3051	* 2.5518
12	* 1.7409	* 1.3854	* 1.8141	* 1.5322	* 1.4102	* 1.6887	* 1.0055	*
	* 1.2439	* 1.4985	* 1.2054	* 1.3530	* 1.4859	* 1.2998	* 1.9029	*
13	* 1.3097	* 1.4711	* 1.4549	* 1.7393	* 1.6883	* 1.0797	* 0.6104	*
	* 1.5758	* 1.4070	* 1.4185	* 1.2581	* 1.3001	* 1.9794	* 3.1764	*
14	* 1.6859	* 1.7021	* 1.6960	* 1.6682	* 1.0054	* 0.5935	*	*
	* 1.2818	* 1.2730	* 1.2799	* 1.3052	* 1.9023	* 3.1853	*	*
15	* 0.8305	* 0.8667	* 0.8022	* 0.7565	* F-SUB-Q			
	* 2.2547	* 2.2176	* 2.3383	* 2.5525	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 58 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 350 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2534	* 1.3402	* 1.7789	* 1.3795	* 1.7426	* 1.3134	* 1.6868	* 0.8415
	* 1.7765	* 1.6281	* 1.2793	* 1.5749	* 1.3041	* 1.6485	* 1.3432	* 2.3356
9	* 1.3402	* 1.7517	* 1.3659	* 1.8007	* 1.4020	* 1.4751	* 1.7030	* 0.8775
	* 1.6281	* 1.3010	* 1.5945	* 1.2673	* 1.5570	* 1.4717	* 1.3335	* 2.2976
10	* 1.7789	* 1.3644	* 1.4318	* 1.5315	* 1.8165	* 1.4584	* 1.6969	* 0.8154
	* 1.2793	* 1.5968	* 1.5196	* 1.4348	* 1.2618	* 1.4837	* 1.3405	* 2.4122
11	* 1.3795	* 1.7975	* 1.5288	* 1.8145	* 1.5366	* 1.7409	* 1.6700	* 0.7657
	* 1.5749	* 1.2695	* 1.4370	* 1.2655	* 1.4135	* 1.3162	* 1.3650	* 2.6430
12	* 1.7426	* 1.4008	* 1.8154	* 1.5365	* 1.4117	* 1.6894	* 1.0213	*
	* 1.3041	* 1.5586	* 1.2625	* 1.4137	* 1.5539	* 1.3587	* 1.9608	*
13	* 1.3134	* 1.4747	* 1.4578	* 1.7408	* 1.6890	* 1.0906	* 0.6181	*
	* 1.6485	* 1.4721	* 1.4842	* 1.3162	* 1.3590	* 2.0499	* 3.2830	*
14	* 1.6868	* 1.7029	* 1.6968	* 1.6698	* 1.0214	* 0.6013	*	*
	* 1.3432	* 1.3336	* 1.3406	* 1.3651	* 1.9599	* 3.2902	*	*
15	* 0.8415	* 0.8775	* 0.8153	* 0.7654	* F-SUB-Q			
	* 2.3356	* 2.2977	* 2.4124	* 2.6437	* M-SUB-Q			

AT 100% POWER, 350 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2651	* 1.3590	* 1.8224	* 1.3999	* 1.7831	* 1.3325	* 1.7283	* 0.8380
	* 1.7083	* 1.5596	* 1.2135	* 1.5087	* 1.2395	* 1.5824	* 1.2764	* 2.2852
9	* 1.3590	* 1.7958	* 1.3848	* 1.8466	* 1.4086	* 1.5010	* 1.7453	* 0.8733
	* 1.5596	* 1.2323	* 1.5288	* 1.2011	* 1.5041	* 1.4080	* 1.2665	* 2.2508
10	* 1.8224	* 1.3833	* 1.4504	* 1.5568	* 1.8624	* 1.4803	* 1.7391	* 0.8077
	* 1.2135	* 1.5311	* 1.4564	* 1.3720	* 1.1956	* 1.4216	* 1.2726	* 2.3733
11	* 1.3999	* 1.8433	* 1.5540	* 1.8574	* 1.5608	* 1.7819	* 1.7116	* 0.7609
	* 1.5087	* 1.2032	* 1.3742	* 1.2005	* 1.3515	* 1.2489	* 1.2946	* 2.5906
12	* 1.7831	* 1.4078	* 1.8612	* 1.5608	* 1.4337	* 1.7310	* 1.0169	*
	* 1.2395	* 1.5049	* 1.1963	* 1.3517	* 1.4830	* 1.2872	* 1.9141	*
13	* 1.3325	* 1.5006	* 1.4796	* 1.7819	* 1.7306	* 1.0947	* 0.6138	*
	* 1.5824	* 1.4084	* 1.4222	* 1.2490	* 1.2874	* 1.9823	* 3.2157	*
14	* 1.7283	* 1.7452	* 1.7391	* 1.7115	* 1.0166	* 0.5959	*	*
	* 1.2764	* 1.2665	* 1.2726	* 1.2947	* 1.9139	* 3.2297	*	*
15	* 0.8380	* 0.8733	* 0.8075	* 0.7606	* F-SUB-Q			
	* 2.2852	* 2.2508	* 2.3735	* 2.5914	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 59 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 350 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2722	* 1.3668	* 1.8371	* 1.4076	* 1.7973	* 1.3416	* 1.7442	* 0.8411
	* 1.6382	* 1.4990	* 1.1635	* 1.4512	* 1.1888	* 1.5199	* 1.2223	* 2.2025
9	* 1.3668	* 1.8105	* 1.3925	* 1.8611	* 1.4170	* 1.5133	* 1.7616	* 0.8768
	* 1.4990	* 1.1809	* 1.4703	* 1.1518	* 1.4465	* 1.3501	* 1.2122	* 2.1683
10	* 1.8371	* 1.3910	* 1.4588	* 1.5679	* 1.8779	* 1.4903	* 1.7553	* 0.8108
	* 1.1635	* 1.4725	* 1.4001	* 1.3167	* 1.1450	* 1.3645	* 1.2178	* 2.2860
11	* 1.4076	* 1.8576	* 1.5649	* 1.8725	* 1.5716	* 1.7979	* 1.7277	* 0.7635
	* 1.4512	* 1.1539	* 1.3188	* 1.1497	* 1.2959	* 1.1943	* 1.2377	* 2.4956
12	* 1.7973	* 1.4157	* 1.8766	* 1.5716	* 1.4426	* 1.7463	* 1.0224	*
	* 1.1888	* 1.4472	* 1.1457	* 1.2961	* 1.4192	* 1.2292	* 1.8370	*
13	* 1.3416	* 1.5128	* 1.4896	* 1.7978	* 1.7458	* 1.1004	* 0.6149	*
	* 1.5199	* 1.3505	* 1.3651	* 1.1943	* 1.2295	* 1.9001	* 3.1011	*
14	* 1.7442	* 1.7615	* 1.7552	* 1.7276	* 1.0221	* 0.5967	*	*
	* 1.2223	* 1.2122	* 1.2179	* 1.2378	* 1.8368	* 3.1158	*	*
15	* 0.8411	* 0.8768	* 0.8107	* 0.7632	* F-SUB-Q			
	* 2.2025	* 2.1684	* 2.2862	* 2.4964	* M-SUB-Q			

AT 100% POWER, 350 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2693	* 1.3555	* 1.8074	* 1.3942	* 1.7703	* 1.3328	* 1.7195	* 0.8473
	* 1.5961	* 1.4688	* 1.1489	* 1.4244	* 1.1728	* 1.4870	* 1.2042	* 2.1267
9	* 1.3555	* 1.7803	* 1.3808	* 1.8275	* 1.4197	* 1.5027	* 1.7375	* 0.8846
	* 1.4688	* 1.1663	* 1.4414	* 1.1393	* 1.4039	* 1.3210	* 1.1932	* 2.0897
10	* 1.8074	* 1.3793	* 1.4508	* 1.5545	* 1.8455	* 1.4793	* 1.7310	* 0.8216
	* 1.1489	* 1.4435	* 1.3695	* 1.2900	* 1.1308	* 1.3353	* 1.1987	* 2.1928
11	* 1.3942	* 1.8240	* 1.5515	* 1.8433	* 1.5590	* 1.7743	* 1.7023	* 0.7701
	* 1.4244	* 1.1414	* 1.2922	* 1.1332	* 1.2679	* 1.1737	* 1.2183	* 2.4036
12	* 1.7703	* 1.4183	* 1.8441	* 1.5590	* 1.4298	* 1.7201	* 1.0339	*
	* 1.1728	* 1.4055	* 1.1317	* 1.2680	* 1.3888	* 1.2093	* 1.7625	*
13	* 1.3328	* 1.5021	* 1.4785	* 1.7742	* 1.7197	* 1.1020	* 0.6194	*
	* 1.4870	* 1.3214	* 1.3359	* 1.1737	* 1.2095	* 1.8395	* 2.9884	*
14	* 1.7195	* 1.7373	* 1.7308	* 1.7020	* 1.0338	* 0.6016	*	*
	* 1.2042	* 1.1933	* 1.1988	* 1.2185	* 1.7618	* 3.0003	*	*
15	* 0.8473	* 0.8845	* 0.8214	* 0.7698	* F-SUB-Q			
	* 2.1267	* 2.0898	* 2.1930	* 2.4044	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 60 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 350 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2476	* 1.3362	* 1.7855	* 1.3741	* 1.7517	* 1.3189	* 1.7043	* 0.8225
	* 1.5853	* 1.4553	* 1.1354	* 1.4116	* 1.1571	* 1.4674	* 1.1856	* 2.1398
9	* 1.3362	* 1.7600	* 1.3604	* 1.8047	* 1.3858	* 1.4911	* 1.7231	* 0.8588
	* 1.4553	* 1.1516	* 1.4289	* 1.1260	* 1.4029	* 1.2996	* 1.1739	* 2.1027
10	* 1.7855	* 1.3589	* 1.4331	* 1.5359	* 1.8234	* 1.4656	* 1.7162	* 0.7948
	* 1.1354	* 1.4311	* 1.3529	* 1.2745	* 1.1165	* 1.3154	* 1.1794	* 2.2142
11	* 1.3741	* 1.8011	* 1.5328	* 1.8189	* 1.5419	* 1.7596	* 1.6852	* 0.7470
	* 1.4116	* 1.1282	* 1.2768	* 1.1201	* 1.2508	* 1.1540	* 1.1999	* 2.4197
12	* 1.7517	* 1.3853	* 1.8221	* 1.5418	* 1.4171	* 1.7030	* 1.0032	*
	* 1.1571	* 1.4037	* 1.1173	* 1.2510	* 1.3669	* 1.1904	* 1.7718	*
13	* 1.3189	* 1.4906	* 1.4648	* 1.7594	* 1.7025	* 1.0747	* 0.5995	*
	* 1.4674	* 1.3000	* 1.3160	* 1.1541	* 1.1907	* 1.8394	* 3.0146	*
14	* 1.7043	* 1.7229	* 1.7161	* 1.6849	* 1.0024	* 0.5817	*	
	* 1.1856	* 1.1740	* 1.1795	* 1.2001	* 1.7725	* 3.0295	*	
15	* 0.8225	* 0.8588	* 0.7946	* 0.7467	* F-SUB-Q			
	* 2.1398	* 2.1028	* 2.2144	* 2.4207	* M-SUB-Q			

AT 100% POWER, 350 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1752	* 1.2543	* 1.6506	* 1.2893	* 1.6252	* 1.2430	* 1.5806	* 0.7711
	* 1.6515	* 1.5208	* 1.2041	* 1.4759	* 1.2226	* 1.5279	* 1.2530	* 2.2399
9	* 1.2543	* 1.6285	* 1.2777	* 1.6695	* 1.3036	* 1.4011	* 1.5988	* 0.8028
	* 1.5208	* 1.2199	* 1.4926	* 1.1929	* 1.4627	* 1.3563	* 1.2398	* 2.2076
10	* 1.6506	* 1.2760	* 1.3515	* 1.4444	* 1.6889	* 1.3826	* 1.5915	* 0.7437
	* 1.2041	* 1.4952	* 1.4071	* 1.3289	* 1.1810	* 1.3672	* 1.2459	* 2.3219
11	* 1.2893	* 1.6661	* 1.4413	* 1.6849	* 1.4491	* 1.6351	* 1.5581	* 0.6972
	* 1.4759	* 1.1954	* 1.3315	* 1.1847	* 1.3044	* 1.2166	* 1.2713	* 2.5441
12	* 1.6252	* 1.3031	* 1.6875	* 1.4490	* 1.3343	* 1.5765	* 0.9409	*
	* 1.2226	* 1.4636	* 1.1819	* 1.3046	* 1.4230	* 1.2593	* 1.8517	*
13	* 1.2430	* 1.4005	* 1.3818	* 1.6349	* 1.5760	* 1.0009	* 0.5618	*
	* 1.5279	* 1.3567	* 1.3679	* 1.2167	* 1.2596	* 1.9361	* 3.1571	*
14	* 1.5806	* 1.5986	* 1.5913	* 1.5577	* 0.9400	* 0.5448	*	
	* 1.2530	* 1.2399	* 1.2461	* 1.2716	* 1.8530	* 3.1746	*	
15	* 0.7711	* 0.8028	* 0.7435	* 0.6969	* F-SUB-Q			
	* 2.2399	* 2.2076	* 2.3222	* 2.5451	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 61 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 350 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9789	* 1.0453	* 1.3564	* 1.0713	* 1.3360	* 1.0348	* 1.2934	* 0.6409 *
	* 1.9524	* 1.7962	* 1.4414	* 1.7481	* 1.4633	* 1.8061	* 1.5062	* 2.6561 *
9	* 1.0453	* 1.3555	* 1.0653	* 1.3973	* 1.0914	* 1.1591	* 1.3073	* 0.6646 *
	* 1.7962	* 1.4415	* 1.7619	* 1.4016	* 1.7187	* 1.6138	* 1.4912	* 2.6272 *
10	* 1.3564	* 1.0640	* 1.1305	* 1.2090	* 1.4125	* 1.1560	* 1.3003	* 0.6164 *
	* 1.4414	* 1.7648	* 1.6555	* 1.5617	* 1.3881	* 1.6093	* 1.4995	* 2.7597 *
11	* 1.0713	* 1.3948	* 1.2065	* 1.4086	* 1.2092	* 1.3360	* 1.2671	* 0.5757 *
	* 1.7481	* 1.4039	* 1.5646	* 1.3928	* 1.5372	* 1.4643	* 1.5381	* 3.0363 *
12	* 1.3360	* 1.0910	* 1.4115	* 1.2091	* 1.0935	* 1.2899	* 0.7820 *	
	* 1.4633	* 1.7196	* 1.3890	* 1.5375	* 1.7085	* 1.5135	* 2.1937 *	
13	* 1.0348	* 1.1586	* 1.1553	* 1.3358	* 1.2896	* 0.8144	* 0.4689 *	
	* 1.8061	* 1.6142	* 1.6101	* 1.4644	* 1.5139	* 2.3426	* 3.7298 *	
14	* 1.2934	* 1.3071	* 1.3001	* 1.2668	* 0.7811	* 0.4550 *		
	* 1.5062	* 1.4913	* 1.4997	* 1.5384	* 2.1955	* 3.7476 *		
15	* 0.6409	* 0.6646	* 0.6162	* 0.5755	* F-SUB-Q			
	* 2.6561	* 2.6272	* 2.7603	* 3.0375	* M-SUB-Q			

AT 100% POWER, 350 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.4600	* 0.4897	* 0.5873	* 0.5030	* 0.5799	* 0.4731	* 0.5262	* 0.2879 *
	* 4.1047	* 3.7872	* 3.2862	* 3.6762	* 3.3289	* 3.9047	* 3.6577	* 5.8508 *
9	* 0.4897	* 0.5713	* 0.4994	* 0.5968	* 0.5137	* 0.4979	* 0.5307	* 0.2954 *
	* 3.7872	* 3.3776	* 3.7111	* 3.2389	* 3.6048	* 3.7074	* 3.6286	* 5.8499 *
10	* 0.5873	* 0.4988	* 0.4994	* 0.5465	* 0.6033	* 0.5064	* 0.5272	* 0.2784 *
	* 3.2862	* 3.7171	* 3.6989	* 3.4090	* 3.2068	* 3.6234	* 3.6529	* 6.0465 *
11	* 0.5030	* 0.5958	* 0.5454	* 0.6017	* 0.5297	* 0.5740	* 0.5085	* 0.2552 *
	* 3.6762	* 3.2440	* 3.4150	* 3.2168	* 3.4619	* 3.3635	* 3.7866	* 6.7805 *
12	* 0.5799	* 0.5134	* 0.6028	* 0.5296	* 0.4715	* 0.5235	* 0.3513 *	
	* 3.3289	* 3.6072	* 3.2090	* 3.4628	* 3.9100	* 3.6832	* 4.8283 *	
13	* 0.4731	* 0.4978	* 0.5061	* 0.5739	* 0.5234	* 0.3745	* 0.2110 *	
	* 3.9047	* 3.7083	* 3.6254	* 3.3641	* 3.6843	* 5.0358	* 8.2068 *	
14	* 0.5262	* 0.5306	* 0.5271	* 0.5083	* 0.3509	* 0.2077 *		
	* 3.6577	* 3.6291	* 3.6535	* 3.7878	* 4.8326	* 8.1322 *		
15	* 0.2879	* 0.2954	* 0.2784	* 0.2551	* F-SUB-Q			
	* 5.8508	* 5.8500	* 6.0469	* 6.7832	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 62 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 500 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.5291	* 0.6043	* 0.7029	* 0.6313	* 0.7071	* 0.6074	* 0.6439	* 0.3901
	* 2.9015	* 3.0442	* 2.8006	* 2.8359	* 2.7287	* 2.9193	* 2.9635	* 3.9882
9	* 0.6043	* 0.6833	* 0.6230	* 0.7141	* 0.6471	* 0.6245	* 0.6471	* 0.3986
	* 3.0442	* 2.9265	* 2.9301	* 2.7411	* 2.8005	* 2.8499	* 2.9643	* 4.0421
10	* 0.7029	* 0.6225	* 0.6351	* 0.6699	* 0.7164	* 0.6348	* 0.6433	* 0.3751
	* 2.8006	* 2.9331	* 2.8822	* 2.7491	* 2.7716	* 2.8547	* 3.0413	* 4.2266
11	* 0.6313	* 0.7135	* 0.6691	* 0.7111	* 0.6432	* 0.6848	* 0.6169	* 0.3501
	* 2.8359	* 2.7424	* 2.7524	* 2.7874	* 2.7808	* 2.8670	* 3.2244	* 4.8542
12	* 0.7071	* 0.6469	* 0.7160	* 0.6430	* 0.5347	* 0.6074	* 0.4476	*
	* 2.7287	* 2.8020	* 2.7731	* 2.7817	* 2.8988	* 3.0082	* 3.5941	*
13	* 0.6074	* 0.6243	* 0.6346	* 0.6846	* 0.6071	* 0.4546	* 0.3004	*
	* 2.9193	* 2.8502	* 2.8554	* 2.8676	* 3.0090	* 3.7266	* 5.4346	*
14	* 0.6439	* 0.6470	* 0.6432	* 0.6167	* 0.4473	* 0.2930	*	*
	* 2.9635	* 2.9644	* 3.0417	* 3.2255	* 3.5930	* 5.4278	*	*
15	* 0.3901	* 0.3986	* 0.3751	* 0.3499	* F-SUB-Q			
	* 3.9882	* 4.0421	* 4.2266	* 4.8556	* M-SUB-Q			

AT 100% POWER, 500 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0038	* 1.0771	* 1.2995	* 1.1149	* 1.3050	* 1.0986	* 1.2694	* 0.7408
	* 1.7972	* 1.7461	* 1.5531	* 1.6478	* 1.5163	* 1.6591	* 1.5429	* 2.1573
9	* 1.0771	* 1.3018	* 1.1024	* 1.3444	* 1.1418	* 1.1849	* 1.2768	* 0.7586
	* 1.7461	* 1.5598	* 1.6981	* 1.4920	* 1.6284	* 1.5390	* 1.5420	* 2.1867
10	* 1.2995	* 1.1014	* 1.1816	* 1.2136	* 1.3528	* 1.1946	* 1.2712	* 0.7092
	* 1.5531	* 1.7000	* 1.5895	* 1.5575	* 1.5033	* 1.5576	* 1.5777	* 2.3059
11	* 1.1149	* 1.3431	* 1.2123	* 1.3473	* 1.2194	* 1.2914	* 1.2355	* 0.6716
	* 1.6478	* 1.4930	* 1.5593	* 1.4958	* 1.5011	* 1.5497	* 1.6315	* 2.5954
12	* 1.3050	* 1.1414	* 1.3522	* 1.2191	* 1.0985	* 1.2422	* 0.8456	*
	* 1.5163	* 1.6291	* 1.5038	* 1.5016	* 1.5740	* 1.5509	* 1.9417	*
13	* 1.0986	* 1.1847	* 1.1944	* 1.2911	* 1.2418	* 0.8592	* 0.5736	*
	* 1.6591	* 1.5391	* 1.5579	* 1.5499	* 1.5513	* 2.1005	* 2.9180	*
14	* 1.2694	* 1.2767	* 1.2711	* 1.2351	* 0.8449	* 0.5597	*	*
	* 1.5429	* 1.5420	* 1.5778	* 1.6319	* 1.9413	* 2.9127	*	*
15	* 0.7408	* 0.7585	* 0.7091	* 0.6714	* F-SUB-Q			
	* 2.1573	* 2.1867	* 2.3059	* 2.5960	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 63 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 500 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1687	* 1.2269	* 1.5060	* 1.2681	* 1.5052	* 1.2412	* 1.4684	* 0.8580
	* 1.6484	* 1.5612	* 1.3583	* 1.4684	* 1.3317	* 1.4878	* 1.3498	* 1.8874
9	* 1.2269	* 1.4860	* 1.2515	* 1.5296	* 1.2920	* 1.3516	* 1.4780	* 0.8860
	* 1.5612	* 1.3860	* 1.5168	* 1.3287	* 1.4601	* 1.3661	* 1.3482	* 1.8926
10	* 1.5060	* 1.2503	* 1.3339	* 1.3724	* 1.5421	* 1.3547	* 1.4720	* 0.8302
	* 1.3583	* 1.5186	* 1.4279	* 1.3968	* 1.3342	* 1.3905	* 1.3793	* 1.9863
11	* 1.2681	* 1.5281	* 1.3708	* 1.5378	* 1.3900	* 1.5011	* 1.4381	* 0.7871
	* 1.4684	* 1.3296	* 1.3984	* 1.3294	* 1.3397	* 1.3541	* 1.4171	* 2.2441
12	* 1.5052	* 1.2916	* 1.5414	* 1.3897	* 1.3128	* 1.4610	* 0.9908	*
	* 1.3317	* 1.4607	* 1.3347	* 1.3401	* 1.4016	* 1.3607	* 1.6846	*
13	* 1.2412	* 1.3514	* 1.3546	* 1.5008	* 1.4606	* 1.0392	* 0.6656	*
	* 1.4878	* 1.3662	* 1.3907	* 1.3542	* 1.3611	* 1.8078	* 2.5670	*
14	* 1.4684	* 1.4779	* 1.4719	* 1.4377	* 0.9902	* 0.6533	*	*
	* 1.3498	* 1.3483	* 1.3794	* 1.4175	* 1.6837	* 2.5478	*	*
15	* 0.8580	* 0.8860	* 0.8301	* 0.7869	* F-SUB-Q			
	* 1.8874	* 1.8926	* 1.9863	* 2.2444	* M-SUB-Q			

AT 100% POWER, 500 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2300	* 1.2930	* 1.6227	* 1.3370	* 1.6161	* 1.3011	* 1.5833	* 0.8921
	* 1.5990	* 1.5024	* 1.2736	* 1.4069	* 1.2519	* 1.4323	* 1.2626	* 1.8318
9	* 1.2930	* 1.6074	* 1.3192	* 1.6524	* 1.3592	* 1.4285	* 1.5939	* 0.9215
	* 1.5024	* 1.2990	* 1.4540	* 1.2412	* 1.4024	* 1.3040	* 1.2613	* 1.8364
10	* 1.6227	* 1.3177	* 1.4011	* 1.4491	* 1.6682	* 1.4295	* 1.5891	* 0.8578
	* 1.2736	* 1.4559	* 1.3735	* 1.3360	* 1.2471	* 1.3326	* 1.2885	* 1.9403
11	* 1.3370	* 1.6508	* 1.4474	* 1.6639	* 1.4711	* 1.6156	* 1.5567	* 0.8176
	* 1.4069	* 1.2418	* 1.3376	* 1.2443	* 1.2836	* 1.2747	* 1.3239	* 2.1803
12	* 1.6161	* 1.3588	* 1.6676	* 1.4707	* 1.3910	* 1.5851	* 1.0292	*
	* 1.2519	* 1.4030	* 1.2475	* 1.2840	* 1.3490	* 1.2772	* 1.6457	*
13	* 1.3011	* 1.4284	* 1.4293	* 1.6154	* 1.5848	* 1.0992	* 0.6876	*
	* 1.4323	* 1.3040	* 1.3328	* 1.2749	* 1.2775	* 1.7453	* 2.5297	*
14	* 1.5833	* 1.5938	* 1.5890	* 1.5564	* 1.0289	* 0.6751	*	*
	* 1.2626	* 1.2613	* 1.2886	* 1.3242	* 1.6444	* 2.5097	*	*
15	* 0.8921	* 0.9216	* 0.8577	* 0.8174	* F-SUB-Q			
	* 1.8318	* 1.8362	* 1.9403	* 2.1808	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 64 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 500 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2316	* 1.2988	* 1.6424	* 1.3417	* 1.6313	* 1.3003	* 1.6008	* 0.8950
	* 1.6235	* 1.5163	* 1.2714	* 1.4166	* 1.2527	* 1.4440	* 1.2599	* 1.8437
9	* 1.2988	* 1.6283	* 1.3246	* 1.6753	* 1.3632	* 1.4321	* 1.6112	* 0.9265
	* 1.5163	* 1.2992	* 1.4631	* 1.2362	* 1.4124	* 1.3120	* 1.2586	* 1.8442
10	* 1.6424	* 1.3231	* 1.4011	* 1.4570	* 1.6910	* 1.4315	* 1.6070	* 0.8625
	* 1.2714	* 1.4650	* 1.3875	* 1.3421	* 1.2453	* 1.3444	* 1.2848	* 1.9480
11	* 1.3417	* 1.6737	* 1.4555	* 1.6867	* 1.4785	* 1.6323	* 1.5777	* 0.8221
	* 1.4166	* 1.2367	* 1.3436	* 1.2434	* 1.2947	* 1.2785	* 1.3227	* 2.1877
12	* 1.6313	* 1.3628	* 1.6904	* 1.4782	* 1.3940	* 1.6060	* 1.0376	*
	* 1.2527	* 1.4130	* 1.2457	* 1.2952	* 1.3679	* 1.2801	* 1.6562	*
13	* 1.3003	* 1.4320	* 1.4313	* 1.6322	* 1.6056	* 1.1104	* 0.6898	*
	* 1.4440	* 1.3120	* 1.3443	* 1.2786	* 1.2804	* 1.7574	* 2.5654	*
14	* 1.6008	* 1.6112	* 1.6070	* 1.5774	* 1.0375	* 0.6773	*	*
	* 1.2599	* 1.2586	* 1.2848	* 1.3229	* 1.6546	* 2.5448	*	*
15	* 0.8950	* 0.9266	* 0.8624	* 0.8220	* F-SUB-Q			
	* 1.8437	* 1.8441	* 1.9479	* 2.1879	* M-SUB-Q			

AT 100% POWER, 500 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2158	* 1.2849	* 1.6294	* 1.3254	* 1.6154	* 1.2809	* 1.5857	* 0.8872
	* 1.6600	* 1.5451	* 1.2952	* 1.4507	* 1.2794	* 1.4800	* 1.2850	* 1.8810
9	* 1.2849	* 1.6164	* 1.3092	* 1.6629	* 1.3464	* 1.4143	* 1.5958	* 0.9193
	* 1.5451	* 1.3192	* 1.4949	* 1.2587	* 1.4450	* 1.3423	* 1.2834	* 1.8791
10	* 1.6294	* 1.3077	* 1.3822	* 1.4421	* 1.6783	* 1.4106	* 1.5917	* 0.8589
	* 1.2952	* 1.4969	* 1.4197	* 1.3691	* 1.2652	* 1.3767	* 1.3085	* 1.9757
11	* 1.3254	* 1.6612	* 1.4406	* 1.6734	* 1.4612	* 1.6158	* 1.5641	* 0.8157
	* 1.4507	* 1.2593	* 1.3705	* 1.2656	* 1.3234	* 1.3051	* 1.3459	* 2.2236
12	* 1.6154	* 1.3461	* 1.6776	* 1.4609	* 1.3739	* 1.5919	* 1.0338	*
	* 1.2794	* 1.4456	* 1.2656	* 1.3238	* 1.4069	* 1.3108	* 1.6841	*
13	* 1.2809	* 1.4142	* 1.4104	* 1.6157	* 1.5915	* 1.1041	* 0.6847	*
	* 1.4800	* 1.3423	* 1.3766	* 1.3051	* 1.3110	* 1.7985	* 2.6289	*
14	* 1.5857	* 1.5958	* 1.5917	* 1.5639	* 1.0337	* 0.6722	*	*
	* 1.2850	* 1.2833	* 1.3085	* 1.3461	* 1.6825	* 2.6085	*	*
15	* 0.8872	* 0.9194	* 0.8588	* 0.8156	* F-SUB-Q			
	* 1.8810	* 1.8789	* 1.9756	* 2.2238	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 65 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 500 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2046	* 1.2733	* 1.6253	* 1.3130	* 1.6085	* 1.2676	* 1.5810	* 0.8718
	* 1.6876	* 1.5648	* 1.3130	* 1.4847	* 1.3027	* 1.5154	* 1.3059	* 1.9402
9	* 1.2733	* 1.6141	* 1.2978	* 1.6606	* 1.3321	* 1.4021	* 1.5908	* 0.9037
	* 1.5648	* 1.3256	* 1.5274	* 1.2760	* 1.4785	* 1.3715	* 1.3037	* 1.9373
10	* 1.6253	* 1.2963	* 1.3676	* 1.4305	* 1.6749	* 1.3956	* 1.5867	* 0.8409
	* 1.3130	* 1.5294	* 1.4440	* 1.3891	* 1.2730	* 1.3985	* 1.3263	* 2.0424
11	* 1.3130	* 1.6590	* 1.4290	* 1.6701	* 1.4480	* 1.6078	* 1.5595	* 0.8010
	* 1.4847	* 1.2770	* 1.3906	* 1.2771	* 1.3459	* 1.3220	* 1.3567	* 2.2779
12	* 1.6085	* 1.3319	* 1.6744	* 1.4478	* 1.3595	* 1.5873	* 1.0158	
	* 1.3027	* 1.4791	* 1.2734	* 1.3462	* 1.4398	* 1.3305	* 1.7327	
13	* 1.2676	* 1.4020	* 1.3955	* 1.6078	* 1.5870	* 1.0892	* 0.6712	
	* 1.5154	* 1.3715	* 1.3986	* 1.3220	* 1.3308	* 1.8459	* 2.7163	
14	* 1.5810	* 1.5908	* 1.5867	* 1.5593	* 1.0158	* 0.6582		
	* 1.3059	* 1.3037	* 1.3263	* 1.3568	* 1.7309	* 2.6982		
15	* 0.8718	* 0.9038	* 0.8408	* 0.8009	* F-SUB-Q			
	* 1.9402	* 1.9371	* 2.0423	* 2.2781	* M-SUB-Q			

AT 100% POWER, 500 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1924	* 1.2612	* 1.6154	* 1.2992	* 1.5962	* 1.2537	* 1.5697	* 0.8602
	* 1.7245	* 1.6008	* 1.3351	* 1.5254	* 1.3349	* 1.5582	* 1.3367	* 1.9993
9	* 1.2612	* 1.6052	* 1.2849	* 1.6509	* 1.3171	* 1.3881	* 1.5791	* 0.8922
	* 1.6008	* 1.3504	* 1.5599	* 1.3012	* 1.5147	* 1.4075	* 1.3338	* 1.9945
10	* 1.6154	* 1.2835	* 1.3521	* 1.4170	* 1.6643	* 1.3794	* 1.5749	* 0.8291
	* 1.3351	* 1.5619	* 1.4777	* 1.4175	* 1.2963	* 1.4296	* 1.3510	* 2.1013
11	* 1.2992	* 1.6494	* 1.4155	* 1.6594	* 1.4328	* 1.5943	* 1.5485	* 0.7901
	* 1.5254	* 1.3023	* 1.4189	* 1.2989	* 1.3740	* 1.3460	* 1.3804	* 2.3279
12	* 1.5962	* 1.3169	* 1.6637	* 1.4327	* 1.3436	* 1.5758	* 1.0038	
	* 1.3349	* 1.5152	* 1.2967	* 1.3744	* 1.4691	* 1.3525	* 1.7676	
13	* 1.2537	* 1.3880	* 1.3792	* 1.5943	* 1.5756	* 1.0774	* 0.6618	
	* 1.5582	* 1.4076	* 1.4294	* 1.3460	* 1.3527	* 1.8865	* 2.7788	
14	* 1.5697	* 1.5791	* 1.5750	* 1.5484	* 1.0038	* 0.6484		
	* 1.3367	* 1.3337	* 1.3509	* 1.3805	* 1.7656	* 2.7626		
15	* 0.8602	* 0.8923	* 0.8290	* 0.7900	* F-SUB-Q			
	* 1.9993	* 1.9944	* 2.1012	* 2.3281	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 66 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 500 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1857 *	* 1.2536 *	* 1.6135 *	* 1.2910 *	* 1.5922 *	* 1.2448 *	* 1.5663 *	* 0.8494 *
	* 1.7757 *	* 1.6403 *	* 1.3595 *	* 1.5674 *	* 1.3664 *	* 1.6022 *	* 1.3671 *	* 2.0667 *
9	* 1.2536 *	* 1.6046 *	* 1.2771 *	* 1.6494 *	* 1.3073 *	* 1.3800 *	* 1.5753 *	* 0.8802 *
	* 1.6403 *	* 1.3748 *	* 1.5969 *	* 1.3252 *	* 1.5524 *	* 1.4440 *	* 1.3633 *	* 2.0633 *
10	* 1.6135 *	* 1.2757 *	* 1.3425 *	* 1.4089 *	* 1.6618 *	* 1.3687 *	* 1.5711 *	* 0.8164 *
	* 1.3595 *	* 1.5989 *	* 1.5109 *	* 1.4474 *	* 1.3194 *	* 1.4608 *	* 1.3752 *	* 2.1727 *
11	* 1.2910 *	* 1.6479 *	* 1.4074 *	* 1.6569 *	* 1.4235 *	* 1.5887 *	* 1.5450 *	* 0.7786 *
	* 1.5674 *	* 1.3264 *	* 1.4489 *	* 1.3263 *	* 1.4103 *	* 1.3766 *	* 1.4071 *	* 2.3938 *
12	* 1.5922 *	* 1.3071 *	* 1.6613 *	* 1.4234 *	* 1.3338 *	* 1.5724 *	* 0.9912 *	
	* 1.3664 *	* 1.5529 *	* 1.3198 *	* 1.4105 *	* 1.5104 *	* 1.3812 *	* 1.8229 *	
13	* 1.2448 *	* 1.3799 *	* 1.3685 *	* 1.5887 *	* 1.5722 *	* 1.0671 *	* 0.6527 *	
	* 1.6022 *	* 1.4441 *	* 1.4606 *	* 1.3765 *	* 1.3814 *	* 1.9408 *	* 2.8675 *	
14	* 1.5663 *	* 1.5753 *	* 1.5712 *	* 1.5449 *	* 0.9913 *	* 0.6388 *		
	* 1.3671 *	* 1.3633 *	* 1.3751 *	* 1.4072 *	* 1.8207 *	* 2.8538 *		
15	* 0.8494 *	* 0.8803 *	* 0.8164 *	* 0.7784 *	* F-SUB-Q			
	* 2.0667 *	* 2.0632 *	* 2.1726 *	* 2.3942 *	* M-SUB-Q			

AT 100% POWER, 500 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1716 *	* 1.2406 *	* 1.5906 *	* 1.2751 *	* 1.5679 *	* 1.2279 *	* 1.5419 *	* 0.8506 *
	* 1.8380 *	* 1.6929 *	* 1.4128 *	* 1.6277 *	* 1.4239 *	* 1.6661 *	* 1.4241 *	* 2.1190 *
9	* 1.2406 *	* 1.5821 *	* 1.2630 *	* 1.6249 *	* 1.3019 *	* 1.3621 *	* 1.5504 *	* 0.8818 *
	* 1.6929 *	* 1.4242 *	* 1.6540 *	* 1.3782 *	* 1.5979 *	* 1.4996 *	* 1.4190 *	* 2.1116 *
10	* 1.5906 *	* 1.2616 *	* 1.3251 *	* 1.3930 *	* 1.6368 *	* 1.3498 *	* 1.5458 *	* 0.8232 *
	* 1.4128 *	* 1.6562 *	* 1.5656 *	* 1.4974 *	* 1.3675 *	* 1.5146 *	* 1.4286 *	* 2.2046 *
11	* 1.2751 *	* 1.6235 *	* 1.3916 *	* 1.6318 *	* 1.4054 *	* 1.5636 *	* 1.5209 *	* 0.7802 *
	* 1.6277 *	* 1.3794 *	* 1.4989 *	* 1.3738 *	* 1.4576 *	* 1.4267 *	* 1.4551 *	* 2.4376 *
12	* 1.5679 *	* 1.3013 *	* 1.6363 *	* 1.4054 *	* 1.3139 *	* 1.5472 *	* 0.9980 *	
	* 1.4239 *	* 1.5988 *	* 1.3679 *	* 1.4578 *	* 1.5738 *	* 1.4409 *	* 1.8499 *	
13	* 1.2279 *	* 1.3619 *	* 1.3496 *	* 1.5637 *	* 1.5469 *	* 1.0660 *	* 0.6557 *	
	* 1.6661 *	* 1.4997 *	* 1.5146 *	* 1.4266 *	* 1.4411 *	* 1.9959 *	* 2.9273 *	
14	* 1.5419 *	* 1.5504 *	* 1.5459 *	* 1.5208 *	* 0.9980 *	* 0.6413 *		
	* 1.4241 *	* 1.4189 *	* 1.4285 *	* 1.4551 *	* 1.8479 *	* 2.9153 *		
15	* 0.8506 *	* 0.8819 *	* 0.8232 *	* 0.7801 *	* F-SUB-Q			
	* 2.1190 *	* 2.1115 *	* 2.2045 *	* 2.4377 *	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 67 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 500 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1755	* 1.2438	* 1.6088	* 1.2792	* 1.5837	* 1.2314	* 1.5589	* 0.8392
	* 1.8850	* 1.7405	* 1.4412	* 1.6754	* 1.4545	* 1.7134	* 1.4519	* 2.2110
9	* 1.2438	* 1.6018	* 1.2658	* 1.6449	* 1.2932	* 1.3680	* 1.5672	* 0.8720
	* 1.7405	* 1.4496	* 1.7027	* 1.4033	* 1.6563	* 1.5385	* 1.4462	* 2.2001
10	* 1.6088	* 1.2645	* 1.3282	* 1.3981	* 1.6559	* 1.3525	* 1.5628	* 0.8076
	* 1.4412	* 1.7049	* 1.6094	* 1.5370	* 1.3902	* 1.5544	* 1.4534	* 2.3113
11	* 1.2792	* 1.6434	* 1.3966	* 1.6507	* 1.4098	* 1.5777	* 1.5375	* 0.7701
	* 1.6754	* 1.4046	* 1.5386	* 1.3955	* 1.4927	* 1.4516	* 1.4778	* 2.5374
12	* 1.5837	* 1.2932	* 1.6554	* 1.4098	* 1.3181	* 1.5646	* 0.9830	
	* 1.4545	* 1.6566	* 1.3905	* 1.4929	* 1.6072	* 1.4584	* 1.9245	
13	* 1.2314	* 1.3678	* 1.3526	* 1.5778	* 1.5644	* 1.0585	* 0.6449	
	* 1.7134	* 1.5386	* 1.5543	* 1.4515	* 1.4586	* 2.0586	* 3.0408	
14	* 1.5589	* 1.5673	* 1.5629	* 1.5375	* 0.9831	* 0.6302		
	* 1.4519	* 1.4461	* 1.4533	* 1.4778	* 1.9221	* 3.0305		
15	* 0.8392	* 0.8720	* 0.8075	* 0.7700	* F-SUB-Q			
	* 2.2110	* 2.1999	* 2.3111	* 2.5376	* M-SUB-Q			

AT 100% POWER, 500 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1748	* 1.2434	* 1.6121	* 1.2780	* 1.5851	* 1.2290	* 1.5602	* 0.8374
	* 1.9563	* 1.8066	* 1.4918	* 1.7399	* 1.5072	* 1.7786	* 1.5023	* 2.2941
9	* 1.2434	* 1.6059	* 1.2651	* 1.6481	* 1.2920	* 1.3666	* 1.5682	* 0.8705
	* 1.8066	* 1.5000	* 1.7669	* 1.4513	* 1.7189	* 1.5947	* 1.4955	* 2.2811
10	* 1.6121	* 1.2638	* 1.3258	* 1.3974	* 1.6584	* 1.3496	* 1.5637	* 0.8064
	* 1.4918	* 1.7692	* 1.6712	* 1.5937	* 1.4373	* 1.6122	* 1.5010	* 2.3927
11	* 1.2780	* 1.6467	* 1.3959	* 1.6532	* 1.4078	* 1.5777	* 1.5389	* 0.7682
	* 1.7399	* 1.4525	* 1.5953	* 1.4424	* 1.5468	* 1.5011	* 1.5262	* 2.6252
12	* 1.5851	* 1.2914	* 1.6580	* 1.4079	* 1.3151	* 1.5659	* 0.9824	
	* 1.5072	* 1.7192	* 1.4376	* 1.5470	* 1.6645	* 1.5044	* 1.9884	
13	* 1.2290	* 1.3665	* 1.3497	* 1.5779	* 1.5657	* 1.0581	* 0.6435	
	* 1.7786	* 1.5948	* 1.6122	* 1.5009	* 1.5046	* 2.1243	* 3.1416	
14	* 1.5602	* 1.5684	* 1.5638	* 1.5389	* 0.9825	* 0.6285	*	
	* 1.5023	* 1.4954	* 1.5008	* 1.5261	* 1.9859	* 3.1329	*	
15	* 0.8374	* 0.8706	* 0.8064	* 0.7681	* F-SUB-Q			
	* 2.2941	* 2.2810	* 2.3925	* 2.6253	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 68 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 500 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1712	* 1.2396	* 1.6027	* 1.2728	* 1.5741	* 1.2226	* 1.5492	* 0.8433
	* 1.9082	* 1.7606	* 1.4692	* 1.7043	* 1.4927	* 1.7722	* 1.5155	* 2.2708
9	* 1.2396	* 1.5968	* 1.2609	* 1.6375	* 1.2991	* 1.3593	* 1.5568	* 0.8754
	* 1.7606	* 1.4769	* 1.7262	* 1.4429	* 1.6841	* 1.5965	* 1.5111	* 2.2607
10	* 1.6027	* 1.2597	* 1.3185	* 1.3920	* 1.6473	* 1.3416	* 1.5519	* 0.8162
	* 1.4692	* 1.7277	* 1.6470	* 1.5788	* 1.4450	* 1.6127	* 1.5226	* 2.3617
11	* 1.2728	* 1.6361	* 1.3906	* 1.6421	* 1.4006	* 1.5660	* 1.5280	* 0.7727
	* 1.7043	* 1.4440	* 1.5803	* 1.4526	* 1.5529	* 1.5237	* 1.5554	* 2.6174
12	* 1.5741	* 1.2986	* 1.6469	* 1.4006	* 1.3058	* 1.5544	* 0.9933	*
	* 1.4927	* 1.6850	* 1.4453	* 1.5530	* 1.6914	* 1.5435	* 1.9861	*
13	* 1.2226	* 1.3592	* 1.3416	* 1.5662	* 1.5542	* 1.0631	* 0.6488	*
	* 1.7722	* 1.5967	* 1.6126	* 1.5235	* 1.5436	* 2.1466	* 3.1470	*
14	* 1.5492	* 1.5569	* 1.5520	* 1.5281	* 0.9934	* 0.6337	*	*
	* 1.5155	* 1.5110	* 1.5224	* 1.5553	* 1.9838	* 3.1382	*	*
15	* 0.8433	* 0.8754	* 0.8161	* 0.7726	* F-SUB-Q			
	* 2.2708	* 2.2606	* 2.3615	* 2.6175	* M-SUB-Q			

AT 100% POWER, 500 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1791	* 1.2490	* 1.6282	* 1.2824	* 1.5971	* 1.2315	* 1.5734	* 0.8362
	* 1.8300	* 1.6843	* 1.3939	* 1.6299	* 1.4179	* 1.6953	* 1.4380	* 2.2059
9	* 1.2490	* 1.6238	* 1.2701	* 1.6651	* 1.2959	* 1.3716	* 1.5810	* 0.8693
	* 1.6843	* 1.3999	* 1.6520	* 1.3675	* 1.6266	* 1.5247	* 1.4339	* 2.1943
10	* 1.6282	* 1.2689	* 1.3277	* 1.4038	* 1.6740	* 1.3510	* 1.5762	* 0.8048
	* 1.3939	* 1.6533	* 1.5763	* 1.5083	* 1.3694	* 1.5425	* 1.4434	* 2.3074
11	* 1.2824	* 1.6637	* 1.4023	* 1.6686	* 1.4115	* 1.5872	* 1.5519	* 0.7666
	* 1.6299	* 1.3685	* 1.5097	* 1.3769	* 1.4836	* 1.4470	* 1.4737	* 2.5394
12	* 1.5971	* 1.2955	* 1.6737	* 1.4116	* 1.3164	* 1.5790	* 0.9834	*
	* 1.4179	* 1.6268	* 1.3697	* 1.4836	* 1.6154	* 1.4628	* 1.9299	*
13	* 1.2315	* 1.3715	* 1.3510	* 1.5875	* 1.5788	* 1.0612	* 0.6419	*
	* 1.6953	* 1.5249	* 1.5424	* 1.4468	* 1.4630	* 2.0693	* 3.0576	*
14	* 1.5734	* 1.5812	* 1.5764	* 1.5521	* 0.9836	* 0.6261	*	*
	* 1.4380	* 1.4338	* 1.4432	* 1.4736	* 1.9273	* 3.0529	*	*
15	* 0.8362	* 0.8694	* 0.8048	* 0.7664	* F-SUB-Q			
	* 2.2059	* 2.1941	* 2.3071	* 2.5398	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 69 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 500 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1865 *	* 1.2573 *	* 1.6447 *	* 1.2906 *	* 1.6114 *	* 1.2384 *	* 1.5880 *	* 0.8377 *
	* 1.7634 *	* 1.6221 *	* 1.3381 *	* 1.5701 *	* 1.3623 *	* 1.6336 *	* 1.3806 *	* 2.1323 *
9	* 1.2573 *	* 1.6411 *	* 1.2781 *	* 1.6823 *	* 1.3014 *	* 1.3805 *	* 1.5956 *	* 0.8686 *
	* 1.6221 *	* 1.3432 *	* 1.5912 *	* 1.3123 *	* 1.5684 *	* 1.4679 *	* 1.3766 *	* 2.1266 *
10	* 1.6447 *	* 1.2770 *	* 1.3345 *	* 1.4134 *	* 1.6907 *	* 1.3578 *	* 1.5906 *	* 0.8052 *
	* 1.3381 *	* 1.5926 *	* 1.5198 *	* 1.4519 *	* 1.3141 *	* 1.4868 *	* 1.3853 *	* 2.2324 *
11	* 1.2906 *	* 1.6809 *	* 1.4119 *	* 1.6850 *	* 1.4198 *	* 1.6001 *	* 1.5666 *	* 0.7651 *
	* 1.5701 *	* 1.3132 *	* 1.4533 *	* 1.3213 *	* 1.4289 *	* 1.3898 *	* 1.4131 *	* 2.4612 *
12	* 1.6114 *	* 1.3010 *	* 1.6904 *	* 1.4200 *	* 1.3232 *	* 1.5938 *	* 0.9854 *	
	* 1.3623 *	* 1.5685 *	* 1.3143 *	* 1.4288 *	* 1.5562 *	* 1.4025 *	* 1.8628 *	
13	* 1.2384 *	* 1.3803 *	* 1.3578 *	* 1.6004 *	* 1.5937 *	* 1.0658 *	* 0.6423 *	
	* 1.6336 *	* 1.4680 *	* 1.4868 *	* 1.3896 *	* 1.4026 *	* 1.9924 *	* 2.9515 *	
14	* 1.5880 *	* 1.5958 *	* 1.5909 *	* 1.5668 *	* 0.9857 *	* 0.6259 *		
	* 1.3806 *	* 1.3765 *	* 1.3851 *	* 1.4130 *	* 1.8602 *	* 2.9496 *		
15	* 0.8377 *	* 0.8687 *	* 0.8052 *	* 0.7649 *	* F-SUB-Q			
	* 2.1323 *	* 2.1264 *	* 2.2322 *	* 2.4615 *	* M-SUB-Q			

AT 100% POWER, 500 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1939 *	* 1.2660 *	* 1.6585 *	* 1.2990 *	* 1.6233 *	* 1.2457 *	* 1.5997 *	* 0.8439 *
	* 1.7045 *	* 1.5666 *	* 1.2900 *	* 1.5172 *	* 1.3143 *	* 1.5782 *	* 1.3309 *	* 2.0561 *
9	* 1.2660 *	* 1.6556 *	* 1.2869 *	* 1.6963 *	* 1.3141 *	* 1.3892 *	* 1.6070 *	* 0.8788 *
	* 1.5666 *	* 1.2945 *	* 1.5367 *	* 1.2645 *	* 1.5108 *	* 1.4169 *	* 1.3269 *	* 2.0417 *
10	* 1.6585 *	* 1.2859 *	* 1.3422 *	* 1.4234 *	* 1.7042 *	* 1.3652 *	* 1.6018 *	* 0.8130 *
	* 1.2900 *	* 1.5380 *	* 1.4686 *	* 1.4007 *	* 1.2658 *	* 1.4361 *	* 1.3349 *	* 2.1467 *
11	* 1.2990 *	* 1.6950 *	* 1.4219 *	* 1.6985 *	* 1.4286 *	* 1.6106 *	* 1.5780 *	* 0.7734 *
	* 1.5172 *	* 1.2654 *	* 1.4020 *	* 1.2726 *	* 1.3786 *	* 1.3394 *	* 1.3604 *	* 2.3625 *
12	* 1.6233 *	* 1.3138 *	* 1.7039 *	* 1.4288 *	* 1.3299 *	* 1.6055 *	* 0.9956 *	
	* 1.3143 *	* 1.5115 *	* 1.2660 *	* 1.3786 *	* 1.5024 *	* 1.3495 *	* 1.7875 *	
13	* 1.2457 *	* 1.3890 *	* 1.3652 *	* 1.6109 *	* 1.6053 *	* 1.0753 *	* 0.6476 *	
	* 1.5782 *	* 1.4170 *	* 1.4361 *	* 1.3391 *	* 1.3496 *	* 1.9139 *	* 2.8370 *	
14	* 1.5997 *	* 1.6072 *	* 1.6021 *	* 1.5782 *	* 0.9959 *	* 0.6310 *		
	* 1.3309 *	* 1.3268 *	* 1.3347 *	* 1.3602 *	* 1.7850 *	* 2.8357 *		
15	* 0.8439 *	* 0.8789 *	* 0.8131 *	* 0.7733 *	* F-SUB-Q			
	* 2.0561 *	* 2.0415 *	* 2.1464 *	* 2.3626 *	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 70 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 500 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2056 *	* 1.2762 *	* 1.6676 *	* 1.3094 *	* 1.6308 *	* 1.2538 *	* 1.6062 *	* 0.8594 *
	* 1.7797 *	* 1.6415 *	* 1.3550 *	* 1.5902 *	* 1.3813 *	* 1.6545 *	* 1.3979 *	* 2.1312 *
9	* 1.2762 *	* 1.6643 *	* 1.2991 *	* 1.7045 *	* 1.3365 *	* 1.3976 *	* 1.6132 *	* 0.8934 *
	* 1.6415 *	* 1.3596 *	* 1.6099 *	* 1.3282 *	* 1.5680 *	* 1.4857 *	* 1.3935 *	* 2.1183 *
10	* 1.6676 *	* 1.2988 *	* 1.3513 *	* 1.4342 *	* 1.7121 *	* 1.3731 *	* 1.6076 *	* 0.8318 *
	* 1.3550 *	* 1.6106 *	* 1.5410 *	* 1.4670 *	* 1.3284 *	* 1.5059 *	* 1.4018 *	* 2.2123 *
11	* 1.3094 *	* 1.7031 *	* 1.4327 *	* 1.7063 *	* 1.4377 *	* 1.6173 *	* 1.5846 *	* 0.7864 *
	* 1.5902 *	* 1.3291 *	* 1.4684 *	* 1.3353 *	* 1.4438 *	* 1.4048 *	* 1.4263 *	* 2.4479 *
12	* 1.6308 *	* 1.3361 *	* 1.7118 *	* 1.4380 *	* 1.3360 *	* 1.6117 *	* 1.0173 *	
	* 1.3813 *	* 1.5686 *	* 1.3286 *	* 1.4437 *	* 1.5743 *	* 1.4138 *	* 1.8411 *	
13	* 1.2538 *	* 1.3974 *	* 1.3730 *	* 1.6177 *	* 1.6116 *	* 1.0920 *	* 0.6595 *	
	* 1.6545 *	* 1.4858 *	* 1.5059 *	* 1.4045 *	* 1.4139 *	* 1.9820 *	* 2.9307 *	
14	* 1.6062 *	* 1.6134 *	* 1.6079 *	* 1.5848 *	* 1.0175 *	* 0.6429 *		
	* 1.3979 *	* 1.3934 *	* 1.4015 *	* 1.4261 *	* 1.8387 *	* 2.9279 *		
15	* 0.8594 *	* 0.8935 *	* 0.8318 *	* 0.7864 *	* F-SUB-Q			
	* 2.1312 *	* 2.1182 *	* 2.2120 *	* 2.4480 *	* M-SUB-Q			

AT 100% POWER, 500 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2256 *	* 1.3003 *	* 1.7151 *	* 1.3340 *	* 1.6760 *	* 1.2780 *	* 1.6523 *	* 0.8608 *
	* 1.7151 *	* 1.5800 *	* 1.2925 *	* 1.5320 *	* 1.3197 *	* 1.5937 *	* 1.3335 *	* 2.0869 *
9	* 1.3003 *	* 1.7132 *	* 1.3216 *	* 1.7554 *	* 1.3471 *	* 1.4281 *	* 1.6596 *	* 0.8940 *
	* 1.5800 *	* 1.2952 *	* 1.5513 *	* 1.2656 *	* 1.5266 *	* 1.4271 *	* 1.3292 *	* 2.0777 *
10	* 1.7151 *	* 1.3206 *	* 1.3768 *	* 1.4641 *	* 1.7627 *	* 1.4003 *	* 1.6541 *	* 0.8277 *
	* 1.2925 *	* 1.5526 *	* 1.4836 *	* 1.4104 *	* 1.2658 *	* 1.4490 *	* 1.3358 *	* 2.1808 *
11	* 1.3340 *	* 1.7540 *	* 1.4625 *	* 1.7566 *	* 1.4672 *	* 1.6610 *	* 1.6301 *	* 0.7859 *
	* 1.5320 *	* 1.2665 *	* 1.4118 *	* 1.2721 *	* 1.3870 *	* 1.3400 *	* 1.3582 *	* 2.4010 *
12	* 1.6760 *	* 1.3468 *	* 1.7624 *	* 1.4676 *	* 1.3639 *	* 1.6587 *	* 1.0167 *	
	* 1.3197 *	* 1.5272 *	* 1.2659 *	* 1.3869 *	* 1.5068 *	* 1.3433 *	* 1.8035 *	
13	* 1.2780 *	* 1.4279 *	* 1.4003 *	* 1.6614 *	* 1.6586 *	* 1.1016 *	* 0.6592 *	
	* 1.5937 *	* 1.4272 *	* 1.4490 *	* 1.3397 *	* 1.3434 *	* 1.9202 *	* 2.8689 *	
14	* 1.6523 *	* 1.6599 *	* 1.6544 *	* 1.6304 *	* 1.0171 *	* 0.6414 *		
	* 1.3335 *	* 1.3291 *	* 1.3355 *	* 1.3579 *	* 1.8008 *	* 2.8716 *		
15	* 0.8608 *	* 0.8941 *	* 0.8278 *	* 0.7858 *	* F-SUB-Q			
	* 2.0869 *	* 2.0775 *	* 2.1805 *	* 2.4012 *	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 71 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 500 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2451	* 1.3214	* 1.7474	* 1.3559	* 1.7069	* 1.2992	* 1.6836	* 0.8736 *
	* 1.6339	* 1.5090	* 1.2315	* 1.4639	* 1.2581	* 1.5247	* 1.2726	* 2.0034 *
9	* 1.3214	* 1.7455	* 1.3432	* 1.7892	* 1.3702	* 1.4534	* 1.6912	* 0.9077 *
	* 1.5090	* 1.2334	* 1.4822	* 1.2052	* 1.4568	* 1.3633	* 1.2683	* 1.9935 *
10	* 1.7474	* 1.3422	* 1.3995	* 1.4900	* 1.7969	* 1.4239	* 1.6854	* 0.8402 *
	* 1.2315	* 1.4834	* 1.4170	* 1.3447	* 1.2039	* 1.3837	* 1.2742	* 2.0925 *
11	* 1.3559	* 1.7877	* 1.4885	* 1.7907	* 1.4926	* 1.6918	* 1.6612	* 0.7974 *
	* 1.4639	* 1.2061	* 1.3460	* 1.2094	* 1.3218	* 1.2764	* 1.2946	* 2.3046 *
12	* 1.7069	* 1.3699	* 1.7967	* 1.4930	* 1.3863	* 1.6902	* 1.0334	*
	* 1.2581	* 1.4573	* 1.2041	* 1.3217	* 1.4350	* 1.2782	* 1.7236	*
13	* 1.2992	* 1.4532	* 1.4239	* 1.6922	* 1.6902	* 1.1198	* 0.6684	*
	* 1.5247	* 1.3634	* 1.3837	* 1.2760	* 1.2782	* 1.8323	* 2.7542	*
14	* 1.6836	* 1.6915	* 1.6857	* 1.6615	* 1.0338	* 0.6501	*	*
	* 1.2726	* 1.2682	* 1.2740	* 1.2944	* 1.7211	* 2.7579	*	*
15	* 0.8736	* 0.9077	* 0.8403	* 0.7973	* F-SUB-Q			
	* 2.0034	* 1.9933	* 2.0921	* 2.3049	* M-SUB-Q			

AT 100% POWER, 500 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2621	* 1.3352	* 1.7535	* 1.3726	* 1.7131	* 1.3120	* 1.6902	* 0.8965 *
	* 1.5734	* 1.4572	* 1.1971	* 1.4126	* 1.2232	* 1.4730	* 1.2361	* 1.9056 *
9	* 1.3352	* 1.7503	* 1.3614	* 1.7941	* 1.4027	* 1.4673	* 1.6979	* 0.9326 *
	* 1.4572	* 1.1996	* 1.4285	* 1.1719	* 1.3880	* 1.3171	* 1.2312	* 1.8930 *
10	* 1.7535	* 1.3611	* 1.4175	* 1.5060	* 1.8034	* 1.4387	* 1.6914	* 0.8682 *
	* 1.1971	* 1.4291	* 1.3661	* 1.2975	* 1.1688	* 1.3352	* 1.2371	* 1.9752 *
11	* 1.3726	* 1.7927	* 1.5043	* 1.7972	* 1.5089	* 1.7003	* 1.6679	* 0.8194 *
	* 1.4126	* 1.1728	* 1.2988	* 1.1738	* 1.2743	* 1.2363	* 1.2551	* 2.1863 *
12	* 1.7131	* 1.4023	* 1.8031	* 1.5090	* 1.3975	* 1.6960	* 1.0662	*
	* 1.2232	* 1.3886	* 1.1690	* 1.2743	* 1.3851	* 1.2384	* 1.6262	*
13	* 1.3120	* 1.4671	* 1.4386	* 1.7007	* 1.6959	* 1.1434	* 0.6870	*
	* 1.4730	* 1.3173	* 1.3352	* 1.2360	* 1.2385	* 1.7451	* 2.6085	*
14	* 1.6902	* 1.6981	* 1.6917	* 1.6682	* 1.0664	* 0.6681	*	*
	* 1.2361	* 1.2311	* 1.2369	* 1.2549	* 1.6241	* 2.6125	*	*
15	* 0.8965	* 0.9327	* 0.8682	* 0.8193	* F-SUB-Q			
	* 1.9056	* 1.8928	* 1.9749	* 2.1864	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 72 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 500 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2701	* 1.3456	* 1.7769	* 1.3796	* 1.7376	* 1.3272	* 1.7170	* 0.8901
	* 1.5309	* 1.4169	* 1.1572	* 1.3763	* 1.1815	* 1.4268	* 1.1913	* 1.8799
9	* 1.3456	* 1.7746	* 1.3681	* 1.8206	* 1.4002	* 1.4881	* 1.7260	* 0.9274
	* 1.4169	* 1.1589	* 1.3921	* 1.1314	* 1.3622	* 1.2720	* 1.1862	* 1.8653
10	* 1.7769	* 1.3671	* 1.4323	* 1.5243	* 1.8310	* 1.4583	* 1.7189	* 0.8580
	* 1.1572	* 1.3933	* 1.3238	* 1.2556	* 1.1266	* 1.2900	* 1.1914	* 1.9579
11	* 1.3796	* 1.8190	* 1.5225	* 1.8249	* 1.5278	* 1.7276	* 1.6933	* 0.8137
	* 1.3763	* 1.1323	* 1.2569	* 1.1311	* 1.2313	* 1.1903	* 1.2091	* 2.1556
12	* 1.7376	* 1.3998	* 1.8307	* 1.5282	* 1.4177	* 1.7226	* 1.0577	*
	* 1.1815	* 1.3628	* 1.1267	* 1.2312	* 1.3358	* 1.1919	* 1.6035	*
13	* 1.3272	* 1.4879	* 1.4582	* 1.7280	* 1.7225	* 1.1411	* 0.6804	*
	* 1.4268	* 1.2722	* 1.2900	* 1.1900	* 1.1920	* 1.7097	* 2.5773	*
14	* 1.7170	* 1.7263	* 1.7192	* 1.6935	* 1.0579	* 0.6615	*	*
	* 1.1913	* 1.1861	* 1.1912	* 1.2090	* 1.6015	* 2.5821	*	*
15	* 0.8901	* 0.9275	* 0.8580	* 0.8136	* F-SUB-Q			
	* 1.8799	* 1.8651	* 1.9576	* 2.1558	* M-SUB-Q			

AT 100% POWER, 500 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2354	* 1.3040	* 1.7046	* 1.3353	* 1.6716	* 1.2916	* 1.6501	* 0.8587
	* 1.5485	* 1.4381	* 1.1857	* 1.3985	* 1.2074	* 1.4416	* 1.2176	* 1.9158
9	* 1.3040	* 1.7034	* 1.3247	* 1.7476	* 1.3509	* 1.4462	* 1.6604	* 0.8924
	* 1.4381	* 1.1867	* 1.4142	* 1.1581	* 1.3863	* 1.2864	* 1.2111	* 1.9057
10	* 1.7046	* 1.3236	* 1.3949	* 1.4800	* 1.7599	* 1.4202	* 1.6534	* 0.8274
	* 1.1857	* 1.4155	* 1.3366	* 1.2711	* 1.1509	* 1.3014	* 1.2163	* 1.9957
11	* 1.3353	* 1.7459	* 1.4783	* 1.7550	* 1.4847	* 1.6664	* 1.6257	* 0.7824
	* 1.3985	* 1.1592	* 1.2725	* 1.1550	* 1.2448	* 1.2114	* 1.2359	* 2.2033
12	* 1.6716	* 1.3511	* 1.7597	* 1.4851	* 1.3798	* 1.6541	* 1.0227	*
	* 1.2074	* 1.3863	* 1.1511	* 1.2446	* 1.3481	* 1.2178	* 1.6284	*
13	* 1.2916	* 1.4459	* 1.4200	* 1.6667	* 1.6539	* 1.0969	* 0.6571	*
	* 1.4416	* 1.2866	* 1.3016	* 1.2112	* 1.2180	* 1.7461	* 2.6221	*
14	* 1.6501	* 1.6606	* 1.6537	* 1.6259	* 1.0225	* 0.6382	*	*
	* 1.2176	* 1.2109	* 1.2161	* 1.2358	* 1.6269	* 2.6299	*	*
15	* 0.8587	* 0.8925	* 0.8274	* 0.7822	* F-SUB-Q			
	* 1.9158	* 1.9055	* 1.9954	* 2.2036	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 73 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 100% POWER, 500 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0807 *	* 1.1366 *	* 1.4471 *	* 1.1614 *	* 1.4257 *	* 1.1295 *	* 1.4039 *	* 0.7406 *
	* 1.7445 *	* 1.6256 *	* 1.3749 *	* 1.5842 *	* 1.3936 *	* 1.6235 *	* 1.4084 *	* 2.1890 *
9	* 1.1366 *	* 1.4628 *	* 1.1558 *	* 1.5048 *	* 1.1817 *	* 1.2570 *	* 1.4138 *	* 0.7639 *
	* 1.6256 *	* 1.3604 *	* 1.5968 *	* 1.3238 *	* 1.5610 *	* 1.4575 *	* 1.3994 *	* 2.1928 *
10	* 1.4471 *	* 1.1546 *	* 1.2244 *	* 1.2965 *	* 1.5177 *	* 1.2467 *	* 1.4075 *	* 0.7129 *
	* 1.3749 *	* 1.5987 *	* 1.5000 *	* 1.4288 *	* 1.3132 *	* 1.4598 *	* 1.4059 *	* 2.2810 *
11	* 1.1614 *	* 1.5034 *	* 1.2948 *	* 1.5134 *	* 1.2969 *	* 1.4241 *	* 1.3785 *	* 0.6694 *
	* 1.5842 *	* 1.3250 *	* 1.4305 *	* 1.3174 *	* 1.4026 *	* 1.3943 *	* 1.4341 *	* 2.5368 *
12	* 1.4257 *	* 1.1818 *	* 1.5174 *	* 1.2972 *	* 1.1896 *	* 1.4060 *	* 0.8788 *	
	* 1.3936 *	* 1.5611 *	* 1.3134 *	* 1.4025 *	* 1.5394 *	* 1.4094 *	* 1.8657 *	
13	* 1.1295 *	* 1.2568 *	* 1.2464 *	* 1.4243 *	* 1.4058 *	* 0.9260 *	* 0.5686 *	
	* 1.6235 *	* 1.4577 *	* 1.4601 *	* 1.3941 *	* 1.4095 *	* 2.0359 *	* 2.9865 *	
14	* 1.4039 *	* 1.4139 *	* 1.4077 *	* 1.3785 *	* 0.8780 *	* 0.5527 *		
	* 1.4084 *	* 1.3993 *	* 1.4057 *	* 1.4340 *	* 1.8656 *	* 2.9925 *		
15	* 0.7406 *	* 0.7639 *	* 0.7128 *	* 0.6693 *	* F-SUB-Q			
	* 2.1890 *	* 2.1926 *	* 2.2809 *	* 2.5372 *	* M-SUB-Q			

AT 100% POWER, 500 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.5525 *	* 0.5793 *	* 0.6857 *	* 0.5922 *	* 0.6777 *	* 0.5620 *	* 0.6282 *	* 0.3599 *
	* 3.3658 *	* 3.1440 *	* 2.8589 *	* 3.0619 *	* 2.8888 *	* 3.2207 *	* 3.0997 *	* 4.4463 *
9	* 0.5793 *	* 0.6712 *	* 0.5886 *	* 0.6958 *	* 0.6039 *	* 0.5919 *	* 0.6319 *	* 0.3681 *
	* 3.1440 *	* 2.9202 *	* 3.0902 *	* 2.8185 *	* 3.0088 *	* 3.0486 *	* 3.0825 *	* 4.4925 *
10	* 0.6857 *	* 0.5881 *	* 0.5900 *	* 0.6386 *	* 0.7018 *	* 0.5974 *	* 0.6284 *	* 0.3478 *
	* 2.8589 *	* 3.0933 *	* 3.0665 *	* 2.8565 *	* 2.7949 *	* 2.9996 *	* 3.1003 *	* 4.6175 *
11	* 0.5922 *	* 0.6951 *	* 0.6378 *	* 0.7001 *	* 0.6203 *	* 0.6731 *	* 0.6091 *	* 0.3218 *
	* 3.0619 *	* 2.8210 *	* 2.8600 *	* 2.8031 *	* 2.8861 *	* 2.9046 *	* 3.1984 *	* 5.2118 *
12	* 0.6777 *	* 0.6039 *	* 0.7016 *	* 0.6204 *	* 0.5619 *	* 0.6268 *	* 0.4289 *	
	* 2.8888 *	* 3.0094 *	* 2.7956 *	* 2.8862 *	* 3.2096 *	* 3.1124 *	* 3.7704 *	
13	* 0.5620 *	* 0.5918 *	* 0.5973 *	* 0.6732 *	* 0.6267 *	* 0.4612 *	* 0.2762 *	
	* 3.2207 *	* 3.0489 *	* 3.0002 *	* 2.9044 *	* 3.1130 *	* 4.0315 *	* 6.0758 *	
14	* 0.6282 *	* 0.6319 *	* 0.6285 *	* 0.6090 *	* 0.4284 *	* 0.2719 *		
	* 3.0997 *	* 3.0823 *	* 3.1001 *	* 3.1986 *	* 3.7702 *	* 6.0111 *		
15	* 0.3599 *	* 0.3681 *	* 0.3478 *	* 0.3218 *	* F-SUB-Q			
	* 4.4463 *	* 4.4922 *	* 4.6168 *	* 5.2126 *	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 74 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.3980	* 0.5095	* 0.6273	* 0.5745	* 0.6672	* 0.5692	* 0.5941	* 0.3275
	* 4.1362	* 4.0037	* 3.2261	* 3.4996	* 3.0118	* 3.5433	* 3.4412	* 5.6432
9	* 0.5095	* 0.5851	* 0.5478	* 0.6485	* 0.5867	* 0.5763	* 0.5948	* 0.3358
	* 4.0037	* 3.5082	* 3.7128	* 3.1131	* 3.4255	* 3.5086	* 3.4377	* 5.5408
10	* 0.6273	* 0.5468	* 0.5503	* 0.5957	* 0.6415	* 0.5653	* 0.5659	* 0.3064
	* 3.2261	* 3.7167	* 3.7579	* 3.4073	* 3.1420	* 3.5503	* 3.5373	* 5.9231
11	* 0.5745	* 0.6472	* 0.5943	* 0.6139	* 0.5485	* 0.5691	* 0.5089	* 0.2654
	* 3.4996	* 3.1174	* 3.4147	* 3.3319	* 3.6974	* 3.5149	* 3.9202	* 6.7853
12	* 0.6672	* 0.5864	* 0.6406	* 0.5479	* 0.4091	* 0.4401	* 0.3397	*
	* 3.0118	* 3.4273	* 3.1459	* 3.7010	* 4.1284	* 3.8947	* 5.0826	*
13	* 0.5692	* 0.5761	* 0.5648	* 0.5687	* 0.4396	* 0.2894	* 0.1724	*
	* 3.5433	* 3.5103	* 3.5532	* 3.5173	* 3.8974	* 5.2345	* 9.1937	*
14	* 0.5941	* 0.5947	* 0.5655	* 0.5085	* 0.3392	* 0.1676	*	*
	* 3.4412	* 3.4388	* 3.5394	* 3.9234	* 5.0890	* 9.3710	*	*
15	* 0.3275	* 0.3357	* 0.3062	* 0.2651	* F-SUB-Q			
	* 5.6432	* 5.5418	* 5.9266	* 6.7915	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.8377	* 1.0544	* 1.3928	* 1.1922	* 1.4941	* 1.2406	* 1.4494	* 0.7283
	* 2.0280	* 1.9906	* 1.4954	* 1.7394	* 1.3865	* 1.6743	* 1.4504	* 2.6162
9	* 1.0544	* 1.3457	* 1.1358	* 1.4239	* 1.2222	* 1.3403	* 1.4558	* 0.7474
	* 1.9906	* 1.5644	* 1.8395	* 1.4614	* 1.6958	* 1.5522	* 1.4307	* 2.5438
10	* 1.3928	* 1.1338	* 1.2476	* 1.2811	* 1.4016	* 1.2867	* 1.3957	* 0.6802
	* 1.4954	* 1.8427	* 1.6998	* 1.6281	* 1.4829	* 1.6090	* 1.4763	* 2.7427
11	* 1.1922	* 1.4212	* 1.2780	* 1.3447	* 1.1977	* 1.3239	* 1.2476	* 0.6045
	* 1.7394	* 1.4633	* 1.6320	* 1.5575	* 1.7033	* 1.5390	* 1.6473	* 3.0745
12	* 1.4941	* 1.2217	* 1.3999	* 1.1965	* 0.9032	* 1.0721	* 0.7545	*
	* 1.3865	* 1.6965	* 1.4846	* 1.7043	* 1.8011	* 1.6133	* 2.3379	*
13	* 1.2406	* 1.3398	* 1.2859	* 1.3229	* 1.0710	* 0.6212	* 0.3856	*
	* 1.6743	* 1.5528	* 1.6101	* 1.5399	* 1.6144	* 2.4804	* 4.2021	*
14	* 1.4494	* 1.4554	* 1.3950	* 1.2467	* 0.7533	* 0.3744	*	*
	* 1.4504	* 1.4311	* 1.4771	* 1.6487	* 2.3410	* 4.2895	*	*
15	* 0.7283	* 0.7473	* 0.6799	* 0.6040	* F-SUB-Q			
	* 2.6162	* 2.5445	* 2.7443	* 3.0770	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 75 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9724	* 1.1573	* 1.2685	* 1.3088	* 1.4449	* 1.4321	* 1.4864	* 0.8026
	* 1.7797	* 1.7972	* 1.6794	* 1.6216	* 1.4665	* 1.4791	* 1.4241	* 2.3856
9	* 1.1573	* 1.4182	* 1.2954	* 1.4656	* 1.3879	* 1.5406	* 1.4996	* 0.8267
	* 1.7972	* 1.5145	* 1.6530	* 1.4543	* 1.5274	* 1.3735	* 1.4087	* 2.3294
10	* 1.2685	* 1.2897	* 1.4525	* 1.4233	* 1.4885	* 1.4891	* 1.4865	* 0.7673
	* 1.6794	* 1.6604	* 1.4776	* 1.4985	* 1.4254	* 1.4236	* 1.4200	* 2.4821
11	* 1.3088	* 1.4628	* 1.4197	* 1.4393	* 1.3317	* 1.3652	* 1.3851	* 0.6939
	* 1.6216	* 1.4570	* 1.5023	* 1.4892	* 1.5340	* 1.5531	* 1.5243	* 2.7473
12	* 1.4449	* 1.3874	* 1.4874	* 1.3305	* 1.0505	* 1.1410	* 0.8350	*
	* 1.4665	* 1.5280	* 1.4265	* 1.5344	* 1.5380	* 1.5505	* 2.1610	*
13	* 1.4321	* 1.5400	* 1.4883	* 1.3643	* 1.1399	* 0.7100	* 0.4425	*
	* 1.4791	* 1.3739	* 1.4244	* 1.5544	* 1.5514	* 2.2221	* 3.7603	*
14	* 1.4864	* 1.4991	* 1.4858	* 1.3840	* 0.8340	* 0.4329	*	*
	* 1.4241	* 1.4092	* 1.4207	* 1.5256	* 2.1631	* 3.8099	*	*
15	* 0.8026	* 0.8266	* 0.7668	* 0.6933	* F-SUB-Q			
	* 2.3856	* 2.3297	* 2.4836	* 2.7495	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0348	* 1.2078	* 1.3182	* 1.3491	* 1.5511	* 1.5231	* 1.6016	* 0.8145
	* 1.7152	* 1.7492	* 1.4954	* 1.6188	* 1.3865	* 1.4254	* 1.3519	* 2.3856
9	* 1.2078	* 1.5243	* 1.3638	* 1.5525	* 1.4638	* 1.6620	* 1.6190	* 0.8413
	* 1.7492	* 1.4530	* 1.6163	* 1.4147	* 1.4876	* 1.3041	* 1.3368	* 2.3294
10	* 1.3182	* 1.3571	* 1.5542	* 1.4993	* 1.6034	* 1.6014	* 1.6133	* 0.7847
	* 1.4954	* 1.6244	* 1.4205	* 1.4660	* 1.3626	* 1.3616	* 1.3452	* 2.4821
11	* 1.3491	* 1.5493	* 1.4952	* 1.5458	* 1.4157	* 1.4831	* 1.5008	* 0.7175
	* 1.6188	* 1.4176	* 1.4701	* 1.4305	* 1.4733	* 1.4778	* 1.4534	* 2.7424
12	* 1.5511	* 1.4633	* 1.6022	* 1.4144	* 1.1234	* 1.2358	* 0.8603	*
	* 1.3865	* 1.4881	* 1.3637	* 1.4737	* 1.4669	* 1.4759	* 2.1610	*
13	* 1.5231	* 1.6614	* 1.6006	* 1.4819	* 1.2346	* 0.7582	* 0.4602	*
	* 1.4254	* 1.3045	* 1.3623	* 1.4788	* 1.4767	* 2.1758	* 3.7603	*
14	* 1.6016	* 1.6185	* 1.6125	* 1.4995	* 0.8596	* 0.4500	*	*
	* 1.3519	* 1.3373	* 1.3459	* 1.4547	* 2.1631	* 3.8099	*	*
15	* 0.8145	* 0.8412	* 0.7841	* 0.7169	* F-SUB-Q			
	* 2.3856	* 2.3297	* 2.4836	* 2.7448	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 76 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0774	* 1.2346	* 1.3424	* 1.3571	* 1.5885	* 1.5491	* 1.6498	* 0.8212
	* 1.7524	* 1.7898	* 1.7093	* 1.6648	* 1.4130	* 1.4465	* 1.3552	* 2.4595
9	* 1.2346	* 1.5634	* 1.3803	* 1.5902	* 1.4818	* 1.7054	* 1.6710	* 0.8521
	* 1.7898	* 1.4791	* 1.6624	* 1.4326	* 1.5170	* 1.3125	* 1.3385	* 2.3875
10	* 1.3424	* 1.3729	* 1.5828	* 1.5292	* 1.6504	* 1.6433	* 1.6713	* 0.7976
	* 1.7093	* 1.6715	* 1.4524	* 1.4930	* 1.3692	* 1.3687	* 1.3413	* 2.5354
11	* 1.3571	* 1.5867	* 1.5249	* 1.5907	* 1.4660	* 1.5485	* 1.5686	* 0.7339
	* 1.6648	* 1.4358	* 1.4975	* 1.4500	* 1.4893	* 1.4730	* 1.4447	* 2.7718
12	* 1.5885	* 1.4812	* 1.6490	* 1.4646	* 1.1830	* 1.3150	* 0.8947	*
	* 1.4130	* 1.5175	* 1.3703	* 1.4897	* 1.4828	* 1.4765	* 2.2052	*
13	* 1.5491	* 1.7048	* 1.6424	* 1.5473	* 1.3137	* 0.8123	* 0.4801	*
	* 1.4465	* 1.3130	* 1.3694	* 1.4743	* 1.4774	* 2.1975	* 3.8642	*
14	* 1.6498	* 1.6704	* 1.6704	* 1.5673	* 0.8941	* 0.4696	*	*
	* 1.3552	* 1.3391	* 1.3421	* 1.4461	* 2.2064	* 3.9170	*	*
15	* 0.8212	* 0.8520	* 0.7970	* 0.7331	* F-SUB-Q			
	* 2.4595	* 2.3879	* 2.5376	* 2.7743	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1682	* 1.2668	* 1.3563	* 1.3590	* 1.6022	* 1.5588	* 1.6716	* 0.8263
	* 1.8130	* 1.8522	* 1.7662	* 1.7245	* 1.4477	* 1.4810	* 1.3779	* 2.5191
9	* 1.2668	* 1.5852	* 1.3880	* 1.6103	* 1.4894	* 1.7254	* 1.6973	* 0.8592
	* 1.8522	* 1.5272	* 1.7212	* 1.4725	* 1.5650	* 1.3374	* 1.3596	* 2.4407
10	* 1.3563	* 1.3828	* 1.5973	* 1.5492	* 1.6751	* 1.6683	* 1.7039	* 0.8084
	* 1.7662	* 1.7311	* 1.4987	* 1.5373	* 1.4038	* 1.4003	* 1.3654	* 2.5952
11	* 1.3590	* 1.6065	* 1.5446	* 1.6184	* 1.5182	* 1.5991	* 1.6189	* 0.7481
	* 1.7245	* 1.4760	* 1.5423	* 1.4906	* 1.5295	* 1.5049	* 1.4730	* 2.8425
12	* 1.6022	* 1.4883	* 1.6735	* 1.5167	* 1.2922	* 1.4231	* 0.9364	*
	* 1.4477	* 1.5656	* 1.4051	* 1.5299	* 1.5245	* 1.5096	* 2.2502	*
13	* 1.5588	* 1.7246	* 1.6672	* 1.5977	* 1.4220	* 0.9023	* 0.5078	*
	* 1.4810	* 1.3380	* 1.4012	* 1.5063	* 1.5106	* 2.2581	* 3.9848	*
14	* 1.6716	* 1.6965	* 1.7028	* 1.6173	* 0.9357	* 0.4963	*	*
	* 1.3779	* 1.3602	* 1.3663	* 1.4745	* 2.2515	* 4.0417	*	*
15	* 0.8263	* 0.8590	* 0.8076	* 0.7473	* F-SUB-Q			
	* 2.5191	* 2.4411	* 2.5975	* 2.8453	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 77 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3037	* 1.3124	* 1.3896	* 1.3708	* 1.6297	* 1.5789	* 1.7059	* 0.8271
	* 1.8666	* 1.9057	* 1.8269	* 1.7915	* 1.4866	* 1.5211	* 1.4062	* 2.6174
9	* 1.3124	* 1.6233	* 1.4082	* 1.6441	* 1.5087	* 1.7560	* 1.7363	* 0.8612
	* 1.9057	* 1.5776	* 1.7883	* 1.5171	* 1.6206	* 1.3706	* 1.3882	* 2.5341
10	* 1.3896	* 1.4047	* 1.6254	* 1.5806	* 1.7139	* 1.7053	* 1.7493	* 0.8144
	* 1.8269	* 1.7992	* 1.5525	* 1.5892	* 1.4423	* 1.4382	* 1.3948	* 2.6997
11	* 1.3708	* 1.6400	* 1.5756	* 1.6617	* 1.5879	* 1.6649	* 1.6808	* 0.7570
	* 1.7915	* 1.5209	* 1.5947	* 1.5262	* 1.5626	* 1.5183	* 1.5067	* 2.9636
12	* 1.6297	* 1.5075	* 1.7122	* 1.5865	* 1.5185	* 1.5630	* 0.9714	
	* 1.4866	* 1.6213	* 1.4438	* 1.5631	* 1.5596	* 1.5358	* 2.3184	
13	* 1.5789	* 1.7551	* 1.7041	* 1.6634	* 1.5618	* 1.0024	* 0.5334	
	* 1.5211	* 1.3713	* 1.4393	* 1.5197	* 1.5369	* 2.3248	* 4.1389	
14	* 1.7059	* 1.7353	* 1.7481	* 1.6791	* 0.9708	* 0.5207	*	
	* 1.4062	* 1.3889	* 1.3958	* 1.5082	* 2.3197	* 4.2041	*	
15	* 0.8271	* 0.8611	* 0.8136	* 0.7561	* F-SUB-Q			
	* 2.6174	* 2.5346	* 2.7023	* 2.9667	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3766	* 1.3588	* 1.4099	* 1.3764	* 1.6445	* 1.5928	* 1.7262	* 0.8282
	* 1.9342	* 1.9772	* 1.9201	* 1.8859	* 1.5530	* 1.5868	* 1.4618	* 2.7467
9	* 1.3588	* 1.6478	* 1.4224	* 1.6647	* 1.5204	* 1.7754	* 1.7607	* 0.8632
	* 1.9772	* 1.6551	* 1.8840	* 1.5890	* 1.7015	* 1.4275	* 1.4433	* 2.6581
10	* 1.4099	* 1.4188	* 1.6436	* 1.6018	* 1.7382	* 1.7313	* 1.7793	* 0.8201
	* 1.9201	* 1.8958	* 1.6320	* 1.6669	* 1.5069	* 1.5000	* 1.4503	* 2.8331
11	* 1.3764	* 1.6604	* 1.5965	* 1.6902	* 1.6377	* 1.7125	* 1.7255	* 0.7655
	* 1.8859	* 1.5932	* 1.6727	* 1.5636	* 1.6045	* 1.5564	* 1.5433	* 3.1130
12	* 1.6445	* 1.5191	* 1.7363	* 1.6366	* 1.6201	* 1.6533	* 1.0015	*
	* 1.5530	* 1.7023	* 1.5086	* 1.6050	* 1.6004	* 1.5702	* 2.3871	*
13	* 1.5928	* 1.7745	* 1.7299	* 1.7107	* 1.6520	* 1.0676	* 0.5549	*
	* 1.5868	* 1.4283	* 1.5013	* 1.5579	* 1.5714	* 2.3975	* 4.2745	*
14	* 1.7262	* 1.7596	* 1.7779	* 1.7236	* 1.0008	* 0.5410	*	
	* 1.4618	* 1.4441	* 1.4515	* 1.5450	* 2.3884	* 4.3469	*	
15	* 0.8282	* 0.8629	* 0.8193	* 0.7645	* F-SUB-Q			
	* 2.7467	* 2.6588	* 2.8361	* 3.1165	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 78 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4084	* 1.3835	* 1.4289	* 1.3835	* 1.6632	* 1.6079	* 1.7491	* 0.8280 *
	* 2.0295	* 2.0722	* 2.0083	* 1.9958	* 1.6301	* 1.6666	* 1.5287	* 2.9085 *
9	* 1.3835	* 1.6721	* 1.4355	* 1.6867	* 1.5328	* 1.7967	* 1.7887	* 0.8621 *
	* 2.0722	* 1.7155	* 1.9949	* 1.6718	* 1.7965	* 1.4962	* 1.5098	* 2.8180 *
10	* 1.4289	* 1.4317	* 1.6619	* 1.6221	* 1.7644	* 1.7565	* 1.8098	* 0.8234 *
	* 2.0083	* 2.0024	* 1.7171	* 1.7550	* 1.5820	* 1.5743	* 1.5169	* 2.9994 *
11	* 1.3835	* 1.6822	* 1.6166	* 1.7319	* 1.6823	* 1.7540	* 1.7651	* 0.7694 *
	* 1.9958	* 1.6764	* 1.7610	* 1.6195	* 1.6668	* 1.6079	* 1.5893	* 3.3035 *
12	* 1.6632	* 1.5314	* 1.7624	* 1.6818	* 1.6734	* 1.7109	* 1.0192	*
	* 1.6301	* 1.7974	* 1.5839	* 1.6673	* 1.6643	* 1.6245	* 2.4950	*
13	* 1.6079	* 1.7956	* 1.7547	* 1.7522	* 1.7095	* 1.1006	* 0.5676	*
	* 1.6666	* 1.4972	* 1.5759	* 1.6096	* 1.6257	* 2.5031	* 4.4725	*
14	* 1.7491	* 1.7872	* 1.8082	* 1.7630	* 1.0186	* 0.5527	*	*
	* 1.5287	* 1.5107	* 1.5182	* 1.5912	* 2.4964	* 4.5539	*	*
15	* 0.8280	* 0.8619	* 0.8225	* 0.7684	* F-SUB-Q			
	* 2.9084	* 2.8188	* 3.0027	* 3.3074	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4020	* 1.3753	* 1.4119	* 1.3685	* 1.6428	* 1.5966	* 1.7317	* 0.8298 *
	* 2.1633	* 2.2038	* 2.1376	* 2.1568	* 1.7619	* 1.7908	* 1.6464	* 3.0920 *
9	* 1.3753	* 1.6538	* 1.4227	* 1.6698	* 1.5203	* 1.7848	* 1.7754	* 0.8666 *
	* 2.2038	* 1.8242	* 2.1210	* 1.7944	* 1.9383	* 1.6075	* 1.6248	* 2.9867 *
10	* 1.4119	* 1.4189	* 1.6485	* 1.6119	* 1.7570	* 1.7481	* 1.7972	* 0.8282 *
	* 2.1376	* 2.1267	* 1.8221	* 1.8590	* 1.6918	* 1.6923	* 1.6329	* 3.1847 *
11	* 1.3685	* 1.6652	* 1.6063	* 1.7300	* 1.6837	* 1.7474	* 1.7602	* 0.7775 *
	* 2.1568	* 1.7993	* 1.8655	* 1.7225	* 1.7694	* 1.6964	* 1.6756	* 3.4452 *
12	* 1.6428	* 1.5188	* 1.7549	* 1.6832	* 1.6781	* 1.7133	* 1.0385	*
	* 1.7619	* 1.9392	* 1.6937	* 1.7699	* 1.7725	* 1.7302	* 2.5933	*
13	* 1.5966	* 1.7835	* 1.7461	* 1.7454	* 1.7120	* 1.1180	* 0.5791	*
	* 1.7908	* 1.6086	* 1.6942	* 1.6984	* 1.7316	* 2.6380	* 4.6836	*
14	* 1.7317	* 1.7737	* 1.7954	* 1.7580	* 1.0376	* 0.5641	*	*
	* 1.6464	* 1.6259	* 1.6345	* 1.6776	* 2.5952	* 4.7674	*	*
15	* 0.8298	* 0.8664	* 0.8272	* 0.7764	* F-SUB-Q			
	* 3.0920	* 2.9876	* 3.1881	* 3.4496	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 79 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4162	* 1.3871	* 1.4316	* 1.3777	* 1.6703	* 1.6162	* 1.7643	* 0.8239
	* 2.2627	* 2.3089	* 2.2287	* 2.2946	* 1.8556	* 1.8939	* 1.7288	* 3.3266
9	* 1.3871	* 1.6789	* 1.4346	* 1.6960	* 1.5337	* 1.8123	* 1.8105	* 0.8596
	* 2.3089	* 1.8997	* 2.2250	* 1.8683	* 2.0590	* 1.6949	* 1.7069	* 3.2172
10	* 1.4316	* 1.4306	* 1.6672	* 1.6320	* 1.7928	* 1.7753	* 1.8341	* 0.8241
	* 2.2287	* 2.2312	* 1.9058	* 1.9422	* 1.7522	* 1.7632	* 1.7023	* 3.4223
11	* 1.3777	* 1.6912	* 1.6261	* 1.7671	* 1.7121	* 1.7861	* 1.7981	* 0.7730
	* 2.2946	* 1.8735	* 1.9492	* 1.7802	* 1.8376	* 1.7542	* 1.7338	* 3.6617
12	* 1.6703	* 1.5322	* 1.7906	* 1.7115	* 1.7084	* 1.7529	* 1.0346	
	* 1.8556	* 2.0604	* 1.7543	* 1.8381	* 1.8377	* 1.7849	* 2.7483	
13	* 1.6162	* 1.8109	* 1.7730	* 1.7840	* 1.7514	* 1.1244	* 0.5768	
	* 1.8939	* 1.6962	* 1.7654	* 1.7563	* 1.7863	* 2.7744	* 4.9566	
14	* 1.7643	* 1.8087	* 1.8321	* 1.7957	* 1.0337	* 0.5608		
	* 1.7288	* 1.7081	* 1.7041	* 1.7361	* 2.7500	* 5.0549		
15	* 0.8239	* 0.8593	* 0.8230	* 0.7718	* F-SUB-Q			
	* 3.3266	* 3.2182	* 3.4265	* 3.6666	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4106	* 1.3805	* 1.4268	* 1.3708	* 1.6696	* 1.6160	* 1.7673	* 0.8199 *
	* 2.3700	* 2.4139	* 2.3233	* 2.4100	* 1.9779	* 2.0297	* 1.8483	* 3.5750 *
9	* 1.3805	* 1.6748	* 1.4282	* 1.6943	* 1.5290	* 1.8152	* 1.8154	* 0.8563 *
	* 2.4139	* 1.9830	* 2.3231	* 1.9564	* 2.1643	* 1.8131	* 1.8236	* 3.4535 *
10	* 1.4268	* 1.4242	* 1.6627	* 1.6303	* 1.7972	* 1.7779	* 1.8396	* 0.8216 *
	* 2.3233	* 2.3297	* 1.9983	* 2.0359	* 1.8515	* 1.8653	* 1.8000	* 3.6456 *
11	* 1.3708	* 1.6893	* 1.6242	* 1.7717	* 1.7145	* 1.7925	* 1.8056	* 0.7713 *
	* 2.4100	* 1.9622	* 2.0435	* 1.8840	* 1.9476	* 1.8556	* 1.8332	* 3.8880 *
12	* 1.6696	* 1.5274	* 1.7948	* 1.7139	* 1.7120	* 1.7601	* 1.0349 *	
	* 1.9779	* 2.1665	* 1.8540	* 1.9482	* 1.9460	* 1.8859	* 2.9144 *	
13	* 1.6160	* 1.8136	* 1.7753	* 1.7902	* 1.7586	* 1.1258	* 0.5764 *	
	* 2.0297	* 1.8146	* 1.8679	* 1.8579	* 1.8874	* 2.9374	* 5.2542 *	
14	* 1.7673	* 1.8133	* 1.8374	* 1.8030	* 1.0340	* 0.5599 *		
	* 1.8483	* 1.8256	* 1.8020	* 1.8357	* 2.9162	* 5.3629 *		
15	* 0.8199	* 0.8559	* 0.8204	* 0.7701	* F-SUB-Q			
	* 3.5750	* 3.4547	* 3.6503	* 3.8935	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 80 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3887	* 1.3585	* 1.4009	* 1.3496	* 1.6438	* 1.5986	* 1.7445	* 0.8166
	* 2.3634	* 2.4077	* 2.3217	* 2.3998	* 1.9696	* 2.0246	* 1.8559	* 3.5935
9	* 1.3585	* 1.6457	* 1.4064	* 1.6684	* 1.5086	* 1.7965	* 1.7940	* 0.8546
	* 2.4077	* 1.9806	* 2.3148	* 1.9500	* 2.1519	* 1.8054	* 1.8111	* 3.4576
10	* 1.4009	* 1.4022	* 1.6388	* 1.6097	* 1.7752	* 1.7593	* 1.8179	* 0.8197
	* 2.3217	* 2.3215	* 1.9905	* 2.0243	* 1.8423	* 1.8505	* 1.7891	* 3.5976
11	* 1.3496	* 1.6633	* 1.6035	* 1.7499	* 1.6960	* 1.7713	* 1.7864	* 0.7706
	* 2.3998	* 1.9559	* 2.0321	* 1.8804	* 1.9410	* 1.8465	* 1.8288	* 3.8431
12	* 1.6438	* 1.5069	* 1.7727	* 1.6954	* 1.6944	* 1.7404	* 1.0384	*
	* 1.9696	* 2.1542	* 1.8449	* 1.9416	* 1.9502	* 1.8927	* 2.8758	*
13	* 1.5986	* 1.7948	* 1.7566	* 1.7688	* 1.7389	* 1.1233	* 0.5773	*
	* 2.0246	* 1.8071	* 1.8534	* 1.8491	* 1.8945	* 2.9357	* 5.2473	*
14	* 1.7445	* 1.7918	* 1.8156	* 1.7837	* 1.0374	* 0.5608	*	*
	* 1.8559	* 1.8133	* 1.7914	* 1.8316	* 2.8784	* 5.3549	*	*
15	* 0.8166	* 0.8543	* 0.8185	* 0.7693	* F-SUB-Q			
	* 3.5935	* 3.4591	* 3.6028	* 3.8493	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3891	* 1.3573	* 1.4080	* 1.3489	* 1.6596	* 1.6081	* 1.7658	* 0.8058
	* 2.2965	* 2.3349	* 2.2313	* 2.3227	* 1.8930	* 1.9481	* 1.7754	* 3.4964
9	* 1.3573	* 1.6563	* 1.4066	* 1.6809	* 1.5104	* 1.8122	* 1.8163	* 0.8422
	* 2.3349	* 1.9089	* 2.2443	* 1.8825	* 2.0891	* 1.7408	* 1.7421	* 3.3730
10	* 1.4080	* 1.4023	* 1.6434	* 1.6164	* 1.7943	* 1.7732	* 1.8414	* 0.8099
	* 2.2313	* 2.2508	* 1.9333	* 1.9634	* 1.7835	* 1.7910	* 1.7216	* 3.5233
11	* 1.3489	* 1.6756	* 1.6100	* 1.7681	* 1.7060	* 1.7938	* 1.8081	* 0.7597
	* 2.3227	* 1.8882	* 1.9712	* 1.8251	* 1.8928	* 1.7853	* 1.7675	* 3.7762
12	* 1.6596	* 1.5087	* 1.7917	* 1.7055	* 1.7058	* 1.7601	* 1.0239	*
	* 1.8930	* 2.0914	* 1.7860	* 1.8934	* 1.9018	* 1.8354	* 2.8432	*
13	* 1.6081	* 1.8104	* 1.7702	* 1.7911	* 1.7585	* 1.1159	* 0.5681	*
	* 1.9481	* 1.7425	* 1.7940	* 1.7879	* 1.8371	* 2.8832	* 5.1379	*
14	* 1.7658	* 1.8139	* 1.8388	* 1.8052	* 1.0230	* 0.5509	*	*
	* 1.7754	* 1.7443	* 1.7239	* 1.7703	* 2.8453	* 5.2528	*	*
15	* 0.8058	* 0.8418	* 0.8086	* 0.7584	* F-SUB-Q			
	* 3.4964	* 3.3745	* 3.5287	* 3.7825	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 81 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3781	* 1.3456	* 1.3992	* 1.3380	* 1.6553	* 1.6041	* 1.7659	* 0.7970
	* 2.1155	* 2.1535	* 2.0580	* 2.1535	* 1.7546	* 1.8116	* 1.6468	* 3.2626
9	* 1.3456	* 1.6476	* 1.3957	* 1.6744	* 1.5005	* 1.8107	* 1.8173	* 0.8332
	* 2.1535	* 1.7580	* 2.0728	* 1.7392	* 1.9424	* 1.6176	* 1.6144	* 3.1458
10	* 1.3992	* 1.3913	* 1.6333	* 1.6089	* 1.7924	* 1.7704	* 1.8429	* 0.8022
	* 2.0580	* 2.0789	* 1.7889	* 1.8158	* 1.6453	* 1.6631	* 1.5940	* 3.2714
11	* 1.3380	* 1.6689	* 1.6022	* 1.7653	* 1.7003	* 1.7946	* 1.8094	* 0.7510
	* 2.1535	* 1.7445	* 1.8229	* 1.6827	* 1.7497	* 1.6462	* 1.6282	* 3.5064
12	* 1.6553	* 1.4987	* 1.7897	* 1.6998	* 1.7010	* 1.7592	* 1.0148	*
	* 1.7546	* 1.9445	* 1.6477	* 1.7501	* 1.7602	* 1.6906	* 2.6302	*
13	* 1.6041	* 1.8087	* 1.7671	* 1.7918	* 1.7575	* 1.1070	* 0.5617	*
	* 1.8116	* 1.6193	* 1.6659	* 1.6487	* 1.6922	* 2.6678	* 4.7748	*
14	* 1.7659	* 1.8148	* 1.8402	* 1.8064	* 1.0138	* 0.5441	*	*
	* 1.6468	* 1.6165	* 1.5961	* 1.6308	* 2.6321	* 4.8869	*	*
15	* 0.7970	* 0.8328	* 0.8008	* 0.7496	* F-SUB-Q			
	* 3.2626	* 3.1473	* 3.2765	* 3.5126	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3625	* 1.3297	* 1.3840	* 1.3228	* 1.6418	* 1.5927	* 1.7550	* 0.7905
	* 1.9737	* 2.0111	* 1.9233	* 2.0119	* 1.6308	* 1.6833	* 1.5291	* 3.0402
9	* 1.3297	* 1.6309	* 1.3801	* 1.6596	* 1.4856	* 1.8001	* 1.8068	* 0.8275
	* 2.0111	* 1.6408	* 1.9371	* 1.6229	* 1.8143	* 1.4996	* 1.4996	* 2.9263
10	* 1.3840	* 1.3757	* 1.6172	* 1.5951	* 1.7802	* 1.7587	* 1.8325	* 0.7963
	* 1.9233	* 1.9430	* 1.6696	* 1.6930	* 1.5302	* 1.5478	* 1.4825	* 3.0484
11	* 1.3228	* 1.6541	* 1.5883	* 1.7528	* 1.6872	* 1.7836	* 1.7991	* 0.7470
	* 2.0119	* 1.6280	* 1.6998	* 1.5639	* 1.6267	* 1.5293	* 1.5121	* 3.2617
12	* 1.6418	* 1.4838	* 1.7774	* 1.6867	* 1.6883	* 1.7479	* 1.0094	*
	* 1.6308	* 1.8164	* 1.5325	* 1.6272	* 1.6355	* 1.5690	* 2.4406	*
13	* 1.5927	* 1.7980	* 1.7552	* 1.7807	* 1.7461	* 1.1006	* 0.5576	*
	* 1.6833	* 1.5012	* 1.5507	* 1.5317	* 1.5705	* 2.4747	* 4.4396	*
14	* 1.7550	* 1.8041	* 1.8296	* 1.7959	* 1.0084	* 0.5400	*	*
	* 1.5291	* 1.5014	* 1.4847	* 1.5147	* 2.4426	* 4.5452	*	*
15	* 0.7905	* 0.8271	* 0.7949	* 0.7455	* F-SUB-Q			
	* 3.0402	* 2.9278	* 3.0535	* 3.2677	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 82 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3408	* 1.3082	* 1.3589	* 1.3021	* 1.6149	* 1.5729	* 1.7294	* 0.7865
	* 2.0129	* 2.0524	* 1.9678	* 2.0477	* 1.6631	* 1.7105	* 1.5573	* 3.0722
9	* 1.3082	* 1.6020	* 1.3584	* 1.6325	* 1.4641	* 1.7782	* 1.7815	* 0.8252
	* 2.0524	* 1.6776	* 1.9753	* 1.6550	* 1.8425	* 1.5219	* 1.5235	* 2.9493
10	* 1.3589	* 1.3540	* 1.5924	* 1.5727	* 1.7536	* 1.7363	* 1.8067	* 0.7928
	* 1.9678	* 1.9814	* 1.7027	* 1.7235	* 1.5615	* 1.5699	* 1.5052	* 3.0664
11	* 1.3021	* 1.6269	* 1.5659	* 1.7261	* 1.6642	* 1.7578	* 1.7747	* 0.7446
	* 2.0477	* 1.6604	* 1.7307	* 1.5946	* 1.6555	* 1.5590	* 1.5398	* 3.2854
12	* 1.6149	* 1.4622	* 1.7508	* 1.6637	* 1.6654	* 1.7225	* 1.0092	*
	* 1.6631	* 1.8447	* 1.5639	* 1.6560	* 1.6632	* 1.5974	* 2.4525	*
13	* 1.5729	* 1.7761	* 1.7328	* 1.7548	* 1.7207	* 1.0942	* 0.5562	*
	* 1.7105	* 1.5236	* 1.5730	* 1.5615	* 1.5990	* 2.4977	* 4.4740	*
14	* 1.7294	* 1.7788	* 1.8037	* 1.7715	* 1.0080	* 0.5389	*	*
	* 1.5573	* 1.5256	* 1.5075	* 1.5425	* 2.4549	* 4.5783	*	*
15	* 0.7865	* 0.8247	* 0.7914	* 0.7430	* F-SUB-Q			
	* 3.0722	* 2.9509	* 3.0716	* 3.2917	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3448	* 1.3108	* 1.3703	* 1.3045	* 1.6335	* 1.5828	* 1.7517	* 0.7752
	* 1.8640	* 1.9076	* 1.8204	* 1.9129	* 1.5399	* 1.5922	* 1.4403	* 2.9247
9	* 1.3108	* 1.6174	* 1.3622	* 1.6481	* 1.4677	* 1.7946	* 1.8041	* 0.8117
	* 1.9076	* 1.5496	* 1.8375	* 1.5316	* 1.7187	* 1.4115	* 1.4065	* 2.8129
10	* 1.3703	* 1.3576	* 1.6003	* 1.5817	* 1.7729	* 1.7498	* 1.8301	* 0.7818
	* 1.8204	* 1.8434	* 1.5805	* 1.5993	* 1.4406	* 1.4547	* 1.3882	* 2.9098
11	* 1.3045	* 1.6424	* 1.5747	* 1.7445	* 1.6741	* 1.7799	* 1.7949	* 0.7312
	* 1.9129	* 1.5367	* 1.6061	* 1.4738	* 1.5368	* 1.4353	* 1.4192	* 3.1235
12	* 1.6335	* 1.4658	* 1.7700	* 1.6736	* 1.6758	* 1.7408	* 0.9914	*
	* 1.5399	* 1.7207	* 1.4429	* 1.5373	* 1.5399	* 1.4759	* 2.3327	*
13	* 1.5828	* 1.7924	* 1.7460	* 1.7768	* 1.7390	* 1.0833	* 0.5456	*
	* 1.5922	* 1.4131	* 1.4577	* 1.4377	* 1.4774	* 2.3567	* 4.2676	*
14	* 1.7518	* 1.8012	* 1.8270	* 1.7916	* 0.9904	* 0.5275	*	*
	* 1.4403	* 1.4087	* 1.3904	* 1.4218	* 2.3345	* 4.3762	*	*
15	* 0.7752	* 0.8112	* 0.7803	* 0.7296	* F-SUB-Q			
	* 2.9247	* 2.8144	* 2.9149	* 3.1296	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 83 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3381	* 1.3034	* 1.3636	* 1.2972	* 1.6277	* 1.5773	* 1.7463	* 0.7689 *
	* 1.7580	* 1.8042	* 1.7255	* 1.8179	* 1.4605	* 1.5101	* 1.3654	* 2.7913 *
9	* 1.3034	* 1.6107	* 1.3556	* 1.6415	* 1.4604	* 1.7905	* 1.7986	* 0.8054 *
	* 1.8042	* 1.4665	* 1.7414	* 1.4512	* 1.6310	* 1.3361	* 1.3315	* 2.6831 *
10	* 1.3636	* 1.3510	* 1.5942	* 1.5759	* 1.7660	* 1.7441	* 1.8244	* 0.7755 *
	* 1.7255	* 1.7471	* 1.4957	* 1.5135	* 1.3613	* 1.3763	* 1.3134	* 2.7716 *
11	* 1.2972	* 1.6357	* 1.5688	* 1.7379	* 1.6672	* 1.7735	* 1.7871	* 0.7248 *
	* 1.8179	* 1.4561	* 1.5201	* 1.3889	* 1.4484	* 1.3552	* 1.3412	* 2.9730 *
12	* 1.6277	* 1.4585	* 1.7629	* 1.6667	* 1.6688	* 1.7330	* 0.9836	*
	* 1.4605	* 1.6330	* 1.3635	* 1.4488	* 1.4489	* 1.3909	* 2.2097	*
13	* 1.5773	* 1.7882	* 1.7402	* 1.7703	* 1.7311	* 1.0753	* 0.5406	*
	* 1.5101	* 1.3377	* 1.3792	* 1.3575	* 1.3923	* 2.2278	* 4.0464	*
14	* 1.7463	* 1.7957	* 1.8212	* 1.7837	* 0.9826	* 0.5225	*	
	* 1.3654	* 1.3336	* 1.3156	* 1.3437	* 2.2115	* 4.1510	*	
15	* 0.7689	* 0.8049	* 0.7741	* 0.7232	* F-SUB-Q			
	* 2.7913	* 2.6847	* 2.7766	* 2.9790	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3178	* 1.2836	* 1.3345	* 1.2789	* 1.5917	* 1.5528	* 1.7057	* 0.7684 *
	* 1.6979	* 1.7434	* 1.6801	* 1.7588	* 1.4243	* 1.4627	* 1.3328	* 2.6682 *
9	* 1.2836	* 1.5764	* 1.3364	* 1.6073	* 1.4401	* 1.7601	* 1.7574	* 0.8067 *
	* 1.7434	* 1.4271	* 1.6829	* 1.4123	* 1.5765	* 1.2949	* 1.2978	* 2.5582 *
10	* 1.3345	* 1.3319	* 1.5714	* 1.5522	* 1.7260	* 1.7147	* 1.7818	* 0.7743 *
	* 1.6801	* 1.6884	* 1.4450	* 1.4634	* 1.3249	* 1.3325	* 1.2802	* 2.6481 *
11	* 1.2789	* 1.6016	* 1.5452	* 1.6999	* 1.6401	* 1.7308	* 1.7436	* 0.7257 *
	* 1.7588	* 1.4171	* 1.4698	* 1.3489	* 1.3985	* 1.3200	* 1.3069	* 2.8302 *
12	* 1.5917	* 1.4383	* 1.7230	* 1.6396	* 1.6407	* 1.6921	* 0.9860	*
	* 1.4243	* 1.5784	* 1.3270	* 1.3988	* 1.3987	* 1.3521	* 2.0955	*
13	* 1.5528	* 1.7579	* 1.7109	* 1.7277	* 1.6903	* 1.0689	* 0.5418	*
	* 1.4627	* 1.2965	* 1.3353	* 1.3223	* 1.3535	* 2.1273	* 3.8392	*
14	* 1.7057	* 1.7545	* 1.7786	* 1.7402	* 0.9847	* 0.5244	*	
	* 1.3328	* 1.2999	* 1.2824	* 1.3093	* 2.0978	* 3.9322	*	
15	* 0.7684	* 0.8062	* 0.7728	* 0.7241	* F-SUB-Q			
	* 2.6682	* 2.5596	* 2.6528	* 2.8359	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 84 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3202	* 1.2867	* 1.3425	* 1.2894	* 1.5956	* 1.5552	* 1.7053	* 0.7605
	* 1.6292	* 1.6722	* 1.6065	* 1.6783	* 1.3666	* 1.4042	* 1.2818	* 2.5963
9	* 1.2867	* 1.5813	* 1.3425	* 1.6132	* 1.4456	* 1.7620	* 1.7550	* 0.7964
	* 1.6722	* 1.3678	* 1.6110	* 1.3528	* 1.5102	* 1.2429	* 1.2486	* 2.4958
10	* 1.3425	* 1.3380	* 1.5789	* 1.5601	* 1.7256	* 1.7173	* 1.7797	* 0.7643
	* 1.6065	* 1.6162	* 1.3822	* 1.3991	* 1.2724	* 1.2777	* 1.2310	* 2.5818
11	* 1.2894	* 1.6077	* 1.5532	* 1.6998	* 1.6435	* 1.7298	* 1.7367	* 0.7135
	* 1.6783	* 1.3573	* 1.4052	* 1.2947	* 1.3389	* 1.2675	* 1.2593	* 2.7693
12	* 1.5956	* 1.4437	* 1.7227	* 1.6430	* 1.6429	* 1.6876	* 0.9679	
	* 1.3666	* 1.5120	* 1.2745	* 1.3393	* 1.3398	* 1.3004	* 2.0499	
13	* 1.5552	* 1.7597	* 1.7135	* 1.7267	* 1.6858	* 1.0531	* 0.5326	
	* 1.4042	* 1.2444	* 1.2804	* 1.2697	* 1.3017	* 2.0725	* 3.7534	
14	* 1.7053	* 1.7522	* 1.7765	* 1.7333	* 0.9667	* 0.5149		
	* 1.2818	* 1.2505	* 1.2331	* 1.2616	* 2.0521	* 3.8494		
15	* 0.7605	* 0.7959	* 0.7629	* 0.7119	* F-SUB-Q			
	* 2.5963	* 2.4972	* 2.5864	* 2.7749	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2689	* 1.2511	* 1.3295	* 1.2867	* 1.5399	* 1.5081	* 1.6474	* 0.7584
	* 1.6445	* 1.6682	* 1.4199	* 1.6309	* 1.3105	* 1.4037	* 1.2856	* 2.5280
9	* 1.2511	* 1.5338	* 1.3072	* 1.5809	* 1.4108	* 1.6967	* 1.6895	* 0.7923
	* 1.6682	* 1.3672	* 1.6040	* 1.3378	* 1.5002	* 1.2499	* 1.2563	* 2.4358
10	* 1.3295	* 1.3038	* 1.5246	* 1.5338	* 1.6732	* 1.6580	* 1.7122	* 0.7554
	* 1.4199	* 1.6080	* 1.3876	* 1.3789	* 1.2706	* 1.2815	* 1.2391	* 2.5362
11	* 1.2867	* 1.5756	* 1.5273	* 1.6376	* 1.5947	* 1.6714	* 1.6809	* 0.6989
	* 1.6309	* 1.3421	* 1.3847	* 1.3011	* 1.3357	* 1.2513	* 1.2591	* 2.7448
12	* 1.5399	* 1.4091	* 1.6704	* 1.5942	* 1.5811	* 1.6303	* 0.9611	*
	* 1.3105	* 1.5020	* 1.2727	* 1.3360	* 1.3476	* 1.3028	* 2.0010	*
13	* 1.5081	* 1.6947	* 1.6544	* 1.6686	* 1.6286	* 1.0244	* 0.5224	*
	* 1.4037	* 1.2514	* 1.2842	* 1.2532	* 1.3042	* 2.0646	* 3.7160	*
14	* 1.6474	* 1.6868	* 1.7093	* 1.6777	* 0.9597	* 0.5047	*	
	* 1.2856	* 1.2582	* 1.2412	* 1.2614	* 2.0036	* 3.8134	*	
15	* 0.7584	* 0.7919	* 0.7540	* 0.6974	* F-SUB-Q			
	* 2.5280	* 2.4371	* 2.5406	* 2.7503	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 85 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0669	* 1.1118	* 1.4378	* 1.1676	* 1.5695	* 1.2898	* 1.5960	* 0.7016 *
	* 1.9108	* 1.8342	* 1.4199	* 1.7556	* 1.3105	* 1.6013	* 1.2924	* 2.6738 *
9	* 1.1118	* 1.4598	* 1.1343	* 1.5023	* 1.2370	* 1.4649	* 1.6281	* 0.7311 *
	* 1.8342	* 1.4011	* 1.8049	* 1.3705	* 1.6658	* 1.4113	* 1.2686	* 2.5824 *
10	* 1.4378	* 1.1302	* 1.2961	* 1.3704	* 1.5803	* 1.4147	* 1.6099	* 0.6767 *
	* 1.4199	* 1.8076	* 1.5925	* 1.5056	* 1.3103	* 1.4647	* 1.2834	* 2.7696 *
11	* 1.1676	* 1.4949	* 1.3648	* 1.5664	* 1.4089	* 1.6523	* 1.5196	* 0.6212 *
	* 1.7556	* 1.3770	* 1.5116	* 1.3228	* 1.4722	* 1.2513	* 1.3580	* 3.0214 *
12	* 1.5695	* 1.2348	* 1.5774	* 1.4077	* 1.3116	* 1.5328	* 0.8910 *	
	* 1.3105	* 1.6686	* 1.3126	* 1.4735	* 1.5837	* 1.3489	* 2.1089 *	
13	* 1.2898	* 1.4631	* 1.4117	* 1.6497	* 1.5309	* 0.9100	* 0.4644 *	
	* 1.6013	* 1.4130	* 1.4677	* 1.2532	* 1.3505	* 2.2704	* 4.0931 *	
14	* 1.5960	* 1.6259	* 1.6072	* 1.5168	* 0.8889	* 0.4492 *		
	* 1.2924	* 1.2703	* 1.2855	* 1.3605	* 2.1137	* 4.1953 *		
15	* 0.7016	* 0.7305	* 0.6755	* 0.6199	* F-SUB-Q			
	* 2.6738	* 2.5846	* 2.7744	* 3.0273	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.4678	* 0.5024	* 0.6000	* 0.5328	* 0.6399	* 0.5472	* 0.5987	* 0.3089 *
	* 4.2698	* 3.9774	* 3.3294	* 3.7688	* 3.1416	* 3.6872	* 3.3714	* 5.9593 *
9	* 0.5024	* 0.5856	* 0.5154	* 0.6286	* 0.5614	* 0.5833	* 0.6058	* 0.3180 *
	* 3.9774	* 3.4126	* 3.8895	* 3.2023	* 3.5930	* 3.4658	* 3.3334	* 5.8248 *
10	* 0.6000	* 0.5141	* 0.5338	* 0.5920	* 0.6575	* 0.5803	* 0.5975	* 0.2989 *
	* 3.3294	* 3.8993	* 3.7784	* 3.4083	* 3.0729	* 3.4877	* 3.3830	* 6.1536 *
11	* 0.5328	* 0.6266	* 0.5898	* 0.6528	* 0.5882	* 0.6514	* 0.5612	* 0.2672 *
	* 3.7688	* 3.2126	* 3.4206	* 3.0977	* 3.4428	* 3.1057	* 3.6005	* 6.8955 *
12	* 0.6399	* 0.5603	* 0.6562	* 0.5875	* 0.5268	* 0.5741	* 0.3889 *	
	* 3.1416	* 3.5997	* 3.0788	* 3.4468	* 3.8513	* 3.5245	* 4.7360 *	
13	* 0.5472	* 0.5826	* 0.5791	* 0.6503	* 0.5734	* 0.4049	* 0.2042 *	
	* 3.6872	* 3.4697	* 3.4946	* 3.1105	* 3.5287	* 4.9983	* 9.1467 *	
14	* 0.5987	* 0.6053	* 0.5965	* 0.5602	* 0.3879	* 0.2008 *		
	* 3.3714	* 3.3363	* 3.3885	* 3.6071	* 4.7475	* 9.2227 *		
15	* 0.3089	* 0.3178	* 0.2984	* 0.2666	* F-SUB-Q			
	* 5.9593	* 5.8278	* 6.1623	* 6.9087	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 86 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 75 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.3187	* 0.4027	* 0.5031	* 0.4602	* 0.5347	* 0.4553	* 0.4824	* 0.2669 *
	* 5.0637	* 4.9631	* 3.9396	* 4.2794	* 3.6806	* 4.3399	* 4.1496	* 6.7632 *
9	* 0.4027	* 0.4695	* 0.4379	* 0.5231	* 0.4703	* 0.4659	* 0.4831	* 0.2742 *
	* 4.9631	* 4.2888	* 4.5473	* 3.7802	* 4.1882	* 4.2648	* 4.1408	* 6.6273 *
10	* 0.5031	* 0.4372	* 0.4409	* 0.4795	* 0.5196	* 0.4575	* 0.4623	* 0.2509 *
	* 3.9396	* 4.5546	* 4.5954	* 4.1469	* 3.8011	* 4.2999	* 4.2407	* 7.0625 *
11	* 0.4602	* 0.5222	* 0.4783	* 0.4966	* 0.4401	* 0.4651	* 0.4191	* 0.2191 *
	* 4.2794	* 3.7845	* 4.1558	* 4.0426	* 4.4809	* 4.1725	* 4.6710	* 8.0496 *
12	* 0.5347	* 0.4698	* 0.5189	* 0.4397	* 0.3319	* 0.3622	* 0.2779	*
	* 3.6806	* 4.1906	* 3.8060	* 4.4835	* 4.9010	* 4.5887	* 6.0077	*
13	* 0.4553	* 0.4658	* 0.4571	* 0.4647	* 0.3618	* 0.2383	* 0.1439	*
	* 4.3399	* 4.2669	* 4.3035	* 4.1753	* 4.5918	* 6.1947	* 10.6785	*
14	* 0.4824	* 0.4830	* 0.4620	* 0.4188	* 0.2775	* 0.1399	*	*
	* 4.1496	* 4.1426	* 4.2433	* 4.6749	* 6.0153	* 10.8688	*	*
15	* 0.2669	* 0.2742	* 0.2507	* 0.2189	* F-SUB-Q			
	* 6.7632	* 6.6285	* 7.0667	* 8.0568	* M-SUB-Q			

AT 75% POWER, 75 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.6923	* 0.8737	* 1.1594	* 0.9941	* 1.2341	* 1.0283	* 1.2098	* 0.6177 *
	* 2.4358	* 2.3563	* 1.7632	* 2.0459	* 1.6467	* 1.9784	* 1.7015	* 3.0078 *
9	* 0.8737	* 1.1128	* 0.9449	* 1.1951	* 1.0169	* 1.1166	* 1.2149	* 0.6345 *
	* 2.3563	* 1.8540	* 2.1677	* 1.7101	* 1.9988	* 1.8249	* 1.6800	* 2.9289 *
10	* 1.1594	* 0.9432	* 1.0291	* 1.0671	* 1.1805	* 1.0749	* 1.1706	* 0.5786 *
	* 1.7632	* 2.1714	* 2.0186	* 1.9174	* 1.7280	* 1.8897	* 1.7273	* 3.1512 *
11	* 0.9941	* 1.1928	* 1.0646	* 1.1299	* 1.0009	* 1.1110	* 1.0561	* 0.5170 *
	* 2.0459	* 1.7132	* 1.9217	* 1.8055	* 1.9767	* 1.7875	* 1.9102	* 3.5219 *
12	* 1.2341	* 1.0164	* 1.1791	* 1.0001	* 0.7616	* 0.9110	* 0.6403	*
	* 1.6467	* 1.9997	* 1.7300	* 1.9778	* 2.0843	* 1.8600	* 2.6742	*
13	* 1.0283	* 1.1162	* 1.0741	* 1.1102	* 0.9101	* 0.5288	* 0.3334	*
	* 1.9784	* 1.8256	* 1.8911	* 1.7886	* 1.8612	* 2.8519	* 4.7282	*
14	* 1.2098	* 1.2146	* 1.1700	* 1.0552	* 0.6393	* 0.3239	*	*
	* 1.7015	* 1.6805	* 1.7282	* 1.9118	* 2.6777	* 4.8182	*	*
15	* 0.6177	* 0.6345	* 0.5783	* 0.5166	* F-SUB-Q			
	* 3.0078	* 2.9297	* 3.1530	* 3.5248	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 87 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 75 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.8427 *	* 1.0227 *	* 1.1945 *	* 1.1687 *	* 1.3265 *	* 1.2460 *	* 1.3406 *	* 0.7294 *
	* 2.0655 *	* 2.0457 *	* 1.7551 *	* 1.7857 *	* 1.5693 *	* 1.6695 *	* 1.5496 *	* 2.5689 *
9	* 1.0227 *	* 1.2522 *	* 1.1214 *	* 1.3210 *	* 1.2092 *	* 1.3555 *	* 1.3550 *	* 0.7519 *
	* 2.0457 *	* 1.6856 *	* 1.8742 *	* 1.5853 *	* 1.7222 *	* 1.5334 *	* 1.5322 *	* 2.5068 *
10	* 1.1945 *	* 1.1168 *	* 1.2477 *	* 1.2558 *	* 1.3271 *	* 1.3060 *	* 1.3291 *	* 0.6953 *
	* 1.7551 *	* 1.8818 *	* 1.6890 *	* 1.6691 *	* 1.5727 *	* 1.5944 *	* 1.5609 *	* 2.6824 *
11	* 1.1687 *	* 1.3187 *	* 1.2526 *	* 1.2732 *	* 1.1851 *	* 1.2407 *	* 1.2548 *	* 0.6286 *
	* 1.7857 *	* 1.5863 *	* 1.6735 *	* 1.6552 *	* 1.7005 *	* 1.6393 *	* 1.6544 *	* 2.9754 *
12	* 1.3265 *	* 1.2088 *	* 1.3260 *	* 1.1841 *	* 0.9306 *	* 1.0560 *	* 0.7605 *	
	* 1.5693 *	* 1.7228 *	* 1.5739 *	* 1.7015 *	* 1.7154 *	* 1.6698 *	* 2.3111 *	
13	* 1.2460 *	* 1.3550 *	* 1.3053 *	* 1.2398 *	* 1.0550 *	* 0.6438 *	* 0.4028 *	
	* 1.6695 *	* 1.5340 *	* 1.5952 *	* 1.6404 *	* 1.6707 *	* 2.4100 *	* 4.0293 *	
14	* 1.3406 *	* 1.3545 *	* 1.3284 *	* 1.2538 *	* 0.7592 *	* 0.3942 *		
	* 1.5496 *	* 1.5327 *	* 1.5617 *	* 1.6557 *	* 2.3144 *	* 4.0760 *		
15	* 0.7294 *	* 0.7518 *	* 0.6949 *	* 0.6280 *	F-SUB-Q			
	* 2.5689 *	* 2.5072 *	* 2.6840 *	* 2.9778 *	M-SUB-Q			

AT 75% POWER, 75 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9298 *	* 1.1162 *	* 1.3193 *	* 1.2714 *	* 1.4864 *	* 1.3792 *	* 1.5178 *	* 0.7823 *
	* 1.9322 *	* 1.9304 *	* 1.6415 *	* 1.6931 *	* 1.4415 *	* 1.5494 *	* 1.4036 *	* 2.4547 *
9	* 1.1162 *	* 1.4025 *	* 1.2286 *	* 1.4717 *	* 1.3282 *	* 1.5214 *	* 1.5368 *	* 0.8085 *
	* 1.9304 *	* 1.5548 *	* 1.7651 *	* 1.4692 *	* 1.6151 *	* 1.4036 *	* 1.3875 *	* 2.3915 *
10	* 1.3193 *	* 1.2227 *	* 1.3816 *	* 1.3814 *	* 1.4943 *	* 1.4614 *	* 1.5133 *	* 0.7485 *
	* 1.6415 *	* 1.7732 *	* 1.5725 *	* 1.5669 *	* 1.4411 *	* 1.4653 *	* 1.4124 *	* 2.5658 *
11	* 1.2714 *	* 1.4689 *	* 1.3778 *	* 1.4265 *	* 1.3154 *	* 1.4171 *	* 1.4325 *	* 0.6827 *
	* 1.6931 *	* 1.4721 *	* 1.5712 *	* 1.5259 *	* 1.5759 *	* 1.4834 *	* 1.4966 *	* 2.8292 *
12	* 1.4864 *	* 1.3277 *	* 1.4931 *	* 1.3142 *	* 1.0338 *	* 1.2068 *	* 0.8261 *	
	* 1.4415 *	* 1.6157 *	* 1.4423 *	* 1.5764 *	* 1.5832 *	* 1.5182 *	* 2.2098 *	
13	* 1.3792 *	* 1.5208 *	* 1.4607 *	* 1.4159 *	* 1.2056 *	* 0.7192 *	* 0.4373 *	
	* 1.5494 *	* 1.4041 *	* 1.4661 *	* 1.4846 *	* 1.5191 *	* 2.2567 *	* 3.8763 *	
14	* 1.5178 *	* 1.5363 *	* 1.5125 *	* 1.4313 *	* 0.8254 *	* 0.4279 *		
	* 1.4036 *	* 1.3881 *	* 1.4132 *	* 1.4979 *	* 2.2112 *	* 3.9213 *		
15	* 0.7823 *	* 0.8083 *	* 0.7480 *	* 0.6821 *	F-SUB-Q			
	* 2.4547 *	* 2.3919 *	* 2.5675 *	* 2.8316 *	M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 88 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 75 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9892	* 1.1750	* 1.3964	* 1.3279	* 1.5781	* 1.4503	* 1.6185	* 0.8204
	* 1.9247	* 1.9196	* 1.6150	* 1.6805	* 1.4053	* 1.5244	* 1.3629	* 2.4244
9	* 1.1750	* 1.4870	* 1.2836	* 1.5608	* 1.3892	* 1.6115	* 1.6421	* 0.8514
	* 1.9196	* 1.5329	* 1.7603	* 1.4388	* 1.5986	* 1.3723	* 1.3454	* 2.3530
10	* 1.3964	* 1.2773	* 1.4485	* 1.4560	* 1.5892	* 1.5499	* 1.6224	* 0.7889
	* 1.6150	* 1.7689	* 1.5636	* 1.5463	* 1.4046	* 1.4307	* 1.3640	* 2.5223
11	* 1.3279	* 1.5575	* 1.4519	* 1.5145	* 1.4021	* 1.5298	* 1.5491	* 0.7245
	* 1.6805	* 1.4418	* 1.5507	* 1.4915	* 1.5495	* 1.4334	* 1.4384	* 2.7630
12	* 1.5781	* 1.3887	* 1.5878	* 1.4007	* 1.1128	* 1.3213	* 0.8886	*
	* 1.4053	* 1.5992	* 1.4059	* 1.5499	* 1.5572	* 1.4709	* 2.1642	*
13	* 1.4503	* 1.6109	* 1.5491	* 1.5286	* 1.3199	* 0.7868	* 0.4703	*
	* 1.5244	* 1.3729	* 1.4315	* 1.4346	* 1.4719	* 2.2092	* 3.8370	*
14	* 1.6185	* 1.6415	* 1.6215	* 1.5478	* 0.8880	* 0.4601	*	*
	* 1.3629	* 1.3460	* 1.3648	* 1.4397	* 2.1655	* 3.8829	*	*
15	* 0.8204	* 0.8513	* 0.7884	* 0.7238	* F-SUB-Q			
	* 2.4244	* 2.3534	* 2.5242	* 2.7655	* M-SUB-Q			

AT 75% POWER, 75 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0647	* 1.2278	* 1.4494	* 1.3670	* 1.6359	* 1.4999	* 1.6835	* 0.8499
	* 1.9533	* 1.9427	* 1.6269	* 1.7013	* 1.4085	* 1.5263	* 1.3566	* 2.4234
9	* 1.2278	* 1.5477	* 1.3229	* 1.6222	* 1.4298	* 1.6719	* 1.7121	* 0.8837
	* 1.9427	* 1.5472	* 1.7843	* 1.4467	* 1.6163	* 1.3709	* 1.3377	* 2.3478
10	* 1.4494	* 1.3161	* 1.4963	* 1.5118	* 1.6543	* 1.6137	* 1.6983	* 0.8222
	* 1.6269	* 1.7934	* 1.5828	* 1.5592	* 1.4100	* 1.4344	* 1.3587	* 2.5167
11	* 1.3670	* 1.6184	* 1.5074	* 1.5843	* 1.4813	* 1.6261	* 1.6397	* 0.7593
	* 1.7013	* 1.4498	* 1.5638	* 1.4954	* 1.5597	* 1.4256	* 1.4320	* 2.7648
12	* 1.6359	* 1.4292	* 1.6527	* 1.4798	* 1.2127	* 1.4364	* 0.9526	*
	* 1.4085	* 1.6170	* 1.4114	* 1.5602	* 1.5689	* 1.4692	* 2.1559	*
13	* 1.4999	* 1.6711	* 1.6126	* 1.6246	* 1.4349	* 0.8744	* 0.5082	*
	* 1.5263	* 1.3716	* 1.4354	* 1.4269	* 1.4702	* 2.2180	* 3.8614	*
14	* 1.6835	* 1.7113	* 1.6972	* 1.6381	* 0.9518	* 0.4969	*	*
	* 1.3566	* 1.3383	* 1.3596	* 1.4334	* 2.1573	* 3.9098	*	*
15	* 0.8499	* 0.8836	* 0.8215	* 0.7585	* F-SUB-Q			
	* 2.4234	* 2.3483	* 2.5186	* 2.7674	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 89 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 75 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1858	* 1.2916	* 1.5072	* 1.4070	* 1.6963	* 1.5499	* 1.7525	* 0.8696 *
	* 1.9834	* 1.9640	* 1.6545	* 1.7403	* 1.4262	* 1.5473	* 1.3639	* 2.4766 *
9	* 1.2916	* 1.6180	* 1.3648	* 1.6894	* 1.4736	* 1.7340	* 1.7870	* 0.9054 *
	* 1.9640	* 1.5749	* 1.8287	* 1.4678	* 1.6518	* 1.3857	* 1.3454	* 2.3980 *
10	* 1.5072	* 1.3576	* 1.5488	* 1.5717	* 1.7253	* 1.6803	* 1.7790	* 0.8443 *
	* 1.6545	* 1.8385	* 1.6194	* 1.5885	* 1.4281	* 1.4535	* 1.3673	* 2.5775 *
11	* 1.4070	* 1.6853	* 1.5668	* 1.6767	* 1.5747	* 1.7405	* 1.7377	* 0.7849 *
	* 1.7403	* 1.4711	* 1.5934	* 1.5012	* 1.5677	* 1.4182	* 1.4394	* 2.8332 *
12	* 1.6963	* 1.4723	* 1.7235	* 1.5732	* 1.3572	* 1.5918	* 1.0089	*
	* 1.4262	* 1.6525	* 1.4296	* 1.5690	* 1.5853	* 1.4728	* 2.1857	*
13	* 1.5499	* 1.7331	* 1.6790	* 1.7388	* 1.5903	* 0.9944	* 0.5448	*
	* 1.5473	* 1.3865	* 1.4547	* 1.4195	* 1.4739	* 2.2505	* 3.9488	*
14	* 1.7525	* 1.7860	* 1.7777	* 1.7359	* 1.0081	* 0.5319	*	*
	* 1.3639	* 1.3461	* 1.3684	* 1.4408	* 2.1870	* 4.0042	*	*
15	* 0.8696	* 0.9052	* 0.8435	* 0.7840	* F-SUB-Q			
	* 2.4766	* 2.3985	* 2.5796	* 2.8361	* M-SUB-Q			

AT 75% POWER, 75 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2962	* 1.3427	* 1.5474	* 1.4351	* 1.7373	* 1.5860	* 1.8006	* 0.8857 *
	* 2.0431	* 2.0238	* 1.7196	* 1.8136	* 1.4764	* 1.6005	* 1.4039	* 2.5695 *
9	* 1.3427	* 1.6709	* 1.3954	* 1.7376	* 1.5073	* 1.7791	* 1.8408	* 0.9231 *
	* 2.0238	* 1.6379	* 1.9090	* 1.5217	* 1.7195	* 1.4305	* 1.3848	* 2.4865 *
10	* 1.5474	* 1.3891	* 1.5879	* 1.6170	* 1.8015	* 1.7307	* 1.8407	* 0.8647 *
	* 1.7196	* 1.9195	* 1.6885	* 1.6500	* 1.4780	* 1.5028	* 1.4076	* 2.6745 *
11	* 1.4351	* 1.7332	* 1.6119	* 1.7489	* 1.6528	* 1.8328	* 1.8165	* 0.8074 *
	* 1.8136	* 1.5253	* 1.6554	* 1.5266	* 1.5999	* 1.4391	* 1.4602	* 2.9412 *
12	* 1.7373	* 1.5059	* 1.7996	* 1.6513	* 1.5836	* 1.7192	* 1.0607	*
	* 1.4764	* 1.7203	* 1.4796	* 1.6012	* 1.6154	* 1.4921	* 2.2286	*
13	* 1.5860	* 1.7781	* 1.7292	* 1.8310	* 1.7178	* 1.0943	* 0.5787	*
	* 1.6005	* 1.4313	* 1.5042	* 1.4405	* 1.4932	* 2.2988	* 4.0373	*
14	* 1.8006	* 1.8396	* 1.8392	* 1.8145	* 1.0600	* 0.5644	*	*
	* 1.4039	* 1.3855	* 1.4087	* 1.4617	* 2.2299	* 4.0986	*	*
15	* 0.8857	* 0.9229	* 0.8638	* 0.8065	* F-SUB-Q			
	* 2.5695	* 2.4871	* 2.6769	* 2.9445	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 90 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 75 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3502	* 1.3794	* 1.5833	* 1.4589	* 1.7756	* 1.6176	* 1.8454	* 0.8967 *
	* 2.1370	* 2.0980	* 1.8032	* 1.9087	* 1.5429	* 1.6732	* 1.4601	* 2.7024 *
9	* 1.3794	* 1.7163	* 1.4214	* 1.7814	* 1.5365	* 1.8198	* 1.8904	* 0.9334 *
	* 2.0980	* 1.6820	* 2.0117	* 1.5919	* 1.8075	* 1.4922	* 1.4401	* 2.6191 *
10	* 1.5833	* 1.4174	* 1.6221	* 1.6562	* 1.8668	* 1.7749	* 1.8975	* 0.8793 *
	* 1.8032	* 2.0231	* 1.7709	* 1.7293	* 1.5198	* 1.5701	* 1.4639	* 2.8145 *
11	* 1.4589	* 1.7767	* 1.6508	* 1.8097	* 1.7130	* 1.9095	* 1.8846	* 0.8223 *
	* 1.9087	* 1.5958	* 1.7349	* 1.5748	* 1.6551	* 1.4785	* 1.4908	* 3.1001 *
12	* 1.7756	* 1.5350	* 1.8647	* 1.7115	* 1.6679	* 1.8124	* 1.0967	*
	* 1.5429	* 1.8083	* 1.5214	* 1.6565	* 1.6750	* 1.5361	* 2.3155	*
13	* 1.6176	* 1.8187	* 1.7731	* 1.9075	* 1.8109	* 1.1537	* 0.6023	*
	* 1.6732	* 1.4931	* 1.5718	* 1.4800	* 1.5373	* 2.3863	* 4.2011	*
14	* 1.8454	* 1.8890	* 1.8957	* 1.8825	* 1.0959	* 0.5867	*	*
	* 1.4601	* 1.4410	* 1.4653	* 1.4925	* 2.3169	* 4.2700	*	*
15	* 0.8967	* 0.9332	* 0.8783	* 0.8212	* F-SUB-Q			
	* 2.7024	* 2.6198	* 2.8171	* 3.1038	* M-SUB-Q			

AT 75% POWER, 75 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3584	* 1.3824	* 1.5772	* 1.4563	* 1.7701	* 1.6195	* 1.8428	* 0.9081 *
	* 2.2597	* 2.2182	* 1.9370	* 2.0553	* 1.6631	* 1.7939	* 1.5687	* 2.8621 *
9	* 1.3824	* 1.7127	* 1.4203	* 1.7794	* 1.5370	* 1.8230	* 1.8920	* 0.9480 *
	* 2.2182	* 1.7861	* 2.1519	* 1.7071	* 1.9466	* 1.5996	* 1.5456	* 2.7643 *
10	* 1.5772	* 1.4173	* 1.6227	* 1.6601	* 1.8783	* 1.7823	* 1.9038	* 0.8934 *
	* 1.9370	* 2.1597	* 1.8764	* 1.8289	* 1.6004	* 1.6814	* 1.5694	* 2.9658 *
11	* 1.4563	* 1.7747	* 1.6546	* 1.8179	* 1.7281	* 1.9265	* 1.9007	* 0.8399 *
	* 2.0553	* 1.7116	* 1.8349	* 1.6636	* 1.7394	* 1.5534	* 1.5670	* 3.2157 *
12	* 1.7701	* 1.5355	* 1.8761	* 1.7265	* 1.6928	* 1.8386	* 1.1310	*
	* 1.6631	* 1.9475	* 1.6022	* 1.7409	* 1.7730	* 1.6239	* 2.3913	*
13	* 1.6195	* 1.8217	* 1.7802	* 1.9244	* 1.8371	* 1.1872	* 0.6225	*
	* 1.7939	* 1.6007	* 1.6833	* 1.5551	* 1.6254	* 2.5083	* 4.3751	*
14	* 1.8428	* 1.8905	* 1.9018	* 1.8984	* 1.1300	* 0.6066	*	*
	* 1.5687	* 1.5466	* 1.5710	* 1.5689	* 2.3932	* 4.4455	*	*
15	* 0.9081	* 0.9477	* 0.8924	* 0.8388	* F-SUB-Q			
	* 2.8621	* 2.7651	* 2.9686	* 3.2197	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 91 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 75 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3779	* 1.4000	* 1.6067	* 1.4731	* 1.8061	* 1.6461	* 1.8879	* 0.9068 *
	* 2.3711	* 2.3314	* 2.0225	* 2.1915	* 1.7566	* 1.9008	* 1.6488	* 3.0786 *
9	* 1.4000	* 1.7473	* 1.4374	* 1.8171	* 1.5575	* 1.8593	* 1.9399	* 0.9464 *
	* 2.3314	* 1.8631	* 2.2638	* 1.7790	* 2.0685	* 1.6896	* 1.6248	* 2.9773 *
10	* 1.6067	* 1.4343	* 1.6467	* 1.6889	* 1.9286	* 1.8180	* 1.9556	* 0.8950 *
	* 2.0225	* 2.2716	* 1.9685	* 1.9141	* 1.6599	* 1.7539	* 1.6264	* 3.1998 *
11	* 1.4730	* 1.8121	* 1.6831	* 1.8628	* 1.7648	* 1.9840	* 1.9558	* 0.8407 *
	* 2.1915	* 1.7838	* 1.9207	* 1.7236	* 1.8141	* 1.6074	* 1.6224	* 3.4184 *
12	* 1.8061	* 1.5559	* 1.9262	* 1.7632	* 1.7327	* 1.8948	* 1.1360	*
	* 1.7566	* 2.0705	* 1.6618	* 1.8157	* 1.8441	* 1.6773	* 2.5348	*
13	* 1.6461	* 1.8578	* 1.8157	* 1.9817	* 1.8931	* 1.2044	* 0.6250	*
	* 1.9008	* 1.6908	* 1.7561	* 1.6092	* 1.6791	* 2.6307	* 4.6313	*
14	* 1.8879	* 1.9382	* 1.9533	* 1.9532	* 1.1351	* 0.6079	*	
	* 1.6488	* 1.6259	* 1.6281	* 1.6244	* 2.5365	* 4.7148	*	
15	* 0.9068	* 0.9461	* 0.8939	* 0.8395	* F-SUB-Q			
	* 3.0786	* 2.9782	* 3.2031	* 3.4228	* M-SUB-Q			

AT 75% POWER, 75 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3751	* 1.3964	* 1.6054	* 1.4698	* 1.8094	* 1.6499	* 1.8973	* 0.9062
	* 2.4495	* 2.4008	* 2.0812	* 2.2685	* 1.8419	* 2.0199	* 1.7566	* 3.3142
9	* 1.3964	* 1.7472	* 1.4340	* 1.8207	* 1.5564	* 1.8667	* 1.9514	* 0.9470
	* 2.4008	* 1.9177	* 2.3333	* 1.8390	* 2.1484	* 1.7888	* 1.7131	* 3.2011
10	* 1.6054	* 1.4308	* 1.6453	* 1.6913	* 1.9406	* 1.8256	* 1.9694	* 0.8963
	* 2.0812	* 2.3394	* 2.0373	* 1.9814	* 1.7326	* 1.8352	* 1.7018	* 3.3811
11	* 1.4698	* 1.8155	* 1.6853	* 1.8708	* 1.7721	* 2.0006	* 1.9732	* 0.8430
	* 2.2685	* 1.8442	* 1.9884	* 1.7971	* 1.9011	* 1.6831	* 1.7039	* 3.6138
12	* 1.8094	* 1.5547	* 1.9381	* 1.7704	* 1.7418	* 1.9118	* 1.1424	*
	* 1.8420	* 2.1507	* 1.7348	* 1.9029	* 1.9370	* 1.7650	* 2.6777	*
13	* 1.6499	* 1.8651	* 1.8230	* 1.9981	* 1.9100	* 1.2119	* 0.6278	*
	* 2.0199	* 1.7904	* 1.8378	* 1.6852	* 1.7667	* 2.7859	* 4.9189	*
14	* 1.8973	* 1.9496	* 1.9670	* 1.9704	* 1.1414	* 0.6100	*	
	* 1.7566	* 1.7147	* 1.7039	* 1.7063	* 2.6798	* 5.0117	*	
15	* 0.9062	* 0.9466	* 0.8951	* 0.8417	* F-SUB-Q			
	* 3.3142	* 3.2021	* 3.3857	* 3.6192	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 92 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 75 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3537	* 1.3746	* 1.5768	* 1.4489	* 1.7832	* 1.6331	* 1.8752	* 0.9057
	* 2.4476	* 2.3985	* 2.0838	* 2.2605	* 1.8349	* 2.0018	* 1.7440	* 3.2677
9	* 1.3746	* 1.7169	* 1.4124	* 1.7940	* 1.5362	* 1.8486	* 1.9305	* 0.9473
	* 2.3985	* 1.9193	* 2.3289	* 1.8361	* 2.1405	* 1.7746	* 1.7030	* 3.1458
10	* 1.5768	* 1.4093	* 1.6219	* 1.6706	* 1.9197	* 1.8085	* 1.9497	* 0.8963
	* 2.0838	* 2.3355	* 2.0338	* 1.9740	* 1.7259	* 1.8232	* 1.6921	* 3.3252
11	* 1.4489	* 1.7887	* 1.6645	* 1.8495	* 1.7543	* 1.9813	* 1.9572	* 0.8444
	* 2.2605	* 1.8415	* 1.9812	* 1.7934	* 1.8930	* 1.6754	* 1.6929	* 3.5505
12	* 1.7832	* 1.5345	* 1.9172	* 1.7526	* 1.7259	* 1.8955	* 1.1496	*
	* 1.8349	* 2.1429	* 1.7282	* 1.8949	* 1.9374	* 1.7597	* 2.6241	*
13	* 1.6331	* 1.8469	* 1.8058	* 1.9787	* 1.8936	* 1.2116	* 0.6305	*
	* 2.0018	* 1.7762	* 1.8260	* 1.6776	* 1.7618	* 2.7580	* 4.8586	*
14	* 1.8752	* 1.9286	* 1.9472	* 1.9543	* 1.1484	* 0.6128	*	
	* 1.7440	* 1.7047	* 1.6943	* 1.6954	* 2.6266	* 4.9492	*	
15	* 0.9057	* 0.9469	* 0.8950	* 0.8430	* F-SUB-Q			
	* 3.2677	* 3.1471	* 3.3299	* 3.5561	* M-SUB-Q			

AT 75% POWER, 75 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3485	* 1.3685	* 1.5799	* 1.4436	* 1.7927	* 1.6376	* 1.8943	* 0.8920
	* 2.3516	* 2.2983	* 1.9862	* 2.1764	* 1.7638	* 1.9291	* 1.6681	* 3.1766
9	* 1.3685	* 1.7226	* 1.4070	* 1.8030	* 1.5331	* 1.8593	* 1.9513	* 0.9329
	* 2.2983	* 1.8296	* 2.2367	* 1.7607	* 2.0701	* 1.7130	* 1.6351	* 3.0639
10	* 1.5799	* 1.4037	* 1.6195	* 1.6727	* 1.9370	* 1.8172	* 1.9727	* 0.8852
	* 1.9862	* 2.2404	* 1.9606	* 1.9033	* 1.6655	* 1.7656	* 1.6281	* 3.2313
11	* 1.4436	* 1.7976	* 1.6664	* 1.8641	* 1.7592	* 2.0034	* 1.9799	* 0.8319
	* 2.1764	* 1.7657	* 1.9102	* 1.7275	* 1.8407	* 1.6197	* 1.6325	* 3.4617
12	* 1.7927	* 1.5313	* 1.9343	* 1.7575	* 1.7320	* 1.9152	* 1.1337	*
	* 1.7638	* 2.0724	* 1.6678	* 1.8420	* 1.8894	* 1.7003	* 2.5798	*
13	* 1.6376	* 1.8575	* 1.8141	* 2.0007	* 1.9131	* 1.2035	* 0.6200	*
	* 1.9291	* 1.7146	* 1.7683	* 1.6218	* 1.7023	* 2.6934	* 4.7441	*
14	* 1.8943	* 1.9492	* 1.9699	* 1.9769	* 1.1326	* 0.6014	*	
	* 1.6681	* 1.6368	* 1.6302	* 1.6349	* 2.5817	* 4.8416	*	
15	* 0.8920	* 0.9325	* 0.8838	* 0.8304	* F-SUB-Q			
	* 3.1766	* 3.0652	* 3.2360	* 3.4672	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 93 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 75 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3291	* 1.3488	* 1.5609	* 1.4246	* 1.7774	* 1.6251	* 1.8861	* 0.8794 *
	* 2.1977	* 2.1507	* 1.8514	* 2.0179	* 1.6247	* 1.7803	* 1.5351	* 2.9434 *
9	* 1.3488	* 1.7036	* 1.3875	* 1.7869	* 1.5147	* 1.8479	* 1.9439	* 0.9195 *
	* 2.1507	* 1.7075	* 2.0898	* 1.6394	* 1.9272	* 1.5783	* 1.5052	* 2.8378 *
10	* 1.5609	* 1.3841	* 1.5994	* 1.6558	* 1.9266	* 1.8049	* 1.9668	* 0.8737 *
	* 1.8514	* 2.0978	* 1.8334	* 1.7757	* 1.5448	* 1.6409	* 1.5088	* 3.0054 *
11	* 1.4246	* 1.7813	* 1.6493	* 1.8520	* 1.7440	* 1.9959	* 1.9749	* 0.8196 *
	* 2.0179	* 1.6442	* 1.7824	* 1.6059	* 1.7114	* 1.4975	* 1.5088	* 3.2469 *
12	* 1.7774	* 1.5128	* 1.9238	* 1.7422	* 1.7180	* 1.9083	* 1.1203	*
	* 1.6247	* 1.9295	* 1.5469	* 1.7131	* 1.7553	* 1.5723	* 2.4036	*
13	* 1.6251	* 1.8459	* 1.8016	* 1.9931	* 1.9059	* 1.1910	* 0.6108	*
	* 1.7803	* 1.5798	* 1.6437	* 1.4995	* 1.5742	* 2.5089	* 4.4379	*
14	* 1.8861	* 1.9416	* 1.9638	* 1.9717	* 1.1193	* 0.5919	*	*
	* 1.5351	* 1.5068	* 1.5109	* 1.5111	* 2.4055	* 4.5337	*	*
15	* 0.8794	* 0.9191	* 0.8723	* 0.8181	* F-SUB-Q			
	* 2.9434	* 2.8391	* 3.0100	* 3.2524	* M-SUB-Q			

AT 75% POWER, 75 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3021	* 1.3208	* 1.5297	* 1.3963	* 1.7477	* 1.6003	* 1.8600	* 0.8659 *
	* 2.0666	* 2.0127	* 1.7233	* 1.8853	* 1.5151	* 1.6594	* 1.4291	* 2.7488 *
9	* 1.3208	* 1.6710	* 1.3597	* 1.7560	* 1.4867	* 1.8220	* 1.9178	* 0.9070 *
	* 2.0127	* 1.5898	* 1.9451	* 1.5224	* 1.7946	* 1.4676	* 1.3972	* 2.6440 *
10	* 1.5297	* 1.3562	* 1.5692	* 1.6272	* 1.8987	* 1.7786	* 1.9412	* 0.8612 *
	* 1.7233	* 1.9508	* 1.7057	* 1.6496	* 1.4429	* 1.5197	* 1.3948	* 2.7905 *
11	* 1.3963	* 1.7504	* 1.6207	* 1.8241	* 1.7158	* 1.9689	* 1.9501	* 0.8097 *
	* 1.8853	* 1.5270	* 1.6559	* 1.5028	* 1.6074	* 1.4018	* 1.4047	* 3.0000 *
12	* 1.7477	* 1.4849	* 1.8958	* 1.7139	* 1.6912	* 1.8830	* 1.1068	*
	* 1.5151	* 1.7966	* 1.4450	* 1.6090	* 1.6521	* 1.4754	* 2.2499	*
13	* 1.6003	* 1.8200	* 1.7752	* 1.9660	* 1.8805	* 1.1746	* 0.6020	*
	* 1.6594	* 1.4692	* 1.5224	* 1.4038	* 1.4772	* 2.3584	* 4.1777	*
14	* 1.8600	* 1.9155	* 1.9381	* 1.9468	* 1.1057	* 0.5832	*	*
	* 1.4291	* 1.3988	* 1.3969	* 1.4070	* 2.2519	* 4.2692	*	*
15	* 0.8659	* 0.9066	* 0.8597	* 0.8082	* F-SUB-Q			
	* 2.7488	* 2.6453	* 2.7949	* 3.0053	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 94 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 75 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2650	* 1.2829	* 1.4820	* 1.3585	* 1.6986	* 1.5618	* 1.8121	* 0.8533
	* 2.0908	* 2.0463	* 1.7694	* 1.9328	* 1.5558	* 1.6979	* 1.4654	* 2.7922
9	* 1.2829	* 1.6201	* 1.3217	* 1.7057	* 1.4471	* 1.7785	* 1.8690	* 0.8945
	* 2.0463	* 1.6250	* 1.9887	* 1.5590	* 1.8361	* 1.4998	* 1.4289	* 2.6811
10	* 1.4820	* 1.3182	* 1.5259	* 1.5842	* 1.8487	* 1.7356	* 1.8921	* 0.8479
	* 1.7694	* 1.9926	* 1.7421	* 1.6828	* 1.4646	* 1.5484	* 1.4216	* 2.8247
11	* 1.3585	* 1.7002	* 1.5778	* 1.7751	* 1.6721	* 1.9183	* 1.9028	* 0.7982
	* 1.9328	* 1.5638	* 1.6893	* 1.5276	* 1.6256	* 1.4171	* 1.4223	* 3.0234
12	* 1.6986	* 1.4452	* 1.8458	* 1.6703	* 1.6489	* 1.8357	* 1.0944	*
	* 1.5558	* 1.8383	* 1.4668	* 1.6273	* 1.6702	* 1.4910	* 2.2417	*
13	* 1.5618	* 1.7765	* 1.7322	* 1.9154	* 1.8333	* 1.1540	* 0.5938	*
	* 1.6979	* 1.5015	* 1.5514	* 1.4192	* 1.4930	* 2.3695	* 4.1779	*
14	* 1.8121	* 1.8666	* 1.8889	* 1.8994	* 1.0932	* 0.5755	*	*
	* 1.4654	* 1.4306	* 1.4238	* 1.4246	* 2.2440	* 4.2674	*	*
15	* 0.8533	* 0.8940	* 0.8465	* 0.7967	* F-SUB-Q			
	* 2.7922	* 2.6824	* 2.8293	* 3.0289	* M-SUB-Q			

AT 75% POWER, 75 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2446	* 1.2611	* 1.4657	* 1.3349	* 1.6844	* 1.5432	* 1.8036	* 0.8256
	* 1.9587	* 1.9301	* 1.6646	* 1.8324	* 1.4623	* 1.6022	* 1.3723	* 2.6930
9	* 1.2611	* 1.6054	* 1.2996	* 1.6912	* 1.4242	* 1.7624	* 1.8605	* 0.8649
	* 1.9301	* 1.5226	* 1.8786	* 1.4627	* 1.7364	* 1.4100	* 1.3362	* 2.5890
10	* 1.4657	* 1.2963	* 1.5040	* 1.5642	* 1.8368	* 1.7175	* 1.8844	* 0.8223
	* 1.6646	* 1.8831	* 1.6423	* 1.5839	* 1.3657	* 1.4546	* 1.3263	* 2.7130
11	* 1.3349	* 1.6856	* 1.5577	* 1.7622	* 1.6506	* 1.9082	* 1.8929	* 0.7707
	* 1.8324	* 1.4674	* 1.5902	* 1.4267	* 1.5225	* 1.3167	* 1.3235	* 2.9108
12	* 1.6844	* 1.4223	* 1.8338	* 1.6488	* 1.6287	* 1.8243	* 1.0581	*
	* 1.4623	* 1.7385	* 1.3678	* 1.5241	* 1.5525	* 1.3815	* 2.1413	*
13	* 1.5432	* 1.7603	* 1.7138	* 1.9052	* 1.8218	* 1.1253	* 0.5725	*
	* 1.6022	* 1.4116	* 1.4575	* 1.3187	* 1.3833	* 2.2314	* 3.9926	*
14	* 1.8036	* 1.8581	* 1.8811	* 1.8895	* 1.0570	* 0.5538	*	*
	* 1.3723	* 1.3379	* 1.3284	* 1.3257	* 2.1432	* 4.0865	*	*
15	* 0.8256	* 0.8644	* 0.8208	* 0.7691	* F-SUB-Q			
	* 2.6930	* 2.5903	* 2.7176	* 2.9163	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 95 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 75 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2088	* 1.2237	* 1.4218	* 1.2953	* 1.6375	* 1.5017	* 1.7564	* 0.8000 *
	* 1.8872	* 1.8672	* 1.6137	* 1.7771	* 1.4152	* 1.5496	* 1.3262	* 2.6201 *
9	* 1.2237	* 1.5602	* 1.2620	* 1.6442	* 1.3832	* 1.7173	* 1.8123	* 0.8384 *
	* 1.8672	* 1.4714	* 1.8177	* 1.4140	* 1.6811	* 1.3607	* 1.2895	* 2.5174 *
10	* 1.4218	* 1.2588	* 1.4625	* 1.5212	* 1.7872	* 1.6721	* 1.8352	* 0.7970 *
	* 1.6137	* 1.8222	* 1.5865	* 1.5297	* 1.3156	* 1.4030	* 1.2784	* 2.6341 *
11	* 1.2953	* 1.6386	* 1.5147	* 1.7147	* 1.6043	* 1.8567	* 1.8422	* 0.7466 *
	* 1.7771	* 1.4186	* 1.5359	* 1.3749	* 1.4667	* 1.2665	* 1.2738	* 2.8243 *
12	* 1.6375	* 1.3814	* 1.7843	* 1.6026	* 1.5841	* 1.7742	* 1.0260	*
	* 1.4152	* 1.6832	* 1.3177	* 1.4683	* 1.4893	* 1.3267	* 2.0672	*
13	* 1.5017	* 1.7152	* 1.6685	* 1.8537	* 1.7717	* 1.0915	* 0.5541	*
	* 1.5496	* 1.3623	* 1.4058	* 1.2684	* 1.3285	* 2.1471	* 3.8597	*
14	* 1.7564	* 1.8098	* 1.8319	* 1.8388	* 1.0249	* 0.5357	*	
	* 1.3262	* 1.2911	* 1.2805	* 1.2760	* 2.0690	* 3.9521	*	
15	* 0.8000	* 0.8379	* 0.7956	* 0.7450	* F-SUB-Q			
	* 2.6201	* 2.5188	* 2.6386	* 2.8298	* M-SUB-Q			

AT 75% POWER, 75 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1555	* 1.1684	* 1.3460	* 1.2373	* 1.5518	* 1.4333	* 1.6633	* 0.7754 *
	* 1.8729	* 1.8565	* 1.6193	* 1.7685	* 1.4185	* 1.5421	* 1.3309	* 2.5732 *
9	* 1.1684	* 1.4792	* 1.2067	* 1.5593	* 1.3218	* 1.6375	* 1.7165	* 0.8134 *
	* 1.8565	* 1.4732	* 1.8054	* 1.4155	* 1.6706	* 1.3546	* 1.2921	* 2.4688 *
10	* 1.3460	* 1.2037	* 1.3989	* 1.4517	* 1.6930	* 1.5950	* 1.7363	* 0.7707 *
	* 1.6193	* 1.8098	* 1.5742	* 1.5209	* 1.3162	* 1.3948	* 1.2807	* 2.5892 *
11	* 1.2373	* 1.5540	* 1.4456	* 1.6264	* 1.5295	* 1.7557	* 1.7421	* 0.7243 *
	* 1.7685	* 1.4201	* 1.5271	* 1.3724	* 1.4570	* 1.2677	* 1.2755	* 2.7650 *
12	* 1.5518	* 1.3201	* 1.6901	* 1.5278	* 1.5113	* 1.6779	* 0.9962	*
	* 1.4185	* 1.6726	* 1.3183	* 1.4586	* 1.4768	* 1.3268	* 2.0169	*
13	* 1.4333	* 1.6355	* 1.5916	* 1.7529	* 1.6758	* 1.0503	* 0.5380	*
	* 1.5421	* 1.3562	* 1.3977	* 1.2697	* 1.3287	* 2.1114	* 3.7687	*
14	* 1.6633	* 1.7140	* 1.7331	* 1.7389	* 0.9949	* 0.5210	*	
	* 1.3309	* 1.2938	* 1.2829	* 1.2778	* 2.0192	* 3.8529	*	
15	* 0.7755	* 0.8129	* 0.7693	* 0.7228	* F-SUB-Q			
	* 2.5732	* 2.4702	* 2.5937	* 2.7704	* M-SUB-Q			

CNEI-0400-355
Appendix A, Rev. 0
Page 96 of 312

F-SUB-O & M-SUB-O VALUES (F-SUB-O OP MARGIN) - NORMAL OPERATION

	H	G	F	E	D	C	B	A
8	* 1.1133	* 1.1250	* 1.2941	* 1.1908	* 1.4871	* 1.3765	* 1.5930	* 0.7319
	* 1.8640	* 1.8490	* 1.6154	* 1.7617	* 1.4192	* 1.5391	* 1.3318	* 2.6166
9	* 1.1250	* 1.4234	* 1.1638	* 1.4991	* 1.2721	* 1.5726	* 1.6431	* 0.7671
	* 1.8490	* 1.4679	* 1.7961	* 1.4110	* 1.6639	* 1.3513	* 1.2930	* 2.5137
10	* 1.2941	* 1.1603	* 1.3510	* 1.3989	* 1.6215	* 1.5322	* 1.6611	* 0.7277
	* 1.6154	* 1.8005	* 1.5620	* 1.5120	* 1.3154	* 1.3902	* 1.2817	* 2.6317
11	* 1.1908	* 1.4941	* 1.3930	* 1.5602	* 1.4704	* 1.6774	* 1.6608	* 0.6811
	* 1.7617	* 1.4156	* 1.5182	* 1.3689	* 1.4500	* 1.2691	* 1.2803	* 2.8213
12	* 1.4871	* 1.2705	* 1.6188	* 1.4691	* 1.4520	* 1.6016	* 0.9354	*
	* 1.4192	* 1.6659	* 1.3175	* 1.4513	* 1.4703	* 1.3303	* 2.0570	*
13	* 1.3765	* 1.5706	* 1.5289	* 1.6747	* 1.5997	* 0.9926	* 0.5064	*
	* 1.5391	* 1.3529	* 1.3931	* 1.2711	* 1.3318	* 2.1384	* 3.8390	*
14	* 1.5930	* 1.6408	* 1.6581	* 1.6577	* 0.9342	* 0.4897	*	*
	* 1.3318	* 1.2947	* 1.2838	* 1.2825	* 2.0593	* 3.9301	*	*
15	* 0.7319	* 0.7667	* 0.7264	* 0.6796	* F-SUB-Q			
	* 2.6166	* 2.5150	* 2.6362	* 2.8269	* M-SUB-Q			

	H	G	F	E	D	C	B	A
8	* 1.0247	* 1.0497	* 1.2052	* 1.1150	* 1.3630	* 1.2673	* 1.4484	* 0.6831
	* 1.9614	* 1.9182	* 1.6782	* 1.8205	* 1.4977	* 1.6169	* 1.4165	* 2.7171
9	* 1.0497	* 1.3079	* 1.0830	* 1.3834	* 1.1810	* 1.4386	* 1.4908	* 0.7143
	* 1.9182	* 1.5459	* 1.8724	* 1.4785	* 1.7335	* 1.4279	* 1.3775	* 2.6162
10	* 1.2052	* 1.0764	* 1.2478	* 1.3026	* 1.4801	* 1.4038	* 1.5051	* 0.6753
	* 1.6782	* 1.8786	* 1.6360	* 1.5697	* 1.3923	* 1.4662	* 1.3668	* 2.7476
11	* 1.1150	* 1.3790	* 1.2973	* 1.4284	* 1.3627	* 1.5235	* 1.5060	* 0.6277
	* 1.8205	* 1.4830	* 1.5759	* 1.4400	* 1.5111	* 1.3495	* 1.3642	* 2.9659
12	* 1.3630	* 1.1796	* 1.4777	* 1.3615	* 1.3307	* 1.4556	* 0.8688	
	* 1.4977	* 1.7355	* 1.3945	* 1.5124	* 1.5500	* 1.4139	* 2.1423	
13	* 1.2673	* 1.4369	* 1.4009	* 1.5211	* 1.4540	* 0.9108	* 0.4693	
	* 1.6169	* 1.4296	* 1.4691	* 1.3515	* 1.4154	* 2.2540	* 4.0143	
14	* 1.4484	* 1.4889	* 1.5025	* 1.5033	* 0.8675	* 0.4535	*	
	* 1.4165	* 1.3792	* 1.3691	* 1.3665	* 2.1452	* 4.1126	*	
15	* 0.6831	* 0.7139	* 0.6742	* 0.6265	* F-SUB-Q			
	* 2.7171	* 2.6175	* 2.7522	* 2.9715	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 97 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 75 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.8260	* 0.8795	* 1.1618	* 0.9384	* 1.2501	* 1.0268	* 1.2920	* 0.5825
	* 2.3764	* 2.2351	* 1.6973	* 2.1105	* 1.5913	* 1.9458	* 1.5473	* 3.1137
9	* 0.8795	* 1.1569	* 0.9030	* 1.2163	* 0.9889	* 1.1638	* 1.3187	* 0.6070
	* 2.2351	* 1.7046	* 2.1863	* 1.6350	* 2.0141	* 1.7189	* 1.5182	* 3.0083
10	* 1.1618	* 0.9006	* 1.0154	* 1.0924	* 1.2908	* 1.1320	* 1.3099	* 0.5637
	* 1.6973	* 2.1920	* 1.9604	* 1.8246	* 1.5522	* 1.7715	* 1.5293	* 3.2168
11	* 0.9384	* 1.2122	* 1.0883	* 1.2746	* 1.1331	* 1.3410	* 1.2562	* 0.5209
	* 2.1105	* 1.6403	* 1.8313	* 1.5725	* 1.7696	* 1.4939	* 1.5937	* 3.4934
12	* 1.2501	* 0.9873	* 1.2887	* 1.1322	* 1.0515	* 1.2602	* 0.7391	*
	* 1.5913	* 2.0172	* 1.5546	* 1.7710	* 1.9104	* 1.5902	* 2.4584	*
13	* 1.0268	* 1.1625	* 1.1299	* 1.3391	* 1.2588	* 0.7504	* 0.3923	*
	* 1.9458	* 1.7208	* 1.7748	* 1.4959	* 1.5920	* 2.6701	* 4.6954	*
14	* 1.2920	* 1.3170	* 1.3079	* 1.2540	* 0.7373	* 0.3796	*	
	* 1.5473	* 1.5200	* 1.5316	* 1.5964	* 2.4640	* 4.8053	*	
15	* 0.5825	* 0.6067	* 0.5627	* 0.5199	* F-SUB-Q			
	* 3.1137	* 3.0097	* 3.2219	* 3.4998	* M-SUB-Q			

AT 75% POWER, 75 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.3539	* 0.3835	* 0.4648	* 0.4114	* 0.4939	* 0.4210	* 0.4705	* 0.2456 *
	* 5.4393	* 5.0268	* 4.1528	* 4.7171	* 3.9381	* 4.6445	* 4.1578	* 7.2488 *
9	* 0.3835	* 0.4488	* 0.3965	* 0.4898	* 0.4335	* 0.4501	* 0.4771	* 0.2528 *
	* 5.0268	* 4.2968	* 4.8820	* 3.9719	* 4.4994	* 4.3486	* 4.1052	* 7.0868 *
10	* 0.4648	* 0.3955	* 0.4081	* 0.4566	* 0.5155	* 0.4511	* 0.4728	* 0.2385 *
	* 4.1528	* 4.8934	* 4.7745	* 4.2725	* 3.7976	* 4.3452	* 4.1450	* 7.4619 *
11	* 0.4114	* 0.4884	* 0.4552	* 0.5095	* 0.4565	* 0.5137	* 0.4490	* 0.2152 *
	* 4.7171	* 3.9837	* 4.2860	* 3.8408	* 4.2917	* 3.8151	* 4.3659	* 8.3014 *
12	* 0.4939	* 0.4327	* 0.5147	* 0.4561	* 0.4098	* 0.4572	* 0.3091	*
	* 3.9381	* 4.5069	* 3.8036	* 4.2961	* 4.7907	* 4.2909	* 5.7654	*
13	* 0.4210	* 0.4496	* 0.4503	* 0.5130	* 0.4567	* 0.3211	* 0.1659	*
	* 4.6445	* 4.3530	* 4.3527	* 3.8205	* 4.2956	* 6.1162	*10.9050	*
14	* 0.4705	* 0.4765	* 0.4721	* 0.4483	* 0.3083	* 0.1632	*	
	* 4.1578	* 4.1100	* 4.1510	* 4.3733	* 5.7787	*10.9796	*	
15	* 0.2456	* 0.2527	* 0.2382	* 0.2148	* F-SUB-Q			
	* 7.2488	* 7.0901	* 7.4715	* 8.3161	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 98 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 125 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.3024	* 0.3801	* 0.4774	* 0.4349	* 0.5037	* 0.4286	* 0.4569	* 0.2532
	* 5.3330	* 5.2623	* 4.1585	* 4.5358	* 3.9142	* 4.6166	* 4.3857	* 7.1179
9	* 0.3801	* 0.4459	* 0.4146	* 0.4962	* 0.4444	* 0.4400	* 0.4577	* 0.2603
	* 5.2623	* 4.5201	* 4.8092	* 3.9915	* 4.4432	* 4.5236	* 4.3743	* 6.9721
10	* 0.4774	* 0.4140	* 0.4176	* 0.4535	* 0.4926	* 0.4324	* 0.4392	* 0.2383
	* 4.1585	* 4.8166	* 4.8536	* 4.3898	* 4.0152	* 4.5542	* 4.4716	* 7.4241
11	* 0.4349	* 0.4953	* 0.4525	* 0.4712	* 0.4148	* 0.4417	* 0.3989	* 0.2089
	* 4.5358	* 3.9958	* 4.3989	* 4.2531	* 4.7169	* 4.3813	* 4.9144	* 8.4389
12	* 0.5037	* 0.4440	* 0.4920	* 0.4144	* 0.3141	* 0.3445	* 0.2631	*
	* 3.9142	* 4.4460	* 4.0201	* 4.7194	* 5.1381	* 4.8022	* 6.3107	*
13	* 0.4286	* 0.4398	* 0.4320	* 0.4414	* 0.3442	* 0.2266	* 0.1384	*
	* 4.6166	* 4.5257	* 4.5578	* 4.3842	* 4.8053	* 6.5022	* 11.0324	*
14	* 0.4569	* 0.4575	* 0.4389	* 0.3986	* 0.2628	* 0.1346	*	*
	* 4.3857	* 4.3762	* 4.4741	* 4.9182	* 6.3185	* 11.2297	*	*
15	* 0.2532	* 0.2602	* 0.2382	* 0.2087	* F-SUB-Q			
	* 7.1179	* 6.9733	* 7.4282	* 8.4459	* M-SUB-Q			

AT 75% POWER, 125 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.6586	* 0.8320	* 1.1025	* 0.9456	* 1.1654	* 0.9716	* 1.1441	* 0.5902
	* 2.5706	* 2.4760	* 1.8559	* 2.1542	* 1.7467	* 2.0964	* 1.8009	* 3.1428
9	* 0.8320	* 1.0570	* 0.9011	* 1.1400	* 0.9655	* 1.0558	* 1.1487	* 0.6063
	* 2.4760	* 1.9526	* 2.2752	* 1.7952	* 2.1082	* 1.9329	* 1.7789	* 3.0627
10	* 1.1025	* 0.8996	* 0.9757	* 1.0146	* 1.1251	* 1.0190	* 1.1089	* 0.5530
	* 1.8559	* 2.2790	* 2.1295	* 2.0185	* 1.8146	* 1.9955	* 1.8251	* 3.2912
11	* 0.9456	* 1.1379	* 1.0123	* 1.0774	* 0.9533	* 1.0525	* 1.0043	* 0.4954
	* 2.1542	* 1.7983	* 2.0229	* 1.8897	* 2.0713	* 1.8821	* 2.0092	* 3.6726
12	* 1.1654	* 0.9650	* 1.1238	* 0.9525	* 0.7253	* 0.8661	* 0.6097	*
	* 1.7467	* 2.1091	* 1.8167	* 2.0725	* 2.1862	* 1.9510	* 2.7932	*
13	* 0.9716	* 1.0554	* 1.0183	* 1.0518	* 0.8653	* 0.5052	* 0.3224	*
	* 2.0964	* 1.9336	* 1.9969	* 1.8832	* 1.9522	* 2.9821	* 4.8599	*
14	* 1.1441	* 1.1484	* 1.1084	* 1.0035	* 0.6089	* 0.3133	*	*
	* 1.8009	* 1.7793	* 1.8261	* 2.0108	* 2.7968	* 4.9519	*	*
15	* 0.5902	* 0.6063	* 0.5527	* 0.4950	* F-SUB-Q			
	* 3.1428	* 3.0635	* 3.2930	* 3.6753	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 99 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 125 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.8136	* 0.9981	* 1.2105	* 1.1394	* 1.3109	* 1.1938	* 1.3071	* 0.7138 *
	* 2.1590	* 2.1089	* 1.7326	* 1.8338	* 1.5891	* 1.7443	* 1.5908	* 2.6209 *
9	* 0.9981	* 1.2193	* 1.0837	* 1.2921	* 1.1624	* 1.3030	* 1.3174	* 0.7360 *
	* 2.1089	* 1.7311	* 1.9399	* 1.6189	* 1.7942	* 1.5971	* 1.5769	* 2.5569 *
10	* 1.2105	* 1.0802	* 1.1965	* 1.2168	* 1.2893	* 1.2544	* 1.2853	* 0.6789 *
	* 1.7326	* 1.9440	* 1.7609	* 1.7234	* 1.6253	* 1.6616	* 1.6128	* 2.7411 *
11	* 1.1394	* 1.2913	* 1.2139	* 1.2349	* 1.1502	* 1.2196	* 1.2174	* 0.6131 *
	* 1.8338	* 1.6198	* 1.7275	* 1.7061	* 1.7508	* 1.6592	* 1.7043	* 3.0448 *
12	* 1.3109	* 1.1619	* 1.2872	* 1.1492	* 0.8994	* 1.0347	* 0.7410 *	
	* 1.5891	* 1.7947	* 1.6269	* 1.7519	* 1.7817	* 1.7129	* 2.3571 *	
13	* 1.1938	* 1.3026	* 1.2537	* 1.2187	* 1.0338	* 0.6277	* 0.3957 *	
	* 1.7443	* 1.5977	* 1.6625	* 1.6603	* 1.7139	* 2.4682	* 4.0724 *	
14	* 1.3071	* 1.3170	* 1.2846	* 1.2165	* 0.7399	* 0.3872 *		
	* 1.5908	* 1.5773	* 1.6137	* 1.7056	* 2.3603	* 4.1204 *		
15	* 0.7138	* 0.7359	* 0.6786	* 0.6126	* F-SUB-Q			
	* 2.6209	* 2.5572	* 2.7426	* 3.0471	* M-SUB-Q			

AT 75% POWER, 125 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9065	* 1.1061	* 1.3682	* 1.2605	* 1.4987	* 1.3336	* 1.5040	* 0.7780 *
	* 2.0015	* 1.9609	* 1.5813	* 1.7083	* 1.4294	* 1.6023	* 1.4159	* 2.4630 *
9	* 1.1061	* 1.3847	* 1.2015	* 1.4619	* 1.2905	* 1.4764	* 1.5180	* 0.8039 *
	* 1.9609	* 1.5726	* 1.8031	* 1.4745	* 1.6626	* 1.4467	* 1.4032	* 2.3997 *
10	* 1.3682	* 1.1962	* 1.3363	* 1.3567	* 1.4635	* 1.4149	* 1.4872	* 0.7413 *
	* 1.5813	* 1.8110	* 1.6236	* 1.5939	* 1.4702	* 1.5125	* 1.4339	* 2.5822 *
11	* 1.2605	* 1.4606	* 1.3532	* 1.4006	* 1.2906	* 1.4132	* 1.4052	* 0.6741 *
	* 1.7083	* 1.4754	* 1.5980	* 1.5507	* 1.6094	* 1.4799	* 1.5212	* 2.8553 *
12	* 1.4987	* 1.2901	* 1.4624	* 1.2895	* 1.0074	* 1.1975	* 0.8157 *	
	* 1.4294	* 1.6631	* 1.4714	* 1.6105	* 1.6291	* 1.5356	* 2.2188 *	
13	* 1.3336	* 1.4759	* 1.4142	* 1.4121	* 1.1964	* 0.7081	* 0.4337 *	
	* 1.6023	* 1.4472	* 1.5133	* 1.4809	* 1.5366	* 2.2811	* 3.8676 *	
14	* 1.5040	* 1.5176	* 1.4864	* 1.4042	* 0.8151	* 0.4245 *		
	* 1.4159	* 1.4036	* 1.4347	* 1.5224	* 2.2202	* 3.9123 *		
15	* 0.7780	* 0.8038	* 0.7408	* 0.6735	* F-SUB-Q			
	* 2.4630	* 2.4000	* 2.5838	* 2.8576	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 100 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 125 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9686	* 1.1736	* 1.4667	* 1.3295	* 1.6054	* 1.4111	* 1.6195	* 0.8228
	* 1.9783	* 1.9310	* 1.5339	* 1.6771	* 1.3799	* 1.5658	* 1.3596	* 2.4094
9	* 1.1736	* 1.4801	* 1.2659	* 1.5637	* 1.3596	* 1.5712	* 1.6363	* 0.8536
	* 1.9310	* 1.5345	* 1.7799	* 1.4306	* 1.6322	* 1.4065	* 1.3468	* 2.3390
10	* 1.4667	* 1.2610	* 1.4092	* 1.4409	* 1.5663	* 1.5067	* 1.6093	* 0.7872
	* 1.5339	* 1.7854	* 1.6019	* 1.5578	* 1.4219	* 1.4688	* 1.3698	* 2.5163
11	* 1.3295	* 1.5606	* 1.4370	* 1.4997	* 1.3808	* 1.5384	* 1.5260	* 0.7199
	* 1.6771	* 1.4314	* 1.5620	* 1.5009	* 1.5715	* 1.4201	* 1.4523	* 2.7664
12	* 1.6054	* 1.3592	* 1.5649	* 1.3795	* 1.0861	* 1.3134	* 0.8809	*
	* 1.3799	* 1.6327	* 1.4231	* 1.5727	* 1.5937	* 1.4746	* 2.1561	*
13	* 1.4111	* 1.5706	* 1.5059	* 1.5371	* 1.3122	* 0.7737	* 0.4677	*
	* 1.5658	* 1.4071	* 1.4696	* 1.4212	* 1.4757	* 2.2179	* 3.7970	*
14	* 1.6195	* 1.6358	* 1.6083	* 1.5248	* 0.8803	* 0.4576	*	*
	* 1.3596	* 1.3472	* 1.3706	* 1.4535	* 2.1573	* 3.8420	*	*
15	* 0.8228	* 0.8535	* 0.7867	* 0.7192	* F-SUB-Q			
	* 2.4094	* 2.3393	* 2.5180	* 2.7686	* M-SUB-Q			

AT 75% POWER, 125 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0318	* 1.2292	* 1.5341	* 1.3768	* 1.6725	* 1.4636	* 1.6942	* 0.8562
	* 1.9963	* 1.9414	* 1.5319	* 1.6863	* 1.3756	* 1.5620	* 1.3449	* 2.3969
9	* 1.2292	* 1.5482	* 1.3115	* 1.6330	* 1.4089	* 1.6340	* 1.7147	* 0.8900
	* 1.9414	* 1.5379	* 1.7930	* 1.4310	* 1.6427	* 1.4011	* 1.3311	* 2.3226
10	* 1.5341	* 1.3085	* 1.4611	* 1.5024	* 1.6358	* 1.5714	* 1.6931	* 0.8235
	* 1.5319	* 1.7971	* 1.6137	* 1.5620	* 1.4211	* 1.4683	* 1.3560	* 2.4990
11	* 1.3768	* 1.6296	* 1.4982	* 1.5830	* 1.4581	* 1.6381	* 1.6166	* 0.7569
	* 1.6863	* 1.4318	* 1.5664	* 1.4949	* 1.5726	* 1.4070	* 1.4399	* 2.7551
12	* 1.6725	* 1.4072	* 1.6344	* 1.4567	* 1.1689	* 1.4204	* 0.9440	*
	* 1.3756	* 1.6432	* 1.4224	* 1.5738	* 1.6007	* 1.4649	* 2.1390	*
13	* 1.4636	* 1.6333	* 1.5705	* 1.6367	* 1.4190	* 0.8484	* 0.5044	*
	* 1.5620	* 1.4017	* 1.4692	* 1.4082	* 1.4660	* 2.2172	* 3.8025	*
14	* 1.6942	* 1.7138	* 1.6920	* 1.6153	* 0.9433	* 0.4933	*	*
	* 1.3449	* 1.3316	* 1.3569	* 1.4413	* 2.1403	* 3.8500	*	*
15	* 0.8562	* 0.8899	* 0.8230	* 0.7562	* F-SUB-Q			
	* 2.3969	* 2.3230	* 2.5007	* 2.7575	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 101 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 125 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1397	* 1.2916	* 1.6045	* 1.4218	* 1.7410	* 1.5147	* 1.7700	* 0.8783
	* 2.0194	* 1.9544	* 1.5488	* 1.7188	* 1.3874	* 1.5806	* 1.3466	* 2.4429
9	* 1.2916	* 1.6247	* 1.3592	* 1.7054	* 1.4590	* 1.6961	* 1.7967	* 0.9142
	* 1.9544	* 1.5588	* 1.8290	* 1.4476	* 1.6745	* 1.4148	* 1.3329	* 2.3655
10	* 1.6045	* 1.3560	* 1.5159	* 1.5659	* 1.7112	* 1.6374	* 1.7803	* 0.8473
	* 1.5488	* 1.8334	* 1.6464	* 1.5861	* 1.4361	* 1.4860	* 1.3587	* 2.5524
11	* 1.4218	* 1.7018	* 1.5614	* 1.6773	* 1.5494	* 1.7514	* 1.7153	* 0.7837
	* 1.7188	* 1.4484	* 1.5908	* 1.4898	* 1.5774	* 1.3962	* 1.4440	* 2.8164
12	* 1.7410	* 1.4572	* 1.7097	* 1.5479	* 1.2995	* 1.5620	* 1.0000	*
	* 1.3874	* 1.6751	* 1.4374	* 1.5787	* 1.6163	* 1.4639	* 2.1647	*
13	* 1.5147	* 1.6953	* 1.6363	* 1.7498	* 1.5606	* 0.9567	* 0.5405	*
	* 1.5806	* 1.4154	* 1.4871	* 1.3974	* 1.4651	* 2.2455	* 3.8799	*
14	* 1.7700	* 1.7957	* 1.7791	* 1.7137	* 0.9993	* 0.5278	*	*
	* 1.3466	* 1.3334	* 1.3597	* 1.4454	* 2.1659	* 3.9339	*	*
15	* 0.8783	* 0.9140	* 0.8467	* 0.7829	* F-SUB-Q			
	* 2.4429	* 2.3659	* 2.5542	* 2.8189	* M-SUB-Q			

AT 75% POWER, 125 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2480	* 1.3460	* 1.6551	* 1.4540	* 1.7877	* 1.5511	* 1.8226	* 0.8960
	* 2.0769	* 2.0095	* 1.6035	* 1.7866	* 1.4329	* 1.6333	* 1.3824	* 2.5302
9	* 1.3460	* 1.6837	* 1.3949	* 1.7582	* 1.4959	* 1.7407	* 1.8555	* 0.9338
	* 2.0095	* 1.6165	* 1.9032	* 1.4974	* 1.7411	* 1.4598	* 1.3683	* 2.4480
10	* 1.6551	* 1.3915	* 1.5574	* 1.6147	* 1.7911	* 1.6874	* 1.8445	* 0.8678
	* 1.6035	* 1.9078	* 1.7137	* 1.6443	* 1.4780	* 1.5357	* 1.3955	* 2.6443
11	* 1.4540	* 1.7541	* 1.6099	* 1.7548	* 1.6309	* 1.8465	* 1.7946	* 0.8074
	* 1.7865	* 1.4991	* 1.6493	* 1.5178	* 1.6098	* 1.4160	* 1.4655	* 2.9200
12	* 1.7877	* 1.4939	* 1.7894	* 1.6295	* 1.5110	* 1.7023	* 1.0546	*
	* 1.4329	* 1.7416	* 1.4794	* 1.6110	* 1.6471	* 1.4813	* 2.2059	*
13	* 1.5511	* 1.7398	* 1.6860	* 1.8448	* 1.7008	* 1.0682	* 0.5769	*
	* 1.6333	* 1.4606	* 1.5370	* 1.4172	* 1.4825	* 2.2924	* 3.9641	*
14	* 1.8226	* 1.8544	* 1.8431	* 1.7929	* 1.0539	* 0.5628	*	*
	* 1.3824	* 1.3689	* 1.3966	* 1.4670	* 2.2071	* 4.0237	*	*
15	* 0.8960	* 0.9336	* 0.8671	* 0.8065	* F-SUB-Q			
	* 2.5302	* 2.4485	* 2.6463	* 2.9228	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 102 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 125 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3234	* 1.3892	* 1.7007	* 1.4811	* 1.8310	* 1.5823	* 1.8708	* 0.9079 *
	* 2.1698	* 2.0766	* 1.6771	* 1.8782	* 1.4952	* 1.7079	* 1.4356	* 2.6593 *
9	* 1.3892	* 1.7357	* 1.4249	* 1.8063	* 1.5277	* 1.7803	* 1.9091	* 0.9450 *
	* 2.0766	* 1.6601	* 2.0022	* 1.5644	* 1.8299	* 1.5236	* 1.4211	* 2.5774 *
10	* 1.7007	* 1.4214	* 1.5942	* 1.6572	* 1.8611	* 1.7313	* 1.9030	* 0.8818 *
	* 1.6771	* 2.0072	* 1.7980	* 1.7233	* 1.5150	* 1.6050	* 1.4496	* 2.7812 *
11	* 1.4811	* 1.8020	* 1.6521	* 1.8219	* 1.6978	* 1.9292	* 1.8652	* 0.8232 *
	* 1.8782	* 1.5675	* 1.7287	* 1.5586	* 1.6654	* 1.4527	* 1.4946	* 3.0770 *
12	* 1.8310	* 1.5257	* 1.8593	* 1.6964	* 1.6175	* 1.8068	* 1.0949	*
	* 1.4952	* 1.8305	* 1.5165	* 1.6667	* 1.7090	* 1.5241	* 2.2923	*
13	* 1.5823	* 1.7793	* 1.7297	* 1.9273	* 1.8051	* 1.1415	* 0.6041	*
	* 1.7079	* 1.5245	* 1.6065	* 1.4541	* 1.5254	* 2.3799	* 4.1248	*
14	* 1.8708	* 1.9078	* 1.9014	* 1.8633	* 1.0942	* 0.5887	*	*
	* 1.4356	* 1.4217	* 1.4508	* 1.4961	* 2.2935	* 4.1916	*	*
15	* 0.9079	* 0.9448	* 0.8811	* 0.8223	* F-SUB-Q			
	* 2.6593	* 2.5780	* 2.7835	* 3.0801	* M-SUB-Q			

AT 75% POWER, 125 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3404	* 1.3984	* 1.6998	* 1.4829	* 1.8270	* 1.5850	* 1.8712	* 0.9212 *
	* 2.2896	* 2.1949	* 1.7995	* 2.0202	* 1.6120	* 1.8315	* 1.5407	* 2.8149 *
9	* 1.3984	* 1.7388	* 1.4281	* 1.8089	* 1.5312	* 1.7842	* 1.9131	* 0.9611 *
	* 2.1949	* 1.7614	* 2.1448	* 1.6789	* 1.9703	* 1.6339	* 1.5249	* 2.7185 *
10	* 1.6998	* 1.4249	* 1.5985	* 1.6650	* 1.8782	* 1.7397	* 1.9106	* 0.8992 *
	* 1.7995	* 2.1502	* 1.9048	* 1.8225	* 1.5958	* 1.7197	* 1.5558	* 2.9324 *
11	* 1.4829	* 1.8044	* 1.6598	* 1.8363	* 1.7182	* 1.9504	* 1.8834	* 0.8423 *
	* 2.0202	* 1.6830	* 1.8282	* 1.6434	* 1.7499	* 1.5286	* 1.5735	* 3.1921 *
12	* 1.8270	* 1.5291	* 1.8762	* 1.7168	* 1.6507	* 1.8415	* 1.1330	*
	* 1.6120	* 1.9710	* 1.5975	* 1.7512	* 1.8091	* 1.6098	* 2.3678	*
13	* 1.5850	* 1.7831	* 1.7379	* 1.9484	* 1.8398	* 1.1824	* 0.6277	*
	* 1.8315	* 1.6349	* 1.7214	* 1.5300	* 1.6113	* 2.5007	* 4.2937	*
14	* 1.8712	* 1.9117	* 1.9089	* 1.8814	* 1.1320	* 0.6118	*	*
	* 1.5407	* 1.5256	* 1.5572	* 1.5752	* 2.3697	* 4.3623	*	*
15	* 0.9212	* 0.9608	* 0.8984	* 0.8413	* F-SUB-Q			
	* 2.8149	* 2.7192	* 2.9348	* 3.1955	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 103 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 125 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3637	* 1.4198	* 1.7377	* 1.5010	* 1.8677	* 1.6106	* 1.9183	* 0.9199 *
	* 2.4046	* 2.3080	* 1.8765	* 2.1550	* 1.7019	* 1.9433	* 1.6184	* 3.0294 *
9	* 1.4198	* 1.7780	* 1.4476	* 1.8499	* 1.5531	* 1.8186	* 1.9644	* 0.9600 *
	* 2.3080	* 1.8384	* 2.2558	* 1.7503	* 2.0831	* 1.7288	* 1.6026	* 2.9295 *
10	* 1.7377	* 1.4456	* 1.6239	* 1.6960	* 1.9324	* 1.7746	* 1.9646	* 0.8990 *
	* 1.8765	* 2.2615	* 2.0005	* 1.9091	* 1.6562	* 1.7965	* 1.6140	* 3.1631 *
11	* 1.5010	* 1.8451	* 1.6905	* 1.8849	* 1.7571	* 2.0123	* 1.9408	* 0.8439 *
	* 2.1550	* 1.7546	* 1.9152	* 1.7088	* 1.8272	* 1.5831	* 1.6298	* 3.3971 *
12	* 1.8677	* 1.5510	* 1.9303	* 1.7557	* 1.6925	* 1.9029	* 1.1405	*
	* 1.7019	* 2.0859	* 1.6579	* 1.8286	* 1.8856	* 1.6653	* 2.5127	*
13	* 1.6106	* 1.8173	* 1.7725	* 2.0102	* 1.9011	* 1.2031	* 0.6320	*
	* 1.9433	* 1.7299	* 1.7985	* 1.5847	* 1.6668	* 2.6265	* 4.5511	*
14	* 1.9183	* 1.9628	* 1.9626	* 1.9386	* 1.1397	* 0.6149	*	*
	* 1.6184	* 1.6034	* 1.6155	* 1.6316	* 2.5142	* 4.6318	*	*
15	* 0.9199	* 0.9597	* 0.8981	* 0.8428	* F-SUB-Q			
	* 3.0294	* 2.9302	* 3.1659	* 3.4010	* M-SUB-Q			

AT 75% POWER, 125 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3644	* 1.4197	* 1.7411	* 1.5002	* 1.8731	* 1.6145	* 1.9299	* 0.9200 *
	* 2.4675	* 2.3608	* 1.9202	* 2.2239	* 1.7810	* 2.0659	* 1.7296	* 3.2628 *
9	* 1.4197	* 1.7820	* 1.4473	* 1.8562	* 1.5535	* 1.8255	* 1.9780	* 0.9614 *
	* 2.3608	* 1.8804	* 2.3104	* 1.8049	* 2.1539	* 1.8306	* 1.6924	* 3.1510 *
10	* 1.7411	* 1.4453	* 1.6246	* 1.7006	* 1.9472	* 1.7821	* 1.9799	* 0.9010 *
	* 1.9202	* 2.3160	* 2.0634	* 1.9713	* 1.7277	* 1.8813	* 1.6934	* 3.3576 *
11	* 1.5002	* 1.8514	* 1.6950	* 1.8960	* 1.7656	* 2.0312	* 1.9596	* 0.8470 *
	* 2.2239	* 1.8096	* 1.9778	* 1.7736	* 1.9076	* 1.6579	* 1.7164	* 3.5953 *
12	* 1.8731	* 1.5513	* 1.9450	* 1.7642	* 1.7033	* 1.9235	* 1.1485	*
	* 1.7810	* 2.1569	* 1.7296	* 1.9091	* 1.9804	* 1.7538	* 2.6573	*
13	* 1.6145	* 1.8241	* 1.7799	* 2.0290	* 1.9216	* 1.2129	* 0.6361	*
	* 2.0659	* 1.8320	* 1.8836	* 1.6597	* 1.7555	* 2.7822	* 4.8379	*
14	* 1.9299	* 1.9763	* 1.9778	* 1.9573	* 1.1477	* 0.6183	*	*
	* 1.7296	* 1.6938	* 1.6952	* 1.7185	* 2.6590	* 4.9282	*	*
15	* 0.9200	* 0.9611	* 0.9000	* 0.8459	* F-SUB-Q			
	* 3.2628	* 3.1518	* 3.3614	* 3.5999	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 104 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 125 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3466	* 1.4010	* 1.7140	* 1.4822	* 1.8470	* 1.5989	* 1.9094	* 0.9212 *
	* 2.4630	* 2.3559	* 1.9214	* 2.2136	* 1.7752	* 2.0484	* 1.7171	* 3.2141 *
9	* 1.4010	* 1.7557	* 1.4286	* 1.8322	* 1.5354	* 1.8083	* 1.9584	* 0.9629 *
	* 2.3559	* 1.8799	* 2.3057	* 1.8016	* 2.1472	* 1.8173	* 1.6836	* 3.0952 *
10	* 1.7140	* 1.4266	* 1.6042	* 1.6821	* 1.9282	* 1.7659	* 1.9614	* 0.9030 *
	* 1.9214	* 2.3106	* 2.0595	* 1.9641	* 1.7221	* 1.8710	* 1.6848	* 3.2941 *
11	* 1.4822	* 1.8273	* 1.6764	* 1.8750	* 1.7489	* 2.0129	* 1.9445	* 0.8494 *
	* 2.2136	* 1.8065	* 1.9707	* 1.7698	* 1.9012	* 1.6519	* 1.7076	* 3.5339 *
12	* 1.8470	* 1.5331	* 1.9259	* 1.7475	* 1.6892	* 1.9101	* 1.1573	*
	* 1.7752	* 2.1505	* 1.7241	* 1.9027	* 1.9820	* 1.7493	* 2.6052	*
13	* 1.5989	* 1.8068	* 1.7635	* 2.0106	* 1.9082	* 1.2146	* 0.6399	*
	* 2.0484	* 1.8188	* 1.8735	* 1.6538	* 1.7511	* 2.7566	* 4.7796	*
14	* 1.9094	* 1.9566	* 1.9592	* 1.9421	* 1.1563	* 0.6222	*	*
	* 1.7171	* 1.6852	* 1.6867	* 1.7098	* 2.6073	* 4.8676	*	*
15	* 0.9212	* 0.9625	* 0.9021	* 0.8482	* F-SUB-Q			
	* 3.2141	* 3.0963	* 3.2975	* 3.5386	* M-SUB-Q			

AT 75% POWER, 125 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3430	* 1.3972	* 1.7220	* 1.4778	* 1.8594	* 1.6030	* 1.9314	* 0.9072 *
	* 2.3664	* 2.2583	* 1.8328	* 2.1353	* 1.7069	* 1.9752	* 1.6429	* 3.1261 *
9	* 1.3972	* 1.7639	* 1.4250	* 1.8429	* 1.5321	* 1.8177	* 1.9817	* 0.9487 *
	* 2.2583	* 1.7930	* 2.2127	* 1.7291	* 2.0744	* 1.7556	* 1.6168	* 3.0154 *
10	* 1.7220	* 1.4230	* 1.6025	* 1.6854	* 1.9469	* 1.7737	* 1.9856	* 0.8913 *
	* 1.8328	* 2.2156	* 1.9859	* 1.8948	* 1.6624	* 1.8122	* 1.6206	* 3.2127 *
11	* 1.4778	* 1.8378	* 1.6795	* 1.8889	* 1.7541	* 2.0372	* 1.9696	* 0.8373 *
	* 2.1353	* 1.7336	* 1.9011	* 1.7059	* 1.8468	* 1.5973	* 1.6462	* 3.4479 *
12	* 1.8594	* 1.5298	* 1.9445	* 1.7527	* 1.6948	* 1.9317	* 1.1425	*
	* 1.7069	* 2.0773	* 1.6643	* 1.8481	* 1.9346	* 1.6924	* 2.5631	*
13	* 1.6030	* 1.8161	* 1.7711	* 2.0347	* 1.9297	* 1.2075	* 0.6297	*
	* 1.9752	* 1.7571	* 1.8147	* 1.5991	* 1.6941	* 2.6946	* 4.6724	*
14	* 1.9314	* 1.9797	* 1.9833	* 1.9670	* 1.1416	* 0.6112	*	*
	* 1.6429	* 1.6184	* 1.6224	* 1.6482	* 2.5646	* 4.7666	*	*
15	* 0.9072	* 0.9483	* 0.8902	* 0.8360	* F-SUB-Q			
	* 3.1261	* 3.0164	* 3.2166	* 3.4525	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 105 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 125 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3254	* 1.3791	* 1.7046	* 1.4597	* 1.8449	* 1.5906	* 1.9248	* 0.8950 *
	* 2.2140	* 2.1148	* 1.7010	* 1.9730	* 1.5682	* 1.8197	* 1.5091	* 2.8906 *
9	* 1.3791	* 1.7471	* 1.4070	* 1.8280	* 1.5140	* 1.8061	* 1.9756	* 0.9356 *
	* 2.1148	* 1.6742	* 2.0577	* 1.6041	* 1.9272	* 1.6149	* 1.4855	* 2.7878 *
10	* 1.7046	* 1.4050	* 1.5836	* 1.6694	* 1.9375	* 1.7613	* 1.9802	* 0.8803 *
	* 1.7010	* 2.0632	* 1.8552	* 1.7659	* 1.5434	* 1.6810	* 1.4959	* 2.9773 *
11	* 1.4597	* 1.8228	* 1.6634	* 1.8762	* 1.7390	* 2.0305	* 1.9659	* 0.8254 *
	* 1.9730	* 1.6081	* 1.7720	* 1.5875	* 1.7204	* 1.4789	* 1.5233	* 3.2292 *
12	* 1.8449	* 1.5117	* 1.9351	* 1.7376	* 1.6811	* 1.9259	* 1.1299	*
	* 1.5682	* 1.9299	* 1.5452	* 1.7217	* 1.8000	* 1.5663	* 2.3903	*
13	* 1.5906	* 1.8044	* 1.7586	* 2.0279	* 1.9239	* 1.1958	* 0.6208	*
	* 1.8197	* 1.6162	* 1.6834	* 1.4807	* 1.5679	* 2.5119	* 4.3742	*
14	* 1.9248	* 1.9736	* 1.9778	* 1.9632	* 1.1291	* 0.6019	*	*
	* 1.5091	* 1.4869	* 1.4976	* 1.5253	* 2.3917	* 4.4667	*	*
15	* 0.8950	* 0.9352	* 0.8791	* 0.8241	* F-SUB-Q			
	* 2.8906	* 2.7888	* 2.9805	* 3.2337	* M-SUB-Q			

AT 75% POWER, 125 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2997	* 1.3517	* 1.6720	* 1.4320	* 1.8141	* 1.5661	* 1.8988	* 0.8816 *
	* 2.0738	* 1.9637	* 1.5802	* 1.8403	* 1.4605	* 1.6946	* 1.4024	* 2.6954 *
9	* 1.3517	* 1.7154	* 1.3795	* 1.7971	* 1.4862	* 1.7804	* 1.9497	* 0.9234 *
	* 1.9637	* 1.5481	* 1.9136	* 1.4883	* 1.7928	* 1.5003	* 1.3762	* 2.5927 *
10	* 1.6720	* 1.3775	* 1.5547	* 1.6409	* 1.9094	* 1.7353	* 1.9547	* 0.8679 *
	* 1.5802	* 1.9188	* 1.7204	* 1.6355	* 1.4349	* 1.5558	* 1.3817	* 2.7622 *
11	* 1.4320	* 1.7919	* 1.6348	* 1.8465	* 1.7107	* 2.0030	* 1.9416	* 0.8158 *
	* 1.8403	* 1.4924	* 1.6413	* 1.4770	* 1.6081	* 1.3766	* 1.4100	* 2.9742 *
12	* 1.8141	* 1.4838	* 1.9069	* 1.7093	* 1.6548	* 1.9011	* 1.1167	*
	* 1.4605	* 1.7954	* 1.4366	* 1.6093	* 1.6963	* 1.4710	* 2.2296	*
13	* 1.5661	* 1.7787	* 1.7325	* 2.0004	* 1.8990	* 1.1798	* 0.6122	*
	* 1.6946	* 1.5016	* 1.5581	* 1.3782	* 1.4726	* 2.3639	* 4.1214	*
14	* 1.8988	* 1.9476	* 1.9521	* 1.9388	* 1.1158	* 0.5934	*	*
	* 1.4024	* 1.3776	* 1.3834	* 1.4119	* 2.2311	* 4.2099	*	*
15	* 0.8816	* 0.9230	* 0.8667	* 0.8144	* F-SUB-Q			
	* 2.6954	* 2.5937	* 2.7653	* 2.9786	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 106 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 125 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2632	* 1.3134	* 1.6194	* 1.3933	* 1.7611	* 1.5279	* 1.8486	* 0.8692 *
	* 2.0906	* 1.9973	* 1.6215	* 1.8851	* 1.4998	* 1.7333	* 1.4368	* 2.7335 *
9	* 1.3134	* 1.6639	* 1.3408	* 1.7454	* 1.4466	* 1.7371	* 1.8991	* 0.9106 *
	* 1.9973	* 1.5815	* 1.9576	* 1.5233	* 1.8334	* 1.5328	* 1.4062	* 2.6266 *
10	* 1.6194	* 1.3388	* 1.5123	* 1.5971	* 1.8581	* 1.6926	* 1.9041	* 0.8545 *
	* 1.6215	* 1.9588	* 1.7560	* 1.6682	* 1.4554	* 1.5847	* 1.4087	* 2.7901 *
11	* 1.3933	* 1.7403	* 1.5911	* 1.7953	* 1.6660	* 1.9501	* 1.8929	* 0.8041 *
	* 1.8851	* 1.5276	* 1.6742	* 1.5009	* 1.6263	* 1.3922	* 1.4284	* 2.9954 *
12	* 1.7611	* 1.4442	* 1.8556	* 1.6647	* 1.6129	* 1.8535	* 1.1041	*
	* 1.4998	* 1.8363	* 1.4573	* 1.6275	* 1.7030	* 1.4754	* 2.2146	*
13	* 1.5279	* 1.7353	* 1.6897	* 1.9475	* 1.8514	* 1.1592	* 0.6038	*
	* 1.7333	* 1.5343	* 1.5873	* 1.3939	* 1.4771	* 2.3556	* 4.0884	*
14	* 1.8486	* 1.8969	* 1.9015	* 1.8901	* 1.1031	* 0.5855	*	*
	* 1.4368	* 1.4077	* 1.4105	* 1.4304	* 2.2164	* 4.1747	*	*
15	* 0.8692	* 0.9102	* 0.8535	* 0.8028	* F-SUB-Q			
	* 2.7335	* 2.6277	* 2.7933	* 2.9999	* M-SUB-Q			

AT 75% POWER, 125 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2403	* 1.2887	* 1.5997	* 1.3663	* 1.7444	* 1.5066	* 1.8376	* 0.8392 *
	* 1.9628	* 1.8879	* 1.5262	* 1.7903	* 1.4101	* 1.6380	* 1.3464	* 2.6401 *
9	* 1.2887	* 1.6458	* 1.3158	* 1.7270	* 1.4194	* 1.7179	* 1.8883	* 0.8789 *
	* 1.8879	* 1.4844	* 1.8514	* 1.4314	* 1.7375	* 1.4432	* 1.3152	* 2.5387 *
10	* 1.5997	* 1.3137	* 1.4869	* 1.5736	* 1.8433	* 1.6715	* 1.8935	* 0.8275 *
	* 1.5262	* 1.8541	* 1.6591	* 1.5728	* 1.3582	* 1.4911	* 1.3155	* 2.6854 *
11	* 1.3663	* 1.7218	* 1.5676	* 1.7779	* 1.6419	* 1.9376	* 1.8824	* 0.7753 *
	* 1.7903	* 1.4356	* 1.5786	* 1.4041	* 1.5263	* 1.2947	* 1.3292	* 2.8862 *
12	* 1.7444	* 1.4170	* 1.8407	* 1.6406	* 1.5897	* 1.8395	* 1.0665	*
	* 1.4101	* 1.7401	* 1.3600	* 1.5274	* 1.5862	* 1.3683	* 2.1163	*
13	* 1.5066	* 1.7160	* 1.6685	* 1.9350	* 1.8373	* 1.1288	* 0.5813	*
	* 1.6380	* 1.4447	* 1.4936	* 1.2964	* 1.3698	* 2.2209	* 3.9121	*
14	* 1.8376	* 1.8861	* 1.8908	* 1.8795	* 1.0656	* 0.5626	*	*
	* 1.3464	* 1.3167	* 1.3173	* 1.3311	* 2.1177	* 4.0023	*	*
15	* 0.8392	* 0.8785	* 0.8263	* 0.7740	* F-SUB-Q			
	* 2.6401	* 2.5398	* 2.6892	* 2.8908	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 107 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 125 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2007	* 1.2460	* 1.5452	* 1.3211	* 1.6895	* 1.4617	* 1.7833	* 0.8109 *
	* 1.8978	* 1.8328	* 1.4849	* 1.7419	* 1.3691	* 1.5884	* 1.3046	* 2.5747 *
9	* 1.2460	* 1.5941	* 1.2725	* 1.6731	* 1.3735	* 1.6690	* 1.8336	* 0.8496 *
	* 1.8328	* 1.4391	* 1.7985	* 1.3882	* 1.6878	* 1.3965	* 1.2723	* 2.4744 *
10	* 1.5452	* 1.2705	* 1.4409	* 1.5250	* 1.7876	* 1.6227	* 1.8384	* 0.8000 *
	* 1.4849	* 1.8012	* 1.6081	* 1.5241	* 1.3122	* 1.4420	* 1.2716	* 2.6131 *
11	* 1.3211	* 1.6680	* 1.5190	* 1.7236	* 1.5914	* 1.8798	* 1.8275	* 0.7491 *
	* 1.7419	* 1.3923	* 1.5299	* 1.3580	* 1.4750	* 1.2488	* 1.2822	* 2.8066 *
12	* 1.6895	* 1.3711	* 1.7850	* 1.5902	* 1.5415	* 1.7847	* 1.0317	*
	* 1.3691	* 1.6904	* 1.3140	* 1.4761	* 1.5262	* 1.3168	* 2.0472	*
13	* 1.4617	* 1.6672	* 1.6196	* 1.8772	* 1.7826	* 1.0922	* 0.5611	*
	* 1.5884	* 1.3980	* 1.4446	* 1.2504	* 1.3183	* 2.1421	* 3.7921	*
14	* 1.7833	* 1.8313	* 1.8357	* 1.8246	* 1.0308	* 0.5428	*	*
	* 1.3046	* 1.2737	* 1.2734	* 1.2841	* 2.0486	* 3.8812	*	*
15	* 0.8109	* 0.8492	* 0.7988	* 0.7478	* F-SUB-Q			
	* 2.5747	* 2.4755	* 2.6169	* 2.8112	* M-SUB-Q			

AT 75% POWER, 125 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1416	* 1.1826	* 1.4499	* 1.2544	* 1.5894	* 1.3887	* 1.6768	* 0.7824 *
	* 1.8937	* 1.8333	* 1.5026	* 1.7429	* 1.3819	* 1.5879	* 1.3165	* 2.5399 *
9	* 1.1826	* 1.5029	* 1.2080	* 1.5774	* 1.3054	* 1.5845	* 1.7257	* 0.8201 *
	* 1.8333	* 1.4491	* 1.7991	* 1.3977	* 1.6863	* 1.3963	* 1.2824	* 2.4387 *
10	* 1.4499	* 1.2061	* 1.3709	* 1.4468	* 1.6827	* 1.5407	* 1.7296	* 0.7700 *
	* 1.5026	* 1.8017	* 1.6041	* 1.5241	* 1.3208	* 1.4405	* 1.2815	* 2.5801 *
11	* 1.2544	* 1.5725	* 1.4411	* 1.6253	* 1.5099	* 1.7677	* 1.7188	* 0.7233 *
	* 1.7429	* 1.4019	* 1.5299	* 1.3652	* 1.4728	* 1.2569	* 1.2908	* 2.7609 *
12	* 1.5894	* 1.3032	* 1.6803	* 1.5087	* 1.4639	* 1.6803	* 0.9969 *	
	* 1.3819	* 1.6890	* 1.3226	* 1.4739	* 1.5206	* 1.3226	* 2.0069 *	
13	* 1.3887	* 1.5827	* 1.5378	* 1.7651	* 1.6782	* 1.0459	* 0.5419 *	
	* 1.5879	* 1.3977	* 1.4431	* 1.2586	* 1.3242	* 2.1165	* 3.7223 *	
14	* 1.6768	* 1.7236	* 1.7270	* 1.7162	* 0.9959	* 0.5250 *		
	* 1.3165	* 1.2839	* 1.2833	* 1.2927	* 2.0088	* 3.8042 *		
15	* 0.7824	* 0.8197	* 0.7690	* 0.7221	* F-SUB-Q			
	* 2.5399	* 2.4398	* 2.5834	* 2.7654	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 108 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 125 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0893	* 1.1258	* 1.3748	* 1.1923	* 1.5076	* 1.3213	* 1.5873	* 0.7303
	* 1.9035	* 1.8467	* 1.5194	* 1.7579	* 1.3967	* 1.5999	* 1.3325	* 2.6118
9	* 1.1258	* 1.4305	* 1.1505	* 1.4996	* 1.2422	* 1.5087	* 1.6345	* 0.7652
	* 1.8467	* 1.4597	* 1.8115	* 1.4089	* 1.6983	* 1.4051	* 1.2968	* 2.5099
10	* 1.3748	* 1.1488	* 1.3099	* 1.3792	* 1.5962	* 1.4668	* 1.6374	* 0.7197
	* 1.5194	* 1.8141	* 1.6089	* 1.5316	* 1.3333	* 1.4490	* 1.2962	* 2.6498
11	* 1.1923	* 1.4951	* 1.3738	* 1.5446	* 1.4377	* 1.6734	* 1.6244	* 0.6737
	* 1.7579	* 1.4131	* 1.5375	* 1.3757	* 1.4804	* 1.2699	* 1.3069	* 2.8446
12	* 1.5076	* 1.2403	* 1.5940	* 1.4366	* 1.3942	* 1.5876	* 0.9273	*
	* 1.3967	* 1.7008	* 1.3351	* 1.4815	* 1.5277	* 1.3388	* 2.0663	*
13	* 1.3213	* 1.5070	* 1.4640	* 1.6711	* 1.5856	* 0.9794	* 0.5050	*
	* 1.5999	* 1.4065	* 1.4516	* 1.2717	* 1.3404	* 2.1639	* 3.8300	*
14	* 1.5873	* 1.6324	* 1.6350	* 1.6219	* 0.9263	* 0.4887	*	*
	* 1.3325	* 1.2984	* 1.2981	* 1.3088	* 2.0682	* 3.9196	*	*
15	* 0.7303	* 0.7648	* 0.7186	* 0.6724	* F-SUB-Q			
	* 2.6118	* 2.5111	* 2.6537	* 2.8493	* M-SUB-Q			

AT 75% POWER, 125 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9905	* 1.0318	* 1.2468	* 1.0938	* 1.3519	* 1.1996	* 1.4174	* 0.6682
	* 2.0275	* 1.9504	* 1.6209	* 1.8541	* 1.5068	* 1.7048	* 1.4441	* 2.7674
9	* 1.0318	* 1.2912	* 1.0555	* 1.3576	* 1.1405	* 1.3625	* 1.4565	* 0.6983
	* 1.9504	* 1.5653	* 1.9121	* 1.5051	* 1.7892	* 1.5046	* 1.4074	* 2.6659
10	* 1.2468	* 1.0534	* 1.1950	* 1.2623	* 1.4329	* 1.3272	* 1.4571	* 0.6560
	* 1.6209	* 1.9148	* 1.7057	* 1.6179	* 1.4355	* 1.5480	* 1.4083	* 2.8175
11	* 1.0938	* 1.3536	* 1.2575	* 1.3964	* 1.3119	* 1.4908	* 1.4483	* 0.6105
	* 1.8541	* 1.5094	* 1.6239	* 1.4707	* 1.5673	* 1.3769	* 1.4167	* 3.0422
12	* 1.3519	* 1.1389	* 1.4309	* 1.3109	* 1.2629	* 1.4177	* 0.8451	*
	* 1.5068	* 1.7917	* 1.4374	* 1.5684	* 1.6298	* 1.4486	* 2.1941	*
13	* 1.1996	* 1.3611	* 1.3247	* 1.4888	* 1.4161	* 0.8845	* 0.4604	*
	* 1.7048	* 1.5060	* 1.5507	* 1.3788	* 1.4503	* 2.3181	* 4.0722	*
14	* 1.4174	* 1.4547	* 1.4549	* 1.4461	* 0.8438	* 0.4452	*	*
	* 1.4441	* 1.4091	* 1.4103	* 1.4187	* 2.1972	* 4.1703	*	*
15	* 0.6682	* 0.6980	* 0.6550	* 0.6094	* F-SUB-Q			
	* 2.7674	* 2.6670	* 2.8215	* 3.0472	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 109 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 125 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.7890	* 0.8460	* 1.1192	* 0.8959	* 1.1712	* 0.9567	* 1.2063	* 0.5534 *
	* 2.4858	* 2.3225	* 1.7608	* 2.2087	* 1.6945	* 2.0850	* 1.6547	* 3.2657 *
9	* 0.8460	* 1.1096	* 0.8679	* 1.1648	* 0.9367	* 1.0823	* 1.2291	* 0.5764 *
	* 2.3225	* 1.7743	* 2.2728	* 1.7056	* 2.1237	* 1.8460	* 1.6264	* 3.1564 *
10	* 1.1192	* 0.8658	* 0.9600	* 1.0354	* 1.2236	* 1.0588	* 1.2220	* 0.5349 *
	* 1.7608	* 2.2774	* 2.0711	* 1.9229	* 1.6350	* 1.8911	* 1.6370	* 3.3770 *
11	* 0.8959	* 1.1612	* 1.0319	* 1.2108	* 1.0683	* 1.2513	* 1.1773	* 0.4953 *
	* 2.2087	* 1.7108	* 1.9295	* 1.6533	* 1.8743	* 1.5986	* 1.6986	* 3.6651 *
12	* 1.1712	* 0.9353	* 1.2218	* 1.0676	* 0.9853	* 1.1827	* 0.6979	*
	* 1.6945	* 2.1266	* 1.6373	* 1.8755	* 2.0353	* 1.6923	* 2.5942	*
13	* 0.9567	* 1.0812	* 1.0571	* 1.2498	* 1.1816	* 0.7102	* 0.3773	*
	* 2.0850	* 1.8477	* 1.8942	* 1.6005	* 1.6939	* 2.8185	* 4.8606	*
14	* 1.2063	* 1.2279	* 1.2205	* 1.1756	* 0.6964	* 0.3651	*	*
	* 1.6547	* 1.6280	* 1.6390	* 1.7010	* 2.5996	* 4.9735	*	*
15	* 0.5534	* 0.5762	* 0.5342	* 0.4945	* F-SUB-Q			
	* 3.2657	* 3.1576	* 3.3815	* 3.6708	* M-SUB-Q			

AT 75% POWER, 125 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.3380	* 0.3661	* 0.4446	* 0.3895	* 0.4638	* 0.3917	* 0.4399	* 0.2311 *
	* 5.6916	* 5.2622	* 4.3409	* 4.9794	* 4.1877	* 4.9859	* 4.4431	* 7.6769 *
9	* 0.3661	* 0.4291	* 0.3777	* 0.4650	* 0.4079	* 0.4182	* 0.4458	* 0.2378 *
	* 5.2622	* 4.4924	* 5.1216	* 4.1810	* 4.7761	* 4.6743	* 4.3895	* 7.5075 *
10	* 0.4446	* 0.3768	* 0.3857	* 0.4305	* 0.4846	* 0.4208	* 0.4423	* 0.2244 *
	* 4.3409	* 5.1327	* 5.0459	* 4.5274	* 4.0329	* 4.6517	* 4.4270	* 7.9014 *
11	* 0.3895	* 0.4637	* 0.4293	* 0.4808	* 0.4285	* 0.4806	* 0.4218	* 0.2031 *
	* 4.9794	* 4.1925	* 4.5406	* 4.0660	* 4.5671	* 4.0742	* 4.6449	* 8.7736 *
12	* 0.4638	* 0.4073	* 0.4839	* 0.4282	* 0.3841	* 0.4299	* 0.2895	*
	* 4.1877	* 4.7832	* 4.0390	* 4.5704	* 5.1055	* 4.5606	* 6.1332	*
13	* 0.3917	* 0.4178	* 0.4202	* 0.4800	* 0.4295	* 0.3018	* 0.1583	*
	* 4.9859	* 4.6783	* 4.6587	* 4.0790	* 4.5649	* 6.5012	* 11.3785	*
14	* 0.4399	* 0.4453	* 0.4417	* 0.4212	* 0.2889	* 0.1557	*	*
	* 4.4431	* 4.3937	* 4.4323	* 4.6515	* 6.1461	* 11.4565	*	*
15	* 0.2311	* 0.2378	* 0.2241	* 0.2028	* F-SUB-Q			
	* 7.6769	* 7.5103	* 7.9098	* 8.7867	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 110 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 250 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.3184	* 0.4051	* 0.5071	* 0.4615	* 0.5285	* 0.4494	* 0.4807	* 0.2703
	* 5.1523	* 5.0262	* 4.0727	* 4.3657	* 3.8898	* 4.5022	* 4.3444	* 6.8955
9	* 0.4051	* 0.4749	* 0.4421	* 0.5250	* 0.4705	* 0.4620	* 0.4816	* 0.2775
	* 5.0262	* 4.4063	* 4.6047	* 3.9292	* 4.2817	* 4.4007	* 4.3301	* 6.7616
10	* 0.5071	* 0.4415	* 0.4452	* 0.4815	* 0.5199	* 0.4553	* 0.4642	* 0.2545
	* 4.0727	* 4.6124	* 4.6115	* 4.2414	* 3.9591	* 4.3784	* 4.4073	* 7.1637
11	* 0.4615	* 0.5242	* 0.4805	* 0.4990	* 0.4353	* 0.4649	* 0.4232	* 0.2248
	* 4.3657	* 3.9327	* 4.2482	* 4.1811	* 4.5169	* 4.3420	* 4.8104	* 8.1143
12	* 0.5285	* 0.4701	* 0.5194	* 0.4350	* 0.3263	* 0.3641	* 0.2773	*
	* 3.8898	* 4.2860	* 3.9631	* 4.5194	* 4.8904	* 4.7079	* 6.1892	*
13	* 0.4494	* 0.4618	* 0.4550	* 0.4646	* 0.3638	* 0.2383	* 0.1520	*
	* 4.5022	* 4.4022	* 4.3811	* 4.3443	* 4.7104	* 6.3347	* 10.3647	*
14	* 0.4807	* 0.4815	* 0.4640	* 0.4229	* 0.2770	* 0.1479	*	*
	* 4.3444	* 4.3315	* 4.4092	* 4.8132	* 6.1960	* 10.5445	*	*
15	* 0.2703	* 0.2775	* 0.2544	* 0.2246	* F-SUB-Q			
	* 6.8955	* 6.7623	* 7.1667	* 8.1197	* M-SUB-Q			

AT 75% POWER, 250 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.6773	* 0.8637	* 1.1362	* 0.9787	* 1.1855	* 0.9847	* 1.1591	* 0.6146
	* 2.5782	* 2.4251	* 1.8689	* 2.1212	* 1.7872	* 2.1105	* 1.8546	* 3.1255
9	* 0.8637	* 1.0884	* 0.9386	* 1.1791	* 0.9946	* 1.0704	* 1.1626	* 0.6304
	* 2.4251	* 1.9631	* 2.2248	* 1.8029	* 2.0865	* 1.9479	* 1.8324	* 3.0486
10	* 1.1362	* 0.9372	* 1.0045	* 1.0467	* 1.1629	* 1.0384	* 1.1252	* 0.5752
	* 1.8689	* 2.2288	* 2.0975	* 2.0025	* 1.8228	* 1.9806	* 1.8710	* 3.2554
11	* 0.9787	* 1.1773	* 1.0445	* 1.1162	* 0.9818	* 1.0672	* 1.0240	* 0.5179
	* 2.1212	* 1.8050	* 2.0058	* 1.9012	* 2.0319	* 1.9300	* 2.0431	* 3.6291
12	* 1.1855	* 0.9937	* 1.1617	* 0.9811	* 0.7413	* 0.8834	* 0.6259	*
	* 1.7872	* 2.0885	* 1.8245	* 2.0331	* 2.1598	* 1.9876	* 2.8028	*
13	* 0.9847	* 1.0701	* 1.0378	* 1.0666	* 0.8827	* 0.5200	* 0.3452	*
	* 2.1105	* 1.9484	* 1.9816	* 1.9309	* 1.9886	* 2.9810	* 4.6715	*
14	* 1.1591	* 1.1624	* 1.1247	* 1.0234	* 0.6251	* 0.3356	*	*
	* 1.8546	* 1.8328	* 1.8717	* 2.0443	* 2.8061	* 4.7573	*	*
15	* 0.6146	* 0.6303	* 0.5750	* 0.5176	* F-SUB-Q			
	* 3.1255	* 3.0491	* 3.2567	* 3.6313	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 111 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 250 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.8419	* 1.0502	* 1.3489	* 1.1923	* 1.4146	* 1.2061	* 1.3895	* 0.7535 *
	* 2.1787	* 2.0401	* 1.6077	* 1.7803	* 1.5302	* 1.7563	* 1.5546	* 2.5635 *
9	* 1.0502	* 1.2869	* 1.1397	* 1.3786	* 1.2044	* 1.3194	* 1.3958	* 0.7775 *
	* 2.0401	* 1.6918	* 1.8698	* 1.5723	* 1.7614	* 1.6059	* 1.5451	* 2.4984 *
10	* 1.3489	* 1.1378	* 1.2258	* 1.2670	* 1.3692	* 1.2727	* 1.3573	* 0.7140 *
	* 1.6077	* 1.8735	* 1.7356	* 1.6873	* 1.5843	* 1.6509	* 1.5816	* 2.6723 *
11	* 1.1923	* 1.3776	* 1.2644	* 1.2982	* 1.1957	* 1.2955	* 1.2534	* 0.6444 *
	* 1.7803	* 1.5738	* 1.6905	* 1.6591	* 1.7004	* 1.6194	* 1.7080	* 2.9812 *
12	* 1.4146	* 1.2033	* 1.3672	* 1.1949	* 0.9241	* 1.0826	* 0.7715 *	
	* 1.5302	* 1.7632	* 1.5866	* 1.7015	* 1.7699	* 1.6830	* 2.3199 *	
13	* 1.2061	* 1.3190	* 1.2721	* 1.2948	* 1.0818	* 0.6553	* 0.4249 *	
	* 1.7563	* 1.6063	* 1.6516	* 1.6202	* 1.6839	* 2.4316	* 3.8815 *	
14	* 1.3895	* 1.3956	* 1.3567	* 1.2527	* 0.7708	* 0.4158 *		
	* 1.5546	* 1.5454	* 1.5823	* 1.7090	* 2.3216	* 3.9266 *		
15	* 0.7535	* 0.7774	* 0.7137	* 0.6440	* F-SUB-Q			
	* 2.5635	* 2.4986	* 2.6734	* 2.9829	* M-SUB-Q			

AT 75% POWER, 250 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9306	* 1.1652	* 1.5397	* 1.3215	* 1.6135	* 1.3357	* 1.5917	* 0.8221 *
	* 2.0250	* 1.8874	* 1.4440	* 1.6464	* 1.3740	* 1.6217	* 1.3831	* 2.3942 *
9	* 1.1652	* 1.4660	* 1.2633	* 1.5692	* 1.3339	* 1.4781	* 1.5998	* 0.8486 *
	* 1.8874	* 1.5222	* 1.7294	* 1.4155	* 1.6299	* 1.4640	* 1.3754	* 2.3343 *
10	* 1.5397	* 1.2610	* 1.3583	* 1.4104	* 1.5556	* 1.4200	* 1.5589	* 0.7768 *
	* 1.4440	* 1.7331	* 1.6033	* 1.5535	* 1.4293	* 1.5156	* 1.4079	* 2.5124 *
11	* 1.3215	* 1.5672	* 1.4073	* 1.4754	* 1.3345	* 1.4880	* 1.4387	* 0.7043 *
	* 1.6464	* 1.4173	* 1.5566	* 1.4871	* 1.5591	* 1.4439	* 1.5188	* 2.7946 *
12	* 1.6135	* 1.3327	* 1.5531	* 1.3335	* 1.0247	* 1.2428	* 0.8437 *	
	* 1.3740	* 1.6316	* 1.4315	* 1.5602	* 1.6279	* 1.4998	* 2.1774 *	
13	* 1.3357	* 1.4777	* 1.4193	* 1.4871	* 1.2418	* 0.7308	* 0.4616 *	
	* 1.6217	* 1.4643	* 1.5163	* 1.4446	* 1.5006	* 2.2491	* 3.6795 *	
14	* 1.5917	* 1.5995	* 1.5583	* 1.4378	* 0.8427	* 0.4521 *		
	* 1.3831	* 1.3756	* 1.4084	* 1.5197	* 2.1798	* 3.7198 *		
15	* 0.8221	* 0.8485	* 0.7764	* 0.7039	* F-SUB-Q			
	* 2.3942	* 2.3345	* 2.5135	* 2.7962	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 112 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 250 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9798	* 1.2233	* 1.6375	* 1.3834	* 1.7093	* 1.3919	* 1.6891	* 0.8591 *
	* 2.0058	* 1.8573	* 1.3994	* 1.6175	* 1.3329	* 1.5976	* 1.3393	* 2.3555 *
9	* 1.2233	* 1.5553	* 1.3236	* 1.6684	* 1.3951	* 1.5484	* 1.6983	* 0.8906 *
	* 1.8573	* 1.4826	* 1.7018	* 1.3712	* 1.6025	* 1.4374	* 1.3320	* 2.2873 *
10	* 1.6375	* 1.3211	* 1.4170	* 1.4822	* 1.6504	* 1.4857	* 1.6583	* 0.8140 *
	* 1.3994	* 1.7056	* 1.5856	* 1.5216	* 1.3859	* 1.4875	* 1.3586	* 2.4651 *
11	* 1.3834	* 1.6651	* 1.4789	* 1.5756	* 1.4062	* 1.5847	* 1.5373	* 0.7411 *
	* 1.6175	* 1.3729	* 1.5247	* 1.4347	* 1.5285	* 1.3989	* 1.4611	* 2.7258 *
12	* 1.7093	* 1.3938	* 1.6478	* 1.4051	* 1.0827	* 1.3304	* 0.8928 *	
	* 1.3329	* 1.6042	* 1.3881	* 1.5296	* 1.6041	* 1.4501	* 2.1298 *	
13	* 1.3919	* 1.5480	* 1.4850	* 1.5838	* 1.3294	* 0.7781	* 0.4869 *	
	* 1.5976	* 1.4377	* 1.4881	* 1.3996	* 1.4509	* 2.2009	* 3.6294 *	
14	* 1.6891	* 1.6980	* 1.6577	* 1.5364	* 0.8918	* 0.4768 *		
	* 1.3393	* 1.3323	* 1.3592	* 1.4620	* 2.1319	* 3.6700 *		
15	* 0.8591	* 0.8906	* 0.8137	* 0.7407	* F-SUB-Q			
	* 2.3555	* 2.2875	* 2.4662	* 2.7273	* M-SUB-Q			

AT 75% POWER, 250 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0160	* 1.2589	* 1.6904	* 1.4150	* 1.7564	* 1.4194	* 1.7357	* 0.8798 *
	* 2.0296	* 1.8758	* 1.4036	* 1.6351	* 1.3396	* 1.6111	* 1.3402	* 2.3664 *
9	* 1.2589	* 1.6059	* 1.3568	* 1.7224	* 1.4270	* 1.5812	* 1.7460	* 0.9141 *
	* 1.8758	* 1.4890	* 1.7189	* 1.3735	* 1.6211	* 1.4480	* 1.3322	* 2.2928 *
10	* 1.6904	* 1.3542	* 1.4485	* 1.5229	* 1.7035	* 1.5195	* 1.7093	* 0.8386 *
	* 1.4036	* 1.7228	* 1.6055	* 1.5343	* 1.3892	* 1.5055	* 1.3613	* 2.4672 *
11	* 1.4150	* 1.7189	* 1.5193	* 1.6346	* 1.4507	* 1.6425	* 1.5935	* 0.7643 *
	* 1.6351	* 1.3763	* 1.5375	* 1.4334	* 1.5400	* 1.4020	* 1.4662	* 2.7423 *
12	* 1.7564	* 1.4256	* 1.7014	* 1.4496	* 1.1268	* 1.3884	* 0.9308 *	
	* 1.3396	* 1.6229	* 1.3907	* 1.5410	* 1.6253	* 1.4569	* 2.1344 *	
13	* 1.4194	* 1.5807	* 1.5187	* 1.6415	* 1.3873	* 0.8173	* 0.5092 *	
	* 1.6111	* 1.4483	* 1.5062	* 1.4027	* 1.4577	* 2.2191	* 3.6633 *	
14	* 1.7357	* 1.7457	* 1.7087	* 1.5926	* 0.9303	* 0.4984 *		
	* 1.3402	* 1.3325	* 1.3618	* 1.4671	* 2.1353	* 3.7060 *		
15	* 0.8798	* 0.9140	* 0.8382	* 0.7639	* F-SUB-Q			
	* 2.3664	* 2.2930	* 2.4683	* 2.7439	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 113 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 250 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0541 *	* 1.2962 *	* 1.7441 *	* 1.4425 *	* 1.8026 *	* 1.4430 *	* 1.7812 *	* 0.8881 *
	* 2.0599 *	* 1.8945 *	* 1.4265 *	* 1.6768 *	* 1.3628 *	* 1.6483 *	* 1.3564 *	* 2.4342 *
9	* 1.2962 *	* 1.6630 *	* 1.3875 *	* 1.7770 *	* 1.4557 *	* 1.6112 *	* 1.7931 *	* 0.9233 *
	* 1.8945 *	* 1.5137 *	* 1.7626 *	* 1.3929 *	* 1.6634 *	* 1.4791 *	* 1.3488 *	* 2.3583 *
10	* 1.7441 *	* 1.3848 *	* 1.4806 *	* 1.5627 *	* 1.7648 *	* 1.5530 *	* 1.7617 *	* 0.8461 *
	* 1.4265 *	* 1.7667 *	* 1.6484 *	* 1.5687 *	* 1.4082 *	* 1.5421 *	* 1.3804 *	* 2.5507 *
11	* 1.4425 *	* 1.7733 *	* 1.5590 *	* 1.7012 *	* 1.5000 *	* 1.7097 *	* 1.6549 *	* 0.7764 *
	* 1.6768 *	* 1.3958 *	* 1.5721 *	* 1.4360 *	* 1.5572 *	* 1.4082 *	* 1.4821 *	* 2.8335 *
12	* 1.8026 *	* 1.4544 *	* 1.7625 *	* 1.4990 *	* 1.1746 *	* 1.4612 *	* 0.9595 *	
	* 1.3628 *	* 1.6652 *	* 1.4100 *	* 1.5583 *	* 1.6568 *	* 1.4705 *	* 2.1837 *	
13	* 1.4430 *	* 1.6107 *	* 1.5522 *	* 1.7087 *	* 1.4601 *	* 0.8637 *	* 0.5290 *	
	* 1.6483 *	* 1.4795 *	* 1.5428 *	* 1.4089 *	* 1.4713 *	* 2.2688 *	* 3.7709 *	
14	* 1.7812 *	* 1.7927 *	* 1.7610 *	* 1.6539 *	* 0.9586 *	* 0.5171 *		
	* 1.3564 *	* 1.3491 *	* 1.3810 *	* 1.4830 *	* 2.1854 *	* 3.8198 *		
15	* 0.8881 *	* 0.9232 *	* 0.8457 *	* 0.7760 *	* F-SUB-Q			
	* 2.4342 *	* 2.3585 *	* 2.5519 *	* 2.8351 *	* M-SUB-Q			

AT 75% POWER, 250 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1344 *	* 1.3331 *	* 1.7803 *	* 1.4584 *	* 1.8286 *	* 1.4544 *	* 1.8051 *	* 0.8929 *
	* 2.1252 *	* 1.9541 *	* 1.4828 *	* 1.7522 *	* 1.4174 *	* 1.7190 *	* 1.4053 *	* 2.5412 *
9	* 1.3331 *	* 1.7084 *	* 1.4089 *	* 1.8112 *	* 1.4746 *	* 1.6269 *	* 1.8188 *	* 0.9292 *
	* 1.9541 *	* 1.5641 *	* 1.8414 *	* 1.4457 *	* 1.7388 *	* 1.5412 *	* 1.3977 *	* 2.4608 *
10	* 1.7803 *	* 1.4061 *	* 1.5034 *	* 1.5914 *	* 1.8092 *	* 1.5766 *	* 1.7947 *	* 0.8533 *
	* 1.4828 *	* 1.8457 *	* 1.7247 *	* 1.6354 *	* 1.4604 *	* 1.6097 *	* 1.4319 *	* 2.6659 *
11	* 1.4584 *	* 1.8074 *	* 1.5876 *	* 1.7582 *	* 1.5489 *	* 1.7698 *	* 1.7031 *	* 0.7875 *
	* 1.7522 *	* 1.4487 *	* 1.6391 *	* 1.4678 *	* 1.5998 *	* 1.4410 *	* 1.5163 *	* 2.9646 *
12	* 1.8286 *	* 1.4732 *	* 1.8072 *	* 1.5479 *	* 1.2670 *	* 1.5494 *	* 0.9947 *	
	* 1.4174 *	* 1.7407 *	* 1.4623 *	* 1.6009 *	* 1.7017 *	* 1.5017 *	* 2.2438 *	
13	* 1.4544 *	* 1.6263 *	* 1.5758 *	* 1.7688 *	* 1.5484 *	* 0.9448 *	* 0.5555 *	
	* 1.7190 *	* 1.5416 *	* 1.6106 *	* 1.4418 *	* 1.5025 *	* 2.3347 *	* 3.8836 *	
14	* 1.8051 *	* 1.8184 *	* 1.7939 *	* 1.7021 *	* 0.9940 *	* 0.5424 *		
	* 1.4053 *	* 1.3980 *	* 1.4325 *	* 1.5173 *	* 2.2453 *	* 3.9380 *		
15	* 0.8929 *	* 0.9291 *	* 0.8530 *	* 0.7870 *	* F-SUB-Q			
	* 2.5412 *	* 2.4610 *	* 2.6671 *	* 2.9664 *	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 114 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 250 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2301	* 1.3724	* 1.8175	* 1.4727	* 1.8548	* 1.4644	* 1.8286	* 0.8939
	* 2.2230	* 2.0287	* 1.5556	* 1.8495	* 1.4874	* 1.8108	* 1.4698	* 2.6879
9	* 1.3724	* 1.7575	* 1.4294	* 1.8456	* 1.4928	* 1.6419	* 1.8453	* 0.9286
	* 2.0287	* 1.6128	* 1.9435	* 1.5143	* 1.8355	* 1.6210	* 1.4621	* 2.6085
10	* 1.8175	* 1.4266	* 1.5273	* 1.6194	* 1.8561	* 1.6004	* 1.8279	* 0.8564
	* 1.5556	* 1.9481	* 1.8172	* 1.7220	* 1.5064	* 1.6962	* 1.4991	* 2.8243
11	* 1.4727	* 1.8417	* 1.6155	* 1.8236	* 1.6066	* 1.8347	* 1.7527	* 0.7937
	* 1.8495	* 1.5176	* 1.7259	* 1.5179	* 1.6641	* 1.4923	* 1.5642	* 3.1463
12	* 1.8548	* 1.4913	* 1.8540	* 1.6057	* 1.4229	* 1.6788	* 1.0277	*
	* 1.4874	* 1.8375	* 1.5080	* 1.6651	* 1.7753	* 1.5548	* 2.3471	*
13	* 1.4644	* 1.6413	* 1.5995	* 1.8337	* 1.6778	* 1.0398	* 0.5821	*
	* 1.8108	* 1.6215	* 1.6971	* 1.4930	* 1.5556	* 2.4379	* 4.0651	*
14	* 1.8286	* 1.8446	* 1.8271	* 1.7516	* 1.0270	* 0.5679	*	*
	* 1.4698	* 1.4624	* 1.4998	* 1.5652	* 2.3485	* 4.1267	*	*
15	* 0.8939	* 0.9285	* 0.8560	* 0.7932	* F-SUB-Q			
	* 2.6879	* 2.6088	* 2.8257	* 3.1484	* M-SUB-Q			

AT 75% POWER, 250 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2834	* 1.3878	* 1.8132	* 1.4666	* 1.8403	* 1.4539	* 1.8117	* 0.8992
	* 2.3472	* 2.1438	* 1.6710	* 1.9936	* 1.6076	* 1.9491	* 1.5841	* 2.8560
9	* 1.3878	* 1.7646	* 1.4292	* 1.8373	* 1.4912	* 1.6308	* 1.8323	* 0.9367
	* 2.1438	* 1.7105	* 2.0846	* 1.6349	* 1.9763	* 1.7452	* 1.5757	* 2.7604
10	* 1.8132	* 1.4266	* 1.5285	* 1.6215	* 1.8609	* 1.5989	* 1.8195	* 0.8681
	* 1.6710	* 2.0895	* 1.9264	* 1.8250	* 1.5957	* 1.8044	* 1.6169	* 2.9832
11	* 1.4666	* 1.8333	* 1.6177	* 1.8432	* 1.6309	* 1.8521	* 1.7602	* 0.8070
	* 1.9936	* 1.6384	* 1.8288	* 1.6044	* 1.7588	* 1.5804	* 1.6555	* 3.2783
12	* 1.8403	* 1.4897	* 1.8588	* 1.6300	* 1.4963	* 1.7349	* 1.0647	*
	* 1.6076	* 1.9785	* 1.5974	* 1.7599	* 1.8912	* 1.6581	* 2.4417	*
13	* 1.4539	* 1.6301	* 1.5978	* 1.8511	* 1.7339	* 1.1036	* 0.6093	*
	* 1.9491	* 1.7458	* 1.8058	* 1.5812	* 1.6591	* 2.5704	* 4.2527	*
14	* 1.8117	* 1.8316	* 1.8187	* 1.7591	* 1.0642	* 0.5947	*	*
	* 1.5841	* 1.5761	* 1.6177	* 1.6565	* 2.4427	* 4.3148	*	*
15	* 0.8992	* 0.9366	* 0.8677	* 0.8064	* F-SUB-Q			
	* 2.8560	* 2.7607	* 2.9846	* 3.2804	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 115 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 250 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3086	* 1.4108	* 1.8527	* 1.4804	* 1.8727	* 1.4652	* 1.8436	* 0.8917 *
	* 2.4720	* 2.2575	* 1.7441	* 2.1277	* 1.7007	* 2.0762	* 1.6701	* 3.0812 *
9	* 1.4108	* 1.8117	* 1.4468	* 1.8769	* 1.5061	* 1.6486	* 1.8679	* 0.9291 *
	* 2.2575	* 1.7824	* 2.1957	* 1.7104	* 2.0839	* 1.8540	* 1.6612	* 2.9834 *
10	* 1.8527	* 1.4443	* 1.5484	* 1.6465	* 1.9097	* 1.6200	* 1.8582	* 0.8597 *
	* 1.7441	* 2.2008	* 2.0276	* 1.9164	* 1.6590	* 1.8950	* 1.6859	* 3.2354 *
11	* 1.4804	* 1.8725	* 1.6423	* 1.8970	* 1.6662	* 1.9044	* 1.8080	* 0.8043 *
	* 2.1277	* 1.7143	* 1.9208	* 1.6683	* 1.8434	* 1.6450	* 1.7211	* 3.5020 *
12	* 1.8727	* 1.5046	* 1.9075	* 1.6654	* 1.5422	* 1.8023	* 1.0717	*
	* 1.7007	* 2.0862	* 1.6608	* 1.8445	* 1.9791	* 1.7191	* 2.6006	*
13	* 1.4652	* 1.6479	* 1.6189	* 1.9034	* 1.8013	* 1.1312	* 0.6163	*
	* 2.0762	* 1.8546	* 1.8964	* 1.6459	* 1.7200	* 2.7152	* 4.5229	*
14	* 1.8436	* 1.8672	* 1.8573	* 1.8069	* 1.0710	* 0.6004	*	*
	* 1.6701	* 1.6616	* 1.6867	* 1.7221	* 2.6021	* 4.5981	*	*
15	* 0.8917	* 0.9290	* 0.8593	* 0.8038	* F-SUB-Q			
	* 3.0812	* 2.9837	* 3.2369	* 3.5044	* M-SUB-Q			

AT 75% POWER, 250 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3159	* 1.4156	* 1.8605	* 1.4790	* 1.8755	* 1.4620	* 1.8460	* 0.8887 *
	* 2.5258	* 2.3001	* 1.7806	* 2.1918	* 1.7655	* 2.2183	* 1.7928	* 3.3190 *
9	* 1.4156	* 1.8230	* 1.4484	* 1.8839	* 1.5058	* 1.6472	* 1.8727	* 0.9272 *
	* 2.3001	* 1.8189	* 2.2429	* 1.7606	* 2.1567	* 1.9738	* 1.7730	* 3.2093 *
10	* 1.8605	* 1.4460	* 1.5502	* 1.6507	* 1.9220	* 1.6234	* 1.8650	* 0.8585 *
	* 1.7806	* 2.2475	* 2.0908	* 1.9817	* 1.7294	* 1.9925	* 1.7813	* 3.4543 *
11	* 1.4790	* 1.8792	* 1.6465	* 1.9120	* 1.6752	* 1.9188	* 1.8213	* 0.8055 *
	* 2.1918	* 1.7649	* 1.9863	* 1.7399	* 1.9288	* 1.7343	* 1.8262	* 3.7291 *
12	* 1.8755	* 1.5043	* 1.9198	* 1.6744	* 1.5545	* 1.8240	* 1.0798	*
	* 1.7655	* 2.1592	* 1.7314	* 1.9300	* 2.0959	* 1.8252	* 2.7673	*
13	* 1.4620	* 1.6464	* 1.6220	* 1.9178	* 1.8230	* 1.1444	* 0.6224	*
	* 2.2183	* 1.9746	* 1.9942	* 1.7352	* 1.8262	* 2.8874	* 4.8114	*
14	* 1.8460	* 1.8719	* 1.8641	* 1.8202	* 1.0792	* 0.6058	*	*
	* 1.7928	* 1.7738	* 1.7821	* 1.8273	* 2.7689	* 4.8954	*	*
15	* 0.8887	* 0.9271	* 0.8581	* 0.8049	* F-SUB-Q			
	* 3.3190	* 3.2097	* 3.4561	* 3.7317	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 116 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 250 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3118	* 1.4060	* 1.8410	* 1.4644	* 1.8523	* 1.4463	* 1.8239	* 0.8894 *
	* 2.5033	* 2.2893	* 1.7778	* 2.1843	* 1.7637	* 2.2081	* 1.7905	* 3.2951 *
9	* 1.4060	* 1.8056	* 1.4361	* 1.8630	* 1.4922	* 1.6300	* 1.8515	* 0.9280 *
	* 2.2893	* 1.8164	* 2.2349	* 1.7595	* 2.1505	* 1.9671	* 1.7714	* 3.1782 *
10	* 1.8410	* 1.4340	* 1.5362	* 1.6377	* 1.9034	* 1.6083	* 1.8452	* 0.8632 *
	* 1.7778	* 2.2388	* 2.0864	* 1.9755	* 1.7295	* 1.9912	* 1.7803	* 3.3925 *
11	* 1.4644	* 1.8581	* 1.6337	* 1.8974	* 1.6641	* 1.9026	* 1.8062	* 0.8079 *
	* 2.1843	* 1.7638	* 1.9799	* 1.7383	* 1.9251	* 1.7346	* 1.8255	* 3.6783 *
12	* 1.8523	* 1.4907	* 1.9012	* 1.6633	* 1.5449	* 1.8123	* 1.0899	*
	* 1.7637	* 2.1530	* 1.7315	* 1.9262	* 2.0954	* 1.8297	* 2.7227	*
13	* 1.4463	* 1.6293	* 1.6068	* 1.9016	* 1.8113	* 1.1500	* 0.6281	*
	* 2.2081	* 1.9680	* 1.9928	* 1.7356	* 1.8307	* 2.8719	* 4.7826	*
14	* 1.8239	* 1.8507	* 1.8443	* 1.8050	* 1.0893	* 0.6116	*	
	* 1.7905	* 1.7721	* 1.7813	* 1.8266	* 2.7239	* 4.8638	*	
15	* 0.8894	* 0.9279	* 0.8627	* 0.8073	* F-SUB-Q			
	* 3.2951	* 3.1786	* 3.3943	* 3.6810	* M-SUB-Q			

AT 75% POWER, 250 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3105	* 1.4093	* 1.8615	* 1.4669	* 1.8700	* 1.4491	* 1.8447	* 0.8768 *
	* 2.4270	* 2.2117	* 1.7095	* 2.1167	* 1.7004	* 2.1383	* 1.7197	* 3.2171 *
9	* 1.4093	* 1.8272	* 1.4398	* 1.8848	* 1.4931	* 1.6373	* 1.8734	* 0.9151 *
	* 2.2117	* 1.7468	* 2.1615	* 1.6954	* 2.0922	* 1.9078	* 1.7090	* 3.1093 *
10	* 1.8615	* 1.4373	* 1.5393	* 1.6452	* 1.9279	* 1.6139	* 1.8675	* 0.8489 *
	* 1.7095	* 2.1658	* 2.0273	* 1.9193	* 1.6757	* 1.9403	* 1.7212	* 3.3374 *
11	* 1.4669	* 1.8798	* 1.6409	* 1.9204	* 1.6716	* 1.9253	* 1.8308	* 0.7972 *
	* 2.1167	* 1.6994	* 1.9238	* 1.6892	* 1.8828	* 1.6887	* 1.7707	* 3.6051 *
12	* 1.8700	* 1.4917	* 1.9256	* 1.6708	* 1.5520	* 1.8375	* 1.0774	*
	* 1.7004	* 2.0945	* 1.6778	* 1.8838	* 2.0499	* 1.7744	* 2.6872	*
13	* 1.4491	* 1.6365	* 1.6125	* 1.9243	* 1.8365	* 1.1458	* 0.6199	*
	* 2.1383	* 1.9087	* 1.9418	* 1.6895	* 1.7753	* 2.8082	* 4.6672	*
14	* 1.8447	* 1.8727	* 1.8666	* 1.8297	* 1.0769	* 0.6025	*	
	* 1.7197	* 1.7095	* 1.7220	* 1.7717	* 2.6884	* 4.7549	*	
15	* 0.8768	* 0.9149	* 0.8484	* 0.7965	* F-SUB-Q			
	* 3.2171	* 3.1097	* 3.3390	* 3.6077	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 117 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 250 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3040 *	* 1.4031 *	* 1.8601 *	* 1.4592 *	* 1.8664 *	* 1.4420 *	* 1.8442 *	* 0.8685 *
	* 2.2341 *	* 2.0369 *	* 1.5698 *	* 1.9495 *	* 1.5632 *	* 1.9716 *	* 1.5826 *	* 2.9725 *
9	* 1.4031 *	* 1.8263 *	* 1.4330 *	* 1.8832 *	* 1.4843 *	* 1.6315 *	* 1.8733 *	* 0.9055 *
	* 2.0369 *	* 1.6020 *	* 1.9890 *	* 1.5593 *	* 1.9323 *	* 1.7569 *	* 1.5711 *	* 2.8743 *
10	* 1.8601 *	* 1.4305 *	* 1.5306 *	* 1.6395 *	* 1.9276 *	* 1.6063 *	* 1.8677 *	* 0.8408 *
	* 1.5698 *	* 1.9930 *	* 1.8713 *	* 1.7709 *	* 1.5403 *	* 1.7936 *	* 1.5834 *	* 3.0809 *
11	* 1.4592 *	* 1.8781 *	* 1.6351 *	* 1.9197 *	* 1.6654 *	* 1.9252 *	* 1.8332 *	* 0.7885 *
	* 1.9495 *	* 1.5628 *	* 1.7751 *	* 1.5489 *	* 1.7318 *	* 1.5479 *	* 1.6199 *	* 3.3454 *
12	* 1.8664 *	* 1.4828 *	* 1.9253 *	* 1.6647 *	* 1.5457 *	* 1.8393 *	* 1.0700 *	
	* 1.5632 *	* 1.9343 *	* 1.5420 *	* 1.7327 *	* 1.8857 *	* 1.6244 *	* 2.4773 *	
13	* 1.4420 *	* 1.6307 *	* 1.6048 *	* 1.9241 *	* 1.8383 *	* 1.1401 *	* 0.6143 *	
	* 1.9716 *	* 1.7576 *	* 1.7950 *	* 1.5487 *	* 1.6252 *	* 2.5871 *	* 4.3171 *	
14	* 1.8442 *	* 1.8725 *	* 1.8668 *	* 1.8320 *	* 1.0697 *	* 0.5965 *		
	* 1.5826 *	* 1.5715 *	* 1.5841 *	* 1.6208 *	* 2.4779 *	* 4.4024 *		
15	* 0.8685 *	* 0.9053 *	* 0.8404 *	* 0.7879 *	* F-SUB-Q			
	* 2.9725 *	* 2.8747 *	* 3.0825 *	* 3.3478 *	* M-SUB-Q			

AT 75% POWER, 250 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2925 *	* 1.3907 *	* 1.8458 *	* 1.4449 *	* 1.8507 *	* 1.4286 *	* 1.8311 *	* 0.8613 *
	* 2.0629 *	* 1.8786 *	* 1.4480 *	* 1.8039 *	* 1.4439 *	* 1.8262 *	* 1.4622 *	* 2.7535 *
9	* 1.3907 *	* 1.8130 *	* 1.4197 *	* 1.8680 *	* 1.4695 *	* 1.6184 *	* 1.8604 *	* 0.9005 *
	* 1.8786 *	* 1.4758 *	* 1.8385 *	* 1.4402 *	* 1.7883 *	* 1.6235 *	* 1.4490 *	* 2.6539 *
10	* 1.8458 *	* 1.4171 *	* 1.5160 *	* 1.6256 *	* 1.9127 *	* 1.5908 *	* 1.8549 *	* 0.8351 *
	* 1.4480 *	* 1.8422 *	* 1.7289 *	* 1.6346 *	* 1.4226 *	* 1.6569 *	* 1.4593 *	* 2.8432 *
11	* 1.4449 *	* 1.8629 *	* 1.6214 *	* 1.9060 *	* 1.6509 *	* 1.9119 *	* 1.8216 *	* 0.7850 *
	* 1.8039 *	* 1.4438 *	* 1.6385 *	* 1.4320 *	* 1.6037 *	* 1.4302 *	* 1.4941 *	* 3.0749 *
12	* 1.8507 *	* 1.4680 *	* 1.9104 *	* 1.6503 *	* 1.5318 *	* 1.8273 *	* 1.0650 *	
	* 1.4439 *	* 1.7901 *	* 1.4244 *	* 1.6044 *	* 1.7510 *	* 1.5046 *	* 2.2871 *	
13	* 1.4286 *	* 1.6175 *	* 1.5893 *	* 1.9109 *	* 1.8263 *	* 1.1331 *	* 0.6103 *	
	* 1.8262 *	* 1.6242 *	* 1.6582 *	* 1.4308 *	* 1.5054 *	* 2.3997 *	* 4.0050 *	
14	* 1.8311 *	* 1.8596 *	* 1.8540 *	* 1.8205 *	* 1.0645 *	* 0.5924 *		
	* 1.4622 *	* 1.4498 *	* 1.4599 *	* 1.4949 *	* 2.2879 *	* 4.0850 *		
15	* 0.8613 *	* 0.9004 *	* 0.8347 *	* 0.7844 *	* F-SUB-Q			
	* 2.7535 *	* 2.6543 *	* 2.8446 *	* 3.0771 *	* M-SUB-Q			

CNEI-0400-355
Appendix A, Rev. 0
Page 118 of 312

F-SUB-O & M-SUB-O VALUES (F-SUB-O OP MARGIN) - NORMAL OPERATION

	H	G	F	E	D	C	B	A
8	1.2795	1.3707	1.8131	1.4222	1.8172	1.4082	1.8000	0.8578
	2.0706	1.9007	1.4688	1.8289	1.4671	1.8515	1.4852	2.7675
9	1.3707	1.7808	1.3981	1.8331	1.4508	1.5947	1.8297	0.8968
	1.9007	1.4974	1.8616	1.4630	1.8105	1.6447	1.4685	2.6644
10	1.8131	1.3960	1.4928	1.6014	1.8775	1.5650	1.8242	0.8344
	1.4688	1.8648	1.7530	1.6554	1.4445	1.6788	1.4781	2.8391
11	1.4222	1.8280	1.5971	1.8724	1.6258	1.8808	1.7922	0.7814
	1.8289	1.4666	1.6591	1.4508	1.6207	1.4454	1.5106	3.0819
12	1.8172	1.4484	1.8752	1.6252	1.5080	1.7969	1.0640	
	1.4671	1.8131	1.4461	1.6214	1.7641	1.5158	2.2731	
13	1.4082	1.5938	1.5634	1.8798	1.7959	1.1252	0.6082	
	1.8515	1.6455	1.6803	1.4461	1.5166	2.3917	3.9859	
14	1.8000	1.8288	1.8233	1.7910	1.0633	0.5907		
	1.4852	1.4691	1.4788	1.5114	2.2742	4.0638		
15	0.8578	0.8966	0.8339	0.7807	F-SUB-Q			
	2.7675	2.6648	2.8406	3.0841	M-SUB-Q			

	H	G	F	E	D	C	B	A
8	* 1.2657	* 1.3615	* 1.8178	* 1.4132	* 1.8215	* 1.4016	* 1.8093	* 0.8378
	* 1.9431	* 1.7790	* 1.3641	* 1.7166	* 1.3648	* 1.7362	* 1.3784	* 2.6443
9	* 1.3615	* 1.7865	* 1.3892	* 1.8385	* 1.4358	* 1.5924	* 1.8394	* 0.8752
	* 1.7790	* 1.3875	* 1.7452	* 1.3589	* 1.7005	* 1.5365	* 1.3611	* 2.5500
10	* 1.8178	* 1.3866	* 1.4830	* 1.5948	* 1.8841	* 1.5589	* 1.8337	* 0.8125
	* 1.3641	* 1.7488	* 1.6420	* 1.5469	* 1.3390	* 1.5690	* 1.3683	* 2.7193
11	* 1.4132	* 1.8332	* 1.5905	* 1.8765	* 1.6184	* 1.8884	* 1.8023	* 0.7618
	* 1.7166	* 1.3625	* 1.5508	* 1.3470	* 1.5149	* 1.3384	* 1.3961	* 2.9414
12	* 1.8215	* 1.4344	* 1.8817	* 1.6178	* 1.5016	* 1.8053	* 1.0392	*
	* 1.3648	* 1.7023	* 1.3406	* 1.5156	* 1.6434	* 1.4012	* 2.1651	*
13	* 1.4016	* 1.5914	* 1.5573	* 1.8874	* 1.8043	* 1.1080	* 0.5924	*
	* 1.7362	* 1.5372	* 1.5704	* 1.3390	* 1.4020	* 2.2548	* 3.8081	*
14	* 1.8093	* 1.8385	* 1.8327	* 1.8011	* 1.0390	* 0.5742	*	
	* 1.3784	* 1.3616	* 1.3690	* 1.3969	* 2.1654	* 3.8901	*	
15	* 0.8378	* 0.8750	* 0.8120	* 0.7611	* F-SUB-Q			
	* 2.6443	* 2.5504	* 2.7208	* 2.9437	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 119 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 250 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2427 *	* 1.3355 *	* 1.7845 *	* 1.3858 *	* 1.7891 *	* 1.3779 *	* 1.7808 *	* 0.8209 *
	* 1.8575 *	* 1.7062 *	* 1.3074 *	* 1.6494 *	* 1.3084 *	* 1.6645 *	* 1.3188 *	* 2.5461 *
9	* 1.3355 *	* 1.7547 *	* 1.3623 *	* 1.8040 *	* 1.4079 *	* 1.5675 *	* 1.8113 *	* 0.8579 *
	* 1.7062 *	* 1.3279 *	* 1.6758 *	* 1.3032 *	* 1.6329 *	* 1.4700 *	* 1.3005 *	* 2.4539 *
10	* 1.7845 *	* 1.3597 *	* 1.4557 *	* 1.5661 *	* 1.8495 *	* 1.5313 *	* 1.8055 *	* 0.7964 *
	* 1.3074 *	* 1.6793 *	* 1.5745 *	* 1.4820 *	* 1.2816 *	* 1.5019 *	* 1.3065 *	* 2.6145 *
11	* 1.3858 *	* 1.7987 *	* 1.5617 *	* 1.8422 *	* 1.5890 *	* 1.8590 *	* 1.7744 *	* 0.7464 *
	* 1.6494 *	* 1.3068 *	* 1.4858 *	* 1.2882 *	* 1.4487 *	* 1.2755 *	* 1.3306 *	* 2.8252 *
12	* 1.7891 *	* 1.4065 *	* 1.8472 *	* 1.5885 *	* 1.4751 *	* 1.7761 *	* 1.0199 *	
	* 1.3084 *	* 1.6346 *	* 1.2832 *	* 1.4493 *	* 1.5664 *	* 1.3340 *	* 2.0688 *	
13	* 1.3779 *	* 1.5666 *	* 1.5296 *	* 1.8579 *	* 1.7751 *	* 1.0872 *	* 0.5797 *	
	* 1.6645 *	* 1.4708 *	* 1.5034 *	* 1.2761 *	* 1.3347 *	* 2.1538 *	* 3.6527 *	
14	* 1.7808 *	* 1.8103 *	* 1.8044 *	* 1.7732 *	* 1.0197 *	* 0.5617 *		
	* 1.3188 *	* 1.3011 *	* 1.3072 *	* 1.3314 *	* 2.0691 *	* 3.7328 *		
15	* 0.8209 *	* 0.8577 *	* 0.7959 *	* 0.7457 *	F-SUB-Q			
	* 2.5461 *	* 2.4543 *	* 2.6160 *	* 2.8275 *	M-SUB-Q			

AT 75% POWER, 250 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2044 *	* 1.2864 *	* 1.7008 *	* 1.3329 *	* 1.7081 *	* 1.3303 *	* 1.7020 *	* 0.8038 *
	* 1.8243 *	* 1.6839 *	* 1.3032 *	* 1.6311 *	* 1.3027 *	* 1.6401 *	* 1.3116 *	* 2.4782 *
9	* 1.2864 *	* 1.6739 *	* 1.3106 *	* 1.7178 *	* 1.3616 *	* 1.5116 *	* 1.7314 *	* 0.8411 *
	* 1.6839 *	* 1.3223 *	* 1.6566 *	* 1.3004 *	* 1.6079 *	* 1.4493 *	* 1.2924 *	* 2.3835 *
10	* 1.7008 *	* 1.3084 *	* 1.4047 *	* 1.5070 *	* 1.7613 *	* 1.4748 *	* 1.7256 *	* 0.7827 *
	* 1.3032 *	* 1.6598 *	* 1.5521 *	* 1.4637 *	* 1.2775 *	* 1.4801 *	* 1.2979 *	* 2.5323 *
11	* 1.3329 *	* 1.7127 *	* 1.5028 *	* 1.7572 *	* 1.5297 *	* 1.7792 *	* 1.6953 *	* 0.7320 *
	* 1.6311 *	* 1.3041 *	* 1.4673 *	* 1.2814 *	* 1.4283 *	* 1.2637 *	* 1.3209 *	* 2.7402 *
12	* 1.7081 *	* 1.3593 *	* 1.7590 *	* 1.5291 *	* 1.4215 *	* 1.6966 *	* 1.0017 *	
	* 1.3027 *	* 1.6107 *	* 1.2790 *	* 1.4290 *	* 1.5417 *	* 1.3229 *	* 1.9988 *	
13	* 1.3303 *	* 1.5107 *	* 1.4732 *	* 1.7781 *	* 1.6956 *	* 1.0575 *	* 0.5681 *	
	* 1.6401 *	* 1.4501 *	* 1.4816 *	* 1.2644 *	* 1.3236 *	* 2.0997 *	* 3.5406 *	
14	* 1.7020 *	* 1.7305 *	* 1.7246 *	* 1.6941 *	* 1.0011 *	* 0.5512 *		
	* 1.3116 *	* 1.2930 *	* 1.2986 *	* 1.3217 *	* 1.9999 *	* 3.6132 *		
15	* 0.8038 *	* 0.8410 *	* 0.7822 *	* 0.7313 *	F-SUB-Q			
	* 2.4782 *	* 2.3839 *	* 2.5338 *	* 2.7424 *	M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 120 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 250 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1530	* 1.2313	* 1.6254	* 1.2769	* 1.6368	* 1.2792	* 1.6327	* 0.7575
	* 1.8271	* 1.6882	* 1.3076	* 1.6339	* 1.3037	* 1.6375	* 1.3114	* 2.5263
9	* 1.2313	* 1.6026	* 1.2559	* 1.6420	* 1.2995	* 1.4552	* 1.6615	* 0.7929
	* 1.6882	* 1.3243	* 1.6589	* 1.3043	* 1.6134	* 1.4443	* 1.2912	* 2.4304
10	* 1.6254	* 1.2535	* 1.3516	* 1.4468	* 1.6833	* 1.4194	* 1.6554	* 0.7360
	* 1.3076	* 1.6625	* 1.5468	* 1.4614	* 1.2807	* 1.4743	* 1.2968	* 2.5875
11	* 1.2769	* 1.6372	* 1.4425	* 1.6784	* 1.4678	* 1.7071	* 1.6240	* 0.6895
	* 1.6339	* 1.3080	* 1.4653	* 1.2853	* 1.4265	* 1.2613	* 1.3210	* 2.7946
12	* 1.6368	* 1.2982	* 1.6811	* 1.4673	* 1.3677	* 1.6252	* 0.9430	
	* 1.3037	* 1.6152	* 1.2823	* 1.4271	* 1.5356	* 1.3223	* 2.0360	
13	* 1.2792	* 1.4543	* 1.4178	* 1.7060	* 1.6242	* 1.0011	* 0.5348	
	* 1.6375	* 1.4451	* 1.4758	* 1.2620	* 1.3231	* 2.1265	* 3.6125	
14	* 1.6327	* 1.6606	* 1.6543	* 1.6228	* 0.9422	* 0.5181	*	
	* 1.3114	* 1.2918	* 1.2976	* 1.3219	* 2.0375	* 3.6923	*	
15	* 0.7575	* 0.7927	* 0.7356	* 0.6888	* F-SUB-Q			
	* 2.5263	* 2.4308	* 2.5890	* 2.7970	* M-SUB-Q			

AT 75% POWER, 250 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0540	* 1.1242	* 1.4573	* 1.1650	* 1.4691	* 1.1689	* 1.4624	* 0.6918
	* 1.9358	* 1.7897	* 1.4102	* 1.7328	* 1.4048	* 1.7346	* 1.4164	* 2.6831
9	* 1.1242	* 1.4353	* 1.1473	* 1.4741	* 1.1894	* 1.3237	* 1.4880	* 0.7216
	* 1.7897	* 1.4300	* 1.7573	* 1.4044	* 1.7051	* 1.5364	* 1.3944	* 2.5900
10	* 1.4573	* 1.1452	* 1.2372	* 1.3221	* 1.5105	* 1.2974	* 1.4815	* 0.6707
	* 1.4102	* 1.7609	* 1.6349	* 1.5461	* 1.3789	* 1.5601	* 1.4012	* 2.7535
11	* 1.1650	* 1.4698	* 1.3182	* 1.5066	* 1.3408	* 1.5300	* 1.4498	* 0.6258
	* 1.7328	* 1.4084	* 1.5502	* 1.3832	* 1.5097	* 1.3597	* 1.4309	* 2.9862
12	* 1.4691	* 1.1883	* 1.5086	* 1.3404	* 1.2479	* 1.4528	* 0.8594	
	* 1.4048	* 1.7069	* 1.3805	* 1.5103	* 1.6279	* 1.4298	* 2.1631	
13	* 1.1689	* 1.3228	* 1.2960	* 1.5290	* 1.4519	* 0.9056	* 0.4877	
	* 1.7346	* 1.5372	* 1.5617	* 1.3604	* 1.4306	* 2.2762	* 3.8426	
14	* 1.4624	* 1.4872	* 1.4806	* 1.4487	* 0.8582	* 0.4725	*	
	* 1.4164	* 1.3951	* 1.4020	* 1.4319	* 2.1660	* 3.9281	*	
15	* 0.6918	* 0.7215	* 0.6703	* 0.6252	* F-SUB-Q			
	* 2.6831	* 2.5904	* 2.7551	* 2.9888	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 121 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 250 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.8462	* 0.9102	* 1.1950	* 0.9404	* 1.1959	* 0.9369	* 1.1783	* 0.5618
	* 2.3527	* 2.1547	* 1.6756	* 2.0918	* 1.6812	* 2.1095	* 1.7143	* 3.2293
9	* 0.9102	* 1.1873	* 0.9295	* 1.2311	* 0.9671	* 1.0556	* 1.1953	* 0.5844
	* 2.1547	* 1.6843	* 2.1141	* 1.6374	* 2.0427	* 1.8780	* 1.6922	* 3.1250
10	* 1.1950	* 0.9279	* 0.9981	* 1.0731	* 1.2575	* 1.0473	* 1.1887	* 0.5413
	* 1.6756	* 2.1182	* 1.9745	* 1.8552	* 1.6109	* 1.8833	* 1.7026	* 3.3339
11	* 0.9404	* 1.2281	* 1.0702	* 1.2523	* 1.0840	* 1.2231	* 1.1526	* 0.5036
	* 2.0918	* 1.6412	* 1.8597	* 1.6189	* 1.8176	* 1.6560	* 1.7552	* 3.6275
12	* 1.1959	* 0.9662	* 1.2562	* 1.0837	* 0.9828	* 1.1677	* 0.6973	*
	* 1.6812	* 2.0448	* 1.6127	* 1.8183	* 2.0139	* 1.7339	* 2.6028	*
13	* 0.9369	* 1.0549	* 1.0463	* 1.2225	* 1.1671	* 0.7183	* 0.3969	*
	* 2.1095	* 1.8789	* 1.8851	* 1.6568	* 1.7348	* 2.8017	* 4.6185	*
14	* 1.1783	* 1.1947	* 1.1880	* 1.1518	* 0.6962	* 0.3846	*	*
	* 1.7143	* 1.6929	* 1.7034	* 1.7563	* 2.6067	* 4.7195	*	*
15	* 0.5618	* 0.5843	* 0.5409	* 0.5031	* F-SUB-Q			
	* 3.2293	* 3.1254	* 3.3361	* 3.6305	* M-SUB-Q			

AT 75% POWER, 250 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.3743	* 0.4024	* 0.4863	* 0.4169	* 0.4861	* 0.3996	* 0.4468	* 0.2390
	* 5.2101	* 4.7717	* 4.0248	* 4.6158	* 4.0463	* 4.8329	* 4.4218	* 7.4427
9	* 0.4024	* 0.4708	* 0.4116	* 0.4979	* 0.4298	* 0.4231	* 0.4517	* 0.2458
	* 4.7717	* 4.1532	* 4.6727	* 3.9565	* 4.4947	* 4.5786	* 4.3786	* 7.2865
10	* 0.4863	* 0.4109	* 0.4140	* 0.4566	* 0.5084	* 0.4299	* 0.4486	* 0.2317
	* 4.0248	* 4.6812	* 4.6523	* 4.2599	* 3.8910	* 4.4815	* 4.4113	* 7.6388
11	* 0.4169	* 0.4968	* 0.4555	* 0.5063	* 0.4468	* 0.4895	* 0.4306	* 0.2111
	* 4.6158	* 3.9649	* 4.2695	* 3.9098	* 4.3043	* 4.0453	* 4.5977	* 8.4880
12	* 0.4861	* 0.4294	* 0.5078	* 0.4466	* 0.3973	* 0.4417	* 0.2958	*
	* 4.0463	* 4.4996	* 3.8953	* 4.3064	* 4.8682	* 4.4840	* 6.0135	*
13	* 0.3996	* 0.4229	* 0.4295	* 0.4892	* 0.4415	* 0.3123	* 0.1697	*
	* 4.8329	* 4.5807	* 4.4853	* 4.0475	* 4.4864	* 6.3134	* 10.6060	*
14	* 0.4468	* 0.4515	* 0.4483	* 0.4302	* 0.2953	* 0.1669	*	*
	* 4.4218	* 4.3805	* 4.4137	* 4.6009	* 6.0227	* 10.6762	*	*
15	* 0.2390	* 0.2457	* 0.2316	* 0.2109	* F-SUB-Q			
	* 7.4427	* 7.2874	* 7.6426	* 8.4948	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 122 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 350 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.3604	* 0.4637	* 0.5807	* 0.5285	* 0.6029	* 0.5125	* 0.5500	* 0.3148
	* 4.5301	* 4.4794	* 3.7256	* 3.9125	* 3.5816	* 4.0637	* 3.9892	* 6.0703
9	* 0.4637	* 0.5446	* 0.5076	* 0.6001	* 0.5383	* 0.5268	* 0.5507	* 0.3225
	* 4.4794	* 4.0184	* 4.1153	* 3.6059	* 3.8425	* 3.9592	* 3.9819	* 6.0778
10	* 0.5807	* 0.5070	* 0.5122	* 0.5507	* 0.5933	* 0.5195	* 0.5316	* 0.2962
	* 3.7256	* 4.1217	* 4.0970	* 3.7990	* 3.6349	* 3.9276	* 4.0402	* 6.3457
11	* 0.5285	* 0.5994	* 0.5497	* 0.5701	* 0.4959	* 0.5295	* 0.4842	* 0.2629
	* 3.9125	* 3.6086	* 3.8044	* 3.8264	* 4.0433	* 3.9965	* 4.3977	* 7.2382
12	* 0.6029	* 0.5380	* 0.5927	* 0.4956	* 0.3655	* 0.4141	* 0.3171	*
	* 3.5816	* 3.8456	* 3.6378	* 4.0452	* 4.3422	* 4.2970	* 5.5551	*
13	* 0.5125	* 0.5267	* 0.5192	* 0.5293	* 0.4139	* 0.2703	* 0.1802	*
	* 4.0637	* 3.9603	* 3.9295	* 3.9980	* 4.2989	* 5.6542	* 9.0518	*
14	* 0.5500	* 0.5506	* 0.5314	* 0.4840	* 0.3168	* 0.1755	*	*
	* 3.9892	* 3.9828	* 4.0414	* 4.3996	* 5.5588	* 9.0597	*	*
15	* 0.3148	* 0.3225	* 0.2961	* 0.2628	* F-SUB-Q			
	* 6.0703	* 6.0783	* 6.3469	* 7.2418	* M-SUB-Q			

AT 75% POWER, 350 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.7258	* 0.9419	* 1.2361	* 1.0691	* 1.2823	* 1.0652	* 1.2529	* 0.6822
	* 2.3973	* 2.2648	* 1.7959	* 1.9885	* 1.7316	* 2.0026	* 1.8000	* 2.8799
9	* 0.9419	* 1.1847	* 1.0286	* 1.2906	* 1.0863	* 1.1571	* 1.2554	* 0.6982
	* 2.2648	* 1.8811	* 2.0772	* 1.7231	* 1.9570	* 1.8484	* 1.7822	* 2.8712
10	* 1.2361	* 1.0272	* 1.0960	* 1.1427	* 1.2721	* 1.1248	* 1.2161	* 0.6377
	* 1.7959	* 2.0807	* 1.9652	* 1.8742	* 1.7419	* 1.8674	* 1.8134	* 3.0198
11	* 1.0691	* 1.2889	* 1.1406	* 1.2215	* 1.0666	* 1.1485	* 1.1103	* 0.5768
	* 1.9885	* 1.7253	* 1.8770	* 1.8184	* 1.9030	* 1.8711	* 1.9660	* 3.3939
12	* 1.2823	* 1.0856	* 1.2710	* 1.0660	* 0.7923	* 0.9514	* 0.6829	*
	* 1.7316	* 1.9585	* 1.7433	* 1.9039	* 2.0261	* 1.9129	* 2.6277	*
13	* 1.0652	* 1.1568	* 1.1244	* 1.1480	* 0.9508	* 0.5629	* 0.3906	*
	* 2.0026	* 1.8487	* 1.8681	* 1.8718	* 1.9137	* 2.7842	* 4.2617	*
14	* 1.2529	* 1.2553	* 1.2157	* 1.1098	* 0.6822	* 0.3801	*	*
	* 1.8000	* 1.7824	* 1.8139	* 1.9668	* 2.6296	* 4.2689	*	*
15	* 0.6822	* 0.6982	* 0.6376	* 0.5765	* F-SUB-Q			
	* 2.8799	* 2.8715	* 3.0203	* 3.3954	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 123 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 350 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.8917	* 1.1285	* 1.4824	* 1.2798	* 1.5386	* 1.2743	* 1.5047	* 0.8260
	* 2.0759	* 1.9285	* 1.5244	* 1.6924	* 1.4688	* 1.7004	* 1.5033	* 2.3881
9	* 1.1285	* 1.4017	* 1.2287	* 1.5168	* 1.2928	* 1.3950	* 1.5092	* 0.8519
	* 1.9285	* 1.6149	* 1.7679	* 1.4918	* 1.6750	* 1.5520	* 1.4957	* 2.3729
10	* 1.4824	* 1.2269	* 1.3073	* 1.3596	* 1.4903	* 1.3481	* 1.4665	* 0.7815
	* 1.5244	* 1.7712	* 1.6562	* 1.6010	* 1.5141	* 1.5870	* 1.5282	* 2.5023
11	* 1.2798	* 1.5145	* 1.3571	* 1.4292	* 1.2799	* 1.3901	* 1.3467	* 0.7064
	* 1.6924	* 1.4939	* 1.6036	* 1.5687	* 1.6143	* 1.5698	* 1.6509	* 2.8231
12	* 1.5386	* 1.2919	* 1.4889	* 1.2792	* 0.9757	* 1.1578	* 0.8323	
	* 1.4688	* 1.6763	* 1.5155	* 1.6151	* 1.7001	* 1.6155	* 2.1928	
13	* 1.2743	* 1.3947	* 1.3476	* 1.3895	* 1.1571	* 0.7034	* 0.4732	
	* 1.7004	* 1.5522	* 1.5875	* 1.5704	* 1.6162	* 2.2974	* 3.5883	
14	* 1.5047	* 1.5090	* 1.4661	* 1.3461	* 0.8317	* 0.4636		
	* 1.5033	* 1.4959	* 1.5286	* 1.6516	* 2.1936	* 3.5711		
15	* 0.8260	* 0.8519	* 0.7813	* 0.7061	* F-SUB-Q			
	* 2.3881	* 2.3730	* 2.5027	* 2.8242	* M-SUB-Q			

AT 75% POWER, 350 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9716	* 1.2303	* 1.6594	* 1.3941	* 1.7168	* 1.3804	* 1.6857	* 0.8855
	* 1.9602	* 1.8076	* 1.3888	* 1.5843	* 1.3420	* 1.5967	* 1.3611	* 2.2587
9	* 1.2303	* 1.5688	* 1.3379	* 1.7006	* 1.4041	* 1.5266	* 1.6910	* 0.9138
	* 1.8076	* 1.4714	* 1.6559	* 1.3562	* 1.5724	* 1.4416	* 1.3554	* 2.2449
10	* 1.6594	* 1.3358	* 1.4199	* 1.4857	* 1.6728	* 1.4697	* 1.6448	* 0.8333
	* 1.3888	* 1.6592	* 1.5524	* 1.4939	* 1.3757	* 1.4836	* 1.3873	* 2.3885
11	* 1.3941	* 1.6981	* 1.4829	* 1.6029	* 1.4009	* 1.5579	* 1.5145	* 0.7576
	* 1.5843	* 1.3583	* 1.4964	* 1.4242	* 1.5033	* 1.4275	* 1.4925	* 2.6820
12	* 1.7168	* 1.4032	* 1.6712	* 1.4001	* 1.0648	* 1.3008	* 0.8923	
	* 1.3420	* 1.5736	* 1.3771	* 1.5041	* 1.5915	* 1.4680	* 2.0889	
13	* 1.3804	* 1.5263	* 1.4692	* 1.5573	* 1.3001	* 0.7728	* 0.5049	
	* 1.5967	* 1.4418	* 1.4840	* 1.4280	* 1.4686	* 2.1562	* 3.4469	
14	* 1.6857	* 1.6908	* 1.6444	* 1.5139	* 0.8914	* 0.4948		
	* 1.3611	* 1.3556	* 1.3876	* 1.4931	* 2.0903	* 3.4288		
15	* 0.8855	* 0.9138	* 0.8331	* 0.7572	* F-SUB-Q			
	* 2.2587	* 2.2450	* 2.3889	* 2.6831	* M-SUB-Q			

CNEI-0400-355
Appendix A, Rev. 0
Page 124 of 312

F-SUB-O & M-SUB-O VALUES (F-SUB-O OP MARGIN) - NORMAL OPERATION

	H	G	F	E	D	C	B	A
8	* 1.0020	* 1.2650	* 1.7250	* 1.4299	* 1.7764	* 1.4092	* 1.7470	* 0.9076
	* 1.9658	* 1.8025	* 1.3668	* 1.5778	* 1.3242	* 1.5976	* 1.3413	* 2.2519
9	* 1.2650	* 1.6289	* 1.3753	* 1.7706	* 1.4399	* 1.5639	* 1.7526	* 0.9398
	* 1.8025	* 1.4528	* 1.6489	* 1.3310	* 1.5663	* 1.4387	* 1.3362	* 2.2312
10	* 1.7250	* 1.3731	* 1.4527	* 1.5291	* 1.7442	* 1.5048	* 1.7056	* 0.8568
	* 1.3668	* 1.6522	* 1.5537	* 1.4831	* 1.3467	* 1.4776	* 1.3642	* 2.3733
11	* 1.4299	* 1.7684	* 1.5262	* 1.6711	* 1.4448	* 1.6160	* 1.5759	* 0.7800
	* 1.5778	* 1.3329	* 1.4856	* 1.3956	* 1.4948	* 1.4088	* 1.4643	* 2.6551
12	* 1.7764	* 1.4388	* 1.7425	* 1.4437	* 1.1002	* 1.3562	* 0.9221	*
	* 1.3242	* 1.5676	* 1.3480	* 1.4956	* 1.5920	* 1.4468	* 2.0748	*
13	* 1.4092	* 1.5636	* 1.5045	* 1.6154	* 1.3554	* 0.8030	* 0.5203	*
	* 1.5976	* 1.4389	* 1.4778	* 1.4092	* 1.4474	* 2.1421	* 3.4482	*
14	* 1.7470	* 1.7524	* 1.7052	* 1.5753	* 0.9217	* 0.5098	*	*
	* 1.3413	* 1.3364	* 1.3644	* 1.4649	* 2.0749	* 3.4303	*	*
15	* 0.9076	* 0.9398	* 0.8566	* 0.7797	* F-SUB-Q			
	* 2.2519	* 2.2312	* 2.3737	* 2.6560	* M-SUB-Q			

	H	G	F	E	D	C	B	A
8	* 1.0146	* 1.2738	* 1.7422	* 1.4344	* 1.7873	* 1.4092	* 1.7570	* 0.9120
	* 2.0086	* 1.8401	* 1.3890	* 1.6135	* 1.3488	* 1.6311	* 1.3617	* 2.2894
9	* 1.2738	* 1.6455	* 1.3833	* 1.7897	* 1.4455	* 1.5650	* 1.7630	* 0.9460
	* 1.8401	* 1.4767	* 1.6827	* 1.3503	* 1.6011	* 1.4677	* 1.3560	* 2.2642
10	* 1.7422	* 1.3810	* 1.4560	* 1.5388	* 1.7652	* 1.5074	* 1.7176	* 0.8656
	* 1.3890	* 1.6861	* 1.5903	* 1.5131	* 1.3667	* 1.5146	* 1.3878	* 2.4032
11	* 1.4344	* 1.7871	* 1.5361	* 1.6925	* 1.4634	* 1.6315	* 1.5927	* 0.7873
	* 1.6135	* 1.3524	* 1.5155	* 1.4120	* 1.5231	* 1.4332	* 1.4927	* 2.7064
12	* 1.7873	* 1.4445	* 1.7634	* 1.4624	* 1.1154	* 1.3759	* 0.9371	*
	* 1.3488	* 1.6025	* 1.3680	* 1.5239	* 1.6334	* 1.4760	* 2.1069	*
13	* 1.4092	* 1.5647	* 1.5071	* 1.6309	* 1.3751	* 0.8185	* 0.5294	*
	* 1.6311	* 1.4679	* 1.5149	* 1.4336	* 1.4766	* 2.1883	* 3.5241	*
14	* 1.7570	* 1.7628	* 1.7173	* 1.5921	* 0.9368	* 0.5185	*	
	* 1.3617	* 1.3561	* 1.3880	* 1.4933	* 2.1068	* 3.5072	*	
15	* 0.9120	* 0.9460	* 0.8654	* 0.7870	* F-SUB-Q			
	* 2.2894	* 2.2642	* 2.4036	* 2.7072	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 125 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 350 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0217	* 1.2819	* 1.7620	* 1.4363	* 1.7996	* 1.4071	* 1.7683	* 0.9044
	* 2.0542	* 1.8739	* 1.4261	* 1.6703	* 1.3871	* 1.6855	* 1.3942	* 2.3787
9	* 1.2819	* 1.6676	* 1.3880	* 1.8116	* 1.4479	* 1.5655	* 1.7751	* 0.9386
	* 1.8739	* 1.5159	* 1.7414	* 1.3833	* 1.6584	* 1.5147	* 1.3891	* 2.3524
10	* 1.7620	* 1.3857	* 1.4605	* 1.5481	* 1.7898	* 1.5108	* 1.7330	* 0.8570
	* 1.4261	* 1.7450	* 1.6476	* 1.5625	* 1.4002	* 1.5688	* 1.4248	* 2.5110
11	* 1.4363	* 1.8087	* 1.5454	* 1.7199	* 1.4725	* 1.6534	* 1.6147	* 0.7839
	* 1.6703	* 1.3854	* 1.5650	* 1.4292	* 1.5557	* 1.4579	* 1.5283	* 2.8264
12	* 1.7996	* 1.4469	* 1.7880	* 1.4715	* 1.1251	* 1.4032	* 0.9403	*
	* 1.3871	* 1.6598	* 1.4016	* 1.5565	* 1.6817	* 1.5071	* 2.1793	*
13	* 1.4071	* 1.5652	* 1.5105	* 1.6528	* 1.4024	* 0.8312	* 0.5333	*
	* 1.6855	* 1.5149	* 1.5691	* 1.4583	* 1.5077	* 2.2607	* 3.6631	*
14	* 1.7683	* 1.7750	* 1.7326	* 1.6141	* 0.9401	* 0.5218	*	*
	* 1.3942	* 1.3892	* 1.4250	* 1.5288	* 2.1790	* 3.6498	*	*
15	* 0.9044	* 0.9386	* 0.8568	* 0.7836	* F-SUB-Q			
	* 2.3787	* 2.3525	* 2.5114	* 2.8273	* M-SUB-Q			

AT 75% POWER, 350 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0390	* 1.2909	* 1.7698	* 1.4319	* 1.7979	* 1.3978	* 1.7641	* 0.8963
	* 2.1287	* 1.9431	* 1.4925	* 1.7563	* 1.4532	* 1.7701	* 1.4562	* 2.5003
9	* 1.2909	* 1.6821	* 1.3881	* 1.8184	* 1.4447	* 1.5574	* 1.7719	* 0.9310
	* 1.9431	* 1.5709	* 1.8303	* 1.4455	* 1.7440	* 1.5891	* 1.4513	* 2.4715
10	* 1.7698	* 1.3858	* 1.4602	* 1.5515	* 1.8017	* 1.5086	* 1.7353	* 0.8515
	* 1.4925	* 1.8341	* 1.7344	* 1.6397	* 1.4631	* 1.6507	* 1.4908	* 2.6430
11	* 1.4319	* 1.8155	* 1.5488	* 1.7397	* 1.4844	* 1.6714	* 1.6288	* 0.7822
	* 1.7563	* 1.4477	* 1.6424	* 1.4707	* 1.6085	* 1.5042	* 1.5763	* 2.9793
12	* 1.7979	* 1.4437	* 1.7999	* 1.4835	* 1.1470	* 1.4365	* 0.9519	*
	* 1.4532	* 1.7455	* 1.4646	* 1.6092	* 1.7383	* 1.5517	* 2.2544	*
13	* 1.3978	* 1.5571	* 1.5082	* 1.6709	* 1.4357	* 0.8589	* 0.5447	*
	* 1.7701	* 1.5894	* 1.6511	* 1.5045	* 1.5522	* 2.3418	* 3.7965	*
14	* 1.7641	* 1.7718	* 1.7350	* 1.6282	* 0.9517	* 0.5324	*	*
	* 1.4562	* 1.4515	* 1.4910	* 1.5768	* 2.2540	* 3.7863	*	*
15	* 0.8963	* 0.9310	* 0.8513	* 0.7819	* F-SUB-Q			
	* 2.5003	* 2.4716	* 2.6434	* 2.9802	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 126 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 350 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1024	* 1.3116	* 1.7858	* 1.4308	* 1.8022	* 1.3914	* 1.7647	* 0.8871
	* 2.2309	* 2.0248	* 1.5724	* 1.8607	* 1.5321	* 1.8727	* 1.5315	* 2.6566
9	* 1.3116	* 1.7099	* 1.3922	* 1.8319	* 1.4452	* 1.5534	* 1.7739	* 0.9201
	* 2.0248	* 1.6260	* 1.9389	* 1.5205	* 1.8483	* 1.6792	* 1.5267	* 2.6309
10	* 1.7858	* 1.3899	* 1.4666	* 1.5602	* 1.8223	* 1.5129	* 1.7444	* 0.8428
	* 1.5724	* 1.9430	* 1.8316	* 1.7314	* 1.5204	* 1.7487	* 1.5700	* 2.8192
11	* 1.4308	* 1.8290	* 1.5574	* 1.7740	* 1.5088	* 1.7064	* 1.6534	* 0.7791
	* 1.8607	* 1.5229	* 1.7342	* 1.5274	* 1.6801	* 1.5662	* 1.6362	* 3.1755
12	* 1.8022	* 1.4442	* 1.8205	* 1.5083	* 1.2171	* 1.5064	* 0.9695	*
	* 1.5321	* 1.8498	* 1.5215	* 1.6809	* 1.8197	* 1.6140	* 2.3685	*
13	* 1.3914	* 1.5530	* 1.5125	* 1.7059	* 1.5058	* 0.9236	* 0.5626	*
	* 1.8727	* 1.6795	* 1.7491	* 1.5666	* 1.6146	* 2.4546	* 3.9891	*
14	* 1.7647	* 1.7738	* 1.7441	* 1.6529	* 0.9687	* 0.5493	*	*
	* 1.5315	* 1.5269	* 1.5702	* 1.6367	* 2.3697	* 3.9827	*	*
15	* 0.8871	* 0.9201	* 0.8426	* 0.7788	* F-SUB-Q			
	* 2.6566	* 2.6310	* 2.8196	* 3.1767	* M-SUB-Q			

AT 75% POWER, 350 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1923	* 1.3260	* 1.7717	* 1.4160	* 1.7762	* 1.3716	* 1.7342	* 0.8859
	* 2.3498	* 2.1389	* 1.6848	* 2.0073	* 1.6570	* 2.0168	* 1.6537	* 2.8257
9	* 1.3260	* 1.7096	* 1.3858	* 1.8114	* 1.4370	* 1.5326	* 1.7448	* 0.9211
	* 2.1389	* 1.7246	* 2.0742	* 1.6434	* 1.9824	* 1.8092	* 1.6487	* 2.7882
10	* 1.7717	* 1.3835	* 1.4593	* 1.5547	* 1.8107	* 1.5026	* 1.7234	* 0.8505
	* 1.6848	* 2.0785	* 1.9421	* 1.8334	* 1.6129	* 1.8545	* 1.6951	* 2.9744
11	* 1.4160	* 1.8086	* 1.5519	* 1.7850	* 1.5315	* 1.7176	* 1.6512	* 0.7870
	* 2.0073	* 1.6460	* 1.8364	* 1.6172	* 1.7771	* 1.6630	* 1.7344	* 3.3130
12	* 1.7762	* 1.4355	* 1.8094	* 1.5310	* 1.3308	* 1.5868	* 1.0042	*
	* 1.6570	* 1.9848	* 1.6141	* 1.7778	* 1.9413	* 1.7258	* 2.4671	*
13	* 1.3716	* 1.5322	* 1.5022	* 1.7172	* 1.5863	* 1.0114	* 0.5910	*
	* 2.0168	* 1.8096	* 1.8554	* 1.6633	* 1.7263	* 2.5887	* 4.1792	*
14	* 1.7342	* 1.7447	* 1.7231	* 1.6507	* 1.0040	* 0.5775	*	*
	* 1.6537	* 1.6488	* 1.6953	* 1.7349	* 2.4667	* 4.1700	*	*
15	* 0.8859	* 0.9211	* 0.8503	* 0.7867	* F-SUB-Q			
	* 2.8257	* 2.7883	* 2.9748	* 3.3141	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 127 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 350 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2377	* 1.3513	* 1.8036	* 1.4231	* 1.7967	* 1.3733	* 1.7518	* 0.8731
	* 2.4792	* 2.2520	* 1.7592	* 2.1403	* 1.7549	* 2.1516	* 1.7468	* 3.0516
9	* 1.3513	* 1.7562	* 1.3965	* 1.8425	* 1.4423	* 1.5389	* 1.7637	* 0.9085
	* 2.2520	* 1.7966	* 2.1866	* 1.7135	* 2.0963	* 1.9252	* 1.7419	* 3.0146
10	* 1.8036	* 1.3941	* 1.4735	* 1.5719	* 1.8521	* 1.5158	* 1.7490	* 0.8369
	* 1.7592	* 2.1912	* 2.0449	* 1.9270	* 1.6791	* 1.9501	* 1.7698	* 3.2320
11	* 1.4231	* 1.8396	* 1.5690	* 1.8373	* 1.5689	* 1.7664	* 1.6913	* 0.7816
	* 2.1403	* 1.7165	* 1.9302	* 1.6837	* 1.8648	* 1.7338	* 1.8062	* 3.5407
12	* 1.7967	* 1.4415	* 1.8508	* 1.5685	* 1.4192	* 1.6751	* 1.0141	*
	* 1.7549	* 2.0977	* 1.6802	* 1.8655	* 2.0326	* 1.7907	* 2.6302	*
13	* 1.3733	* 1.5385	* 1.5153	* 1.7661	* 1.6746	* 1.0642	* 0.6036	*
	* 2.1516	* 1.9256	* 1.9509	* 1.7341	* 1.7912	* 2.7380	* 4.4445	*
14	* 1.7518	* 1.7634	* 1.7487	* 1.6909	* 1.0138	* 0.5886	*	*
	* 1.7468	* 1.7420	* 1.7701	* 1.8066	* 2.6301	* 4.4440	*	*
15	* 0.8731	* 0.9085	* 0.8367	* 0.7813	* F-SUB-Q			
	* 3.0516	* 3.0147	* 3.2325	* 3.5420	* M-SUB-Q			

AT 75% POWER, 350 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2566	* 1.3598	* 1.8102	* 1.4197	* 1.7948	* 1.3656	* 1.7465	* 0.8675
	* 2.5280	* 2.2905	* 1.7931	* 2.1915	* 1.8118	* 2.2833	* 1.8658	* 3.2826
9	* 1.3598	* 1.7716	* 1.3972	* 1.8469	* 1.4402	* 1.5327	* 1.7612	* 0.9041
	* 2.2905	* 1.8301	* 2.2300	* 1.7605	* 2.1628	* 2.0361	* 1.8499	* 3.2384
10	* 1.8102	* 1.3949	* 1.4749	* 1.5750	* 1.8638	* 1.5151	* 1.7501	* 0.8342
	* 1.7931	* 2.2341	* 2.1024	* 1.9874	* 1.7434	* 2.0391	* 1.8601	* 3.4204
11	* 1.4197	* 1.8437	* 1.5721	* 1.8549	* 1.5817	* 1.7824	* 1.7033	* 0.7819
	* 2.1915	* 1.7636	* 1.9906	* 1.7502	* 1.9442	* 1.8205	* 1.9063	* 3.7436
12	* 1.7948	* 1.4394	* 1.8625	* 1.5814	* 1.4444	* 1.7081	* 1.0263	*
	* 1.8118	* 2.1642	* 1.7446	* 1.9448	* 2.1422	* 1.8958	* 2.7808	*
13	* 1.3656	* 1.5323	* 1.5146	* 1.7820	* 1.7076	* 1.0896	* 0.6146	*
	* 2.2833	* 2.0365	* 2.0398	* 1.8208	* 1.8964	* 2.9040	* 4.7218	*
14	* 1.7465	* 1.7610	* 1.7499	* 1.7029	* 1.0262	* 0.5989	*	*
	* 1.8658	* 1.8502	* 1.8604	* 1.9068	* 2.7800	* 4.7244	*	*
15	* 0.8675	* 0.9041	* 0.8340	* 0.7816	* F-SUB-Q			
	* 3.2826	* 3.2385	* 3.4209	* 3.7448	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 128 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 350 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2620	* 1.3552	* 1.7943	* 1.4071	* 1.7736	* 1.3507	* 1.7231	* 0.8680
	* 2.5090	* 2.2873	* 1.7967	* 2.1934	* 1.8178	* 2.2842	* 1.8716	* 3.2503
9	* 1.3552	* 1.7599	* 1.3887	* 1.8283	* 1.4384	* 1.5159	* 1.7395	* 0.9036
	* 2.2873	* 1.8341	* 2.2279	* 1.7663	* 2.1521	* 2.0401	* 1.8585	* 3.2034
10	* 1.7943	* 1.3869	* 1.4651	* 1.5653	* 1.8491	* 1.5023	* 1.7308	* 0.8389
	* 1.7967	* 2.2315	* 2.1061	* 1.9885	* 1.7511	* 2.0454	* 1.8693	* 3.3738
11	* 1.4071	* 1.8250	* 1.5625	* 1.8455	* 1.5759	* 1.7712	* 1.6912	* 0.7848
	* 2.1934	* 1.7696	* 1.9918	* 1.7561	* 1.9491	* 1.8307	* 1.9162	* 3.7111
12	* 1.7736	* 1.4370	* 1.8478	* 1.5756	* 1.4424	* 1.7051	* 1.0399	*
	* 1.8178	* 2.1546	* 1.7524	* 1.9497	* 2.1523	* 1.9070	* 2.7489	*
13	* 1.3507	* 1.5155	* 1.5017	* 1.7710	* 1.7046	* 1.1026	* 0.6240	*
	* 2.2842	* 2.0406	* 2.0461	* 1.8310	* 1.9075	* 2.8888	* 4.6805	*
14	* 1.7231	* 1.7393	* 1.7306	* 1.6908	* 1.0398	* 0.6084	*	*
	* 1.8716	* 1.8586	* 1.8695	* 1.9166	* 2.7481	* 4.6802	*	*
15	* 0.8680	* 0.9036	* 0.8387	* 0.7846	* F-SUB-Q			
	* 3.2503	* 3.2035	* 3.3742	* 3.7122	* M-SUB-Q			

AT 75% POWER, 350 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2619	* 1.3614	* 1.8169	* 1.4113	* 1.7905	* 1.3517	* 1.7393	* 0.8548
	* 2.4707	* 2.2359	* 1.7447	* 2.1441	* 1.7674	* 2.2264	* 1.8112	* 3.2007
9	* 1.3614	* 1.7854	* 1.3934	* 1.8526	* 1.4311	* 1.5206	* 1.7573	* 0.8910
	* 2.2359	* 1.7815	* 2.1787	* 1.7165	* 2.1255	* 1.9919	* 1.8051	* 3.1567
10	* 1.8169	* 1.3917	* 1.4693	* 1.5736	* 1.8747	* 1.5073	* 1.7500	* 0.8243
	* 1.7447	* 2.1819	* 2.0665	* 1.9503	* 1.7103	* 2.0109	* 1.8223	* 3.3555
11	* 1.4113	* 1.8492	* 1.5707	* 1.8701	* 1.5849	* 1.7931	* 1.7143	* 0.7752
	* 2.1441	* 1.7194	* 1.9535	* 1.7199	* 1.9229	* 1.7967	* 1.8742	* 3.6853
12	* 1.7905	* 1.4304	* 1.8735	* 1.5847	* 1.4527	* 1.7318	* 1.0298	*
	* 1.7674	* 2.1268	* 1.7114	* 1.9234	* 2.1277	* 1.8703	* 2.7552	*
13	* 1.3517	* 1.5202	* 1.5066	* 1.7929	* 1.7313	* 1.1021	* 0.6184	*
	* 2.2264	* 1.9924	* 2.0116	* 1.7969	* 1.8707	* 2.8664	* 4.6143	*
14	* 1.7393	* 1.7571	* 1.7499	* 1.7140	* 1.0296	* 0.6018	*	*
	* 1.8112	* 1.8051	* 1.8225	* 1.8745	* 2.7547	* 4.6225	*	*
15	* 0.8548	* 0.8910	* 0.8241	* 0.7749	* F-SUB-Q			
	* 3.2007	* 3.1568	* 3.3559	* 3.6865	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 129 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 350 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2612	* 1.3611	* 1.8224	* 1.4097	* 1.7920	* 1.3473	* 1.7403	* 0.8484
	* 2.2586	* 2.0516	* 1.6058	* 1.9779	* 1.6327	* 2.0636	* 1.6781	* 2.9668
9	* 1.3611	* 1.7923	* 1.3920	* 1.8581	* 1.4273	* 1.5173	* 1.7589	* 0.8830
	* 2.0516	* 1.6327	* 2.0062	* 1.5847	* 1.9659	* 1.8451	* 1.6706	* 2.9290
10	* 1.8224	* 1.3905	* 1.4663	* 1.5732	* 1.8806	* 1.5041	* 1.7526	* 0.8165
	* 1.6058	* 2.0092	* 1.9044	* 1.8013	* 1.5774	* 1.8600	* 1.6827	* 3.1082
11	* 1.4097	* 1.8547	* 1.5703	* 1.8758	* 1.5840	* 1.7968	* 1.7195	* 0.7686
	* 1.9779	* 1.5874	* 1.8041	* 1.5841	* 1.7721	* 1.6526	* 1.7197	* 3.3975
12	* 1.7920	* 1.4267	* 1.8793	* 1.5839	* 1.4518	* 1.7386	* 1.0259	*
	* 1.6327	* 1.9670	* 1.5783	* 1.7724	* 1.9538	* 1.7122	* 2.5236	*
13	* 1.3473	* 1.5168	* 1.5034	* 1.7967	* 1.7381	* 1.1011	* 0.6156	*
	* 2.0636	* 1.8455	* 1.8606	* 1.6527	* 1.7126	* 2.6228	* 4.2425	*
14	* 1.7403	* 1.7588	* 1.7525	* 1.7193	* 1.0254	* 0.5985	*	*
	* 1.6781	* 1.6706	* 1.6828	* 1.7199	* 2.5237	* 4.2541	*	*
15	* 0.8484	* 0.8830	* 0.8164	* 0.7683	* F-SUB-Q			
	* 2.9668	* 2.9291	* 3.1085	* 3.3986	* M-SUB-Q			

AT 75% POWER, 350 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2578	* 1.3576	* 1.8198	* 1.4045	* 1.7870	* 1.3408	* 1.7344	* 0.8454
	* 2.0820	* 1.8921	* 1.4783	* 1.8229	* 1.5013	* 1.9048	* 1.5460	* 2.7376
9	* 1.3575	* 1.7906	* 1.3880	* 1.8548	* 1.4254	* 1.5109	* 1.7532	* 0.8826
	* 1.8921	* 1.5028	* 1.8507	* 1.4601	* 1.8153	* 1.7001	* 1.5378	* 2.6929
10	* 1.8198	* 1.3864	* 1.4607	* 1.5691	* 1.8771	* 1.4969	* 1.7474	* 0.8168
	* 1.4783	* 1.8534	* 1.7596	* 1.6618	* 1.4534	* 1.7192	* 1.5524	* 2.8522
11	* 1.4045	* 1.8513	* 1.5662	* 1.8736	* 1.5789	* 1.7922	* 1.7158	* 0.7689
	* 1.8229	* 1.4623	* 1.6644	* 1.4582	* 1.6347	* 1.5221	* 1.5835	* 3.1256
12	* 1.7870	* 1.4240	* 1.8758	* 1.5788	* 1.4461	* 1.7356	* 1.0266	*
	* 1.5013	* 1.8163	* 1.4543	* 1.6349	* 1.8023	* 1.5744	* 2.3171	*
13	* 1.3408	* 1.5104	* 1.4962	* 1.7921	* 1.7352	* 1.1005	* 0.6151	*
	* 1.9048	* 1.7005	* 1.7198	* 1.5221	* 1.5748	* 2.4107	* 3.9043	*
14	* 1.7344	* 1.7531	* 1.7472	* 1.7156	* 1.0265	* 0.5980	*	*
	* 1.5460	* 1.5378	* 1.5525	* 1.5836	* 2.3164	* 3.9157	*	*
15	* 0.8454	* 0.8826	* 0.8166	* 0.7687	* F-SUB-Q			
	* 2.7376	* 2.6929	* 2.8524	* 3.1265	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 130 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 350 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2590	* 1.3504	* 1.8046	* 1.3955	* 1.7706	* 1.3313	* 1.7172	* 0.8488
	* 2.0771	* 1.9003	* 1.4862	* 1.8315	* 1.5134	* 1.9184	* 1.5607	* 2.7309
9	* 1.3504	* 1.7752	* 1.3803	* 1.8373	* 1.4275	* 1.4993	* 1.7359	* 0.8851
	* 1.9003	* 1.5143	* 1.8561	* 1.4699	* 1.8099	* 1.7118	* 1.5513	* 2.6867
10	* 1.8046	* 1.3787	* 1.4548	* 1.5595	* 1.8595	* 1.4848	* 1.7303	* 0.8225
	* 1.4862	* 1.8588	* 1.7711	* 1.6697	* 1.4674	* 1.7298	* 1.5627	* 2.8282
11	* 1.3955	* 1.8338	* 1.5566	* 1.8579	* 1.5682	* 1.7760	* 1.7003	* 0.7711
	* 1.8315	* 1.4725	* 1.6723	* 1.4718	* 1.6476	* 1.5362	* 1.5981	* 3.1159
12	* 1.7706	* 1.4262	* 1.8583	* 1.5682	* 1.4346	* 1.7200	* 1.0334	*
	* 1.5134	* 1.8118	* 1.4683	* 1.6478	* 1.8169	* 1.5873	* 2.3025	*
13	* 1.3313	* 1.4988	* 1.4840	* 1.7759	* 1.7196	* 1.1020	* 0.6181	*
	* 1.9184	* 1.7123	* 1.7305	* 1.5363	* 1.5876	* 2.4065	* 3.8909	*
14	* 1.7172	* 1.7357	* 1.7301	* 1.7001	* 1.0335	* 0.6012	*	*
	* 1.5607	* 1.5513	* 1.5628	* 1.5983	* 2.3015	* 3.8997	*	*
15	* 0.8488	* 0.8851	* 0.8223	* 0.7708	* F-SUB-Q			
	* 2.7309	* 2.6868	* 2.8284	* 3.1168	* M-SUB-Q			

AT 75% POWER, 350 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2553	* 1.3552	* 1.8286	* 1.4009	* 1.7921	* 1.3360	* 1.7400	* 0.8360
	* 1.9343	* 1.7620	* 1.3670	* 1.7020	* 1.3958	* 1.7858	* 1.4382	* 2.5888
9	* 1.3552	* 1.8005	* 1.3848	* 1.8635	* 1.4189	* 1.5090	* 1.7592	* 0.8718
	* 1.7620	* 1.3890	* 1.7253	* 1.3514	* 1.6965	* 1.5879	* 1.4279	* 2.5495
10	* 1.8286	* 1.3832	* 1.4556	* 1.5684	* 1.8857	* 1.4913	* 1.7538	* 0.8063
	* 1.3670	* 1.7279	* 1.6442	* 1.5469	* 1.3467	* 1.6047	* 1.4361	* 2.6924
11	* 1.4009	* 1.8600	* 1.5654	* 1.8813	* 1.5760	* 1.7982	* 1.7239	* 0.7587
	* 1.7020	* 1.3538	* 1.5494	* 1.3530	* 1.5262	* 1.4118	* 1.4657	* 2.9485
12	* 1.7921	* 1.4176	* 1.8844	* 1.5760	* 1.4418	* 1.7434	* 1.0185	*
	* 1.3958	* 1.6974	* 1.3476	* 1.5263	* 1.6808	* 1.4591	* 2.1778	*
13	* 1.3360	* 1.5085	* 1.4905	* 1.7981	* 1.7430	* 1.0952	* 0.6082	*
	* 1.7858	* 1.5883	* 1.6054	* 1.4119	* 1.4594	* 2.2569	* 3.6918	*
14	* 1.7400	* 1.7591	* 1.7536	* 1.7237	* 1.0182	* 0.5903	*	*
	* 1.4382	* 1.4279	* 1.4361	* 1.4658	* 2.1776	* 3.7080	*	*
15	* 0.8360	* 0.8718	* 0.8062	* 0.7584	* F-SUB-Q			
	* 2.5888	* 2.5496	* 2.6926	* 2.9494	* M-SUB-Q			

CNEI-0400-355
Appendix A, Rev. 0
Page 131 of 312

F-SUB-O & M-SUB-O VALUES (F-SUB-O OP MARGIN) - NORMAL OPERATION

	H	G	F	E	D	C	B	A
8	* 1.2494	* 1.3486	* 1.8228	* 1.3934	* 1.7861	* 1.3306	* 1.7360	* 0.8303
	* 1.8252	* 1.6674	* 1.2918	* 1.6135	* 1.3202	* 1.6918	* 1.3589	* 2.4607
9	* 1.3486	* 1.7951	* 1.3776	* 1.8570	* 1.4118	* 1.5045	* 1.7555	* 0.8662
	* 1.6674	* 1.3111	* 1.6348	* 1.2775	* 1.6077	* 1.5017	* 1.3478	* 2.4221
10	* 1.8228	* 1.3761	* 1.4484	* 1.5621	* 1.8798	* 1.4844	* 1.7500	* 0.8011
	* 1.2918	* 1.6373	* 1.5568	* 1.4625	* 1.2705	* 1.5176	* 1.3546	* 2.5557
11	* 1.3934	* 1.8533	* 1.5591	* 1.8755	* 1.5694	* 1.7938	* 1.7205	* 0.7535
	* 1.6135	* 1.2799	* 1.4650	* 1.2757	* 1.4402	* 1.3286	* 1.3791	* 2.7958
12	* 1.7861	* 1.4104	* 1.8784	* 1.5694	* 1.4353	* 1.7392	* 1.0132	*
	* 1.3202	* 1.6088	* 1.2714	* 1.4404	* 1.5815	* 1.3705	* 2.0541	*
13	* 1.3306	* 1.5039	* 1.4836	* 1.7937	* 1.7388	* 1.0895	* 0.6034	*
	* 1.6918	* 1.5021	* 1.5182	* 1.3286	* 1.3708	* 2.1268	* 3.4932	*
14	* 1.7360	* 1.7553	* 1.7499	* 1.7203	* 1.0129	* 0.5855	*	*
	* 1.3589	* 1.3479	* 1.3546	* 1.3793	* 2.0539	* 3.5099	*	*
15	* 0.8303	* 0.8662	* 0.8010	* 0.7532	* F-SUB-Q			
	* 2.4607	* 2.4222	* 2.5559	* 2.7967	* M-SUB-Q			

	H	G	F	E	D	C	B	A
8	* 1.2363	* 1.3233	* 1.7734	* 1.3656	* 1.7395	* 1.3075	* 1.6919	* 0.8284
	* 1.7582	* 1.6171	* 1.2631	* 1.5678	* 1.2900	* 1.6396	* 1.3266	* 2.3532
9	* 1.3233	* 1.7456	* 1.3515	* 1.8027	* 1.3990	* 1.4775	* 1.7117	* 0.8649
	* 1.6171	* 1.2819	* 1.5865	* 1.2516	* 1.5438	* 1.4555	* 1.3144	* 2.3121
10	* 1.7734	* 1.3499	* 1.4280	* 1.5318	* 1.8263	* 1.4571	* 1.7062	* 0.8034
	* 1.2631	* 1.5889	* 1.5067	* 1.4187	* 1.2424	* 1.4703	* 1.3207	* 2.4274
11	* 1.3656	* 1.7991	* 1.5287	* 1.8248	* 1.5398	* 1.7502	* 1.6759	* 0.7523
	* 1.5678	* 1.2540	* 1.4211	* 1.2449	* 1.3946	* 1.2924	* 1.3439	* 2.6649
12	* 1.7395	* 1.3976	* 1.8248	* 1.5397	* 1.4074	* 1.6942	* 1.0138	*
	* 1.2900	* 1.5455	* 1.2434	* 1.3948	* 1.5310	* 1.3336	* 1.9492	*
13	* 1.3075	* 1.4769	* 1.4563	* 1.7501	* 1.6938	* 1.0797	* 0.6021	*
	* 1.6396	* 1.4559	* 1.4709	* 1.2924	* 1.3340	* 2.0354	* 3.3260	*
14	* 1.6919	* 1.7115	* 1.7060	* 1.6756	* 1.0137	* 0.5847	*	
	* 1.3266	* 1.3145	* 1.3208	* 1.3441	* 1.9485	* 3.3392	*	
15	* 0.8284	* 0.8648	* 0.8032	* 0.7521	* F-SUB-Q			
	* 2.3532	* 2.3122	* 2.4277	* 2.6658	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 132 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 350 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2002 *	* 1.2903 *	* 1.7320 *	* 1.3309 *	* 1.7016 *	* 1.2798 *	* 1.6579 *	* 0.7953 *
	* 1.7366 *	* 1.5925 *	* 1.2410 *	* 1.5447 *	* 1.2655 *	* 1.6092 *	* 1.2994 *	* 2.3551 *
9	* 1.2903 *	* 1.7061 *	* 1.3169 *	* 1.7597 *	* 1.3502 *	* 1.4498 *	* 1.6781 *	* 0.8310 *
	* 1.5925 *	* 1.2584 *	* 1.5635 *	* 1.2300 *	* 1.5352 *	* 1.4242 *	* 1.2863 *	* 2.3139 *
10	* 1.7320 *	* 1.3154 *	* 1.3925 *	* 1.4963 *	* 1.7835 *	* 1.4272 *	* 1.6723 *	* 0.7691 *
	* 1.2410 *	* 1.5659 *	* 1.4799 *	* 1.3935 *	* 1.2198 *	* 1.4403 *	* 1.2924 *	* 2.4374 *
11	* 1.3309 *	* 1.7560 *	* 1.4933 *	* 1.7799 *	* 1.5056 *	* 1.7157 *	* 1.6403 *	* 0.7224 *
	* 1.5447 *	* 1.2325 *	* 1.3960 *	* 1.2235 *	* 1.3677 *	* 1.2634 *	* 1.3162 *	* 2.6671 *
12	* 1.7016 *	* 1.3488 *	* 1.7821 *	* 1.5056 *	* 1.3798 *	* 1.6585 *	* 0.9732 *	
	* 1.2655 *	* 1.5361 *	* 1.2206 *	* 1.3679 *	* 1.4977 *	* 1.3052 *	* 1.9476 *	
13	* 1.2798 *	* 1.4493 *	* 1.4264 *	* 1.7155 *	* 1.6580 *	* 1.0420 *	* 0.5771 *	
	* 1.6092 *	* 1.4246 *	* 1.4410 *	* 1.2635 *	* 1.3055 *	* 2.0226 *	* 3.3330 *	
14	* 1.6579 *	* 1.6778 *	* 1.6720 *	* 1.6399 *	* 0.9724 *	* 0.5599 *		
	* 1.2994 *	* 1.2865 *	* 1.2925 *	* 1.3164 *	* 1.9484 *	* 3.3496 *		
15	* 0.7953 *	* 0.8310 *	* 0.7690 *	* 0.7220 *	* F-SUB-Q			
	* 2.3551 *	* 2.3140 *	* 2.4377 *	* 2.6682 *	* M-SUB-Q			

AT 75% POWER, 350 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1189 *	* 1.1981 *	* 1.5828 *	* 1.2349 *	* 1.5605 *	* 1.1929 *	* 1.5202 *	* 0.7382 *
	* 1.8044 *	* 1.6599 *	* 1.3130 *	* 1.6109 *	* 1.3342 *	* 1.6720 *	* 1.3709 *	* 2.4607 *
9	* 1.1981 *	* 1.5607 *	* 1.2231 *	* 1.6088 *	* 1.2534 *	* 1.3472 *	* 1.5393 *	* 0.7690 *
	* 1.6599 *	* 1.3300 *	* 1.6290 *	* 1.3002 *	* 1.5967 *	* 1.4835 *	* 1.3562 *	* 2.4247 *
10	* 1.5828 *	* 1.2213 *	* 1.2989 *	* 1.3909 *	* 1.6324 *	* 1.3315 *	* 1.5330 *	* 0.7125 *
	* 1.3130 *	* 1.6319 *	* 1.5354 *	* 1.4495 *	* 1.2875 *	* 1.4937 *	* 1.3631 *	* 2.5511 *
11	* 1.2349 *	* 1.6053 *	* 1.3878 *	* 1.6294 *	* 1.3989 *	* 1.5761 *	* 1.4994 *	* 0.6675 *
	* 1.6109 *	* 1.3029 *	* 1.4523 *	* 1.2912 *	* 1.4231 *	* 1.3292 *	* 1.3920 *	* 2.7984 *
12	* 1.5605 *	* 1.2529 *	* 1.6310 *	* 1.3988 *	* 1.2850 *	* 1.5178 *	* 0.9032 *	
	* 1.3342 *	* 1.5976 *	* 1.2884 *	* 1.4233 *	* 1.5555 *	* 1.3782 *	* 2.0313 *	
13	* 1.1929 *	* 1.3467 *	* 1.3307 *	* 1.5759 *	* 1.5173 *	* 0.9603 *	* 0.5358 *	
	* 1.6720 *	* 1.4839 *	* 1.4945 *	* 1.3293 *	* 1.3786 *	* 2.1243 *	* 3.4819 *	
14	* 1.5202 *	* 1.5391 *	* 1.5327 *	* 1.4990 *	* 0.9023 *	* 0.5195 *		
	* 1.3709 *	* 1.3564 *	* 1.3632 *	* 1.3923 *	* 2.0326 *	* 3.5011 *		
15	* 0.7382 *	* 0.7690 *	* 0.7123 *	* 0.6672 *	* F-SUB-Q			
	* 2.4607 *	* 2.4248 *	* 2.5514 *	* 2.7996 *	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 133 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 350 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9216	* 0.9868	* 1.2845	* 1.0141	* 1.2671	* 0.9815	* 1.2289	* 0.6070
	* 2.1349	* 1.9621	* 1.5733	* 1.9095	* 1.5986	* 1.9789	* 1.6507	* 2.9216
9	* 0.9868	* 1.2828	* 1.0077	* 1.3290	* 1.0365	* 1.1013	* 1.2433	* 0.6298
	* 1.9621	* 1.5735	* 1.9245	* 1.5295	* 1.8781	* 1.7673	* 1.6340	* 2.8895
10	* 1.2845	* 1.0064	* 1.0736	* 1.1498	* 1.3472	* 1.1003	* 1.2370	* 0.5841
	* 1.5733	* 1.9278	* 1.8080	* 1.7051	* 1.5152	* 1.7602	* 1.6433	* 3.0369
11	* 1.0141	* 1.3266	* 1.1474	* 1.3441	* 1.1527	* 1.2719	* 1.2051	* 0.5455
	* 1.9095	* 1.5322	* 1.7083	* 1.5201	* 1.6789	* 1.6019	* 1.6867	* 3.3437
12	* 1.2671	* 1.0361	* 1.3462	* 1.1526	* 1.0407	* 1.2269	* 0.7425	*
	* 1.5986	* 1.8791	* 1.5162	* 1.6792	* 1.8696	* 1.6587	* 2.4095	*
13	* 0.9815	* 1.1009	* 1.0997	* 1.2717	* 1.2266	* 0.7730	* 0.4428	*
	* 1.9789	* 1.7678	* 1.7611	* 1.6020	* 1.6592	* 2.5735	* 4.1165	*
14	* 1.2289	* 1.2431	* 1.2368	* 1.2048	* 0.7416	* 0.4296	*	*
	* 1.6507	* 1.6342	* 1.6435	* 1.6870	* 2.4115	* 4.1363	*	*
15	* 0.6070	* 0.6298	* 0.5839	* 0.5453	* F-SUB-Q			
	* 2.9216	* 2.8895	* 3.0376	* 3.3451	* M-SUB-Q			

AT 75% POWER, 350 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.4265	* 0.4550	* 0.5469	* 0.4684	* 0.5408	* 0.4412	* 0.4915	* 0.2685
	* 4.5082	* 4.1561	* 3.6048	* 4.0346	* 3.6549	* 4.2953	* 4.0292	* 6.4636
9	* 0.4550	* 0.5313	* 0.4648	* 0.5575	* 0.4798	* 0.4650	* 0.4961	* 0.2756
	* 4.1561	* 3.7055	* 4.0725	* 3.5533	* 3.9576	* 4.0814	* 3.9966	* 6.4616
10	* 0.5469	* 0.4642	* 0.4661	* 0.5108	* 0.5649	* 0.4734	* 0.4931	* 0.2599
	* 3.6048	* 4.0792	* 4.0596	* 3.7408	* 3.5190	* 3.9838	* 4.0239	* 6.6800
11	* 0.4684	* 0.5566	* 0.5097	* 0.5636	* 0.4960	* 0.5373	* 0.4755	* 0.2382
	* 4.0346	* 3.5589	* 3.7474	* 3.5293	* 3.8006	* 3.6987	* 4.1736	* 7.4972
12	* 0.5408	* 0.4795	* 0.5645	* 0.4959	* 0.4412	* 0.4896	* 0.3283	*
	* 3.6549	* 3.9605	* 3.5214	* 3.8017	* 4.3004	* 4.0572	* 5.3276	*
13	* 0.4412	* 0.4648	* 0.4732	* 0.5371	* 0.4894	* 0.3499	* 0.1965	*
	* 4.2953	* 4.0824	* 3.9860	* 3.6994	* 4.0585	* 5.5575	* 9.0903	*
14	* 0.4915	* 0.4960	* 0.4930	* 0.4753	* 0.3279	* 0.1933	*	*
	* 4.0292	* 3.9972	* 4.0246	* 4.1749	* 5.3323	* 9.0076	*	*
15	* 0.2685	* 0.2756	* 0.2599	* 0.2381	* F-SUB-Q			
	* 6.4636	* 6.4617	* 6.6805	* 7.5003	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 134 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 500 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.4508	* 0.5822	* 0.7269	* 0.6633	* 0.7533	* 0.6459	* 0.6972	* 0.4149 *
	* 3.5783	* 3.6540	* 3.1650	* 3.2068	* 3.0542	* 3.3320	* 3.3561	* 4.6286 *
9	* 0.5822	* 0.6843	* 0.6386	* 0.7500	* 0.6743	* 0.6656	* 0.6966	* 0.4232 *
	* 3.6540	* 3.4001	* 3.3649	* 3.0700	* 3.1588	* 3.2353	* 3.3558	* 4.6879 *
10	* 0.7269	* 0.6380	* 0.6453	* 0.6889	* 0.7405	* 0.6529	* 0.6737	* 0.3901 *
	* 3.1650	* 3.3685	* 3.3313	* 3.1181	* 3.0936	* 3.2026	* 3.3938	* 4.8619 *
11	* 0.6633	* 0.7495	* 0.6879	* 0.7119	* 0.6186	* 0.6628	* 0.6134	* 0.3495 *
	* 3.2068	* 3.0715	* 3.1217	* 3.2534	* 3.3137	* 3.3976	* 3.6775	* 5.5592 *
12	* 0.7533	* 0.6740	* 0.7401	* 0.6184	* 0.4515	* 0.5247	* 0.4067	*
	* 3.0542	* 3.1605	* 3.0953	* 3.3148	* 3.4824	* 3.5892	* 4.3469	*
13	* 0.6459	* 0.6655	* 0.6527	* 0.6626	* 0.5245	* 0.3483	* 0.2464	*
	* 3.3320	* 3.2358	* 3.2035	* 3.3984	* 3.5903	* 4.5206	* 6.7667	*
14	* 0.6972	* 0.6966	* 0.6736	* 0.6133	* 0.4063	* 0.2402	*	*
	* 3.3561	* 3.3560	* 3.3942	* 3.6784	* 4.3459	* 6.7608	*	*
15	* 0.4149	* 0.4232	* 0.3901	* 0.3493	* F-SUB-Q			
	* 4.6286	* 4.6879	* 4.8619	* 5.5608	* M-SUB-Q			

AT 75% POWER, 500 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.8118	* 1.0669	* 1.3922	* 1.2121	* 1.4396	* 1.2079	* 1.4228	* 0.8122 *
	* 2.1278	* 2.0393	* 1.6897	* 1.7981	* 1.6375	* 1.8173	* 1.6841	* 2.4225 *
9	* 1.0669	* 1.3469	* 1.1694	* 1.4659	* 1.2309	* 1.3110	* 1.4232	* 0.8270 *
	* 2.0393	* 1.7517	* 1.8720	* 1.6088	* 1.7721	* 1.6766	* 1.6736	* 2.4465 *
10	* 1.3922	* 1.1682	* 1.2442	* 1.2919	* 1.4478	* 1.2722	* 1.3799	* 0.7568 *
	* 1.6897	* 1.8742	* 1.7700	* 1.6950	* 1.6212	* 1.6858	* 1.6959	* 2.5586 *
11	* 1.2121	* 1.4647	* 1.2900	* 1.3885	* 1.2015	* 1.2864	* 1.2635	* 0.6908 *
	* 1.7981	* 1.6098	* 1.6971	* 1.6932	* 1.7147	* 1.7636	* 1.8232	* 2.8846 *
12	* 1.4396	* 1.2305	* 1.4468	* 1.2011	* 0.8796	* 1.0758	* 0.7897	*
	* 1.6375	* 1.7730	* 1.6221	* 1.7152	* 1.8150	* 1.7740	* 2.2611	*
13	* 1.2079	* 1.3108	* 1.2720	* 1.2861	* 1.0753	* 0.6628	* 0.4802	*
	* 1.8173	* 1.6767	* 1.6860	* 1.7639	* 1.7745	* 2.4524	* 3.5103	*
14	* 1.4228	* 1.4232	* 1.3797	* 1.2631	* 0.7889	* 0.4682	*	*
	* 1.6841	* 1.6737	* 1.6961	* 1.8237	* 2.2607	* 3.5055	*	*
15	* 0.8122	* 0.8270	* 0.7567	* 0.6906	* F-SUB-Q			
	* 2.4225	* 2.4466	* 2.5587	* 2.8852	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 135 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 500 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9409 *	* 1.2207 *	* 1.6218 *	* 1.3865 *	* 1.6700 *	* 1.3725 *	* 1.6545 *	* 0.9461 *
	* 1.9355 *	* 1.8076 *	* 1.4684 *	* 1.5930 *	* 1.4302 *	* 1.6156 *	* 1.4497 *	* 2.0845 *
9	* 1.2207 *	* 1.5382 *	* 1.3366 *	* 1.6772 *	* 1.3992 *	* 1.5032 *	* 1.6556 *	* 0.9753 *
	* 1.8076 *	* 1.5473 *	* 1.6559 *	* 1.4226 *	* 1.5798 *	* 1.4720 *	* 1.4445 *	* 2.0868 *
10	* 1.6218 *	* 1.3351 *	* 1.4110 *	* 1.4677 *	* 1.6517 *	* 1.4487 *	* 1.6053 *	* 0.8952 *
	* 1.4684 *	* 1.6581 *	* 1.5602 *	* 1.5082 *	* 1.4381 *	* 1.5003 *	* 1.4748 *	* 2.1861 *
11	* 1.3865 *	* 1.6761 *	* 1.4655 *	* 1.5813 *	* 1.3824 *	* 1.4960 *	* 1.4747 *	* 0.8138 *
	* 1.5930 *	* 1.4240 *	* 1.5101 *	* 1.4942 *	* 1.5186 *	* 1.5297 *	* 1.5839 *	* 2.4834 *
12	* 1.6700 *	* 1.3986 *	* 1.6507 *	* 1.3818 *	* 1.0233 *	* 1.2519 *	* 0.9261 *	
	* 1.4302 *	* 1.5806 *	* 1.4389 *	* 1.5191 *	* 1.6044 *	* 1.5455 *	* 1.9471 *	
13	* 1.3725 *	* 1.5031 *	* 1.4485 *	* 1.4958 *	* 1.2513 *	* 0.7706 *	* 0.5567 *	
	* 1.6156 *	* 1.4721 *	* 1.5003 *	* 1.5299 *	* 1.5459 *	* 2.0951 *	* 3.0634 *	
14	* 1.6545 *	* 1.6556 *	* 1.6052 *	* 1.4743 *	* 0.9255 *	* 0.5461 *		
	* 1.4497 *	* 1.4445 *	* 1.4749 *	* 1.5842 *	* 1.9461 *	* 3.0416 *		
15	* 0.9461 *	* 0.9753 *	* 0.8951 *	* 0.8136 *	F-SUB-Q			
	* 2.0845 *	* 2.0868 *	* 2.1861 *	* 2.4839 *	M-SUB-Q			

AT 75% POWER, 500 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9833 *	* 1.2814 *	* 1.7420 *	* 1.4573 *	* 1.7876 *	* 1.4385 *	* 1.7791 *	* 0.9820 *
	* 1.8833 *	* 1.7464 *	* 1.3849 *	* 1.5354 *	* 1.3528 *	* 1.5581 *	* 1.3585 *	* 2.0227 *
9	* 1.2814 *	* 1.6552 *	* 1.4043 *	* 1.8074 *	* 1.4667 *	* 1.5842 *	* 1.7797 *	* 1.0125 *
	* 1.7464 *	* 1.4561 *	* 1.5961 *	* 1.3370 *	* 1.5266 *	* 1.4105 *	* 1.3557 *	* 2.0260 *
10	* 1.7420 *	* 1.4026 *	* 1.4767 *	* 1.5439 *	* 1.7791 *	* 1.5206 *	* 1.7270 *	* 0.9231 *
	* 1.3849 *	* 1.5983 *	* 1.5071 *	* 1.4517 *	* 1.3523 *	* 1.4476 *	* 1.3869 *	* 2.1445 *
11	* 1.4573 *	* 1.8062 *	* 1.5417 *	* 1.7015 *	* 1.4518 *	* 1.6023 *	* 1.5905 *	* 0.8436 *
	* 1.5354 *	* 1.3381 *	* 1.4536 *	* 1.4037 *	* 1.4599 *	* 1.4455 *	* 1.4818 *	* 2.4225 *
12	* 1.7876 *	* 1.4662 *	* 1.7781 *	* 1.4511 *	* 1.0713 *	* 1.3516 *	* 0.9583 *	
	* 1.3528 *	* 1.5273 *	* 1.3530 *	* 1.4604 *	* 1.5503 *	* 1.4562 *	* 1.9079 *	
13	* 1.4385 *	* 1.5840 *	* 1.5206 *	* 1.6021 *	* 1.3510 *	* 0.8135 *	* 0.5734 *	
	* 1.5581 *	* 1.4106 *	* 1.4475 *	* 1.4457 *	* 1.4566 *	* 2.0294 *	* 3.0255 *	
14	* 1.7791 *	* 1.7797 *	* 1.7269 *	* 1.5901 *	* 0.9580 *	* 0.5627 *		
	* 1.3585 *	* 1.3557 *	* 1.3870 *	* 1.4821 *	* 1.9064 *	* 3.0026 *		
15	* 0.9820 *	* 1.0126 *	* 0.9230 *	* 0.8434 *	F-SUB-Q			
	* 2.0227 *	* 2.0259 *	* 2.1444 *	* 2.4230 *	M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 136 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 500 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9943	* 1.2813	* 1.7503	* 1.4520	* 1.7907	* 1.4304	* 1.7859	* 0.9794 *
	* 1.9280	* 1.7771	* 1.3992	* 1.5617	* 1.3680	* 1.5899	* 1.3717	* 2.0567 *
9	* 1.2813	* 1.6636	* 1.4011	* 1.8187	* 1.4604	* 1.5777	* 1.7862	* 1.0120 *
	* 1.7771	* 1.4740	* 1.6243	* 1.3468	* 1.5527	* 1.4370	* 1.3698	* 2.0561 *
10	* 1.7503	* 1.3993	* 1.4659	* 1.5409	* 1.7899	* 1.5106	* 1.7335	* 0.9226 *
	* 1.3992	* 1.6266	* 1.5417	* 1.4731	* 1.3608	* 1.4731	* 1.3971	* 2.1741 *
11	* 1.4520	* 1.8177	* 1.5390	* 1.7110	* 1.4559	* 1.6076	* 1.6007	* 0.8434 *
	* 1.5617	* 1.3477	* 1.4748	* 1.4157	* 1.4858	* 1.4635	* 1.4912	* 2.4502 *
12	* 1.7907	* 1.4599	* 1.7887	* 1.4553	* 1.0817	* 1.3654	* 0.9612	*
	* 1.3680	* 1.5534	* 1.3615	* 1.4863	* 1.5864	* 1.4734	* 1.9364	*
13	* 1.4304	* 1.5776	* 1.5107	* 1.6075	* 1.3649	* 0.8247	* 0.5740	*
	* 1.5899	* 1.4371	* 1.4730	* 1.4636	* 1.4737	* 2.0612	* 3.0909	*
14	* 1.7859	* 1.7862	* 1.7334	* 1.6005	* 0.9610	* 0.5633	*	
	* 1.3717	* 1.3698	* 1.3971	* 1.4914	* 1.9347	* 3.0672	*	
15	* 0.9794	* 1.0121	* 0.9225	* 0.8433	* F-SUB-Q			
	* 2.0567	* 2.0560	* 2.1740	* 2.4504	* M-SUB-Q			

AT 75% POWER, 500 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9905	* 1.2682	* 1.7218	* 1.4225	* 1.7575	* 1.3993	* 1.7538	* 0.9635
	* 1.9939	* 1.8305	* 1.4451	* 1.6194	* 1.4148	* 1.6445	* 1.4137	* 2.1167
9	* 1.2682	* 1.6378	* 1.3752	* 1.7892	* 1.4307	* 1.5449	* 1.7540	* 0.9968
	* 1.8305	* 1.5213	* 1.6810	* 1.3897	* 1.6104	* 1.4845	* 1.4111	* 2.1132
10	* 1.7218	* 1.3735	* 1.4347	* 1.5125	* 1.7619	* 1.4763	* 1.7023	* 0.9122
	* 1.4451	* 1.6834	* 1.6003	* 1.5255	* 1.4064	* 1.5326	* 1.4435	* 2.2277
11	* 1.4225	* 1.7883	* 1.5106	* 1.6834	* 1.4369	* 1.5797	* 1.5743	* 0.8313
	* 1.6194	* 1.3906	* 1.5273	* 1.4595	* 1.5377	* 1.5131	* 1.5464	* 2.5321
12	* 1.7575	* 1.4303	* 1.7608	* 1.4364	* 1.0751	* 1.3491	* 0.9530	
	* 1.4148	* 1.6111	* 1.4072	* 1.5382	* 1.6521	* 1.5282	* 1.9927	
13	* 1.3993	* 1.5448	* 1.4764	* 1.5796	* 1.3486	* 0.8233	* 0.5691	
	* 1.6445	* 1.4845	* 1.5325	* 1.5131	* 1.5285	* 2.1351	* 3.2027	
14	* 1.7538	* 1.7540	* 1.7023	* 1.5742	* 0.9528	* 0.5584		
	* 1.4137	* 1.4111	* 1.4435	* 1.5466	* 1.9908	* 3.1788		
15	* 0.9635	* 0.9968	* 0.9122	* 0.8312	* F-SUB-Q			
	* 2.1167	* 2.1131	* 2.2276	* 2.5323	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 137 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 500 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9733	* 1.2431	* 1.7028	* 1.3968	* 1.7339	* 1.3729	* 1.7325	* 0.9392
	* 2.0543	* 1.8810	* 1.4995	* 1.6912	* 1.4694	* 1.7126	* 1.4604	* 2.2153
9	* 1.2431	* 1.6219	* 1.3514	* 1.7708	* 1.4036	* 1.5178	* 1.7326	* 0.9719
	* 1.8810	* 1.5766	* 1.7558	* 1.4398	* 1.6841	* 1.5444	* 1.4589	* 2.2119
10	* 1.7028	* 1.3497	* 1.4083	* 1.4878	* 1.7437	* 1.4494	* 1.6823	* 0.8862
	* 1.4995	* 1.7583	* 1.6732	* 1.5922	* 1.4587	* 1.6021	* 1.4965	* 2.3475
11	* 1.3968	* 1.7700	* 1.4859	* 1.6666	* 1.4094	* 1.5608	* 1.5588	* 0.8110
	* 1.6912	* 1.4404	* 1.5940	* 1.4945	* 1.5866	* 1.5553	* 1.6016	* 2.6676
12	* 1.7339	* 1.4032	* 1.7427	* 1.4089	* 1.0550	* 1.3390	* 0.9319	*
	* 1.4694	* 1.6848	* 1.4594	* 1.5871	* 1.7158	* 1.5747	* 2.0796	*
13	* 1.3729	* 1.5177	* 1.4495	* 1.5607	* 1.3385	* 0.8119	* 0.5574	*
	* 1.7126	* 1.5444	* 1.6020	* 1.5553	* 1.5750	* 2.2232	* 3.3545	*
14	* 1.7325	* 1.7327	* 1.6824	* 1.5586	* 0.9319	* 0.5463	*	*
	* 1.4604	* 1.4589	* 1.4965	* 1.6017	* 2.0774	* 3.3332	*	*
15	* 0.9392	* 0.9720	* 0.8861	* 0.8109	* F-SUB-Q			
	* 2.2153	* 2.2118	* 2.3474	* 2.6677	* M-SUB-Q			

AT 75% POWER, 500 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9596	* 1.2244	* 1.6800	* 1.3717	* 1.7066	* 1.3467	* 1.7054	* 0.9197
	* 2.1311	* 1.9550	* 1.5768	* 1.7848	* 1.5458	* 1.8032	* 1.5306	* 2.3338
9	* 1.2244	* 1.6020	* 1.3291	* 1.7466	* 1.3780	* 1.4903	* 1.7057	* 0.9524
	* 1.9550	* 1.6325	* 1.8526	* 1.5126	* 1.7786	* 1.6250	* 1.5298	* 2.3293
10	* 1.6800	* 1.3274	* 1.3834	* 1.4638	* 1.7204	* 1.4229	* 1.6577	* 0.8681
	* 1.5768	* 1.8552	* 1.7682	* 1.6795	* 1.5337	* 1.6924	* 1.5725	* 2.4791
11	* 1.3717	* 1.7457	* 1.4620	* 1.6456	* 1.3879	* 1.5398	* 1.5397	* 0.7962
	* 1.7848	* 1.5132	* 1.6814	* 1.5455	* 1.6464	* 1.6101	* 1.6573	* 2.8213
12	* 1.7066	* 1.3776	* 1.7195	* 1.3875	* 1.0392	* 1.3267	* 0.9191	*
	* 1.5458	* 1.7793	* 1.5345	* 1.6468	* 1.7780	* 1.6267	* 2.1554	*
13	* 1.3467	* 1.4902	* 1.4230	* 1.5397	* 1.3263	* 0.8046	* 0.5510	*
	* 1.8032	* 1.6250	* 1.6923	* 1.6101	* 1.6270	* 2.3079	* 3.4839	*
14	* 1.7054	* 1.7058	* 1.6577	* 1.5396	* 0.9191	* 0.5396	*	*
	* 1.5306	* 1.5298	* 1.5724	* 1.6574	* 2.1530	* 3.4647	*	*
15	* 0.9197	* 0.9524	* 0.8680	* 0.7961	* F-SUB-Q			
	* 2.3338	* 2.3291	* 2.4789	* 2.8214	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 138 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 500 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9542	* 1.2119	* 1.6703	* 1.3551	* 1.6916	* 1.3283	* 1.6896	* 0.9025
	* 2.2297	* 2.0406	* 1.6636	* 1.8917	* 1.6311	* 1.9072	* 1.6101	* 2.4781
9	* 1.2119	* 1.5962	* 1.3151	* 1.7358	* 1.3612	* 1.4722	* 1.6903	* 0.9338
	* 2.0406	* 1.6937	* 1.9640	* 1.5938	* 1.8866	* 1.7168	* 1.6101	* 2.4761
10	* 1.6703	* 1.3135	* 1.3689	* 1.4499	* 1.7111	* 1.4075	* 1.6458	* 0.8509
	* 1.6636	* 1.9668	* 1.8636	* 1.7709	* 1.6004	* 1.7909	* 1.6574	* 2.6429
11	* 1.3551	* 1.7349	* 1.4482	* 1.6398	* 1.3747	* 1.5340	* 1.5346	* 0.7832
	* 1.8917	* 1.5946	* 1.7730	* 1.6072	* 1.7204	* 1.6772	* 1.7231	* 3.0076
12	* 1.6916	* 1.3610	* 1.7102	* 1.3744	* 1.0331	* 1.3301	* 0.9111	*
	* 1.6311	* 1.8872	* 1.6009	* 1.7207	* 1.8589	* 1.6913	* 2.2629	*
13	* 1.3283	* 1.4721	* 1.4075	* 1.5340	* 1.3297	* 0.8058	* 0.5492	*
	* 1.9072	* 1.7169	* 1.7908	* 1.6772	* 1.6916	* 2.4154	* 3.6559	*
14	* 1.6896	* 1.6904	* 1.6459	* 1.5346	* 0.9112	* 0.5373	*	
	* 1.6101	* 1.6100	* 1.6573	* 1.7232	* 2.2602	* 3.6396	*	
15	* 0.9025	* 0.9339	* 0.8508	* 0.7830	* F-SUB-Q			
	* 2.4781	* 2.4759	* 2.6427	* 3.0080	* M-SUB-Q			

AT 75% POWER, 500 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9673	* 1.2185	* 1.6429	* 1.3337	* 1.6569	* 1.3036	* 1.6521	* 0.8976 *
	* 2.3450	* 2.1467	* 1.7685	* 2.0318	* 1.7580	* 2.0453	* 1.7319	* 2.6224 *
9	* 1.2185	* 1.5753	* 1.3025	* 1.7020	* 1.3499	* 1.4449	* 1.6539	* 0.9303 *
	* 2.1467	* 1.7894	* 2.0842	* 1.7123	* 1.9946	* 1.8426	* 1.7320	* 2.6140 *
10	* 1.6429	* 1.3020	* 1.3498	* 1.4321	* 1.6831	* 1.3860	* 1.6142	* 0.8550 *
	* 1.7685	* 2.0854	* 1.9690	* 1.8690	* 1.6930	* 1.8936	* 1.7808	* 2.7738 *
11	* 1.3337	* 1.7010	* 1.4306	* 1.6185	* 1.3779	* 1.5189	* 1.5154	* 0.7855 *
	* 2.0318	* 1.7141	* 1.8711	* 1.7017	* 1.8165	* 1.7764	* 1.8191	* 3.1241 *
12	* 1.6569	* 1.3492	* 1.6823	* 1.3775	* 1.0487	* 1.3311	* 0.9285	*
	* 1.7580	* 1.9960	* 1.6935	* 1.8168	* 1.9774	* 1.8015	* 2.3462	*
13	* 1.3036	* 1.4447	* 1.3860	* 1.5189	* 1.3307	* 0.8287	* 0.5644	*
	* 2.0453	* 1.8427	* 1.8937	* 1.7763	* 1.8018	* 2.5327	* 3.8062	*
14	* 1.6521	* 1.6540	* 1.6144	* 1.5154	* 0.9285	* 0.5517	*	
	* 1.7319	* 1.7319	* 1.7806	* 1.8192	* 2.3436	* 3.7917	*	
15	* 0.8976	* 0.9304	* 0.8550	* 0.7854	* F-SUB-Q			
	* 2.6224	* 2.6138	* 2.7736	* 3.1244	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 139 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 500 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0147 *	* 1.2241 *	* 1.6644 *	* 1.3338 *	* 1.6686 *	* 1.3008 *	* 1.6622 *	* 0.8826 *
	* 2.4629 *	* 2.2534 *	* 1.8432 *	* 2.1549 *	* 1.8571 *	* 2.1736 *	* 1.8242 *	* 2.8216 *
9	* 1.2241 *	* 1.6064 *	* 1.3034 *	* 1.7224 *	* 1.3428 *	* 1.4459 *	* 1.6649 *	* 0.9162 *
	* 2.2534 *	* 1.8604 *	* 2.1925 *	* 1.7822 *	* 2.1169 *	* 1.9541 *	* 1.8248 *	* 2.8117 *
10	* 1.6644 *	* 1.3019 *	* 1.3576 *	* 1.4412 *	* 1.7078 *	* 1.3933 *	* 1.6321 *	* 0.8377 *
	* 1.8432 *	* 2.1955 *	* 2.0676 *	* 1.9603 *	* 1.7591 *	* 1.9863 *	* 1.8541 *	* 3.0077 *
11	* 1.3338 *	* 1.7210 *	* 1.4395 *	* 1.6542 *	* 1.3880 *	* 1.5570 *	* 1.5467 *	* 0.7787 *
	* 2.1549 *	* 1.7840 *	* 1.9625 *	* 1.7661 *	* 1.9006 *	* 1.8476 *	* 1.8893 *	* 3.3242 *
12	* 1.6686 *	* 1.3426 *	* 1.7070 *	* 1.3878 *	* 1.1011 *	* 1.3934 *	* 0.9359 *	
	* 1.8571 *	* 2.1183 *	* 1.7595 *	* 1.9009 *	* 2.0635 *	* 1.8656 *	* 2.4938 *	
13	* 1.3008 *	* 1.4457 *	* 1.3933 *	* 1.5570 *	* 1.3930 *	* 0.8808 *	* 0.5766 *	
	* 2.1736 *	* 1.9543 *	* 1.9865 *	* 1.8475 *	* 1.8658 *	* 2.6733 *	* 4.0414 *	
14	* 1.6622 *	* 1.6650 *	* 1.6323 *	* 1.5467 *	* 0.9360 *	* 0.5632 *		
	* 1.8242 *	* 1.8246 *	* 1.8540 *	* 1.8892 *	* 2.4908 *	* 4.0289 *		
15	* 0.8826 *	* 0.9163 *	* 0.8377 *	* 0.7786 *	* F-SUB-Q			
	* 2.8216 *	* 2.8115 *	* 3.0074 *	* 3.3244 *	* M-SUB-Q			

AT 75% POWER, 500 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1045 *	* 1.2480 *	* 1.6730 *	* 1.3312 *	* 1.6661 *	* 1.2939 *	* 1.6562 *	* 0.8773 *
	* 2.5433 *	* 2.3191 *	* 1.9026 *	* 2.2270 *	* 1.9294 *	* 2.3112 *	* 1.9486 *	* 3.0189 *
9	* 1.2480 *	* 1.6305 *	* 1.3063 *	* 1.7266 *	* 1.3441 *	* 1.4402 *	* 1.6602 *	* 0.9115 *
	* 2.3191 *	* 1.9190 *	* 2.2605 *	* 1.8531 *	* 2.2014 *	* 2.0704 *	* 1.9446 *	* 3.0066 *
10	* 1.6730 *	* 1.3048 *	* 1.3624 *	* 1.4470 *	* 1.7185 *	* 1.3965 *	* 1.6350 *	* 0.8362 *
	* 1.9026 *	* 2.2636 *	* 2.1466 *	* 2.0433 *	* 1.8473 *	* 2.0868 *	* 1.9573 *	* 3.1740 *
11	* 1.3312 *	* 1.7251 *	* 1.4453 *	* 1.6821 *	* 1.4124 *	* 1.5893 *	* 1.5670 *	* 0.7814 *
	* 2.2270 *	* 1.8548 *	* 2.0456 *	* 1.8580 *	* 2.0023 *	* 1.9569 *	* 1.9995 *	* 3.5081 *
12	* 1.6661 *	* 1.3435 *	* 1.7178 *	* 1.4124 *	* 1.2014 *	* 1.4904 *	* 0.9627 *	
	* 1.9294 *	* 2.2027 *	* 1.8478 *	* 2.0025 *	* 2.1874 *	* 1.9712 *	* 2.6384 *	
13	* 1.2939 *	* 1.4400 *	* 1.3965 *	* 1.5895 *	* 1.4903 *	* 0.9685 *	* 0.6021 *	
	* 2.3112 *	* 2.0705 *	* 2.0868 *	* 1.9567 *	* 1.9714 *	* 2.8237 *	* 4.2712 *	
14	* 1.6562 *	* 1.6603 *	* 1.6351 *	* 1.5670 *	* 0.9628 *	* 0.5879 *		
	* 1.9486 *	* 1.9444 *	* 1.9571 *	* 1.9995 *	* 2.6351 *	* 4.2606 *		
15	* 0.8773 *	* 0.9116 *	* 0.8362 *	* 0.7813 *	* F-SUB-Q			
	* 3.0189 *	* 3.0063 *	* 3.1737 *	* 3.5084 *	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 140 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 500 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1738	* 1.2654	* 1.6671	* 1.3245	* 1.6504	* 1.2826	* 1.6369	* 0.8799 *
	* 2.4932	* 2.2856	* 1.8819	* 2.1968	* 1.9103	* 2.2825	* 1.9342	* 2.9592 *
9	* 1.2654	* 1.6416	* 1.3083	* 1.7154	* 1.3541	* 1.4279	* 1.6424	* 0.9133 *
	* 2.2856	* 1.8982	* 2.2257	* 1.8358	* 2.1532	* 2.0469	* 1.9267	* 2.9459 *
10	* 1.6671	* 1.3078	* 1.3612	* 1.4467	* 1.7134	* 1.3933	* 1.6237	* 0.8457 *
	* 1.8819	* 2.2268	* 2.1222	* 2.0179	* 1.8314	* 2.0654	* 1.9414	* 3.0816 *
11	* 1.3245	* 1.7137	* 1.4450	* 1.6950	* 1.4366	* 1.6044	* 1.5721	* 0.7899 *
	* 2.1968	* 1.8375	* 2.0201	* 1.8422	* 1.9815	* 1.9418	* 1.9884	* 3.4285 *
12	* 1.6504	* 1.3535	* 1.7127	* 1.4365	* 1.3004	* 1.5530	* 0.9971	*
	* 1.9103	* 2.1545	* 1.8318	* 1.9816	* 2.1777	* 1.9772	* 2.5760	*
13	* 1.2826	* 1.4277	* 1.3933	* 1.6046	* 1.5529	* 1.0405	* 0.6304	*
	* 2.2825	* 2.0471	* 2.0654	* 1.9416	* 1.9774	* 2.7924	* 4.1838	*
14	* 1.6369	* 1.6425	* 1.6239	* 1.5722	* 0.9972	* 0.6156	*	
	* 1.9342	* 1.9266	* 1.9411	* 1.9883	* 2.5730	* 4.1732	*	
15	* 0.8799	* 0.9134	* 0.8457	* 0.7899	* F-SUB-Q			
	* 2.9592	* 2.9457	* 3.0813	* 3.4287	* M-SUB-Q			

AT 75% POWER, 500 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1949	* 1.2810	* 1.6928	* 1.3299	* 1.6679	* 1.2854	* 1.6533	* 0.8681 *
	* 2.4527	* 2.2334	* 1.8230	* 2.1438	* 1.8505	* 2.2109	* 1.8602	* 2.8982 *
9	* 1.2810	* 1.6779	* 1.3138	* 1.7418	* 1.3497	* 1.4344	* 1.6597	* 0.9027 *
	* 2.2334	* 1.8394	* 2.1760	* 1.7774	* 2.1254	* 1.9884	* 1.8600	* 2.8854 *
10	* 1.6928	* 1.3123	* 1.3724	* 1.4598	* 1.7454	* 1.4038	* 1.6467	* 0.8319 *
	* 1.8230	* 2.1789	* 2.0755	* 1.9714	* 1.7797	* 2.0206	* 1.8827	* 3.0688 *
11	* 1.3299	* 1.7402	* 1.4582	* 1.7343	* 1.4586	* 1.6401	* 1.6054	* 0.7853 *
	* 2.1438	* 1.7790	* 1.9735	* 1.7916	* 1.9422	* 1.8924	* 1.9340	* 3.4015 *
12	* 1.6679	* 1.3492	* 1.7450	* 1.4588	* 1.3410	* 1.6122	* 1.0008	*
	* 1.8505	* 2.1266	* 1.7801	* 1.9422	* 2.1323	* 1.9211	* 2.5673	*
13	* 1.2854	* 1.4342	* 1.4038	* 1.6404	* 1.6121	* 1.0681	* 0.6379	*
	* 2.2109	* 1.9886	* 2.0206	* 1.8921	* 1.9213	* 2.7589	* 4.1661	*
14	* 1.6533	* 1.6598	* 1.6470	* 1.6056	* 1.0010	* 0.6221	*	
	* 1.8602	* 1.8598	* 1.8824	* 1.9338	* 2.5639	* 4.1608	*	
15	* 0.8681	* 0.9027	* 0.8319	* 0.7852	* F-SUB-Q			
	* 2.8982	* 2.8851	* 3.0684	* 3.4019	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 141 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 500 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2067	* 1.2890	* 1.7036	* 1.3325	* 1.6733	* 1.2844	* 1.6572	* 0.8642
	* 2.2951	* 2.1008	* 1.7249	* 2.0273	* 1.7489	* 2.0952	* 1.7643	* 2.7442
9	* 1.2890	* 1.6939	* 1.3177	* 1.7523	* 1.3508	* 1.4349	* 1.6643	* 0.8965
	* 2.1008	* 1.7324	* 2.0568	* 1.6866	* 2.0213	* 1.8836	* 1.7624	* 2.7382
10	* 1.7036	* 1.3161	* 1.3764	* 1.4657	* 1.7605	* 1.4070	* 1.6550	* 0.8287
	* 1.7249	* 2.0592	* 1.9623	* 1.8700	* 1.6868	* 1.9178	* 1.7862	* 2.8968
11	* 1.3325	* 1.7507	* 1.4641	* 1.7522	* 1.4694	* 1.6557	* 1.6207	* 0.7828
	* 2.0273	* 1.6879	* 1.8718	* 1.6961	* 1.8397	* 1.7916	* 1.8253	* 3.2092
12	* 1.6733	* 1.3503	* 1.7602	* 1.4696	* 1.3574	* 1.6386	* 1.0075	*
	* 1.7489	* 2.0222	* 1.6871	* 1.8397	* 2.0149	* 1.8131	* 2.4199	*
13	* 1.2844	* 1.4347	* 1.4069	* 1.6560	* 1.6385	* 1.0837	* 0.6447	*
	* 2.0952	* 1.8838	* 1.9178	* 1.7913	* 1.8133	* 2.5925	* 3.8780	*
14	* 1.6572	* 1.6644	* 1.6553	* 1.6209	* 1.0078	* 0.6281	*	*
	* 1.7643	* 1.7622	* 1.7859	* 1.8251	* 2.4165	* 3.8761	*	*
15	* 0.8642	* 0.8966	* 0.8287	* 0.7827	* F-SUB-Q			
	* 2.7442	* 2.7379	* 2.8965	* 3.2096	* M-SUB-Q			

AT 75% POWER, 500 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2107	* 1.2921	* 1.7072	* 1.3332	* 1.6735	* 1.2820	* 1.6558	* 0.8642
	* 2.1158	* 1.9369	* 1.5861	* 1.8651	* 1.6096	* 1.9348	* 1.6275	* 2.5317
9	* 1.2921	* 1.7002	* 1.3191	* 1.7552	* 1.3559	* 1.4331	* 1.6634	* 0.9004
	* 1.9369	* 1.5948	* 1.8931	* 1.5508	* 1.8576	* 1.7372	* 1.6244	* 2.5144
10	* 1.7072	* 1.3175	* 1.3775	* 1.4680	* 1.7659	* 1.4068	* 1.6559	* 0.8316
	* 1.5861	* 1.8955	* 1.8124	* 1.7253	* 1.5545	* 1.7724	* 1.6451	* 2.6573
11	* 1.3332	* 1.7537	* 1.4664	* 1.7590	* 1.4733	* 1.6608	* 1.6258	* 0.7880
	* 1.8651	* 1.5520	* 1.7270	* 1.5625	* 1.6970	* 1.6513	* 1.6816	* 2.9481
12	* 1.6735	* 1.3554	* 1.7656	* 1.4736	* 1.3627	* 1.6491	* 1.0166	*
	* 1.6096	* 1.8584	* 1.5547	* 1.6969	* 1.8582	* 1.6673	* 2.2193	*
13	* 1.2820	* 1.4329	* 1.4068	* 1.6611	* 1.6490	* 1.0946	* 0.6512	*
	* 1.9348	* 1.7374	* 1.7724	* 1.6510	* 1.6675	* 2.3780	* 3.5592	*
14	* 1.6558	* 1.6636	* 1.6562	* 1.6261	* 1.0169	* 0.6344	*	*
	* 1.6275	* 1.6242	* 1.6448	* 1.6814	* 2.2163	* 3.5581	*	*
15	* 0.8642	* 0.9005	* 0.8317	* 0.7879	* F-SUB-Q			
	* 2.5317	* 2.5142	* 2.6569	* 2.9482	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 142 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 500 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2174	* 1.2939	* 1.7020	* 1.3341	* 1.6662	* 1.2787	* 1.6465	* 0.8728
	* 2.1055	* 1.9368	* 1.5902	* 1.8678	* 1.6198	* 1.9458	* 1.6412	* 2.5187
9	* 1.2939	* 1.6957	* 1.3237	* 1.7483	* 1.3678	* 1.4288	* 1.6545	* 0.9075
	* 1.9368	* 1.5999	* 1.8899	* 1.5573	* 1.8417	* 1.7466	* 1.6369	* 2.5037
10	* 1.7020	* 1.3233	* 1.3788	* 1.4673	* 1.7604	* 1.4038	* 1.6477	* 0.8440
	* 1.5902	* 1.8907	* 1.8153	* 1.7254	* 1.5627	* 1.7754	* 1.6530	* 2.6232
11	* 1.3341	* 1.7468	* 1.4657	* 1.7542	* 1.4725	* 1.6560	* 1.6207	* 0.7959
	* 1.8678	* 1.5585	* 1.7270	* 1.5722	* 1.7039	* 1.6621	* 1.6919	* 2.9211
12	* 1.6662	* 1.3674	* 1.7601	* 1.4728	* 1.3614	* 1.6460	* 1.0330	*
	* 1.6198	* 1.8425	* 1.5631	* 1.7039	* 1.8677	* 1.6767	* 2.1940	*
13	* 1.2787	* 1.4286	* 1.4037	* 1.6564	* 1.6459	* 1.1066	* 0.6609	*
	* 1.9458	* 1.7468	* 1.7754	* 1.6618	* 1.6768	* 2.3622	* 3.5277	*
14	* 1.6465	* 1.6547	* 1.6480	* 1.6210	* 1.0332	* 0.6442	*	*
	* 1.6412	* 1.6368	* 1.6527	* 1.6916	* 2.1911	* 3.5247	*	*
15	* 0.8728	* 0.9075	* 0.8441	* 0.7958	* F-SUB-Q			
	* 2.5187	* 2.5035	* 2.6228	* 2.9212	* M-SUB-Q			

AT 75% POWER, 500 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2232	* 1.3046	* 1.7326	* 1.3442	* 1.6945	* 1.2898	* 1.6755	* 0.8650
	* 1.9478	* 1.7897	* 1.4593	* 1.7320	* 1.4901	* 1.8063	* 1.5097	* 2.3786
9	* 1.3046	* 1.7283	* 1.3305	* 1.7824	* 1.3650	* 1.4447	* 1.6842	* 0.8989
	* 1.7897	* 1.4638	* 1.7548	* 1.4279	* 1.7247	* 1.6167	* 1.5052	* 2.3679
10	* 1.7326	* 1.3290	* 1.3889	* 1.4832	* 1.7946	* 1.4175	* 1.6779	* 0.8318
	* 1.4593	* 1.7564	* 1.6795	* 1.5943	* 1.4299	* 1.6419	* 1.5159	* 2.4904
11	* 1.3442	* 1.7809	* 1.4816	* 1.7886	* 1.4887	* 1.6848	* 1.6514	* 0.7882
	* 1.7320	* 1.4289	* 1.5958	* 1.4378	* 1.5719	* 1.5224	* 1.5471	* 2.7534
12	* 1.6945	* 1.3646	* 1.7943	* 1.4890	* 1.3778	* 1.6792	* 1.0236	*
	* 1.4901	* 1.7253	* 1.4301	* 1.5717	* 1.7179	* 1.5334	* 2.0663	*
13	* 1.2898	* 1.4445	* 1.4175	* 1.6852	* 1.6791	* 1.1076	* 0.6560	*
	* 1.8063	* 1.6169	* 1.6419	* 1.5221	* 1.5334	* 2.2028	* 3.3236	*
14	* 1.6755	* 1.6845	* 1.6783	* 1.6517	* 1.0240	* 0.6382	*	*
	* 1.5097	* 1.5050	* 1.5156	* 1.5468	* 2.0632	* 3.3270	*	*
15	* 0.8650	* 0.8990	* 0.8319	* 0.7881	* F-SUB-Q			
	* 2.3786	* 2.3677	* 2.4900	* 2.7537	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 143 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 500 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2303	* 1.3119	* 1.7458	* 1.3516	* 1.7066	* 1.2968	* 1.6879	* 0.8686
	* 1.8207	* 1.6786	* 1.3669	* 1.6272	* 1.3975	* 1.6982	* 1.4156	* 2.2402
9	* 1.3119	* 1.7418	* 1.3380	* 1.7966	* 1.3735	* 1.4540	* 1.6970	* 0.9031
	* 1.6786	* 1.3694	* 1.6479	* 1.3370	* 1.6180	* 1.5175	* 1.4108	* 2.2288
10	* 1.7458	* 1.3364	* 1.3972	* 1.4933	* 1.8096	* 1.4261	* 1.6908	* 0.8357
	* 1.3669	* 1.6493	* 1.5761	* 1.4941	* 1.3363	* 1.5399	* 1.4189	* 2.3419
11	* 1.3516	* 1.7951	* 1.4916	* 1.8036	* 1.4986	* 1.6977	* 1.6649	* 0.7920
	* 1.6272	* 1.3380	* 1.4956	* 1.3427	* 1.4701	* 1.4212	* 1.4442	* 2.5855
12	* 1.7066	* 1.3732	* 1.8093	* 1.4990	* 1.3865	* 1.6936	* 1.0302	*
	* 1.3975	* 1.6187	* 1.3365	* 1.4699	* 1.6009	* 1.4266	* 1.9301	*
13	* 1.2968	* 1.4538	* 1.4260	* 1.6982	* 1.6935	* 1.1153	* 0.6594	*
	* 1.6982	* 1.5177	* 1.5399	* 1.4209	* 1.4266	* 2.0531	* 3.1084	*
14	* 1.6879	* 1.6973	* 1.6911	* 1.6652	* 1.0306	* 0.6413	*	*
	* 1.4156	* 1.4106	* 1.4185	* 1.4439	* 1.9272	* 3.1127	*	*
15	* 0.8686	* 0.9032	* 0.8358	* 0.7918	* F-SUB-Q			
	* 2.2402	* 2.2286	* 2.3415	* 2.5858	* M-SUB-Q			

AT 75% POWER, 500 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2369	* 1.3139	* 1.7318	* 1.3551	* 1.6934	* 1.2953	* 1.6748	* 0.8826
	* 1.7268	* 1.5979	* 1.3112	* 1.5484	* 1.3427	* 1.6220	* 1.3598	* 2.1064
9	* 1.3139	* 1.7270	* 1.3439	* 1.7808	* 1.3905	* 1.4516	* 1.6841	* 0.9181
	* 1.5979	* 1.3126	* 1.5657	* 1.2828	* 1.5212	* 1.4494	* 1.3544	* 2.0924
10	* 1.7318	* 1.3435	* 1.4027	* 1.4926	* 1.7955	* 1.4252	* 1.6775	* 0.8546
	* 1.3112	* 1.5664	* 1.4977	* 1.4223	* 1.2783	* 1.4674	* 1.3617	* 2.1848
11	* 1.3551	* 1.7792	* 1.4909	* 1.7898	* 1.5004	* 1.6872	* 1.6528	* 0.8055
	* 1.5484	* 1.2838	* 1.4238	* 1.2831	* 1.3945	* 1.3566	* 1.3812	* 2.4226
12	* 1.6934	* 1.3901	* 1.7952	* 1.5005	* 1.3830	* 1.6807	* 1.0519	*
	* 1.3427	* 1.5218	* 1.2785	* 1.3945	* 1.5212	* 1.3603	* 1.7943	*
13	* 1.2953	* 1.4514	* 1.4251	* 1.6877	* 1.6806	* 1.1272	* 0.6715	*
	* 1.6220	* 1.4496	* 1.4675	* 1.3562	* 1.3604	* 1.9243	* 2.9026	*
14	* 1.6748	* 1.6844	* 1.6778	* 1.6531	* 1.0521	* 0.6530	*	*
	* 1.3598	* 1.3542	* 1.3614	* 1.3810	* 1.7920	* 2.9072	*	*
15	* 0.8826	* 0.9182	* 0.8546	* 0.8054	* F-SUB-Q			
	* 2.1064	* 2.0923	* 2.1844	* 2.4227	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 144 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 500 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2284	* 1.3066	* 1.7342	* 1.3446	* 1.6974	* 1.2954	* 1.6813	* 0.8662
	* 1.6614	* 1.5353	* 1.2518	* 1.4923	* 1.2812	* 1.5559	* 1.2977	* 2.0635
9	* 1.3066	* 1.7304	* 1.3325	* 1.7857	* 1.3720	* 1.4552	* 1.6917	* 0.9030
	* 1.5353	* 1.2525	* 1.5090	* 1.2233	* 1.4749	* 1.3856	* 1.2915	* 2.0466
10	* 1.7342	* 1.3310	* 1.3988	* 1.4932	* 1.8014	* 1.4281	* 1.6847	* 0.8354
	* 1.2518	* 1.5101	* 1.4349	* 1.3600	* 1.2181	* 1.4013	* 1.2968	* 2.1483
11	* 1.3446	* 1.7841	* 1.4914	* 1.7959	* 1.4997	* 1.6943	* 1.6584	* 0.7914
	* 1.4923	* 1.2243	* 1.3614	* 1.2224	* 1.3336	* 1.2916	* 1.3163	* 2.3687
12	* 1.6974	* 1.3716	* 1.8011	* 1.5001	* 1.3874	* 1.6874	* 1.0320	*
	* 1.2812	* 1.4755	* 1.2182	* 1.3334	* 1.4510	* 1.2954	* 1.7506	*
13	* 1.2954	* 1.4549	* 1.4280	* 1.6946	* 1.6872	* 1.1127	* 0.6584	*
	* 1.5559	* 1.3858	* 1.4014	* 1.2913	* 1.2955	* 1.8658	* 2.8418	*
14	* 1.6813	* 1.6920	* 1.6851	* 1.6586	* 1.0321	* 0.6400	*	*
	* 1.2977	* 1.2912	* 1.2965	* 1.3161	* 1.7484	* 2.8472	*	*
15	* 0.8662	* 0.9031	* 0.8354	* 0.7913	* F-SUB-Q			
	* 2.0635	* 2.0464	* 2.1480	* 2.3689	* M-SUB-Q			

AT 75% POWER, 500 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1815	* 1.2517	* 1.6432	* 1.2857	* 1.6134	* 1.2459	* 1.5965	* 0.8266
	* 1.6691	* 1.5477	* 1.2741	* 1.5063	* 1.3007	* 1.5630	* 1.3192	* 2.0924
9	* 1.2517	* 1.6411	* 1.2753	* 1.6932	* 1.3063	* 1.3978	* 1.6080	* 0.8596
	* 1.5477	* 1.2742	* 1.5226	* 1.2443	* 1.4945	* 1.3932	* 1.3114	* 2.0804
10	* 1.6432	* 1.2738	* 1.3468	* 1.4326	* 1.7100	* 1.3742	* 1.6014	* 0.7970
	* 1.2741	* 1.5237	* 1.4393	* 1.3679	* 1.2372	* 1.4059	* 1.3171	* 2.1791
11	* 1.2857	* 1.6915	* 1.4308	* 1.7058	* 1.4402	* 1.6146	* 1.5734	* 0.7529
	* 1.5063	* 1.2455	* 1.3695	* 1.2410	* 1.3403	* 1.3075	* 1.3392	* 2.4100
12	* 1.6134	* 1.3058	* 1.7097	* 1.4405	* 1.3349	* 1.6011	* 0.9868	*
	* 1.3007	* 1.4946	* 1.2373	* 1.3401	* 1.4565	* 1.3175	* 1.7696	*
13	* 1.2459	* 1.3976	* 1.3740	* 1.6150	* 1.6009	* 1.0579	* 0.6295	*
	* 1.5630	* 1.3934	* 1.4061	* 1.3073	* 1.3177	* 1.8971	* 2.8789	*
14	* 1.5965	* 1.6082	* 1.6017	* 1.5735	* 0.9867	* 0.6114	*	*
	* 1.3192	* 1.3113	* 1.3169	* 1.3390	* 1.7679	* 2.8875	*	*
15	* 0.8266	* 0.8597	* 0.7970	* 0.7528	* F-SUB-Q			
	* 2.0924	* 2.0802	* 2.1788	* 2.4103	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 145 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 75% POWER, 500 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0210	* 1.0767	* 1.3758	* 1.1036	* 1.3574	* 1.0757	* 1.3403	* 0.7046
	* 1.8803	* 1.7496	* 1.4778	* 1.7060	* 1.5019	* 1.7614	* 1.5282	* 2.3944
9	* 1.0767	* 1.3899	* 1.0976	* 1.4378	* 1.1267	* 1.1991	* 1.3509	* 0.7269
	* 1.7496	* 1.4615	* 1.7191	* 1.4233	* 1.6829	* 1.5798	* 1.5179	* 2.3985
10	* 1.3758	* 1.0965	* 1.1667	* 1.2377	* 1.4537	* 1.1906	* 1.3453	* 0.6783
	* 1.4778	* 1.7212	* 1.6154	* 1.5380	* 1.4128	* 1.5779	* 1.5249	* 2.4966
11	* 1.1036	* 1.4364	* 1.2361	* 1.4498	* 1.2410	* 1.3610	* 1.3169	* 0.6368
	* 1.7060	* 1.4246	* 1.5399	* 1.4168	* 1.5110	* 1.5068	* 1.5567	* 2.7802
12	* 1.3574	* 1.1268	* 1.4533	* 1.2412	* 1.1360	* 1.3431	* 0.8379	*
	* 1.5019	* 1.6830	* 1.4131	* 1.5109	* 1.6646	* 1.5276	* 2.0312	*
13	* 1.0757	* 1.1989	* 1.1903	* 1.3612	* 1.3429	* 0.8823	* 0.5389	*
	* 1.7614	* 1.5800	* 1.5782	* 1.5065	* 1.5277	* 2.2163	* 3.2851	*
14	* 1.3403	* 1.3511	* 1.3455	* 1.3169	* 0.8370	* 0.5237	*	*
	* 1.5282	* 1.5177	* 1.5247	* 1.5566	* 2.0309	* 3.2920	*	*
15	* 0.7046	* 0.7270	* 0.6782	* 0.6367	* F-SUB-Q			
	* 2.3944	* 2.3983	* 2.4965	* 2.7806	* M-SUB-Q			

AT 75% POWER, 500 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.5129	* 0.5389	* 0.6395	* 0.5524	* 0.6331	* 0.5250	* 0.5881	* 0.3365
	* 3.6611	* 3.4160	* 3.1040	* 3.3288	* 3.1448	* 3.5220	* 3.3999	* 4.8973
9	* 0.5389	* 0.6252	* 0.5489	* 0.6511	* 0.5649	* 0.5538	* 0.5919	* 0.3443
	* 3.4160	* 3.1700	* 3.3583	* 3.0628	* 3.2759	* 3.3393	* 3.3805	* 4.9481
10	* 0.6395	* 0.5483	* 0.5516	* 0.5979	* 0.6582	* 0.5595	* 0.5889	* 0.3254
	* 3.1040	* 3.3616	* 3.3352	* 3.1060	* 3.0397	* 3.2762	* 3.4000	* 5.0868
11	* 0.5524	* 0.6505	* 0.5971	* 0.6568	* 0.5817	* 0.6311	* 0.5709	* 0.3010
	* 3.3288	* 3.0656	* 3.1098	* 3.0473	* 3.1430	* 3.1726	* 3.5093	* 5.7483
12	* 0.6331	* 0.5648	* 0.6581	* 0.5818	* 0.5264	* 0.5872	* 0.4016	*
	* 3.1448	* 3.2766	* 3.0406	* 3.1431	* 3.5069	* 3.4111	* 4.1465	*
13	* 0.5250	* 0.5537	* 0.5594	* 0.6311	* 0.5871	* 0.4316	* 0.2576	*
	* 3.5220	* 3.3396	* 3.2769	* 3.1724	* 3.4117	* 4.4334	* 6.7159	*
14	* 0.5881	* 0.5920	* 0.5889	* 0.5709	* 0.4012	* 0.2536	*	*
	* 3.3999	* 3.3803	* 3.3997	* 3.5095	* 4.1463	* 6.6443	*	*
15	* 0.3365	* 0.3443	* 0.3254	* 0.3009	* F-SUB-Q			
	* 4.8973	* 4.9478	* 5.0861	* 5.7492	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 146 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.3880	* 0.5166	* 0.6456	* 0.5980	* 0.7043	* 0.6021	* 0.6375	* 0.3434
	* 4.8989	* 4.8236	* 3.8514	* 4.1494	* 3.5265	* 4.1457	* 3.9537	* 6.6582
9	* 0.5166	* 0.6010	* 0.5635	* 0.6783	* 0.6141	* 0.6172	* 0.6384	* 0.3522
	* 4.8236	* 4.1837	* 4.4399	* 3.6707	* 4.0399	* 4.0761	* 3.9447	* 6.5329
10	* 0.6456	* 0.5624	* 0.5721	* 0.6221	* 0.6731	* 0.5977	* 0.6042	* 0.3197
	* 3.8514	* 4.4479	* 4.4138	* 4.0066	* 3.6781	* 4.1268	* 4.0815	* 7.0291
11	* 0.5980	* 0.6769	* 0.6204	* 0.6381	* 0.5681	* 0.5954	* 0.5358	* 0.2736
	* 4.1494	* 3.6769	* 4.0161	* 3.8636	* 4.2714	* 3.9700	* 4.5555	* 8.0993
12	* 0.7043	* 0.6138	* 0.6720	* 0.5674	* 0.4082	* 0.4465	* 0.3439	*
	* 3.5265	* 4.0424	* 3.6835	* 4.2743	* 4.6987	* 4.4088	* 5.8482	*
13	* 0.6021	* 0.6168	* 0.5971	* 0.5948	* 0.4460	* 0.2787	* 0.1673	*
	* 4.1457	* 4.0785	* 4.1310	* 3.9734	* 4.4123	* 6.0123	* 10.7418	*
14	* 0.6375	* 0.6382	* 0.6037	* 0.5353	* 0.3434	* 0.1626	*	*
	* 3.9537	* 3.9462	* 4.0847	* 4.5601	* 5.8565	* 10.9520	*	*
15	* 0.3434	* 0.3521	* 0.3195	* 0.2733	* F-SUB-Q			
	* 6.6582	* 6.5344	* 7.0342	* 8.1079	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.8356	* 1.0982	* 1.4708	* 1.2748	* 1.6273	* 1.3548	* 1.5988	* 0.7820
	* 2.3571	* 2.3151	* 1.7478	* 2.0150	* 1.5794	* 1.9032	* 1.6307	* 3.0267
9	* 1.0982	* 1.4202	* 1.2038	* 1.5298	* 1.3189	* 1.4806	* 1.6067	* 0.8027
	* 2.3151	* 1.8221	* 2.1497	* 1.6822	* 1.9479	* 1.7443	* 1.6104	* 2.9546
10	* 1.4708	* 1.1987	* 1.3364	* 1.3769	* 1.5111	* 1.4057	* 1.5324	* 0.7267
	* 1.7478	* 2.1541	* 1.9554	* 1.8685	* 1.6945	* 1.8186	* 1.6631	* 3.1910
11	* 1.2748	* 1.5270	* 1.3730	* 1.4352	* 1.2769	* 1.4234	* 1.3497	* 0.6373
	* 2.0150	* 1.6848	* 1.8735	* 1.7483	* 1.9022	* 1.7050	* 1.8733	* 3.6008
12	* 1.6273	* 1.3185	* 1.5090	* 1.2754	* 0.9251	* 1.1155	* 0.7829	*
	* 1.5794	* 1.9486	* 1.6966	* 1.9035	* 2.0019	* 1.7928	* 2.6459	*
13	* 1.3548	* 1.4799	* 1.4046	* 1.4221	* 1.1143	* 0.6115	* 0.3811	*
	* 1.9032	* 1.7451	* 1.8202	* 1.7064	* 1.7942	* 2.8011	* 4.8522	*
14	* 1.5988	* 1.6062	* 1.5314	* 1.3485	* 0.7816	* 0.3699	*	*
	* 1.6307	* 1.6110	* 1.6643	* 1.8751	* 2.6498	* 4.9545	*	*
15	* 0.7820	* 0.8025	* 0.7263	* 0.6367	* F-SUB-Q			
	* 3.0267	* 2.9557	* 3.1933	* 3.6043	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 147 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9697	* 1.1950	* 1.3369	* 1.3975	* 1.5729	* 1.5671	* 1.6358	* 0.8613
	* 2.0742	* 2.0973	* 1.9710	* 1.8845	* 1.6751	* 1.6818	* 1.6127	* 2.7821
9	* 1.1950	* 1.4964	* 1.3726	* 1.5731	* 1.5059	* 1.7018	* 1.6506	* 0.8872
	* 2.0973	* 1.7684	* 1.9265	* 1.6757	* 1.7481	* 1.5465	* 1.5925	* 2.7147
10	* 1.3369	* 1.3659	* 1.5568	* 1.5278	* 1.6144	* 1.6276	* 1.6297	* 0.8190
	* 1.9710	* 1.9360	* 1.7004	* 1.7233	* 1.6263	* 1.6082	* 1.6052	* 2.8956
11	* 1.3975	* 1.5696	* 1.5234	* 1.5350	* 1.4155	* 1.4699	* 1.4898	* 0.7305
	* 1.8845	* 1.6793	* 1.7283	* 1.7185	* 1.7133	* 1.7362	* 1.7389	* 3.2244
12	* 1.5729	* 1.5053	* 1.6129	* 1.4141	* 1.0743	* 1.1768	* 0.8626	*
	* 1.6751	* 1.7488	* 1.6278	* 1.7138	* 1.7142	* 1.7337	* 2.4604	*
13	* 1.5671	* 1.7012	* 1.6264	* 1.4686	* 1.1755	* 0.6955	* 0.4353	*
	* 1.6818	* 1.5472	* 1.6093	* 1.7376	* 1.7349	* 2.5221	* 4.3617	*
14	* 1.6358	* 1.6499	* 1.6286	* 1.4884	* 0.8615	* 0.4256	*	*
	* 1.6127	* 1.5933	* 1.6063	* 1.7407	* 2.4633	* 4.4208	*	*
15	* 0.8613	* 0.8871	* 0.8184	* 0.7297	* F-SUB-Q			
	* 2.7821	* 2.7152	* 2.8978	* 3.2275	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0248	* 1.2298	* 1.3726	* 1.4272	* 1.6763	* 1.6534	* 1.7480	* 0.8675
	* 2.0243	* 2.0685	* 1.7478	* 1.8845	* 1.5794	* 1.6387	* 1.5488	* 2.7821
9	* 1.2298	* 1.5901	* 1.4300	* 1.6486	* 1.5748	* 1.8211	* 1.7665	* 0.8961
	* 2.0685	* 1.7146	* 1.9038	* 1.6487	* 1.7211	* 1.4848	* 1.5288	* 2.7147
10	* 1.3726	* 1.4222	* 1.6477	* 1.5916	* 1.7220	* 1.7350	* 1.7509	* 0.8292
	* 1.7478	* 1.9143	* 1.6522	* 1.7051	* 1.5717	* 1.5528	* 1.5383	* 2.8956
11	* 1.4272	* 1.6447	* 1.5865	* 1.6290	* 1.4832	* 1.5752	* 1.5929	* 0.7474
	* 1.8845	* 1.6526	* 1.7106	* 1.6572	* 1.6679	* 1.6743	* 1.6797	* 3.2244
12	* 1.6763	* 1.5741	* 1.7203	* 1.4817	* 1.1381	* 1.2550	* 0.8744	*
	* 1.5794	* 1.7219	* 1.5732	* 1.6684	* 1.6566	* 1.6735	* 2.4604	*
13	* 1.6534	* 1.8204	* 1.7339	* 1.5737	* 1.2536	* 0.7317	* 0.4443	*
	* 1.6387	* 1.4854	* 1.5538	* 1.6757	* 1.6747	* 2.5027	* 4.3617	*
14	* 1.7480	* 1.7658	* 1.7498	* 1.5913	* 0.8736	* 0.4343	*	*
	* 1.5488	* 1.5296	* 1.5393	* 1.6815	* 2.4633	* 4.4208	*	*
15	* 0.8675	* 0.8959	* 0.8285	* 0.7466	* F-SUB-Q			
	* 2.7821	* 2.7152	* 2.8978	* 3.2275	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 148 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0379	* 1.2276	* 1.3733	* 1.4174	* 1.6967	* 1.6629	* 1.7805	* 0.8661
	* 2.1091	* 2.1589	* 2.0658	* 1.9928	* 1.6599	* 1.6904	* 1.5789	* 2.9470
9	* 1.2276	* 1.6015	* 1.4247	* 1.6635	* 1.5742	* 1.8463	* 1.8016	* 0.8985
	* 2.1589	* 1.7745	* 1.9909	* 1.6997	* 1.7868	* 1.5210	* 1.5573	* 2.8586
10	* 1.3733	* 1.4164	* 1.6499	* 1.5970	* 1.7462	* 1.7564	* 1.7883	* 0.8315
	* 2.0658	* 2.0028	* 1.7180	* 1.7683	* 1.6073	* 1.5890	* 1.5612	* 3.0431
11	* 1.4174	* 1.6593	* 1.5916	* 1.6458	* 1.4974	* 1.6106	* 1.6326	* 0.7530
	* 1.9928	* 1.7039	* 1.7741	* 1.6964	* 1.7203	* 1.7094	* 1.6961	* 3.3409
12	* 1.6967	* 1.5735	* 1.7445	* 1.4957	* 1.1622	* 1.2927	* 0.8856	*
	* 1.6599	* 1.7877	* 1.6090	* 1.7208	* 1.7081	* 1.7079	* 2.5969	*
13	* 1.6629	* 1.8455	* 1.7552	* 1.6090	* 1.2912	* 0.7526	* 0.4480	*
	* 1.6904	* 1.5217	* 1.5901	* 1.7108	* 1.7091	* 2.5763	* 4.6228	*
14	* 1.7805	* 1.8007	* 1.7870	* 1.6308	* 0.8848	* 0.4379	*	*
	* 1.5789	* 1.5581	* 1.5623	* 1.6980	* 2.5987	* 4.6871	*	*
15	* 0.8661	* 0.8984	* 0.8308	* 0.7522	* F-SUB-Q			
	* 2.9470	* 2.8592	* 3.0461	* 3.3444	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0349	* 1.2151	* 1.3603	* 1.3993	* 1.6887	* 1.6561	* 1.7815	* 0.8622
	* 2.2357	* 2.2883	* 2.1789	* 2.1068	* 1.7361	* 1.7641	* 1.6405	* 3.0814
9	* 1.2151	* 1.5881	* 1.4066	* 1.6555	* 1.5578	* 1.8428	* 1.8043	* 0.8960
	* 2.2883	* 1.8736	* 2.1075	* 1.7829	* 1.8820	* 1.5835	* 1.6161	* 2.9831
10	* 1.3603	* 1.3980	* 1.6326	* 1.5864	* 1.7420	* 1.7538	* 1.7937	* 0.8311
	* 2.1789	* 2.1207	* 1.8130	* 1.8587	* 1.6822	* 1.6600	* 1.6224	* 3.1749
11	* 1.3993	* 1.6511	* 1.5810	* 1.6377	* 1.4951	* 1.6192	* 1.6449	* 0.7545
	* 2.1068	* 1.7876	* 1.8649	* 1.7824	* 1.8131	* 1.7860	* 1.7649	* 3.4917
12	* 1.6887	* 1.5571	* 1.7401	* 1.4934	* 1.1694	* 1.3073	* 0.8941	*
	* 1.7361	* 1.8829	* 1.6841	* 1.8138	* 1.8034	* 1.7928	* 2.7184	*
13	* 1.6561	* 1.8419	* 1.7525	* 1.6175	* 1.3057	* 0.7633	* 0.4515	*
	* 1.7641	* 1.5844	* 1.6613	* 1.7878	* 1.7941	* 2.7159	* 4.8894	*
14	* 1.7815	* 1.8033	* 1.7923	* 1.6430	* 0.8933	* 0.4411	*	*
	* 1.6405	* 1.6170	* 1.6237	* 1.7670	* 2.7204	* 4.9605	*	*
15	* 0.8622	* 0.8958	* 0.8304	* 0.7536	* F-SUB-Q			
	* 3.0814	* 2.9838	* 3.1782	* 3.4956	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 149 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0328	* 1.2118	* 1.3618	* 1.3929	* 1.6965	* 1.6600	* 1.7967	* 0.8543
	* 2.3682	* 2.4198	* 2.3101	* 2.2442	* 1.8284	* 1.8586	* 1.7168	* 3.2784
9	* 1.2118	* 1.5920	* 1.4012	* 1.6630	* 1.5532	* 1.8517	* 1.8204	* 0.8889
	* 2.4198	* 1.9848	* 2.2457	* 1.8836	* 1.9991	* 1.6650	* 1.6924	* 3.1716
10	* 1.3618	* 1.3922	* 1.6308	* 1.5892	* 1.7535	* 1.7642	* 1.8137	* 0.8262
	* 2.3101	* 2.2604	* 1.9268	* 1.9704	* 1.7725	* 1.7491	* 1.6997	* 3.3823
11	* 1.3929	* 1.6584	* 1.5837	* 1.6464	* 1.5053	* 1.6424	* 1.6695	* 0.7513
	* 2.2442	* 1.8888	* 1.9773	* 1.8696	* 1.9091	* 1.8520	* 1.8423	* 3.7276
12	* 1.6965	* 1.5524	* 1.7514	* 1.5035	* 1.1768	* 1.3317	* 0.8956	*
	* 1.8284	* 2.0001	* 1.7746	* 1.9098	* 1.9007	* 1.8787	* 2.8863	*
13	* 1.6600	* 1.8506	* 1.7626	* 1.6405	* 1.3300	* 0.7720	* 0.4527	*
	* 1.8586	* 1.6660	* 1.7508	* 1.8540	* 1.8801	* 2.8811	* 5.2262	*
14	* 1.7967	* 1.8193	* 1.8122	* 1.6675	* 0.8948	* 0.4416	*	*
	* 1.7168	* 1.6934	* 1.7012	* 1.8445	* 2.8883	* 5.3099	*	*
15	* 0.8543	* 0.8887	* 0.8252	* 0.7504	* F-SUB-Q			
	* 3.2784	* 3.1724	* 3.3859	* 3.7320	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0362	* 1.2099	* 1.3579	* 1.3839	* 1.6942	* 1.6575	* 1.7997	* 0.8481
	* 2.5388	* 2.5976	* 2.5021	* 2.4353	* 1.9696	* 1.9994	* 1.8399	* 3.5411
9	* 1.2099	* 1.5907	* 1.3946	* 1.6631	* 1.5449	* 1.8520	* 1.8247	* 0.8832
	* 2.5976	* 2.1494	* 2.4395	* 2.0337	* 2.1644	* 1.7887	* 1.8142	* 3.4243
10	* 1.3579	* 1.3853	* 1.6265	* 1.5888	* 1.7561	* 1.7684	* 1.8227	* 0.8236
	* 2.5021	* 2.4560	* 2.0892	* 2.1308	* 1.9095	* 1.8816	* 1.8223	* 3.6538
11	* 1.3839	* 1.6583	* 1.5831	* 1.6495	* 1.5146	* 1.6586	* 1.6868	* 0.7511
	* 2.4353	* 2.0395	* 2.1386	* 1.9794	* 2.0264	* 1.9636	* 1.9512	* 4.0299
12	* 1.6942	* 1.5441	* 1.7539	* 1.5127	* 1.1902	* 1.3550	* 0.9036	*
	* 1.9696	* 2.1655	* 1.9118	* 2.0271	* 2.0188	* 1.9872	* 3.0677	*
13	* 1.6575	* 1.8508	* 1.7665	* 1.6565	* 1.3532	* 0.7865	* 0.4587	*
	* 1.9994	* 1.7898	* 1.8836	* 1.9658	* 1.9888	* 3.0775	* 5.5891	*
14	* 1.7997	* 1.8235	* 1.8210	* 1.6846	* 0.9028	* 0.4470	*	*
	* 1.8399	* 1.8154	* 1.8241	* 1.9537	* 3.0697	* 5.6852	*	*
15	* 0.8481	* 0.8829	* 0.8227	* 0.7501	* F-SUB-Q			
	* 3.5411	* 3.4252	* 3.6580	* 4.0350	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 150 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0552	* 1.2224	* 1.3669	* 1.3828	* 1.7020	* 1.6616	* 1.8111	* 0.8430
	* 2.7764	* 2.8348	* 2.7261	* 2.6518	* 2.1244	* 2.1571	* 1.9767	* 3.8319
9	* 1.2224	* 1.6047	* 1.3981	* 1.6755	* 1.5461	* 1.8608	* 1.8388	* 0.8772
	* 2.8348	* 2.3174	* 2.6725	* 2.2075	* 2.3484	* 1.9281	* 1.9503	* 3.7104
10	* 1.3669	* 1.3886	* 1.6350	* 1.5999	* 1.7711	* 1.7822	* 1.8420	* 0.8227
	* 2.7261	* 2.6908	* 2.2857	* 2.3209	* 2.0634	* 2.0323	* 1.9597	* 3.9519
11	* 1.3828	* 1.6705	* 1.5939	* 1.6678	* 1.5416	* 1.6896	* 1.7170	* 0.7517
	* 2.6518	* 2.2139	* 2.3295	* 2.1328	* 2.1905	* 2.1088	* 2.0883	* 4.3696
12	* 1.7020	* 1.5445	* 1.7688	* 1.5397	* 1.2216	* 1.4001	* 0.9184	*
	* 2.1244	* 2.3496	* 2.0660	* 2.1913	* 2.1855	* 2.1379	* 3.3302	*
13	* 1.6616	* 1.8595	* 1.7801	* 1.6874	* 1.3982	* 0.8162	* 0.4709	*
	* 2.1571	* 1.9295	* 2.0347	* 2.1114	* 2.1397	* 3.3370	* 6.0635	*
14	* 1.8111	* 1.8372	* 1.8400	* 1.7146	* 0.9175	* 0.4583	*	*
	* 1.9767	* 1.9516	* 1.9617	* 2.0911	* 3.3324	* 6.1752	*	*
15	* 0.8430	* 0.8769	* 0.8216	* 0.7506	* F-SUB-Q			
	* 3.8319	* 3.7115	* 3.9567	* 4.3753	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1114	* 1.2344	* 1.3529	* 1.3650	* 1.6750	* 1.6425	* 1.7850	* 0.8419
	* 3.0934	* 3.1489	* 3.0095	* 2.9133	* 2.3294	* 2.3535	* 2.1630	* 4.1282
9	* 1.2344	* 1.5926	* 1.3863	* 1.6587	* 1.5306	* 1.8402	* 1.8171	* 0.8788
	* 3.1489	* 2.5794	* 2.9447	* 2.4317	* 2.5675	* 2.1037	* 2.1306	* 3.9824
10	* 1.3529	* 1.3766	* 1.6237	* 1.5917	* 1.7542	* 1.7711	* 1.8255	* 0.8266
	* 3.0095	* 2.9652	* 2.5196	* 2.5536	* 2.2594	* 2.2136	* 2.1368	* 4.2263
11	* 1.3650	* 1.6536	* 1.5857	* 1.6596	* 1.5627	* 1.6940	* 1.7209	* 0.7611
	* 2.9133	* 2.4387	* 2.5631	* 2.3735	* 2.4336	* 2.3261	* 2.3009	* 4.6479
12	* 1.6750	* 1.5290	* 1.7518	* 1.5609	* 1.2976	* 1.4535	* 0.9526	*
	* 2.3294	* 2.5689	* 2.2623	* 2.4344	* 2.4383	* 2.3843	* 3.6185	*
13	* 1.6425	* 1.8387	* 1.7688	* 1.6917	* 1.4519	* 0.8837	* 0.4961	*
	* 2.3535	* 2.1054	* 2.2164	* 2.3291	* 2.3864	* 3.6770	* 6.6259	*
14	* 1.7850	* 1.8155	* 1.8234	* 1.7184	* 0.9515	* 0.4830	*	*
	* 2.1630	* 2.1321	* 2.1390	* 2.3041	* 3.6216	* 6.7459	*	*
15	* 0.8419	* 0.8784	* 0.8255	* 0.7599	* F-SUB-Q			
	* 4.1282	* 3.9837	* 4.2317	* 4.6543	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 151 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2179	* 1.2815	* 1.3841	* 1.3766	* 1.7022	* 1.6600	* 1.8160	* 0.8351 *
	* 3.4035	* 3.4698	* 3.1933	* 3.1065	* 2.4624	* 2.4953	* 2.2754	* 4.4312 *
9	* 1.2815	* 1.6347	* 1.4060	* 1.6932	* 1.5479	* 1.8666	* 1.8523	* 0.8710 *
	* 3.4698	* 2.7714	* 3.1509	* 2.5752	* 2.7423	* 2.2265	* 2.2461	* 4.2840 *
10	* 1.3841	* 1.3981	* 1.6533	* 1.6227	* 1.7925	* 1.8048	* 1.8678	* 0.8248 *
	* 3.1933	* 3.1732	* 2.6910	* 2.7166	* 2.3954	* 2.3546	* 2.2585	* 4.5662 *
11	* 1.3766	* 1.6880	* 1.6163	* 1.7060	* 1.6341	* 1.7597	* 1.7802	* 0.7622 *
	* 3.1065	* 2.5825	* 2.7270	* 2.5778	* 2.6571	* 2.5295	* 2.4664	* 5.0372 *
12	* 1.7022	* 1.5462	* 1.7899	* 1.6323	* 1.4798	* 1.6041	* 0.9780 *	
	* 2.4624	* 2.7437	* 2.3987	* 2.6580	* 2.6570	* 2.5835	* 4.0239 *	
13	* 1.6600	* 1.8650	* 1.8021	* 1.7571	* 1.6024	* 0.9846	* 0.5186 *	
	* 2.4953	* 2.2283	* 2.3578	* 2.5328	* 2.5857	* 4.0641	* 7.3654 *	
14	* 1.8160	* 1.8505	* 1.8655	* 1.7774	* 0.9770	* 0.5040 *		
	* 2.2753	* 2.2478	* 2.2611	* 2.4700	* 4.0268	* 7.5132 *		
15	* 0.8351	* 0.8707	* 0.8236	* 0.7609	* F-SUB-Q			
	* 4.4312	* 4.2855	* 4.5721	* 5.0444	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3373	* 1.3206	* 1.3985	* 1.3742	* 1.7029	* 1.6595	* 1.8187	* 0.8314 *
	* 3.5498	* 3.6137	* 3.4653	* 3.3728	* 2.6613	* 2.6951	* 2.4515	* 4.7849 *
9	* 1.3206	* 1.6503	* 1.4106	* 1.7025	* 1.5492	* 1.8700	* 1.8613	* 0.8682 *
	* 3.6137	* 2.9437	* 3.4303	* 2.7901	* 2.9738	* 2.4022	* 2.4204	* 4.6217 *
10	* 1.3985	* 1.4061	* 1.6628	* 1.6346	* 1.8034	* 1.8159	* 1.8807	* 0.8259 *
	* 3.4653	* 3.4550	* 2.9283	* 2.9477	* 2.5903	* 2.5438	* 2.4337	* 4.9260 *
11	* 1.3742	* 1.6971	* 1.6281	* 1.7320	* 1.6809	* 1.7954	* 1.8117	* 0.7673 *
	* 3.3728	* 2.7977	* 2.9591	* 2.7402	* 2.8283	* 2.6838	* 2.6623	* 5.4448 *
12	* 1.7029	* 1.5474	* 1.8006	* 1.6791	* 1.6563	* 1.7063	* 1.0068 *	
	* 2.6613	* 2.9755	* 2.5939	* 2.8293	* 2.8427	* 2.7606	* 4.3122 *	
13	* 1.6595	* 1.8682	* 1.8130	* 1.7927	* 1.7047	* 1.0640	* 0.5417 *	
	* 2.6951	* 2.4043	* 2.5475	* 2.6878	* 2.7633	* 4.3750	* 7.9753 *	
14	* 1.8187	* 1.8589	* 1.8782	* 1.8088	* 1.0058	* 0.5261 *		
	* 2.4515	* 2.4223	* 2.4366	* 2.6662	* 4.3158	* 8.1416 *		
15	* 0.8314	* 0.8679	* 0.8246	* 0.7659	* F-SUB-Q			
	* 4.7849	* 4.6234	* 4.9325	* 5.4528	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 152 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3556	* 1.3307	* 1.3876	* 1.3575	* 1.6785	* 1.6418	* 1.7953	* 0.8286
	* 3.5842	* 3.6494	* 3.4716	* 3.3877	* 2.7049	* 2.7472	* 2.5169	* 4.8944
9	* 1.3307	* 1.6369	* 1.4006	* 1.6860	* 1.5339	* 1.8514	* 1.8436	* 0.8674
	* 3.6494	* 2.9775	* 3.4235	* 2.8255	* 3.0098	* 2.4618	* 2.4915	* 4.7204
10	* 1.3876	* 1.3962	* 1.6508	* 1.6252	* 1.7964	* 1.8042	* 1.8650	* 0.8274
	* 3.4716	* 3.4484	* 2.9447	* 2.9758	* 2.6497	* 2.6224	* 2.5198	* 5.0693
11	* 1.3575	* 1.6805	* 1.6186	* 1.7528	* 1.7015	* 1.7954	* 1.8111	* 0.7725
	* 3.3877	* 2.8346	* 2.9881	* 2.7661	* 2.8510	* 2.7060	* 2.6848	* 5.6492
12	* 1.6785	* 1.5320	* 1.7936	* 1.7009	* 1.6921	* 1.7367	* 1.0310	*
	* 2.7049	* 3.0118	* 2.6540	* 2.8520	* 2.8653	* 2.7851	* 4.2808	*
13	* 1.6418	* 1.8495	* 1.8011	* 1.7926	* 1.7350	* 1.1021	* 0.5593	*
	* 2.7472	* 2.4642	* 2.6274	* 2.7103	* 2.7879	* 4.3729	* 7.9317	*
14	* 1.7953	* 1.8412	* 1.8623	* 1.8081	* 1.0298	* 0.5433	*	*
	* 2.5169	* 2.4939	* 2.5234	* 2.6894	* 4.2853	* 8.0957	*	*
15	* 0.8286	* 0.8670	* 0.8261	* 0.7710	* F-SUB-Q			
	* 4.8944	* 4.7227	* 5.0763	* 5.6594	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3736	* 1.3443	* 1.4035	* 1.3596	* 1.6950	* 1.6504	* 1.8162	* 0.8178
	* 3.4465	* 3.5013	* 3.2844	* 3.2281	* 2.5562	* 2.6069	* 2.3738	* 4.7305
9	* 1.3443	* 1.6574	* 1.4081	* 1.7047	* 1.5386	* 1.8670	* 1.8687	* 0.8550
	* 3.5013	* 2.8385	* 3.2543	* 2.6717	* 2.8691	* 2.3305	* 2.3510	* 4.5696
10	* 1.4035	* 1.4036	* 1.6628	* 1.6390	* 1.8285	* 1.8222	* 1.8924	* 0.8196
	* 3.2844	* 3.2787	* 2.7943	* 2.8222	* 2.5037	* 2.4848	* 2.3751	* 4.9055
11	* 1.3596	* 1.6990	* 1.6321	* 1.7928	* 1.7319	* 1.8307	* 1.8446	* 0.7655
	* 3.2281	* 2.6804	* 2.8342	* 2.6712	* 2.7695	* 2.6131	* 2.5884	* 5.4634
12	* 1.6950	* 1.5367	* 1.8256	* 1.7313	* 1.7281	* 1.7811	* 1.0286	*
	* 2.5562	* 2.8712	* 2.5080	* 2.7704	* 2.7875	* 2.6862	* 4.1954	*
13	* 1.6504	* 1.8650	* 1.8189	* 1.8278	* 1.7793	* 1.1149	* 0.5603	*
	* 2.6069	* 2.3329	* 2.4897	* 2.6172	* 2.6888	* 4.2564	* 7.7054	*
14	* 1.8162	* 1.8660	* 1.8896	* 1.8414	* 1.0275	* 0.5431	*	*
	* 2.3738	* 2.3534	* 2.3787	* 2.5928	* 4.1991	* 7.8794	*	*
15	* 0.8178	* 0.8546	* 0.8183	* 0.7640	* F-SUB-Q			
	* 4.7305	* 4.5719	* 4.9138	* 5.4739	* M-SUB-Q			

CNEI-0400-355
Appendix A, Rev. 0
Page 153 of 312

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

	H	G	F	E	D	C	B	A
8	* 1.3698	* 1.3389	* 1.3987	* 1.3490	* 1.6889	* 1.6436	* 1.8133	* 0.8082
	* 3.1296	* 3.1834	* 3.0338	* 3.0355	* 2.4172	* 2.4742	* 2.2477	* 4.4848
9	* 1.3389	* 1.6531	* 1.4002	* 1.7001	* 1.5285	* 1.8623	* 1.8683	* 0.8452
	* 3.1834	* 2.5797	* 3.0426	* 2.5062	* 2.7203	* 2.2109	* 2.2262	* 4.3312
10	* 1.3987	* 1.3956	* 1.6552	* 1.6338	* 1.8314	* 1.8190	* 1.8933	* 0.8124
	* 3.0338	* 3.0522	* 2.5966	* 2.6316	* 2.3618	* 2.3559	* 2.2445	* 4.6340
11	* 1.3490	* 1.6943	* 1.6267	* 1.7990	* 1.7343	* 1.8361	* 1.8502	* 0.7585
	* 3.0355	* 2.5144	* 2.6426	* 2.4212	* 2.5143	* 2.3623	* 2.3408	* 5.1347
12	* 1.6889	* 1.5265	* 1.8284	* 1.7338	* 1.7333	* 1.7908	* 1.0252	*
	* 2.4172	* 2.7221	* 2.3659	* 2.5151	* 2.5311	* 2.4337	* 3.8293	*
13	* 1.6436	* 1.8601	* 1.8154	* 1.8330	* 1.7890	* 1.1155	* 0.5590	*
	* 2.4742	* 2.2133	* 2.3604	* 2.3662	* 2.4361	* 3.8859	* 7.0555	*
14	* 1.8133	* 1.8655	* 1.8902	* 1.8469	* 1.0241	* 0.5413	*	
	* 2.2477	* 2.2286	* 2.2479	* 2.3449	* 3.8326	* 7.2224	*	
15	* 0.8082	* 0.8448	* 0.8110	* 0.7570	* F-SUB-Q			
	* 4.4848	* 4.3335	* 4.6420	* 5.1446	* M-SUB-Q			

	H	G	F	E	D	C	B	A
8	* 1.3561	* 1.3245	* 1.3840	* 1.3324	* 1.6714	* 1.6274	* 1.7969	* 0.8001
	* 2.8650	* 2.9145	* 2.7438	* 2.7289	* 2.1702	* 2.2225	* 2.0169	* 4.0366
9	* 1.3245	* 1.6365	* 1.3844	* 1.6837	* 1.5109	* 1.8460	* 1.8533	* 0.8380
	* 2.9145	* 2.3503	* 2.7297	* 2.2456	* 2.4455	* 1.9848	* 1.9957	* 3.8918
10	* 1.3840	* 1.3798	* 1.6379	* 1.6185	* 1.8184	* 1.8034	* 1.8787	* 0.8057
	* 2.7438	* 2.7504	* 2.3487	* 2.3722	* 2.1160	* 2.1090	* 2.0087	* 4.1570
11	* 1.3324	* 1.6778	* 1.6114	* 1.7877	* 1.7221	* 1.8239	* 1.8387	* 0.7545
	* 2.7289	* 2.2532	* 2.3826	* 2.2207	* 2.3070	* 2.1584	* 2.1374	* 4.6026
12	* 1.6714	* 1.5089	* 1.8153	* 1.7215	* 1.7223	* 1.7815	* 1.0213	*
	* 2.1702	* 2.4472	* 2.1197	* 2.3078	* 2.3252	* 2.2338	* 3.5038	*
13	* 1.6274	* 1.8437	* 1.7996	* 1.8207	* 1.7796	* 1.1121	* 0.5570	*
	* 2.2225	* 1.9870	* 2.1134	* 2.1621	* 2.2361	* 3.5666	* 6.4883	*
14	* 1.7969	* 1.8504	* 1.8755	* 1.8352	* 1.0202	* 0.5393	*	
	* 2.0169	* 1.9978	* 2.0120	* 2.1414	* 3.5072	* 6.6436	*	
15	* 0.8001	* 0.8375	* 0.8042	* 0.7529	* F-SUB-Q			
	* 4.0366	* 3.8939	* 4.1644	* 4.6119	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 154 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3326	* 1.3013	* 1.3566	* 1.3082	* 1.6382	* 1.6007	* 1.7635	* 0.7938
	* 2.8299	* 2.8805	* 2.7045	* 2.6883	* 2.1436	* 2.1883	* 1.9908	* 3.9515
9	* 1.3013	* 1.6043	* 1.3599	* 1.6518	* 1.4845	* 1.8157	* 1.8202	* 0.8331
	* 2.8805	* 2.3209	* 2.6806	* 2.2106	* 2.4073	* 1.9525	* 1.9668	* 3.8000
10	* 1.3566	* 1.3553	* 1.6086	* 1.5916	* 1.7864	* 1.7737	* 1.8453	* 0.8002
	* 2.7045	* 2.7013	* 2.3048	* 2.3266	* 2.0838	* 2.0699	* 1.9760	* 4.0535
11	* 1.3082	* 1.6459	* 1.5845	* 1.7568	* 1.6947	* 1.7922	* 1.8085	* 0.7505
	* 2.6883	* 2.2182	* 2.3369	* 2.2022	* 2.2835	* 2.1383	* 2.1156	* 4.4712
12	* 1.6382	* 1.4824	* 1.7833	* 1.6942	* 1.6955	* 1.7524	* 1.0198	*
	* 2.1436	* 2.4091	* 2.0877	* 2.2843	* 2.3014	* 2.2139	* 3.4216	*
13	* 1.6007	* 1.8134	* 1.7698	* 1.7890	* 1.7504	* 1.1049	* 0.5557	*
	* 2.1883	* 1.9548	* 2.0747	* 2.1421	* 2.2163	* 3.5088	* 6.3562	*
14	* 1.7635	* 1.8172	* 1.8420	* 1.8050	* 1.0185	* 0.5383	*	*
	* 1.9908	* 1.9690	* 1.9794	* 2.1196	* 3.4254	* 6.5052	*	*
15	* 0.7938	* 0.8326	* 0.7987	* 0.7489	* F-SUB-Q			
	* 3.9515	* 3.8021	* 4.0611	* 4.4805	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3322	* 1.2995	* 1.3634	* 1.3053	* 1.6490	* 1.6022	* 1.7770	* 0.7788
	* 2.5555	* 2.6002	* 2.4268	* 2.4342	* 1.9267	* 1.9787	* 1.7891	* 3.6547
9	* 1.2995	* 1.6137	* 1.3585	* 1.6608	* 1.4810	* 1.8226	* 1.8338	* 0.8159
	* 2.6002	* 2.0714	* 2.4151	* 1.9819	* 2.1823	* 1.7592	* 1.7667	* 3.5209
10	* 1.3634	* 1.3538	* 1.6097	* 1.5939	* 1.7981	* 1.7781	* 1.8598	* 0.7858
	* 2.4268	* 2.4343	* 2.0704	* 2.0902	* 1.8680	* 1.8615	* 1.7690	* 3.7326
11	* 1.3053	* 1.6548	* 1.5866	* 1.7684	* 1.6976	* 1.8065	* 1.8208	* 0.7343
	* 2.4342	* 1.9889	* 2.0997	* 1.9889	* 2.0686	* 1.9056	* 1.8850	* 4.1190
12	* 1.6490	* 1.4789	* 1.7950	* 1.6971	* 1.6990	* 1.7640	* 0.9984	*
	* 1.9267	* 2.1839	* 1.8715	* 2.0707	* 2.0800	* 1.9978	* 3.1622	*
13	* 1.6022	* 1.8202	* 1.7741	* 1.8032	* 1.7621	* 1.0905	* 0.5438	*
	* 1.9787	* 1.7614	* 1.8657	* 1.9090	* 2.0000	* 3.2233	* 5.9105	*
14	* 1.7770	* 1.8307	* 1.8564	* 1.8172	* 0.9973	* 0.5256	*	*
	* 1.7891	* 1.7688	* 1.7721	* 1.8887	* 3.1652	* 6.0615	*	*
15	* 0.7788	* 0.8154	* 0.7843	* 0.7326	* F-SUB-Q			
	* 3.6547	* 3.5230	* 3.7396	* 4.1278	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 155 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3196 *	* 1.2863 *	* 1.3506 *	* 1.2915 *	* 1.6338 *	* 1.5870 *	* 1.7607 *	* 0.7686 *
	* 2.3159 *	* 2.3722 *	* 2.2244 *	* 2.2473 *	* 1.7792 *	* 1.8291 *	* 1.6536 *	* 3.4004 *
9	* 1.2863 *	* 1.5994 *	* 1.3454 *	* 1.6455 *	* 1.4653 *	* 1.8069 *	* 1.8171 *	* 0.8055 *
	* 2.3722 *	* 1.8904 *	* 2.2165 *	* 1.8207 *	* 2.0159 *	* 1.6226 *	* 1.6294 *	* 3.2735 *
10	* 1.3506 *	* 1.3407 *	* 1.5951 *	* 1.5796 *	* 1.7811 *	* 1.7614 *	* 1.8427 *	* 0.7756 *
	* 2.2244 *	* 2.2343 *	* 1.8959 *	* 1.9153 *	* 1.7172 *	* 1.7108 *	* 1.6272 *	* 3.4561 *
11	* 1.2915 *	* 1.6395 *	* 1.5723 *	* 1.7522 *	* 1.6813 *	* 1.7895 *	* 1.8025 *	* 0.7244 *
	* 2.2473 *	* 1.8272 *	* 1.9241 *	* 1.8071 *	* 1.8826 *	* 1.7529 *	* 1.7314 *	* 3.7990 *
12	* 1.6338 *	* 1.4633 *	* 1.7779 *	* 1.6808 *	* 1.6825 *	* 1.7466 *	* 0.9857 *	
	* 1.7792 *	* 2.0173 *	* 1.7205 *	* 1.8832 *	* 1.8896 *	* 1.8173 *	* 2.9028 *	
13	* 1.5870 *	* 1.8044 *	* 1.7573 *	* 1.7861 *	* 1.7447 *	* 1.0774 *	* 0.5367 *	
	* 1.8291 *	* 1.6247 *	* 1.7147 *	* 1.7561 *	* 1.8193 *	* 2.9473 *	* 5.4103 *	
14	* 1.7607 *	* 1.8139 *	* 1.8393 *	* 1.7988 *	* 0.9846 *	* 0.5186 *		
	* 1.6536 *	* 1.6317 *	* 1.6301 *	* 1.7349 *	* 2.9056 *	* 5.5506 *		
15	* 0.7686 *	* 0.8050 *	* 0.7741 *	* 0.7227 *	* F-SUB-Q			
	* 3.4004 *	* 3.2755 *	* 3.4627 *	* 3.8073 *	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2928 *	* 1.2603 *	* 1.3149 *	* 1.2662 *	* 1.5876 *	* 1.5519 *	* 1.7081 *	* 0.7639 *
	* 2.1859 *	* 2.2430 *	* 2.0956 *	* 2.1196 *	* 1.6962 *	* 1.7338 *	* 1.5799 *	* 3.1820 *
9	* 1.2603 *	* 1.5566 *	* 1.3191 *	* 1.6014 *	* 1.4362 *	* 1.7637 *	* 1.7632 *	* 0.8021 *
	* 2.2430 *	* 1.7777 *	* 2.0785 *	* 1.7223 *	* 1.9010 *	* 1.5382 *	* 1.5524 *	* 3.0546 *
10	* 1.3149 *	* 1.3146 *	* 1.5628 *	* 1.5463 *	* 1.7295 *	* 1.7197 *	* 1.7872 *	* 0.7700 *
	* 2.0956 *	* 2.0884 *	* 1.7761 *	* 1.7963 *	* 1.6269 *	* 1.6133 *	* 1.5466 *	* 3.2203 *
11	* 1.2662 *	* 1.5956 *	* 1.5391 *	* 1.7031 *	* 1.6432 *	* 1.7348 *	* 1.7468 *	* 0.7212 *
	* 2.1196 *	* 1.7284 *	* 1.8046 *	* 1.7167 *	* 1.7799 *	* 1.6481 *	* 1.6299 *	* 3.5116 *
12	* 1.5876 *	* 1.4342 *	* 1.7264 *	* 1.6427 *	* 1.6436 *	* 1.6945 *	* 0.9824 *	
	* 1.6962 *	* 1.9039 *	* 1.6299 *	* 1.7804 *	* 1.7833 *	* 1.7280 *	* 2.6918 *	
13	* 1.5519 *	* 1.7613 *	* 1.7157 *	* 1.7315 *	* 1.6927 *	* 1.0649 *	* 0.5352 *	
	* 1.7338 *	* 1.5402 *	* 1.6170 *	* 1.6512 *	* 1.7299 *	* 2.7453 *	* 5.0095 *	
14	* 1.7081 *	* 1.7601 *	* 1.7838 *	* 1.7433 *	* 0.9811 *	* 0.5180 *		
	* 1.5799 *	* 1.5546 *	* 1.5493 *	* 1.6332 *	* 2.6952 *	* 5.1311 *		
15	* 0.7639 *	* 0.8016 *	* 0.7685 *	* 0.7195 *	* F-SUB-Q			
	* 3.1820 *	* 3.0564 *	* 3.2263 *	* 3.5192 *	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 156 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2871	* 1.2555	* 1.3146	* 1.2682	* 1.5801	* 1.5429	* 1.6951	* 0.7509
	* 2.0118	* 2.0555	* 1.9433	* 1.9808	* 1.5983	* 1.6364	* 1.4941	* 3.0444
9	* 1.2555	* 1.5515	* 1.3166	* 1.5965	* 1.4313	* 1.7520	* 1.7476	* 0.7867
	* 2.0555	* 1.6527	* 1.9372	* 1.6106	* 1.7833	* 1.4509	* 1.4664	* 2.9294
10	* 1.3146	* 1.3121	* 1.5595	* 1.5434	* 1.7167	* 1.7092	* 1.7716	* 0.7551
	* 1.9433	* 1.9431	* 1.6550	* 1.6732	* 1.5264	* 1.5134	* 1.4565	* 3.0752
11	* 1.2682	* 1.5908	* 1.5364	* 1.6909	* 1.6347	* 1.7209	* 1.7271	* 0.7045
	* 1.9808	* 1.6162	* 1.6807	* 1.5928	* 1.6451	* 1.5391	* 1.5304	* 3.3508
12	* 1.5801	* 1.4294	* 1.7136	* 1.6342	* 1.6338	* 1.6780	* 0.9581	*
	* 1.5983	* 1.7855	* 1.5292	* 1.6456	* 1.6585	* 1.6112	* 2.5381	*
13	* 1.5429	* 1.7497	* 1.7052	* 1.7177	* 1.6761	* 1.0423	* 0.5231	*
	* 1.6364	* 1.4528	* 1.5168	* 1.5420	* 1.6130	* 2.6096	* 4.7557	*
14	* 1.6951	* 1.7446	* 1.7684	* 1.7237	* 0.9569	* 0.5056	*	
	* 1.4941	* 1.4685	* 1.4591	* 1.5334	* 2.5410	* 4.8775	*	
15	* 0.7509	* 0.7862	* 0.7537	* 0.7029	* F-SUB-Q			
	* 3.0444	* 2.9311	* 3.0810	* 3.3581	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2286	* 1.2125	* 1.2929	* 1.2564	* 1.5131	* 1.4843	* 1.6244	* 0.7436
	* 1.9807	* 1.9974	* 1.6521	* 1.8976	* 1.5070	* 1.6182	* 1.4825	* 2.9307
9	* 1.2125	* 1.4939	* 1.2729	* 1.5525	* 1.3861	* 1.6743	* 1.6685	* 0.7772
	* 1.9974	* 1.6177	* 1.8917	* 1.5665	* 1.7466	* 1.4431	* 1.4564	* 2.8266
10	* 1.2929	* 1.2690	* 1.4945	* 1.5058	* 1.6511	* 1.6364	* 1.6905	* 0.7410
	* 1.6521	* 1.8974	* 1.6323	* 1.6194	* 1.5095	* 1.4959	* 1.4457	* 2.9782
11	* 1.2564	* 1.5473	* 1.4992	* 1.6160	* 1.5733	* 1.6494	* 1.6578	* 0.6854
	* 1.8976	* 1.5717	* 1.6264	* 1.5532	* 1.5996	* 1.4758	* 1.4980	* 3.2631
12	* 1.5131	* 1.3843	* 1.6483	* 1.5728	* 1.5597	* 1.6082	* 0.9445	
	* 1.5070	* 1.7488	* 1.5122	* 1.6012	* 1.6251	* 1.5740	* 2.4244	
13	* 1.4843	* 1.6713	* 1.6327	* 1.6465	* 1.6064	* 1.0065	* 0.5098	
	* 1.6182	* 1.4448	* 1.4992	* 1.4783	* 1.5757	* 2.5228	* 4.5799	
14	* 1.6244	* 1.6657	* 1.6874	* 1.6545	* 0.9430	* 0.4924	*	
	* 1.4825	* 1.4585	* 1.4483	* 1.5010	* 2.4278	* 4.7000	*	
15	* 0.7436	* 0.7768	* 0.7397	* 0.6838	* F-SUB-Q			
	* 2.9307	* 2.8282	* 2.9836	* 3.2700	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 157 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0245	* 1.0699	* 1.3881	* 1.1306	* 1.5262	* 1.2577	* 1.5586	* 0.6824
	* 2.2654	* 2.1542	* 1.6521	* 2.0287	* 1.5070	* 1.8382	* 1.4832	* 3.0840
9	* 1.0699	* 1.4098	* 1.0967	* 1.4599	* 1.2024	* 1.4304	* 1.5915	* 0.7115
	* 2.1542	* 1.6406	* 2.1071	* 1.5919	* 1.9315	* 1.6227	* 1.4636	* 2.9837
10	* 1.3881	* 1.0896	* 1.2589	* 1.3331	* 1.5445	* 1.3820	* 1.5741	* 0.6586
	* 1.6521	* 2.1129	* 1.8584	* 1.7533	* 1.5323	* 1.7016	* 1.4897	* 3.2236
11	* 1.1306	* 1.4530	* 1.3277	* 1.5308	* 1.3762	* 1.6144	* 1.4847	* 0.6043
	* 2.0287	* 1.5977	* 1.7604	* 1.5578	* 1.7363	* 1.4758	* 1.6006	* 3.5604
12	* 1.5262	* 1.2002	* 1.5416	* 1.3749	* 1.2815	* 1.4970	* 0.8684	*
	* 1.5070	* 1.9350	* 1.5352	* 1.7379	* 1.8927	* 1.6168	* 2.5245	*
13	* 1.2577	* 1.4286	* 1.3789	* 1.6117	* 1.4952	* 0.8867	* 0.4498	*
	* 1.8382	* 1.6248	* 1.7054	* 1.4783	* 1.6188	* 2.7417	* 4.9839	*
14	* 1.5586	* 1.5893	* 1.5713	* 1.4818	* 0.8663	* 0.4351	*	*
	* 1.4832	* 1.4650	* 1.4923	* 1.6038	* 2.5305	* 5.1084	*	*
15	* 0.6824	* 0.7109	* 0.6574	* 0.6030	* F-SUB-Q			
	* 3.0840	* 2.9854	* 3.2286	* 3.5678	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.4432	* 0.4768	* 0.5702	* 0.5087	* 0.6121	* 0.5247	* 0.5753	* 0.2964
	* 5.0381	* 4.6631	* 3.8820	* 4.3624	* 3.6234	* 4.2493	* 3.8806	* 6.8828
9	* 0.4768	* 0.5562	* 0.4908	* 0.6014	* 0.5379	* 0.5606	* 0.5826	* 0.3052
	* 4.6631	* 3.9989	* 4.5295	* 3.7202	* 4.1735	* 3.9972	* 3.8437	* 6.7328
10	* 0.5702	* 0.4896	* 0.5105	* 0.5672	* 0.6316	* 0.5580	* 0.5747	* 0.2869
	* 3.8819	* 4.5412	* 4.4139	* 3.9727	* 3.5905	* 4.0612	* 3.9346	* 7.1615
11	* 0.5087	* 0.5994	* 0.5651	* 0.6269	* 0.5655	* 0.6265	* 0.5396	* 0.2564
	* 4.3624	* 3.7324	* 3.9875	* 3.6434	* 4.0497	* 3.6599	* 4.2437	* 8.1191
12	* 0.6121	* 0.5369	* 0.6305	* 0.5648	* 0.5069	* 0.5518	* 0.3736	*
	* 3.6234	* 4.1816	* 3.5977	* 4.0547	* 4.5683	* 4.2121	* 5.6519	*
13	* 0.5247	* 0.5600	* 0.5569	* 0.6254	* 0.5512	* 0.3888	* 0.1953	*
	* 4.2493	* 4.0018	* 4.0697	* 3.6659	* 4.2173	* 6.0334	* 11.1105	*
14	* 0.5753	* 0.5818	* 0.5737	* 0.5385	* 0.3726	* 0.1921	*	*
	* 3.8806	* 3.8472	* 3.9413	* 4.2520	* 5.6660	* 11.2029	*	*
15	* 0.2964	* 0.3050	* 0.2865	* 0.2558	* F-SUB-Q			
	* 6.8828	* 6.7365	* 7.1722	* 8.1355	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 158 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 75 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.3086	* 0.4065	* 0.5172	* 0.4772	* 0.5625	* 0.4794	* 0.5164	* 0.2795
	* 6.0489	* 5.9906	* 4.9470	* 5.3470	* 4.5344	* 5.3470	* 4.9826	* 8.3385
9	* 0.4065	* 0.4794	* 0.4484	* 0.5456	* 0.4897	* 0.4965	* 0.5173	* 0.2873
	* 5.9906	* 5.2000	* 5.7362	* 4.6895	* 5.2058	* 5.1824	* 4.9660	* 8.1607
10	* 0.5172	* 0.4476	* 0.4546	* 0.4980	* 0.5432	* 0.4811	* 0.4926	* 0.2616
	* 4.9470	* 5.7464	* 5.6334	* 5.1309	* 4.6264	* 5.2589	* 5.1377	* 8.7854
11	* 0.4772	* 0.5445	* 0.4968	* 0.5137	* 0.4540	* 0.4855	* 0.4410	* 0.2258
	* 5.3470	* 4.6972	* 5.1396	* 4.6295	* 5.1246	* 4.7103	* 5.4891	* 10.0632
12	* 0.5625	* 0.4894	* 0.5424	* 0.4535	* 0.3296	* 0.3676	* 0.2815	*
	* 4.5344	* 5.2092	* 4.6317	* 5.1281	* 5.5961	* 5.1954	* 6.9034	*
13	* 0.4794	* 0.4962	* 0.4807	* 0.4851	* 0.3672	* 0.2293	* 0.1396	*
	* 5.3470	* 5.1852	* 5.2641	* 4.7143	* 5.1995	* 7.1290	* 12.4944	*
14	* 0.5164	* 0.5171	* 0.4922	* 0.4405	* 0.2811	* 0.1357	*	*
	* 4.9826	* 4.9680	* 5.1417	* 5.4947	* 6.9132	* 12.7207	*	*
15	* 0.2795	* 0.2872	* 0.2614	* 0.2255	* F-SUB-Q			
	* 8.3385	* 8.1627	* 8.7916	* 10.0738	* M-SUB-Q			

AT 50% POWER, 75 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.6859	* 0.9016	* 1.2239	* 1.0594	* 1.3410	* 1.1159	* 1.3336	* 0.6630
	* 2.8553	* 2.7562	* 2.1638	* 2.4947	* 1.9710	* 2.3724	* 1.9931	* 3.6297
9	* 0.9016	* 1.1680	* 0.9939	* 1.2809	* 1.0892	* 1.2268	* 1.3400	* 0.6813
	* 2.7562	* 2.2009	* 2.6702	* 2.0704	* 2.4244	* 2.1606	* 1.9803	* 3.5536
10	* 1.2239	* 0.9918	* 1.0928	* 1.1410	* 1.2705	* 1.1680	* 1.2850	* 0.6181
	* 2.1638	* 2.6755	* 2.4162	* 2.3111	* 2.0245	* 2.2367	* 2.0390	* 3.8382
11	* 1.0594	* 1.2781	* 1.1380	* 1.2020	* 1.0632	* 1.1949	* 1.1420	* 0.5455
	* 2.4947	* 2.0743	* 2.3155	* 2.0192	* 2.2085	* 1.9729	* 2.1500	* 4.2933
12	* 1.3410	* 1.0886	* 1.2687	* 1.0622	* 0.7765	* 0.9480	* 0.6657	*
	* 1.9710	* 2.4257	* 2.0266	* 2.2100	* 2.3253	* 2.0622	* 3.0152	*
13	* 1.1159	* 1.2262	* 1.1670	* 1.1938	* 0.9468	* 0.5208	* 0.3299	*
	* 2.3724	* 2.1617	* 2.2388	* 1.9745	* 2.0637	* 3.2208	* 5.4576	*
14	* 1.3336	* 1.3396	* 1.2841	* 1.1410	* 0.6645	* 0.3204	*	*
	* 1.9931	* 1.9810	* 2.0405	* 2.1522	* 3.0197	* 5.5630	*	*
15	* 0.6630	* 0.6811	* 0.6177	* 0.5449	* F-SUB-Q			
	* 3.6297	* 3.5544	* 3.8409	* 4.2976	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 159 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 75 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.8350	* 1.0556	* 1.2594	* 1.2463	* 1.4410	* 1.3579	* 1.4730	* 0.7841
	* 2.4242	* 2.3936	* 2.1596	* 2.1787	* 1.8829	* 1.9964	* 1.8411	* 3.1291
9	* 1.0556	* 1.3131	* 1.1827	* 1.4160	* 1.3051	* 1.4929	* 1.4913	* 0.8084
	* 2.3936	* 2.0291	* 2.3033	* 1.9189	* 2.0765	* 1.8141	* 1.8143	* 3.0515
10	* 1.2594	* 1.1773	* 1.3277	* 1.3437	* 1.4367	* 1.4261	* 1.4575	* 0.7438
	* 2.1596	* 2.3137	* 2.0424	* 2.0167	* 1.8497	* 1.8888	* 1.8477	* 3.2682
11	* 1.2463	* 1.4131	* 1.3399	* 1.3538	* 1.2584	* 1.3386	* 1.3567	* 0.6636
	* 2.1787	* 1.9227	* 2.0208	* 1.8745	* 1.9007	* 1.8191	* 1.8671	* 3.6222
12	* 1.4410	* 1.3046	* 1.4354	* 1.2570	* 0.9473	* 1.0945	* 0.7896	*
	* 1.8829	* 2.0773	* 1.8514	* 1.9014	* 1.9154	* 1.8593	* 2.6151	*
13	* 1.3579	* 1.4923	* 1.4251	* 1.3373	* 1.0933	* 0.6318	* 0.3980	*
	* 1.9964	* 1.8150	* 1.8902	* 1.8207	* 1.8606	* 2.7294	* 4.6629	*
14	* 1.4730	* 1.4907	* 1.4565	* 1.3554	* 0.7882	* 0.3893	*	*
	* 1.8411	* 1.8151	* 1.8490	* 1.8689	* 2.6192	* 4.7186	*	*
15	* 0.7841	* 0.8083	* 0.7432	* 0.6629	* F-SUB-Q			
	* 3.1291	* 3.0521	* 3.2706	* 3.6257	* M-SUB-Q			

AT 50% POWER, 75 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9165	* 1.1419	* 1.3802	* 1.3466	* 1.6044	* 1.4987	* 1.6578	* 0.8366
	* 2.2930	* 2.2863	* 2.0373	* 2.0832	* 1.7446	* 1.8615	* 1.6823	* 3.0145
9	* 1.1419	* 1.4587	* 1.2856	* 1.5655	* 1.4253	* 1.6656	* 1.6808	* 0.8646
	* 2.2863	* 1.8935	* 2.1867	* 1.7931	* 1.9616	* 1.6744	* 1.6574	* 2.9349
10	* 1.3802	* 1.2792	* 1.4581	* 1.4660	* 1.6058	* 1.5874	* 1.6468	* 0.7957
	* 2.0373	* 2.1976	* 1.9236	* 1.9089	* 1.7089	* 1.7504	* 1.6863	* 3.1512
11	* 1.3466	* 1.5620	* 1.4616	* 1.5037	* 1.3821	* 1.5143	* 1.5345	* 0.7154
	* 2.0832	* 1.7970	* 1.9147	* 1.7319	* 1.7809	* 1.6664	* 1.7105	* 3.4795
12	* 1.6044	* 1.4246	* 1.6042	* 1.3806	* 1.0445	* 1.2374	* 0.8485	*
	* 1.7446	* 1.9625	* 1.7105	* 1.7815	* 1.7874	* 1.7106	* 2.5298	*
13	* 1.4987	* 1.6648	* 1.5863	* 1.5128	* 1.2359	* 0.6994	* 0.4268	*
	* 1.8615	* 1.6753	* 1.7517	* 1.6680	* 1.7119	* 2.5841	* 4.5335	*
14	* 1.6578	* 1.6800	* 1.6457	* 1.5330	* 0.8476	* 0.4175	*	*
	* 1.6823	* 1.6582	* 1.6875	* 1.7123	* 2.5319	* 4.5874	*	*
15	* 0.8366	* 0.8644	* 0.7951	* 0.7146	* F-SUB-Q			
	* 3.0145	* 2.9355	* 3.1537	* 3.4830	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 160 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 75 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9661	* 1.1838	* 1.4433	* 1.3920	* 1.6869	* 1.5636	* 1.7515	* 0.8705 *
	* 2.3256	* 2.3159	* 2.0317	* 2.1024	* 1.7287	* 1.8564	* 1.6559	* 3.0144 *
9	* 1.1838	* 1.5248	* 1.3269	* 1.6403	* 1.4753	* 1.7466	* 1.7781	* 0.9033 *
	* 2.3159	* 1.8936	* 2.2063	* 1.7810	* 1.9750	* 1.6612	* 1.6299	* 2.9235 *
10	* 1.4433	* 1.3198	* 1.5082	* 1.5248	* 1.6871	* 1.6629	* 1.7444	* 0.8307 *
	* 2.0317	* 2.2182	* 1.9325	* 1.9072	* 1.6908	* 1.7360	* 1.6541	* 3.1453 *
11	* 1.3920	* 1.6365	* 1.5200	* 1.5734	* 1.4472	* 1.6082	* 1.6343	* 0.7501 *
	* 2.1024	* 1.7852	* 1.9133	* 1.7190	* 1.7831	* 1.6403	* 1.6799	* 3.4607 *
12	* 1.6869	* 1.4746	* 1.6853	* 1.4455	* 1.1098	* 1.3291	* 0.8953	*
	* 1.7287	* 1.9759	* 1.6925	* 1.7837	* 1.7896	* 1.6871	* 2.5212	*
13	* 1.5636	* 1.7457	* 1.6616	* 1.6065	* 1.3275	* 0.7495	* 0.4483	*
	* 1.8564	* 1.6620	* 1.7374	* 1.6419	* 1.6884	* 2.5730	* 4.5609	*
14	* 1.7515	* 1.7772	* 1.7431	* 1.6325	* 0.8944	* 0.4384	*	
	* 1.6559	* 1.6307	* 1.6555	* 1.6818	* 2.5231	* 4.6167	*	
15	* 0.8705	* 0.9031	* 0.8300	* 0.7492	* F-SUB-Q			
	* 3.0144	* 2.9242	* 3.1479	* 3.4644	* M-SUB-Q			

AT 50% POWER, 75 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9952	* 1.2060	* 1.4754	* 1.4159	* 1.7284	* 1.5990	* 1.8021	* 0.8934
	* 2.4167	* 2.3987	* 2.0881	* 2.1806	* 1.7784	* 1.9116	* 1.6940	* 3.0924
9	* 1.2060	* 1.5563	* 1.3467	* 1.6793	* 1.4998	* 1.7904	* 1.8312	* 0.9286
	* 2.3987	* 1.9450	* 2.2835	* 1.8259	* 2.0475	* 1.7060	* 1.6648	* 2.9947
10	* 1.4754	* 1.3393	* 1.5317	* 1.5571	* 1.7296	* 1.7050	* 1.7993	* 0.8558
	* 2.0881	* 2.2963	* 1.9965	* 1.9593	* 1.7268	* 1.7745	* 1.6807	* 3.2131
11	* 1.4159	* 1.6752	* 1.5520	* 1.6090	* 1.4857	* 1.6635	* 1.6943	* 0.7742
	* 2.1806	* 1.8303	* 1.9658	* 1.7671	* 1.8395	* 1.6725	* 1.7065	* 3.5120
12	* 1.7284	* 1.4991	* 1.7276	* 1.4840	* 1.1528	* 1.3868	* 0.9317	*
	* 1.7784	* 2.0485	* 1.7287	* 1.8411	* 1.8497	* 1.7288	* 2.5746	*
13	* 1.5990	* 1.7894	* 1.7035	* 1.6617	* 1.3850	* 0.7859	* 0.4661	*
	* 1.9116	* 1.7070	* 1.7761	* 1.6742	* 1.7303	* 2.6454	* 4.6986	*
14	* 1.8021	* 1.8302	* 1.7978	* 1.6923	* 0.9308	* 0.4555	*	
	* 1.6940	* 1.6659	* 1.6821	* 1.7084	* 2.5766	* 4.7589	*	
15	* 0.8934	* 0.9284	* 0.8550	* 0.7733	* F-SUB-Q			
	* 3.0924	* 2.9954	* 3.2159	* 3.5159	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 161 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 75 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0125	* 1.2268	* 1.5103	* 1.4394	* 1.7717	* 1.6343	* 1.8558	* 0.9056
	* 2.5214	* 2.4885	* 2.1649	* 2.2795	* 1.8455	* 1.9909	* 1.7511	* 3.2480
9	* 1.2268	* 1.5921	* 1.3678	* 1.7221	* 1.5246	* 1.8349	* 1.8865	* 0.9422
	* 2.4885	* 2.0055	* 2.3860	* 1.8878	* 2.1382	* 1.7666	* 1.7129	* 3.1427
10	* 1.5103	* 1.3600	* 1.5579	* 1.5910	* 1.7758	* 1.7479	* 1.8569	* 0.8683
	* 2.1649	* 2.3999	* 2.0737	* 2.0270	* 1.7660	* 1.8331	* 1.7249	* 3.3584
11	* 1.4394	* 1.7178	* 1.5856	* 1.6500	* 1.5246	* 1.7219	* 1.7555	* 0.7879
	* 2.2795	* 1.8928	* 2.0339	* 1.8255	* 1.9005	* 1.7111	* 1.7376	* 3.6439
12	* 1.7717	* 1.5238	* 1.7737	* 1.5228	* 1.1824	* 1.4431	* 0.9534	*
	* 1.8455	* 2.1403	* 1.7680	* 1.9023	* 1.9224	* 1.7828	* 2.6863	*
13	* 1.6343	* 1.8338	* 1.7462	* 1.7199	* 1.4412	* 0.8112	* 0.4770	*
	* 1.9909	* 1.7677	* 1.8349	* 1.7130	* 1.7843	* 2.7635	* 4.9421	*
14	* 1.8558	* 1.8854	* 1.8552	* 1.7533	* 0.9525	* 0.4655	*	*
	* 1.7511	* 1.7142	* 1.7265	* 1.7397	* 2.6883	* 5.0127	*	*
15	* 0.9056	* 0.9419	* 0.8675	* 0.7869	* F-SUB-Q			
	* 3.2480	* 3.1435	* 3.3616	* 3.6481	* M-SUB-Q			

AT 50% POWER, 75 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0256	* 1.2396	* 1.5294	* 1.4521	* 1.7953	* 1.6550	* 1.8874	* 0.9142
	* 2.6845	* 2.6513	* 2.2897	* 2.4314	* 1.9596	* 2.1101	* 1.8469	* 3.4451
9	* 1.2396	* 1.6126	* 1.3795	* 1.7472	* 1.5378	* 1.8618	* 1.9200	* 0.9520
	* 2.6513	* 2.1281	* 2.5339	* 1.9912	* 2.2746	* 1.8709	* 1.8064	* 3.3315
10	* 1.5294	* 1.3714	* 1.5733	* 1.6124	* 1.8037	* 1.7755	* 1.8938	* 0.8788
	* 2.2897	* 2.5490	* 2.1946	* 2.1361	* 1.8572	* 1.9318	* 1.8101	* 3.5590
11	* 1.4521	* 1.7427	* 1.6068	* 1.6816	* 1.5523	* 1.7625	* 1.7981	* 0.7999
	* 2.4314	* 1.9967	* 2.1435	* 1.9167	* 2.0038	* 1.7941	* 1.8214	* 3.8312
12	* 1.7953	* 1.5370	* 1.8014	* 1.5505	* 1.2072	* 1.4858	* 0.9748	*
	* 1.9596	* 2.2768	* 1.8594	* 2.0057	* 2.0248	* 1.8668	* 2.8257	*
13	* 1.6550	* 1.8606	* 1.7736	* 1.7603	* 1.4838	* 0.8343	* 0.4888	*
	* 2.1101	* 1.8722	* 1.9339	* 1.7961	* 1.8684	* 2.9196	* 5.2247	*
14	* 1.8874	* 1.9188	* 1.8919	* 1.7958	* 0.9738	* 0.4764	*	*
	* 1.8469	* 1.8078	* 1.8120	* 1.8237	* 2.8278	* 5.3054	*	*
15	* 0.9142	* 0.9517	* 0.8779	* 0.7989	* F-SUB-Q			
	* 3.4451	* 3.3324	* 3.5631	* 3.8360	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 162 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 75 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0440 *	* 1.2565 *	* 1.5522 *	* 1.4651 *	* 1.8208 *	* 1.6751 *	* 1.9195 *	* 0.9195 *
	* 2.9261 *	* 2.8573 *	* 2.4543 *	* 2.5995 *	* 2.0710 *	* 2.2291 *	* 1.9420 *	* 3.6500 *
9	* 1.2565 *	* 1.6391 *	* 1.3939 *	* 1.7761 *	* 1.5521 *	* 1.8890 *	* 1.9547 *	* 0.9564 *
	* 2.8573 *	* 2.2715 *	* 2.7290 *	* 2.1294 *	* 2.4326 *	* 1.9789 *	* 1.9111 *	* 3.5351 *
10	* 1.5522 *	* 1.3855 *	* 1.5931 *	* 1.6369 *	* 1.8354 *	* 1.8045 *	* 1.9327 *	* 0.8859 *
	* 2.4543 *	* 2.7455 *	* 2.3561 *	* 2.2869 *	* 1.9812 *	* 2.0653 *	* 1.9255 *	* 3.7997 *
11	* 1.4651 *	* 1.7714 *	* 1.6310 *	* 1.7201 *	* 1.5868 *	* 1.8087 *	* 1.8442 *	* 0.8085 *
	* 2.5995 *	* 2.1354 *	* 2.2949 *	* 2.0566 *	* 2.1571 *	* 1.9196 *	* 1.9359 *	* 4.1142 *
12	* 1.8208 *	* 1.5512 *	* 1.8329 *	* 1.5850 *	* 1.2386 *	* 1.5381 *	* 0.9959 *	
	* 2.0710 *	* 2.4339 *	* 1.9837 *	* 2.1592 *	* 2.1851 *	* 1.9987 *	* 3.0504 *	
13	* 1.6751 *	* 1.8876 *	* 1.8023 *	* 1.8063 *	* 1.5360 *	* 0.8633 *	* 0.5025 *	
	* 2.2291 *	* 1.9803 *	* 2.0677 *	* 1.9219 *	* 2.0005 *	* 3.1477 *	* 5.6373 *	
14	* 1.9195 *	* 1.9530 *	* 1.9306 *	* 1.8417 *	* 0.9950 *	* 0.4892 *		
	* 1.9420 *	* 1.9124 *	* 1.9276 *	* 1.9385 *	* 3.0526 *	* 5.7313 *		
15	* 0.9195 *	* 0.9561 *	* 0.8849 *	* 0.8073 *	F-SUB-Q			
	* 3.6499 *	* 3.5362 *	* 3.8036 *	* 4.1196 *	M-SUB-Q			

AT 50% POWER, 75 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0696 *	* 1.2633 *	* 1.5421 *	* 1.4576 *	* 1.8056 *	* 1.6675 *	* 1.9055 *	* 0.9262 *
	* 3.2354 *	* 3.1609 *	* 2.7185 *	* 2.8199 *	* 2.2502 *	* 2.4147 *	* 2.1111 *	* 3.9043 *
9	* 1.2633 *	* 1.6345 *	* 1.3893 *	* 1.7680 *	* 1.5427 *	* 1.8812 *	* 1.9457 *	* 0.9668 *
	* 3.1609 *	* 2.5243 *	* 3.0239 *	* 2.3486 *	* 2.6378 *	* 2.1437 *	* 2.0729 *	* 3.7658 *
10	* 1.5421 *	* 1.3809 *	* 1.5898 *	* 1.6365 *	* 1.8289 *	* 1.8044 *	* 1.9293 *	* 0.8996 *
	* 2.7185 *	* 3.0420 *	* 2.6128 *	* 2.5314 *	* 2.1830 *	* 2.2536 *	* 2.1012 *	* 4.0214 *
11	* 1.4576 *	* 1.7628 *	* 1.6305 *	* 1.7298 *	* 1.6062 *	* 1.8214 *	* 1.8562 *	* 0.8245 *
	* 2.8199 *	* 2.3546 *	* 2.5404 *	* 2.2775 *	* 2.3749 *	* 2.1120 *	* 2.1293 *	* 4.4335 *
12	* 1.8056 *	* 1.5418 *	* 1.8263 *	* 1.6043 *	* 1.2819 *	* 1.5769 *	* 1.0330 *	
	* 2.2503 *	* 2.6391 *	* 2.1857 *	* 2.3773 *	* 2.4259 *	* 2.2158 *	* 3.2977 *	
13	* 1.6675 *	* 1.8797 *	* 1.8019 *	* 1.8188 *	* 1.5747 *	* 0.9095 *	* 0.5268 *	
	* 2.4147 *	* 2.1453 *	* 2.2564 *	* 2.1146 *	* 2.2181 *	* 3.4637 *	* 6.1432 *	
14	* 1.9055 *	* 1.9439 *	* 1.9271 *	* 1.8535 *	* 1.0318 *	* 0.5130 *		
	* 2.1111 *	* 2.0744 *	* 2.1035 *	* 2.1322 *	* 3.3007 *	* 6.2435 *		
15	* 0.9261 *	* 0.9664 *	* 0.8986 *	* 0.8232 *	F-SUB-Q			
	* 3.9043 *	* 3.7670 *	* 4.0256 *	* 4.4394 *	M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 163 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 75 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1476	* 1.3014	* 1.5763	* 1.4730	* 1.8387	* 1.6903	* 1.9464	* 0.9234 *
	* 3.5764	* 3.4998	* 2.8614	* 2.9957	* 2.3684	* 2.5451	* 2.2052	* 4.1598 *
9	* 1.3014	* 1.6811	* 1.4102	* 1.8099	* 1.5637	* 1.9142	* 1.9917	* 0.9632 *
	* 3.4998	* 2.7505	* 3.2050	* 2.4745	* 2.8021	* 2.2563	* 2.1708	* 4.0212 *
10	* 1.5763	* 1.4014	* 1.6201	* 1.6715	* 1.8785	* 1.8426	* 1.9818	* 0.8978 *
	* 2.8614	* 3.2246	* 2.8075	* 2.7038	* 2.3690	* 2.3855	* 2.2086	* 4.3253 *
11	* 1.4730	* 1.8045	* 1.6653	* 1.7966	* 1.6730	* 1.9049	* 1.9244	* 0.8289 *
	* 2.9957	* 2.4810	* 2.7136	* 2.4837	* 2.6098	* 2.3034	* 2.3226	* 4.7698 *
12	* 1.8387	* 1.5619	* 1.8758	* 1.6710	* 1.3859	* 1.6933	* 1.0607	*
	* 2.3684	* 2.8035	* 2.3722	* 2.6123	* 2.6570	* 2.4097	* 3.6766	*
13	* 1.6903	* 1.9125	* 1.8399	* 1.9023	* 1.6910	* 0.9952	* 0.5490	*
	* 2.5451	* 2.2581	* 2.3888	* 2.3062	* 2.4125	* 3.8238	* 6.8233	*
14	* 1.9464	* 1.9897	* 1.9793	* 1.9215	* 1.0596	* 0.5337	*	*
	* 2.2052	* 2.1724	* 2.2111	* 2.3258	* 3.6794	* 6.9479	*	*
15	* 0.9234	* 0.9628	* 0.8965	* 0.8275	* F-SUB-Q			
	* 4.1598	* 4.0225	* 4.3300	* 4.7766	* M-SUB-Q			

AT 50% POWER, 75 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2425	* 1.3325	* 1.5852	* 1.4728	* 1.8418	* 1.6926	* 1.9537	* 0.9222 *
	* 3.6875	* 3.6001	* 3.0716	* 3.2237	* 2.5430	* 2.7312	* 2.3602	* 4.4596 *
9	* 1.3325	* 1.7029	* 1.4156	* 1.8231	* 1.5678	* 1.9205	* 2.0040	* 0.9634 *
	* 3.6001	* 2.8556	* 3.4487	* 2.6596	* 3.0185	* 2.4194	* 2.3236	* 4.3065 *
10	* 1.5852	* 1.4066	* 1.6312	* 1.6862	* 1.9228	* 1.8575	* 2.0031	* 0.9019 *
	* 3.0716	* 3.4703	* 2.9977	* 2.9004	* 2.5055	* 2.5613	* 2.3642	* 4.6328 *
11	* 1.4728	* 1.8176	* 1.6798	* 1.8391	* 1.7268	* 1.9661	* 1.9666	* 0.8374 *
	* 3.2237	* 2.6666	* 2.9115	* 2.6164	* 2.7515	* 2.4272	* 2.4578	* 5.1204 *
12	* 1.8418	* 1.5659	* 1.9199	* 1.7249	* 1.6022	* 1.8121	* 1.0979	*
	* 2.5430	* 3.0200	* 2.5091	* 2.7545	* 2.8215	* 2.5585	* 3.9140	*
13	* 1.6926	* 1.9187	* 1.8545	* 1.9633	* 1.8097	* 1.0999	* 0.5775	*
	* 2.7312	* 2.4215	* 2.5650	* 2.4306	* 2.5613	* 4.0917	* 7.3511	*
14	* 1.9537	* 2.0019	* 2.0003	* 1.9635	* 1.0968	* 0.5610	*	*
	* 2.3602	* 2.3254	* 2.3670	* 2.4617	* 3.9175	* 7.4910	*	*
15	* 0.9222	* 0.9630	* 0.9006	* 0.8360	* F-SUB-Q			
	* 4.4596	* 4.3081	* 4.6380	* 5.1278	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 164 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 75 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2986	* 1.3400	* 1.5674	* 1.4563	* 1.8161	* 1.6749	* 1.9303	* 0.9216
	* 3.7277	* 3.6390	* 2.9899	* 3.1296	* 2.4892	* 2.6843	* 2.3332	* 4.3983
9	* 1.3400	* 1.6942	* 1.4040	* 1.8068	* 1.5539	* 1.9019	* 1.9844	* 0.9640
	* 3.6390	* 2.8680	* 3.3470	* 2.6054	* 2.9497	* 2.3893	* 2.3039	* 4.2408
10	* 1.5674	* 1.3950	* 1.6208	* 1.6781	* 1.9308	* 1.8480	* 1.9918	* 0.9056
	* 2.9899	* 3.3682	* 2.9520	* 2.8446	* 2.5109	* 2.5447	* 2.3588	* 4.5821
11	* 1.4563	* 1.8011	* 1.6716	* 1.8460	* 1.7498	* 1.9857	* 1.9748	* 0.8454
	* 3.1296	* 2.6129	* 2.8557	* 2.6443	* 2.7759	* 2.4488	* 2.4750	* 5.1239
12	* 1.8161	* 1.5520	* 1.9279	* 1.7478	* 1.6908	* 1.8675	* 1.1323	*
	* 2.4892	* 2.9515	* 2.5149	* 2.7790	* 2.8466	* 2.5806	* 3.8849	*
13	* 1.6749	* 1.9000	* 1.8448	* 1.9828	* 1.8651	* 1.1670	* 0.6026	*
	* 2.6843	* 2.3917	* 2.5491	* 2.4524	* 2.5836	* 4.0921	* 7.3092	*
14	* 1.9303	* 1.9821	* 1.9889	* 1.9716	* 1.1310	* 0.5855	*	*
	* 2.3332	* 2.3060	* 2.3621	* 2.4791	* 3.8891	* 7.4468	*	*
15	* 0.9216	* 0.9636	* 0.9044	* 0.8439	* F-SUB-Q			
	* 4.3983	* 4.2428	* 4.5883	* 5.1329	* M-SUB-Q			

AT 50% POWER, 75 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3203	* 1.3502	* 1.5782	* 1.4533	* 1.8262	* 1.6786	* 1.9483	* 0.9075
	* 3.5433	* 3.4490	* 2.8650	* 3.0229	* 2.3846	* 2.5783	* 2.2247	* 4.2921
9	* 1.3502	* 1.7137	* 1.4055	* 1.8235	* 1.5551	* 1.9123	* 2.0064	* 0.9492
	* 3.4490	* 2.7273	* 3.2273	* 2.4945	* 2.8467	* 2.2894	* 2.1977	* 4.1455
10	* 1.5782	* 1.3962	* 1.6278	* 1.6891	* 1.9669	* 1.8620	* 2.0208	* 0.8966
	* 2.8650	* 3.2483	* 2.8422	* 2.7334	* 2.4023	* 2.4410	* 2.2485	* 4.4858
11	* 1.4533	* 1.8177	* 1.6824	* 1.8781	* 1.7782	* 2.0319	* 2.0146	* 0.8378
	* 3.0229	* 2.5018	* 2.7445	* 2.5199	* 2.6712	* 2.3413	* 2.3605	* 5.0087
12	* 1.8262	* 1.5531	* 1.9638	* 1.7763	* 1.7369	* 1.9256	* 1.1344	*
	* 2.3846	* 2.8485	* 2.4064	* 2.6741	* 2.7504	* 2.4693	* 3.7792	*
13	* 1.6786	* 1.9102	* 1.8586	* 2.0288	* 1.9231	* 1.1921	* 0.6070	*
	* 2.5783	* 2.2918	* 2.4455	* 2.3447	* 2.4725	* 3.9584	* 7.0716	*
14	* 1.9483	* 2.0040	* 2.0176	* 2.0112	* 1.1332	* 0.5887	*	*
	* 2.2247	* 2.1998	* 2.2519	* 2.3644	* 3.7827	* 7.2182	*	*
15	* 0.9075	* 0.9488	* 0.8951	* 0.8362	* F-SUB-Q			
	* 4.2921	* 4.1476	* 4.4923	* 5.0181	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 165 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 75 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3124	* 1.3384	* 1.5629	* 1.4349	* 1.8092	* 1.6630	* 1.9365	* 0.8937
	* 3.3026	* 3.2195	* 2.6455	* 2.8127	* 2.2244	* 2.4135	* 2.0764	* 4.0162
9	* 1.3384	* 1.7017	* 1.3896	* 1.8106	* 1.5378	* 1.8976	* 1.9970	* 0.9348
	* 3.2195	* 2.5229	* 2.9887	* 2.3140	* 2.6630	* 2.1433	* 2.0515	* 3.8788
10	* 1.5629	* 1.3811	* 1.6121	* 1.6763	* 1.9649	* 1.8505	* 2.0171	* 0.8859
	* 2.6455	* 3.0082	* 2.6373	* 2.5384	* 2.2367	* 2.2823	* 2.0956	* 4.1888
11	* 1.4349	* 1.8047	* 1.6694	* 1.8799	* 1.7737	* 2.0353	* 2.0173	* 0.8281
	* 2.8127	* 2.3208	* 2.5487	* 2.3388	* 2.4801	* 2.1637	* 2.1812	* 4.6669
12	* 1.8092	* 1.5357	* 1.9618	* 1.7717	* 1.7402	* 1.9363	* 1.1303	*
	* 2.2244	* 2.6646	* 2.2401	* 2.4828	* 2.5490	* 2.2790	* 3.5173	*
13	* 1.6630	* 1.8954	* 1.8469	* 2.0322	* 1.9337	* 1.1952	* 0.6058	*
	* 2.4135	* 2.1456	* 2.2866	* 2.1669	* 2.2820	* 3.6788	* 6.5989	*
14	* 1.9365	* 1.9944	* 2.0137	* 2.0138	* 1.1291	* 0.5870	*	*
	* 2.0764	* 2.0535	* 2.0988	* 2.1849	* 3.5206	* 6.7427	*	*
15	* 0.8937	* 0.9343	* 0.8844	* 0.8264	* F-SUB-Q			
	* 4.0162	* 3.8808	* 4.1949	* 4.6757	* M-SUB-Q			

AT 50% POWER, 75 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2894	* 1.3129	* 1.5320	* 1.4057	* 1.7753	* 1.6333	* 1.9043	* 0.8782
	* 3.0959	* 3.0149	* 2.4478	* 2.6056	* 2.0570	* 2.2308	* 1.9172	* 3.7169
9	* 1.3129	* 1.6707	* 1.3623	* 1.7788	* 1.5081	* 1.8660	* 1.9658	* 0.9203
	* 3.0149	* 2.3285	* 2.7648	* 2.1378	* 2.4664	* 1.9781	* 1.8922	* 3.5823
10	* 1.5320	* 1.3544	* 1.5824	* 1.6473	* 1.9379	* 1.8209	* 1.9887	* 0.8726
	* 2.4478	* 2.7832	* 2.4362	* 2.3427	* 2.0648	* 2.1044	* 1.9296	* 3.8647
11	* 1.4057	* 1.7729	* 1.6405	* 1.8564	* 1.7477	* 2.0100	* 1.9929	* 0.8186
	* 2.6056	* 2.1442	* 2.3523	* 2.1909	* 2.3270	* 2.0243	* 2.0366	* 4.2884
12	* 1.7753	* 1.5061	* 1.9347	* 1.7457	* 1.7187	* 1.9164	* 1.1201	*
	* 2.0570	* 2.4680	* 2.0684	* 2.3296	* 2.3964	* 2.1378	* 3.2902	*
13	* 1.6333	* 1.8638	* 1.8172	* 2.0068	* 1.9137	* 1.1849	* 0.6008	*
	* 2.2308	* 1.9803	* 2.1086	* 2.0275	* 2.1407	* 3.4593	* 6.2052	*
14	* 1.9043	* 1.9631	* 1.9852	* 1.9892	* 1.1188	* 0.5819	*	*
	* 1.9172	* 1.8941	* 1.9327	* 2.0403	* 3.2935	* 6.3421	*	*
15	* 0.8782	* 0.9198	* 0.8711	* 0.8170	* F-SUB-Q			
	* 3.7169	* 3.5842	* 3.8706	* 4.2968	* M-SUB-Q			

CNEI-0400-355
Appendix A, Rev. 0
Page 166 of 312

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

	H	G	F	E	D	C	B	A
8	1.2522	1.2742	1.4817	1.3643	1.7196	1.5877	1.8475	0.8629
	3.1454	3.0677	2.4937	2.6479	2.0953	2.2652	1.9515	3.7494
9	1.2742	1.6174	1.3220	1.7239	1.4639	1.8140	1.9083	0.9047
	3.0677	2.3650	2.8059	2.1742	2.5076	2.0071	1.9230	3.6032
10	1.4817	1.3146	1.5362	1.6004	1.8828	1.7709	1.9321	0.8571
	2.4937	2.8248	2.4704	2.3738	2.0983	2.1311	1.9567	3.8750
11	1.3643	1.7181	1.5937	1.8045	1.7004	1.9544	1.9397	0.8057
	2.6479	2.1808	2.3837	2.2331	2.3669	2.0596	2.0598	4.2945
12	1.7196	1.4619	1.8797	1.6984	1.6744	1.8663	1.1069	
	2.0953	2.5093	2.1020	2.3696	2.4363	2.1746	3.2986	
13	1.5877	1.8117	1.7671	1.9512	1.8636	1.1647	0.5935	
	2.2652	2.0095	2.1355	2.0629	2.1776	3.4926	6.2414	
14	1.8475	1.9056	1.9286	1.9361	1.1055	0.5751		
	1.9515	1.9250	1.9600	2.0637	3.3024	6.3761		
15	0.8629	0.9042	0.8556	0.8040	F-SUB-Q			
	3.7494	3.6053	3.8810	4.3032	M-SUB-Q			

	H	G	F	E	D	C	B	A
8	* 1.2284	* 1.2486	* 1.4603	* 1.3351	* 1.6971	* 1.5605	* 1.8290	* 0.8308
	* 2.9217	* 2.8349	* 2.3210	* 2.4875	* 1.9533	* 2.1214	* 1.8144	* 3.5846
9	* 1.2486	* 1.5974	* 1.2953	* 1.7024	* 1.4343	* 1.7878	* 1.8897	* 0.8708
	* 2.8349	* 2.1906	* 2.6257	* 2.0201	* 2.3535	* 1.8731	* 1.7867	* 3.4524
10	* 1.4603	* 1.2884	* 1.5080	* 1.5738	* 1.8629	* 1.7434	* 1.9148	* 0.8278
	* 2.3210	* 2.6439	* 2.3038	* 2.2115	* 1.9486	* 1.9856	* 1.8125	* 3.7072
11	* 1.3351	* 1.6966	* 1.5671	* 1.7849	* 1.6718	* 1.9358	* 1.9212	* 0.7751
	* 2.4875	* 2.0264	* 2.2210	* 2.0533	* 2.1969	* 1.8946	* 1.8958	* 4.0949
12	* 1.6971	* 1.4323	* 1.8597	* 1.6698	* 1.6479	* 1.8479	* 1.0667	
	* 1.9533	* 2.3551	* 1.9522	* 2.1995	* 2.2730	* 2.0208	* 3.1319	
13	* 1.5605	* 1.7855	* 1.7396	* 1.9326	* 1.8453	* 1.1327	* 0.5711	
	* 2.1214	* 1.8754	* 1.9899	* 1.8977	* 2.0238	* 3.3011	* 5.9825	
14	* 1.8290	* 1.8870	* 1.9112	* 1.9175	* 1.0655	* 0.5523		
	* 1.8144	* 1.7887	* 1.8156	* 1.8994	* 3.1351	* 6.1240		
15	* 0.8308	* 0.8703	* 0.8262	* 0.7734	* F-SUB-Q			
	* 3.5846	* 3.4545	* 3.7132	* 4.1035	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 167 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 75 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1881	* 1.2063	* 1.4099	* 1.2888	* 1.6404	* 1.5092	* 1.7700	* 0.8007
	* 2.7507	* 2.7036	* 2.2215	* 2.3893	* 1.8755	* 2.0375	* 1.7420	* 3.4630
9	* 1.2063	* 1.5452	* 1.2518	* 1.6464	* 1.3855	* 1.7309	* 1.8291	* 0.8395
	* 2.7036	* 2.0824	* 2.5097	* 1.9311	* 2.2599	* 1.7948	* 1.7117	* 3.3328
10	* 1.4099	* 1.2454	* 1.4590	* 1.5225	* 1.8024	* 1.6869	* 1.8533	* 0.7981
	* 2.2215	* 2.5273	* 2.1956	* 2.1087	* 1.8618	* 1.8965	* 1.7312	* 3.5693
11	* 1.2888	* 1.6407	* 1.5159	* 1.7276	* 1.6159	* 1.8726	* 1.8587	* 0.7471
	* 2.3893	* 1.9372	* 2.1178	* 1.9571	* 2.0868	* 1.8003	* 1.7985	* 3.9249
12	* 1.6404	* 1.3835	* 1.7992	* 1.6140	* 1.5942	* 1.7875	* 1.0293	*
	* 1.8755	* 2.2614	* 1.8653	* 2.0892	* 2.1345	* 1.9028	* 2.9776	*
13	* 1.5092	* 1.7286	* 1.6830	* 1.8695	* 1.7849	* 1.0938	* 0.5507	*
	* 2.0375	* 1.7971	* 1.9007	* 1.8033	* 1.9056	* 3.1198	* 5.6629	*
14	* 1.7700	* 1.8264	* 1.8498	* 1.8551	* 1.0282	* 0.5323	*	
	* 1.7420	* 1.7140	* 1.7343	* 1.8021	* 2.9807	* 5.7991	*	
15	* 0.8007	* 0.8390	* 0.7966	* 0.7454	* F-SUB-Q			
	* 3.4630	* 3.3347	* 3.5752	* 3.9333	* M-SUB-Q			

AT 50% POWER, 75 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1300	* 1.1459	* 1.3274	* 1.2242	* 1.5446	* 1.4307	* 1.6645	* 0.7717
	* 2.7037	* 2.6136	* 2.1991	* 2.3550	* 1.8671	* 2.0162	* 1.7392	* 3.3851
9	* 1.1459	* 1.4568	* 1.1904	* 1.5518	* 1.3158	* 1.6388	* 1.7201	* 0.8096
	* 2.6136	* 2.0442	* 2.4597	* 1.9106	* 2.2286	* 1.7761	* 1.7037	* 3.2488
10	* 1.3274	* 1.1844	* 1.3879	* 1.4441	* 1.6961	* 1.5979	* 1.7411	* 0.7672
	* 2.1991	* 2.4769	* 2.1471	* 2.0677	* 1.8228	* 1.8668	* 1.7178	* 3.4659
11	* 1.2242	* 1.5465	* 1.4378	* 1.6282	* 1.5306	* 1.7587	* 1.7457	* 0.7206
	* 2.3550	* 1.9171	* 2.0767	* 1.9119	* 2.0440	* 1.7727	* 1.7664	* 3.7924
12	* 1.5446	* 1.3140	* 1.6931	* 1.5288	* 1.5115	* 1.6798	* 0.9935	*
	* 1.8671	* 2.2300	* 1.8261	* 2.0460	* 2.0958	* 1.8873	* 2.8750	*
13	* 1.4307	* 1.6366	* 1.5943	* 1.7557	* 1.6776	* 1.0464	* 0.5320	*
	* 2.0162	* 1.7783	* 1.8709	* 1.7758	* 1.8900	* 3.0310	* 5.4630	*
14	* 1.6645	* 1.7175	* 1.7378	* 1.7423	* 0.9921	* 0.5151	*	
	* 1.7392	* 1.7061	* 1.7208	* 1.7698	* 2.8787	* 5.5854	*	
15	* 0.7717	* 0.8091	* 0.7658	* 0.7191	* F-SUB-Q			
	* 3.3851	* 3.2508	* 3.4715	* 3.8004	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 168 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 75 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0821	* 1.0964	* 1.2679	* 1.1698	* 1.4696	* 1.3634	* 1.5820	* 0.7230
	* 2.5955	* 2.5455	* 2.1666	* 2.3296	* 1.8578	* 2.0043	* 1.7335	* 3.4224
9	* 1.0964	* 1.3927	* 1.1405	* 1.4816	* 1.2573	* 1.5616	* 1.6338	* 0.7582
	* 2.5455	* 1.9981	* 2.4165	* 1.8839	* 2.2039	* 1.7633	* 1.6956	* 3.2924
10	* 1.2679	* 1.1344	* 1.3308	* 1.3817	* 1.6124	* 1.5230	* 1.6528	* 0.7194
	* 2.1666	* 2.4333	* 2.1021	* 2.0293	* 1.7917	* 1.8439	* 1.7042	* 3.5044
11	* 1.1698	* 1.4765	* 1.3757	* 1.5507	* 1.4598	* 1.6675	* 1.6515	* 0.6730
	* 2.3296	* 1.8902	* 2.0380	* 1.8724	* 1.9870	* 1.7391	* 1.7477	* 3.8223
12	* 1.4696	* 1.2556	* 1.6096	* 1.4585	* 1.4416	* 1.5915	* 0.9264	*
	* 1.8578	* 2.2066	* 1.7948	* 1.9888	* 2.0471	* 1.8531	* 2.8606	*
13	* 1.3634	* 1.5596	* 1.5195	* 1.6647	* 1.5896	* 0.9823	* 0.4976	*
	* 2.0043	* 1.7655	* 1.8480	* 1.7420	* 1.8554	* 3.0293	* 5.4632	*
14	* 1.5820	* 1.6314	* 1.6497	* 1.6483	* 0.9251	* 0.4812	*	*
	* 1.7335	* 1.6979	* 1.7072	* 1.7510	* 2.8641	* 5.5931	*	*
15	* 0.7230	* 0.7578	* 0.7181	* 0.6715	* F-SUB-Q			
	* 3.4224	* 3.2943	* 3.5108	* 3.8303	* M-SUB-Q			

AT 50% POWER, 75 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9893	* 1.0160	* 1.1723	* 1.0873	* 1.3365	* 1.2455	* 1.4266	* 0.6699
	* 2.6863	* 2.5979	* 2.2318	* 2.3964	* 1.9556	* 2.1024	* 1.8417	* 3.5465
9	* 1.0160	* 1.2704	* 1.0539	* 1.3567	* 1.1583	* 1.4168	* 1.4700	* 0.7008
	* 2.5979	* 2.0759	* 2.4926	* 1.9599	* 2.2850	* 1.8602	* 1.8018	* 3.4189
10	* 1.1723	* 1.0469	* 1.2200	* 1.2767	* 1.4598	* 1.3837	* 1.4851	* 0.6627
	* 2.2318	* 2.5091	* 2.1823	* 2.0887	* 1.8748	* 1.9346	* 1.8075	* 3.6400
11	* 1.0873	* 1.3523	* 1.2715	* 1.4059	* 1.3420	* 1.5020	* 1.4853	* 0.6158
	* 2.3964	* 1.9662	* 2.0973	* 1.9423	* 2.0481	* 1.8309	* 1.8408	* 3.9835
12	* 1.3365	* 1.1568	* 1.4574	* 1.3408	* 1.3107	* 1.4348	* 0.8540	*
	* 1.9556	* 2.2879	* 1.8780	* 2.0500	* 2.1190	* 1.9370	* 2.9396	*
13	* 1.2455	* 1.4150	* 1.3807	* 1.4996	* 1.4331	* 0.8946	* 0.4581	*
	* 2.1024	* 1.8624	* 1.9387	* 1.8338	* 1.9392	* 3.1231	* 5.5977	*
14	* 1.4266	* 1.4680	* 1.4824	* 1.4826	* 0.8527	* 0.4426	*	*
	* 1.8417	* 1.8042	* 1.8106	* 1.8442	* 2.9438	* 5.7349	*	*
15	* 0.6699	* 0.7004	* 0.6615	* 0.6145	* F-SUB-Q			
	* 3.5465	* 3.4208	* 3.6464	* 3.9916	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 169 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 75 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.7910	* 0.8446	* 1.1203	* 0.9076	* 1.2144	* 1.0000	* 1.2610	* 0.5665 *
	* 3.2156	* 2.9947	* 2.2509	* 2.7753	* 2.0799	* 2.5345	* 2.0142	* 4.0664 *
9	* 0.8446	* 1.1148	* 0.8703	* 1.1808	* 0.9604	* 1.1352	* 1.2884	* 0.5906 *
	* 2.9947	* 2.2773	* 2.9013	* 2.1603	* 2.6582	* 2.2437	* 1.9891	* 3.9325 *
10	* 1.1203	* 0.8679	* 0.9844	* 1.0613	* 1.2605	* 1.1052	* 1.2803	* 0.5485 *
	* 2.2509	* 2.9090	* 2.6080	* 2.4207	* 2.0692	* 2.3385	* 2.0176	* 4.2455 *
11	* 0.9076	* 1.1768	* 1.0573	* 1.2442	* 1.1054	* 1.3097	* 1.2271	* 0.5067 *
	* 2.7753	* 2.1675	* 2.4299	* 2.1156	* 2.3805	* 2.0094	* 2.1404	* 4.6742 *
12	* 1.2144	* 0.9587	* 1.2584	* 1.1045	* 1.0259	* 1.2303	* 0.7204	*
	* 2.0799	* 2.6625	* 2.0729	* 2.3826	* 2.6005	* 2.1715	* 3.3570	*
13	* 1.0000	* 1.1338	* 1.1030	* 1.3077	* 1.2288	* 0.7309	* 0.3800	*
	* 2.5345	* 2.2463	* 2.3432	* 2.0124	* 2.1741	* 3.6714	* 6.4933	*
14	* 1.2610	* 1.2867	* 1.2782	* 1.2249	* 0.7186	* 0.3676	*	*
	* 2.0142	* 1.9915	* 2.0207	* 2.1443	* 3.3650	* 6.6452	*	*
15	* 0.5665	* 0.5903	* 0.5476	* 0.5057	* F-SUB-Q			
	* 4.0664	* 3.9345	* 4.2516	* 4.6833	* M-SUB-Q			

AT 50% POWER, 75 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.3346	* 0.3634	* 0.4416	* 0.3925	* 0.4723	* 0.4041	* 0.4519	* 0.2356 *
	* 7.3325	* 6.7320	* 5.5243	* 6.2237	* 5.1738	* 6.0793	* 5.4387	* 9.4959 *
9	* 0.3634	* 0.4256	* 0.3772	* 0.4682	* 0.4151	* 0.4324	* 0.4587	* 0.2427 *
	* 6.7321	* 5.7530	* 6.4883	* 5.2643	* 5.9589	* 5.7034	* 5.3888	* 9.2926 *
10	* 0.4416	* 0.3763	* 0.3900	* 0.4374	* 0.4953	* 0.4337	* 0.4547	* 0.2290 *
	* 5.5243	* 6.5036	* 6.3664	* 5.6820	* 5.0730	* 5.7881	* 5.4882	* 9.8616 *
11	* 0.3925	* 0.4668	* 0.4360	* 0.4891	* 0.4386	* 0.4940	* 0.4318	* 0.2065 *
	* 6.2237	* 5.2803	* 5.7004	* 5.1584	* 5.7655	* 5.1340	* 5.8693	* 11.1136 *
12	* 0.4723	* 0.4143	* 0.4944	* 0.4382	* 0.3939	* 0.4395	* 0.2970	*
	* 5.1738	* 5.9694	* 5.0824	* 5.7719	* 6.4995	* 5.8628	* 7.8552	*
13	* 0.4041	* 0.4319	* 0.4329	* 0.4933	* 0.4390	* 0.3083	* 0.1588	*
	* 6.0793	* 5.7094	* 5.7993	* 5.1418	* 5.8697	* 8.4199	* 15.0712	*
14	* 0.4519	* 0.4581	* 0.4540	* 0.4310	* 0.2963	* 0.1561	*	*
	* 5.4387	* 5.3933	* 5.4967	* 5.8799	* 7.8740	* 15.1746	*	*
15	* 0.2356	* 0.2426	* 0.2287	* 0.2061	* F-SUB-Q			
	* 9.4959	* 9.2971	* 9.8751	* 11.1344	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 170 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 125 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.2953	* 0.3847	* 0.4945	* 0.4551	* 0.5345	* 0.4503	* 0.4478	* 0.2469 *
	* 6.3792	* 6.3322	* 5.1652	* 5.6164	* 4.7786	* 5.6481	* 5.2479	* 8.7267 *
9	* 0.3847	* 0.4508	* 0.4243	* 0.5208	* 0.4660	* 0.4616	* 0.4811	* 0.2619 *
	* 6.3322	* 5.4896	* 6.0090	* 4.9046	* 5.4725	* 5.4766	* 5.2343	* 8.5410 *
10	* 0.4945	* 0.4236	* 0.4057	* 0.4713	* 0.5193	* 0.4588	* 0.4704	* 0.2483 *
	* 5.1652	* 6.0193	* 5.9478	* 5.3980	* 4.8662	* 5.5368	* 5.3750	* 9.1568 *
11	* 0.4551	* 0.5201	* 0.4702	* 0.4836	* 0.4307	* 0.4672	* 0.4249	* 0.2178 *
	* 5.6164	* 4.9111	* 5.4107	* 4.8679	* 5.4014	* 4.9530	* 5.7490	* 10.4588 *
12	* 0.5345	* 0.4657	* 0.5186	* 0.4303	* 0.3154	* 0.3552	* 0.2708 *	
	* 4.7786	* 5.4789	* 4.8716	* 5.4049	* 5.8790	* 5.4414	* 7.2548 *	
13	* 0.4503	* 0.4614	* 0.4584	* 0.4668	* 0.3548	* 0.2216	* 0.1366 *	
	* 5.6481	* 5.4793	* 5.5421	* 4.9570	* 5.4455	* 7.4887	* 12.9173 *	
14	* 0.4478	* 0.4809	* 0.4701	* 0.4245	* 0.2704	* 0.1328 *		
	* 5.2479	* 5.2362	* 5.3789	* 5.7546	* 7.2648	* 13.1520 *		
15	* 0.2469	* 0.2618	* 0.2482	* 0.2176	* F-SUB-Q			
	* 8.7267	* 8.5428	* 9.1628	* 10.4690	* M-SUB-Q			

AT 50% POWER, 125 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.6598	* 0.8675	* 1.1775	* 1.0193	* 1.2741	* 1.0579	* 1.2357	* 0.6199 *
	* 3.0167	* 2.8975	* 2.2508	* 2.6011	* 2.0766	* 2.4964	* 2.1076	* 3.7794 *
9	* 0.8675	* 1.1146	* 0.9542	* 1.2342	* 1.0447	* 1.1583	* 1.2598	* 0.6438 *
	* 2.8975	* 2.3148	* 2.7756	* 2.1491	* 2.5345	* 2.2726	* 2.0819	* 3.6907 *
10	* 1.1775	* 0.9524	* 1.0211	* 1.0927	* 1.2252	* 1.1174	* 1.2271	* 0.5942 *
	* 2.2508	* 2.7809	* 2.5476	* 2.4184	* 2.1185	* 2.3536	* 2.1373	* 3.9725 *
11	* 1.0193	* 1.2317	* 1.0900	* 1.1529	* 1.0239	* 1.1469	* 1.0990	* 0.5294 *
	* 2.6011	* 2.1535	* 2.4245	* 2.1118	* 2.3165	* 2.0798	* 2.2547	* 4.4586 *
12	* 1.2741	* 1.0441	* 1.2236	* 1.0229	* 0.7487	* 0.9161	* 0.6438 *	
	* 2.0766	* 2.5359	* 2.1205	* 2.3180	* 2.4438	* 2.1636	* 3.1490 *	
13	* 1.0579	* 1.1577	* 1.1165	* 1.1459	* 0.9151	* 0.5055	* 0.3241 *	
	* 2.4964	* 2.2737	* 2.3557	* 2.0813	* 2.1651	* 3.3688	* 5.6103 *	
14	* 1.2357	* 1.2594	* 1.2263	* 1.0979	* 0.6428	* 0.3148 *		
	* 2.1076	* 2.0827	* 2.1387	* 2.2568	* 3.1536	* 5.7180 *		
15	* 0.6199	* 0.6437	* 0.5939	* 0.5289	* F-SUB-Q			
	* 3.7794	* 3.6919	* 3.9751	* 4.4627	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 171 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 125 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.8169	* 1.0446	* 1.2970	* 1.2325	* 1.4415	* 1.3105	* 1.4484	* 0.7711
	* 2.5356	* 2.4651	* 2.1038	* 2.2136	* 1.8879	* 2.0696	* 1.8679	* 3.1602
9	* 1.0446	* 1.2929	* 1.1549	* 1.4052	* 1.2683	* 1.4460	* 1.4635	* 0.7961
	* 2.4651	* 2.0789	* 2.3610	* 1.9435	* 2.1455	* 1.8751	* 1.8483	* 3.0812
10	* 1.2970	* 1.1508	* 1.2829	* 1.3179	* 1.4084	* 1.3837	* 1.4264	* 0.7345
	* 2.1038	* 2.3705	* 2.1229	* 2.0637	* 1.8940	* 1.9535	* 1.8905	* 3.3067
11	* 1.2325	* 1.4042	* 1.3143	* 1.3269	* 1.2380	* 1.3294	* 1.3356	* 0.6569
	* 2.2136	* 1.9452	* 2.0692	* 1.9243	* 1.9610	* 1.8403	* 1.9170	* 3.6914
12	* 1.4415	* 1.2678	* 1.4071	* 1.2367	* 0.9275	* 1.0917	* 0.7817	*
	* 1.8879	* 2.1463	* 1.8956	* 1.9625	* 1.9924	* 1.9059	* 2.6639	*
13	* 1.3105	* 1.4453	* 1.3828	* 1.3282	* 1.0905	* 0.6250	* 0.3968	*
	* 2.0696	* 1.8759	* 1.9548	* 1.8418	* 1.9073	* 2.7938	* 4.7099	*
14	* 1.4484	* 1.4629	* 1.4254	* 1.3344	* 0.7804	* 0.3881	*	*
	* 1.8679	* 1.8490	* 1.8918	* 1.9187	* 2.6680	* 4.7670	*	*
15	* 0.7711	* 0.7960	* 0.7340	* 0.6562	* F-SUB-Q			
	* 3.1602	* 3.0817	* 3.3089	* 3.6947	* M-SUB-Q			

AT 50% POWER, 125 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9021	* 1.1499	* 1.4587	* 1.3572	* 1.6422	* 1.4667	* 1.6675	* 0.8428
	* 2.3757	* 2.3186	* 1.9356	* 2.0785	* 1.7117	* 1.9094	* 1.6763	* 2.9922
9	* 1.1499	* 1.4610	* 1.2761	* 1.5820	* 1.4028	* 1.6350	* 1.6845	* 0.8711
	* 2.3186	* 1.9096	* 2.2111	* 1.7841	* 2.0036	* 1.7121	* 1.6583	* 2.9134
10	* 1.4587	* 1.2699	* 1.4282	* 1.4615	* 1.5954	* 1.5566	* 1.6418	* 0.7997
	* 1.9356	* 2.2218	* 1.9724	* 1.9236	* 1.7243	* 1.7920	* 1.6945	* 3.1380
11	* 1.3572	* 1.5809	* 1.4573	* 1.4977	* 1.3755	* 1.5262	* 1.5288	* 0.7178
	* 2.0785	* 1.7860	* 1.9292	* 1.7567	* 1.8228	* 1.6599	* 1.7310	* 3.4906
12	* 1.6422	* 1.4023	* 1.5939	* 1.3740	* 1.0262	* 1.2484	* 0.8510	*
	* 1.7117	* 2.0044	* 1.7258	* 1.8237	* 1.8408	* 1.7271	* 2.5348	*
13	* 1.4667	* 1.6343	* 1.5556	* 1.5247	* 1.2470	* 0.6939	* 0.4291	*
	* 1.9094	* 1.7129	* 1.7932	* 1.6613	* 1.7284	* 2.6085	* 4.5172	*
14	* 1.6675	* 1.6839	* 1.6407	* 1.5274	* 0.8502	* 0.4198	*	*
	* 1.6763	* 1.6589	* 1.6957	* 1.7327	* 2.5369	* 4.5706	*	*
15	* 0.8428	* 0.8710	* 0.7991	* 0.7171	* F-SUB-Q			
	* 2.9922	* 2.9139	* 3.1403	* 3.4938	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 172 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 125 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9467	* 1.2035	* 1.5459	* 1.4187	* 1.7438	* 1.5424	* 1.7832	* 0.8869
	* 2.3900	* 2.3249	* 1.9059	* 2.0742	* 1.6793	* 1.8902	* 1.6314	* 2.9630
9	* 1.2035	* 1.5423	* 1.3305	* 1.6724	* 1.4644	* 1.7256	* 1.8018	* 0.9201
	* 2.3249	* 1.8911	* 2.2133	* 1.7576	* 2.0002	* 1.6884	* 1.6132	* 2.8744
10	* 1.5459	* 1.3237	* 1.4889	* 1.5339	* 1.6882	* 1.6391	* 1.7573	* 0.8426
	* 1.9059	* 2.2247	* 1.9735	* 1.9108	* 1.6927	* 1.7713	* 1.6471	* 3.1032
11	* 1.4187	* 1.6712	* 1.5293	* 1.5805	* 1.4478	* 1.6325	* 1.6359	* 0.7579
	* 2.0742	* 1.7615	* 1.9166	* 1.7304	* 1.8116	* 1.6216	* 1.6885	* 3.4446
12	* 1.7438	* 1.4638	* 1.6865	* 1.4461	* 1.0824	* 1.3408	* 0.9017	*
	* 1.6793	* 2.0010	* 1.6943	* 1.8131	* 1.8322	* 1.6873	* 2.5049	*
13	* 1.5424	* 1.7248	* 1.6379	* 1.6308	* 1.3392	* 0.7381	* 0.4518	*
	* 1.8902	* 1.6892	* 1.7726	* 1.6230	* 1.6888	* 2.5782	* 4.5047	*
14	* 1.7832	* 1.8011	* 1.7560	* 1.6343	* 0.9009	* 0.4419	*	*
	* 1.6314	* 1.6138	* 1.6484	* 1.6902	* 2.5067	* 4.5593	*	*
15	* 0.8869	* 0.9199	* 0.8419	* 0.7571	* F-SUB-Q			
	* 2.9630	* 2.8750	* 3.1055	* 3.4479	* M-SUB-Q			

AT 50% POWER, 125 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9794	* 1.2337	* 1.5927	* 1.4517	* 1.7952	* 1.5830	* 1.8455	* 0.9147
	* 2.4686	* 2.3917	* 1.9516	* 2.1370	* 1.7176	* 1.9378	* 1.6576	* 3.0234
9	* 1.2337	* 1.5836	* 1.3577	* 1.7204	* 1.4948	* 1.7732	* 1.8651	* 0.9504
	* 2.3917	* 1.9289	* 2.2884	* 1.8002	* 2.0642	* 1.7281	* 1.6386	* 2.9285
10	* 1.5927	* 1.3531	* 1.5183	* 1.5733	* 1.7361	* 1.6833	* 1.8212	* 0.8712
	* 1.9516	* 2.2978	* 2.0333	* 1.9570	* 1.7223	* 1.8139	* 1.6713	* 3.1593
11	* 1.4517	* 1.7175	* 1.5684	* 1.6299	* 1.4902	* 1.6953	* 1.6979	* 0.7844
	* 2.1370	* 1.8043	* 1.9632	* 1.7707	* 1.8576	* 1.6463	* 1.7100	* 3.4859
12	* 1.7952	* 1.4942	* 1.7343	* 1.4885	* 1.1256	* 1.3995	* 0.9397	*
	* 1.7176	* 2.0651	* 1.7240	* 1.8592	* 1.8869	* 1.7189	* 2.5465	*
13	* 1.5830	* 1.7723	* 1.6819	* 1.6935	* 1.3977	* 0.7743	* 0.4703	*
	* 1.9378	* 1.7291	* 1.8153	* 1.6479	* 1.7204	* 2.6381	* 4.6156	*
14	* 1.8455	* 1.8644	* 1.8197	* 1.6962	* 0.9388	* 0.4597	*	*
	* 1.6576	* 1.6393	* 1.6727	* 1.7117	* 2.5484	* 4.6744	*	*
15	* 0.9147	* 0.9503	* 0.8705	* 0.7835	* F-SUB-Q			
	* 3.0234	* 2.9291	* 3.1618	* 3.4894	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 173 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 125 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0101	* 1.2596	* 1.6368	* 1.4783	* 1.8438	* 1.6180	* 1.9044	* 0.9282 *
	* 2.5649	* 2.4701	* 2.0142	* 2.2339	* 1.7781	* 2.0141	* 1.7063	* 3.1637 *
9	* 1.2596	* 1.6243	* 1.3817	* 1.7664	* 1.5203	* 1.8160	* 1.9252	* 0.9654 *
	* 2.4701	* 1.9829	* 2.3841	* 1.8547	* 2.1582	* 1.7927	* 1.6863	* 3.0613 *
10	* 1.6368	* 1.3782	* 1.5453	* 1.6089	* 1.7820	* 1.7235	* 1.8826	* 0.8842 *
	* 2.0142	* 2.3929	* 2.1077	* 2.0191	* 1.7591	* 1.8710	* 1.7075	* 3.3057 *
11	* 1.4783	* 1.7622	* 1.6037	* 1.6796	* 1.5295	* 1.7578	* 1.7561	* 0.7976 *
	* 2.2339	* 1.8591	* 2.0255	* 1.8170	* 1.9157	* 1.6800	* 1.7400	* 3.6097 *
12	* 1.8438	* 1.5197	* 1.7801	* 1.5277	* 1.1662	* 1.4589	* 0.9610 *	
	* 1.7781	* 2.1591	* 1.7609	* 1.9173	* 1.9594	* 1.7676	* 2.6523 *	
13	* 1.6180	* 1.8150	* 1.7219	* 1.7559	* 1.4570	* 0.8051	* 0.4813 *	
	* 2.0141	* 1.7937	* 1.8727	* 1.6817	* 1.7692	* 2.7506	* 4.8436 *	
14	* 1.9044	* 1.9243	* 1.8810	* 1.7543	* 0.9602	* 0.4698 *		
	* 1.7063	* 1.6871	* 1.7091	* 1.7419	* 2.6542	* 4.9123 *		
15	* 0.9282	* 0.9652	* 0.8834	* 0.7967	* F-SUB-Q			
	* 3.1637	* 3.0620	* 3.3085	* 3.6135	* M-SUB-Q			

AT 50% POWER, 125 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0280	* 1.2729	* 1.6584	* 1.4903	* 1.8674	* 1.6354	* 1.9362	* 0.9362 *
	* 2.7271	* 2.6268	* 2.1237	* 2.3794	* 1.8828	* 2.1337	* 1.7957	* 3.3545 *
9	* 1.2729	* 1.6445	* 1.3933	* 1.7897	* 1.5308	* 1.8379	* 1.9576	* 0.9747 *
	* 2.6268	* 2.0961	* 2.5297	* 1.9548	* 2.2994	* 1.8970	* 1.7751	* 3.2434 *
10	* 1.6584	* 1.3897	* 1.5573	* 1.6274	* 1.8054	* 1.7447	* 1.9169	* 0.8931 *
	* 2.1237	* 2.5371	* 2.2270	* 2.1250	* 1.8484	* 1.9720	* 1.7906	* 3.5046 *
11	* 1.4903	* 1.7854	* 1.6220	* 1.7077	* 1.5522	* 1.7953	* 1.7930	* 0.8070 *
	* 2.3794	* 1.9599	* 2.1319	* 1.9132	* 2.0200	* 1.7610	* 1.8229	* 3.7921 *
12	* 1.8674	* 1.5302	* 1.8033	* 1.5504	* 1.1923	* 1.4971	* 0.9783 *	
	* 1.8828	* 2.3009	* 1.8504	* 2.0217	* 2.0643	* 1.8483	* 2.7890 *	
13	* 1.6354	* 1.8367	* 1.7430	* 1.7932	* 1.4952	* 0.8283	* 0.4908 *	
	* 2.1337	* 1.8982	* 1.9740	* 1.7628	* 1.8501	* 2.9048	* 5.1178 *	
14	* 1.9362	* 1.9566	* 1.9151	* 1.7908	* 0.9775	* 0.4786 *		
	* 1.7957	* 1.7760	* 1.7923	* 1.8250	* 2.7908	* 5.1959 *		
15	* 0.9361	* 0.9744	* 0.8923	* 0.8061	* F-SUB-Q			
	* 3.3545	* 3.2442	* 3.5077	* 3.7963	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 174 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 125 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0375	* 1.2836	* 1.6792	* 1.4996	* 1.8902	* 1.6495	* 1.9651	* 0.9392 *
	* 2.9705	* 2.8211	* 2.2729	* 2.5306	* 1.9882	* 2.2575	* 1.8884	* 3.5586 *
9	* 1.2836	* 1.6644	* 1.4032	* 1.8121	* 1.5393	* 1.8569	* 1.9868	* 0.9763 *
	* 2.8211	* 2.2373	* 2.7236	* 2.0901	* 2.4443	* 2.0053	* 1.8680	* 3.4466 *
10	* 1.6792	* 1.3994	* 1.5692	* 1.6442	* 1.8281	* 1.7635	* 1.9487	* 0.8969 *
	* 2.2729	* 2.7308	* 2.3912	* 2.2751	* 1.9726	* 2.1104	* 1.9055	* 3.7200 *
11	* 1.4996	* 1.8076	* 1.6386	* 1.7344	* 1.5723	* 1.8306	* 1.8272	* 0.8108 *
	* 2.5306	* 2.0956	* 2.2827	* 2.0449	* 2.1754	* 1.8828	* 1.9353	* 4.0748 *
12	* 1.8902	* 1.5387	* 1.8259	* 1.5706	* 1.2085	* 1.5314	* 0.9893	*
	* 1.9882	* 2.4453	* 1.9748	* 2.1773	* 2.2299	* 1.9786	* 3.0125	*
13	* 1.6495	* 1.8557	* 1.7615	* 1.8283	* 1.5293	* 0.8442	* 0.4978	*
	* 2.2575	* 2.0066	* 2.1127	* 1.8849	* 1.9805	* 3.1336	* 5.5244	*
14	* 1.9651	* 1.9858	* 1.9468	* 1.8250	* 0.9885	* 0.4848	*	
	* 1.8884	* 1.8690	* 1.9074	* 1.9376	* 3.0145	* 5.6151	*	
15	* 0.9392	* 0.9760	* 0.8960	* 0.8098	* F-SUB-Q			
	* 3.5586	* 3.4475	* 3.7234	* 4.0795	* M-SUB-Q			

AT 50% POWER, 125 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0421	* 1.2766	* 1.6607	* 1.4873	* 1.8672	* 1.6363	* 1.9459	* 0.9436 *
	* 3.2775	* 3.1223	* 2.4966	* 2.7470	* 2.1657	* 2.4532	* 2.0588	* 3.8188 *
9	* 1.2766	* 1.6479	* 1.3920	* 1.7946	* 1.5242	* 1.8418	* 1.9683	* 0.9843 *
	* 3.1223	* 2.4862	* 2.9784	* 2.2851	* 2.6554	* 2.1790	* 2.0337	* 3.6827 *
10	* 1.6607	* 1.3882	* 1.5561	* 1.6334	* 1.8113	* 1.7520	* 1.9343	* 0.9061 *
	* 2.4966	* 2.9862	* 2.6526	* 2.5166	* 2.1753	* 2.2919	* 2.0664	* 3.9523 *
11	* 1.4873	* 1.7901	* 1.6278	* 1.7247	* 1.5681	* 1.8238	* 1.8202	* 0.8212 *
	* 2.7470	* 2.2920	* 2.5249	* 2.2567	* 2.3942	* 2.0744	* 2.1332	* 4.3706 *
12	* 1.8672	* 1.5235	* 1.8090	* 1.5663	* 1.2202	* 1.5336	* 1.0093	*
	* 2.1657	* 2.6564	* 2.1777	* 2.3962	* 2.4759	* 2.1923	* 3.2587	*
13	* 1.6363	* 1.8405	* 1.7499	* 1.8215	* 1.5315	* 0.8599	* 0.5098	*
	* 2.4532	* 2.1805	* 2.2945	* 2.0767	* 2.1945	* 3.4503	* 6.0198	*
14	* 1.9459	* 1.9672	* 1.9323	* 1.8179	* 1.0082	* 0.4966	*	
	* 2.0588	* 2.0348	* 2.0685	* 2.1357	* 3.2616	* 6.1173	*	
15	* 0.9436	* 0.9840	* 0.9052	* 0.8201	* F-SUB-Q			
	* 3.8188	* 3.6837	* 3.9559	* 4.3757	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 175 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 125 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0538	* 1.2919	* 1.6901	* 1.4973	* 1.8970	* 1.6518	* 1.9824	* 0.9378
	* 3.6294	* 3.4627	* 2.6366	* 2.9312	* 2.2873	* 2.5970	* 2.1549	* 4.0818
9	* 1.2919	* 1.6790	* 1.4049	* 1.8261	* 1.5377	* 1.8648	* 2.0061	* 0.9775
	* 3.4627	* 2.6909	* 3.1710	* 2.4182	* 2.8338	* 2.3039	* 2.1334	* 3.9453
10	* 1.6901	* 1.4010	* 1.5739	* 1.6561	* 1.8433	* 1.7766	* 1.9771	* 0.9005
	* 2.6366	* 3.1795	* 2.8335	* 2.6776	* 2.3734	* 2.4372	* 2.1788	* 4.2624
11	* 1.4973	* 1.8214	* 1.6502	* 1.7647	* 1.5983	* 1.8757	* 1.8686	* 0.8196
	* 2.9312	* 2.4253	* 2.6868	* 2.4736	* 2.6359	* 2.2663	* 2.3279	* 4.7226
12	* 1.8970	* 1.5353	* 1.8408	* 1.5966	* 1.2409	* 1.5854	* 1.0155	*
	* 2.2873	* 2.8348	* 2.3762	* 2.6380	* 2.7195	* 2.3895	* 3.6404	*
13	* 1.6518	* 1.8633	* 1.7742	* 1.8732	* 1.5832	* 0.8801	* 0.5157	*
	* 2.5970	* 2.3056	* 2.4402	* 2.2688	* 2.3920	* 3.8151	* 6.7008	*
14	* 1.9824	* 2.0044	* 1.9749	* 1.8661	* 1.0146	* 0.5015	*	*
	* 2.1549	* 2.1345	* 2.1811	* 2.3309	* 3.6429	* 6.8211	*	*
15	* 0.9378	* 0.9771	* 0.8995	* 0.8184	* F-SUB-Q			
	* 4.0818	* 3.9464	* 4.2665	* 4.7284	* M-SUB-Q			

AT 50% POWER, 125 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0767	* 1.3036	* 1.6965	* 1.4951	* 1.8978	* 1.6506	* 1.9873	* 0.9355
	* 3.7082	* 3.5276	* 2.8054	* 3.1344	* 2.4635	* 2.8008	* 2.3158	* 4.3959
9	* 1.3036	* 1.6917	* 1.4069	* 1.8336	* 1.5386	* 1.8665	* 2.0153	* 0.9766
	* 3.5276	* 2.7916	* 3.3777	* 2.5964	* 3.0571	* 2.4835	* 2.2923	* 4.2442
10	* 1.6965	* 1.4030	* 1.5787	* 1.6641	* 1.8519	* 1.7840	* 1.9914	* 0.9016
	* 2.8054	* 3.3869	* 3.0344	* 2.8818	* 2.4986	* 2.6302	* 2.3421	* 4.5865
11	* 1.4951	* 1.8288	* 1.6581	* 1.7889	* 1.6235	* 1.9075	* 1.8958	* 0.8251
	* 3.1344	* 2.5979	* 2.8921	* 2.5794	* 2.7663	* 2.3887	* 2.4736	* 5.0909
12	* 1.8978	* 1.5362	* 1.8493	* 1.6218	* 1.2775	* 1.6350	* 1.0376	*
	* 2.4635	* 3.0584	* 2.5017	* 2.7687	* 2.8867	* 2.5403	* 3.8808	*
13	* 1.6506	* 1.8649	* 1.7815	* 1.9048	* 1.6329	* 0.9197	* 0.5326	*
	* 2.8008	* 2.4854	* 2.6336	* 2.3917	* 2.5431	* 4.0862	* 7.2258	*
14	* 1.9873	* 2.0134	* 1.9890	* 1.8932	* 1.0366	* 0.5174	*	*
	* 2.3158	* 2.2936	* 2.3446	* 2.4770	* 3.8838	* 7.3619	*	*
15	* 0.9355	* 0.9762	* 0.9006	* 0.8239	* F-SUB-Q			
	* 4.3959	* 4.2455	* 4.5909	* 5.0971	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 176 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 125 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1443	* 1.3130	* 1.6799	* 1.4795	* 1.8706	* 1.6326	* 1.9625	* 0.9352
	* 3.7481	* 3.5677	* 2.7367	* 3.0495	* 2.4028	* 2.7437	* 2.2901	* 4.3218
9	* 1.3130	* 1.6869	* 1.3969	* 1.8177	* 1.5258	* 1.8475	* 1.9958	* 0.9774
	* 3.5677	* 2.7842	* 3.2853	* 2.5332	* 2.9777	* 2.4445	* 2.2718	* 4.1663
10	* 1.6799	* 1.3930	* 1.5699	* 1.6570	* 1.8613	* 1.7743	* 1.9785	* 0.9063
	* 2.7367	* 3.2944	* 2.9686	* 2.8108	* 2.5149	* 2.6059	* 2.3375	* 4.5284
11	* 1.4795	* 1.8126	* 1.6509	* 1.7991	* 1.6465	* 1.9254	* 1.9024	* 0.8333
	* 3.0495	* 2.5347	* 2.8210	* 2.6098	* 2.7962	* 2.4154	* 2.4975	* 5.0842
12	* 1.8706	* 1.5234	* 1.8587	* 1.6448	* 1.3672	* 1.6985	* 1.0738	*
	* 2.4028	* 2.9788	* 2.5185	* 2.7986	* 2.9178	* 2.5664	* 3.8586	*
13	* 1.6326	* 1.8458	* 1.7716	* 1.9229	* 1.6963	* 1.0002	* 0.5595	*
	* 2.7437	* 2.4466	* 2.6098	* 2.4185	* 2.5692	* 4.0932	* 7.1959	*
14	* 1.9625	* 1.9938	* 1.9760	* 1.8997	* 1.0727	* 0.5438	*	*
	* 2.2901	* 2.2733	* 2.3405	* 2.5010	* 3.8622	* 7.3297	*	*
15	* 0.9352	* 0.9770	* 0.9052	* 0.8321	* F-SUB-Q			
	* 4.3218	* 4.1679	* 4.5336	* 5.0917	* M-SUB-Q			

AT 50% POWER, 125 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2276	* 1.3406	* 1.7022	* 1.4804	* 1.8861	* 1.6374	* 1.9848	* 0.9221
	* 3.5604	* 3.3803	* 2.6244	* 2.9511	* 2.3067	* 2.6454	* 2.1890	* 4.2239
9	* 1.3406	* 1.7210	* 1.4049	* 1.8416	* 1.5325	* 1.8590	* 2.0241	* 0.9638
	* 3.3803	* 2.6663	* 3.1729	* 2.4328	* 2.8833	* 2.3516	* 2.1716	* 4.0798
10	* 1.7022	* 1.4009	* 1.5839	* 1.6758	* 1.9151	* 1.7927	* 2.0136	* 0.8962
	* 2.6244	* 3.1818	* 2.8671	* 2.7099	* 2.4117	* 2.5096	* 2.2339	* 4.4388
11	* 1.4804	* 1.8362	* 1.6696	* 1.8511	* 1.7015	* 1.9962	* 1.9557	* 0.8295
	* 2.9511	* 2.4342	* 2.7200	* 2.4876	* 2.6860	* 2.3088	* 2.3803	* 4.9823
12	* 1.8861	* 1.5300	* 1.9124	* 1.7000	* 1.5546	* 1.8247	* 1.0941	*
	* 2.3067	* 2.8846	* 2.4148	* 2.6882	* 2.8203	* 2.4583	* 3.7548	*
13	* 1.6374	* 1.8573	* 1.7898	* 1.9935	* 1.8225	* 1.0938	* 0.5784	*
	* 2.6454	* 2.3538	* 2.5136	* 2.3118	* 2.4610	* 3.9622	* 6.9680	*
14	* 1.9848	* 2.0220	* 2.0109	* 1.9529	* 1.0931	* 0.5612	*	*
	* 2.1890	* 2.1732	* 2.2368	* 2.3836	* 3.7576	* 7.1097	*	*
15	* 0.9221	* 0.9634	* 0.8951	* 0.8281	* F-SUB-Q			
	* 4.2239	* 4.0814	* 4.4440	* 4.9900	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 177 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 125 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2763	* 1.3504	* 1.6987	* 1.4679	* 1.8749	* 1.6260	* 1.9784	* 0.9105 *
	* 3.3263	* 3.1620	* 2.4239	* 2.7459	* 2.1486	* 2.4714	* 2.0394	* 3.9488 *
9	* 1.3504	* 1.7277	* 1.3982	* 1.8398	* 1.5235	* 1.8497	* 2.0232	* 0.9517 *
	* 3.1620	* 2.4531	* 2.9370	* 2.2575	* 2.6928	* 2.1968	* 2.0230	* 3.8148 *
10	* 1.6987	* 1.3942	* 1.5805	* 1.6748	* 1.9390	* 1.7906	* 2.0184	* 0.8882 *
	* 2.4239	* 2.9453	* 2.6590	* 2.5143	* 2.2398	* 2.3420	* 2.0774	* 4.1415 *
11	* 1.4679	* 1.8343	* 1.6684	* 1.8716	* 1.7281	* 2.0294	* 1.9779	* 0.8253 *
	* 2.7459	* 2.2585	* 2.5237	* 2.3147	* 2.5023	* 2.1400	* 2.2055	* 4.6374 *
12	* 1.8749	* 1.5210	* 1.9363	* 1.7266	* 1.6405	* 1.8922	* 1.1107	*
	* 2.1486	* 2.6939	* 2.2428	* 2.5044	* 2.6216	* 2.2736	* 3.5029	*
13	* 1.6260	* 1.8479	* 1.7876	* 2.0266	* 1.8900	* 1.1498	* 0.5932	*
	* 2.4714	* 2.1989	* 2.3458	* 2.1428	* 2.2762	* 3.6898	* 6.5154	*
14	* 1.9784	* 2.0210	* 2.0157	* 1.9749	* 1.1098	* 0.5751	*	*
	* 2.0394	* 2.0244	* 2.0801	* 2.2087	* 3.5054	* 6.6545	*	*
15	* 0.9105	* 0.9513	* 0.8869	* 0.8240	* F-SUB-Q			
	* 3.9488	* 3.8163	* 4.1465	* 4.6447	* M-SUB-Q			

AT 50% POWER, 125 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2783	* 1.3401	* 1.6763	* 1.4446	* 1.8464	* 1.6019	* 1.9517	* 0.8977 *
	* 3.1233	* 2.9632	* 2.2500	* 2.5524	* 1.9942	* 2.2928	* 1.8892	* 3.6662 *
9	* 1.3401	* 1.7121	* 1.3793	* 1.8184	* 1.5028	* 1.8252	* 2.0002	* 0.9403 *
	* 2.9632	* 2.2718	* 2.7277	* 2.0956	* 2.5037	* 2.0356	* 1.8729	* 3.5335 *
10	* 1.6763	* 1.3753	* 1.5631	* 1.6571	* 1.9328	* 1.7717	* 1.9999	* 0.8792 *
	* 2.2500	* 2.7354	* 2.4660	* 2.3295	* 2.0799	* 2.1680	* 1.9194	* 3.8336 *
11	* 1.4446	* 1.8129	* 1.6507	* 1.8635	* 1.7245	* 2.0273	* 1.9714	* 0.8217 *
	* 2.5524	* 2.0978	* 2.3383	* 2.1735	* 2.3536	* 2.0071	* 2.0552	* 4.2757 *
12	* 1.8464	* 1.5002	* 1.9300	* 1.7230	* 1.6550	* 1.9073	* 1.1166	*
	* 1.9942	* 2.5047	* 2.0830	* 2.3556	* 2.4710	* 2.1377	* 3.2844	*
13	* 1.6019	* 1.8233	* 1.7685	* 2.0244	* 1.9050	* 1.1677	* 0.6001	*
	* 2.2928	* 2.0376	* 2.1717	* 2.0099	* 2.1402	* 3.4779	* 6.1405	*
14	* 1.9517	* 1.9979	* 1.9971	* 1.9684	* 1.1156	* 0.5816	*	*
	* 1.8892	* 1.8743	* 1.9221	* 2.0584	* 3.2871	* 6.2733	*	*
15	* 0.8977	* 0.9399	* 0.8779	* 0.8203	* F-SUB-Q			
	* 3.6662	* 3.5350	* 3.8384	* 4.2827	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 178 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 125 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2540 *	* 1.3104 *	* 1.6288 *	* 1.4079 *	* 1.7929 *	* 1.5620 *	* 1.8980 *	* 0.8851 *
	* 3.1839 *	* 3.0222 *	* 2.3020 *	* 2.6039 *	* 2.0407 *	* 2.3376 *	* 1.9304 *	* 3.7106 *
9	* 1.3104 *	* 1.6690 *	* 1.3452 *	* 1.7714 *	* 1.4667 *	* 1.7802 *	* 1.9481 *	* 0.9273 *
	* 3.0222 *	* 2.3167 *	* 2.7806 *	* 2.1399 *	* 2.5554 *	* 2.0739 *	* 1.9123 *	* 3.5667 *
10	* 1.6288 *	* 1.3413 *	* 1.5269 *	* 1.6186 *	* 1.8918 *	* 1.7313 *	* 1.9510 *	* 0.8685 *
	* 2.3020 *	* 2.7887 *	* 2.5116 *	* 2.3709 *	* 2.1217 *	* 2.2049 *	* 1.9547 *	* 3.8608 *
11	* 1.4079 *	* 1.7659 *	* 1.6124 *	* 1.8228 *	* 1.6916 *	* 1.9860 *	* 1.9311 *	* 0.8135 *
	* 2.6039 *	* 2.1462 *	* 2.3801 *	* 2.2232 *	* 2.4038 *	* 2.0506 *	* 2.0840 *	* 4.2981 *
12	* 1.7929 *	* 1.4641 *	* 1.8890 *	* 1.6902 *	* 1.6313 *	* 1.8785 *	* 1.1143 *	
	* 2.0407 *	* 2.5563 *	* 2.1250 *	* 2.4058 *	* 2.5213 *	* 2.1817 *	* 3.3043 *	
13	* 1.5620 *	* 1.7783 *	* 1.7281 *	* 1.9832 *	* 1.8763 *	* 1.1636 *	* 0.6004 *	
	* 2.3376 *	* 2.0760 *	* 2.2088 *	* 2.0535 *	* 2.1843 *	* 3.5225 *	* 6.1973 *	
14	* 1.8980 *	* 1.9458 *	* 1.9481 *	* 1.9280 *	* 1.1132 *	* 0.5821 *		
	* 1.9304 *	* 1.9137 *	* 1.9575 *	* 2.0873 *	* 3.3075 *	* 6.3290 *		
15	* 0.8851 *	* 0.9269 *	* 0.8674 *	* 0.8121 *	* F-SUB-Q			
	* 3.7106 *	* 3.5684 *	* 3.8658 *	* 4.3053 *	* M-SUB-Q			

AT 50% POWER, 125 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2352 *	* 1.2883 *	* 1.6102 *	* 1.3801 *	* 1.7735 *	* 1.5372 *	* 1.8824 *	* 0.8531 *
	* 2.9696 *	* 2.8090 *	* 2.1535 *	* 2.4603 *	* 1.9111 *	* 2.2013 *	* 1.8040 *	* 3.5652 *
9	* 1.2883 *	* 1.6532 *	* 1.3209 *	* 1.7533 *	* 1.4393 *	* 1.7571 *	* 1.9344 *	* 0.8938 *
	* 2.8090 *	* 2.1588 *	* 2.6193 *	* 2.0001 *	* 2.4132 *	* 1.9463 *	* 1.7855 *	* 3.4348 *
10	* 1.6102 *	* 1.3169 *	* 1.5029 *	* 1.5960 *	* 1.8797 *	* 1.7086 *	* 1.9386 *	* 0.8400 *
	* 2.1535 *	* 2.6271 *	* 2.3577 *	* 2.2225 *	* 1.9812 *	* 2.0660 *	* 1.8192 *	* 3.7095 *
11	* 1.3801 *	* 1.7478 *	* 1.5896 *	* 1.8086 *	* 1.6710 *	* 1.9768 *	* 1.9224 *	* 0.7853 *
	* 2.4603 *	* 2.0058 *	* 2.2313 *	* 2.0531 *	* 2.2387 *	* 1.8918 *	* 1.9298 *	* 4.1194 *
12	* 1.7735 *	* 1.4368 *	* 1.8769 *	* 1.6696 *	* 1.6142 *	* 1.8714 *	* 1.0804 *	
	* 1.9111 *	* 2.4143 *	* 1.9841 *	* 2.2406 *	* 2.3653 *	* 2.0348 *	* 3.1479 *	
13	* 1.5372 *	* 1.7551 *	* 1.7053 *	* 1.9739 *	* 1.8691 *	* 1.1399 *	* 0.5819 *	
	* 2.2013 *	* 1.9484 *	* 2.0699 *	* 1.8945 *	* 2.0373 *	* 3.3445 *	* 5.9673 *	
14	* 1.8824 *	* 1.9320 *	* 1.9356 *	* 1.9193 *	* 1.0794 *	* 0.5631 *		
	* 1.8040 *	* 1.7869 *	* 1.8219 *	* 1.9330 *	* 3.1504 *	* 6.1057 *		
15	* 0.8531 *	* 0.8934 *	* 0.8387 *	* 0.7839 *	* F-SUB-Q			
	* 3.5652 *	* 3.4364 *	* 3.7145 *	* 4.1266 *	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 179 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 125 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1958	* 1.2450	* 1.5531	* 1.3318	* 1.7129	* 1.4866	* 1.8202	* 0.8221
	* 2.8174	* 2.6970	* 2.0774	* 2.3803	* 1.8481	* 2.1280	* 1.7438	* 3.4655
9	* 1.2450	* 1.5998	* 1.2755	* 1.6957	* 1.3902	* 1.7014	* 1.8718	* 0.8617
	* 2.6970	* 2.0677	* 2.5251	* 1.9263	* 2.3314	* 1.8771	* 1.7236	* 3.3362
10	* 1.5531	* 1.2722	* 1.4546	* 1.5442	* 1.8204	* 1.6543	* 1.8769	* 0.8105
	* 2.0774	* 2.5326	* 2.2643	* 2.1355	* 1.8983	* 1.9864	* 1.7494	* 3.5937
11	* 1.3318	* 1.6903	* 1.5380	* 1.7515	* 1.6181	* 1.9152	* 1.8631	* 0.7580
	* 2.3803	* 1.9318	* 2.1440	* 1.9698	* 2.1411	* 1.8101	* 1.8406	* 3.9732
12	* 1.7129	* 1.3877	* 1.8177	* 1.6167	* 1.5652	* 1.8151	* 1.0452	*
	* 1.8481	* 2.3344	* 1.9012	* 2.1429	* 2.2335	* 1.9272	* 3.0098	*
13	* 1.4866	* 1.6994	* 1.6511	* 1.9123	* 1.8128	* 1.1041	* 0.5627	*
	* 2.1280	* 1.8791	* 1.9902	* 1.8128	* 1.9296	* 3.1774	* 5.6797	*
14	* 1.8202	* 1.8694	* 1.8740	* 1.8601	* 1.0442	* 0.5443	*	*
	* 1.7438	* 1.7250	* 1.7521	* 1.8437	* 3.0122	* 5.8137	*	*
15	* 0.8221	* 0.8612	* 0.8093	* 0.7566	* F-SUB-Q			
	* 3.4655	* 3.3379	* 3.5985	* 3.9803	* M-SUB-Q			

AT 50% POWER, 125 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1346	* 1.1788	* 1.4530	* 1.2605	* 1.6051	* 1.4063	* 1.7034	* 0.7904
	* 2.7936	* 2.6277	* 2.0820	* 2.3688	* 1.8592	* 2.1224	* 1.7581	* 3.4144
9	* 1.1788	* 1.5042	* 1.2072	* 1.5933	* 1.3170	* 1.6080	* 1.7536	* 0.8286
	* 2.6277	* 2.0494	* 2.5031	* 1.9252	* 2.3128	* 1.8718	* 1.7318	* 3.2793
10	* 1.4530	* 1.2047	* 1.3800	* 1.4603	* 1.7082	* 1.5644	* 1.7582	* 0.7779
	* 2.0820	* 2.5105	* 2.2348	* 2.1145	* 1.8709	* 1.9712	* 1.7532	* 3.5209
11	* 1.2605	* 1.5883	* 1.4544	* 1.6466	* 1.5304	* 1.7944	* 1.7456	* 0.7298
	* 2.3688	* 1.9307	* 2.1230	* 1.9382	* 2.1097	* 1.7933	* 1.8262	* 3.8714
12	* 1.6051	* 1.3147	* 1.7056	* 1.5292	* 1.4826	* 1.7038	* 1.0075	*
	* 1.8592	* 2.3166	* 1.8738	* 2.1115	* 2.2099	* 1.9257	* 2.9259	*
13	* 1.4063	* 1.6061	* 1.5613	* 1.7918	* 1.7017	* 1.0555	* 0.5429	*
	* 2.1224	* 1.8738	* 1.9750	* 1.7960	* 1.9281	* 3.1108	* 5.5238	*
14	* 1.7034	* 1.7514	* 1.7554	* 1.7428	* 1.0063	* 0.5259	*	*
	* 1.7581	* 1.7340	* 1.7559	* 1.8293	* 2.9291	* 5.6458	*	*
15	* 0.7904	* 0.8282	* 0.7768	* 0.7284	* F-SUB-Q			
	* 3.4144	* 3.2810	* 3.5257	* 3.8783	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 180 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 125 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0783	* 1.1175	* 1.3715	* 1.1921	* 1.5145	* 1.3305	* 1.6031	* 0.7338
	* 2.7118	* 2.6009	* 2.0860	* 2.3797	* 1.8744	* 2.1356	* 1.7779	* 3.5008
9	* 1.1175	* 1.4254	* 1.1458	* 1.5075	* 1.2467	* 1.5223	* 1.6515	* 0.7692
	* 2.6009	* 2.0318	* 2.4978	* 1.9259	* 2.3126	* 1.8801	* 1.7465	* 3.3689
10	* 1.3715	* 1.1425	* 1.3125	* 1.3852	* 1.6122	* 1.4811	* 1.6552	* 0.7233
	* 2.0860	* 2.5051	* 2.2175	* 2.1050	* 1.8627	* 1.9710	* 1.7639	* 3.6102
11	* 1.1921	* 1.5028	* 1.3797	* 1.5573	* 1.4501	* 1.6899	* 1.6410	* 0.6766
	* 2.3797	* 1.9319	* 2.1134	* 1.9245	* 2.0792	* 1.7829	* 1.8292	* 3.9520
12	* 1.5145	* 1.2447	* 1.6098	* 1.4490	* 1.4053	* 1.6020	* 0.9330	
	* 1.8744	* 2.3162	* 1.8655	* 2.0810	* 2.1822	* 1.9123	* 2.9483	
13	* 1.3305	* 1.5205	* 1.4782	* 1.6874	* 1.6000	* 0.9843	* 0.5043	
	* 2.1356	* 1.8822	* 1.9748	* 1.7855	* 1.9147	* 3.1455	* 5.5924	
14	* 1.6031	* 1.6493	* 1.6526	* 1.6384	* 0.9320	* 0.4879		
	* 1.7779	* 1.7487	* 1.7666	* 1.8322	* 2.9514	* 5.7234		
15	* 0.7338	* 0.7688	* 0.7221	* 0.6753	* F-SUB-Q			
	* 3.5008	* 3.3706	* 3.6150	* 3.9591	* M-SUB-Q			

AT 50% POWER, 125 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9755	* 1.0188	* 1.2366	* 1.0871	* 1.3496	* 1.2001	* 1.4218	* 0.6674
	* 2.8485	* 2.7054	* 2.2122	* 2.5051	* 2.0218	* 2.2777	* 1.9290	* 3.7100
9	* 1.0188	* 1.2794	* 1.0461	* 1.3564	* 1.1378	* 1.3656	* 1.4618	* 0.6978
	* 2.7054	* 2.1550	* 2.6154	* 2.0481	* 2.4276	* 2.0142	* 1.8944	* 3.5783
10	* 1.2366	* 1.0431	* 1.1903	* 1.2601	* 1.4380	* 1.3312	* 1.4630	* 0.6554
	* 2.2122	* 2.6227	* 2.3361	* 2.2104	* 1.9868	* 2.0995	* 1.9115	* 3.8309
11	* 1.0871	* 1.3523	* 1.2553	* 1.3992	* 1.3149	* 1.4957	* 1.4535	* 0.6097
	* 2.5051	* 2.0542	* 2.2189	* 2.0373	* 2.1828	* 1.9193	* 1.9659	* 4.1999
12	* 1.3496	* 1.1361	* 1.4360	* 1.3139	* 1.2653	* 1.4217	* 0.8455	*
	* 2.0218	* 2.4313	* 1.9897	* 2.1845	* 2.2912	* 2.0413	* 3.0960	*
13	* 1.2001	* 1.3642	* 1.3287	* 1.4936	* 1.4199	* 0.8840	* 0.4574	*
	* 2.2777	* 2.0163	* 2.1035	* 1.9220	* 2.0437	* 3.3035	* 5.8392	*
14	* 1.4218	* 1.4600	* 1.4608	* 1.4513	* 0.8441	* 0.4422	*	
	* 1.9290	* 1.8967	* 1.9143	* 1.9689	* 3.1007	* 5.9800	*	
15	* 0.6674	* 0.6975	* 0.6544	* 0.6086	* F-SUB-Q			
	* 3.7100	* 3.5799	* 3.8359	* 4.2072	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 181 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 125 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.7717	* 0.8297	* 1.1017	* 0.8840	* 1.1600	* 0.9496	* 1.1998	* 0.5487
	* 3.4537	* 3.1960	* 2.3997	* 2.9866	* 2.2809	* 2.7949	* 2.2169	* 4.3871
9	* 0.8297	* 1.0908	* 0.8538	* 1.1533	* 0.9275	* 1.0758	* 1.2235	* 0.5718
	* 3.1960	* 2.4389	* 3.0997	* 2.3172	* 2.8834	* 2.4795	* 2.1930	* 4.2445
10	* 1.1016	* 0.8517	* 0.9490	* 1.0258	* 1.2176	* 1.0532	* 1.2168	* 0.5306
	* 2.3997	* 3.1073	* 2.8327	* 2.6239	* 2.2435	* 2.5813	* 2.2236	* 4.5856
11	* 0.8840	* 1.1497	* 1.0222	* 1.2045	* 1.0620	* 1.2451	* 1.1715	* 0.4912
	* 2.9866	* 2.3245	* 2.6331	* 2.2866	* 2.5949	* 2.2149	* 2.3499	* 5.0480
12	* 1.1600	* 0.9261	* 1.2157	* 1.0613	* 0.9793	* 1.1761	* 0.6932	*
	* 2.2809	* 2.8875	* 2.2469	* 2.5968	* 2.8528	* 2.3803	* 3.6496	*
13	* 0.9496	* 1.0747	* 1.0514	* 1.2435	* 1.1749	* 0.7047	* 0.3724	*
	* 2.7949	* 2.4820	* 2.5859	* 2.2177	* 2.3827	* 3.9912	* 6.9204	*
14	* 1.1998	* 1.2223	* 1.2152	* 1.1698	* 0.6916	* 0.3603	*	*
	* 2.2169	* 2.1945	* 2.2264	* 2.3535	* 3.6575	* 7.0813	*	*
15	* 0.5487	* 0.5716	* 0.5298	* 0.4903	* F-SUB-Q			
	* 4.3871	* 4.2463	* 4.5911	* 5.0563	* M-SUB-Q			

AT 50% POWER, 125 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.3267	* 0.3547	* 0.4318	* 0.3795	* 0.4528	* 0.3837	* 0.4312	* 0.2263
	* 7.8850	* 7.2446	* 5.9370	* 6.7610	* 5.6668	* 6.7205	* 5.9848	*10.3529
9	* 0.3547	* 0.4160	* 0.3671	* 0.4539	* 0.3988	* 0.4099	* 0.4373	* 0.2330
	* 7.2446	* 6.1836	* 7.0008	* 5.7031	* 6.5122	* 6.3138	* 5.9344	*10.1345
10	* 0.4318	* 0.3663	* 0.3764	* 0.4210	* 0.4749	* 0.4128	* 0.4340	* 0.2199
	* 5.9370	* 7.0162	* 6.9238	* 6.1979	* 5.5453	* 6.3827	* 6.0385	*10.7531
11	* 0.3795	* 0.4527	* 0.4198	* 0.4711	* 0.4201	* 0.4716	* 0.4139	* 0.1990
	* 6.7610	* 5.7191	* 6.2165	* 5.6226	* 6.3228	* 5.6503	* 6.4352	*12.0993
12	* 0.4528	* 0.3982	* 0.4741	* 0.4198	* 0.3765	* 0.4216	* 0.2839	*
	* 5.6668	* 6.5223	* 5.5543	* 6.3288	* 7.1383	* 6.4237	* 8.6138	*
13	* 0.3837	* 0.4096	* 0.4122	* 0.4710	* 0.4211	* 0.2957	* 0.1545	*
	* 6.7205	* 6.3195	* 6.3934	* 5.6574	* 6.4301	* 9.2223	*16.2002	*
14	* 0.4312	* 0.4369	* 0.4335	* 0.4133	* 0.2832	* 0.1520	*	*
	* 5.9848	* 5.9384	* 6.0463	* 6.4448	* 8.6325	*16.3115	*	*
15	* 0.2263	* 0.2329	* 0.2196	* 0.1986	* F-SUB-Q			
	*10.3529	*10.1385	*10.7653	*12.1182	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 182 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 250 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.2879	* 0.3709	* 0.4758	* 0.4423	* 0.5130	* 0.4136	* 0.3620	* 0.1878 *
	* 6.1355	* 6.0599	* 4.8358	* 5.1944	* 4.5733	* 5.3228	* 5.0356	* 8.1875 *
9	* 0.3709	* 0.4225	* 0.3997	* 0.5030	* 0.4520	* 0.4362	* 0.4379	* 0.2369 *
	* 6.0599	* 5.2587	* 5.5124	* 4.6280	* 5.0714	* 5.1696	* 5.0237	* 8.0220 *
10	* 0.4758	* 0.3993	* 0.3491	* 0.4502	* 0.5054	* 0.4483	* 0.4520	* 0.2346 *
	* 4.8358	* 5.5225	* 5.4689	* 5.0116	* 4.6418	* 5.1447	* 5.1319	* 8.5482 *
11	* 0.4423	* 0.5026	* 0.4495	* 0.4664	* 0.4245	* 0.4717	* 0.4289	* 0.2211 *
	* 5.1944	* 4.6334	* 5.0210	* 4.7970	* 5.1720	* 4.9211	* 5.6235	* 9.7311 *
12	* 0.5130	* 0.4517	* 0.5050	* 0.4243	* 0.3155	* 0.3696	* 0.2802	*
	* 4.5733	* 5.0772	* 4.6473	* 5.1752	* 5.5972	* 5.3386	* 7.1200	*
13	* 0.4136	* 0.4359	* 0.4480	* 0.4714	* 0.3693	* 0.2346	* 0.1501	*
	* 5.3228	* 5.1713	* 5.1486	* 4.9241	* 5.3418	* 7.2885	* 12.1316	*
14	* 0.3620	* 0.4377	* 0.4518	* 0.4286	* 0.2798	* 0.1460	*	*
	* 5.0356	* 5.0250	* 5.1346	* 5.6274	* 7.1285	* 12.3453	*	*
15	* 0.1878	* 0.2368	* 0.2345	* 0.2210	* F-SUB-Q			
	* 8.1875	* 8.0231	* 8.5523	* 9.7384	* M-SUB-Q			

AT 50% POWER, 250 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.6311	* 0.8258	* 1.1149	* 0.9779	* 1.2008	* 0.9472	* 0.8987	* 0.4512 *
	* 3.0112	* 2.8364	* 2.1586	* 2.4565	* 2.0444	* 2.4284	* 2.0934	* 3.6260 *
9	* 0.8258	* 1.0149	* 0.8878	* 1.1752	* 0.9965	* 1.0409	* 1.1091	* 0.5649 *
	* 2.8364	* 2.2793	* 2.5949	* 2.0627	* 2.4054	* 2.2165	* 2.0721	* 3.5476 *
10	* 1.1149	* 0.8870	* 0.8123	* 1.0216	* 1.1879	* 1.0654	* 1.1428	* 0.5574 *
	* 2.1586	* 2.6000	* 2.4297	* 2.3007	* 2.0762	* 2.2619	* 2.1177	* 3.7955 *
11	* 0.9779	* 1.1741	* 1.0199	* 1.0895	* 0.9975	* 1.1234	* 1.0817	* 0.5265 *
	* 2.4565	* 2.0663	* 2.3052	* 2.1170	* 2.2718	* 2.1377	* 2.3085	* 4.2569 *
12	* 1.2008	* 0.9958	* 1.1870	* 0.9969	* 0.7381	* 0.9241	* 0.6518	*
	* 2.0444	* 2.4081	* 2.0786	* 2.2733	* 2.4163	* 2.2049	* 3.1627	*
13	* 0.9472	* 1.0403	* 1.0648	* 1.1227	* 0.9233	* 0.5233	* 0.3484	*
	* 2.4284	* 2.2171	* 2.2633	* 2.1390	* 2.2062	* 3.3643	* 5.3894	*
14	* 0.8987	* 1.1087	* 1.1423	* 1.0810	* 0.6509	* 0.3386	*	*
	* 2.0934	* 2.0726	* 2.1187	* 2.3101	* 3.1668	* 5.4898	*	*
15	* 0.4512	* 0.5647	* 0.5571	* 0.5262	* F-SUB-Q			
	* 3.6260	* 3.5484	* 3.7973	* 4.2599	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 183 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 250 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.7991	* 1.0298	* 1.3560	* 1.2183	* 1.4626	* 1.1950	* 1.1764	* 0.6090
	* 2.5467	* 2.3815	* 1.8562	* 2.0571	* 1.7489	* 2.0163	* 1.7593	* 2.9808
9	* 1.0298	* 1.2390	* 1.1118	* 1.4155	* 1.2344	* 1.3135	* 1.3831	* 0.7232
	* 2.3815	* 1.9629	* 2.1764	* 1.7993	* 2.0263	* 1.8240	* 1.7465	* 2.9035
10	* 1.3560	* 1.1101	* 1.0572	* 1.2723	* 1.4098	* 1.3291	* 1.4101	* 0.7049
	* 1.8562	* 2.1812	* 2.0076	* 1.9352	* 1.8139	* 1.8810	* 1.7898	* 3.1105
11	* 1.2183	* 1.4150	* 1.2700	* 1.3219	* 1.2372	* 1.3793	* 1.3369	* 0.6657
	* 2.0571	* 1.8018	* 1.9394	* 1.8544	* 1.9035	* 1.7982	* 1.9321	* 3.4906
12	* 1.4626	* 1.2335	* 1.4085	* 1.2364	* 0.9294	* 1.1405	* 0.8100	
	* 1.7489	* 2.0286	* 1.8169	* 1.9048	* 1.9815	* 1.8720	* 2.6226	
13	* 1.1950	* 1.3130	* 1.3285	* 1.3784	* 1.1395	* 0.6602	* 0.4309	
	* 2.0163	* 1.8245	* 1.8821	* 1.7993	* 1.8732	* 2.7487	* 4.4852	
14	* 1.1764	* 1.3826	* 1.4094	* 1.3360	* 0.8092	* 0.4216		
	* 1.7593	* 1.7469	* 1.7907	* 1.9334	* 2.6248	* 4.5386		
15	* 0.6090	* 0.7229	* 0.7045	* 0.6652	* F-SUB-Q			
	* 2.9808	* 2.9038	* 3.1121	* 3.4930	* M-SUB-Q			

AT 50% POWER, 250 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.8998	* 1.1685	* 1.5847	* 1.3754	* 1.6985	* 1.3679	* 1.4862	* 0.7562
	* 2.3937	* 2.2271	* 1.6804	* 1.9176	* 1.5832	* 1.8677	* 1.5778	* 2.8044
9	* 1.1685	* 1.4612	* 1.2735	* 1.6415	* 1.3929	* 1.5143	* 1.6460	* 0.8163
	* 2.2271	* 1.7800	* 2.0289	* 1.6329	* 1.8900	* 1.6763	* 1.5670	* 2.7328
10	* 1.5847	* 1.2712	* 1.2822	* 1.4552	* 1.6343	* 1.5044	* 1.6518	* 0.7896
	* 1.6804	* 2.0336	* 1.8692	* 1.7958	* 1.6492	* 1.7408	* 1.6053	* 2.9455
11	* 1.3754	* 1.6395	* 1.4520	* 1.5356	* 1.3990	* 1.5935	* 1.5468	* 0.7359
	* 1.9176	* 1.6352	* 1.7998	* 1.6808	* 1.7656	* 1.6218	* 1.7337	* 3.2969
12	* 1.6985	* 1.3916	* 1.6326	* 1.3979	* 1.0393	* 1.3103	* 0.8873	
	* 1.5832	* 1.8922	* 1.6521	* 1.7670	* 1.8427	* 1.6864	* 2.4882	
13	* 1.3679	* 1.5137	* 1.5036	* 1.5925	* 1.3091	* 0.7338	* 0.4671	
	* 1.8677	* 1.6768	* 1.7416	* 1.6227	* 1.6875	* 2.5693	* 4.2943	
14	* 1.4862	* 1.6454	* 1.6511	* 1.5456	* 0.8861	* 0.4573		
	* 1.5778	* 1.5674	* 1.6061	* 1.7350	* 2.4913	* 4.3423		
15	* 0.7562	* 0.8160	* 0.7891	* 0.7354	* F-SUB-Q			
	* 2.8044	* 2.7330	* 2.9470	* 3.2992	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 184 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 250 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9596	* 1.2482	* 1.7163	* 1.4608	* 1.8247	* 1.4650	* 1.7543	* 0.8660
	* 2.4148	* 2.2289	* 1.6541	* 1.9133	* 1.5601	* 1.8666	* 1.5500	* 2.7962
9	* 1.2482	* 1.5991	* 1.3709	* 1.7720	* 1.4772	* 1.6341	* 1.8012	* 0.9025
	* 2.2289	* 1.7590	* 2.0275	* 1.6046	* 1.8868	* 1.6704	* 1.5397	* 2.7135
10	* 1.7163	* 1.3682	* 1.4504	* 1.5622	* 1.7618	* 1.5904	* 1.7837	* 0.8487
	* 1.6541	* 2.0324	* 1.8778	* 1.7864	* 1.6139	* 1.7338	* 1.5731	* 2.9321
11	* 1.4608	* 1.7697	* 1.5585	* 1.6559	* 1.4849	* 1.6980	* 1.6548	* 0.7800
	* 1.9133	* 1.6082	* 1.7905	* 1.6516	* 1.7632	* 1.6005	* 1.6890	* 3.2556
12	* 1.8247	* 1.4758	* 1.7598	* 1.4836	* 1.0998	* 1.3952	* 0.9351	*
	* 1.5601	* 1.8890	* 1.6157	* 1.7645	* 1.8487	* 1.6601	* 2.4766	*
13	* 1.4650	* 1.6336	* 1.5895	* 1.6969	* 1.3940	* 0.7733	* 0.4884	*
	* 1.8666	* 1.6709	* 1.7346	* 1.6014	* 1.6611	* 2.5578	* 4.3054	*
14	* 1.7543	* 1.8006	* 1.7829	* 1.6536	* 0.9340	* 0.4781	*	*
	* 1.5500	* 1.5401	* 1.5739	* 1.6903	* 2.4792	* 4.3546	*	*
15	* 0.8660	* 0.9025	* 0.8483	* 0.7795	* F-SUB-Q			
	* 2.7962	* 2.7138	* 2.9336	* 3.2578	* M-SUB-Q			

AT 50% POWER, 250 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9958	* 1.2938	* 1.7877	* 1.5066	* 1.8895	* 1.5185	* 1.8671	* 0.9247
	* 2.5015	* 2.2931	* 1.6923	* 1.9613	* 1.5915	* 1.9215	* 1.5837	* 2.8651
9	* 1.2938	* 1.6728	* 1.4243	* 1.8453	* 1.5212	* 1.7023	* 1.8850	* 0.9623
	* 2.2931	* 1.8035	* 2.0862	* 1.6369	* 1.9329	* 1.7176	* 1.5723	* 2.7741
10	* 1.7877	* 1.4213	* 1.5180	* 1.6190	* 1.8276	* 1.6319	* 1.8505	* 0.8875
	* 1.6923	* 2.0914	* 1.9388	* 1.8307	* 1.6314	* 1.7725	* 1.5967	* 2.9884
11	* 1.5066	* 1.8413	* 1.6149	* 1.7272	* 1.5301	* 1.7475	* 1.7057	* 0.8052
	* 1.9613	* 1.6404	* 1.8346	* 1.6910	* 1.8201	* 1.6439	* 1.7038	* 3.2775
12	* 1.8895	* 1.5197	* 1.8254	* 1.5286	* 1.1331	* 1.4348	* 0.9632	*
	* 1.5915	* 1.9350	* 1.6332	* 1.8214	* 1.9197	* 1.7097	* 2.5421	*
13	* 1.5185	* 1.7017	* 1.6309	* 1.7463	* 1.4335	* 0.7944	* 0.5012	*
	* 1.9215	* 1.7181	* 1.7735	* 1.6449	* 1.7108	* 2.6422	* 4.4494	*
14	* 1.8671	* 1.8845	* 1.8496	* 1.7045	* 0.9626	* 0.4904	*	*
	* 1.5837	* 1.5727	* 1.5975	* 1.7050	* 2.5435	* 4.5023	*	*
15	* 0.9247	* 0.9622	* 0.8870	* 0.8046	* F-SUB-Q			
	* 2.8651	* 2.7744	* 2.9900	* 3.2797	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 185 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 250 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0149 *	* 1.3224 *	* 1.8425 *	* 1.5359 *	* 1.9402 *	* 1.5562 *	* 1.9366 *	* 0.9467 *
	* 2.6095 *	* 2.3691 *	* 1.7253 *	* 2.0215 *	* 1.6271 *	* 1.9783 *	* 1.6193 *	* 2.9802 *
9	* 1.3224 *	* 1.7270 *	* 1.4567 *	* 1.9031 *	* 1.5494 *	* 1.7439 *	* 1.9499 *	* 0.9847 *
	* 2.3691 *	* 1.8467 *	* 2.1455 *	* 1.6648 *	* 1.9936 *	* 1.7624 *	* 1.6033 *	* 2.8801 *
10	* 1.8425 *	* 1.4536 *	* 1.5531 *	* 1.6566 *	* 1.8815 *	* 1.6601 *	* 1.9027 *	* 0.8985 *
	* 1.7253 *	* 2.1508 *	* 1.9984 *	* 1.8773 *	* 1.6670 *	* 1.8252 *	* 1.6264 *	* 3.0868 *
11	* 1.5359 *	* 1.8988 *	* 1.6523 *	* 1.7814 *	* 1.5593 *	* 1.7884 *	* 1.7479 *	* 0.8128 *
	* 2.0215 *	* 1.6686 *	* 1.8818 *	* 1.7431 *	* 1.8946 *	* 1.7006 *	* 1.7499 *	* 3.4125 *
12	* 1.9402 *	* 1.5478 *	* 1.8788 *	* 1.5577 *	* 1.1488 *	* 1.4671 *	* 0.9707 *	
	* 1.6271 *	* 1.9959 *	* 1.6690 *	* 1.8960 *	* 2.0166 *	* 1.7785 *	* 2.6811 *	
13	* 1.5562 *	* 1.7432 *	* 1.6589 *	* 1.7872 *	* 1.4659 *	* 0.8038 *	* 0.5040 *	
	* 1.9783 *	* 1.7630 *	* 1.8262 *	* 1.7016 *	* 1.7796 *	* 2.7822 *	* 4.7115 *	
14	* 1.9366 *	* 1.9494 *	* 1.9017 *	* 1.7467 *	* 0.9697 *	* 0.4924 *		
	* 1.6193 *	* 1.6037 *	* 1.6273 *	* 1.7512 *	* 2.6835 *	* 4.7736 *		
15	* 0.9467 *	* 0.9846 *	* 0.8980 *	* 0.8122 *	* F-SUB-Q			
	* 2.9802 *	* 2.8804 *	* 3.0884 *	* 3.4148 *	* M-SUB-Q			

AT 50% POWER, 250 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0258 *	* 1.3337 *	* 1.8640 *	* 1.5439 *	* 1.9570 *	* 1.5658 *	* 1.9606 *	* 0.9534 *
	* 2.7898 *	* 2.5137 *	* 1.8203 *	* 2.1446 *	* 1.7187 *	* 2.0834 *	* 1.6910 *	* 3.1239 *
9	* 1.3337 *	* 1.7485 *	* 1.4673 *	* 1.9248 *	* 1.5561 *	* 1.7545 *	* 1.9725 *	* 0.9918 *
	* 2.5137 *	* 1.9478 *	* 2.2727 *	* 1.7540 *	* 2.1173 *	* 1.8578 *	* 1.6781 *	* 3.0212 *
10	* 1.8640 *	* 1.4641 *	* 1.5614 *	* 1.6685 *	* 1.9020 *	* 1.6649 *	* 1.9202 *	* 0.9020 *
	* 1.8203 *	* 2.2785 *	* 2.1177 *	* 1.9881 *	* 1.7605 *	* 1.9362 *	* 1.7135 *	* 3.2629 *
11	* 1.5439 *	* 1.9203 *	* 1.6640 *	* 1.8028 *	* 1.5705 *	* 1.8026 *	* 1.7627 *	* 0.8143 *
	* 2.1446 *	* 1.7581 *	* 1.9930 *	* 1.8455 *	* 2.0160 *	* 1.8030 *	* 1.8536 *	* 3.6303 *
12	* 1.9570 *	* 1.5543 *	* 1.8992 *	* 1.5689 *	* 1.1568 *	* 1.4808 *	* 0.9741 *	
	* 1.7187 *	* 2.1198 *	* 1.7630 *	* 2.0174 *	* 2.1463 *	* 1.8826 *	* 2.8497 *	
13	* 1.5658 *	* 1.7538 *	* 1.6636 *	* 1.8014 *	* 1.4795 *	* 0.8103 *	* 0.5057 *	
	* 2.0834 *	* 1.8584 *	* 1.9374 *	* 1.8041 *	* 1.8838 *	* 2.9693 *	* 5.0295 *	
14	* 1.9606 *	* 1.9719 *	* 1.9192 *	* 1.7614 *	* 0.9732 *	* 0.4937 *		
	* 1.6910 *	* 1.6786 *	* 1.7144 *	* 1.8550 *	* 2.8520 *	* 5.1010 *		
15	* 0.9534 *	* 0.9917 *	* 0.9016 *	* 0.8138 *	* F-SUB-Q			
	* 3.1239 *	* 3.0216 *	* 3.2646 *	* 3.6328 *	* M-SUB-Q			

CNEI-0400-355
Appendix A, Rev. 0
Page 186 of 312

F-SUB-O & M-SUB-O VALUES (F-SUB-O OP MARGIN) - NORMAL OPERATION

	H	G	F	E	D	C	B	A
8	* 1.0380	* 1.3398	* 1.8786	* 1.5445	* 1.9670	* 1.5659	* 1.9731	* 0.9501
	* 3.0480	* 2.7240	* 1.9604	* 2.3235	* 1.8518	* 2.2464	* 1.8092	* 3.3710
9	* 1.3398	* 1.7645	* 1.4702	* 1.9391	* 1.5560	* 1.7564	* 1.9845	* 0.9861
	* 2.7240	* 2.0973	* 2.4614	* 1.8866	* 2.2954	* 2.0017	* 1.7973	* 3.2688
10	* 1.8786	* 1.4670	* 1.5634	* 1.6730	* 1.9163	* 1.6642	* 1.9305	* 0.8972
	* 1.9604	* 2.4676	* 2.2945	* 2.1504	* 1.8948	* 2.0954	* 1.8420	* 3.5383
11	* 1.5445	* 1.9345	* 1.6685	* 1.8187	* 1.5721	* 1.8138	* 1.7730	* 0.8085
	* 2.3235	* 1.8910	* 2.1558	* 1.9894	* 2.1871	* 1.9478	* 2.0000	* 3.9574
12	* 1.9670	* 1.5542	* 1.9134	* 1.5707	* 1.1666	* 1.4944	* 0.9716	*
	* 1.8518	* 2.2981	* 1.8976	* 2.1886	* 2.3364	* 2.0326	* 3.1050	*
13	* 1.5659	* 1.7556	* 1.6628	* 1.8125	* 1.4931	* 0.8183	* 0.5058	*
	* 2.2464	* 2.0024	* 2.0968	* 1.9490	* 2.0338	* 3.2298	* 5.4742	*
14	* 1.9731	* 1.9839	* 1.9294	* 1.7717	* 0.9709	* 0.4931	*	*
	* 1.8092	* 1.7978	* 1.8430	* 2.0014	* 3.1070	* 5.5582	*	*
15	* 0.9501	* 0.9860	* 0.8968	* 0.8079	* F-SUB-Q			
	* 3.3710	* 3.2691	* 3.5402	* 3.9603	* M-SUB-Q			

	H	G	F	E	D	C	B	A
8	* 1.0482	* 1.3330	* 1.8477	* 1.5216	* 1.9297	* 1.5398	* 1.9356	* 0.9470
	* 3.3528	* 3.0256	* 2.1897	* 2.5779	* 2.0637	* 2.5031	* 2.0203	* 3.7021
9	* 1.3330	* 1.7377	* 1.4519	* 1.9050	* 1.5334	* 1.7263	* 1.9468	* 0.9863
	* 3.0256	* 2.3518	* 2.7362	* 2.1035	* 2.5458	* 2.2295	* 2.0079	* 3.5764
10	* 1.8477	* 1.4487	* 1.5402	* 1.6492	* 1.8833	* 1.6359	* 1.8938	* 0.8995
	* 2.1897	* 2.7430	* 2.5574	* 2.3895	* 2.1084	* 2.3267	* 2.0492	* 3.8470
11	* 1.5216	* 1.9004	* 1.6450	* 1.7903	* 1.5655	* 1.7841	* 1.7424	* 0.8093
	* 2.5779	* 2.1083	* 2.3950	* 2.2007	* 2.4182	* 2.1593	* 2.2177	* 4.2875
12	* 1.9297	* 1.5316	* 1.8805	* 1.5640	* 1.1755	* 1.4789	* 0.9777	*
	* 2.0637	* 2.5489	* 2.1109	* 2.4198	* 2.6093	* 2.2746	* 3.3845	*
13	* 1.5398	* 1.7255	* 1.6344	* 1.7828	* 1.4776	* 0.8276	* 0.5106	*
	* 2.5031	* 2.2304	* 2.3283	* 2.1606	* 2.2760	* 3.5727	* 6.0006	*
14	* 1.9356	* 1.9463	* 1.8927	* 1.7411	* 0.9771	* 0.4982	*	
	* 2.0203	* 2.0085	* 2.0503	* 2.2192	* 3.3861	* 6.0896	*	
15	* 0.9470	* 0.9862	* 0.8990	* 0.8087	* F-SUB-Q			
	* 3.7021	* 3.5768	* 3.8491	* 4.2904	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 187 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 250 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0490	* 1.3298	* 1.8658	* 1.5195	* 1.9434	* 1.5370	* 1.9508	* 0.9322
	* 3.7127	* 3.3229	* 2.3702	* 2.8187	* 2.2352	* 2.7139	* 2.1699	* 4.0560
9	* 1.3298	* 1.7573	* 1.4516	* 1.9236	* 1.5305	* 1.7273	* 1.9623	* 0.9697
	* 3.3230	* 2.5425	* 2.9892	* 2.2740	* 2.7871	* 2.4146	* 2.1561	* 3.9246
10	* 1.8658	* 1.4483	* 1.5405	* 1.6531	* 1.9031	* 1.6353	* 1.9100	* 0.8817
	* 2.3702	* 2.9967	* 2.7923	* 2.6072	* 2.2852	* 2.5380	* 2.2133	* 4.2543
11	* 1.5195	* 1.9190	* 1.6485	* 1.8115	* 1.5608	* 1.8016	* 1.7606	* 0.7964
	* 2.8187	* 2.2793	* 2.6136	* 2.4162	* 2.6762	* 2.3739	* 2.4038	* 4.7506
12	* 1.9434	* 1.5288	* 1.9001	* 1.5593	* 1.1749	* 1.4974	* 0.9653	*
	* 2.2352	* 2.7904	* 2.2884	* 2.6779	* 2.8807	* 2.4877	* 3.7997	*
13	* 1.5370	* 1.7265	* 1.6338	* 1.8003	* 1.4961	* 0.8296	* 0.5054	*
	* 2.7139	* 2.4155	* 2.5399	* 2.3753	* 2.4892	* 3.9781	* 6.7207	*
14	* 1.9508	* 1.9617	* 1.9089	* 1.7593	* 0.9645	* 0.4921	*	*
	* 2.1699	* 2.1567	* 2.2145	* 2.4054	* 3.8022	* 6.8339	*	*
15	* 0.9322	* 0.9696	* 0.8812	* 0.7957	* F-SUB-Q			
	* 4.0560	* 3.9250	* 4.2566	* 4.7541	* M-SUB-Q			

AT 50% POWER, 250 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0470	* 1.3239	* 1.8587	* 1.5068	* 1.9308	* 1.5220	* 1.9377	* 0.9228
	* 3.7627	* 3.3985	* 2.5591	* 3.0683	* 2.4494	* 3.0080	* 2.3972	* 4.4847
9	* 1.3239	* 1.7524	* 1.4421	* 1.9145	* 1.5177	* 1.7125	* 1.9496	* 0.9612
	* 3.3985	* 2.6682	* 3.2290	* 2.4924	* 3.0683	* 2.6739	* 2.3817	* 4.3340
10	* 1.8587	* 1.4388	* 1.5296	* 1.6433	* 1.8956	* 1.6215	* 1.8998	* 0.8740
	* 2.5591	* 3.2372	* 3.0534	* 2.8739	* 2.4929	* 2.8152	* 2.4455	* 4.7003
11	* 1.5068	* 1.9099	* 1.6386	* 1.8068	* 1.5544	* 1.7963	* 1.7558	* 0.7911
	* 3.0683	* 2.4974	* 2.8814	* 2.5099	* 2.7898	* 2.4990	* 2.6388	* 5.2514
12	* 1.9308	* 1.5160	* 1.8927	* 1.5530	* 1.1721	* 1.4984	* 0.9633	*
	* 2.4494	* 3.0722	* 2.4960	* 2.7917	* 3.0451	* 2.6454	* 4.0458	*
13	* 1.5220	* 1.7117	* 1.6199	* 1.7951	* 1.4971	* 0.8318	* 0.5061	*
	* 3.0081	* 2.6750	* 2.8173	* 2.5006	* 2.6471	* 4.2504	* 7.2223	*
14	* 1.9377	* 1.9490	* 1.8986	* 1.7545	* 0.9626	* 0.4924	*	*
	* 2.3972	* 2.3823	* 2.4467	* 2.6407	* 4.0485	* 7.3495	*	*
15	* 0.9228	* 0.9611	* 0.8735	* 0.7905	* F-SUB-Q			
	* 4.4847	* 4.3345	* 4.7027	* 5.2550	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 188 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 250 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0479	* 1.3165	* 1.8304	* 1.4844	* 1.8957	* 1.4969	* 1.9016	* 0.9172 *
	* 3.7897	* 3.4417	* 2.4983	* 2.9934	* 2.3963	* 2.9678	* 2.3951	* 4.4465 *
9	* 1.3165	* 1.7285	* 1.4246	* 1.8828	* 1.4965	* 1.6844	* 1.9141	* 0.9567 *
	* 3.4417	* 2.6722	* 3.1427	* 2.4371	* 2.9934	* 2.6542	* 2.3867	* 4.2923 *
10	* 1.8304	* 1.4214	* 1.5095	* 1.6225	* 1.8669	* 1.5971	* 1.8684	* 0.8743 *
	* 2.4983	* 3.1507	* 2.9774	* 2.8031	* 2.4902	* 2.8119	* 2.4739	* 4.6764 *
11	* 1.4844	* 1.8782	* 1.6182	* 1.7829	* 1.5475	* 1.7745	* 1.7338	* 0.7904 *
	* 2.9934	* 2.4420	* 2.8107	* 2.5578	* 2.8400	* 2.5508	* 2.6923	* 5.3064 *
12	* 1.8957	* 1.4947	* 1.8639	* 1.5461	* 1.1742	* 1.4888	* 0.9711	*
	* 2.3963	* 2.9972	* 2.4942	* 2.8418	* 3.1049	* 2.7020	* 4.0604	*
13	* 1.4969	* 1.6835	* 1.5956	* 1.7733	* 1.4876	* 0.8395	* 0.5124	*
	* 2.9678	* 2.6554	* 2.8149	* 2.5524	* 2.7036	* 4.2938	* 7.2567	*
14	* 1.9016	* 1.9135	* 1.8673	* 1.7325	* 0.9705	* 0.4988	*	*
	* 2.3951	* 2.3874	* 2.4754	* 2.6943	* 4.0625	* 7.3812	*	*
15	* 0.9172	* 0.9566	* 0.8738	* 0.7898	* F-SUB-Q			
	* 4.4466	* 4.2930	* 4.6792	* 5.3105	* M-SUB-Q			

AT 50% POWER, 250 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0546	* 1.3209	* 1.8511	* 1.4841	* 1.9091	* 1.4943	* 1.9160	* 0.9025 *
	* 3.6228	* 3.2798	* 2.3966	* 2.8994	* 2.3055	* 2.8746	* 2.2996	* 4.3571 *
9	* 1.3209	* 1.7539	* 1.4273	* 1.9027	* 1.4962	* 1.6865	* 1.9298	* 0.9405 *
	* 3.2798	* 2.5585	* 3.0413	* 2.3405	* 2.9051	* 2.5669	* 2.2916	* 4.2162 *
10	* 1.8511	* 1.4241	* 1.5145	* 1.6310	* 1.8917	* 1.6019	* 1.8886	* 0.8586 *
	* 2.3966	* 3.0491	* 2.8828	* 2.7100	* 2.3910	* 2.7252	* 2.3765	* 4.6112 *
11	* 1.4841	* 1.8980	* 1.6263	* 1.8126	* 1.5519	* 1.8054	* 1.7635	* 0.7813 *
	* 2.8994	* 2.3453	* 2.7175	* 2.4481	* 2.7365	* 2.4484	* 2.5726	* 5.2192 *
12	* 1.9091	* 1.4945	* 1.8887	* 1.5505	* 1.1840	* 1.5253	* 0.9696	*
	* 2.3055	* 2.9088	* 2.3949	* 2.7381	* 2.9971	* 2.5836	* 3.9510	*
13	* 1.4943	* 1.6856	* 1.6004	* 1.8042	* 1.5240	* 0.8546	* 0.5151	*
	* 2.8746	* 2.5681	* 2.7282	* 2.4497	* 2.5850	* 4.1411	* 6.9899	*
14	* 1.9160	* 1.9292	* 1.8875	* 1.7622	* 0.9690	* 0.5004	*	*
	* 2.2996	* 2.2923	* 2.3779	* 2.5742	* 3.9529	* 7.1225	*	*
15	* 0.9025	* 0.9404	* 0.8581	* 0.7806	* F-SUB-Q			
	* 4.3571	* 4.2169	* 4.6138	* 5.2235	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 189 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 250 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0846	* 1.3339	* 1.8579	* 1.4782	* 1.9059	* 1.4855	* 1.9122	* 0.8931
	* 3.3353	* 3.0201	* 2.2111	* 2.6939	* 2.1421	* 2.6821	* 2.1406	* 4.0616
9	* 1.3339	* 1.7703	* 1.4266	* 1.9057	* 1.4919	* 1.6797	* 1.9274	* 0.9300
	* 3.0201	* 2.3487	* 2.8121	* 2.1665	* 2.7001	* 2.3934	* 2.1330	* 3.9334
10	* 1.8579	* 1.4234	* 1.5154	* 1.6342	* 1.9030	* 1.6019	* 1.8936	* 0.8519
	* 2.2111	* 2.8191	* 2.6671	* 2.5103	* 2.2118	* 2.5361	* 2.2054	* 4.2867
11	* 1.4782	* 1.9009	* 1.6295	* 1.8347	* 1.5682	* 1.8335	* 1.7845	* 0.7779
	* 2.6939	* 2.1716	* 2.5168	* 2.2469	* 2.5192	* 2.2458	* 2.3583	* 4.8331
12	* 1.9059	* 1.4903	* 1.9000	* 1.5673	* 1.2222	* 1.5736	* 0.9845	*
	* 2.1421	* 2.7033	* 2.2152	* 2.5205	* 2.7559	* 2.3658	* 3.6455	*
13	* 1.4855	* 1.6787	* 1.6003	* 1.8323	* 1.5724	* 0.8974	* 0.5291	*
	* 2.6821	* 2.3945	* 2.5389	* 2.2471	* 2.3671	* 3.8151	* 6.4647	*
14	* 1.9122	* 1.9268	* 1.8925	* 1.7833	* 0.9841	* 0.5136	*	*
	* 2.1406	* 2.1336	* 2.2065	* 2.3599	* 3.6466	* 6.5937	*	*
15	* 0.8931	* 0.9299	* 0.8514	* 0.7773	* F-SUB-Q			
	* 4.0616	* 3.9340	* 4.2890	* 4.8369	* M-SUB-Q			

AT 50% POWER, 250 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1752	* 1.3527	* 1.8581	* 1.4692	* 1.8947	* 1.4735	* 1.8988	* 0.8863
	* 3.0734	* 2.7789	* 2.0143	* 2.4626	* 1.9557	* 2.4540	* 1.9546	* 3.7151
9	* 1.3527	* 1.7851	* 1.4244	* 1.9000	* 1.4866	* 1.6687	* 1.9158	* 0.9259
	* 2.7789	* 2.1365	* 2.5661	* 1.9765	* 2.4677	* 2.1868	* 1.9467	* 3.5872
10	* 1.8581	* 1.4211	* 1.5161	* 1.6350	* 1.9116	* 1.6007	* 1.8909	* 0.8495
	* 2.0143	* 2.5726	* 2.4343	* 2.2898	* 2.0159	* 2.3158	* 2.0098	* 3.9103
11	* 1.4692	* 1.8952	* 1.6305	* 1.8638	* 1.5984	* 1.8646	* 1.8015	* 0.7822
	* 2.4626	* 1.9815	* 2.2958	* 2.0809	* 2.3367	* 2.0799	* 2.1805	* 4.3909
12	* 1.8947	* 1.4850	* 1.9089	* 1.5977	* 1.3231	* 1.6618	* 1.0114	*
	* 1.9557	* 2.4707	* 2.0191	* 2.3380	* 2.5640	* 2.1977	* 3.3745	*
13	* 1.4735	* 1.6677	* 1.5990	* 1.8634	* 1.6607	* 0.9849	* 0.5522	*
	* 2.4540	* 2.1879	* 2.3185	* 2.0811	* 2.1990	* 3.5484	* 6.0126	*
14	* 1.8988	* 1.9152	* 1.8898	* 1.8002	* 1.0108	* 0.5359	*	*
	* 1.9546	* 1.9473	* 2.0109	* 2.1820	* 3.3760	* 6.1338	*	*
15	* 0.8863	* 0.9258	* 0.8490	* 0.7815	* F-SUB-Q			
	* 3.7151	* 3.5878	* 3.9125	* 4.3943	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 190 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 250 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2443	* 1.3635	* 1.8405	* 1.4526	* 1.8665	* 1.4549	* 1.8681	* 0.8837
	* 3.0588	* 2.7709	* 2.0210	* 2.4696	* 1.9664	* 2.4611	* 1.9659	* 3.7000
9	* 1.3635	* 1.7823	* 1.4151	* 1.8754	* 1.4791	* 1.6480	* 1.8891	* 0.9238
	* 2.7709	* 2.1405	* 2.5673	* 1.9871	* 2.4723	* 2.1930	* 1.9567	* 3.5632
10	* 1.8405	* 1.4119	* 1.5082	* 1.6266	* 1.9017	* 1.5903	* 1.8710	* 0.8528
	* 2.0210	* 2.5738	* 2.4376	* 2.2916	* 2.0236	* 2.3187	* 2.0156	* 3.8656
11	* 1.4526	* 1.8707	* 1.6221	* 1.8735	* 1.6190	* 1.8784	* 1.8015	* 0.7870
	* 2.4696	* 1.9919	* 2.2974	* 2.0982	* 2.3499	* 2.0937	* 2.1777	* 4.3457
12	* 1.8665	* 1.4765	* 1.8990	* 1.6183	* 1.4475	* 1.7376	* 1.0426	*
	* 1.9664	* 2.4753	* 2.0268	* 2.3511	* 2.5793	* 2.2145	* 3.3449	*
13	* 1.4549	* 1.6470	* 1.5886	* 1.8772	* 1.7366	* 1.0625	* 0.5770	*
	* 2.4611	* 2.1941	* 2.3215	* 2.0949	* 2.2157	* 3.5409	* 5.9802	*
14	* 1.8681	* 1.8881	* 1.8699	* 1.8003	* 1.0419	* 0.5602	*	*
	* 1.9659	* 1.9573	* 2.0167	* 2.1792	* 3.3469	* 6.0980	*	*
15	* 0.8837	* 0.9236	* 0.8523	* 0.7863	* F-SUB-Q			
	* 3.7000	* 3.5639	* 3.8679	* 4.3491	* M-SUB-Q			

AT 50% POWER, 250 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2633	* 1.3751	* 1.8578	* 1.4488	* 1.8760	* 1.4498	* 1.8789	* 0.8644
	* 2.8269	* 2.5465	* 1.8562	* 2.2937	* 1.8112	* 2.2865	* 1.8088	* 3.4975
9	* 1.3751	* 1.8130	* 1.4150	* 1.8906	* 1.4718	* 1.6485	* 1.9042	* 0.9028
	* 2.5465	* 1.9601	* 2.3820	* 1.8268	* 2.2972	* 2.0298	* 1.7989	* 3.3788
10	* 1.8578	* 1.4123	* 1.5121	* 1.6327	* 1.9290	* 1.5957	* 1.8904	* 0.8338
	* 1.8562	* 2.3880	* 2.2581	* 2.1170	* 1.8557	* 2.1451	* 1.8482	* 3.6664
11	* 1.4488	* 1.8853	* 1.6281	* 1.9104	* 1.6428	* 1.9187	* 1.8352	* 0.7741
	* 2.2937	* 1.8313	* 2.1228	* 1.9106	* 2.1554	* 1.9027	* 1.9852	* 4.1021
12	* 1.8760	* 1.4702	* 1.9264	* 1.6421	* 1.5011	* 1.8069	* 1.0420	*
	* 1.8112	* 2.2999	* 1.8587	* 2.1565	* 2.3862	* 2.0334	* 3.1361	*
13	* 1.4498	* 1.6475	* 1.5940	* 1.9175	* 1.8058	* 1.0941	* 0.5814	*
	* 2.2865	* 2.0310	* 2.1473	* 1.9038	* 2.0346	* 3.3193	* 5.6671	*
14	* 1.8789	* 1.9032	* 1.8892	* 1.8339	* 1.0417	* 0.5635	*	*
	* 1.8088	* 1.7995	* 1.8493	* 1.9865	* 3.1367	* 5.7900	*	*
15	* 0.8644	* 0.9027	* 0.8333	* 0.7734	* F-SUB-Q			
	* 3.4975	* 3.3795	* 3.6686	* 4.1056	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 191 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 250 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2572	* 1.3599	* 1.8310	* 1.4240	* 1.8453	* 1.4258	* 1.8489	* 0.8473
	* 2.6503	* 2.3982	* 1.7584	* 2.1828	* 1.7213	* 2.1756	* 1.7188	* 3.3428
9	* 1.3599	* 1.7941	* 1.3939	* 1.8609	* 1.4485	* 1.6239	* 1.8774	* 0.8855
	* 2.3982	* 1.8471	* 2.2600	* 1.7347	* 2.1831	* 1.9270	* 1.7079	* 3.2270
10	* 1.8310	* 1.3912	* 1.4925	* 1.6111	* 1.9064	* 1.5754	* 1.8668	* 0.8194
	* 1.7584	* 2.2658	* 2.1397	* 2.0039	* 1.7555	* 2.0307	* 1.7481	* 3.4933
11	* 1.4240	* 1.8553	* 1.6065	* 1.8935	* 1.6298	* 1.9072	* 1.8211	* 0.7631
	* 2.1828	* 1.7391	* 2.0094	* 1.8059	* 2.0354	* 1.7930	* 1.8591	* 3.8921
12	* 1.8453	* 1.4470	* 1.9038	* 1.6291	* 1.5011	* 1.8078	* 1.0367	*
	* 1.7213	* 2.1857	* 1.7584	* 2.0364	* 2.2232	* 1.8958	* 2.9530	*
13	* 1.4258	* 1.6229	* 1.5736	* 1.9060	* 1.8067	* 1.0971	* 0.5806	*
	* 2.1756	* 1.9281	* 2.0329	* 1.7940	* 1.8969	* 3.0992	* 5.3143	*
14	* 1.8489	* 1.8764	* 1.8656	* 1.8198	* 1.0364	* 0.5625	*	*
	* 1.7188	* 1.7085	* 1.7492	* 1.8604	* 2.9537	* 5.4314	*	*
15	* 0.8473	* 0.8854	* 0.8189	* 0.7624	* F-SUB-Q			
	* 3.3428	* 3.2276	* 3.4955	* 3.8955	* M-SUB-Q			

AT 50% POWER, 250 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2275	* 1.3144	* 1.7472	* 1.3706	* 1.7614	* 1.3753	* 1.7643	* 0.8293
	* 2.5621	* 2.3069	* 1.7337	* 2.1416	* 1.7025	* 2.1324	* 1.7020	* 3.2409
9	* 1.3144	* 1.7162	* 1.3436	* 1.7731	* 1.4047	* 1.5648	* 1.7936	* 0.8678
	* 2.3069	* 1.8042	* 2.2088	* 1.7165	* 2.1346	* 1.8893	* 1.6894	* 3.1179
10	* 1.7472	* 1.3414	* 1.4452	* 1.5532	* 1.8200	* 1.5217	* 1.7851	* 0.8059
	* 1.7337	* 2.2136	* 2.0823	* 1.9566	* 1.7253	* 1.9785	* 1.7225	* 3.3586
11	* 1.3706	* 1.7678	* 1.5488	* 1.8132	* 1.5758	* 1.8329	* 1.7458	* 0.7507
	* 2.1416	* 1.7209	* 1.9619	* 1.7585	* 1.9692	* 1.7409	* 1.8132	* 3.7304
12	* 1.7614	* 1.4022	* 1.8175	* 1.5752	* 1.4577	* 1.7397	* 1.0250	*
	* 1.7025	* 2.1372	* 1.7278	* 1.9702	* 2.1698	* 1.8664	* 2.8180	*
13	* 1.3753	* 1.5638	* 1.5200	* 1.8317	* 1.7387	* 1.0779	* 0.5750	*
	* 2.1324	* 1.8904	* 1.9806	* 1.7421	* 1.8676	* 2.9903	* 5.0976	*
14	* 1.7643	* 1.7926	* 1.7839	* 1.7445	* 1.0243	* 0.5579	*	*
	* 1.7020	* 1.6900	* 1.7236	* 1.8145	* 2.8198	* 5.2025	*	*
15	* 0.8293	* 0.8676	* 0.8053	* 0.7500	* F-SUB-Q			
	* 3.2409	* 3.1185	* 3.3608	* 3.7337	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 192 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 250 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1737	* 1.2577	* 1.6675	* 1.3107	* 1.6844	* 1.3187	* 1.6874	* 0.7796 *
	* 2.4942	* 2.2764	* 1.7236	* 2.1335	* 1.6964	* 2.1226	* 1.6980	* 3.2905 *
9	* 1.2577	* 1.6421	* 1.2860	* 1.6922	* 1.3370	* 1.5026	* 1.7170	* 0.8162 *
	* 2.2764	* 1.7784	* 2.1910	* 1.7108	* 2.1228	* 1.8763	* 1.6838	* 3.1694 *
10	* 1.6675	* 1.2835	* 1.3883	* 1.4892	* 1.7381	* 1.4634	* 1.7093	* 0.7567 *
	* 1.7236	* 2.1959	* 2.0530	* 1.9343	* 1.7103	* 1.9523	* 1.7103	* 3.4137 *
11	* 1.3107	* 1.6871	* 1.4847	* 1.7318	* 1.5123	* 1.7586	* 1.6720	* 0.7070 *
	* 2.1335	* 1.7152	* 1.9397	* 1.7356	* 1.9304	* 1.7097	* 1.7922	* 3.7663 *
12	* 1.6844	* 1.3356	* 1.7357	* 1.5117	* 1.4048	* 1.6694	* 0.9665	*
	* 1.6964	* 2.1253	* 1.7127	* 1.9314	* 2.1163	* 1.8283	* 2.8094	*
13	* 1.3187	* 1.5016	* 1.4617	* 1.7574	* 1.6683	* 1.0237	* 0.5434	*
	* 2.1226	* 1.8774	* 1.9545	* 1.7109	* 1.8295	* 2.9850	* 5.1023	*
14	* 1.6874	* 1.7160	* 1.7082	* 1.6708	* 0.9657	* 0.5264	*	
	* 1.6980	* 1.6844	* 1.7115	* 1.7935	* 2.8116	* 5.2152	*	
15	* 0.7796	* 0.8160	* 0.7563	* 0.7063	* F-SUB-Q			
	* 3.2905	* 3.1700	* 3.4159	* 3.7698	* M-SUB-Q			

AT 50% POWER, 250 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0705	* 1.1450	* 1.4896	* 1.1915	* 1.5058	* 1.2000	* 1.5047	* 0.7093
	* 2.6096	* 2.3787	* 1.8502	* 2.2585	* 1.8264	* 2.2492	* 1.8359	* 3.4948
9	* 1.1450	* 1.4659	* 1.1711	* 1.5134	* 1.2195	* 1.3607	* 1.5312	* 0.7401
	* 2.3787	* 1.8964	* 2.3087	* 1.8373	* 2.2355	* 1.9960	* 1.8191	* 3.3771
10	* 1.4896	* 1.1689	* 1.2670	* 1.3562	* 1.5542	* 1.3331	* 1.5238	* 0.6874
	* 1.8502	* 2.3137	* 2.1569	* 2.0357	* 1.8289	* 2.0558	* 1.8438	* 3.6256
11	* 1.1915	* 1.5089	* 1.3521	* 1.5497	* 1.3774	* 1.5714	* 1.4884	* 0.6401
	* 2.2584	* 1.8424	* 2.0413	* 1.8535	* 2.0282	* 1.8314	* 1.9245	* 4.0005
12	* 1.5058	* 1.2182	* 1.5522	* 1.3770	* 1.2792	* 1.4891	* 0.8794	
	* 1.8264	* 2.2379	* 1.8315	* 2.0292	* 2.2105	* 1.9509	* 2.9546	
13	* 1.2000	* 1.3598	* 1.3315	* 1.5704	* 1.4881	* 0.9252	* 0.4954	
	* 2.2492	* 1.9972	* 2.0581	* 1.8326	* 1.9521	* 3.1372	* 5.3373	
14	* 1.5047	* 1.5303	* 1.5228	* 1.4873	* 0.8781	* 0.4799		
	* 1.8359	* 1.8198	* 1.8450	* 1.9260	* 2.9587	* 5.4559		
15	* 0.7093	* 0.7399	* 0.6869	* 0.6395	* F-SUB-Q			
	* 3.4948	* 3.3778	* 3.6278	* 4.0042	* M-SUB-Q			

CNEI-0400-355
Appendix A, Rev. 0
Page 193 of 312

F-SUB-O & M-SUB-O VALUES (F-SUB-O OP MARGIN) - NORMAL OPERATION

	H	G	F	E	D	C	B	A
8	* 0.8551	* 0.9221	* 1.2143	* 0.9561	* 1.2182	* 0.9559	* 1.2046	* 0.5727
	* 3.1391	* 2.8500	* 2.1983	* 2.7320	* 2.1916	* 2.7455	* 2.2302	* 4.2179
9	* 0.9221	* 1.2054	* 0.9433	* 1.2559	* 0.9856	* 1.0783	* 1.2223	* 0.5959
	* 2.8500	* 2.2255	* 2.7772	* 2.1458	* 2.6795	* 2.4481	* 2.2120	* 4.0855
10	* 1.2143	* 0.9417	* 1.0163	* 1.0943	* 1.2857	* 1.0695	* 1.2152	* 0.5514
	* 2.1983	* 2.7826	* 2.6040	* 2.4425	* 2.1336	* 2.4878	* 2.2439	* 4.3987
11	* 0.9561	* 1.2528	* 1.0913	* 1.2800	* 1.1070	* 1.2488	* 1.1767	* 0.5125
	* 2.7320	* 2.1510	* 2.4487	* 2.1572	* 2.4286	* 2.2200	* 2.3541	* 4.8528
12	* 1.2182	* 0.9847	* 1.2842	* 1.1066	* 1.0021	* 1.1907	* 0.7100	*
	* 2.1916	* 2.6823	* 2.1362	* 2.4298	* 2.7292	* 2.3608	* 3.5489	*
13	* 0.9559	* 1.0776	* 1.0684	* 1.2481	* 1.1900	* 0.7306	* 0.4017	*
	* 2.7455	* 2.4494	* 2.4905	* 2.2212	* 2.3621	* 3.8426	* 6.3781	*
14	* 1.2046	* 1.2217	* 1.2145	* 1.1759	* 0.7089	* 0.3892	*	*
	* 2.2302	* 2.2127	* 2.2452	* 2.3557	* 3.5543	* 6.5178	*	*
15	* 0.5727	* 0.5958	* 0.5510	* 0.5120	* F-SUB-Q			
	* 4.2179	* 4.0861	* 4.4013	* 4.8570	* M-SUB-Q			

	H	G	F	E	D	C	B	A
8	0.3743	0.4032	0.4882	0.4192	0.4893	0.4026	0.4511	0.2410
	6.9471	6.3273	5.3113	6.0650	5.3077	6.3342	5.7923	9.7721
9	0.4032	0.4721	0.4134	0.5016	0.4331	0.4270	0.4561	0.2479
	6.3273	5.5060	6.1669	5.2162	5.9255	6.0106	5.7528	9.5755
10	0.4882	0.4126	0.4165	0.4601	0.5131	0.4338	0.4529	0.2336
	5.3113	6.1768	6.1637	5.6382	5.1781	5.9464	5.8473	10.1161
11	0.4192	0.5005	0.4589	0.5109	0.4507	0.4939	0.4343	0.2126
	6.0650	5.2275	5.6513	5.2213	5.7687	5.4402	6.1861	11.3856
12	0.4893	0.4326	0.5125	0.4505	0.4008	0.4450	0.2979	
	5.3077	5.9327	5.1843	5.7719	6.5770	6.1232	8.1983	
13	0.4026	0.4267	0.4334	0.4936	0.4448	0.3141	0.1701	
	6.3342	6.0135	5.9524	5.4436	6.1267	8.6890	14.6706	
14	0.4511	0.4559	0.4527	0.4339	0.2974	0.1674		
	5.7923	5.7546	5.8508	6.1907	8.2111	14.7677		
15	0.2410	0.2478	0.2335	0.2124	F-SUB-Q			
	9.7721	9.5769	10.1216	11.3953	M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355

Appendix A, Rev. 0

Page 194 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 350 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.3203	* 0.4126	* 0.5280	* 0.4910	* 0.5665	* 0.4519	* 0.3899	* 0.2035
	* 5.4359	* 5.3880	* 4.4084	* 4.6462	* 4.2113	* 4.8128	* 4.6375	* 7.2246
9	* 0.4126	* 0.4688	* 0.4436	* 0.5579	* 0.5026	* 0.4817	* 0.4797	* 0.2636
	* 5.3880	* 4.7727	* 4.9108	* 4.2346	* 4.5446	* 4.6636	* 4.6266	* 7.2272
10	* 0.5280	* 0.4433	* 0.3847	* 0.5009	* 0.5627	* 0.4983	* 0.5018	* 0.2638
	* 4.4084	* 4.9194	* 4.8462	* 4.4789	* 4.2528	* 4.6116	* 4.7163	* 7.5926
11	* 0.4910	* 0.5576	* 0.5004	* 0.5219	* 0.4765	* 0.5300	* 0.4823	* 0.2532
	* 4.6462	* 4.2401	* 4.4862	* 4.4465	* 4.6760	* 4.4758	* 4.9053	* 8.4133
12	* 0.5665	* 0.5024	* 0.5623	* 0.4764	* 0.3538	* 0.4218	* 0.3204	*
	* 4.2113	* 4.5487	* 4.2568	* 4.6784	* 5.0277	* 4.9350	* 6.3889	*
13	* 0.4519	* 0.4815	* 0.4981	* 0.5298	* 0.4215	* 0.2722	* 0.1802	*
	* 4.8128	* 4.6648	* 4.6133	* 4.4775	* 4.9374	* 6.5884	* 10.7484	*
14	* 0.3899	* 0.4796	* 0.5016	* 0.4821	* 0.3200	* 0.1754	*	*
	* 4.6375	* 4.6274	* 4.7180	* 4.9078	* 6.3937	* 10.7607	*	*
15	* 0.2035	* 0.2635	* 0.2637	* 0.2530	* F-SUB-Q			
	* 7.2246	* 7.2279	* 7.5943	* 8.4179	* M-SUB-Q			

AT 50% POWER, 350 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.6669	* 0.8737	* 1.1748	* 1.0352	* 1.2571	* 0.9776	* 0.9046	* 0.4590
	* 2.8096	* 2.6487	* 2.0619	* 2.2943	* 1.9755	* 2.3059	* 2.0331	* 3.3434
9	* 0.8737	* 1.0677	* 0.9377	* 1.2485	* 1.0571	* 1.0867	* 1.1397	* 0.5957
	* 2.6487	* 2.1719	* 2.4100	* 1.9602	* 2.2488	* 2.1069	* 2.0184	* 3.3446
10	* 1.1748	* 0.9371	* 0.8479	* 1.0830	* 1.2667	* 1.1238	* 1.1952	* 0.5961
	* 2.0619	* 2.4146	* 2.2618	* 2.1448	* 1.9748	* 2.1322	* 2.0558	* 3.5245
11	* 1.0352	* 1.2478	* 1.0817	* 1.1669	* 1.0669	* 1.1948	* 1.1569	* 0.5738
	* 2.2943	* 1.9631	* 2.1485	* 2.0356	* 2.1430	* 2.0853	* 2.1471	* 3.9029
12	* 1.2571	* 1.0567	* 1.2661	* 1.0665	* 0.7912	* 1.0004	* 0.7111	*
	* 1.9755	* 2.2508	* 1.9768	* 2.1441	* 2.2879	* 2.1444	* 2.9972	*
13	* 0.9776	* 1.0863	* 1.1234	* 1.1943	* 0.9997	* 0.5794	* 0.3994	*
	* 2.3059	* 2.1074	* 2.1332	* 2.0859	* 2.1454	* 3.1743	* 4.9736	*
14	* 0.9046	* 1.1394	* 1.1948	* 1.1563	* 0.7102	* 0.3885	*	*
	* 2.0331	* 2.0187	* 2.0564	* 2.1481	* 2.9996	* 4.9835	*	*
15	* 0.4590	* 0.5956	* 0.5959	* 0.5735	* F-SUB-Q			
	* 3.3434	* 3.3451	* 3.5253	* 3.9047	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 195 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 350 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.8271	* 1.0702	* 1.4409	* 1.2664	* 1.5390	* 1.1978	* 1.1425	* 0.5880
	* 2.4320	* 2.2498	* 1.7473	* 1.9477	* 1.6733	* 1.9531	* 1.7021	* 2.7781
9	* 1.0702	* 1.2947	* 1.1546	* 1.4957	* 1.2847	* 1.3233	* 1.4080	* 0.7478
	* 2.2498	* 1.8612	* 2.0458	* 1.6941	* 1.9201	* 1.7658	* 1.6917	* 2.7588
10	* 1.4409	* 1.1541	* 1.0610	* 1.3210	* 1.5159	* 1.3710	* 1.4667	* 0.7394
	* 1.7473	* 2.0500	* 1.9081	* 1.8279	* 1.7130	* 1.8087	* 1.7298	* 2.9143
11	* 1.2664	* 1.4947	* 1.3193	* 1.4011	* 1.3012	* 1.4633	* 1.4198	* 0.7143
	* 1.9477	* 1.6969	* 1.8312	* 1.7580	* 1.8177	* 1.7583	* 1.8043	* 3.2454
12	* 1.5390	* 1.2842	* 1.5151	* 1.3006	* 0.9779	* 1.2232	* 0.8743	*
	* 1.6733	* 1.9219	* 1.7147	* 1.8187	* 1.9193	* 1.8121	* 2.5019	*
13	* 1.1978	* 1.3228	* 1.3707	* 1.4627	* 1.2224	* 0.7221	* 0.4863	*
	* 1.9531	* 1.7662	* 1.8094	* 1.7589	* 1.8129	* 2.6199	* 4.1887	*
14	* 1.1425	* 1.4077	* 1.4663	* 1.4191	* 0.8735	* 0.4761	*	*
	* 1.7021	* 1.6919	* 1.7303	* 1.8052	* 2.5030	* 4.1697	*	*
15	* 0.5880	* 0.7476	* 0.7391	* 0.7140	* F-SUB-Q			
	* 2.7781	* 2.7589	* 2.9150	* 3.2468	* M-SUB-Q			

AT 50% POWER, 350 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9147	* 1.1936	* 1.6517	* 1.4079	* 1.7521	* 1.3349	* 1.3380	* 0.6747
	* 2.3204	* 2.1261	* 1.6054	* 1.8389	* 1.5418	* 1.8426	* 1.5543	* 2.6480
9	* 1.1936	* 1.4925	* 1.2900	* 1.7172	* 1.4231	* 1.4780	* 1.6266	* 0.8255
	* 2.1261	* 1.7098	* 1.9309	* 1.5529	* 1.8181	* 1.6543	* 1.5460	* 2.6301
10	* 1.6517	* 1.2884	* 1.1996	* 1.4786	* 1.7292	* 1.5183	* 1.6785	* 0.8103
	* 1.6054	* 1.9351	* 1.8038	* 1.7201	* 1.5696	* 1.7056	* 1.5834	* 2.8028
11	* 1.4079	* 1.7159	* 1.4765	* 1.5994	* 1.4439	* 1.6531	* 1.6110	* 0.7766
	* 1.8389	* 1.5557	* 1.7234	* 1.6115	* 1.7108	* 1.6101	* 1.6446	* 3.0983
12	* 1.7521	* 1.4224	* 1.7279	* 1.4432	* 1.0724	* 1.3770	* 0.9409	*
	* 1.5418	* 1.8197	* 1.5712	* 1.7119	* 1.8153	* 1.6634	* 2.4069	*
13	* 1.3349	* 1.4776	* 1.5180	* 1.6525	* 1.3761	* 0.7889	* 0.5187	*
	* 1.8426	* 1.6546	* 1.7061	* 1.6106	* 1.6642	* 2.4829	* 4.0601	*
14	* 1.3380	* 1.6263	* 1.6781	* 1.6102	* 0.9399	* 0.5081	*	*
	* 1.5543	* 1.5462	* 1.5839	* 1.6453	* 2.4086	* 4.0397	*	*
15	* 0.6747	* 0.8253	* 0.8100	* 0.7762	* F-SUB-Q			
	* 2.6480	* 2.6302	* 2.8034	* 3.0997	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 196 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 350 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9641	* 1.2600	* 1.7632	* 1.4760	* 1.8521	* 1.4120	* 1.5345	* 0.7889
	* 2.3680	* 2.1552	* 1.6065	* 1.8612	* 1.5464	* 1.8725	* 1.5556	* 2.6784
9	* 1.2600	* 1.6060	* 1.3747	* 1.8337	* 1.4917	* 1.5641	* 1.7561	* 0.8826
	* 2.1552	* 1.7162	* 1.9539	* 1.5491	* 1.8394	* 1.6772	* 1.5481	* 2.6517
10	* 1.7632	* 1.3728	* 1.3481	* 1.5680	* 1.8359	* 1.5806	* 1.7807	* 0.8550
	* 1.6065	* 1.9582	* 1.8353	* 1.7356	* 1.5617	* 1.7262	* 1.5825	* 2.8276
11	* 1.4760	* 1.8322	* 1.5655	* 1.7117	* 1.5098	* 1.7267	* 1.6887	* 0.8107
	* 1.8612	* 1.5517	* 1.7389	* 1.6080	* 1.7312	* 1.6071	* 1.6348	* 3.1050
12	* 1.8521	* 1.4908	* 1.8344	* 1.5091	* 1.1177	* 1.4363	* 0.9741	*
	* 1.5464	* 1.8412	* 1.5633	* 1.7322	* 1.8475	* 1.6681	* 2.4308	*
13	* 1.4120	* 1.5638	* 1.5803	* 1.7260	* 1.4354	* 0.8161	* 0.5329	*
	* 1.8725	* 1.6775	* 1.7266	* 1.6076	* 1.6688	* 2.5080	* 4.1253	*
14	* 1.5345	* 1.7557	* 1.7803	* 1.6879	* 0.9736	* 0.5221	*	*
	* 1.5556	* 1.5483	* 1.5829	* 1.6355	* 2.4311	* 4.1048	*	*
15	* 0.7889	* 0.8824	* 0.8547	* 0.8104	* F-SUB-Q			
	* 2.6784	* 2.6518	* 2.8282	* 3.1062	* M-SUB-Q			

AT 50% POWER, 350 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9951	* 1.3039	* 1.8246	* 1.5110	* 1.9007	* 1.4610	* 1.7665	* 0.8926
	* 2.4742	* 2.2395	* 1.6651	* 1.9312	* 1.5995	* 1.9536	* 1.6143	* 2.7802
9	* 1.3039	* 1.6847	* 1.4298	* 1.8979	* 1.5270	* 1.6203	* 1.8384	* 0.9302
	* 2.2395	* 1.7822	* 2.0361	* 1.6009	* 1.9052	* 1.7476	* 1.6057	* 2.7476
10	* 1.8246	* 1.4275	* 1.4720	* 1.6210	* 1.8873	* 1.6065	* 1.8316	* 0.8917
	* 1.6651	* 2.0406	* 1.9181	* 1.7975	* 1.6033	* 1.7850	* 1.6327	* 2.9201
11	* 1.5110	* 1.8958	* 1.6181	* 1.7786	* 1.5468	* 1.7498	* 1.7142	* 0.8276
	* 1.9312	* 1.6035	* 1.8005	* 1.6651	* 1.8053	* 1.6660	* 1.6913	* 3.2033
12	* 1.9007	* 1.5259	* 1.8856	* 1.5458	* 1.1392	* 1.4521	* 0.9881	*
	* 1.5995	* 1.9068	* 1.6047	* 1.8063	* 1.9404	* 1.7425	* 2.5251	*
13	* 1.4610	* 1.6199	* 1.6061	* 1.7492	* 1.4513	* 0.8244	* 0.5381	*
	* 1.9536	* 1.7479	* 1.7854	* 1.6665	* 1.7432	* 2.6222	* 4.3112	*
14	* 1.7665	* 1.8381	* 1.8311	* 1.7135	* 0.9877	* 0.5269	*	*
	* 1.6143	* 1.6059	* 1.6330	* 1.6919	* 2.5252	* 4.2915	*	*
15	* 0.8926	* 0.9302	* 0.8915	* 0.8273	* F-SUB-Q			
	* 2.7802	* 2.7477	* 2.9207	* 3.2045	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 197 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 350 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0097	* 1.3273	* 1.8738	* 1.5341	* 1.9402	* 1.4933	* 1.8813	* 0.9389
	* 2.6018	* 2.3401	* 1.7189	* 2.0130	* 1.6567	* 2.0365	* 1.6742	* 2.9301
9	* 1.3273	* 1.7457	* 1.4640	* 1.9511	* 1.5494	* 1.6732	* 1.9004	* 0.9776
	* 2.3401	* 1.8430	* 2.1146	* 1.6484	* 1.9880	* 1.8161	* 1.6607	* 2.8898
10	* 1.8738	* 1.4615	* 1.5336	* 1.6550	* 1.9314	* 1.6232	* 1.8726	* 0.9039
	* 1.7189	* 2.1192	* 1.9958	* 1.8667	* 1.6574	* 1.8661	* 1.6866	* 3.0539
11	* 1.5341	* 1.9479	* 1.6518	* 1.8317	* 1.5668	* 1.7680	* 1.7353	* 0.8285
	* 2.0130	* 1.6512	* 1.8700	* 1.7344	* 1.8976	* 1.7429	* 1.7662	* 3.3818
12	* 1.9402	* 1.5483	* 1.9294	* 1.5658	* 1.1431	* 1.4624	* 0.9823	*
	* 1.6567	* 1.9898	* 1.6592	* 1.8987	* 2.0573	* 1.8323	* 2.6890	*
13	* 1.4933	* 1.6728	* 1.6228	* 1.7674	* 1.4616	* 0.8206	* 0.5330	*
	* 2.0365	* 1.8164	* 1.8666	* 1.7434	* 1.8330	* 2.7878	* 4.6070	*
14	* 1.8813	* 1.9000	* 1.8722	* 1.7346	* 0.9820	* 0.5213	*	*
	* 1.6742	* 1.6608	* 1.6869	* 1.7668	* 2.6888	* 4.5913	*	*
15	* 0.9389	* 0.9775	* 0.9037	* 0.8282	* F-SUB-Q			
	* 2.9301	* 2.8899	* 3.0545	* 3.3830	* M-SUB-Q			

AT 50% POWER, 350 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0144	* 1.3357	* 1.8896	* 1.5369	* 1.9488	* 1.5072	* 1.9162	* 0.9549
	* 2.7938	* 2.5018	* 1.8301	* 2.1450	* 1.7600	* 2.1622	* 1.7647	* 3.0953
9	* 1.3357	* 1.7660	* 1.4729	* 1.9674	* 1.5512	* 1.6868	* 1.9267	* 0.9929
	* 2.5018	* 1.9604	* 2.2585	* 1.7524	* 2.1159	* 1.9295	* 1.7547	* 3.0553
10	* 1.8896	* 1.4703	* 1.5455	* 1.6615	* 1.9421	* 1.6195	* 1.8806	* 0.9073
	* 1.8301	* 2.2635	* 2.1322	* 1.9923	* 1.7501	* 1.9776	* 1.7890	* 3.2558
11	* 1.5369	* 1.9640	* 1.6582	* 1.8458	* 1.5689	* 1.7633	* 1.7329	* 0.8249
	* 2.1450	* 1.7554	* 1.9954	* 1.8493	* 2.0326	* 1.8618	* 1.8833	* 3.5902
12	* 1.9488	* 1.5500	* 1.9400	* 1.5678	* 1.1383	* 1.4566	* 0.9745	*
	* 1.7600	* 2.1174	* 1.7515	* 2.0336	* 2.2032	* 1.9550	* 2.8787	*
13	* 1.5072	* 1.6864	* 1.6190	* 1.7626	* 1.4558	* 0.8138	* 0.5278	*
	* 2.1622	* 1.9299	* 1.9781	* 1.8624	* 1.9558	* 2.9927	* 4.9433	*
14	* 1.9162	* 1.9265	* 1.8802	* 1.7322	* 0.9743	* 0.5157	*	*
	* 1.7647	* 1.7549	* 1.7894	* 1.8839	* 2.8782	* 4.9312	*	*
15	* 0.9549	* 0.9929	* 0.9070	* 0.8245	* F-SUB-Q			
	* 3.0953	* 3.0554	* 3.2563	* 3.5914	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 198 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 350 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0140	* 1.3328	* 1.8967	* 1.5322	* 1.9502	* 1.5060	* 1.9266	* 0.9530
	* 3.0559	* 2.6896	* 1.9493	* 2.2960	* 1.8749	* 2.3335	* 1.9006	* 3.3593
9	* 1.3328	* 1.7762	* 1.4712	* 1.9739	* 1.5446	* 1.6855	* 1.9344	* 0.9884
	* 2.6896	* 2.0998	* 2.4201	* 1.8602	* 2.2679	* 2.0730	* 1.8784	* 3.3237
10	* 1.8967	* 1.4686	* 1.5434	* 1.6580	* 1.9455	* 1.6103	* 1.8803	* 0.8982
	* 1.9493	* 2.4254	* 2.2937	* 2.1243	* 1.8665	* 2.1244	* 1.8998	* 3.5015
11	* 1.5322	* 1.9705	* 1.6547	* 1.8510	* 1.5609	* 1.7571	* 1.7281	* 0.8141
	* 2.2960	* 1.8632	* 2.1279	* 1.9715	* 2.2069	* 2.0111	* 2.0299	* 3.8886
12	* 1.9502	* 1.5435	* 1.9433	* 1.5599	* 1.1299	* 1.4521	* 0.9621	
	* 1.8749	* 2.2696	* 1.8684	* 2.2084	* 2.4060	* 2.1203	* 3.1498	
13	* 1.5060	* 1.6851	* 1.6098	* 1.7565	* 1.4512	* 0.8069	* 0.5214	
	* 2.3335	* 2.0734	* 2.1249	* 2.0116	* 2.1211	* 3.2678	* 5.4016	
14	* 1.9266	* 1.9342	* 1.8799	* 1.7275	* 0.9612	* 0.5089	*	
	* 1.9006	* 1.8787	* 1.9002	* 2.0306	* 3.1514	* 5.3942	*	
15	* 0.9530	* 0.9884	* 0.8979	* 0.8137	* F-SUB-Q			
	* 3.3593	* 3.3238	* 3.5021	* 3.8901	* M-SUB-Q			

AT 50% POWER, 350 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0175	* 1.3304	* 1.8596	* 1.5044	* 1.9071	* 1.4794	* 1.8856	* 0.9495
	* 3.3631	* 2.9362	* 2.1576	* 2.5358	* 2.0768	* 2.5390	* 2.0699	* 3.5957
9	* 1.3304	* 1.7436	* 1.4489	* 1.9318	* 1.5172	* 1.6533	* 1.8922	* 0.9871
	* 2.9362	* 2.3190	* 2.6633	* 2.0585	* 2.5043	* 2.2645	* 2.0567	* 3.5451
10	* 1.8596	* 1.4463	* 1.5151	* 1.6294	* 1.9025	* 1.5767	* 1.8362	* 0.9000
	* 2.1576	* 2.6692	* 2.5213	* 2.3454	* 2.0726	* 2.3554	* 2.1009	* 3.7520
11	* 1.5044	* 1.9285	* 1.6261	* 1.8120	* 1.5465	* 1.7165	* 1.6873	* 0.8108
	* 2.5358	* 2.0619	* 2.3495	* 2.1893	* 2.4273	* 2.2454	* 2.2631	* 4.2359
12	* 1.9071	* 1.5161	* 1.9004	* 1.5455	* 1.1282	* 1.4243	* 0.9614	
	* 2.0768	* 2.5063	* 2.0747	* 2.4290	* 2.6957	* 2.3799	* 3.4484	
13	* 1.4794	* 1.6528	* 1.5760	* 1.7160	* 1.4235	* 0.8075	* 0.5218	
	* 2.5390	* 2.2650	* 2.3562	* 2.2459	* 2.3808	* 3.6130	* 5.9238	
14	* 1.8856	* 1.8920	* 1.8358	* 1.6867	* 0.9611	* 0.5096		
	* 2.0699	* 2.0568	* 2.1013	* 2.2637	* 3.4480	* 5.9121		
15	* 0.9495	* 0.9871	* 0.8998	* 0.8105	* F-SUB-Q			
	* 3.5957	* 3.5452	* 3.7526	* 4.2372	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 199 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 350 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0206	* 1.3145	* 1.8684	* 1.4962	* 1.9100	* 1.4690	* 1.8900	* 0.9306
	* 3.6791	* 3.2927	* 2.3746	* 2.8156	* 2.2865	* 2.7946	* 2.2519	* 3.9873
9	* 1.3145	* 1.7560	* 1.4419	* 1.9413	* 1.5064	* 1.6451	* 1.8959	* 0.9671
	* 3.2927	* 2.5482	* 2.9567	* 2.2607	* 2.7845	* 2.4905	* 2.2428	* 3.9355
10	* 1.8684	* 1.4393	* 1.5080	* 1.6230	* 1.9108	* 1.5666	* 1.8392	* 0.8770
	* 2.3746	* 2.9633	* 2.7966	* 2.6023	* 2.2804	* 2.6118	* 2.3064	* 4.2141
11	* 1.4962	* 1.9381	* 1.6198	* 1.8222	* 1.5311	* 1.7205	* 1.6920	* 0.7933
	* 2.8156	* 2.2644	* 2.6069	* 2.4106	* 2.7164	* 2.4789	* 2.4915	* 4.7462
12	* 1.9100	* 1.5054	* 1.9088	* 1.5302	* 1.1262	* 1.4343	* 0.9423	*
	* 2.2865	* 2.7866	* 2.2825	* 2.7181	* 2.9802	* 2.6115	* 3.8742	*
13	* 1.4690	* 1.6447	* 1.5660	* 1.7200	* 1.4335	* 0.8065	* 0.5131	*
	* 2.7946	* 2.4911	* 2.6126	* 2.4794	* 2.6124	* 4.0435	* 6.6623	*
14	* 1.8900	* 1.8957	* 1.8388	* 1.6915	* 0.9419	* 0.5001	*	*
	* 2.2519	* 2.2430	* 2.3067	* 2.4921	* 3.8743	* 6.6630	*	*
15	* 0.9306	* 0.9670	* 0.8768	* 0.7930	* F-SUB-Q			
	* 3.9873	* 3.9356	* 4.2147	* 4.7479	* M-SUB-Q			

AT 50% POWER, 350 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0202	* 1.3047	* 1.8535	* 1.4781	* 1.8893	* 1.4489	* 1.8680	* 0.9180
	* 3.7435	* 3.3646	* 2.5542	* 3.0496	* 2.4965	* 3.1255	* 2.5315	* 4.4811
9	* 1.3047	* 1.7446	* 1.4269	* 1.9238	* 1.4874	* 1.6234	* 1.8736	* 0.9552
	* 3.3646	* 2.6663	* 3.1787	* 2.4691	* 3.0520	* 2.7993	* 2.5210	* 4.4171
10	* 1.8535	* 1.4243	* 1.4904	* 1.6057	* 1.8932	* 1.5458	* 1.8183	* 0.8660
	* 2.5542	* 3.1857	* 3.0426	* 2.8580	* 2.5008	* 2.9365	* 2.5922	* 4.7289
11	* 1.4781	* 1.9206	* 1.6025	* 1.8078	* 1.5171	* 1.7045	* 1.6761	* 0.7837
	* 3.0496	* 2.4718	* 2.8641	* 2.5106	* 2.8025	* 2.6214	* 2.7546	* 5.3513
12	* 1.8893	* 1.4865	* 1.8913	* 1.5162	* 1.1225	* 1.4273	* 0.9348	*
	* 2.4965	* 3.0543	* 2.5028	* 2.8035	* 3.1094	* 2.7413	* 4.0656	*
13	* 1.4489	* 1.6229	* 1.5451	* 1.7040	* 1.4266	* 0.8073	* 0.5107	*
	* 3.1255	* 2.8000	* 2.9376	* 2.6219	* 2.7422	* 4.2566	* 7.0450	*
14	* 1.8680	* 1.8735	* 1.8180	* 1.6756	* 0.9347	* 0.4974	*	*
	* 2.5315	* 2.5212	* 2.5925	* 2.7554	* 4.0646	* 7.0499	*	*
15	* 0.9180	* 0.9552	* 0.8658	* 0.7834	* F-SUB-Q			
	* 4.4811	* 4.4172	* 4.7295	* 5.3529	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 200 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 350 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0166 *	* 1.2992 *	* 1.8193 *	* 1.4521 *	* 1.8496 *	* 1.4209 *	* 1.8262 *	* 0.9101 *
	* 3.7991 *	* 3.3989 *	* 2.5093 *	* 2.9947 *	* 2.4580 *	* 3.0661 *	* 2.5003 *	* 4.3854 *
9	* 1.2992 *	* 1.7142 *	* 1.4050 *	* 1.8852 *	* 1.4661 *	* 1.5908 *	* 1.8321 *	* 0.9471 *
	* 3.3989 *	* 2.6844 *	* 3.1133 *	* 2.4304 *	* 2.9971 *	* 2.7498 *	* 2.4981 *	* 4.3226 *
10	* 1.8193 *	* 1.4025 *	* 1.4646 *	* 1.5794 *	* 1.8556 *	* 1.5166 *	* 1.7794 *	* 0.8633 *
	* 2.5093 *	* 3.1201 *	* 2.9858 *	* 2.8042 *	* 2.4943 *	* 2.8906 *	* 2.5953 *	* 4.6486 *
11	* 1.4521 *	* 1.8820 *	* 1.5762 *	* 1.7739 *	* 1.5032 *	* 1.6723 *	* 1.6441 *	* 0.7789 *
	* 2.9947 *	* 2.4331 *	* 2.8103 *	* 2.5846 *	* 2.8821 *	* 2.7058 *	* 2.8425 *	* 5.3518 *
12	* 1.8496 *	* 1.4645 *	* 1.8538 *	* 1.5024 *	* 1.1164 *	* 1.4055 *	* 0.9356 *	
	* 2.4580 *	* 2.9993 *	* 2.4967 *	* 2.8831 *	* 3.2046 *	* 2.8307 *	* 4.1235 *	
13	* 1.4209 *	* 1.5903 *	* 1.5159 *	* 1.6719 *	* 1.4048 *	* 0.8075 *	* 0.5125 *	
	* 3.0661 *	* 2.7505 *	* 2.8918 *	* 2.7063 *	* 2.8316 *	* 4.3440 *	* 7.1529 *	
14	* 1.8262 *	* 1.8320 *	* 1.7792 *	* 1.6437 *	* 0.9354 *	* 0.4995 *		
	* 2.5003 *	* 2.4983 *	* 2.5957 *	* 2.8433 *	* 4.1225 *	* 7.1537 *		
15	* 0.9101 *	* 0.9471 *	* 0.8631 *	* 0.7786 *	* F-SUB-Q			
	* 4.3854 *	* 4.3227 *	* 4.6492 *	* 5.3535 *	* M-SUB-Q			

AT 50% POWER, 350 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0116 *	* 1.2868 *	* 1.8314 *	* 1.4468 *	* 1.8548 *	* 1.4123 *	* 1.8305 *	* 0.8918 *
	* 3.6753 *	* 3.3157 *	* 2.4269 *	* 2.9225 *	* 2.3848 *	* 2.9969 *	* 2.4231 *	* 4.3322 *
9	* 1.2868 *	* 1.7294 *	* 1.4018 *	* 1.8979 *	* 1.4548 *	* 1.5849 *	* 1.8369 *	* 0.9280 *
	* 3.3157 *	* 2.5898 *	* 3.0360 *	* 2.3505 *	* 2.9316 *	* 2.6830 *	* 2.4213 *	* 4.2779 *
10	* 1.8314 *	* 1.3993 *	* 1.4614 *	* 1.5782 *	* 1.8683 *	* 1.5114 *	* 1.7873 *	* 0.8432 *
	* 2.4269 *	* 3.0427 *	* 2.9141 *	* 2.7342 *	* 2.4141 *	* 2.8258 *	* 2.5160 *	* 4.6243 *
11	* 1.4468 *	* 1.8947 *	* 1.5750 *	* 1.7898 *	* 1.4937 *	* 1.6837 *	* 1.6574 *	* 0.7654 *
	* 2.9225 *	* 2.3531 *	* 2.7402 *	* 2.5131 *	* 2.8160 *	* 2.6325 *	* 2.7513 *	* 5.3050 *
12	* 1.8548 *	* 1.4539 *	* 1.8665 *	* 1.4930 *	* 1.1097 *	* 1.4226 *	* 0.9234 *	
	* 2.3848 *	* 2.9337 *	* 2.4165 *	* 2.8167 *	* 3.1247 *	* 2.7385 *	* 4.0546 *	
13	* 1.4123 *	* 1.5844 *	* 1.5107 *	* 1.6834 *	* 1.4220 *	* 0.8072 *	* 0.5079 *	
	* 2.9969 *	* 2.6837 *	* 2.8271 *	* 2.6329 *	* 2.7393 *	* 4.2285 *	* 6.9302 *	
14	* 1.8305 *	* 1.8367 *	* 1.7870 *	* 1.6571 *	* 0.9232 *	* 0.4941 *		
	* 2.4231 *	* 2.4215 *	* 2.5163 *	* 2.7518 *	* 4.0539 *	* 6.9439 *		
15	* 0.8918 *	* 0.9280 *	* 0.8430 *	* 0.7651 *	* F-SUB-Q			
	* 4.3322 *	* 4.2780 *	* 4.6249 *	* 5.3069 *	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 201 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 350 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0171	* 1.2890	* 1.8336	* 1.4399	* 1.8492	* 1.4014	* 1.8224	* 0.8814
	* 3.3441	* 3.0147	* 2.2582	* 2.7331	* 2.2342	* 2.8132	* 2.2747	* 4.0594
9	* 1.2890	* 1.7366	* 1.3983	* 1.8981	* 1.4476	* 1.5747	* 1.8297	* 0.9160
	* 3.0147	* 2.3794	* 2.8275	* 2.1962	* 2.7442	* 2.5195	* 2.2728	* 4.0134
10	* 1.8336	* 1.3958	* 1.4576	* 1.5759	* 1.8711	* 1.5054	* 1.7850	* 0.8330
	* 2.2582	* 2.8335	* 2.7145	* 2.5546	* 2.2554	* 2.6460	* 2.3541	* 4.3302
11	* 1.4399	* 1.8950	* 1.5728	* 1.7982	* 1.4945	* 1.6918	* 1.6646	* 0.7589
	* 2.7331	* 2.1984	* 2.5599	* 2.2803	* 2.5636	* 2.3905	* 2.4978	* 4.9386
12	* 1.8492	* 1.4468	* 1.8693	* 1.4939	* 1.1165	* 1.4409	* 0.9263	
	* 2.2342	* 2.7459	* 2.2574	* 2.5641	* 2.8454	* 2.4855	* 3.7037	
13	* 1.4014	* 1.5742	* 1.5046	* 1.6915	* 1.4402	* 0.8196	* 0.5128	
	* 2.8132	* 2.5201	* 2.6471	* 2.3907	* 2.4861	* 3.8577	* 6.3440	
14	* 1.8224	* 1.8296	* 1.7848	* 1.6643	* 0.9258	* 0.4984		
	* 2.2747	* 2.2729	* 2.3543	* 2.4982	* 3.7040	* 6.3624		
15	* 0.8814	* 0.9160	* 0.8328	* 0.7586	* F-SUB-Q			
	* 4.0594	* 4.0135	* 4.3307	* 4.9401	* M-SUB-Q			

AT 50% POWER, 350 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0438	* 1.3004	* 1.8363	* 1.4344	* 1.8426	* 1.3920	* 1.8115	* 0.8762
	* 3.0388	* 2.7378	* 2.0249	* 2.4602	* 2.0091	* 2.5375	* 2.0493	* 3.6606
9	* 1.3004	* 1.7483	* 1.3982	* 1.8964	* 1.4447	* 1.5658	* 1.8200	* 0.9140
	* 2.7378	* 2.1458	* 2.5399	* 1.9728	* 2.4698	* 2.2710	* 2.0468	* 3.6067
10	* 1.8363	* 1.3957	* 1.4588	* 1.5777	* 1.8749	* 1.5041	* 1.7820	* 0.8337
	* 2.0249	* 2.5453	* 2.4400	* 2.2946	* 2.0244	* 2.3814	* 2.1168	* 3.8846
11	* 1.4344	* 1.8933	* 1.5746	* 1.8127	* 1.5091	* 1.7092	* 1.6754	* 0.7631
	* 2.4602	* 1.9748	* 2.2994	* 2.0841	* 2.3481	* 2.1891	* 2.2837	* 4.4221
12	* 1.8426	* 1.4432	* 1.8731	* 1.5085	* 1.1481	* 1.4773	* 0.9447	
	* 2.0091	* 2.4713	* 2.0262	* 2.3486	* 2.6157	* 2.2821	* 3.3869	
13	* 1.3920	* 1.5652	* 1.5033	* 1.7090	* 1.4767	* 0.8564	* 0.5289	
	* 2.5375	* 2.2716	* 2.3824	* 2.1893	* 2.2827	* 3.5438	* 5.8267	
14	* 1.8115	* 1.8199	* 1.7818	* 1.6752	* 0.9446	* 0.5139		
	* 2.0493	* 2.0469	* 2.1170	* 2.2839	* 3.3860	* 5.8446		
15	* 0.8762	* 0.9140	* 0.8335	* 0.7628	* F-SUB-Q			
	* 3.6606	* 3.6068	* 3.8850	* 4.4234	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 202 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 350 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1307	* 1.3255	* 1.8324	* 1.4295	* 1.8281	* 1.3820	* 1.7919	* 0.8793
	* 2.9732	* 2.6870	* 1.9955	* 2.4247	* 1.9852	* 2.5051	* 2.0290	* 3.5838
9	* 1.3255	* 1.7574	* 1.3989	* 1.8855	* 1.4553	* 1.5547	* 1.8019	* 0.9166
	* 2.6870	* 2.1124	* 2.4968	* 1.9489	* 2.4256	* 2.2421	* 2.0256	* 3.5271
10	* 1.8324	* 1.3963	* 1.4607	* 1.5801	* 1.8728	* 1.5040	* 1.7722	* 0.8420
	* 1.9955	* 2.5022	* 2.3964	* 2.2558	* 1.9965	* 2.3448	* 2.0905	* 3.7776
11	* 1.4295	* 1.8822	* 1.5769	* 1.8272	* 1.5377	* 1.7313	* 1.6846	* 0.7720
	* 2.4247	* 1.9509	* 2.2606	* 2.0669	* 2.3245	* 2.1717	* 2.2532	* 4.3068
12	* 1.8281	* 1.4537	* 1.8713	* 1.5371	* 1.2436	* 1.5444	* 0.9799	*
	* 1.9852	* 2.4284	* 1.9983	* 2.3249	* 2.5925	* 2.2651	* 3.3077	*
13	* 1.3820	* 1.5541	* 1.5032	* 1.7310	* 1.5439	* 0.9398	* 0.5568	*
	* 2.5051	* 2.2427	* 2.3459	* 2.1719	* 2.2656	* 3.4815	* 5.7062	*
14	* 1.7919	* 1.8018	* 1.7721	* 1.6843	* 0.9799	* 0.5414	*	*
	* 2.0290	* 2.0257	* 2.0907	* 2.2535	* 3.3064	* 5.7198	*	*
15	* 0.8793	* 0.9166	* 0.8418	* 0.7717	* F-SUB-Q			
	* 3.5838	* 3.5273	* 3.7780	* 4.3081	* M-SUB-Q			

AT 50% POWER, 350 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2150	* 1.3549	* 1.8704	* 1.4387	* 1.8543	* 1.3876	* 1.8155	* 0.8668
	* 2.7073	* 2.4295	* 1.8001	* 2.2131	* 1.7979	* 2.2915	* 1.8384	* 3.3347
9	* 1.3549	* 1.8121	* 1.4132	* 1.9215	* 1.4561	* 1.5668	* 1.8272	* 0.9034
	* 2.4295	* 1.8992	* 2.2762	* 1.7591	* 2.2206	* 2.0439	* 1.8341	* 3.2897
10	* 1.8704	* 1.4107	* 1.4804	* 1.6029	* 1.9200	* 1.5233	* 1.8060	* 0.8285
	* 1.8001	* 2.2811	* 2.1871	* 2.0509	* 1.7986	* 2.1342	* 1.8870	* 3.5322
11	* 1.4387	* 1.9182	* 1.5997	* 1.8923	* 1.5721	* 1.7954	* 1.7355	* 0.7670
	* 2.2131	* 1.7612	* 2.0553	* 1.8494	* 2.0980	* 1.9440	* 2.0196	* 3.9975
12	* 1.8543	* 1.4546	* 1.9186	* 1.5720	* 1.3679	* 1.6741	* 0.9969	*
	* 1.7979	* 2.2219	* 1.8002	* 2.0983	* 2.3587	* 2.0471	* 3.0523	*
13	* 1.3876	* 1.5662	* 1.5225	* 1.7952	* 1.6737	* 1.0233	* 0.5749	*
	* 2.2914	* 2.0444	* 2.1352	* 1.9441	* 2.0475	* 3.2149	* 5.3124	*
14	* 1.8155	* 1.8271	* 1.8058	* 1.7352	* 0.9966	* 0.5579	*	*
	* 1.8384	* 1.8342	* 1.8871	* 2.0198	* 3.0521	* 5.3364	*	*
15	* 0.8668	* 0.9034	* 0.8283	* 0.7667	* F-SUB-Q			
	* 3.3347	* 3.2898	* 3.5326	* 3.9988	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 203 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 350 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2532 *	* 1.3698 *	* 1.8755 *	* 1.4351 *	* 1.8513 *	* 1.3824 *	* 1.8107 *	* 0.8611 *
	* 2.4939 *	* 2.2472 *	* 1.6696 *	* 2.0643 *	* 1.6742 *	* 2.1396 *	* 1.7133 *	* 3.1254 *
9	* 1.3698 *	* 1.8324 *	* 1.4139 *	* 1.9225 *	* 1.4568 *	* 1.5636 *	* 1.8242 *	* 0.8981 *
	* 2.2472 *	* 1.7516 *	* 2.1172 *	* 1.6353 *	* 2.0684 *	* 1.9046 *	* 1.7079 *	* 3.0810 *
10	* 1.8755 *	* 1.4113 *	* 1.4849 *	* 1.6079 *	* 1.9340 *	* 1.5277 *	* 1.8102 *	* 0.8258 *
	* 1.6696 *	* 2.1218 *	* 2.0323 *	* 1.9035 *	* 1.6664 *	* 1.9807 *	* 1.7507 *	* 3.3003 *
11	* 1.4351 *	* 1.9186 *	* 1.6046 *	* 1.9178 *	* 1.5972 *	* 1.8235 *	* 1.7545 *	* 0.7682 *
	* 2.0643 *	* 1.6380 *	* 1.9069 *	* 1.7150 *	* 1.9443 *	* 1.7987 *	* 1.8567 *	* 3.7186 *
12	* 1.8513 *	* 1.4553 *	* 1.9326 *	* 1.5971 *	* 1.4327 *	* 1.7376 *	* 1.0160 *	
	* 1.6742 *	* 2.0696 *	* 1.6679 *	* 1.9446 *	* 2.1587 *	* 1.8730 *	* 2.8215 *	
13	* 1.3824 *	* 1.5630 *	* 1.5268 *	* 1.8233 *	* 1.7371 *	* 1.0726 *	* 0.5915 *	
	* 2.1396 *	* 1.9052 *	* 1.9817 *	* 1.7988 *	* 1.8734 *	* 2.9420 *	* 4.8910 *	
14	* 1.8107 *	* 1.8240 *	* 1.8100 *	* 1.7543 *	* 1.0157 *	* 0.5738 *		
	* 1.7133 *	* 1.7079 *	* 1.7508 *	* 1.8569 *	* 2.8213 *	* 4.9149 *		
15	* 0.8611 *	* 0.8981 *	* 0.8256 *	* 0.7679 *	F-SUB-Q			
	* 3.1254 *	* 3.0812 *	* 3.3007 *	* 3.7199 *	M-SUB-Q			

AT 50% POWER, 350 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2600 *	* 1.3551 *	* 1.8302 *	* 1.4093 *	* 1.8035 *	* 1.3579 *	* 1.7627 *	* 0.8587 *
	* 2.3540 *	* 2.1135 *	* 1.6055 *	* 1.9793 *	* 1.6161 *	* 2.0512 *	* 1.6559 *	* 2.9609 *
9	* 1.3551 *	* 1.7946 *	* 1.3915 *	* 1.8698 *	* 1.4482 *	* 1.5355 *	* 1.7794 *	* 0.8965 *
	* 2.1135 *	* 1.6677 *	* 2.0214 *	* 1.5799 *	* 1.9626 *	* 1.8254 *	* 1.6486 *	* 2.9102 *
10	* 1.8302 *	* 1.3897 *	* 1.4719 *	* 1.5831 *	* 1.8898 *	* 1.5061 *	* 1.7688 *	* 0.8296 *
	* 1.6055 *	* 2.0258 *	* 1.9348 *	* 1.8150 *	* 1.6027 *	* 1.8867 *	* 1.6834 *	* 3.0953 *
11	* 1.4093 *	* 1.8658 *	* 1.5798 *	* 1.8829 *	* 1.5837 *	* 1.7970 *	* 1.7223 *	* 0.7713 *
	* 1.9793 *	* 1.5824 *	* 1.8184 *	* 1.6284 *	* 1.8327 *	* 1.7059 *	* 1.7684 *	* 3.4840 *
12	* 1.8035 *	* 1.4466 *	* 1.8883 *	* 1.5836 *	* 1.4334 *	* 1.7245 *	* 1.0313 *	
	* 1.6161 *	* 1.9650 *	* 1.6044 *	* 1.8336 *	* 2.0636 *	* 1.8017 *	* 2.6305 *	
13	* 1.3579 *	* 1.5349 *	* 1.5053 *	* 1.7968 *	* 1.7240 *	* 1.0890 *	* 0.6032 *	
	* 2.0512 *	* 1.8260 *	* 1.8877 *	* 1.7061 *	* 1.8021 *	* 2.7759 *	* 4.5915 *	
14	* 1.7627 *	* 1.7792 *	* 1.7686 *	* 1.7220 *	* 1.0312 *	* 0.5857 *		
	* 1.6559 *	* 1.6487 *	* 1.6836 *	* 1.7686 *	* 2.6296 *	* 4.6101 *		
15	* 0.8587 *	* 0.8964 *	* 0.8294 *	* 0.7710 *	F-SUB-Q			
	* 2.9609 *	* 2.9103 *	* 3.0957 *	* 3.4852 *	M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 204 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 350 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2261	* 1.3241	* 1.7870	* 1.3723	* 1.7612	* 1.3262	* 1.7226	* 0.8227 *
	* 2.2539	* 2.0420	* 1.5569	* 1.9304	* 1.5721	* 1.9990	* 1.6117	* 2.9409 *
9	* 1.3241	* 1.7568	* 1.3561	* 1.8237	* 1.3976	* 1.5038	* 1.7416	* 0.8597 *
	* 2.0420	* 1.6074	* 1.9666	* 1.5368	* 1.9246	* 1.7727	* 1.6030	* 2.8924 *
10	* 1.7870	* 1.3544	* 1.4361	* 1.5472	* 1.8480	* 1.4759	* 1.7328	* 0.7937 *
	* 1.5569	* 1.9696	* 1.8723	* 1.7585	* 1.5510	* 1.8234	* 1.6304	* 3.0801 *
11	* 1.3723	* 1.8197	* 1.5439	* 1.8414	* 1.5540	* 1.7680	* 1.6901	* 0.7419 *
	* 1.9304	* 1.5395	* 1.7619	* 1.5704	* 1.7635	* 1.6354	* 1.7058	* 3.4395 *
12	* 1.7612	* 1.3960	* 1.8465	* 1.5539	* 1.4154	* 1.7005	* 0.9961	*
	* 1.5721	* 1.9258	* 1.5525	* 1.7639	* 1.9674	* 1.7201	* 2.5647	*
13	* 1.3262	* 1.5032	* 1.4750	* 1.7677	* 1.7000	* 1.0617	* 0.5842	*
	* 1.9990	* 1.7732	* 1.8245	* 1.6356	* 1.7205	* 2.7057	* 4.4936	*
14	* 1.7226	* 1.7413	* 1.7325	* 1.6898	* 0.9953	* 0.5666	*	
	* 1.6117	* 1.6032	* 1.6306	* 1.7061	* 2.5658	* 4.5160	*	
15	* 0.8227	* 0.8597	* 0.7936	* 0.7416	* F-SUB-Q			
	* 2.9409	* 2.8925	* 3.0805	* 3.4410	* M-SUB-Q			

AT 50% POWER, 350 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1424	* 1.2274	* 1.6280	* 1.2698	* 1.6088	* 1.2311	* 1.5725	* 0.7609 *
	* 2.3086	* 2.0939	* 1.6356	* 2.0025	* 1.6520	* 2.0720	* 1.6979	* 3.0663 *
9	* 1.2274	* 1.6033	* 1.2559	* 1.6613	* 1.2918	* 1.3920	* 1.5914	* 0.7928 *
	* 2.0939	* 1.6736	* 2.0338	* 1.6166	* 1.9906	* 1.8415	* 1.6871	* 3.0241 *
10	* 1.6280	* 1.2541	* 1.3368	* 1.4340	* 1.6870	* 1.3735	* 1.5832	* 0.7333 *
	* 1.6356	* 2.0375	* 1.9262	* 1.8150	* 1.6222	* 1.8771	* 1.7117	* 3.2109 *
11	* 1.2698	* 1.6577	* 1.4308	* 1.6825	* 1.4420	* 1.6223	* 1.5427	* 0.6848 *
	* 2.0025	* 1.6200	* 1.8188	* 1.6402	* 1.8173	* 1.7049	* 1.7847	* 3.5807 *
12	* 1.6088	* 1.2911	* 1.6855	* 1.4418	* 1.3191	* 1.5572	* 0.9251	*
	* 1.6520	* 1.9919	* 1.6235	* 1.8177	* 2.0105	* 1.7899	* 2.6442	*
13	* 1.2311	* 1.3915	* 1.3726	* 1.6221	* 1.5567	* 0.9809	* 0.5440	*
	* 2.0720	* 1.8421	* 1.8782	* 1.7051	* 1.7904	* 2.7879	* 4.6130	*
14	* 1.5725	* 1.5912	* 1.5829	* 1.5423	* 0.9242	* 0.5275	*	
	* 1.6979	* 1.6872	* 1.7119	* 1.7851	* 2.6460	* 4.6383	*	
15	* 0.7609	* 0.7928	* 0.7332	* 0.6845	* F-SUB-Q			
	* 3.0663	* 3.0242	* 3.2113	* 3.5822	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 205 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 350 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9368	* 1.0057	* 1.3132	* 1.0365	* 1.2980	* 1.0067	* 1.2628	* 0.6222 *
	* 2.7012	* 2.4620	* 1.9593	* 2.3761	* 1.9830	* 2.4588	* 2.0509	* 3.6480 *
9	* 1.0057	* 1.3102	* 1.0291	* 1.3632	* 1.0620	* 1.1307	* 1.2771	* 0.6457 *
	* 2.4620	* 1.9717	* 2.4006	* 1.9045	* 2.3423	* 2.1989	* 2.0377	* 3.6113 *
10	* 1.3132	* 1.0275	* 1.0989	* 1.1785	* 1.3833	* 1.1278	* 1.2697	* 0.5975 *
	* 1.9593	* 2.4048	* 2.2653	* 2.1336	* 1.9068	* 2.2129	* 2.0661	* 3.8337 *
11	* 1.0365	* 1.3607	* 1.1760	* 1.3795	* 1.1818	* 1.3025	* 1.2339	* 0.5571 *
	* 2.3761	* 1.9079	* 2.1378	* 1.9214	* 2.1306	* 2.0438	* 2.1554	* 4.2710 *
12	* 1.2980	* 1.0614	* 1.3822	* 1.1817	* 1.0639	* 1.2534	* 0.7577 *	
	* 1.9830	* 2.3440	* 1.9082	* 2.1311	* 2.4109	* 2.1501	* 3.1283 *	
13	* 1.0067	* 1.1303	* 1.1271	* 1.3023	* 1.2531	* 0.7873	* 0.4487 *	
	* 2.4588	* 2.1996	* 2.2143	* 2.0441	* 2.1506	* 3.3617	* 5.4239 *	
14	* 1.2628	* 1.2769	* 1.2695	* 1.2336	* 0.7568	* 0.4353 *		
	* 2.0509	* 2.0378	* 2.0664	* 2.1559	* 3.1309	* 5.4502 *		
15	* 0.6222	* 0.6456	* 0.5973	* 0.5569	* F-SUB-Q			
	* 3.6480	* 3.6114	* 3.8342	* 4.2728	* M-SUB-Q			

AT 50% POWER, 350 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.4290	* 0.4586	* 0.5525	* 0.4733	* 0.5474	* 0.4467	* 0.4988	* 0.2721 *
	* 5.7068	* 5.2335	* 4.5174	* 5.0508	* 4.5664	* 5.3731	* 5.0440	* 8.1204 *
9	* 0.4586	* 0.5360	* 0.4694	* 0.5647	* 0.4858	* 0.4714	* 0.5033	* 0.2794 *
	* 5.2335	* 4.6629	* 5.1086	* 4.4566	* 4.9667	* 5.1177	* 5.0150	* 8.1249 *
10	* 0.5525	* 0.4687	* 0.4714	* 0.5172	* 0.5726	* 0.4796	* 0.4999	* 0.2632 *
	* 4.5174	* 5.1171	* 5.1145	* 4.7102	* 4.4552	* 5.0356	* 5.0922	* 8.4598 *
11	* 0.4733	* 0.5638	* 0.5162	* 0.5711	* 0.5024	* 0.5438	* 0.4811	* 0.2407 *
	* 5.0508	* 4.4639	* 4.7188	* 4.4803	* 4.8425	* 4.7389	* 5.3564	* 9.6112 *
12	* 0.5474	* 0.4855	* 0.5722	* 0.5023	* 0.4461	* 0.4945	* 0.3315 *	
	* 4.5664	* 4.9706	* 4.4585	* 4.8441	* 5.5337	* 5.2757	* 6.9246 *	
13	* 0.4467	* 0.4713	* 0.4793	* 0.5437	* 0.4943	* 0.3527	* 0.1974 *	
	* 5.3731	* 5.1190	* 5.0387	* 4.7400	* 5.2773	* 7.2949	* 12.0118 *	
14	* 0.4988	* 0.5032	* 0.4998	* 0.4809	* 0.3311	* 0.1942 *		
	* 5.0440	* 5.0156	* 5.0932	* 5.3581	* 6.9308	* 11.9024 *		
15	* 0.2721	* 0.2794	* 0.2632	* 0.2406	* F-SUB-Q			
	* 8.1204	* 8.1251	* 8.4607	* 9.6152	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 206 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 500 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.3991	* 0.5144	* 0.6550	* 0.6114	* 0.7018	* 0.5603	* 0.4786	* 0.2592
	* 4.3425	* 4.4155	* 3.7626	* 3.8277	* 3.6121	* 3.9723	* 3.9209	* 5.5384
9	* 0.5144	* 0.5829	* 0.5512	* 0.6930	* 0.6273	* 0.6030	* 0.6000	* 0.3427
	* 4.4155	* 4.0402	* 4.0354	* 3.6239	* 3.7552	* 3.8203	* 3.9169	* 5.6043
10	* 0.6550	* 0.5510	* 0.4732	* 0.6246	* 0.7029	* 0.6266	* 0.6404	* 0.3491
	* 3.7626	* 4.0403	* 3.9576	* 3.6948	* 3.5975	* 3.6930	* 3.9195	* 5.8556
11	* 0.6114	* 0.6928	* 0.6241	* 0.6543	* 0.6005	* 0.6732	* 0.6226	* 0.3391
	* 3.8277	* 3.6260	* 3.6997	* 3.8228	* 3.8163	* 3.7059	* 4.0001	* 6.3424
12	* 0.7018	* 0.6272	* 0.7028	* 0.6004	* 0.4453	* 0.5514	* 0.4225	*
	* 3.6121	* 3.7562	* 3.5978	* 3.8170	* 4.0930	* 4.1878	* 4.8334	*
13	* 0.5603	* 0.6029	* 0.6265	* 0.6731	* 0.5511	* 0.3666	* 0.2570	*
	* 3.9723	* 3.8209	* 3.6935	* 3.7064	* 4.1893	* 5.3512	* 8.1117	*
14	* 0.4786	* 0.6000	* 0.6403	* 0.6224	* 0.4221	* 0.2504	*	*
	* 3.9209	* 3.9171	* 3.9200	* 4.0012	* 4.8324	* 8.1087	*	*
15	* 0.2592	* 0.3427	* 0.3490	* 0.3390	* F-SUB-Q			
	* 5.5384	* 5.6043	* 5.8556	* 6.3442	* M-SUB-Q			

AT 50% POWER, 500 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.7464	* 0.9802	* 1.3062	* 1.1608	* 1.3937	* 1.0858	* 0.9858	* 0.5217
	* 2.5059	* 2.3845	* 1.9406	* 2.0751	* 1.8712	* 2.0963	* 1.9034	* 2.8136
9	* 0.9802	* 1.1979	* 1.0512	* 1.4052	* 1.1900	* 1.2184	* 1.2698	* 0.6949
	* 2.3845	* 2.0226	* 2.1710	* 1.8294	* 2.0369	* 1.9147	* 1.8979	* 2.8486
10	* 1.3062	* 1.0505	* 0.9397	* 1.2191	* 1.4363	* 1.2682	* 1.3623	* 0.7083
	* 1.9406	* 2.1739	* 2.0330	* 1.9402	* 1.8393	* 1.9089	* 1.9253	* 2.9902
11	* 1.1608	* 1.4050	* 1.2182	* 1.3327	* 1.2127	* 1.3555	* 1.3331	* 0.6911
	* 2.0751	* 1.8313	* 1.9429	* 1.9115	* 1.9453	* 1.9283	* 1.9572	* 3.2615
12	* 1.3937	* 1.1900	* 1.4362	* 1.2126	* 0.9000	* 1.1683	* 0.8459	*
	* 1.8712	* 2.0380	* 1.8406	* 1.9459	* 2.0685	* 2.0074	* 2.5294	*
13	* 1.0858	* 1.2183	* 1.2681	* 1.3554	* 1.1677	* 0.7176	* 0.5135	*
	* 2.0963	* 1.9150	* 1.9091	* 1.9285	* 2.0080	* 2.8228	* 4.1461	*
14	* 0.9858	* 1.2698	* 1.3621	* 1.3328	* 0.8450	* 0.5005	*	*
	* 1.9034	* 1.8980	* 1.9255	* 1.9576	* 2.5291	* 4.1421	*	*
15	* 0.5217	* 0.6948	* 0.7081	* 0.6909	* F-SUB-Q			
	* 2.8136	* 2.8486	* 2.9902	* 3.2622	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 207 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 500 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.8767	* 1.1390	* 1.5440	* 1.3463	* 1.6386	* 1.2524	* 1.1791	* 0.6302
	* 2.2739	* 2.0999	* 1.6806	* 1.8319	* 1.6286	* 1.8534	* 1.6410	* 2.4237
9	* 1.1390	* 1.3903	* 1.2391	* 1.6304	* 1.3719	* 1.3946	* 1.4957	* 0.8320
	* 2.0999	* 1.7800	* 1.9115	* 1.6119	* 1.8085	* 1.6762	* 1.6335	* 2.4247
10	* 1.5440	* 1.2389	* 1.1130	* 1.4081	* 1.6657	* 1.4602	* 1.6036	* 0.8350
	* 1.6806	* 1.9143	* 1.7962	* 1.7202	* 1.6244	* 1.7061	* 1.6696	* 2.5453
11	* 1.3463	* 1.6300	* 1.4071	* 1.5361	* 1.4019	* 1.5914	* 1.5695	* 0.8231
	* 1.8319	* 1.6137	* 1.7227	* 1.6795	* 1.7186	* 1.6860	* 1.7049	* 2.8135
12	* 1.6386	* 1.3719	* 1.6656	* 1.4018	* 1.0575	* 1.3687	* 0.9995	*
	* 1.6286	* 1.8096	* 1.6255	* 1.7192	* 1.8247	* 1.7457	* 2.1967	*
13	* 1.2524	* 1.3945	* 1.4603	* 1.5913	* 1.3681	* 0.8403	* 0.5989	*
	* 1.8534	* 1.6763	* 1.7062	* 1.6861	* 1.7462	* 2.4067	* 3.6100	*
14	* 1.1791	* 1.4957	* 1.6034	* 1.5692	* 0.9988	* 0.5872	*	*
	* 1.6410	* 1.6336	* 1.6698	* 1.7052	* 2.1957	* 3.5853	*	*
15	* 0.6302	* 0.8320	* 0.8348	* 0.8229	* F-SUB-Q			
	* 2.4237	* 2.4246	* 2.5453	* 2.8140	* M-SUB-Q			

AT 50% POWER, 500 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9205	* 1.2058	* 1.6758	* 1.4279	* 1.7692	* 1.3191	* 1.2735	* 0.6638
	* 2.2335	* 2.0516	* 1.5987	* 1.7813	* 1.5546	* 1.8004	* 1.5515	* 2.3705
9	* 1.2058	* 1.5140	* 1.3109	* 1.7735	* 1.4499	* 1.4705	* 1.6223	* 0.8701
	* 2.0516	* 1.6906	* 1.8585	* 1.5282	* 1.7633	* 1.6197	* 1.5468	* 2.3728
10	* 1.6758	* 1.3107	* 1.1738	* 1.4953	* 1.8011	* 1.5424	* 1.7362	* 0.8737
	* 1.5987	* 1.8614	* 1.7504	* 1.6702	* 1.5409	* 1.6594	* 1.5842	* 2.5162
11	* 1.4279	* 1.7732	* 1.4943	* 1.6668	* 1.4818	* 1.7099	* 1.6987	* 0.8587
	* 1.7813	* 1.5299	* 1.6724	* 1.5930	* 1.6679	* 1.6076	* 1.6163	* 2.7716
12	* 1.7692	* 1.4499	* 1.8010	* 1.4817	* 1.1057	* 1.4760	* 1.0351	*
	* 1.5546	* 1.7644	* 1.5419	* 1.6686	* 1.7801	* 1.6604	* 2.1768	*
13	* 1.3191	* 1.4705	* 1.5426	* 1.7097	* 1.4754	* 0.8815	* 0.6160	*
	* 1.8004	* 1.6198	* 1.6594	* 1.6077	* 1.6609	* 2.3521	* 3.5940	*
14	* 1.2735	* 1.6223	* 1.7362	* 1.6984	* 1.0348	* 0.6042	*	*
	* 1.5515	* 1.5468	* 1.5843	* 1.6165	* 2.1752	* 3.5677	*	*
15	* 0.6638	* 0.8701	* 0.8735	* 0.8585	* F-SUB-Q			
	* 2.3705	* 2.3727	* 2.5162	* 2.7721	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 208 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 500 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9323	* 1.2230	* 1.7062	* 1.4396	* 1.7925	* 1.3279	* 1.3029	* 0.6812
	* 2.3251	* 2.1189	* 1.6433	* 1.8427	* 1.5992	* 1.8676	* 1.5926	* 2.4475
9	* 1.2230	* 1.5448	* 1.3342	* 1.8061	* 1.4586	* 1.4729	* 1.6503	* 0.8840
	* 2.1189	* 1.7407	* 1.9239	* 1.5659	* 1.8241	* 1.6778	* 1.5890	* 2.4450
10	* 1.7062	* 1.3340	* 1.1903	* 1.5138	* 1.8263	* 1.5443	* 1.7552	* 0.8819
	* 1.6433	* 1.9268	* 1.8215	* 1.7234	* 1.5775	* 1.7193	* 1.6232	* 2.5919
11	* 1.4396	* 1.8059	* 1.5129	* 1.6929	* 1.4860	* 1.7209	* 1.7152	* 0.8651
	* 1.8427	* 1.5676	* 1.7257	* 1.6346	* 1.7269	* 1.6515	* 1.6553	* 2.8504
12	* 1.7925	* 1.4587	* 1.8261	* 1.4859	* 1.1087	* 1.4843	* 1.0376	*
	* 1.5992	* 1.8251	* 1.5783	* 1.7275	* 1.8526	* 1.7088	* 2.2462	*
13	* 1.3279	* 1.4729	* 1.5447	* 1.7208	* 1.4838	* 0.8827	* 0.6138	*
	* 1.8676	* 1.6779	* 1.7193	* 1.6515	* 1.7092	* 2.4282	* 3.7277	*
14	* 1.3029	* 1.6503	* 1.7552	* 1.7150	* 1.0373	* 0.6022	*	*
	* 1.5926	* 1.5890	* 1.6232	* 1.6555	* 2.2442	* 3.7000	*	*
15	* 0.6812	* 0.8840	* 0.8817	* 0.8650	* F-SUB-Q			
	* 2.4475	* 2.4448	* 2.5918	* 2.8507	* M-SUB-Q			

AT 50% POWER, 500 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9387	* 1.2327	* 1.7131	* 1.4361	* 1.7902	* 1.3311	* 1.3352	* 0.7093
	* 2.4581	* 2.2263	* 1.7300	* 1.9384	* 1.6788	* 1.9757	* 1.6791	* 2.5742
9	* 1.2327	* 1.5574	* 1.3484	* 1.8104	* 1.4524	* 1.4720	* 1.6618	* 0.8948
	* 2.2263	* 1.8375	* 2.0331	* 1.6446	* 1.9164	* 1.7728	* 1.6745	* 2.5680
10	* 1.7131	* 1.3482	* 1.2061	* 1.5210	* 1.8207	* 1.5300	* 1.7429	* 0.8840
	* 1.7300	* 2.0345	* 1.9328	* 1.8114	* 1.6489	* 1.8077	* 1.7003	* 2.7118
11	* 1.4361	* 1.8102	* 1.5200	* 1.6920	* 1.4741	* 1.6997	* 1.6963	* 0.8624
	* 1.9384	* 1.6461	* 1.8135	* 1.7244	* 1.8287	* 1.7488	* 1.7499	* 2.9961
12	* 1.7902	* 1.4525	* 1.8204	* 1.4739	* 1.1002	* 1.4616	* 1.0287	*
	* 1.6788	* 1.9172	* 1.6496	* 1.8293	* 1.9742	* 1.8142	* 2.3697	*
13	* 1.3311	* 1.4720	* 1.5303	* 1.6997	* 1.4611	* 0.8708	* 0.6057	*
	* 1.9757	* 1.7729	* 1.8075	* 1.7487	* 1.8146	* 2.5735	* 3.9482	*
14	* 1.3352	* 1.6619	* 1.7429	* 1.6961	* 1.0285	* 0.5941	*	*
	* 1.6791	* 1.6745	* 1.7002	* 1.7500	* 2.3675	* 3.9197	*	*
15	* 0.7093	* 0.8948	* 0.8838	* 0.8623	* F-SUB-Q			
	* 2.5742	* 2.5678	* 2.7117	* 2.9963	* M-SUB-Q			

CNEI-0400-355
Appendix A, Rev. 0
Page 209 of 312

F-SUB-O & M-SUB-O VALUES (F-SUB-O OP MARGIN) - NORMAL OPERATION

	H	G	F	E	D	C	B	A
8	* 0.9433	* 1.2434	* 1.7419	* 1.4434	* 1.8075	* 1.3537	* 1.4418	* 0.7763
	* 2.6026	* 2.3485	* 1.8075	* 2.0412	* 1.7586	* 2.0777	* 1.7596	* 2.7383
9	* 1.2434	* 1.5960	* 1.3605	* 1.8386	* 1.4570	* 1.4967	* 1.7112	* 0.9072
	* 2.3485	* 1.9192	* 2.1334	* 1.7158	* 2.0218	* 1.8588	* 1.7496	* 2.7260
10	* 1.7419	* 1.3602	* 1.2718	* 1.5308	* 1.8372	* 1.5281	* 1.7544	* 0.8845
	* 1.8075	* 2.1366	* 2.0295	* 1.9041	* 1.7281	* 1.9102	* 1.7761	* 2.8619
11	* 1.4434	* 1.8383	* 1.5296	* 1.7151	* 1.4738	* 1.6922	* 1.6926	* 0.8534
	* 2.0412	* 1.7174	* 1.9065	* 1.8161	* 1.9405	* 1.8594	* 1.8555	* 3.2025
12	* 1.8075	* 1.4570	* 1.8369	* 1.4735	* 1.0875	* 1.4488	* 1.0069	*
	* 1.7586	* 2.0226	* 1.7289	* 1.9411	* 2.1102	* 1.9243	* 2.5635	*
13	* 1.3537	* 1.4967	* 1.5283	* 1.6922	* 1.4483	* 0.8523	* 0.5903	*
	* 2.0777	* 1.8589	* 1.9100	* 1.8593	* 1.9247	* 2.7565	* 4.2496	*
14	* 1.4418	* 1.7113	* 1.7545	* 1.6925	* 1.0069	* 0.5784	*	
	* 1.7596	* 1.7495	* 1.7760	* 1.8555	* 2.5609	* 4.2236	*	
15	* 0.7763	* 0.9072	* 0.8844	* 0.8534	* F-SUB-Q			
	* 2.7383	* 2.7258	* 2.8617	* 3.2027	* M-SUB-Q			

	H	G	F	E	D	C	B	A
8	0.9525	1.2621	1.7691	1.4532	1.8225	1.3839	1.6589	0.8770
	2.7964	2.5239	1.9363	2.1942	1.8854	2.2129	1.8623	2.9009
9	1.2621	1.6376	1.3820	1.8633	1.4647	1.5290	1.7672	0.9292
	2.5239	2.0531	2.2907	1.8373	2.1755	1.9825	1.8571	2.8910
10	1.7691	1.3815	1.3786	1.5498	1.8502	1.5277	1.7741	0.8961
	1.9363	2.2942	2.1800	2.0480	1.8489	2.0447	1.9013	3.0650
11	1.4532	1.8628	1.5482	1.7372	1.4811	1.6803	1.6833	0.8498
	2.1942	1.8391	2.0506	1.9459	2.0856	2.0055	1.9961	3.4238
12	1.8225	1.4645	1.8497	1.4807	1.0797	1.4314	0.9922	
	1.8854	2.1760	1.8495	2.0862	2.2639	2.0586	2.7643	
13	1.3839	1.5290	1.5279	1.6803	1.4309	0.8372	0.5791	
	2.2129	1.9826	2.0444	2.0054	2.0589	2.9630	4.5662	
14	1.6589	1.7673	1.7743	1.6833	0.9922	0.5669	*	
	1.8623	1.8570	1.9012	1.9961	2.7612	4.5422	*	
15	0.8770	0.9292	0.8961	0.8498	F-SUB-Q			
	2.9009	2.8907	3.0648	3.4239	M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 210 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 500 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9606	* 1.2776	* 1.7977	* 1.4642	* 1.8420	* 1.4113	* 1.7957	* 0.9367
	* 3.0496	* 2.7427	* 2.0819	* 2.3601	* 2.0190	* 2.4005	* 2.0084	* 3.1495
9	* 1.2776	* 1.6891	* 1.4033	* 1.8905	* 1.4744	* 1.5786	* 1.8159	* 0.9738
	* 2.7427	* 2.2200	* 2.4765	* 1.9691	* 2.3398	* 2.1477	* 2.0059	* 3.1440
10	* 1.7977	* 1.4016	* 1.4497	* 1.5685	* 1.8688	* 1.5314	* 1.7963	* 0.9071
	* 2.0819	* 2.4800	* 2.3663	* 2.2018	* 1.9820	* 2.2043	* 2.0293	* 3.3221
11	* 1.4642	* 1.8897	* 1.5667	* 1.7687	* 1.4851	* 1.6754	* 1.6812	* 0.8440
	* 2.3601	* 1.9704	* 2.2044	* 2.0941	* 2.2705	* 2.1762	* 2.1601	* 3.7201
12	* 1.8420	* 1.4742	* 1.8679	* 1.4848	* 1.0725	* 1.4211	* 0.9768	*
	* 2.0190	* 2.3405	* 1.9827	* 2.2710	* 2.4664	* 2.2298	* 3.0208	*
13	* 1.4113	* 1.5785	* 1.5315	* 1.6754	* 1.4206	* 0.8237	* 0.5685	*
	* 2.4005	* 2.1478	* 2.2041	* 2.1761	* 2.2301	* 3.2281	* 4.9812	*
14	* 1.7957	* 1.8160	* 1.7965	* 1.6812	* 0.9769	* 0.5559	*	*
	* 2.0084	* 2.0058	* 2.0291	* 2.1600	* 3.0173	* 4.9602	*	*
15	* 0.9367	* 0.9738	* 0.9071	* 0.8438	* F-SUB-Q			
	* 3.1495	* 3.1438	* 3.3218	* 3.7205	* M-SUB-Q			

AT 50% POWER, 500 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9690	* 1.2934	* 1.7849	* 1.4571	* 1.8234	* 1.4237	* 1.8139	* 0.9701
	* 3.3543	* 2.9824	* 2.3034	* 2.6008	* 2.2344	* 2.6149	* 2.1999	* 3.3864
9	* 1.2934	* 1.6855	* 1.4129	* 1.8721	* 1.4761	* 1.5847	* 1.8198	* 1.0058
	* 2.9824	* 2.4495	* 2.7076	* 2.1799	* 2.5662	* 2.3417	* 2.1924	* 3.3736
10	* 1.7849	* 1.4123	* 1.4544	* 1.5671	* 1.8463	* 1.5142	* 1.7770	* 0.9274
	* 2.3034	* 2.7092	* 2.6001	* 2.4238	* 2.2014	* 2.4439	* 2.2429	* 3.5497
11	* 1.4571	* 1.8714	* 1.5654	* 1.7514	* 1.4860	* 1.6431	* 1.6482	* 0.8477
	* 2.6008	* 2.1814	* 2.4263	* 2.3254	* 2.5049	* 2.4344	* 2.4140	* 4.0497
12	* 1.8234	* 1.4753	* 1.8454	* 1.4856	* 1.0692	* 1.3888	* 0.9780	*
	* 2.2344	* 2.5680	* 2.2024	* 2.5058	* 2.7490	* 2.4896	* 3.2891	*
13	* 1.4237	* 1.5845	* 1.5142	* 1.6432	* 1.3884	* 0.8168	* 0.5677	*
	* 2.6149	* 2.3419	* 2.4438	* 2.4342	* 2.4900	* 3.5446	* 5.4229	*
14	* 1.8139	* 1.8199	* 1.7772	* 1.6483	* 0.9780	* 0.5548	*	*
	* 2.1999	* 2.1922	* 2.2427	* 2.4140	* 3.2856	* 5.4035	*	*
15	* 0.9701	* 1.0059	* 0.9274	* 0.8477	* F-SUB-Q			
	* 3.3864	* 3.3733	* 3.5493	* 4.0497	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 211 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 500 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9641 *	* 1.2843 *	* 1.8043 *	* 1.4580 *	* 1.8387 *	* 1.4341 *	* 1.8454 *	* 0.9668 *
	* 3.6839 *	* 3.3317 *	* 2.5354 *	* 2.8874 *	* 2.4590 *	* 2.8722 *	* 2.3910 *	* 3.7497 *
9	* 1.2843 *	* 1.7083 *	* 1.4066 *	* 1.8933 *	* 1.4643 *	* 1.5963 *	* 1.8470 *	* 1.0038 *
	* 3.3317 *	* 2.6913 *	* 3.0216 *	* 2.3953 *	* 2.8692 *	* 2.5720 *	* 2.3886 *	* 3.7328 *
10	* 1.8043 *	* 1.4048 *	* 1.4604 *	* 1.5629 *	* 1.8618 *	* 1.5130 *	* 1.7930 *	* 0.9123 *
	* 2.5354 *	* 3.0260 *	* 2.8816 *	* 2.6973 *	* 2.4248 *	* 2.7065 *	* 2.4609 *	* 3.9872 *
11	* 1.4580 *	* 1.8924 *	* 1.5608 *	* 1.7678 *	* 1.4728 *	* 1.6472 *	* 1.6564 *	* 0.8344 *
	* 2.8874 *	* 2.3964 *	* 2.7005 *	* 2.5624 *	* 2.7726 *	* 2.6909 *	* 2.6579 *	* 4.5479 *
12	* 1.8387 *	* 1.4641 *	* 1.8609 *	* 1.4725 *	* 1.0549 *	* 1.3922 *	* 0.9563 *	
	* 2.4590 *	* 2.8700 *	* 2.4259 *	* 2.7730 *	* 3.0291 *	* 2.7252 *	* 3.6814 *	
13	* 1.4341 *	* 1.5961 *	* 1.5130 *	* 1.6473 *	* 1.3918 *	* 0.8046 *	* 0.5548 *	
	* 2.8722 *	* 2.5721 *	* 2.7072 *	* 2.6907 *	* 2.7256 *	* 3.9553 *	* 6.0840 *	
14	* 1.8454 *	* 1.8471 *	* 1.7932 *	* 1.6564 *	* 0.9564 *	* 0.5418 *		
	* 2.3910 *	* 2.3884 *	* 2.4605 *	* 2.6578 *	* 3.6769 *	* 6.0667 *		
15	* 0.9668 *	* 1.0039 *	* 0.9123 *	* 0.8343 *	* F-SUB-Q			
	* 3.7497 *	* 3.7325 *	* 3.9867 *	* 4.5480 *	* M-SUB-Q			

AT 50% POWER, 500 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9659 *	* 1.2800 *	* 1.7965 *	* 1.4472 *	* 1.8274 *	* 1.4262 *	* 1.8393 *	* 0.9638 *
	* 3.7205 *	* 3.3609 *	* 2.7146 *	* 3.1032 *	* 2.6607 *	* 3.1596 *	* 2.6541 *	* 4.1590 *
9	* 1.2800 *	* 1.7034 *	* 1.3980 *	* 1.8832 *	* 1.4519 *	* 1.5868 *	* 1.8392 *	* 1.0006 *
	* 3.3609 *	* 2.7560 *	* 3.2293 *	* 2.5968 *	* 3.1174 *	* 2.8448 *	* 2.6538 *	* 4.1436 *
10	* 1.7965 *	* 1.3962 *	* 1.4503 *	* 1.5515 *	* 1.8498 *	* 1.4984 *	* 1.7806 *	* 0.9074 *
	* 2.7146 *	* 3.2339 *	* 3.0833 *	* 2.9122 *	* 2.6105 *	* 2.9782 *	* 2.7399 *	* 4.4306 *
11	* 1.4472 *	* 1.8823 *	* 1.5491 *	* 1.7569 *	* 1.4621 *	* 1.6325 *	* 1.6425 *	* 0.8272 *
	* 3.1032 *	* 2.5978 *	* 2.9157 *	* 2.6265 *	* 2.8468 *	* 2.7789 *	* 2.8548 *	* 5.0722 *
12	* 1.8274 *	* 1.4517 *	* 1.8490 *	* 1.4618 *	* 1.0504 *	* 1.3829 *	* 0.9484 *	
	* 2.6607 *	* 3.1182 *	* 2.6112 *	* 2.8472 *	* 3.1469 *	* 2.8400 *	* 3.8164 *	
13	* 1.4262 *	* 1.5866 *	* 1.4983 *	* 1.6327 *	* 1.3826 *	* 0.8023 *	* 0.5509 *	
	* 3.1596 *	* 2.8450 *	* 2.9782 *	* 2.7786 *	* 2.8403 *	* 4.1207 *	* 6.3216 *	
14	* 1.8394 *	* 1.8393 *	* 1.7809 *	* 1.6426 *	* 0.9485 *	* 0.5376 *		
	* 2.6540 *	* 2.6536 *	* 2.7395 *	* 2.8547 *	* 3.8116 *	* 6.3071 *		
15	* 0.9638 *	* 1.0007 *	* 0.9074 *	* 0.8271 *	* F-SUB-Q			
	* 4.1590 *	* 4.1432 *	* 4.4300 *	* 5.0722 *	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 212 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 500 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9745	* 1.2783	* 1.7654	* 1.4252	* 1.7924	* 1.4041	* 1.8055	* 0.9609
	* 3.7403	* 3.3947	* 2.6370	* 3.0085	* 2.5893	* 3.0620	* 2.5804	* 3.9842
9	* 1.2783	* 1.6759	* 1.3888	* 1.8467	* 1.4421	* 1.5603	* 1.8048	* 0.9970
	* 3.3947	* 2.7898	* 3.1063	* 2.5278	* 3.0100	* 2.7610	* 2.5870	* 3.9678
10	* 1.7654	* 1.3883	* 1.4272	* 1.5353	* 1.8143	* 1.4716	* 1.7450	* 0.9092
	* 2.6370	* 3.1080	* 3.0127	* 2.8384	* 2.5952	* 2.9239	* 2.6961	* 4.2482
11	* 1.4252	* 1.8458	* 1.5336	* 1.7237	* 1.4513	* 1.6009	* 1.6097	* 0.8233
	* 3.0085	* 2.5284	* 2.8413	* 2.6843	* 2.9025	* 2.8428	* 2.9198	* 4.9485
12	* 1.7924	* 1.4414	* 1.8135	* 1.4511	* 1.0544	* 1.3625	* 0.9497	*
	* 2.5893	* 3.0119	* 2.5963	* 2.9031	* 3.2149	* 2.9074	* 3.8292	*
13	* 1.4041	* 1.5601	* 1.4716	* 1.6011	* 1.3622	* 0.8065	* 0.5524	*
	* 3.0620	* 2.7612	* 2.9246	* 2.8424	* 2.9077	* 4.1623	* 6.3515	*
14	* 1.8055	* 1.8050	* 1.7453	* 1.6098	* 0.9498	* 0.5391	*	*
	* 2.5804	* 2.5867	* 2.6956	* 2.9196	* 3.8246	* 6.3367	*	*
15	* 0.9609	* 0.9971	* 0.9092	* 0.8232	* F-SUB-Q			
	* 3.9842	* 3.9675	* 4.2477	* 4.9485	* M-SUB-Q			

AT 50% POWER, 500 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9695	* 1.2596	* 1.7686	* 1.4146	* 1.7917	* 1.3942	* 1.8069	* 0.9414
	* 3.7236	* 3.3141	* 2.5322	* 2.9156	* 2.4919	* 2.9661	* 2.4801	* 3.9070
9	* 1.2596	* 1.6820	* 1.3699	* 1.8516	* 1.4181	* 1.5516	* 1.8058	* 0.9773
	* 3.3141	* 2.6744	* 3.0268	* 2.4260	* 2.9345	* 2.6707	* 2.4870	* 3.8943
10	* 1.7686	* 1.3682	* 1.4182	* 1.5187	* 1.8172	* 1.4610	* 1.7463	* 0.8849
	* 2.5322	* 3.0310	* 2.9172	* 2.7578	* 2.4933	* 2.8334	* 2.5918	* 4.2011
11	* 1.4146	* 1.8508	* 1.5164	* 1.7285	* 1.4321	* 1.6013	* 1.6136	* 0.8066
	* 2.9156	* 2.4270	* 2.7619	* 2.6363	* 2.8963	* 2.8251	* 2.8411	* 4.8638
12	* 1.7917	* 1.4175	* 1.8165	* 1.4319	* 1.0459	* 1.3705	* 0.9302	*
	* 2.4919	* 2.9350	* 2.4943	* 2.8964	* 3.2069	* 2.8808	* 3.8751	*
13	* 1.3942	* 1.5514	* 1.4609	* 1.6015	* 1.3702	* 0.8032	* 0.5431	*
	* 2.9661	* 2.6709	* 2.8339	* 2.8247	* 2.8810	* 4.1709	* 6.3256	*
14	* 1.8069	* 1.8060	* 1.7466	* 1.6138	* 0.9305	* 0.5294	*	*
	* 2.4801	* 2.4868	* 2.5914	* 2.8407	* 3.8700	* 6.3186	*	*
15	* 0.9414	* 0.9773	* 0.8849	* 0.8065	* F-SUB-Q			
	* 3.9070	* 3.8939	* 4.2004	* 4.8641	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 213 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 500 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9641 *	* 1.2490 *	* 1.7593 *	* 1.4014 *	* 1.7785 *	* 1.3798 *	* 1.7935 *	* 0.9291 *
	* 3.3595 *	* 3.0552 *	* 2.4221 *	* 2.7986 *	* 2.3912 *	* 2.8536 *	* 2.3841 *	* 3.7609 *
9	* 1.2490 *	* 1.6754 *	* 1.3586 *	* 1.8413 *	* 1.4027 *	* 1.5365 *	* 1.7924 *	* 0.9620 *
	* 3.0552 *	* 2.5003 *	* 2.8985 *	* 2.3252 *	* 2.8202 *	* 2.5701 *	* 2.3913 *	* 3.7586 *
10	* 1.7593 *	* 1.3569 *	* 1.4053 *	* 1.5063 *	* 1.8070 *	* 1.4464 *	* 1.7345 *	* 0.8726 *
	* 2.4221 *	* 2.9025 *	* 2.7956 *	* 2.6471 *	* 2.3910 *	* 2.7257 *	* 2.4897 *	* 4.0458 *
11	* 1.4014 *	* 1.8406 *	* 1.5040 *	* 1.7202 *	* 1.4194 *	* 1.5922 *	* 1.6062 *	* 0.7945 *
	* 2.7986 *	* 2.3260 *	* 2.6508 *	* 2.4203 *	* 2.6372 *	* 2.5678 *	* 2.6241 *	* 4.6840 *
12	* 1.7785 *	* 1.4027 *	* 1.8063 *	* 1.4193 *	* 1.0383 *	* 1.3686 *	* 0.9219 *	
	* 2.3912 *	* 2.8206 *	* 2.3918 *	* 2.6371 *	* 2.9034 *	* 2.6020 *	* 3.5089 *	
13	* 1.3798 *	* 1.5363 *	* 1.4463 *	* 1.5924 *	* 1.3683 *	* 0.8018 *	* 0.5400 *	
	* 2.8536 *	* 2.5704 *	* 2.7262 *	* 2.5673 *	* 2.6022 *	* 3.7598 *	* 5.7173 *	
14	* 1.7935 *	* 1.7926 *	* 1.7348 *	* 1.6064 *	* 0.9222 *	* 0.5259 *		
	* 2.3841 *	* 2.3910 *	* 2.4892 *	* 2.6237 *	* 3.5039 *	* 5.7158 *		
15	* 0.9291 *	* 0.9620 *	* 0.8727 *	* 0.7944 *	* F-SUB-Q			
	* 3.7609 *	* 3.7583 *	* 4.0451 *	* 4.6842 *	* M-SUB-Q			

AT 50% POWER, 500 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9652 *	* 1.2471 *	* 1.7486 *	* 1.3898 *	* 1.7637 *	* 1.3659 *	* 1.7765 *	* 0.9218 *
	* 3.0257 *	* 2.7436 *	* 2.1648 *	* 2.5081 *	* 2.1481 *	* 2.5674 *	* 2.1485 *	* 3.3657 *
9	* 1.2471 *	* 1.6679 *	* 1.3494 *	* 1.8280 *	* 1.3963 *	* 1.5216 *	* 1.7758 *	* 0.9586 *
	* 2.7436 *	* 2.2434 *	* 2.5875 *	* 2.0853 *	* 2.5261 *	* 2.3119 *	* 2.1532 *	* 3.3482 *
10	* 1.7486 *	* 1.3477 *	* 1.3952 *	* 1.4959 *	* 1.7953 *	* 1.4340 *	* 1.7201 *	* 0.8688 *
	* 2.1648 *	* 2.5908 *	* 2.4938 *	* 2.3666 *	* 2.1386 *	* 2.4394 *	* 2.2320 *	* 3.5964 *
11	* 1.3898 *	* 1.8274 *	* 1.4936 *	* 1.7111 *	* 1.4150 *	* 1.5831 *	* 1.5971 *	* 0.7936 *
	* 2.5081 *	* 2.0859 *	* 2.3698 *	* 2.1861 *	* 2.3862 *	* 2.3239 *	* 2.3721 *	* 4.1290 *
12	* 1.7637 *	* 1.3957 *	* 1.7947 *	* 1.4150 *	* 1.0386 *	* 1.3671 *	* 0.9236 *	
	* 2.1481 *	* 2.5264 *	* 2.1393 *	* 2.3861 *	* 2.6361 *	* 2.3610 *	* 3.1667 *	
13	* 1.3659 *	* 1.5214 *	* 1.4339 *	* 1.5834 *	* 1.3668 *	* 0.8064 *	* 0.5430 *	
	* 2.5674 *	* 2.3122 *	* 2.4395 *	* 2.3234 *	* 2.3611 *	* 3.4035 *	* 5.1776 *	
14	* 1.7765 *	* 1.7760 *	* 1.7205 *	* 1.5974 *	* 0.9238 *	* 0.5288 *		
	* 2.1485 *	* 2.1530 *	* 2.2315 *	* 2.3718 *	* 3.1623 *	* 5.1769 *		
15	* 0.9218 *	* 0.9587 *	* 0.8689 *	* 0.7936 *	* F-SUB-Q			
	* 3.3657 *	* 3.3479 *	* 3.5958 *	* 4.1290 *	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 214 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 500 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9779	* 1.2588	* 1.7361	* 1.3823	* 1.7459	* 1.3540	* 1.7546	* 0.9242 *
	* 2.9102	* 2.6518	* 2.0957	* 2.4257	* 2.0858	* 2.4919	* 2.0922	* 3.2366 *
9	* 1.2588	* 1.6590	* 1.3556	* 1.8103	* 1.4026	* 1.5078	* 1.7547	* 0.9605 *
	* 2.6518	* 2.1851	* 2.4820	* 2.0239	* 2.4208	* 2.2442	* 2.0957	* 3.2186 *
10	* 1.7361	* 1.3552	* 1.3901	* 1.4985	* 1.7819	* 1.4255	* 1.7029	* 0.8775 *
	* 2.0957	* 2.4831	* 2.4084	* 2.2761	* 2.0718	* 2.3581	* 2.1681	* 3.4288 *
11	* 1.3823	* 1.8097	* 1.4970	* 1.7016	* 1.4244	* 1.5761	* 1.5877	* 0.7993 *
	* 2.4257	* 2.0244	* 2.2781	* 2.1367	* 2.3211	* 2.2721	* 2.3138	* 3.9476 *
12	* 1.7459	* 1.4021	* 1.7813	* 1.4244	* 1.0531	* 1.3706	* 0.9409 *	
	* 2.0858	* 2.4220	* 2.0724	* 2.3212	* 2.5739	* 2.3095	* 3.0402 *	
13	* 1.3540	* 1.5076	* 1.4254	* 1.5764	* 1.3704	* 0.8240	* 0.5558 *	
	* 2.4919	* 2.2444	* 2.3596	* 2.2716	* 2.3096	* 3.2918	* 4.9847 *	
14	* 1.7546	* 1.7549	* 1.7033	* 1.5880	* 0.9411	* 0.5415 *		
	* 2.0922	* 2.0955	* 2.1676	* 2.3134	* 3.0361	* 4.9812 *		
15	* 0.9242	* 0.9605	* 0.8776	* 0.7993	* F-SUB-Q			
	* 3.2366	* 3.2183	* 3.4282	* 3.9475	* M-SUB-Q			

AT 50% POWER, 500 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9937	* 1.2619	* 1.7676	* 1.3903	* 1.7699	* 1.3598	* 1.7769	* 0.9131 *
	* 2.6174	* 2.3665	* 1.8591	* 2.1780	* 1.8577	* 2.2418	* 1.8658	* 2.9593 *
9	* 1.2619	* 1.6970	* 1.3561	* 1.8430	* 1.3992	* 1.5187	* 1.7779	* 0.9474 *
	* 2.3665	* 1.9242	* 2.2373	* 1.7953	* 2.1922	* 2.0128	* 1.8679	* 2.9507 *
10	* 1.7676	* 1.3545	* 1.4028	* 1.5064	* 1.8175	* 1.4404	* 1.7318	* 0.8629 *
	* 1.8591	* 2.2402	* 2.1565	* 2.0429	* 1.8356	* 2.1115	* 1.9252	* 3.1534 *
11	* 1.3903	* 1.8424	* 1.5047	* 1.7442	* 1.4354	* 1.6140	* 1.6270	* 0.7930 *
	* 2.1780	* 1.7957	* 2.0456	* 1.8851	* 2.0738	* 2.0108	* 2.0433	* 3.5993 *
12	* 1.7699	* 1.3988	* 1.8169	* 1.4355	* 1.0725	* 1.4245	* 0.9453 *	
	* 1.8577	* 2.1923	* 1.8361	* 2.0736	* 2.3101	* 2.0613	* 2.7722 *	
13	* 1.3598	* 1.5185	* 1.4403	* 1.6144	* 1.4243	* 0.8514	* 0.5651 *	
	* 2.2418	* 2.0130	* 2.1116	* 2.0103	* 2.0614	* 2.9929	* 4.5702 *	
14	* 1.7769	* 1.7322	* 1.6273	* 0.9456 *				
	* 1.8658	* 1.8676	* 1.9247	* 2.0429	* 2.7680	* 4.5756 *		
15	* 0.9131	* 0.9475	* 0.8629	* 0.7929	* F-SUB-Q			
	* 2.9593	* 2.9504	* 3.1528	* 3.5995	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 215 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 500 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0634 *	* 1.2862 *	* 1.7875 *	* 1.3979 *	* 1.7804 *	* 1.3634 *	* 1.7840 *	* 0.9141 *
	* 2.3573 *	* 2.1568 *	* 1.6871 *	* 1.9881 *	* 1.6938 *	* 2.0518 *	* 1.7045 *	* 2.7153 *
9	* 1.2862 *	* 1.7271 *	* 1.3684 *	* 1.8588 *	* 1.4120 *	* 1.5253 *	* 1.7865 *	* 0.9492 *
	* 2.1568 *	* 1.7440 *	* 2.0358 *	* 1.6331 *	* 1.9948 *	* 1.8387 *	* 1.7050 *	* 2.7054 *
10	* 1.7875 *	* 1.3667 *	* 1.4175 *	* 1.5238 *	* 1.8411 *	* 1.4557 *	* 1.7476 *	* 0.8669 *
	* 1.6871 *	* 2.0384 *	* 1.9607 *	* 1.8559 *	* 1.6638 *	* 1.9188 *	* 1.7503 *	* 2.8838 *
11	* 1.3979 *	* 1.8579 *	* 1.5220 *	* 1.7808 *	* 1.4672 *	* 1.6546 *	* 1.6576 *	* 0.8011 *
	* 1.9881 *	* 1.6334 *	* 1.8584 *	* 1.7127 *	* 1.8837 *	* 1.8256 *	* 1.8493 *	* 3.2754 *
12	* 1.7804 *	* 1.4116 *	* 1.8405 *	* 1.4673 *	* 1.1505 *	* 1.4936 *	* 0.9755 *	
	* 1.6938 *	* 1.9957 *	* 1.6642 *	* 1.8835 *	* 2.0721 *	* 1.8481 *	* 2.5109 *	
13	* 1.3634 *	* 1.5251 *	* 1.4557 *	* 1.6551 *	* 1.4934 *	* 0.9244 *	* 0.5914 *	
	* 2.0518 *	* 1.8389 *	* 1.9189 *	* 1.8252 *	* 1.8482 *	* 2.6873 *	* 4.1194 *	
14	* 1.7840 *	* 1.7868 *	* 1.7480 *	* 1.6579 *	* 0.9759 *	* 0.5749 *		
	* 1.7045 *	* 1.7048 *	* 1.7499 *	* 1.8489 *	* 2.5071 *	* 4.1258 *		
15	* 0.9141 *	* 0.9493 *	* 0.8669 *	* 0.8010 *	* F-SUB-Q			
	* 2.7153 *	* 2.7051 *	* 2.8833 *	* 3.2756 *	* M-SUB-Q			

AT 50% POWER, 500 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1805 *	* 1.3248 *	* 1.7823 *	* 1.4004 *	* 1.7663 *	* 1.3595 *	* 1.7656 *	* 0.9263 *
	* 2.1812 *	* 1.9633 *	* 1.5760 *	* 1.8533 *	* 1.5904 *	* 1.9186 *	* 1.6041 *	* 2.5038 *
9	* 1.3248 *	* 1.7412 *	* 1.3855 *	* 1.8464 *	* 1.4357 *	* 1.5213 *	* 1.7701 *	* 0.9633 *
	* 1.9633 *	* 1.6122 *	* 1.8778 *	* 1.5334 *	* 1.8290 *	* 1.7184 *	* 1.6028 *	* 2.4880 *
10	* 1.7823 *	* 1.3851 *	* 1.4297 *	* 1.5372 *	* 1.8382 *	* 1.4642 *	* 1.7387 *	* 0.8874 *
	* 1.5760 *	* 1.8786 *	* 1.8178 *	* 1.7161 *	* 1.5528 *	* 1.7794 *	* 1.6391 *	* 2.6298 *
11	* 1.4004 *	* 1.8447 *	* 1.5357 *	* 1.8001 *	* 1.5109 *	* 1.6816 *	* 1.6671 *	* 0.8205 *
	* 1.8533 *	* 1.5338 *	* 1.7176 *	* 1.5851 *	* 1.7217 *	* 1.6908 *	* 1.7136 *	* 2.9861 *
12	* 1.7663 *	* 1.4352 *	* 1.8377 *	* 1.5110 *	* 1.2749 *	* 1.5857 *	* 1.0263 *	
	* 1.5904 *	* 1.8298 *	* 1.5532 *	* 1.7218 *	* 1.9322 *	* 1.7315 *	* 2.2806 *	
13	* 1.3595 *	* 1.5210 *	* 1.4640 *	* 1.6820 *	* 1.5856 *	* 1.0310 *	* 0.6308 *	
	* 1.9186 *	* 1.7186 *	* 1.7795 *	* 1.6904 *	* 1.7316 *	* 2.4684 *	* 3.7628 *	
14	* 1.7656 *	* 1.7703 *	* 1.7391 *	* 1.6674 *	* 1.0265 *	* 0.6132 *		
	* 1.6041 *	* 1.6026 *	* 1.6387 *	* 1.7133 *	* 2.2777 *	* 3.7690 *		
15	* 0.9263 *	* 0.9634 *	* 0.8874 *	* 0.8204 *	* F-SUB-Q			
	* 2.5038 *	* 2.4878 *	* 2.6293 *	* 2.9861 *	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 216 of 312

TABLE A-1 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - NORMAL OPERATION

AT 50% POWER, 500 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2250	* 1.3285	* 1.7911	* 1.3932	* 1.7689	* 1.3565	* 1.7673	* 0.9073
	* 2.0258	* 1.8513	* 1.4794	* 1.7565	* 1.4992	* 1.8173	* 1.5133	* 2.4160
9	* 1.3285	* 1.7679	* 1.3742	* 1.8548	* 1.4206	* 1.5226	* 1.7736	* 0.9453
	* 1.8513	* 1.5063	* 1.7848	* 1.4415	* 1.7453	* 1.6221	* 1.5105	* 2.3990
10	* 1.7911	* 1.3726	* 1.4378	* 1.5406	* 1.8524	* 1.4741	* 1.7494	* 0.8677
	* 1.4794	* 1.7872	* 1.7093	* 1.6164	* 1.4541	* 1.6693	* 1.5383	* 2.5449
11	* 1.3932	* 1.8530	* 1.5388	* 1.8332	* 1.5214	* 1.7175	* 1.6905	* 0.8105
	* 1.7565	* 1.4428	* 1.6182	* 1.4773	* 1.6185	* 1.5720	* 1.6017	* 2.8606
12	* 1.7689	* 1.4202	* 1.8518	* 1.5217	* 1.3717	* 1.6678	* 1.0305	
	* 1.4992	* 1.7461	* 1.4545	* 1.6183	* 1.7915	* 1.6045	* 2.1617	
13	* 1.3565	* 1.5223	* 1.4739	* 1.7179	* 1.6677	* 1.0831	* 0.6410	
	* 1.8173	* 1.6223	* 1.6694	* 1.5717	* 1.6046	* 2.3384	* 3.5791	
14	* 1.7673	* 1.7738	* 1.7497	* 1.6908	* 1.0307	* 0.6230		
	* 1.5133	* 1.5103	* 1.5379	* 1.6015	* 2.1590	* 3.5860		
15	* 0.9073	* 0.9454	* 0.8678	* 0.8104	* F-SUB-Q			
	* 2.4160	* 2.3988	* 2.5445	* 2.8608	* M-SUB-Q			

AT 50% POWER, 500 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1984	* 1.2811	* 1.6972	* 1.3300	* 1.6769	* 1.3001	* 1.6711	* 0.8628
	* 2.0007	* 1.8316	* 1.4906	* 1.7585	* 1.5121	* 1.8156	* 1.5311	* 2.4373
9	* 1.2811	* 1.6854	* 1.3156	* 1.7566	* 1.3526	* 1.4581	* 1.6790	* 0.8970
	* 1.8316	* 1.5047	* 1.7825	* 1.4539	* 1.7489	* 1.6214	* 1.5263	* 2.4256
10	* 1.6972	* 1.3141	* 1.3868	* 1.4796	* 1.7639	* 1.4199	* 1.6615	* 0.8267
	* 1.4906	* 1.7848	* 1.6947	* 1.6083	* 1.4615	* 1.6568	* 1.5494	* 2.5627
11	* 1.3300	* 1.7548	* 1.4777	* 1.7517	* 1.4739	* 1.6497	* 1.6116	* 0.7728
	* 1.7585	* 1.4554	* 1.6101	* 1.4790	* 1.6052	* 1.5710	* 1.6059	* 2.8779
12	* 1.6769	* 1.3521	* 1.7636	* 1.4742	* 1.3477	* 1.6134	* 0.9976	
	* 1.5121	* 1.7489	* 1.4619	* 1.6050	* 1.7639	* 1.6024	* 2.1532	
13	* 1.3001	* 1.4578	* 1.4197	* 1.6501	* 1.6132	* 1.0558	* 0.6253	
	* 1.8156	* 1.6216	* 1.6571	* 1.5707	* 1.6025	* 2.3257	* 3.5530	
14	* 1.6711	* 1.6792	* 1.6618	* 1.6118	* 0.9975	* 0.6072		
	* 1.5311	* 1.5262	* 1.5491	* 1.6057	* 2.1511	* 3.5634		
15	* 0.8628	* 0.8970	* 0.8267	* 0.7727	* F-SUB-Q			
	* 2.4373	* 2.4253	* 2.5623	* 2.8782	* M-SUB-Q			

CNEI-0400-355
Appendix A, Rev. 0
Page 217 of 312

F-SUB-O & M-SUB-O VALUES (F-SUB-O OP MARGIN) - NORMAL OPERATION

	H	G	F	E	D	C	B	A
8	* 1.0385	* 1.1009	* 1.4150	* 1.1363	* 1.4026	* 1.1154	* 1.3938	* 0.7314
	* 2.2218	* 2.0527	* 1.7224	* 1.9856	* 1.7434	* 2.0443	* 1.7729	* 2.7859
9	* 1.1009	* 1.4247	* 1.1275	* 1.4840	* 1.1609	* 1.2433	* 1.4014	* 0.7537
	* 2.0527	* 1.7126	* 2.0055	* 1.6586	* 1.9629	* 1.8365	* 1.7659	* 2.7960
10	* 1.4150	* 1.1263	* 1.1979	* 1.2735	* 1.4944	* 1.2259	* 1.3894	* 0.6986
	* 1.7224	* 2.0079	* 1.8925	* 1.8004	* 1.6625	* 1.8519	* 1.7891	* 2.9393
11	* 1.1363	* 1.4825	* 1.2718	* 1.4870	* 1.2696	* 1.3897	* 1.3472	* 0.6522
	* 1.9856	* 1.6602	* 1.8026	* 1.6743	* 1.7920	* 1.7947	* 1.8542	* 3.3036
12	* 1.4026	* 1.1609	* 1.4940	* 1.2698	* 1.1521	* 1.3592	* 0.8493	*
	* 1.7434	* 1.9632	* 1.6629	* 1.7920	* 2.0046	* 1.8477	* 2.4539	*
13	* 1.1154	* 1.2431	* 1.2257	* 1.3899	* 1.3591	* 0.8870	* 0.5390	*
	* 2.0443	* 1.8368	* 1.8523	* 1.7944	* 1.8479	* 2.6967	* 4.0216	*
14	* 1.3938	* 1.4015	* 1.3896	* 1.3473	* 0.8485	* 0.5237	*	*
	* 1.7729	* 1.7657	* 1.7888	* 1.8541	* 2.4535	* 4.0301	*	*
15	* 0.7314	* 0.7537	* 0.6986	* 0.6521	* F-SUB-Q			
	* 2.7859	* 2.7957	* 2.9391	* 3.3040	* M-SUB-Q			

	H	G	F	E	D	C	B	A
8	* 0.5177	* 0.5457	* 0.6504	* 0.5628	* 0.6465	* 0.5369	* 0.6037	* 0.3453
	* 4.3104	* 4.0060	* 3.6233	* 3.8817	* 3.6599	* 4.0992	* 3.9575	* 5.7253
9	* 0.5457	* 0.6339	* 0.5579	* 0.6636	* 0.5756	* 0.5671	* 0.6068	* 0.3531
	* 4.0060	* 3.7148	* 3.9229	* 3.5788	* 3.8288	* 3.8937	* 3.9420	* 5.7898
10	* 0.6504	* 0.5573	* 0.5602	* 0.6083	* 0.6688	* 0.5696	* 0.6009	* 0.3324
	* 3.6233	* 3.9271	* 3.9120	* 3.6416	* 3.5821	* 3.8514	* 3.9981	* 5.9905
11	* 0.5628	* 0.6630	* 0.6075	* 0.6662	* 0.5890	* 0.6383	* 0.5782	* 0.3054
	* 3.8817	* 3.5822	* 3.6463	* 3.6008	* 3.7267	* 3.7773	* 4.1795	* 6.8487
12	* 0.6465	* 0.5756	* 0.6686	* 0.5890	* 0.5297	* 0.5895	* 0.4038	
	* 3.6599	* 3.8297	* 3.5836	* 3.7269	* 4.2065	* 4.1167	* 4.9953	
13	* 0.5369	* 0.5670	* 0.5695	* 0.6383	* 0.5894	* 0.4313	* 0.2564	
	* 4.0992	* 3.8940	* 3.8522	* 3.7770	* 4.1172	* 5.3939	* 8.2412	
14	* 0.6037	* 0.6068	* 0.6010	* 0.5782	* 0.4034	* 0.2525		
	* 3.9575	* 3.9418	* 3.9978	* 4.1796	* 4.9948	* 8.1531		
15	* 0.3453	* 0.3531	* 0.3324	* 0.3053	* F-SUB-Q			
	* 5.7253	* 5.7893	* 5.9896	* 6.8496	* M-SUB-Q			

CNEI-0400-355
Appendix A, Rev. 0
Page 218 of 312

	H	G	F	E	D	C	B	A
8	* 3.9205	* 3.8642	* 3.0478	* 3.7759	* 3.0551	* 3.8878	* 3.4061	* 5.9901
	* 4.9414	* 4.8856	* 4.0553	* 4.7349	* 4.0190	* 4.8720	* 4.4719	* 7.4383
	* 5.1983	* 5.1475	* 4.3770	* 4.9852	* 4.3489	* 5.1405	* 4.7964	* 7.8433
	* 4.7358	* 4.7596	* 4.3075	* 4.6381	* 4.2995	* 4.8276	* 4.7365	* 7.3368
	* 4.0311	* 4.1299	* 3.8645	* 4.0582	* 3.8766	* 4.2429	* 4.2757	* 6.3619
	* 3.0893	* 3.2876	* 3.2081	* 3.2863	* 3.2388	* 3.4510	* 3.5889	* 4.9868
9	* 3.8642	* 3.1658	* 3.8387	* 3.0238	* 3.6435	* 3.8214	* 3.3798	* 5.8634
	* 4.8856	* 4.1792	* 4.8287	* 3.9781	* 4.5565	* 4.7484	* 4.4343	* 7.2685
	* 5.1475	* 4.5031	* 5.0790	* 4.2770	* 4.7987	* 4.9926	* 4.7529	* 7.6623
	* 4.7596	* 4.4033	* 4.7046	* 4.2285	* 4.4850	* 4.6697	* 4.6810	* 7.1776
	* 4.1299	* 3.9302	* 4.1013	* 3.8136	* 3.9359	* 4.0945	* 4.2261	* 6.2542
	* 3.2876	* 3.2239	* 3.3020	* 3.1938	* 3.2266	* 3.3453	* 3.5534	* 4.9382
10	* 3.0478	* 3.8432	* 3.8010	* 3.5300	* 2.9799	* 3.6813	* 3.4207	* 6.1939
	* 4.0553	* 4.8357	* 4.7443	* 4.4134	* 3.8886	* 4.5665	* 4.4650	* 7.6627
	* 4.3770	* 5.0869	* 4.9792	* 4.6417	* 4.1857	* 4.8017	* 4.7730	* 8.0698
	* 4.3075	* 4.7115	* 4.6068	* 4.3288	* 4.1464	* 4.4927	* 4.6755	* 7.5406
	* 3.8645	* 4.1065	* 4.0064	* 3.7957	* 3.7467	* 3.9447	* 4.2223	* 6.5511
	* 3.2081	* 3.3042	* 3.2338	* 3.1118	* 3.1489	* 3.2305	* 3.5511	* 5.1461
11	* 3.7759	* 3.0287	* 3.5345	* 2.9789	* 3.5742	* 3.0902	* 3.5633	* 6.7783
	* 4.7349	* 3.9847	* 4.4187	* 3.8876	* 4.4282	* 4.0300	* 4.6060	* 8.3457
	* 4.9852	* 4.2836	* 4.6469	* 4.1817	* 4.6492	* 4.3245	* 4.8927	* 8.7716
	* 4.6381	* 4.2340	* 4.3360	* 4.1359	* 4.3273	* 4.2699	* 4.7197	* 8.1545
	* 4.0582	* 3.8177	* 3.8000	* 3.7320	* 3.7831	* 3.8367	* 4.2464	* 7.0512
	* 3.2863	* 3.1968	* 3.1149	* 3.1307	* 3.0838	* 3.2218	* 3.6199	* 5.5044
12	* 3.0551	* 3.6488	* 2.9822	* 3.5761	* 3.9411	* 3.3659	* 4.6968	
	* 4.0190	* 4.5614	* 3.8917	* 4.4307	* 4.8424	* 4.3720	* 5.8523	
	* 4.3489	* 4.8037	* 4.1887	* 4.6516	* 5.0610	* 4.6559	* 6.1957	
	* 4.2995	* 4.4887	* 4.1492	* 4.3293	* 4.6529	* 4.5051	* 5.8600	
	* 3.8766	* 3.9385	* 3.7488	* 3.7845	* 4.0175	* 4.0552	* 5.1465	
	* 3.2388	* 3.2281	* 3.1503	* 3.0848	* 3.2031	* 3.3772	* 4.1379	
13	* 3.8878	* 3.8236	* 3.6838	* 3.0916	* 3.3680	* 4.8831	* 8.3537	
	* 4.8720	* 4.7510	* 4.5695	* 4.0321	* 4.3743	* 6.0532	*10.2154	
	* 5.1405	* 4.9953	* 4.8047	* 4.3266	* 4.6581	* 6.3633	*10.6182	
	* 4.8276	* 4.6717	* 4.4949	* 4.2716	* 4.5066	* 5.9088	* 9.5407	
	* 4.2429	* 4.0959	* 3.9462	* 3.8378	* 4.0560	* 5.1112	* 7.9927	
	* 3.4510	* 3.3460	* 3.2313	* 3.2225	* 3.3781	* 4.0621	* 5.9450	
14	* 3.4061	* 3.3806	* 3.4224	* 3.5659	* 4.7022	* 8.5073		
	* 4.4719	* 4.4358	* 4.4670	* 4.6091	* 5.8589	*10.3865		
	* 4.7964	* 4.7544	* 4.7749	* 4.8958	* 6.2026	*10.7963		
	* 4.7365	* 4.6820	* 4.6769	* 4.7219	* 5.8659	* 9.6945		
	* 4.2757	* 4.2269	* 4.2233	* 4.2478	* 5.1506	* 8.1149		
	* 3.5889	* 3.5539	* 3.5516	* 3.6209	* 4.1394	* 6.0333		
15	* 5.9901	* 5.8643	* 6.1971	* 6.7837	* 4 EFPD	118 %	POWER	
	* 7.4383	* 7.2696	* 7.6665	* 8.3521	* 75 EFPD	118 %	POWER	
	* 7.8433	* 7.6633	* 8.0735	* 8.7778	* 125 EFPD	118 %	POWER	
	* 7.3368	* 7.1783	* 7.5432	* 8.1593	* 250 EFPD	118 %	POWER	
	* 6.3619	* 6.2545	* 6.5525	* 7.0545	* 350 EFPD	118 %	POWER	
	* 4.9868	* 4.9383	* 5.1466	* 5.5062	* 500 EFPD	118 %	POWER	

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355

Appendix A, Rev. 0

Page 219 of 312

TABLE A-2 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 23 OF 24
 (LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.9651	* 1.9158	* 1.4275	* 1.8906	* 1.4176	* 1.8596	* 1.4475	* 2.7793
	* 2.4276	* 2.3427	* 1.8419	* 2.2885	* 1.8133	* 2.2569	* 1.8620	* 3.3315
	* 2.5627	* 2.4614	* 1.9820	* 2.3991	* 1.9606	* 2.3762	* 2.0038	* 3.4960
	* 2.4477	* 2.3515	* 2.0226	* 2.2998	* 2.0155	* 2.3178	* 2.0645	* 3.3711
	* 2.2287	* 2.1564	* 1.9235	* 2.1217	* 1.9293	* 2.1576	* 1.9835	* 3.0841
	* 2.0012	* 1.9658	* 1.8156	* 1.9535	* 1.8284	* 1.9955	* 1.8882	* 2.7352
9	* 1.9158	* 1.4374	* 1.9121	* 1.4279	* 1.8275	* 1.7226	* 1.4292	* 2.7098
	* 2.3427	* 1.8455	* 2.3295	* 1.8246	* 2.2100	* 2.0867	* 1.8380	* 3.2512
	* 2.4614	* 1.9870	* 2.4392	* 1.9565	* 2.3180	* 2.1958	* 1.9776	* 3.4140
	* 2.3515	* 2.0191	* 2.3292	* 1.9878	* 2.2327	* 2.1402	* 2.0380	* 3.2957
	* 2.1564	* 1.9123	* 2.1412	* 1.8836	* 2.0637	* 1.9952	* 1.9593	* 3.0268
	* 1.9658	* 1.7835	* 1.9631	* 1.7670	* 1.9082	* 1.8501	* 1.8663	* 2.7004
10	* 1.4275	* 1.9137	* 1.7525	* 1.7127	* 1.4130	* 1.7031	* 1.4411	* 2.8803
	* 1.8419	* 2.3328	* 2.1331	* 2.0779	* 1.7831	* 2.0449	* 1.8461	* 3.4470
	* 1.9820	* 2.4427	* 2.2398	* 2.1801	* 1.9156	* 2.1446	* 1.9819	* 3.6142
	* 2.0226	* 2.3323	* 2.1570	* 2.1007	* 1.9502	* 2.0784	* 2.0332	* 3.4778
	* 1.9235	* 2.1438	* 1.9890	* 1.9403	* 1.8531	* 1.9304	* 1.9556	* 3.1827
	* 1.8156	* 1.9648	* 1.8228	* 1.7927	* 1.7363	* 1.7794	* 1.8623	* 2.8244
11	* 1.8906	* 1.4312	* 1.7158	* 1.4064	* 1.6708	* 1.3833	* 1.4898	* 3.0772
	* 2.2885	* 1.8277	* 2.0816	* 1.7789	* 2.0075	* 1.7709	* 1.8856	* 3.6724
	* 2.3991	* 1.9597	* 2.1836	* 1.9109	* 2.1013	* 1.9087	* 2.0097	* 3.8482
	* 2.2998	* 1.9905	* 2.1037	* 1.9425	* 2.0230	* 1.9676	* 2.0307	* 3.6992
	* 2.1217	* 1.8858	* 1.9427	* 1.8444	* 1.8693	* 1.8827	* 1.9436	* 3.3792
	* 1.9535	* 1.7688	* 1.7945	* 1.7263	* 1.7138	* 1.7843	* 1.8745	* 2.9929
12	* 1.4176	* 1.8292	* 1.4139	* 1.6717	* 1.7648	* 1.4256	* 2.2032	*
	* 1.8133	* 2.2121	* 1.7844	* 2.0085	* 2.1161	* 1.8146	* 2.6578	*
	* 1.9606	* 2.3202	* 1.9168	* 2.1024	* 2.2160	* 1.9401	* 2.8034	*
	* 2.0155	* 2.2344	* 1.9513	* 2.0239	* 2.1338	* 1.9690	* 2.7370	*
	* 1.9293	* 2.0649	* 1.8539	* 1.8700	* 1.9657	* 1.8876	* 2.5367	*
	* 1.8284	* 1.9089	* 1.7370	* 1.7144	* 1.7908	* 1.7857	* 2.2980	*
13	* 1.8596	* 1.7230	* 1.7041	* 1.3838	* 1.4264	* 2.3622	* 3.8658	*
	* 2.2569	* 2.0871	* 2.0460	* 1.7717	* 1.8155	* 2.8451	* 4.5804	*
	* 2.3762	* 2.1964	* 2.1458	* 1.9094	* 1.9409	* 2.9851	* 4.7454	*
	* 2.3178	* 2.1407	* 2.0793	* 1.9683	* 1.9696	* 2.8702	* 4.4042	*
	* 2.1576	* 1.9956	* 1.9310	* 1.8832	* 1.8879	* 2.6253	* 3.8961	*
	* 1.9955	* 1.8502	* 1.7798	* 1.7847	* 1.7862	* 2.3555	* 3.3065	*
14	* 1.4475	* 1.4296	* 1.4416	* 1.4908	* 2.2058	* 3.9429	*	*
	* 1.8620	* 1.8385	* 1.8468	* 1.8867	* 2.6609	* 4.6626	*	*
	* 2.0038	* 1.9781	* 1.9826	* 2.0108	* 2.8066	* 4.8299	*	*
	* 2.0645	* 2.0384	* 2.0336	* 2.0315	* 2.7400	* 4.4797	*	*
	* 1.9835	* 1.9596	* 1.9560	* 1.9442	* 2.5388	* 3.9588	*	*
	* 1.8882	* 1.8664	* 1.8625	* 1.8749	* 2.2990	* 3.3543	*	*
15	* 2.7793	* 2.7104	* 2.8822	* 3.0794	* 4 EFPD	118 % POWER		
	* 3.3315	* 3.2519	* 3.4491	* 3.6749	* 75 EFPD	118 % POWER		
	* 3.4960	* 3.4146	* 3.6162	* 3.8506	* 125 EFPD	118 % POWER		
	* 3.3711	* 3.2961	* 3.4793	* 3.7011	* 250 EFPD	118 % POWER		
	* 3.0841	* 3.0271	* 3.1837	* 3.3805	* 350 EFPD	118 % POWER		
	* 2.7352	* 2.7005	* 2.8249	* 2.9936	* 500 EFPD	118 % POWER		

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 220 of 312

TABLE A-2 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.7386	* 1.7448	* 1.5934	* 1.7631	* 1.5055	* 1.6490	* 1.4438	* 2.5823
	* 2.0767	* 2.0446	* 1.8369	* 2.0014	* 1.7442	* 1.9158	* 1.7207	* 2.8980
	* 2.1720	* 2.1054	* 1.8600	* 2.0492	* 1.8012	* 1.9899	* 1.7975	* 2.9696
	* 2.0934	* 1.9943	* 1.7490	* 1.9419	* 1.7329	* 1.9443	* 1.7605	* 2.8197
	* 1.9572	* 1.8600	* 1.6454	* 1.8191	* 1.6451	* 1.8496	* 1.6871	* 2.6089
	* 1.8506	* 1.7717	* 1.5922	* 1.7447	* 1.6085	* 1.7930	* 1.6511	* 2.3944
9	* 1.7448	* 1.4182	* 1.7258	* 1.4147	* 1.6669	* 1.5222	* 1.4133	* 2.5172
	* 2.0446	* 1.7037	* 2.0239	* 1.6830	* 1.9262	* 1.7596	* 1.6840	* 2.8230
	* 2.1054	* 1.7880	* 2.0860	* 1.7609	* 1.9837	* 1.8240	* 1.7599	* 2.8924
	* 1.9943	* 1.7622	* 1.9752	* 1.7356	* 1.8962	* 1.7807	* 1.7319	* 2.7447
	* 1.8600	* 1.6622	* 1.8411	* 1.6447	* 1.7786	* 1.6931	* 1.6632	* 2.5482
	* 1.7717	* 1.5952	* 1.7592	* 1.5763	* 1.7126	* 1.6441	* 1.6326	* 2.3478
10	* 1.5934	* 1.7281	* 1.5463	* 1.5810	* 1.3927	* 1.5203	* 1.3934	* 2.6019
	* 1.8369	* 2.0267	* 1.8145	* 1.8167	* 1.6436	* 1.7461	* 1.6658	* 2.9425
	* 1.8600	* 2.0882	* 1.8840	* 1.8707	* 1.7265	* 1.8045	* 1.7461	* 3.0275
	* 1.7490	* 1.9781	* 1.8185	* 1.7823	* 1.7184	* 1.7454	* 1.7221	* 2.8819
	* 1.6454	* 1.8436	* 1.7111	* 1.6713	* 1.6165	* 1.6518	* 1.6574	* 2.6746
	* 1.5922	* 1.7609	* 1.6419	* 1.6109	* 1.5488	* 1.5954	* 1.6302	* 2.4637
11	* 1.7631	* 1.4168	* 1.5833	* 1.3961	* 1.5143	* 1.4051	* 1.3827	* 2.7513
	* 2.0014	* 1.6857	* 1.8202	* 1.6559	* 1.7378	* 1.6279	* 1.6392	* 3.1090
	* 2.0492	* 1.7635	* 1.8740	* 1.7341	* 1.7883	* 1.6882	* 1.7122	* 3.1995
	* 1.9419	* 1.7376	* 1.7851	* 1.7088	* 1.7094	* 1.6629	* 1.7058	* 3.0525
	* 1.8191	* 1.6470	* 1.6736	* 1.6089	* 1.6032	* 1.5949	* 1.6381	* 2.8295
	* 1.7447	* 1.5781	* 1.6126	* 1.5428	* 1.5371	* 1.5665	* 1.6354	* 2.5979
12	* 1.5055	* 1.6679	* 1.3933	* 1.5147	* 1.5152	* 1.3796	* 2.0484	*
	* 1.7442	* 1.9282	* 1.6444	* 1.7390	* 1.7529	* 1.6383	* 2.3088	*
	* 1.8012	* 1.9857	* 1.7273	* 1.7893	* 1.8187	* 1.7133	* 2.3784	*
	* 1.7329	* 1.8978	* 1.7196	* 1.7103	* 1.7646	* 1.6775	* 2.2843	*
	* 1.6451	* 1.7797	* 1.6173	* 1.6038	* 1.6669	* 1.6101	* 2.1407	*
	* 1.6085	* 1.7132	* 1.5494	* 1.5376	* 1.6026	* 1.5731	* 2.0056	*
13	* 1.6490	* 1.5227	* 1.5208	* 1.4056	* 1.3803	* 2.1294	* 3.4845	*
	* 1.9158	* 1.7601	* 1.7470	* 1.6287	* 1.6391	* 2.4179	* 3.9286	*
	* 1.9899	* 1.8245	* 1.8054	* 1.6890	* 1.7141	* 2.4851	* 4.0028	*
	* 1.9443	* 1.7811	* 1.7462	* 1.6636	* 1.6780	* 2.3604	* 3.6940	*
	* 1.8496	* 1.6933	* 1.6523	* 1.5953	* 1.6104	* 2.1892	* 3.3205	*
	* 1.7930	* 1.6442	* 1.5957	* 1.5668	* 1.5736	* 2.0386	* 2.9306	*
14	* 1.4438	* 1.4139	* 1.3940	* 1.3837	* 2.0502	* 3.5272	*	*
	* 1.7207	* 1.6845	* 1.6664	* 1.6402	* 2.3117	* 3.9699	*	*
	* 1.7975	* 1.7604	* 1.7469	* 1.7132	* 2.3813	* 4.0456	*	*
	* 1.7605	* 1.7322	* 1.7226	* 1.7066	* 2.2858	* 3.7327	*	*
	* 1.6871	* 1.6634	* 1.6577	* 1.6386	* 2.1418	* 3.3527	*	*
	* 1.6511	* 1.6327	* 1.6304	* 1.6357	* 2.0059	* 2.9571	*	*
15	* 2.5823	* 2.5175	* 2.6036	* 2.7533	* 4 EFPD	118 % POWER		
	* 2.8980	* 2.8233	* 2.9444	* 3.1111	* 75 EFPD	118 % POWER		
	* 2.9696	* 2.8927	* 3.0292	* 3.2015	* 125 EFPD	118 % POWER		
	* 2.8197	* 2.7448	* 2.8829	* 3.0540	* 250 EFPD	118 % POWER		
	* 2.6089	* 2.5482	* 2.6751	* 2.8305	* 350 EFPD	118 % POWER		
	* 2.3944	* 2.3477	* 2.4640	* 2.5985	* 500 EFPD	118 % POWER		

CNEI-0400-355
Appendix A, Rev. 0
Page 221 of 312

		H	G	F	E	D	C	B	A

8	*	1.6821	* 1.7056	* 1.4275	* 1.7610	* 1.4176	* 1.5897	* 1.3729	* 2.5823
	*	1.9511	* 1.9381	* 1.7157	* 1.9005	* 1.6030	* 1.7820	* 1.5621	* 2.7846
	*	2.0218	* 1.9656	* 1.6973	* 1.9118	* 1.6211	* 1.8339	* 1.6029	* 2.8054
	*	1.9551	* 1.8526	* 1.5736	* 1.7982	* 1.5563	* 1.7988	* 1.5695	* 2.6467
	*	1.8550	* 1.7499	* 1.4984	* 1.7023	* 1.5013	* 1.7386	* 1.5298	* 2.4798
	*	1.8026	* 1.7117	* 1.4978	* 1.6749	* 1.5120	* 1.7244	* 1.5415	* 2.3249

9	*	1.7056	* 1.3695	* 1.6864	* 1.3754	* 1.6197	* 1.4476	* 1.3374	* 2.5172
	*	1.9381	* 1.5767	* 1.9075	* 1.5601	* 1.8121	* 1.6116	* 1.5238	* 2.7067
	*	1.9656	* 1.6281	* 1.9463	* 1.6044	* 1.8473	* 1.6557	* 1.5643	* 2.7274
	*	1.8526	* 1.5886	* 1.8318	* 1.5659	* 1.7551	* 1.6250	* 1.5415	* 2.5761
	*	1.7499	* 1.5167	* 1.7273	* 1.4930	* 1.6671	* 1.5725	* 1.5064	* 2.4222
	*	1.7117	* 1.4999	* 1.6934	* 1.4757	* 1.6482	* 1.5681	* 1.5281	* 2.2788

10	*	1.4275	* 1.6897	* 1.4873	* 1.5440	* 1.3318	* 1.4516	* 1.3167	* 2.6019
	*	1.7157	* 1.9105	* 1.6934	* 1.7056	* 1.5001	* 1.6159	* 1.5031	* 2.8081
	*	1.6973	* 1.9485	* 1.7423	* 1.7312	* 1.5530	* 1.6508	* 1.5562	* 2.8467
	*	1.5736	* 1.8347	* 1.6845	* 1.6416	* 1.5395	* 1.6012	* 1.5323	* 2.7118
	*	1.4984	* 1.7298	* 1.6057	* 1.5581	* 1.4642	* 1.5394	* 1.5009	* 2.5531
	*	1.4978	* 1.6951	* 1.5850	* 1.5448	* 1.4484	* 1.5304	* 1.5246	* 2.4131

11	*	1.7610	* 1.3774	* 1.5474	* 1.3283	* 1.4548	* 1.3347	* 1.3157	* 2.7478
	*	1.9005	* 1.5629	* 1.7093	* 1.5192	* 1.6112	* 1.4711	* 1.4816	* 2.9612
	*	1.9118	* 1.6071	* 1.7347	* 1.5745	* 1.6442	* 1.5033	* 1.5270	* 3.0057
	*	1.7982	* 1.5679	* 1.6444	* 1.5336	* 1.5679	* 1.4824	* 1.5130	* 2.8657
	*	1.7023	* 1.4952	* 1.5603	* 1.4602	* 1.4915	* 1.4477	* 1.4812	* 2.6931
	*	1.6749	* 1.4774	* 1.5465	* 1.4443	* 1.4736	* 1.4748	* 1.5285	* 2.5365

12	*	1.4176	* 1.6207	* 1.3324	* 1.4552	* 1.4448	* 1.3149	* 2.0484	*
	*	1.6030	* 1.8134	* 1.5010	* 1.6117	* 1.6172	* 1.4879	* 2.2095	*
	*	1.6211	* 1.8492	* 1.5538	* 1.6453	* 1.6618	* 1.5322	* 2.2398	*
	*	1.5563	* 1.7566	* 1.5406	* 1.5688	* 1.6223	* 1.4941	* 2.1469	*
	*	1.5013	* 1.6683	* 1.4650	* 1.4921	* 1.5577	* 1.4605	* 2.0417	*
	*	1.5120	* 1.6488	* 1.4489	* 1.4741	* 1.5423	* 1.4757	* 1.9623	*

13	*	1.5897	* 1.4481	* 1.4522	* 1.3353	* 1.3156	* 2.0890	* 3.4845	*
	*	1.7819	* 1.6121	* 1.6169	* 1.4720	* 1.4887	* 2.2664	* 3.7924	*
	*	1.8339	* 1.6562	* 1.6518	* 1.5041	* 1.5331	* 2.2978	* 3.8126	*
	*	1.7988	* 1.6253	* 1.6019	* 1.4830	* 1.4946	* 2.1851	* 3.5144	*
	*	1.7386	* 1.5727	* 1.5399	* 1.4481	* 1.4607	* 2.0553	* 3.2012	*
	*	1.7244	* 1.5682	* 1.5305	* 1.4750	* 1.4761	* 1.9699	* 2.8988	*

14	*	1.3729	* 1.3379	* 1.3172	* 1.3166	* 2.0502	* 3.5272	*	
	*	1.5621	* 1.5243	* 1.5038	* 1.4826	* 2.2107	* 3.8330	*	
	*	1.6029	* 1.5648	* 1.5569	* 1.5279	* 2.2409	* 3.8530	*	
	*	1.5695	* 1.5418	* 1.5327	* 1.5137	* 2.1491	* 3.5490	*	
	*	1.5298	* 1.5066	* 1.5012	* 1.4816	* 2.0433	* 3.2305	*	
	*	1.5415	* 1.5282	* 1.5248	* 1.5287	* 1.9620	* 2.9233	*	

15	*	2.5823	* 2.5175	* 2.6036	* 2.7499	* 4	EFPD 118	% POWER	
	*	2.7846	* 2.7070	* 2.8101	* 2.9634	* 75	EFPD 118	% POWER	
	*	2.8054	* 2.7277	* 2.8485	* 3.0077	* 125	EFPD 118	% POWER	
	*	2.6467	* 2.5762	* 2.7130	* 2.8671	* 250	EFPD 118	% POWER	
	*	2.4798	* 2.4222	* 2.5539	* 2.6940	* 350	EFPD 118	% POWER	
	*	2.3249	* 2.2787	* 2.4133	* 2.5371	* 500	EFPD 118	% POWER	

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 222 of 312

TABLE A-2 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.7247	* 1.7525	* 1.6049	* 1.8157	* 1.4534	* 1.6129	* 1.3740	* 2.6843
	* 1.9498	* 1.9342	* 1.6901	* 1.8916	* 1.5641	* 1.7537	* 1.5140	* 2.7525
	* 2.0039	* 1.9413	* 1.6483	* 1.8816	* 1.5656	* 1.7921	* 1.5352	* 2.7453
	* 1.9425	* 1.8296	* 1.5258	* 1.7696	* 1.5100	* 1.7733	* 1.5146	* 2.6027
	* 1.8625	* 1.7461	* 1.4720	* 1.6942	* 1.4784	* 1.7368	* 1.4995	* 2.4683
	* 1.8336	* 1.7368	* 1.4979	* 1.6867	* 1.5121	* 1.7428	* 1.5368	* 2.3429
9	* 1.7525	* 1.3921	* 1.7321	* 1.3935	* 1.6527	* 1.4552	* 1.3347	* 2.5982
	* 1.9342	* 1.5541	* 1.9030	* 1.5297	* 1.7956	* 1.5737	* 1.4734	* 2.6645
	* 1.9413	* 1.5885	* 1.9207	* 1.5566	* 1.8151	* 1.6068	* 1.4955	* 2.6587
	* 1.8296	* 1.5434	* 1.8050	* 1.5189	* 1.7270	* 1.5898	* 1.4866	* 2.5226
	* 1.7461	* 1.4927	* 1.7203	* 1.4611	* 1.6569	* 1.5610	* 1.4761	* 2.4023
	* 1.7368	* 1.5066	* 1.7087	* 1.4705	* 1.6617	* 1.5762	* 1.5219	* 2.2908
10	* 1.6049	* 1.7358	* 1.5167	* 1.5712	* 1.3348	* 1.4643	* 1.3131	* 2.6628
	* 1.6901	* 1.9063	* 1.6825	* 1.6844	* 1.4555	* 1.5829	* 1.4504	* 2.7660
	* 1.6483	* 1.9230	* 1.7182	* 1.6935	* 1.4944	* 1.6047	* 1.4861	* 2.7792
	* 1.5258	* 1.8080	* 1.6648	* 1.6084	* 1.4817	* 1.5692	* 1.4766	* 2.6629
	* 1.4720	* 1.7230	* 1.6034	* 1.5440	* 1.4291	* 1.5294	* 1.4715	* 2.5390
	* 1.4979	* 1.7108	* 1.6079	* 1.5558	* 1.4480	* 1.5499	* 1.5213	* 2.4232
11	* 1.8157	* 1.3961	* 1.5749	* 1.3328	* 1.4696	* 1.3344	* 1.3106	* 2.7986
	* 1.8916	* 1.5327	* 1.6885	* 1.4792	* 1.5819	* 1.4181	* 1.4255	* 2.9099
	* 1.8816	* 1.5594	* 1.6972	* 1.5229	* 1.6029	* 1.4378	* 1.4592	* 2.9280
	* 1.7696	* 1.5210	* 1.6114	* 1.4776	* 1.5344	* 1.4318	* 1.4550	* 2.8075
	* 1.6942	* 1.4632	* 1.5463	* 1.4251	* 1.4782	* 1.4212	* 1.4494	* 2.6736
	* 1.6867	* 1.4721	* 1.5574	* 1.4448	* 1.4891	* 1.4799	* 1.5280	* 2.5594
12	* 1.4534	* 1.6538	* 1.3355	* 1.4701	* 1.4585	* 1.3144	* 2.0987	*
	* 1.5641	* 1.7970	* 1.4565	* 1.5824	* 1.5871	* 1.4380	* 2.1637	*
	* 1.5656	* 1.8172	* 1.4952	* 1.6041	* 1.6210	* 1.4657	* 2.1741	*
	* 1.5100	* 1.7286	* 1.4829	* 1.5353	* 1.5939	* 1.4398	* 2.0981	*
	* 1.4784	* 1.6580	* 1.4300	* 1.4789	* 1.5509	* 1.4305	* 2.0223	*
	* 1.5121	* 1.6623	* 1.4485	* 1.4896	* 1.5650	* 1.4784	* 1.9778	*
13	* 1.6129	* 1.4558	* 1.4649	* 1.3350	* 1.3151	* 2.1116	* 3.6107	*
	* 1.7537	* 1.5743	* 1.5840	* 1.4191	* 1.4388	* 2.2173	* 3.7623	*
	* 1.7921	* 1.6073	* 1.6057	* 1.4387	* 1.4666	* 2.2310	* 3.7483	*
	* 1.7733	* 1.5900	* 1.5699	* 1.4324	* 1.4403	* 2.1348	* 3.4715	*
	* 1.7368	* 1.5612	* 1.5299	* 1.4216	* 1.4308	* 2.0345	* 3.2022	*
	* 1.7428	* 1.5763	* 1.5500	* 1.4800	* 1.4788	* 1.9853	* 2.9494	*
14	* 1.3740	* 1.3353	* 1.3137	* 1.3116	* 2.0996	* 3.6578	*	*
	* 1.5140	* 1.4739	* 1.4513	* 1.4266	* 2.1647	* 3.8039	*	*
	* 1.5352	* 1.4960	* 1.4868	* 1.4601	* 2.1751	* 3.7890	*	*
	* 1.5146	* 1.4869	* 1.4769	* 1.4556	* 2.1000	* 3.5064	*	*
	* 1.4995	* 1.4763	* 1.4717	* 1.4498	* 2.0227	* 3.2317	*	*
	* 1.5368	* 1.5219	* 1.5214	* 1.5282	* 1.9773	* 2.9740	*	*
15	* 2.6843	* 2.5985	* 2.6648	* 2.8008	* 4 EFPD	118 % POWER		
	* 2.7525	* 2.6649	* 2.7681	* 2.9121	* 75 EFPD	118 % POWER		
	* 2.7453	* 2.6590	* 2.7811	* 2.9300	* 125 EFPD	118 % POWER		
	* 2.6027	* 2.5227	* 2.6641	* 2.8089	* 250 EFPD	118 % POWER		
	* 2.4683	* 2.4023	* 2.5395	* 2.6744	* 350 EFPD	118 % POWER		
	* 2.3429	* 2.2907	* 2.4234	* 2.5598	* 500 EFPD	118 % POWER		

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 223 of 312

TABLE A-2 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.8047	* 1.8356	* 1.6750	* 1.8974	* 1.5026	* 1.6677	* 1.4098	* 2.7809
	* 1.9978	* 1.9787	* 1.7168	* 1.9268	* 1.5760	* 1.7682	* 1.5162	* 2.7741
	* 2.0404	* 1.9712	* 1.6567	* 1.9024	* 1.5671	* 1.7987	* 1.5251	* 2.7495
	* 1.9847	* 1.8610	* 1.5370	* 1.7955	* 1.5214	* 1.7962	* 1.5195	* 2.6270
	* 1.9192	* 1.7916	* 1.4986	* 1.7353	* 1.5070	* 1.7794	* 1.5234	* 2.5176
	* 1.8967	* 1.7838	* 1.5343	* 1.7372	* 1.5518	* 1.7940	* 1.5726	* 2.4015
9	* 1.8356	* 1.4493	* 1.8115	* 1.4433	* 1.7167	* 1.4955	* 1.3667	* 2.6873
	* 1.9787	* 1.5803	* 1.9461	* 1.5457	* 1.8232	* 1.5813	* 1.4728	* 2.6813
	* 1.9712	* 1.6034	* 1.9481	* 1.5614	* 1.8325	* 1.6083	* 1.4838	* 2.6585
	* 1.8610	* 1.5581	* 1.8335	* 1.5288	* 1.7503	* 1.6073	* 1.4906	* 2.5422
	* 1.7916	* 1.5219	* 1.7637	* 1.4825	* 1.6953	* 1.5964	* 1.4993	* 2.4468
	* 1.7838	* 1.5405	* 1.7587	* 1.5033	* 1.7085	* 1.6190	* 1.5561	* 2.3452
10	* 1.6750	* 1.8156	* 1.5782	* 1.6290	* 1.3713	* 1.5086	* 1.3441	* 2.7512
	* 1.7168	* 1.9497	* 1.7148	* 1.7068	* 1.4590	* 1.5910	* 1.4471	* 2.7821
	* 1.6567	* 1.9506	* 1.7414	* 1.7047	* 1.4897	* 1.6084	* 1.4734	* 2.7794
	* 1.5370	* 1.8367	* 1.6935	* 1.6262	* 1.4839	* 1.5880	* 1.4801	* 2.6803
	* 1.4986	* 1.7665	* 1.6458	* 1.5754	* 1.4476	* 1.5658	* 1.4944	* 2.5795
	* 1.5343	* 1.7608	* 1.6555	* 1.5947	* 1.4790	* 1.5948	* 1.5540	* 2.4695
11	* 1.8974	* 1.4462	* 1.6333	* 1.3715	* 1.5161	* 1.3685	* 1.3396	* 2.8892
	* 1.9268	* 1.5490	* 1.7112	* 1.4871	* 1.5966	* 1.4153	* 1.4196	* 2.9243
	* 1.9024	* 1.5644	* 1.7087	* 1.5238	* 1.6091	* 1.4274	* 1.4468	* 2.9256
	* 1.7955	* 1.5310	* 1.6294	* 1.4807	* 1.5503	* 1.4369	* 1.4572	* 2.8307
	* 1.7353	* 1.4848	* 1.5777	* 1.4428	* 1.5084	* 1.4446	* 1.4709	* 2.7257
	* 1.7372	* 1.5050	* 1.5964	* 1.4783	* 1.5309	* 1.5181	* 1.5623	* 2.6150
12	* 1.5026	* 1.7180	* 1.3721	* 1.5166	* 1.5037	* 1.3482	* 2.1569	*
	* 1.5760	* 1.8247	* 1.4601	* 1.5971	* 1.6007	* 1.4373	* 2.1641	*
	* 1.5671	* 1.8347	* 1.4907	* 1.6104	* 1.6283	* 1.4551	* 2.1624	*
	* 1.5214	* 1.7520	* 1.4852	* 1.5512	* 1.6151	* 1.4442	* 2.1068	*
	* 1.5070	* 1.6964	* 1.4484	* 1.5091	* 1.5887	* 1.4531	* 2.0535	*
	* 1.5518	* 1.7091	* 1.4795	* 1.5314	* 1.6197	* 1.5208	* 2.0230	*
13	* 1.6677	* 1.4962	* 1.5095	* 1.3692	* 1.3490	* 2.1755	* 3.7457	*
	* 1.7682	* 1.5820	* 1.5918	* 1.4163	* 1.4381	* 2.2271	* 3.7998	*
	* 1.7987	* 1.6089	* 1.6096	* 1.4283	* 1.4560	* 2.2285	* 3.7625	*
	* 1.7962	* 1.6076	* 1.5888	* 1.4374	* 1.4446	* 2.1497	* 3.5114	*
	* 1.7794	* 1.5966	* 1.5663	* 1.4449	* 1.4533	* 2.0715	* 3.2739	*
	* 1.7940	* 1.6191	* 1.5950	* 1.5182	* 1.5211	* 2.0408	* 3.0431	*
14	* 1.4098	* 1.3674	* 1.3448	* 1.3408	* 2.1580	* 3.7970	*	
	* 1.5162	* 1.4735	* 1.4481	* 1.4207	* 2.1653	* 3.8441	*	
	* 1.5251	* 1.4844	* 1.4741	* 1.4478	* 2.1635	* 3.8058	*	
	* 1.5195	* 1.4909	* 1.4805	* 1.4578	* 2.1076	* 3.5485	*	
	* 1.5234	* 1.4995	* 1.4946	* 1.4712	* 2.0538	* 3.3054	*	
	* 1.5726	* 1.5561	* 1.5540	* 1.5624	* 2.0224	* 3.0686	*	
15	* 2.7809	* 2.6877	* 2.7534	* 2.8917	* 4 EFPD	118 % POWER		
	* 2.7741	* 2.6818	* 2.7843	* 2.9268	* 75 EFPD	118 % POWER		
	* 2.7495	* 2.6588	* 2.7814	* 2.9278	* 125 EFPD	118 % POWER		
	* 2.6270	* 2.5424	* 2.6813	* 2.8320	* 250 EFPD	118 % POWER		
	* 2.5176	* 2.4468	* 2.5800	* 2.7265	* 350 EFPD	118 % POWER		
	* 2.4015	* 2.3451	* 2.4696	* 2.6153	* 500 EFPD	118 % POWER		

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355

Appendix A, Rev. 0

Page 224 of 312

TABLE A-2 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.8935	* 1.9278	* 1.7487	* 1.9848	* 1.5524	* 1.7236	* 1.4480	* 2.9178 *
	* 2.0637	* 2.0414	* 1.7563	* 1.9779	* 1.5998	* 1.7974	* 1.5286	* 2.8504 *
	* 2.0987	* 2.0231	* 1.6805	* 1.9433	* 1.5824	* 1.8228	* 1.5286	* 2.8131 *
	* 2.0512	* 1.9180	* 1.5654	* 1.8443	* 1.5485	* 1.8399	* 1.5388	* 2.7125 *
	* 1.9979	* 1.8609	* 1.5395	* 1.7969	* 1.5485	* 1.8392	* 1.5586	* 2.6219 *
	* 1.9689	* 1.8504	* 1.5791	* 1.8006	* 1.5981	* 1.8553	* 1.6122	* 2.4968 *
9	* 1.9277	* 1.5091	* 1.8970	* 1.4958	* 1.7873	* 1.5403	* 1.4022	* 2.8162 *
	* 2.0414	* 1.6168	* 2.0052	* 1.5725	* 1.8664	* 1.6019	* 1.4834	* 2.7523 *
	* 2.0231	* 1.6322	* 1.9967	* 1.5805	* 1.8695	* 1.6256	* 1.4859	* 2.7173 *
	* 1.9180	* 1.5889	* 1.8856	* 1.5516	* 1.7966	* 1.6424	* 1.5091	* 2.6228 *
	* 1.8609	* 1.5640	* 1.8273	* 1.5174	* 1.7547	* 1.6461	* 1.5337	* 2.5466 *
	* 1.8504	* 1.5839	* 1.8228	* 1.5423	* 1.7702	* 1.6708	* 1.5945	* 2.4387 *
10	* 1.7487	* 1.9016	* 1.6447	* 1.6927	* 1.4121	* 1.5547	* 1.3782	* 2.8814 *
	* 1.7563	* 2.0090	* 1.7603	* 1.7430	* 1.4744	* 1.6127	* 1.4557	* 2.8550 *
	* 1.6805	* 1.9993	* 1.7809	* 1.7333	* 1.5001	* 1.6297	* 1.4750	* 2.8414 *
	* 1.5654	* 1.8890	* 1.7420	* 1.6638	* 1.5023	* 1.6259	* 1.4986	* 2.7741 *
	* 1.5395	* 1.8303	* 1.7066	* 1.6252	* 1.4788	* 1.6182	* 1.5297	* 2.6954 *
	* 1.5791	* 1.8251	* 1.7167	* 1.6475	* 1.5148	* 1.6482	* 1.5917	* 2.5810 *
11	* 1.9847	* 1.4990	* 1.6975	* 1.4148	* 1.5696	* 1.4074	* 1.3746	* 3.0298 *
	* 1.9779	* 1.5760	* 1.7478	* 1.5073	* 1.6255	* 1.4258	* 1.4277	* 3.0043 *
	* 1.9433	* 1.5837	* 1.7376	* 1.5397	* 1.6328	* 1.4328	* 1.4508	* 2.9947 *
	* 1.8443	* 1.5549	* 1.6671	* 1.5011	* 1.5860	* 1.4582	* 1.4755	* 2.9263 *
	* 1.7969	* 1.5198	* 1.6276	* 1.4752	* 1.5569	* 1.4824	* 1.5057	* 2.8427 *
	* 1.8006	* 1.5440	* 1.6492	* 1.5138	* 1.5798	* 1.5574	* 1.5985	* 2.7230 *
12	* 1.5524	* 1.7887	* 1.4130	* 1.5701	* 1.5559	* 1.3880	* 2.2606	* 2.9178 *
	* 1.5998	* 1.8681	* 1.4756	* 1.6267	* 1.6293	* 1.4511	* 2.2210	* 2.8504 *
	* 1.5824	* 1.8718	* 1.5012	* 1.6340	* 1.6538	* 1.4622	* 2.2107	* 2.8131 *
	* 1.5485	* 1.7984	* 1.5036	* 1.5869	* 1.6566	* 1.4653	* 2.1758	* 2.7125 *
	* 1.5485	* 1.7559	* 1.4797	* 1.5576	* 1.6444	* 1.4896	* 2.1404	* 2.6219 *
	* 1.5981	* 1.7708	* 1.5153	* 1.5802	* 1.6713	* 1.5547	* 2.1022	* 2.4968 *
13	* 1.7236	* 1.5412	* 1.5557	* 1.4082	* 1.3889	* 2.2721	* 3.9547	* 2.9178 *
	* 1.7974	* 1.6028	* 1.6137	* 1.4270	* 1.4520	* 2.2813	* 3.9309	* 2.8504 *
	* 1.8228	* 1.6265	* 1.6310	* 1.4338	* 1.4632	* 2.2743	* 3.8767	* 2.8131 *
	* 1.8399	* 1.6428	* 1.6268	* 1.4588	* 1.4658	* 2.2143	* 3.6498	* 2.7125 *
	* 1.8392	* 1.6463	* 1.6187	* 1.4827	* 1.4899	* 2.1535	* 3.4326	* 2.6219 *
	* 1.8553	* 1.6708	* 1.6483	* 1.5575	* 1.5551	* 2.1141	* 3.1761	* 2.4968 *
14	* 1.4480	* 1.4030	* 1.3790	* 1.3759	* 2.2617	* 4.0149	* 2.9178 *	
	* 1.5286	* 1.4842	* 1.4568	* 1.4289	* 2.2220	* 3.9826	* 2.8504 *	
	* 1.5286	* 1.4866	* 1.4758	* 1.4520	* 2.2117	* 3.9270	* 2.8131 *	
	* 1.5388	* 1.5094	* 1.4990	* 1.4762	* 2.1775	* 3.6931	* 2.7125 *	
	* 1.5586	* 1.5339	* 1.5299	* 1.5060	* 2.1405	* 3.4699	* 2.6219 *	
	* 1.6123	* 1.5945	* 1.5917	* 1.5986	* 2.1014	* 3.2067	* 2.4968 *	
15	* 2.9178	* 2.8167	* 2.8840	* 3.0327	* 4 EFPD	118 % POWER		
	* 2.8503	* 2.7528	* 2.8576	* 3.0070	* 75 EFPD	118 % POWER		
	* 2.8131	* 2.7177	* 2.8436	* 2.9971	* 125 EFPD	118 % POWER		
	* 2.7125	* 2.6229	* 2.7755	* 2.9278	* 250 EFPD	118 % POWER		
	* 2.6219	* 2.5466	* 2.6959	* 2.8436	* 350 EFPD	118 % POWER		
	* 2.4968	* 2.4386	* 2.5811	* 2.7233	* 500 EFPD	118 % POWER		

CNEI-0400-355
Appendix A, Rev. 0
Page 225 of 312

		H	G	F	E	D	C	B	A								

8	*	2.0162	*	2.0517	*	1.8520	*	2.0973	*	1.6272	*	1.8040	*	1.5105	*	3.0730	*
	*	2.1741	*	2.1438	*	1.8341	*	2.0650	*	1.6575	*	1.8599	*	1.5739	*	2.9642	*
	*	2.2036	*	2.1161	*	1.7431	*	2.0215	*	1.6333	*	1.8821	*	1.5674	*	2.9164	*
	*	2.1635	*	2.0135	*	1.6300	*	1.9293	*	1.6106	*	1.9187	*	1.5927	*	2.8352	*
	*	2.1189	*	1.9649	*	1.6131	*	1.8910	*	1.6223	*	1.9308	*	1.6257	*	2.7571	*
	*	2.0744	*	1.9413	*	1.6459	*	1.8808	*	1.6629	*	1.9302	*	1.6692	*	2.6014	*

9	*	2.0517	*	1.5951	*	2.0098	*	1.5740	*	1.8833	*	1.6100	*	1.4632	*	2.9650	*
	*	2.1438	*	1.6882	*	2.1014	*	1.6326	*	1.9441	*	1.6540	*	1.5263	*	2.8604	*
	*	2.1161	*	1.6977	*	2.0844	*	1.6349	*	1.9428	*	1.6758	*	1.5230	*	2.8144	*
	*	2.0135	*	1.6574	*	1.9752	*	1.6106	*	1.8781	*	1.7103	*	1.5618	*	2.7396	*
	*	1.9649	*	1.6412	*	1.9253	*	1.5848	*	1.8459	*	1.7254	*	1.6000	*	2.6767	*
	*	1.9413	*	1.6542	*	1.9071	*	1.6053	*	1.8519	*	1.7374	*	1.6541	*	2.5388	*

10	*	1.8520	*	2.0149	*	1.7376	*	1.7840	*	1.4807	*	1.6276	*	1.4386	*	3.0366	*
	*	1.8341	*	2.1056	*	1.8385	*	1.8130	*	1.5233	*	1.6667	*	1.4972	*	2.9675	*
	*	1.7431	*	2.0873	*	1.8549	*	1.7972	*	1.5453	*	1.6854	*	1.5117	*	2.9449	*
	*	1.6300	*	1.9787	*	1.8246	*	1.7355	*	1.5569	*	1.6976	*	1.5513	*	2.9010	*
	*	1.6131	*	1.9288	*	1.7981	*	1.7058	*	1.5434	*	1.7018	*	1.5960	*	2.8363	*
	*	1.6459	*	1.9095	*	1.7999	*	1.7231	*	1.5784	*	1.7264	*	1.6542	*	2.6929	*

11	*	2.0973	*	1.5776	*	1.7894	*	1.4878	*	1.6534	*	1.4737	*	1.4365	*	3.1988	*
	*	2.0650	*	1.6364	*	1.8183	*	1.5631	*	1.6870	*	1.4697	*	1.4686	*	3.1249	*
	*	2.0215	*	1.6383	*	1.8019	*	1.5911	*	1.6917	*	1.4727	*	1.4877	*	3.1067	*
	*	1.9293	*	1.6140	*	1.7391	*	1.5579	*	1.6556	*	1.5141	*	1.5287	*	3.0630	*
	*	1.8910	*	1.5873	*	1.7084	*	1.5411	*	1.6359	*	1.5521	*	1.5722	*	2.9947	*
	*	1.8808	*	1.6070	*	1.7248	*	1.5782	*	1.6547	*	1.6250	*	1.6627	*	2.8498	*

12	*	1.6272	*	1.8848	*	1.4818	*	1.6539	*	1.6395	*	1.4575	*	2.3899	*		
	*	1.6575	*	1.9459	*	1.5247	*	1.6884	*	1.6952	*	1.5001	*	2.3091	*		
	*	1.6333	*	1.9453	*	1.5464	*	1.6930	*	1.7178	*	1.5059	*	2.2920	*		
	*	1.6106	*	1.8799	*	1.5583	*	1.6565	*	1.7360	*	1.5233	*	2.2763	*		
	*	1.6223	*	1.8471	*	1.5443	*	1.6365	*	1.7348	*	1.5603	*	2.2546	*		
	*	1.6629	*	1.8524	*	1.5788	*	1.6551	*	1.7542	*	1.6207	*	2.2011	*		

13	*	1.8040	*	1.6111	*	1.6288	*	1.4748	*	1.4585	*	2.4059	*	4.2075	*		
	*	1.8599	*	1.6551	*	1.6680	*	1.4709	*	1.5011	*	2.3781	*	4.1148	*		
	*	1.8821	*	1.6764	*	1.6869	*	1.4738	*	1.5070	*	2.3641	*	4.0460	*		
	*	1.9187	*	1.7108	*	1.6986	*	1.5147	*	1.5238	*	2.3206	*	3.8399	*		
	*	1.9308	*	1.7257	*	1.7024	*	1.5524	*	1.5606	*	2.2721	*	3.6345	*		
	*	1.9303	*	1.7374	*	1.7266	*	1.6251	*	1.6210	*	2.2148	*	3.3382	*		

14	*	1.5105	*	1.4642	*	1.4396	*	1.4380	*	2.3910	*	4.2766	*				
	*	1.5739	*	1.5271	*	1.4985	*	1.4700	*	2.3102	*	4.1739	*				
	*	1.5674	*	1.5238	*	1.5127	*	1.4890	*	2.2931	*	4.1032	*				
	*	1.5927	*	1.5622	*	1.5518	*	1.5293	*	2.2778	*	3.8897	*				
	*	1.6257	*	1.6001	*	1.5961	*	1.5725	*	2.2545	*	3.6777	*				
	*	1.6692	*	1.6541	*	1.6542	*	1.6627	*	2.2001	*	3.3736	*				

15	*	3.0730	*	2.9657	*	3.0395	*	3.2021	*	4	EFPD	118	%	POWER			
	*	2.9642	*	2.8610	*	2.9703	*	3.1280	*	75	EFPD	118	%	POWER			
	*	2.9164	*	2.8149	*	2.9473	*	3.1094	*	125	EFPD	118	%	POWER			
	*	2.8352	*	2.7398	*	2.9025	*	3.0646	*	250	EFPD	118	%	POWER			
	*	2.7571	*	2.6767	*	2.8369	*	2.9955	*	350	EFPD	118	%	POWER			
	*	2.6014	*	2.5386	*	2.6930	*	2.8501	*	500	EFPD	118	%	POWER			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 226 of 312

TABLE A-2 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 2.1571	* 2.1885	* 1.9607	* 2.2166	* 1.7058	* 1.8918	* 1.5778	* 3.2456
	* 2.3064	* 2.2610	* 1.9218	* 2.1642	* 1.7252	* 1.9375	* 1.6313	* 3.1004
	* 2.3324	* 2.2267	* 1.8182	* 2.1158	* 1.6974	* 1.9597	* 1.6207	* 3.0481
	* 2.3015	* 2.1297	* 1.7097	* 2.0332	* 1.6876	* 2.0164	* 1.6615	* 2.9878
	* 2.2670	* 2.0907	* 1.7028	* 2.0053	* 1.7114	* 2.0415	* 1.7077	* 2.9220
	* 2.1976	* 2.0467	* 1.7236	* 1.9795	* 1.7408	* 2.0238	* 1.7380	* 2.7377
9	* 2.1885	* 1.6859	* 2.1307	* 1.6573	* 1.9879	* 1.6866	* 1.5294	* 3.1359
	* 2.2610	* 1.7698	* 2.2106	* 1.7048	* 2.0381	* 1.7216	* 1.5825	* 2.9975
	* 2.2267	* 1.7761	* 2.1888	* 1.7038	* 2.0345	* 1.7418	* 1.5758	* 2.9478
	* 2.1297	* 1.7412	* 2.0836	* 1.6855	* 1.9804	* 1.7950	* 1.6303	* 2.8944
	* 2.0907	* 1.7341	* 2.0433	* 1.6690	* 1.9583	* 1.8218	* 1.6820	* 2.8428
	* 2.0467	* 1.7320	* 2.0078	* 1.6761	* 1.9469	* 1.8173	* 1.7215	* 2.6741
10	* 1.9607	* 2.1363	* 1.8367	* 1.8820	* 1.5552	* 1.7069	* 1.5033	* 3.2135
	* 1.9218	* 2.2151	* 1.9306	* 1.8984	* 1.5878	* 1.7373	* 1.5541	* 3.1137
	* 1.8182	* 2.1918	* 1.9452	* 1.8788	* 1.6083	* 1.7600	* 1.5651	* 3.0862
	* 1.7097	* 2.0875	* 1.9259	* 1.8265	* 1.6294	* 1.7899	* 1.6209	* 3.0663
	* 1.7028	* 2.0472	* 1.9092	* 1.8068	* 1.6258	* 1.8060	* 1.6796	* 3.0178
	* 1.7236	* 2.0103	* 1.8927	* 1.8073	* 1.6483	* 1.8115	* 1.7208	* 2.8371
11	* 2.2166	* 1.6612	* 1.8879	* 1.5691	* 1.7485	* 1.5457	* 1.5055	* 3.3999
	* 2.1642	* 1.7088	* 1.9040	* 1.6363	* 1.7687	* 1.5307	* 1.5264	* 3.2904
	* 2.1158	* 1.7075	* 1.8838	* 1.6595	* 1.7712	* 1.5310	* 1.5433	* 3.2678
	* 2.0332	* 1.6891	* 1.8304	* 1.6336	* 1.7470	* 1.5894	* 1.6008	* 3.2500
	* 2.0053	* 1.6717	* 1.8095	* 1.6258	* 1.7373	* 1.6410	* 1.6572	* 3.1950
	* 1.9795	* 1.6779	* 1.8092	* 1.6508	* 1.7399	* 1.7024	* 1.7343	* 3.0012
12	* 1.7058	* 1.9895	* 1.5564	* 1.7490	* 1.7390	* 1.5370	* 2.5424	*
	* 1.7252	* 2.0400	* 1.5893	* 1.7702	* 1.7862	* 1.5674	* 2.4347	*
	* 1.6974	* 2.0372	* 1.6095	* 1.7725	* 1.8083	* 1.5706	* 2.4134	*
	* 1.6876	* 1.9823	* 1.6309	* 1.7479	* 1.8428	* 1.6023	* 2.4174	*
	* 1.7114	* 1.9595	* 1.6267	* 1.7380	* 1.8532	* 1.6517	* 2.4084	*
	* 1.7408	* 1.9473	* 1.6487	* 1.7403	* 1.8563	* 1.7019	* 2.3268	*
13	* 1.8918	* 1.6879	* 1.7084	* 1.5469	* 1.5381	* 2.5657	* 4.4947	*
	* 1.9375	* 1.7230	* 1.7388	* 1.5321	* 1.5688	* 2.5122	* 4.3579	*
	* 1.9597	* 1.7426	* 1.7613	* 1.5322	* 1.5718	* 2.4939	* 4.2784	*
	* 2.0164	* 1.7955	* 1.7910	* 1.5901	* 1.6028	* 2.4677	* 4.0926	*
	* 2.0415	* 1.8221	* 1.8067	* 1.6412	* 1.6520	* 2.4297	* 3.8955	*
	* 2.0238	* 1.8174	* 1.8117	* 1.7023	* 1.7022	* 2.3467	* 3.5388	*
14	* 1.5778	* 1.5305	* 1.5045	* 1.5071	* 2.5435	* 4.5741	*	
	* 1.6313	* 1.5835	* 1.5555	* 1.5280	* 2.4359	* 4.4258	*	
	* 1.6207	* 1.5766	* 1.5662	* 1.5446	* 2.4144	* 4.3438	*	
	* 1.6615	* 1.6307	* 1.6214	* 1.6015	* 2.4186	* 4.1502	*	
	* 1.7077	* 1.6822	* 1.6798	* 1.6574	* 2.4100	* 3.9461	*	
	* 1.7380	* 1.7215	* 1.7208	* 1.7343	* 2.3256	* 3.5800	*	
15	* 3.2456	* 3.1367	* 3.2168	* 3.4037	* 4 EFPD	118 % POWER		
	* 3.1004	* 2.9982	* 3.1168	* 3.2939	* 75 EFPD	118 % POWER		
	* 3.0481	* 2.9483	* 3.0889	* 3.2708	* 125 EFPD	118 % POWER		
	* 2.9878	* 2.8946	* 3.0678	* 3.2518	* 250 EFPD	118 % POWER		
	* 2.9220	* 2.8428	* 3.0186	* 3.1960	* 350 EFPD	118 % POWER		
	* 2.7377	* 2.6739	* 2.8374	* 3.0018	* 500 EFPD	118 % POWER		

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 227 of 312

TABLE A-2 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 2.3145 *	* 2.3458 *	* 2.0986 *	* 2.3801 *	* 1.8304 *	* 2.0171 *	* 1.6862 *	* 3.4193 *
	* 2.4501 *	* 2.4038 *	* 2.0514 *	* 2.3055 *	* 1.8368 *	* 2.0509 *	* 1.7300 *	* 3.2394 *
	* 2.4784 *	* 2.3713 *	* 1.9408 *	* 2.2497 *	* 1.8062 *	* 2.0733 *	* 1.7168 *	* 3.1800 *
	* 2.4725 *	* 2.2801 *	* 1.8332 *	* 2.1738 *	* 1.8081 *	* 2.1492 *	* 1.7733 *	* 3.1381 *
	* 2.4439 *	* 2.2456 *	* 1.8329 *	* 2.1513 *	* 1.8400 *	* 2.1814 *	* 1.8292 *	* 3.0770 *
	* 2.3733 *	* 2.1993 *	* 1.8545 *	* 2.1226 *	* 1.8705 *	* 2.1614 *	* 1.8570 *	* 2.8764 *
9	* 2.3458 *	* 1.8174 *	* 2.2903 *	* 1.7790 *	* 2.1274 *	* 1.7989 *	* 1.6341 *	* 3.2960 *
	* 2.4038 *	* 1.8940 *	* 2.3590 *	* 1.8175 *	* 2.1674 *	* 1.8236 *	* 1.6787 *	* 3.1239 *
	* 2.3713 *	* 1.8975 *	* 2.3330 *	* 1.8147 *	* 2.1619 *	* 1.8439 *	* 1.6708 *	* 3.0685 *
	* 2.2801 *	* 1.8699 *	* 2.2290 *	* 1.8057 *	* 2.1158 *	* 1.9146 *	* 1.7420 *	* 3.0322 *
	* 2.2456 *	* 1.8695 *	* 2.1916 *	* 1.7951 *	* 2.0994 *	* 1.9480 *	* 1.8041 *	* 2.9869 *
	* 2.1993 *	* 1.8652 *	* 2.1534 *	* 1.8003 *	* 2.0700 *	* 1.9391 *	* 1.8394 *	* 2.8061 *
10	* 2.0986 *	* 2.2964 *	* 1.9712 *	* 2.0160 *	* 1.6703 *	* 1.8229 *	* 1.6076 *	* 3.3895 *
	* 2.0514 *	* 2.3639 *	* 2.0585 *	* 2.0204 *	* 1.6933 *	* 1.8432 *	* 1.6525 *	* 3.2552 *
	* 1.9408 *	* 2.3363 *	* 2.0725 *	* 1.9977 *	* 1.7146 *	* 1.8674 *	* 1.6613 *	* 3.2252 *
	* 1.8332 *	* 2.2335 *	* 2.0614 *	* 1.9525 *	* 1.7477 *	* 1.9190 *	* 1.7343 *	* 3.2110 *
	* 1.8329 *	* 2.1959 *	* 2.0508 *	* 1.9374 *	* 1.7523 *	* 1.9440 *	* 1.8035 *	* 3.1624 *
	* 1.8545 *	* 2.1562 *	* 2.0303 *	* 1.9334 *	* 1.7680 *	* 1.9384 *	* 1.8392 *	* 2.9610 *
11	* 2.3801 *	* 1.7833 *	* 2.0223 *	* 1.6914 *	* 1.8815 *	* 1.6601 *	* 1.6135 *	* 3.5763 *
	* 2.3055 *	* 1.8220 *	* 2.0265 *	* 1.7510 *	* 1.8871 *	* 1.6337 *	* 1.6238 *	* 3.4356 *
	* 2.2497 *	* 1.8187 *	* 2.0032 *	* 1.7701 *	* 1.8883 *	* 1.6332 *	* 1.6419 *	* 3.4101 *
	* 2.1738 *	* 1.8095 *	* 1.9563 *	* 1.7524 *	* 1.8739 *	* 1.7085 *	* 1.7174 *	* 3.4151 *
	* 2.1513 *	* 1.7980 *	* 1.9403 *	* 1.7523 *	* 1.8693 *	* 1.7729 *	* 1.7856 *	* 3.3665 *
	* 2.1226 *	* 1.8022 *	* 1.9354 *	* 1.7717 *	* 1.8623 *	* 1.8243 *	* 1.8530 *	* 3.1483 *
12	* 1.8304 *	* 2.1292 *	* 1.6717 *	* 1.8820 *	* 1.8737 *	* 1.6565 *	* 2.6812 *	
	* 1.8368 *	* 2.1695 *	* 1.6949 *	* 1.8887 *	* 1.9110 *	* 1.6750 *	* 2.5483 *	
	* 1.8062 *	* 2.1649 *	* 1.7160 *	* 1.8897 *	* 1.9338 *	* 1.6776 *	* 2.5249 *	
	* 1.8081 *	* 2.1178 *	* 1.7493 *	* 1.8748 *	* 1.9845 *	* 1.7276 *	* 2.5477 *	
	* 1.8400 *	* 2.1006 *	* 1.7533 *	* 1.8699 *	* 2.0044 *	* 1.7902 *	* 2.5456 *	
	* 1.8705 *	* 2.0712 *	* 1.7684 *	* 1.8626 *	* 1.9928 *	* 1.8239 *	* 2.4334 *	
13	* 2.0171 *	* 1.8004 *	* 1.8246 *	* 1.6615 *	* 1.6578 *	* 2.7367 *	* 4.7566 *	
	* 2.0509 *	* 1.8246 *	* 1.8450 *	* 1.6352 *	* 1.6765 *	* 2.6606 *	* 4.5760 *	
	* 2.0733 *	* 1.8449 *	* 1.8690 *	* 1.6345 *	* 1.6788 *	* 2.6390 *	* 4.4893 *	
	* 2.1492 *	* 1.9151 *	* 1.9203 *	* 1.7092 *	* 1.7282 *	* 2.6286 *	* 4.3231 *	
	* 2.1814 *	* 1.9484 *	* 1.9448 *	* 1.7731 *	* 1.7904 *	* 2.5962 *	* 4.1265 *	
	* 2.1614 *	* 1.9392 *	* 1.9386 *	* 1.8242 *	* 1.8243 *	* 2.4782 *	* 3.7100 *	
14	* 1.6862 *	* 1.6355 *	* 1.6090 *	* 1.6153 *	* 2.6830 *	* 4.8392 *		
	* 1.7300 *	* 1.6798 *	* 1.6541 *	* 1.6255 *	* 2.5500 *	* 4.6459 *		
	* 1.7168 *	* 1.6718 *	* 1.6625 *	* 1.6434 *	* 2.5266 *	* 4.5570 *		
	* 1.7733 *	* 1.7425 *	* 1.7348 *	* 1.7182 *	* 2.5485 *	* 4.3817 *		
	* 1.8292 *	* 1.8043 *	* 1.8037 *	* 1.7859 *	* 2.5457 *	* 4.1777 *		
	* 1.8570 *	* 1.8393 *	* 1.8391 *	* 1.8529 *	* 2.4325 *	* 3.7561 *		
15	* 3.4193 *	* 3.2968 *	* 3.3931 *	* 3.5805 *	4 EFPD	118 % POWER		
	* 3.2394 *	* 3.1247 *	* 3.2586 *	* 3.4394 *	75 EFPD	118 % POWER		
	* 3.1800 *	* 3.0691 *	* 3.2281 *	* 3.4133 *	125 EFPD	118 % POWER		
	* 3.1381 *	* 3.0324 *	* 3.2123 *	* 3.4169 *	250 EFPD	118 % POWER		
	* 3.0770 *	* 2.9869 *	* 3.1629 *	* 3.3674 *	350 EFPD	118 % POWER		
	* 2.8764 *	* 2.8060 *	* 2.9611 *	* 3.1486 *	500 EFPD	118 % POWER		

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 228 of 312

TABLE A-2 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 2.4179	* 2.4508	* 2.1732	* 2.4817	* 1.9026	* 2.1040	* 1.7470	* 3.6320 *
	* 2.5451	* 2.4935	* 2.1102	* 2.4015	* 1.9018	* 2.1298	* 1.7825	* 3.4181 *
	* 2.5742	* 2.4591	* 2.0026	* 2.3520	* 1.8698	* 2.1555	* 1.7687	* 3.3567 *
	* 2.5880	* 2.3998	* 1.9172	* 2.2904	* 1.8883	* 2.2554	* 1.8422	* 3.3373 *
	* 2.5846	* 2.3880	* 1.9285	* 2.2792	* 1.9337	* 2.3023	* 1.9109	* 3.2857 *
	* 2.5333	* 2.3528	* 1.9628	* 2.2613	* 1.9748	* 2.2868	* 1.9462	* 3.0757 *
9	* 2.4508	* 1.8806	* 2.3883	* 1.8595	* 2.2352	* 1.8759	* 1.6979	* 3.5042 *
	* 2.4935	* 1.9482	* 2.4437	* 1.8891	* 2.2680	* 1.8903	* 1.7331	* 3.2989 *
	* 2.4591	* 1.9572	* 2.4184	* 1.8864	* 2.2642	* 1.9139	* 1.7245	* 3.2401 *
	* 2.3998	* 1.9582	* 2.3499	* 1.8854	* 2.2346	* 2.0058	* 1.8132	* 3.2266 *
	* 2.3880	* 1.9686	* 2.3271	* 1.8853	* 2.2298	* 2.0523	* 1.8891	* 3.1895 *
	* 2.3528	* 1.9758	* 2.2984	* 1.9004	* 2.2228	* 2.0488	* 1.9315	* 2.9965 *
10	* 2.1732	* 2.3943	* 2.0736	* 2.1178	* 1.7491	* 1.9064	* 1.6716	* 3.6019 *
	* 2.1102	* 2.4486	* 2.1558	* 2.1112	* 1.7632	* 1.9196	* 1.7117	* 3.4393 *
	* 2.0026	* 2.4216	* 2.1714	* 2.0882	* 1.7858	* 1.9465	* 1.7178	* 3.4083 *
	* 1.9172	* 2.3540	* 2.1782	* 2.0579	* 1.8295	* 2.0279	* 1.8089	* 3.4360 *
	* 1.9285	* 2.3314	* 2.1795	* 2.0547	* 1.8455	* 2.0653	* 1.8918	* 3.4011 *
	* 1.9628	* 2.3013	* 2.1673	* 2.0607	* 1.8688	* 2.0671	* 1.9347	* 3.1944 *
11	* 2.4817	* 1.8640	* 2.1247	* 1.7750	* 1.9835	* 1.7359	* 1.6874	* 3.8197 *
	* 2.4015	* 1.8938	* 2.1177	* 1.8279	* 1.9801	* 1.6998	* 1.6878	* 3.6486 *
	* 2.3520	* 1.8906	* 2.0939	* 1.8459	* 1.9816	* 1.6984	* 1.7048	* 3.6228 *
	* 2.2904	* 1.8892	* 2.0623	* 1.8392	* 1.9826	* 1.7934	* 1.7975	* 3.6573 *
	* 2.2792	* 1.8882	* 2.0578	* 1.8488	* 1.9888	* 1.8717	* 1.8781	* 3.6187 *
	* 2.2613	* 1.9024	* 2.0628	* 1.8738	* 1.9871	* 1.9316	* 1.9529	* 3.3864 *
12	* 1.9026	* 2.2371	* 1.7506	* 1.9840	* 1.9750	* 1.7377	* 2.8860	*
	* 1.9018	* 2.2702	* 1.7649	* 1.9818	* 2.0058	* 1.7448	* 2.7230	*
	* 1.8698	* 2.2671	* 1.7873	* 1.9830	* 2.0319	* 1.7479	* 2.6977	*
	* 1.8883	* 2.2367	* 1.8312	* 1.9836	* 2.1033	* 1.8123	* 2.7427	*
	* 1.9336	* 2.2310	* 1.8465	* 1.9893	* 2.1341	* 1.8862	* 2.7520	*
	* 1.9748	* 2.2232	* 1.8691	* 1.9874	* 2.1261	* 1.9257	* 2.6357	*
13	* 2.1040	* 1.8776	* 1.9084	* 1.7374	* 1.7390	* 2.9255	* 5.1109	*
	* 2.1298	* 1.8915	* 1.9216	* 1.7014	* 1.7464	* 2.8241	* 4.9051	*
	* 2.1555	* 1.9149	* 1.9482	* 1.6998	* 1.7492	* 2.8017	* 4.8123	*
	* 2.2554	* 2.0064	* 2.0293	* 1.7941	* 1.8129	* 2.8119	* 4.6665	*
	* 2.3023	* 2.0527	* 2.0660	* 1.8719	* 1.8864	* 2.7891	* 4.4680	*
	* 2.2868	* 2.0490	* 2.0673	* 1.9315	* 1.9260	* 2.6663	* 4.0238	*
14	* 1.7470	* 1.6994	* 1.6731	* 1.6894	* 2.8875	* 5.2062	*	*
	* 1.7825	* 1.7343	* 1.7132	* 1.6897	* 2.7246	* 4.9896	*	*
	* 1.7687	* 1.7256	* 1.7191	* 1.7064	* 2.6990	* 4.8935	*	*
	* 1.8422	* 1.8137	* 1.8095	* 1.7983	* 2.7441	* 4.7394	*	*
	* 1.9109	* 1.8892	* 1.8919	* 1.8783	* 2.7524	* 4.5331	*	*
	* 1.9462	* 1.9314	* 1.9346	* 1.9529	* 2.6344	* 4.0768	*	*
15	* 3.6320	* 3.5052	* 3.6059	* 3.8243	* 4 EFPD	118 % POWER		
	* 3.4181	* 3.2998	* 3.4430	* 3.6528	* 75 EFPD	118 % POWER		
	* 3.3567	* 3.2408	* 3.4115	* 3.6264	* 125 EFPD	118 % POWER		
	* 3.3373	* 3.2268	* 3.4373	* 3.6594	* 250 EFPD	118 % POWER		
	* 3.2857	* 3.1895	* 3.4016	* 3.6199	* 350 EFPD	118 % POWER		
	* 3.0757	* 2.9963	* 3.1944	* 3.3867	* 500 EFPD	118 % POWER		

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 229 of 312

TABLE A-2 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 2.5302	* 2.5665	* 2.2721	* 2.5975	* 2.0032	* 2.2246	* 1.8428	* 3.8137 *
	* 2.6548	* 2.6019	* 2.1971	* 2.5020	* 1.9943	* 2.2405	* 1.8697	* 3.5992 *
	* 2.6777	* 2.5642	* 2.0829	* 2.4511	* 1.9632	* 2.2695	* 1.8538	* 3.5354 *
	* 2.7210	* 2.5217	* 2.0150	* 2.4162	* 1.9987	* 2.3942	* 1.9463	* 3.5382 *
	* 2.7336	* 2.5243	* 2.0465	* 2.4244	* 2.0620	* 2.4541	* 2.0292	* 3.4959 *
	* 2.6998	* 2.5128	* 2.1025	* 2.4263	* 2.1188	* 2.4456	* 2.0737	* 3.2797 *
9	* 2.5665	* 1.9636	* 2.4997	* 1.9451	* 2.3643	* 1.9820	* 1.7921	* 3.6811 *
	* 2.6019	* 2.0265	* 2.5494	* 1.9733	* 2.3909	* 1.9861	* 1.8184	* 3.4711 *
	* 2.5642	* 2.0363	* 2.5234	* 1.9761	* 2.3795	* 2.0129	* 1.8095	* 3.4090 *
	* 2.5217	* 2.0517	* 2.4687	* 1.9956	* 2.3733	* 2.1264	* 1.9170	* 3.4170 *
	* 2.5243	* 2.0832	* 2.4675	* 2.0111	* 2.3835	* 2.1865	* 2.0077	* 3.3896 *
	* 2.5128	* 2.1107	* 2.4617	* 2.0367	* 2.3903	* 2.1903	* 2.0599	* 3.1939 *
10	* 2.2721	* 2.5062	* 2.1750	* 2.2230	* 1.8479	* 2.0159	* 1.7642	* 3.8016 *
	* 2.1971	* 2.5546	* 2.2501	* 2.2126	* 1.8534	* 2.0211	* 1.7961	* 3.6252 *
	* 2.0829	* 2.5268	* 2.2694	* 2.1937	* 1.8781	* 2.0516	* 1.8033	* 3.5933 *
	* 2.0150	* 2.4730	* 2.3004	* 2.1844	* 1.9379	* 2.1569	* 1.9135	* 3.6458 *
	* 2.0465	* 2.4715	* 2.3194	* 2.1966	* 1.9648	* 2.2070	* 2.0105	* 3.6201 *
	* 2.1025	* 2.4647	* 2.3244	* 2.2127	* 2.0005	* 2.2173	* 2.0626	* 3.4071 *
11	* 2.5975	* 1.9496	* 2.2300	* 1.8788	* 2.1026	* 1.8313	* 1.7788	* 4.0315 *
	* 2.5020	* 1.9779	* 2.2192	* 1.9253	* 2.0882	* 1.7863	* 1.7700	* 3.8474 *
	* 2.4511	* 1.9803	* 2.1995	* 1.9435	* 2.0900	* 1.7858	* 1.7885	* 3.8207 *
	* 2.4162	* 1.9996	* 2.1888	* 1.9492	* 2.1077	* 1.9022	* 1.9015	* 3.8831 *
	* 2.4244	* 2.0142	* 2.1998	* 1.9709	* 2.1256	* 1.9967	* 1.9968	* 3.8556 *
	* 2.4263	* 2.0388	* 2.2149	* 2.0082	* 2.1347	* 2.0701	* 2.0847	* 3.6143 *
12	* 2.0032	* 2.3662	* 1.8495	* 2.1032	* 2.0945	* 1.8394	* 3.0513 *	
	* 1.9943	* 2.3930	* 1.8553	* 2.0899	* 2.1179	* 1.8362	* 2.8700 *	
	* 1.9632	* 2.3828	* 1.8796	* 2.0915	* 2.1474	* 1.8407	* 2.8449 *	
	* 1.9987	* 2.3753	* 1.9396	* 2.1086	* 2.2409	* 1.9243	* 2.9139 *	
	* 2.0620	* 2.3846	* 1.9657	* 2.1261	* 2.2854	* 2.0133	* 2.9358 *	
	* 2.1188	* 2.3905	* 2.0008	* 2.1348	* 2.2867	* 2.0641	* 2.8204 *	
13	* 2.2246	* 1.9834	* 2.0182	* 1.8331	* 1.8408	* 3.0987	* 5.3515 *	
	* 2.2405	* 1.9874	* 2.0234	* 1.7881	* 1.8380	* 2.9836	* 5.1299 *	
	* 2.2695	* 2.0141	* 2.0536	* 1.7873	* 1.8422	* 2.9611	* 5.0470 *	
	* 2.3942	* 2.1271	* 2.1583	* 1.9029	* 1.9250	* 2.9939	* 4.9321 *	
	* 2.4541	* 2.1869	* 2.2078	* 1.9969	* 2.0135	* 2.9819	* 4.7455 *	
	* 2.4456	* 2.1905	* 2.2176	* 2.0700	* 2.0645	* 2.8593	* 4.2951 *	
14	* 1.8428	* 1.7938	* 1.7659	* 1.7810	* 3.0526	* 5.4557 *		
	* 1.8697	* 1.8198	* 1.7980	* 1.7720	* 2.8716	* 5.2194 *		
	* 1.8538	* 1.8107	* 1.8048	* 1.7901	* 2.8461	* 5.1341 *		
	* 1.9463	* 1.9175	* 1.9141	* 1.9023	* 2.9153	* 5.0113 *		
	* 2.0292	* 2.0078	* 2.0106	* 1.9970	* 2.9355	* 4.8162 *		
	* 2.0737	* 2.0597	* 2.0624	* 2.0845	* 2.8188	* 4.3535 *		
15	* 3.8137	* 3.6821	* 3.8057	* 4.0364	* 4 EFPD	118 % POWER		
	* 3.5992	* 3.4721	* 3.6292	* 3.8521	* 75 EFPD	118 % POWER		
	* 3.5354	* 3.4098	* 3.5967	* 3.8246	* 125 EFPD	118 % POWER		
	* 3.5382	* 3.4172	* 3.6472	* 3.8852	* 250 EFPD	118 % POWER		
	* 3.4959	* 3.3896	* 3.6206	* 3.8566	* 350 EFPD	118 % POWER		
	* 3.2797	* 3.1936	* 3.4071	* 3.6146	* 500 EFPD	118 % POWER		

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 230 of 312

TABLE A-2 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 2.5678 *	* 2.5991 *	* 2.3046 *	* 2.6335 *	* 2.0335 *	* 2.2531 *	* 1.8800 *	* 3.8906 *
	* 2.6165 *	* 2.5568 *	* 2.1688 *	* 2.4638 *	* 1.9690 *	* 2.2102 *	* 1.8565 *	* 3.5476 *
	* 2.6272 *	* 2.5033 *	* 2.0462 *	* 2.4027 *	* 1.9346 *	* 2.2397 *	* 1.8493 *	* 3.4855 *
	* 2.6685 *	* 2.4741 *	* 1.9993 *	* 2.3944 *	* 1.9908 *	* 2.4150 *	* 1.9908 *	* 3.5766 *
	* 2.7131 *	* 2.5115 *	* 2.0506 *	* 2.4244 *	* 2.0774 *	* 2.5099 *	* 2.1089 *	* 3.5827 *
	* 2.7833 *	* 2.5829 *	* 2.1873 *	* 2.5060 *	* 2.2169 *	* 2.5901 *	* 2.2406 *	* 3.4680 *
9	* 2.5991 *	* 1.9986 *	* 2.5317 *	* 1.9890 *	* 2.3936 *	* 2.0194 *	* 1.8359 *	* 3.7460 *
	* 2.5568 *	* 2.0023 *	* 2.5055 *	* 1.9607 *	* 2.3588 *	* 1.9718 *	* 1.8137 *	* 3.4161 *
	* 2.5033 *	* 1.9979 *	* 2.4620 *	* 1.9537 *	* 2.3452 *	* 1.9988 *	* 1.8120 *	* 3.3587 *
	* 2.4741 *	* 2.0387 *	* 2.4323 *	* 1.9886 *	* 2.3606 *	* 2.1566 *	* 1.9674 *	* 3.4520 *
	* 2.5115 *	* 2.0913 *	* 2.4584 *	* 2.0301 *	* 2.3965 *	* 2.2495 *	* 2.0940 *	* 3.4753 *
	* 2.5829 *	* 2.1975 *	* 2.5355 *	* 2.1467 *	* 2.4783 *	* 2.3378 *	* 2.2273 *	* 3.3812 *
10	* 2.3046 *	* 2.5379 *	* 2.2177 *	* 2.2628 *	* 1.8930 *	* 2.0619 *	* 1.8115 *	* 3.8825 *
	* 2.1688 *	* 2.5105 *	* 2.2301 *	* 2.1912 *	* 1.8499 *	* 2.0127 *	* 1.7985 *	* 3.5970 *
	* 2.0462 *	* 2.4654 *	* 2.2390 *	* 2.1626 *	* 1.8739 *	* 2.0440 *	* 1.8098 *	* 3.5663 *
	* 1.9993 *	* 2.4364 *	* 2.2912 *	* 2.1739 *	* 1.9608 *	* 2.1901 *	* 1.9692 *	* 3.6792 *
	* 2.0506 *	* 2.4616 *	* 2.3330 *	* 2.2116 *	* 2.0185 *	* 2.2691 *	* 2.1028 *	* 3.7045 *
	* 2.1873 *	* 2.5374 *	* 2.4202 *	* 2.3207 *	* 2.1455 *	* 2.3638 *	* 2.2328 *	* 3.5842 *
11	* 2.6335 *	* 1.9942 *	* 2.2706 *	* 1.9333 *	* 2.1609 *	* 1.8842 *	* 1.8382 *	* 4.1309 *
	* 2.4638 *	* 1.9655 *	* 2.1984 *	* 1.9224 *	* 2.0862 *	* 1.7925 *	* 1.7815 *	* 3.8275 *
	* 2.4027 *	* 1.9584 *	* 2.1690 *	* 1.9265 *	* 2.0787 *	* 1.7933 *	* 1.8077 *	* 3.8065 *
	* 2.3943 *	* 1.9928 *	* 2.1783 *	* 1.9703 *	* 2.1274 *	* 1.9514 *	* 1.9699 *	* 3.9559 *
	* 2.4244 *	* 2.0333 *	* 2.2148 *	* 2.0245 *	* 2.1767 *	* 2.0814 *	* 2.1035 *	* 3.9869 *
	* 2.5060 *	* 2.1487 *	* 2.3228 *	* 2.1571 *	* 2.2786 *	* 2.2442 *	* 2.2585 *	* 3.8255 *
12	* 2.0335 *	* 2.3960 *	* 1.8949 *	* 2.1615 *	* 2.1660 *	* 1.9076 *	* 3.1150 *	
	* 1.9690 *	* 2.3614 *	* 1.8521 *	* 2.0881 *	* 2.1324 *	* 1.8574 *	* 2.8516 *	
	* 1.9346 *	* 2.3487 *	* 1.8757 *	* 2.0803 *	* 2.1605 *	* 1.8636 *	* 2.8302 *	
	* 1.9908 *	* 2.3629 *	* 1.9627 *	* 2.1284 *	* 2.2938 *	* 1.9988 *	* 2.9639 *	
	* 2.0774 *	* 2.3988 *	* 2.0197 *	* 2.1771 *	* 2.3732 *	* 2.1281 *	* 3.0321 *	
	* 2.2169 *	* 2.4795 *	* 2.1461 *	* 2.2788 *	* 2.4677 *	* 2.2365 *	* 2.9881 *	
13	* 2.2531 *	* 2.0210 *	* 2.0646 *	* 1.8863 *	* 1.9091 *	* 3.2052 *	* 5.5717 *	
	* 2.2102 *	* 1.9732 *	* 2.0153 *	* 1.7945 *	* 1.8594 *	* 3.0036 *	* 5.1951 *	
	* 2.2397 *	* 2.0000 *	* 2.0463 *	* 1.7950 *	* 1.8652 *	* 2.9828 *	* 5.1111 *	
	* 2.4150 *	* 2.1574 *	* 2.1915 *	* 1.9522 *	* 1.9995 *	* 3.0767 *	* 5.0956 *	
	* 2.5099 *	* 2.2499 *	* 2.2697 *	* 2.0816 *	* 2.1283 *	* 3.1082 *	* 4.9661 *	
	* 2.5901 *	* 2.3380 *	* 2.3637 *	* 2.2439 *	* 2.2368 *	* 3.0437 *	* 4.5278 *	
14	* 1.8800 *	* 1.8378 *	* 1.8135 *	* 1.8407 *	* 3.1174 *	* 5.6792 *		
	* 1.8565 *	* 1.8153 *	* 1.8005 *	* 1.7838 *	* 2.8539 *	* 5.2843 *		
	* 1.8493 *	* 1.8134 *	* 1.8114 *	* 1.8096 *	* 2.8321 *	* 5.1978 *		
	* 1.9908 *	* 1.9679 *	* 1.9698 *	* 1.9708 *	* 2.9650 *	* 5.1747 *		
	* 2.1089 *	* 2.0941 *	* 2.1029 *	* 2.1036 *	* 3.0318 *	* 5.0381 *		
	* 2.2406 *	* 2.2271 *	* 2.2325 *	* 2.2583 *	* 2.9867 *	* 4.5897 *		
15	* 3.8906 *	* 3.7475 *	* 3.8877 *	* 4.1371 *	* 4 EFPD	* 118 % POWER		
	* 3.5476 *	* 3.4174 *	* 3.6017 *	* 3.8330 *	* 75 EFPD	* 118 % POWER		
	* 3.4855 *	* 3.3597 *	* 3.5696 *	* 3.8110 *	* 125 EFPD	* 118 % POWER		
	* 3.5766 *	* 3.4523 *	* 3.6809 *	* 3.9583 *	* 250 EFPD	* 118 % POWER		
	* 3.5827 *	* 3.4753 *	* 3.7049 *	* 3.9879 *	* 350 EFPD	* 118 % POWER		
	* 3.4680 *	* 3.3810 *	* 3.5841 *	* 3.8259 *	* 500 EFPD	* 118 % POWER		

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355

Appendix A, Rev. 0

Page 231 of 312

TABLE A-2 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 2.4675	* 2.4989	* 2.1985	* 2.5191	* 1.9422	* 2.1627	* 1.7936	* 3.7774 *
	* 2.5221	* 2.4623	* 2.0742	* 2.3623	* 1.8806	* 2.1287	* 1.7747	* 3.4682 *
	* 2.5275	* 2.4048	* 1.9482	* 2.3001	* 1.8472	* 2.1572	* 1.7655	* 3.4079 *
	* 2.5626	* 2.3713	* 1.8998	* 2.2960	* 1.9050	* 2.3407	* 1.9097	* 3.5119 *
	* 2.6002	* 2.4006	* 1.9559	* 2.3264	* 1.9927	* 2.4303	* 2.0224	* 3.5178 *
	* 2.6350	* 2.4528	* 2.0591	* 2.3777	* 2.0890	* 2.4576	* 2.1080	* 3.3411 *
9	* 2.4989	* 1.9045	* 2.4255	* 1.8941	* 2.3103	* 1.9342	* 1.7542	* 3.6458 *
	* 2.4623	* 1.9126	* 2.4089	* 1.8684	* 2.2731	* 1.8926	* 1.7330	* 3.3446 *
	* 2.4048	* 1.9043	* 2.3627	* 1.8617	* 2.2502	* 1.9192	* 1.7288	* 3.2864 *
	* 2.3713	* 1.9338	* 2.3294	* 1.9020	* 2.2792	* 2.0841	* 1.8863	* 3.3948 *
	* 2.4006	* 1.9894	* 2.3551	* 1.9441	* 2.3180	* 2.1724	* 2.0070	* 3.4147 *
	* 2.4528	* 2.0670	* 2.4078	* 2.0183	* 2.3703	* 2.2141	* 2.1005	* 3.2553 *
10	* 2.1985	* 2.4319	* 2.1260	* 2.1706	* 1.8203	* 1.9812	* 1.7312	* 3.7802 *
	* 2.0742	* 2.4140	* 2.1401	* 2.1014	* 1.7804	* 1.9383	* 1.7206	* 3.5106 *
	* 1.9482	* 2.3660	* 2.1465	* 2.0741	* 1.8015	* 1.9682	* 1.7282	* 3.4824 *
	* 1.8998	* 2.3335	* 2.1989	* 2.0940	* 1.8804	* 2.1197	* 1.8875	* 3.6313 *
	* 1.9559	* 2.3586	* 2.2439	* 2.1355	* 1.9318	* 2.1947	* 2.0145	* 3.6563 *
	* 2.0591	* 2.4100	* 2.2983	* 2.1995	* 2.0184	* 2.2421	* 2.1134	* 3.4845 *
11	* 2.5191	* 1.8989	* 2.1779	* 1.8603	* 2.0880	* 1.8077	* 1.7639	* 4.0400 *
	* 2.3623	* 1.8731	* 2.1080	* 1.8475	* 2.0228	* 1.7227	* 1.7088	* 3.7532 *
	* 2.3001	* 1.8658	* 2.0800	* 1.8511	* 2.0143	* 1.7207	* 1.7305	* 3.7307 *
	* 2.2960	* 1.9061	* 2.0984	* 1.8916	* 2.0580	* 1.8717	* 1.8853	* 3.8920 *
	* 2.3264	* 1.9469	* 2.1387	* 1.9397	* 2.1021	* 1.9951	* 2.0122	* 3.9170 *
	* 2.3777	* 2.0200	* 2.2015	* 2.0297	* 2.1611	* 2.1207	* 2.1526	* 3.7204 *
12	* 1.9422	* 2.3124	* 1.8223	* 2.0886	* 2.0911	* 1.8326	* 3.0634 *	
	* 1.8806	* 2.2755	* 1.7825	* 2.0247	* 2.0679	* 1.7865	* 2.8135 *	
	* 1.8472	* 2.2532	* 1.8033	* 2.0158	* 2.0955	* 1.7907	* 2.7887 *	
	* 1.9050	* 2.2812	* 1.8823	* 2.0590	* 2.2193	* 1.9140	* 2.9126 *	
	* 1.9927	* 2.3191	* 1.9329	* 2.1024	* 2.2918	* 2.0360	* 2.9756 *	
	* 2.0890	* 2.3705	* 2.0188	* 2.1612	* 2.3456	* 2.1426	* 2.9154 *	
13	* 2.1627	* 1.9359	* 1.9840	* 1.8098	* 1.8341	* 3.1240	* 5.4376 *	
	* 2.1287	* 1.8941	* 1.9411	* 1.7248	* 1.7885	* 2.9392	* 5.0828 *	
	* 2.1572	* 1.9205	* 1.9706	* 1.7224	* 1.7923	* 2.9187	* 4.9958 *	
	* 2.3407	* 2.0849	* 2.1213	* 1.8724	* 1.9146	* 3.0007	* 4.9605 *	
	* 2.4303	* 2.1729	* 2.1953	* 1.9952	* 2.0361	* 3.0277	* 4.8325 *	
	* 2.4576	* 2.2143	* 2.2420	* 2.1204	* 2.1429	* 2.9630	* 4.4603 *	
14	* 1.7936	* 1.7562	* 1.7333	* 1.7664	* 3.0651	* 5.5527 *		
	* 1.7747	* 1.7346	* 1.7227	* 1.7111	* 2.8155	* 5.1802 *		
	* 1.7655	* 1.7302	* 1.7299	* 1.7324	* 2.7902	* 5.0897 *		
	* 1.9097	* 1.8868	* 1.8881	* 1.8862	* 2.9138	* 5.0469 *		
	* 2.0224	* 2.0071	* 2.0145	* 2.0122	* 2.9756	* 4.9107 *		
	* 2.1080	* 2.1004	* 2.1131	* 2.1523	* 2.9136	* 4.5269 *		
15	* 3.7774	* 3.6472	* 3.7852	* 4.0459 *	4 EFPD	118 % POWER		
	* 3.4682	* 3.3459	* 3.5154	* 3.7586 *	75 EFPD	118 % POWER		
	* 3.4079	* 3.2875	* 3.4863	* 3.7353 *	125 EFPD	118 % POWER		
	* 3.5119	* 3.3951	* 3.6328	* 3.8944 *	250 EFPD	118 % POWER		
	* 3.5178	* 3.4147	* 3.6567	* 3.9182 *	350 EFPD	118 % POWER		
	* 3.3411	* 3.2551	* 3.4844	* 3.7210 *	500 EFPD	118 % POWER		

CNEI-0400-355
Appendix A, Rev. 0
Page 232 of 312

	H	G	F	E	D	C	B	A
8	2.3405	2.3689	2.0800	2.3940	1.8389	2.0482	1.6943	3.5968
	2.3775	2.3193	1.9519	2.2339	1.7732	1.9995	1.6618	3.2621
	2.3795	2.2626	1.8331	2.1730	1.7385	2.0255	1.6529	3.2020
	2.4194	2.2377	1.7924	2.1724	1.8013	2.2048	1.7970	3.3069
	2.4711	2.2798	1.8568	2.2114	1.8950	2.3108	1.9237	3.3423
	2.4958	2.3233	1.9543	2.2595	1.9875	2.3486	2.0069	3.1983
9	2.3689	1.8023	2.3016	1.7953	2.1922	1.8325	1.6568	3.4713
	2.3193	1.7990	2.2724	1.7624	2.1459	1.7779	1.6229	3.1449
	2.2626	1.7888	2.2250	1.7540	2.1284	1.8020	1.6180	3.0885
	2.2377	1.8229	2.2002	1.7944	2.1602	1.9651	1.7760	3.1983
	2.2798	1.8876	2.2375	1.8473	2.2098	2.0688	1.9107	3.2480
	2.3233	1.9579	2.2850	1.9211	2.2615	2.1146	1.9996	3.1261
10	2.0800	2.3076	2.0198	2.0599	1.7150	1.8761	1.6341	3.5852
	1.9519	2.2772	2.0234	1.9831	1.6628	1.8200	1.6088	3.2885
	1.8331	2.2280	2.0273	1.9546	1.6816	1.8474	1.6159	3.2599
	1.7924	2.2040	2.0826	1.9789	1.7698	2.0005	1.7766	3.4131
	1.8568	2.2408	2.1375	2.0330	1.8407	2.0929	1.9178	3.4779
	1.9543	2.2871	2.1872	2.0991	1.9204	2.1440	2.0108	3.3408
11	2.3940	1.7998	2.0668	1.7567	1.9773	1.7026	1.6586	3.8297
	2.2339	1.7669	1.9898	1.7308	1.8944	1.6080	1.5927	3.5131
	2.1730	1.7579	1.9605	1.7319	1.8850	1.6068	1.6130	3.4896
	2.1724	1.7983	1.9832	1.7795	1.9401	1.7628	1.7697	3.6554
	2.2114	1.8499	2.0359	1.8493	2.0067	1.9032	1.9135	3.7226
	2.2595	1.9228	2.1009	1.9313	2.0642	2.0193	2.0462	3.5719
12	1.8389	2.1945	1.7169	1.9778	1.9839	1.7296	2.8960	
	1.7732	2.1483	1.6648	1.8961	1.9410	1.6657	2.6223	
	1.7385	2.1311	1.6833	1.8863	1.9654	1.6698	2.5990	
	1.8013	2.1621	1.7714	1.9408	2.0920	1.7962	2.7346	
	1.8950	2.2107	1.8416	2.0069	2.1884	1.9385	2.8329	
	1.9875	2.2615	1.9208	2.0642	2.2400	2.0363	2.7926	
13	2.0482	1.8341	1.8789	1.7046	1.7310	2.9639	5.1610	
	1.9995	1.7794	1.8227	1.6098	1.6675	2.7447	4.7782	
	2.0255	1.8033	1.8497	1.6084	1.6712	2.7216	4.6910	
	2.2048	1.9659	2.0020	1.7634	1.7968	2.8099	4.6733	
	2.3108	2.0692	2.0935	1.9032	1.9385	2.8771	4.5934	
	2.3486	2.1148	2.1439	2.0190	2.0365	2.8283	4.2367	
14	1.6943	1.6588	1.6361	1.6611	2.8978	5.2755		
	1.6618	1.6244	1.6107	1.5948	2.6239	4.8745		
	1.6529	1.6193	1.6175	1.6147	2.6002	4.7836		
	1.7970	1.7765	1.7771	1.7704	2.7351	4.7607		
	1.9237	1.9107	1.9178	1.9135	2.8336	4.6719		
	2.0069	1.9994	2.0106	2.0459	2.7906	4.3029		
15	3.5968	3.4727	3.5905	3.8360	4 EFPD	118 %	POWER	
	3.2621	3.1462	3.2931	3.5185	75 EFPD	118 %	POWER	

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 233 of 312

TABLE A-2 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 2.2118	* 2.2403	* 1.9676	* 2.2660	* 1.7313	* 1.9251	* 1.5906	* 3.3954
	* 2.2543	* 2.2008	* 1.8507	* 2.1183	* 1.6727	* 1.8826	* 1.5614	* 3.0780
	* 2.2528	* 2.1430	* 1.7337	* 2.0569	* 1.6378	* 1.9056	* 1.5497	* 3.0163
	* 2.2688	* 2.0963	* 1.6743	* 2.0363	* 1.6825	* 2.0616	* 1.6738	* 3.0921
	* 2.3090	* 2.1272	* 1.7272	* 2.0644	* 1.7645	* 2.1559	* 1.7891	* 3.1171
	* 2.3454	* 2.1816	* 1.8349	* 2.1237	* 1.8674	* 2.2049	* 1.8839	* 2.9942
9	* 2.2403	* 1.7016	* 2.1762	* 1.6925	* 2.0667	* 1.7181	* 1.5525	* 3.2718
	* 2.2008	* 1.7032	* 2.1553	* 1.6643	* 2.0282	* 1.6698	* 1.5221	* 2.9611
	* 2.1430	* 1.6902	* 2.1070	* 1.6544	* 2.0114	* 1.6914	* 1.5147	* 2.9024
	* 2.0963	* 1.7024	* 2.0623	* 1.6757	* 2.0230	* 1.8339	* 1.6532	* 2.9818
	* 2.1272	* 1.7556	* 2.0888	* 1.7170	* 2.0630	* 1.9273	* 1.7763	* 3.0190
	* 2.1816	* 1.8371	* 2.1472	* 1.8019	* 2.1265	* 1.9847	* 1.8774	* 2.9128
10	* 1.9676	* 2.1821	* 1.9048	* 1.9400	* 1.6077	* 1.7585	* 1.5302	* 3.3726
	* 1.8507	* 2.1600	* 1.9144	* 1.8717	* 1.5600	* 1.7085	* 1.5066	* 3.0943
	* 1.7337	* 2.1100	* 1.9162	* 1.8425	* 1.5760	* 1.7331	* 1.5113	* 3.0629
	* 1.6743	* 2.0659	* 1.9521	* 1.8500	* 1.6505	* 1.8697	* 1.6533	* 3.1854
	* 1.7272	* 2.0919	* 1.9964	* 1.8925	* 1.7099	* 1.9518	* 1.7825	* 3.2307
	* 1.8349	* 2.1488	* 2.0567	* 1.9710	* 1.8036	* 2.0144	* 1.8882	* 3.1175
11	* 2.2660	* 1.6969	* 1.9468	* 1.6463	* 1.8536	* 1.5932	* 1.5509	* 3.5922
	* 2.1183	* 1.6687	* 1.8782	* 1.6292	* 1.7797	* 1.5039	* 1.4881	* 3.2951
	* 2.0569	* 1.6584	* 1.8482	* 1.6280	* 1.7712	* 1.5014	* 1.5052	* 3.2682
	* 2.0363	* 1.6795	* 1.8542	* 1.6587	* 1.8122	* 1.6403	* 1.6450	* 3.4031
	* 2.0644	* 1.7195	* 1.8953	* 1.7168	* 1.8682	* 1.7679	* 1.7765	* 3.4568
	* 2.1237	* 1.8034	* 1.9728	* 1.8136	* 1.9395	* 1.8977	* 1.9199	* 3.3275
12	* 1.7313	* 2.0690	* 1.6096	* 1.8541	* 1.8586	* 1.6176	* 2.7093	
	* 1.6727	* 2.0305	* 1.5620	* 1.7814	* 1.8216	* 1.5565	* 2.4523	
	* 1.6378	* 2.0141	* 1.5776	* 1.7725	* 1.8434	* 1.5580	* 2.4268	
	* 1.6825	* 2.0248	* 1.6521	* 1.8129	* 1.9544	* 1.6702	* 2.5423	
	* 1.7645	* 2.0638	* 1.7108	* 1.8684	* 2.0397	* 1.7994	* 2.6271	
	* 1.8674	* 2.1265	* 1.8039	* 1.9394	* 2.1072	* 1.9114	* 2.6031	
13	* 1.9251	* 1.7198	* 1.7615	* 1.5952	* 1.6191	* 2.7719	* 4.8485	
	* 1.8826	* 1.6713	* 1.7112	* 1.5058	* 1.5583	* 2.5701	* 4.4909	
	* 1.9056	* 1.6927	* 1.7355	* 1.5030	* 1.5594	* 2.5451	* 4.3987	
	* 2.0616	* 1.8346	* 1.8712	* 1.6409	* 1.6707	* 2.6168	* 4.3634	
	* 2.1559	* 1.9277	* 1.9523	* 1.7679	* 1.7995	* 2.6723	* 4.2823	
	* 2.2049	* 1.9849	* 2.0143	* 1.8974	* 1.9116	* 2.6431	* 3.9543	
14	* 1.5906	* 1.5545	* 1.5323	* 1.5533	* 2.7112	* 4.9578		
	* 1.5614	* 1.5236	* 1.5086	* 1.4902	* 2.4541	* 4.5829		
	* 1.5497	* 1.5160	* 1.5129	* 1.5069	* 2.4282	* 4.4892		
	* 1.6738	* 1.6536	* 1.6538	* 1.6456	* 2.5432	* 4.4463		
	* 1.7891	* 1.7763	* 1.7825	* 1.7764	* 2.6269	* 4.3564		
	* 1.8839	* 1.8773	* 1.8879	* 1.9196	* 2.6013	* 4.0166		
15	* 3.3954	* 3.2733	* 3.3778	* 3.5984	* 4 EFPD	118 % POWER		
	* 3.0780	* 2.9624	* 3.0989	* 3.3005	* 75 EFPD	118 % POWER		
	* 3.0163	* 2.9035	* 3.0666	* 3.2726	* 125 EFPD	118 % POWER		
	* 3.0921	* 2.9821	* 3.1867	* 3.4053	* 250 EFPD	118 % POWER		
	* 3.1171	* 3.0189	* 3.2310	* 3.4577	* 350 EFPD	118 % POWER		
	* 2.9942	* 2.9126	* 3.1174	* 3.3278	* 500 EFPD	118 % POWER		

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 234 of 312

TABLE A-2 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 2.1088	* 2.1374	* 1.8839	* 2.1637	* 1.6507	* 1.8264	* 1.5118	* 3.2085
	* 2.1638	* 2.1142	* 1.7824	* 2.0332	* 1.6038	* 1.7959	* 1.4917	* 2.9158
	* 2.1601	* 2.0561	* 1.6674	* 1.9712	* 1.5698	* 1.8172	* 1.4784	* 2.8525
	* 2.1390	* 1.9814	* 1.5850	* 1.9269	* 1.5934	* 1.9450	* 1.5805	* 2.8939
	* 2.1603	* 1.9966	* 1.6233	* 1.9403	* 1.6588	* 2.0234	* 1.6807	* 2.8994
	* 2.2016	* 2.0489	* 1.7259	* 1.9953	* 1.7566	* 2.0701	* 1.7710	* 2.7825
9	* 2.1374	* 1.6262	* 2.0765	* 1.6145	* 1.9660	* 1.6276	* 1.4730	* 3.0822
	* 2.1142	* 1.6381	* 2.0695	* 1.5960	* 1.9422	* 1.5907	* 1.4513	* 2.8012
	* 2.0561	* 1.6232	* 2.0212	* 1.5851	* 1.9248	* 1.6100	* 1.4428	* 2.7425
	* 1.9814	* 1.6116	* 1.9517	* 1.5880	* 1.9128	* 1.7293	* 1.5595	* 2.7876
	* 1.9966	* 1.6503	* 1.9617	* 1.6139	* 1.9281	* 1.8085	* 1.6681	* 2.8080
	* 2.0489	* 1.7283	* 2.0167	* 1.6933	* 1.9765	* 1.8632	* 1.7646	* 2.7087
10	* 1.8839	* 2.0821	* 1.8137	* 1.8445	* 1.5263	* 1.6654	* 1.4512	* 3.1777
	* 1.7824	* 2.0741	* 1.8348	* 1.7911	* 1.4884	* 1.6265	* 1.4349	* 2.9283
	* 1.6674	* 2.0241	* 1.8349	* 1.7620	* 1.5025	* 1.6496	* 1.4385	* 2.8959
	* 1.5850	* 1.9552	* 1.8476	* 1.7474	* 1.5615	* 1.7654	* 1.5591	* 2.9673
	* 1.6233	* 1.9642	* 1.8774	* 1.7740	* 1.6054	* 1.8318	* 1.6735	* 2.9920
	* 1.7259	* 2.0182	* 1.9348	* 1.8478	* 1.6933	* 1.8911	* 1.7744	* 2.8795
11	* 2.1637	* 1.6189	* 1.8512	* 1.5625	* 1.7555	* 1.5101	* 1.4681	* 3.3787
	* 2.0332	* 1.6004	* 1.7976	* 1.5590	* 1.6954	* 1.4307	* 1.4135	* 3.1126
	* 1.9712	* 1.5890	* 1.7677	* 1.5566	* 1.6888	* 1.4281	* 1.4294	* 3.0842
	* 1.9269	* 1.5917	* 1.7511	* 1.5681	* 1.7097	* 1.5461	* 1.5497	* 3.1815
	* 1.9403	* 1.6165	* 1.7766	* 1.6103	* 1.7506	* 1.6576	* 1.6652	* 3.2142
	* 1.9953	* 1.6948	* 1.8495	* 1.7026	* 1.8180	* 1.7808	* 1.8013	* 3.0902
12	* 1.6507	* 1.9683	* 1.5282	* 1.7559	* 1.7589	* 1.5316	* 2.5341	*
	* 1.6038	* 1.9445	* 1.4904	* 1.6970	* 1.7331	* 1.4789	* 2.3026	*
	* 1.5698	* 1.9277	* 1.5042	* 1.6900	* 1.7534	* 1.4786	* 2.2765	*
	* 1.5934	* 1.9145	* 1.5630	* 1.7103	* 1.8436	* 1.5736	* 2.3629	*
	* 1.6588	* 1.9299	* 1.6063	* 1.7508	* 1.9134	* 1.6863	* 2.4284	*
	* 1.7566	* 1.9772	* 1.6936	* 1.8179	* 1.9771	* 1.7920	* 2.4014	*
13	* 1.8264	* 1.6293	* 1.6683	* 1.5121	* 1.5331	* 2.6049	* 4.5576	*
	* 1.7959	* 1.5922	* 1.6293	* 1.4326	* 1.4807	* 2.4276	* 4.2385	*
	* 1.8172	* 1.6113	* 1.6520	* 1.4297	* 1.4800	* 2.4014	* 4.1470	*
	* 1.9450	* 1.7300	* 1.7669	* 1.5467	* 1.5741	* 2.4469	* 4.0772	*
	* 2.0234	* 1.8089	* 1.8324	* 1.6576	* 1.6863	* 2.4830	* 3.9804	*
	* 2.0701	* 1.8634	* 1.8911	* 1.7805	* 1.7922	* 2.4516	* 3.6683	*
14	* 1.5118	* 1.4750	* 1.4533	* 1.4705	* 2.5363	* 4.6585	*	*
	* 1.4917	* 1.4529	* 1.4369	* 1.4157	* 2.3047	* 4.3241	*	*
	* 1.4784	* 1.4441	* 1.4402	* 1.4311	* 2.2781	* 4.2311	*	*
	* 1.5805	* 1.5600	* 1.5596	* 1.5503	* 2.3640	* 4.1529	*	*
	* 1.6807	* 1.6681	* 1.6735	* 1.6651	* 2.4278	* 4.0469	*	*
	* 1.7710	* 1.7644	* 1.7741	* 1.8010	* 2.3999	* 3.7244	*	*
15	* 3.2085	* 3.0838	* 3.1828	* 3.3848	* 4 EFPD	118 % POWER		
	* 2.9158	* 2.8026	* 2.9328	* 3.1180	* 75 EFPD	118 % POWER		
	* 2.8525	* 2.7436	* 2.8996	* 3.0885	* 125 EFPD	118 % POWER		
	* 2.8939	* 2.7880	* 2.9687	* 3.1835	* 250 EFPD	118 % POWER		
	* 2.8994	* 2.8080	* 2.9923	* 3.2150	* 350 EFPD	118 % POWER		
	* 2.7825	* 2.7085	* 2.8793	* 3.0904	* 500 EFPD	118 % POWER		

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 235 of 312

TABLE A-2 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.9771	* 2.0107	* 1.7644	* 2.0391	* 1.5372	* 1.7077	* 1.4041	* 3.0735
	* 2.0555	* 2.0160	* 1.6893	* 1.9378	* 1.5141	* 1.7000	* 1.4007	* 2.8247
	* 2.0536	* 1.9615	* 1.5794	* 1.8808	* 1.4822	* 1.7225	* 1.3881	* 2.7656
	* 2.0099	* 1.8625	* 1.4748	* 1.8130	* 1.4838	* 1.8257	* 1.4665	* 2.7685
	* 2.0183	* 1.8637	* 1.4988	* 1.8103	* 1.5333	* 1.8868	* 1.5497	* 2.7536
	* 2.0522	* 1.9128	* 1.5946	* 1.8628	* 1.6228	* 1.9285	* 1.6330	* 2.6367
9	* 2.0107	* 1.5193	* 1.9537	* 1.5075	* 1.8473	* 1.5160	* 1.3667	* 2.9566
	* 2.0160	* 1.5487	* 1.9728	* 1.5065	* 1.8482	* 1.5000	* 1.3614	* 2.7163
	* 1.9615	* 1.5352	* 1.9287	* 1.4973	* 1.8336	* 1.5202	* 1.3530	* 2.6608
	* 1.8625	* 1.4969	* 1.8354	* 1.4789	* 1.8013	* 1.6164	* 1.4460	* 2.6719
	* 1.8637	* 1.5215	* 1.8321	* 1.4877	* 1.8091	* 1.6801	* 1.5370	* 2.6710
	* 1.9128	* 1.5958	* 1.8836	* 1.5605	* 1.8618	* 1.7306	* 1.6268	* 2.5719
10	* 1.7644	* 1.9594	* 1.6996	* 1.7271	* 1.4183	* 1.5522	* 1.3454	* 3.0370
	* 1.6893	* 1.9774	* 1.7422	* 1.6973	* 1.3987	* 1.5348	* 1.3435	* 2.8280
	* 1.5794	* 1.9316	* 1.7454	* 1.6725	* 1.4128	* 1.5586	* 1.3481	* 2.7973
	* 1.4748	* 1.8388	* 1.7354	* 1.6391	* 1.4510	* 1.6529	* 1.4450	* 2.8497
	* 1.4988	* 1.8349	* 1.7521	* 1.6496	* 1.4769	* 1.7053	* 1.5410	* 2.8576
	* 1.5946	* 1.8849	* 1.8053	* 1.7181	* 1.5590	* 1.7595	* 1.6341	* 2.7480
11	* 2.0391	* 1.5118	* 1.7337	* 1.4506	* 1.6368	* 1.3993	* 1.3619	* 3.2409
	* 1.9378	* 1.5108	* 1.7035	* 1.4651	* 1.6024	* 1.3400	* 1.3239	* 3.0180
	* 1.8808	* 1.5011	* 1.6779	* 1.4684	* 1.5990	* 1.3381	* 1.3379	* 2.9917
	* 1.8130	* 1.4825	* 1.6430	* 1.4588	* 1.6017	* 1.4333	* 1.4341	* 3.0503
	* 1.8103	* 1.4901	* 1.6521	* 1.4827	* 1.6247	* 1.5246	* 1.5298	* 3.0575
	* 1.8628	* 1.5618	* 1.7197	* 1.5671	* 1.6882	* 1.6413	* 1.6577	* 2.9347
12	* 1.5372	* 1.8495	* 1.4202	* 1.6372	* 1.6351	* 1.4204	* 2.4240	*
	* 1.5141	* 1.8506	* 1.4006	* 1.6040	* 1.6311	* 1.3855	* 2.2235	*
	* 1.4822	* 1.8363	* 1.4144	* 1.6002	* 1.6528	* 1.3856	* 2.1980	*
	* 1.4838	* 1.8029	* 1.4525	* 1.6022	* 1.7210	* 1.4561	* 2.2551	*
	* 1.5333	* 1.8098	* 1.4777	* 1.6248	* 1.7686	* 1.5450	* 2.2965	*
	* 1.6228	* 1.8624	* 1.5593	* 1.6881	* 1.8288	* 1.6452	* 2.2754	*
13	* 1.7077	* 1.5176	* 1.5552	* 1.4013	* 1.4218	* 2.4686	* 4.3767	*
	* 1.7000	* 1.5015	* 1.5376	* 1.3419	* 1.3872	* 2.3213	* 4.1127	*
	* 1.7225	* 1.5215	* 1.5610	* 1.3396	* 1.3869	* 2.2972	* 4.0286	*
	* 1.8257	* 1.6171	* 1.6543	* 1.4339	* 1.4566	* 2.3137	* 3.9093	*
	* 1.8868	* 1.6805	* 1.7059	* 1.5245	* 1.5450	* 2.3236	* 3.7817	*
	* 1.9285	* 1.7308	* 1.7595	* 1.6410	* 1.6453	* 2.2973	* 3.4825	*
14	* 1.4041	* 1.3687	* 1.3475	* 1.3642	* 2.4258	* 4.4830	*	*
	* 1.4007	* 1.3630	* 1.3456	* 1.3260	* 2.2252	* 4.2041	*	*
	* 1.3881	* 1.3544	* 1.3497	* 1.3396	* 2.1992	* 4.1184	*	*
	* 1.4665	* 1.4464	* 1.4455	* 1.4347	* 2.2553	* 3.9884	*	*
	* 1.5497	* 1.5370	* 1.5409	* 1.5297	* 2.2967	* 3.8542	*	*
	* 1.6330	* 1.6267	* 1.6338	* 1.6573	* 2.2736	* 3.5424	*	*
15	* 3.0735	* 2.9582	* 3.0421	* 3.2470	* 4 EFPD	118 % POWER		
	* 2.8247	* 2.7177	* 2.8326	* 3.0235	* 75 EFPD	118 % POWER		
	* 2.7656	* 2.6618	* 2.8010	* 2.9962	* 125 EFPD	118 % POWER		
	* 2.7685	* 2.6723	* 2.8510	* 3.0524	* 250 EFPD	118 % POWER		
	* 2.7536	* 2.6710	* 2.8582	* 3.0584	* 350 EFPD	118 % POWER		
	* 2.6367	* 2.5717	* 2.7478	* 2.9350	* 500 EFPD	118 % POWER		

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 236 of 312

TABLE A-2 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.8609 *	* 1.8974 *	* 1.6673 *	* 1.9299 *	* 1.4527 *	* 1.6197 *	* 1.3306 *	* 2.9242 *
	* 1.9853 *	* 1.9530 *	* 1.6362 *	* 1.8779 *	* 1.4615 *	* 1.6439 *	* 1.3527 *	* 2.7500 *
	* 1.9883 *	* 1.9045 *	* 1.5335 *	* 1.8261 *	* 1.4348 *	* 1.6696 *	* 1.3432 *	* 2.6977 *
	* 1.9115 *	* 1.7738 *	* 1.4004 *	* 1.7265 *	* 1.4076 *	* 1.7431 *	* 1.3956 *	* 2.6556 *
	* 1.8906 *	* 1.7473 *	* 1.4008 *	* 1.6992 *	* 1.4350 *	* 1.7717 *	* 1.4491 *	* 2.5962 *
	* 1.9052 *	* 1.7791 *	* 1.4794 *	* 1.7345 *	* 1.5083 *	* 1.7983 *	* 1.5172 *	* 2.4656 *
9	* 1.8974 *	* 1.4321 *	* 1.8449 *	* 1.4207 *	* 1.7500 *	* 1.4341 *	* 1.2932 *	* 2.8142 *
	* 1.9530 *	* 1.4967 *	* 1.9100 *	* 1.4538 *	* 1.7897 *	* 1.4469 *	* 1.3130 *	* 2.6430 *
	* 1.9045 *	* 1.4868 *	* 1.8725 *	* 1.4480 *	* 1.7771 *	* 1.4698 *	* 1.3073 *	* 2.5940 *
	* 1.7738 *	* 1.4207 *	* 1.7485 *	* 1.4042 *	* 1.7142 *	* 1.5393 *	* 1.3744 *	* 2.5619 *
	* 1.7473 *	* 1.4210 *	* 1.7192 *	* 1.3933 *	* 1.6979 *	* 1.5737 *	* 1.4356 *	* 2.5167 *
	* 1.7791 *	* 1.4789 *	* 1.7531 *	* 1.4475 *	* 1.7312 *	* 1.6104 *	* 1.5109 *	* 2.4036 *
10	* 1.6673 *	* 1.8506 *	* 1.5997 *	* 1.6255 *	* 1.3425 *	* 1.4683 *	* 1.2724 *	* 2.8967 *
	* 1.6362 *	* 1.9146 *	* 1.6815 *	* 1.6365 *	* 1.3505 *	* 1.4808 *	* 1.2949 *	* 2.7497 *
	* 1.5335 *	* 1.8753 *	* 1.6888 *	* 1.6164 *	* 1.3675 *	* 1.5074 *	* 1.3022 *	* 2.7247 *
	* 1.4004 *	* 1.7518 *	* 1.6504 *	* 1.5573 *	* 1.3849 *	* 1.5772 *	* 1.3732 *	* 2.7312 *
	* 1.4008 *	* 1.7216 *	* 1.6424 *	* 1.5465 *	* 1.3812 *	* 1.5985 *	* 1.4389 *	* 2.6901 *
	* 1.4794 *	* 1.7544 *	* 1.6801 *	* 1.5962 *	* 1.4437 *	* 1.6365 *	* 1.5160 *	* 2.5667 *
11	* 1.9299 *	* 1.4250 *	* 1.6319 *	* 1.3711 *	* 1.5468 *	* 1.3225 *	* 1.2880 *	* 3.0952 *
	* 1.8779 *	* 1.4582 *	* 1.6426 *	* 1.4138 *	* 1.5481 *	* 1.2914 *	* 1.2756 *	* 2.9354 *
	* 1.8261 *	* 1.4519 *	* 1.6218 *	* 1.4231 *	* 1.5495 *	* 1.2922 *	* 1.2911 *	* 2.9150 *
	* 1.7265 *	* 1.4077 *	* 1.5611 *	* 1.3919 *	* 1.5286 *	* 1.3623 *	* 1.3624 *	* 2.9244 *
	* 1.6992 *	* 1.3957 *	* 1.5491 *	* 1.3864 *	* 1.5219 *	* 1.4233 *	* 1.4273 *	* 2.8793 *
	* 1.7345 *	* 1.4488 *	* 1.5977 *	* 1.4502 *	* 1.5660 *	* 1.5199 *	* 1.5351 *	* 2.7401 *
12	* 1.4527 *	* 1.7520 *	* 1.3443 *	* 1.5472 *	* 1.5423 *	* 1.3417 *	* 2.3056 *	
	* 1.4615 *	* 1.7919 *	* 1.3525 *	* 1.5497 *	* 1.5713 *	* 1.3352 *	* 2.1550 *	
	* 1.4348 *	* 1.7797 *	* 1.3692 *	* 1.5507 *	* 1.5963 *	* 1.3372 *	* 2.1334 *	
	* 1.4076 *	* 1.7157 *	* 1.3863 *	* 1.5292 *	* 1.6395 *	* 1.3838 *	* 2.1540 *	
	* 1.4350 *	* 1.6986 *	* 1.3819 *	* 1.5220 *	* 1.6551 *	* 1.4413 *	* 2.1543 *	
	* 1.5083 *	* 1.7318 *	* 1.4439 *	* 1.5658 *	* 1.6928 *	* 1.5193 *	* 2.1126 *	
13	* 1.6197 *	* 1.4358 *	* 1.4713 *	* 1.3245 *	* 1.3430 *	* 2.3429 *	* 4.1596 *	
	* 1.6439 *	* 1.4485 *	* 1.4837 *	* 1.2932 *	* 1.3369 *	* 2.2465 *	* 3.9928 *	
	* 1.6696 *	* 1.4711 *	* 1.5099 *	* 1.2938 *	* 1.3386 *	* 2.2274 *	* 3.9194 *	
	* 1.7431 *	* 1.5400 *	* 1.5786 *	* 1.3629 *	* 1.3842 *	* 2.2097 *	* 3.7363 *	
	* 1.7717 *	* 1.5741 *	* 1.5992 *	* 1.4233 *	* 1.4413 *	* 2.1787 *	* 3.5634 *	
	* 1.7983 *	* 1.6106 *	* 1.6365 *	* 1.5196 *	* 1.5194 *	* 2.1279 *	* 3.2548 *	
14	* 1.3306 *	* 1.2951 *	* 1.2745 *	* 1.2903 *	* 2.3074 *	* 4.2627 *		
	* 1.3527 *	* 1.3146 *	* 1.2970 *	* 1.2778 *	* 2.1567 *	* 4.0834 *		
	* 1.3432 *	* 1.3087 *	* 1.3039 *	* 1.2929 *	* 2.1347 *	* 4.0065 *		
	* 1.3956 *	* 1.3749 *	* 1.3738 *	* 1.3630 *	* 2.1543 *	* 3.8135 *		
	* 1.4491 *	* 1.4356 *	* 1.4389 *	* 1.4272 *	* 2.1545 *	* 3.6323 *		
	* 1.5172 *	* 1.5107 *	* 1.5158 *	* 1.5348 *	* 2.1109 *	* 3.3129 *		
15	* 2.9242 *	* 2.8157 *	* 2.9014 *	* 3.1009 *	4 EFPD	118 % POWER		
	* 2.7500 *	* 2.6444 *	* 2.7543 *	* 2.9409 *	75 EFPD	118 % POWER		
	* 2.6977 *	* 2.5951 *	* 2.7285 *	* 2.9195 *	125 EFPD	118 % POWER		
	* 2.6556 *	* 2.5623 *	* 2.7325 *	* 2.9265 *	250 EFPD	118 % POWER		
	* 2.5962 *	* 2.5167 *	* 2.6906 *	* 2.8802 *	350 EFPD	118 % POWER		
	* 2.4656 *	* 2.4034 *	* 2.5667 *	* 2.7404 *	500 EFPD	118 % POWER		

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 237 of 312

TABLE A-2 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.7848	* 1.8206	* 1.6110	* 1.8496	* 1.4000	* 1.5564	* 1.2901	* 2.7661
	* 1.9647	* 1.9352	* 1.6345	* 1.8597	* 1.4549	* 1.6307	* 1.3528	* 2.6933
	* 1.9766	* 1.8963	* 1.5428	* 1.8167	* 1.4372	* 1.6633	* 1.3494	* 2.6531
	* 1.8629	* 1.7319	* 1.3781	* 1.6866	* 1.3829	* 1.6964	* 1.3757	* 2.5542
	* 1.8048	* 1.6729	* 1.3497	* 1.6291	* 1.3811	* 1.6961	* 1.3956	* 2.4552
	* 1.7917	* 1.6735	* 1.3980	* 1.6312	* 1.4259	* 1.6900	* 1.4322	* 2.2843
9	* 1.8206	* 1.3817	* 1.7678	* 1.3686	* 1.6724	* 1.3809	* 1.2529	* 2.6551
	* 1.9352	* 1.4921	* 1.8896	* 1.4470	* 1.7679	* 1.4352	* 1.3108	* 2.5855
	* 1.8963	* 1.4892	* 1.8639	* 1.4484	* 1.7643	* 1.4638	* 1.3121	* 2.5488
	* 1.7319	* 1.3975	* 1.7089	* 1.3827	* 1.6709	* 1.5025	* 1.3539	* 2.4588
	* 1.6729	* 1.3698	* 1.6462	* 1.3455	* 1.6127	* 1.5060	* 1.3814	* 2.3749
	* 1.6735	* 1.3986	* 1.6482	* 1.3687	* 1.6045	* 1.5128	* 1.4254	* 2.2223
10	* 1.6110	* 1.7733	* 1.5301	* 1.5552	* 1.2975	* 1.4132	* 1.2329	* 2.7400
	* 1.6345	* 1.8942	* 1.6603	* 1.6178	* 1.3484	* 1.4674	* 1.2938	* 2.6972
	* 1.5428	* 1.8668	* 1.6752	* 1.6060	* 1.3733	* 1.5005	* 1.3071	* 2.6846
	* 1.3781	* 1.7122	* 1.6085	* 1.5191	* 1.3633	* 1.5388	* 1.3527	* 2.6176
	* 1.3497	* 1.6484	* 1.5716	* 1.4802	* 1.3345	* 1.5307	* 1.3848	* 2.5282
	* 1.3980	* 1.6489	* 1.5789	* 1.4981	* 1.3628	* 1.5360	* 1.4306	* 2.3593
11	* 1.8496	* 1.3727	* 1.5615	* 1.3215	* 1.4842	* 1.2820	* 1.2488	* 2.9196
	* 1.8597	* 1.4514	* 1.6240	* 1.4097	* 1.5355	* 1.2896	* 1.2737	* 2.8694
	* 1.8167	* 1.4524	* 1.6115	* 1.4216	* 1.5430	* 1.2967	* 1.2953	* 2.8617
	* 1.6866	* 1.3863	* 1.5227	* 1.3669	* 1.4889	* 1.3402	* 1.3421	* 2.8115
	* 1.6291	* 1.3478	* 1.4827	* 1.3374	* 1.4575	* 1.3683	* 1.3740	* 2.7166
	* 1.6312	* 1.3699	* 1.4996	* 1.3687	* 1.4687	* 1.4314	* 1.4467	* 2.5319
12	* 1.4000	* 1.6744	* 1.2992	* 1.4846	* 1.4832	* 1.2993	* 2.1701	*
	* 1.4549	* 1.7701	* 1.3504	* 1.5371	* 1.5566	* 1.3331	* 2.1004	*
	* 1.4372	* 1.7671	* 1.3750	* 1.5441	* 1.5884	* 1.3401	* 2.0878	*
	* 1.3829	* 1.6725	* 1.3647	* 1.4894	* 1.5963	* 1.3634	* 2.0672	*
	* 1.3811	* 1.6143	* 1.3354	* 1.4576	* 1.5864	* 1.3880	* 2.0241	*
	* 1.4259	* 1.6051	* 1.3630	* 1.4686	* 1.5906	* 1.4317	* 1.9402	*
13	* 1.5564	* 1.3826	* 1.4161	* 1.2839	* 1.3006	* 2.2206	* 3.9255	*
	* 1.6307	* 1.4368	* 1.4703	* 1.2915	* 1.3349	* 2.2090	* 3.8908	*
	* 1.6633	* 1.4651	* 1.5031	* 1.2983	* 1.3415	* 2.1993	* 3.8362	*
	* 1.6964	* 1.5032	* 1.5401	* 1.3408	* 1.3639	* 2.1361	* 3.5933	*
	* 1.6961	* 1.5065	* 1.5314	* 1.3683	* 1.3881	* 2.0669	* 3.3616	*
	* 1.6900	* 1.5130	* 1.5360	* 1.4311	* 1.4319	* 1.9738	* 3.0065	*
14	* 1.2901	* 1.2548	* 1.2349	* 1.2511	* 2.1722	* 4.0165	*	*
	* 1.3528	* 1.3124	* 1.2959	* 1.2759	* 2.1027	* 3.9731	*	*
	* 1.3494	* 1.3135	* 1.3088	* 1.2971	* 2.0897	* 3.9160	*	*
	* 1.3757	* 1.3545	* 1.3532	* 1.3428	* 2.0682	* 3.6626	*	*
	* 1.3956	* 1.3814	* 1.3848	* 1.3740	* 2.0237	* 3.4241	*	*
	* 1.4322	* 1.4253	* 1.4304	* 1.4464	* 1.9391	* 3.0609	*	*
15	* 2.7661	* 2.6565	* 2.7446	* 2.9250	* 4 EFPD	118 % POWER		
	* 2.6933	* 2.5869	* 2.7017	* 2.8748	* 75 EFPD	118 % POWER		
	* 2.6531	* 2.5499	* 2.6883	* 2.8661	* 125 EFPD	118 % POWER		
	* 2.5542	* 2.4592	* 2.6188	* 2.8135	* 250 EFPD	118 % POWER		
	* 2.4552	* 2.3749	* 2.5285	* 2.7174	* 350 EFPD	118 % POWER		
	* 2.2843	* 2.2222	* 2.3592	* 2.5321	* 500 EFPD	118 % POWER		

CNEI-0400-355
Appendix A, Rev. 0
Page 238 of 312

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

	H	G	F	E	D	C	B	A
8	1.6955	1.7289	1.5248	1.7451	1.3256	1.4733	1.2232	2.6603
	1.9422	1.9138	1.6196	1.8370	1.4419	1.6173	1.3447	2.7140
	1.9713	1.8946	1.5460	1.8151	1.4375	1.6616	1.3561	2.7022
	1.8387	1.7125	1.3617	1.6651	1.3626	1.6682	1.3533	2.5647
	1.7528	1.6221	1.3040	1.5790	1.3318	1.6393	1.3466	2.4206
	1.6971	1.5855	1.3163	1.5464	1.3427	1.5965	1.3450	2.1993
9	1.7289	1.3098	1.6737	1.2951	1.5816	1.3088	1.1920	2.5602
	1.9138	1.4753	1.8660	1.4301	1.7453	1.4221	1.3028	2.6107
	1.8946	1.4871	1.8610	1.4462	1.7604	1.4637	1.3171	2.6003
	1.7125	1.3789	1.6874	1.3655	1.6489	1.4735	1.3335	2.4709
	1.6221	1.3224	1.5967	1.2996	1.5730	1.4526	1.3317	2.3437
	1.5855	1.3165	1.5620	1.2881	1.5358	1.4243	1.3378	2.1379
10	1.5248	1.6790	1.4459	1.4687	1.2301	1.3414	1.1738	2.6410
	1.6196	1.8705	1.6340	1.5944	1.3400	1.4530	1.2862	2.7264
	1.5460	1.8639	1.6650	1.5986	1.3757	1.4993	1.3125	2.7383
	1.3617	1.6907	1.5808	1.4941	1.3454	1.5097	1.3338	2.6365
	1.3040	1.5989	1.5167	1.4300	1.2916	1.4771	1.3350	2.5059
	1.3163	1.5632	1.4893	1.4137	1.2805	1.4472	1.3426	2.2835
11	1.7451	1.2990	1.4746	1.2530	1.4032	1.2160	1.1919	2.8256
	1.8370	1.4344	1.6006	1.3948	1.5211	1.2833	1.2702	2.9135
	1.8151	1.4501	1.6042	1.4189	1.5359	1.3016	1.3022	2.9328
	1.6651	1.3691	1.4979	1.3502	1.4649	1.3165	1.3268	2.8281
	1.5790	1.3020	1.4325	1.2961	1.4095	1.3188	1.3263	2.6852
	1.5464	1.2894	1.4151	1.2858	1.3838	1.3433	1.3582	2.4381
12	1.3256	1.5834	1.2317	1.4036	1.4031	1.2342	2.0996	
	1.4419	1.7474	1.3419	1.5227	1.5419	1.3297	2.1319	
	1.4375	1.7630	1.3773	1.5370	1.5841	1.3482	2.1384	
	1.3626	1.6505	1.3469	1.4654	1.5679	1.3436	2.0758	
	1.3318	1.5737	1.2924	1.4097	1.5312	1.3395	1.9970	
	1.3427	1.5364	1.2807	1.3836	1.4967	1.3434	1.8671	
13	1.4733	1.3103	1.3441	1.2178	1.2354	2.1410	3.8056	
	1.6173	1.4236	1.4559	1.2852	1.3315	2.2263	3.9394	
	1.6616	1.4651	1.5018	1.3032	1.3496	2.2347	3.9198	
	1.6682	1.4742	1.5110	1.3171	1.3441	2.1347	3.6245	
	1.6393	1.4530	1.4778	1.3188	1.3396	2.0295	3.3252	
	1.5965	1.4245	1.4472	1.3430	1.3435	1.8879	2.9045	
14	1.2232	1.1937	1.1757	1.1940	2.1016	3.8993		
	1.3447	1.3044	1.2883	1.2723	2.1342	4.0284		
	1.3561	1.3186	1.3143	1.3041	2.1403	4.0070		
	1.3533	1.3340	1.3344	1.3274	2.0772	3.7003		
	1.3466	1.3318	1.3351	1.3264	1.9982	3.3904		
	1.3450	1.3377	1.3423	1.3580	1.8660	2.9575		
15	2.6603	2.5616	2.6454	2.8310	4 EFPD	118 %	POWER	
	2.7140	2.6120	2.7308	2.9191	75 EFPD	118 %	POWER	

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 239 of 312

TABLE A-2 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.6910	* 1.7041	* 1.3124	* 1.6740	* 1.2313	* 1.4511	* 1.1931	* 2.5585
	* 2.0231	* 1.9653	* 1.6640	* 1.8778	* 1.5038	* 1.6785	* 1.4143	* 2.7886
	* 2.0766	* 1.9786	* 1.6298	* 1.8918	* 1.5312	* 1.7477	* 1.4530	* 2.8304
	* 1.9184	* 1.7859	* 1.4429	* 1.7372	* 1.4426	* 1.7373	* 1.4348	* 2.6810
	* 1.7912	* 1.6615	* 1.3540	* 1.6179	* 1.3776	* 1.6732	* 1.3985	* 2.4854
	* 1.6785	* 1.5724	* 1.3159	* 1.5351	* 1.3395	* 1.5786	* 1.3441	* 2.1954
9	* 1.7041	* 1.2922	* 1.6447	* 1.2635	* 1.5494	* 1.2957	* 1.1714	* 2.4678
	* 1.9653	* 1.5370	* 1.9268	* 1.4815	* 1.7956	* 1.4888	* 1.3754	* 2.6881
	* 1.9786	* 1.5761	* 1.9421	* 1.5262	* 1.8324	* 1.5483	* 1.4163	* 2.7297
	* 1.7859	* 1.4632	* 1.7586	* 1.4445	* 1.7141	* 1.5402	* 1.4136	* 2.5912
	* 1.6615	* 1.3717	* 1.6343	* 1.3477	* 1.6072	* 1.4869	* 1.3823	* 2.4134
	* 1.5724	* 1.3157	* 1.5502	* 1.2892	* 1.5251	* 1.4092	* 1.3352	* 2.1396
10	* 1.3124	* 1.6487	* 1.4321	* 1.4278	* 1.2110	* 1.3248	* 1.1636	* 2.5629
	* 1.6640	* 1.9313	* 1.6930	* 1.6366	* 1.4015	* 1.5190	* 1.3594	* 2.8168
	* 1.6298	* 1.9449	* 1.7446	* 1.6682	* 1.4625	* 1.5857	* 1.4128	* 2.8785
	* 1.4429	* 1.7619	* 1.6448	* 1.5542	* 1.4228	* 1.5712	* 1.4148	* 2.7605
	* 1.3540	* 1.6370	* 1.5465	* 1.4604	* 1.3379	* 1.5046	* 1.3860	* 2.5763
	* 1.3159	* 1.5515	* 1.4695	* 1.3999	* 1.2783	* 1.4281	* 1.3404	* 2.2803
11	* 1.6740	* 1.2672	* 1.4334	* 1.2419	* 1.3800	* 1.1635	* 1.1743	* 2.7680
	* 1.8778	* 1.4859	* 1.6427	* 1.4495	* 1.5672	* 1.3525	* 1.3415	* 3.0347
	* 1.8918	* 1.5302	* 1.6738	* 1.4985	* 1.6061	* 1.3955	* 1.4008	* 3.1027
	* 1.7372	* 1.4483	* 1.5581	* 1.4275	* 1.5247	* 1.3937	* 1.4113	* 2.9762
	* 1.6179	* 1.3502	* 1.4632	* 1.3423	* 1.4400	* 1.3666	* 1.3813	* 2.7725
	* 1.5351	* 1.2906	* 1.4014	* 1.2833	* 1.3688	* 1.3369	* 1.3575	* 2.4420
12	* 1.2313	* 1.5512	* 1.2126	* 1.3804	* 1.3916	* 1.2181	* 2.0243	*
	* 1.5038	* 1.7984	* 1.4035	* 1.5685	* 1.6076	* 1.4006	* 2.2013	*
	* 1.5312	* 1.8349	* 1.4642	* 1.6072	* 1.6700	* 1.4453	* 2.2477	*
	* 1.4426	* 1.7156	* 1.4243	* 1.5252	* 1.6362	* 1.4271	* 2.1697	*
	* 1.3776	* 1.6079	* 1.3388	* 1.4402	* 1.5629	* 1.3936	* 2.0527	*
	* 1.3395	* 1.5250	* 1.2786	* 1.3686	* 1.4788	* 1.3425	* 1.8566	*
13	* 1.4511	* 1.2970	* 1.3274	* 1.1650	* 1.2194	* 2.1071	* 3.7312	*
	* 1.6785	* 1.4903	* 1.5219	* 1.3544	* 1.4024	* 2.3221	* 4.0842	*
	* 1.7477	* 1.5496	* 1.5883	* 1.3971	* 1.4467	* 2.3665	* 4.1281	*
	* 1.7373	* 1.5410	* 1.5726	* 1.3943	* 1.4276	* 2.2494	* 3.8038	*
	* 1.6732	* 1.4873	* 1.5054	* 1.3666	* 1.3937	* 2.0971	* 3.4211	*
	* 1.5786	* 1.4094	* 1.4282	* 1.3366	* 1.3427	* 1.8883	* 2.8934	*
14	* 1.1931	* 1.1728	* 1.1654	* 1.1763	* 2.0268	* 3.8251	*	*
	* 1.4143	* 1.3770	* 1.3616	* 1.3438	* 2.2040	* 4.1793	*	*
	* 1.4530	* 1.4178	* 1.4146	* 1.4028	* 2.2506	* 4.2228	*	*
	* 1.4348	* 1.4141	* 1.4154	* 1.4121	* 2.1725	* 3.8843	*	*
	* 1.3985	* 1.3824	* 1.3861	* 1.3814	* 2.0544	* 3.4905	*	*
	* 1.3441	* 1.3351	* 1.3402	* 1.3573	* 1.8561	* 2.9498	*	*
15	* 2.5585	* 2.4691	* 2.5671	* 2.7732	* 4 EFPD	118 % POWER		
	* 2.7886	* 2.6894	* 2.8211	* 3.0401	* 75 EFPD	118 % POWER		
	* 2.8304	* 2.7307	* 2.8822	* 3.1074	* 125 EFPD	118 % POWER		
	* 2.6810	* 2.5916	* 2.7621	* 2.9785	* 250 EFPD	118 % POWER		
	* 2.4854	* 2.4134	* 2.5769	* 2.7735	* 350 EFPD	118 % POWER		
	* 2.1954	* 2.1394	* 2.2802	* 2.4424	* 500 EFPD	118 % POWER		

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355

Appendix A, Rev. 0

Page 240 of 312

TABLE A-2 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.9375	* 1.8483	* 1.3124	* 1.7770	* 1.2313	* 1.6295	* 1.1931	* 2.6719
	* 2.4183	* 2.2602	* 1.6640	* 2.1475	* 1.5748	* 1.9904	* 1.5219	* 3.1564
	* 2.5096	* 2.3230	* 1.7447	* 2.2210	* 1.6944	* 2.1041	* 1.6389	* 3.2957
	* 2.2897	* 2.1106	* 1.6817	* 2.0575	* 1.6927	* 2.0719	* 1.7029	* 3.1726
	* 2.0775	* 1.9243	* 1.5877	* 1.8787	* 1.6158	* 1.9390	* 1.6471	* 2.8943
	* 1.8496	* 1.7368	* 1.4893	* 1.6996	* 1.5094	* 1.7409	* 1.5263	* 2.4592
9	* 1.8483	* 1.3044	* 1.8215	* 1.2729	* 1.6918	* 1.4388	* 1.1714	* 2.5824
	* 2.2602	* 1.6705	* 2.2177	* 1.6128	* 2.0559	* 1.7645	* 1.4941	* 3.0524
	* 2.3230	* 1.7582	* 2.2785	* 1.7005	* 2.1412	* 1.8692	* 1.6119	* 3.1892
	* 2.1106	* 1.6897	* 2.0761	* 1.6508	* 2.0140	* 1.8476	* 1.6821	* 3.0735
	* 1.9243	* 1.5877	* 1.8916	* 1.5504	* 1.8506	* 1.7353	* 1.6316	* 2.8194
	* 1.7368	* 1.4726	* 1.7111	* 1.4376	* 1.6781	* 1.5660	* 1.5147	* 2.4125
10	* 1.3124	* 1.8241	* 1.6193	* 1.5361	* 1.2295	* 1.4918	* 1.1839	* 2.7636
	* 1.6640	* 2.2227	* 1.9995	* 1.8762	* 1.5393	* 1.8119	* 1.5029	* 3.2572
	* 1.7447	* 2.2834	* 2.0860	* 1.9535	* 1.6401	* 1.9082	* 1.6191	* 3.4043
	* 1.6817	* 2.0798	* 1.9496	* 1.8302	* 1.6291	* 1.8604	* 1.6857	* 3.2850
	* 1.5877	* 1.8945	* 1.7850	* 1.6823	* 1.5396	* 1.7370	* 1.6380	* 3.0066
	* 1.4893	* 1.7127	* 1.6122	* 1.5370	* 1.4275	* 1.5693	* 1.5209	* 2.5545
11	* 1.7770	* 1.2783	* 1.5419	* 1.2424	* 1.4982	* 1.1635	* 1.2464	* 3.0098
	* 2.1475	* 1.6178	* 1.8827	* 1.5599	* 1.8092	* 1.4763	* 1.5499	* 3.5319
	* 2.2210	* 1.7053	* 1.9595	* 1.6588	* 1.8909	* 1.5955	* 1.6575	* 3.6901
	* 2.0574	* 1.6544	* 1.8345	* 1.6375	* 1.8010	* 1.6634	* 1.6980	* 3.5568
	* 1.8787	* 1.5528	* 1.6854	* 1.5451	* 1.6635	* 1.6121	* 1.6444	* 3.2503
	* 1.6996	* 1.4390	* 1.5388	* 1.4325	* 1.5103	* 1.5096	* 1.5466	* 2.7597
12	* 1.2313	* 1.6946	* 1.2313	* 1.4995	* 1.6108	* 1.2404	* 2.1057	*
	* 1.5748	* 2.0591	* 1.5416	* 1.8106	* 1.9524	* 1.5542	* 2.4943	*
	* 1.6944	* 2.1442	* 1.6423	* 1.8922	* 2.0529	* 1.6617	* 2.6215	*
	* 1.6927	* 2.0157	* 1.6307	* 1.8017	* 1.9867	* 1.6977	* 2.5651	*
	* 1.6158	* 1.8514	* 1.5405	* 1.6638	* 1.8413	* 1.6440	* 2.3864	*
	* 1.5094	* 1.6781	* 1.4277	* 1.5102	* 1.6547	* 1.5256	* 2.0902	*
13	* 1.6295	* 1.4404	* 1.4947	* 1.1650	* 1.2418	* 2.2869	* 4.0665	*
	* 1.9904	* 1.7662	* 1.8149	* 1.4782	* 1.5558	* 2.7158	* 4.7272	*
	* 2.1041	* 1.8708	* 1.9110	* 1.5971	* 1.6631	* 2.8382	* 4.8714	*
	* 2.0719	* 1.8485	* 1.8620	* 1.6641	* 1.6982	* 2.7217	* 4.5056	*
	* 1.9390	* 1.7358	* 1.7378	* 1.6122	* 1.6441	* 2.4909	* 3.9762	*
	* 1.7409	* 1.5662	* 1.5696	* 1.5094	* 1.5258	* 2.1608	* 3.2299	*
14	* 1.1931	* 1.1728	* 1.1857	* 1.2485	* 2.1103	* 4.1642	*	*
	* 1.5219	* 1.4958	* 1.5049	* 1.5524	* 2.4997	* 4.8323	*	*
	* 1.6389	* 1.6133	* 1.6208	* 1.6596	* 2.6267	* 4.9789	*	*
	* 1.7029	* 1.6826	* 1.6863	* 1.6987	* 2.5687	* 4.5987	*	*
	* 1.6471	* 1.6317	* 1.6381	* 1.6445	* 2.3888	* 4.0532	*	*
	* 1.5263	* 1.5145	* 1.5207	* 1.5465	* 2.0915	* 3.2889	*	*
15	* 2.6719	* 2.5845	* 2.7682	* 3.0154	* 4 EFPD	118 % POWER		
	* 3.1564	* 3.0544	* 3.2620	* 3.5379	* 75 EFPD	118 % POWER		
	* 3.2957	* 3.1903	* 3.4086	* 3.6953	* 125 EFPD	118 % POWER		
	* 3.1726	* 3.0738	* 3.2870	* 3.5594	* 250 EFPD	118 % POWER		
	* 2.8943	* 2.8194	* 3.0073	* 3.2515	* 350 EFPD	118 % POWER		
	* 2.4592	* 2.4123	* 2.5546	* 2.7602	* 500 EFPD	118 % POWER		

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355

Appendix A, Rev. 0

Page 241 of 312

TABLE A-2 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) NORMAL OPERATION

THIS IS LEVEL 1 OF 24

(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 4.2549	* 3.9399	* 3.0245	* 3.7485	* 2.8987	* 3.6826	* 3.0591	* 5.8690
	* 5.4373	* 4.9922	* 3.9937	* 4.7113	* 3.8204	* 4.6558	* 4.0102	* 7.2321
	* 5.6398	* 5.1636	* 4.2160	* 4.9097	* 4.1052	* 4.9274	* 4.3120	* 7.6176
	* 4.9596	* 4.5695	* 3.9453	* 4.4362	* 3.9807	* 4.6418	* 4.2902	* 7.1683
	* 4.2754	* 3.9688	* 3.5360	* 3.8642	* 3.5933	* 4.1016	* 3.9112	* 6.2508
	* 3.4766	* 3.2702	* 3.0118	* 3.1969	* 3.0435	* 3.3605	* 3.2641	* 4.8689
9	* 3.9399	* 3.1192	* 3.8630	* 2.9226	* 3.5841	* 3.4670	* 3.0248	* 5.7406
	* 4.9922	* 4.1312	* 4.8644	* 3.8438	* 4.5067	* 4.3724	* 3.9610	* 7.0772
	* 5.1636	* 4.3645	* 5.0399	* 4.0856	* 4.7208	* 4.6311	* 4.2621	* 7.4570
	* 4.5695	* 4.0700	* 4.4847	* 3.8949	* 4.3282	* 4.3938	* 4.2503	* 7.0250
	* 3.9688	* 3.6351	* 3.8969	* 3.4998	* 3.7945	* 3.8940	* 3.8814	* 6.1557
	* 3.2702	* 3.0717	* 3.2222	* 2.9739	* 3.1457	* 3.1839	* 3.2442	* 4.8187
10	* 3.0245	* 3.8726	* 3.7677	* 3.4125	* 2.8306	* 3.4830	* 3.0669	* 6.0556
	* 3.9937	* 4.8759	* 4.7748	* 4.3074	* 3.6920	* 4.3534	* 3.9939	* 7.4422
	* 4.2160	* 5.0506	* 4.9793	* 4.5036	* 3.9621	* 4.5915	* 4.2901	* 7.8384
	* 3.9453	* 4.4923	* 4.4834	* 4.1003	* 3.8401	* 4.3181	* 4.2657	* 7.3854
	* 3.5360	* 3.9027	* 3.8973	* 3.5874	* 3.4732	* 3.8199	* 3.9014	* 6.4643
	* 3.0118	* 3.2252	* 3.2063	* 2.9877	* 2.9511	* 3.1351	* 3.2641	* 5.0461
11	* 3.7485	* 2.9312	* 3.4241	* 2.8557	* 3.4358	* 2.8388	* 3.2502	* 6.7734
	* 4.7113	* 3.8547	* 4.3201	* 3.7343	* 4.2964	* 3.6977	* 4.1716	* 8.2655
	* 4.9097	* 4.0961	* 4.5161	* 3.9943	* 4.5084	* 3.9846	* 4.4465	* 8.6913
	* 4.4362	* 3.9025	* 4.1093	* 3.8594	* 4.1581	* 3.9684	* 4.3480	* 8.1651
	* 3.8642	* 3.5049	* 3.5936	* 3.4845	* 3.6588	* 3.6189	* 3.9596	* 7.1232
	* 3.1969	* 2.9770	* 2.9913	* 2.9607	* 3.0206	* 3.0579	* 3.3632	* 5.5319
12	* 2.8987	* 3.5907	* 2.8352	* 3.4394	* 3.8448	* 3.1873	* 4.6560	*
	* 3.8204	* 4.5143	* 3.6973	* 4.3004	* 4.7946	* 4.1160	* 5.7515	*
	* 4.1052	* 4.7279	* 3.9675	* 4.5117	* 5.0389	* 4.3926	* 6.0880	*
	* 3.9807	* 4.3322	* 3.8439	* 4.1598	* 4.6898	* 4.2911	* 5.8041	*
	* 3.5933	* 3.7967	* 3.4753	* 3.6595	* 4.1178	* 3.9126	* 5.1455	*
	* 3.0435	* 3.1462	* 2.9520	* 3.0207	* 3.3558	* 3.2775	* 4.1127	*
13	* 3.6826	* 3.4705	* 3.4895	* 2.8425	* 3.1909	* 4.9532	* 8.9738	*
	* 4.6558	* 4.3762	* 4.3603	* 3.7025	* 4.1202	* 6.1126	* 10.8278	*
	* 4.9274	* 4.6346	* 4.5978	* 3.9887	* 4.3962	* 6.4264	* 11.2365	*
	* 4.6418	* 4.3957	* 4.3214	* 3.9701	* 4.2926	* 6.0034	* 10.1661	*
	* 4.1016	* 3.8949	* 3.8219	* 3.6194	* 3.9130	* 5.2444	* 8.5966	*
	* 3.3605	* 3.1842	* 3.1357	* 3.0578	* 3.2782	* 4.1669	* 6.4211	*
14	* 3.0591	* 3.0273	* 3.0716	* 3.2560	* 4.6669	* 9.0397	*	*
	* 4.0102	* 3.9653	* 3.9993	* 4.1782	* 5.7643	* 10.8896	*	*
	* 4.3120	* 4.2658	* 4.2947	* 4.4522	* 6.1003	* 11.3010	*	*
	* 4.2902	* 4.2518	* 4.2674	* 4.3503	* 5.8127	* 10.2220	*	*
	* 3.9112	* 3.8818	* 3.9019	* 3.9602	* 5.1511	* 8.6432	*	*
	* 3.2641	* 3.2441	* 3.2640	* 3.3633	* 4.1154	* 6.4574	*	*
15	* 5.8690	* 5.7434	* 6.0638	* 6.7858	* 4 EFPD	118 % POWER		
	* 7.2321	* 7.0803	* 7.4512	* 8.2792	* 75 EFPD	118 % POWER		
	* 7.6176	* 7.4595	* 7.8461	* 8.7032	* 125 EFPD	118 % POWER		
	* 7.1683	* 7.0257	* 7.3885	* 8.1709	* 250 EFPD	118 % POWER		
	* 6.2508	* 6.1557	* 6.4651	* 7.1259	* 350 EFPD	118 % POWER		
	* 4.8689	* 4.8184	* 5.0459	* 5.5329	* 500 EFPD	118 % POWER		

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 242 of 312

TABLE A-3

F-DEL-H & M-DEL-H VALUES - NORMAL OPERATION

AT 100% POWER, 4 EFPD

	H	G	F	E	D	C	B	A
8	* 1.1443	* 1.1331	* 1.1849	* 1.1299	* 1.3330	* 1.2848	* 1.3966	* 0.6739 *
	* 1.4851	* 1.5162	* 1.3726	* 1.4981	* 1.2370	* 1.3492	* 1.2465	* 2.3939 *
9	* 1.1331	* 1.3598	* 1.1666	* 1.3670	* 1.2296	* 1.4315	* 1.4291	* 0.7024 *
	* 1.5162	* 1.2943	* 1.4839	* 1.2090	* 1.3891	* 1.2174	* 1.2236	* 2.3129 *
10	* 1.1849	* 1.1640	* 1.3343	* 1.3184	* 1.4247	* 1.4011	* 1.4432	* 0.6701 *
	* 1.3726	* 1.4873	* 1.2958	* 1.3239	* 1.2554	* 1.2588	* 1.2440	* 2.4612 *
11	* 1.1299	* 1.3633	* 1.3139	* 1.4016	* 1.3597	* 1.4151	* 1.4211	* 0.6275 *
	* 1.4981	* 1.2113	* 1.3278	* 1.2703	* 1.3034	* 1.2676	* 1.2569	* 2.6597 *
12	* 1.3330	* 1.2284	* 1.4230	* 1.3593	* 1.3404	* 1.3891	* 0.8444	*
	* 1.2370	* 1.3901	* 1.2002	* 1.3037	* 1.3062	* 1.2738	* 2.0019	*
13	* 1.2848	* 1.4303	* 1.3992	* 1.4134	* 1.3880	* 0.9074	* 0.4754	*
	* 1.3492	* 1.2181	* 1.2600	* 1.2689	* 1.2747	* 1.8499	* 3.4573	*
14	* 1.3966	* 1.4278	* 1.4416	* 1.4193	* 0.8436	* 0.4622	*	
	* 1.2465	* 1.2244	* 1.2451	* 1.2584	* 2.0031	* 3.5518	*	
15	* 0.6739	* 0.7022	* 0.6693	* 0.6265	F-DEL-H			
	* 2.3939	* 2.3132	* 2.4634	* 2.6625	M-DEL-H			

AT 100% POWER, 75 EFPD

	H	G	F	E	D	C	B	A
8	* 1.0503	* 1.0742	* 1.2287	* 1.1185	* 1.3512	* 1.2253	* 1.3947	* 0.6860 *
	* 1.6566	* 1.6432	* 1.4787	* 1.5754	* 1.3287	* 1.4551	* 1.2838	* 2.4805 *
9	* 1.0742	* 1.3220	* 1.0966	* 1.3609	* 1.1697	* 1.3751	* 1.4294	* 0.7155 *
	* 1.6432	* 1.3761	* 1.6224	* 1.3364	* 1.5376	* 1.3022	* 1.2598	* 2.3890 *
10	* 1.2287	* 1.0944	* 1.2405	* 1.2728	* 1.4276	* 1.3443	* 1.4385	* 0.6757 *
	* 1.4787	* 1.6252	* 1.4324	* 1.4261	* 1.2864	* 1.3595	* 1.2775	* 2.5584 *
11	* 1.1185	* 1.3573	* 1.2687	* 1.3895	* 1.3173	* 1.4701	* 1.4401	* 0.6346 *
	* 1.5754	* 1.3395	* 1.4302	* 1.3218	* 1.3721	* 1.2499	* 1.2751	* 2.7492 *
12	* 1.3512	* 1.1686	* 1.4259	* 1.3163	* 1.2803	* 1.4027	* 0.8597	*
	* 1.3287	* 1.5388	* 1.2878	* 1.3731	* 1.3909	* 1.3000	* 2.0641	*
13	* 1.2253	* 1.3740	* 1.3426	* 1.4685	* 1.4012	* 0.9072	* 0.4801	*
	* 1.4551	* 1.3029	* 1.3609	* 1.2511	* 1.3012	* 1.9059	* 3.5407	*
14	* 1.3947	* 1.4282	* 1.4369	* 1.4382	* 0.8589	* 0.4669	*	
	* 1.2838	* 1.2606	* 1.2786	* 1.2766	* 2.0655	* 3.6332	*	
15	* 0.6860	* 0.7153	* 0.6749	* 0.6337	F-DEL-H			
	* 2.4805	* 2.3895	* 2.5608	* 2.7522	M-DEL-H			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 243 of 312

TABLE A-3 (CONTINUED)

F-DEL-H & M-DEL-H VALUES - NORMAL OPERATION

AT 100% POWER, 125 EFPD

	H	G	F	E	D	C	B	A
8	* 1.0312	* 1.0757	* 1.3003	* 1.1239	* 1.3785	* 1.1895	* 1.4041	* 0.6876
	* 1.6964	* 1.6737	* 1.4004	* 1.5936	* 1.2994	* 1.4915	* 1.2683	* 2.4695
9	* 1.0757	* 1.3288	* 1.0935	* 1.3674	* 1.1587	* 1.3355	* 1.4358	* 0.7171
	* 1.6737	* 1.3803	* 1.6535	* 1.3277	* 1.5511	* 1.3347	* 1.2481	* 2.3782
10	* 1.3003	* 1.0921	* 1.2132	* 1.2636	* 1.4184	* 1.3038	* 1.4355	* 0.6722
	* 1.4004	* 1.6553	* 1.4851	* 1.4397	* 1.2970	* 1.3952	* 1.2736	* 2.6023
11	* 1.1239	* 1.3641	* 1.2597	* 1.3907	* 1.3003	* 1.4762	* 1.4187	* 0.6316
	* 1.5936	* 1.3305	* 1.4437	* 1.3229	* 1.4056	* 1.2446	* 1.2898	* 2.7856
12	* 1.3785	* 1.1572	* 1.4170	* 1.2994	* 1.2452	* 1.3985	* 0.8557	*
	* 1.2994	* 1.5528	* 1.2982	* 1.4066	* 1.4470	* 1.3019	* 2.0669	*
13	* 1.1895	* 1.3345	* 1.3024	* 1.4747	* 1.3972	* 0.9004	* 0.4820	*
	* 1.4915	* 1.3354	* 1.3964	* 1.2457	* 1.3029	* 1.9476	* 3.5233	*
14	* 1.4041	* 1.4347	* 1.4341	* 1.4171	* 0.8550	* 0.4688	*	*
	* 1.2683	* 1.2489	* 1.2745	* 1.2909	* 2.0681	* 3.6140	*	*
15	* 0.6876	* 0.7169	* 0.6715	* 0.6308	F-DEL-H			
	* 2.4695	* 2.3785	* 2.6041	* 2.7884	M-DEL-H			

AT 100% POWER, 250 EFPD

	H	G	F	E	D	C	B	A
8	* 1.0276	* 1.1015	* 1.4163	* 1.1400	* 1.4228	* 1.1224	* 1.3911	* 0.6880
	* 1.7171	* 1.6256	* 1.3000	* 1.5552	* 1.2687	* 1.5457	* 1.2730	* 2.4069
9	* 1.1015	* 1.3935	* 1.1218	* 1.4244	* 1.1579	* 1.2568	* 1.4104	* 0.7166
	* 1.6256	* 1.3176	* 1.6019	* 1.2800	* 1.5316	* 1.3876	* 1.2624	* 2.3217
10	* 1.4163	* 1.1200	* 1.1959	* 1.2648	* 1.4478	* 1.2425	* 1.4053	* 0.6663
	* 1.3000	* 1.6042	* 1.4897	* 1.4349	* 1.2701	* 1.4448	* 1.2763	* 2.5633
11	* 1.1400	* 1.4210	* 1.2617	* 1.4438	* 1.2794	* 1.4522	* 1.3767	* 0.6257
	* 1.5552	* 1.2824	* 1.4381	* 1.2726	* 1.4037	* 1.2423	* 1.3053	* 2.7415
12	* 1.4228	* 1.1569	* 1.4463	* 1.2789	* 1.1883	* 1.3849	* 0.8398	*
	* 1.2687	* 1.5328	* 1.2713	* 1.4043	* 1.4572	* 1.2856	* 2.0510	*
13	* 1.1224	* 1.2562	* 1.2415	* 1.4515	* 1.3841	* 0.8885	* 0.4932	*
	* 1.5457	* 1.3880	* 1.4457	* 1.2429	* 1.2862	* 1.9245	* 3.4160	*
14	* 1.3911	* 1.4099	* 1.4047	* 1.3759	* 0.8392	* 0.4803	*	*
	* 1.2730	* 1.2628	* 1.2767	* 1.3060	* 2.0520	* 3.5002	*	*
15	* 0.6880	* 0.7165	* 0.6660	* 0.6253	F-DEL-H			
	* 2.4069	* 2.3218	* 2.5643	* 2.7430	M-DEL-H			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 244 of 312

TABLE A-3 (CONTINUED)

F-DEL-H & M-DEL-H VALUES - NORMAL OPERATION

AT 100% POWER, 350 EFPD

	H	G	F	E	D	C	B	A
8	* 1.0267	* 1.1044	* 1.4345	* 1.1392	* 1.4185	* 1.0941	* 1.3715	* 0.6991
	* 1.7180	* 1.6209	* 1.2488	* 1.5320	* 1.2312	* 1.5538	* 1.2488	* 2.3633
9	* 1.1044	* 1.4115	* 1.1263	* 1.4525	* 1.1552	* 1.2203	* 1.3851	* 0.7270
	* 1.6209	* 1.2802	* 1.5731	* 1.2219	* 1.5084	* 1.4002	* 1.2435	* 2.2825
10	* 1.4345	* 1.1249	* 1.1880	* 1.2583	* 1.4674	* 1.2138	* 1.3796	* 0.6750
	* 1.2488	* 1.5753	* 1.4846	* 1.4110	* 1.2209	* 1.4435	* 1.2611	* 2.4800
11	* 1.1392	* 1.4501	* 1.2562	* 1.4642	* 1.2673	* 1.4194	* 1.3522	* 0.6358
	* 1.5320	* 1.2236	* 1.4133	* 1.2207	* 1.3896	* 1.2444	* 1.3017	* 2.6632
12	* 1.4185	* 1.1547	* 1.4664	* 1.2670	* 1.1640	* 1.3694	* 0.8402	*
	* 1.2312	* 1.5091	* 1.2217	* 1.3899	* 1.4803	* 1.2729	* 2.0431	*
13	* 1.0941	* 1.2200	* 1.2133	* 1.4192	* 1.3690	* 0.8945	* 0.5149	*
	* 1.5538	* 1.4005	* 1.4439	* 1.2446	* 1.2733	* 1.9069	* 3.2009	*
14	* 1.3715	* 1.3849	* 1.3794	* 1.3519	* 0.8398	* 0.5021	*	
	* 1.2488	* 1.2436	* 1.2612	* 1.3021	* 2.0438	* 3.2783	*	
15	* 0.6991	* 0.7270	* 0.6749	* 0.6355	* F-DEL-H			
	* 2.3633	* 2.2825	* 2.4805	* 2.6641	* M-DEL-H			

AT 100% POWER, 500 EFPD

	H	G	F	E	D	C	B	A
8	* 1.0221	* 1.0900	* 1.3990	* 1.1203	* 1.3785	* 1.0792	* 1.3526	* 0.7336
	* 1.6853	* 1.6080	* 1.2778	* 1.5296	* 1.2447	* 1.5500	* 1.2710	* 2.2148
9	* 1.0900	* 1.3928	* 1.1092	* 1.4307	* 1.1342	* 1.1957	* 1.3600	* 0.7609
	* 1.6080	* 1.2725	* 1.5660	* 1.2387	* 1.5074	* 1.4049	* 1.2688	* 2.1446
10	* 1.3990	* 1.1080	* 1.1641	* 1.2255	* 1.4399	* 1.1840	* 1.3554	* 0.7075
	* 1.2778	* 1.5676	* 1.4853	* 1.4209	* 1.2423	* 1.4546	* 1.2855	* 2.3275
11	* 1.1203	* 1.4294	* 1.2242	* 1.4351	* 1.2323	* 1.3716	* 1.3316	* 0.6714
	* 1.5296	* 1.2397	* 1.4223	* 1.2431	* 1.3992	* 1.2659	* 1.3270	* 2.4798
12	* 1.3785	* 1.1342	* 1.4395	* 1.2323	* 1.1393	* 1.3538	* 0.8612	*
	* 1.2447	* 1.5076	* 1.2427	* 1.3993	* 1.4800	* 1.2668	* 1.9559	*
13	* 1.0792	* 1.1956	* 1.1839	* 1.3717	* 1.3536	* 0.9212	* 0.5644	*
	* 1.5500	* 1.4050	* 1.4546	* 1.2660	* 1.2670	* 1.8193	* 2.9285	*
14	* 1.3526	* 1.3601	* 1.3555	* 1.3316	* 0.8611	* 0.5513	*	
	* 1.2710	* 1.2688	* 1.2854	* 1.3271	* 1.9558	* 2.9952	*	
15	* 0.7336	* 0.7609	* 0.7074	* 0.6713	* F-DEL-H			
	* 2.2148	* 2.1445	* 2.3277	* 2.4802	* M-DEL-H			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 245 of 312

TABLE A-3 (CONTINUED)

F-DEL-H & M-DEL-H VALUES - NORMAL OPERATION

AT 75% POWER, 4 EFPD

	H	G	F	E	D	C	B	A
8	* 1.0543	* 1.0935	* 1.1724	* 1.1385	* 1.3623	* 1.3199	* 1.4363	* 0.6827 *
	* 1.8689	* 1.9095	* 1.6719	* 1.7437	* 1.4375	* 1.5499	* 1.4525	* 2.8438 *
9	* 1.0935	* 1.3516	* 1.1634	* 1.3824	* 1.2511	* 1.4753	* 1.4683	* 0.7117 *
	* 1.9095	* 1.6097	* 1.7835	* 1.4284	* 1.6373	* 1.3986	* 1.4345	* 2.7426 *
10	* 1.1724	* 1.1602	* 1.3468	* 1.3319	* 1.4392	* 1.4354	* 1.4787	* 0.6750 *
	* 1.6719	* 1.7939	* 1.5554	* 1.5837	* 1.4019	* 1.4671	* 1.4408	* 2.9461 *
11	* 1.1385	* 1.3784	* 1.3270	* 1.3992	* 1.3536	* 1.4280	* 1.4355	* 0.6272 *
	* 1.7437	* 1.4319	* 1.5883	* 1.4693	* 1.5747	* 1.5600	* 1.5263	* 3.1997 *
12	* 1.3623	* 1.2499	* 1.4372	* 1.3523	* 1.2175	* 1.3525	* 0.8291 *	
	* 1.4375	* 1.6380	* 1.4031	* 1.5751	* 1.5745	* 1.5503	* 2.4980 *	
13	* 1.3199	* 1.4740	* 1.4333	* 1.4261	* 1.3512	* 0.8595	* 0.4528 *	
	* 1.5499	* 1.3992	* 1.4683	* 1.5617	* 1.5515	* 2.3038	* 4.3702 *	
14	* 1.4363	* 1.4669	* 1.4769	* 1.4335	* 0.8282	* 0.4400 *		
	* 1.4525	* 1.4354	* 1.4421	* 1.5281	* 2.4997	* 4.4883 *		
15	* 0.6827	* 0.7115	* 0.6741	* 0.6262	F-DEL-H			
	* 2.8438	* 2.7433	* 2.9488	* 3.2031	M-DEL-H			

AT 75% POWER, 75 EFPD

	H	G	F	E	D	C	B	A
8	* 0.9770	* 1.0465	* 1.2252	* 1.1265	* 1.3780	* 1.2564	* 1.4334	* 0.6964 *
	* 2.1190	* 2.0986	* 1.7689	* 1.8616	* 1.5397	* 1.6762	* 1.4968	* 2.9247 *
9	* 1.0465	* 1.3093	* 1.0930	* 1.3751	* 1.1861	* 1.4149	* 1.4692	* 0.7265 *
	* 2.0986	* 1.7024	* 1.9578	* 1.5787	* 1.7778	* 1.4980	* 1.4724	* 2.8205 *
10	* 1.2252	* 1.0866	* 1.2459	* 1.2833	* 1.4390	* 1.3758	* 1.4717	* 0.6821 *
	* 1.7689	* 1.9682	* 1.7306	* 1.6909	* 1.5508	* 1.5693	* 1.4908	* 3.0362 *
11	* 1.1265	* 1.3713	* 1.2788	* 1.3922	* 1.3131	* 1.4759	* 1.4568	* 0.6357 *
	* 1.8616	* 1.5821	* 1.6959	* 1.6045	* 1.6769	* 1.5403	* 1.5474	* 3.3025 *
12	* 1.3780	* 1.1848	* 1.4371	* 1.3119	* 1.1567	* 1.3750	* 0.8469 *	
	* 1.5397	* 1.7784	* 1.5525	* 1.6782	* 1.6981	* 1.5703	* 2.5478 *	
13	* 1.2564	* 1.4137	* 1.3738	* 1.4741	* 1.3734	* 0.8603	* 0.4582 *	
	* 1.6762	* 1.4987	* 1.5707	* 1.5419	* 1.5716	* 2.3885	* 4.5017 *	
14	* 1.4334	* 1.4678	* 1.4699	* 1.4548	* 0.8460	* 0.4454 *		
	* 1.4968	* 1.4734	* 1.4922	* 1.5492	* 2.5496	* 4.6170 *		
15	* 0.6964	* 0.7262	* 0.6812	* 0.6347	F-DEL-H			
	* 2.9247	* 2.8209	* 3.0386	* 3.3062	M-DEL-H			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 246 of 312

TABLE A-3 (CONTINUED)

F-DEL-H & M-DEL-H VALUES - NORMAL OPERATION

AT 75% POWER, 125 EFPD

	H	G	F	E	D	C	B	A
8	* 0.9651	* 1.0515	* 1.3012	* 1.1342	* 1.4070	* 1.2196	* 1.4462	* 0.6989
	* 2.1730	* 2.1070	* 1.6825	* 1.8581	* 1.5167	* 1.7225	* 1.5115	* 2.9190
9	* 1.0515	* 1.3186	* 1.0893	* 1.3838	* 1.1718	* 1.3732	* 1.4762	* 0.7290
	* 2.1070	* 1.6981	* 1.9673	* 1.5778	* 1.8103	* 1.5414	* 1.4790	* 2.8144
10	* 1.3012	* 1.0865	* 1.2183	* 1.2749	* 1.4266	* 1.3329	* 1.4706	* 0.6799
	* 1.6825	* 1.9717	* 1.7736	* 1.7046	* 1.5818	* 1.6233	* 1.5040	* 3.0422
11	* 1.1342	* 1.3802	* 1.2708	* 1.3938	* 1.2949	* 1.4833	* 1.4362	* 0.6327
	* 1.8581	* 1.5810	* 1.7094	* 1.6368	* 1.6977	* 1.5302	* 1.5808	* 3.3165
12	* 1.4070	* 1.1702	* 1.4250	* 1.2939	* 1.1290	* 1.3684	* 0.8421	*
	* 1.5167	* 1.8124	* 1.5834	* 1.6990	* 1.7435	* 1.6026	* 2.5526	*
13	* 1.2196	* 1.3722	* 1.3312	* 1.4817	* 1.3669	* 0.8505	* 0.4589	*
	* 1.7225	* 1.5421	* 1.6246	* 1.5317	* 1.6040	* 2.4026	* 4.4802	*
14	* 1.4462	* 1.4750	* 1.4691	* 1.4344	* 0.8413	* 0.4462	*	*
	* 1.5115	* 1.4799	* 1.5053	* 1.5824	* 2.5542	* 4.5932	*	*
15	* 0.6989	* 0.7288	* 0.6792	* 0.6318	F-DEL-H			
	* 2.9190	* 2.8148	* 3.0443	* 3.3197	M-DEL-H			

AT 75% POWER, 250 EFPD

	H	G	F	E	D	C	B	A
8	* 0.9675	* 1.0865	* 1.4335	* 1.1591	* 1.4572	* 1.1526	* 1.4373	* 0.7017
	* 2.1958	* 2.0636	* 1.5392	* 1.8353	* 1.4676	* 1.8101	* 1.4768	* 2.8975
9	* 1.0865	* 1.3905	* 1.1290	* 1.4550	* 1.1765	* 1.2931	* 1.4528	* 0.7307
	* 2.0636	* 1.6287	* 1.9197	* 1.4997	* 1.8093	* 1.6213	* 1.4646	* 2.7957
10	* 1.4335	* 1.1267	* 1.2058	* 1.2826	* 1.4684	* 1.2621	* 1.4403	* 0.6753
	* 1.5392	* 1.9232	* 1.8019	* 1.6971	* 1.5117	* 1.6968	* 1.4887	* 3.0410
11	* 1.1591	* 1.4517	* 1.2793	* 1.4466	* 1.2722	* 1.4538	* 1.3866	* 0.6260
	* 1.8353	* 1.5027	* 1.7009	* 1.5374	* 1.7120	* 1.5151	* 1.5894	* 3.3130
12	* 1.4572	* 1.1754	* 1.4667	* 1.2715	* 1.0832	* 1.3303	* 0.8206	*
	* 1.4676	* 1.8108	* 1.5132	* 1.7128	* 1.8095	* 1.5745	* 2.5739	*
13	* 1.1526	* 1.2925	* 1.2611	* 1.4530	* 1.3295	* 0.8240	* 0.4640	*
	* 1.8101	* 1.6218	* 1.6978	* 1.5159	* 1.5753	* 2.4167	* 4.3640	*
14	* 1.4373	* 1.4522	* 1.4396	* 1.3857	* 0.8200	* 0.4517	*	*
	* 1.4768	* 1.4649	* 1.4893	* 1.5903	* 2.5754	* 4.4695	*	*
15	* 0.7017	* 0.7306	* 0.6749	* 0.6255	F-DEL-H			
	* 2.8975	* 2.7958	* 3.0423	* 3.3150	M-DEL-H			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 247 of 312

TABLE A-3 (CONTINUED)

F-DEL-H & M-DEL-H VALUES - NORMAL OPERATION

AT 75% POWER, 350 EFPD

	H	G	F	E	D	C	B	A
8	* 0.9603	* 1.0923	* 1.4615	* 1.1653	* 1.4620	* 1.1277	* 1.4234	* 0.7163
	* 2.1438	* 2.0490	* 1.5093	* 1.8339	* 1.4642	* 1.8177	* 1.4895	* 2.7988
9	* 1.0923	* 1.4133	* 1.1412	* 1.4939	* 1.1797	* 1.2598	* 1.4325	* 0.7447
	* 2.0490	* 1.6011	* 1.9036	* 1.4618	* 1.7776	* 1.6339	* 1.4796	* 2.6971
10	* 1.4615	* 1.1393	* 1.2025	* 1.2819	* 1.4932	* 1.2359	* 1.4168	* 0.6862
	* 1.5093	* 1.9066	* 1.7711	* 1.6971	* 1.4767	* 1.7277	* 1.5054	* 2.9401
11	* 1.1653	* 1.4916	* 1.2796	* 1.4703	* 1.2580	* 1.4153	* 1.3591	* 0.6363
	* 1.8339	* 1.4640	* 1.7000	* 1.5086	* 1.7195	* 1.5395	* 1.6051	* 3.1868
12	* 1.4620	* 1.1790	* 1.4920	* 1.2577	* 1.0566	* 1.2987	* 0.8159	*
	* 1.4642	* 1.7788	* 1.4779	* 1.7201	* 1.8408	* 1.5827	* 2.5118	*
13	* 1.1277	* 1.2595	* 1.2355	* 1.4150	* 1.2983	* 0.8148	* 0.4791	*
	* 1.8177	* 1.6342	* 1.7282	* 1.5399	* 1.5832	* 2.3505	* 4.0902	*
14	* 1.4234	* 1.4324	* 1.4166	* 1.3588	* 0.8156	* 0.4669	*	*
	* 1.4895	* 1.4797	* 1.5056	* 1.6056	* 2.5127	* 4.1847	*	*
15	* 0.7163	* 0.7447	* 0.6861	* 0.6360	F-DEL-H			
	* 2.7988	* 2.6971	* 2.9408	* 3.1880	M-DEL-H			

AT 75% POWER, 500 EFPD

	H	G	F	E	D	C	B	A
8	* 0.9308	* 1.0767	* 1.4353	* 1.1558	* 1.4347	* 1.1251	* 1.4210	* 0.7616
	* 2.1311	* 2.0131	* 1.5051	* 1.8202	* 1.4725	* 1.8398	* 1.4817	* 2.6800
9	* 1.0767	* 1.3937	* 1.1333	* 1.4828	* 1.1676	* 1.2479	* 1.4249	* 0.7895
	* 2.0131	* 1.5787	* 1.8784	* 1.4449	* 1.7948	* 1.6613	* 1.4736	* 2.5874
10	* 1.4353	* 1.1320	* 1.1838	* 1.2553	* 1.4754	* 1.2123	* 1.4021	* 0.7266
	* 1.5051	* 1.8805	* 1.7930	* 1.6950	* 1.4607	* 1.7288	* 1.5050	* 2.8116
11	* 1.1558	* 1.4815	* 1.2538	* 1.4401	* 1.2167	* 1.3618	* 1.3389	* 0.6756
	* 1.8202	* 1.4462	* 1.6969	* 1.4962	* 1.7168	* 1.5544	* 1.5932	* 3.0099
12	* 1.4347	* 1.1675	* 1.4748	* 1.2165	* 1.0085	* 1.2523	* 0.8297	*
	* 1.4725	* 1.7953	* 1.4613	* 1.7170	* 1.8297	* 1.5649	* 2.4478	*
13	* 1.1251	* 1.2478	* 1.2123	* 1.3619	* 1.2521	* 0.8128	* 0.5165	*
	* 1.8398	* 1.6615	* 1.7288	* 1.5544	* 1.5652	* 2.2802	* 3.7542	*
14	* 1.4210	* 1.4249	* 1.4022	* 1.3389	* 0.8296	* 0.5042	*	*
	* 1.4817	* 1.4736	* 1.5050	* 1.5933	* 2.4478	* 3.8392	*	*
15	* 0.7616	* 0.7895	* 0.7266	* 0.6755	F-DEL-H			
	* 2.6800	* 2.5872	* 2.8118	* 3.0103	M-DEL-H			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 248 of 312

TABLE A-3 (CONTINUED)

F-DEL-H & M-DEL-H VALUES - NORMAL OPERATION

AT 50% POWER, 4 EFPD

	H	G	F	E	D	C	B	A
8	* 0.9895	* 1.0631	* 1.1609	* 1.1503	* 1.3973	* 1.3618	* 1.4843	* 0.6960
	* 1.7447	* 1.9036	* 1.5999	* 1.6975	* 1.3843	* 1.4939	* 1.4103	* 2.7230
9	* 1.0631	* 1.3413	* 1.1645	* 1.3999	* 1.2765	* 1.5267	* 1.5149	* 0.7256
	* 1.9036	* 1.6017	* 1.7582	* 1.3833	* 1.5867	* 1.3430	* 1.3938	* 2.6341
10	* 1.1609	* 1.1564	* 1.3587	* 1.3462	* 1.4682	* 1.4748	* 1.5201	* 0.6831
	* 1.5999	* 1.7688	* 1.5148	* 1.5487	* 1.3543	* 1.4160	* 1.4061	* 2.8427
11	* 1.1503	* 1.3956	* 1.3410	* 1.4029	* 1.3452	* 1.4398	* 1.4503	* 0.6287
	* 1.6975	* 1.3863	* 1.5535	* 1.4203	* 1.5186	* 1.5202	* 1.5113	* 3.1347
12	* 1.3973	* 1.2750	* 1.4660	* 1.3438	* 1.1584	* 1.3015	* 0.8120	*
	* 1.3843	* 1.5869	* 1.3556	* 1.5190	* 1.4947	* 1.5183	* 2.3858	*
13	* 1.3618	* 1.5252	* 1.4725	* 1.4377	* 1.3001	* 0.8012	* 0.4280	*
	* 1.4939	* 1.3437	* 1.4172	* 1.5216	* 1.5194	* 2.2455	* 4.2989	*
14	* 1.4843	* 1.5133	* 1.5181	* 1.4480	* 0.8111	* 0.4157	*	*
	* 1.4103	* 1.3947	* 1.4072	* 1.5130	* 2.3874	* 4.3217	*	*
15	* 0.6960	* 0.7253	* 0.6821	* 0.6276	F-DEL-H			
	* 2.7230	* 2.6345	* 2.8453	* 3.1382	M-DEL-H			

AT 50% POWER, 75 EFPD

	H	G	F	E	D	C	B	A
8	* 0.9137	* 1.0174	* 1.2245	* 1.1392	* 1.4120	* 1.2956	* 1.4828	* 0.7123
	* 2.0892	* 2.0692	* 1.8459	* 1.8719	* 1.5704	* 1.6882	* 1.5122	* 2.9232
9	* 1.0174	* 1.2955	* 1.0927	* 1.3921	* 1.2066	* 1.4636	* 1.5178	* 0.7429
	* 2.0692	* 1.7118	* 1.9725	* 1.6271	* 1.7710	* 1.5048	* 1.4879	* 2.8219
10	* 1.2245	* 1.0860	* 1.2517	* 1.2954	* 1.4481	* 1.4126	* 1.5112	* 0.6927
	* 1.8459	* 1.9832	* 1.7255	* 1.6984	* 1.5568	* 1.5880	* 1.5149	* 3.0588
11	* 1.1392	* 1.3880	* 1.2905	* 1.3917	* 1.3037	* 1.4765	* 1.4729	* 0.6388
	* 1.8719	* 1.6309	* 1.7036	* 1.5933	* 1.6065	* 1.4968	* 1.5360	* 3.3665
12	* 1.4120	* 1.2052	* 1.4460	* 1.3023	* 1.1060	* 1.3322	* 0.8310	*
	* 1.5704	* 1.7718	* 1.5584	* 1.6079	* 1.6522	* 1.5512	* 2.4562	*
13	* 1.2956	* 1.4623	* 1.4104	* 1.4745	* 1.3304	* 0.8003	* 0.4332	*
	* 1.6882	* 1.5057	* 1.5895	* 1.4983	* 1.5524	* 2.3025	* 4.3698	*
14	* 1.4828	* 1.5162	* 1.5092	* 1.4706	* 0.8300	* 0.4208	*	*
	* 1.5122	* 1.4889	* 1.5162	* 1.5377	* 2.4582	* 4.4776	*	*
15	* 0.7123	* 0.7426	* 0.6918	* 0.6378	F-DEL-H			
	* 2.9232	* 2.8224	* 3.0613	* 3.3704	M-DEL-H			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 249 of 312

TABLE A-3 (CONTINUED)

F-DEL-H & M-DEL-H VALUES - NORMAL OPERATION

AT 50% POWER, 125 EFPD

	H	G	F	E	D	C	B	A
8	* 0.8912	* 1.0272	* 1.3095	* 1.1566	* 1.4526	* 1.2657	* 1.5031	* 0.7191
	* 2.1579	* 2.0920	* 1.7333	* 1.8998	* 1.5278	* 1.7227	* 1.4848	* 2.9596
9	* 1.0272	* 1.3093	* 1.0937	* 1.4085	* 1.1942	* 1.4285	* 1.5342	* 0.7507
	* 2.0920	* 1.7382	* 2.0279	* 1.6056	* 1.8391	* 1.5359	* 1.4654	* 2.8640
10	* 1.3095	* 1.0907	* 1.2214	* 1.2919	* 1.4335	* 1.3731	* 1.5191	* 0.6961
	* 1.7333	* 2.0328	* 1.7716	* 1.7383	* 1.5595	* 1.6213	* 1.4946	* 3.1138
11	* 1.1566	* 1.4049	* 1.2873	* 1.3917	* 1.2803	* 1.4822	* 1.4544	* 0.6379
	* 1.8998	* 1.6092	* 1.7436	* 1.6020	* 1.6587	* 1.4794	* 1.5452	* 3.3970
12	* 1.4526	* 1.1924	* 1.4317	* 1.2790	* 1.0591	* 1.3069	* 0.8212	*
	* 1.5278	* 1.8416	* 1.5609	* 1.6600	* 1.6939	* 1.5457	* 2.5160	*
13	* 1.2657	* 1.4274	* 1.3713	* 1.4804	* 1.3054	* 0.7707	* 0.4278	*
	* 1.7227	* 1.5367	* 1.6227	* 1.4808	* 1.5470	* 2.3628	* 4.3681	*
14	* 1.5031	* 1.5328	* 1.5174	* 1.4524	* 0.8203	* 0.4157	*	*
	* 1.4848	* 1.4664	* 1.4959	* 1.5468	* 2.5180	* 4.4747	*	*
15	* 0.7191	* 0.7505	* 0.6954	* 0.6370	F-DEL-H			
	* 2.9596	* 2.8645	* 3.1162	* 3.4007	M-DEL-H			

AT 50% POWER, 250 EFPD

	H	G	F	E	D	C	B	A
8	* 0.8894	* 1.0699	* 1.4603	* 1.1931	* 1.5124	* 1.1830	* 1.4315	* 0.7070
	* 2.1739	* 2.0420	* 1.5274	* 1.8115	* 1.4396	* 1.7593	* 1.4362	* 2.8098
9	* 1.0699	* 1.3861	* 1.1418	* 1.4988	* 1.2079	* 1.3377	* 1.5090	* 0.7389
	* 2.0420	* 1.6257	* 1.8780	* 1.4747	* 1.7502	* 1.5778	* 1.4228	* 2.7110
10	* 1.4603	* 1.1394	* 1.1888	* 1.3070	* 1.5023	* 1.2979	* 1.4932	* 0.6913
	* 1.5274	* 1.8818	* 1.7445	* 1.6698	* 1.4816	* 1.6544	* 1.4507	* 2.9635
11	* 1.1931	* 1.4953	* 1.3035	* 1.4443	* 1.2637	* 1.4588	* 1.4083	* 0.6352
	* 1.8115	* 1.4779	* 1.6740	* 1.5120	* 1.6678	* 1.4711	* 1.5465	* 3.2653
12	* 1.5124	* 1.2066	* 1.5004	* 1.2628	* 1.0078	* 1.2518	* 0.8027	*
	* 1.4396	* 1.7521	* 1.4833	* 1.6688	* 1.7222	* 1.5284	* 2.4739	*
13	* 1.1830	* 1.3370	* 1.2968	* 1.4578	* 1.2509	* 0.7369	* 0.4320	*
	* 1.7593	* 1.5783	* 1.6553	* 1.4720	* 1.5293	* 2.3216	* 4.2310	*
14	* 1.4315	* 1.5083	* 1.4924	* 1.4073	* 0.8020	* 0.4204	*	*
	* 1.4362	* 1.4231	* 1.4514	* 1.5477	* 2.4756	* 4.3302	*	*
15	* 0.7070	* 0.7388	* 0.6909	* 0.6347	F-DEL-H			
	* 2.8098	* 2.7112	* 2.9650	* 3.2676	M-DEL-H			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 250 of 312

TABLE A-3 (CONTINUED)

F-DEL-H & M-DEL-H VALUES - NORMAL OPERATION

AT 50% POWER, 350 EFPD

	H	G	F	E	D	C	B	A
8	* 0.8835	* 1.0788	* 1.4945	* 1.2024	* 1.5219	* 1.1548	* 1.3631	* 0.7064
	* 1.9484	* 2.0078	* 1.4617	* 1.7618	* 1.4035	* 1.7603	* 1.4207	* 2.7433
9	* 1.0788	* 1.4093	* 1.1568	* 1.5446	* 1.2154	* 1.2918	* 1.4788	* 0.7382
	* 2.0078	* 1.5559	* 1.8364	* 1.4058	* 1.7278	* 1.5764	* 1.4092	* 2.6488
10	* 1.4945	* 1.1549	* 1.1797	* 1.3108	* 1.5390	* 1.2738	* 1.4688	* 0.6994
	* 1.4617	* 1.8395	* 1.7313	* 1.6255	* 1.4396	* 1.6309	* 1.4431	* 2.8965
11	* 1.2024	* 1.5421	* 1.3083	* 1.4774	* 1.2589	* 1.4286	* 1.3880	* 0.6478
	* 1.7618	* 1.4082	* 1.6285	* 1.4760	* 1.6319	* 1.4655	* 1.5040	* 3.0513
12	* 1.5219	* 1.2147	* 1.5377	* 1.2583	* 0.9873	* 1.2311	* 0.8043	*
	* 1.4035	* 1.7292	* 1.4401	* 1.6326	* 1.7412	* 1.5086	* 2.4563	*
13	* 1.1548	* 1.2914	* 1.2733	* 1.4283	* 1.2304	* 0.7339	* 0.4505	*
	* 1.7603	* 1.5768	* 1.6312	* 1.4660	* 1.5092	* 2.2942	* 4.0580	*
14	* 1.3631	* 1.4785	* 1.4686	* 1.3876	* 0.8039	* 0.4389	*	*
	* 1.4207	* 1.4094	* 1.4434	* 1.5045	* 2.4574	* 4.1498	*	*
15	* 0.7064	* 0.7382	* 0.6992	* 0.6476	F-DEL-H			
	* 2.7433	* 2.6489	* 2.8973	* 3.0526	M-DEL-H			

AT 50% POWER, 500 EFPD

	H	G	F	E	D	C	B	A
8	* 0.8517	* 1.0631	* 1.4692	* 1.1966	* 1.4982	* 1.1411	* 1.3169	* 0.7240
	* 1.7921	* 1.9965	* 1.4657	* 1.7693	* 1.4237	* 1.7820	* 1.4266	* 2.6191
9	* 1.0631	* 1.3828	* 1.1453	* 1.5374	* 1.2072	* 1.2617	* 1.4576	* 0.7644
	* 1.9965	* 1.5499	* 1.8365	* 1.3946	* 1.7400	* 1.6024	* 1.4177	* 2.5329
10	* 1.4692	* 1.1440	* 1.1370	* 1.2852	* 1.5301	* 1.2578	* 1.4588	* 0.7384
	* 1.4657	* 1.8388	* 1.7482	* 1.6413	* 1.4019	* 1.6461	* 1.4521	* 2.7622
11	* 1.1966	* 1.5371	* 1.2838	* 1.4550	* 1.2344	* 1.3933	* 1.3883	* 0.6964
	* 1.7693	* 1.3961	* 1.6434	* 1.4456	* 1.6600	* 1.4602	* 1.4702	* 2.8608
12	* 1.4982	* 1.2072	* 1.5296	* 1.2343	* 0.9473	* 1.2201	* 0.8342	*
	* 1.4237	* 1.7407	* 1.4021	* 1.6603	* 1.6687	* 1.5143	* 2.3739	*
13	* 1.1411	* 1.2616	* 1.2578	* 1.3935	* 1.2197	* 0.7460	* 0.4977	*
	* 1.7820	* 1.6026	* 1.6459	* 1.4603	* 1.5146	* 2.2343	* 3.7467	*
14	* 1.3169	* 1.4578	* 1.4590	* 1.3883	* 0.8341	* 0.4858	*	*
	* 1.4266	* 1.4177	* 1.4521	* 1.4703	* 2.3741	* 3.8259	*	*
15	* 0.7240	* 0.7644	* 0.7384	* 0.6963	F-DEL-H			
	* 2.6191	* 2.5328	* 2.7625	* 2.8612	M-DEL-H			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 251 of 312

* JOB/DATE QCS02Apr2019 CREATED BY SMARG11 COMPILED 20Feb2018 COLR FILE
/nfe/mcd/mle/c2c24/ma/pflr/pflrpe_ghost.clr
TABLE A-4

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	0.4954	0.5655	0.6671	0.5908	0.6738	0.5717	0.5852	0.3301
	3.4729	3.4491	2.9286	3.2121	2.7980	3.2766	3.1698	5.0623
9	0.5655	0.6378	0.5799	0.6701	0.6060	0.5756	0.5881	0.3390
	3.4491	3.0702	3.3468	2.8651	3.1595	3.2643	3.1695	4.9722
10	0.6671	0.5792	0.5801	0.6233	0.6712	0.5845	0.5733	0.3149
	2.9286	3.3518	3.3748	3.1211	2.9098	3.3150	3.3241	5.3928
11	0.5908	0.6689	0.6221	0.6637	0.5995	0.6227	0.5391	0.2830
	3.2121	2.8687	3.1276	2.9256	3.2400	3.0804	3.6061	6.1833
12	0.6738	0.6052	0.6705	0.5990	0.5039	0.5319	0.3955	
	2.7980	3.1609	2.9129	3.2424	3.5772	3.3937	4.3513	
13	0.5717	0.5754	0.5841	0.6224	0.5316	0.3922	0.2200	
	3.2766	3.2656	3.3172	3.0821	3.3957	4.4808	7.7158	
14	0.5852	0.5880	0.5731	0.5388	0.3950	0.2141		
	3.1698	3.1702	3.3256	3.6085	4.3562	7.8621		
15	0.3301	0.3389	0.3147	0.2828	F-SUB-Q			
	5.0623	4.9729	5.3954	6.1881	M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	1.0769	1.1576	1.4345	1.1891	1.4614	1.2015	1.3857	0.7151
	1.7452	1.7149	1.3842	1.6286	1.3166	1.5901	1.3657	2.3874
9	1.1576	1.4226	1.1696	1.4288	1.2177	1.2852	1.3961	0.7357
	1.7149	1.3984	1.6976	1.3736	1.5968	1.4856	1.3618	2.3427
10	1.4345	1.1681	1.2703	1.2975	1.4282	1.2809	1.3707	0.6806
	1.3842	1.7002	1.5726	1.5304	1.3922	1.5405	1.4174	2.5471
11	1.1891	1.4253	1.2952	1.4217	1.2863	1.4100	1.2964	0.6276
	1.6286	1.3758	1.5336	1.3826	1.5189	1.3819	1.5106	2.8448
12	1.4614	1.2167	1.4270	1.2857	1.1475	1.3086	0.8561	
	1.3166	1.5973	1.3933	1.5196	1.6079	1.4394	2.0458	
13	1.2015	1.2849	1.2804	1.4093	1.3078	0.8495	0.4836	
	1.5901	1.4860	1.5412	1.3825	1.4402	2.1711	3.5867	
14	1.3857	1.3959	1.3702	1.2957	0.8550	0.4699		
	1.3657	1.3620	1.4179	1.5116	2.0481	3.6602		
15	0.7151	0.7356	0.6803	0.6272	F-SUB-Q			
	2.3874	2.3429	2.5483	2.8467	M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 252 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2947	* 1.2911	* 1.3142	* 1.2999	* 1.3993	* 1.3763	* 1.4190	* 0.7846
	* 1.5333	* 1.5481	* 1.5405	* 1.5114	* 1.3889	* 1.4057	* 1.3554	* 2.2046
9	* 1.2911	* 1.4827	* 1.3233	* 1.4672	* 1.3562	* 1.4788	* 1.4380	* 0.8092
	* 1.5481	* 1.3655	* 1.5292	* 1.3627	* 1.4438	* 1.3139	* 1.3447	* 2.1557
10	* 1.3142	* 1.3217	* 1.4661	* 1.4327	* 1.4735	* 1.4669	* 1.4497	* 0.7652
	* 1.5405	* 1.5352	* 1.3820	* 1.4060	* 1.3495	* 1.3593	* 1.3570	* 2.3010
11	* 1.2999	* 1.4649	* 1.4300	* 1.4779	* 1.4437	* 1.4267	* 1.4273	* 0.7155
	* 1.5114	* 1.3649	* 1.4091	* 1.3644	* 1.3708	* 1.3902	* 1.3903	* 2.5298
12	* 1.3993	* 1.3556	* 1.4727	* 1.4429	* 1.4141	* 1.4066	* 0.9436	*
	* 1.3889	* 1.4441	* 1.3503	* 1.3710	* 1.3740	* 1.3800	* 1.8871	*
13	* 1.3763	* 1.4784	* 1.4665	* 1.4260	* 1.4059	* 0.9842	* 0.5518	*
	* 1.4057	* 1.3143	* 1.3598	* 1.3909	* 1.3806	* 1.9426	* 3.2079	*
14	* 1.4190	* 1.4376	* 1.4493	* 1.4265	* 0.9427	* 0.5401	*	
	* 1.3554	* 1.3451	* 1.3575	* 1.3912	* 1.8887	* 3.2490	*	
15	* 0.7846	* 0.8091	* 0.7648	* 0.7150	* F-SUB-Q			
	* 2.2046	* 2.1559	* 2.3021	* 2.5314	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3819	* 1.3628	* 1.3713	* 1.3365	* 1.4987	* 1.4607	* 1.5268	* 0.7950
	* 1.4667	* 1.4950	* 1.4968	* 1.4899	* 1.3132	* 1.3407	* 1.2753	* 2.2040
9	* 1.3628	* 1.5782	* 1.3908	* 1.5567	* 1.4295	* 1.5857	* 1.5520	* 0.8221
	* 1.4950	* 1.3026	* 1.4793	* 1.3080	* 1.3900	* 1.2378	* 1.2630	* 2.1494
10	* 1.3713	* 1.3884	* 1.5616	* 1.5040	* 1.5811	* 1.5713	* 1.5688	* 0.7833
	* 1.4968	* 1.4846	* 1.3149	* 1.3579	* 1.2738	* 1.2848	* 1.2695	* 2.2839
11	* 1.3365	* 1.5478	* 1.5007	* 1.5791	* 1.5329	* 1.5396	* 1.5378	* 0.7356
	* 1.4899	* 1.3110	* 1.3615	* 1.2883	* 1.3053	* 1.3093	* 1.3104	* 2.4922
12	* 1.4987	* 1.4289	* 1.5802	* 1.5325	* 1.5261	* 1.5213	* 0.9630	
	* 1.3132	* 1.3904	* 1.2746	* 1.3056	* 1.2998	* 1.3025	* 1.8829	
13	* 1.4607	* 1.5852	* 1.5708	* 1.5387	* 1.5206	* 1.0374	* 0.5653	
	* 1.3407	* 1.2381	* 1.2853	* 1.3100	* 1.3032	* 1.8866	* 3.1966	
14	* 1.5268	* 1.5516	* 1.5683	* 1.5368	* 0.9624	* 0.5531	*	
	* 1.2753	* 1.2633	* 1.2700	* 1.3113	* 1.8838	* 3.2396	*	
15	* 0.7950	* 0.8220	* 0.7828	* 0.7351	* F-SUB-Q			
	* 2.2040	* 2.1496	* 2.2855	* 2.4940	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 253 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3958	* 1.3735	* 1.3891	* 1.3394	* 1.5305	* 1.4832	* 1.5705	* 0.7997
	* 1.4811	* 1.5119	* 1.5047	* 1.5092	* 1.3046	* 1.3396	* 1.2575	* 2.2245
9	* 1.3735	* 1.6049	* 1.3996	* 1.5826	* 1.4445	* 1.6195	* 1.5994	* 0.8305
	* 1.5119	* 1.3034	* 1.4929	* 1.3038	* 1.3972	* 1.2252	* 1.2434	* 2.1599
10	* 1.3891	* 1.3969	* 1.5798	* 1.5248	* 1.6189	* 1.6038	* 1.6182	* 0.7920
	* 1.5047	* 1.4994	* 1.3184	* 1.3598	* 1.2618	* 1.2760	* 1.2474	* 2.2917
11	* 1.3394	* 1.5742	* 1.5211	* 1.6107	* 1.5648	* 1.5868	* 1.5899	* 0.7458
	* 1.5092	* 1.3064	* 1.3635	* 1.2771	* 1.3032	* 1.2937	* 1.2898	* 2.4919
12	* 1.5305	* 1.4438	* 1.6178	* 1.5644	* 1.5595	* 1.5704	* 0.9802	*
	* 1.3046	* 1.3976	* 1.2627	* 1.3035	* 1.2976	* 1.2872	* 1.8870	*
13	* 1.4832	* 1.6191	* 1.6032	* 1.5858	* 1.5696	* 1.0618	* 0.5705	*
	* 1.3396	* 1.2256	* 1.2765	* 1.2944	* 1.2879	* 1.8838	* 3.2382	*
14	* 1.5705	* 1.5989	* 1.6177	* 1.5888	* 0.9797	* 0.5582	*	*
	* 1.2575	* 1.2438	* 1.2479	* 1.2907	* 1.8877	* 3.2815	*	*
15	* 0.7997	* 0.8305	* 0.7914	* 0.7452	* F-SUB-Q			
	* 2.2245	* 2.1602	* 2.2934	* 2.4938	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3904	* 1.3672	* 1.3873	* 1.3335	* 1.5377	* 1.4881	* 1.5873	* 0.8019
	* 1.5114	* 1.5434	* 1.5284	* 1.5413	* 1.3197	* 1.3576	* 1.2648	* 2.2571
9	* 1.3672	* 1.6053	* 1.3937	* 1.5843	* 1.4446	* 1.6339	* 1.6192	* 0.8342
	* 1.5434	* 1.3211	* 1.5189	* 1.3188	* 1.4216	* 1.2341	* 1.2489	* 2.1875
10	* 1.3873	* 1.3908	* 1.5781	* 1.5287	* 1.6299	* 1.6145	* 1.6388	* 0.7967
	* 1.5284	* 1.5222	* 1.3363	* 1.3760	* 1.2723	* 1.2836	* 1.2499	* 2.3141
11	* 1.3335	* 1.5800	* 1.5247	* 1.6164	* 1.5752	* 1.6064	* 1.6140	* 0.7512
	* 1.5413	* 1.3216	* 1.3796	* 1.2889	* 1.3188	* 1.2994	* 1.2891	* 2.5086
12	* 1.5377	* 1.4437	* 1.6287	* 1.5748	* 1.5702	* 1.5906	* 0.9923	*
	* 1.3197	* 1.4221	* 1.2733	* 1.3191	* 1.3145	* 1.2970	* 1.8993	*
13	* 1.4881	* 1.6334	* 1.6137	* 1.6053	* 1.5897	* 1.0728	* 0.5736	*
	* 1.3576	* 1.2345	* 1.2842	* 1.3003	* 1.2978	* 1.9086	* 3.2953	*
14	* 1.5873	* 1.6185	* 1.6381	* 1.6127	* 0.9918	* 0.5609	*	*
	* 1.2648	* 1.2493	* 1.2505	* 1.2902	* 1.9002	* 3.3414	*	*
15	* 0.8019	* 0.8341	* 0.7961	* 0.7505	* F-SUB-Q			
	* 2.2571	* 2.1878	* 2.3159	* 2.5107	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 254 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3931	* 1.3686	* 1.3960	* 1.3367	* 1.5576	* 1.5020	* 1.6153	* 0.8000
	* 1.5320	* 1.5637	* 1.5341	* 1.5667	* 1.3279	* 1.3703	* 1.2671	* 2.3086
9	* 1.3686	* 1.6182	* 1.3968	* 1.6008	* 1.4532	* 1.6576	* 1.6494	* 0.8332
	* 1.5637	* 1.3221	* 1.5320	* 1.3258	* 1.4409	* 1.2396	* 1.2497	* 2.2343
10	* 1.3960	* 1.3937	* 1.5874	* 1.5416	* 1.6539	* 1.6346	* 1.6702	* 0.7964
	* 1.5341	* 1.5355	* 1.3435	* 1.3803	* 1.2753	* 1.2860	* 1.2468	* 2.3552
11	* 1.3367	* 1.5972	* 1.5373	* 1.6382	* 1.5939	* 1.6363	* 1.6458	* 0.7505
	* 1.5667	* 1.3288	* 1.3842	* 1.2908	* 1.3254	* 1.2896	* 1.2759	* 2.5411
12	* 1.5576	* 1.4523	* 1.6526	* 1.5935	* 1.5896	* 1.6190	* 0.9933	*
	* 1.3279	* 1.4414	* 1.2764	* 1.3258	* 1.3228	* 1.2983	* 1.9271	*
13	* 1.5020	* 1.6570	* 1.6335	* 1.6350	* 1.6181	* 1.0785	* 0.5713	*
	* 1.3703	* 1.2401	* 1.2867	* 1.2906	* 1.2991	* 1.9348	* 3.3729	*
14	* 1.6153	* 1.6485	* 1.6693	* 1.6444	* 0.9928	* 0.5578	*	
	* 1.2671	* 1.2503	* 1.2475	* 1.2771	* 1.9279	* 3.4253	*	
15	* 0.8000	* 0.8330	* 0.7957	* 0.7497	* F-SUB-Q			
	* 2.3086	* 2.2347	* 2.3573	* 2.5434	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3894	* 1.3638	* 1.3948	* 1.3342	* 1.5657	* 1.5085	* 1.6302	* 0.7984
	* 1.5597	* 1.5941	* 1.5619	* 1.6030	* 1.3504	* 1.3930	* 1.2839	* 2.3670
9	* 1.3638	* 1.6193	* 1.3938	* 1.6066	* 1.4551	* 1.6712	* 1.6662	* 0.8320
	* 1.5941	* 1.3447	* 1.5625	* 1.3414	* 1.4690	* 1.2567	* 1.2635	* 2.2888
10	* 1.3948	* 1.3906	* 1.5886	* 1.5463	* 1.6676	* 1.6451	* 1.6877	* 0.7962
	* 1.5619	* 1.5662	* 1.3646	* 1.3978	* 1.2883	* 1.2974	* 1.2569	* 2.4019
11	* 1.3342	* 1.6028	* 1.5417	* 1.6502	* 1.6029	* 1.6524	* 1.6639	* 0.7502
	* 1.6030	* 1.3445	* 1.4019	* 1.2993	* 1.3368	* 1.2981	* 1.2833	* 2.5747
12	* 1.5657	* 1.4541	* 1.6662	* 1.6024	* 1.5993	* 1.6339	* 0.9953	*
	* 1.3504	* 1.4701	* 1.2895	* 1.3372	* 1.3333	* 1.3040	* 1.9508	*
13	* 1.5085	* 1.6705	* 1.6438	* 1.6510	* 1.6329	* 1.0813	* 0.5699	*
	* 1.3930	* 1.2573	* 1.2983	* 1.2992	* 1.3049	* 1.9608	* 3.4259	*
14	* 1.6302	* 1.6652	* 1.6867	* 1.6623	* 0.9948	* 0.5558	*	
	* 1.2839	* 1.2642	* 1.2577	* 1.2845	* 1.9516	* 3.4831	*	
15	* 0.7984	* 0.8318	* 0.7954	* 0.7493	* F-SUB-Q			
	* 2.3670	* 2.2893	* 2.4041	* 2.5772	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 255 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3897	* 1.3627	* 1.3987	* 1.3352	* 1.5797	* 1.5182	* 1.6494	* 0.7963
	* 1.6047	* 1.6384	* 1.5885	* 1.6412	* 1.3736	* 1.4191	* 1.3027	* 2.4370
9	* 1.3627	* 1.6264	* 1.3947	* 1.6176	* 1.4605	* 1.6884	* 1.6868	* 0.8289
	* 1.6384	* 1.3657	* 1.5903	* 1.3599	* 1.4978	* 1.2762	* 1.2793	* 2.3582
10	* 1.3987	* 1.3913	* 1.5943	* 1.5545	* 1.6854	* 1.6590	* 1.7091	* 0.7951
	* 1.5885	* 1.5942	* 1.3859	* 1.4174	* 1.3035	* 1.3123	* 1.2686	* 2.4600
11	* 1.3352	* 1.6136	* 1.5497	* 1.6666	* 1.6150	* 1.6724	* 1.6846	* 0.7476
	* 1.6412	* 1.3632	* 1.4218	* 1.3195	* 1.3613	* 1.3125	* 1.2942	* 2.6319
12	* 1.5797	* 1.4594	* 1.6838	* 1.6146	* 1.6118	* 1.6522	* 0.9946	*
	* 1.3736	* 1.4989	* 1.3048	* 1.3617	* 1.3592	* 1.3227	* 2.0007	*
13	* 1.5182	* 1.6875	* 1.6575	* 1.6709	* 1.6511	* 1.0823	* 0.5676	*
	* 1.4191	* 1.2769	* 1.3134	* 1.3137	* 1.3236	* 2.0088	* 3.5211	*
14	* 1.6494	* 1.6856	* 1.7078	* 1.6829	* 0.9940	* 0.5529	*	*
	* 1.3027	* 1.2801	* 1.2696	* 1.2955	* 2.0015	* 3.5843	*	*
15	* 0.7963	* 0.8287	* 0.7943	* 0.7467	* F-SUB-Q			
	* 2.4370	* 2.3588	* 2.4624	* 2.6347	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3700	* 1.3428	* 1.3742	* 1.3179	* 1.5596	* 1.5076	* 1.6334	* 0.7975
	* 1.6722	* 1.7038	* 1.6559	* 1.7108	* 1.4338	* 1.4735	* 1.3560	* 2.5095
9	* 1.3428	* 1.6001	* 1.3760	* 1.5963	* 1.4459	* 1.6776	* 1.6725	* 0.8324
	* 1.7038	* 1.4217	* 1.6534	* 1.4153	* 1.5553	* 1.3233	* 1.3283	* 2.4203
10	* 1.3742	* 1.3726	* 1.5756	* 1.5391	* 1.6690	* 1.6467	* 1.6944	* 0.7974
	* 1.6559	* 1.6575	* 1.4390	* 1.4694	* 1.3478	* 1.3572	* 1.3141	* 2.5198
11	* 1.3179	* 1.5922	* 1.5341	* 1.6494	* 1.6019	* 1.6566	* 1.6714	* 0.7517
	* 1.7108	* 1.4189	* 1.4741	* 1.3706	* 1.4109	* 1.3550	* 1.3350	* 2.6842
12	* 1.5596	* 1.4447	* 1.6672	* 1.6015	* 1.5992	* 1.6369	* 1.0035	*
	* 1.4338	* 1.5565	* 1.3491	* 1.4113	* 1.4128	* 1.3753	* 2.0324	*
13	* 1.5076	* 1.6766	* 1.6450	* 1.6549	* 1.6358	* 1.0838	* 0.5707	*
	* 1.4735	* 1.3241	* 1.3585	* 1.3563	* 1.3763	* 2.0729	* 3.6057	*
14	* 1.6334	* 1.6711	* 1.6929	* 1.6695	* 1.0027	* 0.5560	*	*
	* 1.3560	* 1.3292	* 1.3151	* 1.3365	* 2.0336	* 3.6693	*	*
15	* 0.7975	* 0.8322	* 0.7965	* 0.7507	* F-SUB-Q			
	* 2.5095	* 2.4209	* 2.5224	* 2.6873	* M-SUB-Q			

CNEI-0400-355
Appendix A, Rev. 0
Page 256 of 312

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

	H	G	F	E	D	C	B	A
8	* 1.3794	* 1.3505	* 1.3906	* 1.3269	* 1.5879	* 1.5291	* 1.6672	* 0.7925 *
	* 1.7101	* 1.7453	* 1.6883	* 1.7563	* 1.4579	* 1.5050	* 1.3757	* 2.6137 *
9	* 1.3505	* 1.6220	* 1.3859	* 1.6208	* 1.4596	* 1.7066	* 1.7074	* 0.8264 *
	* 1.7453	* 1.4473	* 1.6952	* 1.4390	* 1.5920	* 1.3464	* 1.3455	* 2.5230 *
10	* 1.3906	* 1.3823	* 1.5925	* 1.5575	* 1.7004	* 1.6728	* 1.7305	* 0.7931 *
	* 1.6883	* 1.6997	* 1.4706	* 1.5002	* 1.3643	* 1.3783	* 1.3283	* 2.6144 *
11	* 1.3269	* 1.6164	* 1.5522	* 1.6794	* 1.6241	* 1.6909	* 1.7051	* 0.7461 *
	* 1.7563	* 1.4428	* 1.5052	* 1.3848	* 1.4322	* 1.3690	* 1.3497	* 2.7884 *
12	* 1.5879	* 1.4583	* 1.6986	* 1.6237	* 1.6221	* 1.6682	* 0.9957	*
	* 1.4579	* 1.5933	* 1.3657	* 1.4326	* 1.4319	* 1.3872	* 2.1069	*
13	* 1.5291	* 1.7055	* 1.6709	* 1.6891	* 1.6669	* 1.0836	* 0.5646	*
	* 1.5050	* 1.3473	* 1.3798	* 1.3704	* 1.3882	* 2.1272	* 3.7346	*
14	* 1.6672	* 1.7059	* 1.7289	* 1.7031	* 0.9950	* 0.5490	*	
	* 1.3757	* 1.3466	* 1.3295	* 1.3512	* 2.1080	* 3.8079	*	
15	* 0.7925	* 0.8261	* 0.7922	* 0.7451	* F-SUB-Q			
	* 2.6137	* 2.5237	* 2.6173	* 2.7918	* M-SUB-Q			

	H	G	F	E	D	C	B	A
8	* 1.3749	* 1.3451	* 1.3872	* 1.3232	* 1.5923	* 1.5346	* 1.6762	* 0.7907
	* 1.7788	* 1.8169	* 1.7526	* 1.8282	* 1.5113	* 1.5595	* 1.4224	* 2.7216
9	* 1.3451	* 1.6203	* 1.3820	* 1.6224	* 1.4592	* 1.7157	* 1.7177	* 0.8253
	* 1.8169	* 1.5013	* 1.7616	* 1.4899	* 1.6533	* 1.3920	* 1.3884	* 2.6241
10	* 1.3872	* 1.3783	* 1.5915	* 1.5590	* 1.7076	* 1.6805	* 1.7411	* 0.7922
	* 1.7526	* 1.7664	* 1.5251	* 1.5530	* 1.4090	* 1.4233	* 1.3697	* 2.7138
11	* 1.3232	* 1.6179	* 1.5536	* 1.6853	* 1.6283	* 1.7003	* 1.7154	* 0.7452
	* 1.8282	* 1.4939	* 1.5583	* 1.4299	* 1.4808	* 1.4118	* 1.3907	* 2.8881
12	* 1.5923	* 1.4578	* 1.7056	* 1.6278	* 1.6268	* 1.6760	* 0.9961	*
	* 1.5113	* 1.6547	* 1.4106	* 1.4811	* 1.4792	* 1.4301	* 2.1816	*
13	* 1.5346	* 1.7143	* 1.6784	* 1.6982	* 1.6747	* 1.0840	* 0.5631	*
	* 1.5595	* 1.3930	* 1.4250	* 1.4134	* 1.4312	* 2.1994	* 3.8698	*
14	* 1.6762	* 1.7159	* 1.7393	* 1.7132	* 0.9954	* 0.5471	*	
	* 1.4224	* 1.3897	* 1.3710	* 1.3924	* 2.1827	* 3.9491	*	
15	* 0.7907	* 0.8250	* 0.7911	* 0.7441	* F-SUB-Q			
	* 2.7216	* 2.6249	* 2.7170	* 2.8918	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 257 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3578	* 1.3278	* 1.3664	* 1.3079	* 1.5752	* 1.5259	* 1.6631	* 0.7906 *
	* 1.7646	* 1.7981	* 1.7377	* 1.8109	* 1.5075	* 1.5572	* 1.4285	* 2.7146 *
9	* 1.3278	* 1.5979	* 1.3658	* 1.6041	* 1.4462	* 1.7073	* 1.7059	* 0.8270 *
	* 1.7981	* 1.4906	* 1.7424	* 1.4852	* 1.6462	* 1.3959	* 1.3983	* 2.6126 *
10	* 1.3664	* 1.3620	* 1.5751	* 1.5457	* 1.6936	* 1.6714	* 1.7291	* 0.7932 *
	* 1.7377	* 1.7471	* 1.5172	* 1.5447	* 1.4167	* 1.4311	* 1.3810	* 2.7127 *
11	* 1.3079	* 1.5995	* 1.5400	* 1.6706	* 1.6169	* 1.6874	* 1.7045	* 0.7468 *
	* 1.8109	* 1.4893	* 1.5502	* 1.4443	* 1.4937	* 1.4233	* 1.4062	* 2.8918 *
12	* 1.5752	* 1.4448	* 1.6915	* 1.6165	* 1.6160	* 1.6630	* 1.0023	*
	* 1.5075	* 1.6477	* 1.4184	* 1.4941	* 1.4999	* 1.4523	* 2.1770	*
13	* 1.5259	* 1.7058	* 1.6691	* 1.6852	* 1.6616	* 1.0843	* 0.5648	*
	* 1.5572	* 1.3970	* 1.4331	* 1.4250	* 1.4535	* 2.2219	* 3.9039	*
14	* 1.6631	* 1.7040	* 1.7271	* 1.7021	* 1.0014	* 0.5488	*	*
	* 1.4285	* 1.3998	* 1.3825	* 1.4081	* 2.1787	* 3.9831	*	*
15	* 0.7906	* 0.8267	* 0.7921	* 0.7456	* F-SUB-Q			
	* 2.7146	* 2.6136	* 2.7163	* 2.8961	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3651	* 1.3334	* 1.3801	* 1.3143	* 1.6000	* 1.5449	* 1.6940	* 0.7844 *
	* 1.7118	* 1.7464	* 1.6769	* 1.7583	* 1.4489	* 1.5015	* 1.3690	* 2.6678 *
9	* 1.3334	* 1.6165	* 1.3733	* 1.6250	* 1.4567	* 1.7336	* 1.7381	* 0.8193 *
	* 1.7464	* 1.4374	* 1.6906	* 1.4305	* 1.5949	* 1.3416	* 1.3390	* 2.5713 *
10	* 1.3801	* 1.3694	* 1.5887	* 1.5610	* 1.7218	* 1.6954	* 1.7624	* 0.7878 *
	* 1.6769	* 1.6953	* 1.4674	* 1.4920	* 1.3585	* 1.3761	* 1.3216	* 2.6629 *
11	* 1.3143	* 1.6201	* 1.5550	* 1.6973	* 1.6358	* 1.7190	* 1.7353	* 0.7399 *
	* 1.7583	* 1.4346	* 1.4976	* 1.3852	* 1.4385	* 1.3615	* 1.3460	* 2.8442 *
12	* 1.6000	* 1.4552	* 1.7195	* 1.6354	* 1.6361	* 1.6910	* 0.9931	*
	* 1.4489	* 1.5965	* 1.3602	* 1.4389	* 1.4433	* 1.3909	* 2.1397	*
13	* 1.5449	* 1.7320	* 1.6928	* 1.7167	* 1.6895	* 1.0821	* 0.5580	*
	* 1.5015	* 1.3428	* 1.3782	* 1.3633	* 1.3921	* 2.1669	* 3.8424	*
14	* 1.6940	* 1.7360	* 1.7602	* 1.7327	* 0.9923	* 0.5411	*	*
	* 1.3690	* 1.3405	* 1.3232	* 1.3479	* 2.1412	* 3.9278	*	*
15	* 0.7844	* 0.8189	* 0.7867	* 0.7387	* F-SUB-Q			
	* 2.6678	* 2.5723	* 2.6667	* 2.8487	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 258 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3628	* 1.3303	* 1.3799	* 1.3121	* 1.6074	* 1.5526	* 1.7068	* 0.7808
	* 1.6557	* 1.6886	* 1.6181	* 1.6996	* 1.3941	* 1.4452	* 1.3144	* 2.5869
9	* 1.3303	* 1.6185	* 1.3716	* 1.6296	* 1.4574	* 1.7456	* 1.7521	* 0.8157
	* 1.6886	* 1.3849	* 1.6329	* 1.3779	* 1.5409	* 1.2901	* 1.2857	* 2.4928
10	* 1.3799	* 1.3675	* 1.5899	* 1.5645	* 1.7321	* 1.7057	* 1.7770	* 0.7852
	* 1.6181	* 1.6376	* 1.4169	* 1.4388	* 1.3069	* 1.3246	* 1.2688	* 2.5774
11	* 1.3122	* 1.6246	* 1.5583	* 1.7063	* 1.6420	* 1.7323	* 1.7491	* 0.7359
	* 1.6996	* 1.3820	* 1.4443	* 1.3344	* 1.3885	* 1.3080	* 1.2921	* 2.7575
12	* 1.6074	* 1.4558	* 1.7297	* 1.6415	* 1.6430	* 1.7019	* 0.9904	*
	* 1.3941	* 1.5425	* 1.3086	* 1.3889	* 1.3938	* 1.3384	* 2.0711	*
13	* 1.5526	* 1.7438	* 1.7027	* 1.7298	* 1.7003	* 1.0802	* 0.5546	*
	* 1.4452	* 1.2913	* 1.3267	* 1.3098	* 1.3396	* 2.0976	* 3.7232	*
14	* 1.7068	* 1.7498	* 1.7746	* 1.7463	* 0.9896	* 0.5373	*	
	* 1.3144	* 1.2872	* 1.2704	* 1.2941	* 2.0725	* 3.8103	*	
15	* 0.7808	* 0.8153	* 0.7840	* 0.7346	* F-SUB-Q			
	* 2.5869	* 2.4939	* 2.5812	* 2.7621	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3568	* 1.3236	* 1.3742	* 1.3065	* 1.6066	* 1.5540	* 1.7099	* 0.7798
	* 1.6100	* 1.6429	* 1.5737	* 1.6536	* 1.3509	* 1.3982	* 1.2705	* 2.5097
9	* 1.3236	* 1.6135	* 1.3659	* 1.6272	* 1.4541	* 1.7499	* 1.7563	* 0.8158
	* 1.6429	* 1.3451	* 1.5877	* 1.3363	* 1.4955	* 1.2458	* 1.2414	* 2.4148
10	* 1.3742	* 1.3617	* 1.5861	* 1.5627	* 1.7338	* 1.7085	* 1.7816	* 0.7849
	* 1.5737	* 1.5924	* 1.3749	* 1.3944	* 1.2632	* 1.2797	* 1.2249	* 2.4967
11	* 1.3065	* 1.6221	* 1.5564	* 1.7073	* 1.6421	* 1.7356	* 1.7531	* 0.7370
	* 1.6536	* 1.3404	* 1.3999	* 1.2900	* 1.3428	* 1.2627	* 1.2467	* 2.6652
12	* 1.6066	* 1.4525	* 1.7313	* 1.6417	* 1.6435	* 1.7040	* 0.9921	*
	* 1.3509	* 1.4971	* 1.2650	* 1.3432	* 1.3475	* 1.2925	* 1.9995	*
13	* 1.5540	* 1.7480	* 1.7054	* 1.7330	* 1.7023	* 1.0814	* 0.5540	*
	* 1.3982	* 1.2471	* 1.2820	* 1.2646	* 1.2936	* 2.0256	* 3.6044	*
14	* 1.7099	* 1.7539	* 1.7789	* 1.7502	* 0.9912	* 0.5366	*	
	* 1.2705	* 1.2430	* 1.2265	* 1.2487	* 2.0010	* 3.6898	*	
15	* 0.7798	* 0.8154	* 0.7836	* 0.7356	* F-SUB-Q			
	* 2.5097	* 2.4159	* 2.5006	* 2.6699	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 259 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3453	* 1.3120	* 1.3592	* 1.2959	* 1.5935	* 1.5479	* 1.6996	* 0.7817
	* 1.7023	* 1.7381	* 1.6700	* 1.7505	* 1.4297	* 1.4731	* 1.3413	* 2.6291
9	* 1.3120	* 1.5973	* 1.3548	* 1.6135	* 1.4448	* 1.7441	* 1.7470	* 0.8197
	* 1.7381	* 1.4257	* 1.6799	* 1.4143	* 1.5795	* 1.3113	* 1.3090	* 2.5236
10	* 1.3592	* 1.3506	* 1.5746	* 1.5535	* 1.7225	* 1.7019	* 1.7720	* 0.7874
	* 1.6700	* 1.6850	* 1.4530	* 1.4716	* 1.3330	* 1.3471	* 1.2914	* 2.6118
11	* 1.2959	* 1.6082	* 1.5470	* 1.6954	* 1.6336	* 1.7254	* 1.7445	* 0.7401
	* 1.7505	* 1.4187	* 1.4776	* 1.3610	* 1.4140	* 1.3311	* 1.3128	* 2.7841
12	* 1.5935	* 1.4431	* 1.7198	* 1.6331	* 1.6351	* 1.6934	* 0.9996	*
	* 1.4297	* 1.5813	* 1.3349	* 1.4143	* 1.4182	* 1.3617	* 2.0793	*
13	* 1.5479	* 1.7421	* 1.6986	* 1.7227	* 1.6918	* 1.0835	* 0.5565	*
	* 1.4731	* 1.3127	* 1.3496	* 1.3331	* 1.3629	* 2.1168	* 3.7602	*
14	* 1.6996	* 1.7445	* 1.7692	* 1.7414	* 0.9985	* 0.5392	*	*
	* 1.3413	* 1.3108	* 1.2933	* 1.3149	* 2.0812	* 3.8476	*	*
15	* 0.7817	* 0.8193	* 0.7861	* 0.7387	* F-SUB-Q			
	* 2.6291	* 2.5249	* 2.6160	* 2.7892	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3602	* 1.3251	* 1.3814	* 1.3089	* 1.6259	* 1.5719	* 1.7371	* 0.7766
	* 1.6351	* 1.6742	* 1.6013	* 1.6906	* 1.3666	* 1.4145	* 1.2796	* 2.5819
9	* 1.3251	* 1.6258	* 1.3698	* 1.6427	* 1.4611	* 1.7766	* 1.7854	* 0.8127
	* 1.6742	* 1.3645	* 1.6192	* 1.3543	* 1.5229	* 1.2548	* 1.2481	* 2.4832
10	* 1.3814	* 1.3653	* 1.5962	* 1.5758	* 1.7569	* 1.7310	* 1.8116	* 0.7827
	* 1.6013	* 1.6244	* 1.3967	* 1.4138	* 1.2727	* 1.2903	* 1.2306	* 2.5617
11	* 1.3089	* 1.6372	* 1.5690	* 1.7286	* 1.6580	* 1.7631	* 1.7802	* 0.7326
	* 1.6906	* 1.3587	* 1.4198	* 1.2984	* 1.3548	* 1.2680	* 1.2522	* 2.7412
12	* 1.6259	* 1.4594	* 1.7541	* 1.6575	* 1.6601	* 1.7266	* 0.9902	*
	* 1.3666	* 1.5246	* 1.2746	* 1.3552	* 1.3559	* 1.2980	* 2.0432	*
13	* 1.5719	* 1.7745	* 1.7274	* 1.7602	* 1.7249	* 1.0816	* 0.5500	*
	* 1.4145	* 1.2562	* 1.2929	* 1.2700	* 1.2993	* 2.0609	* 3.7028	*
14	* 1.7371	* 1.7827	* 1.8086	* 1.7770	* 0.9893	* 0.5318	*	*
	* 1.2796	* 1.2499	* 1.2325	* 1.2543	* 2.0447	* 3.7968	*	*
15	* 0.7766	* 0.8123	* 0.7814	* 0.7311	* F-SUB-Q			
	* 2.5819	* 2.4845	* 2.5661	* 2.7463	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 260 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3645	* 1.3283	* 1.3856	* 1.3123	* 1.6346	* 1.5807	* 1.7476	* 0.7766
	* 1.5694	* 1.6109	* 1.5423	* 1.6297	* 1.3136	* 1.3597	* 1.2292	* 2.5007
9	* 1.3283	* 1.6326	* 1.3744	* 1.6501	* 1.4667	* 1.7893	* 1.7966	* 0.8130
	* 1.6109	* 1.3120	* 1.5586	* 1.3021	* 1.4659	* 1.2037	* 1.1979	* 2.4038
10	* 1.3856	* 1.3699	* 1.6041	* 1.5838	* 1.7658	* 1.7417	* 1.8229	* 0.7829
	* 1.5423	* 1.5636	* 1.3419	* 1.3581	* 1.2215	* 1.2383	* 1.1808	* 2.4788
11	* 1.3123	* 1.6445	* 1.5769	* 1.7375	* 1.6663	* 1.7731	* 1.7888	* 0.7322
	* 1.6297	* 1.3064	* 1.3640	* 1.2446	* 1.2987	* 1.2160	* 1.2019	* 2.6537
12	* 1.6346	* 1.4649	* 1.7630	* 1.6658	* 1.6682	* 1.7344	* 0.9906	
	* 1.3136	* 1.4676	* 1.2235	* 1.2990	* 1.2981	* 1.2444	* 1.9708	
13	* 1.5807	* 1.7871	* 1.7380	* 1.7701	* 1.7326	* 1.0826	* 0.5492	
	* 1.3597	* 1.2051	* 1.2408	* 1.2180	* 1.2456	* 1.9844	* 3.5877	
14	* 1.7476	* 1.7938	* 1.8199	* 1.7855	* 0.9896	* 0.5308		
	* 1.2292	* 1.1997	* 1.1827	* 1.2041	* 1.9723	* 3.6804		
15	* 0.7766	* 0.8126	* 0.7815	* 0.7307	* F-SUB-Q			
	* 2.5007	* 2.4051	* 2.4831	* 2.6589	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3545	* 1.3186	* 1.3669	* 1.3044	* 1.6126	* 1.5703	* 1.7227	* 0.7822
	* 1.5330	* 1.5743	* 1.5181	* 1.5923	* 1.2927	* 1.3283	* 1.2100	* 2.4121
9	* 1.3186	* 1.6111	* 1.3661	* 1.6296	* 1.4590	* 1.7757	* 1.7720	* 0.8210
	* 1.5743	* 1.2904	* 1.5224	* 1.2799	* 1.4302	* 1.1764	* 1.1779	* 2.3128
10	* 1.3669	* 1.3617	* 1.5948	* 1.5736	* 1.7415	* 1.7286	* 1.7970	* 0.7880
	* 1.5181	* 1.5273	* 1.3098	* 1.3265	* 1.2010	* 1.2097	* 1.1615	* 2.3915
11	* 1.3044	* 1.6240	* 1.5667	* 1.7149	* 1.6541	* 1.7466	* 1.7613	* 0.7390
	* 1.5923	* 1.2842	* 1.3322	* 1.2221	* 1.2676	* 1.1964	* 1.1830	* 2.5526
12	* 1.6126	* 1.4572	* 1.7387	* 1.6537	* 1.6550	* 1.7088	* 1.0014	*
	* 1.2927	* 1.4319	* 1.2029	* 1.2679	* 1.2671	* 1.2233	* 1.8904	*
13	* 1.5703	* 1.7735	* 1.7249	* 1.7436	* 1.7071	* 1.0852	* 0.5545	*
	* 1.3283	* 1.1778	* 1.2123	* 1.1984	* 1.2246	* 1.9183	* 3.4479	*
14	* 1.7227	* 1.7692	* 1.7940	* 1.7580	* 1.0001	* 0.5368	*	
	* 1.2100	* 1.1797	* 1.1634	* 1.1851	* 1.8924	* 3.5314	*	
15	* 0.7822	* 0.8205	* 0.7866	* 0.7375	* F-SUB-Q			
	* 2.4121	* 2.3141	* 2.3957	* 2.5576	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 261 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3681	* 1.3326	* 1.3863	* 1.3263	* 1.6311	* 1.5874	* 1.7382	* 0.7807 *
	* 1.4812	* 1.5203	* 1.4614	* 1.5290	* 1.2472	* 1.2819	* 1.1697	* 2.3607 *
9	* 1.3326	* 1.6298	* 1.3840	* 1.6501	* 1.4777	* 1.7947	* 1.7863	* 0.8172 *
	* 1.5203	* 1.2449	* 1.4668	* 1.2335	* 1.3781	* 1.1349	* 1.1393	* 2.2694 *
10	* 1.3863	* 1.3795	* 1.6167	* 1.5959	* 1.7573	* 1.7479	* 1.8120	* 0.7843 *
	* 1.4614	* 1.4715	* 1.2607	* 1.2760	* 1.1604	* 1.1662	* 1.1229	* 2.3458 *
11	* 1.3263	* 1.6445	* 1.5889	* 1.7304	* 1.6731	* 1.7620	* 1.7707	* 0.7326 *
	* 1.5290	* 1.2376	* 1.2815	* 1.1806	* 1.2214	* 1.1557	* 1.1468	* 2.5137 *
12	* 1.6311	* 1.4760	* 1.7544	* 1.6726	* 1.6727	* 1.7200	* 0.9915	*
	* 1.2472	* 1.3797	* 1.1623	* 1.2217	* 1.2218	* 1.1843	* 1.8620	*
13	* 1.5874	* 1.7925	* 1.7442	* 1.7590	* 1.7182	* 1.0783	* 0.5494	*
	* 1.2819	* 1.1362	* 1.1686	* 1.1576	* 1.1855	* 1.8824	* 3.3970	*
14	* 1.7382	* 1.7835	* 1.8089	* 1.7675	* 0.9903	* 0.5312	*	*
	* 1.1697	* 1.1410	* 1.1247	* 1.1489	* 1.8639	* 3.4840	*	*
15	* 0.7807	* 0.8167	* 0.7830	* 0.7311	* F-SUB-Q			
	* 2.3607	* 2.2706	* 2.3499	* 2.5188	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3260	* 1.3066	* 1.3846	* 1.3352	* 1.5887	* 1.5537	* 1.6951	* 0.7850 *
	* 1.4999	* 1.5218	* 1.4357	* 1.4903	* 1.2560	* 1.2844	* 1.1760	* 2.3053 *
9	* 1.3066	* 1.5946	* 1.3597	* 1.6316	* 1.4554	* 1.7451	* 1.7360	* 0.8197 *
	* 1.5218	* 1.2483	* 1.4648	* 1.2235	* 1.3725	* 1.1438	* 1.1490	* 2.2214 *
10	* 1.3846	* 1.3563	* 1.5753	* 1.5832	* 1.7199	* 1.7039	* 1.7600	* 0.7815 *
	* 1.4357	* 1.4685	* 1.2693	* 1.2614	* 1.1622	* 1.1724	* 1.1330	* 2.3115 *
11	* 1.3352	* 1.6263	* 1.5766	* 1.6827	* 1.6388	* 1.7186	* 1.7304	* 0.7234 *
	* 1.4903	* 1.2274	* 1.2666	* 1.1901	* 1.2219	* 1.1611	* 1.1498	* 2.4997 *
12	* 1.5887	* 1.4536	* 1.7171	* 1.6384	* 1.6251	* 1.6771	* 0.9929	*
	* 1.2560	* 1.3741	* 1.1640	* 1.2222	* 1.2324	* 1.1899	* 1.8238	*
13	* 1.5537	* 1.7431	* 1.7003	* 1.7157	* 1.6754	* 1.0579	* 0.5429	*
	* 1.2844	* 1.1451	* 1.1749	* 1.1630	* 1.1912	* 1.8818	* 3.3768	*
14	* 1.6951	* 1.7333	* 1.7570	* 1.7272	* 0.9915	* 0.5245	*	*
	* 1.1760	* 1.1507	* 1.1349	* 1.1519	* 1.8262	* 3.4652	*	*
15	* 0.7850	* 0.8192	* 0.7802	* 0.7219	* F-SUB-Q			
	* 2.3053	* 2.2226	* 2.3155	* 2.5046	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 262 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 100% POWER, 4 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1252	* 1.1706	* 1.5099	* 1.2227	* 1.6376	* 1.3424	* 1.6599	* 0.7323
	* 1.7436	* 1.6746	* 1.2971	* 1.6050	* 1.1988	* 1.4649	* 1.1817	* 2.4397
9	* 1.1706	* 1.5322	* 1.1901	* 1.5681	* 1.2908	* 1.5228	* 1.6918	* 0.7629
	* 1.6746	* 1.2798	* 1.6484	* 1.2534	* 1.5237	* 1.2912	* 1.1598	* 2.3561
10	* 1.5099	* 1.1883	* 1.3527	* 1.4288	* 1.6415	* 1.4697	* 1.6727	* 0.7061
	* 1.2971	* 1.6509	* 1.4568	* 1.3775	* 1.1988	* 1.3403	* 1.1731	* 2.5257
11	* 1.2227	* 1.5603	* 1.4231	* 1.6273	* 1.4636	* 1.7174	* 1.5804	* 0.6484
	* 1.6050	* 1.2593	* 1.3830	* 1.2103	* 1.3472	* 1.1440	* 1.2402	* 2.7536
12	* 1.6376	* 1.2887	* 1.6385	* 1.4623	* 1.3623	* 1.5940	* 0.9287	*
	* 1.1988	* 1.5262	* 1.2009	* 1.3484	* 1.4483	* 1.2319	* 1.9235	*
13	* 1.3424	* 1.5210	* 1.4666	* 1.7148	* 1.5921	* 0.9483	* 0.4864	*
	* 1.4649	* 1.2927	* 1.3431	* 1.1457	* 1.2334	* 2.0708	* 3.7239	*
14	* 1.6599	* 1.6896	* 1.6700	* 1.5775	* 0.9265	* 0.4705	*	*
	* 1.1817	* 1.1613	* 1.1750	* 1.2424	* 1.9278	* 3.8169	*	*
15	* 0.7323	* 0.7623	* 0.7049	* 0.6471	* F-SUB-Q			
	* 2.4397	* 2.3581	* 2.5300	* 2.7589	* M-SUB-Q			

AT 100% POWER, 4 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.5000	* 0.5362	* 0.6397	* 0.5657	* 0.6782	* 0.5787	* 0.6323	* 0.3267
	* 3.8893	* 3.6247	* 3.0353	* 3.4389	* 2.8676	* 3.3660	* 3.0761	* 5.4299
9	* 0.5362	* 0.6247	* 0.5484	* 0.6661	* 0.5941	* 0.6157	* 0.6395	* 0.3362
	* 3.6247	* 3.1103	* 3.5472	* 2.9228	* 3.2799	* 3.1635	* 3.0413	* 5.3075
10	* 0.6397	* 0.5470	* 0.5657	* 0.6264	* 0.6945	* 0.6123	* 0.6305	* 0.3159
	* 3.0353	* 3.5561	* 3.4483	* 3.1114	* 2.8053	* 3.1839	* 3.0857	* 5.6055
11	* 0.5657	* 0.6640	* 0.6242	* 0.6896	* 0.6207	* 0.6873	* 0.5925	* 0.2825
	* 3.4389	* 2.9322	* 3.1226	* 2.8280	* 3.1431	* 2.8336	* 3.2817	* 6.2768
12	* 0.6782	* 0.5930	* 0.6932	* 0.6200	* 0.5554	* 0.6062	* 0.4110	*
	* 2.8676	* 3.2860	* 2.8107	* 3.1467	* 3.5152	* 3.2127	* 4.3130	*
13	* 0.5787	* 0.6150	* 0.6111	* 0.6863	* 0.6055	* 0.4279	* 0.2164	*
	* 3.3660	* 3.1670	* 3.1902	* 2.8379	* 3.2164	* 4.5515	* 8.3152	*
14	* 0.6323	* 0.6390	* 0.6295	* 0.5915	* 0.4100	* 0.2128	*	*
	* 3.0761	* 3.0439	* 3.0906	* 3.2877	* 4.3234	* 8.3843	*	*
15	* 0.3267	* 0.3361	* 0.3155	* 0.2820	* F-SUB-Q			
	* 5.4299	* 5.3102	* 5.6134	* 6.2887	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 263 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.5230	* 0.5975	* 0.7087	* 0.6307	* 0.7276	* 0.6175	* 0.6406	* 0.3514
	* 4.1362	* 4.0037	* 3.2261	* 3.4996	* 3.0118	* 3.5433	* 3.4412	* 5.6432
9	* 0.5975	* 0.6810	* 0.6152	* 0.7221	* 0.6522	* 0.6270	* 0.6449	* 0.3612
	* 4.0037	* 3.5082	* 3.7128	* 3.1131	* 3.4255	* 3.5086	* 3.4377	* 5.5408
10	* 0.7087	* 0.6142	* 0.6252	* 0.6737	* 0.7285	* 0.6382	* 0.6302	* 0.3358
	* 3.2261	* 3.7167	* 3.7579	* 3.4073	* 3.1420	* 3.5503	* 3.5373	* 5.9231
11	* 0.6307	* 0.7206	* 0.6722	* 0.7202	* 0.6503	* 0.6852	* 0.5908	* 0.3011
	* 3.4996	* 3.1174	* 3.4147	* 3.3319	* 3.6974	* 3.5149	* 3.9202	* 6.7853
12	* 0.7276	* 0.6511	* 0.7276	* 0.6497	* 0.5484	* 0.5814	* 0.4248	*
	* 3.0118	* 3.4273	* 3.1459	* 3.7010	* 4.1284	* 3.8947	* 5.0826	*
13	* 0.6175	* 0.6267	* 0.6377	* 0.6847	* 0.5810	* 0.4211	* 0.2315	*
	* 3.5433	* 3.5103	* 3.5532	* 3.5173	* 3.8974	* 5.2345	* 9.1937	*
14	* 0.6406	* 0.6447	* 0.6298	* 0.5903	* 0.4242	* 0.2251	*	*
	* 3.4412	* 3.4388	* 3.5394	* 3.9234	* 5.0890	* 9.3710	*	*
15	* 0.3514	* 0.3612	* 0.3356	* 0.3008	* F-SUB-Q			
	* 5.6432	* 5.5418	* 5.9266	* 6.7915	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1713	* 1.2598	* 1.5682	* 1.3076	* 1.6240	* 1.3443	* 1.5626	* 0.7814
	* 2.0280	* 1.9906	* 1.4954	* 1.7394	* 1.3865	* 1.6743	* 1.4504	* 2.6162
9	* 1.2598	* 1.5674	* 1.2771	* 1.5864	* 1.3527	* 1.4564	* 1.5780	* 0.8051
	* 1.9906	* 1.5644	* 1.8395	* 1.4614	* 1.6958	* 1.5522	* 1.4307	* 2.5438
10	* 1.5682	* 1.2752	* 1.4151	* 1.4480	* 1.6016	* 1.4482	* 1.5529	* 0.7448
	* 1.4954	* 1.8427	* 1.6998	* 1.6281	* 1.4829	* 1.6090	* 1.4763	* 2.7427
11	* 1.3076	* 1.5819	* 1.4448	* 1.5933	* 1.4488	* 1.5985	* 1.4623	* 0.6846
	* 1.7394	* 1.4633	* 1.6320	* 1.5575	* 1.7033	* 1.5390	* 1.6473	* 3.0745
12	* 1.6240	* 1.3513	* 1.5999	* 1.4479	* 1.2934	* 1.4726	* 0.9449	*
	* 1.3865	* 1.6965	* 1.4846	* 1.7043	* 1.8011	* 1.6133	* 2.3379	*
13	* 1.3443	* 1.4559	* 1.4473	* 1.5975	* 1.4716	* 0.9375	* 0.5202	*
	* 1.6743	* 1.5528	* 1.6101	* 1.5399	* 1.6144	* 2.4804	* 4.2021	*
14	* 1.5626	* 1.5776	* 1.5521	* 1.4611	* 0.9436	* 0.5052	*	*
	* 1.4504	* 1.4311	* 1.4771	* 1.6487	* 2.3410	* 4.2895	*	*
15	* 0.7814	* 0.8048	* 0.7444	* 0.6840	* F-SUB-Q			
	* 2.6162	* 2.5445	* 2.7443	* 3.0770	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 264 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4125	* 1.4088	* 1.4347	* 1.4316	* 1.5664	* 1.5464	* 1.6009	* 0.8584
	* 1.7797	* 1.7972	* 1.6794	* 1.6216	* 1.4665	* 1.4791	* 1.4241	* 2.3856
9	* 1.4088	* 1.6319	* 1.4550	* 1.6352	* 1.5193	* 1.6740	* 1.6280	* 0.8863
	* 1.7972	* 1.5145	* 1.6530	* 1.4543	* 1.5274	* 1.3735	* 1.4087	* 2.3294
10	* 1.4347	* 1.4529	* 1.6403	* 1.6027	* 1.6566	* 1.6650	* 1.6439	* 0.8386
	* 1.6794	* 1.6604	* 1.4776	* 1.4985	* 1.4254	* 1.4236	* 1.4200	* 2.4821
11	* 1.4316	* 1.6321	* 1.5990	* 1.6501	* 1.6306	* 1.6171	* 1.6113	* 0.7822
	* 1.6216	* 1.4570	* 1.5023	* 1.4892	* 1.5340	* 1.5531	* 1.5243	* 2.7473
12	* 1.5664	* 1.5184	* 1.6554	* 1.6295	* 1.5989	* 1.5843	* 1.0425	*
	* 1.4665	* 1.5280	* 1.4265	* 1.5344	* 1.5380	* 1.5505	* 2.1610	*
13	* 1.5464	* 1.6733	* 1.6642	* 1.6160	* 1.5834	* 1.0879	* 0.5948	*
	* 1.4791	* 1.3739	* 1.4244	* 1.5544	* 1.5514	* 2.2221	* 3.7603	*
14	* 1.6009	* 1.6274	* 1.6431	* 1.6101	* 1.0413	* 0.5821	*	*
	* 1.4241	* 1.4092	* 1.4207	* 1.5256	* 2.1631	* 3.8099	*	*
15	* 0.8584	* 0.8861	* 0.8380	* 0.7815	* F-SUB-Q			
	* 2.3856	* 2.3297	* 2.4836	* 2.7495	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.5006	* 1.4795	* 1.4882	* 1.4637	* 1.6688	* 1.6328	* 1.7128	* 0.8652
	* 1.7152	* 1.7492	* 1.6690	* 1.6188	* 1.4020	* 1.4254	* 1.3519	* 2.4012
9	* 1.4795	* 1.7289	* 1.5230	* 1.7182	* 1.5931	* 1.7901	* 1.7489	* 0.8957
	* 1.7492	* 1.4530	* 1.6163	* 1.4147	* 1.4876	* 1.3041	* 1.3368	* 2.3405
10	* 1.4882	* 1.5200	* 1.7381	* 1.6732	* 1.7684	* 1.7741	* 1.7689	* 0.8543
	* 1.6690	* 1.6244	* 1.4205	* 1.4660	* 1.3626	* 1.3616	* 1.3452	* 2.4944
11	* 1.4637	* 1.7131	* 1.6689	* 1.7540	* 1.7255	* 1.7347	* 1.7258	* 0.8004
	* 1.6188	* 1.4176	* 1.4701	* 1.4305	* 1.4733	* 1.4778	* 1.4534	* 2.7424
12	* 1.6688	* 1.5921	* 1.7670	* 1.7250	* 1.7167	* 1.7046	* 1.0580	*
	* 1.4020	* 1.4881	* 1.3637	* 1.4737	* 1.4669	* 1.4759	* 2.1753	*
13	* 1.6328	* 1.7892	* 1.7732	* 1.7335	* 1.7036	* 1.1410	* 0.6068	*
	* 1.4254	* 1.3045	* 1.3623	* 1.4788	* 1.4767	* 2.1758	* 3.7749	*
14	* 1.7128	* 1.7480	* 1.7680	* 1.7244	* 1.0573	* 0.5935	*	*
	* 1.3519	* 1.3373	* 1.3459	* 1.4547	* 2.1767	* 3.8269	*	*
15	* 0.8652	* 0.8956	* 0.8536	* 0.7996	* F-SUB-Q			
	* 2.4012	* 2.3408	* 2.4963	* 2.7448	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 265 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.5035 *	* 1.4791 *	* 1.4944 *	* 1.4551 *	* 1.6901 *	* 1.6439 *	* 1.7473 *	* 0.8642 *
	* 1.7524 *	* 1.7898 *	* 1.7093 *	* 1.6648 *	* 1.4130 *	* 1.4465 *	* 1.3552 *	* 2.4595 *
9	* 1.4791 *	* 1.7438 *	* 1.5201 *	* 1.7340 *	* 1.5965 *	* 1.8160 *	* 1.7880 *	* 0.8985 *
	* 1.7898 *	* 1.4791 *	* 1.6624 *	* 1.4326 *	* 1.5170 *	* 1.3125 *	* 1.3385 *	* 2.3875 *
10	* 1.4944 *	* 1.5168 *	* 1.7435 *	* 1.6820 *	* 1.7956 *	* 1.7951 *	* 1.8091 *	* 0.8576 *
	* 1.7093 *	* 1.6715 *	* 1.4524 *	* 1.4930 *	* 1.3692 *	* 1.3687 *	* 1.3413 *	* 2.5354 *
11	* 1.4551 *	* 1.7302 *	* 1.6774 *	* 1.7772 *	* 1.7463 *	* 1.7726 *	* 1.7695 *	* 0.8058 *
	* 1.6648 *	* 1.4358 *	* 1.4975 *	* 1.4500 *	* 1.4893 *	* 1.4730 *	* 1.4447 *	* 2.7718 *
12	* 1.6901 *	* 1.5954 *	* 1.7941 *	* 1.7458 *	* 1.7396 *	* 1.7450 *	* 1.0689 *	
	* 1.4130 *	* 1.5175 *	* 1.3703 *	* 1.4897 *	* 1.4828 *	* 1.4765 *	* 2.2052 *	
13	* 1.6439 *	* 1.8150 *	* 1.7941 *	* 1.7712 *	* 1.7439 *	* 1.1591 *	* 0.6083 *	
	* 1.4465 *	* 1.3130 *	* 1.3694 *	* 1.4743 *	* 1.4774 *	* 2.1975 *	* 3.8642 *	
14	* 1.7473 *	* 1.7871 *	* 1.8082 *	* 1.7679 *	* 1.0682 *	* 0.5951 *		
	* 1.3552 *	* 1.3391 *	* 1.3421 *	* 1.4461 *	* 2.2064 *	* 3.9170 *		
15	* 0.8642 *	* 0.8983 *	* 0.8569 *	* 0.8050 *	F-SUB-Q			
	* 2.4595 *	* 2.3879 *	* 2.5376 *	* 2.7743 *	M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4830 *	* 1.4580 *	* 1.4782 *	* 1.4349 *	* 1.6813 *	* 1.6327 *	* 1.7483 *	* 0.8592 *
	* 1.8130 *	* 1.8522 *	* 1.7662 *	* 1.7245 *	* 1.4477 *	* 1.4810 *	* 1.3779 *	* 2.5191 *
9	* 1.4580 *	* 1.7271 *	* 1.4989 *	* 1.7237 *	* 1.5804 *	* 1.8122 *	* 1.7918 *	* 0.8948 *
	* 1.8522 *	* 1.5272 *	* 1.7212 *	* 1.4725 *	* 1.5650 *	* 1.3374 *	* 1.3596 *	* 2.4407 *
10	* 1.4782 *	* 1.4954 *	* 1.7237 *	* 1.6696 *	* 1.7924 *	* 1.7884 *	* 1.8137 *	* 0.8552 *
	* 1.7662 *	* 1.7311 *	* 1.4987 *	* 1.5373 *	* 1.4038 *	* 1.4003 *	* 1.3654 *	* 2.5952 *
11	* 1.4349 *	* 1.7196 *	* 1.6647 *	* 1.7763 *	* 1.7399 *	* 1.7762 *	* 1.7785 *	* 0.8047 *
	* 1.7245 *	* 1.4760 *	* 1.5423 *	* 1.4906 *	* 1.5295 *	* 1.5049 *	* 1.4730 *	* 2.8425 *
12	* 1.6813 *	* 1.5793 *	* 1.7908 *	* 1.7394 *	* 1.7336 *	* 1.7499 *	* 1.0725 *	
	* 1.4477 *	* 1.5656 *	* 1.4051 *	* 1.5299 *	* 1.5245 *	* 1.5096 *	* 2.2502 *	
13	* 1.6327 *	* 1.8111 *	* 1.7872 *	* 1.7747 *	* 1.7488 *	* 1.1606 *	* 0.6068 *	
	* 1.4810 *	* 1.3380 *	* 1.4012 *	* 1.5063 *	* 1.5106 *	* 2.2581 *	* 3.9848 *	
14	* 1.7483 *	* 1.7908 *	* 1.8126 *	* 1.7768 *	* 1.0717 *	* 0.5932 *		
	* 1.3779 *	* 1.3602 *	* 1.3663 *	* 1.4745 *	* 2.2515 *	* 4.0417 *		
15	* 0.8592 *	* 0.8946 *	* 0.8545 *	* 0.8039 *	F-SUB-Q			
	* 2.5191 *	* 2.4411 *	* 2.5975 *	* 2.8453 *	M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 266 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4697 *	* 1.4437 *	* 1.4721 *	* 1.4230 *	* 1.6847 *	* 1.6294 *	* 1.7596 *	* 0.8488 *
	* 1.8666 *	* 1.9057 *	* 1.8269 *	* 1.7915 *	* 1.4866 *	* 1.5211 *	* 1.4062 *	* 2.6174 *
9	* 1.4437 *	* 1.7219 *	* 1.4857 *	* 1.7239 *	* 1.5723 *	* 1.8174 *	* 1.8050 *	* 0.8847 *
	* 1.9057 *	* 1.5776 *	* 1.7883 *	* 1.5171 *	* 1.6206 *	* 1.3706 *	* 1.3882 *	* 2.5341 *
10	* 1.4721 *	* 1.4821 *	* 1.7143 *	* 1.6651 *	* 1.8023 *	* 1.7900 *	* 1.8277 *	* 0.8465 *
	* 1.8269 *	* 1.7992 *	* 1.5525 *	* 1.5892 *	* 1.4423 *	* 1.4382 *	* 1.3948 *	* 2.6997 *
11	* 1.4230 *	* 1.7196 *	* 1.6599 *	* 1.7842 *	* 1.7408 *	* 1.7888 *	* 1.7937 *	* 0.7961 *
	* 1.7915 *	* 1.5209 *	* 1.5947 *	* 1.5262 *	* 1.5626 *	* 1.5183 *	* 1.5067 *	* 2.9636 *
12	* 1.6847 *	* 1.5710 *	* 1.8006 *	* 1.7403 *	* 1.7354 *	* 1.7617 *	* 1.0626 *	
	* 1.4866 *	* 1.6213 *	* 1.4438 *	* 1.5631 *	* 1.5596 *	* 1.5358 *	* 2.3184 *	
13	* 1.6294 *	* 1.8162 *	* 1.7885 *	* 1.7872 *	* 1.7605 *	* 1.1548 *	* 0.5986 *	
	* 1.5211 *	* 1.3713 *	* 1.4393 *	* 1.5197 *	* 1.5369 *	* 2.3248 *	* 4.1389 *	
14	* 1.7596 *	* 1.8037 *	* 1.8264 *	* 1.7919 *	* 1.0619 *	* 0.5843 *		
	* 1.4062 *	* 1.3889 *	* 1.3958 *	* 1.5082 *	* 2.3197 *	* 4.2041 *		
15	* 0.8488 *	* 0.8846 *	* 0.8456 *	* 0.7952 *	* F-SUB-Q			
	* 2.6174 *	* 2.5346 *	* 2.7023 *	* 2.9667 *	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4485 *	* 1.4218 *	* 1.4543 *	* 1.4038 *	* 1.6737 *	* 1.6187 *	* 1.7544 *	* 0.8379 *
	* 1.9342 *	* 1.9772 *	* 1.9201 *	* 1.8859 *	* 1.5530 *	* 1.5868 *	* 1.4618 *	* 2.7467 *
9	* 1.4218 *	* 1.7028 *	* 1.4651 *	* 1.7098 *	* 1.5553 *	* 1.8098 *	* 1.8010 *	* 0.8740 *
	* 1.9772 *	* 1.6551 *	* 1.8840 *	* 1.5890 *	* 1.7015 *	* 1.4275 *	* 1.4433 *	* 2.6581 *
10	* 1.4543 *	* 1.4613 *	* 1.6945 *	* 1.6500 *	* 1.7953 *	* 1.7790 *	* 1.8243 *	* 0.8371 *
	* 1.9201 *	* 1.8958 *	* 1.6320 *	* 1.6669 *	* 1.5069 *	* 1.5000 *	* 1.4503 *	* 2.8331 *
11	* 1.4038 *	* 1.7053 *	* 1.6446 *	* 1.7757 *	* 1.7292 *	* 1.7844 *	* 1.7917 *	* 0.7873 *
	* 1.8859 *	* 1.5932 *	* 1.6727 *	* 1.5636 *	* 1.6045 *	* 1.5564 *	* 1.5433 *	* 3.1130 *
12	* 1.6737 *	* 1.5540 *	* 1.7935 *	* 1.7286 *	* 1.7246 *	* 1.7567 *	* 1.0530 *	
	* 1.5530 *	* 1.7023 *	* 1.5086 *	* 1.6050 *	* 1.6004 *	* 1.5702 *	* 2.3871 *	
13	* 1.6187 *	* 1.8083 *	* 1.7773 *	* 1.7826 *	* 1.7554 *	* 1.1448 *	* 0.5910 *	
	* 1.5868 *	* 1.4283 *	* 1.5013 *	* 1.5579 *	* 1.5714 *	* 2.3975 *	* 4.2745 *	
14	* 1.7544 *	* 1.7997 *	* 1.8229 *	* 1.7897 *	* 1.0523 *	* 0.5762 *		
	* 1.4618 *	* 1.4441 *	* 1.4515 *	* 1.5450 *	* 2.3884 *	* 4.3469 *		
15	* 0.8379 *	* 0.8738 *	* 0.8362 *	* 0.7863 *	* F-SUB-Q			
	* 2.7467 *	* 2.6588 *	* 2.8361 *	* 3.1165 *	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 267 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4311	* 1.4034	* 1.4415	* 1.3880	* 1.6675	* 1.6110	* 1.7528	* 0.8263 *
	* 2.0295	* 2.0722	* 2.0083	* 1.9958	* 1.6301	* 1.6666	* 1.5287	* 2.9085 *
9	* 1.4034	* 1.6893	* 1.4479	* 1.7003	* 1.5416	* 1.8047	* 1.8002	* 0.8609 *
	* 2.0722	* 1.7155	* 1.9949	* 1.6718	* 1.7965	* 1.4962	* 1.5098	* 2.8180 *
10	* 1.4415	* 1.4441	* 1.6792	* 1.6381	* 1.7917	* 1.7718	* 1.8239	* 0.8264 *
	* 2.0083	* 2.0024	* 1.7171	* 1.7550	* 1.5820	* 1.5743	* 1.5169	* 2.9994 *
11	* 1.3880	* 1.6957	* 1.6325	* 1.7709	* 1.7201	* 1.7829	* 1.7913	* 0.7757 *
	* 1.9958	* 1.6764	* 1.7610	* 1.6195	* 1.6668	* 1.6079	* 1.5893	* 3.3035 *
12	* 1.6675	* 1.5402	* 1.7897	* 1.7196	* 1.7162	* 1.7542	* 1.0399	*
	* 1.6301	* 1.7974	* 1.5839	* 1.6673	* 1.6643	* 1.6245	* 2.4950	*
13	* 1.6110	* 1.8031	* 1.7700	* 1.7810	* 1.7528	* 1.1324	* 0.5823	*
	* 1.6666	* 1.4972	* 1.5759	* 1.6096	* 1.6257	* 2.5031	* 4.4725	*
14	* 1.7527	* 1.7986	* 1.8222	* 1.7891	* 1.0392	* 0.5671	*	*
	* 1.5287	* 1.5107	* 1.5182	* 1.5912	* 2.4964	* 4.5539	*	*
15	* 0.8263	* 0.8606	* 0.8255	* 0.7747	* F-SUB-Q			
	* 2.9084	* 2.8188	* 3.0027	* 3.3074	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3930	* 1.3656	* 1.3992	* 1.3529	* 1.6249	* 1.5788	* 1.7128	* 0.8177 *
	* 2.1633	* 2.2038	* 2.1376	* 2.1568	* 1.7619	* 1.7908	* 1.6464	* 3.0920 *
9	* 1.3656	* 1.6409	* 1.4106	* 1.6565	* 1.5062	* 1.7684	* 1.7609	* 0.8543 *
	* 2.2038	* 1.8242	* 2.1210	* 1.7944	* 1.9383	* 1.6075	* 1.6248	* 2.9867 *
10	* 1.3992	* 1.4068	* 1.6377	* 1.6009	* 1.7509	* 1.7363	* 1.7839	* 0.8190 *
	* 2.1376	* 2.1267	* 1.8221	* 1.8590	* 1.6918	* 1.6923	* 1.6329	* 3.1847 *
11	* 1.3529	* 1.6519	* 1.5952	* 1.7296	* 1.6834	* 1.7424	* 1.7536	* 0.7708 *
	* 2.1568	* 1.7993	* 1.8655	* 1.7225	* 1.7694	* 1.6964	* 1.6756	* 3.4452 *
12	* 1.6249	* 1.5048	* 1.7488	* 1.6829	* 1.6801	* 1.7152	* 1.0364	*
	* 1.7619	* 1.9392	* 1.6937	* 1.7699	* 1.7725	* 1.7302	* 2.5933	*
13	* 1.5788	* 1.7666	* 1.7343	* 1.7404	* 1.7138	* 1.1201	* 0.5788	*
	* 1.7908	* 1.6086	* 1.6942	* 1.6984	* 1.7316	* 2.6380	* 4.6836	*
14	* 1.7128	* 1.7592	* 1.7821	* 1.7514	* 1.0355	* 0.5638	*	*
	* 1.6464	* 1.6259	* 1.6345	* 1.6776	* 2.5952	* 4.7674	*	*
15	* 0.8177	* 0.8541	* 0.8180	* 0.7697	* F-SUB-Q			
	* 3.0920	* 2.9876	* 3.1881	* 3.4496	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 268 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3845 *	* 1.3557 *	* 1.3984 *	* 1.3449 *	* 1.6323 *	* 1.5797 *	* 1.7249 *	* 0.8027 *
	* 2.2627 *	* 2.3089 *	* 2.2287 *	* 2.2946 *	* 1.8556 *	* 1.8939 *	* 1.7288 *	* 3.3266 *
9	* 1.3557 *	* 1.6418 *	* 1.4022 *	* 1.6601 *	* 1.5003 *	* 1.7743 *	* 1.7734 *	* 0.8377 *
	* 2.3089 *	* 1.8997 *	* 2.2250 *	* 1.8683 *	* 2.0590 *	* 1.6949 *	* 1.7069 *	* 3.2172 *
10	* 1.3984 *	* 1.3983 *	* 1.6330 *	* 1.5984 *	* 1.7600 *	* 1.7404 *	* 1.7973 *	* 0.8045 *
	* 2.2287 *	* 2.2312 *	* 1.9058 *	* 1.9422 *	* 1.7522 *	* 1.7632 *	* 1.7023 *	* 3.4223 *
11	* 1.3449 *	* 1.6553 *	* 1.5925 *	* 1.7376 *	* 1.6837 *	* 1.7544 *	* 1.7651 *	* 0.7557 *
	* 2.2946 *	* 1.8735 *	* 1.9492 *	* 1.7802 *	* 1.8376 *	* 1.7542 *	* 1.7338 *	* 3.6617 *
12	* 1.6323 *	* 1.4988 *	* 1.7578 *	* 1.6832 *	* 1.6811 *	* 1.7246 *	* 1.0153 *	
	* 1.8556 *	* 2.0604 *	* 1.7543 *	* 1.8381 *	* 1.8377 *	* 1.7849 *	* 2.7483 *	
13	* 1.5797 *	* 1.7723 *	* 1.7381 *	* 1.7522 *	* 1.7232 *	* 1.1056 *	* 0.5659 *	
	* 1.8939 *	* 1.6962 *	* 1.7654 *	* 1.7563 *	* 1.7863 *	* 2.7744 *	* 4.9566 *	
14	* 1.7249 *	* 1.7716 *	* 1.7953 *	* 1.7627 *	* 1.0145 *	* 0.5501 *		
	* 1.7288 *	* 1.7081 *	* 1.7041 *	* 1.7361 *	* 2.7500 *	* 5.0549 *		
15	* 0.8027 *	* 0.8374 *	* 0.8035 *	* 0.7545 *	* F-SUB-Q			
	* 3.3266 *	* 3.2182 *	* 3.4265 *	* 3.6666 *	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3619 *	* 1.3328 *	* 1.3775 *	* 1.3237 *	* 1.6147 *	* 1.5635 *	* 1.7104 *	* 0.7909 *
	* 2.3700 *	* 2.4139 *	* 2.3233 *	* 2.4100 *	* 1.9779 *	* 2.0297 *	* 1.8483 *	* 3.5750 *
9	* 1.3328 *	* 1.6185 *	* 1.3799 *	* 1.6398 *	* 1.4795 *	* 1.7582 *	* 1.7592 *	* 0.8262 *
	* 2.4139 *	* 1.9830 *	* 2.3231 *	* 1.9564 *	* 2.1643 *	* 1.8131 *	* 1.8236 *	* 3.4535 *
10	* 1.3775 *	* 1.3759 *	* 1.6098 *	* 1.5786 *	* 1.7434 *	* 1.7238 *	* 1.7831 *	* 0.7936 *
	* 2.3233 *	* 2.3297 *	* 1.9983 *	* 2.0359 *	* 1.8515 *	* 1.8653 *	* 1.8000 *	* 3.6456 *
11	* 1.3237 *	* 1.6349 *	* 1.5726 *	* 1.7201 *	* 1.6648 *	* 1.7395 *	* 1.7515 *	* 0.7455 *
	* 2.4100 *	* 1.9622 *	* 2.0435 *	* 1.8840 *	* 1.9476 *	* 1.8556 *	* 1.8332 *	* 3.8880 *
12	* 1.6147 *	* 1.4779 *	* 1.7411 *	* 1.6643 *	* 1.6628 *	* 1.7093 *	* 1.0027 *	
	* 1.9779 *	* 2.1665 *	* 1.8540 *	* 1.9482 *	* 1.9460 *	* 1.8859 *	* 2.9144 *	
13	* 1.5635 *	* 1.7566 *	* 1.7213 *	* 1.7372 *	* 1.7078 *	* 1.0919 *	* 0.5577 *	
	* 2.0297 *	* 1.8146 *	* 1.8679 *	* 1.8579 *	* 1.8874 *	* 2.9374 *	* 5.2542 *	
14	* 1.7104 *	* 1.7572 *	* 1.7810 *	* 1.7489 *	* 1.0019 *	* 0.5417 *		
	* 1.8483 *	* 1.8256 *	* 1.8020 *	* 1.8357 *	* 2.9162 *	* 5.3629 *		
15	* 0.7909 *	* 0.8258 *	* 0.7924 *	* 0.7443 *	* F-SUB-Q			
	* 3.5750 *	* 3.4547 *	* 3.6503 *	* 3.8935 *	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 269 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3273	* 1.2985	* 1.3395	* 1.2913	* 1.5756	* 1.5331	* 1.6735	* 0.7809 *
	* 2.3634	* 2.4077	* 2.3217	* 2.3998	* 1.9696	* 2.0246	* 1.8559	* 3.5935 *
9	* 1.2985	* 1.5750	* 1.3456	* 1.5995	* 1.4464	* 1.7245	* 1.7227	* 0.8175 *
	* 2.4077	* 1.9806	* 2.3148	* 1.9500	* 2.1519	* 1.8054	* 1.8111	* 3.4576 *
10	* 1.3395	* 1.3417	* 1.5714	* 1.5437	* 1.7052	* 1.6899	* 1.7459	* 0.7845 *
	* 2.3217	* 2.3215	* 1.9905	* 2.0243	* 1.8423	* 1.8505	* 1.7891	* 3.5976 *
11	* 1.2913	* 1.5946	* 1.5377	* 1.6816	* 1.6300	* 1.7020	* 1.7159	* 0.7377 *
	* 2.3998	* 1.9559	* 2.0321	* 1.8804	* 1.9410	* 1.8465	* 1.8288	* 3.8431 *
12	* 1.5756	* 1.4448	* 1.7028	* 1.6295	* 1.6288	* 1.6726	* 0.9959	*
	* 1.9696	* 2.1542	* 1.8449	* 1.9416	* 1.9502	* 1.8927	* 2.8758	*
13	* 1.5331	* 1.7229	* 1.6873	* 1.6996	* 1.6710	* 1.0779	* 0.5525	*
	* 2.0246	* 1.8071	* 1.8534	* 1.8491	* 1.8945	* 2.9357	* 5.2473	*
14	* 1.6735	* 1.7205	* 1.7436	* 1.7132	* 0.9948	* 0.5368	*	
	* 1.8559	* 1.8133	* 1.7914	* 1.8316	* 2.8784	* 5.3549	*	
15	* 0.7809	* 0.8171	* 0.7834	* 0.7364	* F-SUB-Q			
	* 3.5935	* 3.4591	* 3.6028	* 3.8493	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3167	* 1.2868	* 1.3355	* 1.2805	* 1.5785	* 1.5303	* 1.6811	* 0.7648 *
	* 2.2965	* 2.3349	* 2.2313	* 2.3227	* 1.8930	* 1.9481	* 1.7754	* 3.4964 *
9	* 1.2868	* 1.5723	* 1.3350	* 1.5987	* 1.4367	* 1.7263	* 1.7305	* 0.7996 *
	* 2.3349	* 1.9089	* 2.2443	* 1.8825	* 2.0891	* 1.7408	* 1.7421	* 3.3730 *
10	* 1.3355	* 1.3309	* 1.5631	* 1.5378	* 1.7096	* 1.6898	* 1.7546	* 0.7692 *
	* 2.2313	* 2.2508	* 1.9333	* 1.9634	* 1.7835	* 1.7910	* 1.7216	* 3.5233 *
11	* 1.2805	* 1.5936	* 1.5315	* 1.6850	* 1.6261	* 1.7095	* 1.7228	* 0.7216 *
	* 2.3227	* 1.8882	* 1.9712	* 1.8251	* 1.8928	* 1.7853	* 1.7675	* 3.7761 *
12	* 1.5785	* 1.4351	* 1.7071	* 1.6256	* 1.6258	* 1.6773	* 0.9738	*
	* 1.8930	* 2.0914	* 1.7860	* 1.8934	* 1.9018	* 1.8354	* 2.8432	*
13	* 1.5303	* 1.7245	* 1.6869	* 1.7069	* 1.6757	* 1.0616	* 0.5392	*
	* 1.9481	* 1.7425	* 1.7940	* 1.7879	* 1.8371	* 2.8832	* 5.1379	*
14	* 1.6811	* 1.7282	* 1.7521	* 1.7199	* 0.9729	* 0.5228	*	
	* 1.7754	* 1.7443	* 1.7239	* 1.7703	* 2.8453	* 5.2528	*	
15	* 0.7648	* 0.7992	* 0.7680	* 0.7203	* F-SUB-Q			
	* 3.4964	* 3.3745	* 3.5287	* 3.7825	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 270 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2972	* 1.2668	* 1.3180	* 1.2616	* 1.5639	* 1.5165	* 1.6701	* 0.7517
	* 2.1155	* 2.1535	* 2.0580	* 2.1535	* 1.7546	* 1.8116	* 1.6468	* 3.2626
9	* 1.2668	* 1.5533	* 1.3156	* 1.5817	* 1.4177	* 1.7133	* 1.7199	* 0.7859
	* 2.1535	* 1.7580	* 2.0728	* 1.7392	* 1.9424	* 1.6176	* 1.6144	* 3.1458
10	* 1.3180	* 1.3114	* 1.5428	* 1.5201	* 1.6960	* 1.6757	* 1.7442	* 0.7568
	* 2.0580	* 2.0789	* 1.7889	* 1.8158	* 1.6453	* 1.6631	* 1.5940	* 3.2714
11	* 1.2616	* 1.5765	* 1.5138	* 1.6705	* 1.6092	* 1.6984	* 1.7121	* 0.7086
	* 2.1535	* 1.7445	* 1.8229	* 1.6827	* 1.7497	* 1.6462	* 1.6282	* 3.5064
12	* 1.5639	* 1.4160	* 1.6934	* 1.6088	* 1.6100	* 1.6646	* 0.9584	*
	* 1.7546	* 1.9445	* 1.6477	* 1.7501	* 1.7602	* 1.6906	* 2.6302	*
13	* 1.5165	* 1.7114	* 1.6725	* 1.6957	* 1.6630	* 1.0458	* 0.5293	*
	* 1.8116	* 1.6193	* 1.6659	* 1.6487	* 1.6922	* 2.6678	* 4.7748	*
14	* 1.6701	* 1.7174	* 1.7415	* 1.7091	* 0.9576	* 0.5127	*	*
	* 1.6468	* 1.6165	* 1.5961	* 1.6308	* 2.6321	* 4.8869	*	*
15	* 0.7517	* 0.7855	* 0.7555	* 0.7072	* F-SUB-Q			
	* 3.2626	* 3.1473	* 3.2765	* 3.5126	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2751	* 1.2445	* 1.2962	* 1.2402	* 1.5423	* 1.4971	* 1.6503	* 0.7414
	* 1.9737	* 2.0111	* 1.9233	* 2.0119	* 1.6308	* 1.6833	* 1.5291	* 3.0402
9	* 1.2445	* 1.5286	* 1.2934	* 1.5587	* 1.3956	* 1.6935	* 1.7001	* 0.7762
	* 2.0111	* 1.6408	* 1.9371	* 1.6229	* 1.8143	* 1.4996	* 1.4996	* 2.9263
10	* 1.2962	* 1.2892	* 1.5186	* 1.4983	* 1.6747	* 1.6550	* 1.7243	* 0.7471
	* 1.9233	* 1.9430	* 1.6696	* 1.6930	* 1.5302	* 1.5478	* 1.4825	* 3.0484
11	* 1.2402	* 1.5535	* 1.4919	* 1.6489	* 1.5875	* 1.6782	* 1.6924	* 0.7008
	* 2.0119	* 1.6280	* 1.6998	* 1.5639	* 1.6267	* 1.5293	* 1.5121	* 3.2617
12	* 1.5423	* 1.3938	* 1.6720	* 1.5870	* 1.5884	* 1.6441	* 0.9478	*
	* 1.6308	* 1.8164	* 1.5325	* 1.6272	* 1.6355	* 1.5690	* 2.4406	*
13	* 1.4971	* 1.6915	* 1.6517	* 1.6754	* 1.6424	* 1.0336	* 0.5225	*
	* 1.6833	* 1.5012	* 1.5507	* 1.5317	* 1.5705	* 2.4747	* 4.4396	*
14	* 1.6503	* 1.6975	* 1.7215	* 1.6894	* 0.9469	* 0.5059	*	*
	* 1.5291	* 1.5014	* 1.4847	* 1.5147	* 2.4426	* 4.5452	*	*
15	* 0.7414	* 0.7758	* 0.7458	* 0.6994	* F-SUB-Q			
	* 3.0402	* 2.9278	* 3.0535	* 3.2677	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 271 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2484	* 1.2183	* 1.2664	* 1.2148	* 1.5095	* 1.4711	* 1.6181	* 0.7341 *
	* 2.0129	* 2.0524	* 1.9678	* 2.0477	* 1.6631	* 1.7105	* 1.5573	* 3.0722 *
9	* 1.2183	* 1.4939	* 1.2666	* 1.5255	* 1.3685	* 1.6643	* 1.6678	* 0.7704 *
	* 2.0524	* 1.6776	* 1.9753	* 1.6550	* 1.8425	* 1.5219	* 1.5235	* 2.9493 *
10	* 1.2664	* 1.2625	* 1.4877	* 1.4698	* 1.6412	* 1.6255	* 1.6913	* 0.7402 *
	* 1.9678	* 1.9814	* 1.7027	* 1.7235	* 1.5615	* 1.5699	* 1.5052	* 3.0664 *
11	* 1.2148	* 1.5203	* 1.4633	* 1.6154	* 1.5576	* 1.6453	* 1.6609	* 0.6951 *
	* 2.0477	* 1.6604	* 1.7307	* 1.5946	* 1.6555	* 1.5590	* 1.5398	* 3.2854 *
12	* 1.5095	* 1.3667	* 1.6385	* 1.5572	* 1.5589	* 1.6119	* 0.9429 *	
	* 1.6631	* 1.8447	* 1.5639	* 1.6560	* 1.6632	* 1.5974	* 2.4525 *	
13	* 1.4711	* 1.6623	* 1.6222	* 1.6425	* 1.6102	* 1.0224	* 0.5186 *	
	* 1.7105	* 1.5236	* 1.5730	* 1.5615	* 1.5990	* 2.4977	* 4.4740 *	
14	* 1.6181	* 1.6652	* 1.6884	* 1.6578	* 0.9418	* 0.5024 *		
	* 1.5573	* 1.5256	* 1.5075	* 1.5425	* 2.4549	* 4.5783 *		
15	* 0.7341	* 0.7699	* 0.7389	* 0.6936	* F-SUB-Q			
	* 3.0722	* 2.9509	* 3.0716	* 3.2917	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2467	* 1.2154	* 1.2715	* 1.2117	* 1.5201	* 1.4737	* 1.6318	* 0.7205 *
	* 1.8640	* 1.9076	* 1.8204	* 1.9129	* 1.5399	* 1.5922	* 1.4403	* 2.9247 *
9	* 1.2154	* 1.5017	* 1.2646	* 1.5334	* 1.3658	* 1.6723	* 1.6814	* 0.7545 *
	* 1.9076	* 1.5496	* 1.8375	* 1.5316	* 1.7187	* 1.4115	* 1.4065	* 2.8129 *
10	* 1.2715	* 1.2603	* 1.4884	* 1.4717	* 1.6519	* 1.6308	* 1.7057	* 0.7268 *
	* 1.8204	* 1.8434	* 1.5805	* 1.5993	* 1.4406	* 1.4547	* 1.3882	* 2.9098 *
11	* 1.2117	* 1.5280	* 1.4651	* 1.6254	* 1.5599	* 1.6586	* 1.6723	* 0.6796 *
	* 1.9129	* 1.5367	* 1.6061	* 1.4738	* 1.5368	* 1.4353	* 1.4192	* 3.1235 *
12	* 1.5201	* 1.3640	* 1.6491	* 1.5595	* 1.5615	* 1.6218	* 0.9223 *	
	* 1.5399	* 1.7207	* 1.4429	* 1.5373	* 1.5399	* 1.4759	* 2.3327 *	
13	* 1.4737	* 1.6701	* 1.6273	* 1.6557	* 1.6201	* 1.0078	* 0.5065 *	
	* 1.5922	* 1.4131	* 1.4577	* 1.4377	* 1.4774	* 2.3567	* 4.2676 *	
14	* 1.6318	* 1.6787	* 1.7027	* 1.6691	* 0.9214	* 0.4896 *		
	* 1.4403	* 1.4087	* 1.3904	* 1.4218	* 2.3345	* 4.3762 *		
15	* 0.7205	* 0.7541	* 0.7254	* 0.6782	* F-SUB-Q			
	* 2.9247	* 2.8144	* 2.9149	* 3.1296	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 272 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2358	* 1.2039	* 1.2605	* 1.2004	* 1.5089	* 1.4629	* 1.6204	* 0.7121
	* 1.7580	* 1.8042	* 1.7255	* 1.8179	* 1.4605	* 1.5101	* 1.3654	* 2.7913
9	* 1.2039	* 1.4898	* 1.2537	* 1.5214	* 1.3537	* 1.6617	* 1.6697	* 0.7459
	* 1.8042	* 1.4665	* 1.7414	* 1.4512	* 1.6310	* 1.3361	* 1.3315	* 2.6831
10	* 1.2605	* 1.2494	* 1.4771	* 1.4606	* 1.6390	* 1.6190	* 1.6936	* 0.7183
	* 1.7255	* 1.7471	* 1.4957	* 1.5135	* 1.3613	* 1.3763	* 1.3134	* 2.7716
11	* 1.2004	* 1.5160	* 1.4540	* 1.6129	* 1.5474	* 1.6460	* 1.6585	* 0.6712
	* 1.8179	* 1.4561	* 1.5201	* 1.3889	* 1.4484	* 1.3552	* 1.3412	* 2.9730
12	* 1.5089	* 1.3520	* 1.6361	* 1.5469	* 1.5488	* 1.6081	* 0.9115	*
	* 1.4605	* 1.6330	* 1.3635	* 1.4488	* 1.4489	* 1.3909	* 2.2097	*
13	* 1.4629	* 1.6596	* 1.6154	* 1.6431	* 1.6064	* 0.9966	* 0.5000	*
	* 1.5101	* 1.3377	* 1.3792	* 1.3575	* 1.3923	* 2.2278	* 4.0464	*
14	* 1.6204	* 1.6669	* 1.6906	* 1.6552	* 0.9105	* 0.4832	*	
	* 1.3654	* 1.3336	* 1.3156	* 1.3437	* 2.2115	* 4.1510	*	
15	* 0.7121	* 0.7455	* 0.7169	* 0.6698	* F-SUB-Q			
	* 2.7913	* 2.6847	* 2.7766	* 2.9790	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2131	* 1.1819	* 1.2297	* 1.1796	* 1.4706	* 1.4352	* 1.5773	* 0.7093
	* 1.6979	* 1.7434	* 1.6801	* 1.7588	* 1.4243	* 1.4627	* 1.3328	* 2.6682
9	* 1.1819	* 1.4533	* 1.2319	* 1.4847	* 1.3305	* 1.6279	* 1.6258	* 0.7448
	* 1.7434	* 1.4271	* 1.6829	* 1.4123	* 1.5765	* 1.2949	* 1.2978	* 2.5582
10	* 1.2297	* 1.2277	* 1.4509	* 1.4337	* 1.5964	* 1.5863	* 1.6483	* 0.7148
	* 1.6801	* 1.6884	* 1.4450	* 1.4634	* 1.3249	* 1.3325	* 1.2802	* 2.6481
11	* 1.1796	* 1.4794	* 1.4272	* 1.5723	* 1.5170	* 1.6009	* 1.6125	* 0.6699
	* 1.7588	* 1.4171	* 1.4698	* 1.3489	* 1.3985	* 1.3200	* 1.3069	* 2.8302
12	* 1.4706	* 1.3287	* 1.5936	* 1.5165	* 1.5174	* 1.5648	* 0.9107	*
	* 1.4243	* 1.5784	* 1.3270	* 1.3988	* 1.3987	* 1.3521	* 2.0955	*
13	* 1.4352	* 1.6258	* 1.5827	* 1.5980	* 1.5631	* 0.9874	* 0.4995	*
	* 1.4627	* 1.2965	* 1.3353	* 1.3223	* 1.3535	* 2.1273	* 3.8392	*
14	* 1.5773	* 1.6231	* 1.6453	* 1.6093	* 0.9095	* 0.4835	*	
	* 1.3328	* 1.2999	* 1.2824	* 1.3093	* 2.0978	* 3.9322	*	
15	* 0.7093	* 0.7443	* 0.7135	* 0.6684	* F-SUB-Q			
	* 2.6682	* 2.5596	* 2.6528	* 2.8359	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 273 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2118	* 1.1813	* 1.2335	* 1.1858	* 1.4697	* 1.4331	* 1.5720	* 0.7000
	* 1.6292	* 1.6722	* 1.6065	* 1.6783	* 1.3666	* 1.4042	* 1.2818	* 2.5963
9	* 1.1813	* 1.4535	* 1.2339	* 1.4857	* 1.3315	* 1.6245	* 1.6186	* 0.7331
	* 1.6722	* 1.3678	* 1.6110	* 1.3528	* 1.5102	* 1.2429	* 1.2486	* 2.4958
10	* 1.2335	* 1.2298	* 1.4535	* 1.4367	* 1.5912	* 1.5837	* 1.6412	* 0.7036
	* 1.6065	* 1.6162	* 1.3822	* 1.3991	* 1.2724	* 1.2777	* 1.2310	* 2.5818
11	* 1.1858	* 1.4806	* 1.4303	* 1.5674	* 1.5154	* 1.5950	* 1.6011	* 0.6567
	* 1.6783	* 1.3573	* 1.4052	* 1.2947	* 1.3389	* 1.2675	* 1.2593	* 2.7693
12	* 1.4697	* 1.3298	* 1.5884	* 1.5150	* 1.5148	* 1.5559	* 0.8915	*
	* 1.3666	* 1.5120	* 1.2745	* 1.3393	* 1.3398	* 1.3004	* 2.0499	*
13	* 1.4331	* 1.6224	* 1.5801	* 1.5921	* 1.5542	* 0.9699	* 0.4897	*
	* 1.4042	* 1.2444	* 1.2804	* 1.2697	* 1.3017	* 2.0725	* 3.7534	*
14	* 1.5720	* 1.6159	* 1.6383	* 1.5980	* 0.8903	* 0.4734	*	
	* 1.2818	* 1.2505	* 1.2331	* 1.2616	* 2.0521	* 3.8494	*	
15	* 0.7000	* 0.7327	* 0.7023	* 0.6553	* F-SUB-Q			
	* 2.5963	* 2.4972	* 2.5864	* 2.7749	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1618	* 1.1457	* 1.2184	* 1.1803	* 1.4146	* 1.3859	* 1.5145	* 0.6963
	* 1.6445	* 1.6682	* 1.5729	* 1.6309	* 1.3727	* 1.4037	* 1.2856	* 2.5280
9	* 1.1457	* 1.4061	* 1.1982	* 1.4520	* 1.2960	* 1.5601	* 1.5537	* 0.7275
	* 1.6682	* 1.3672	* 1.6040	* 1.3378	* 1.5002	* 1.2499	* 1.2563	* 2.4358
10	* 1.2184	* 1.1951	* 1.3998	* 1.4087	* 1.5385	* 1.5246	* 1.5746	* 0.6936
	* 1.5729	* 1.6080	* 1.3876	* 1.3789	* 1.2706	* 1.2815	* 1.2391	* 2.5362
11	* 1.1803	* 1.4472	* 1.4026	* 1.5058	* 1.4663	* 1.5369	* 1.5453	* 0.6417
	* 1.6309	* 1.3421	* 1.3847	* 1.3011	* 1.3357	* 1.2699	* 1.2591	* 2.7448
12	* 1.4146	* 1.2943	* 1.5359	* 1.4659	* 1.4538	* 1.4989	* 0.8829	*
	* 1.3727	* 1.5020	* 1.2727	* 1.3360	* 1.3476	* 1.3028	* 2.0010	*
13	* 1.3859	* 1.5580	* 1.5213	* 1.5343	* 1.4973	* 0.9411	* 0.4792	*
	* 1.4037	* 1.2514	* 1.2842	* 1.2721	* 1.3042	* 2.0646	* 3.7160	*
14	* 1.5145	* 1.5512	* 1.5718	* 1.5423	* 0.8816	* 0.4629	*	
	* 1.2856	* 1.2582	* 1.2412	* 1.2614	* 2.0036	* 3.8134	*	
15	* 0.6963	* 0.7271	* 0.6924	* 0.6403	* F-SUB-Q			
	* 2.5280	* 2.4371	* 2.5406	* 2.7503	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 274 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 75% POWER, 4 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9744	* 1.0159	* 1.3146	* 1.0683	* 1.4374	* 1.1821	* 1.4631	* 0.6426
	* 1.9108	* 1.8342	* 1.4199	* 1.7556	* 1.3105	* 1.6013	* 1.2924	* 2.6738
9	* 1.0159	* 1.3349	* 1.0376	* 1.3757	* 1.1328	* 1.3429	* 1.4929	* 0.6698
	* 1.8342	* 1.4011	* 1.8049	* 1.3705	* 1.6658	* 1.4113	* 1.2686	* 2.5824
10	* 1.3146	* 1.0330	* 1.1868	* 1.2552	* 1.4490	* 1.2971	* 1.4763	* 0.6199
	* 1.4199	* 1.8076	* 1.5925	* 1.5056	* 1.3103	* 1.4647	* 1.2834	* 2.7696
11	* 1.0683	* 1.3690	* 1.2501	* 1.4362	* 1.2918	* 1.5149	* 1.3933	* 0.5690
	* 1.7556	* 1.3770	* 1.5116	* 1.3228	* 1.4722	* 1.2513	* 1.3580	* 3.0214
12	* 1.4374	* 1.1308	* 1.4464	* 1.2906	* 1.2027	* 1.4053	* 0.8165	
	* 1.3105	* 1.6686	* 1.3126	* 1.4735	* 1.5837	* 1.3489	* 2.1089	
13	* 1.1821	* 1.3413	* 1.2943	* 1.5125	* 1.4035	* 0.8339	* 0.4250	
	* 1.6013	* 1.4130	* 1.4677	* 1.2532	* 1.3505	* 2.2704	* 4.0931	
14	* 1.4631	* 1.4909	* 1.4738	* 1.3906	* 0.8145	* 0.4111	*	
	* 1.2924	* 1.2703	* 1.2855	* 1.3605	* 2.1137	* 4.1953	*	
15	* 0.6426	* 0.6692	* 0.6188	* 0.5678	* F-SUB-Q			
	* 2.6738	* 2.5846	* 2.7744	* 3.0273	* M-SUB-Q			

AT 75% POWER, 4 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.4258	* 0.4575	* 0.5465	* 0.4857	* 0.5837	* 0.4994	* 0.5467	* 0.2820
	* 4.2698	* 3.9774	* 3.3294	* 3.7688	* 3.1416	* 3.6872	* 3.3714	* 5.9593
9	* 0.4575	* 0.5333	* 0.4696	* 0.5734	* 0.5123	* 0.5326	* 0.5533	* 0.2903
	* 3.9774	* 3.4126	* 3.8895	* 3.2023	* 3.5930	* 3.4658	* 3.3334	* 5.8248
10	* 0.5465	* 0.4684	* 0.4869	* 0.5402	* 0.6003	* 0.5299	* 0.5457	* 0.2729
	* 3.3294	* 3.8993	* 3.7784	* 3.4083	* 3.0729	* 3.4877	* 3.3830	* 6.1536
11	* 0.4857	* 0.5715	* 0.5382	* 0.5960	* 0.5372	* 0.5949	* 0.5125	* 0.2439
	* 3.7688	* 3.2126	* 3.4206	* 3.0977	* 3.4428	* 3.1057	* 3.6005	* 6.8955
12	* 0.5837	* 0.5113	* 0.5991	* 0.5365	* 0.4812	* 0.5243	* 0.3551	
	* 3.1416	* 3.5997	* 3.0788	* 3.4468	* 3.8513	* 3.5245	* 4.7360	
13	* 0.4994	* 0.5320	* 0.5289	* 0.5940	* 0.5237	* 0.3697	* 0.1863	
	* 3.6872	* 3.4697	* 3.4946	* 3.1105	* 3.5287	* 4.9983	* 9.1467	
14	* 0.5467	* 0.5527	* 0.5448	* 0.5115	* 0.3542	* 0.1832	*	
	* 3.3714	* 3.3363	* 3.3885	* 3.6071	* 4.7475	* 9.2227	*	
15	* 0.2820	* 0.2902	* 0.2725	* 0.2434	* F-SUB-Q			
	* 5.9593	* 5.8278	* 6.1623	* 6.9087	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 275 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.5420	* 0.6202	* 0.7394	* 0.6619	* 0.7719	* 0.6564	* 0.6898	* 0.3694
	* 4.8989	* 4.8236	* 3.8514	* 4.1494	* 3.5265	* 4.1457	* 3.9537	* 6.6582
9	* 0.6202	* 0.7137	* 0.6416	* 0.7657	* 0.6903	* 0.6748	* 0.6958	* 0.3800
	* 4.8236	* 4.1837	* 4.4399	* 3.6707	* 4.0399	* 4.0761	* 3.9447	* 6.5329
10	* 0.7394	* 0.6403	* 0.6620	* 0.7158	* 0.7784	* 0.6857	* 0.6816	* 0.3534
	* 3.8514	* 4.4479	* 4.4138	* 4.0066	* 3.6781	* 4.1268	* 4.0815	* 7.0291
11	* 0.6619	* 0.7640	* 0.7141	* 0.7699	* 0.6941	* 0.7414	* 0.6372	* 0.3162
	* 4.1494	* 3.6769	* 4.0161	* 3.8636	* 4.2714	* 3.9700	* 4.5555	* 8.0993
12	* 0.7719	* 0.6891	* 0.7774	* 0.6934	* 0.5877	* 0.6259	* 0.4501	*
	* 3.5265	* 4.0424	* 3.6835	* 4.2743	* 4.6987	* 4.4088	* 5.8482	*
13	* 0.6564	* 0.6745	* 0.6850	* 0.7408	* 0.6253	* 0.4462	* 0.2407	*
	* 4.1457	* 4.0785	* 4.1310	* 3.9734	* 4.4123	* 6.0123	* 10.7418	*
14	* 0.6898	* 0.6956	* 0.6811	* 0.6366	* 0.4494	* 0.2341	*	*
	* 3.9537	* 3.9462	* 4.0847	* 4.5601	* 5.8565	* 10.9520	*	*
15	* 0.3694	* 0.3799	* 0.3532	* 0.3159	* F-SUB-Q			
	* 6.6582	* 6.5344	* 7.0342	* 8.1079	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2508	* 1.3471	* 1.6857	* 1.4151	* 1.7854	* 1.4812	* 1.7363	* 0.8439
	* 2.3571	* 2.3151	* 1.7478	* 2.0150	* 1.5794	* 1.9032	* 1.6307	* 3.0267
9	* 1.3471	* 1.6961	* 1.3773	* 1.7335	* 1.4797	* 1.6248	* 1.7596	* 0.8708
	* 2.3151	* 1.8221	* 2.1497	* 1.6822	* 1.9479	* 1.7443	* 1.6104	* 2.9546
10	* 1.6857	* 1.3715	* 1.5505	* 1.5903	* 1.7704	* 1.6125	* 1.7339	* 0.8059
	* 1.7478	* 2.1541	* 1.9554	* 1.8685	* 1.6945	* 1.8186	* 1.6631	* 3.1910
11	* 1.4151	* 1.7279	* 1.5862	* 1.7595	* 1.6076	* 1.7848	* 1.6265	* 0.7386
	* 2.0150	* 1.6848	* 1.8735	* 1.7483	* 1.9022	* 1.7050	* 1.8733	* 3.6008
12	* 1.7854	* 1.4779	* 1.7683	* 1.6064	* 1.4375	* 1.6344	* 1.0304	*
	* 1.5794	* 1.9486	* 1.6966	* 1.9035	* 2.0019	* 1.7928	* 2.6459	*
13	* 1.4812	* 1.6240	* 1.6112	* 1.7834	* 1.6331	* 1.0225	* 0.5537	*
	* 1.9032	* 1.7451	* 1.8202	* 1.7064	* 1.7942	* 2.8011	* 4.8522	*
14	* 1.7363	* 1.7587	* 1.7328	* 1.6249	* 1.0288	* 0.5377	*	*
	* 1.6307	* 1.6110	* 1.6643	* 1.8751	* 2.6498	* 4.9545	*	*
15	* 0.8439	* 0.8705	* 0.8053	* 0.7378	* F-SUB-Q			
	* 3.0267	* 2.9557	* 3.1933	* 3.6043	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 276 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.5147	* 1.5114	* 1.5418	* 1.5538	* 1.7285	* 1.7132	* 1.7820	* 0.9295 *
	* 2.0742	* 2.0973	* 1.9710	* 1.8845	* 1.6751	* 1.6818	* 1.6127	* 2.7821 *
9	* 1.5114	* 1.7680	* 1.5767	* 1.7968	* 1.6785	* 1.8779	* 1.8207	* 0.9607 *
	* 2.0973	* 1.7684	* 1.9265	* 1.6757	* 1.7481	* 1.5465	* 1.5925	* 2.7147 *
10	* 1.5418	* 1.5725	* 1.8072	* 1.7666	* 1.8375	* 1.8637	* 1.8395	* 0.9099 *
	* 1.9710	* 1.9360	* 1.7004	* 1.7233	* 1.6263	* 1.6082	* 1.6052	* 2.8956 *
11	* 1.5538	* 1.7929	* 1.7620	* 1.8193	* 1.8169	* 1.8082	* 1.7958	* 0.8467 *
	* 1.8845	* 1.6793	* 1.7283	* 1.7185	* 1.7133	* 1.7362	* 1.7389	* 3.2244 *
12	* 1.7285	* 1.6773	* 1.8359	* 1.8155	* 1.7847	* 1.7627	* 1.1393	*
	* 1.6751	* 1.7488	* 1.6278	* 1.7138	* 1.7142	* 1.7337	* 2.4604	*
13	* 1.7132	* 1.8767	* 1.8624	* 1.8066	* 1.7616	* 1.1895	* 0.6355	*
	* 1.6818	* 1.5472	* 1.6093	* 1.7376	* 1.7349	* 2.5221	* 4.3617	*
14	* 1.7820	* 1.8196	* 1.8384	* 1.7942	* 1.1379	* 0.6216	*	*
	* 1.6127	* 1.5933	* 1.6063	* 1.7407	* 2.4633	* 4.4208	*	*
15	* 0.9295	* 0.9606	* 0.9091	* 0.8458	* F-SUB-Q			
	* 2.7821	* 2.7152	* 2.8978	* 3.2275	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.6034	* 1.5812	* 1.5927	* 1.5818	* 1.8342	* 1.8014	* 1.8982	* 0.9331 *
	* 2.0243	* 2.0685	* 1.9819	* 1.9032	* 1.6179	* 1.6387	* 1.5488	* 2.8323 *
9	* 1.5812	* 1.8667	* 1.6435	* 1.8784	* 1.7530	* 1.9997	* 1.9480	* 0.9671 *
	* 2.0685	* 1.7146	* 1.9038	* 1.6487	* 1.7211	* 1.4848	* 1.5288	* 2.7586 *
10	* 1.5927	* 1.6398	* 1.9076	* 1.8364	* 1.9536	* 1.9776	* 1.9706	* 0.9234 *
	* 1.9819	* 1.9143	* 1.6522	* 1.7051	* 1.5717	* 1.5528	* 1.5383	* 2.9442 *
11	* 1.5818	* 1.8740	* 1.8312	* 1.9323	* 1.9186	* 1.9307	* 1.9145	* 0.8634 *
	* 1.9032	* 1.6526	* 1.7106	* 1.6572	* 1.6679	* 1.6743	* 1.6797	* 3.2538 *
12	* 1.8342	* 1.7516	* 1.9518	* 1.9180	* 1.9086	* 1.8881	* 1.1513	*
	* 1.6179	* 1.7219	* 1.5732	* 1.6684	* 1.6566	* 1.6735	* 2.5126	*
13	* 1.8014	* 1.9985	* 1.9762	* 1.9290	* 1.8868	* 1.2428	* 0.6462	*
	* 1.6387	* 1.4854	* 1.5538	* 1.6757	* 1.6747	* 2.5027	* 4.4344	*
14	* 1.8982	* 1.9468	* 1.9693	* 1.9126	* 1.1503	* 0.6318	*	*
	* 1.5488	* 1.5296	* 1.5393	* 1.6815	* 2.5145	* 4.4968	*	*
15	* 0.9331	* 0.9669	* 0.9226	* 0.8624	* F-SUB-Q			
	* 2.8323	* 2.7591	* 2.9469	* 3.2571	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 277 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.5956	* 1.5700	* 1.5889	* 1.5619	* 1.8452	* 1.8004	* 1.9226	* 0.9263
	* 2.1091	* 2.1589	* 2.0658	* 1.9928	* 1.6599	* 1.6904	* 1.5789	* 2.9470
9	* 1.5700	* 1.8694	* 1.6290	* 1.8844	* 1.7440	* 2.0134	* 1.9773	* 0.9642
	* 2.1589	* 1.7745	* 1.9909	* 1.6997	* 1.7868	* 1.5210	* 1.5573	* 2.8586
10	* 1.5889	* 1.6251	* 1.8995	* 1.8329	* 1.9724	* 1.9861	* 2.0007	* 0.9214
	* 2.0658	* 2.0028	* 1.7180	* 1.7683	* 1.6073	* 1.5890	* 1.5612	* 3.0431
11	* 1.5619	* 1.8797	* 1.8273	* 1.9562	* 1.9274	* 1.9582	* 1.9489	* 0.8642
	* 1.9928	* 1.7039	* 1.7741	* 1.6964	* 1.7203	* 1.7094	* 1.6961	* 3.3409
12	* 1.8452	* 1.7426	* 1.9705	* 1.9267	* 1.9197	* 1.9191	* 1.1557	*
	* 1.6599	* 1.7877	* 1.6090	* 1.7208	* 1.7081	* 1.7079	* 2.5969	*
13	* 1.8004	* 2.0120	* 1.9846	* 1.9564	* 1.9178	* 1.2545	* 0.6444	*
	* 1.6904	* 1.5217	* 1.5901	* 1.7108	* 1.7091	* 2.5763	* 4.6228	*
14	* 1.9226	* 1.9759	* 1.9993	* 1.9468	* 1.1548	* 0.6301	*	*
	* 1.5789	* 1.5581	* 1.5623	* 1.6980	* 2.5987	* 4.6871	*	*
15	* 0.9263	* 0.9640	* 0.9205	* 0.8632	* F-SUB-Q			
	* 2.9470	* 2.8592	* 3.0461	* 3.3444	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.5605	* 1.5346	* 1.5588	* 1.5273	* 1.8199	* 1.7724	* 1.9065	* 0.9142
	* 2.2357	* 2.2883	* 2.1789	* 2.1068	* 1.7361	* 1.7641	* 1.6405	* 3.0814
9	* 1.5346	* 1.8353	* 1.5924	* 1.8570	* 1.7110	* 1.9902	* 1.9634	* 0.9530
	* 2.2883	* 1.8736	* 2.1075	* 1.7829	* 1.8820	* 1.5835	* 1.6161	* 2.9831
10	* 1.5588	* 1.5884	* 1.8607	* 1.8034	* 1.9561	* 1.9600	* 1.9874	* 0.9119
	* 2.1789	* 2.1207	* 1.8130	* 1.8587	* 1.6822	* 1.6600	* 1.6224	* 3.1749
11	* 1.5273	* 1.8522	* 1.7975	* 1.9377	* 1.9028	* 1.9442	* 1.9416	* 0.8566
	* 2.1068	* 1.7876	* 1.8649	* 1.7824	* 1.8131	* 1.7860	* 1.7649	* 3.4917
12	* 1.8199	* 1.7095	* 1.9541	* 1.9021	* 1.8956	* 1.9076	* 1.1504	*
	* 1.7361	* 1.8829	* 1.6841	* 1.8138	* 1.8034	* 1.7928	* 2.7184	*
13	* 1.7724	* 1.9887	* 1.9583	* 1.9422	* 1.9062	* 1.2461	* 0.6382	*
	* 1.7641	* 1.5844	* 1.6613	* 1.7878	* 1.7941	* 2.7159	* 4.8894	*
14	* 1.9065	* 1.9619	* 1.9859	* 1.9394	* 1.1495	* 0.6237	*	*
	* 1.6405	* 1.6170	* 1.6237	* 1.7670	* 2.7204	* 4.9605	*	*
15	* 0.9142	* 0.9528	* 0.9110	* 0.8556	* F-SUB-Q			
	* 3.0814	* 2.9838	* 3.1782	* 3.4956	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 278 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.5314	* 1.5047	* 1.5378	* 1.5001	* 1.8051	* 1.7549	* 1.8995	* 0.8951
	* 2.3682	* 2.4198	* 2.3101	* 2.2442	* 1.8284	* 1.8586	* 1.7168	* 3.2784
9	* 1.5047	* 1.8119	* 1.5628	* 1.8389	* 1.6848	* 1.9749	* 1.9576	* 0.9339
	* 2.4198	* 1.9848	* 2.2457	* 1.8836	* 1.9991	* 1.6650	* 1.6924	* 3.1716
10	* 1.5378	* 1.5587	* 1.8315	* 1.7803	* 1.9470	* 1.9413	* 1.9824	* 0.8945
	* 2.3101	* 2.2604	* 1.9268	* 1.9704	* 1.7725	* 1.7491	* 1.6997	* 3.3823
11	* 1.5001	* 1.8339	* 1.7742	* 1.9266	* 1.8840	* 1.9379	* 1.9387	* 0.8399
	* 2.2442	* 1.8888	* 1.9773	* 1.8696	* 1.9091	* 1.8520	* 1.8423	* 3.7276
12	* 1.8051	* 1.6833	* 1.9448	* 1.8833	* 1.8780	* 1.9012	* 1.1294	*
	* 1.8284	* 2.0001	* 1.7746	* 1.9098	* 1.9007	* 1.8787	* 2.8863	*
13	* 1.7549	* 1.9731	* 1.9394	* 1.9358	* 1.8997	* 1.2282	* 0.6243	*
	* 1.8586	* 1.6660	* 1.7508	* 1.8540	* 1.8801	* 2.8811	* 5.2262	*
14	* 1.8995	* 1.9560	* 1.9806	* 1.9364	* 1.1285	* 0.6092	*	*
	* 1.7168	* 1.6934	* 1.7012	* 1.8445	* 2.8883	* 5.3099	*	*
15	* 0.8951	* 0.9337	* 0.8935	* 0.8389	* F-SUB-Q			
	* 3.2784	* 3.1724	* 3.3859	* 3.7320	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4930	* 1.4660	* 1.5034	* 1.4641	* 1.7732	* 1.7246	* 1.8727	* 0.8749
	* 2.5388	* 2.5976	* 2.5021	* 2.4353	* 1.9696	* 1.9994	* 1.8399	* 3.5411
9	* 1.4660	* 1.7724	* 1.5243	* 1.8041	* 1.6479	* 1.9434	* 1.9311	* 0.9134
	* 2.5976	* 2.1494	* 2.4395	* 2.0337	* 2.1644	* 1.7887	* 1.8142	* 3.4243
10	* 1.5034	* 1.5201	* 1.7897	* 1.7446	* 1.9177	* 1.9097	* 1.9562	* 0.8758
	* 2.5021	* 2.4560	* 2.0892	* 2.1308	* 1.9095	* 1.8816	* 1.8223	* 3.6538
11	* 1.4641	* 1.7990	* 1.7384	* 1.8959	* 1.8500	* 1.9110	* 1.9150	* 0.8225
	* 2.4353	* 2.0395	* 2.1386	* 1.9794	* 2.0264	* 1.9636	* 1.9512	* 4.0299
12	* 1.7732	* 1.6463	* 1.9155	* 1.8494	* 1.8449	* 1.8747	* 1.1077	*
	* 1.9696	* 2.1655	* 1.9118	* 2.0271	* 2.0188	* 1.9872	* 3.0677	*
13	* 1.7246	* 1.9416	* 1.9077	* 1.9088	* 1.8732	* 1.2050	* 0.6105	*
	* 1.9994	* 1.7898	* 1.8836	* 1.9658	* 1.9888	* 3.0775	* 5.5891	*
14	* 1.8727	* 1.9294	* 1.9543	* 1.9126	* 1.1068	* 0.5951	*	*
	* 1.8399	* 1.8154	* 1.8241	* 1.9537	* 3.0697	* 5.6852	*	*
15	* 0.8749	* 0.9132	* 0.8748	* 0.8213	* F-SUB-Q			
	* 3.5411	* 3.4252	* 3.6580	* 4.0350	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 279 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4585	* 1.4310	* 1.4740	* 1.4316	* 1.7460	* 1.6960	* 1.8490	* 0.8537 *
	* 2.7764	* 2.8348	* 2.7261	* 2.6518	* 2.1244	* 2.1571	* 1.9767	* 3.8319 *
9	* 1.4310	* 1.7385	* 1.4895	* 1.7736	* 1.6142	* 1.9144	* 1.9072	* 0.8902 *
	* 2.8348	* 2.3174	* 2.6725	* 2.2075	* 2.3484	* 1.9281	* 1.9503	* 3.7104 *
10	* 1.4740	* 1.4852	* 1.7527	* 1.7118	* 1.8913	* 1.8798	* 1.9323	* 0.8554 *
	* 2.7261	* 2.6908	* 2.2857	* 2.3209	* 2.0634	* 2.0323	* 1.9597	* 3.9519 *
11	* 1.4316	* 1.7684	* 1.7055	* 1.8685	* 1.8182	* 1.8866	* 1.8921	* 0.8018 *
	* 2.6518	* 2.2139	* 2.3295	* 2.1328	* 2.1905	* 2.1088	* 2.0883	* 4.3696 *
12	* 1.7460	* 1.6125	* 1.8890	* 1.8176	* 1.8140	* 1.8502	* 1.0820	*
	* 2.1244	* 2.3496	* 2.0660	* 2.1913	* 2.1855	* 2.1379	* 3.3302	*
13	* 1.6960	* 1.9124	* 1.8776	* 1.8844	* 1.8486	* 1.1789	* 0.5954	*
	* 2.1571	* 1.9295	* 2.0347	* 2.1114	* 2.1397	* 3.3370	* 6.0635	*
14	* 1.8490	* 1.9053	* 1.9303	* 1.8896	* 1.0811	* 0.5796	*	*
	* 1.9767	* 1.9516	* 1.9617	* 2.0911	* 3.3324	* 6.1752	*	*
15	* 0.8537	* 0.8899	* 0.8543	* 0.8007	* F-SUB-Q			
	* 3.8319	* 3.7115	* 3.9567	* 4.3753	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4032	* 1.3763	* 1.4143	* 1.3790	* 1.6806	* 1.6413	* 1.7842	* 0.8356 *
	* 3.0934	* 3.1489	* 3.0095	* 2.9133	* 2.3294	* 2.3535	* 2.1630	* 4.1282 *
9	* 1.3763	* 1.6687	* 1.4339	* 1.7072	* 1.5578	* 1.8517	* 1.8419	* 0.8736 *
	* 3.1489	* 2.5794	* 2.9447	* 2.4317	* 2.5675	* 2.1037	* 2.1306	* 3.9824 *
10	* 1.4143	* 1.4297	* 1.6881	* 1.6525	* 1.8251	* 1.8185	* 1.8661	* 0.8382 *
	* 3.0095	* 2.9652	* 2.5196	* 2.5536	* 2.2594	* 2.2136	* 2.1368	* 4.2263 *
11	* 1.3790	* 1.7020	* 1.6462	* 1.8023	* 1.7571	* 1.8205	* 1.8292	* 0.7879 *
	* 2.9133	* 2.4387	* 2.5631	* 2.3735	* 2.4336	* 2.3261	* 2.3009	* 4.6479 *
12	* 1.6806	* 1.5562	* 1.8227	* 1.7564	* 1.7534	* 1.7867	* 1.0660	*
	* 2.3294	* 2.5689	* 2.2623	* 2.4344	* 2.4383	* 2.3843	* 3.6185	*
13	* 1.6413	* 1.8496	* 1.8161	* 1.8182	* 1.7851	* 1.1525	* 0.5855	*
	* 2.3535	* 2.1054	* 2.2164	* 2.3291	* 2.3864	* 3.6770	* 6.6259	*
14	* 1.7842	* 1.8399	* 1.8639	* 1.8266	* 1.0649	* 0.5702	*	*
	* 2.1630	* 2.1321	* 2.1390	* 2.3041	* 3.6216	* 6.7459	*	*
15	* 0.8356	* 0.8732	* 0.8371	* 0.7867	* F-SUB-Q			
	* 4.1282	* 3.9837	* 4.2317	* 4.6543	* M-SUB-Q			

CNEI-0400-355
Appendix A, Rev. 0
Page 280 of 312

F-SUB-O & M-SUB-O VALUES (F-SUB-O OP MARGIN) - POWER ESCALATION

	H	G	F	E	D	C	B	A
8	1.3776	1.3498	1.3968	1.3542	1.6669	1.6210	1.7740	0.8104
	3.4035	3.4698	3.1933	3.1065	2.4624	2.4953	2.2754	4.4312
9	1.3498	1.6492	1.4078	1.6896	1.5319	1.8334	1.8311	0.8465
	3.4698	2.7714	3.1509	2.5752	2.7423	2.2265	2.2461	4.2840
10	1.3968	1.4036	1.6619	1.6291	1.8113	1.7986	1.8557	0.8137
	3.1933	3.1732	2.6910	2.7166	2.3954	2.3546	2.2585	4.5662
11	1.3542	1.6844	1.6228	1.7875	1.7345	1.8092	1.8178	0.7634
	3.1065	2.5825	2.7270	2.5778	2.6571	2.5295	2.4664	5.0372
12	1.6669	1.5302	1.8088	1.7339	1.7318	1.7737	1.0318	
	2.4624	2.7437	2.3987	2.6580	2.6570	2.5835	4.0239	
13	1.6210	1.8311	1.7960	1.8068	1.7720	1.1239	0.5659	
	2.4953	2.2283	2.3578	2.5328	2.5857	4.0641	7.3654	
14	1.7740	1.8289	1.8533	1.8150	1.0308	0.5500		
	2.2753	2.2478	2.2611	2.4700	4.0268	7.5132		
15	0.8104	0.8461	0.8125	0.7622	F-SUB-Q			
	4.4312	4.2855	4.5721	5.0444	M-SUB-Q			

	H	G	F	E	D	C	B	A
8	1.3384	1.3106	1.3592	1.3164	1.6276	1.5831	1.7360	0.7889
	3.5498	3.6137	3.4653	3.3728	2.6613	2.6951	2.4515	4.7849
9	1.3106	1.6056	1.3681	1.6478	1.4910	1.7921	1.7922	0.8248
	3.6137	2.9437	3.4303	2.7901	2.9738	2.4022	2.4204	4.6217
10	1.3592	1.3640	1.6169	1.5882	1.7707	1.7575	1.8166	0.7930
	3.4653	3.4550	2.9283	2.9477	2.5903	2.5438	2.4337	4.9260
11	1.3164	1.6426	1.5818	1.7463	1.6923	1.7701	1.7801	0.7441
	3.3728	2.7977	2.9591	2.7402	2.8283	2.6838	2.6623	5.4448
12	1.6276	1.4893	1.7681	1.6917	1.6901	1.7349	1.0065	
	2.6613	2.9755	2.5939	2.8293	2.8427	2.7606	4.3122	
13	1.5831	1.7896	1.7547	1.7676	1.7332	1.0962	0.5512	
	2.6951	2.4043	2.5475	2.6878	2.7633	4.3750	7.9753	
14	1.7360	1.7900	1.8142	1.7772	1.0055	0.5353		
	2.4515	2.4223	2.4366	2.6662	4.3158	8.1416		
15	0.7889	0.8245	0.7918	0.7428	F-SUB-Q			
	4.7849	4.6234	4.9325	5.4528	M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 281 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2882	* 1.2611	* 1.3056	* 1.2682	* 1.5673	* 1.5316	* 1.6758	* 0.7698
	* 3.5842	* 3.6494	* 3.4716	* 3.3877	* 2.7049	* 2.7472	* 2.5169	* 4.8944
9	* 1.2611	* 1.5426	* 1.3173	* 1.5866	* 1.4386	* 1.7332	* 1.7312	* 0.8062
	* 3.6494	* 2.9775	* 3.4235	* 2.8255	* 3.0098	* 2.4618	* 2.4915	* 4.7204
10	* 1.3056	* 1.3133	* 1.5577	* 1.5328	* 1.7087	* 1.6992	* 1.7545	* 0.7743
	* 3.4716	* 3.4484	* 2.9447	* 2.9758	* 2.6497	* 2.6224	* 2.5198	* 5.0693
11	* 1.2682	* 1.5814	* 1.5265	* 1.6845	* 1.6345	* 1.7083	* 1.7204	* 0.7274
	* 3.3877	* 2.8346	* 2.9881	* 2.7661	* 2.8510	* 2.7060	* 2.6848	* 5.6492
12	* 1.5673	* 1.4368	* 1.7061	* 1.6339	* 1.6333	* 1.6751	* 0.9871	*
	* 2.7049	* 3.0118	* 2.6540	* 2.8520	* 2.8653	* 2.7851	* 4.2808	*
13	* 1.5316	* 1.7306	* 1.6963	* 1.7057	* 1.6734	* 1.0685	* 0.5397	*
	* 2.7472	* 2.4642	* 2.6274	* 2.7103	* 2.7879	* 4.3729	* 7.9317	*
14	* 1.6758	* 1.7288	* 1.7519	* 1.7176	* 0.9859	* 0.5242	*	*
	* 2.5169	* 2.4939	* 2.5234	* 2.6894	* 4.2853	* 8.0957	*	*
15	* 0.7698	* 0.8058	* 0.7731	* 0.7261	* F-SUB-Q			
	* 4.8944	* 4.7227	* 5.0763	* 5.6594	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2617	* 1.2340	* 1.2855	* 1.2416	* 1.5494	* 1.5081	* 1.6607	* 0.7443
	* 3.4465	* 3.5013	* 3.2844	* 3.2281	* 2.5562	* 2.6069	* 2.3738	* 4.7305
9	* 1.2340	* 1.5204	* 1.2902	* 1.5653	* 1.4098	* 1.7106	* 1.7154	* 0.7787
	* 3.5013	* 2.8385	* 3.2543	* 2.6717	* 2.8691	* 2.3305	* 2.3510	* 4.5696
10	* 1.2855	* 1.2861	* 1.5287	* 1.5069	* 1.6902	* 1.6757	* 1.7394	* 0.7497
	* 3.2844	* 3.2787	* 2.7943	* 2.8222	* 2.5037	* 2.4848	* 2.3751	* 4.9055
11	* 1.2416	* 1.5601	* 1.5005	* 1.6653	* 1.6085	* 1.6926	* 1.7043	* 0.7027
	* 3.2281	* 2.6804	* 2.8342	* 2.6712	* 2.7695	* 2.6131	* 2.5884	* 5.4634
12	* 1.5494	* 1.4081	* 1.6875	* 1.6080	* 1.6081	* 1.6574	* 0.9530	*
	* 2.5562	* 2.8712	* 2.5080	* 2.7704	* 2.7875	* 2.6862	* 4.1954	*
13	* 1.5081	* 1.7079	* 1.6726	* 1.6899	* 1.6557	* 1.0390	* 0.5203	*
	* 2.6069	* 2.3329	* 2.4897	* 2.6172	* 2.6888	* 4.2564	* 7.7054	*
14	* 1.6607	* 1.7129	* 1.7366	* 1.7013	* 0.9520	* 0.5044	*	*
	* 2.3738	* 2.3534	* 2.3787	* 2.5928	* 4.1991	* 7.8794	*	*
15	* 0.7443	* 0.7783	* 0.7485	* 0.7013	* F-SUB-Q			
	* 4.7305	* 4.5719	* 4.9138	* 5.4739	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 282 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2275	* 1.1997	* 1.2531	* 1.2079	* 1.5147	* 1.4743	* 1.6278	* 0.7225
	* 3.1296	* 3.1834	* 3.0338	* 3.0355	* 2.4172	* 2.4742	* 2.2477	* 4.4848
9	* 1.1997	* 1.4829	* 1.2552	* 1.5286	* 1.3728	* 1.6741	* 1.6818	* 0.7559
	* 3.1834	* 2.5797	* 3.0426	* 2.5062	* 2.7203	* 2.2109	* 2.2262	* 4.3312
10	* 1.2531	* 1.2510	* 1.4890	* 1.4699	* 1.6542	* 1.6387	* 1.7054	* 0.7284
	* 3.0338	* 3.0522	* 2.5966	* 2.6316	* 2.3618	* 2.3559	* 2.2445	* 4.6340
11	* 1.2079	* 1.5233	* 1.4635	* 1.6289	* 1.5702	* 1.6589	* 1.6709	* 0.6815
	* 3.0355	* 2.5144	* 2.6426	* 2.4212	* 2.5143	* 2.3623	* 2.3408	* 5.1347
12	* 1.5147	* 1.3710	* 1.6515	* 1.5697	* 1.5708	* 1.6229	* 0.9260	*
	* 2.4172	* 2.7221	* 2.3659	* 2.5151	* 2.5311	* 2.4337	* 3.8293	*
13	* 1.4743	* 1.6714	* 1.6354	* 1.6561	* 1.6212	* 1.0104	* 0.5047	*
	* 2.4742	* 2.2133	* 2.3604	* 2.3662	* 2.4361	* 3.8859	* 7.0555	*
14	* 1.6278	* 1.6792	* 1.7026	* 1.6679	* 0.9251	* 0.4887	*	
	* 2.2477	* 2.2286	* 2.2479	* 2.3449	* 3.8326	* 7.2224	*	
15	* 0.7225	* 0.7555	* 0.7271	* 0.6801	* F-SUB-Q			
	* 4.4848	* 4.3335	* 4.6420	* 5.1446	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1919	* 1.1644	* 1.2176	* 1.1728	* 1.4746	* 1.4363	* 1.5873	* 0.7040
	* 2.8650	* 2.9145	* 2.7438	* 2.7289	* 2.1702	* 2.2225	* 2.0169	* 4.0366
9	* 1.1644	* 1.4414	* 1.2189	* 1.4874	* 1.3339	* 1.6319	* 1.6402	* 0.7376
	* 2.9145	* 2.3503	* 2.7297	* 2.2456	* 2.4455	* 1.9848	* 1.9957	* 3.8918
10	* 1.2176	* 1.2148	* 1.4467	* 1.4304	* 1.6120	* 1.5967	* 1.6634	* 0.7104
	* 2.7438	* 2.7504	* 2.3487	* 2.3722	* 2.1160	* 2.1090	* 2.0087	* 4.1570
11	* 1.1728	* 1.4822	* 1.4240	* 1.5868	* 1.5285	* 1.6173	* 1.6299	* 0.6658
	* 2.7289	* 2.2532	* 2.3826	* 2.2207	* 2.3070	* 2.1584	* 2.1374	* 4.6026
12	* 1.4746	* 1.3321	* 1.6093	* 1.5280	* 1.5292	* 1.5820	* 0.9045	
	* 2.1702	* 2.4472	* 2.1197	* 2.3078	* 2.3252	* 2.2338	* 3.5038	
13	* 1.4363	* 1.6298	* 1.5933	* 1.6144	* 1.5803	* 0.9863	* 0.4923	
	* 2.2225	* 1.9870	* 2.1134	* 2.1621	* 2.2361	* 3.5666	* 6.4883	
14	* 1.5873	* 1.6375	* 1.6605	* 1.6268	* 0.9035	* 0.4766	*	
	* 2.0169	* 1.9978	* 2.0120	* 2.1414	* 3.5072	* 6.6436	*	
15	* 0.7040	* 0.7372	* 0.7091	* 0.6644	* F-SUB-Q			
	* 4.0366	* 3.8939	* 4.1644	* 4.6119	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 283 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1533	* 1.1264	* 1.1757	* 1.1351	* 1.4250	* 1.3932	* 1.5362	* 0.6892 *
	* 2.8299	* 2.8805	* 2.7045	* 2.6883	* 2.1436	* 2.1883	* 1.9908	* 3.9515 *
9	* 1.1264	* 1.3918	* 1.1793	* 1.4377	* 1.2919	* 1.5824	* 1.5879	* 0.7233 *
	* 2.8805	* 2.3209	* 2.6806	* 2.2106	* 2.4073	* 1.9525	* 1.9668	* 3.8000 *
10	* 1.1757	* 1.1753	* 1.3996	* 1.3855	* 1.5595	* 1.5474	* 1.6100	* 0.6954 *
	* 2.7045	* 2.7013	* 2.3048	* 2.3266	* 2.0838	* 2.0699	* 1.9760	* 4.0535 *
11	* 1.1351	* 1.4325	* 1.3793	* 1.5346	* 1.4803	* 1.5648	* 1.5787	* 0.6525 *
	* 2.6883	* 2.2182	* 2.3369	* 2.2022	* 2.2835	* 2.1383	* 2.1156	* 4.4712 *
12	* 1.4250	* 1.2901	* 1.5567	* 1.4798	* 1.4814	* 1.5309	* 0.8888 *	
	* 2.1436	* 2.4091	* 2.0877	* 2.2843	* 2.3014	* 2.2139	* 3.4216 *	
13	* 1.3932	* 1.5803	* 1.5440	* 1.5620	* 1.5293	* 0.9636	* 0.4830 *	
	* 2.1883	* 1.9548	* 2.0747	* 2.1421	* 2.2163	* 3.5088	* 6.3562 *	
14	* 1.5362	* 1.5852	* 1.6071	* 1.5756	* 0.8877	* 0.4678 *		
	* 1.9908	* 1.9690	* 1.9794	* 2.1196	* 3.4254	* 6.5052 *		
15	* 0.6892	* 0.7229	* 0.6941	* 0.6511	* F-SUB-Q			
	* 3.9515	* 3.8021	* 4.0611	* 4.4805	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1381	* 1.1106	* 1.1668	* 1.1187	* 1.4170	* 1.3777	* 1.5294	* 0.6680 *
	* 2.5555	* 2.6002	* 2.4268	* 2.4342	* 1.9267	* 1.9787	* 1.7891	* 3.6547 *
9	* 1.1106	* 1.3824	* 1.1633	* 1.4276	* 1.2728	* 1.5692	* 1.5801	* 0.7001 *
	* 2.6002	* 2.0714	* 2.4151	* 1.9819	* 2.1823	* 1.7592	* 1.7667	* 3.5209 *
10	* 1.1668	* 1.1593	* 1.3827	* 1.3702	* 1.5498	* 1.5321	* 1.6027	* 0.6747 *
	* 2.4268	* 2.4343	* 2.0704	* 2.0902	* 1.8680	* 1.8615	* 1.7690	* 3.7326 *
11	* 1.1187	* 1.4224	* 1.3638	* 1.5246	* 1.4635	* 1.5572	* 1.5693	* 0.6305 *
	* 2.4342	* 1.9889	* 2.0997	* 1.9889	* 2.0686	* 1.9056	* 1.8850	* 4.1190 *
12	* 1.4170	* 1.2710	* 1.5470	* 1.4630	* 1.4647	* 1.5209	* 0.8589 *	
	* 1.9267	* 2.1839	* 1.8715	* 2.0707	* 2.0800	* 1.9978	* 3.1622 *	
13	* 1.3777	* 1.5671	* 1.5286	* 1.5543	* 1.5192	* 0.9384	* 0.4663 *	
	* 1.9787	* 1.7614	* 1.8657	* 1.9090	* 2.0000	* 3.2233	* 5.9105 *	
14	* 1.5294	* 1.5774	* 1.5997	* 1.5662	* 0.8580	* 0.4508 *		
	* 1.7891	* 1.7688	* 1.7721	* 1.8887	* 3.1652	* 6.0615 *		
15	* 0.6680	* 0.6997	* 0.6734	* 0.6291	* F-SUB-Q			
	* 3.6547	* 3.5230	* 3.7396	* 4.1278	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 284 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1156 *	* 1.0879 *	* 1.1440 *	* 1.0957 *	* 1.3897 *	* 1.3508 *	* 1.5001 *	* 0.6528 *
	* 2.3159 *	* 2.3722 *	* 2.2244 *	* 2.2473 *	* 1.7792 *	* 1.8291 *	* 1.6536 *	* 3.4004 *
9	* 1.0879 *	* 1.3558 *	* 1.1401 *	* 1.3998 *	* 1.2465 *	* 1.5397 *	* 1.5496 *	* 0.6843 *
	* 2.3722 *	* 1.8904 *	* 2.2165 *	* 1.8207 *	* 2.0159 *	* 1.6226 *	* 1.6294 *	* 3.2735 *
10	* 1.1440 *	* 1.1361 *	* 1.3560 *	* 1.3437 *	* 1.5188 *	* 1.5018 *	* 1.5714 *	* 0.6592 *
	* 2.2244 *	* 2.2343 *	* 1.8959 *	* 1.9153 *	* 1.7172 *	* 1.7108 *	* 1.6272 *	* 3.4561 *
11	* 1.0957 *	* 1.3946 *	* 1.3374 *	* 1.4944 *	* 1.4338 *	* 1.5262 *	* 1.5371 *	* 0.6157 *
	* 2.2473 *	* 1.8272 *	* 1.9241 *	* 1.8071 *	* 1.8826 *	* 1.7529 *	* 1.7314 *	* 3.7990 *
12	* 1.3897 *	* 1.2447 *	* 1.5160 *	* 1.4334 *	* 1.4350 *	* 1.4897 *	* 0.8390 *	
	* 1.7792 *	* 2.0173 *	* 1.7205 *	* 1.8832 *	* 1.8896 *	* 1.8173 *	* 2.9028 *	
13	* 1.3508 *	* 1.5375 *	* 1.4983 *	* 1.5233 *	* 1.4880 *	* 0.9171 *	* 0.4553 *	
	* 1.8291 *	* 1.6247 *	* 1.7147 *	* 1.7561 *	* 1.8193 *	* 2.9473 *	* 5.4103 *	
14	* 1.5001 *	* 1.5469 *	* 1.5685 *	* 1.5339 *	* 0.8381 *	* 0.4399 *		
	* 1.6536 *	* 1.6317 *	* 1.6301 *	* 1.7349 *	* 2.9056 *	* 5.5506 *		
15	* 0.6528 *	* 0.6839 *	* 0.6579 *	* 0.6142 *	* F-SUB-Q			
	* 3.4004 *	* 3.2755 *	* 3.4627 *	* 3.8073 *	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0837 *	* 1.0569 *	* 1.1043 *	* 1.0652 *	* 1.3391 *	* 1.3098 *	* 1.4429 *	* 0.6436 *
	* 2.1859 *	* 2.2430 *	* 2.0956 *	* 2.1196 *	* 1.6962 *	* 1.7338 *	* 1.5799 *	* 3.1820 *
9	* 1.0569 *	* 1.3084 *	* 1.1085 *	* 1.3508 *	* 1.2114 *	* 1.4901 *	* 1.4907 *	* 0.6759 *
	* 2.2430 *	* 1.7777 *	* 2.0785 *	* 1.7223 *	* 1.9010 *	* 1.5382 *	* 1.5524 *	* 3.0546 *
10	* 1.1043 *	* 1.1046 *	* 1.3170 *	* 1.3041 *	* 1.4621 *	* 1.4537 *	* 1.5110 *	* 0.6490 *
	* 2.0956 *	* 2.0884 *	* 1.7761 *	* 1.7963 *	* 1.6269 *	* 1.6133 *	* 1.5466 *	* 3.2203 *
11	* 1.0652 *	* 1.3458 *	* 1.2980 *	* 1.4399 *	* 1.3892 *	* 1.4667 *	* 1.4767 *	* 0.6078 *
	* 2.1196 *	* 1.7284 *	* 1.8046 *	* 1.7167 *	* 1.7799 *	* 1.6481 *	* 1.6299 *	* 3.5116 *
12	* 1.3391 *	* 1.2097 *	* 1.4594 *	* 1.3887 *	* 1.3894 *	* 1.4326 *	* 0.8290 *	
	* 1.6962 *	* 1.9039 *	* 1.6299 *	* 1.7804 *	* 1.7833 *	* 1.7280 *	* 2.6918 *	
13	* 1.3098 *	* 1.4881 *	* 1.4503 *	* 1.4639 *	* 1.4310 *	* 0.8987 *	* 0.4502 *	
	* 1.7338 *	* 1.5402 *	* 1.6170 *	* 1.6512 *	* 1.7299 *	* 2.7453 *	* 5.0095 *	
14	* 1.4429 *	* 1.4881 *	* 1.5081 *	* 1.4737 *	* 0.8279 *	* 0.4357 *		
	* 1.5799 *	* 1.5546 *	* 1.5493 *	* 1.6332 *	* 2.6952 *	* 5.1311 *		
15	* 0.6436 *	* 0.6755 *	* 0.6477 *	* 0.6064 *	* F-SUB-Q			
	* 3.1820 *	* 3.0564 *	* 3.2263 *	* 3.5192 *	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 285 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0715	* 1.0455	* 1.0964	* 1.0594	* 1.3234	* 1.2929	* 1.4218	* 0.6282
	* 2.0118	* 2.0555	* 1.9433	* 1.9808	* 1.5983	* 1.6364	* 1.4941	* 3.0444
9	* 1.0455	* 1.2950	* 1.0985	* 1.3370	* 1.1987	* 1.4695	* 1.4670	* 0.6583
	* 2.0555	* 1.6527	* 1.9372	* 1.6106	* 1.7833	* 1.4509	* 1.4664	* 2.9294
10	* 1.0964	* 1.0948	* 1.3049	* 1.2923	* 1.4407	* 1.4343	* 1.4870	* 0.6320
	* 1.9433	* 1.9431	* 1.6550	* 1.6732	* 1.5264	* 1.5134	* 1.4565	* 3.0752
11	* 1.0594	* 1.3322	* 1.2864	* 1.4192	* 1.3718	* 1.4444	* 1.4494	* 0.5896
	* 1.9808	* 1.6162	* 1.6807	* 1.5928	* 1.6451	* 1.5391	* 1.5304	* 3.3508
12	* 1.3234	* 1.1971	* 1.4381	* 1.3714	* 1.3711	* 1.4082	* 0.8027	*
	* 1.5983	* 1.7855	* 1.5292	* 1.6456	* 1.6585	* 1.6112	* 2.5381	*
13	* 1.2929	* 1.4675	* 1.4309	* 1.4416	* 1.4066	* 0.8732	* 0.4369	*
	* 1.6364	* 1.4528	* 1.5168	* 1.5420	* 1.6130	* 2.6096	* 4.7557	*
14	* 1.4218	* 1.4644	* 1.4842	* 1.4465	* 0.8017	* 0.4223	*	*
	* 1.4941	* 1.4685	* 1.4591	* 1.5334	* 2.5410	* 4.8775	*	*
15	* 0.6282	* 0.6579	* 0.6307	* 0.5882	* F-SUB-Q			
	* 3.0444	* 2.9311	* 3.0810	* 3.3581	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0171	* 1.0040	* 1.0720	* 1.0435	* 1.2599	* 1.2366	* 1.3545	* 0.6186
	* 1.9807	* 1.9974	* 1.8592	* 1.8976	* 1.5866	* 1.6182	* 1.4825	* 2.9307
9	* 1.0040	* 1.2397	* 1.0567	* 1.2926	* 1.1541	* 1.3965	* 1.3922	* 0.6468
	* 1.9974	* 1.6177	* 1.8917	* 1.5665	* 1.7466	* 1.4431	* 1.4564	* 2.8266
10	* 1.0720	* 1.0527	* 1.2433	* 1.2535	* 1.3775	* 1.3651	* 1.4105	* 0.6167
	* 1.8592	* 1.8974	* 1.6323	* 1.6194	* 1.5095	* 1.4959	* 1.4457	* 2.9782
11	* 1.0435	* 1.2882	* 1.2480	* 1.3483	* 1.3124	* 1.3761	* 1.3829	* 0.5703
	* 1.8976	* 1.5717	* 1.6264	* 1.5532	* 1.5996	* 1.5103	* 1.4980	* 3.2631
12	* 1.2599	* 1.1526	* 1.3750	* 1.3120	* 1.3010	* 1.3416	* 0.7868	*
	* 1.5866	* 1.7488	* 1.5122	* 1.6012	* 1.6251	* 1.5740	* 2.4244	*
13	* 1.2366	* 1.3939	* 1.3620	* 1.3737	* 1.3401	* 0.8384	* 0.4234	*
	* 1.6182	* 1.4448	* 1.4992	* 1.5130	* 1.5757	* 2.5228	* 4.5799	*
14	* 1.3545	* 1.3898	* 1.4079	* 1.3802	* 0.7855	* 0.4090	*	*
	* 1.4825	* 1.4585	* 1.4483	* 1.5010	* 2.4278	* 4.7000	*	*
15	* 0.6186	* 0.6464	* 0.6156	* 0.5691	* F-SUB-Q			
	* 2.9307	* 2.8282	* 2.9836	* 3.2700	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 286 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 50% POWER, 4 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.8439	* 0.8820	* 1.1458	* 0.9345	* 1.2637	* 1.0425	* 1.2926	* 0.5651
	* 2.2654	* 2.1542	* 1.6521	* 2.0287	* 1.5070	* 1.8382	* 1.4832	* 3.0840
9	* 0.8820	* 1.1640	* 0.9059	* 1.2085	* 0.9953	* 1.1863	* 1.3206	* 0.5892
	* 2.1542	* 1.6406	* 2.1071	* 1.5919	* 1.9315	* 1.6227	* 1.4636	* 2.9837
10	* 1.1458	* 0.9000	* 1.0419	* 1.1040	* 1.2817	* 1.1465	* 1.3064	* 0.5454
	* 1.6521	* 2.1129	* 1.8584	* 1.7533	* 1.5323	* 1.7016	* 1.4897	* 3.2236
11	* 0.9345	* 1.2028	* 1.0995	* 1.2703	* 1.1417	* 1.3395	* 1.2319	* 0.5005
	* 2.0287	* 1.5977	* 1.7604	* 1.5578	* 1.7363	* 1.4758	* 1.6006	* 3.5604
12	* 1.2637	* 0.9935	* 1.2792	* 1.1406	* 1.0632	* 1.2420	* 0.7198	*
	* 1.5070	* 1.9350	* 1.5352	* 1.7379	* 1.8927	* 1.6168	* 2.5245	*
13	* 1.0425	* 1.1848	* 1.1439	* 1.3373	* 1.2404	* 0.7349	* 0.3718	*
	* 1.8382	* 1.6248	* 1.7054	* 1.4783	* 1.6188	* 2.7417	* 4.9839	*
14	* 1.2926	* 1.3187	* 1.3040	* 1.2294	* 0.7180	* 0.3596	*	*
	* 1.4832	* 1.4650	* 1.4923	* 1.6038	* 2.5305	* 5.1084	*	*
15	* 0.5651	* 0.5887	* 0.5445	* 0.4994	* F-SUB-Q			
	* 3.0840	* 2.9854	* 3.2286	* 3.5678	* M-SUB-Q			

AT 50% POWER, 4 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.3627	* 0.3906	* 0.4673	* 0.4176	* 0.5030	* 0.4316	* 0.4736	* 0.2438
	* 5.0381	* 4.6631	* 3.8820	* 4.3624	* 3.6234	* 4.2493	* 3.8806	* 6.8828
9	* 0.3906	* 0.4556	* 0.4026	* 0.4942	* 0.4424	* 0.4616	* 0.4798	* 0.2511
	* 4.6631	* 3.9989	* 4.5295	* 3.7202	* 4.1735	* 3.9972	* 3.8437	* 6.7328
10	* 0.4673	* 0.4015	* 0.4195	* 0.4664	* 0.5201	* 0.4596	* 0.4733	* 0.2361
	* 3.8819	* 4.5412	* 4.4139	* 3.9727	* 3.5905	* 4.0612	* 3.9346	* 7.1615
11	* 0.4176	* 0.4925	* 0.4647	* 0.5160	* 0.4657	* 0.5160	* 0.4443	* 0.2109
	* 4.3624	* 3.7324	* 3.9875	* 3.6434	* 4.0497	* 3.6599	* 4.2437	* 8.1191
12	* 0.5030	* 0.4415	* 0.5191	* 0.4651	* 0.4176	* 0.4544	* 0.3075	*
	* 3.6234	* 4.1816	* 3.5977	* 4.0547	* 4.5683	* 4.2121	* 5.6519	*
13	* 0.4316	* 0.4611	* 0.4587	* 0.5151	* 0.4538	* 0.3200	* 0.1605	*
	* 4.2493	* 4.0018	* 4.0697	* 3.6659	* 4.2173	* 6.0334	* 11.1105	*
14	* 0.4736	* 0.4791	* 0.4725	* 0.4435	* 0.3067	* 0.1578	*	*
	* 3.8806	* 3.8472	* 3.9413	* 4.2520	* 5.6660	* 11.2029	*	*
15	* 0.2438	* 0.2510	* 0.2358	* 0.2105	* F-SUB-Q			
	* 6.8828	* 6.7365	* 7.1722	* 8.1355	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 287 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 30% POWER, 4 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.5531	* 0.6335	* 0.7588	* 0.6829	* 0.8043	* 0.6855	* 0.7274	* 0.3825 *
	* 4.8989	* 4.8236	* 3.8514	* 4.1494	* 3.5265	* 4.1457	* 3.9537	* 6.6582 *
9	* 0.6335	* 0.7343	* 0.6583	* 0.7968	* 0.7180	* 0.7116	* 0.7349	* 0.3937 *
	* 4.8236	* 4.1837	* 4.4399	* 3.6707	* 4.0399	* 4.0761	* 3.9447	* 6.5329 *
10	* 0.7588	* 0.6569	* 0.6878	* 0.7465	* 0.8166	* 0.7220	* 0.7214	* 0.3664 *
	* 3.8514	* 4.4479	* 4.4138	* 4.0066	* 3.6781	* 4.1268	* 4.0815	* 7.0291 *
11	* 0.6829	* 0.7949	* 0.7445	* 0.8074	* 0.7269	* 0.7848	* 0.6732	* 0.3273 *
	* 4.1494	* 3.6769	* 4.0161	* 3.8636	* 4.2714	* 3.9700	* 4.5555	* 8.0993 *
12	* 0.8043	* 0.7169	* 0.8154	* 0.7261	* 0.6181	* 0.6601	* 0.4689	*
	* 3.5265	* 4.0424	* 3.6835	* 4.2743	* 4.6987	* 4.4088	* 5.8482	*
13	* 0.6855	* 0.7111	* 0.7212	* 0.7840	* 0.6595	* 0.4651	* 0.2472	*
	* 4.1457	* 4.0785	* 4.1310	* 3.9734	* 4.4123	* 6.0123	* 10.7418	*
14	* 0.7274	* 0.7346	* 0.7207	* 0.6725	* 0.4681	* 0.2403	*	*
	* 3.9537	* 3.9462	* 4.0847	* 4.5601	* 5.8565	* 10.9520	*	*
15	* 0.3825	* 0.3936	* 0.3661	* 0.3269	* F-SUB-Q			
	* 6.6582	* 6.5344	* 7.0342	* 8.1079	* M-SUB-Q			

AT 30% POWER, 4 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3094	* 1.4126	* 1.7770	* 1.5009	* 1.9186	* 1.5947	* 1.8838	* 0.8959 *
	* 2.3571	* 2.3151	* 1.7478	* 2.0150	* 1.5794	* 1.9032	* 1.6307	* 3.0267 *
9	* 1.4126	* 1.7960	* 1.4585	* 1.8538	* 1.5840	* 1.7676	* 1.9157	* 0.9256 *
	* 2.3151	* 1.8221	* 2.1497	* 1.6822	* 1.9479	* 1.7443	* 1.6104	* 2.9546 *
10	* 1.7770	* 1.4518	* 1.6608	* 1.7076	* 1.9147	* 1.7522	* 1.8893	* 0.8569 *
	* 1.7478	* 2.1541	* 1.9554	* 1.8685	* 1.6945	* 1.8186	* 1.6631	* 3.1910 *
11	* 1.5009	* 1.8475	* 1.7028	* 1.9004	* 1.7423	* 1.9439	* 1.7669	* 0.7835 *
	* 2.0150	* 1.6848	* 1.8735	* 1.7483	* 1.9022	* 1.7050	* 1.8733	* 3.6008 *
12	* 1.9186	* 1.5819	* 1.9121	* 1.7409	* 1.5605	* 1.7727	* 1.1024	*
	* 1.5794	* 1.9486	* 1.6966	* 1.9035	* 2.0019	* 1.7928	* 2.6459	*
13	* 1.5947	* 1.7666	* 1.7505	* 1.9420	* 1.7712	* 1.0939	* 0.5810	*
	* 1.9032	* 1.7451	* 1.8202	* 1.7064	* 1.7942	* 2.8011	* 4.8522	*
14	* 1.8838	* 1.9145	* 1.8878	* 1.7649	* 1.1005	* 0.5640	*	*
	* 1.6307	* 1.6110	* 1.6643	* 1.8751	* 2.6498	* 4.9545	*	*
15	* 0.8959	* 0.9253	* 0.8562	* 0.7826	* F-SUB-Q			
	* 3.0267	* 2.9557	* 3.1933	* 3.6043	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 288 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 30% POWER, 4 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.5932	* 1.5910	* 1.6270	* 1.6545	* 1.8666	* 1.8557	* 1.9396	* 0.9904
	* 2.0742	* 2.0973	* 1.9710	* 1.8845	* 1.6751	* 1.6818	* 1.6127	* 2.7821
9	* 1.5910	* 1.8778	* 1.6781	* 1.9341	* 1.8148	* 2.0558	* 1.9904	* 1.0247
	* 2.0973	* 1.7684	* 1.9265	* 1.6757	* 1.7481	* 1.5465	* 1.5925	* 2.7147
10	* 1.6270	* 1.6695	* 1.9475	* 1.9058	* 1.9986	* 2.0368	* 2.0113	* 0.9712
	* 1.9710	* 1.9360	* 1.7004	* 1.7233	* 1.6263	* 1.6082	* 1.6052	* 2.8956
11	* 1.6545	* 1.9296	* 1.9003	* 1.9711	* 1.9790	* 1.9753	* 1.9576	* 0.9023
	* 1.8845	* 1.6793	* 1.7283	* 1.7185	* 1.7133	* 1.7362	* 1.7389	* 3.2244
12	* 1.8666	* 1.8132	* 1.9965	* 1.9773	* 1.9473	* 1.9190	* 1.2231	*
	* 1.6751	* 1.7488	* 1.6278	* 1.7138	* 1.7142	* 1.7337	* 2.4604	*
13	* 1.8557	* 2.0542	* 2.0351	* 1.9734	* 1.9176	* 1.2774	* 0.6697	*
	* 1.6818	* 1.5472	* 1.6093	* 1.7376	* 1.7349	* 2.5221	* 4.3617	*
14	* 1.9396	* 1.9890	* 2.0097	* 1.9554	* 1.2214	* 0.6548	*	*
	* 1.6127	* 1.5933	* 1.6063	* 1.7407	* 2.4633	* 4.4208	*	*
15	* 0.9904	* 1.0245	* 0.9703	* 0.9012	* F-SUB-Q			
	* 2.7821	* 2.7152	* 2.8978	* 3.2275	* M-SUB-Q			

AT 30% POWER, 4 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.6839	* 1.6614	* 1.6774	* 1.6808	* 1.9777	* 1.9472	* 2.0612	* 0.9922
	* 2.0243	* 2.0685	* 1.9819	* 1.9032	* 1.6179	* 1.6387	* 1.5488	* 2.8323
9	* 1.6614	* 1.9819	* 1.7422	* 2.0178	* 1.8913	* 2.1845	* 2.1246	* 1.0294
	* 2.0685	* 1.7146	* 1.9038	* 1.6487	* 1.7211	* 1.4848	* 1.5288	* 2.7586
10	* 1.6774	* 1.7380	* 2.0517	* 1.9766	* 2.1177	* 2.1567	* 2.1495	* 0.9839
	* 1.9819	* 1.9143	* 1.6522	* 1.7051	* 1.5717	* 1.5528	* 1.5383	* 2.9442
11	* 1.6808	* 2.0127	* 1.9704	* 2.0998	* 2.0890	* 2.1040	* 2.0817	* 0.9185
	* 1.9032	* 1.6526	* 1.7106	* 1.6572	* 1.6679	* 1.6743	* 1.6797	* 3.2538
12	* 1.9777	* 1.8897	* 2.1155	* 2.0883	* 2.0782	* 2.0507	* 1.2332	*
	* 1.6179	* 1.7219	* 1.5732	* 1.6684	* 1.6566	* 1.6735	* 2.5126	*
13	* 1.9472	* 2.1828	* 2.1549	* 2.1018	* 2.0491	* 1.3322	* 0.6801	*
	* 1.6387	* 1.4854	* 1.5538	* 1.6757	* 1.6747	* 2.5027	* 4.4344	*
14	* 2.0612	* 2.1231	* 2.1478	* 2.0794	* 1.2320	* 0.6648	*	*
	* 1.5488	* 1.5296	* 1.5393	* 1.6815	* 2.5145	* 4.4968	*	*
15	* 0.9922	* 1.0292	* 0.9829	* 0.9175	* F-SUB-Q			
	* 2.8323	* 2.7591	* 2.9469	* 3.2571	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 289 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 30% POWER, 4 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.6682	* 1.6423	* 1.6663	* 1.6523	* 1.9805	* 1.9371	* 2.0777	* 0.9813
	* 2.1091	* 2.1589	* 2.0658	* 1.9928	* 1.6599	* 1.6904	* 1.5789	* 2.9470
9	* 1.6423	* 1.9759	* 1.7190	* 2.0149	* 1.8724	* 2.1879	* 2.1459	* 1.0223
	* 2.1589	* 1.7745	* 1.9909	* 1.6997	* 1.7868	* 1.5210	* 1.5573	* 2.8586
10	* 1.6663	* 1.7146	* 2.0328	* 1.9634	* 2.1338	* 2.1548	* 2.1715	* 0.9779
	* 2.0658	* 2.0028	* 1.7180	* 1.7683	* 1.6073	* 1.5890	* 1.5612	* 3.0431
11	* 1.6523	* 2.0095	* 1.9569	* 2.1156	* 2.0880	* 2.1232	* 2.1091	* 0.9160
	* 1.9928	* 1.7039	* 1.7741	* 1.6964	* 1.7203	* 1.7094	* 1.6961	* 3.3409
12	* 1.9805	* 1.8707	* 2.1314	* 2.0872	* 2.0798	* 2.0744	* 1.2328	*
	* 1.6599	* 1.7877	* 1.6090	* 1.7208	* 1.7081	* 1.7079	* 2.5969	*
13	* 1.9371	* 2.1862	* 2.1529	* 2.1210	* 2.0728	* 1.3391	* 0.6758	*
	* 1.6904	* 1.5217	* 1.5901	* 1.7108	* 1.7091	* 2.5763	* 4.6228	*
14	* 2.0777	* 2.1442	* 2.1697	* 2.1066	* 1.2317	* 0.6607	*	*
	* 1.5789	* 1.5581	* 1.5623	* 1.6980	* 2.5987	* 4.6871	*	*
15	* 0.9813	* 1.0221	* 0.9769	* 0.9148	* F-SUB-Q			
	* 2.9470	* 2.8592	* 3.0461	* 3.3444	* M-SUB-Q			

AT 30% POWER, 4 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.6216	* 1.5956	* 1.6252	* 1.6060	* 1.9407	* 1.8992	* 2.0469	* 0.9631
	* 2.2357	* 2.2883	* 2.1789	* 2.1068	* 1.7361	* 1.7641	* 1.6405	* 3.0814
9	* 1.5956	* 1.9272	* 1.6699	* 1.9732	* 1.8250	* 2.1478	* 2.1166	* 1.0049
	* 2.2883	* 1.8736	* 2.1075	* 1.7829	* 1.8820	* 1.5835	* 1.6161	* 2.9831
10	* 1.6252	* 1.6654	* 1.9780	* 1.9192	* 2.1021	* 2.1120	* 2.1428	* 0.9626
	* 2.1789	* 2.1207	* 1.8130	* 1.8587	* 1.6822	* 1.6600	* 1.6224	* 3.1749
11	* 1.6060	* 1.9676	* 1.9125	* 2.0816	* 2.0474	* 2.0939	* 2.0876	* 0.9030
	* 2.1068	* 1.7876	* 1.8649	* 1.7824	* 1.8131	* 1.7860	* 1.7649	* 3.4917
12	* 1.9407	* 1.8232	* 2.0997	* 2.0466	* 2.0397	* 2.0485	* 1.2202	*
	* 1.7361	* 1.8829	* 1.6841	* 1.8138	* 1.8034	* 1.7928	* 2.7184	*
13	* 1.8992	* 2.1459	* 2.1099	* 2.0916	* 2.0468	* 1.3223	* 0.6660	*
	* 1.7641	* 1.5844	* 1.6613	* 1.7878	* 1.7941	* 2.7159	* 4.8894	*
14	* 2.0469	* 2.1148	* 2.1408	* 2.0850	* 1.2191	* 0.6507	*	*
	* 1.6405	* 1.6170	* 1.6237	* 1.7670	* 2.7204	* 4.9605	*	*
15	* 0.9631	* 1.0046	* 0.9615	* 0.9018	* F-SUB-Q			
	* 3.0814	* 2.9838	* 3.1782	* 3.4956	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 290 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 30% POWER, 4 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.5795	* 1.5530	* 1.5918	* 1.5657	* 1.9099	* 1.8655	* 2.0234	* 0.9365
	* 2.3682	* 2.4198	* 2.3101	* 2.2442	* 1.8284	* 1.8586	* 1.7168	* 3.2784
9	* 1.5530	* 1.8881	* 1.6265	* 1.9392	* 1.7829	* 2.1137	* 2.0936	* 0.9779
	* 2.4198	* 1.9848	* 2.2457	* 1.8836	* 1.9991	* 1.6650	* 1.6924	* 3.1716
10	* 1.5918	* 1.6219	* 1.9315	* 1.8800	* 2.0759	* 2.0779	* 2.1203	* 0.9376
	* 2.3101	* 2.2604	* 1.9268	* 1.9704	* 1.7725	* 1.7491	* 1.6997	* 3.3823
11	* 1.5657	* 1.9335	* 1.8732	* 2.0534	* 2.0108	* 2.0705	* 2.0684	* 0.8794
	* 2.2442	* 1.8888	* 1.9773	* 1.8696	* 1.9091	* 1.8520	* 1.8423	* 3.7276
12	* 1.9099	* 1.7811	* 2.0733	* 2.0100	* 2.0045	* 2.0258	* 1.1894	*
	* 1.8284	* 2.0001	* 1.7746	* 1.9098	* 1.9007	* 1.8787	* 2.8863	*
13	* 1.8655	* 2.1116	* 2.0758	* 2.0681	* 2.0241	* 1.2939	* 0.6471	*
	* 1.8586	* 1.6660	* 1.7508	* 1.8540	* 1.8801	* 2.8811	* 5.2262	*
14	* 2.0234	* 2.0916	* 2.1182	* 2.0657	* 1.1884	* 0.6313	*	*
	* 1.7168	* 1.6934	* 1.7012	* 1.8445	* 2.8883	* 5.3099	*	*
15	* 0.9365	* 0.9777	* 0.9365	* 0.8782	* F-SUB-Q			
	* 3.2784	* 3.1724	* 3.3859	* 3.7320	* M-SUB-Q			

AT 30% POWER, 4 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.5268	* 1.5002	* 1.5433	* 1.5152	* 1.8595	* 1.8167	* 1.9770	* 0.9080
	* 2.5388	* 2.5976	* 2.5021	* 2.4353	* 1.9696	* 1.9994	* 1.8399	* 3.5411
9	* 1.5002	* 1.8310	* 1.5728	* 1.8859	* 1.7282	* 2.0606	* 2.0465	* 0.9488
	* 2.5976	* 2.1494	* 2.4395	* 2.0337	* 2.1644	* 1.7887	* 1.8142	* 3.4243
10	* 1.5433	* 1.5682	* 1.8704	* 1.8260	* 2.0263	* 2.0254	* 2.0732	* 0.9107
	* 2.5021	* 2.4560	* 2.0892	* 2.1308	* 1.9095	* 1.8816	* 1.8223	* 3.6538
11	* 1.5152	* 1.8802	* 1.8192	* 2.0025	* 1.9565	* 2.0232	* 2.0250	* 0.8543
	* 2.4353	* 2.0395	* 2.1386	* 1.9794	* 2.0264	* 1.9636	* 1.9512	* 4.0299
12	* 1.8595	* 1.7263	* 2.0237	* 1.9558	* 1.9511	* 1.9798	* 1.1569	*
	* 1.9696	* 2.1655	* 1.9118	* 2.0271	* 2.0188	* 1.9872	* 3.0677	*
13	* 1.8167	* 2.0584	* 2.0230	* 2.0206	* 1.9781	* 1.2589	* 0.6279	*
	* 1.9994	* 1.7898	* 1.8836	* 1.9658	* 1.9888	* 3.0775	* 5.5891	*
14	* 1.9770	* 2.0444	* 2.0710	* 2.0222	* 1.1559	* 0.6119	*	*
	* 1.8399	* 1.8154	* 1.8241	* 1.9537	* 3.0697	* 5.6852	*	*
15	* 0.9080	* 0.9485	* 0.9095	* 0.8530	* F-SUB-Q			
	* 3.5411	* 3.4252	* 3.6580	* 4.0350	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 291 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 30% POWER, 4 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4779	* 1.4510	* 1.4996	* 1.4680	* 1.8135	* 1.7691	* 1.9331	* 0.8782
	* 2.7764	* 2.8348	* 2.7261	* 2.6518	* 2.1244	* 2.1571	* 1.9767	* 3.8319
9	* 1.4510	* 1.7793	* 1.5225	* 1.8367	* 1.6765	* 2.0095	* 2.0012	* 0.9165
	* 2.8348	* 2.3174	* 2.6725	* 2.2075	* 2.3484	* 1.9281	* 1.9503	* 3.7104
10	* 1.4996	* 1.5179	* 1.8140	* 1.7746	* 1.9790	* 1.9738	* 2.0278	* 0.8815
	* 2.7261	* 2.6908	* 2.2857	* 2.3209	* 2.0634	* 2.0323	* 1.9597	* 3.9519
11	* 1.4680	* 1.8310	* 1.7677	* 1.9544	* 1.9039	* 1.9778	* 1.9815	* 0.8255
	* 2.6518	* 2.2139	* 2.3295	* 2.1328	* 2.1905	* 2.1088	* 2.0883	* 4.3696
12	* 1.8135	* 1.6746	* 1.9764	* 1.9032	* 1.8995	* 1.9350	* 1.1199	*
	* 2.1244	* 2.3496	* 2.0660	* 2.1913	* 2.1855	* 2.1379	* 3.3302	*
13	* 1.7691	* 2.0072	* 1.9712	* 1.9752	* 1.9333	* 1.2203	* 0.6072	*
	* 2.1571	* 1.9295	* 2.0347	* 2.1114	* 2.1397	* 3.3370	* 6.0635	*
14	* 1.9331	* 1.9990	* 2.0254	* 1.9786	* 1.1189	* 0.5909	*	*
	* 1.9767	* 1.9516	* 1.9617	* 2.0911	* 3.3324	* 6.1752	*	*
15	* 0.8782	* 0.9161	* 0.8803	* 0.8242	* F-SUB-Q			
	* 3.8319	* 3.7115	* 3.9567	* 4.3753	* M-SUB-Q			

AT 30% POWER, 4 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.4081	* 1.3821	* 1.4251	* 1.4004	* 1.7276	* 1.6942	* 1.8459	* 0.8519
	* 3.0934	* 3.1489	* 3.0095	* 2.9133	* 2.3294	* 2.3535	* 2.1630	* 4.1282
9	* 1.3821	* 1.6905	* 1.4518	* 1.7500	* 1.6014	* 1.9228	* 1.9122	* 0.8908
	* 3.1489	* 2.5794	* 2.9447	* 2.4317	* 2.5675	* 2.1037	* 2.1306	* 3.9824
10	* 1.4251	* 1.4469	* 1.7291	* 1.6956	* 1.8898	* 1.8889	* 1.9374	* 0.8555
	* 3.0095	* 2.9652	* 2.5196	* 2.5536	* 2.2594	* 2.2136	* 2.1368	* 4.2263
11	* 1.4004	* 1.7444	* 1.6889	* 1.8653	* 1.8204	* 1.8882	* 1.8956	* 0.8035
	* 2.9133	* 2.4387	* 2.5631	* 2.3735	* 2.4336	* 2.3261	* 2.3009	* 4.6479
12	* 1.7276	* 1.5996	* 1.8871	* 1.8197	* 1.8166	* 1.8491	* 1.0925	*
	* 2.3294	* 2.5689	* 2.2623	* 2.4344	* 2.4383	* 2.3843	* 3.6185	*
13	* 1.6942	* 1.9204	* 1.8861	* 1.8856	* 1.8474	* 1.1812	* 0.5916	*
	* 2.3535	* 2.1054	* 2.2164	* 2.3291	* 2.3864	* 3.6770	* 6.6259	*
14	* 1.8459	* 1.9099	* 1.9350	* 1.8926	* 1.0913	* 0.5760	*	*
	* 2.1630	* 2.1321	* 2.1390	* 2.3041	* 3.6216	* 6.7459	*	*
15	* 0.8519	* 0.8904	* 0.8543	* 0.8021	* F-SUB-Q			
	* 4.1282	* 3.9837	* 4.2317	* 4.6543	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 292 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 30% POWER, 4 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3681	* 1.3415	* 1.3931	* 1.3608	* 1.6950	* 1.6546	* 1.8152	* 0.8173
	* 3.4035	* 3.4698	* 3.1933	* 3.1065	* 2.4624	* 2.4953	* 2.2754	* 4.4312
9	* 1.3415	* 1.6537	* 1.4099	* 1.7136	* 1.5576	* 1.8823	* 1.8799	* 0.8543
	* 3.4698	* 2.7714	* 3.1509	* 2.5752	* 2.7423	* 2.2265	* 2.2461	* 4.2840
10	* 1.3931	* 1.4055	* 1.6837	* 1.6536	* 1.8549	* 1.8471	* 1.9052	* 0.8220
	* 3.1933	* 3.1732	* 2.6910	* 2.7166	* 2.3954	* 2.3546	* 2.2585	* 4.5662
11	* 1.3608	* 1.7080	* 1.6469	* 1.8297	* 1.7770	* 1.8557	* 1.8631	* 0.7705
	* 3.1065	* 2.5825	* 2.7270	* 2.5778	* 2.6571	* 2.5295	* 2.4664	* 5.0372
12	* 1.6950	* 1.5557	* 1.8521	* 1.7763	* 1.7742	* 1.8157	* 1.0465	*
	* 2.4624	* 2.7437	* 2.3987	* 2.6580	* 2.6570	* 2.5835	* 4.0239	*
13	* 1.6546	* 1.8797	* 1.8442	* 1.8530	* 1.8139	* 1.1398	* 0.5660	*
	* 2.4953	* 2.2283	* 2.3578	* 2.5328	* 2.5857	* 4.0641	* 7.3654	*
14	* 1.8152	* 1.8775	* 1.9026	* 1.8601	* 1.0454	* 0.5500	*	*
	* 2.2753	* 2.2478	* 2.2611	* 2.4700	* 4.0268	* 7.5132	*	*
15	* 0.8173	* 0.8539	* 0.8207	* 0.7691	* F-SUB-Q			
	* 4.4312	* 4.2855	* 4.5721	* 5.0444	* M-SUB-Q			

AT 30% POWER, 4 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.3148	* 1.2886	* 1.3412	* 1.3085	* 1.6364	* 1.5976	* 1.7559	* 0.7871
	* 3.5498	* 3.6137	* 3.4653	* 3.3728	* 2.6613	* 2.6951	* 2.4515	* 4.7849
9	* 1.2886	* 1.5923	* 1.3552	* 1.6528	* 1.4989	* 1.8183	* 1.8187	* 0.8236
	* 3.6137	* 2.9437	* 3.4303	* 2.7901	* 2.9738	* 2.4022	* 2.4204	* 4.6217
10	* 1.3412	* 1.3509	* 1.6196	* 1.5941	* 1.7925	* 1.7837	* 1.8435	* 0.7925
	* 3.4653	* 3.4550	* 2.9283	* 2.9477	* 2.5903	* 2.5438	* 2.4337	* 4.9260
11	* 1.3085	* 1.6472	* 1.5874	* 1.7672	* 1.7137	* 1.7946	* 1.8035	* 0.7430
	* 3.3728	* 2.7977	* 2.9591	* 2.7402	* 2.8283	* 2.6838	* 2.6623	* 5.4448
12	* 1.6364	* 1.4970	* 1.7897	* 1.7131	* 1.7115	* 1.7557	* 1.0097	*
	* 2.6613	* 2.9755	* 2.5939	* 2.8293	* 2.8427	* 2.7606	* 4.3122	*
13	* 1.5976	* 1.8156	* 1.7807	* 1.7918	* 1.7539	* 1.0996	* 0.5456	*
	* 2.6951	* 2.4043	* 2.5475	* 2.6878	* 2.7633	* 4.3750	* 7.9753	*
14	* 1.7559	* 1.8162	* 1.8408	* 1.8005	* 1.0087	* 0.5297	*	*
	* 2.4515	* 2.4223	* 2.4366	* 2.6662	* 4.3158	* 8.1416	*	*
15	* 0.7871	* 0.8232	* 0.7912	* 0.7416	* F-SUB-Q			
	* 4.7849	* 4.6234	* 4.9325	* 5.4528	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 293 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 30% POWER, 4 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2516	* 1.2263	* 1.2742	* 1.2467	* 1.5575	* 1.5275	* 1.6752	* 0.7600
	* 3.5842	* 3.6494	* 3.4716	* 3.3877	* 2.7049	* 2.7472	* 2.5169	* 4.8944
9	* 1.2263	* 1.5124	* 1.2911	* 1.5732	* 1.4296	* 1.7374	* 1.7358	* 0.7961
	* 3.6494	* 2.9775	* 3.4235	* 2.8255	* 3.0098	* 2.4618	* 2.4915	* 4.7204
10	* 1.2742	* 1.2862	* 1.5423	* 1.5208	* 1.7094	* 1.7039	* 1.7592	* 0.7653
	* 3.4716	* 3.4484	* 2.9447	* 2.9758	* 2.6497	* 2.6224	* 2.5198	* 5.0693
11	* 1.2467	* 1.5678	* 1.5142	* 1.6845	* 1.6356	* 1.7114	* 1.7225	* 0.7183
	* 3.3877	* 2.8346	* 2.9881	* 2.7661	* 2.8510	* 2.7060	* 2.6848	* 5.6492
12	* 1.5575	* 1.4277	* 1.7067	* 1.6350	* 1.6343	* 1.6753	* 0.9792	*
	* 2.7049	* 3.0118	* 2.6540	* 2.8520	* 2.8653	* 2.7851	* 4.2808	*
13	* 1.5275	* 1.7346	* 1.7007	* 1.7085	* 1.6735	* 1.0597	* 0.5285	*
	* 2.7472	* 2.4642	* 2.6274	* 2.7103	* 2.7879	* 4.3729	* 7.9317	*
14	* 1.6752	* 1.7332	* 1.7564	* 1.7194	* 0.9780	* 0.5132	*	*
	* 2.5169	* 2.4939	* 2.5234	* 2.6894	* 4.2853	* 8.0957	*	*
15	* 0.7600	* 0.7957	* 0.7640	* 0.7169	* F-SUB-Q			
	* 4.8944	* 4.7227	* 5.0763	* 5.6594	* M-SUB-Q			

AT 30% POWER, 4 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.2119	* 1.1862	* 1.2405	* 1.2065	* 1.5214	* 1.4857	* 1.6401	* 0.7261
	* 3.4465	* 3.5013	* 3.2844	* 3.2281	* 2.5562	* 2.6069	* 2.3738	* 4.7305
9	* 1.1862	* 1.4737	* 1.2491	* 1.5340	* 1.3841	* 1.6937	* 1.6991	* 0.7602
	* 3.5013	* 2.8385	* 3.2543	* 2.6717	* 2.8691	* 2.3305	* 2.3510	* 4.5696
10	* 1.2405	* 1.2449	* 1.4956	* 1.4773	* 1.6706	* 1.6596	* 1.7228	* 0.7325
	* 3.2844	* 3.2787	* 2.7943	* 2.8222	* 2.5037	* 2.4848	* 2.3751	* 4.9055
11	* 1.2065	* 1.5286	* 1.4708	* 1.6453	* 1.5900	* 1.6751	* 1.6858	* 0.6860
	* 3.2281	* 2.6804	* 2.8342	* 2.6712	* 2.7695	* 2.6131	* 2.5884	* 5.4634
12	* 1.5214	* 1.3823	* 1.6678	* 1.5894	* 1.5895	* 1.6377	* 0.9345	*
	* 2.5562	* 2.8712	* 2.5080	* 2.7704	* 2.7875	* 2.6862	* 4.1954	*
13	* 1.4857	* 1.6909	* 1.6563	* 1.6722	* 1.6360	* 1.0184	* 0.5037	*
	* 2.6069	* 2.3329	* 2.4897	* 2.6172	* 2.6888	* 4.2564	* 7.7054	*
14	* 1.6401	* 1.6965	* 1.7199	* 1.6827	* 0.9334	* 0.4882	*	*
	* 2.3738	* 2.3534	* 2.3787	* 2.5928	* 4.1991	* 7.8794	*	*
15	* 0.7261	* 0.7598	* 0.7312	* 0.6846	* F-SUB-Q			
	* 4.7305	* 4.5719	* 4.9138	* 5.4739	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 294 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 30% POWER, 4 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1654 *	* 1.1400 *	* 1.1955 *	* 1.1602 *	* 1.4696 *	* 1.4347 *	* 1.5880 *	* 0.6968 *
	* 3.1296 *	* 3.1834 *	* 3.0338 *	* 3.0355 *	* 2.4172 *	* 2.4742 *	* 2.2477 *	* 4.4848 *
9	* 1.1400 *	* 1.4207 *	* 1.2011 *	* 1.4803 *	* 1.3315 *	* 1.6369 *	* 1.6453 *	* 0.7295 *
	* 3.1834 *	* 2.5797 *	* 3.0426 *	* 2.5062 *	* 2.7203 *	* 2.2109 *	* 2.2262 *	* 4.3312 *
10	* 1.1955 *	* 1.1970 *	* 1.4392 *	* 1.4240 *	* 1.6151 *	* 1.6028 *	* 1.6683 *	* 0.7035 *
	* 3.0338 *	* 3.0522 *	* 2.5966 *	* 2.6316 *	* 2.3618 *	* 2.3559 *	* 2.2445 *	* 4.6340 *
11	* 1.1602 *	* 1.4750 *	* 1.4175 *	* 1.5897 *	* 1.5331 *	* 1.6216 *	* 1.6327 *	* 0.6576 *
	* 3.0355 *	* 2.5144 *	* 2.6426 *	* 2.4212 *	* 2.5143 *	* 2.3623 *	* 2.3408 *	* 5.1347 *
12	* 1.4696 *	* 1.3297 *	* 1.6123 *	* 1.5325 *	* 1.5335 *	* 1.5841 *	* 0.8975 *	
	* 2.4172 *	* 2.7221 *	* 2.3659 *	* 2.5151 *	* 2.5311 *	* 2.4337 *	* 3.8293 *	
13	* 1.4347 *	* 1.6340 *	* 1.5993 *	* 1.6186 *	* 1.5824 *	* 0.9788 *	* 0.4831 *	
	* 2.4742 *	* 2.2133 *	* 2.3604 *	* 2.3662 *	* 2.4361 *	* 3.8859 *	* 7.0555 *	
14	* 1.5880 *	* 1.6425 *	* 1.6654 *	* 1.6295 *	* 0.8965 *	* 0.4677 *		
	* 2.2477 *	* 2.2286 *	* 2.2479 *	* 2.3449 *	* 3.8326 *	* 7.2224 *		
15	* 0.6968 *	* 0.7291 *	* 0.7022 *	* 0.6562 *	* F-SUB-Q			
	* 4.4848 *	* 4.3335 *	* 4.6420 *	* 5.1446 *	* M-SUB-Q			

AT 30% POWER, 4 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.1190 *	* 1.0941 *	* 1.1486 *	* 1.1137 *	* 1.4138 *	* 1.3810 *	* 1.5299 *	* 0.6712 *
	* 2.8650 *	* 2.9145 *	* 2.7438 *	* 2.7289 *	* 2.1702 *	* 2.2225 *	* 2.0169 *	* 4.0366 *
9	* 1.0941 *	* 1.3650 *	* 1.1530 *	* 1.4236 *	* 1.2786 *	* 1.5759 *	* 1.5850 *	* 0.7038 *
	* 2.9145 *	* 2.3503 *	* 2.7297 *	* 2.2456 *	* 2.4455 *	* 1.9848 *	* 1.9957 *	* 3.8918 *
10	* 1.1486 *	* 1.1491 *	* 1.3819 *	* 1.3694 *	* 1.5550 *	* 1.5425 *	* 1.6074 *	* 0.6782 *
	* 2.7438 *	* 2.7504 *	* 2.3487 *	* 2.3722 *	* 2.1160 *	* 2.1090 *	* 2.0087 *	* 4.1570 *
11	* 1.1137 *	* 1.4184 *	* 1.3630 *	* 1.5301 *	* 1.4744 *	* 1.5617 *	* 1.5734 *	* 0.6352 *
	* 2.7289 *	* 2.2532 *	* 2.3826 *	* 2.2207 *	* 2.3070 *	* 2.1584 *	* 2.1374 *	* 4.6026 *
12	* 1.4138 *	* 1.2768 *	* 1.5522 *	* 1.4738 *	* 1.4749 *	* 1.5256 *	* 0.8664 *	
	* 2.1702 *	* 2.4472 *	* 2.1197 *	* 2.3078 *	* 2.3252 *	* 2.2338 *	* 3.5038 *	
13	* 1.3810 *	* 1.5729 *	* 1.5391 *	* 1.5588 *	* 1.5239 *	* 0.9443 *	* 0.4659 *	
	* 2.2225 *	* 1.9870 *	* 2.1134 *	* 2.1621 *	* 2.2361 *	* 3.5666 *	* 6.4883 *	
14	* 1.5299 *	* 1.5823 *	* 1.6044 *	* 1.5702 *	* 0.8654 *	* 0.4510 *		
	* 2.0169 *	* 1.9978 *	* 2.0120 *	* 2.1414 *	* 3.5072 *	* 6.6436 *		
15	* 0.6712 *	* 0.7033 *	* 0.6769 *	* 0.6338 *	* F-SUB-Q			
	* 4.0366 *	* 3.8939 *	* 4.1644 *	* 4.6119 *	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 295 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 30% POWER, 4 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0707	* 1.0468	* 1.0968	* 1.0658	* 1.3502	* 1.3236	* 1.4629	* 0.6500 *
	* 2.8299	* 2.8805	* 2.7045	* 2.6883	* 2.1436	* 2.1883	* 1.9908	* 3.9515 *
9	* 1.0468	* 1.3027	* 1.1034	* 1.3601	* 1.2243	* 1.5089	* 1.5159	* 0.6823 *
	* 2.8805	* 2.3209	* 2.6806	* 2.2106	* 2.4073	* 1.9525	* 1.9668	* 3.8000 *
10	* 1.0968	* 1.0993	* 1.3214	* 1.3110	* 1.4864	* 1.4767	* 1.5369	* 0.6564 *
	* 2.7045	* 2.7013	* 2.3048	* 2.3266	* 2.0838	* 2.0699	* 1.9760	* 4.0535 *
11	* 1.0658	* 1.3551	* 1.3049	* 1.4621	* 1.4107	* 1.4928	* 1.5055	* 0.6155 *
	* 2.6883	* 2.2182	* 2.3369	* 2.2022	* 2.2835	* 2.1383	* 2.1156	* 4.4712 *
12	* 1.3502	* 1.2225	* 1.4836	* 1.4102	* 1.4116	* 1.4588	* 0.8416 *	
	* 2.1436	* 2.4091	* 2.0877	* 2.2843	* 2.3014	* 2.2139	* 3.4216 *	
13	* 1.3236	* 1.5062	* 1.4732	* 1.4900	* 1.4571	* 0.9120	* 0.4521 *	
	* 2.1883	* 1.9548	* 2.0747	* 2.1421	* 2.2163	* 3.5088	* 6.3562 *	
14	* 1.4629	* 1.5132	* 1.5339	* 1.5024	* 0.8405	* 0.4378 *		
	* 1.9908	* 1.9690	* 1.9794	* 2.1196	* 3.4254	* 6.5052 *		
15	* 0.6500	* 0.6819	* 0.6551	* 0.6141	* F-SUB-Q			
	* 3.9515	* 3.8021	* 4.0611	* 4.4805	* M-SUB-Q			

AT 30% POWER, 4 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0450	* 1.0206	* 1.0766	* 1.0387	* 1.3272	* 1.2934	* 1.4392	* 0.6227 *
	* 2.5555	* 2.6002	* 2.4268	* 2.4342	* 1.9267	* 1.9787	* 1.7891	* 3.6547 *
9	* 1.0206	* 1.2797	* 1.0759	* 1.3352	* 1.1917	* 1.4778	* 1.4905	* 0.6530 *
	* 2.6002	* 2.0714	* 2.4151	* 1.9819	* 2.1823	* 1.7592	* 1.7667	* 3.5209 *
10	* 1.0766	* 1.0721	* 1.2903	* 1.2815	* 1.4597	* 1.4445	* 1.5116	* 0.6296 *
	* 2.4268	* 2.4343	* 2.0704	* 2.0902	* 1.8680	* 1.8615	* 1.7690	* 3.7326 *
11	* 1.0387	* 1.3302	* 1.2754	* 1.4355	* 1.3781	* 1.4679	* 1.4789	* 0.5880 *
	* 2.4342	* 1.9889	* 2.0997	* 1.9889	* 2.0686	* 1.9056	* 1.8850	* 4.1190 *
12	* 1.3272	* 1.1899	* 1.4570	* 1.3776	* 1.3790	* 1.4321	* 0.8040 *	
	* 1.9267	* 2.1839	* 1.8715	* 2.0707	* 2.0800	* 1.9978	* 3.1622 *	
13	* 1.2934	* 1.4757	* 1.4409	* 1.4650	* 1.4305	* 0.8780	* 0.4317 *	
	* 1.9787	* 1.7614	* 1.8657	* 1.9090	* 2.0000	* 3.2233	* 5.9105 *	
14	* 1.4392	* 1.4878	* 1.5086	* 1.4758	* 0.8031	* 0.4172 *		
	* 1.7891	* 1.7688	* 1.7721	* 1.8887	* 3.1652	* 6.0615 *		
15	* 0.6227	* 0.6526	* 0.6283	* 0.5866	* F-SUB-Q			
	* 3.6547	* 3.5230	* 3.7396	* 4.1278	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 296 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 30% POWER, 4 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 1.0135	* 0.9893	* 1.0445	* 1.0064	* 1.2871	* 1.2537	* 1.3955	* 0.6019
	* 2.3159	* 2.3722	* 2.2244	* 2.2473	* 1.7792	* 1.8291	* 1.6536	* 3.4004
9	* 0.9893	* 1.2417	* 1.0432	* 1.2948	* 1.1540	* 1.4332	* 1.4448	* 0.6313
	* 2.3722	* 1.8904	* 2.2165	* 1.8207	* 2.0159	* 1.6226	* 1.6294	* 3.2735
10	* 1.0445	* 1.0394	* 1.2513	* 1.2428	* 1.4143	* 1.3995	* 1.4650	* 0.6084
	* 2.2244	* 2.2343	* 1.8959	* 1.9153	* 1.7172	* 1.7108	* 1.6272	* 3.4561
11	* 1.0064	* 1.2899	* 1.2368	* 1.3911	* 1.3347	* 1.4221	* 1.4319	* 0.5679
	* 2.2473	* 1.8272	* 1.9241	* 1.8071	* 1.8826	* 1.7529	* 1.7314	* 3.7990
12	* 1.2871	* 1.1523	* 1.4116	* 1.3343	* 1.3355	* 1.3867	* 0.7767	*
	* 1.7792	* 2.0173	* 1.7205	* 1.8832	* 1.8896	* 1.8173	* 2.9028	*
13	* 1.2537	* 1.4311	* 1.3960	* 1.4192	* 1.3851	* 0.8486	* 0.4170	*
	* 1.8291	* 1.6247	* 1.7147	* 1.7561	* 1.8193	* 2.9473	* 5.4103	*
14	* 1.3955	* 1.4421	* 1.4620	* 1.4288	* 0.7758	* 0.4028	*	*
	* 1.6536	* 1.6317	* 1.6301	* 1.7349	* 2.9056	* 5.5506	*	*
15	* 0.6019	* 0.6309	* 0.6072	* 0.5665	* F-SUB-Q			
	* 3.4004	* 3.2755	* 3.4627	* 3.8073	* M-SUB-Q			

AT 30% POWER, 4 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9748	* 0.9516	* 0.9982	* 0.9684	* 1.2270	* 1.2025	* 1.3277	* 0.5876
	* 2.1859	* 2.2430	* 2.0956	* 2.1196	* 1.6962	* 1.7338	* 1.5799	* 3.1820
9	* 0.9516	* 1.1860	* 1.0040	* 1.2363	* 1.1101	* 1.3716	* 1.3744	* 0.6171
	* 2.2430	* 1.7777	* 2.0785	* 1.7223	* 1.9010	* 1.5382	* 1.5524	* 3.0546
10	* 0.9982	* 1.0004	* 1.2026	* 1.1935	* 1.3466	* 1.3395	* 1.3929	* 0.5928
	* 2.0956	* 2.0884	* 1.7761	* 1.7963	* 1.6269	* 1.6133	* 1.5466	* 3.2203
11	* 0.9684	* 1.2316	* 1.1877	* 1.3258	* 1.2790	* 1.3515	* 1.3603	* 0.5548
	* 2.1196	* 1.7284	* 1.8046	* 1.7167	* 1.7799	* 1.6481	* 1.6299	* 3.5116
12	* 1.2270	* 1.1084	* 1.3440	* 1.2786	* 1.2790	* 1.3189	* 0.7594	*
	* 1.6962	* 1.9039	* 1.6299	* 1.7804	* 1.7833	* 1.7280	* 2.6918	*
13	* 1.2025	* 1.3697	* 1.3362	* 1.3487	* 1.3174	* 0.8227	* 0.4080	*
	* 1.7338	* 1.5402	* 1.6170	* 1.6512	* 1.7299	* 2.7453	* 5.0095	*
14	* 1.3277	* 1.3719	* 1.3901	* 1.3573	* 0.7583	* 0.3949	*	*
	* 1.5799	* 1.5546	* 1.5493	* 1.6332	* 2.6952	* 5.1311	*	*
15	* 0.5876	* 0.6167	* 0.5915	* 0.5534	* F-SUB-Q			
	* 3.1820	* 3.0564	* 3.2263	* 3.5192	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 297 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 30% POWER, 4 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.9546	* 0.9323	* 0.9815	* 0.9537	* 1.2002	* 1.1746	* 1.2945	* 0.5676 *
	* 2.0118	* 2.0555	* 1.9433	* 1.9808	* 1.5983	* 1.6364	* 1.4941	* 3.0444 *
9	* 0.9323	* 1.1625	* 0.9852	* 1.2114	* 1.0868	* 1.3383	* 1.3381	* 0.5950 *
	* 2.0555	* 1.6527	* 1.9372	* 1.6106	* 1.7833	* 1.4509	* 1.4664	* 2.9294 *
10	* 0.9815	* 0.9818	* 1.1795	* 1.1706	* 1.3130	* 1.3074	* 1.3561	* 0.5714 *
	* 1.9433	* 1.9431	* 1.6550	* 1.6732	* 1.5264	* 1.5134	* 1.4565	* 3.0752 *
11	* 0.9537	* 1.2069	* 1.1652	* 1.2930	* 1.2497	* 1.3167	* 1.3209	* 0.5327 *
	* 1.9808	* 1.6162	* 1.6807	* 1.5928	* 1.6451	* 1.5391	* 1.5304	* 3.3508 *
12	* 1.2002	* 1.0853	* 1.3105	* 1.2493	* 1.2488	* 1.2828	* 0.7278 *	
	* 1.5983	* 1.7855	* 1.5292	* 1.6456	* 1.6585	* 1.6112	* 2.5381 *	
13	* 1.1746	* 1.3363	* 1.3042	* 1.3141	* 1.2813	* 0.7912	* 0.3921 *	
	* 1.6364	* 1.4528	* 1.5168	* 1.5420	* 1.6130	* 2.6096	* 4.7557 *	
14	* 1.2945	* 1.3357	* 1.3534	* 1.3181	* 0.7267	* 0.3790 *		
	* 1.4941	* 1.4685	* 1.4591	* 1.5334	* 2.5410	* 4.8775 *		
15	* 0.5676	* 0.5946	* 0.5703	* 0.5314	* F-SUB-Q			
	* 3.0444	* 2.9311	* 3.0810	* 3.3581	* M-SUB-Q			

AT 30% POWER, 4 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.8979	* 0.8873	* 0.9508	* 0.9304	* 1.1313	* 1.1123	* 1.2207	* 0.5536 *
	* 1.9807	* 1.9974	* 1.8592	* 1.8976	* 1.5866	* 1.6182	* 1.4825	* 2.9307 *
9	* 0.8873	* 1.1016	* 0.9407	* 1.1597	* 1.0362	* 1.2597	* 1.2569	* 0.5791 *
	* 1.9974	* 1.6177	* 1.8917	* 1.5665	* 1.7466	* 1.4431	* 1.4564	* 2.8266 *
10	* 0.9508	* 0.9349	* 1.1130	* 1.1245	* 1.2426	* 1.2315	* 1.2730	* 0.5523 *
	* 1.8592	* 1.8974	* 1.6323	* 1.6194	* 1.5095	* 1.4959	* 1.4457	* 2.9782 *
11	* 0.9304	* 1.1556	* 1.1194	* 1.2160	* 1.1834	* 1.2417	* 1.2473	* 0.5104 *
	* 1.8976	* 1.5717	* 1.6264	* 1.5532	* 1.5996	* 1.5103	* 1.4980	* 3.2631 *
12	* 1.1313	* 1.0348	* 1.2403	* 1.1830	* 1.1728	* 1.2096	* 0.7063 *	
	* 1.5866	* 1.7488	* 1.5122	* 1.6012	* 1.6251	* 1.5740	* 2.4244 *	
13	* 1.1123	* 1.2572	* 1.2285	* 1.2394	* 1.2082	* 0.7522	* 0.3765 *	
	* 1.6182	* 1.4448	* 1.4992	* 1.5130	* 1.5757	* 2.5228	* 4.5799 *	
14	* 1.2207	* 1.2547	* 1.2706	* 1.2446	* 0.7051	* 0.3636 *		
	* 1.4825	* 1.4585	* 1.4483	* 1.5010	* 2.4278	* 4.7000 *		
15	* 0.5536	* 0.5787	* 0.5512	* 0.5092	* F-SUB-Q			
	* 2.9307	* 2.8282	* 2.9836	* 3.2700	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 298 of 312

TABLE A-4 (CONTINUED)

F-SUB-Q & M-SUB-Q VALUES (F-SUB-Q OP MARGIN) - POWER ESCALATION

AT 30% POWER, 4 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.7375	* 0.7730	* 1.0082	* 0.8253	* 1.1219	* 0.9277	* 1.1522	* 0.5008
	* 2.2654	* 2.1542	* 1.6521	* 2.0287	* 1.5070	* 1.8382	* 1.4832	* 3.0840
9	* 0.7730	* 1.0242	* 0.7986	* 1.0716	* 0.8830	* 1.0575	* 1.1785	* 0.5225
	* 2.1542	* 1.6406	* 2.1071	* 1.5919	* 1.9315	* 1.6227	* 1.4636	* 2.9837
10	* 1.0082	* 0.7932	* 0.9229	* 0.9802	* 1.1439	* 1.0224	* 1.1661	* 0.4838
	* 1.6521	* 2.1129	* 1.8584	* 1.7533	* 1.5323	* 1.7016	* 1.4897	* 3.2236
11	* 0.8253	* 1.0667	* 0.9761	* 1.1335	* 1.0180	* 1.1953	* 1.0986	* 0.4435
	* 2.0287	* 1.5977	* 1.7604	* 1.5578	* 1.7363	* 1.4758	* 1.6006	* 3.5604
12	* 1.1219	* 0.8812	* 1.1416	* 1.0170	* 0.9478	* 1.1071	* 0.6398	*
	* 1.5070	* 1.9350	* 1.5352	* 1.7379	* 1.8927	* 1.6168	* 2.5245	*
13	* 0.9277	* 1.0561	* 1.0200	* 1.1933	* 1.1056	* 0.6527	* 0.3275	*
	* 1.8382	* 1.6248	* 1.7054	* 1.4783	* 1.6188	* 2.7417	* 4.9839	*
14	* 1.1522	* 1.1767	* 1.1639	* 1.0963	* 0.6382	* 0.3167	*	*
	* 1.4832	* 1.4650	* 1.4923	* 1.6038	* 2.5305	* 5.1084	*	*
15	* 0.5008	* 0.5220	* 0.4830	* 0.4424	* F-SUB-Q			
	* 3.0840	* 2.9854	* 3.2286	* 3.5678	* M-SUB-Q			

AT 30% POWER, 4 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
8	* 0.3121	* 0.3370	* 0.4039	* 0.3632	* 0.4384	* 0.3773	* 0.4145	* 0.2127
	* 5.0381	* 4.6631	* 3.8820	* 4.3624	* 3.6234	* 4.2493	* 3.8806	* 6.8828
9	* 0.3370	* 0.3934	* 0.3488	* 0.4305	* 0.3862	* 0.4043	* 0.4203	* 0.2192
	* 4.6631	* 3.9989	* 4.5295	* 3.7202	* 4.1735	* 3.9972	* 3.8437	* 6.7328
10	* 0.4039	* 0.3479	* 0.3655	* 0.4071	* 0.4555	* 0.4029	* 0.4147	* 0.2062
	* 3.8819	* 4.5412	* 4.4139	* 3.9727	* 3.5905	* 4.0612	* 3.9346	* 7.1615
11	* 0.3632	* 0.4291	* 0.4057	* 0.4515	* 0.4080	* 0.4523	* 0.3891	* 0.1840
	* 4.3624	* 3.7324	* 3.9875	* 3.6434	* 4.0497	* 3.6599	* 4.2437	* 8.1191
12	* 0.4384	* 0.3854	* 0.4547	* 0.4074	* 0.3662	* 0.3977	* 0.2688	*
	* 3.6234	* 4.1816	* 3.5977	* 4.0547	* 4.5683	* 4.2121	* 5.6519	*
13	* 0.3773	* 0.4038	* 0.4020	* 0.4515	* 0.3972	* 0.2795	* 0.1394	*
	* 4.2493	* 4.0018	* 4.0697	* 3.6659	* 4.2173	* 6.0334	* 11.1105	*
14	* 0.4145	* 0.4197	* 0.4140	* 0.3882	* 0.2681	* 0.1370	*	*
	* 3.8806	* 3.8472	* 3.9413	* 4.2520	* 5.6660	* 11.2029	*	*
15	* 0.2127	* 0.2190	* 0.2059	* 0.1836	* F-SUB-Q			
	* 6.8828	* 6.7365	* 7.1722	* 8.1355	* M-SUB-Q			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 299 of 312

TABLE A-5

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) POWER ESCALATION

AT 118% POWER, 4 EFPD, THIS IS LEVEL 24 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
*****	*****	*****	*****	*****	*****	*****	*****	*****
8*	3.9205	3.8642	3.0478	3.7759	3.0551	3.8878	3.4061	5.9901
9*	3.8642	3.1658	3.8387	3.0238	3.6435	3.8214	3.3798	5.8634
10*	3.0478	3.8432	3.8010	3.5300	2.9799	3.6813	3.4207	6.1939
11*	3.7759	3.0287	3.5345	2.9789	3.5742	3.0902	3.5633	6.7783
12*	3.0551	3.6488	2.9822	3.5761	3.9411	3.3659	4.6968	
13*	3.8878	3.8236	3.6838	3.0916	3.3680	4.8831	8.3537	
14*	3.4061	3.3806	3.4224	3.5659	4.7022	8.5073		
15 *	5.9901	5.8643	6.1971	6.7837				

AT 118% POWER, 4 EFPD, THIS IS LEVEL 23 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
*****	*****	*****	*****	*****	*****	*****	*****	*****
8*	1.9651	1.9158	1.4275	1.8906	1.4176	1.8596	1.4475	2.7793
9*	1.9158	1.4374	1.9121	1.4279	1.8275	1.7226	1.4292	2.7098
10*	1.4275	1.9137	1.7525	1.7127	1.4130	1.7031	1.4411	2.8803
11*	1.8906	1.4312	1.7158	1.4064	1.6708	1.3833	1.4898	3.0772
12*	1.4176	1.8292	1.4139	1.6717	1.7648	1.4256	2.2032	
13*	1.8596	1.7230	1.7041	1.3838	1.4264	2.3622	3.8658	
14*	1.4475	1.4296	1.4416	1.4908	2.2058	3.9429		
15 *	2.7793	2.7104	2.8822	3.0794				

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 300 of 312

TABLE A-5 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) POWER ESCALATION

AT 118% POWER, 4 EFPD, THIS IS LEVEL 22 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
*****	*****	*****	*****	*****	*****	*****	*****	*****
8*	1.7386	1.7448	1.5934	1.7631	1.5055	1.6490	1.4438	2.5823
9*	1.7448	1.4182	1.7258	1.4147	1.6669	1.5222	1.4133	2.5172
10*	1.5934	1.7281	1.5463	1.5810	1.3927	1.5203	1.3934	2.6019
11*	1.7631	1.4168	1.5833	1.3961	1.5143	1.4051	1.3827	2.7513
12*	1.5055	1.6679	1.3933	1.5147	1.5152	1.3796	2.0484	
13*	1.6490	1.5227	1.5208	1.4056	1.3803	2.1294	3.4845	
14*	1.4438	1.4139	1.3940	1.3837	2.0502	3.5272		
15 *	2.5823	2.5175	2.6036	2.7533				

AT 118% POWER, 4 EFPD, THIS IS LEVEL 21 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
*****	*****	*****	*****	*****	*****	*****	*****	*****
8*	1.6821	1.7056	1.5702	1.7610	1.4398	1.5897	1.3729	2.6159
9*	1.7056	1.3695	1.6864	1.3754	1.6197	1.4476	1.3374	2.5433
10*	1.5702	1.6897	1.4873	1.5440	1.3318	1.4516	1.3167	2.6087
11*	1.7610	1.3774	1.5474	1.3283	1.4548	1.3347	1.3157	2.7478
12*	1.4398	1.6207	1.3324	1.4552	1.4448	1.3149	2.0668	
13*	1.5897	1.4481	1.4522	1.3353	1.3156	2.0890	3.5141	
14*	1.3729	1.3379	1.3172	1.3166	2.0679	3.5603		
15 *	2.6159	2.5436	2.6105	2.7499				

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 301 of 312

TABLE A-5 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) POWER ESCALATION

AT 118% POWER, 4 EFPD, THIS IS LEVEL 20 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
*****	*****	*****	*****	*****	*****	*****	*****	*****
8*	1.7247	1.7525	1.6049	1.8157	1.4534	1.6129	1.3740	2.6843
9*	1.7525	1.3921	1.7321	1.3935	1.6527	1.4552	1.3347	2.5982
10*	1.6049	1.7358	1.5167	1.5712	1.3348	1.4643	1.3131	2.6628
11*	1.8157	1.3961	1.5749	1.3328	1.4696	1.3344	1.3106	2.7986
12*	1.4534	1.6538	1.3355	1.4701	1.4585	1.3144	2.0987	
13*	1.6129	1.4558	1.4649	1.3350	1.3151	2.1116	3.6107	
14*	1.3740	1.3353	1.3137	1.3116	2.0996	3.6578		
15 *	2.6843	2.5985	2.6648	2.8008				

AT 118% POWER, 4 EFPD, THIS IS LEVEL 19 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
*****	*****	*****	*****	*****	*****	*****	*****	*****
8*	1.8047	1.8356	1.6750	1.8974	1.5026	1.6677	1.4098	2.7809
9*	1.8356	1.4493	1.8115	1.4433	1.7167	1.4955	1.3667	2.6873
10*	1.6750	1.8156	1.5782	1.6290	1.3713	1.5086	1.3441	2.7512
11*	1.8974	1.4462	1.6333	1.3715	1.5161	1.3685	1.3396	2.8892
12*	1.5026	1.7180	1.3721	1.5166	1.5037	1.3482	2.1569	
13*	1.6677	1.4962	1.5095	1.3692	1.3490	2.1755	3.7457	
14*	1.4098	1.3674	1.3448	1.3408	2.1580	3.7970		
15 *	2.7809	2.6877	2.7534	2.8917				

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 302 of 312

TABLE A-5 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) POWER ESCALATION

AT 118% POWER, 4 EFPD, THIS IS LEVEL 18 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A

8*	1.8935	1.9278	1.7487	1.9848	1.5524	1.7236	1.4480	2.9178
9*	1.9278	1.5091	1.8970	1.4958	1.7873	1.5403	1.4022	2.8162
10*	1.7487	1.9016	1.6447	1.6927	1.4121	1.5547	1.3782	2.8814
11*	1.9847	1.4990	1.6975	1.4148	1.5696	1.4074	1.3746	3.0298
12*	1.5524	1.7887	1.4130	1.5701	1.5559	1.3880	2.2606	
13*	1.7236	1.5412	1.5557	1.4082	1.3889	2.2721	3.9547	
14*	1.4480	1.4030	1.3790	1.3759	2.2617	4.0149		
15 *	2.9178	2.8167	2.8840	3.0327				

AT 118% POWER, 4 EFPD, THIS IS LEVEL 17 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A

8*	2.0162	2.0517	1.8520	2.0973	1.6272	1.8040	1.5105	3.0730
9*	2.0517	1.5951	2.0098	1.5740	1.8833	1.6100	1.4632	2.9650
10*	1.8520	2.0149	1.7376	1.7840	1.4807	1.6276	1.4386	3.0366
11*	2.0973	1.5776	1.7894	1.4878	1.6534	1.4737	1.4365	3.1988
12*	1.6272	1.8848	1.4818	1.6539	1.6395	1.4575	2.3899	
13*	1.8040	1.6111	1.6288	1.4748	1.4585	2.4059	4.2075	
14*	1.5105	1.4642	1.4396	1.4380	2.3910	4.2766		
15 *	3.0730	2.9657	3.0395	3.2021				

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 303 of 312

TABLE A-5 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) POWER ESCALATION

AT 118% POWER, 4 EFPD, THIS IS LEVEL 16 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A

8*	2.1571	2.1885	1.9607	2.2166	1.7058	1.8918	1.5778	3.2456
9*	2.1885	1.6859	2.1307	1.6573	1.9879	1.6866	1.5294	3.1359
10*	1.9607	2.1363	1.8367	1.8820	1.5552	1.7069	1.5033	3.2135
11*	2.2166	1.6612	1.8879	1.5691	1.7485	1.5457	1.5055	3.3999
12*	1.7058	1.9895	1.5564	1.7490	1.7390	1.5370	2.5424	
13*	1.8918	1.6879	1.7084	1.5469	1.5381	2.5657	4.4947	
14*	1.5778	1.5305	1.5045	1.5071	2.5435	4.5741		
15 *	3.2456	3.1367	3.2168	3.4037				

AT 118% POWER, 4 EFPD, THIS IS LEVEL 15 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A

8*	2.3145	2.3458	2.0986	2.3801	1.8304	2.0171	1.6862	3.4193
9*	2.3458	1.8174	2.2903	1.7790	2.1274	1.7989	1.6341	3.2960
10*	2.0986	2.2964	1.9712	2.0160	1.6703	1.8229	1.6076	3.3895
11*	2.3801	1.7833	2.0223	1.6914	1.8815	1.6601	1.6135	3.5763
12*	1.8304	2.1292	1.6717	1.8820	1.8737	1.6565	2.6812	
13*	2.0171	1.8004	1.8246	1.6615	1.6578	2.7367	4.7566	
14*	1.6862	1.6355	1.6090	1.6153	2.6830	4.8392		
15 *	3.4193	3.2968	3.3931	3.5805				

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 304 of 312

TABLE A-5 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) POWER ESCALATION

AT 118% POWER, 4 EFPD, THIS IS LEVEL 14 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A

8*	2.4179	2.4508	2.1732	2.4817	1.9026	2.1040	1.7470	3.6320
9*	2.4508	1.8806	2.3883	1.8595	2.2352	1.8759	1.6979	3.5042
10*	2.1732	2.3943	2.0736	2.1178	1.7491	1.9064	1.6716	3.6019
11*	2.4817	1.8640	2.1247	1.7750	1.9835	1.7359	1.6874	3.8197
12*	1.9026	2.2371	1.7506	1.9840	1.9750	1.7377	2.8860	
13*	2.1040	1.8776	1.9084	1.7374	1.7390	2.9255	5.1109	
14*	1.7470	1.6994	1.6731	1.6894	2.8875	5.2062		
15 *	3.6320	3.5052	3.6059	3.8243				

AT 118% POWER, 4 EFPD, THIS IS LEVEL 13 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A

8*	2.5302	2.5665	2.2721	2.5975	2.0032	2.2246	1.8428	3.8137
9*	2.5665	1.9636	2.4997	1.9451	2.3643	1.9820	1.7921	3.6811
10*	2.2721	2.5062	2.1750	2.2230	1.8479	2.0159	1.7642	3.8016
11*	2.5975	1.9496	2.2300	1.8788	2.1026	1.8313	1.7788	4.0315
12*	2.0032	2.3662	1.8495	2.1032	2.0945	1.8394	3.0513	
13*	2.2246	1.9834	2.0182	1.8331	1.8408	3.0987	5.3515	
14*	1.8428	1.7938	1.7659	1.7810	3.0526	5.4557		
15 *	3.8137	3.6821	3.8057	4.0364				

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 305 of 312

TABLE A-5 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) POWER ESCALATION

AT 118% POWER, 4 EFPD, THIS IS LEVEL 12 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A

8*	2.5678	2.5991	2.3046	2.6335	2.0335	2.2531	1.8800	3.8906
9*	2.5991	1.9986	2.5317	1.9890	2.3936	2.0194	1.8359	3.7460
10*	2.3046	2.5379	2.2177	2.2628	1.8930	2.0619	1.8115	3.8825
11*	2.6335	1.9942	2.2706	1.9333	2.1609	1.8842	1.8382	4.1309
12*	2.0335	2.3960	1.8949	2.1615	2.1660	1.9076	3.1150	
13*	2.2531	2.0210	2.0646	1.8863	1.9091	3.2052	5.5717	
14*	1.8800	1.8378	1.8135	1.8407	3.1174	5.6792		
15 *	3.8906	3.7475	3.8877	4.1371				

AT 118% POWER, 4 EFPD, THIS IS LEVEL 11 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A

8*	2.4675	2.4989	2.1985	2.5191	1.9422	2.1627	1.7936	3.7774
9*	2.4989	1.9045	2.4255	1.8941	2.3103	1.9342	1.7542	3.6458
10*	2.1985	2.4319	2.1260	2.1706	1.8203	1.9812	1.7312	3.7802
11*	2.5191	1.8989	2.1779	1.8603	2.0880	1.8077	1.7639	4.0400
12*	1.9422	2.3124	1.8223	2.0886	2.0911	1.8326	3.0634	
13*	2.1627	1.9359	1.9840	1.8098	1.8341	3.1240	5.4376	
14*	1.7936	1.7562	1.7333	1.7664	3.0651	5.5527		
15 *	3.7774	3.6472	3.7852	4.0459				

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 306 of 312

TABLE A-5 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) POWER ESCALATION

AT 118% POWER, 4 EFPD, THIS IS LEVEL 10 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
*****	*****	*****	*****	*****	*****	*****	*****	*****
8*	2.3405	2.3689	2.0800	2.3940	1.8389	2.0482	1.6943	3.5968
9*	2.3689	1.8023	2.3016	1.7953	2.1922	1.8325	1.6568	3.4713
10*	2.0800	2.3076	2.0198	2.0599	1.7150	1.8761	1.6341	3.5852
11*	2.3940	1.7998	2.0668	1.7567	1.9773	1.7026	1.6586	3.8297
12*	1.8389	2.1945	1.7169	1.9778	1.9839	1.7296	2.8960	
13*	2.0482	1.8341	1.8789	1.7046	1.7310	2.9639	5.1610	
14*	1.6943	1.6588	1.6361	1.6611	2.8978	5.2755		
15 *	3.5968	3.4727	3.5905	3.8360				

AT 118% POWER, 4 EFPD, THIS IS LEVEL 9 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A
*****	*****	*****	*****	*****	*****	*****	*****	*****
8*	2.2118	2.2403	1.9676	2.2660	1.7313	1.9251	1.5906	3.3954
9*	2.2403	1.7016	2.1762	1.6925	2.0667	1.7181	1.5525	3.2718
10*	1.9676	2.1821	1.9048	1.9400	1.6077	1.7585	1.5302	3.3726
11*	2.2660	1.6969	1.9468	1.6463	1.8536	1.5932	1.5509	3.5922
12*	1.7313	2.0690	1.6096	1.8541	1.8586	1.6176	2.7093	
13*	1.9251	1.7198	1.7615	1.5952	1.6191	2.7719	4.8485	
14*	1.5906	1.5545	1.5323	1.5533	2.7112	4.9578		
15 *	3.3954	3.2733	3.3778	3.5984				

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 307 of 312

TABLE A-5 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) POWER ESCALATION

AT 118% POWER, 4 EFPD, THIS IS LEVEL 8 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A

8*	2.1088	2.1374	1.8839	2.1637	1.6507	1.8264	1.5118	3.2085
9*	2.1374	1.6262	2.0765	1.6145	1.9660	1.6276	1.4730	3.0822
10*	1.8839	2.0821	1.8137	1.8445	1.5263	1.6654	1.4512	3.1777
11*	2.1637	1.6189	1.8512	1.5625	1.7555	1.5101	1.4681	3.3787
12*	1.6507	1.9683	1.5282	1.7559	1.7589	1.5316	2.5341	
13*	1.8264	1.6293	1.6683	1.5121	1.5331	2.6049	4.5576	
14*	1.5118	1.4750	1.4533	1.4705	2.5363	4.6585		
15 *	3.2085	3.0838	3.1828	3.3848				

AT 118% POWER, 4 EFPD, THIS IS LEVEL 7 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A

8*	1.9771	2.0107	1.7644	2.0391	1.5372	1.7077	1.4041	3.0735
9*	2.0107	1.5193	1.9537	1.5075	1.8473	1.5160	1.3667	2.9566
10*	1.7644	1.9594	1.6996	1.7271	1.4183	1.5522	1.3454	3.0370
11*	2.0391	1.5118	1.7337	1.4506	1.6368	1.3993	1.3619	3.2409
12*	1.5372	1.8495	1.4202	1.6372	1.6351	1.4204	2.4240	
13*	1.7077	1.5176	1.5552	1.4013	1.4218	2.4686	4.3767	
14*	1.4041	1.3687	1.3475	1.3642	2.4258	4.4830		
15 *	3.0735	2.9582	3.0421	3.2470				

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 308 of 312

TABLE A-5 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) POWER ESCALATION

AT 118% POWER, 4 EFPD, THIS IS LEVEL 6 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A

8*	1.8609	1.8974	1.6673	1.9299	1.4527	1.6197	1.3306	2.9242
9*	1.8974	1.4321	1.8449	1.4207	1.7500	1.4341	1.2932	2.8142
10*	1.6673	1.8506	1.5997	1.6255	1.3425	1.4683	1.2724	2.8967
11*	1.9299	1.4250	1.6319	1.3711	1.5468	1.3225	1.2880	3.0952
12*	1.4527	1.7520	1.3443	1.5472	1.5423	1.3417	2.3056	
13*	1.6197	1.4358	1.4713	1.3245	1.3430	2.3429	4.1596	
14*	1.3306	1.2951	1.2745	1.2903	2.3074	4.2627		
15 *	2.9242	2.8157	2.9014	3.1009				

AT 118% POWER, 4 EFPD, THIS IS LEVEL 5 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A

8*	1.7848	1.8206	1.6110	1.8496	1.4000	1.5564	1.2901	2.7661
9*	1.8206	1.3817	1.7678	1.3686	1.6724	1.3809	1.2529	2.6551
10*	1.6110	1.7733	1.5301	1.5552	1.2975	1.4132	1.2329	2.7400
11*	1.8496	1.3727	1.5615	1.3215	1.4842	1.2820	1.2488	2.9196
12*	1.4000	1.6744	1.2992	1.4846	1.4832	1.2993	2.1701	
13*	1.5564	1.3826	1.4161	1.2839	1.3006	2.2206	3.9255	
14*	1.2901	1.2548	1.2349	1.2511	2.1722	4.0165		
15 *	2.7661	2.6565	2.7446	2.9250				

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 309 of 312

TABLE A-5 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) POWER ESCALATION

AT 118% POWER, 4 EFPD, THIS IS LEVEL 4 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A

8*	1.6955	1.7289	1.5248	1.7451	1.3256	1.4733	1.2232	2.6603
9*	1.7289	1.3098	1.6737	1.2951	1.5816	1.3088	1.1920	2.5602
10*	1.5248	1.6790	1.4459	1.4687	1.2301	1.3414	1.1738	2.6410
11*	1.7451	1.2990	1.4746	1.2530	1.4032	1.2160	1.1919	2.8256
12*	1.3256	1.5834	1.2317	1.4036	1.4031	1.2342	2.0996	
13*	1.4733	1.3103	1.3441	1.2178	1.2354	2.1410	3.8056	
14*	1.2232	1.1937	1.1757	1.1940	2.1016	3.8993		
15 *	2.6603	2.5616	2.6454	2.8310				

AT 118% POWER, 4 EFPD, THIS IS LEVEL 3 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A

8*	1.6910	1.7041	1.4747	1.6740	1.3127	1.4511	1.2085	2.5585
9*	1.7041	1.2922	1.6447	1.2635	1.5494	1.2957	1.1809	2.4678
10*	1.4747	1.6487	1.4321	1.4278	1.2110	1.3248	1.1636	2.5629
11*	1.6740	1.2672	1.4334	1.2419	1.3800	1.2005	1.1743	2.7680
12*	1.3127	1.5512	1.2126	1.3804	1.3916	1.2181	2.0243	
13*	1.4511	1.2970	1.3274	1.2022	1.2194	2.1071	3.7312	
14*	1.2085	1.1823	1.1654	1.1763	2.0268	3.8251		
15 *	2.5585	2.4691	2.5671	2.7732				

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 310 of 312

TABLE A-5 (CONTINUED)

M-SUB-C VALUES (F-SUB-Q RPS MARGIN) POWER ESCALATION

AT 118% POWER, 4 EFPD, THIS IS LEVEL 2 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A

8*	1.9375	1.8483	1.3124	1.7770	1.2313	1.6295	1.1931	2.6719
9*	1.8483	1.3044	1.8215	1.2729	1.6918	1.4388	1.1714	2.5824
10*	1.3124	1.8241	1.6193	1.5361	1.2295	1.4918	1.1839	2.7636
11*	1.7770	1.2783	1.5419	1.2424	1.4982	1.1635	1.2464	3.0098
12*	1.2313	1.6946	1.2313	1.4995	1.6108	1.2404	2.1057	
13*	1.6295	1.4404	1.4947	1.1650	1.2418	2.2869	4.0665	
14*	1.1931	1.1728	1.1857	1.2485	2.1103	4.1642		
15 *	2.6719	2.5845	2.7682	3.0154				

AT 118% POWER, 4 EFPD, THIS IS LEVEL 1 OF 24
(LEVEL 24 = TOP OF CORE, LEVEL 1 = BOTTOM)

	H	G	F	E	D	C	B	A

8*	4.2549	3.9399	3.0245	3.7485	2.8987	3.6826	3.0591	5.8690
9*	3.9399	3.1192	3.8630	2.9226	3.5841	3.4670	3.0248	5.7406
10*	3.0245	3.8726	3.7677	3.4125	2.8306	3.4830	3.0669	6.0556
11*	3.7485	2.9312	3.4241	2.8557	3.4358	2.8388	3.2502	6.7734
12*	2.8987	3.5907	2.8352	3.4394	3.8448	3.1873	4.6560	
13*	3.6826	3.4705	3.4895	2.8425	3.1909	4.9532	8.9738	
14*	3.0591	3.0273	3.0716	3.2560	4.6669	9.0397		
15 *	5.8690	5.7434	6.0638	6.7858				

CNEI-0400-355
Appendix A, Rev. 0
Page 311 of 312

F-DEL-H & M-DEL-H VALUES - POWER ESCALATION

	H	G	F	E	D	C	B	A
8	* 1.1443	* 1.1331	* 1.1849	* 1.1299	* 1.3330	* 1.2848	* 1.3966	* 0.6739 *
	* 1.4851	* 1.5162	* 1.3726	* 1.4981	* 1.2370	* 1.3492	* 1.2465	* 2.3939 *
9	* 1.1331	* 1.3598	* 1.1666	* 1.3670	* 1.2296	* 1.4315	* 1.4291	* 0.7024 *
	* 1.5162	* 1.2943	* 1.4839	* 1.2090	* 1.3891	* 1.2174	* 1.2236	* 2.3129 *
10	* 1.1849	* 1.1640	* 1.3343	* 1.3184	* 1.4247	* 1.4011	* 1.4432	* 0.6701 *
	* 1.3726	* 1.4873	* 1.2958	* 1.3239	* 1.2554	* 1.2588	* 1.2440	* 2.4612 *
11	* 1.1299	* 1.3633	* 1.3139	* 1.4016	* 1.3597	* 1.4151	* 1.4211	* 0.6275 *
	* 1.4981	* 1.2113	* 1.3278	* 1.2703	* 1.3034	* 1.2676	* 1.2569	* 2.6597 *
12	* 1.3330	* 1.2284	* 1.4230	* 1.3593	* 1.3404	* 1.3891	* 0.8444	* 2.3939 *
	* 1.2370	* 1.3901	* 1.2002	* 1.3037	* 1.3062	* 1.2738	* 2.0019	* 2.4612 *
13	* 1.2848	* 1.4303	* 1.3992	* 1.4134	* 1.3880	* 0.9074	* 0.4754	* 2.3939 *
	* 1.3492	* 1.2181	* 1.2600	* 1.2689	* 1.2747	* 1.8499	* 3.4573	* 2.4612 *
14	* 1.3966	* 1.4278	* 1.4416	* 1.4193	* 0.8436	* 0.4622	* 2.3939 *	* 2.4612 *
	* 1.2465	* 1.2244	* 1.2451	* 1.2584	* 2.0031	* 3.5518	* 2.3939 *	* 2.4612 *
15	* 0.6739	* 0.7022	* 0.6693	* 0.6265	* F-DEL-H	* 2.3939 *	* 2.3129 *	* 2.4612 *
	* 2.3939	* 2.3132	* 2.4634	* 2.6625	* M-DEL-H	* 2.3939 *	* 2.3129 *	* 2.4612 *

	H	G	F	E	D	C	B	A
8	* 1.1250	* 1.1152	* 1.1677	* 1.1217	* 1.3376	* 1.2944	* 1.4078	* 0.6685
	* 1.8689	* 1.9095	* 1.6719	* 1.7437	* 1.4375	* 1.5499	* 1.4525	* 2.8438
9	* 1.1152	* 1.3471	* 1.1562	* 1.3682	* 1.2353	* 1.4488	* 1.4434	* 0.6973
	* 1.9095	* 1.6097	* 1.7835	* 1.4284	* 1.6373	* 1.3986	* 1.4345	* 2.7426
10	* 1.1677	* 1.1531	* 1.3379	* 1.3219	* 1.4376	* 1.4192	* 1.4594	* 0.6655
	* 1.6719	* 1.7939	* 1.5554	* 1.5837	* 1.4019	* 1.4671	* 1.4408	* 2.9461
11	* 1.1217	* 1.3643	* 1.3171	* 1.4142	* 1.3747	* 1.4297	* 1.4324	* 0.6224
	* 1.7437	* 1.4319	* 1.5883	* 1.4693	* 1.5747	* 1.5600	* 1.5263	* 3.1997
12	* 1.3376	* 1.2340	* 1.4357	* 1.3743	* 1.3541	* 1.3996	* 0.8420	*
	* 1.4375	* 1.6380	* 1.4031	* 1.5751	* 1.5745	* 1.5503	* 2.4980	*
13	* 1.2944	* 1.4475	* 1.4173	* 1.4278	* 1.3984	* 0.9051	* 0.4672	*
	* 1.5499	* 1.3992	* 1.4683	* 1.5617	* 1.5515	* 2.3038	* 4.3702	*
14	* 1.4078	* 1.4420	* 1.4576	* 1.4303	* 0.8412	* 0.4542	*	
	* 1.4525	* 1.4354	* 1.4421	* 1.5281	* 2.4997	* 4.4883	*	
15	* 0.6685	* 0.6971	* 0.6646	* 0.6214	* F-DEL-H			
	* 2.8438	* 2.7433	* 2.9488	* 3.2031	* M-DEL-H			

Catawba 2 Cycle 24 Core Operating Limits Report

CNEI-0400-355
Appendix A, Rev. 0
Page 312 of 312

TABLE A-6 (CONTINUED)

F-DEL-H & M-DEL-H VALUES - POWER ESCALATION

AT 50% POWER, 4 EFPD								
	H	G	F	E	D	C	B	A
8	* 1.1025	* 1.0941	* 1.1483	* 1.1121	* 1.3413	* 1.3034	* 1.4194	* 0.6641 *
	* 1.7447	* 1.9036	* 1.5999	* 1.6975	* 1.3843	* 1.4939	* 1.4103	* 2.7230 *
9	* 1.0941	* 1.3315	* 1.1432	* 1.3683	* 1.2401	* 1.4668	* 1.4604	* 0.6932 *
	* 1.9036	* 1.6017	* 1.7582	* 1.3833	* 1.5867	* 1.3430	* 1.3938	* 2.6341 *
10	* 1.1483	* 1.1399	* 1.3392	* 1.3240	* 1.4511	* 1.4383	* 1.4766	* 0.6620 *
	* 1.5999	* 1.7688	* 1.5148	* 1.5487	* 1.3543	* 1.4160	* 1.4061	* 2.8427 *
11	* 1.1121	* 1.3642	* 1.3190	* 1.4272	* 1.3899	* 1.4450	* 1.4456	* 0.6184 *
	* 1.6975	* 1.3863	* 1.5535	* 1.4203	* 1.5186	* 1.5202	* 1.5113	* 3.1347 *
12	* 1.3413	* 1.2387	* 1.4491	* 1.3894	* 1.3682	* 1.4113	* 0.8410 *	
	* 1.3843	* 1.5869	* 1.3556	* 1.5190	* 1.4947	* 1.5183	* 2.3858 *	
13	* 1.3034	* 1.4650	* 1.4361	* 1.4430	* 1.4101	* 0.9040	* 0.4599 *	
	* 1.4939	* 1.3437	* 1.4172	* 1.5216	* 1.5194	* 2.2455	* 4.2989 *	
14	* 1.4194	* 1.4586	* 1.4747	* 1.4434	* 0.8400	* 0.4470 *		
	* 1.4103	* 1.3947	* 1.4072	* 1.5130	* 2.3874	* 4.3217 *		
15	* 0.6641	* 0.6929	* 0.6610	* 0.6174	F-DEL-H			
	* 2.7230	* 2.6345	* 2.8453	* 3.1382	M-DEL-H			

AT 30% POWER, 4 EFPD								
	H	G	F	E	D	C	B	A
8	* 1.0810	* 1.0741	* 1.1302	* 1.1032	* 1.3442	* 1.3111	* 1.4298	* 0.6607 *
	* 1.7447	* 1.9036	* 1.5999	* 1.6975	* 1.3843	* 1.4939	* 1.4103	* 2.7230 *
9	* 1.0741	* 1.3162	* 1.1318	* 1.3682	* 1.2440	* 1.4830	* 1.4756	* 0.6900 *
	* 1.9036	* 1.6017	* 1.7582	* 1.3833	* 1.5867	* 1.3430	* 1.3938	* 2.6341 *
10	* 1.1302	* 1.1271	* 1.3391	* 1.3252	* 1.4635	* 1.4548	* 1.4921	* 0.6593 *
	* 1.5999	* 1.7688	* 1.5148	* 1.5487	* 1.3543	* 1.4160	* 1.4061	* 2.8427 *
11	* 1.1033	* 1.3639	* 1.3200	* 1.4389	* 1.4032	* 1.4590	* 1.4580	* 0.6154 *
	* 1.6975	* 1.3863	* 1.5535	* 1.4203	* 1.5186	* 1.5202	* 1.5113	* 3.1347 *
12	* 1.3442	* 1.2426	* 1.4613	* 1.4027	* 1.3807	* 1.4222	* 0.8408 *	
	* 1.3843	* 1.5869	* 1.3556	* 1.5190	* 1.4947	* 1.5183	* 2.3858 *	
13	* 1.3111	* 1.4810	* 1.4525	* 1.4568	* 1.4209	* 0.9035	* 0.4536 *	
	* 1.4939	* 1.3437	* 1.4172	* 1.5216	* 1.5194	* 2.2455	* 4.2989 *	
14	* 1.4298	* 1.4737	* 1.4900	* 1.4556	* 0.8398	* 0.4410 *		
	* 1.4103	* 1.3947	* 1.4072	* 1.5130	* 2.3874	* 4.3217 *		
15	* 0.6607	* 0.6897	* 0.6583	* 0.6143	F-DEL-H			
	* 2.7230	* 2.6345	* 2.8453	* 3.1382	M-DEL-H			