

DUKE POWER COMPANY

P.O. BOX 33189
CHARLOTTE, N.C. 28242

HAL B. TUCKER
VICE PRESIDENT
NUCLEAR PRODUCTION

TELEPHONE
(704) 373-4531

February 21, 1983

✓ Mr. Harold R. Denton, Director
Office of Nuclear Reactor Regulation
U. S. Nuclear Regulatory Commission
Washington, D. C. 20555


Attention: Ms. E. G. Adensam, Chief
Licensing Branch No. 4

Re: Catawba Nuclear Station
Docket Nos. 50-413, 50-414

Dear Sir:

Attached please find a system description for the proposed upgrade to the meteorological system at Catawba including the Class A model. This upgrade will be completed by fuel load.

Very truly yours,



Hal B. Tucker

JSW:scs

Attachment

cc: Mr. James P. O'Reilly, Regional Administrator
U. S. Nuclear Regulatory Commission
Region II
101 Marietta Street, Suite 3100
Atlanta, Georgia 30303

Mr. P. K. Van Doorn
NRC Resident Inspector
Catawba Nuclear Station

Robert Guild, Esq.
Attorney-at-Law
P. O. Box 12097
Charleston, South Carolina 29412

Palmetto Alliance
2135½ Devine Street
Columbia, South Carolina 29205

Mr. Jesse L. Riley
Carolina Environmental Study Group
854 Henley Place
Charlotte, North Carolina 28207

Mr. Henry A. Presler, Chairman
Charlotte-Mecklenburg Env.
Coalition
943 Henley Place
Charlotte, North Carolina 28207

3001

CATAWBA METEOROLOGICAL SYSTEM

INTRODUCTION

In response to guidance provided by NUREG-0654, Revision 1 and supporting documents, Regulatory Guide 1.23, Proposed Revision 1, Regulatory Guide 1.111, Revision 1, and Regulatory Guide 1.109, Duke has reviewed the existing meteorological system at Catawba Nuclear Station and, based on that review, has developed a plan for upgrading the meteorology system. This functional description of the upgraded meteorological system is intended to provide compliance with NUREG-0654, Appendix 2.

The present meteorological measurement program at Catawba Nuclear Station was originally designed to best describe the meteorological conditions on-site by taking into account source characteristics, terrain features and modeling needs. Due to revisions to guidelines, Duke has developed changes to upgrade assessment capabilities and reliability of the meteorological programs at Catawba Nuclear Station.

Basically, these changes will:

- 1) Establish a capability to assess near real time 15 minutes averaged/validated data with a 12-hour recall and associated dose estimates within 15 minutes of request that account for variability in travel path of effluent material.
- 2) Improve reliability and accuracies through upgraded instrumentation and upgrading of meteorological data, other dose related measurements, and dose estimates as needed.

EFFLUENT DISPERSION MODEL

The Class A Model which will be used in the transport and diffusion of released effluents is a puff-advection model which incorporates a horizontal wind field that can vary in time and space. It is assumed in the puff-type model that the spread within a puff along the direction of flow is equal to the spread in the lateral direction (i.e., horizontal Gaussian Symmetry). In the model, concentration averages are provided by total integrated concentrations which are calculated by summing concentrations of individual elements for the grid points over which the puffs pass. Features to be incorporated into the model include the use of predicted and edited primary or backup data, where appropriate, terrain effects, building wake effects, ground or elevated release mode, and special features used to describe site-specific meteorology. Appropriate persistence and worst case meteorology will be used for initial releases until a meteorologist is notified to provide predictive data.

INSTRUMENTATION

Table 1 shows the type and number of parameters to be measured at Catawba Nuclear Station after upgrading of the system. The meteorological conditions present at Catawba Nuclear Station warrant the use of the basic described meteorological variables. These include wind speed and wind direction measured at high and low levels, delta temperature for stability classification, ambient air, and dew point temperature, and precipitation.

DATA HANDLING

The dose calculation system consists of a primary digital recording/storage system and a secondary analog chart recording system. The meteorological variables will be sampled at 60 second intervals for the digital system except for variables used to calculate sigma theta, these will be sampled every 5 seconds.

Prior to meteorological data use or storage, the data will go through a series of edit checks which include range comparisons and data inter-comparisons to determine validity of data and whether backup data should be used.

Upon validation, the data will be placed on 12-hour recall for emergency effluent dispersion modeling and dose calculation. Validated data will also be stored on a magnetic medium as one-hour average for future use and to meet the 90% joint annual data recovery requirements.

DOSE ASSESSMENT METHODOLOGY

The dose assessment methodology for Catawba consists of two separate calculations. The first calculation is based on the amount of radioactivity that has been or is actually being released through the unit vent; the second calculation is based on a potential release using actual source term and design basis assumptions for containment leakage.

To determine the dose from an actual release through the unit vent, both the concentration of isotopes in the unit vent and the unit vent flow rate must be known. Unit vent grab sample analyses are used to determine the isotopic concentrations of the release. When this information is not available, unit vent radiation monitors and their energy dependent sensitivities are used. The flow rate is obtained from the unit vent flow rate monitor. The combination of flow rate and isotopic concentrations is used to determine the actual release rate through the unit vent.

If substantial radioactivity is present in the containment, another calculation is performed. The calculation provides the dose potential for a release based on the radioactivity present in the containment. A containment atmosphere sample is used to determine the isotopic concentrations. If this information is unavailable, the containment building area radiation monitor is used to determine the severity of the accident by comparison with design basis source terms.

The containment design leak rate is used unless factors, such as containment pressure, indicate that another value is more realistic. The isotopic concentrations combined with a containment leak rate provide a potential release rate of activity.

The dose model calculates both cumulative and projected doses. Downwind concentrations are determined by applying the relative atmospheric dispersion factors calculated by the meteorological model. Projected concentrations are determined in one-hour increments up to a period of four hours. A forty-year thyroid dose commitment and a whole body dose from exposure to a semi-infinite cloud are determined. The dose conversion factors are derived from Regulatory Guide 1.109.

This dose assessment methodology provides the capability to calculate the dose from actual or potential releases following an accident. Near real time radiation monitor readings and meteorological data are combined automatically to provide timely, realistic dose calculations. However, the flexibility to manually

input sample data is also provided. This model meets the guidance to NUREG-0654, Revision 1, Appendix 2 to provide the capability "to assess and monitor actual or potential off-site consequences of a radiological emergency condition."

UPGRADED PHYSICAL SYSTEM DESCRIPTION

The conceptual layout for the meteorological system is presented in Figure 1. The sensors for the meteorological system are mounted on existing towers. The signals will enter each Unit Operator Aid Computer (OAC) and the analog system. The meteorological data will be stored on the OAC and can be transferred routinely or during an emergency situation to the Distributed Data Processor (DDP) via a manual transfer of a diskette from a OAC disk drive to a remote disk drive. The Class A Model calculations will be made on the DDP system. Routine meteorological data will be stored through the Distributed Data Processor System. In the event of an emergency, it will have the capability to recall 12-hour meteorological data, radiation monitor data, perform Class A Model calculations, and provide the inputs and calculated outputs to all appropriate site emergency response areas.

DETAILED DESCRIPTION OF SUBSYSTEMS

Sensors to Operator Aid Computer

The parameters to be measured by the meteorological system are listed in Table 1. These meteorological sensors will meet the accuracies suggested in Regulatory Guide 1.23, Proposed Revision 1. Signals from the meteorological system to the OAC (digital system) and analog charts will be cabled to the plant. Housing for signal conditioners and related instrumentation will be housed near the high level tower. Uninterruptible power supplies will be provided to assure continuous operation of the meteorological system. Sensors, conditioning equipment and instrumentation will have lightning protection and will be heated where necessary to minimize effects of adverse environmental conditions. Signal cables will be shielded to minimize electrical interference.

Operator Aid Computer (OAC) to Distributed Data Processor (DDP)

The process computer OAC system which is utilized for data collection consists of GE/Honeywell 4000 series equipment. Inputs from the sensors (Figure 1) will be wired to the OAC and will be scanned according to guidance provided by Regulatory Guide 1.23, Proposed Revision 1. Predefined meteorological inputs will be averaged for 15 minutes and the average will be stored for later use. The OAC has bulk storage capability for 48 hours worth of 15 minute averages.

Data retrieval from the OAC will be initiated at the Performance Typewriter in the computer room. Each unit OAC is a backup for the other, capable of supplying the same required meteorological readings. The data will either be printed in a tabular format or stored on a floppy disk (diskette) which is designed for data exchange applications. Upon output completion, the data will be removed from the OAC and additional data can be taken.

By means of a separate floppy disk reader attached to a data communications terminal in proximity to the OAC, the data will be transmitted to an off-line computer facility either on-site, or remote to the station. Each set of data readings will be stored in an on-line data base for recall on demand.

The data will be subjected to validation procedures through both software and manual methods. Immediately upon completion of the validation procedures, the data will be available to designated agencies through dial-in terminal facilities. The data will further be available for both periodic archiving and for immediate processing by the puff-advection model. Output from this model may also be made available to designated agencies in a read only mode.

The primary off-line data processing facility will be the station distributed data processor (DDP). First line backup to the station facility (See Figure 2) will be a similar DDP facility in the General Office in Charlotte, North Carolina. Additional backup facilities are available at each of the other nuclear stations. The capability will also be provided to process this data in the Charlotte Corporate Computer Center.

QUALITY ASSURANCE

In response to point 7, Quality Assurance of Regulatory Guide 1.23, Proposed Revision 1, new equipment will be purchased from suppliers who have provided high quality, reliable equipment in the past. Documentation concerning fabrication and assembly of the components will be considered on a case-by-case basis as is normal for non-10CFR 50, Appendix B items.

Tower modifications, cabling and computer hardware will be designed, procured and installed as a non-safety-related system. Surveillance during construction will be provided the same as for any other non-safety system.

Maintenance, calibration and repair procedures, and logs will be available at the site for inspection. The procedures and logs will be designated as site controlled documents. Inventories of meteorological system spare parts, sensors and components will be incorporated into existing company procedures.


TABLE 1

Catawba Nuclear Station
Meteorological Parameters of the Upgraded System


Primary System	Existing high level and 10 meter towers	High level wind speed and direction Low level wind speed and direction Delta temperature (stability) Dry bulb temperature Precipitation Dew point
----------------	--	--

Figure 1.

Catawba Nuclear Station
Generalized Meteorological System Upgrade

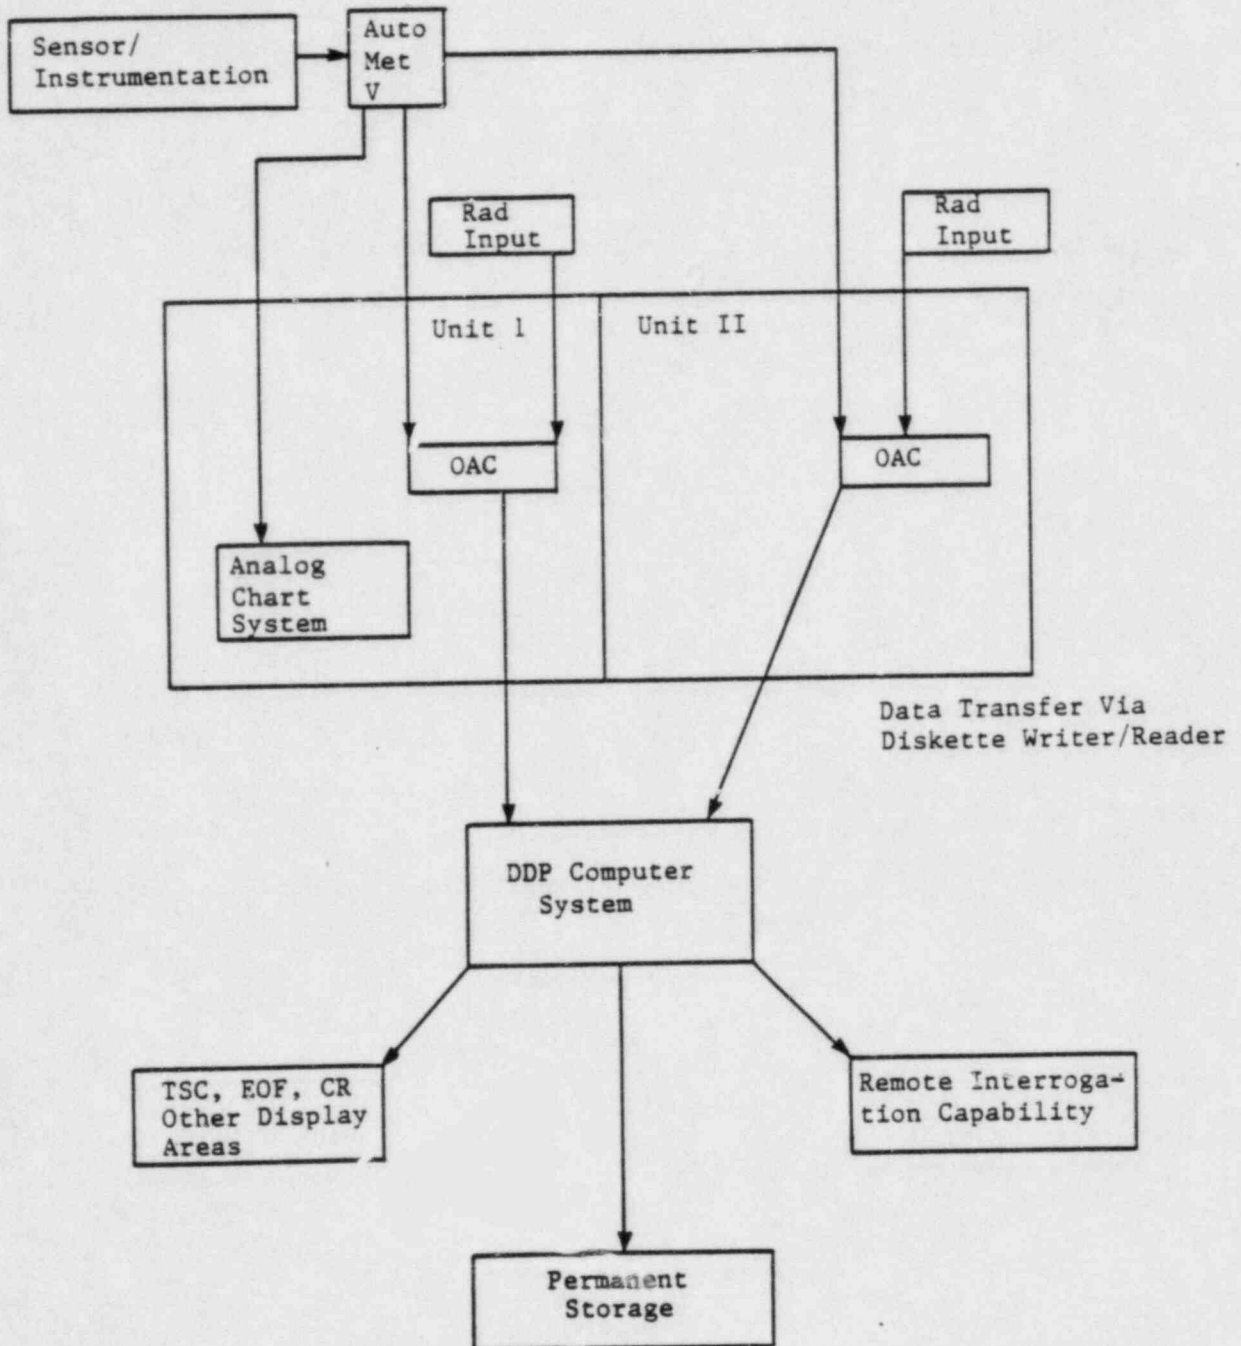

NUCLEAR STATION OFFLINE COMPUTER SUPPORT

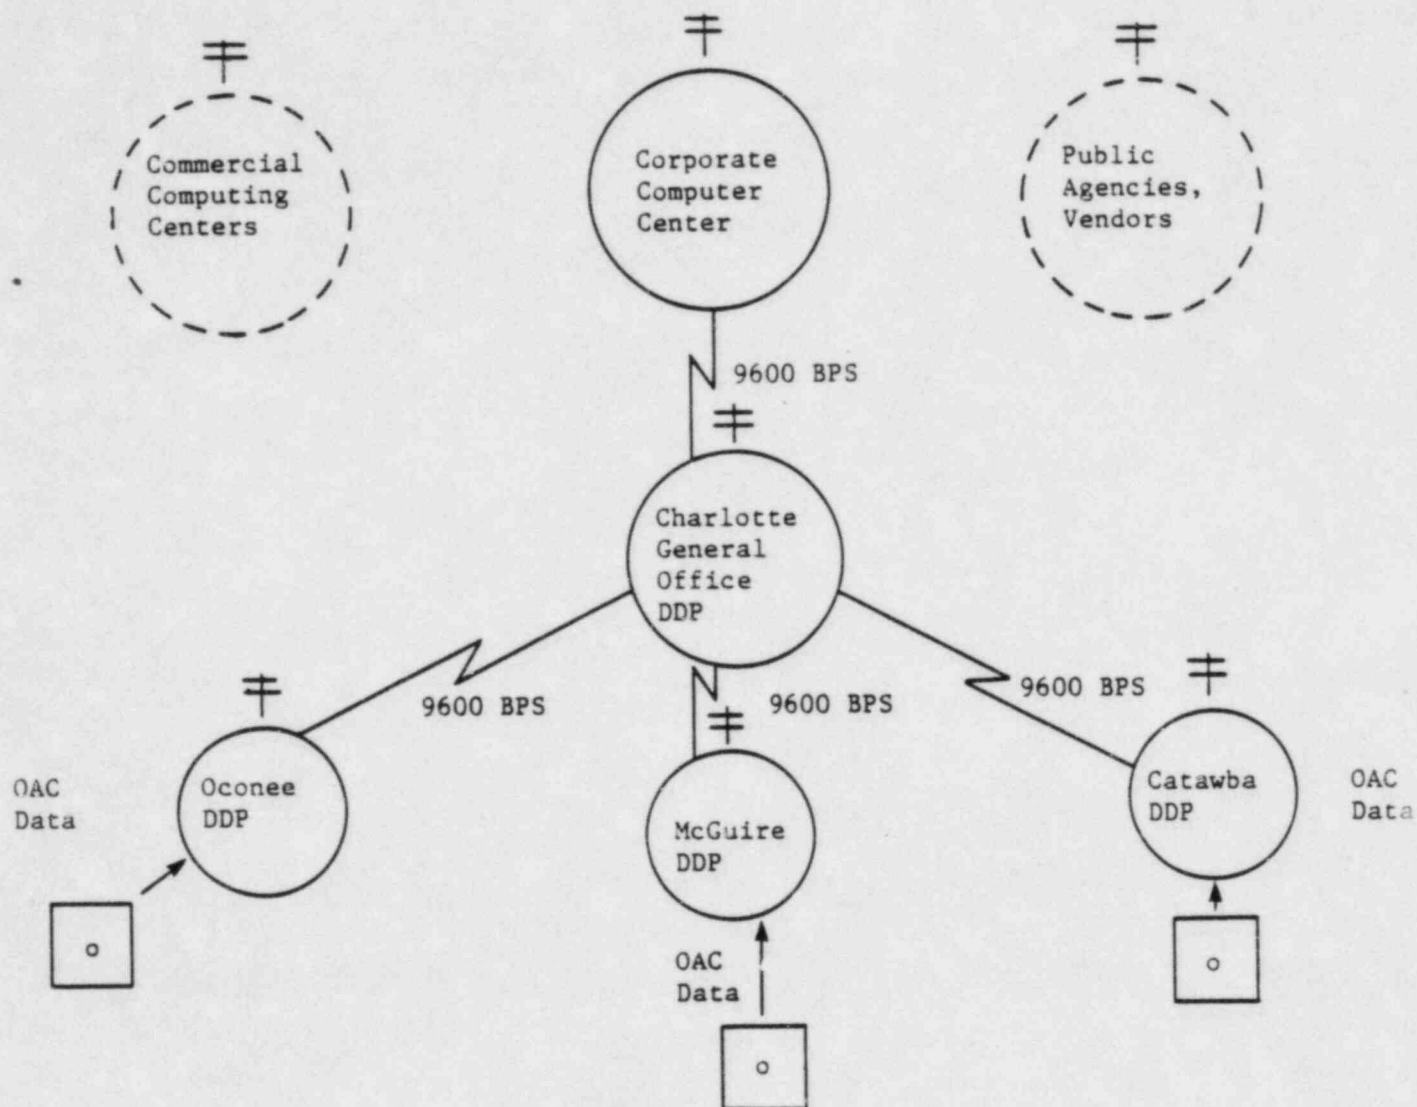

Notes

- 1) Σ denotes dedicated communications
- 2) \neq denotes 4800 BPS dial-up communications capability
- 3) Dedicated 9600 BPS communications to Corporate Computer Center from each station DDP schedule for 1982.
- 4) 9600 BPS network of DDP's scheduled for cross-connection (i.e., as opposed to current "star" network) in 1983.