


# RESAR-SP/90 REACTOR SYSTEM

---

WESTINGHOUSE  
ADVANCED PRESSURIZED  
WATER REACTOR

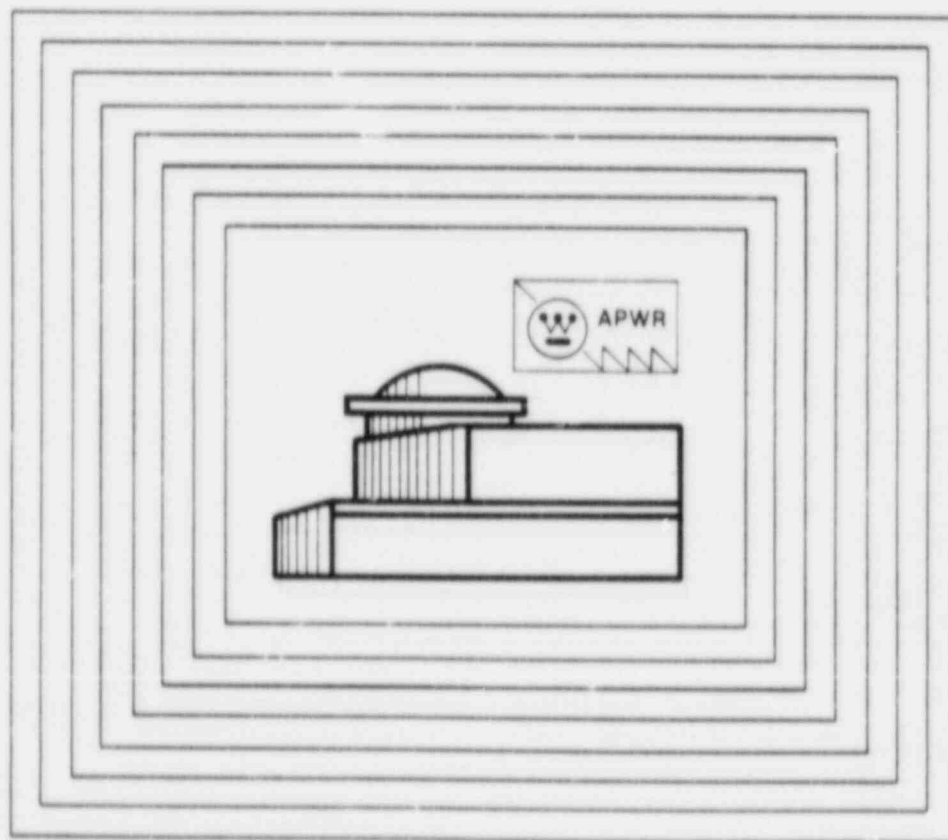

STANDARD PLANT DESIGN



# TABLE OF CONTENTS

<u>Section</u>	<u>Title</u>	<u>Page</u>	Reference SAR Section <u>Status</u>
1.0	INTRODUCTION AND GENERAL DESCRIPTION OF PLANT	1.1-1	II
1.1	INTRODUCTION	1.1-1	II
1.2	GENERAL PLANT DESCRIPTION	1.2-1	II
1.2.2	Principal Design Criteria	1.2-1	II
1.2.3	Plant Description	1.2-1	II
1.2.3.1	Reactor System	1.2-1	II
1.3	COMPARISON TABLES	1.3-1	II
1.3.1	Comparison With Similar Facility Designs	1.3-1	II
1.5	REQUIREMENTS FOR FURTHER TECHNICAL INFORMATION	1.5-1	II
1.5.1	Fuel System Tests	1.5-1	I
1.5.1.1	Fuel Assembly Tests	1.5-1	I
1.5.1.1.1	Fuel Assembly Structural Tests	1.5-1	I
1.5.1.1.2	Fuel Assembly Hydraulic Flow Tests	1.5-2	I
1.5.1.2	Core Components Tests	1.5-3	I
1.5.1.2.1	Rod Cluster Control and Gray Rod Assembly Tests	1.5-3	I
1.5.1.2.2	Water Displacer Rod Assembly Tests	1.5-3	I
1.5.1.3	Drive Mechanism Tests	1.5-4	I
1.5.1.3.1	Control Rod Drive Mechanism Tests	1.5-4	I
1.5.1.3.2	Water Displacer Rod Drive Mechanism Tests	1.5-5	I
1.5.2	Reactor Internals Design Verification Tests	1.5-6	I
1.6	MATERIAL INCORPORATED BY REFERENCE	1.6-1	II
1.8	CONFORMANCE WITH THE STANDARD REVIEW PLAN	1.8-1	II

# TABLE OF CONTENTS (cont)

<u>Section</u>	<u>Title</u>	<u>Page</u>	<u>Reference SAR Section Status</u>
2.0	SITE CHARACTERISTICS	2.0-1	NA
3.0	DESIGN OF STRUCTURES, COMPONENTS, EQUIPMENT AND SYSTEMS	3.1-1	II
3.1	CONFORMANCE WITH NRC GENERAL DESIGN CRITERIA	3.1-1	II
3.2	CLASSIFICATION OF STRUCTURES, COMPONENTS, SYSTEMS	3.2-1	II
3.2.1	Seismic Classification	3.2-2	II
3.2.2	System Quality Group Classification	3.2-2	II
3.2.3	Safety Classes	3.2-2	II
3.2.4	References	3.2-2	II
3.9	MECHANICAL SYSTEMS AND COMPONENTS	3.9-1	II
3.9.2	Dynamic Testing and Analysis	3.9-1	II
3.9.2.3	Dynamic Response Analysis of Reactor Internals Under Operational Flow Transients and Steady-State Conditions	3.9-1	I
3.9.2.4	Preoperational Flow-Induced Vibration Testing of Reactor Internals	3.9-1	I
3.9.2.5	Dynamic System Analysis of the Reactor Internals Under Faulted Conditions	3.9-2	I
3.9.2.6	Correlations of Reactor Internals Vibration Tests With Analytical Results	3.9-3	I
3.9.4	Rod Drive Systems	3.9-3	I
3.9.4.1	Descriptive Information of the Control and Gray Rod Drive Systems	3.9-3	I
3.9.4.1.1	Control Rod Drive Mechanism (CROM) and Gray Rod Drive Mechanism (GROM)	3.9-3	I
3.9.4.1.1.1	RCCA and GRA Withdrawal	3.9-7	I
3.9.4.1.1.2	RCCA and GRA Insertion	3.9-9	I

# TABLE OF CONTENTS (cont)

<u>Section</u>	<u>Title</u>	<u>Page</u>	Reference SAR Section <u>Status</u>
3.9.4.1.1.3	Holding and Tripping of the RCCAs and GRAs	3.9-10	I
3.9.4.1.2	Applicable Control Rod and Gray Rod Drive System Design Specifications (CRDS/GRDS)	3.9-11	I
3.9.4.1.2.1	Design Bases	3.9-11	I
3.9.4.1.2.2	Design Stresses	3.9-11	I
3.9.4.1.2.2.1	Allowable Stresses	3.9-12	I
3.9.4.1.2.2.2	Dynamic Analysis	3.9-12	I
3.9.4.1.2.3	Control Rod Drive Mechanisms (CRDMs)/Gray Rod Drive Mechanisms (GRDMs)	3.9-12	I
3.9.4.1.2.4	CRDM/GRDM Operational Requirements	3.9-12	I
3.9.4.1.3	CRDM/GRDM Design Loads, Stress Limits, and Allowable Deformations	3.9-13	I
3.9.4.1.3.1	Pressure Retaining Components	3.9-13	I
3.9.4.1.3.2	Drive Rod Assembly and Hub Extension Assembly	3.9-14	I
3.9.4.1.3.3	Latch Assembly and Coil Stack Assembly	3.9-15	I
3.9.4.1.3.3.1	Results of Dimensional and Tolerance Analysis	3.9-15	I
3.9.4.1.4	CRDM/GRDM Performance Assurance Program	3.9-16	I
3.9.4.2	Displacer Rod Drive System	3.9-18	I
3.9.4.2.1	Descriptive Information of the Displacer Rod Drive System	3.9-18	I
3.9.4.2.2	Displacer Rod Drive Mechanism (DROM)	3.9-18	I
3.9.4.2.3	Displacer Rod Drive Operation	3.9-21	I
3.9.4.2.3.1	Design Bases	3.9-22	I
3.9.4.2.3.2	Design Stresses	3.9-22	I

# TABLE OF CONTENTS (cont)

<u>Section</u>	<u>Title</u>	<u>Page</u>	Reference SAR Section <u>Status</u>
3.9.4.2.3.3	Allowable Stresses	3.9-23	I
3.9.4.2.3.4	Dynamic Stresses	3.9-23	I
3.9.4.2.4	Displacer Rod Drive Operational Requirements	3.9-23	I
3.9.5	Reactor Internals	3.9-23	I
3.9.5.1	Description	3.9-23	I
3.9.5.1.1	Calandria	3.9-24	I
3.9.5.1.2	Upper Internals Assembly	3.9-25	I
3.9.5.1.2.1	Water Displacer Rod Guide Structure	3.9-26	I
3.9.5.1.2.2	RCCA Guide Structure	3.9-26	I
3.9.5.1.3	Lower Internals	3.9-26	I
3.9.5.1.3.1	Core Barrel Assembly	3.9-27	I
3.9.5.1.3.2	Radial Core Support Keys	3.9-27	I
3.9.5.1.3.3	Secondary Core Support	3.9-27	I
3.9.5.1.3.4	Bottom Mounted Instrumentation	3.9-28	I
3.9.5.1.3.5	Head and Vessel Alignment Pins	3.9-28	I
3.9.5.1.3.6	Hold Down Spring	3.9-29	I
3.9.5.1.3.7	Upper Core Plate Guide Pins	3.9-29	I
3.9.5.1.3.8	Irradiation Specimen Guides	3.9-30	I
3.9.5.1.3.9	Safety Injection Nozzle Deflectors	3.9-30	I
3.9.5.1.3.10	Radial Reflector	3.9-30	I
3.9.5.2	Design Loading Conditions	3.9-31	I
3.9.5.2.1	Normal Conditions Transients (Operating Condition I)	3.9-31	I
3.9.5.2.2	Upset Conditions Transients (Operating Condition II)	3.9-31	I
3.9.5.2.3	Emergency Conditions Transients (Operating Condition III)	3.9-32	I

# TABLE OF CONTENTS (cont)

<u>Section</u>	<u>Title</u>	<u>Page</u>	Reference SAR Section <u>Status</u>
3.9.5.2.4	Faulted Conditions Transients (Operating Condition IV)	3.9-32	I
3.9.5.3	Design Bases	3.9-32	I
3.9.5.3.1	Allowable Stresses	3.9-33	I
3.9.6	References	3.9-34	II
4.0	REACTOR	4.1-1	I
4.1	SUMMARY DESCRIPTION	4.1-1	I
4.2	FUEL SYSTEM DESIGN	4.2-1	I
4.2.1	Design Bases	4.2-2	I
4.2.1.1	Cladding (Zircaloy-4)	4.2-3	I
4.2.1.2	Fuel Material	4.2-4	I
4.2.1.3	Fuel Rod Performance	4.2-5	I
4.2.1.4	Spacer Grids	4.2-6	I
4.2.1.5	Fuel Assembly	4.2-6	I
4.2.1.6	Core Components	4.2-9	I
4.2.1.7	Testing, Irradiation Demonstration and Surveillance	4.2-11	I
4.2.2	Design Description	4.2-12	I
4.2.2.1	Fuel Rods	4.2-14	I
4.2.2.2	Fuel Assembly Structure	4.2-14	I
4.2.2.2.1	Bottom Nozzle	4.2-14	I
4.2.2.2.2	Top Nozzle	4.2-15	I
4.2.2.2.3	Guide and Instrumentation Thimbles	4.2-16	I
4.2.2.2.4	Grid Assemblies	4.2-18	I
4.2.2.3	Core Components	4.2-19	I
4.2.2.3.1	Rod Cluster Control Assemblies	4.2-19	I
4.2.2.3.2	Gray Rods	4.2-20	I

# TABLE OF CONTENTS (cont)

<u>Section</u>	<u>Title</u>	<u>Page</u>	Reference SAR Section <u>Status</u>
4.2.2.3.3	Neutron Source Assembly	4.2-21	I
4.2.2.3.4	Water Displacer Rods	4.2-21	I
4.2.3	Design Evaluation	4.2-22	I
4.2.3.1	Cladding	4.2-23	I
4.2.3.2	Fuel Material Consideration	4.2-28	I
4.2.3.3	Fuel Rod Performance	4.2-29	I
4.2.3.4	Spacer Grids	4.2-38	I
4.2.3.5	Fuel Assembly	4.2-38	I
4.2.3.6	Reactivity Control Assemblies and Source Rods	4.2-39	I
4.2.4	Testing and Inspection Plan	4.2-41	I
4.2.4.1	Quality Assurance Program	4.2-41	I
4.2.4.2	Quality Control	4.2-42	I
4.2.4.3	Core Component Testing and Inspection	4.2-46	I
4.2.4.4	Tests and Inspections by Others	4.2-48	I
4.2.4.5	Onsite Inspection	4.2-48	I
4.2.5	References	4.2-48	I
4.3	NUCLEAR DESIGN	4.3-1	I
4.3.1	Design Basis	4.3-1	I
4.3.1.1	Fuel Burnup	4.3-2	I
4.3.1.2	Negative Reactivity Feedbacks (Reactivity Coefficient)	4.3-3	I
4.3.1.3	Control of Power Distribution	4.3-4	I
4.3.1.4	Maximum Controlled Reactivity Insertion Rate	4.3-5	I
4.3.1.5	Shutdown Margins	4.3-6	I
4.3.1.6	Stability	4.3-8	I
4.3.1.7	Anticipated Transients Without Trip	4.3-9	I
4.3.2	Description	4.3-9	I



# TABLE OF CONTENTS (cont)

<u>Section</u>	<u>Title</u>	<u>Page</u>	<u>Reference SAR Section Status</u>
4.3.2.1	Nuclear Design Description	4.3-9	I
4.3.2.2	Power Distributions	4.3-13	I
4.3.2.2.1	Definitions	4.3-13	I
4.3.2.2.2	Radial Power Distributions	4.3-16	I
4.3.2.2.3	Assembly Power Distributions	4.3-17	I
4.3.2.2.4	Axial Power Distributions	4.3-17	I
4.3.2.2.5	Local Power Peaking	4.3-19	I
4.3.2.2.6	Limiting Power Distributions	4.3-20	I
4.3.2.2.7	Experimental Verification of Power Distribution Analysis	4.3-29	I
4.3.2.2.8	Testing	4.3-33	I
4.3.2.2.9	Monitoring Instrumentation	4.3-33	I
4.3.2.3	Reactivity Coefficients	4.3-33	I
4.3.2.3.1	Fuel Temperature (Doppler) Coefficient	4.3-35	I
4.3.2.3.2	Moderator Coefficients	4.3-36	I
4.3.2.3.3	Power Coefficient	4.3-38	I
4.3.2.3.4	Comparison of Calculated and Experimental Reactivity Coefficients	4.3-39	I
4.3.2.3.5	Reactivity Coefficients Used In Transient Analysis	4.3-39	I
4.3.2.4	Control Requirements	4.3-40	I
4.3.2.4.1	Doppler	4.3-41	I
4.3.2.4.2	Variable Average Moderator Temperature	4.3-41	I
4.3.2.4.3	Redistribution	4.3-41	I
4.3.2.4.4	Void Content	4.3-42	I
4.3.2.4.5	Rod Insertion Allowance	4.3-42	I
4.3.2.4.6	Burnup	4.3-42	I
4.3.2.4.7	Xenon and Samarium Poisoning	4.3-42	I
4.3.2.4.8	pH Effects	4.3-43	I
4.3.2.4.9	Experimental Confirmation	4.3-43	I

# TABLE OF CONTENTS (cont)

<u>Section</u>	<u>Title</u>	<u>Page</u>	Reference SAR Section <u>Status</u>
4.3.2.4.10	Control	4.3-43	I
4.3.2.4.11	Chemical Poison	4.3-43	I
4.3.2.4.12	Rod Cluster Control Assemblies	4.3-44	I
4.3.2.4.13	Water Displacer Rod Assemblies	4.3-45	I
4.3.2.4.14	Gray Rod Assemblies and Load Following	4.3-46	I
4.3.2.4.15	Reactor Coolant Temperature	4.3-47	I
4.3.2.4.16	Integral Fuel Burnable Absorbers (IFBA)	4.3-48	I
4.3.2.4.17	Peak Xenon Startup	4.3-48	I
4.3.2.4.18	Load Follow Control and Xenon Control	4.3-48	I
4.3.2.4.19	Burnup	4.3-49	I
4.3.2.5	Control Rod, Gray Rod, Water Displacer Rod Patterns and Reactivity Worths	4.3-49	I
4.3.2.6	Criticality of the Reactor During Refueling and Criticality of Fuel Assemblies	4.3-52	I
4.3.2.7	Stability	4.3-55	I
4.3.2.7.1	Introduction	4.3-55	I
4.3.2.7.2	Stability Index	4.3-56	I
4.3.2.7.3	Prediction of the Core Stability	4.3-56	I
4.3.2.7.4	Stability Measurements	4.3-57	I
4.3.2.7.5	Comparison of Calculations with Measurements	4.3-59	I
4.3.2.7.6	Stability Control and Protection	4.3-60	I
4.3.2.8	Vessel Irradiation	4.3-61	I
4.3.3	Analytical Methods	4.3-62	I
4.3.3.1	Fuel Temperature (Doppler) Calculations	4.3-63	I
4.3.3.2	Macroscopic Group Constants	4.3-64	I
4.3.3.3	Spatial Few-Group Diffusion Calculations	4.3-66	I

# TABLE OF CONTENTS (cont)

<u>Section</u>	<u>Title</u>	<u>Page</u>	<u>Reference SAR Section Status</u>
4.3.4	Changes	4.3-67	I
4.3.5	References	4.3-68	I
4.4	THERMAL AND HYDRAULIC DESIGN	4.4-1	II
4.4.1	Design Basis	4.4-1	I
4.4.1.1	Departure from Nucleate Boiling Design Basis	4.4-2	I
4.4.1.2	Fuel Temperature Design Basis	4.4-4	I
4.4.1.3	Core Flow Design Basis	4.4-4	I
4.4.1.4	Hydrodynamic Stability Design Basis	4.4-5	I
4.4.1.5	Other Considerations	4.4-5	I
4.4.2	Description	4.4-6	I
4.4.2.1	Summary Comparison	4.4-6	I
4.4.2.2	Critical Heat Flux Ratio or Departure from Nucleate Boiling Ratio and Mixing Technology	4.4-7	I
4.4.2.2.1	Departure from Nucleate Boiling Technology	4.4-7	I
4.4.2.2.2	Definition of Departure from Nucleate Boiling Ratio	4.4-8	I
4.4.2.2.3	Mixing Technology	4.4-9	I
4.4.2.2.4	Hot Channel Factors	4.4-11	I
4.4.2.2.5	Effects of Rod Bow on DNBR	4.4-13	I
4.4.2.3	Linear Heat Generation Rate (LHGR)	4.4-14	I
4.4.2.4	Void Fraction Distribution	4.4-14	I
4.4.2.5	Core Coolant Flow Distribution	4.4-14	I
4.4.2.6	Core Pressure Drops and Hydraulic Loads	4.4-14	I
4.4.2.6.1	Core Pressure Drops	4.4-14	I
4.4.2.6.2	Hydraulic Loads	4.4-15	I

# TABLE OF CONTENTS (cont)

<u>Section</u>	<u>Title</u>	<u>Page</u>	Reference SAR Section <u>Status</u>
4.4.2.7	Correlation and Physical Data	4.4-16	I
4.4.2.7.1	Surface Heat Transfer Coefficients	4.4-16	I
4.4.2.7.2	Total Core and Vessel Pressure Drop	4.4-17	I
4.4.2.7.3	Void Fraction Correlation	4.4-19	I
4.4.2.8	Thermal Effects of Operational Transients	4.4-20	I
4.4.2.9	Uncertainties in Estimates	4.4-20	I
4.4.2.9.1	Uncertainties in Fuel and Cladding Temperatures	4.4-20	I
4.4.2.9.2	Uncertainties in Pressure Drops	4.4-21	I
4.4.2.9.3	Uncertainties Due to Inlet Flow Maldistribution	4.4-21	I
4.4.2.9.4	Uncertainty in DNB Correlation	4.4-22	I
4.4.2.9.5	Uncertainties in DNBR Calculations	4.4-22	I
4.4.2.9.6	Uncertainties in Flow Rates	4.4-23	I
4.4.2.9.7	Uncertainties in Hydraulic Loads	4.4-23	I
4.4.2.9.8	Uncertainty in Mixing Coefficient	4.4-23	I
4.4.2.10	Flux Tilt Consideration	4.4-24	I
4.4.2.11	Fuel and Cladding Temperatures	4.4-25	I
4.4.2.11.1	UO <sub>2</sub> Thermal Conductivity	4.4-26	I
4.4.2.11.2	Radial Power Distribution in UO <sub>2</sub> Fuel Rods	4.4-27	I
4.4.2.11.3	Gap Conductance	4.4-27	I
4.4.2.11.4	Surface Heat Transfer Coefficients	4.4-29	I
4.4.2.11.5	Fuel Clad Temperatures	4.4-29	I
4.4.2.11.6	Treatment of Peaking Factors	4.4-29	I
4.4.3	Description of the Thermal and Hydraulic Design of the Reactor Coolant System	4.4-30	I
4.4.3.1	Plant Configuration Data	4.4-30	I

# TABLE OF CONTENTS (cont)

<u>Section</u>	<u>Title</u>	<u>Page</u>	Reference SAR Section <u>Status</u>
4.4.3.2	Operating Restrictions on Pumps	4.4-31	I
4.4.3.3	Power-Flow Operating Map (BWR)	4.4-31	I
4.4.3.4	Temperature - Power Operating Map	4.4-31	I
4.4.3.5	Load Following Characteristics	4.4-32	I
4.4.3.6	Thermal and Hydraulic Characteristics	4.4-32	I
	Summary Table		
4.4.4	Evaluation	4.4-32	I
4.4.4.1	Critical Heat Flux	4.4-32	I
4.4.4.2	Core Hydraulics	4.4-32	I
4.4.4.2.1	Flow Paths Considered in Core Pressure Drop and Thermal Design	4.4-32	I
4.4.4.2.2	Inlet Flow Distributions	4.4-33	I
4.4.4.2.3	Empirical Friction Factor Correlations	4.4-34	I
4.4.4.3	Influence of Power Distribution	4.4-35	I
4.4.4.3.1	Nuclear Enthalpy Rise Hot Channel Factor, $F_{\Delta H}^N$	4.4-35	I
4.4.4.3.2	Axial Heat Flux Distributions	4.4-37	I
4.4.4.4	Core Thermal Response	4.4-38	I
4.4.4.5	Analytical Techniques	4.4-39	I
4.4.4.5.1	Core Analysis	4.4-39	I
4.4.4.5.2	Steady-State Analysis	4.4-39	I
4.4.4.5.3	Experimental Verification	4.4-40	I
4.4.4.5.4	Transient Analysis	4.4-40	I
4.4.4.6	Hydrodynamic and Flow Power Coupled Instability	4.4-41	I
4.4.4.7	Fuel Rod Behavior Effects from Coolant Flow Blockage	4.4-44	I
4.4.5	Testing and Verification	4.4-46	I

# TABLE OF CONTENTS (cont)

<u>Section</u>	<u>Title</u>	<u>Page</u>	<u>Reference</u> <u>SAR Section</u> <u>Status</u>
4.4.5.1	Tests Prior to Initial Criticality	4.4-46	I
4.4.5.2	Initial Power and Plant Operation	4.4-46	I
4.4.5.3	Component and Fuel Inspections	4.4-46	I
4.4.6	Instrumentation Requirements	4.4-46	I
4.4.6.1	Incore Instrumentation	4.4-47	I
4.4.6.2	Overtemperature and Overpower $\Delta T$ Instrumentation	4.4-47	I
4.4.6.3	Instrumentation to Limit Maximum Power Output	4.4-48	I
4.4.7	References	4.4-49	I
4.5	REACTOR MATERIALS	4.5-1	I
4.5.1	Control Rod Drive System Structural Materials	4.5-1	I
4.5.1.1	Control Rod Drive Mechanism (CRDM) and Gray Rod Drive Mechanism (GRDM) Materials Specifications	4.5-1	I
4.5.1.2	Fabrication and Processing of Austenitic Stainless Steel Components	4.5-2	I
4.5.1.3	Contamination Protection and Cleaning of Austenitic Stainless Steel	4.5-3	I
4.5.1.4	Other Materials	4.5-3	I
4.6	FUNCTIONAL DESIGN OF REACTIVITY CONTROL SYSTEMS	4.6-1	I
4.6.1	Information for the Control Rod Drive System (CRDS)	4.6-1	I
4.6.2	Evaluation of the CRDS	4.6-1	I
4.6.3	Testing and Verification of the CRDS	4.6-2	I

# TABLE OF CONTENTS (cont)

<u>Section</u>	<u>Title</u>	<u>Page</u>	Reference SAR Section <u>Status</u>
4.6.4	Information for Combined Performance of Reactivity Systems	4.6-2	I
4.6.5	Evaluation of Combined Performance	4.6-3	I
4.6.6	References	4.6-4	I
5.0	REACTOR COOLANT SYSTEM AND CONNECTED SYSTEMS	5.0-1	NA
6.0	ENGINEERED SAFETY FEATURES	6.0-1	NA
7.0	INSTRUMENTATION AND CONTROLS	7.0-1	NA
8.0	ELECTRIC POWER	8.0-1	NA
9.0	AUXILIARY SYSTEMS	9.0-1	NA
10.0	STEAM AND POWER CONVERSION SYSTEM	10.0-1	NA
11.0	RADIOACTIVE WASTE MANAGEMENT	11.0-1	NA
12.0	RADIATION PROTECTION	12.0-1	NA
13.0	CONDUCT OF OPERATIONS	13.0-1	NA
14.0	INITIAL TEST PROGRAM	14.0-1	NA
15.0	ACCIDENT ANALYSES	15.0-1	II
15.0.1	General	15.0-1	II
15.0.2	Classification of Plant Conditions	15.0-1	II
15.0.2.1	Condition I - Normal Operation and Operational Transients	15.0-2	II
15.0.2.2	Condition II - Faults of Moderate Frequency	15.0-4	II
15.0.2.3	Condition III - Infrequent Faults	15.0-6	II
15.0.2.4	Condition IV - Limiting Faults	15.0-7	II
15.0.3	Optimization of Control Systems	15.0-8	II
15.0.4	Plant Characteristics and Initial Conditions Assumed in the Accident Analyses	15.0-9	II
15.0.4.1	Design Plant Conditions	15.0-9	II



# TABLE OF CONTENTS (cont)

<u>Section</u>	<u>Title</u>	<u>Page</u>	Reference SAR Section <u>Status</u>
15.0.4.2	Initial Conditions	15.0-9	II
15.0.4.3	Power Distribution	15.0-10	II
15.0.5	Reactivity Coefficients Assumed in the Accident Analyses	15.0-11	II
15.0.6	Rod Cluster Control Assembly Insertion Characteristics	15.0-12	II
15.0.7	Trip Points and Time Delays to Trip Assumed in Accident Analyses	15.0-13	II
15.0.8	Instrumentation Drift and Calorimetric Errors - Power Range Neutron Flux	15.0-14	II
15.0.9	Plant Systems and Components Available for Mitigation of Accident Effects	15.0-15	II
15.0.10	Fission Product Inventories	15.0-16	II
15.0.10.1	Inventory in the Core	15.0-16	II
15.0.10.2	Inventory in the Fuel Pellet Clad Gap	15.0-16	II
15.0.10.3	Inventory in the Reactor Coolant	15.0-16	II
15.0.11	Residual Decay Heat	15.0-17	II
15.0.11.1	Total Residual Heat	15.0-17	II
15.0.12	Computer Codes Utilized	15.0-17	II
15.0.12.1	FACTRAN	15.0-17	II
15.0.12.2	LOFTRAN	15.0-18	II
15.0.12.3	TWINKLE	15.0-19	II
15.0.12.4	THINC	15.0-19	II
15.0.13	References	15.0-19	II



# TABLE OF CONTENTS (cont)

<u>Section</u>	<u>Title</u>	<u>Page</u>	Reference SAR Section <u>Status</u>
15.4	REACTIVITY AND POWER DISTRIBUTION ANOMALIES	15.4-1	II
15.4.1	Uncontrolled Rod Cluster Control Assembly Bank Withdrawal from a Subcritical or Low-Power Startup Condition	15.4-2	I
15.4.1.1	Identification of Causes and Accident Description	15.4-2	I
15.4.1.2	Analysis of Effects and Consequences	15.4-4	I
15.4.1.2.1	Method of Analysis	15.4-4	I
15.4.1.2.2	Results	15.4-7	I
15.4.1.3	Conclusions	15.4-7	I
15.4.2	Uncontrolled Rod Cluster Control Assembly Bank Withdrawal at Power	15.4-8	I
15.4.2.1	Identification of Causes and Accident Description	15.4-8	I
15.4.2.2	Analysis of Effects and Consequences	15.4-10	I
15.4.2.2.1	Method of Analysis	15.4-10	I
15.4.2.2.2	Results	15.4-12	I
15.4.2.3	Radiological Consequences	15.4-14	I
15.4.2.4	Conclusions	15.4-14	I
15.4.3	Rod Cluster Control Assembly Misoperation (System Malfunction or Operator Error)	15.4-15	II
15.4.3.1	Identification of Causes and Accident Description	15.4-15	II
15.4.3.2	Analysis of Effects and Consequences	15.4-17	II
15.4.3.2.1	Method of Analysis for Dropped or Misaligned RCCA	15.4-18	II
15.4.3.2.2	Statically Misaligned RCCA Results	15.4-18	I
15.4.3.2.3	Single RCCA Withdrawal Method of Analysis	15.4-19	I

# TABLE OF CONTENTS (cont)

<u>Section</u>	<u>Title</u>	<u>Page</u>	Reference SAR Section <u>Status</u>
15.4.3.2.4	Single RCCA Withdrawal Results	15.4-20	I
15.4.3.3	Radiological Consequences	15.4-20	I
15.4.3.4	Conclusions	15.4-21	I
15.4.7	Inadvertent Loading and Operation of a Fuel Assembly in an Improper Position	15.4-21	I
15.4.7.1	Identification of Causes and Accident Description	15.4-21	I
15.4.7.2	Analysis of Effects and Consequences	15.4-22	I
15.4.7.2.1	Method of Analysis	15.4-22	I
15.4.7.2.2	Results	15.4-23	I
15.4.7.3	Radiological Consequences	15.4-24	I
15.4.7.4	Conclusions	15.4-24	I
15.4.8	Spectrum of Rod Cluster Control Assembly Ejection Accident	15.4-25	I
15.4.8.1	Identification of Causes and Accident Description	15.4-25	I
15.4.8.1.1	Design Precautions and Protection	15.4-25	I
15.4.8.1.1.1	Mechanical Design	15.4-25	I
15.4.8.1.1.2	Nuclear Design	15.4-26	I
15.4.8.1.1.3	Reactor Protection	15.4-27	I
15.4.8.1.1.4	Effects on Adjacent Housings	15.4-27	I
15.4.8.1.1.5	Effects of Rod Travel Housing Longitudinal Failures	15.4-27	I
15.4.8.1.1.6	Effects of Rod Travel Housing Circumferential Failures	15.4-28	I
15.4.8.1.1.7	Possible Consequences	15.4-28	I
15.4.8.1.1.8	Summary	15.4-28	I
15.4.8.1.2	Limiting Criteria	15.4-29	I

# TABLE OF CONTENTS (cont)

<u>Section</u>	<u>Title</u>	<u>Page</u>	Reference SAR Section <u>Status</u>
15.4.8.2	Analysis of Effects and Consequences	15.4-30	I
15.4.8.2.1	Calculation of Basic Parameters	15.4-32	I
15.4.8.2.1.1	Ejected Rod Worths and Hct Channel Factors	15.4-32	I
15.4.8.2.1.2	Reactivity Feedback Weighting Factors	15.4-33	I
15.4.8.2.1.3	Moderator and Doppler Coefficients	15.4-34	I
15.4.8.2.1.4	Delayed Neutron Fraction, $\beta_{eff}$	15.4-34	I
15.4.8.2.1.5	Trip Reactivity Insertion	15.4-34	I
15.4.8.2.1.6	Reactor Protection	15.4-35	I
15.4.8.2.1.7	Results	15.4-36	I
15.4.8.2.1.8	Fission Product Release	15.4-39	I
15.4.8.2.1.9	Pressure Surge	15.4-39	I
15.4.8.2.1.10	Lattice Deformation	15.4-39	I
15.4.8.3	Radiological Consequences	15.4-40	I
15.4.8.3.1	Analytical Assumptions	15.4-40	I
15.4.8.3.1.1	Source Term Calculations	15.4-40	I
15.4.8.3.1.2	Mathematical Models Used in the Analysis	15.4-41	I
15.4.8.3.1.3	Identification of Leakage Pathways and Resultant Leakage Activity	15.4-41	I
15.4.8.3.2	Identification of Uncertainties and Conservative Elements in the Analysis	15.4-42	I
15.4.8.3.3	Conclusions	15.4-43	I
15.4.8.3.3.1	Filter Loadings	15.4-43	I
15.4.8.3.3.2	Dose to Receptor at the Exclusion Area Boundary and Low Population Zone Outer Boundary	15.4-43	I
15.4.9	References	15.4-44	II

# TABLE OF CONTENTS (cont)

<u>Section</u>	<u>Title</u>	<u>Page</u>	Reference SAR Section <u>Status</u>
15A	ACCIDENT ANALYSIS RADIOLOGICAL CONSEQUENCES EVALUATION MODELS AND PARAMETERS	15.A-1	II
15A.1	General Accident Parameters	15.A-1	II
15A.2	Offsite Radiological Consequences Calculational Models	15.A-1	II
15A.2.1	Accident Release Pathways	15.A-2	II
15A.2.2	Single-Region Release Model	15.A-2	II
15A.2.3	Two-Region Spray Model in Containment (LOCA)	15.A-4	II
15A.2.4	Offsite Thyroid Dose Calculation Model	15.A-5	II
15A.2.5	Offsite Beta - Skin Dose Calculational Model	15.A-6	II
15A.2.6	Offsite Gamma-Body Dose Calculational Model	15.A-6	II
15A.3	Control Room Radiological Consequences Calculational Models	15.A-7	II
15A.3.1	Integrated Activity in Control Room	15.A-7	II
15A.3.2	Integrated Activity Concentration in Control Room From Single-Region System	15.A-8	II
15A.3.3	Control Room Thyroid Dose Calculational Model	15.A-9	II
15A.3.4	Control Room Beta - Skin Dose Calculational Model	15.A-10	II
15A.3.5	Control Room Gamma - Body Dose Calculation	15.A-11	II
15A.3.5.1	Model for Radiological Consequences Due to Radioactive Cloud External to the Control Room	15.A-11	II

# TABLE OF CONTENTS (cont)

<u>Section</u>	<u>Title</u>	<u>Page</u>	Reference SAR Section <u>Status</u>
15A.4	References	15.A-12	II
16.0	TECHNICAL SPECIFICATIONS	16.0-1	N/A
17.0	QUALITY ASSURANCE	17.1-1	II
17.1	Quality Assurance During Design and Construction	17.1-1	II
17.1.1	References	17.1-1	II

## TABLE OF CONTENTS (cont)

### KEY TO "REFERENCE SAR SECTION STATUS" COLUMN:

#### Category I

Those sections which are complete and for which no additional information is to be provided for the PDA application.

#### Category II

Those sections which are complete insofar as providing material relevant to this system module but for which additional information will be provided in support of subsequent modules.

#### Category III

Those sections for which information on interfacing systems will be provided at a later date.

#### NA

Those sections for which categorization is not applicable. Only the section titles are included for clarity.

# TABLE OF CONTENTS (cont)

## LIST OF TABLES

<u>Number</u>	<u>Title</u>	<u>Page</u>
1.3-1	Design Comparison	1.3-2
1.6-1	Material Incorporated by Reference	1.6-2
1.8-1	Standard Review Plan Deviations	1.8-2
1.8-2	Conformance to US NRC Regulatory Guides Applicable to the WAPWR Reactor System	1.8-3
3.1-1	GDC Applicable to the Reactor System	3.1-2
3.2-1	Classification of Structures, Systems, and Components for the Reactor System	3.2-3
4.1-1	Reactor Design Comparison Table	4.1-4
4.1-2	Analytical Techniques In Core Design	4.1-9
4.1-3	Design Loading Conditions Considered for Reactor Core Components	4.1-11
4.3-1	Reactor Core Description	4.3-73
4.3-2	Nuclear Design Parameters	4.3-77
4.3-3	Reactivity Requirements for Rod Cluster Control Assemblies	4.3-80
4.3-4	Benchmark Critical Experiments	4.3-82
4.3-5	Axial Stability Index for Pressurized Water Reactor Core With a 12-Foot Height	4.3-83
4.3-6	Typical Neutron Flux Levels ( $n/cm^2$ -sec) At Full Power	4.3-84
4.3-7	Comparison of Measured and Calculated Doppler Defects	4.3-85
4.3-8	Saxton Core II Isotopics Rod MY, Axial Zone 6	4.3-86
4.3-9	Critical Boron Concentrations, HZP, BOL	4.3-87
4.3-10	Benchmark Critical Experiments, B <sub>4</sub> C Control Rod Worth	4.3-88



# TABLE OF CONTENTS (cont)

## LIST OF TABLES

<u>Number</u>	<u>Title</u>	<u>Page</u>
4.3-11	Comparison of Measured and Calculated Moderator Coefficients at HZP, BOL	4.3-89
4.4-1	Thermal and Hydraulic Comparison Table	4.4-58
15.0-1	Nuclear Steam Supply System Power Ratings	15.0-21
15.0-2	Values of Pertinent Plant Parameters Utilized In Accident Analyses (ITDP)	15.0-22
15.0-2a	Values of Pertinent Plant Parameters Utilized In Accident Analyses (non-ITDP)	15.0-23
15.0-3	Summary of Initial Conditions and Computer Codes Used	15.0-24
15.0-4	Trip Points and Time Delays to Trip Assumed In Accident Analyses	15.0-27
15.0-5	Determination of Maximum Overpower Trip Point - Power Range Neutron Flux Channel-Based on Nominal Setpoint Considering Inherent Instrument Errors	15.0-28
15.0-6	Plant Systems and Equipment Available for Transient and Accident Conditions	15.0-30
15.0-7	Fuel and Rod Gap Inventories, Core (Ci)	15.0-34
15.0-8	Reactor Coolant Iodine Concentrations for 1 $\mu$ Ci/gram and 60 $\mu$ Ci/gram of Dose Equivalent I-131	15.0-35
15.0-9	Reactor Coolant Noble Gas Specific Activity Based on One Percent Defective Fuel	15.0-36
15.0-10	Iodine Appearance Rates In the Reactor Coolant (Curies/sec.)	15.0-37



# TABLE OF CONTENTS (cont)

## LIST OF TABLES

<u>Number</u>	<u>Title</u>	<u>Page</u>
15.4-1	Time Sequence of Events for Incidents Which Result in Reactivity and Power Distribution Anomalies	15.4-46
15.4-2	Minimum Calculated DNBR for Rod Cluster Control Assembly Misalignment	15.4-50
15.4-3	Parameters Used in the Analysis of the Rod Cluster Control Assembly Ejection Accident	15.4-51
15.4-4	Parameters Used in Evaluating the Radiological Consequences of a Control Rod Ejection Accident (For a Typical Four-Loop Westinghouse PWR)	15.4-52
15.4-5	Radiological Consequences of a Control Rod Ejection Accident (For a Typical Four-Loop Westinghouse PWR)	15.4-55
15A-1	Parameters Used in Accident Analysis	15.A-13
15A-2	Limiting Short-Term Atmospheric Dispersion Factors for Accident Analysis ( $S/M^3$ )*	15.A-14
15A-3	Dose Conversion Factors Used in Accident Analysis	15.A-15

## TABLE OF CONTENTS (cont)

### LIST OF FIGURES

<u>Number</u>	<u>Title</u>
1.2-1	Fuel Assembly Outline
1.2-2	Reactor Vessel
1.2-3	Integrated Head Package
1.2-4	Displacer Rod Drive Mechanism
1.2-5	Comparison of 414 and WAPWR
3.9-1	Typical Full-Length Control Rod Drive Mechanism
3.9-2	Typical Full-Length Control Rod Drive Mechanism Schematic
3.9-3	Nominal Latch Clearance at Minimum and Maximum Temperatures
3.9-4	Nominal Control Rod Drive Mechanism Latch Clearance Thermal Effect
3.9-5	DRDM Vent System
3.9-6	Displacer Rod Drive Mechanism
3.9-7	WAPWR Reactor Internals (General Assembly Layout)
3.9-8	WAPWR Calandria Conceptual Design Layout
3.9-9	WAPWR, WDRC, RCCA Cross Section
3.9-10	WAPWR Inner Barrel Conceptual Design Layout
3.9-11	Radial Reflector Overall Plan View (Quadrant)
3.9-12	WAPWR Radial Reflector Module General Assembly (Typical)
4.2-1	19x19 Fuel Assembly With 16 Guide Thimbles
4.2-2	WAPWR 19x19 Fuel Assembly

## TABLE OF CONTENTS (cont)

### LIST OF FIGURES

<u>Number</u>	<u>Title</u>
4.2-3	Fuel Rod Schematic
4.2-4	Top and Bottom Nozzles
4.2-5	Guide Thimble to Bottom Grid and Nozzle Joint
4.2-6	Plan View of Mid-Grid to Guide Thimble Joint (Bottom View)
4.2-7	Elevation View of Mid-Grid to Guide Thimble Joint
4.2-8	Top Grid to Guide Thimble and Top Nozzle Attachment
4.2-9	Rod Cluster Control and Drive Rod
4.2-10	RCCA and Gray Rod Assembly
4.2-11	Gray and Absorber Rodlet Schematic
4.2-12	Secondary Source Rod Schematic
4.2-13	Water Displacer Rodlet Schematic
4.2-14	Water Displacer Assembly
4.2-15	Typical Rod Cluster Arrangement - 19x19 Fuel Assembly Array, 16 Guide Thimbles Per Assembly
4.3-1	First Core Loading Pattern
4.3-2	Production and Consumption of Higher Isotopes
4.3-3	Boron Concentration Versus First Cycle Burnup
4.3-4	Fuel Assembly Cross-Section
4.3-5	Normalized Power Density Distribution Near Beginning of Life, Unrodded Core, Hot Full Power, No Xenon, WDR's and GR's Inserted
4.3-6	Normalized Power Density Distribution Near Beginning of Life, Unrodded Core, Hot Full Power, Equilibrium Xenon, WDR's and GR's Inserted

## TABLE OF CONTENTS (cont)

### LIST OF FIGURES

<u>Number</u>	<u>Title</u>
4.3-7	Normalized Power Density Distribution Near Beginning of Life, Group D at 18% Inserted, Hot Full Power, Equilibrium Xenon, WDR's and GR's Inserted
4.3-8	Normalized Power Density Distribution Near Middle of Life, Unrodded Core, Hot Full Power, Equilibrium Xenon, WDR's and GR's Inserted
4.3-9	Normalized Power Density Distribution, Unrodded Core, Hot Full Power, Equilibrium Xenon, WDR's and GR's Inserted
4.3-10	Normalized Power Density Distribution, Group D at 18% Inserted, Hot Full Power, Equilibrium Xenon, WDR's and GR's Inserted
4.3-11	Normalized Power Density Distribution, Unrodded Core, Hot Full Power, Equilibrium Xenon, Following Withdrawal of WDR's and GR's
4.3-12	Normalized Power Density Distribution, Group D at 18% Inserted, Hot Full Power, Equilibrium Xenon, Following Withdrawal of WDR's and GR's
4.3-13	Normalized Power Density Distribution Near End of Life, Unrodded Core, Hot Full Power, Equilibrium Xenon With WDR's and GR's Withdrawn
4.3-14	Normalized Power Density Distribution Near End of Life, Group D at 18% Inserted, Hot Full Power, Equilibrium Xenon
4.3-15	Rodwise Power Distribution in a Typical Assembly (Assembly F-12), Near Beginning of Life, Hot Full Power, No Xenon, Unrodded Core, WDR's and GR's Inserted

## TABLE OF CONTENTS (cont)

### LIST OF FIGURES

<u>Number</u>	<u>Title</u>
4.3-16	Rodwise Power Distribution in a Typical Assembly (Assembly F-17), Hot Full Power, Equilibrium Xenon, Unrodded Core, WDR's and GR's Inserted
4.3-17	Rodwise Power Distribution in a Typical Assembly (Assembly F-13), Near Beginning of Life, Hot Full Power, No Xenon, Unrodded Core, WDR's and GR's Inserted
4.3-18	Rodwise Power Distribution in a Typical Assembly (Assembly F-13), Hot Full Power, Equilibrium Xenon, Unrodded Core, WDR's and GR's Inserted
4.3-19	Rodwise Power Distribution in a Typical Assembly (Assembly F-12), Near End of Life, Hot Full Power, Equilibrium Xenon, Unrodded Core, WDR's and GR's Withdrawn
4.3-20	Rodwise Power Distribution in a Typical Assembly (Assembly F-13), Near End of Life, Hot Full Power, Equilibrium Xenon, Unrodded Core, WDR's and GR's Withdrawn
4.3-21	Typical Axial Power Shapes Occurring at Beginning of Life, WDR's and GR's Inserted
4.3-22	Typical Axial Power Shapes Occurring at Middle of Life, WDR's and GR's Inserted
4.3-23	Typical Axial Power Shapes Occurring at End of Life, WDR's and GR's Inserted
4.3-24	Typical Axial Power Shapes Occurring at End of Life, WDR's and GR's Withdrawn

## TABLE OF CONTENTS (cont)

### LIST OF FIGURES

<u>Number</u>	<u>Title</u>
4.3-25	Comparison of Assembly Axial Power Distribution With Core Average Axial Distribution Bank Slightly Inserted
4.3-26	Flow Chart for Determining Spike Model
4.3-27	Predicted Power Spike Due to Single Non-flattened Gap in the Adjacent Fuel
4.3-28	Power Spike Factor as a Function of Axial Power
4.3-29	Maximum $F_Q \times$ Power Versus Axial Height During Normal Operation (Typical Envelope)
4.3-30	Peak Linear Power During Control Rod Malfunction Overpower Transient
4.3-31	Peak Linear Power During Boration/Deboronation Overpower Transients
4.3-32	Typical Comparison Between Calculated and Measured Relative Fuel Assembly Power Distribution
4.3-33	Comparison of Calculated and Measured Axial Shape
4.3-34	Comparison of Calculated and Measured Peaking Factor, $[F_Q \times P_{REL}]$ Max Envelope as a Function of Core Height
4.3-35	Doppler Temperature Coefficient at BOL and EOL, Cycle 1
4.3-36	Doppler Only Power Coefficient at BOL and EOL, Cycle 1
4.3-37	Doppler Only Power Defect at BOL and EOL, Cycle 1
4.3-38	Moderator Temperature Coefficient at BOL, Cycle 1, No Rods, WDR's and GR's Inserted

## TABLE OF CONTENTS (cont)

### LIST OF FIGURES

<u>Number</u>	<u>Title</u>
4.3-39	Moderator Temperature Coefficient Near EOL, Cycle 1 WDR's and GR's Inserted
4.3-40	Moderator Temperature Coefficient at EOL, Cycle 1, WDR's and GR's Withdrawn
4.3-41	Moderator Temperature Coefficient as a Function of Boron Concentration, BOL, Cycle 1, No Rods, WDR's and GR's Inserted
4.3-42	Hot Full Power Temperature Coefficient During Cycle 1 for the Critical Boron Concentration
4.3-43	Total Power Coefficient, BOL, EOL, Cycle 1
4.3-44	Total Power Defect, BOL, EOL, Cycle 1
4.3-45a	Rod Cluster Control Assembly and Gray Rod Pattern
4.3-45b	DRDM/WDRG Group Pattern
4.3-46	Accidental Simultaneous Withdrawal of Two Control Banks, EOL, HZP, Banks C and B Moving in Same Plane
4.3-47	Typical Design Trip Curve
4.3-48	Normalized Rod Worth Versus Percent Insertion, All Rods But One
4.3-49	Axial Offset Versus Time, PWR Core With a 12 ft. Height and 121 Assemblies
4.3-50	XY Xenon Test Thermocouple Response Quadrant Tilt Difference Versus Time
4.3-51	Calculated and Measured Doppler Defect and Coefficient at BOL, 2-Loop Plant, 121 Assemblies, 12 ft. Core
4.3-52	Comparison of Calculated and Measured Boron Concentration for 2-Loop Plant, 121 Assemblies, 12 ft. Core



# TABLE OF CONTENTS (cont)

## LIST OF FIGURES

<u>Number</u>	<u>Title</u>
4.3-53	Comparison of Calculated and Measured $C_B$ , 3-Loop Plant, 157 Assemblies, 12 ft. Core
4.3-54	Comparison of Calculated and Measured $C_B$ , 4-Loop Plant, 193 Assemblies, 12 ft. Core
4.4-1	Improved Thermal Design Procedure Illustration
4.4-2	Measured Versus Predicted Critical Heat Flux, WRB-2 Correlation
4.4-3	TDC versus Reynolds Number for 26 inch Grid Spacing
4.4-4	Normalized Radial Flow and Enthalpy Rise Distribution at Elevation of 1/3 of Core Height
4.4-5	Normalized Radial Flow and Enthalpy Rise Distribution at Elevation of 2/3 of Core Height
4.4-6	Normalized Radial Flow and Enthalpy Rise Distribution at Core Exit Elevation
4.4-7	Void Fraction Versus Thermodynamic Quality $H-H_{SAT}/H_g-H_{SAT}$
4.4-8	Thermal Conductivity of $UO_2$ (Data Corrected to 95% Theoretical Density)
4.4-9	Reactor Coolant System Temperature Percent Power Map
4.4-10	Distribution of Incore Instrumentation
15.0-1	Illustration of Core Thermal Limits and DNB Protection (N-Loop Operation)
15.0-2	Doppler Power Coefficient Used In Accident Analysis
15.0-3	RCCA Position vs. Time to Dashpot
15.0-4	Normalized RCCA Reactivity Worth vs. Fraction Insertion



# TABLE OF CONTENTS (cont)

## LIST OF FIGURES

<u>Number</u>	<u>Title</u>
15.0-5	Normalized RCCA Bank Reactivity Worth vs. Normalized Drop Time
15.4-1	Neutron Flux Transient for Uncontrolled Rod Withdrawal from a Subcritical Condition
15.4-2	Thermal Flux Transient for Uncontrolled Rod Withdrawal from a Subcritical Condition
15.4-3	Fuel and Clad Temperature for Uncontrolled Rod Withdrawal from a Subcritical Condition
15.4-4	Nuclear Power Transient and Heat Flux Transient for Uncontrolled Rod Withdrawal from Full Power with Minimum Feedback and 75 pcm/sec Withdrawal Rate
15.4-5	Pressurizer Pressure and Water Volume Transients for Uncontrolled Rod Withdrawal from Full Power with Minimum Feedback and 75 pcm/sec Withdrawal Rate
15.4-6	Core Average Temperature Transient and DNBR vs. Time for Uncontrolled Rod Withdrawal from Full Power with Minimum Feedback and 75 pcm/sec Withdrawal Rate
15.4-7	Nuclear Power Transient and Heat Flux Transients for Uncontrolled Rod Withdrawal from Full Power with Minimum Feedback and 1 pcm/sec Withdrawal Rate
15.4-8	Pressurizer Pressure and Water Volume Transients for Uncontrolled Rod Withdrawal from Full Power with Minimum Feedback and 1 pcm/sec Withdrawal Rate

## TABLE OF CONTENTS (cont)

### LIST OF FIGURES

<u>Number</u>	<u>Title</u>
15.4-9	Core Average Temperature Transient and DNBR vs. Time for Uncontrolled Rod Withdrawal from Full Power with Minimum Feedback and 1 pcm/sec Withdrawal Rate
15.4-10	Rod Withdrawal at Power (100% Power)
15.4-11	Rod Withdrawal at Power (60% Power)
15.4-12	Representative % Change in Local Assy. Avg. Power for Interchange Between Region 1 and Region 3 Assy.
15.4-13	Representative % Change in Local Assy. Avg. Power for Interchange Between Region 1 and Region 2 Assy. with BP Rods Retained by the Region 2 Assy.
15.4-14	Representative % Change in Local Assy. Avg. Power for Interchange Between Region 1 and Region 2 Assy. with the BP Rods Transferred to Region 1 Assy.
15.4-15	Representative % Change in Local Assy. Avg. Power for Enrichment Error (Region 2 Assy. Loaded into Core Central Position)
15.4-16	Representative % Change in Local Assy. Avg. Power for Loading Region 2 Assy. into Region 1 Position Near Core Periphery
15.4-17	Nuclear Power Transient BOL, Voided, Full Power
15.4-18	Hot Spot Fuel and Clad Temperature vs. Time BOL, Voided, Full Power

TABLE OF CONTENTS (cont)

LIST OF FIGURES

<u>Number</u>	<u>Title</u>
15.4-19	Nuclear Power Transient, EOL, Flooded, Zero Power
15.4-20	Hot Spot Fuel and Clad Temperatures vs. Time EOL, Flooded, Zero Power
15.A-1	Release Pathways