



# Public Service

2420 W. 26th Avenue Suite 100 - D Denver, CO 80211

**Public Service  
Company of Colorado**  
P.O. Box 840  
Denver, CO 80201 - 0840  
(303) 571 - 7511


April 22, 1985  
Fort St. Vrain  
Unit No. 1  
P-85134

Regional Administrator  
Region IV  
U.S. Nuclear Regulatory Commission  
611 Ryan Plaza Drive, Suite 1000  
Arlington, Texas 76011

Attn: Mr. E. H. Johnson

*50-267*

Subject: Station Battery  
Capacity to Satisfy  
Load Profile

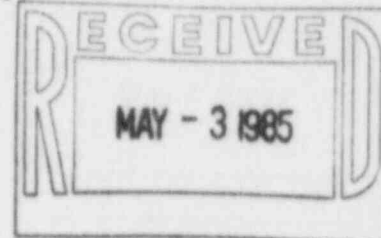

Dear Mr. Johnson:

Letter P-85077 (dated 3/11/85), Attachment B-Battery Sizing, states a minimum battery capacity of 1080 amp/hrs would be required to satisfy the FSV emergency DC load profile. The Exide computer modeling of our load profile requirements shows this number to be 1058 amp/hrs.

The Exide program specifies an FTC-15, 1180 amp/hr battery as sufficient to satisfy our needs, with an 11.5% margin. This calculates to a requirement of the above-stated 1058 amp/hrs.

This correspondence is to amend the 1080 amp/hr reference in letter P-85077 to 1058 amp/hrs of required battery capacity.

Very truly yours,

*Don W. Warembourg*  
Don W. Warembourg  
Manager, Nuclear Engineering  
Division

DWW/MR/dh

Reviewed by: *R.D. Schenck*

85-280

8505160509 850422  
PDR ADOCK 05000267  
P PDR

4005 1/0  
Return original to RIV