

A-E-D-I


(PLEASE PRINT OR TYPE ALL REQUIRED INFORMATION)

EVENT DESCRIPTION AND PROBABLE CONSEQUENCES (10)

| | | | | | | | | | | | | | | | | | |
|--|----|---------------|----|-----------------------|----|-----------------|----|---------------|----|----------------------|----|------------------|----|----------------------|---|------------------------|--|
| SYSTEM CODE | | CAUSE CODE | | CAUSE SUBCODE | | COMPONENT CODE | | | | COMP. SUBCODE | | VALVE SUBCODE | | | | | |
| 0 | 9 | S | A | E | B | P | E | N | E | T | R | A | Z | | | | |
| 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | | | | |
| LER/RO REPORT NUMBER | | EVENT YEAR | | SEQUENTIAL REPORT NO. | | OCCURRENCE CODE | | REF. JRT TYPE | | REVISION NO. | | | | | | | |
| 17 | | 7 | 9 | — | 0 | 1 | 9 | 1 | 0 | 1 | T | — | 0 | | | | |
| 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | | | | | | |
| ACTION TAKEN | | FUTURE ACTION | | EFFECT ON PLANT | | SHUTDOWN METHOD | | HOURS | | ATTACHMENT SUBMITTED | | NPRD-4 FORM SUB. | | PRIME COMP. SUPPLIER | | COMPONENT MANUFACTURER | |
| B | Z | Z | Z | Z | 0 | 0 | 0 | 0 | Y | N | N | C | 3 | 1 | 0 | | |
| 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 | 42 | 43 | 44 | 45 | 46 | 47 | | | |
| CAUSE DESCRIPTION AND CORRECTIVE ACTIONS | | | | | | | | | | | | | | | | | |

FACILITY STATUS (1) 5 (E) (28) % POWER (0) 8 (5) (29) OTHER STATUS (30) NA METHOD OF DISCOVERY (B) (31) SURVEILLANCE TEST DISCOVERY DESCRIPTION (32)
 ACTIVITY CONTENT RELEASED OF RELEASE (1) 6 (Z) (33) (Z) (34) AMOUNT OF ACTIVITY (35) NA LOCATION OF RELEASE (36)
 PERSONNEL EXPOSURES NUMBER (1) 7 (0) 0 0 (37) TYPE (Z) (38) DESCRIPTION (39) NA
 PERSONNEL INJURIES NUMBER (1) 8 (0) 0 0 (40) DESCRIPTION (41) NA
 LOSS OF OR DAMAGE TO FACILITY TYPE (1) 9 (Z) (42) DESCRIPTION (43) NA
 PUBLICITY ISSUED (2) 0 (N) (44) DESCRIPTION (45) NA
 7912310 504 NRC USE ONLY 90000011


PHONE: 608-689-2331

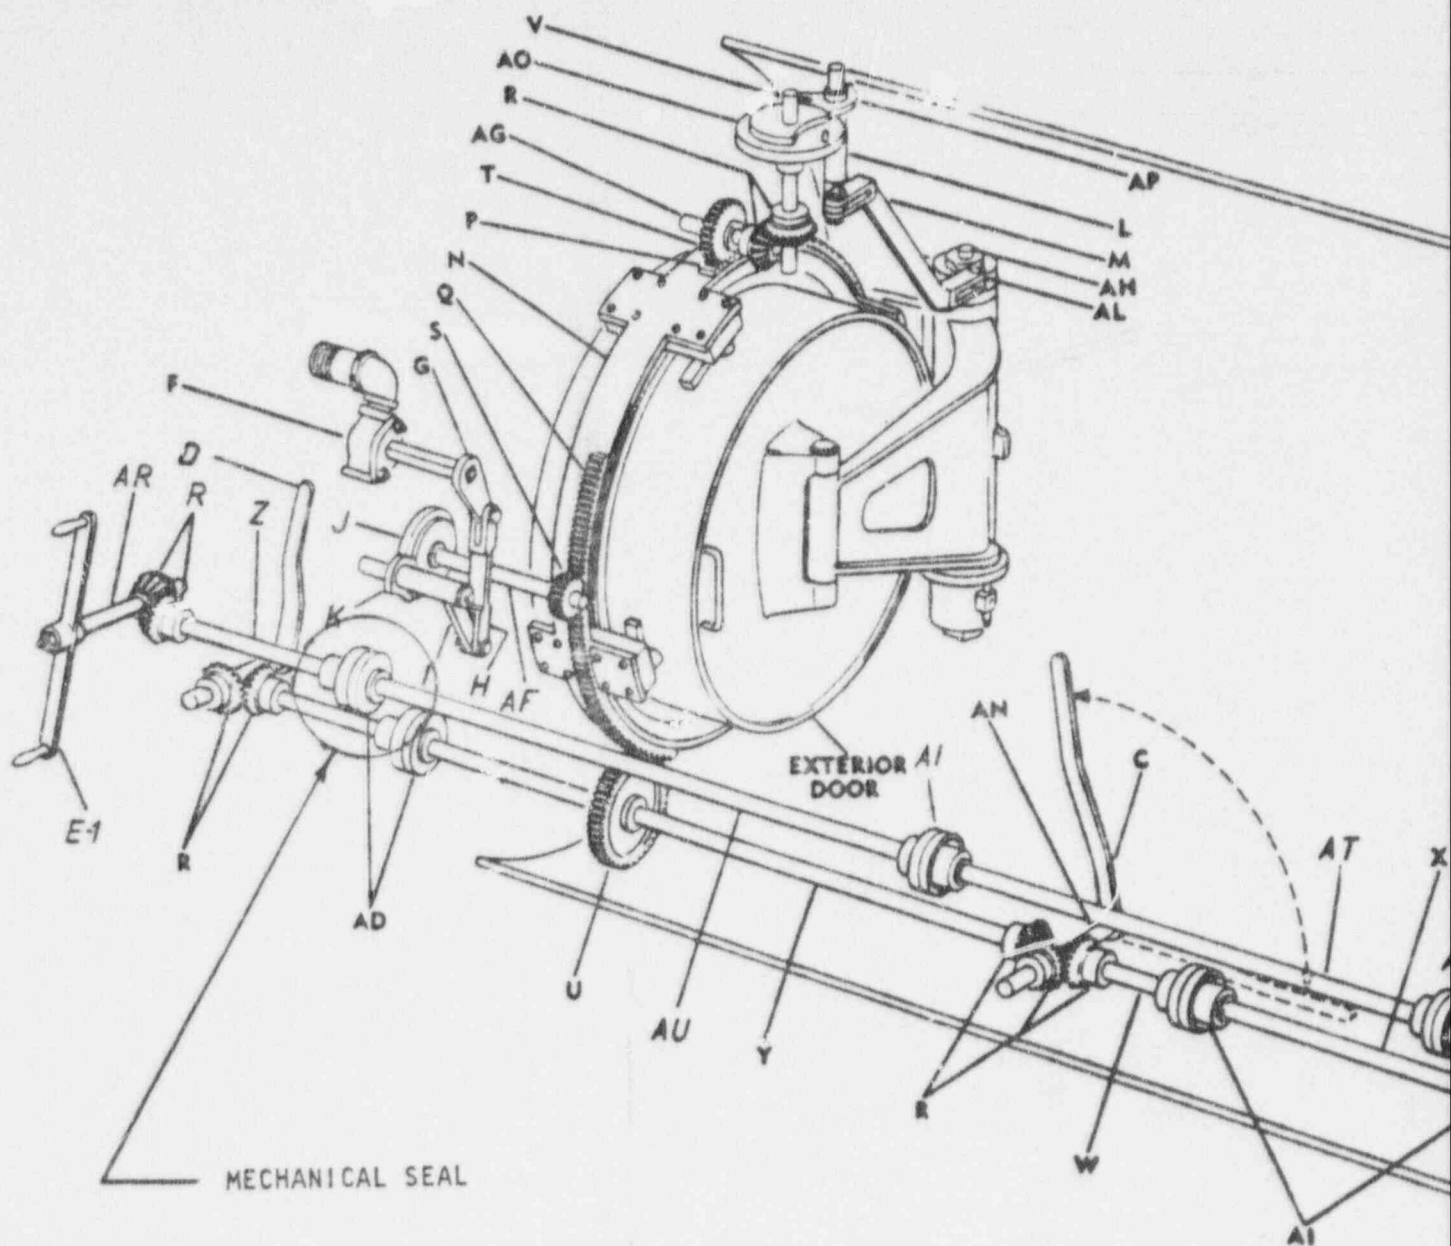

90000012

FIGURE 1
2'-6" DIAM. ESCAPE

POOR ORIGINAL

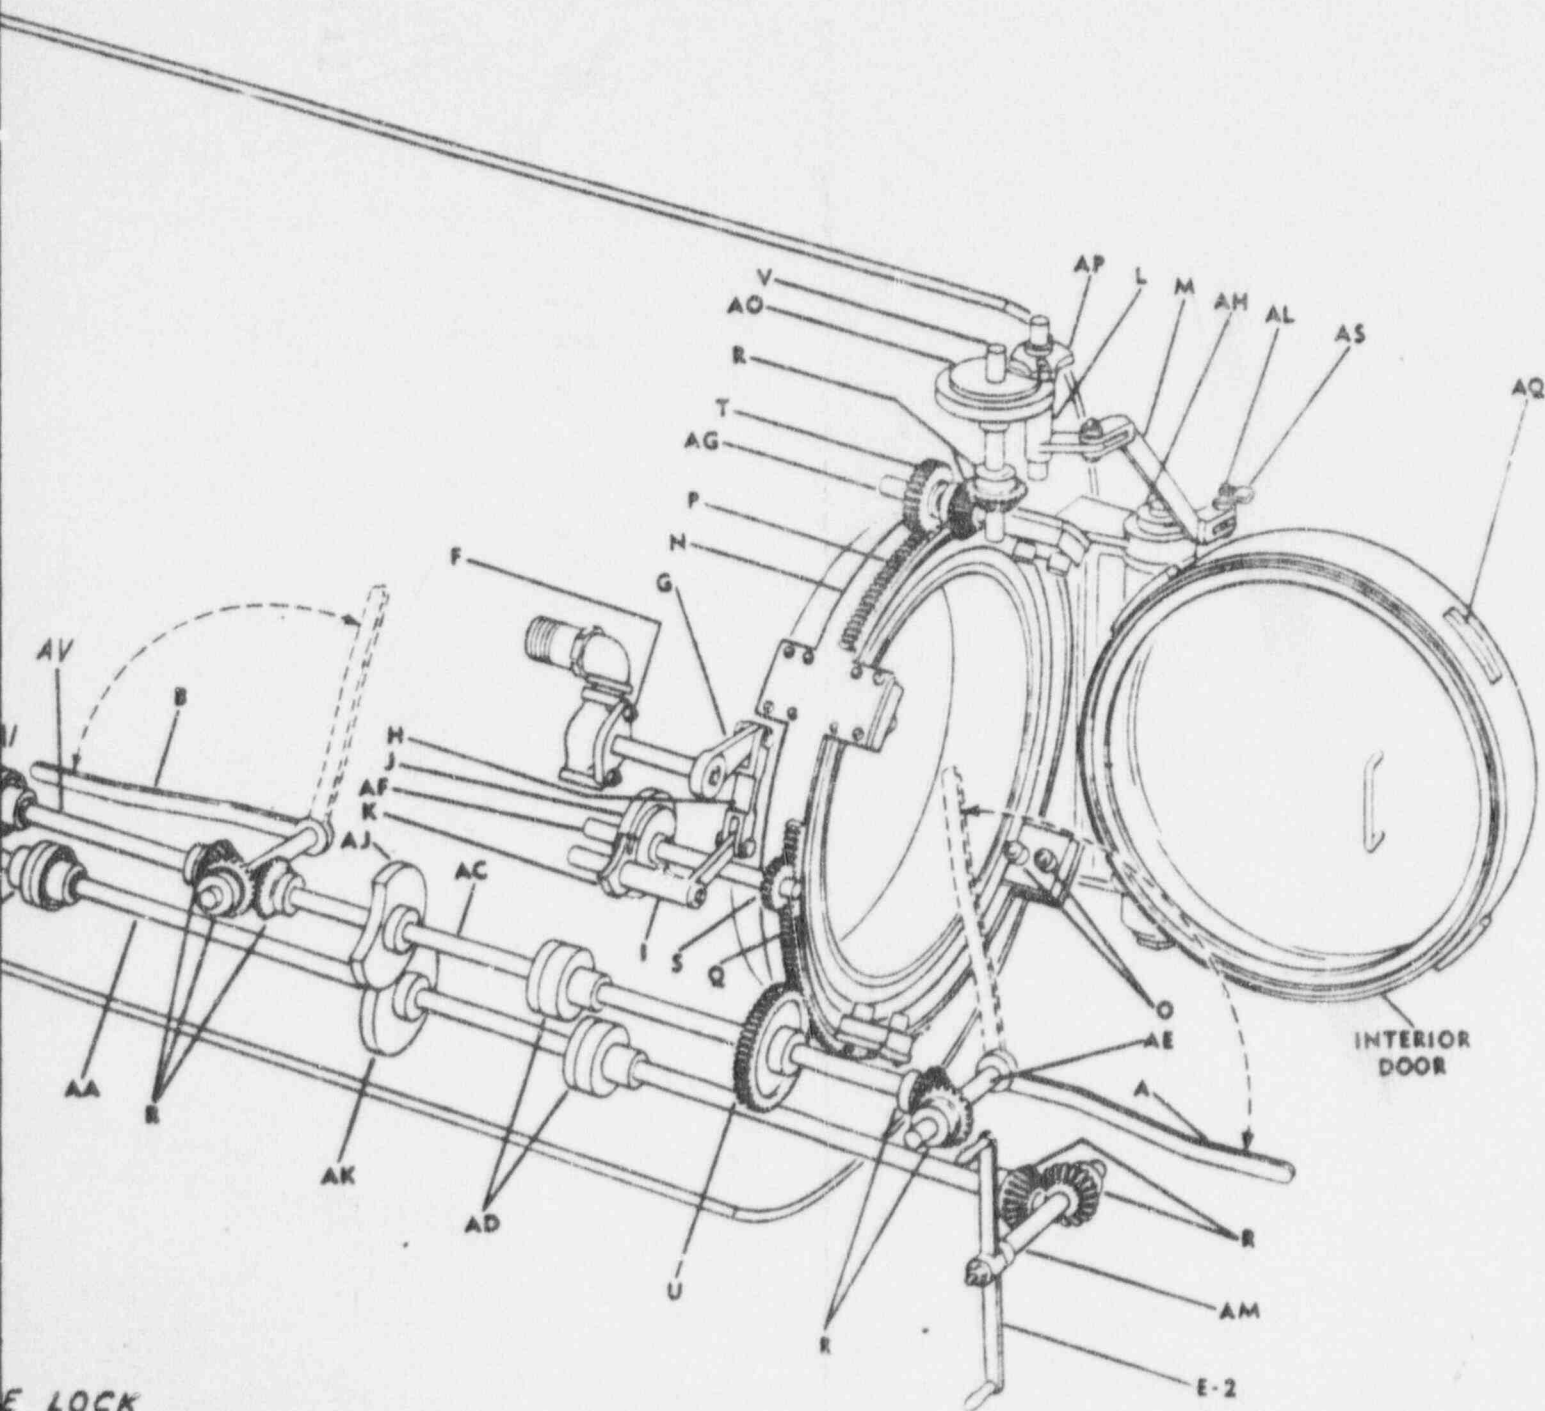

E LOCK

POOR ORIGINAL

90000013

1-1/4" N.P.T. FOR LUBRICATION
INLET

OUTSIDE

POOR ORIGINAL

4 7/8" GLAND O.D.
± 1/16"

BOX BORE

5.000" SHAFT O.D.
1.125"

2 1/4" ROTARY O.D.

AIRLOCK SIDE

4-1/2" HOLS ON 4" BC
(EQ. SPACED)

FOR-CHICAGO BRIDGE & IRON CO.

USER

ORDER NO C-122151-6902

DURA SEAL SERIAL

FLUID

TEMP.

PRESS

RPM.

EQUIPMENT

OUTSIDE RA DURA SEAL

RI 6-5-68 INSERT MAT'L WAS KRON'G

| NO | PART NAME | MATERIAL | NO | PART NAME | MATERIAL |
|----|------------|----------------|----|---------------|-----------|
| 1 | GLAND RING | STEEL | C | SPRINGS | #20 STAIN |
| 2 | INSERT | #1 BRONZE | D | DRIVE PINS | #20 STAIN |
| 3 | SEAL RING | 316SS/STELLITE | G | GASKET | K&M-340 |
| 4 | COLLAR | 316 STAIN. | P | SHAFT PACKING | VITON |
| 5 | O-RINGS | VITON | S | SET SCREWS | 20 STAIN |

DURAMETALLIC CORPORATION

KALAMAZOO, MICH

QTY 30,994

DATE 1-2-63

DESIGN P. SIKHA

SCALE NONE

DRAWING NO

FORM IF-39,525

ID-45,026-R1

2366CPRS

FIGURE 2

900000114