


ENCLOSURE 1

BRUNSWICK STEAM ELECTRIC PLANT, UNIT NO. 1
DOCKET NO. 50-325
LICENSE NO. DPR-71
TRANSMITTAL OF CORE OPERATING LIMITS REPORT,
SUPPLEMENTAL RELOAD LICENSING REPORT, AND
LOSS-OF-COOLANT-ACCIDENT ANALYSIS REPORT


BRUNSWICK UNIT 1, CYCLE 11
CORE OPERATING LIMITS REPORT

BRUNSWICK UNIT 1, CYCLE 11
CORE OPERATING LIMITS REPORT

September 1996

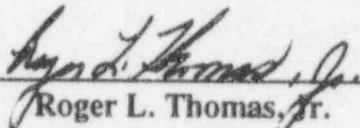Prepared By: 
Roger L. Thomas, Jr.

Date: 9/5/96

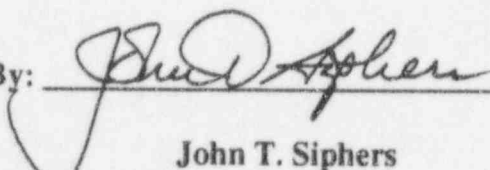Approved By: 

John T. Siphers
Superintendent
BWR Fuel Engineering

Date: 9/9/96

LIST OF EFFECTIVE PAGES

<u>Page(s)</u>	<u>Revision</u>
1-18	0

INTRODUCTION AND SUMMARY

This report provides the values of the power distribution limits and control rod withdrawal block instrumentation setpoints for Brunswick Unit 1, Cycle 11 as required by Technical Specification 6.9.3.1. The values of the Average Planar Linear Heat Generation Rate (APLHGR) limits, along with associated core flow and core power adjustment factors are provided as required by Technical Specification 6.9.3.1.a. The values of the Minimum Critical Power Ratio (MCPR) limits, along with associated core flow and core power adjustment factors are provided as required by Technical Specifications 6.9.3.1.b and 6.9.3.1.c. The control rod block upscale trip setpoints and allowable values are provided as required by Technical Specification 6.9.3.1.d.

Per Technical Specifications 6.9.3.2 and 6.9.3.3, these values have been determined using NRC-approved methodology and are established such that all applicable limits of the plant safety analysis are met.

Preparation of this report was performed in accordance with Quality Assurance requirements as specified in Reference 1.

APLHGR LIMITS

The limiting APLHGR value for the most limiting lattice (excluding natural uranium) of each fuel type as a function of planar average exposure is given in Figures 1 through 8. These values were determined with the SAFER/GESTR LOCA methodology described in GESTAR-II (Reference 2). Figures 1 through 8 are to be used when hand calculations are required as specified in Technical Specification 3.2.1.

The core flow and core power adjustment factors for use in Technical Specification 3.2.1 are presented in Figures 9 and 10. For any given flow/power state, the minimum of MAPLHGR(F) determined from Figure 9 and MAPLHGR(P) determined from Figure 10 is used to determine the governing limit.

MCPR LIMITS

The ODDYN OPTION A, ODDYN OPTION B, and non-pressurization transient MCPR limits for use in Technical Specifications 3.2.2.1 and 3.2.2.2 for each fuel type as a function of cycle average exposure are given in Table 1. These values were determined with the GEMINI methodology and GEXL-PLUS critical power correlation described in GESTAR-II (Reference 2) and are consistent with the Safety Limit MCPR of 1.10 specified by Technical Specification 2.1.2.

The core flow and core power adjustment factors for use in Technical Specification 3.2.2.1 are presented in Figures 11 and 12. For any given flow/power state, the maximum of MCPR(F) determined from Figure 11 and MCPR(P) determined from Figure 12 is used to determine the governing limit.

ROD BLOCK INSTRUMENTATION SETPOINTS

The nominal trip setpoints and allowable values of the control rod withdrawal block instrumentation for use in Technical Specification 3.3.4 (Table 3.3.4-2) are presented in Table 2. These values were determined consistent with the bases of the ARTS program and the determination of MCPR limits with the GEMINI methodology and GEXL-PLUS critical power correlation described in GESTAR-II (Reference 2).

REFERENCE(s)

- 1) "Preparation of the B1C11 Core Operating Limits Report," Design Calculation 1B21-0524-9501608, Revision A, September 1996.
- 2) NEDE-24011-P-A; "General Electric Standard Application for Reactor Fuel;" (latest approved version).

Figure 1

FUEL TYPE BD323B (GE8X8EB)
AVERAGE PLANAR LINEAR HEAT
GENERATION RATE (APLHGR) LIMIT
VERSUS AVERAGE PLANAR EXPOSURE

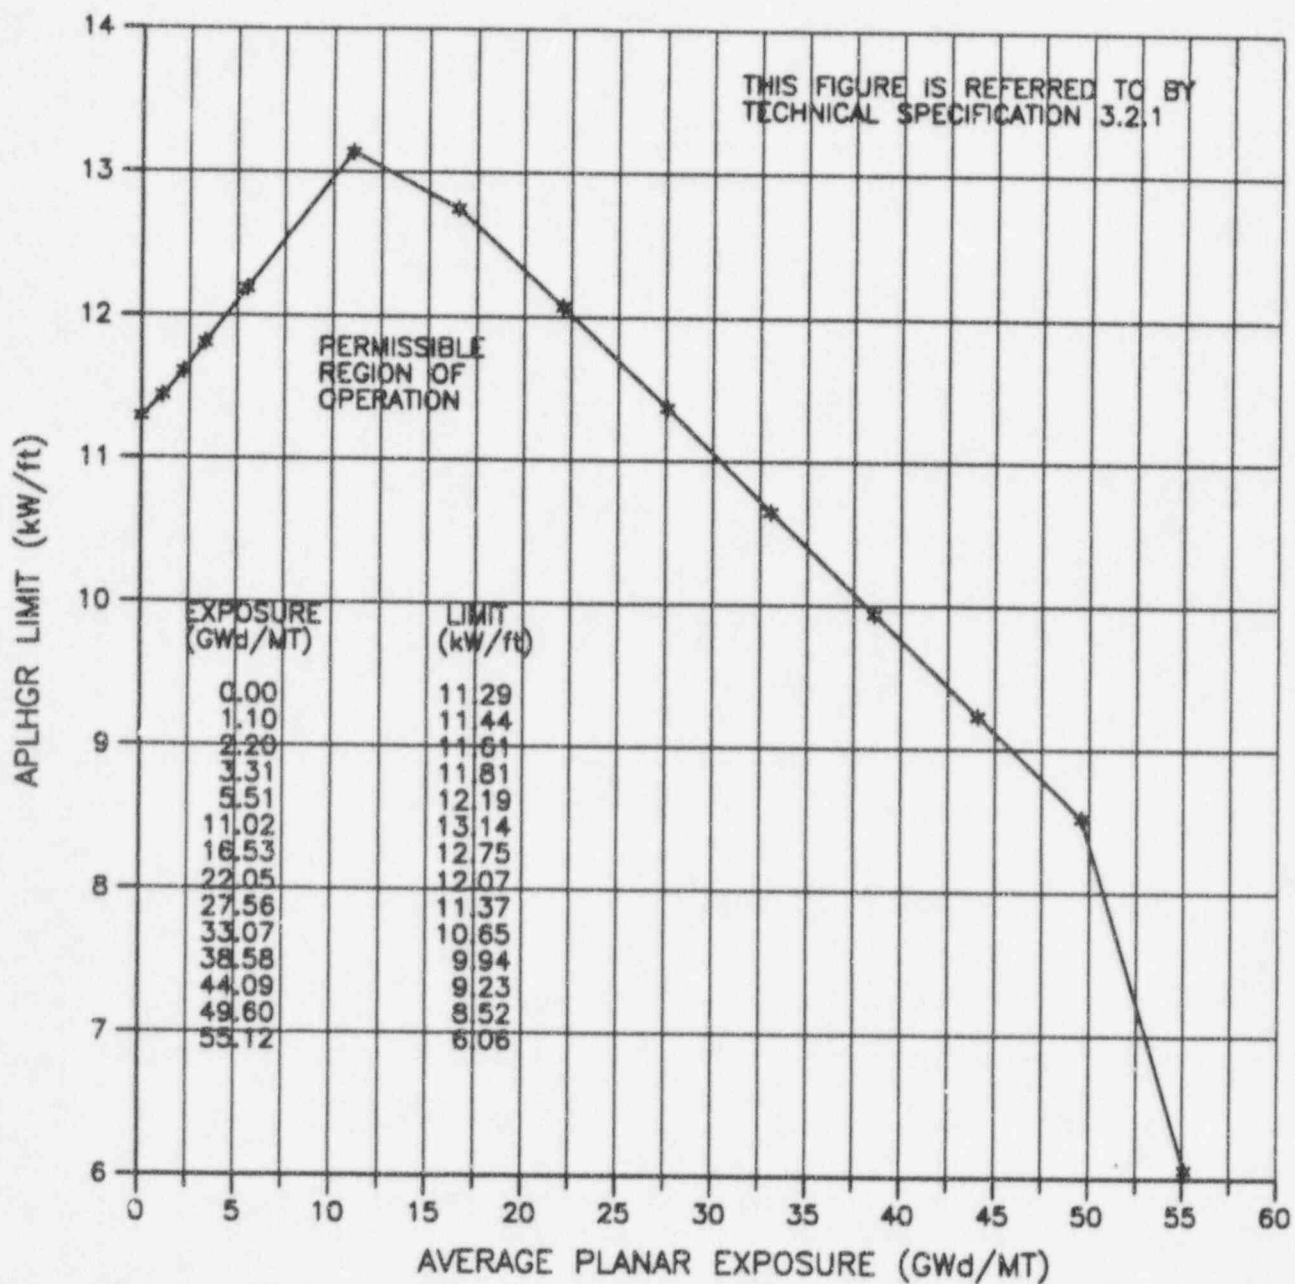


Figure 2

FUEL TYPE BD339A (GE8X8EB)
AVERAGE PLANAR LINEAR HEAT
GENERATION RATE (APLHGR) LIMIT
VERSUS AVERAGE PLANAR EXPOSURE

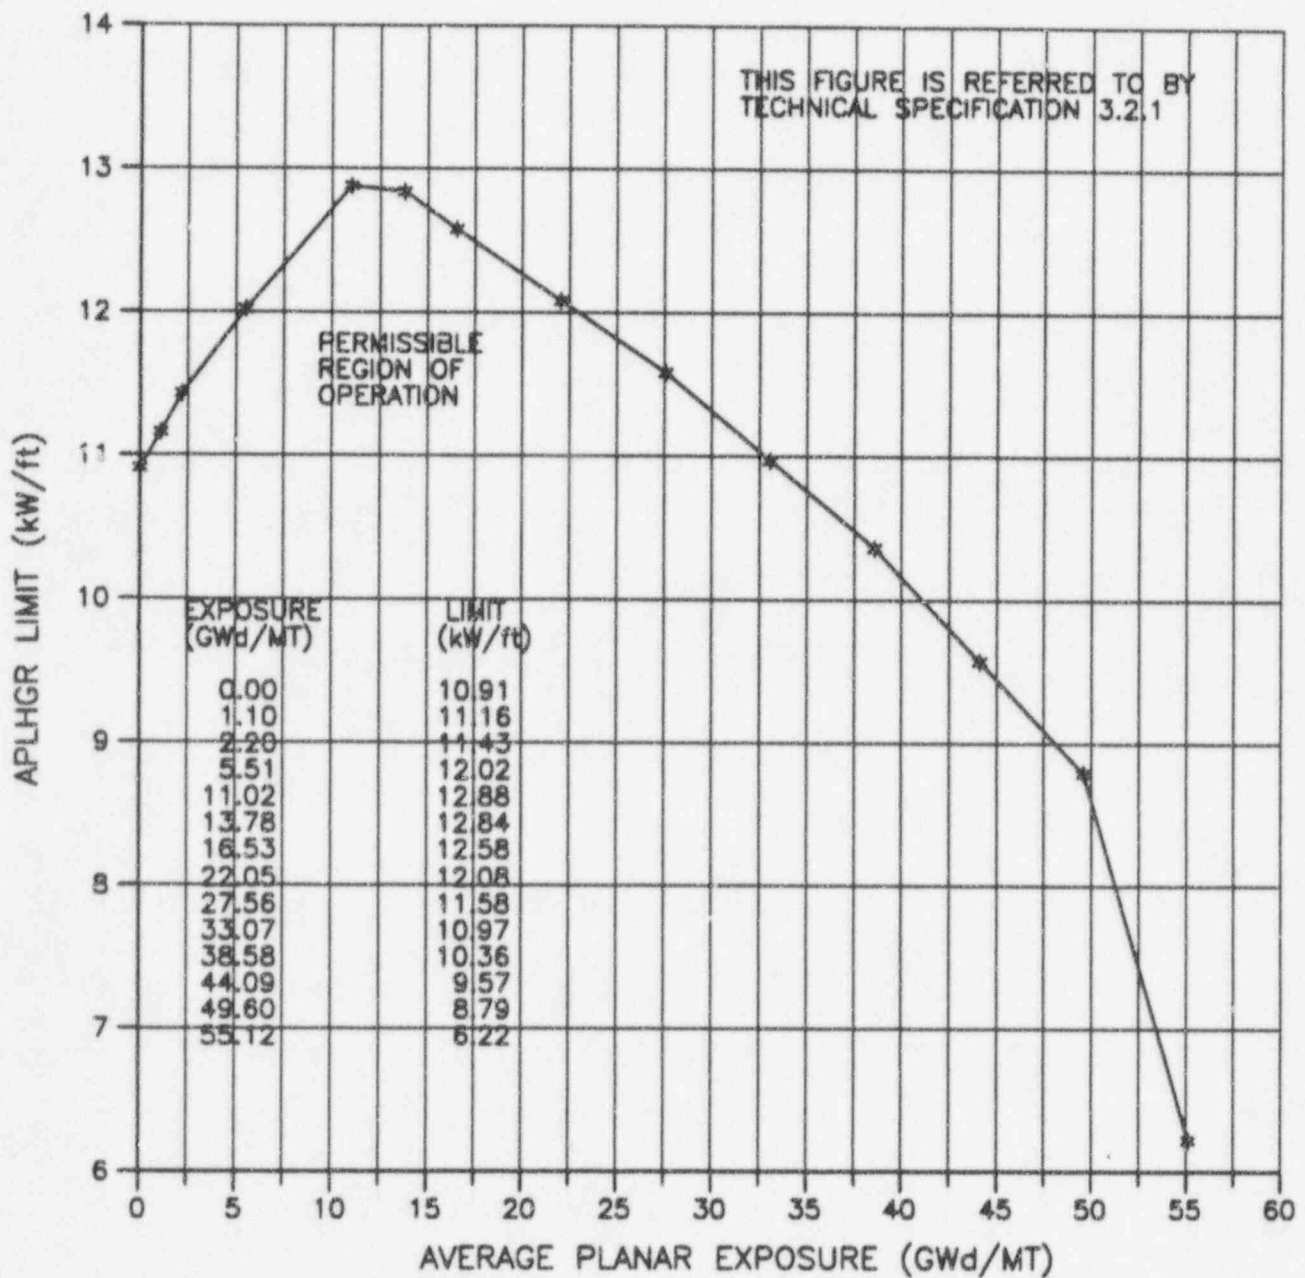


Figure 3

FUEL TYPE GE10-P8HXB322-11GZ-70M-150-T (GE8X8NB-3)
AVERAGE PLANAR LINEAR HEAT
GENERATION RATE (APLHGR) LIMIT
VERSUS AVERAGE PLANAR EXPOSURE

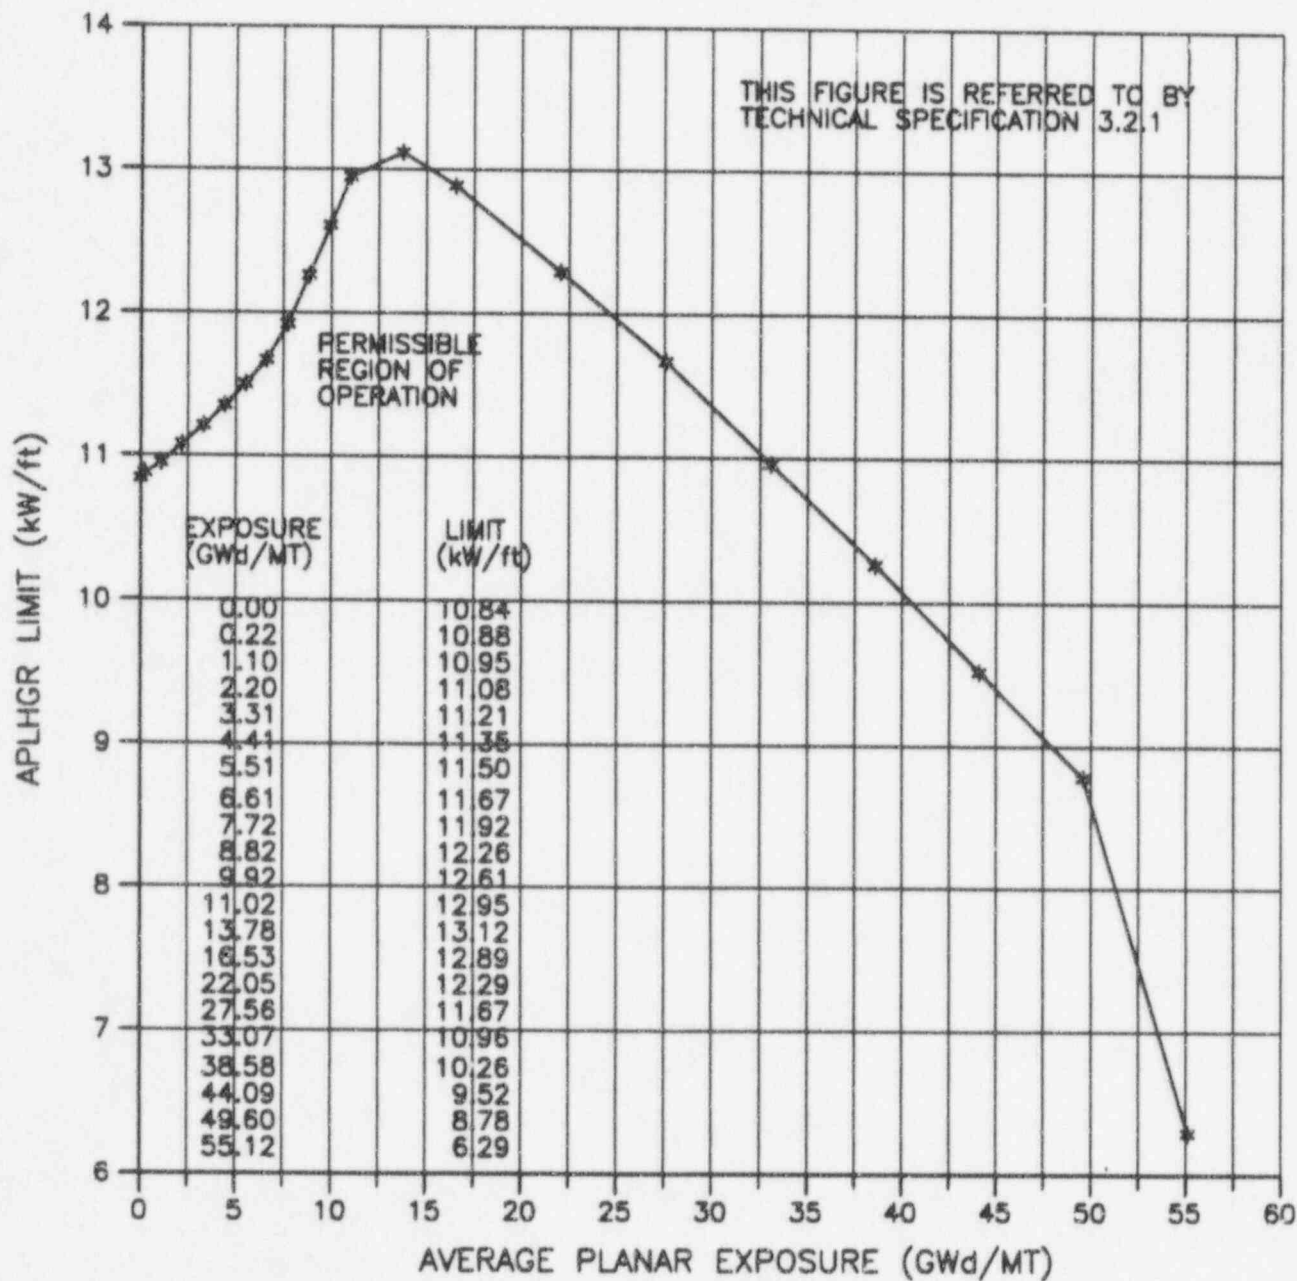


Figure 4

FUEL TYPE GE10-P8HXB324-12GZ-70M-150-T (GE8X8NB-3)
 AVERAGE PLANAR LINEAR HEAT
 GENERATION RATE (APLHGR) LIMIT
 VERSUS AVERAGE PLANAR EXPOSURE

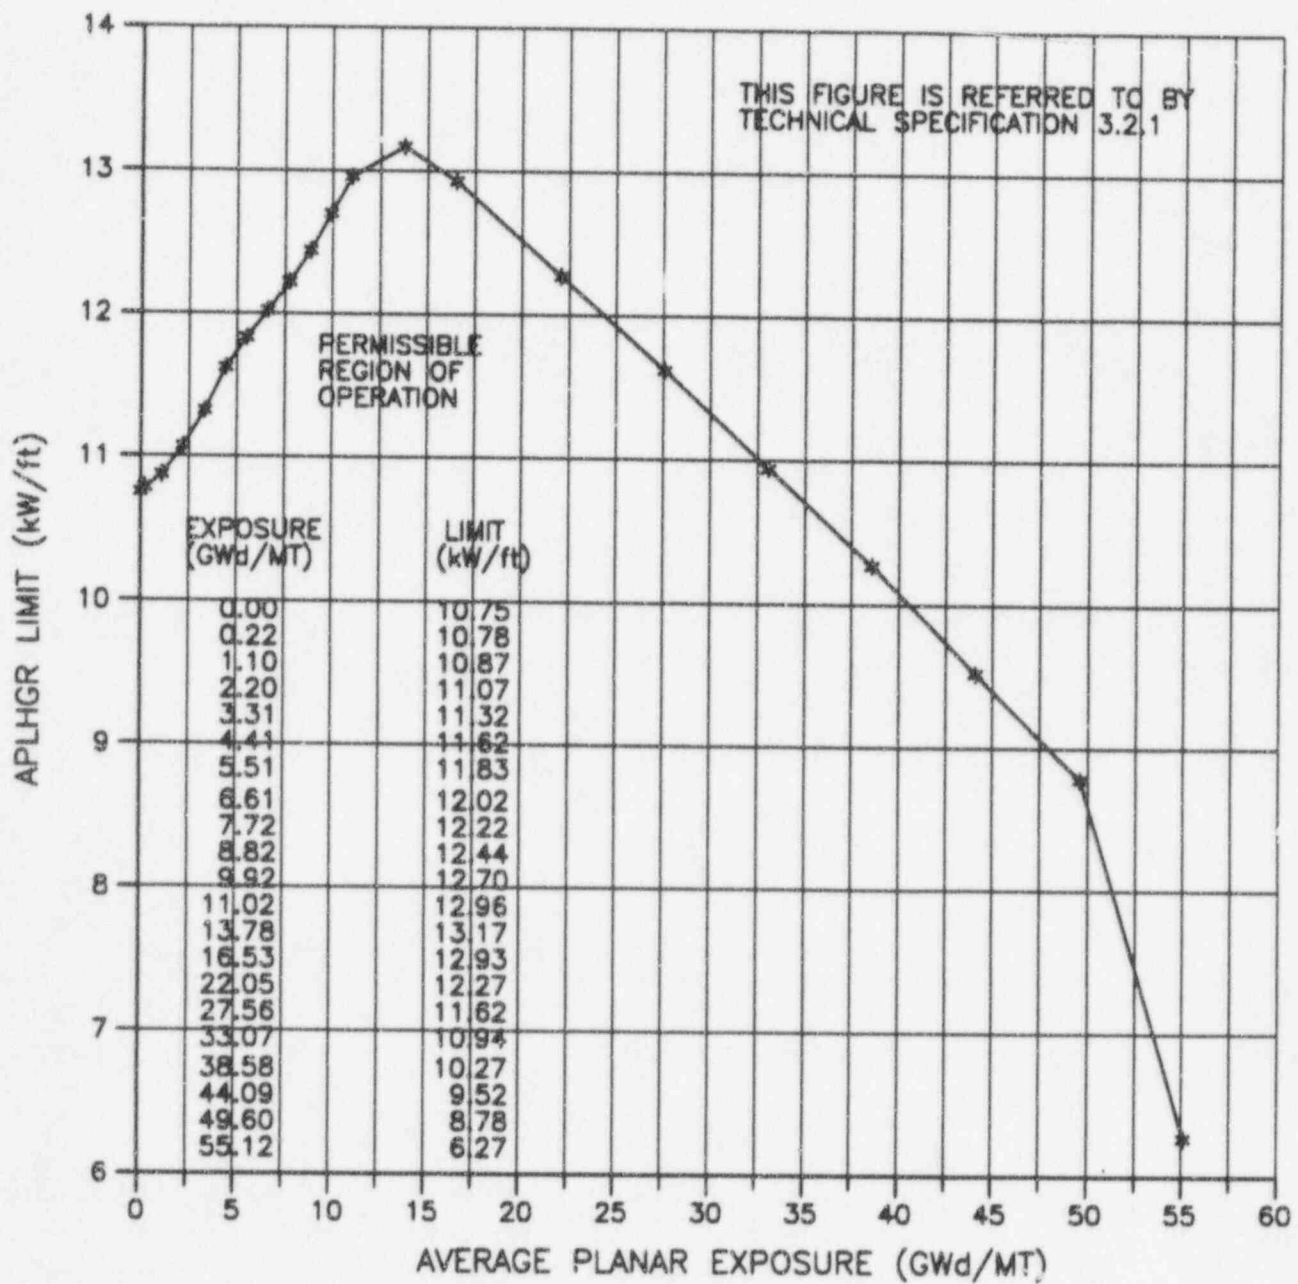


Figure 5

FUEL TYPE GE10-P8HXB320-11GZ-100M-150-T (GE8X8NB-3)
AVERAGE PLANAR LINEAR HEAT
GENERATION RATE (APLHGR) LIMIT
VERSUS AVERAGE PLANAR EXPOSURE

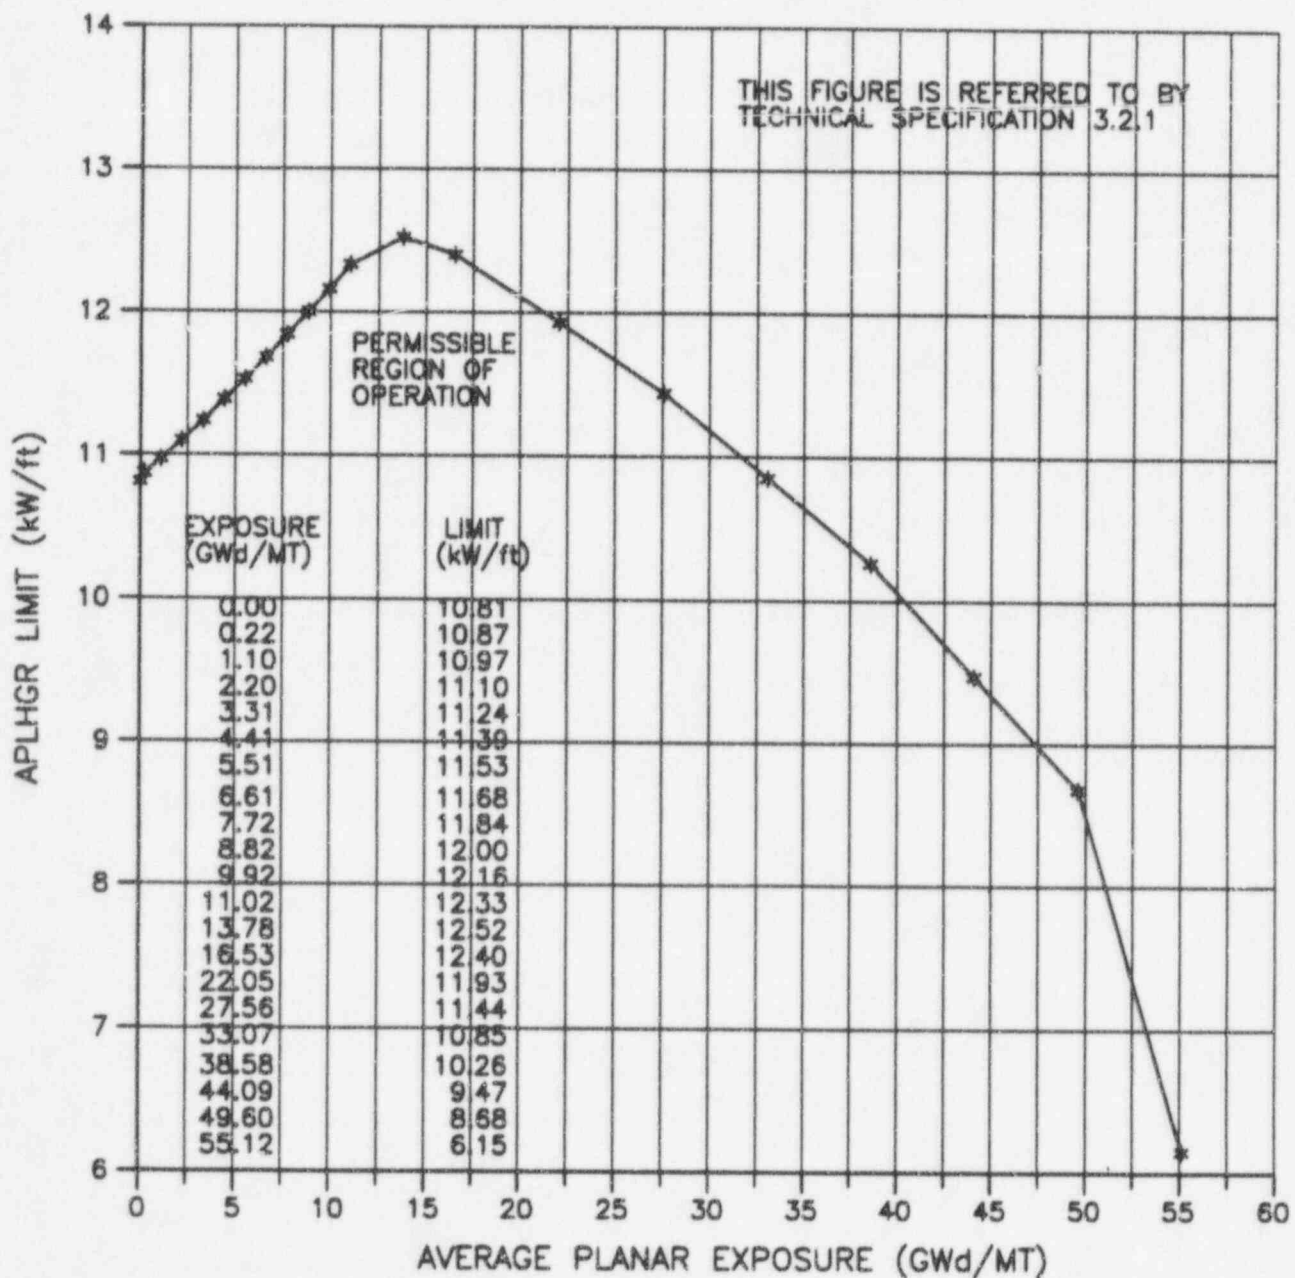


Figure 6

FUEL TYPE GE10-P8HXB346-12GZ-100M-150-T (GE8X8NG-3)
AVERAGE PLANAR LINEAR HEAT
GENERATION RATE (APLHGR) LIMIT
VERSUS AVERAGE PLANAR EXPOSURE

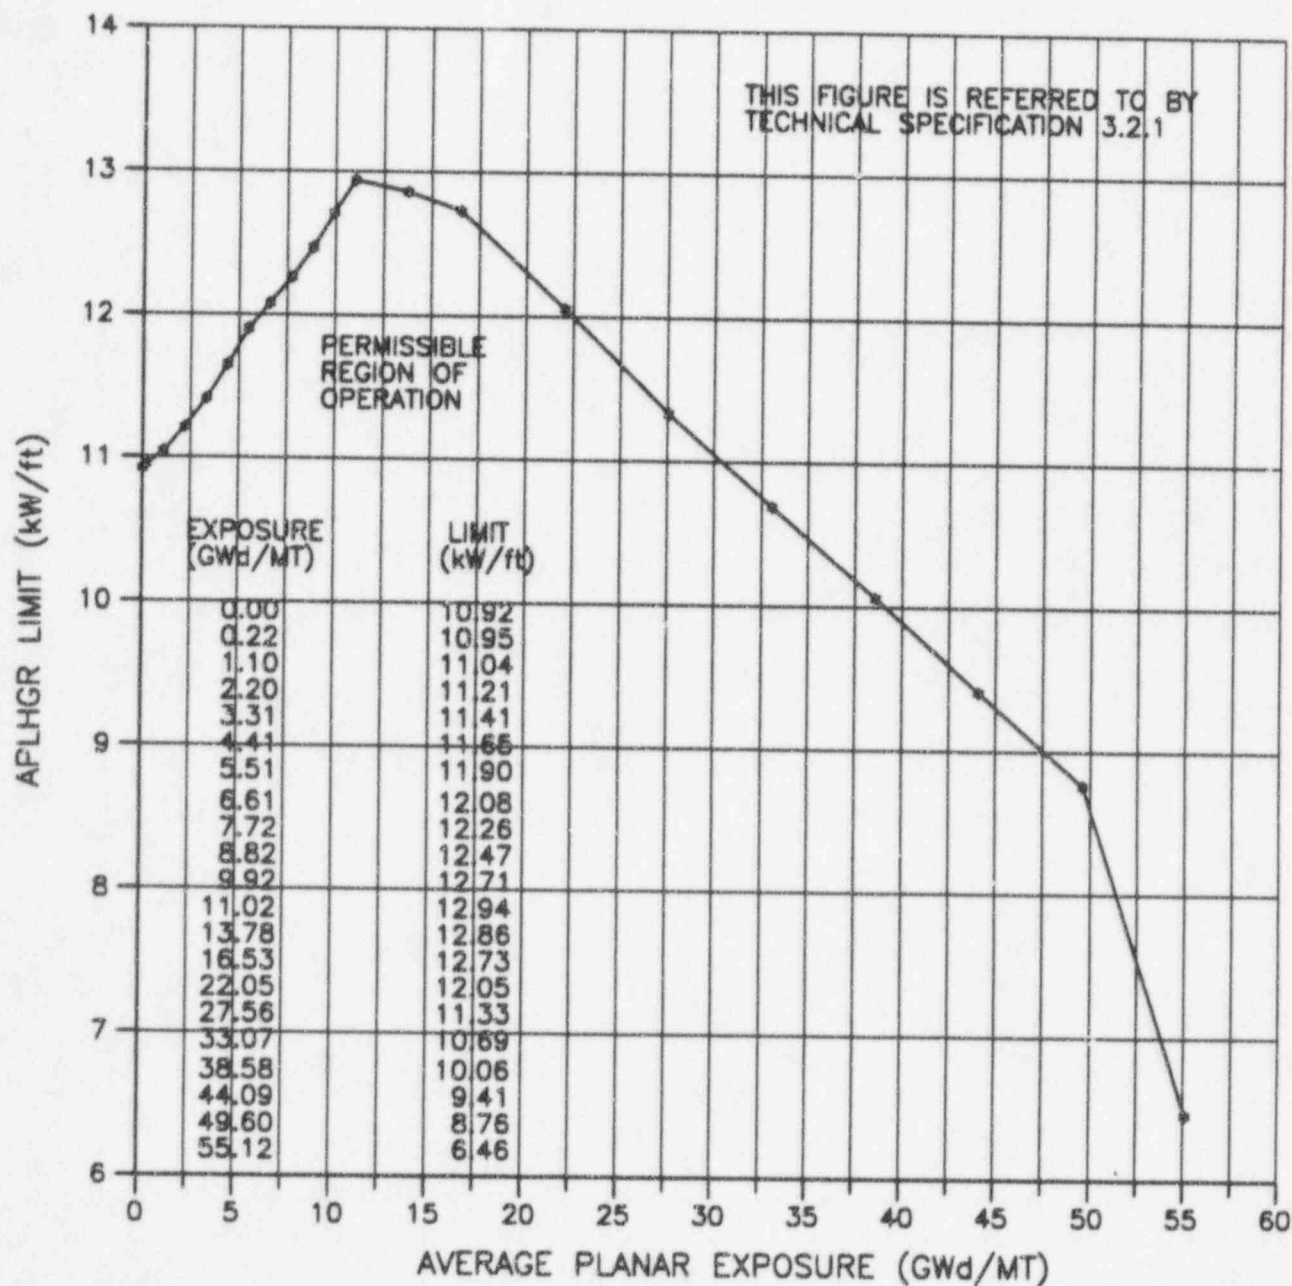


Figure 7

FUEL TYPE GE13-P9DTB380-11G5.0A-100T-146-T (GE13)
AVERAGE PLANAR LINEAR HEAT
GENERATION RATE (APLHGR) LIMIT
VERSUS AVERAGE PLANAR EXPOSURE

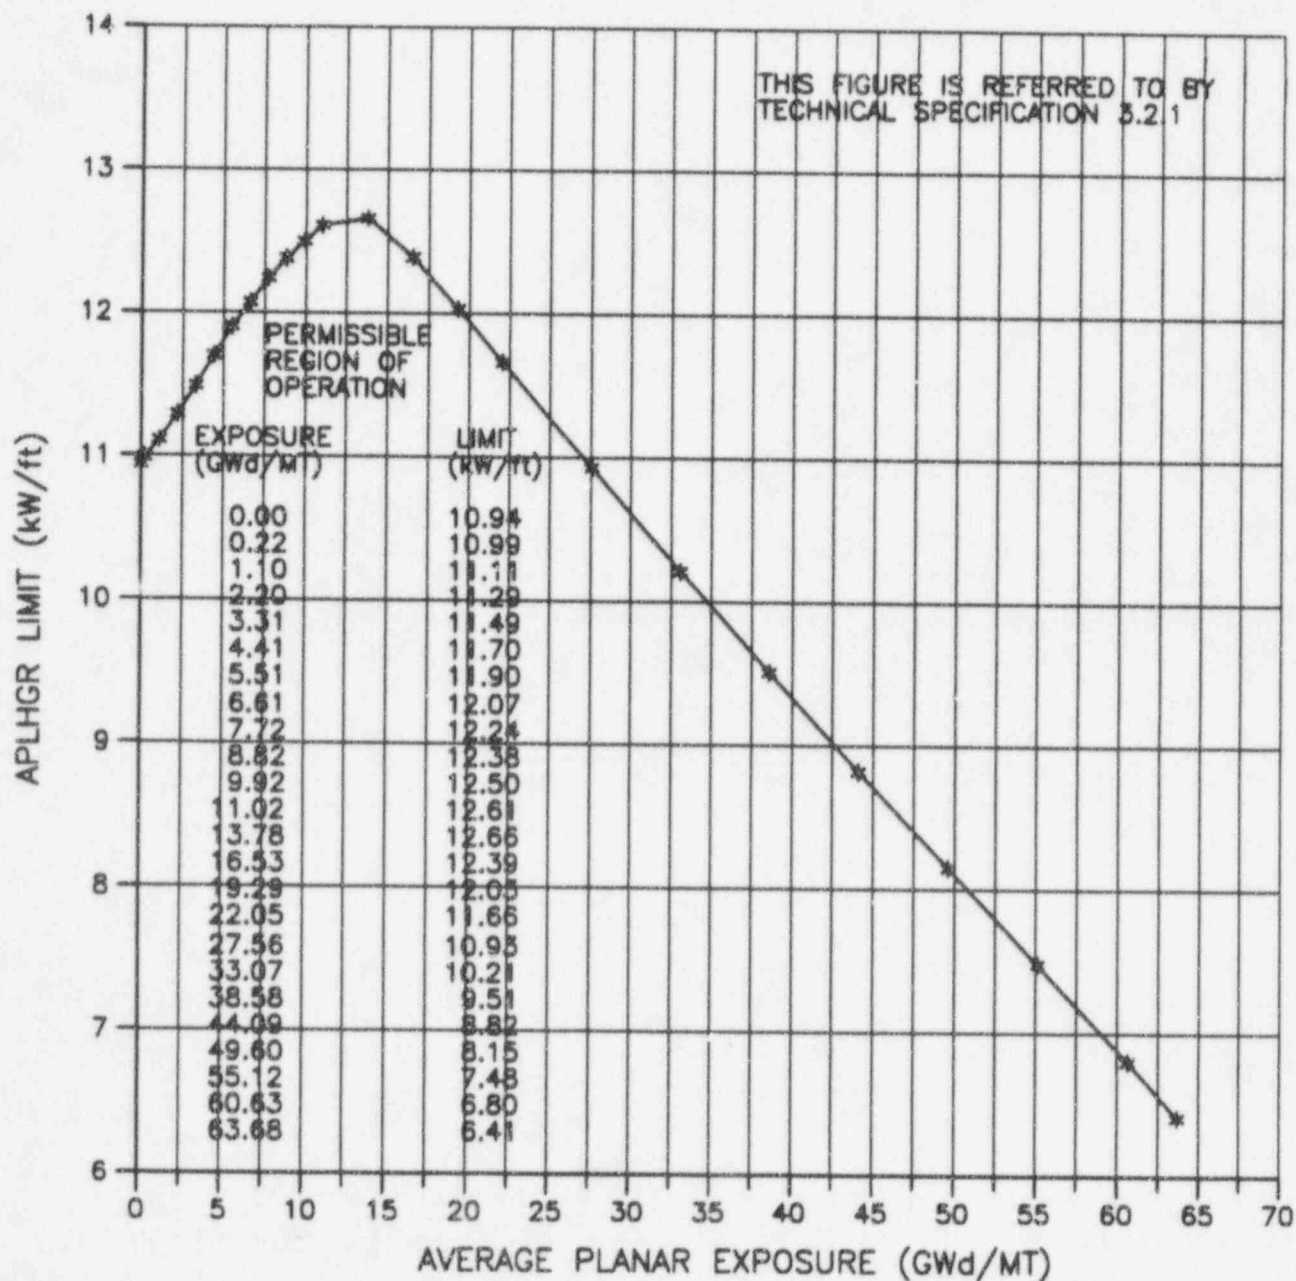


Figure 8

FUEL TYPE GE13-P9DTB380-10G5.0A-100T-146T (GE13)
AVERAGE PLANAR LINEAR HEAT
GENERATION RATE (APLHGR) LIMIT
VERSUS AVERAGE PLANAR EXPOSURE


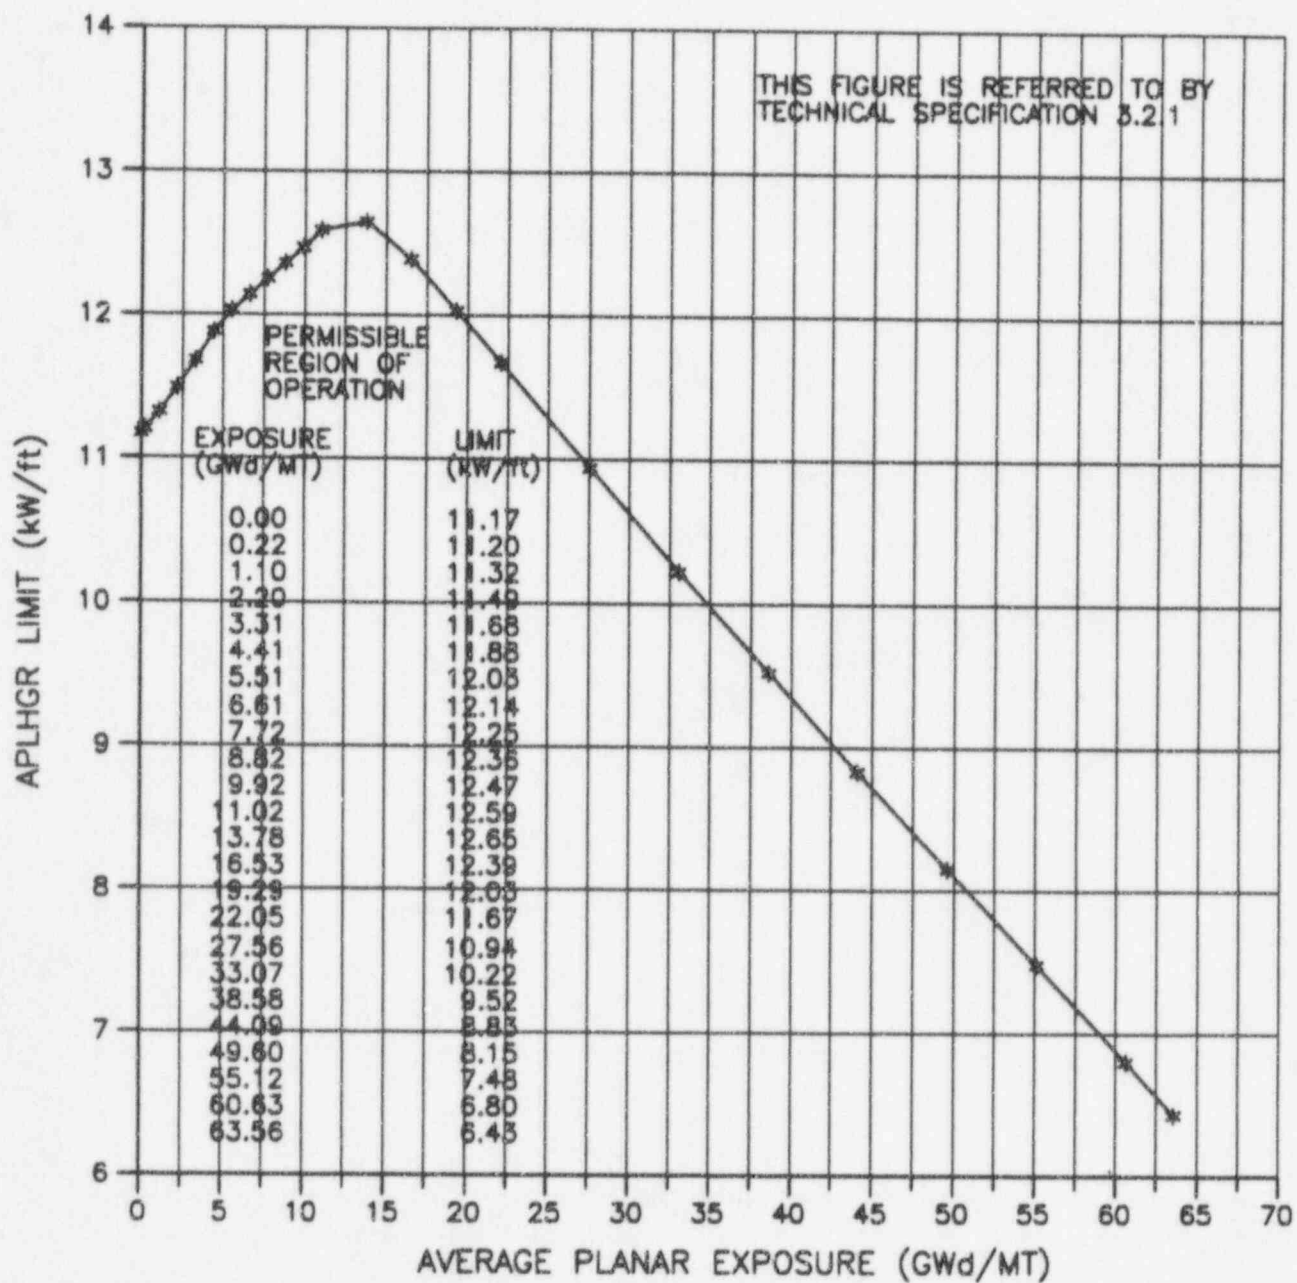


Figure 9


Flow - Dependent MAPLHGR Limit, MAPLHGR (F)

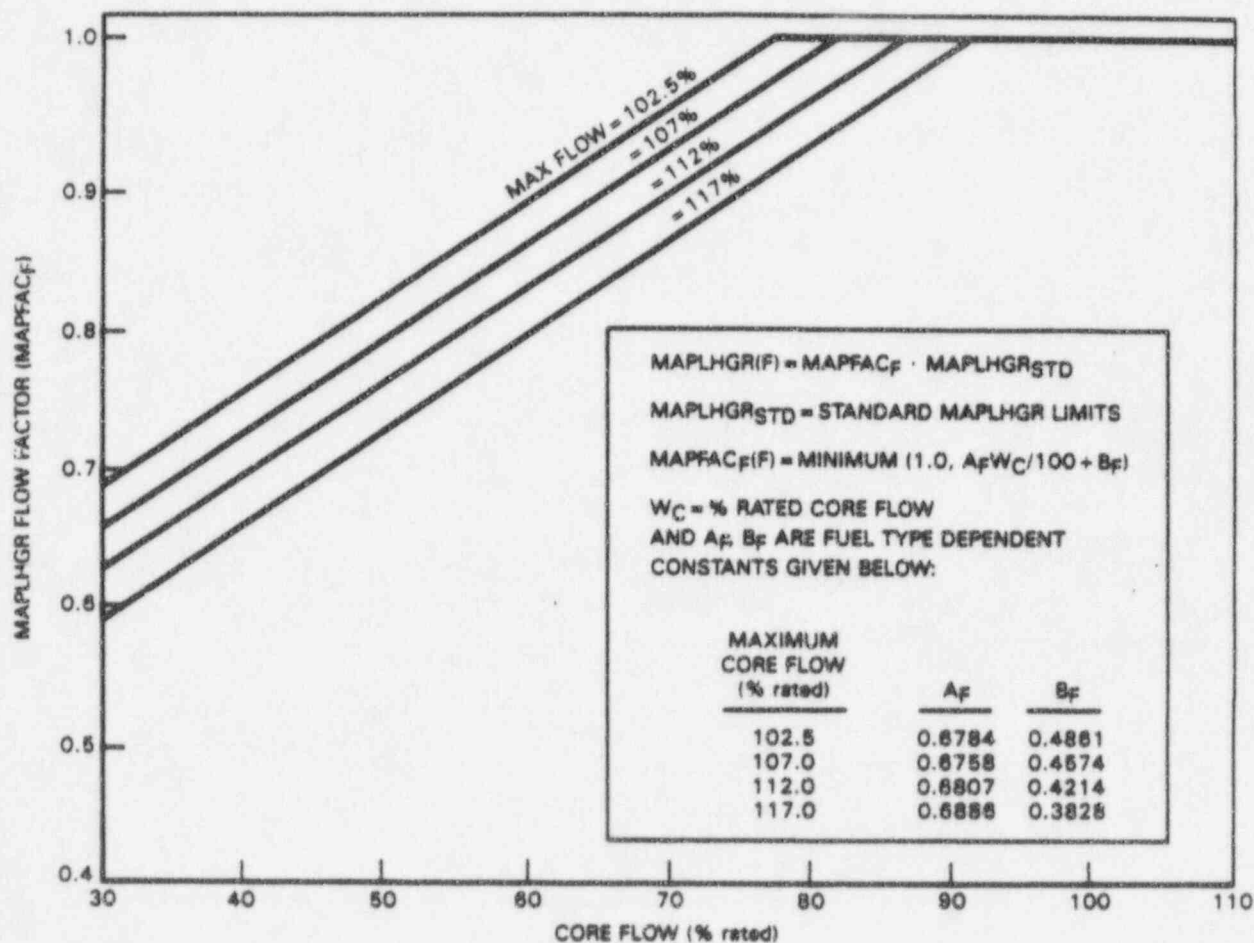

This figure is referred to by
Technical Specification 3.2.1

Figure 10

Power - Dependent MAPLHGR Limit, MAPLHGR (P)

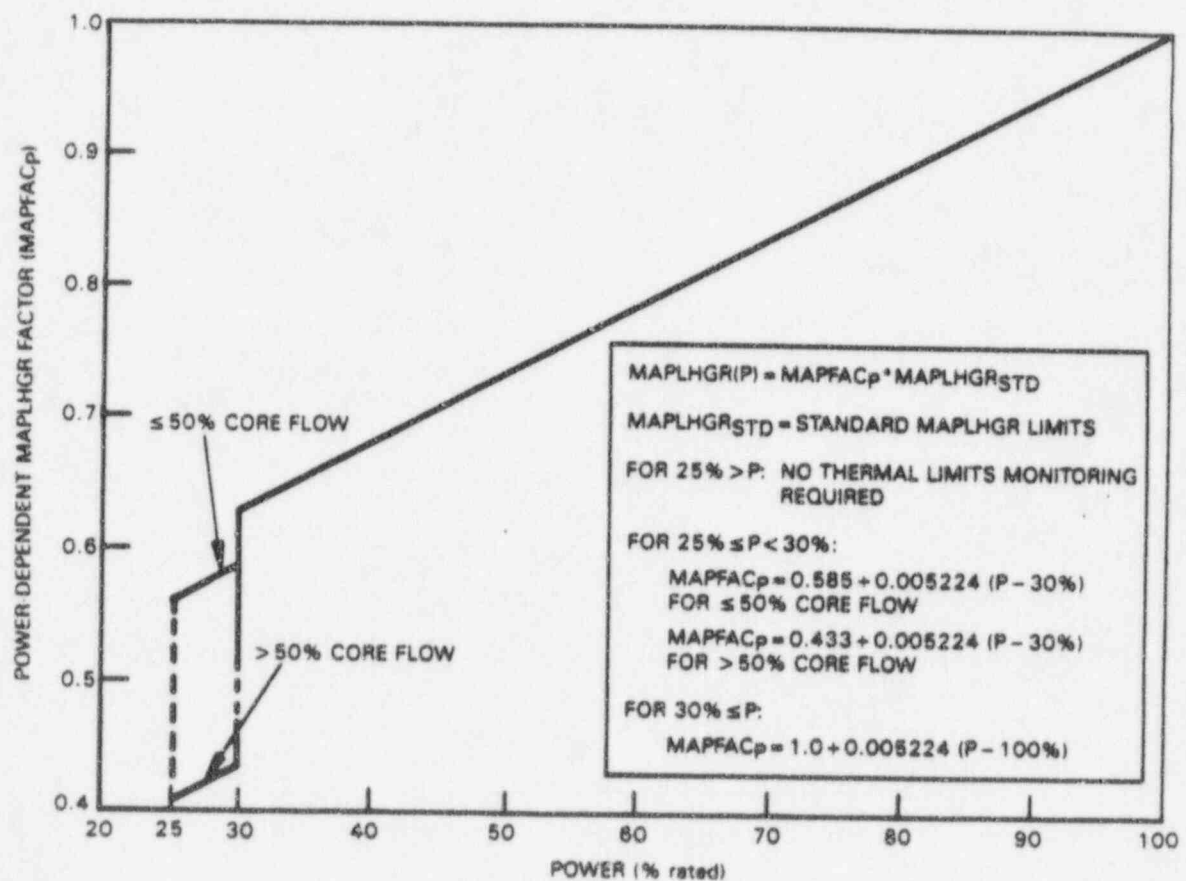

This figure is referred to by
Technical Specification 3.2.1

Table 1
MCPR Limits

Non-pressurization Transient MCPR Limits

Fuel Type	MCPR Limit	Exposure Range
GE8x8NB-3/GE8x8EB	1.29	BOC11-EOC11
GE13	1.29	BOC11-EOC11

Pressurization Transient MCPR Limits

MCPR Option A

Fuel Type	MCPR Limit	Exposure Range
GE8x8NB-3/GE8x8EB	1.35	BOC11 to EOC11-2205 MWd/MT
GE13	1.42	BOC11 to EOC11-2205 MWd/MT
GE8x8NB-3/GE8x8EB	1.35	EOC11-2205 MWd/MT to EOC11
GE13	1.48	EOC11-2205 MWd/MT to EOC11


MCPR Option B

Fuel Type	MCPR Limit	Exposure Range
GE8x8NB-3/GE8x8EB	1.28	BOC11 to EOC11-2205 MWd/MT
GE13	1.37	BOC11 to EOC11-2205 MWd/MT
GE8x8NB-3/GE8x8EB	1.31	ECC11-2205 MWd/MT to EOC11
GE13	1.40	EOC11-2205 MWd/MT to EOC11

This table is referred to by
Technical Specifications 3.2.2.1 and 3.2.2.2

Figure 11


Flow - Dependent MCPR Limit, MCPR (F)

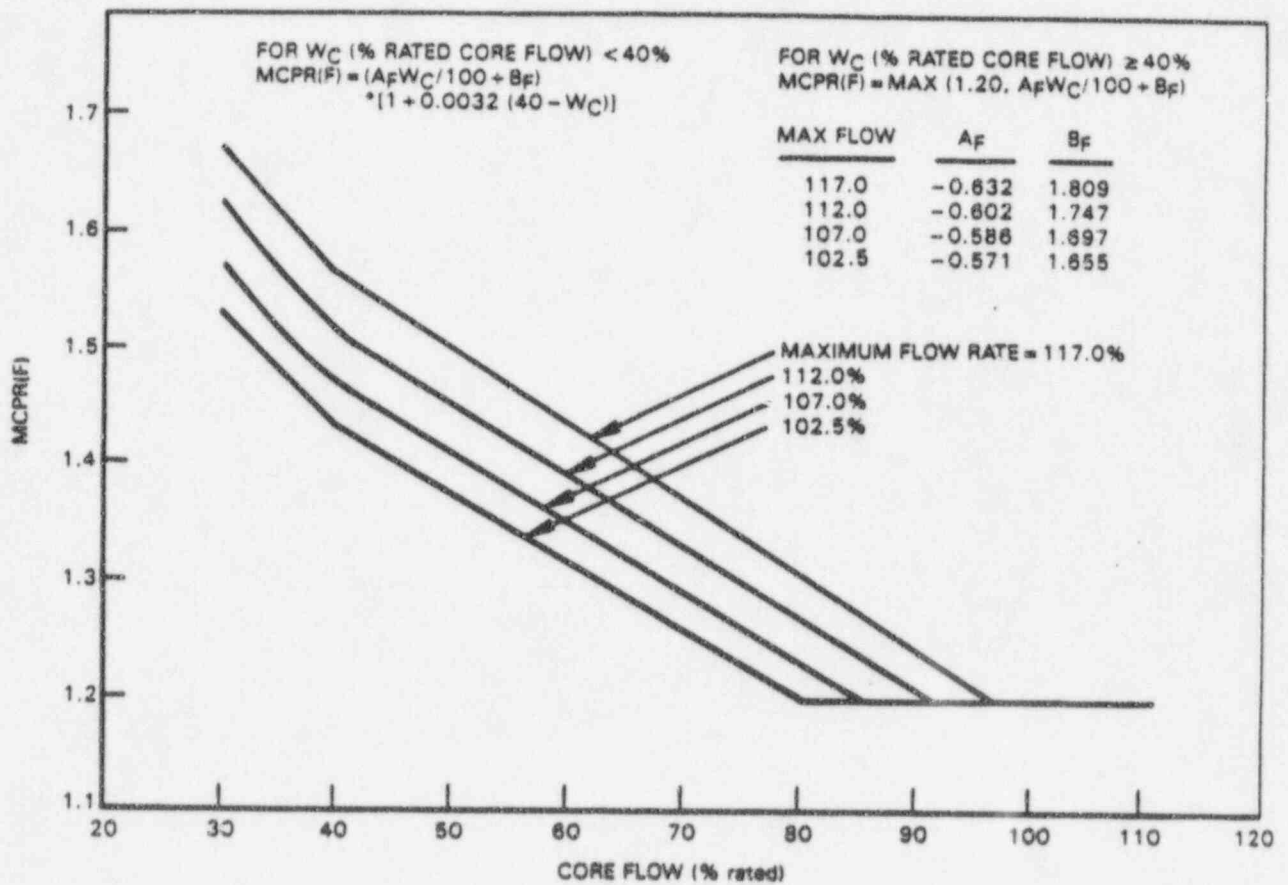

This figure is referred to by
Technical Specification 3.2.2.1

Figure 12

Power - Dependent MCPR Limit, MCPR (P)

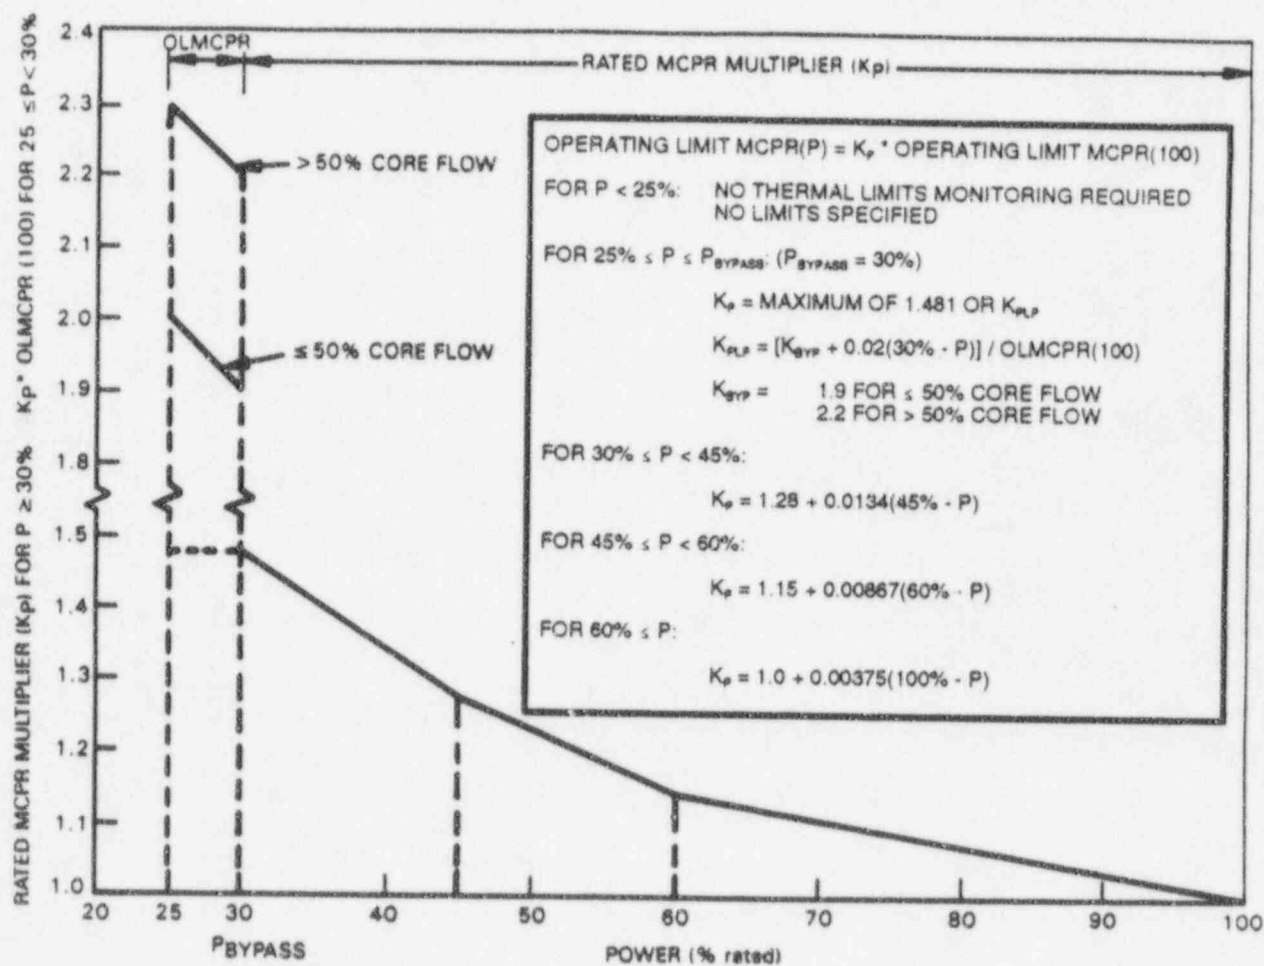

This figure is referred to by
Technical Specification 3.2.2.1

Table 2

RBM System Setpoints

<u>Setpoint</u>	<u>Trip Setpoint</u>	<u>Allowable Value</u>
Lower Power Setpoint (LPSP ^a)	27.0	≤ 29.0
Intermediate Power Setpoint (IPSP ^a)	62.0	≤ 64.0
High Power Setpoint (HPSP ^a)	82.0	≤ 84.0
Low Trip Setpoint (LTSP ^b)	≤ 115.1	≤ 115.5
Intermediate Trip Setpoint (ITSP ^b)	≤ 109.3	≤ 109.7
High Trip Setpoint (HTSP ^b)	≤ 105.5	≤ 105.9
t _{d2}	≤ 2.0 seconds	≤ 2.0 seconds

^a Setpoints in percent of Rated Thermal Power.

^b Setpoints relative to a full scale reading of 125. For example, ≤ 115.1 means ≤ 115.1/125.0 of full scale.

This table is referred to by
Technical Specification 3.3.4 (Table 3.3.4-2)

ENCLOSURE 2

BRUNSWICK STEAM ELECTRIC PLANT, UNIT NO. 1
DOCKET NO. 50-325
LICENSE NO. DPR-71
TRANSMITTAL OF CORE OPERATING LIMITS REPORT,
SUPPLEMENTAL RELOAD LICENSING REPORT, AND
LOSS-OF-COOLANT-ACCIDENT ANALYSIS REPORT

SUPPLEMENTAL RELOAD LICENSING REPORT
FOR
BRUNSWICK STEAM ELECTRIC PLANT UNIT 1
RELOAD 10, CYCLE 11

24A5376, REVISION 0