

**U.S. NRC**

UNITED STATES NUCLEAR REGULATORY COMMISSION

*Protecting People and the Environment*

**Generic Failure Rate Evaluation for Jocassee Dam**

**March 15, 2010**

Probabilistic Risk Assessment (PRA) Analyst:

James Vail, Reliability and Risk Analyst,  
NRR/DRA/APOB

Probabilistic Risk Assessment (PRA) Analyst:

Fernando Ferrante, Reliability and Risk  
Analyst, NRR/DRA/APOB

Probabilistic Risk Assessment (PRA) Analyst:

Jeff Mitman, Senior Reliability and Risk  
Analyst, NRR/DRA/APOB

Peer Reviewer:

Steven A. Laur, Senior Technical Advisor  
NRR/DRA

Information in this record was deleted in  
accordance with the Freedom of Information Act  
Exemptions 7E  
FOIA/PA 2013-0008

## **GENERIC FAILURE RATE EVALUATION FOR JOCASSEE DAM BY DIVISION OF RISK ASSESSMENT'S PRA OPERATIONAL SUPPORT BRANCH**

The following documents a generic dam failure rate analysis applicable to the Jocassee Dam performed by the PRA Operational Support Branch (APOB) of the Division of Risk Assessment (DRA) in the Office of Nuclear Reactor Regulation (NRR). The analysis, technical justifications, and databases used in support of the calculations for the derived value are briefly discussed. Portions of this evaluation were initially performed in 2007 but not formally documented at that time.

### **Approach**

The approach used in deriving a generic failure rate value applicable to the Jocassee Dam included: (i) an evaluation of the physical characteristics and description of the dam, (ii) an assessment of the overall U.S. dam population for those with similar features to the Jocassee Dam, (iii) a study of U.S. dam performance information for failure events that may be applicable to this subset of the overall population, and (iv) a calculation of a point estimate, as well as consideration of the uncertainty involved, for the failure rate given the observed failure events and the observed time period (in dam-years).

### **Jocassee Dam Description**

The Jocassee Dam is located in northwest South Carolina, forming a reservoir (Lake Jocassee) with a 7565-acre surface area, a water volume of 1,160,298 acre-feet, and a total drainage area of 147 sq-miles at full pond (1,110 feet elevation above mean sea level). The reservoir was created in 1973 with the construction of the dam. The Jocassee Dam is an embankment dam with an earthen core and rockfilled and random rockfilled zones (see Figure 1).

(b)(7)(F)

The dam is 385 feet in height (1,125 crest elevation above mean sea level) and 1,825 feet in length and, along with two homogeneous earthfill dikes and a reinforced concrete spillway, is part of a hydroelectric station and pumped storage project. The underground powerhouse generating units receive water from two cylindrical intake towers through eight openings. The water is channeled from the intake towers to four hydro turbines by two bifurcated power tunnels which are constructed through the bedrock of the east abutment. Two gates 33 feet in height and 38 feet in width control the outflow of the spillway.

### **Databases**

The staff used two databases to obtain information about the population of dams in the US: the National Inventory of Dams (NID), maintained by the US Army Corps of Engineers, and the National Performance of Dams Program (NPDP), developed by the Department of Civil and Environmental Engineering at Stanford University. The NID database contains data describing multiple attributes such as dimensions, type, impoundment characteristics, etc. The NPDP database contains a collection of dam incident reports searchable by various parameters including dam type, incident type, and consequences.

### **Failure Events**

Table 1 lists the applicable dam failures initially derived from the NPDP database. To choose these 13 failures, the analysts used criteria based on the previously discussed dam characteristics (i.e., dam type and height). However, due to the ambiguity in the classification of the dam type (i.e., based on material composition) between and within the NID and NPDP databases, as well as the lack of information to establish an exact link with the Jocassee Dam characteristics for every data point, the staff considered both rockfill dams and mixed-rockfill dams (i.e., those classified exclusively as rockfill dams as well as mixed dam types that include rockfill in their categorization). It should be noted that the NPDP database does not list any failures post-2006 and at least two well-known large dam failures in the U.S. are not included: the Big Bay Dam in Mississippi (March 2004) and the Taum Sauk Reservoir (December 2005) in Missouri. While the Big Bay Dam was an earthen dam (i.e., excluded based on dam type), the Taum Sauk Reservoir consisted of a concrete-faced rockfill dam approximately 100 feet in height and was, therefore, included in the current analysis.

Additionally, the list was screened to take into consideration (i) failure events observed between 1900 and 2005, and (ii) failure events observed between 1940 and 2005; under the assumption that events prior to these construction periods could produce different results representative of distinct design practices. In part, this choice was due to the lack of information on the exact construction date of several dams in the database. The staff expended an extensive effort to determine the construction completion date for several dams for which the information was missing in the NPDP database (this information is included in Table 1).

Several failures listed in Table 1 have (or are assumed to have) occurred within a few years of either the start or completion of construction (e.g., the Lower Hell Hole Dam and the Frenchman Dam failures). Based on the information available and the estimated completion dates, the staff screened out such failures since the occurrence of the events was assumed to be related to the construction phase and, therefore, not applicable to a mature dam such as Jocassee.

Finally, the analysts chose to include the Dresser No. 4 Dam failure, because they deemed this dam to be similar to the Jocassee Dam in composition (i.e., a large mixed earthfill-rockfill dam),

despite the fact that it is listed as a tailings dam (i.e., a dam theoretically built under lower standards of quality and maintenance).

Therefore, the final list of failures of dams similar to, and therefore applicable to, the Jocassee Dam includes 6 failures occurring between 1900 and 2005. These six failures are highlighted in Table 1. The staff included these failures based on the following criteria: (i) rockfill or mixed-rockfill dam type, (ii) dam height above 50 feet, (iii) failure occurring after 1900, and (iv) no failures during or within a few years of completion of construction. Note that if failures occurring prior to 1940 are screened, then only 4 events remain: (1) Taum Sauk, (2) Dresser No.4 Dam, (3) Skagway, and (4) Kern Brothers Reservoir. It should be noted that there are 1 to 3 failures of dams built between 1940 and 2005 depending on whether the entries with unknown construction dates are excluded or not, respectively (in similar fashion, there are 3 to 5 failures for dams constructed between 1900-2005 excluding or not entries with unknown construction dates, respectively).

#### **Total Dam-years Calculation**

To calculate the dam failure rate, the staff needed to obtain the total number of dam-years of both failed and non-failed dams. The analysts extracted a subset of dams from the NID database based on a set of parameters to narrow the US population of dams to those reflecting the characteristics of the Jocassee Dam discussed above, i.e., large rockfill dams. They assumed that dams above 50 feet in height appropriately reflect design practices and structural characteristics of larger dams such as Jocassee. This height criterion was consistent with the large dam definition (WCD, 2000) established by the International Commission on Large Dams (ICOLD) which "defines a large dam as a dam with a height of 15m or more from the foundation." If dams are between 5-15 meters high and have a reservoir volume of more than 3 million cubic meters, ICOLD also classified such dams as large. Hence, the staff used this definition as a screening criterion. The dams considered for calculation of the total dam-years were those in the NID database that were categorized exclusively as 'Rockfill' dams (i.e., those listed under the 'ER' abbreviation, intended to correspond to rockfill dams for NID cataloguing purposes).

The staff included the dam-year contributions from Skagway and the replacement for the failed Frenchman Dam, while those from Kern Brothers Reservoir, Dresser No. 4 Dam, Penn Forest, and the failed Frenchman Dam were not included. This was because the staff judges that including the dam-year contribution from these specific dams would not significantly impact the resulting dam-year total. The staff calculated the final result using the difference between the last year in the available data (2005) and either 1900 or 1940. For the 1900-2005 period, the staff obtained a total of 21,490 dam-years; while for 1940-2005 the result was 13,889 dam-years. See Appendix A for a tabulation of the dams and the associated dam-years.

**Table 1: Initial List of dam failure events applicable to the Jocassee Dam**

Dam Name	Incident Year	Completion Year (Est.)	Incident Type	Dam Type	Height (ft)	Description From NPD Database (Except Taum Sauk)
Taum Sauk	2005	1963	Overtopping	Rockfill	94	Overtopped due to over-pumping of reservoir. Independent analysis indicated several root causes (e.g., lack of monitoring, spillway).
Dresser No.4 Dam	1975	Unknown	Piping	Earth Rockfill /Tailings	105	Catastrophic failure that created a breach 300 feet wide in the levee.
Skagway	1965	1925	Inflow Flood - Hydrologic Event	Rockfill	79	The dam failed during a flood in 1965.
Hell Hole	1964	1964	Not Known	Rockfill	410	Dam failed during construction. Overtopped by 100 feet - washing out most of the fill.
Penn Forest	1960	1960	Piping	Concrete Earth Rockfill	151	Partial failure. Sinkhole occurred in upstream slope of dam.
Frenchman Dam	1952	1951	Inflow Flood - Hydrologic Event	Rockfill	63	Runoff from melting snow. A dike section was overtopped early morning April 15, 1952. Later that day, dam breached.
Kern Brothers Reservoir	1949	Unknown	Settlement	Earth Rockfill	54	Failure due to excessive settlement of fill.
Lake Francis	1899	1899	Piping	Earth Rockfill	79	Blowout failure under concrete spillway weir structure during period of heavy spillway flow. Spillway failure thought to be due to piping in soft saturated foundation.
Lafayette	1928	1928	Embankment Slide	Earth Rockfill	132	Foundation slide during construction (at 120 feet). Height raised to 170 feet in 1932. Not sure if this is considered a failure.
Manitou	1924	1917	Seepage	Earth Rockfill	123	Partial failure was disintegrating and converted into gravel fill.
Lyman	1915	1912	Piping	Earth Rockfill	76.4	Failure by piping through abutment; undermined by passage of water under cap of lava rock which flanked dam and extended beneath spillway. Main part of dam uninjured.
Lower Otay	1916	1897	Spillway	Earth Rockfill	154	Foundation slide during construction (at 120 feet). Height raised to 170 feet in 1932. Not sure if this is considered a failure.
Black Rock	1909	1908	Piping	Earth Rockfill	70	Failure by piping through abutment; undermined by passage of water under cap of lava rock which flanked dam and extended beneath spillway. Portion of spillway dropped 7 feet; some fill at south end washed out. Main part of dam uninjured.

### Generic Point Estimate of the Dam Failure Rate

The staff calculated the point estimate by dividing the number of applicable dam failures (see Table 1 above) by the total applicable dam-years (derived as described previously). Assuming a 1900-2005 range for the year of occurrence of the failure events and the dam-year estimation (based on completion year), the analysts obtained a failure rate of 2.8E-4 per dam-year. When considering a 1940-2005 range, the staff obtained a result of 2.9E-4 per dam-year.

Because the NID database does not give information regarding the quality of design, construction and/or maintenance, and the NPDP database does not consistently supply information on the dam health (i.e., is it well maintained?) at time of failure, the staff could not derive failure rates for above or below average built and maintained dams. This lack of information precluded the staff from making any judgment as to whether Jocassee is or is not an above average designed, constructed and maintained dam deserving of a failure frequency different than an average failure frequency.

Additionally, the staff recognizes that ambiguity and lack of complete information with respect to dam type, construction completion data, and dam incident reporting, may result in variations in the failure rate estimation. Therefore, the staff performed a simple sensitivity study in order to evaluate the changes due to screening failure events and cut-off year criteria. The results are shown in Table 2 for an assumed number of failures and clearly indicated that the results exhibit small variations for the period cut-off selected (1900-2005 and 1940-2005) and the number of failures considered (6 and 4, respectively). Additionally, the extent of the variation in the point estimate is shown for other number of failures and cut-off years based on the subset of dams selected. The table illustrates that the order-of-magnitude failure frequency estimate does not change significantly if the number of failures is increased or decreased slightly.

**Table 2: Failure Rate Sensitivity Analysis**

CUT-OFF	DAM-YEARS	# DAMS	ASSUMED NUMBER OF FAILURES						
			1	2	3	4	5	6	7
ALL	25137	484	4.0E-05	8.0E-05	1.2E-04	1.6E-04	2.0E-04	2.4E-04	2.8E-04
1900	21490	466	4.7E-05	9.3E-05	1.4E-04	1.9E-04	2.3E-04	2.8E-04	3.3E-04
1910	19778	449	5.1E-05	1.0E-04	1.5E-04	2.0E-04	2.5E-04	3.0E-04	3.5E-04
1920	18389	434	5.4E-05	1.1E-04	1.6E-04	2.2E-04	2.7E-04	3.3E-04	3.8E-04
1930	16475	410	6.1E-05	1.2E-04	1.8E-04	2.4E-04	3.0E-04	3.6E-04	4.2E-04
1940	13889	373	7.2E-05	1.4E-04	2.2E-04	2.9E-04	3.6E-04	4.3E-04	5.0E-04
1950	12269	346	8.2E-05	1.6E-04	2.4E-04	3.3E-04	4.1E-04	4.9E-04	5.7E-04
1960	8453	270	1.2E-04	2.4E-04	3.5E-04	4.7E-04	5.9E-04	7.1E-04	8.3E-04
1970	3242	143	3.1E-04	6.2E-04	9.3E-04	1.2E-03	1.5E-03	1.9E-03	2.2E-03
1980	1339	82	7.5E-04	1.5E-03	2.2E-03	3.0E-03	3.7E-03	4.5E-03	5.2E-03
1990	381	36	2.6E-03	5.2E-03	7.9E-03	1.0E-02	1.3E-02	1.6E-02	1.8E-02
FAILURE RATE GIVEN # NUMBER OF FAILURES AND CUTOFF YEAR									

## Bayesian Estimate of the Dam Failure Rate

To evaluate the dam failure rate uncertainty, the staff conducted a Bayesian analysis of the failure rate for the 1900-2005 period via a Bayesian analysis approach (Atwood et al, 2003). In this approach, a prior distribution was assumed from the number of failures and dam-years for all large dams (according to the ICOLD definition) identified in the NID and NPDP databases. Failures identified as 'infantile failures' in NPDP were excluded and only dams built since 1900 according to NID were used for total dam-year calculation. Under these assumptions, the total number of failures for all large dams for 1900-2005 was 84 with a total of 260,960 dam-years. This corresponds to a point estimate of the failure rate equivalent to  $3.2\text{E-}4/\text{dam-year}$ . A distribution was fitted around this mean. The number of dam failure events was modeled as a Poisson distribution for which its conjugate prior was assumed to follow a Gamma distribution (i.e., the conjugate prior in a Gamma-Poisson model). The staff, based on judgment, chose a Gamma distribution with the point estimate obtained from the large dam failure rate above and a 5<sup>th</sup> percentile corresponding to  $1\text{E-}5/\text{dam-year}$ . With these assumptions, the staff obtained a prior Gamma distribution with parameters  $\alpha = 0.8333$  and  $\beta = 2589$ , which has a 5<sup>th</sup> percentile equivalent to  $1\text{E-}5/\text{dam-year}$  and a 95<sup>th</sup> percentile corresponding to  $1\text{E-}3/\text{dam-year}$ . The staff updated this prior distribution with the data used to obtain the large rockfill dam point estimate (e.g., 6 failures in 21,490 dam-years) to calculate the posterior distribution. The resulting posterior has a mean of  $2.8\text{E-}4/\text{dam-year}$ , a 5<sup>th</sup> percentile of  $1.3\text{E-}4/\text{dam-years}$ , and a 95<sup>th</sup> percentile of  $4.8\text{E-}4/\text{dam-years}$  (with parameters  $\alpha = 6.8333$  and  $\beta = 24,079$ ). Figure 2 shows both the generic large dam prior and the posterior specific to rockfill dams.


## Conclusions

The staff estimated generic dam failure rates for large rockfill dams, which it considers applicable to the Jocassee Dam, as  $2.8\text{E-}4/\text{dam-year}$ . Given the nature of the data and the assumptions involved in narrowing the applicable failure events and subset of the U.S. dam population comparable to this specific dam, the staff performed a Bayesian analysis. Using available data on the domestic inventory of dams and dam failures, the range obtained varies between  $1.3\text{E-}4/\text{dam-year}$  and  $4.8\text{E-}4/\text{dam-year}$  (5<sup>th</sup> – 95<sup>th</sup> percentile) around a mean of  $2.8\text{E-}4/\text{dam-year}$ .

A literature review performed by the authors for statistical studies of dam failures appears to corroborate this conclusion. Such studies were found in Baecher et al (1980), Martz and Bryson (1982), Donnelly (1994), ICOLD (1995), Foster (2000a), and Foster et al (2000b).



**Figure 2: Failure Rate Probability Distributions Used in Bayesian Updating**

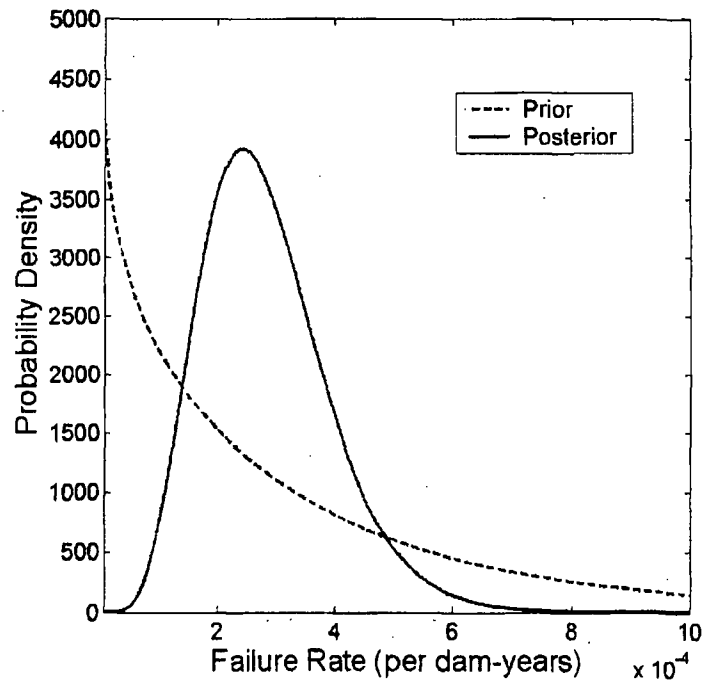

## References

- Baecher, G. B., M. E. Paté, and R. De Neufville (1980), "Risk of Dam Failure in Benefit-Cost Analysis," *Water Resource Research*, 16(3), 449-456.
- Martz, H.F., and M.C. Bryson (1982), "Predicting Low-Probability/High-Consequence Events," Proceedings of the Workshop on Low-Probability/High-Consequence Risk Analysis, June 15-17, 1982, Arlington, Virginia.
- Donnelly, R. (1994), "Issues in Dam Safety, ACRES International Innovations Autumn Edition": <http://www.hatch.com.cn/Hatchenergy/Innovations/autumn2004/feature.html>
- ICOLD (1995), "Dam Failures Statistical Analysis," Bulletin 99, International Commission on Large Dams.
- WCD (2000), "Dams and Development: A New Framework for Decision-Making - overview," The Report of the World Commission on Dams.
- Foster M, Fell R, Spannagle M (2000a), "The statistics of embankment dam failures and accidents," *Canadian Geotechnical Journal*, 37, 1000-1024.
- Foster M, Fell R, Spannagle M (2000b) "A method for assessing the relative likelihood of failure of embankment dams by piping," *Canadian Geotechnical Journal*, 37, 1025-1061



~~SENSITIVE INFORMATION - OFFICIAL USE ONLY~~

C.L. Atwood, J.L. LaChance, H.F. Martz, D.J. Anderson, M. Englehardt, D. Whitehead, and T. Wheeler (2003), "Handbook of Parameter Estimation for Probabilistic Risk Assessment," NUREG/CR-6823, US NRC.

~~SENSITIVE INFORMATION - OFFICIAL USE ONLY~~

### Appendix A: Dam-Year Tabulation

Dam Name	NID ID Number	Year Completed	NID Height (ft.)	NID Storage (cubic yards)	Dam Years (since 2005)	Dam Years Running total (since 2005)
FRANCIS LAKE	CA00866	2000	79	1,805	5	5
DIAMOND VALLEY LAKE	CA01410	2000	284	800,000	5	10
HANSEN RECREATIONAL LAKE	CA01448	1999	50	85	6	16
LOLONS VINEYARDS	CA01423	1999	87	209	6	22
SEVEN OAKS	CA10324	1999	550	145,800	6	28
MELROSE AVENUE	CA01400	1998	57	52	7	35
AMARGOSA CREEK	CA01408	1998	65	1,187	7	42
HICKS CANYON RB	CA01414	1997	80	110	8	50
DENNIS NO 2	CA01398	1997	60	148	8	58
RMG WEST TAILINGS DAM	NV10506	1997	94	9,567	8	66
LOS VAQUEROS	CA01396	1997	197	100,000	8	74
ARUNDELL BARRANCA	CA01412	1996	57	155	9	83
SEA RANCH	CA01411	1996	81	300	9	92
ILLINOIS CREEK HEAP LEACH DAM	AK00281	1996	83	103	9	101
CHASE GULCH	CO02788	1996	100	1,250	9	110
Stack	AZ00225	1995	54.7	59	10	120
Gold Gulch 1A	AZ00224	1995	106	110	10	130
HUCKLEBERRY CREEK DAM	AR01622	1995	110	23,342	10	140
BEE CANYON RB	CA01360	1994	82	243	11	151
BRICK FLAT PIT CONT	CA01397	1994	85	220	11	162
ROUND CANYON RB	CA01378	1994	98	298	11	173
JAMESTOWN MINES T	CA01245	1994	200	12,100	11	184
MACKS CREEK	ID00480	1993	52.5	489	12	196
RED DOG TAILINGS DAM	AK00201	1993	172	24,757	12	208
LANGTRY	CA01350	1992	50	525	13	221
SANDS HILL SLURRY IMPOUNDMENT DAM	OH02839	1992	131	1,200	13	234
HEITZ	CA01346	1991	87	272	14	248
BRADLEY LAKE SPILLWAY DAM	AK83023	1991	115	284,150	14	262
BRADLEY LAKE DAM	AK83016	1991	125	284,150	14	276
L PETERS CAN RB	CA01207	1990	52	206	15	291
PANTHER CREEK RESERVOIR	AR01498	1990	57	280	15	306
CENTENNIAL	CA01248	1990	82	635	15	321
MOLYCORP TAILING DAM 5A	NM00531	1990	73	3,830	15	336
PAD 6 OVERFLOW POND DAM	SC02578	1990	80	55	15	351
MCCOY/COVE TAILINGS STORAGE FACILITY	NV10301	1990	140	22,425	15	366
HOMESTAKE TAILINGS	CA01205	1990	169	0	15	381
PLYMOUTH EFFL	CA01189	1989	59	187	16	397
HARVEY PLACE	CA01222	1989	72	3,700	16	413
RED DOG WATER SUPPLY DAM	AK00200	1989	75	884	16	429
DOVE CANYON	CA01248	1989	88	415	16	445
NEW SPICER MEADOW	CA01224	1989	262	189,000	16	461
CSP MULE CREEK	CA01195	1988	51	535	17	478
FOSS VALLEY	CA01268	1988	58	800	17	495
FOOTHILL PARK	CA00868	1988	86	87	17	512
DAY CREEK DB	CA01232	1988	90	140	17	529
Schoens	AZ00207	1988	143.6	82,000	17	546
YATESVILLE DAM	KY82201	1988	156	83,300	17	563
RAMONA	CA01215	1988	228	12,200	17	580
Mt St Helens Sediment Retention Structure	WA00558	1988	240	126,000	17	597
ANTELOPE	CA01213	1987	57	784	18	615
STEVENOT	CA01301	1987	70	150	18	633
BALSAM MEADOW	CA01283	1986	127	2,040	19	652
BRADFORD	CA01283	1985	58	440	20	672
JAYNE S LAKE	CA01282	1985	70	1,225	20	692
PAPILLION CREEK & TRIB. SITE 18	NE82202	1985	90	18,282	20	712
DAVIS CREEK	CA01223	1985	105	8,079	20	732
RED MOUNTAIN RES	CA00225	1985	120	1,350	20	752
EDWARDS RES	CA01240	1985	120	596	20	772
TRABUCO	CA01241	1984	108	138	21	793
TERROR LAKE	AK83008	1984	193	108,000	21	814
GARNETT, CITY OF, CEDAR CREEK RESERVOIR	KS97008	1983	70	24,000	22	836
ANDREW CADEMARTORI	CA01274	1983	80	142	22	858
CULMBACK	WA00208	1983	282	153,260	22	880
CALERO	CA01209	1982	55	2,832	23	903
FLAT ROCK CREEK SITE 1	AR01442	1982	57	509	23	926
MERLO	CA01313	1982	74	930	23	949
COEN C-3	CA01317	1982	97	480	23	972
Gold Gulch #2	AZ00194	1982	116.3	580	23	995
SOLOMON GULCH SPILLWAY	AK83021	1981	55	31,500	24	1,019
COMAL RIVER WS SCS SITE 2 DAM	TX04788	1981	75	18,024	24	1,043
STANLEY A MAHR RES	CA01280	1981	79	185	24	1,067
LAS LLAJAS	CA01217	1981	86	1,250	24	1,091
SOLOMON GULCH	AK00027	1981	115	31,500	24	1,115
Jennings Randolph	MD00069	1981	296	130,900	24	1,139
LAKEPORT	CA01230	1980	51	650	25	1,164
PORTOLA	CA01183	1980	53	588	25	1,189
SAND CREEK	CA01180	1980	80	1,050	25	1,214
CUCAMONGA CR DB	CA01277	1980	80	355	25	1,239
DEER CANYON DB	CA01231	1980	78	24	25	1,264
PEA RIDGE TAILINGS DAM	MO30473	1980	150	4,100	25	1,289
PAINTSVILLE DAM	KY82202	1980	180	73,500	25	1,314
APPLGATE DAM	OR00824	1980	242	89,300	25	1,339
GRINDING ROCK	CA01184	1979	55	330	26	1,365
FLAT TOP MINE #1 IMPOUNDMENT	AL01519	1979	75	35	26	1,391
BESSIE MINES #3 IMPOUNDMENT	AL01525	1979	100	66	26	1,417
SOULAJULE	CA01083	1979	122	10,700	26	1,443
UPPER OSO	CA01145	1978	142	3,700	26	1,469
WASTEWATER STORAGE	CA01137	1978	75	212	27	1,496
SANTA MONICA DB	CA01134	1978	102	78	27	1,523
QUARTZ	CA01146	1978	104	1,500	27	1,550
SAFE SHUTDOWN IMPOUNDMENT DAM	TX04812	1977	70	500	28	1,578
LOS ANGELES RES	CA01081	1977	130	10,000	28	1,606
DEQUEEN	AR01201	1977	180	370,600	28	1,634

~~SENSITIVE INFORMATION - OFFICIAL USE ONLY~~

Dam Name	NID Number	Year Completed	NID Height (ft.)	NID Storage (cubic yards)	Dam Years (since 2005)	Dam Years Running total (since 2005)
NEW U SAN LEANDRO	CA01082	1977	182	42,000	28	1,882
LITTLE BLUE RUN	PA00917	1977	400	73,000	28	1,890
SUNFLOWER	CA01118	1976	50	420	29	1,719
LAKE CO SAN DIST 2	CA01108	1976	77	870	29	1,748
HOLMAN	CA01128	1976	101	250	29	1,777
MISSION VIEJO LAKE	CA01122	1976	123	4,300	29	1,806
NEW LAKE ARROWHEAD	CA01124	1976	225	1,970	29	1,835
WILLIAM L. JESS	OR00612	1976	345	500,000	29	1,864
POND 2B	CA01092	1975	55	88	30	1,894
FOREST MEADOWS	CA01120	1975	60	117	30	1,924
LIVE OAK RES	CA01084	1975	105	2,500	30	1,954
TRAMPAS CANYON	CA01123	1975	183	5,700	30	1,984
EAGLE RANCH	CA01101	1974	65	300	31	2,015
ASUNORRIS BRANCH	NC01524	1974	112	782	31	2,046
ELDERBERRY FB	CA01080	1974	179	28,400	31	2,077
MOKEJUMNE HILL	CA01111	1973	62	52	32	2,109
BOYD NO 2	CA01054	1973	53	870	32	2,141
J C JACOBSEN	CA00587	1973	56	1,820	32	2,173
JOCASSEE SPILLWAY	SC02767	1973	84	1,287,788	32	2,205
RESERVOIR A	CA01112	1973	93	180	32	2,237
NOCKAMIXON	PA00734	1973	102	71,000	32	2,269
ROBERT A SKINNER	CA00223	1973	109	43,800	32	2,301
JEFF DAVIS	CA00309	1973	114	1,800	32	2,333
PERRIS	CA00054	1973	130	131,452	32	2,365
LAUREL DAM	KY03046	1973	282	435,600	32	2,397
CASTAIC	CA00044	1973	340	323,700	32	2,429
JOCASSEE	SC00529	1973	385	1,287,788	32	2,461
RANCHO SECO	CA00825	1972	58	2,950	33	2,494
EWING	CA00903	1972	63	887	33	2,527
Lower Rimrock Dam	WA00038	1972	87	550	33	2,560
CHESBRO	CA00665	1972	79	1,250	33	2,593
CRAWFORD RANCH	CA00977	1972	80	340	33	2,626
LAUREL CREEK	PA00578	1972	135	4,980	33	2,659
WESTLAKE RES	CA00904	1972	158	8,200	33	2,692
YANKEE DODDLE TAILINGS DAM	MT01425	1972	570	7,200	33	2,725
CANADA ROAD	CA00055	1971	52	74	34	2,759
STRAZA	CA01084	1971	82	185	34	2,793
LACKAWANNA	PA00913	1971	89	14,200	34	2,827
ALISAL CREEK	CA00731	1971	93	2,342	34	2,861
TURNER	CA00905	1971	111	2,000	34	2,895
MANITOU	CO00428	1971	124	1,100	34	2,929
POWAY	CA00909	1971	182	3,300	34	2,963
DON PEDRO	CA00291	1971	588	2,030,000	34	2,997
MURRAY	CA01061	1970	55	117	35	3,032
PALO VERDE	CA00789	1970	87	730	35	3,067
ANTHONY HOUSE	CA00964	1970	75	3,840	35	3,102
L VAN NORMAN BYPASS	CA00101	1970	78	240	35	3,137
Willow Springs	AZ00068	1970	87.7	4,230	35	3,172
DIXON	CA00878	1970	116	2,500	35	3,207
Silver Basin	AZ00022	1970	180	8,000	35	3,242
TERMINAL	CA00888	1969	53	844	36	3,278
Clear Branch Creek Dam	OR00451	1969	111	4,000	36	3,314
BIG CREEK	CA00652	1969	120	7,850	36	3,350
WOOD CREEK LAKE DAM	KY00058	1969	183	29,101	36	3,386
LOPEZ	CA00887	1969	188	52,500	36	3,422
WIDE CANYON	CA00803	1968	84	1,480	37	3,459
COYOTE CREEK	CA00572	1968	92	3,375	37	3,496
SUMMIT RES	CA00148	1968	124	220	37	3,533
EAU GALLE	WI00780	1968	127	58,900	37	3,570
SANTA YNEZ CANYON	CA00100	1968	157	358	37	3,607
WALNUT CANYON	CA00889	1968	187	2,570	37	3,644
DEL VALLE	CA00043	1968	222	77,100	37	3,681
MINERAL HOT SPRINGS LAKE	CA01028	1967	54	37	38	3,719
SWAN	CA00666	1967	59	550	38	3,757
HILLSIDE RANCH	CA01067	1967	80	210	38	3,795
MAGNOLIA	CA00968	1967	88	4,150	38	3,833
INDIAN CREEK	CA00894	1967	71	3,160	38	3,871
MSD TREATMENT PLANT DAM	NC00320	1967	75	385	38	3,909
WALNUT CR CLRWELL	CA00175	1967	102	25	38	3,947
EL TORO RES	CA00875	1967	106	877	38	3,985
MOLYCORP TAILINGS	CA01394	1967	118	309	38	4,023
FOSTER	OR00012	1967	128	81,000	38	4,061
Capt Creek Upper	CO01238	1967	215	1,800	38	4,099
HOMESTAKE PROJECT	CO00673	1967	285	45,870	38	4,137
Faustine Lake Main	CA00266	1966	51	4,020	38	4,178
HAWKEYE	CA01052	1966	88	140	39	4,215
RIGHETTI	CA00725	1966	83	880	39	4,254
McSwain	CA00242	1966	97	10,000	39	4,293
Chevelon Canyon	AZ00048	1966	100	8,542	39	4,332
GRIZZLY VALLEY	CA00039	1966	115	83,000	39	4,371
N. FORK OF POUND DAM	VA19501	1966	122	11,293	39	4,410
SAN JOAQUIN RES	CA00853	1966	224	3,038	39	4,449
LOWER HELL HOLE	CA00857	1966	410	208,400	39	4,488
HARTZELL	CA00727	1965	50	300	40	4,528
Yards Creek Upper - West Dam	NJ83004	1965	52	4,900	40	4,568
HAYNES RES	CA01030	1965	67	5,870	40	4,608
REBA	CA00842	1965	70	240	40	4,648
UPPER BLUE	CO00871	1965	75	2,835	40	4,688
DUTCH FLAT 2 FB	CA00258	1965	77	185	40	4,728
Youngs River Reservoir	OR03832	1965	81	12,000	40	4,768
GRASSHOPPER HOLLOW TAILINGS DAM	WV08523	1965	129	1,260	40	4,808
WOOD RANCH	CA00850	1965	146	11,000	40	4,848
Dulch Flat Afterbay	CA00257	1965	165	2,040	40	4,888
JACKSON CREEK	CA00667	1965	193	22,000	40	4,928
JACKSON MEADOWS	CA00254	1965	195	52,500	40	4,968

~~SENSITIVE INFORMATION - OFFICIAL USE ONLY~~

~~SENSITIVE INFORMATION - OFFICIAL USE ONLY~~

Dam Name	RID ID Number	Year Completed	RID Height (ft)	RID Storage (cubic yards)	Dam Years since 2005	Dam Years Running total (since 2005)
SAN ANTONIO	CA00813	1965	202	350,000	40	5,008
FALL CREEK	OR00007	1965	205	125,000	40	5,048
IRON CANYON	CA00417	1965	214	24,300	40	5,088
L L ANDERSON	CA00858	1965	231	111,333	40	5,128
MCCLOUD	CA00418	1965	240	35,300	40	5,168
SUMMERSVILLE DAM	WV06702	1965	390	413,400	40	5,208
GRIZZLY CREEK	CA00553	1964	50	75	41	5,248
ADA ROSE LAKE	CA00871	1964	50	138	41	5,290
BERNARDO RES	CA00118	1964	54	30	41	5,331
Clinch River Flyash Dam #1	VA18703	1964	55	1,240	41	5,372
BRENTWOOD PARK	CA00851	1964	58	80	41	5,413
Camp Kwonassum Dam	WA00131	1964	80	120	41	5,454
SCOUT LAKE	CA00583	1964	83	1,140	41	5,495
Clinch River Flyash Dam #2	VA18702	1964	85	167	41	5,536
SAN LORENZO CR	CA00841	1964	85	380	41	5,577
HARBOR VIEW	CA00830	1964	85	28	41	5,618
SENIOR CANYON	CA01019	1964	78	73	41	5,659
FISHPOND LAKE DAM	KY00042	1964	105	1,158	41	5,700
ANTELOPE	CA00037	1964	113	22,666	41	5,741
JAMES H TURNER	CA00132	1964	183	50,500	41	5,782
BRIONES	CA00172	1964	273	87,620	41	5,823
ROUND BUTTE	OR00549	1964	440	535,000	41	5,864
COUGAR	OR00015	1964	519	219,000	41	5,905
FOOTHILL REG PARK	CA01057	1963	51	109	42	5,947
LARSON	CA00712	1963	54	325	42	5,989
CULL CREEK	CA00840	1963	56	310	42	6,031
NIMS LAKE DAM	MO30084	1963	57	8,280	42	6,073
Canyon Creek Meadows Reservoir	OR00385	1963	58	400	42	6,115
MARSH CREEK	CA00809	1963	59	4,425	42	6,157
WARD CREEK	CA00839	1963	71	130	42	6,199
LAKE SYMPSON DAM	KY00045	1963	73	4,994	42	6,241
MAST	CA00872	1963	85	380	42	6,283
LOWER SUNSET DB	CA01161	1963	88	37	42	6,325
TAUM SAUK PS UPPER	MO30040	1963	94	4,350	42	6,367
MATANZAS CREEK	CA00794	1963	95	1,500	42	6,409
Loon Lake Auxiliary	CA83069	1963	102	76,500	42	6,451
LOON LAKE	CA00820	1963	108	76,500	42	6,493
VILLA PARK	CA00829	1963	118	15,800	42	6,535
PALISADES RES	CA00843	1963	146	147	42	6,577
VIRGINIA RANCH	CA00842	1963	152	57,000	42	6,619
MAERKLE	CA00844	1963	185	800	42	6,661
CAMANCHE	CA00173	1963	171	417,120	42	6,703
CAMP FAR WEST	CA00227	1963	185	104,500	42	6,745
JOHN W FLANNAGAN DAM	VA05101	1963	250	145,700	42	6,787
UNION VALLEY	CA00816	1963	453	230,000	42	6,829
TOWBAL YLA	CA00589	1962	51	376	43	6,872
MAYHEW RESERVOIR	CA00897	1962	53	18	43	6,915
MINERS RANCH	CA00275	1962	66	912	43	6,958
BOSCH NO 2	CA01044	1962	55	37	43	7,001
HIGHLAND CREEK	CA00828	1962	75	3,500	43	7,044
Lynx Lake	AZ00049	1962	89.2	2,784	43	7,087
PATTERSON	CA00895	1962	100	46	43	7,130
HERNANDEZ	CA00848	1962	124	18,000	43	7,173
OLIVE HILLS RES	CA00870	1962	140	185	43	7,216
DEVELOPMENT NO. 2 DAM	OR00317	1962	145	25,000	43	7,259
ROBERT W MATTHEWS	CA00833	1962	150	51,800	43	7,302
PONDEROSA DIV	CA00274	1962	180	4,760	43	7,345
MARK EDSON	CA00607	1962	182	20,000	43	7,388
CHET HARRITT	CA00738	1962	200	9,790	43	7,431
WILSON DB	CA01162	1961	50	84	44	7,475
DANVILLE	CA00184	1961	75	45	44	7,519
NORTH	CA00183	1961	82	244	44	7,563
BETHANY FOREBAY	CA00033	1961	95	5,250	44	7,607
SEEGER	CA00209	1961	115	22,400	44	7,651
ROSEMONT	CA000471	1961	120	3,155	44	7,695
FRENCHMAN	CA00032	1961	129	55,477	44	7,739
OXBOW	ID00057	1961	175	58,200	44	7,783
CORNWALL TAILINGS	PA00597	1961	200	3,880	44	7,827
LITTLE GRASS VY	CA00269	1961	210	93,010	44	7,871
FRANCIS E WALTER DAM	PA00008	1961	239	180,290	44	7,915
SLY CREEK	CA00272	1961	271	85,050	44	7,959
LEWIS SMITH	AL01420	1961	300	1,670,700	44	8,003
SANTA ANITA DB	CA01155	1960	56	116	45	8,048
BIG DALTON DB	CA01156	1960	59	193	45	8,093
WILLIAM LAKE	CA00586	1960	66	340	45	8,138
LITTLE DALTON DB	CA01154	1960	71	234	45	8,183
DICKSON HILL	CA00885	1960	80	23	45	8,228
MALONEY	CA00180	1960	107	68	45	8,273
ASH CREEK	UT00010	1960	138	12,250	45	8,318
NEWELL	CA00156	1960	182	6,991	45	8,363
WHALE ROCK	CA00028	1960	193	40,862	45	8,408
MAMMOTH POOL	CA00443	1960	406	123,000	45	8,453
BIG CANYON	CA00891	1959	85	800	46	8,499
RATTLESNAKE CAN	CA00855	1959	79	1,480	46	8,545
BELL CANYON	CA00149	1959	95	2,530	46	8,591
ICE HOUSE	CA00814	1959	150	37,120	46	8,637
CARIBOU AFTERBAY	CA00413	1959	184	2,400	46	8,683
EARTHQUAKE LAKE	MT00882	1959	200	69,500	46	8,729
JW WISDA	CA00053	1958	50	45	47	8,776
SIERRA MADRE VIL	CA01156	1958	50	109	47	8,823
EARL THOMAS RES	CA00118	1958	56	107	47	8,870
Perla Bianca	AZ00028	1958	72	1,240	47	8,917
DEER LAKE	CA00579	1958	72	280	47	8,964
SAN MARCOS	CA00785	1958	85	320	47	9,011
MIDDLEFIELD RES	CA00896	1958	147	22	47	9,058

~~SENSITIVE INFORMATION - OFFICIAL USE ONLY~~

~~SENSITIVE INFORMATION - OFFICIAL USE ONLY~~

Dam Name	NID ID Number	Year Completed	NID Height (ft.)	NID Storage (Cubic yards)	Dam Years (since 2005)	Dam Years Running total (since 2005)
Wishon Main	CA00411	1959	285	128,000	47	9,105
Courtright	CA00412	1958	315	123,000	47	9,152
MCMAHON	CA00701	1957	52	520	48	9,200
MURRY	CA01013	1957	54	715	48	9,248
LUNGA DAM	VA17901	1957	56	9,600	48	9,296
A L CHAFFIN	CA00552	1957	65	450	48	9,344
ARROYO SECO	CA00613	1957	67	2,433	48	9,392
SMALL CANYON	CA00314	1957	68	20	48	9,440
PLEASANT VALLEY	CA00088	1957	87	3,825	48	9,488
UVAS	CA00807	1957	118	10,000	48	9,536
PARADISE	CA00297	1957	175	11,500	48	9,584
NACIMIENTO	CA00812	1957	210	350,000	48	9,632
LA VERNE LAKE	CA00983	1956	50	54	49	9,681
COIT	CA01011	1956	54	275	49	9,730
SOUTH	CA00181	1956	58	156	49	9,779
SYCAMORE	CA00800	1956	63	680	49	9,828
ALESSANDRO	CA00796	1956	66	370	49	9,877
TEJON STORAGE 2	CA00729	1956	67	680	49	9,926
ANNADLE NO 1	CA00056	1956	67	395	49	9,975
Fool Hollow	AZ00051	1956	78	5,817	49	10,024
PIKE CREEK	CA00808	1956	87	225	49	10,073
MONTGOMERY	CO00372	1956	112	6,100	49	10,122
CHERRY VALLEY	CA00125	1956	315	273,500	49	10,171
MOSKOWITE	CA00583	1956	50	472	50	10,221
BEVANS CREEK	CA00582	1955	51	215	50	10,271
PORTAL PH FOREBAY	CA00442	1956	65	325	50	10,321
DICK WEEK	CA00585	1955	70	3,140	50	10,371
SAWPIT DB	CA01157	1955	82	152	50	10,421
ELMER J CHESBRO	CA00806	1955	85	8,088	50	10,471
Steer Branch Dam	VA18503	1955	210	40	50	10,521
LUCKY PEAK	ID00288	1955	340	307,000	50	10,571
HARRISON STREET	CA00797	1954	50	208	51	10,622
NULL	CA00933	1954	54	188	51	10,673
RICHARDSON	CA00894	1954	65	520	51	10,724
PINON CANYON DETENTION	CO00105	1954	73	581	51	10,775
UPPER STONE CANYON	CA00897	1954	111	425	51	10,826
GARVEY RES	CA00217	1954	180	1,810	51	10,877
VERMILION VALLEY	CA00441	1954	187	125,000	51	10,928
PETERS	CA00208	1954	230	32,900	51	10,979
FRENCHMAN DAM	MT00003	1953	63	21,000	52	11,031
EAGLE ROCK	CA00084	1953	113	254	52	11,083
GREEN VERDUGO	CA00086	1953	118	89	52	11,135
JAMES J LENIHAN	CA00293	1953	208	21,430	52	11,187
CRYSTAL	CA00573	1952	51	105	53	11,240
DEBELL	CA00686	1952	53	120	53	11,293
SUTRO RESERVOIR	CA00135	1952	55	86	53	11,346
SCHUBIN	CA01045	1952	55	225	53	11,399
POMONIO RANCH	CA01008	1952	63	258	53	11,452
Lower Bear	CA00409	1952	245	54,000	53	11,505
MALLACOMES	CA00591	1951	57	200	54	11,559
NIEGEL	CA01047	1951	61	145	54	11,613
RICKEY	CA01009	1951	64	47	54	11,667
Little Hall s Canyon	AZ00215	1951	69.5	1,545	54	11,721
NOVATO CREEK	CA00321	1951	71	4,430	54	11,775
MIDDLE CREEK DAM	MT00018	1951	110	10,230	54	11,829
BELLETT	CA00542	1950	54	90	55	11,884
GLEN MARTIN	CA00754	1950	55	33	55	11,939
DIEDERICH RES	CA00084	1950	80	174	55	11,994
PEABODY	CA00685	1950	83	68	55	12,048
MARLOWE HEIRS REFUSE DAM-WHITE OAK BRANCH	KY00685	1950	80	316	55	12,104
STOCKTON CREEK	CA00699	1950	85	368	55	12,158
AUSTRIAN	CA00680	1950	185	6,200	55	12,214
LEROY ANDERSON	CA00294	1950	235	91,280	55	12,269
SYPHON CANYON	CA00749	1949	59	500	56	12,325
GLENDAKS 988 RES	CA00685	1949	62	28	56	12,381
QUEENS CREEK	NC00333	1949	78	718	56	12,437
BON TEMPE	CA00207	1949	88	4,300	56	12,493
LOS PADRES	CA00692	1949	148	3,100	56	12,549
BIG DRY CREEK	CA01075	1948	60	30,200	57	12,606
JACOBS CREEK	CA00232	1948	53	587	57	12,663
LA HERRADURA	CA00582	1948	73	110	57	12,720
French Lake	CA00247	1948	100	13,800	57	12,777
SCOTTS FLAT	CA00253	1948	175	49,000	57	12,834
MUD MOUNTAIN DAM	WA00300	1948	425	108,000	57	12,891
KUHN	CA00683	1947	67	85	58	12,949
DOS PUEBLOS	CA00730	1946	78	300	59	13,008
CONN CREEK	CA00104	1946	125	31,000	59	13,067
RECTOR CREEK	CA00011	1946	184	4,587	59	13,126
RUBIO DB	CA00202	1944	84	44	61	13,187
PIT 5 COND EMBANK	CA00403	1943	81	1,147	62	13,249
ELYSIAN	CA00089	1943	71	167	62	13,311
NANTAHALA	NC00371	1942	250	126,000	63	13,374
CHORRO CREEK	CA01076	1941	77	90	64	13,438
ORANGE COUNTY RESERVOIR	CA00218	1941	103	217	64	13,502
LONG VALLEY	CA00090	1941	128	183,465	64	13,566
THORPE	NC00378	1941	150	67,100	64	13,630
THORPE LAKE DAM #1 (NP&L FERC)	NC00338	1941	150	150	64	13,684
CALVERA	CA00781	1940	67	520	65	13,749
GRANT LAKE	CA00089	1940	87	47,525	65	13,814
CHEVY CHASE 1290	CA01078	1940	90	17	65	13,869
MUNICIPAL	CA00155	1939	56	169	65	13,935
KIMBALL CREEK	CA00310	1939	80	344	66	14,001
PALOS VERDES RES	CA00215	1939	82	1,100	66	14,067
NORTH FORK	CA00299	1939	100	6,150	66	14,133
YELLOW WATER MAIN DAM	MT00012	1938	55	6,100	67	14,200

~~SENSITIVE INFORMATION - OFFICIAL USE ONLY~~

~~SENSITIVE INFORMATION - OFFICIAL USE ONLY~~

Dam Name	NID ID Number	Year Completed	NID Height (ft.)	NID Storage (cubic yards)	Dam Years since 2005	Dam Years Running total (since 2005)
RANCHO DEL CIEVRO	CA00719	1938	85	165	67	14,287
SUNSET N BASIN	CA00134	1938	74	275	67	14,354
SUTTENFIELD	CA00010	1938	78	800	67	14,421
C L TILDEN PARK	CA00181	1938	68	268	67	14,488
GREGORY LAKE	CA00224	1938	90	2,100	67	14,555
MATHEWS	CA00212	1938	284	182,000	67	14,622
SAN GABRIEL NO 1	CA00200	1938	320	44,183	67	14,689
GLACIER LAKE NORTH DAM	MT00068	1937	67	4,980	68	14,757
UNIV MOUND S BN	CA00133	1937	61	250	68	14,825
CHERRY FLAT	CA00168	1938	60	500	69	14,894
EATON WASH DB	CA00201	1938	63	721	69	14,963
WEST VALLEY	CA00300	1938	85	23,000	69	15,032
ALMADEN	CA00288	1938	110	2,000	69	15,101
COYTE	CA00287	1938	140	23,698	69	15,170
BIG CANYON CR	CA00811	1935	63	395	70	15,240
LAKE QUIVIRA, CITY OF, LAKE QUIVIRA DAM	KS02874	1935	80	2,998	70	15,310
CALERO	CA00288	1935	90	9,850	70	15,380
STEVENS CREEK	CA00292	1935	130	3,800	70	15,450
GUADALUPE	CA00290	1935	142	3,460	70	15,520
COGSWELL	CA00190	1935	266	8,969	70	15,590
BOUQUET CANYON	CA00088	1934	190	36,505	71	15,661
UPPER HOLLYWOOD	CA00087	1933	87	196	72	15,733
SANTIAGO CREEK	CA00298	1933	136	25,000	72	15,806
PETERS CANYON	CA00746	1932	54	1,090	73	15,878
WHITTIER RES NO 4	CA00153	1931	55	32	74	15,952
SWANZY LAKE	CA00144	1931	86	107	74	16,026
SALT SPRINGS	CA00382	1931	332	141,800	74	16,100
MOCCASIN LOWER	CA00122	1930	60	554	75	16,175
GRIZZLY	CO01545	1930	65	987	75	16,250
FELT LAKE	CA00870	1930	67	900	75	16,326
Haskins Creek Dam	OR00115	1930	65	704	75	16,400
BRAND PARK	CA00081	1930	99	32	75	16,475
LAFAYETTE	CA00183	1929	132	4,250	76	16,551
GEUNOC LAKE	CA00584	1928	50	3,237	77	16,628
WUEST	CA00780	1928	50	280	77	16,705
COYTE FLAT	CA00513	1928	52	5,250	77	16,782
THOMPSON CREEK	CA00188	1928	66	543	77	16,859
BUCKS STORAGE	CA00332	1928	122	103,000	77	16,938
PUDDINGSTONE	CA00194	1928	147	18,342	77	17,013
BIG TOOTH	CO00446	1927	120	205	78	17,091
BOWMAN	CA00245	1927	175	64,000	78	17,169
PHILBROOK	CA00345	1928	85	5,180	79	17,248
CURRY LAKE	CA00140	1926	107	10,700	79	17,327
BLACK ROCK CR	CA00693	1925	57	30	80	17,407
SKAGWAY	CO00481	1925	79	3,570	80	17,487
THOMPSON	CA00445	1925	114	1,010	80	17,567
DIX RIVER DAM	KY00316	1926	287	230,500	80	17,647
BRIDGEPORT	CA00284	1924	83	44,100	81	17,728
ENCINO	CA00070	1924	188	9,789	81	17,809
STONE CANYON	CA00083	1924	188	10,372	81	17,890
HENDERSON	CA00005	1923	56	500	82	17,972
EL DORADO FOREBAY	CA00375	1923	91	472	82	18,054
DRINKWATER	CA00077	1923	105	92	82	18,136
CAPLES LAKE	CA00378	1922	71	21,580	83	18,219
Spruce Hollow	MD00349	1920	50	150	85	18,304
SAN PABLO	CA00188	1920	170	43,193	85	18,389
Depps	AZ00013	1919	68	13,750	86	18,475
BOX ELDER CREEK (CHATFIELD)	UT00050	1916	50	511	89	18,584
MAIN STRAWBERRY	CA00388	1916	143	18,312	89	18,663
Drews Reservoir	OR00049	1914	83	65,000	91	18,744
CUCHARAS #5	CO01146	1913	145	103,000	92	18,836
SAND CANYON	CA00854	1912	58	960	93	18,929
Lyman	AZ00004	1912	76.4	44,500	93	19,022
MORENA	CA00110	1912	181	50,208	93	19,115
VALLEY LAKE	CA00361	1911	74	8,127	94	19,209
Wenas Dam	WA00002	1911	90	5,600	94	19,303
SAWMILL LAKE	CA00250	1910	60	3,040	95	19,398
CENTRAL	CA00182	1910	55	485	95	19,493
HILLSIDE	CA00445	1910	81	12,883	95	19,588
RELIEF	CA00380	1910	145	15,122	95	19,683
CRANE VAL STOR	CA00337	1910	145	45,410	95	19,778
STANISLAUS FB	CA00391	1908	80	340	97	19,875
MARIE LAKE	CA00004	1908	80	170	97	19,972
SABRINA	CA00448	1908	70	8,376	97	20,069
MADIGAN LAKE	CA00141	1908	88	1,744	97	20,166
KUNKLE	CA00344	1907	54	253	98	20,264
PHOENIX LAKE	CA00206	1907	80	612	98	20,362
HERMAN LAKE	CA00851	1905	51	2,210	100	20,462
BERRYMAN RES	CA00168	1905	80	45	100	20,562
PIEDMONT	CA00170	1905	84	60	100	20,662
DESABLA FOREBAY	CA00343	1903	53	280	102	20,764
MEADOW LAKE	CA00381	1903	77	5,180	102	20,866
ESTATES	CA00189	1903	93	56	102	20,968
TERMINAL	CO00895	1902	103	29,600	103	21,071
CHOLLAS	CA00107	1901	50	310	104	21,175
Hogan Dam	VA15504	1900	80	1,285	105	21,280
Upper Bear	CA83278	1900	77	7,400	105	21,385
BEAR RIVER	CA00379	1900	83	8,818	105	21,490
TORESON	CA00483	1898	55	1,140	107	21,597
BEAR GULCH	CA00858	1895	61	872	109	21,706
River Reservoir #3	AZ00007	1895	68.5	3,185	109	21,815
FREY LAKE	CA00142	1894	83	1,075	111	21,926
RED ROCK NO 1	CA00510	1893	83	10,000	112	22,038
FOREST LAKE	CA00880	1892	60	427	113	22,151
SUMMIT	CA00171	1891	61	117	114	22,265

~~SENSITIVE INFORMATION - OFFICIAL USE ONLY~~

~~SENSITIVE INFORMATION - OFFICIAL USE ONLY~~

Dam Name	NID ID Number	Year Completed	NID Height (ft.)	NID Storage (cubic yards)	Dam Years (since 2005)	Dam Years Running total (since 2005)
COWELL RESERVIOR	CA00046	1890	50	175	115	22,380
SEQUOIA LAKE	CA00709	1888	51	1,370	117	22,487
YOSEMITE LAKE	CA00241	1888	53	8,101	117	22,614
EMERALD LAKE 1 LOWER	CA00668	1885	57	45	120	22,734
PHOENIX	CA00369	1880	52	455	125	22,859
SPENSER LAKE	CA00873	1878	87	73	129	22,988
FORDYCE LAKE	CA00367	1873	143	48,900	132	23,120
SAN ANDREAS	CA00128	1870	107	19,027	135	23,255
TEMESCAL LAKE	CA00160	1869	118	200	136	23,381
PILARCITOS	CA00128	1866	103	3,100	138	23,530
EMERY	CA00818	1850	53	630	155	23,685
NOTRE DAME	CA00874		51	120		
LOWER STEHLY	CA01227		60	145		
AUXILIARY RESERVOIR C	CA01456		85	3,700		
LANG CREEK DEYN BN	CA01368		67	263		
SLICKROCK CREEK	CA01444		155	220		
WESINER HOLLOW SLURRY DAM	PA01841		182	3,948		

~~SENSITIVE INFORMATION - OFFICIAL USE ONLY~~