

Radioactive Effluents from Nuclear Power Plants

Annual Report 2019

AVAILABILITY OF REFERENCE MATERIALS IN NRC PUBLICATIONS

NRC Reference Material

As of November 1999, you may electronically access NUREG-series publications and other NRC records at the NRC's Library at www.nrc.gov/reading-rm.html. Publicly released records include, to name a few, NUREG-series publications; *Federal Register* notices; applicant, licensee, and vendor documents and correspondence; NRC correspondence and internal memoranda; bulletins and information notices; inspection and investigative reports; licensee event reports; and Commission papers and their attachments.

NRC publications in the NUREG series, NRC regulations, and Title 10, "Energy," in the *Code of Federal Regulations* may also be purchased from one of these two sources:

1. The Superintendent of Documents

U.S. Government Publishing Office
Washington, DC 20402-0001
Internet: www.bookstore.gpo.gov
Telephone: (202) 512-1800
Fax: (202) 512-2104

2. The National Technical Information Service

5301 Shawnee Road
Alexandria, VA 22312-0002
Internet: www.ntis.gov
1-800-553-6847 or, locally, (703) 605-6000

A single copy of each NRC draft report for comment is available free, to the extent of supply, upon written request as follows:

Address: **U.S. Nuclear Regulatory Commission**
Office of Administration
Division of Resource Management & Analysis
Washington, DC 20555-0001
E-mail: distribution.resource@nrc.gov
Facsimile: (301) 415-2289

Some publications in the NUREG series that are posted at the NRC's Web site address www.nrc.gov/reading-rm/doc-collections/nuregs are updated periodically and may differ from the last printed version. Although references to material found on a Web site bear the date the material was accessed, the material available on the date cited may subsequently be removed from the site.

Non-NRC Reference Material

Documents available from public and special technical libraries include all open literature items, such as books, journal articles, transactions, *Federal Register* notices, Federal and State legislation, and congressional reports. Such documents as theses, dissertations, foreign reports and translations, and non-NRC conference proceedings may be purchased from their sponsoring organization.

Copies of industry codes and standards used in a substantive manner in the NRC regulatory process are maintained at—

The NRC Technical Library

Two White Flint North
11545 Rockville Pike
Rockville, MD 20852-2738

These standards are available in the library for reference use by the public. Codes and standards are usually copyrighted and may be purchased from the originating organization or, if they are American National Standards, from—

American National Standards Institute

11 West 42nd Street
New York, NY 10036-8002
Internet: www.ansi.org
(212) 642-4900

Legally binding regulatory requirements are stated only in laws; NRC regulations; licenses, including technical specifications; or orders, not in NUREG-series publications. The views expressed in contractor prepared publications in this series are not necessarily those of the NRC.

The NUREG series comprises (1) technical and administrative reports and books prepared by the staff (NUREG-XXXX) or agency contractors (NUREG/CP-XXXX), (2) proceedings of conferences (NUREG/CP-XXXX), (3) reports resulting from international agreements (NUREG/IA-XXXX), (4) brochures (NUREG/BR-XXXX), and (5) compilations of legal decisions and orders of the Commission and the Atomic and Safety Licensing Boards and of Directors' decisions under Section 2.206 of the NRC's regulations (NUREG-0750).

DISCLAIMER: This report was prepared as an account of work sponsored by an agency of the U.S. Government. Neither the U.S. Government nor any agency thereof, nor any employee, makes any warranty, expressed or implied, or assumes any legal liability or responsibility for any third party's use, or the results of such use, of any information, apparatus, product, or process disclosed in this publication, or represents that its use by such third party would not infringe privately owned rights.

Radioactive Effluents from Nuclear Power Plants

Annual Report 2019

Manuscript Completed: August 2021
Date Published: September 2021

Prepared by:
J. Davis

Oak Ridge Associated Universities
1299 Bethel Valley Road, SC-200, MS-21
Oak Ridge, TN 37830

Steven Garry, NRC Project Manager
Micheal Smith, NRC Project Manager

ABSTRACT

In 2019, there were 96 commercial nuclear power plants (NPPs) in operation at 57 sites in the United States (U.S.) regulated by the Nuclear Regulatory Commission (NRC). Each year, each power reactor sends a report to the NRC that identifies the radioactive gaseous and liquid effluents discharged from the facility. In 2019, these effluent reports comprised about 10,000 pages of information, which described the radioactive materials discharged, as well as the resulting radiation doses to the general public. This report summarizes that information and presents the information in a format intended for both nuclear professionals and the general public.

The reader can use this report to quickly characterize the radioactive discharges from any U.S. NPP in 2019. The radioactive effluents from one reactor can be compared with other reactors. The results can also be compared with typical (or median) effluents for the industry, including short-term trends and long-term trends.

Reference information is included so the reader can compare the doses from NPP effluents with the doses that the general public receives from other sources of radiation, such as medical procedures, industrial devices, and naturally occurring radioactive materials in the environment.

Although all operating NPPs released some radioactive materials in 2019, all effluents discharged were within the NRC's and the Environmental Protection Agency's (EPA's) public dose limits, and NRC's "as low as is reasonably achievable" (ALARA) criteria. Additionally, the doses from radioactive effluents were much less than the doses from other sources of natural radiation that are commonly considered safe. This indicates radioactive effluents from NPPs in 2019 had no significant impact on the health and safety of the public or the environment.

TABLE OF CONTENTS

ABSTRACT	iii
TABLE OF CONTENTS	v
LIST OF FIGURES	vii
LIST OF TABLES.....	ix
ABBREVIATIONS AND ACRONYMS.....	xi
1 INTRODUCTION.....	1-1
1.1 Purpose	1-1
1.2 Scope	1-1
1.3 Source of Data.....	1-5
1.4 Limitations of Data.....	1-5
2 DESCRIPTION OF THE DATA.....	2-1
2.1 Introduction.....	2-1
2.2 Measuring Radioactivity in Radioactive Effluents.....	2-1
2.3 Dose Units and Limits	2-3
2.4 Radiation Dose to the Public	2-4
2.5 Other Sources of Radiation Dose to the U.S. Population.....	2-5
3 EFFLUENT DATA.....	3-1
3.1 Radioactive Materials in Gaseous and Liquid Effluents	3-1
3.2 Short-Term Trend in Gaseous Effluents.....	3-38
3.3 Long-Term Trend in Gaseous Effluents	3-42
3.4 Short-Term Trend in Liquid Effluents	3-43
3.5 Long-Term Trend in Liquid Effluents	3-47
3.6 Radiation Doses from Gaseous and Liquid Effluents	3-48
4 SUMMARY	4-1
5 REFERENCES	5-1
6 GLOSSARY	6-1

LIST OF FIGURES

Figure 2.1	Sources of Radiation Exposure to the U.S. Population	2-6
Figure 3.1	BWR Gaseous Releases — Fission and Activation Gases.....	3-19
Figure 3.2	BWR Gaseous Releases — Iodine	3-20
Figure 3.3	BWR Gaseous Releases — Particulates	3-21
Figure 3.4	BWR Gaseous Releases — Tritium	3-22
Figure 3.5	BWR Gaseous Releases — Carbon-14	3-23
Figure 3.6	PWR Gaseous Releases — Fission and Activation Gases.....	3-24
Figure 3.7	PWR Gaseous Releases — Iodine	3-26
Figure 3.8	PWR Gaseous Releases — Particulates	3-27
Figure 3.9	PWR Gaseous Releases — Tritium	3-28
Figure 3.10	PWR Gaseous Releases — Carbon-14	3-30
Figure 3.11	BWR Liquid Releases — Fission and Activation Products.....	3-32
Figure 3.12	BWR Liquid Releases — Tritium	3-33
Figure 3.13	PWR Liquid Releases — Fission and Activation Products.....	3-34
Figure 3.14	PWR Liquid Releases — Tritium	3-36
Figure 3.15	Long-Term Trend in Noble Gases in Gaseous Effluents.....	3-42
Figure 3.16	Long-Term Trend in MFAP in Liquid Effluents	3-47
Figure 3.17	BWR Gaseous Effluents — Maximum Annual Organ Dose.....	3-55
Figure 3.18	PWR Gaseous Effluents — Maximum Annual Organ Dose.....	3-56
Figure 3.19	BWR Liquid Effluents — Maximum Annual Total Body and Organ Dose	3-58
Figure 3.20	PWR Liquid Effluents — Maximum Annual Total Body and Organ Dose	3-59
Figure 3.21	Median Maximum Annual Organ Dose, Gaseous Effluents 5-Year Trend, 2015–2019	3-61
Figure 3.22	Median Maximum Annual Dose, Liquid Effluents 5-Year Trend, 2015–2019.....	3-61

LIST OF TABLES

Table 1.1	Operating Nuclear Power Plants, 2019	1-2
Table 1.2	Permanently Shut Down Nuclear Power Plants, 2019	1-4
Table 1.3	Reactors for Which the NRC Has Normalized Data on a per Reactor Basis	1-6
Table 2.1	Radionuclides in Gaseous Effluents	2-2
Table 2.2	Radionuclides in Liquid Effluents	2-3
Table 3.1	BWR Gaseous Releases — Fission and Activation Gases, 2019	3-2
Table 3.2	BWR Gaseous Releases — Iodine, 2019	3-3
Table 3.3	BWR Gaseous Releases — Particulates, 2019	3-4
Table 3.4	BWR Gaseous Releases — Tritium, 2019	3-5
Table 3.5	BWR Gaseous Releases — Carbon-14, 2019	3-6
Table 3.6	PWR Gaseous Releases — Fission and Activation Gases, 2019	3-7
Table 3.7	PWR Gaseous Releases — Iodine, 2019	3-9
Table 3.8	PWR Gaseous Releases — Particulates, 2019	3-10
Table 3.9	PWR Gaseous Releases — Tritium, 2019	3-12
Table 3.10	PWR Gaseous Releases — Carbon-14, 2019	3-13
Table 3.11	BWR Liquid Releases — Fission and Activation Products, 2019	3-14
Table 3.12	BWR Liquid Releases — Tritium, 2019	3-15
Table 3.13	PWR Liquid Releases — Fission and Activation Products, 2019	3-16
Table 3.14	PWR Liquid Releases — Tritium, 2019	3-18
Table 3.15	Short-Term Trend in Noble Gases in Gaseous Effluents, BWRs, Curies (Ci)	3-39
Table 3.16	Short-Term Trend in Noble Gases in Gaseous Effluents, PWRs, Curies (Ci)	3-40
Table 3.17	Short-Term Trend in Mixed Fission and Activation Products in Liquid Effluents, BWRs, millicuries (mCi)	3-44
Table 3.18	Short-Term Trend in Mixed Fission and Activation Products in Liquid Effluents, PWRs, millicuries (mCi)	3-45
Table 3.19	BWR Gaseous Effluents — Maximum Annual Organ Dose, 2019	3-51
Table 3.20	PWR Gaseous Effluents — Maximum Annual Organ Dose, 2019	3-52
Table 3.21	BWR Liquid Effluents — Maximum Annual Total Body and Organ Dose, 2019	3-53
Table 3.22	PWR Liquid Effluents — Maximum Annual Total Body and Organ Dose, 2019	3-54

ABBREVIATIONS AND ACRONYMS

ALARA	as low as is reasonably achievable
ARERR	Annual Radioactive Effluent Release Report
Bq	becquerel
BWR	boiling-water reactor
C-14	carbon-14
CFR	Code of Federal Regulations
Ci	curie
DOE	Department of Energy
EPA	Environmental Protection Agency
GBq	gigabecquerels
H-3	tritium (hydrogen-3)
mCi	millicurie
MFAP	mixed fission and activation products
MIMS	Department of Energy's Manifest Information Management System
mrem	millirem
mSv	millisievert
NCRP	National Council on Radiation Protection and Measurements
NPP	nuclear power plant
NRC	Nuclear Regulatory Commission
ODCM	Offsite Dose Calculation Manual
PWR	pressurized-water reactor
RG	Regulatory Guide
SI	International System of Units (abbreviation is from the French: <i>Le Système International d'Unités</i>)
Sv	sievert
U.S.	United States
USGS	United States Geological Survey

1 INTRODUCTION

1.1 Purpose

This report describes radioactive effluents for the 96 operating commercial nuclear power plants (NPPs) in the United States (U.S.) during calendar year 2019. It is based on an extensive amount of information submitted to the Nuclear Regulatory Commission (NRC) by the NPP licensees operating in the United States. The original information was submitted by the NPPs in their Annual Radioactive Effluent Release Reports (ARERRs) and comprises several thousand pages of data. The individual plant ARERRs may be viewed in their entirety on the NRC Web site at: <https://www.nrc.gov/reactors/operating/ops-experience/tritium/plant-info.html>.

The purpose of this report is to condense an extremely large volume of technical information into a few tables and figures from which the reader can quickly, if broadly, characterize the effluents from any operating U.S. NPP. These tables and figures are designed to provide easily understandable information for the public at large, while also providing experienced professionals with enough information to evaluate trends in industry performance and to identify potential performance issues for individual power plants. Those users wanting more extensive and detailed information are encouraged to retrieve the original ARERRs from the NRC Web site.

1.2 Scope

The NRC uses the information on radioactive releases, along with other information collected during routine inspections of each facility, to ensure NPPs are operated safely within regulatory requirements. One of those requirements includes maintaining radiation doses from radioactive effluents “as low as is reasonably achievable” (ALARA). Information on solid radioactive waste is not included in this report; however, data on solid waste disposed in licensed waste disposal facilities is available from the Department of Energy’s (DOE’s) Manifest Information Management System (MIMS) database at URL: <https://mims.doe.gov/>.

This report summarizes data from the 96 NPPs in commercial operation between January 1, 2019 and December 31, 2019. The list of NPPs included in this report is provided in Table 1.1. During 2019, only two types of reactors were in commercial power operation in the United States: 1) boiling-water reactors (BWRs) and 2) pressurized-water reactors (PWRs). Nuclear reactors that are not used for commercial power production or are of an experimental design for research are not included in this list and are not included in this report.

Table 1.1 Operating Nuclear Power Plants, 2019

Plant Name	Type	Full Plant Name	Location
Arkansas 1, 2	PWR	Arkansas Nuclear One (ANO), Units 1, 2	London, AR
Beaver Valley 1, 2	PWR	Beaver Valley, Units 1, 2	Shippingport, PA
Braidwood 1, 2	PWR	Braidwood Generating Station, Units 1, 2	Braceville, IL
Browns Ferry 1, 2, 3	BWR	Browns Ferry Nuclear Plant, Units 1, 2, 3	Athens, AL
Brunswick 1, 2	BWR	Brunswick Steam Electric Plant, Units 1, 2	Southport, NC
Byron 1, 2	PWR	Byron Generating Station, Units 1, 2	Byron, IL
Callaway	PWR	Callaway Plant, Unit 1	Fulton, MO
Calvert Cliffs 1, 2	PWR	Calvert Cliffs Nuclear Power Plant, Units 1, 2	Lusby, MD
Catawba 1, 2	PWR	Catawba Nuclear Station, Units 1, 2	York, SC
Clinton	BWR	Clinton Power Station	Clinton, IL
Columbia	BWR	Columbia Station	Benton County, WA
Comanche Peak 1, 2	PWR	Comanche Peak Steam Electric Station, Units 1, 2	Glen Rose, TX
Cook 1, 2	PWR	Donald C. Cook Nuclear Plant, Units 1, 2	Bridgman, MI
Cooper	BWR	Cooper Nuclear Station	Brownville, NE
Davis-Besse	PWR	Davis-Besse Nuclear Power Station, Unit 1	Oak Harbor, OH
Diablo Canyon 1, 2	PWR	Diablo Canyon, Units 1, 2	Avila Beach, CA
Dresden 2, 3	BWR	Dresden Generating Station, Units 2, 3	Morris, IL
Duane Arnold	BWR	Duane Arnold Energy Center	Palo, IA
Farley 1, 2	PWR	Joseph M. Farley Nuclear Plant, Units 1, 2	Columbia, AL
Fermi 2	BWR	Fermi 2 Nuclear Power Plant	Newport, MI
FitzPatrick	BWR	James A. FitzPatrick Nuclear Power Plant	Scriba, NY
Ginna	PWR	R.E. Ginna Nuclear Power Plant, Unit 1	Ontario, NY
Grand Gulf	BWR	Grand Gulf Nuclear Station, Unit 1	Port Gibson, MS
Harris	PWR	Shearon Harris Nuclear Power Plant, Unit 1	New Hill, NC
Hatch 1, 2	BWR	Edwin I. Hatch Nuclear Plant, Units 1, 2	Baxley, GA
Hope Creek	BWR	Hope Creek Generating Station, Unit 1	Hancocks Bridge, NJ
Indian Point 2, 3	PWR	Indian Point Energy Center, Units 2, 3	Buchanan, NY
LaSalle 1, 2	BWR	LaSalle County Generating Station, Units 1, 2	Marseilles, IL
Limerick 1, 2	BWR	Limerick Generating Station, Units 1, 2	Limerick, PA
McGuire 1, 2	PWR	McGuire Nuclear Station, Units 1, 2	Huntersville, NC
Millstone 2, 3	PWR	Millstone Power Station, Units 2, 3	Waterford, CT
Monticello	BWR	Monticello Nuclear Generating Plant	Monticello, MN
Nine Mile Point 1, 2	BWR	Nine Mile Point Nuclear Station, Units 1, 2	Scriba, NY

(continued on the following page)

Table 1.1 Operating Nuclear Power Plants, 2019 (continued)

Plant Name	Type	Full Plant Name	Location
North Anna 1, 2	PWR	North Anna Power Station, Units 1, 2	Louisa County, VA
Oconee 1, 2, 3	PWR	Oconee Nuclear Station, Units 1, 2, 3	Seneca, SC
Palisades	PWR	Palisades Nuclear Plant	Covert, MI
Palo Verde 1, 2, 3	PWR	Palo Verde Nuclear Generating Station, Units 1, 2, 3	Wintersburg, AZ
Peach Bottom 2, 3	BWR	Peach Bottom Atomic Power Station, Units 2, 3	Delta, PA
Perry	BWR	Perry Nuclear Power Plant, Unit 1	Perry, OH
Point Beach 1, 2	PWR	Point Beach Nuclear Plant, Units 1, 2	Two Rivers, WI
Prairie Island 1, 2	PWR	Prairie Island Nuclear Generating Plant, Units 1, 2	Welch, MN
Quad Cities 1, 2	BWR	Quad Cities Generating Station, Units 1, 2	Cordova, IL
River Bend	BWR	River Bend Station, Unit 1	St. Francisville, LA
Robinson 2	PWR	H. B. Robinson Steam Electric Plant, Unit 2	Hartsville, SC
Salem 1, 2	PWR	Salem Nuclear Generating Station, Units 1, 2	Hancocks Bridge, NJ
Seabrook	PWR	Seabrook Station, Unit 1	Seabrook, NH
Sequoyah 1, 2	PWR	Sequoyah Nuclear Plant, Units 1, 2	Soddy-Daisy, TN
South Texas 1, 2	PWR	South Texas Project Electric Generating Station, Units 1, 2	Bay City, TX
St. Lucie 1, 2	PWR	St. Lucie Nuclear Plant, Units 1, 2	Jensen Beach, FL
Summer	PWR	Virgil C. Summer Nuclear Station, Unit 1	Jenkinsville, SC
Surry 1, 2	PWR	Surry Power Station, Units 1, 2	Surry, VA
Susquehanna 1, 2	BWR	Susquehanna Steam Electric Station, Units 1, 2	Salem Township, PA
Turkey Point 3, 4	PWR	Turkey Point Nuclear Plant, Units 3, 4	Homestead, FL
Vogtle 1, 2	PWR	Vogtle Electric Generating Plant, Units 1, 2	Waynesboro, GA
Waterford 3	PWR	Waterford Steam Electric Station, Unit 3	Killona, LA
Watts Bar 1, 2	PWR	Watts Bar Nuclear Plant, Units 1, 2	Spring City, TN
Wolf Creek	PWR	Wolf Creek Generating Station, Unit 1	Burlington, KS

As noted, only nuclear power plants operating during the entire calendar year 2019 are included in this report. For clarity purposes, Table 1.2 contains a list of commercial power plants (BWRs and PWRs) that have permanently shut down and are not included in this report. These permanently shut down nuclear power plants are either in the process of decommissioning or have been decommissioned.

Table 1.2 Permanently Shut Down Nuclear Power Plants, 2019

Plant Name	Type	Full Plant Name	Location	Shut Down
Big Rock Point	BWR	Big Rock Point Restoration Project	Charlevoix, MI	08/29/1997
Crystal River 3	PWR	Crystal River, Unit 3	Crystal River, FL	02/20/2013
Dresden 1*	BWR	Dresden Generating Station, Unit 1	Morris, IL	10/31/1978
Ft. Calhoun	PWR	Ft. Calhoun Station, Unit 1	Ft. Calhoun, NE	10/24/2016
Haddam Neck	PWR	Haddam Neck Nuclear Plant Site	Haddam Neck, CT	12/05/1996
Humboldt Bay	BWR	Humboldt Bay Power Plant, Unit 3	Eureka, CA	07/02/1976
Indian Point 1*	PWR	Indian Point Energy Center, Unit 1	Buchanan, NY	10/31/1974
Kewaunee	PWR	Kewaunee Power Station	Kewaunee, WI	05/07/2013
La Crosse	BWR	La Crosse Boiling-Water Reactor	Genoa, WI	04/30/1987
Maine Yankee	PWR	Maine Yankee	Bath, ME	12/06/1996
Millstone 1	PWR	Millstone Power Station, Unit 1	Waterford, CT	07/21/1998
Oyster Creek	BWR	Oyster Creek Nuclear Generating Station	Forked River, NJ	09/17/2018
Pilgrim	BWR	Pilgrim Nuclear Power Station, Unit 1	Plymouth, MA	05/31/2019
Rancho Seco	PWR	Rancho Seco, Unit 1	Herald, CA	06/07/1989
San Onofre 1	PWR	San Onofre Nuclear Generating Station, Units 1	San Clemente, CA	11/30/1992
San Onofre 2, 3	PWR	San Onofre Nuclear Generating Station, Units 2, 3	San Clemente, CA	06/12/2013
Three Mile Island 1	PWR	Three Mile Island Nuclear Station, Unit 1	Middletown, PA	09/20/2019
Three Mile Island 2	PWR	Three Mile Island Nuclear Station, Unit 2	Middletown, PA	03/28/1979
Trojan	PWR	Trojan Nuclear Plant, Unit 1	Portland, OR	11/09/1992
Vermont Yankee	BWR	Vermont Yankee Nuclear Plant, Unit 1	Vernon, VT	12/29/2014
Yankee Rowe	PWR	Yankee Nuclear Power Station	Franklin Co., MA	10/01/1991
Zion 1	PWR	Zion Generating Station, Units 1	Warrenville, IL	02/21/1997
Zion 2	PWR	Zion Generating Station, Units 2	Warrenville, IL	09/19/1996

** These reactor units have permanently shut down but are co-located on site with operating reactor units. For these units, the licensee reported the sum of the effluents from operating and non-operating units in one report. Therefore, any potential effluents from the non-operating units are included in the release amounts for the operating units in this report.*

For a list of permanently shut down NRC-licensed power reactors and their current decommissioning status, visit the NRC Web site at <https://www.nrc.gov/info-finder/decommissioning/power-reactor>. A more comprehensive list of other nuclear facilities (i.e., Complex Materials Sites, Research and Test Reactors, Uranium Recovery Sites, and Fuel Cycle Facilities) that are in the process of decommissioning can be obtained from the NRC Web site at: <https://www.nrc.gov/waste/decommissioning.html>.

Please note that Figures 3.15 and 3.16, which depict the long-term trend of radioactive effluents, include effluent data only from reactors that were in commercial power operation for the full year for each of the years shown.

1.3 Source of Data

Each nuclear power plant licensed by the NRC in the United States releases small amounts of radioactive materials to the environment as specified in the licensing documents for the plant. NRC regulations require each NPP to establish and maintain a program for monitoring radioactive effluents (per Title 10 of the *Code of Federal Regulations* [CFR] Part 50.36a and 10 CFR Part 50, Appendix I, Section IV.B) and to report these effluents in an Annual Radioactive Effluent Release Report (ARERR) (per 10 CFR 50.36a) (Ref. [1]). In accordance with the regulatory framework, licensees submit their reports to the NRC in a format outlined by Regulatory Guide (RG) 1.21 (Ref. [2]), or an equivalent format.

The information included in this report was obtained from the licensees' ARERRs. Individual licensee reports are available through the NRC Public Document Room, One White Flint North, 11555 Rockville Pike (first floor), Rockville, Maryland 20852, phone 1-800-397-4209 or 301-415-4737, and directly from the NRC's public Web site at: <https://www.nrc.gov/reactors/operating/ops-experience/tritium/plant-info.html>.

1.4 Limitations of Data

Some NPPs have more than one reactor located at a site. If the licensee reports data separately for each reactor unit, those data are included separately as reported by the licensee. Because some licensees operate more than one reactor on a site with a common radioactive waste processing system, these licensees report total effluents from the site instead of reporting the totals from each reactor. This complicates the task of presenting the effluent information in a manner that allows both (1) a direct comparison of one reactor with another, and (2) a direct comparison of each reactor with NRC ALARA criteria and regulations.

For purposes of this report, the data are reported on a per-reactor basis. For multi-reactor sites where the effluents are from a common radioactive waste system, the effluents are divided equally between the units unless additional detail is reported by the site. For example, Catawba Nuclear Station has two reactors (Unit 1 and Unit 2) with a common radioactive waste processing system. For this report, the total effluents for Catawba were split equally between Unit 1 and Unit 2. For other multi-reactor sites, the effluent activity is not always divided equally between the reactors. For example, in the case of Beaver Valley, the licensee reports gaseous effluents from four sources: Unit 1, Unit 2, a common plant vent, and a common building vent. In this case, the releases from the common vents are split equally between Unit 1 and Unit 2, and the totals for each reactor are then calculated. This method of splitting the data has been applied to radionuclide activity data and radiation dose data at some multi-reactor sites. The affected NPPs and the type of data affected are listed in Table 1.3.

Although there are other methods of reporting effluent data (e.g., on the basis of thermal or electrical power generation), the per reactor basis (1) is most intuitive, (2) is most directly comparable with the NRC-required design objectives and limiting conditions for operation (i.e., referred to as ALARA criteria in this report), and (3) is easily derived from the effluent data supplied by the licensee. This approach satisfies a primary objective for this report which is to allow the reader to quickly formulate reasonable comparisons between reactors and the regulatory limits. It should be noted, however, that for some multi-reactor sites, the actual contributions from each reactor might be different than the equal distributions calculated with this approach, such as when a plant is undergoing a major or extended outage.

This report may include licensees' corrections submitted to the NRC up to the time of publication of this report. If a licensee submits amended data after publication of this report in accordance with NRC regulatory guidance, this report will not be updated. For the most current data, the reader should use the individual NPPs' ARERRs which are available on the NRC Web site.

Table 1.3 Reactors for Which the NRC Has Normalized Data on a per Reactor Basis

Boiling-Water Reactors (BWRs)	R*	D*
Browns Ferry 1, 2, 3	✓	✓
Brunswick 1, 2	✓	✓
LaSalle 1, 2	✓	✓
Limerick 1, 2	✓	✓
Peach Bottom 2, 3	✓	✓
Quad Cities 1, 2	✓	✓
Susquehanna 1, 2	✓	

Pressurized-Water Reactors (PWRs)	R*	D*
Beaver Valley 1, 2	✓	
Braidwood 1, 2	✓	✓
Calvert Cliffs 1, 2	✓	✓
Catawba 1, 2	✓	✓
Comanche Peak 1, 2	✓	✓
Cook 1, 2	✓	✓
Diablo Canyon 1, 2	✓	✓
McGuire 1, 2	✓	✓
North Anna 1, 2	✓	✓
Oconee 1, 2, 3	✓	✓
Point Beach 1, 2	✓	✓
Prairie Island 1, 2	✓	✓
Sequoyah 1, 2	✓	✓
Surry 1, 2	✓	✓

Notes:

*R = Radionuclide Data, *D = Dose Data

2 DESCRIPTION OF THE DATA

2.1 Introduction

Radioactive materials may be disposed of in one of three physical forms: solid, liquid, or gas. This report summarizes the release of radioactive materials in gaseous and liquid effluents from operating nuclear power plants. Note: Data on solid radioactive waste shipped from a nuclear power plant site is provided in each licensee's ARERR, and data on solid waste disposed in licensed waste disposal facilities is available from the MIMS database at URL: <https://mims.doe.gov/>.

As described in Section 1.3, owners and operators of NPPs are required to report the release of radioactive effluents from their facilities to the NRC. The two basic characteristics most often used to describe radioactive effluents are: the amount of radioactivity (curies or millicuries) and radiation dose (mrem). Radioactivity will be referred to as "activity" and radiation dose will simply be referred to in this document as "dose."

For this report, activity can be thought of as the amount of radioactive material present in radioactive effluents. The units for measuring activity are further described in Section 2.2. The activities of various radionuclides in radioactive effluents from NPPs are presented in Sections 3.1 through 3.5.

Although the amount of activity is an important, inherent characteristic that helps to describe radioactive effluents, it is not—by itself—a good indicator of the potential health effects from exposure to the radiation. Health effects are dependent on many factors, such as the radionuclide, the activity of the radionuclide, the type of radiation emitted by the radionuclide, the energy of the radiation, the uptake of the radionuclide into the human body, and the metabolism of the radionuclide by the human body. To properly describe the potential health effects from exposure to radioactive materials, a combined measure of risk (i.e., dose) that accounts for all of these differences is needed.

The units for measuring dose (mrem) are described in more detail in Section 2.3. The methods and models for calculating dose from radioactive effluents are discussed in Section 2.4. The actual dose values due to radioactive effluents from NPPs are presented in Section 3.6.

Radiation is around us all of the time. The human body—each of us—contains some natural radioactive materials such as radioactive carbon and radioactive potassium. Natural radioactive materials are also in rocks, in soil, in the air we breathe, and in the food we eat. As a result, humans have been exposed to radiation since the dawn of man. Over the last 100 years, man has developed new radioactive materials and new machines that create additional sources of radiation. These new sources include radioactive materials used in medicine, research, industry, and NPPs. Section 2.5 contains basic information on the doses received by the average member of the U.S. population each year from all sources of radiation, including commercial NPPs.

2.2 Measuring Radioactivity in Radioactive Effluents

In order to present the gaseous and liquid effluent data in a manner that is both useful and concise, only significant radionuclides are included in the tables and figures in this report. Using the guidance in Revision 2 of RG 1.21 (Ref. [2]), licensees evaluate radionuclides that have either a significant activity or a significant dose contribution in NPP effluents. The radionuclides chosen for inclusion in this report are shown in Tables 2.1 and 2.2.

Activity is a measure of the number of atoms that transform (historically referred to as decay) in a given period of time and is reported in various units, normally either curies (Ci) or becquerels (Bq). In the United States, the traditional unit for reporting activity is the Ci. One Ci is equal to 37,000,000,000 (37 billion) radioactive atoms transforming in one second. In this document, activity will be reported as curies and millicuries (mCi). A curie is equal to one thousand millicuries. In countries that have adopted the International System of Units (or SI units), activity is reported in units of Bq. One Bq is one atomic transformation per second. One curie equals 37,000,000,000 becquerels, which may be expressed in scientific notation as 3.7E+10 becquerels or 3.7×10^{10} becquerels. One curie is sometimes expressed as 37 gigabecquerels or simply 37 GBq.

One curie of cobalt-60 and one curie of hydrogen-3 (tritium) have the same activity; however, when an atom of cobalt-60 transforms, the atomic transformations typically produce one moderately energetic beta particle and two gamma rays. By contrast, when an atom of hydrogen-3 transforms, it emits a single, low-energy beta particle. Sensitive instruments can detect and measure the transformation products that are unique to each radionuclide. Cobalt and hydrogen are just two examples of elements that can be radioactive. Other examples are shown in Tables 2.1 and 2.2.

The reporting of radionuclides in gaseous and liquid wastes is commonly grouped into categories (Ref. [2]). These categories are described in Tables 2.1 and 2.2 as noble gases, iodines, particulates, tritium, carbon, and gross alpha activity. Each category contains one or more radionuclides.

Table 2.1 Radionuclides in Gaseous Effluents

Gaseous Effluent Category	Common Radionuclides	Significant Radionuclides
Fission and Activation Gases (sometimes referred to as Noble Gases)	Krypton (85, 85m, 87, 88) Xenon (131, 131m, 133, 133m, 135, 135m) Argon (41)	Kr-85 Xe-133 Xe-135 All (Sections 3.2, 3.3, and 3.6)
Iodines	Iodine (131, 132, 133, 134, 135)	I-131 All (Section 3.6)
Particulates	Cobalt (58, 60) Cesium (134, 137) Chromium (51) Manganese (54) Niobium (95)	Co-58 Co-60 Cs-134 Cs-137 All (Section 3.6)
Tritium	Hydrogen (3)	H-3
Carbon	Carbon (14)	C-14
Gross Alpha	Total alpha activity	*Not Presented in this Report

**Gross alpha is rarely released in radioactive effluents, therefore, the following tables do not report alpha releases. For further information on alpha releases, please refer to the individual ARERRs.*

The radionuclides listed in this report are the most significant radionuclides discharged from a site. For example, although Table 2.1 lists 11 radionuclides in the category called “fission and activation gases,” only the three most significant radionuclides (Kr-85, Xe-133, and Xe-135) were selected for inclusion in Table 3.1 and Figure 3.1 for noble gas radionuclides. These three were chosen because these radionuclides are the most significant, are representative of the overall effluent releases, and because as their activities increase, the activities of other fission and

activation gases typically increase as well. Conversely, if the activities of these three radionuclides are very low, the activities of other fission and activation gases also tend to be low. All noble gas radionuclides are included in Sections 3.2 Short-Term Trend in Gaseous Effluents, 3.3 Long-Term Trend in Gaseous Effluents, and 3.6 Radiation Doses from Gaseous and Liquid Effluents.

Table 2.2 Radionuclides in Liquid Effluents

Liquid Effluent Category	Common Radionuclides	Significant Radionuclides
Mixed Fission and Activation Products	Iron (55)	Fe-55
	Cobalt (58, 60)	Co-58
	Cesium (134, 137)	Co-60
	Chromium (51)	Cs-134
	Manganese (54)	Cs-137
	Zirconium (95)	I-131
	Niobium (95)	All (Sections 3.4, 3.5 and 3.6)
	Iodine (131, 133, 135)	
Tritium	Hydrogen (3)	H-3
Dissolved and Entrained Noble Gases	Krypton (85, 85m, 87, 88) Xenon (131, 133, 133m, 135, 135m)	Not Presented in this Report
Gross Alpha	Total alpha activity	Not Presented in this Report

Information related to the operation of plant systems can be inferred from the radionuclides present in radioactive effluents (e.g., the effectiveness of waste processing equipment). Additionally, the ratios of the activities of radionuclides can provide insights into fuel integrity, radioactive waste system operation, and general radioactive waste handling practices at a site. The reader who is interested in seeing the activities of all radionuclides released from any particular NPP is encouraged to review the detailed, site-specific ARERRs provided on the NRC Web site.

Laboratory instruments are used to identify radionuclides and the amount of activity present in radioactive effluents. Although activity measures the rate of atomic transformations, it does not provide a direct measure of the potential health effects from exposure to radionuclides. When discussing potential health effects, the concept of dose is used. Radiation dose is discussed in more detail in the following paragraphs.

2.3 Dose Units and Limits

Radiation dose is a measure of the amount of radiation absorbed by the human body and its biological impact. The traditional unit for reporting radiation dose in the United States is the rem. Small exposures are often reported as millirem (mrem) or as fractions of a mrem. One thousand mrem equals one rem. Other countries report radiation dose in units of sieverts (Sv). One sievert equals 100 rem. One millirem equals 0.00001 sievert or 0.01 millisievert (mSv). The number 0.00001 can be represented in scientific notation as 1×10^{-5} or 1E-05.

Radioactive effluents discharged from NPPs are controlled by regulations. NRC regulations (10 CFR 20.1301) specify that the annual dose to individual members of the public does not exceed 100 mrem (1 millisievert) (Ref. [3]). In addition, the Environmental Protection Agency (EPA) has established environmental radiation protection standards for nuclear power operations that the annual dose to any member of the public does not exceed 25 mrem to the whole body, 75 mrem to the thyroid, and 25 mrem to any other organ.

Typically, the median dose from radioactive effluents to members of the public is so low (usually less than 1 mrem in a year) that the radionuclides and the dose in the environment cannot be measured directly. Nevertheless, hypothetical doses to potential members of the public are typically calculated based on the measurements of radioactive effluents at the point of release from the plant.

2.4 Radiation Dose to the Public

Licensees are required by 10 CFR 50.36a to establish Technical Specifications which require that operating procedures for the control of effluents be established and followed, and that the radioactive waste system be maintained and used to keep average annual effluent releases at small percentages of the public dose limits (Ref. [1]). The Technical Specifications establish the licensee's Radioactive Effluent Controls Program and the Radiological Environmental Monitoring Program, which are used to ensure plant operations keep radioactive effluent releases ALARA and meet the ALARA criteria in 10 CFR Part 50, Appendix I (Ref. [1]). The ALARA criteria are established as a small fraction (typically about 3 percent) of the NRC safety limits for dose to members of the public.

The licensee is required to keep levels of radioactive material in effluents ALARA, even under unusual operating conditions. The ALARA criteria are design objectives and limiting conditions for operation, not safety limits. If releases ever exceed design objectives, the licensee is required to take corrective actions to ensure the plant systems are functioning as designed and to report this information to the NRC.

The plant's license includes Technical Specifications which require licensees to establish a Radioactive Effluent Controls Program in the Offsite Dose Calculation Manual (ODCM) (or equivalent), and to control radioactive effluents in a manner such as to keep doses to members of the public from radioactive effluents ALARA. The methods of determining dose are described in the licensee's ODCM. The ODCMs are available through the NRC Public Document Room. Any changes to the ODCM are reported to the NRC and are provided in the licensee's ARERR. The licensee's Technical Specifications also require that an ARERR be submitted to the NRC on an annual basis.

The ODCM contains both the offsite dose calculation methodologies and a Radiological Environmental Monitoring Program. Those dose calculations are based on:

- actual measurements of the radioactive materials discharged to the unrestricted area;
- how radionuclides are dispersed and diluted in the environment;
- how radionuclides are incorporated into animals, plants, and soil; and
- biokinetic models of human uptake and metabolism of radioactive materials.

The dose calculation models are designed to calculate the dose either to a real individual close to the NPP or conservatively to a hypothetical individual exposed to the highest concentrations of radioactive materials from radioactive effluents. This person is often referred to as the maximum exposed individual (or maximum exposed hypothetical individual). The parameters and assumptions used in these dose calculations typically include conservative assumptions that tend to overestimate the dose. As a result, the actual doses received by real individuals are often much less than those calculated. Guidance for these calculations is provided in NRC RG 1.109 (Ref. [4]).

The doses calculated by a licensee are reported in the NPP's ARERRs. Summaries of these calculated doses are provided in this report in Tables 3.19 through 3.22, and are shown graphically in Figures 3.17 through 3.22.

2.5 Other Sources of Radiation Dose to the U.S. Population

In the previous sections, doses from radioactive effluents to maximally exposed (real or hypothetical) individuals living very close to a NPP were discussed. This section discusses the doses that the average American typically receives each year from naturally occurring background radiation and all other sources of radiation. With the information presented in this section, the reader can compare the doses received from NPP effluents with the doses received from natural, medical, and other sources of radiation. This comparison provides some context to the concept of radiation dose effects.

In March 2009, the National Council on Radiation Protection and Measurements (NCRP) published Report No. 160 as an update to the 1987 NCRP Report No. 93, "Ionizing Radiation Exposure of the Population of the United States" (Refs. [5] , [6]). Report No. 160 describes the doses to the U.S. population from all sources of ionizing radiation for 2006, the most recent data available at the time the NCRP report was written. The NCRP report also includes information on the variability of those doses from one individual to another. The NCRP estimated that the average person in the United States receives about 620 mrem of radiation dose each year from all sources (i.e., both natural background radiation and man-made radiation sources). NCRP Report No. 160 describes each of the sources of radiation that contribute to this dose, including:

- naturally occurring sources (natural background) such as cosmic radiation from space, terrestrial radiation from radioactive materials in the earth, and naturally occurring radioactive materials in the food people eat and in the air people breathe;
- medical sources from diagnosis and treatment of health disorders using radioactive pharmaceuticals and radiation-producing equipment;
- consumer products (such as household smoke detectors);
- industrial processes, security devices, educational tools, and research activities; and
- exposure of workers that result from their occupations.

Figure 2.1 is a pie chart showing the relative contributions of these sources of radiation to the dose received by the average person. Larger contributors to dose are represented by proportionally larger slices of the pie. Doses to the public from NPPs are included in the industrial category; while doses to workers from nuclear power generation are included in the category of occupational dose.

Doses to the public due to effluents from NPPs are less than 0.1 percent (one-tenth of one percent) of what the average person receives each year from all sources of radiation. Doses to workers from occupational exposures, including those received from work at NPPs, also are less than 0.1 percent of the dose to members of the public from all sources.

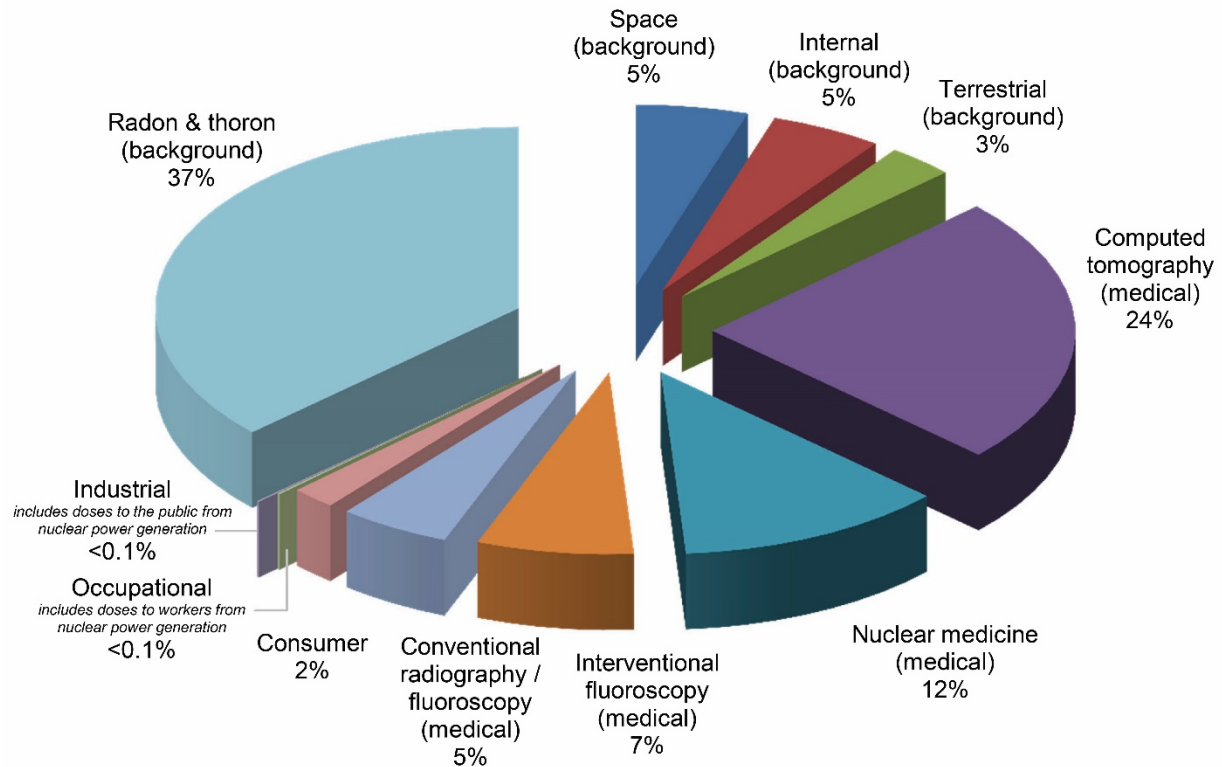


Figure 2.1 Sources of Radiation Exposure to the U.S. Population

The chart above shows the contribution of various sources of exposure to the total collective dose and the total dose per individual in the U.S. population for 2006. Values have been rounded to the nearest 1%, except for those <1% [less than 1%]. *Credit: Modification to image courtesy of National Council on Radiation Protection and Measurements.*

3 EFFLUENT DATA

3.1 Radioactive Materials in Gaseous and Liquid Effluents

The amount of activity of the most significant radionuclides discharged in gaseous and liquid effluents in 2019 are shown in Tables 3.1 through 3.14. The data from these tables are illustrated graphically in Figures 3.1 through 3.14. The tables and figures are organized by the two types of reactors used in the United States: boiling-water reactors (BWRs) and pressurized-water reactors (PWRs). The tables and figures are further subdivided into gaseous and liquid effluents. Finally, the data are subdivided into the radionuclide categories (common radionuclides and significant radionuclides) as listed in Tables 2.1 and 2.2. These tables and figures allow a detailed comparison of each reactor's effluents with other reactors of the same type.

The amount of activity (curies) discharged from the most significant radionuclides are included in the tables and graphs in Section 3.1. In addition, the radiation dose from all radionuclides discharged from the reactors is included in Section 3.6, "Radiation Doses from Gaseous and Liquid Effluents."

For comparison between plants, median values are included in some tables and figures. The median is the midpoint of the data such that half of the power plants will have greater activity and dose values than the median plant and half of the power plants will have values equal to or lower than the median plant. The use of a median value is a method of estimating a central or typical value while avoiding bias caused by extremely high or low values in the data set. All operating nuclear plant reactors are included when calculating the medians, even those reactors for which no measurable release of a particular radionuclide is reported.

All licensees are required to have and use sensitive radioactive effluent measurement capabilities. Many times, radioactive effluent releases are so low in concentration that a release cannot be detected. If no value is listed for a particular radionuclide in a table, it is because the licensee reported that the radionuclide was not detected. Blanks in data fields are generally used instead of zeros in order to make the tables and figures easier for the reader to quickly identify the positive values.

On the following pages, the tables are presented first. In general, the information in each table is organized in descending order of activity. The facilities discharging the most activity are shown near the top of each table, while the facilities discharging the least activity are shown toward the bottom of each table. The median value is shown in the middle of each data set. Tables with information on more than one radionuclide are listed by the total activity per reactor, in descending order.

The figures are shown following the tables. In general, the information is organized in each figure in descending order of activity. The facilities discharging the most activity of the selected radionuclides are shown near the top of the figure, while the facilities discharging the least activity of the radionuclides are shown toward the bottom of each figure. The median value is shown in the middle of each data set.

Figures with information on more than one radionuclide are listed by the total activity per reactor, in descending order of activity. Figures with information on more than one radionuclide are shown in multi-colored graphs (e.g., Figure 3.1). In figures with multi-colored graphs, the total activity of the selected radionuclides is shown on the right side of the graph, while the relative contribution of each radionuclide to the total activity is shown on the left side of the graph. The relative contributions of each nuclide are shown—in multiple colors—as a percent of the total activity. A multi-colored graph allows the reader to compare not only the activity but also the relative amounts

of significant radionuclides released by the various reactors. Multi-colored graphs contain two separate scales of measurement. The total activity is shown on a logarithmic scale, while the radionuclide percentages of the total activity are shown on a linear scale.

Table 3.1 BWR Gaseous Releases — Fission and Activation Gases, 2019
Shown in Descending Order of Total Activity

BWR Facility	Kr-85 (Ci)	Xe-133 (Ci)	Xe-135 (Ci)	Total (Ci)
Grand Gulf		2.17E+02	3.81E+01	2.55E+02
Dresden 2		7.56E+01	1.72E+02	2.47E+02
River Bend	1.49E-02	4.61E+01	9.87E+01	1.45E+02
Brunswick 1	7.16E+00	4.08E+01	3.63E+01	8.42E+01
Brunswick 2	7.16E+00	4.08E+01	3.63E+01	8.42E+01
Monticello		5.17E+01	2.16E+01	7.33E+01
Peach Bottom 2		6.48E+01	7.06E+00	7.18E+01
Peach Bottom 3		6.48E+01	7.06E+00	7.18E+01
Nine Mile Point 2		5.58E+01		5.58E+01
LaSalle 1		8.55E+00	1.39E+01	2.24E+01
LaSalle 2		8.55E+00	1.39E+01	2.24E+01
Dresden 3	1.87E-04	2.71E+00	1.61E+01	1.89E+01
Hope Creek		1.55E+00	9.44E+00	1.10E+01
Browns Ferry 1		9.74E+00	5.24E-01	1.03E+01
Browns Ferry 2		9.74E+00	5.24E-01	1.03E+01
Browns Ferry 3		9.74E+00	5.24E-01	1.03E+01
BWR Median Release	0.00E+00	2.51E+00	9.77E-01	9.13E+00
Clinton		6.71E+00	1.28E+00	7.99E+00
Limerick 1	2.38E-01	1.44E+00	1.61E+00	3.28E+00
Limerick 2	2.38E-01	1.44E+00	1.61E+00	3.28E+00
FitzPatrick		2.31E+00	4.78E-01	2.79E+00
Quad Cities 1		1.40E+00	6.78E-01	2.08E+00
Quad Cities 2		1.40E+00	6.78E-01	2.08E+00
Cooper		8.83E-02	1.28E+00	1.36E+00
Fermi 2			2.77E-03	2.77E-03
Columbia				
Duane Arnold				
Hatch 1				
Hatch 2				
Nine Mile Point 1				
Perry				
Susquehanna 1				
Susquehanna 2				

Table 3.2 BWR Gaseous Releases — Iodine, 2019
Shown in Descending Order of Activity

BWR Facility	I-131 (Ci)	BWR Facility	I-131 (Ci)
River Bend	1.91E-02	BWR Median Release	2.89E-04
LaSalle 1	1.09E-02	Dresden 3	2.79E-04
LaSalle 2	1.09E-02	Columbia	2.20E-04
Brunswick 1	5.81E-03	Hope Creek	2.13E-04
Brunswick 2	5.81E-03	Nine Mile Point 2	1.42E-04
Monticello	3.17E-03	Clinton	9.68E-05
Dresden 2	1.29E-03	FitzPatrick	9.13E-05
Fermi 2	7.87E-04	Perry	8.73E-05
Peach Bottom 2	5.71E-04	Cooper	3.51E-05
Peach Bottom 3	5.71E-04	Hatch 1	1.42E-05
Grand Gulf	5.03E-04	Hatch 2	1.42E-05
Browns Ferry 1	4.81E-04	Duane Arnold	1.38E-05
Browns Ferry 2	4.81E-04	Nine Mile Point 1	1.22E-05
Browns Ferry 3	4.81E-04	Limerick 1	
Quad Cities 1	2.98E-04	Limerick 2	
Quad Cities 2	2.98E-04	Susquehanna 1	
		Susquehanna 2	

Table 3.3 BWR Gaseous Releases — Particulates, 2019
Shown in Descending Order of Total Activity

BWR Facility	Co-58 (Ci)	Co-60 (Ci)	Cs-134 (Ci)	Cs-137 (Ci)	Total (Ci)
LaSalle 1	4.57E-04	2.14E-03			2.59E-03
LaSalle 2	4.57E-04	2.14E-03			2.59E-03
Nine Mile Point 1	1.40E-04	1.21E-03		4.19E-05	1.39E-03
Columbia	2.03E-04	8.65E-04			1.07E-03
Nine Mile Point 2		1.05E-03		3.52E-06	1.05E-03
Dresden 2	2.74E-05	6.74E-04			7.02E-04
Quad Cities 1	1.60E-05	6.80E-04		4.72E-06	7.00E-04
Quad Cities 2	1.60E-05	6.80E-04		4.72E-06	7.00E-04
Monticello	2.35E-05	2.83E-04	1.93E-06	1.56E-04	4.65E-04
Brunswick 1	2.58E-05	3.98E-04		6.60E-06	4.30E-04
Brunswick 2	2.58E-05	3.98E-04		6.60E-06	4.30E-04
Peach Bottom 2	1.84E-07	3.79E-04		2.01E-07	3.79E-04
Peach Bottom 3	1.84E-07	3.79E-04		2.01E-07	3.79E-04
Browns Ferry 1	1.14E-05	1.41E-04		1.77E-05	1.70E-04
Browns Ferry 2	1.14E-05	1.41E-04		1.77E-05	1.70E-04
Browns Ferry 3	1.14E-05	1.41E-04		1.77E-05	1.70E-04
BWR Median Release	5.60E-06	1.30E-04	0.00E+00	2.72E-12	1.48E-04
Dresden 3	6.04E-06	1.20E-04		5.44E-12	1.26E-04
River Bend	1.26E-05	7.69E-05			8.95E-05
Grand Gulf	3.98E-05	3.60E-05			7.58E-05
Fermi 2		7.01E-05			7.01E-05
Hope Creek		5.38E-05			5.38E-05
Cooper	2.02E-07	4.59E-05		1.87E-06	4.80E-05
Susquehanna 1	5.15E-06	3.50E-05			4.02E-05
Susquehanna 2	5.15E-06	3.50E-05			4.02E-05
Limerick 1	2.16E-06	1.27E-05			1.48E-05
Limerick 2	2.16E-06	1.27E-05			1.48E-05
Clinton	3.00E-06	1.02E-05			1.32E-05
Duane Arnold	4.12E-06	4.62E-06			8.74E-06
Hatch 1	1.88E-08	1.39E-06		2.37E-08	1.43E-06
Hatch 2	7.51E-08	7.92E-07		2.37E-08	8.91E-07
FitzPatrick					
Perry					

Table 3.4 BWR Gaseous Releases — Tritium, 2019
Shown in Descending Order of Activity

BWR Facility	H-3 (Ci)	BWR Facility	H-3 (Ci)
Hope Creek	3.84E+02	BWR Median Release	3.72E+01
Browns Ferry 1	2.42E+02	Peach Bottom 2	3.72E+01
Browns Ferry 2	2.42E+02	Peach Bottom 3	3.72E+01
Browns Ferry 3	2.42E+02	LaSalle 1	3.58E+01
Nine Mile Point 2	1.58E+02	LaSalle 2	3.58E+01
Susquehanna 1	9.01E+01	Clinton	3.00E+01
Susquehanna 2	9.01E+01	Duane Arnold	2.87E+01
Brunswick 1	8.14E+01	Hatch 2	2.79E+01
Brunswick 2	8.14E+01	Hatch 1	2.42E+01
Fermi 2	4.61E+01	River Bend	2.21E+01
Quad Cities 1	4.35E+01	Grand Gulf	2.15E+01
Quad Cities 2	4.35E+01	Nine Mile Point 1	1.61E+01
Limerick 1	4.32E+01	Columbia	1.50E+01
Limerick 2	4.32E+01	Monticello	1.40E+01
Dresden 2	3.88E+01	FitzPatrick	1.35E+01
		Dresden 3	1.06E+01
		Cooper	9.23E+00
		Perry	1.38E+00

Table 3.5 BWR Gaseous Releases — Carbon-14, 2019
Shown in Descending Order of Activity

BWR Facility	C-14 (Ci)	BWR Facility	C-14 (Ci)
Susquehanna 1	2.36E+01	BWR Median Release	1.56E+01
Susquehanna 2	2.36E+01	Clinton	1.54E+01
Nine Mile Point 2	1.99E+01	Hope Creek	1.50E+01
Peach Bottom 2	1.95E+01	Dresden 2	1.46E+01
Peach Bottom 3	1.95E+01	Dresden 3	1.43E+01
Browns Ferry 1	1.81E+01	Quad Cities 1	1.43E+01
Browns Ferry 2	1.81E+01	Quad Cities 2	1.43E+01
Browns Ferry 3	1.81E+01	Hatch 1	1.42E+01
Fermi 2	1.76E+01	Hatch 2	1.42E+01
LaSalle 1	1.74E+01	Cooper	1.22E+01
LaSalle 2	1.74E+01	River Bend	1.10E+01
Limerick 1	1.69E+01	FitzPatrick	1.07E+01
Limerick 2	1.69E+01	Brunswick 1	1.06E+01
Grand Gulf	1.63E+01	Brunswick 2	1.06E+01
Columbia	1.58E+01	Duane Arnold	9.61E+00
Perry	1.58E+01	Nine Mile Point 1	8.00E+00
		Monticello	7.45E+00

Table 3.6 PWR Gaseous Releases — Fission and Activation Gases, 2019
Shown in Descending Order of Total Activity

PWR Facility	Kr-85 (Ci)	Xe-133 (Ci)	Xe-135 (Ci)	Total (Ci)
Vogtle 1		1.50E+02	2.27E-02	1.50E+02
Palisades	2.24E-02	2.39E+00	1.41E+00	3.82E+00
Calvert Cliffs 1	3.84E-01	2.77E+00	1.20E-01	3.28E+00
Calvert Cliffs 2	3.84E-01	2.77E+00	1.20E-01	3.28E+00
Oconee 1		2.63E+00	4.67E-03	2.64E+00
Oconee 2		2.63E+00	4.67E-03	2.64E+00
Oconee 3		2.63E+00	4.67E-03	2.64E+00
North Anna 1	1.42E+00	3.73E-01	6.12E-04	1.79E+00
North Anna 2	1.42E+00	3.73E-01	6.12E-04	1.79E+00
Vogtle 2		1.62E+00	2.84E-02	1.65E+00
Wolf Creek	1.31E+00	2.39E-03		1.31E+00
South Texas 2		1.28E+00		1.28E+00
St. Lucie 1		1.26E+00	3.75E-03	1.26E+00
Catawba 1	5.69E-02	9.18E-01	8.47E-02	1.06E+00
Catawba 2	5.69E-02	9.18E-01	8.47E-02	1.06E+00
Watts Bar 1	2.57E-06	8.02E-01	1.02E-01	9.05E-01
Farley 2		7.20E-01		7.20E-01
St. Lucie 2		7.09E-01	3.57E-03	7.12E-01
South Texas 1		6.78E-01		6.78E-01
Millstone 3	6.61E-01	8.09E-04	3.75E-03	6.66E-01
Ginna		5.61E-01		5.61E-01
Summer		2.68E-01	2.03E-01	4.71E-01
Palo Verde 1		3.34E-01	1.53E-04	3.34E-01
Farley 1		2.60E-01	5.25E-02	3.12E-01
Cook 1	8.45E-02	1.73E-01	3.89E-03	2.62E-01
Cook 2	8.45E-02	1.73E-01	3.89E-03	2.62E-01
Palo Verde 3		1.85E-01	9.64E-04	1.86E-01
Diablo Canyon 1		1.05E-01	7.74E-02	1.82E-01
Diablo Canyon 2		1.05E-01	7.74E-02	1.82E-01
Byron 1		1.67E-01	1.29E-03	1.68E-01
Byron 2		1.62E-01	1.59E-03	1.63E-01
Indian Point 3		1.60E-01	1.17E-03	1.61E-01

(continued on the following page)

Table 3.6 PWR Gaseous Releases — Fission and Activation Gases, 2019 (continued)
Shown in Descending Order of Total Activity

PWR Facility	Kr-85 (Ci)	Xe-133 (Ci)	Xe-135 (Ci)	Total (Ci)
PWR Median Release	0.00E+00	1.07E-01	1.49E-03	1.61E-01
Salem 1		1.46E-01	1.39E-02	1.60E-01
Waterford 3		1.31E-01		1.31E-01
Indian Point 2		1.22E-01	1.82E-03	1.24E-01
Beaver Valley 1		1.10E-01	2.57E-03	1.12E-01
Sequoyah 1		1.04E-01	4.25E-03	1.09E-01
Sequoyah 2		1.04E-01	4.25E-03	1.09E-01
Millstone 2	8.55E-04	9.99E-02	6.07E-04	1.01E-01
Braidwood 1		8.74E-02	7.24E-03	9.46E-02
Braidwood 2		8.74E-02	7.24E-03	9.46E-02
Surry 1		6.55E-02	9.00E-05	6.56E-02
Surry 2		6.55E-02	9.00E-05	6.56E-02
Arkansas 2		5.12E-02		5.12E-02
Callaway	1.68E-02	2.61E-02		4.28E-02
McGuire 1		3.58E-02	1.49E-03	3.73E-02
McGuire 2		3.58E-02	1.49E-03	3.73E-02
Point Beach 1		3.73E-02		3.73E-02
Point Beach 2		3.73E-02		3.73E-02
Robinson 2		3.36E-02	5.04E-06	3.36E-02
Watts Bar 2		1.42E-02	1.15E-02	2.57E-02
Salem 2		1.78E-02	4.64E-04	1.82E-02
Arkansas 1	1.03E-02	6.27E-03		1.66E-02
Comanche Peak 1	5.88E-03	4.48E-03	1.24E-03	1.16E-02
Comanche Peak 2	5.88E-03	4.48E-03	1.24E-03	1.16E-02
Turkey Point 3		1.12E-02	1.47E-05	1.13E-02
Turkey Point 4		1.12E-02	1.47E-05	1.13E-02
Beaver Valley 2		5.75E-03	2.57E-03	8.32E-03
Prairie Island 1		5.08E-03	4.64E-06	5.09E-03
Prairie Island 2		5.08E-03	4.64E-06	5.09E-03
Seabrook		3.19E-04	2.45E-03	2.77E-03
Palo Verde 2		2.07E-04	1.18E-04	3.25E-04
Davis-Besse				
Harris				

Table 3.7 PWR Gaseous Releases — Iodine, 2019
Shown in Descending Order of Activity

PWR Facility	I-131 (Ci)	PWR Facility	I-131 (Ci)
Braidwood 1	1.69E-02	PWR Median Release	0.00E+00
Braidwood 2	1.69E-02	Arkansas 1	
Palisades	7.08E-05	Arkansas 2	
Calvert Cliffs 1	6.45E-05	Beaver Valley 1	
Calvert Cliffs 2	6.45E-05	Beaver Valley 2	
Millstone 2	3.52E-05	Byron 1	
Palo Verde 1	3.05E-05	Callaway	
St. Lucie 1	2.27E-05	Catawba 1	
North Anna 1	1.39E-05	Catawba 2	
North Anna 2	1.39E-05	Comanche Peak 1	
Farley 1	8.90E-06	Comanche Peak 2	
Ginna	8.35E-06	Davis-Besse	
Point Beach 1	3.21E-06	Diablo Canyon 1	
Point Beach 2	3.21E-06	Diablo Canyon 2	
Watts Bar 1	2.79E-06	Indian Point 2	
Watts Bar 2	2.65E-06	Indian Point 3	
Cook 1	2.54E-06	McGuire 1	
Cook 2	2.54E-06	McGuire 2	
Salem 1	1.15E-06	Palo Verde 2	
Byron 2	1.06E-06	Prairie Island 1	
St. Lucie 2	9.72E-07	Prairie Island 2	
Farley 2	6.96E-07	Robinson 2	
Palo Verde 3	6.71E-07	Salem 2	
Harris	1.90E-07	Seabrook	
Millstone 3	1.67E-07	Sequoyah 1	
South Texas 2	4.35E-08	Sequoyah 2	
South Texas 1	2.75E-08	Summer	
Vogtle 1	2.19E-08	Surry 1	
Oconee 1	3.93E-09	Surry 2	
Oconee 2	3.93E-09	Turkey Point 3	
Oconee 3	3.93E-09	Turkey Point 4	
		Vogtle 2	
		Waterford 3	
		Wolf Creek	

Table 3.8 PWR Gaseous Releases — Particulates, 2019
Shown in Descending Order of Total Activity

PWR Facility	Co-58 (Ci)	Co-60 (Ci)	Cs-134 (Ci)	Cs-137 (Ci)	Total (Ci)
Palo Verde 1	1.37E-03	6.84E-04			2.06E-03
McGuire 1		2.61E-04		8.50E-07	2.62E-04
McGuire 2		2.61E-04		8.50E-07	2.62E-04
Beaver Valley 1	1.38E-04	4.08E-05			1.79E-04
St. Lucie 1		1.72E-04		4.99E-06	1.77E-04
Vogtle 2	3.33E-05	4.63E-05			7.96E-05
Millstone 3	3.71E-05	1.45E-05			5.16E-05
Palo Verde 3	1.66E-05	1.72E-05			3.38E-05
Watts Bar 1	2.84E-05	2.96E-06			3.14E-05
Watts Bar 2	2.83E-05	2.87E-06			3.12E-05
Turkey Point 4	2.46E-05	5.82E-07			2.52E-05
Salem 1	2.22E-05	3.09E-08			2.22E-05
Diablo Canyon 1	9.00E-06	3.20E-06			1.22E-05
Diablo Canyon 2	9.00E-06	3.20E-06			1.22E-05
North Anna 1	3.72E-06	5.20E-06		1.16E-07	9.03E-06
North Anna 2	3.72E-06	5.20E-06		1.16E-07	9.03E-06
Beaver Valley 2	7.09E-06	1.36E-06			8.45E-06
Surry 1	8.23E-06				8.23E-06
Surry 2	8.23E-06				8.23E-06
Point Beach 1	2.83E-06	1.74E-06			4.57E-06
Point Beach 2	2.83E-06	1.74E-06			4.57E-06
Waterford 3	2.83E-06	3.35E-07			3.17E-06
Palisades	9.83E-07	1.12E-06			2.10E-06
St. Lucie 2		1.36E-06			1.36E-06
Millstone 2		9.96E-07			9.96E-07
South Texas 2	6.06E-07	3.38E-07			9.44E-07
South Texas 1	7.55E-07	1.01E-07			8.56E-07
Turkey Point 3	5.57E-07				5.57E-07
Palo Verde 2		4.48E-07			4.48E-07
Farley 1	1.61E-07	1.69E-07			3.30E-07
Prairie Island 1	2.86E-07				2.86E-07
Prairie Island 2	2.86E-07				2.86E-07
Farley 2	1.05E-07				1.05E-07
Robinson 2	4.92E-08				4.92E-08

(continued on the following page)

Table 3.8 PWR Gaseous Releases — Particulates, 2019 (continued)
Shown in Descending Order of Total Activity

PWR Facility	Co-58 (Ci)	Co-60 (Ci)	Cs-134 (Ci)	Cs-137 (Ci)	Total (Ci)
PWR Median Release	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.95E-07
Arkansas 1					
Arkansas 2					
Braidwood 1					
Braidwood 2					
Byron 1					
Byron 2					
Callaway					
Calvert Cliffs 1					
Calvert Cliffs 2					
Catawba 1					
Catawba 2					
Comanche Peak 1					
Comanche Peak 2					
Cook 1					
Cook 2					
Davis-Besse					
Ginna					
Harris					
Indian Point 2					
Indian Point 3					
Oconee 1					
Oconee 2					
Oconee 3					
Salem 2					
Seabrook					
Sequoyah 1					
Sequoyah 2					
Summer					
Vogtle 1					
Wolf Creek					

Table 3.9 PWR Gaseous Releases — Tritium, 2019
Shown in Descending Order of Activity

PWR Facility	H-3 (Ci)	PWR Facility	H-3 (Ci)
Palo Verde 3	8.16E+02	PWR Median Release	3.58E+01
Palo Verde 1	5.01E+02	Point Beach 1	3.51E+01
Palo Verde 2	3.87E+02	Point Beach 2	3.51E+01
Salem 1	2.37E+02	Summer	3.28E+01
Ginna	1.16E+02	Davis-Besse	3.23E+01
Salem 2	1.09E+02	Robinson 2	2.61E+01
Vogtle 1	9.52E+01	Arkansas 2	2.47E+01
Catawba 1	9.48E+01	Arkansas 1	2.10E+01
Catawba 2	9.48E+01	North Anna 1	2.00E+01
South Texas 1	7.43E+01	North Anna 2	2.00E+01
Wolf Creek	7.15E+01	St. Lucie 1	1.97E+01
Harris	7.03E+01	Watts Bar 1	1.93E+01
Seabrook	6.73E+01	Surry 1	1.92E+01
Beaver Valley 1	6.66E+01	Surry 2	1.92E+01
Beaver Valley 2	6.66E+01	Indian Point 3	1.88E+01
Waterford 3	5.99E+01	Turkey Point 3	1.70E+01
Cook 1	5.34E+01	Prairie Island 1	1.68E+01
Cook 2	5.34E+01	Prairie Island 2	1.68E+01
Oconee 1	5.10E+01	Watts Bar 2	1.68E+01
Oconee 2	5.10E+01	Byron 1	1.47E+01
Oconee 3	5.10E+01	Farley 1	1.41E+01
Millstone 3	5.04E+01	Millstone 2	1.35E+01
South Texas 2	4.40E+01	Palisades	1.30E+01
Vogtle 2	3.94E+01	Comanche Peak 1	1.25E+01
McGuire 1	3.92E+01	Comanche Peak 2	1.25E+01
McGuire 2	3.92E+01	Farley 2	1.17E+01
Byron 2	3.70E+01	Turkey Point 4	1.02E+01
Braidwood 1	3.66E+01	Indian Point 2	8.57E+00
Braidwood 2	3.66E+01	St. Lucie 2	8.54E+00
Diablo Canyon 1	3.66E+01	Sequoyah 1	5.47E+00
Diablo Canyon 2	3.66E+01	Sequoyah 2	5.47E+00
Callaway	3.65E+01	Calvert Cliffs 1	3.95E+00
		Calvert Cliffs 2	3.95E+00

Table 3.10 PWR Gaseous Releases — Carbon-14, 2019
Shown in Descending Order of Activity

PWR Facility	C-14 (Ci)	PWR Facility	C-14 (Ci)
North Anna 1	1.61E+01	PWR Median Release	9.39E+00
North Anna 2	1.61E+01	Surry 1	9.39E+00
Comanche Peak 1	1.26E+01	Surry 2	9.39E+00
Comanche Peak 2	1.26E+01	Farley 1	9.28E+00
Seabrook	1.21E+01	Farley 2	9.28E+00
Vogtle 1	1.21E+01	Diablo Canyon 2	9.20E+00
Vogtle 2	1.21E+01	Salem 1	9.07E+00
St. Lucie 2	1.16E+01	Cook 1	8.96E+00
Callaway	1.14E+01	Cook 2	8.96E+00
Salem 2	1.14E+01	Beaver Valley 1	8.91E+00
Millstone 3	1.12E+01	Beaver Valley 2	8.91E+00
Sequoyah 1	1.08E+01	Robinson 2	8.50E+00
Sequoyah 2	1.08E+01	St. Lucie 1	8.07E+00
Wolf Creek	1.07E+01	Turkey Point 4	7.90E+00
Turkey Point 3	1.06E+01	Harris	7.85E+00
Catawba 1	1.05E+01	Oconee 1	7.84E+00
Catawba 2	1.05E+01	Oconee 2	7.84E+00
Indian Point 2	1.05E+01	Oconee 3	7.84E+00
McGuire 1	1.05E+01	Arkansas 1	7.50E+00
McGuire 2	1.05E+01	South Texas 1	7.30E+00
Calvert Cliffs 1	1.03E+01	South Texas 2	7.30E+00
Calvert Cliffs 2	1.03E+01	Ginna	6.80E+00
Diablo Canyon 1	1.03E+01	Point Beach 1	5.88E+00
Indian Point 3	1.01E+01	Point Beach 2	5.88E+00
Waterford 3	1.01E+01	Prairie Island 1	5.44E+00
Watts Bar 2	9.97E+00	Prairie Island 2	5.44E+00
Watts Bar 1	9.87E+00	Palo Verde 1	4.52E+00
Summer	9.69E+00	Palo Verde 2	4.52E+00
Arkansas 2	9.58E+00	Palo Verde 3	4.52E+00
Millstone 2	9.54E+00	Byron 1	4.40E+00
Palisades	9.52E+00	Braidwood 1	4.27E+00
		Braidwood 2	4.27E+00
		Davis-Besse	4.15E+00
		Byron 2	4.12E+00

Table 3.11 BWR Liquid Releases — Fission and Activation Products, 2019
Shown in Descending Order of Total Activity

BWR Facility	Co-58 (Ci)	Co-60 (Ci)	Cs-134 (Ci)	Cs-137 (Ci)	Fe-55 (Ci)	I-131 (Ci)	Total (Ci)
Browns Ferry 1	2.67E-03	3.99E-02	6.48E-06	1.16E-03	8.07E-03	7.67E-07	5.18E-02
Browns Ferry 2	2.67E-03	3.99E-02	6.48E-06	1.16E-03	8.07E-03	7.67E-07	5.18E-02
Browns Ferry 3	2.67E-03	3.99E-02	6.48E-06	1.16E-03	8.07E-03	7.67E-07	5.18E-02
Perry	2.12E-03	2.26E-02		3.30E-04			2.50E-02
Susquehanna 1	2.35E-03	1.74E-02					1.97E-02
Susquehanna 2	2.35E-03	1.74E-02					1.97E-02
River Bend	2.73E-05	1.26E-02	1.48E-04	1.08E-04		4.33E-05	1.30E-02
Grand Gulf	6.11E-04	4.32E-03	7.59E-05	5.05E-04	4.41E-03		9.92E-03
Hope Creek	1.92E-03	5.83E-03	8.66E-04	8.22E-04		3.40E-04	9.78E-03
Peach Bottom 2	2.87E-04	3.33E-03		8.71E-07			3.62E-03
Peach Bottom 3	2.87E-04	3.33E-03		8.71E-07			3.62E-03
Limerick 1	7.39E-05	2.06E-03		1.76E-04	9.05E-04		3.21E-03
Limerick 2	7.39E-05	2.06E-03		1.76E-04	9.05E-04		3.21E-03
Cooper		2.50E-03				2.76E-05	2.52E-03
Hatch 2	9.18E-05	7.04E-04		1.68E-05	1.78E-04		9.90E-04
Hatch 1	5.60E-05	5.50E-04		1.67E-04	1.90E-04		9.64E-04
BWR Median Release	0.00E+00	3.14E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	7.56E-04
Brunswick 1		7.70E-05		2.46E-06		4.70E-04	5.49E-04
Brunswick 2		7.70E-05		2.46E-06		4.70E-04	5.49E-04
Clinton							
Columbia							
Dresden 2							
Dresden 3							
Duane Arnold							
Fermi 2							
FitzPatrick							
LaSalle 1							
LaSalle 2							
Monticello							
Nine Mile Point 1							
Nine Mile Point 2							
Quad Cities 1							
Quad Cities 2							

Table 3.12 BWR Liquid Releases — Tritium, 2019
Shown in Descending Order of Activity

BWR Facility	H-3 (Ci)
Hope Creek	9.92E+02
Hatch 1	5.88E+01
River Bend	5.67E+01
Browns Ferry 1	5.34E+01
Browns Ferry 2	5.34E+01
Browns Ferry 3	5.34E+01
Brunswick 1	4.95E+01
Brunswick 2	4.95E+01
Hatch 2	2.99E+01
Perry	2.22E+01
Grand Gulf	2.09E+01
Susquehanna 1	1.57E+01
Susquehanna 2	1.57E+01
Limerick 1	6.42E+00
Limerick 2	6.42E+00
Cooper	5.22E+00

BWR Facility	H-3 (Ci)
BWR Median Release	4.90E+00
Peach Bottom 2	4.58E+00
Peach Bottom 3	4.58E+00
Duane Arnold	1.73E-01
Quad Cities 1	7.97E-02
Quad Cities 2	7.97E-02
Dresden 2	2.18E-02
Dresden 3	2.18E-02
FitzPatrick	1.90E-02
Clinton	
Columbia	
Fermi 2	
LaSalle 1	
LaSalle 2	
Monticello	
Nine Mile Point 1	
Nine Mile Point 2	

Table 3.13 PWR Liquid Releases — Fission and Activation Products, 2019
Shown in Descending Order of Total Activity

PWR Facility	Co-58 (Ci)	Co-60 (Ci)	Cs-134 (Ci)	Cs-137 (Ci)	Fe-55 (Ci)	I-131 (Ci)	Total (Ci)
Vogtle 1	4.19E-03	2.11E-03		1.25E-05	2.88E-02		3.51E-02
Farley 2	6.19E-03	1.53E-02		3.60E-06	5.44E-04		2.21E-02
Arkansas 1	4.50E-03	8.16E-03	1.69E-03	4.51E-03	1.03E-03	1.92E-06	1.99E-02
Point Beach 1	4.93E-03	1.07E-02		1.05E-06	3.48E-03		1.91E-02
Point Beach 2	4.93E-03	1.07E-02		1.05E-06	3.48E-03		1.91E-02
Turkey Point 3	1.22E-02	7.06E-04		1.08E-03	4.10E-03	1.30E-04	1.82E-02
Turkey Point 4	1.22E-02	7.06E-04		1.08E-03	4.10E-03	1.30E-04	1.82E-02
Waterford 3	8.24E-03	3.58E-03			5.53E-03	4.54E-05	1.74E-02
Indian Point 2	2.86E-05	2.06E-04		1.45E-02	2.39E-03		1.71E-02
Callaway	5.18E-03	1.04E-02		5.02E-04			1.61E-02
Beaver Valley 1	1.02E-02	3.82E-03		5.01E-05	1.70E-03		1.58E-02
Beaver Valley 2	1.02E-02	3.82E-03		5.01E-05	1.70E-03		1.58E-02
Braidwood 1	6.10E-03	6.16E-03			2.90E-03		1.52E-02
Braidwood 2	6.10E-03	6.16E-03			2.90E-03		1.52E-02
Salem 2	7.51E-03	4.93E-03					1.24E-02
Diablo Canyon 1	7.20E-03	4.56E-03		2.91E-05			1.18E-02
Diablo Canyon 2	7.20E-03	4.56E-03		2.91E-05			1.18E-02
Surry 1	5.86E-04	3.12E-03		6.59E-03			1.03E-02
Surry 2	5.86E-04	3.12E-03		6.59E-03			1.03E-02
Indian Point 3	3.44E-03	3.64E-03		1.15E-05	2.78E-03		9.87E-03
North Anna 1	6.72E-03	2.13E-03	3.44E-05	8.86E-04			9.77E-03
North Anna 2	6.72E-03	2.13E-03	3.44E-05	8.86E-04			9.77E-03
Salem 1	5.34E-03	2.36E-03	2.33E-05	4.44E-04			8.17E-03
Farley 1	1.31E-03	6.31E-03		6.20E-05	4.19E-04	1.31E-06	8.10E-03
Calvert Cliffs 1	3.18E-03	1.58E-03	7.55E-05	2.94E-03		2.12E-05	7.80E-03
Calvert Cliffs 2	3.18E-03	1.58E-03	7.55E-05	2.94E-03		2.12E-05	7.80E-03
Sequoyah 1	2.73E-03	4.49E-03					7.22E-03
Sequoyah 2	2.73E-03	4.49E-03					7.22E-03
Byron 1	3.69E-03	9.61E-04					4.65E-03
Byron 2	3.69E-03	9.61E-04					4.65E-03
Catawba 1	4.41E-04	2.49E-03		9.14E-06	1.33E-03		4.26E-03
Catawba 2	4.41E-04	2.49E-03		9.14E-06	1.33E-03		4.26E-03


(continued on the following page)

Table 3.13 PWR Liquid Releases — Fission and Activation Products, 2019 (continued)
Shown in Descending Order of Total Activity

PWR Facility	Co-58 (Ci)	Co-60 (Ci)	Cs-134 (Ci)	Cs-137 (Ci)	Fe-55 (Ci)	I-131 (Ci)	Total (Ci)
PWR Median Release	1.25E-03	9.61E-04	0.00E+00	3.60E-06	0.00E+00	0.00E+00	4.13E-03
Millstone 3	1.19E-03	1.27E-04	3.00E-05	1.05E-03	1.59E-03		3.99E-03
Vogtle 2	1.26E-03	2.01E-03		6.47E-06	5.89E-04		3.86E-03
St. Lucie 1	5.50E-04	2.67E-03		1.61E-04			3.38E-03
St. Lucie 2	5.50E-04	2.67E-03		1.61E-04			3.38E-03
Harris	1.95E-04	2.78E-03	1.22E-05	7.39E-06			2.99E-03
Seabrook	1.43E-03	4.55E-04			1.02E-03		2.90E-03
Wolf Creek	1.67E-03	3.13E-04	5.71E-05	6.87E-04			2.72E-03
Millstone 2	4.09E-05	1.89E-05			2.03E-03		2.09E-03
Prairie Island 1	1.88E-03	1.97E-04					2.07E-03
Prairie Island 2	1.88E-03	1.97E-04					2.07E-03
Davis-Besse	1.25E-03	2.31E-04	7.84E-07	1.26E-04	3.89E-04		1.99E-03
South Texas 1	2.00E-05	9.38E-04		1.50E-06	7.29E-04		1.69E-03
Palisades	8.33E-04	6.99E-04					1.53E-03
Summer	3.28E-04	8.25E-04		2.12E-08			1.15E-03
South Texas 2	8.99E-05	4.83E-04			3.32E-04		9.05E-04
Ginna	6.13E-04	2.41E-04					8.54E-04
Comanche Peak 1	5.37E-04	5.26E-05					5.89E-04
Comanche Peak 2	5.37E-04	5.26E-05					5.89E-04
Arkansas 2	3.69E-05	1.25E-04		3.67E-04			5.29E-04
Cook 1	1.50E-04	6.78E-05	2.35E-06	4.30E-05			2.63E-04
Cook 2	1.50E-04	6.78E-05	2.35E-06	4.30E-05			2.63E-04
Oconee 1	7.57E-05	2.67E-05			2.68E-05		1.29E-04
Oconee 2	7.57E-05	2.67E-05			2.68E-05		1.29E-04
Oconee 3	7.57E-05	2.67E-05			2.68E-05		1.29E-04
McGuire 1							
McGuire 2							
Palo Verde 1							
Palo Verde 2							
Palo Verde 3							
Robinson 2							
Watts Bar 1							
Watts Bar 2							

Table 3.14 PWR Liquid Releases — Tritium, 2019
Shown in Descending Order of Activity

PWR Facility	H-3 (Ci)	PWR Facility	H-3 (Ci)
Watts Bar 1	2.82E+03	PWR Median Release	6.07E+02
Braidwood 1	1.68E+03	Comanche Peak 1	6.07E+02
Braidwood 2	1.68E+03	Comanche Peak 2	6.07E+02
Wolf Creek	1.55E+03	Arkansas 1	5.70E+02
Millstone 3	1.41E+03	McGuire 1	5.42E+02
South Texas 2	1.41E+03	McGuire 2	5.42E+02
Cook 1	1.35E+03	Arkansas 2	5.10E+02
Cook 2	1.35E+03	Turkey Point 3	4.97E+02
Diablo Canyon 1	1.11E+03	Turkey Point 4	4.97E+02
Diablo Canyon 2	1.11E+03	Beaver Valley 1	4.71E+02
Byron 1	1.06E+03	Beaver Valley 2	4.71E+02
Byron 2	1.06E+03	Vogtle 2	4.63E+02
Davis-Besse	9.99E+02	Indian Point 2	4.54E+02
Salem 1	9.92E+02	Salem 2	4.46E+02
North Anna 1	9.76E+02	Waterford 3	4.35E+02
North Anna 2	9.76E+02	St. Lucie 1	4.29E+02
Callaway	9.15E+02	St. Lucie 2	4.29E+02
Sequoyah 1	9.09E+02	Indian Point 3	3.78E+02
Sequoyah 2	9.09E+02	Millstone 2	3.67E+02
South Texas 1	8.59E+02	Catawba 1	3.62E+02
Summer	8.44E+02	Catawba 2	3.62E+02
Vogtle 1	8.32E+02	Point Beach 1	3.15E+02
Farley 1	7.14E+02	Point Beach 2	3.15E+02
Farley 2	7.07E+02	Oconee 1	3.14E+02
Seabrook	6.59E+02	Oconee 2	3.14E+02
Ginna	6.39E+02	Oconee 3	3.14E+02
Surry 1	6.22E+02	Watts Bar 2	2.87E+02
Surry 2	6.22E+02	Robinson 2	2.84E+02
Calvert Cliffs 1	6.17E+02	Prairie Island 1	2.16E+02
Calvert Cliffs 2	6.17E+02	Prairie Island 2	2.16E+02
Harris	6.13E+02	Palisades	1.97E+02
		Palo Verde 1	
		Palo Verde 2	
		Palo Verde 3	

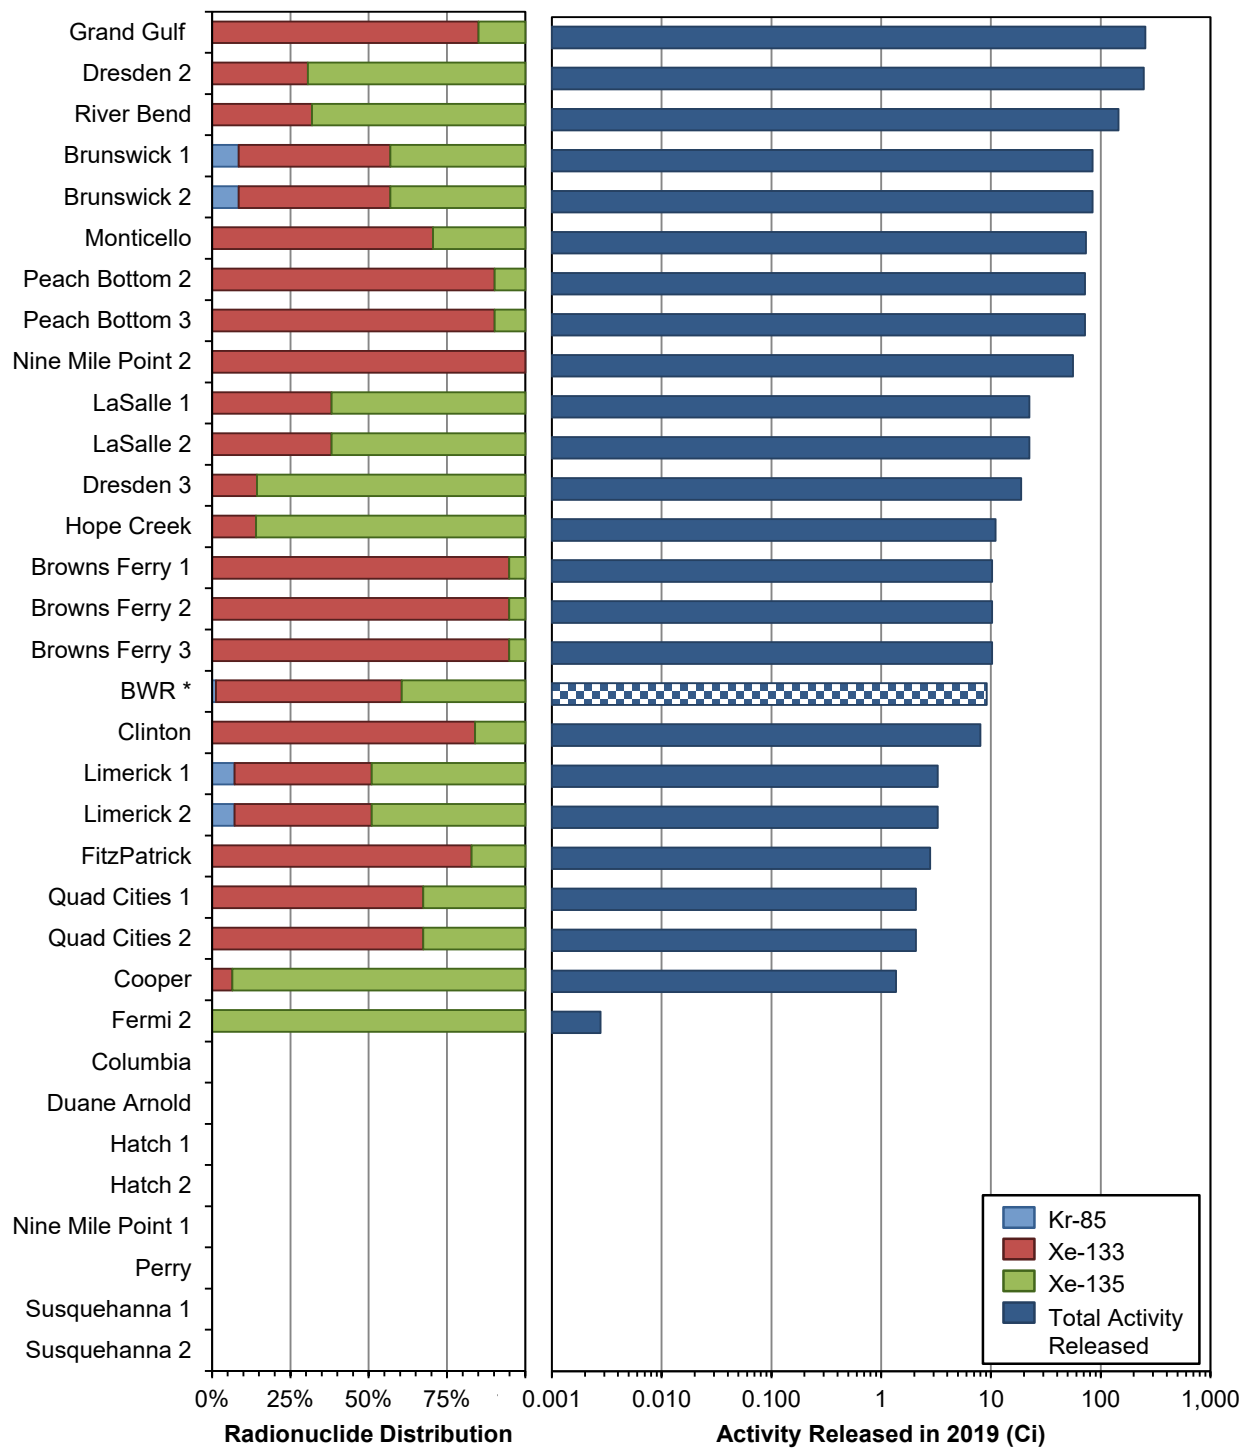

* BWR average radionuclide mix and median activity released

Figure 3.1 BWR Gaseous Releases — Fission and Activation Gases


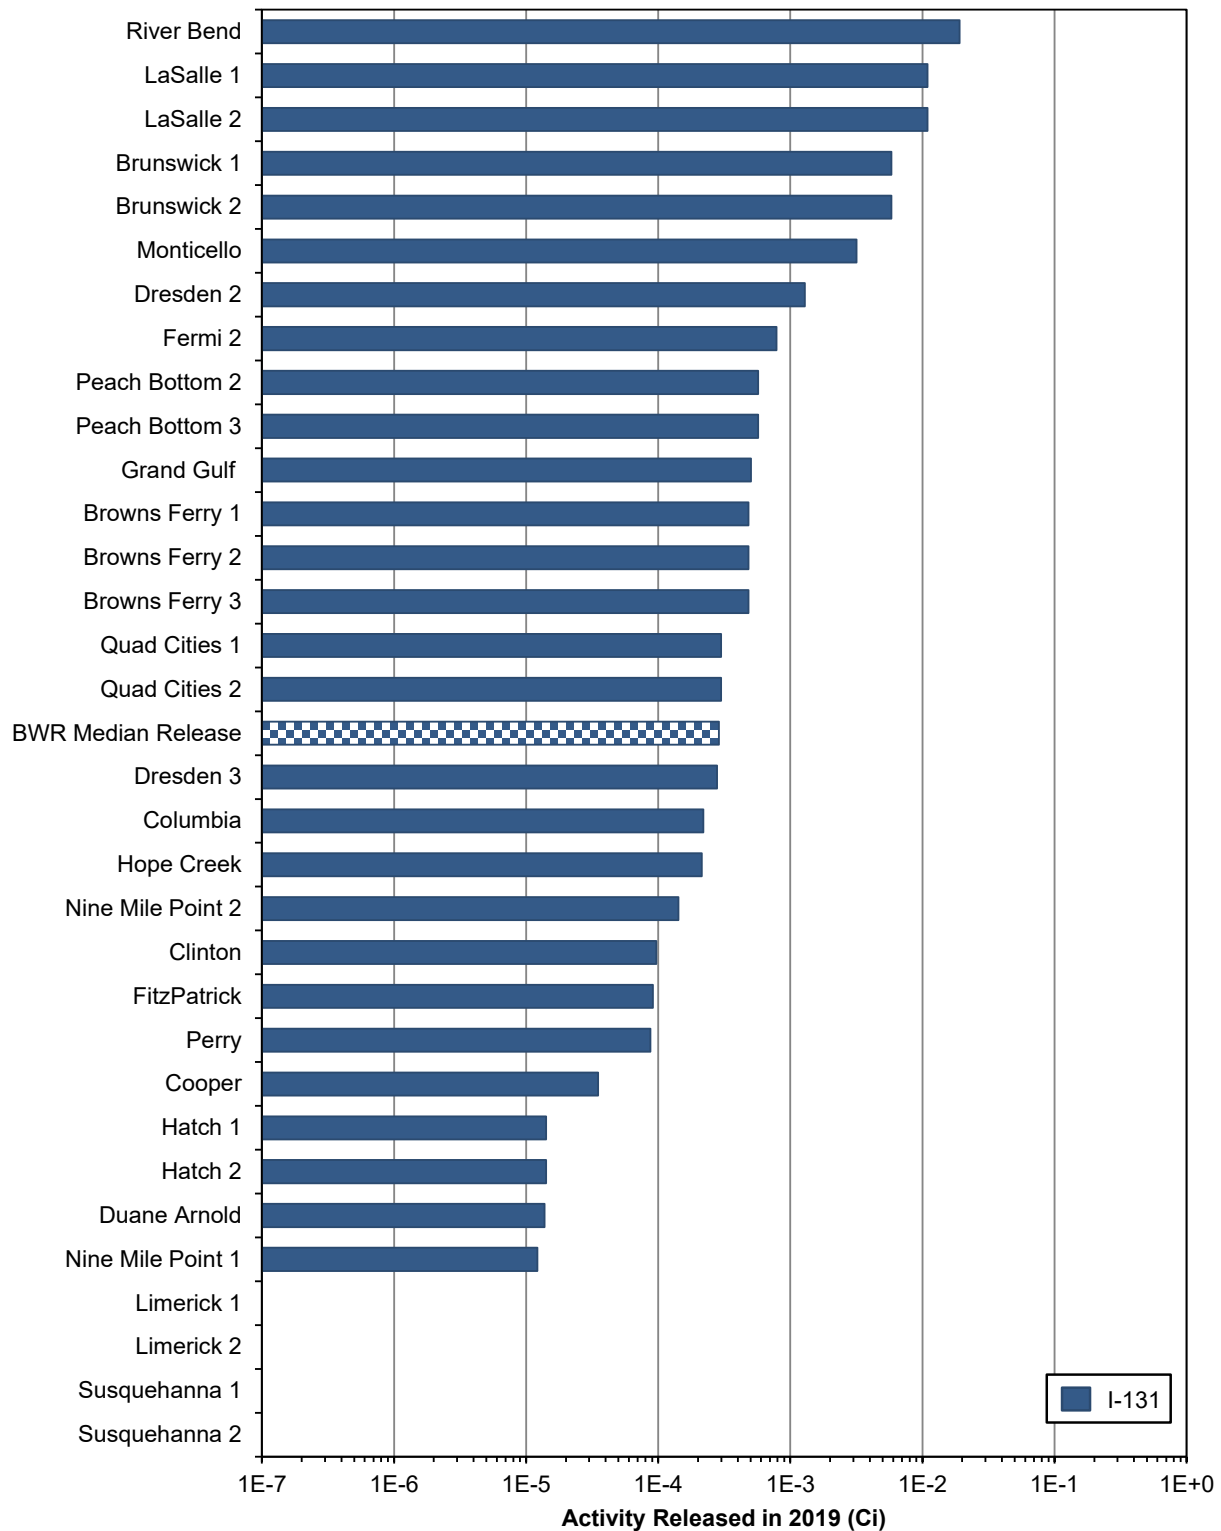


Figure 3.2 BWR Gaseous Releases — Iodine

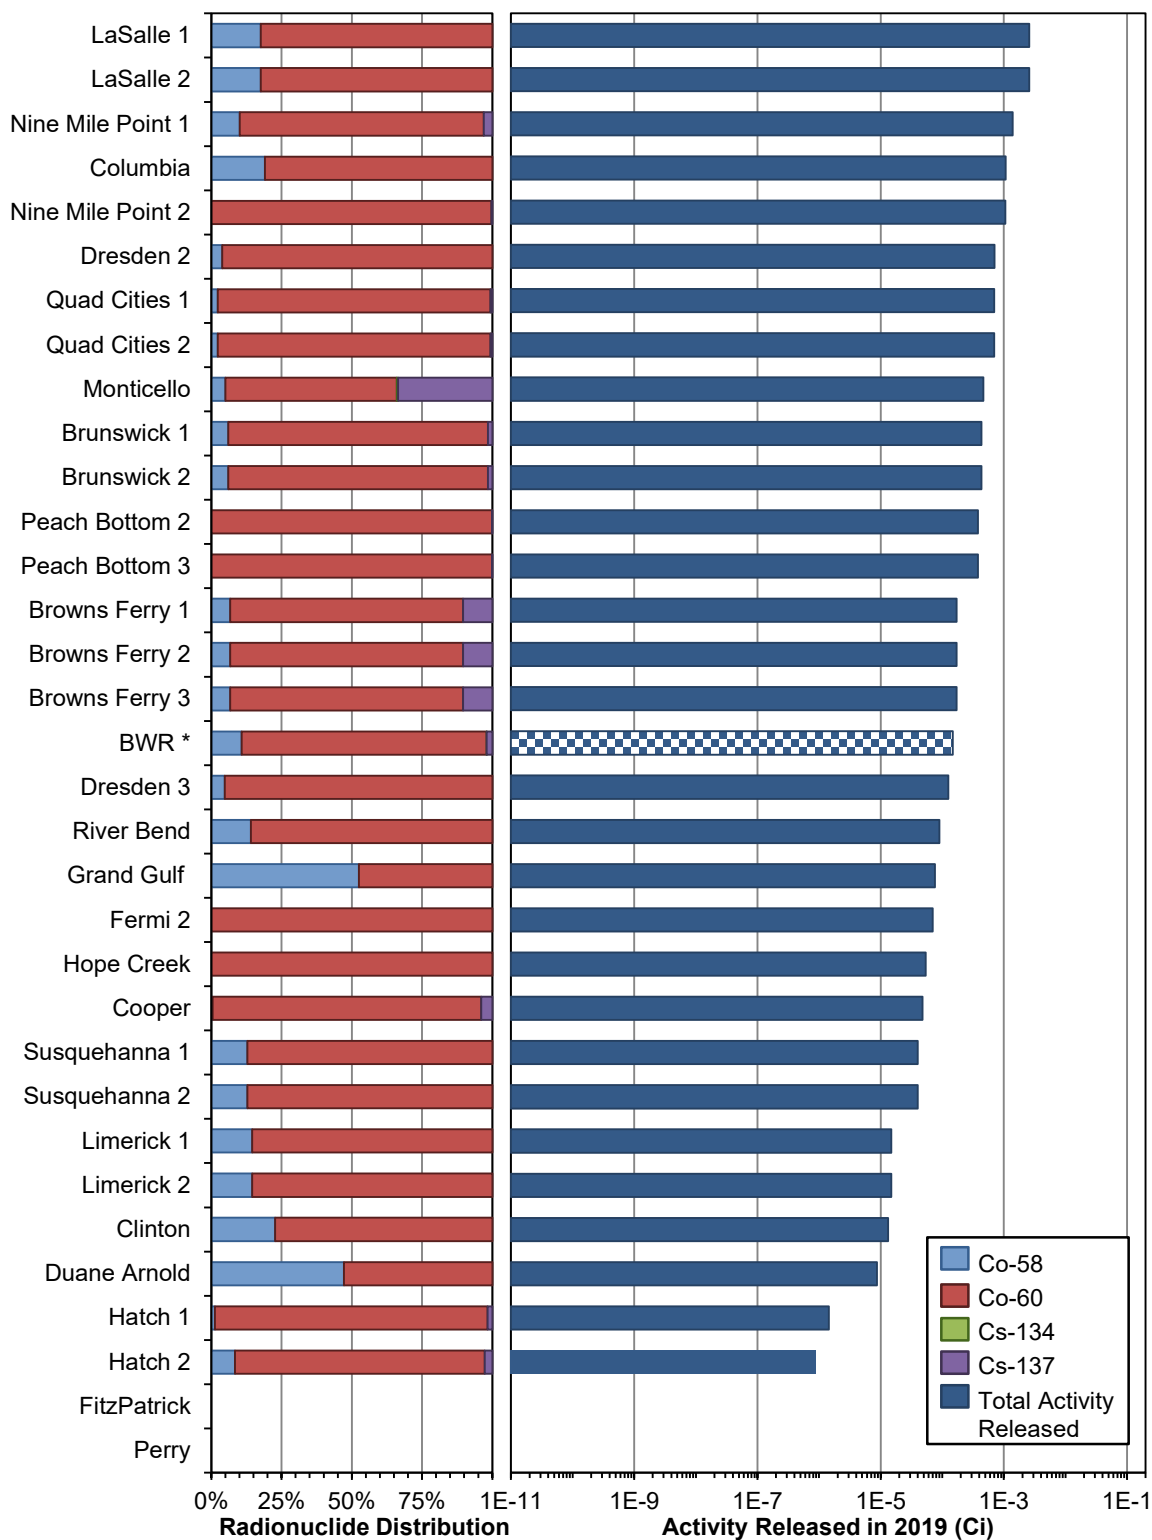

* BWR average radionuclide mix and median activity released

Figure 3.3 BWR Gaseous Releases — Particulates

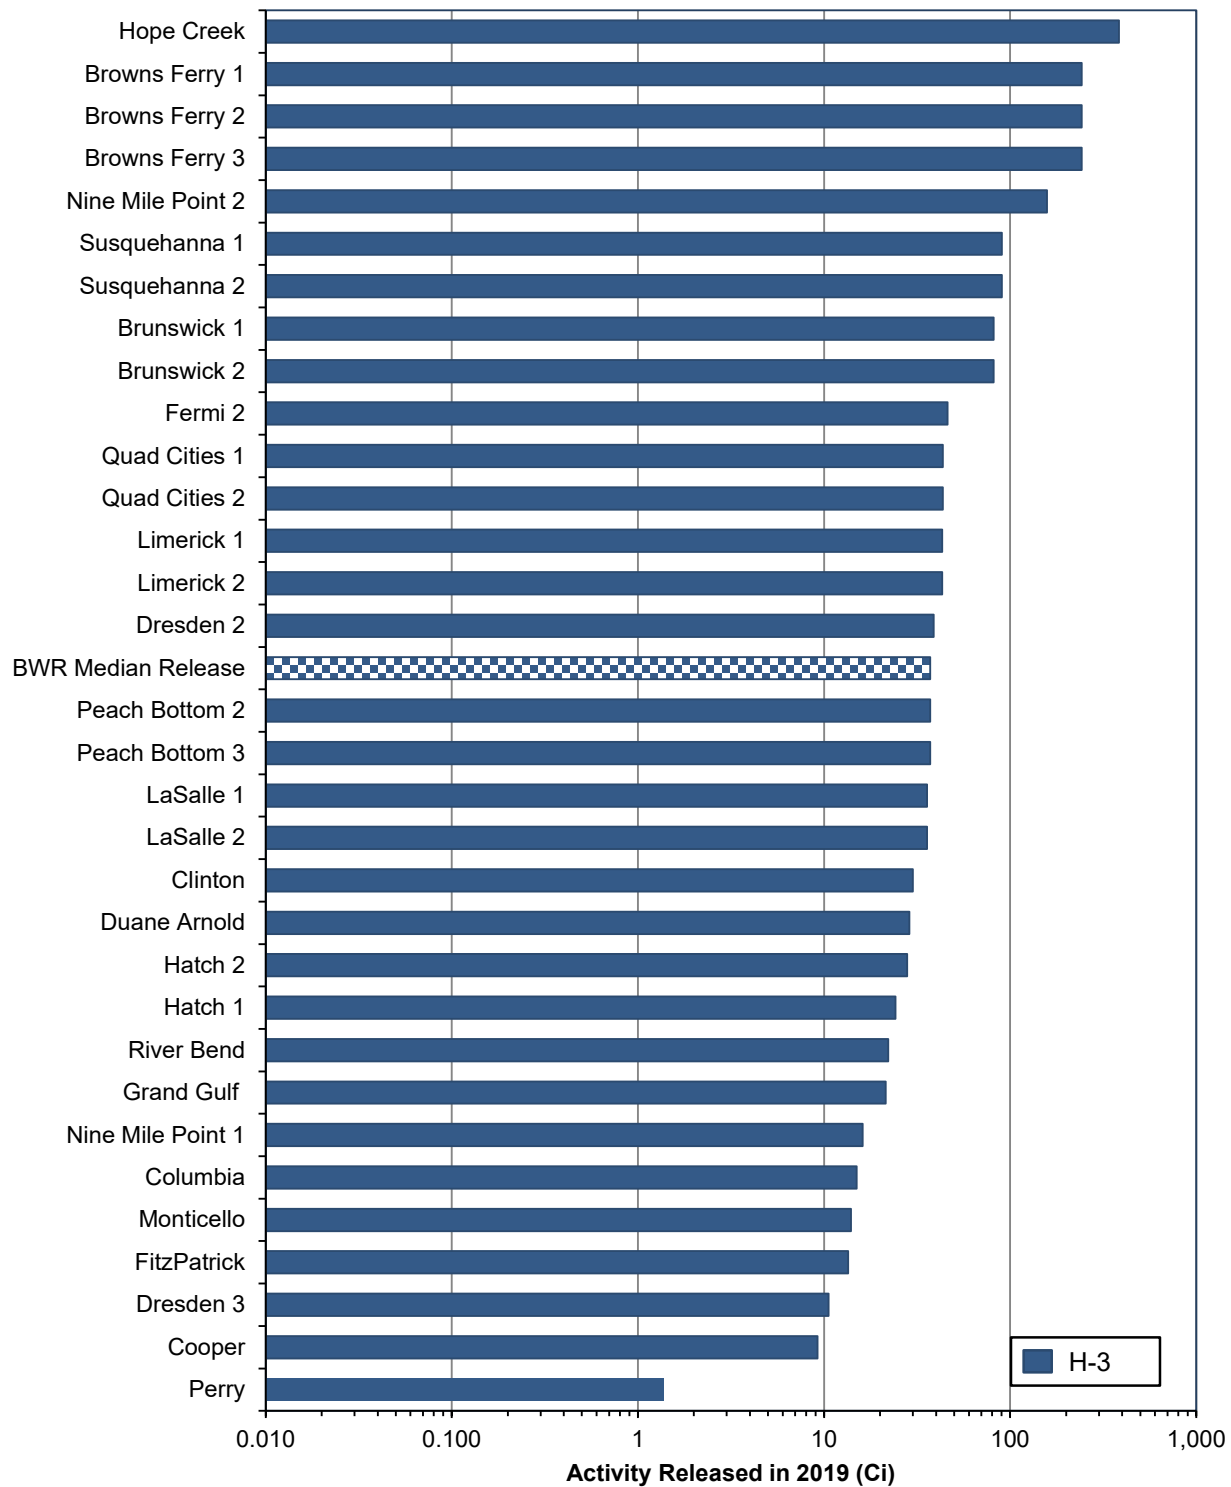


Figure 3.4 BWR Gaseous Releases — Tritium


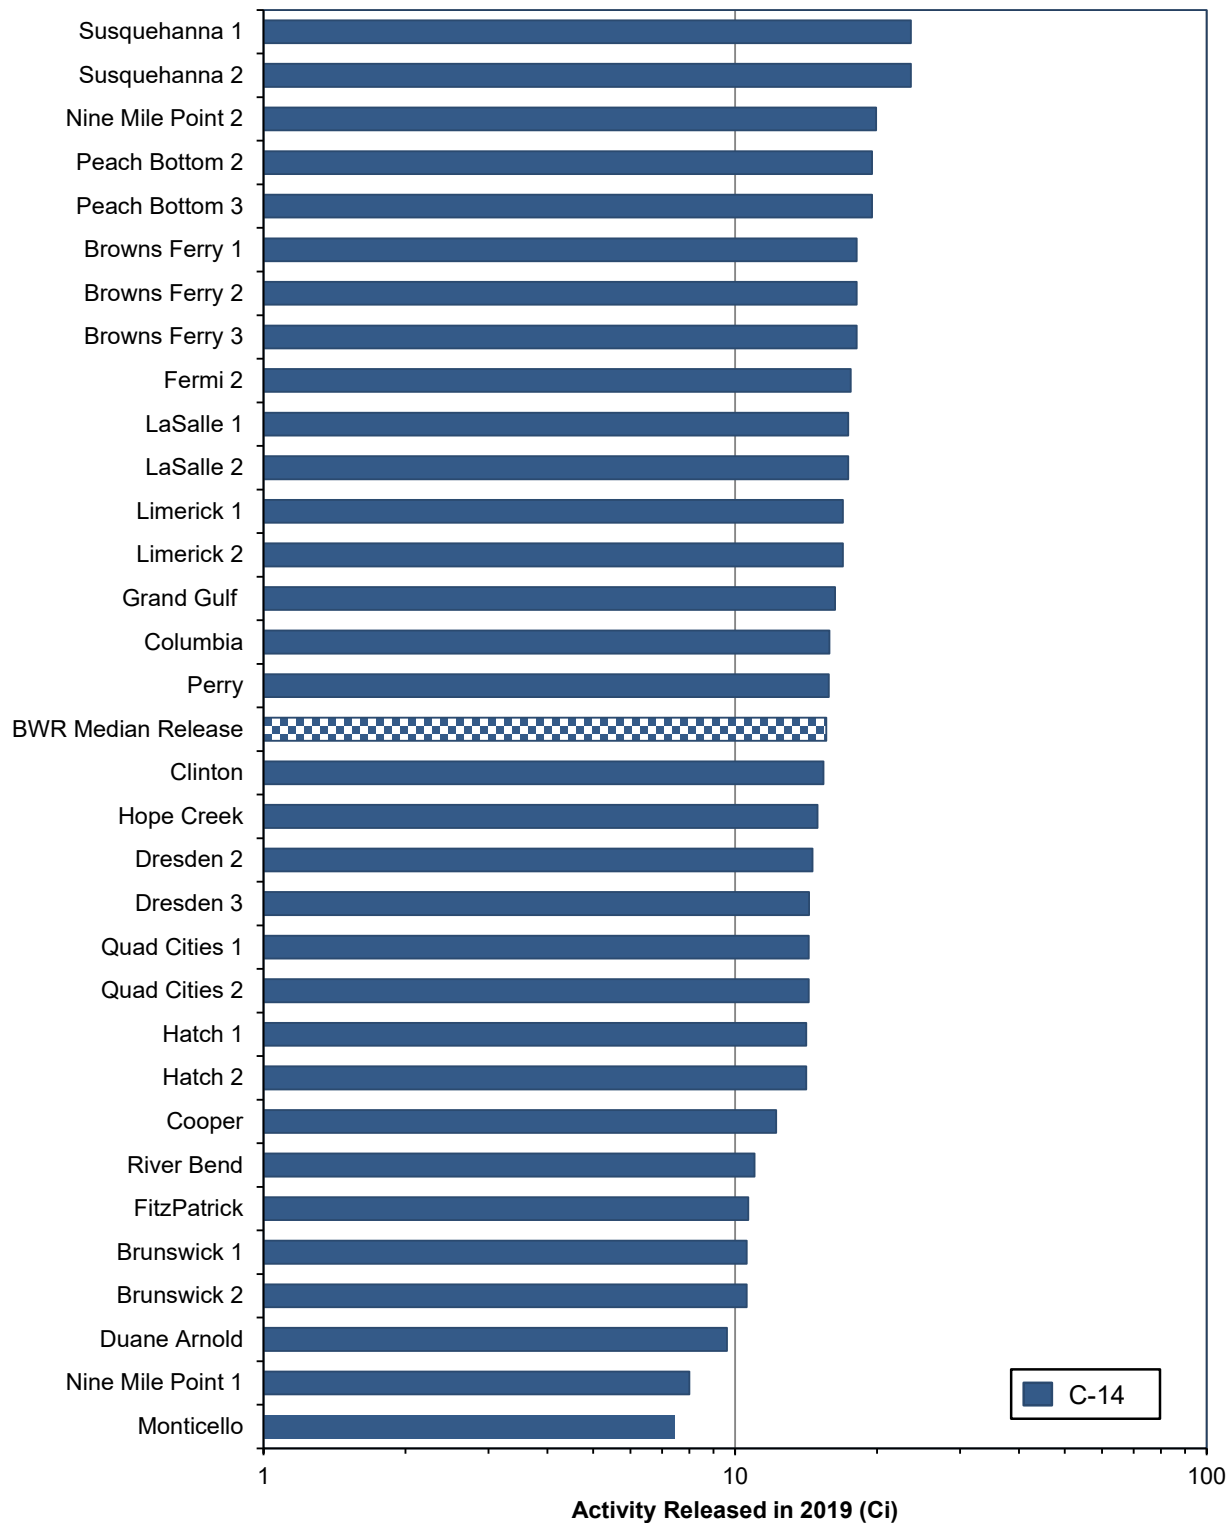



Figure 3.5 BWR Gaseous Releases — Carbon-14

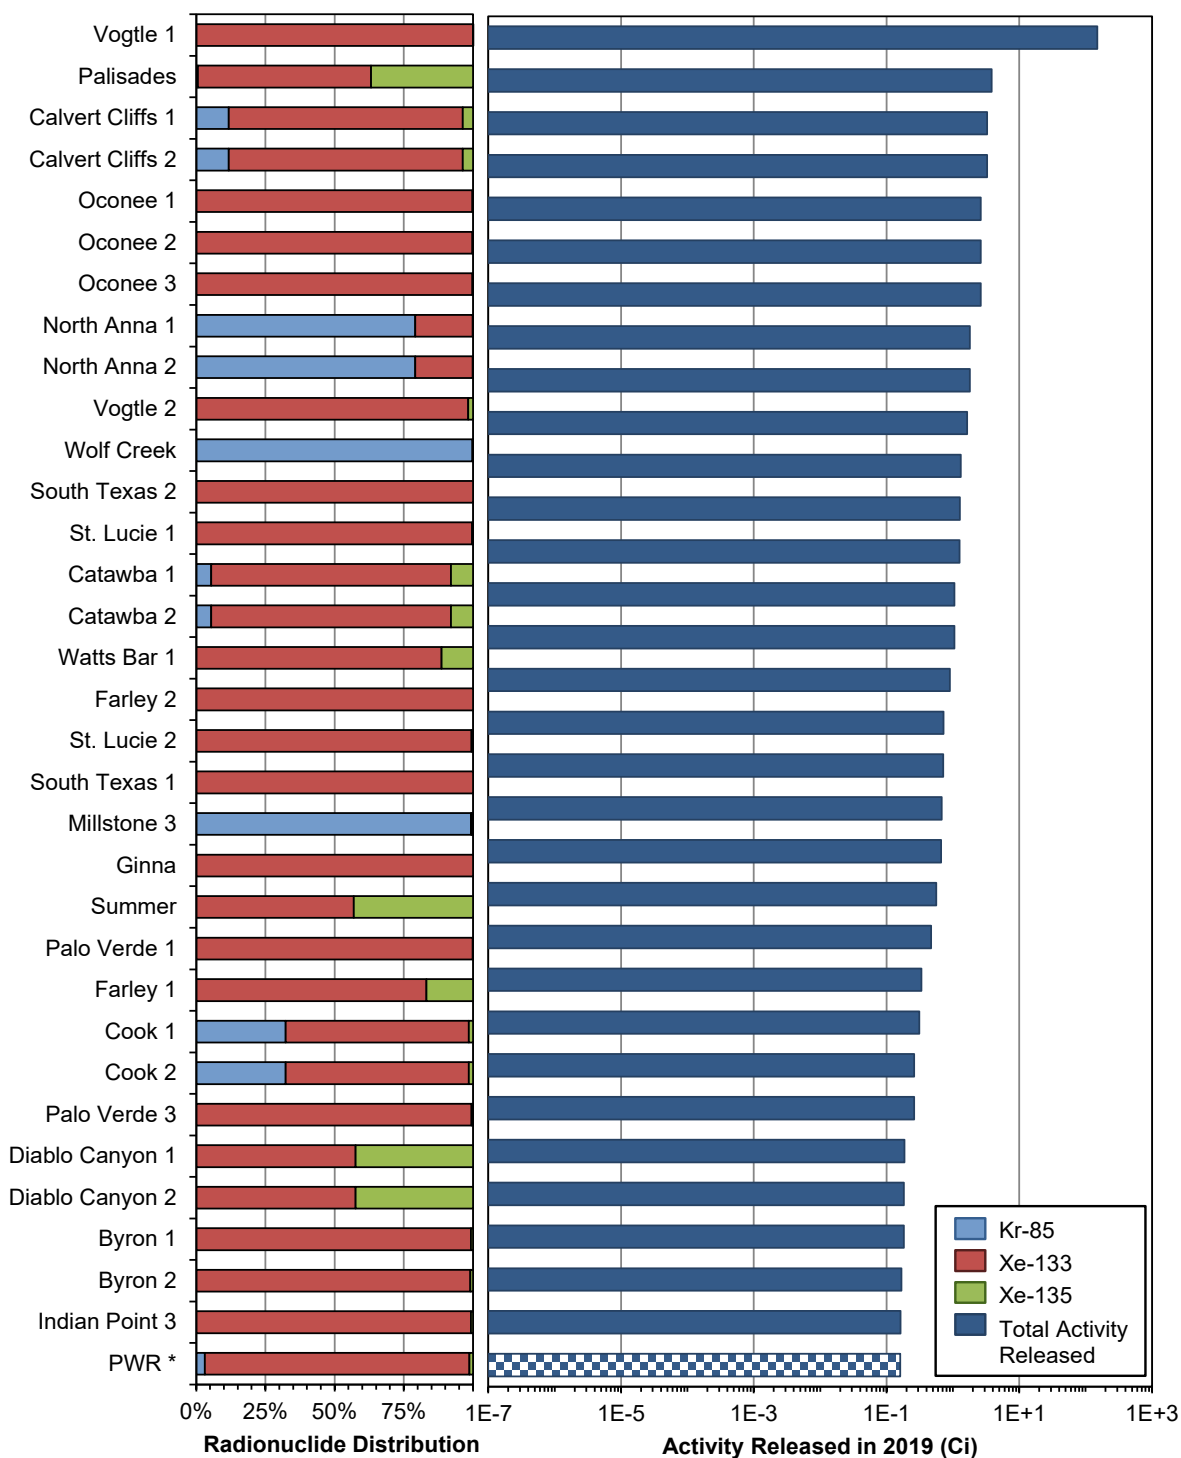

* PWR average radionuclide mix and median activity released


Figure 3.6 PWR Gaseous Releases — Fission and Activation Gases

(continued on the following page)

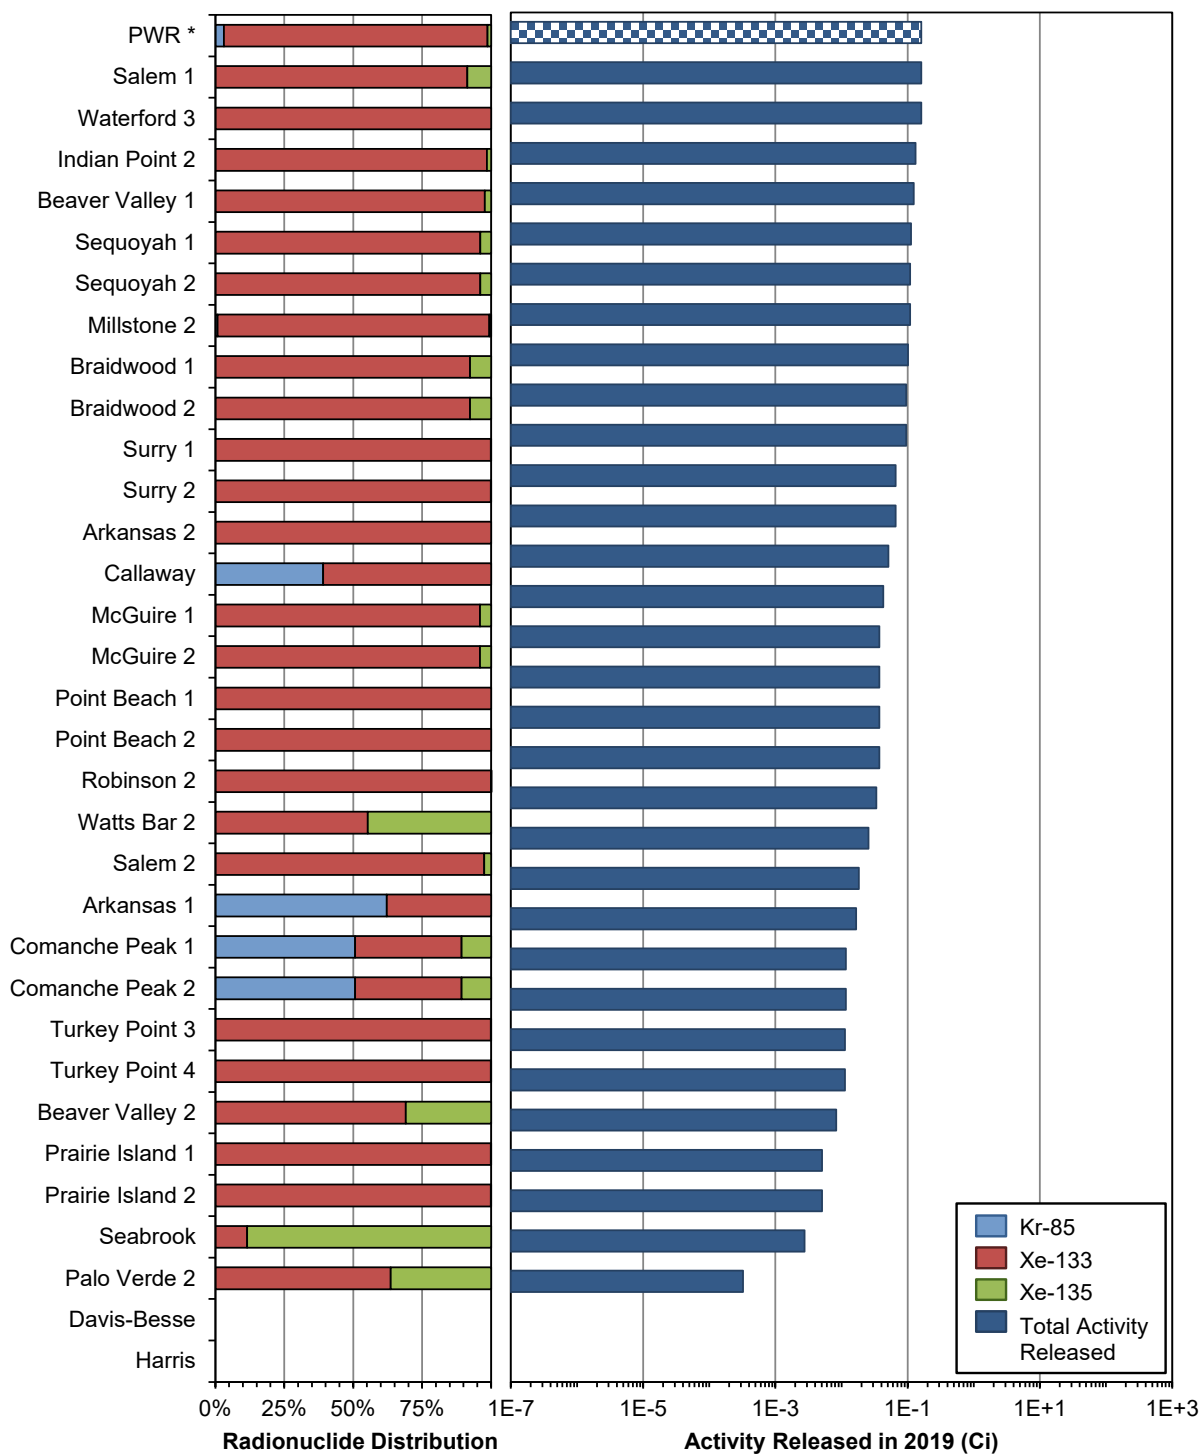


* PWR average radionuclide mix and median activity released

Figure 3.6 PWR Gaseous Releases — Fission and Activation Gases (continued)

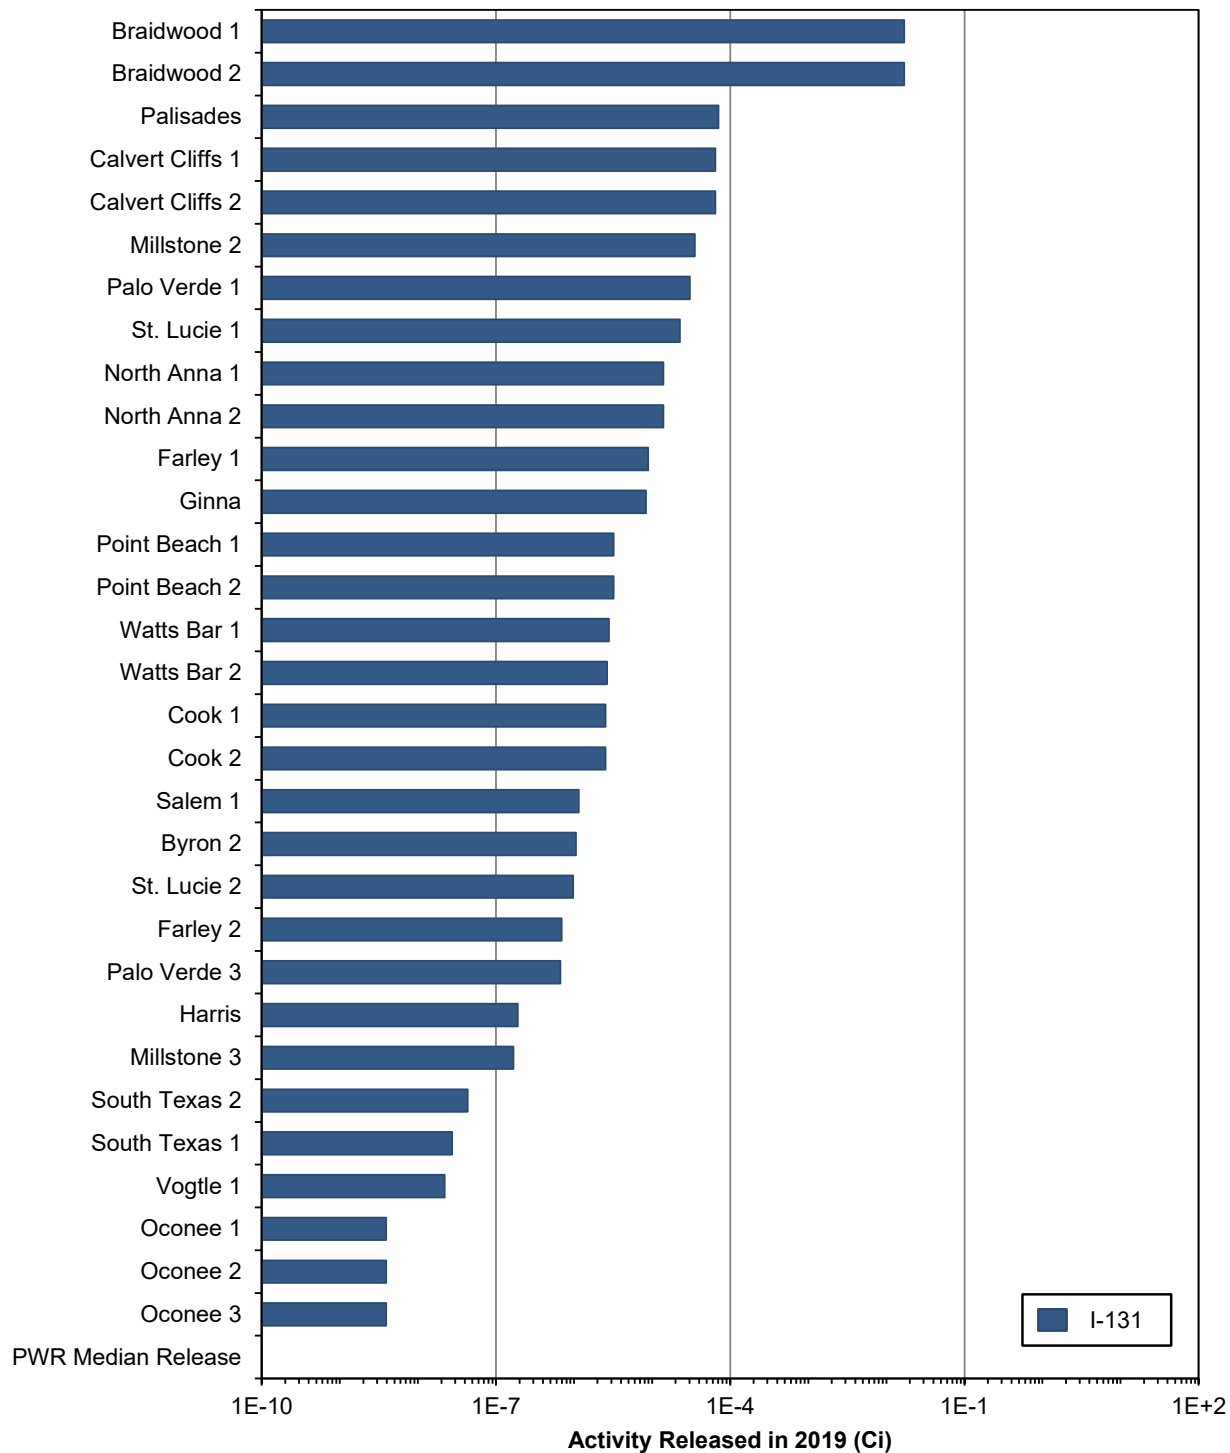

Note: See Table 3.7 for list of nuclear power plants with no releases of iodine reported.

Figure 3.7 PWR Gaseous Releases — Iodine

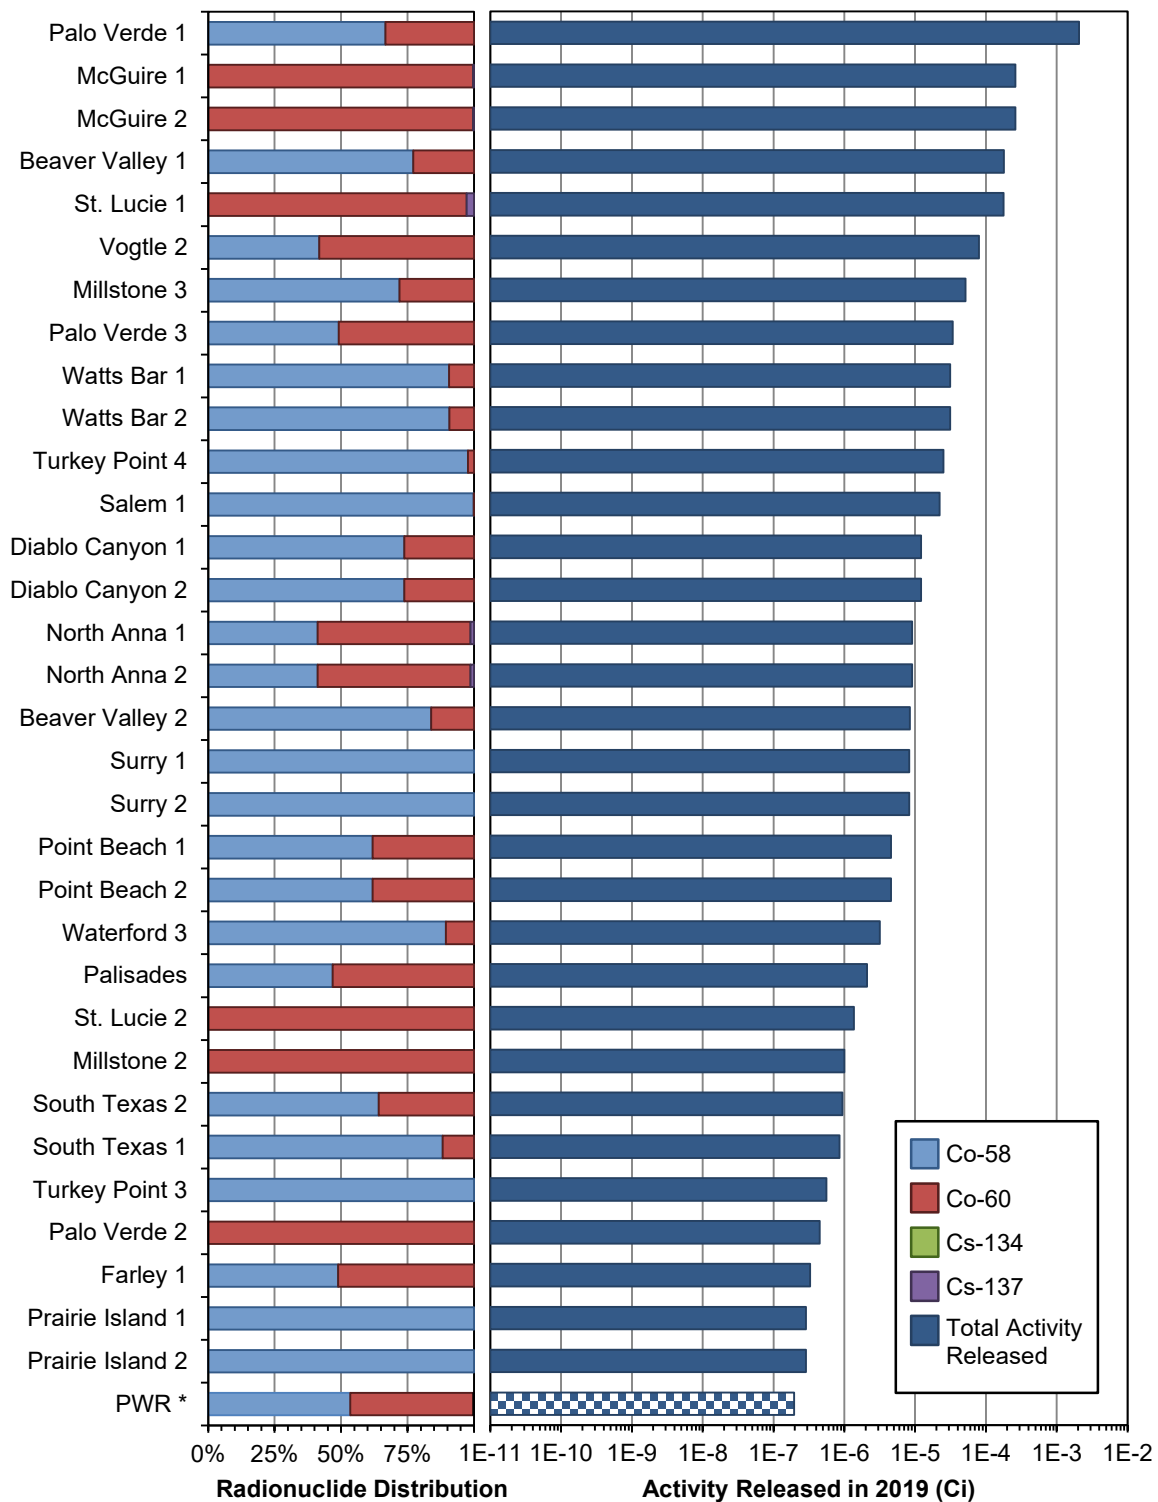

Note: See Table 3.8 for list of nuclear power plants with no releases of selected particulates reported.
 * PWR average radionuclide mix and median activity released

Figure 3.8 PWR Gaseous Releases — Particulates

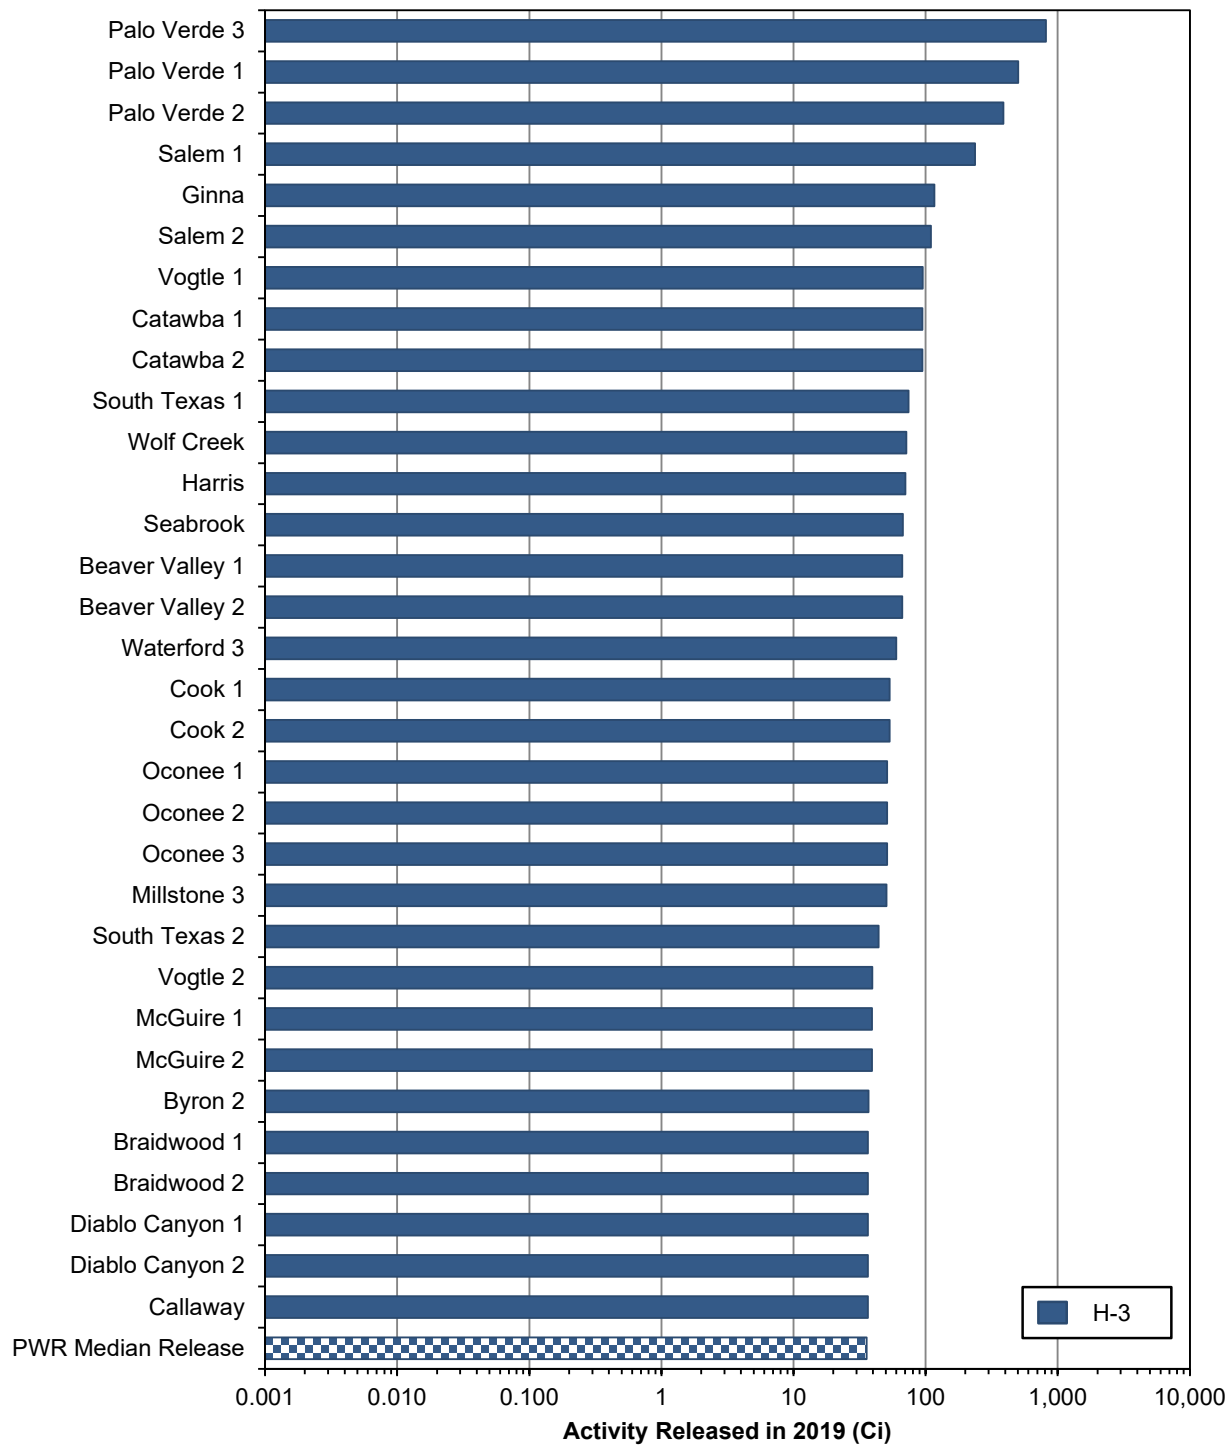


Figure 3.9 PWR Gaseous Releases — Tritium

(continued on the following page)

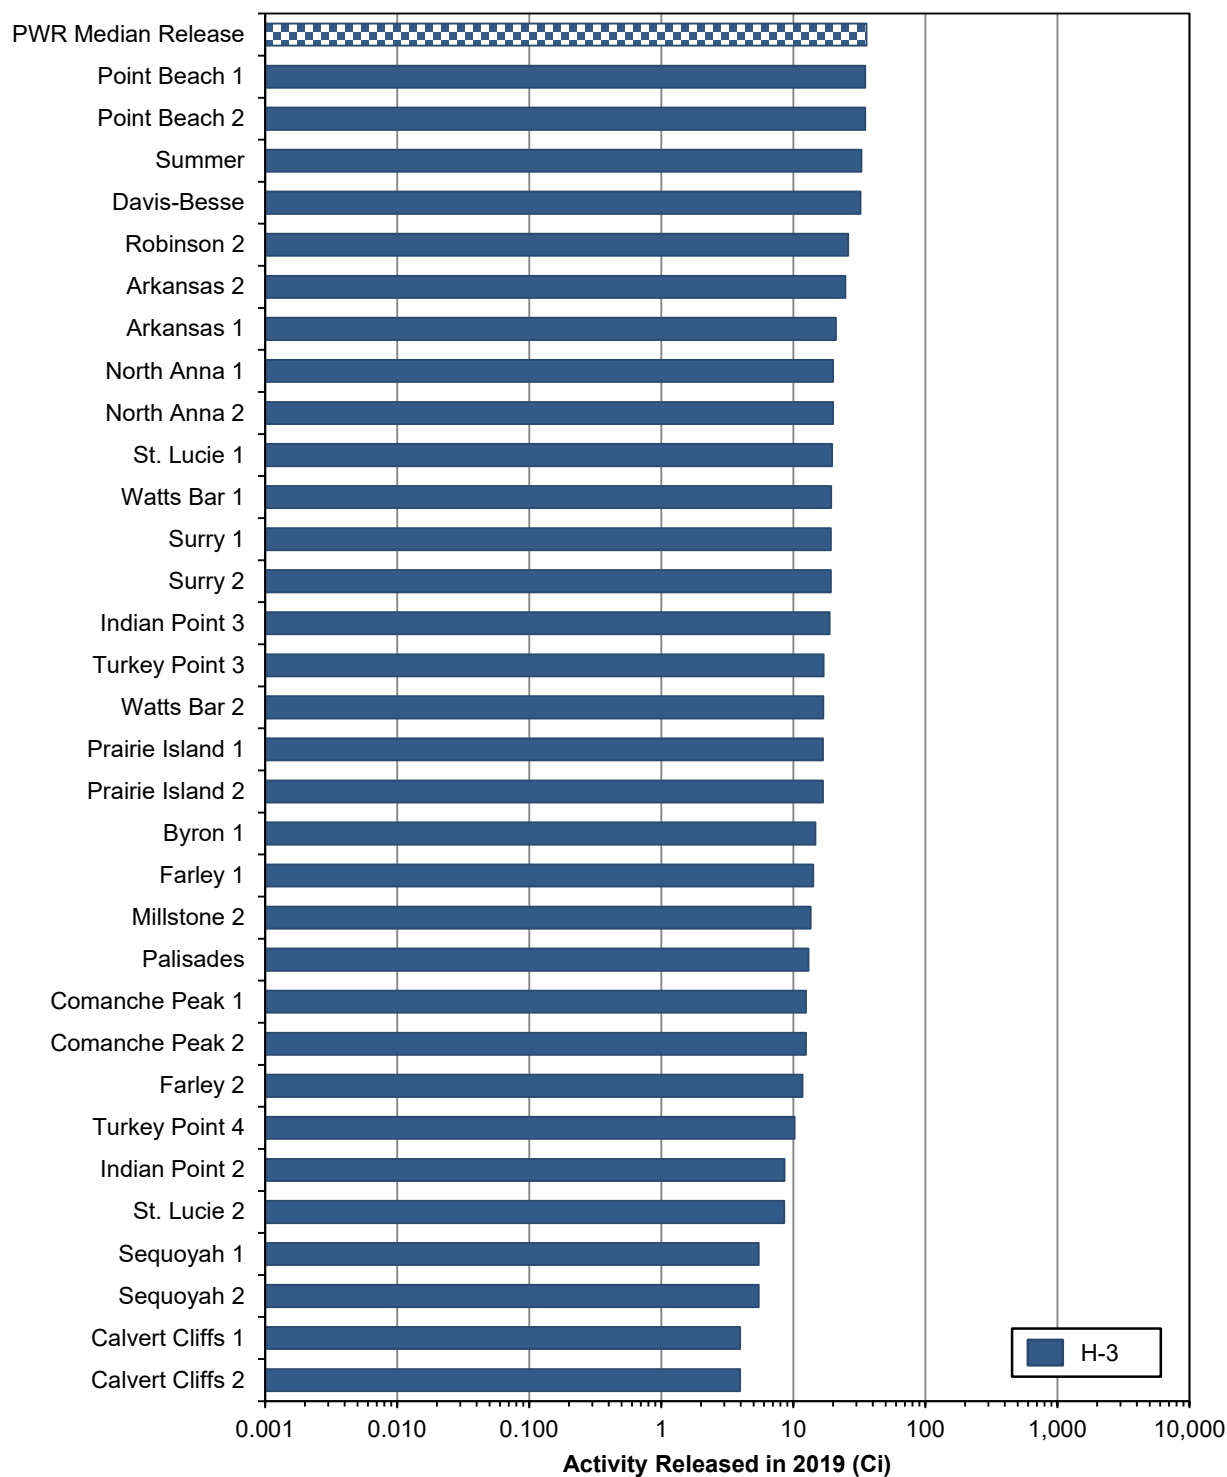


Figure 3.9 PWR Gaseous Releases — Tritium (continued)

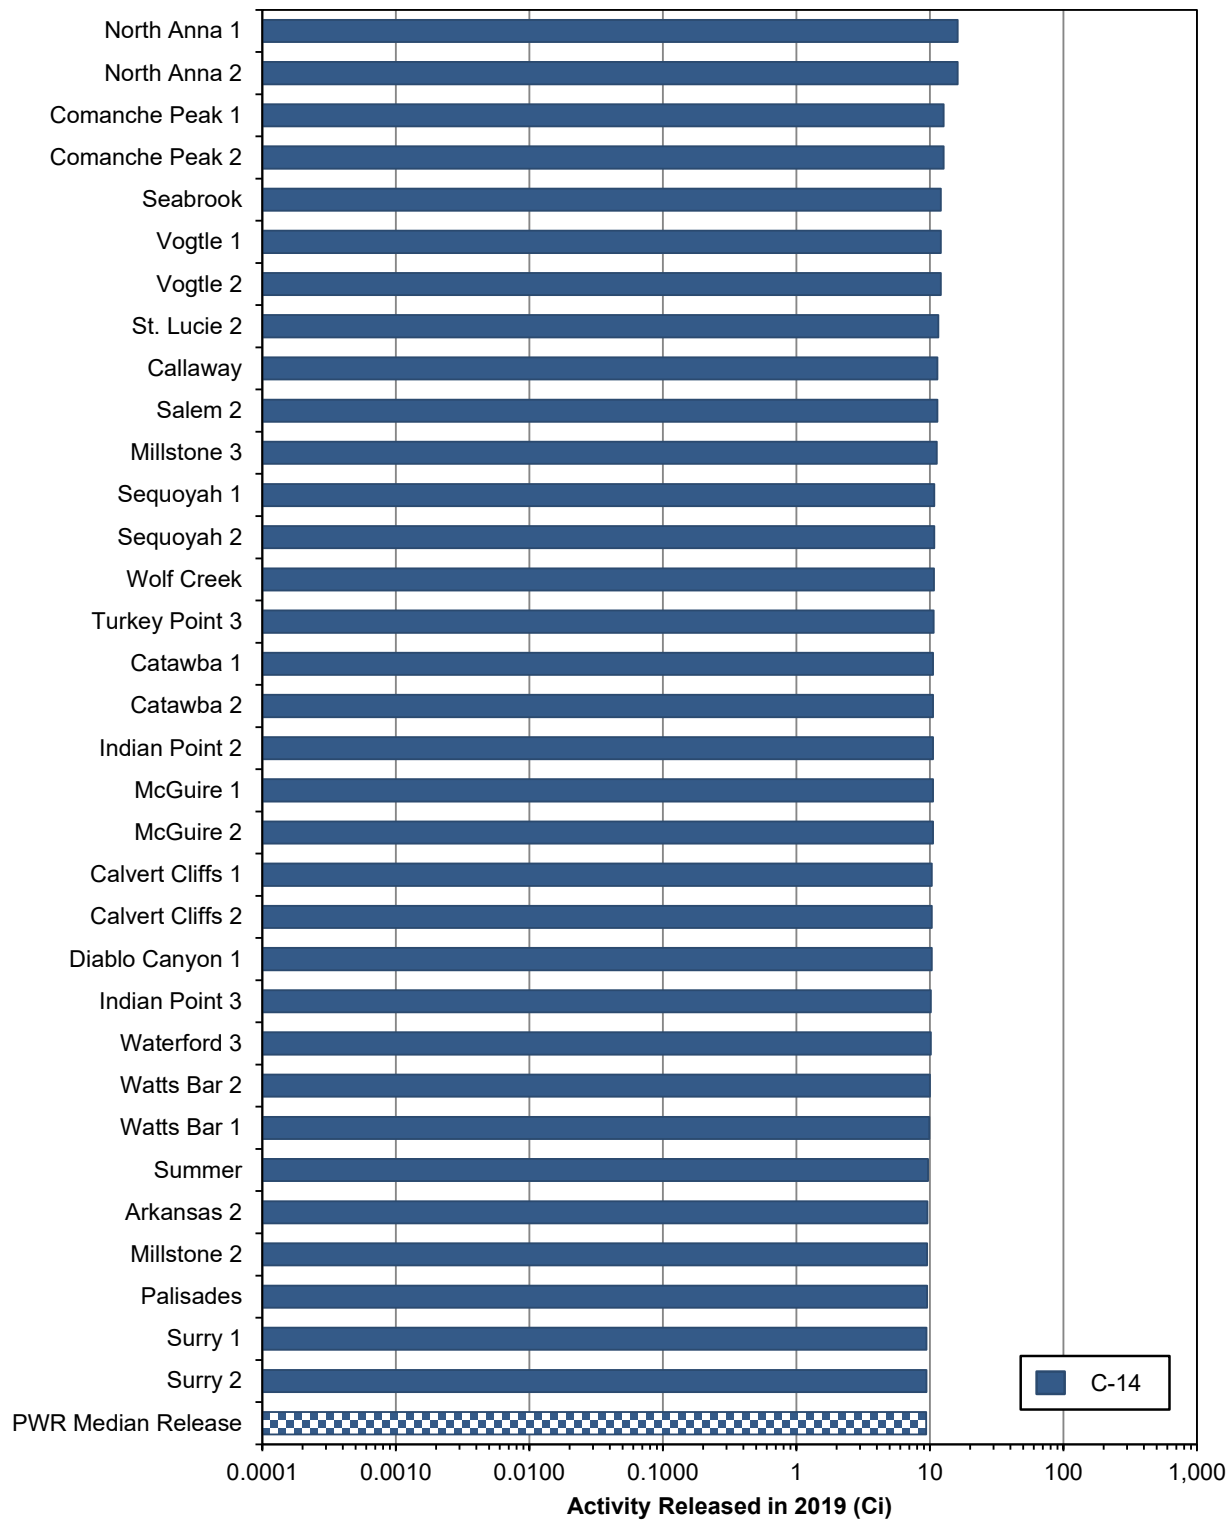


Figure 3.10 PWR Gaseous Releases — Carbon-14

(continued on the following page)


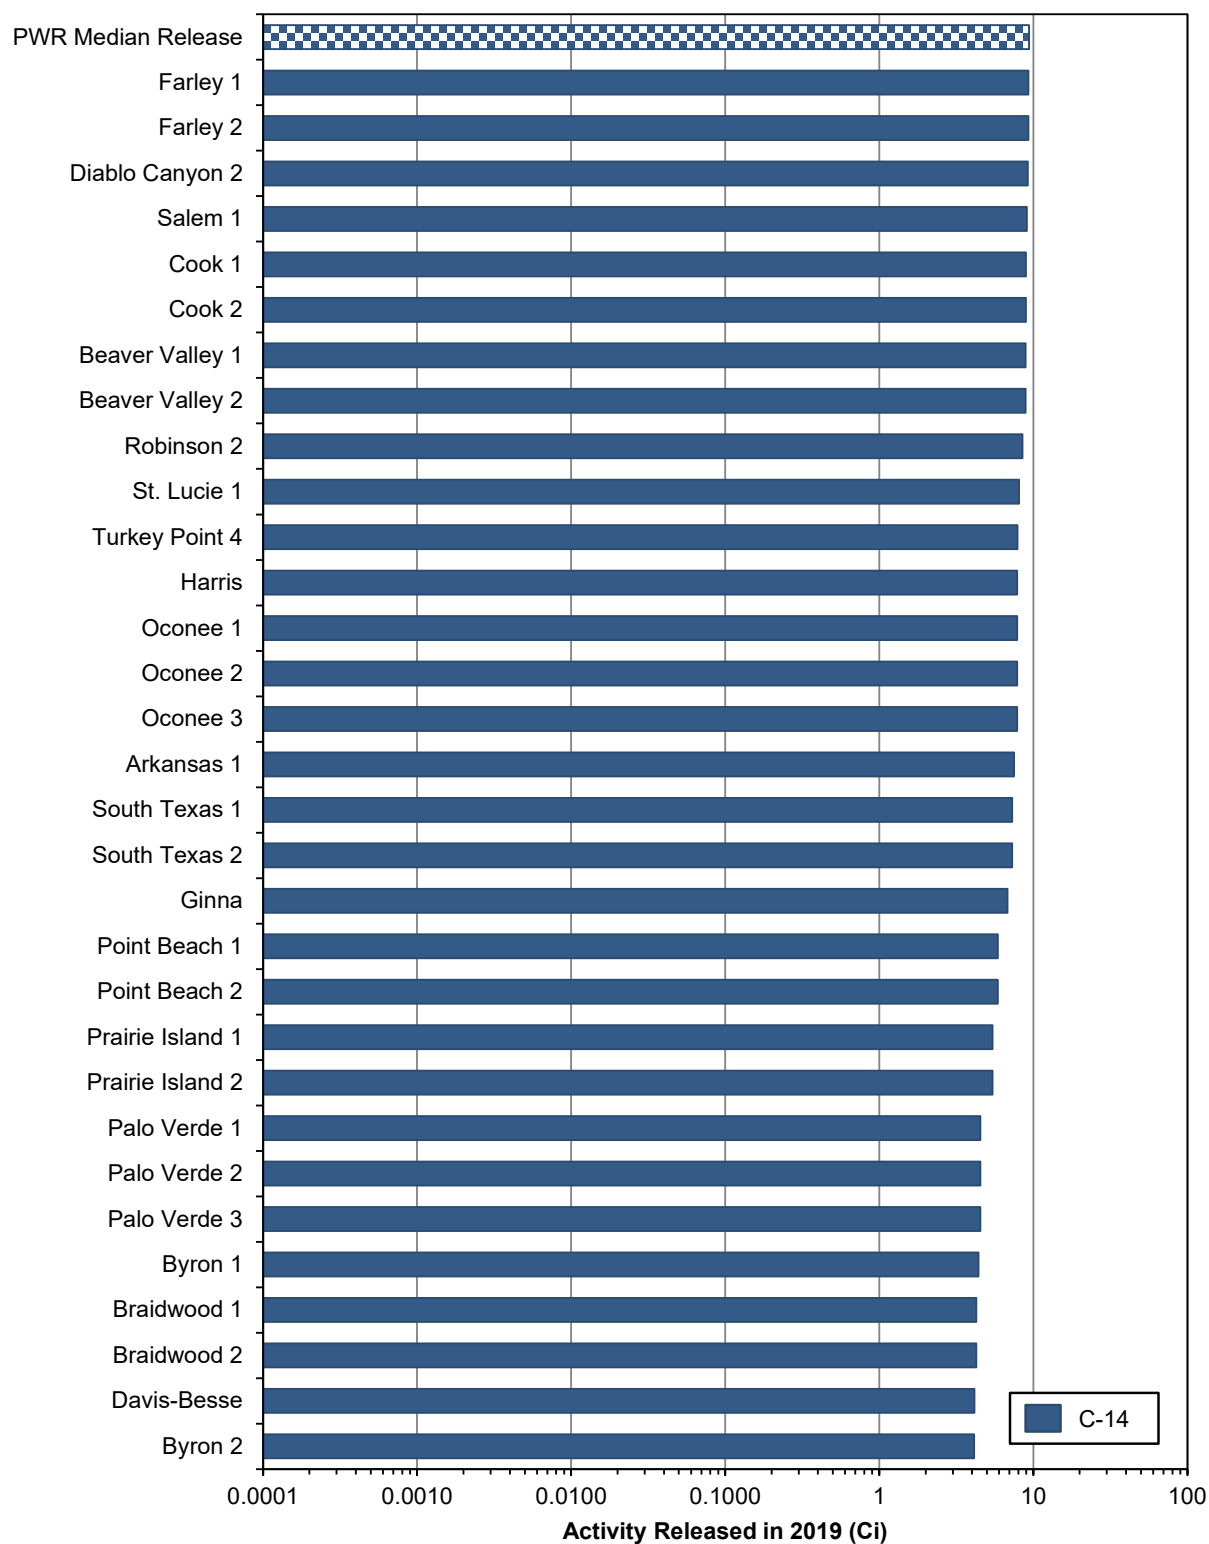


Figure 3.10 PWR Gaseous Releases — Carbon-14 (continued)

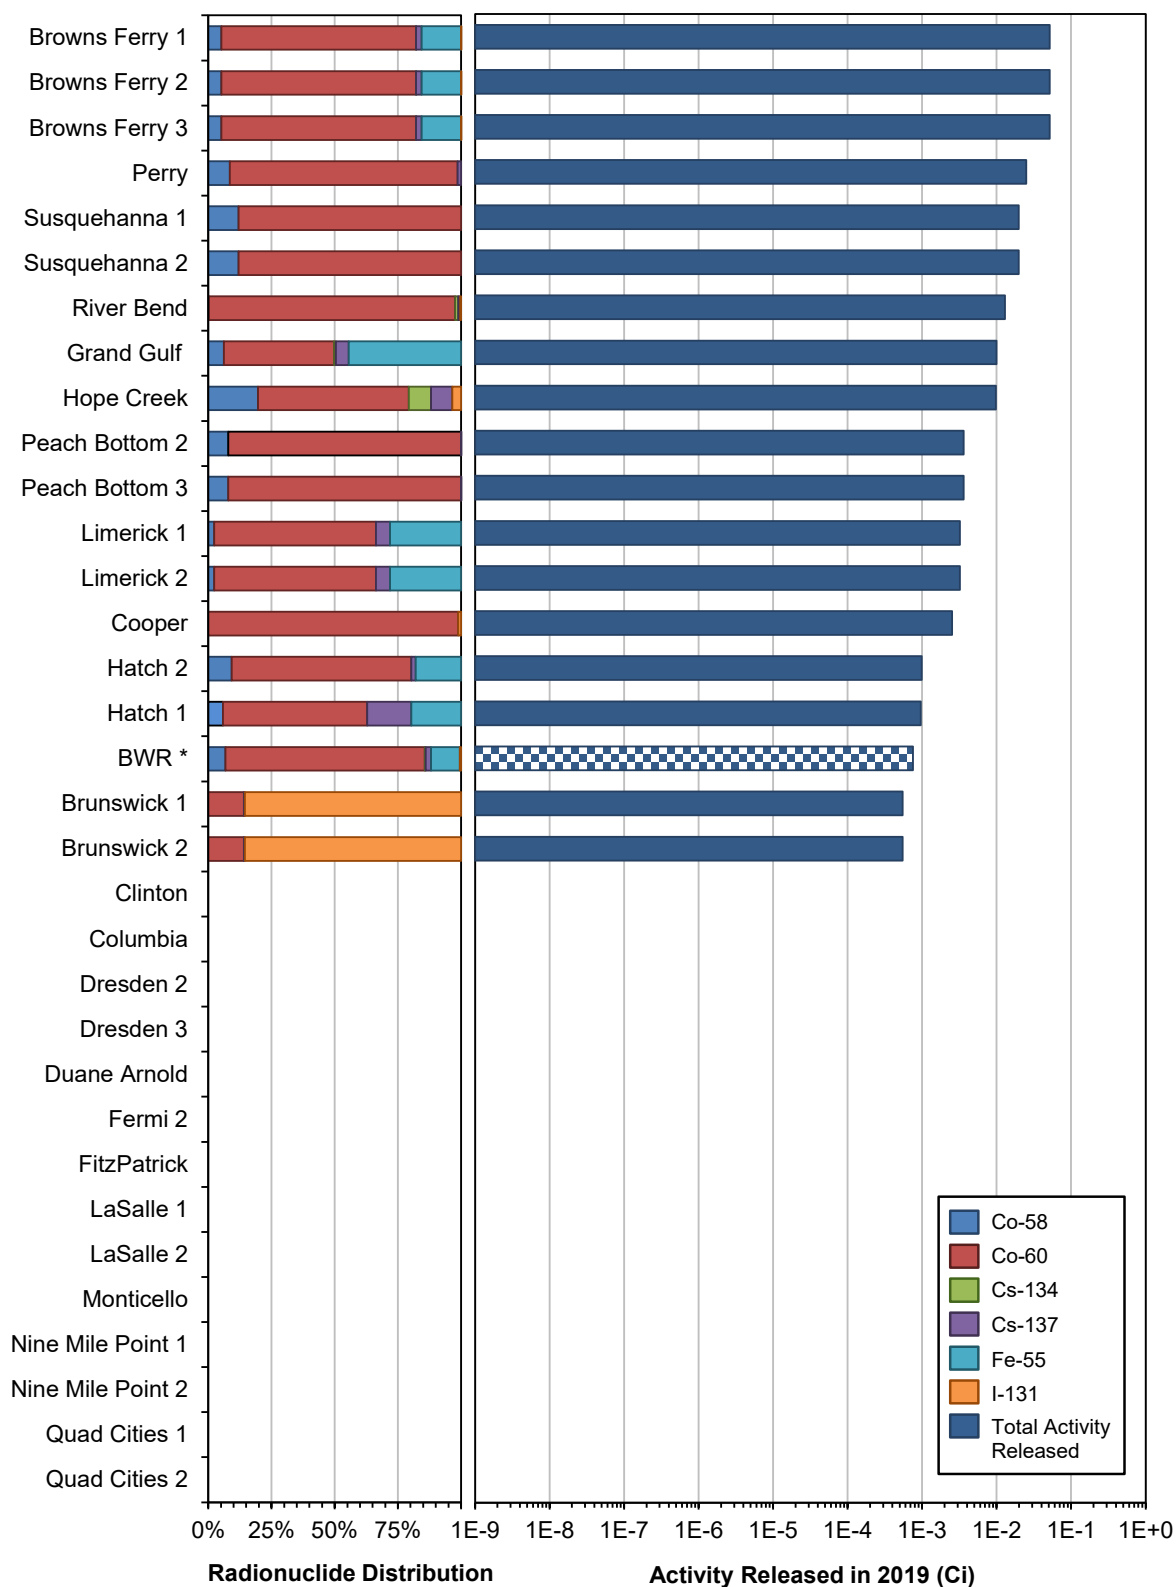

* BWR average radionuclide mix and median activity released

Figure 3.11 BWR Liquid Releases — Fission and Activation Products


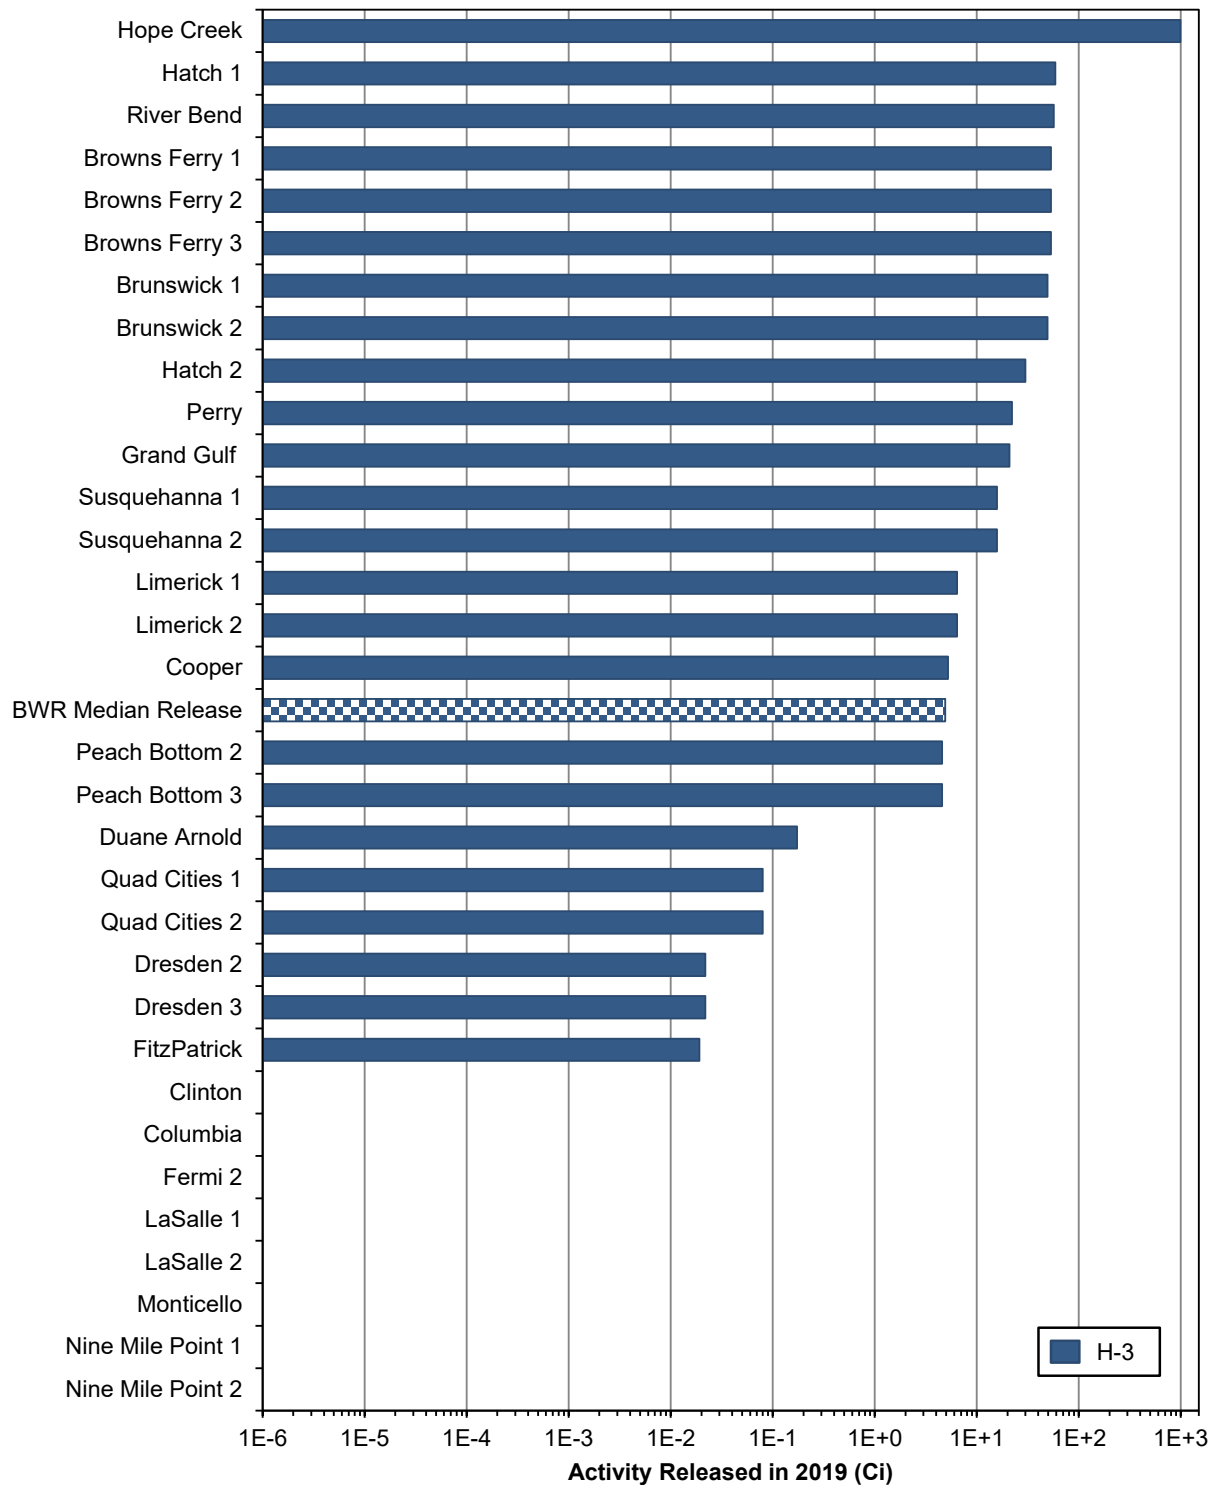



Figure 3.12 BWR Liquid Releases — Tritium

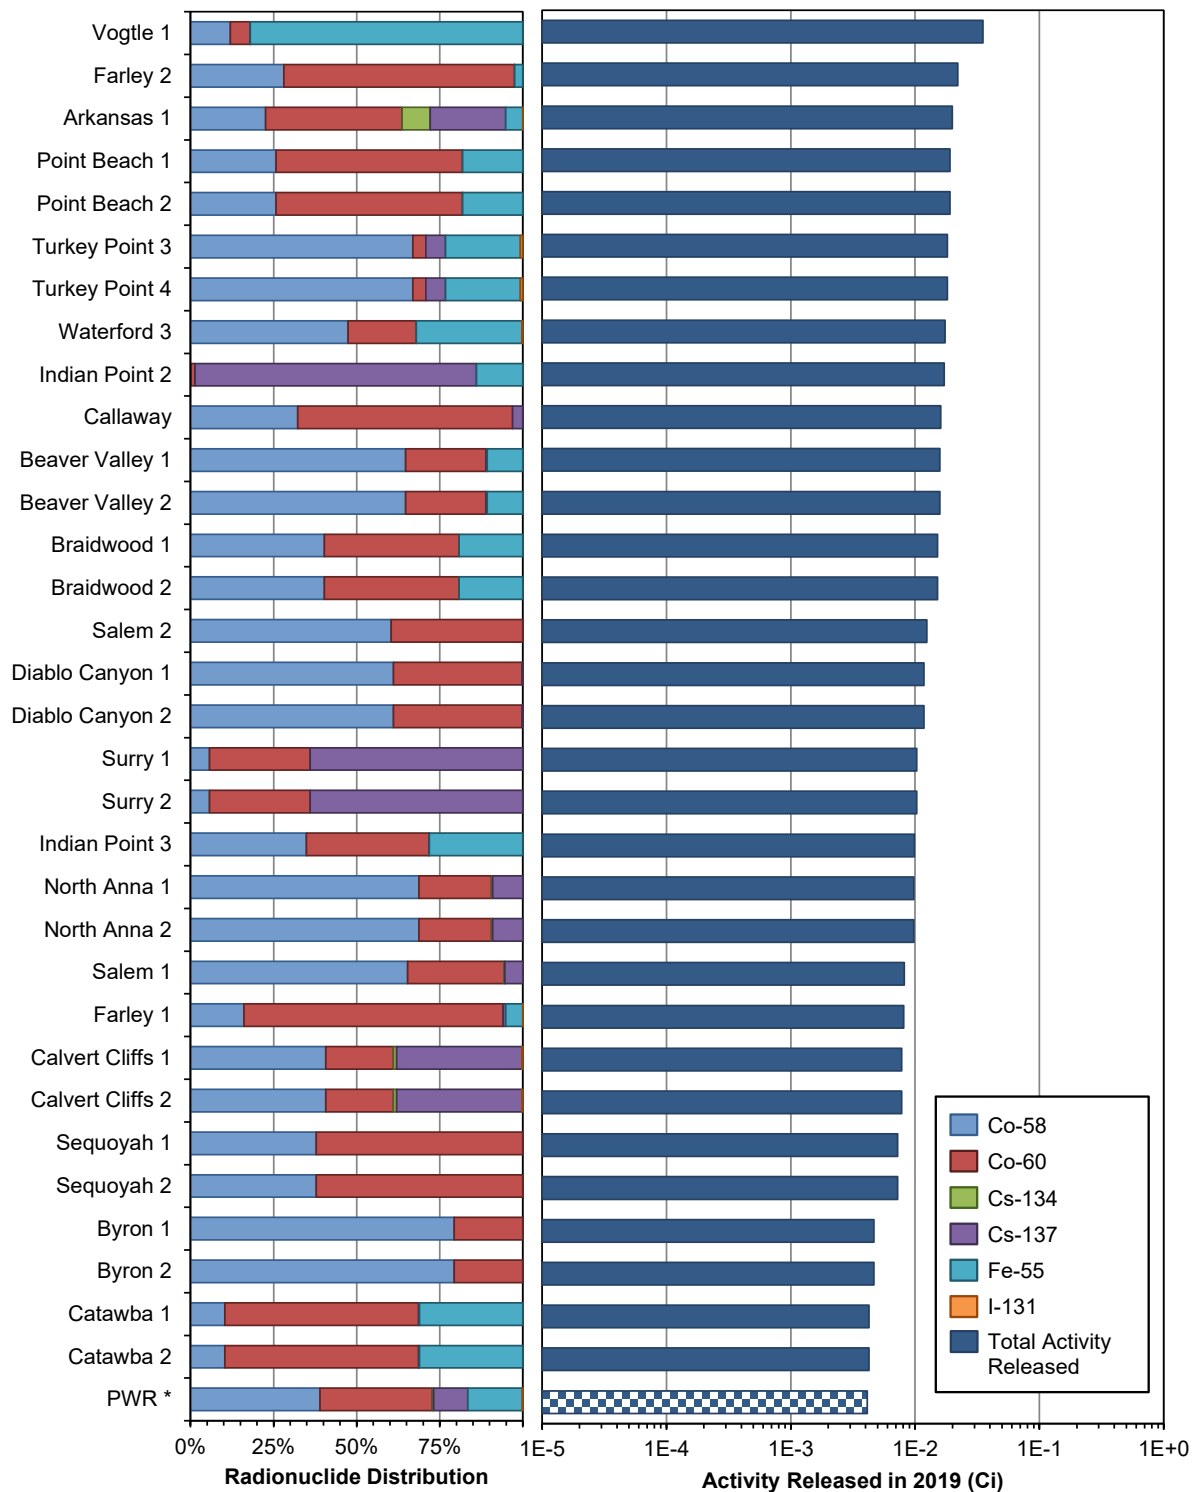

* PWR average radionuclide mix and median activity released

Figure 3.13 PWR Liquid Releases — Fission and Activation Products

(continued on the following page)

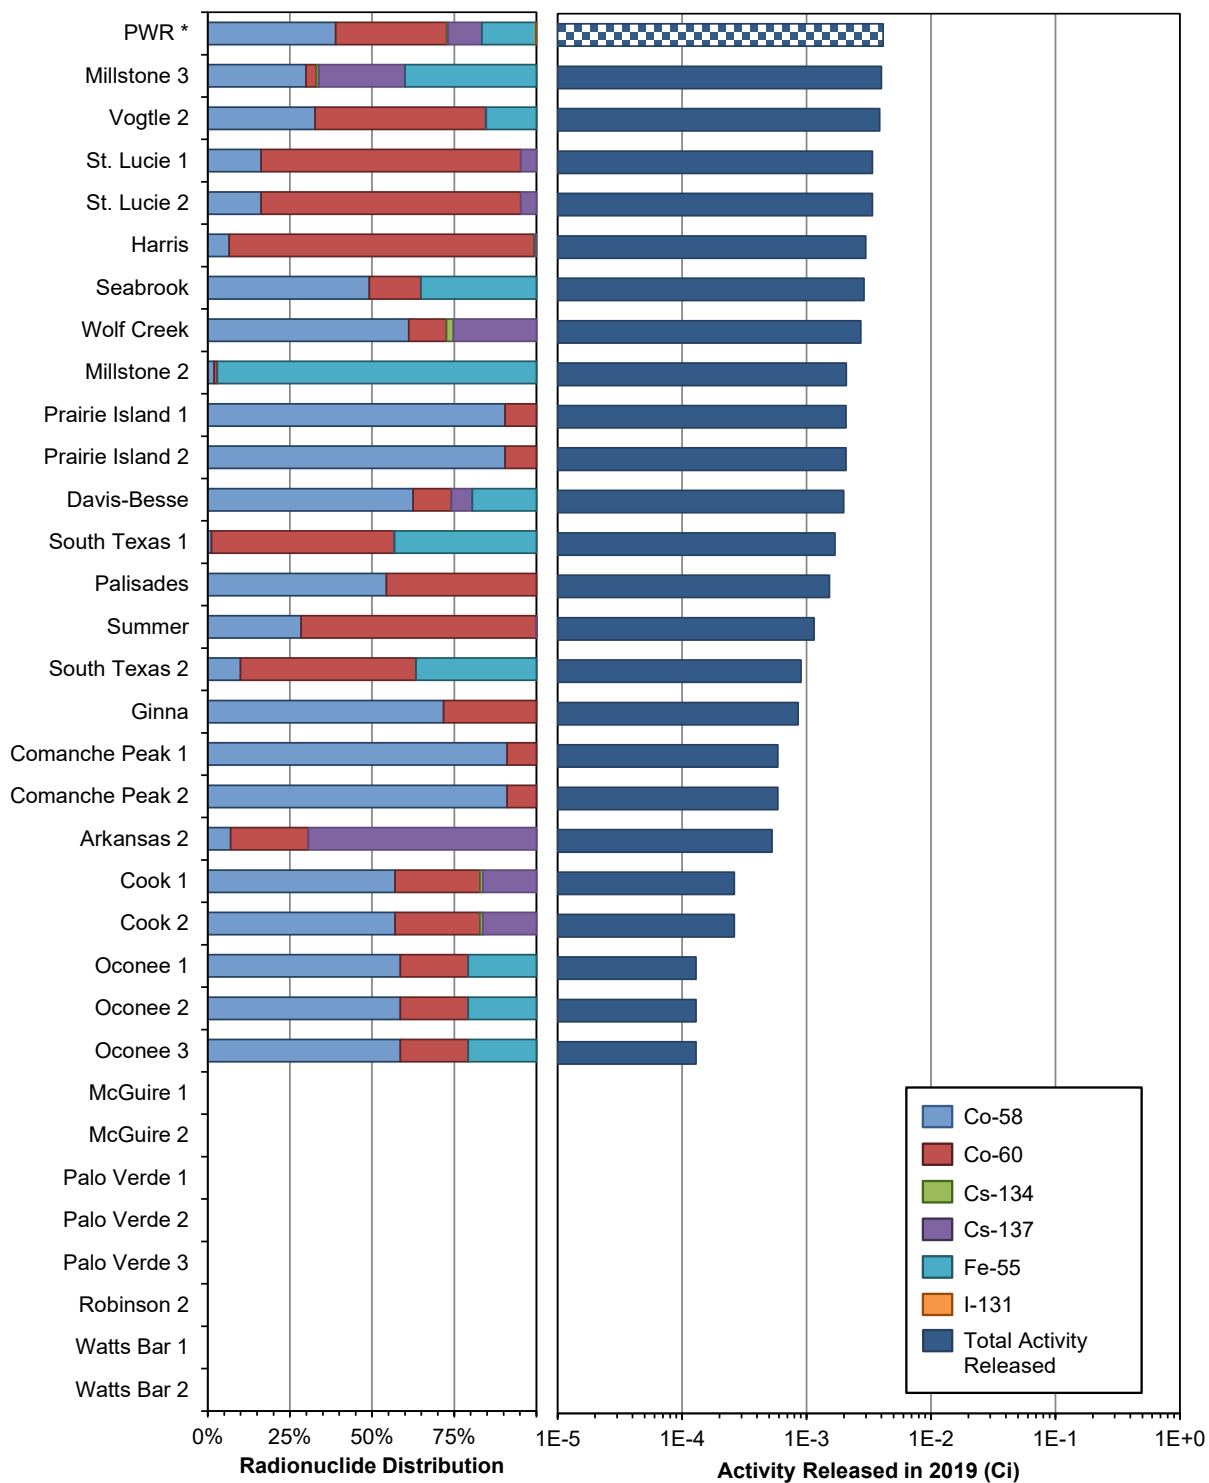

* PWR average radionuclide mix and median activity released

Figure 3.13 PWR Liquid Releases — Fission and Activation Products (continued)

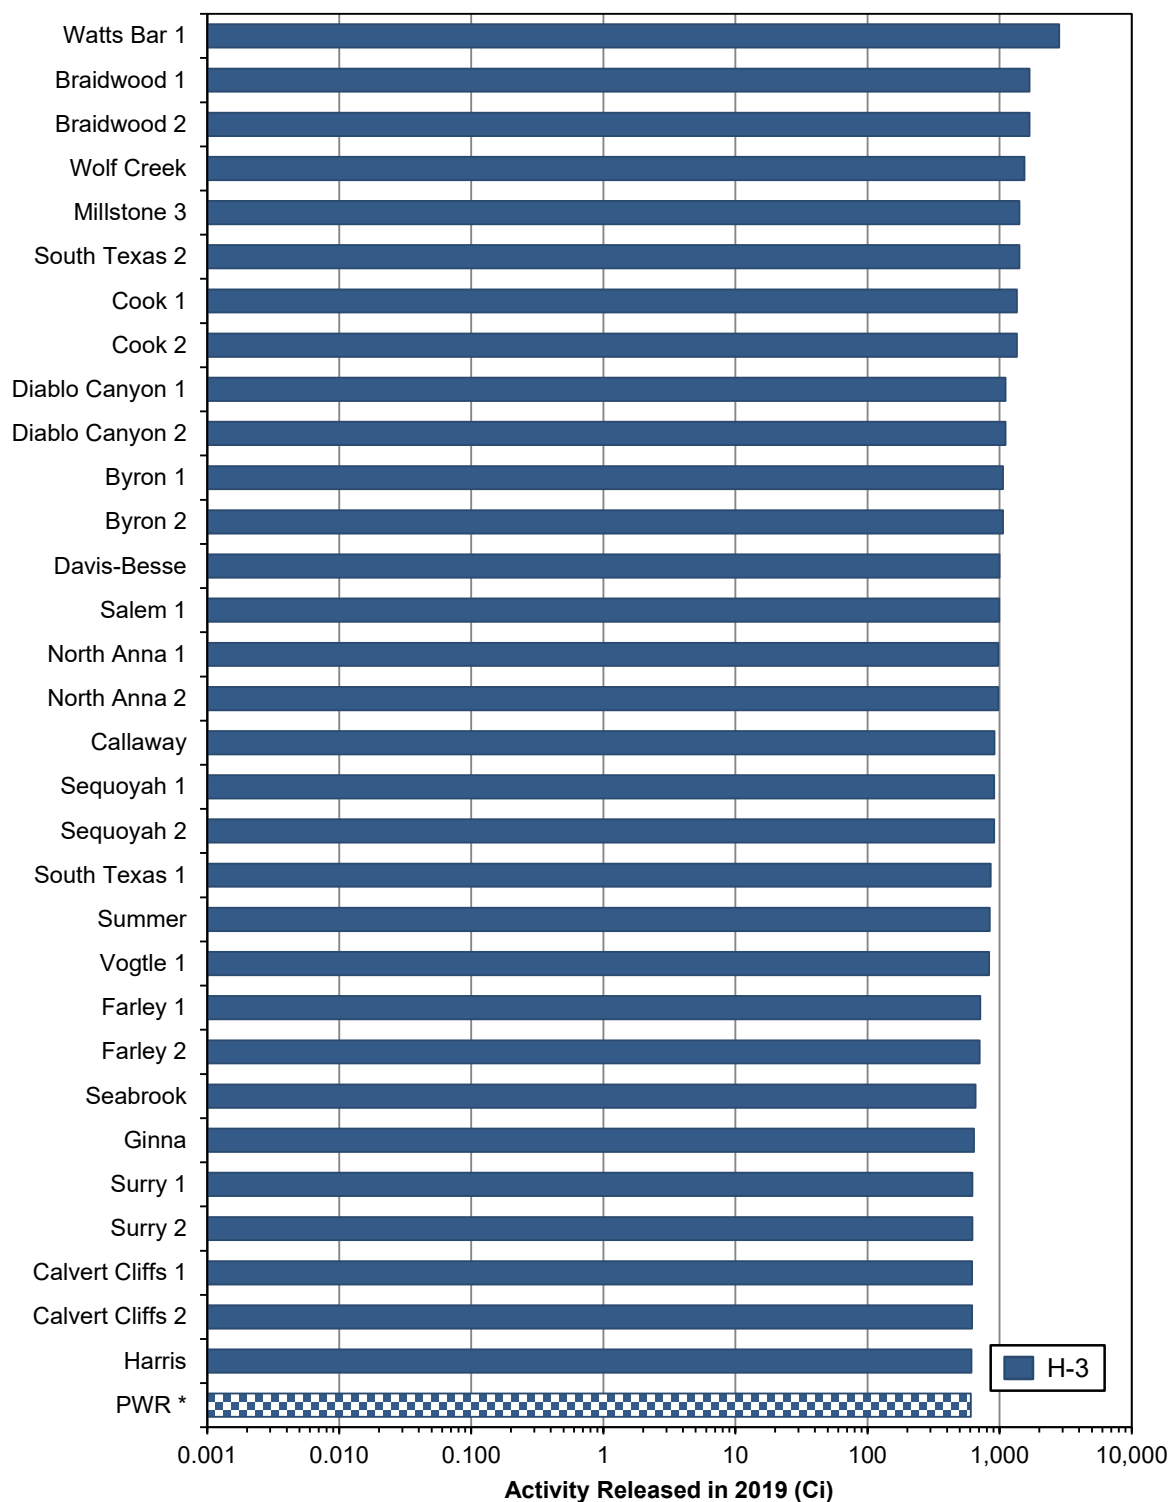


Figure 3.14 PWR Liquid Releases — Tritium

(continued on the following page)

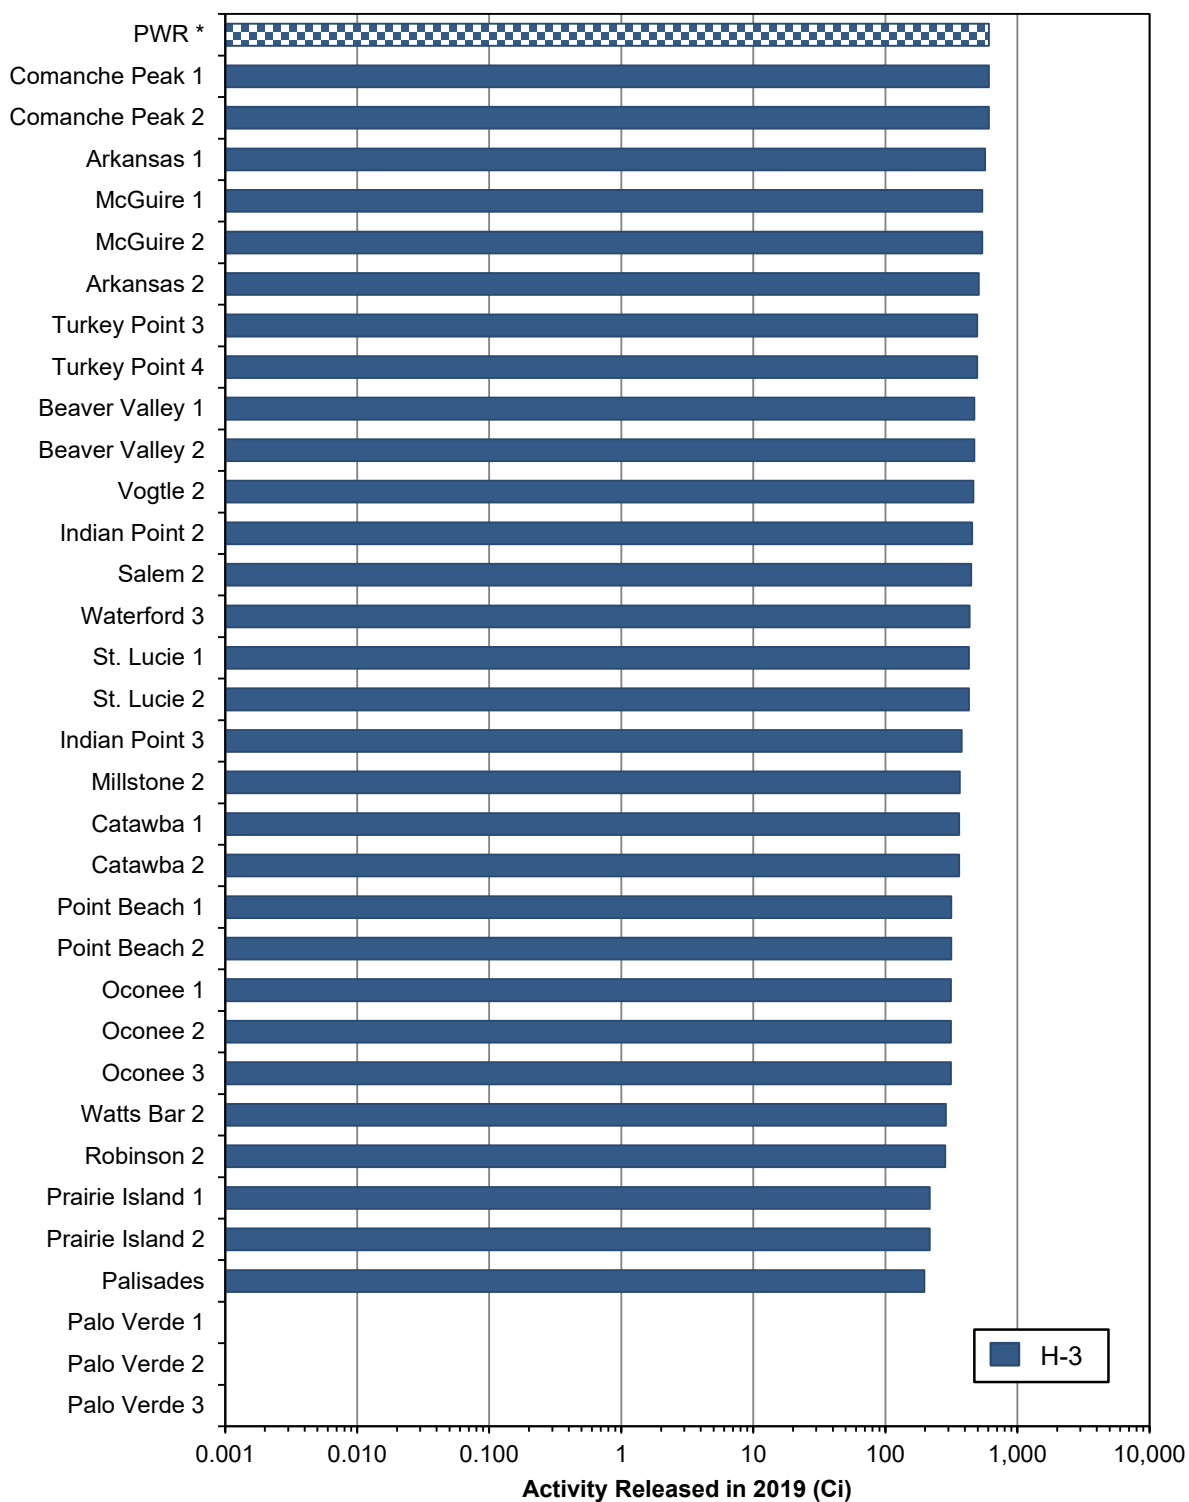


Figure 3.14 PWR Liquid Releases — Tritium (continued)

3.2 Short-Term Trend in Gaseous Effluents

In the previous section, only the significant radionuclides from each of the categories in Table 2.1 were shown in the tables and figures. Although particular focus on the significant radionuclides yields useful information, there are also less-significant radionuclides present in radioactive gaseous effluents. This section provides the reader with information to gain a better understanding of the total releases of gaseous effluents from a facility.

A long-standing, historical measure of the licensee's ability to control gaseous effluents is based on the activities of noble gases discharged in gaseous effluents. This category of radionuclides—noble gases—is described in Table 2.1. The noble gases category includes all radionuclides in gaseous effluents except iodines, particulates, carbon-14 (C-14), tritium, and alpha activity. Although the doses from noble gases are generally small, the activity and doses from other radionuclides (such as iodines and mixed fission and activation products) will generally only be elevated if the activity of noble gases is elevated. As a result, a plant's total noble gas release is sometimes used as a leading indicator of fuel integrity and the quality of a plant's gaseous radiological effluent control program. However, the amount of C-14 released as a gaseous effluent is directly related to the amount of power produced rather than to the quality of a plant's effluent control program.

Tables 3.15 and 3.16 show the short-term trend in the total activity of all noble gases in gaseous effluents for the last 5 years for BWRs and PWRs, respectively. The facilities are listed in alphabetical order for ease of reference when searching for a site.

Table 3.15 shows that the discharges of noble gases from all operating BWRs in 2019 ranged from a low of 0 curies to a maximum of 394.3 curies, with a median value of 41.3 curies. Table 3.16 shows that the discharge of noble gases from all PWRs in 2019 ranged from a low of 0 curies to a maximum of 153 curies, with a median value of 0.6 curies.

Fluctuations in the short-term data are within the range of expected values, based on power production and the increasing sensitivity of measurement techniques. For example, a plant that has an extremely sensitive measurement capability is capable of detecting extremely low concentrations of noble gas. For a plant with extremely sensitive measurement capability, due to the large amount of air discharged from the ventilation system, the plant is likely to report a discharge of noble gas. Meanwhile, a plant with a slightly less sensitive measurement capability may not be detecting the same extremely low concentration of noble gas and, thus, may report a low or zero discharge of noble gas. Overall, the nuclear power industry has steadily reduced the amount of radioactivity discharged into the environment (see Section 3.3 for the long-term trend in gaseous effluents).

Table 3.15 Short-Term Trend in Noble Gases in Gaseous Effluents, BWRs, Curies (Ci)
Shown in Alphabetical Order

Facility	2015	2016	2017	2018	2019
Browns Ferry 1	0.0	0.0	0.0	0.0	41.9
Browns Ferry 2	0.0	0.0	0.0	0.0	41.9
Browns Ferry 3	0.0	0.0	0.0	0.0	41.9
Brunswick 1	94.4	90.1	121.3	225.7	221.2
Brunswick 2	94.4	90.1	121.3	225.7	221.2
Clinton	15.7	27.3	55.7	66.8	187.4
Columbia	36.9	164.3	205.7	114.7	121.3
Cooper	2.1	2.2	1.6	22.7	8.4
Dresden 2	48.1	16.9	20.0	51.7	394.3
Dresden 3	123.4	45.0	29.0	29.3	40.0
Duane Arnold	40.7	137.3	25.2	20.1	9.9
Fermi 2	4.4	45.5	4.6	8.4	0.0
FitzPatrick	48.4	66.4	420.2	725.9	40.6
Grand Gulf	479.9	295.1	397.6	499.3	267.9
Hatch 1	4.6	3.4	4.7	1.1	1.8
Hatch 2	4.6	4.7	3.5	0.9	1.7
Hope Creek	37.8	1.4	0.0	2.0	31.6
LaSalle 1	1,493.0	1,469.5	785.5	501.5	147.3
LaSalle 2	1,493.0	1,469.5	785.5	501.5	147.3
Limerick 1	42.3	72.9	17.9	32.5	7.0
Limerick 2	42.3	72.9	17.9	32.5	7.0
Monticello	558.6	759.0	617.0	312.8	181.5
Nine Mile Point 1	0.0	0.0	0.0	0.0	0.0
Nine Mile Point 2	1.6	0.1	2.2	42.3	85.8
Oyster Creek	41.3	103.6	65.7		
Peach Bottom 2	305.5	276.9	249.4	447.0	312.5
Peach Bottom 3	305.5	276.9	249.4	447.0	312.5
Perry	55.8	0.7	0.9	0.0	0.0
Pilgrim	2.0	0.2	0.0	0.0	
Quad Cities 1	62.6	81.9	62.0	54.0	32.1
Quad Cities 2	62.6	81.9	62.0	54.0	32.1
River Bend	840.0	418.4	832.4	961.1	259.7
Susquehanna 1	0.0	76.3	61.7	0.0	0.0
Susquehanna 2	0.0	76.3	61.7	0.0	0.0
MEDIAN	41.8	72.9	42.3	32.5	41.3

Note: Data for the years 2018–2019 does not include Oyster Creek, which closed on September 17, 2018. Data for the year 2019 does not include Pilgrim, which closed on May 31, 2019.

Table 3.16 Short-Term Trend in Noble Gases in Gaseous Effluents, PWRs, Curies (Ci)
Shown in Alphabetical Order

Facility	2015	2016	2017	2018	2019
Arkansas 1	0.0	15.2	0.0	11.9	0.0
Arkansas 2	87.5	13.2	8.9	15.0	0.1
Beaver Valley 1	2.5	0.1	0.1	0.1	0.6
Beaver Valley 2	2.5	0.1	0.1	0.1	0.6
Braidwood 1	0.1	0.1	0.2	0.2	0.4
Braidwood 2	0.1	0.1	0.2	0.2	0.4
Byron 1	20.9	0.8	0.4	0.7	0.3
Byron 2	0.4	0.7	0.5	0.7	0.3
Callaway	0.4	0.8	0.7	0.3	0.3
Calvert Cliffs 1	5.2	1.6	0.1	0.4	3.4
Calvert Cliffs 2	5.2	1.6	0.1	0.4	3.4
Catawba 1	19.2	2.0	2.9	2.7	4.1
Catawba 2	19.2	2.0	2.9	2.7	4.1
Comanche Peak 1	0.3	0.2	0.2	0.2	0.2
Comanche Peak 2	0.3	0.2	0.2	0.2	0.2
Cook 1	1.0	11.5	1.8	1.0	0.7
Cook 2	1.0	11.5	1.8	1.0	0.7
Davis-Besse	0.3	0.1	0.0	0.2	0.0
Diablo Canyon 1	0.4	0.1	0.4	0.6	0.6
Diablo Canyon 2	0.4	0.1	0.4	0.6	0.6
Farley 1	3.6	4.1	37.6	10.0	2.1
Farley 2	6.6	4.0	3.3	1.3	5.8
Ft. Calhoun	1.3				
Ginna	7.3	0.8	3.5	1.3	1.6
Harris	0.4	0.1	0.3	0.1	0.0
Indian Point 2	0.2	0.2	0.6	0.4	0.2
Indian Point 3	0.8	0.2	0.4	0.1	0.2
McGuire 1	0.9	1.1	0.8	1.2	1.0
McGuire 2	0.9	1.1	0.8	1.2	1.0
Millstone 2	2.3	0.5	0.3	0.6	0.2
Millstone 3	0.9	1.0	1.0	1.8	0.7
North Anna 1	0.4	0.5	0.2	0.7	1.8
North Anna 2	0.4	0.5	0.2	0.7	1.8

Note: Median data for the years 2015 include effluent data for Ft. Calhoun, which ceased operations in 2016. Median data for the years 2017–2019 include effluent data for Watts Bar Unit 2, which began operations in October 2016. Data for the year 2019 does not include Three Mile Island 1, which closed on September 20, 2019.

(continued on the following page)

Table 3.16 Short-Term Trend in Noble Gases in Gaseous Effluents, PWRs, Curies (Ci)
(continued)
Shown in Alphabetical Order

Facility	2015	2016	2017	2018	2019
Oconee 1	2.2	7.0	2.6	0.6	2.9
Oconee 2	2.2	7.0	2.6	0.6	2.9
Oconee 3	2.2	7.0	2.6	0.6	2.9
Palisades	10.8	8.7	22.6	28.3	7.5
Palo Verde 1	0.2	0.7	0.5	0.2	0.6
Palo Verde 2	2.4	0.3	2.9	1.3	0.2
Palo Verde 3	0.3	0.3	0.3	0.5	0.7
Point Beach 1	0.4	0.3	0.3	0.3	0.3
Point Beach 2	0.4	0.3	0.3	0.3	0.3
Prairie Island 1	0.1	0.0	0.1	0.0	0.0
Prairie Island 2	0.1	0.0	0.1	0.0	0.0
Robinson 2	6.3	0.2	1.9	0.3	0.2
Salem 1	0.3	11.2	0.1	0.2	0.3
Salem 2	0.2	0.2	0.3	0.4	0.2
Seabrook	0.1	0.0	1.2	1.1	0.1
Sequoyah 1	43.0	63.0	20.5	2.2	2.6
Sequoyah 2	43.0	63.0	20.5	2.2	2.6
South Texas 1	1.7	1.8	1.4	1.8	1.6
South Texas 2	5.1	1.7	1.8	2.4	4.4
St. Lucie 1	3.0	15.5	40.5	15.2	14.7
St. Lucie 2	18.2	4.5	40.5	4.2	1.5
Summer	0.1	0.0	0.1	0.5	5.3
Surry 1	0.7	1.4	37.9	5.7	0.1
Surry 2	0.7	1.4	37.9	5.7	0.1
Three Mile Island 1	1.7	23.0	82.6	1.0	
Turkey Point 3	0.2	0.1	1.5	0.2	0.0
Turkey Point 4	0.1	0.1	1.4	0.0	0.0
Vogtle 1	2.0	0.2	0.3	69.8	150.8
Vogtle 2	0.2	4.4	1.3	0.6	1.9
Waterford 3	0.4	0.0	0.7	0.4	3.0
Watts Bar 1	10.0	36.0	18.0	12.1	153.0
Watts Bar 2			18.0	0.1	16.8
Wolf Creek	0.4	0.3	3.4	25.9	1.6
MEDIAN	0.9	0.8	0.8	0.6	0.6

Note: Median data for the years 2015 include effluent data for Ft. Calhoun, which ceased operations in 2016. Median data for the years 2017–2019 include effluent data for Watts Bar Unit 2, which began operations in October 2016. Data for the year 2019 does not include Three Mile Island 1, which closed on September 20, 2019.

3.3 Long-Term Trend in Gaseous Effluents

NRC regulations (10 CFR 50.36a) (Ref. [1]) require NPPs to keep the release of radioactive effluents ALARA. As a result of improved radioactive effluent control programs, the amount of activity of radioactive effluents has steadily decreased over time. The downward trend in the median noble gas activity of gaseous effluents since 1975 is shown in Figure 3.15. All power reactors that have operated in the United States are included, some of which are now shut down.

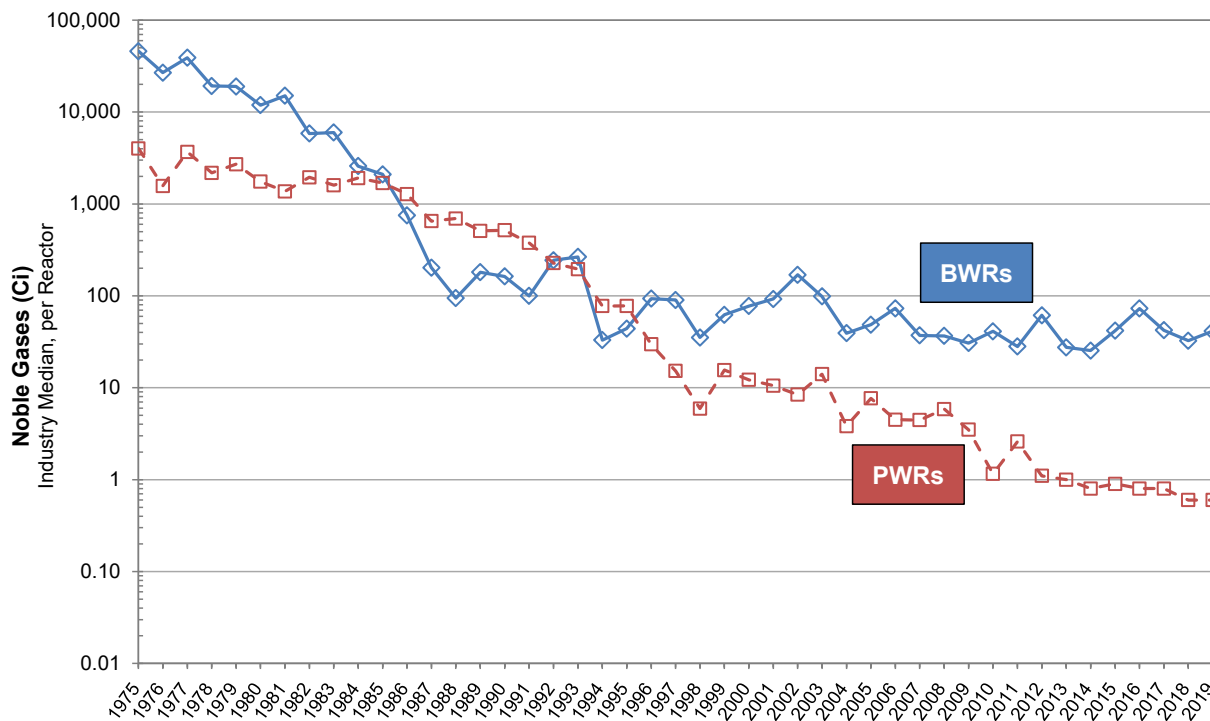


Figure 3.15 Long-Term Trend in Noble Gases in Gaseous Effluents

Figure 3.15 indicates a long-term, downward trend in the median amount of noble gases in gaseous effluents from both BWRs and PWRs. The magnitude of the reduction is significant. For example, in 1975, the median release for BWRs was greater than 40,000 curies; however, in 2019, the median was 41.3 curies. That change corresponds to a 99.9 percent reduction in noble gas effluents over the last 44 years.

One of the primary contributors to the reduction in noble gas effluents is improved fuel integrity in both BWRs and PWRs. The use of advanced off-gas systems in BWRs is also responsible for reductions in the BWR industry averages. Lastly, contributions from the operations, maintenance, chemistry, and health physics departments at the various facilities have improved the handling and processing of gaseous waste to further reduce the amount of noble gas effluents.

3.4 Short-Term Trend in Liquid Effluents

In Section 3.1, only the significant radionuclides discharged in gaseous and liquid effluents were shown in the tables and figures. Although particular focus on the significant radionuclides yields useful information, there are also less-significant radionuclides present in radioactive liquid effluents. This section provides the reader with a tool to gain a better understanding of the total releases of liquid effluents from a facility.

An indicator of the licensee's ability to control liquid effluents is based on the activity of the mixed fission and activation products (MFAP) discharged in liquid effluents. This category of radionuclides—MFAP—is described in Table 2.2. It includes all radionuclides in liquid effluents except tritium, C-14, noble gases, and gross alpha activity. MFAP can be effectively reduced by improved fuel integrity and source term reduction programs, as well as by improved liquid radioactive waste treatment systems (e.g., ion exchange resins and filtration equipment). As a result, MFAP are sometimes used as a primary indicator of the overall control and handling of radioactive liquid effluents.

Tables 3.17 and 3.18 show the short-term trend in MFAP in liquid effluents for BWRs and PWRs, respectively. In these tables, all detected MFAP radionuclides are included. For each reactor, the activities of all MFAP are added together. In this way, the yearly total of all MFAP in liquid effluents from a reactor is represented by a single number.

The facilities are listed in alphabetical order for ease of reference when searching for a site. Fluctuations in these short-term data are within the range of expected values, based on power production and the increasing sensitivity of measurement techniques. Overall, the nuclear power industry has steadily reduced the amount of radioactivity discharged into the environment (see Section 3.5 for the long-term trend in liquid effluents).

Table 3.17 Short-Term Trend in Mixed Fission and Activation Products in Liquid Effluents, BWRs, millicuries (mCi)
Shown in Alphabetical Order

Facility	2015	2016	2017	2018	2019
Browns Ferry 1	124.1	45.8	1.3	133.9	77.6
Browns Ferry 2	124.1	45.8	1.3	133.9	77.6
Browns Ferry 3	124.1	45.8	1.3	133.9	77.6
Brunswick 1	3.7	3.5	3.5	3.0	1.1
Brunswick 2	3.7	3.5	3.5	3.0	1.1
Clinton	0.0	0.0	0.0	0.0	0.0
Columbia	0.0	0.0	0.0	0.0	0.0
Cooper	0.0	0.0	0.0	15.5	4.6
Dresden 2	0.0	0.0	0.0	0.0	0.0
Dresden 3	3.2	0.0	0.0	0.0	0.0
Duane Arnold	0.0	0.0	0.0	0.0	0.0
Fermi 2	0.0	0.0	0.0	0.0	0.0
FitzPatrick	0.0	0.0	0.0	0.3	0.0
Grand Gulf	12.7	50.6	41.5	42.2	13.7
Hatch 1	7.1	2.6	0.8	1.3	1.8
Hatch 2	3.8	0.6	0.7	0.9	1.6
Hope Creek	38.8	3.3	0.7	77.1	16.6
LaSalle 1	0.0	0.0	0.0	0.0	0.0
LaSalle 2	0.0	0.0	0.0	0.0	0.0
Limerick 1	2.9	0.4	1.2	0.8	5.1
Limerick 2	2.9	0.4	1.2	0.8	5.1
Monticello	0.0	0.0	0.1	0.0	0.0
Nine Mile Point 1	0.0	0.0	0.0	0.0	0.0
Nine Mile Point 2	0.0	0.0	0.0	0.0	0.0
Oyster Creek	0.0	0.0	0.0		
Peach Bottom 2	6.3	2.1	2.1	2.3	5.4
Peach Bottom 3	6.3	2.1	2.1	2.3	5.4
Perry	14.9	16.8	62.5	0.0	33.3
Pilgrim	0.7	0.0	0.0	0.0	
Quad Cities 1	1.9	0.0	0.0	20.3	0.0
Quad Cities 2	1.9	0.0	0.0	20.3	0.0
River Bend	3.0	6.3	15.8	9.1	15.1
Susquehanna 1	13.7	4.9	0.2	4.1	30.0
Susquehanna 2	13.7	4.9	0.2	4.1	30.0
MEDIAN	2.9	0.2	0.2	0.9	1.4

Note: Median data for the years 2018–2019 does not include Oyster Creek, which closed on September 17, 2018. Data for the year 2019 does not include Pilgrim, which closed on May 31, 2019.

Table 3.18 Short-Term Trend in Mixed Fission and Activation Products in Liquid Effluents, PWRs, millicuries (mCi)
Shown in Alphabetical Order

Facility	2015	2016	2017	2018	2019
Arkansas 1	85.5	151.1	82.8	45.3	31.2
Arkansas 2	3.9	18.3	14.5	4.5	0.9
Beaver Valley 1	117.6	42.1	35.4	36.4	24.4
Beaver Valley 2	117.6	42.1	35.4	36.4	24.4
Braidwood 1	66.3	14.9	46.0	24.0	21.9
Braidwood 2	66.3	14.9	46.0	24.0	21.9
Byron 1	4.7	8.0	9.9	10.2	5.9
Byron 2	4.7	8.0	9.9	10.2	5.9
Callaway	39.5	66.6	46.3	32.8	43.7
Calvert Cliffs 1	327.1	49.1	1.9	2.6	9.0
Calvert Cliffs 2	327.1	49.1	1.9	2.6	9.0
Catawba 1	13.0	6.5	7.1	29.7	9.3
Catawba 2	13.0	6.5	7.1	29.7	9.3
Comanche Peak 1	0.9	1.0	0.5	0.2	0.7
Comanche Peak 2	0.9	1.0	0.5	0.2	0.7
Cook 1	1.5	0.7	1.5	0.4	0.5
Cook 2	1.5	0.7	1.5	0.4	0.5
Davis-Besse	5.8	39.1	0.3	0.6	3.5
Diablo Canyon 1	10.8	15.3	11.8	9.9	16.3
Diablo Canyon 2	10.8	15.3	11.8	9.9	16.3
Farley 1	54.3	50.3	48.6	147.3	13.0
Farley 2	72.0	66.5	71.0	118.6	29.1
Ft. Calhoun	12.1				
Ginna	5.7	1.1	5.9	13.9	2.4
Harris	18.0	19.7	6.7	7.9	5.9
Indian Point 2	35.7	110.8	39.9	80.4	20.8
Indian Point 3	40.9	26.6	40.0	9.6	18.1
McGuire 1	34.7	8.9	10.3	6.2	20.3
McGuire 2	34.7	8.9	10.3	6.2	20.3
Millstone 2	15.6	1.1	11.3	1.0	2.5
Millstone 3	42.3	75.6	2.2	14.3	4.6
North Anna 1	8.5	17.1	7.4	11.3	10.7
North Anna 2	8.5	17.1	7.4	11.3	10.7

Note: Median data for the years 2015 include effluent data for Ft. Calhoun, which ceased operations in 2016. Median data for the years 2017–2019 include effluent data for Watts Bar Unit 2, which began operations in October 2016. Data for the year 2019 does not include Three Mile Island 1, which closed on September 20, 2019.

(continued on the following page)

Table 3.18 Short-Term Trend in Mixed Fission and Activation Products in Liquid Effluents, PWRs, millicuries (mCi) (continued)
Shown in Alphabetical Order

Facility	2015	2016	2017	2018	2019
Oconee 1	1.4	2.3	0.4	1.4	0.2
Oconee 2	1.4	2.3	0.4	1.4	0.2
Oconee 3	1.4	2.3	0.4	1.4	0.2
Palisades	3.1	2.9	12.6	15.2	6.7
Palo Verde 1	0.0	0.0	0.0	0.0	0.0
Palo Verde 2	0.0	0.0	0.0	0.0	0.0
Palo Verde 3	0.0	0.0	0.0	0.0	0.0
Point Beach 1	25.8	47.2	36.8	47.8	48.1
Point Beach 2	25.8	47.2	36.8	47.8	48.1
Prairie Island 1	6.7	9.1	11.6	3.3	2.7
Prairie Island 2	6.7	9.1	11.6	3.3	2.7
Robinson 2	37.6	6.9	20.3	13.6	5.2
Salem 1	7.7	12.2	2.2	15.9	8.3
Salem 2	6.9	6.2	12.6	19.6	13.1
Seabrook	6.9	13.1	10.1	12.1	7.0
Sequoyah 1	46.5	20.7	21.1	20.9	21.4
Sequoyah 2	46.5	20.7	21.1	20.9	21.4
South Texas 1	12.7	8.0	10.4	5.7	5.6
South Texas 2	4.5	8.2	2.8	5.7	4.4
St. Lucie 1	12.5	22.7	15.3	32.2	23.2
St. Lucie 2	12.5	22.7	15.3	32.2	23.2
Summer	10.1	7.6	15.5	14.7	2.9
Surry 1	24.8	5.7	4.9	19.5	11.1
Surry 2	24.8	5.7	4.9	19.5	11.1
Three Mile Island 1	0.2	0.6	0.5	0.3	
Turkey Point 3	54.8	44.4	67.2	54.9	34.8
Turkey Point 4	54.9	44.4	67.2	54.9	34.8
Vogtle 1	53.8	23.6	21.4	14.5	39.9
Vogtle 2	19.1	13.4	17.8	7.8	5.2
Waterford 3	33.8	11.7	17.5	25.9	26.2
Watts Bar 1	16.8	11.8	12.6	4.7	0.0
Watts Bar 2			12.6	4.7	0.0
Wolf Creek	11.8	25.5	6.1	6.1	14.9
MEDIAN	12.7	13.1	10.9	11.3	9.1

Note: Median data for the years 2015 include effluent data for Ft. Calhoun, which ceased operations in 2016. Median data for the years 2017–2019 include effluent data for Watts Bar Unit 2, which began operations in October 2016. Data for the year 2019 does not include Three Mile Island 1, which closed in September 20, 2019.

3.5 Long-Term Trend in Liquid Effluents

This section discusses the long-term trend of MFAP in liquid effluents from nuclear power plants in the United States. NRC regulations require NPPs to keep the release of radioactive effluents ALARA. As a result of improvements in fuel integrity, source term reduction programs and radioactive effluent control programs, the amount of activity of radioactive effluents has steadily decreased over time. The trend in the median MFAP activity of liquid effluents since 1975 is shown in Figure 3.16. All power reactors that have operated in the United States are included, some of which are now shut down.

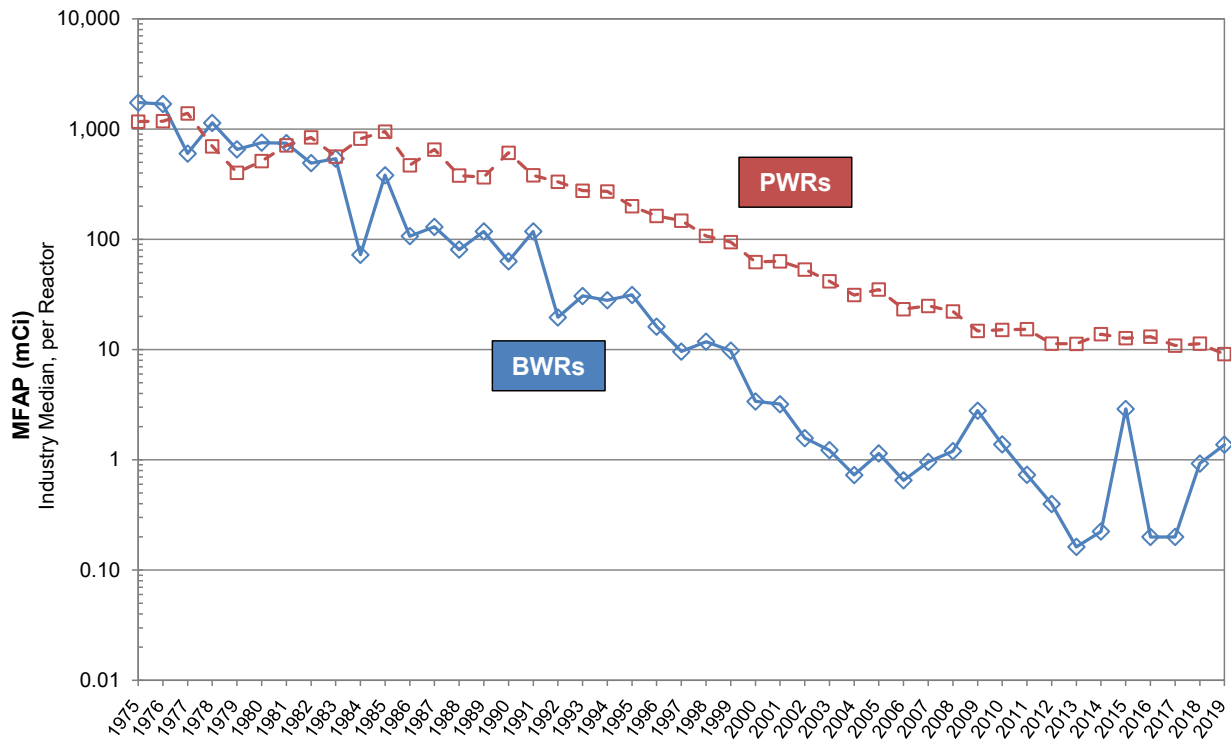


Figure 3.16 Long-Term Trend in MFAP in Liquid Effluents

Figure 3.16 indicates a long-term, downward trend in the amounts of MFAP in liquid effluents from both BWRs and PWRs. The magnitude of the reduction is significant. For example, in 1975, the median activity of liquid effluents from BWRs was greater than 1,500 millicuries; however, in 2019, the median was 1.4 millicuries. That corresponds to a 99.9 percent reduction in MFAP in liquid effluents over the last 44 years.

One of the primary contributors to the reduction of MFAP in liquid effluents is improved fuel integrity in both BWRs and PWRs. The use of advanced liquid radioactive waste processing systems has also significantly lowered the amount of MFAP in liquid effluents. Furthermore, improvements in the handling and processing of liquid waste made by the operations, maintenance, chemistry, and health physics departments at the various facilities have further reduced the amount of effluent releases and public dose.

Because BWRs do not use boron in reactor water, many BWRs recycle (or re-use) some or all of the reactor water. The recycling (or re-use) of reactor water contributes to lowering the amount of MFAP in BWR liquid effluent releases, particularly for tritium. The recycling of reactor water at BWRs also allows some BWRs to operate with a zero liquid-release strategy that results in the release of tritium as a gaseous effluent instead of a liquid effluent. The recycling of reactor water at BWRs is one reason why the amount of MFAP in liquid effluents from BWRs is generally lower than from PWRs. However, the PWR design requires the use of boron in the reactor water, which makes water reuse impractical and results in a higher amount of MFAP in liquid effluents.

A comparison of doses from gaseous and liquid effluents can be made by examining Figures 3.21 and 3.22; which shows, in general, that most of the dose from NPP effluents comes from the gaseous effluents. As a result, licensees may focus additional efforts on reducing the radionuclides in gaseous effluents.

The zero liquid-release strategy, combined with improved fuel performance and advanced waste processing systems, is responsible for the decreases in the median MFAP liquid activity releases during the 1980s, 1990s, and beyond 2000, which can be seen in Figure 3.16. However, at those sites using a zero liquid-release strategy, the tritium is released as a gaseous effluent (rather than as a liquid effluent), and consequently, has the potential to result in a small increase in dose to members of the public. This small increase in public dose, due to release of tritium as a gaseous effluent instead of as a liquid effluent, can be attributed to four factors:

- Waste water in some plants has been recycled (instead of discharged as a liquid effluent).
- As waste water is recycled, the tritium concentration in the water increases over time.
- When all radioactive liquid releases are eliminated, tritium is released through the gaseous release points instead of as a liquid release.
- The dose due to tritium discharged from a gaseous release point can, depending on plant design and site characteristics, be higher than the dose from the same amount of tritium discharged from a liquid release point.

However, a plant that allows some liquid effluent releases can shift the release of tritium from a gaseous release point to a liquid release point, thereby lowering public doses. This strategy can cause a slight increase in the amount of activity of MFAP in liquid effluents and a small decrease in public dose.

3.6 Radiation Doses from Gaseous and Liquid Effluents

In accordance with regulatory requirements and the calculation methodologies of RG 1.109 (Ref. [4]), the doses are calculated for either real or hypothetical individuals receiving the highest total body and organ doses. As a result, these doses are often referred to as the maximum total body and the maximum organ doses. Additionally, licensees are required to calculate the organ doses for six separate organs in the human body: bone, liver, thyroid, kidney, lung, and intestines. Only the highest of the organ doses is shown in this report. Because these doses are calculated for the individual receiving the highest dose from gaseous and liquid effluents, these individuals are typically located in close proximity to the facility. As a result, doses to other individuals, especially those located farther away from the facility, are significantly less than those shown in this report.

The maximum annual organ doses for 2019 from gaseous and liquid effluents are shown in Tables 3.19 through 3.22. The data from these tables are illustrated graphically in Figures 3.17 through

3.20. These tables and figures contain annual organ doses (for gaseous and liquid effluents) and annual total body doses (for liquid effluents).

The NRC ALARA criteria, discussed in Section 2.4, are included in the tables and figures for purposes of comparison. Because many plants have more than one operating reactor, the ALARA criteria are shown on a per reactor basis.

If the licensee does not report a dose, a blank entry is used to indicate that either (1) no releases occurred or (2) no exposure pathway exists. Also, blanks in data fields are generally used instead of zeros in order to make it easier for the reader to quickly identify the positive values.

The doses shown in the tables and graphs of this section include contributions from all radionuclides for the type of effluent shown (i.e., gaseous or liquid). For gaseous effluents, the majority of the dose is from C-14 due to assumed consumption of garden vegetables grown locally.

The release of C-14 from NPPs is insignificant compared to the natural production and world inventory of C-14 (Ref. [7]).

For comparison purposes, median of these maximum dose values are included in the tables and figures. The median is the midpoint of the data. Approximately half of the power plants will report doses greater than the median and approximately half will report doses lower than the median. The median is a method of estimating a central or typical value while avoiding bias caused by extremely high or low values in the data set. All sites are included when calculating the medians, even those sites for which no dose is reported.

For example, in Table 3.20, the median PWR maximum annual organ dose due to gaseous effluents is highlighted in bold at the top of the table. In this case, the median dose is 0.122 mrem. This represents the typical annual organ dose, due to all gaseous effluents, from all PWRs operating in the United States in 2019. Figures 3.21 and 3.22 show the 5-year trend in the median of all plants' maximum annual organ doses in gaseous and liquid effluents, respectively. The median organ doses for liquid effluents from BWRs and PWRs have remained consistently low between 2015 and 2019 as seen in Figure 3.22.

The tables in this section indicate that the highest total body dose from all of the facilities was 0.351 mrem (Table 3.22), and the highest organ dose from all of the facilities was 5.69 mrem (Table 3.19). For purposes of comparison, 1 mrem is less than the radiation dose from any one of the following:

- the dose received in 1 week from skiing in the Rocky Mountains;
- the dose received in 4 weeks from the natural potassium in each person's body; or
- the dose received in 8 weeks by a homeowner with a brick or stone house.

The basis for each of these three natural background dose values is based on information from the U.S. Geological Survey (USGS) (Ref. [8]). Radiation exposure to cosmic rays at the high altitudes of Colorado would result in a dose of about 70 mrem per year. Additionally, the dose from rocks and soil in the mountains of Colorado would be about 40 mrem per year. The total of these two values is about 110 mrem per year for a person in the high elevations of Colorado. A person in Florida, who is typically at sea level and surrounded by the native Florida terrain, would receive about 40 mrem per year from rocks, soil, and cosmic radiation. As a result, people living at the high altitudes of Colorado receive about 70 mrem per year more radiation dose than a person

living in Florida. People from Florida skiing in the Rocky Mountains for a week would be expected to receive an additional dose—above what they might normally have received if they had stayed in Florida—of about 1.3 mrem.

According to a DOE report prepared by the Pacific Northwest National Laboratory (Ref. [9]), the average individual receives about 1.1 mrem per month or 14 mrem per year from the natural potassium-40 that is incorporated into the human body.

NCRP Report No. 95 (Ref. [10]) indicates that the radiation exposure from living in a brick, stone, adobe, or concrete home is about 7 mrem per year. At this annual dose rate, the exposure received in 8 weeks would be about 1.1 mrem.

NPPs in the United States release small but measurable amounts of radioactive materials in radioactive effluents. All of these radioactive releases must comply with NRC requirements. These requirements are in place to ensure (1) the radwaste processing systems at NPPs are operating properly, (2) the doses to members of the public are within the public dose limits, and (3) the doses to members of the public are ALARA.

Table 3.19 BWR Gaseous Effluents — Maximum Annual Organ Dose, 2019
Shown in Descending Order of Organ Dose

BWR Facility	Annual Organ Dose (mrem)
Grand Gulf	5.69E+00
River Bend	4.70E+00
Brunswick 1	2.04E+00
Brunswick 2	2.04E+00
Susquehanna 2	1.13E+00
Nine Mile Point 1	8.82E-01
Nine Mile Point 2	8.82E-01
Cooper	8.46E-01
Fermi 2	6.66E-01
Limerick 1	6.30E-01
Limerick 2	6.30E-01
Duane Arnold	3.85E-01
Susquehanna 1	3.42E-01
Perry	2.35E-01
Columbia	2.18E-01
BWR Median Dose	1.59E-01
Hatch 1	1.59E-01
Hatch 2	1.59E-01
Peach Bottom 2	1.22E-01
Peach Bottom 3	1.22E-01
Hope Creek	1.11E-01
Quad Cities 1	1.10E-01
Quad Cities 2	1.10E-01
Dresden 2	8.18E-02
Browns Ferry 1	5.82E-02
Browns Ferry 2	5.82E-02
Browns Ferry 3	5.82E-02
LaSalle 1	5.54E-02
LaSalle 2	5.54E-02
Dresden 3	4.40E-02
Clinton	3.89E-02
FitzPatrick	3.41E-02
Monticello	3.00E-02
ALARA Criteria	15

Table 3.20 PWR Gaseous Effluents — Maximum Annual Organ Dose, 2019
Shown in Descending Order of Organ Dose

PWR Facility	Annual Organ Dose (mrem)	PWR Facility	Annual Organ Dose (mrem)
Wolf Creek	4.60E+00	PWR Median Dose	1.22E-01
Watts Bar 1	3.38E+00	Point Beach 1	1.22E-01
Watts Bar 2	3.19E+00	Point Beach 2	1.22E-01
Beaver Valley 1	2.50E+00	Oconee 1	1.17E-01
Beaver Valley 2	2.48E+00	Oconee 2	1.17E-01
Catawba 1	2.48E+00	Oconee 3	1.17E-01
Catawba 2	2.48E+00	Salem 2	1.17E-01
North Anna 1	1.62E+00	Turkey Point 4	1.13E-01
North Anna 2	1.62E+00	Palo Verde 2	1.12E-01
Braidwood 1	9.00E-01	Arkansas 2	1.09E-01
Braidwood 2	9.00E-01	Comanche Peak 1	1.09E-01
Cook 1	8.63E-01	Comanche Peak 2	1.09E-01
Cook 2	8.63E-01	Salem 1	9.35E-02
Sequoyah 1	7.95E-01	Arkansas 1	9.26E-02
Sequoyah 2	7.95E-01	Vogtle 1	8.46E-02
Davis-Besse	6.45E-01	Vogtle 2	8.46E-02
Robinson 2	5.79E-01	Palo Verde 1	7.87E-02
Farley 1	4.11E-01	Waterford 3	5.23E-02
Farley 2	4.11E-01	South Texas 1	5.09E-02
McGuire 1	3.60E-01	South Texas 2	5.09E-02
McGuire 2	3.60E-01	Surry 1	4.70E-02
Byron 1	3.59E-01	Surry 2	4.70E-02
Seabrook	3.44E-01	Prairie Island 1	3.26E-02
Byron 2	3.37E-01	Prairie Island 2	3.26E-02
Indian Point 2	3.26E-01	Callaway	2.15E-02
Indian Point 3	3.10E-01	Ginna	1.94E-02
Palo Verde 3	3.00E-01	Summer	1.87E-02
Harris	2.80E-01	Palisades	1.34E-02
Millstone 3	2.56E-01	Calvert Cliffs 1	1.29E-02
Millstone 2	2.36E-01	Calvert Cliffs 2	1.29E-02
Turkey Point 3	1.52E-01	Diablo Canyon 1	4.62E-03
		Diablo Canyon 2	4.62E-03
		St. Lucie 1	3.34E-03
		St. Lucie 2	2.97E-03
		ALARA Criteria	15

Table 3.21 BWR Liquid Effluents — Maximum Annual Total Body and Organ Dose, 2019
Shown in Descending Order of Organ Dose

BWR Facility	Total Body Dose (mrem)	Organ Dose (mrem)
Cooper	1.65E-01	2.41E-01
Grand Gulf	9.13E-02	1.35E-01
Duane Arnold	1.14E-01	1.14E-01
Susquehanna 1	4.19E-03	1.59E-02
Susquehanna 2	4.19E-03	1.59E-02
Limerick 1	4.82E-03	6.15E-03
Limerick 2	4.82E-03	6.15E-03
Perry	2.03E-03	3.13E-03
Hope Creek	7.92E-04	2.42E-03
Hatch 1	9.85E-04	1.28E-03
Browns Ferry 1	1.37E-03	1.19E-03
Browns Ferry 2	1.37E-03	1.19E-03
Browns Ferry 3	1.37E-03	1.19E-03
River Bend	4.07E-04	1.14E-03
Hatch 2	3.88E-04	1.01E-03
BWR Median Dose	1.30E-04	2.55E-04
Peach Bottom 2	1.30E-04	2.55E-04
Peach Bottom 3	1.30E-04	2.55E-04
Brunswick 1	1.43E-05	3.98E-05
Brunswick 2	1.43E-05	3.98E-05
FitzPatrick	1.11E-06	1.11E-06
Quad Cities 1	1.56E-07	1.56E-07
Quad Cities 2	1.56E-07	1.56E-07
Dresden 2	1.39E-07	1.39E-07
Dresden 3	1.39E-07	1.39E-07
Clinton		
Columbia		
Fermi 2		
LaSalle 1		
LaSalle 2		
Monticello		
Nine Mile Point 1		
Nine Mile Point 2		
ALARA Criteria	3	10

Table 3.22 PWR Liquid Effluents — Maximum Annual Total Body and Organ Dose, 2019
Shown in Descending Order of Organ Dose

PWR Facility	Total Body Dose (mrem)	Organ Dose (mrem)
North Anna 1	3.51E-01	3.65E-01
North Anna 2	3.51E-01	3.65E-01
Wolf Creek	3.05E-01	3.06E-01
Byron 1	6.68E-02	7.25E-02
Byron 2	6.68E-02	7.25E-02
McGuire 1	6.30E-02	6.70E-02
McGuire 2	6.30E-02	6.70E-02
Vogtle 1	3.99E-02	6.59E-02
Comanche Peak 1	6.35E-02	6.35E-02
Comanche Peak 2	6.35E-02	6.35E-02
Braidwood 1	5.15E-02	5.20E-02
Braidwood 2	5.15E-02	5.20E-02
Catawba 1	3.62E-02	3.67E-02
Catawba 2	3.62E-02	3.67E-02
Cook 1	4.25E-02	2.73E-02
Cook 2	4.25E-02	2.73E-02
Salem 2	3.99E-03	2.60E-02
Oconee 1	4.33E-02	2.58E-02
Oconee 2	4.33E-02	2.58E-02
Oconee 3	4.33E-02	2.58E-02
St. Lucie 1	3.96E-03	2.23E-02
St. Lucie 2	3.96E-03	2.23E-02
Vogtle 2	1.99E-02	2.02E-02
Harris	1.52E-02	1.91E-02
Farley 1	8.88E-03	1.88E-02
Farley 2	7.87E-03	1.72E-02
Salem 1	1.35E-02	1.68E-02
Beaver Valley 1	1.19E-02	1.47E-02
Beaver Valley 2	1.19E-02	1.47E-02
Summer	9.33E-03	9.43E-03
South Texas 2	8.11E-03	8.13E-03
Waterford 3	3.69E-03	7.66E-03

PWR Facility	Total Body Dose (mrem)	Organ Dose (mrem)
PWR Median Dose	4.63E-03	6.81E-03
Arkansas 1	4.53E-03	5.96E-03
Sequoyah 1	5.59E-03	5.89E-03
Sequoyah 2	5.59E-03	5.89E-03
Davis-Besse	4.73E-03	5.16E-03
South Texas 1	4.94E-03	4.97E-03
Callaway	2.95E-03	3.91E-03
Ginna	1.07E-03	1.59E-03
Point Beach 1	8.65E-04	1.45E-03
Point Beach 2	8.65E-04	1.45E-03
Arkansas 2	1.02E-03	1.11E-03
Calvert Cliffs 1	7.16E-04	9.21E-04
Calvert Cliffs 2	7.16E-04	9.21E-04
Millstone 3	8.33E-04	9.01E-04
Prairie Island 1	7.75E-04	8.46E-04
Prairie Island 2	7.75E-04	8.46E-04
Palisades	6.88E-04	7.18E-04
Indian Point 2	5.32E-04	6.34E-04
Robinson 2	1.75E-05	5.77E-04
Indian Point 3	8.93E-05	3.01E-04
Millstone 2	1.91E-04	2.67E-04
Seabrook	1.86E-04	2.33E-04
Surry 1	1.72E-04	2.04E-04
Surry 2	1.72E-04	2.04E-04
Turkey Point 3	8.08E-05	9.38E-05
Turkey Point 4	8.08E-05	9.38E-05
Diablo Canyon 1	1.55E-05	3.82E-05
Diablo Canyon 2	1.55E-05	3.82E-05
Palo Verde 1		
Palo Verde 2		
Palo Verde 3		
Watts Bar 1		
Watts Bar 2		
ALARA Criteria	3	10

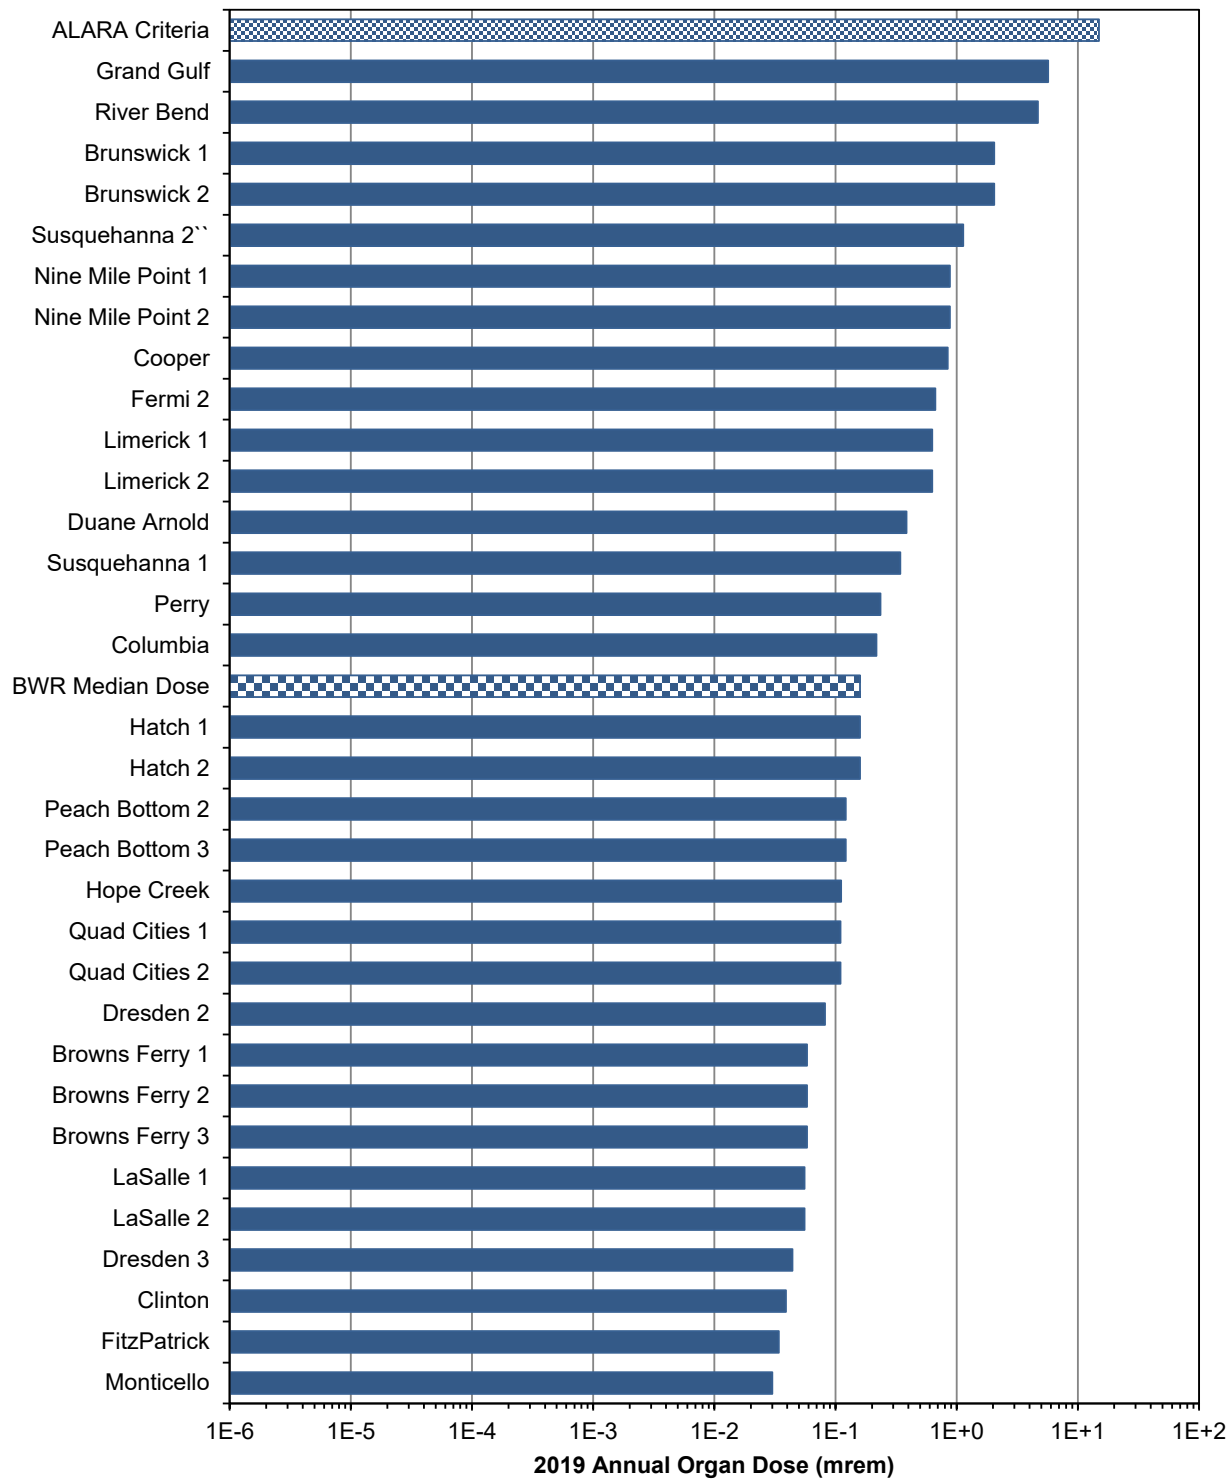


Figure 3.17 BWR Gaseous Effluents — Maximum Annual Organ Dose

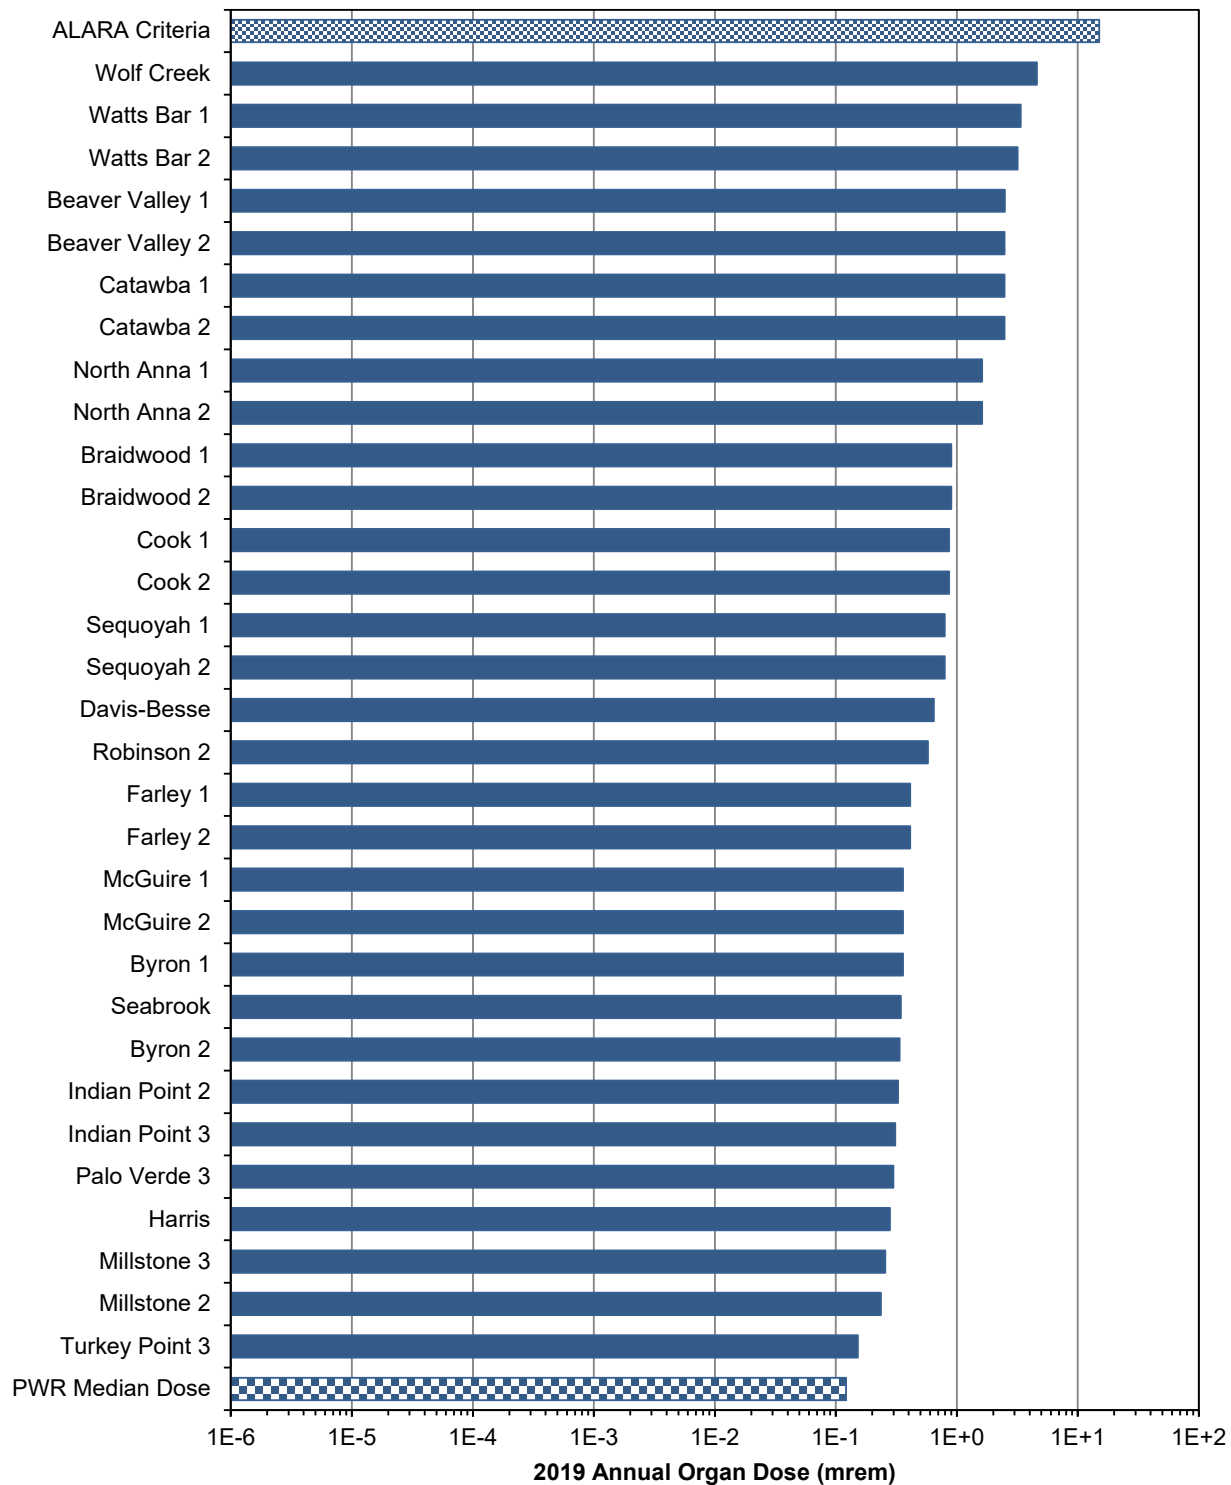


Figure 3.18 PWR Gaseous Effluents — Maximum Annual Organ Dose

(continued on the following page)

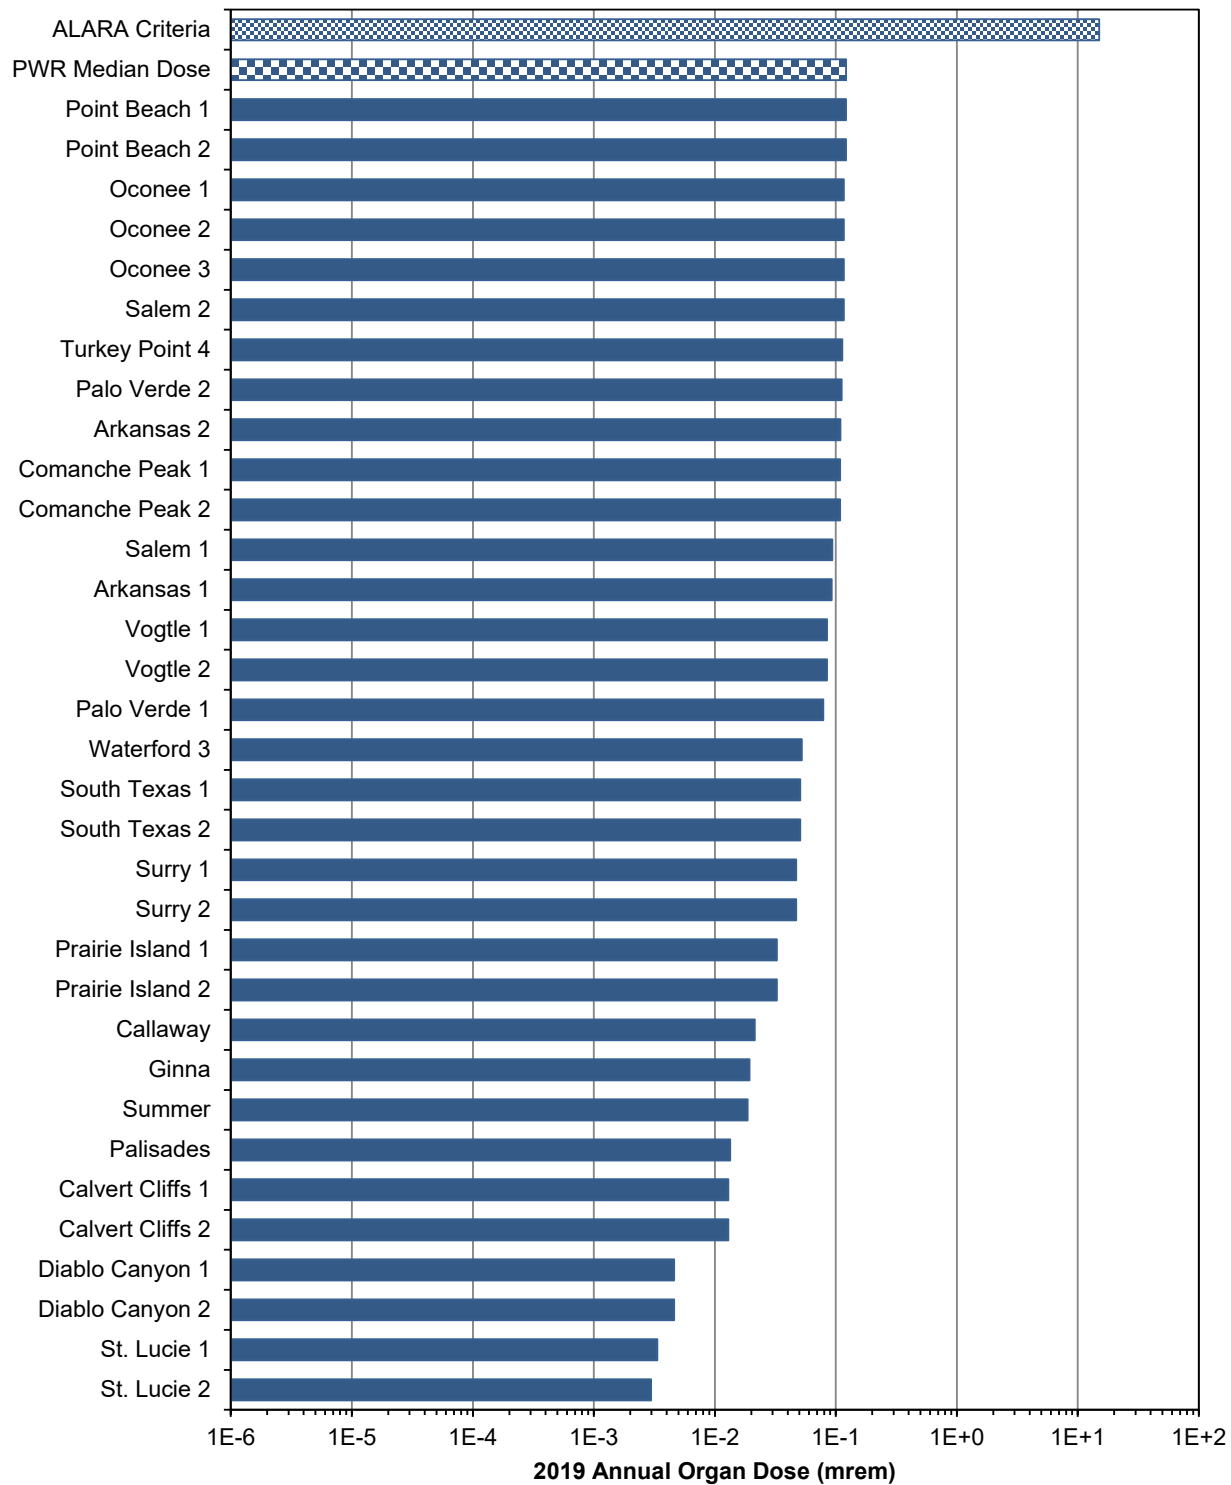


Figure 3.18 PWR Gaseous Effluents — Maximum Annual Organ Dose (continued)

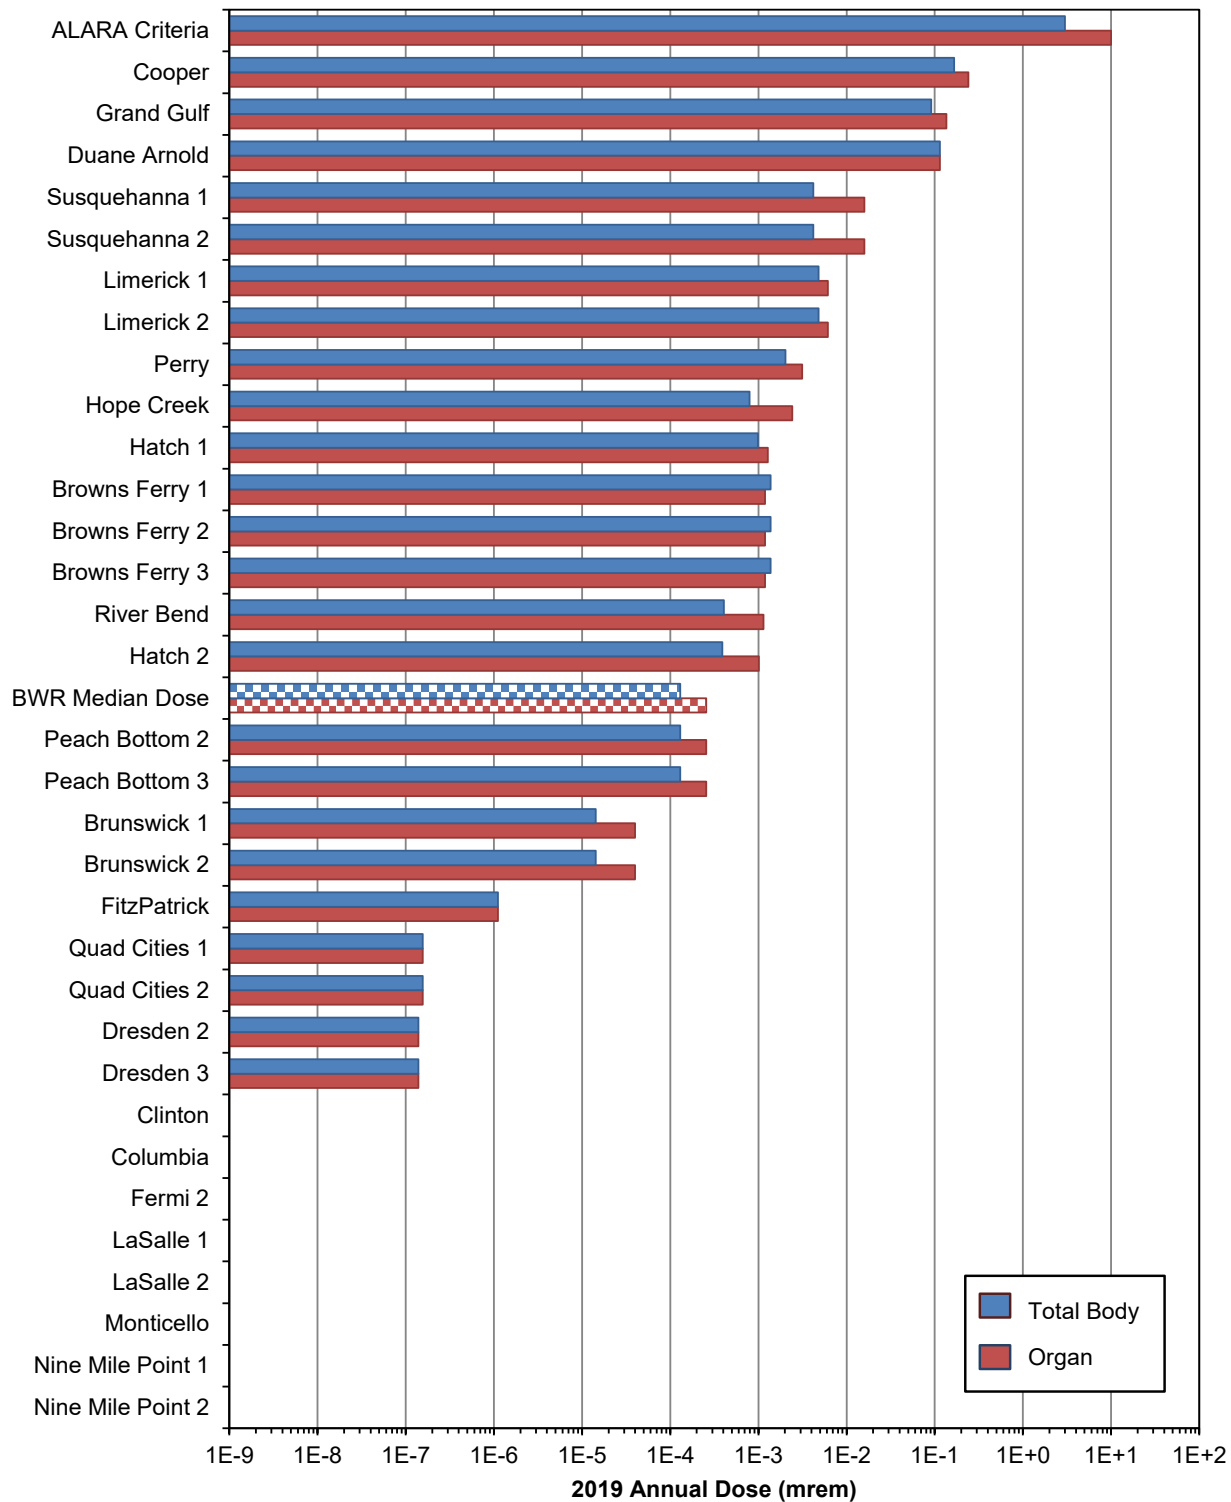


Figure 3.19 BWR Liquid Effluents — Maximum Annual Total Body and Organ Dose

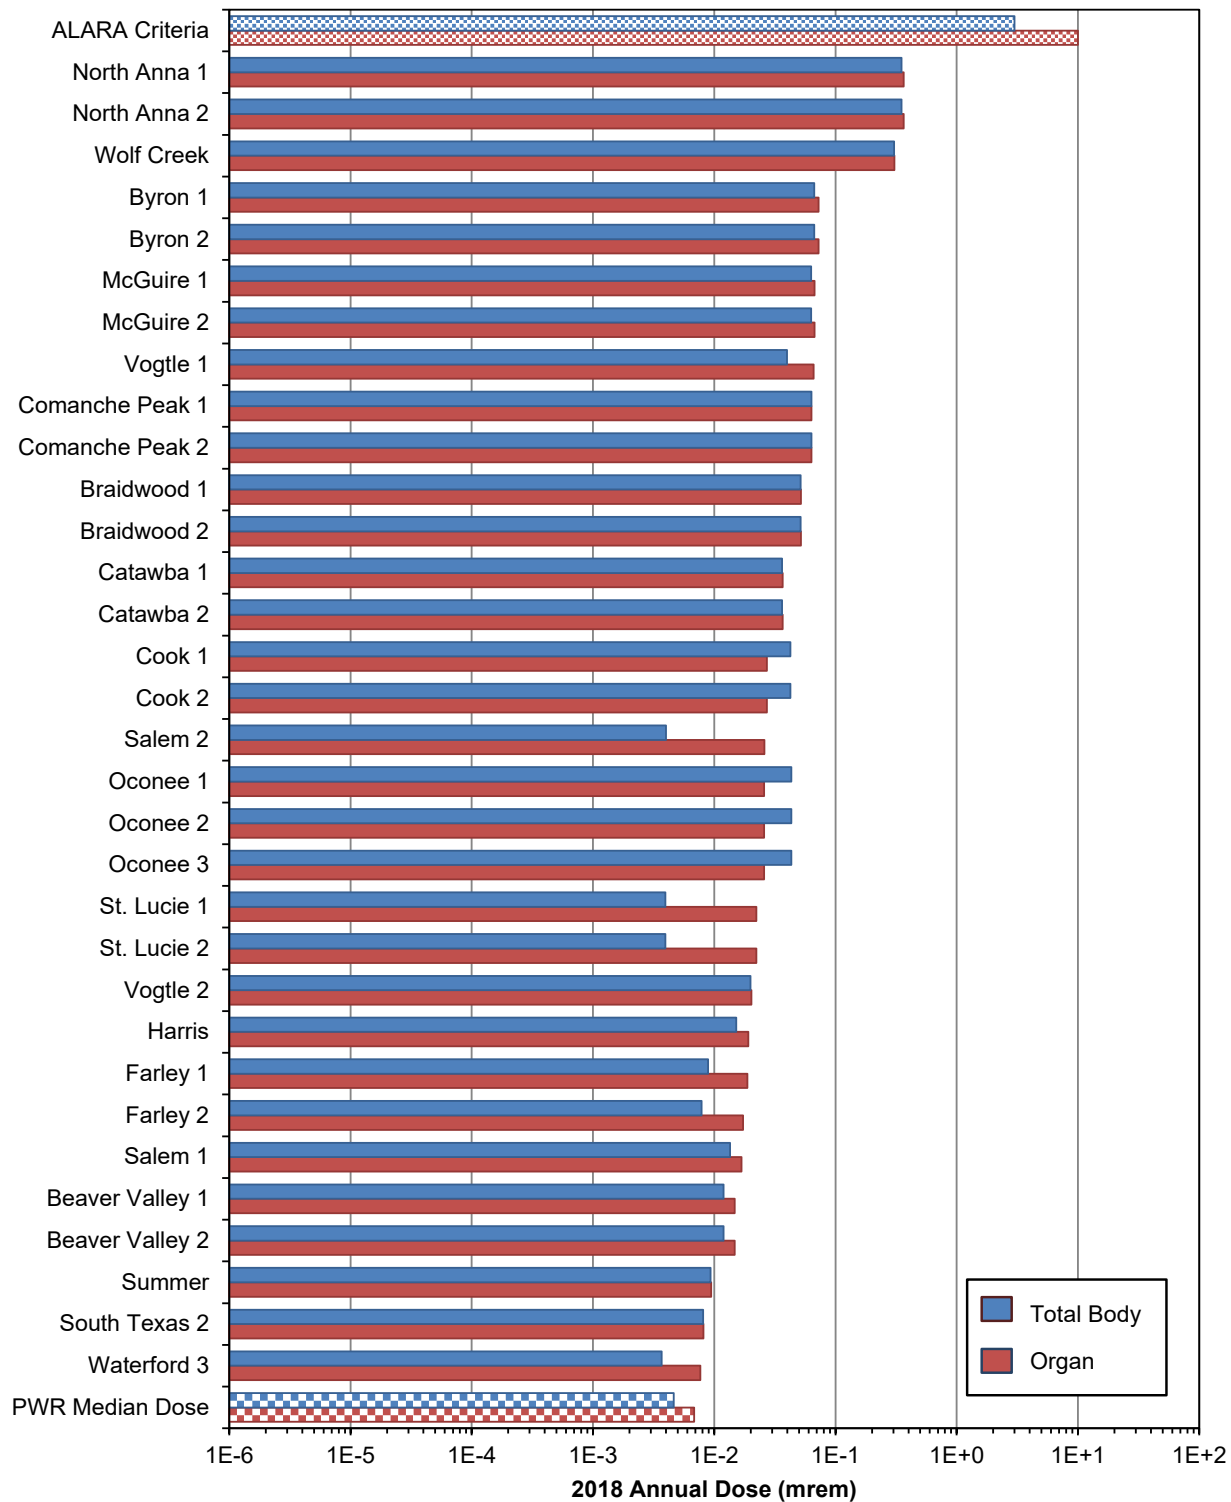


Figure 3.20 PWR Liquid Effluents — Maximum Annual Total Body and Organ Dose

(continued on the following page)

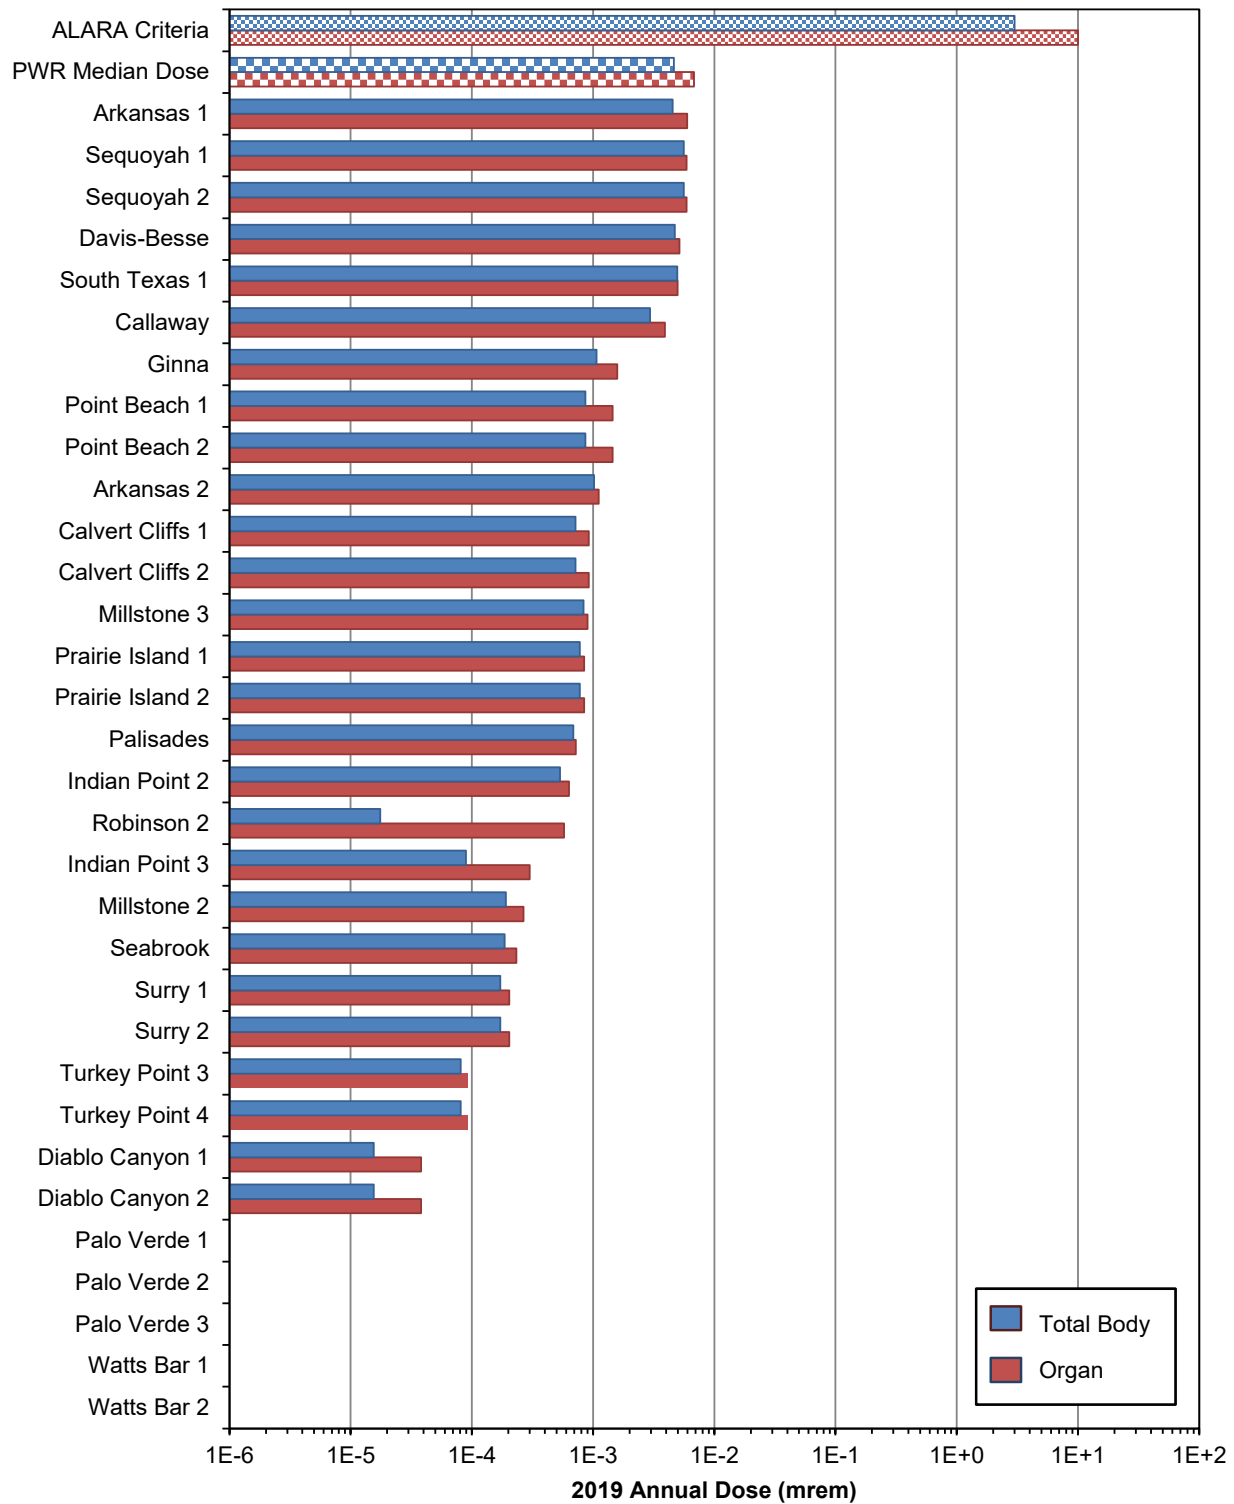
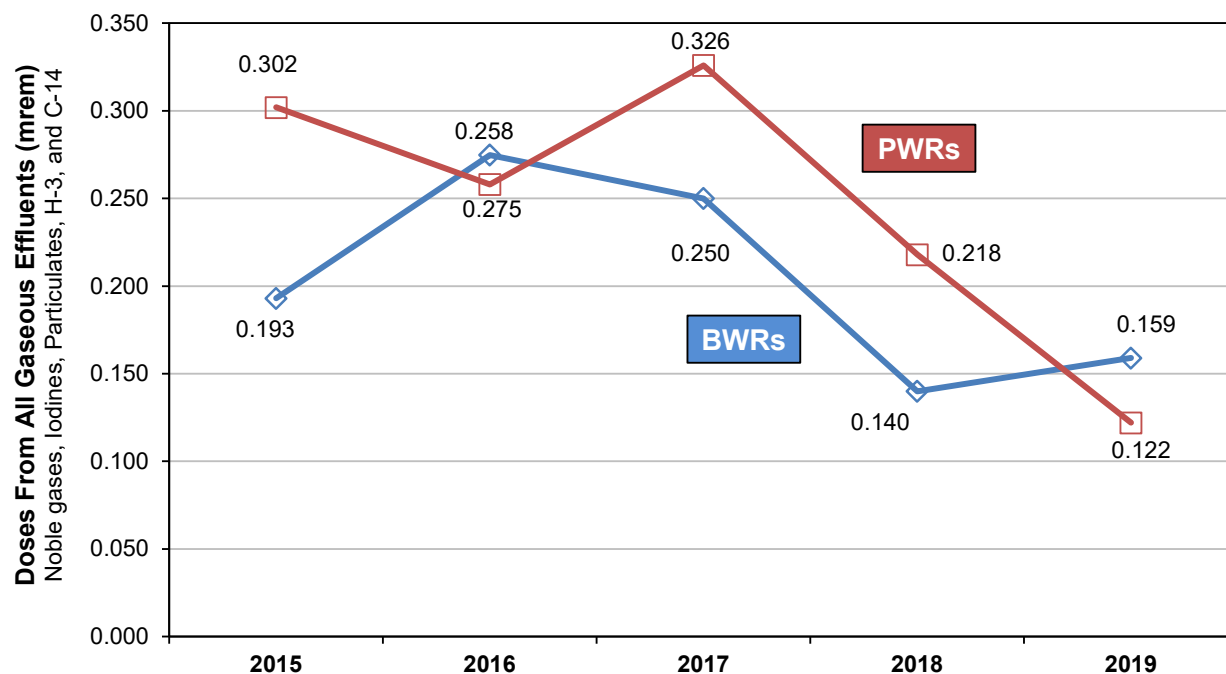
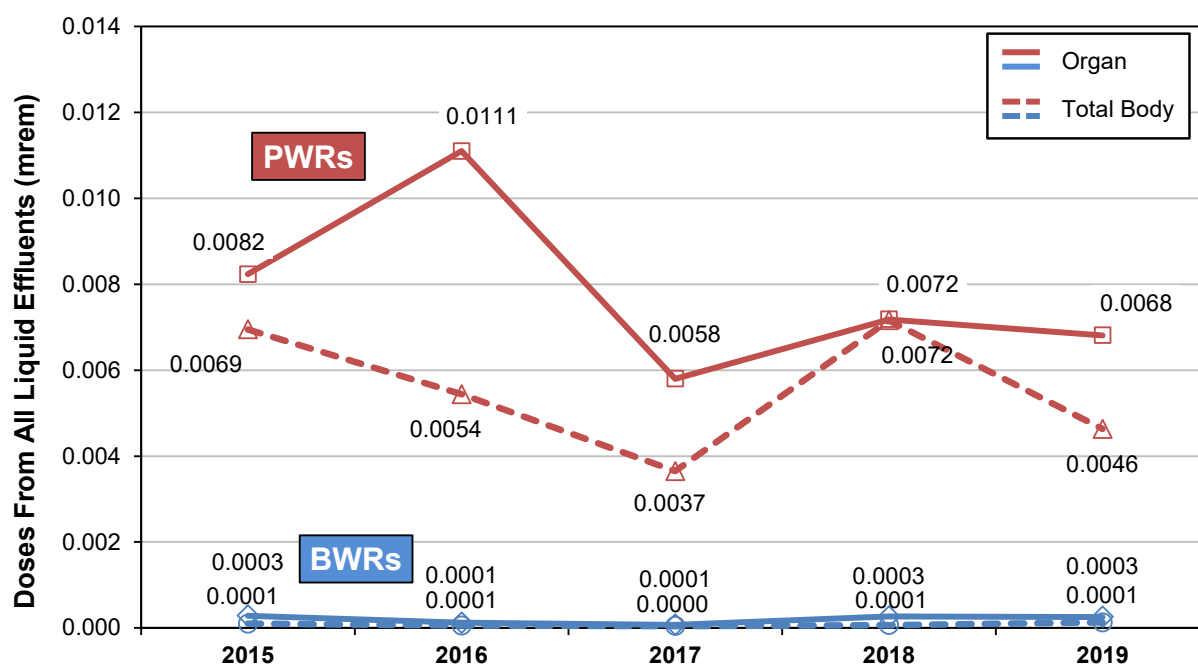


Figure 3.20 PWR Liquid Effluents — Maximum Annual Total Body and Organ Dose
(continued)



**Figure 3.21 Median Maximum Annual Organ Dose, Gaseous Effluents
5-Year Trend, 2015–2019**



**Figure 3.22 Median Maximum Annual Dose, Liquid Effluents
5-Year Trend, 2015–2019**

4 SUMMARY

The information contained in this report summarizes gaseous and liquid effluents and public doses from all 96 United States (U.S.) nuclear power plants (NPPs) licensed by the Nuclear Regulatory Commission (NRC) and in operation for the full year during calendar year 2019. Although all NPPs released some radioactive materials in 2019, none of the effluents from any NPP resulted in an exceedance of any NRC or Environmental Protection Agency (EPA) public dose limit, or any NRC as low as is reasonably achievable (ALARA) criteria.

The radionuclides selected for inclusion in this report are either the most common radionuclides or the most significant radioactive effluents, and they are particularly useful indicators of overall releases. The radionuclides selected also provide additional information about operational practices at a site. Nuclear power plants have reduced their radioactive effluents by more than 99 percent in a long-term decreasing trend in radioactive effluents (i.e., mixed fission and activation products in liquid effluents and noble gases in gaseous effluents) since the mid-1970s.

For additional context, the median dose resulting from radioactive effluents are provided for comparison to the ALARA criteria, to the natural background sources of radiation, and other sources of radiation exposure to the U.S. population. Comparisons of the radioactive effluents between NPPs may indicate differences in measurement sensitivities, fuel conditions, fuel cycle length, radioactive waste processing equipment, reactor types, reactor ages, electrical outputs, and operating conditions. Each of these factors can affect radioactive effluents.

More complete and detailed information, including copies of the NPPs' Annual Radioactive Effluent Release Reports (ARERRs), is available to the public on the NRC Web site.

5 REFERENCES

- [1] 10 CFR Part 50, "Domestic Licensing of Production and Utilization Facilities," U.S. Nuclear Regulatory Commission, Washington, DC.
- [2] Regulatory Guide 1.21, "Measuring, Evaluating, and Reporting Radioactive Material in Liquid and Gaseous Effluents and Solid Waste," Revision 2, U.S. Nuclear Regulatory Commission, Washington, DC, June 2009.
- [3] 10 CFR Part 20, "Standards for Protection Against Radiation," U.S. Nuclear Regulatory Commission, Washington, DC.
- [4] Regulatory Guide 1.109, "Calculation of Annual Doses to Man from Routine Releases of Reactor Effluents for the Purpose of Demonstrating Compliance with 10 CFR Part 50, Appendix I," U.S. Nuclear Regulatory Commission, Washington, DC, October 1977.
- [5] NCRP Report No. 160, "Ionizing Radiation Exposure of the Population of the United States," National Council on Radiation Protection and Measurements, Bethesda, MD, March 3, 2009.
- [6] NCRP Report No. 93, "Ionizing Radiation Exposure of the Population of the United States," National Council on Radiation Protection and Measurements, Bethesda, MD, September 1987.
- [7] NCRP Report No. 81, "Carbon-14 in the Environment," National Council on Radiation Protection and Measurements, Bethesda, May 1985.
- [8] Duval, J.S., Carson, J.M., Holman, P.B., and Darnley, A.G., 2005, "Terrestrial Radioactivity and Gamma-Ray Exposure in the United States and Canada: U.S. Geological Survey Open-File Report 2005-1413." Available [online](#) only.
- [9] PNNL-18240, "Radiation Doses to Hanford Workers from Natural Potassium-40," Strom, D.J., Lynch, T.P., and Weier, D.R., Pacific Northwest National Laboratory, February 2009.
- [10] NCRP Report No. 95, "Radiation Exposure of the U.S. Population from Consumer Products and Miscellaneous Sources," National Council on Radiation Protection and Measurements, Bethesda, MD, 1987.

6 GLOSSARY

Activity or radioactivity: The rate of radioactive transformations of a radionuclide, measured in the traditional unit of the curie (Ci) or the international standard unit of the becquerel (Bq).

Background (radiation): Radiation from cosmic sources; naturally occurring radioactive material, including radon (except as a decay product of source or special nuclear material); and global fallout as it exists in the environment from the testing of nuclear explosive devices and from past nuclear accidents such as Chernobyl that contribute to background radiation and are not under the control of the licensee. Background radiation does not include radiation from source, byproduct, or special nuclear materials regulated by the Nuclear Regulatory Commission.

Effluent discharge, radioactive discharge: The portion of an effluent release that reaches an unrestricted area.

Effluent release, radioactive release: The emission of an effluent from a plant structure into the site environment.

Exposure pathway: A mechanism by which radioactive material is transferred from the (local) environment to humans. There are three commonly recognized exposure pathways: inhalation, ingestion, and direct radiation.

Fission and activation gases: The noble (chemically non-reactive) gases formed from the splitting (fission) of the uranium-235 isotope in a nuclear reactor or the creation of radioactive atoms from non-radioactive atoms (activation) by the capture of neutrons or gamma rays that are released during the fission process.

Gaseous effluents: Airborne effluents.

Iodines: The measured radioactive isotopes of iodine or of other non-metal elements in group 17 of the Periodic Table of Elements. Licensees might report any combination of the iodine isotopes, I-131, I-132, I-133, I-134, and I-135.

Maximum exposed individuals: Individuals characterized as maximum with regard to food consumption, occupancy, and other usage of the region in the vicinity of the plant site. As such, they represent individuals with habits that are considered to be maximum reasonable deviations from the average for the population in general. Additionally, in physiological or metabolic respects, the maximum exposure individuals are assumed to have those characteristics that represent the averages for their corresponding age group in the general population.

Member of the public (10 CFR Part 20): Any individual except when that individual is receiving an occupational dose.

Monitoring: The measurement of radiation levels, concentrations, surface area concentrations, or quantities of radioactive material and the use of results of these measurements to evaluate potential exposures and doses.

Noble gas: One of six noble gases (helium, neon, argon, krypton, xenon, and radon) with an oxidation number of 0 that prevents it from forming compounds readily. All noble gases have the maximum number of electrons possible in their outer shell (two for helium, eight for all others), making them unreactive.

Occupational dose: as defined in 10 CFR 20.1003, means the dose received by an individual in the course of employment in which the individual's assigned duties involve exposure to radiation or to radioactive material from licensed and unlicensed sources of radiation, whether in the possession of the licensee or other person. Occupational dose does not include doses received from background radiation, from any medical administration the individual has received, from exposure to individuals administered radioactive material and released under [10 CFR] 35.75, from voluntary participation in medical research programs, or as a member of the public.

NUREG: A publication by or for the NRC containing non-sensitive information related to NRC's mission that does not contain regulatory requirements and is published in a formal agency series to ensure the "...dissemination to the public of scientific and technical information related to atomic energy..." as mandated by the Atomic Energy Act of 1954, as amended. Each publication bears an agency designator (e.g., NUREG-number-year).

Particulates: Radioactive materials that are entrained in the gaseous effluents and are not included in any other effluent category.

Site boundary: That line beyond which the land or property is not owned, leased, or otherwise controlled by the licensee.

Tritium: The radioactive isotope of hydrogen (H-3).

BIBLIOGRAPHIC DATA SHEET

(See instructions on the reverse)

1. REPORT NUMBER
(Assigned by NRC, Add Vol., Supp., Rev.,
and Addendum Numbers, if any.)

NUREG/CR-2907, Vol. 25

2. TITLE AND SUBTITLE

Radioactive Effluents from Nuclear Power Plants

Annual Report 2019

3. DATE REPORT PUBLISHED

MONTH

September

YEAR

2021

4. FIN OR GRANT NUMBER

5. AUTHOR(S)

Jason Davis, PhD., CHP Health Physicist - ORAU

6. TYPE OF REPORT

Technical

7. PERIOD COVERED (Inclusive Dates)

January 2019 – December 2019

8. PERFORMING ORGANIZATION - NAME AND ADDRESS (If NRC, provide Division, Office or Region, U. S. Nuclear Regulatory Commission, and mailing address; if contractor, provide name and mailing address.)

Oak Ridge Associated Universities
1299 Bethel Valley Road, SC-200, MS-21
Oak Ridge, TN 37830

9. SPONSORING ORGANIZATION - NAME AND ADDRESS (If NRC, type "Same as above", if contractor, provide NRC Division, Office or Region, U. S. Nuclear Regulatory Commission, and mailing address.)

Division of Risk Assessment
Office of Nuclear Reactor Regulation
U.S. Nuclear Regulatory Commission
11555 Rockville Pike, Rockville, MD 20852-2738

10. SUPPLEMENTARY NOTES

11. ABSTRACT (200 words or less)

In 2019, there were 96 commercial nuclear power plants (NPPs) licensed to operate on 57 sites in the United States (U.S.) regulated by the Nuclear Regulatory Commission (NRC). Each year, each power reactor sends a report to the NRC that identifies the radioactive liquid and gaseous effluents discharged from the facility. This report summarizes that information and presents it in a format intended for both nuclear professionals and the general public.

The reader can use this report to quickly characterize the radioactive discharges from any U.S. NPP in 2019. The radioactive effluents can then be compared across reactors. The results can also be compared with typical (or median) effluents for the industry, including short-term trends and long-term trends.

Although all operating NPPs released some radioactive materials in 2019, all effluents discharged were within the NRC's and the Environmental Protection Agency's (EPA's) public dose limits, and NRC "as low as is reasonably achievable" (ALARA) criteria. Additionally, the doses from radioactive effluents were much less than the doses from other sources of natural radiation that are commonly considered safe. This indicates radioactive effluents from NPPs in 2019 had no significant impact on the health and safety of the public or the environment.

12. KEY WORDS/DESCRIPTORS (List words or phrases that will assist researchers in locating the report.)

Effluents
Radioactive materials
ALARA
Dose

13. AVAILABILITY STATEMENT

unlimited

14. SECURITY CLASSIFICATION

(This Page)

unclassified

(This Report)

unclassified

15. NUMBER OF PAGES

16. PRICE



Federal Recycling Program



UNITED STATES
NUCLEAR REGULATORY COMMISSION
WASHINGTON, DC 20555-0001

OFFICIAL BUSINESS



@NRCgov



NUREG/CR-2907
Volume 25

Radioactive Effluents from Nuclear Power Plants

September 2021