



W. R. McCollum, Jr.
Vice President

Duke Power

Oconee Nuclear Site
7800 Rochester Highway
Seneca, SC 29672
(864) 885-3107 OFFICE
(864) 885-3564 FAX

August 3, 2000

U. S. Nuclear Regulatory Commission
Document Control Desk
Washington, DC 20555


Subject: Oconee Nuclear Station
Unit 3 EOC-18 Refueling Outage, May 2000
Steam Generator Inservice Inspection
Steam Generator Three Month Report

As required by Technical Specification 5.6.8.b, the results of the Steam Generator Tube Inservice Inspection performed during the Unit 3 End of Cycle 18 refueling outage are submitted as Enclosure A for your review.

Also included as Enclosure B is a supplemental Inspection Assessment that we believe will be helpful in reviewing the overall results of our steam generator inspections.

If there are any questions you may contact R. C. Douglas at (864) 885-3073.

Very truly yours,

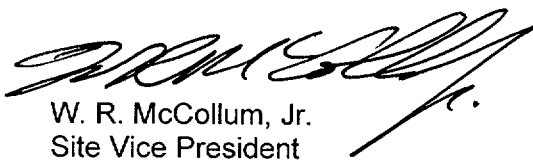

W. R. McCollum, Jr.
Site Vice President

Attachments

A001

xc w/attachments: Mr. Luis A. Reyes
 Regional Administrator, Region II

xc w/o attachments: Mr. M. C. Shannon
 NRC Senior Resident Inspector

 Mr. D. E. LaBarge
 ONRR, Senior Project Manager

 Mr. Virgil R. Autry
 DHEC

Enclosure A

**Unit 3 End of Cycle 18
Steam Generator Inservice Inspection
Steam Generator Three Month Report**

1. The following number of tubes were inspected from the inlet or outlet of the steam generators:

| <u>Steam Generator</u> | <u>Quantity</u> | <u>Inspection Method</u> |
|------------------------|-----------------|--------------------------|
| A | 14,667 | Bobbin |
| A | 14,667 | MRPC |
| B | 14,937 | Bobbin |
| B | 14,937 | MRPC |

2. The following information is submitted concerning tube indications of imperfections. (The attachments to this enclosure listed below identify the tubes with imperfections, their locations, and their size.)

| <u>Steam Generator</u> | <u>Attachment</u> | <u>Inspection Method</u> |
|------------------------|-------------------|--------------------------|
| A | A-1 | Bobbin |
| B | A-2 | Bobbin |
| A | A-3 | MRPC/Plus Point |
| B | A-4 | MRPC/Plus Point |

3. The following quantities of tubes were removed from service by plugging. (The tubes are identified in the attachments.)

| <u>Number of Tubes</u> | | |
|------------------------|-----------------------------|-------------------|
| <u>Steam Generator</u> | <u>Removed from Service</u> | <u>Attachment</u> |
| A | 146 | A-5 |
| B | 92 | A-6 |

No tubes were repaired by sleeving or rerolling during this outage

Enclosure A

Attachments:

| | | |
|-----|-----------------------------|------------|
| A-1 | S/G A - Bobbin | (36 pages) |
| A-2 | S/G B - Bobbin | (24 pages) |
| A-3 | S/G A – MRPC and Plus Point | (18 pages) |
| A-4 | S/G B – MRPC and Plus Point | (13 pages) |
| A-5 | S/G A – Plugged Tubes | (3 pages) |
| A-6 | S/G B – Plugged Tubes | (2 pages) |

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-------|-------|-----|-----|------------------|---------|---------|-----|-------|-------|----------|
| Bobbin | 1 | 1 | NQI | 0.52 | 3 | 95 | 013 | +4.23 | UTE | LTE | LTE | 19 | 510 | |
| Bobbin | 1 | 2 | NQI | 0.29 | 3 | 71 | 010 | +26.97 | UTE | LTE | LTE | 19 | 510 | |
| Bobbin | | | NQI | 1.01 | 3 | 82 | 014 | +33.53 | UTE | LTE | LTE | 19 | 510 | |
| Bobbin | | | NQI | 1.43 | 3 | 127 | 014 | +32.95 | UTE | LTE | LTE | 19 | 510 | |
| Bobbin | 1 | 5 | ADI | 1.51 | 6 | 103 | 014 | +31.90 | UTE | LTE | LTE | 65 | 510 | |
| Bobbin | | | NQI | 0.29 | 3 | 81 | UTS | -1.50 | UTE | LTE | LTE | 65 | 510 | |
| Bobbin | | | NQI | 0.44 | 3 | 110 | 015 | +1.41 | UTE | LTE | LTE | 65 | 510 | |
| Bobbin | 1 | 7 | NQI | 0.43 | 3 | 102 | 015 | +10.35 | UTE | LTE | LTE | 19 | 510 | |
| Bobbin | 1 | 9 | NQI | 0.44 | 3 | 96 | 010 | +4.80 | UTE | LTE | LTE | 43 | 510 | |
| Bobbin | 2 | 1 | NQI | 0.28 | 3 | 85 | 015 | +2.40 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | | | NQI | 0.44 | 3 | 89 | 011 | +18.50 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | | | NQI | 0.48 | 3 | 111 | 011 | +25.33 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | | | NQI | 0.52 | 3 | 109 | 012 | +8.22 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | | | NQI | 0.95 | 3 | 128 | 014 | +28.99 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | 2 | 2 | NQI | 0.54 | 3 | 106 | 013 | +5.54 | UTE | LTE | LTE | 19 | 510 | |
| Bobbin | 2 | 6 | NQI | 0.68 | 3 | 106 | 015 | +2.28 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | 2 | 9 | NQI | 0.32 | P 1 | 59 | 015 | -0.40 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | 2 | 11 | NQI | 0.65 | 3 | 66 | 015 | +31.98 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | 2 | 14 | NQI | 0.30 | P 1 | 112 | 011 | +0.56 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | | | NQI | 0.31 | P 1 | 94 | 013 | +0.75 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | 2 | 15 | NQI | 0.65 | P 1 | 107 | 010 | +0.59 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 2 | 19 | NQI | 1.09 | P 1 | 102 | 010 | +0.51 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 2 | 21 | NQI | 0.33 | 3 | 104 | 010 | +16.19 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | | | NQI | 0.35 | P 1 | 80 | 010 | -0.29 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 2 | 23 | NQI | 0.88 | 3 | 112 | 011 | +3.35 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 3 | 3 | NQI | 0.35 | 3 | 107 | 013 | +4.58 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | 3 | 4 | ADI | 1.04 | 6 | 71 | 014 | +30.40 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | | | NQI | 0.41 | 3 | 84 | 014 | +1.47 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | | | ODI | 0.33 | 3 | 111 | 011 | +11.29 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | 3 | 5 | NQI | 0.29 | 3 | 110 | 011 | +5.72 to +22.41 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | 3 | 6 | ADI | 0.68 | 6 | 64 | 014 | +31.65 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | | | NQI | 0.29 | 3 | 81 | 003 | +15.80 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | | | NQI | 0.29 | 3 | 100 | 015 | +2.98 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | | | NQI | 0.38 | 3 | 122 | 015 | +1.93 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | | | NQI | 2.72 | 3 | 136 | 015 | -1.08 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | | | ADI | 0.69 | 6 | 89 | 011 | +5.53 to +17.75 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | | | ADI | 0.74 | 6 | 86 | 010 | +19.83 to +26.65 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | 3 | 7 | ADI | 10.59 | 6 | 78 | 015 | +26.60 to +35.97 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | 3 | 9 | NQI | 1.12 | 3 | 117 | 015 | +2.46 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | 3 | 10 | NQI | 3.02 | P 1 | 95 | 015 | -1.21 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | 3 | 13 | NQI | 0.28 | 3 | 98 | 011 | +3.09 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | | | NQI | 0.47 | P 1 | 108 | 013 | -0.49 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | 3 | 14 | NQI | 1.82 | P 1 | 117 | 015 | +0.72 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | 3 | 24 | NQI | 0.50 | P 1 | 73 | 010 | +0.47 | UTE | LTE | LTE | 43 | 510 | |
| Bobbin | 3 | 27 | NQI | 0.76 | 3 | 61 | 003 | +3.45 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 3 | 32 | NQI | 0.39 | 3 | 86 | 010 | +32.58 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | | | NQI | 0.46 | 3 | 84 | 010 | +30.49 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | | | NQI | 0.54 | 3 | 105 | 010 | +31.41 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 4 | 4 | ADI | 1.91 | 6 | 100 | 011 | +13.10 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | 4 | 10 | NQI | 0.29 | 3 | 100 | 010 | +21.95 | UTE | LTE | LTE | 18 | 510 | |
| Bobbin | 4 | 16 | NQI | 0.52 | 3 | 114 | LTS | +9.49 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 4 | 27 | NQI | 0.23 | P 1 | 71 | 004 | -0.29 | UTE | LTE | LTE | 43 | 510 | |
| Bobbin | 4 | 28 | NQI | 0.41 | 3 | 86 | 009 | +16.85 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 4 | 31 | NQI | 0.44 | P 1 | 80 | 009 | +0.27 | UTE | LTE | LTE | 43 | 510 | |
| Bobbin | 4 | 39 | NQI | 0.32 | 3 | 94 | 003 | -1.61 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 5 | 4 | NQI | 0.65 | 3 | 123 | 015 | +1.68 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 5 | 8 | NQI | 0.55 | 3 | 104 | 014 | +33.10 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | | | ODI | 0.57 | 3 | 101 | 015 | +13.39 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 5 | 9 | NQI | 0.47 | P 1 | 82 | 008 | -0.70 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | | | NQI | 0.69 | P 1 | 67 | 015 | -0.47 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 5 | 10 | NQI | 0.55 | P 1 | 82 | 008 | -0.72 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 5 | 11 | NQI | 0.61 | 3 | 84 | 005 | +34.75 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 5 | 13 | NQI | 1.40 | 3 | 122 | LTS | +21.15 to +29.15 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 5 | 41 | NQI | 0.31 | 3 | 66 | 014 | +26.85 | UTE | LTE | LTE | 43 | 510 | |
| Bobbin | | | NQI | 0.40 | 3 | 85 | 014 | +28.79 | UTE | LTE | LTE | 43 | 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
Oconee Nuclear Station - Unit Three
S/G A
04/00 RFO
Bobbin, Sleeve Bobbin

Page 2 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-----------|-----|-----|----------|------------------|---------|---------|-----|-------|-------|----------|
| Bobbin | 5 | 42 | NQI | | 0.38 3 | | 98 | 003 | +35.68 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 5 | 43 | NQI | | 0.35 P 1 | | 78 | 010 | -0.32 | UTE | LTE | LTE | 43 | 510 | |
| Bobbin | 5 | 44 | NQI | | 0.55 P 1 | | 110 | 011 | -0.82 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 6 | 5 | NQI | | 0.45 3 | | 122 | 015 | +1.32 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 6 | 8 | ODI | 36 | 0.56 P 1 | | 87 | 009 | +1.47 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 6 | 9 | NQI | | 0.51 P 1 | | 84 | 008 | -0.65 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 6 | 10 | NQI | | 0.44 3 | | 90 | 010 | +3.43 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 6 | 11 | NQI | | 0.57 P 1 | | 112 | 008 | -0.68 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 6 | 13 | NQI | | 0.44 3 | | 106 | 009 | +20.54 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | | | NQI | | 0.56 3 | | 86 | 009 | +23.22 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 6 | 14 | NQI | | 0.30 3 | | 85 | 014 | +28.27 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | | | NQI | | 0.36 3 | | 111 | 014 | +33.64 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 6 | 15 | NQI | | 0.70 3 | | 101 | 014 | +28.88 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 6 | 20 | NQI | | 0.82 P 1 | | 119 | 009 | -0.59 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 6 | 22 | NQI | | 0.56 P 1 | | 128 | 009 | -0.63 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | | | NQI | | 0.77 P 1 | | 90 | 009 | +0.36 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 6 | 35 | NQI | | 0.58 P 1 | | 96 | 009 | +0.36 | UTE | LTE | LTE | 43 | 510 | |
| Bobbin | 6 | 39 | NQI | | 0.36 3 | | 97 | 014 | +28.93 | UTE | LTE | LTE | 43 | 510 | |
| Bobbin | 6 | 41 | NQI | | 0.31 3 | | 84 | 014 | +29.55 | UTE | LTE | LTE | 43 | 510 | |
| Bobbin | 6 | 49 | NQI | | 3.92 P 1 | | 29 | 015 | +0.79 | UTE | LTE | LTE | 43 | 510 | |
| Bobbin | 7 | 5 | NQI | | 0.40 3 | | 151 | 010 | +7.44 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | | | NQI | | 0.59 3 | | 118 | 010 | +6.47 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 7 | 7 | NQI | | 0.61 P 1 | | 91 | 008 | -0.61 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 7 | 10 | NQI | | 0.45 P 1 | | 77 | 007 | -0.70 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | | | NQI | | 0.95 P 1 | | 106 | 008 | -0.61 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 7 | 12 | NQI | | 0.57 P 1 | | 64 | 008 | -0.72 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | | | NQI | | 0.40 3 | | 69 | 009 | +22.54 to +29.41 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 7 | 13 | NQI | | 0.37 3 | | 119 | 013 | +22.77 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 7 | 14 | NQI | | 0.19 3 | | 100 | 009 | +29.12 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | | | NQI | | 0.63 3 | | 61 | 009 | +20.92 to +25.04 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 7 | 15 | NQI | | 0.66 3 | | 133 | LTS | +22.27 to +29.47 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 7 | 16 | NQI | | 0.23 3 | | 86 | 015 | +10.76 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | | | NQI | | 0.42 3 | | 107 | 014 | +30.27 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 7 | 17 | NQI | | 0.28 3 | | 94 | 014 | +29.92 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 7 | 19 | NQI | | 0.86 P 1 | | 93 | 009 | -0.63 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 7 | 20 | NQI | | 0.61 P 1 | | 108 | 009 | -0.70 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 7 | 23 | NQI | | 0.50 P 1 | | 106 | 009 | -0.63 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 7 | 45 | NQI | | 0.64 P 1 | | 105 | 009 | -0.70 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 7 | 48 | ODI | 11 | 0.35 P 1 | | 100 | 005 | +1.03 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 7 | 50 | NQI | | 0.23 P 1 | | 63 | 005 | +0.29 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 7 | 52 | NQI | | 0.47 P 1 | | 116 | 010 | +0.53 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 8 | 6 | NQI | | 0.47 P 1 | | 98 | 010 | -0.09 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 8 | 7 | NQI | | 0.37 3 | | 91 | 007 | +21.50 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 8 | 9 | NQI | | 0.95 P 1 | | 132 | 008 | -0.70 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 8 | 11 | NQI | | 0.31 P 1 | | 62 | 015 | +0.43 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | | | NQI | | 0.37 P 1 | | 54 | 014 | -0.27 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | | | NQI | | 0.70 P 1 | | 85 | 008 | -0.70 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 8 | 12 | NQI | | 0.45 3 | | 112 | 009 | +25.37 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 8 | 13 | NQI | | 0.49 3 | | 83 | 009 | +24.73 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 8 | 14 | NQI | | 0.67 3 | | 120 | 009 | +25.38 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | | | NQI | | 0.58 P 1 | | 88 | 009 | +0.50 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 8 | 18 | NQI | | 0.24 3 | | 89 | 009 | +19.22 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 8 | 20 | NQI | | 0.56 P 1 | | 108 | 009 | -0.79 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 8 | 27 | NQI | | 0.23 3 | | 114 | 014 | +1.19 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 8 | 36 | NQI | | 0.28 3 | | 109 | 007 | +35.21 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 8 | 37 | NQI | | 0.29 3 | | 87 | LTS | +16.10 | UTE | LTE | LTE | 43 | 510 | |
| Bobbin | 8 | 42 | NQI | | 0.73 P 1 | | 139 | 009 | -0.62 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 8 | 49 | NQI | | 0.66 P 1 | | 104 | 009 | -0.88 | UTE | LTE | LTE | 43 | 510 | |
| Bobbin | 9 | 3 | NQI | | 11.18 P 1 | | 22 | UTS | -0.00 | UTE | LTE | LTE | 29 | 510 | |
| Bobbin | 9 | 9 | NQI | | 0.68 3 | | 93 | 009 | +24.94 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 9 | 10 | NQI | | 0.65 3 | | 85 | 009 | +24.13 to +31.47 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 9 | 11 | NQI | | 0.60 3 | | 108 | 009 | +22.00 to +31.88 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 9 | 13 | NQI | | 0.86 3 | | 93 | 009 | +18.49 to +30.02 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 9 | 14 | NQI | | 0.37 3 | | 86 | 009 | +22.25 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | | | NQI | | 0.37 3 | | 96 | 009 | +23.27 | UTE | LTE | LTE | 31 | 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 3 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|-----|-----|----------|---------|-----------|-----|-------|-------|----------|
| Bobbin | 9 | 15 | NQI | | 0.35 | 3 | 108 | 009 | +32.68 | | UTE | LTE | LTE | 31 510 |
| Bobbin | | | NQI | | 0.81 | 3 | 111 | 009 | +22.03 | | UTE | LTE | LTE | 31 510 |
| Bobbin | 9 | 16 | NQI | | 0.48 | 3 | 77 | 009 | +21.29 | | UTE | LTE | LTE | 31 510 |
| Bobbin | 9 | 17 | NQI | | 0.31 | 3 | 98 | 012 | +9.48 | | UTE | LTE | LTE | 31 510 |
| Bobbin | 9 | 20 | ADI | | 1.40 | 6 | 83 | LTS | +22.34 | | UTE | LTE | LTE | 31 510 |
| Bobbin | 9 | 21 | NQI | | 0.33 | 3 | 104 | 002 | +22.49 | | UTE | LTE | LTE | 31 510 |
| Bobbin | 9 | 22 | NQI | | 0.21 | 3 | 99 | 010 | +19.13 | | UTE | LTE | LTE | 31 510 |
| Bobbin | 9 | 28 | NQI | | 0.21 | P 1 | 62 | 002 | +1.08 | | UTE | LTE | LTE | 31 510 |
| Bobbin | 9 | 29 | ODI | 15 | 0.66 | P 1 | 94 | 014 | +1.19 | | UTE | LTE | LTE | 31 510 |
| Bobbin | 9 | 42 | NQI | | 0.41 | 3 | 78 | 014 | +23.23 | | UTE | LTE | LTE | 43 510 |
| Bobbin | 9 | 54 | NQI | | 0.44 | 3 | 96 | 009 | +21.34 | | UTE | LTE | LTE | 43 510 |
| Bobbin | 9 | 55 | NQI | | 0.41 | 3 | 99 | 009 | +22.10 | to +30.44 | UTE | LTE | LTE | 42 510 |
| Bobbin | 9 | 56 | NQI | | 0.32 | 3 | 63 | 004 | +28.94 | | UTE | LTE | LTE | 43 510 |
| Bobbin | | | NQI | | 0.37 | 3 | 87 | 012 | +25.91 | | UTE | LTE | LTE | 43 510 |
| Bobbin | 9 | 57 | NQI | | 0.45 | 3 | 99 | 009 | +32.36 | | UTE | LTE | LTE | 42 510 |
| Bobbin | 9 | 59 | NQI | | 0.30 | 3 | 103 | 014 | +1.49 | | UTE | LTE | LTE | 42 510 |
| Bobbin | 10 | 1 | NQI | | 0.44 | P 1 | 105 | 008 | -0.70 | | UTE | LTE | LTE | 118 510 |
| Bobbin | 10 | 2 | NQI | | 0.64 | P 1 | 107 | 008 | -0.74 | | UTE | LTE | LTE | 29 510 |
| Bobbin | | | NQI | | 0.66 | P 1 | 113 | 008 | -0.70 | | UTE | LTE | LTE | 31 510 |
| Bobbin | 10 | 4 | NQI | | 0.55 | 3 | 49 | UTS | -0.78 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 10 | 12 | ODI | 13 | 1.18 | 3 | 108 | 015 | +36.25 | | UTE | LTE | LTE | 29 510 |
| Bobbin | | | ODI | 20 | 0.42 | 3 | 105 | 004 | +17.85 | | UTE | LTE | LTE | 29 510 |
| Bobbin | | | NQI | | 0.47 | P 1 | 87 | 015 | +1.01 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 10 | 18 | NQI | | 0.43 | P 1 | 132 | 008 | -0.71 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 10 | 19 | NQI | | 0.60 | P 1 | 118 | 008 | -0.71 | | UTE | LTE | LTE | 29 510 |
| Bobbin | | | NQI | | 1.16 | P 1 | 92 | 009 | -0.49 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 10 | 20 | NQI | | 0.28 | 3 | 102 | 013 | +8.03 | | UTE | LTE | LTE | 29 510 |
| Bobbin | | | NQI | | 0.36 | P 1 | 94 | 010 | +1.13 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 10 | 44 | NQI | | 0.53 | P 1 | 93 | 009 | +0.27 | | UTE | LTE | LTE | 42 510 |
| Bobbin | 10 | 57 | NQI | | 0.60 | 3 | 100 | 009 | +18.43 | to +28.65 | UTE | LTE | LTE | 42 510 |
| Bobbin | 10 | 58 | NQI | | 0.47 | 3 | 95 | 009 | +26.19 | | UTE | LTE | LTE | 43 510 |
| Bobbin | 10 | 59 | NQI | | 0.53 | 3 | 87 | 009 | +28.60 | to +35.21 | UTE | LTE | LTE | 42 510 |
| Bobbin | 10 | 60 | NQI | | 0.68 | P 1 | 107 | 010 | +0.54 | | UTE | LTE | LTE | 43 510 |
| Bobbin | 10 | 61 | NQI | | 0.47 | 3 | 114 | 012 | +32.11 | | UTE | LTE | LTE | 42 510 |
| Bobbin | 11 | 1 | NQI | | 0.46 | P 1 | 117 | 008 | -0.72 | | UTE | LTE | LTE | 118 510 |
| Bobbin | 11 | 2 | NQI | | 0.21 | P 1 | 108 | 014 | +0.98 | | UTE | LTE | LTE | 117 510 |
| Bobbin | 11 | 15 | NQI | | 0.47 | 3 | 103 | 009 | +8.56 | to +23.49 | UTE | LTE | LTE | 29 510 |
| Bobbin | 11 | 16 | NQI | | 0.66 | P 1 | 111 | 008 | -0.70 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 11 | 22 | NQI | | 0.57 | P 1 | 114 | 007 | -0.77 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 11 | 27 | NQI | | 0.39 | 3 | 83 | 009 | +11.33 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 11 | 28 | NQI | | 0.62 | 3 | 107 | 007 | +23.55 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 11 | 56 | NQI | | 0.26 | P 1 | 85 | 015 | -0.07 | | UTE | LTE | LTE | 43 510 |
| Bobbin | 11 | 59 | NQI | | 0.55 | 3 | 93 | 009 | +13.91 | to +36.91 | UTE | LTE | LTE | 42 510 |
| Bobbin | 11 | 61 | NQI | | 0.58 | 3 | 108 | 009 | +26.37 | to +36.27 | UTE | LTE | LTE | 42 510 |
| Bobbin | 11 | 68 | NQI | | 0.47 | 3 | 87 | 015 | +21.62 | | UTE | LTE | LTE | 86 510 |
| Bobbin | 12 | 1 | NQI | | 0.36 | 3 | 79 | 015 | +30.45 | | UTE | LTE | LTE | 118 510 |
| Bobbin | | | NQI | | 0.60 | 3 | 81 | UTS | -1.02 | | UTE | LTE | LTE | 118 510 |
| Bobbin | | | NQI | | 0.33 | P 1 | 71 | 010 | +0.27 | | UTE | LTE | LTE | 118 510 |
| Bobbin | | | NQI | | 0.51 | P 1 | 101 | 015 | +0.83 | | UTE | LTE | LTE | 118 510 |
| Bobbin | 12 | 5 | NQI | | 0.27 | 3 | 107 | 002 | +15.54 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 12 | 10 | NQI | | 0.30 | 3 | 92 | 010 | +12.46 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 12 | 12 | NQI | | 0.35 | 3 | 96 | 005 | +21.67 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 12 | 14 | NQI | | 0.63 | P 1 | 86 | 015 | +0.40 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 12 | 42 | NQI | | 0.21 | P 1 | 90 | UTS | +6.27 | | UTE | LTE | LTE | 43 510 |
| Bobbin | 12 | 57 | NQI | | 0.88 | P 1 | 111 | 007 | -0.75 | | UTE | LTE | LTE | 42 510 |
| Bobbin | 12 | 58 | NQI | | 0.48 | P 1 | 92 | 009 | +0.59 | | UTE | LTE | LTE | 43 510 |
| Bobbin | 12 | 59 | NQI | | 0.23 | 3 | 83 | 013 | +1.72 | | UTE | LTE | LTE | 42 510 |
| Bobbin | 12 | 65 | NQI | | 0.36 | 3 | 96 | 015 | +3.94 | | UTE | LTE | LTE | 43 510 |
| Bobbin | | | NQI | | 0.38 | 3 | 79 | 015 | +3.76 | | UTE | LTE | LTE | 43 510 |
| Bobbin | | | NQI | | 0.49 | 3 | 97 | 009 | +29.93 | | UTE | LTE | LTE | 43 510 |
| Bobbin | | | NQI | | 0.51 | 3 | 90 | 015 | +2.19 | | UTE | LTE | LTE | 43 510 |
| Bobbin | 12 | 69 | NQI | | 0.46 | 3 | 110 | 009 | +35.41 | | UTE | LTE | LTE | 86 510 |
| Bobbin | 12 | 70 | NQI | | 0.69 | P 1 | 112 | 008 | -0.55 | | UTE | LTE | LTE | 85 510 |
| Bobbin | | | NQI | | 0.42 | 3 | 114 | 011 | +1.10 | to +7.87 | UTE | LTE | LTE | 85 510 |
| Bobbin | 13 | 13 | NQI | | 0.40 | 3 | 59 | 004 | +6.71 | | UTE | LTE | LTE | 29 510 |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin, Sleeve Bobbin

Page 4 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|----------|-----|-----|----------|------------------|---------|-----|-------|-------|----------|
| Bobbin | 13 | 14 | NQI | | 0.36 3 | | 94 | 003 | +4.10 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 13 | 31 | NQI | | 1.03 P 1 | | 72 | 011 | -0.79 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 13 | 36 | NQI | | 0.95 3 | | 104 | 004 | +12.53 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 13 | 44 | NQI | | 0.54 P 1 | | 88 | 001 | +0.76 | | UTE | LTE | LTE | 42 510 |
| Bobbin | 13 | 47 | ODI | 38 | 0.46 P 1 | | 87 | 014 | +1.15 | | UTE | LTE | LTE | 43 510 |
| Bobbin | 13 | 55 | NQI | | 0.24 3 | | 94 | 008 | +35.78 | | UTE | LTE | LTE | 42 510 |
| Bobbin | 13 | 56 | NQI | | 0.35 3 | | 66 | 006 | +14.39 | | UTE | LTE | LTE | 43 510 |
| Bobbin | 13 | 63 | NQI | | 0.31 3 | | 97 | 010 | +6.41 | | UTE | LTE | LTE | 42 510 |
| Bobbin | | | NQI | | 0.66 3 | | 125 | 009 | +17.25 to +29.84 | | UTE | LTE | LTE | 42 510 |
| Bobbin | 13 | 65 | NQI | | 0.49 3 | | 72 | 009 | +22.08 to +33.64 | | UTE | LTE | LTE | 42 510 |
| Bobbin | 13 | 67 | NQI | | 0.41 3 | | 94 | 014 | +19.93 | | UTE | LTE | LTE | 42 510 |
| Bobbin | 13 | 69 | NQI | | 0.29 3 | | 92 | 011 | +6.47 | | UTE | LTE | LTE | 43 510 |
| Bobbin | | | NQI | | 0.30 3 | | 75 | 003 | +11.07 | | UTE | LTE | LTE | 43 510 |
| Bobbin | | | NQI | | 0.34 3 | | 97 | 009 | +35.96 | | UTE | LTE | LTE | 43 510 |
| Bobbin | | | NQI | | 0.37 3 | | 96 | 011 | +29.82 | | UTE | LTE | LTE | 43 510 |
| Bobbin | | | NQI | | 0.39 3 | | 91 | 011 | +9.69 | | UTE | LTE | LTE | 43 510 |
| Bobbin | 13 | 72 | NQI | | 0.34 P 1 | | 114 | 010 | -0.02 | | UTE | LTE | LTE | 86 510 |
| Bobbin | 13 | 73 | NQI | | 0.77 3 | | 111 | 007 | +5.52 | | UTE | LTE | LTE | 86 510 |
| Bobbin | 14 | 9 | NQI | | 0.40 P 1 | | 85 | 015 | +0.29 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 14 | 19 | NQI | | 0.84 P 1 | | 135 | 007 | -0.83 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 14 | 53 | NQI | | 0.49 3 | | 109 | 003 | +22.91 | | UTE | LTE | LTE | 39 510 |
| Bobbin | 14 | 58 | NQI | | 0.27 3 | | 107 | 010 | +17.07 | | UTE | LTE | LTE | 38 510 |
| Bobbin | 14 | 66 | NQI | | 0.41 3 | | 117 | 014 | +15.32 | | UTE | LTE | LTE | 38 510 |
| Bobbin | | | NQI | | 0.21 P 1 | | 88 | 015 | -0.11 | | UTE | LTE | LTE | 38 510 |
| Bobbin | 14 | 70 | NQI | | 0.23 3 | | 98 | 010 | +33.68 | | UTE | LTE | LTE | 85 510 |
| Bobbin | | | NQI | | 0.58 3 | | 118 | 009 | +32.37 | | UTE | LTE | LTE | 85 510 |
| Bobbin | | | NQI | | 0.32 P 1 | | 84 | 015 | +0.16 | | UTE | LTE | LTE | 85 510 |
| Bobbin | 14 | 71 | NQI | | 0.53 3 | | 105 | 009 | +34.92 | | UTE | LTE | LTE | 109 510 |
| Bobbin | 14 | 74 | NQI | | 0.38 P 1 | | 100 | 010 | +0.37 | | UTE | LTE | LTE | 85 510 |
| Bobbin | 15 | 5 | NQI | | 0.93 P 1 | | 106 | 009 | +0.47 | | UTE | LTE | LTE | 118 510 |
| Bobbin | 15 | 14 | NQI | | 0.43 3 | | 77 | 013 | -1.31 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 15 | 23 | NQI | | 0.28 3 | | 101 | 011 | +33.44 | | UTE | LTE | LTE | 29 510 |
| Bobbin | | | NQI | | 0.29 3 | | 102 | 010 | +33.92 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 15 | 28 | ADI | | 5.24 6 | | 84 | LTS | +22.48 to +26.88 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 15 | 35 | NQI | | 0.32 3 | | 104 | 007 | +26.76 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 15 | 61 | NQI | | 0.28 3 | | 83 | 014 | +19.81 | | UTE | LTE | LTE | 39 510 |
| Bobbin | 15 | 74 | NQI | | 0.61 3 | | 64 | 013 | +9.91 | | UTE | LTE | LTE | 86 510 |
| Bobbin | 15 | 75 | NQI | | 0.24 P 1 | | 66 | 014 | +0.97 | | UTE | LTE | LTE | 85 510 |
| Bobbin | 15 | 77 | NQI | | 0.54 3 | | 76 | 012 | +26.00 | | UTE | LTE | LTE | 86 510 |
| Bobbin | | | NQI | | 0.98 3 | | 109 | LTS | +0.64 | | UTE | LTE | LTE | 86 510 |
| Bobbin | | | NQI | | 0.53 P 1 | | 95 | LTS | -0.57 | | UTE | LTE | LTE | 86 510 |
| Bobbin | 16 | 1 | NQI | | 0.35 3 | | 129 | 012 | +7.44 | | UTE | LTE | LTE | 118 510 |
| Bobbin | 16 | 3 | NQI | | 0.61 P 1 | | 113 | 009 | +0.66 | | UTE | LTE | LTE | 117 510 |
| Bobbin | 16 | 7 | NQI | | 0.63 P 1 | | 69 | LTS | +0.00 | | UTE | LTE | LTE | 117 510 |
| Bobbin | 16 | 12 | NQI | | 0.29 3 | | 82 | 012 | +26.01 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 16 | 15 | NQI | | 0.59 P 1 | | 95 | LTS | -0.42 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 16 | 35 | NQI | | 0.27 P 1 | | 90 | 010 | -0.41 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 16 | 46 | NQI | | 0.45 3 | | 63 | LTS | +25.91 | | UTE | LTE | LTE | 39 510 |
| Bobbin | 16 | 74 | NQI | | 0.66 3 | | 94 | 009 | +20.43 to +28.24 | | UTE | LTE | LTE | 85 510 |
| Bobbin | 16 | 78 | NQI | | 0.47 P 1 | | 85 | 014 | +0.76 | | UTE | LTE | LTE | 86 510 |
| Bobbin | 17 | 1 | NQI | | 0.49 3 | | 93 | 014 | +9.61 | | UTE | LTE | LTE | 118 510 |
| Bobbin | | | NQI | | 0.76 3 | | 86 | UTS | -0.60 | | UTE | LTE | LTE | 118 510 |
| Bobbin | 17 | 2 | NQI | | 0.52 P 1 | | 102 | 010 | +0.46 | | UTE | LTE | LTE | 117 510 |
| Bobbin | 17 | 5 | NQI | | 0.29 P 1 | | 72 | 008 | +0.33 | | UTE | LTE | LTE | 117 510 |
| Bobbin | 17 | 7 | NQI | | 0.31 P 1 | | 103 | 009 | -0.49 | | UTE | LTE | LTE | 118 510 |
| Bobbin | 17 | 8 | NQI | | 0.70 P 1 | | 96 | LTS | -0.02 | | UTE | LTE | LTE | 117 510 |
| Bobbin | 17 | 10 | NQI | | 0.55 P 1 | | 107 | 009 | -0.81 | | UTE | LTE | LTE | 117 510 |
| Bobbin | 17 | 12 | NQI | | 0.79 3 | | 105 | LTS | +22.04 to +30.53 | | UTE | LTE | LTE | 27 510 |
| Bobbin | 17 | 35 | ADI | | 0.28 6 | | 74 | 013 | +21.51 | | UTE | LTE | LTE | 29 510 |
| Bobbin | 17 | 74 | NQI | | 0.91 P 1 | | 116 | 011 | -0.79 | | UTE | LTE | LTE | 85 510 |
| Bobbin | | | NQI | | 1.11 3 | | 31 | 009 | +8.94 to +29.78 | | UTE | LTE | LTE | 85 510 |
| Bobbin | 17 | 75 | NQI | | 1.28 3 | | 117 | 009 | +20.72 to +23.69 | | UTE | LTE | LTE | 86 510 |
| Bobbin | 17 | 76 | NQI | | 0.47 3 | | 65 | 009 | +11.61 to +29.56 | | UTE | LTE | LTE | 85 510 |
| Bobbin | 17 | 77 | NQI | | 0.70 3 | | 101 | 009 | +22.41 to +28.59 | | UTE | LTE | LTE | 86 510 |
| Bobbin | 17 | 78 | NQI | | 0.65 3 | | 87 | 009 | +17.41 to +25.85 | | UTE | LTE | LTE | 85 510 |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 5 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|------|-------|-----|-----|------------------|---------|---------|-----|-------|-------|----------|
| Bobbin | 17 | 79 | NQI | 1.72 | P 1 | 93 | 014 | +0.78 | UTE | LTE | LTE | 86 | 510 | |
| Bobbin | 18 | 9 | NQI | 0.23 | 3 | 94 | 013 | +24.50 | UTE | LTE | LTE | 117 | 510 | |
| Bobbin | 18 | 10 | NQI | 0.32 | 3 | 102 | 014 | +7.38 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | | | NQI | 0.81 | P 1 | 130 | 009 | -0.81 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | 18 | 62 | NQI | 0.28 | P 1 | 90 | 015 | +0.18 | UTE | LTE | LTE | 39 | 510 | |
| Bobbin | 18 | 68 | NQI | 0.23 | 3 | 64 | 013 | +22.04 | UTE | LTE | LTE | 39 | 510 | |
| Bobbin | 18 | 75 | NQI | 0.30 | P 1 | 91 | 014 | +1.00 | UTE | LTE | LTE | 85 | 510 | |
| Bobbin | | | NQI | 0.34 | 3 | 121 | 009 | +18.26 to +27.51 | UTE | LTE | LTE | 85 | 510 | |
| Bobbin | 18 | 76 | NQI | 0.47 | P 1 | 109 | 014 | +0.92 | UTE | LTE | LTE | 86 | 510 | |
| Bobbin | 18 | 77 | NQI | 0.67 | P 1 | 105 | 014 | +0.77 | UTE | LTE | LTE | 85 | 510 | |
| Bobbin | | | NQI | 0.31 | 3 | 106 | 009 | +12.43 to +27.93 | UTE | LTE | LTE | 85 | 510 | |
| Bobbin | 18 | 85 | NQI | 0.35 | 3 | 85 | 003 | +33.20 | UTE | LTE | LTE | 86 | 510 | |
| Bobbin | 19 | 9 | NQI | 0.16 | P 1 | 72 | 014 | +0.00 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | 19 | 64 | NQI | 0.72 | 3 | 113 | 015 | +20.48 | UTE | LTE | LTE | 38 | 510 | |
| Bobbin | 19 | 77 | NQI | 0.38 | 3 | 122 | 014 | +1.08 | UTE | LTE | LTE | 85 | 510 | |
| Bobbin | | | NQI | 0.28 | P 1 | 103 | 015 | +0.37 | UTE | LTE | LTE | 85 | 510 | |
| Bobbin | 19 | 79 | NQI | 0.23 | 3 | 116 | 014 | +1.08 | UTE | LTE | LTE | 85 | 510 | |
| Bobbin | 20 | 10 | NQI | 0.28 | P 1 | 84 | 014 | +0.25 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | 20 | 17 | NQI | 2.56 | 3 | 121 | LTS | +22.88 to +30.43 | UTE | LTE | LTE | 25 | 510 | |
| Bobbin | 20 | 37 | NQI | 0.34 | 3 | 73 | 013 | +5.70 | UTE | LTE | LTE | 25 | 510 | |
| Bobbin | 20 | 38 | NQI | 0.30 | P 1 | 89 | 014 | +0.32 | UTE | LTE | LTE | 27 | 510 | |
| Bobbin | 20 | 58 | NQI | 0.32 | P 1 | 111 | 014 | +0.41 | UTE | LTE | LTE | 39 | 510 | |
| Bobbin | 20 | 78 | NQI | 0.85 | P 1 | 46 | 007 | +0.69 | UTE | LTE | LTE | 85 | 510 | |
| Bobbin | 20 | 85 | NQI | 0.35 | 3 | 65 | 014 | +31.85 | UTE | LTE | LTE | 86 | 510 | |
| Bobbin | | | NQI | 0.44 | 3 | 101 | 014 | +32.28 | UTE | LTE | LTE | 86 | 510 | |
| Bobbin | | | NQI | 0.46 | 3 | 90 | 015 | -2.10 | UTE | LTE | LTE | 86 | 510 | |
| Bobbin | 21 | 5 | NQI | 0.54 | P 1 | 86 | 009 | -0.50 | UTE | LTE | LTE | 113 | 510 | |
| Bobbin | 21 | 27 | NQI | 0.14 | P 1 | 99 | 015 | -0.02 | UTE | LTE | LTE | 27 | 510 | |
| Bobbin | 21 | 30 | NQI | 0.19 | 3 | 82 | 013 | +9.83 | UTE | LTE | LTE | 25 | 510 | |
| Bobbin | | | NQI | 0.20 | 3 | 93 | 001 | +24.07 | UTE | LTE | LTE | 25 | 510 | |
| Bobbin | 21 | 33 | NQI | 0.69 | P 1 | 85 | 015 | +0.72 | UTE | LTE | LTE | 27 | 510 | |
| Bobbin | 21 | 34 | NQI | 0.20 | P 1 | 110 | 014 | +0.42 | UTE | LTE | LTE | 25 | 510 | |
| Bobbin | 21 | 46 | ADI | 0.92 | 6 | 77 | 002 | +33.71 | UTE | LTE | LTE | 38 | 510 | |
| Bobbin | 21 | 62 | NQI | 0.51 | 3 | 100 | 014 | +27.80 | UTE | LTE | LTE | 38 | 510 | |
| Bobbin | 21 | 65 | NQI | 0.29 | 3 | 119 | 010 | +16.16 | UTE | LTE | LTE | 39 | 510 | |
| Bobbin | | | NQI | 0.44 | 3 | 78 | 003 | +9.29 | UTE | LTE | LTE | 39 | 510 | |
| Bobbin | 21 | 74 | NQI | 0.28 | 3 | 82 | 001 | +3.52 | UTE | LTE | LTE | 38 | 510 | |
| Bobbin | 22 | 1 | NQI | 0.41 | 3 | 69 | 015 | +1.39 | UTE | LTE | LTE | 113 | 510 | |
| Bobbin | | | ADI | 0.54 | 6 | 69 | 015 | +29.78 to +34.65 | UTE | LTE | LTE | 113 | 510 | |
| Bobbin | 22 | 4 | NQI | 0.45 | 3 | 112 | 009 | -1.55 | UTE | LTE | LTE | 114 | 510 | |
| Bobbin | 22 | 10 | NQI | 0.28 | P 1 | 89 | 006 | -0.58 | UTE | LTE | LTE | 114 | 510 | |
| Bobbin | 22 | 12 | NQI | 0.36 | 3 | 106 | 006 | +23.86 | UTE | LTE | LTE | 114 | 510 | |
| Bobbin | 22 | 14 | NQI | 0.14 | P 1 | 94 | 007 | +0.11 | UTE | LTE | LTE | 114 | 510 | |
| Bobbin | 22 | 23 | NQI | 0.57 | P 1 | 111 | LTS | -0.40 | UTE | LTE | LTE | 25 | 510 | |
| Bobbin | 22 | 26 | NQI | 0.33 | 3 | 97 | 014 | +9.77 | UTE | LTE | LTE | 27 | 510 | |
| Bobbin | 22 | 41 | NQI | 0.46 | 3 | 43 | 015 | +32.48 | UTE | LTE | LTE | 25 | 510 | |
| Bobbin | 22 | 58 | NQI | 0.40 | P 1 | 89 | 004 | -0.41 | UTE | LTE | LTE | 39 | 510 | |
| Bobbin | 22 | 70 | NQI | 0.30 | 3 | 87 | 002 | +17.72 | UTE | LTE | LTE | 39 | 510 | |
| Bobbin | 22 | 73 | NQI | 0.32 | 3 | 87 | 001 | +30.75 | UTE | LTE | LTE | 38 | 510 | |
| Bobbin | 22 | 74 | NQI | 0.26 | 3 | 66 | 009 | +5.35 | UTE | LTE | LTE | 39 | 510 | |
| Bobbin | | | NQI | 0.30 | 3 | 105 | 013 | +11.95 | UTE | LTE | LTE | 39 | 510 | |
| Bobbin | 22 | 75 | NQI | 0.26 | 3 | 91 | 010 | +26.65 | UTE | LTE | LTE | 38 | 510 | |
| Bobbin | 22 | 91 | NQI | 0.73 | P 1 | 104 | 010 | +0.53 | UTE | LTE | LTE | 86 | 510 | |
| Bobbin | 22 | 93 | NQI | 0.62 | 3 | 67 | 015 | +16.21 | UTE | LTE | LTE | 86 | 510 | |
| Bobbin | 23 | 1 | NQI | 0.57 | P 1 | 83 | 009 | -0.27 | UTE | LTE | LTE | 114 | 510 | |
| Bobbin | | | NQI | 0.81 | P 1 | 86 | UTS | +0.51 | UTE | LTE | LTE | 114 | 510 | |
| Bobbin | 23 | 2 | NQI | 0.48 | P 1 | 98 | 010 | +0.44 | UTE | LTE | LTE | 113 | 510 | |
| Bobbin | 23 | 3 | NQI | 0.52 | 3 | 126 | 009 | +14.33 | UTE | LTE | LTE | 114 | 510 | |
| Bobbin | 23 | 5 | NQI | 0.60 | P 1 | 132 | 009 | -0.54 | UTE | LTE | LTE | 114 | 510 | |
| Bobbin | 23 | 24 | NQI | 0.44 | 3 | 92 | 004 | +7.40 | UTE | LTE | LTE | 25 | 510 | |
| Bobbin | 23 | 43 | NQI | 0.60 | P 1 | 69 | 014 | +0.70 | UTE | LTE | LTE | 27 | 510 | |
| Bobbin | 23 | 47 | NQI | 0.24 | 3 | 69 | 010 | +2.38 | UTE | LTE | LTE | 25 | 510 | |
| Bobbin | 23 | 50 | NQI | 2.94 | 3 | 118 | LTS | +22.75 to +30.21 | UTE | LTE | LTE | 38 | 510 | |
| Bobbin | 23 | 65 | NQI | 0.36 | P 1 | 89 | 014 | +0.27 | UTE | LTE | LTE | 39 | 510 | |
| Bobbin | 24 | 2 | NQI | 0.52 | P 1 | 108 | 010 | +0.63 | UTE | LTE | LTE | 114 | 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 6 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | *TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|----------|-----|-----|----------|---------|---------|-----|-------|-------|----------|
| Bobbin | 24 | 4 | NQI | | 0.42 P 1 | 95 | 009 | +0.45 | UTE | LTE | LTE | 114 | 510 | |
| Bobbin | 24 | 14 | NQI | | 0.55 3 | 101 | 004 | +9.93 | UTE | LTE | LTE | 114 | 510 | |
| Bobbin | 24 | 25 | NQI | | 0.37 3 | 91 | 006 | +26.62 | UTE | LTE | LTE | 27 | 510 | |
| Bobbin | 24 | 44 | NQI | | 0.29 P 1 | 81 | 014 | +0.73 | UTE | LTE | LTE | 25 | 510 | |
| Bobbin | | | NQI | | 0.58 P 1 | 98 | 014 | +0.20 | UTE | LTE | LTE | 25 | 510 | |
| Bobbin | 24 | 75 | NQI | | 0.30 3 | 108 | 002 | +10.37 | UTE | LTE | LTE | 39 | 510 | |
| Bobbin | 25 | 15 | NQI | | 0.41 3 | 61 | 008 | +10.88 | UTE | LTE | LTE | 114 | 510 | |
| Bobbin | 25 | 26 | NQI | | 0.32 3 | 89 | 013 | +31.77 | UTE | LTE | LTE | 25 | 510 | |
| Bobbin | 25 | 41 | NQI | | 0.23 3 | 102 | 007 | +36.87 | UTE | LTE | LTE | 25 | 510 | |
| Bobbin | | | NQI | | 0.25 3 | 85 | 009 | +18.55 | UTE | LTE | LTE | 25 | 510 | |
| Bobbin | 25 | 43 | NQI | | 0.28 3 | 112 | 006 | +31.55 | UTE | LTE | LTE | 25 | 510 | |
| Bobbin | 25 | 46 | NQI | | 0.26 3 | 96 | 015 | +17.30 | UTE | LTE | LTE | 25 | 510 | |
| Bobbin | 25 | 65 | NQI | | 4.73 3 | 150 | 015 | +33.39 | UTE | LTE | LTE | 39 | 510 | |
| Bobbin | 25 | 83 | NQI | | 0.51 3 | 127 | 015 | +33.94 | UTE | LTE | LTE | 85 | 510 | |
| Bobbin | 25 | 91 | NQI | | 0.80 3 | 46 | 012 | +24.13 | UTE | LTE | LTE | 85 | 510 | |
| Bobbin | 25 | 94 | NQI | | 0.66 P 1 | 94 | 009 | -0.64 | UTE | LTE | LTE | 86 | 510 | |
| Bobbin | | | NQI | | 0.67 P 1 | 88 | 009 | +0.55 | UTE | LTE | LTE | 86 | 510 | |
| Bobbin | 25 | 95 | NQI | | 0.62 P 1 | 63 | 008 | +0.62 | UTE | LTE | LTE | 85 | 510 | |
| Bobbin | 26 | 3 | NQI | | 0.60 P 1 | 117 | 010 | +0.58 | UTE | LTE | LTE | 114 | 510 | |
| Bobbin | 26 | 33 | NQI | | 0.42 P 1 | 82 | 005 | +0.74 | UTE | LTE | LTE | 26 | 510 | |
| Bobbin | 26 | 37 | NQI | | 0.49 3 | 79 | 002 | +15.47 | UTE | LTE | LTE | 26 | 510 | |
| Bobbin | 26 | 54 | NQI | | 0.25 3 | 93 | 009 | +35.27 | UTE | LTE | LTE | 38 | 510 | |
| Bobbin | | | NQI | | 0.52 3 | 70 | 010 | +16.55 | UTE | LTE | LTE | 38 | 510 | |
| Bobbin | 26 | 78 | NQI | | 0.22 3 | 87 | 011 | +35.42 | UTE | LTE | LTE | 38 | 510 | |
| Bobbin | 27 | 3 | NQI | | 0.24 P 1 | 83 | UTS | +16.72 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | | | NQI | | 0.71 P 1 | 103 | 010 | +0.56 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | 27 | 6 | NQI | | 0.49 P 1 | 107 | 010 | +0.57 | UTE | LTE | LTE | 117 | 510 | |
| Bobbin | 27 | 41 | NQI | | 0.24 3 | 108 | 015 | +7.99 | UTE | LTE | LTE | 22 | 510 | |
| Bobbin | 27 | 57 | NQI | | 0.41 3 | 98 | 004 | +16.85 | UTE | LTE | LTE | 38 | 510 | |
| Bobbin | | | NQI | | 0.19 P 1 | 95 | 014 | +0.11 | UTE | LTE | LTE | 38 | 510 | |
| Bobbin | 27 | 68 | NQI | | 0.63 P 1 | 61 | 014 | +0.36 | UTE | LTE | LTE | 39 | 510 | |
| Bobbin | 27 | 78 | NQI | | 0.37 3 | 92 | 004 | +23.53 | UTE | LTE | LTE | 39 | 510 | |
| Bobbin | 27 | 92 | NQI | | 0.51 3 | 110 | 010 | +11.05 | UTE | LTE | LTE | 86 | 510 | |
| Bobbin | 27 | 93 | NQI | | 0.29 3 | 90 | 013 | +3.92 | UTE | LTE | LTE | 85 | 510 | |
| Bobbin | 27 | 98 | NQI | | 0.57 3 | 108 | 014 | +33.15 | UTE | LTE | LTE | 86 | 510 | |
| Bobbin | | | NQI | | 0.52 P 1 | 62 | 011 | -0.76 | UTE | LTE | LTE | 86 | 510 | |
| Bobbin | 28 | 1 | NQI | | 0.29 3 | 59 | 015 | +32.57 | UTE | LTE | LTE | 113 | 510 | |
| Bobbin | | | NQI | | 0.20 P 1 | 90 | 012 | -0.15 | UTE | LTE | LTE | 113 | 510 | |
| Bobbin | 28 | 7 | NQI | | 0.71 3 | 154 | 007 | +30.57 | UTE | LTE | LTE | 113 | 510 | |
| Bobbin | 28 | 25 | NQI | | 0.19 P 1 | 98 | 004 | -0.34 | UTE | LTE | LTE | 22 | 510 | |
| Bobbin | 28 | 27 | NQI | | 0.57 P 1 | 87 | LTS | -0.23 | UTE | LTE | LTE | 22 | 510 | |
| Bobbin | 28 | 37 | NQI | | 0.24 3 | 67 | 012 | +32.59 | UTE | LTE | LTE | 22 | 510 | |
| Bobbin | | | NQI | | 0.27 3 | 99 | 012 | +35.21 | UTE | LTE | LTE | 22 | 510 | |
| Bobbin | | | NQI | | 0.39 3 | 103 | 010 | +30.89 | UTE | LTE | LTE | 22 | 510 | |
| Bobbin | | | NQI | | 0.44 3 | 105 | 010 | +29.63 | UTE | LTE | LTE | 22 | 510 | |
| Bobbin | 28 | 45 | NQI | | 0.25 3 | 86 | 009 | +21.93 | UTE | LTE | LTE | 22 | 510 | |
| Bobbin | 28 | 55 | NQI | | 0.48 3 | 65 | 006 | +20.79 | UTE | LTE | LTE | 39 | 510 | |
| Bobbin | 28 | 56 | NQI | | 0.39 3 | 92 | 012 | +20.62 | UTE | LTE | LTE | 38 | 510 | |
| Bobbin | 28 | 64 | NQI | | 0.32 3 | 63 | 011 | +20.19 | UTE | LTE | LTE | 38 | 510 | |
| Bobbin | 28 | 67 | NQI | | 0.32 3 | 63 | 002 | +33.65 | UTE | LTE | LTE | 39 | 510 | |
| Bobbin | 28 | 79 | NQI | | 0.47 3 | 93 | LTS | +40.59 | UTE | LTE | LTE | 39 | 510 | |
| Bobbin | 28 | 90 | NQI | | 0.35 P 1 | 61 | 001 | +0.31 | UTE | LTE | LTE | 85 | 510 | |
| Bobbin | 28 | 91 | NQI | | 0.45 3 | 94 | 007 | +34.99 | UTE | LTE | LTE | 86 | 510 | |
| Bobbin | | | NQI | | 0.55 3 | 93 | 006 | +8.68 | UTE | LTE | LTE | 86 | 510 | |
| Bobbin | 28 | 96 | NQI | | 0.27 3 | 80 | 015 | +22.67 | UTE | LTE | LTE | 85 | 510 | |
| Bobbin | 29 | 2 | NQI | | 1.05 P 1 | 105 | 010 | -0.23 | UTE | LTE | LTE | 114 | 510 | |
| Bobbin | 29 | 12 | NQI | | 0.22 3 | 91 | LTS | +40.67 | UTE | LTE | LTE | 114 | 510 | |
| Bobbin | | | NQI | | 0.35 3 | 74 | 010 | +21.98 | UTE | LTE | LTE | 114 | 510 | |
| Bobbin | 29 | 13 | NQI | | 0.31 3 | 104 | 008 | +35.95 | UTE | LTE | LTE | 113 | 510 | |
| Bobbin | 29 | 25 | NQI | | 0.30 3 | 87 | 011 | +3.17 | UTE | LTE | LTE | 22 | 510 | |
| Bobbin | 29 | 27 | NQI | | 0.36 3 | 97 | 006 | +31.27 | UTE | LTE | LTE | 22 | 510 | |
| Bobbin | 29 | 56 | ODI | 4 | 0.48 P 1 | 98 | 014 | +1.04 | UTE | LTE | LTE | 39 | 510 | |
| Bobbin | 29 | 57 | ODI | 33 | 0.88 P 1 | 91 | 014 | +0.98 | UTE | LTE | LTE | 38 | 510 | |
| Bobbin | 29 | 59 | NQI | | 0.29 P 1 | 109 | 014 | +0.48 | UTE | LTE | LTE | 38 | 510 | |
| Bobbin | 29 | 72 | NQI | | 0.39 3 | 107 | 006 | +26.76 | UTE | LTE | LTE | 39 | 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 7 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|-----|-----|----------|------------------|---------|-----|-------|-------|----------|
| Bobbin | 30 | 1 | NQI | | 2.78 | 3 | 128 | 015 | +1.02 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 30 | 19 | NQI | | 0.24 | 3 | 96 | 010 | +10.35 | UTE | LTE | LTE | 113 | 510 |
| Bobbin | 30 | 32 | NQI | | 0.22 | 3 | 93 | 011 | +7.93 | UTE | LTE | LTE | 20 | 510 |
| Bobbin | 30 | 41 | NQI | | 0.22 | 3 | 72 | 014 | +17.24 | UTE | LTE | LTE | 22 | 510 |
| Bobbin | 30 | 76 | NQI | | 0.29 | 3 | 109 | LTS | +12.28 | UTE | LTE | LTE | 34 | 510 |
| Bobbin | 30 | 80 | ODI | 30 | 1.03 | P 1 | 90 | 014 | +0.97 | UTE | LTE | LTE | 34 | 510 |
| Bobbin | 31 | 1 | NQI | | 0.43 | P 1 | 99 | 007 | +0.41 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 31 | 2 | NQI | | 0.57 | P 1 | 79 | 012 | +0.68 | UTE | LTE | LTE | 113 | 510 |
| Bobbin | 31 | 5 | NQI | | 0.29 | 3 | 84 | 009 | +19.39 | UTE | LTE | LTE | 113 | 510 |
| Bobbin | 31 | 7 | NQI | | 0.34 | P 1 | 89 | 009 | +0.40 | UTE | LTE | LTE | 113 | 510 |
| Bobbin | 31 | 8 | NQI | | 0.33 | 3 | 86 | 011 | +26.43 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | | | NQI | | 0.36 | P 1 | 105 | 010 | +0.50 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 31 | 48 | NQI | | 0.70 | P 1 | 87 | 013 | -0.87 | UTE | LTE | LTE | 22 | 510 |
| Bobbin | 31 | 56 | NQI | | 0.25 | 3 | 95 | 015 | +39.73 | UTE | LTE | LTE | 37 | 510 |
| Bobbin | 31 | 57 | NQI | | 0.17 | 3 | 83 | 011 | +22.01 | UTE | LTE | LTE | 34 | 510 |
| Bobbin | | | NQI | | 0.49 | 3 | 76 | 011 | +24.13 | UTE | LTE | LTE | 34 | 510 |
| Bobbin | | | NQI | | 0.31 | P 1 | 87 | 014 | -0.45 | UTE | LTE | LTE | 34 | 510 |
| Bobbin | 31 | 59 | NQI | | 0.24 | 3 | 73 | 011 | +7.07 | UTE | LTE | LTE | 34 | 510 |
| Bobbin | 31 | 61 | NQI | | 0.33 | 3 | 82 | 011 | +3.13 | UTE | LTE | LTE | 34 | 510 |
| Bobbin | 31 | 71 | NQI | | 0.37 | P 1 | 96 | 015 | +0.42 | UTE | LTE | LTE | 34 | 510 |
| Bobbin | 31 | 74 | NQI | | 0.50 | 3 | 118 | 009 | +24.04 | UTE | LTE | LTE | 37 | 510 |
| Bobbin | | | NQI | | 0.76 | 3 | 92 | 006 | +17.00 | UTE | LTE | LTE | 37 | 510 |
| Bobbin | 31 | 105 | NQI | | 0.28 | 3 | 94 | 015 | +37.54 | UTE | LTE | LTE | 86 | 510 |
| Bobbin | 32 | 1 | NQI | | 0.48 | 3 | 89 | 015 | +18.27 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 32 | 3 | NQI | | 1.09 | P 1 | 107 | 010 | +0.70 | UTE | LTE | LTE | 113 | 510 |
| Bobbin | 32 | 14 | NQI | | 0.52 | 3 | 97 | 007 | +21.80 | UTE | LTE | LTE | 113 | 510 |
| Bobbin | 32 | 19 | NQI | | 0.31 | 3 | 94 | 010 | +30.74 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 32 | 41 | NQI | | 0.51 | 3 | 131 | LTS | +21.83 to +29.04 | UTE | LTE | LTE | 20 | 510 |
| Bobbin | 32 | 50 | NQI | | 0.21 | 3 | 62 | 011 | +11.70 | UTE | LTE | LTE | 22 | 510 |
| Bobbin | 32 | 57 | NQI | | 0.26 | 3 | 101 | 011 | +14.93 to +17.36 | UTE | LTE | LTE | 37 | 510 |
| Bobbin | 32 | 69 | NQI | | 0.23 | 3 | 53 | 007 | +31.58 | UTE | LTE | LTE | 34 | 510 |
| Bobbin | | | NQI | | 0.32 | 3 | 107 | 014 | +5.81 | UTE | LTE | LTE | 34 | 510 |
| Bobbin | | | NQI | | 0.36 | 3 | 64 | 007 | +24.98 | UTE | LTE | LTE | 34 | 510 |
| Bobbin | 32 | 72 | NQI | | 0.23 | 3 | 94 | 006 | +21.19 | UTE | LTE | LTE | 37 | 510 |
| Bobbin | 32 | 88 | NQI | | 1.29 | 3 | 98 | LTS | +21.33 to +29.85 | UTE | LTE | LTE | 85 | 510 |
| Bobbin | 32 | 96 | NQI | | 0.37 | P 1 | 100 | UTS | +15.79 | UTE | LTE | LTE | 85 | 510 |
| Bobbin | 33 | 1 | NQI | | 0.33 | 3 | 93 | 015 | +16.02 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | | | NQI | | 0.41 | P 1 | 73 | 012 | +0.66 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 33 | 2 | NQI | | 0.24 | 3 | 110 | 014 | +5.93 | UTE | LTE | LTE | 113 | 510 |
| Bobbin | 33 | 3 | NQI | | 0.28 | 3 | 98 | 014 | +23.31 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | | | NQI | | 0.46 | P 1 | 117 | 010 | -0.41 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | | | NQI | | 0.62 | P 1 | 95 | 010 | +0.64 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 33 | 6 | NQI | | 0.53 | P 1 | 118 | 010 | +0.55 | UTE | LTE | LTE | 113 | 510 |
| Bobbin | 33 | 7 | NQI | | 0.26 | 3 | 87 | 013 | +14.32 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | | | NQI | | 0.30 | 3 | 107 | 013 | +7.77 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 33 | 17 | DWI | | 0.62 | 3 | 50 | 013 | +6.45 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 33 | 21 | ODI | 22 | 0.74 | P 1 | 98 | 014 | +0.96 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 33 | 53 | NQI | | 0.16 | 3 | 95 | 010 | +8.87 | UTE | LTE | LTE | 22 | 510 |
| Bobbin | | | NQI | | 0.23 | 3 | 64 | 010 | +23.81 | UTE | LTE | LTE | 22 | 510 |
| Bobbin | | | NQI | | 0.24 | 3 | 89 | 009 | +27.25 | UTE | LTE | LTE | 22 | 510 |
| Bobbin | | | NQI | | 0.31 | 3 | 94 | 005 | +12.08 | UTE | LTE | LTE | 22 | 510 |
| Bobbin | 33 | 80 | NQI | | 0.25 | 3 | 73 | 014 | +17.59 | UTE | LTE | LTE | 34 | 510 |
| Bobbin | | | NQI | | 0.41 | 3 | 94 | 014 | +26.77 | UTE | LTE | LTE | 34 | 510 |
| Bobbin | 33 | 81 | NQI | | 0.17 | 3 | 92 | 007 | +24.72 | UTE | LTE | LTE | 37 | 510 |
| Bobbin | 34 | 6 | NQI | | 0.38 | 3 | 87 | 008 | +37.49 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 34 | 13 | NQI | | 0.54 | P 1 | 112 | 008 | -0.81 | UTE | LTE | LTE | 113 | 510 |
| Bobbin | 34 | 33 | NQI | | 0.17 | 3 | 87 | 015 | +41.37 | UTE | LTE | LTE | 20 | 510 |
| Bobbin | 34 | 41 | NQI | | 0.26 | 3 | 109 | 006 | +19.72 | UTE | LTE | LTE | 20 | 510 |
| Bobbin | 34 | 45 | NQI | | 0.31 | P 1 | 100 | 014 | +0.45 | UTE | LTE | LTE | 20 | 510 |
| Bobbin | 34 | 64 | NQI | | 0.78 | 3 | 91 | 004 | +9.92 | UTE | LTE | LTE | 37 | 510 |
| Bobbin | 34 | 70 | NQI | | 0.28 | 3 | 97 | 012 | +3.99 | UTE | LTE | LTE | 37 | 510 |
| Bobbin | 34 | 73 | NQI | | 0.38 | 3 | 81 | 003 | +34.41 | UTE | LTE | LTE | 34 | 510 |
| Bobbin | 34 | 84 | NQI | | 0.48 | 3 | 101 | 004 | +14.48 | UTE | LTE | LTE | 37 | 510 |
| Bobbin | 34 | 87 | NQI | | 0.79 | P 1 | 91 | 015 | +0.00 | UTE | LTE | LTE | 82 | 510 |
| Bobbin | 34 | 88 | NQI | | 0.41 | 3 | 112 | 011 | +5.33 | UTE | LTE | LTE | 81 | 510 |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 8 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|-----|-----|----------|------------------|---------|-----|-------|-------|----------|
| Bobbin | 34 | 96 | NQI | | 0.34 | 3 | 75 | 014 | +27.32 | UTE | LTE | LTE | 82 | 510 |
| Bobbin | 34 | 101 | NQI | | 0.42 | 3 | 79 | 011 | +15.36 | UTE | LTE | LTE | 81 | 510 |
| Bobbin | 35 | 2 | ODI | 17 | 1.00 | 3 | 106 | 015 | +35.33 | UTE | LTE | LTE | 113 | 510 |
| Bobbin | 35 | 5 | NQI | | 0.38 | 3 | 88 | 006 | +34.00 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 35 | 9 | NQI | | 0.36 | P 1 | 93 | 008 | -0.68 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 35 | 10 | NQI | | 0.17 | P 1 | 71 | 014 | +0.98 | UTE | LTE | LTE | 113 | 510 |
| Bobbin | 35 | 41 | NQI | | 0.54 | P 1 | 46 | 015 | +0.64 | UTE | LTE | LTE | 18 | 510 |
| Bobbin | | | NQI | | 0.55 | P 1 | 49 | 015 | +0.65 | UTE | LTE | LTE | 20 | 510 |
| Bobbin | 35 | 42 | NQI | | 0.49 | P 1 | 84 | 014 | +0.38 | UTE | LTE | LTE | 20 | 510 |
| Bobbin | | | NQI | | 0.50 | P 1 | 84 | 014 | +0.33 | UTE | LTE | LTE | 18 | 510 |
| Bobbin | 35 | 54 | NQI | | 0.29 | 3 | 96 | 013 | +2.57 | UTE | LTE | LTE | 20 | 510 |
| Bobbin | 35 | 98 | NQI | | 0.25 | 3 | 79 | 013 | +28.28 | UTE | LTE | LTE | 81 | 510 |
| Bobbin | 35 | 101 | NQI | | 0.49 | 3 | 96 | 003 | +35.18 | UTE | LTE | LTE | 82 | 510 |
| Bobbin | 35 | 103 | NQI | | 0.33 | 3 | 61 | 011 | +12.80 | UTE | LTE | LTE | 82 | 510 |
| Bobbin | 35 | 108 | ADI | | 2.46 | 6 | 68 | 015 | +32.45 | UTE | LTE | LTE | 82 | 510 |
| Bobbin | 36 | 1 | NQI | | 0.35 | 3 | 104 | 010 | +5.09 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 36 | 4 | NQI | | 0.29 | 3 | 88 | 013 | +14.43 | UTE | LTE | LTE | 113 | 510 |
| Bobbin | 36 | 11 | NQI | | 0.42 | 3 | 96 | 004 | +29.43 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 36 | 22 | NQI | | 0.49 | P 1 | 111 | 015 | +0.55 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 36 | 30 | NQI | | 0.27 | 3 | 85 | 003 | +7.01 | UTE | LTE | LTE | 18 | 510 |
| Bobbin | 36 | 41 | NQI | | 0.22 | 3 | 83 | 012 | +13.90 | UTE | LTE | LTE | 18 | 510 |
| Bobbin | 36 | 44 | NQI | | 0.47 | P 1 | 87 | 015 | +0.40 | UTE | LTE | LTE | 18 | 510 |
| Bobbin | 36 | 47 | NQI | | 0.31 | 3 | 108 | 011 | +9.12 | UTE | LTE | LTE | 18 | 510 |
| Bobbin | 36 | 49 | NQI | | 0.36 | 3 | 106 | 011 | +26.16 | UTE | LTE | LTE | 18 | 510 |
| Bobbin | 36 | 68 | NQI | | 0.35 | 3 | 108 | 007 | +17.33 | UTE | LTE | LTE | 33 | 510 |
| Bobbin | 36 | 79 | NQI | | 0.30 | 3 | 98 | 006 | +34.98 | UTE | LTE | LTE | 33 | 510 |
| Bobbin | 36 | 85 | NQI | | 0.22 | 3 | 102 | 012 | +30.17 | UTE | LTE | LTE | 33 | 510 |
| Bobbin | 36 | 96 | NQI | | 0.83 | 3 | 78 | 010 | +29.06 | UTE | LTE | LTE | 81 | 510 |
| Bobbin | 36 | 108 | NQI | | 0.58 | P 1 | 31 | 008 | -0.50 | UTE | LTE | LTE | 82 | 510 |
| Bobbin | 36 | 113 | NQI | | 0.51 | 3 | 92 | 015 | +35.22 | UTE | LTE | LTE | 82 | 510 |
| Bobbin | 37 | 4 | ODI | 30 | 0.57 | P 1 | 95 | 014 | +1.10 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 37 | 13 | NQI | | 0.19 | P 1 | 75 | 015 | +0.29 | UTE | LTE | LTE | 113 | 510 |
| Bobbin | 37 | 20 | NQI | | 1.67 | 3 | 123 | 002 | -1.50 to +6.33 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | | | NQI | | 2.89 | 3 | 116 | LTS | +22.65 to +30.76 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 37 | 22 | NQI | | 0.69 | 3 | 108 | 008 | +5.23 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 37 | 24 | NQI | | 0.22 | 3 | 86 | 011 | +6.85 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 37 | 34 | NQI | | 0.26 | 3 | 105 | 001 | +23.01 | UTE | LTE | LTE | 18 | 510 |
| Bobbin | 37 | 41 | NQI | | 0.25 | 3 | 89 | 011 | +22.26 | UTE | LTE | LTE | 18 | 510 |
| Bobbin | 37 | 47 | NQI | | 0.38 | 3 | 95 | 001 | +27.83 | UTE | LTE | LTE | 18 | 510 |
| Bobbin | 37 | 66 | NQI | | 0.35 | 3 | 103 | 001 | +12.93 | UTE | LTE | LTE | 33 | 510 |
| Bobbin | 37 | 74 | NQI | | 0.18 | 3 | 93 | 007 | +30.58 | UTE | LTE | LTE | 33 | 510 |
| Bobbin | | | NQI | | 0.20 | 3 | 90 | 008 | +17.84 | UTE | LTE | LTE | 33 | 510 |
| Bobbin | 38 | 3 | NQI | | 0.64 | P 1 | 78 | 014 | +0.81 | UTE | LTE | LTE | 135 | 510 |
| Bobbin | 38 | 4 | ODI | 13 | 1.52 | 3 | 108 | 014 | +1.09 | UTE | LTE | LTE | 136 | 510 |
| Bobbin | 38 | 66 | NQI | | 0.26 | 3 | 94 | LTS | +24.87 | UTE | LTE | LTE | 46 | 510 |
| Bobbin | 38 | 73 | NQI | | 0.30 | 3 | 79 | 003 | +1.28 | UTE | LTE | LTE | 47 | 510 |
| Bobbin | 38 | 91 | NQI | | 0.40 | 3 | 107 | 007 | +11.10 | UTE | LTE | LTE | 77 | 510 |
| Bobbin | 38 | 115 | NQI | | 0.26 | 3 | 98 | 015 | +34.97 | UTE | LTE | LTE | 77 | 510 |
| Bobbin | | | NQI | | 1.02 | P 1 | 104 | 007 | -0.80 | UTE | LTE | LTE | 77 | 510 |
| Bobbin | 39 | 7 | NQI | | 0.29 | 3 | 97 | 014 | +25.96 | UTE | LTE | LTE | 133 | 510 |
| Bobbin | | | NQI | | 0.31 | 3 | 86 | 014 | +28.33 | UTE | LTE | LTE | 133 | 510 |
| Bobbin | 39 | 35 | NQI | | 0.22 | 3 | 98 | 014 | +2.36 | UTE | LTE | LTE | 105 | 510 |
| Bobbin | 39 | 44 | ODI | 39 | 0.23 | 3 | 94 | 014 | +7.07 | UTE | LTE | LTE | 106 | 510 |
| Bobbin | 39 | 71 | NQI | | 0.40 | 3 | 84 | 006 | +3.99 | UTE | LTE | LTE | 46 | 510 |
| Bobbin | 39 | 109 | NQI | | 0.37 | 3 | 103 | 014 | +6.82 | UTE | LTE | LTE | 77 | 510 |
| Bobbin | 39 | 111 | NQI | | 0.26 | 3 | 82 | 014 | +21.34 | UTE | LTE | LTE | 77 | 510 |
| Bobbin | | | NQI | | 0.20 | P 1 | 97 | 009 | +0.37 | UTE | LTE | LTE | 77 | 510 |
| Bobbin | 39 | 114 | NQI | | 1.16 | P 1 | 88 | 013 | +0.94 | UTE | LTE | LTE | 77 | 510 |
| Bobbin | 39 | 115 | NQI | | 0.53 | 3 | 110 | 012 | +1.44 | UTE | LTE | LTE | 76 | 510 |
| Bobbin | 39 | 116 | ADI | | 2.08 | 6 | 91 | 007 | +24.54 | UTE | LTE | LTE | 77 | 510 |
| Bobbin | | | ODI | 19 | 0.58 | 4 | 111 | 008 | +3.64 | UTE | LTE | LTE | 77 | 510 |
| Bobbin | 40 | 2 | NQI | | 0.51 | P 1 | 101 | 013 | -0.80 | UTE | LTE | LTE | 132 | 510 |
| Bobbin | | | NQI | | 0.81 | P 1 | 84 | 015 | +0.97 | UTE | LTE | LTE | 132 | 510 |
| Bobbin | 40 | 12 | NQI | | 0.28 | P 1 | 110 | 004 | -0.73 | UTE | LTE | LTE | 132 | 510 |
| Bobbin | 40 | 22 | NQI | | 2.76 | 3 | 120 | 002 | -1.44 to +6.52 | LTE | UTE | UTE | 155 | 510 |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
Oconee Nuclear Station - Unit Three
S/G A
04/00 RFO
Bobbin,Sleeve Bobbin

Page 9 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|------|-----|----------|---------|-----------|-----|-------|-------|----------|
| Bobbin | | | | | NQI | 9.91 | 3 | 120 LTS | +22.69 | to +30.69 | LTE | UTE | UTE | 155 510 |
| Bobbin | 40 | 31 | | | NQI | 0.25 | 3 | 95 015 | +34.36 | | UTE | LTE | LTE | 105 510 |
| Bobbin | 40 | 39 | | | NQI | 0.37 | 3 | 83 014 | +7.86 | | UTE | LTE | LTE | 105 510 |
| Bobbin | 40 | 76 | | | NQI | 0.35 | P 1 | 86 014 | +0.34 | | UTE | LTE | LTE | 47 510 |
| Bobbin | 40 | 95 | | | NQI | 0.26 | P 1 | 95 014 | +0.92 | | UTE | LTE | LTE | 76 510 |
| Bobbin | 40 | 100 | | | NQI | 0.28 | 3 | 77 001 | +7.24 | | UTE | LTE | LTE | 77 510 |
| Bobbin | 40 | 112 | | | NQI | 0.61 | 3 | 52 011 | +25.60 | | UTE | LTE | LTE | 77 510 |
| Bobbin | 41 | 41 | | | NQI | 0.31 | 3 | 74 008 | +2.57 | | UTE | LTE | LTE | 101 510 |
| Bobbin | | | | | NQI | 0.36 | 3 | 96 007 | +16.05 | | UTE | LTE | LTE | 101 510 |
| Bobbin | 41 | 87 | | | NQI | 0.37 | 3 | 111 006 | +29.42 | | UTE | LTE | LTE | 46 510 |
| Bobbin | 41 | 103 | | | NQI | 0.82 | 3 | 70 006 | +25.76 | | UTE | LTE | LTE | 76 510 |
| Bobbin | 41 | 113 | | | NQI | 0.46 | P 1 | 104 009 | -0.81 | | UTE | LTE | LTE | 76 510 |
| Bobbin | 42 | 12 | | | NQI | 0.90 | 3 | 113 LTS | +22.94 | to +30.46 | UTE | LTE | LTE | 128 510 |
| Bobbin | 42 | 34 | | | NQI | 0.30 | 3 | 71 002 | +35.78 | | UTE | LTE | LTE | 102 510 |
| Bobbin | | | | | NQI | 0.35 | 3 | 104 004 | +8.02 | | UTE | LTE | LTE | 102 510 |
| Bobbin | 42 | 86 | | | NQI | 0.50 | 3 | 115 006 | +28.82 | | UTE | LTE | LTE | 47 510 |
| Bobbin | 42 | 90 | | | NQI | 0.90 | 3 | 29 005 | +9.85 | | UTE | LTE | LTE | 47 510 |
| Bobbin | 42 | 96 | | | NQI | 0.37 | 3 | 102 011 | +26.22 | | UTE | LTE | LTE | 77 510 |
| Bobbin | 43 | 1 | | | NQI | 0.76 | P 1 | 118 013 | -0.83 | | UTE | LTE | LTE | 129 510 |
| Bobbin | 43 | 7 | | | NQI | 0.34 | P 1 | 104 008 | +0.63 | | UTE | LTE | LTE | 129 510 |
| Bobbin | 43 | 14 | | | NQI | 9.92 | 3 | 107 LTS | +22.77 | to +30.36 | UTE | LTE | LTE | 128 510 |
| Bobbin | 43 | 66 | | | NQI | 0.32 | P 1 | 63 UTS | +6.18 | | UTE | LTE | LTE | 46 510 |
| Bobbin | 43 | 73 | | | NQI | 0.24 | 3 | 93 013 | +15.45 | | UTE | LTE | LTE | 47 510 |
| Bobbin | 43 | 83 | | | NQI | 0.41 | 3 | 80 011 | +17.15 | | UTE | LTE | LTE | 47 510 |
| Bobbin | 43 | 88 | | | NQI | 0.35 | 3 | 75 006 | +31.24 | | UTE | LTE | LTE | 46 510 |
| Bobbin | 43 | 116 | | | NQI | 1.27 | P 1 | 84 009 | -0.53 | | UTE | LTE | LTE | 77 510 |
| Bobbin | 44 | 4 | | | ODI | 0.83 | P 1 | 91 010 | +1.21 | | UTE | LTE | LTE | 128 510 |
| Bobbin | 44 | 34 | | | NQI | 0.47 | 3 | 98 007 | +3.89 | | UTE | LTE | LTE | 101 510 |
| Bobbin | 44 | 38 | | | NQI | 0.40 | 3 | 85 013 | +23.61 | | UTE | LTE | LTE | 101 510 |
| Bobbin | 44 | 66 | | | NQI | 0.51 | 3 | 88 006 | +25.78 | | UTE | LTE | LTE | 46 510 |
| Bobbin | 44 | 67 | | | NQI | 0.36 | 3 | 115 003 | +24.15 | | UTE | LTE | LTE | 47 510 |
| Bobbin | 44 | 103 | | | NQI | 0.47 | 3 | 63 003 | +36.17 | | UTE | LTE | LTE | 77 510 |
| Bobbin | 44 | 107 | | | NQI | 0.45 | 3 | 107 014 | +6.22 | | UTE | LTE | LTE | 77 510 |
| Bobbin | 44 | 115 | | | NQI | 0.36 | P 1 | 93 009 | +0.23 | | UTE | LTE | LTE | 77 510 |
| Bobbin | 45 | 1 | | | NQI | 0.34 | 3 | 92 015 | +23.87 | | UTE | LTE | LTE | 129 510 |
| Bobbin | 45 | 3 | | | NQI | 0.77 | P 1 | 45 UTS | +18.09 | | UTE | LTE | LTE | 129 510 |
| Bobbin | 45 | 32 | | | NQI | 0.33 | P 1 | 101 014 | -0.14 | | UTE | LTE | LTE | 102 510 |
| Bobbin | 45 | 44 | | | NQI | 0.31 | 3 | 93 010 | +17.70 | | UTE | LTE | LTE | 102 510 |
| Bobbin | 45 | 50 | | | NQI | 0.23 | 3 | 79 011 | +18.79 | | UTE | LTE | LTE | 101 510 |
| Bobbin | 45 | 59 | | | NQI | 0.70 | 3 | 95 015 | +1.45 | | UTE | LTE | LTE | 102 510 |
| Bobbin | 45 | 64 | | | NQI | 0.30 | 3 | 83 007 | +4.46 | | UTE | LTE | LTE | 47 510 |
| Bobbin | | | | | NQI | 0.42 | 3 | 68 009 | +26.52 | | UTE | LTE | LTE | 47 510 |
| Bobbin | 45 | 71 | | | NQI | 0.21 | 3 | 104 012 | +21.54 | | UTE | LTE | LTE | 46 510 |
| Bobbin | | | | | NQI | 0.22 | 3 | 75 012 | +15.97 | | UTE | LTE | LTE | 46 510 |
| Bobbin | | | | | NQI | 0.36 | 3 | 95 012 | +12.77 | | UTE | LTE | LTE | 46 510 |
| Bobbin | | | | | NQI | 0.38 | 3 | 89 012 | +20.42 | | UTE | LTE | LTE | 46 510 |
| Bobbin | | | | | NQI | 0.61 | 3 | 115 012 | +13.81 | | UTE | LTE | LTE | 46 510 |
| Bobbin | | | | | NQI | 0.65 | 3 | 100 012 | +22.57 | | UTE | LTE | LTE | 46 510 |
| Bobbin | | | | | NQI | 0.65 | 3 | 110 012 | +14.87 | | UTE | LTE | LTE | 46 510 |
| Bobbin | 45 | 72 | | | NQI | 0.67 | 3 | 62 011 | +18.86 | | UTE | LTE | LTE | 47 510 |
| Bobbin | 45 | 73 | | | ODI | 0.58 | P 1 | 98 014 | +0.41 | | UTE | LTE | LTE | 46 510 |
| Bobbin | 45 | 100 | | | NQI | 0.28 | 3 | 71 013 | +12.67 | | UTE | LTE | LTE | 76 510 |
| Bobbin | 45 | 113 | | | NQI | 0.72 | P 1 | 79 003 | +0.69 | | UTE | LTE | LTE | 77 510 |
| Bobbin | 45 | 117 | | | NQI | 0.90 | P 1 | 81 014 | +0.92 | | UTE | LTE | LTE | 76 510 |
| Bobbin | 46 | 7 | | | ODI | 0.78 | 3 | 102 015 | +1.17 | | UTE | LTE | LTE | 129 510 |
| Bobbin | 46 | 14 | | | NQI | 0.35 | 3 | 97 012 | +33.11 | | UTE | LTE | LTE | 128 510 |
| Bobbin | 46 | 39 | | | NQI | 0.35 | P 1 | 100 014 | +0.98 | | UTE | LTE | LTE | 101 510 |
| Bobbin | 46 | 59 | | | ODI | 1.03 | 3 | 110 015 | +1.76 | | UTE | LTE | LTE | 109 510 |
| Bobbin | 46 | 77 | | | NQI | 0.52 | P 1 | 86 014 | +0.38 | | UTE | LTE | LTE | 47 510 |
| Bobbin | 46 | 105 | | | NQI | 0.50 | 3 | 94 015 | +36.47 | | UTE | LTE | LTE | 76 510 |
| Bobbin | 46 | 119 | | | NQI | 0.58 | P 1 | 110 010 | +0.50 | | UTE | LTE | LTE | 77 510 |
| Bobbin | | | | | NQI | 0.36 | P 1 | 83 010 | +1.32 | | UTE | LTE | LTE | 77 510 |
| Bobbin | 47 | 1 | | | NQI | 0.28 | 3 | 78 015 | +18.91 | | UTE | LTE | LTE | 129 510 |
| Bobbin | | | | | NQI | 2.57 | 3 | 136 015 | +17.59 | | UTE | LTE | LTE | 129 510 |
| Bobbin | 47 | 7 | | | NQI | 0.37 | 3 | 96 002 | +28.00 | | UTE | LTE | LTE | 129 510 |

IDOK

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 10 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|------|-------|-----|-----|----------|---------|---------|-----|-------|-------|----------|
| Bobbin | 47 | 57 | NQI | 0.47 | 3 | 84 | 015 | +30.94 | UTE | LTE | LTE | 109 | 510 | |
| Bobbin | 47 | 71 | NQI | 0.25 | 3 | 64 | 015 | +26.88 | UTE | LTE | LTE | 52 | 510 | |
| Bobbin | 47 | 82 | NQI | 0.28 | 3 | 85 | 004 | +21.80 | UTE | LTE | LTE | 52 | 510 | |
| Bobbin | 47 | 102 | NQI | 0.40 | 3 | 94 | 003 | +26.81 | UTE | LTE | LTE | 76 | 510 | |
| Bobbin | 47 | 104 | NQI | 0.42 | 3 | 77 | 015 | +13.42 | UTE | LTE | LTE | 76 | 510 | |
| Bobbin | 47 | 117 | NQI | 1.28 | P 1 | 92 | 014 | +0.97 | UTE | LTE | LTE | 77 | 510 | |
| Bobbin | 48 | 4 | NQI | 0.32 | P 1 | 80 | UTS | +19.07 | UTE | LTE | LTE | 128 | 510 | |
| Bobbin | 48 | 6 | NQI | 0.29 | 3 | 107 | 015 | +9.35 | UTE | LTE | LTE | 128 | 510 | |
| Bobbin | 48 | 15 | NQI | 0.41 | 3 | 93 | 011 | +26.15 | UTE | LTE | LTE | 129 | 510 | |
| Bobbin | 48 | 31 | NQI | 0.86 | P 1 | 91 | 015 | +0.48 | UTE | LTE | LTE | 102 | 510 | |
| Bobbin | 48 | 33 | NQI | 0.24 | 3 | 66 | 015 | +28.57 | UTE | LTE | LTE | 101 | 510 | |
| Bobbin | 48 | 51 | NQI | 0.73 | 3 | 108 | 012 | +17.30 | UTE | LTE | LTE | 101 | 510 | |
| Bobbin | 48 | 69 | NQI | 0.28 | P 1 | 58 | 014 | +0.36 | UTE | LTE | LTE | 53 | 510 | |
| Bobbin | 48 | 72 | NQI | 0.40 | 3 | 69 | LTS | +22.61 | UTE | LTE | LTE | 52 | 510 | |
| Bobbin | 48 | 74 | NQI | 0.31 | 3 | 101 | 006 | +22.46 | UTE | LTE | LTE | 52 | 510 | |
| Bobbin | 48 | 77 | NQI | 0.35 | P 1 | 77 | 014 | +0.27 | UTE | LTE | LTE | 53 | 510 | |
| Bobbin | 48 | 80 | NQI | 0.21 | P 1 | 100 | 014 | +0.15 | UTE | LTE | LTE | 52 | 510 | |
| Bobbin | 48 | 81 | NQI | 0.29 | P 1 | 81 | 015 | +0.40 | UTE | LTE | LTE | 53 | 510 | |
| Bobbin | 48 | 109 | NQI | 0.33 | 3 | 109 | 010 | +13.19 | UTE | LTE | LTE | 77 | 510 | |
| Bobbin | 48 | 117 | NQI | 0.13 | P 1 | 95 | 015 | -0.12 | UTE | LTE | LTE | 77 | 510 | |
| Bobbin | 49 | 1 | NQI | 0.27 | P 1 | 76 | 015 | -0.04 | UTE | LTE | LTE | 129 | 510 | |
| Bobbin | 49 | 7 | NQI | 0.46 | 3 | 93 | 009 | +24.79 | UTE | LTE | LTE | 129 | 510 | |
| Bobbin | 49 | 46 | NQI | 0.25 | 3 | 85 | 009 | +21.96 | UTE | LTE | LTE | 102 | 510 | |
| Bobbin | 49 | 59 | NQI | 0.30 | 3 | 75 | 007 | +4.94 | UTE | LTE | LTE | 109 | 510 | |
| Bobbin | 49 | 71 | NQI | 0.31 | 3 | 75 | 015 | +44.68 | UTE | LTE | LTE | 52 | 510 | |
| Bobbin | 49 | 106 | NQI | 0.48 | 3 | 101 | 006 | +32.39 | UTE | LTE | LTE | 77 | 510 | |
| Bobbin | | | NQI | 0.88 | 3 | 27 | 009 | +22.19 | UTE | LTE | LTE | 77 | 510 | |
| Bobbin | 49 | 118 | NQI | 0.27 | P 1 | 70 | 015 | +0.23 | UTE | LTE | LTE | 77 | 510 | |
| Bobbin | 49 | 123 | NQI | 0.58 | P 1 | 85 | 011 | +0.74 | UTE | LTE | LTE | 109 | 510 | |
| Bobbin | 50 | 4 | NQI | 0.54 | P 1 | 125 | 010 | +0.53 | UTE | LTE | LTE | 129 | 510 | |
| Bobbin | 50 | 13 | NQI | 0.75 | 3 | 111 | 006 | +34.59 | UTE | LTE | LTE | 128 | 510 | |
| Bobbin | 50 | 23 | NQI | 0.52 | 3 | 88 | 015 | +4.54 | UTE | LTE | LTE | 128 | 510 | |
| Bobbin | 50 | 37 | NQI | 0.49 | 3 | 75 | 014 | +7.81 | UTE | LTE | LTE | 101 | 510 | |
| Bobbin | 50 | 81 | NQI | 0.26 | P 1 | 97 | 014 | +0.29 | UTE | LTE | LTE | 53 | 510 | |
| Bobbin | 50 | 95 | NQI | 0.59 | P 1 | 87 | 014 | +0.51 | UTE | LTE | LTE | 77 | 510 | |
| Bobbin | 51 | 5 | NQI | 0.25 | 3 | 94 | 014 | +1.74 | UTE | LTE | LTE | 129 | 510 | |
| Bobbin | | | NQI | 0.43 | 3 | 83 | 009 | +12.20 | UTE | LTE | LTE | 129 | 510 | |
| Bobbin | | | NQI | 0.48 | 3 | 113 | 009 | +16.70 | UTE | LTE | LTE | 129 | 510 | |
| Bobbin | 51 | 12 | NQI | 0.27 | 3 | 75 | 012 | +8.06 | UTE | LTE | LTE | 128 | 510 | |
| Bobbin | 51 | 56 | NQI | 0.39 | 3 | 69 | 001 | +23.00 | UTE | LTE | LTE | 110 | 510 | |
| Bobbin | 51 | 62 | NQI | 0.40 | 3 | 98 | 012 | +32.23 | UTE | LTE | LTE | 110 | 510 | |
| Bobbin | 51 | 65 | NQI | 0.41 | 3 | 74 | 007 | +20.37 | UTE | LTE | LTE | 60 | 510 | |
| Bobbin | 51 | 72 | NQI | 0.28 | 3 | 85 | 013 | +24.42 | UTE | LTE | LTE | 52 | 510 | |
| Bobbin | 51 | 75 | NQI | 0.27 | 3 | 63 | 015 | +19.69 | UTE | LTE | LTE | 53 | 510 | |
| Bobbin | 51 | 92 | NQI | 0.29 | 3 | 85 | 006 | +28.14 | UTE | LTE | LTE | 52 | 510 | |
| Bobbin | 51 | 95 | NQI | 0.28 | P 1 | 95 | 014 | +0.22 | UTE | LTE | LTE | 76 | 510 | |
| Bobbin | 51 | 110 | NQI | 0.41 | 3 | 103 | 014 | +3.66 | UTE | LTE | LTE | 77 | 510 | |
| Bobbin | 51 | 123 | NQI | 0.35 | P 1 | 130 | 009 | -0.75 | UTE | LTE | LTE | 76 | 510 | |
| Bobbin | | | NQI | 0.39 | P 1 | 52 | 010 | +0.29 | UTE | LTE | LTE | 76 | 510 | |
| Bobbin | 52 | 2 | NQI | 0.71 | P 1 | 105 | 011 | +0.59 | UTE | LTE | LTE | 129 | 510 | |
| Bobbin | 52 | 16 | NQI | 0.24 | 3 | 63 | 013 | +16.65 | UTE | LTE | LTE | 129 | 510 | |
| Bobbin | 52 | 40 | NQI | 0.40 | 3 | 103 | 007 | +13.48 | UTE | LTE | LTE | 98 | 510 | |
| Bobbin | 52 | 43 | NQI | 0.35 | 3 | 98 | 006 | +11.30 | UTE | LTE | LTE | 97 | 510 | |
| Bobbin | 52 | 52 | NQI | 0.31 | 3 | 72 | 015 | +13.93 | UTE | LTE | LTE | 110 | 510 | |
| Bobbin | 52 | 71 | NQI | 0.37 | 3 | 141 | 003 | +28.15 | UTE | LTE | LTE | 52 | 510 | |
| Bobbin | 52 | 72 | NQI | 0.28 | 3 | 98 | 002 | +29.11 | UTE | LTE | LTE | 53 | 510 | |
| Bobbin | 52 | 83 | NQI | 0.42 | P 1 | 86 | 014 | +0.02 | UTE | LTE | LTE | 52 | 510 | |
| Bobbin | 52 | 84 | NQI | 0.51 | P 1 | 93 | 014 | +0.27 | UTE | LTE | LTE | 53 | 510 | |
| Bobbin | 52 | 119 | NQI | 0.23 | P 1 | 98 | 015 | +0.20 | UTE | LTE | LTE | 76 | 510 | |
| Bobbin | 53 | 1 | NQI | 0.87 | P 1 | 112 | 013 | -0.62 | UTE | LTE | LTE | 129 | 510 | |
| Bobbin | 53 | 2 | NQI | 0.63 | 3 | 117 | 010 | +6.58 | UTE | LTE | LTE | 128 | 510 | |
| Bobbin | | | NQI | 0.68 | P 1 | 103 | 011 | +0.54 | UTE | LTE | LTE | 128 | 510 | |
| Bobbin | 53 | 3 | NQI | 0.48 | P 1 | 108 | 011 | +0.67 | UTE | LTE | LTE | 129 | 510 | |
| Bobbin | 53 | 35 | NQI | 0.31 | 3 | 124 | 007 | +7.13 | UTE | LTE | LTE | 98 | 510 | |
| Bobbin | 53 | 50 | NQI | 0.29 | 3 | 78 | LTS | +9.80 | UTE | LTE | LTE | 110 | 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 11 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|------|-------|-----|-----|------------------|---------|---------|-----|-------|-------|----------|
| Bobbin | 53 | 53 | NQI | 0.32 | 3 | 89 | 015 | +38.11 | UTE | LTE | LTE | 109 | 510 | |
| Bobbin | | | NQI | 0.30 | P 1 | 86 | 007 | -0.33 | UTE | LTE | LTE | 109 | 510 | |
| Bobbin | 53 | 56 | NQI | 0.42 | 3 | 72 | 005 | +7.17 | UTE | LTE | LTE | 110 | 510 | |
| Bobbin | 53 | 75 | NQI | 0.34 | P 1 | 79 | 003 | +0.29 | UTE | LTE | LTE | 53 | 510 | |
| Bobbin | 53 | 113 | NQI | 0.30 | 3 | 76 | 013 | +17.63 | UTE | LTE | LTE | 72 | 510 | |
| Bobbin | 53 | 122 | NQI | 0.51 | P 1 | 84 | 015 | +0.23 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | 53 | 125 | NQI | 0.43 | 3 | 112 | 010 | +14.73 to +26.46 | UTE | LTE | LTE | 72 | 510 | |
| Bobbin | 54 | 1 | NQI | 0.68 | 3 | 70 | 014 | +3.49 to +6.88 | UTE | LTE | LTE | 129 | 510 | |
| Bobbin | 54 | 2 | ODI | 2.70 | P 1 | 95 | 013 | -0.78 | UTE | LTE | LTE | 128 | 510 | |
| Bobbin | 54 | 3 | NQI | 1.17 | P 1 | 105 | 011 | +0.68 | UTE | LTE | LTE | 129 | 510 | |
| Bobbin | 54 | 4 | NQI | 0.64 | P 1 | 69 | LTE | +6.38 | UTE | LTE | LTE | 128 | 510 | |
| Bobbin | 54 | 5 | NQI | 0.43 | 3 | 90 | 015 | +35.01 | UTE | LTE | LTE | 129 | 510 | |
| Bobbin | | | NQI | 0.70 | 3 | 107 | 015 | +24.10 | UTE | LTE | LTE | 129 | 510 | |
| Bobbin | 54 | 43 | NQI | 0.32 | 3 | 101 | 007 | +16.09 | UTE | LTE | LTE | 98 | 510 | |
| Bobbin | 54 | 45 | NQI | 0.84 | P 1 | 98 | 015 | +0.75 | UTE | LTE | LTE | 98 | 510 | |
| Bobbin | 54 | 67 | NQI | 0.37 | 3 | 92 | 013 | +11.84 | UTE | LTE | LTE | 65 | 510 | |
| Bobbin | 54 | 73 | NQI | 0.54 | 3 | 53 | 013 | +25.77 | UTE | LTE | LTE | 53 | 510 | |
| Bobbin | 54 | 80 | NQI | 0.53 | 3 | 118 | 003 | +8.23 | UTE | LTE | LTE | 52 | 510 | |
| Bobbin | 54 | 88 | NQI | 0.32 | 3 | 106 | 015 | +31.77 | UTE | LTE | LTE | 52 | 510 | |
| Bobbin | 54 | 109 | NQI | 0.28 | 3 | 82 | LTS | +30.54 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | 54 | 121 | NQI | 0.57 | P 1 | 107 | 009 | -0.54 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | 54 | 124 | NQI | 0.70 | P 1 | 139 | 009 | -0.68 | UTE | LTE | LTE | 72 | 510 | |
| Bobbin | 54 | 127 | NQI | 0.51 | 3 | 110 | 012 | +4.56 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | 55 | 1 | NQI | 0.64 | P 1 | 107 | 013 | -0.71 | UTE | LTE | LTE | 129 | 510 | |
| Bobbin | | | NQI | 0.65 | P 1 | 104 | 012 | -0.75 | UTE | LTE | LTE | 129 | 510 | |
| Bobbin | 55 | 11 | NQI | 0.60 | 3 | 114 | 011 | +32.00 | UTE | LTE | LTE | 128 | 510 | |
| Bobbin | 55 | 12 | NQI | 0.24 | P 1 | 81 | 014 | +0.35 | UTE | LTE | LTE | 129 | 510 | |
| Bobbin | 55 | 29 | NQI | 0.34 | 3 | 90 | 008 | +22.72 | UTE | LTE | LTE | 129 | 510 | |
| Bobbin | | | NQI | 0.37 | 3 | 53 | 007 | +35.03 | UTE | LTE | LTE | 129 | 510 | |
| Bobbin | 55 | 42 | NQI | 0.33 | 3 | 77 | 006 | +10.81 | UTE | LTE | LTE | 97 | 510 | |
| Bobbin | 55 | 46 | NQI | 0.45 | P 1 | 63 | 013 | -0.44 | UTE | LTE | LTE | 135 | 510 | |
| Bobbin | 55 | 48 | NQI | 0.27 | 3 | 102 | 006 | +16.11 | UTE | LTE | LTE | 97 | 510 | |
| Bobbin | 55 | 73 | NQI | 0.40 | 3 | 110 | 010 | +10.21 | UTE | LTE | LTE | 53 | 510 | |
| Bobbin | 55 | 115 | NQI | 0.42 | 3 | 97 | 009 | +24.25 | UTE | LTE | LTE | 72 | 510 | |
| Bobbin | 55 | 121 | NQI | 0.92 | P 1 | 120 | 008 | -0.71 | UTE | LTE | LTE | 72 | 510 | |
| Bobbin | 55 | 123 | NQI | 0.69 | P 1 | 103 | 009 | -0.68 | UTE | LTE | LTE | 72 | 510 | |
| Bobbin | 55 | 124 | NQI | 0.79 | 3 | 111 | 009 | +29.95 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | | | NQI | 0.78 | P 1 | 133 | 009 | -0.71 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | 55 | 125 | NQI | 0.38 | P 1 | 111 | 011 | -0.53 | UTE | LTE | LTE | 72 | 510 | |
| Bobbin | | | NQI | 0.62 | P 1 | 125 | 010 | +0.49 | UTE | LTE | LTE | 72 | 510 | |
| Bobbin | 55 | 126 | NQI | 0.28 | P 1 | 86 | 011 | +0.23 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | 56 | 4 | NQI | 0.69 | P 1 | 121 | 011 | -0.80 | UTE | LTE | LTE | 129 | 510 | |
| Bobbin | 56 | 6 | NQI | 0.43 | 3 | 98 | 014 | +33.51 | UTE | LTE | LTE | 128 | 510 | |
| Bobbin | 56 | 15 | NQI | 0.57 | 3 | 79 | 005 | +12.94 | UTE | LTE | LTE | 129 | 510 | |
| Bobbin | 56 | 18 | NQI | 3.72 | 3 | 114 | LTS | +22.41 to +29.81 | UTE | LTE | LTE | 128 | 510 | |
| Bobbin | 56 | 25 | NQI | 0.37 | 3 | 66 | 008 | +29.62 | UTE | LTE | LTE | 129 | 510 | |
| Bobbin | 56 | 36 | NQI | 2.82 | 3 | 120 | 001 | +36.61 | UTE | LTE | LTE | 98 | 510 | |
| Bobbin | | | NQI | 4.24 | 3 | 115 | LTS | +22.44 to +31.18 | UTE | LTE | LTE | 98 | 510 | |
| Bobbin | | | NQI | 1.36 | P 1 | 91 | 002 | -0.26 to +7.28 | UTE | LTE | LTE | 98 | 510 | |
| Bobbin | 56 | 50 | NQI | 3.22 | 3 | 15 | 007 | +13.41 | UTE | LTE | LTE | 135 | 510 | |
| Bobbin | 56 | 59 | NQI | 0.26 | 3 | 88 | 011 | +34.49 | UTE | LTE | LTE | 109 | 510 | |
| Bobbin | 56 | 74 | NQI | 0.31 | 3 | 111 | 006 | +28.32 | UTE | LTE | LTE | 52 | 510 | |
| Bobbin | 56 | 84 | NQI | 2.30 | 3 | 113 | LTS | +26.18 | UTE | LTE | LTE | 52 | 510 | |
| Bobbin | | | NQI | 7.15 | 3 | 111 | LTS | +24.25 | UTE | LTE | LTE | 52 | 510 | |
| Bobbin | 56 | 87 | NQI | 0.27 | 3 | 78 | 015 | +19.27 | UTE | LTE | LTE | 53 | 510 | |
| Bobbin | 56 | 121 | NQI | 0.58 | P 1 | 105 | 009 | -0.66 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | 56 | 124 | NQI | 0.62 | P 1 | 104 | 010 | +0.43 | UTE | LTE | LTE | 72 | 510 | |
| Bobbin | 56 | 126 | NQI | 0.32 | 3 | 73 | 010 | +21.41 | UTE | LTE | LTE | 72 | 510 | |
| Bobbin | | | NQI | 0.33 | 3 | 106 | 010 | +25.14 | UTE | LTE | LTE | 72 | 510 | |
| Bobbin | 56 | 127 | NQI | 0.40 | 3 | 99 | 011 | +8.95 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | | | NQI | 0.67 | 3 | 112 | 011 | +7.34 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | 57 | 1 | NQI | 1.18 | 3 | 123 | 014 | +7.20 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | | | NQI | 0.70 | P 1 | 139 | 011 | -0.73 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | 57 | 2 | NQI | 1.36 | P 1 | 101 | 013 | -0.81 | 014 | LTE | LTE | 145 | 510 | |
| Bobbin | 57 | 3 | NQI | 1.99 | 3 | 126 | 014 | +1.19 | UTE | LTE | LTE | 129 | 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 12 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | *TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|----------|-----|-----|------------------|---------|---------|-----|-------|-------|----------|
| Bobbin | 57 | 4 | NQI | | 0.57 P 1 | 112 | 012 | +0.69 | UTE | LTE | LTE | 128 | 510 | |
| Bobbin | 57 | 12 | NQI | | 1.06 3 | 83 | 004 | +26.42 | UTE | LTE | LTE | 128 | 510 | |
| Bobbin | 57 | 32 | NQI | | 0.52 3 | 109 | 004 | +23.46 | UTE | LTE | LTE | 128 | 510 | |
| Bobbin | 57 | 34 | NQI | | 0.59 3 | 90 | 006 | +32.79 | UTE | LTE | LTE | 98 | 510 | |
| Bobbin | 57 | 50 | NQI | | 0.30 3 | 100 | 006 | +7.85 | UTE | LTE | LTE | 97 | 510 | |
| Bobbin | 57 | 79 | NQI | | 0.36 3 | 111 | 008 | +2.85 | UTE | LTE | LTE | 52 | 510 | |
| Bobbin | 57 | 85 | NQI | | 0.32 3 | 101 | 014 | +32.43 | UTE | LTE | LTE | 52 | 510 | |
| Bobbin | 57 | 102 | NQI | | 0.21 3 | 90 | 012 | +34.08 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | | | NQI | | 0.28 3 | 86 | 010 | +10.21 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | | | NQI | | 0.28 3 | 95 | 012 | +27.52 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | | | NQI | | 0.31 3 | 97 | 010 | +6.81 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | | | NQI | | 0.38 3 | 107 | 012 | +7.82 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | | | NQI | | 0.61 3 | 113 | 011 | +11.13 to +21.55 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | 57 | 103 | NQI | | 0.22 3 | 93 | 008 | +20.64 | UTE | LTE | LTE | 72 | 510 | |
| Bobbin | 57 | 112 | NQI | | 0.41 3 | 69 | 003 | +2.60 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | 57 | 124 | NQI | | 0.26 P 1 | 116 | 015 | +0.27 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | | | NQI | | 1.17 P 1 | 123 | 009 | -0.71 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | | | NQI | | 0.78 3 | 107 | 009 | +22.46 to +28.19 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | 57 | 125 | NQI | | 0.36 3 | 111 | 011 | +35.31 | UTE | LTE | LTE | 72 | 510 | |
| Bobbin | 57 | 127 | NQI | | 0.35 3 | 110 | 010 | +27.35 | UTE | LTE | LTE | 72 | 510 | |
| Bobbin | 57 | 128 | NQI | | 0.38 3 | 103 | 011 | +5.61 to +11.87 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | 58 | 1 | NQI | | 0.53 3 | 98 | 012 | +7.24 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | | | NQI | | 0.90 3 | 114 | 014 | +7.31 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | 58 | 2 | NQI | | 0.40 P 1 | 100 | 012 | -0.69 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | | | NQI | | 0.41 P 1 | 108 | 010 | +0.52 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | | | NQI | | 1.03 P 1 | 115 | 014 | -0.64 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | | | NQI | | 1.23 P 1 | 110 | 013 | -0.78 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | 58 | 3 | NQI | | 1.02 P 1 | 96 | 011 | -0.48 | 014 | LTE | LTE | 145 | 510 | |
| Bobbin | | | ODI | 39 | 0.36 P 1 | 89 | 012 | +1.08 | 014 | LTE | LTE | 145 | 510 | |
| Bobbin | 58 | 4 | NQI | | 0.38 P 1 | 85 | 011 | -0.73 | UTE | LTE | LTE | 122 | 510 | |
| Bobbin | 58 | 12 | NQI | | 0.73 3 | 99 | 015 | +2.29 | UTE | LTE | LTE | 122 | 510 | |
| Bobbin | 58 | 20 | NQI | | 0.33 3 | 83 | 010 | +28.78 | UTE | LTE | LTE | 122 | 510 | |
| Bobbin | 58 | 66 | NQI | | 0.32 P 1 | 89 | 002 | -0.83 | UTE | LTE | LTE | 64 | 510 | |
| Bobbin | 58 | 89 | NQI | | 0.34 3 | 100 | 015 | +32.12 | UTE | LTE | LTE | 52 | 510 | |
| Bobbin | 58 | 103 | NQI | | 0.19 3 | 107 | 007 | +16.73 | UTE | LTE | LTE | 72 | 510 | |
| Bobbin | | | NQI | | 0.29 3 | 107 | 008 | +5.58 | UTE | LTE | LTE | 72 | 510 | |
| Bobbin | 58 | 109 | NQI | | 0.69 3 | 133 | 015 | +9.96 | UTE | LTE | LTE | 72 | 510 | |
| Bobbin | 58 | 114 | NQI | | 0.37 3 | 98 | 009 | +18.09 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | 58 | 122 | NQI | | 1.07 P 1 | 100 | 009 | -0.69 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | 58 | 125 | NQI | | 1.07 P 1 | 118 | 009 | -0.71 | UTE | LTE | LTE | 72 | 510 | |
| Bobbin | 58 | 126 | NQI | | 0.51 3 | 95 | 009 | +32.21 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | | | NQI | | 0.91 3 | 113 | 009 | +34.62 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | | | NQI | | 0.38 P 1 | 68 | 006 | -0.48 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | | | NQI | | 0.75 P 1 | 109 | 011 | -0.77 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | | | NQI | | 0.39 3 | 99 | 009 | +36.88 to +38.95 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | 58 | 128 | NQI | | 0.63 3 | 90 | 010 | +27.30 to +34.50 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | 58 | 129 | NQI | | 0.46 3 | 98 | 011 | +11.83 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | 59 | 9 | NQI | | 0.46 3 | 62 | 012 | +18.16 | UTE | LTE | LTE | 121 | 510 | |
| Bobbin | 59 | 28 | NQI | | 0.39 3 | 105 | 004 | +34.15 | UTE | LTE | LTE | 121 | 510 | |
| Bobbin | 59 | 29 | NQI | | 0.17 P 1 | 106 | 005 | -0.61 | UTE | LTE | LTE | 122 | 510 | |
| Bobbin | 59 | 31 | ADI | | 2.99 6 | 79 | LTS | +21.51 to +30.82 | UTE | LTE | LTE | 122 | 510 | |
| Bobbin | 59 | 36 | ODI | 12 | 1.08 4 | 131 | LTS | +24.90 | UTE | LTE | LTE | 97 | 510 | |
| Bobbin | | | ODI | 18 | 2.52 4 | 125 | LTS | +30.35 | UTE | LTE | LTE | 97 | 510 | |
| Bobbin | 59 | 40 | NQI | | 0.25 P 1 | 95 | 012 | +0.31 | UTE | LTE | LTE | 97 | 510 | |
| Bobbin | | | NQI | | 0.61 3 | 69 | 015 | +2.98 to +12.27 | UTE | LTE | LTE | 97 | 510 | |
| Bobbin | 59 | 71 | NQI | | 0.40 3 | 59 | 007 | +28.05 | UTE | LTE | LTE | 52 | 510 | |
| Bobbin | 59 | 77 | NQI | | 0.22 3 | 110 | 013 | +12.14 | UTE | LTE | LTE | 52 | 510 | |
| Bobbin | 59 | 114 | NQI | | 0.31 3 | 80 | 009 | +28.93 | UTE | LTE | LTE | 72 | 510 | |
| Bobbin | 59 | 117 | NQI | | 0.42 P 1 | 89 | 009 | -0.78 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | 59 | 120 | NQI | | 0.86 P 1 | 112 | 009 | -0.73 | UTE | LTE | LTE | 72 | 510 | |
| Bobbin | 59 | 121 | NQI | | 0.44 P 1 | 108 | 010 | +0.38 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | | | NQI | | 0.78 3 | 100 | 009 | +20.92 to +30.07 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | 59 | 124 | NQI | | 0.37 3 | 81 | 010 | +16.96 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | | | NQI | | 0.60 3 | 113 | 010 | +16.03 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | | | NQI | | 0.73 3 | 115 | 011 | +7.83 | UTE | LTE | LTE | 73 | 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 13 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|-------|-----|----------|------------------|---------|-----|-------|-------|----------|
| Bobbin | | | | | NQI | 0.43 | P 1 | 51 011 | +0.27 | UTE | LTE | LTE | 73 | 510 |
| Bobbin | 60 | 1 | | | NQI | 0.44 | P 1 | 85 014 | +0.21 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | | | | | NQI | 0.88 | P 1 | 114 012 | +0.64 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | 60 | 3 | | | NQI | 0.70 | P 1 | 85 011 | -0.75 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | 60 | 17 | | | NQI | 0.27 | 3 | 63 013 | +30.48 | UTE | LTE | LTE | 122 | 510 |
| Bobbin | | | | | NQI | 0.22 | P 1 | 82 014 | +0.00 | UTE | LTE | LTE | 122 | 510 |
| Bobbin | 60 | 18 | | | NQI | 0.50 | P 1 | 95 015 | +0.39 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | 60 | 67 | | | NQI | 0.28 | P 1 | 99 002 | -0.77 | UTE | LTE | LTE | 64 | 510 |
| Bobbin | 60 | 80 | | | NQI | 0.52 | P 1 | 111 005 | +0.72 | UTE | LTE | LTE | 57 | 510 |
| Bobbin | 60 | 82 | | | NQI | 0.31 | 3 | 116 006 | +22.90 | UTE | LTE | LTE | 57 | 510 |
| Bobbin | 60 | 125 | | | NQI | 0.66 | P 1 | 113 009 | -0.69 | UTE | LTE | LTE | 73 | 510 |
| Bobbin | | | | | NQI | 0.48 | 3 | 87 009 | +13.29 to +28.88 | UTE | LTE | LTE | 73 | 510 |
| Bobbin | 60 | 126 | | | NQI | 0.49 | P 1 | 73 009 | -0.66 | UTE | LTE | LTE | 72 | 510 |
| Bobbin | 60 | 129 | | | NQI | 0.50 | 3 | 107 011 | +7.55 | UTE | LTE | LTE | 73 | 510 |
| Bobbin | 61 | 1 | | | NQI | 0.42 | 3 | 103 014 | +4.36 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | | | | | NQI | 0.32 | P 1 | 126 011 | -0.02 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | | | | | NQI | 0.42 | P 1 | 137 012 | -0.09 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | | | | | NQI | 0.49 | P 1 | 119 009 | +0.66 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | | | | | NQI | 0.54 | P 1 | 112 011 | +0.51 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | | | | | NQI | 0.84 | P 1 | 114 011 | -0.70 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | 61 | 3 | | | NQI | 0.44 | P 1 | 100 011 | -0.71 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | | | | | NQI | 0.61 | P 1 | 139 010 | -0.74 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | | | | | NQI | 1.65 | P 1 | 120 013 | -0.70 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | 61 | 4 | | | NQI | 0.37 | 3 | 107 012 | +1.19 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | 61 | 15 | | | NQI | 0.36 | 3 | 88 011 | +15.51 | UTE | LTE | LTE | 122 | 510 |
| Bobbin | 61 | 32 | | | NQI | 0.43 | 3 | 106 009 | +16.52 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | 61 | 57 | | | NQI | 0.58 | 3 | 65 002 | +2.21 | LTE | UTE | UTE | 5 | 510 |
| Bobbin | 61 | 71 | | | NQI | 0.30 | P 1 | 64 009 | -0.04 | UTE | LTE | LTE | 61 | 510 |
| Bobbin | 61 | 86 | | | NQI | 0.69 | P 1 | 91 015 | +0.88 | UTE | LTE | LTE | 56 | 510 |
| Bobbin | 61 | 98 | | | NQI | 0.45 | 3 | 113 015 | +9.81 | UTE | LTE | LTE | 73 | 510 |
| Bobbin | 61 | 102 | | | NQI | 0.34 | 3 | 93 006 | +28.23 | UTE | LTE | LTE | 73 | 510 |
| Bobbin | 61 | 112 | | | NQI | 0.51 | P 1 | 51 004 | -0.29 | UTE | LTE | LTE | 73 | 510 |
| Bobbin | 61 | 116 | | | NQI | 0.40 | 3 | 91 015 | +13.88 | UTE | LTE | LTE | 73 | 510 |
| Bobbin | 61 | 121 | | | NQI | 0.67 | 3 | 112 014 | +1.30 | UTE | LTE | LTE | 72 | 510 |
| Bobbin | 61 | 122 | | | NQI | 0.44 | 3 | 76 009 | +18.82 to +28.94 | UTE | LTE | LTE | 73 | 510 |
| Bobbin | 62 | 20 | | | NQI | 0.59 | 3 | 105 015 | +37.74 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | | | | | NQI | 0.35 | P 1 | 72 005 | -0.60 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | 62 | 23 | | | NQI | 0.32 | 3 | 97 015 | +35.35 | UTE | LTE | LTE | 122 | 510 |
| Bobbin | 62 | 78 | | | NQI | 0.35 | 3 | 101 006 | +19.93 | UTE | LTE | LTE | 57 | 510 |
| Bobbin | 62 | 92 | | | NQI | 0.32 | 3 | 112 005 | +21.15 | UTE | LTE | LTE | 57 | 510 |
| Bobbin | 62 | 115 | | | NQI | 1.15 | 3 | 51 003 | +32.63 | UTE | LTE | LTE | 72 | 510 |
| Bobbin | 62 | 125 | | | NQI | 0.28 | P 1 | 97 009 | +0.11 | UTE | LTE | LTE | 73 | 510 |
| Bobbin | 62 | 126 | | | NQI | 0.70 | P 1 | 77 009 | -0.66 | UTE | LTE | LTE | 73 | 510 |
| Bobbin | 63 | 1 | | | NQI | 0.24 | P 1 | 97 011 | +0.05 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | 63 | 2 | | | NQI | 0.45 | P 1 | 77 012 | +0.62 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | 63 | 4 | | | NQI | 1.86 | P 1 | 85 012 | +0.77 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | 63 | 21 | | | NQI | 0.38 | 3 | 88 002 | +12.89 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | 63 | 22 | | | ADI | 1.32 | 6 | 52 015 | +35.97 | UTE | LTE | LTE | 122 | 510 |
| Bobbin | 63 | 25 | | | ADI | 1.15 | 6 | 58 015 | +34.58 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | 63 | 26 | | | NQI | 0.27 | 3 | 107 007 | +11.25 | UTE | LTE | LTE | 122 | 510 |
| Bobbin | 63 | 34 | | | ADI | 12.75 | 6 | 94 LTS | +21.86 to +30.37 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | 63 | 59 | | | NQI | 0.17 | P 1 | 112 013 | +0.00 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 63 | 61 | | | NQI | 0.15 | P 1 | 102 014 | +0.15 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 63 | 89 | | | NQI | 0.34 | 3 | 117 012 | +10.17 | UTE | LTE | LTE | 57 | 510 |
| Bobbin | 63 | 95 | | | NQI | 0.40 | 3 | 57 002 | +32.12 | UTE | LTE | LTE | 57 | 510 |
| Bobbin | 63 | 122 | | | NQI | 0.49 | P 1 | 97 007 | +0.58 | UTE | LTE | LTE | 73 | 510 |
| Bobbin | 63 | 124 | | | NQI | 0.30 | P 1 | 95 005 | -0.13 | UTE | LTE | LTE | 73 | 510 |
| Bobbin | 63 | 126 | | | NQI | 0.37 | 3 | 117 009 | +19.29 | UTE | LTE | LTE | 73 | 510 |
| Bobbin | 63 | 127 | | | NQI | 0.52 | P 1 | 136 009 | -0.69 | UTE | LTE | LTE | 72 | 510 |
| Bobbin | 64 | 2 | | | NQI | 0.33 | P 1 | 67 014 | +0.99 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | | | | | NQI | 1.01 | P 1 | 115 011 | +0.57 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | 64 | 6 | | | NQI | 0.18 | P 1 | 93 014 | +1.02 | UTE | LTE | LTE | 122 | 510 |
| Bobbin | 64 | 10 | | | NQI | 0.35 | 3 | 104 LTS | +8.73 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | 64 | 12 | | | NQI | 0.42 | 3 | 118 UTS | -0.41 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | 64 | 15 | | | NQI | 0.23 | P 1 | 96 009 | +0.27 | UTE | LTE | LTE | 122 | 510 |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 14 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|-----|-----|----------|------------------|---------|-----|-------|-------|----------|
| Bobbin | 64 | 16 | NQI | | 0.59 | 3 | | 108 015 | +36.33 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | 64 | 35 | NQI | | 0.32 | 3 | | 90 015 | +8.07 | UTE | LTE | LTE | 98 | 510 |
| Bobbin | | | NQI | | 0.39 | 3 | | 65 006 | +34.23 | UTE | LTE | LTE | 98 | 510 |
| Bobbin | 64 | 43 | NQI | | 0.53 | 3 | | 80 015 | +24.30 | UTE | LTE | LTE | 98 | 510 |
| Bobbin | 64 | 45 | NQI | | 0.34 | 3 | | 77 010 | +21.77 | UTE | LTE | LTE | 98 | 510 |
| Bobbin | 64 | 48 | NQI | | 1.03 | 3 | | 65 008 | +28.53 | UTE | LTE | LTE | 97 | 510 |
| Bobbin | 64 | 61 | NQI | | 0.30 | 3 | | 85 010 | +27.76 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 64 | 74 | NQI | | 0.47 | P 1 | | 87 UTS | +1.85 | UTE | LTE | LTE | 56 | 510 |
| Bobbin | 64 | 126 | NQI | | 0.68 | P 1 | | 125 009 | -0.76 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | 65 | 3 | NQI | | 0.49 | P 1 | | 105 013 | -0.82 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | 65 | 18 | NQI | | 0.40 | P 1 | | 89 004 | -0.75 | UTE | LTE | LTE | 122 | 510 |
| Bobbin | 65 | 36 | NQI | | 0.29 | P 1 | | 97 015 | +0.07 | UTE | LTE | LTE | 98 | 510 |
| Bobbin | 65 | 38 | NQI | | 1.99 | 3 | | 107 LTS | +22.06 to +30.38 | UTE | LTE | LTE | 98 | 510 |
| Bobbin | 65 | 40 | NQI | | 0.53 | 3 | | 73 007 | +16.14 | UTE | LTE | LTE | 98 | 510 |
| Bobbin | 65 | 43 | NQI | | 0.56 | P 1 | | 87 005 | +0.46 | UTE | LTE | LTE | 97 | 510 |
| Bobbin | | | NQI | | 0.72 | P 1 | | 99 006 | +0.63 | UTE | LTE | LTE | 97 | 510 |
| Bobbin | 65 | 50 | NQI | | 0.41 | 3 | | 90 010 | +28.36 | UTE | LTE | LTE | 98 | 510 |
| Bobbin | 65 | 58 | NQI | | 0.59 | P 1 | | 39 004 | +0.94 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 65 | 63 | ODI | 1 | 0.38 | 3 | | 114 006 | +28.93 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 65 | 67 | NQI | | 0.38 | 3 | | 25 002 | +12.17 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 65 | 70 | NQI | | 0.51 | 3 | | 74 015 | +31.26 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 65 | 73 | NQI | | 0.34 | 3 | | 101 006 | +27.64 | UTE | LTE | LTE | 57 | 510 |
| Bobbin | | | NQI | | 0.40 | 3 | | 61 006 | +29.08 | UTE | LTE | LTE | 57 | 510 |
| Bobbin | 65 | 82 | NQI | | 0.23 | 3 | | 95 010 | +21.96 | UTE | LTE | LTE | 56 | 510 |
| Bobbin | 65 | 125 | NQI | | 0.77 | P 1 | | 116 008 | -0.65 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | 65 | 126 | NQI | | 0.49 | 3 | | 111 013 | +31.16 | UTE | LTE | LTE | 68 | 510 |
| Bobbin | 65 | 130 | NQI | | 1.19 | P 1 | | 46 011 | +0.02 | UTE | LTE | LTE | 82 | 510 |
| Bobbin | 66 | 1 | NQI | | 0.43 | 3 | | 68 014 | +12.68 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | 66 | 3 | NQI | | 0.35 | P 1 | | 105 010 | +0.61 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | | | NQI | | 0.36 | P 1 | | 105 011 | -0.70 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | 66 | 18 | ADI | | 45.99 | 6 | | 89 LTS | +21.64 to +29.87 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | 66 | 37 | NQI | | 0.33 | 3 | | 101 006 | +16.07 | UTE | LTE | LTE | 98 | 510 |
| Bobbin | | | NQI | | 0.60 | 3 | | 111 010 | +34.04 | UTE | LTE | LTE | 98 | 510 |
| Bobbin | 66 | 45 | NQI | | 0.30 | P 1 | | 76 006 | +0.64 | UTE | LTE | LTE | 98 | 510 |
| Bobbin | 66 | 58 | NQI | | 0.64 | P 1 | | 98 UTS | +17.25 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 66 | 65 | ODI | 18 | 0.30 | 3 | | 106 012 | +27.97 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 66 | 69 | NQI | | 0.25 | 3 | | 77 LTS | +9.35 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 66 | 73 | NQI | | 0.77 | 3 | | 86 008 | +28.92 | UTE | LTE | LTE | 56 | 510 |
| Bobbin | 66 | 126 | NQI | | 0.39 | P 1 | | 118 008 | -0.71 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | | | NQI | | 0.99 | P 1 | | 98 008 | +0.65 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | 67 | 2 | NQI | | 0.65 | 3 | | 105 010 | +5.63 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | | | NQI | | 0.60 | P 1 | | 115 011 | -0.64 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | 67 | 7 | NQI | | 0.40 | P 1 | | 90 004 | -0.75 | UTE | LTE | LTE | 122 | 510 |
| Bobbin | 67 | 11 | NQI | | 0.49 | P 1 | | 126 012 | +0.51 | UTE | LTE | LTE | 122 | 510 |
| Bobbin | 67 | 15 | NQI | | 0.31 | P 1 | | 94 011 | +0.18 | UTE | LTE | LTE | 122 | 510 |
| Bobbin | 67 | 26 | NQI | | 0.57 | P 1 | | 114 009 | +0.55 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | 67 | 27 | NQI | | 0.26 | P 1 | | 116 009 | +0.49 | UTE | LTE | LTE | 122 | 510 |
| Bobbin | 67 | 28 | NQI | | 0.32 | 3 | | 101 012 | +19.43 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | 67 | 37 | NQI | | 0.54 | P 1 | | 117 009 | +0.71 | UTE | LTE | LTE | 98 | 510 |
| Bobbin | 67 | 54 | NQI | | 0.45 | P 1 | | 120 UTS | +19.20 | LTE | UTE | UTE | 8 | 510 |
| Bobbin | 67 | 56 | NQI | | 0.46 | P 1 | | 110 UTS | +15.90 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 67 | 68 | NQI | | 0.47 | 3 | | 56 015 | +10.33 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 67 | 105 | NQI | | 0.21 | 3 | | 103 008 | +29.85 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | 67 | 114 | NQI | | 0.30 | 3 | | 83 LTS | +6.60 | UTE | LTE | LTE | 68 | 510 |
| Bobbin | 67 | 124 | NQI | | 0.48 | P 1 | | 74 007 | -0.36 | UTE | LTE | LTE | 68 | 510 |
| Bobbin | 68 | 2 | NQI | | 0.91 | P 1 | | 120 011 | +0.59 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | | | NQI | | 0.99 | P 1 | | 113 011 | -0.70 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | 68 | 5 | NQI | | 1.18 | P 1 | | 108 010 | +0.58 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | 68 | 6 | NQI | | 0.60 | P 1 | | 113 010 | +0.50 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | 68 | 11 | NQI | | 0.60 | P 1 | | 105 010 | -0.59 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | 68 | 12 | NQI | | 0.28 | P 1 | | 70 012 | +0.40 | UTE | LTE | LTE | 122 | 510 |
| Bobbin | 68 | 13 | NQI | | 0.48 | P 1 | | 117 011 | +0.56 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | | | NQI | | 0.72 | P 1 | | 121 010 | -0.68 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | 68 | 20 | NQI | | 1.01 | P 1 | | 123 008 | -0.69 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | 68 | 23 | NQI | | 0.58 | P 1 | | 139 010 | -0.71 | UTE | LTE | LTE | 122 | 510 |

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN

OCCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|----------|-----|-----|----------|---------|---------|-----|-------|-------|----------|
| Bobbin | 68 | 58 | NQI | | 0.35 P 1 | 61 | 005 | +1.02 | LTE | UTE | UTE | 3 | 510 | |
| Bobbin | 68 | 60 | NQI | | 0.30 3 | 110 | 009 | +11.81 | LTE | UTE | UTE | 3 | 510 | |
| Bobbin | | | NQI | | 0.36 3 | 103 | 008 | +30.58 | LTE | UTE | UTE | 3 | 510 | |
| Bobbin | | | NQI | | 0.43 3 | 76 | 005 | +35.07 | LTE | UTE | UTE | 3 | 510 | |
| Bobbin | 68 | 65 | NQI | | 0.47 3 | 111 | 002 | +25.66 | LTE | UTE | UTE | 3 | 510 | |
| Bobbin | 68 | 66 | NQI | | 0.56 P 1 | 96 | 004 | +0.70 | LTE | UTE | UTE | 3 | 510 | |
| Bobbin | 68 | 81 | NQI | | 0.31 3 | 95 | 011 | +30.90 | UTE | LTE | LTE | 57 | 510 | |
| Bobbin | 68 | 85 | NQI | | 0.28 3 | 83 | 015 | +19.52 | UTE | LTE | LTE | 57 | 510 | |
| Bobbin | 68 | 110 | NQI | | 0.54 3 | 120 | 006 | +11.19 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | 68 | 122 | NQI | | 0.33 3 | 131 | 013 | +2.75 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | 68 | 124 | NQI | | 0.34 3 | 97 | 009 | +12.62 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | 68 | 127 | NQI | | 0.62 P 1 | 87 | 008 | +0.71 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | | | NQI | | 0.71 P 1 | 97 | 008 | +0.09 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | 68 | 129 | NQI | | 0.74 P 1 | 88 | 007 | +0.64 | UTE | LTE | LTE | 82 | 510 | |
| Bobbin | 68 | 130 | NQI | | 0.48 3 | 104 | 012 | +1.27 | UTE | LTE | LTE | 81 | 510 | |
| Bobbin | | | NQI | | 0.82 P 1 | 99 | 011 | -0.35 | UTE | LTE | LTE | 81 | 510 | |
| Bobbin | 69 | 4 | NQI | | 0.54 3 | 137 | 010 | +6.30 | 014 | LTE | LTE | 145 | 510 | |
| Bobbin | 69 | 6 | NQI | | 0.60 3 | 114 | 010 | +34.00 | 014 | LTE | LTE | 145 | 510 | |
| Bobbin | 69 | 9 | NQI | | 0.27 P 1 | 92 | 012 | +0.54 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | 69 | 12 | NQI | | 0.33 P 1 | 76 | 010 | +0.57 | UTE | LTE | LTE | 122 | 510 | |
| Bobbin | 69 | 15 | NQI | | 0.59 P 1 | 86 | 008 | -0.65 | UTE | LTE | LTE | 121 | 510 | |
| Bobbin | | | ODI | 30 | 0.55 P 1 | 93 | 015 | +1.44 | UTE | LTE | LTE | 121 | 510 | |
| Bobbin | 69 | 17 | NQI | | 0.50 3 | 108 | 010 | +10.18 | UTE | LTE | LTE | 121 | 510 | |
| Bobbin | 69 | 23 | NQI | | 0.28 3 | 104 | 001 | +16.61 | UTE | LTE | LTE | 121 | 510 | |
| Bobbin | | | NQI | | 0.32 P 1 | 114 | 011 | +0.41 | UTE | LTE | LTE | 121 | 510 | |
| Bobbin | 69 | 41 | NQI | | 0.46 P 1 | 73 | 008 | +0.70 | UTE | LTE | LTE | 97 | 510 | |
| Bobbin | 69 | 43 | NQI | | 0.35 P 1 | 91 | 006 | +0.66 | UTE | LTE | LTE | 97 | 510 | |
| Bobbin | 69 | 44 | NQI | | 0.42 P 1 | 80 | 006 | +0.64 | UTE | LTE | LTE | 98 | 510 | |
| Bobbin | | | NQI | | 0.78 P 1 | 87 | 009 | -0.82 | UTE | LTE | LTE | 98 | 510 | |
| Bobbin | 69 | 46 | NQI | | 0.50 P 1 | 77 | 006 | +0.69 | UTE | LTE | LTE | 98 | 510 | |
| Bobbin | 69 | 55 | NQI | | 0.27 3 | 89 | 002 | +12.98 | LTE | UTE | UTE | 3 | 510 | |
| Bobbin | 69 | 61 | NQI | | 0.32 3 | 92 | LTS | +40.98 | LTE | UTE | UTE | 3 | 510 | |
| Bobbin | 69 | 72 | NQI | | 0.32 P 1 | 90 | 010 | +0.49 | LTE | UTE | UTE | 3 | 510 | |
| Bobbin | 69 | 75 | NQI | | 0.37 3 | 58 | 003 | +3.99 | LTE | UTE | UTE | 3 | 510 | |
| Bobbin | 69 | 78 | NQI | | 0.27 3 | 114 | 010 | +14.76 | UTE | LTE | LTE | 56 | 510 | |
| Bobbin | 69 | 98 | NQI | | 0.31 3 | 82 | 011 | +23.55 | UTE | LTE | LTE | 56 | 510 | |
| Bobbin | | | NQI | | 0.35 3 | 95 | 011 | +24.96 | UTE | LTE | LTE | 56 | 510 | |
| Bobbin | | | NQI | | 0.40 3 | 127 | 011 | +24.64 | UTE | LTE | LTE | 56 | 510 | |
| Bobbin | | | NQI | | 0.80 3 | 108 | 011 | +25.59 | UTE | LTE | LTE | 56 | 510 | |
| Bobbin | 69 | 118 | NQI | | 0.34 3 | 73 | 015 | +2.83 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | 69 | 130 | ODI | 40 | 2.29 P 1 | 88 | 012 | +0.73 | UTE | LTE | LTE | 81 | 510 | |
| Bobbin | 69 | 132 | NQI | | 0.90 3 | 118 | 015 | +22.37 | UTE | LTE | LTE | 81 | 510 | |
| Bobbin | 70 | 1 | NQI | | 0.46 3 | 101 | 014 | +14.32 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | 70 | 3 | NQI | | 0.28 P 1 | 124 | 011 | +0.37 | 014 | LTE | LTE | 145 | 510 | |
| Bobbin | | | NQI | | 1.00 P 1 | 103 | 011 | -0.26 | 014 | LTE | LTE | 145 | 510 | |
| Bobbin | 70 | 7 | NQI | | 0.49 3 | 106 | 011 | +4.10 | 014 | LTE | LTE | 145 | 510 | |
| Bobbin | | | NQI | | 0.53 P 1 | 100 | 010 | +0.40 | 014 | LTE | LTE | 145 | 510 | |
| Bobbin | 70 | 8 | NQI | | 0.46 3 | 116 | 011 | +8.23 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | | | NQI | | 0.76 P 1 | 137 | 011 | +0.78 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | 70 | 9 | NQI | | 0.80 3 | 120 | 011 | +7.45 | 014 | LTE | LTE | 145 | 510 | |
| Bobbin | | | NQI | | 0.56 P 1 | 116 | 010 | +0.46 | 014 | LTE | LTE | 145 | 510 | |
| Bobbin | 70 | 10 | NQI | | 0.49 3 | 65 | 011 | +7.10 | UTE | LTE | LTE | 121 | 510 | |
| Bobbin | | | NQI | | 0.31 P 1 | 100 | 013 | -0.78 | UTE | LTE | LTE | 121 | 510 | |
| Bobbin | | | NQI | | 0.39 P 1 | 90 | 009 | +0.61 | UTE | LTE | LTE | 121 | 510 | |
| Bobbin | 70 | 11 | NQI | | 0.57 3 | 102 | 012 | -1.55 | UTE | LTE | LTE | 122 | 510 | |
| Bobbin | | | NQI | | 0.69 3 | 114 | 011 | +34.18 | UTE | LTE | LTE | 122 | 510 | |
| Bobbin | 70 | 12 | NQI | | 1.35 P 1 | 95 | 013 | -0.80 | UTE | LTE | LTE | 121 | 510 | |
| Bobbin | 70 | 13 | NQI | | 0.40 P 1 | 95 | 011 | +0.51 | UTE | LTE | LTE | 122 | 510 | |
| Bobbin | | | NQI | | 0.57 P 1 | 105 | 012 | -1.20 | UTE | LTE | LTE | 122 | 510 | |
| Bobbin | 70 | 16 | NQI | | 0.41 P 1 | 103 | 011 | +0.43 | UTE | LTE | LTE | 121 | 510 | |
| Bobbin | 70 | 22 | NQI | | 0.65 P 1 | 107 | 011 | +0.41 | UTE | LTE | LTE | 121 | 510 | |
| Bobbin | 70 | 24 | NQI | | 0.29 P 1 | 86 | 012 | -0.09 | UTE | LTE | LTE | 121 | 510 | |
| Bobbin | | | NQI | | 0.47 P 1 | 102 | 003 | -0.61 | UTE | LTE | LTE | 121 | 510 | |
| Bobbin | 70 | 30 | NQI | | 0.30 P 1 | 107 | 011 | +0.43 | UTE | LTE | LTE | 121 | 510 | |
| Bobbin | 70 | 32 | NQI | | 0.42 3 | 77 | 013 | +18.28 | UTE | LTE | LTE | 121 | 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
Oconee Nuclear Station - Unit Three
S/G A
04/00 RFO
Bobbin,Sleeve Bobbin

Page 16 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|------|-----|----------|---------|---------|-----|-------|-------|----------|
| Bobbin | | | | | NQI | 0.69 | 3 | 87 010 | +4.21 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | 70 | 40 | | | NQI | 0.28 | P 1 | 65 012 | +0.37 | UTE | LTE | LTE | 91 | 510 |
| Bobbin | | | | | NQI | 0.45 | P 1 | 98 009 | -0.66 | UTE | LTE | LTE | 91 | 510 |
| Bobbin | 70 | 43 | | | NQI | 0.42 | P 1 | 84 008 | +0.57 | UTE | LTE | LTE | 94 | 510 |
| Bobbin | | | | | NQI | 0.94 | P 1 | 84 009 | -0.75 | UTE | LTE | LTE | 94 | 510 |
| Bobbin | 70 | 45 | | | NQI | 1.11 | P 1 | 85 009 | -0.80 | UTE | LTE | LTE | 94 | 510 |
| Bobbin | 70 | 46 | | | NQI | 0.54 | P 1 | 109 008 | -0.76 | UTE | LTE | LTE | 91 | 510 |
| Bobbin | | | | | NQI | 0.79 | P 1 | 78 009 | -0.66 | UTE | LTE | LTE | 91 | 510 |
| Bobbin | | | | | NQI | 1.17 | P 1 | 81 009 | +0.62 | UTE | LTE | LTE | 91 | 510 |
| Bobbin | 70 | 52 | | | NQI | 0.43 | P 1 | 103 005 | +0.63 | UTE | LTE | LTE | 91 | 510 |
| Bobbin | 70 | 53 | | | NQI | 0.42 | P 1 | 79 005 | +0.59 | LTE | UTE | UTE | 8 | 510 |
| Bobbin | 70 | 55 | | | NQI | 0.32 | 3 | 79 013 | +8.48 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | | | | | NQI | 0.34 | 3 | 96 013 | +9.56 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 70 | 66 | | | NQI | 0.35 | 3 | 51 003 | +26.44 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | | | | | NQI | 0.66 | P 1 | 56 005 | +0.70 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 70 | 74 | | | NQI | 0.30 | 3 | 88 007 | +38.13 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | | | | | NQI | 0.63 | 3 | 96 007 | +37.83 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 70 | 90 | | | NQI | 0.40 | 3 | 86 LTS | +24.95 | UTE | LTE | LTE | 56 | 510 |
| Bobbin | 70 | 103 | | | NQI | 0.29 | 3 | 106 010 | +15.30 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | 70 | 119 | | | NQI | 0.32 | 3 | 84 008 | +30.47 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | 70 | 124 | | | NQI | 0.74 | 3 | 70 002 | +34.44 | UTE | LTE | LTE | 68 | 510 |
| Bobbin | | | | | NQI | 0.92 | 3 | 83 002 | +9.79 | UTE | LTE | LTE | 68 | 510 |
| Bobbin | 70 | 128 | | | NQI | 0.74 | P 1 | 107 008 | -0.57 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | 70 | 130 | | | NQI | 0.34 | 3 | 97 015 | +1.76 | UTE | LTE | LTE | 81 | 510 |
| Bobbin | 71 | 3 | | | NQI | 0.26 | P 1 | 105 010 | -0.31 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | | | | | NQI | 0.40 | P 1 | 103 013 | -0.51 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | 71 | 9 | | | NQI | 0.25 | P 1 | 103 011 | +0.42 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | | | | | NQI | 0.53 | P 1 | 90 011 | +0.68 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | 71 | 12 | | | NQI | 0.33 | P 1 | 87 010 | +0.24 | UTE | LTE | LTE | 122 | 510 |
| Bobbin | | | | | NQI | 0.72 | P 1 | 100 014 | -0.71 | UTE | LTE | LTE | 122 | 510 |
| Bobbin | 71 | 13 | | | NQI | 0.58 | P 1 | 75 010 | +0.41 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | | | | | NQI | 0.75 | P 1 | 101 014 | -0.74 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | 71 | 14 | | | NQI | 0.45 | 3 | 100 015 | +28.32 | UTE | LTE | LTE | 122 | 510 |
| Bobbin | | | | | NQI | 1.01 | P 1 | 104 015 | -0.76 | UTE | LTE | LTE | 122 | 510 |
| Bobbin | 71 | 15 | | | NQI | 0.47 | 3 | 95 015 | +28.85 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | | | | | NQI | 0.74 | P 1 | 104 014 | -0.74 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | 71 | 17 | | | NQI | 0.49 | P 1 | 96 015 | -0.79 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | | | | | NQI | 0.59 | P 1 | 125 010 | -0.70 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | 71 | 18 | | | NQI | 0.33 | 3 | 119 012 | +3.22 | UTE | LTE | LTE | 122 | 510 |
| Bobbin | | | | | NQI | 0.35 | P 1 | 82 008 | +0.68 | UTE | LTE | LTE | 122 | 510 |
| Bobbin | 71 | 19 | | | NQI | 0.85 | P 1 | 116 012 | -1.13 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | 71 | 21 | | | NQI | 1.11 | 3 | 114 012 | +2.49 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | | | | | NQI | 0.54 | P 1 | 123 010 | +0.41 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | 71 | 22 | | | NQI | 0.37 | P 1 | 112 010 | -0.56 | UTE | LTE | LTE | 122 | 510 |
| Bobbin | 71 | 23 | | | NQI | 0.68 | P 1 | 123 011 | +0.54 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | 71 | 27 | | | NQI | 0.40 | P 1 | 105 013 | +0.61 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | 71 | 28 | | | NQI | 0.43 | P 1 | 91 013 | +0.71 | UTE | LTE | LTE | 122 | 510 |
| Bobbin | | | | | NQI | 0.57 | P 1 | 112 012 | +0.51 | UTE | LTE | LTE | 122 | 510 |
| Bobbin | 71 | 29 | | | NQI | 0.27 | P 1 | 94 013 | +0.63 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | 71 | 30 | | | NQI | 0.49 | P 1 | 112 012 | +0.42 | UTE | LTE | LTE | 122 | 510 |
| Bobbin | 71 | 33 | | | NQI | 0.55 | P 1 | 99 012 | +0.54 | UTE | LTE | LTE | 121 | 510 |
| Bobbin | 71 | 36 | | | NQI | 0.45 | P 1 | 140 011 | +0.50 | UTE | LTE | LTE | 94 | 510 |
| Bobbin | 71 | 40 | | | NQI | 0.34 | P 1 | 93 009 | +0.44 | UTE | LTE | LTE | 94 | 510 |
| Bobbin | 71 | 44 | | | NQI | 0.66 | P 1 | 127 009 | -0.82 | UTE | LTE | LTE | 94 | 510 |
| Bobbin | 71 | 45 | | | NQI | 0.80 | P 1 | 89 008 | +0.66 | UTE | LTE | LTE | 91 | 510 |
| Bobbin | 71 | 46 | | | NQI | 0.31 | P 1 | 73 006 | +0.64 | UTE | LTE | LTE | 94 | 510 |
| Bobbin | | | | | NQI | 0.85 | P 1 | 127 008 | -0.68 | UTE | LTE | LTE | 94 | 510 |
| Bobbin | | | | | NQI | 1.27 | P 1 | 103 007 | -0.71 | UTE | LTE | LTE | 94 | 510 |
| Bobbin | 71 | 48 | | | NQI | 1.20 | P 1 | 75 009 | -0.77 | UTE | LTE | LTE | 94 | 510 |
| Bobbin | 71 | 54 | | | NQI | 0.61 | P 1 | 94 005 | +0.66 | LTE | UTE | UTE | 12 | 510 |
| Bobbin | 71 | 59 | | | NQI | 0.44 | 3 | 74 LTS | +12.61 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 71 | 60 | | | NQI | 0.40 | 3 | 102 001 | +17.27 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | | | | | NQI | 0.82 | 3 | 81 001 | +33.95 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 71 | 71 | | | NQI | 0.42 | 3 | 115 010 | +24.11 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 71 | 101 | | | NQI | 0.53 | 3 | 124 010 | +31.63 | UTE | LTE | LTE | 69 | 510 |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 17 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-------|-------|-----|-----|-----------------|---------|---------|-----|-------|-------|----------|
| Bobbin | 71 | 105 | NQI | 0.33 | 3 | 83 | 010 | +25.97 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | 71 | 119 | NQI | 0.30 | 3 | 85 | 001 | +8.71 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | 71 | 124 | NQI | 0.37 | 3 | 83 | 013 | +32.45 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | 71 | 128 | NQI | 0.42 | 3 | 113 | 010 | +17.77 | UTE | LTE | LTE | 81 | 510 | |
| Bobbin | 72 | 1 | NQI | 0.33 | P 1 | 124 | 014 | +0.32 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | 72 | 13 | NQI | 0.23 | P 1 | 117 | 014 | +0.33 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | | | NQI | 0.29 | P 1 | 109 | 014 | -0.34 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | 72 | 22 | NQI | 0.33 | P 1 | 108 | 015 | +0.59 | UTE | LTE | LTE | 122 | 510 | |
| Bobbin | 72 | 23 | NQI | 1.06 | 3 | 105 | 015 | +22.76 | UTE | LTE | LTE | 122 | 510 | |
| Bobbin | | | NQI | 0.24 | P 1 | 106 | 014 | +0.29 | UTE | LTE | LTE | 122 | 510 | |
| Bobbin | | | NQI | 0.46 | P 1 | 109 | 015 | +0.53 | UTE | LTE | LTE | 122 | 510 | |
| Bobbin | 72 | 24 | NQI | 0.47 | P 1 | 117 | 015 | +0.57 | UTE | LTE | LTE | 121 | 510 | |
| Bobbin | 72 | 25 | NQI | 0.32 | P 1 | 120 | 015 | +0.50 | UTE | LTE | LTE | 117 | 510 | |
| Bobbin | | | NQI | 1.07 | P 1 | 106 | 013 | +0.63 | UTE | LTE | LTE | 117 | 510 | |
| Bobbin | 72 | 27 | NQI | 0.42 | P 1 | 124 | 010 | +0.55 | UTE | LTE | LTE | 117 | 510 | |
| Bobbin | 72 | 28 | NQI | 0.54 | 3 | 97 | 012 | +8.48 | UTE | LTE | LTE | 117 | 510 | |
| Bobbin | 72 | 31 | NQI | 0.54 | P 1 | 92 | 012 | +0.24 | UTE | LTE | LTE | 117 | 510 | |
| Bobbin | 72 | 32 | NQI | 0.36 | P 1 | 84 | 010 | +0.35 | UTE | LTE | LTE | 117 | 510 | |
| Bobbin | 72 | 34 | NQI | 0.29 | P 1 | 104 | 015 | -0.42 | UTE | LTE | LTE | 117 | 510 | |
| Bobbin | 72 | 35 | NQI | 0.32 | P 1 | 94 | 005 | -0.77 | UTE | LTE | LTE | 94 | 510 | |
| Bobbin | | | NQI | 0.56 | P 1 | 107 | 015 | -0.57 | UTE | LTE | LTE | 94 | 510 | |
| Bobbin | 72 | 39 | NQI | 0.51 | P 1 | 126 | 013 | +0.51 | UTE | LTE | LTE | 91 | 510 | |
| Bobbin | | | NQI | 0.55 | P 1 | 132 | 012 | +0.53 | UTE | LTE | LTE | 91 | 510 | |
| Bobbin | 72 | 44 | NQI | 0.52 | P 1 | 95 | 009 | -0.77 | UTE | LTE | LTE | 94 | 510 | |
| Bobbin | 72 | 53 | NQI | 0.30 | P 1 | 127 | 005 | -0.76 | LTE | UTE | UTE | 12 | 510 | |
| Bobbin | | | NQI | 0.41 | P 1 | 130 | 007 | -0.65 | LTE | UTE | UTE | 12 | 510 | |
| Bobbin | 72 | 57 | NQI | 0.47 | 3 | 68 | 010 | +10.54 | LTE | UTE | UTE | 1 | 510 | |
| Bobbin | 72 | 58 | NQI | 0.28 | 3 | 100 | 012 | +15.10 | LTE | UTE | UTE | 1 | 510 | |
| Bobbin | 72 | 62 | NQI | 0.55 | P 1 | 44 | 005 | -0.75 | LTE | UTE | UTE | 1 | 510 | |
| Bobbin | 72 | 64 | NQI | 0.26 | P 1 | 91 | 003 | -0.40 | LTE | UTE | UTE | 1 | 510 | |
| Bobbin | 72 | 72 | NQI | 0.20 | 3 | 73 | 009 | +3.23 | LTE | UTE | UTE | 3 | 510 | |
| Bobbin | | | NQI | 0.27 | 3 | 81 | 009 | +24.30 | LTE | UTE | UTE | 3 | 510 | |
| Bobbin | | | NQI | 0.28 | 3 | 80 | 009 | +9.80 | LTE | UTE | UTE | 3 | 510 | |
| Bobbin | | | NQI | 0.30 | 3 | 55 | 009 | +6.12 | LTE | UTE | UTE | 3 | 510 | |
| Bobbin | | | NQI | 0.34 | 3 | 78 | 007 | +37.78 | LTE | UTE | UTE | 3 | 510 | |
| Bobbin | | | NQI | 0.35 | 3 | 90 | 009 | +1.31 | LTE | UTE | UTE | 3 | 510 | |
| Bobbin | | | NQI | 0.36 | 3 | 78 | 009 | +12.07 | LTE | UTE | UTE | 3 | 510 | |
| Bobbin | | | NQI | 0.39 | 3 | 78 | 007 | +28.32 | LTE | UTE | UTE | 3 | 510 | |
| Bobbin | | | NQI | 0.42 | 3 | 42 | 008 | +29.83 | LTE | UTE | UTE | 3 | 510 | |
| Bobbin | | | NQI | 0.42 | 3 | 44 | 008 | +29.79 | LTE | UTE | UTE | 3 | 510 | |
| Bobbin | | | NQI | 0.46 | 3 | 79 | 008 | +16.03 | LTE | UTE | UTE | 3 | 510 | |
| Bobbin | | | NQI | 0.49 | 3 | 39 | 008 | +32.09 | LTE | UTE | UTE | 3 | 510 | |
| Bobbin | | | NQI | 0.56 | 3 | 69 | 008 | +18.02 | LTE | UTE | UTE | 3 | 510 | |
| Bobbin | | | NQI | 0.57 | 3 | 78 | 008 | +35.67 | LTE | UTE | UTE | 3 | 510 | |
| Bobbin | 72 | 79 | NQI | 0.60 | 3 | 76 | 014 | +29.63 | UTE | LTE | LTE | 56 | 510 | |
| Bobbin | 72 | 84 | NQI | 0.39 | 3 | 100 | 006 | +21.09 | UTE | LTE | LTE | 57 | 510 | |
| Bobbin | 72 | 98 | NQI | 0.50 | 3 | 104 | 012 | +19.54 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | | | NQI | 0.57 | 3 | 105 | 012 | +9.58 to +12.77 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | 72 | 123 | NQI | 0.52 | P 1 | 96 | 014 | +0.87 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | 72 | 127 | NQI | 0.52 | P 1 | 133 | 008 | -0.75 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | | | NQI | 0.63 | P 1 | 102 | 007 | -0.10 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | 72 | 128 | NQI | 1.15 | P 1 | 98 | 008 | -0.68 | UTE | LTE | LTE | 81 | 510 | |
| Bobbin | 73 | 3 | NQI | 0.56 | 3 | 142 | 014 | +17.22 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | 73 | 4 | NQI | 0.97 | P 1 | 90 | 013 | -0.44 | 014 | LTE | LTE | 145 | 510 | |
| Bobbin | 73 | 5 | NQI | 1.30 | P 1 | 104 | 014 | -0.84 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | 73 | 13 | NQI | 0.38 | 3 | 107 | LTS | +18.06 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | 73 | 16 | NQI | 0.16 | P 1 | 95 | 009 | +0.38 | 014 | LTE | LTE | 145 | 510 | |
| Bobbin | 73 | 21 | NQI | 0.22 | P 1 | 86 | 014 | +0.15 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | 73 | 46 | NQI | 0.46 | P 1 | 128 | 010 | +0.52 | UTE | LTE | LTE | 94 | 510 | |
| Bobbin | 73 | 48 | NQI | 0.39 | P 1 | 34 | 009 | +0.53 | UTE | LTE | LTE | 94 | 510 | |
| Bobbin | 73 | 54 | NQI | 0.17 | P 1 | 86 | 007 | +0.39 | LTE | UTE | UTE | 5 | 510 | |
| Bobbin | 73 | 57 | NQI | 0.54 | 3 | 60 | 008 | +6.84 | LTE | UTE | UTE | 5 | 510 | |
| Bobbin | 73 | 66 | NQI | 10.12 | P 1 | 14 | LTE | +4.31 | LTE | UTE | UTE | 1 | 510 | |
| Bobbin | 73 | 67 | NQI | 0.54 | P 1 | 46 | 006 | -0.70 | LTE | UTE | UTE | 1 | 510 | |
| Bobbin | 73 | 68 | NQI | 0.53 | P 1 | 49 | 005 | -0.67 | LTE | UTE | UTE | 1 | 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 18 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|-----|-----|----------|------------------|---------|-----|-------|-------|----------|
| Bobbin | 73 | 79 | NQI | | 0.40 | 3 | 77 | 006 | +23.13 | UTE | LTE | LTE | 57 | 510 |
| Bobbin | | | NQI | | 0.46 | 3 | 62 | 015 | +6.37 | UTE | LTE | LTE | 57 | 510 |
| Bobbin | 73 | 98 | NQI | | 0.81 | 3 | 102 | LTS | +38.89 | UTE | LTE | LTE | 68 | 510 |
| Bobbin | 73 | 102 | NQI | | 0.29 | 3 | 78 | 014 | +19.41 | UTE | LTE | LTE | 68 | 510 |
| Bobbin | | | NQI | | 0.45 | 3 | 95 | 013 | +20.30 | UTE | LTE | LTE | 68 | 510 |
| Bobbin | 73 | 108 | NQI | | 0.38 | P 1 | 122 | 007 | -0.31 | UTE | LTE | LTE | 68 | 510 |
| Bobbin | 73 | 129 | NQI | | 0.44 | P 1 | 91 | 003 | -0.77 | UTE | LTE | LTE | 81 | 510 |
| Bobbin | 74 | 11 | NQI | | 0.31 | 3 | 92 | 007 | +24.79 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | 74 | 19 | NQI | | 0.26 | P 1 | 117 | 009 | -0.28 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | 74 | 48 | NQI | | 0.50 | 3 | 95 | 001 | +16.68 | UTE | LTE | LTE | 94 | 510 |
| Bobbin | 74 | 54 | NQI | | 2.65 | 3 | 112 | LTS | +21.81 to +37.92 | LTE | UTE | UTE | 5 | 510 |
| Bobbin | 74 | 56 | NQI | | 0.62 | 3 | 50 | 015 | +26.36 to +31.49 | LTE | UTE | UTE | 5 | 510 |
| Bobbin | 74 | 65 | NQI | | 0.63 | P 1 | 46 | 007 | -0.72 | LTE | UTE | UTE | 1 | 510 |
| Bobbin | 74 | 66 | NQI | | 0.29 | 3 | 79 | UTS | -0.51 | LTE | UTE | UTE | 1 | 510 |
| Bobbin | | | NQI | | 0.34 | 3 | 107 | 015 | +26.20 | LTE | UTE | UTE | 1 | 510 |
| Bobbin | 74 | 93 | NQI | | 0.33 | 3 | 91 | 009 | +10.74 | UTE | LTE | LTE | 65 | 510 |
| Bobbin | | | NQI | | 0.56 | 3 | 104 | 009 | +22.87 | UTE | LTE | LTE | 65 | 510 |
| Bobbin | | | NQI | | 0.72 | 3 | 104 | 009 | +19.43 | UTE | LTE | LTE | 65 | 510 |
| Bobbin | 74 | 95 | NQI | | 0.28 | 3 | 73 | 011 | +9.61 | UTE | LTE | LTE | 65 | 510 |
| Bobbin | | | NQI | | 0.36 | 3 | 85 | 011 | +8.39 | UTE | LTE | LTE | 65 | 510 |
| Bobbin | 74 | 108 | NQI | | 0.72 | 3 | 57 | 013 | +7.40 | UTE | LTE | LTE | 68 | 510 |
| Bobbin | 74 | 112 | NQI | | 0.44 | 3 | 64 | 011 | +29.64 | UTE | LTE | LTE | 68 | 510 |
| Bobbin | 74 | 121 | NQI | | 0.33 | 3 | 92 | 001 | +25.73 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | 74 | 122 | NQI | | 0.34 | P 1 | 76 | 008 | -0.16 | UTE | LTE | LTE | 82 | 510 |
| Bobbin | 74 | 124 | NQI | | 0.94 | 3 | 67 | 008 | +32.36 | UTE | LTE | LTE | 82 | 510 |
| Bobbin | 74 | 125 | NQI | | 1.15 | 3 | 128 | 015 | +10.75 | UTE | LTE | LTE | 81 | 510 |
| Bobbin | | | NQI | | 0.46 | P 1 | 110 | 010 | +0.15 | UTE | LTE | LTE | 81 | 510 |
| Bobbin | 75 | 7 | NQI | | 0.22 | 3 | 96 | 008 | +19.20 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | 75 | 51 | NQI | | 0.50 | P 1 | 72 | 012 | -1.07 | UTE | LTE | LTE | 91 | 510 |
| Bobbin | 75 | 112 | NQI | | 0.25 | 3 | 102 | 010 | +2.19 | UTE | LTE | LTE | 64 | 510 |
| Bobbin | 75 | 114 | NQI | | 0.23 | 3 | 93 | 002 | +17.29 | UTE | LTE | LTE | 64 | 510 |
| Bobbin | | | NQI | | 0.25 | 3 | 87 | 015 | +33.13 | UTE | LTE | LTE | 64 | 510 |
| Bobbin | 75 | 119 | ODI | 4 | 0.74 | P 1 | 98 | 014 | +0.95 | UTE | LTE | LTE | 64 | 510 |
| Bobbin | 75 | 123 | NQI | | 0.57 | P 1 | 115 | 009 | -0.76 | UTE | LTE | LTE | 76 | 510 |
| Bobbin | 75 | 126 | NQI | | 0.94 | 3 | 113 | 015 | +22.24 | UTE | LTE | LTE | 81 | 510 |
| Bobbin | | | NQI | | 0.40 | P 1 | 97 | 013 | +0.99 | UTE | LTE | LTE | 81 | 510 |
| Bobbin | 76 | 66 | NQI | | 0.59 | P 1 | 78 | 015 | +0.81 | LTE | UTE | UTE | 1 | 510 |
| Bobbin | 76 | 87 | NQI | | 0.29 | 3 | 95 | LTS | +39.80 | UTE | LTE | LTE | 60 | 510 |
| Bobbin | 76 | 88 | NQI | | 0.41 | 3 | 101 | 002 | +4.69 | UTE | LTE | LTE | 91 | 510 |
| Bobbin | 76 | 114 | NQI | | 0.53 | P 1 | 91 | LTS | -0.33 | UTE | LTE | LTE | 109 | 510 |
| Bobbin | 76 | 123 | NQI | | 0.30 | 3 | 72 | 015 | +9.47 | UTE | LTE | LTE | 76 | 510 |
| Bobbin | | | NQI | | 0.33 | 3 | 99 | 015 | +9.87 | UTE | LTE | LTE | 76 | 510 |
| Bobbin | | | NQI | | 0.80 | P 1 | 95 | 010 | +0.42 | UTE | LTE | LTE | 76 | 510 |
| Bobbin | 77 | 2 | NQI | | 0.45 | 3 | 93 | LTS | +26.22 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | 77 | 7 | NQI | | 0.27 | 3 | 98 | LTS | +26.15 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | | | NQI | | 0.44 | 3 | 101 | LTS | +26.46 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | 77 | 69 | NQI | | 0.28 | 3 | 106 | 010 | +32.09 | LTE | UTE | UTE | 7 | 510 |
| Bobbin | 77 | 87 | NQI | | 0.29 | 3 | 96 | 014 | +5.82 | UTE | LTE | LTE | 158 | 510 |
| Bobbin | 77 | 101 | NQI | | 0.40 | 3 | 96 | 012 | +8.31 | UTE | LTE | LTE | 148 | 510 |
| Bobbin | 77 | 115 | NQI | | 0.24 | P 1 | 97 | 014 | +1.26 | UTE | LTE | LTE | 148 | 510 |
| Bobbin | 77 | 117 | NQI | | 0.45 | 3 | 99 | 015 | +33.39 | UTE | LTE | LTE | 148 | 510 |
| Bobbin | 77 | 119 | ODI | 14 | 1.01 | P 1 | 100 | 014 | +0.97 | UTE | LTE | LTE | 147 | 510 |
| Bobbin | 77 | 125 | NQI | | 1.24 | P 1 | 115 | 009 | -0.03 | UTE | LTE | LTE | 159 | 510 |
| Bobbin | 78 | 11 | NQI | | 0.39 | 3 | 90 | 005 | +32.65 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | 78 | 15 | NQI | | 0.30 | 3 | 106 | LTS | +23.31 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | 78 | 34 | NQI | | 0.41 | 3 | 85 | 014 | +18.72 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | 78 | 59 | NQI | | 0.58 | 3 | 72 | 007 | +14.81 | LTE | UTE | UTE | 10 | 510 |
| Bobbin | 78 | 60 | NQI | | 0.42 | 3 | 86 | 008 | +29.96 | LTE | UTE | UTE | 11 | 510 |
| Bobbin | 78 | 101 | ODI | 25 | 1.37 | P 1 | 96 | 014 | +1.20 | UTE | LTE | LTE | 147 | 510 |
| Bobbin | 78 | 102 | NQI | | 0.23 | P 1 | 67 | 014 | +1.08 | UTE | LTE | LTE | 148 | 510 |
| Bobbin | 78 | 105 | NQI | | 0.31 | 3 | 101 | 014 | +4.18 | UTE | LTE | LTE | 147 | 510 |
| Bobbin | 78 | 116 | NQI | | 0.19 | 3 | 108 | 014 | +2.15 | UTE | LTE | LTE | 147 | 510 |
| Bobbin | | | ODI | 25 | 0.42 | P 1 | 96 | 014 | +1.37 | UTE | LTE | LTE | 147 | 510 |
| Bobbin | 78 | 120 | NQI | | 0.64 | P 1 | 126 | 014 | +0.96 | UTE | LTE | LTE | 148 | 510 |
| Bobbin | 78 | 121 | NQI | | 0.70 | P 1 | 107 | 014 | +0.69 | UTE | LTE | LTE | 147 | 510 |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 19 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | *TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|-----|-----|----------|------------------|---------|-----|-------|-------|----------|
| Bobbin | 78 | 122 | NQI | | 0.35 | 3 | | 76 014 | +25.95 | UTE | LTE | LTE | 148 | 510 |
| Bobbin | 78 | 125 | NQI | | 0.18 | P 1 | | 99 008 | -0.52 | UTE | LTE | LTE | 159 | 510 |
| Bobbin | 78 | 126 | NQI | | 0.56 | P 1 | | 107 008 | -0.55 | UTE | LTE | LTE | 159 | 510 |
| Bobbin | | | ODI | 36 | 0.49 | P 1 | | 88 014 | +1.19 | UTE | LTE | LTE | 159 | 510 |
| Bobbin | | | ODI | 55 | 0.53 | P 1 | | 79 014 | +0.98 | UTE | LTE | LTE | 159 | 510 |
| Bobbin | 79 | 4 | NQI | | 0.24 | P 1 | | 108 014 | +0.68 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | | | NQI | | 0.51 | P 1 | | 123 010 | -0.58 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | | | NQI | | 0.65 | P 1 | | 119 012 | -0.75 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | | | NQI | | 0.78 | P 1 | | 97 014 | -0.73 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | 79 | 6 | NQI | | 0.87 | P 1 | | 104 012 | -0.53 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | | | NQI | | 1.87 | P 1 | | 110 013 | -0.78 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | | | NQI | | 1.92 | P 1 | | 100 014 | -0.71 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | 79 | 8 | NQI | | 0.70 | 3 | | 10 LTS | +12.50 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | 79 | 13 | NQI | | 0.29 | P 1 | | 85 013 | +0.23 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | 79 | 38 | NQI | | 0.43 | 3 | | 87 006 | +11.93 | UTE | LTE | LTE | 107 | 510 |
| Bobbin | 79 | 40 | NQI | | 0.56 | 3 | | 82 015 | +14.49 | UTE | LTE | LTE | 107 | 510 |
| Bobbin | 79 | 49 | NQI | | 0.80 | P 1 | | 96 009 | -0.67 | UTE | LTE | LTE | 108 | 510 |
| Bobbin | 79 | 50 | NQI | | 0.36 | 3 | | 80 011 | +16.71 | UTE | LTE | LTE | 107 | 510 |
| Bobbin | 79 | 60 | NQI | | 0.23 | 3 | | 87 015 | +7.95 | LTE | UTE | UTE | 11 | 510 |
| Bobbin | 79 | 62 | NQI | | 0.38 | P 1 | | 110 015 | -0.93 | LTE | UTE | UTE | 11 | 510 |
| Bobbin | 79 | 63 | NQI | | 0.33 | 3 | | 54 014 | +32.89 | LTE | UTE | UTE | 10 | 510 |
| Bobbin | 79 | 64 | NQI | | 0.49 | 3 | | 99 014 | +33.21 | LTE | UTE | UTE | 11 | 510 |
| Bobbin | 79 | 82 | NQI | | 0.32 | 3 | | 88 006 | +24.92 | UTE | LTE | LTE | 127 | 510 |
| Bobbin | 79 | 114 | NQI | | 0.89 | 3 | | 28 LTS | +32.45 | UTE | LTE | LTE | 148 | 510 |
| Bobbin | 79 | 117 | NQI | | 0.69 | 3 | | 79 006 | +27.67 | UTE | LTE | LTE | 147 | 510 |
| Bobbin | 79 | 118 | NQI | | 0.34 | P 1 | | 66 015 | +0.28 | UTE | LTE | LTE | 148 | 510 |
| Bobbin | 79 | 119 | NQI | | 0.27 | 3 | | 80 007 | +13.78 | UTE | LTE | LTE | 147 | 510 |
| Bobbin | | | NQI | | 0.34 | 3 | | 52 006 | +22.66 | UTE | LTE | LTE | 147 | 510 |
| Bobbin | 79 | 127 | NQI | | 0.83 | P 1 | | 99 014 | +0.67 | UTE | LTE | LTE | 157 | 510 |
| Bobbin | 80 | 1 | NQI | | 0.47 | 3 | | 84 013 | +18.16 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | | | NQI | | 0.51 | 3 | | 88 007 | +5.29 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | 80 | 2 | NQI | | 0.38 | 3 | | 5 011 | +20.28 to +28.98 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | 80 | 5 | NQI | | 2.22 | P 1 | | 97 012 | -0.70 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | 80 | 8 | NQI | | 0.41 | P 1 | | 108 004 | -0.80 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | 80 | 9 | NQI | | 0.29 | 3 | | 71 001 | +3.22 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | | | NQI | | 0.34 | 3 | | 107 010 | +27.90 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | | | NQI | | 0.38 | 3 | | 107 010 | +23.37 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | | | NQI | | 0.31 | P 1 | | 83 014 | -0.46 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | | | NQI | | 0.61 | P 1 | | 112 014 | -0.84 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | 80 | 10 | NQI | | 0.54 | P 1 | | 111 014 | -0.64 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | 80 | 12 | NQI | | 0.28 | P 1 | | 56 014 | +0.44 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | | | NQI | | 0.56 | P 1 | | 124 014 | -0.30 | 014 | LTE | LTE | 146 | 510 |
| Bobbin | 80 | 13 | NQI | | 0.41 | P 1 | | 102 012 | +0.40 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | | | NQI | | 1.24 | P 1 | | 97 014 | -0.46 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | 80 | 18 | NQI | | 0.57 | P 1 | | 124 014 | +0.48 | 014 | LTE | LTE | 145 | 510 |
| Bobbin | 80 | 19 | NQI | | 0.92 | 3 | | 107 015 | +20.69 | UTE | LTE | LTE | 111 | 510 |
| Bobbin | 80 | 25 | NQI | | 0.62 | 3 | | 109 015 | +18.73 | UTE | LTE | LTE | 84 | 510 |
| Bobbin | 80 | 26 | NQI | | 1.71 | 3 | | 133 015 | +18.31 | UTE | LTE | LTE | 83 | 510 |
| Bobbin | | | NQI | | 2.36 | 3 | | 115 015 | +17.36 | UTE | LTE | LTE | 83 | 510 |
| Bobbin | 80 | 27 | NQI | | 0.80 | 3 | | 97 015 | +15.98 to +19.86 | UTE | LTE | LTE | 84 | 510 |
| Bobbin | 80 | 28 | NQI | | 1.02 | 3 | | 110 015 | +15.85 to +18.75 | UTE | LTE | LTE | 84 | 510 |
| Bobbin | 80 | 29 | NQI | | 0.83 | 3 | | 108 015 | +16.07 | UTE | LTE | LTE | 83 | 510 |
| Bobbin | 80 | 30 | NQI | | 0.35 | P 1 | | 108 010 | -0.60 | UTE | LTE | LTE | 111 | 510 |
| Bobbin | | | NQI | | 0.77 | P 1 | | 114 015 | +0.61 | UTE | LTE | LTE | 111 | 510 |
| Bobbin | 80 | 31 | NQI | | 0.73 | 3 | | 117 015 | +16.47 | UTE | LTE | LTE | 83 | 510 |
| Bobbin | | | NQI | | 1.53 | 3 | | 120 015 | +15.84 | UTE | LTE | LTE | 83 | 510 |
| Bobbin | 80 | 33 | NQI | | 0.44 | 3 | | 94 011 | +9.67 to +23.84 | UTE | LTE | LTE | 83 | 510 |
| Bobbin | 80 | 35 | NQI | | 0.31 | P 1 | | 112 014 | -0.73 | UTE | LTE | LTE | 108 | 510 |
| Bobbin | 80 | 37 | NQI | | 0.36 | P 1 | | 79 014 | -0.28 | UTE | LTE | LTE | 108 | 510 |
| Bobbin | | | NQI | | 0.40 | P 1 | | 117 014 | -0.52 | UTE | LTE | LTE | 108 | 510 |
| Bobbin | | | NQI | | 0.43 | P 1 | | 138 014 | -0.75 | UTE | LTE | LTE | 108 | 510 |
| Bobbin | 80 | 39 | NQI | | 1.56 | 3 | | 107 015 | +14.60 | UTE | LTE | LTE | 108 | 510 |
| Bobbin | 80 | 41 | NQI | | 0.29 | 3 | | 84 015 | +15.58 | UTE | LTE | LTE | 108 | 510 |
| Bobbin | 80 | 42 | NQI | | 0.65 | P 1 | | 35 014 | -0.71 | UTE | LTE | LTE | 107 | 510 |
| Bobbin | 80 | 44 | NQI | | 1.10 | 3 | | 107 010 | +10.12 | UTE | LTE | LTE | 107 | 510 |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 20 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | *TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|----------|-----|-----|----------|---------|---------|-----|-------|-------|----------|
| Bobbin | 80 | 45 | NQI | | 1.15 3 | 131 | 010 | +10.00 | UTE | LTE | LTE | 108 | 510 | |
| Bobbin | 80 | 48 | NQI | | 0.50 P 1 | 92 | 009 | -0.77 | UTE | LTE | LTE | 108 | 510 | |
| Bobbin | 80 | 49 | NQI | | 0.47 P 1 | 101 | 009 | -0.76 | UTE | LTE | LTE | 107 | 510 | |
| Bobbin | 80 | 50 | NQI | | 0.49 P 1 | 104 | 009 | -0.79 | UTE | LTE | LTE | 108 | 510 | |
| Bobbin | 80 | 63 | NQI | | 0.51 P 1 | 62 | 011 | -0.27 | LTE | UTE | UTE | 13 | 510 | |
| Bobbin | 80 | 74 | NQI | | 0.38 P 1 | 104 | LTE | +1.71 | LTE | UTE | UTE | 11 | 510 | |
| Bobbin | 80 | 77 | DWI | | 2.05 P 1 | 22 | LTS | -0.22 | LTE | UTE | UTE | 11 | 510 | |
| Bobbin | 80 | 83 | NQI | | 0.37 P 1 | 101 | 004 | -0.82 | UTE | LTE | LTE | 127 | 510 | |
| Bobbin | 80 | 85 | NQI | | 0.54 P 1 | 82 | 010 | +0.95 | UTE | LTE | LTE | 127 | 510 | |
| Bobbin | 80 | 95 | NQI | | 0.29 3 | 102 | 008 | +34.60 | UTE | LTE | LTE | 127 | 510 | |
| Bobbin | | | NQI | | 0.45 3 | 104 | 008 | +31.69 | UTE | LTE | LTE | 127 | 510 | |
| Bobbin | | | NQI | | 0.68 3 | 104 | 008 | +30.69 | UTE | LTE | LTE | 127 | 510 | |
| Bobbin | 80 | 98 | NQI | | 0.28 3 | 108 | 015 | +6.86 | UTE | LTE | LTE | 147 | 510 | |
| Bobbin | 80 | 106 | NQI | | 0.54 3 | 97 | 010 | +17.95 | UTE | LTE | LTE | 147 | 510 | |
| Bobbin | | | NQI | | 4.93 3 | 160 | 014 | +30.56 | UTE | LTE | LTE | 147 | 510 | |
| Bobbin | 80 | 114 | NQI | | 0.26 3 | 101 | LTS | +2.37 | UTE | LTE | LTE | 147 | 510 | |
| Bobbin | 80 | 130 | NQI | | 0.44 P 1 | 100 | 010 | +0.55 | UTE | LTE | LTE | 157 | 510 | |
| Bobbin | 81 | 1 | NQI | | 0.49 3 | 108 | 014 | +8.22 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | 81 | 3 | NQI | | 0.22 3 | 111 | 014 | +1.08 | 014 | LTE | LTE | 145 | 510 | |
| Bobbin | 81 | 4 | NQI | | 0.70 P 1 | 108 | 012 | -0.60 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | | | NQI | | 1.52 P 1 | 101 | 013 | -0.78 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | | 5 | NQI | | 0.39 3 | 102 | 010 | +33.94 | 014 | LTE | LTE | 145 | 510 | |
| Bobbin | 81 | 6 | NQI | | 0.24 P 1 | 118 | 013 | +0.27 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | | | NQI | | 0.63 P 1 | 96 | 012 | -0.71 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | 81 | 7 | ODI | 8 | 1.36 3 | 111 | 011 | +1.05 | 014 | LTE | LTE | 145 | 510 | |
| Bobbin | | | NQI | | 0.25 P 1 | 88 | 013 | +0.22 | 014 | LTE | LTE | 145 | 510 | |
| Bobbin | | | NQI | | 0.36 P 1 | 98 | 011 | +1.29 | 014 | LTE | LTE | 145 | 510 | |
| Bobbin | | | NQI | | 0.55 P 1 | 117 | 012 | -0.68 | 014 | LTE | LTE | 145 | 510 | |
| Bobbin | 81 | 9 | NQI | | 0.36 P 1 | 128 | 014 | -0.88 | 014 | LTE | LTE | 145 | 510 | |
| Bobbin | | | NQI | | 0.44 P 1 | 130 | 012 | -0.64 | 014 | LTE | LTE | 145 | 510 | |
| Bobbin | | | NQI | | 1.08 P 1 | 102 | 013 | -0.79 | 014 | LTE | LTE | 145 | 510 | |
| Bobbin | 81 | 10 | NQI | | 0.31 3 | 83 | 006 | +1.08 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | | | NQI | | 1.68 P 1 | 112 | 013 | -0.82 | 014 | LTE | LTE | 146 | 510 | |
| Bobbin | 81 | 11 | NQI | | 1.67 P 1 | 103 | 013 | -0.77 | 014 | LTE | LTE | 145 | 510 | |
| Bobbin | 81 | 13 | NQI | | 0.89 P 1 | 134 | 013 | -0.71 | UTE | LTE | LTE | 79 | 510 | |
| Bobbin | 81 | 14 | NQI | | 0.50 P 1 | 123 | 014 | -0.79 | UTE | LTE | LTE | 111 | 510 | |
| Bobbin | | | NQI | | 0.56 P 1 | 110 | 013 | -0.73 | UTE | LTE | LTE | 111 | 510 | |
| Bobbin | 81 | 15 | NQI | | 0.31 3 | 103 | 011 | +7.75 | UTE | LTE | LTE | 111 | 510 | |
| Bobbin | 81 | 16 | ADI | | 0.99 6 | 81 | 011 | +12.99 | UTE | LTE | LTE | 111 | 510 | |
| Bobbin | | | ADI | | 1.30 6 | 66 | 015 | +24.85 | UTE | LTE | LTE | 111 | 510 | |
| Bobbin | | | NQI | | 0.14 P 1 | 110 | 011 | -0.12 | UTE | LTE | LTE | 111 | 510 | |
| Bobbin | 81 | 22 | NQI | | 0.35 3 | 117 | 005 | +32.24 | UTE | LTE | LTE | 80 | 510 | |
| Bobbin | 81 | 24 | NQI | | 0.48 3 | 108 | 015 | +14.19 | UTS | LTE | LTE | 80 | 510 | |
| Bobbin | 81 | 27 | NQI | | 0.37 P 1 | 102 | 007 | -0.80 | UTE | LTE | LTE | 111 | 510 | |
| Bobbin | 81 | 28 | NQI | | 0.39 3 | 110 | 015 | +18.54 | UTE | LTE | LTE | 111 | 510 | |
| Bobbin | | | NQI | | 0.35 P 1 | 137 | 012 | +0.76 | UTE | LTE | LTE | 111 | 510 | |
| Bobbin | 81 | 29 | NQI | | 0.52 3 | 103 | 015 | +19.09 | UTE | LTE | LTE | 111 | 510 | |
| Bobbin | 81 | 30 | NQI | | 0.52 P 1 | 86 | 015 | +0.55 | UTE | LTE | LTE | 111 | 510 | |
| Bobbin | 81 | 37 | NQI | | 0.34 P 1 | 103 | 014 | +0.03 | UTE | LTE | LTE | 107 | 510 | |
| Bobbin | | | NQI | | 0.45 P 1 | 102 | 014 | +0.32 | UTE | LTE | LTE | 107 | 510 | |
| Bobbin | 81 | 38 | NQI | | 0.52 3 | 134 | 010 | +8.59 | UTE | LTE | LTE | 108 | 510 | |
| Bobbin | | | NQI | | 0.53 P 1 | 123 | 010 | +0.54 | UTE | LTE | LTE | 108 | 510 | |
| Bobbin | 81 | 40 | NQI | | 1.24 P 1 | 94 | 010 | +0.43 | UTE | LTE | LTE | 108 | 510 | |
| Bobbin | 81 | 42 | NQI | | 0.79 P 1 | 87 | 009 | -0.77 | UTE | LTE | LTE | 108 | 510 | |
| Bobbin | 81 | 43 | NQI | | 0.46 3 | 76 | 014 | +11.19 | UTE | LTE | LTE | 107 | 510 | |
| Bobbin | | | NQI | | 0.46 3 | 99 | 014 | +21.86 | UTE | LTE | LTE | 107 | 510 | |
| Bobbin | | | NQI | | 0.77 3 | 111 | 010 | +7.93 | UTE | LTE | LTE | 107 | 510 | |
| Bobbin | | | NQI | | 0.75 P 1 | 117 | 009 | -0.73 | UTE | LTE | LTE | 107 | 510 | |
| Bobbin | | | NQI | | 1.00 P 1 | 37 | 008 | +0.68 | UTE | LTE | LTE | 107 | 510 | |
| Bobbin | 81 | 45 | NQI | | 0.82 P 1 | 114 | 010 | +0.55 | UTE | LTE | LTE | 107 | 510 | |
| Bobbin | 81 | 46 | NQI | | 0.44 P 1 | 44 | 009 | -0.75 | UTE | LTE | LTE | 108 | 510 | |
| Bobbin | | | NQI | | 0.62 P 1 | 106 | 009 | +0.44 | UTE | LTE | LTE | 108 | 510 | |
| Bobbin | 81 | 47 | NQI | | 0.32 P 1 | 84 | 008 | +0.52 | UTE | LTE | LTE | 108 | 510 | |
| Bobbin | | | NQI | | 0.79 P 1 | 103 | 009 | -0.77 | UTE | LTE | LTE | 108 | 510 | |
| Bobbin | 81 | 48 | NQI | | 0.57 P 1 | 104 | 008 | +0.61 | UTE | LTE | LTE | 108 | 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 21 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|------|-----|----------|---------|---------|-----|-------|---------|----------|
| Bobbin | | | | | NQI | 0.91 | P 1 | 97 009 | -0.72 | UTE | LTE | LTE | 108 510 | |
| Bobbin | 81 | 54 | | | NQI | 0.56 | P 1 | 124 008 | -0.56 | UTE | LTE | LTE | 108 510 | |
| Bobbin | 81 | 55 | | | NQI | 0.22 | P 1 | 130 008 | +0.67 | UTE | LTE | LTE | 108 510 | |
| Bobbin | | | | | NQI | 0.43 | P 1 | 100 007 | -0.74 | UTE | LTE | LTE | 108 510 | |
| Bobbin | | | | | NQI | 0.72 | P 1 | 98 009 | -0.80 | UTE | LTE | LTE | 108 510 | |
| Bobbin | | | | | NQI | 0.75 | P 1 | 94 008 | -0.69 | UTE | LTE | LTE | 108 510 | |
| Bobbin | 81 | 56 | | | NQI | 0.60 | P 1 | 45 005 | +0.57 | UTE | LTE | LTE | 108 510 | |
| Bobbin | | | | | NQI | 0.61 | P 1 | 82 007 | +0.49 | UTE | LTE | LTE | 108 510 | |
| Bobbin | | | | | NQI | 0.72 | P 1 | 85 009 | -0.72 | UTE | LTE | LTE | 108 510 | |
| Bobbin | | | | | NQI | 0.84 | P 1 | 88 008 | -0.67 | UTE | LTE | LTE | 108 510 | |
| Bobbin | | | | | NQI | 1.52 | P 1 | 92 007 | -0.72 | UTE | LTE | LTE | 108 510 | |
| Bobbin | 81 | 57 | | | NQI | 0.72 | P 1 | 69 005 | +0.63 | LTE | UTE | UTE | 13 510 | |
| Bobbin | 81 | 59 | | | NQI | 0.89 | P 1 | 91 005 | +0.68 | LTE | UTE | UTE | 13 510 | |
| Bobbin | 81 | 63 | | | NQI | 0.28 | 3 | 84 015 | +44.77 | LTE | UTE | UTE | 10 510 | |
| Bobbin | | | | | NQI | 0.33 | 3 | 104 015 | +41.64 | LTE | UTE | UTE | 10 510 | |
| Bobbin | | | | | NQI | 0.38 | 3 | 104 015 | +29.68 | LTE | UTE | UTE | 10 510 | |
| Bobbin | | | | | NQI | 0.39 | 3 | 58 015 | +30.68 | LTE | UTE | UTE | 10 510 | |
| Bobbin | 81 | 93 | | | NQI | 0.63 | P 1 | 93 014 | +1.22 | UTE | LTE | LTE | 126 510 | |
| Bobbin | 81 | 95 | | | NQI | 0.47 | 3 | 106 009 | +25.11 | UTE | LTE | LTE | 126 510 | |
| Bobbin | | | | | NQI | 0.59 | 3 | 97 009 | +24.03 | UTE | LTE | LTE | 126 510 | |
| Bobbin | 81 | 120 | | | NQI | 1.71 | P 1 | 100 014 | +0.70 | UTE | LTE | LTE | 148 510 | |
| Bobbin | 81 | 124 | | | NQI | 0.59 | 3 | 87 014 | +33.09 | UTE | LTE | LTE | 148 510 | |
| Bobbin | 81 | 130 | | | NQI | 0.30 | 3 | 67 015 | +33.74 | UTE | LTE | LTE | 157 510 | |
| Bobbin | | | | | NQI | 0.40 | 3 | 87 015 | +6.79 | UTE | LTE | LTE | 157 510 | |
| Bobbin | | | | | NQI | 0.59 | 3 | 117 013 | +1.15 | UTE | LTE | LTE | 157 510 | |
| Bobbin | | | | | NQI | 0.27 | P 1 | 82 013 | +0.85 | UTE | LTE | LTE | 157 510 | |
| Bobbin | 81 | 131 | | | NQI | 0.42 | 3 | 70 015 | +29.48 | UTE | LTE | LTE | 157 510 | |
| Bobbin | | | | | NQI | 0.47 | 3 | 78 015 | +13.95 | UTE | LTE | LTE | 157 510 | |
| Bobbin | 82 | 1 | | | NQI | 0.43 | P 1 | 75 011 | +0.65 | 014 | LTE | LTE | 146 510 | |
| Bobbin | 82 | 6 | | | NQI | 1.34 | 3 | 122 011 | +1.14 | 014 | LTE | LTE | 145 510 | |
| Bobbin | | | | | NQI | 0.25 | P 1 | 70 010 | +0.00 | 014 | LTE | LTE | 145 510 | |
| Bobbin | 82 | 9 | | | NQI | 0.37 | P 1 | 92 013 | +0.62 | 014 | LTE | LTE | 145 510 | |
| Bobbin | | | | | NQI | 0.88 | P 1 | 106 011 | +0.72 | 014 | LTE | LTE | 145 510 | |
| Bobbin | 82 | 10 | | | NQI | 0.28 | 3 | 110 011 | +8.55 | UTE | LTE | LTE | 117 510 | |
| Bobbin | 82 | 14 | | | NQI | 0.71 | P 1 | 96 UTS | +0.17 | UTE | LTE | LTE | 111 510 | |
| Bobbin | 82 | 32 | | | NQI | 0.49 | P 1 | 102 010 | +0.58 | UTE | LTE | LTE | 111 510 | |
| Bobbin | 82 | 33 | | | NQI | 0.28 | P 1 | 100 010 | +0.38 | UTE | LTE | LTE | 111 510 | |
| Bobbin | 82 | 39 | | | NQI | 0.44 | P 1 | 82 010 | +0.49 | UTE | LTE | LTE | 108 510 | |
| Bobbin | 82 | 40 | | | NQI | 0.35 | P 1 | 94 010 | +0.39 | UTE | LTE | LTE | 107 510 | |
| Bobbin | 82 | 41 | | | NQI | 0.47 | P 1 | 78 008 | +0.65 | UTE | LTE | LTE | 108 510 | |
| Bobbin | | | | | NQI | 0.52 | P 1 | 91 009 | -0.60 | UTE | LTE | LTE | 108 510 | |
| Bobbin | | | | | NQI | 0.56 | P 1 | 51 010 | +0.52 | UTE | LTE | LTE | 108 510 | |
| Bobbin | | | | | NQI | 0.57 | P 1 | 117 008 | -0.72 | UTE | LTE | LTE | 108 510 | |
| Bobbin | 82 | 42 | | | NQI | 0.32 | 3 | 102 010 | +1.57 | UTE | LTE | LTE | 108 510 | |
| Bobbin | | | | | NQI | 0.84 | P 1 | 99 009 | -0.67 | UTE | LTE | LTE | 108 510 | |
| Bobbin | 82 | 43 | | | NQI | 0.34 | P 1 | 75 008 | +0.59 | UTE | LTE | LTE | 108 510 | |
| Bobbin | | | | | NQI | 0.65 | P 1 | 123 007 | -0.72 | UTE | LTE | LTE | 108 510 | |
| Bobbin | | | | | NQI | 0.66 | P 1 | 64 009 | -0.70 | UTE | LTE | LTE | 108 510 | |
| Bobbin | | | | | NQI | 0.88 | P 1 | 95 010 | +0.54 | UTE | LTE | LTE | 108 510 | |
| Bobbin | 82 | 44 | | | NQI | 0.34 | P 1 | 113 008 | +0.51 | UTE | LTE | LTE | 108 510 | |
| Bobbin | | | | | NQI | 0.51 | P 1 | 91 009 | -0.67 | UTE | LTE | LTE | 108 510 | |
| Bobbin | | | | | NQI | 0.85 | P 1 | 110 010 | +0.52 | UTE | LTE | LTE | 108 510 | |
| Bobbin | | | | | NQI | 0.90 | P 1 | 105 008 | -0.67 | UTE | LTE | LTE | 108 510 | |
| Bobbin | | | | | NQI | 0.97 | P 1 | 159 007 | -0.69 | UTE | LTE | LTE | 108 510 | |
| Bobbin | 82 | 46 | | | NQI | 0.73 | P 1 | 112 009 | -0.72 | UTE | LTE | LTE | 108 510 | |
| Bobbin | 82 | 48 | | | NQI | 0.62 | P 1 | 112 008 | -0.59 | UTE | LTE | LTE | 108 510 | |
| Bobbin | 82 | 83 | | | NQI | 0.29 | 3 | 84 LTS | +15.09 | UTE | LTE | LTE | 127 510 | |
| Bobbin | 82 | 92 | | | NQI | 0.31 | 3 | 79 007 | +14.91 | UTE | LTE | LTE | 127 510 | |
| Bobbin | 82 | 109 | | | NQI | 0.26 | 3 | 85 008 | +32.06 | UTE | LTE | LTE | 147 510 | |
| Bobbin | 82 | 113 | | | NQI | 0.24 | 3 | 85 015 | +33.32 | UTE | LTE | LTE | 147 510 | |
| Bobbin | 82 | 122 | ODI | 2 | | 0.26 | P 1 | 103 012 | +1.04 | UTE | LTE | LTE | 148 510 | |
| Bobbin | 82 | 123 | | | NQI | 0.25 | 3 | 107 014 | +27.01 | UTE | LTE | LTE | 148 510 | |
| Bobbin | 82 | 125 | | | NQI | 0.54 | P 1 | 95 014 | +0.73 | UTE | LTE | LTE | 148 510 | |
| Bobbin | 83 | 1 | | | NQI | 0.38 | 3 | 88 013 | +20.41 | 014 | LTE | LTE | 146 510 | |
| Bobbin | 83 | 3 | | | NQI | 0.42 | 3 | 112 014 | +14.54 | 014 | LTE | LTE | 145 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 22 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|------|-----|----------|------------------|---------|-----|-------|---------|----------|
| Bobbin | | | | | NQI | 0.57 | P 1 | 103 010 | -0.42 | 014 | LTE | LTE | 145 510 | |
| Bobbin | | | | | NQI | 0.71 | P 1 | 105 014 | -0.77 | 014 | LTE | LTE | 145 510 | |
| Bobbin | | | | | NQI | 0.82 | P 1 | 88 010 | +0.02 | 014 | LTE | LTE | 145 510 | |
| Bobbin | 83 | 6 | | | NQI | 0.94 | 3 | 108 010 | +33.81 | 014 | LTE | LTE | 146 510 | |
| Bobbin | 83 | 7 | | | NQI | 0.41 | 3 | 115 010 | +33.52 | 014 | LTE | LTE | 146 510 | |
| Bobbin | | | | | NQI | 0.70 | P 1 | 93 011 | +0.92 | 014 | LTE | LTE | 146 510 | |
| Bobbin | 83 | 8 | | | NQI | 0.42 | 3 | 108 011 | +5.37 | 014 | LTE | LTE | 145 510 | |
| Bobbin | | | | | NQI | 0.46 | P 1 | 120 010 | -0.62 | 014 | LTE | LTE | 145 510 | |
| Bobbin | | | | | NQI | 0.82 | P 1 | 91 010 | +0.33 | 014 | LTE | LTE | 145 510 | |
| Bobbin | | | | | NQI | 1.41 | P 1 | 92 010 | +0.02 | 014 | LTE | LTE | 145 510 | |
| Bobbin | 83 | 15 | | | NQI | 0.33 | 3 | 88 012 | +34.79 | UTE | LTE | LTE | 111 510 | |
| Bobbin | 83 | 26 | | | NQI | 0.64 | P 1 | 88 010 | +0.30 | UTE | LTE | LTE | 80 510 | |
| Bobbin | 83 | 28 | | | NQI | 0.30 | 3 | 88 010 | +16.10 | UTE | LTE | LTE | 111 510 | |
| Bobbin | | | | | NQI | 0.87 | P 1 | 101 010 | +0.45 | UTE | LTE | LTE | 111 510 | |
| Bobbin | 83 | 31 | | | NQI | 0.46 | P 1 | 133 009 | +0.58 | UTE | LTE | LTE | 111 510 | |
| Bobbin | 83 | 32 | | | NQI | 0.53 | P 1 | 128 010 | -0.75 | UTE | LTE | LTE | 111 510 | |
| Bobbin | 83 | 34 | | | NQI | 0.52 | P 1 | 109 010 | +0.55 | UTE | LTE | LTE | 111 510 | |
| Bobbin | 83 | 37 | | | NQI | 0.31 | P 1 | 99 010 | +0.41 | UTE | LTE | LTE | 108 510 | |
| Bobbin | 83 | 43 | | | NQI | 0.40 | P 1 | 69 009 | -0.64 | UTE | LTE | LTE | 108 510 | |
| Bobbin | | | | | NQI | 1.01 | P 1 | 73 008 | -0.05 | UTE | LTE | LTE | 108 510 | |
| Bobbin | 83 | 45 | | | NQI | 0.61 | 3 | 105 015 | +45.13 | UTE | LTE | LTE | 108 510 | |
| Bobbin | | | | | NQI | 0.41 | P 1 | 92 009 | -0.72 | UTE | LTE | LTE | 108 510 | |
| Bobbin | 83 | 98 | | | NQI | 0.35 | 3 | 75 006 | +29.48 | UTE | LTE | LTE | 127 510 | |
| Bobbin | 83 | 104 | | | NQI | 0.37 | 3 | 93 010 | +5.41 | UTE | LTE | LTE | 147 510 | |
| Bobbin | 83 | 111 | | | NQI | 0.38 | 3 | 70 015 | +10.30 | UTE | LTE | LTE | 148 510 | |
| Bobbin | 83 | 117 | | | NQI | 0.42 | 3 | 93 004 | +6.74 | UTE | LTE | LTE | 148 510 | |
| Bobbin | | | | | NQI | 0.54 | 3 | 77 010 | +22.03 | UTE | LTE | LTE | 148 510 | |
| Bobbin | 83 | 132 | | | NQI | 1.38 | 3 | 100 015 | +13.11 to +26.73 | UTE | LTE | LTE | 157 510 | |
| Bobbin | 84 | 1 | | | NQI | 0.53 | P 1 | 121 011 | -0.62 | 014 | LTE | LTE | 146 510 | |
| Bobbin | 84 | 2 | | | NQI | 0.28 | 3 | 94 011 | +5.12 | 014 | LTE | LTE | 145 510 | |
| Bobbin | | | | | NQI | 0.33 | P 1 | 106 010 | +0.17 | 014 | LTE | LTE | 145 510 | |
| Bobbin | | | | | NQI | 0.48 | P 1 | 103 010 | -0.24 | 014 | LTE | LTE | 145 510 | |
| Bobbin | 84 | 3 | | | NQI | 0.66 | P 1 | 72 010 | +0.47 | 014 | LTE | LTE | 146 510 | |
| Bobbin | 84 | 6 | | | NQI | 1.33 | 3 | 112 010 | +3.55 | 014 | LTE | LTE | 146 510 | |
| Bobbin | 84 | 9 | | | NQI | 0.59 | P 1 | 101 010 | +0.46 | UTE | LTE | LTE | 80 510 | |
| Bobbin | 84 | 10 | | | NQI | 0.58 | P 1 | 100 UTS | +0.10 | UTE | LTE | LTE | 117 510 | |
| Bobbin | 84 | 17 | | | NQI | 0.51 | 3 | 110 013 | +21.38 | UTE | LTE | LTE | 80 510 | |
| Bobbin | 84 | 19 | | | NQI | 0.38 | P 1 | 74 011 | +0.62 | UTE | LTE | LTE | 80 510 | |
| Bobbin | 84 | 23 | | | NQI | 0.38 | P 1 | 101 004 | -0.79 | UTE | LTE | LTE | 80 510 | |
| Bobbin | 84 | 26 | | | NQI | 0.50 | P 1 | 104 010 | +0.54 | UTE | LTE | LTE | 79 510 | |
| Bobbin | 84 | 28 | | | NQI | 0.35 | P 1 | 102 010 | +0.42 | UTE | LTE | LTE | 111 510 | |
| Bobbin | 84 | 29 | | | NQI | 0.66 | P 1 | 126 004 | -0.80 | UTE | LTE | LTE | 111 510 | |
| Bobbin | 84 | 30 | | | NQI | 0.50 | P 1 | 65 015 | +0.67 | UTE | LTE | LTE | 111 510 | |
| Bobbin | 84 | 32 | | | NQI | 0.39 | P 1 | 121 010 | +0.48 | UTE | LTE | LTE | 111 510 | |
| Bobbin | 84 | 55 | | | NQI | 1.17 | P 1 | 68 005 | +0.62 | UTE | LTE | LTE | 108 510 | |
| Bobbin | 84 | 103 | | | NQI | 0.19 | 3 | 90 015 | +20.97 | UTE | LTE | LTE | 143 510 | |
| Bobbin | 84 | 118 | ODI | 16 | | 0.51 | P 1 | 100 014 | +0.95 | UTE | LTE | LTE | 143 510 | |
| Bobbin | | | ODI | 32 | | 1.56 | P 1 | 94 014 | +0.74 | UTE | LTE | LTE | 143 510 | |
| Bobbin | 84 | 121 | | | NQI | 0.77 | 3 | 71 014 | +1.15 | UTE | LTE | LTE | 148 510 | |
| Bobbin | 84 | 122 | | | NQI | 0.82 | P 1 | 71 014 | +0.78 | UTE | LTE | LTE | 148 510 | |
| Bobbin | 85 | 4 | | | NQI | 1.08 | 3 | 122 010 | +1.80 | 014 | LTE | LTE | 146 510 | |
| Bobbin | 85 | 8 | | | NQI | 0.67 | P 1 | 106 UTS | +0.10 | UTE | LTE | LTE | 117 510 | |
| Bobbin | 85 | 9 | | | NQI | 0.60 | P 1 | 117 009 | -0.66 | UTE | LTE | LTE | 80 510 | |
| Bobbin | 85 | 13 | | | NQI | 0.30 | 3 | 72 003 | +10.36 | UTE | LTE | LTE | 80 510 | |
| Bobbin | 85 | 14 | | | NQI | 0.36 | P 1 | 121 010 | -0.52 | UTE | LTE | LTE | 111 510 | |
| Bobbin | 85 | 22 | | | NQI | 0.42 | 3 | 96 011 | +5.83 | UTE | LTE | LTE | 111 510 | |
| Bobbin | 85 | 24 | | | NQI | 0.41 | P 1 | 118 010 | +0.48 | UTE | LTE | LTE | 111 510 | |
| Bobbin | 85 | 25 | | | NQI | 0.91 | P 1 | 136 010 | +0.58 | UTE | LTE | LTE | 75 510 | |
| Bobbin | 85 | 26 | | | NQI | 0.65 | P 1 | 78 010 | +0.54 | UTE | LTE | LTE | 111 510 | |
| Bobbin | | | | | NQI | 0.70 | P 1 | 135 010 | -0.77 | UTE | LTE | LTE | 111 510 | |
| Bobbin | 85 | 27 | | | NQI | 0.45 | P 1 | 100 010 | -0.72 | UTE | LTE | LTE | 75 510 | |
| Bobbin | 85 | 34 | | | NQI | 0.39 | P 1 | 119 009 | -0.69 | UTE | LTE | LTE | 74 510 | |
| Bobbin | 85 | 36 | | | NQI | 0.47 | P 1 | 100 009 | -0.73 | UTE | LTE | LTE | 108 510 | |
| Bobbin | 85 | 42 | | | NQI | 0.60 | P 1 | 85 008 | -0.72 | UTE | LTE | LTE | 108 510 | |
| Bobbin | | | | | NQI | 1.12 | P 1 | 92 009 | -0.73 | UTE | LTE | LTE | 108 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 23 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|-----|-----|----------|---------|---------|-----|-------|---------|----------|
| Bobbin | 85 | 44 | NQI | | 0.55 | P | 1 | 107 008 | -0.69 | UTE | LTE | LTE | 108 510 | |
| Bobbin | 85 | 51 | NQI | | 0.34 | 3 | | 100 010 | +9.11 | UTE | LTE | LTE | 107 510 | |
| Bobbin | 85 | 56 | NQI | | 0.27 | P | 1 | 99 015 | +0.16 | UTE | LTE | LTE | 108 510 | |
| Bobbin | 85 | 84 | NQI | | 0.28 | 3 | | 98 010 | +21.34 | UTE | LTE | LTE | 126 510 | |
| Bobbin | 85 | 91 | NQI | | 0.41 | 3 | | 72 012 | +18.34 | UTE | LTE | LTE | 127 510 | |
| Bobbin | 85 | 95 | NQI | | 0.39 | 3 | | 93 007 | +8.86 | UTE | LTE | LTE | 127 510 | |
| Bobbin | 85 | 96 | NQI | | 0.25 | 3 | | 101 006 | +33.91 | UTE | LTE | LTE | 126 510 | |
| Bobbin | 85 | 110 | NQI | | 0.22 | 3 | | 100 014 | +1.25 | UTE | LTE | LTE | 143 510 | |
| Bobbin | 85 | 114 | NQI | | 0.29 | P | 1 | 98 014 | +1.08 | UTE | LTE | LTE | 143 510 | |
| Bobbin | 85 | 118 | NQI | | 0.78 | 3 | | 95 002 | +32.63 | UTE | LTE | LTE | 143 510 | |
| Bobbin | 85 | 125 | NQI | | 0.58 | P | 1 | 122 014 | +0.76 | UTE | LTE | LTE | 143 510 | |
| Bobbin | 85 | 126 | NQI | | 2.39 | 3 | | 128 015 | +41.01 | UTE | LTE | LTE | 143 510 | |
| Bobbin | 85 | 130 | NQI | | 0.68 | P | 1 | 61 009 | +0.07 | UTE | LTE | LTE | 157 510 | |
| Bobbin | 86 | 1 | NQI | | 0.51 | P | 1 | 123 014 | +0.62 | 014 | LTE | LTE | 146 510 | |
| Bobbin | 86 | 2 | NQI | | 0.26 | 3 | | 105 010 | +12.55 | 014 | LTE | LTE | 145 510 | |
| Bobbin | | | NQI | | 1.12 | P | 1 | 150 013 | -0.62 | 014 | LTE | LTE | 145 510 | |
| Bobbin | 86 | 3 | NQI | | 0.25 | 3 | | 96 012 | +35.45 | 014 | LTE | LTE | 146 510 | |
| Bobbin | 86 | 5 | NQI | | 0.29 | P | 1 | 71 009 | +0.38 | 014 | LTE | LTE | 146 510 | |
| Bobbin | 86 | 11 | NQI | | 0.82 | P | 1 | 120 010 | -0.67 | UTE | LTE | LTE | 75 510 | |
| Bobbin | 86 | 28 | NQI | | 0.23 | P | 1 | 96 009 | -0.49 | UTE | LTE | LTE | 74 510 | |
| Bobbin | 86 | 30 | NQI | | 0.32 | P | 1 | 97 009 | -0.69 | UTE | LTE | LTE | 74 510 | |
| Bobbin | 86 | 32 | NQI | | 0.71 | P | 1 | 84 009 | -0.70 | UTE | LTE | LTE | 74 510 | |
| Bobbin | 86 | 34 | NQI | | 0.51 | P | 1 | 84 009 | -0.71 | UTE | LTE | LTE | 111 510 | |
| Bobbin | 86 | 36 | NQI | | 0.48 | P | 1 | 118 009 | -0.73 | UTE | LTE | LTE | 107 510 | |
| Bobbin | 86 | 51 | NQI | | 0.38 | 3 | | 93 008 | +35.99 | UTE | LTE | LTE | 108 510 | |
| Bobbin | 86 | 55 | NQI | | 0.82 | P | 1 | 118 005 | -0.74 | UTE | LTE | LTE | 108 510 | |
| Bobbin | 86 | 67 | NQI | | 0.57 | P | 1 | 85 004 | -0.72 | LTE | UTE | UTE | 11 510 | |
| Bobbin | 86 | 73 | ODI | 5 | 0.33 | 3 | | 109 006 | +33.98 | LTE | UTE | UTE | 11 510 | |
| Bobbin | 86 | 79 | NQI | | 0.45 | 3 | | 111 005 | +27.81 | UTE | LTE | LTE | 158 510 | |
| Bobbin | 86 | 90 | DWI | | 0.83 | P | 1 | 47 LTS | -0.07 | UTE | LTE | LTE | 126 510 | |
| Bobbin | 86 | 103 | NQI | | 0.50 | 3 | | 108 015 | +31.20 | UTE | LTE | LTE | 144 510 | |
| Bobbin | 86 | 113 | NQI | | 0.33 | 3 | | 85 009 | +38.23 | UTE | LTE | LTE | 144 510 | |
| Bobbin | 86 | 126 | NQI | | 2.58 | P | 1 | 100 014 | +0.66 | UTE | LTE | LTE | 143 510 | |
| Bobbin | 87 | 9 | NQI | | 0.85 | P | 1 | 139 010 | -0.68 | UTE | LTE | LTE | 75 510 | |
| Bobbin | 87 | 13 | NQI | | 0.27 | P | 1 | 71 010 | -0.38 | UTE | LTE | LTE | 75 510 | |
| Bobbin | 87 | 19 | NQI | | 0.28 | 3 | | 81 LTS | +26.28 | UTE | LTE | LTE | 75 510 | |
| Bobbin | 87 | 50 | NQI | | 0.74 | P | 1 | 126 009 | -0.81 | UTE | LTE | LTE | 107 510 | |
| Bobbin | 87 | 85 | NQI | | 0.33 | 3 | | 109 006 | +27.64 | UTE | LTE | LTE | 127 510 | |
| Bobbin | 87 | 119 | NQI | | 0.40 | P | 1 | 40 010 | +0.30 | UTE | LTE | LTE | 143 510 | |
| Bobbin | 87 | 122 | NQI | | 0.55 | P | 1 | 109 002 | +0.64 | UTE | LTE | LTE | 144 510 | |
| Bobbin | 87 | 123 | NQI | | 0.42 | P | 1 | 78 014 | +1.17 | UTE | LTE | LTE | 144 510 | |
| Bobbin | 87 | 130 | ADI | | 3.04 | 6 | | 85 012 | +15.40 | UTE | LTE | LTE | 157 510 | |
| Bobbin | 88 | 2 | NQI | | 1.65 | 3 | | 127 010 | +5.47 | 014 | LTE | LTE | 145 510 | |
| Bobbin | | | DWI | | 0.47 | P | 1 | 124 010 | +0.41 | 014 | LTE | LTE | 145 510 | |
| Bobbin | 88 | 3 | NQI | | 0.86 | P | 1 | 108 011 | +0.64 | 014 | LTE | LTE | 146 510 | |
| Bobbin | | | NQI | | 1.17 | P | 1 | 121 012 | -0.75 | 014 | LTE | LTE | 146 510 | |
| Bobbin | 88 | 5 | NQI | | 0.36 | 3 | | 66 010 | +24.44 | 014 | LTE | LTE | 145 510 | |
| Bobbin | 88 | 27 | NQI | | 0.35 | 3 | | 79 012 | +4.93 | UTE | LTE | LTE | 75 510 | |
| Bobbin | 88 | 34 | NQI | | 0.25 | 3 | | 107 009 | +33.78 | UTE | LTE | LTE | 74 510 | |
| Bobbin | 88 | 53 | NQI | | 0.27 | 3 | | 92 007 | +1.36 | UTE | LTE | LTE | 104 510 | |
| Bobbin | 88 | 64 | NQI | | 0.13 | P | 1 | 100 014 | +0.23 | LTE | UTE | UTE | 4 510 | |
| Bobbin | 88 | 69 | NQI | | 2.12 | 3 | | 12 013 | +32.46 | LTE | UTE | UTE | 6 510 | |
| Bobbin | | | NQI | | 2.39 | 3 | | 14 004 | +23.96 | LTE | UTE | UTE | 6 510 | |
| Bobbin | 88 | 95 | NQI | | 0.24 | 3 | | 62 014 | +16.87 | UTE | LTE | LTE | 126 510 | |
| Bobbin | 88 | 96 | NQI | | 0.20 | 3 | | 90 015 | +27.27 | UTE | LTE | LTE | 127 510 | |
| Bobbin | 88 | 110 | NQI | | 0.26 | 3 | | 107 007 | +23.58 | UTE | LTE | LTE | 143 510 | |
| Bobbin | 88 | 119 | NQI | | 0.31 | P | 1 | 114 007 | -0.66 | UTE | LTE | LTE | 143 510 | |
| Bobbin | 88 | 122 | NQI | | 0.43 | P | 1 | 91 015 | +0.52 | UTE | LTE | LTE | 144 510 | |
| Bobbin | 88 | 125 | NQI | | 0.44 | P | 1 | 104 006 | -0.56 | UTE | LTE | LTE | 144 510 | |
| Bobbin | 88 | 129 | NQI | | 0.56 | P | 1 | 58 008 | +0.61 | UTE | LTE | LTE | 157 510 | |
| Bobbin | 89 | 2 | NQI | | 1.13 | P | 1 | 122 011 | +0.50 | 014 | LTE | LTE | 145 510 | |
| Bobbin | 89 | 14 | NQI | | 0.31 | 3 | | 102 014 | +2.69 | UTE | LTE | LTE | 74 510 | |
| Bobbin | | | NQI | | 0.39 | 3 | | 107 014 | +3.03 | UTE | LTE | LTE | 74 510 | |
| Bobbin | 89 | 16 | NQI | | 0.59 | P | 1 | 60 009 | -0.72 | UTE | LTE | LTE | 74 510 | |
| Bobbin | 89 | 17 | NQI | | 0.61 | P | 1 | 98 009 | -0.71 | UTE | LTE | LTE | 75 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 24 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|-----|-----|----------|------------------|---------|-----|-------|---------|----------|
| Bobbin | 89 | 37 | NQI | | 0.40 | 3 | | 106 014 | +18.54 | UTE | LTE | LTE | 104 510 | |
| Bobbin | 89 | 82 | NQI | | 0.32 | 3 | | 75 010 | +15.24 | UTE | LTE | LTE | 127 510 | |
| Bobbin | 89 | 90 | NQI | | 0.47 | 3 | | 107 006 | +20.29 | UTE | LTE | LTE | 127 510 | |
| Bobbin | 89 | 102 | NQI | | 0.28 | P 1 | | 63 014 | +1.15 | UTE | LTE | LTE | 144 510 | |
| Bobbin | 89 | 105 | NQI | | 0.39 | 3 | | 84 001 | +5.21 | UTE | LTE | LTE | 143 510 | |
| Bobbin | 89 | 130 | NQI | | 0.49 | P 1 | | 93 008 | +0.65 | UTE | LTE | LTE | 157 510 | |
| Bobbin | 90 | 6 | NQI | | 0.85 | P 1 | | 125 009 | -0.69 | UTE | LTE | LTE | 75 510 | |
| Bobbin | 90 | 19 | NQI | | 0.27 | 3 | | 71 011 | +33.38 | UTE | LTE | LTE | 112 510 | |
| Bobbin | 90 | 43 | ODI | 11 | 1.24 | P 1 | | 100 015 | +0.75 | UTE | LTE | LTE | 103 510 | |
| Bobbin | 90 | 57 | NQI | | 0.25 | 3 | | 85 011 | +14.87 | UTE | LTE | LTE | 103 510 | |
| Bobbin | | | NQI | | 0.33 | 3 | | 101 008 | +24.39 | UTE | LTE | LTE | 103 510 | |
| Bobbin | 90 | 107 | NQI | | 0.40 | P 1 | | 109 UTS | +5.75 | UTE | LTE | LTE | 143 510 | |
| Bobbin | 90 | 115 | ODI | 32 | 1.02 | P 1 | | 94 014 | +1.05 | UTE | LTE | LTE | 143 510 | |
| Bobbin | 91 | 2 | NQI | | 1.90 | P 1 | | 101 011 | +0.48 | 014 | LTE | LTE | 145 510 | |
| Bobbin | 91 | 17 | NQI | | 0.82 | P 1 | | 84 015 | +0.54 | UTE | LTE | LTE | 75 510 | |
| Bobbin | 91 | 59 | NQI | | 0.28 | 3 | | 74 011 | +25.25 | LTE | UTE | UTE | 2 510 | |
| Bobbin | 91 | 65 | NQI | | 0.33 | 3 | | 91 014 | +17.01 | LTE | UTE | UTE | 2 510 | |
| Bobbin | 91 | 70 | NQI | | 0.26 | 3 | | 85 015 | +21.32 | LTE | UTE | UTE | 2 510 | |
| Bobbin | 91 | 74 | NQI | | 0.79 | 3 | | 13 015 | +18.11 | LTE | UTE | UTE | 2 510 | |
| Bobbin | 91 | 80 | NQI | | 0.21 | 3 | | 83 010 | +27.50 | UTE | LTE | LTE | 127 510 | |
| Bobbin | | | NQI | | 0.38 | 3 | | 85 011 | +21.51 | UTE | LTE | LTE | 127 510 | |
| Bobbin | 91 | 84 | NQI | | 0.48 | 3 | | 91 002 | +33.23 | UTE | LTE | LTE | 126 510 | |
| Bobbin | 91 | 86 | NQI | | 0.88 | 3 | | 117 005 | +15.09 | UTE | LTE | LTE | 158 510 | |
| Bobbin | 91 | 87 | NQI | | 0.38 | 3 | | 96 010 | +34.29 | UTE | LTE | LTE | 126 510 | |
| Bobbin | | | NQI | | 0.59 | 3 | | 89 010 | +4.96 | UTE | LTE | LTE | 126 510 | |
| Bobbin | 91 | 90 | NQI | | 0.38 | 3 | | 108 012 | +4.75 | UTE | LTE | LTE | 127 510 | |
| Bobbin | | | NQI | | 0.42 | 3 | | 98 010 | +26.36 | UTE | LTE | LTE | 127 510 | |
| Bobbin | | | NQI | | 0.47 | 3 | | 91 006 | +34.81 | UTE | LTE | LTE | 127 510 | |
| Bobbin | 91 | 92 | NQI | | 0.31 | 3 | | 93 010 | +16.08 | UTE | LTE | LTE | 124 510 | |
| Bobbin | | | NQI | | 0.56 | 3 | | 106 010 | +32.19 | UTE | LTE | LTE | 124 510 | |
| Bobbin | 91 | 99 | NQI | | 0.17 | 3 | | 74 013 | +20.63 | UTE | LTE | LTE | 142 510 | |
| Bobbin | 91 | 107 | NQI | | 0.56 | P 1 | | 77 014 | +1.03 | UTE | LTE | LTE | 159 510 | |
| Bobbin | 91 | 118 | NQI | | 0.36 | P 1 | | 74 015 | +0.18 | UTE | LTE | LTE | 141 510 | |
| Bobbin | | | NQI | | 0.43 | P 1 | | 78 014 | +1.04 | UTE | LTE | LTE | 141 510 | |
| Bobbin | 91 | 119 | NQI | | 0.80 | P 1 | | 111 015 | -0.66 | UTE | LTE | LTE | 142 510 | |
| Bobbin | 91 | 120 | NQI | | 0.37 | P 1 | | 136 008 | -0.79 | UTE | LTE | LTE | 141 510 | |
| Bobbin | 91 | 125 | NQI | | 1.19 | 3 | | 118 014 | +2.59 | UTE | LTE | LTE | 157 510 | |
| Bobbin | | | NQI | | 0.52 | P 1 | | 67 009 | +0.49 | UTE | LTE | LTE | 157 510 | |
| Bobbin | | | ODI | 35 | 1.34 | P 1 | | 90 014 | +2.38 | UTE | LTE | LTE | 157 510 | |
| Bobbin | 92 | 4 | NQI | | 0.43 | 3 | | 52 009 | +11.78 | 014 | LTE | LTE | 146 510 | |
| Bobbin | 92 | 55 | NQI | | 0.29 | 3 | | 91 012 | +1.84 | UTE | LTE | LTE | 104 510 | |
| Bobbin | 92 | 56 | NQI | | 0.42 | 3 | | 85 002 | +29.41 | UTE | LTE | LTE | 103 510 | |
| Bobbin | 92 | 61 | NQI | | 0.38 | 3 | | 88 006 | +31.59 | LTE | UTE | UTE | 2 510 | |
| Bobbin | 92 | 73 | NQI | | 0.31 | 3 | | 98 010 | +2.37 | LTE | UTE | UTE | 2 510 | |
| Bobbin | | | NQI | | 0.46 | 3 | | 113 006 | +4.34 | LTE | UTE | UTE | 2 510 | |
| Bobbin | 92 | 81 | NQI | | 0.21 | 3 | | 97 015 | +2.84 | UTE | LTE | LTE | 125 510 | |
| Bobbin | 92 | 89 | NQI | | 0.33 | 3 | | 84 010 | +25.22 | UTE | LTE | LTE | 124 510 | |
| Bobbin | | | NQI | | 0.40 | 3 | | 65 010 | +26.50 | UTE | LTE | LTE | 124 510 | |
| Bobbin | | | NQI | | 0.61 | 3 | | 52 010 | +27.78 | UTE | LTE | LTE | 124 510 | |
| Bobbin | 92 | 90 | NQI | | 0.43 | 3 | | 58 008 | +5.57 | UTE | LTE | LTE | 125 510 | |
| Bobbin | 92 | 109 | NQI | | 0.54 | 3 | | 89 012 | +30.74 | UTE | LTE | LTE | 141 510 | |
| Bobbin | 92 | 112 | NQI | | 0.30 | 3 | | 70 008 | +32.07 | UTE | LTE | LTE | 142 510 | |
| Bobbin | | | NQI | | 0.61 | 3 | | 86 006 | +35.48 | UTE | LTE | LTE | 142 510 | |
| Bobbin | 92 | 115 | NQI | | 0.36 | 3 | | 74 014 | +31.27 | UTE | LTE | LTE | 142 510 | |
| Bobbin | 92 | 124 | NQI | | 0.38 | P 1 | | 98 006 | -0.43 | UTE | LTE | LTE | 141 510 | |
| Bobbin | 93 | 1 | NQI | | 0.25 | P 1 | | 106 011 | +0.46 | 014 | LTE | LTE | 146 510 | |
| Bobbin | | | NQI | | 0.45 | P 1 | | 92 010 | +0.44 | 014 | LTE | LTE | 146 510 | |
| Bobbin | 93 | 3 | NQI | | 0.39 | P 1 | | 73 003 | +0.78 | 014 | LTE | LTE | 146 510 | |
| Bobbin | | | NQI | | 0.52 | P 1 | | 109 010 | +0.62 | 014 | LTE | LTE | 146 510 | |
| Bobbin | 93 | 11 | NQI | | 0.39 | 3 | | 90 001 | +27.50 | UTE | LTE | LTE | 75 510 | |
| Bobbin | 93 | 35 | NQI | | 0.24 | 3 | | 72 011 | +28.50 | UTE | LTE | LTE | 103 510 | |
| Bobbin | 93 | 69 | NQI | | 0.33 | 3 | | 103 006 | +30.52 | UTE | UTE | UTE | 2 510 | |
| Bobbin | 93 | 70 | NQI | | 0.32 | 3 | | 104 006 | +36.22 | LTE | UTE | UTE | 2 510 | |
| Bobbin | 93 | 88 | NQI | | 0.20 | 3 | | 107 011 | +18.88 to +26.41 | UTE | LTE | LTE | 125 510 | |
| Bobbin | 93 | 91 | NQI | | 0.43 | 3 | | 98 010 | +7.91 | UTE | LTE | LTE | 124 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 25 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|-------|-----|----------|------------------|---------|-----|-------|---------|----------|
| Bobbin | | | | | NQI | 0.61 | 3 | 100 011 | +14.91 to +25.72 | UTE | LTE | LTE | 124 510 | |
| Bobbin | 93 | 103 | | | NQI | 0.28 | 3 | 74 009 | +13.54 | UTE | LTE | LTE | 159 510 | |
| Bobbin | 93 | 113 | | | NQI | 0.25 | 3 | 68 008 | +7.04 | UTE | LTE | LTE | 142 510 | |
| Bobbin | | | | | NQI | 0.37 | 3 | 109 008 | +5.96 | UTE | LTE | LTE | 142 510 | |
| Bobbin | | | | | NQI | 0.48 | 3 | 89 003 | +26.39 | UTE | LTE | LTE | 142 510 | |
| Bobbin | 93 | 115 | | | NQI | 0.28 | 3 | 96 015 | +26.56 | UTE | LTE | LTE | 142 510 | |
| Bobbin | 93 | 123 | | | NQI | 1.90 | 3 | 103 009 | +1.04 | UTE | LTE | LTE | 142 510 | |
| Bobbin | | | | | NQI | 0.99 | P 1 | 94 009 | +0.61 | UTE | LTE | LTE | 142 510 | |
| Bobbin | | | | | NQI | 1.49 | P 1 | 104 011 | -0.75 | UTE | LTE | LTE | 142 510 | |
| Bobbin | 93 | 124 | | | NQI | 0.22 | P 1 | 69 012 | -0.33 | UTE | LTE | LTE | 157 510 | |
| Bobbin | 94 | 1 | | | NQI | 0.41 | P 1 | 132 010 | -0.38 | 014 | LTE | LTE | 146 510 | |
| Bobbin | 94 | 2 | | | NQI | 0.24 | P 1 | 98 011 | -0.52 | 014 | LTE | LTE | 145 510 | |
| Bobbin | | | | | NQI | 0.50 | P 1 | 108 012 | -0.76 | 014 | LTE | LTE | 145 510 | |
| Bobbin | | | | | NQI | 1.15 | P 1 | 92 011 | +0.63 | 014 | LTE | LTE | 145 510 | |
| Bobbin | 94 | 26 | | | NQI | 0.73 | P 1 | 59 014 | +0.69 | UTE | LTE | LTE | 75 510 | |
| Bobbin | 94 | 59 | | | NQI | 0.44 | 3 | 112 008 | +8.45 | UTE | LTE | LTE | 139 510 | |
| Bobbin | 94 | 74 | | | NQI | 0.30 | 3 | 99 LTS | +43.36 | LTE | UTE | UTE | 2 510 | |
| Bobbin | | | | | NQI | 0.38 | 3 | 99 LTS | +10.17 | LTE | UTE | UTE | 2 510 | |
| Bobbin | 94 | 83 | | | NQI | 0.29 | 3 | 111 014 | +17.70 | UTE | LTE | LTE | 125 510 | |
| Bobbin | 94 | 88 | | | NQI | 0.21 | 3 | 108 009 | +37.02 | UTE | LTE | LTE | 125 510 | |
| Bobbin | | | | | NQI | 0.30 | 3 | 105 011 | +1.58 | UTE | LTE | LTE | 125 510 | |
| Bobbin | | | | | NQI | 0.32 | 3 | 109 009 | +36.03 | UTE | LTE | LTE | 125 510 | |
| Bobbin | | | | | NQI | 0.38 | 3 | 113 007 | +9.76 | UTE | LTE | LTE | 125 510 | |
| Bobbin | | | | | NQI | 0.60 | 3 | 104 010 | +1.29 to +34.75 | UTE | LTE | LTE | 125 510 | |
| Bobbin | 94 | 90 | | | NQI | 0.30 | 3 | 82 009 | +36.04 | UTE | LTE | LTE | 125 510 | |
| Bobbin | | | | | NQI | 0.38 | 3 | 107 009 | +37.76 | UTE | LTE | LTE | 125 510 | |
| Bobbin | | | | | NQI | 0.41 | 3 | 102 010 | +19.46 | UTE | LTE | LTE | 125 510 | |
| Bobbin | 94 | 112 | | | NQI | 0.50 | P 1 | 77 015 | +0.77 | UTE | LTE | LTE | 142 510 | |
| Bobbin | 94 | 122 | | | NQI | 0.34 | 3 | 106 014 | +1.30 | UTE | LTE | LTE | 142 510 | |
| Bobbin | 94 | 124 | | | NQI | 0.50 | 3 | 62 001 | +10.34 | UTE | LTE | LTE | 142 510 | |
| Bobbin | | | | | NQI | 0.64 | 3 | 97 008 | +18.58 | UTE | LTE | LTE | 142 510 | |
| Bobbin | 94 | 125 | | | NQI | 0.40 | 3 | 126 008 | +7.75 | UTE | LTE | LTE | 141 510 | |
| Bobbin | 94 | 127 | | | NQI | 0.85 | 3 | 67 009 | +1.40 | UTE | LTE | LTE | 142 510 | |
| Bobbin | 95 | 17 | | | NQI | 0.26 | 3 | 88 013 | +6.63 | UTE | LTE | LTE | 74 510 | |
| Bobbin | 95 | 69 | | | NQI | 0.48 | 3 | 73 014 | +24.23 | UTE | LTE | LTE | 152 510 | |
| Bobbin | 95 | 78 | | | NQI | 0.22 | 3 | 122 015 | +23.17 | UTE | LTE | LTE | 151 510 | |
| Bobbin | 95 | 102 | | | NQI | 0.37 | 3 | 74 LTS | +31.15 | UTE | LTE | LTE | 137 510 | |
| Bobbin | 95 | 112 | | | NQI | 0.48 | 3 | 89 011 | +32.08 | UTE | LTE | LTE | 137 510 | |
| Bobbin | 95 | 115 | | | NQI | 0.39 | 3 | 78 001 | +30.09 | UTE | LTE | LTE | 138 510 | |
| Bobbin | 95 | 117 | | | NQI | 0.56 | 3 | 56 014 | +10.28 | UTE | LTE | LTE | 138 510 | |
| Bobbin | 95 | 125 | | | NQI | 0.56 | 3 | 89 012 | +26.25 | UTE | LTE | LTE | 138 510 | |
| Bobbin | 95 | 126 | | | NQI | 0.32 | 3 | 98 007 | +38.01 | UTE | LTE | LTE | 137 510 | |
| Bobbin | 95 | 128 | | | NQI | 0.69 | P 1 | 101 014 | +0.79 | UTE | LTE | LTE | 138 510 | |
| Bobbin | 96 | 4 | | | NQI | 0.41 | P 1 | 110 004 | -0.76 | UTE | LTE | LTE | 75 510 | |
| Bobbin | 96 | 25 | | | NQI | 0.37 | 3 | 108 014 | +4.41 | UTE | LTE | LTE | 75 510 | |
| Bobbin | 96 | 39 | | | NQI | 0.30 | 3 | 96 007 | +20.70 | UTE | LTE | LTE | 104 510 | |
| Bobbin | 96 | 46 | | | NQI | 0.26 | 3 | 73 011 | +9.21 | UTE | LTE | LTE | 103 510 | |
| Bobbin | 96 | 48 | | | NQI | 0.30 | 3 | 107 010 | +5.59 | UTE | LTE | LTE | 103 510 | |
| Bobbin | 96 | 63 | | | NQI | 0.39 | 3 | 96 014 | +10.32 | UTE | LTE | LTE | 140 510 | |
| Bobbin | 96 | 82 | | | DWI | 1.01 | P 1 | 92 LTS | -0.06 | UTE | LTE | LTE | 158 510 | |
| Bobbin | 96 | 87 | | | NQI | 0.39 | 3 | 82 011 | +6.29 | UTE | LTE | LTE | 124 510 | |
| Bobbin | | | | | NQI | 0.41 | 3 | 83 011 | +5.31 | UTE | LTE | LTE | 124 510 | |
| Bobbin | 96 | 100 | | | NQI | 0.29 | 3 | 74 007 | +9.40 | UTE | LTE | LTE | 137 510 | |
| Bobbin | 96 | 106 | | | NQI | 0.28 | 3 | 82 013 | +23.59 | UTE | LTE | LTE | 137 510 | |
| Bobbin | 96 | 115 | | | NQI | 0.25 | 3 | 111 005 | +27.31 | UTE | LTE | LTE | 138 510 | |
| Bobbin | 96 | 119 | | | NQI | 0.51 | 3 | 114 009 | +1.25 | UTE | LTE | LTE | 138 510 | |
| Bobbin | 96 | 127 | | | NQI | 0.34 | P 1 | 81 UTS | +0.39 | UTE | LTE | LTE | 138 510 | |
| Bobbin | | | | | NQI | 0.86 | P 1 | 92 014 | +0.86 | UTE | LTE | LTE | 138 510 | |
| Bobbin | 97 | 2 | | | NQI | 0.70 | P 1 | 110 006 | +0.91 | UTE | LTE | LTE | 74 510 | |
| Bobbin | | | | | NQI | 0.70 | P 1 | 116 010 | +0.56 | UTE | LTE | LTE | 74 510 | |
| Bobbin | 97 | 4 | | | NQI | 0.44 | P 1 | 109 009 | -0.61 | UTE | LTE | LTE | 74 510 | |
| Bobbin | 97 | 14 | | | ADI | 15.81 | 6 | 89 013 | +19.11 | UTE | LTE | LTE | 74 510 | |
| Bobbin | 97 | 31 | | | NQI | 0.49 | 3 | 90 014 | +10.25 | UTE | LTE | LTE | 75 510 | |
| Bobbin | 97 | 33 | | | NQI | 0.44 | 3 | 103 013 | +4.71 | UTE | LTE | LTE | 104 510 | |
| Bobbin | 97 | 60 | | | NQI | 0.39 | 3 | 101 009 | +34.45 | UTE | LTE | LTE | 139 510 | |

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|----------|-----|-----|----------|--------|-----------|---------|-----|-------|---------|----------|
| Bobbin | 97 | 76 | NQI | | 0.59 3 | | 58 | LTS | +5.96 | | UTE | LTE | LTE | 152 510 | |
| Bobbin | | | NQI | | 0.58 3 | | 67 | LTS | +5.91 | | UTE | LTE | LTE | 159 510 | IDOK |
| Bobbin | 97 | 118 | ODI | 50 | 1.94 P 1 | | 83 | 009 | +0.62 | | UTE | LTE | LTE | 137 510 | |
| Bobbin | 97 | 119 | ODI | 57 | 5.57 P 1 | | 82 | 009 | +0.79 | | UTE | LTE | LTE | 138 510 | |
| Bobbin | 97 | 124 | NQI | | 0.90 3 | | 107 | 008 | +1.15 | | UTE | LTE | LTE | 138 510 | |
| Bobbin | 97 | 126 | NQI | | 0.45 3 | | 91 | 014 | +2.47 | | UTE | LTE | LTE | 138 510 | |
| Bobbin | 98 | 3 | NQI | | 0.65 P 1 | | 102 | 010 | +0.58 | | UTE | LTE | LTE | 71 510 | |
| Bobbin | | | NQI | | 0.47 3 | | 97 | 009 | +11.81 | to +17.30 | UTE | LTE | LTE | 71 510 | |
| Bobbin | 98 | 34 | NQI | | 0.28 3 | | 103 | 011 | +15.12 | | UTE | LTE | LTE | 99 510 | |
| Bobbin | 98 | 62 | DWI | | 1.02 P 1 | | 32 | LTS | -0.09 | | UTE | LTE | LTE | 139 510 | |
| Bobbin | 98 | 91 | NQI | | 0.49 3 | | 60 | 013 | +25.03 | | UTE | LTE | LTE | 124 510 | |
| Bobbin | 98 | 102 | NQI | | 0.26 3 | | 88 | 008 | +28.60 | | UTE | LTE | LTE | 137 510 | |
| Bobbin | 98 | 107 | NQI | | 0.22 3 | | 62 | 012 | +14.62 | | UTE | LTE | LTE | 138 510 | |
| Bobbin | | | NQI | | 0.25 3 | | 86 | 012 | +19.11 | | UTE | LTE | LTE | 138 510 | |
| Bobbin | 98 | 118 | ODI | 33 | 1.17 P 1 | | 90 | 009 | +1.19 | | UTE | LTE | LTE | 137 510 | |
| Bobbin | 98 | 119 | NQI | | 0.29 P 1 | | 82 | 009 | +1.20 | | UTE | LTE | LTE | 138 510 | |
| Bobbin | | | ODI | 34 | 2.62 P 1 | | 92 | 009 | +0.81 | | UTE | LTE | LTE | 138 510 | |
| Bobbin | 98 | 121 | NQI | | 0.62 P 1 | | 88 | 014 | +0.79 | | UTE | LTE | LTE | 138 510 | |
| Bobbin | 98 | 122 | NQI | | 0.61 3 | | 79 | 014 | +1.19 | | UTE | LTE | LTE | 137 510 | |
| Bobbin | 98 | 126 | NQI | | 1.81 3 | | 108 | LTS | +0.94 | | UTE | LTE | LTE | 137 510 | |
| Bobbin | 98 | 127 | NQI | | 0.56 3 | | 110 | LTS | +0.97 | | UTE | LTE | LTE | 138 510 | |
| Bobbin | | | NQI | | 0.81 3 | | 112 | 015 | +17.86 | | UTE | LTE | LTE | 138 510 | |
| Bobbin | 99 | 3 | NQI | | 0.57 3 | | 94 | 009 | +13.19 | | UTE | LTE | LTE | 70 510 | |
| Bobbin | | | NQI | | 0.50 P 1 | | 99 | 010 | +0.62 | | UTE | LTE | LTE | 70 510 | |
| Bobbin | 99 | 11 | NQI | | 0.51 3 | | 98 | LTS | +40.56 | | UTE | LTE | LTE | 71 510 | |
| Bobbin | 99 | 14 | NQI | | 0.82 P 1 | | 103 | 014 | +0.74 | | UTE | LTE | LTE | 70 510 | |
| Bobbin | 99 | 44 | NQI | | 0.33 3 | | 71 | 014 | +18.02 | | UTE | LTE | LTE | 100 510 | |
| Bobbin | 99 | 53 | NQI | | 0.50 P 1 | | 92 | 014 | -0.17 | | UTE | LTE | LTE | 99 510 | |
| Bobbin | 99 | 56 | NQI | | 0.47 3 | | 106 | 010 | +32.15 | | UTE | LTE | LTE | 139 510 | |
| Bobbin | 99 | 60 | NQI | | 0.35 3 | | 87 | 006 | +1.98 | | UTE | LTE | LTE | 139 510 | |
| Bobbin | 99 | 93 | NQI | | 0.49 3 | | 98 | 013 | +12.63 | | UTE | LTE | LTE | 124 510 | |
| Bobbin | 99 | 97 | NQI | | 0.45 3 | | 87 | LTS | +33.16 | | UTE | LTE | LTE | 137 510 | |
| Bobbin | 99 | 106 | NQI | | 0.66 3 | | 127 | 007 | +8.38 | | UTE | LTE | LTE | 138 510 | |
| Bobbin | 99 | 124 | NQI | | 0.71 3 | | 70 | 008 | +1.36 | | UTE | LTE | LTE | 138 510 | |
| Bobbin | 99 | 126 | NQI | | 0.29 3 | | 106 | LTS | +0.87 | | UTE | LTE | LTE | 138 510 | |
| Bobbin | 100 | 7 | NQI | | 0.41 3 | | 77 | 010 | +4.52 | | UTE | LTE | LTE | 71 510 | |
| Bobbin | 100 | 49 | NQI | | 0.36 3 | | 96 | 006 | +29.59 | | UTE | LTE | LTE | 100 510 | |
| Bobbin | 100 | 50 | NQI | | 0.35 3 | | 82 | 011 | +23.02 | | UTE | LTE | LTE | 99 510 | |
| Bobbin | 100 | 51 | ADI | | 1.10 6 | | 91 | LTS | +26.39 | | UTE | LTE | LTE | 100 510 | |
| Bobbin | | | ADI | | 1.77 6 | | 83 | LTS | +24.48 | | UTE | LTE | LTE | 100 510 | |
| Bobbin | 100 | 65 | NQI | | 0.50 3 | | 87 | 007 | +32.07 | | UTE | LTE | LTE | 151 510 | |
| Bobbin | | | NQI | | 0.54 3 | | 94 | 007 | +32.25 | | UTE | LTE | LTE | 159 510 | IDOK |
| Bobbin | 100 | 72 | NQI | | 0.52 P 1 | | 72 | 004 | -0.26 | | UTE | LTE | LTE | 152 510 | |
| Bobbin | | | NQI | | 0.50 P 1 | | 70 | 004 | -0.34 | | UTE | LTE | LTE | 159 510 | IDOK |
| Bobbin | 100 | 73 | NQI | | 0.29 3 | | 107 | 002 | +31.44 | | UTE | LTE | LTE | 151 510 | |
| Bobbin | | | NQI | | 0.34 3 | | 72 | 002 | +31.50 | | UTE | LTE | LTE | 159 510 | IDOK |
| Bobbin | 100 | 121 | NQI | | 0.32 3 | | 76 | 013 | +12.25 | | UTE | LTE | LTE | 137 510 | |
| Bobbin | 101 | 6 | NQI | | 0.39 3 | | 91 | 008 | +22.50 | | UTE | LTE | LTE | 71 510 | |
| Bobbin | 101 | 16 | NQI | | 0.41 3 | | 108 | 009 | +20.16 | | UTE | LTE | LTE | 70 510 | |
| Bobbin | 101 | 33 | NQI | | 0.37 3 | | 78 | 012 | +1.41 | | UTE | LTE | LTE | 100 510 | |
| Bobbin | 101 | 37 | NQI | | 0.32 3 | | 92 | LTS | +27.63 | | UTE | LTE | LTE | 100 510 | |
| Bobbin | 101 | 55 | NQI | | 0.24 3 | | 92 | 015 | +6.25 | | UTE | LTE | LTE | 139 510 | |
| Bobbin | 101 | 66 | NQI | | 0.33 3 | | 94 | 006 | +26.70 | | UTE | LTE | LTE | 158 510 | |
| Bobbin | 101 | 92 | NQI | | 0.28 3 | | 92 | LTS | +21.96 | to +24.11 | UTE | LTE | LTE | 124 510 | |
| Bobbin | 101 | 98 | NQI | | 0.29 3 | | 85 | 008 | +8.39 | | UTE | LTE | LTE | 138 510 | |
| Bobbin | 101 | 123 | NQI | | 0.34 P 1 | | 100 | 010 | +0.40 | | UTE | LTE | LTE | 137 510 | |
| Bobbin | 101 | 124 | NQI | | 0.49 P 1 | | 89 | 009 | -0.31 | | UTE | LTE | LTE | 138 510 | |
| Bobbin | 102 | 10 | NQI | | 0.37 3 | | 106 | 012 | +35.09 | | UTE | LTE | LTE | 70 510 | |
| Bobbin | 102 | 12 | ODI | 15 | 2.13 P 1 | | 102 | 014 | +0.76 | | UTE | LTE | LTE | 70 510 | |
| Bobbin | 102 | 14 | NQI | | 0.23 3 | | 109 | 014 | +9.03 | | UTE | LTE | LTE | 70 510 | |
| Bobbin | | | NQI | | 0.32 3 | | 93 | 014 | +20.93 | | UTE | LTE | LTE | 70 510 | |
| Bobbin | 102 | 49 | NQI | | 0.25 3 | | 97 | 012 | +11.18 | | UTE | LTE | LTE | 100 510 | |
| Bobbin | 102 | 61 | NQI | | 0.31 3 | | 119 | 015 | +30.11 | | UTE | LTE | LTE | 152 510 | |
| Bobbin | 102 | 69 | DWI | | 1.01 P 1 | | 93 | LTS | -0.06 | | UTE | LTE | LTE | 158 510 | |
| Bobbin | 102 | 72 | NQI | | 0.43 3 | | 88 | 006 | +23.86 | | UTE | LTE | LTE | 158 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 27 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|------|-------|-----|-----|------------------|---------|---------|-----|-------|-------|----------|
| Bobbin | 102 | 102 | NQI | 0.23 | 3 | 95 | 014 | +20.32 | UTE | LTE | LTE | 137 | 510 | |
| Bobbin | 102 | 105 | NQI | 0.53 | 3 | 84 | 004 | +26.82 | UTE | LTE | LTE | 137 | 510 | |
| Bobbin | 102 | 109 | NQI | 0.39 | 3 | 85 | 012 | +5.06 | UTE | LTE | LTE | 137 | 510 | |
| Bobbin | | | NQI | 0.42 | 3 | 86 | LTS | +19.69 | UTE | LTE | LTE | 137 | 510 | |
| Bobbin | 102 | 113 | NQI | 0.25 | 3 | 90 | 011 | +29.71 | UTE | LTE | LTE | 137 | 510 | |
| Bobbin | 103 | 3 | NQI | 1.63 | P 1 | 101 | 010 | +0.62 | UTE | LTE | LTE | 71 | 510 | |
| Bobbin | 103 | 13 | NQI | 1.56 | 3 | 108 | LTS | +21.75 to +29.95 | UTE | LTE | LTE | 70 | 510 | |
| Bobbin | 103 | 21 | NQI | 0.21 | 3 | 93 | 011 | +2.31 | UTE | LTE | LTE | 70 | 510 | |
| Bobbin | 103 | 51 | NQI | 0.26 | 3 | 101 | 008 | +35.38 | UTE | LTE | LTE | 96 | 510 | |
| Bobbin | | | NQI | 0.27 | 3 | 78 | 008 | +24.06 | UTE | LTE | LTE | 96 | 510 | |
| Bobbin | 103 | 53 | NQI | 0.37 | 3 | 100 | LTS | +10.12 | UTE | LTE | LTE | 96 | 510 | |
| Bobbin | 103 | 60 | NQI | 0.27 | P 1 | 101 | LTS | -0.71 | UTE | LTE | LTE | 139 | 510 | |
| Bobbin | 103 | 72 | NQI | 0.61 | 3 | 92 | 004 | +9.57 | UTE | LTE | LTE | 152 | 510 | |
| Bobbin | | | NQI | 0.40 | 3 | 119 | 004 | +9.70 | UTE | LTE | LTE | 158 | 510 | IDOK |
| Bobbin | 103 | 104 | NQI | 0.52 | 3 | 96 | 002 | +34.17 | UTE | LTE | LTE | 137 | 510 | |
| Bobbin | 103 | 111 | NQI | 0.75 | P 1 | 104 | 013 | +0.84 | UTE | LTE | LTE | 138 | 510 | |
| Bobbin | 103 | 117 | NQI | 0.34 | 3 | 75 | 010 | +3.37 | UTE | LTE | LTE | 138 | 510 | |
| Bobbin | 103 | 123 | NQI | 0.33 | 3 | 124 | 012 | +16.52 | UTE | LTE | LTE | 137 | 510 | |
| Bobbin | 104 | 14 | NQI | 0.34 | 3 | 109 | 014 | +29.51 | UTE | LTE | LTE | 71 | 510 | |
| Bobbin | 104 | 20 | NQI | 0.34 | 3 | 48 | 002 | +15.00 | UTE | LTE | LTE | 71 | 510 | |
| Bobbin | | | NQI | 0.53 | P 1 | 42 | LTE | +20.05 | UTE | LTE | LTE | 71 | 510 | |
| Bobbin | 104 | 56 | NQI | 0.35 | 3 | 84 | 006 | +30.53 | UTE | LTE | LTE | 139 | 510 | |
| Bobbin | 104 | 74 | NQI | 0.32 | 3 | 98 | 015 | +22.81 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | 104 | 86 | NQI | 0.29 | 3 | 85 | 015 | +7.26 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | 104 | 102 | NQI | 0.54 | 3 | 102 | 012 | +21.17 | UTE | LTE | LTE | 137 | 510 | |
| Bobbin | 104 | 112 | NQI | 0.80 | P 1 | 92 | 015 | +0.08 | UTE | LTE | LTE | 137 | 510 | |
| Bobbin | | | NQI | 0.89 | P 1 | 108 | 015 | +0.42 | UTE | LTE | LTE | 137 | 510 | |
| Bobbin | 104 | 120 | NQI | 1.86 | P 1 | 92 | 009 | -0.71 | UTE | LTE | LTE | 138 | 510 | |
| Bobbin | 104 | 122 | NQI | 0.53 | P 1 | 105 | 010 | -0.59 | UTE | LTE | LTE | 138 | 510 | |
| Bobbin | 104 | 123 | NQI | 0.66 | 3 | 124 | 015 | +17.16 | UTE | LTE | LTE | 138 | 510 | |
| Bobbin | 105 | 17 | NQI | 4.80 | 3 | 116 | LTS | +21.53 to +30.05 | UTE | LTE | LTE | 71 | 510 | |
| Bobbin | 105 | 35 | NQI | 0.39 | 3 | 101 | 009 | +5.83 | UTE | LTE | LTE | 96 | 510 | |
| Bobbin | 105 | 103 | NQI | 0.41 | 3 | 58 | 015 | +37.00 | UTE | LTE | LTE | 131 | 510 | |
| Bobbin | 105 | 105 | NQI | 0.63 | 3 | 87 | 015 | +15.43 | UTE | LTE | LTE | 131 | 510 | |
| Bobbin | 105 | 108 | NQI | 0.27 | 3 | 111 | 010 | +11.52 | UTE | LTE | LTE | 134 | 510 | |
| Bobbin | 106 | 84 | NQI | 0.30 | 3 | 97 | 009 | +27.96 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | 106 | 105 | NQI | 0.35 | 3 | 102 | 011 | +14.68 | UTE | LTE | LTE | 134 | 510 | |
| Bobbin | 106 | 110 | NQI | 0.22 | P 1 | 83 | 015 | +0.00 | UTE | LTE | LTE | 131 | 510 | |
| Bobbin | 107 | 13 | NQI | 0.18 | 3 | 76 | 015 | +15.15 | UTE | LTE | LTE | 112 | 510 | |
| Bobbin | 107 | 45 | NQI | 0.25 | P 1 | 108 | 007 | -0.44 | UTE | LTE | LTE | 96 | 510 | |
| Bobbin | 107 | 46 | NQI | 0.28 | 3 | 96 | 013 | +3.68 | UTE | LTE | LTE | 95 | 510 | |
| Bobbin | 107 | 48 | NQI | 0.34 | 3 | 72 | 006 | +32.83 | UTE | LTE | LTE | 95 | 510 | |
| Bobbin | | | NQI | 0.35 | 3 | 102 | 007 | +3.96 | UTE | LTE | LTE | 95 | 510 | |
| Bobbin | 107 | 58 | NQI | 1.53 | 3 | 97 | LTS | +4.21 | UTE | LTE | LTE | 139 | 510 | |
| Bobbin | 107 | 61 | NQI | 0.96 | 3 | 100 | 004 | +6.50 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | 107 | 100 | NQI | 0.30 | 3 | 110 | 015 | +41.58 | UTE | LTE | LTE | 134 | 510 | |
| Bobbin | 107 | 104 | NQI | 0.26 | 3 | 90 | 009 | +3.90 | UTE | LTE | LTE | 134 | 510 | |
| Bobbin | 107 | 107 | ODI | 0.31 | 3 | 102 | 011 | +22.52 | UTE | LTE | LTE | 131 | 510 | |
| Bobbin | 107 | 117 | NQI | 0.28 | P 1 | 106 | 010 | -0.12 | UTE | LTE | LTE | 134 | 510 | |
| Bobbin | 107 | 120 | NQI | 0.30 | 3 | 86 | 010 | +10.79 | UTE | LTE | LTE | 131 | 510 | |
| Bobbin | | | NQI | 0.45 | 3 | 85 | 002 | +10.77 | UTE | LTE | LTE | 131 | 510 | |
| Bobbin | 108 | 4 | NQI | 0.28 | 3 | 109 | 015 | +6.61 | UTE | LTE | LTE | 70 | 510 | |
| Bobbin | | | NQI | 0.79 | P 1 | 100 | 009 | -0.65 | UTE | LTE | LTE | 70 | 510 | |
| Bobbin | 108 | 41 | NQI | 0.56 | 3 | 75 | 012 | +8.69 | UTE | LTE | LTE | 96 | 510 | |
| Bobbin | 108 | 42 | NQI | 0.25 | P 1 | 94 | 013 | -0.10 | UTE | LTE | LTE | 95 | 510 | |
| Bobbin | 108 | 91 | NQI | 0.34 | 3 | 95 | 009 | +7.61 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | 108 | 100 | NQI | 0.36 | P 1 | 73 | 010 | -0.15 | UTE | LTE | LTE | 134 | 510 | |
| Bobbin | 108 | 108 | NQI | 0.30 | 3 | 79 | 013 | +15.15 | UTE | LTE | LTE | 134 | 510 | |
| Bobbin | 109 | 9 | NQI | 0.63 | P 1 | 73 | LTE | +17.92 | UTE | LTE | LTE | 71 | 510 | |
| Bobbin | 109 | 50 | NQI | 0.19 | P 1 | 97 | 015 | +0.28 | UTE | LTE | LTE | 95 | 510 | |
| Bobbin | 109 | 54 | NQI | 0.33 | 3 | 97 | 006 | +32.39 | UTE | LTE | LTE | 95 | 510 | |
| Bobbin | | | NQI | 0.45 | 3 | 94 | 012 | +33.59 | UTE | LTE | LTE | 95 | 510 | |
| Bobbin | 109 | 88 | NQI | 0.71 | 3 | 76 | 002 | +13.68 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | 109 | 93 | NQI | 4.99 | 3 | 65 | LTE | +22.73 | UTE | LTE | LTE | 134 | 510 | |
| Bobbin | | | ADI | 9.34 | 6 | 277 | 001 | +12.25 to +20.72 | UTE | LTE | LTE | 134 | 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 28 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS | |
|-----------|-----|------|-----|-----|-------|-----|-----|----------|--------|-----------|---------|-----|---------|--------|----------|--|
| Bobbin | 109 | 94 | NQI | | 0.28 | P 1 | 78 | UTS | +15.60 | UTE | LTE | LTE | 131 510 | | | |
| Bobbin | 109 | 110 | NQI | | 0.23 | 3 | 92 | 010 | +23.20 | UTE | LTE | LTE | 131 510 | | | |
| Bobbin | | | NQI | | 0.29 | 3 | 95 | 010 | +21.92 | UTE | LTE | LTE | 131 510 | | | |
| Bobbin | 109 | 111 | ODI | 65 | 8.96 | P 1 | 74 | 010 | +0.83 | UTE | LTE | LTE | 134 510 | | PLG | |
| Bobbin | 109 | 112 | NQI | | 0.15 | P 1 | 85 | 012 | +0.98 | UTE | LTE | LTE | 131 510 | | | |
| Bobbin | 109 | 113 | NQI | | 0.20 | 3 | 101 | 010 | +28.53 | UTE | LTE | LTE | 134 510 | | | |
| Bobbin | | | NQI | | 0.30 | 3 | 107 | 002 | +27.86 | UTE | LTE | LTE | 134 510 | | | |
| Bobbin | 110 | 50 | NQI | | 0.36 | 3 | 89 | 003 | +28.08 | UTE | LTE | LTE | 93 510 | | | |
| Bobbin | 110 | 55 | NQI | | 0.26 | 3 | 99 | 008 | +4.23 | UTE | LTE | LTE | 89 510 | | | |
| Bobbin | 110 | 58 | NQI | | 0.39 | 3 | 72 | 007 | +8.33 | UTE | LTE | LTE | 139 510 | | | |
| Bobbin | 110 | 86 | NQI | | 0.27 | 3 | 95 | 011 | +16.00 | UTE | LTE | LTE | 119 510 | | | |
| Bobbin | 110 | 105 | NQI | | 0.66 | P 1 | 90 | 014 | +0.90 | UTE | LTE | LTE | 134 510 | | | |
| Bobbin | 110 | 110 | NQI | | 0.25 | 3 | 77 | 010 | +25.07 | UTE | LTE | LTE | 131 510 | | | |
| Bobbin | | | NQI | | 0.25 | 3 | 101 | 008 | +35.86 | UTE | LTE | LTE | 131 510 | | | |
| Bobbin | | | NQI | | 0.26 | 3 | 85 | 011 | +11.58 | UTE | LTE | LTE | 131 510 | | | |
| Bobbin | | | NQI | | 0.29 | 3 | 90 | 010 | +21.22 | UTE | LTE | LTE | 131 510 | | | |
| Bobbin | | | NQI | | 0.31 | 3 | 67 | 008 | +34.17 | UTE | LTE | LTE | 131 510 | | | |
| Bobbin | 110 | 111 | NQI | | 0.85 | P 1 | 87 | 010 | +0.63 | UTE | LTE | LTE | 134 510 | | | |
| Bobbin | | | NQI | | 1.30 | P 1 | 97 | 010 | +0.96 | UTE | LTE | LTE | 134 510 | | | |
| Bobbin | 110 | 112 | ODI | 49 | 1.00 | P 1 | 83 | 010 | +1.02 | UTE | LTE | LTE | 131 510 | | | |
| Bobbin | 111 | 2 | NQI | | 0.19 | 3 | 78 | 011 | +10.51 | UTE | LTE | LTE | 66 510 | | | |
| Bobbin | 111 | 11 | NQI | | 0.30 | 3 | 79 | 002 | +13.98 | UTE | LTE | LTE | 67 510 | | | |
| Bobbin | 111 | 18 | NQI | | 0.20 | 3 | 85 | 007 | +32.72 | UTE | LTE | LTE | 67 510 | | | |
| Bobbin | 111 | 85 | NQI | | 0.61 | P 1 | 123 | UTS | +14.19 | UTE | LTE | LTE | 119 510 | | | |
| Bobbin | 111 | 111 | NQI | | 1.65 | 3 | 108 | 012 | +1.22 | UTE | LTE | LTE | 131 510 | | | |
| Bobbin | 112 | 2 | ODI | 20 | 0.29 | 3 | 104 | 002 | +33.82 | UTE | LTE | LTE | 67 510 | | | |
| Bobbin | 112 | 16 | NQI | | 0.26 | 3 | 88 | 012 | +22.72 | UTE | LTE | LTE | 66 510 | | | |
| Bobbin | 112 | 18 | NQI | | 0.35 | 3 | 89 | 011 | +8.89 | UTE | LTE | LTE | 66 510 | | | |
| Bobbin | 112 | 25 | NQI | | 0.23 | P 1 | 103 | 015 | +0.18 | UTE | LTE | LTE | 67 510 | | | |
| Bobbin | 112 | 112 | NQI | | 0.58 | 3 | 108 | 012 | +1.15 | UTE | LTE | LTE | 131 510 | | | |
| Bobbin | 112 | 116 | NQI | | 0.37 | P 1 | 101 | 014 | -0.87 | UTE | LTE | LTE | 131 510 | | | |
| Bobbin | 113 | 2 | NQI | | 0.27 | 3 | 97 | 012 | +24.36 | UTE | LTE | LTE | 67 510 | | | |
| Bobbin | | | NQI | | 0.25 | 3 | 103 | 010 | +5.70 | to +33.61 | UTE | LTE | LTE | 67 510 | | |
| Bobbin | | | NQI | | 0.32 | 3 | 92 | 011 | +21.30 | to +33.15 | UTE | LTE | LTE | 67 510 | | |
| Bobbin | 113 | 4 | NQI | | 0.75 | P 1 | 126 | 008 | +0.53 | UTE | LTE | LTE | 67 510 | | | |
| Bobbin | 113 | 27 | NQI | | 0.34 | 3 | 93 | 014 | +3.85 | UTE | LTE | LTE | 66 510 | | | |
| Bobbin | 113 | 35 | NQI | | 0.28 | 3 | 81 | 011 | +4.71 | UTE | LTE | LTE | 89 510 | | | |
| Bobbin | 113 | 44 | NQI | | 0.29 | 3 | 83 | 008 | +27.86 | UTE | LTE | LTE | 89 510 | | | |
| Bobbin | 113 | 93 | NQI | | 0.28 | 3 | 108 | 012 | +19.38 | UTE | LTE | LTE | 131 510 | | | |
| Bobbin | 113 | 95 | NQI | | 0.43 | 3 | 100 | 009 | +2.06 | UTE | LTE | LTE | 131 510 | | | |
| Bobbin | 113 | 103 | NQI | | 0.33 | P 1 | 58 | 014 | +0.67 | UTE | LTE | LTE | 131 510 | | | |
| Bobbin | 113 | 107 | ODI | 14 | 0.35 | 3 | 105 | 009 | +35.14 | UTE | LTE | LTE | 131 510 | | | |
| Bobbin | 113 | 111 | NQI | | 0.56 | P 1 | 129 | 012 | -0.61 | UTE | LTE | LTE | 131 510 | | | |
| Bobbin | 113 | 112 | NQI | | 0.30 | P 1 | 64 | 012 | +1.05 | UTE | LTE | LTE | 131 510 | | | |
| Bobbin | 114 | 4 | NQI | | 0.38 | 3 | 106 | 011 | +11.16 | UTE | LTE | LTE | 66 510 | | | |
| Bobbin | 114 | 21 | NQI | | 0.31 | 3 | 86 | 010 | +30.64 | UTE | LTE | LTE | 67 510 | | | |
| Bobbin | 114 | 47 | NQI | | 0.41 | P 1 | 51 | 004 | -0.07 | UTE | LTE | LTE | 151 510 | | | |
| Bobbin | 114 | 52 | NQI | | 0.27 | P 1 | 86 | 014 | +0.29 | UTE | LTE | LTE | 89 510 | | | |
| Bobbin | 114 | 62 | NQI | | 0.48 | 3 | 86 | 015 | +40.18 | UTE | LTE | LTE | 120 510 | | | |
| Bobbin | 114 | 63 | NQI | | 0.30 | 3 | 90 | 006 | +7.96 | UTE | LTE | LTE | 119 510 | | | |
| Bobbin | 114 | 95 | NQI | | 0.35 | 3 | 82 | 015 | +29.54 | UTE | LTE | LTE | 131 510 | | | |
| Bobbin | 114 | 103 | NQI | | 0.35 | P 1 | 105 | 014 | +1.02 | UTE | LTE | LTE | 131 510 | | | |
| Bobbin | 114 | 110 | NQI | | 0.43 | P 1 | 103 | 009 | -0.64 | UTE | LTE | LTE | 159 510 | | | |
| Bobbin | 114 | 114 | NQI | | 0.62 | P 1 | 72 | 010 | +0.70 | UTE | LTE | LTE | 159 510 | | | |
| Bobbin | 114 | 115 | NQI | | 0.29 | 3 | 87 | 015 | +21.68 | UTE | LTE | LTE | 161 510 | | | |
| Bobbin | | | NQI | | 0.30 | 3 | 84 | 015 | +21.75 | UTE | LTE | LTE | 131 510 | | | |
| Bobbin | | | NQI | | 0.63 | 3 | 110 | 010 | +7.86 | UTE | LTE | LTE | 161 510 | | | |
| Bobbin | | | NQI | | 0.85 | 3 | 103 | 010 | +7.84 | UTE | LTE | LTE | 131 510 | | | |
| Bobbin | 115 | 13 | NQI | | 0.22 | 3 | 92 | 015 | +3.34 | UTE | LTE | LTE | 67 510 | | | |
| Bobbin | | | NQI | | 0.20 | P 1 | 68 | 014 | +0.15 | UTE | LTE | LTE | 67 510 | | | |
| Bobbin | 115 | 61 | NQI | | 0.66 | P 1 | 86 | 004 | -0.71 | UTE | LTE | LTE | 24 510 | | | |
| Bobbin | 115 | 66 | NQI | | 0.50 | 3 | 97 | 010 | +26.21 | UTE | LTE | LTE | 24 510 | | | |
| Bobbin | 115 | 70 | NQI | | 0.39 | 3 | 103 | 003 | +24.13 | UTE | LTE | LTE | 24 510 | | | |
| Bobbin | | | NQI | | 0.40 | 3 | 111 | 003 | +30.59 | UTE | LTE | LTE | 24 510 | | | |
| Bobbin | 115 | 102 | NQI | | 0.74 | 3 | 73 | 002 | +10.16 | UTE | LTE | LTE | 153 510 | | | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 29 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|----------|-----|-----|----------|---------|---------|-----|-------|-------|----------|
| Bobbin | 116 | 5 | NQI | | 0.21 3 | | 80 | 011 | +4.85 | UTE | LTE | LTE | 66 | 510 |
| Bobbin | | | NQI | | 0.31 3 | | 87 | 011 | +4.04 | UTE | LTE | LTE | 66 | 510 |
| Bobbin | 116 | 21 | NQI | | 0.58 P 1 | | 99 | 014 | +0.44 | UTE | LTE | LTE | 67 | 510 |
| Bobbin | 116 | 24 | NQI | | 0.30 3 | | 107 | 006 | +37.14 | UTE | LTE | LTE | 66 | 510 |
| Bobbin | 116 | 42 | NQI | | 0.13 P 1 | | 100 | 014 | -0.13 | UTE | LTE | LTE | 55 | 510 |
| Bobbin | 116 | 49 | NQI | | 0.26 3 | | 96 | 015 | +23.35 | UTE | LTE | LTE | 54 | 510 |
| Bobbin | 116 | 52 | NQI | | 0.69 3 | | 96 | 011 | +8.59 | UTE | LTE | LTE | 55 | 510 |
| Bobbin | 116 | 77 | NQI | | 0.37 3 | | 72 | 003 | +21.07 | UTE | LTE | LTE | 23 | 510 |
| Bobbin | 116 | 98 | NQI | | 0.40 3 | | 112 | 007 | +33.91 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | 116 | 104 | NQI | | 0.40 3 | | 93 | 012 | +6.04 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | 116 | 107 | NQI | | 0.45 P 1 | | 101 | 009 | -0.54 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | 116 | 113 | NQI | | 12.98 3 | | 123 | 015 | +21.76 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 117 | 10 | NQI | | 0.31 3 | | 90 | 010 | +5.02 | UTE | LTE | LTE | 67 | 510 |
| Bobbin | 117 | 14 | NQI | | 0.27 3 | | 104 | 001 | +36.51 | UTE | LTE | LTE | 67 | 510 |
| Bobbin | 117 | 16 | NQI | | 0.31 3 | | 109 | 013 | +22.67 | UTE | LTE | LTE | 67 | 510 |
| Bobbin | 117 | 20 | NQI | | 0.49 P 1 | | 85 | 015 | +0.47 | UTE | LTE | LTE | 67 | 510 |
| Bobbin | 117 | 49 | ODI | 19 | 0.70 P 1 | | 91 | 015 | +0.76 | UTE | LTE | LTE | 54 | 510 |
| Bobbin | 117 | 89 | NQI | | 0.58 P 1 | | 93 | 015 | +0.75 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 117 | 90 | NQI | | 1.04 P 1 | | 106 | 015 | +0.76 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | 117 | 97 | NQI | | 0.35 3 | | 62 | 002 | +10.95 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | 117 | 98 | NQI | | 0.28 3 | | 102 | 008 | +34.40 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 117 | 107 | NQI | | 0.39 3 | | 112 | 010 | +19.54 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | 118 | 3 | NQI | | 0.53 P 1 | | 86 | 009 | -0.61 | UTE | LTE | LTE | 67 | 510 |
| Bobbin | 118 | 21 | NQI | | 0.44 3 | | 100 | 010 | +14.27 | UTE | LTE | LTE | 67 | 510 |
| Bobbin | 118 | 47 | NQI | | 0.54 3 | | 65 | 009 | +14.81 | UTE | LTE | LTE | 55 | 510 |
| Bobbin | 118 | 63 | NQI | | 0.22 3 | | 103 | 015 | +16.30 | UTE | LTE | LTE | 23 | 510 |
| Bobbin | 118 | 65 | NQI | | 0.22 3 | | 101 | 008 | +15.03 | UTE | LTE | LTE | 23 | 510 |
| Bobbin | 118 | 67 | NQI | | 0.25 3 | | 104 | 014 | +7.19 | UTE | LTE | LTE | 23 | 510 |
| Bobbin | 118 | 77 | NQI | | 0.30 3 | | 60 | 015 | +30.67 | UTE | LTE | LTE | 23 | 510 |
| Bobbin | 118 | 83 | NQI | | 0.34 3 | | 93 | 008 | +36.74 | UTE | LTE | LTE | 23 | 510 |
| Bobbin | 118 | 90 | NQI | | 0.43 3 | | 127 | 011 | +32.59 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 118 | 100 | NQI | | 0.68 3 | | 72 | 010 | +13.85 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 118 | 101 | NQI | | 0.38 P 1 | | 92 | 009 | -0.65 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | 118 | 105 | NQI | | 0.35 3 | | 92 | 012 | +26.46 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | 118 | 107 | NQI | | 0.63 3 | | 117 | 010 | +12.51 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 119 | 3 | NQI | | 0.54 3 | | 106 | 011 | +36.47 | UTE | LTE | LTE | 66 | 510 |
| Bobbin | | | NQI | | 0.61 3 | | 91 | 011 | +31.96 | UTE | LTE | LTE | 66 | 510 |
| Bobbin | 119 | 19 | NQI | | 0.23 3 | | 86 | 011 | +36.11 | UTE | LTE | LTE | 66 | 510 |
| Bobbin | 119 | 24 | NQI | | 0.42 3 | | 90 | 008 | +6.61 | UTE | LTE | LTE | 55 | 510 |
| Bobbin | 119 | 40 | NQI | | 0.44 3 | | 90 | 006 | +31.78 | UTE | LTE | LTE | 55 | 510 |
| Bobbin | 119 | 45 | NQI | | 0.35 3 | | 93 | 006 | +29.71 | UTE | LTE | LTE | 54 | 510 |
| Bobbin | 119 | 55 | NQI | | 0.50 P 1 | | 83 | 003 | +0.49 | UTE | LTE | LTE | 24 | 510 |
| Bobbin | 119 | 84 | NQI | | 0.27 3 | | 96 | 001 | +7.00 | UTE | LTE | LTE | 23 | 510 |
| Bobbin | 119 | 85 | NQI | | 0.38 3 | | 107 | 013 | +28.60 | UTE | LTE | LTE | 24 | 510 |
| Bobbin | 119 | 107 | NQI | | 0.34 3 | | 106 | 011 | +1.45 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | | | NQI | | 0.40 3 | | 102 | 013 | +21.82 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | | | NQI | | 0.40 3 | | 107 | 013 | +18.53 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | | | NQI | | 0.46 3 | | 101 | 013 | +19.07 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | 120 | 5 | NQI | | 0.35 3 | | 96 | 014 | +33.05 | UTE | LTE | LTE | 67 | 510 |
| Bobbin | 120 | 22 | NQI | | 0.19 3 | | 99 | 011 | +11.05 | UTE | LTE | LTE | 66 | 510 |
| Bobbin | | | NQI | | 0.28 3 | | 81 | 006 | +29.66 | UTE | LTE | LTE | 66 | 510 |
| Bobbin | 120 | 55 | NQI | | 0.35 3 | | 83 | 012 | +5.43 | UTE | LTE | LTE | 24 | 510 |
| Bobbin | | | NQI | | 0.55 3 | | 54 | 011 | +2.52 | UTE | LTE | LTE | 24 | 510 |
| Bobbin | 120 | 58 | NQI | | 0.28 3 | | 81 | 012 | +23.79 | UTE | LTE | LTE | 23 | 510 |
| Bobbin | | | NQI | | 0.39 3 | | 98 | 012 | +23.27 | UTE | LTE | LTE | 23 | 510 |
| Bobbin | 120 | 69 | NQI | | 0.57 3 | | 103 | 003 | +35.98 | UTE | LTE | LTE | 24 | 510 |
| Bobbin | 120 | 71 | NQI | | 0.59 P 1 | | 81 | LTS | -0.31 | UTE | LTE | LTE | 24 | 510 |
| Bobbin | 120 | 106 | NQI | | 0.38 3 | | 121 | 011 | +7.94 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | | | NQI | | 0.39 3 | | 80 | 013 | +28.04 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | | | NQI | | 0.47 3 | | 103 | 011 | +6.57 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | | | NQI | | 0.51 3 | | 95 | 010 | +22.96 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | | | NQI | | 0.55 3 | | 82 | 010 | +23.94 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | 121 | 1 | NQI | | 0.38 P 1 | | 101 | 014 | +33.38 | UTE | LTE | LTE | 67 | 510 |
| Bobbin | 121 | 3 | NQI | | 0.78 P 1 | | 89 | 015 | -1.12 | UTE | LTE | LTE | 67 | 510 |
| Bobbin | 121 | 5 | NQI | | 0.77 P 1 | | 118 | 010 | +0.43 | UTE | LTE | LTE | 67 | 510 |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 30 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|-----|-----|----------|---------|---------|-----|-------|-------|----------|
| Bobbin | 121 | 21 | NQI | | 0.42 | 3 | 82 | 010 | +8.37 | UTE | LTE | LTE | 67 | 510 |
| Bobbin | 121 | 40 | NQI | | 0.31 | 3 | 103 | 004 | +22.23 | UTE | LTE | LTE | 50 | 510 |
| Bobbin | 121 | 42 | NQI | | 0.52 | 3 | 92 | 007 | +34.91 | UTE | LTE | LTE | 50 | 510 |
| Bobbin | 121 | 48 | NQI | | 0.78 | P 1 | 69 | LTS | -0.30 | UTE | LTE | LTE | 50 | 510 |
| Bobbin | 121 | 55 | NQI | | 0.27 | 3 | 98 | 015 | +7.82 | UTE | LTE | LTE | 23 | 510 |
| Bobbin | 121 | 57 | NQI | | 0.30 | 3 | 50 | 007 | +8.09 | UTE | LTE | LTE | 23 | 510 |
| Bobbin | 121 | 66 | NQI | | 0.27 | 3 | 90 | 009 | +6.32 | UTE | LTE | LTE | 23 | 510 |
| Bobbin | 121 | 79 | NQI | | 0.41 | 3 | 93 | 006 | +36.36 | UTE | LTE | LTE | 23 | 510 |
| Bobbin | 121 | 81 | NQI | | 0.39 | 3 | 99 | 006 | +31.74 | UTE | LTE | LTE | 87 | 510 |
| Bobbin | 121 | 87 | NQI | | 0.38 | 3 | 92 | 011 | +16.87 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 121 | 100 | NQI | | 0.34 | 3 | 98 | 012 | +3.96 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | | | NQI | | 0.36 | 3 | 90 | 011 | +30.48 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | | | NQI | | 0.43 | 3 | 106 | 011 | +34.43 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | | | NQI | | 0.49 | 3 | 104 | 011 | +27.89 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | | | NQI | | 0.58 | 3 | 103 | 011 | +28.20 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | 122 | 3 | ODI | 12 | 0.21 | 3 | 107 | 014 | +28.99 | UTE | LTE | LTE | 67 | 510 |
| Bobbin | 122 | 8 | NQI | | 0.33 | 3 | 87 | LTS | +40.06 | UTE | LTE | LTE | 66 | 510 |
| Bobbin | 122 | 18 | NQI | | 0.28 | 3 | 89 | 007 | +24.89 | UTE | LTE | LTE | 67 | 510 |
| Bobbin | 122 | 37 | NQI | | 0.28 | 3 | 128 | LTS | +36.66 | UTE | LTE | LTE | 50 | 510 |
| Bobbin | 122 | 56 | NQI | | 0.26 | 3 | 95 | 007 | +15.54 | UTE | LTE | LTE | 28 | 510 |
| Bobbin | 122 | 77 | NQI | | 0.24 | 3 | 89 | 001 | +15.91 | UTE | LTE | LTE | 28 | 510 |
| Bobbin | 122 | 79 | NQI | | 0.27 | 3 | 95 | 015 | +19.36 | UTE | LTE | LTE | 28 | 510 |
| Bobbin | 122 | 84 | NQI | | 0.22 | 3 | 105 | 011 | +33.66 | UTE | LTE | LTE | 28 | 510 |
| Bobbin | 122 | 85 | NQI | | 0.48 | P 1 | 106 | 003 | -0.81 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | 122 | 92 | NQI | | 0.53 | 3 | 46 | 013 | +24.62 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 122 | 93 | NQI | | 0.25 | 3 | 79 | 011 | +9.98 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | 122 | 94 | NQI | | 0.31 | 3 | 96 | 011 | +5.92 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 122 | 99 | NQI | | 0.30 | 3 | 109 | 008 | +25.66 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | | | NQI | | 0.41 | 3 | 110 | 008 | +27.06 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | 123 | 1 | ADI | | 1.24 | 6 | 47 | 014 | +30.90 | UTE | LTE | LTE | 67 | 510 |
| Bobbin | 123 | 5 | NQI | | 0.34 | 3 | 103 | 002 | +22.11 | UTE | LTE | LTE | 66 | 510 |
| Bobbin | 123 | 29 | NQI | | 0.57 | P 1 | 77 | 015 | +0.53 | UTE | LTE | LTE | 50 | 510 |
| Bobbin | 123 | 55 | NQI | | 0.37 | 3 | 103 | 006 | +31.85 | UTE | LTE | LTE | 28 | 510 |
| Bobbin | | | NQI | | 0.41 | 3 | 113 | 006 | +12.92 | UTE | LTE | LTE | 28 | 510 |
| Bobbin | 123 | 72 | ODI | 11 | 0.28 | 3 | 111 | 007 | +10.67 | UTE | LTE | LTE | 28 | 510 |
| Bobbin | 123 | 102 | NQI | | 0.31 | 3 | 106 | 014 | +11.25 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | | | NQI | | 0.68 | 3 | 101 | 014 | +29.43 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 124 | 1 | NQI | | 0.76 | P 1 | 114 | 015 | +0.26 | UTE | LTE | LTE | 63 | 510 |
| Bobbin | 124 | 2 | NQI | | 0.52 | P 1 | 69 | 015 | -1.16 | UTE | LTE | LTE | 67 | 510 |
| Bobbin | 124 | 4 | NQI | | 0.19 | 3 | 100 | LTS | +32.84 | UTE | LTE | LTE | 63 | 510 |
| Bobbin | | | NQI | | 0.24 | 3 | 96 | LTS | +32.82 | UTE | LTE | LTE | 67 | 510 |
| Bobbin | | | NQI | | 0.74 | P 1 | 106 | 010 | +0.57 | UTE | LTE | LTE | 67 | 510 |
| Bobbin | | | NQI | | 0.83 | P 1 | 107 | 010 | +0.57 | UTE | LTE | LTE | 63 | 510 |
| Bobbin | 124 | 58 | NQI | | 0.47 | 3 | 63 | 012 | +27.55 | UTE | LTE | LTE | 28 | 510 |
| Bobbin | 124 | 60 | NQI | | 0.32 | 3 | 89 | 006 | +22.28 | UTE | LTE | LTE | 28 | 510 |
| Bobbin | 124 | 72 | NQI | | 0.27 | 3 | 108 | 011 | +20.10 | UTE | LTE | LTE | 28 | 510 |
| Bobbin | 124 | 73 | NQI | | 3.65 | 3 | 109 | LTS | +24.31 | UTE | LTE | LTE | 28 | 510 |
| Bobbin | 124 | 85 | NQI | | 0.67 | P 1 | 118 | 003 | -0.83 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | 124 | 93 | NQI | | 1.20 | 3 | 110 | LTS | +24.27 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | 124 | 99 | NQI | | 0.24 | 3 | 95 | 011 | +10.39 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | 125 | 1 | NQI | | 0.34 | 3 | 77 | 001 | +28.76 | UTE | LTE | LTE | 63 | 510 |
| Bobbin | | | NQI | | 0.52 | 3 | 85 | 014 | +30.57 | UTE | LTE | LTE | 63 | 510 |
| Bobbin | 125 | 4 | NQI | | 1.01 | P 1 | 112 | 010 | +0.55 | UTE | LTE | LTE | 63 | 510 |
| Bobbin | 125 | 5 | NQI | | 0.64 | P 1 | 108 | 010 | +0.51 | UTE | LTE | LTE | 63 | 510 |
| Bobbin | 125 | 36 | NQI | | 0.46 | P 1 | 90 | 015 | +0.60 | UTE | LTE | LTE | 51 | 510 |
| Bobbin | 125 | 45 | NQI | | 0.60 | 3 | 38 | 003 | +32.80 | UTE | LTE | LTE | 50 | 510 |
| Bobbin | 125 | 50 | ODI | 11 | 0.56 | 3 | 104 | 010 | +33.09 | UTE | LTE | LTE | 51 | 510 |
| Bobbin | 125 | 51 | NQI | | 0.31 | 3 | 101 | 006 | +12.98 | UTE | LTE | LTE | 28 | 510 |
| Bobbin | 125 | 65 | NQI | | 0.35 | 3 | 61 | 013 | +28.42 | UTE | LTE | LTE | 28 | 510 |
| Bobbin | 125 | 75 | NQI | | 0.24 | 3 | 93 | 009 | +19.49 | UTE | LTE | LTE | 28 | 510 |
| Bobbin | 125 | 80 | NQI | | 0.26 | 3 | 104 | 008 | +18.50 | UTE | LTE | LTE | 28 | 510 |
| Bobbin | 125 | 86 | NQI | | 0.45 | 3 | 102 | 001 | +10.03 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | 125 | 99 | NQI | | 0.43 | 3 | 71 | 010 | +25.03 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | | | NQI | | 0.43 | 3 | 78 | 010 | +24.05 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | | | NQI | | 0.63 | 3 | 92 | 010 | +23.72 | UTE | LTE | LTE | 153 | 510 |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 31 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | *TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|-----|-----|----------|------------------|---------|-----|-------|-------|----------|
| Bobbin | 126 | 1 | NQI | | 0.70 | 3 | 111 | 014 | +33.29 | UTE | LTE | LTE | 63 | 510 |
| Bobbin | 126 | 2 | NQI | | 0.38 | P 1 | 69 | UTS | +11.89 | UTE | LTE | LTE | 63 | 510 |
| Bobbin | 126 | 4 | NQI | | 0.74 | P 1 | 108 | 010 | +0.56 | UTE | LTE | LTE | 116 | 510 |
| Bobbin | 126 | 5 | NQI | | 0.98 | P 1 | 128 | 010 | +0.55 | UTE | LTE | LTE | 63 | 510 |
| Bobbin | 126 | 91 | NQI | | 0.74 | P 1 | 91 | 013 | +0.90 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 126 | 97 | NQI | | 0.32 | P 1 | 126 | 008 | +0.61 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | 127 | 1 | NQI | | 0.83 | 3 | 98 | 014 | +31.12 | UTE | LTE | LTE | 62 | 510 |
| Bobbin | 127 | 2 | NQI | | 0.81 | P 1 | 123 | 015 | -0.37 | UTE | LTE | LTE | 63 | 510 |
| Bobbin | 127 | 3 | NQI | | 0.20 | P 1 | 76 | 013 | +1.11 | UTE | LTE | LTE | 63 | 510 |
| Bobbin | | | NQI | | 1.28 | P 1 | 120 | 015 | -0.37 | UTE | LTE | LTE | 63 | 510 |
| Bobbin | 127 | 5 | NQI | | 1.39 | P 1 | 105 | 010 | +0.59 | UTE | LTE | LTE | 63 | 510 |
| Bobbin | 127 | 7 | NQI | | 0.25 | 3 | 108 | 009 | +22.41 | UTE | LTE | LTE | 63 | 510 |
| Bobbin | 127 | 25 | NQI | | 0.27 | 3 | 90 | 002 | +5.90 | UTE | LTE | LTE | 51 | 510 |
| Bobbin | 127 | 27 | NQI | | 0.30 | 3 | 78 | 012 | +34.83 | UTE | LTE | LTE | 51 | 510 |
| Bobbin | 127 | 30 | NQI | | 0.34 | P 1 | 106 | 014 | +0.47 | UTE | LTE | LTE | 50 | 510 |
| Bobbin | 127 | 65 | NQI | | 0.25 | 3 | 104 | 009 | +4.94 | UTE | LTE | LTE | 28 | 510 |
| Bobbin | | | NQI | | 0.26 | 3 | 98 | 008 | +22.49 | UTE | LTE | LTE | 28 | 510 |
| Bobbin | 127 | 70 | NQI | | 0.33 | 3 | 94 | 006 | +25.66 | UTE | LTE | LTE | 28 | 510 |
| Bobbin | 127 | 75 | NQI | | 0.29 | 3 | 75 | 013 | +24.32 | UTE | LTE | LTE | 28 | 510 |
| Bobbin | | | NQI | | 0.39 | 3 | 98 | 002 | +33.02 | UTE | LTE | LTE | 28 | 510 |
| Bobbin | 127 | 92 | NQI | | 0.55 | P 1 | 115 | 009 | +0.51 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 127 | 98 | NQI | | 0.43 | 3 | 105 | 013 | +23.05 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | | | NQI | | 2.33 | 3 | 120 | 011 | +4.29 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 128 | 4 | NQI | | 0.20 | 3 | 100 | 015 | +10.18 | UTE | LTE | LTE | 63 | 510 |
| Bobbin | | | NQI | | 0.45 | P 1 | 98 | 010 | +0.31 | UTE | LTE | LTE | 63 | 510 |
| Bobbin | 128 | 20 | NQI | | 0.24 | 3 | 81 | 009 | +28.29 | UTE | LTE | LTE | 50 | 510 |
| Bobbin | 128 | 28 | NQI | | 0.23 | 3 | 99 | 015 | +21.99 | UTE | LTE | LTE | 50 | 510 |
| Bobbin | 128 | 35 | ADI | | 2.26 | 6 | 75 | 008 | +36.38 | UTE | LTE | LTE | 51 | 510 |
| Bobbin | 128 | 36 | NQI | | 0.31 | 3 | 84 | 015 | +21.30 | UTE | LTE | LTE | 50 | 510 |
| Bobbin | 128 | 42 | NQI | | 0.43 | 3 | 93 | 015 | +40.79 | UTE | LTE | LTE | 50 | 510 |
| Bobbin | 128 | 74 | NQI | | 0.33 | 3 | 69 | 014 | +33.49 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | 129 | 1 | NQI | | 0.29 | 3 | 111 | 015 | +4.43 | UTE | LTE | LTE | 58 | 510 |
| Bobbin | 129 | 5 | NQI | | 0.25 | 3 | 81 | LTS | +16.49 | UTE | LTE | LTE | 59 | 510 |
| Bobbin | 129 | 15 | NQI | | 0.29 | 3 | 86 | 014 | +12.78 | UTE | LTE | LTE | 58 | 510 |
| Bobbin | 129 | 25 | ODI | 25 | 0.82 | P 1 | 96 | 015 | -0.93 | UTE | LTE | LTE | 51 | 510 |
| Bobbin | 129 | 27 | NQI | | 0.33 | P 1 | 115 | 003 | -0.74 | UTE | LTE | LTE | 51 | 510 |
| Bobbin | 129 | 28 | NQI | | 0.19 | 3 | 87 | 001 | +19.50 | UTE | LTE | LTE | 50 | 510 |
| Bobbin | 129 | 55 | NQI | | 0.32 | 3 | 63 | 015 | +9.21 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | 129 | 59 | NQI | | 0.22 | P 1 | 113 | 004 | -0.36 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | 129 | 63 | NQI | | 0.25 | 3 | 72 | 012 | +15.91 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | 129 | 76 | NQI | | 0.33 | 3 | 98 | 014 | +1.28 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | 129 | 86 | NQI | | 0.26 | 3 | 116 | 015 | +25.58 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 129 | 91 | NQI | | 0.40 | P 1 | 117 | 005 | -0.77 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | 129 | 92 | NQI | | 0.58 | 3 | 103 | 011 | +6.87 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | | | NQI | | 0.37 | 3 | 108 | 012 | +9.00 to +11.00 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 129 | 94 | NQI | | 0.31 | 3 | 88 | 010 | +29.83 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 130 | 1 | NQI | | 2.65 | 3 | 116 | 013 | +3.08 | UTE | LTE | LTE | 59 | 510 |
| Bobbin | 130 | 2 | NQI | | 0.55 | 3 | 113 | 011 | +6.51 | UTE | LTE | LTE | 58 | 510 |
| Bobbin | 130 | 4 | NQI | | 0.72 | P 1 | 119 | 010 | +0.53 | UTE | LTE | LTE | 59 | 510 |
| Bobbin | 130 | 6 | NQI | | 0.52 | P 1 | 80 | 010 | +0.60 | UTE | LTE | LTE | 59 | 510 |
| Bobbin | 130 | 11 | NQI | | 0.37 | 3 | 76 | 011 | +19.32 | UTE | LTE | LTE | 59 | 510 |
| Bobbin | 130 | 16 | NQI | | 0.29 | 3 | 87 | 009 | +9.05 | UTE | LTE | LTE | 51 | 510 |
| Bobbin | 130 | 26 | NQI | | 0.36 | P 1 | 100 | 014 | +0.39 | UTE | LTE | LTE | 51 | 510 |
| Bobbin | 130 | 41 | NQI | | 0.44 | 3 | 87 | 011 | +6.25 | UTE | LTE | LTE | 50 | 510 |
| Bobbin | | | NQI | | 0.46 | 3 | 106 | 011 | +1.75 | UTE | LTE | LTE | 50 | 510 |
| Bobbin | 130 | 50 | NQI | | 0.37 | 3 | 83 | 007 | +11.47 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | 130 | 60 | NQI | | 0.26 | 3 | 100 | 001 | +2.46 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | 130 | 69 | NQI | | 0.24 | 3 | 92 | 008 | +6.23 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | 130 | 78 | NQI | | 0.33 | 3 | 109 | 003 | +35.93 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | 130 | 90 | NQI | | 0.33 | 3 | 86 | 002 | +26.39 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 130 | 93 | NQI | | 0.33 | 3 | 105 | 010 | +33.25 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | | | NQI | | 0.32 | 3 | 85 | 010 | +23.50 to +26.50 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 131 | 1 | NQI | | 0.29 | 3 | 130 | 013 | +1.11 | UTE | LTE | LTE | 59 | 510 |
| Bobbin | 131 | 2 | NQI | | 0.36 | P 1 | 89 | 015 | -0.25 | UTE | LTE | LTE | 58 | 510 |
| Bobbin | 131 | 5 | NQI | | 0.67 | P 1 | 98 | 009 | +0.31 | UTE | LTE | LTE | 59 | 510 |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 32 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|------|-------|-----|-----|------------------|---------|---------|-----|-------|-------|----------|
| Bobbin | 131 | 13 | NQI | 0.19 | P 1 | 75 | 010 | +0.95 | UTE | LTE | LTE | 59 | 510 | |
| Bobbin | 131 | 36 | NQI | 0.38 | P 1 | 100 | 014 | +0.96 | UTE | LTE | LTE | 51 | 510 | |
| Bobbin | 131 | 68 | NQI | 0.23 | 3 | 90 | 010 | +30.77 | UTE | LTE | LTE | 30 | 510 | |
| Bobbin | | | NQI | 0.25 | 3 | 91 | 010 | +19.63 | UTE | LTE | LTE | 30 | 510 | |
| Bobbin | | | NQI | 0.32 | 3 | 97 | 010 | -1.28 | UTE | LTE | LTE | 30 | 510 | |
| Bobbin | | | NQI | 0.59 | 3 | 80 | 015 | +14.71 | UTE | LTE | LTE | 30 | 510 | |
| Bobbin | 131 | 69 | NQI | 0.63 | 3 | 114 | 008 | +1.34 | UTE | LTE | LTE | 30 | 510 | |
| Bobbin | 131 | 80 | NQI | 0.49 | 3 | 63 | 011 | +35.34 | UTE | LTE | LTE | 153 | 510 | |
| Bobbin | 131 | 83 | NQI | 0.35 | 3 | 109 | 009 | +35.60 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | | | NQI | 0.38 | 3 | 97 | 010 | +9.13 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | | | NQI | 0.40 | 3 | 100 | 012 | +15.88 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | 131 | 87 | NQI | 0.43 | 3 | 105 | 010 | +28.71 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | | | NQI | 0.42 | 3 | 92 | 010 | +7.00 to +12.00 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | 131 | 90 | NQI | 0.47 | 3 | 109 | 011 | +18.08 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | | | NQI | 0.50 | P 1 | 119 | 007 | -0.63 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | | | NQI | 0.40 | 3 | 99 | 011 | +23.00 to +35.00 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | | | NQI | 0.41 | 3 | 111 | 012 | +6.00 to +12.50 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | 132 | 1 | NQI | 0.30 | P 1 | 82 | 015 | -0.27 | UTE | LTE | LTE | 59 | 510 | |
| Bobbin | 132 | 29 | NQI | 0.41 | 3 | 107 | 010 | +14.82 | UTE | LTE | LTE | 51 | 510 | |
| Bobbin | 132 | 41 | NQI | 0.47 | P 1 | 87 | LTS | -0.33 | UTE | LTE | LTE | 50 | 510 | |
| Bobbin | 132 | 61 | NQI | 0.23 | 3 | 77 | 008 | +34.52 | UTE | LTE | LTE | 30 | 510 | |
| Bobbin | 132 | 74 | NQI | 0.33 | 3 | 77 | 015 | +4.87 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | 132 | 75 | NQI | 0.58 | 3 | 99 | 008 | +11.33 | UTE | LTE | LTE | 153 | 510 | |
| Bobbin | 132 | 80 | NQI | 1.37 | P 1 | 97 | 008 | -0.72 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | 132 | 82 | NQI | 0.43 | P 1 | 123 | 009 | -0.51 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | | | NQI | 1.05 | P 1 | 86 | 009 | +0.69 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | | | NQI | 0.42 | 3 | 108 | 010 | +9.30 to +16.69 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | 132 | 83 | NQI | 0.66 | P 1 | 119 | 010 | +0.68 | UTE | LTE | LTE | 153 | 510 | |
| Bobbin | 132 | 84 | NQI | 0.24 | 3 | 77 | 011 | +19.22 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | | | NQI | 0.25 | 3 | 99 | 011 | +22.85 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | | | NQI | 0.31 | 3 | 94 | 011 | +16.22 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | | | NQI | 0.31 | 3 | 107 | 010 | +23.13 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | | | NQI | 0.36 | 3 | 102 | 011 | +22.30 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | | | NQI | 0.44 | 3 | 108 | 011 | +25.27 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | | | NQI | 0.45 | 3 | 97 | 012 | +22.87 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | 132 | 85 | NQI | 0.30 | 3 | 97 | 011 | +3.50 to +7.50 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | 133 | 1 | NQI | 0.51 | 3 | 115 | 014 | +33.64 | UTE | LTE | LTE | 59 | 510 | |
| Bobbin | 133 | 14 | NQI | 0.43 | P 1 | 93 | 004 | -0.71 | UTE | LTE | LTE | 48 | 510 | |
| Bobbin | 133 | 26 | NQI | 0.17 | 3 | 95 | 010 | +33.33 | UTE | LTE | LTE | 50 | 510 | |
| Bobbin | 133 | 57 | NQI | 0.55 | P 1 | 96 | LTS | -0.41 | UTE | LTE | LTE | 30 | 510 | |
| Bobbin | 133 | 66 | NQI | 0.25 | 3 | 80 | 015 | +25.68 | UTE | LTE | LTE | 30 | 510 | |
| Bobbin | 133 | 82 | NQI | 0.30 | 3 | 97 | 009 | +37.11 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | | | NQI | 0.37 | 3 | 101 | 010 | +34.41 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | 133 | 83 | NQI | 0.38 | 3 | 94 | 014 | +4.23 | UTE | LTE | LTE | 153 | 510 | |
| Bobbin | 133 | 85 | NQI | 0.34 | 3 | 108 | 010 | +30.39 | UTE | LTE | LTE | 153 | 510 | |
| Bobbin | 134 | 1 | NQI | 0.33 | P 1 | 96 | 013 | +0.73 | UTE | LTE | LTE | 59 | 510 | |
| Bobbin | 134 | 28 | NQI | 0.28 | 3 | 90 | 011 | +5.57 | UTE | LTE | LTE | 49 | 510 | |
| Bobbin | | | NQI | 0.30 | 3 | 110 | 011 | +28.34 | UTE | LTE | LTE | 49 | 510 | |
| Bobbin | | | NQI | 0.31 | 3 | 93 | 012 | +10.35 | UTE | LTE | LTE | 49 | 510 | |
| Bobbin | 134 | 32 | NQI | 0.29 | 3 | 100 | 007 | +18.43 | UTE | LTE | LTE | 49 | 510 | |
| Bobbin | | | NQI | 0.67 | 3 | 91 | 007 | +17.51 | UTE | LTE | LTE | 49 | 510 | |
| Bobbin | 134 | 33 | NQI | 0.46 | P 1 | 121 | 004 | -0.75 | UTE | LTE | LTE | 48 | 510 | |
| Bobbin | 134 | 37 | NQI | 0.52 | 3 | 67 | 010 | +14.99 | UTE | LTE | LTE | 48 | 510 | |
| Bobbin | | | NQI | 0.35 | P 1 | 86 | 005 | -0.75 | UTE | LTE | LTE | 48 | 510 | |
| Bobbin | 134 | 38 | NQI | 0.30 | 3 | 78 | 015 | +35.32 | UTE | LTE | LTE | 49 | 510 | |
| Bobbin | | | NQI | 0.41 | 3 | 80 | 015 | +43.54 | UTE | LTE | LTE | 49 | 510 | |
| Bobbin | | | NQI | 0.53 | 3 | 80 | 015 | +40.30 | UTE | LTE | LTE | 49 | 510 | |
| Bobbin | 134 | 47 | NQI | 0.37 | 3 | 79 | 003 | +14.62 | UTE | LTE | LTE | 30 | 510 | |
| Bobbin | 134 | 69 | NQI | 0.11 | P 1 | 90 | 015 | +0.27 | UTE | LTE | LTE | 30 | 510 | |
| Bobbin | 134 | 84 | NQI | 0.44 | P 1 | 100 | 010 | +0.66 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | 134 | 85 | NQI | 0.35 | P 1 | 97 | 007 | +0.15 | UTE | LTE | LTE | 154 | 510 | |
| Bobbin | 135 | 1 | NQI | 0.41 | P 1 | 109 | 001 | -0.84 | UTE | LTE | LTE | 59 | 510 | |
| Bobbin | 135 | 2 | NQI | 0.37 | 3 | 111 | 002 | +6.18 | UTE | LTE | LTE | 58 | 510 | |
| Bobbin | 135 | 3 | NQI | 0.59 | 3 | 136 | 004 | +19.41 | UTE | LTE | LTE | 59 | 510 | |
| Bobbin | 135 | 6 | NQI | 0.64 | P 1 | 124 | 009 | +0.54 | UTE | LTE | LTE | 58 | 510 | |

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|----------|-----|-----|----------|------------------|---------|-----|-------|-------|----------|
| Bobbin | 135 | 22 | NQI | | 0.33 3 | | 90 | 007 | +38.59 | UTE | LTE | LTE | 48 | 510 |
| Bobbin | 135 | 29 | NQI | | 0.45 3 | | 108 | 013 | +16.79 | UTE | LTE | LTE | 48 | 510 |
| Bobbin | 135 | 40 | NQI | | 0.29 3 | | 89 | 006 | +32.96 | UTE | LTE | LTE | 48 | 510 |
| Bobbin | 135 | 44 | NQI | | 0.22 P 1 | | 78 | 010 | +0.45 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | 135 | 45 | NQI | | 0.22 3 | | 86 | 006 | +37.53 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | | | NQI | | 0.23 3 | | 83 | 002 | +16.16 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | | | NQI | | 0.41 3 | | 96 | 006 | +33.53 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | 135 | 51 | NQI | | 0.26 3 | | 109 | 006 | +20.73 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | 135 | 75 | NQI | | 0.33 3 | | 95 | 007 | +38.22 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | | | NQI | | 0.45 3 | | 111 | 006 | +32.19 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | | | NQI | | 0.53 3 | | 119 | 007 | +25.65 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | 136 | 3 | NQI | | 0.64 P 1 | | 103 | 014 | -0.80 | UTE | LTE | LTE | 59 | 510 |
| Bobbin | 136 | 20 | ODI | 7 | 0.28 P 1 | | 106 | 014 | +0.35 | UTE | LTE | LTE | 48 | 510 |
| Bobbin | 136 | 24 | NQI | | 0.32 3 | | 76 | 011 | +33.29 | UTE | LTE | LTE | 48 | 510 |
| Bobbin | 136 | 29 | NQI | | 0.52 P 1 | | 115 | 015 | +0.54 | UTE | LTE | LTE | 49 | 510 |
| Bobbin | 136 | 33 | NQI | | 0.27 3 | | 95 | 006 | +32.54 | UTE | LTE | LTE | 49 | 510 |
| Bobbin | 136 | 34 | NQI | | 0.35 3 | | 85 | 012 | +31.63 | UTE | LTE | LTE | 48 | 510 |
| Bobbin | | | NQI | | 0.43 3 | | 108 | 014 | +10.04 to +13.36 | UTE | LTE | LTE | 48 | 510 |
| Bobbin | 136 | 44 | NQI | | 0.28 3 | | 73 | 010 | +13.95 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | 136 | 54 | NQI | | 0.53 3 | | 75 | 006 | +7.60 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | 136 | 61 | NQI | | 0.45 3 | | 93 | 009 | +2.31 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | 136 | 76 | NQI | | 1.39 P 1 | | 99 | 009 | -0.70 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 136 | 78 | NQI | | 0.20 3 | | 87 | 010 | +9.63 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | | | NQI | | 0.27 3 | | 70 | 010 | +18.49 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | | | NQI | | 0.28 3 | | 77 | 015 | +2.59 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 136 | 80 | NQI | | 0.27 3 | | 90 | 010 | +23.55 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 137 | 3 | NQI | | 0.86 P 1 | | 104 | 010 | -0.74 | UTE | LTE | LTE | 59 | 510 |
| Bobbin | 137 | 27 | NQI | | 0.28 3 | | 107 | 011 | +19.41 | UTE | LTE | LTE | 49 | 510 |
| Bobbin | 137 | 60 | NQI | | 0.75 P 1 | | 118 | 004 | -0.71 | UTE | LTE | LTE | 32 | 510 |
| Bobbin | 137 | 61 | NQI | | 0.17 P 1 | | 92 | 015 | +0.13 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | 137 | 64 | NQI | | 0.14 3 | | 93 | 010 | +30.85 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | 137 | 70 | NQI | | 0.26 3 | | 102 | 014 | +15.07 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | | | NQI | | 0.36 3 | | 101 | 015 | +7.87 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | 137 | 71 | NQI | | 0.32 3 | | 82 | 014 | +27.94 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | 137 | 73 | NQI | | 0.31 3 | | 99 | 014 | +29.81 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | 137 | 74 | NQI | | 0.35 3 | | 79 | 009 | +37.69 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 137 | 75 | NQI | | 0.25 P 1 | | 81 | 015 | +1.22 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | 137 | 76 | NQI | | 0.46 3 | | 101 | 015 | +1.90 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 137 | 77 | NQI | | 0.40 3 | | 101 | 010 | +31.95 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | 137 | 78 | NQI | | 1.08 P 1 | | 111 | 010 | -0.30 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 138 | 3 | NQI | | 0.40 P 1 | | 112 | 010 | +0.67 | UTE | LTE | LTE | 59 | 510 |
| Bobbin | 138 | 11 | NQI | | 0.21 3 | | 97 | 013 | +4.97 | UTE | LTE | LTE | 49 | 510 |
| Bobbin | 138 | 18 | NQI | | 0.40 3 | | 86 | LTS | +20.53 | UTE | LTE | LTE | 48 | 510 |
| Bobbin | 138 | 49 | NQI | | 0.43 3 | | 98 | 002 | +28.13 | UTE | LTE | LTE | 32 | 510 |
| Bobbin | 138 | 62 | NQI | | 0.54 3 | | 113 | 006 | +26.58 | UTE | LTE | LTE | 32 | 510 |
| Bobbin | 138 | 69 | NQI | | 0.27 3 | | 98 | 013 | +18.61 | UTE | LTE | LTE | 32 | 510 |
| Bobbin | 139 | 3 | NQI | | 0.33 P 1 | | 70 | 010 | +0.48 | UTE | LTE | LTE | 54 | 510 |
| Bobbin | 139 | 5 | NQI | | 0.39 P 1 | | 83 | 008 | -0.39 | UTE | LTE | LTE | 54 | 510 |
| Bobbin | 139 | 8 | NQI | | 0.32 3 | | 93 | 013 | +33.46 | UTE | LTE | LTE | 49 | 510 |
| Bobbin | 139 | 11 | NQI | | 0.21 3 | | 117 | 009 | +28.16 | UTE | LTE | LTE | 48 | 510 |
| Bobbin | 139 | 20 | NQI | | 0.32 3 | | 83 | 010 | +31.26 | UTE | LTE | LTE | 49 | 510 |
| Bobbin | | | NQI | | 0.34 3 | | 105 | 011 | +35.59 | UTE | LTE | LTE | 49 | 510 |
| Bobbin | 139 | 21 | NQI | | 0.23 3 | | 88 | 011 | +21.49 | UTE | LTE | LTE | 48 | 510 |
| Bobbin | 139 | 26 | NQI | | 0.26 3 | | 105 | 009 | +31.79 | UTE | LTE | LTE | 49 | 510 |
| Bobbin | 139 | 43 | NQI | | 0.28 3 | | 84 | 015 | +4.74 | UTE | LTE | LTE | 87 | 510 |
| Bobbin | 139 | 45 | NQI | | 0.33 P 1 | | 53 | 004 | +0.78 | UTE | LTE | LTE | 87 | 510 |
| Bobbin | 139 | 51 | NQI | | 0.27 3 | | 94 | 009 | +30.29 | UTE | LTE | LTE | 36 | 510 |
| Bobbin | 139 | 62 | NQI | | 0.20 3 | | 87 | 011 | +29.69 | UTE | LTE | LTE | 36 | 510 |
| Bobbin | 139 | 67 | NQI | | 0.58 P 1 | | 80 | 014 | -1.11 | UTE | LTE | LTE | 35 | 510 |
| Bobbin | 139 | 69 | NQI | | 0.59 P 1 | | 85 | 014 | -1.07 | UTE | LTE | LTE | 35 | 510 |
| Bobbin | 139 | 70 | NQI | | 0.29 3 | | 107 | 015 | +9.25 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | 139 | 72 | NQI | | 0.25 3 | | 81 | 012 | +30.87 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | | | NQI | | 0.31 3 | | 73 | 010 | +20.74 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | | | NQI | | 0.31 3 | | 112 | 013 | +9.46 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | | | NQI | | 0.32 3 | | 100 | 012 | +28.81 | UTE | LTE | LTE | 154 | 510 |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 34 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|------|-----|----------|------------------|---------|-----|-------|---------|----------|
| Bobbin | | | | | NQI | 0.37 | 3 | 104 010 | +17.38 | UTE | LTE | LTE | 154 510 | |
| Bobbin | | | | | NQI | 0.44 | 3 | 100 010 | +24.34 | UTE | LTE | LTE | 154 510 | |
| Bobbin | | | | | NQI | 0.44 | 3 | 107 010 | +7.88 | UTE | LTE | LTE | 154 510 | |
| Bobbin | | | | | NQI | 0.46 | 3 | 105 008 | +33.20 | UTE | LTE | LTE | 154 510 | |
| Bobbin | 139 | 74 | | | NQI | 0.34 | 3 | 88 015 | +21.48 | UTE | LTE | LTE | 154 510 | |
| Bobbin | 140 | 1 | | | NQI | 0.28 | P 1 | 111 012 | -0.42 | UTE | LTE | LTE | 54 510 | |
| Bobbin | | | | | NQI | 0.30 | P 1 | 49 012 | +0.35 | UTE | LTE | LTE | 54 510 | |
| Bobbin | | | | | NQI | 0.64 | P 1 | 119 011 | -0.81 | UTE | LTE | LTE | 54 510 | |
| Bobbin | 140 | 3 | | | NQI | 0.52 | P 1 | 123 010 | -0.33 | UTE | LTE | LTE | 54 510 | |
| Bobbin | 140 | 5 | | | NQI | 0.19 | P 1 | 62 009 | -0.51 | UTE | LTE | LTE | 48 510 | |
| Bobbin | | | | | NQI | 0.29 | P 1 | 102 009 | -0.50 | UTE | LTE | LTE | 54 510 | |
| Bobbin | | | | | NQI | 0.37 | P 1 | 79 009 | +0.53 | UTE | LTE | LTE | 48 510 | |
| Bobbin | | | | | NQI | 0.40 | P 1 | 86 009 | +0.55 | UTE | LTE | LTE | 54 510 | IDOK |
| Bobbin | 140 | 7 | | | NQI | 0.19 | P 1 | 115 002 | -0.15 | UTE | LTE | LTE | 48 510 | |
| Bobbin | 140 | 34 | | | NQI | 0.33 | 3 | 92 008 | +22.34 | UTE | LTE | LTE | 49 510 | |
| Bobbin | | | | | NQI | 0.23 | P 1 | 77 009 | -0.13 | UTE | LTE | LTE | 49 510 | |
| Bobbin | 140 | 45 | | | NQI | 0.57 | 3 | 71 004 | +6.10 | UTE | LTE | LTE | 36 510 | |
| Bobbin | 140 | 59 | | | NQI | 0.39 | P 1 | 123 015 | +0.53 | UTE | LTE | LTE | 36 510 | |
| Bobbin | 140 | 71 | | | NQI | 0.44 | 3 | 68 UTS | -0.72 | UTE | LTE | LTE | 154 510 | |
| Bobbin | | | | | NQI | 0.19 | P 1 | 99 014 | -0.43 | UTE | LTE | LTE | 154 510 | |
| Bobbin | 141 | 1 | | | NQI | 0.99 | P 1 | 83 014 | -0.70 | UTE | LTE | LTE | 54 510 | |
| Bobbin | 141 | 31 | | | NQI | 0.28 | P 1 | 86 008 | -0.15 | UTE | LTE | LTE | 49 510 | |
| Bobbin | 141 | 46 | | | NQI | 0.43 | 3 | 82 001 | +2.02 | UTE | LTE | LTE | 36 510 | |
| Bobbin | 141 | 53 | | | NQI | 0.50 | 3 | 110 006 | +26.43 | UTE | LTE | LTE | 35 510 | |
| Bobbin | 141 | 55 | | | NQI | 0.29 | P 1 | 94 015 | +0.33 | UTE | LTE | LTE | 35 510 | |
| Bobbin | 141 | 59 | | | NQI | 1.22 | P 1 | 94 008 | -0.71 | UTE | LTE | LTE | 35 510 | |
| Bobbin | 141 | 63 | | | NQI | 1.16 | 3 | 111 007 | +9.84 | UTE | LTE | LTE | 36 510 | |
| Bobbin | 142 | 1 | | | NQI | 0.58 | P 1 | 89 014 | -0.77 | UTE | LTE | LTE | 54 510 | |
| Bobbin | 142 | 8 | | | NQI | 0.88 | P 1 | 98 008 | -0.50 | UTE | LTE | LTE | 49 510 | |
| Bobbin | 142 | 12 | | | NQI | 0.22 | P 1 | 98 014 | +0.22 | UTE | LTE | LTE | 49 510 | |
| Bobbin | 142 | 17 | | | NQI | 0.23 | 3 | 74 009 | +30.36 | UTE | LTE | LTE | 48 510 | |
| Bobbin | 142 | 27 | | | NQI | 0.26 | 3 | 104 015 | +9.38 | UTE | LTE | LTE | 48 510 | |
| Bobbin | | | | | NQI | 0.42 | 3 | 95 015 | +43.93 | UTE | LTE | LTE | 48 510 | |
| Bobbin | 142 | 40 | | | NQI | 0.33 | 3 | 84 013 | +1.51 | UTE | LTE | LTE | 36 510 | |
| Bobbin | 142 | 41 | | | NQI | 0.40 | 3 | 83 013 | +28.72 | UTE | LTE | LTE | 36 510 | |
| Bobbin | 142 | 54 | | | NQI | 0.31 | P 1 | 81 015 | +0.29 | UTE | LTE | LTE | 36 510 | |
| Bobbin | 142 | 57 | | | NQI | 0.20 | 3 | 98 012 | +18.94 | UTE | LTE | LTE | 36 510 | |
| Bobbin | 142 | 61 | | | NQI | 0.21 | P 1 | 85 014 | +0.36 | UTE | LTE | LTE | 36 510 | |
| Bobbin | 142 | 62 | | | NQI | 0.37 | 3 | 111 015 | +1.75 | UTE | LTE | LTE | 36 510 | |
| Bobbin | 143 | 3 | | | NQI | 0.57 | P 1 | 102 014 | -0.82 | UTE | LTE | LTE | 48 510 | |
| Bobbin | 143 | 8 | | | NQI | 0.74 | P 1 | 105 008 | +0.48 | UTE | LTE | LTE | 49 510 | |
| Bobbin | 143 | 14 | | | NQI | 0.41 | 3 | 92 013 | +6.28 | UTE | LTE | LTE | 49 510 | |
| Bobbin | 143 | 21 | | | NQI | 0.20 | 3 | 108 LTS | +43.20 | UTE | LTE | LTE | 48 510 | |
| Bobbin | 143 | 27 | | | NQI | 0.47 | 3 | 95 013 | +12.34 | UTE | LTE | LTE | 48 510 | |
| Bobbin | | | | | NQI | 0.48 | 3 | 87 013 | +16.99 | UTE | LTE | LTE | 48 510 | |
| Bobbin | 143 | 38 | | | NQI | 0.68 | 3 | 89 003 | +21.84 | UTE | LTE | LTE | 36 510 | |
| Bobbin | 143 | 49 | | | NQI | 0.55 | 3 | 100 013 | +1.27 | UTE | LTE | LTE | 36 510 | |
| Bobbin | 143 | 55 | | | NQI | 0.28 | 3 | 103 015 | +2.51 | UTE | LTE | LTE | 36 510 | |
| Bobbin | 143 | 59 | | | NQI | 0.36 | 3 | 104 012 | +29.46 | UTE | LTE | LTE | 36 510 | |
| Bobbin | 143 | 61 | | | NQI | 0.36 | 3 | 110 015 | +4.10 | UTE | LTE | LTE | 36 510 | |
| Bobbin | 144 | 1 | | | DWI | 0.56 | 3 | 40 003 | +12.84 | UTE | LTE | LTE | 49 510 | |
| Bobbin | 144 | 13 | | | NQI | 0.31 | 3 | 113 011 | +18.79 | UTE | LTE | LTE | 48 510 | |
| Bobbin | 144 | 25 | | | NQI | 0.33 | 3 | 104 006 | +28.73 | UTE | LTE | LTE | 48 510 | |
| Bobbin | 144 | 31 | | | NQI | 1.76 | P 1 | 105 001 | +0.73 | UTE | LTE | LTE | 40 510 | |
| Bobbin | 144 | 42 | | | NQI | 0.24 | 3 | 94 011 | +14.35 | UTE | LTE | LTE | 41 510 | |
| Bobbin | | | | | NQI | 0.38 | 3 | 109 011 | +7.38 | UTE | LTE | LTE | 41 510 | |
| Bobbin | | | | | NQI | 0.31 | 3 | 103 011 | +21.74 to +31.65 | UTE | LTE | LTE | 41 510 | |
| Bobbin | | | | | NQI | 0.34 | 3 | 104 011 | +1.08 to +4.33 | UTE | LTE | LTE | 41 510 | |
| Bobbin | | | | | NQI | 0.37 | 3 | 104 012 | +2.62 to +29.79 | UTE | LTE | LTE | 41 510 | |
| Bobbin | | | | | NQI | 0.40 | 3 | 112 010 | +8.79 to +32.89 | UTE | LTE | LTE | 41 510 | |
| Bobbin | | | | | NQI | 0.46 | 3 | 98 013 | +7.82 to +14.61 | UTE | LTE | LTE | 41 510 | |
| Bobbin | 144 | 44 | | | NQI | 0.32 | 3 | 79 010 | +32.75 | UTE | LTE | LTE | 41 510 | |
| Bobbin | 144 | 46 | | | NQI | 0.74 | P 1 | 103 013 | +0.84 | UTE | LTE | LTE | 41 510 | |
| Bobbin | 144 | 49 | | | NQI | 0.94 | P 1 | 106 008 | -0.51 | UTE | LTE | LTE | 41 510 | |
| Bobbin | 144 | 53 | | | NQI | 0.21 | P 1 | 82 008 | +0.22 | UTE | LTE | LTE | 41 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 35 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|-----|-----|----------|------------------|---------|-----|-------|-------|----------|
| Bobbin | 145 | 1 | NQI | | 0.62 | P 1 | 83 | 013 | -0.67 | UTE | LTE | LTE | 49 | 510 |
| Bobbin | 145 | 16 | NQI | | 0.46 | 3 | 100 | 007 | +4.99 | UTE | LTE | LTE | 48 | 510 |
| Bobbin | | | NQI | | 0.30 | P 1 | 88 | 008 | -0.68 | UTE | LTE | LTE | 48 | 510 |
| Bobbin | 145 | 36 | NQI | | 0.34 | P 1 | 68 | 014 | -0.36 | UTE | LTE | LTE | 40 | 510 |
| Bobbin | 145 | 47 | NQI | | 0.46 | P 1 | 101 | 008 | +0.47 | UTE | LTE | LTE | 40 | 510 |
| Bobbin | 145 | 49 | NQI | | 0.28 | 3 | 99 | 012 | +10.88 | UTE | LTE | LTE | 40 | 510 |
| Bobbin | | | NQI | | 0.30 | 3 | 96 | 012 | +5.31 | UTE | LTE | LTE | 40 | 510 |
| Bobbin | 145 | 53 | NQI | | 0.42 | 3 | 103 | 011 | +19.71 | UTE | LTE | LTE | 41 | 510 |
| Bobbin | | | NQI | | 0.52 | 3 | 113 | 012 | +16.68 | UTE | LTE | LTE | 41 | 510 |
| Bobbin | 146 | 7 | NQI | | 0.51 | P 1 | 106 | 009 | +0.63 | UTE | LTE | LTE | 49 | 510 |
| Bobbin | 146 | 12 | NQI | | 0.36 | 3 | 76 | 001 | +6.64 | UTE | LTE | LTE | 48 | 510 |
| Bobbin | 146 | 13 | ODI | 22 | 1.10 | P 1 | 95 | 008 | +0.69 | UTE | LTE | LTE | 49 | 510 |
| Bobbin | 146 | 14 | ODI | 13 | 0.88 | P 1 | 104 | 008 | -0.62 | UTE | LTE | LTE | 48 | 510 |
| Bobbin | 146 | 21 | NQI | | 0.42 | P 1 | 88 | 008 | +0.26 | UTE | LTE | LTE | 49 | 510 |
| Bobbin | 146 | 22 | NQI | | 0.33 | 3 | 87 | 008 | +3.70 | UTE | LTE | LTE | 48 | 510 |
| Bobbin | | | NQI | | 0.38 | 3 | 95 | 009 | +7.92 | UTE | LTE | LTE | 48 | 510 |
| Bobbin | 146 | 29 | NQI | | 0.58 | P 1 | 112 | 008 | -0.76 | UTE | LTE | LTE | 45 | 510 |
| Bobbin | 146 | 31 | NQI | | 0.44 | P 1 | 82 | 009 | -0.49 | UTE | LTE | LTE | 45 | 510 |
| Bobbin | 146 | 34 | NQI | | 0.26 | 3 | 77 | 012 | +35.14 | UTE | LTE | LTE | 44 | 510 |
| Bobbin | 146 | 37 | NQI | | 0.29 | 3 | 102 | 009 | +33.85 | UTE | LTE | LTE | 45 | 510 |
| Bobbin | 146 | 43 | NQI | | 0.37 | P 1 | 123 | 009 | -0.22 | UTE | LTE | LTE | 45 | 510 |
| Bobbin | | | NQI | | 0.98 | P 1 | 86 | 009 | +0.52 | UTE | LTE | LTE | 45 | 510 |
| Bobbin | 146 | 46 | NQI | | 0.37 | P 1 | 99 | 008 | -0.16 | UTE | LTE | LTE | 44 | 510 |
| Bobbin | 147 | 4 | NQI | | 0.45 | 3 | 99 | 008 | +35.50 | UTE | LTE | LTE | 48 | 510 |
| Bobbin | 147 | 5 | NQI | | 0.30 | 3 | 76 | 015 | +3.95 | UTE | LTE | LTE | 49 | 510 |
| Bobbin | 147 | 6 | NQI | | 0.29 | 3 | 99 | 011 | +15.48 | UTE | LTE | LTE | 48 | 510 |
| Bobbin | 147 | 11 | NQI | | 0.38 | 3 | 90 | 007 | +33.27 | UTE | LTE | LTE | 48 | 510 |
| Bobbin | | | NQI | | 0.54 | 3 | 85 | 007 | +32.62 | UTE | LTE | LTE | 48 | 510 |
| Bobbin | | | NQI | | 0.16 | P 1 | 90 | 007 | +0.18 | UTE | LTE | LTE | 48 | 510 |
| Bobbin | | | NQI | | 0.55 | P 1 | 83 | 008 | +0.65 | UTE | LTE | LTE | 48 | 510 |
| Bobbin | 147 | 12 | NQI | | 0.49 | P 1 | 83 | 010 | -0.85 | UTE | LTE | LTE | 49 | 510 |
| Bobbin | 147 | 15 | NQI | | 0.27 | P 1 | 91 | 005 | +1.05 | UTE | LTE | LTE | 48 | 510 |
| Bobbin | 147 | 17 | NQI | | 0.28 | 3 | 92 | 014 | +27.24 | UTE | LTE | LTE | 49 | 510 |
| Bobbin | 147 | 21 | NQI | | 0.27 | 3 | 93 | 011 | +29.09 | UTE | LTE | LTE | 49 | 510 |
| Bobbin | | | NQI | | 0.37 | 3 | 109 | 014 | +7.18 | UTE | LTE | LTE | 49 | 510 |
| Bobbin | 147 | 26 | NQI | | 0.23 | P 1 | 91 | 007 | +0.70 | UTE | LTE | LTE | 87 | 510 |
| Bobbin | 147 | 28 | NQI | | 0.63 | P 1 | 107 | 009 | +0.47 | UTE | LTE | LTE | 87 | 510 |
| Bobbin | 147 | 34 | NQI | | 0.35 | 3 | 90 | 008 | +7.05 | UTE | LTE | LTE | 88 | 510 |
| Bobbin | 147 | 42 | NQI | | 0.37 | P 1 | 58 | 009 | +0.23 | UTE | LTE | LTE | 44 | 510 |
| Bobbin | 148 | 10 | NQI | | 0.29 | P 1 | 67 | 008 | +0.63 | UTE | LTE | LTE | 87 | 510 |
| Bobbin | 148 | 21 | NQI | | 0.36 | P 1 | 94 | 009 | -0.61 | UTE | LTE | LTE | 23 | 510 |
| Bobbin | | | NQI | | 0.35 | P 1 | 74 | 009 | -0.61 | UTE | LTE | LTE | 44 | 510 |
| Bobbin | 148 | 23 | NQI | | 0.30 | 3 | 102 | 011 | +28.23 | UTE | LTE | LTE | 21 | 510 |
| Bobbin | | | NQI | | 0.32 | 3 | 101 | 011 | +28.23 | UTE | LTE | LTE | 24 | 510 |
| Bobbin | 148 | 31 | NQI | | 0.19 | 3 | 100 | 011 | +26.80 to +36.25 | UTE | LTE | LTE | 21 | 510 |
| Bobbin | 148 | 39 | NQI | | 0.28 | 3 | 94 | 010 | +7.77 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | 148 | 40 | NQI | | 0.24 | 3 | 84 | 011 | +21.50 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | 148 | 41 | NQI | | 0.43 | 3 | 103 | 012 | +4.90 | UTE | LTE | LTE | 21 | 510 |
| Bobbin | 149 | 1 | NQI | | 0.37 | 3 | 95 | LTS | +35.55 | UTE | LTE | LTE | 45 | 510 |
| Bobbin | 149 | 8 | NQI | | 0.64 | P 1 | 113 | 009 | +0.54 | UTE | LTE | LTE | 44 | 510 |
| Bobbin | 149 | 15 | NQI | | 0.32 | 3 | 106 | 014 | +11.88 | UTE | LTE | LTE | 44 | 510 |
| Bobbin | | | NQI | | 0.24 | P 1 | 114 | 004 | -0.20 | UTE | LTE | LTE | 44 | 510 |
| Bobbin | 149 | 16 | NQI | | 0.54 | P 1 | 52 | 010 | +0.64 | UTE | LTE | LTE | 45 | 510 |
| Bobbin | 149 | 25 | NQI | | 1.06 | 3 | 122 | 010 | +14.46 | UTE | LTE | LTE | 21 | 510 |
| Bobbin | | | NQI | | 0.47 | P 1 | 82 | 010 | +0.02 | UTE | LTE | LTE | 21 | 510 |
| Bobbin | | | NQI | | 0.63 | P 1 | 102 | 010 | +0.31 | UTE | LTE | LTE | 21 | 510 |
| Bobbin | 149 | 29 | NQI | | 0.10 | 3 | 96 | 014 | +26.33 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | | | NQI | | 0.18 | 3 | 98 | 012 | +24.94 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | | | NQI | | 0.18 | 3 | 98 | 013 | +19.80 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | | | NQI | | 0.20 | 3 | 52 | 012 | +11.04 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | | | NQI | | 0.20 | 3 | 95 | 012 | +26.25 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | | | NQI | | 0.20 | 3 | 97 | 012 | +26.50 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | | | NQI | | 0.21 | 3 | 63 | 012 | +20.92 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | | | NQI | | 0.22 | 3 | 100 | 013 | +12.32 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | | | NQI | | 0.24 | 3 | 94 | 012 | +21.84 | UTE | LTE | LTE | 17 | 510 |

IDOK

IDOK

FTI TUBAN II (Version 2.3) 05/09/2000 08:32:57
 Oconee Nuclear Station - Unit Three
 S/G A
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 36 of 36

ATTACHMENT A-1 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|------|-----|----------|---------|---------|-----|-------|-------|----------|
| Bobbin | | | | | NQI | 0.25 | 3 | 102 013 | +22.87 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | | | | | NQI | 0.25 | 3 | 106 012 | +24.18 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | | | | | NQI | 0.26 | 3 | 100 014 | +18.41 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | | | | | NQI | 0.26 | 3 | 109 014 | +28.16 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | | | | | NQI | 0.27 | 3 | 87 012 | +13.38 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | | | | | NQI | 0.29 | 3 | 41 012 | +20.04 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | | | | | NQI | 0.30 | 3 | 108 012 | +22.45 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | | | | | NQI | 0.31 | 3 | 82 011 | +22.05 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | | | | | NQI | 0.31 | 3 | 93 011 | +22.64 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | | | | | NQI | 0.31 | 3 | 102 013 | +14.89 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | | | | | NQI | 0.34 | 3 | 112 012 | +6.32 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | | | | | NQI | 0.39 | 3 | 104 013 | +11.73 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | | | | | NQI | 0.40 | 3 | 107 013 | +16.15 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | 149 | 30 | ODI | 15 | | 0.42 | P 1 | 99 013 | +1.21 | UTE | LTE | LTE | 21 | 510 |
| Bobbin | 150 | 3 | NQI | | | 0.56 | 3 | 99 015 | +17.80 | UTE | LTE | LTE | 45 | 510 |
| Bobbin | 150 | 8 | NQI | | | 0.43 | P 1 | 107 006 | +0.51 | UTE | LTE | LTE | 88 | 510 |
| Bobbin | | | | | | 0.49 | P 1 | 85 010 | +0.58 | UTE | LTE | LTE | 88 | 510 |
| Bobbin | 150 | 9 | NQI | | | 0.64 | P 1 | 101 010 | -0.60 | UTE | LTE | LTE | 45 | 510 |
| Bobbin | 150 | 11 | NQI | | | 0.64 | P 1 | 122 010 | +0.69 | UTE | LTE | LTE | 87 | 510 |
| Bobbin | 150 | 12 | NQI | | | 0.31 | P 1 | 82 010 | +0.07 | UTE | LTE | LTE | 88 | 510 |
| Bobbin | | | | | | 0.51 | P 1 | 93 010 | -0.70 | UTE | LTE | LTE | 88 | 510 |
| Bobbin | | | | | | 1.02 | P 1 | 84 010 | +0.69 | UTE | LTE | LTE | 88 | 510 |
| Bobbin | 150 | 14 | NQI | | | 0.39 | P 1 | 80 006 | +0.67 | UTE | LTE | LTE | 88 | 510 |
| Bobbin | | | | | | 0.49 | P 1 | 91 010 | +0.74 | UTE | LTE | LTE | 88 | 510 |
| Bobbin | 150 | 19 | NQI | | | 0.46 | P 1 | 103 011 | -0.27 | UTE | LTE | LTE | 16 | 510 |
| Bobbin | 150 | 20 | NQI | | | 0.21 | 3 | 97 010 | +17.86 | UTE | LTE | LTE | 16 | 510 |
| Bobbin | | | | | | 0.33 | 3 | 108 011 | +6.04 | UTE | LTE | LTE | 16 | 510 |
| Bobbin | | | | | | 0.48 | 3 | 100 011 | +6.62 | UTE | LTE | LTE | 16 | 510 |
| Bobbin | | | | | | 0.50 | 3 | 117 010 | +16.45 | UTE | LTE | LTE | 16 | 510 |
| Bobbin | 150 | 22 | NQI | | | 0.43 | 3 | 108 013 | +4.47 | UTE | LTE | LTE | 16 | 510 |
| Bobbin | | | | | | 0.48 | P 1 | 101 LTE | +1.89 | UTE | LTE | LTE | 16 | 510 |
| Bobbin | 150 | 23 | NQI | | | 1.14 | 3 | 111 011 | +5.81 | UTE | LTE | LTE | 16 | 510 |
| Bobbin | 150 | 27 | NQI | | | 0.44 | 3 | 90 013 | +3.27 | UTE | LTE | LTE | 16 | 510 |
| Bobbin | 151 | 3 | NQI | | | 0.53 | P 1 | 76 012 | -0.69 | UTE | LTE | LTE | 45 | 510 |
| Bobbin | 151 | 4 | NQI | | | 0.37 | P 1 | 95 006 | +0.46 | UTE | LTE | LTE | 45 | 510 |
| Bobbin | 151 | 5 | NQI | | | 0.66 | P 1 | 112 012 | -0.78 | UTE | LTE | LTE | 45 | 510 |
| Bobbin | | | | | | 1.02 | P 1 | 100 013 | -0.71 | UTE | LTE | LTE | 45 | 510 |
| Bobbin | 151 | 12 | NQI | | | 0.30 | 3 | 90 011 | +8.00 | UTE | LTE | LTE | 16 | 510 |
| Bobbin | 151 | 13 | NQI | | | 0.34 | 3 | 97 014 | +32.34 | UTE | LTE | LTE | 16 | 510 |
| Bobbin | 151 | 14 | ADI | | | 0.64 | 6 | 87 014 | +31.93 | UTE | LTE | LTE | 16 | 510 |
| Bobbin | | | | | | 0.54 | P 1 | 101 014 | +0.52 | UTE | LTE | LTE | 16 | 510 |
| Bobbin | 151 | 15 | NQI | | | 0.27 | 3 | 95 011 | +9.83 | UTE | LTE | LTE | 16 | 510 |
| Bobbin | | | | | | 0.30 | 3 | 100 011 | +15.37 | UTE | LTE | LTE | 16 | 510 |
| Bobbin | | | | | | 0.45 | 3 | 111 012 | +8.74 | UTE | LTE | LTE | 16 | 510 |
| Bobbin | | | | | | 0.48 | 3 | 114 013 | +5.06 | UTE | LTE | LTE | 16 | 510 |
| Bobbin | | | | | | 0.71 | 3 | 111 011 | +12.84 | UTE | LTE | LTE | 16 | 510 |
| Bobbin | 151 | 16 | NQI | | | 0.49 | 3 | 89 013 | +3.07 | UTE | LTE | LTE | 16 | 510 |
| Bobbin | | | | | | 1.01 | 3 | 106 012 | +4.34 | UTE | LTE | LTE | 16 | 510 |
| Bobbin | | | | | | 2.61 | 3 | 104 013 | +4.16 | UTE | LTE | LTE | 16 | 510 |
| Bobbin | | | | | | 0.25 | P 1 | 77 014 | +0.59 | UTE | LTE | LTE | 16 | 510 |

Total Indications Found = 2325
 Total Tubes Found = 1765

FTI TUBAN II (Version 2.3) 05/09/2000 08:36:15
 Oconee Nuclear Station - Unit Three
 S/G B
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 1 of 24

ATTACHMENT A-2 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|-----|-----|----------|---------|---------|-----|-------|---------|----------|
| Bobbin | 1 | 1 | NQI | | 0.76 | P | 1 | 139 010 | -0.24 | UTE | LTE | LTE | 120 510 | |
| Bobbin | 1 | 5 | NQI | | 0.57 | P | 1 | 22 010 | -0.18 | UTE | LTE | LTE | 121 510 | |
| Bobbin | 2 | 8 | NQI | | 0.54 | 3 | | 94 005 | +20.03 | UTE | LTE | LTE | 121 510 | |
| Bobbin | 2 | 9 | NQI | | 0.79 | 3 | | 129 009 | +37.91 | UTE | LTE | LTE | 120 510 | |
| Bobbin | 2 | 10 | NQI | | 1.27 | P | 1 | 76 015 | -0.75 | UTE | LTE | LTE | 121 510 | |
| Bobbin | 3 | 8 | NQI | | 0.93 | 3 | | 134 009 | +37.24 | UTE | LTE | LTE | 120 510 | |
| Bobbin | 3 | 9 | NQI | | 1.43 | P | 1 | 70 015 | -0.88 | UTE | LTE | LTE | 121 510 | |
| Bobbin | | | NQI | | 5.48 | P | 1 | 144 015 | +0.74 | UTE | LTE | LTE | 121 510 | |
| Bobbin | 3 | 11 | NQI | | 0.75 | 3 | | 100 009 | +37.56 | UTE | LTE | LTE | 121 510 | |
| Bobbin | 3 | 22 | NQI | | 0.43 | 3 | | 62 015 | +18.60 | UTE | LTE | LTE | 92 510 | |
| Bobbin | 3 | 23 | NQI | | 0.24 | P | 1 | 103 008 | -0.37 | UTE | LTE | LTE | 92 510 | |
| Bobbin | 3 | 29 | ADI | | 1.63 | 6 | | 74 015 | +31.99 | UTE | LTE | LTE | 92 510 | |
| Bobbin | 4 | 2 | NQI | | 0.50 | P | 1 | 77 011 | -0.78 | UTE | LTE | LTE | 120 510 | |
| Bobbin | 4 | 8 | NQI | | 0.67 | 3 | | 111 009 | +35.95 | UTE | LTE | LTE | 120 510 | |
| Bobbin | 4 | 9 | NQI | | 1.00 | 3 | | 124 010 | -1.84 | UTE | LTE | LTE | 121 510 | |
| Bobbin | 4 | 10 | DWI | | 1.97 | P | 1 | 44 009 | +38.75 | UTE | LTE | LTE | 120 510 | |
| Bobbin | 4 | 11 | NQI | | 2.10 | 3 | | 139 009 | +37.28 | UTE | LTE | LTE | 121 510 | |
| Bobbin | 4 | 35 | NQI | | 0.84 | P | 1 | 70 010 | +0.60 | UTE | LTE | LTE | 92 510 | |
| Bobbin | 4 | 39 | ADI | | 2.06 | 6 | | 56 015 | +32.67 | UTE | LTE | LTE | 92 510 | |
| Bobbin | 5 | 5 | NQI | | 0.39 | 3 | | 106 004 | +31.94 | UTE | LTE | LTE | 120 510 | |
| Bobbin | 5 | 6 | NQI | | 0.64 | 3 | | 103 009 | +38.13 | UTE | LTE | LTE | 121 510 | |
| Bobbin | | | NQI | | 0.29 | P | 1 | 87 014 | -0.27 | UTE | LTE | LTE | 121 510 | |
| Bobbin | 5 | 9 | ADI | | 2.34 | 6 | | 264 009 | +37.80 | UTE | LTE | LTE | 120 510 | |
| Bobbin | 5 | 22 | NQI | | 0.47 | 3 | | 61 013 | +14.03 | UTE | LTE | LTE | 121 510 | |
| Bobbin | 5 | 23 | NQI | | 0.58 | P | 1 | 124 009 | +0.54 | UTE | LTE | LTE | 121 510 | |
| Bobbin | 5 | 31 | NQI | | 0.44 | P | 1 | 68 008 | +0.63 | UTE | LTE | LTE | 92 510 | |
| Bobbin | 5 | 35 | NQI | | 0.46 | P | 1 | 124 009 | +0.52 | UTE | LTE | LTE | 92 510 | |
| Bobbin | 5 | 40 | NQI | | 0.55 | P | 1 | 126 UTS | +0.52 | UTE | LTE | LTE | 122 510 | |
| Bobbin | 5 | 42 | NQI | | 0.62 | P | 1 | 113 010 | +0.52 | UTE | LTE | LTE | 122 510 | |
| Bobbin | 5 | 44 | NQI | | 0.57 | P | 1 | 107 LTS | +0.00 | UTE | LTE | LTE | 122 510 | |
| Bobbin | 6 | 5 | NQI | | 0.58 | 3 | | 125 010 | -1.90 | UTE | LTE | LTE | 121 510 | |
| Bobbin | | | NQI | | 1.00 | 3 | | 120 009 | +37.64 | UTE | LTE | LTE | 121 510 | |
| Bobbin | 6 | 6 | NQI | | 1.38 | 3 | | 104 009 | +37.49 | UTE | LTE | LTE | 120 510 | |
| Bobbin | 6 | 10 | NQI | | 0.67 | 3 | | 115 014 | +1.16 | UTE | LTE | LTE | 120 510 | |
| Bobbin | 6 | 19 | NQI | | 0.36 | P | 1 | 70 008 | -0.70 | UTE | LTE | LTE | 120 510 | |
| Bobbin | 6 | 35 | NQI | | 0.26 | 3 | | 81 009 | +24.34 | UTE | LTE | LTE | 91 510 | |
| Bobbin | 6 | 41 | NQI | | 0.40 | P | 1 | 73 008 | -0.51 | UTE | LTE | LTE | 91 510 | |
| Bobbin | 6 | 43 | NQI | | 0.61 | P | 1 | 115 008 | -0.61 | UTE | LTE | LTE | 91 510 | |
| Bobbin | 6 | 45 | NQI | | 0.43 | P | 1 | 146 011 | -0.82 | UTE | LTE | LTE | 91 510 | |
| Bobbin | 7 | 5 | NQI | | 0.31 | 3 | | 86 012 | +28.92 | UTE | LTE | LTE | 116 510 | |
| Bobbin | | | NQI | | 0.42 | 3 | | 109 004 | +15.50 | UTE | LTE | LTE | 116 510 | |
| Bobbin | 7 | 8 | NQI | | 0.24 | 3 | | 94 010 | +5.40 | UTE | LTE | LTE | 117 510 | |
| Bobbin | 7 | 10 | NQI | | 0.50 | P | 1 | 67 014 | -0.10 | UTE | LTE | LTE | 117 510 | |
| Bobbin | 7 | 13 | NQI | | 0.43 | 3 | | 97 010 | +4.70 | UTE | LTE | LTE | 116 510 | |
| Bobbin | | | NQI | | 0.51 | 3 | | 107 010 | +4.09 | UTE | LTE | LTE | 116 510 | |
| Bobbin | 7 | 14 | NQI | | 0.45 | 3 | | 101 010 | +6.05 | UTE | LTE | LTE | 117 510 | |
| Bobbin | 7 | 16 | NQI | | 0.92 | P | 1 | 44 009 | -0.02 | UTE | LTE | LTE | 117 510 | |
| Bobbin | 7 | 17 | NQI | | 0.63 | P | 1 | 60 009 | +0.60 | UTE | LTE | LTE | 117 510 | |
| Bobbin | 7 | 19 | NQI | | 0.22 | P | 1 | 104 010 | -0.20 | UTE | LTE | LTE | 116 510 | |
| Bobbin | 7 | 23 | NQI | | 0.42 | 3 | | 63 009 | +32.42 | UTE | LTE | LTE | 116 510 | |
| Bobbin | 7 | 45 | NQI | | 0.37 | P | 1 | 116 009 | -0.64 | UTE | LTE | LTE | 88 510 | |
| Bobbin | 7 | 51 | NQI | | 0.27 | 3 | | 105 LTS | +35.67 | UTE | LTE | LTE | 88 510 | |
| Bobbin | 8 | 5 | NQI | | 0.51 | P | 1 | 65 014 | +0.82 | UTE | LTE | LTE | 117 510 | |
| Bobbin | | | ODI | 10 | 0.37 | P | 1 | 82 014 | +1.15 | UTE | LTE | LTE | 117 510 | |
| Bobbin | 8 | 10 | NQI | | 0.78 | P | 1 | 95 010 | -0.81 | UTE | LTE | LTE | 116 510 | |
| Bobbin | 8 | 13 | NQI | | 0.31 | P | 1 | 73 014 | +0.12 | UTE | LTE | LTE | 117 510 | |
| Bobbin | 8 | 14 | NQI | | 1.17 | 3 | | 102 013 | +24.69 | UTE | LTE | LTE | 116 510 | |
| Bobbin | 8 | 15 | NQI | | 0.30 | 3 | | 89 010 | +7.40 | UTE | LTE | LTE | 117 510 | |
| Bobbin | 8 | 19 | NQI | | 0.43 | P | 1 | 119 010 | +0.62 | UTE | LTE | LTE | 117 510 | |
| Bobbin | 8 | 21 | NQI | | 0.66 | 3 | | 61 006 | +15.72 | UTE | LTE | LTE | 117 510 | |
| Bobbin | 8 | 29 | NQI | | 0.77 | P | 1 | 73 LTS | -0.06 | UTE | LTE | LTE | 116 510 | |
| Bobbin | 8 | 34 | NQI | | 0.29 | 3 | | 84 013 | +27.83 | UTE | LTE | LTE | 87 510 | |
| Bobbin | 8 | 47 | NQI | | 0.38 | P | 1 | 99 008 | +0.59 | UTE | LTE | LTE | 88 510 | |
| Bobbin | 8 | 57 | NQI | | 0.55 | 3 | | 108 015 | +1.88 | UTE | LTE | LTE | 88 510 | |
| Bobbin | | | NQI | | 0.83 | 3 | | 90 015 | +2.43 | UTE | LTE | LTE | 88 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:36:15
 Oconee Nuclear Station - Unit Three
 S/G B
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 2 of 24

ATTACHMENT A-2 - LIST OF IMPERFECTIONS - BOBBIN

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|------|-----|----------|------------------|---------|-----|-------|---------|----------|
| Bobbin | | | | | NQI | 0.27 | P 1 | 49 012 | -0.04 | UTE | LTE | LTE | 88 510 | |
| Bobbin | 9 | 5 | | | NQI | 0.29 | 3 | 107 LTS | +30.29 | UTE | LTE | LTE | 112 510 | |
| Bobbin | | | | | NQI | 0.49 | 3 | 94 LTS | +21.99 | UTE | LTE | LTE | 112 510 | |
| Bobbin | 9 | 17 | | | DWI | 2.44 | 3 | 199 011 | +6.39 | UTE | LTE | LTE | 112 510 | |
| Bobbin | 9 | 23 | | | NQI | 0.64 | P 1 | 124 009 | -0.72 | UTE | LTE | LTE | 112 510 | |
| Bobbin | 9 | 24 | | | NQI | 0.51 | P 1 | 115 010 | +0.45 | UTE | LTE | LTE | 112 510 | |
| Bobbin | 9 | 57 | | | NQI | 0.51 | 3 | 87 002 | +23.52 | UTE | LTE | LTE | 88 510 | |
| Bobbin | 9 | 58 | | | NQI | 0.37 | 3 | 111 015 | +2.31 | UTE | LTE | LTE | 87 510 | |
| Bobbin | 10 | 2 | | | NQI | 0.28 | P 1 | 35 011 | -0.77 | UTE | LTE | LTE | 112 510 | |
| Bobbin | 10 | 7 | | | NQI | 0.53 | P 1 | 133 009 | +0.44 | UTE | LTE | LTE | 112 510 | |
| Bobbin | 10 | 9 | | | NQI | 1.35 | P 1 | 118 009 | -0.72 | UTE | LTE | LTE | 113 510 | |
| Bobbin | 10 | 13 | | | NQI | 0.38 | 3 | 104 015 | +9.95 | UTE | LTE | LTE | 113 510 | |
| Bobbin | 10 | 14 | | | NQI | 0.45 | 3 | 76 011 | +15.44 | UTE | LTE | LTE | 112 510 | |
| Bobbin | 10 | 18 | | | NQI | 0.25 | P 1 | 89 009 | +0.40 | UTE | LTE | LTE | 112 510 | |
| Bobbin | 10 | 25 | | | NQI | 0.61 | P 1 | 126 009 | +0.56 | UTE | LTE | LTE | 113 510 | |
| Bobbin | 10 | 31 | | | ADI | 3.69 | 6 | 89 002 | -2.15 to +5.55 | UTE | LTE | LTE | 113 510 | |
| Bobbin | | | | | ADI | 5.23 | 6 | 92 LTS | +20.66 to +29.07 | UTE | LTE | LTE | 113 510 | |
| Bobbin | 10 | 51 | | | NQI | 0.58 | P 1 | 51 011 | -0.80 | UTE | LTE | LTE | 88 510 | |
| Bobbin | 10 | 59 | | | NQI | 0.72 | 3 | 92 009 | +24.81 | UTE | LTE | LTE | 88 510 | |
| Bobbin | 10 | 65 | | | NQI | 1.88 | 3 | 129 014 | +3.49 | UTE | LTE | LTE | 68 510 | |
| Bobbin | 11 | 5 | | | NQI | 0.28 | 3 | 84 003 | +17.11 | UTE | LTE | LTE | 113 510 | |
| Bobbin | 11 | 10 | | | NQI | 0.24 | 3 | 92 015 | +30.25 | UTE | LTE | LTE | 112 510 | |
| Bobbin | | | | | NQI | 0.45 | 3 | 104 015 | +11.87 | UTE | LTE | LTE | 112 510 | |
| Bobbin | | | | | NQI | 0.55 | 3 | 66 015 | +30.77 | UTE | LTE | LTE | 112 510 | |
| Bobbin | 11 | 11 | | | NQI | 0.59 | P 1 | 128 010 | -0.74 | UTE | LTE | LTE | 113 510 | |
| Bobbin | | | | | NQI | 0.83 | P 1 | 87 009 | -0.76 | UTE | LTE | LTE | 113 510 | |
| Bobbin | 11 | 13 | | | NQI | 0.61 | P 1 | 106 008 | +0.00 | UTE | LTE | LTE | 113 510 | |
| Bobbin | 11 | 20 | | | NQI | 0.74 | 3 | 103 008 | +5.94 | UTE | LTE | LTE | 112 510 | |
| Bobbin | 11 | 21 | | | NQI | 0.50 | 3 | 95 008 | +10.24 | UTE | LTE | LTE | 113 510 | |
| Bobbin | 11 | 60 | | | NQI | 0.55 | 3 | 126 009 | +18.29 to +28.41 | UTE | LTE | LTE | 88 510 | |
| Bobbin | 11 | 65 | | | NQI | 0.93 | P 1 | 91 010 | -1.25 | UTE | LTE | LTE | 88 510 | |
| Bobbin | | | | | NQI | 1.74 | P 1 | 56 015 | -0.36 | UTE | LTE | LTE | 88 510 | |
| Bobbin | 11 | 67 | | | NQI | 0.71 | 3 | 107 014 | +3.26 | UTE | LTE | LTE | 69 510 | |
| Bobbin | 12 | 1 | | | NQI | 0.29 | 3 | 108 014 | +1.32 | UTE | LTE | LTE | 150 510 | |
| Bobbin | 12 | 2 | | | NQI | 0.61 | 3 | 105 010 | -1.42 | UTE | LTE | LTE | 149 510 | |
| Bobbin | 12 | 14 | | | NQI | 0.26 | P 1 | 80 012 | +0.24 | UTE | LTE | LTE | 109 510 | |
| Bobbin | | | | | NQI | 0.67 | P 1 | 124 007 | -0.70 | UTE | LTE | LTE | 109 510 | |
| Bobbin | 12 | 20 | | | NQI | 0.50 | P 1 | 98 009 | +0.42 | UTE | LTE | LTE | 109 510 | |
| Bobbin | 12 | 33 | | | NQI | 0.58 | P 1 | 101 011 | -0.80 | UTE | LTE | LTE | 108 510 | |
| Bobbin | 12 | 58 | | | NQI | 0.76 | P 1 | 112 009 | -0.59 | UTE | LTE | LTE | 87 510 | |
| Bobbin | 12 | 61 | | | NQI | 0.74 | 3 | 31 009 | +12.04 to +25.57 | UTE | LTE | LTE | 88 510 | |
| Bobbin | 12 | 63 | | | NQI | 0.56 | 3 | 86 009 | +23.65 to +30.09 | UTE | LTE | LTE | 88 510 | |
| Bobbin | 12 | 65 | | | NQI | 0.56 | P 1 | 66 010 | -1.14 | UTE | LTE | LTE | 88 510 | |
| Bobbin | 12 | 67 | | | NQI | 0.89 | P 1 | 74 015 | -0.51 | UTE | LTE | LTE | 88 510 | |
| Bobbin | 12 | 68 | | | NQI | 1.07 | 3 | 98 014 | +33.25 | UTE | LTE | LTE | 68 510 | |
| Bobbin | | | | | NQI | 0.51 | P 1 | 78 009 | -0.67 | UTE | LTE | LTE | 68 510 | |
| Bobbin | 12 | 70 | | | ADI | 2.01 | 6 | 91 014 | +1.90 | UTE | LTE | LTE | 69 510 | |
| Bobbin | | | | | NQI | 1.23 | 3 | 116 012 | +5.26 | UTE | LTE | LTE | 69 510 | |
| Bobbin | 12 | 71 | | | NQI | 0.61 | 3 | 92 011 | +10.96 | UTE | LTE | LTE | 68 510 | |
| Bobbin | | | | | NQI | 0.61 | 3 | 112 012 | +1.04 | UTE | LTE | LTE | 68 510 | |
| Bobbin | | | | | NQI | 0.79 | 3 | 105 011 | +12.35 | UTE | LTE | LTE | 68 510 | |
| Bobbin | 13 | 4 | | | NQI | 0.53 | 3 | 97 009 | +38.10 | UTE | LTE | LTE | 149 510 | |
| Bobbin | 13 | 5 | | | NQI | 0.86 | P 1 | 95 010 | -0.65 | UTE | LTE | LTE | 150 510 | |
| Bobbin | 13 | 18 | | | NQI | 0.54 | P 1 | 109 007 | -0.76 | UTE | LTE | LTE | 109 510 | |
| Bobbin | 13 | 19 | | | NQI | 1.27 | P 1 | 125 007 | -0.82 | UTE | LTE | LTE | 108 510 | |
| Bobbin | 13 | 20 | | | NQI | 0.60 | P 1 | 123 007 | -0.80 | UTE | LTE | LTE | 109 510 | |
| Bobbin | 13 | 38 | | | NQI | 0.31 | 3 | 106 001 | +19.28 | UTE | LTE | LTE | 87 510 | |
| Bobbin | 13 | 48 | | | NQI | 0.21 | 3 | 95 009 | +13.27 | UTE | LTE | LTE | 87 510 | |
| Bobbin | 13 | 65 | | | NQI | 0.53 | 3 | 106 009 | +30.07 | UTE | LTE | LTE | 88 510 | |
| Bobbin | | | | | NQI | 0.56 | 3 | 111 009 | +25.27 | UTE | LTE | LTE | 88 510 | |
| Bobbin | | | | | NQI | 0.69 | 3 | 99 009 | +24.32 | UTE | LTE | LTE | 88 510 | |
| Bobbin | 13 | 67 | | | NQI | 0.80 | 3 | 104 009 | +35.37 | UTE | LTE | LTE | 88 510 | |
| Bobbin | 13 | 71 | | | NQI | 1.12 | 3 | 119 009 | +38.44 | UTE | LTE | LTE | 68 510 | |
| Bobbin | | | | | NQI | 1.81 | 3 | 135 009 | +37.37 | UTE | LTE | LTE | 68 510 | |
| Bobbin | 13 | 74 | | | NQI | 0.71 | P 1 | 91 010 | +0.31 | UTE | LTE | LTE | 68 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:36:15
 Oconee Nuclear Station - Unit Three
 S/G B
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 3 of 24

ATTACHMENT A-2 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|------|-------|-----|-----|------------------|---------|---------|-----|-------|-------|----------|
| Bobbin | 14 | 3 | NQI | 0.61 | P 1 | 133 | 010 | -0.59 | UTE | LTE | LTE | 150 | 510 | |
| Bobbin | 14 | 13 | NQI | 0.41 | 3 | 72 | LTS | +7.51 | UTE | LTE | LTE | 108 | 510 | |
| Bobbin | 14 | 55 | NQI | 0.51 | P 1 | 62 | 011 | -0.74 | UTE | LTE | LTE | 88 | 510 | |
| Bobbin | 14 | 61 | NQI | 0.23 | P 1 | 125 | 013 | -0.23 | UTE | LTE | LTE | 88 | 510 | |
| Bobbin | 14 | 65 | NQI | 0.53 | 3 | 102 | 009 | +12.77 to +25.39 | UTE | LTE | LTE | 88 | 510 | |
| Bobbin | 14 | 67 | NQI | 0.60 | 3 | 103 | 009 | +21.42 to +32.37 | UTE | LTE | LTE | 88 | 510 | |
| Bobbin | 14 | 72 | NQI | 0.37 | 3 | 108 | 014 | +31.00 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | 14 | 74 | NQI | 0.29 | 3 | 107 | 014 | +31.10 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | 14 | 75 | NQI | 0.75 | 3 | 105 | 014 | +31.46 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | | | NQI | 2.31 | 3 | 117 | 014 | +30.96 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | | | NQI | 0.64 | P 1 | 97 | 010 | +0.04 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | 15 | 7 | NQI | 0.29 | P 1 | 103 | 010 | +0.08 | UTE | LTE | LTE | 150 | 510 | |
| Bobbin | 15 | 10 | NQI | 0.32 | 3 | 73 | 001 | +25.46 | UTE | LTE | LTE | 109 | 510 | |
| Bobbin | 15 | 64 | NQI | 0.63 | P 1 | 88 | 009 | +0.64 | UTE | LTE | LTE | 87 | 510 | |
| Bobbin | 15 | 65 | NQI | 0.25 | P 1 | 128 | 008 | +0.43 | UTE | LTE | LTE | 88 | 510 | |
| Bobbin | 15 | 67 | NQI | 0.59 | 3 | 95 | 009 | +10.15 to +27.55 | UTE | LTE | LTE | 88 | 510 | |
| Bobbin | 15 | 68 | NQI | 0.76 | 3 | 71 | 009 | +23.52 | UTE | LTE | LTE | 87 | 510 | |
| Bobbin | 15 | 69 | NQI | 0.89 | 3 | 126 | 009 | +21.75 to +34.16 | UTE | LTE | LTE | 88 | 510 | |
| Bobbin | 15 | 71 | NQI | 0.59 | 3 | 140 | 009 | +38.67 | UTE | LTE | LTE | 88 | 510 | |
| Bobbin | 15 | 74 | NQI | 0.87 | 3 | 77 | 009 | +37.42 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | 15 | 76 | NQI | 0.53 | 3 | 116 | 014 | +32.08 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | 15 | 78 | NQI | 1.01 | 3 | 106 | 014 | +31.00 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | | | NQI | 0.57 | P 1 | 67 | 010 | +0.31 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | 16 | 5 | NQI | 0.28 | 3 | 65 | 015 | +17.66 | UTE | LTE | LTE | 149 | 510 | |
| Bobbin | | | NQI | 0.82 | 3 | 105 | 009 | +14.83 | UTE | LTE | LTE | 149 | 510 | |
| Bobbin | 16 | 16 | NQI | 0.33 | 3 | 83 | 014 | +21.77 | UTE | LTE | LTE | 109 | 510 | |
| Bobbin | 16 | 21 | NQI | 0.29 | 3 | 79 | 012 | +27.60 | UTE | LTE | LTE | 109 | 510 | |
| Bobbin | 16 | 42 | NQI | 0.46 | 3 | 38 | 014 | +23.83 | UTE | LTE | LTE | 87 | 510 | |
| Bobbin | 16 | 61 | NQI | 0.30 | 3 | 103 | 013 | +12.37 | UTE | LTE | LTE | 87 | 510 | |
| Bobbin | 16 | 66 | NQI | 0.60 | P 1 | 92 | 009 | +0.65 | UTE | LTE | LTE | 87 | 510 | |
| Bobbin | 16 | 68 | NQI | 0.36 | P 1 | 75 | 009 | -0.16 | UTE | LTE | LTE | 87 | 510 | |
| Bobbin | 16 | 72 | NQI | 0.85 | 3 | 108 | 009 | +24.48 to +32.29 | UTE | LTE | LTE | 88 | 510 | |
| Bobbin | 16 | 73 | NQI | 0.35 | P 1 | 86 | 008 | -0.67 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | 16 | 75 | NQI | 0.40 | 3 | 93 | 009 | +35.80 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | 16 | 79 | NQI | 0.44 | 3 | 98 | 014 | +32.67 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | 16 | 81 | NQI | 3.05 | 3 | 118 | 014 | +32.14 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | 17 | 48 | NQI | 0.21 | 3 | 95 | 001 | +22.96 | UTE | LTE | LTE | 87 | 510 | |
| Bobbin | 17 | 53 | NQI | 0.53 | P 1 | 74 | 011 | -0.80 | UTE | LTE | LTE | 88 | 510 | |
| Bobbin | 17 | 59 | NQI | 0.24 | 3 | 109 | 008 | +11.81 | UTE | LTE | LTE | 88 | 510 | |
| Bobbin | 17 | 72 | NQI | 0.32 | 3 | 104 | 003 | +9.76 | UTE | LTE | LTE | 88 | 510 | |
| Bobbin | | | NQI | 1.21 | 3 | 119 | 009 | +20.24 to +28.11 | UTE | LTE | LTE | 88 | 510 | |
| Bobbin | 17 | 74 | NQI | 0.35 | P 1 | 108 | 008 | -0.76 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | | | NQI | 0.67 | P 1 | 70 | 009 | +0.68 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | | | NQI | 2.08 | 3 | 123 | 009 | +21.21 to +31.22 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | 17 | 75 | NQI | 0.97 | P 1 | 112 | 008 | -0.68 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | | | NQI | 0.52 | 3 | 84 | 009 | +23.79 to +34.09 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | 17 | 77 | NQI | 0.51 | P 1 | 52 | 009 | +0.58 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | | | NQI | 0.77 | P 1 | 52 | 009 | -0.61 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | 17 | 78 | NQI | 0.47 | 3 | 77 | 009 | +37.71 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | 17 | 80 | NQI | 0.88 | 3 | 109 | 010 | +2.75 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | 18 | 2 | NQI | 0.81 | P 1 | 78 | 014 | +0.59 | UTE | LTE | LTE | 149 | 510 | |
| Bobbin | 18 | 4 | NQI | 0.65 | 3 | 118 | 009 | +16.71 | UTE | LTE | LTE | 150 | 510 | |
| Bobbin | 18 | 5 | NQI | 0.21 | P 1 | 93 | 015 | -0.39 | UTE | LTE | LTE | 149 | 510 | |
| Bobbin | 18 | 16 | NQI | 0.41 | 3 | 91 | 004 | +2.72 | UTE | LTE | LTE | 104 | 510 | |
| Bobbin | 18 | 56 | NQI | 0.42 | 3 | 87 | 003 | +2.50 | UTE | LTE | LTE | 87 | 510 | |
| Bobbin | 18 | 62 | ADI | 1.60 | 6 | 80 | 009 | +11.74 | UTE | LTE | LTE | 87 | 510 | |
| Bobbin | 18 | 66 | NQI | 0.53 | 3 | 80 | 013 | +24.14 | UTE | LTE | LTE | 82 | 510 | |
| Bobbin | 18 | 71 | NQI | 0.62 | P 1 | 98 | 008 | +0.62 | UTE | LTE | LTE | 82 | 510 | |
| Bobbin | 18 | 74 | NQI | 0.45 | 3 | 110 | 009 | +21.88 | UTE | LTE | LTE | 82 | 510 | |
| Bobbin | 18 | 75 | NQI | 0.33 | 3 | 83 | 005 | +32.29 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | 18 | 76 | NQI | 0.99 | 3 | 113 | 009 | +20.73 to +30.31 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | 18 | 79 | NQI | 0.54 | P 1 | 104 | 010 | +0.13 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | | | NQI | 0.57 | P 1 | 121 | 010 | +0.56 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | | | NQI | 0.98 | 3 | 112 | 009 | +23.51 to +27.89 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | 18 | 81 | NQI | 0.58 | P 1 | 122 | 009 | +0.56 | UTE | LTE | LTE | 69 | 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:36:15
 Oconee Nuclear Station - Unit Three
 S/G B
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 4 of 24

ATTACHMENT A-2 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | WTW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|------|-----|----------|------------------|---------|-----|-------|-------|----------|
| Bobbin | | | | | NQI | 0.84 | P 1 | 126 009 | -0.59 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | 18 | 83 | | | NQI | 1.19 | 3 | 115 010 | +9.10 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | 19 | 4 | | | NQI | 0.46 | P 1 | 123 009 | +0.58 | UTE | LTE | LTE | 149 | 510 |
| Bobbin | 19 | 5 | | | NQI | 0.59 | P 1 | 139 009 | +0.48 | UTE | LTE | LTE | 150 | 510 |
| Bobbin | 19 | 11 | | | NQI | 0.68 | P 1 | 142 007 | -0.78 | UTE | LTE | LTE | 150 | 510 |
| Bobbin | 19 | 16 | | | NQI | 0.34 | P 1 | 90 UTS | +13.10 | UTE | LTE | LTE | 105 | 510 |
| Bobbin | 19 | 17 | | | NQI | 0.26 | 3 | 84 011 | +6.81 | UTE | LTE | LTE | 104 | 510 |
| Bobbin | 19 | 67 | | | NQI | 0.45 | P 1 | 74 014 | +0.41 | UTE | LTE | LTE | 83 | 510 |
| Bobbin | 19 | 71 | | | NQI | 0.71 | P 1 | 86 013 | +0.82 | UTE | LTE | LTE | 82 | 510 |
| Bobbin | 19 | 77 | | | NQI | 0.57 | P 1 | 110 008 | -0.60 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | 19 | 78 | | | NQI | 0.90 | P 1 | 96 008 | -0.64 | UTE | LTE | LTE | 68 | 510 |
| Bobbin | 19 | 79 | | | NQI | 0.73 | P 1 | 115 008 | -0.58 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | | | | | NQI | 0.62 | 3 | 95 009 | +21.45 to +26.10 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | 19 | 82 | | | NQI | 0.66 | P 1 | 111 009 | +0.73 | UTE | LTE | LTE | 68 | 510 |
| Bobbin | | | | | NQI | 0.90 | P 1 | 104 010 | +0.49 | UTE | LTE | LTE | 68 | 510 |
| Bobbin | 19 | 83 | | | NQI | 0.49 | P 1 | 73 009 | +0.71 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | | | | | NQI | 0.90 | P 1 | 136 009 | -0.63 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | 19 | 86 | | | NQI | 3.55 | P 1 | 135 015 | +0.78 | UTE | LTE | LTE | 68 | 510 |
| Bobbin | 20 | 16 | | | NQI | 1.22 | 3 | 125 010 | +28.71 | UTE | LTE | LTE | 104 | 510 |
| Bobbin | 20 | 19 | | | NQI | 0.49 | 3 | 99 014 | +16.27 | UTE | LTE | LTE | 105 | 510 |
| Bobbin | 20 | 26 | | | NQI | 0.28 | 3 | 83 012 | +13.38 | UTE | LTE | LTE | 104 | 510 |
| Bobbin | 20 | 30 | | | NQI | 0.36 | 3 | 98 011 | +34.93 | UTE | LTE | LTE | 104 | 510 |
| Bobbin | 20 | 73 | | | NQI | 0.53 | P 1 | 81 008 | +0.58 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | 20 | 75 | | | NQI | 0.40 | P 1 | 53 008 | +0.65 | UTE | LTE | LTE | 68 | 510 |
| Bobbin | 20 | 77 | | | NQI | 0.79 | P 1 | 82 008 | -0.62 | UTE | LTE | LTE | 68 | 510 |
| Bobbin | 20 | 78 | | | NQI | 0.69 | P 1 | 110 009 | +0.62 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | | | | | NQI | 1.20 | P 1 | 105 008 | -0.58 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | 20 | 79 | | | NQI | 0.67 | P 1 | 50 008 | +0.76 | UTE | LTE | LTE | 68 | 510 |
| Bobbin | 20 | 80 | | | NQI | 0.54 | 3 | 110 012 | +1.24 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | | | | | NQI | 0.84 | P 1 | 147 009 | -0.70 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | 20 | 81 | | | NQI | 0.69 | P 1 | 81 009 | +0.73 | UTE | LTE | LTE | 68 | 510 |
| Bobbin | 21 | 2 | | | NQI | 0.43 | P 1 | 102 010 | +0.56 | UTE | LTE | LTE | 149 | 510 |
| Bobbin | 21 | 6 | | | NQI | 0.41 | 3 | 103 006 | +5.45 | UTE | LTE | LTE | 149 | 510 |
| Bobbin | 21 | 8 | | | NQI | 0.27 | 3 | 86 012 | +31.30 | UTE | LTE | LTE | 149 | 510 |
| Bobbin | 21 | 11 | | | NQI | 0.19 | P 1 | 72 012 | -0.19 | UTE | LTE | LTE | 150 | 510 |
| Bobbin | 21 | 15 | | | NQI | 1.33 | P 1 | 122 007 | -0.76 | UTE | LTE | LTE | 104 | 510 |
| Bobbin | 21 | 72 | | | NQI | 1.10 | P 1 | 88 011 | -0.76 | UTE | LTE | LTE | 79 | 510 |
| Bobbin | 21 | 77 | | | NQI | 0.53 | P 1 | 84 011 | -0.76 | UTE | LTE | LTE | 78 | 510 |
| Bobbin | 21 | 78 | | | NQI | 0.64 | P 1 | 73 009 | +0.66 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | 21 | 84 | | | NQI | 0.75 | P 1 | 127 008 | -0.58 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | 21 | 85 | | | NQI | 0.52 | P 1 | 98 008 | -0.51 | UTE | LTE | LTE | 68 | 510 |
| Bobbin | | | | | NQI | 0.64 | P 1 | 92 009 | +0.62 | UTE | LTE | LTE | 68 | 510 |
| Bobbin | 22 | 1 | | | NQI | 0.32 | P 1 | 101 011 | -0.64 | UTE | LTE | LTE | 150 | 510 |
| Bobbin | 22 | 20 | | | NQI | 0.25 | 3 | 67 009 | +4.42 | UTE | LTE | LTE | 104 | 510 |
| Bobbin | | | | | NQI | 0.32 | 3 | 77 008 | +26.43 | UTE | LTE | LTE | 104 | 510 |
| Bobbin | | | | | NQI | 0.35 | 3 | 96 008 | +1.56 | UTE | LTE | LTE | 104 | 510 |
| Bobbin | 22 | 70 | | | NQI | 0.66 | P 1 | 89 011 | -0.75 | UTE | LTE | LTE | 75 | 510 |
| Bobbin | 22 | 74 | | | NQI | 0.32 | 3 | 83 LTS | +35.58 | UTE | LTE | LTE | 75 | 510 |
| Bobbin | 22 | 83 | | | NQI | 0.37 | P 1 | 87 009 | +0.64 | UTE | LTE | LTE | 68 | 510 |
| Bobbin | 22 | 86 | | | NQI | 0.46 | P 1 | 82 011 | -0.77 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | 22 | 90 | | | NQI | 0.71 | P 1 | 73 009 | +0.66 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | | | | | NQI | 0.97 | P 1 | 106 009 | -0.75 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | 23 | 35 | | | NQI | 0.36 | 3 | 73 015 | +37.05 | UTE | LTE | LTE | 104 | 510 |
| Bobbin | 23 | 48 | | | NQI | 0.38 | 3 | 67 011 | +25.93 | UTE | LTE | LTE | 74 | 510 |
| Bobbin | 23 | 57 | | | NQI | 0.29 | 3 | 105 015 | +32.63 | UTE | LTE | LTE | 75 | 510 |
| Bobbin | 23 | 79 | | | NQI | 0.31 | 3 | 99 014 | +21.03 | UTE | LTE | LTE | 75 | 510 |
| Bobbin | 23 | 93 | | | NQI | 1.76 | 3 | 114 006 | +1.57 | UTE | LTE | LTE | 68 | 510 |
| Bobbin | 24 | 17 | | | NQI | 0.32 | 3 | 102 014 | +8.45 | UTE | LTE | LTE | 104 | 510 |
| Bobbin | 24 | 19 | | | NQI | 0.27 | 3 | 99 015 | +20.90 | UTE | LTE | LTE | 104 | 510 |
| Bobbin | | | | | NQI | 0.47 | P 1 | 83 007 | -0.47 | UTE | LTE | LTE | 104 | 510 |
| Bobbin | 24 | 37 | ODI | 13 | | 0.80 | P 1 | 99 014 | +0.93 | UTE | LTE | LTE | 104 | 510 |
| Bobbin | 24 | 45 | | | NQI | 0.30 | 3 | 83 009 | +18.81 | UTE | LTE | LTE | 104 | 510 |
| Bobbin | 24 | 74 | | | NQI | 0.54 | 3 | 82 014 | +21.95 | UTE | LTE | LTE | 74 | 510 |
| Bobbin | 24 | 80 | | | NQI | 0.27 | 3 | 98 013 | -1.74 | UTE | LTE | LTE | 69 | 510 |
| Bobbin | 24 | 84 | | | NQI | 0.17 | P 1 | 60 004 | +0.08 | UTE | LTE | LTE | 69 | 510 |

FTI TUBAN II (Version 2.3) 05/09/2000 08:36:15
 Oconee Nuclear Station - Unit Three
 S/G B
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 5 of 24

ATTACHMENT A-2 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|-----|-----|----------|------------------|---------|---------|-----|-------|-------|----------|
| Bobbin | 25 | 3 | NQI | | 0.47 | P 1 | 64 | 009 | +0.66 | UTE | LTE | LTE | 150 | 510 | |
| Bobbin | 25 | 4 | NQI | | 0.61 | P 1 | 67 | 009 | +0.67 | UTE | LTE | LTE | 149 | 510 | |
| Bobbin | 25 | 24 | NQI | | 0.21 | 3 | 95 | 011 | +12.11 | UTE | LTE | LTE | 104 | 510 | |
| Bobbin | | | NQI | | 0.23 | 3 | 103 | 011 | +34.85 | UTE | LTE | LTE | 104 | 510 | |
| Bobbin | | | NQI | | 0.24 | 3 | 95 | 008 | +15.53 | UTE | LTE | LTE | 104 | 510 | |
| Bobbin | | | NQI | | 0.26 | 3 | 67 | 011 | +33.71 | UTE | LTE | LTE | 104 | 510 | |
| Bobbin | | | NQI | | 0.36 | 3 | 82 | 012 | +3.27 | UTE | LTE | LTE | 104 | 510 | |
| Bobbin | 25 | 69 | NQI | | 0.55 | 3 | 102 | 004 | +8.93 | UTE | LTE | LTE | 75 | 510 | |
| Bobbin | 25 | 87 | NQI | | 0.31 | 3 | 67 | 013 | +4.38 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | 25 | 96 | NQI | | 0.44 | 3 | 86 | 012 | +9.03 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | 25 | 97 | NQI | | 0.25 | 3 | 112 | 012 | +9.22 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | | | NQI | | 0.32 | 3 | 114 | 012 | +9.64 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | | | NQI | | 0.45 | 3 | 80 | 012 | +11.03 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | 26 | 3 | NQI | | 0.35 | P 1 | 77 | 009 | -0.80 | UTE | LTE | LTE | 150 | 510 | |
| Bobbin | 26 | 5 | NQI | | 0.44 | P 1 | 111 | 008 | -0.62 | UTE | LTE | LTE | 150 | 510 | |
| Bobbin | 26 | 15 | NQI | | 0.22 | 3 | 46 | 001 | +1.89 | UTE | LTE | LTE | 150 | 510 | |
| Bobbin | | | NQI | | 0.25 | 3 | 108 | 001 | +1.69 | UTE | LTE | LTE | 150 | 510 | |
| Bobbin | 26 | 17 | NQI | | 0.20 | 3 | 108 | 011 | +18.81 | UTE | LTE | LTE | 150 | 510 | |
| Bobbin | | | NQI | | 0.22 | 3 | 105 | 009 | +8.33 | UTE | LTE | LTE | 150 | 510 | |
| Bobbin | 26 | 44 | NQI | | 0.31 | 3 | 82 | 009 | +16.26 | UTE | LTE | LTE | 101 | 510 | |
| Bobbin | 26 | 56 | NQI | | 0.45 | P 1 | 108 | 013 | +0.78 | UTE | LTE | LTE | 74 | 510 | |
| Bobbin | 26 | 87 | NQI | | 0.57 | 3 | 63 | LTS | +19.12 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | | | ODI | 32 | 0.38 | P 1 | 92 | 013 | +1.07 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | 26 | 98 | ODI | 14 | 0.32 | P 1 | 101 | 012 | +1.50 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | 27 | 28 | NQI | | 0.45 | 3 | 77 | 005 | +29.95 | UTE | LTE | LTE | 100 | 510 | |
| Bobbin | 27 | 41 | NQI | | 0.28 | P 1 | 97 | 013 | +0.00 | UTE | LTE | LTE | 101 | 510 | |
| Bobbin | 27 | 78 | NQI | | 0.34 | P 1 | 96 | 004 | -0.74 | UTE | LTE | LTE | 75 | 510 | |
| Bobbin | 27 | 81 | NQI | | 0.72 | 3 | 74 | 015 | +29.61 | UTE | LTE | LTE | 74 | 510 | |
| Bobbin | 27 | 84 | NQI | | 0.20 | P 1 | 81 | 014 | +1.05 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | 27 | 91 | NQI | | 0.37 | 3 | 94 | 013 | +8.22 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | 27 | 100 | NQI | | 0.56 | P 1 | 79 | 010 | +0.78 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | 28 | 5 | NQI | | 0.47 | P 1 | 111 | 008 | -0.56 | UTE | LTE | LTE | 149 | 510 | |
| Bobbin | 28 | 54 | NQI | | 0.21 | 3 | 101 | 011 | +8.59 | UTE | LTE | LTE | 75 | 510 | |
| Bobbin | 28 | 60 | NQI | | 0.31 | P 1 | 108 | 011 | -0.81 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | 28 | 96 | NQI | | 0.68 | 3 | 80 | 010 | +6.27 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | | | NQI | | 0.50 | P 1 | 127 | 013 | +0.78 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | 28 | 98 | NQI | | 0.48 | 3 | 99 | 004 | +26.89 | UTE | LTE | LTE | 68 | 510 | |
| Bobbin | 29 | 1 | NQI | | 0.85 | P 1 | 83 | 015 | -0.37 | UTE | LTE | LTE | 150 | 510 | |
| Bobbin | 29 | 2 | NQI | | 0.66 | P 1 | 108 | 011 | +0.58 | UTE | LTE | LTE | 149 | 510 | |
| Bobbin | 29 | 4 | NQI | | 0.41 | P 1 | 114 | 010 | +0.60 | UTE | LTE | LTE | 149 | 510 | |
| Bobbin | 29 | 5 | NQI | | 0.38 | P 1 | 103 | 009 | +0.68 | UTE | LTE | LTE | 150 | 510 | |
| Bobbin | 29 | 8 | NQI | | 0.34 | 3 | 59 | 003 | +14.78 | UTE | LTE | LTE | 149 | 510 | |
| Bobbin | 29 | 13 | NQI | | 0.72 | P 1 | 75 | LTS | +0.00 | UTE | LTE | LTE | 150 | 510 | |
| Bobbin | 29 | 39 | NQI | | 0.36 | P 1 | 78 | 014 | -0.18 | UTE | LTE | LTE | 101 | 510 | |
| Bobbin | 29 | 49 | NQI | | 0.25 | 3 | 77 | 012 | +19.63 | UTE | LTE | LTE | 101 | 510 | |
| Bobbin | 29 | 67 | NQI | | 0.30 | 3 | 90 | 008 | +22.85 | UTE | LTE | LTE | 72 | 510 | |
| Bobbin | 29 | 76 | NQI | | 0.57 | 3 | 77 | 013 | +6.38 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | 29 | 82 | NQI | | 0.44 | P 1 | 100 | 011 | -0.80 | UTE | LTE | LTE | 73 | 510 | |
| Bobbin | 29 | 83 | NQI | | 1.24 | P 1 | 96 | 011 | -0.75 | UTE | LTE | LTE | 72 | 510 | |
| Bobbin | 29 | 102 | NQI | | 0.36 | 3 | 100 | 013 | +29.50 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | | | NQI | | 0.85 | 3 | 104 | 008 | +8.81 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | | | NQI | | 1.19 | 3 | 112 | 008 | +7.01 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | | | NQI | | 1.58 | 3 | 99 | 008 | +6.38 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | | | NQI | | 0.47 | 3 | 98 | 011 | +18.23 to +21.32 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | 30 | 1 | NQI | | 1.16 | P 1 | 93 | 015 | -0.45 | UTE | LTE | LTE | 150 | 510 | |
| Bobbin | 30 | 4 | NQI | | 0.33 | P 1 | 83 | 008 | +0.60 | UTE | LTE | LTE | 150 | 510 | |
| Bobbin | | | NQI | | 0.39 | P 1 | 109 | 010 | -0.58 | UTE | LTE | LTE | 150 | 510 | |
| Bobbin | 30 | 6 | NQI | | 0.51 | P 1 | 96 | 008 | -0.51 | UTE | LTE | LTE | 150 | 510 | |
| Bobbin | 30 | 21 | NQI | | 0.74 | P 1 | 147 | 007 | -0.75 | UTE | LTE | LTE | 149 | 510 | |
| Bobbin | 30 | 26 | NQI | | 0.28 | 3 | 95 | 008 | +21.99 | UTE | LTE | LTE | 100 | 510 | |
| Bobbin | 30 | 38 | NQI | | 0.53 | 3 | 63 | 003 | +5.04 | UTE | LTE | LTE | 100 | 510 | |
| Bobbin | 30 | 51 | NQI | | 0.29 | P 1 | 82 | 004 | -1.00 | UTE | LTE | LTE | 101 | 510 | |
| Bobbin | 30 | 57 | NQI | | 0.35 | 3 | 102 | 007 | +20.41 | UTE | LTE | LTE | 72 | 510 | |
| Bobbin | 30 | 86 | NQI | | 0.44 | 3 | 79 | 012 | +12.02 | UTE | LTE | LTE | 69 | 510 | |
| Bobbin | 30 | 103 | NQI | | 0.57 | P 1 | 94 | 008 | -0.47 | UTE | LTE | LTE | 64 | 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:36:15
 Oconee Nuclear Station - Unit Three
 S/G B
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 6 of 24

ATTACHMENT A-2 - LIST OF IMPERFECTIONS - BOBBIN

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|-----|-----|----------|----------------|---------|-----|-------|-------|----------|
| Bobbin | 30 | 104 | NQI | | 0.64 | P 1 | 81 | 008 | -0.58 | UTE | LTE | LTE | 64 | 510 |
| Bobbin | | | NQI | | 0.77 | P 1 | 119 | 010 | +0.56 | UTE | LTE | LTE | 64 | 510 |
| Bobbin | 31 | 6 | NQI | | 0.44 | 3 | 48 | 009 | +38.12 | UTE | LTE | LTE | 149 | 510 |
| Bobbin | | | NQI | | 1.01 | 3 | 109 | 010 | +14.52 | UTE | LTE | LTE | 149 | 510 |
| Bobbin | 31 | 8 | NQI | | 0.56 | P 1 | 79 | 009 | +0.59 | UTE | LTE | LTE | 149 | 510 |
| Bobbin | 31 | 26 | NQI | | 0.29 | 3 | 79 | 009 | -1.43 | UTE | LTE | LTE | 101 | 510 |
| Bobbin | 31 | 76 | NQI | | 0.27 | 3 | 79 | 011 | +2.03 | UTE | LTE | LTE | 72 | 510 |
| Bobbin | | | NQI | | 0.74 | P 1 | 105 | 011 | -0.81 | UTE | LTE | LTE | 72 | 510 |
| Bobbin | 31 | 85 | NQI | | 0.37 | 3 | 96 | 014 | +11.34 | UTE | LTE | LTE | 73 | 510 |
| Bobbin | 31 | 104 | NQI | | 0.69 | 3 | 109 | 014 | +1.27 | UTE | LTE | LTE | 64 | 510 |
| Bobbin | 32 | 2 | NQI | | 1.20 | 3 | 129 | 009 | +38.16 | UTE | LTE | LTE | 150 | 510 |
| Bobbin | 32 | 4 | NQI | | 0.43 | 3 | 111 | 005 | +1.92 | UTE | LTE | LTE | 150 | 510 |
| Bobbin | 32 | 5 | NQI | | 0.67 | P 1 | 83 | 009 | +0.67 | UTE | LTE | LTE | 149 | 510 |
| Bobbin | 32 | 15 | NQI | | 0.69 | P 1 | 157 | 007 | -0.80 | UTE | LTE | LTE | 149 | 510 |
| Bobbin | 32 | 24 | NQI | | 0.26 | 3 | 100 | 014 | +23.45 | UTE | LTE | LTE | 101 | 510 |
| Bobbin | 32 | 58 | NQI | | 0.31 | 3 | 103 | 010 | +33.55 | UTE | LTE | LTE | 72 | 510 |
| Bobbin | 32 | 60 | NQI | | 0.12 | P 1 | 124 | 013 | -0.08 | UTE | LTE | LTE | 72 | 510 |
| Bobbin | 32 | 61 | NQI | | 0.30 | 3 | 90 | 007 | +6.82 | UTE | LTE | LTE | 73 | 510 |
| Bobbin | 32 | 62 | NQI | | 0.18 | P 1 | 110 | 013 | +0.00 | UTE | LTE | LTE | 72 | 510 |
| Bobbin | 32 | 86 | NQI | | 0.50 | 3 | 106 | LTS | +41.86 | UTE | LTE | LTE | 64 | 510 |
| Bobbin | 33 | 1 | NQI | | 0.29 | 3 | 80 | 002 | +25.60 | UTE | LTE | LTE | 146 | 510 |
| Bobbin | 33 | 2 | NQI | | 0.54 | 3 | 108 | 009 | +38.05 | UTE | LTE | LTE | 145 | 510 |
| Bobbin | | | NQI | | 0.41 | P 1 | 103 | 014 | +0.21 | UTE | LTE | LTE | 145 | 510 |
| Bobbin | 33 | 4 | NQI | | 0.89 | P 1 | 111 | 010 | -0.61 | UTE | LTE | LTE | 145 | 510 |
| Bobbin | 33 | 5 | NQI | | 0.50 | P 1 | 75 | 009 | +0.63 | UTE | LTE | LTE | 146 | 510 |
| Bobbin | 33 | 6 | NQI | | 0.46 | 3 | 100 | 009 | +14.55 | UTE | LTE | LTE | 145 | 510 |
| Bobbin | | | NQI | | 0.58 | P 1 | 98 | 008 | -0.44 | UTE | LTE | LTE | 145 | 510 |
| Bobbin | 33 | 30 | NQI | | 0.92 | P 1 | 87 | 013 | -0.14 | UTE | LTE | LTE | 100 | 510 |
| Bobbin | 33 | 39 | NQI | | 0.53 | 3 | 56 | 011 | +32.03 | UTE | LTE | LTE | 101 | 510 |
| Bobbin | 33 | 81 | NQI | | 0.58 | 3 | 97 | 011 | +28.22 | UTE | LTE | LTE | 73 | 510 |
| Bobbin | | | NQI | | 0.41 | P 1 | 113 | 011 | -0.79 | UTE | LTE | LTE | 73 | 510 |
| Bobbin | 33 | 107 | NQI | | 0.37 | 3 | 66 | 005 | +1.14 | UTE | LTE | LTE | 64 | 510 |
| Bobbin | 34 | 1 | NQI | | 1.27 | 3 | 128 | 014 | +32.59 | UTE | LTE | LTE | 146 | 510 |
| Bobbin | 34 | 3 | ADI | | 1.37 | 6 | 53 | 010 | +2.64 | UTE | LTE | LTE | 146 | 510 |
| Bobbin | 34 | 6 | NQI | | 0.33 | P 1 | 50 | 009 | +0.65 | UTE | LTE | LTE | 145 | 510 |
| Bobbin | | | NQI | | 0.58 | P 1 | 81 | 008 | -0.50 | UTE | LTE | LTE | 145 | 510 |
| Bobbin | 34 | 20 | NQI | | 1.08 | P 1 | 104 | 012 | +0.85 | UTE | LTE | LTE | 145 | 510 |
| Bobbin | 34 | 22 | NQI | | 0.57 | 3 | 89 | 011 | +4.77 | UTE | LTE | LTE | 145 | 510 |
| Bobbin | 34 | 23 | NQI | | 0.65 | P 1 | 122 | 007 | -0.76 | UTE | LTE | LTE | 100 | 510 |
| Bobbin | 34 | 43 | NQI | | 0.60 | P 1 | 111 | LTE | +4.24 | UTE | LTE | LTE | 100 | 510 |
| Bobbin | 34 | 57 | NQI | | 0.47 | 3 | 72 | 008 | +16.06 | UTE | LTE | LTE | 72 | 510 |
| Bobbin | 34 | 91 | NQI | | 0.49 | 3 | 99 | 014 | +1.41 | UTE | LTE | LTE | 65 | 510 |
| Bobbin | 35 | 6 | NQI | | 0.30 | P 1 | 70 | 008 | -0.51 | UTE | LTE | LTE | 146 | 510 |
| Bobbin | 35 | 7 | NQI | | 0.54 | 3 | 113 | 009 | +4.15 | UTE | LTE | LTE | 145 | 510 |
| Bobbin | 35 | 8 | NQI | | 0.55 | P 1 | 91 | 008 | -0.68 | UTE | LTE | LTE | 146 | 510 |
| Bobbin | 35 | 56 | NQI | | 1.02 | 3 | 111 | 010 | +13.60 | UTE | LTE | LTE | 73 | 510 |
| Bobbin | 35 | 73 | NQI | | 0.44 | P 1 | 87 | 013 | -0.22 | UTE | LTE | LTE | 72 | 510 |
| Bobbin | 35 | 89 | NQI | | 0.36 | P 1 | 129 | 015 | +0.71 | UTE | LTE | LTE | 64 | 510 |
| Bobbin | 35 | 108 | ODI | 14 | 0.65 | P 1 | 91 | 008 | +0.52 | UTE | LTE | LTE | 65 | 510 |
| Bobbin | 36 | 5 | ADI | | 1.76 | 6 | 74 | 010 | +1.79 to +5.67 | UTE | LTE | LTE | 146 | 510 |
| Bobbin | 36 | 8 | NQI | | 1.06 | P 1 | 78 | 008 | -0.57 | UTE | LTE | LTE | 146 | 510 |
| Bobbin | 36 | 9 | NQI | | 0.53 | P 1 | 102 | 008 | -0.69 | UTE | LTE | LTE | 145 | 510 |
| Bobbin | 36 | 17 | NQI | | 0.35 | 3 | 103 | 015 | +19.83 | UTE | LTE | LTE | 145 | 510 |
| Bobbin | 36 | 20 | NQI | | 2.52 | 3 | 17 | 007 | +38.03 | UTE | LTE | LTE | 146 | 510 |
| Bobbin | 36 | 74 | NQI | | 0.25 | 3 | 101 | 010 | +24.66 | UTE | LTE | LTE | 73 | 510 |
| Bobbin | 36 | 82 | NQI | | 0.32 | P 1 | 116 | 014 | +0.41 | UTE | LTE | LTE | 73 | 510 |
| Bobbin | 36 | 85 | NQI | | 0.71 | 3 | 64 | 006 | +16.11 | UTE | LTE | LTE | 72 | 510 |
| Bobbin | 36 | 109 | NQI | | 0.66 | P 1 | 87 | 009 | +0.63 | UTE | LTE | LTE | 64 | 510 |
| Bobbin | 36 | 110 | NQI | | 0.62 | 3 | 72 | 014 | +1.02 | UTE | LTE | LTE | 65 | 510 |
| Bobbin | 37 | 20 | NQI | | 0.66 | 3 | 107 | LTS | +13.07 | UTE | LTE | LTE | 145 | 510 |
| Bobbin | 37 | 25 | NQI | | 0.33 | 3 | 99 | 010 | +30.39 | UTE | LTE | LTE | 145 | 510 |
| Bobbin | 37 | 32 | NQI | | 0.22 | 3 | 90 | 008 | +15.05 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | | | NQI | | 0.23 | 3 | 67 | 008 | +24.86 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | | | NQI | | 0.24 | 3 | 95 | 008 | +27.64 | UTE | LTE | LTE | 153 | 510 |
| Bobbin | | | NQI | | 0.36 | 3 | 87 | 010 | +1.56 | UTE | LTE | LTE | 153 | 510 |

FTI TUBAN II (Version 2.3) 05/09/2000 08:36:15
 Oconee Nuclear Station - Unit Three
 S/G B
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 7 of 24

ATTACHMENT A-2 - LIST OF IMPERFECTIONS - BOBBIN

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|-----|-----|----------|---------|---------|-----|-------|-------|----------|
| Bobbin | 37 | 107 | NQI | | 0.33 | 3 | | 103 001 | +6.22 | UTE | LTE | LTE | 65 | 510 |
| Bobbin | 37 | 114 | NQI | | 0.47 | P 1 | | 99 008 | -0.20 | UTE | LTE | LTE | 65 | 510 |
| Bobbin | 38 | 5 | NQI | | 0.49 | P 1 | | 54 008 | -0.43 | UTE | LTE | LTE | 155 | 510 |
| Bobbin | | | NQI | | 0.94 | P 1 | | 45 009 | +0.65 | UTE | LTE | LTE | 155 | 510 |
| Bobbin | 38 | 7 | NQI | | 0.87 | P 1 | | 48 012 | +0.95 | UTE | LTE | LTE | 155 | 510 |
| Bobbin | 38 | 8 | NQI | | 0.61 | P 1 | | 128 008 | -0.66 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 38 | 19 | NQI | | 0.57 | 3 | | 39 011 | +4.95 | UTE | LTE | LTE | 155 | 510 |
| Bobbin | 38 | 24 | NQI | | 0.36 | 3 | | 95 010 | +30.43 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 38 | 34 | NQI | | 0.49 | P 1 | | 91 013 | +0.48 | UTE | LTE | LTE | 124 | 510 |
| Bobbin | 38 | 46 | NQI | | 0.27 | 3 | | 111 008 | +10.73 | UTE | LTE | LTE | 124 | 510 |
| Bobbin | 38 | 61 | NQI | | 0.28 | 3 | | 85 015 | +25.33 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | 38 | 62 | NQI | | 0.35 | P 1 | | 63 LTE | +17.77 | UTE | LTE | LTE | 29 | 510 |
| Bobbin | 38 | 73 | NQI | | 0.27 | 3 | | 98 010 | +15.91 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | 38 | 100 | NQI | | 0.42 | 3 | | 54 012 | +33.39 | UTE | LTE | LTE | 44 | 510 |
| Bobbin | 38 | 103 | ODI | 10 | 0.34 | 3 | | 109 013 | +9.92 | UTE | LTE | LTE | 43 | 510 |
| Bobbin | 38 | 115 | NQI | | 0.55 | P 1 | | 106 008 | -0.70 | UTE | LTE | LTE | 58 | 510 |
| Bobbin | 39 | 6 | NQI | | 0.44 | P 1 | | 92 010 | +0.62 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 39 | 7 | NQI | | 0.28 | 3 | | 98 010 | +26.03 | UTE | LTE | LTE | 155 | 510 |
| Bobbin | | | NQI | | 0.55 | 3 | | 130 013 | +22.18 | UTE | LTE | LTE | 155 | 510 |
| Bobbin | | | NQI | | 0.32 | P 1 | | 44 013 | -0.17 | UTE | LTE | LTE | 155 | 510 |
| Bobbin | 39 | 10 | NQI | | 0.42 | P 1 | | 77 008 | +0.64 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | | | NQI | | 0.44 | P 1 | | 76 009 | +0.56 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | | | NQI | | 0.78 | P 1 | | 141 008 | -0.76 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 39 | 17 | NQI | | 0.33 | 3 | | 61 001 | +4.02 | UTE | LTE | LTE | 155 | 510 |
| Bobbin | 39 | 51 | NQI | | 5.51 | 3 | | 14 LTS | +36.08 | UTE | LTE | LTE | 125 | 510 |
| Bobbin | | | NQI | | 9.04 | 3 | | 13 LTS | +37.14 | UTE | LTE | LTE | 125 | 510 |
| Bobbin | 39 | 79 | NQI | | 0.83 | 3 | | 54 006 | +11.81 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | 40 | 4 | NQI | | 1.11 | P 1 | | 75 009 | +0.65 | UTE | LTE | LTE | 155 | 510 |
| Bobbin | 40 | 5 | NQI | | 0.54 | 3 | | 109 010 | +2.92 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | | | NQI | | 0.33 | P 1 | | 83 010 | +0.12 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | | | NQI | | 0.34 | P 1 | | 96 010 | +0.62 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 40 | 6 | NQI | | 0.61 | P 1 | | 43 009 | +0.18 | UTE | LTE | LTE | 155 | 510 |
| Bobbin | 40 | 7 | NQI | | 0.46 | P 1 | | 115 010 | +0.49 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 40 | 8 | NQI | | 0.59 | P 1 | | 169 008 | -0.68 | UTE | LTE | LTE | 155 | 510 |
| Bobbin | 40 | 53 | NQI | | 0.36 | 3 | | 96 007 | +13.89 | UTE | LTE | LTE | 124 | 510 |
| Bobbin | 40 | 80 | NQI | | 2.53 | 3 | | 115 015 | +8.51 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | 40 | 115 | NQI | | 0.52 | P 1 | | 84 008 | -0.80 | UTE | LTE | LTE | 43 | 510 |
| Bobbin | 40 | 117 | NQI | | 0.30 | 3 | | 78 015 | +26.43 | UTE | LTE | LTE | 44 | 510 |
| Bobbin | 41 | 4 | NQI | | 0.57 | P 1 | | 48 012 | -0.33 | UTE | LTE | LTE | 155 | 510 |
| Bobbin | 41 | 5 | NQI | | 0.61 | P 1 | | 113 010 | +0.47 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 41 | 55 | ODI | 12 | 0.26 | 3 | | 108 003 | +22.38 | UTE | LTE | LTE | 125 | 510 |
| Bobbin | 41 | 63 | NQI | | 0.36 | 3 | | 85 006 | +13.50 | UTE | LTE | LTE | 29 | 510 |
| Bobbin | 41 | 75 | NQI | | 0.27 | 3 | | 87 009 | +4.37 | UTE | LTE | LTE | 29 | 510 |
| Bobbin | 41 | 78 | NQI | | 0.27 | 3 | | 106 008 | +14.58 | UTE | LTE | LTE | 30 | 510 |
| Bobbin | 41 | 102 | NQI | | 0.25 | 3 | | 70 013 | +4.76 | UTE | LTE | LTE | 44 | 510 |
| Bobbin | 41 | 113 | NQI | | 0.75 | P 1 | | 84 008 | +0.57 | UTE | LTE | LTE | 43 | 510 |
| Bobbin | 41 | 114 | NQI | | 0.43 | 3 | | 85 008 | +29.18 | UTE | LTE | LTE | 44 | 510 |
| Bobbin | 42 | 4 | NQI | | 0.24 | P 1 | | 99 010 | +0.37 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | | | NQI | | 0.48 | P 1 | | 89 009 | +0.70 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 42 | 5 | NQI | | 0.53 | P 1 | | 50 009 | -0.04 | UTE | LTE | LTE | 155 | 510 |
| Bobbin | | | NQI | | 0.53 | P 1 | | 138 010 | +0.54 | UTE | LTE | LTE | 155 | 510 |
| Bobbin | 42 | 14 | NQI | | 0.44 | 3 | | 97 005 | +32.79 | UTE | LTE | LTE | 155 | 510 |
| Bobbin | 42 | 37 | NQI | | 0.32 | 3 | | 112 013 | +18.74 | UTE | LTE | LTE | 124 | 510 |
| Bobbin | 42 | 48 | NQI | | 0.40 | 3 | | 72 005 | +20.01 | UTE | LTE | LTE | 125 | 510 |
| Bobbin | 42 | 52 | NQI | | 0.27 | 3 | | 90 015 | +19.25 | UTE | LTE | LTE | 125 | 510 |
| Bobbin | 42 | 72 | NQI | | 0.32 | 3 | | 99 006 | +29.05 | UTE | LTE | LTE | 51 | 510 |
| Bobbin | 42 | 114 | NQI | | 0.55 | 3 | | 67 011 | +25.99 | UTE | LTE | LTE | 44 | 510 |
| Bobbin | | | NQI | | 0.57 | 3 | | 110 011 | +1.43 | UTE | LTE | LTE | 44 | 510 |
| Bobbin | 42 | 116 | NQI | | 0.35 | 3 | | 107 002 | +21.91 | UTE | LTE | LTE | 44 | 510 |
| Bobbin | 42 | 117 | NQI | | 0.37 | P 1 | | 48 008 | +0.29 | UTE | LTE | LTE | 44 | 510 |
| Bobbin | 43 | 1 | NQI | | 0.29 | 3 | | 108 012 | +19.82 | UTE | LTE | LTE | 159 | 510 |
| Bobbin | 43 | 3 | NQI | | 1.06 | 3 | | 114 014 | +1.19 | UTE | LTE | LTE | 159 | 510 |
| Bobbin | 43 | 4 | NQI | | 0.96 | P 1 | | 95 014 | +0.99 | UTE | LTE | LTE | 158 | 510 |
| Bobbin | 43 | 6 | NQI | | 0.48 | P 1 | | 88 008 | +0.48 | UTE | LTE | LTE | 158 | 510 |
| Bobbin | 43 | 7 | NQI | | 0.78 | P 1 | | 72 008 | +0.66 | UTE | LTE | LTE | 159 | 510 |

FTI TUBAN II (Version 2.3) 05/09/2000 08:36:15
 Oconee Nuclear Station - Unit Three
 S/G B
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 8 of 24

ATTACHMENT A-2 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|-----|-----|----------|------------------|---------|-----|-------|-------|----------|
| Bobbin | 43 | 21 | NQI | | 0.30 | 3 | 88 | 010 | +17.86 | UTE | LTE | LTE | 155 | 510 |
| Bobbin | | | NQI | | 0.51 | 3 | 87 | 006 | +27.47 | UTE | LTE | LTE | 155 | 510 |
| Bobbin | 43 | 22 | NQI | | 0.26 | 3 | 91 | 014 | +1.16 | UTE | LTE | LTE | 154 | 510 |
| Bobbin | 43 | 86 | NQI | | 0.24 | 3 | 106 | 014 | +26.28 | UTE | LTE | LTE | 26 | 510 |
| Bobbin | | | NQI | | 0.34 | P 1 | 63 | 010 | +0.03 | UTE | LTE | LTE | 26 | 510 |
| Bobbin | 43 | 115 | NQI | | 0.64 | P 1 | 118 | 008 | +0.57 | UTE | LTE | LTE | 43 | 510 |
| Bobbin | 43 | 117 | NQI | | 0.49 | P 1 | 105 | 008 | -0.53 | UTE | LTE | LTE | 43 | 510 |
| Bobbin | 44 | 3 | NQI | | 0.93 | P 1 | 52 | 009 | +0.77 | UTE | LTE | LTE | 159 | 510 |
| Bobbin | 44 | 16 | NQI | | 0.36 | 3 | 93 | 005 | +25.16 | UTE | LTE | LTE | 158 | 510 |
| Bobbin | 44 | 35 | NQI | | 0.28 | 3 | 98 | 014 | +23.44 | UTE | LTE | LTE | 125 | 510 |
| Bobbin | 44 | 114 | NQI | | 0.49 | P 1 | 126 | 006 | -0.58 | UTE | LTE | LTE | 43 | 510 |
| Bobbin | 45 | 1 | NQI | | 0.34 | P 1 | 125 | 014 | -0.81 | UTE | LTE | LTE | 159 | 510 |
| Bobbin | 45 | 5 | NQI | | 0.45 | P 1 | 107 | 009 | +0.67 | UTE | LTE | LTE | 159 | 510 |
| Bobbin | 45 | 22 | NQI | | 0.30 | 3 | 97 | 001 | +3.94 | UTE | LTE | LTE | 158 | 510 |
| Bobbin | 45 | 32 | NQI | | 0.21 | 3 | 107 | 008 | +28.39 | UTE | LTE | LTE | 124 | 510 |
| Bobbin | 45 | 34 | NQI | | 0.29 | 3 | 101 | 013 | +34.36 | UTE | LTE | LTE | 124 | 510 |
| Bobbin | 45 | 36 | NQI | | 0.24 | 3 | 97 | 012 | +18.19 | UTE | LTE | LTE | 124 | 510 |
| Bobbin | 45 | 42 | NQI | | 0.27 | 3 | 69 | LTS | +42.58 | UTE | LTE | LTE | 124 | 510 |
| Bobbin | | | NQI | | 0.35 | 3 | 113 | LTS | +42.06 | UTE | LTE | LTE | 124 | 510 |
| Bobbin | 45 | 62 | NQI | | 0.40 | 3 | 84 | 009 | +18.14 | UTE | LTE | LTE | 26 | 510 |
| Bobbin | 45 | 88 | ODI | 20 | 0.34 | 3 | 102 | 007 | +32.12 | UTE | LTE | LTE | 25 | 510 |
| Bobbin | 45 | 89 | NQI | | 0.39 | 3 | 67 | 013 | +13.39 | UTE | LTE | LTE | 26 | 510 |
| Bobbin | 45 | 119 | NQI | | 0.68 | P 1 | 111 | 008 | -0.60 | UTE | LTE | LTE | 43 | 510 |
| Bobbin | 46 | 4 | ODI | 25 | 1.62 | P 1 | 94 | 010 | +0.64 | UTE | LTE | LTE | 158 | 510 |
| Bobbin | 46 | 26 | NQI | | 1.12 | P 1 | 53 | 014 | +0.78 | UTE | LTE | LTE | 158 | 510 |
| Bobbin | 46 | 50 | NQI | | 0.30 | 3 | 88 | 013 | +7.26 | UTE | LTE | LTE | 129 | 510 |
| Bobbin | | | NQI | | 0.82 | 3 | 127 | 008 | +22.18 | UTE | LTE | LTE | 129 | 510 |
| Bobbin | 46 | 53 | NQI | | 0.36 | 3 | 94 | 002 | +32.63 | UTE | LTE | LTE | 133 | 510 |
| Bobbin | 46 | 65 | NQI | | 0.42 | 3 | 95 | 002 | +10.96 | UTE | LTE | LTE | 26 | 510 |
| Bobbin | 46 | 76 | NQI | | 0.45 | 3 | 81 | 007 | +30.42 | UTE | LTE | LTE | 25 | 510 |
| Bobbin | 46 | 83 | NQI | | 0.32 | 3 | 77 | LTS | +18.21 | UTE | LTE | LTE | 26 | 510 |
| Bobbin | 46 | 95 | NQI | | 0.48 | P 1 | 83 | 014 | -0.52 | UTE | LTE | LTE | 44 | 510 |
| Bobbin | 46 | 99 | NQI | | 0.91 | P 1 | 76 | 011 | -0.74 | UTE | LTE | LTE | 44 | 510 |
| Bobbin | 47 | 4 | ODI | 22 | 1.21 | P 1 | 91 | 010 | +0.62 | UTE | LTE | LTE | 158 | 510 |
| Bobbin | 47 | 8 | NQI | | 0.37 | 3 | 86 | 014 | +5.47 | UTE | LTE | LTE | 158 | 510 |
| Bobbin | 47 | 32 | NQI | | 0.23 | 3 | 95 | 011 | +34.39 | UTE | LTE | LTE | 129 | 510 |
| Bobbin | 47 | 46 | NQI | | 0.36 | P 1 | 105 | 014 | +0.41 | UTE | LTE | LTE | 133 | 510 |
| Bobbin | 47 | 75 | NQI | | 0.19 | 3 | 110 | 011 | +3.00 | UTE | LTE | LTE | 25 | 510 |
| Bobbin | | | NQI | | 0.20 | 3 | 84 | 009 | +21.01 | UTE | LTE | LTE | 25 | 510 |
| Bobbin | | | NQI | | 0.21 | 3 | 90 | 010 | +16.41 | UTE | LTE | LTE | 25 | 510 |
| Bobbin | | | NQI | | 0.27 | 3 | 67 | 007 | +23.54 | UTE | LTE | LTE | 25 | 510 |
| Bobbin | | | NQI | | 0.30 | 3 | 98 | 010 | +4.30 | UTE | LTE | LTE | 25 | 510 |
| Bobbin | | | NQI | | 0.34 | 3 | 111 | 012 | +31.77 | UTE | LTE | LTE | 25 | 510 |
| Bobbin | | | NQI | | 0.36 | 3 | 92 | 008 | +26.83 | UTE | LTE | LTE | 25 | 510 |
| Bobbin | | | NQI | | 0.40 | 3 | 86 | 009 | +30.75 | UTE | LTE | LTE | 25 | 510 |
| Bobbin | | | NQI | | 0.50 | 3 | 125 | 012 | +8.42 | UTE | LTE | LTE | 25 | 510 |
| Bobbin | 47 | 85 | NQI | | 0.29 | 3 | 89 | 014 | +22.49 | UTE | LTE | LTE | 25 | 510 |
| Bobbin | 47 | 90 | NQI | | 0.16 | 3 | 83 | 013 | +24.44 | UTE | LTE | LTE | 26 | 510 |
| Bobbin | 47 | 93 | NQI | | 0.29 | 3 | 81 | 010 | +13.46 | UTE | LTE | LTE | 25 | 510 |
| Bobbin | 47 | 103 | NQI | | 0.39 | P 1 | 83 | 012 | +0.38 | UTE | LTE | LTE | 43 | 510 |
| Bobbin | 47 | 105 | NQI | | 0.31 | 3 | 85 | 014 | +2.12 | UTE | LTE | LTE | 43 | 510 |
| Bobbin | 47 | 114 | NQI | | 1.07 | P 1 | 51 | UTS | +13.22 | UTE | LTE | LTE | 44 | 510 |
| Bobbin | 47 | 117 | ODI | 20 | 0.34 | 3 | 103 | 015 | +12.51 | UTE | LTE | LTE | 43 | 510 |
| Bobbin | 47 | 122 | NQI | | 1.07 | 3 | 106 | 015 | +18.76 | UTE | LTE | LTE | 44 | 510 |
| Bobbin | 48 | 3 | NQI | | 0.71 | P 1 | 65 | 009 | +0.59 | UTE | LTE | LTE | 159 | 510 |
| Bobbin | 48 | 29 | NQI | | 0.30 | 3 | 109 | 008 | +22.97 | UTE | LTE | LTE | 159 | 510 |
| Bobbin | 48 | 44 | NQI | | 0.51 | P 1 | 98 | 014 | +0.42 | UTE | LTE | LTE | 129 | 510 |
| Bobbin | 48 | 63 | NQI | | 0.19 | P 1 | 66 | 014 | +0.07 | UTE | LTE | LTE | 26 | 510 |
| Bobbin | 48 | 95 | NQI | | 0.37 | 3 | 48 | 013 | +10.80 | UTE | LTE | LTE | 44 | 510 |
| Bobbin | 49 | 5 | NQI | | 0.72 | 3 | 77 | 009 | +14.33 to +30.84 | UTE | LTE | LTE | 158 | 510 |
| Bobbin | 49 | 48 | ODI | 22 | 0.40 | 3 | 102 | 013 | +25.20 | UTE | LTE | LTE | 133 | 510 |
| Bobbin | 49 | 56 | NQI | | 0.33 | 3 | 102 | 013 | +32.12 | UTE | LTE | LTE | 141 | 510 |
| Bobbin | 49 | 73 | NQI | | 0.17 | P 1 | 64 | 014 | -0.38 | UTE | LTE | LTE | 26 | 510 |
| Bobbin | 49 | 76 | NQI | | 0.29 | P 1 | 108 | 014 | +0.24 | UTE | LTE | LTE | 25 | 510 |
| Bobbin | 49 | 82 | NQI | | 0.33 | 3 | 77 | LTS | +18.74 | UTE | LTE | LTE | 25 | 510 |

FTI TUBAN II (Version 2.3) 05/09/2000 08:36:15
 Oconee Nuclear Station - Unit Three
 S/G B
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 9 of 24

ATTACHMENT A-2 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|------|-----|----------|------------------|---------|-----|-------|-------|----------|
| Bobbin | | | | | NQI | 0.35 | 3 | 101 LTS | +30.25 | UTE | LTE | LTE | 25 | 510 |
| Bobbin | 49 | 105 | | | NQI | 0.27 | 3 | 108 LTS | +29.26 | UTE | LTE | LTE | 44 | 510 |
| Bobbin | 49 | 113 | | | NQI | 0.89 | P 1 | 130 011 | +0.74 | UTE | LTE | LTE | 43 | 510 |
| Bobbin | 49 | 114 | ODI | 23 | 1.41 | P 1 | 88 | 011 | +1.47 | UTE | LTE | LTE | 44 | 510 |
| Bobbin | 49 | 121 | | | NQI | 0.37 | 3 | 63 013 | +1.65 | UTE | LTE | LTE | 44 | 510 |
| Bobbin | 50 | 3 | | | NQI | 0.85 | P 1 | 79 009 | +0.61 | UTE | LTE | LTE | 159 | 510 |
| Bobbin | | | | | NQI | 0.52 | 3 | 94 009 | +16.11 to +25.99 | UTE | LTE | LTE | 159 | 510 |
| Bobbin | 50 | 11 | | | NQI | 0.30 | 3 | 94 011 | +26.45 | UTE | LTE | LTE | 159 | 510 |
| Bobbin | | | | | NQI | 0.34 | 3 | 92 008 | +7.78 | UTE | LTE | LTE | 159 | 510 |
| Bobbin | 50 | 29 | | | NQI | 0.34 | 3 | 92 013 | +31.21 | UTE | LTE | LTE | 159 | 510 |
| Bobbin | 50 | 40 | | | NQI | 0.58 | P 1 | 88 UTS | +18.85 | UTE | LTE | LTE | 133 | 510 |
| Bobbin | 50 | 62 | | | NQI | 0.40 | P 1 | 108 013 | +0.29 | UTE | LTE | LTE | 140 | 510 |
| Bobbin | 50 | 107 | | | NQI | 0.49 | 3 | 63 014 | +6.59 | UTE | LTE | LTE | 44 | 510 |
| Bobbin | 51 | 3 | | | NQI | 0.83 | P 1 | 79 009 | +0.63 | UTE | LTE | LTE | 159 | 510 |
| Bobbin | 51 | 6 | | | NQI | 0.41 | 3 | 89 002 | +2.62 | UTE | LTE | LTE | 159 | 510 |
| Bobbin | 51 | 47 | | | NQI | 0.40 | 3 | 91 013 | +11.27 | UTE | LTE | LTE | 129 | 510 |
| Bobbin | 51 | 69 | | | NQI | 0.61 | 3 | 60 002 | +12.87 | UTE | LTE | LTE | 26 | 510 |
| Bobbin | 51 | 74 | | | NQI | 0.31 | 3 | 103 010 | +9.99 | UTE | LTE | LTE | 25 | 510 |
| Bobbin | 52 | 26 | | | NQI | 0.97 | 3 | 58 012 | +28.50 | UTE | LTE | LTE | 152 | 510 |
| Bobbin | 52 | 29 | | | NQI | 0.64 | 3 | 72 015 | +12.66 | UTE | LTE | LTE | 151 | 510 |
| Bobbin | 52 | 35 | | | NQI | 0.45 | 3 | 73 LTS | +21.78 | UTE | LTE | LTE | 129 | 510 |
| Bobbin | 52 | 75 | ODI | 23 | 0.46 | 3 | 100 | 011 | +21.95 | UTE | LTE | LTE | 25 | 510 |
| Bobbin | 52 | 79 | ODI | 20 | 0.25 | 3 | 102 | 012 | +21.98 | UTE | LTE | LTE | 25 | 510 |
| Bobbin | 52 | 98 | | | NQI | 0.90 | P 1 | 135 014 | +0.75 | UTE | LTE | LTE | 39 | 510 |
| Bobbin | 52 | 106 | | | NQI | 0.35 | 3 | 110 004 | +30.63 | UTE | LTE | LTE | 39 | 510 |
| Bobbin | 52 | 108 | | | NQI | 0.80 | P 1 | 125 014 | +0.75 | UTE | LTE | LTE | 39 | 510 |
| Bobbin | 52 | 113 | | | NQI | 0.35 | 3 | 77 015 | +44.87 | UTE | LTE | LTE | 40 | 510 |
| Bobbin | 52 | 121 | | | NQI | 0.49 | P 1 | 107 010 | +0.50 | UTE | LTE | LTE | 40 | 510 |
| Bobbin | 53 | 1 | | | NQI | 1.04 | 3 | 112 011 | +4.07 | UTE | LTE | LTE | 152 | 510 |
| Bobbin | | | | | NQI | 1.03 | P 1 | 82 011 | +0.45 | UTE | LTE | LTE | 152 | 510 |
| Bobbin | 53 | 3 | | | NQI | 0.38 | P 1 | 125 013 | +0.74 | UTE | LTE | LTE | 152 | 510 |
| Bobbin | 53 | 4 | | | NQI | 0.74 | P 1 | 85 013 | +0.84 | UTE | LTE | LTE | 151 | 510 |
| Bobbin | 53 | 7 | | | NQI | 0.44 | 3 | 47 013 | +25.29 | UTE | LTE | LTE | 152 | 510 |
| Bobbin | 53 | 17 | | | NQI | 0.38 | 3 | 97 012 | +29.20 | UTE | LTE | LTE | 152 | 510 |
| Bobbin | 53 | 21 | | | NQI | 0.33 | 3 | 74 008 | +7.06 | UTE | LTE | LTE | 152 | 510 |
| Bobbin | | | | | NQI | 0.33 | 3 | 75 009 | +12.15 | UTE | LTE | LTE | 152 | 510 |
| Bobbin | | | | | NQI | 0.42 | 3 | 69 010 | +13.99 | UTE | LTE | LTE | 152 | 510 |
| Bobbin | 53 | 30 | | | NQI | 0.23 | 3 | 112 014 | +29.52 | UTE | LTE | LTE | 151 | 510 |
| Bobbin | 53 | 54 | | | NQI | 0.63 | 3 | 83 014 | +17.52 | UTE | LTE | LTE | 140 | 510 |
| Bobbin | 53 | 71 | | | NQI | 0.49 | P 1 | 83 014 | +0.39 | UTE | LTE | LTE | 22 | 510 |
| Bobbin | 53 | 77 | | | NQI | 0.52 | 3 | 76 003 | +25.88 | UTE | LTE | LTE | 51 | 510 |
| Bobbin | 53 | 86 | | | NQI | 0.63 | 3 | 104 008 | +8.11 | UTE | LTE | LTE | 22 | 510 |
| Bobbin | 53 | 101 | | | NQI | 0.31 | P 1 | 71 013 | +0.37 | UTE | LTE | LTE | 39 | 510 |
| Bobbin | 54 | 2 | | | NQI | 0.40 | P 1 | 72 014 | +1.05 | UTE | LTE | LTE | 152 | 510 |
| Bobbin | 54 | 3 | ODI | 60 | 2.05 | P 1 | 66 | 014 | +0.86 | UTE | LTE | LTE | 152 | 510 |
| Bobbin | 54 | 7 | | | NQI | 0.43 | P 1 | 90 013 | +0.74 | UTE | LTE | LTE | 152 | 510 |
| Bobbin | 54 | 41 | | | NQI | 0.36 | 3 | 102 009 | +6.11 | UTE | LTE | LTE | 133 | 510 |
| Bobbin | 54 | 93 | | | NQI | 0.39 | 3 | 76 003 | +31.40 | UTE | LTE | LTE | 51 | 510 |
| Bobbin | 54 | 124 | | | NQI | 0.67 | 3 | 60 009 | +14.45 | UTE | LTE | LTE | 40 | 510 |
| Bobbin | 54 | 126 | ODI | 11 | 0.48 | 3 | 108 | 012 | +13.91 | UTE | LTE | LTE | 40 | 510 |
| Bobbin | 55 | 45 | | | NQI | 0.46 | 3 | 74 008 | +11.24 | UTE | LTE | LTE | 129 | 510 |
| Bobbin | 55 | 48 | | | NQI | 0.27 | 3 | 88 006 | +5.05 | UTE | LTE | LTE | 133 | 510 |
| Bobbin | | | | | NQI | 0.35 | 3 | 59 007 | +10.19 | UTE | LTE | LTE | 133 | 510 |
| Bobbin | 55 | 77 | | | NQI | 0.26 | P 1 | 82 008 | -0.04 | UTE | LTE | LTE | 52 | 510 |
| Bobbin | 55 | 82 | | | NQI | 0.29 | 3 | 110 008 | +9.34 | UTE | LTE | LTE | 22 | 510 |
| Bobbin | 55 | 108 | | | NQI | 0.23 | 3 | 96 014 | +1.43 | UTE | LTE | LTE | 40 | 510 |
| Bobbin | 55 | 120 | | | NQI | 0.41 | P 1 | 68 008 | -0.95 | UTE | LTE | LTE | 40 | 510 |
| Bobbin | 55 | 124 | ODI | 41 | 10.06 | P 1 | 80 | 013 | +0.68 | UTE | LTE | LTE | 40 | 510 |
| Bobbin | 56 | 18 | | | NQI | 0.27 | 3 | 120 009 | +33.01 | UTE | LTE | LTE | 151 | 510 |
| Bobbin | 56 | 32 | | | NQI | 0.44 | 3 | 63 011 | +33.73 | UTE | LTE | LTE | 151 | 510 |
| Bobbin | 56 | 39 | | | NQI | 0.33 | 3 | 92 012 | +10.80 | UTE | LTE | LTE | 133 | 510 |
| Bobbin | 56 | 54 | | | NQI | 0.42 | 3 | 64 012 | +29.57 | UTE | LTE | LTE | 140 | 510 |
| Bobbin | 56 | 110 | ODI | 15 | 0.39 | P 1 | 93 | 011 | +1.36 | UTE | LTE | LTE | 39 | 510 |
| Bobbin | 56 | 126 | | | NQI | 0.31 | P 1 | 67 009 | -0.69 | UTE | LTE | LTE | 40 | 510 |
| Bobbin | 57 | 5 | | | NQI | 0.59 | 3 | 83 001 | +3.21 | UTE | LTE | LTE | 152 | 510 |

FTI TUBAN II (Version 2.3) 05/09/2000 08:36:15
 Oconee Nuclear Station - Unit Three
 S/G B
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 10 of 24

ATTACHMENT A-2 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|-----|-----|----------|------------------|---------|-----|-------|-------|----------|
| Bobbin | 57 | 10 | NQI | | 0.61 | 3 | 141 | 011 | +1.07 | UTE | LTE | LTE | 151 | 510 |
| Bobbin | 57 | 55 | NQI | | 0.43 | 3 | 85 | 010 | +27.81 | UTE | LTE | LTE | 140 | 510 |
| Bobbin | | | NQI | | 0.37 | P 1 | 87 | LTS | +3.63 | UTE | LTE | LTE | 140 | 510 |
| Bobbin | 57 | 77 | NQI | | 0.27 | 3 | 85 | 012 | +33.49 | UTE | LTE | LTE | 19 | 510 |
| Bobbin | 57 | 93 | NQI | | 0.34 | 3 | 80 | 008 | +16.41 | UTE | LTE | LTE | 19 | 510 |
| Bobbin | 57 | 103 | NQI | | 0.66 | 3 | 81 | 009 | +3.32 | UTE | LTE | LTE | 39 | 510 |
| Bobbin | 57 | 114 | NQI | | 0.57 | 3 | 79 | 011 | +7.54 | UTE | LTE | LTE | 40 | 510 |
| Bobbin | 57 | 122 | NQI | | 0.51 | P 1 | 75 | 010 | +0.39 | UTE | LTE | LTE | 40 | 510 |
| Bobbin | 57 | 128 | NQI | | 0.73 | 3 | 109 | 013 | +2.03 | UTE | LTE | LTE | 58 | 510 |
| Bobbin | 58 | 3 | NQI | | 0.61 | P 1 | 89 | 010 | +0.10 | UTE | LTE | LTE | 152 | 510 |
| Bobbin | 58 | 4 | NQI | | 0.51 | P 1 | 76 | 009 | +0.75 | UTE | LTE | LTE | 152 | 510 |
| Bobbin | 58 | 18 | NQI | | 1.34 | P 1 | 66 | 015 | +0.56 | UTE | LTE | LTE | 152 | 510 |
| Bobbin | 58 | 50 | NQI | | 0.54 | 3 | 123 | 015 | +31.45 | UTE | LTE | LTE | 133 | 510 |
| Bobbin | | | NQI | | 0.64 | 3 | 137 | 015 | +32.11 | UTE | LTE | LTE | 133 | 510 |
| Bobbin | 58 | 55 | NQI | | 0.22 | 3 | 107 | 011 | +33.22 | LTE | UTE | UTE | 8 | 510 |
| Bobbin | 58 | 57 | NQI | | 0.25 | 3 | 107 | 006 | +14.13 | LTE | UTE | UTE | 1 | 510 |
| Bobbin | 58 | 62 | NQI | | 0.49 | 3 | 89 | 015 | +33.49 | LTE | UTE | UTE | 1 | 510 |
| Bobbin | 58 | 87 | DWI | | 3.66 | 3 | 191 | LTS | +26.45 | UTE | LTE | LTE | 52 | 510 |
| Bobbin | 58 | 94 | NQI | | 0.61 | 3 | 104 | 002 | +23.95 | UTE | LTE | LTE | 19 | 510 |
| Bobbin | 58 | 99 | NQI | | 0.27 | 3 | 96 | 011 | +32.10 | UTE | LTE | LTE | 39 | 510 |
| Bobbin | 58 | 124 | NQI | | 0.54 | P 1 | 98 | 009 | -0.77 | UTE | LTE | LTE | 40 | 510 |
| Bobbin | 58 | 125 | NQI | | 0.79 | 3 | 103 | 009 | +22.35 | UTE | LTE | LTE | 39 | 510 |
| Bobbin | | | NQI | | 0.53 | P 1 | 80 | 009 | +0.59 | UTE | LTE | LTE | 39 | 510 |
| Bobbin | 58 | 129 | NQI | | 0.77 | 3 | 106 | 014 | +31.63 | UTE | LTE | LTE | 61 | 510 |
| Bobbin | 59 | 3 | NQI | | 0.76 | P 1 | 76 | 009 | +0.72 | UTE | LTE | LTE | 151 | 510 |
| Bobbin | | | ODI | 50 | 2.00 | P 1 | 78 | 014 | +0.69 | UTE | LTE | LTE | 151 | 510 |
| Bobbin | 59 | 6 | NQI | | 0.18 | 3 | 73 | 011 | +26.21 | UTE | LTE | LTE | 151 | 510 |
| Bobbin | | | NQI | | 0.22 | 3 | 85 | 011 | +25.10 | UTE | LTE | LTE | 151 | 510 |
| Bobbin | | | NQI | | 0.22 | 3 | 90 | 011 | +28.54 | UTE | LTE | LTE | 151 | 510 |
| Bobbin | | | NQI | | 0.27 | 3 | 84 | 011 | +21.27 | UTE | LTE | LTE | 151 | 510 |
| Bobbin | | | NQI | | 0.29 | 3 | 98 | 010 | +32.25 | UTE | LTE | LTE | 151 | 510 |
| Bobbin | | | NQI | | 0.38 | 3 | 87 | 011 | +34.03 | UTE | LTE | LTE | 151 | 510 |
| Bobbin | | | NQI | | 0.31 | 3 | 126 | 010 | +13.28 to +20.52 | UTE | LTE | LTE | 151 | 510 |
| Bobbin | 59 | 8 | NQI | | 1.23 | P 1 | 114 | 009 | -0.61 | UTE | LTE | LTE | 151 | 510 |
| Bobbin | 59 | 30 | NQI | | 0.75 | 3 | 80 | 005 | +19.92 | UTE | LTE | LTE | 152 | 510 |
| Bobbin | 59 | 39 | NQI | | 0.42 | 3 | 95 | 009 | +25.54 | UTE | LTE | LTE | 129 | 510 |
| Bobbin | | | NQI | | 0.59 | 3 | 82 | 015 | +14.80 | UTE | LTE | LTE | 129 | 510 |
| Bobbin | 59 | 89 | NQI | | 0.28 | 3 | 85 | 014 | +32.91 | UTE | LTE | LTE | 52 | 510 |
| Bobbin | 59 | 96 | NQI | | 0.95 | P 1 | 103 | 013 | +0.75 | UTE | LTE | LTE | 39 | 510 |
| Bobbin | 59 | 118 | NQI | | 0.51 | P 1 | 62 | 008 | -0.68 | UTE | LTE | LTE | 39 | 510 |
| Bobbin | | | NQI | | 0.74 | P 1 | 136 | 009 | -0.50 | UTE | LTE | LTE | 39 | 510 |
| Bobbin | 59 | 121 | NQI | | 0.56 | 3 | 86 | 009 | +21.60 to +30.28 | UTE | LTE | LTE | 40 | 510 |
| Bobbin | 59 | 122 | NQI | | 0.50 | P 1 | 84 | 008 | -0.61 | UTE | LTE | LTE | 39 | 510 |
| Bobbin | | | NQI | | 1.15 | P 1 | 132 | 009 | -0.67 | UTE | LTE | LTE | 39 | 510 |
| Bobbin | 59 | 123 | NQI | | 1.96 | P 1 | 107 | 015 | +0.80 | UTE | LTE | LTE | 40 | 510 |
| Bobbin | 60 | 22 | NQI | | 0.63 | 3 | 62 | 001 | +1.47 | UTE | LTE | LTE | 148 | 510 |
| Bobbin | 60 | 62 | NQI | | 0.47 | 3 | 100 | 001 | +34.18 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 60 | 78 | NQI | | 0.42 | P 1 | 52 | 005 | +0.25 | UTE | LTE | LTE | 55 | 510 |
| Bobbin | 60 | 124 | NQI | | 0.72 | P 1 | 100 | 009 | -0.80 | UTE | LTE | LTE | 40 | 510 |
| Bobbin | 60 | 125 | NQI | | 1.24 | 3 | 110 | 009 | +22.80 | UTE | LTE | LTE | 39 | 510 |
| Bobbin | 60 | 126 | NQI | | 0.52 | 3 | 77 | 009 | +24.58 to +37.37 | UTE | LTE | LTE | 40 | 510 |
| Bobbin | 60 | 128 | NQI | | 0.23 | P 1 | 60 | 001 | +0.97 | UTE | LTE | LTE | 40 | 510 |
| Bobbin | | | NQI | | 0.56 | P 1 | 72 | 014 | +0.79 | UTE | LTE | LTE | 40 | 510 |
| Bobbin | | | NQI | | 0.63 | P 1 | 64 | 015 | -0.45 | UTE | LTE | LTE | 40 | 510 |
| Bobbin | 61 | 2 | ODI | 30 | 0.91 | P 1 | 87 | 014 | +1.25 | UTE | LTE | LTE | 156 | 510 |
| Bobbin | 61 | 28 | NQI | | 0.77 | P 1 | 83 | UTS | +16.88 | UTE | LTE | LTE | 156 | 510 |
| Bobbin | 61 | 52 | NQI | | 0.29 | 3 | 86 | 007 | +16.33 | LTE | UTE | UTE | 7 | 510 |
| Bobbin | 61 | 54 | NQI | | 0.47 | 3 | 69 | 011 | +22.63 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 61 | 58 | NQI | | 0.64 | P 1 | 104 | 013 | +0.04 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 61 | 78 | NQI | | 0.25 | 3 | 113 | 006 | +29.44 | UTE | LTE | LTE | 15 | 510 |
| Bobbin | 61 | 80 | NQI | | 0.31 | 3 | 79 | 007 | +29.54 | UTE | LTE | LTE | 15 | 510 |
| Bobbin | 61 | 85 | NQI | | 0.42 | P 1 | 106 | 015 | +0.50 | UTE | LTE | LTE | 55 | 510 |
| Bobbin | 61 | 88 | NQI | | 0.37 | 3 | 101 | 012 | +34.38 | UTE | LTE | LTE | 55 | 510 |
| Bobbin | 61 | 108 | NQI | | 0.34 | 3 | 111 | 013 | +23.23 | UTE | LTE | LTE | 40 | 510 |
| Bobbin | 61 | 111 | NQI | | 0.45 | 3 | 97 | LTS | +35.06 | UTE | LTE | LTE | 39 | 510 |

FTI TUBAN II (Version 2.3) 05/09/2000 08:36:15
Oconee Nuclear Station - Unit Three
S/G B
04/00 RFO
Bobbin,Sleeve Bobbin

Page 11 of 24

ATTACHMENT A-2 - LIST OF IMPERFECTIONS - BOBBIN
OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|------|-----|----------|------------------|---------|-----|-------|---------|----------|
| Bobbin | | | | | NQI | 0.99 | P 1 | 122 014 | +0.75 | UTE | LTE | LTE | 39 510 | |
| Bobbin | 61 | 121 | | | NQI | 0.97 | P 1 | 123 009 | -0.75 | UTE | LTE | LTE | 39 510 | |
| Bobbin | 61 | 122 | | | NQI | 0.83 | P 1 | 88 009 | -0.61 | UTE | LTE | LTE | 40 510 | |
| Bobbin | | | | | NQI | 0.70 | 3 | 89 009 | +20.18 to +28.47 | UTE | LTE | LTE | 40 510 | |
| Bobbin | 61 | 124 | | | NQI | 0.31 | 3 | 107 010 | +2.96 | UTE | LTE | LTE | 40 510 | |
| Bobbin | | | | | NQI | 0.33 | P 1 | 103 014 | +0.90 | UTE | LTE | LTE | 40 510 | |
| Bobbin | | | | | NQI | 0.56 | P 1 | 88 009 | -0.61 | UTE | LTE | LTE | 40 510 | |
| Bobbin | 61 | 125 | | | NQI | 0.37 | 3 | 101 011 | +10.31 | UTE | LTE | LTE | 61 510 | |
| Bobbin | 61 | 126 | | | NQI | 0.65 | 3 | 125 012 | +3.63 | UTE | LTE | LTE | 61 510 | |
| Bobbin | | | | | NQI | 0.44 | 3 | 87 011 | +7.37 to +14.79 | UTE | LTE | LTE | 61 510 | |
| Bobbin | 62 | 75 | | | NQI | 0.31 | 3 | 98 006 | +26.40 | UTE | LTE | LTE | 15 510 | |
| Bobbin | 62 | 99 | | | NQI | 0.30 | 3 | 85 007 | +11.52 | UTE | LTE | LTE | 39 510 | |
| Bobbin | 62 | 108 | | | NQI | 0.25 | P 1 | 75 014 | +0.22 | UTE | LTE | LTE | 40 510 | |
| Bobbin | 62 | 115 | | | NQI | 2.58 | 3 | 102 014 | +1.34 | UTE | LTE | LTE | 39 510 | |
| Bobbin | 63 | 18 | | | NQI | 0.35 | 3 | 109 012 | +17.59 | UTE | LTE | LTE | 157 510 | |
| Bobbin | 63 | 38 | | | NQI | 0.38 | 3 | 80 010 | +12.73 | UTE | LTE | LTE | 137 510 | |
| Bobbin | 63 | 59 | | | NQI | 0.53 | P 1 | 98 013 | +0.86 | LTE | UTE | UTE | 3 510 | |
| Bobbin | 63 | 66 | | | NQI | 0.50 | P 1 | 109 014 | +0.81 | LTE | UTE | UTE | 4 510 | |
| Bobbin | 63 | 128 | | | NQI | 0.55 | P 1 | 90 009 | -0.72 | UTE | LTE | LTE | 37 510 | |
| Bobbin | | | 30 | | ODI | 0.72 | P 1 | 91 014 | +0.81 | UTE | LTE | LTE | 37 510 | |
| Bobbin | 64 | 12 | | | NQI | 0.75 | P 1 | 71 014 | +0.90 | UTE | LTE | LTE | 156 510 | |
| Bobbin | 64 | 38 | | | NQI | 0.39 | 3 | 99 015 | +23.22 | UTE | LTE | LTE | 136 510 | |
| Bobbin | 64 | 48 | | | NQI | 0.21 | 3 | 90 013 | +27.10 | UTE | LTE | LTE | 136 510 | |
| Bobbin | | | | | NQI | 0.28 | 3 | 94 014 | +3.60 | UTE | LTE | LTE | 136 510 | |
| Bobbin | 64 | 94 | | | NQI | 0.29 | 3 | 75 001 | +11.67 | UTE | LTE | LTE | 55 510 | |
| Bobbin | 64 | 98 | | | NQI | 0.27 | 3 | 101 007 | +19.19 | UTE | LTE | LTE | 37 510 | |
| Bobbin | 64 | 124 | | | NQI | 0.89 | P 1 | 94 009 | -0.53 | UTE | LTE | LTE | 61 510 | |
| Bobbin | 64 | 125 | | | NQI | 0.35 | P 1 | 111 009 | +0.44 | UTE | LTE | LTE | 61 510 | |
| Bobbin | | | | | NQI | 1.16 | 3 | 110 009 | +18.88 to +27.00 | UTE | LTE | LTE | 61 510 | |
| Bobbin | 65 | 64 | | | NQI | 0.31 | P 1 | 74 005 | +0.77 | LTE | UTE | UTE | 4 510 | |
| Bobbin | 65 | 73 | | | DWI | 0.91 | P 1 | 107 LTS | -0.08 | UTE | LTE | LTE | 55 510 | |
| Bobbin | 65 | 74 | | | NQI | 0.27 | 3 | 82 015 | +21.33 | UTE | LTE | LTE | 15 510 | |
| Bobbin | 65 | 76 | | | NQI | 0.40 | 3 | 85 008 | +19.66 | UTE | LTE | LTE | 15 510 | |
| Bobbin | 65 | 78 | | | NQI | 0.38 | 3 | 85 009 | +33.43 | UTE | LTE | LTE | 15 510 | |
| Bobbin | 65 | 95 | | | NQI | 0.46 | 3 | 97 003 | +29.35 | UTE | LTE | LTE | 55 510 | |
| Bobbin | 65 | 99 | | | NQI | 0.61 | 3 | 102 009 | +16.96 | UTE | LTE | LTE | 37 510 | |
| Bobbin | 65 | 126 | | | NQI | 1.15 | P 1 | 97 009 | -0.74 | UTE | LTE | LTE | 61 510 | |
| Bobbin | 65 | 127 | | | NQI | 0.50 | P 1 | 60 008 | -0.68 | UTE | LTE | LTE | 37 510 | |
| Bobbin | | | | | NQI | 1.03 | P 1 | 117 009 | -0.70 | UTE | LTE | LTE | 37 510 | |
| Bobbin | | | | | NQI | 1.30 | 3 | 123 009 | +22.39 to +29.64 | UTE | LTE | LTE | 37 510 | |
| Bobbin | 65 | 128 | | | NQI | 1.15 | P 1 | 108 009 | -0.27 | UTE | LTE | LTE | 61 510 | |
| Bobbin | 65 | 129 | | 28 | ODI | 0.62 | P 1 | 94 009 | +38.24 | UTE | LTE | LTE | 61 510 | |
| Bobbin | 66 | 9 | | | NQI | 0.29 | P 1 | 70 001 | -0.44 | UTE | LTE | LTE | 152 510 | |
| Bobbin | 66 | 29 | | | NQI | 0.27 | 3 | 91 013 | +31.65 | UTE | LTE | LTE | 152 510 | |
| Bobbin | | | | | NQI | 0.27 | 3 | 99 008 | +8.51 | UTE | LTE | LTE | 152 510 | |
| Bobbin | | | | | NQI | 0.29 | 3 | 92 008 | +6.70 | UTE | LTE | LTE | 152 510 | |
| Bobbin | | | | | NQI | 0.31 | 3 | 82 008 | +34.54 | UTE | LTE | LTE | 152 510 | |
| Bobbin | | | | | NQI | 0.34 | 3 | 83 010 | +14.74 | UTE | LTE | LTE | 152 510 | |
| Bobbin | | | | | NQI | 0.34 | 3 | 92 008 | +29.29 | UTE | LTE | LTE | 152 510 | |
| Bobbin | | | | | NQI | 0.35 | 3 | 98 008 | +10.64 | UTE | LTE | LTE | 152 510 | |
| Bobbin | | | | | NQI | 0.38 | 3 | 90 007 | +29.77 | UTE | LTE | LTE | 152 510 | |
| Bobbin | | | | | NQI | 0.42 | 3 | 76 014 | +4.29 | UTE | LTE | LTE | 152 510 | |
| Bobbin | 66 | 32 | | | NQI | 0.28 | P 1 | 89 013 | -0.19 | UTE | LTE | LTE | 151 510 | |
| Bobbin | 66 | 57 | | | NQI | 0.53 | 3 | 67 008 | +6.94 | LTE | UTE | UTE | 4 510 | |
| Bobbin | 66 | 91 | | | NQI | 0.66 | 3 | 101 005 | +5.07 | UTE | LTE | LTE | 14 510 | |
| Bobbin | 66 | 99 | | | NQI | 0.20 | P 1 | 95 014 | -0.27 | UTE | LTE | LTE | 38 510 | |
| Bobbin | 66 | 127 | | | NQI | 1.17 | 3 | 80 009 | +22.64 | UTE | LTE | LTE | 61 510 | |
| Bobbin | 66 | 128 | | | NQI | 0.43 | P 1 | 106 009 | -0.61 | UTE | LTE | LTE | 37 510 | |
| Bobbin | | | | | NQI | 0.52 | P 1 | 102 008 | -0.66 | UTE | LTE | LTE | 37 510 | |
| Bobbin | 66 | 129 | | | NQI | 0.58 | P 1 | 86 009 | -0.62 | UTE | LTE | LTE | 61 510 | |
| Bobbin | 66 | 131 | | | NQI | 1.14 | 3 | 106 015 | +5.21 | UTE | LTE | LTE | 61 510 | |
| Bobbin | 67 | 19 | | | NQI | 0.26 | P 1 | 62 014 | +1.01 | UTE | LTE | LTE | 152 510 | |
| Bobbin | 67 | 29 | | | NQI | 0.38 | 3 | 73 009 | +19.64 | UTE | LTE | LTE | 152 510 | |
| Bobbin | | | | | NQI | 0.44 | 3 | 105 007 | +17.28 | UTE | LTE | LTE | 152 510 | |
| Bobbin | 67 | 35 | | | NQI | 0.28 | 3 | 80 003 | +36.52 | UTE | LTE | LTE | 137 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:36:15
 Oconee Nuclear Station - Unit Three
 S/G B
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 12 of 24

ATTACHMENT A-2 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|------|-----|----------|---------|---------|-----|-------|-------|----------|
| Bobbin | | | | | NQI | 0.36 | 3 | 77 004 | +18.23 | UTE | LTE | LTE | 137 | 510 |
| Bobbin | 67 | 66 | | | NQI | 0.29 | 3 | 96 012 | +8.65 | LTE | UTE | UTE | 4 | 510 |
| Bobbin | 67 | 84 | | | NQI | 0.22 | 3 | 103 014 | +2.50 | UTE | LTE | LTE | 11 | 510 |
| Bobbin | | | | | NQI | 0.22 | 3 | 109 012 | +31.00 | UTE | LTE | LTE | 11 | 510 |
| Bobbin | 67 | 113 | | | NQI | 0.56 | P 1 | 132 015 | -0.28 | UTE | LTE | LTE | 37 | 510 |
| Bobbin | 67 | 129 | | | NQI | 0.50 | 3 | 114 009 | +38.84 | UTE | LTE | LTE | 38 | 510 |
| Bobbin | | | | | NQI | 0.52 | 3 | 98 009 | +37.40 | UTE | LTE | LTE | 38 | 510 |
| Bobbin | | | | | NQI | 0.85 | P 1 | 75 015 | -0.46 | UTE | LTE | LTE | 38 | 510 |
| Bobbin | 68 | 5 | | | NQI | 0.51 | P 1 | 93 011 | +0.00 | 014 | LTE | LTE | 143 | 510 |
| Bobbin | 68 | 38 | | | NQI | 0.23 | 3 | 87 010 | +4.16 | UTE | LTE | LTE | 136 | 510 |
| Bobbin | 68 | 40 | | | NQI | 0.53 | P 1 | 96 014 | -0.19 | UTE | LTE | LTE | 136 | 510 |
| Bobbin | 68 | 82 | 37 | | ODI | 0.43 | 3 | 92 013 | +16.99 | UTE | LTE | LTE | 10 | 510 |
| Bobbin | 68 | 113 | | | NQI | 0.31 | 3 | 78 LTS | +13.20 | UTE | LTE | LTE | 38 | 510 |
| Bobbin | | | | | NQI | 0.52 | 3 | 86 001 | +2.47 | UTE | LTE | LTE | 38 | 510 |
| Bobbin | 68 | 123 | | | NQI | 0.32 | P 1 | 54 009 | -0.79 | UTE | LTE | LTE | 38 | 510 |
| Bobbin | 69 | 9 | | | NQI | 0.42 | 3 | 102 001 | +33.76 | 014 | LTE | LTE | 143 | 510 |
| Bobbin | 69 | 14 | | | NQI | 0.34 | P 1 | 111 010 | +0.41 | UTE | LTE | LTE | 148 | 510 |
| Bobbin | 69 | 18 | | | NQI | 0.29 | 3 | 80 001 | +35.48 | UTE | LTE | LTE | 148 | 510 |
| Bobbin | 69 | 24 | | | NQI | 0.57 | 3 | 72 012 | +24.18 | UTE | LTE | LTE | 148 | 510 |
| Bobbin | 69 | 25 | | | NQI | 0.32 | 3 | 86 011 | +22.14 | UTE | LTE | LTE | 147 | 510 |
| Bobbin | | | | | NQI | 0.54 | 3 | 89 004 | +6.68 | UTE | LTE | LTE | 147 | 510 |
| Bobbin | 69 | 31 | | | NQI | 0.46 | P 1 | 100 009 | +0.39 | UTE | LTE | LTE | 147 | 510 |
| Bobbin | 69 | 44 | | | NQI | 0.28 | 3 | 79 LTS | +3.08 | UTE | LTE | LTE | 137 | 510 |
| Bobbin | 69 | 75 | | | NQI | 0.34 | 3 | 104 006 | +27.89 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 69 | 79 | | | NQI | 0.32 | 3 | 105 006 | +37.43 | UTE | LTE | LTE | 11 | 510 |
| Bobbin | | | | | NQI | 0.35 | 3 | 104 003 | +25.51 | UTE | LTE | LTE | 11 | 510 |
| Bobbin | 69 | 81 | | | NQI | 0.87 | P 1 | 88 UTS | +12.51 | UTE | LTE | LTE | 11 | 510 |
| Bobbin | 69 | 83 | | | NQI | 0.21 | 3 | 82 008 | +28.83 | UTE | LTE | LTE | 11 | 510 |
| Bobbin | 69 | 84 | | | NQI | 0.25 | 3 | 93 015 | -1.50 | UTE | LTE | LTE | 10 | 510 |
| Bobbin | 69 | 89 | | | NQI | 0.33 | 3 | 84 LTS | +40.09 | UTE | LTE | LTE | 11 | 510 |
| Bobbin | 70 | 14 | | | NQI | 0.52 | 3 | 64 004 | +15.35 | UTE | LTE | LTE | 148 | 510 |
| Bobbin | 70 | 17 | | | NQI | 0.21 | P 1 | 71 010 | +0.00 | UTE | LTE | LTE | 147 | 510 |
| Bobbin | 70 | 18 | | | NQI | 0.25 | P 1 | 56 010 | -0.16 | UTE | LTE | LTE | 148 | 510 |
| Bobbin | 70 | 94 | | | NQI | 0.31 | 3 | 98 003 | +26.12 | UTE | LTE | LTE | 11 | 510 |
| Bobbin | 70 | 98 | | | NQI | 0.36 | P 1 | 109 UTS | +18.84 | UTE | LTE | LTE | 33 | 510 |
| Bobbin | 70 | 111 | | | NQI | 1.34 | P 1 | 80 006 | -0.59 | UTE | LTE | LTE | 34 | 510 |
| Bobbin | 70 | 131 | | | NQI | 0.81 | 3 | 112 010 | +5.89 | UTE | LTE | LTE | 61 | 510 |
| Bobbin | 71 | 5 | | | NQI | 0.75 | P 1 | 85 012 | -0.70 | 014 | LTE | LTE | 144 | 510 |
| Bobbin | | | | | NQI | 0.88 | P 1 | 108 009 | -0.70 | 014 | LTE | LTE | 144 | 510 |
| Bobbin | 71 | 6 | | | NQI | 0.63 | 3 | 80 006 | +7.73 | 014 | LTE | LTE | 143 | 510 |
| Bobbin | | | | | NQI | 0.49 | P 1 | 89 011 | +0.35 | 014 | LTE | LTE | 143 | 510 |
| Bobbin | | | | | NQI | 0.77 | P 1 | 133 010 | +0.51 | 014 | LTE | LTE | 143 | 510 |
| Bobbin | 71 | 25 | | | NQI | 0.37 | 3 | 65 002 | +24.78 | UTE | LTE | LTE | 148 | 510 |
| Bobbin | 71 | 38 | | | NQI | 0.26 | 3 | 104 013 | +23.95 | UTE | LTE | LTE | 137 | 510 |
| Bobbin | 71 | 57 | | | NQI | 0.37 | 3 | 112 007 | +38.69 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 71 | 66 | | | NQI | 0.54 | 3 | 105 010 | +10.98 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 71 | 68 | | | NQI | 0.47 | 3 | 106 001 | +33.84 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 71 | 125 | | | NQI | 0.23 | P 1 | 103 010 | +0.18 | UTE | LTE | LTE | 33 | 510 |
| Bobbin | 71 | 127 | | | NQI | 0.28 | P 1 | 118 010 | +0.15 | UTE | LTE | LTE | 33 | 510 |
| Bobbin | 71 | 131 | | | NQI | 0.72 | P 1 | 82 015 | -0.40 | UTE | LTE | LTE | 61 | 510 |
| Bobbin | 72 | 5 | | | NQI | 0.61 | 3 | 112 010 | +8.21 | 014 | LTE | LTE | 143 | 510 |
| Bobbin | 72 | 6 | | | NQI | 0.42 | P 1 | 54 011 | -0.02 | 014 | LTE | LTE | 144 | 510 |
| Bobbin | 72 | 13 | | | NQI | 0.20 | P 1 | 79 012 | +0.35 | UTE | LTE | LTE | 148 | 510 |
| Bobbin | | | | | NQI | 0.42 | P 1 | 125 012 | +0.54 | UTE | LTE | LTE | 148 | 510 |
| Bobbin | 72 | 15 | | | NQI | 0.45 | P 1 | 77 012 | +0.62 | UTE | LTE | LTE | 148 | 510 |
| Bobbin | | | | | NQI | 0.52 | P 1 | 77 012 | -0.56 | UTE | LTE | LTE | 148 | 510 |
| Bobbin | 72 | 19 | | | NQI | 1.54 | P 1 | 94 011 | +0.54 | UTE | LTE | LTE | 148 | 510 |
| Bobbin | 72 | 24 | | | NQI | 1.05 | P 1 | 90 UTS | -0.08 | UTE | LTE | LTE | 147 | 510 |
| Bobbin | 72 | 25 | | | NQI | 0.56 | 3 | 89 UTS | -0.91 | UTE | LTE | LTE | 148 | 510 |
| Bobbin | 72 | 31 | | | NQI | 0.53 | P 1 | 97 010 | +0.41 | UTE | LTE | LTE | 148 | 510 |
| Bobbin | 72 | 41 | | | NQI | 1.14 | P 1 | 99 010 | +0.49 | UTE | LTE | LTE | 137 | 510 |
| Bobbin | 72 | 58 | | | NQI | 0.31 | P 1 | 88 014 | -0.19 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 72 | 68 | | | NQI | 0.34 | 3 | 105 010 | +12.75 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | | | | | NQI | 0.51 | 3 | 99 010 | +13.82 | LTE | UTE | UTE | 3 | 510 |
| Bobbin | 72 | 72 | | | NQI | 0.29 | 3 | 98 008 | +22.47 | LTE | UTE | UTE | 3 | 510 |

FTI TUBAN II (Version 2.3) 05/09/2000 08:36:15
 Oconee Nuclear Station - Unit Three
 S/G B
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 13 of 24

ATTACHMENT A-2 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|------|-------|-----|-----|----------|---------|---------|-----|-------|-------|----------|
| Bobbin | 72 | 83 | NQI | 0.34 | 3 | 82 | 014 | +31.87 | UTE | LTE | LTE | 10 | 510 | |
| Bobbin | 72 | 84 | NQI | 0.28 | 3 | 108 | 005 | +21.43 | UTE | LTE | LTE | 11 | 510 | |
| Bobbin | 72 | 99 | NQI | 0.21 | P 1 | 60 | 014 | +1.06 | UTE | LTE | LTE | 33 | 510 | |
| Bobbin | 72 | 103 | NQI | 0.72 | 3 | 76 | 004 | +34.33 | UTE | LTE | LTE | 33 | 510 | |
| Bobbin | 72 | 129 | NQI | 0.32 | 3 | 90 | 004 | +7.12 | UTE | LTE | LTE | 61 | 510 | |
| Bobbin | 73 | 3 | NQI | 1.04 | 3 | 104 | 011 | +31.99 | 014 | LTE | LTE | 143 | 510 | |
| Bobbin | | | NQI | 0.36 | P 1 | 92 | LTE | +9.27 | 014 | LTE | LTE | 143 | 510 | |
| Bobbin | 73 | 6 | NQI | 0.47 | P 1 | 92 | 011 | -0.97 | 014 | LTE | LTE | 143 | 510 | |
| Bobbin | | | NQI | 0.65 | P 1 | 111 | 012 | +0.48 | 014 | LTE | LTE | 143 | 510 | |
| Bobbin | 73 | 9 | NQI | 0.66 | P 1 | 113 | 013 | +0.43 | 014 | LTE | LTE | 144 | 510 | |
| Bobbin | 73 | 10 | NQI | 0.29 | 3 | 88 | 011 | +5.99 | 014 | LTE | LTE | 143 | 510 | |
| Bobbin | | | NQI | 0.86 | 3 | 92 | 011 | +5.60 | 014 | LTE | LTE | 143 | 510 | |
| Bobbin | | | NQI | 1.13 | 3 | 120 | 011 | +7.48 | 014 | LTE | LTE | 143 | 510 | |
| Bobbin | 73 | 13 | NQI | 0.40 | P 1 | 90 | LTE | +11.14 | UTE | LTE | LTE | 148 | 510 | |
| Bobbin | 73 | 15 | NQI | 0.50 | 3 | 71 | 005 | +2.71 | UTE | LTE | LTE | 148 | 510 | |
| Bobbin | 73 | 21 | NQI | 0.51 | 3 | 57 | 003 | +26.09 | UTE | LTE | LTE | 148 | 510 | |
| Bobbin | 73 | 35 | NQI | 0.28 | 3 | 86 | 009 | +29.84 | UTE | LTE | LTE | 147 | 510 | |
| Bobbin | 73 | 44 | NQI | 0.44 | P 1 | 137 | 008 | -0.70 | UTE | LTE | LTE | 137 | 510 | |
| Bobbin | 73 | 49 | NQI | 0.37 | 3 | 89 | 005 | +24.58 | UTE | LTE | LTE | 136 | 510 | |
| Bobbin | 73 | 56 | NQI | 0.41 | 3 | 87 | 004 | +6.61 | LTE | UTE | UTE | 4 | 510 | |
| Bobbin | 73 | 103 | NQI | 0.40 | 3 | 105 | 009 | +27.38 | UTE | LTE | LTE | 34 | 510 | |
| Bobbin | 73 | 110 | NQI | 0.28 | 3 | 98 | 014 | +22.79 | UTE | LTE | LTE | 33 | 510 | |
| Bobbin | 73 | 125 | NQI | 0.30 | P 1 | 113 | 010 | +0.47 | UTE | LTE | LTE | 34 | 510 | |
| Bobbin | 74 | 27 | NQI | 0.34 | 3 | 96 | 007 | +22.86 | 014 | LTE | LTE | 143 | 510 | |
| Bobbin | 74 | 31 | NQI | 0.31 | 3 | 139 | 008 | +10.50 | 014 | LTE | LTE | 143 | 510 | |
| Bobbin | 74 | 47 | NQI | 0.34 | 3 | 105 | 015 | +13.46 | UTE | LTE | LTE | 136 | 510 | |
| Bobbin | 74 | 58 | NQI | 0.35 | 3 | 100 | 010 | +18.06 | LTE | UTE | UTE | 4 | 510 | |
| Bobbin | 74 | 63 | NQI | 0.54 | P 1 | 108 | 006 | +0.66 | LTE | UTE | UTE | 4 | 510 | |
| Bobbin | 74 | 72 | NQI | 0.32 | 3 | 79 | 009 | +20.34 | UTE | LTE | LTE | 11 | 510 | |
| Bobbin | 74 | 75 | NQI | 0.24 | 3 | 73 | 010 | +10.00 | UTE | LTE | LTE | 10 | 510 | |
| Bobbin | 74 | 121 | NQI | 0.22 | 3 | 110 | 011 | +20.39 | UTE | LTE | LTE | 34 | 510 | |
| Bobbin | | | NQI | 0.35 | 3 | 61 | 011 | +32.81 | UTE | LTE | LTE | 34 | 510 | |
| Bobbin | 74 | 124 | NQI | 0.56 | 3 | 113 | 014 | +1.19 | UTE | LTE | LTE | 61 | 510 | |
| Bobbin | 75 | 7 | NQI | 0.78 | 3 | 48 | 007 | +22.28 | 014 | LTE | LTE | 144 | 510 | |
| Bobbin | 75 | 13 | NQI | 0.34 | 3 | 119 | LTS | +33.22 | 014 | LTE | LTE | 143 | 510 | |
| Bobbin | 75 | 19 | NQI | 0.63 | 3 | 98 | 013 | +34.49 | 014 | LTE | LTE | 143 | 510 | |
| Bobbin | 75 | 21 | NQI | 0.31 | 3 | 113 | 008 | +12.78 | 014 | LTE | LTE | 143 | 510 | |
| Bobbin | 75 | 22 | NQI | 0.34 | 3 | 55 | 006 | +17.16 | 014 | LTE | LTE | 144 | 510 | |
| Bobbin | | | NQI | 0.49 | 3 | 61 | 006 | +15.46 | 014 | LTE | LTE | 144 | 510 | |
| Bobbin | 75 | 34 | NQI | 0.35 | 3 | 51 | 003 | +15.50 | 014 | LTE | LTE | 144 | 510 | |
| Bobbin | | | NQI | 0.62 | 3 | 55 | 006 | +1.41 | 014 | LTE | LTE | 144 | 510 | |
| Bobbin | 75 | 71 | NQI | 0.18 | P 1 | 86 | 009 | +0.15 | LTE | UTE | UTE | 4 | 510 | |
| Bobbin | 75 | 86 | NQI | 0.24 | 3 | 112 | 012 | +27.04 | UTE | LTE | LTE | 10 | 510 | |
| Bobbin | 75 | 99 | NQI | 0.59 | 3 | 103 | 011 | +33.85 | UTE | LTE | LTE | 34 | 510 | |
| Bobbin | 75 | 112 | NQI | 0.77 | P 1 | 97 | 014 | +0.99 | UTE | LTE | LTE | 33 | 510 | |
| Bobbin | 75 | 116 | NQI | 0.42 | P 1 | 111 | 008 | +1.00 | UTE | LTE | LTE | 33 | 510 | |
| Bobbin | 75 | 118 | NQI | 1.03 | P 1 | 24 | 008 | +0.74 | UTE | LTE | LTE | 33 | 510 | |
| Bobbin | 75 | 121 | NQI | 0.77 | P 1 | 104 | 003 | -0.77 | UTE | LTE | LTE | 34 | 510 | |
| Bobbin | 75 | 123 | NQI | 0.43 | 3 | 124 | 014 | +1.21 | UTE | LTE | LTE | 34 | 510 | |
| Bobbin | 76 | 66 | NQI | 0.31 | 3 | 106 | 009 | +35.09 | LTE | UTE | UTE | 4 | 510 | |
| Bobbin | | | NQI | 0.37 | 3 | 98 | 010 | +9.69 | LTE | UTE | UTE | 4 | 510 | |
| Bobbin | 76 | 76 | NQI | 0.25 | 3 | 118 | 006 | +13.10 | UTE | LTE | LTE | 10 | 510 | |
| Bobbin | | | NQI | 0.26 | 3 | 95 | 006 | +15.09 | UTE | LTE | LTE | 10 | 510 | |
| Bobbin | | | NQI | 0.30 | 3 | 98 | 009 | +3.17 | UTE | LTE | LTE | 10 | 510 | |
| Bobbin | | | NQI | 0.28 | P 1 | 63 | 009 | +0.38 | UTE | LTE | LTE | 10 | 510 | |
| Bobbin | 76 | 98 | NQI | 0.29 | 3 | 71 | 010 | +27.51 | UTE | LTE | LTE | 33 | 510 | |
| Bobbin | | | NQI | 0.37 | 3 | 115 | 010 | +27.28 | UTE | LTE | LTE | 33 | 510 | |
| Bobbin | | | NQI | 0.64 | 3 | 105 | 010 | +27.82 | UTE | LTE | LTE | 33 | 510 | |
| Bobbin | 76 | 118 | NQI | 0.38 | 3 | 75 | 012 | +2.25 | UTE | LTE | LTE | 33 | 510 | |
| Bobbin | | | NQI | 0.42 | 3 | 104 | 011 | +22.04 | UTE | LTE | LTE | 33 | 510 | |
| Bobbin | | | NQI | 0.79 | 3 | 118 | 011 | +19.21 | UTE | LTE | LTE | 33 | 510 | |
| Bobbin | | | NQI | 0.85 | 3 | 108 | 011 | +24.68 | UTE | LTE | LTE | 33 | 510 | |
| Bobbin | | | NQI | 0.95 | 3 | 113 | 011 | +19.71 | UTE | LTE | LTE | 33 | 510 | |
| Bobbin | | | NQI | 1.04 | 3 | 114 | 015 | +21.95 | UTE | LTE | LTE | 33 | 510 | |
| Bobbin | | | NQI | 1.36 | 3 | 125 | 012 | +28.46 | UTE | LTE | LTE | 33 | 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:36:15
 Oconee Nuclear Station - Unit Three
 S/G B
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 14 of 24

ATTACHMENT A-2 - LIST OF IMPERFECTIONS - BOBBIN

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|------|-----|----------|----------------|---------|-----|-------|-------|----------|
| Bobbin | | | | | NQI | 1.62 | 3 | 108 011 | +25.17 | UTE | LTE | LTE | 33 | 510 |
| Bobbin | | | | | NQI | 0.45 | P 1 | 92 013 | -0.04 | UTE | LTE | LTE | 33 | 510 |
| Bobbin | | | | | NQI | 0.65 | P 1 | 104 014 | +1.45 | UTE | LTE | LTE | 33 | 510 |
| Bobbin | 77 | 25 | | | NQI | 0.78 | 3 | 105 011 | +7.53 | 014 | LTE | LTE | 144 | 510 |
| Bobbin | 77 | 44 | | | NQI | 0.91 | P 1 | 72 003 | -0.72 | UTE | LTE | LTE | 115 | 510 |
| Bobbin | 77 | 50 | | | NQI | 0.22 | P 1 | 56 007 | -0.82 | UTE | LTE | LTE | 115 | 510 |
| Bobbin | 77 | 61 | | | NQI | 0.58 | 3 | 77 012 | +16.90 | LTE | UTE | UTE | 7 | 510 |
| Bobbin | 77 | 66 | | | NQI | 0.23 | 3 | 83 015 | +33.15 | LTE | UTE | UTE | 7 | 510 |
| Bobbin | | | | | NQI | 0.27 | 3 | 89 014 | +19.82 | LTE | UTE | UTE | 7 | 510 |
| Bobbin | | | | | NQI | 0.39 | 3 | 101 015 | +9.40 | LTE | UTE | UTE | 7 | 510 |
| Bobbin | 77 | 68 | | | NQI | 0.34 | 3 | 92 004 | +3.45 | LTE | UTE | UTE | 7 | 510 |
| Bobbin | 77 | 71 | | | NQI | 0.47 | 3 | 89 015 | +15.30 | LTE | UTE | UTE | 7 | 510 |
| Bobbin | 77 | 108 | | | NQI | 0.51 | 3 | 95 009 | +25.06 | UTE | LTE | LTE | 90 | 510 |
| Bobbin | 78 | 14 | | | NQI | 0.32 | 3 | 80 009 | +11.49 | 014 | LTE | LTE | 143 | 510 |
| Bobbin | 78 | 20 | | | NQI | 0.70 | 3 | 103 012 | -1.59 | 014 | LTE | LTE | 143 | 510 |
| Bobbin | 78 | 22 | | | NQI | 0.61 | 3 | 114 011 | +35.04 | 014 | LTE | LTE | 143 | 510 |
| Bobbin | | | | | NQI | 0.41 | P 1 | 72 012 | -1.11 | 014 | LTE | LTE | 143 | 510 |
| Bobbin | 78 | 34 | | | NQI | 1.29 | P 1 | 95 004 | -0.75 | 014 | LTE | LTE | 144 | 510 |
| Bobbin | 78 | 41 | | | NQI | 0.65 | P 1 | 55 004 | -0.83 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 78 | 42 | | | NQI | 0.91 | P 1 | 112 004 | -0.73 | UTE | LTE | LTE | 115 | 510 |
| Bobbin | 78 | 44 | | | NQI | 0.79 | 3 | 91 004 | +6.22 | UTE | LTE | LTE | 115 | 510 |
| Bobbin | 78 | 70 | | | ADI | 1.36 | 6 | 81 006 | +34.34 | LTE | UTE | UTE | 7 | 510 |
| Bobbin | 78 | 100 | | | NQI | 0.39 | 3 | 90 008 | +35.48 | UTE | LTE | LTE | 89 | 510 |
| Bobbin | | | | | NQI | 0.71 | P 1 | 79 009 | +0.16 | UTE | LTE | LTE | 89 | 510 |
| Bobbin | 78 | 111 | 17 | | ODI | 0.52 | P 1 | 100 014 | +1.02 | UTE | LTE | LTE | 90 | 510 |
| Bobbin | 79 | 14 | | | NQI | 0.52 | P 1 | 73 007 | +0.64 | UTE | LTE | LTE | 138 | 510 |
| Bobbin | 79 | 27 | | | NQI | 0.55 | P 1 | 105 015 | +0.55 | UTE | LTE | LTE | 139 | 510 |
| Bobbin | 79 | 30 | | | NQI | 0.54 | P 1 | 112 015 | +0.63 | UTE | LTE | LTE | 139 | 510 |
| Bobbin | 79 | 35 | | | NQI | 0.17 | 3 | 73 013 | +15.70 | UTE | LTE | LTE | 138 | 510 |
| Bobbin | | | | | NQI | 0.26 | 3 | 105 013 | +14.46 | UTE | LTE | LTE | 138 | 510 |
| Bobbin | | | | | NQI | 0.27 | 3 | 90 011 | +26.36 | UTE | LTE | LTE | 138 | 510 |
| Bobbin | | | | | NQI | 0.48 | 3 | 66 LTS | +22.32 | UTE | LTE | LTE | 138 | 510 |
| Bobbin | 79 | 46 | | | NQI | 0.42 | 3 | 115 010 | +20.52 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 79 | 50 | | | ADI | 1.12 | 6 | 66 005 | +8.09 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 79 | 67 | | | NQI | 0.49 | 3 | 92 010 | +19.55 | LTE | UTE | UTE | 7 | 510 |
| Bobbin | 79 | 73 | | | NQI | 0.69 | 3 | 101 006 | +35.08 | LTE | UTE | UTE | 7 | 510 |
| Bobbin | 80 | 7 | | | NQI | 0.44 | 3 | 147 010 | +33.27 | 014 | LTE | LTE | 143 | 510 |
| Bobbin | 80 | 8 | | | NQI | 0.49 | 3 | 64 013 | +20.24 | 014 | LTE | LTE | 144 | 510 |
| Bobbin | 80 | 10 | | | NQI | 0.30 | 3 | 96 011 | +6.05 | 014 | LTE | LTE | 144 | 510 |
| Bobbin | 80 | 30 | | | NQI | 0.47 | 3 | 90 010 | +3.71 | UTE | LTE | LTE | 139 | 510 |
| Bobbin | 80 | 48 | | | ADI | 1.80 | 6 | 85 014 | +11.22 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 80 | 68 | | | NQI | 0.77 | 3 | 99 010 | +14.58 | LTE | UTE | UTE | 5 | 510 |
| Bobbin | 80 | 71 | | | ADI | 5.24 | 6 | 81 005 | +30.82 | LTE | UTE | UTE | 5 | 510 |
| Bobbin | 80 | 108 | | | NQI | 0.38 | 3 | 95 010 | +6.90 | UTE | LTE | LTE | 86 | 510 |
| Bobbin | 80 | 112 | | | NQI | 0.25 | P 1 | 87 006 | +0.27 | UTE | LTE | LTE | 86 | 510 |
| Bobbin | 80 | 123 | 23 | | ODI | 0.76 | P 1 | 86 014 | +1.78 | UTE | LTE | LTE | 85 | 510 |
| Bobbin | 80 | 125 | | | NQI | 0.23 | P 1 | 101 014 | +0.99 | UTE | LTE | LTE | 86 | 510 |
| Bobbin | 80 | 130 | | | NQI | 0.57 | P 1 | 117 008 | -0.58 | UTE | LTE | LTE | 85 | 510 |
| Bobbin | 81 | 1 | | | NQI | 0.41 | 3 | 102 012 | +17.27 | 014 | LTE | LTE | 144 | 510 |
| Bobbin | 81 | 2 | | | NQI | 0.59 | P 1 | 113 012 | +0.49 | 014 | LTE | LTE | 143 | 510 |
| Bobbin | 81 | 9 | | | NQI | 0.35 | 3 | 86 012 | +14.63 | 014 | LTE | LTE | 144 | 510 |
| Bobbin | | | | | NQI | 0.36 | 3 | 80 012 | +15.94 | 014 | LTE | LTE | 144 | 510 |
| Bobbin | | | | | NQI | 0.50 | 3 | 83 012 | +31.22 | 014 | LTE | LTE | 144 | 510 |
| Bobbin | | | | | NQI | 0.50 | 3 | 87 010 | +25.37 | 014 | LTE | LTE | 144 | 510 |
| Bobbin | 81 | 29 | | | NQI | 0.60 | P 1 | 104 010 | -0.77 | UTE | LTE | LTE | 138 | 510 |
| Bobbin | 81 | 33 | | | NQI | 0.72 | P 1 | 164 010 | -0.68 | UTE | LTE | LTE | 138 | 510 |
| Bobbin | 81 | 36 | | | NQI | 0.69 | P 1 | 116 010 | -0.57 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 81 | 37 | | | NQI | 0.28 | 3 | 90 010 | +19.58 | UTE | LTE | LTE | 115 | 510 |
| Bobbin | | | | | NQI | 0.33 | P 1 | 97 010 | -0.78 | UTE | LTE | LTE | 115 | 510 |
| Bobbin | 81 | 44 | | | NQI | 0.56 | P 1 | 51 010 | -0.83 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 81 | 105 | | | NQI | 0.47 | 3 | 100 015 | +42.09 | UTE | LTE | LTE | 86 | 510 |
| Bobbin | 81 | 109 | | | NQI | 0.31 | P 1 | 84 015 | +0.12 | UTE | LTE | LTE | 86 | 510 |
| Bobbin | 81 | 129 | | | NQI | 0.42 | P 1 | 99 010 | +0.97 | UTE | LTE | LTE | 85 | 510 |
| Bobbin | 82 | 5 | | | NQI | 2.18 | 3 | 121 010 | +5.67 to +8.10 | 014 | LTE | LTE | 144 | 510 |
| Bobbin | 82 | 10 | | | NQI | 0.48 | 3 | 100 007 | +7.60 | UTE | LTE | LTE | 161 | 510 |

FTI TUBAN II (Version 2.3) 05/09/2000 08:36:15
 Oconee Nuclear Station - Unit Three
 S/G B
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 15 of 24

ATTACHMENT A-2 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|------|-----|----------|-----------------|---------|-----|-------|---------|----------|
| Bobbin | | | | | NQI | 0.33 | 3 | 88 010 | +9.73 to +17.66 | UTE | LTE | LTE | 161 510 | |
| Bobbin | 82 | 13 | | | NQI | 0.49 | 3 | 113 002 | +20.68 | UTE | LTE | LTE | 138 510 | |
| Bobbin | 82 | 17 | | | NQI | 0.56 | 3 | 98 010 | +17.64 | UTE | LTE | LTE | 138 510 | |
| Bobbin | 82 | 28 | | | NQI | 0.19 | P 1 | 90 011 | -0.31 | UTE | LTE | LTE | 139 510 | |
| Bobbin | 82 | 29 | | | NQI | 0.58 | P 1 | 81 010 | -0.80 | UTE | LTE | LTE | 138 510 | |
| Bobbin | 82 | 33 | | | NQI | 0.35 | P 1 | 64 010 | -0.77 | UTE | LTE | LTE | 138 510 | |
| Bobbin | 82 | 36 | | | NQI | 0.47 | P 1 | 41 010 | -0.81 | UTE | LTE | LTE | 114 510 | |
| Bobbin | 82 | 47 | | | ADI | 1.19 | 6 | 83 012 | +26.22 | UTE | LTE | LTE | 115 510 | |
| Bobbin | 82 | 53 | | | NQI | 0.42 | 3 | 93 014 | +2.18 | UTE | LTE | LTE | 115 510 | |
| Bobbin | 82 | 64 | | | NQI | 1.02 | 3 | 91 001 | +1.17 | LTE | UTE | UTE | 5 510 | |
| Bobbin | 82 | 98 | | | NQI | 0.33 | 3 | 92 015 | +27.26 | UTE | LTE | LTE | 85 510 | |
| Bobbin | 82 | 99 | | | NQI | 0.40 | 3 | 110 012 | +1.60 | UTE | LTE | LTE | 86 510 | |
| Bobbin | 82 | 106 | | | NQI | 0.78 | P 1 | 111 014 | -0.79 | UTE | LTE | LTE | 85 510 | |
| Bobbin | 82 | 125 | | | NQI | 0.61 | 3 | 108 014 | +1.61 | UTE | LTE | LTE | 85 510 | |
| Bobbin | 83 | 4 | | | NQI | 1.36 | 3 | 106 010 | -0.81 to +10.76 | 014 | LTE | LTE | 144 510 | |
| Bobbin | 83 | 5 | | | NQI | 0.34 | 3 | 108 010 | +4.96 | 014 | LTE | LTE | 143 510 | |
| Bobbin | | | | | NQI | 0.46 | 3 | 104 010 | +8.62 | 014 | LTE | LTE | 143 510 | |
| Bobbin | | | | | NQI | 0.53 | 3 | 120 010 | +6.63 | 014 | LTE | LTE | 143 510 | |
| Bobbin | 83 | 6 | | | NQI | 0.66 | 3 | 141 010 | +3.19 | 014 | LTE | LTE | 144 510 | |
| Bobbin | | | | | NQI | 0.76 | 3 | 129 010 | +1.62 | 014 | LTE | LTE | 144 510 | |
| Bobbin | 83 | 8 | | | NQI | 0.26 | 3 | 90 007 | +18.91 | 014 | LTE | LTE | 144 510 | |
| Bobbin | 83 | 11 | | | NQI | 0.34 | P 1 | 67 010 | -0.52 | UTE | LTE | LTE | 138 510 | |
| Bobbin | 83 | 12 | | | NQI | 0.53 | P 1 | 58 010 | -0.62 | UTE | LTE | LTE | 139 510 | |
| Bobbin | 83 | 18 | | | NQI | 0.58 | P 1 | 90 008 | +0.43 | UTE | LTE | LTE | 139 510 | |
| Bobbin | 83 | 19 | | | NQI | 0.57 | P 1 | 144 010 | -0.56 | UTE | LTE | LTE | 138 510 | |
| Bobbin | | | | | NQI | 0.69 | P 1 | 146 010 | +0.53 | UTE | LTE | LTE | 138 510 | |
| Bobbin | 83 | 23 | | | NQI | 0.58 | P 1 | 46 010 | -0.84 | UTE | LTE | LTE | 138 510 | |
| Bobbin | 83 | 31 | | | NQI | 0.76 | P 1 | 123 010 | +0.54 | UTE | LTE | LTE | 138 510 | |
| Bobbin | 83 | 32 | | | NQI | 0.32 | 3 | 93 013 | +33.81 | UTE | LTE | LTE | 139 510 | |
| Bobbin | 83 | 34 | | | NQI | 0.26 | P 1 | 67 010 | -0.02 | UTE | LTE | LTE | 139 510 | |
| Bobbin | 83 | 40 | | | NQI | 0.41 | P 1 | 95 009 | +0.50 | UTE | LTE | LTE | 115 510 | |
| Bobbin | 83 | 66 | | | NQI | 0.60 | 3 | 104 001 | +1.23 | LTE | UTE | UTE | 5 510 | |
| Bobbin | 83 | 79 | | | NQI | 0.30 | 3 | 96 009 | +24.12 | UTE | LTE | LTE | 60 510 | |
| Bobbin | 83 | 107 | | | NQI | 0.58 | P 1 | 41 002 | -0.91 | UTE | LTE | LTE | 84 510 | |
| Bobbin | 83 | 115 | | | NQI | 0.33 | 3 | 90 011 | +21.64 | UTE | LTE | LTE | 84 510 | |
| Bobbin | 83 | 128 | | | NQI | 0.41 | 3 | 110 012 | +19.06 | UTE | LTE | LTE | 81 510 | |
| Bobbin | 83 | 131 | | | NQI | 0.43 | 3 | 101 011 | +1.24 | UTE | LTE | LTE | 84 510 | |
| Bobbin | 84 | 1 | | | NQI | 0.73 | P 1 | 110 014 | +0.55 | 014 | LTE | LTE | 144 510 | |
| Bobbin | 84 | 2 | | | NQI | 0.83 | 3 | 49 010 | +4.67 to +18.22 | 014 | LTE | LTE | 143 510 | |
| Bobbin | 84 | 6 | | | NQI | 0.59 | 3 | 74 012 | +5.78 | 014 | LTE | LTE | 144 510 | |
| Bobbin | 84 | 17 | | | NQI | 0.35 | 3 | 91 002 | +12.86 | UTE | LTE | LTE | 138 510 | |
| Bobbin | 84 | 37 | | | NQI | 0.32 | 3 | 102 011 | +36.10 | UTE | LTE | LTE | 115 510 | |
| Bobbin | 84 | 38 | | | NQI | 0.31 | 3 | 90 011 | +23.76 | UTE | LTE | LTE | 114 510 | |
| Bobbin | 84 | 56 | | | ADI | 2.09 | 6 | 82 004 | +16.67 | UTE | LTE | LTE | 115 510 | |
| Bobbin | | | | | NQI | 1.27 | 3 | 124 009 | +25.15 | UTE | LTE | LTE | 115 510 | |
| Bobbin | 84 | 66 | | | NQI | 0.27 | 3 | 100 003 | +25.23 | LTE | UTE | UTE | 4 510 | |
| Bobbin | 84 | 72 | | | ODI | 0.56 | P 1 | 102 013 | +0.64 | LTE | UTE | UTE | 4 510 | |
| Bobbin | 84 | 74 | | | NQI | 0.85 | 3 | 105 013 | +25.21 | LTE | UTE | UTE | 4 510 | |
| Bobbin | 84 | 94 | | | NQI | 0.20 | P 1 | 111 014 | +0.17 | UTE | LTE | LTE | 59 510 | |
| Bobbin | | | | | NQI | 0.23 | P 1 | 93 014 | +0.17 | UTE | LTE | LTE | 60 510 | |
| Bobbin | 84 | 114 | | | ODI | 0.50 | P 1 | 99 014 | +1.00 | UTE | LTE | LTE | 81 510 | |
| Bobbin | 84 | 127 | | | NQI | 0.58 | 3 | 50 007 | +35.79 | UTE | LTE | LTE | 84 510 | |
| Bobbin | 85 | 8 | | | NQI | 0.46 | 3 | 102 012 | +8.84 | UTE | LTE | LTE | 138 510 | |
| Bobbin | 85 | 27 | | | NQI | 0.73 | P 1 | 86 010 | +0.55 | UTE | LTE | LTE | 139 510 | |
| Bobbin | 85 | 44 | | | NQI | 0.59 | 3 | 67 005 | +4.65 | UTE | LTE | LTE | 114 510 | |
| Bobbin | 85 | 54 | | | NQI | 0.54 | P 1 | 52 014 | +0.71 | UTE | LTE | LTE | 115 510 | |
| Bobbin | 85 | 71 | | | NQI | 0.30 | 3 | 105 012 | +30.82 | LTE | UTE | UTE | 7 510 | |
| Bobbin | 85 | 102 | | | NQI | 0.43 | 3 | 71 006 | +26.00 | UTE | LTE | LTE | 84 510 | |
| Bobbin | 85 | 109 | | | NQI | 0.79 | 3 | 106 002 | +37.34 | UTE | LTE | LTE | 81 510 | |
| Bobbin | 85 | 116 | | | ODI | 0.73 | P 1 | 86 014 | +1.06 | UTE | LTE | LTE | 84 510 | |
| Bobbin | 85 | 117 | | | NQI | 0.28 | 3 | 100 014 | +1.22 | UTE | LTE | LTE | 81 510 | |
| Bobbin | 86 | 2 | | | NQI | 0.50 | 3 | 67 010 | +11.68 | 014 | LTE | LTE | 143 510 | |
| Bobbin | | | | | NQI | 0.65 | 3 | 89 010 | +5.67 | 014 | LTE | LTE | 143 510 | |
| Bobbin | 86 | 3 | | | NQI | 0.56 | 3 | 81 010 | +5.10 | 014 | LTE | LTE | 144 510 | |
| Bobbin | | | | | NQI | 1.75 | 3 | 105 010 | +1.85 | 014 | LTE | LTE | 144 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:36:15
 Oconee Nuclear Station - Unit Three
 S/G B
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 16 of 24

ATTACHMENT A-2 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|------|-------|-----|-----|----------|---------|---------|-----|-------|-------|----------|
| Bobbin | 86 | 6 | NQI | 0.59 | P 1 | 79 | 009 | +0.60 | UTE | LTE | LTE | 135 | 510 | |
| Bobbin | 86 | 20 | NQI | 0.25 | 3 | 103 | 009 | +7.60 | UTE | LTE | LTE | 135 | 510 | |
| Bobbin | | | NQI | 0.21 | P 1 | 95 | 013 | -0.04 | UTE | LTE | LTE | 135 | 510 | |
| Bobbin | 86 | 71 | NQI | 0.29 | 3 | 87 | 007 | +5.03 | LTE | UTE | UTE | 5 | 510 | |
| Bobbin | 86 | 102 | NQI | 0.45 | 3 | 82 | LTS | +34.05 | UTE | LTE | LTE | 81 | 510 | |
| Bobbin | 86 | 120 | NQI | 0.64 | P 1 | 91 | 014 | +0.73 | UTE | LTE | LTE | 81 | 510 | |
| Bobbin | 86 | 124 | NQI | 0.41 | 3 | 96 | 012 | +11.22 | UTE | LTE | LTE | 81 | 510 | |
| Bobbin | 86 | 128 | NQI | 0.64 | P 1 | 83 | 006 | +0.72 | UTE | LTE | LTE | 81 | 510 | |
| Bobbin | 87 | 3 | NQI | 0.53 | P 1 | 68 | 012 | +0.70 | 014 | LTE | LTE | 144 | 510 | |
| Bobbin | 87 | 4 | NQI | 0.51 | 3 | 132 | 010 | +2.48 | 014 | LTE | LTE | 143 | 510 | |
| Bobbin | | | NQI | 0.76 | P 1 | 74 | LTE | +2.33 | 014 | LTE | LTE | 143 | 510 | |
| Bobbin | 87 | 40 | NQI | 0.51 | 3 | 75 | 007 | +24.07 | UTE | LTE | LTE | 115 | 510 | |
| Bobbin | 87 | 43 | NQI | 0.30 | 3 | 91 | 007 | +29.37 | UTE | LTE | LTE | 114 | 510 | |
| Bobbin | 87 | 70 | NQI | 2.86 | 3 | 115 | 012 | +11.32 | LTE | UTE | UTE | 5 | 510 | |
| Bobbin | 87 | 129 | NQI | 0.28 | P 1 | 105 | 009 | -0.27 | UTE | LTE | LTE | 80 | 510 | |
| Bobbin | 88 | 11 | NQI | 0.34 | 3 | 66 | 013 | +10.58 | UTE | LTE | LTE | 135 | 510 | |
| Bobbin | 88 | 24 | NQI | 0.30 | 3 | 85 | 009 | +11.78 | UTE | LTE | LTE | 134 | 510 | |
| Bobbin | | | NQI | 0.35 | 3 | 105 | 010 | +20.76 | UTE | LTE | LTE | 134 | 510 | |
| Bobbin | | | NQI | 0.50 | 3 | 101 | 010 | +13.68 | UTE | LTE | LTE | 134 | 510 | |
| Bobbin | 88 | 27 | NQI | 0.26 | 3 | 86 | 010 | +23.98 | UTE | LTE | LTE | 135 | 510 | |
| Bobbin | | | NQI | 0.36 | 3 | 98 | 008 | +34.90 | UTE | LTE | LTE | 135 | 510 | |
| Bobbin | | | NQI | 0.37 | 3 | 97 | 014 | +6.65 | UTE | LTE | LTE | 135 | 510 | |
| Bobbin | | | NQI | 0.49 | 3 | 70 | 009 | +18.94 | UTE | LTE | LTE | 135 | 510 | |
| Bobbin | 88 | 56 | NQI | 0.30 | 3 | 88 | 006 | +13.23 | UTE | LTE | LTE | 114 | 510 | |
| Bobbin | 88 | 71 | NQI | 0.54 | 3 | 113 | 011 | +32.16 | LTE | UTE | UTE | 5 | 510 | |
| Bobbin | | | NQI | 0.67 | 3 | 107 | 010 | +19.54 | LTE | UTE | UTE | 5 | 510 | |
| Bobbin | 88 | 72 | NQI | 0.50 | 3 | 72 | 005 | +34.65 | LTE | UTE | UTE | 5 | 510 | |
| Bobbin | 88 | 129 | NQI | 1.54 | 3 | 82 | 015 | +34.40 | UTE | LTE | LTE | 160 | 510 | |
| Bobbin | 89 | 3 | NQI | 0.81 | 3 | 121 | 009 | +37.83 | 014 | LTE | LTE | 143 | 510 | |
| Bobbin | | | NQI | 1.57 | 3 | 123 | 010 | +1.22 | 014 | LTE | LTE | 143 | 510 | |
| Bobbin | 89 | 5 | NQI | 0.67 | P 1 | 61 | 009 | +0.62 | UTE | LTE | LTE | 135 | 510 | |
| Bobbin | 89 | 21 | NQI | 0.32 | P 1 | 63 | 014 | +1.01 | UTE | LTE | LTE | 135 | 510 | |
| Bobbin | 89 | 65 | NQI | 0.32 | 3 | 137 | 010 | +12.57 | LTE | UTE | UTE | 5 | 510 | |
| Bobbin | 89 | 69 | NQI | 0.36 | 3 | 90 | 007 | +14.76 | LTE | UTE | UTE | 5 | 510 | |
| Bobbin | 89 | 71 | NQI | 0.55 | 3 | 83 | 015 | +37.86 | LTE | UTE | UTE | 5 | 510 | |
| Bobbin | 89 | 127 | NQI | 0.75 | P 1 | 103 | 014 | +0.71 | UTE | LTE | LTE | 77 | 510 | |
| Bobbin | 89 | 128 | NQI | 0.62 | 3 | 113 | 014 | +1.20 | UTE | LTE | LTE | 76 | 510 | |
| Bobbin | 90 | 5 | NQI | 0.40 | 3 | 66 | 009 | +37.03 | UTE | LTE | LTE | 135 | 510 | |
| Bobbin | 90 | 15 | NQI | 0.33 | 3 | 88 | 008 | +28.62 | UTE | LTE | LTE | 135 | 510 | |
| Bobbin | | | NQI | 0.32 | P 1 | 82 | 010 | -1.08 | UTE | LTE | LTE | 135 | 510 | |
| Bobbin | 90 | 47 | NQI | 0.40 | 3 | 115 | 012 | +23.23 | UTE | LTE | LTE | 114 | 510 | |
| Bobbin | 90 | 74 | NQI | 0.38 | P 1 | 98 | 004 | +0.88 | LTE | UTE | UTE | 5 | 510 | |
| Bobbin | 90 | 75 | NQI | 0.38 | 3 | 63 | 005 | +31.25 | LTE | UTE | UTE | 5 | 510 | |
| Bobbin | | | NQI | 0.39 | 3 | 68 | 006 | +37.73 | LTE | UTE | UTE | 5 | 510 | |
| Bobbin | | | NQI | 0.44 | 3 | 94 | 005 | +32.44 | LTE | UTE | UTE | 5 | 510 | |
| Bobbin | | | NQI | 0.53 | 3 | 95 | 006 | +16.99 | LTE | UTE | UTE | 5 | 510 | |
| Bobbin | 90 | 85 | NQI | 0.42 | 3 | 98 | 002 | +27.31 | UTE | LTE | LTE | 56 | 510 | |
| Bobbin | 90 | 91 | NQI | 0.49 | 3 | 107 | 015 | +16.04 | UTE | LTE | LTE | 56 | 510 | |
| Bobbin | 90 | 94 | NQI | 0.37 | 3 | 82 | 007 | +14.61 | UTE | LTE | LTE | 57 | 510 | |
| Bobbin | 90 | 116 | NQI | 0.94 | P 1 | 115 | 014 | +0.75 | UTE | LTE | LTE | 77 | 510 | |
| Bobbin | 90 | 129 | NQI | 0.31 | 3 | 92 | 014 | +1.47 | UTE | LTE | LTE | 76 | 510 | |
| Bobbin | | | NQI | 0.33 | 3 | 113 | 014 | +1.23 | UTE | LTE | LTE | 76 | 510 | |
| Bobbin | 91 | 1 | NQI | 0.41 | 3 | 87 | 010 | +9.53 | UTE | LTE | LTE | 135 | 510 | |
| Bobbin | | | NQI | 0.66 | 3 | 97 | 010 | +8.42 | UTE | LTE | LTE | 135 | 510 | |
| Bobbin | 91 | 3 | NQI | 1.16 | 3 | 52 | 014 | +11.72 | UTE | LTE | LTE | 135 | 510 | |
| Bobbin | 91 | 67 | NQI | 0.45 | 3 | 98 | 011 | +26.01 | LTE | UTE | UTE | 5 | 510 | |
| Bobbin | 91 | 88 | NQI | 0.25 | 3 | 90 | 009 | +35.25 | UTE | LTE | LTE | 56 | 510 | |
| Bobbin | | | NQI | 0.37 | 3 | 77 | 012 | +6.28 | UTE | LTE | LTE | 56 | 510 | |
| Bobbin | 91 | 89 | NQI | 0.51 | 3 | 83 | 004 | +34.48 | UTE | LTE | LTE | 57 | 510 | |
| Bobbin | 91 | 102 | NQI | 0.55 | 3 | 103 | 010 | +28.38 | UTE | LTE | LTE | 76 | 510 | |
| Bobbin | 91 | 108 | NQI | 0.52 | 3 | 99 | 005 | +6.99 | UTE | LTE | LTE | 76 | 510 | |
| Bobbin | 91 | 126 | NQI | 0.20 | P 1 | 87 | 014 | +1.24 | UTE | LTE | LTE | 160 | 510 | |
| Bobbin | 92 | 4 | NQI | 0.40 | P 1 | 92 | 009 | +0.36 | UTE | LTE | LTE | 135 | 510 | |
| Bobbin | 92 | 17 | NQI | 0.44 | 3 | 100 | 010 | +3.13 | UTE | LTE | LTE | 161 | 510 | |
| Bobbin | 92 | 43 | NQI | 0.25 | P 1 | 108 | 015 | +0.62 | UTE | LTE | LTE | 114 | 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:36:15
 Oconee Nuclear Station - Unit Three
 S/G B
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 17 of 24

ATTACHMENT A-2 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|-----|-----|----------|---------|---------|-----|-------|-------|----------|
| Bobbin | 92 | 85 | NQI | | 0.28 | 3 | | 86 006 | +36.25 | UTE | LTE | LTE | 54 | 510 |
| Bobbin | 93 | 6 | ODI | 13 | 0.38 | P 1 | | 93 014 | +1.45 | UTE | LTE | LTE | 135 | 510 |
| Bobbin | 93 | 21 | NQI | | 0.41 | 3 | | 80 007 | +17.61 | UTE | LTE | LTE | 132 | 510 |
| Bobbin | | | NQI | | 0.42 | 3 | | 96 006 | +35.45 | UTE | LTE | LTE | 132 | 510 |
| Bobbin | 93 | 42 | NQI | | 0.71 | P 1 | | 77 015 | +0.52 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 93 | 48 | NQI | | 1.49 | 3 | | 15 008 | +19.51 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 93 | 55 | NQI | | 0.27 | 3 | | 108 008 | +12.65 | UTE | LTE | LTE | 115 | 510 |
| Bobbin | 93 | 69 | NQI | | 0.28 | 3 | | 91 006 | +30.25 | LTE | UTE | UTE | 2 | 510 |
| Bobbin | 93 | 109 | NQI | | 0.65 | 3 | | 122 014 | +1.12 | UTE | LTE | LTE | 77 | 510 |
| Bobbin | | | NQI | | 0.83 | P 1 | | 110 014 | +0.80 | UTE | LTE | LTE | 77 | 510 |
| Bobbin | 93 | 118 | NQI | | 0.51 | P 1 | | 89 014 | +0.95 | UTE | LTE | LTE | 76 | 510 |
| Bobbin | 94 | 2 | NQI | | 0.54 | 3 | | 75 010 | +5.68 | UTE | LTE | LTE | 135 | 510 |
| Bobbin | 94 | 3 | NQI | | 0.50 | P 1 | | 148 010 | +0.75 | UTE | LTE | LTE | 135 | 510 |
| Bobbin | 94 | 10 | NQI | | 0.60 | 3 | | 71 008 | +17.77 | UTE | LTE | LTE | 132 | 510 |
| Bobbin | 94 | 73 | NQI | | 0.34 | 3 | | 106 006 | +23.37 | LTE | UTE | UTE | 2 | 510 |
| Bobbin | 94 | 76 | NQI | | 0.29 | 3 | | 86 015 | +25.61 | LTE | UTE | UTE | 2 | 510 |
| Bobbin | 94 | 103 | NQI | | 0.24 | 3 | | 121 009 | +35.11 | UTE | LTE | LTE | 160 | 510 |
| Bobbin | 94 | 122 | NQI | | 0.47 | 3 | | 127 014 | +1.16 | UTE | LTE | LTE | 77 | 510 |
| Bobbin | 95 | 1 | NQI | | 0.54 | 3 | | 104 015 | +4.40 | UTE | LTE | LTE | 135 | 510 |
| Bobbin | | | NQI | | 0.72 | 3 | | 61 010 | +7.15 | UTE | LTE | LTE | 135 | 510 |
| Bobbin | | | NQI | | 0.86 | 3 | | 89 015 | +6.55 | UTE | LTE | LTE | 135 | 510 |
| Bobbin | | | NQI | | 1.26 | 3 | | 104 015 | +3.27 | UTE | LTE | LTE | 135 | 510 |
| Bobbin | 95 | 2 | NQI | | 0.70 | 3 | | 89 010 | +3.42 | UTE | LTE | LTE | 135 | 510 |
| Bobbin | | | NQI | | 0.56 | P 1 | | 85 010 | -0.73 | UTE | LTE | LTE | 135 | 510 |
| Bobbin | 95 | 55 | NQI | | 0.33 | 3 | | 75 LTS | +14.49 | UTE | LTE | LTE | 111 | 510 |
| Bobbin | 95 | 70 | NQI | | 0.60 | 3 | | 65 003 | +30.28 | UTE | LTE | LTE | 54 | 510 |
| Bobbin | 95 | 79 | NQI | | 0.23 | 3 | | 77 013 | +18.85 | UTE | LTE | LTE | 54 | 510 |
| Bobbin | 95 | 80 | NQI | | 0.32 | P 1 | | 88 006 | +0.14 | UTE | LTE | LTE | 53 | 510 |
| Bobbin | 95 | 128 | NQI | | 0.34 | P 1 | | 104 008 | -0.49 | UTE | LTE | LTE | 70 | 510 |
| Bobbin | 96 | 2 | NQI | | 1.16 | P 1 | | 101 010 | +0.55 | UTE | LTE | LTE | 132 | 510 |
| Bobbin | 96 | 60 | NQI | | 0.36 | 3 | | 45 013 | +2.07 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 96 | 62 | NQI | | 0.35 | 3 | | 57 006 | +3.52 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 96 | 122 | NQI | | 0.45 | 3 | | 93 015 | +30.52 | UTE | LTE | LTE | 71 | 510 |
| Bobbin | 96 | 127 | NQI | | 0.45 | P 1 | | 92 008 | -0.46 | UTE | LTE | LTE | 70 | 510 |
| Bobbin | | | NQI | | 0.48 | P 1 | | 106 008 | -0.66 | UTE | LTE | LTE | 70 | 510 |
| Bobbin | 97 | 2 | NQI | | 0.88 | P 1 | | 103 010 | +0.62 | UTE | LTE | LTE | 131 | 510 |
| Bobbin | 97 | 25 | NQI | | 0.45 | 3 | | 102 008 | +11.44 | UTE | LTE | LTE | 132 | 510 |
| Bobbin | 97 | 61 | NQI | | 0.36 | 3 | | 88 014 | +15.86 | UTE | LTE | LTE | 114 | 510 |
| Bobbin | 97 | 81 | NQI | | 0.33 | 3 | | 95 001 | +10.56 | UTE | LTE | LTE | 50 | 510 |
| Bobbin | 97 | 112 | NQI | | 0.31 | 3 | | 96 014 | +4.87 | UTE | LTE | LTE | 71 | 510 |
| Bobbin | 98 | 66 | NQI | | 0.38 | 3 | | 113 011 | +17.78 | UTE | LTE | LTE | 50 | 510 |
| Bobbin | 99 | 6 | NQI | | 0.46 | 3 | | 114 012 | +35.35 | UTE | LTE | LTE | 127 | 510 |
| Bobbin | 99 | 11 | ODI | 31 | 3.99 | P 1 | | 86 014 | +0.73 | UTE | LTE | LTE | 128 | 510 |
| Bobbin | 99 | 39 | NQI | | 0.40 | 3 | | 82 006 | +30.20 | UTE | LTE | LTE | 111 | 510 |
| Bobbin | 99 | 41 | NQI | | 0.62 | P 1 | | 87 013 | +0.16 | UTE | LTE | LTE | 111 | 510 |
| Bobbin | 99 | 46 | NQI | | 1.05 | P 1 | | 39 005 | -0.88 | UTE | LTE | LTE | 110 | 510 |
| Bobbin | 99 | 62 | NQI | | 0.41 | 3 | | 60 007 | +29.44 | UTE | LTE | LTE | 115 | 510 |
| Bobbin | 99 | 67 | NQI | | 0.32 | 3 | | 110 015 | +34.14 | UTE | LTE | LTE | 50 | 510 |
| Bobbin | | | NQI | | 0.42 | 3 | | 80 015 | +33.90 | UTE | LTE | LTE | 50 | 510 |
| Bobbin | | | NQI | | 0.42 | 3 | | 108 015 | +33.60 | UTE | LTE | LTE | 50 | 510 |
| Bobbin | | | NQI | | 0.52 | 3 | | 106 015 | +27.63 | UTE | LTE | LTE | 50 | 510 |
| Bobbin | 99 | 69 | NQI | | 0.36 | 3 | | 80 012 | +30.20 | UTE | LTE | LTE | 50 | 510 |
| Bobbin | 99 | 71 | NQI | | 0.32 | 3 | | 105 015 | +11.72 | UTE | LTE | LTE | 50 | 510 |
| Bobbin | 99 | 73 | NQI | | 0.49 | P 1 | | 106 UTS | +19.01 | UTE | LTE | LTE | 50 | 510 |
| Bobbin | 99 | 83 | NQI | | 0.26 | 3 | | 101 009 | +2.44 | UTE | LTE | LTE | 50 | 510 |
| Bobbin | 99 | 86 | NQI | | 0.30 | 3 | | 106 012 | +8.52 | UTE | LTE | LTE | 53 | 510 |
| Bobbin | 99 | 91 | NQI | | 0.30 | 3 | | 83 008 | +19.08 | UTE | LTE | LTE | 54 | 510 |
| Bobbin | 99 | 126 | NQI | | 0.55 | P 1 | | 80 008 | -0.64 | UTE | LTE | LTE | 70 | 510 |
| Bobbin | 100 | 2 | NQI | | 0.32 | P 1 | | 87 010 | +0.64 | UTE | LTE | LTE | 127 | 510 |
| Bobbin | 100 | 3 | NQI | | 0.41 | P 1 | | 114 015 | +0.08 | UTE | LTE | LTE | 128 | 510 |
| Bobbin | 100 | 35 | NQI | | 0.35 | 3 | | 109 004 | +18.75 | UTE | LTE | LTE | 110 | 510 |
| Bobbin | 100 | 43 | NQI | | 0.91 | P 1 | | 73 013 | +0.72 | UTE | LTE | LTE | 110 | 510 |
| Bobbin | 100 | 69 | NQI | | 0.45 | 3 | | 91 006 | +12.38 | UTE | LTE | LTE | 50 | 510 |
| Bobbin | 100 | 117 | NQI | | 0.45 | P 1 | | 80 LTS | -0.35 | UTE | LTE | LTE | 70 | 510 |
| Bobbin | 100 | 120 | NQI | | 0.29 | 3 | | 104 011 | +34.88 | UTE | LTE | LTE | 71 | 510 |

FTI TUBAN II (Version 2.3) 05/09/2000 08:36:15
 Oconee Nuclear Station - Unit Three
 S/G B
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 18 of 24

ATTACHMENT A-2 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|-------|-----|----------|------------------|---------|-----|-------|---------|----------|
| Bobbin | | | | | NQI | 0.33 | 3 | 95 010 | +6.41 | UTE | LTE | LTE | 71 510 | |
| Bobbin | 101 | 1 | | | NQI | 0.43 | 3 | 114 010 | +6.98 | UTE | LTE | LTE | 128 510 | |
| Bobbin | | | | | NQI | 0.54 | 3 | 104 010 | +6.56 | UTE | LTE | LTE | 128 510 | |
| Bobbin | 101 | 3 | | | NQI | 0.41 | 3 | 111 008 | +34.50 | UTE | LTE | LTE | 127 510 | |
| Bobbin | 101 | 4 | 11 | | ODI | 1.15 | P 1 | 96 009 | -0.22 | UTE | LTE | LTE | 128 510 | |
| Bobbin | 101 | 18 | | | NQI | 0.31 | 3 | 81 LTS | +25.67 | UTE | LTE | LTE | 128 510 | |
| Bobbin | 101 | 44 | | | NQI | 0.41 | P 1 | 103 014 | +0.41 | UTE | LTE | LTE | 110 510 | |
| Bobbin | 101 | 66 | | | NQI | 0.49 | 3 | 117 013 | +15.70 | UTE | LTE | LTE | 50 510 | |
| Bobbin | 101 | 120 | 14 | | ODI | 0.72 | P 1 | 90 015 | -1.33 | UTE | LTE | LTE | 70 510 | |
| Bobbin | 102 | 2 | | | NQI | 0.88 | P 1 | 120 010 | +0.50 | UTE | LTE | LTE | 127 510 | |
| Bobbin | 102 | 20 | | | NQI | 0.52 | 3 | 129 013 | +21.65 | UTE | LTE | LTE | 127 510 | |
| Bobbin | 102 | 39 | | | NQI | 0.54 | P 1 | 84 014 | -0.35 | UTE | LTE | LTE | 111 510 | |
| Bobbin | 102 | 121 | | | NQI | 0.49 | P 1 | 129 009 | -0.68 | UTE | LTE | LTE | 70 510 | |
| Bobbin | 103 | 10 | | | NQI | 0.52 | P 1 | 90 LTE | +3.81 | UTE | LTE | LTE | 128 510 | |
| Bobbin | 103 | 24 | | | NQI | 0.53 | 3 | 121 013 | +5.62 | UTE | LTE | LTE | 128 510 | |
| Bobbin | | | | | NQI | 0.61 | 3 | 120 012 | +15.74 | UTE | LTE | LTE | 128 510 | |
| Bobbin | 103 | 60 | | | NQI | 0.24 | 3 | 87 014 | +6.97 | UTE | LTE | LTE | 114 510 | |
| Bobbin | 104 | 6 | | | NQI | 0.43 | 3 | 90 007 | +30.30 | UTE | LTE | LTE | 127 510 | |
| Bobbin | 104 | 57 | | | NQI | 0.51 | 3 | 113 005 | +26.47 | UTE | LTE | LTE | 111 510 | |
| Bobbin | 104 | 69 | | | NQI | 0.27 | 3 | 111 LTS | +43.81 | UTE | LTE | LTE | 50 510 | |
| Bobbin | 104 | 89 | 20 | | ODI | 0.51 | 3 | 103 008 | +21.21 | UTE | LTE | LTE | 90 510 | |
| Bobbin | 104 | 93 | | | ADI | 22.53 | 6 | 95 LTS | +20.69 to +32.60 | UTE | LTE | LTE | 90 510 | |
| Bobbin | 104 | 112 | | | NQI | 0.36 | 3 | 81 007 | +20.51 | UTE | LTE | LTE | 71 510 | |
| Bobbin | 105 | 53 | | | NQI | 0.67 | P 1 | 99 UTS | +19.27 | UTE | LTE | LTE | 111 510 | |
| Bobbin | 105 | 65 | | | NQI | 7.36 | 3 | 3 LTS | +5.31 | UTE | LTE | LTE | 50 510 | |
| Bobbin | 105 | 120 | | | NQI | 0.38 | 3 | 98 010 | +4.99 | UTE | LTE | LTE | 70 510 | |
| Bobbin | 105 | 121 | | | NQI | 0.77 | P 1 | 97 008 | -0.72 | UTE | LTE | LTE | 71 510 | |
| Bobbin | 105 | 122 | | | NQI | 3.99 | P 1 | 95 015 | -0.81 | UTE | LTE | LTE | 70 510 | |
| Bobbin | 106 | 4 | | | NQI | 1.18 | P 1 | 111 009 | -0.60 | UTE | LTE | LTE | 127 510 | |
| Bobbin | 106 | 11 | | | NQI | 0.47 | P 1 | 52 004 | -0.83 | UTE | LTE | LTE | 127 510 | |
| Bobbin | 106 | 61 | | | NQI | 0.26 | P 1 | 99 006 | -0.24 | UTE | LTE | LTE | 50 510 | |
| Bobbin | 106 | 63 | | | NQI | 0.49 | 3 | 96 009 | +8.29 | UTE | LTE | LTE | 50 510 | |
| Bobbin | | | | | NQI | 0.58 | 3 | 104 009 | +9.29 | UTE | LTE | LTE | 50 510 | |
| Bobbin | 106 | 84 | | | NQI | 0.32 | 3 | 83 002 | +6.65 | UTE | LTE | LTE | 48 510 | |
| Bobbin | 106 | 119 | | | NQI | 0.39 | 3 | 82 003 | +24.13 | UTE | LTE | LTE | 70 510 | |
| Bobbin | 107 | 20 | | | NQI | 0.53 | 3 | 82 007 | +33.51 | UTE | LTE | LTE | 128 510 | |
| Bobbin | 107 | 46 | | | NQI | 0.79 | P 1 | 66 UTS | +16.30 | UTE | LTE | LTE | 110 510 | |
| Bobbin | 107 | 84 | | | NQI | 0.26 | 3 | 102 004 | +4.79 | UTE | LTE | LTE | 48 510 | |
| Bobbin | | | | | NQI | 0.38 | 3 | 86 011 | +1.40 | UTE | LTE | LTE | 48 510 | |
| Bobbin | | | | | NQI | 0.41 | 3 | 110 001 | +7.00 | UTE | LTE | LTE | 48 510 | |
| Bobbin | 107 | 92 | | | NQI | 0.30 | 3 | 84 011 | +25.71 | UTE | LTE | LTE | 48 510 | |
| Bobbin | 107 | 113 | | | NQI | 0.57 | 3 | 105 008 | +4.06 | UTE | LTE | LTE | 67 510 | |
| Bobbin | 108 | 25 | | | NQI | 0.51 | 3 | 65 008 | +3.06 | UTE | LTE | LTE | 128 510 | |
| Bobbin | 108 | 65 | | | NQI | 0.19 | P 1 | 80 015 | +0.29 | UTE | LTE | LTE | 48 510 | |
| Bobbin | 108 | 85 | | | NQI | 0.43 | 3 | 110 008 | +24.31 | UTE | LTE | LTE | 48 510 | |
| Bobbin | 108 | 86 | | | NQI | 0.62 | P 1 | 146 004 | -0.82 | UTE | LTE | LTE | 47 510 | |
| Bobbin | 108 | 94 | | | NQI | 0.24 | 3 | 88 010 | +5.66 | UTE | LTE | LTE | 67 510 | |
| Bobbin | 108 | 115 | | | NQI | 0.39 | 3 | 91 001 | +9.30 | UTE | LTE | LTE | 66 510 | |
| Bobbin | 108 | 116 | | | NQI | 0.35 | 3 | 95 011 | +20.19 | UTE | LTE | LTE | 67 510 | |
| Bobbin | 109 | 2 | | | NQI | 0.30 | P 1 | 81 015 | +0.14 | UTE | LTE | LTE | 128 510 | |
| Bobbin | 109 | 31 | | | NQI | 0.40 | P 1 | 88 014 | -0.51 | UTE | LTE | LTE | 110 510 | |
| Bobbin | 109 | 49 | | | NQI | 0.25 | 3 | 78 011 | +17.86 | UTE | LTE | LTE | 110 510 | |
| Bobbin | | | | | NQI | 0.37 | 3 | 90 007 | +18.06 | UTE | LTE | LTE | 110 510 | |
| Bobbin | 109 | 61 | | | NQI | 0.38 | 3 | 81 009 | +17.21 | UTE | LTE | LTE | 90 510 | |
| Bobbin | 109 | 65 | | | NQI | 0.26 | 3 | 87 015 | +33.52 | UTE | LTE | LTE | 48 510 | |
| Bobbin | | | | | NQI | 0.34 | 3 | 62 015 | +37.25 | UTE | LTE | LTE | 48 510 | |
| Bobbin | 109 | 69 | | | NQI | 0.44 | 3 | 111 015 | +16.69 | UTE | LTE | LTE | 48 510 | |
| Bobbin | 109 | 99 | | | NQI | 0.54 | 3 | 97 004 | +27.25 | UTE | LTE | LTE | 67 510 | |
| Bobbin | 109 | 106 | | | NQI | 0.29 | 3 | 89 010 | +29.50 | UTE | LTE | LTE | 66 510 | |
| Bobbin | 110 | 5 | | | NQI | 0.34 | P 1 | 63 006 | -0.47 | UTE | LTE | LTE | 128 510 | |
| Bobbin | 110 | 14 | | | NQI | 0.29 | 3 | 72 010 | +8.66 | UTE | LTE | LTE | 127 510 | |
| Bobbin | 110 | 21 | | | NQI | 0.43 | P 1 | 92 015 | -0.82 | UTE | LTE | LTE | 128 510 | |
| Bobbin | 110 | 29 | | | NQI | 0.27 | 3 | 82 011 | +16.77 | UTE | LTE | LTE | 106 510 | |
| Bobbin | | | | | NQI | 0.29 | 3 | 95 011 | +14.94 | UTE | LTE | LTE | 106 510 | |
| Bobbin | 110 | 56 | | | NQI | 0.37 | 3 | 71 006 | +3.26 | UTE | LTE | LTE | 106 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:36:15
 Oconee Nuclear Station - Unit Three
 S/G B
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 19 of 24

ATTACHMENT A-2 - LIST OF IMPERFECTIONS - BOBBIN

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|------|-------|-----|-----|------------------|---------|---------|-----|-------|-------|----------|
| Bobbin | 110 | 85 | NQI | 0.23 | 3 | 97 | 012 | +21.92 | UTE | LTE | LTE | 90 | 510 | |
| Bobbin | 110 | 106 | NQI | 0.41 | 3 | 78 | 013 | +8.86 | UTE | LTE | LTE | 66 | 510 | |
| Bobbin | 111 | 41 | NQI | 0.36 | 3 | 98 | 015 | +31.89 | UTE | LTE | LTE | 107 | 510 | |
| Bobbin | 111 | 82 | NQI | 0.31 | 3 | 109 | 011 | +35.00 | UTE | LTE | LTE | 45 | 510 | |
| Bobbin | | | NQI | 0.40 | 3 | 55 | 002 | +4.01 | UTE | LTE | LTE | 45 | 510 | |
| Bobbin | 112 | 2 | NQI | 0.22 | P 1 | 57 | 014 | +0.02 | UTE | LTE | LTE | 127 | 510 | |
| Bobbin | 112 | 16 | NQI | 0.52 | 3 | 68 | 003 | +8.81 | UTE | LTE | LTE | 127 | 510 | |
| Bobbin | 112 | 17 | NQI | 0.38 | 3 | 99 | 012 | +33.59 | UTE | LTE | LTE | 128 | 510 | |
| Bobbin | 112 | 20 | ADI | 5.87 | 6 | 103 | LTS | +21.26 to +29.09 | UTE | LTE | LTE | 127 | 510 | |
| Bobbin | 112 | 43 | NQI | 0.42 | 3 | 98 | 004 | +19.80 | UTE | LTE | LTE | 106 | 510 | |
| Bobbin | 112 | 59 | NQI | 0.48 | 3 | 92 | 012 | +14.72 | UTE | LTE | LTE | 106 | 510 | |
| Bobbin | 112 | 60 | NQI | 0.30 | 3 | 81 | 014 | +28.76 | UTE | LTE | LTE | 45 | 510 | |
| Bobbin | 112 | 72 | NQI | 0.55 | 3 | 86 | 005 | +8.70 | UTE | LTE | LTE | 45 | 510 | |
| Bobbin | 112 | 83 | NQI | 0.70 | P 1 | 124 | UTS | +13.83 | UTE | LTE | LTE | 46 | 510 | |
| Bobbin | | | NQI | 0.70 | P 1 | 130 | UTS | +16.16 | UTE | LTE | LTE | 46 | 510 | |
| Bobbin | 112 | 107 | NQI | 0.29 | 3 | 95 | 001 | +23.21 | UTE | LTE | LTE | 67 | 510 | |
| Bobbin | 112 | 115 | NQI | 0.78 | P 1 | 129 | 010 | +0.74 | UTE | LTE | LTE | 67 | 510 | |
| Bobbin | 113 | 20 | NQI | 0.56 | 3 | 112 | 010 | +24.65 | UTE | LTE | LTE | 128 | 510 | |
| Bobbin | 113 | 27 | NQI | 0.67 | P 1 | 100 | LTE | +22.36 | UTE | LTE | LTE | 127 | 510 | |
| Bobbin | 113 | 36 | NQI | 0.67 | 3 | 112 | LTS | +21.80 to +28.94 | UTE | LTE | LTE | 106 | 510 | |
| Bobbin | 113 | 66 | NQI | 0.34 | 3 | 76 | 009 | +6.75 | UTE | LTE | LTE | 46 | 510 | |
| Bobbin | 113 | 85 | NQI | 0.41 | 3 | 105 | 008 | +18.64 | UTE | LTE | LTE | 45 | 510 | |
| Bobbin | 113 | 89 | NQI | 0.43 | P 1 | 73 | UTS | +20.12 | UTE | LTE | LTE | 45 | 510 | |
| Bobbin | 113 | 93 | NQI | 0.32 | 3 | 84 | 009 | +12.12 | UTE | LTE | LTE | 67 | 510 | |
| Bobbin | 113 | 100 | NQI | 0.30 | 3 | 108 | 010 | +23.80 | UTE | LTE | LTE | 66 | 510 | |
| Bobbin | 114 | 1 | NQI | 0.81 | P 1 | 85 | 007 | -0.78 | UTE | LTE | LTE | 128 | 510 | |
| Bobbin | 114 | 5 | NQI | 0.47 | 3 | 113 | 008 | +16.83 | UTE | LTE | LTE | 128 | 510 | |
| Bobbin | 114 | 7 | NQI | 0.58 | P 1 | 110 | LTE | +23.26 | UTE | LTE | LTE | 128 | 510 | |
| Bobbin | 114 | 11 | NQI | 0.71 | P 1 | 94 | 014 | +0.75 | UTE | LTE | LTE | 128 | 510 | |
| Bobbin | 114 | 15 | NQI | 0.46 | 3 | 96 | 015 | +20.75 | UTE | LTE | LTE | 128 | 510 | |
| Bobbin | 114 | 18 | NQI | 0.36 | 3 | 93 | 005 | +12.54 | UTE | LTE | LTE | 127 | 510 | |
| Bobbin | | | NQI | 0.45 | 3 | 94 | 007 | +26.72 | UTE | LTE | LTE | 127 | 510 | |
| Bobbin | | | NQI | 0.55 | 3 | 92 | 006 | +19.52 | UTE | LTE | LTE | 127 | 510 | |
| Bobbin | 114 | 67 | NQI | 0.41 | 3 | 103 | 007 | +13.52 | UTE | LTE | LTE | 45 | 510 | |
| Bobbin | 114 | 81 | NQI | 1.69 | P 1 | 94 | UTS | +11.73 | UTE | LTE | LTE | 45 | 510 | |
| Bobbin | 114 | 90 | NQI | 0.42 | 3 | 92 | 007 | +8.15 | UTE | LTE | LTE | 66 | 510 | |
| Bobbin | | | NQI | 0.48 | 3 | 77 | 007 | +7.83 | UTE | LTE | LTE | 66 | 510 | |
| Bobbin | 114 | 114 | NQI | 0.74 | P 1 | 43 | 010 | +0.70 | UTE | LTE | LTE | 66 | 510 | |
| Bobbin | 115 | 4 | NQI | 0.52 | P 1 | 96 | 009 | +0.56 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | | | NQI | 1.00 | P 1 | 63 | 014 | +0.84 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | 115 | 18 | NQI | 0.41 | 3 | 100 | 012 | +1.98 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | 115 | 65 | NQI | 0.35 | 3 | 104 | 014 | +2.32 | UTE | LTE | LTE | 32 | 510 | |
| Bobbin | 115 | 97 | NQI | 0.87 | 3 | 94 | 014 | +1.25 | UTE | LTE | LTE | 45 | 510 | |
| Bobbin | 115 | 98 | NQI | 0.53 | 3 | 95 | 013 | +12.56 | UTE | LTE | LTE | 46 | 510 | |
| Bobbin | 115 | 110 | NQI | 0.80 | 3 | 113 | 009 | +14.29 | UTE | LTE | LTE | 46 | 510 | |
| Bobbin | | | NQI | 1.00 | P 1 | 135 | 009 | -0.72 | UTE | LTE | LTE | 46 | 510 | |
| Bobbin | 115 | 111 | NQI | 2.53 | P 1 | 95 | 008 | -0.61 | UTE | LTE | LTE | 45 | 510 | |
| Bobbin | 116 | 2 | NQI | 0.54 | P 1 | 120 | LTE | +16.70 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | 116 | 49 | NQI | 0.55 | P 1 | 64 | 012 | +0.25 | UTE | LTE | LTE | 102 | 510 | |
| Bobbin | 116 | 82 | NQI | 0.31 | 3 | 99 | 008 | +33.85 | UTE | LTE | LTE | 32 | 510 | |
| Bobbin | 116 | 107 | NQI | 0.29 | P 1 | 81 | 008 | +0.28 | UTE | LTE | LTE | 41 | 510 | |
| Bobbin | 117 | 3 | NQI | 0.50 | 3 | 81 | 002 | +2.59 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | | | NQI | 0.67 | P 1 | 110 | 009 | +0.58 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | 117 | 19 | NQI | 0.87 | 3 | 108 | 004 | +5.14 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | 117 | 26 | NQI | 0.44 | 3 | 113 | 007 | +12.04 | UTE | LTE | LTE | 103 | 510 | |
| Bobbin | 117 | 56 | NQI | 0.45 | 3 | 85 | 015 | +25.21 | UTE | LTE | LTE | 32 | 510 | |
| Bobbin | 117 | 76 | NQI | 0.27 | 3 | 97 | 007 | +24.58 | UTE | LTE | LTE | 32 | 510 | |
| Bobbin | 117 | 83 | ADI | 2.04 | 6 | 69 | 009 | +3.58 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | | | ADI | 2.86 | 6 | 61 | 009 | +4.44 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | | | ADI | 2.87 | 6 | 55 | 009 | +7.81 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 117 | 90 | NQI | 0.26 | P 1 | 80 | 014 | +0.92 | UTE | LTE | LTE | 41 | 510 | |
| Bobbin | 117 | 106 | NQI | 0.69 | P 1 | 108 | 010 | +0.62 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 117 | 108 | NQI | 0.29 | P 1 | 87 | 008 | +0.34 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 118 | 53 | NQI | 0.26 | 3 | 88 | 015 | +5.73 | UTE | LTE | LTE | 103 | 510 | |
| Bobbin | 118 | 56 | NQI | 0.85 | P 1 | 71 | 004 | -0.84 | UTE | LTE | LTE | 31 | 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:36:15
 Oconee Nuclear Station - Unit Three
 S/G B
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 20 of 24

ATTACHMENT A-2 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | *TW | VOLTS | CHN | DEG | LOCATION | | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|-----|-----|----------|------------------|---------|---------|-----|-------|-------|----------|
| Bobbin | 118 | 79 | ODI | 24 | 0.33 | 3 | 102 | 008 | +25.97 | UTE | LTE | LTE | 32 | 510 | |
| Bobbin | 118 | 86 | NQI | | 0.90 | P 1 | 86 | 004 | -0.70 | UTE | LTE | LTE | 41 | 510 | |
| Bobbin | 118 | 99 | NQI | | 1.26 | 3 | 116 | 014 | +27.00 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 118 | 102 | NQI | | 0.27 | 3 | 89 | 015 | +44.05 | UTE | LTE | LTE | 41 | 510 | |
| Bobbin | 118 | 104 | NQI | | 0.22 | P 1 | 81 | 005 | +0.94 | UTE | LTE | LTE | 41 | 510 | |
| Bobbin | 118 | 106 | NQI | | 0.40 | 3 | 102 | 014 | +16.36 | UTE | LTE | LTE | 41 | 510 | |
| Bobbin | | | NQI | | 0.44 | P 1 | 87 | 015 | -0.26 | UTE | LTE | LTE | 41 | 510 | |
| Bobbin | 118 | 107 | NQI | | 0.61 | P 1 | 101 | 015 | -0.43 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 119 | 88 | NQI | | 0.35 | P 1 | 102 | 014 | +0.35 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 119 | 90 | NQI | | 0.39 | 3 | 103 | 003 | +34.08 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 119 | 98 | NQI | | 0.37 | 3 | 111 | 001 | +27.37 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | | | NQI | | 0.78 | 3 | 108 | 001 | +27.72 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 119 | 106 | NQI | | 1.76 | P 1 | 101 | 008 | -0.59 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 120 | 1 | NQI | | 2.12 | 3 | 128 | 015 | +18.19 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | 120 | 78 | NQI | | 0.50 | P 1 | 92 | 013 | +0.62 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 120 | 103 | NQI | | 0.47 | P 1 | 87 | LTS | -0.44 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 120 | 105 | NQI | | 0.57 | P 1 | 97 | 010 | -0.22 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | | | ODI | 24 | 1.49 | P 1 | 99 | 008 | -0.59 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 120 | 107 | NQI | | 0.48 | 3 | 70 | 008 | +3.32 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | | | NQI | | 0.58 | P 1 | 60 | 015 | -0.44 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 121 | 1 | NQI | | 0.50 | 3 | 109 | 013 | +2.15 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | 121 | 78 | NQI | | 0.34 | 3 | 82 | 015 | +36.76 | UTE | LTE | LTE | 31 | 510 | |
| Bobbin | 121 | 105 | NQI | | 0.33 | P 1 | 73 | LTS | -0.39 | UTE | LTE | LTE | 41 | 510 | |
| Bobbin | 122 | 3 | NQI | | 0.61 | P 1 | 83 | 009 | -0.71 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | 122 | 47 | NQI | | 0.44 | 3 | 83 | 009 | +5.96 | UTE | LTE | LTE | 102 | 510 | |
| Bobbin | 122 | 51 | NQI | | 0.22 | 3 | 90 | 011 | +19.05 | UTE | LTE | LTE | 102 | 510 | |
| Bobbin | 122 | 58 | NQI | | 0.78 | 3 | 93 | 013 | +8.78 | UTE | LTE | LTE | 28 | 510 | |
| Bobbin | 122 | 82 | NQI | | 0.52 | 3 | 95 | 014 | +23.51 | UTE | LTE | LTE | 28 | 510 | |
| Bobbin | 122 | 84 | NQI | | 0.25 | 3 | 95 | 009 | +21.53 | UTE | LTE | LTE | 90 | 510 | |
| Bobbin | | | NQI | | 0.31 | 3 | 100 | 008 | +16.74 | UTE | LTE | LTE | 90 | 510 | |
| Bobbin | | | NQI | | 0.31 | 3 | 104 | 008 | +18.23 | UTE | LTE | LTE | 90 | 510 | |
| Bobbin | | | NQI | | 0.39 | 3 | 101 | 005 | +8.53 | UTE | LTE | LTE | 90 | 510 | |
| Bobbin | | | NQI | | 0.47 | 3 | 87 | 011 | +29.40 | UTE | LTE | LTE | 90 | 510 | |
| Bobbin | | | NQI | | 0.63 | 3 | 107 | 007 | +10.42 | UTE | LTE | LTE | 90 | 510 | |
| Bobbin | 122 | 103 | NQI | | 1.76 | P 1 | 107 | 008 | -0.67 | UTE | LTE | LTE | 41 | 510 | |
| Bobbin | 122 | 104 | ODI | 26 | 0.89 | P 1 | 98 | 010 | +0.52 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 122 | 105 | NQI | | 1.01 | P 1 | 115 | 015 | -0.49 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 123 | 1 | NQI | | 0.64 | 3 | 70 | 015 | +16.87 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | 123 | 3 | NQI | | 0.55 | P 1 | 106 | 009 | +0.64 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | 123 | 9 | NQI | | 0.31 | P 1 | 98 | LTS | -0.35 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | 123 | 57 | NQI | | 0.67 | 3 | 87 | 011 | +24.56 | UTE | LTE | LTE | 27 | 510 | |
| Bobbin | 123 | 97 | NQI | | 0.40 | 3 | 105 | 001 | +10.73 | UTE | LTE | LTE | 41 | 510 | |
| Bobbin | 123 | 98 | NQI | | 0.61 | P 1 | 128 | 009 | -0.44 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 123 | 100 | NQI | | 0.82 | 3 | 115 | 014 | +1.58 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 123 | 103 | ADI | | 2.32 | 6 | 67 | 014 | +31.31 | UTE | LTE | LTE | 41 | 510 | |
| Bobbin | | | NQI | | 0.32 | P 1 | 105 | 004 | -0.46 | UTE | LTE | LTE | 41 | 510 | |
| Bobbin | 124 | 3 | NQI | | 0.83 | P 1 | 137 | 009 | +0.57 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | 124 | 6 | NQI | | 0.45 | 3 | 77 | 012 | +10.39 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | 124 | 14 | NQI | | 0.46 | P 1 | 76 | LTS | -0.43 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | 124 | 91 | NQI | | 0.30 | 3 | 74 | 008 | +33.18 | UTE | LTE | LTE | 41 | 510 | |
| Bobbin | 124 | 94 | ODI | 1 | 1.19 | 3 | 115 | 014 | +1.41 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 124 | 95 | NQI | | 0.34 | 3 | 98 | 014 | +16.01 | UTE | LTE | LTE | 41 | 510 | |
| Bobbin | 124 | 100 | NQI | | 0.59 | 3 | 110 | 007 | +16.39 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 124 | 101 | NQI | | 0.72 | 3 | 107 | 011 | +4.33 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 125 | 7 | NQI | | 0.66 | P 1 | 83 | 009 | -0.77 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | 125 | 27 | NQI | | 0.51 | 3 | 73 | 003 | +11.98 | UTE | LTE | LTE | 99 | 510 | |
| Bobbin | 125 | 28 | NQI | | 1.23 | 3 | 118 | LTS | +21.50 to +22.30 | UTE | LTE | LTE | 98 | 510 | |
| Bobbin | 125 | 52 | NQI | | 1.30 | P 1 | 123 | 004 | -0.70 | UTE | LTE | LTE | 28 | 510 | |
| Bobbin | 125 | 54 | NQI | | 0.44 | 3 | 87 | 010 | +23.15 | UTE | LTE | LTE | 28 | 510 | |
| Bobbin | | | NQI | | 0.88 | 3 | 79 | 015 | +12.02 | UTE | LTE | LTE | 28 | 510 | |
| Bobbin | 125 | 60 | NQI | | 0.35 | 3 | 100 | 007 | +28.93 | UTE | LTE | LTE | 28 | 510 | |
| Bobbin | 125 | 90 | NQI | | 0.61 | 3 | 78 | 009 | +29.48 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 125 | 98 | NQI | | 0.25 | P 1 | 81 | 010 | -0.39 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | | | NQI | | 0.42 | P 1 | 113 | 015 | -0.17 | UTE | LTE | LTE | 42 | 510 | |
| Bobbin | 125 | 99 | NQI | | 0.39 | P 1 | 108 | 015 | -0.21 | UTE | LTE | LTE | 41 | 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:36:15
 Oconee Nuclear Station - Unit Three
 S/G B
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 21 of 24

ATTACHMENT A-2 - LIST OF IMPERFECTIONS - BOBBIN

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|------|-----|----------|------------------|---------|-----|-------|---------|----------|
| Bobbin | | | | | NQI | 1.27 | P 1 | 61 014 | +0.77 | UTE | LTE | LTE | 41 510 | |
| Bobbin | 125 | 100 | | | NQI | 1.06 | 3 | 113 010 | +18.59 | UTE | LTE | LTE | 42 510 | |
| Bobbin | 126 | 3 | | | NQI | 0.56 | P 1 | 82 005 | -0.25 | UTE | LTE | LTE | 118 510 | |
| Bobbin | 126 | 4 | ODI | 13 | 0.82 | 3 | | 112 008 | +33.75 | UTE | LTE | LTE | 119 510 | |
| Bobbin | 126 | 7 | | | NQI | 0.68 | P 1 | 112 009 | +0.60 | UTE | LTE | LTE | 118 510 | |
| Bobbin | 126 | 9 | | | NQI | 0.63 | P 1 | 38 004 | -0.78 | UTE | LTE | LTE | 118 510 | |
| Bobbin | 126 | 16 | | | NQI | 0.34 | 3 | 112 012 | +16.18 | UTE | LTE | LTE | 118 510 | |
| Bobbin | 126 | 28 | | | NQI | 0.66 | P 1 | 75 004 | -0.72 | UTE | LTE | LTE | 98 510 | |
| Bobbin | 126 | 40 | | | NQI | 1.07 | P 1 | 56 014 | +0.72 | UTE | LTE | LTE | 98 510 | |
| Bobbin | 126 | 56 | | | NQI | 1.03 | 3 | 111 013 | +11.95 | UTE | LTE | LTE | 27 510 | |
| Bobbin | 126 | 74 | | | NQI | 0.41 | 3 | 107 010 | +9.09 | UTE | LTE | LTE | 27 510 | |
| Bobbin | 126 | 75 | | | NQI | 0.31 | 3 | 74 LTS | +32.10 | UTE | LTE | LTE | 28 510 | |
| Bobbin | 126 | 81 | | | NQI | 0.32 | 3 | 97 012 | +24.12 | UTE | LTE | LTE | 28 510 | |
| Bobbin | 126 | 84 | | | NQI | 0.60 | 3 | 64 002 | +31.00 | UTE | LTE | LTE | 41 510 | |
| Bobbin | 126 | 97 | | | NQI | 0.96 | 3 | 120 005 | +1.12 | UTE | LTE | LTE | 42 510 | |
| Bobbin | | | | | NQI | 0.53 | P 1 | 86 008 | +0.59 | UTE | LTE | LTE | 42 510 | |
| Bobbin | 127 | 3 | | | NQI | 0.54 | P 1 | 74 LTS | -0.37 | UTE | LTE | LTE | 119 510 | |
| Bobbin | 127 | 6 | | | NQI | 0.37 | P 1 | 68 009 | -0.75 | UTE | LTE | LTE | 118 510 | |
| Bobbin | 127 | 14 | | | NQI | 0.34 | 3 | 109 008 | +4.31 | UTE | LTE | LTE | 118 510 | |
| Bobbin | 127 | 15 | | | NQI | 0.52 | 3 | 55 015 | +10.21 | UTE | LTE | LTE | 119 510 | |
| Bobbin | 127 | 47 | | | NQI | 0.36 | 3 | 102 014 | +1.98 | UTE | LTE | LTE | 98 510 | |
| Bobbin | 127 | 53 | | | NQI | 0.34 | 3 | 67 015 | +27.63 | UTE | LTE | LTE | 28 510 | |
| Bobbin | 127 | 55 | | | NQI | 0.63 | 3 | 98 013 | +20.71 | UTE | LTE | LTE | 28 510 | |
| Bobbin | | | | | NQI | 1.45 | 3 | 88 013 | +25.49 | UTE | LTE | LTE | 28 510 | |
| Bobbin | 127 | 72 | | | NQI | 0.39 | 3 | 66 009 | +31.61 | UTE | LTE | LTE | 27 510 | |
| Bobbin | 127 | 73 | | | NQI | 0.44 | 3 | 100 014 | +28.44 | UTE | LTE | LTE | 28 510 | |
| Bobbin | 127 | 74 | | | NQI | 0.43 | 3 | 92 LTS | +21.61 | UTE | LTE | LTE | 27 510 | |
| Bobbin | 128 | 11 | | | NQI | 0.41 | 3 | 103 LTS | +6.39 | UTE | LTE | LTE | 119 510 | |
| Bobbin | 128 | 16 | | | NQI | 0.36 | P 1 | 99 014 | +1.04 | UTE | LTE | LTE | 118 510 | |
| Bobbin | 128 | 42 | | | NQI | 0.35 | 3 | 91 008 | +37.66 | UTE | LTE | LTE | 98 510 | |
| Bobbin | 128 | 47 | | | NQI | 0.26 | 3 | 89 012 | +24.59 | UTE | LTE | LTE | 99 510 | |
| Bobbin | 128 | 52 | | | NQI | 3.53 | 3 | 83 003 | +12.55 | UTE | LTE | LTE | 27 510 | |
| Bobbin | 128 | 56 | | | NQI | 0.29 | 3 | 85 004 | +13.48 | UTE | LTE | LTE | 27 510 | |
| Bobbin | 128 | 94 | | | NQI | 0.26 | P 1 | 80 005 | +1.04 | UTE | LTE | LTE | 35 510 | |
| Bobbin | 129 | 2 | | | NQI | 0.46 | P 1 | 142 010 | +0.64 | UTE | LTE | LTE | 118 510 | |
| Bobbin | 129 | 4 | | | NQI | 0.91 | P 1 | 41 004 | -0.83 | UTE | LTE | LTE | 118 510 | |
| Bobbin | 129 | 18 | | | NQI | 2.39 | 3 | 15 011 | +13.08 | UTE | LTE | LTE | 98 510 | |
| Bobbin | 129 | 41 | | | NQI | 0.51 | 3 | 59 013 | +19.69 | UTE | LTE | LTE | 99 510 | |
| Bobbin | 129 | 49 | | | NQI | 0.50 | P 1 | 137 004 | -0.69 | UTE | LTE | LTE | 28 510 | |
| Bobbin | 129 | 75 | | | NQI | 0.34 | 3 | 109 008 | +22.40 | UTE | LTE | LTE | 28 510 | |
| Bobbin | | | | | NQI | 0.37 | 3 | 101 015 | +7.89 | UTE | LTE | LTE | 28 510 | |
| Bobbin | | | | | NQI | 0.48 | 3 | 101 LTS | +25.01 | UTE | LTE | LTE | 28 510 | |
| Bobbin | 129 | 90 | | | NQI | 0.37 | P 1 | 85 009 | -0.55 | UTE | LTE | LTE | 36 510 | |
| Bobbin | 129 | 94 | | | NQI | 1.12 | P 1 | 119 010 | -0.62 | UTE | LTE | LTE | 36 510 | |
| Bobbin | 130 | 4 | | | NQI | 0.38 | 3 | 76 003 | +30.63 | UTE | LTE | LTE | 118 510 | |
| Bobbin | 130 | 5 | ODI | 18 | 0.32 | 3 | | 108 015 | +31.25 | UTE | LTE | LTE | 119 510 | |
| Bobbin | | | | | NQI | 0.57 | P 1 | 130 010 | +0.49 | UTE | LTE | LTE | 119 510 | |
| Bobbin | 130 | 9 | | | NQI | 0.82 | P 1 | 96 004 | -0.79 | UTE | LTE | LTE | 119 510 | |
| Bobbin | 130 | 18 | | | NQI | 0.43 | 3 | 93 010 | +21.34 | UTE | LTE | LTE | 99 510 | |
| Bobbin | 130 | 24 | ADI | | 2.60 | 6 | | 95 LTS | +17.65 to +31.08 | UTE | LTE | LTE | 99 510 | |
| Bobbin | 130 | 44 | | | NQI | 0.34 | 3 | 97 LTS | +23.67 | UTE | LTE | LTE | 99 510 | |
| Bobbin | 130 | 46 | | | NQI | 0.26 | 3 | 99 009 | +13.63 | UTE | LTE | LTE | 99 510 | |
| Bobbin | 130 | 50 | | | NQI | 0.46 | 3 | 94 007 | +17.62 | UTE | LTE | LTE | 28 510 | |
| Bobbin | 130 | 57 | | | NQI | 0.40 | 3 | 111 011 | +29.33 | UTE | LTE | LTE | 27 510 | |
| Bobbin | 130 | 81 | | | NQI | 0.42 | 3 | 87 008 | +25.82 | UTE | LTE | LTE | 35 510 | |
| Bobbin | 130 | 86 | | | NQI | 0.36 | 3 | 86 009 | +34.56 | UTE | LTE | LTE | 36 510 | |
| Bobbin | 130 | 91 | | | NQI | 0.72 | P 1 | 88 010 | +0.69 | UTE | LTE | LTE | 35 510 | |
| Bobbin | 131 | 5 | | | NQI | 0.51 | P 1 | 108 010 | +0.60 | UTE | LTE | LTE | 118 510 | |
| Bobbin | | | | | NQI | 0.74 | P 1 | 60 009 | +0.69 | UTE | LTE | LTE | 118 510 | |
| Bobbin | 131 | 35 | | | NQI | 0.27 | 3 | 108 008 | +24.52 | UTE | LTE | LTE | 99 510 | |
| Bobbin | 131 | 63 | | | NQI | 0.29 | P 1 | 104 002 | -0.44 | UTE | LTE | LTE | 28 510 | |
| Bobbin | 131 | 81 | | | NQI | 0.45 | 3 | 84 002 | +16.72 | UTE | LTE | LTE | 35 510 | |
| Bobbin | 131 | 82 | | | NQI | 0.57 | 3 | 71 009 | +4.65 | UTE | LTE | LTE | 36 510 | |
| Bobbin | 132 | 3 | | | NQI | 0.24 | P 1 | 80 015 | +0.04 | UTE | LTE | LTE | 118 510 | |
| Bobbin | | | | | NQI | 0.62 | P 1 | 85 015 | -0.46 | UTE | LTE | LTE | 118 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:36:15
 Oconee Nuclear Station - Unit Three
 S/G B
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 22 of 24

ATTACHMENT A-2 - LIST OF IMPERFECTIONS - BOBBIN

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|----------|-----|-----|------------------|---------|---------|-----|-------|-------|----------|
| Bobbin | 132 | 5 | NQI | | 0.58 P 1 | 76 | 010 | -0.77 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | 132 | 7 | NQI | | 0.72 P 1 | 41 | 004 | -0.79 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | 132 | 8 | NQI | | 0.55 3 | 97 | 009 | +14.76 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | 132 | 9 | ADI | | 1.39 6 | 81 | LTE | +8.46 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | 132 | 13 | NQI | | 0.74 P 1 | 128 | 008 | +0.56 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | 132 | 49 | DWI | | 1.40 3 | 20 | 015 | +3.18 | UTE | LTE | LTE | 23 | 510 | |
| Bobbin | 132 | 54 | NQI | | 0.67 P 1 | 41 | 015 | +0.78 | UTE | LTE | LTE | 23 | 510 | |
| Bobbin | 132 | 67 | NQI | | 0.54 3 | 76 | 007 | +27.51 | UTE | LTE | LTE | 23 | 510 | |
| Bobbin | 132 | 84 | NQI | | 0.43 P 1 | 95 | 008 | +0.44 | UTE | LTE | LTE | 36 | 510 | |
| Bobbin | 132 | 85 | NQI | | 1.23 3 | 126 | 014 | +33.73 | UTE | LTE | LTE | 36 | 510 | |
| Bobbin | | | ODI | 17 | 0.74 P 1 | 103 | 011 | +0.27 | UTE | LTE | LTE | 36 | 510 | |
| Bobbin | 133 | 1 | ADI | | 1.89 6 | 71 | 015 | -1.33 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | | | NQI | | 0.80 P 1 | 41 | 004 | -0.81 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | 133 | 5 | NQI | | 0.20 P 1 | 57 | 010 | +0.00 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | | | NQI | | 0.83 P 1 | 136 | 010 | +0.64 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | | | NQI | | 1.26 P 1 | 91 | 010 | -0.81 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | 133 | 6 | NQI | | 0.70 3 | 131 | 009 | +15.84 to +24.41 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | 133 | 9 | NQI | | 0.69 P 1 | 59 | 009 | +0.61 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | 133 | 14 | NQI | | 0.18 P 1 | 65 | 012 | +1.56 | UTE | LTE | LTE | 99 | 510 | |
| Bobbin | 133 | 28 | NQI | | 0.41 P 1 | 60 | UTS | +16.49 | UTE | LTE | LTE | 99 | 510 | |
| Bobbin | 133 | 35 | NQI | | 1.09 3 | 105 | 002 | +16.35 | UTE | LTE | LTE | 98 | 510 | |
| Bobbin | 133 | 57 | NQI | | 0.37 3 | 98 | LTS | +19.68 | UTE | LTE | LTE | 24 | 510 | |
| Bobbin | 133 | 66 | NQI | | 0.77 P 1 | 47 | 008 | -0.29 | UTE | LTE | LTE | 23 | 510 | |
| Bobbin | 133 | 86 | NQI | | 0.37 P 1 | 104 | 010 | +0.50 | UTE | LTE | LTE | 36 | 510 | |
| Bobbin | 134 | 1 | NQI | | 0.43 3 | 109 | 010 | +6.90 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | 134 | 2 | NQI | | 0.83 P 1 | 46 | 004 | -0.77 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | 134 | 6 | NQI | | 0.87 P 1 | 162 | 010 | +0.60 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | 134 | 8 | NQI | | 0.82 P 1 | 129 | 010 | +0.56 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | 134 | 14 | NQI | | 0.25 3 | 77 | 014 | +31.85 | UTE | LTE | LTE | 99 | 510 | |
| Bobbin | 134 | 41 | NQI | | 0.23 3 | 95 | 001 | +28.65 | UTE | LTE | LTE | 99 | 510 | |
| Bobbin | 134 | 76 | NQI | | 0.29 3 | 71 | 014 | +26.06 | UTE | LTE | LTE | 36 | 510 | |
| Bobbin | 134 | 85 | NQI | | 0.77 3 | 97 | 010 | +1.10 | UTE | LTE | LTE | 36 | 510 | |
| Bobbin | 135 | 1 | NQI | | 0.57 P 1 | 102 | 015 | +0.06 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | 135 | 3 | NQI | | 0.60 3 | 111 | 009 | +37.93 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | 135 | 5 | NQI | | 0.69 P 1 | 145 | 010 | +0.60 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | 135 | 6 | NQI | | 0.56 P 1 | 101 | 010 | -0.76 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | | | NQI | | 1.19 3 | 117 | 009 | +15.96 to +24.92 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | 135 | 14 | NQI | | 0.39 P 1 | 112 | 006 | -0.51 | UTE | LTE | LTE | 99 | 510 | |
| Bobbin | 135 | 33 | NQI | | 0.69 3 | 89 | 011 | +36.50 | UTE | LTE | LTE | 98 | 510 | |
| Bobbin | 135 | 36 | NQI | | 0.68 P 1 | 123 | 004 | -0.70 | UTE | LTE | LTE | 99 | 510 | |
| Bobbin | 136 | 2 | NQI | | 0.33 3 | 109 | 012 | +3.20 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | 136 | 5 | NQI | | 0.67 P 1 | 93 | 014 | +0.75 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | 136 | 19 | NQI | | 0.48 P 1 | 129 | 015 | -0.74 | UTE | LTE | LTE | 99 | 510 | |
| Bobbin | 136 | 35 | NQI | | 0.29 3 | 93 | 014 | +31.32 | UTE | LTE | LTE | 99 | 510 | |
| Bobbin | 136 | 37 | NQI | | 0.59 3 | 96 | 002 | +18.60 | UTE | LTE | LTE | 99 | 510 | |
| Bobbin | 136 | 39 | NQI | | 0.24 3 | 90 | 010 | +10.93 | UTE | LTE | LTE | 99 | 510 | |
| Bobbin | 136 | 69 | NQI | | 1.38 P 1 | 71 | 003 | +0.75 | UTE | LTE | LTE | 23 | 510 | |
| Bobbin | 136 | 70 | NQI | | 1.06 P 1 | 125 | 003 | +0.77 | UTE | LTE | LTE | 24 | 510 | |
| Bobbin | 136 | 80 | NQI | | 0.47 3 | 112 | 014 | +32.18 | UTE | LTE | LTE | 36 | 510 | |
| Bobbin | | | NQI | | 0.49 3 | 106 | 014 | +33.20 | UTE | LTE | LTE | 36 | 510 | |
| Bobbin | 137 | 1 | ODI | 30 | 0.52 3 | 98 | 011 | +24.34 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | | | NQI | | 0.38 P 1 | 97 | 011 | -0.35 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | 137 | 4 | ODI | 21 | 0.36 P 1 | 94 | 010 | -0.52 | UTE | LTE | LTE | 119 | 510 | |
| Bobbin | 137 | 7 | NQI | | 0.60 3 | 83 | 014 | +22.09 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | 137 | 42 | NQI | | 0.99 P 1 | 51 | 014 | +0.71 | UTE | LTE | LTE | 23 | 510 | |
| Bobbin | 137 | 67 | NQI | | 1.70 3 | 74 | 001 | +4.03 | UTE | LTE | LTE | 24 | 510 | |
| Bobbin | 137 | 70 | NQI | | 0.38 3 | 97 | LTS | +37.06 | UTE | LTE | LTE | 23 | 510 | |
| Bobbin | 137 | 72 | NQI | | 0.30 3 | 83 | 010 | +20.49 | UTE | LTE | LTE | 35 | 510 | |
| Bobbin | | | NQI | | 0.66 P 1 | 133 | 009 | -0.60 | UTE | LTE | LTE | 35 | 510 | |
| Bobbin | 138 | 2 | NQI | | 0.92 3 | 111 | LTS | +20.83 to +29.10 | UTE | LTE | LTE | 118 | 510 | |
| Bobbin | 138 | 10 | NQI | | 0.42 P 1 | 97 | 006 | -0.47 | UTE | LTE | LTE | 99 | 510 | |
| Bobbin | 138 | 21 | NQI | | 0.40 3 | 83 | LTS | +40.44 | UTE | LTE | LTE | 98 | 510 | |
| Bobbin | 138 | 22 | NQI | | 0.39 P 1 | 117 | 007 | -0.57 | UTE | LTE | LTE | 99 | 510 | |
| Bobbin | 138 | 30 | NQI | | 0.41 P 1 | 83 | 002 | -0.43 | UTE | LTE | LTE | 99 | 510 | |
| Bobbin | 138 | 66 | NQI | | 0.36 3 | 105 | 012 | +2.03 | UTE | LTE | LTE | 23 | 510 | |

FTI TUBAN II (Version 2.3) 05/09/2000 08:36:15
 Oconee Nuclear Station - Unit Three
 S/G B
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 23 of 24

ATTACHMENT A-2 - LIST OF IMPERFECTIONS - BOBBIN
 OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|-----|-------|------|-----|----------|---------|---------|-----|-------|-------|----------|
| Bobbin | | | | | NQI | 0.48 | 3 | 101 013 | +12.39 | UTE | LTE | LTE | 23 | 510 |
| Bobbin | 138 | 68 | | | NQI | 0.64 | P 1 | 89 003 | +0.80 | UTE | LTE | LTE | 23 | 510 |
| Bobbin | 138 | 70 | | | NQI | 0.18 | 3 | 118 014 | +4.60 | UTE | LTE | LTE | 35 | 510 |
| Bobbin | | | | | NQI | 0.30 | 3 | 107 014 | +5.38 | UTE | LTE | LTE | 35 | 510 |
| Bobbin | 139 | 1 | | | NQI | 1.45 | 3 | 110 010 | +11.66 | UTE | LTE | LTE | 119 | 510 |
| Bobbin | 139 | 20 | | | NQI | 0.27 | 3 | 70 009 | +17.08 | UTE | LTE | LTE | 99 | 510 |
| Bobbin | 139 | 29 | | | NQI | 1.35 | 3 | 99 009 | +7.73 | UTE | LTE | LTE | 98 | 510 |
| Bobbin | 139 | 36 | | | NQI | 0.24 | 3 | 82 008 | +20.24 | UTE | LTE | LTE | 99 | 510 |
| Bobbin | | | | | NQI | 0.27 | 3 | 76 010 | +7.49 | UTE | LTE | LTE | 99 | 510 |
| Bobbin | 139 | 68 | | | NQI | 0.91 | P 1 | 58 003 | +0.80 | UTE | LTE | LTE | 23 | 510 |
| Bobbin | 140 | 27 | | | NQI | 0.49 | 3 | 103 009 | +38.71 | UTE | LTE | LTE | 93 | 510 |
| Bobbin | 140 | 51 | | | NQI | 0.38 | 3 | 90 011 | +11.16 | UTE | LTE | LTE | 24 | 510 |
| Bobbin | | | | | NQI | 0.53 | 3 | 96 015 | +10.58 | UTE | LTE | LTE | 24 | 510 |
| Bobbin | 141 | 1 | | | NQI | 1.46 | P 1 | 112 014 | +33.67 | UTE | LTE | LTE | 119 | 510 |
| Bobbin | 141 | 15 | | | NQI | 0.30 | 3 | 95 011 | +6.22 | UTE | LTE | LTE | 95 | 510 |
| Bobbin | 141 | 17 | | | NQI | 0.31 | 3 | 91 014 | +31.56 | UTE | LTE | LTE | 95 | 510 |
| Bobbin | 141 | 27 | | | NQI | 0.34 | 3 | 65 012 | +30.00 | UTE | LTE | LTE | 95 | 510 |
| Bobbin | 141 | 61 | | | NQI | 0.53 | 3 | 74 007 | +24.34 | UTE | LTE | LTE | 20 | 510 |
| Bobbin | 141 | 62 | | | ADI | 1.36 | 6 | 55 LTS | +18.91 | UTE | LTE | LTE | 20 | 510 |
| Bobbin | | | | | ADI | 1.44 | 6 | 71 LTS | +9.30 | UTE | LTE | LTE | 20 | 510 |
| Bobbin | | | | | ADI | 2.29 | 6 | 57 LTS | +7.62 | UTE | LTE | LTE | 20 | 510 |
| Bobbin | | | | | ADI | 3.27 | 6 | 74 002 | +10.50 | UTE | LTE | LTE | 20 | 510 |
| Bobbin | | | | | ADI | 3.41 | 6 | 53 002 | +9.18 | UTE | LTE | LTE | 20 | 510 |
| Bobbin | 142 | 5 | | | NQI | 0.71 | P 1 | 112 009 | +0.54 | UTE | LTE | LTE | 95 | 510 |
| Bobbin | 142 | 8 | | | NQI | 0.72 | P 1 | 123 009 | -0.63 | UTE | LTE | LTE | 95 | 510 |
| Bobbin | 142 | 27 | | | NQI | 0.34 | 3 | 81 012 | +13.10 | UTE | LTE | LTE | 95 | 510 |
| Bobbin | | | | | NQI | 0.38 | 3 | 98 007 | +7.20 | UTE | LTE | LTE | 95 | 510 |
| Bobbin | | | | | NQI | 1.86 | 3 | 109 005 | +25.39 | UTE | LTE | LTE | 95 | 510 |
| Bobbin | 142 | 62 | | | NQI | 0.29 | 3 | 85 015 | +8.33 | UTE | LTE | LTE | 20 | 510 |
| Bobbin | 142 | 63 | | | NQI | 0.47 | 3 | 110 009 | +29.21 | UTE | LTE | LTE | 20 | 510 |
| Bobbin | | | | | NQI | 0.76 | 3 | 107 005 | +16.39 | UTE | LTE | LTE | 20 | 510 |
| Bobbin | 142 | 65 | | | NQI | 1.97 | 3 | 135 015 | +13.23 | UTE | LTE | LTE | 36 | 510 |
| Bobbin | 143 | 3 | | | NQI | 0.43 | 3 | 86 011 | +18.74 | UTE | LTE | LTE | 95 | 510 |
| Bobbin | 143 | 6 | | | NQI | 0.41 | 3 | 88 002 | +33.64 | UTE | LTE | LTE | 95 | 510 |
| Bobbin | | | | | NQI | 0.84 | 3 | 101 003 | +21.46 | UTE | LTE | LTE | 95 | 510 |
| Bobbin | 143 | 13 | | | NQI | 0.50 | P 1 | 104 006 | -0.56 | UTE | LTE | LTE | 93 | 510 |
| Bobbin | 143 | 16 | | | NQI | 0.49 | P 1 | 106 006 | -0.59 | UTE | LTE | LTE | 95 | 510 |
| Bobbin | | | | | NQI | 0.57 | P 1 | 75 009 | -0.78 | UTE | LTE | LTE | 95 | 510 |
| Bobbin | 143 | 25 | | | NQI | 0.86 | P 1 | 79 009 | -0.75 | UTE | LTE | LTE | 95 | 510 |
| Bobbin | 143 | 29 | | | NQI | 0.29 | 3 | 94 001 | +12.73 | UTE | LTE | LTE | 95 | 510 |
| Bobbin | | | | | NQI | 0.34 | 3 | 68 LTS | +42.56 | UTE | LTE | LTE | 95 | 510 |
| Bobbin | 143 | 33 | | | NQI | 0.53 | 3 | 76 002 | +36.33 | UTE | LTE | LTE | 20 | 510 |
| Bobbin | 143 | 49 | | | NQI | 0.44 | 3 | 82 009 | +30.03 | UTE | LTE | LTE | 20 | 510 |
| Bobbin | 143 | 52 | | | NQI | 0.73 | P 1 | 94 UTS | +16.66 | UTE | LTE | LTE | 20 | 510 |
| Bobbin | 144 | 14 | | | NQI | 1.70 | P 1 | 98 009 | -0.69 | UTE | LTE | LTE | 95 | 510 |
| Bobbin | 144 | 16 | | | NQI | 0.27 | 3 | 104 010 | +24.68 | UTE | LTE | LTE | 95 | 510 |
| Bobbin | 144 | 26 | | | NQI | 0.27 | P 1 | 64 015 | -0.08 | UTE | LTE | LTE | 95 | 510 |
| Bobbin | 144 | 40 | | | NQI | 0.60 | P 1 | 131 009 | +0.57 | UTE | LTE | LTE | 20 | 510 |
| Bobbin | 144 | 52 | | | NQI | 0.23 | P 1 | 103 009 | -0.12 | UTE | LTE | LTE | 20 | 510 |
| Bobbin | 145 | 37 | | | NQI | 0.46 | P 1 | 116 009 | +0.47 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | 145 | 41 | | | NQI | 0.61 | P 1 | 61 009 | +0.61 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | 145 | 42 | | | NQI | 0.70 | P 1 | 75 009 | +0.69 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | 145 | 44 | | | NQI | 0.41 | P 1 | 99 009 | +0.61 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | 145 | 46 | | | NQI | 0.52 | P 1 | 80 009 | +0.69 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | 145 | 48 | | | NQI | 0.49 | P 1 | 97 009 | +0.67 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | 145 | 49 | | | NQI | 0.62 | P 1 | 100 010 | +0.68 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | 145 | 50 | | | ODI | 0.35 | 3 | 100 011 | +20.84 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | 145 | 51 | | | NQI | 0.71 | P 1 | 105 010 | +0.66 | UTE | LTE | LTE | 17 | 510 |
| Bobbin | 146 | 10 | | | NQI | 0.59 | P 1 | 148 008 | +0.45 | UTE | LTE | LTE | 93 | 510 |
| Bobbin | 146 | 11 | | | ODI | 0.37 | P 1 | 95 014 | +1.33 | UTE | LTE | LTE | 95 | 510 |
| Bobbin | 146 | 15 | | | NQI | 0.66 | P 1 | 95 009 | -0.69 | UTE | LTE | LTE | 95 | 510 |
| Bobbin | 146 | 36 | | | NQI | 0.64 | 3 | 94 015 | -1.35 | UTE | LTE | LTE | 13 | 510 |
| Bobbin | 146 | 37 | | | NQI | 0.37 | 3 | 114 015 | +1.81 | UTE | LTE | LTE | 13 | 510 |
| Bobbin | | | | | NQI | 0.64 | P 1 | 96 015 | -0.52 | UTE | LTE | LTE | 13 | 510 |
| Bobbin | 146 | 41 | | | NQI | 0.62 | 3 | 107 014 | +32.36 | UTE | LTE | LTE | 13 | 510 |

FTI TUBAN II (Version 2.3) 05/09/2000 08:36:15
 Oconee Nuclear Station - Unit Three
 S/G B
 04/00 RFO
 Bobbin,Sleeve Bobbin

Page 24 of 24

ATTACHMENT A-2 - LIST OF IMPERFECTIONS - BOBBIN

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-----------|-----|------|-----|------|-------|-----|-----|------------------|---------|---------|-----|-------|-------|----------|
| Bobbin | 146 | 44 | NQI | 0.71 | P 1 | 134 | 010 | +0.70 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | 146 | 48 | NQI | 0.64 | P 1 | 83 | 010 | +0.59 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | 146 | 49 | NQI | 0.95 | P 1 | 96 | 015 | -0.34 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | 147 | 34 | NQI | 0.37 | 3 | 76 | 009 | +23.79 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | 147 | 37 | NQI | 0.56 | P 1 | 72 | 015 | -0.50 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | 147 | 41 | NQI | 0.43 | P 1 | 80 | 010 | +0.54 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | 147 | 43 | NQI | 0.95 | 3 | 112 | 014 | +1.04 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | 147 | 45 | NQI | 0.63 | 3 | 106 | 014 | +30.93 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | 147 | 46 | NQI | 1.48 | 3 | 113 | 015 | -1.33 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | 148 | 10 | NQI | 0.41 | P 1 | 104 | 009 | -0.41 | UTE | LTE | LTE | 95 | 510 | |
| Bobbin | 148 | 12 | NQI | 0.71 | P 1 | 124 | 008 | +0.51 | UTE | LTE | LTE | 95 | 510 | |
| Bobbin | 148 | 23 | NQI | 0.66 | 3 | 83 | 011 | +30.60 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | 148 | 25 | NQI | 0.32 | 3 | 108 | 013 | +5.42 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | 148 | 28 | NQI | 0.30 | P 1 | 39 | 004 | -0.81 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | 148 | 34 | NQI | 0.43 | 3 | 109 | 009 | +12.20 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | | | NQI | 0.38 | 3 | 103 | 010 | +2.15 to +7.73 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | 148 | 35 | NQI | 0.29 | 3 | 94 | 010 | +12.11 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | | | NQI | 0.30 | 3 | 75 | 010 | +14.46 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | 148 | 40 | NQI | 1.03 | 3 | 114 | 014 | +30.52 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | 149 | 1 | NQI | 0.68 | 3 | 115 | 015 | +14.72 | UTE | LTE | LTE | 95 | 510 | |
| Bobbin | 149 | 3 | NQI | 0.36 | 3 | 131 | 014 | -1.22 | UTE | LTE | LTE | 95 | 510 | |
| Bobbin | 149 | 13 | NQI | 0.31 | 3 | 72 | 011 | +26.81 | UTE | LTE | LTE | 95 | 510 | |
| Bobbin | 149 | 16 | NQI | 0.54 | 3 | 117 | 010 | +1.23 | UTE | LTE | LTE | 93 | 510 | |
| Bobbin | 149 | 17 | NQI | 0.62 | 3 | 107 | 010 | +1.27 | UTE | LTE | LTE | 95 | 510 | |
| Bobbin | | | NQI | 0.35 | P 1 | 116 | 010 | +0.76 | UTE | LTE | LTE | 95 | 510 | |
| Bobbin | 149 | 30 | NQI | 0.44 | P 1 | 87 | 010 | +0.53 | UTE | LTE | LTE | 90 | 510 | |
| Bobbin | | | NQI | 0.62 | P 1 | 58 | 011 | +0.57 | UTE | LTE | LTE | 90 | 510 | |
| Bobbin | | | NQI | 0.63 | P 1 | 92 | 010 | -0.66 | UTE | LTE | LTE | 90 | 510 | |
| Bobbin | 149 | 32 | NQI | 0.45 | 3 | 116 | 014 | +2.82 | UTE | LTE | LTE | 90 | 510 | |
| Bobbin | 149 | 33 | NQI | 0.56 | 3 | 84 | 011 | +8.75 | UTE | LTE | LTE | 89 | 510 | |
| Bobbin | 149 | 34 | NQI | 0.85 | P 1 | 87 | 015 | -0.18 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | 150 | 17 | NQI | 0.52 | 3 | 105 | 014 | +5.53 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | | | ODI | 0.65 | P 1 | 96 | 010 | +0.54 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | 150 | 18 | NQI | 0.45 | 3 | 80 | 015 | +8.36 | UTE | LTE | LTE | 12 | 510 | |
| Bobbin | | | NQI | 0.55 | 3 | 87 | 015 | +7.47 | UTE | LTE | LTE | 12 | 510 | |
| Bobbin | 150 | 21 | NQI | 0.35 | 3 | 102 | 014 | +31.77 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | | | ODI | 0.88 | P 1 | 108 | 015 | -1.23 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | 150 | 23 | NQI | 0.42 | 3 | 103 | 013 | +3.78 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | | | NQI | 0.87 | 3 | 104 | 011 | +3.26 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | | | NQI | 0.87 | 3 | 111 | 012 | +2.83 to +5.69 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | 150 | 26 | NQI | 0.71 | 3 | 94 | 014 | +4.13 | UTE | LTE | LTE | 12 | 510 | |
| Bobbin | | | NQI | 0.85 | 3 | 98 | 013 | +4.42 | UTE | LTE | LTE | 12 | 510 | |
| Bobbin | 150 | 27 | NQI | 0.52 | 3 | 110 | 012 | +9.40 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | | | NQI | 0.44 | 3 | 108 | 013 | +3.44 to +12.45 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | | | NQI | 0.69 | 3 | 110 | 014 | +3.28 to +6.76 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | 151 | 2 | NQI | 0.30 | 3 | 72 | 015 | +12.34 | UTE | LTE | LTE | 93 | 510 | |
| Bobbin | 151 | 6 | NQI | 0.36 | P 1 | 72 | 013 | -0.76 | UTE | LTE | LTE | 93 | 510 | |
| Bobbin | 151 | 12 | NQI | 0.69 | 3 | 85 | 012 | +1.22 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | | | NQI | 0.44 | 3 | 104 | 014 | +31.28 to +33.90 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | | | NQI | 0.52 | 3 | 99 | 015 | +7.29 to +10.34 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | 151 | 16 | NQI | 1.06 | 3 | 114 | 013 | +3.70 | UTE | LTE | LTE | 13 | 510 | |
| Bobbin | | | NQI | 2.14 | 3 | 134 | 015 | -1.32 | UTE | LTE | LTE | 13 | 510 | |

Total Indications Found = 1547

Total Tubes Found = 1254

ATTACHMENT A-3 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|-------|-----|-----|----------|------------------|---------|-----|-------|--------|----------|
| HL ROLL TRANSITION | 1 | 2 | SAI | | 2.37 | 2 | 19 | UTE | -0.24 | UTE | UTE | UTE | 42 460 | |
| HL ROLL TRANSITION | | | SCI | | 0.41 | P 1 | 25 | UTE | -0.31 | UTE | UTE | UTE | 42 460 | |
| MRPC Special Int. | 2 | 15 | WAR | 6 | 0.26 | P 3 | 0 | 010 | +0.66 | 010 | 010 | UTE | 22 460 | WAR |
| MRPC Special Int. | 2 | 19 | WAR | 6 | 0.51 | P 3 | 0 | 010 | +0.50 | 010 | 010 | UTE | 22 460 | WAR |
| MRPC Special Int. | 3 | 3 | VOL | | 0.28 | 2 | 89 | 013 | +4.58 | 013 | 013 | UTE | 42 460 | |
| MRPC Special Int. | 3 | 6 | VOL | | 0.11 | 2 | 46 | 003 | +15.82 | 003 | 003 | UTE | 42 460 | |
| MRPC Special Int. | 3 | 7 | VOL | | 2.25 | 2 | 74 | UTS | -19.23 to -10.89 | UTS | UTS | UTE | 42 460 | |
| MRPC H/L Plugs | 3 | 8 | SAI | | 12.31 | 1 | 18 | UTE | -1.19 | UTE | UTE | UTE | 5 410 | |
| MRPC Special Int. | 3 | 10 | VOL | | 2.15 | 1 | 115 | 015 | -1.26 | 015 | 015 | UTE | 42 460 | |
| MRPC Special Int. | 3 | 13 | WAR | 9 | 0.42 | P 3 | 92 | 013 | -0.49 | 013 | 013 | UTE | 42 460 | WAR |
| MRPC Special Int. | 3 | 14 | VOL | | 0.18 | 2 | 98 | 015 | +0.71 | 015 | 015 | UTE | 42 460 | |
| MRPC Special Int. | | | VOL | | 0.15 | P 1 | 60 | 015 | -0.44 | 015 | 015 | UTE | 42 460 | |
| MRPC Special Int. | 3 | 24 | WAR | 4 | 0.33 | P 3 | 0 | 010 | +0.47 | 010 | 010 | UTE | 22 460 | WAR |
| MRPC Special Int. | 3 | 27 | VOL | | 0.29 | 2 | 88 | 003 | +3.51 | 003 | 003 | UTE | 22 460 | |
| MRPC Special Int. | 3 | 32 | SAI | | 0.04 | 2 | 75 | 011 | -4.59 | 011 | 011 | UTE | 22 460 | |
| MRPC Special Int. | | | SAI | | 0.04 | 2 | 104 | 011 | -5.70 | 011 | 011 | UTE | 22 460 | |
| MRPC Special Int. | | | SAI | | 0.08 | 2 | 66 | 011 | -5.54 | 011 | 011 | UTE | 22 460 | |
| MRPC Special Int. | 4 | 16 | VOL | | 0.05 | 2 | 90 | LTS | +9.37 | LTS | LTS | UTE | 42 460 | |
| MRPC Special Int. | 5 | 8 | VOL | | 0.14 | 2 | 79 | 015 | +13.69 | 015 | 015 | UTE | 42 460 | |
| MRPC Special Int. | 5 | 41 | SAI | | 0.11 | 2 | 86 | 015 | -6.62 | 015 | 015 | UTE | 22 460 | |
| MRPC Special Int. | 5 | 44 | WAR | 6 | 0.24 | P 3 | 0 | 011 | -0.73 | 011 | 011 | UTE | 22 460 | WAR |
| MRPC Special Int. | 6 | 8 | SVI | | 0.12 | 2 | 87 | 009 | +1.51 | 009 | 009 | UTE | 42 460 | |
| MRPC Special Int. | 6 | 10 | VOL | | 0.19 | 2 | 99 | 010 | +3.06 | 010 | 010 | UTE | 42 460 | |
| MRPC Special Int. | 6 | 15 | SAI | | 0.31 | 2 | 58 | 015 | -6.19 | 015 | 015 | UTE | 42 460 | |
| MRPC Special Int. | 6 | 22 | WAR | 6 | 0.30 | P 3 | 100 | 009 | -0.57 | 009 | 009 | UTE | 42 460 | WAR |
| MRPC Special Int. | | | WAR | 7 | 0.32 | P 3 | 86 | 009 | +0.43 | 009 | 009 | UTE | 42 460 | WAR |
| MRPC Special Int. | 6 | 35 | VOL | | 0.48 | 2 | 128 | 009 | +0.39 | 009 | 009 | UTE | 22 460 | |
| MRPC Special Int. | 7 | 10 | WAR | 8 | 0.39 | P 3 | 91 | 008 | -0.71 | 008 | 008 | UTE | 42 460 | WAR |
| MRPC Special Int. | 7 | 13 | VOL | | 0.07 | 2 | 65 | 013 | +22.93 | 013 | 013 | UTE | 42 460 | |
| MRPC Special Int. | 7 | 14 | VOL | | 0.30 | 2 | 87 | 010 | -19.18 to -14.62 | 010 | 010 | UTE | 42 460 | |
| MRPC Special Int. | 7 | 17 | SAI | | 0.14 | 2 | 74 | 015 | -4.68 | 015 | 015 | UTE | 42 460 | |
| MRPC Special Int. | 7 | 19 | WAR | 10 | 0.48 | P 3 | 72 | 009 | -0.63 | 009 | 009 | UTE | 42 460 | WAR |
| MRPC Special Int. | 7 | 20 | WAR | 11 | 0.58 | P 3 | 0 | 009 | -0.61 | 009 | 009 | UTE | 42 460 | WAR |
| MRPC Special Int. | 7 | 45 | WAR | 11 | 0.90 | P 3 | 0 | 009 | -0.56 | 009 | 009 | UTE | 22 460 | WAR |
| MRPC Special Int. | 7 | 48 | VOL | | 0.08 | 2 | 58 | 005 | +1.02 | 005 | 005 | UTE | 22 460 | |
| MRPC Special Int. | 7 | 52 | VOL | | 0.31 | 2 | 121 | 010 | +0.50 | 010 | 010 | UTE | 22 460 | |
| MRPC Special Int. | 8 | 7 | VOL | | 0.13 | 2 | 58 | 007 | +21.53 | 007 | 007 | UTE | 42 460 | |
| MRPC Special Int. | 8 | 9 | WAR | 6 | 0.27 | P 3 | 69 | 008 | -0.65 | 008 | 008 | UTE | 42 460 | WAR |
| MRPC Special Int. | 8 | 11 | WAR | 8 | 0.39 | P 3 | 85 | 008 | -0.56 | 008 | 008 | UTE | 42 460 | WAR |
| MRPC Special Int. | 8 | 12 | VOL | | 0.38 | 2 | 101 | 009 | +21.98 to +26.56 | 009 | 009 | UTE | 42 460 | |
| MRPC Special Int. | 8 | 13 | VOL | | 0.26 | 2 | 93 | 009 | +21.36 to +25.98 | 009 | 009 | UTE | 42 460 | |
| MRPC Special Int. | 8 | 14 | VOL | | 0.28 | 2 | 104 | 009 | +20.48 to +27.25 | 009 | 009 | UTE | 42 460 | |
| MRPC Special Int. | 8 | 20 | VOL | | 0.18 | 2 | 120 | 009 | -0.63 | 009 | 009 | UTE | 42 460 | |
| MRPC Special Int. | 8 | 27 | VOL | | 0.14 | 2 | 75 | 014 | +1.18 | 014 | 014 | UTE | 42 460 | |
| MRPC Special Int. | 8 | 42 | VOL | | 0.44 | 2 | 129 | 009 | -0.59 | 009 | 009 | UTE | 19 460 | |
| MRPC Special Int. | 9 | 10 | VOL | | 0.50 | 2 | 86 | 010 | -15.87 to -8.53 | 010 | 010 | UTE | 42 460 | |
| MRPC Special Int. | 9 | 11 | VOL | | 0.39 | 1 | 31 | 010 | -18.00 to -8.12 | 010 | 010 | UTE | 42 460 | |
| MRPC Special Int. | 9 | 13 | VOL | | 0.42 | 2 | 86 | 010 | -21.90 to -9.07 | 010 | 010 | UTE | 42 460 | |
| MRPC Special Int. | 9 | 14 | VOL | | 0.38 | 2 | 97 | 010 | -19.44 to -16.24 | 010 | 010 | UTE | 42 460 | |
| MRPC Special Int. | 9 | 15 | VOL | | 0.41 | 2 | 85 | 010 | -20.68 to -13.87 | 010 | 010 | UTE | 42 460 | |
| MRPC Special Int. | 9 | 16 | VOL | | 0.25 | 2 | 92 | 010 | -20.61 to -18.68 | 010 | 010 | UTE | 42 460 | |
| MRPC Special Int. | 9 | 17 | VOL | | 0.06 | 2 | 66 | 012 | +9.79 | 012 | 012 | UTE | 42 460 | |
| MRPC Special Int. | 9 | 29 | VOL | | 0.24 | 2 | 76 | 014 | +1.19 | 014 | 014 | UTE | 42 460 | |
| MRPC Special Int. | 9 | 55 | VOL | | 0.27 | P 1 | 101 | 010 | -18.24 to -9.75 | 010 | 010 | UTE | 19 460 | |
| MRPC Special Int. | 10 | 2 | WAR | 7 | 0.30 | P 3 | 50 | 008 | -0.78 | 008 | 008 | UTE | 42 460 | WAR |
| MRPC Special Int. | 10 | 12 | VOL | | 0.18 | 2 | 60 | 015 | +1.03 | UTS | 015 | UTE | 40 460 | |
| MRPC Special Int. | | | VOL | | 0.19 | 2 | 88 | 015 | +36.45 | UTS | 015 | UTE | 40 460 | |
| MRPC Special Int. | 10 | 18 | VOL | | 0.35 | 2 | 132 | 008 | -0.66 | 008 | 008 | UTE | 40 460 | |
| MRPC Special Int. | 10 | 19 | VOL | | 0.39 | 2 | 136 | 008 | -0.70 | 008 | 008 | UTE | 40 460 | |
| MRPC Special Int. | | | VOL | | 0.52 | 2 | 94 | 009 | -0.43 | 009 | 009 | UTE | 40 460 | |
| MRPC Special Int. | 10 | 20 | VOL | | 0.18 | 2 | 95 | 010 | +1.23 | 010 | 010 | UTE | 40 460 | |
| MRPC Special Int. | 10 | 44 | VOL | | 0.45 | 2 | 106 | 009 | +0.25 | 009 | 009 | UTE | 19 460 | |
| MRPC Special Int. | 10 | 57 | VOL | | 0.33 | 2 | 99 | 009 | +18.43 to +28.65 | 010 | 009 | UTE | 19 460 | |
| MRPC Special Int. | 10 | 58 | VOL | | 0.17 | 2 | 60 | 010 | -13.81 | 010 | 010 | UTE | 19 460 | |
| MRPC Special Int. | 11 | 1 | WAR | 9 | 0.41 | P 3 | 0 | 008 | -0.56 | 008 | 008 | UTE | 28 460 | WAR |

ATTACHMENT A-3 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|----------|-----|-----|----------|------------------|---------|-----|-------|--------|----------|
| MRPC Special Int. | 11 | 16 | VOL | | 0.41 2 | | 130 | 008 | -0.64 | 008 | 008 | UTE | 40 460 | |
| MRPC Special Int. | 11 | 22 | VOL | | 0.30 2 | | 111 | 007 | -0.66 | 007 | 007 | UTE | 40 460 | |
| MRPC Special Int. | 12 | 12 | VOL | | 0.12 2 | | 73 | 006 | -15.05 | 006 | 006 | UTE | 40 460 | |
| MRPC Special Int. | 12 | 14 | VOL | | 0.34 2 | | 122 | 015 | +0.50 | 015 | 015 | UTE | 40 460 | |
| MRPC Special Int. | 12 | 42 | VOL | | 0.14 2 | | 43 | UTS | +6.27 | UTS | UTS | UTE | 19 460 | |
| MRPC Special Int. | 12 | 57 | VOL | | 0.62 2 | | 111 | 007 | -0.75 | 007 | 007 | UTE | 19 460 | |
| MRPC Special Int. | 12 | 58 | VOL | | 0.41 2 | | 98 | 009 | +0.59 | 009 | 009 | UTE | 19 460 | |
| MRPC Special Int. | 12 | 65 | SAI | | 0.28 2 | | 64 | 015 | +5.73 | 015 | 015 | UTE | 19 460 | |
| MRPC Special Int. | | | SAI | | 0.32 2 | | 64 | 015 | +3.74 | 015 | 015 | UTE | 19 460 | |
| MRPC Special Int. | 12 | 70 | WAR | 7 | 0.62 P 3 | | 0 | 008 | -0.52 | 008 | 008 | UTE | 47 460 | WAR |
| MRPC Special Int. | 13 | 31 | VOL | | 0.56 2 | | 65 | 011 | -0.73 | 011 | 011 | UTE | 40 460 | |
| MRPC Special Int. | 13 | 36 | VOL | | 0.20 2 | | 71 | 004 | +12.49 | 004 | 004 | UTE | 40 460 | |
| MRPC Special Int. | 13 | 47 | VOL | | 0.15 P 1 | | 84 | 014 | +1.15 | 014 | 014 | UTE | 19 460 | |
| MRPC Special Int. | 13 | 67 | SAI | | 0.19 2 | | 68 | 014 | +20.00 | 014 | 014 | UTE | 19 460 | |
| MRPC Special Int. | 13 | 69 | SAI | | 0.32 2 | | 79 | 011 | +9.73 | 012 | 011 | UTE | 19 460 | |
| MRPC Special Int. | | | SAI | | 0.42 2 | | 69 | 011 | +9.73 | 011 | 011 | LTE | 48 520 | |
| MRPC Special Int. | | | SAI | | 0.40 2 | | 72 | 011 | +28.65 to +30.81 | 012 | 011 | UTE | 19 460 | |
| MRPC Special Int. | 13 | 72 | VOL | | 0.24 2 | | 131 | 010 | -0.03 | 010 | 010 | UTE | 47 460 | |
| MRPC Special Int. | 14 | 9 | WAR | 12 | 0.53 P 3 | | 109 | 015 | +0.66 | 015 | 015 | UTE | 40 460 | WAR |
| MRPC Special Int. | 14 | 19 | WAR | 12 | 0.56 P 3 | | 53 | 007 | -0.59 | 007 | 007 | UTE | 40 460 | WAR |
| MRPC Special Int. | 14 | 53 | VOL | | 0.24 2 | | 58 | 003 | +22.91 | 003 | 003 | UTE | 19 460 | |
| MRPC Special Int. | 14 | 66 | WAR | 9 | 0.48 P 3 | | 0 | 015 | -0.11 | 015 | 015 | LTE | 48 520 | WAR |
| MRPC Special Int. | 14 | 70 | SAI | | 0.26 2 | | 98 | 015 | +0.18 | 015 | 015 | UTE | 47 460 | |
| MRPC Special Int. | 14 | 74 | WAR | 4 | 0.40 P 3 | | 0 | 010 | +0.33 | 010 | 010 | UTE | 47 460 | WAR |
| MRPC Special Int. | 15 | 5 | WAR | 6 | 0.29 P 3 | | 0 | 009 | +0.42 | 009 | 009 | UTE | 28 460 | WAR |
| MRPC Special Int. | 15 | 77 | VOL | | 0.16 2 | | 65 | 013 | -11.09 | 013 | 013 | UTE | 47 460 | |
| MRPC Special Int. | | | VOL | | 0.21 2 | | 83 | LTS | +0.62 | LTS | LTS | UTE | 47 460 | |
| MRPC Special Int. | 16 | 46 | VOL | | 0.12 2 | | 56 | LTS | +25.91 | LTS | LTS | UTE | 19 460 | |
| MRPC Special Int. | 17 | 2 | WAR | 7 | 0.31 P 3 | | 0 | 010 | +0.50 | 010 | 010 | UTE | 28 460 | WAR |
| MRPC Special Int. | 17 | 5 | WAR | 8 | 0.40 P 3 | | 0 | 008 | +0.31 | 008 | 008 | UTE | 28 460 | WAR |
| MRPC Special Int. | 17 | 10 | WAR | 5 | 0.21 P 3 | | 0 | 009 | -0.70 | 009 | 009 | UTE | 28 460 | WAR |
| MRPC Special Int. | 17 | 35 | SAI | | 0.13 2 | | 84 | 014 | -14.03 | 014 | 014 | UTE | 40 460 | |
| MRPC Special Int. | 17 | 74 | VOL | | 0.24 2 | | 136 | 011 | -0.71 | 011 | 011 | UTE | 47 460 | |
| MRPC Special Int. | 17 | 75 | VOL | | 0.15 2 | | 81 | 009 | +18.18 to +29.97 | 009 | 009 | UTE | 47 460 | |
| MRPC Special Int. | 17 | 76 | VOL | | 0.09 2 | | 151 | 010 | -29.58 to -10.44 | 010 | 010 | UTE | 47 460 | |
| MRPC Special Int. | 17 | 77 | VOL | | 0.15 2 | | 89 | 010 | -18.00 to -11.41 | 010 | 010 | UTE | 47 460 | |
| MRPC Special Int. | 17 | 78 | VOL | | 0.20 2 | | 102 | 010 | -22.59 to -14.15 | 010 | 010 | UTE | 47 460 | |
| MRPC Special Int. | 17 | 79 | VOL | | 0.40 2 | | 90 | 014 | +0.72 | 014 | 014 | UTE | 47 460 | |
| MRPC Special Int. | 18 | 10 | WAR | 9 | 0.41 P 3 | | 0 | 009 | -0.68 | 009 | 009 | UTE | 28 460 | WAR |
| MRPC Special Int. | 18 | 75 | VOL | | 0.06 2 | | 96 | 014 | +1.02 | 014 | 014 | UTE | 47 460 | |
| MRPC Special Int. | | | VOL | | 0.08 2 | | 65 | 010 | -23.76 to -12.73 | 010 | 010 | UTE | 47 460 | |
| MRPC Special Int. | 18 | 76 | VOL | | 0.18 2 | | 74 | 014 | +0.83 | 014 | 014 | UTE | 47 460 | |
| MRPC Special Int. | 18 | 77 | WAR | 7 | 0.55 P 3 | | 0 | 014 | +0.67 | 014 | 014 | UTE | 47 460 | WAR |
| MRPC Special Int. | | | VOL | | 0.45 2 | | 84 | 010 | -27.57 to -12.07 | 010 | 010 | UTE | 47 460 | |
| MRPC Special Int. | 19 | 77 | VOL | | 0.13 2 | | 61 | 014 | +1.10 | 014 | 014 | UTE | 47 460 | |
| MRPC Special Int. | 20 | 38 | VOL | | 0.24 2 | | 46 | 014 | +0.54 | 014 | 014 | UTE | 40 460 | |
| MRPC Special Int. | 20 | 85 | SAI | | 0.15 2 | | 119 | 015 | -3.07 to -1.13 | 015 | 015 | UTE | 47 460 | |
| MRPC Special Int. | 21 | 5 | WAR | 9 | 0.50 P 3 | | 75 | 009 | -0.45 | 009 | 009 | UTE | 55 460 | WAR |
| MRPC Special Int. | 21 | 33 | VOL | | 0.18 2 | | 112 | 015 | +0.78 | 015 | 015 | UTE | 40 460 | |
| MRPC Special Int. | 21 | 62 | VOL | | 0.17 2 | | 49 | 015 | -7.18 | 015 | 015 | UTE | 19 460 | |
| HL ROLL TRANSITION | 22 | 20 | SAI | | 0.98 2 | | 19 | UTE | -0.28 | UTE | UTE | UTE | 40 460 | |
| MRPC Special Int. | 22 | 91 | WAR | 15 | 1.36 P 3 | | 0 | 010 | +0.51 | 010 | 010 | UTE | 47 460 | WAR |
| MRPC Special Int. | 23 | 2 | VOL | | 0.39 2 | | 0 | 010 | +0.42 | 010 | 010 | UTE | 28 460 | |
| MRPC Special Int. | 23 | 3 | VOL | | 0.20 2 | | 0 | 009 | +14.24 | 009 | 009 | UTE | 28 460 | |
| MRPC Special Int. | 23 | 5 | WAR | 5 | 0.25 P 3 | | 0 | 009 | -0.58 | 009 | 009 | UTE | 28 460 | WAR |
| MRPC Special Int. | 24 | 4 | VOL | | 0.50 2 | | 85 | 009 | +0.53 | 009 | 009 | UTE | 24 460 | |
| MRPC Special Int. | 24 | 44 | VOL | | 0.19 2 | | 41 | 014 | +0.22 | 014 | 014 | UTE | 40 460 | |
| MRPC Special Int. | 25 | 83 | VOL | | 0.12 2 | | 57 | UTS | -12.37 | UTS | UTS | UTE | 47 460 | |
| MRPC Special Int. | 25 | 91 | VOL | | 0.46 2 | | 64 | 013 | -13.06 | 013 | 013 | UTE | 47 460 | |
| MRPC Special Int. | 25 | 94 | WAR | 13 | 1.23 P 3 | | 0 | 009 | +0.52 | 009 | 009 | UTE | 47 460 | WAR |
| MRPC Special Int. | | | WAR | 17 | 1.67 P 3 | | 0 | 009 | -0.60 | 009 | 009 | UTE | 47 460 | WAR |
| MRPC Special Int. | 25 | 95 | WAR | 11 | 1.06 P 3 | | 0 | 008 | +0.56 | 008 | 008 | UTE | 47 460 | WAR |
| MRPC Special Int. | 26 | 54 | VOL | | 0.19 2 | | 55 | 010 | +16.72 | 010 | 010 | UTE | 17 460 | |
| MRPC Special Int. | 27 | 3 | VOL | | 0.54 2 | | 108 | 010 | +0.63 | 010 | 010 | UTE | 24 460 | |
| HL ROLL TRANSITION | | | MAI | | 0.70 2 | | 50 | UTE | -0.38 | UTE | UTE | UTE | 8 460 | |

ATTACHMENT A-3 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | *TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|----------|-----|-----|----------|---------|---------|-----|-------|-------|----------|
| MRPC Special Int. | 27 | 6 | VOL | | 0.25 2 | 118 | 010 | +0.55 | 010 | 010 | UTE | 24 | 460 | |
| MRPC Special Int. | 27 | 92 | VOL | | 0.22 2 | 59 | 010 | +10.88 | 010 | 010 | UTE | 47 | 460 | |
| MRPC Special Int. | 27 | 98 | VOL | | 0.29 2 | 58 | 015 | -1.76 | 015 | 015 | UTE | 47 | 460 | |
| MRPC Special Int. | | | VOL | | 0.35 2 | 103 | 011 | -0.76 | 011 | 011 | UTE | 47 | 460 | |
| MRPC Special Int. | 29 | 2 | VOL | | 0.65 2 | 128 | 010 | -0.25 | 010 | 010 | UTE | 24 | 460 | |
| MRPC Special Int. | 29 | 56 | VOL | | 0.19 2 | 79 | 014 | +1.04 | 014 | 014 | LTE | 48 | 520 | |
| MRPC Special Int. | 29 | 57 | VOL | | 0.26 2 | 73 | 014 | +1.07 | 014 | 014 | UTE | 17 | 460 | |
| MRPC Special Int. | 30 | 1 | VOL | | 0.51 2 | 149 | 015 | +1.22 | 015 | 015 | UTE | 24 | 460 | |
| MRPC Special Int. | 30 | 80 | VOL | | 0.19 2 | 0 | 014 | +1.03 | 014 | 014 | UTE | 17 | 460 | |
| MRPC Special Int. | 31 | 1 | VOL | | 0.27 2 | 150 | 007 | +0.41 | 007 | 007 | UTE | 24 | 460 | |
| MRPC Special Int. | 31 | 2 | VOL | | 0.32 2 | 130 | 012 | +0.77 | 012 | 012 | UTE | 24 | 460 | |
| MRPC Special Int. | 31 | 57 | VOL | | 0.11 2 | 0 | 011 | +24.13 | 012 | 011 | UTE | 17 | 460 | |
| MRPC Special Int. | 31 | 61 | VOL | | 0.19 2 | 0 | 011 | +2.90 | 011 | 011 | UTE | 17 | 460 | |
| MRPC Special Int. | 31 | 74 | VOL | | 0.15 2 | 64 | 009 | +25.03 | 009 | 009 | UTE | 17 | 460 | |
| MRPC Special Int. | | | VOL | | 0.23 2 | 0 | 006 | +17.18 | 006 | 006 | UTE | 17 | 460 | |
| MRPC Special Int. | 31 | 105 | VOL | | 0.13 2 | 58 | UTS | -8.87 | UTS | UTS | UTE | 47 | 460 | |
| MRPC Special Int. | 32 | 1 | VOL | | 0.25 2 | 44 | 015 | +18.27 | 015 | 015 | UTE | 24 | 460 | |
| MRPC Special Int. | 32 | 3 | WAR | 16 | 0.93 P 3 | 0 | 010 | +0.70 | 010 | 010 | UTE | 24 | 460 | WAR |
| MRPC Special Int. | 32 | 14 | VOL | | 0.17 2 | 58 | 008 | -18.20 | 008 | 008 | UTE | 24 | 460 | |
| MRPC Special Int. | 32 | 69 | VOL | | 0.07 2 | 0 | 007 | +31.56 | 008 | 007 | UTE | 17 | 460 | |
| MRPC Special Int. | | | VOL | | 0.10 2 | 0 | 007 | +25.09 | 008 | 007 | UTE | 17 | 460 | |
| MRPC Special Int. | 33 | 1 | VOL | | 0.30 2 | 132 | 012 | +0.66 | 012 | 012 | UTE | 24 | 460 | |
| MRPC Special Int. | 33 | 3 | VOL | | 0.34 2 | 53 | 010 | -0.45 | 010 | 010 | UTE | 24 | 460 | |
| MRPC Special Int. | | | VOL | | 0.43 2 | 42 | 010 | +0.65 | 010 | 010 | UTE | 24 | 460 | |
| MRPC Special Int. | 33 | 6 | VOL | | 0.39 2 | 143 | 010 | +0.56 | 010 | 010 | UTE | 24 | 460 | |
| MRPC Special Int. | 33 | 21 | VOL | | 0.23 2 | 74 | 014 | +0.96 | 014 | 014 | UTE | 24 | 460 | |
| MRPC Special Int. | 34 | 6 | VOL | | 0.09 2 | 54 | 009 | -1.50 | 009 | 009 | UTE | 24 | 460 | |
| MRPC Special Int. | 34 | 13 | VOL | | 0.27 2 | 159 | 008 | -0.81 | 008 | 008 | UTE | 24 | 460 | |
| MRPC Special Int. | 34 | 64 | VOL | | 0.24 2 | 0 | 004 | +9.96 | 004 | 004 | UTE | 17 | 460 | |
| MRPC Special Int. | 34 | 70 | SAI | | 0.13 2 | 71 | 012 | +3.94 | 012 | 012 | UTE | 17 | 460 | |
| MRPC Special Int. | 34 | 84 | VOL | | 0.12 2 | 0 | 004 | +14.69 | 004 | 004 | UTE | 17 | 460 | |
| MRPC Special Int. | 34 | 87 | VOL | | 0.29 2 | 102 | 015 | +0.14 | 015 | 015 | UTE | 52 | 460 | |
| MRPC Special Int. | 35 | 2 | VOL | | 0.38 2 | 74 | UTS | -11.05 | UTS | UTS | UTE | 24 | 460 | |
| MRPC Special Int. | 35 | 10 | VOL | | 0.08 2 | 75 | 014 | +0.98 | 014 | 014 | UTE | 24 | 460 | |
| MRPC Special Int. | 35 | 41 | WAR | 8 | 0.40 P 3 | 0 | 015 | +0.71 | 015 | 015 | UTE | 33 | 460 | WAR |
| MRPC Special Int. | 35 | 42 | VOL | | 0.21 2 | 101 | 014 | +0.42 | 014 | 014 | UTE | 33 | 460 | |
| MRPC Special Int. | 36 | 1 | VOL | | 0.16 2 | 120 | 010 | +5.09 | 010 | 010 | UTE | 24 | 460 | |
| MRPC Special Int. | 36 | 22 | VOL | | 0.24 2 | 122 | 015 | +0.55 | 015 | 015 | UTE | 24 | 460 | |
| MRPC Special Int. | 36 | 44 | VOL | | 0.24 2 | 134 | 015 | +0.49 | 015 | 015 | UTE | 33 | 460 | |
| MRPC Special Int. | 36 | 96 | VOL | | 0.30 2 | 63 | 011 | -6.79 | 011 | 011 | UTE | 52 | 460 | |
| MRPC Special Int. | 36 | 108 | VOL | | 0.63 2 | 46 | 008 | -0.49 | 008 | 008 | UTE | 52 | 460 | |
| MRPC Special Int. | 36 | 113 | VOL | | 0.16 2 | 83 | UTS | -10.89 | UTS | UTS | UTE | 52 | 460 | |
| MRPC Special Int. | 37 | 4 | VOL | | 0.14 2 | 88 | 014 | +1.10 | 014 | 014 | UTE | 24 | 460 | |
| MRPC Special Int. | 38 | 4 | VOL | | 0.28 2 | 79 | 014 | +1.10 | 014 | 014 | LTE | 37 | 460 | |
| MRPC Special Int. | 38 | 66 | VOL | | 0.08 2 | 31 | LTS | +24.87 | LTS | LTS | UTE | 13 | 460 | |
| MRPC Special Int. | 38 | 115 | WAR | 10 | 0.53 P 3 | 0 | 007 | -0.77 | 007 | 007 | UTE | 10 | 460 | WAR |
| MRPC Special Int. | 39 | 114 | VOL | | 0.24 2 | 91 | 013 | +0.93 | 013 | 013 | UTE | 9 | 460 | |
| MRPC Special Int. | 39 | 115 | VOL | | 0.15 2 | 63 | 012 | +1.29 | 012 | 012 | UTE | 10 | 460 | |
| MRPC Special Int. | 40 | 76 | VOL | | 0.34 2 | 69 | 014 | +0.34 | 014 | 014 | UTE | 13 | 460 | |
| MRPC Special Int. | 41 | 113 | WAR | 6 | 0.19 P 3 | 9 | 009 | -0.71 | 009 | 009 | UTE | 10 | 460 | WAR |
| MRPC Special Int. | 43 | 1 | VOL | | 0.45 2 | 112 | 013 | -0.72 | 013 | 013 | LTE | 37 | 460 | |
| MRPC Special Int. | 43 | 7 | VOL | | 0.38 2 | 129 | 008 | +0.65 | 008 | 008 | LTE | 37 | 460 | |
| MRPC Special Int. | 43 | 66 | VOL | | 0.09 2 | 93 | UTS | +6.24 | UTS | UTS | UTE | 13 | 460 | |
| MRPC Special Int. | 43 | 73 | VOL | | 0.15 2 | 35 | 013 | +15.06 | 013 | 013 | UTE | 13 | 460 | |
| MRPC Special Int. | 43 | 83 | VOL | | 0.08 2 | 48 | 011 | +16.82 | 011 | 011 | UTE | 13 | 460 | |
| MRPC Special Int. | 43 | 116 | WAR | 23 | 0.90 P 3 | 0 | 009 | -0.43 | 009 | 009 | UTE | 10 | 460 | WAR |
| MRPC Special Int. | 44 | 4 | VOL | | 0.10 2 | 36 | 010 | +1.18 | 010 | 010 | LTE | 37 | 460 | |
| HL ROLL TRANSITION | 44 | 59 | SCI | | 0.64 P 1 | 9 | UTE | -0.20 | UTE | UTE | UTE | 46 | 460 | |
| HL ROLL TRANSITION | 44 | 60 | MCI | | 1.09 P 1 | 13 | UTE | -1.08 | UTE | UTS | UTE | 47 | 460 | |
| MRPC Special Int. | 45 | 32 | VOL | | 0.20 2 | 40 | 014 | -0.19 | 014 | 014 | UTE | 33 | 460 | |
| MRPC Special Int. | 45 | 59 | VOL | | 0.14 2 | 86 | 015 | +1.58 | 015 | 015 | UTE | 33 | 460 | |
| MRPC Special Int. | 45 | 64 | VOL | | 0.08 2 | 81 | 010 | -13.48 | 010 | 010 | UTE | 15 | 460 | |
| MRPC Special Int. | | | VOL | | 0.10 2 | 117 | 007 | +4.46 | 007 | 007 | UTE | 15 | 460 | |
| MRPC Special Int. | 45 | 71 | SAI | | 0.24 2 | 61 | 012 | +12.63 | 012 | 012 | UTE | 15 | 460 | |
| MRPC Special Int. | | | SAI | | 0.31 2 | 63 | 012 | +13.61 | 012 | 012 | UTE | 15 | 460 | |

ATTACHMENT A-3 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-------------------|-----|------|-----|-----|----------|-----|-----|----------|---------|---------|-----|-------|-------|----------|
| MRPC Special Int. | | | SAI | | 0.32 2 | 65 | 012 | +22.07 | 012 | 012 | UTE | 15 | 460 | |
| MRPC Special Int. | | | SAI | | 0.36 2 | 61 | 012 | +14.57 | 012 | 012 | UTE | 15 | 460 | |
| MRPC Special Int. | 45 | 72 | VOL | | 0.09 2 | 65 | 011 | +18.81 | 011 | 011 | UTE | 15 | 460 | |
| MRPC Special Int. | 45 | 73 | VOL | | 0.24 2 | 142 | 014 | +0.41 | 014 | 014 | UTE | 15 | 460 | |
| MRPC Special Int. | 45 | 117 | VOL | | 0.26 2 | 66 | 014 | +1.01 | 014 | 014 | UTE | 10 | 460 | |
| MRPC Special Int. | 46 | 39 | VOL | | 0.13 2 | 0 | 014 | +0.96 | 014 | 014 | UTE | 33 | 460 | |
| MRPC Special Int. | 46 | 59 | VOL | | 0.16 2 | 0 | 015 | +1.79 | 015 | 015 | UTE | 33 | 460 | |
| MRPC Special Int. | 46 | 77 | VOL | | 0.24 2 | 29 | 014 | +0.42 | 014 | 014 | UTE | 15 | 460 | |
| MRPC Special Int. | 47 | 57 | VOL | | 0.17 2 | 0 | UTS | -15.27 | UTS | UTS | UTE | 33 | 460 | |
| MRPC Special Int. | 47 | 104 | VOL | | 0.08 2 | 56 | 015 | +13.57 | 015 | 015 | UTE | 9 | 460 | |
| MRPC Special Int. | 47 | 117 | VOL | | 0.49 2 | 40 | 014 | +0.90 | 014 | 014 | UTE | 10 | 460 | |
| MRPC Special Int. | 48 | 31 | WAR | 5 | 0.17 P 4 | 0 | 015 | +0.44 | 015 | 015 | UTE | 33 | 460 | WAR |
| MRPC Special Int. | 48 | 51 | VOL | | 0.34 2 | 74 | 012 | +17.21 | 012 | 012 | UTE | 33 | 460 | |
| MRPC Special Int. | 48 | 69 | VOL | | 0.22 2 | 66 | 014 | +0.40 | 014 | 014 | UTE | 15 | 460 | |
| MRPC Special Int. | 48 | 77 | VOL | | 0.24 2 | 169 | 014 | +0.27 | 014 | 014 | UTE | 15 | 460 | |
| MRPC Special Int. | 48 | 80 | VOL | | 0.13 2 | 98 | 014 | +0.65 | 014 | 014 | UTE | 15 | 460 | |
| MRPC Special Int. | | | VOL | | 0.22 2 | 55 | 014 | +0.15 | 014 | 014 | UTE | 15 | 460 | |
| MRPC Special Int. | 48 | 81 | VOL | | 0.29 2 | 53 | 015 | +0.44 | 015 | 015 | UTE | 15 | 460 | |
| MRPC Special Int. | 49 | 123 | WAR | 11 | 0.39 P 3 | 0 | 011 | +0.71 | 011 | 011 | UTE | 10 | 460 | WAR |
| MRPC Special Int. | 50 | 81 | VOL | | 0.23 2 | 128 | 014 | +0.29 | 014 | 014 | UTE | 15 | 460 | |
| MRPC Special Int. | 50 | 95 | VOL | | 0.41 2 | 102 | 014 | +0.55 | 014 | 014 | UTE | 9 | 460 | |
| MRPC Special Int. | 51 | 12 | VOL | | 0.10 2 | 57 | 012 | +8.34 | 012 | 012 | LTE | 26 | 460 | |
| MRPC Special Int. | 51 | 65 | VOL | | 0.12 2 | 77 | 007 | +20.20 | 007 | 007 | UTE | 15 | 460 | |
| MRPC Special Int. | 51 | 123 | WAR | 7 | 0.39 P 3 | 0 | 009 | -0.66 | 009 | 009 | LTE | 48 | 520 | WAR |
| MRPC Special Int. | 52 | 2 | VOL | | 0.26 2 | 84 | 011 | +0.71 | 011 | 011 | LTE | 26 | 460 | |
| MRPC Special Int. | 52 | 71 | VOL | | 0.20 2 | 37 | 004 | -11.93 | 004 | 004 | UTE | 15 | 460 | |
| MRPC Special Int. | 52 | 72 | VOL | | 0.09 2 | 52 | 003 | -10.00 | 003 | 003 | UTE | 15 | 460 | |
| MRPC Special Int. | 52 | 83 | VOL | | 0.32 2 | 79 | 014 | +0.02 | 014 | 014 | UTE | 15 | 460 | |
| MRPC Special Int. | 52 | 84 | VOL | | 0.26 2 | 66 | 014 | +0.25 | 014 | 014 | UTE | 15 | 460 | |
| MRPC Special Int. | 52 | 119 | VOL | | 0.25 2 | 42 | 015 | +0.18 | 015 | 015 | UTE | 10 | 460 | |
| MRPC Special Int. | 53 | 1 | VOL | | 0.49 2 | 105 | 013 | -0.59 | 013 | 013 | LTE | 26 | 460 | |
| MRPC Special Int. | 53 | 3 | VOL | | 0.28 2 | 133 | 011 | +0.75 | 011 | 011 | LTE | 26 | 460 | |
| MRPC Special Int. | | | VOL | | 0.31 2 | 51 | 011 | -0.68 | 011 | 011 | LTE | 26 | 460 | |
| MRPC Special Int. | 53 | 35 | VOL | | 0.12 2 | 66 | 007 | +7.18 | 007 | 007 | UTE | 33 | 460 | |
| MRPC Special Int. | 53 | 53 | SAI | | 0.10 2 | 107 | UTS | -7.95 | UTS | UTS | UTE | 33 | 460 | |
| MRPC Special Int. | 53 | 122 | VOL | | 0.31 2 | 126 | 015 | +0.32 | 015 | 015 | UTE | 10 | 460 | |
| MRPC Special Int. | 54 | 2 | WAR | 23 | 1.06 P 3 | 144 | 013 | -0.70 | 013 | 013 | LTE | 26 | 460 | WAR |
| MRPC Special Int. | 54 | 3 | WAR | 8 | 0.26 P 3 | 0 | 011 | +0.74 | 011 | 011 | LTE | 23 | 460 | WAR |
| MRPC Special Int. | 54 | 5 | VOL | | 0.17 2 | 72 | UTS | -23.12 | UTS | UTS | LTE | 23 | 460 | |
| MRPC Special Int. | 54 | 45 | WAR | 4 | 0.13 P 4 | 0 | 015 | +0.70 | 015 | 015 | UTE | 33 | 460 | WAR |
| MRPC Special Int. | 54 | 80 | VOL | | 0.26 2 | 62 | 003 | +8.17 | 003 | 003 | UTE | 15 | 460 | |
| MRPC Special Int. | 54 | 121 | WAR | 16 | 0.52 P 3 | 53 | 009 | -0.51 | 009 | 009 | UTE | 10 | 460 | WAR |
| MRPC Special Int. | 54 | 124 | WAR | 14 | 0.47 P 3 | 79 | 009 | -0.73 | 009 | 009 | UTE | 10 | 460 | WAR |
| MRPC Special Int. | 55 | 1 | WAR | 8 | 0.25 P 3 | 0 | 012 | -0.74 | 012 | 012 | LTE | 23 | 460 | WAR |
| MRPC Special Int. | | | WAR | 20 | 0.78 P 3 | 0 | 013 | -0.67 | 013 | 013 | LTE | 23 | 460 | WAR |
| MRPC Special Int. | 55 | 11 | VOL | | 0.29 2 | 56 | 012 | -6.18 | 012 | 012 | LTE | 23 | 460 | |
| C/L Tubesheet | 55 | 72 | VOL | | 0.09 2 | 61 | LTS | -6.83 | LTS | LTS | LTE | 22 | 460 | |
| MRPC Special Int. | 55 | 121 | WAR | 17 | 0.64 P 3 | 120 | 008 | -0.74 | 008 | 008 | UTE | 10 | 460 | WAR |
| MRPC Special Int. | 55 | 123 | WAR | 14 | 0.46 P 3 | 91 | 009 | -0.73 | 009 | 009 | UTE | 10 | 460 | WAR |
| MRPC Special Int. | 55 | 124 | WAR | 17 | 0.64 P 3 | 0 | 009 | -0.70 | 009 | 009 | UTE | 10 | 460 | WAR |
| MRPC Special Int. | 56 | 4 | VOL | | 0.33 2 | 62 | 011 | -0.80 | 011 | 011 | LTE | 23 | 460 | |
| MRPC Special Int. | | | WAR | 14 | 0.53 P 3 | 0 | 011 | -0.75 | 011 | 011 | LTE | 23 | 460 | WAR |
| MRPC Special Int. | 56 | 15 | VOL | | 0.15 2 | 84 | 005 | +13.13 | 005 | 005 | LTE | 23 | 460 | |
| MRPC Special Int. | 56 | 50 | VOL | | 1.41 2 | 10 | 007 | +13.51 | 007 | 007 | UTE | 30 | 460 | |
| MRPC Special Int. | 56 | 124 | VOL | | 0.42 2 | 120 | 010 | +0.55 | 010 | 010 | UTE | 10 | 460 | |
| MRPC Special Int. | 57 | 2 | WAR | 12 | 0.30 P 3 | 0 | 013 | -0.75 | 013 | 013 | LTE | 73 | 520 | WAR |
| MRPC Special Int. | 57 | 3 | VOL | | 0.70 2 | 85 | 014 | +1.19 | 014 | 014 | LTE | 23 | 460 | |
| MRPC Special Int. | 57 | 4 | WAR | 17 | 0.58 P 3 | 0 | 012 | +0.80 | 012 | 012 | LTE | 23 | 460 | WAR |
| MRPC Special Int. | 57 | 12 | VOL | | 0.21 2 | 39 | 005 | -12.65 | 005 | 005 | LTE | 23 | 460 | |
| MRPC Special Int. | 57 | 32 | VOL | | 0.12 2 | 49 | 005 | -15.77 | 005 | 005 | LTE | 37 | 460 | |
| MRPC Special Int. | 57 | 34 | VOL | | 0.16 2 | 74 | 007 | -6.38 | 007 | 007 | UTE | 30 | 460 | |
| MRPC Special Int. | 57 | 79 | VOL | | 0.09 2 | 51 | 008 | +2.78 | 008 | 008 | UTE | 82 | 460 | |
| MRPC Special Int. | 57 | 102 | SAI | | 0.10 2 | 78 | 010 | +12.99 | 010 | 010 | UTE | 9 | 460 | |
| MRPC Special Int. | | | SAI | | 0.12 2 | 88 | 010 | +15.35 | 010 | 010 | UTE | 9 | 460 | |
| MRPC Special Int. | | | SAI | | 0.12 2 | 89 | 010 | +14.19 | 010 | 010 | UTE | 9 | 460 | |

ATTACHMENT A-3 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-------------------|-----|------|-----|-----|----------|-----|-----|----------------|---------|---------|-----|--------|-------|----------|
| MRPC Special Int. | | | SAI | | 0.19 2 | 66 | 011 | +11.41 | 011 | 011 | UTE | 9 460 | | |
| MRPC Special Int. | | | SAI | | 0.19 2 | 77 | 010 | +11.97 | 010 | 010 | UTE | 9 460 | | |
| MRPC Special Int. | | | SAI | | 0.20 2 | 63 | 011 | +13.59 | 011 | 011 | UTE | 9 460 | | |
| MRPC Special Int. | | | SAI | | 0.25 2 | 71 | 011 | +12.48 | 011 | 011 | UTE | 9 460 | | |
| MRPC Special Int. | | | SAI | | 0.26 2 | 76 | 011 | +21.27 | 011 | 011 | UTE | 9 460 | | |
| MRPC Special Int. | | | SAI | | 0.30 2 | 75 | 011 | +14.67 | 011 | 011 | UTE | 9 460 | | |
| MRPC Special Int. | 57 | 124 | WAR | 24 | 0.88 P 3 | 59 | 009 | -0.72 | 009 | 009 | UTE | 10 460 | | WAR |
| MRPC Special Int. | 58 | 1 | VOL | | 0.17 2 | 67 | 014 | +7.49 | 014 | 014 | LTE | 74 460 | | |
| MRPC Special Int. | 58 | 2 | WAR | 8 | 0.19 P 3 | 0 | 014 | -0.75 | 014 | 014 | LTE | 73 520 | | WAR |
| MRPC Special Int. | | | WAR | 12 | 0.31 P 3 | 0 | 012 | -0.60 | 012 | 012 | LTE | 73 520 | | WAR |
| MRPC Special Int. | | | WAR | 16 | 0.44 P 3 | 0 | 013 | -0.71 | 013 | 013 | LTE | 73 520 | | WAR |
| MRPC Special Int. | 58 | 3 | VOL | | 0.11 2 | 126 | 012 | +1.05 | 012 | 012 | LTE | 73 520 | | |
| MRPC Special Int. | | | WAR | 17 | 0.44 P 3 | 0 | 011 | -0.47 | 011 | 011 | LTE | 73 520 | | WAR |
| MRPC Special Int. | 58 | 4 | WAR | 11 | 0.54 P 3 | 0 | 011 | -0.69 | 011 | 011 | LTE | 23 460 | | WAR |
| MRPC Special Int. | 58 | 103 | VOL | | 0.13 2 | 78 | 007 | +16.59 | 007 | 007 | UTE | 9 460 | | |
| MRPC Special Int. | 58 | 109 | VOL | | 0.49 2 | 87 | 015 | +10.47 | 015 | 015 | UTE | 9 460 | | |
| MRPC Special Int. | 58 | 122 | WAR | 12 | 1.04 P 3 | 0 | 009 | -0.51 | 009 | 009 | UTE | 85 460 | | WAR |
| MRPC Special Int. | 58 | 126 | WAR | 9 | 0.33 P 3 | 0 | 011 | -0.55 | 011 | 011 | UTE | 11 460 | | WAR |
| MRPC Special Int. | 59 | 9 | VOL | | 0.18 2 | 29 | 013 | -19.39 | 013 | 013 | LTE | 23 460 | | |
| MRPC Special Int. | 59 | 40 | SAI | | 0.15 2 | 80 | 015 | +10.20 | 015 | 015 | UTE | 30 460 | | |
| MRPC Special Int. | | | SAI | | 0.21 2 | 70 | 015 | +4.46 | 015 | 015 | UTE | 30 460 | | |
| MRPC Special Int. | | | SAI | | 0.23 2 | 69 | 015 | +7.84 | 015 | 015 | UTE | 30 460 | | |
| MRPC Special Int. | | | SAI | | 0.25 2 | 77 | 015 | +6.92 | 015 | 015 | UTE | 30 460 | | |
| MRPC Special Int. | 59 | 117 | WAR | 12 | 0.42 P 3 | 0 | 009 | -0.63 | 009 | 009 | UTE | 11 460 | | WAR |
| MRPC Special Int. | 59 | 120 | WAR | 12 | 0.45 P 3 | 0 | 009 | -0.64 | 009 | 009 | UTE | 11 460 | | WAR |
| MRPC Special Int. | 60 | 1 | WAR | 8 | 0.39 P 3 | 0 | 012 | +0.80 | 012 | 012 | LTE | 89 460 | | WAR |
| MRPC Special Int. | 60 | 3 | VOL | | 0.58 2 | 82 | 011 | -0.72 | 011 | 011 | LTE | 73 520 | | |
| MRPC Special Int. | 60 | 125 | WAR | 13 | 0.72 P 3 | 0 | 009 | -0.75 | 009 | 009 | UTE | 11 460 | | WAR |
| MRPC Special Int. | 60 | 126 | WAR | 6 | 0.21 P 3 | 0 | 009 | -0.61 | 009 | 009 | UTE | 11 460 | | WAR |
| MRPC Special Int. | 61 | 1 | VOL | | 0.34 2 | 72 | 014 | +4.64 | 014 | 014 | LTE | 71 520 | | |
| MRPC Special Int. | | | VOL | | 0.51 2 | 70 | 012 | -0.09 | 012 | 012 | LTE | 71 520 | | |
| MRPC Special Int. | | | WAR | 9 | 0.45 P 3 | 101 | 009 | +0.66 | 009 | 009 | LTE | 71 520 | | WAR |
| MRPC Special Int. | | | WAR | 10 | 0.45 P 3 | 0 | 009 | +0.73 | 009 | 009 | LTE | 89 460 | | WAR |
| MRPC Special Int. | | | VOL | | 0.92 2 | 74 | 011 | -0.71 to +0.22 | 011 | 011 | LTE | 71 520 | | |
| MRPC Special Int. | 61 | 3 | WAR | 9 | 0.45 P 3 | 64 | 011 | -0.66 | 011 | 011 | LTE | 71 520 | | WAR |
| MRPC Special Int. | | | WAR | 11 | 0.55 P 3 | 85 | 013 | -0.85 | 013 | 013 | LTE | 71 520 | | WAR |
| MRPC Special Int. | 61 | 15 | VOL | | 0.17 2 | 232 | 011 | +15.78 | 011 | 011 | LTE | 23 460 | | |
| MRPC Special Int. | 61 | 32 | VOL | | 0.14 2 | 35 | 009 | +16.90 | 009 | 009 | LTE | 23 460 | | |
| MRPC Special Int. | 61 | 86 | VOL | | 0.19 2 | 85 | 015 | +0.88 | 015 | 015 | UTE | 15 460 | | |
| MRPC Special Int. | 61 | 98 | VOL | | 0.13 2 | 54 | 015 | +9.98 | 015 | 015 | UTE | 9 460 | | |
| MRPC Special Int. | 61 | 121 | VOL | | 0.22 2 | 83 | 014 | +1.27 | 014 | 014 | UTE | 11 460 | | |
| MRPC Special Int. | 62 | 126 | WAR | 16 | 0.59 P 3 | 0 | 009 | -0.51 | 009 | 009 | UTE | 11 460 | | WAR |
| MRPC Special Int. | 63 | 4 | VOL | | 0.25 2 | 128 | 012 | +0.71 | 012 | 012 | LTE | 71 520 | | |
| MRPC Special Int. | 63 | 61 | VOL | | 0.09 2 | 0 | 014 | +0.09 | 014 | 014 | UTE | 4 460 | | |
| MRPC Special Int. | 63 | 89 | VOL | | 0.11 2 | 58 | 012 | +10.17 | 012 | 012 | UTE | 15 460 | | |
| MRPC Special Int. | 64 | 2 | WAR | 10 | 0.54 P 3 | 85 | 011 | +0.54 | 011 | 011 | LTE | 71 520 | | WAR |
| MRPC Special Int. | 64 | 12 | VOL | | 0.15 2 | 69 | UTS | -0.36 | UTS | UTS | LTE | 23 460 | | |
| MRPC Special Int. | 64 | 48 | VOL | | 0.19 2 | 73 | 009 | -10.45 | 009 | 009 | UTE | 30 460 | | |
| MRPC Special Int. | 65 | 3 | WAR | 10 | 0.51 P 3 | 85 | 013 | -0.76 | 013 | 013 | LTE | 71 520 | | WAR |
| MRPC Special Int. | 65 | 18 | VOL | | 0.39 2 | 103 | 004 | -0.80 | 004 | 004 | LTE | 23 460 | | |
| MRPC Special Int. | 65 | 40 | VOL | | 0.12 2 | 89 | 007 | +16.43 | 007 | 007 | UTE | 30 460 | | |
| MRPC Special Int. | 65 | 70 | SAI | | 0.07 2 | 88 | 015 | +32.36 | 015 | 015 | UTE | 4 460 | | |
| MRPC Special Int. | | | SAI | | 0.07 2 | 90 | 015 | +33.98 | 015 | 015 | UTE | 4 460 | | |
| MRPC Special Int. | | | SAI | | 0.08 2 | 60 | 015 | +31.50 | 015 | 015 | UTE | 4 460 | | |
| MRPC Special Int. | 65 | 82 | VOL | | 0.13 2 | 44 | 011 | -14.04 | 011 | 011 | UTE | 15 460 | | |
| MRPC Special Int. | 65 | 125 | WAR | 13 | 0.46 P 3 | 0 | 008 | -0.59 | 008 | 008 | UTE | 11 460 | | WAR |
| MRPC Special Int. | 66 | 3 | VOL | | 0.28 2 | 52 | 011 | -0.69 | 011 | 011 | LTE | 89 460 | | |
| MRPC Special Int. | 66 | 37 | SAI | | 0.18 2 | 80 | 011 | -2.19 | 011 | 011 | UTE | 30 460 | | |
| MRPC Special Int. | 66 | 45 | WAR | 11 | 0.36 P 3 | 0 | 006 | +0.52 | 006 | 006 | UTE | 30 460 | | WAR |
| MRPC Special Int. | 66 | 73 | SAI | | 0.24 2 | 84 | 009 | -9.74 | 009 | 009 | UTE | 58 460 | | |
| MRPC Special Int. | 66 | 126 | WAR | 7 | 0.26 P 3 | 0 | 008 | +0.72 | 008 | 008 | UTE | 11 460 | | WAR |
| MRPC Special Int. | | | WAR | 11 | 0.41 P 3 | 0 | 008 | -0.74 | 008 | 008 | UTE | 11 460 | | WAR |
| MRPC Special Int. | 67 | 2 | VOL | | 0.27 2 | 102 | 011 | -0.68 | 011 | 011 | LTE | 71 520 | | |
| MRPC Special Int. | 67 | 7 | VOL | | 0.37 2 | 62 | 004 | -0.80 | 004 | 004 | LTE | 23 460 | | |
| MRPC Special Int. | 67 | 37 | WAR | 10 | 0.33 P 3 | 0 | 009 | +0.69 | 009 | 009 | UTE | 30 460 | | WAR |

ATTACHMENT A-3 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|-------|-----|-----|----------|----------------|---------|-----|-------|---------|----------|
| MRPC Special Int. | 67 | 68 | VOL | | 0.09 | 2 | 55 | 015 | +10.49 | 015 | 015 | UTE | 3 460 | |
| HL ROLL TRANSITION | 67 | 103 | MAI | | 2.02 | 2 | 26 | UTE | -0.32 | UTE | UTE | UTE | 104 460 | |
| MRPC Special Int. | 67 | 124 | WAR | 20 | 0.80 | P 3 | 0 | 007 | -0.43 | 007 | 007 | UTE | 11 460 | WAR |
| MRPC Special Int. | 68 | 2 | WAR | 5 | 0.27 | P 3 | 85 | 011 | +0.62 | 011 | 011 | LTE | 71 520 | WAR |
| MRPC Special Int. | | | WAR | 6 | 0.31 | P 3 | 80 | 011 | -0.62 | 011 | 011 | LTE | 71 520 | WAR |
| MRPC Special Int. | 68 | 5 | WAR | 7 | 0.35 | P 3 | 55 | 010 | +0.58 | 010 | 010 | LTE | 71 520 | WAR |
| MRPC Special Int. | 68 | 6 | VOL | | 0.29 | 2 | 117 | 010 | +0.55 | 010 | 010 | LTE | 71 520 | |
| MRPC Special Int. | 68 | 11 | WAR | 12 | 0.38 | P 3 | 0 | 010 | -0.73 | 010 | 010 | LTE | 23 460 | WAR |
| MRPC Special Int. | 68 | 13 | WAR | 14 | 0.74 | P 3 | 0 | 010 | -0.76 | 010 | 010 | LTE | 23 460 | WAR |
| MRPC Special Int. | 68 | 20 | VOL | | 0.72 | 2 | 120 | 008 | -0.69 | 008 | 008 | LTE | 23 460 | |
| MRPC Special Int. | 68 | 23 | WAR | 14 | 0.74 | P 3 | 0 | 010 | -0.74 | 010 | 010 | LTE | 23 460 | WAR |
| MRPC Special Int. | 68 | 65 | VOL | | 0.18 | 2 | 52 | 003 | -13.59 | 003 | 003 | UTE | 3 460 | |
| MRPC Special Int. | 68 | 66 | WAR | 10 | 0.72 | P 3 | 0 | 004 | +0.69 | 004 | 004 | UTE | 3 460 | WAR |
| MRPC Special Int. | 68 | 127 | WAR | 9 | 0.51 | P 3 | 0 | 008 | +0.68 | 008 | 008 | UTE | 11 460 | WAR |
| MRPC Special Int. | | | WAR | 16 | 0.63 | P 3 | 0 | 008 | +0.16 | 008 | 008 | UTE | 11 460 | WAR |
| MRPC Special Int. | 68 | 129 | WAR | 15 | 0.85 | P 3 | 0 | 007 | +0.64 | 007 | 007 | UTE | 11 460 | WAR |
| MRPC Special Int. | 68 | 130 | WAR | 14 | 0.52 | P 3 | 0 | 011 | -0.28 | 011 | 011 | UTE | 11 460 | WAR |
| MRPC Special Int. | 69 | 6 | VOL | | 0.41 | 2 | 85 | 011 | -2.78 to -0.86 | 011 | 011 | LTE | 71 520 | |
| MRPC Special Int. | 69 | 15 | VOL | | 0.22 | 2 | 86 | 015 | +1.66 | 015 | 015 | LTE | 23 460 | |
| MRPC Special Int. | 69 | 44 | WAR | 12 | 0.39 | P 3 | 0 | 006 | +0.69 | 006 | 006 | UTE | 30 460 | WAR |
| MRPC Special Int. | 69 | 46 | WAR | 10 | 0.32 | P 3 | 0 | 006 | +0.75 | 006 | 006 | UTE | 30 460 | WAR |
| MRPC Special Int. | 69 | 98 | SAI | | 0.20 | 2 | 58 | 012 | -13.83 | 012 | 012 | UTE | 17 460 | |
| MRPC Special Int. | | | SAI | | 0.21 | 2 | 68 | 012 | -12.41 | 012 | 012 | UTE | 17 460 | |
| MRPC Special Int. | | | SAI | | 0.22 | 2 | 69 | 012 | -12.82 | 012 | 012 | UTE | 17 460 | |
| MRPC Special Int. | | | SAI | | 0.25 | 2 | 65 | 012 | -11.79 | 012 | 012 | UTE | 17 460 | |
| MRPC Special Int. | 69 | 130 | SVI | | 0.50 | P 1 | 67 | 012 | +0.73 | 012 | 012 | UTE | 11 460 | |
| MRPC Special Int. | 69 | 132 | VOL | | 0.20 | 2 | 87 | 015 | +22.12 | 015 | 015 | UTE | 11 460 | |
| MRPC Special Int. | 70 | 3 | WAR | 8 | 0.34 | P 3 | 0 | 011 | +0.38 | 011 | 011 | LTE | 69 520 | WAR |
| MRPC Special Int. | | | WAR | 15 | 0.69 | P 3 | 0 | 011 | -0.33 | 011 | 011 | LTE | 69 520 | WAR |
| MRPC Special Int. | 70 | 7 | WAR | 20 | 0.97 | P 3 | 0 | 010 | +0.43 | 010 | 010 | LTE | 69 520 | WAR |
| MRPC Special Int. | 70 | 8 | WAR | 14 | 0.63 | P 3 | 0 | 011 | +0.82 | 011 | 011 | LTE | 69 520 | WAR |
| MRPC Special Int. | 70 | 9 | WAR | 13 | 0.55 | P 3 | 0 | 010 | +0.54 | 010 | 010 | LTE | 69 520 | WAR |
| MRPC Special Int. | 70 | 10 | VOL | | 0.34 | 2 | 44 | 013 | -0.66 | 013 | 013 | LTE | 23 460 | |
| MRPC Special Int. | | | VOL | | 0.43 | 2 | 124 | 009 | +0.67 | 009 | 009 | LTE | 23 460 | |
| MRPC Special Int. | 70 | 11 | VOL | | 0.13 | 2 | 98 | 012 | -3.06 | 012 | 012 | LTE | 20 460 | |
| MRPC Special Int. | | | VOL | | 0.23 | 2 | 99 | 012 | -1.41 | 012 | 012 | LTE | 20 460 | |
| MRPC Special Int. | 70 | 12 | WAR | 16 | 0.61 | P 3 | 0 | 013 | -0.68 | 013 | 013 | LTE | 20 460 | WAR |
| MRPC Special Int. | 70 | 13 | VOL | | 0.44 | 2 | 71 | 011 | +0.64 | 011 | 011 | LTE | 20 460 | |
| MRPC Special Int. | 70 | 22 | VOL | | 0.68 | 2 | 99 | 011 | +0.52 | 011 | 011 | LTE | 20 460 | |
| MRPC Special Int. | 70 | 24 | VOL | | 0.39 | 2 | 146 | 003 | -0.62 | 003 | 003 | LTE | 20 460 | |
| MRPC Special Int. | 70 | 43 | WAR | 15 | 0.53 | P 3 | 0 | 009 | -0.65 | 009 | 009 | UTE | 30 460 | WAR |
| MRPC Special Int. | 70 | 45 | WAR | 16 | 0.56 | P 3 | 0 | 009 | -0.67 | 009 | 009 | UTE | 30 460 | WAR |
| MRPC Special Int. | 70 | 46 | WAR | 8 | 0.53 | P 3 | 0 | 009 | -0.66 | 009 | 009 | UTE | 30 460 | WAR |
| MRPC Special Int. | | | WAR | 13 | 0.42 | P 3 | 0 | 008 | -0.69 | 008 | 008 | UTE | 30 460 | WAR |
| MRPC Special Int. | | | WAR | 14 | 0.98 | P 3 | 0 | 009 | +0.66 | 009 | 009 | UTE | 30 460 | WAR |
| MRPC Special Int. | 70 | 53 | WAR | 10 | 0.84 | P 3 | 0 | 005 | +0.66 | 005 | 005 | UTE | 3 460 | WAR |
| MRPC Special Int. | 70 | 55 | SAI | | 0.20 | 2 | 77 | 013 | +9.67 | 013 | 013 | UTE | 3 460 | |
| MRPC Special Int. | | | SAI | | 0.23 | 2 | 76 | 013 | +8.47 | 013 | 013 | UTE | 3 460 | |
| MRPC Special Int. | 70 | 66 | WAR | 12 | 0.87 | P 3 | 0 | 005 | +0.69 | 005 | 005 | UTE | 3 460 | WAR |
| MRPC Special Int. | 70 | 74 | SAI | | 0.32 | 2 | 80 | 008 | -2.13 | 008 | 008 | UTE | 3 460 | |
| MRPC Special Int. | 70 | 90 | VOL | | 0.06 | 2 | 84 | 001 | -21.22 | 001 | 001 | UTE | 82 460 | |
| MRPC Special Int. | 70 | 124 | VOL | | 0.16 | 2 | 64 | 002 | +9.62 | 003 | 002 | UTE | 11 460 | |
| MRPC Special Int. | | | VOL | | 0.24 | 2 | 68 | 002 | +34.03 | 003 | 002 | UTE | 11 460 | |
| MRPC Special Int. | 70 | 128 | WAR | 18 | 0.73 | P 3 | 0 | 008 | -0.58 | 008 | 008 | UTE | 11 460 | WAR |
| MRPC Special Int. | 71 | 3 | VOL | | 0.27 | 2 | 140 | 013 | -0.50 | 013 | 013 | LTE | 69 520 | |
| MRPC Special Int. | 71 | 9 | WAR | 11 | 0.47 | P 3 | 0 | 011 | +0.36 | 011 | 011 | LTE | 69 520 | WAR |
| MRPC Special Int. | | | WAR | 13 | 0.60 | P 3 | 0 | 011 | +0.78 | 011 | 011 | LTE | 69 520 | WAR |
| MRPC Special Int. | 71 | 12 | VOL | | 0.27 | 2 | 73 | 014 | -0.72 | 014 | 014 | LTE | 20 460 | |
| MRPC Special Int. | 71 | 13 | VOL | | 0.38 | 2 | 127 | 014 | -0.74 | 014 | 014 | LTE | 20 460 | |
| MRPC Special Int. | | | VOL | | 0.51 | 2 | 107 | 010 | +0.44 | 010 | 010 | LTE | 20 460 | |
| MRPC Lane & Wedge | 71 | 14 | WAR | 13 | 1.00 | P 3 | 0 | 015 | +0.81 | 015 | 015 | UTE | 6 460 | WAR |
| MRPC Special Int. | | | WAR | 11 | 0.46 | P 3 | 0 | 015 | -0.72 | 015 | 015 | LTE | 20 460 | WAR |
| MRPC Special Int. | 71 | 15 | WAR | 10 | 0.44 | P 3 | 0 | 014 | -0.63 | 014 | 014 | LTE | 20 460 | WAR |
| MRPC Special Int. | 71 | 17 | VOL | | 0.35 | 2 | 51 | 015 | -0.74 | 015 | 015 | LTE | 20 460 | |
| MRPC Lane & Wedge | | | WAR | 15 | 1.14 | P 3 | 0 | 015 | -0.68 | 015 | 015 | UTE | 6 460 | WAR |

ATTACHMENT A-3 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|-------|-----|-----|----------|---------|---------|-----|-------|---------|----------|
| MRPC Special Int. | 71 | 18 | VOL | | 0.32 | 2 | 119 | 008 | +0.68 | 008 | 008 | LTE | 20 460 | |
| MRPC Special Int. | 71 | 21 | VOL | | 0.10 | 2 | 109 | 012 | +2.46 | 012 | 012 | LTE | 20 460 | |
| MRPC Special Int. | 71 | 23 | VOL | | 0.32 | 2 | 98 | 011 | +0.61 | 011 | 011 | LTE | 20 460 | |
| MRPC Special Int. | 71 | 28 | VOL | | 0.32 | 2 | 106 | 013 | +0.73 | 013 | 013 | LTE | 20 460 | |
| MRPC Special Int. | | | VOL | | 0.55 | 2 | 111 | 012 | +0.53 | 012 | 012 | LTE | 20 460 | |
| MRPC Special Int. | 71 | 29 | VOL | | 0.46 | 2 | 123 | 013 | +0.69 | 013 | 013 | LTE | 20 460 | |
| MRPC Special Int. | 71 | 30 | VOL | | 0.42 | 2 | 126 | 012 | +0.51 | 012 | 012 | LTE | 20 460 | |
| MRPC Special Int. | 71 | 33 | VOL | | 0.37 | 2 | 105 | 012 | +0.52 | 012 | 012 | LTE | 20 460 | |
| MRPC Special Int. | 71 | 36 | WAR | 7 | 0.24 | P 3 | 0 | 011 | +0.52 | 011 | 011 | UTE | 30 460 | WAR |
| MRPC Special Int. | 71 | 45 | WAR | 19 | 0.66 | P 3 | 0 | 008 | +0.64 | 008 | 008 | UTE | 30 460 | WAR |
| MRPC Special Int. | 71 | 46 | WAR | 10 | 0.32 | P 3 | 0 | 008 | -0.69 | 008 | 008 | UTE | 30 460 | WAR |
| MRPC Special Int. | | | WAR | 12 | 0.41 | P 3 | 0 | 006 | +0.71 | 006 | 006 | UTE | 30 460 | WAR |
| MRPC Special Int. | | | WAR | 14 | 0.48 | P 3 | 0 | 007 | -0.72 | 007 | 007 | UTE | 30 460 | WAR |
| MRPC Special Int. | 71 | 48 | WAR | 10 | 0.32 | P 3 | 0 | 009 | -0.73 | 009 | 009 | UTE | 30 460 | WAR |
| MRPC Special Int. | 71 | 54 | WAR | 9 | 0.62 | P 3 | 0 | 005 | +0.68 | 005 | 005 | UTE | 3 460 | WAR |
| MRPC Special Int. | 71 | 60 | VOL | | 0.24 | 2 | 66 | 002 | -4.27 | 002 | 002 | UTE | 3 460 | |
| MRPC Special Int. | 71 | 71 | VOL | | 0.16 | 2 | 65 | 011 | -11.71 | 011 | 011 | UTE | 3 460 | |
| MRPC Special Int. | 71 | 101 | VOL | | 0.20 | 2 | 40 | 011 | -4.37 | 011 | 011 | UTE | 12 460 | |
| MRPC Special Int. | 72 | 13 | VOL | | 0.32 | 2 | 154 | 014 | +0.28 | 014 | 014 | LTE | 69 520 | |
| MRPC Special Int. | 72 | 25 | WAR | 17 | 0.85 | P 3 | 0 | 013 | +0.63 | 013 | 013 | LTE | 20 460 | WAR |
| MRPC Special Int. | 72 | 31 | VOL | | 0.37 | 2 | 114 | 012 | +0.26 | 012 | 012 | LTE | 20 460 | |
| MRPC Lane & Wedge | 72 | 34 | WAR | 7 | 0.55 | P 3 | 0 | 015 | -0.42 | 015 | 015 | UTE | 6 460 | WAR |
| MRPC Special Int. | | | WAR | 5 | 0.22 | P 3 | 0 | 015 | -0.42 | 015 | 015 | LTE | 20 460 | WAR |
| MRPC Lane & Wedge | 72 | 35 | WAR | 6 | 0.56 | P 3 | 0 | 015 | -0.59 | 015 | 015 | UTE | 5 460 | WAR |
| MRPC Special Int. | | | WAR | 6 | 0.21 | P 3 | 0 | 015 | -0.69 | 015 | 015 | UTE | 30 460 | WAR |
| MRPC Special Int. | 72 | 53 | WAR | 6 | 0.46 | P 3 | 0 | 007 | -0.71 | 007 | 007 | UTE | 3 460 | WAR |
| MRPC Special Int. | | | WAR | 10 | 0.68 | P 3 | 0 | 005 | -0.60 | 005 | 005 | UTE | 3 460 | WAR |
| MRPC Special Int. | 72 | 64 | WAR | 6 | 0.41 | P 3 | 0 | 003 | -0.49 | 003 | 003 | UTE | 3 460 | WAR |
| MRPC Special Int. | 72 | 72 | VOL | | 0.08 | 2 | 62 | 008 | -11.68 | 008 | 008 | UTE | 5 460 | |
| MRPC Special Int. | | | VOL | | 0.12 | 2 | 81 | 008 | +16.02 | 008 | 008 | UTE | 3 460 | |
| MRPC Special Int. | | | VOL | | 0.17 | 2 | 45 | 008 | +18.02 | 008 | 008 | UTE | 3 460 | |
| MRPC Special Int. | | | VOL | | 0.14 | 2 | 54 | 007 | +28.32 | 008 | 007 | UTE | 6 460 | IDOK |
| MRPC Special Int. | 72 | 98 | SAI | | 0.20 | 2 | 85 | 012 | +12.18 | 012 | 012 | UTE | 12 460 | |
| MRPC Special Int. | | | SAI | | 0.23 | 2 | 80 | 012 | +10.87 | 012 | 012 | UTE | 12 460 | |
| MRPC Special Int. | | | SAI | | 0.24 | 2 | 79 | 012 | +10.71 | 012 | 012 | UTE | 12 460 | |
| MRPC Special Int. | | | SAI | | 0.25 | 2 | 74 | 012 | +11.21 | 012 | 012 | UTE | 12 460 | |
| MRPC Special Int. | | | SAI | | 0.26 | 2 | 73 | 012 | +18.87 | 012 | 012 | UTE | 12 460 | |
| MRPC Special Int. | | | SAI | | 0.26 | 2 | 79 | 012 | +10.42 | 012 | 012 | UTE | 12 460 | |
| MRPC Special Int. | | | SAI | | 0.26 | 2 | 80 | 012 | +11.48 | 012 | 012 | UTE | 12 460 | |
| MRPC Special Int. | | | SAI | | 0.28 | 2 | 82 | 012 | +9.58 | 012 | 012 | UTE | 12 460 | |
| MRPC Special Int. | | | SAI | | 0.28 | 2 | 82 | 012 | +11.75 | 012 | 012 | UTE | 12 460 | |
| MRPC Special Int. | | | SAI | | 0.35 | 2 | 76 | 012 | +10.58 | 012 | 012 | UTE | 12 460 | |
| MRPC Special Int. | 72 | 127 | WAR | 10 | 0.40 | P 3 | 0 | 008 | -0.61 | 008 | 008 | UTE | 12 460 | WAR |
| MRPC Special Int. | 73 | 4 | WAR | 15 | 0.70 | P 3 | 0 | 013 | -0.40 | 013 | 013 | LTE | 69 520 | WAR |
| MRPC Special Int. | 73 | 5 | WAR | 18 | 0.87 | P 3 | 0 | 014 | -0.78 | 014 | 014 | LTE | 69 520 | WAR |
| SLEEVE ROLL +POINT | 73 | 8 | VOL | | 2.21 | P 1 | 75 | 015 | -0.13 | 015 | 015 | UTE | 7 400 | SLV |
| MRPC Special Int. | 73 | 16 | WAR | 11 | 0.48 | P 3 | 0 | 009 | +0.44 | 009 | 009 | LTE | 69 520 | WAR |
| MRPC Special Int. | 73 | 48 | WAR | 5 | 0.21 | P 3 | 0 | 009 | +0.48 | 009 | 009 | UTE | 30 460 | WAR |
| MRPC Special Int. | 73 | 98 | VOL | | 0.24 | 2 | 53 | 001 | -6.94 | 001 | 001 | UTE | 9 460 | |
| MRPC Special Int. | 73 | 102 | VOL | | 0.29 | 2 | 51 | 013 | +20.59 | 013 | 013 | UTE | 13 460 | |
| HL ROLL TRANSITION | 73 | 123 | SAI | | 3.38 | 2 | 27 | UTE | -0.12 | UTE | UTE | UTE | 107 460 | |
| SLEEVE ROLL +POINT | 74 | 15 | SAI | | 3.58 | P 1 | 21 | 015 | -6.09 | 015 | 015 | UTE | 5 400 | SLV |
| MRPC Special Int. | 74 | 19 | VOL | | 0.25 | 2 | 151 | 009 | -0.30 | 009 | 009 | LTE | 69 520 | |
| MRPC Special Int. | 74 | 48 | VOL | | 0.22 | 2 | 0 | 001 | +16.97 | 001 | 001 | UTE | 30 460 | |
| MRPC Special Int. | 74 | 56 | SAI | | 0.13 | 2 | 79 | UTS | -15.77 | UTS | UTS | UTE | 3 460 | |
| MRPC Special Int. | | | SAI | | 0.14 | 2 | 79 | UTS | -16.99 | UTS | UTS | UTE | 3 460 | |
| MRPC Special Int. | | | SAI | | 0.15 | 2 | 79 | UTS | -18.04 | UTS | UTS | UTE | 3 460 | |
| MRPC Special Int. | 74 | 93 | SAI | | 0.22 | 2 | 81 | 009 | +10.75 | 009 | 009 | UTE | 9 460 | |
| MRPC Special Int. | | | SAI | | 0.27 | 2 | 85 | 009 | +17.56 | 009 | 009 | UTE | 9 460 | |
| MRPC Special Int. | | | SAI | | 0.33 | 2 | 92 | 009 | +19.57 | 009 | 009 | UTE | 9 460 | |
| MRPC Special Int. | | | SAI | | 0.34 | 2 | 84 | 009 | +22.93 | 009 | 009 | UTE | 9 460 | |
| MRPC Special Int. | 74 | 112 | VOL | | 0.14 | 2 | 46 | 012 | -8.27 | 012 | 012 | UTE | 13 460 | |
| MRPC Special Int. | 74 | 121 | VOL | | 0.06 | 2 | 81 | 002 | -12.35 | 002 | 002 | UTE | 13 460 | |
| MRPC Special Int. | 74 | 125 | WAR | 11 | 0.72 | P 3 | 0 | 010 | +0.15 | 010 | 010 | UTE | 13 460 | WAR |
| MRPC Special Int. | 75 | 112 | VOL | | 0.14 | 2 | 52 | 010 | +2.15 | 010 | 010 | UTE | 13 460 | |

ATTACHMENT A-3 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|----------|-----|-----|----------|------------------|---------|-----|-------|---------|----------|
| MRPC Special Int. | 75 | 119 | VOL | | 0.16 2 | | 73 | 014 | +0.92 | 014 | 014 | UTE | 13 460 | |
| MRPC Special Int. | | | VOL | | 0.20 2 | | 90 | 014 | +1.00 | 014 | 014 | UTE | 13 460 | |
| MRPC Special Int. | 75 | 123 | VOL | | 0.37 2 | | 74 | 009 | -0.76 | 009 | 009 | UTE | 13 460 | |
| MRPC Special Int. | 75 | 126 | VOL | | 0.20 2 | | 70 | 013 | +0.99 | 013 | 013 | UTE | 13 460 | |
| MRPC Special Int. | | | VOL | | 0.53 2 | | 65 | 015 | +22.19 | 015 | 015 | UTE | 13 460 | |
| MRPC Special Int. | 76 | 87 | VOL | | 0.23 2 | | 0 | 001 | -6.44 | 001 | 001 | UTE | 17 460 | |
| HL ROLL TRANSITION | 76 | 98 | SAI | | 1.91 2 | | 32 | UTE | -0.22 | UTE | UTE | UTE | 107 460 | |
| MRPC Special Int. | 76 | 114 | SAI | | 0.81 2 | | 32 | LTS | -0.02 | LTS | LTS | UTE | 13 460 | |
| MRPC Special Int. | 76 | 123 | VOL | | 0.45 2 | | 89 | 010 | +0.42 | 010 | 010 | UTE | 13 460 | |
| MRPC Special Int. | 77 | 7 | VOL | | 0.09 2 | | 74 | LTS | +25.80 to +26.70 | LTS | LTS | LTE | 72 460 | |
| MRPC Special Int. | 77 | 69 | SAI | | 0.12 2 | | 75 | 011 | -3.86 | 011 | 011 | UTE | 2 460 | |
| MRPC Special Int. | 77 | 115 | VOL | | 0.14 2 | | 113 | 014 | +1.31 | 014 | 014 | LTE | 50 460 | |
| MRPC Special Int. | 77 | 117 | SAI | | 0.11 2 | | 98 | UTS | -15.20 | UTS | UTS | LTE | 50 460 | |
| MRPC Special Int. | 77 | 119 | VOL | | 0.24 2 | | 81 | 014 | +1.01 | 014 | 014 | LTE | 50 460 | |
| MRPC Special Int. | 77 | 125 | WAR | 16 | 0.93 P 3 | | 0 | 009 | +0.01 | 009 | 009 | LTE | 50 460 | WAR |
| MRPC Special Int. | 78 | 101 | VOL | | 0.52 2 | | 82 | 014 | +1.37 | 014 | 014 | LTE | 50 460 | |
| MRPC Special Int. | 78 | 116 | VOL | | 0.11 2 | | 93 | 014 | +1.46 | 014 | 014 | LTE | 50 460 | |
| HL ROLL TRANSITION | 78 | 119 | SAI | | 0.61 2 | | 22 | UTE | -1.15 | UTE | UTE | UTE | 128 460 | |
| MRPC Special Int. | 78 | 120 | VOL | | 0.21 2 | | 86 | 014 | +0.96 | 014 | 014 | LTE | 50 460 | |
| MRPC Special Int. | 78 | 121 | WAR | 7 | 0.11 P 3 | | 139 | 014 | +0.79 | 014 | 014 | LTE | 50 460 | WAR |
| MRPC Special Int. | 78 | 125 | WAR | 7 | 0.24 P 3 | | 0 | 008 | -0.51 | 008 | 008 | LTE | 50 460 | WAR |
| MRPC Special Int. | 78 | 126 | SVI | | 0.17 2 | | 84 | 014 | +1.42 | 014 | 014 | LTE | 50 460 | |
| MRPC Special Int. | | | SVI | | 0.24 2 | | 92 | 014 | +1.21 | 014 | 014 | LTE | 50 460 | |
| MRPC Special Int. | | | WAR | 8 | 0.68 P 3 | | 0 | 008 | -0.55 | 008 | 008 | UTE | 84 520 | WAR |
| MRPC Special Int. | 79 | 4 | VOL | | 0.32 2 | | 78 | 014 | -0.74 | 014 | 014 | LTE | 72 460 | |
| MRPC Special Int. | | | VOL | | 0.48 2 | | 103 | 014 | +0.68 | 014 | 014 | LTE | 72 460 | |
| MRPC Special Int. | | | WAR | 7 | 0.33 P 3 | | 0 | 012 | -0.70 | 012 | 012 | LTE | 89 460 | WAR |
| SLEEVE ROLL +POINT | | | VOL | | 0.93 P 1 | | 105 | UTE | -0.69 | UTE | UTE | UTE | 4 400 | SLV |
| MRPC Special Int. | 79 | 6 | VOL | | 0.55 2 | | 78 | 013 | -0.77 | 013 | 013 | LTE | 72 460 | |
| MRPC Special Int. | | | VOL | | 0.52 2 | | 75 | 012 | -0.55 | 012 | 012 | LTE | 72 460 | |
| MRPC Special Int. | | | WAR | 22 | 0.86 P 3 | | 85 | 014 | -0.71 | 014 | 014 | LTE | 72 460 | WAR |
| MRPC Special Int. | 79 | 49 | WAR | 8 | 0.44 P 3 | | 0 | 009 | -0.61 | 009 | 009 | UTE | 36 460 | WAR |
| MRPC Special Int. | | | WAR | 14 | 0.47 P 3 | | 0 | 009 | -0.63 | 009 | 009 | LTE | 78 460 | WAR |
| MRPC Special Int. | 79 | 114 | VOL | | 0.14 2 | | 61 | 001 | -13.63 | 001 | 001 | LTE | 50 460 | |
| MRPC Special Int. | 79 | 117 | VOL | | 0.34 2 | | 66 | 007 | -11.80 | 007 | 007 | LTE | 50 460 | |
| MRPC Special Int. | 79 | 118 | VOL | | 0.31 2 | | 29 | 015 | +0.39 | 015 | 015 | LTE | 50 460 | |
| MRPC Special Int. | 79 | 127 | VOL | | 0.58 2 | | 100 | 014 | +0.78 | 014 | 014 | LTE | 50 460 | |
| MRPC Special Int. | 80 | 5 | WAR | 19 | 0.68 P 3 | | 107 | 012 | -0.81 | 012 | 012 | LTE | 72 460 | WAR |
| MRPC Special Int. | 80 | 8 | VOL | | 0.22 2 | | 103 | 004 | -0.76 | 004 | 004 | LTE | 72 460 | |
| MRPC Special Int. | 80 | 10 | VOL | | 0.25 2 | | 87 | 014 | -0.83 | 014 | 014 | LTE | 70 460 | |
| MRPC Special Int. | | | WAR | 13 | 0.49 P 3 | | 0 | 014 | -0.65 | 014 | 014 | LTE | 70 460 | WAR |
| MRPC Special Int. | 80 | 12 | WAR | 17 | 0.72 P 3 | | 0 | 014 | -0.55 | 014 | 014 | LTE | 70 460 | WAR |
| MRPC Special Int. | 80 | 13 | VOL | | 0.22 2 | | 89 | 012 | +0.43 | 012 | 012 | LTE | 89 460 | |
| MRPC Special Int. | | | WAR | 23 | 1.38 P 3 | | 0 | 014 | -0.45 | 014 | 014 | LTE | 89 460 | WAR |
| MRPC Special Int. | 80 | 18 | WAR | 10 | 0.38 P 3 | | 0 | 014 | +0.51 | 014 | 014 | LTE | 70 460 | WAR |
| MRPC Special Int. | 80 | 26 | VOL | | 0.34 2 | | 85 | 015 | +18.26 | 015 | 015 | UTE | 36 460 | |
| MRPC Special Int. | 80 | 29 | VOL | | 0.39 2 | | 85 | 015 | +16.72 | 015 | 015 | UTE | 36 460 | |
| MRPC Special Int. | | | WAR | 6 | 0.32 P 3 | | 0 | 015 | +0.65 | 015 | 015 | UTE | 36 460 | WAR |
| MRPC Lane & Wedge | 80 | 30 | VOL | | 0.30 2 | | 0 | 015 | +0.58 | 015 | 015 | UTE | 5 460 | |
| MRPC Special Int. | | | WAR | 4 | 0.27 P 3 | | 0 | 015 | +0.62 | 015 | 015 | UTE | 36 460 | WAR |
| MRPC Special Int. | | | WAR | 7 | 0.40 P 3 | | 0 | 010 | -0.54 | 010 | 010 | UTE | 36 460 | WAR |
| MRPC Special Int. | 80 | 35 | WAR | 2 | 0.14 P 3 | | 0 | 014 | -0.79 | 014 | 014 | UTE | 36 460 | WAR |
| MRPC Special Int. | | | WAR | 10 | 0.26 P 3 | | 0 | 014 | -0.73 | 014 | 014 | LTE | 78 460 | WAR |
| MRPC Special Int. | 80 | 37 | WAR | 7 | 0.37 P 3 | | 0 | 014 | -0.72 | 014 | 014 | UTE | 36 460 | WAR |
| MRPC Special Int. | | | WAR | 11 | 0.36 P 3 | | 0 | 014 | +0.64 | 014 | 014 | LTE | 78 460 | WAR |
| MRPC Special Int. | | | WAR | 15 | 0.49 P 3 | | 0 | 014 | -0.48 | 014 | 014 | LTE | 78 460 | WAR |
| MRPC Special Int. | 80 | 39 | VOL | | 0.25 2 | | 122 | 015 | +14.88 | 015 | 015 | UTE | 36 460 | |
| MRPC Special Int. | | | VOL | | 0.37 2 | | 112 | 015 | +14.14 | 015 | 015 | LTE | 78 460 | |
| MRPC Special Int. | 80 | 42 | WAR | 18 | 0.60 P 3 | | 0 | 014 | -0.72 | 014 | 014 | LTE | 78 460 | WAR |
| MRPC Special Int. | 80 | 45 | WAR | 6 | 0.33 P 3 | | 0 | 010 | +0.78 | 010 | 010 | UTE | 36 460 | WAR |
| MRPC Special Int. | 80 | 48 | WAR | 3 | 0.14 P 3 | | 0 | 009 | -0.61 | 009 | 009 | UTE | 36 460 | WAR |
| MRPC Special Int. | | | WAR | 13 | 0.41 P 3 | | 0 | 009 | -0.63 | 009 | 009 | LTE | 78 460 | WAR |
| MRPC Special Int. | 80 | 49 | WAR | 5 | 0.26 P 3 | | 0 | 009 | -0.67 | 009 | 009 | UTE | 36 460 | WAR |
| MRPC Special Int. | | | WAR | 7 | 0.20 P 3 | | 0 | 009 | -0.63 | 009 | 009 | LTE | 78 460 | WAR |
| MRPC Special Int. | 80 | 50 | WAR | 6 | 0.47 P 3 | | 0 | 009 | -0.67 | 009 | 009 | UTE | 32 460 | WAR |

ATTACHMENT A-3 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|-------|-----|-----|----------|-----------------|---------|-----|-------|-------|----------|
| MRPC Special Int. | 80 | 95 | SAI | | 0.14 | 2 | 71 | 009 | -6.78 | 009 | 009 | UTE | 52 | 460 |
| MRPC Special Int. | | | SAI | | 0.19 | 2 | 67 | 009 | -4.10 | 009 | 009 | UTE | 52 | 460 |
| MRPC Special Int. | | | SAI | | 0.21 | 2 | 70 | 009 | -7.80 | 009 | 009 | UTE | 52 | 460 |
| MRPC Special Int. | 80 | 106 | SAI | | 0.10 | 2 | 70 | 015 | -1.92 | 015 | 015 | LTE | 50 | 460 |
| MRPC Special Int. | | | SAI | | 0.79 | 2 | 31 | 015 | -4.58 | 015 | 015 | LTE | 50 | 460 |
| MRPC Special Int. | | | VOL | | 0.23 | 2 | 62 | 010 | +17.95 | 010 | 010 | LTE | 50 | 460 |
| MRPC Special Int. | 80 | 130 | VOL | | 0.32 | 2 | 124 | 010 | +0.74 | 010 | 010 | LTE | 50 | 460 |
| MRPC Special Int. | 81 | 1 | SAI | | 1.01 | 2 | 39 | 014 | +5.31 | 014 | 014 | LTE | 89 | 460 |
| MRPC Special Int. | 81 | 4 | VOL | | 0.26 | 2 | 49 | 012 | -0.65 | 012 | 012 | LTE | 70 | 460 |
| MRPC Special Int. | | | WAR | 23 | 1.06 | P 3 | 0 | 013 | -0.74 | 013 | 013 | LTE | 70 | 460 WAR |
| MRPC Special Int. | 81 | 5 | VOL | | 0.25 | 2 | 98 | 011 | -1.76 | 011 | 011 | LTE | 70 | 460 |
| MRPC Special Int. | 81 | 6 | VOL | | 0.26 | 2 | 115 | 013 | -0.44 | 013 | 013 | LTE | 70 | 460 |
| MRPC Special Int. | | | WAR | 17 | 0.72 | P 3 | 0 | 013 | +0.73 | 013 | 013 | LTE | 70 | 460 WAR |
| MRPC Special Int. | | | WAR | 28 | 1.42 | P 3 | 0 | 012 | -0.60 | 012 | 012 | LTE | 70 | 460 WAR |
| MRPC Special Int. | 81 | 7 | WAR | 19 | 0.80 | P 3 | 0 | 012 | -0.60 | 012 | 012 | LTE | 70 | 460 WAR |
| MRPC Special Int. | 81 | 9 | WAR | 10 | 0.38 | P 3 | 0 | 014 | -0.71 | 014 | 014 | LTE | 70 | 460 WAR |
| MRPC Special Int. | | | WAR | 17 | 0.72 | P 3 | 0 | 013 | -0.85 | 013 | 013 | LTE | 70 | 460 WAR |
| MRPC Special Int. | 81 | 10 | WAR | 20 | 0.88 | P 3 | 0 | 013 | -0.86 | 013 | 013 | LTE | 70 | 460 WAR |
| MRPC Special Int. | 81 | 11 | WAR | 12 | 0.45 | P 3 | 0 | 013 | -0.72 | 013 | 013 | LTE | 70 | 460 WAR |
| MRPC Special Int. | 81 | 13 | WAR | 6 | 0.33 | P 3 | 0 | 013 | -0.65 | 013 | 013 | UTE | 36 | 460 WAR |
| MRPC Special Int. | 81 | 14 | VOL | | 0.28 | 2 | 61 | 013 | -0.62 | 013 | 013 | UTE | 36 | 460 |
| MRPC Special Int. | 81 | 30 | VOL | | 0.26 | 2 | 71 | 015 | +0.68 | 015 | 015 | UTE | 36 | 460 |
| MRPC Special Int. | 81 | 37 | WAR | 12 | 1.19 | P 3 | 66 | 014 | +0.79 | 014 | 014 | UTE | 27 | 460 WAR |
| MRPC Special Int. | 81 | 40 | WAR | 6 | 0.65 | P 3 | 109 | 010 | +0.52 | 010 | 010 | UTE | 27 | 460 WAR |
| MRPC Special Int. | 81 | 42 | WAR | 9 | 0.87 | P 3 | 81 | 009 | -0.77 | 009 | 009 | UTE | 27 | 460 WAR |
| MRPC Special Int. | 81 | 43 | SAI | | 0.19 | 2 | 83 | 014 | +22.12 | 014 | 014 | UTE | 27 | 460 |
| MRPC Special Int. | | | WAR | 14 | 1.35 | P 3 | 72 | 009 | -0.76 | 009 | 009 | UTE | 27 | 460 WAR |
| MRPC Special Int. | | | WAR | 23 | 2.33 | P 3 | 74 | 008 | +0.72 | 008 | 008 | UTE | 27 | 460 WAR |
| MRPC Special Int. | 81 | 45 | WAR | 8 | 0.59 | P 3 | 0 | 010 | +0.57 | 010 | 010 | UTE | 32 | 460 WAR |
| MRPC Special Int. | 81 | 46 | WAR | 4 | 0.31 | P 3 | 0 | 009 | +0.44 | 009 | 009 | UTE | 32 | 460 WAR |
| MRPC Special Int. | | | WAR | 7 | 0.53 | P 3 | 0 | 009 | -0.78 | 009 | 009 | UTE | 32 | 460 WAR |
| MRPC Special Int. | 81 | 47 | WAR | 8 | 0.62 | P 3 | 0 | 009 | -0.67 | 009 | 009 | UTE | 32 | 460 WAR |
| MRPC Special Int. | 81 | 48 | WAR | 10 | 0.71 | P 3 | 0 | 009 | -0.72 | 009 | 009 | UTE | 32 | 460 WAR |
| MRPC Special Int. | 81 | 54 | WAR | 11 | 0.80 | P 3 | 0 | 008 | -0.54 | 008 | 008 | UTE | 32 | 460 WAR |
| MRPC Special Int. | 81 | 55 | WAR | 7 | 0.48 | P 3 | 0 | 009 | -0.72 | 009 | 009 | UTE | 32 | 460 WAR |
| MRPC Special Int. | | | WAR | 7 | 0.50 | P 3 | 0 | 007 | -0.61 | 007 | 007 | UTE | 32 | 460 WAR |
| MRPC Special Int. | | | WAR | 7 | 0.51 | P 3 | 0 | 008 | -0.66 | 008 | 008 | UTE | 32 | 460 WAR |
| MRPC Special Int. | | | WAR | 9 | 0.67 | P 3 | 0 | 008 | +0.67 | 008 | 008 | UTE | 32 | 460 WAR |
| MRPC Special Int. | 81 | 56 | WAR | 5 | 0.36 | P 3 | 0 | 008 | -0.62 | 008 | 008 | UTE | 32 | 460 WAR |
| MRPC Special Int. | | | WAR | 6 | 0.44 | P 3 | 0 | 009 | -0.69 | 009 | 009 | UTE | 32 | 460 WAR |
| MRPC Special Int. | | | WAR | 6 | 0.46 | P 3 | 0 | 007 | +0.53 | 007 | 007 | UTE | 32 | 460 WAR |
| MRPC Special Int. | | | WAR | 6 | 0.48 | P 3 | 0 | 005 | +0.70 | 005 | 005 | UTE | 32 | 460 WAR |
| MRPC Special Int. | | | WAR | 7 | 0.52 | P 3 | 0 | 007 | -0.68 | 007 | 007 | UTE | 32 | 460 WAR |
| MRPC Special Int. | | | WAR | 7 | 0.53 | P 3 | 0 | 008 | +0.67 | 008 | 008 | UTE | 32 | 460 WAR |
| MRPC Special Int. | 81 | 57 | WAR | 7 | 0.60 | P 3 | 0 | 005 | +0.76 | 005 | 005 | UTE | 6 | 460 WAR |
| MRPC Special Int. | 81 | 59 | WAR | 12 | 0.93 | P 3 | 0 | 005 | +0.72 | 005 | 005 | UTE | 2 | 460 WAR |
| MRPC Special Int. | 81 | 93 | VOL | | 0.20 | 2 | 76 | 014 | +0.99 | 014 | 014 | UTE | 52 | 460 |
| MRPC Special Int. | 81 | 95 | SAI | | 0.14 | 2 | 73 | 010 | -15.50 | 010 | 010 | UTE | 52 | 460 |
| MRPC Special Int. | | | SAI | | 0.20 | 2 | 72 | 010 | -14.54 | 010 | 010 | UTE | 52 | 460 |
| MRPC Special Int. | 81 | 120 | WAR | 11 | 0.65 | P 3 | 69 | 014 | +0.73 | 014 | 014 | LTE | 50 | 460 WAR |
| MRPC Special Int. | 81 | 124 | MAI | | 0.11 | 2 | 93 | 015 | -12.73 to -9.50 | 015 | 015 | LTE | 50 | 460 |
| MRPC Special Int. | | | MAI | | 0.14 | 2 | 102 | 015 | -6.41 to -1.83 | 015 | 015 | LTE | 50 | 460 |
| MRPC Special Int. | | | MAI | | 0.16 | 2 | 90 | 015 | -9.46 to -6.64 | 015 | 015 | LTE | 50 | 460 |
| MRPC Special Int. | 81 | 130 | VOL | | 0.09 | 2 | 96 | 013 | +0.85 | 013 | 013 | UTE | 84 | 520 |
| MRPC Special Int. | | | VOL | | 0.13 | 2 | 93 | 013 | +1.15 | 013 | 013 | UTE | 84 | 520 |
| MRPC Special Int. | 81 | 131 | VOL | | 0.13 | 2 | 81 | 015 | +29.48 | 015 | 015 | UTE | 84 | 520 |
| MRPC Special Int. | 82 | 6 | VOL | | 0.26 | 2 | 99 | 011 | +1.21 | 011 | 011 | LTE | 70 | 460 |
| MRPC Special Int. | 82 | 9 | VOL | | 0.70 | 2 | 64 | 011 | +0.70 | 011 | 011 | LTE | 89 | 460 |
| MRPC Special Int. | | | WAR | 13 | 0.50 | P 3 | 0 | 013 | +0.79 | 013 | 013 | LTE | 70 | 460 WAR |
| HL ROLL TRANSITION | 82 | 17 | SAI | | 0.72 | 2 | 23 | UTE | -1.06 | UTE | UTE | UTE | 82 | 460 |
| MRPC Special Int. | 82 | 32 | WAR | 6 | 0.33 | P 3 | 0 | 010 | +0.58 | 010 | 010 | UTE | 36 | 460 WAR |
| MRPC Special Int. | 82 | 33 | WAR | 8 | 0.46 | P 3 | 0 | 010 | +0.44 | 010 | 010 | UTE | 36 | 460 WAR |
| MRPC Special Int. | 82 | 41 | VOL | | 0.14 | 2 | 122 | 010 | +0.63 | 010 | 010 | UTE | 27 | 460 |
| MRPC Special Int. | | | WAR | 8 | 0.76 | P 3 | 80 | 008 | -0.72 | 008 | 008 | UTE | 27 | 460 WAR |
| MRPC Special Int. | | | WAR | 8 | 0.83 | P 3 | 89 | 009 | -0.63 | 009 | 009 | UTE | 27 | 460 WAR |

ATTACHMENT A-3 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|-------|-----|-----|----------|----------------|---------|---------|-----|--------|-------|----------|
| MRPC Special Int. | | | WAR | 9 | 0.90 | P 3 | 58 | 008 | +0.64 | 008 | 008 | UTE | 27 460 | | WAR |
| MRPC Special Int. | 82 | 42 | WAR | 11 | 1.05 | P 3 | 88 | 009 | -0.65 | 009 | 009 | UTE | 27 460 | | WAR |
| MRPC Special Int. | 82 | 43 | WAR | 6 | 0.59 | P 3 | 63 | 010 | +0.60 | 010 | 010 | UTE | 27 460 | | WAR |
| MRPC Special Int. | | | WAR | 6 | 0.59 | P 3 | 107 | 007 | -0.72 | 007 | 007 | UTE | 27 460 | | WAR |
| MRPC Special Int. | | | WAR | 11 | 1.02 | P 3 | 98 | 009 | -0.69 | 009 | 009 | UTE | 27 460 | | WAR |
| MRPC Special Int. | 82 | 44 | VOL | | 0.28 | P 3 | 144 | 008 | +0.73 | 008 | 008 | UTE | 27 460 | | |
| MRPC Special Int. | | | VOL | | 0.48 | 2 | 129 | 008 | -0.71 | 008 | 008 | UTE | 27 460 | | |
| MRPC Special Int. | | | VOL | | 0.28 | P 1 | 141 | 010 | +0.67 | 010 | 010 | UTE | 27 460 | | |
| MRPC Special Int. | | | VOL | | 0.45 | P 1 | 106 | 009 | -0.77 | 009 | 009 | UTE | 27 460 | | |
| MRPC Special Int. | | | WAR | 9 | 0.58 | P 3 | 0 | 007 | -0.66 | 007 | 007 | UTE | 27 460 | | WAR |
| MRPC Special Int. | 82 | 46 | WAR | 8 | 0.57 | P 3 | 82 | 009 | -0.72 | 009 | 009 | UTE | 27 460 | | WAR |
| MRPC Special Int. | 82 | 125 | WAR | 14 | 0.23 | P 3 | 78 | 014 | +0.86 | 014 | 014 | LTE | 50 460 | | WAR |
| MRPC Special Int. | 83 | 3 | SAI | | 0.21 | 2 | 82 | 014 | +15.74 | 014 | 014 | LTE | 70 460 | | |
| MRPC Special Int. | | | VOL | | 0.32 | 2 | 128 | 010 | -0.42 | 010 | 010 | LTE | 89 460 | | |
| MRPC Special Int. | | | VOL | | 0.48 | 2 | 137 | 010 | +0.05 | 010 | 010 | LTE | 89 460 | | |
| MRPC Special Int. | | | WAR | 18 | 0.75 | P 3 | 0 | 014 | -0.77 | 014 | 014 | LTE | 70 460 | | WAR |
| MRPC Special Int. | 83 | 6 | VOL | | 0.35 | 2 | 281 | 011 | -4.14 to -0.98 | 011 | 011 | LTE | 70 460 | | |
| MRPC Special Int. | 83 | 7 | VOL | | 0.28 | 2 | 105 | 011 | -3.07 to -1.21 | 011 | 011 | LTE | 70 460 | | |
| MRPC Special Int. | 83 | 8 | WAR | 24 | 1.10 | P 3 | 0 | 010 | +0.35 | 010 | 010 | LTE | 70 460 | | WAR |
| MRPC Special Int. | | | WAR | 34 | 1.99 | P 3 | 0 | 010 | +0.06 | 010 | 010 | LTE | 70 460 | | WAR |
| MRPC Special Int. | 83 | 26 | WAR | 7 | 0.39 | P 3 | 0 | 010 | +0.33 | 010 | 010 | UTE | 36 460 | | WAR |
| MRPC Special Int. | 83 | 28 | WAR | 6 | 0.33 | P 3 | 0 | 010 | +0.49 | 010 | 010 | UTE | 36 460 | | WAR |
| MRPC Special Int. | 83 | 31 | WAR | 4 | 0.22 | P 3 | 0 | 009 | +0.59 | 009 | 009 | UTE | 36 460 | | WAR |
| MRPC Special Int. | 83 | 32 | WAR | 9 | 0.48 | P 3 | 0 | 010 | -0.70 | 010 | 010 | UTE | 36 460 | | WAR |
| MRPC Special Int. | 83 | 34 | WAR | 7 | 0.41 | P 3 | 0 | 010 | +0.49 | 010 | 010 | UTE | 36 460 | | WAR |
| MRPC Special Int. | 83 | 37 | VOL | | 0.37 | P 1 | 147 | 010 | +0.42 | 010 | 010 | UTE | 27 460 | | |
| MRPC Special Int. | 83 | 43 | VOL | | 0.38 | 2 | 141 | 009 | -0.65 | 009 | 009 | UTE | 27 460 | | |
| MRPC Special Int. | | | WAR | 9 | 0.58 | P 3 | 83 | 008 | -0.65 | 008 | 008 | UTE | 27 460 | | WAR |
| MRPC Special Int. | 83 | 45 | SAI | | 0.17 | 2 | 93 | UTS | -1.11 | UTS | UTS | UTE | 27 460 | | |
| MRPC Special Int. | | | VOL | | 0.36 | 2 | 95 | 009 | -0.74 | 009 | 009 | UTE | 27 460 | | |
| MRPC Special Int. | 83 | 104 | VOL | | 0.18 | 2 | 34 | 010 | +5.49 | 010 | 010 | LTE | 50 460 | | |
| MRPC Special Int. | 83 | 117 | VOL | | 0.17 | 2 | 63 | 011 | -15.04 | 011 | 011 | LTE | 50 460 | | |
| MRPC Special Int. | 83 | 132 | VOL | | 0.18 | 2 | 91 | 015 | +18.81 | 015 | 015 | LTE | 61 460 | | |
| MRPC Special Int. | | | VOL | | 0.19 | 2 | 88 | 015 | +27.70 | 015 | 015 | LTE | 61 460 | | |
| MRPC Special Int. | 84 | 1 | VOL | | 0.42 | 2 | 119 | 011 | -0.60 | 011 | 011 | LTE | 68 460 | | |
| MRPC Special Int. | 84 | 2 | VOL | | 0.28 | 2 | 29 | 010 | +0.26 | 010 | 010 | LTE | 68 460 | | |
| MRPC Special Int. | | | VOL | | 0.34 | 2 | 122 | 010 | -0.19 | 010 | 010 | LTE | 68 460 | | |
| MRPC Special Int. | 84 | 3 | VOL | | 0.41 | 2 | 144 | 010 | +0.54 | 010 | 010 | LTE | 68 460 | | |
| HL ROLL TRANSITION | 84 | 16 | VOL | | 0.29 | 2 | 96 | UTE | -3.42 | UTE | UTE | UTE | 82 460 | | |
| MRPC Special Int. | 84 | 19 | WAR | 5 | 0.29 | P 3 | 0 | 011 | +0.58 | 011 | 011 | UTE | 36 460 | | WAR |
| MRPC Special Int. | 84 | 26 | WAR | 6 | 0.36 | P 3 | 0 | 010 | +0.48 | 010 | 010 | UTE | 36 460 | | WAR |
| MRPC Special Int. | 84 | 28 | WAR | 8 | 0.45 | P 3 | 0 | 010 | +0.57 | 010 | 010 | UTE | 36 460 | | WAR |
| MRPC Special Int. | 84 | 29 | VOL | | 0.35 | 2 | 161 | 004 | -0.72 | 004 | 004 | UTE | 36 460 | | |
| MRPC Special Int. | 84 | 30 | VOL | | 0.31 | 2 | 75 | 015 | +0.85 | 015 | 015 | UTE | 36 460 | | |
| MRPC Special Int. | 84 | 55 | WAR | 10 | 1.56 | P 3 | 0 | 005 | +0.71 | 005 | 005 | UTE | 27 460 | | WAR |
| MRPC Special Int. | 84 | 118 | VOL | | 0.11 | 2 | 105 | 014 | +1.19 | 014 | 014 | LTE | 54 460 | | |
| MRPC Special Int. | | | VOL | | 0.20 | 2 | 95 | 014 | +1.19 | 014 | 014 | LTE | 54 460 | | |
| MRPC Special Int. | | | VOL | | 0.59 | 2 | 89 | 014 | +0.83 | 014 | 014 | LTE | 54 460 | | |
| MRPC Special Int. | | | VOL | | 0.55 | 2 | 80 | 014 | +0.83 | 014 | 014 | LTE | 54 460 | | IDOK |
| MRPC Special Int. | 84 | 121 | VOL | | 0.05 | 2 | 90 | 014 | +1.16 | 014 | 014 | UTE | 84 520 | | |
| MRPC Special Int. | 84 | 122 | VOL | | 0.23 | 2 | 78 | 014 | +0.78 | 014 | 014 | UTE | 84 520 | | |
| MRPC H/L Plugs | 85 | 2 | SAI | | 5.53 | 1 | 38 | UTE | -1.90 | UTE | UTE | UTE | 1 410 | | |
| MRPC Special Int. | 85 | 9 | WAR | 10 | 0.56 | P 3 | 0 | 009 | -0.72 | 009 | 009 | UTE | 36 460 | | WAR |
| MRPC Special Int. | 85 | 14 | WAR | 7 | 0.35 | P 3 | 0 | 010 | -0.58 | 010 | 010 | UTE | 36 460 | | WAR |
| MRPC Special Int. | 85 | 25 | VOL | | 0.25 | 2 | 119 | 010 | +0.59 | 010 | 010 | UTE | 36 460 | | |
| MRPC Special Int. | | | VOL | | 0.48 | 2 | 54 | 010 | +0.69 | 010 | 010 | UTE | 36 460 | | |
| MRPC Special Int. | 85 | 26 | WAR | 9 | 0.43 | P 3 | 0 | 010 | -0.70 | 010 | 010 | UTE | 36 460 | | WAR |
| MRPC Special Int. | | | WAR | 12 | 0.60 | P 3 | 0 | 010 | +0.58 | 010 | 010 | UTE | 36 460 | | WAR |
| MRPC Special Int. | 85 | 27 | WAR | 8 | 0.45 | P 3 | 0 | 010 | -0.68 | 010 | 010 | UTE | 36 460 | | WAR |
| MRPC Special Int. | 85 | 34 | WAR | 9 | 0.49 | P 3 | 0 | 009 | -0.72 | 009 | 009 | UTE | 36 460 | | WAR |
| MRPC Special Int. | 85 | 36 | WAR | 2 | 0.39 | P 3 | 0 | 009 | -0.66 | 009 | 009 | UTE | 27 460 | | WAR |
| MRPC Special Int. | 85 | 42 | WAR | 6 | 0.58 | P 3 | 106 | 008 | -0.70 | 008 | 008 | UTE | 27 460 | | WAR |
| MRPC Special Int. | | | WAR | 7 | 1.02 | P 3 | 0 | 009 | -0.77 | 009 | 009 | UTE | 27 460 | | WAR |
| MRPC Special Int. | | | WAR | 9 | 1.36 | P 3 | 0 | 009 | +0.69 | 009 | 009 | UTE | 27 460 | | WAR |
| MRPC Special Int. | 85 | 44 | WAR | 11 | 1.64 | P 3 | 0 | 008 | -0.70 | 008 | 008 | UTE | 27 460 | | WAR |

ATTACHMENT A-3 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|-------|-----|-----|----------|----------------|---------|-----|-------|-------|----------|
| MRPC Special Int. | 85 | 91 | VOL | | 0.13 | 2 | 59 | 012 | +18.46 | 012 | 012 | UTE | 52 | 460 |
| HL ROLL TRANSITION | 85 | 124 | SAI | | 1.35 | 2 | 25 | UTE | -0.26 | UTE | UTE | UTE | 129 | 460 |
| MRPC Special Int. | 85 | 126 | SVI | | 0.29 | 2 | 116 | UTS | -6.23 | UTS | UTS | LTE | 61 | 460 |
| MRPC Special Int. | 85 | 130 | VOL | | 0.47 | 2 | 151 | 009 | +0.07 | 009 | 009 | UTE | 84 | 520 |
| MRPC Special Int. | 86 | 1 | WAR | 14 | 0.61 | P 3 | 0 | 014 | +0.70 | 014 | 014 | LTE | 68 | 460 WAR |
| MRPC Special Int. | 86 | 11 | WAR | 14 | 0.67 | P 3 | 0 | 010 | -0.75 | 010 | 010 | UTE | 36 | 460 WAR |
| MRPC Special Int. | 86 | 28 | WAR | 13 | 0.65 | P 3 | 0 | 009 | -0.87 | 009 | 009 | UTE | 36 | 460 WAR |
| MRPC Special Int. | 86 | 30 | WAR | 6 | 0.32 | P 3 | 0 | 009 | -0.69 | 009 | 009 | UTE | 36 | 460 WAR |
| MRPC Special Int. | 86 | 32 | WAR | 10 | 0.46 | P 3 | 0 | 009 | -0.77 | 009 | 009 | UTE | 36 | 460 WAR |
| MRPC Special Int. | 86 | 34 | WAR | 12 | 0.57 | P 3 | 0 | 009 | -0.75 | 009 | 009 | UTE | 36 | 460 WAR |
| MRPC Special Int. | 86 | 55 | VOL | | 0.49 | 2 | 112 | 005 | -0.70 | 005 | 005 | UTE | 27 | 460 |
| MRPC Special Int. | 86 | 67 | WAR | 7 | 0.54 | P 3 | 0 | 004 | -0.63 | 004 | 004 | UTE | 2 | 460 WAR |
| MRPC Special Int. | 86 | 126 | VOL | | 0.65 | 2 | 79 | 014 | +0.87 | 014 | 014 | LTE | 54 | 460 |
| MRPC Special Int. | 87 | 9 | VOL | | 0.27 | 2 | 64 | 010 | -0.65 | 010 | 010 | UTE | 39 | 460 |
| MRPC Special Int. | 87 | 13 | VOL | | 0.32 | 2 | 148 | 010 | -0.37 | 010 | 010 | UTE | 39 | 460 |
| MRPC Special Int. | 87 | 50 | VOL | | 0.33 | 2 | 144 | 009 | -0.82 | 009 | 009 | UTE | 27 | 460 |
| HL ROLL TRANSITION | 87 | 70 | MAI | | 0.79 | 2 | 25 | UTE | -1.68 | UTE | UTE | UTE | 5 | 460 |
| MRPC Special Int. | 87 | 122 | VOL | | 0.28 | 2 | 83 | 002 | +0.70 | 002 | 002 | LTE | 54 | 460 |
| MRPC Special Int. | 87 | 123 | VOL | | 0.12 | 2 | 76 | 014 | +1.38 | 014 | 014 | LTE | 54 | 460 |
| HL ROLL TRANSITION | 87 | 127 | SAI | | 1.05 | 2 | 19 | UTE | -1.15 | UTE | UTE | UTE | 126 | 460 |
| MRPC Special Int. | 87 | 130 | VOL | | 0.20 | 2 | 116 | 012 | +14.73 | 012 | 012 | LTE | 54 | 460 |
| MRPC Special Int. | 88 | 2 | VOL | | 0.42 | 2 | 103 | 010 | +5.47 | 010 | 010 | LTE | 68 | 460 |
| MRPC Special Int. | 88 | 3 | WAR | 18 | 0.85 | P 3 | 0 | 012 | -0.75 | 012 | 012 | LTE | 68 | 460 WAR |
| MRPC Special Int. | | | WAR | 23 | 1.17 | P 3 | 0 | 011 | +0.67 | 011 | 011 | LTE | 68 | 460 WAR |
| MRPC Special Int. | 88 | 69 | VOL | | 0.64 | 2 | 7 | 014 | -3.56 | 014 | 014 | UTE | 2 | 460 |
| MRPC Special Int. | | | VOL | | 0.75 | 2 | 5 | 005 | -15.21 | 005 | 005 | UTE | 2 | 460 |
| MRPC Special Int. | 88 | 95 | VOL | | 0.12 | 2 | 57 | 014 | +17.38 | 014 | 014 | UTE | 52 | 460 |
| MRPC Special Int. | 88 | 119 | VOL | | 0.27 | 2 | 89 | 007 | -0.49 | 007 | 007 | LTE | 54 | 460 |
| MRPC Special Int. | 88 | 122 | VOL | | 0.32 | 2 | 112 | 015 | +0.73 | 015 | 015 | LTE | 54 | 460 |
| MRPC H/L Plugs | 89 | 1 | SAI | | 8.56 | 1 | 25 | UTE | -1.86 | UTE | UTE | UTE | 1 | 410 |
| MRPC Special Int. | 89 | 2 | WAR | 16 | 0.72 | P 3 | 0 | 011 | +0.49 | 011 | 011 | LTE | 68 | 460 WAR |
| MRPC Special Int. | 89 | 17 | WAR | 6 | 0.59 | P 3 | 0 | 009 | -0.75 | 009 | 009 | UTE | 39 | 460 WAR |
| MRPC Special Int. | 90 | 19 | VOL | | 0.06 | 2 | 63 | 012 | -4.50 | 012 | 012 | UTE | 39 | 460 |
| MRPC Special Int. | 90 | 43 | VOL | | 0.46 | 2 | 97 | 015 | +0.84 | 015 | 015 | UTE | 27 | 460 |
| MRPC Special Int. | 90 | 57 | VOL | | 0.14 | 2 | 40 | 011 | +26.81 | 011 | 011 | LTE | 45 | 460 |
| MRPC Special Int. | 90 | 115 | VOL | | 0.38 | 2 | 42 | 014 | +1.12 | 014 | 014 | LTE | 61 | 460 |
| MRPC Special Int. | 91 | 2 | WAR | 21 | 1.05 | P 3 | 0 | 011 | +0.56 | 011 | 011 | LTE | 68 | 460 WAR |
| MRPC Special Int. | 91 | 17 | VOL | | 0.72 | 2 | 65 | 015 | +0.96 | 015 | 015 | UTE | 39 | 460 |
| MRPC Special Int. | 91 | 86 | VOL | | 0.24 | 2 | 129 | 005 | +15.39 | 005 | 005 | LTE | 83 | 520 |
| MRPC Special Int. | 91 | 87 | SAI | | 0.24 | 2 | 74 | 010 | +4.59 | 010 | 010 | UTE | 52 | 460 |
| MRPC Special Int. | 91 | 90 | SAI | | 0.06 | 2 | 91 | 011 | -1.81 | 011 | 011 | UTE | 52 | 460 |
| MRPC Special Int. | | | SAI | | 0.08 | 2 | 95 | 011 | -5.25 | 011 | 011 | UTE | 52 | 460 |
| MRPC Special Int. | | | SAI | | 0.11 | 2 | 78 | 011 | -6.82 | 011 | 011 | UTE | 52 | 460 |
| MRPC Special Int. | | | SAI | | 0.11 | 2 | 80 | 011 | -12.20 | 011 | 011 | UTE | 52 | 460 |
| MRPC Special Int. | | | SAI | | 0.12 | 2 | 87 | 011 | -9.93 | 011 | 011 | UTE | 52 | 460 |
| MRPC Special Int. | | | SAI | | 0.16 | 2 | 76 | 012 | +4.79 | 012 | 012 | UTE | 52 | 460 |
| MRPC Special Int. | 91 | 92 | SAI | | 0.13 | 2 | 72 | 011 | -19.04 | 011 | 011 | UTE | 52 | 460 |
| MRPC Special Int. | | | SAI | | 0.15 | 2 | 78 | 011 | -4.07 | 011 | 011 | UTE | 52 | 460 |
| MRPC Special Int. | 91 | 107 | VOL | | 0.19 | 2 | 78 | 014 | +1.03 | 014 | 014 | LTE | 61 | 460 |
| MRPC Special Int. | 91 | 118 | VOL | | 0.13 | 2 | 84 | 014 | +1.04 | 014 | 014 | LTE | 61 | 460 |
| MRPC Special Int. | 91 | 119 | WAR | 14 | 0.43 | P 3 | 0 | 015 | -0.75 | 015 | 015 | LTE | 61 | 460 WAR |
| MRPC Special Int. | 91 | 120 | VOL | | 0.30 | 2 | 66 | 008 | -0.73 | 008 | 008 | LTE | 54 | 460 |
| MRPC Special Int. | 91 | 125 | VOL | | 0.22 | 2 | 106 | 014 | +1.71 | 014 | 014 | LTE | 61 | 460 |
| MRPC Special Int. | | | VOL | | 0.25 | 2 | 87 | 014 | +1.88 | 014 | 014 | LTE | 61 | 460 |
| MRPC Special Int. | | | VOL | | 0.31 | 2 | 66 | 009 | +0.57 | 009 | 009 | LTE | 54 | 460 |
| MRPC Special Int. | 92 | 109 | VOL | | 0.23 | 2 | 40 | 013 | -6.57 | 013 | 013 | LTE | 54 | 460 |
| MRPC Special Int. | 92 | 112 | VOL | | 0.32 | 2 | 76 | 009 | -7.09 | 009 | 009 | LTE | 54 | 460 |
| MRPC Special Int. | 93 | 1 | MAI | | 0.84 | 2 | 36 | 010 | -8.01 to -5.97 | 010 | 010 | LTE | 68 | 460 |
| MRPC Special Int. | 93 | 11 | VOL | | 0.14 | 2 | 45 | 002 | -10.83 | 002 | 002 | LTE | 87 | 460 |
| MRPC Special Int. | 93 | 91 | SAI | | 0.13 | 2 | 80 | 010 | +7.69 | 011 | 010 | UTE | 56 | 520 |
| MRPC Special Int. | | | SAI | | 0.17 | 2 | 65 | 011 | +23.31 | 012 | 011 | UTE | 56 | 520 |
| MRPC Special Int. | | | SAI | | 0.18 | 2 | 66 | 011 | +22.43 | 012 | 011 | UTE | 56 | 520 |
| MRPC Special Int. | 93 | 123 | VOL | | 0.52 | 2 | 72 | 009 | +0.61 | 009 | 009 | UTE | 84 | 520 |
| MRPC Special Int. | | | VOL | | 0.53 | 2 | 86 | 009 | +1.04 | 009 | 009 | UTE | 84 | 520 |
| MRPC Special Int. | | | WAR | 15 | 0.45 | P 3 | 0 | 011 | -0.75 | 011 | 011 | LTE | 59 | 520 WAR |

ATTACHMENT A-3 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|-------|-----|-----|----------|---------|---------|-----|-------|---------|----------|
| MRPC Special Int. | 94 | 2 | VOL | | 0.42 | 2 | 64 | 012 | -0.81 | 012 | 012 | LTE | 68 460 | |
| MRPC Special Int. | | | WAR | 12 | 0.53 | P 3 | 0 | 011 | +0.70 | 011 | 011 | LTE | 68 460 | WAR |
| MRPC Special Int. | 94 | 26 | VOL | | 0.18 | 2 | 84 | 014 | +0.82 | 014 | 014 | UTE | 39 460 | |
| HL ROLL TRANSITION | 94 | 55 | VOL | | 0.16 | 2 | 113 | UTE | -3.35 | UTE | UTE | UTE | 106 460 | |
| MRPC Special Int. | 94 | 88 | SAI | | 0.08 | 2 | 80 | 007 | +10.97 | 008 | 007 | UTE | 56 520 | |
| MRPC Special Int. | | | SAI | | 0.08 | 2 | 84 | 007 | +10.76 | 008 | 007 | UTE | 56 520 | |
| MRPC Special Int. | | | SAI | | 0.15 | 2 | 79 | 007 | +9.21 | 008 | 007 | UTE | 56 520 | |
| MRPC Special Int. | 94 | 124 | VOL | | 0.22 | 2 | 56 | 001 | +10.29 | 001 | 001 | UTE | 84 520 | |
| MRPC Special Int. | 95 | 69 | VOL | | 0.11 | 2 | 69 | 014 | +24.29 | 015 | 014 | UTE | 53 460 | |
| MRPC Special Int. | 95 | 112 | VOL | | 0.18 | 2 | 69 | 012 | -5.92 | 012 | 012 | LTE | 59 520 | |
| MRPC Special Int. | 95 | 117 | VOL | | 0.18 | 2 | 65 | 014 | +10.20 | 014 | 014 | LTE | 61 460 | |
| MRPC Lane & Wedge | 96 | 2 | VOL | | 0.17 | 2 | 102 | 015 | +0.14 | 015 | 015 | UTE | 3 460 | |
| MRPC Special Int. | 96 | 4 | VOL | | 0.43 | 2 | 125 | 004 | -0.71 | 004 | 004 | LTE | 87 460 | |
| MRPC Special Int. | 96 | 63 | VOL | | 0.12 | 2 | 66 | 014 | +10.65 | 014 | 014 | LTE | 45 460 | |
| MRPC Special Int. | 97 | 14 | VOL | | 1.41 | 1 | 72 | 013 | +18.82 | 013 | 013 | UTE | 39 460 | |
| MRPC Special Int. | 97 | 31 | VOL | | 0.11 | 2 | 50 | 014 | +10.92 | 014 | 014 | UTE | 39 460 | |
| MRPC Special Int. | 97 | 60 | SAI | | 0.12 | 2 | 63 | 010 | -5.71 | 010 | 010 | LTE | 45 460 | |
| MRPC Special Int. | 97 | 118 | SVI | | 0.79 | 2 | 70 | 009 | +0.66 | 009 | 009 | LTE | 59 520 | |
| MRPC Special Int. | 97 | 119 | SVI | | 2.83 | 2 | 72 | 009 | +0.73 | 009 | 009 | LTE | 59 520 | |
| MRPC Special Int. | 98 | 3 | VOL | | 0.28 | 2 | 130 | 010 | +0.65 | 010 | 010 | UTE | 53 460 | |
| MRPC Special Int. | 98 | 91 | VOL | | 0.09 | 2 | 49 | 014 | -10.88 | 014 | 014 | UTE | 82 460 | |
| MRPC Special Int. | 98 | 118 | VOL | | 0.33 | 2 | 79 | 009 | +1.19 | 009 | 009 | LTE | 59 520 | |
| MRPC Special Int. | 98 | 119 | VOL | | 0.38 | 2 | 68 | 009 | +0.81 | 009 | 009 | LTE | 59 520 | |
| MRPC Special Int. | | | VOL | | 0.76 | 2 | 39 | 009 | +1.20 | 009 | 009 | LTE | 59 520 | |
| MRPC Special Int. | 98 | 122 | VOL | | 0.13 | 2 | 92 | 014 | +1.28 | 014 | 014 | UTE | 60 460 | |
| MRPC Special Int. | 98 | 126 | VOL | | 0.10 | 2 | 85 | LTS | +0.25 | LTS | LTS | LTE | 59 520 | |
| MRPC Special Int. | | | VOL | | 0.33 | 2 | 87 | LTS | +0.94 | LTS | LTS | LTE | 59 520 | |
| MRPC Special Int. | 98 | 127 | VOL | | 0.44 | 2 | 73 | LTS | +0.94 | LTS | LTS | LTE | 61 460 | |
| MRPC Special Int. | 99 | 3 | VOL | | 0.30 | 2 | 124 | 010 | +0.69 | 010 | 010 | UTE | 53 460 | |
| MRPC Special Int. | 99 | 11 | VOL | | 0.16 | 2 | 53 | 001 | -5.69 | 001 | 001 | UTE | 39 460 | |
| MRPC Special Int. | 99 | 14 | VOL | | 0.25 | 2 | 86 | 014 | +0.83 | 014 | 014 | UTE | 39 460 | |
| MRPC Special Int. | 99 | 53 | VOL | | 0.28 | 2 | 52 | 014 | -0.16 | 014 | 014 | UTE | 27 460 | |
| MRPC Special Int. | 99 | 56 | VOL | | 0.13 | 2 | 62 | 011 | -4.17 | 011 | 011 | UTE | 27 460 | |
| MRPC Special Int. | 100 | 65 | VOL | | 0.13 | 2 | 64 | 007 | +32.57 | 008 | 007 | UTE | 53 460 | |
| MRPC Special Int. | 101 | 6 | VOL | | 0.15 | 2 | 73 | 008 | +22.50 | 008 | 008 | UTE | 39 460 | |
| MRPC Special Int. | 101 | 16 | VOL | | 0.12 | 2 | 58 | 009 | +20.76 | 009 | 009 | UTE | 39 460 | |
| MRPC Special Int. | 102 | 10 | SAI | | 0.12 | 2 | 84 | 013 | -1.75 | 013 | 013 | UTE | 39 460 | |
| MRPC Special Int. | 102 | 12 | VOL | | 0.70 | 2 | 79 | 014 | +0.72 | 014 | 014 | UTE | 39 460 | |
| MRPC Special Int. | 102 | 14 | VOL | | 0.17 | 2 | 65 | 014 | +20.52 | 014 | 014 | UTE | 39 460 | |
| MRPC Special Int. | 102 | 105 | VOL | | 0.13 | 2 | 59 | 005 | -12.18 | 005 | 005 | LTE | 59 520 | |
| MRPC Special Int. | 102 | 109 | VOL | | 0.11 | 2 | 57 | 012 | +5.06 | 012 | 012 | LTE | 59 520 | |
| MRPC Special Int. | | | VOL | | 0.21 | 2 | 48 | LTS | +19.69 | LTS | LTS | LTE | 59 520 | |
| MRPC Special Int. | 103 | 3 | VOL | | 0.42 | 2 | 118 | 010 | +0.62 | 010 | 010 | UTE | 53 460 | |
| MRPC Special Int. | 103 | 104 | VOL | | 0.11 | 2 | 62 | 003 | -4.83 | 003 | 003 | LTE | 59 520 | |
| MRPC Special Int. | 103 | 111 | VOL | | 0.41 | 2 | 118 | 013 | +0.89 | 013 | 013 | UTE | 56 520 | |
| MRPC Special Int. | 104 | 14 | VOL | | 0.07 | 2 | 57 | 015 | -5.25 | 015 | 015 | UTE | 39 460 | |
| MRPC Special Int. | 104 | 20 | VOL | | 0.32 | 2 | 85 | LTE | +20.39 | LTS | LTE | UTE | 39 460 | |
| HL ROLL TRANSITION | 104 | 74 | SAI | | 1.41 | 2 | 23 | UTE | -0.31 | UTE | UTE | UTE | 117 460 | |
| MRPC Special Int. | 104 | 112 | VOL | | 0.26 | 2 | 40 | 015 | +0.00 | 015 | 015 | UTE | 56 520 | |
| MRPC Special Int. | | | VOL | | 0.28 | 2 | 36 | 015 | +0.35 | 015 | 015 | UTE | 56 520 | |
| MRPC Special Int. | 104 | 120 | WAR | 22 | 0.74 | P 3 | 0 | 009 | -0.71 | 009 | 009 | LTE | 59 520 | WAR |
| MRPC Special Int. | 104 | 122 | WAR | 18 | 0.59 | P 3 | 0 | 010 | -0.59 | 010 | 010 | LTE | 59 520 | WAR |
| MRPC Special Int. | 105 | 105 | VOL | | 0.14 | 2 | 57 | 015 | +15.65 | UTS | 015 | UTE | 56 520 | |
| MRPC Special Int. | 107 | 100 | SAI | | 0.22 | 2 | 84 | UTS | -4.97 | UTS | UTS | LTE | 61 460 | |
| MRPC Special Int. | 107 | 117 | VOL | | 0.30 | 2 | 147 | 010 | -0.12 | 010 | 010 | LTE | 59 520 | |
| MRPC Special Int. | 108 | 4 | VOL | | 0.29 | 2 | 65 | 009 | -0.62 | 009 | 009 | UTE | 53 460 | |
| MRPC Special Int. | 108 | 41 | VOL | | 0.25 | 2 | 65 | 012 | +9.13 | 012 | 012 | UTE | 27 460 | |
| MRPC Special Int. | 108 | 109 | SAI | | 0.43 | 2 | 31 | 001 | -0.96 | 001 | 001 | LTE | 59 520 | |
| MRPC Special Int. | 109 | 9 | VOL | | 0.21 | 2 | 55 | LTE | +18.21 | LTS | LTE | UTE | 39 460 | |
| MRPC Special Int. | 109 | 88 | VOL | | 0.35 | 2 | 76 | 002 | +13.66 | 002 | 002 | UTE | 49 460 | |
| MRPC Special Int. | 109 | 110 | VOL | | 0.12 | 2 | 63 | 010 | +25.42 | 010 | 010 | LTE | 45 460 | |
| MRPC Special Int. | | | VOL | | 0.13 | 2 | 66 | 010 | +23.88 | 010 | 010 | LTE | 45 460 | |
| MRPC Special Int. | | | VOL | | 0.18 | 2 | 63 | 010 | +20.34 | 010 | 010 | LTE | 45 460 | |
| MRPC Special Int. | 109 | 111 | SVI | | 2.10 | 2 | 76 | 010 | +0.91 | 010 | 010 | LTE | 45 460 | |
| MRPC Special Int. | 109 | 112 | VOL | | 0.09 | 2 | 83 | 012 | +1.27 | 012 | 012 | LTE | 45 460 | |

ATTACHMENT A-3 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|-------|-----|-----|----------|---------|---------|-----|-------|---------|----------|
| HL ROLL TRANSITION | 110 | 95 | SAI | | 1.39 | 2 | 26 | UTE | -0.21 | UTE | UTE | UTE | 120 460 | |
| MRPC Special Int. | 110 | 105 | VOL | | 0.22 | 2 | 74 | 014 | +0.88 | 014 | 014 | LTE | 44 460 | |
| MRPC Special Int. | 110 | 111 | SVI | | 0.80 | 2 | 103 | 010 | +1.32 | 010 | 010 | LTE | 45 460 | |
| MRPC Special Int. | 110 | 112 | SVI | | 1.04 | 2 | 43 | 010 | +1.32 | 010 | 010 | LTE | 45 460 | |
| MRPC Special Int. | 111 | 111 | VOL | | 0.37 | 2 | 69 | 012 | +1.39 | 012 | 012 | LTE | 44 460 | |
| MRPC Special Int. | 112 | 16 | VOL | | 0.10 | 2 | 70 | 012 | +23.00 | 012 | 012 | UTE | 39 460 | |
| MRPC Special Int. | 112 | 18 | VOL | | 0.09 | 2 | 80 | 011 | +9.08 | 011 | 011 | UTE | 39 460 | |
| MRPC Special Int. | 112 | 25 | VOL | | 0.30 | 2 | 165 | 015 | +0.30 | 015 | 015 | UTE | 39 460 | |
| MRPC Special Int. | 112 | 112 | VOL | | 0.13 | 2 | 90 | 012 | +1.13 | 012 | 012 | LTE | 44 460 | |
| MRPC Special Int. | 112 | 116 | VOL | | 0.12 | 2 | 81 | 014 | -1.04 | 014 | 014 | LTE | 61 460 | |
| MRPC Special Int. | 113 | 93 | VOL | | 0.15 | 2 | 67 | 012 | +19.01 | 012 | 012 | LTE | 44 460 | |
| MRPC Special Int. | 113 | 95 | VOL | | 0.13 | 2 | 76 | 009 | +2.03 | 009 | 009 | LTE | 44 460 | |
| MRPC Special Int. | 113 | 103 | VOL | | 0.33 | 2 | 85 | 014 | +0.90 | 014 | 014 | LTE | 44 460 | |
| MRPC Special Int. | 113 | 112 | VOL | | 0.12 | 2 | 78 | 012 | +1.05 | 012 | 012 | LTE | 44 460 | |
| MRPC Special Int. | 114 | 21 | VOL | | 0.07 | 2 | 61 | 011 | -5.40 | 011 | 011 | UTE | 39 460 | |
| HL ROLL TRANSITION | 114 | 63 | VOL | | 0.19 | 2 | 125 | UTE | -2.17 | UTE | UTE | UTE | 130 460 | |
| MRPC Special Int. | 114 | 103 | VOL | | 0.19 | 2 | 74 | 014 | +1.41 | 014 | 014 | LTE | 44 460 | |
| MRPC Special Int. | 114 | 110 | VOL | | 0.31 | 2 | 27 | 009 | -0.58 | 009 | 009 | LTE | 44 460 | |
| MRPC Special Int. | 114 | 114 | WAR | 9 | 0.31 | P 3 | 0 | 010 | +0.78 | 010 | 010 | LTE | 44 460 | WAR |
| MRPC Special Int. | 114 | 115 | VOL | | 0.24 | 2 | 9 | 015 | +18.17 | 015 | 015 | LTE | 44 460 | |
| MRPC Special Int. | 115 | 61 | WAR | 12 | 0.80 | P 3 | 0 | 004 | -0.65 | 004 | 004 | UTE | 8 460 | WAR |
| MRPC Special Int. | 115 | 66 | VOL | | 0.13 | 2 | 36 | 011 | -9.47 | 011 | 011 | UTE | 8 460 | |
| MRPC Special Int. | 115 | 102 | VOL | | 0.24 | 2 | 0 | 002 | +10.31 | 002 | 002 | UTE | 46 460 | |
| MRPC Special Int. | 116 | 5 | SAI | | 0.05 | 2 | 72 | 011 | +5.14 | 011 | 011 | LTE | 35 460 | |
| MRPC Special Int. | | SAI | | | 0.06 | 2 | 58 | 011 | +5.40 | 011 | 011 | LTE | 35 460 | |
| MRPC Special Int. | | SAI | | | 0.12 | 2 | 75 | 011 | +4.28 | 011 | 011 | LTE | 35 460 | |
| MRPC Special Int. | 116 | 21 | VOL | | 0.20 | 2 | 56 | 014 | +0.48 | 014 | 014 | LTE | 35 460 | |
| MRPC Special Int. | 116 | 52 | SAI | | 0.08 | 2 | 81 | 011 | +8.78 | 011 | 011 | LTE | 21 460 | |
| MRPC Special Int. | | SAI | | | 0.13 | 2 | 56 | 011 | +7.14 | 011 | 011 | LTE | 21 460 | |
| MRPC Special Int. | 116 | 77 | VOL | | 0.10 | 2 | 63 | 004 | -18.97 | 004 | 004 | UTE | 8 460 | |
| MRPC Special Int. | 116 | 98 | VOL | | 0.19 | 2 | 0 | 008 | -6.05 | 008 | 008 | UTE | 46 460 | |
| MRPC Special Int. | 116 | 107 | WAR | 9 | 0.39 | P 4 | 0 | 009 | -0.57 | 009 | 009 | UTE | 46 460 | WAR |
| MRPC Special Int. | 116 | 113 | VOL | | 1.07 | 2 | 72 | 015 | +21.56 | 015 | 015 | UTE | 46 460 | |
| MRPC Special Int. | 117 | 10 | VOL | | 0.13 | 2 | 58 | 010 | +4.51 | 010 | 010 | LTE | 35 460 | |
| MRPC Special Int. | 117 | 20 | VOL | | 0.31 | 2 | 100 | 015 | +0.95 | 015 | 015 | LTE | 35 460 | |
| MRPC Special Int. | 117 | 49 | VOL | | 0.35 | 2 | 56 | 015 | +0.75 | 015 | 015 | LTE | 21 460 | |
| MRPC Special Int. | 117 | 89 | WAR | 8 | 0.34 | P 4 | 0 | 015 | +0.77 | 015 | 015 | UTE | 46 460 | WAR |
| MRPC Special Int. | 117 | 90 | VOL | | 0.38 | 2 | 0 | 015 | +0.72 | 015 | 015 | UTE | 46 460 | |
| MRPC Special Int. | 117 | 107 | VOL | | 0.11 | 2 | 0 | 010 | +20.00 | 010 | 010 | UTE | 46 460 | |
| HL ROLL TRANSITION | 117 | 108 | SCI | | 1.67 | P 1 | 14 | UTE | -0.25 | UTE | UTE | UTE | 132 460 | |
| MRPC Special Int. | 118 | 21 | VOL | | 0.08 | 2 | 52 | 010 | +15.27 | 010 | 010 | LTE | 35 460 | |
| MRPC Special Int. | 118 | 90 | VOL | | 0.25 | 2 | 0 | 012 | -5.26 | 012 | 012 | UTE | 46 460 | |
| MRPC Special Int. | 118 | 100 | VOL | | 0.10 | 2 | 0 | 010 | +14.21 | 010 | 010 | UTE | 46 460 | |
| MRPC Special Int. | 118 | 101 | WAR | 4 | 0.18 | P 4 | 0 | 009 | -0.71 | 009 | 009 | UTE | 46 460 | WAR |
| MRPC Special Int. | 119 | 3 | SAI | | 0.14 | 2 | 67 | 012 | -7.89 | 012 | 012 | LTE | 35 460 | |
| MRPC Special Int. | | SAI | | | 0.17 | 2 | 58 | 012 | -1.62 | 012 | 012 | LTE | 35 460 | |
| MRPC Special Int. | | SAI | | | 0.18 | 2 | 68 | 012 | -10.32 | 012 | 012 | LTE | 35 460 | |
| MRPC Special Int. | | SAI | | | 0.21 | 2 | 70 | 012 | -6.50 | 012 | 012 | LTE | 35 460 | |
| MRPC Special Int. | 119 | 55 | WAR | 16 | 1.08 | P 3 | 0 | 003 | +0.56 | 003 | 003 | UTE | 8 460 | WAR |
| MRPC Special Int. | 119 | 84 | VOL | | 0.13 | 2 | 81 | 001 | +7.19 | 001 | 001 | UTE | 8 460 | |
| MRPC Special Int. | 119 | 107 | SAI | | 0.16 | 2 | 75 | 013 | +18.99 | 013 | 013 | UTE | 46 460 | |
| MRPC Special Int. | | SAI | | | 0.21 | 2 | 85 | 013 | +22.02 | 013 | 013 | UTE | 46 460 | |
| MRPC Special Int. | 120 | 55 | VOL | | 0.07 | 2 | 87 | 011 | +2.61 | 011 | 011 | UTE | 8 460 | |
| MRPC Special Int. | 120 | 69 | VOL | | 0.12 | 2 | 78 | 004 | -4.00 | 004 | 004 | UTE | 8 460 | |
| MRPC Special Int. | 120 | 106 | SAI | | 0.07 | 2 | 102 | 011 | +8.12 | 011 | 011 | UTE | 46 460 | |
| MRPC Special Int. | | SAI | | | 0.10 | 2 | 93 | 013 | +27.05 | 014 | 013 | UTE | 46 460 | |
| MRPC Special Int. | | SAI | | | 0.11 | 2 | 75 | 010 | +23.79 | 010 | 010 | UTE | 46 460 | |
| MRPC Special Int. | | SAI | | | 0.14 | 2 | 82 | 013 | +28.30 | 014 | 013 | UTE | 46 460 | |
| MRPC Special Int. | | SAI | | | 0.16 | 2 | 81 | 013 | +26.06 | 014 | 013 | UTE | 46 460 | |
| MRPC Special Int. | | SAI | | | 0.16 | 2 | 104 | 011 | +6.63 | 011 | 011 | UTE | 46 460 | |
| MRPC Special Int. | | SAI | | | 0.18 | 2 | 74 | 013 | +30.67 | 014 | 013 | UTE | 46 460 | |
| MRPC Special Int. | | SAI | | | 0.18 | 2 | 76 | 013 | +29.63 | 014 | 013 | UTE | 46 460 | |
| MRPC Special Int. | | SAI | | | 0.21 | 2 | 86 | 010 | +24.83 | 010 | 010 | UTE | 46 460 | |
| MRPC Special Int. | 121 | 3 | SAI | | 0.37 | 2 | 80 | 015 | -1.25 | 015 | 015 | LTE | 35 460 | |
| MRPC Special Int. | 121 | 5 | VOL | | 0.32 | 2 | 125 | 010 | +0.60 | 010 | 010 | LTE | 35 460 | |

ATTACHMENT A-3 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | *TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|----------|-----|-----|------------------|---------|---------|-----|-------|-------|----------|
| MRPC Special Int. | 121 | 42 | VOL | | 0.13 2 | 83 | 008 | -5.19 | 008 | 008 | LTE | 21 | 460 | |
| MRPC Special Int. | 121 | 100 | SAI | | 0.11 2 | 80 | 012 | -9.47 | 012 | 012 | UTE | 46 | 460 | |
| MRPC Special Int. | | | SAI | | 0.13 2 | 53 | 012 | -3.26 | 012 | 012 | UTE | 46 | 460 | |
| MRPC Special Int. | | | SAI | | 0.14 2 | 72 | 012 | +4.69 | 012 | 012 | UTE | 46 | 460 | |
| MRPC Special Int. | 122 | 3 | SAI | | 0.15 2 | 86 | 015 | -1.17 | 015 | 015 | LTE | 35 | 460 | |
| MRPC Special Int. | 122 | 8 | VOL | | 0.09 2 | 75 | 001 | -6.07 | 001 | 001 | LTE | 35 | 460 | |
| MRPC Special Int. | 122 | 85 | WAR | 7 | 0.30 P 4 | 0 | 003 | -0.83 | 003 | 003 | UTE | 46 | 460 | WAR |
| MRPC Special Int. | 122 | 92 | VOL | | 0.09 2 | 0 | 013 | +24.25 | 013 | 013 | UTE | 46 | 460 | |
| MRPC Special Int. | 123 | 29 | VOL | | 0.33 2 | 78 | 015 | +0.62 | 015 | 015 | LTE | 21 | 460 | |
| MRPC Special Int. | 123 | 103 | SCI | | 0.16 P 1 | 101 | UTS | +0.07 | UTS | UTS | UTE | 46 | 460 | |
| MRPC Special Int. | 124 | 2 | SAI | | 0.30 2 | 93 | 015 | -1.40 | 015 | 015 | LTE | 35 | 460 | |
| MRPC Special Int. | 124 | 4 | WAR | 10 | 0.49 P 3 | 0 | 010 | +0.67 | 010 | 010 | LTE | 35 | 460 | WAR |
| MRPC Special Int. | 124 | 58 | VOL | | 0.17 2 | 59 | 013 | -8.65 | 013 | 013 | UTE | 16 | 460 | |
| MRPC Special Int. | 124 | 72 | VOL | | 0.11 2 | 63 | 012 | -17.96 | 012 | 012 | UTE | 8 | 460 | |
| MRPC Special Int. | 124 | 85 | VOL | | 0.25 2 | 141 | 003 | -0.83 | 003 | 003 | UTE | 90 | 520 | |
| MRPC Special Int. | 125 | 1 | SAI | | 0.22 2 | 71 | 015 | -5.36 | 015 | 015 | LTE | 35 | 460 | |
| MRPC Special Int. | 125 | 4 | WAR | 14 | 0.63 P 3 | 0 | 010 | +0.69 | 010 | 010 | LTE | 35 | 460 | WAR |
| HL ROLL TRANSITION | 125 | 18 | SAI | | 1.51 2 | 23 | UTE | -0.22 | UTE | UTE | UTE | 38 | 460 | |
| MRPC Special Int. | 125 | 36 | VOL | | 0.35 2 | 51 | 015 | +0.63 | 015 | 015 | LTE | 21 | 460 | |
| MRPC Special Int. | 125 | 45 | VOL | | 0.16 2 | 58 | 004 | -7.29 | 004 | 004 | LTE | 21 | 460 | |
| MRPC Special Int. | 125 | 50 | VOL | | 0.17 2 | 66 | 011 | -2.91 | 011 | 011 | LTE | 21 | 460 | |
| MRPC Special Int. | 125 | 99 | VOL | | 0.11 2 | 0 | 011 | -10.30 | 011 | 011 | UTE | 46 | 460 | |
| MRPC Special Int. | | | VOL | | 0.18 2 | 0 | 011 | -12.38 | 011 | 011 | UTE | 46 | 460 | |
| MRPC Special Int. | | | WAR | 5 | 0.20 P 4 | 0 | 011 | +0.70 | 011 | 011 | UTE | 46 | 460 | WAR |
| MRPC Special Int. | 126 | 1 | SAI | | 0.17 2 | 84 | 015 | -1.83 | 015 | 015 | LTE | 35 | 460 | |
| MRPC Special Int. | 126 | 2 | VOL | | 0.14 2 | 69 | UTS | +15.00 | UTS | UTS | LTE | 41 | 460 | |
| MRPC Special Int. | 126 | 4 | WAR | 24 | 0.97 P 3 | 0 | 010 | +0.59 | 010 | 010 | LTE | 41 | 460 | WAR |
| MRPC Special Int. | 126 | 5 | WAR | 18 | 0.66 P 3 | 0 | 010 | +0.64 | 010 | 010 | LTE | 41 | 460 | WAR |
| HL ROLL TRANSITION | 126 | 18 | SAI | | 0.57 2 | 16 | UTE | -0.20 | UTE | UTE | UTE | 38 | 460 | |
| MRPC Special Int. | 126 | 91 | VOL | | 0.12 2 | 0 | 013 | +0.92 | 013 | 013 | UTE | 46 | 460 | |
| MRPC Special Int. | 127 | 5 | WAR | 23 | 0.94 P 3 | 0 | 010 | +0.62 | 010 | 010 | LTE | 41 | 460 | WAR |
| MRPC Special Int. | 127 | 30 | VOL | | 0.19 2 | 137 | 014 | +0.48 | 014 | 014 | LTE | 21 | 460 | |
| MRPC Special Int. | 127 | 92 | WAR | 8 | 0.97 P 3 | 0 | 009 | +0.67 | 009 | 009 | UTE | 43 | 460 | WAR |
| MRPC Special Int. | | | WAR | 10 | 1.15 P 3 | 0 | 009 | -0.71 | 009 | 009 | UTE | 43 | 460 | WAR |
| MRPC Special Int. | 127 | 98 | SAI | | 0.10 2 | 77 | 013 | +23.36 | 013 | 013 | UTE | 46 | 460 | |
| MRPC Special Int. | | | SVI | | 0.84 2 | 0 | 011 | +4.33 | 011 | 011 | UTE | 46 | 460 | |
| MRPC Special Int. | 128 | 4 | VOL | | 0.23 P 1 | 117 | 010 | +0.32 | 010 | 010 | UTE | 79 | 520 | |
| MRPC Special Int. | 129 | 25 | VOL | | 0.29 2 | 82 | 015 | -0.95 | 015 | 015 | LTE | 21 | 460 | |
| MRPC Special Int. | 129 | 27 | VOL | | 0.31 2 | 114 | 003 | -0.75 | 003 | 003 | LTE | 21 | 460 | |
| MRPC Special Int. | 129 | 86 | VOL | | 0.20 2 | 67 | 015 | +25.83 | 015 | 015 | UTE | 43 | 460 | |
| MRPC Special Int. | 129 | 91 | VOL | | 0.30 2 | 144 | 005 | -0.77 | 005 | 005 | UTE | 43 | 460 | |
| MRPC Special Int. | 130 | 1 | VOL | | 2.65 1 | 98 | 013 | +3.40 | 013 | 013 | LTE | 35 | 460 | |
| MRPC Special Int. | 130 | 4 | VOL | | 0.34 2 | 133 | 010 | +0.55 | 010 | 010 | LTE | 41 | 460 | |
| MRPC Special Int. | 130 | 6 | VOL | | 0.59 2 | 129 | 010 | +0.55 | 010 | 010 | LTE | 41 | 460 | |
| MRPC Special Int. | 130 | 26 | VOL | | 0.21 2 | 125 | 014 | +0.46 | 014 | 014 | LTE | 21 | 460 | |
| MRPC Special Int. | 130 | 93 | SAI | | 0.13 2 | 102 | 010 | +23.50 to +26.50 | 011 | 010 | UTE | 43 | 460 | |
| HL ROLL TRANSITION | 131 | 4 | SAI | | 2.28 2 | 18 | UTE | -0.12 | UTE | UTE | UTE | 38 | 460 | |
| MRPC Special Int. | 131 | 5 | VOL | | 0.52 2 | 111 | 009 | +0.29 | 009 | 009 | LTE | 41 | 460 | |
| MRPC Special Int. | 131 | 36 | VOL | | 0.09 2 | 79 | 014 | +0.99 | 014 | 014 | LTE | 21 | 460 | |
| MRPC Special Int. | 131 | 68 | VOL | | 0.22 2 | 58 | 015 | +14.50 | 015 | 015 | UTE | 16 | 460 | |
| MRPC Special Int. | 131 | 80 | VOL | | 0.18 2 | 63 | 012 | -2.66 | 012 | 012 | UTE | 43 | 460 | |
| HL ROLL TRANSITION | 131 | 86 | VOL | | 0.36 2 | 122 | UTE | -2.44 | UTE | UTE | UTE | 141 | 460 | |
| MRPC Special Int. | 131 | 90 | VOL | | 0.29 2 | 80 | 007 | -0.56 | 007 | 007 | UTE | 43 | 460 | |
| HL ROLL TRANSITION | 132 | 11 | SAI | | 0.93 2 | 20 | UTE | -0.18 | UTE | UTE | UTE | 38 | 460 | |
| HL ROLL TRANSITION | 132 | 60 | SAI | | 1.25 2 | 18 | UTE | -0.25 | UTE | UTE | UTE | 89 | 460 | |
| MRPC Special Int. | 132 | 75 | VOL | | 0.30 2 | 57 | 008 | +11.48 | 008 | 008 | UTE | 43 | 460 | |
| MRPC Special Int. | 132 | 80 | VOL | | 0.35 2 | 97 | 008 | -0.85 | 008 | 008 | UTE | 43 | 460 | |
| MRPC Special Int. | 132 | 82 | WAR | 6 | 0.73 P 3 | 0 | 009 | +0.55 | 009 | 009 | UTE | 43 | 460 | WAR |
| MRPC Special Int. | 132 | 84 | SAI | | 0.10 2 | 90 | 011 | +22.36 | 011 | 011 | UTE | 43 | 460 | |
| MRPC Special Int. | | | SAI | | 0.12 2 | 108 | 012 | +22.71 | 012 | 012 | UTE | 43 | 460 | |
| MRPC Special Int. | | | SAI | | 0.14 2 | 80 | 011 | +25.40 | 011 | 011 | UTE | 43 | 460 | |
| MRPC Special Int. | | | WAR | 8 | 0.96 P 3 | 0 | 011 | -0.84 | 011 | 011 | UTE | 43 | 460 | WAR |
| MRPC Special Int. | 132 | 85 | SAI | | 0.15 2 | 97 | 011 | +5.44 to +7.50 | 011 | 011 | UTE | 43 | 460 | |
| HL ROLL TRANSITION | 133 | 10 | SAI | | 0.66 2 | 21 | UTE | -0.14 | UTE | UTE | UTE | 38 | 460 | |
| HL ROLL TRANSITION | 134 | 10 | SAI | | 0.92 2 | 16 | UTE | -0.14 | UTE | UTE | UTE | 38 | 460 | |

ATTACHMENT A-3 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-------------------|-----|------|-----|-----|----------|-----|-----|----------|---------|---------|-----|-------|--------|----------|
| MRPC Special Int. | 134 | 28 | SAI | | 0.07 2 | | 100 | 012 | +10.73 | 012 | 012 | LTE | 21 460 | |
| MRPC Special Int. | | | SAI | | 0.09 2 | | 73 | 012 | -8.27 | 012 | 012 | LTE | 21 460 | |
| MRPC Special Int. | | | SAI | | 0.10 2 | | 77 | 011 | +5.63 | 011 | 011 | LTE | 21 460 | |
| MRPC Special Int. | | | SAI | | 0.11 2 | | 74 | 011 | +7.09 | 011 | 011 | LTE | 21 460 | |
| MRPC Special Int. | | | SAI | | 0.11 2 | | 82 | 011 | -4.97 | 011 | 011 | LTE | 21 460 | |
| MRPC Special Int. | | | SAI | | 0.13 2 | | 69 | 011 | -3.43 | 011 | 011 | LTE | 21 460 | |
| MRPC Special Int. | | | SAI | | 0.15 2 | | 69 | 012 | -10.64 | 012 | 012 | LTE | 21 460 | |
| MRPC Special Int. | | | SAI | | 0.16 2 | | 75 | 011 | -4.53 | 011 | 011 | LTE | 21 460 | |
| MRPC Special Int. | | | SAI | | 0.17 2 | | 65 | 011 | +7.69 | 011 | 011 | LTE | 21 460 | |
| MRPC Special Int. | | | SAI | | 0.17 2 | | 72 | 011 | -3.95 | 011 | 011 | LTE | 21 460 | |
| MRPC Special Int. | | | SAI | | 0.18 2 | | 80 | 012 | -9.66 | 012 | 012 | LTE | 21 460 | |
| MRPC Special Int. | 134 | 32 | VOL | | 0.14 2 | | 70 | 007 | +17.78 | 007 | 007 | LTE | 21 460 | |
| MRPC Special Int. | 134 | 33 | WAR | 22 | 0.94 P 3 | | 0 | 004 | -0.80 | 004 | 004 | LTE | 67 460 | WAR |
| MRPC Special Int. | 134 | 37 | VOL | | 0.22 2 | | 57 | 010 | +15.43 | 010 | 010 | LTE | 75 460 | |
| MRPC Special Int. | 134 | 84 | VOL | | 0.21 2 | | 156 | 010 | +0.66 | 010 | 010 | UTE | 43 460 | |
| MRPC Special Int. | 134 | 85 | WAR | 6 | 0.66 P 3 | | 0 | 007 | +0.17 | 007 | 007 | UTE | 43 460 | WAR |
| MRPC Special Int. | 135 | 75 | VOL | | 0.09 2 | | 84 | 008 | -1.64 | 008 | 008 | UTE | 43 460 | |
| MRPC Special Int. | 136 | 3 | WAR | 18 | 0.99 P 3 | | 0 | 014 | -0.86 | 014 | 014 | LTE | 41 460 | WAR |
| MRPC Special Int. | 136 | 20 | VOL | | 0.18 2 | | 81 | 014 | +0.41 | 014 | 014 | LTE | 21 460 | |
| MRPC Special Int. | 136 | 29 | VOL | | 0.27 2 | | 82 | 015 | +0.57 | 015 | 015 | LTE | 21 460 | |
| MRPC Special Int. | 136 | 34 | SAI | | 0.18 2 | | 73 | 014 | +11.82 | 014 | 014 | LTE | 21 460 | |
| MRPC Special Int. | | | SAI | | 0.19 2 | | 87 | 014 | +1.92 | 014 | 014 | LTE | 21 460 | |
| MRPC Special Int. | | | SAI | | 0.21 2 | | 80 | 013 | +4.95 | 013 | 013 | LTE | 21 460 | |
| MRPC Special Int. | | | SAI | | 0.22 2 | | 82 | 014 | +10.48 | 014 | 014 | LTE | 21 460 | |
| MRPC Special Int. | | | SAI | | 0.24 2 | | 76 | 014 | +13.88 | 014 | 014 | LTE | 21 460 | |
| MRPC Special Int. | | | SAI | | 0.24 2 | | 83 | 014 | +12.40 | 014 | 014 | LTE | 21 460 | |
| MRPC Special Int. | 136 | 76 | WAR | 12 | 1.33 P 3 | | 0 | 009 | -0.56 | 009 | 009 | UTE | 43 460 | WAR |
| MRPC Special Int. | 136 | 78 | SAI | | 0.18 2 | | 94 | 015 | +2.54 | 015 | 015 | UTE | 43 460 | |
| MRPC Special Int. | 137 | 3 | WAR | 10 | 0.60 P 3 | | 0 | 010 | -0.79 | 010 | 010 | LTE | 38 460 | WAR |
| MRPC Special Int. | 137 | 60 | VOL | | 0.41 2 | | 166 | 004 | -0.75 | 004 | 004 | UTE | 18 460 | |
| MRPC Special Int. | 137 | 73 | VOL | | 0.09 2 | | 49 | 015 | -5.38 | 015 | 015 | UTE | 43 460 | |
| MRPC Special Int. | 137 | 75 | SAI | | 0.10 2 | | 108 | 015 | +1.30 | 015 | 015 | UTE | 43 460 | |
| MRPC Special Int. | 137 | 76 | SAI | | 0.16 2 | | 82 | 015 | +1.90 | 015 | 015 | UTE | 43 460 | |
| MRPC Special Int. | 137 | 78 | WAR | 9 | 0.98 P 3 | | 0 | 010 | -0.21 | 010 | 010 | UTE | 43 460 | WAR |
| MRPC Special Int. | 138 | 18 | VOL | | 0.13 2 | | 62 | LTS | +20.63 | LTS | LTS | LTE | 21 460 | |
| MRPC Special Int. | 139 | 3 | WAR | 5 | 0.24 P 3 | | 0 | 010 | +0.58 | 010 | 010 | LTE | 35 460 | WAR |
| MRPC Special Int. | 139 | 5 | VOL | | 0.37 2 | | 95 | 008 | -0.36 | 008 | 008 | LTE | 35 460 | |
| MRPC Special Int. | 139 | 51 | SAI | | 0.12 2 | | 62 | 010 | +4.70 | 010 | 010 | UTE | 18 460 | |
| MRPC Special Int. | | | SAI | | 0.16 2 | | 70 | 010 | +3.87 | 010 | 010 | UTE | 18 460 | |
| MRPC Special Int. | 139 | 62 | SAI | | 0.07 2 | | 64 | 011 | +32.93 | 011 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.08 2 | | 92 | 011 | +31.36 | 011 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.10 2 | | 86 | 011 | +28.33 | 011 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.12 2 | | 87 | 011 | +29.27 | 011 | 011 | UTE | 25 460 | |
| MRPC Special Int. | 139 | 69 | SAI | | 0.11 2 | | 84 | 014 | -0.91 | 014 | 014 | UTE | 25 460 | |
| MRPC Special Int. | 139 | 72 | SAI | | 0.11 2 | | 82 | 012 | +31.77 | 012 | 012 | UTE | 39 460 | |
| MRPC Special Int. | | | SAI | | 0.15 2 | | 73 | 012 | +29.57 | 012 | 012 | UTE | 39 460 | |
| MRPC Special Int. | | | SAI | | 0.18 2 | | 76 | 013 | +10.21 | 013 | 013 | UTE | 39 460 | |
| MRPC Special Int. | | | SAI | | 0.23 2 | | 88 | 010 | +18.33 | 010 | 010 | UTE | 39 460 | |
| MRPC Special Int. | 139 | 74 | SAI | | 0.14 2 | | 110 | 015 | +7.22 | 015 | 015 | UTE | 39 460 | |
| MRPC Special Int. | | | SAI | | 0.15 2 | | 111 | 015 | +2.80 | 015 | 015 | UTE | 39 460 | |
| MRPC Special Int. | | | SAI | | 0.18 2 | | 116 | 015 | +1.71 | 015 | 015 | UTE | 39 460 | |
| MRPC Special Int. | 140 | 1 | WAR | 20 | 0.79 P 3 | | 0 | 011 | -0.90 | 011 | 011 | LTE | 41 460 | WAR |
| MRPC Special Int. | | | WAR | 21 | 0.82 P 3 | | 0 | 012 | -0.79 | 012 | 012 | LTE | 41 460 | WAR |
| MRPC Special Int. | 140 | 3 | WAR | 9 | 0.41 P 3 | | 0 | 010 | -0.35 | 010 | 010 | LTE | 35 460 | WAR |
| MRPC H/L Plugs | 140 | 36 | SAI | | 13.71 1 | | 9 | UTE | -0.62 | UTE | UTE | UTE | 4 410 | |
| MRPC Special Int. | 140 | 71 | VOL | | 0.36 2 | | 78 | 014 | -0.43 | 014 | 014 | UTE | 90 520 | |
| MRPC Special Int. | 141 | 1 | WAR | 22 | 1.09 P 3 | | 0 | 014 | -0.69 | 014 | 014 | LTE | 35 460 | WAR |
| MRPC Special Int. | 141 | 46 | VOL | | 0.12 2 | | 52 | 001 | +2.04 | 001 | 001 | UTE | 25 460 | |
| MRPC Special Int. | 141 | 55 | VOL | | 0.10 P 4 | | 47 | 015 | +0.26 | 015 | 015 | UTE | 25 460 | |
| MRPC Special Int. | 141 | 59 | WAR | 10 | 0.85 P 3 | | 83 | 008 | -0.76 | 008 | 008 | UTE | 25 460 | WAR |
| MRPC Special Int. | 142 | 1 | WAR | 7 | 0.45 P 3 | | 0 | 014 | -0.71 | 014 | 014 | UTE | 79 520 | WAR |
| MRPC Special Int. | 142 | 8 | VOL | | 0.17 2 | | 70 | 008 | -0.77 | 008 | 008 | LTE | 21 460 | |
| MRPC Special Int. | | | VOL | | 0.45 2 | | 111 | 008 | -0.50 | 008 | 008 | LTE | 21 460 | |
| MRPC Special Int. | 142 | 12 | VOL | | 0.15 2 | | 97 | 014 | +0.30 | 014 | 014 | LTE | 21 460 | |
| MRPC Special Int. | 142 | 27 | SAI | | 0.13 2 | | 70 | UTS | -2.60 | UTS | UTS | LTE | 21 460 | |

ATTACHMENT A-3 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | *TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|----------|-----|-----|----------|---------|---------|-----|-------|--------|----------|
| MRPC Special Int. | 142 | 40 | VOL | | 0.10 2 | | 71 | 013 | +1.59 | 013 | 013 | UTE | 25 460 | |
| MRPC Special Int. | 142 | 41 | VOL | | 0.17 2 | | 44 | 013 | +28.30 | 013 | 013 | UTE | 25 460 | |
| MRPC Special Int. | 142 | 54 | VOL | | 0.24 2 | | 109 | 015 | +0.26 | 015 | 015 | UTE | 25 460 | |
| HL ROLL TRANSITION | 142 | 58 | SAI | | 2.95 2 | | 24 | UTE | -0.16 | UTE | UTE | UTE | 26 460 | |
| MRPC Special Int. | 142 | 61 | VOL | | 0.16 2 | | 125 | 014 | +0.35 | 014 | 014 | UTE | 25 460 | |
| MRPC Special Int. | 143 | 3 | WAR | 20 | 0.76 P 3 | | 0 | 014 | -0.80 | 014 | 014 | LTE | 21 460 | WAR |
| MRPC Special Int. | 143 | 8 | WAR | 23 | 1.00 P 3 | | 0 | 008 | +0.49 | 008 | 008 | LTE | 67 460 | WAR |
| MRPC Special Int. | 143 | 27 | VOL | | 0.11 2 | | 68 | 013 | +12.94 | 013 | 013 | LTE | 31 460 | |
| MRPC Special Int. | 143 | 38 | VOL | | 0.23 2 | | 67 | 003 | +22.35 | 003 | 003 | UTE | 25 460 | |
| MRPC Special Int. | 143 | 49 | VOL | | 0.10 2 | | 86 | 013 | +1.12 | 013 | 013 | UTE | 25 460 | |
| HL ROLL TRANSITION | 143 | 55 | VOL | | 0.61 2 | | 75 | UTE | -0.83 | UTE | UTE | UTE | 26 460 | |
| HL ROLL TRANSITION | | | VOL | | 0.70 2 | | 58 | UTE | -0.61 | UTE | UTE | UTE | 26 460 | |
| MRPC Special Int. | 144 | 13 | VOL | | 0.11 2 | | 69 | 011 | +18.76 | 011 | 011 | LTE | 31 460 | |
| MRPC Special Int. | 144 | 31 | VOL | | 0.48 2 | | 95 | 001 | +0.74 | 001 | 001 | UTE | 25 460 | |
| MRPC Special Int. | 144 | 42 | MAI | | 0.09 2 | | 87 | 010 | +33.19 | 011 | 010 | UTE | 25 460 | |
| MRPC Special Int. | | | MAI | | 0.11 2 | | 117 | 012 | +7.95 | 013 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | MAI | | 0.16 2 | | 92 | 010 | +30.28 | 011 | 010 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.04 2 | | 81 | 012 | +22.86 | 013 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.05 2 | | 88 | 012 | +23.28 | 013 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.05 2 | | 97 | 012 | +24.04 | 013 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.05 2 | | 104 | 011 | +4.92 | 012 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.05 2 | | 104 | 011 | +35.19 | 012 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.06 2 | | 59 | 012 | +31.79 | 013 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.06 2 | | 103 | 011 | +31.10 | 012 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.06 2 | | 107 | 011 | +13.94 | 012 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.07 2 | | 71 | 010 | +25.08 | 011 | 010 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.07 2 | | 76 | 013 | +16.60 | 013 | 013 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.07 2 | | 78 | 011 | +10.42 | 012 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.07 2 | | 78 | 012 | +25.27 | 013 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.07 2 | | 90 | 012 | +34.26 | 013 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.07 2 | | 94 | 011 | +30.60 | 012 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.07 2 | | 95 | 012 | +28.80 | 013 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.07 2 | | 96 | 013 | +18.26 | 013 | 013 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.07 2 | | 112 | 012 | +4.04 | 013 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.08 2 | | 63 | 010 | +9.06 | 011 | 010 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.08 2 | | 67 | 012 | +21.38 | 013 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.08 2 | | 96 | 013 | +9.18 | 013 | 013 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.08 2 | | 97 | 011 | +1.61 | 012 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.08 2 | | 105 | 011 | +14.39 | 012 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.09 2 | | 65 | 012 | +20.90 | 013 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.09 2 | | 76 | 012 | +33.85 | 013 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.09 2 | | 80 | 012 | +11.40 | 013 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.09 2 | | 84 | 011 | +17.00 | 012 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.09 2 | | 91 | 011 | +30.02 | 012 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.09 2 | | 100 | 011 | +3.64 | 012 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.09 2 | | 109 | 012 | +6.24 | 013 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.09 2 | | 111 | 011 | +34.33 | 012 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.10 2 | | 66 | 011 | +7.16 | 012 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.10 2 | | 86 | 010 | +9.91 | 011 | 010 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.10 2 | | 88 | 011 | +15.97 | 012 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.10 2 | | 89 | 010 | +23.35 | 011 | 010 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.11 2 | | 66 | 012 | +26.30 | 013 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.11 2 | | 70 | 012 | +27.34 | 013 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.11 2 | | 71 | 012 | +15.42 | 013 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.11 2 | | 83 | 011 | +17.55 | 012 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.11 2 | | 86 | 011 | +21.96 | 012 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.11 2 | | 103 | 011 | +25.07 | 012 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.11 2 | | 111 | 012 | +5.54 | 013 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.11 2 | | 125 | 013 | +1.64 | 013 | 013 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.12 2 | | 62 | 012 | +22.23 | 013 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.12 2 | | 67 | 010 | +17.10 | 011 | 010 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.12 2 | | 68 | 013 | +11.32 | 013 | 013 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.12 2 | | 83 | 012 | +33.30 | 013 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.12 2 | | 99 | 010 | +22.16 | 011 | 010 | UTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 0.12 2 | | 118 | 012 | +24.30 | 013 | 012 | UTE | 25 460 | |

ATTACHMENT A-3 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | *TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|-------|-----|-----|----------|------------------|---------|-----|-------|--------|----------|
| MRPC Special Int. | | | | SAI | 0.13 | 2 | 91 | 011 | +22.94 | 012 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | | SAI | 0.14 | 2 | 72 | 013 | +14.54 | 013 | 013 | UTE | 25 460 | |
| MRPC Special Int. | | | | SAI | 0.14 | 2 | 73 | 013 | +12.40 | 013 | 013 | UTE | 25 460 | |
| MRPC Special Int. | | | | SAI | 0.14 | 2 | 86 | 010 | +27.89 | 011 | 010 | UTE | 25 460 | |
| MRPC Special Int. | | | | SAI | 0.15 | 2 | 75 | 013 | +9.98 | 013 | 013 | UTE | 25 460 | |
| MRPC Special Int. | | | | SAI | 0.15 | 2 | 89 | 012 | +1.16 | 013 | 012 | UTE | 25 460 | |
| MRPC Special Int. | 144 | 44 | | SAI | 0.07 | 2 | 70 | 011 | -3.14 | 011 | 011 | UTE | 25 460 | |
| MRPC Special Int. | 144 | 46 | | VOL | 0.15 | 2 | 77 | 013 | +0.84 | 013 | 013 | UTE | 25 460 | |
| MRPC Special Int. | 144 | 49 | WAR | 6 | 0.56 | P 3 | 105 | 008 | -0.51 | 008 | 008 | UTE | 25 460 | WAR |
| MRPC Special Int. | 144 | 53 | | VOL | 0.14 | 2 | 129 | 008 | +0.34 | 008 | 008 | UTE | 25 460 | |
| MRPC Special Int. | | | | VOL | 0.27 | 2 | 113 | 008 | -0.53 | 008 | 008 | UTE | 25 460 | |
| MRPC Special Int. | 145 | 1 | WAR | 12 | 0.51 | P 3 | 0 | 013 | -0.76 | 013 | 013 | LTE | 31 460 | WAR |
| MRPC Special Int. | 145 | 16 | WAR | 7 | 0.34 | P 3 | 0 | 008 | -0.52 | 008 | 008 | LTE | 31 460 | WAR |
| HL ROLL TRANSITION | 145 | 30 | | MAI | 1.37 | 2 | 16 | UTE | -0.20 | UTE | UTE | UTE | 26 460 | |
| MRPC Special Int. | 145 | 36 | | VOL | 0.29 | 2 | 36 | 014 | -0.33 | 014 | 014 | UTE | 25 460 | |
| MRPC Special Int. | 145 | 47 | WAR | 14 | 1.18 | P 3 | 52 | 008 | +0.68 | 008 | 008 | UTE | 25 460 | WAR |
| MRPC Special Int. | 145 | 49 | | SAI | 0.07 | 2 | 77 | 012 | +5.37 | 012 | 012 | UTE | 25 460 | |
| MRPC Special Int. | 145 | 53 | | SAI | 0.08 | 2 | 60 | 011 | +5.06 | 011 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | | SAI | 0.11 | 2 | 54 | 011 | +19.06 | 011 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | | SAI | 0.11 | 2 | 82 | 011 | +26.53 | 011 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | | SAI | 0.13 | 2 | 35 | 011 | +20.22 | 011 | 011 | UTE | 25 460 | |
| MRPC Special Int. | 146 | 14 | WAR | 10 | 0.51 | P 3 | 0 | 008 | -0.56 | 008 | 008 | LTE | 31 460 | WAR |
| MRPC Special Int. | 146 | 22 | | VOL | 0.09 | 2 | 0 | 009 | +8.21 | 009 | 009 | LTE | 31 460 | |
| MRPC Special Int. | | | | VOL | 0.12 | 2 | 0 | 008 | +3.69 | 008 | 008 | LTE | 31 460 | |
| MRPC Special Int. | 146 | 29 | WAR | 9 | 2.98 | P 3 | 76 | 008 | -0.84 | 008 | 008 | UTE | 25 460 | WAR |
| MRPC Special Int. | 146 | 43 | WAR | 8 | 0.73 | P 3 | 79 | 009 | +0.57 | 009 | 009 | UTE | 25 460 | WAR |
| MRPC Special Int. | 147 | 5 | | VOL | 0.16 | 2 | 0 | 015 | +4.20 | 015 | 015 | LTE | 31 460 | |
| MRPC Special Int. | 147 | 11 | | VOL | 0.35 | 2 | 0 | 008 | +0.74 | 008 | 008 | LTE | 31 460 | |
| MRPC Special Int. | 147 | 12 | | VOL | 0.31 | 2 | 128 | 010 | -0.68 | 010 | 010 | LTE | 31 460 | |
| MRPC Special Int. | 148 | 10 | WAR | 4 | 0.17 | P 3 | 0 | 008 | +0.66 | 008 | 008 | LTE | 31 460 | WAR |
| MRPC Special Int. | 148 | 23 | | SAI | 0.19 | 2 | 85 | 012 | -10.13 | 012 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | | SAI | 0.31 | 2 | 80 | 012 | -10.13 | 012 | 012 | UTE | 25 460 | |
| MRPC Special Int. | 149 | 8 | WAR | 12 | 0.45 | P 3 | 0 | 009 | +0.64 | 009 | 009 | LTE | 67 460 | WAR |
| MRPC Special Int. | 149 | 16 | | VOL | 0.50 | 2 | 120 | 010 | +0.66 | 010 | 010 | LTE | 35 460 | |
| MRPC Special Int. | 149 | 25 | | VOL | 0.39 | 2 | 129 | 010 | +14.50 | 010 | 010 | UTE | 25 460 | |
| MRPC Special Int. | | | | VOL | 0.68 | 2 | 126 | 010 | +0.13 | 010 | 010 | UTE | 25 460 | |
| MRPC Special Int. | | | | VOL | 0.92 | 2 | 128 | 010 | +0.38 | 010 | 010 | UTE | 25 460 | |
| MRPC Special Int. | 149 | 29 | | SAI | 0.10 | 2 | 109 | 015 | -18.84 | 015 | 015 | UTE | 25 460 | |
| MRPC Special Int. | | | | SAI | 0.11 | 2 | 95 | 015 | -7.39 | 015 | 015 | UTE | 25 460 | |
| MRPC Special Int. | | | | SAI | 0.12 | 2 | 78 | 013 | +19.23 | 013 | 013 | UTE | 25 460 | |
| MRPC Special Int. | | | | SAI | 0.15 | 2 | 107 | 012 | +20.67 | 012 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | | SAI | 0.17 | 2 | 117 | 015 | -24.31 | 015 | 015 | UTE | 25 460 | |
| MRPC Special Int. | | | | SAI | 0.18 | 2 | 70 | 011 | +18.64 | 011 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | | SAI | 0.19 | 2 | 87 | 012 | +26.30 | 012 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | | SAI | 0.20 | 2 | 95 | 012 | +18.92 | 012 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | | SAI | 0.21 | 2 | 79 | 012 | +6.17 | 012 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | | MAI | 0.20 | 2 | 104 | 012 | +9.03 to +12.84 | 012 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | | MAI | 0.30 | 2 | 92 | 013 | +12.26 to +18.25 | 013 | 013 | UTE | 25 460 | |
| MRPC Special Int. | | | | SAI | 0.15 | 2 | 71 | 012 | +12.90 to +15.21 | 012 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | | SAI | 0.17 | 2 | 79 | 012 | -8.75 to -6.41 | 012 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | | SAI | 0.24 | 2 | 94 | 013 | +20.83 to +21.39 | 013 | 013 | UTE | 25 460 | |
| MRPC Special Int. | | | | SAI | 0.28 | 2 | 70 | 011 | +20.23 to +23.19 | 011 | 011 | UTE | 25 460 | |
| MRPC Special Int. | | | | SAI | 0.29 | 2 | 82 | 012 | +18.54 to +23.56 | 012 | 012 | UTE | 25 460 | |
| MRPC Special Int. | | | | SAI | 0.31 | 2 | 92 | 013 | +21.76 to +25.46 | 013 | 013 | UTE | 25 460 | |
| MRPC Special Int. | 150 | 3 | | VOL | 0.13 | 2 | 59 | 015 | +17.80 | 015 | 015 | LTE | 67 460 | |
| MRPC Special Int. | 150 | 8 | WAR | 18 | 0.97 | P 3 | 0 | 010 | +0.77 | 010 | 010 | LTE | 35 460 | WAR |
| MRPC Special Int. | 150 | 9 | WAR | 10 | 0.46 | P 3 | 0 | 010 | -0.63 | 010 | 010 | LTE | 35 460 | WAR |
| MRPC Special Int. | 150 | 12 | WAR | 14 | 0.70 | P 3 | 0 | 010 | +0.58 | 010 | 010 | LTE | 35 460 | WAR |
| MRPC Special Int. | | | | WAR | 0.92 | P 3 | 0 | 010 | -0.74 | 010 | 010 | LTE | 35 460 | WAR |
| MRPC Special Int. | 150 | 14 | | VOL | 0.56 | 2 | 75 | 006 | +0.69 | 006 | 006 | LTE | 87 460 | |
| MRPC Special Int. | | | | WAR | 0.62 | P 3 | 0 | 010 | +0.56 | 010 | 010 | LTE | 35 460 | WAR |
| MRPC Special Int. | 150 | 19 | | VOL | 0.79 | 2 | 130 | 011 | -0.22 | 011 | 011 | UTE | 25 460 | |
| MRPC Special Int. | 151 | 3 | WAR | 11 | 0.48 | P 3 | 0 | 012 | -0.66 | 012 | 012 | LTE | 35 460 | WAR |
| MRPC Special Int. | 151 | 5 | WAR | 9 | 0.42 | P 3 | 0 | 013 | +0.57 | 013 | 013 | LTE | 35 460 | WAR |
| MRPC Special Int. | | | | WAR | 0.71 | P 3 | 0 | 012 | -0.81 | 012 | 012 | LTE | 35 460 | WAR |

Oconee Nuclear Station - Unit Three

S/G A

04/00 RFO

C/L Tubesheet, HL ROLL TRANSITION, MRPC C/L Plugs, MRPC H/L Plugs, MRPC Lane & Wedge, MRPC Special Int., SLEEVE ROLL +POINT

Page 18 of 18

ATTACHMENT A-3 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-------------------|-----|------|-----|-----|-------|------|-----|----------|---------|---------|-----|-------|--------|----------|
| MRPC Special Int. | | | | WAR | 24 | 1.40 | P 3 | 0 013 | -0.72 | 013 | 013 | LTE | 35 460 | WAR |
| MRPC Special Int. | 151 | 16 | | VOL | | 0.62 | 2 | 111 014 | +0.58 | 014 | 014 | UTE | 25 460 | |
| MRPC Special Int. | | | | VOL | | 0.64 | 2 | 58 014 | -0.57 | 014 | 014 | UTE | 25 460 | |
| MRPC Special Int. | | | | VOL | | 0.95 | 2 | 88 013 | +4.70 | 013 | 013 | UTE | 25 460 | |

Total Indications Found = 1109

Total Tubes Found = 792

ATTACHMENT A-4 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|-------|-----|-----|----------|------------------|---------|-----|--------|-------|----------|
| MRPC Special Int. | 1 | 1 | WAR | 7 | 0.52 | P 3 | 0 | 010 | -0.31 | 010 | LTE | 40 460 | WAR | |
| MRPC Special Int. | 2 | 9 | VOL | | 0.20 | 2 | 72 | 010 | -3.26 to -0.90 | 010 | LTE | 40 460 | | |
| MRPC Special Int. | 3 | 1 | VOL | | 0.18 | 2 | 114 | UTS | +0.14 | UTS | LTE | 40 460 | | |
| MRPC Special Int. | 3 | 2 | SAI | | 0.20 | 2 | 115 | 015 | -1.60 | 015 | LTE | 40 460 | | |
| MRPC Special Int. | 3 | 9 | VOL | | 0.11 | 2 | 122 | 015 | +0.56 | 015 | LTE | 40 460 | | |
| MRPC Special Int. | 3 | 11 | VOL | | 0.20 | 2 | 107 | 010 | -2.31 | 010 | LTE | 40 460 | | |
| MRPC Special Int. | 3 | 22 | VOL | | 0.16 | 2 | 75 | 015 | +18.84 | 015 | UTE | 45 460 | | |
| MRPC Special Int. | 4 | 2 | WAR | 13 | 0.98 | P 3 | 0 | 011 | -0.77 | 011 | LTE | 40 460 | WAR | |
| MRPC Special Int. | 4 | 8 | VOL | | 0.38 | 2 | 33 | 010 | -9.50 | 010 | LTE | 40 460 | | |
| MRPC Special Int. | | | VOL | | 0.25 | 2 | 94 | 010 | -4.61 to -1.81 | 010 | LTE | 40 460 | | |
| MRPC Special Int. | 4 | 9 | VOL | | 0.20 | 2 | 88 | 010 | -2.20 to -0.88 | 010 | LTE | 40 460 | | |
| MRPC Special Int. | 4 | 10 | VOL | | 0.19 | 2 | 48 | 010 | -1.40 | 010 | LTE | 40 460 | | |
| MRPC Special Int. | 4 | 35 | WAR | 11 | 0.68 | P 3 | 0 | 010 | +0.71 | 010 | UTE | 45 460 | WAR | |
| MRPC Special Int. | 5 | 5 | VOL | | 0.11 | 2 | 29 | 005 | -7.16 | 005 | LTE | 40 460 | | |
| MRPC Special Int. | 5 | 6 | VOL | | 0.27 | 2 | 73 | 010 | -1.24 | 010 | LTE | 40 460 | | |
| MRPC Special Int. | | | WAR | 9 | 0.64 | P 3 | 0 | 014 | -0.31 | 014 | LTE | 40 460 | WAR | |
| MRPC Special Int. | 5 | 9 | VOL | | 0.38 | 2 | 83 | 010 | -1.72 to -0.81 | 010 | LTE | 40 460 | | |
| MRPC Special Int. | 5 | 23 | WAR | 13 | 0.93 | P 3 | 0 | 009 | +0.56 | 009 | LTE | 40 460 | WAR | |
| MRPC Special Int. | 5 | 31 | VOL | | 0.34 | 2 | 131 | 008 | +0.80 | 008 | UTE | 45 460 | | |
| MRPC Special Int. | 5 | 35 | VOL | | 0.18 | 2 | 75 | 009 | +0.69 | 009 | UTE | 45 460 | | |
| MRPC Special Int. | 5 | 42 | WAR | 10 | 0.67 | P 3 | 0 | 010 | +0.60 | 010 | UTE | 45 460 | WAR | |
| MRPC Special Int. | 6 | 5 | VOL | | 0.14 | 2 | 93 | 010 | -2.36 to -1.71 | 010 | LTE | 40 460 | | |
| MRPC Special Int. | 6 | 6 | VOL | | 0.41 | 2 | 82 | 010 | -2.44 | 010 | LTE | 40 460 | | |
| MRPC Special Int. | 6 | 10 | VOL | | 0.14 | 2 | 78 | 014 | +1.18 | 014 | LTE | 40 460 | | |
| MRPC Special Int. | | | VOL | | 0.16 | 2 | 87 | 014 | +1.29 | 014 | LTE | 40 460 | | |
| MRPC Special Int. | 6 | 19 | VOL | | 0.27 | 2 | 129 | 008 | -0.81 | 008 | LTE | 40 460 | | |
| MRPC Special Int. | 6 | 45 | WAR | 5 | 0.31 | P 3 | 0 | 011 | -0.73 | 011 | UTE | 45 460 | WAR | |
| MRPC Special Int. | 7 | 5 | VOL | | 0.12 | 2 | 142 | 004 | +15.61 | 004 | LTE | 40 460 | | |
| MRPC Special Int. | 7 | 8 | VOL | | 0.25 | 2 | 94 | 010 | +3.68 to +5.74 | 010 | LTE | 40 460 | | |
| MRPC Special Int. | 7 | 14 | VOL | | 0.21 | 2 | 101 | 010 | +4.77 to +6.62 | 010 | LTE | 40 460 | | |
| MRPC Special Int. | 7 | 16 | WAR | 15 | 1.10 | P 3 | 0 | 009 | +0.66 | 009 | LTE | 40 460 | WAR | |
| MRPC Special Int. | 7 | 19 | VOL | | 0.26 | 2 | 149 | 010 | -0.20 | 010 | LTE | 40 460 | | |
| MRPC Special Int. | 7 | 51 | VOL | | 0.11 | 2 | 60 | 001 | -10.41 | 001 | UTE | 45 460 | | |
| MRPC Special Int. | 8 | 5 | VOL | | 0.14 | 2 | 84 | 014 | +0.84 | 014 | LTE | 40 460 | | |
| MRPC Special Int. | | | VOL | | 0.15 | 2 | 98 | 014 | +1.21 | 014 | LTE | 40 460 | | |
| MRPC Special Int. | 8 | 10 | WAR | 10 | 0.57 | P 3 | 0 | 010 | -0.76 | 010 | LTE | 40 460 | WAR | |
| MRPC Special Int. | 8 | 13 | VOL | | 0.21 | 2 | 159 | 014 | +0.12 | 014 | LTE | 40 460 | | |
| MRPC Special Int. | 8 | 19 | WAR | 9 | 0.64 | P 3 | 0 | 010 | -0.77 | 010 | LTE | 40 460 | WAR | |
| MRPC Special Int. | 8 | 21 | VOL | | 0.20 | 2 | 52 | 006 | +15.78 | 006 | LTE | 40 460 | | |
| HL ROLL TRANSITION | 8 | 34 | VOL | | 0.14 | 2 | 110 | UTE | -2.81 | UTE | UTE | 67 460 | | |
| MRPC Special Int. | 8 | 47 | WAR | 11 | 0.68 | P 3 | 0 | 008 | +0.78 | 008 | UTE | 45 460 | WAR | |
| MRPC Special Int. | 8 | 57 | SAI | | 0.46 | 2 | 68 | 015 | +2.31 | 015 | UTE | 45 460 | | |
| MRPC Special Int. | | | VOL | | 0.11 | 2 | 104 | 015 | +1.64 | 015 | UTE | 45 460 | | |
| MRPC Special Int. | | | WAR | 5 | 0.29 | P 3 | 0 | 012 | -0.02 | 012 | UTE | 45 460 | WAR | |
| MRPC Special Int. | 9 | 23 | VOL | | 0.40 | 2 | 134 | 009 | -0.67 | 009 | LTE | 44 460 | | |
| MRPC Special Int. | 9 | 24 | VOL | | 0.29 | 2 | 149 | 010 | +0.45 | 010 | LTE | 44 460 | | |
| MRPC Special Int. | 9 | 57 | VOL | | 0.20 | 2 | 38 | 002 | +23.79 | 002 | UTE | 45 460 | | |
| MRPC Special Int. | 9 | 58 | SAI | | 0.09 | 2 | 98 | 015 | +2.39 | 015 | UTE | 45 460 | | |
| MRPC Special Int. | 10 | 2 | WAR | 6 | 0.34 | P 3 | 54 | 011 | -0.77 | 011 | LTE | 44 460 | WAR | |
| MRPC Special Int. | 10 | 7 | WAR | 7 | 0.38 | P 3 | 110 | 009 | +0.68 | 009 | LTE | 44 460 | WAR | |
| MRPC Special Int. | 10 | 9 | WAR | 7 | 0.42 | P 3 | 74 | 009 | -0.72 | 009 | LTE | 44 460 | WAR | |
| MRPC Special Int. | 10 | 25 | VOL | | 0.19 | 2 | 120 | 009 | +0.78 | 009 | LTE | 44 460 | | |
| MRPC Special Int. | 10 | 51 | VOL | | 0.28 | 2 | 92 | 011 | -0.71 | 011 | UTE | 45 460 | | |
| MRPC Special Int. | 10 | 59 | VOL | | 0.30 | 2 | 85 | 009 | +24.35 | 009 | UTE | 45 460 | | |
| MRPC Special Int. | 10 | 65 | VOL | | 0.13 | 2 | 90 | 014 | +3.51 | 014 | LTE | 63 460 | | |
| MRPC Special Int. | 11 | 11 | VOL | | 0.39 | 2 | 143 | 009 | -0.70 | 009 | LTE | 44 460 | | |
| MRPC Special Int. | | | WAR | 4 | 0.22 | P 3 | 87 | 010 | -0.76 | 010 | LTE | 44 460 | WAR | |
| MRPC Special Int. | 11 | 13 | VOL | | 0.23 | 2 | 78 | 008 | +0.80 | 008 | LTE | 44 460 | | |
| MRPC Special Int. | | | VOL | | 0.32 | 2 | 125 | 008 | -0.75 | 008 | LTE | 44 460 | | |
| MRPC Special Int. | 11 | 20 | VOL | | 0.16 | 2 | 108 | 008 | +6.22 | 008 | LTE | 44 460 | | |
| MRPC Special Int. | 11 | 60 | VOL | | 0.29 | 2 | 100 | 009 | +18.29 to +28.41 | 009 | UTE | 45 460 | | |
| MRPC Special Int. | 11 | 65 | VOL | | 0.61 | 2 | 90 | 010 | -1.19 | 010 | UTE | 45 460 | | |
| MRPC Special Int. | 11 | 67 | VOL | | 0.79 | 1 | 85 | 014 | +3.25 | 014 | UTE | 28 460 | | |
| MRPC Special Int. | 12 | 2 | VOL | | 0.24 | 2 | 91 | 010 | -1.40 | 010 | UTE | 52 460 | | |
| MRPC Special Int. | | | WAR | 7 | 0.38 | P 3 | 31 | 010 | +0.62 | 010 | UTE | 52 460 | WAR | |

ATTACHMENT A-4 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|-------|-----|-----|----------|------------------|---------|-----|-------|--------|----------|
| MRPC Special Int. | 12 | 14 | VOL | | 0.31 | 2 | 112 | 007 | -0.90 | 007 | 007 | LTE | 44 460 | |
| MRPC Special Int. | 12 | 20 | VOL | | 0.27 | 2 | 96 | 009 | +0.46 | 009 | 009 | LTE | 44 460 | |
| MRPC Special Int. | 12 | 33 | WAR | 6 | 0.36 | P 3 | 61 | 011 | -0.73 | 011 | 011 | LTE | 44 460 | WAR |
| MRPC Special Int. | 12 | 65 | VOL | | 0.27 | 2 | 57 | 010 | -1.56 | 010 | 010 | UTE | 45 460 | |
| MRPC Special Int. | 12 | 68 | VOL | | 0.31 | 2 | 30 | 009 | -0.63 | 009 | 009 | UTE | 28 460 | |
| MRPC Special Int. | 12 | 70 | VOL | | 0.59 | 1 | 40 | 012 | +5.26 | 012 | 012 | UTE | 28 460 | |
| MRPC Special Int. | 12 | 71 | VOL | | 0.15 | 2 | 106 | 012 | +1.17 | 012 | 012 | LTE | 63 460 | |
| MRPC Special Int. | | | VOL | | 0.34 | 1 | 89 | 011 | +12.16 | 011 | 011 | UTE | 28 460 | |
| MRPC Special Int. | 13 | 4 | VOL | | 0.16 | 2 | 45 | 010 | -1.86 | 010 | 010 | UTE | 52 460 | |
| MRPC Special Int. | | | VOL | | 0.20 | 2 | 54 | 010 | -2.07 | 010 | 010 | UTE | 52 460 | |
| MRPC Special Int. | 13 | 5 | WAR | 12 | 0.72 | P 3 | 71 | 010 | -0.56 | 010 | 010 | UTE | 52 460 | WAR |
| MRPC Special Int. | 13 | 18 | VOL | | 0.34 | 2 | 127 | 007 | -0.76 | 007 | 007 | LTE | 44 460 | |
| MRPC Special Int. | 13 | 19 | VOL | | 0.40 | 2 | 115 | 007 | -0.86 | 007 | 007 | LTE | 44 460 | |
| MRPC Special Int. | 13 | 20 | VOL | | 0.29 | 2 | 103 | 007 | -0.61 | 007 | 007 | LTE | 44 460 | |
| MRPC Special Int. | 13 | 65 | VOL | | 0.15 | 2 | 26 | 009 | +25.17 | 009 | 009 | UTE | 45 460 | |
| MRPC Special Int. | | | VOL | | 0.52 | 2 | 73 | 009 | +24.65 | 009 | 009 | UTE | 45 460 | |
| MRPC Special Int. | 13 | 67 | VOL | | 0.19 | 2 | 120 | 010 | -4.61 | 010 | 010 | UTE | 45 460 | |
| MRPC Special Int. | 13 | 71 | VOL | | 1.09 | 1 | 100 | 010 | -2.75 to -1.25 | 010 | 010 | UTE | 28 460 | |
| MRPC Special Int. | 13 | 74 | VOL | | 0.20 | 2 | 148 | 010 | -0.29 | 010 | 010 | LTE | 63 460 | |
| MRPC Special Int. | | | WAR | 7 | 0.36 | P 3 | 0 | 010 | +0.42 | 010 | 010 | LTE | 63 460 | WAR |
| MRPC Special Int. | 14 | 55 | VOL | | 0.27 | 2 | 105 | 011 | -0.69 | 011 | 011 | UTE | 45 460 | |
| MRPC Special Int. | 14 | 67 | VOL | | 0.27 | 2 | 92 | 009 | +21.42 to +32.37 | 009 | 009 | UTE | 45 460 | |
| MRPC Special Int. | 14 | 75 | VOL | | 0.14 | 2 | 92 | 015 | -4.21 | 015 | 015 | LTE | 63 460 | |
| MRPC Special Int. | | | VOL | | 0.44 | 2 | 128 | 010 | +0.04 | 010 | 010 | LTE | 63 460 | |
| HL ROLL TRANSITION | 15 | 5 | SAI | | 0.47 | 2 | 22 | UTE | -0.76 | UTE | UTE | UTE | 9 460 | |
| MRPC Special Int. | 15 | 64 | VOL | | 0.32 | 2 | 96 | 009 | +0.68 | 009 | 009 | UTE | 45 460 | |
| MRPC Special Int. | 15 | 67 | VOL | | 0.34 | 2 | 84 | 009 | +10.15 to +27.55 | 009 | 009 | UTE | 45 460 | |
| MRPC Special Int. | 15 | 69 | VOL | | 0.18 | 2 | 142 | 010 | -18.25 to -5.84 | 010 | 010 | UTE | 73 460 | |
| MRPC Special Int. | 15 | 71 | VOL | | 0.12 | 2 | 86 | 010 | -1.20 | 010 | 010 | UTE | 45 460 | |
| MRPC Special Int. | 15 | 74 | VOL | | 0.31 | 2 | 85 | 010 | -1.85 | 010 | 010 | UTE | 72 460 | |
| MRPC Special Int. | 15 | 78 | VOL | | 0.47 | 2 | 223 | 010 | +0.47 | 010 | 010 | LTE | 63 460 | |
| MRPC Special Int. | 16 | 5 | VOL | | 0.30 | 2 | 84 | 009 | +10.57 to +16.50 | 009 | 009 | UTE | 52 460 | |
| HL ROLL TRANSITION | 16 | 16 | VOL | | 0.18 | 2 | 97 | UTE | -2.86 | UTE | UTE | UTE | 29 460 | |
| MRPC Special Int. | 16 | 21 | VOL | | 0.11 | 2 | 58 | 013 | -9.64 | 013 | 013 | LTE | 44 460 | |
| MRPC Special Int. | 16 | 42 | VOL | | 0.11 | 2 | 54 | 014 | +23.93 | 014 | 014 | UTE | 45 460 | |
| HL ROLL TRANSITION | 16 | 48 | VOL | | 0.34 | 1 | 111 | UTE | -2.95 | UTE | UTE | UTE | 59 460 | |
| MRPC Special Int. | 16 | 66 | VOL | | 0.13 | 2 | 167 | 009 | +0.70 | 009 | 009 | UTE | 45 460 | |
| MRPC Special Int. | 16 | 72 | VOL | | 0.21 | 2 | 103 | 009 | +24.48 to +32.30 | 009 | 009 | UTE | 45 460 | |
| MRPC Special Int. | 16 | 81 | VOL | | 0.25 | 2 | 62 | 015 | -3.21 to -2.90 | 015 | 015 | LTE | 63 460 | |
| MRPC Special Int. | 17 | 53 | VOL | | 0.28 | 2 | 113 | 011 | -0.70 | 011 | 011 | UTE | 45 460 | |
| MRPC Special Int. | 17 | 72 | VOL | | 0.18 | 2 | 111 | 009 | +20.24 to +28.11 | 009 | 009 | UTE | 45 460 | |
| MRPC Special Int. | 17 | 74 | WAR | 4 | 0.15 | P 3 | 161 | 009 | +0.70 | 009 | 009 | UTE | 34 460 | WAR |
| MRPC Special Int. | 17 | 75 | WAR | 6 | 0.24 | P 3 | 151 | 008 | -0.63 | 008 | 008 | UTE | 34 460 | WAR |
| MRPC Special Int. | 17 | 77 | VOL | | 0.35 | 2 | 108 | 009 | +0.63 | 009 | 009 | UTE | 28 460 | |
| MRPC Special Int. | 18 | 2 | WAR | 8 | 0.48 | P 3 | 56 | 014 | +0.60 | 014 | 014 | UTE | 52 460 | WAR |
| MRPC Special Int. | 18 | 4 | VOL | | 0.23 | 2 | 93 | 009 | +16.29 | 009 | 009 | UTE | 52 460 | |
| HL ROLL TRANSITION | 18 | 7 | SCI | | 0.62 | P 1 | 22 | UTE | -0.45 | UTE | UTE | UTE | 9 460 | |
| MRPC Special Int. | 18 | 56 | VOL | | 0.10 | 2 | 64 | 003 | +2.51 | 003 | 003 | UTE | 45 460 | |
| MRPC Special Int. | 18 | 62 | VOL | | 0.28 | 2 | 71 | 009 | +10.99 | 009 | 009 | UTE | 45 460 | |
| MRPC Special Int. | | | VOL | | 0.31 | 2 | 84 | 009 | +7.59 | 009 | 009 | UTE | 45 460 | |
| MRPC Special Int. | 18 | 66 | VOL | | 0.30 | 2 | 55 | 013 | +24.23 | 013 | 013 | UTE | 45 460 | |
| MRPC Special Int. | 18 | 71 | VOL | | 0.50 | 2 | 122 | 008 | +0.62 | 008 | 008 | UTE | 45 460 | |
| MRPC Special Int. | 18 | 75 | VOL | | 0.11 | 2 | 158 | 006 | -4.55 | 006 | 006 | UTE | 28 460 | |
| MRPC Special Int. | 18 | 76 | VOL | | 0.42 | 2 | 109 | 010 | -18.83 to -9.53 | 010 | 010 | UTE | 28 460 | |
| MRPC Special Int. | 18 | 79 | VOL | | 0.50 | 2 | 70 | 010 | +0.13 | 010 | 010 | UTE | 28 460 | |
| MRPC Special Int. | | | VOL | | 0.36 | 2 | 86 | 010 | -15.47 to -10.95 | 010 | 010 | UTE | 28 460 | |
| MRPC Special Int. | 18 | 81 | VOL | | 0.57 | 2 | 114 | 009 | -0.67 | 009 | 009 | UTE | 28 460 | |
| MRPC Special Int. | 18 | 83 | VOL | | 0.14 | 2 | 70 | 010 | +9.16 | 010 | 010 | UTE | 28 460 | |
| MRPC Special Int. | 19 | 5 | WAR | 9 | 0.49 | P 3 | 99 | 009 | +0.50 | 009 | 009 | UTE | 52 460 | WAR |
| MRPC Special Int. | 19 | 11 | VOL | | 0.31 | 2 | 133 | 007 | -0.72 | 007 | 007 | UTE | 52 460 | |
| MRPC Special Int. | 19 | 16 | VOL | | 0.24 | 2 | 113 | UTS | +14.33 | UTS | UTS | LTE | 44 460 | |
| MRPC Special Int. | 19 | 67 | VOL | | 0.25 | 2 | 133 | 014 | +0.54 | 014 | 014 | UTE | 45 460 | |
| MRPC Special Int. | 19 | 71 | VOL | | 0.23 | 2 | 63 | 013 | +0.83 | 013 | 013 | UTE | 45 460 | |
| MRPC Special Int. | 19 | 78 | VOL | | 0.32 | 2 | 71 | 008 | -0.64 | 008 | 008 | UTE | 28 460 | |
| MRPC Special Int. | 19 | 79 | WAR | 9 | 0.46 | P 3 | 0 | 008 | -0.60 | 008 | 008 | LTE | 63 460 | WAR |

ATTACHMENT A-4 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | *TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|----------|-----|-----|---------------|------------------|---------|-----|--------|--------|----------|
| MRPC Special Int. | | | | | VOL | | | 0.48 2 78 009 | +21.45 to +26.10 | 009 | 009 | LTE | 63 460 | |
| MRPC Special Int. | 19 | 82 | WAR | 25 | 1.43 P 3 | 0 | 010 | +0.55 | 010 | 010 | LTE | 63 460 | WAR | |
| MRPC Special Int. | 19 | 86 | WAR | 10 | 0.52 P 3 | 82 | 015 | +0.69 | 015 | 015 | LTE | 63 460 | WAR | |
| HL ROLL TRANSITION | 20 | 7 | SCI | | 3.80 P 1 | 29 | UTE | -0.11 | UTE | UTE | UTE | 9 460 | | |
| MRPC Special Int. | 20 | 16 | VOL | | 0.28 2 | 95 | 011 | -7.07 | 011 | 011 | LTE | 44 460 | | |
| MRPC Special Int. | 20 | 73 | VOL | | 0.41 2 | 146 | 008 | +0.71 | 008 | 008 | UTE | 28 460 | | |
| MRPC Special Int. | 20 | 75 | VOL | | 0.34 2 | 134 | 008 | +0.61 | 008 | 008 | UTE | 28 460 | | |
| MRPC Special Int. | 20 | 77 | VOL | | 0.33 2 | 97 | 008 | -0.65 | 008 | 008 | UTE | 28 460 | | |
| MRPC Special Int. | 20 | 78 | VOL | | 0.27 2 | 85 | 008 | -0.69 | 008 | 008 | UTE | 28 460 | | |
| MRPC Special Int. | | | WAR | 11 | 0.55 P 3 | 0 | 009 | +0.61 | 009 | 009 | LTE | 63 460 | WAR | |
| MRPC Special Int. | 20 | 79 | VOL | | 0.38 2 | 95 | 008 | +0.67 | 008 | 008 | UTE | 28 460 | | |
| MRPC Special Int. | 20 | 80 | VOL | | 0.51 2 | 106 | 009 | -0.72 | 009 | 009 | UTE | 28 460 | | |
| MRPC Special Int. | 20 | 81 | VOL | | 0.50 2 | 146 | 009 | +0.70 | 009 | 009 | UTE | 28 460 | | |
| MRPC Special Int. | 21 | 15 | WAR | 5 | 0.29 P 3 | 70 | 007 | -0.73 | 007 | 007 | LTE | 44 460 | WAR | |
| MRPC Special Int. | 21 | 72 | WAR | 6 | 0.40 P 3 | 0 | 011 | -0.64 | 011 | 011 | UTE | 45 460 | WAR | |
| MRPC Special Int. | 21 | 77 | WAR | 10 | 0.64 P 3 | 0 | 011 | -0.65 | 011 | 011 | UTE | 45 460 | WAR | |
| MRPC Special Int. | 21 | 78 | WAR | 5 | 0.20 P 3 | 18 | 009 | +0.71 | 009 | 009 | UTE | 34 460 | WAR | |
| HL ROLL TRANSITION | 21 | 83 | VOL | | 0.39 P 1 | 137 | UTE | -3.91 | UTE | UTE | UTE | 89 460 | | |
| HL ROLL TRANSITION | | | VOL | | 0.44 P 1 | 60 | UTE | -3.25 | UTE | UTS | UTE | 89 460 | | |
| MRPC Special Int. | 21 | 84 | WAR | 16 | 0.71 P 3 | 0 | 008 | -0.65 | 008 | 008 | UTE | 34 460 | WAR | |
| MRPC Special Int. | 21 | 85 | VOL | | 0.40 2 | 136 | 009 | +0.67 | 009 | 009 | UTE | 34 460 | | |
| MRPC Special Int. | 22 | 70 | VOL | | 0.34 2 | 79 | 011 | -0.74 | 011 | 011 | UTE | 45 460 | | |
| MRPC Special Int. | 22 | 86 | VOL | | 0.38 2 | 67 | 011 | -0.69 | 011 | 011 | UTE | 34 460 | | |
| MRPC Special Int. | 22 | 90 | VOL | | 0.30 2 | 125 | 009 | -0.72 | 009 | 009 | UTE | 34 460 | | |
| MRPC Special Int. | | | VOL | | 0.33 2 | 115 | 009 | +0.64 | 009 | 009 | UTE | 34 460 | | |
| MRPC Special Int. | 23 | 93 | VOL | | 0.36 2 | 89 | 006 | +1.67 | 006 | 006 | UTE | 34 460 | | |
| HL ROLL TRANSITION | 24 | 3 | SCI | | 9.00 P 1 | 21 | UTE | -0.11 | UTE | UTE | UTE | 9 460 | | |
| MRPC Special Int. | 24 | 19 | VOL | | 0.29 2 | 129 | 007 | -0.53 | 007 | 007 | LTE | 44 460 | | |
| MRPC Special Int. | 24 | 37 | VOL | | 0.21 2 | 84 | 014 | +0.96 | 014 | 014 | LTE | 44 460 | | |
| MRPC Special Int. | 24 | 74 | VOL | | 0.10 2 | 0 | 014 | +21.88 | 014 | 014 | UTE | 41 460 | | |
| MRPC Special Int. | 25 | 3 | VOL | | 0.33 2 | 142 | 009 | +0.65 | 009 | 009 | LTE | 54 460 | | |
| MRPC Special Int. | 25 | 4 | WAR | 12 | 0.43 P 3 | 26 | 009 | +0.68 | 009 | 009 | LTE | 54 460 | WAR | |
| MRPC Special Int. | 25 | 24 | VOL | | 0.10 2 | 41 | 012 | +3.51 | 012 | 012 | LTE | 44 460 | | |
| MRPC Special Int. | 25 | 69 | VOL | | 0.13 2 | 0 | 004 | +8.88 | 004 | 004 | UTE | 41 460 | | |
| MRPC Special Int. | 26 | 5 | VOL | | 0.19 2 | 91 | 008 | -0.65 | 008 | 008 | LTE | 54 460 | | |
| MRPC Special Int. | 26 | 15 | VOL | | 0.16 2 | 52 | 001 | +1.77 | 001 | 001 | LTE | 54 460 | | |
| MRPC Special Int. | 26 | 56 | WAR | 5 | 0.21 P 3 | 0 | 013 | +0.73 | 013 | 013 | UTE | 41 460 | WAR | |
| MRPC Special Int. | 26 | 87 | VOL | | 0.06 2 | 53 | LTS | +19.09 | LTS | LTS | UTE | 34 460 | | |
| MRPC Special Int. | | | VOL | | 0.28 2 | 82 | 013 | +1.19 | 013 | 013 | LTE | 76 460 | | |
| MRPC Special Int. | 26 | 98 | VOL | | 0.08 2 | 98 | 012 | +1.51 | 012 | 012 | UTE | 34 460 | | |
| MRPC Special Int. | 27 | 28 | VOL | | 0.20 2 | 48 | 006 | -7.26 | 006 | 006 | LTE | 44 460 | | |
| MRPC Special Int. | 27 | 41 | VOL | | 0.18 2 | 114 | 013 | +0.15 | 013 | 013 | LTE | 44 460 | | |
| MRPC Special Int. | 27 | 78 | WAR | 8 | 0.22 P 4 | 0 | 004 | -0.78 | 004 | 004 | UTE | 41 460 | WAR | |
| MRPC Special Int. | 27 | 84 | VOL | | 0.10 2 | 74 | 014 | +0.99 | 014 | 014 | UTE | 34 460 | | |
| MRPC Special Int. | 27 | 100 | VOL | | 0.37 2 | 35 | 010 | +0.80 | 010 | 010 | UTE | 38 460 | | |
| MRPC Special Int. | 28 | 60 | WAR | 6 | 0.16 P 4 | 0 | 011 | -0.82 | 011 | 011 | UTE | 41 460 | WAR | |
| MRPC Special Int. | 28 | 96 | SAI | | 0.21 2 | 72 | 010 | +6.26 | 010 | 010 | UTE | 34 460 | | |
| MRPC Special Int. | 28 | 98 | VOL | | 0.11 2 | 56 | 005 | -11.96 | 005 | 005 | UTE | 34 460 | | |
| MRPC Special Int. | 29 | 2 | WAR | 15 | 0.62 P 3 | 69 | 011 | +0.58 | 011 | 011 | UTE | 56 460 | WAR | |
| MRPC Special Int. | 29 | 39 | VOL | | 0.28 2 | 156 | 014 | -0.16 | 014 | 014 | LTE | 67 460 | | |
| HL ROLL TRANSITION | 29 | 58 | VOL | | 0.23 2 | 137 | UTE | -2.04 | UTE | UTE | UTE | 58 460 | | |
| MRPC Special Int. | 29 | 76 | VOL | | 0.26 2 | 98 | 013 | +5.93 | 013 | 013 | UTE | 41 460 | | |
| MRPC Special Int. | 29 | 82 | WAR | 6 | 0.16 P 4 | 0 | 011 | -0.73 | 011 | 011 | UTE | 41 460 | WAR | |
| MRPC Special Int. | 29 | 83 | WAR | 11 | 0.44 P 3 | 0 | 011 | -0.75 | 011 | 011 | UTE | 41 460 | WAR | |
| MRPC Special Int. | 29 | 102 | VOL | | 0.36 2 | 116 | 008 | +5.23 | 008 | 008 | UTE | 34 460 | | |
| MRPC Special Int. | | | VOL | | 0.38 2 | 51 | 008 | +6.89 | 008 | 008 | UTE | 34 460 | | |
| MRPC Special Int. | 30 | 4 | VOL | | 0.17 2 | 70 | 010 | -0.46 | 010 | 010 | UTE | 56 460 | | |
| MRPC Special Int. | | | WAR | 20 | 0.90 P 3 | 74 | 008 | +0.67 | 008 | 008 | UTE | 56 460 | WAR | |
| MRPC Special Int. | 30 | 6 | WAR | 13 | 0.55 P 3 | 89 | 008 | -0.39 | 008 | 008 | UTE | 56 460 | WAR | |
| MRPC Special Int. | 30 | 21 | WAR | 9 | 0.37 P 3 | 72 | 007 | -0.71 | 007 | 007 | UTE | 56 460 | WAR | |
| MRPC Special Int. | 30 | 38 | VOL | | 0.17 2 | 36 | 003 | +5.08 | 003 | 003 | LTE | 49 460 | | |
| MRPC Special Int. | 30 | 51 | VOL | | 0.17 2 | 49 | 004 | -0.98 | 004 | 004 | LTE | 49 460 | | |
| MRPC Special Int. | 30 | 103 | VOL | | 0.36 2 | 144 | 008 | -0.45 | 008 | 008 | UTE | 34 460 | | |
| MRPC Special Int. | 30 | 104 | VOL | | 0.24 2 | 140 | 010 | +0.52 | 010 | 010 | UTE | 34 460 | | |
| MRPC Special Int. | | | VOL | | 0.32 2 | 45 | 008 | -0.47 | 008 | 008 | UTE | 34 460 | | |

ATTACHMENT A-4 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|-------|-----|-----|----------|---------|---------|-----|-------|--------|----------|
| MRPC Special Int. | 31 | 6 | VOL | | 0.35 | 2 | 80 | 010 | +14.48 | 010 | 010 | UTE | 56 460 | |
| MRPC Special Int. | 31 | 8 | WAR | 10 | 0.38 | P 3 | 75 | 009 | +0.66 | 009 | 009 | UTE | 56 460 | WAR |
| MRPC Special Int. | 31 | 76 | WAR | 9 | 0.26 | P 4 | 0 | 011 | -0.73 | 011 | 011 | UTE | 41 460 | WAR |
| MRPC Special Int. | 32 | 2 | VOL | | 0.16 | 2 | 105 | 010 | -1.75 | 010 | 010 | UTE | 56 460 | |
| MRPC Special Int. | 32 | 5 | WAR | 16 | 0.65 | P 3 | 87 | 009 | +0.75 | 009 | 009 | UTE | 56 460 | WAR |
| MRPC Special Int. | 32 | 15 | VOL | | 0.23 | 2 | 89 | 007 | -0.73 | 007 | 007 | UTE | 56 460 | |
| MRPC Special Int. | 33 | 2 | VOL | | 0.20 | 2 | 77 | 014 | +0.28 | 014 | 014 | UTE | 56 460 | |
| MRPC Special Int. | 33 | 4 | WAR | 12 | 0.48 | P 3 | 60 | 010 | -0.60 | 010 | 010 | UTE | 56 460 | WAR |
| MRPC Special Int. | 33 | 5 | WAR | 15 | 0.61 | P 3 | 75 | 009 | +0.62 | 009 | 009 | UTE | 56 460 | WAR |
| MRPC Special Int. | 33 | 6 | WAR | 14 | 0.58 | P 3 | 89 | 008 | -0.43 | 008 | 008 | UTE | 56 460 | WAR |
| MRPC Special Int. | 33 | 30 | VOL | | 0.33 | 2 | 83 | 013 | -0.11 | 013 | 013 | LTE | 49 460 | |
| MRPC Special Int. | 33 | 81 | WAR | 5 | 0.14 | P 4 | 0 | 011 | -0.68 | 011 | 011 | UTE | 41 460 | WAR |
| MRPC Special Int. | 34 | 1 | VOL | | 0.12 | 2 | 86 | UTS | +0.38 | UTS | UTS | UTE | 56 460 | |
| MRPC Special Int. | | | VOL | | 0.26 | 2 | 111 | 015 | -2.43 | 015 | 015 | UTE | 56 460 | |
| HL ROLL TRANSITION | 34 | 2 | MCI | | 4.29 | P 1 | 35 | UTE | -0.07 | UTE | UTE | UTE | 8 460 | |
| MRPC Special Int. | 34 | 3 | VOL | | 0.21 | 2 | 91 | 010 | +2.80 | 010 | 010 | UTE | 56 460 | |
| MRPC Special Int. | 34 | 6 | VOL | | 0.33 | 2 | 123 | 008 | -0.45 | 008 | 008 | UTE | 56 460 | |
| MRPC Special Int. | | | WAR | 10 | 0.39 | P 3 | 88 | 009 | +0.68 | 009 | 009 | UTE | 56 460 | WAR |
| MRPC Special Int. | 34 | 20 | VOL | | 0.34 | 2 | 94 | 012 | +0.92 | 012 | 012 | UTE | 56 460 | |
| MRPC Special Int. | 34 | 57 | VOL | | 0.09 | 2 | 0 | 008 | +15.71 | 008 | 008 | UTE | 41 460 | |
| MRPC Special Int. | 35 | 6 | VOL | | 0.20 | 2 | 113 | 008 | -0.44 | 008 | 008 | UTE | 56 460 | |
| MRPC Special Int. | 35 | 56 | MAI | | 0.11 | 2 | 58 | 010 | +15.05 | 010 | 010 | UTE | 41 460 | |
| MRPC Special Int. | | | MAI | | 0.12 | 2 | 31 | 010 | +10.35 | 010 | 010 | UTE | 41 460 | |
| MRPC Special Int. | | | MAI | | 0.14 | 2 | 20 | 010 | +11.36 | 010 | 010 | UTE | 41 460 | |
| MRPC Special Int. | | | MAI | | 0.19 | 2 | 18 | 010 | +10.43 | 010 | 010 | UTE | 41 460 | |
| MRPC Special Int. | | | MAI | | 0.27 | 2 | 46 | 010 | +15.09 | 010 | 010 | UTE | 41 460 | |
| MRPC Special Int. | | | MAI | | 0.31 | 2 | 17 | 010 | +11.51 | 010 | 010 | UTE | 41 460 | |
| MRPC Special Int. | | | SAI | | 0.11 | 2 | 48 | 010 | +6.26 | 010 | 010 | UTE | 41 460 | |
| MRPC Special Int. | | | SAI | | 0.12 | 2 | 14 | 010 | +4.52 | 010 | 010 | UTE | 41 460 | |
| MRPC Special Int. | | | SAI | | 0.12 | 2 | 30 | 010 | +2.82 | 010 | 010 | UTE | 41 460 | |
| MRPC Special Int. | | | SAI | | 0.13 | 2 | 26 | 010 | +9.18 | 010 | 010 | UTE | 41 460 | |
| MRPC Special Int. | | | SAI | | 0.14 | 2 | 19 | 010 | +13.84 | 010 | 010 | UTE | 41 460 | |
| MRPC Special Int. | | | SAI | | 0.14 | 2 | 30 | 010 | +4.13 | 010 | 010 | UTE | 41 460 | |
| MRPC Special Int. | | | SAI | | 0.15 | 2 | 33 | 010 | +3.44 | 010 | 010 | UTE | 41 460 | |
| MRPC Special Int. | | | SAI | | 0.19 | 2 | 34 | 010 | +19.03 | 010 | 010 | UTE | 41 460 | |
| MRPC Special Int. | | | SAI | | 0.22 | 2 | 21 | 010 | +9.98 | 010 | 010 | UTE | 41 460 | |
| MRPC Special Int. | | | SAI | | 0.22 | 2 | 37 | 010 | +17.07 | 010 | 010 | UTE | 41 460 | |
| MRPC Special Int. | | | SAI | | 0.23 | 2 | 36 | 010 | +16.12 | 010 | 010 | UTE | 41 460 | |
| MRPC Special Int. | | | SAI | | 0.24 | 2 | 45 | 010 | +12.50 | 010 | 010 | UTE | 41 460 | |
| MRPC Special Int. | | | SAI | | 0.24 | 2 | 47 | 010 | +5.37 | 010 | 010 | UTE | 41 460 | |
| MRPC Special Int. | | | SAI | | 0.25 | 2 | 33 | 010 | +14.39 | 010 | 010 | UTE | 41 460 | |
| MRPC Special Int. | | | SAI | | 0.27 | 2 | 37 | 010 | +8.88 | 010 | 010 | UTE | 41 460 | |
| MRPC Special Int. | | | SAI | | 0.32 | 2 | 38 | 010 | +13.60 | 010 | 010 | UTE | 41 460 | |
| MRPC Special Int. | 35 | 73 | VOL | | 0.15 | 2 | 0 | 013 | -0.22 | 013 | 013 | UTE | 41 460 | |
| MRPC Special Int. | 36 | 5 | VOL | | 0.19 | 2 | 97 | 010 | +2.71 | 010 | 010 | UTE | 56 460 | |
| MRPC Special Int. | 36 | 8 | WAR | 15 | 0.61 | P 3 | 72 | 008 | -0.59 | 008 | 008 | UTE | 56 460 | WAR |
| MRPC Special Int. | 36 | 9 | VOL | | 0.21 | 2 | 43 | 008 | -0.61 | 008 | 008 | UTE | 56 460 | |
| MRPC Special Int. | 36 | 20 | VOL | | 0.54 | 2 | 15 | 008 | -1.94 | 008 | 008 | LTE | 68 460 | |
| HL ROLL TRANSITION | 36 | 107 | VOL | | 0.30 | 2 | 104 | UTE | -2.28 | UTE | UTE | UTE | 70 460 | |
| MRPC Special Int. | 36 | 109 | WAR | 7 | 0.26 | P 3 | 0 | 009 | +0.87 | 009 | 009 | UTE | 38 460 | WAR |
| MRPC Special Int. | 37 | 20 | VOL | | 0.26 | 2 | 51 | LTS | +13.34 | LTS | LTS | LTE | 68 460 | |
| MRPC Special Int. | 37 | 25 | VOL | | 0.11 | 2 | 70 | 011 | -5.63 | 011 | 011 | LTE | 68 460 | |
| MRPC Special Int. | 38 | 5 | VOL | | 0.38 | 2 | 161 | 008 | +0.81 | 008 | 008 | LTE | 55 460 | |
| MRPC Special Int. | | | WAR | 9 | 0.44 | P 3 | 0 | 009 | +0.62 | 009 | 009 | LTE | 55 460 | WAR |
| MRPC Special Int. | 38 | 7 | VOL | | 0.31 | 2 | 58 | 012 | +0.90 | 012 | 012 | LTE | 55 460 | |
| MRPC Special Int. | 38 | 8 | VOL | | 0.47 | 2 | 155 | 008 | -0.61 | 008 | 008 | LTE | 51 460 | |
| MRPC Special Int. | 38 | 19 | VOL | | 0.14 | 2 | 34 | 011 | +4.99 | 011 | 011 | LTE | 51 460 | |
| MRPC Special Int. | 38 | 24 | VOL | | 0.10 | 2 | 55 | 011 | -5.52 | 011 | 011 | LTE | 51 460 | |
| MRPC Special Int. | 38 | 62 | VOL | | 0.19 | 2 | 28 | LTE | +18.53 | LTE | LTE | LTE | 36 460 | |
| MRPC Special Int. | 38 | 100 | VOL | | 0.12 | 2 | 40 | 013 | -3.70 | 013 | 013 | LTE | 16 460 | |
| MRPC Special Int. | 38 | 103 | VOL | | 0.10 | 2 | 56 | 013 | +10.15 | 013 | 013 | LTE | 16 460 | |
| MRPC Special Int. | 39 | 6 | WAR | 8 | 0.39 | P 3 | 0 | 010 | +0.66 | 010 | 010 | LTE | 68 460 | WAR |
| MRPC Special Int. | 39 | 7 | VOL | | 0.14 | 2 | 59 | 013 | +23.09 | 013 | 013 | LTE | 68 460 | |
| MRPC Special Int. | 39 | 10 | VOL | | 0.44 | 2 | 120 | 008 | -0.66 | 008 | 008 | LTE | 51 460 | |
| MRPC Special Int. | | | WAR | 9 | 0.51 | P 3 | 0 | 008 | +0.80 | 008 | 008 | LTE | 51 460 | WAR |

ATTACHMENT A-4 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|-------|-----|-----|----------|------------------|---------|-----|-------|---------|----------|
| MRPC Special Int. | 39 | 51 | VOL | | 2.00 | 2 | 11 | 001 | -8.88 | 001 | 001 | UTE | 48 460 | |
| MRPC Special Int. | | | VOL | | 2.07 | 2 | 7 | 001 | -9.91 | 001 | 001 | UTE | 48 460 | |
| MRPC Special Int. | 39 | 79 | VOL | | 0.40 | 2 | 77 | 006 | +11.26 | 006 | 006 | LTE | 36 460 | |
| MRPC Special Int. | 40 | 4 | WAR | 17 | 1.06 | P 3 | 0 | 009 | +0.68 | 009 | 009 | LTE | 51 460 | WAR |
| MRPC Special Int. | 40 | 5 | VOL | | 0.20 | 2 | 105 | 010 | +2.93 | 010 | 010 | LTE | 68 460 | |
| MRPC Special Int. | | | VOL | | 0.30 | 2 | 136 | 010 | +0.56 | 010 | 010 | LTE | 51 460 | |
| MRPC Special Int. | | | VOL | | 0.41 | 2 | 147 | 010 | +0.05 | 010 | 010 | LTE | 51 460 | |
| MRPC Special Int. | 40 | 6 | WAR | 9 | 0.55 | P 3 | 0 | 009 | +0.69 | 009 | 009 | LTE | 51 460 | WAR |
| MRPC Special Int. | 40 | 8 | VOL | | 0.29 | 2 | 130 | 008 | -0.69 | 008 | 008 | LTE | 51 460 | |
| MRPC Special Int. | 40 | 80 | VOL | | 0.71 | 2 | 82 | 015 | +8.78 | 015 | 015 | LTE | 36 460 | |
| MRPC Special Int. | 41 | 4 | VOL | | 0.37 | 2 | 102 | 012 | -0.32 | 012 | 012 | LTE | 55 460 | |
| MRPC Special Int. | 41 | 5 | VOL | | 0.23 | 2 | 121 | 010 | +0.55 | 010 | 010 | LTE | 55 460 | |
| MRPC Special Int. | 41 | 55 | VOL | | 0.33 | 2 | 84 | 004 | -16.98 | 004 | 004 | UTE | 48 460 | |
| MRPC Special Int. | 41 | 113 | WAR | 9 | 0.34 | P 3 | 114 | 008 | +0.66 | 008 | 008 | LTE | 16 460 | WAR |
| MRPC Special Int. | 42 | 4 | VOL | | 0.32 | 2 | 109 | 009 | -0.66 | 009 | 009 | LTE | 55 460 | |
| MRPC Special Int. | | | WAR | 8 | 0.38 | P 3 | 0 | 009 | +0.68 | 009 | 009 | LTE | 55 460 | WAR |
| MRPC Special Int. | 42 | 5 | VOL | | 0.28 | 2 | 132 | 010 | +0.68 | 010 | 010 | LTE | 55 460 | |
| MRPC Special Int. | | | WAR | 5 | 0.22 | P 3 | 0 | 009 | +0.65 | 009 | 009 | LTE | 55 460 | WAR |
| MRPC Special Int. | 42 | 14 | VOL | | 0.22 | 2 | 43 | 006 | -3.53 | 006 | 006 | LTE | 55 460 | |
| MRPC Special Int. | 42 | 114 | VOL | | 0.11 | 2 | 64 | 012 | -12.31 | 012 | 012 | LTE | 16 460 | |
| MRPC Special Int. | | | VOL | | 0.11 | 2 | 92 | 011 | +1.57 | 011 | 011 | LTE | 16 460 | |
| MRPC Special Int. | 42 | 117 | VOL | | 0.26 | 2 | 74 | 008 | +0.27 | 008 | 008 | LTE | 19 460 | |
| MRPC Special Int. | 43 | 1 | VOL | | 0.08 | 2 | 30 | 013 | -17.25 | 013 | 013 | LTE | 55 460 | |
| MRPC Special Int. | 43 | 3 | VOL | | 0.25 | 2 | 80 | 014 | +1.29 | 014 | 014 | LTE | 55 460 | |
| MRPC Special Int. | 43 | 4 | VOL | | 0.46 | 2 | 59 | 014 | +1.11 | 014 | 014 | LTE | 55 460 | |
| MRPC Special Int. | 43 | 6 | VOL | | 0.34 | 2 | 137 | 008 | +0.73 | 008 | 008 | LTE | 51 460 | |
| MRPC Special Int. | 43 | 7 | WAR | 12 | 0.72 | P 3 | 0 | 008 | +0.71 | 008 | 008 | LTE | 51 460 | WAR |
| MRPC Special Int. | 44 | 3 | WAR | 9 | 0.42 | P 3 | 0 | 009 | +0.68 | 009 | 009 | LTE | 55 460 | WAR |
| MRPC Special Int. | 44 | 16 | VOL | | 0.07 | 2 | 81 | 006 | -11.33 | 006 | 006 | LTE | 55 460 | |
| HL ROLL TRANSITION | 44 | 106 | VOL | | 0.23 | 2 | 130 | UTE | -4.11 | UTE | UTE | UTE | 123 460 | |
| MRPC Special Int. | 45 | 1 | VOL | | 0.47 | 2 | 124 | 014 | -0.71 | 014 | 014 | LTE | 55 460 | |
| MRPC Special Int. | 45 | 5 | WAR | 7 | 0.33 | P 3 | 0 | 009 | +0.74 | 009 | 009 | LTE | 55 460 | WAR |
| MRPC Special Int. | 45 | 62 | VOL | | 0.11 | 2 | 58 | 010 | -21.46 | 010 | 010 | UTE | 72 460 | |
| MRPC Special Int. | 45 | 119 | WAR | 8 | 0.28 | P 3 | 101 | 008 | -0.64 | 008 | 008 | LTE | 16 460 | WAR |
| MRPC Special Int. | 46 | 4 | WAR | 15 | 0.72 | P 3 | 0 | 010 | +0.70 | 010 | 010 | LTE | 55 460 | WAR |
| HL ROLL TRANSITION | 46 | 31 | VOL | | 0.21 | 2 | 82 | UTE | -0.52 | UTE | UTE | UTE | 48 460 | |
| MRPC Special Int. | 46 | 50 | VOL | | 0.22 | 2 | 76 | 008 | +22.47 | 008 | 008 | UTE | 48 460 | |
| MRPC Special Int. | | | VOL | | 0.24 | 2 | 71 | 013 | +7.72 | 013 | 013 | UTE | 48 460 | |
| HL ROLL TRANSITION | 46 | 91 | VOL | | 0.19 | 2 | 78 | UTE | -3.16 | UTE | UTE | UTE | 93 460 | |
| MRPC Special Int. | 46 | 95 | VOL | | 0.29 | 2 | 108 | 014 | -0.48 | 014 | 014 | LTE | 16 460 | |
| MRPC Special Int. | 46 | 99 | VOL | | 0.48 | 2 | 76 | 011 | -0.79 | 011 | 011 | LTE | 16 460 | |
| MRPC Special Int. | 47 | 4 | WAR | 12 | 0.58 | P 3 | 0 | 010 | +0.70 | 010 | 010 | LTE | 55 460 | WAR |
| MRPC Special Int. | 47 | 46 | WAR | 6 | 0.33 | P 3 | 57 | 014 | +0.46 | 014 | 014 | UTE | 48 460 | WAR |
| HL ROLL TRANSITION | 47 | 62 | VOL | | 0.10 | 2 | 72 | UTE | -1.39 | UTE | UTE | UTE | 66 460 | |
| MRPC Special Int. | 47 | 75 | VOL | | 0.09 | 2 | 52 | 012 | +8.53 | 012 | 012 | LTE | 36 460 | |
| MRPC Special Int. | 47 | 85 | VOL | | 0.13 | 2 | 59 | 015 | -12.73 | 015 | 015 | LTE | 36 460 | |
| MRPC Special Int. | 47 | 90 | VOL | | 0.10 | 2 | 55 | 014 | -11.83 | 014 | 014 | LTE | 36 460 | |
| MRPC Special Int. | 47 | 103 | VOL | | 0.27 | 2 | 137 | 012 | +0.47 | 012 | 012 | LTE | 16 460 | |
| MRPC Special Int. | 47 | 105 | VOL | | 0.09 | 2 | 68 | 014 | +2.34 | 014 | 014 | LTE | 16 460 | |
| MRPC Special Int. | 47 | 114 | VOL | | 0.30 | 2 | 55 | UTS | +13.90 | UTS | UTS | LTE | 16 460 | |
| MRPC Special Int. | 47 | 117 | VOL | | 0.15 | 2 | 48 | 015 | +12.83 | 015 | 015 | LTE | 16 460 | |
| MRPC Special Int. | 47 | 122 | VOL | | 0.22 | 2 | 102 | 015 | +19.76 | 015 | 015 | LTE | 19 460 | |
| MRPC Special Int. | 48 | 3 | WAR | 14 | 0.72 | P 3 | 0 | 009 | +0.69 | 009 | 009 | LTE | 51 460 | WAR |
| MRPC Special Int. | 48 | 95 | VOL | | 0.06 | 2 | 35 | 013 | +11.28 | 013 | 013 | LTE | 19 460 | |
| MRPC Special Int. | 49 | 5 | SVI | | 0.56 | 2 | 83 | 009 | +14.33 to +30.84 | 009 | 009 | LTE | 51 460 | |
| MRPC Special Int. | 49 | 76 | VOL | | 0.24 | 2 | 162 | 014 | +0.30 | 014 | 014 | LTE | 36 460 | |
| MRPC Special Int. | 49 | 82 | VOL | | 0.15 | 2 | 44 | LTS | +18.96 | LTS | LTS | LTE | 36 460 | |
| MRPC Special Int. | 49 | 113 | WAR | 9 | 0.32 | P 3 | 69 | 011 | +0.81 | 011 | 011 | LTE | 16 460 | WAR |
| MRPC Special Int. | 49 | 114 | VOL | | 0.36 | 2 | 85 | 011 | +1.49 | 011 | 011 | LTE | 16 460 | |
| MRPC Special Int. | 49 | 121 | VOL | | 0.04 | 2 | 15 | 013 | +1.57 | 013 | 013 | LTE | 16 460 | |
| MRPC Special Int. | 50 | 3 | VOL | | 0.18 | 2 | 89 | 009 | +17.77 | 009 | 009 | LTE | 51 460 | |
| MRPC Special Int. | | | VOL | | 0.22 | 2 | 72 | 009 | +24.06 | 009 | 009 | LTE | 51 460 | |
| MRPC Special Int. | | | WAR | 11 | 0.69 | P 3 | 0 | 009 | +0.71 | 009 | 009 | LTE | 51 460 | WAR |
| MRPC Special Int. | 50 | 11 | VOL | | 0.09 | 2 | 63 | 011 | +26.69 | 011 | 011 | LTE | 51 460 | |
| MRPC Special Int. | | | VOL | | 0.14 | 2 | 43 | 011 | +3.50 | 011 | 011 | LTE | 51 460 | |

ATTACHMENT A-4 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|-------|-----|-----|----------|---------|------------------|-----|-------|-------|------------|
| MRPC Special Int. | | | | | VOL | | | 0.14 2 | 60 008 | +7.77 | 008 | 008 | LTE | 51 460 |
| MRPC Special Int. | 50 | 29 | | | VOL | | | 0.10 2 | 49 014 | -4.90 | 014 | 014 | LTE | 51 460 |
| MRPC Special Int. | 50 | 62 | | | VOL | | | 0.30 2 | 106 013 | +0.39 | 013 | 013 | UTE | 48 460 |
| MRPC Special Int. | 50 | 107 | | | VOL | | | 0.09 2 | 78 014 | +6.91 | 014 | 014 | LTE | 19 460 |
| MRPC Special Int. | 51 | 3 | WAR | 5 | | | | 0.30 P 3 | 0 009 | +0.70 | 009 | 009 | LTE | 51 460 WAR |
| MRPC Special Int. | 51 | 6 | | | VOL | | | 0.07 2 | 68 002 | +2.61 | 002 | 002 | LTE | 51 460 |
| MRPC Special Int. | 51 | 69 | | | VOL | | | 0.23 2 | 30 002 | +12.96 | 002 | 002 | LTE | 71 460 |
| MRPC Special Int. | 52 | 26 | | | VOL | | | 0.19 2 | 46 013 | -8.64 | 013 | 013 | LTE | 51 460 |
| MRPC Special Int. | 52 | 29 | | | VOL | | | 0.16 2 | 47 015 | +12.97 | 015 | 015 | LTE | 51 460 |
| MRPC Special Int. | 52 | 35 | | | VOL | | | 0.16 2 | 47 LTS | +21.95 | LTS | LTS | UTE | 48 460 |
| C/L Tubesheet | 52 | 63 | | | SAI | | | 0.17 2 | 97 LTS | -1.98 | LTS | LTS | LTE | 30 460 |
| MRPC Special Int. | 52 | 75 | | | VOL | | | 0.15 2 | 54 012 | -15.69 | 012 | 012 | UTE | 70 460 |
| MRPC Special Int. | 52 | 98 | | | VOL | | | 0.19 2 | 102 014 | +0.86 | 014 | 014 | LTE | 19 460 |
| MRPC Special Int. | 52 | 106 | | | VOL | | | 0.09 2 | 62 005 | -8.34 | 005 | 005 | LTE | 19 460 |
| MRPC Special Int. | 52 | 108 | | | VOL | | | 0.26 2 | 65 014 | +0.67 | 014 | 014 | LTE | 19 460 |
| MRPC Special Int. | 52 | 121 | | | VOL | | | 0.27 2 | 52 010 | +0.52 | 010 | 010 | LTE | 19 460 |
| MRPC Special Int. | 53 | 1 | | | VOL | | | 0.38 2 | 122 011 | +0.58 | 011 | 011 | LTE | 55 460 |
| MRPC Special Int. | 53 | 4 | | | VOL | | | 0.12 2 | 99 013 | +0.82 | 013 | 013 | LTE | 51 460 |
| MRPC Special Int. | 53 | 54 | | | VOL | | | 0.10 2 | 74 014 | +18.31 | 014 | 014 | LTE | 68 460 |
| MRPC Special Int. | 53 | 71 | | | VOL | | | 0.21 2 | 35 014 | +0.43 | 014 | 014 | LTE | 33 460 |
| MRPC Special Int. | 53 | 86 | | | VOL | | | 0.19 2 | 71 008 | +8.32 | 008 | 008 | LTE | 66 460 |
| MRPC Special Int. | 53 | 101 | | | VOL | | | 0.23 2 | 43 013 | +0.40 | 013 | 013 | LTE | 19 460 |
| MRPC Special Int. | 54 | 2 | | | VOL | | | 0.11 2 | 85 014 | +1.07 | 014 | 014 | LTE | 51 460 |
| MRPC Special Int. | 54 | 3 | SVI | | | | | 0.40 2 | 83 014 | +0.94 | 014 | 014 | LTE | 68 460 |
| HL ROLL TRANSITION | 54 | 43 | | | VOL | | | 0.18 2 | 114 UTE | -2.39 | UTE | UTE | UTE | 51 460 |
| MRPC Special Int. | 54 | 126 | | | SAI | | | 0.11 2 | 79 012 | +15.79 | 012 | 012 | LTE | 19 460 |
| MRPC Special Int. | | | | | SAI | | | 0.11 2 | 87 012 | +14.65 | 012 | 012 | LTE | 19 460 |
| HL ROLL TRANSITION | 55 | 48 | | | VOL | | | 0.35 2 | 95 UTE | -2.78 | UTE | UTE | UTE | 51 460 |
| MRPC Special Int. | 55 | 120 | | | VOL | | | 0.44 2 | 126 008 | -0.70 | 008 | 008 | LTE | 19 460 |
| MRPC Special Int. | 55 | 124 | | | SVI | | | 2.42 2 | 89 013 | +0.86 | 013 | 013 | LTE | 19 460 |
| MRPC Special Int. | 56 | 18 | | | VOL | | | 0.09 2 | 59 010 | -6.88 | 010 | 010 | LTE | 51 460 |
| MRPC Special Int. | 56 | 110 | | | VOL | | | 0.08 2 | 67 011 | +1.40 | 011 | 011 | LTE | 19 460 |
| MRPC Special Int. | 56 | 126 | | | VOL | | | 0.23 2 | 153 009 | -0.79 | 009 | 009 | LTE | 19 460 |
| MRPC Special Int. | 57 | 10 | | | VOL | | | 0.14 2 | 75 011 | +1.14 | 011 | 011 | LTE | 51 460 |
| HL ROLL TRANSITION | 57 | 43 | | | SAI | | | 0.12 2 | 115 UTE | -2.16 | UTE | UTE | UTE | 51 460 |
| MRPC Special Int. | 57 | 55 | | | VOL | | | 0.11 2 | 44 010 | +27.36 | 010 | 010 | UTE | 48 460 |
| HL ROLL TRANSITION | 57 | 98 | | | SCI | | | 1.62 P 1 | 26 UTE | -0.11 | UTE | UTS | UTE | 74 460 |
| MRPC Special Int. | 57 | 103 | | | SAI | | | 0.20 2 | 48 009 | +3.48 | 009 | 009 | LTE | 19 460 |
| MRPC Special Int. | 57 | 114 | | | VOL | | | 0.06 2 | 23 011 | +7.97 | 011 | 011 | LTE | 19 460 |
| MRPC Special Int. | 57 | 122 | WAR | 9 | | | | 0.36 P 3 | 85 010 | +0.49 | 010 | 010 | LTE | 19 460 WAR |
| MRPC Special Int. | 58 | 3 | | | VOL | | | 0.16 2 | 63 010 | -0.06 | 010 | 010 | UTE | 50 460 |
| MRPC Special Int. | 58 | 4 | WAR | 5 | | | | 0.29 P 3 | 0 009 | +0.79 | 009 | 009 | LTE | 51 460 WAR |
| MRPC Special Int. | 58 | 18 | | | VOL | | | 0.33 2 | 84 015 | +0.86 | 015 | 015 | LTE | 51 460 |
| MRPC Special Int. | 58 | 50 | | | SAI | | | 0.11 2 | 105 UTS | -14.29 | UTS | UTS | UTE | 48 460 |
| MRPC Special Int. | | | | | SAI | | | 0.12 2 | 114 UTS | -15.04 | UTS | UTS | UTE | 48 460 |
| MRPC Special Int. | 58 | 94 | | | VOL | | | 0.12 2 | 72 003 | -15.15 | 003 | 003 | LTE | 33 460 |
| MRPC Special Int. | 58 | 124 | WAR | 13 | | | | 0.53 P 3 | 87 009 | -0.73 | 009 | 009 | LTE | 19 460 WAR |
| MRPC Special Int. | 58 | 125 | | | VOL | | | 0.36 2 | 94 009 | +0.59 | 009 | 009 | LTE | 19 460 |
| MRPC Special Int. | 59 | 3 | | | SVI | | | 0.52 2 | 51 014 | +0.70 | 014 | 014 | UTE | 50 460 |
| MRPC Special Int. | | | | | VOL | | | 0.34 2 | 140 009 | +0.72 | 009 | 009 | UTE | 50 460 |
| MRPC Special Int. | 59 | 8 | WAR | 5 | | | | 0.28 P 3 | 0 009 | -0.65 | 009 | 009 | LTE | 51 460 WAR |
| MRPC Special Int. | 59 | 39 | | | VOL | | | 0.12 2 | 54 015 | +14.76 | 015 | 015 | UTE | 46 460 |
| MRPC Special Int. | 59 | 96 | | | VOL | | | 0.24 2 | 102 013 | +0.82 | 013 | 013 | LTE | 19 460 |
| MRPC Special Int. | 59 | 118 | | | VOL | | | 0.33 2 | 137 009 | -0.49 | 009 | 009 | LTE | 19 460 |
| MRPC Special Int. | | | | | VOL | | | 0.34 2 | 95 008 | -0.63 | 008 | 008 | LTE | 19 460 |
| MRPC Special Int. | 59 | 121 | WAR | 16 | | | | 0.76 P 3 | 0 009 | +0.58 | 009 | 009 | LTE | 19 460 WAR |
| MRPC Special Int. | | | | | VOL | | | 0.24 2 | 109 009 | +21.60 to +30.36 | 009 | 009 | LTE | 19 460 |
| MRPC Special Int. | 59 | 122 | WAR | 8 | | | | 0.34 P 3 | 61 008 | -0.60 | 008 | 008 | LTE | 19 460 WAR |
| MRPC Special Int. | | | | | WAR | | | 0.39 P 3 | 111 009 | -0.71 | 009 | 009 | LTE | 19 460 WAR |
| MRPC Special Int. | 60 | 124 | | | VOL | | | 0.33 2 | 76 009 | -0.84 | 009 | 009 | LTE | 19 460 |
| MRPC Special Int. | 60 | 128 | | | VOL | | | 0.10 2 | 84 014 | +0.79 | 014 | 014 | LTE | 19 460 |
| MRPC Special Int. | 61 | 2 | | | VOL | | | 0.18 2 | 67 014 | +1.26 | 014 | 014 | UTE | 50 460 |
| MRPC Special Int. | 61 | 28 | | | VOL | | | 0.29 2 | 93 UTS | +17.14 | UTE | UTS | UTE | 50 460 |
| MRPC Special Int. | 61 | 58 | WAR | 5 | | | | 0.16 P 3 | 72 013 | +0.04 | 013 | 013 | UTE | 2 460 WAR |
| MRPC Special Int. | 61 | 85 | | | VOL | | | 0.26 2 | 90 015 | +0.88 | 015 | 015 | LTE | 33 460 |

ATTACHMENT A-4 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|-------|-----|-----|----------|------------------|---------|-----|-------|--------|----------|
| MRPC Special Int. | 61 | 108 | VOL | | 0.09 | 2 | 84 | 013 | +25.08 | 013 | 013 | LTE | 22 460 | |
| MRPC Special Int. | 61 | 121 | WAR | 11 | 0.41 | P 3 | 97 | 009 | -0.75 | 009 | 009 | LTE | 22 460 | WAR |
| MRPC Special Int. | 61 | 122 | WAR | 11 | 0.41 | P 3 | 100 | 009 | +0.64 | 009 | 010 | LTE | 22 460 | WAR |
| MRPC Special Int. | | | WAR | 13 | 0.52 | P 3 | 53 | 009 | -0.70 | 009 | 010 | LTE | 22 460 | WAR |
| MRPC Special Int. | | | VOL | | 0.62 | 1 | 85 | 009 | +20.83 to +31.20 | 009 | 010 | LTE | 22 460 | |
| MRPC Special Int. | 61 | 124 | VOL | | 0.21 | 2 | 150 | 009 | -0.70 | 009 | 009 | LTE | 22 460 | |
| MRPC Special Int. | | | VOL | | 0.19 | 2 | 102 | 010 | -5.71 to -1.30 | 010 | 010 | LTE | 22 460 | |
| MRPC Special Int. | 62 | 115 | VOL | | 0.19 | 2 | 101 | 014 | +1.39 | 014 | 014 | LTE | 25 460 | |
| MRPC Special Int. | 63 | 59 | WAR | 5 | 0.18 | P 3 | 105 | 013 | +0.82 | 013 | 013 | UTE | 2 460 | WAR |
| MRPC Special Int. | 63 | 66 | WAR | 10 | 0.34 | P 3 | 62 | 014 | +0.84 | 014 | 014 | UTE | 2 460 | WAR |
| HL ROLL TRANSITION | 63 | 125 | SAI | | 0.83 | 2 | 24 | UTE | -1.12 | UTE | UTE | UTE | 94 460 | |
| MRPC Special Int. | 63 | 128 | VOL | | 0.26 | 2 | 101 | 014 | +0.95 | 014 | 014 | LTE | 25 460 | |
| HL ROLL TRANSITION | 64 | 35 | VOL | | 0.18 | 2 | 128 | UTE | -2.64 | UTE | UTE | UTE | 51 460 | |
| MRPC Special Int. | 64 | 110 | SAI | | 0.89 | 2 | 46 | 013 | +31.77 | 013 | 013 | LTE | 25 460 | |
| MRPC Special Int. | | | SAI | | 1.61 | 2 | 26 | 013 | +32.77 | 013 | 013 | LTE | 25 460 | |
| MRPC Special Int. | 64 | 124 | WAR | 18 | 0.74 | P 3 | 91 | 009 | -0.78 | 009 | 009 | LTE | 22 460 | WAR |
| MRPC Special Int. | 64 | 125 | WAR | 11 | 0.44 | P 3 | 106 | 009 | +0.53 | 009 | 010 | LTE | 22 460 | WAR |
| MRPC Special Int. | | | VOL | | 0.47 | 2 | 78 | 009 | +20.52 to +32.23 | 009 | 010 | LTE | 22 460 | |
| MRPC Special Int. | 64 | 128 | VOL | | 0.16 | 2 | 91 | 015 | +0.65 | 015 | 015 | LTE | 25 460 | |
| MRPC Special Int. | 65 | 76 | VOL | | 0.15 | 2 | 51 | 008 | +20.10 | 008 | 008 | LTE | 66 460 | |
| MRPC Special Int. | 65 | 99 | VOL | | 0.08 | 2 | 57 | 009 | -4.49 | 009 | 009 | LTE | 22 460 | |
| MRPC Special Int. | | | VOL | | 0.16 | 2 | 68 | 009 | +16.86 | 009 | 009 | LTE | 43 460 | |
| HL ROLL TRANSITION | 65 | 111 | VOL | | 0.27 | 2 | 123 | UTE | -2.66 | UTE | UTE | UTE | 80 460 | |
| MRPC Special Int. | 65 | 126 | WAR | 14 | 0.65 | P 3 | 0 | 009 | -0.76 | 009 | 009 | LTE | 25 460 | WAR |
| MRPC Special Int. | 65 | 127 | WAR | 15 | 0.69 | P 3 | 0 | 009 | -0.67 | 009 | 010 | LTE | 25 460 | WAR |
| MRPC Special Int. | 65 | 128 | VOL | | 0.59 | 2 | 83 | 009 | -0.44 | 009 | 009 | LTE | 43 460 | |
| MRPC Special Int. | 65 | 129 | VOL | | 0.26 | 2 | 121 | 010 | -1.73 | 010 | 010 | LTE | 25 460 | |
| MRPC Special Int. | 66 | 57 | VOL | | 0.12 | 2 | 53 | 008 | +7.05 | 009 | 008 | UTE | 6 460 | |
| HL ROLL TRANSITION | 66 | 81 | VOL | | 0.21 | 2 | 129 | UTE | -1.96 | UTE | UTE | UTE | 66 460 | |
| MRPC Special Int. | 66 | 127 | VOL | | 0.61 | 2 | 93 | 009 | +19.76 to +25.94 | 009 | 009 | LTE | 25 460 | |
| MRPC Special Int. | 66 | 128 | WAR | 8 | 0.66 | P 3 | 0 | 009 | -0.71 | 009 | 009 | LTE | 43 460 | WAR |
| MRPC Special Int. | 66 | 129 | VOL | | 0.67 | 2 | 99 | 009 | -0.57 | 009 | 009 | LTE | 43 460 | |
| MRPC Special Int. | 67 | 35 | VOL | | 0.12 | 2 | 65 | 004 | +18.24 | 004 | 004 | UTE | 46 460 | |
| MRPC Special Int. | | | VOL | | 0.14 | 2 | 80 | 004 | -3.35 | 004 | 004 | UTE | 46 460 | |
| MRPC Special Int. | 68 | 40 | VOL | | 0.19 | 2 | 108 | 014 | -0.07 | 014 | 014 | UTE | 46 460 | |
| HL ROLL TRANSITION | 68 | 84 | VOL | | 0.16 | 2 | 0 | UTE | -1.76 | UTE | UTE | UTE | 40 460 | |
| MRPC Special Int. | 68 | 123 | WAR | 12 | 0.51 | P 3 | 0 | 009 | -0.80 | 009 | 009 | LTE | 25 460 | WAR |
| MRPC Special Int. | 69 | 25 | VOL | | 0.17 | 2 | 65 | 004 | +6.76 | 004 | 004 | LTE | 51 460 | |
| MRPC Special Int. | 69 | 81 | VOL | | 1.29 | 1 | 57 | UTS | +13.21 | UTS | UTS | LTE | 33 460 | |
| HL ROLL TRANSITION | | | VOL | | 0.32 | 2 | 118 | UTE | -2.39 | UTE | UTE | UTE | 67 460 | |
| HL ROLL TRANSITION | 69 | 132 | SAI | | 1.09 | 2 | 29 | UTE | -1.15 | UTE | UTE | UTE | 98 460 | |
| MRPC Special Int. | 70 | 98 | VOL | | 0.11 | 2 | 76 | UTS | +15.70 | UTS | UTS | LTE | 27 460 | |
| MRPC Special Int. | | | VOL | | 0.21 | 2 | 104 | UTS | +19.36 | UTS | UTS | LTE | 27 460 | |
| MRPC Special Int. | 70 | 111 | VOL | | 0.35 | 2 | 56 | 006 | -0.64 | 006 | 006 | LTE | 25 460 | |
| MRPC Special Int. | 70 | 131 | VOL | | 0.21 | 2 | 93 | 010 | +4.90 | 010 | 010 | LTE | 25 460 | |
| MRPC Special Int. | 71 | 5 | WAR | 11 | 0.74 | P 3 | 0 | 009 | -0.61 | 009 | 009 | LTE | 47 460 | WAR |
| MRPC Special Int. | 71 | 6 | VOL | | 0.23 | 2 | 61 | 006 | +7.71 | 006 | 006 | LTE | 47 460 | |
| MRPC Special Int. | | | VOL | | 0.30 | 2 | 118 | 011 | +0.38 | 011 | 011 | LTE | 47 460 | |
| MRPC Special Int. | 71 | 68 | VOL | | 0.15 | 2 | 54 | 002 | -4.26 | 002 | 002 | UTE | 2 460 | |
| HL ROLL TRANSITION | 71 | 81 | VOL | | 0.27 | 2 | 81 | UTE | -1.74 | UTE | UTE | UTE | 41 460 | |
| MRPC Special Int. | 71 | 125 | VOL | | 0.24 | 2 | 152 | 010 | +0.15 | 010 | 010 | LTE | 25 460 | |
| MRPC Special Int. | 71 | 131 | VOL | | 0.20 | 2 | 68 | 015 | +0.41 | 015 | 015 | LTE | 64 460 | |
| MRPC Special Int. | 72 | 13 | VOL | | 0.27 | 2 | 147 | 012 | +0.42 | 012 | 012 | UTE | 50 460 | |
| MRPC Special Int. | 72 | 19 | VOL | | 0.24 | 2 | 93 | 011 | +0.60 | 011 | 011 | UTE | 50 460 | |
| MRPC Special Int. | | | VOL | | 0.27 | 2 | 133 | 011 | +0.59 | 011 | 011 | UTE | 50 460 | |
| MRPC Special Int. | 72 | 41 | VOL | | 0.51 | 2 | 113 | 010 | +0.46 | 010 | 010 | UTE | 46 460 | |
| MRPC Special Int. | 72 | 58 | WAR | 7 | 0.23 | P 3 | 53 | 014 | -0.25 | 014 | 014 | UTE | 2 460 | WAR |
| MRPC Special Int. | 72 | 84 | SAI | | 0.09 | 2 | 85 | 006 | -15.37 | 006 | 006 | LTE | 33 460 | |
| MRPC Special Int. | | | SAI | | 0.15 | 2 | 73 | 006 | -13.64 | 006 | 006 | LTE | 33 460 | |
| HL ROLL TRANSITION | 72 | 95 | VOL | | 0.19 | 2 | 148 | UTE | -1.89 | UTE | UTE | UTE | 44 460 | |
| MRPC Special Int. | 72 | 99 | VOL | | 0.10 | 2 | 59 | 014 | +1.10 | 014 | 014 | LTE | 27 460 | |
| HL ROLL TRANSITION | 72 | 123 | SAI | | 0.68 | 2 | 19 | UTE | -1.15 | UTE | UTE | UTE | 98 460 | |
| MRPC Special Int. | 73 | 6 | VOL | | 0.10 | 2 | 92 | 011 | -0.98 | 011 | 011 | LTE | 47 460 | |
| MRPC Special Int. | | | WAR | 8 | 0.55 | P 3 | 0 | 012 | +0.59 | 012 | 012 | LTE | 47 460 | WAR |
| MRPC Special Int. | 73 | 9 | WAR | 17 | 1.17 | P 3 | 0 | 013 | +0.47 | 013 | 013 | LTE | 47 460 | WAR |

ATTACHMENT A-4 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|----------|-----|-----|-----------------|---------|---------|-----|-------|-------|----------|
| MRPC Special Int. | 73 | 10 | VOL | | 0.16 2 | 91 | 011 | +5.60 | 011 | 011 | LTE | 47 | 460 | |
| MRPC Special Int. | 73 | 44 | VOL | | 0.23 2 | 123 | 008 | -0.69 | 008 | 008 | UTE | 46 | 460 | |
| MRPC Special Int. | 73 | 49 | VOL | | 0.09 2 | 60 | 005 | +24.58 | 005 | 005 | UTE | 46 | 460 | |
| MRPC Special Int. | 73 | 103 | VOL | | 0.12 2 | 67 | 009 | +27.03 | 009 | 009 | LTE | 43 | 460 | |
| MRPC Special Int. | 73 | 125 | VOL | | 0.27 2 | 145 | 010 | +0.38 | 010 | 010 | LTE | 25 | 460 | |
| MRPC Special Int. | 74 | 31 | VOL | | 0.13 2 | 63 | 008 | +10.60 | 008 | 008 | LTE | 47 | 460 | |
| MRPC Special Int. | 74 | 47 | VOL | | 0.13 2 | 80 | 015 | +13.82 | 015 | 015 | UTE | 46 | 460 | |
| MRPC Special Int. | 74 | 63 | WAR | 8 | 0.28 P 3 | 66 | 006 | +0.67 | 006 | 006 | UTE | 2 | 460 | WAR |
| MRPC Special Int. | 75 | 7 | VOL | | 0.09 2 | 46 | 008 | -17.94 | 008 | 008 | LTE | 47 | 460 | |
| MRPC Special Int. | 75 | 21 | VOL | | 0.08 2 | 59 | 008 | +13.07 | 008 | 008 | LTE | 47 | 460 | |
| MRPC Special Int. | 75 | 99 | VOL | | 0.24 2 | 66 | 012 | -4.48 | 012 | 012 | LTE | 25 | 460 | |
| MRPC Special Int. | 75 | 112 | VOL | | 0.22 2 | 76 | 014 | +1.15 | 014 | 014 | LTE | 27 | 460 | |
| MRPC Special Int. | 75 | 121 | WAR | 8 | 0.34 P 3 | 0 | 003 | -0.82 | 003 | 003 | LTE | 25 | 460 | WAR |
| MRPC Special Int. | 76 | 118 | VOL | | 0.08 2 | 69 | 011 | +19.21 | 011 | 012 | LTE | 25 | 460 | |
| MRPC Special Int. | | | VOL | | 0.11 2 | 57 | 012 | +2.30 | 011 | 012 | LTE | 25 | 460 | |
| MRPC Special Int. | | | VOL | | 0.12 2 | 92 | 011 | +19.99 | 011 | 012 | LTE | 25 | 460 | |
| MRPC Special Int. | | | VOL | | 0.14 2 | 108 | 012 | +3.24 | 012 | 012 | LTE | 27 | 460 | |
| MRPC Special Int. | | | VOL | | 0.18 2 | 78 | 011 | +22.14 | 011 | 012 | LTE | 25 | 460 | |
| MRPC Special Int. | | | VOL | | 0.27 2 | 95 | 011 | +25.63 | 011 | 012 | LTE | 25 | 460 | |
| MRPC Special Int. | | | VOL | | 0.29 2 | 94 | 014 | +1.45 | 014 | 014 | LTE | 27 | 460 | |
| MRPC Special Int. | | | VOL | | 0.49 1 | 86 | 015 | +21.95 | 015 | 015 | LTE | 27 | 460 | |
| MRPC Special Int. | | | VOL | | 0.68 1 | 80 | 013 | -8.85 | 013 | 013 | LTE | 27 | 460 | |
| MRPC Special Int. | 77 | 25 | VOL | | 0.15 2 | 67 | 011 | +7.64 | 011 | 011 | LTE | 47 | 460 | |
| MRPC Special Int. | 77 | 44 | VOL | | 0.44 2 | 132 | 003 | -0.63 | 003 | 003 | LTE | 26 | 460 | |
| MRPC Special Int. | 77 | 50 | VOL | | 0.37 2 | 72 | 007 | -0.70 | 007 | 007 | LTE | 26 | 460 | |
| HL ROLL TRANSITION | 77 | 59 | SCI | | 0.30 P 1 | 24 | UTE | -1.19 | UTE | UTE | UTE | 6 | 460 | |
| MRPC Special Int. | 77 | 66 | VOL | | 0.08 2 | 47 | 015 | +9.29 | 015 | 015 | UTE | 4 | 460 | |
| MRPC Special Int. | 77 | 71 | VOL | | 0.09 2 | 31 | 015 | +15.25 | 015 | 015 | UTE | 4 | 460 | |
| MRPC H/L Plugs | 78 | 6 | SAI | | 6.93 1 | 14 | UTE | -0.47 | UTE | UTE | UTE | 8 | 410 | |
| MRPC Special Int. | 78 | 14 | VOL | | 0.08 2 | 69 | 009 | +11.47 | 009 | 009 | LTE | 47 | 460 | |
| MRPC Special Int. | 78 | 34 | WAR | 9 | 0.63 P 3 | 0 | 004 | -0.73 | 004 | 004 | LTE | 47 | 460 | WAR |
| MRPC Special Int. | 78 | 41 | VOL | | 0.44 2 | 153 | 004 | -0.67 | 004 | 004 | LTE | 26 | 460 | |
| MRPC Lane & Wedge | | | WAR | 3 | 0.21 P 3 | 56 | 015 | +0.75 | 015 | 015 | UTE | 3 | 460 | WAR |
| MRPC Special Int. | 78 | 42 | WAR | 6 | 0.31 P 3 | 0 | 004 | -0.56 | 004 | 004 | LTE | 26 | 460 | WAR |
| MRPC Special Int. | 78 | 44 | VOL | | 0.17 2 | 48 | 004 | +6.35 | 004 | 004 | LTE | 26 | 460 | |
| MRPC Special Int. | 78 | 100 | SAI | | 0.21 2 | 76 | 009 | -1.07 | 009 | 009 | UTE | 23 | 460 | |
| MRPC Special Int. | | | SAI | | 0.35 2 | 103 | 009 | +0.25 | 009 | 009 | UTE | 23 | 460 | |
| MRPC Special Int. | 78 | 111 | VOL | | 0.14 2 | 78 | 014 | +1.00 | 014 | 014 | LTE | 43 | 460 | |
| MRPC Special Int. | 79 | 14 | WAR | 5 | 0.23 P 3 | 135 | 007 | +0.74 | 007 | 007 | LTE | 39 | 460 | WAR |
| MRPC Lane & Wedge | 79 | 27 | WAR | 3 | 0.22 P 3 | 55 | 015 | +0.72 | 015 | 015 | UTE | 3 | 460 | WAR |
| MRPC Special Int. | | | WAR | 3 | 0.16 P 3 | 0 | 015 | +0.72 | 015 | 015 | LTE | 39 | 460 | WAR |
| MRPC Special Int. | 79 | 35 | VOL | | 0.11 2 | 35 | LTS | +21.19 | LTS | LTS | LTE | 39 | 460 | |
| MRPC Special Int. | 79 | 50 | VOL | | 0.19 2 | 116 | 005 | +8.05 | 005 | 005 | LTE | 26 | 460 | |
| MRPC Special Int. | 80 | 7 | VOL | | 0.14 2 | 102 | 011 | -2.66 | 011 | 011 | LTE | 47 | 460 | |
| MRPC Special Int. | 80 | 48 | VOL | | 0.26 2 | 97 | 014 | +11.21 | 014 | 014 | LTE | 26 | 460 | |
| MRPC Special Int. | 80 | 71 | VOL | | 1.01 1 | 88 | 006 | -6.20 | 006 | 006 | UTE | 4 | 460 | |
| MRPC Special Int. | 80 | 123 | VOL | | 0.22 2 | 68 | 014 | +1.85 | 014 | 014 | UTE | 23 | 460 | |
| MRPC Special Int. | 80 | 130 | WAR | 11 | 0.36 P 3 | 93 | 008 | -0.53 | 008 | 008 | UTE | 23 | 460 | WAR |
| HL ROLL TRANSITION | 80 | 131 | SCI | | 1.08 P 1 | 20 | UTE | -0.29 | UTE | UTE | UTE | 123 | 460 | |
| MRPC Special Int. | 81 | 2 | VOL | | 0.42 2 | 122 | 012 | +0.43 | 012 | 012 | LTE | 47 | 460 | |
| MRPC Special Int. | 81 | 29 | WAR | 8 | 0.38 P 3 | 0 | 010 | -0.66 | 010 | 010 | LTE | 39 | 460 | WAR |
| MRPC Special Int. | 81 | 33 | WAR | 4 | 0.20 P 3 | 0 | 010 | -0.62 | 010 | 010 | LTE | 39 | 460 | WAR |
| MRPC Special Int. | 81 | 36 | VOL | | 0.38 2 | 141 | 010 | -0.75 | 010 | 010 | LTE | 26 | 460 | |
| MRPC Special Int. | 81 | 37 | VOL | | 0.20 2 | 143 | 010 | -0.66 | 010 | 010 | LTE | 26 | 460 | |
| MRPC Special Int. | 81 | 44 | WAR | 5 | 0.27 P 3 | 0 | 010 | -0.77 | 010 | 010 | LTE | 26 | 460 | WAR |
| MRPC Special Int. | 81 | 105 | SAI | | 0.14 2 | 74 | UTS | -5.14 | UTS | UTS | UTE | 23 | 460 | |
| MRPC Special Int. | 82 | 5 | VOL | | 0.45 2 | 103 | 010 | +5.30 to +10.91 | 010 | 010 | LTE | 47 | 460 | |
| MRPC Special Int. | 82 | 10 | VOL | | 0.09 2 | 110 | 007 | +7.74 | 007 | 007 | LTE | 39 | 460 | |
| MRPC Special Int. | 82 | 13 | VOL | | 0.12 2 | 62 | 002 | +20.76 | 002 | 002 | LTE | 39 | 460 | |
| MRPC Special Int. | 82 | 29 | WAR | 7 | 0.37 P 3 | 0 | 010 | -0.76 | 010 | 010 | LTE | 62 | 460 | WAR |
| MRPC Special Int. | 82 | 33 | WAR | 9 | 0.39 P 3 | 0 | 010 | -0.73 | 010 | 010 | LTE | 39 | 460 | WAR |
| MRPC Special Int. | 82 | 36 | VOL | | 0.25 2 | 137 | 010 | -0.77 | 010 | 010 | LTE | 26 | 460 | |
| MRPC Special Int. | 82 | 47 | VOL | | 0.26 1 | 97 | 012 | +26.37 | 012 | 012 | LTE | 43 | 460 | |
| MRPC Special Int. | 82 | 53 | VOL | | 0.18 2 | 54 | 014 | +2.26 | 014 | 014 | LTE | 24 | 460 | |
| MRPC Special Int. | 82 | 64 | VOL | | 0.17 2 | 71 | 001 | +1.06 | 001 | 001 | UTE | 4 | 460 | |

ATTACHMENT A-4 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|-------|-----|-----|----------|-----------------|---------|-----|-------|-------|----------|
| MRPC Special Int. | 82 | 125 | VOL | | 0.11 | 2 | 89 | 014 | +1.64 | 014 | 014 | UTE | 23 | 460 |
| MRPC Special Int. | 83 | 4 | VOL | | 0.29 | 2 | 104 | 010 | -0.80 to +10.68 | 010 | 010 | LTE | 47 | 460 |
| MRPC Special Int. | 83 | 11 | VOL | | 0.40 | 2 | 139 | 010 | -0.39 | 010 | 010 | LTE | 39 | 460 |
| MRPC Special Int. | 83 | 12 | VOL | | 0.34 | 2 | 114 | 010 | -0.52 | 010 | 010 | LTE | 39 | 460 |
| MRPC Special Int. | 83 | 19 | VOL | | 0.32 | 2 | 143 | 010 | -0.50 | 010 | 010 | LTE | 39 | 460 |
| MRPC Special Int. | | | WAR | 5 | 0.24 | P 3 | 0 | 010 | -0.55 | 010 | 010 | LTE | 39 | 460 |
| MRPC Special Int. | 83 | 23 | WAR | 8 | 0.41 | P 3 | 0 | 010 | -0.74 | 010 | 010 | LTE | 62 | 460 |
| MRPC Special Int. | 83 | 31 | VOL | | 0.26 | 2 | 128 | 010 | +0.59 | 010 | 010 | LTE | 39 | 460 |
| MRPC Special Int. | | | WAR | 5 | 0.23 | P 3 | 0 | 010 | +0.62 | 010 | 010 | LTE | 39 | 460 |
| MRPC Special Int. | 83 | 66 | VOL | | 0.13 | 2 | 79 | 001 | +1.17 | 001 | 001 | UTE | 4 | 460 |
| MRPC Special Int. | 83 | 131 | VOL | | 0.19 | 2 | 41 | 011 | +1.17 | 011 | 011 | UTE | 21 | 460 |
| MRPC Special Int. | 84 | 37 | VOL | | 0.16 | 2 | 46 | 012 | -1.97 | 012 | 012 | LTE | 26 | 460 |
| MRPC Special Int. | 84 | 56 | VOL | | 0.18 | 2 | 99 | 004 | +16.67 | 004 | 004 | LTE | 24 | 460 |
| MRPC Special Int. | | | VOL | | 0.30 | 2 | 105 | 010 | -14.93 | 010 | 010 | LTE | 24 | 460 |
| MRPC Special Int. | 84 | 72 | VOL | | 0.35 | 2 | 77 | 013 | +0.63 | 013 | 013 | UTE | 4 | 460 |
| MRPC Special Int. | 84 | 74 | VOL | | 0.27 | 2 | 72 | 014 | -10.73 | 014 | 014 | UTE | 4 | 460 |
| MRPC Special Int. | 85 | 27 | VOL | | 0.25 | 2 | 136 | 010 | +0.63 | 010 | 010 | LTE | 39 | 460 |
| MRPC Special Int. | 85 | 54 | WAR | 7 | 0.23 | P 3 | 0 | 014 | +0.72 | 014 | 014 | LTE | 24 | 460 |
| MRPC Special Int. | 85 | 109 | VOL | | 0.17 | 2 | 56 | 003 | -1.62 | 003 | 003 | UTE | 21 | 460 |
| MRPC Special Int. | 85 | 116 | VOL | | 0.27 | 2 | 86 | 014 | +1.09 | 014 | 014 | UTE | 21 | 460 |
| MRPC Special Int. | 86 | 6 | WAR | 8 | 0.37 | P 3 | 128 | 009 | +0.63 | 009 | 009 | LTE | 39 | 460 |
| MRPC Special Int. | 86 | 102 | VOL | | 0.10 | 2 | 66 | 001 | -11.88 | 001 | 001 | UTE | 21 | 460 |
| MRPC Special Int. | 86 | 120 | VOL | | 0.50 | 2 | 56 | 014 | +0.76 | 014 | 014 | UTE | 21 | 460 |
| MRPC Special Int. | 86 | 124 | SAI | | 0.08 | 2 | 91 | 012 | +11.25 | 012 | 012 | UTE | 21 | 460 |
| MRPC Special Int. | 87 | 3 | VOL | | 0.26 | 2 | 75 | 012 | +0.78 | 012 | 012 | LTE | 47 | 460 |
| MRPC Special Int. | 87 | 40 | VOL | | 0.12 | 2 | 90 | 008 | -16.16 | 008 | 008 | LTE | 26 | 460 |
| MRPC Special Int. | 87 | 70 | VOL | | 0.41 | 1 | 145 | 012 | +11.05 | 012 | 012 | UTE | 4 | 460 |
| MRPC Special Int. | 88 | 24 | VOL | | 0.10 | 2 | 34 | 009 | +11.55 | 009 | 009 | LTE | 39 | 460 |
| MRPC Special Int. | | | VOL | | 0.10 | 2 | 63 | 010 | +13.60 | 010 | 010 | LTE | 39 | 460 |
| MRPC Special Int. | 88 | 71 | VOL | | 0.12 | 2 | 104 | 010 | +19.43 | 010 | 010 | UTE | 4 | 460 |
| HL ROLL TRANSITION | 88 | 125 | SAI | | 1.18 | 2 | 14 | UTE | -1.28 | UTE | UTE | UTE | 120 | 460 |
| MRPC Special Int. | 88 | 129 | VOL | | 0.31 | 2 | 102 | UTS | -11.46 | UTS | UTS | LTE | 43 | 460 |
| MRPC Special Int. | 89 | 3 | VOL | | 0.13 | 2 | 87 | 010 | +1.21 | 010 | 010 | LTE | 47 | 460 |
| MRPC Special Int. | | | VOL | | 0.30 | 2 | 92 | 010 | -2.10 | 010 | 010 | LTE | 47 | 460 |
| MRPC Special Int. | 89 | 5 | WAR | 10 | 0.44 | P 3 | 111 | 009 | +0.66 | 009 | 009 | LTE | 39 | 460 |
| MRPC Special Int. | 89 | 69 | VOL | | 0.13 | 2 | 57 | 007 | +14.57 | 007 | 007 | UTE | 4 | 460 |
| MRPC Special Int. | 89 | 127 | VOL | | 0.23 | 2 | 85 | 014 | +0.78 | 014 | 014 | UTE | 21 | 460 |
| MRPC Special Int. | 89 | 128 | VOL | | 0.11 | 2 | 72 | 014 | +1.21 | 014 | 014 | UTE | 21 | 460 |
| MRPC Special Int. | 90 | 75 | VOL | | 0.11 | 2 | 60 | 007 | -1.42 | 007 | 007 | UTE | 4 | 460 |
| MRPC Special Int. | | | VOL | | 0.14 | 2 | 70 | 006 | -5.82 | 006 | 006 | UTE | 4 | 460 |
| MRPC Special Int. | | | VOL | | 0.15 | 2 | 45 | 006 | -4.62 | 006 | 006 | UTE | 4 | 460 |
| MRPC Special Int. | | | VOL | | 0.17 | 2 | 58 | 006 | +16.90 | 006 | 006 | UTE | 4 | 460 |
| MRPC Special Int. | 90 | 116 | VOL | | 0.17 | 2 | 75 | 014 | +0.88 | 014 | 014 | UTE | 21 | 460 |
| MRPC Special Int. | 91 | 126 | VOL | | 0.12 | 2 | 76 | 014 | +1.24 | 014 | 014 | LTE | 43 | 460 |
| HL ROLL TRANSITION | 92 | 78 | VOL | | 0.16 | 2 | 79 | UTE | -1.31 | UTE | UTE | UTE | 67 | 460 |
| MRPC Special Int. | 93 | 48 | VOL | | 0.46 | 2 | 11 | 008 | +19.57 | 008 | 008 | LTE | 24 | 460 |
| MRPC Special Int. | 93 | 55 | VOL | | 0.09 | 2 | 70 | 008 | +12.78 | 008 | 008 | LTE | 24 | 460 |
| MRPC Special Int. | 93 | 109 | VOL | | 0.12 | 2 | 83 | 014 | +1.08 | 014 | 014 | UTE | 21 | 460 |
| MRPC Special Int. | | | VOL | | 0.19 | 2 | 73 | 014 | +0.80 | 014 | 014 | UTE | 21 | 460 |
| MRPC Special Int. | 93 | 118 | VOL | | 0.11 | 2 | 68 | 014 | +0.97 | 014 | 014 | UTE | 21 | 460 |
| MRPC Special Int. | 94 | 3 | WAR | 9 | 0.41 | P 3 | 150 | 010 | +0.73 | 010 | 010 | LTE | 39 | 460 |
| MRPC Special Int. | 94 | 103 | VOL | | 0.10 | 2 | 55 | 010 | -4.89 | 010 | 010 | UTE | 21 | 460 |
| MRPC Special Int. | 95 | 1 | MAI | | 0.17 | 2 | 79 | 015 | +5.06 | 015 | 015 | LTE | 30 | 460 |
| MRPC Special Int. | | | MAI | | 0.21 | 2 | 79 | 015 | +7.58 | 015 | 015 | LTE | 30 | 460 |
| MRPC Special Int. | | | MAI | | 0.21 | 2 | 90 | 015 | +3.43 | 015 | 015 | LTE | 30 | 460 |
| MRPC Special Int. | | | SAI | | 0.14 | 2 | 66 | 015 | +9.47 | 015 | 015 | LTE | 30 | 460 |
| MRPC Special Int. | | | SAI | | 0.35 | 2 | 80 | 015 | +7.01 | 015 | 015 | LTE | 30 | 460 |
| MRPC Special Int. | 95 | 2 | VOL | | 0.30 | 2 | 144 | 010 | -0.65 | 010 | 010 | LTE | 39 | 460 |
| MRPC Special Int. | 95 | 55 | VOL | | 0.12 | 2 | 74 | LTS | +14.42 | LTS | LTS | LTE | 24 | 460 |
| MRPC Special Int. | 95 | 128 | VOL | | 0.25 | 2 | 117 | 008 | -0.37 | 008 | 008 | LTE | 43 | 460 |
| MRPC Special Int. | 96 | 2 | WAR | 7 | 0.59 | P 3 | 0 | 010 | +0.66 | 010 | 010 | LTE | 43 | 460 |
| C/L Tubesheet | 96 | 77 | VOL | | 0.17 | 2 | 53 | LTS | +0.11 | LTS | LTS | LTE | 16 | 460 |
| MRPC Special Int. | 96 | 127 | VOL | | 0.25 | 2 | 101 | 008 | -0.62 | 008 | 008 | LTE | 43 | 460 |
| MRPC Special Int. | 97 | 2 | WAR | 7 | 0.57 | P 3 | 0 | 010 | +0.65 | 010 | 010 | LTE | 43 | 460 |
| MRPC Special Int. | 99 | 11 | SVI | | 1.17 | 2 | 81 | 014 | +0.72 | 014 | 014 | LTE | 39 | 460 |

ATTACHMENT A-4 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | *TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|----------|-----|-----|----------|---------|---------|-----|-------|-------|----------|
| MRPC Special Int. | 99 | 41 | VOL | | 0.26 2 | 23 | 013 | +0.14 | 013 | 013 | LTE | 24 | 460 | |
| MRPC Special Int. | 99 | 126 | WAR | 7 | 0.57 P 3 | 0 | 008 | -0.66 | 008 | 008 | LTE | 43 | 460 | WAR |
| MRPC Special Int. | 100 | 3 | VOL | | 0.13 2 | 117 | 015 | +0.05 | 015 | 015 | LTE | 43 | 460 | |
| MRPC Special Int. | 100 | 43 | WAR | 7 | 0.25 P 3 | 0 | 013 | +0.72 | 013 | 013 | LTE | 24 | 460 | WAR |
| MRPC Special Int. | 101 | 4 | VOL | | 0.50 2 | 149 | 009 | -0.12 | 009 | 009 | LTE | 62 | 460 | |
| MRPC Special Int. | 101 | 44 | VOL | | 0.31 2 | 23 | 014 | +0.41 | 014 | 014 | LTE | 24 | 460 | |
| MRPC Special Int. | 101 | 66 | VOL | | 0.06 2 | 58 | 013 | +15.46 | 013 | 013 | UTE | 15 | 460 | |
| MRPC Special Int. | 101 | 120 | VOL | | 0.37 2 | 81 | 015 | -1.30 | 015 | 015 | UTE | 18 | 460 | |
| MRPC Special Int. | 102 | 20 | VOL | | 0.12 2 | 27 | 013 | +20.89 | 013 | 013 | LTE | 32 | 460 | |
| MRPC Special Int. | 102 | 39 | VOL | | 0.30 2 | 124 | 014 | -0.36 | 014 | 014 | LTE | 24 | 460 | |
| C/L Tubesheet | 102 | 80 | VOL | | 0.10 2 | 107 | LTS | -0.97 | LTS | LTS | LTE | 15 | 460 | |
| MRPC Special Int. | 102 | 121 | WAR | 12 | 0.39 P 3 | 27 | 009 | -0.56 | 009 | 009 | UTE | 18 | 460 | WAR |
| MRPC Special Int. | 103 | 24 | VOL | | 0.13 2 | 52 | 012 | +15.16 | 012 | 012 | LTE | 32 | 460 | |
| MRPC Special Int. | | | VOL | | 0.13 2 | 62 | 013 | +5.46 | 013 | 013 | LTE | 32 | 460 | |
| MRPC Special Int. | 104 | 57 | VOL | | 0.16 2 | 70 | 006 | -10.81 | 006 | 006 | LTE | 24 | 460 | |
| MRPC Special Int. | 104 | 89 | VOL | | 0.11 2 | 40 | 008 | +21.02 | 008 | 008 | UTE | 15 | 460 | |
| MRPC Special Int. | 105 | 53 | VOL | | 0.23 2 | 131 | UTS | +19.61 | UTS | UTS | LTE | 24 | 460 | |
| MRPC Special Int. | 105 | 121 | WAR | 14 | 0.42 P 3 | 48 | 008 | -0.58 | 008 | 008 | UTE | 18 | 460 | WAR |
| MRPC Special Int. | 106 | 4 | WAR | 9 | 0.39 P 3 | 0 | 009 | -0.53 | 009 | 009 | LTE | 32 | 460 | WAR |
| MRPC Special Int. | 106 | 63 | VOL | | 0.14 2 | 49 | 009 | +8.14 | 009 | 009 | UTE | 15 | 460 | |
| MRPC Special Int. | | | VOL | | 0.14 2 | 49 | 009 | +9.15 | 009 | 009 | UTE | 15 | 460 | |
| MRPC Special Int. | 107 | 46 | VOL | | 0.20 2 | 107 | UTS | +16.76 | UTS | UTS | LTE | 24 | 460 | |
| MRPC Special Int. | 107 | 84 | VOL | | 0.13 2 | 84 | 004 | +4.79 | 004 | 004 | UTE | 14 | 460 | |
| MRPC Special Int. | 108 | 85 | VOL | | 0.17 2 | 40 | 008 | +24.12 | 008 | 008 | UTE | 14 | 460 | |
| MRPC Special Int. | 108 | 86 | WAR | 8 | 0.40 P 3 | 0 | 004 | -0.65 | 004 | 004 | UTE | 14 | 460 | WAR |
| MRPC Special Int. | 109 | 2 | VOL | | 0.16 2 | 105 | 015 | +0.16 | 015 | 015 | LTE | 32 | 460 | |
| MRPC Special Int. | 109 | 31 | VOL | | 0.20 2 | 139 | 014 | -0.50 | 014 | 014 | LTE | 24 | 460 | |
| MRPC Special Int. | 109 | 99 | VOL | | 0.26 2 | 53 | 005 | -11.90 | 005 | 005 | UTE | 17 | 460 | |
| MRPC Special Int. | 112 | 16 | VOL | | 0.12 2 | 62 | 003 | +8.40 | 003 | 003 | LTE | 32 | 460 | |
| MRPC Special Int. | 112 | 17 | VOL | | 0.10 2 | 49 | 013 | -3.31 | 013 | 013 | LTE | 32 | 460 | |
| MRPC Special Int. | 112 | 59 | VOL | | 0.13 2 | 80 | 012 | +15.42 | 012 | 012 | LTE | 24 | 460 | |
| HL ROLL TRANSITION | 112 | 78 | MAI | | 0.66 2 | 21 | UTE | -1.18 | UTE | UTE | UTE | 47 | 460 | |
| MRPC Special Int. | 112 | 115 | VOL | | 0.41 2 | 62 | 010 | +0.65 | 010 | 010 | UTE | 17 | 460 | |
| MRPC Special Int. | 113 | 20 | VOL | | 0.16 2 | 51 | 010 | +23.81 | 010 | 010 | LTE | 32 | 460 | |
| MRPC Special Int. | 113 | 89 | VOL | | 0.35 2 | 55 | UTE | -4.28 | UTE | UTE | UTE | 14 | 460 | |
| MRPC Special Int. | 114 | 1 | VOL | | 0.16 2 | 118 | 007 | -0.73 | 007 | 007 | LTE | 30 | 460 | |
| MRPC Special Int. | 114 | 11 | WAR | 8 | 0.35 P 3 | 0 | 014 | +0.84 | 014 | 014 | LTE | 29 | 460 | WAR |
| MRPC Special Int. | 114 | 15 | VOL | | 0.20 2 | 45 | 015 | +21.26 | 015 | 015 | LTE | 29 | 460 | |
| MRPC Special Int. | 114 | 18 | VOL | | 0.16 2 | 57 | 008 | -13.46 | 008 | 008 | LTE | 29 | 460 | |
| HL ROLL TRANSITION | 114 | 52 | MAI | | 1.40 2 | 13 | UTE | -0.37 | UTE | UTE | UTE | 95 | 460 | |
| MRPC Special Int. | 114 | 114 | VOL | | 0.48 2 | 98 | 010 | +0.60 | 010 | 010 | UTE | 17 | 460 | |
| HL ROLL TRANSITION | 114 | 115 | SCI | | 1.35 P 1 | 19 | UTE | -0.28 | UTE | UTE | UTE | 123 | 460 | |
| MRPC Special Int. | 115 | 4 | VOL | | 0.06 2 | 77 | 014 | +1.15 | 014 | 014 | UTE | 37 | 460 | |
| HL ROLL TRANSITION | 115 | 47 | SCI | | 1.37 P 1 | 10 | UTE | -0.49 | UTE | UTS | UTE | 52 | 460 | |
| MRPC Special Int. | 115 | 65 | VOL | | 0.10 2 | 37 | 014 | +2.44 | 014 | 014 | UTE | 7 | 460 | |
| MRPC Special Int. | 115 | 97 | VOL | | 0.21 2 | 83 | 014 | +1.22 | 014 | 014 | UTE | 14 | 460 | |
| MRPC Special Int. | 115 | 98 | VOL | | 0.19 2 | 68 | 013 | +12.62 | 013 | 013 | UTE | 14 | 460 | |
| MRPC Special Int. | 115 | 110 | WAR | 18 | 1.10 P 3 | 0 | 009 | -0.72 | 009 | 009 | UTE | 14 | 460 | WAR |
| MRPC Special Int. | 115 | 111 | WAR | 23 | 1.35 P 3 | 0 | 008 | -0.50 | 008 | 008 | UTE | 14 | 460 | WAR |
| MRPC Special Int. | 116 | 49 | VOL | | 0.17 2 | 59 | 012 | +0.39 | 012 | 012 | LTE | 24 | 460 | |
| MRPC Special Int. | 117 | 3 | VOL | | 0.37 2 | 99 | 009 | +0.56 | 009 | 009 | UTE | 37 | 460 | |
| MRPC Special Int. | | | WAR | 10 | 0.37 P 3 | 77 | 009 | +0.58 | 009 | 009 | UTE | 37 | 460 | WAR |
| MRPC Special Int. | 117 | 19 | VOL | | 0.16 2 | 47 | 004 | +5.04 | 004 | 004 | UTE | 37 | 460 | |
| MRPC Special Int. | 117 | 56 | VOL | | 0.10 2 | 71 | UTS | -21.20 | UTS | UTS | UTE | 7 | 460 | |
| MRPC Special Int. | 117 | 106 | VOL | | 0.33 2 | 124 | 010 | +0.70 | 010 | 010 | UTE | 14 | 460 | |
| MRPC Special Int. | 118 | 56 | ODI | 7 | 0.32 P 3 | 155 | 004 | -0.64 | 004 | 004 | UTE | 7 | 460 | |
| MRPC Special Int. | 118 | 86 | WAR | 12 | 0.62 P 3 | 0 | 004 | -0.79 | 004 | 004 | UTE | 14 | 460 | WAR |
| MRPC H/L Plugs | 118 | 89 | SAI | | 11.43 1 | 7 | UTE | -1.72 | UTE | UTE | UTE | 5 | 410 | |
| MRPC Special Int. | 118 | 99 | VOL | | 0.28 2 | 84 | 015 | -7.49 | 015 | 015 | UTE | 14 | 460 | |
| MRPC Special Int. | 118 | 106 | VOL | | 0.17 2 | 38 | 014 | +16.36 | 014 | 014 | UTE | 14 | 460 | |
| HL ROLL TRANSITION | 119 | 70 | SAI | | 1.74 2 | 16 | UTE | -0.31 | UTE | UTE | UTE | 112 | 460 | |
| MRPC Special Int. | 119 | 88 | VOL | | 0.21 2 | 53 | 014 | +0.35 | 014 | 014 | UTE | 14 | 460 | |
| MRPC Special Int. | 119 | 90 | VOL | | 0.12 2 | 38 | 004 | -5.92 | 004 | 004 | UTE | 14 | 460 | |
| HL ROLL TRANSITION | 119 | 92 | MAI | | 1.47 2 | 18 | UTE | -0.32 | UTE | UTE | UTE | 115 | 460 | |
| MRPC Special Int. | 119 | 98 | VOL | | 0.12 2 | 70 | 002 | -9.55 | 002 | 002 | UTE | 14 | 460 | |

ATTACHMENT A-4 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | %TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|-------|-----|-----|----------|------------------|---------|-----|-------|-------|----------|
| MRPC Special Int. | 119 | 106 | VOL | | 0.38 | 2 | 89 | 008 | -0.59 | 008 | 008 | UTE | 14 | 460 |
| HL ROLL TRANSITION | 120 | 72 | VOL | | 0.27 | 2 | 92 | UTE | -1.19 | UTE | UTE | UTE | 112 | 460 |
| MRPC Special Int. | 120 | 78 | VOL | | 0.29 | 2 | 93 | 013 | +0.63 | 013 | 013 | UTE | 7 | 460 |
| MRPC Special Int. | 120 | 105 | WAR | 11 | 0.55 | P 3 | 0 | 010 | -0.14 | 010 | 010 | UTE | 13 | 460 |
| MRPC Special Int. | | | WAR | 16 | 0.82 | P 3 | 0 | 008 | -0.57 | 008 | 008 | UTE | 13 | 460 |
| MRPC Special Int. | 121 | 78 | VOL | | 0.07 | 2 | 49 | UTS | -9.27 | UTS | UTS | UTE | 7 | 460 |
| MRPC Special Int. | 122 | 3 | VOL | | 0.18 | 2 | 85 | 009 | -0.72 | 009 | 009 | UTE | 37 | 460 |
| MRPC Special Int. | | | VOL | | 0.33 | 2 | 100 | 009 | +0.58 | 009 | 009 | UTE | 37 | 460 |
| MRPC Special Int. | 122 | 47 | VOL | | 0.14 | 2 | 46 | 009 | +6.21 | 009 | 009 | LTE | 20 | 460 |
| MRPC Special Int. | 122 | 58 | VOL | | 0.09 | 2 | 61 | 013 | +9.01 | 013 | 013 | UTE | 7 | 460 |
| MRPC Special Int. | 122 | 82 | VOL | | 0.06 | 2 | 59 | 015 | -11.46 | 015 | 015 | UTE | 7 | 460 |
| MRPC Special Int. | 122 | 84 | VOL | | 0.11 | 2 | 81 | 005 | +8.79 | 005 | 005 | UTE | 7 | 460 |
| MRPC Special Int. | | | VOL | | 0.13 | 2 | 68 | 012 | -8.40 | 012 | 012 | LTE | 75 | 460 |
| MRPC Special Int. | | | VOL | | 0.18 | 2 | 71 | 007 | +10.55 | 007 | 007 | LTE | 75 | 460 |
| MRPC Special Int. | 122 | 103 | VOL | | 0.30 | 2 | 99 | 008 | -0.67 | 008 | 008 | UTE | 12 | 460 |
| MRPC Special Int. | 122 | 104 | VOL | | 0.33 | 2 | 53 | 010 | +0.63 | 010 | 010 | UTE | 12 | 460 |
| MRPC Special Int. | 123 | 57 | VOL | | 0.16 | 2 | 57 | 011 | +24.88 | 011 | 011 | UTE | 8 | 460 |
| MRPC H/L Plugs | 123 | 95 | SAI | | 7.41 | 1 | 17 | UTE | -1.73 | UTE | UTE | UTE | 6 | 410 |
| MRPC Special Int. | 123 | 98 | VOL | | 0.43 | 2 | 49 | 009 | -0.45 | 009 | 009 | UTE | 12 | 460 |
| MRPC Special Int. | 123 | 100 | VOL | | 0.07 | 2 | 76 | 014 | +1.44 | 014 | 014 | UTE | 12 | 460 |
| MRPC Special Int. | | | VOL | | 0.09 | 2 | 81 | 014 | +0.78 | 014 | 014 | UTE | 12 | 460 |
| MRPC Special Int. | 123 | 103 | VOL | | 0.22 | 2 | 145 | 004 | -0.74 | 004 | 004 | UTE | 12 | 460 |
| MRPC Special Int. | 124 | 3 | WAR | 6 | 0.24 | P 3 | 84 | 009 | +0.53 | 009 | 009 | UTE | 37 | 460 |
| MRPC Special Int. | 124 | 6 | VOL | | 0.10 | 2 | 36 | 012 | +10.17 | 012 | 012 | UTE | 37 | 460 |
| MRPC Special Int. | 124 | 94 | VOL | | 0.18 | 2 | 119 | 014 | +1.57 | 014 | 014 | UTE | 12 | 460 |
| MRPC Special Int. | 124 | 100 | VOL | | 0.19 | 2 | 62 | 007 | +16.13 | 007 | 007 | UTE | 12 | 460 |
| MRPC Special Int. | 125 | 7 | WAR | 4 | 0.14 | P 3 | 0 | 009 | +0.68 | 009 | 009 | UTE | 37 | 460 |
| MRPC Special Int. | | | WAR | 12 | 0.42 | P 3 | 0 | 009 | -0.68 | 009 | 009 | UTE | 37 | 460 |
| MRPC Special Int. | 125 | 27 | VOL | | 0.08 | 2 | 80 | 003 | +12.08 | 003 | 003 | LTE | 24 | 460 |
| MRPC Special Int. | 125 | 28 | VOL | | 0.07 | 2 | 85 | LTS | +21.50 to +22.30 | LTS | LTS | LTE | 24 | 460 |
| MRPC Special Int. | 125 | 52 | WAR | 13 | 0.61 | P 3 | 0 | 004 | -0.82 | 004 | 004 | UTE | 8 | 460 |
| MRPC Special Int. | 125 | 54 | VOL | | 0.17 | 2 | 45 | 011 | -13.33 | 011 | 011 | UTE | 23 | 460 |
| MRPC Special Int. | | | VOL | | 0.31 | 2 | 80 | 015 | +12.34 | 015 | 015 | UTE | 8 | 460 |
| MRPC Special Int. | 125 | 60 | VOL | | 0.07 | 2 | 80 | 008 | -10.46 | 008 | 008 | UTE | 8 | 460 |
| MRPC Special Int. | 125 | 90 | VOL | | 0.13 | 2 | 89 | 010 | -10.07 | 010 | 010 | UTE | 12 | 460 |
| MRPC Special Int. | 125 | 99 | VOL | | 0.31 | 2 | 89 | 014 | +0.85 | 014 | 014 | UTE | 12 | 460 |
| MRPC Special Int. | 125 | 100 | VOL | | 0.34 | 2 | 89 | 010 | +18.38 | 010 | 010 | UTE | 12 | 460 |
| MRPC Special Int. | 126 | 7 | WAR | 14 | 0.56 | P 3 | 135 | 009 | +0.60 | 009 | 009 | UTE | 37 | 460 |
| MRPC Special Int. | 126 | 28 | VOL | | 0.25 | 2 | 71 | 004 | -0.76 | 004 | 004 | LTE | 24 | 460 |
| MRPC Special Int. | 126 | 40 | VOL | | 0.22 | 2 | 66 | 014 | +0.82 | 014 | 014 | LTE | 20 | 460 |
| MRPC Special Int. | 126 | 56 | VOL | | 0.13 | 2 | 87 | 013 | +12.25 | 013 | 013 | UTE | 8 | 460 |
| HL ROLL TRANSITION | 126 | 77 | SCI | | 0.60 | P 1 | 27 | UTE | -0.24 | UTE | UTS | UTE | 112 | 460 |
| MRPC Special Int. | 126 | 97 | VOL | | 0.15 | 2 | 89 | 005 | +1.11 | 005 | 005 | UTE | 11 | 460 |
| MRPC Special Int. | 127 | 6 | VOL | | 0.43 | 2 | 112 | 009 | -0.72 | 009 | 009 | UTE | 42 | 460 |
| MRPC Special Int. | 127 | 47 | VOL | | 0.20 | 2 | 52 | 014 | +1.99 | 014 | 014 | LTE | 20 | 460 |
| MRPC Special Int. | 127 | 55 | VOL | | 0.15 | 2 | 57 | 013 | +20.57 | 013 | 013 | UTE | 9 | 460 |
| MRPC Special Int. | 128 | 52 | VOL | | 0.72 | 2 | 71 | 003 | +12.55 | 003 | 003 | UTE | 9 | 460 |
| MRPC Special Int. | 129 | 2 | WAR | 8 | 0.27 | P 3 | 86 | 010 | +0.69 | 010 | 010 | UTE | 42 | 460 |
| MRPC Special Int. | 129 | 4 | VOL | | 0.21 | 2 | 117 | 004 | -0.79 | 004 | 004 | UTE | 42 | 460 |
| MRPC Special Int. | 129 | 18 | VOL | | 0.98 | 2 | 3 | 011 | +13.38 | 011 | 011 | LTE | 24 | 460 |
| MRPC Special Int. | 129 | 49 | WAR | 4 | 0.14 | P 3 | 0 | 004 | -0.81 | 004 | 004 | UTE | 9 | 460 |
| MRPC Special Int. | 129 | 94 | WAR | 13 | 0.42 | P 3 | 0 | 010 | -0.54 | 010 | 010 | UTE | 11 | 460 |
| MRPC Special Int. | 130 | 5 | VOL | | 0.44 | 2 | 138 | 010 | +0.53 | 010 | 010 | UTE | 42 | 460 |
| MRPC Special Int. | 130 | 9 | VOL | | 0.26 | 2 | 98 | 004 | -0.82 | 004 | 004 | UTE | 42 | 460 |
| MRPC Special Int. | 130 | 18 | VOL | | 0.12 | 2 | 58 | 011 | -14.87 | 011 | 011 | LTE | 24 | 460 |
| MRPC Special Int. | 130 | 57 | VOL | | 0.10 | 2 | 61 | 011 | +29.33 | 011 | 010 | UTE | 9 | 460 |
| MRPC Special Int. | 130 | 81 | VOL | | 0.16 | 2 | 44 | 009 | -12.96 | 009 | 009 | UTE | 11 | 460 |
| MRPC Special Int. | 130 | 91 | WAR | 8 | 0.26 | P 3 | 0 | 010 | +0.58 | 010 | 010 | UTE | 11 | 460 |
| MRPC Special Int. | 131 | 5 | VOL | | 0.39 | 2 | 127 | 010 | +0.64 | 010 | 010 | UTE | 42 | 460 |
| MRPC Special Int. | 131 | 63 | WAR | 3 | 0.12 | P 3 | 0 | 002 | -0.33 | 002 | 002 | UTE | 9 | 460 |
| MRPC Special Int. | 132 | 9 | VOL | | 0.90 | 1 | 118 | LTE | +8.07 | LTE | LTE | UTE | 42 | 460 |
| MRPC Special Int. | 132 | 49 | VOL | | 0.27 | 2 | 68 | 015 | +3.18 | 015 | 015 | UTE | 9 | 460 |
| MRPC Special Int. | 132 | 85 | WAR | 9 | 0.42 | P 3 | 0 | 011 | +0.70 | 011 | 011 | UTE | 11 | 460 |
| MRPC Special Int. | 133 | 5 | VOL | | 0.23 | 2 | 67 | 010 | +0.07 | 010 | 010 | UTE | 42 | 460 |
| MRPC Special Int. | | | VOL | | 0.34 | 2 | 118 | 010 | -0.79 | 010 | 010 | UTE | 42 | 460 |

ATTACHMENT A-4 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | *TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|-------------------|-----|------|-----|-----|----------|-----|-----|----------|------------------|---------|-----|-------|--------|----------|
| MRPC Special Int. | | | | | VOL | | | 131 010 | +0.42 | 010 | 010 | UTE | 42 460 | |
| MRPC Special Int. | 133 | 6 | MVI | | 0.32 2 | | 92 | 009 | +17.31 to +25.19 | 009 | 009 | UTE | 42 460 | |
| MRPC Special Int. | 133 | 9 | WAR | 11 | 0.35 P 3 | | 89 | 009 | +0.60 | 009 | 009 | UTE | 42 460 | WAR |
| MRPC Special Int. | 133 | 28 | VOL | | 0.15 2 | | 85 | UTS | +18.35 | UTS | UTS | LTE | 24 460 | |
| MRPC Special Int. | | | VOL | | 0.22 2 | | 110 | UTS | +17.70 | UTS | UTS | LTE | 24 460 | |
| MRPC Special Int. | 133 | 35 | SAI | | 0.19 2 | | 85 | 002 | +16.39 | 002 | 002 | LTE | 24 460 | |
| MRPC Special Int. | 133 | 86 | WAR | 6 | 0.26 P 3 | | 0 | 010 | +0.47 | 010 | 010 | UTE | 11 460 | WAR |
| MRPC Special Int. | 134 | 2 | VOL | | 0.36 2 | | 148 | 004 | -0.77 | 004 | 004 | UTE | 42 460 | |
| MRPC Special Int. | 134 | 6 | VOL | | 0.28 2 | | 103 | 010 | +0.53 | 010 | 010 | UTE | 42 460 | |
| MRPC Special Int. | 134 | 76 | VOL | | 0.06 2 | | 52 | 015 | -9.00 | 015 | 015 | UTE | 11 460 | |
| MRPC Special Int. | 135 | 3 | MVI | | 0.17 P 1 | | 97 | 010 | -3.96 to -0.95 | 010 | 010 | UTE | 42 460 | |
| MRPC Special Int. | 135 | 5 | VOL | | 0.27 2 | | 102 | 010 | +0.71 | 010 | 010 | UTE | 42 460 | |
| MRPC Special Int. | 135 | 6 | VOL | | 0.23 2 | | 89 | 010 | -0.63 | 010 | 010 | UTE | 42 460 | |
| MRPC Special Int. | | | MVI | | 0.48 P 1 | | 87 | 009 | +16.47 to +24.05 | 009 | 009 | UTE | 42 460 | |
| MRPC Special Int. | 135 | 33 | VOL | | 0.11 2 | | 65 | 012 | -1.35 | 012 | 012 | LTE | 20 460 | |
| MRPC Special Int. | 135 | 36 | WAR | 3 | 0.17 P 3 | | 98 | 004 | -0.68 | 004 | 004 | LTE | 20 460 | WAR |
| MRPC Special Int. | 136 | 37 | VOL | | 0.12 2 | | 79 | 002 | +18.36 | 002 | 002 | LTE | 20 460 | |
| MRPC Special Int. | 136 | 69 | VOL | | 0.24 P 3 | | 149 | 003 | +0.84 | 003 | 003 | UTE | 9 460 | |
| MRPC Special Int. | 136 | 70 | VOL | | 0.29 2 | | 93 | 003 | +0.85 | 003 | 003 | UTE | 9 460 | |
| MRPC Special Int. | 136 | 80 | SAI | | 0.07 2 | | 52 | 015 | -1.70 | 015 | 015 | UTE | 11 460 | |
| MRPC Special Int. | | | SAI | | 0.10 2 | | 79 | 015 | -2.72 | 015 | 015 | UTE | 11 460 | |
| MRPC Special Int. | 137 | 42 | VOL | | 0.26 2 | | 91 | 014 | +0.77 | 014 | 014 | UTE | 9 460 | |
| MRPC Special Int. | 137 | 67 | VOL | | 2.27 1 | | 133 | 001 | +4.03 | 001 | 001 | UTE | 9 460 | |
| MRPC Special Int. | 137 | 72 | VOL | | 0.05 2 | | 180 | 011 | -15.71 | 011 | 011 | UTE | 11 460 | |
| MRPC Special Int. | | | WAR | 2 | 0.06 P 3 | | 0 | 009 | -0.49 | 009 | 009 | UTE | 11 460 | WAR |
| MRPC Special Int. | 138 | 21 | VOL | | 0.09 2 | | 43 | 001 | -5.37 | 001 | 001 | LTE | 20 460 | |
| MRPC Special Int. | 138 | 68 | VOL | | 0.22 2 | | 79 | 003 | +0.92 | 003 | 003 | UTE | 9 460 | |
| MRPC Special Int. | 138 | 70 | VOL | | 0.09 2 | | 49 | 014 | +4.31 | 014 | 014 | UTE | 11 460 | |
| MRPC Special Int. | | | VOL | | 0.10 2 | | 47 | 014 | +5.04 | 014 | 014 | UTE | 11 460 | |
| MRPC Special Int. | 139 | 1 | MVI | | 0.32 P 1 | | 92 | 010 | +10.64 to +14.01 | 010 | 010 | UTE | 42 460 | |
| MRPC Special Int. | 139 | 29 | VOL | | 0.16 2 | | 99 | 009 | +7.54 | 009 | 009 | LTE | 20 460 | |
| MRPC Special Int. | 139 | 68 | VOL | | 0.21 2 | | 107 | 003 | +0.78 | 003 | 003 | UTE | 9 460 | |
| MRPC H/L Plugs | 140 | 26 | MAI | | 18.45 1 | | 33 | UTE | -2.03 | UTE | UTE | UTE | 2 410 | |
| MRPC Special Int. | 140 | 27 | VOL | | 0.09 2 | | 44 | 010 | -1.28 | 010 | 010 | LTE | 20 460 | |
| MRPC Special Int. | 140 | 51 | VOL | | 0.17 2 | | 98 | 015 | +9.78 | 015 | 015 | UTE | 9 460 | |
| MRPC Special Int. | | | VOL | | 0.22 2 | | 94 | 015 | +10.58 | 015 | 015 | UTE | 9 460 | |
| MRPC Special Int. | 141 | 17 | VOL | | 0.08 2 | | 50 | 015 | -3.60 | 015 | 015 | LTE | 20 460 | |
| MRPC Special Int. | 141 | 27 | VOL | | 0.09 2 | | 43 | 013 | -7.27 | 013 | 013 | LTE | 20 460 | |
| MRPC Special Int. | 141 | 62 | VOL | | 1.82 1 | | 147 | LTS | +18.68 | LTS | LTS | UTE | 9 460 | |
| MRPC Special Int. | | | VOL | | 1.87 1 | | 143 | LTS | +7.29 | LTS | LTS | UTE | 9 460 | |
| MRPC Special Int. | | | VOL | | 2.29 1 | | 135 | LTS | +9.07 | LTS | LTS | UTE | 9 460 | |
| MRPC Special Int. | | | VOL | | 3.12 1 | | 126 | 002 | +8.84 | 002 | 002 | UTE | 9 460 | |
| MRPC Special Int. | | | VOL | | 3.77 1 | | 136 | 002 | +10.21 | 002 | 002 | UTE | 9 460 | |
| MRPC Special Int. | 142 | 5 | WAR | 4 | 0.22 P 3 | | 121 | 009 | +0.54 | 009 | 009 | LTE | 20 460 | WAR |
| MRPC Special Int. | 142 | 8 | WAR | 7 | 0.38 P 3 | | 0 | 009 | -0.57 | 009 | 009 | LTE | 20 460 | WAR |
| MRPC Special Int. | 142 | 27 | VOL | | 0.42 2 | | 88 | 006 | -11.62 | 006 | 006 | LTE | 20 460 | |
| MRPC Special Int. | 142 | 62 | VOL | | 0.12 2 | | 42 | 015 | +8.36 | 015 | 015 | UTE | 10 460 | |
| MRPC Special Int. | 142 | 63 | VOL | | 0.10 2 | | 56 | 010 | -10.44 | 010 | 010 | UTE | 10 460 | |
| MRPC Special Int. | | | VOL | | 0.13 2 | | 62 | 010 | -8.71 | 010 | 010 | UTE | 10 460 | |
| MRPC Special Int. | | | VOL | | 0.14 2 | | 75 | 005 | +16.42 | 005 | 005 | UTE | 10 460 | |
| MRPC Special Int. | 142 | 65 | VOL | | 0.37 2 | | 125 | 015 | +13.29 | 015 | 015 | UTE | 11 460 | |
| MRPC Special Int. | | | VOL | | 0.50 2 | | 131 | 015 | +12.64 | 015 | 015 | UTE | 11 460 | |
| MRPC Special Int. | 143 | 3 | VOL | | 0.10 2 | | 30 | 011 | +18.76 | 011 | 011 | LTE | 20 460 | |
| MRPC Special Int. | 143 | 6 | VOL | | 0.20 2 | | 58 | 003 | +21.23 | 003 | 003 | LTE | 20 460 | |
| MRPC Special Int. | 143 | 13 | WAR | 7 | 0.37 P 3 | | 0 | 006 | -0.47 | 006 | 006 | LTE | 20 460 | WAR |
| MRPC Special Int. | 143 | 25 | WAR | 10 | 0.51 P 3 | | 0 | 009 | -0.74 | 009 | 009 | LTE | 20 460 | WAR |
| MRPC Special Int. | 143 | 33 | VOL | | 0.10 2 | | 61 | 003 | -2.62 | 003 | 003 | UTE | 10 460 | |
| MRPC Special Int. | 143 | 49 | VOL | | 0.17 2 | | 54 | 010 | -9.86 | 010 | 010 | UTE | 10 460 | |
| MRPC Special Int. | 143 | 52 | VOL | | 0.16 2 | | 97 | UTS | +16.33 | UTE | UTS | UTE | 10 460 | |
| MRPC Special Int. | 144 | 14 | WAR | 13 | 0.69 P 3 | | 0 | 009 | -0.47 | 009 | 009 | LTE | 20 460 | WAR |
| MRPC Special Int. | 144 | 16 | VOL | | 0.10 2 | | 44 | 011 | -11.36 | 011 | 011 | LTE | 20 460 | |
| MRPC Special Int. | 144 | 40 | WAR | 11 | 0.36 P 3 | | 109 | 009 | +0.62 | 009 | 009 | UTE | 10 460 | WAR |
| MRPC Special Int. | 144 | 52 | VOL | | 0.18 2 | | 125 | 009 | -0.01 | 009 | 009 | UTE | 23 460 | |
| MRPC Special Int. | 145 | 37 | WAR | 10 | 0.33 P 3 | | 0 | 009 | +0.44 | 009 | 009 | UTE | 10 460 | WAR |
| MRPC Special Int. | 145 | 41 | WAR | 9 | 0.29 P 3 | | 113 | 009 | +0.71 | 009 | 009 | UTE | 10 460 | WAR |

ATTACHMENT A-4 - LIST OF IMPERFECTIONS - MRPC/PLUS POINT

OCONEE 90 DAY NRC REPORT

| TEST TYPE | ROW | TUBE | IND | *TW | VOLTS | CHN | DEG | LOCATION | EXTENT1 | EXTENT2 | LEG | TAPE# | PROBE | COMMENTS |
|--------------------|-----|------|-----|-----|-------|-----|-----|----------|---------|---------|-----|-------|---------|----------|
| MRPC Special Int. | 145 | 42 | WAR | 14 | 0.49 | P 3 | 77 | 009 | +0.68 | 009 | 009 | UTE | 10 460 | WAR |
| MRPC Special Int. | 145 | 44 | WAR | 10 | 0.34 | P 3 | 112 | 009 | +0.64 | 009 | 009 | UTE | 10 460 | WAR |
| MRPC Special Int. | 145 | 46 | WAR | 11 | 0.37 | P 3 | 65 | 009 | +0.74 | 009 | 009 | UTE | 10 460 | WAR |
| MRPC Special Int. | 145 | 48 | WAR | 8 | 0.27 | P 3 | 43 | 009 | +0.71 | 009 | 009 | UTE | 10 460 | WAR |
| MRPC Special Int. | 145 | 49 | WAR | 14 | 0.51 | P 3 | 135 | 010 | +0.68 | 010 | 010 | UTE | 10 460 | WAR |
| MRPC Special Int. | 145 | 50 | VOL | | 0.17 | 2 | 44 | 011 | +20.62 | 011 | 011 | UTE | 10 460 | |
| MRPC Special Int. | 145 | 51 | WAR | 11 | 0.38 | P 3 | 124 | 010 | +0.68 | 010 | 010 | UTE | 10 460 | WAR |
| MRPC Special Int. | 146 | 10 | WAR | 4 | 0.22 | P 3 | 47 | 008 | +0.50 | 008 | 008 | LTE | 20 460 | WAR |
| MRPC Special Int. | 146 | 11 | VOL | | 0.13 | 2 | 76 | 014 | +1.31 | 014 | 014 | LTE | 20 460 | |
| MRPC Special Int. | 146 | 44 | WAR | 12 | 0.42 | P 3 | 67 | 010 | +0.67 | 010 | 010 | UTE | 10 460 | WAR |
| MRPC Special Int. | 146 | 48 | WAR | 13 | 0.46 | P 3 | 149 | 010 | +0.59 | 010 | 010 | UTE | 10 460 | WAR |
| MRPC Special Int. | 147 | 43 | VOL | | 0.18 | 2 | 78 | 014 | +1.12 | 014 | 014 | UTE | 10 460 | |
| MRPC Special Int. | 148 | 23 | VOL | | 0.10 | 2 | 44 | 012 | -7.33 | 012 | 012 | UTE | 10 460 | |
| MRPC Special Int. | 148 | 25 | VOL | | 0.07 | 2 | 65 | 013 | +5.43 | 013 | 013 | UTE | 10 460 | |
| MRPC Special Int. | 148 | 28 | WAR | 4 | 0.14 | P 3 | 75 | 004 | -0.74 | 004 | 004 | UTE | 10 460 | WAR |
| MRPC Special Int. | 148 | 34 | VOL | | 0.12 | 2 | 93 | 015 | +0.73 | 015 | 015 | UTE | 10 460 | |
| MRPC Special Int. | | | VOL | | 0.16 | 2 | 45 | 009 | +12.26 | 009 | 009 | UTE | 10 460 | |
| MRPC Special Int. | 148 | 35 | VOL | | 0.14 | 2 | 71 | 010 | +12.56 | 010 | 010 | UTE | 10 460 | |
| MRPC Special Int. | | | VOL | | 0.18 | 2 | 71 | 010 | +14.46 | 010 | 010 | UTE | 10 460 | |
| MRPC Special Int. | 148 | 36 | VOL | | 0.15 | 2 | 123 | 015 | -0.35 | 015 | 015 | UTE | 10 460 | |
| MRPC Special Int. | 148 | 37 | VOL | | 0.19 | 2 | 96 | 015 | +0.34 | 015 | 015 | UTE | 10 460 | |
| MRPC Special Int. | 149 | 1 | VOL | | 0.14 | 2 | 110 | 015 | +13.72 | 015 | 015 | LTE | 20 460 | |
| MRPC Special Int. | | | VOL | | 0.21 | 2 | 85 | 015 | +15.24 | 015 | 015 | LTE | 20 460 | |
| MRPC H/L Plugs | 149 | 18 | MAI | | 12.40 | 1 | 11 | UTE | -0.60 | UTE | UTE | UTE | 8 410 | |
| MRPC Special Int. | 149 | 29 | VOL | | 0.14 | 2 | 89 | 015 | +0.53 | 015 | 015 | UTE | 10 460 | |
| MRPC Special Int. | 149 | 30 | WAR | 9 | 0.28 | P 3 | 0 | 010 | +0.56 | 010 | 010 | UTE | 10 460 | WAR |
| MRPC Special Int. | | | WAR | 10 | 0.34 | P 3 | 0 | 010 | -0.60 | 010 | 010 | UTE | 10 460 | WAR |
| MRPC Special Int. | | | WAR | 15 | 0.50 | P 3 | 0 | 011 | +0.76 | 011 | 011 | UTE | 10 460 | WAR |
| MRPC Special Int. | 150 | 17 | VOL | | 0.09 | 2 | 110 | 014 | +5.48 | 014 | 014 | UTE | 11 460 | |
| MRPC Special Int. | | | WAR | 8 | 0.38 | P 3 | 0 | 010 | +0.57 | 010 | 010 | UTE | 11 460 | WAR |
| MRPC Special Int. | 150 | 18 | SAI | | 0.14 | 2 | 35 | 015 | +7.21 | 015 | 015 | UTE | 11 460 | |
| MRPC Special Int. | | | SAI | | 0.16 | 2 | 65 | 015 | +8.43 | 015 | 015 | UTE | 11 460 | |
| HL ROLL TRANSITION | 150 | 19 | SCI | | 1.60 | P 1 | 15 | UTE | -0.23 | UTE | UTS | UTE | 107 460 | |
| MRPC Special Int. | 150 | 26 | VOL | | 0.35 | 2 | 99 | 013 | +4.55 | 013 | 013 | UTE | 11 460 | |
| MRPC Special Int. | 151 | 6 | VOL | | 0.34 | 2 | 150 | 013 | -0.63 | 013 | 013 | LTE | 20 460 | |
| MRPC Special Int. | 151 | 12 | SAI | | 0.08 | 2 | 102 | 015 | +9.92 | 015 | 015 | UTE | 11 460 | |
| MRPC Special Int. | | | SAI | | 0.10 | 2 | 94 | 015 | +1.74 | 015 | 015 | UTE | 11 460 | |
| MRPC Special Int. | | | SAI | | 0.16 | 2 | 88 | 015 | +7.56 | 015 | 015 | UTE | 11 460 | |
| MRPC Special Int. | | | SAI | | 0.17 | 2 | 103 | 015 | +7.85 | 015 | 015 | UTE | 11 460 | |
| MRPC Special Int. | | | SAI | | 0.18 | 2 | 86 | 015 | +9.01 | 015 | 015 | UTE | 11 460 | |
| MRPC Special Int. | | | SAI | | 0.18 | 2 | 123 | 015 | +8.29 | 015 | 015 | UTE | 11 460 | |
| MRPC Special Int. | | | SAI | | 0.19 | 2 | 84 | 015 | +9.17 | 015 | 015 | UTE | 11 460 | |
| MRPC Special Int. | | | SAI | | 0.31 | 2 | 70 | 015 | +8.62 | 015 | 015 | UTE | 11 460 | |
| MRPC Special Int. | 151 | 16 | VOL | | 0.37 | 2 | 109 | 015 | -1.28 | 015 | 015 | UTE | 11 460 | |

Total Indications Found = 824

Total Tubes Found = 682

FTI TUBAN II (Version 2.3)

05/09/2000 08:50:05

Oconee Nuclear Station - Unit Three

S/G A

04/00 RFO

Page 1 of 3

ATTACHMENT A - 5 - PLUGGED TUBES

COUNT ROW TUBE

| | | |
|-----|----|-----|
| 1. | 1 | 2 |
| 2. | 3 | 32 |
| 3. | 5 | 41 |
| 4. | 6 | 8 |
| 5. | 6 | 15 |
| 6. | 7 | 14 |
| 7. | 7 | 17 |
| 8. | 8 | 13 |
| 9. | 9 | 14 |
| 10. | 9 | 15 |
| 11. | 9 | 55 |
| 12. | 10 | 57 |
| 13. | 12 | 65 |
| 14. | 13 | 67 |
| 15. | 13 | 69 |
| 16. | 14 | 70 |
| 17. | 17 | 35 |
| 18. | 20 | 85 |
| 19. | 22 | 20 |
| 20. | 25 | 91 |
| 21. | 27 | 3 |
| 22. | 34 | 70 |
| 23. | 35 | 10 |
| 24. | 44 | 59 |
| 25. | 44 | 60 |
| 26. | 45 | 71 |
| 27. | 47 | 117 |
| 28. | 53 | 53 |
| 29. | 55 | 72 |
| 30. | 56 | 50 |
| 31. | 57 | 102 |
| 32. | 59 | 40 |
| 33. | 61 | 1 |
| 34. | 65 | 70 |
| 35. | 66 | 37 |
| 36. | 66 | 73 |
| 37. | 66 | 131 |
| 38. | 67 | 103 |
| 39. | 69 | 98 |
| 40. | 69 | 130 |
| 41. | 69 | 132 |
| 42. | 70 | 55 |
| 43. | 70 | 74 |
| 44. | 72 | 98 |
| 45. | 73 | 31 |
| 46. | 73 | 123 |

COUNT ROW TUBE

| | | |
|-----|-----|-----|
| 47. | 74 | 15 |
| 48. | 74 | 56 |
| 49. | 74 | 93 |
| 50. | 76 | 98 |
| 51. | 76 | 114 |
| 52. | 77 | 69 |
| 53. | 77 | 117 |
| 54. | 78 | 119 |
| 55. | 78 | 126 |
| 56. | 80 | 30 |
| 57. | 80 | 95 |
| 58. | 80 | 106 |
| 59. | 81 | 1 |
| 60. | 81 | 43 |
| 61. | 81 | 95 |
| 62. | 81 | 124 |
| 63. | 82 | 17 |
| 64. | 83 | 3 |
| 65. | 83 | 45 |
| 66. | 84 | 121 |
| 67. | 84 | 122 |
| 68. | 85 | 124 |
| 69. | 85 | 126 |
| 70. | 86 | 126 |
| 71. | 87 | 70 |
| 72. | 87 | 123 |
| 73. | 87 | 127 |
| 74. | 88 | 69 |
| 75. | 91 | 87 |
| 76. | 91 | 90 |
| 77. | 91 | 92 |
| 78. | 91 | 107 |
| 79. | 93 | 1 |
| 80. | 93 | 91 |
| 81. | 94 | 88 |
| 82. | 96 | 2 |
| 83. | 97 | 60 |
| 84. | 97 | 118 |
| 85. | 97 | 119 |
| 86. | 98 | 118 |
| 87. | 98 | 119 |
| 88. | 98 | 126 |
| 89. | 98 | 127 |
| 90. | 102 | 10 |
| 91. | 102 | 12 |
| 92. | 104 | 20 |

| | | | |
|-------|-------------------------------------|---------------------|-------|
| ***** | FTI TUBAN II (Version 2.3) | 05/09/2000 08:50:05 | ***** |
| ***** | Oconee Nuclear Station - Unit Three | | ***** |
| ***** | S/G A | | ***** |
| ***** | 04/00 RFO | | ***** |
| ***** | | | ***** |

Page 2 of 3

ATTACHMENT A - 5 - PLUGGED TUBES

| COUNT | ROW | TUBE | COUNT | ROW | TUBE |
|-------|-----|------|-------|-----|------|
| 93. | 104 | 74 | 139. | 143 | 55 |
| 94. | 107 | 100 | 140. | 144 | 42 |
| 95. | 108 | 109 | 141. | 144 | 44 |
| 96. | 109 | 9 | 142. | 145 | 30 |
| 97. | 109 | 111 | 143. | 145 | 49 |
| 98. | 110 | 95 | 144. | 145 | 53 |
| 99. | 110 | 111 | 145. | 148 | 23 |
| 100. | 110 | 112 | 146. | 149 | 29 |
| 101. | 114 | 63 | | | |
| 102. | 116 | 5 | | | |
| 103. | 116 | 52 | | | |
| 104. | 116 | 113 | | | |
| 105. | 117 | 108 | | | |
| 106. | 119 | 3 | | | |
| 107. | 119 | 107 | | | |
| 108. | 120 | 106 | | | |
| 109. | 121 | 3 | | | |
| 110. | 121 | 100 | | | |
| 111. | 122 | 3 | | | |
| 112. | 123 | 103 | | | |
| 113. | 124 | 2 | | | |
| 114. | 125 | 1 | | | |
| 115. | 125 | 18 | | | |
| 116. | 126 | 1 | | | |
| 117. | 126 | 18 | | | |
| 118. | 127 | 98 | | | |
| 119. | 130 | 93 | | | |
| 120. | 131 | 4 | | | |
| 121. | 132 | 11 | | | |
| 122. | 132 | 60 | | | |
| 123. | 132 | 84 | | | |
| 124. | 132 | 85 | | | |
| 125. | 133 | 10 | | | |
| 126. | 134 | 10 | | | |
| 127. | 134 | 28 | | | |
| 128. | 136 | 34 | | | |
| 129. | 136 | 78 | | | |
| 130. | 137 | 75 | | | |
| 131. | 137 | 76 | | | |
| 132. | 139 | 51 | | | |
| 133. | 139 | 62 | | | |
| 134. | 139 | 69 | | | |
| 135. | 139 | 72 | | | |
| 136. | 139 | 74 | | | |
| 137. | 142 | 27 | | | |
| 138. | 142 | 58 | | | |

| | | | |
|-------|-------------------------------------|---------------------|-------|
| ***** | FTI TUBAN II (Version 2.3) | 05/09/2000 08:50:05 | ***** |
| ***** | Oconee Nuclear Station - Unit Three | | ***** |
| ***** | S/G A | | ***** |
| ***** | 04/00 RFO | | ***** |
| ***** | | | ***** |

| | |
|----------------------------------|----------------|
| ATTACHMENT A - 5 - PLUGGED TUBES | |
| COUNT ROW TUBE | COUNT ROW TUBE |

Total Data Items Found = 146
Total Tubes Found = 146

FTI TUBAN II (Version 2.3)

05/09/2000 08:50:53

Oconee Nuclear Station - Unit Three

S/G B

04/00 RFO

Page 1 of 2

ATTACHMENT A - 6 - PLUGGED TUBES

COUNT ROW TUBE

| | | |
|-----|----|-----|
| 1. | 3 | 1 |
| 2. | 3 | 2 |
| 3. | 8 | 57 |
| 4. | 9 | 58 |
| 5. | 11 | 60 |
| 6. | 13 | 67 |
| 7. | 14 | 67 |
| 8. | 15 | 5 |
| 9. | 18 | 7 |
| 10. | 18 | 76 |
| 11. | 20 | 7 |
| 12. | 21 | 83 |
| 13. | 24 | 3 |
| 14. | 27 | 84 |
| 15. | 28 | 96 |
| 16. | 34 | 1 |
| 17. | 34 | 2 |
| 18. | 35 | 56 |
| 19. | 36 | 20 |
| 20. | 38 | 7 |
| 21. | 38 | 62 |
| 22. | 39 | 51 |
| 23. | 43 | 3 |
| 24. | 43 | 4 |
| 25. | 46 | 31 |
| 26. | 47 | 62 |
| 27. | 49 | 5 |
| 28. | 52 | 63 |
| 29. | 53 | 4 |
| 30. | 54 | 2 |
| 31. | 54 | 3 |
| 32. | 54 | 126 |
| 33. | 55 | 124 |
| 34. | 57 | 43 |
| 35. | 57 | 98 |
| 36. | 57 | 103 |
| 37. | 58 | 18 |
| 38. | 58 | 50 |
| 39. | 59 | 3 |
| 40. | 60 | 128 |
| 41. | 63 | 125 |
| 42. | 64 | 110 |
| 43. | 64 | 125 |
| 44. | 67 | 35 |
| 45. | 69 | 132 |
| 46. | 72 | 84 |

COUNT ROW TUBE

| | | |
|-----|-----|-----|
| 47. | 72 | 123 |
| 48. | 75 | 7 |
| 49. | 76 | 118 |
| 50. | 77 | 59 |
| 51. | 77 | 71 |
| 52. | 78 | 41 |
| 53. | 78 | 100 |
| 54. | 79 | 27 |
| 55. | 80 | 131 |
| 56. | 81 | 105 |
| 57. | 85 | 54 |
| 58. | 85 | 116 |
| 59. | 86 | 124 |
| 60. | 88 | 125 |
| 61. | 88 | 129 |
| 62. | 95 | 1 |
| 63. | 96 | 77 |
| 64. | 97 | 114 |
| 65. | 99 | 11 |
| 66. | 102 | 80 |
| 67. | 112 | 78 |
| 68. | 114 | 52 |
| 69. | 114 | 115 |
| 70. | 115 | 4 |
| 71. | 115 | 47 |
| 72. | 119 | 70 |
| 73. | 119 | 92 |
| 74. | 120 | 72 |
| 75. | 125 | 99 |
| 76. | 126 | 40 |
| 77. | 126 | 77 |
| 78. | 133 | 6 |
| 79. | 133 | 35 |
| 80. | 135 | 3 |
| 81. | 135 | 6 |
| 82. | 136 | 80 |
| 83. | 137 | 42 |
| 84. | 138 | 68 |
| 85. | 139 | 1 |
| 86. | 139 | 68 |
| 87. | 143 | 49 |
| 88. | 145 | 50 |
| 89. | 148 | 34 |
| 90. | 150 | 18 |
| 91. | 150 | 19 |
| 92. | 151 | 12 |

FTI TUBAN II (Version 2.3) 05/09/2000 08:50:53
Oconee Nuclear Station - Unit Three
S/G B
04/00 RFO

Page 2 of 2

ATTACHMENT A - 6 - PLUGGED TUBES
COUNT ROW TUBE

COUNT ROW TUBE

Total Data Items Found = 92
Total Tubes Found = 92

Enclosure B

Inspection Assessment

The following summarizes the Once Through Steam Generator (OTSG) eddy current inspection scope during the Oconee Unit 3 EOC-18 refueling outage:

| | |
|--|--|
| Bobbin Coil (0.510 dia. MF) | 100% A-OTSG 100% B-OTSG |
| Lane and Wedge MRPC (0.460 dia. Plus Point) | Two Rows Around Sleeved Tubes A and B OTSG |
| MRPC Upper Tubesheet Roll (0.460 dia. Plus Point) | 100% A-OTSG 100% B-OTSG |
| MRPC Re-rolls Upper Tubesheet (0.460 dia. Plus Point) | 100% A-OTSG 100% B-OTSG |
| MRPC Lower Tubesheet Roll (0.460 dia. Plus Point) | 100% Original Re-expansion |
| Bobbin Sleeve Exam (0.410 dia.) | 100% Sleeves A-OTSG 100% Sleeves B-OTSG |
| Sleeve Upper and Lower Rolls (0.400 dia Plus Point) | 100% Sleeve Rolls A-OTSG 100% Sleeve Rolls B-OTSG |
| Kidney Region (Sludge Pile) (0.460 dia. Plus Point) | 100% A-OTSG 100% B-OTSG The inspection covers at least 12 inches into the tubesheet |

RPC Special Interest (0.460 dia. Plus Point)

- 1) 100% Bobbin indications regardless of location
- 2) 100% Dings above the LTS + 1.00 Inches
- 3) At least 20% sample of remaining Dings
Actual: 73% in A OTSG and 90% in B OTSG

The operating cycle length was 1.29 Effective Full Power Years (EFPY) and the primary to secondary leakrate was less than 0.5 gpd at shutdown.

Disposition of the above inspection data identified a total of 238 tubes (146 in the A-OTSG and 92 in the B-OTSG) that required removal from service. Active damage mechanisms identified during this inspection include Intergranular Attack/Stress Corrosion Cracking (IGA/SCC), IGA, impingement, wear, and upper tubesheet roll Pressurized Water SCC (PWSCC). All tubes were removed from service by installing alloy-690 rolled plugs.

Enclosure B

In-situ testing was performed to confirm structural and leakage integrity at the end of the current operating cycle. The basis for tube selection for in-situ testing was composed of throughwall structural limits calculations using the Tubeworks code (consistent with EPRI Structural Integrity Handbook), Plus Point length measurements, Plus Point and bobbin signal voltage, terrain plots, eddy current signal phase angle, past tube pull results, and past experience with in-situ testing at the other Oconee units. As a result, eleven tubes were in-situ pressure tested to 4300 psi. As required due to circumferential extent, one tube was scheduled for testing with an axial load of 2871 pounds force. However, this tube could not be tested with an axial load due to a dent at the flaw location. The indication had a 0.49 inch circumferential extent and was estimated at less than 30% through wall. Analysis indicates the flaw would not have failed at accident conditions with an axial load. The tube was tested to 4300 psi. No leakage or burst was observed during the testing. Hence structural and leakage integrity was demonstrated.

The observed degradation was analyzed consistent with NEI 97-06 and EPRI guidelines to justify full cycle operation. All inputs were considered at 95th percentile bounding values. The projected deterministic worst case end-of-cycle structural and leakage integrity margins satisfy the NEI 97-06 criteria: Therefore, full cycle operation is warranted.

IGA/SCC

The limiting degradation of concern is axial IGA/SCC in the freespan. A total of 98 tubes were removed from service due to axially oriented freespan IGA/SCC. Based on previous tube pull examination, these indications are associated with grooves on the OD surface of the tubes. These indications are removed from service on detection.

All of these tubes provided adequate margin against rupture. This determination is based on previous tube pull data, structural calculations, and in-situ pressure tests.

Extensive growth rate studies have been performed after the last two inspections at Oconee with similar results. The analysis of the Oconee Unit 3 EOC 18 data is bounded by the last Oconee Unit 1 data. The Oconee Unit 1 EOC-18 analysis indicate a best estimate upper 95th percentile growth rate of 15.6% through-wall (TW) per EFPY. Assuming a flaw is 40% TW at the beginning of cycle (BOC), a growth rate of 15.6% TW per EFPY for the next cycle, and at the 95th percentile flaw length of 1.66 inches, full cycle operation is justified. The predicted burst pressure of the assumed flaw at the end of the next cycle is above three times normal operating differential pressure considering uncertainties in the material properties and the burst pressure relationship.

Wear

Two tubes were removed from service due to wear. Tubes with wear are removed from service based on sizing with a rotating coil. The plugging limit is $\geq 40\%$ TW. Using the analysis described above and including sizing uncertainties, the predicted burst pressure of the assumed flaw (61% TW, 1.5 inches long, and less than 135° circumferential extent) at

Enclosure B

the end of the next cycle is above three times normal operating differential pressure. The tubes with wear indications removed from service were below this limit considering measurement uncertainties.

IGA

A total of 34 tubes were removed from service due to IGA. These indications are volumetric in nature with limited circumferential extent. The Plus-point probe was used in the sludge pile region of the lower tubesheet to provide enhanced detection as compared to a bobbin probe. The circumferential extent of IGA is typically below 70 degrees. Tubes with IGA are removed from service based on detection by Plus Point probe.

Based on the structural limit and the limited circumferential extent of IGA, all of these tubes provided adequate margin against rupture. The conclusion is supported by tube pull data, analysis, and past in-situ pressure testing with no observed leakage. The growth rate of volumetric IGA is extremely low. Assuming an initial flaw size of 25% TW, full cycle operation is justified based on the wear analysis described above is bounding.

Tubes with IGA are removed from service on detection.

Impingement

A total of 33 tubes were removed from service due to impingement. Most were preventatively removed from service based on location and proximity to other impingement locations. These indications are volumetric in nature with limited axial and circumferential extent similar to IGA. Based on the broached opening width, the maximum possible circumferential extent is estimated to be 98 degrees. The structural limits are equivalent to IGA or wear.

These tubes provided adequate margin against rupture. This determination is based on previous tube pull data, analysis, and eddy current sizing abilities. Typically the maximum observed depth is 60% TW. The average growth rate of impingement is approximately 10% TW per cycle. Previous pulled tube specimens at 60% TW burst at greater than 9000 psi which is typical for impingement defects. Analysis of impingement is bounded by IGA and wear. Therefore, full cycle operation is justified.

Tubes with Impingement wear are removed from service based on bobbin sizing ($\geq 40\%$ TW). Additionally, impingement defects $\leq 40\%$ TW are preventatively removed from service based on previous data and defect location.

Sleeve Indications

One tube was removed from service due to an axial indication in the sleeve roll. The sleeves contain three rolls. Roll one is at the upper tubesheet primary face and rolls two and three are in the freespan on the opposite end of the sleeve below the 15th Tube Support

Enclosure B

Plate. The indication was small and bounded by previously discussed analysis of axial indications and IGA. Therefore, full cycle operation is justified.

Tubes with degradation in the sleeves are repaired on detection.

Dents

A total of four tubes with indications in dents were removed from service due to short axial indications. All of these tubes provided adequate margin against rupture. Three of these were axial in nature and bounded by the IGSCC analysis. One was circumferential in nature and discussed above. This conclusion is supported by analysis and previous in-situ pressure testing with no observed leakage. Therefore, full cycle operation is justified.

Tubes with indications in dents are removed from service based on detection with a Plus Point probe.

Miscellaneous

A total of 12 tubes were preventatively removed from service for miscellaneous reasons. These are typically obstructed tubes, permeability, volumetric indications near the lane and wedge region, or other ambiguous eddy current indications that may mask degradation.

Upper Roll PWSCC

A total of 54 tubes were identified with indications of PWSCC in the upper tubesheet roll area. These tubes were removed from service by installing alloy 690 rolled plugs. No tubes were re-rolled. Tubes are repaired based on Plus Point detection.

All of these indications are captured in the tubesheet. The indications will not burst due to tubesheet constraint and do not present a structural concern. Laboratory helium leak tests did not identify leakage in tubes pulled in the past from Oconee Units 1 and 3. During a previous Oconee Unit 1 outage, in-situ pressure testing was performed on twelve tubes representing the deepest degradation and no tube leakage was identified. Therefore leakage is not expected at accident conditions.