

## EMERGENCY PLAN IMPLEMENTING PROCEDURES

## REVISION CONTROL SHEET

Revision No. 19Revision Date 10/31/83

Page/Proc	Date	Rev.	Page/Proc	Date	Rev.	Page/Proc	Date	Rev.
INDEX	10-31-83	11						
1.1	3-22-83	3						
1.2	10-12-83	5						
1.3	1-13-83	0						
2.1	8-8-83	3						
2.2	7-14-83	5						
2.3	DELETED							
2.4	6-20-83	0						
2.5	7-1-83	0						
2.6	7-25-83	0						
2.7	7-25-83	0						
3.1	8-1-83	3						
3.2	8-1-83	4						
3.3a	6-6-83	4						
3.3b	8-2-83	4						
4.1	DELETED							
4.2	7-14-83	1						
4.3	5-27-83	2						
4.4	DELETED							
4.5	3-15-83	1						
5.1	11-24-81	1						
5.2	11-24-81	1						
6.1	1-31-83	1						
6.2	5-11-81	0						
6.3	8-3-83	3						
6.4	3-19-83	3						
7.1	8-16-83	1						

B407240118 831102  
PDR ADOCK 05000331  
F PDR

X005

# EMERGENCY PLAN IMPLEMENTING PROCEDURES

## INDEX

<u>Document No.</u>	<u>Title</u>
1.1	Determination of the Emergency Action Level
1.2	Notification
1.3	Plant and Site Evacuation
2.1	Activation and Operation of the Operational Support Center
2.2	Activation and Operation of the Technical Support Center
2.3	DELETED
2.4	Activation and Operation of the ORAA
2.5	Control Room Emergency Response Operation
2.6	Activation and Operation of the DAEC Off-Site Radiological and Analytical Laboratory (ORAL)
2.7	Activation and Operation of the DAEC Off-Site Decontamination Facility (ODEF)
3.1	Onsite Radiological Monitoring
3.2	Offsite Radiological Monitoring
3.3a	Manual Dose Projections
3.3b	Computerized Dose Projections
4.1	DELETED
4.2	First Aid, Decontamination and Medical Support
4.3	Rescue and Emergency Repair Work
4.4	DELETED
4.5	Administration of Potassium Iodide (KI)
5.1	Deactivation of the Emergency Response Organization
5.2	Recovery and Re-entry
6.1	Maintenance of DAEC Emergency Preparedness
6.2	Training and Drills
6.3	Maintenance of Emergency Facilities Equipment and Supplies
6.4	Emergency Preparedness Communications Testing
7.1	Emergency Coordinator Duties

## NOTIFICATION

## 1.0 PURPOSE

- 1.1 This procedure provides instructions for notifying the Emergency Response Organization and Offsite Agencies of the declaration of an Emergency Action Level (EAL).
- 1.2 Additionally, this procedure also provides guidance associated with NRC notification of significant events as prescribed by
  - 1.2.1 Inspection and Enforcement Information Notice 80-06.
  - 1.2.2 Inspection and Enforcement Information Notice 80-06, Supplement 1.
  - 1.2.3 Inspection and Enforcement Bulletin 80-15
  - 1.2.4 10 CFR 50.72.
  - 1.2.5 10 CFR 20.403.

## 2.0 APPLICABILITY

- 2.1 This procedure applies to members of the on duty Operations and Security Shifts and to the Emergency Response Organization upon declaration of an EAL.
- 2.2 The procedure is also applicable to DAEC supervisory personnel in those cases where events occur at the DAEC which do not require implementation of emergency planning requirements, but for which NRC notification is required.

## 3.0 RESPONSIBILITIES

### 3.1 Operations Shift Supervisor

- 3.1.1 Initiate the notification process appropriate for the event.
- 3.1.2 Insure that notifications made to Off-Site Agencies are conducted within 15 minutes of declaring an Emergency Action Level (EAL).
- 3.1.3 Verify that the NRC is contacted within one hour of declaration of an event.

### 3.2 Security Shift Supervisor

- 3.2.1 Assign communicators as required to conduct notifications.
- 3.2.2 Advise the Security and Support Supervisor upon completion of all required notifications and appraise him of problems encountered.

### 3.3 Emergency Coordinator

- 3.3.1 Ensure that initial notifications are made to Off-Site Agencies.

EMERGENCY PLAN IMPLEMENTING PROCEDURE	EPIP 1.2
NOTIFICATION	Page 2 of 19
	Revision 5
	Date 10/12/83

3.3.2 For all events classified as an ALERT or higher, verify that continuous communications have been established with the NRC.

3.3.3 For events classified as an ALERT or greater, ensure that follow-up communications are made to the Linn and Benton County Civil Defense Offices and the State Office of Disaster Services until relieved of this function by the EOF.

#### 3.4 Assistant Plant Superintendent - Radiation Protection and Security

3.4.1 Ensure that the Duty Emergency Response Assignments Special Order is updated and published as required.

#### 3.5 Emergency Planning Assistant

3.5.1 Ensure that the listings in the Emergency Telephone Book are reviewed and updated as necessary on a quarterly basis.

3.5.2 Verify that the auto dialer system is updated as required to reflect the most current telephone numbers contained in the Emergency Telephone Book.

### 4.0 INSTRUCTIONS

#### 4.1 GENERAL REQUIREMENTS

4.1.1 All telephone numbers required for notification purposes may be found in the Emergency Telephone Book.

4.1.2 Notification of DAEC, Corporate, and Off-Site Agency personnel, including the NRC, shall be accomplished for all events classified as an emergency.

a) Off-Site Agencies shall be contacted within 15 minutes, as required by 10CFR50, Appendix E, of declaration of an emergency condition or of upgrading an emergency classification.

b) NRC contact shall be made within one (1) hour, as required by 10CFR50.72 of declaration of an emergency condition.

4.1.3 DAEC and Corporate management personnel and NRC shall also be contacted for any of the events listed on Attachment 1, prescribed in 10CFR50.72.



## NOTIFICATION

NOTE

Some of the events listed on Attachment 1 may require implementation of emergency planning requirements.

- a) NRC contact shall be made within (1) hour, as required by 10CFR50.72, of the determination that such an event has occurred.
  - b) For those events which require reporting in accordance with 10CFR20.403, a verbal and written report shall also be provided within one (1) hour or 24 hours, as applicable, to NRC Region III.
- 4.1.4 For events which require implementation of emergency planning requirements, the notification process will generally be initiated by the Operations Shift Supervisor.
- 4.1.5 For events which require reporting as defined on Attachment 1 but which do not require implementation of emergency planning requirements, the notification process shall be initiated as directed by the Plant Superintendent-Nuclear or his designee.
- 4.1.6 DAEC and Corporate management personnel to be contacted include:
- a) Plant Superintendent-Nuclear or his designee
  - b) Director of Nuclear Generation or his designee.

NOTE:

- 1) During normal working hours, the standard organizational reporting relationship should be followed in making contacts.
  - 2) During off-hours, the Operations Shift Supervisor may elect to contact only the on-call Emergency Coordinator. Further internal contacts may then be made as agreed to.
- 4.1.7 Off-Site Agencies and local response organizations to be contacted for events which require implementation of emergency planning requirements include:
- a) Linn and Benton County EOC's - via the respective Sheriff's Offices
  - b) State Office of Disaster Services
  - c) Palo Fire Department - as necessary
  - d) Palo Ambulance Service - as necessary

EMERGENCY PLAN IMPLEMENTING PROCEDURE	EPIP 1.2
NOTIFICATION	Page 4 of 19
	Revision 5
	Date 10/12/83

4.1.8 Notification of the Linn and Benton County EOC's of the emergency classification and any subsequent reclassification will be provided via the respective County Sheriff's Offices.

- a) The respective Sheriff's Offices will notify local civil defense and advise of event classification and re-classification.
- b) When the Linn and Benton County EOCs are staffed, generally not until the SITE EMERGENCY classification is reached, civil defense officials will contact the EOF.
- c) Follow-up notifications shall be provided from the DAEC to the local EOCs via the respective Sheriff's Offices for all events classified as an ALERT or greater unless relieved of this function by the EOF.
- d) If contact by telephone can not be made, backup communications capabilities to be used include the point-to-point radio and IWAS telephone, in that order.

4.1.9 If off-site assistance is required for fire or medical emergencies, notification of the need for assistance shall be made as follows:

- a) Fire Fighting Assistance - The Fire Brigade Leader shall contact the CAS Operator who shall notify Palo Volunteer Fire Department for assistance.
- b) Medical Assistance - First-aid personnel on the scene will contact the CAS Operator who shall notify Palo Ambulance Service.

NOTE:

If additional transportation assistance is required, the CAS Operator will make further contacts.

4.1.10 The NRC shall be contacted within one (1) hour of declaration of an emergency condition or determination of any of the events defined on Attachment 1.

- a) For events classified as a NOTIFICATION OF UNUSUAL EVENT, the Operations Shift Supervisor will normally make the contact.
- b) For events classified or reclassified as an ALERT or greater, the Emergency Coordinator shall insure that such notification is made and that an open continuous communications path is established, preferable via the NRC "Hot Line" (ENS).
- c) For the events identified on Attachment 1 which do not require implementation of emergency planning requirements, NRC contact shall be made as directed by the Plant Superintendent-Nuclear.

## NOTIFICATION

4.1.11 Upon completion of notifications Attachment 2, "Initial Notification Message", should be forwarded to the Operations Supervisor for his review.

a) At the conclusion of his review the Operations Supervisor, should distribute copies of Attachment 2, as follows:

1) Send the original to the Control Room, where it should be kept on file for approximately six months after which it may be discarded at his discretion.

2) Send a copy to the Technical Support Supervisor.

b) Should the Operations Supervisor review mentioned in a) result in detecting deviations from procedural guidance he should initiate appropriate corrective actions, this may include additional training, procedural revisions, etc.

#### 4.2 NOTIFICATION OF UNUSUAL EVENT

4.2.1 During normal working hours the Operations Shift Supervisor shall initiate notification of DAEC and Corporate management by contacting the Operations Supervisor or his designee.

a) Further notification of DAEC and Corporate management will be conducted following the standard organizational reporting relationship.

b) Contact of Off-Site Agencies including the NRC, shall be conducted as directed by the Operations Supervisor.

NOTE:

Notification to Off-Site Agencies shall be made within 15 minutes of declaring an EAL.

c) Communications with Off-Site Agencies shall be documented using Attachment 2, "Initial Notification Message".

NOTE:

Unless directed otherwise by the Plant Superintendent-Nuclear, no follow-up calls need be made to Off-Site Agencies. Therefore, as part of the message provided, actions being taken to correct the condition may be discussed and the agency so notified that no further calls are planned.

d) Contact with the NRC shall be documented in the Shift Supervisor's Log.

EMERGENCY PLAN IMPLEMENTING PROCEDURE	EPIP 1.2
	Page 6 of 19
NOTIFICATION	Revision 5
	Date 10/12/83

4.2.2 During non-normal working hours, the Operations Shift Supervisor shall initiate notification of DAEC and Corporate management by contacting the on-call Emergency Coordinator.

- a) Further notification of DAEC and Corporate management will be conducted as agreed to by the Operations Shift Supervisor and on-call Emergency Coordinator.
- b) Contact of Off-Site Agencies shall be conducted by the second SRO on shift and documented using Attachment 2.
- c) If the second SRO is not available, the Security Shift Supervisor may be requested to make such calls.
- d) Contact shall be made with the NRC as directed by the Operations Shift Supervisor. Such notification will normally be made by a licensed SRO. Documentation of such notification shall be recorded in the Shift Supervisor's Log.

#### 4.3 ALERT, SITE EMERGENCY OR GENERAL EMERGENCY

##### NOTE:

Full activation of the DAEC Emergency Response Organization is required for all events classified as an ALERT or greater.

- 4.3.1 The Operations Shift Supervisor shall direct implementation of EPIP 1.3, "Plant and Site Evacuation".
- 4.3.2 During normal working hours, the Emergency Coordinator shall assume all responsibility for contact of Corporate Management and Off-Site Agency personnel.

##### NOTE:

Use of the common pager number to notify the Emergency Response Organization need not be done under these circumstances.

- a) Such notifications shall normally be made from the Technical Support Center.
- b) Notification to Off-Site Agencies shall be made within 15 minutes of declaring an EAL as required by 10CFR50, Appendix E.
- c) Notifications made to Off-Site Agencies shall be documented using Attachment 2.
- d) NRC contact and establishment of a continuous open communication path with NRC Headquarters as required by 10CFR50.72 shall normally be made from the TSC as prescribed in paragraph 4.3 .



## NOTIFICATION

- 4.3.3 During non-normal working hours, notification of Corporate Management, DAEC Emergency Response Organization personnel and Off-Site Agencies shall be initiated as follows:

NOTE:

If an EAL is declared due to a security related emergency, all notification functions performed by Security Force personnel shall be assumed by Operations.

- a) Upon hearing the evacuation alarm and paging announcement the Security Shift Supervisor shall dispatch a member of the Security Force to the Control Room.
- b) The Operations Shift Supervisor shall ensure that items 2 through 7 of the Initial Notification Message, Attachment 2, is completed and verify that notification of the Off-Site Agencies is initiated. Normally such notification will be accomplished by the second SRO on shift as described in paragraph 4.5 of this procedure.
- c) The Operations Shift Supervisor shall insure that the Emergency Response Organization Notification Message, Attachment 3, is completed and provided to the Security Force member dispatched to the Control Room.
- d) The Operations Shift Supervisor shall direct notification of key members of the Emergency Response Organization using the group pager telephone number and pre-planned message as prescribed in the current Duty Emergency Response Assignments Special Order.

NOTE:

The group pager message should be repeated twice more at 5 minute intervals each.

- e) The Operations Shift Supervisor shall also notify or insure that the on call Emergency Coordinator is notified of the event by making direct telephone contact.
- f) The on call Emergency Coordinator shall notify the Emergency Response and Recovery Director by making direct telephone contact and appraise him of the situation, the sequence of events, as appropriate, and corrective actions being taken.

NOTE:

This initial contact should be brief and, if at all practicable, made before traveling to the site.

EMERGENCY PLAN IMPLEMENTING PROCEDURE	EPIP 1.2
	Page 8 of 19
NOTIFICATION	Revision 5
	Date 10/12/83

- g) Off-Site Agency contact shall be accomplished as described in paragraph 4.5.
- h) NRC contact and establishment of an open continuous communications path will normally be accomplished by the assigned communicator in the TSC as described in paragraph 4.8.

NOTE:

Regardless of the situation the Emergency Coordinator - the Operations Shift Supervisor until relieved- shall insure the NRC is contacted within 1 hour of declaration of the event.

4.4 Significant Events Requiring Prompt Notification

4.4.1 Additional events which may not be considered as those which require notification and/or activation of the Emergency Response Organization but which require prompt reporting to the NRC are tabulated in Attachment 1, "Additional Events Requiring Prompt NRC Notification".

- a) Events which require not only prompt notification of the NRC but also establishment of an open, continuous communications path are so noted.
- b) In those cases where an open, continuous communications path is required to be maintained, activation of the Emergency Response Organization will most likely be required.

4.4.2 Notification of DAEC and Corporate management personnel shall be conducted as follows:

- a) During normal working hours - see paragraph 4.2.1.
- b) During non-normal working hours - see paragraph 4.2.2.

NOTE:

If activation of the Emergency Response Organization is required, notification shall be conducted as prescribed in paragraph 4.3, including notification of Off-Site Agencies and the NRC.

4.4.3 Contact with the NRC shall be made as directed by the Plant Superintendent-Nuclear.

4.4.4 In the event that the ENS System is determined to be inoperable, the NRC Operations Center in Bethesda, Md. shall be notified within one (1) hour of such determination.

## NOTIFICATION

- 4.4.5 Events defined in 10CFR20.403 being verbally reported to both NRC Headquarters and Region III shall also be reported by telegraph, mailgram, or facsimile to NRC Region III. Written reports shall be prepared so that names of individuals who have received exposure to radiation are stated in a separate part of the report.

#### 4.5 Notification of Off-Site Agencies

- 4.5.1 Unless directed otherwise by the Operations Shift Supervisor, the second SRO on shift will provide initial notification of the event to Off-Site Agencies.

NOTE:

Notifications to Off-Site Agencies shall be made within 15 minutes of declaring an EAL.

- 4.5.2 If the second SRO is not available, the Operations Shift Supervisor may direct the Security Shift Supervisor to make such calls. In such cases:

- a) The Operations Shift Supervisor will provide the Security Force member, present at the Control Room, with the Initial Notification Message form.
- b) The Security Force member will provide the message form to the Security Shift Supervisor who will assign a Security Force member as communicator.

- 4.5.3 Upon contacting each agency, the Initial Notification Message shall be read to the individual who received the call, confirmed to be understood by the recipient, and the message form annotated to reflect:

- a) Time and date of the contact.
- b) Name of the individual who received the call.

NOTE:

- 1) Confirmation that the recipient has correctly recorded the information can be obtained by requesting that the message be read back.
  - 2) Call back verification of these initial notifications can be expected from the Off-Site Agencies contacted.
- 4.5.4 Upon completion of all calls, the on call Emergency Coordinator shall be advised upon his arrival on site.

EMERGENCY PLAN IMPLEMENTING PROCEDURE	EPIP 1.2
	Page 10 of 19
NOTIFICATION	Revision 5
	Date 10/12/83

#### 4.6 Notification of the DAEC Emergency Response Organization

- 4.6.1 The Security Force member returning from the Control Room shall provide the Emergency Response Organization Notification Message form to the Security Shift Supervisor.
- 4.6.2 The Security Shift Supervisor shall assign two communicators to contact members of the DAEC Emergency Response Organization and provide each with a copy of the Emergency Response Organization Notification Message.
- Notification Lists Nos. 1 and 2 contained in the Emergency Telephone Book shall be provided to the communicators.
  - Notification of the Emergency Response Organization by the assigned communicators shall proceed in parallel to enable rapid response by personnel who may be needed at the site.
- 4.6.3 The Security Force Communicators shall perform the following:
- Telephone, in sequence, the individuals for each emergency position and repeat the Emergency Response Organization Notification Message (Attachment 2).
  - Use the priority established in the respective Notification Lists until all positions have been filled.

#### NOTE:

Reference shall be made to the current Duty Emergency Response Assignments Special Order. Those individuals assigned should be called first.

- Allow approximately 10 rings (about 1 minute) for a call to be answered.
- Log all calls and attempts on the Notification Log form (Attachment 4).
- Proceed through the entire sequence identified on the respective Notification List.
- If the total number of people required for each emergency position has not been reached, attempt notification of these individuals unavailable during the first calling cycle.
- Advise the Security Shift Supervisor of problems encountered and positions which can not be successfully filled.



## NOTIFICATION

- 4.6.4 Upon being advised of the completion of all calls by the Security Force Communicators and of problems encountered, the Security Shift Supervisor shall report the status to the Security and Support Supervisor or, if not present, the Emergency Coordinator.
- 4.7 Upon completion of all required notifications, the Security and Support Supervisor shall advise the Emergency Coordinator of their completion and of significant problems encountered.
- 4.7.1 If the required Emergency Response Organization positions have not been filled the Emergency Coordinator shall designate temporary personnel reassignments which may be necessary to fill the positions.
- 4.7.2 If additional support personnel are required and available from the Corporate Emergency Response Organization, the Security and Support Supervisor shall coordinate such needs with the Emergency Support Manager.
- 4.8 Notification of the Nuclear Regulatory Commission (NRC) shall proceed as follows:
- 4.8.1 Notification of the NRC should occur following activation of the TSC by the communicator assigned.
- a) As directed by the Emergency Coordinator or Technical Support Center Supervisor, the communicator shall notify the NRC of the declared EAL.
- b) The time of the initial call and the recipients name shall be recorded in the TSC log.
- 4.8.2 Notification of the NRC shall be accomplished within one hour of declaration of the event, as prescribed in 10CFR50.72.
- 4.8.3 Once communications with the NRC have been established, continuous communications must be maintained as prescribed in 10CFR50.72 unless terminated by the NRC.
- 4.9 Notification of Event Re-classification
- 4.9.1 The Emergency Coordinator shall ensure that offsite authorities are notified of event reclassification.
- 4.9.2 If the event is reclassified to a more severe condition, such notification should be made within 15 minutes.

NOTE:

If the EOF has been activated, this responsibility shall be assumed by the Emergency Response and Recovery Director.

EMERGENCY PLAN IMPLEMENTING PROCEDURE	EPIP 1.2
NOTIFICATION	Page 12 of 19
	Revision 5
	Date 10/12/83

- a. When the event is classified as more severe, contact shall be made with each organization or individual required by the new EAL.
- b. When the event is classified as less severe, contact shall be made with each organization or individual required by the former EAL.

4.9.3 Upon deactivation of Emergency Response Organization from events classified as an ALERT, SITE EMERGENCY or GENERAL EMERGENCY, contact shall be made with each organization or individual providing or coordinating support functions with the Emergency Response Organization.

4.9.4 Documentation of such notifications shall be made in the TSC Log.

## 5.0 REFERENCES

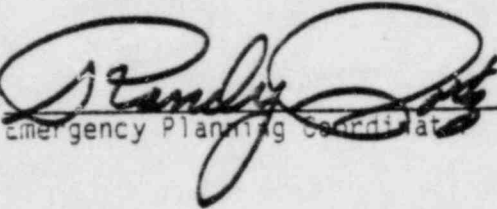
- 5.1 Iowa Electric Light and Power Company Emergency Response Plan.
- 5.2 Duane Arnold Energy Center Emergency Plan
- 5.3 10CFR50.72
- 5.4 10CFR50, Appendix E.
- 5.5 10CFR20.403
- 5.6 NUREG 0654, Rev. 1.

## 6.0 ATTACHMENTS

1. Additional Events Requiring Prompt NRC Notification
2. Initial Notification Message Content
3. Emergency Response Organization Notification Message Content
4. Notification Log

## NOTIFICATION

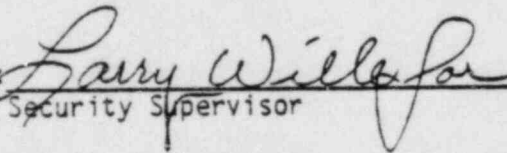
Approved by:

DATE: 10/13/83

Approved by:

CR Mink  
Operations SupervisorDATE: 10/14/83

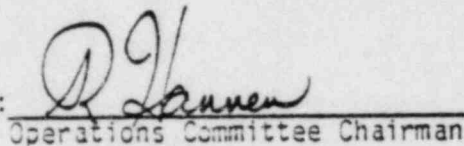
Approved by:

DATE: 10/14/83

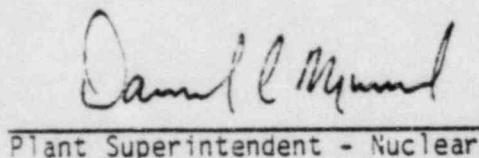
Reviewed by:

Herb Lisinga  
ALARA CoordinatorDATE: 10/14/83

Reviewed by:

  
Operations Committee ChairmanDATE: 10-18-83

Approved by:

  
Plant Superintendent - NuclearDATE: 10-20-83

EMERGENCY PLAN IMPLEMENTING PROCEDURE	EPIP 1.2
	Page 14 of 19
NOTIFICATION	Revision 5
	Date 10/12/83

# ATTACHMENT 1

## ADDITIONAL EVENTS REQUIRING PROMPT NRC NOTIFICATION

1. The exceeding of any Technical Specification safety limit.  
The DAEC Safety Limits are as identified in Tech. Spec. Sections 1.1.A thru 1.1.D, 1.2.1, and 1.2.2 and are intended to establish limits below which the reasonable maintenance of the cladding and primary systems is assured. Open, continuous path required to NRC in Bethesda
2. Any event that results in the nuclear power plant not being in a controlled or expected condition while operating or shutdown. Open, continuous path required to NRC in Bethesda
3. Any act that threatens the safety of the nuclear power plant or site personnel or the security of special nuclear material, including instances of sabotage or attempted sabotage. Open, continuous path required to NRC in Bethesda
4. Any event requiring initiation of shutdown of the nuclear power plant in accordance with Technical Specification Limiting Conditions for Operation. Notification only within one (1) hour to NRC in Bethesda
5. Personnel error or procedural inadequacy which during normal operations, anticipated operational occurrences, or accident conditions, prevents or could prevent, by itself, the fulfillment of the safety function of those structures, systems, and components important to safety that are needed to (i) shutdown the reactor safely and maintain it in a safe shutdown condition or (ii) remove residual heat following reactor shutdown or (iii) limit the release of radioactive material to acceptable levels or reduce the potential for such release. Notification only within one (1) hour to NRC in Bethesda
6. Any event resulting in manual or automatic actuation of Engineered Safety Features, including the Reactor Protection System. Actuation of Engineered Safety Features including the Reactor Protection System which result from and are part of the planned sequence during surveillance testing does not constitute an event reportable under this item. Notification only within one (1) hour to NRC in Bethesda
7. Any accidental, unplanned, or uncontrolled radioactive release. (Normal or expected releases from maintenance or other operational activities are not included). Notification only within one (1) hour to NRC in Bethesda



## NOTIFICATION

ATTACHMENT 1(continued)ADDITIONAL EVENTS REQUIRING PROMPT NRC NOTIFICATION

8. Any fatality or serious injury occurring on the site and requiring transport to an offsite medical facility for treatment. Serious injury is considered to be any injury that in the judgement of the licensee representative will require admission of the injured individual to a hospital for treatment or observation for an extended period of time (greater than 48 hours). Injuries that only require treatment and/or medical observation at a hospital or offsite medical facility, but do not meet the conditions specified above, are not reportable under this item. Notification only within one (1) hour to NRC in Bethesda
9. Any serious personnel radioactive contamination requiring extensive onsite decontamination or outside assistance. Notification only within one (1) hour to NRC in Bethesda
10. Strikes of operating employees or security guards, or honoring of picket lines by these employees. Notification only within one (1) hour to NRC in Bethesda
11. In the event that deviation from Technical Specifications requirements becomes necessary, reasonable action that departs from a license condition or Technical Specification in an emergency, when such action is immediately needed to protect the public health and safety, is permissible, as specified in 10CFR50.54(x). Notification only within one (1) hour to NRC Region III.
12. Any event meeting the criteria of 10CFR20.403 for notification, as follows:

NOTE:

Each of the events defined below shall also be verbally reported to NRC in Bethesda within one (1) hour.

- a) Exposure of the whole body of any individual to 25 rems or more of radiation; exposure of the skin of the whole body of any individual of 150 rems or more of radiation; or exposure of the feet, ankles, hands, or forearms of any individual to 375 rems or more of radiation; or Verbal & written notification within one (1) hour to NRC Region III
- b) The release of radioactive material in concentrations which, if averaged over a period of 24 hours, would exceed 5,000 times the limits specified for such materials in Appendix B, Table II; or Verbal & written notification within one (1) hour to NRC Region III

ATTACHMENT 1(continued)ADDITIONAL EVENTS REQUIRING PROMPT NRC NOTIFICATION

- |   |  |
|---|--|
| c) A loss of one working week or more of the operation of any facilities affected; or   | Verbal & written notification within one (1) hour to NRC Region III            |
| d) Damage to property in excess of \$200,000.   | Verbal & written notification within one (1) hour to NRC Region III            |
| e) Exposure of the whole body of any individual to 5 rems or more of radiation; exposure of the skin of the whole body of any individual to 30 rems or more of radiation; or exposure of the feet, ankles, hands, or forearms to 75 rems or more of radiation; or | Verbal & written notification within twenty-four (24) hours to NRC Region III  |
| f) The release of radioactive material in concentrations which, if averaged over a period of 24 hours, would exceed 500 times the limits specified for such materials in Appendix B, Table II; or   | Verbal & written notification within twenty-four (24) hours to NRC Region III  |
| g) A loss of one day or more of the operation of any facilities affected; or  | Verbal & written notification within twenty-four (24) hours to NRC Region III  |
| h) Damage to property in excess of \$2,000.   | Verbal & written notification within twenty-four (24) hours to NRC Region III. |

## NOTIFICATION

ATTACHMENT 2INITIAL NOTIFICATION MESSAGE

Date \_\_\_\_\_

Time EAL Declared \_\_\_\_\_ Operations Shift Supervisor \_\_\_\_\_

 1) This is \_\_\_\_\_ calling from the Duane Arnold Energy Center.  
     Caller's name & title

2) An event has occurred which is classified as a:

a) Notification of Unusual Event, a Type A-\_\_\_\_\_ event.

b) Alert, a Type B-\_\_\_\_\_ event.

c) Site Emergency, a Type C-\_\_\_\_\_ event.

d) General Emergency, a Type D-\_\_\_\_\_ event.

3) Abnormal radiological releases ARE/ARE NOT occurring.

-- If occurring:

a) The wind is out of the \_\_\_\_\_. The population of concern is located in area(s) \_\_\_\_\_.

4) Protective measures for the public ARE/ARE NOT recommended.

-- If protective measures are required as a result of performing dose projections in accordance with EPIP 3.3, provide protection action recommendations.

5) Off-site radiological monitoring IS/IS NOT planned.

-- If planned:

a) Emergency Monitoring Teams are being/have been dispatched

6) Direct assistance at DAEC by your agency IS/IS NOT requested.

-- If assistance is desired, explain:

 \*\*\*\*\*  
NOTE:

 \* Notifications to Off-Site Agencies must be made within 15 minutes of  
 \* declaration of an Emergency Action Level (EAL).  
 \*\*\*\*\*

 Received by: Linn County \_\_\_\_\_ Time \_\_\_\_\_  
               Benton County \_\_\_\_\_ Time \_\_\_\_\_  
               Office of Disaster \_\_\_\_\_ Time \_\_\_\_\_  
               Services \_\_\_\_\_

Initial Notifications Conducted by \_\_\_\_\_

Forward this attachment to Operations Supervisor.





EPIP 1.2  
 Page 19 of 19  
 Revision 5  
 Date 10/12/83

Communicator \_\_\_\_\_



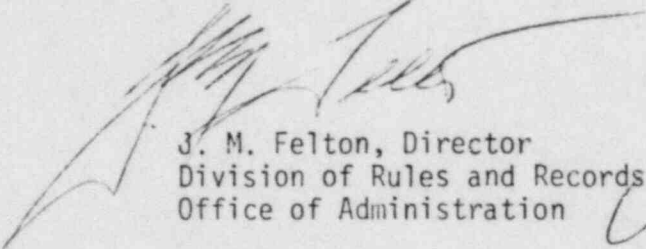
UNITED STATES  
NUCLEAR REGULATORY COMMISSION  
WASHINGTON, D. C. 20555

July 17, 1984


50-331 Duane Arnold

MEMORANDUM FOR: Chief, Document Management Branch, TIDC  
FROM: Director, Division of Rules and Records, ADM  
SUBJECT: REVIEW OF UTILITY EMERGENCY PLAN DOCUMENTATION

The Division of Rules and Records has reviewed the attached document and has determined that it may now be made publicly available.



J. M. Felton, Director  
Division of Rules and Records  
Office of Administration



Attachment: As stated