



June 17, 2015

United States Nuclear Regulatory Commission

Washington, DC, 20555-0001

Att: Mr. Hector Rodriguez-Luccioni, Ph. D.

**Subject: Response to request for additional information regarding Lumondi Inc exempt distribution license renewal application (Licensee #04-23929-01E),**

**Mail Control # 586355**

Mr. Rodriguez,

Please see below and attached, answers and supporting documents for Questions 1-5 for your letter dated June 11, 2015:

1. Please see attached Excel sheet, which identifies each watch and in a table and identifies the by- product of the dial & hands separately. Please note that a different style # simply constitutes a change in the color of the dial, which I have noted for you. You have also asked for the identification of the source model numbers from MB-Microtec. Please note that MB-Microtec uses different style numbers than we do in the identification of our watches (Models 100/1, 100/2, 100/3, 100/4, 100/5). I have attached examples of "Certificates of Quality Control/Leakage tests" that are provided to us from MB-Microtec and the factory producing our watches, which details the testing procedure, limits, etc.
2. Models 100/1, 100/2, 100/3, 100/4, 100/5 are timepieces using gaseous tritium light sources. See chart below for classification definitions:

Model 100/1 timepieces are analog watches with mechanical (automatic) or quartz movements
---

Model 100/2 timepieces are digital watches with liquid crystal display (LCD)
--

Model 100/3 timepieces are watches with analog reading and LCD display
Model 100/4 timepieces are alarm clocks equipped with mechanical or quartz movements and analog or LCD display
Model 100/5 is a pocket watch with a mechanical or quartz movement and analog or LCD display

Model 100/1 applies to 99.9% of our watches.

3. Please see attached Excel sheet
  
4. I have attached product spec sheets for each series of watches. As an example, please note that the product spec sheet for the 3050 Series covers all styles listed on our price sheet (3051, 3052, 3051.BO, 3052.BO 3053, 3057, 3059, and 3067). The only difference between these watches is the color of the dial. The location of the sources is highlighted in the “night shot” of the watch. The specifics of the case size, case material construction, crystal material, etc. are all listed; however I will lay out a general construction overview of all of our watches below:

### **Materials**

Materials for the cases and bottom plate (case back) may include one or more of the following: Brass, stainless-steel, titanium, gold, platinum, and injection molded plastic and polymers. Case backs may be snap-on, screw-on or attached by screws.

Sapphire and mineral glass crystals are secured by a press-fit stainless steel or aluminum ring.

### **Timepiece**

Unless the timepiece is destroyed or the crystal removed, there is no access to the tritium sources. Although the case bottom may be removed, the design and construction is such that access to the sources on the hands and dials is not possible without destruction of the timepiece.

Timepiece hands are designed to permit attaching a source from below by a non-hardening adhesive. Sources are attached to the dial by placing them into milled slots and securing them with a non-hardening adhesive or by a source retaining ring that, when bonded to the timepiece dial secures the sources in place.

The dial is marked with a “T” (for tritium) as recommended in the “radiation protection standards for gaseous tritium light device” section 7 – marking and labelling (Nuclear Energy Agency, OECD, 1973). The bottom of the case back is marked by etching with “3-H” for the contained tritium and with “LX” for the watch brand logo and “MB-MICROTEC” for the tritium tube manufacturer.

### **Conditions of Normal Use**



The expected useful life of the timepiece is 10 years. The timepiece will be subjected to environs allowing human occupancy.

#### **Prototype testing**

The manufacturer has subjected prototype timepieces to the requirements of ANSI 43.4 2000. The prototypes have all passed the requirement for classification T2GC1222222.

#### **External Radiation Control**

External radiation dose rates are minimal and need not be considered. Primary tritium beta rays do not penetrate the GTLS glass enclosure. Traces of very soft (as a few keV) secondary bremsstrahlung are absorbed by the timepiece case.

#### **Quality assurance and control**

The following quality control test on finished production lots of the timepieces are performed:

##### **Source testing**

All (100%) of the sources are tested for tritium leakage and must pass the soaking test per ANSI 43.4-2000 section 8.3.2. Lots of 1-20 sources are accepted when total leakage is less than 50 nCi (1,85 KBq) in 24 hours.

##### **Lot testing of finished timepieces**

All finished timepieces are subjected to a 100% visual inspection for missing, dislodged, dim or black light sources. In addition a random sample of each finished lot is subjected to the following:

- A visual inspection for the "H-3", "LX" and "MB\_MICROTEC" on the case back
- A drop test from 3.28 feet (1 m) to a steel plate, then a visual inspection for missing, dislodged, dim or black sources
- A soak test per section 8.3.2 of ANSI 43.4-2000 to a maximum of 50 nCi (1,85 KBq) in 24 hours

Any failure will trigger a 100% inspection of the lot for defect.

**Please see attached spec sheets.**

5. Please see attached examples of T25 marking on dial and etching of "3-H LX/MB-MICROTEC" on case back.

Sincerely,

A handwritten signature in black ink, appearing to read "Max W. Robertson", with a long horizontal flourish extending to the right.

Max W. Robertson

Director of U.S. Operations

Radiation Safety Officer

Lumondi Inc. **DBA** Luminox Watch Company

415-455-9500 ext 108

[Maxrluminox@aol.com](mailto:Maxrluminox@aol.com)





## 2015 WATCH PRICE LIST

EFFECTIVE 4/1/2015

MODEL	Color	Model#	Byproduct Activity by Watch	Byproduct Activity by Dial	Byproduct Activity by Hands
4241	BLK/GRAY	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
4221	BLK/GRAY	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
4221.CW	BLK/GRAY	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3001	BLK/WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3001.BO	BLK/DK GRAY	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3003	BLUE/WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3051.25TH	BLK/WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3053.25TH	BLUE/WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3055.25TH	YELLOW/WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3057.25TH	GRAY/ WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3051.25TH.SET	BLK/WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3057.25TH.SET	GRAY/ WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3051	BLK/WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3051.BO	BLK/DK GRAY	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3052	BLK/ WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3052.BO	BLK/DK GRAY	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3053	BLK/DK BLUE	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3057.WO	WHITE/SILVER	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3059	BLK/ORANGE	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3067	BLK/GREEN	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
7051	BLK/WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
7051.BO	BLK/DK GRAY	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
7057.WO	WHITE/SILVER	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
7065	BLK/PINK	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3081	BLK/WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3081.BO	BLK/DK GRAY	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3082	BLK/ WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3082.BO	BLK/DK GRAY	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3083	BLK/BLUE	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3089	BLK/ORANGE	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3151	BLK/WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3152	BLK/WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3152.BO	BLK/DK GRAY	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3181	BLK/WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3182	BLK/WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3182.BO	BLK/DK GRAY	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand





## 2015 WATCH PRICE LIST

MODEL	Color	Model#	Byproduct Activity by Watch	Byproduct Activity by Dial	Byproduct Activity by Hands
6502	BLK/SILVER	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
6502.BO	BLK/DK GRAY	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
6251.BO	BLK/DK GRAY	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
6252	BLK/WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
6252.BO	BLK/BLK	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
6265	BLK/WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
7251.BO	BLK/DK GRAY	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
7252.BO	BLK/DK GRAY	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
7257	MOP/GRAY	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
7258	MOP/GRAY	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3955.SET	YELLOW/BLK	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3059.SET	ORANGE/BLK	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
1526	BLK/YELLOW/WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
1511	BLK/WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
1512	BLK/WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
1513	BLUE/WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand

9401	BLK/IVORY	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
9461	BLK/IVORY	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
9421	BLK/IVORY	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
9441	BLK/IVORY	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
6402	BLK/WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
6402.BO	BLK/BLK	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
9272	BLK/SILVER	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
9278	BLK/SILVER	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
9382	BLK/ORANGE	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
9388	BLK/ORANGE	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand





## 2015 WATCH PRICE LIST

MODEL	Color	Model#	Byproduct Activity by Watch	Byproduct Activity by Dial	Byproduct Activity by Hands
1101	BLK/YELLOW	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
1105	YELLOW/BLK	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
1142	BLK/BLK	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
1143	WHT/BLK	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
1861.BO	BLK/DK GRAY	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
1801	BLK/IVORY	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
1801.BO	BLK/DK GRAY	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
1941	BLK CARBON/GRAY	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
1941.BO	BLK/DK GRAY	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
1942	BLK CARBON/GRAY	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
1943	BLUE/GRAY	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
1945	BLK/TAN	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
1947	IVORY/BROWN	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
1921	BLK CARBON/GRAY	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
1921.BO	BLK/DK GRAY	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
1922	BLK CARBON/GRAY	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
1923	BLUE/GRAY	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
1925	BLK/TAN	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
1927	IVORY/BROWN	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
8802	GRAY/BLK	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
8815	BLK/GRAY	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
8817.GO	BLK/OLIVE	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
8841.KM.SET	BLK/WHT/YELLOW	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
8842.MI.SET	BLK/WHT/YELLOW	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
8821.KM	BLK/WHT/ORANGE	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
8822.MI	BLK/WHT/ORANGE	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
8823.KM	BLK/GRAY/BLUE	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
8824.MI	BLK/GRAY/BLUE	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
8825.KM	BLK/OLIVE/YELLOW	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
8826.MI	BLK/OLIVE/YELLOW	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
8831.KM	BLK/WHT/GRN	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
8832.MI	BLK/WHT/GRN	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
0201.SL	BLK/WHT/GRN	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
0201.BO	BLK/BLK	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
0215.SL	BLK/RED/GRN	Model 100/1	Up to 25 mCi 90,925 GBq T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand





## 2015 WATCH PRICE LIST

MODEL	Color	Model#	Byproduct Activity by Watch	Byproduct Activity by Dial	Byproduct Activity by Hands
5241	BLK/WHITE	Model 100/3	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
5121.GN	BLK/GRAY	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
5127	BLK/GRAY	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
5021	BLK/WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
5021.GN	BLK/GRAY	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
5023	BLUE/WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
5027	BLK/WHT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand

3054.SET	DK BLUE/WT	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3055.LM	YELLOW/BLK	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3059.GG	ORANGE/BLK	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
3063.LM	KHAKI/BLK	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
8809.GG	ORANGE/BLK	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
8813.LM	KHAKI/BLK	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
8819.GG	BLK/ORANGE	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
1822	less than 15 mCi (555 MBq) T	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
1827	less than 15 mCi (555 MBq) T	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand
1828	less than 15 mCi (555 MBq) T	Model 100/1	Up to 25 mCi 90,925 GBq) T	less than 15 mCi (555 MBq) T	less than 5 mCi (185 MBq) T per hand



Leackage Test			
Company <b>L&amp;M Swiss Watch Ltd.</b>		Customer <b>Lumondi, Inc.</b>	Document <b>INV-15-0466</b>
			Document date <b>09.04.2015</b>
Pos	Leackage Test	Description	Quantity
1	LLT 08_C	8 LLT Carbon, leakage test No 13820	100
2	LLT 14_M	14 LLT Metal, leakage test No 385	612
3	LLT 15_C	15 LLT Carbon, leakage test No 357	80
4	LLT 15_M	15 LLT Metal, leakage test No 366	483
5	LLT 16_C	16 LLT Carbon, leakage test No 397	159
6	LLT 16_M	16 LLT Metal, leakage test No 362	151
Total			1'585

MONDAINE

Swiss Watch



M+WATCH

Private Label

Trade Brand Watches  
Promotional Watches  
Outsourcing Services

Office:

Etzelstrasse 27  
P.O. Box  
8808 Pfäffikon SZ  
Switzerland

P +41 (0)58 666 88 00  
F +41 (0)58 666 87 00

Factory/Service Center:

Hunnenweg 4  
P.O. Box  
4503 Solothurn  
Switzerland

P +41 (0)58 666 86 68  
F +41 (0)58 666 85 68

 Mondaine Watch Ltd

E-mail:  
info@mondaine.ch

Retail CH:  
P +41 (0)58 666 88 33  
F +41 (0)58 666 87 88

www.mondaine-group.com swissmarket@mondaine.ch

### CERTIFICATE


It is certified that the watches with 16 light sources / metal case shipped by Mondaine Watch Ltd. (Switzerland) and invoiced per enclosure were taken from the production lot covered by the

- Certificate of Quality Control Testing No.: 362 / February, 2013  
For 151 watches
- Certificate of Quality Control Testing No.: .....  
for .... watches
- Certificate of Quality Control Testing No.: .....  
for .... watches
- Certificate of Quality Control Testing No.: .....  
for .... watches

These certificates are on file at the consignee's office.

Certified: February, 2013

Mondaine Watch Ltd.

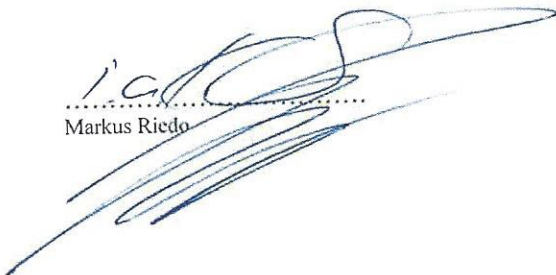  
.....  
Markus Riedo

**MONDAINE**  
Swiss Watch



**M+WATCH**

Private Label  
Trade Brand Watches  
Promotional Watches  
Outsourcing Services

Office:

Etzelstrasse 27  
P.O. Box  
8808 Pfäffikon SZ  
Switzerland

P +41 (0)58 666 88 00  
F +41 (0)58 666 87 00

E-mail:

info@mondaine.ch

Factory/Service Center:

Hunnenweg 4  
P.O. Box  
4503 Solothurn  
Switzerland

P +41 (0)58 666 86 68  
F +41 (0)58 666 85 68

Retail CH:

P +41 (0)58 666 88 33  
F +41 (0)58 666 87 88

**Mondaine Watch Ltd**

**CERTIFICATE OF QUALITY CONTROL TESTING No. 362 / FEBRUARY 2013**  
**PRODUCTION LOT NO. 34'000**

**ANALOG WRISTWATCH MODEL WITH 16 LIGHT SOURCES / METAL CASE**

**Activity:**

**25 mCi T as gaseous tritium light sources**

**US NRC Registry No.:**

**NR 446-D-103-E**

**US NRC License No.:**

**29-23921-01 (of Luminox Company, USA)**

**NYS, DOL Radiactive Material License No.:**

**2641-3921**

**1. Requirements on sources used for wristwatches with 16 light sources, metal case**

All sources used are taken from production lots exhibiting leakage of less than 50nCi T / 24 hours per batch of max. 80 sources.  
Results of 100% test per ANSI N43.4, section 8.3.2. are on file at Mondaine Watch Ltd, Zurich, Switzerland

**2. Requirements of Production Lots of Finished Watches**

2.1 100 % visual inspection in dark room for absence of dislodged, dim or black sources.

2.2 Random samples testing per MIL-Std-105D, level S4, AQL 1% for

- visual control for marking on dial and case bottom

- drop from 1 m height to a steel plate followed by visual inspection for absence of dislodged, dim, dark and broken sources

- leakage test per 8.3.2. ANSI N43.4 to a max. of 50 nCi T per 24 hours



## CERTIFICATE

Watch quality test approval (Leakage Test only)

No. 90434

Documentation data of subjects being tested in accordance to

**ANSI N43.4-2005 (ANSI N540)**

Manufacturer	Mondaine Ltd.	Brand	LUMINOX
Main-Model-Ref.	A.3165	US NRC Model No.	100 / 1
Leakage-Lot. No.	362	Lot Size	34'000 watches
Manufactured	January 2013	Watch type	wrist; analog
Activity (T2 gas)	max. 25 mCi	Model-Category no.	YN-16-YYY-Y-PR-025

**1. Requirements on sources used for the watch**

All sources used are taken from production lots exhibiting leakage of less than 50 nCi T2 / 24 hours per batch of max. 80 sources. Results of 100% test per ANSI N43.4-2005, section 8.3.2. are on file at mb-microtec Inc., Niederwangen, Switzerland.

**2. Requirements of Leakage Test**

- Leakage test per 8.3.2. ANSI N43.4-2005 to a max. of 50 nCi T per 24 hours.

**3. Results of tests**

- 3.1 Visual inspection, as per point 3.1  
Markings: passed  
Lights: passed
- 3.2 Random sample test, as per point 3.2  
Sample size: 50 pcs  
Leakage test: passed  
Leakage test results – see enclosed watch leakage test

**Production lot is accepted**

Authorized signature:

Daniel Jakob  
Quality Assurance

Niederwangen, February 15, 2013

## Certificate of Design Conformity Compliance

The undersigned, by its duly authorized officers, who are fully cognizant of the procedures used, do hereby state:

1. This shipment made on 09.04.2015 (date) from exporter L & M SWISS WATCH LTD of devices manufactured by \_\_\_\_\_ x Mb-Microtec AG \_\_\_\_\_ Horoswiss SA to Lumondi, Inc. (licensee/importer) contains 151 applicable timepieces with gaseous tritium light sources (GTLS) attached to dials, hands, and bezels. The GTLS used were manufactured by Mb-Microtec AG, registered with USNRC under SSR No: NR-446-S-102-S
2. Lumondi, Inc., the consignee of the above shipment holds USNRC Radioactive Materials License No. 29-23921-01 and USNRC Exempt Distribution Licence No. 29-23921-02E to import, store, and initially transfer the timepieces of the shipment.
3. The timepieces, hands and dials of this shipment were manufactured in accordance with one or more standards set forth by the following: International Atomic Energy Agency, International Standards Organization, OECD Nuclear Energy Agency, American National Standards Institute, or equivalent industry standard.
4. The timepieces, hands and dials of this shipment comply with the requirements of 10 CFR 32.14, 30.15, and with the information submitted with the application to the USNRC license under Item 2, in particular:
  - Only dials, hands, and bezels are used from tested and accepted production lots;
  - The activity per timepiece is limited to 25mCi (925 MBq) T per timepiece, to 5 mCi (185 MBq) T per hand, and to 15mCi (555 MBq) T per dial plus bezel (if any).
5. Certificates of GTLS testing and of quality control testing on production lots of dials, ands, and/or bezels are on file with the manufacturer and the licensed importer listed in Item 1.
6. Signatures:

On behalf of L & M SWISS WATCH LTD

Lumondi, Inc

a. Manufacturer/Exporter

b. Licencee/Importer

Authorized Agent

(Signature)

(Signature)

Authorized Agent

(Print Name)

(Print Name)

Date:

13. 4. 15

11/20/15

May 15, 2006

**MONDAINE**

Swiss Watch



**M+WATCH**

**Private Label**

Trade Brand Watches  
Promotional Watches  
Outsourcing Services

Office:

Eizelstrasse 27  
P.O. Box  
8808 Pfäffikon SZ  
Switzerland

P +41 (0)58 666 88 00  
F +41 (0)58 666 87 00

Factory/Service Center:

Hunnenweg 4  
P.O. Box  
4503 Solothurn  
Switzerland

P +41 (0)58 666 86 68  
F +41 (0)58 666 85 68

**Mondaine Watch Ltd**

E-mail:

info@mondaine.ch

Retail CH:

P +41 (0)58 666 88 33  
F +41 (0)58 666 87 88

www.mondaine-group.com swissmarket@mondaine.ch

**CERTIFICATE**


It is certified that the watches with 16 light sources / carbon case shipped by Mondaine Watch Ltd. (Switzerland) and invoiced per enclosure were taken from the production lot covered by the

- Certificate of Quality Control Testing No.: 397 / September, 2014  
For 159 watches
- Certificate of Quality Control Testing No.: .....  
for .... watches
- Certificate of Quality Control Testing No.: .....  
for .... watches
- Certificate of Quality Control Testing No.: .....  
for .... watches

These certificates are on file at the consignee's office.

Certified: October, 2014

Mondaine Watch Ltd.

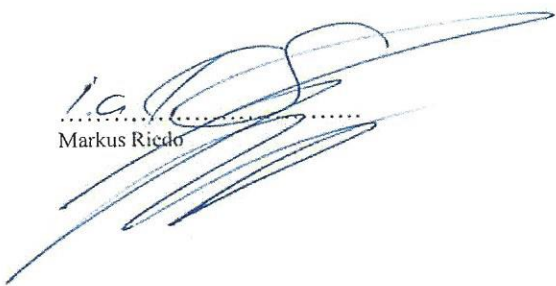  
Markus Riedo



MONDAINE

Swiss Watch



M+W WATCH

Private Label

Trade Brand Watches  
Promotional Watches  
Outsourcing Services

Office:

Etzelstrasse 27  
P.O. Box  
8808 Pfäffikon SZ  
Switzerland

P +41 (0)58 666 88 00  
F +41 (0)58 666 87 00

Factory/Service Center:

Hunnenweg 4  
P.O. Box  
4503 Solothurn  
Switzerland

P +41 (0)58 666 86 68  
F +41 (0)58 666 85 68

 **Mondaine Watch Ltd**

E-mail:

info@mondaine.ch

Retail CH:

P +41 (0)58 666 88 33  
F +41 (0)58 666 87 88

www.mondaine-group.com swissmarket@mondaine.ch

**CERTIFICATE OF QUALITY CONTROL TESTING No. 397 / September 2014**  
**PRODUCTION LOT NO. 34'000**

**ANALOG WRISTWATCH MODEL WITH 16 LIGHT SOURCES / CARBON CASE**

**Activity:**

**50 nCi T as gaseous tritium light sources**

**US NRC Registry No.:**

**NY 1271-S-101-S**

**US NRC License No.:**

**NR-446-D-102E (of Luminex Company, USA)**

**NYS, DOH Radiactive Material License No.:**

**C2641/DH09-492**

**1. Requirements on sources used for wristwatches with 16 light sources, carbon case**

All sources used are taken from production lots exhibiting leakage of less than 50nCi T2 / 24 hours per batch of max. 80 sources.  
Results of 100% test per ANSI N43.4-2005, section 8.3.2. are on file at Mondaine Watch Ltd, Zurich, Switzerland

**2. Requirements of Production Lots of Finished Watches**

2.1 100 % visual inspection in dark room for absence of dislodged, dim or black sources.

2.2 Random samples testing per MIL-Std-105D, level S4, AQL 1% for

- visual control for marking on dial and case bottom

- drop from 1 m height to a steel plate followed by visual inspection for absence of dislodged, dim, dark and broken sources

- leakage test per 8.3.2. ANSI N43.4-2005 to a max. of 50 nCi T per 24 hours

## CERTIFICATE

### Watch quality test approval (Leakage Test only)

No. 94129

Documentation data of subjects being tested in accordance to

**ANSI N43.4-2005 (ANSI N540)**

Manufacturer	Mondaine Ltd.	Brand	Luminox
Main-Model-Ref.	3050 black/white	US NRC Model No.	100 / 1
Leakage-Lot. No.	397	Lot Size	34'000 watches
Manufactured	September 2014	Watch type	wrist, analog
Activity (T2 gas)	max. 25 mCi	Model-Category no.	YN-14-NY-YYNN-GT-025

#### 1. Requirements on sources used for the watch

All sources used are taken from production lots exhibiting leakage of less than 50 nCi T2 / 24 hours per batch of max. 80 sources. Results of 100% test per ANSI N43.4-2005, section 8.3.2, are on file at mb-microtec Inc., Niederwangen, Switzerland.

#### 2. Requirements of Leakage Test

- Leakage test per 8.3.2. ANSI N43.4-2005 to a max. of 50 nCi T per 24 hours.

#### 3. Results of tests

- 3.1 Visual inspection, as per point 3.1  
Markings: passed  
Lights: passed
- 3.2 Random sample test, as per point 3.2  
Sample size: 50 pcs  
Leakage test: passed Leakage test results – see enclosed watch leakage test

**Production lot is accepted**

Authorized signature:



Marcus Amme  
Head of Radiation Protection and  
Conventional Safety  
Niederwangen, October 15, 2014

## Watch Test

**Producer:** MONDAINE  
**Category no.:** YN-16-YY-YYN-PR-025  
**Batch no.:** 397  
**Model:** A.3051  
**Certificate no.:** 94129  
**Qty of watches:** 50

### Leakage Test:

Test procedures were followed according to ANSI N540 paragraph 8.3.2

**Test time:** 24 h  
**Test medium:** water 29g  
**Date:** 06.10.2014  
**Blind:** 17  
**Efficiency:** 26.00%

**Results:** OK

Qty	Value in cpm	Diff. to blind	Value in Bq/ml	nCi/watch*24h
1	33.17	16.17	1.04	0.83
2	34.27	17.27	1.11	0.88
3	33.17	16.17	1.04	0.83
4	25.43	8.43	0.54	0.43
5	25.43	8.43	0.54	0.43
6	28.19	11.19	0.72	0.57
7	26.53	9.53	0.61	0.49
8	29.85	12.85	0.82	0.66
9	25.98	8.98	0.58	0.46
10	34.83	17.83	1.14	0.91
11	28.19	11.19	0.72	0.57
12	35.38	18.38	1.18	0.94
13	19.35	2.35	0.15	0.12
14	23.22	6.22	0.40	0.32
15	21.01	4.01	0.26	0.21
16	21.56	4.56	0.29	0.23
17	23.22	6.22	0.40	0.32
18	30.96	13.96	0.89	0.71
19	27.09	10.09	0.65	0.52
20	19.90	2.90	0.19	0.15



# mb-microtec

self activated illumination


MB-Microtec AG  
 3172 Muri (Aargau)  
 Switzerland

MB-Microtec AG  
 3172 Muri (Aargau)  
 Switzerland

Category no.: YN-16-YY-YYN-PR-025  
 Batch no.: 397

Certificate no.: 94129  
 Qty of watches: 50

21	24.32	7.32	0.47	0.37
22	22.11	5.11	0.33	0.26
23	22.11	5.11	0.33	0.26
24	29.19	12.19	0.78	0.62
25	22.11	5.11	0.33	0.26
26	22.11	5.11	0.33	0.26
27	23.22	6.22	0.40	0.32
28	24.88	7.88	0.51	0.40
29	30.40	13.40	0.86	0.69
30	19.90	2.90	0.19	0.15
31	43.67	26.67	1.71	1.37
32	560.54	543.54	34.84	27.83
33	40.35	23.35	1.50	1.20
34	32.06	15.06	0.97	0.77
35	24.88	7.88	0.51	0.40
36	29.30	12.30	0.79	0.63
37	24.88	7.88	0.51	0.40
38	48.65	31.65	2.03	1.62
39	25.43	8.43	0.54	0.43
40	27.64	10.64	0.68	0.54
41	21.01	4.01	0.26	0.21
42	28.75	11.75	0.75	0.60
43	39.25	22.25	1.43	1.14
44	24.88	7.88	0.51	0.40
45	27.09	10.09	0.65	0.52
46	22.11	5.11	0.33	0.26
47	27.64	10.64	0.68	0.54
48	32.06	15.06	0.97	0.77
49	18.79	1.79	0.11	0.09
50	17.69	0.69	0.04	0.04
<hr/>				
	38.08	21.08	1.35	

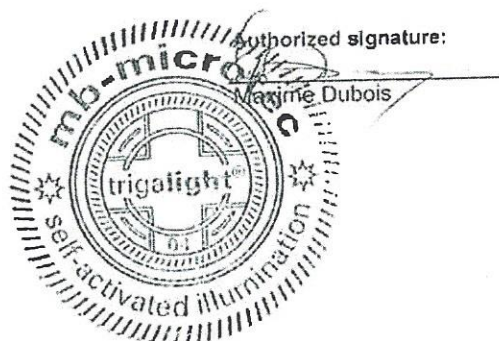

trigalight®  
 technology

traser®  
 watches

lynx®  
 systems

## Certificate of Design Conformity Compliance

The undersigned, by its duly authorized officers, who are fully cognizant of the procedures used, do hereby state:

1. This shipment made on 09.04.2015 (date) from exporter L&M SWISS WATCH LTD of devices manufactured by \_\_\_\_\_x\_\_\_\_\_ Mb-Microtec AG \_\_\_\_\_ Horoswiss SA to Lumondi, Inc. (licensee/importer) contains 159 applicable timepieces with gaseous tritium light sources (GTLS) attached to dials, hands, and bezels. The GTLS used were manufactured by Mb-Microtec AG, registered with USNRC under SSR No: NR-446-S-102-S
2. Lumondi, Inc., the consignee of the above shipment holds USNRC Radioactive Materials License No. 29-23921-01 and USNRC Exempt Distribution Licence No. 29-23921-02E to import, store, and initially transfer the timepieces of the shipment.
3. The timepieces, hands and dials of this shipment were manufactured in accordance with one or more standards set forth by the following: International Atomic Energy Agency, International Standards Organization, OECD Nuclear Energy Agency, American National Standards Institute, or equivalent industry standard.
4. The timepieces, hands and dials of this shipment comply with the requirements of 10 CFR 32.14, 30.15, and with the information submitted with the application to the USNRC license under Item 2, in particular:
  - Only dials, hands, and bezels are used from tested and accepted production lots;
  - The activity per timepiece is limited to 25mCi (925 MBq) T per timepiece, to 5 mCi (185 MBq) T per hand, and to 15mCi (555 MBq) T per dial plus bezel (if any).
5. Certificates of GTLS testing and of quality control testing on production lots of dials, and, and/or bezels are on file with the manufacturer and the licensed importer listed in Item 1.
6. Signatures:

On behalf of L & M SWISS WATCH LTD

Lumondi, Inc

a. Manufacturer/Exporter

b. Licensee/Importer

Authorized Agent

(Signature)

(Signature)

Authorized Agent

(Print Name)

(Print Name)

Date:

13. 4. 15

4/20/15

May 15, 2006

MONDAINE

Swiss Watch



M+W WATCH

Private Label

Trade Brand Watches  
Promotional Watches  
Outsourcing Services

Office:

Eizelstrasse 27  
P.O. Box  
8808 Pfäffikon SZ  
Switzerland

P +41 (0)58 666 88 00  
F +41 (0)58 666 87 00

Factory/Service Center:

Hunnenweg 4  
P.O. Box  
4503 Solothurn  
Switzerland

P +41 (0)58 666 86 68  
F +41 (0)58 666 85 68

 Mondaine Watch Ltd

E-mail:

info@mondaine.ch

Retail CH:

P +41 (0)58 666 88 33  
F +41 (0)58 666 87 88

www.mondaine-group.com swissmarket@mondaine.ch

### CERTIFICATE


It is certified that the watches with 15 light sources / metal case shipped by Mondaine Watch Ltd. (Switzerland) and invoiced per enclosure were taken from the production lot covered by the

- Certificate of Quality Control Testing No.: 366 / July, 2009  
For 47 watches
- Certificate of Quality Control Testing No.: .....  
for .... watches
- Certificate of Quality Control Testing No.: .....  
for .... watches
- Certificate of Quality Control Testing No.: .....  
for .... watches

These certificates are on file at the consignee's office.

Certified: July, 2009

Mondaine Watch Ltd.

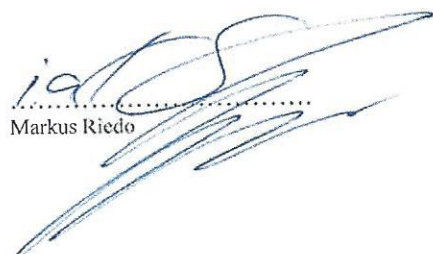  
Markus Riedo



**MONDAINE**

Swiss Watch



**M+WATCH**

**Private Label**

Trade Brand Watches  
Promotional Watches  
Outsourcing Services

Office:

Etzelstrasse 27  
P.O. Box  
8808 Pfäffikon SZ  
Switzerland

P +41 (0)58 666 88 00  
F +41 (0)58 666 87 00

Factory/Service Center:

Hunnenweg 4  
P.O. Box  
4503 Solothurn  
Switzerland

P +41 (0)58 666 86 68  
F +41 (0)58 666 85 68

**Mondaine Watch Ltd**

E-mail:

info@mondaine.ch

Retail CH:

P +41 (0)58 666 88 33  
F +41 (0)58 666 87 88

www.mondaine-group.com swissmarket@mondaine.ch

**CERTIFICATE OF QUALITY CONTROL TESTING No. 366 / July 2009**  
**PRODUCTION LOT NO. 34'000**

**ANALOG WRISTWATCH MODEL WITH 15 LIGHT SOURCES / METAL CASE**

**Activity:**

**25 mCi T as gaseous tritium light sources**

**US NRC Registry No.:**

**NR 446-D-103-E**

**US NRC License No.:**

**29-23921-01 (of Luminox Company, USA)**

**NYS, DOL Radiactive Material License No.:**

**2641-3921**

**1. Requirements on sources used for wristwatches with 15 light sources, metal case**

All sources used are taken from production lots exhibiting leakage of less than 50nCi T / 24 hours per batch of min. **15** sources.  
Results of 100% test per ANSI N43.4, section 8.3.2. are on file at Mondaine Watch Ltd, Zurich, Switzerland

**2. Requirements of Production Lots of Finished Watches**

2.1 100 % visual inspection in dark room for absence of dislodged, dim or black sources.

2.2 Random samples testing per MIL-Std-105D, level S4, AQL 1% for

- visual control for marking on dial and case bottom

- drop from 1 m height to a steel plate followed by visual inspection for absence of dislodged, dim, dark and broken sources

- leakage test per 8.3.2. ANSI N43.4 to a max. of 50 nCi T per 24 hours

**FAX No:**  
366/cg**Date:**  
July 15, 2009**Page:**  
1/1**Mondaine Watch Ltd.****Leakage test**

Dear Sirs,

Please find under mentioned the results of the accomplished "leakage test" (ANSI 43.4-2000, Sec. 8.3.2) of the Luminor watches which we received from your company.

Watch reference: 15 LLT / metal  
Lot no. :  
Lot size: 34'000 pcs  
Manufactured:

Herewith we confirm that all watches did not exceed the limit of 50 nCi/24 h.

1	2.4	2	1.1
3	1.2	4	0.4
5	0.7	6	1.6
7	0.6	8	1.1
9	0.9	10	0.4
11	0.9	12	0.7
13	0.9	14	0.6
15	0.6	16	0.4
17	2.4	18	0.7
19	1.2	20	0.7
21	1.2	22	2.9
23	0.7	24	1.2
25	1.1	26	1.4
27	0.6	28	1.4
29	0.9	30	1.1
31	1.1	32	0.7
33	0.9	34	-0.3
35	0.7	36	1.1
37	0.6	38	0.7

# mb-microtec

self-activated illumination

mb-microtec ag  
Freiburgstrasse 634  
3172 Niederwangen  
Switzerland

Tel +41 (0)31 980 20 20  
Fax +41 (0)31 980 20 21  
www.mbmicrotec.com

39	0.2	40	0.0
41	0.6	42	2.7
43	0.9	44	0.7
45	1.4	46	0.7
47	1.1	48	0.2
49	0.0	50	0.7

Yours faithfully  
mb-microtec ag



Marika Ellyatt



## Certificate of Design Conformity Compliance

The undersigned, by its duly authorized officers, who are fully cognizant of the procedures used, do hereby state:

1. This shipment made on 09.04.2015 (date) from exporter L&M SWISS WATCH LTD of devices manufactured by ☒ Mb-Microtec AG Horoswiss SA to Lumondi, Inc. (licensee/importer) contains 483 applicable timepieces with gaseous tritium light sources (GTLS) attached to dials, hands, and bezels. The GTLS used were manufactured by Mb-Microtec AG, registered with USNRC under SSR No: NR-446-S-102-S
2. Lumondi, Inc., the consignee of the above shipment holds USNRC Radioactive Materials License No. 29-23921-01 and USNRC Exempt Distribution Licence No. 29-23921-02E to import, store, and initially transfer the timepieces of the shipment.
3. The timepieces, hands and dials of this shipment were manufactured in accordance with one or more standards set forth by the following: International Atomic Energy Agency, International Standards Organization, OECD Nuclear Energy Agency, American National Standards Institute, or equivalent industry standard.
4. The timepieces, hands and dials of this shipment comply with the requirements of 10 CFR 32.14,.30.15, and with the information submitted with the application to the USNRC license under Item 2, in particular:
  - Only dials, hands, and bezels are used from tested and accepted production lots;
  - The activity per timepiece is limited to 25mCi (925 MBq) T per timepiece, to 5 mCi (185 MBq) T per hand, and to 15mCi (555 MBq) T per dial plus bezel (if any).
5. Certificates of GTLS testing and of quality control testing on production lots of dials, ands, and/or bezels are on file with the manufacturer and the licensed importer listed in Item 1.
6. Signatures:

On behalf of L & M SWISS WATCH LTD

Lumondi, Inc

a. Manufacturer/Exporter

b. Licensee/Importer

Authorized Agent

(Signature)

(Signature)

Authorized Agent

(Print Name)

(Print Name)

Date:

May 15, 2006

**MONDAINE**

Swiss Watch



**M+W** WATCH

**Private Label**

Trade Brand Watches  
Promotional Watches  
Outsourcing Services

Office:

Etzelstrasse 27  
P.O. Box  
8808 Pfäffikon SZ  
Switzerland

P +41 (0)58 666 88 00  
F +41 (0)58 666 87 00

Factory/Service Center:

Hunnenweg 4  
P.O. Box  
4503 Solothurn  
Switzerland

P +41 (0)58 666 86 68  
F +41 (0)58 666 85 68

**M**ondaine Watch Ltd

E-mail:  
info@mondaine.ch

Retail CH:  
P +41 (0)58 666 88 33  
F +41 (0)58 666 87 88

www.mondaine-group.com swissmarket@mondaine.ch

**CERTIFICATE**


It is certified that the watches with 15 light sources / carbon case shipped by Mondaine Watch Ltd. (Switzerland) and invoiced per enclosure were taken from the production lot covered by the

- Certificate of Quality Control Testing No.: 357 / November, 2012  
For 80 watches
- Certificate of Quality Control Testing No.: .....  
for ..... watches
- Certificate of Quality Control Testing No.: .....  
for .... watches
- Certificate of Quality Control Testing No.: .....  
for .... watches

These certificates are on file at the consignee's office.

Certified: November , 2012

Mondaine Watch Ltd.

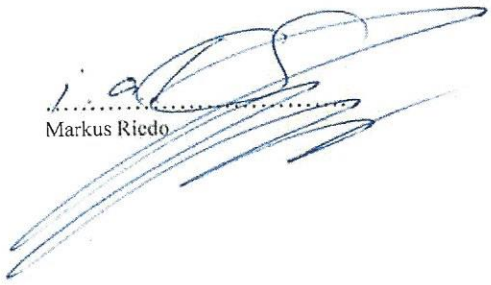  
Markus Riedo

**MONDAINE**

Swiss Watch



**M+WATCH**

**Private Label**

Trade Brand Watches  
Promotional Watches  
Outsourcing Services

Office:

Etzelstrasse 27  
P.O. Box  
8808 Pfäffikon SZ  
Switzerland

P +41 (0)58 666 88 00  
F +41 (0)58 666 87 00

Factory/Service Center:

Hunnenweg 4  
P.O. Box  
4503 Solothurn  
Switzerland

P +41 (0)58 666 86 68  
F +41 (0)58 666 85 68

**Mondaine Watch Ltd**

E-mail:  
info@mondaine.ch

Retail CH:  
P +41 (0)58 666 88 33  
F +41 (0)58 666 87 88

www.mondaine-group.com swissmarket@mondaine.ch

**CERTIFICATE OF QUALITY CONTROL TESTING No. 357 / November, 2012**  
**PRODUCTION LOT NO. 34'000**

**ANALOG WRISTWATCH MODEL WITH 15 LIGHT SOURCES / CARBON CASE**

**Activity:** 25 mCi T as gaseous tritium light sources  
**US NRC Registry No.:** NY 1271-S-101-S  
**US NRC License No.:** NR-446-D-103E (of Luminox Company, USA)  
**NYS, DOL Radiactive Material License No.:** C2641/DH09-492

**1. Requirements on sources used for wristwatches with 15 light sources, carbon case**

All sources used are taken from production lots exhibiting leakage of less than 50nCi T / 24 hours per batch of max. **80** sources.  
Results of 100% test per ANSI N43.4-2005, section 8.3.2. are on file at Mondaine Watch Ltd, Zurich, Switzerland

**2. Requirements of Production Lots of Finished Watches**

2.1 100 % visual inspection in dark room for absence of dislodged, dim or black sources.

2.2 Random samples testing per MIL-Std-105D, level S4, AQL 1% for

- visual control for marking on dial and case bottom

- drop from 1 m height to a steel plate followed by visual inspection for absence of dislodged, dim, dark and broken sources

- leakage test per 8.3.2. ANSI N43.4-2005 to a max. of 50 nCi T per 24 hours



## CERTIFICATE

### Watch quality test approval

No. 90389, page 1 of 2

Documentation data of subjects being tested in accordance to

**ANSI N43.4-2005 (ANSI N540)**

---

Manufacturer	Mondaine Watch Ltd.	Brand	Luminox
Main-Model-Ref.	A.3081.BO	US NRC Model No.	100/1
Leakage-Test-Lot. No	357	Lot Size	34'000 watches
Manufactured	October 2012	Watch type	wrist, analog
Activity (T2 gas)	max. 25 mCi	Model-Category no.	YN-15-YYN-Y-PR-025

---

#### 1. Applicable license

US NRC Registry No.: NY 1271-S-101-S  
US NRC License No.: NR-446-D-103E of mb-microtec (USA) Inc. dated July 13, 2011  
NYS, DOH License No.: C2641/DH09-492

#### 2. Requirements on sources used for the watch

All sources used are taken from production lots exhibiting leakage of less than 50 nCi T2 / 24 hours per batch of max. 80 sources.  
Results of 100% test per ANSI N43.4-2005, section 8.3.2. are on file at mb-microtec Inc., Niederwangen, Switzerland.

#### 3. Requirements of Production Lots of Finished Watches

- 3.1 100% Visual control for marking on dial and case bottom, absence of dark or dim, displaced lights.
- 3.2 Random samples testing per MIL-Std-105D, level S4, AQL 1% for
- Drop from 1m height on a steel plate, followed by visual inspection for absence of dislodged, dim, dark and broken sources, black sources.
  - Leakage test per 8.3.2. ANSI N43.4-2005 to a max. of 50 nCi T per 24 hours.

AA 11.1.4\_Watch quality test approval certificate USA V09 2011

Certificate no. , page 2 of 2

**4. Results of tests**

4.1 Visual inspection, as per point 3.1

Markings: passed  
Lights: passed

4.2 Random sample test, as per point 3.2


Sample size: 50 pcs

Drop test: passed  
Leakage test: passed

Leakage test results – see enclosed watch leakage test

**Production lot is accepted**

Authorized signature:

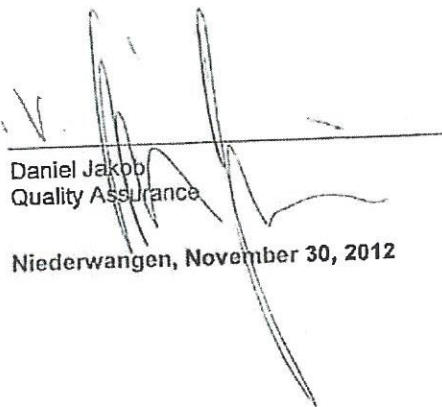  
Daniel Jakob  
Quality Assurance

Niederwangen, November 30, 2012

## Certificate of Design Conformity Compliance

The undersigned, by its duly authorized officers, who are fully cognizant of the procedures used, do hereby state:

1. This shipment made on 09.04.2015 (date) from exporter L&M SWISS WATCH LTD of devices manufactured by ☒ Mb-Microtec AG Horoswiss SA to Lumondi, Inc. (licensee/importer) contains 80 applicable timepieces with gaseous tritium light sources (GTLS) attached to dials, hands, and bezels. The GTLS used were manufactured by Mb-Microtec AG, registered with USNRC under SSR No: NR-446-S-102-S
2. Lumondi, Inc., the consignee of the above shipment holds USNRC Radioactive Materials License No. 29-23921-01 and USNRC Exempt Distribution Licence No. 29-23921-02E to import, store, and initially transfer the timepieces of the shipment.
3. The timepieces, hands and dials of this shipment were manufactured in accordance with one or more standards set forth by the following: International Atomic Energy Agency, International Standards Organization, OECD Nuclear Energy Agency, American National Standards Institute, or equivalent industry standard.
4. The timepieces, hands and dials of this shipment comply with the requirements of 10 CFR 32.14,.30.15, and with the information submitted with the application to the USNRC license under Item 2, in particular:
  - Only dials, hands, and bezels are used from tested and accepted production lots;
  - The activity per timepiece is limited to 25mCi (925 MBq) T per timepiece, to 5 mCi (185 MBq) T per hand, and to 15mCi (555 MBq) T per dial plus bezel (if any).
5. Certificates of GTLS testing and of quality control testing on production lots of dials, ands, and/or bezels are on file with the manufacturer and the licensed importer listed in Item 1.
6. Signatures:

On behalf of L & M SWISS WATCH LTD

Lumondi, Inc

a. Manufacturer/Exporter

b. Licensee/Importer

Authorized Agent

(Signature)

(Signature)

Authorized Agent

(Print Name)

(Print Name)

Date:

13.4.15

9/22/15

May 15, 2006



**MONDAINE**  
Swiss Watch



**M+W** WATCH

**Private Label**

Trade Brand Watches  
Promotional Watches  
Outsourcing Services

Office:

Etzelstrasse 27  
P.O. Box  
8808 Pfäffikon SZ  
Switzerland

P +41 (0)58 666 88 00  
F +41 (0)58 666 87 00

Factory/Service Center:

Hunnenweg 4  
P.O. Box  
4503 Solothurn  
Switzerland

P +41 (0)58 666 86 68  
F +41 (0)58 666 85 68

**M**ondaine Watch Ltd

E-mail:  
info@mondaine.ch

Retail CH:  
P +41 (0)58 666 88 33  
F +41 (0)58 666 87 88

www.mondaine-group.com swissmarket@mondaine.ch

### CERTIFICATE


It is certified that the watches with 14 light sources / metal case shipped by Mondaine Watch Ltd. (Switzerland) and invoiced per enclosure were taken from the production lot covered by the

- Certificate of Quality Control Testing No.: 385 / February, 2014  
For 612 watches
- Certificate of Quality Control Testing No.: .....  
for ..... watches
- Certificate of Quality Control Testing No.: .....  
for .... watches
- Certificate of Quality Control Testing No.: .....  
for .... watches

These certificates are on file at the consignee's office.

Certified: February, 2014

Mondaine Watch Ltd.

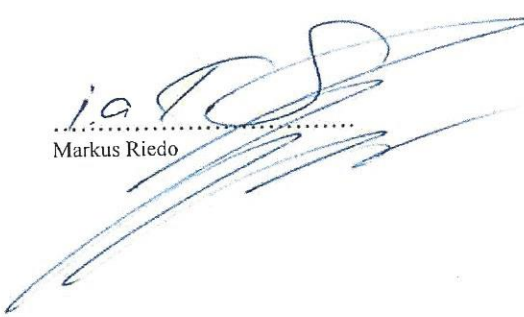  
Markus Riedo

**MONDAINE**

Swiss Watch

**M+W WATCH**

Private Label

Trade Brand Watches  
Promotional Watches  
Outsourcing Services

Office:

Etzelstrasse 27  
P.O. Box  
8808 Pfäffikon SZ  
SwitzerlandP +41 (0)58 666 88 00  
F +41 (0)58 666 87 00

Factory/Service Center:

Hunnenweg 4  
P.O. Box  
4503 Solothurn  
SwitzerlandP +41 (0)58 666 86 68  
F +41 (0)58 666 85 68

E-mail:

info@mondaine.ch

Retail CH:

P +41 (0)58 666 88 33  
F +41 (0)58 666 87 88

www.mondaine-group.com swissmarket@mondaine.ch

**Mondaine Watch Ltd**

**CERTIFICATE OF QUALITY CONTROL TESTING No. 385 / February 2014**  
**PRODUCTION LOT NO. 34'000**

ANALOG WRISTWATCH MODEL WITH 14 LIGHT SOURCES / METAL CASE

**Activity:** 25 mCi T as gaseous tritium light sources  
**US NRC Model No.:** 100 / 1  
**US NRC License No.:** 29-23921-01 (of Luminox Company, USA)  
**NYS, DOL Radiactive Material License No.:** 94011

**1. Requirements on sources used for wristwatches with 14 light sources, metal case**

All sources used are taken from production lots exhibiting leakage of less than 50nCi T / 24 hours per batch of max. 80 sources.  
 Results of 100% test per ANSI N43.4-2005, section 8.3.2. are on file at mb-microtec Inc., Niederwangen, Switzerland

**2. Requirements of Production Lots of Finished Watches**

2.1 100 % visual inspection in dark room for absence of dislodged, dim or black sources.

2.2 Random samples testing per MIL-Std-105D, level S4, AQL 1% for

- visual control for marking on dial and case bottom
- drop from 1 m height to a steel plate followed by visual inspection for absence of dislodged, dim, dark and broken sources
- leakage test per 8.3.2. ANSI N43.4 to a max. of 50 nCi T per 24 hours

## CERTIFICATE

### Watch quality test approval (Leakage Test only)

No. 94011

Documentation data of subjects being tested in accordance to

**ANSI N43.4-2005 (ANSI N540)**

---

Manufacturer	Mondaine Ltd.	Brand	Luminox
Main-Model-Ref.	A.1941	US NRC Model No.	100 / 1
Leakage-Lot. No.	385	Lot Size	34'000 watches
Manufactured	December 2013	Watch type	wrist, analog
Activity (T2 gas)	max. 25 mCi	Model-Category no.	YN-14-NY-YYNN-GT-025

---

#### 1. Requirements on sources used for the watch

All sources used are taken from production lots exhibiting leakage of less than 50 nCi T2 / 24 hours per batch of max. 80 sources.  
Results of 100% test per ANSI N43.4-2005, section 8.3.2. are on file at mb-microtec Inc., Niederwangen, Switzerland.

#### 2. Requirements of Leakage Test


- Leakage test per 8.3.2. ANSI N43.4-2005 to a max. of 50 nCi T per 24 hours.

#### 3. Results of tests

- 3.1 Visual inspection, as per point 3.1  
Markings: passed  
Lights: passed
- 3.2 Random sample test, as per point 3.2  
Sample size: 50 pcs  
Leakage test: passed Leakage test results – see enclosed watch leakage test

**Production lot is accepted**

Authorized signature:



Daniel Jakob  
Quality Assurance

Niederwangen, February 7, 2014



## Watch Test

**Producer:** MONDAINE  
**Category no.:** YN-14-NY-YYNN-GT-025  
**Batch no.:** 385  
**Model:** A.1941  
**Certificate no.:** 94011  
**Qty of watches:** 50

### Drop Test :

Test procedures were followed according to ANSI N43.4-2005 paragraph 7.6

The watches were dropped from one meter high onto a steel plate.

**Date:** 04.02.2014

**Results:** OK

### Leakage Test:

Test procedures were followed according to ANSI N540 paragraph 8.3.2

**Test time:** 24 h  
**Test medium:** water 29g  
**Date:** 05.02.2014  
**Blind:** 34  
**Efficiency:** 26.00%

**Results:** OK

Qty	Value in cpm	Diff. to blind	Value in Bq/ml	nCi/watch*24h
1	53.62	19.62	1.26	1.00
2	45.88	11.88	0.76	0.61
3	55.83	21.83	1.40	1.12
4	47.54	13.54	0.87	0.69
5	45.88	11.88	0.76	0.61
6	40.91	6.91	0.44	0.35
7	34.83	0.83	0.05	0.04
8	40.91	6.91	0.44	0.35
9	39.25	5.25	0.34	0.27
10	48.65	14.65	0.94	0.75
11	50.30	16.30	1.04	0.83
12	40.35	6.35	0.41	0.33
13	35.93	1.93	0.12	0.10
14	36.48	2.48	0.16	0.13
15	44.22	10.22	0.66	0.52
16	47.54	13.54	0.87	0.69
17	43.67	9.67	0.62	0.50
18	42.57	8.57	0.55	0.44
19	44.78	10.78	0.69	0.55
20	55.83	21.83	1.40	1.12

# mb microtec

self activated illumination

mb-microtec ag  
Freiburgstrasse 63d  
3172 Niederwangen  
Switzerland

Tel +41 (0)31 980 20 20  
Fax +41 (0)31 980 20 21  
www.mbmicrotec.com

Category no.: YN-14-NY-YYNN-GT-025 Certificate no.: 94011  
Batch no.: 385 Qty of watches: 50

21	35.93	1.93	0.12	0.10
22	47.54	13.54	0.87	0.69
23	39.80	5.80	0.37	0.30
24	43.12	9.12	0.58	0.47
25	66.33	32.33	2.07	1.66
26	55.28	21.28	1.36	1.09
27	48.09	14.09	0.90	0.72
28	68.55	34.55	2.21	1.77
29	59.15	25.15	1.61	1.29
30	40.91	6.91	0.44	0.35
31	58.60	24.60	1.58	1.26
32	92.32	58.32	3.74	2.99
33	75.73	41.73	2.68	2.14
34	176.89	142.89	9.16	7.32
35	338.86	304.86	19.54	15.61
36	44.78	10.78	0.69	0.55
37	43.12	9.12	0.58	0.47
38	51.41	17.41	1.12	0.89
39	38.70	4.70	0.30	0.24
40	47.54	13.54	0.87	0.69
41	66.33	32.33	2.07	1.66
42	51.96	17.96	1.15	0.92
43	90.11	56.11	3.60	2.87
44	82.37	48.37	3.10	2.48
45	207.30	173.30	11.11	8.87
46	52.52	18.52	1.19	0.95
47	174.13	140.13	8.98	7.17
48	66.33	32.33	2.07	1.66
49	156.44	122.44	7.85	6.27
50	72.97	38.97	2.50	2.00
				1.73
67.76		33.76	2.16	

Authorized signature:

  
Maxime Dubois



trigalight  
technology

traser  
watches

systems

## Certificate of Design Conformity Compliance

The undersigned, by its duly authorized officers, who are fully cognizant of the procedures used, do hereby state:

1. This shipment made on 09.04.2015 (date) from exporter L & M SWISS WATCH LTD of devices manufactured by x Mb-Microtec AG        Horoswiss SA to Lumondi, Inc. (licensee/importer) contains 612 applicable timepieces with gaseous tritium light sources (GTLS) attached to dials, hands, and bezels. The GTLS used were manufactured by Mb-Microtec AG, registered with USNRC under SSR No: NR-446-S-102-S
2. Lumondi, Inc., the consignee of the above shipment holds USNRC Radioactive Materials License No. 29-23921-01 and USNRC Exempt Distribution Licence No. 29-23921-02E to import, store, and initially transfer the timepieces of the shipment.
3. The timepieces, hands and dials of this shipment were manufactured in accordance with one or more standards set forth by the following: International Atomic Energy Agency, International Standards Organization, OECD Nuclear Energy Agency, American National Standards Institute, or equivalent industry standard.
4. The timepieces, hands and dials of this shipment comply with the requirements of 10 CFR 32.14, .30.15, and with the information submitted with the application to the USNRC license under Item 2, in particular:
  - Only dials, hands, and bezels are used from tested and accepted production lots;
  - The activity per timepiece is limited to 25mCi (925 MBq) T per timepiece, to 5 mCi (185 MBq) T per hand, and to 15mCi (555 MBq) T per dial plus bezel (if any).
5. Certificates of GTLS testing and of quality control testing on production lots of dials, ands, and/or bezels are on file with the manufacturer and the licensed importer listed in Item 1.
6. Signatures:

On behalf of L & M SWISS WATCH LTD

Lumondi, Inc

a. Manufacturer/Exporter

b. Licensee/Importer

Authorized Agent

(Signature)

(Signature)

Authorized Agent

(Print Name)

(Print Name)

Date:

May 15, 2006



**MONDAINE**

Swiss Watch



**M+WATCH**

**Private Label**

Trade Brand Watches  
Promotional Watches  
Outsourcing Services

Office:

Etzelstrasse 27  
P.O. Box  
8808 Pfäffikon SZ  
Switzerland

P +41 (0)58 666 88 00  
F +41 (0)58 666 87 00

Factory/Service Center:

Hunnenweg 4  
P.O. Box  
4503 Solothurn  
Switzerland

P +41 (0)58 666 86 68  
F +41 (0)58 666 85 68

**Mondaine Watch Ltd**

E-mail:

info@mondaine.ch

Retail CH:

P +41 (0)58 666 88 33  
F +41 (0)58 666 87 88

www.mondaine-group.com swissmarket@mondaine.ch

**CERTIFICATE**

It is certified that the watches with 8 light sources / carbon case shipped by Mondaine Watch Ltd. (Switzerland) and invoiced per enclosure were taken from the production lot covered by the


- Certificate of Quality Control Testing No.: 13820 / April, 2010  
For 100 watches
- Certificate of Quality Control Testing No.: .....  
for .... watches
- Certificate of Quality Control Testing No.: .....  
for .... watches
- Certificate of Quality Control Testing No.: .....  
for .... watches

These certificates are on file at the consignee's office.

Certified: April, 2010

Mondaine Watch Ltd.

19  
Markus Riedo

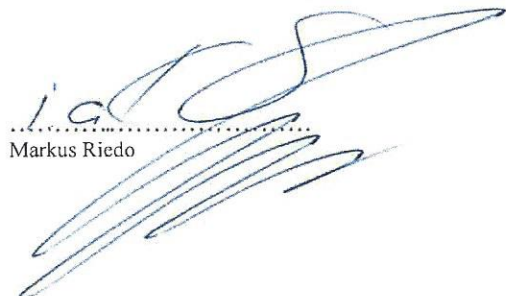

**MONDAINE**

Swiss Watch

**M+W** WATCH

Private Label

Trade Brand Watches

Promotional Watches

Outsourcing Services

Office:

Etzelstrasse 27

P.O. Box

8808 Pfäffikon SZ

Switzerland

P +41 (0)58 666 88 00

F +41 (0)58 666 87 00

Factory/Service Center:

Hunnenweg 4

P.O. Box

4503 Solothurn

Switzerland

P +41 (0)58 666 86 68

F +41 (0)58 666 85 68

**Mondaine Watch Ltd**

E-mail:

info@mondaine.ch

Retail CH:

P +41 (0)58 666 88 33

F +41 (0)58 666 87 88

www.mondaine-group.com swissmarket@mondaine.ch

## CERTIFICATE OF QUALITY CONTROL TESTING No. 13820 / April 2010 PRODUCTION LOT NO. 34'000

ANALOG WRISTWATCH MODEL WITH 8 LIGHT SOURCES / CARBON CASE

**Activity:** 25 mCi T as gaseous tritium light sources  
**US NRC Registry No.:** NR 446-D-103-E  
**US NRC License No.:** 29-23921-01 (of Luminor Company, USA)  
**NYS, DOL Radiactive Material License No.:** 2641-3921

### 1. Requirements on sources used for wristwatches with 8 light sources, carbon case

All sources used are taken from production lots exhibiting leakage of less than 50nCi T / 24 hours per batch of min. 8 sources.  
 Results of 100% test per ANSI N43.4, section 8.3.2. are on file at Mondaine Watch Ltd, Zurich, Switzerland

### 2. Requirements of Production Lots of Finished Watches

2.1 100 % visual inspection in dark room for absence of dislodged, dim or black sources.

2.2 Random samples testing per MIL-Std-105D, level S4, AQL 1% for

- visual control for marking on dial and case bottom

- drop from 1 m height to a steel plate followed by visual inspection for absence of dislodged, dim, dark and broken sources

- leakage test per 8.3.2. ANSI N43.4 to a max. of 50 nCi T per 24 hours

## CERTIFICATE

CNR 13820, page 1 of 2

PRODUCTION LOT NO. 303

ANALOG WRISTWATCH MODEL 100/1

**Activity:**

**US NRC Registry No.:**

**US NRC License No.:**

**NYS, DOH License No.:**

max. 25 mCi T2 as gaseous tritium light sources

NY 1271-S-101-S

NR 31-23712-01E of mb-microtec (USA) Inc.

2641-3912

1. **Requirements on sources used for 100/1 watch**

All sources used are taken from production lots exhibiting leakage of less than 50 nCi T2 / 24 hours per batch of min. 8 sources. Results of 100% test per ANSI N43.4-2005, section 8.3.2. are on file at mb-microtec Inc., Niederrangen, Switzerland.

2. **Requirements of Production Lots of Finished Watches**

- 2.1. 100 % visual inspection in dark room for absence of dislodged, dim or black sources.
- 2.2. Random samples testing per MIL-Std-105D, level S4, AQL 1% for
  - visual control for marking on dial and case bottom
  - drop from 1 m height to a steel plate followed by visual inspection for absence of dislodged, dim, dark and broken sources
  - leakage test per 8.3.2. ANSI N43.4-2005 to a max. of 50 nCi T per 24 hours



## RESULTS OF PRODUCTION LOT NO.: 303

Lot Size: 34'000 pcs

Manufactured: April 2010

Results 100% Visual Inspection 2.1: all passed

Results Random Sample Test 2.2: all passed

Sample Size: 50 pcs

Markings: O.K.

Drop test: O.K.


Leakage: O.K.

[nCi/24h]

Watch 1: 0.2	Watch 19: 0.4	Watch 37: 0.4
Watch 2: 0.3	Watch 20: 0.1	Watch 38: 0.3
Watch 3: 0.1	Watch 21: 0.3	Watch 39: 0.2
Watch 4: 0.3	Watch 22: 0.2	Watch 40: 0.2
Watch 5: 0.0	Watch 23: 0.1	Watch 41: 0.2
Watch 6: 0.2	Watch 24: 0.2	Watch 42: 0.3
Watch 7: 0.1	Watch 25: 0.3	Watch 43: 0.2
Watch 8: 0.1	Watch 26: 0.3	Watch 44: 0.2
Watch 9: 0.1	Watch 27: 0.4	Watch 45: 0.4
Watch 10: 0.2	Watch 28: 0.1	Watch 46: 0.0
Watch 11: 0.4	Watch 29: 0.3	Watch 47: 0.1
Watch 12: 0.1	Watch 30: 0.4	Watch 48: 0.2
Watch 13: 0.1	Watch 31: 0.1	Watch 49: 0.3
Watch 14: 0.3	Watch 32: 0.3	Watch 50: 0.1
Watch 15: 0.3	Watch 33: 0.3	
Watch 16: 0.2	Watch 34: 0.2	
Watch 17: 0.2	Watch 35: 0.2	
Watch 18: 0.1	Watch 36: 0.4	

Production lot is accepted

Authorized signature:

  
 Daniel Jakob  
 Quality Assurance

Niederwangen, April 26, 2010



## Certificate of Design Conformity Compliance

The undersigned, by its duly authorized officers, who are fully cognizant of the procedures used, do hereby state:

1. This shipment made on 09.04.2015 (date) from exporter L & M SWISS WATCH LTD of devices manufactured by x Mb-Microtec AG        Horoswiss SA to Lumondi, Inc. (licensee/importer) contains 100 applicable timepieces with gaseous tritium light sources (GTLS) attached to dials, hands, and bezels. The GTLS used were manufactured by Mb-Microtec AG, registered with USNRC under SSR No: NR-446-S-102-S
2. Lumondi, Inc., the consignee of the above shipment holds USNRC Radioactive Materials License No. 29-23921-01 and USNRC Exempt Distribution Licence No. 29-23921-02E to import, store, and initially transfer the timepieces of the shipment.
3. The timepieces, hands and dials of this shipment were manufactured in accordance with one or more standards set forth by the following: International Atomic Energy Agency, International Standards Organization, OECD Nuclear Energy Agency, American National Standards Institute, or equivalent industry standard.
4. The timepieces, hands and dials of this shipment comply with the requirements of 10 CFR 32.14, 30.15, and with the information submitted with the application to the USNRC license under Item 2, in particular:
  - Only dials, hands, and bezels are used from tested and accepted production lots;
  - The activity per timepiece is limited to 25mCi (925 MBq) T per timepiece, to 5 mCi (185 MBq) T per hand, and to 15mCi (555 MBq) T per dial plus bezel (if any).
5. Certificates of GTLS testing and of quality control testing on production lots of dials, and/or bezels are on file with the manufacturer and the licensed importer listed in Item 1.
6. Signatures:

On behalf of L & M SWISS WATCH LTD

Lumondi, Inc

a. Manufacturer/Exporter

b. Licensee/Importer

Authorized Agent

(Signature)

(Signature)

Authorized Agent

(Print Name)

(Print Name)

Date:

13.4.15

4/20/15

May 15, 2006





# PORTRAIT SHEET



## NAVY SEAL COLOMARK 3050 SERIES, 44 MM

- THIS WATCH IS THE ORIGIN OF LUMINOX
- DESIGNED FOR USE UNDER DEMANDING CONDITIONS
- BESTSELLER UNTIL TODAY

Article	Case	Dial	Color of light tubes in darkness					Band/Color
			Bezel	Dial 12H	Dial 1-11H	Hand Hour/Min.	Sec.	
3051	Black	Black/White	Green	Green	Blue	Green	Green	Black PU
3051.BO	Black	BlackIce Blue	Orange	Ice Blue	Ice Blue	Ice Blue	Ice Blue	Black PU
3052	Black	Black/White	Green	Green	Blue	Green	Green	Black Polym.Bracelet
3052.BO	Black	BlackIce Blue	Orange	Ice Blue	Ice Blue	Ice Blue	Ice Blue	Black Polym. Bracelet
3053	Black	Black/Blue	Yellow	Yellow	Blue	Yellow	Ice Blue	Black PU
3057.WO	White	White/Silver	Ice Blue	Ice Blue	White	White	White	White PU
3159	Black	Black/Orange	Orange	Orange	Yellow	Yellow	Green	Black PU
3167	Black	Black/Green	Ice Blue	Ice Blue	Green	Ice Blue	Green	Black PU

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	44mm
Water Resistance	200 meters, 20 ATM, 600 feet, individually tested
Movement	RONDA 515 HH6
Battery/Battery life	395/60 months
Case	PC carbon reinforced (white case/bezel/case back: PC glass-fibre reinforced)
Bezel	PC carbon reinforced, unidirectional turning bezel, at 12h fitted with colored light tube with sapphire crystal.
Case back	PC carbon reinforced
Crystal	Mineral, especially hardened
Crown	316L stainless steel
Height	13,88mm
Weight	65g

### Standard band

FP.3050.20	Black PU signature strap with steel brushed signature buckle, loop-lock, 23mm
FP.3050.10	White PU signature strap with steel brushed signature buckle, loop-lock, 23mm
FP.3050.23BPL	Black Polymer bracelet with IP black signature buckle, 23mm


### Standard Giftbox

GBO.L002	Eyewear signature box 160x70 x40mm, black exterior, grey interior
----------	---

### Manual

GGM.L002	Instruction Manual
----------	--------------------



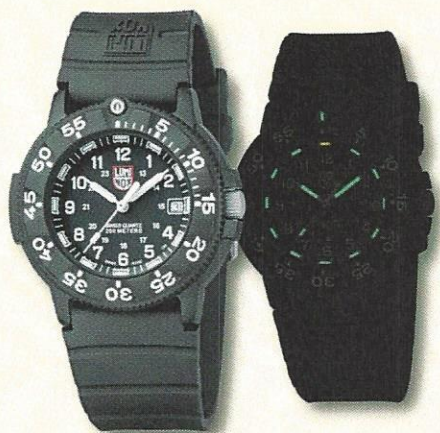

# PORTRAIT SHEET



## ORIGINAL NAVY SEAL 3000 SERIES, 43 MM

- ORIGINAL LUMI-NOX NAVY SEAL WATCH
- COMMISSIONED BY AND DEVELOPED TOGETHER WITH THE U.S. NAVY SEALS
- REMAINS A LUMI-NOX TOP SELLER

Article	Case	Dial	Color of light tubes in darkness					Band/Color
			Bezel	Dial	Dial	Hand		
				12H	1-11H	Hour/Min.	Sec.	
3001	Black	Black/White	Green	Orange	Green	Green	Green	Black PU
3001.BO	Black	Black/ Black	Ice Blue	Yellow	Ice Blue	Ice Blue	Yellow	Black PU
3003	Black	Blue/White	Green	Orange	Green	Green	Green	Black PU

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	43mm
Water Resistance	200 meters, 20 ATM, 660 feet, individually tested
Movement	RONDA 515 HH6
Battery/Battery life	395/60 months
Case	Carbon reinforced PC
Bezel	Carbon reinforced PC, unidirectional turning bezel, at 12h fitted with colored tube with sapphire crystal
Case back	Carbon reinforced PC
Crystal	Mineral, especially hardened
Crown	316L stainless steel
Height	10,97mm
Weight	46g

### Standard band

FP.LDPB	Black PU strap with steel signature buckle, 22mm
FP.3000.21HPL	Black PU strap with steel signature buckle in IP Gun plated, 22mm

### Standard Giftbox

GBO.L002	Eyewear signature box 160x70x40mm, black exterior, grey interior
----------	--

### Manual

GGM.L002.GMT	Instruction Manual
--------------	--------------------





# PORTRAIT SHEET



## ATACAMA FIELD CHRONOGRAPH ALARM 1940 SERIES, 45 MM

- ATACAMA DESERT IN CHILE IS ONE OF THE DRIEST AREAS IN THE WORLD
- RUGGED APPEAL TO CATCH THE FEELING OF THIS DESERT
- DISTRESSED LEATHER STRAPS AND ONE BRACELET VERSION

Article	Case	Dial	Color of light tubes in darkness				Band/Color
			Bezel	Dial 12H	Dial 1-11H	Hand Hour/Min. Sec.	
1941	PVD Gun	Black carbon		Orange	Green	Green	Black leather
1941.BO	PVD Black	Black carbon		Orange	Blue	Blue	Black leather
1942	PVD Gun	Black carbon		Orange	Green	Green	Steel bracelet
1943	PVD Gun	Blue		Orange	Green	Green	Grey leather
1945	PVD Black	Black/Brown		Orange	Green	Green	Brown leather
1947	PVD Gun	Ivory/Brown		Orange	Green	Green	D. brown leather

### Main Characteristics

#### Origin

Swiss Made

#### Always Visible

Constant glow for up to 25 years in any light condition

#### Size/Diameter

45mm

#### Water Resistance

100 meters, 10 ATM, 330 feet, individually tested

#### Movement

RONDA 5130.D Chronograph Alarm

#### Battery/Battery life

395/50 months

#### Case

316L PVD black or PVD gun

#### Bezel

#### Case back

316L PVD black or PVD gun, screwed, soundbox

#### Crystal

Sapphire, single antireflective coated

#### Crown

316L PVD black or PVD Gun, screwed

#### Height

13mm

#### Weight

80g

### Standard band

FM.L.BRAC.1920.IPH

FE.1920.20H.80RI

FE.1920.20B.60RI

FE.1920.71B.60RI

FE.1920.72H.80RI

FE.1920.80H.80RI

316L solid steel bracelet PVD Gun plated, with solid signature buckle, 26mm  
black leather, grey stitches, 2 PVD Gun brushed rivets and signature buckle, 26mm  
black leather, dark grey stitches, 2 PVD black brushed rivets and signature buckle, 26mm  
brown leather, d'brown stitches, 2 steel PVD black brushed rivets and signature buckle, 26mm  
dark brown leather, creamy stitches, 2 PVD gun brushed rivets and signature buckle, 26mm  
grey leather, dark grey stitches, 2 PVD gun brushed rivets and signature buckle, 26mm

### Standard Giftbox

GBO.L001

Giftbox square, grey woven carbon fibre look at top, size 110 x 110 x 84mm

### Manual

GGM.L002.GMT

GGM.L003

Instruction Manual





# PORTRAIT SHEET



## FIELD VALJOUX AUTOMATIC CHRONOGRAPH 1860 SERIES, 48 MM

- FEATURING THE FAMOUS VALJOUX 7750 MOVEMENT, RENOWNED FOR ITS RELIABILITY
- THIS IS A SPECIAL, NUMBERED SERIES

Article	Case	Dial	Color of light tubes in darkness				Band/Color
			Bezel	Dial 12H	Dial 1-11H	Hand Hour/Min. Sec.	
1861	Steel	Black		Orange	Green	Green	Black leather
1861.BO	PVD Black	Black		Yellow	Ice Blue	Ice Blue	Black leather

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	48mm
Water Resistance	100 meters, 10 ATM, 330 feet, individually tested
Movement	Valjoux 7750, Automatic Chronograph
Battery/Battery life	
Case	316L stainless steel or PVD black
Bezel	316L stainless steel or PVD black
Case back	316L stainless steel or PVD black, screwed
Crystal	Sapphire, single antireflective coated
Crown	316L stainless steel or PVD black, screwed
Height	10,8mm
Weight	16.5g

### Standard band

FE.1860.20Q	black leather, dark grey stitches, steel brushed signature buckle, 26mm
FE.1860.20B	black leather, dark grey stitches, steel PVD black brushed signature buckle, 23mm

### Standard Giftbox

GBO.L010	Black wooden box, black PU with red oval pillow for watch, size 240x140x97mm
----------	--

### Manual

GGM.L002.GMT	Instruction Manual
GGM.L010	Automatic Chrono Manual
GGM.L017.1860	Valjoux





# PORTRAIT SHEET



## ATACAMA FIELD DAY DATE 1920 SERIES, 45 MM

- ATACAMA DESERT IN CHILE IS ONE OF THE DRIEST AREAS IN THE WORLD
- RUGGED APPEAL TO CATCH THE FEELING OF THIS DESERT
- DISTRESSED LEATHER STRAPS AND ONE BRACELET VERSION

Article	Case	Dial	Color of light tubes in darkness				Band/Color
			Bezel	Dial 12H	Dial 1-11H	Hand Hour/Min. Sec.	
1921	PVD Gun	Black carbon		Orange	Green	Green	Black leather
1921.BO	PVD Black	Black carbon		Orange	Blue	Blue	Black leather
1922	PVD Gun	Black carbon		Orange	Green	Green	PVD Gun
1923	PVD Gun	Blue		Orange	Green	Green	D. Grey Leather
1925	PVD Black	Black/Brown		Orange	Green	Green	Brown leather
1927	PVD Gun	Ivory/Brown		Orange	Green	Green	D. Brown leather

### Main Characteristics

#### Origin

Swiss Made

#### Always Visible

Constant glow for up to 25 years in any light condition

#### Size/Diameter

45mm

#### Water Resistance

200 meters, 20 ATM, 660 feet, individually tested

#### Movement

RONDA 517 Day-Date, HH6

#### Battery/Battery life

395/50 months

#### Case

316L PVD black or PVD gun

#### Bezel

#### Case back

316L stainless steel PVD black or gun, screwed, sapphire crystal

#### Crystal

Sapphire, single antireflective coated

#### Crown

316L PVD black or PVD Gun, screwed

#### Height

13mm

#### Weight

80g

### Standard band

FM.L.BRAC.1920.IPH

FE.1920.20H.80RI

FE.1920.20B.60RI

FE.1920.71B.60RI

FE.1920.72H.80RI

FE.1920.80H.80RI

316L solid steel bracelet PVD Gun plated, with solid signature buckle, 26mm  
black leather, grey stitches, 2 PVD Gun brushed rivets and signature buckle, 26mm  
black leather, dark grey stitches, 2 PVD black brushed rivets and signature buckle, 26mm  
brown leather, d'brown stitches, 2 steel PVD black brushed rivets and signature buckle, 26mm  
dark brown leather, creamy stitches, 2 PVD Gun brushed rivets and signature buckle, 26mm  
grey leather, dark grey stitches, 2 PVD Gun brushed rivets and signature buckle, 26mm

### Standard Giftbox

GBO.L001

Giftbox square, grey woven carbon fibre look at top, size 110 x 110 x 84mm

### Manual

GGM.L002.GMT

Instruction Manual





# PORTRAIT SHEET



## FIELD AUTOMATIC DAY DATE 1800 SERIES, 43 MM

- AUTOMATIC DAY-DATE MOVEMENT
- SEE-THROUGH CASE BACKS TO VIEW THE MOVEMENT
- SMOOTH BUFFALO LEATHER STRAPS

Article	Case	Dial	Color of light tubes in darkness				Band/Color
			Bezel	Dial	Dial	Hand	
				12H	1-11H	Hour/Min.	Sec.
1801	Steel	Black		Orange	Green	Green	Brown leather
1801.BO	PVD Black	Black		Yellow	Ice Blue	Ice Blue	Black leather

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	43mm
Water Resistance	100 meters, 10 ATM, 330 feet, individually tested
Movement	ETA 2878 Automatic Day-Date, HH5
Battery/Battery life	
Case	316L stainless steel or PVD black
Bezel	316L stainless steel or PVD black, fix bezel
Case back	316L stainless steel or PVD black, screwed, sapphire crystal
Crystal	Sapphire, single antireflective coated
Crown	316L stainless steel or PVD black, screwed
Height	13,3mm
Weight	91g

### Standard band

FE.1800.20Q	black leather, creamy stitches, steel brushed signature buckle, 23mm
FE.1800.20B	black leather, d'grey stitches, steel brushed signature buckle, 23mm

### Standard Giftbox

GBO.L017	Black wooden box, black PU with red oval pillow for watch, size 240 x 140 x 97 mm
----------	---

### Manual

GGM.L002.GMT	Instruction Manual
GGM.L013	Automatic Manual





# PORTRAIT SHEET



## SCOTT CASSELL SPECIALS

- SCOTT CASSELL IS AN UNDERWATER EXPLORER AND COMBAT DIVER
- PROCEEDS FROM THE PURCHASE WILL BE CONTRIBUTED TO HIS 2 ORGANISATIONS

Article	Case	Dial	Color of light tubes in darkness				Band/Color
			Bezel	Dial	Dial	Hand	
			12H			Hour/Min./Sec.	
1526	Stainl. Steel	Black/Yellow	Yellow	8x Yellow	3xWhite	Yellow/White/Yellow	Black PU
3054.SET	Black Carbon	Blue	Ice Blue	Green	Ice Blue	Green/Ice Blue/Green	Black PU

### Main Characteristics

#### Origin

#### Always Visible

#### Size/Diameter

#### Water Resistance

#### Movement

#### Battery/Battery life

#### Case

#### Bezel

#### Case back

#### Crystal

#### Crown

#### Height

#### Weight

#### Standard band

FP.1500.20

FP.1500.21

#### Standard Giftbox

GBO.L012

#### Manual

GGM.L002

GGM.L015.1500

GGM.L013

### Article 1526 (numbered edition)

Swiss Made

Constant glow for up to 25 years in any light condition

44mm

500 meters, 50 ATM, 1500 feet, individually tested. Professional Divers Norm ISO 6425 passed.

Swiss Mechanical Movement SW 200-1

316L stainless steel PVD Black, Helium release valve

316L stainless steel in PVD Black, unidirectional turning bezel, at 12h fitted with yellow light tube with sapphire crystal. Patent pending,

blocking system bezel und crown protection lever

316L stainless steel PVD black, screwed, numbered

Sapphire, double side antireflective coated

Stainless steel 316L, PVD black

17,05

158g

PU black with stainless steel PVD black buckle with loop-lock

PU black extender with stainless steel PVD black buckle, 30mm, with loop-lock

Deep Dive Special water resistant black plastic box with pressure release, 210 x 167 x 90mm, packed in black solid cardboard box

Instruction Manual

Special Booklet

Automatic Instruction Manual

### Article 3054.SET

Swiss Made

Constant glow for up to 25 years in any light condition

44mm

200 meters, 20 ATM, 600 feet, individually tested

Ronda 515 HH6

395/60 months

PC carbon reinforced

PC carbon reinforced, unidirectional turning bezel, at 12h fitted with ice blue light tube

Stainless steel 316L, PVD black

Mineral, especially hardened

Stainless steel 316L

10,95mm

40g

#### Standard band

FP.3050.20

Black PU signature strap with steel brushed signature buckle, loop-lock, 23 mm

#### Standard Giftbox

GBO.L015.SET

Luminox Diving Google Box for Scott Cassell incl. 3 additional straps, 1 tool and 1 compass set in loop, 124 x 114 x 200mm

#### Manual

GGM.L002 Instruction Manual

GGM.L020 Special Booklet





# PORTRAIT SHEET



## FIELD DAY DATE '1820/'1870 SERIES 42/47 MM

- ESSENTIAL GEAR FOR THE ADVENTURER OR OUTDOOR ENTHUSIAST
- THICK LEATHER STRAPS WITH CONTRAST STITCHING, RIVETS AND DOUBLE PRONG ROLLER BUCKLES

Article	Case	Dial	Color of light tubes in darkness				Band/Color
			Bezel	Dial 12H	Dial 1-11H	Hand Hour/Min. Sec.	
1822	Steel	Black		Orange	Green	Green	Metal bracelet
1827	Steel	Ivory		Orange	Green	Green	Brown leather
1828	Steel	Black		Orange	Green	Green	Black leather
1879.BO	PVD black	Black		Orange	Ice Blue	Ice Blue	Black leather

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	42mm (47mm for 1879.BO)
Water Resistance	200 meters, 20 ATM, 600 feet, individually tested
Movement	RONDA 517 Day-Date, HH6
Battery/Battery life	395/50 month
Case	316L stainless steel or PVD black
Bezel	316L stainless steel or PVD black
Case back	316L stainless steel or PVD black, screwed
Crystal	Sapphire, single antireflective coated
Crown	316L stainless steel or PVD black, screwed
Height	10,8mm
Weight	86g leather strap/166g metal bracelet

### Standard band

FM.L.BRAC.1820	316L solid steel bracelet with solid signature buckle, 23mm
FE.1820.20Q	black leather, creamy stitches, 2 steel brushed rivets and signature buckle, 23mm
FE.1820.71Q	brown leather, creamy stitches, 2 steel brushed rivets and signature buckle, 23mm
FE.1820.20B	brown leather, black stitches, 2 steel PVD black brushed rivets and signature buckle, 23mm

### Standard Giftbox

GBO.L001	Giftbox square, grey woven carbon fibre look at top, size 110 x 110 x 84 mm
----------	---

### Manual

GGM.L002	Instruction Manual
----------	--------------------





**LIMITED EDITION**  
TO 311 UNITS WORLDWIDE

# PORTRAIT SHEET



## TONY KANAAN VALJOUX AUTOMATIC CHRONOGRAPH 44MM 1180 SERIES

- SPECIAL SERIES DEVELOPED FOR CHAMPION INDYCAR RACE DRIVER TONY KANAAN
- FEATURING THE FAMOUS VALJOUX 7750 MOVEMENT, RENOWNED FOR ITS RELIABILITY
- STRIKING TIMEPIECE WITH AN ASSYMETRICAL 3-LAYER CASE

Article	Case	Dial	Color of light tubes in darkness				Band/Color
			Bezel	Dial	Dial	Hand	
				12H	1-11H	Hour/Min. Sec.	
1188	Steel PVD black	Black/Yellow/Green		Green	Yellow	Green	Black Leather

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	44mm
Water Resistance	100 meters, 10 ATM, 300 feet, individually tested.
Movement	Valjoux 7750, Automatic Chronograph.
Case	316L st. steel or PVD black
Bezel	Fix black ceramic bezel
Case back	316L steel in PVD black, screwed, sapphire crystal, numbering 001/311.
Glass	Sapphire glass, single antireflective coated
Crown	316L st. steel or PVD black, screwed
Height	
Weight	

### Standard band

FE.1180.20B	black leather strap with yellow/green stitches, green back lining, stainless steel PVD black buckle, 26mm
-------------	---

### Standard Giftbox

GBO.L017.TK	Watch box with removable insert, black PU outside, TK logo inside, removable green/yellow pillow for watch, 140 x 140 x 97mm
-------------	--

### Manual

GGM.L002	Instruction Manual
GGM.L016.1180	Certificate
GGM.L010	Chrono Instruction Manual





# PORTRAIT SHEET



## DEEP DIVE AUTOMATIC 1500 SERIES, 44 MM

- CERTIFIED DIVING WATCH THAT MEETS THE HIGHEST DIVING STANDARDS
- AUTOMATIC HELIUM RELEASE
- UNIQUE BEZEL LOCKING SYSTEM (PAT. PEND.)

Article	Case	Dial	Color of light tubes in darkness					Band/Color
			Bezel	Dial	Dial*	Hand		
				12H	1-11H	Hour/Min.	Sec.	
1511	Steel PVD	Black	Ice Blue	Ice Blue	Green	Green/Ice Blue	Green	Black PU
1512	Stainl. Steel	Black/White	Ice Blue	Ice Blue	Green	Green/Ice Blue	Green	Black PU
1513	Stainl. Steel	Black/White	Ice Blue	Ice Blue	Green	Green/Ice Blue	Green	Black PU

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	44mm
Water Resistance	500 meters, 50 ATM, 1500 feet, individually tested. Professional Divers Norm ISO 6425 passed.
Movement	ETA 2826-2 Automatic Time Date HH6 316L stainless steel PVD Black.
Battery/Battery life	
Case	316L PVD black or PVD gun
Bezel	316L steel in PVD Black, unidirectional turning bezel, at 12h fitted with Ice Blue light tube with sapphire crystal. Patent pending bezel lock system combined with crown protection lever.
Case back	316L stainless steel PVD black, screwed, numbered
Crystal	Sapphire, double side antireflective coated
Crown	316L stainless steel PVD black
Height	17,05mm
Weight	158g

### Standard band

FP.1500.20	Black PU with stainless steel PVD black buckle with loop-lock, 22mm
FP.1500.21	Black PU Extender with stainless steel PVD black buckle with loop-lock, 22mm
FP.1500.20Q	Black PU with stainless steel buckle with loop-lock, 22mm
FP.1500.21Q	Black PU Extender with stainless steel buckle with loop-lock, 22mm

### Standard Giftbox

GBO.L012	Deep Dive Special water resistant black plastic box with pressure release, 210 x 167 x 90mm packed in black solid cardboard box
----------	---

### Manual

GGM.L002.GMT	Instruction Manual
GGM.L015.1500	Special Booklet
GGM.L013	Automatic Instruction Manual





# PORTRAIT SHEET



## TONY KANAAN 1140 SERIES, 44 MM

**LIMITED EDITION**  
TO 1000 UNITS WORLDWIDE

- SPECIAL SERIES DEVELOPED FOR CHAMPION INDYCAR RACE DRIVER TONY KANAAN
- STRIKING TIMEPIECE WITH AN ASYMMETRICAL 3-LAYER CASE
- TK'S LOGO AT THE 4 HOUR ON THE DIAL

Article	Case	Dial	Color of light tubes in darkness				Band/Color
			Bezel	Dial 12H	Dial 1-11H	Hand Hour/Min. Sec.	
1146	Black Steel	White/Black		Green	Yellow	Green	Black/White leather
1147	Black Steel	White/Black		Green	Yellow	Green	Black PU

### Main Characteristics

<b>Origin</b>	Swiss Made
<b>Always Visible</b>	Constant glow for up to 25 years in any light condition
<b>Size/Diameter</b>	44mm
<b>Water Resistance</b>	100 meters, 10 ATM, 300 feet, individually tested
<b>Movement</b>	Ronda 5050.B Chronograph-Big Date Special HH
<b>Battery/Battery life</b>	395/54 months
<b>Case</b>	316L stainless steel PVD Black, Carbon inlay on sides
<b>Bezel</b>	Fix black ceramic bezel
<b>Case back</b>	316L stainless steel PVD black, screwed, numbering 001/999
<b>Crystal</b>	Sapphire, single antireflective coated
<b>Crown</b>	316L stainless steel PVD black
<b>Height</b>	15,45mm
<b>Weight</b>	115g

### Standard band

FP.1140.20B

FE.1140.21B

PU black with stainless steel PVD black buckle, 26mm  
Black leather strap with white stripes & black stitches, 26mm

### Standard Giftbox

GBO.L010.TK.1

Wooden box, 140 x 140 x 97mm

### Manual

GGM.L002

GGM.L016.1140.1

GGM.L001

Instruction Manual  
Certificate  
Chrono Instruction Manual





# PORTRAIT SHEET



## MODERN MARINER 6250 SERIES, 45MM

- NAUTICAL INSPIRED FEATURES
- 10 YEAR LITHIUM BATTERY
- LEATHER OR BRACELET BAND

Article	Case	Dial	Color of light tubes in darkness					Band/Color
			Bezel	Dial	Dial	Hand		
				12H	1-11H	Hour/Min.	Sec.	
6251	Steel	Black	Ice Blue	Ice Blue	Green	Ice Blue	Ice Blue	Black leather
6251.BO	Steel Black	Black	Ice Blue	Orange	Ice Blue	Ice Blue	Ice Blue	Black leather
6252	Steel	Black	Ice Blue	Ice Blue	Green	Ice Blue	Ice Blue	Steel bracelet
6252.BO	Steel Black	Black	Ice Blue	Orange	Ice Blue	Ice Blue	Ice Blue	Black Steel bracelet
6265	Steel	Black	Ice Blue	Ice Blue	Green	Ice Blue	Ice Blue	Black leather

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	45mm
Water Resistance	200 meters, 20 ATM, 600 feet, individually tested
Movement	Ronda 715 lith HH6
Battery/Battery life	Lithium CR2016 / 10 years *
Case	316L stainless steel with crown protection
Bezel	316L stainless steel, unidirectional turning bezel, at 12h fitted with colored light tube with sapphire crystal
Case back	316L stainless steel, screwed
Crystal	Sapphire glass, single antireflective coating
Crown	316L st.steel PVD black screwed
Height	10mm
Weight	98g

\* Due to the additional weight of the LLTs on the watch hands, battery life may be shorter

### Standard band

FE.6250.20Q	Black leather with black stitches, red lining, signature brushed buckle, 24mm
FE.6250.21Q	Black leather with red stitches, red lining, signature brushed buckle, 24mm
FE.6250.22B	Black leather with d'grey stitches, IP black signature brushed buckle, 24mm
FM.L.BRAC.6250	316L solid brushed steel bracelet, folded signature brushed buckle, 24mm
FM.LBRAC.6250.60	316L solid brushed steel bracelet IP black, folded signature brushed buckle, 24mm

### Standard Giftbox

GBO.L001	Giftbox square, grey, woven carbon fibre look at top 110 x 110 x 86 mm
----------	--

### Manual

GGM.L002.GMT	Instruction Manual
--------------	--------------------





# PORTRAIT SHEET



## NAVY SEAL COLOMARK CHRONOGRAPH 3080 SERIES, 44 MM

- THE CRYSTAL IS HARDENED AND TEMPERED, HIGHLY SCRATCH RESISTANT
- CASE, CASE BACK AND BEZEL ARE MADE OF MOLDED CARBON-REINFORCED POLYMER

Article	Case	Dial	Color of light tubes in darkness					Band/Color
			Bezel	Dial	Dial	Hand		
				12H	1-11H	Hour/Min.	Sec.	
3081	Black	Black/White	Green	Green	Ice Blue	Ice Blue	Green	Black PU
3081.BO	Black	Black/Black	Ice Blue	Orange	Ice Blue	Ice Blue	Ice Blue	Black PU
3082	Black	Black/White	Green	Green	Ice Blue	Ice Blue	Green	PC/Carbon Bracelet
3082.BO	Black	Black/Black	Ice Blue	Orange	Ice Blue	Ice Blue	Ice Blue	PC/Carbon Bracelet
3083	Black	Black/Blue	Yellow	Yellow	Ice Blue	Ice Blue	Yellow	Black PU
3089	Black	Black/Orange	Orange	Orange	Ice Blue	Yellow	Yellow	Black PU

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	44mm
Water Resistance	200 meters, 20 ATM, 660 feet, individually tested
Movement	Ronda 5030.D
Battery/Battery life	395/54 months
Case	PC carbon reinforced
Bezel	PC carbon reinforced, unidirectional turning bezel, at 12h fitted with colored light tube with sapphire crystal.
Case back	PC carbon reinforced
Crystal	Mineral, especially hardened
Crown	316L stainless steel
Height	14,60mm
Weight	65g

### Standard band

FP3050.20	Black PU signature strap with steel brushed signature buckle, loop-lock, 23mm
FP.3050.23BPL	Black PC & 10% carbon reinforced bracelet with IP black signature buckle, 23mm

### Standard Giftbox

GBO.L002	Eyewear signature box 160x70x40mm, black exterior, grey interior
----------	--

### Manual

GGM.L001	Instruction Manual
GGM.L014	Chrono Instruction Manual





# PORTRAIT SHEET



## SXC STEEL GMT 5120 SPACE SERIES, 45.5 MM

- WATCHES MADE FOR SPACE
- DESIGNED IN PARTNERSHIP WITH SXC (SPACE EXPEDITION CORPORATION) TO BE WORN BY THE ASTRONAUTS AND PASSENGERS OF THE SXC SPACE PROGRAM

Article	Case	Dial	Color of light tubes in darkness					Band/Color
			Dial	Dial	Hand			
			12H	1-11H	Hour/Min.	Sec.	GMT	
5121.GN	PVD Gun	Black/Gray	Ice Blue	White	White	Ice Blue	Ice Blue	Dark Gray Cordura
5127	PVD Black	Black/Gray	Ice Blue	White	White	Ice blue	Ice Blue	Black Leather

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	45.50 mm
Water Resistance	200 meters, 20 ATM, 600 feet, individually tested
Movement	Ronda 515 2 <sup>nd</sup> time zone, Special HH
Battery	395 / 60 months
Case	316L stainless steel in PVD black or PVD gun depending on the model
Bezel	316L stainless steel or PVD gun depending on the model
Case back	316L stainless steel in PVD black or PVD gun depending on the model
Crystal	Sapphire glass, single antireflective coating
Crown	316L stainless steel in PVD black or PVD Gun depending on the model
Height	14 mm
Weight	125 g

### Standard band

FE.5120.80H	Dark gray Cordura with blue stitches and blue leather lining, PVD gun stainless steel buckle, 22mm
FE.5120.20B	Black leather strap with red stitches and red leather lining, PVD black stainless steel buckle, 22mm

### Standard Giftbox

GBO.L001.SXC	Giftbox square, gray, woven carbon fibre look at top 110 x 110 x 86 mm
--------------	--

### Manual

GGM.L002	Instruction Manual
----------	--------------------





# PORTRAIT SHEET



## NAVY SEAL FASTSTRAP 3900/3950 SERIES, 43/44 MM

- ORIGINAL LUMI-NOX WATCH
- COMES WITH A VELCRO STRAP

Article	Case	Dial	Color of light tubes in darkness					Band/Color
			Bezel	Dial 12H	Dial 1-11H	Hand Hour/Min.	Sec.	
3901	Black	Black	Green	Orange	Green	Green	Green	Black Velcro
3951	Black	Black	Green	Orange	Green	Green	Green	Black Velcro

### Main Characteristics

#### Origin

Swiss Made

#### Always Visible

Constant glow for up to 25 years in any light condition

#### Size/Diameter

43mm (3901)/44mm (3951)

#### Water Resistance

200 meters, 20 ATM, 600 feet, individually tested

#### Movement

Ronda 515 HH6

#### Battery/Battery life

395/60 month

#### Case

PC carbon reinforced

#### Bezel

PC carbon reinforced, unidirectional turning bezel, at 12h fitted with colored light tube with sapphire crystal.

#### Case back

PC carbon reinforced

#### Crystal

Mineral, especially hardened

#### Crown

316L stainless steel

#### Height

10,95mm

#### Weight

40g

### Standard band

FN.3900.29

Black Velcro signature strap, Navy Seal insignia with steel brushed signature buckle, 27mm

### Standard Giftbox

GBO.L002


Eyewear signature box 160 x 70 x 40mm, black exterior, grey interior

### Manual

GGM.L002

Instruction Manual



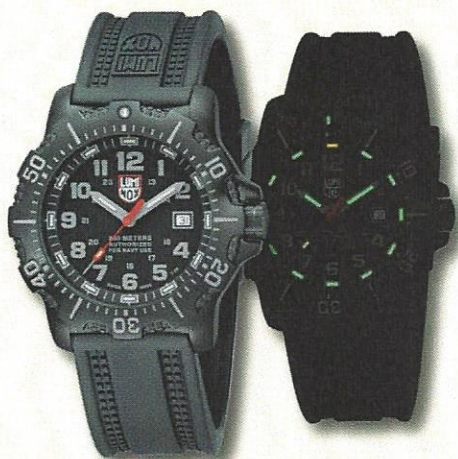

# PORTRAIT SHEET



## ANU 4200 SERIES, 45 MM

- ANU = AUTHORISED FOR NAVY USE
- FIRST LINE GEAR FOR ELITE MARITIME COMMANDOS

Article	Case	Dial	Color of light tubes in darkness					Band/Color
			Bezel	Dial	Dial	Hand		
				12H	1-11H	Hour/Min.	Sec.	
4221	Steel PVD	Black/Gray	Green	Orange	Green	Green	Green	Black PU
4221.CW	Steel PVD	Black/Gray	Green	Orange	Green	Green	Green	Black Nylon

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	45mm
Water Resistance	200 meters, 20 ATM, 660 feet, individually tested
Movement	RONDA 715 Lith HH6
Battery/Battery life	CR2060 / 10 years *
Case	316L stainless steel PVD black with crown protection
Bezel	316L stainless steel, unidirectional turning bezel, at 12h fitted with colored tube with sapphire crystal
Case back	316L stainless steel
Crystal	Sapphire glass, single antireflective coated
Crown	316L stainless steel PVD black, screwed
Height	13mm
Weight	115grams

\* Due to the additional weight of the LLTs on the watch hands, battery life may be shorter

### Standard band

FP.8800.20	Black PU signature strap with black PVD steel brushed signature buckle, loop-lock, 23 mm
FN.4220.20	Black nylon strap with nylon web and black PVD brushed steel loops, 23 mm

### Standard Giftbox

GBO.L001	Giftbox square, dark gray, 140 x 140 x 100 mm
----------	---

### Manual

GGM.L002.GMT	Instruction Manual
--------------	--------------------





# PORTRAIT SHEET



## SXC PC CARBON GMT 5020 SPACE SERIES, 45.5 MM

- WATCHES MADE FOR SPACE
- DESIGNED IN PARTNERSHIP WITH SXC (SPACE EXPEDITION CORPORATION) TO BE WORN BY THE ASTRONAUTS AND PASSENGERS OF THE SXC SPACE PROGRAM

Article	Case	Dial	Color of light tubes in darkness				Band/Color
			Dial 12H	Dial 1-11H	Hand Hour/Min.	GMT	
5021	Dark Gray	Black/White	Ice Blue	White	White	Ice Blue	Dark Gray PU
5021.GN	Dark Gray	Black/Gray	Ice Blue	White	White	Ice Blue	Dark Gray PU
5023	Dark Gray	Blue/White	Ice Blue	White	White	Ice blue	Dark Gray PU
5027	Dark Gray	Black/White	Ice Blue	White	White	Ice Blue	Dark Gray PU

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	45.50 mm
Water Resistance	200 meters, 20 ATM, 600 feet, individually tested
Movement	Ronda 515 2 <sup>nd</sup> time zone, Special HH
Battery	395 / 60 months
Case	30% Carbon reinforced polycarbonate
Bezel	30% Carbon reinforced polycarbonate (white bezel is fiber glass reinforced), Bidirectional turning bezel
Case back	10% Carbon reinforced polycarbonate
Crystal	Mineral, especially hardened
Crown	316L stainless steel IP black
Height	15 mm
Weight	64 g

### Standard band

FP.5020.20B	Dark gray PU strap, IP gun stainless steel signature buckle, 23mm
-------------	---

### Standard Giftbox

GBO.L001.SXC	Giftbox square, black, packed with special SXC sleeve, L110xW110xH86mm
--------------	--

### Manual

GGM.L002	Instruction Manual
----------	--------------------





# PORTRAIT SHEET



## NAVY SEAL STEEL COLORMARK 3150 SERIES, 44 MM

- THE COLORMARK CONCEPT IN STEEL WATCHES
- EACH FEATURES ITS OWN NIGHT ILLUMINATION COLOR PATTERN

Article	Case	Dial	Color of light tubes in darkness					Band/Color
			Bezel	Dial	Dial	Hand		
				12H	1-11H	Hour/Min.	Sec.	
3151	Steel	Black/White	Ice Blue	Yellow	Ice Blue	Ice Blue	Yellow	Black PU
3152	Steel	Black/White	Ice Blue	Yellow	Ice Blue	Ice Blue	Yellow	Steel Bracelet
3152.BO	Steel	Black/Black	Ice Blue	Orange	Ice Blue	Ice Blue	Ice Blue	Black Steel PVD

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	44mm
Water Resistance	200 meters, 20 ATM, 660 feet, individually tested
Movement	RONDA 515 HH6
Battery/Battery life	395/60 months
Case	316L stainless steel or PVD Black
Bezel	Carbon reinforced PC, unidirectional turning bezel, at 12h fitted with colored tube with sapphire crystal
Case back	316L stainless steel or PVD Black
Crystal	Mineral, especially hardened
Crown	316L stainless steel or PVD black
Height	12,70mm
Weight	100g

### Standard band

FP.3050.20	Black PU signature strap with steel brushed signature buckle, loop-lock, 23mm
FM.L.BRAC.3150.STPL	Stainless steel 316L brushed bracelet with solid signature buckle, 23mm
FM.L.BRAC.3150.60PL	Stainless steel 316L black PVD plated brushed bracelet with solid signature buckle, 23mm

### Standard Giftbox

GBO.L002	Eyewear signature box 160 x 70 x 40mm, black exterior, grey interior
----------	--

### Manual

GGM.L001	Instruction Manual
----------	--------------------





# PORTRAIT SHEET



## NAVY SEAL STEEL COLORMARK CHRONOGRAPH 3180 SERIES, 44 MM

- 44MM STAINLESS STEEL CASE FOR EXTREME CONDITIONS
- HIGHLY SCRATCH RESISTANT MINERAL GLASS

Article	Case	Dial	Color of light tubes in darkness				Band/Color	
			Bezel	Dial 12H	Dial 1-11H	Hand Hour/Min.	Big + Small Sec.	
3181	Steel	Black/White	Ice Blue	Yellow	Ice Blue	Ice Blue	SLC 1	Black PU
3182.BO	IP Black	Black/Black	Ice Blue	Yellow	Ice blue	Ice Blue	SLC 1	Black Bracelet
3182	Steel	Black/White	Ice Blue	Yellow	Ice Blue	Ice Blue	SLC 1	Bracelet

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	44mm
Water Resistance	200 meters, 20 ATM, 660 feet, individually tested
Movement	Ronda 5030.D
Battery/Battery life	395/ 54 months
Case	316L stainless steel or PVD Black
Bezel	PC carbon reinforced, unidirectional turning bezel, at 12h fitted with colored tube with sapphire crystal
Case back	316L stainless steel or PVD Black
Crystal	Mineral, especially hardened
Crown	316L stainless steel or PVD Black
Height	12,7mm
Weight	90g / 130g w. bracelet

### Standard band

FP.3050.20	Black PU signature strap with steel brushed signature buckle, loop-lock, 23mm
FM.L.BRAC.3150.STPL	Steel brushed bracelet with solid signature buckle, 23mm
FM.L.BRAC.3150.60PL	Black steel brushed bracelet with solid signature buckle, 23mm

### Standard Giftbox

GBO.L001	Giftbox square, grey, woven carbon fibre look at top, 110x110x86mm
----------	--

### Manual

GGM.L002.GMT	Instruction Manual
GGM.L014	Chrono Instruction Manual





# PORTRAIT SHEET



## F-117 NIGHTHAWK™ 3400 SERIES, 43 MM

- ORIGINAL F-117 NIGHTHAWK LICENSED BY LOCKHEED MARTIN
- ESPECIALLY DESIGNED FOR US AIR FORCE PILOTS FLYING THE F-117 NIGHTHAWK STEALTH JETS
- THE CASE BACK HAS A DETAILED ENGRAVING OF THE F-117 NIGHTHAWK STEALTH JET

Article	Case	Dial	Color of light tubes in darkness					Band/Color
			Bezel	Dial 12H	Dial 1-11H	Hand Hour/Min.	Sec.	
3402	Black	Black	Green	Orange	Green	Green	Green	Steel PVD Black

### Main Characteristics

<b>Origin</b>	Swiss Made
<b>Always Visible</b>	Constant glow for up to 25 years in any light condition
<b>Size/Diameter</b>	43mm
<b>Water Resistance</b>	200 meters, 20 ATM, 600 feet, individually tested
<b>Movement</b>	Ronda 715 HH6 LITHIUM
<b>Battery/Battery life</b>	CR2016/10 years
<b>Case</b>	316L stainless steel PVD Black
<b>Bezel</b>	316L stainless steel PVD Black, unidirectional turning bezel, at 12h fitted with colored light tube with sapphire crystal
<b>Case back</b>	316L stainless steel PVD black, screwed
<b>Crystal</b>	Sapphire, single antireflective coated
<b>Crown</b>	316L stainless steel PVD black screwed
<b>Height</b>	12,38mm
<b>Weight</b>	94g PU strap, 176g steel bracelet

### Standard band

FP.L.IRB.1

FM.L.BRAC.3400

PU black with stainless steel brushed signature buckle, 22mm  
316L solid stainless steel bracelet with folded signature buckle, all PVD black, 22mm

### Standard Giftbox

GBO.L001

Giftbox square, grey, woven carbon fibre look at top 110 x 110 x 86 mm

### Manual

GGM.L002

Instruction Manual





(OD = Olive Drap, a military clothing colour)

# PORTRAIT SHEET



## OD MILITARY 3040 SERIES, 44 MM

- COLORS EVOKE THE STRENGTH OF THE ARMED FORCES
- 2 MATCHING BANDS ARE INCLUDED

Article	Case	Dial	Color of light tubes in darkness					Band/Color
			Bezel	Dial	Dial	Hand	Sec.	
				12H	1-11H	Hour/Min.		
3042	Green	Black/Green	Green	Orange	Green	Green	Ice Blue	Green Nato

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	44mm
Water Resistance	200 meters, 20 ATM, 660 feet, individually tested
Movement	RONDA 515 HH6
Battery/Battery life	395/60 months
Crystal	Mineral, especially hardened
Crown	316L stainless steel
Height	13,88mm
Weight	54g

Case for 3041	PC carbon reinforced
Bezel for 3041	PC fibreglass reinforced, unidirectional turning bezel, at 12h fitted with colored light tube with sapphire crystal.
Case back for 3041	PC carbon reinforced
Case for 3042 PC	fibreglass reinforced
Bezel for 3042 PC	carbon reinforced, unidirectional turning bezel, at 12h fitted with colored light tube with sapphire crystal.
Case back for 3042	PC fibreglass reinforced

### Standard band for 3041

FN.3900.26.3	Black nato strap, 22mm
FN.3900.60.3	Additional band included

### Standard band for 3042

FN.3900.60.3	Eyewear signature box 160x70x40mm, black exterior, grey interior
--------------	--

### Manual

GGM.L002.GMT	Instruction Manual
--------------	--------------------





**LIMITED EDITION**  
TO 500 UNITS WORLDWIDE

**PORTRAIT SHEET**



## SR-71 BLACKBIRD™ 9080 SERIES, 44 MM

- THE CROWN JEWEL OF LUMI-NOX'S PROPRIETARY COLLABORATION WITH LOCKHEED MARTIN
- IT CELEBRATES THE US AIR FORCE'S RECORD-SETTING SR-71 BLACKBIRD
- EVOKES THE LOOK AND SPIRIT OF THE LEGENDARY BLACK RECONNAISSANCE JET
- AUTOMATIC VALJOUX CHRONOGRAPH

Article	Case	Dial	Color of light tubes in darkness				Band/Color
			Bezel	Dial	Dial	Hand	
				12H	1-11H	Hour/Min.	
9086.BO	Steel PVD Black	Black/Black	Green	Green	Ice Blue	Green	Steel PVD black

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	44mm
Water Resistance	100 meters, 10 ATM, 330 feet, individually tested
Movement	Valjoux 7750, Automatic Chronograph
Battery/Battery life	
Case	316L stainless steel PVD Black
Bezel	Internal diving bezel with light tube, adjustable by crown at 10 o'clock
Case back	316L stainless steel PVD black, screwed, sapphire crystal
Crystal	Sapphire, single antireflective coated
Crown	316L, steel, IP black, screwed
Height	16mm
Weight	190g

### Standard band

FM.LBRAC.9080.60	316L solid stainless steel bracelet with folded signature buckle, all PVD black, 23mm
------------------	---

### Standard Giftbox

GBO.L018	Black watch box with removable insert, red EVA insert for leather pouch, red/black oval pillow for watch, size 264 x 214 x 100 mm
----------	---

### Manual

GGM.L002.GMT	Instruction Manual
GGM.L010	Automatic Chrono Manual





# PORTRAIT SHEET



## RECON NAV SPC 8830 SERIES, 46MM

- THIS WATCH IS A SIMPLE AND EFFICIENT NAVIGATION TOOL ON THE GROUND
- GMT FUNCTION TO SET A SECOND TIME ZONE
- IT ALSO OFFERS A TACHYMETER SCALED TO MEASURE WALKING SPEEDS
- STRAP HOLDS A REMOVABLE COMPASS

Article	Case	Dial	Color of light tubes in darkness					Band/Color
			Bezel	Dial	Dial	Hand	Big + Small	
				12H	1-11H	Hour/Min.	Sec.	
8831.KM	Black	Black	Yellow	Ice Blue	Yellow	Ice Blue	Yellow	Black PU
8832.MI	Black	Black	Yellow	Ice Blue	Yellow	Ice Blue	Yellow	Black PU

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	46mm
Water Resistance	200 meters, 20 ATM, 660 feet, individually tested
Movement	Ronda 515 2 <sup>nd</sup> Time Zone, Special HH
Battery/Battery life	395/ 60 months
Case	PC carbon reinforced
Bezel	PC carbon reinforced, unidirectional turning bezel, at 12h 1xYellow LLT protected by metalized sapphire glass window
Case back	316L stainless steel or PVD Black
Crystal	Sapphire, single antireflective coating
Crown	316L, steel, IP black, screwed
Height	13,10mm
Weight	72g

### Standard band

FP.8830.20	Black PU Strap with raised scale and loop lock, 24mm
------------	--

### Standard Giftbox

GBO.L014	Eyeware pouch for RECON, 170x80x85mm, black
----------	---

### Manual

GGM.L002.GMT	Instruction Manual
GGM.L029	Manual RECON





# PORTRAIT SHEET



## SR-71 BLACKBIRD TM 9060 SERIES, 44 MM

- THE CROWN JEWEL OF LUMI-NOX'S PROPRIETARY COLLABORATION WITH LOCKHEED MARTIN
- IT CELEBRATES THE US AIR FORCE'S RECORD-SETTING SR-71 BLACKBIRD
- EVOKES THE LOOK AND SPIRIT OF THE LEGENDARY BLACK RECONNAISSANCE JET

Article	Case	Dial	Color of light tubes in darkness				Band/Color
			Bezel	Dial	Dial	Hand	
				12H	1-11H	Hour/Min. Sec.	
9062	Steel PVD Black	Black	Green	Yellow	Green	Green	Steel PVD black

### Main Characteristics

#### Origin

Swiss Made

#### Always Visible

Constant glow for up to 25 years in any light condition

#### Size/Diameter

44 mm

#### Water Resistance

100 meters, 10 ATM, 300 feet, individually tested

#### Movement

Ronda 5130.D Chrono ALARM

#### Battery/Battery life

395/48 month

#### Case

316L stainless steel PVD Black with LLT at 12H

#### Bezel

Internal diving bezel, adjustable by crown at 10 o'clock

#### Case back

316L stainless steel PVD black, screwed, soundbox

#### Crystal

Sapphire glass, single antireflective coated

#### Crown

316L stainless steel PVD black screwed

#### Height

14,40 mm

#### Weight

186 g

#### Standard band

FM.L.BRAC.9050

316L solid stainless steel bracelet with folded signature buckle, all PVD black, 23mm

#### Standard Giftbox

GBO.L005

SR-71 Black leather pouch + cardboard box with shield logo

#### Manual

GGM.L002

Instruction Manual





# PORTRAIT SHEET



## RECON POINT MAN 8820 SERIES, 45 MM

- THIS WATCH IS A SIMPLE AND EFFICIENT NAVIGATION TOOL FOR LAND USE
- IT CAN BE USED TO DETERMINE BEARINGS WHENEVER THE SUN IS VISIBLE
- IT ALSO OFFERS A TACHYMETER SCALED TO MEASURE WALKING SPEEDS
- THE BEZEL'S COMPASS ROSE HELPS TO ESTABLISH THE WEARER'S POSITION AND ORIENTEERING

Article	Case	Dial	Color of light tubes in darkness				Band/Color	
			Bezel	Dial	Dial	Hand		
			12H	1-11H	Hour/Min. Sec.			
8821.KM	PC Carbon	Black	Yellow	Ice Blue	Yellow Ice Blue	Yellow	Black PU	
8822.MI	PC Carbon	Black	Yellow	Ice Blue	Yellow Ice Blue	Yellow	Black PU	
8823.KM	PC Carbon	Black	Yellow	Ice Blue	Yellow Ice Blue	Yellow	Nato strap grey	
8824.MI	PC Carbon	Black	Yellow	Ice Blue	Yellow Ice Blue	Yellow	Nato strap grey	
8825.KM	PC Carbon	Black	Yellow	Ice Blue	Yellow Ice Blue	Yellow	Nato strap green	
8826.MI	PC Carbon	Black	Yellow	Ice Blue	Yellow Ice Blue	Yellow	Nato strap green	

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	45mm
Water Resistance	200 meters, 20 ATM, 660 feet, individually tested
Movement	Ronda 515 HH6
Battery/Battery life	395/60 months
Case	PC carbon reinforced
Bezel	PC carbon reinforced, unidirectional turning bezel, at 12h 1xYellow LLT protected by metalized sapphire glass window
Case back	316L stainless steel IP black
Crystal	Sapphire, single antireflective coating
Crown	316L, steel, IP black, screwed
Height	13,10mm
Weight	72g

### Standard band

FP.3050.20.BPL	23mm, black PU signature strap with steel brushed signature buckle, Loop-lock
FN.3900.80.	22mm, grey Nato signature strap with 2 brushed steel loops in front and 1 brushed steel loop in back
FN.3900.60.2	22mm, green Nato signature strap with 2 brushed steel loops in front and 1 brushed steel loop in back
FN.3900.80.3	22mm, grey Nylon signature strap with 2 brushed steel loops
FN.3900.60.3	22mm, green Nylon signature strap with 2 brushed steel loops

### Standard Giftbox

GBO.L014	Eyeware pouch for RECON, 170x80x85mm, black
----------	---

### Manual

GGM.L002.GMT	Instruction Manual
GGM.L019	Manuel RECON





# PORTRAIT SHEET



## DIVE CHRONOGRAPH 8360 SERIES, 44 MM

- A SERIOUS TIMEPIECE FOR DIVING  
- SAPPHIRE CRYSTAL

Article	Case	Dial	Color of light tubes in darkness					Band/Color
			Bezel	Dial 12H	Dial 1-11H	Hand Hour/Min.	Sec.	
8361	Steel PVD	Black	Green	Orange	Green	Green	SLC3*	PU Black
8362	Black	Black	Green	Orange	Green	Green	SLC3*	Steel PVD black

\* Superluminova

### Main Characteristics

#### Origin

Swiss Made

#### Always Visible

Constant glow for up to 25 years in any light condition

#### Size/Diameter

44mm

#### Water Resistance

200 meters, 20 ATM, 600 feet, individually tested

#### Movement

Ronda 5050.B BIG DATE

#### Battery/Battery life

395/54 month

#### Case

316L stainless steel PVD Black

#### Bezel

316L stainless steel PVD Black, unidirectional turning bezel, at 12h fitted with colored light tube with sapphire crystal

#### Case back

316L stainless steel PVD Black

#### Crystal

Sapphire, single antireflective coated

#### Crown

316L stainless steel PVD black screwed

#### Height

12,26 mm

#### Weight

122g PU strap, 192g steel bracelet

### Standard band

FP.8050.20

PU black with st. steel brushed signature buckle, 23mm

FM.L.BRAC.8360

316L solid stainless steel bracelet with folded signature buckle, all PVD black, 23mm

### Standard Giftbox

GBO.L001

Giftbox square, grey, woven carbon fibre look at top 110 x 110 x 86 mm

### Manual

GGM.L002

Instruction Manual





# PORTRAIT SHEET



## BLACK OPS CARBON 8800 SERIES, 44 MM

- IDEAL WATCH FOR THE ADVENTURER
- FRESH IN DESIGN AND TOUGH IN CONSTRUCTION

Article	Case	Dial	Color of light tubes in darkness					Band/Color
			Bezel	Dial 12H	Dial 1–11H	Hand Hour/Min.	Sec.	
8802	Black	Grey/Black	Green	Orange	Green	Green	Green	Black PU
8815	Black	Black/Grey	Green	Orange	Green	Green	Green	Black PU
8817.GO	Green	Black/Green	Green	Orange	Green	Green	Green	Green Nato Strap

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	45mm
Water Resistance	200 meters, 20 ATM, 660 feet, individually tested
Movement	RONDA 515 HH6
Battery/Battery life	395/60 months
Case	Carbon reinforced PC with crown protection
Bezel	Carbon reinforced PC, unidirectional turning bezel, at 12h fitted with colored tube with sapphire crystal
Case back	Carbon reinforced PC
Crystal	Mineral, especially hardened
Crown	316L stainless steel
Height	13mm
Weight	55g

### Standard band

FP.8800.20	Black PU signature strap with steel brushed signature buckle, loop-lock, 23mm
FN.8800.60	Dark green Nato Strap with 2 Steel loops, 23mm

### Standard Giftbox

GBO.L002	Eyewear signature box 160x70x40mm, black exterior, grey interior
----------	--

### Manual

GGM.L001	Instruction Manual
----------	--------------------





# PORTRAIT SHEET



## BLACK OPS STEEL 8400 SERIES, 44 MM

- BLACK OPS ARE THE MILITARY'S MOST COVERT OPERATIONS
- THE BEZEL HAS HIGH CONTRAST WHITE NUMBERS AND MARKINGS FOR EASY REFERENCE
- PVD BLACK STAINLESS STEEL CASE, CASE BACK AND BEZEL

Article	Case	Dial	Color of light tubes in darkness				Band/Color	
			Bezel	Dial	Dial	Hand	Hour/Min.	Sec.
				12H	1-11H	Hour/Min.	Sec.	
8401	Steel PVD	Black/White	Green	Orange	Green	Green	Green	PU Black

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	44mm
Water Resistance	200 meters, 20 ATM, 600 feet, individually tested
Movement	Ronda 715 HH6
Battery/Battery life	395/60 months
Case	316L stainless steel PVD Black
Bezel	Carbon reinforced PC, unidirectional turning bezel, at 12h fitted with colored tube with sapphire crystal
Case back	316L stainless steel or PVD Black
Crystal	Mineral, especially hardened
Crown	316L stainless steel or PVD black
Height	12,70mm
Weight	101g

### Standard band

FP.L.IRB.1	PU black with st. steel brushed signature buckle, 22mm
------------	--

### Standard Giftbox

GBO.L001	Giftbox square, grey, woven carbon fibre look at top 110x110x86mm
----------	---

### Manual

GGM.L002	Instruction Manual
----------	--------------------





# PORTRAIT SHEET



## MODERN MARINER 38MM 7250 SERIES

- THESE WATCHES FOR WOMEN ARE BOTH ELEGANT AND DURABLE
- IDEAL FOR WOMEN WHO ENJOY AN ACTIVE LIFESTYLE
- BEAUTIFUL SATIN-FINISHED STEEL SURFACES

Article	Case	Dial	Color of light tubes in darkness				Band/Color
			Bezel	Dial	Dial	Hand	
				12H	1-11H	Hour/Min. Sec.	
7251	Steel	Black/L'grey	Ice Blue	Ice Blue	White	Ice Blue	Black leather
7251.BO	Steel black	Black	Ice Blue	Orange	Ice Blue	Ice Blue	Black leather
7252	Steel	Black/L'grey	Ice Blue	Ice Blue	White	Ice Blue	Steel bracelet
7252.BO	Steel black	Black	Ice blue	Orange	Ice Blue	Ice Blue	Steel bracelet black
7253	Steel	Black/Blue	Ice Blue	Ice Blue	White	Ice Blue	Black leather
7257	Steel	White/MOP*/Grey	Ice Blue	Ice Blue	White	Ice Blue	White leather
7258	Steel	White/MOP*/Grey	Ice Blue	Ice Blue	White	Ice Blue	Steel bracelet

\*White MOP (Mother of Pearl): Mollusca Pinctada Margaritifera, Indonesia

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	38mm
Water Resistance	200 meters, 20 ATM, 660 feet, individually tested
Movement	Ronda 705 HH6
Battery/Battery life	371/45 months
Case	316L steel with crown protection
Bezel	316L steel, unidirectional turning bezel, at 12h fitted with colored tube with sapphire crystal
Case back	316L steel, screwed
Crystal	Sapphire, single antireflective coating
Crown	316L stainless steel
Height	11,60 mm
Weight	70g leather band/102g bracelet

### Standard band

FE.7250.10Q	White leather with grey stitches, signature brushed buckle, 20mm
FE.7250.21Q	Black leather with blue stitches, signature brushed buckle, 20mm
FE.7250.22Q	Black leather with grey stitches, signature brushed buckle, 20mm
FE.7250.23B	Black leather with d'grey stitches, signature brushed buckle, 20mm
FM.L.BRAC.7250	Steel bracelet solid brushed 316L, folded signature brushed buckle, 20mm
FM.L.BRAC.7250.60	Steel bracelet solid brushed IP black 316L, folded signature buckle, 20mm

### Standard Giftbox

GBO.L001	Giftbox square, grey, woven carbon fibre look at top 110 x 110 x 86 mm
----------	--

### Manual

GGM.L002.GMT	Instruction Manual
--------------	--------------------





# PORTRAIT SHEET



## NAVY SEAL COLOMARK 7050 SERIES, 38 MM

- SMALLER VERSION OF THE PHENOMENALLY SUCCESSFUL COLOMARK COLLECTION
- FOR MEN AND LADIES WHO LOVE THE ORIGINAL BUT LIKE IT SMALLER
- ALL MODELS FEATURE A COLOR-COORDINATED LUMINOUS PATTERN

Article	Case	Dial	Color of light tubes in darkness					Band/Color
			Bezel	Dial	Dial	Hand		
				12H	1-11H	Hour/Min.	Sec.	
7051	Black	Black/White	Green	Green	Green	Green	Green	Black PU
7051.BO	Black	Black/Black	Ice Blue	Yellow	Ice Blue	Ice Blue	Ice Blue	Black PU
7065	Black	Black/Pink	Ice Blue	Ice Blue	Ice Blue	Green	Green	Black PU
7057.WO	White	White/Silver		Ice Blue	White	White	White	White Silicon

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	38mm
Water Resistance	200 meters, 20 ATM, 660 feet, individually tested
Movement	Ronda 505 HH6
Battery/Battery life	371/56 months
Case*	Carbon reinforced PC
Bezel*	Carbon reinforced PC, unidirectional turning bezel, at 12h fitted with colored light tube with sapphire crystal
Case back*	Carbon reinforced PC
	Crystal Mineral, especially hardened
	Crown 316L stainless steel
Height	11,80mm
Weight	39g
*7057.WO	fibreglass polymer reinforced

### Standard band

FP.7050.20	Black PU signature strap with steel brushed signature buckle, Loop-lock, 20mm
FP.7050.10	White Silicon signature strap with steel brushed buckle

### Standard Giftbox

GBO.L002	Eyewear signature box 160x70x40mm, black exterior, grey interior
----------	--

### Manual

GGM.L002.GMT	Instruction Manual
--------------	--------------------





# PORTRAIT SHEET



## DIVE CHRONOGRAPH 8100/8300 SERIES, 44 MM

- A SERIOUS TIMEPIECE FOR DIVING
- SAPPHIRE CRYSTAL
- RED PUSHER

Article	Case	Dial	Color of light tubes in darkness				Band/Color
			Bezel	Dial	Dial	Hand	
			12H	1-11H	Hour/Min. Sec.		
8153.RP	Steel	Blue	Yellow	Blue	Blue	SLC3	PU Black
8154.RP	Steel	Blue	Yellow	Blue	Blue	SLC3	Steel
8362.RP	Steel Black	Black	Yellow	Blue	Blue	SLC3	Steel IP Black

### Main Characteristics

Origin

Swiss Made

Always Visible

Constant glow for up to 25 years in any light condition

Size/Diameter

44mm

Water Resistance

200 meters, 20 ATM, 660 feet, individually tested

Movement

Ronda 5050.B BIG DATE

Battery/Battery life

395/54 months

Case

316L stainless steel PVD Black

Bezel

316L stainless steel PVD Black, unidirectional turning bezel, at 12h fitted with colored light tube with sapphire crystal

Case back

316L stainless steel PVD Black

Crystal

Sapphire, single antireflective coated

Crown

316L stainless steel PVD black screwed

Height

12,90 mm

Weight

122g PU strap, 192g steel bracelet

### Standard band

FP.8050.20

PU black with stainless steel brushed signature buckle, 22mm

FM.L.BRAC.8050

316L solid stainless steel bracelet with signature buckle, 22mm

FM.L.BRAC.8360

316L solid stainless steel bracelet with folded signature buckle, all IP black, 22mm

### Standard Giftbox

GBO.L001

Giftbox square, grey, woven carbon fibre look at top 110 x 110 x 86 mm

### Manual

GGM.L002.GMT

Instruction Manual

GGM.L027

Chrono Instruction Manual





# PORTRAIT SHEET



## MODERN MARINER AUTOMATIC 6500 SERIES, 45MM

- NAUTICAL INSPIRED FEATURES
- SWISS MECHANICAL MOVEMENT
- POLISHED SILVER INDICES
- LEATHER OR BRACELET BAND

Article	Case	Dial	Color of light tubes in darkness					Band/Color
			Bezel	Dial	Dial	Hand		
				12H	1-11H	Hour/Min.	Sec.	
6501	Steel	Black	Ice Blue	Ice Blue	Green	Ice Blue	Ice Blue	Black leather
6501.BO	Steel Black	Black	Ice Blue	Orange	Ice Blue	Ice Blue	Ice Blue	Black leather
6502	Steel	Black	Ice Blue	Ice Blue	Green	Ice Blue	Ice Blue	Steel Bracelet
6502.BO	Steel Black	Black	Ice Blue	Orange	Ice Blue	Ice Bue	Ice Blue	Black Steel Bracelet

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	45mm
Water Resistance	200 meters, 20 ATM, 600 feet, individually tested
Movement	SW220-1 special HH
Battery/Battery life	
Case	316L stainless steel with crown protection
Bezel	316L stainless steel, unidirectional turning bezel, at 12h fitted with colored light tube with sapphire crystal
Case back	Sapphire glass, single antireflective coating
Crystal	Sapphire, single antireflective coated
Crown	316L stainless steel, screwed
Height	15mm
Weight	98g

### Standard band

FP. 6250.20Q	black leather with black stitches, red lining, signature brushed buckle, 24mm
FE.6250.22B	black leather with d'grey stitches, IP black signature brushed buckle, 24mm
FM.L.BRAC.6500	316L solid brushed steel bracelet, folded signature brushed buckle, 24mm
FM.LBRAC.6500.60	316L solid brushed steel bracelet IP black, folded signature buckle, 24mm

### Standard Giftbox

GBO.L001	Giftbox square, black, woven look top 110 x 110 x 86mm
----------	--

### Manual

GGM.L002.GMT	Instruction Manual
GGM.L013	Automatic instruction manual





# PORTRAIT SHEET



## F-117 NIGHTHAWK™ 6400 SERIES 45 MM

- ORIGINAL F-117 NIGHTHAWK LICENSED BY LOCKHEED MARTIN
- ESPECIALLY DESIGNED FOR US AIR FORCE PILOTS FLYING THE F-117 NIGHTHAWK STEALTH JETS
- THE CASE HAS A DETAILED ENGRAVING OF THE F-117 NIGHTHAWK STEALTH JET
- A LARGER, BOLDER, MORE ANGULAR DESIGN THEN 3400 SERIES

Article	Case	Dial	Color of light tubes in darkness					Band/Color
			Bezel	Dial	Dial	Hand		
				12H	1-11H	Hour/Min.	Sec.	
6402	Black	Black/White	Green	Orange	Green	Green	Green	Steel PVD Black
6402.BO	Black	Black/Black	Ice Blue	Orange	Ice Blue	Ice blue	Ice Blue	Steel PVD Black

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	45mm
Water Resistance	200 meters, 20 ATM, 600 feet, individually tested
Movement	Ronda 715 Lith HH6
Battery/Battery life	CR2016/10 years *
Case	316L stainless steel PVD Black
Bezel	316L stainless steel PVD Black, unidirectional turning bezel, at 12h fitted with colored light tube with sapphire glass crystal
Case back	316L stainless steel PVD black, screwed
Crystal	Sapphire, single antireflective coated
Crown	316L stainless steel PVD black screwed
Height	12,38mm
Weight	102g

\* Due to the additional weight of the LLTs on the watch hands, battery life may be shorter

### Standard band

FP.6401.20	PU black with stainless steel brushed signature buckle, 23mm
FM.L.BRAC.6400	316L solid stainless steel bracelet with folded signature buckle, all PVD black, 23mm

### Standard Giftbox

GBO.L001	Giftbox square, grey, woven carbon fibre look at top 110 x 110 x 86 mm
----------	--

### Manual

GGM.L002. GMT	Instruction Manual
GGM.L018	Lockheed Martin Certificate





# PORTRAIT SHEET



## F-22 RAPTOR 9270 SERIES, 44 MM

- TRIBUTE TO LOCKHEED MARTIN'S NEWEST STEALTH FIGHTER F-22 RAPTOR
- ULTRALIGHT TITANIUM. TITANIUM KNOWN TO BE LIGHT, SUPER HARD, NON-ALLERGIC
- THE SHAPE OF THE WATCH WAS DIRECTLY INFLUENCED BY THE F-22 AIRCRAFT

Article	Case	Dial	Color of light tubes in darkness				Band/Color
			Bezel	Dial	Hand		
			12H	1–11H	Hour/Min.	Sec.	
9272	Titanium	Black	Orange	Green	Green	Green	PVD Black
9278	Titanium	Black	Orange	Green	Green	Green	Black Leather

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	44mm
Water Resistance	200 meters, 20 ATM, 660 feet, individually tested
Movement	Ronda 5050.C Chronograph-Big Date at 6h, Day at 12h, Special HH
Battery/Battery life	395 / 54 month
Case	Titanium case
Bezel	Titanium bezel with aluminum ring, bidirectional turning bezel
Case back	Titanium screwed
Crystal	Sapphire glass, single antireflective coated
Crown	Titanium, screwed
Height	14,10mm
Weight	98g leather band/120g bracelet

### Standard band

FM.L.BRAC.9200TI  
FE.9200.21TI

Titanium PVD black bracelet with signature buckle, 24mm  
Black genuine leather strap with insert red center line,  
Titanium PVD Black signature buckle, 24mm

### Standard Giftbox

GBO.L010.F22

Wooden box, 140 x 140 x 97mm with F-22 picture on top

### Manual

GGM.L002.GMT  
GGM.L001

Instruction Manual  
Chrono Instruction Manual





# PORTRAIT SHEET



## F-35 LIGHTNING II™ 9380 SERIES, 45 MM

- BI-DIRECTIONAL ROTATING BEZEL WITH A SLIDE RULE RING AND A DIAL RING WITH TACHYMETRIC SCALE
- THE TACHYMETER INDICATES RATES OF SPEED (KMH OR M) OR NAUTICAL MILES
- THE SLIDE RULE BEZEL CAN BE USED TO CALCULATE DISTANCES, FLIGHT TIMES AND FUEL CONSUMPTION

Article	Case	Dial Bezel	Color of light tubes in darkness				Band/Color
			Dial	Dial	Hand	Hour/Min. Sec.	
9382	Steel	Black/Orange		Orange	Green	Green	Steel Bracelet
9388	Steel	Black/Orange		Orange	Green	Green	Black Leather

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	45mm
Water Resistance	200 meters, 20 ATM, 660 feet, individually tested
Movement	Ronda 5050.B Chronograph-Big Date at 6H, Special HH
Battery/Battery life	395/54 months
Case	316L stainless steel brushed
Bezel	316L stainless steel brushed with black alu ring, bidirectional turning bezel
Case back	316L stainless steel brushed, screwed
Crystal	Sapphire glass, single antireflective coated
Crown	316L stainless steel brushed, screwed
Height	12,50mm
Weight	100g leather band/200g bracelet

### Standard band

FE.9380.20Q	Black leather strap with orange stitches and steel signature buckle, 24mm
FM.L.BRAC.9380	316L steel brushed bracelet with steel signature buckle, 24mm

### Standard Giftbox

GBO.L010.F35	Wooden box, 140 x 140 x 97mm with F-35 picture on top
--------------	---

### Manual

GGM.L002.GMT	Instruction Manual
GGM.L001	Chrono Instruction Manual





# PORTRAIT SHEET



## FIELD ATACAMA DAY DATE 1820 SERIES, 42 MM

- THE ATACAMA DESERT IN CHILE IS ONE OF THE DRIEST AREAS IN THE WORLD
- TO CATCH THE FEELING OF THIS REGION, THIS SERIES EMPLOYS GUN METAL COLORED STEEL CASES AND BUCKLES
- SUEDED LEATHER STRAPS

Article	Case	Dial	Color of light tubes in darkness				Band/Color
			Bezel	Dial 12H	Dial 1-11H	Hand Hour/Min. Sec.	
1823	Steel PVD GUN	Blue/Grey		Orange	Green	Green	Grey leather
1824	Steel PVD GUN	Blue/Grey		Orange	Green	Green	Metal bracelet PVD Gun
1833	Steel PVD GUN	Black/Safari		Orange	Green	Green	Safari leather

### Main Characteristics

#### Origin

Swiss Made

#### Always Visible

Constant glow for up to 25 years in any light condition

#### Size/Diameter

42mm

#### Water Resistance

200 meters, 20 ATM, 600 feet, individually tested

#### Movement

RONDA 517 Day-Date, HH6

#### Battery/Battery life

395/50 month

#### Case

316L stainless steel PVD Gun

#### Bezel

316L stainless steel PVD Gun

#### Case back

316L stainless steel PVD Gun, screwed

#### Crystal

Sapphire, single antireflective coated

#### Crown

316L stainless steel PVD Gun, screwed

#### Height

10,8mm

#### Weight

86g leather strap/166g metal bracelet

### Standard band

FM.L.BRAC.1820.IP

FE.1820.80H.80RI

FE.1820.72H.80RI

FE.1820.73H.80RI

316L solid PVD gun steel bracelet with PVD gun solid signature buckle, 23mm  
Grey leather, decorated PVD gun steel rivets, with PVD gun steel buckle, 23mm  
Tan leather, decorated PVD gun steel rivets, with PVD gun steel buckle, 23mm  
Safari leather, decorated PVD gun steel rivets, with PVD gun steel buckle, 23mm

### Standard Giftbox

GBO.L001

Giftbox square, grey woven carbon fibre look at top, size 110 x 110 x 84 mm

### Manual

GGM.L002

Instruction Manual





# PORTRAIT SHEET



## NAVY SEAL COLOMARK 3050 SERIES, 44 MM

- THIS WATCH IS THE ORIGIN OF LUMINOX
- DESIGNED FOR USE UNDER DEMANDING CONDITIONS
- BESTSELLER UNTIL TODAY

Article	Case	Dial	Color of light tubes in darkness					Band/Color
			Bezel	Dial	Dial	Hand		
				12H	1-11H	Hour/Min.	Sec.	
3051	Black	Black/White	Green	Green	Blue	Green	Green	Black PU
3051.BO	Black	Black	Ice Blue	Orange	Ice Blue	Ice Blue	Ice Blue	Black PU
3052	Black	Black/White	Green	Green	Blue	Green	Green	Black Polym.Bracelet
3052.BO	Black	Black	Ice Blue	Orange	Ice Blue	Ice Blue	Ice Blue	Black Polym. Bracelet
3053	Black	Black/Blue	Yellow	Yellow	Blue	Yellow	Ice Blue	Black PU
3057.WO	White	White/Silver	Ice Blue	Ice Blue	White	White	White	White PU
3059	Black	Black/Orange	Orange	Orange	Yellow	Yellow	Green	Black PU
3067	Black	Black/Green	Ice Blue	Ice Blue	Green	Ice Blue	Green	Black PU

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	44mm
Water Resistance	200 meters, 20 ATM, 660 feet, individually tested
Movement	RONDA 515 HH6
Battery/Battery life	395/60 months
Case	PC carbon reinforced (white case/bezel/case back: PC glass-fibre reinforced)
Bezel	PC carbon reinforced, unidirectional turning bezel, at 12h fitted with colored light tube with sapphire crystal.
Case back	PC carbon reinforced
Crystal	Mineral, especially hardened
Crown	316L stainless steel
Height	13,88mm
Weight	56g
Weight (3052, 3052.BO)	73g

### Standard band

FP.3050.20	Black PU signature strap with steel brushed signature buckle, loop-lock, 23mm
FP.3050.10	White PU signature strap with steel brushed signature buckle, loop-lock, 23mm
FP.3050.23BPL	Black Polymer bracelet with IP black signature buckle, 23mm

### Standard Giftbox

GBO.L002.GMT	Eyewear signature box 160x70 x40mm, black exterior, grey interior
--------------	---

### Manual

GGM.L002 Edition 03.14	Instruction Manual
---------------------------	--------------------





- SCOTT CASSELL IS AN UNDERWATER EXPLORER AND COMBAT DIVER
- LUMI-NOX SUPPORTS SCOTT'S UNDERSEA VOYAGER PROJECT WITH PROCEEDS FROM THE SALE OF THIS SERIES.

Article	Case	Dial	Color of light tubes in darkness			Band/Color	
			Bezel	Dial	Dial		
			12H			Hour/Min./Sec.	
3059.SET	Black Carbon	Orange	Ice Blue	Green	Ice Blue	Green/Ice Blue/Green	Black PU

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	44mm
Water Resistance	200 meters, 20 ATM, 660 feet, individually tested.
Movement	Ronda 515 HH6
Battery/Battery life	395/60 months
Case	PC carbon reinforced
Bezel	PC carbon reinforced, unidirectional turning bezel, at 12h fitted with ice blue light tube
Case back	PC carbon reinforced
Crystal	Mineral, especially hardened
Crown	316L Stainless steel
Height	10.95mm
Weight	40g

### Standard band

FP.3050.20 Black PU signature strap with steel brushed signature buckle, loop-lock, 23mm


### Standard Giftbox

Set includes 3 interchangeable straps: one PU, one NATO style and one Velcro FastStrap with the Undersea Voyager giant squid logo, a strap extender, a changing tool and a compass

## Manual

GGM.L002.GMT	Instruction Manual
GGM.L020	Special Booklet



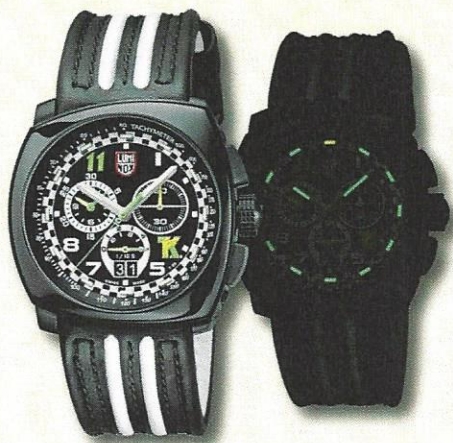

# PORTRAIT SHEET



## TONY KANAAN 1140 SERIES, 44 MM

**LIMITED EDITION**  
TO 999 UNITS WORLDWIDE

- SPECIAL SERIES DEVELOPED FOR INDY 500 CHAMPION RACE DRIVER TONY KANAAN
- STRIKING TIMEPIECE WITH AN ASYMMETRICAL 3-LAYER CASE

Article	Case	Dial	Color of light tubes in darkness				Band/Color
			Bezel	Dial	Dial	Hand	
				12H	1-11H	Hour/Min. Sec.	
1142	Steel PVD Black	Black/White		Green	Yellow	Green	Black/White Leather
1143	Steel PVD Black	Black/White		Green	Yellow	Green	Black/White Leather

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	44mm
Water Resistance	100 meters, 10 ATM, 300 feet, individually tested
Movement	Ronda 5050.B Chronograph-Big Date Special HH
Battery/Battery life	395/54 months
Case	316L stainless steel PVD Black, Carbon inlay on sides
Bezel	Fixed black or white ceramic bezel
Case back	316L stainless steel PVD black, screwed, numbering 001/999
Crystal	Sapphire, single antireflective coated
Crown	316L stainless steel PVD black
Height	15,45mm
Weight	115g

### Standard band

FE.1140.21B	Black leather strap with white stripes and black stitches, 26mm
-------------	---

### Standard Giftbox

GBO.L010.TK	Wooden box, 140 x 140 x 100mm
-------------	-------------------------------

### Manual

GGM.L002.GMT	Instruction Manual
GGM.L016.1140.2	Certificate
GGM.L001	Chrono Instruction Manual





**PORTRAIT SHEET**



## LUMI-NOX WALL CLOCK

- INCLUDES LED TUBES THAT GLOW IN THE DARK
- FOR RETAILERS, HOTEL LOBBYS, OFFICES
- RUNS ON BATTERY OR POWER SUPPLY

Article	Case	Dial	Color of LED tubes in darkness			
			Bezel	Dial	Dial	Hands (with coated tubes) Hour/Min.
				12H	1-11H	
A.BIG.40	Plastic ABS	Black	Green	Orange	Green	Green

### Main Characteristics

Origin	Made in China
Size/Diameter	40cm
Height	9.2cm
Water Resistance	none
Movement	Seiko 44505F
Battery	2AA
Power Supply	110/220 AC/DC
Case	Plastic ABS
Glass	Plastic ABS

### Standard Giftbox

GBO.I020	Black Cardboard Box with foam inlay, with handle, 486x130x543mm
----------	---

### Manual

GGM.I033	Instruction Manual
----------	--------------------





# PORTRAIT SHEET



## NAVY SEAL COLOMARK CHRONOGRAPH 3080 SERIES, 44 MM

- THE CRYSTAL IS HARDENED AND TEMPERED, HIGHLY SCRATCH RESISTANT
- CASE, CASE BACK AND BEZEL ARE MADE OF MOLDED CARBON-REINFORCED POLYMER

Article	Case	Dial	Color of light tubes in darkness					Band/Color
			Bezel	Dial	Dial	Hand		
				12H	1-11H	Hour/Min.	Sec.	
3081	Black	Black/White	Green	Green	Ice Blue	Ice Blue	Green	Black PU
3081.BO	Black	Black/Black	Ice Blue	Orange	Ice Blue	Ice Blue	Ice Blue	Black PU
3082	Black	Black/White	Green	Green	Ice Blue	Ice Blue	Green	Black Polym. Bracelet
3082.BO	Black	Black/Black	Ice Blue	Orange	Ice Blue	Ice Blue	Ice Blue	Black Polym. Bracelet
3083	Black	Black/Blue	Yellow	Yellow	Ice Blue	Ice Blue	Yellow	Black PU
3089	Black	Black/Orange	Orange	Orange	Ice Blue	Yellow	Yellow	Black PU

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	44mm
Water Resistance	200 meters, 20 ATM, 600 feet, individually tested
Movement	Ronda 5030.D
Battery/Battery life	395/54 months
Case	PC carbon reinforced
Bezel	PC carbon reinforced, unidirectional turning bezel, at 12h fitted with colored light tube with sapphire crystal.
Case back	PC carbon reinforced
Crystal	Mineral, especially hardened
Crown	316L stainless steel
Height	14,60mm
Weight	14,60mm

### Standard band

FP3050.20	Black PU signature strap with steel brushed signature buckle, loop-lock, 23mm
FP.3050.23BPL	Black Polymer bracelet with IP black signature buckle, 23mm

### Standard Giftbox

GBO.L002	Eyewear signature box 160x70x40mm, black exterior, grey interior
----------	--

### Manual

GGM.L001	Instruction Manual
GGM.L014	Chrono Instruction Manual





# PORTRAIT SHEET



## SCOTT CASSELL DEEP DIVE SPECIAL EDITION 1526, 44MM

- SCOTT CASSELL IS AN UNDERWATER EXPLORER AND COMBAT DIVER
- LUMI-NOX SUPPORTS SCOTT'S UNDERSEA VOYAGER PROJECT WITH PROCEEDS FROM THE SALE OF THIS SERIES

Article	Case	Dial	Color of light tubes in darkness				Band/Color
			Bezel	Dial	Dial	Hand	
			12H			Hour/Min./Sec.	
1526	Stainl. Steel	Black/Yellow	Yellow	8x Yellow	3xWhite	Yellow/White/Yellow	Black PU

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	44mm
Water Resistance	500 meters, 50 ATM, 1500 feet, individually tested. Professional Divers Norm ISO 6425 passed.
Movement	Swiss Mechanical Movement SW 200-1
Battery/Battery life	
Case	316L stainless steel PVD Black, Helium release valve
Bezel	316L stainless steel in PVD Black, unidirectional turning bezel, at 12h fitted with yellow light tube with sapphire crystal. Patent pending, blocking system bezel und crown protection lever
Case back	316L stainless steel PVD black, screwed, numbered
Crystal	Sapphire, double side antireflective coated
Crown	Stainless steel 316L, PVD black
Height	17.05mm
Weight	158g

### Standard band

FP.1500.20	PU black with stainless steel PVD black buckle with loop-lock
FP.1500.21	PU black extender with stainless steel PVD black buckle, 30mm, with loop-lock

### Standard Giftbox

GBO.L012	Deep Dive Special water resistant black plastic box with pressure release, 210 x 167 x 90mm, packed in black solid cardboard box
----------	--

### Manual

GGM.L002.GMT	Instruction Manual
GGM.L015.1500	Special Booklet
GGM.L013	Automatic Instruction Manual





# PORTRAIT SHEET



## NAVY SEAL COLORMARK 3050 SERIES, 44 MM

- THIS WATCH IS THE ORIGIN OF LUMINOX
- DESIGNED FOR USE UNDER DEMANDING CONDITIONS
- BESTSELLER UNTIL TODAY

Article	Case	Dial	Color of light tubes in darkness					Band/Color
			Bezel	Dial	Dial	Hand		
				12H	1-11H	Hour/Min.	Sec.	
3051	Black	Black/White	Green	Green	Blue	Green	Green	Black PU
3051.BO	Black	Black	Ice Blue	Orange	Ice Blue	Ice Blue	Ice Blue	Black PU
3052	Black	Black/White	Green	Green	Blue	Green	Green	Black PU Bracelet
3052.BO	Black	Black	Ice Blue	Orange	Ice Blue	Ice Blue	Ice Blue	Black PU Bracelet
3053	Black	Black/Blue	Yellow	Yellow	Blue	Yellow	Ice Blue	Black PU
3057.WO	White	White/Silver	Ice Blue	Ice Blue	White	White	White	White PU
3159	Black	Black/Orange	Orange	Orange	Yellow	Yellow	Green	Black PU
3167	Black	Black/Green	Ice Blue	Ice Blue	Green	Ice Blue	Green	Black PU

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	44mm
Water Resistance	200 meters, 20 ATM, 660 feet, individually tested
Movement	RONDA 515 HH6
Battery/Battery life	395/60 months
Case	PC carbon reinforced (white case/bezel/case back: PC glass-fibre reinforced)
Bezel	PC carbon reinforced, unidirectional turning bezel, at 12h fitted with colored light tube with sapphire crystal.
Case back	PC carbon reinforced
Crystal	Mineral, especially hardened
Crown	316L stainless steel
Height	13,88mm
Weight	65g

### Standard band

FP.3050.20	Black PU signature strap with steel brushed signature buckle, loop-lock, 23mm
FP.3050.10	White PU signature strap with steel brushed signature buckle, loop-lock, 23mm
FP.3050.23	Black Polymer bracelet with IP black signature buckle, 23mm

### Standard Giftbox

GBO.L002	Eyewear signature box 160x70 x40mm, black exterior, grey interior
----------	---

### Manual

GGM.L002	Instruction Manual
----------	--------------------





# PORTRAIT SHEET



## NAVY SEAL COLOMARK CHRONOGRAPH 3080 SERIES, 44 MM

- THE CRYSTAL IS HARDENED AND TEMPERED, HIGHLY SCRATCH RESISTANT
- CASE, CASE BACK AND BEZEL ARE MADE OF MOLDED CARBON-REINFORCED POLYMER

Article	Case	Dial	Color of light tubes in darkness					Band/Color
			Bezel	Dial	Dial	Hand		
				12H	1-11H	Hour/Min.	Sec.	
3081	Black	Black/White	Green	Green	Ice Blue	Ice Blue	Green	Black PU
3081.BO	Black	Black/Black	Ice Blue	Orange	Ice Blue	Ice Blue	Ice Blue	Black PU
3082	Black	Black/White	Green	Green	Ice Blue	Ice Blue	Green	Black PU Bracelet
3082.BO	Black	Black/Black	Ice Blue	Orange	Ice Blue	Ice Blue	Ice Blue	Black PU Bracelet
3083	Black	Black/Blue	Yellow	Yellow	Ice Blue	Ice Blue	Yellow	Black PU
3089	Black	Black/Orange	Orange	Orange	Ice Blue	Yellow	Yellow	Black PU

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	44mm
Water Resistance	200 meters, 20 ATM, 660 feet, individually tested
Movement	Ronda 5030.D
Battery/Battery life	395/54 months
Case	PC carbon reinforced
Bezel	PC carbon reinforced, unidirectional turning bezel, at 12h fitted with colored light tube with sapphire crystal.
Case back	PC carbon reinforced
Crystal	Mineral, especially hardened
Crown	316L stainless steel
Height	14,60mm
Weight	14,60mm

### Standard band

FP3050.20	Black PU signature strap with steel brushed signature buckle, loop-lock, 23mm
FP.3050.23	Black Polymer bracelet with IP black signature buckle, 23mm

### Standard Giftbox

GBO.L002	Eyewear signature box 160x70x40mm, black exterior, grey interior
----------	--

### Manual

GGM.L001	Instruction Manual
GGM.L014	Chrono Instruction Manual





# PORTRAIT SHEET



## FIELD ATACAMA CHRONOGRAPH ALARM 1840 SERIES, 42 MM

- THE ATACAMA DESERT IN CHILE IS ONE OF THE DRIEST AREAS IN THE WORLD
- TO CATCH THE FEELING OF THIS REGION, THIS SERIES EMPLOYS GUN METAL COLORED STEEL CASES AND BUCKLES
- SUEDED LEATHER STRAPS

Article	Case	Dial	Color of light tubes in darkness				Band/Color
			Bezel	Dial 12H	Dial 1-11H	Hand Hour/Min. Sec.	
1843	Steel PVD GUN	Blue/Grey		Orange	Green	Green	Grey leather
1844	Steel PVD GUN	Blue/Grey		Orange	Green	Green	Metal bracelet PVD Gun
1845	Steel PVD GUN	Black/Tan		Orange	Green	Green	Tan leather
1853	Steel PVD GUN	Black/Safari		Orange	Green	Green	Safari leather

### Main Characteristics

<b>Origin</b>	Swiss Made
<b>Always Visible</b>	Constant glow for up to 25 years in any light condition
<b>Size/Diameter</b>	42mm
<b>Water Resistance</b>	100 meters, 10 ATM, 300 feet, individually tested
<b>Movement</b>	RONDA 5130.D Chronograph Alarm
<b>Battery/Battery life</b>	395/48 month
<b>Case</b>	316L stainless steel PVD Gun
<b>Bezel</b>	316L stainless steel PVD Gun
<b>Case back</b>	316L stainless steel PVD Gun, screwed, soundbox
<b>Crystal</b>	Sapphire, single antireflective coated
<b>Crown</b>	316L stainless steel PVD Gun, screwed
<b>Height</b>	13,6mm
<b>Weight</b>	91g leather band/162g bracelet

### Standard band

FM.L.BRAC.1820.IP  
FE.1820.80H.80RI  
FE.1820.72H.80RI  
FE.1820.73H.80RI

316L solid PVD gun steel bracelet with PVD gun solid signature buckle, 23mm  
Grey leather, decorated PVD gun steel rivets, with PVD gun steel buckle, 23mm  
Tan leather, decorated PVD gun steel rivets, with PVD gun steel buckle, 23mm  
Safari leather, decorated PVD gun steel rivets, with PVD gun steel buckle, 23mm

### Standard Giftbox

GBO.L001

Giftbox square, grey woven carbon fibre look at top, size 110 x 110 x 84 mm

### Manual

GGM.L002

Instruction Manual





# PORTRAIT SHEET



## FIELD ATACAMA CHRONOGRAPH ALARM 1880 SERIES, 47 MM

- THE ATACAMA DESERT IN CHILE IS ONE OF THE DRIEST AREAS IN THE WORLD
- TO CATCH THE FEELING OF THIS REGION, THIS SERIES EMPLOYS GUN METAL COLORED STEEL CASES AND BUCKLES

Article	Case	Dial	Color of light tubes in darkness				Band/Color
			Bezel	Dial 12H	Dial 1-11H	Hand Hour/Min. Sec.	
1883	Steel PVD GUN	Blue/Grey		Orange	Green	Green	Grey leather
1885	Steel PVD GUN	Black/Tan		Orange	Green	Green	Tan leather
1893	Steel PVD GUN	Black/Safari		Orange	Green	Green	Safari leather

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	47mm
Water Resistance	100 meters, 10 ATM, 300 feet, individually tested
Movement	RONDA 530.D Chronograph Alarm
Battery/Battery life	395/48 months
Case	316L stainless steel or PVD Gun
Bezel	316L stainless steel or PVD Gun, fix bezel
Case back	316L stainless steel or PVD Gun, screwed, soundbox
Crystal	Sapphire, single antireflective coated
Crown	316L stainless steel or PVD Gun, screwed
Height	13,6mm
Weight	88g

### Standard band

FE.1880.80H.80RI	Dark grey leather, decorated PVD gun steel rivets, with PVD gun steel buckle, 26mm
FE.1880.72H.80RI	Tan leather, decorated PVD gun steel rivets, with PVD gun steel buckle, 26mm
FE.1880.73H.80RI	Safari leather, decorated PVD gun steel rivets, with PVD gun steel buckle, 26mm

### Standard Giftbox

GBO.L001	Giftbox square, grey woven carbon fibre look at top, size 110 x 110 x 84 mm
----------	---

### Manual

GGM.L002	Instruction Manual
----------	--------------------





# PORTRAIT SHEET



## TONY KANAAN 1100 SERIES, 44 MM

- SPECIAL SERIES DEVELOPED FOR INDY 500 CHAMPION RACE DRIVER TONY KANAAN
- STRIKING TIMEPIECE WITH AN ASYMMETRICAL CASE
- TK'S LOGO AT THE 4 HOUR ON THE DIAL

Article	Case	Dial	Color of light tubes in darkness				Band/Color
			Bezel	Dial	Dial	Hand	
				12H	1-11H	Hour/Min. Sec.	
1101	Black	Black/Yellow		Green	Yellow	Green	PU Black
1105	Black	Yellow/Black		Green	Yellow	Green	PU Black

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	44mm
Water Resistance	200 meters, 20 ATM, 660 feet, individually tested
Movement	Ronda 3540.D Chronograph
Battery/Battery life	395/54 months
Case	10% Carbon reinforced PC
Case back	10% Carbon reinforced PC
Glass	Mineral crystal
Crown	316L stainless steel PVD black
Height	15.45mm
Weight	115g

### Standard band

FP.1100.20	PU black with steel brushed, black plated buckle, 26mm
------------	--

### Standard Giftbox

GBO.L021.TK	Plastic watch box, size L 110 x H 88mm, covered with black matt paper with TK logo, Racing car signature, green pillow
-------------	--

### Manual

GGM.L002.GMT	Instruction Manual
GGM.L001	Chrono Instruction Manual
GGM.L016.1100	Certificate





# PORTRAIT SHEET



## P-38 LIGHTNING GMT 9420 SERIES, 44 MM

- TRIBUTE TO LOCKHEED MARTIN'S LEGENDARY TWIN-BOOMED WWII FIGHTER JET
- VINTAGE INSPIRED STYLING WITH CUSHION SHAPED CASE
- GMT FUNCTION TO SET A SECOND TIME ZONE

Article	Case	Dial	Color of light tubes in darkness				Band/Color	
			Bezel	Dial	Dial	Hand		
				12H	1-11H	Hour/Min.	Sec.	
9421	Steel	Black		Ice Blue	Yellow	Yellow	Ice Blue	Leather Black

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	44mm
Water Resistance	200 meters, 20 ATM, 660 feet, individually tested
Movement	Ronda 515 2nd Time Zone, Special HH
Battery/Battery life	395/60 months
Case	316L st. steel brushed
Bezel	316L st. steel brushed with black ring
Case back	316L st. steel brushed, screwed
Crown	316L st. steel brushed, screwed
Height	14mm
Weight	110g

### Standard band

FE.9200.20Q	Black leather strap with black stitches and steel signature buckle, 28mm
-------------	--

### Standard Giftbox

GBO.L017.P38	Wooden box, 140 x 140 x 100mm with P-38 picture on top
--------------	--

### Manual

GGM.L002.GMT	GMT Instruction Manual
--------------	------------------------





# PORTRAIT SHEET



## P-38 LIGHTNING CHRONOGRAPH 9440 SERIES, 44 MM

- TRIBUTE TO LOCKHEED MARTIN'S LEGENDARY TWIN-BOOMED WWII FIGHTER JET
- VINTAGE INSPIRED STYLING WITH CUSHION SHAPED CASE

Article	Case	Dial	Color of light tubes in darkness				Band/Color
			Bezel	Dial	Dial	Hand	
				12H	1-11H	Hour/Min. Sec.	
9441	Steel	Black		Ice Blue	Yellow	Yellow	Leather Black

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	44mm
Water Resistance	200 meters, 20 ATM, 660 ft, individually tested
Movement	Ronda 5020.B Chronograph Big Date at 6H
Battery	395/54 months
Case	316L st. steel brushed
Bezel	316L st. steel brushed with black ring, fix
Case back	316L st. steel brushed, screwed
Glass	Sapphire glass, single antireflective coated
Crown	316L st. steel brushed, screwed
Height	14mm
Weight	115g

### Standard band

FE.9200.20Q

Black leather strap with black stitches and steel signature buckle, 28mm

### Standard Giftbox

GBO.L017.P38


Wooden box, 140 x 140 x 100mm with P-38 picture on top

### Standard Manual

GGM.L002.GMT  
GGM.L001

Manual  
Chrono Instruction Manual



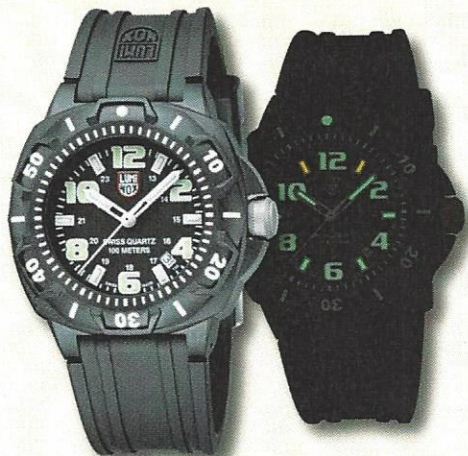

# PORTRAIT SHEET



## SENTRY 0200 SERIES, 43 MM

- A VINTAGE-INSPIRED CUSHION-SHAPED WATCH
- PERFECT TIMEPIECE FOR SPORTING AND OUTDOOR ENTHUSIASTS

Article	Case	Dial	Color of light tubes in darkness				Band/Color
			Bezel	Dial	Dial	Hand	
			1+11H	3,5,7,9H		Hour/Min.	2/4/6/8&10/12
0201.SL	Black	Black/White	SLC3	Orange	Green	Superluminous	Black PU
0201.BO	Black	Black/Black	SLC3	Orange	Ice Blue	Superluminous	Black PU
0215.SL	Black	Black/Red	SLC3	Orange	Green	Superluminous	Black PU

### Main Characteristics

Origin	Swiss Made
Always Visible	Constant glow for up to 25 years in any light condition
Size/Diameter	43mm
Water Resistance	100 meters, 10 ATM, 330 feet, individually tested
Movement	Ronda 515 HH6
Battery/Battery life	371/45 month
Case	Carbon reinforced PC
Bezel	Carbon reinforced PC, unidirectional turning bezel, at 12h fitted with colored light tube with sapphire crystal
Case back	Carbon reinforced PC
Crystal	Mineral, especially hardened
Crown	316L stainless steel
Height	14,06mm
Weight	60g

### Standard band

FP.0200.20

Black PU strap with steel signature brushed buckle, 22mm

### Standard Giftbox

GBO.L002

Eyewear signature box 160 x 70 x 40mm, black exterior, grey interior

### Manual

GGM.L002.GMT

Instruction Manual



Question #5



Example of "T25" marking on the dial, which is consistent with all Luminox Watches





Example of License Number engraved on case back of watch